

# FCC LTE REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> January 15, 2021
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Location:</b> HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	<b>Report No.:</b> HCT-RF-2101-FC053

**FCC ID:** A3LSMA725F

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : A3LSMA725M report.

Model(s): SM-A725F/DS  
 Additional Model(s): SM-A725F  
 EUT Type: Mobile Phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 823.3	1M09G7D	QPSK	0.272	24.35
		1M09W7D	16QAM	0.228	23.57
		1M09W7D	64QAM	0.178	22.50
LTE – Band26 (3)	815.5 – 822.5	2M71G7D	QPSK	0.273	24.36
		2M70W7D	16QAM	0.230	23.62
		2M70W7D	64QAM	0.179	22.54
LTE – Band26 (5)	816.5 – 821.5	4M50G7D	QPSK	0.270	24.32
		4M50W7D	16QAM	0.230	23.62
		4M51W7D	64QAM	0.176	22.46
LTE – Band26 (10)	819.0	8M97G7D	QPSK	0.277	24.42
		8M96W7D	16QAM	0.227	23.56
		8M95W7D	64QAM	0.178	22.51
LTE – Band26 (15)	821.5	13M4G7D	QPSK	0.275	24.39
		13M4W7D	16QAM	0.233	23.68
		13M4W7D	64QAM	0.182	22.59

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.  
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2101-FC053

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2101-FC053	January 15, 2021	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION .....	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE .....	7
3.2 CONDUCTED OUTPUT POWER.....	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS .....	10
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	12
3.7 CHANNEL EDGE.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(RADIATED TEST).....	15
3.10 WORST CASE(CONDUCTED TEST) .....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION .....	20
8. TEST DATA .....	22
8.1 CONDUCTED OUTPUT POWER.....	22
8.2 EFFECTIVE RADIATED POWER.....	27
8.3 RADIATED SPURIOUS EMISSIONS .....	29
8.4 OCCUPIED BANDWIDTH .....	30
8.5 CONDUCTED SPURIOUS EMISSIONS .....	31
8.6 CHANNEL EDGE.....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	32
8.8 STADDLE CHANNEL .....	37
8.8.1 CONDUCTED OUTPUT POWER.....	37
8.8.2 EFFECTIVE RADIATED POWER .....	41
8.8.3 RADIATED SPURIOUS EMISSIONS .....	42
8.8.4 CONDUCTED SPURIOUS EMISSIONS .....	43
8.8.5 CHANNEL EDGE(Part90) .....	43
8.8.6 BAND EDGE(Part22) .....	43
9. TEST PLOTS.....	44
10. TEST PLOTS (STRADDLE CHANNEL).....	88
11 ANNEX A_ TEST SETUP PHOTO .....	113

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMA725F
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§90, §22, §2
<b>EUT Type:</b>	Mobile Phone
<b>Model(s):</b>	SM-A725F/DS
<b>Additional Model(s):</b>	SM-A725F
<b>Tx Frequency:</b>	814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
<b>Date(s) of Tests:</b>	December 02, 2020 ~ January 4, 2021
<b>Serial number:</b>	R38NA01FPGE

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 CONDUCTED OUTPUT POWER

#### Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

#### Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

#### Test setup

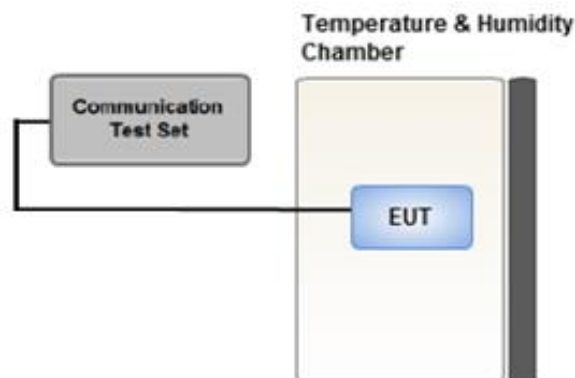



### 3.3 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.4 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.5 OCCUPIED BANDWIDTH.

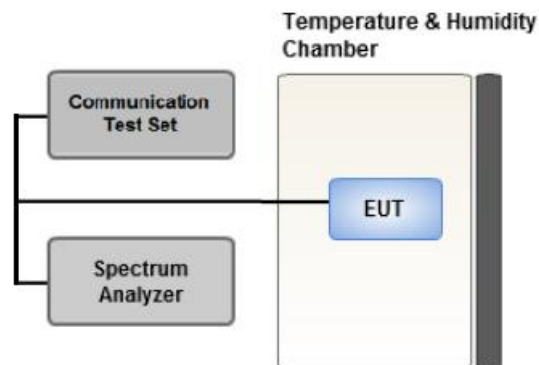

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

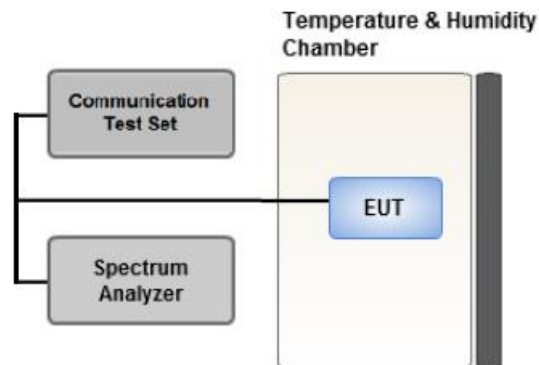

**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

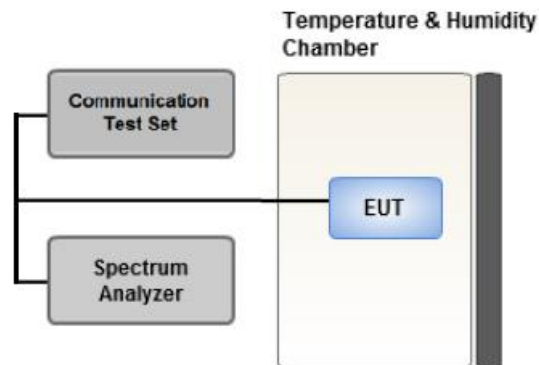

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
  - .- EA licensee's frequency block by up to and including 37.5 kHz : 300Hz
  - .- EA licensee's frequency block greater than 37.5 kHz : 100kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

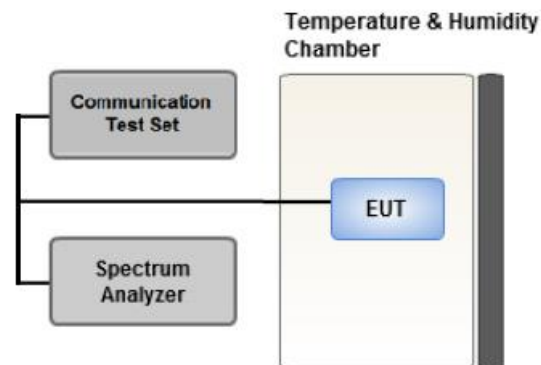

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
(In the case of radiated spurious emissions, only the B.W result that confirmed the maximum radiated power was reported.)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.
- SM-A725F/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-A725F/DS)

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

**3.10 WORST CASE(CONDUCTED TEST)**

-Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

- SM-A725F/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A725F/DS)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Staddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		1.4, 3, 5 10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0



#### 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

Note:

1. The same samples were used for SAR and EMC

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7MHz		823.3MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	24.22	0.264	24.16	0.261	100
		1	3	24.35	0.272	24.25	0.266	100
		1	5	24.23	0.265	24.10	0.257	100
		3	0	24.26	0.267	24.13	0.259	100
		3	1	24.32	0.270	24.22	0.264	100
		3	3	24.25	0.266	24.13	0.259	100
		6	0	23.32	0.215	23.22	0.210	100
	16QAM	1	0	23.50	0.224	23.34	0.216	100
		1	3	23.57	0.228	23.41	0.219	100
		1	5	23.36	0.217	23.36	0.217	100
		3	0	23.29	0.213	23.19	0.208	100
		3	1	23.37	0.217	23.30	0.214	100
		3	3	23.28	0.213	23.12	0.205	100
		6	0	22.44	0.175	22.32	0.171	100
	64QAM	1	0	22.42	0.175	22.31	0.170	100
		1	3	22.42	0.175	22.35	0.172	100
		1	5	22.38	0.173	22.29	0.169	100
		3	0	22.44	0.175	22.34	0.171	100
		3	1	22.50	0.178	22.40	0.174	100
		3	3	22.36	0.172	22.28	0.169	100
		6	0	21.37	0.137	21.30	0.135	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5MHz		822.5MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	24.19	0.262	24.11	0.258	100
		1	7	24.36	0.273	24.22	0.264	100
		1	14	24.34	0.272	24.19	0.262	100
		8	0	23.32	0.215	23.23	0.210	100
		8	3	23.41	0.219	23.31	0.214	100
		8	7	23.33	0.215	23.22	0.210	100
		15	0	23.38	0.218	23.30	0.214	100
	16QAM	1	0	23.54	0.226	23.41	0.219	100
		1	7	23.62	0.230	23.56	0.227	100
		1	14	23.52	0.225	23.41	0.219	100
		8	0	22.40	0.174	22.30	0.170	100
		8	3	22.41	0.174	22.32	0.171	100
		8	7	22.36	0.172	22.30	0.170	100
		15	0	22.37	0.173	22.30	0.170	100
	64QAM	1	0	22.41	0.174	22.38	0.173	100
		1	7	22.54	0.179	22.45	0.176	100
		1	14	22.42	0.175	22.32	0.171	100
		8	0	21.42	0.139	21.35	0.136	100
		8	3	21.39	0.138	21.34	0.136	100
		8	7	21.37	0.137	21.31	0.135	100
		15	0	21.44	0.139	21.34	0.136	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5MHz		821.5MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	24.32	0.270	24.22	0.264	100
		1	12	24.29	0.269	24.23	0.265	100
		1	24	24.24	0.265	24.15	0.260	100
		12	0	23.38	0.218	23.28	0.213	100
		12	6	23.41	0.219	23.31	0.214	100
		12	11	23.37	0.217	23.29	0.213	100
		25	0	23.29	0.213	23.26	0.212	100
	16QAM	1	0	23.62	0.230	23.48	0.223	100
		1	12	23.53	0.225	23.40	0.219	100
		1	24	23.44	0.221	23.33	0.215	100
		12	0	22.37	0.173	22.33	0.171	100
		12	6	22.39	0.173	22.29	0.169	100
		12	11	22.40	0.174	22.29	0.169	100
		25	0	22.30	0.170	22.25	0.168	100
	64QAM	1	0	22.46	0.176	22.39	0.173	100
		1	12	22.40	0.174	22.35	0.172	100
		1	24	22.29	0.169	22.25	0.168	100
		12	0	21.38	0.137	21.33	0.136	100
		12	6	21.42	0.139	21.36	0.137	100
		12	11	21.43	0.139	21.32	0.136	100
		25	0	21.29	0.135	21.25	0.133	100



Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819MHz		
				dBm	W	
10	QPSK	1	0	24.42	0.277	100
		1	24	24.22	0.264	100
		1	49	24.13	0.259	100
		25	0	23.28	0.213	100
		25	12	23.29	0.213	100
		25	24	23.22	0.210	100
		50	0	23.31	0.214	100
	16QAM	1	0	23.56	0.227	100
		1	24	23.42	0.220	100
		1	49	23.44	0.221	100
		25	0	22.30	0.170	100
		25	12	22.33	0.171	100
		25	24	22.22	0.167	100
		50	0	22.35	0.172	100
	64QAM	1	0	22.49	0.177	100
		1	24	22.51	0.178	100
		1	49	22.40	0.174	100
		25	0	21.30	0.135	100
		25	12	21.36	0.137	100
		25	24	21.23	0.133	100
		50	0	21.28	0.134	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5MHz		
				dBm	W	
15	QPSK	1	0	24.39	0.275	100
		1	36	24.36	0.273	100
		1	74	24.06	0.255	100
		36	0	23.39	0.218	100
		36	18	23.38	0.218	100
		36	39	23.33	0.215	100
		75	0	23.35	0.216	100
	16QAM	1	0	23.68	0.233	100
		1	36	23.44	0.221	100
		1	74	23.39	0.218	100
		36	0	22.44	0.175	100
		36	18	22.49	0.177	100
		36	39	22.38	0.173	100
		75	0	22.39	0.173	100
	64QAM	1	0	22.59	0.182	100
		1	36	22.47	0.177	100
		1	74	22.25	0.168	100
		36	0	21.44	0.139	100
		36	18	21.48	0.141	100
		36	39	21.41	0.138	100
		75	0	21.41	0.138	100

**8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
814.7	LTE B26/ 1.4 MHz	QPSK	-33.00	30.11	-10.29	1.39	H	< 100	0.070	18.43
		16QAM	-33.81	29.30	-10.29	1.39	H		0.058	17.62
		64QAM	-34.82	28.29	-10.29	1.39	H		0.046	16.61
823.3		QPSK	-33.31	30.10	-10.25	1.39	H		0.070	18.46
		16QAM	-34.14	29.27	-10.25	1.39	H		0.058	17.63
		64QAM	-35.16	28.25	-10.25	1.39	H		0.046	16.61

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
815.5	LTE B26/ 3 MHz	QPSK	-32.98	30.12	-10.29	1.39	H	< 100	0.070	18.45
		16QAM	-33.77	29.33	-10.29	1.39	H		0.058	17.66
		64QAM	-34.77	28.33	-10.29	1.39	H		0.046	16.66
822.5		QPSK	-33.20	30.15	-10.26	1.39	H		0.071	18.50
		16QAM	-34.05	29.30	-10.26	1.39	H		0.058	17.65
		64QAM	-35.04	28.31	-10.26	1.39	H		0.046	16.66

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
816.5	LTE B26/ 5 MHz	QPSK	-33.00	30.11	-10.28	1.39	H	< 100	0.070	18.44
		16QAM	-33.81	29.30	-10.28	1.39	H		0.058	17.63
		64QAM	-34.82	28.29	-10.28	1.39	H		0.046	16.62
821.5		QPSK	-33.12	30.18	-10.26	1.39	H		0.071	18.53
		16QAM	-33.95	29.35	-10.26	1.39	H		0.059	17.70
		64QAM	-34.97	28.33	-10.26	1.39	H		0.047	16.68

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
819.0	LTE B26/ 10 MHz	QPSK	-33.01	30.18	-10.27	1.39	H	< 100	0.071	18.52
		16QAM	-33.79	29.40	-10.27	1.39	H		0.059	17.74
		64QAM	-34.83	28.36	-10.27	1.39	H		0.047	16.70

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
821.5	LTE B26/ 15 MHz	QPSK	-33.04	30.26	-10.26	1.39	H	< 7.00	0.073	18.61
		16QAM	-33.82	29.48	-10.26	1.39	H		0.061	17.83
		64QAM	-34.83	28.47	-10.26	1.39	H		0.048	16.82

**Note**

1. Limit: None (for reporting purposes only)

**8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26765 (821.5)	1643.00	-49.03	9.45	-58.78	1.98	H	-51.31	-13.00
	2464.50	-54.79	10.58	-58.93	2.46	H	-50.81	-13.00
	3286.00	-56.04	12.15	-57.18	2.88	H	-47.91	-13.00

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0934
			16QAM			1.0900
			64QAM			1.0936
	3 MHz	822.5	QPSK	15		2.7093
			16QAM			2.7012
			64QAM			2.7008
	5 MHz	821.5	QPSK	25		4.5008
			16QAM			4.4951
			64QAM			4.5049
	10 MHz	819.0	QPSK	50		8.9665
			16QAM			8.9547
			64QAM			8.9502
	15 MHz	821.5	QPSK	75		13.399
			16QAM			13.427
			64QAM			13.372

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 59.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.7174	27.976	-67.531	-39.555	-13.00
		823.3	3.7124	27.976	-67.020	-39.044	
	3	815.5	3.6576	27.976	-67.313	-39.337	
		822.5	3.7049	27.976	-67.009	-39.033	
	5	816.5	3.7015	27.976	-67.321	-39.345	
		821.5	3.7024	27.976	-67.427	-39.451	
	10	819.0	3.7134	27.976	-67.468	-39.492	
	15	821.5	3.7299	27.976	-67.408	-39.432	

Note:

1. Plots of the EUT’s Conducted Spurious Emissions are shown Page 80 ~ 87.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


**8.6 CHANNEL EDGE**

- Plots of the EUT’s Band Edge are shown Page 60 ~ 79.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	814 699 991	0.0	0.000 000	0.000
100%		-30	814 699 987	-4.1	-0.000 001	-0.005
100%		-20	814 699 988	-3.3	0.000 000	-0.004
100%		-10	814 699 987	-3.9	0.000 000	-0.005
100%		0	814 699 995	4.0	0.000 000	0.005
100%		+10	814 699 988	-3.4	0.000 000	-0.004
100%		+30	814 699 986	-5.0	-0.000 001	-0.006
100%		+40	814 699 983	-7.5	-0.000 001	-0.009
100%		+50	814 699 982	-8.9	-0.000 001	-0.011
Batt. Endpoint		3.400	+20	814 699 995	4.1	0.000 001

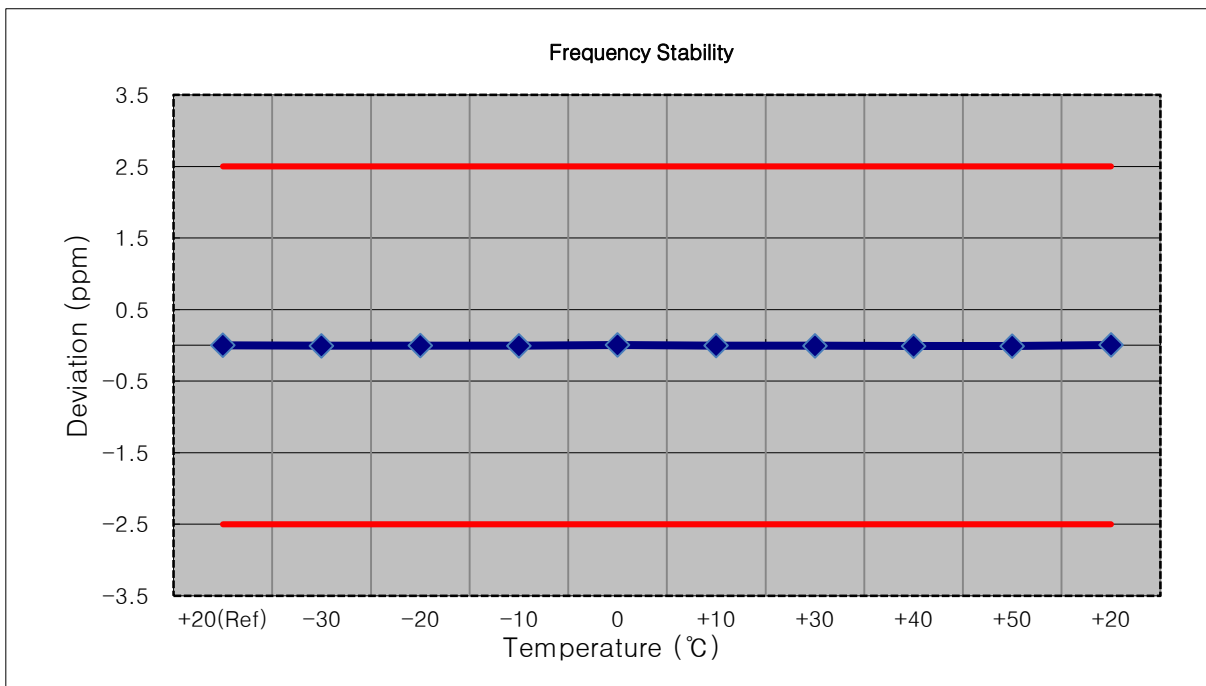




- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	815 500 014	0.0	0.000 000	0.000
100%		-30	815 500 025	10.3	0.000 001	0.013
100%		-20	815 500 026	11.8	0.000 001	0.014
100%		-10	815 500 023	8.8	0.000 001	0.011
100%		0	815 500 029	14.4	0.000 002	0.018
100%		+10	815 500 027	12.6	0.000 002	0.015
100%		+30	815 500 025	10.9	0.000 001	0.013
100%		+40	815 500 026	11.3	0.000 001	0.014
100%		+50	815 500 027	12.7	0.000 002	0.016
Batt. Endpoint		3.400	+20	815 500 008	-6.0	-0.000 001

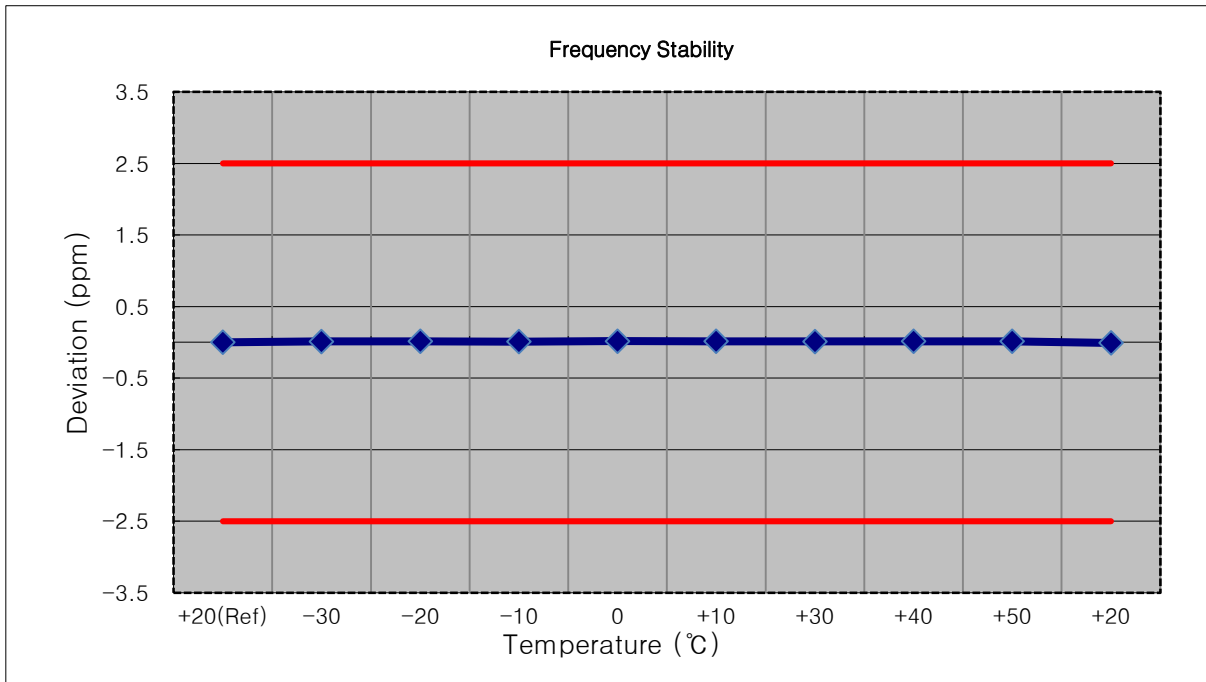


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	816 500 004	0.0	0.000 000	0.000
100%		-30	816 500 010	5.5	0.000 001	0.007
100%		-20	816 500 011	6.7	0.000 001	0.008
100%		-10	816 500 007	2.2	0.000 000	0.003
100%		0	816 500 000	-4.0	0.000 000	-0.005
100%		+10	816 500 007	2.6	0.000 000	0.003
100%		+30	816 500 009	4.6	0.000 001	0.006
100%		+40	816 500 011	6.9	0.000 001	0.008
100%		+50	816 500 012	8.0	0.000 001	0.010
Batt. Endpoint		3.400	+20	816 499 998	-6.1	-0.000 001

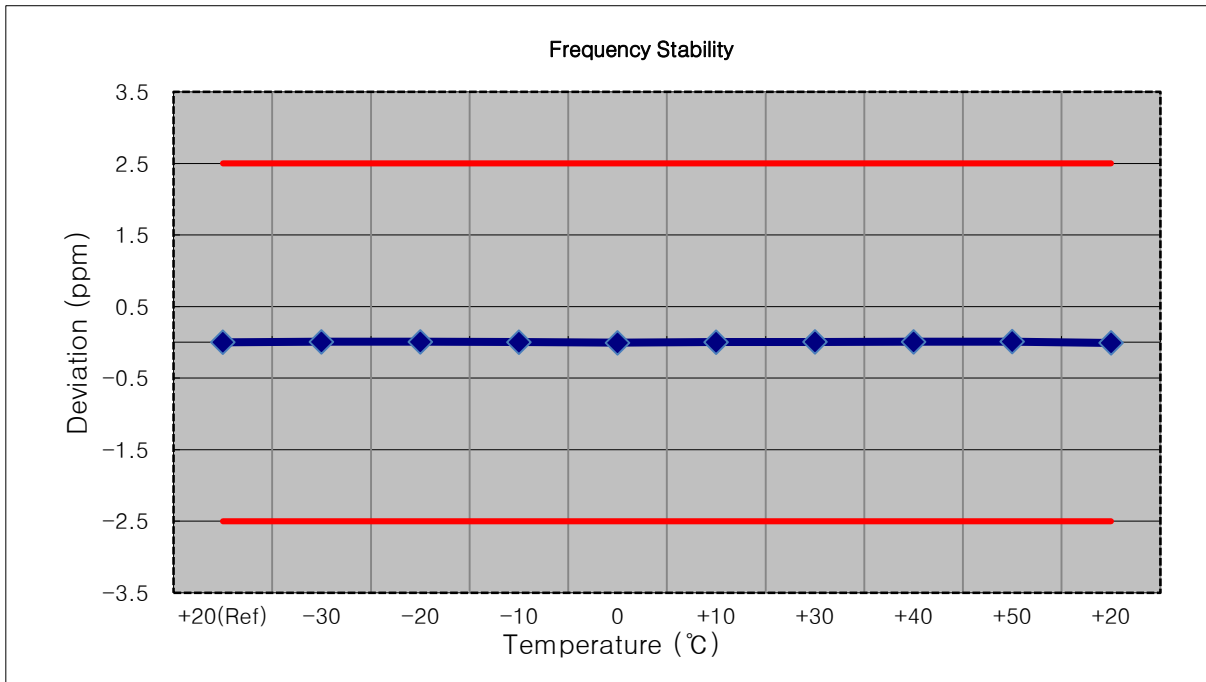


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819.000.000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	819 000 010	0.0	0.000 000	0.000
100%		-30	819 000 016	6.0	0.000 001	0.007
100%		-20	819 000 020	9.4	0.000 001	0.011
100%		-10	819 000 017	7.1	0.000 001	0.009
100%		0	819 000 014	4.1	0.000 001	0.005
100%		+10	819 000 019	8.9	0.000 001	0.011
100%		+30	819 000 014	3.9	0.000 000	0.005
100%		+40	819 000 021	11.2	0.000 001	0.014
100%		+50	819 000 016	5.8	0.000 001	0.007
Batt. Endpoint		3.400	+20	819 000 020	10.2	0.000 001

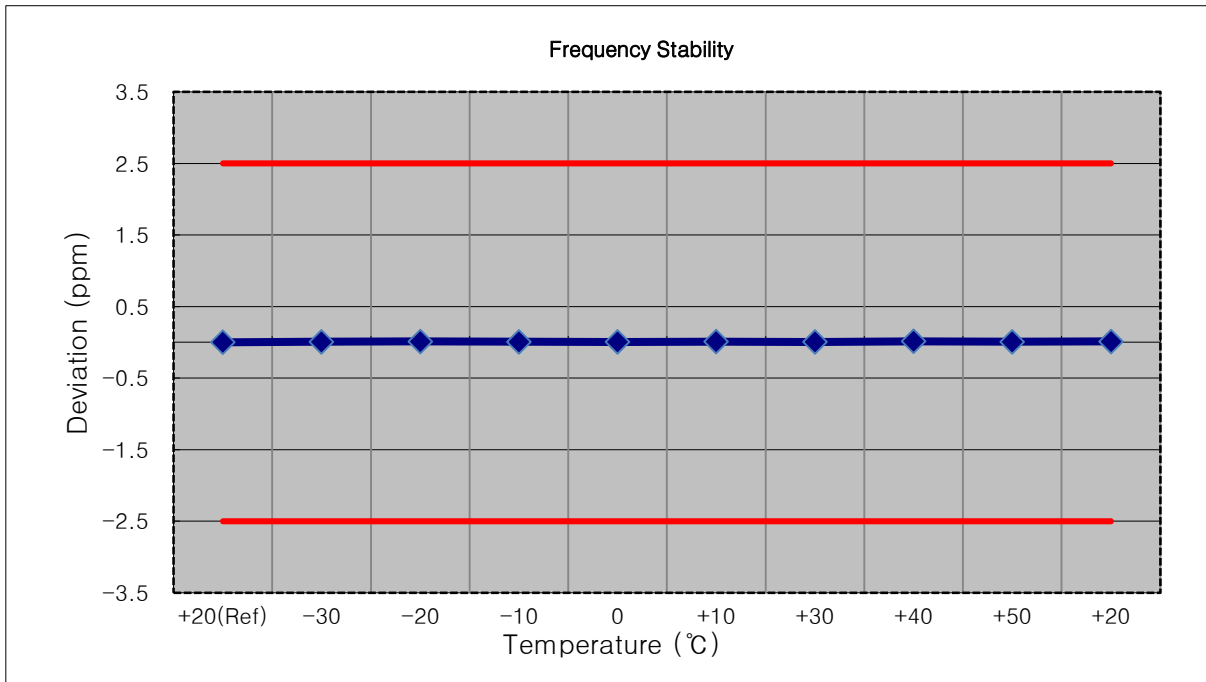

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	821 500 006	0.0	0.000 000	0.000
100%		-30	821 500 013	7.4	0.000 001	0.009
100%		-20	821 500 015	9.4	0.000 001	0.011
100%		-10	821 500 015	9.4	0.000 001	0.011
100%		0	821 500 012	6.3	0.000 001	0.008
100%		+10	821 500 013	7.2	0.000 001	0.009
100%		+30	821 500 013	7.0	0.000 001	0.009
100%		+40	821 500 014	8.2	0.000 001	0.010
100%		+50	821 500 015	9.0	0.000 001	0.011
Batt. Endpoint		3.400	+20	821 500 016	10.5	0.000 001

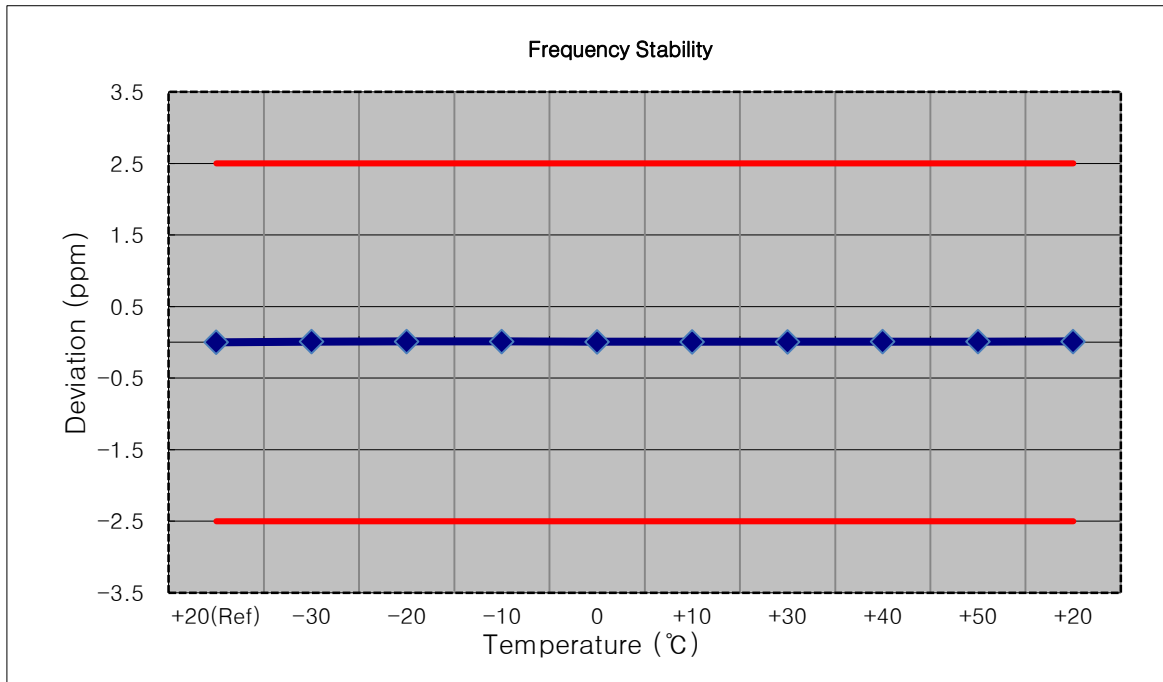

**8.8 STADDLE CHANNEL**

**8.8.1 CONDUCTED OUTPUT POWER**

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
1.4	QPSK	1	0	24.15	0.260	100
		1	24	24.23	0.265	100
		1	49	24.18	0.262	100
		25	0	24.19	0.262	100
		25	12	24.25	0.266	100
		25	24	24.17	0.261	100
		50	0	23.22	0.210	100
	16QAM	1	0	23.40	0.219	100
		1	24	23.41	0.219	100
		1	49	23.30	0.214	100
		25	0	23.20	0.209	100
		25	12	23.29	0.213	100
		25	24	23.18	0.208	100
		50	0	22.32	0.171	100
	64QAM	1	0	22.31	0.170	100
		1	24	22.40	0.174	100
		1	49	22.30	0.170	100
		25	0	22.33	0.171	100
		25	12	22.40	0.174	100
		25	24	22.28	0.169	100
		50	0	21.29	0.135	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
3	QPSK	1	0	24.15	0.260	100
		1	24	24.22	0.264	100
		1	49	24.19	0.262	100
		25	0	23.22	0.210	100
		25	12	23.31	0.214	100
		25	24	23.23	0.210	100
		50	0	23.30	0.214	100
	16QAM	1	0	23.41	0.219	100
		1	24	23.52	0.225	100
		1	49	23.40	0.219	100
		25	0	22.30	0.170	100
		25	12	22.34	0.171	100
		25	24	22.31	0.170	100
		50	0	22.29	0.169	100
	64QAM	1	0	22.38	0.173	100
		1	24	22.41	0.174	100
		1	49	22.30	0.170	100
		25	0	21.32	0.136	100
		25	12	21.34	0.136	100
		25	24	21.31	0.135	100
		50	0	21.34	0.136	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
5	QPSK	1	0	24.20	0.263	100
		1	24	24.23	0.265	100
		1	49	24.15	0.260	100
		25	0	23.22	0.210	100
		25	12	23.31	0.214	100
		25	24	23.29	0.213	100
		50	0	23.25	0.211	100
	16QAM	1	0	23.48	0.223	100
		1	24	23.41	0.219	100
		1	49	23.33	0.215	100
		25	0	22.31	0.170	100
		25	12	22.25	0.168	100
		25	24	22.29	0.169	100
		50	0	22.25	0.168	100
	64QAM	1	0	22.31	0.170	100
		1	24	22.35	0.172	100
		1	49	22.27	0.169	100
		25	0	21.29	0.135	100
		25	12	21.36	0.137	100
		25	24	21.33	0.136	100
		50	0	21.24	0.133	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
10	QPSK	1	0	24.31	0.270	100
		1	24	24.17	0.261	100
		1	49	24.08	0.256	100
		25	0	23.28	0.213	100
		25	12	23.27	0.212	100
		25	24	23.21	0.209	100
		50	0	23.22	0.210	100
	16QAM	1	0	23.52	0.225	100
		1	24	23.37	0.217	100
		1	49	23.31	0.214	100
		25	0	22.27	0.169	100
		25	12	22.30	0.170	100
		25	24	22.21	0.166	100
		50	0	22.29	0.169	100
	64QAM	1	0	22.43	0.175	100
		1	24	22.31	0.170	100
		1	49	22.28	0.169	100
		25	0	21.29	0.135	100
		25	12	21.32	0.136	100
		25	24	21.24	0.133	100
		50	0	21.26	0.134	100



**8.8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 1.4 MHz	QPSK	-33.32	30.08	-10.25	1.39	H	< 7.00	0.070	18.44
		16QAM	-34.14	29.26	-10.25	1.39	H		0.058	17.62
		64QAM	-35.14	28.26	-10.25	1.39	H		0.046	16.62

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 3 MHz	QPSK	-33.26	30.14	-10.25	1.39	H	< 7.00	0.071	18.50
		16QAM	-34.10	29.30	-10.25	1.39	H		0.058	17.66
		64QAM	-35.09	28.31	-10.25	1.39	H		0.046	16.67

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 5 MHz	QPSK	-33.27	30.13	-10.25	1.39	H	< 7.00	0.071	18.49
		16QAM	-34.11	29.29	-10.25	1.39	H		0.058	17.65
		64QAM	-35.11	28.29	-10.25	1.39	H		0.046	16.65

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 10 MHz	QPSK	-33.24	30.16	-10.25	1.39	H	< 7.00	0.071	18.52
		16QAM	-34.06	29.34	-10.25	1.39	H		0.059	17.70
		64QAM	-35.09	28.31	-10.25	1.39	H		0.046	16.67

**8.8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26790 (824.0)	1 648.00	-49.11	9.50	-58.72	1.99	H	-51.21	-13.00
	2 472.00	-56.84	10.60	-60.97	2.47	H	-52.84	-13.00
	3 296.00	-58.07	12.25	-59.15	2.89	H	-49.79	-13.00

**8.8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.7089	27.976	-66.886	-38.910	-13.00
	3		3.6920	27.976	-67.383	-39.407	
	5		3.7039	27.976	-67.232	-39.256	
	10		3.7249	27.976	-67.205	-39.229	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 89 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

**8.8.5 CHANNEL EDGE(Part90)**

- Test Channel : 26790(824.0MHz)

Plots of the EUT's Band Edge are shown Page 93 ~ 104.


**8.8.6 BAND EDGE(Part22)**

- Test Channel : 26790(824.0MHz)


- Plots of the EUT's Band Edge are shown Page 105 ~ 112.

## 9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 QPSK RB 6\_0)

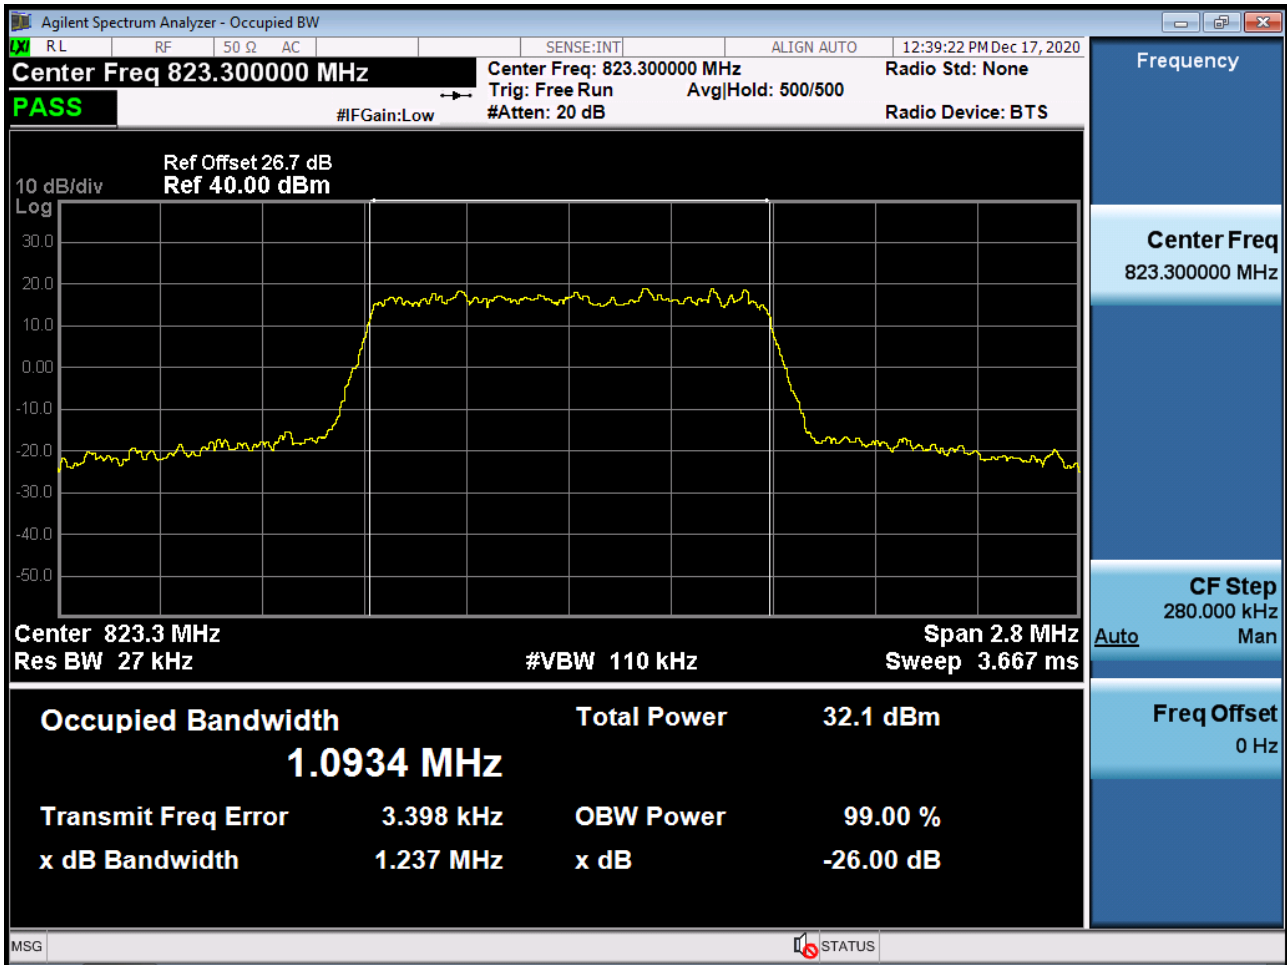


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 16QAM RB 6\_0)

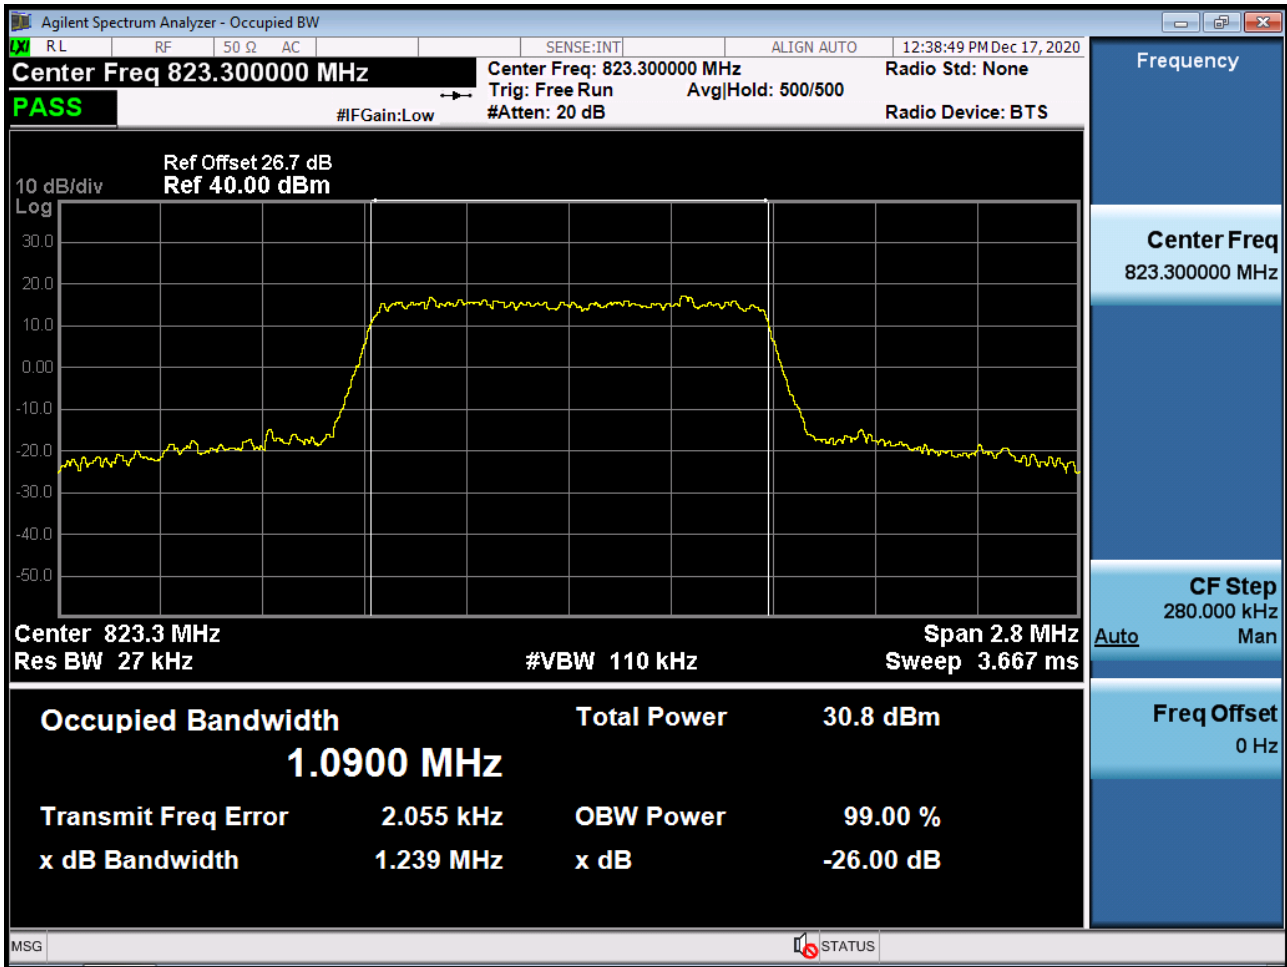

BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 64QAM RB 6\_0)

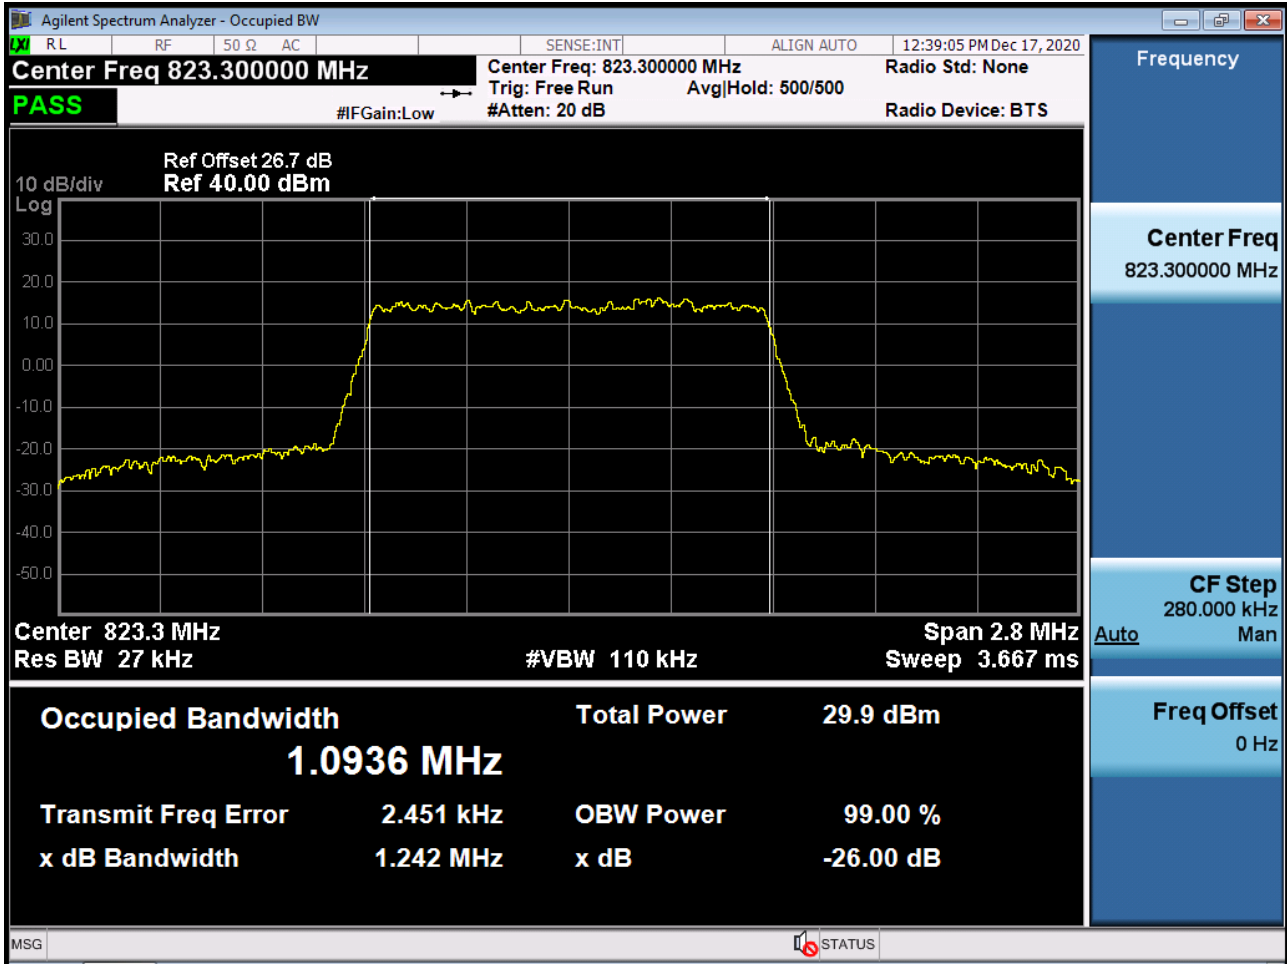


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 QPSK RB 15\_0)

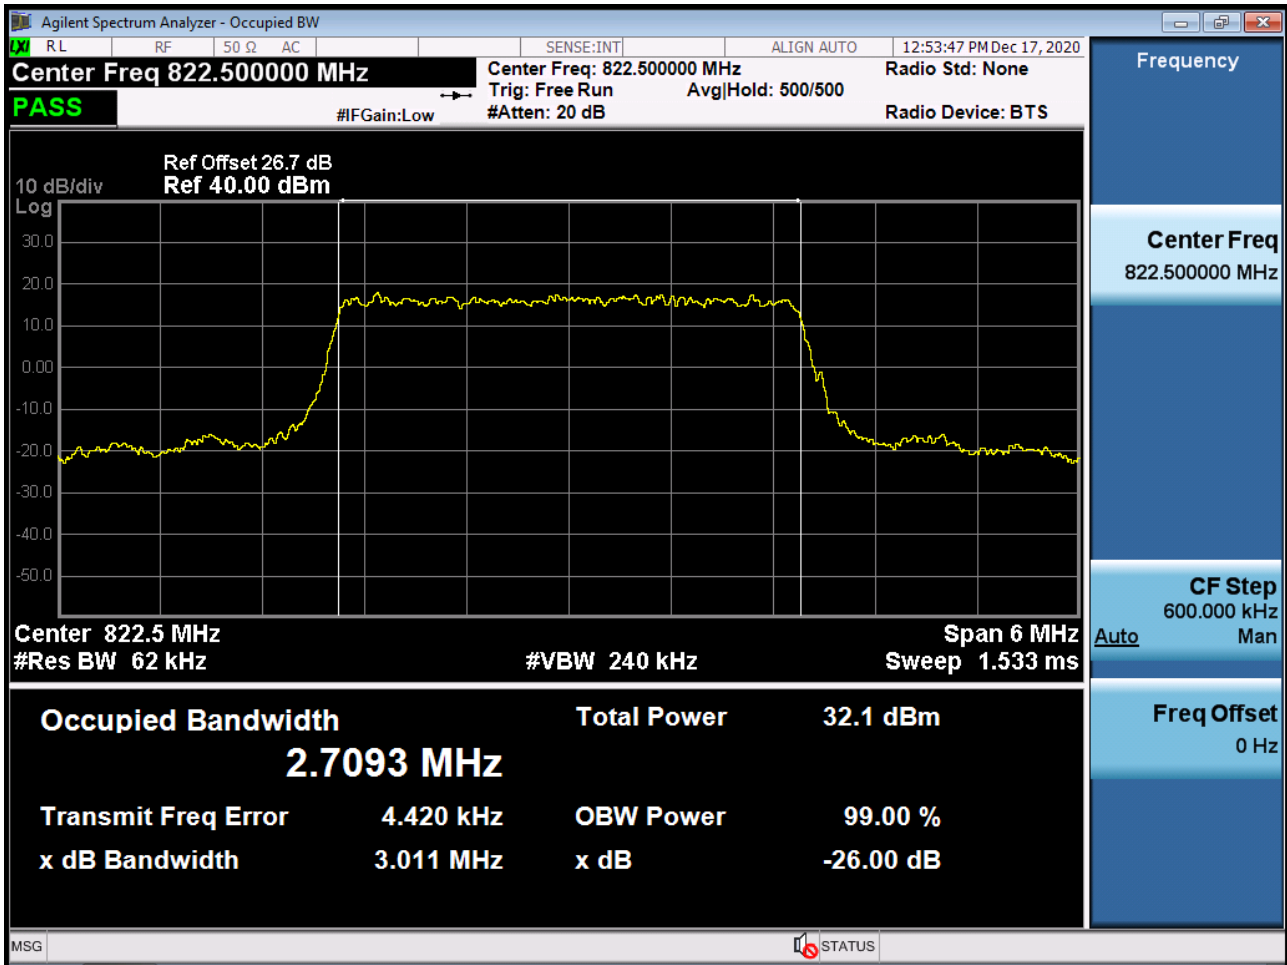





BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 16QAM RB 15\_0)

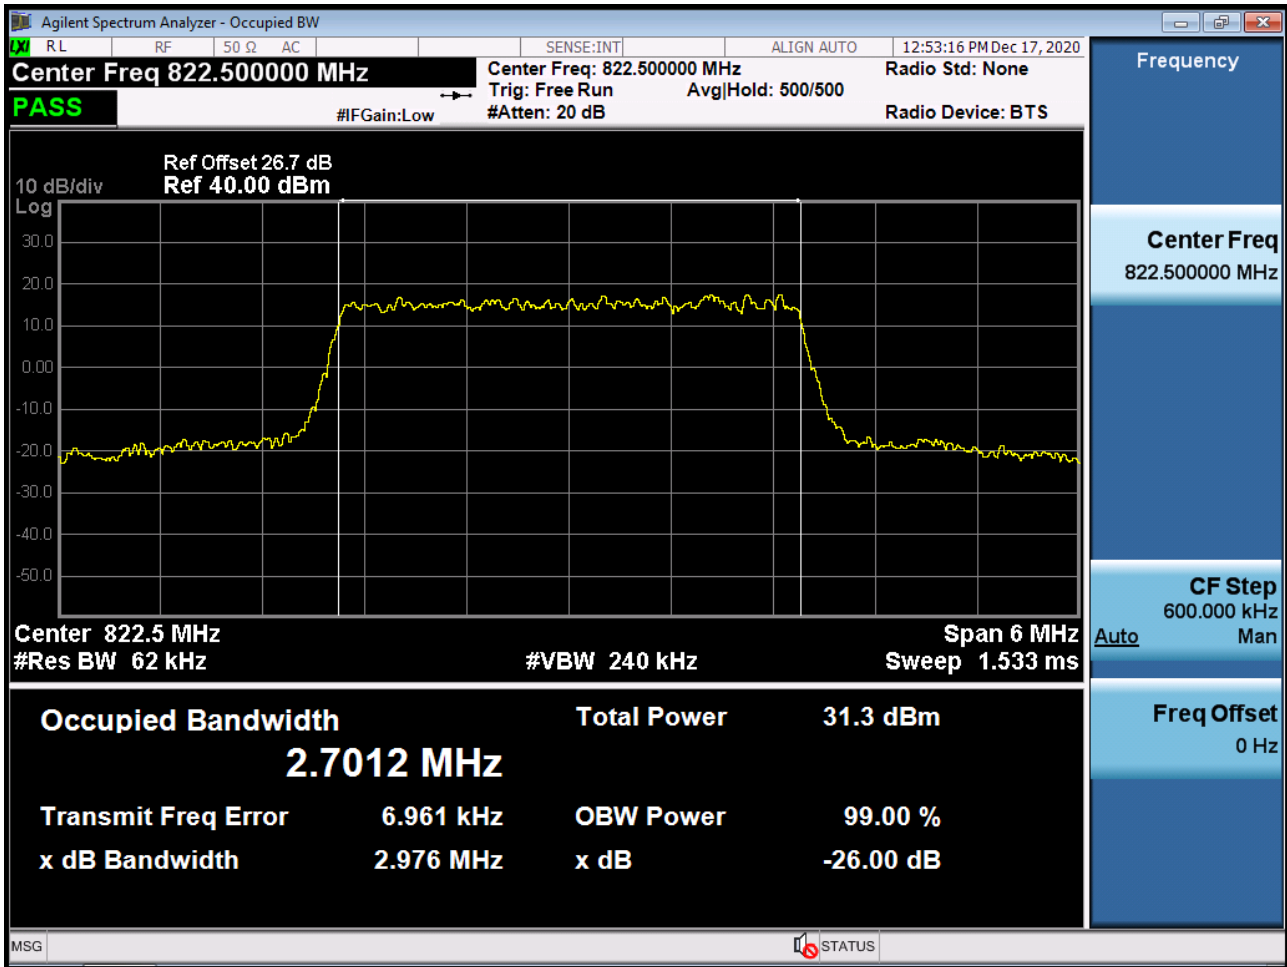


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 64QAM RB 15\_0)

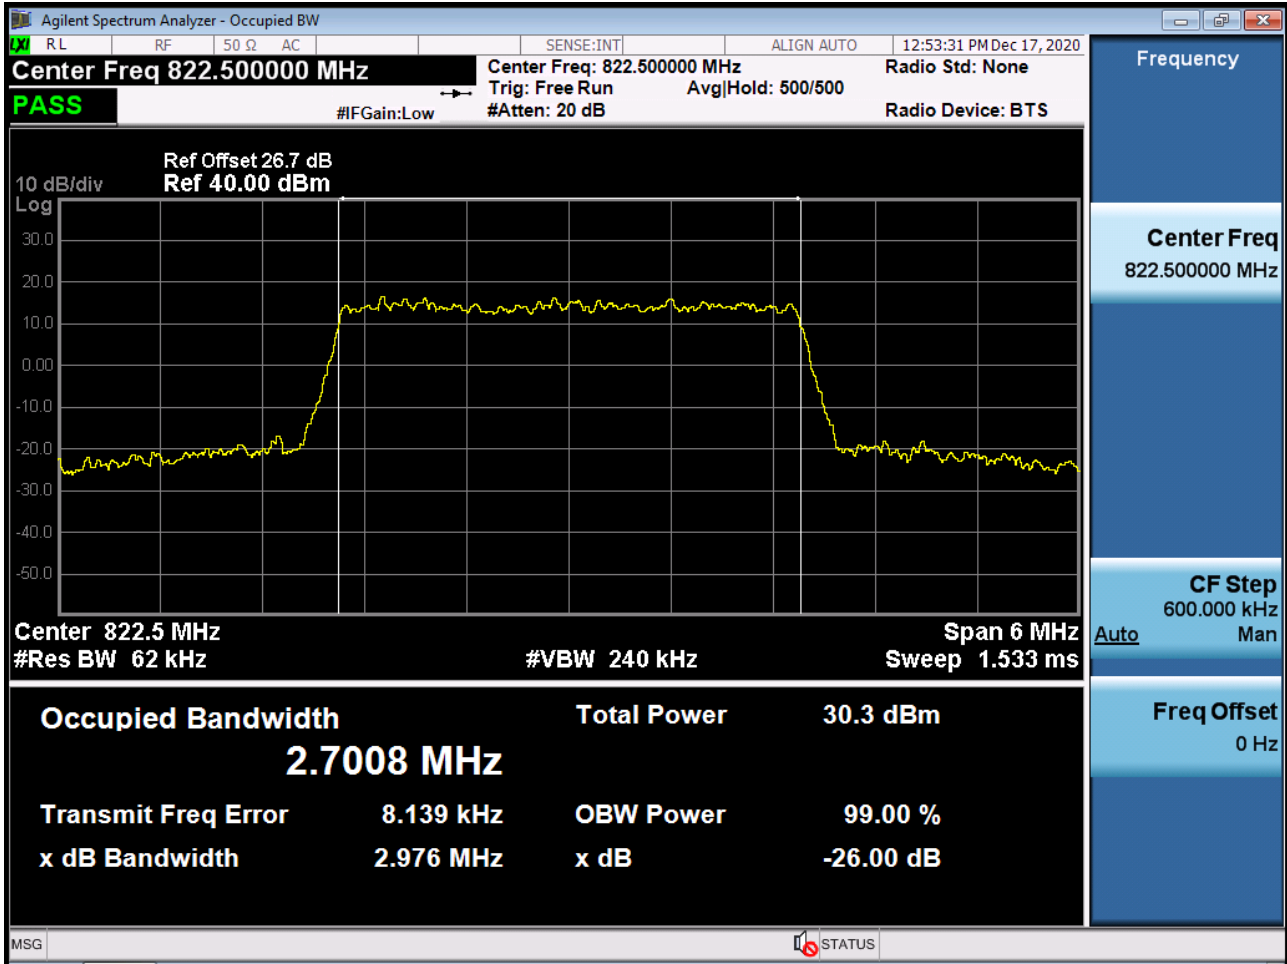


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 QPSK RB 25\_0)

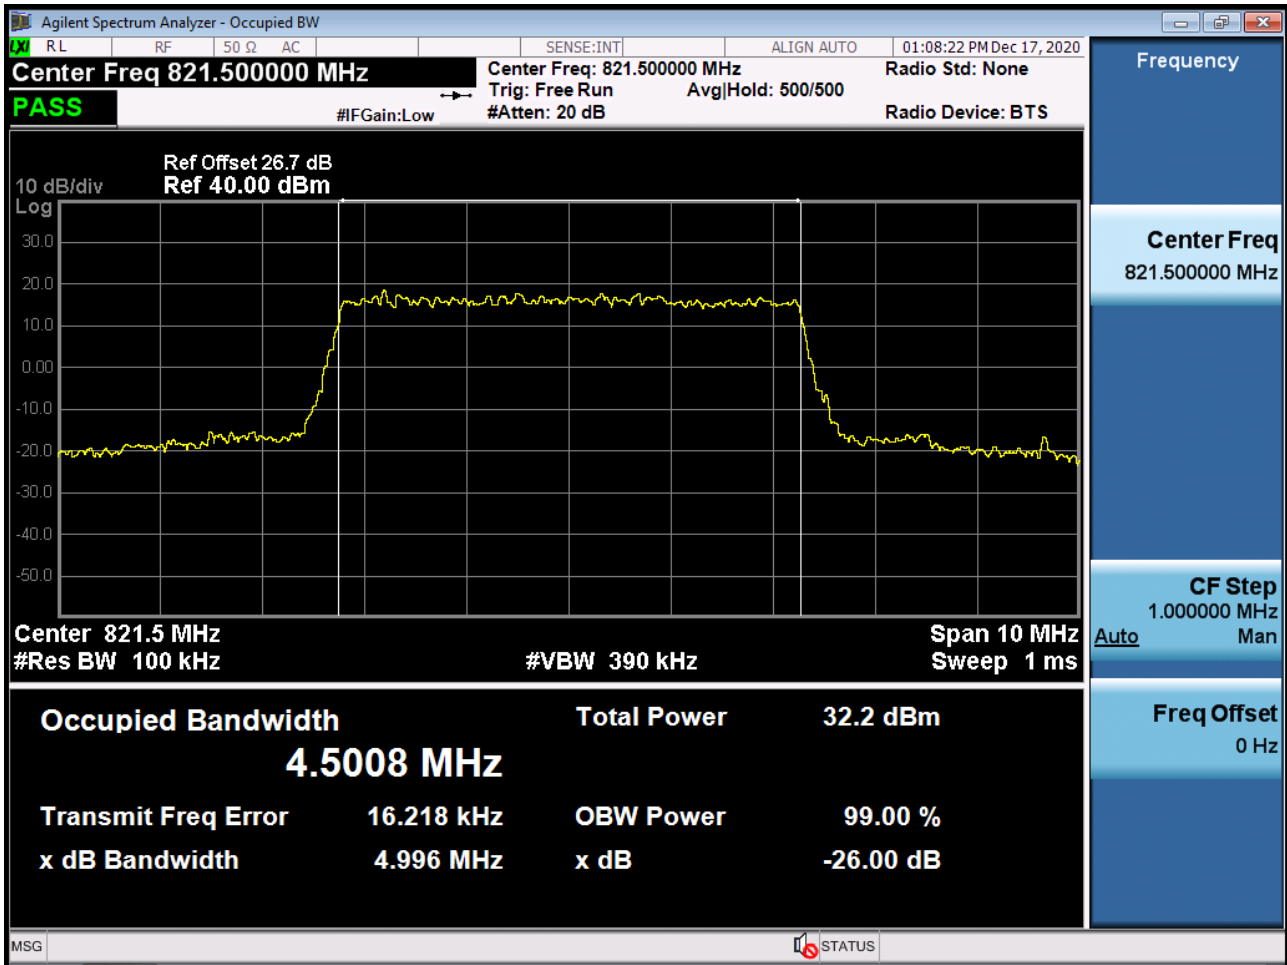


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 16QAM RB 25\_0)

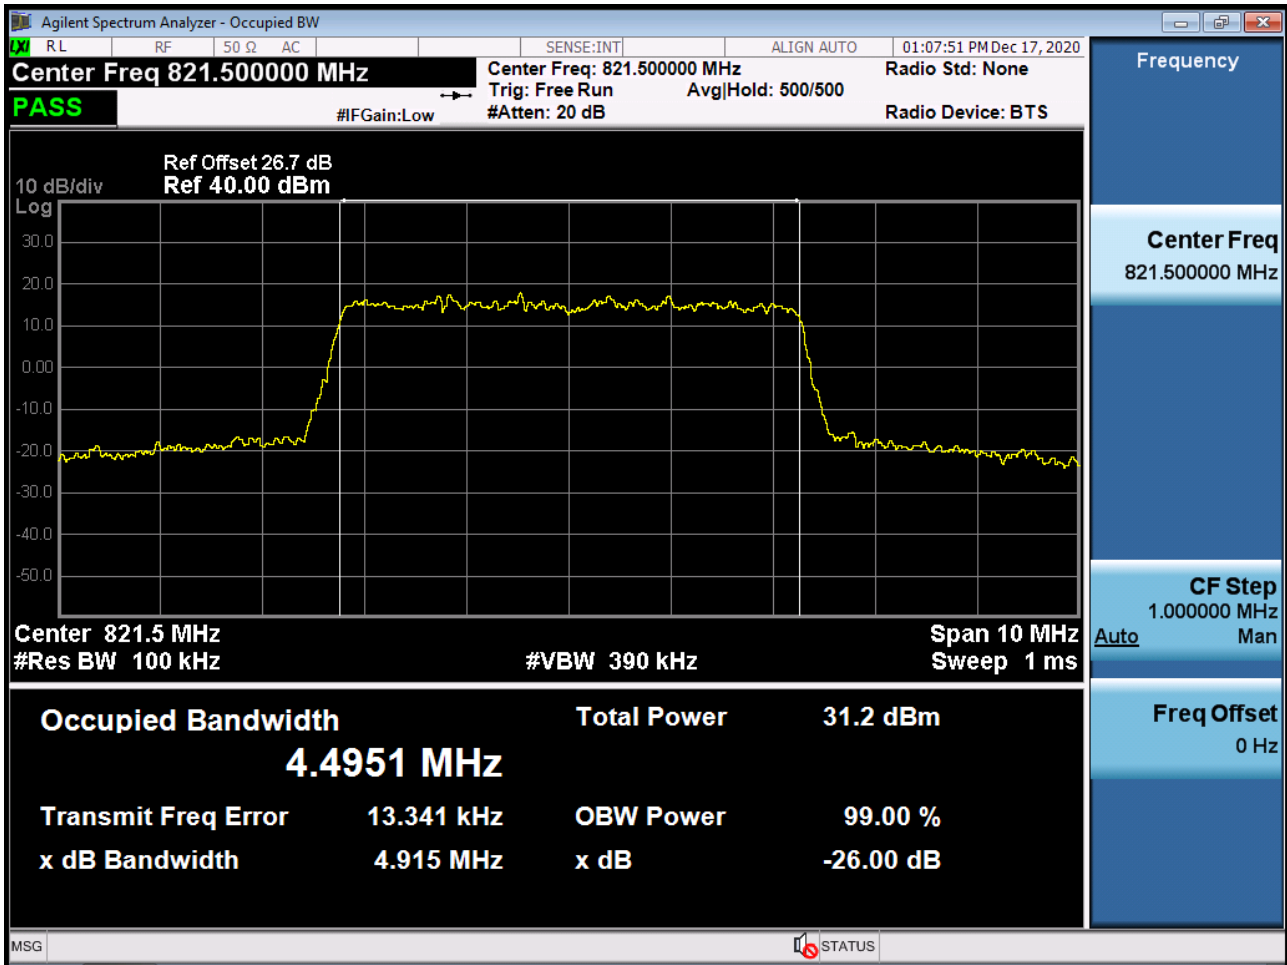


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 64QAM RB 25\_0)

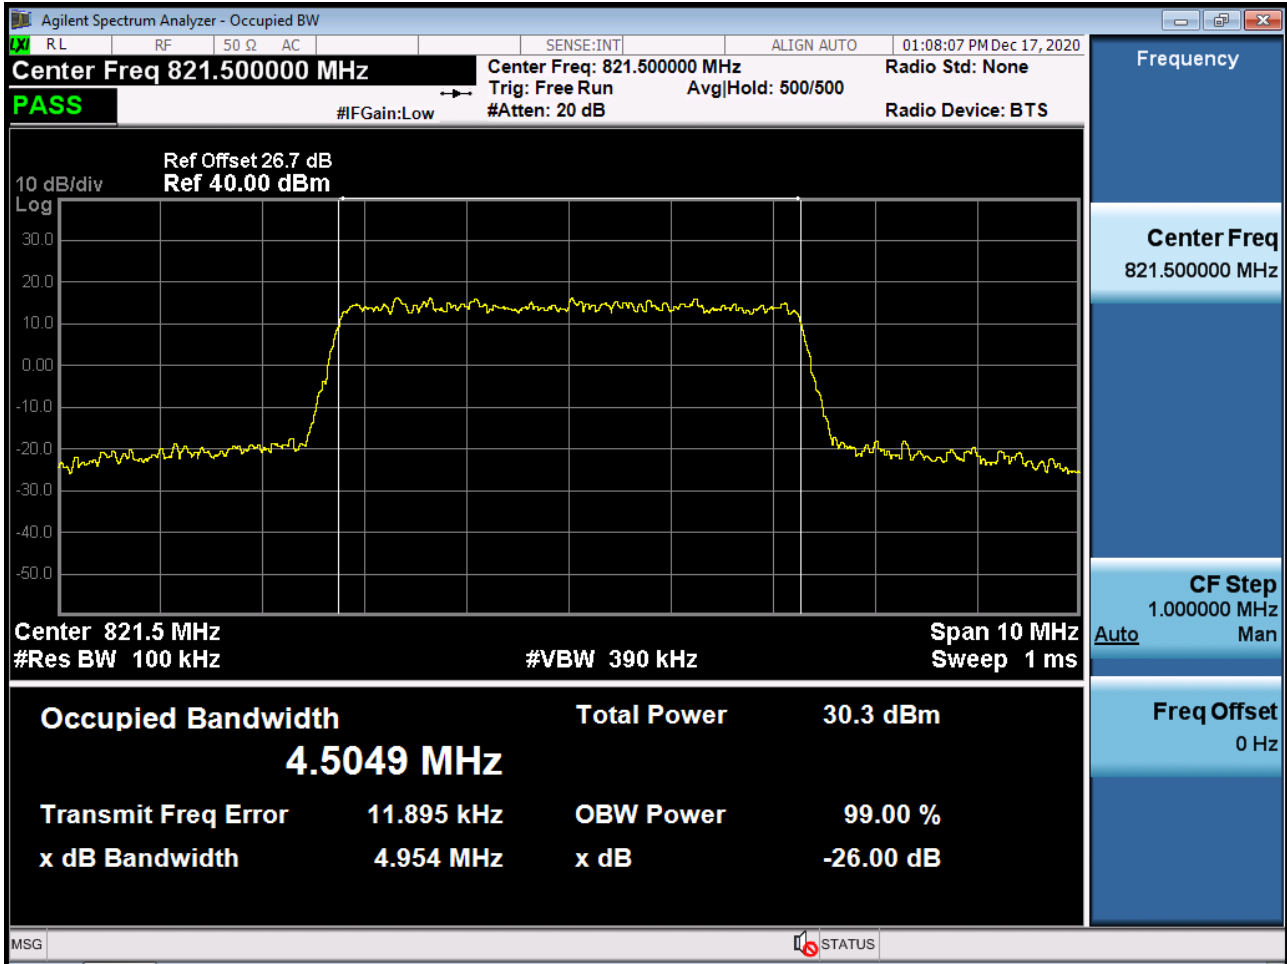


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 QPSK RB 50\_0)

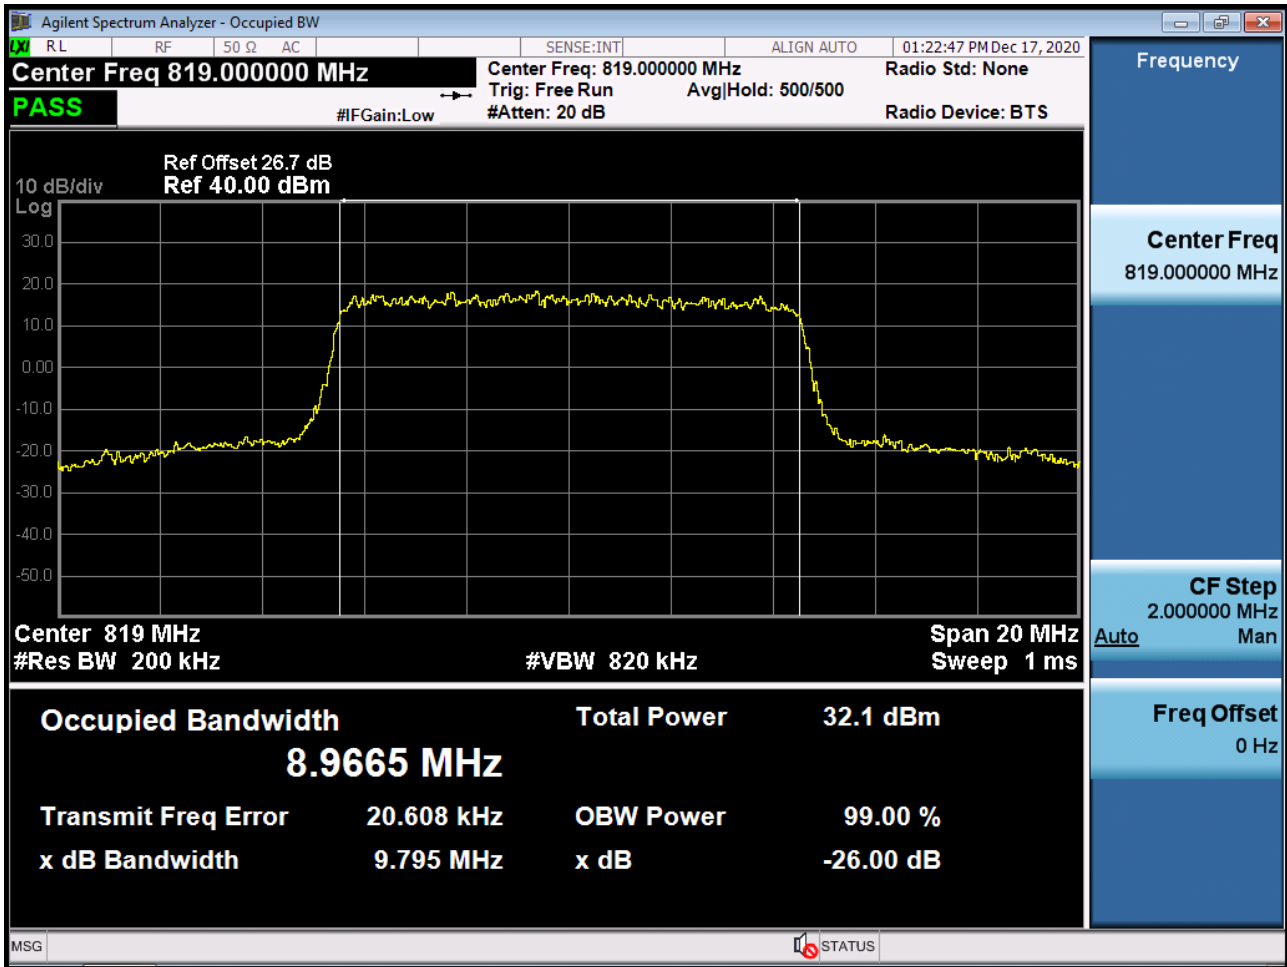

BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 16QAM RB 50\_0)

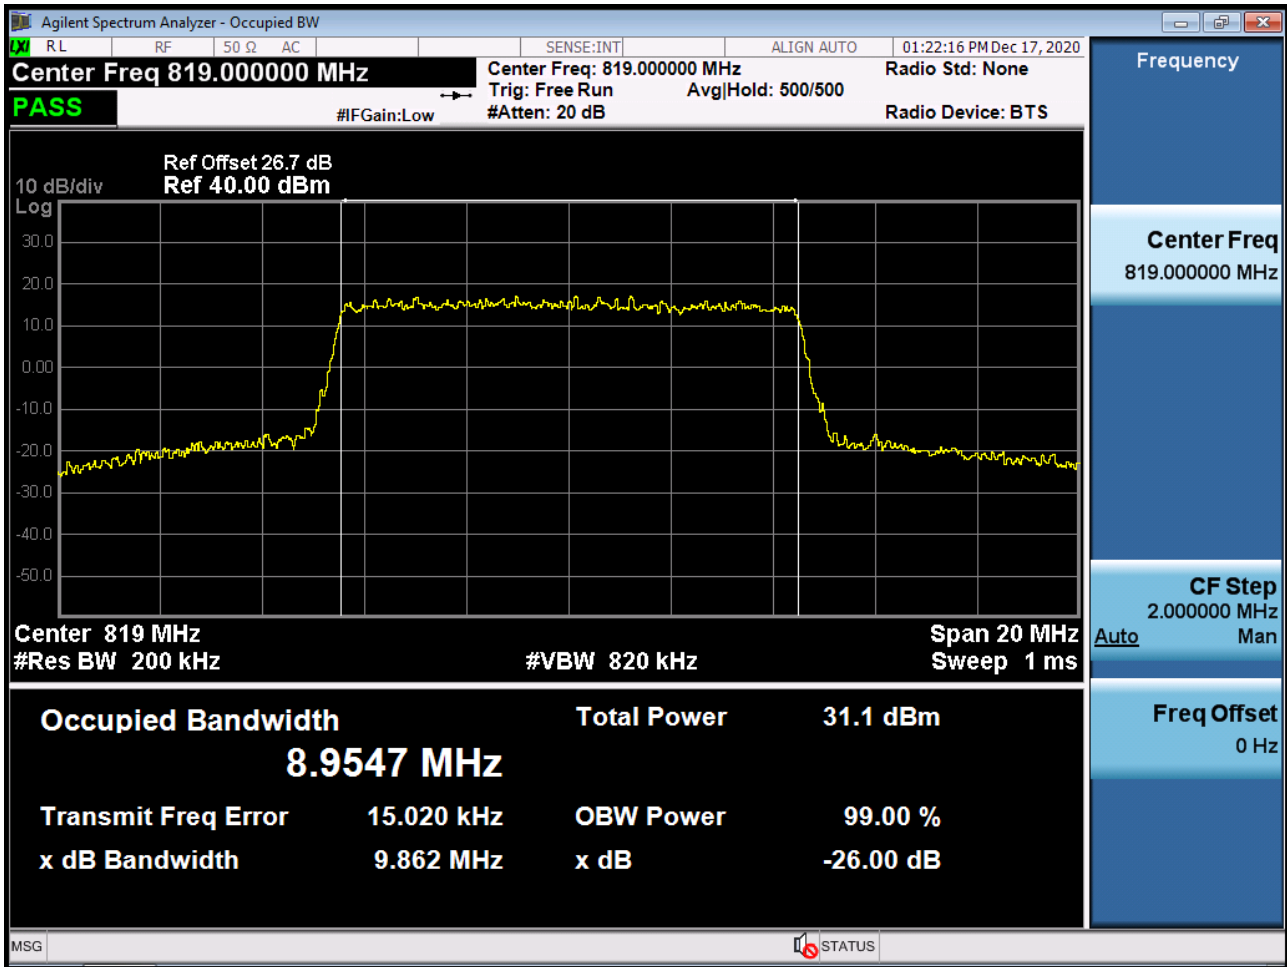


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 64QAM RB 50\_0)

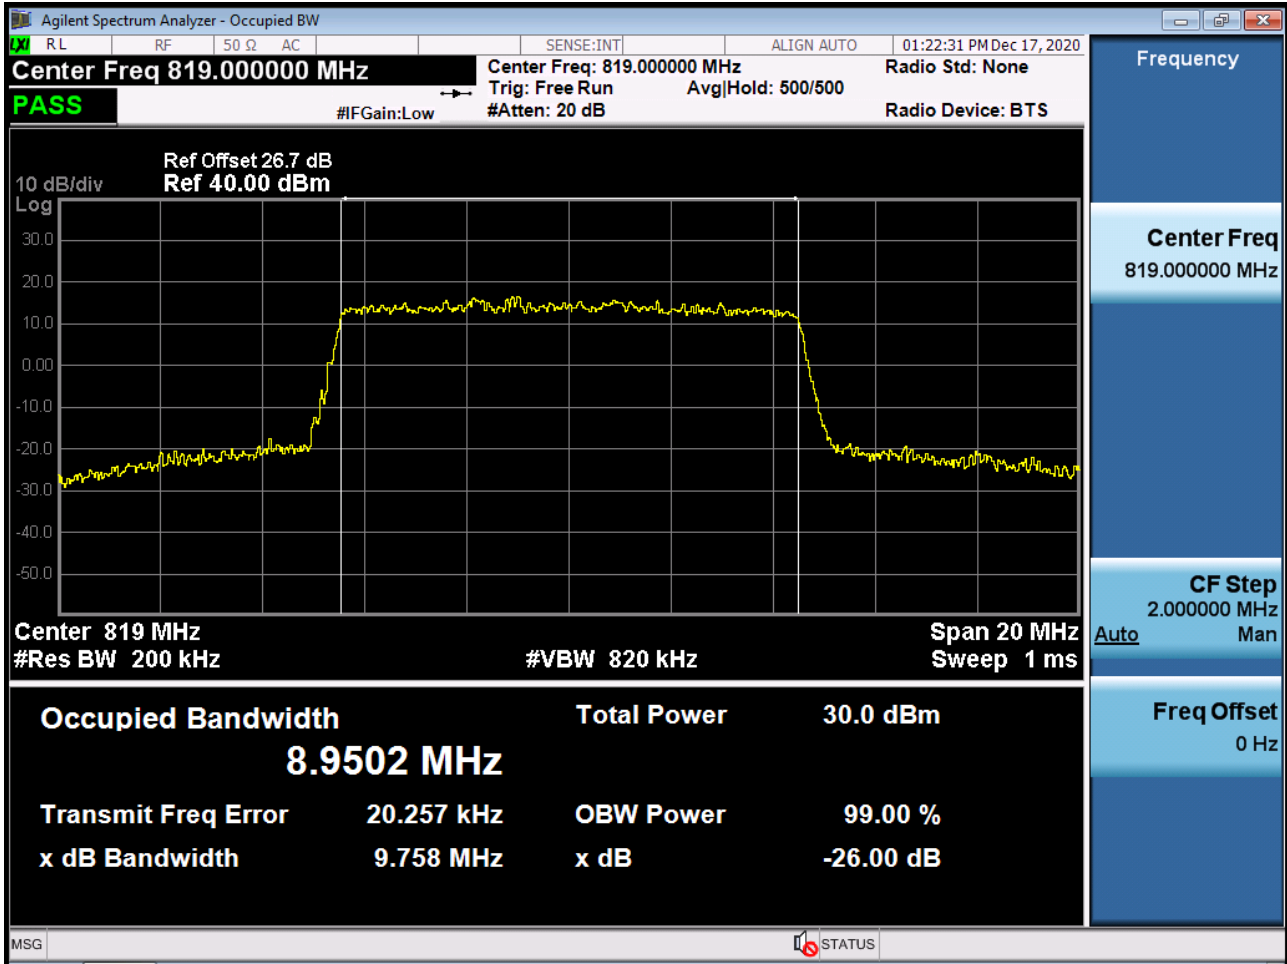





BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 QPSK RB 75\_0)

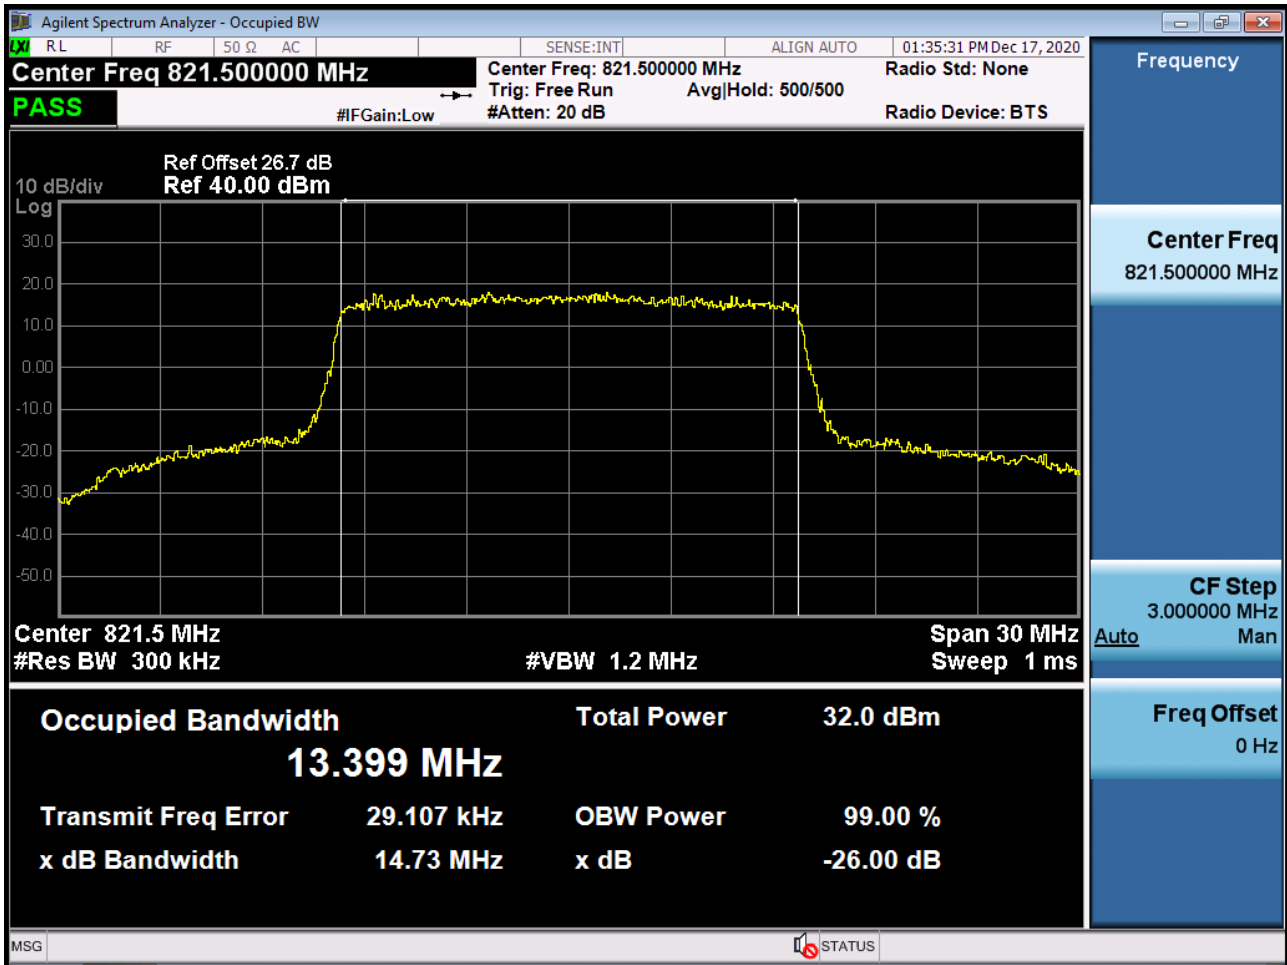


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 16QAM RB 75\_0)

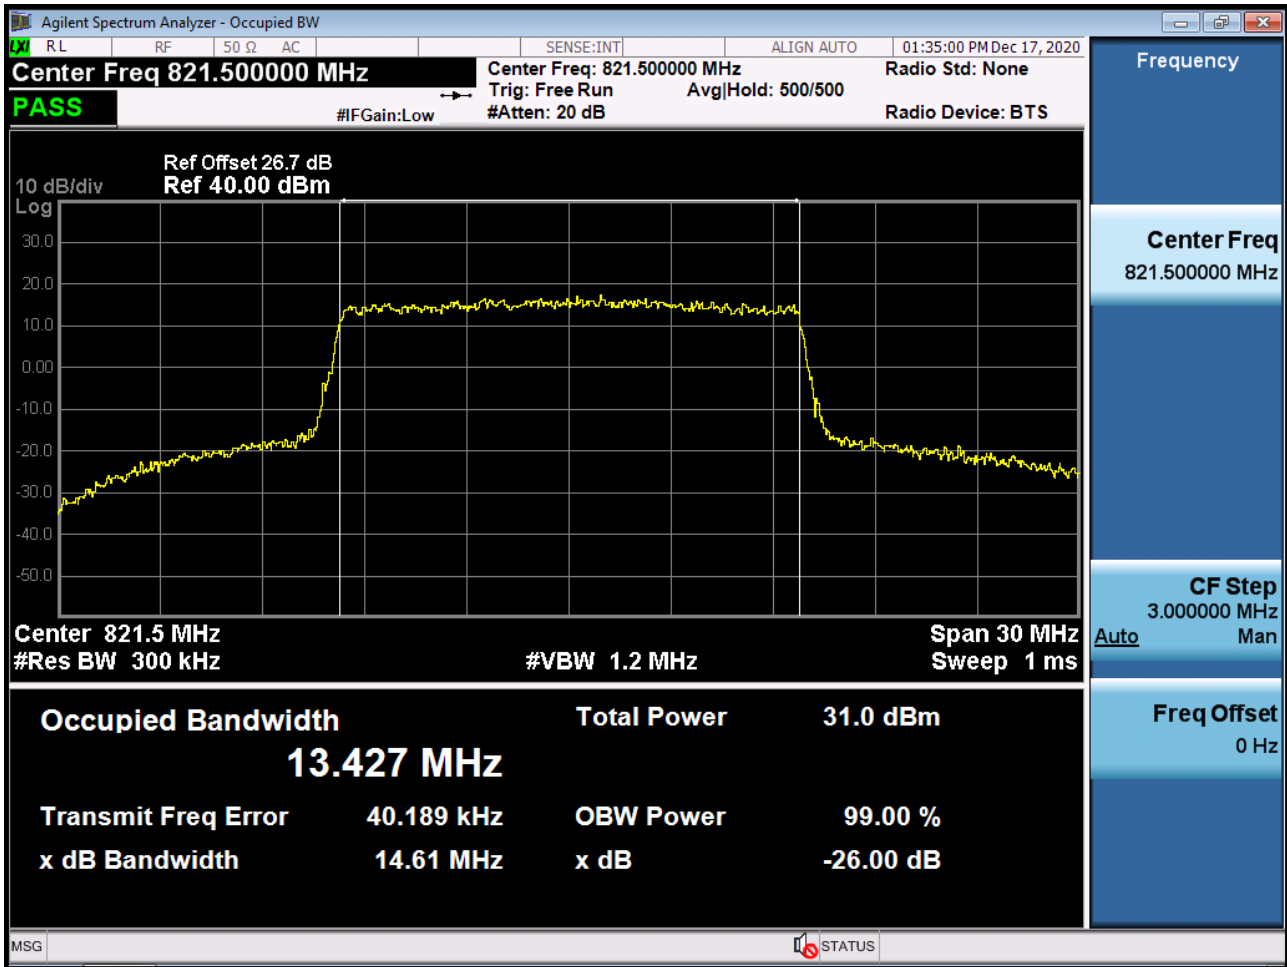


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 64QAM RB 75\_0)

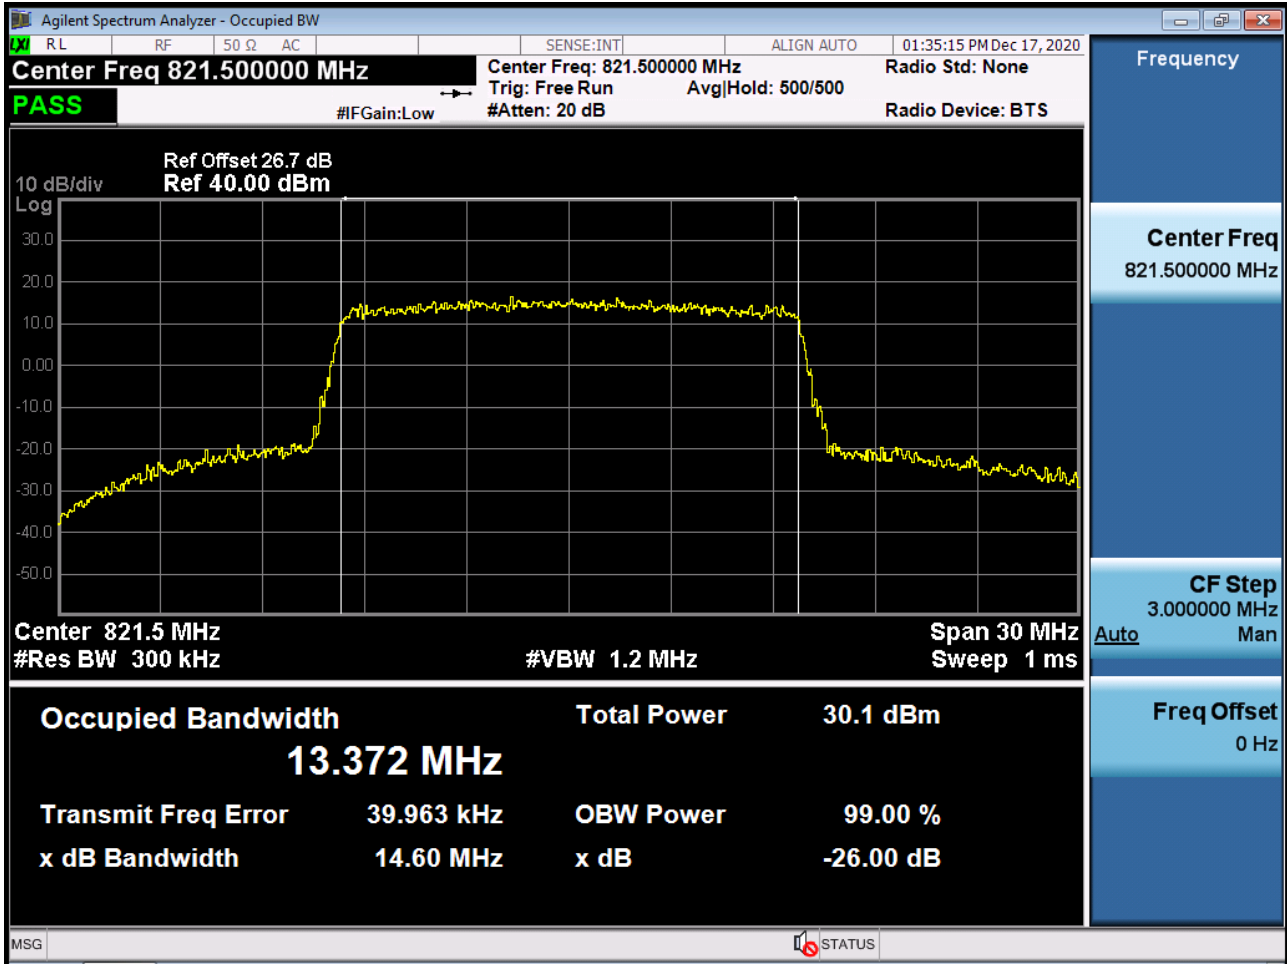


BAND 26. Lower Channel Edge Plot (1.4M BW Ch.26697 QPSK RB 1, Offset 0)

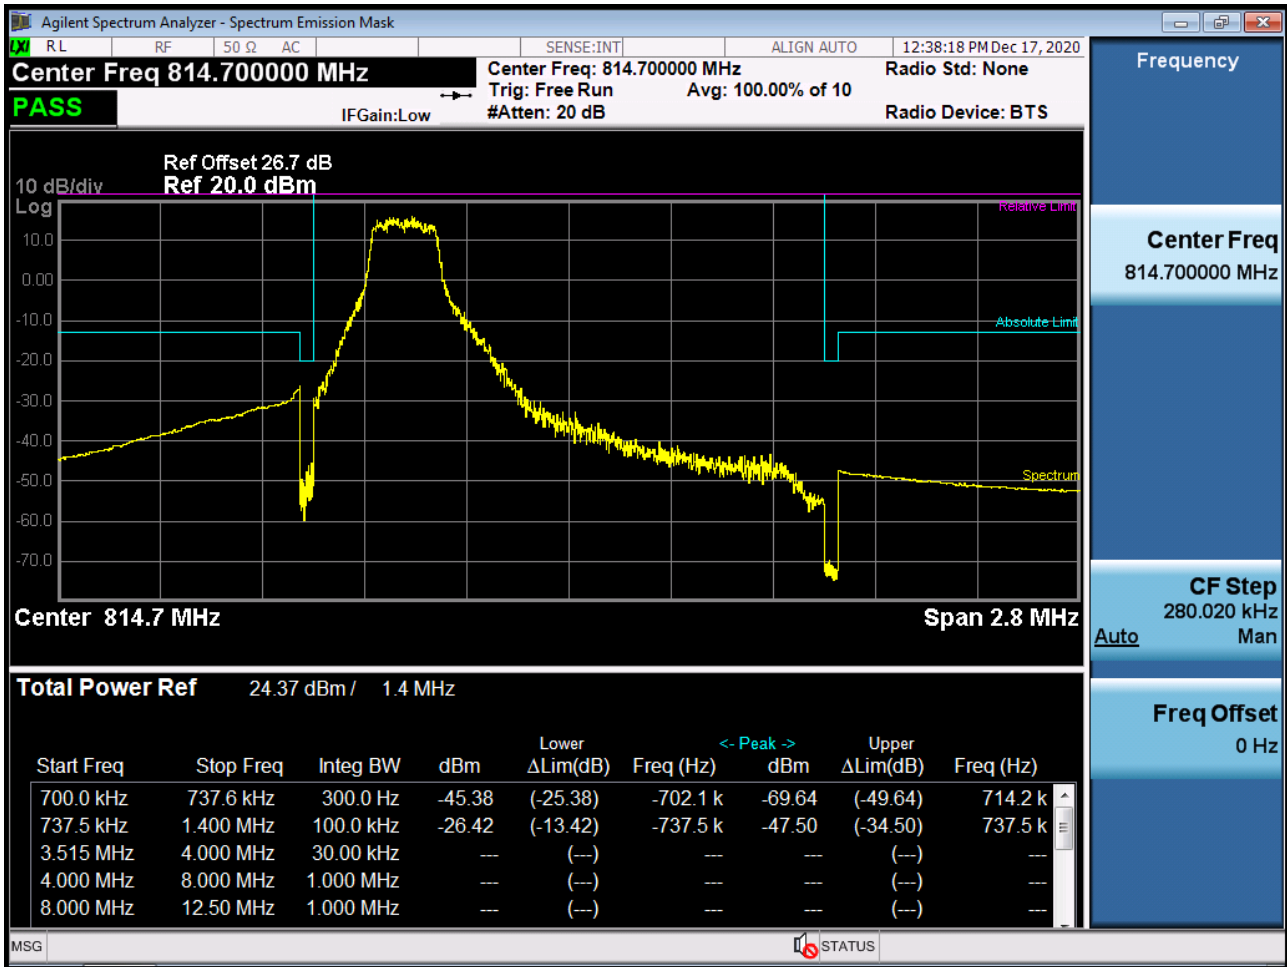


BAND 26. Lower Channel Edge Plot (1.4M BW Ch.26697 QPSK\_RB6\_Offset 0)

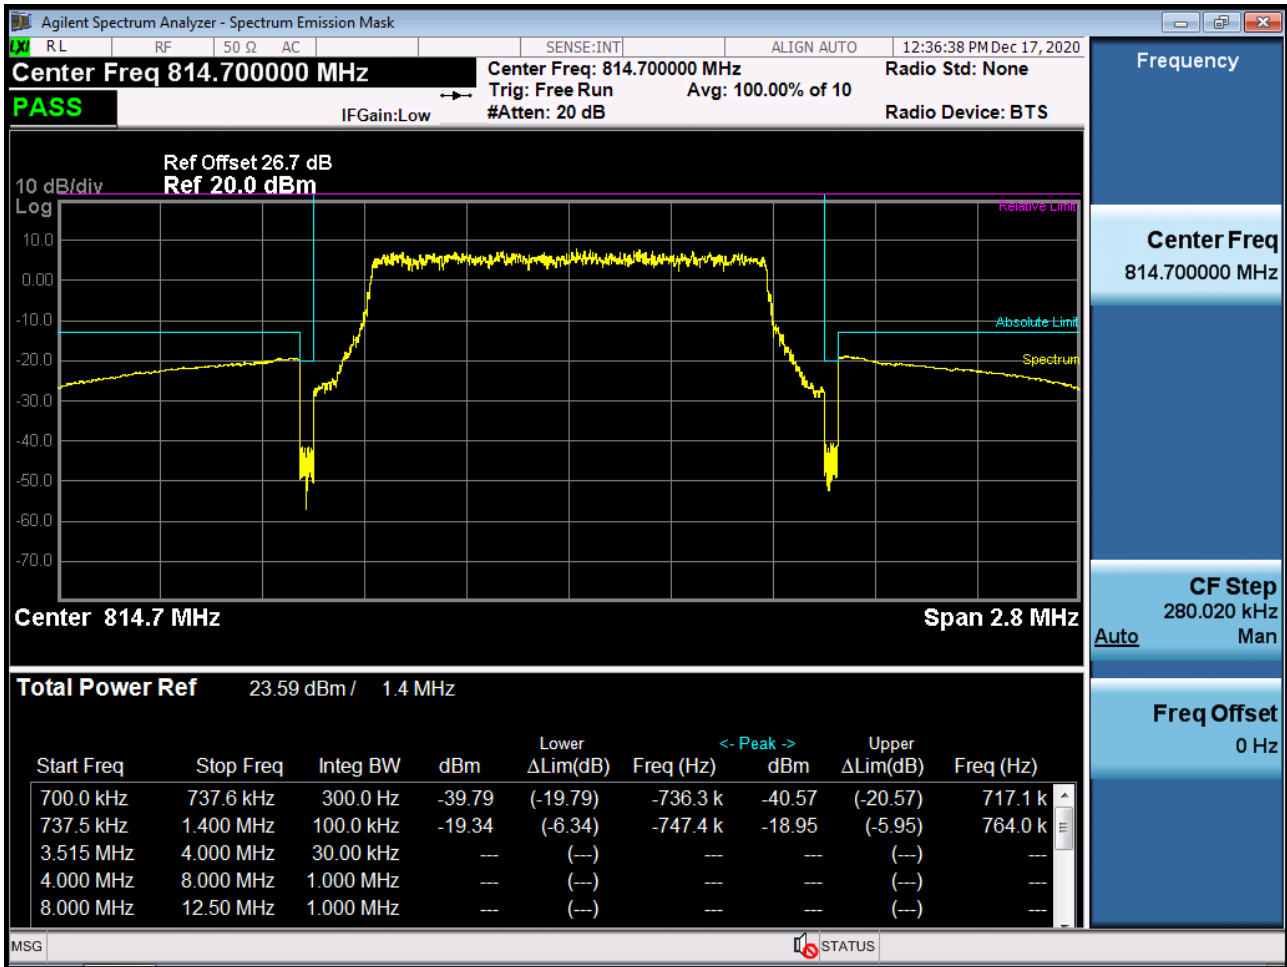


BAND 26. Lower Channel Edge Plot (3M BW Ch.26705 QPSK RB 1, Offset 0)

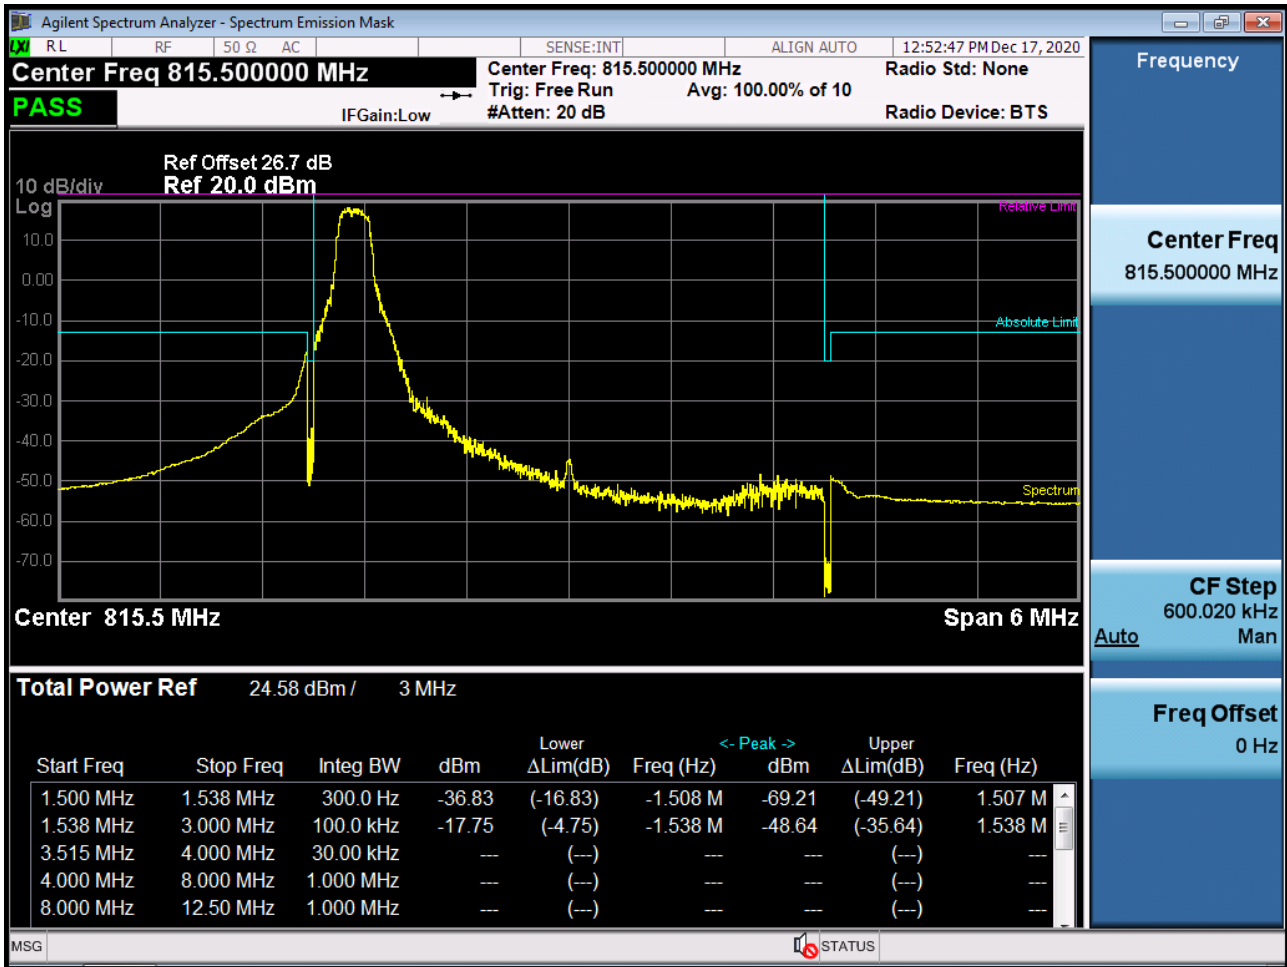

BAND 26. Lower Channel Edge Plot (3M BW Ch.26705 QPSK\_RB15\_Offset 0)

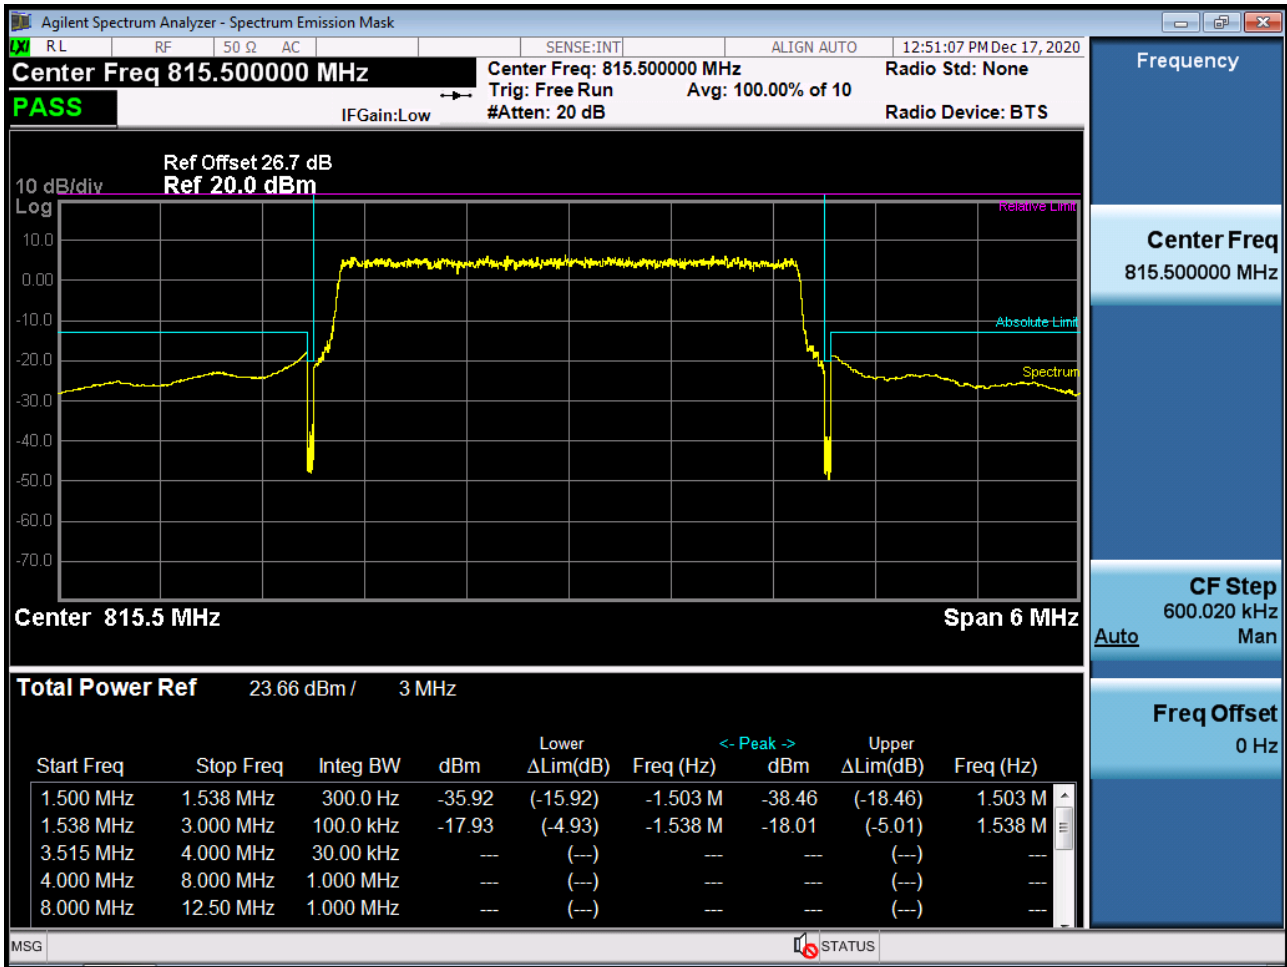


BAND 26. Lower Channel Edge Plot (5M BW Ch.26715 QPSK RB 1, Offset 0)

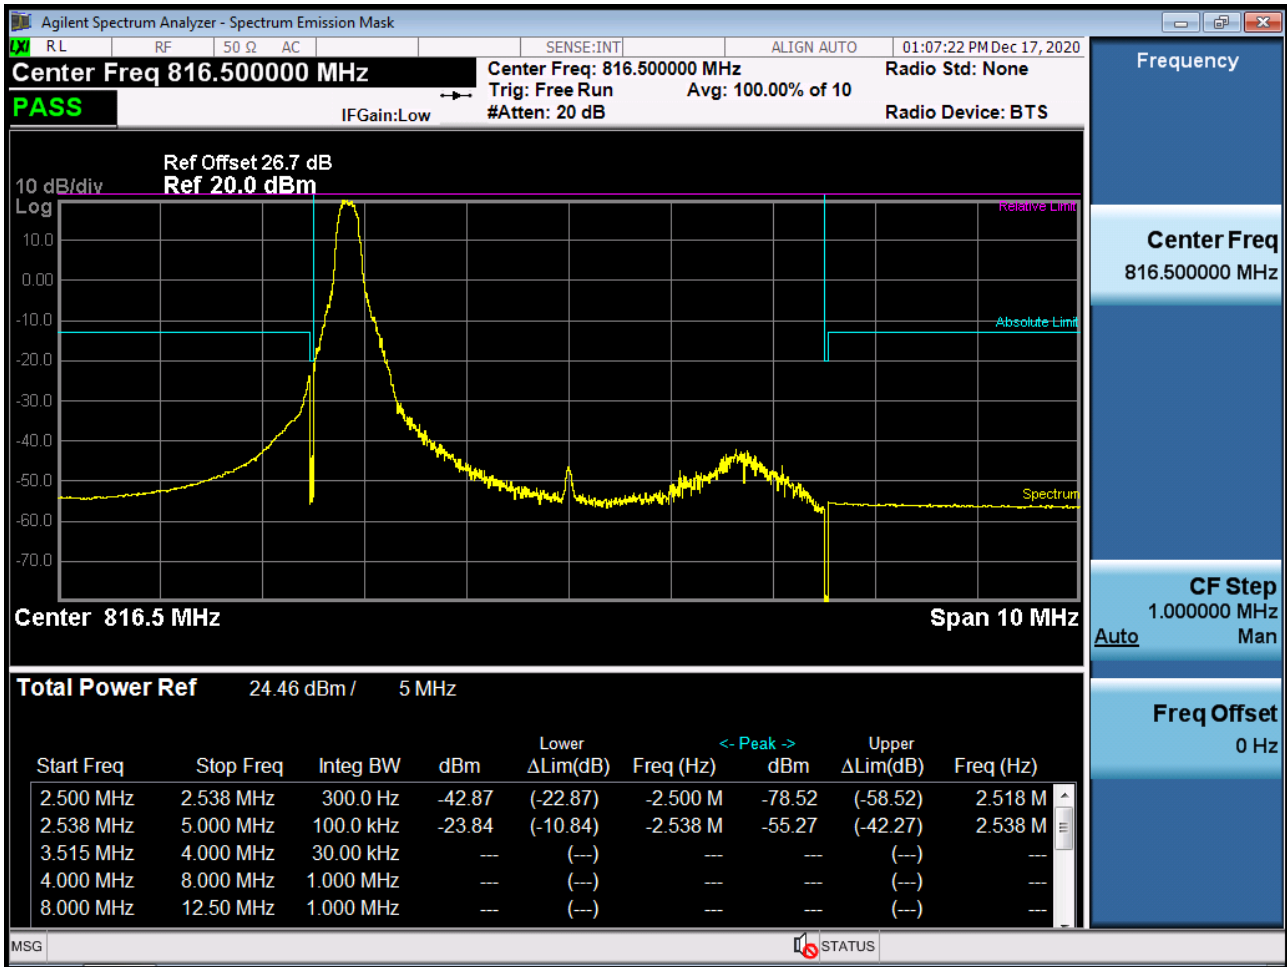





BAND 26. Lower Channel Edge Plot (5M BW Ch.26715 QPSK\_RB25\_Offset 0)

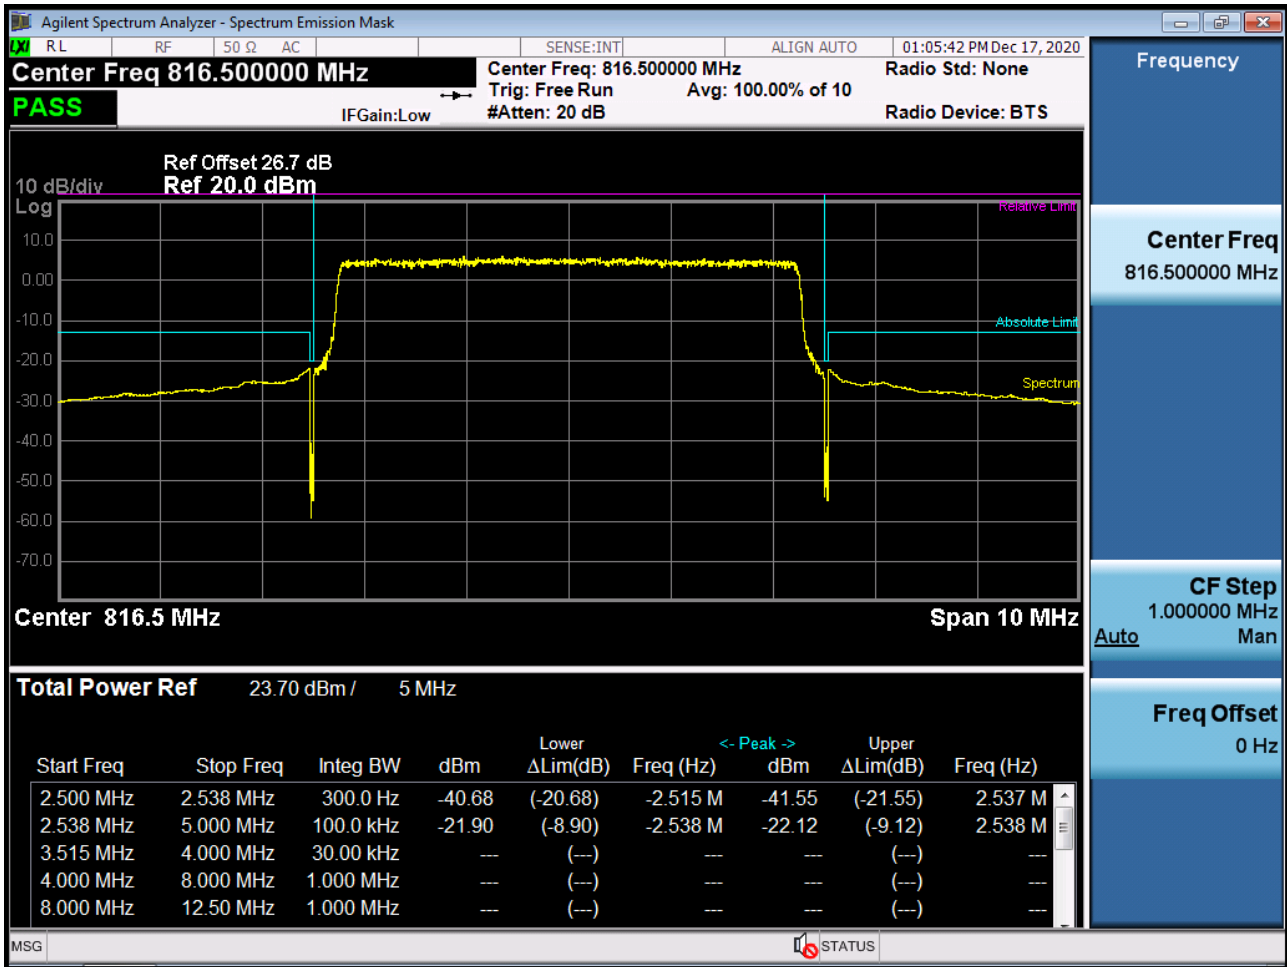


BAND 26. Low Channel Edge Plot (10M BW Ch.26740 QPSK RB 1, Offset 0)

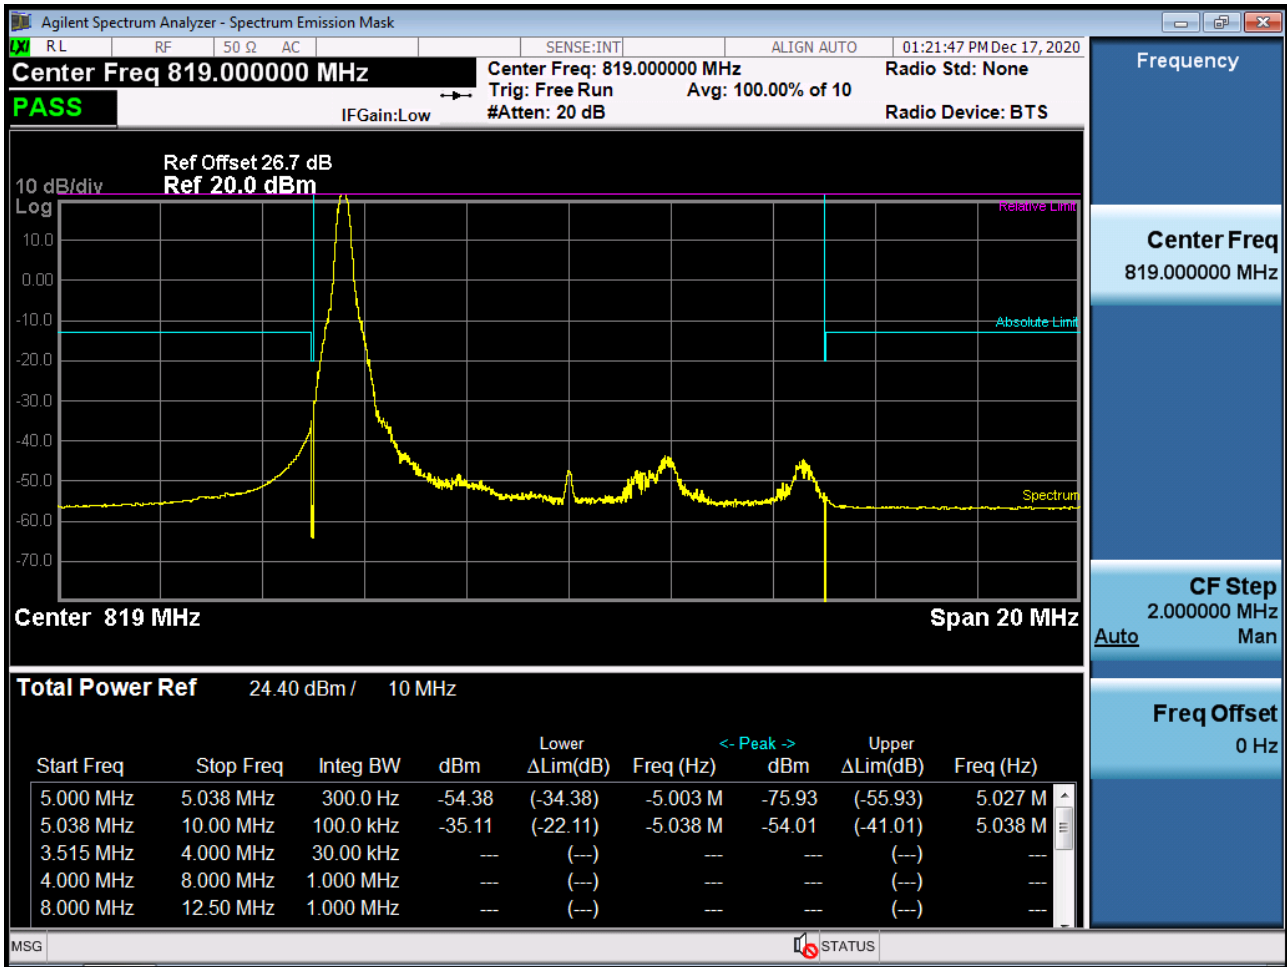


BAND 26. Low Channel Edge Plot (10M BW Ch.26740 QPSK\_RB50\_Offset 0)

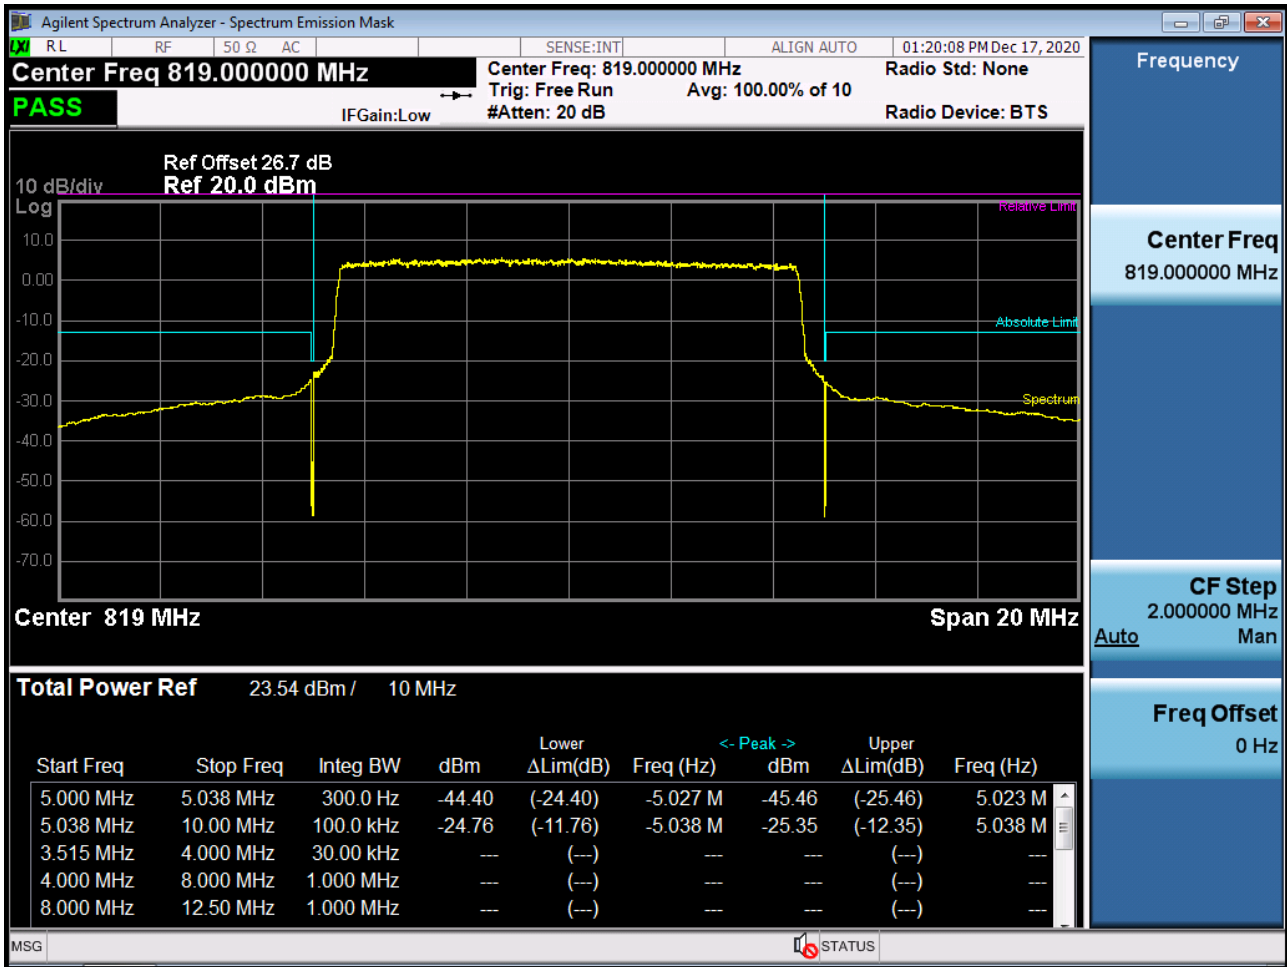


BAND 26. Mid Channel Edge Plot (10M BW Ch. 26740 QPSK\_RB1\_Offset 49)

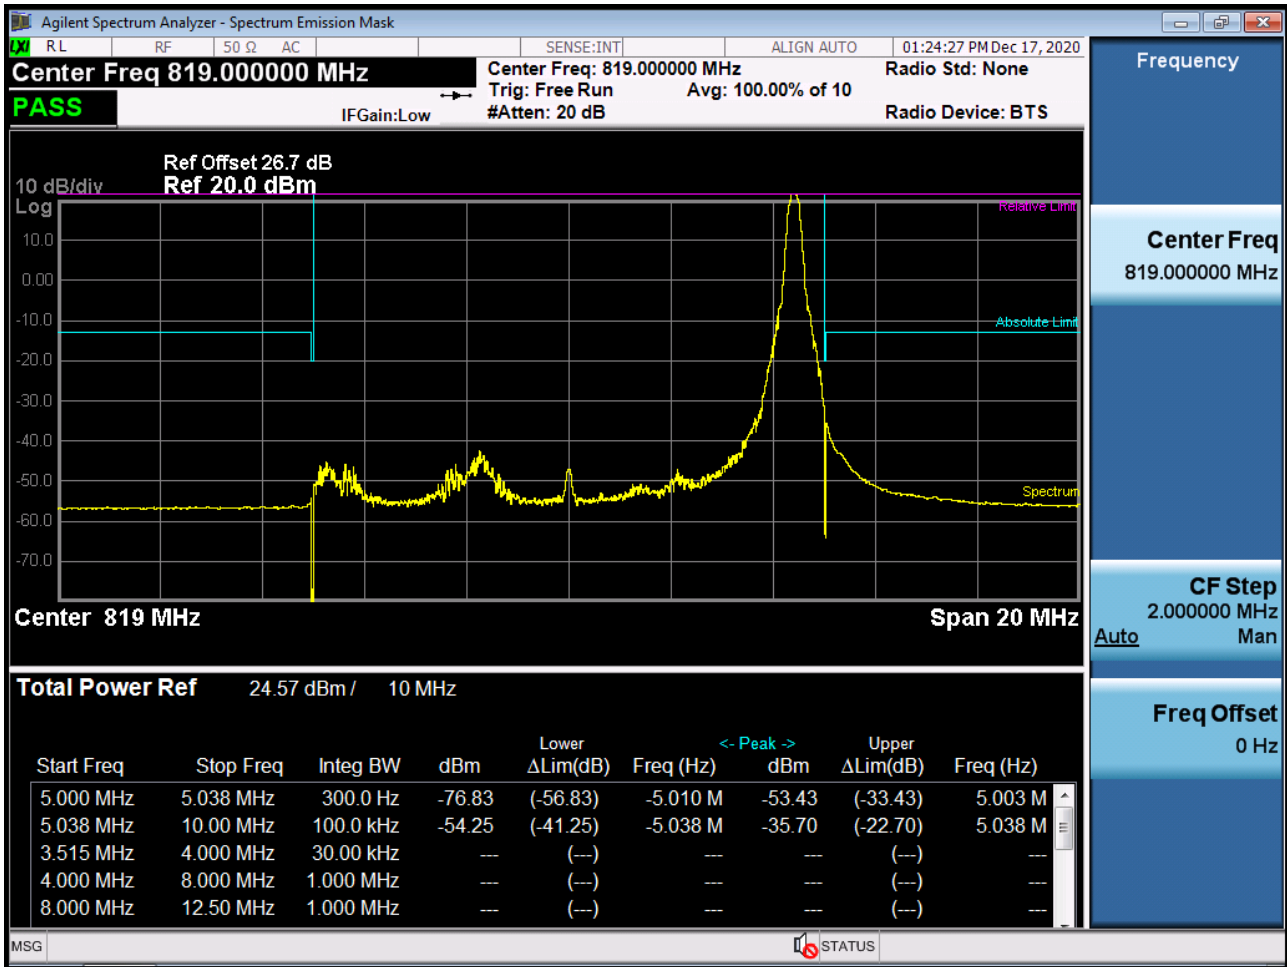


BAND 26. Low Channel Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset 0)

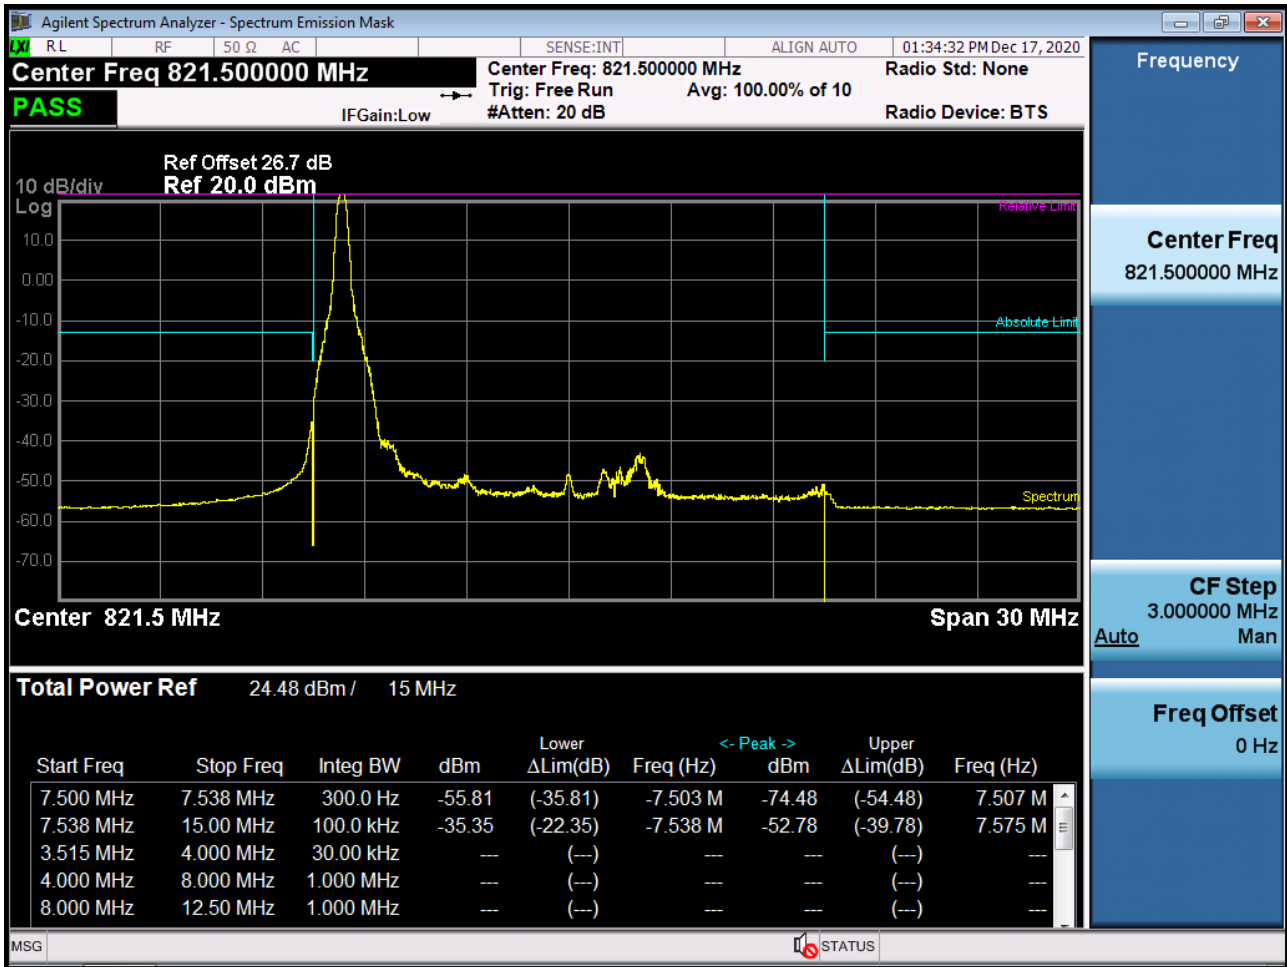


BAND 26. Low Channel Edge Plot (15M BW Ch.26765 QPSK RB 75, Offset0)

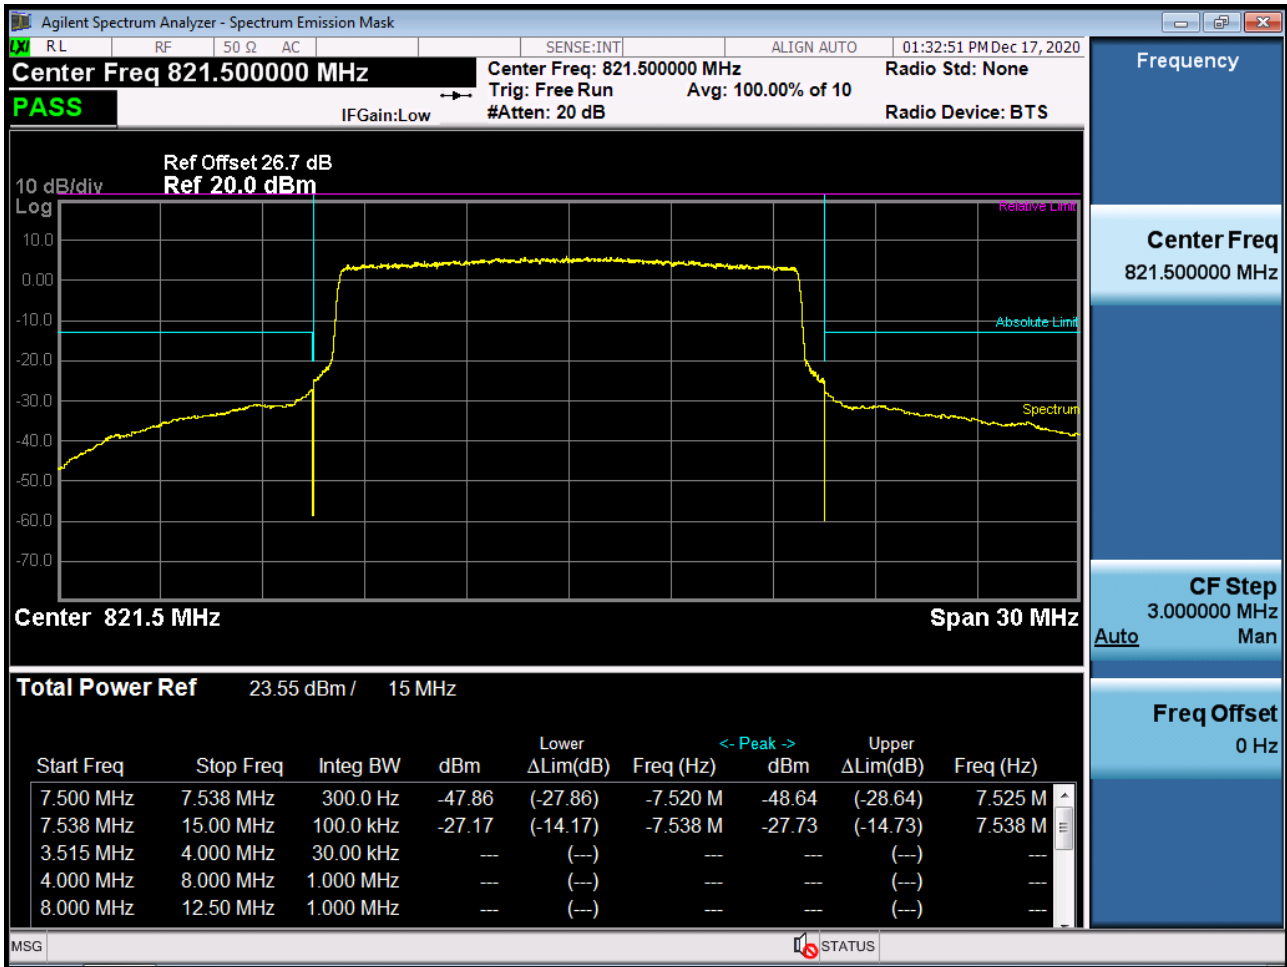

BAND 26. Mid Channel Edge Plot (15M BW Ch.26765 QPSK\_RB1\_Offset 74)

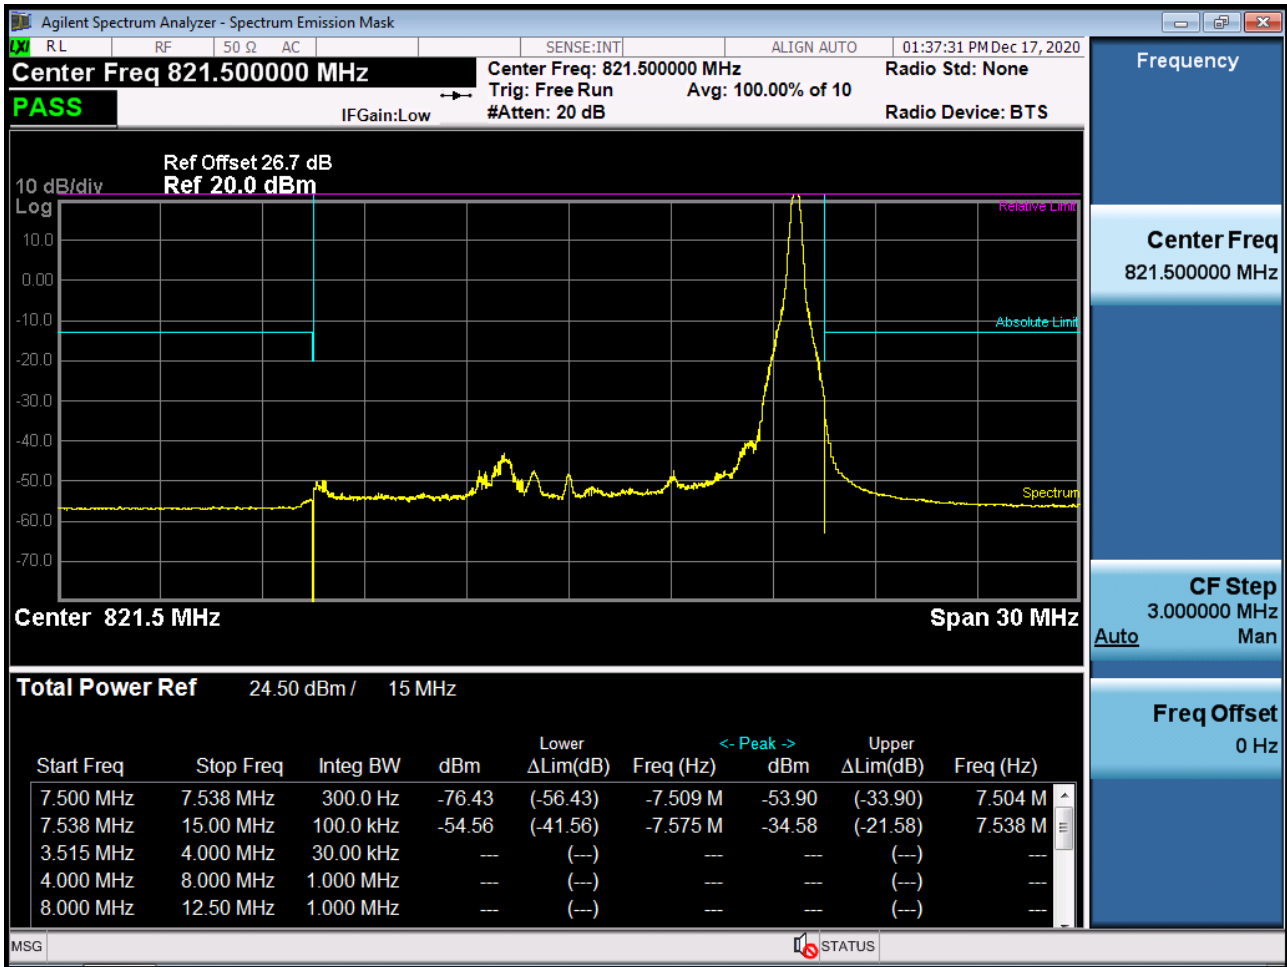

BAND 26. Mid Band Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset74)

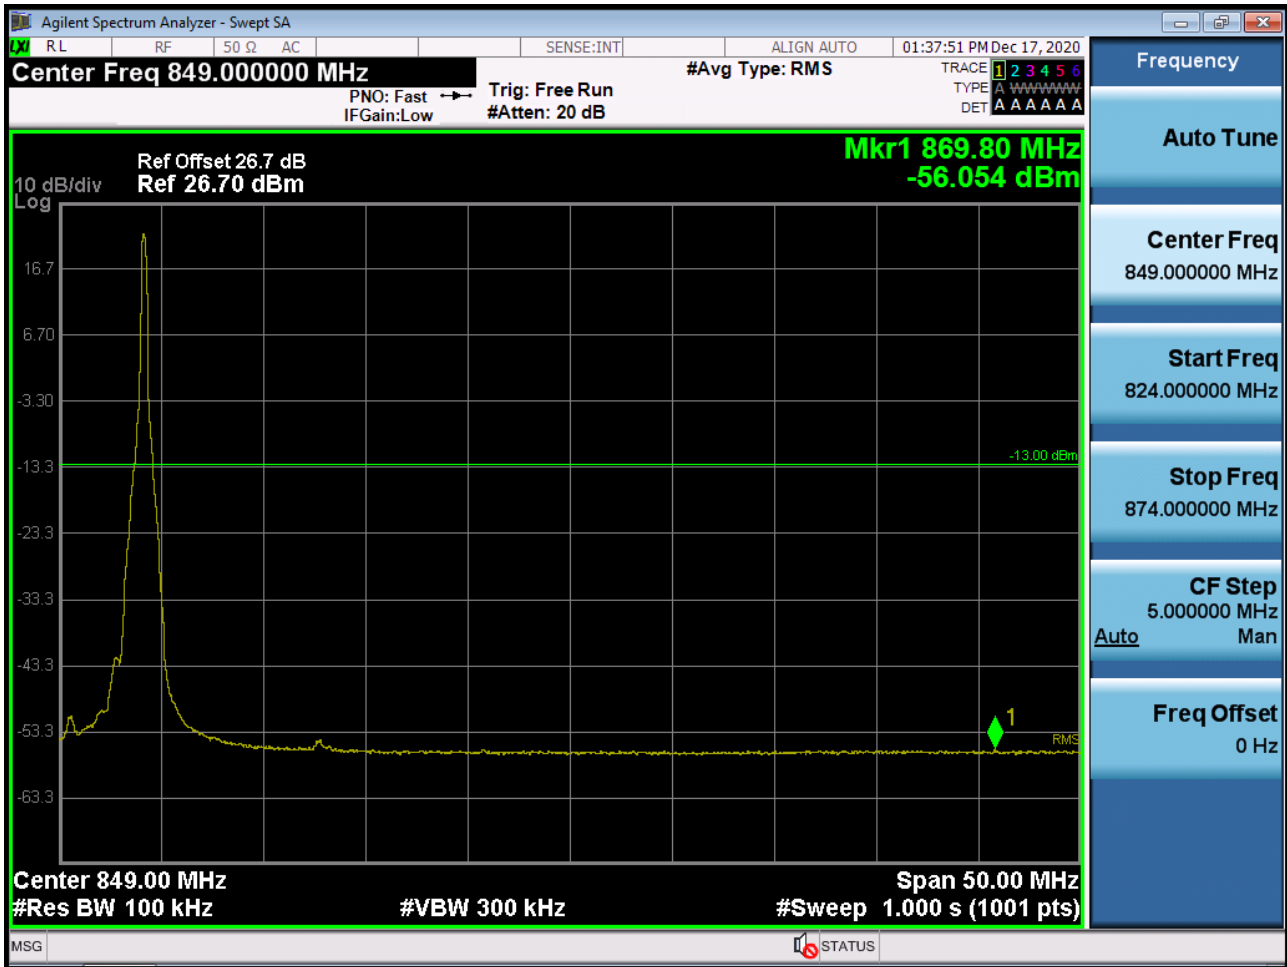





BAND 26. Mid Band Edge Plot (15M BW Ch.26765 QPSK\_RB75\_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4M BW Ch.26783 QPSK\_RB1\_Offset 5)

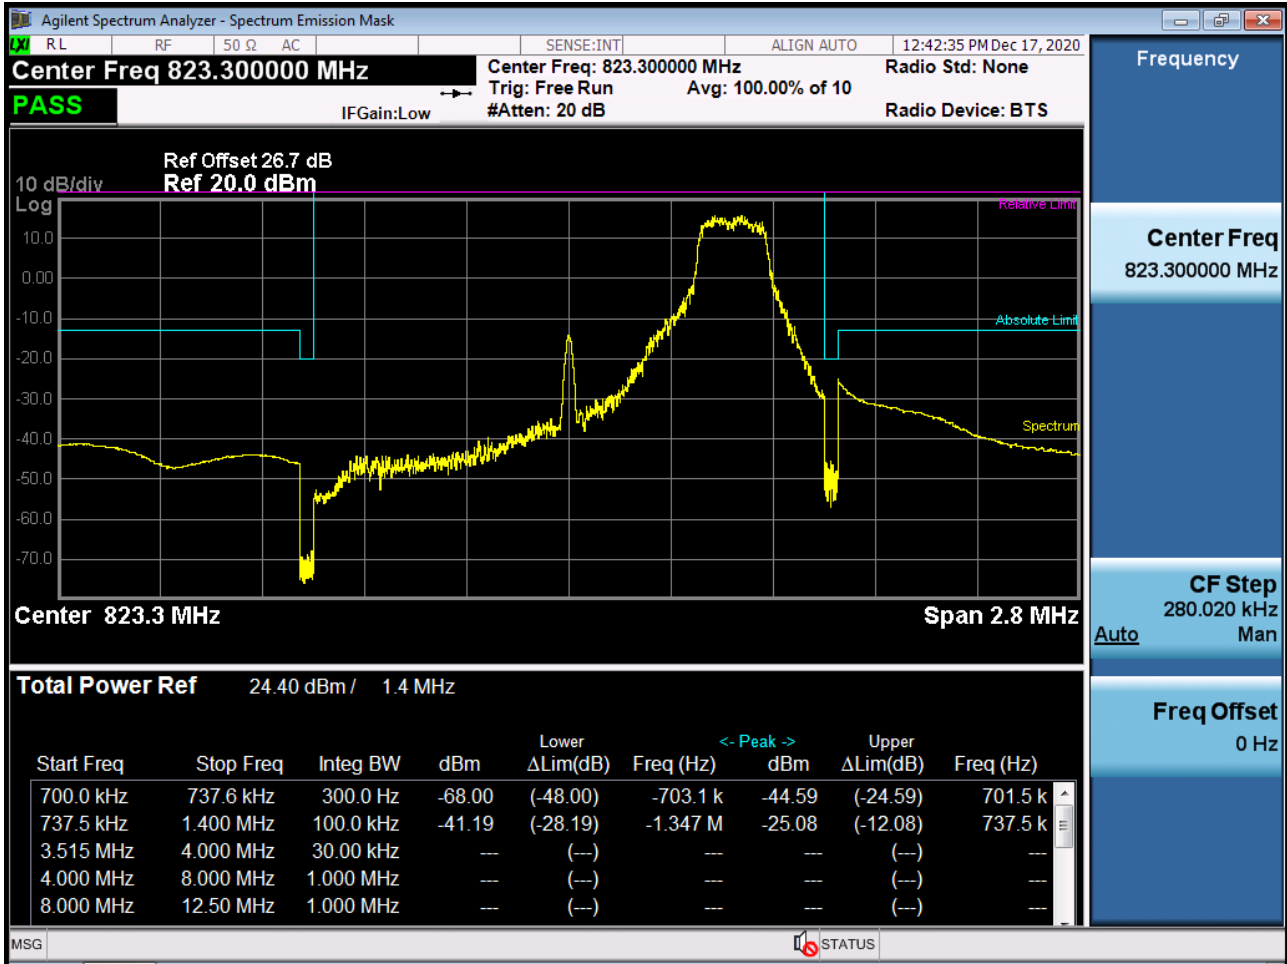


BAND 26. Upper Channel Edge Plot (1.4M BW Ch.26783 QPSK\_RB6\_Offset 0)

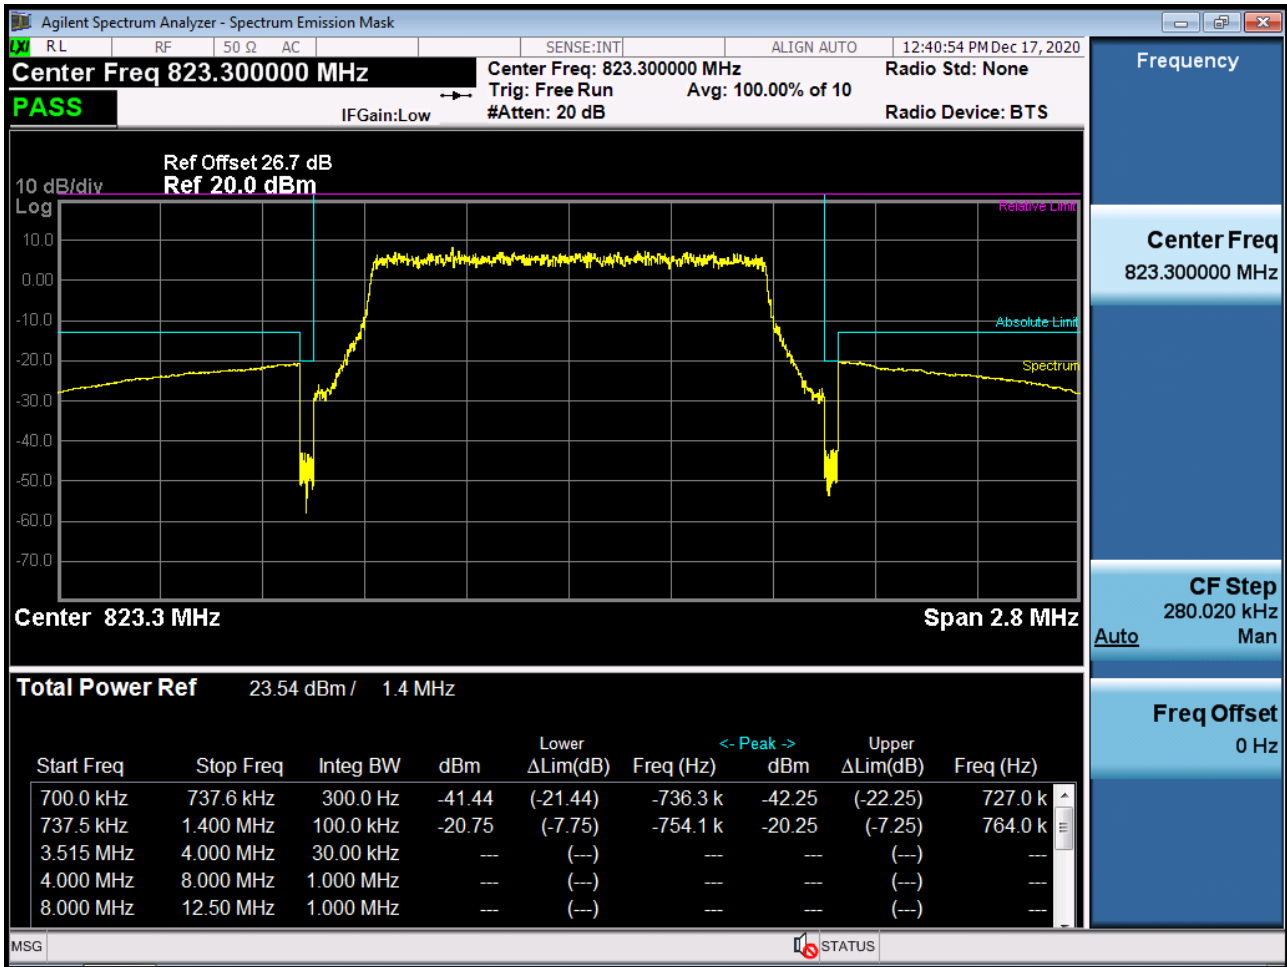


BAND 26. Upper Channel Edge Plot (3M BW Ch.26775 QPSK\_RB1\_Offset 14)

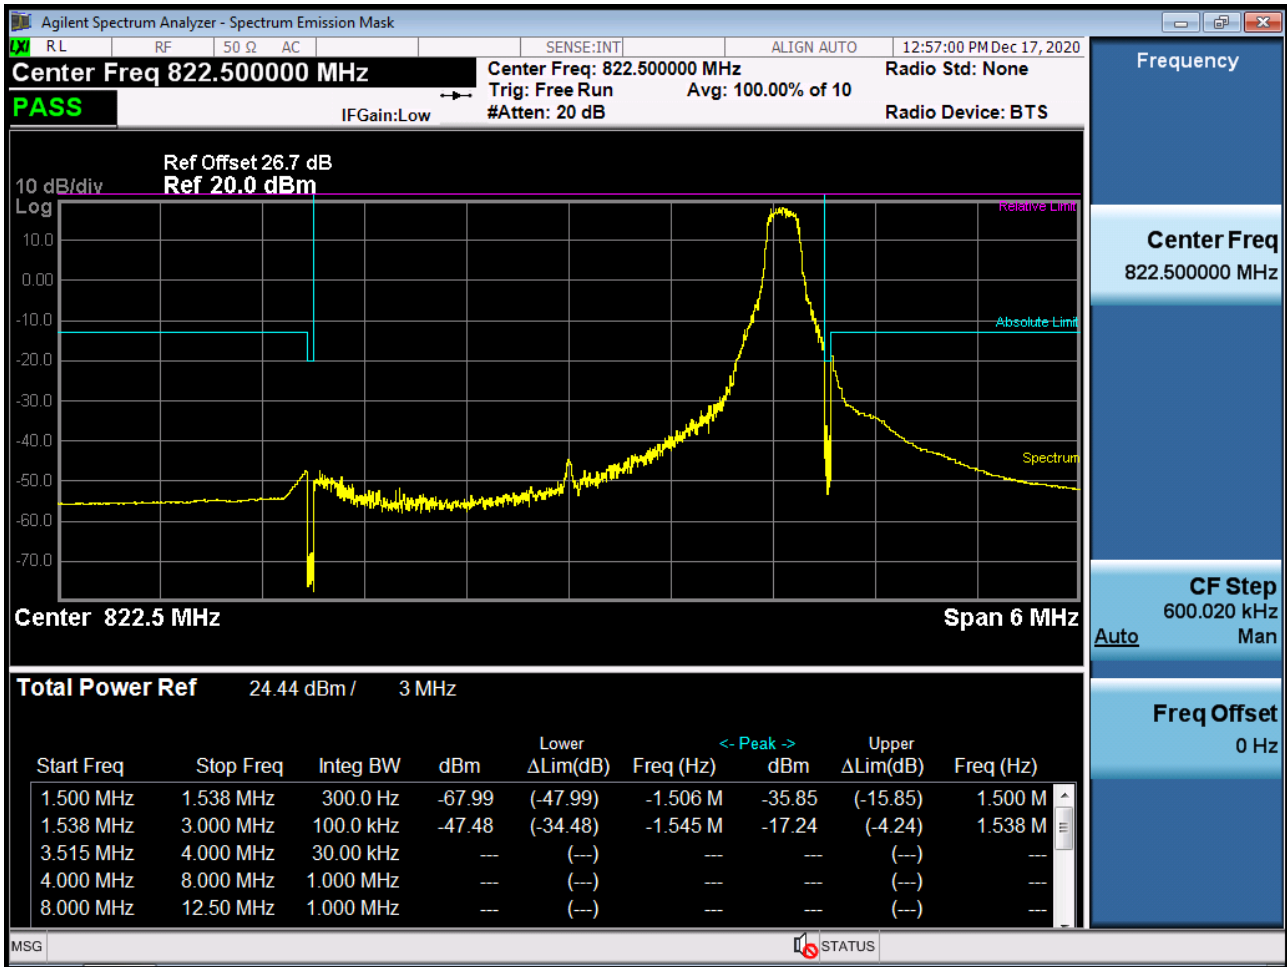


BAND 26. Upper Channel Edge Plot (3M BW Ch.26775 QPSK\_RB15\_Offset 0)

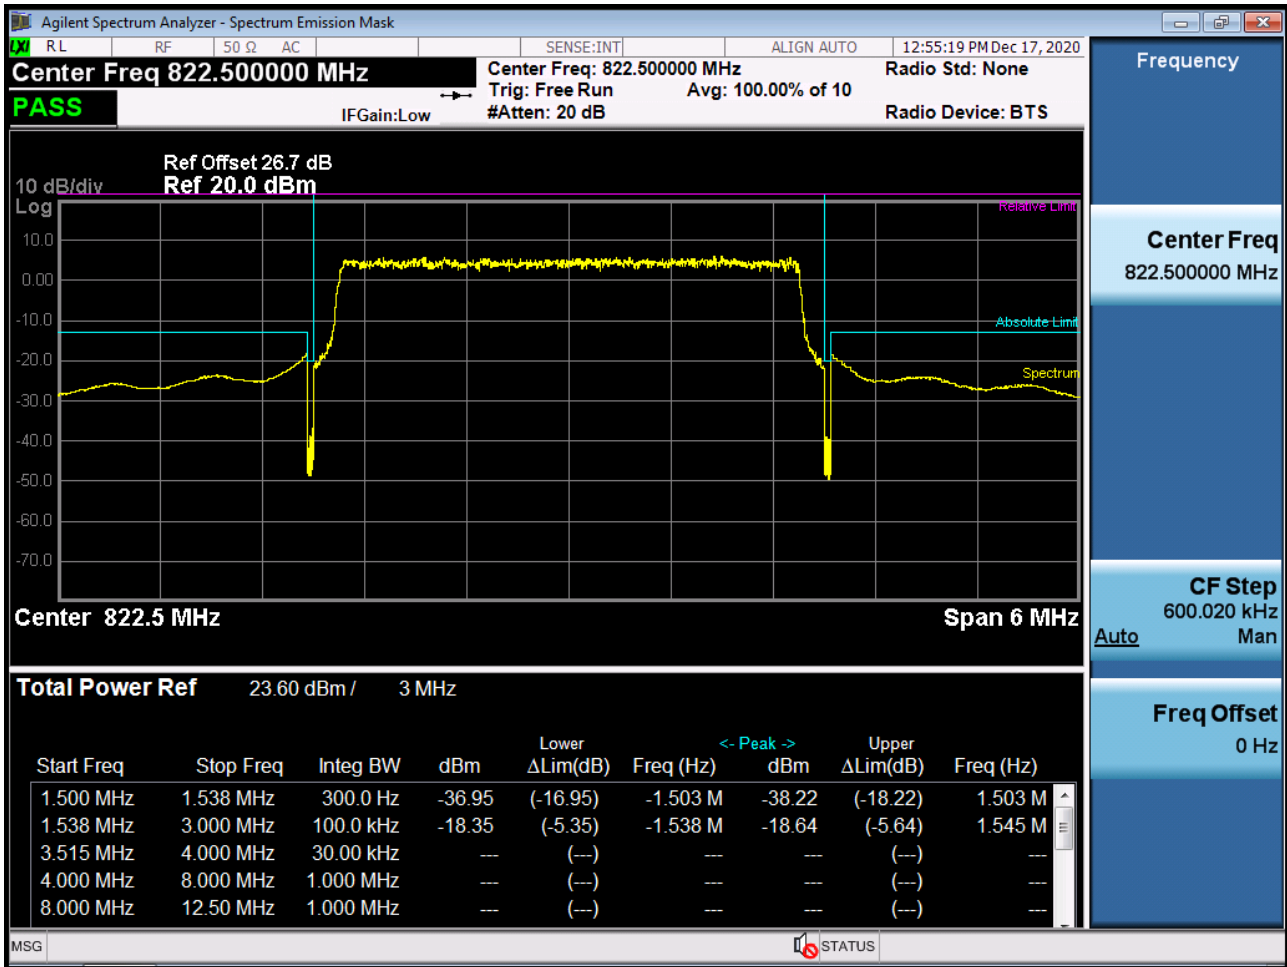


BAND 26. Upper Channel Edge Plot (5M BW Ch.26765 QPSK\_RB1\_Offset 24)

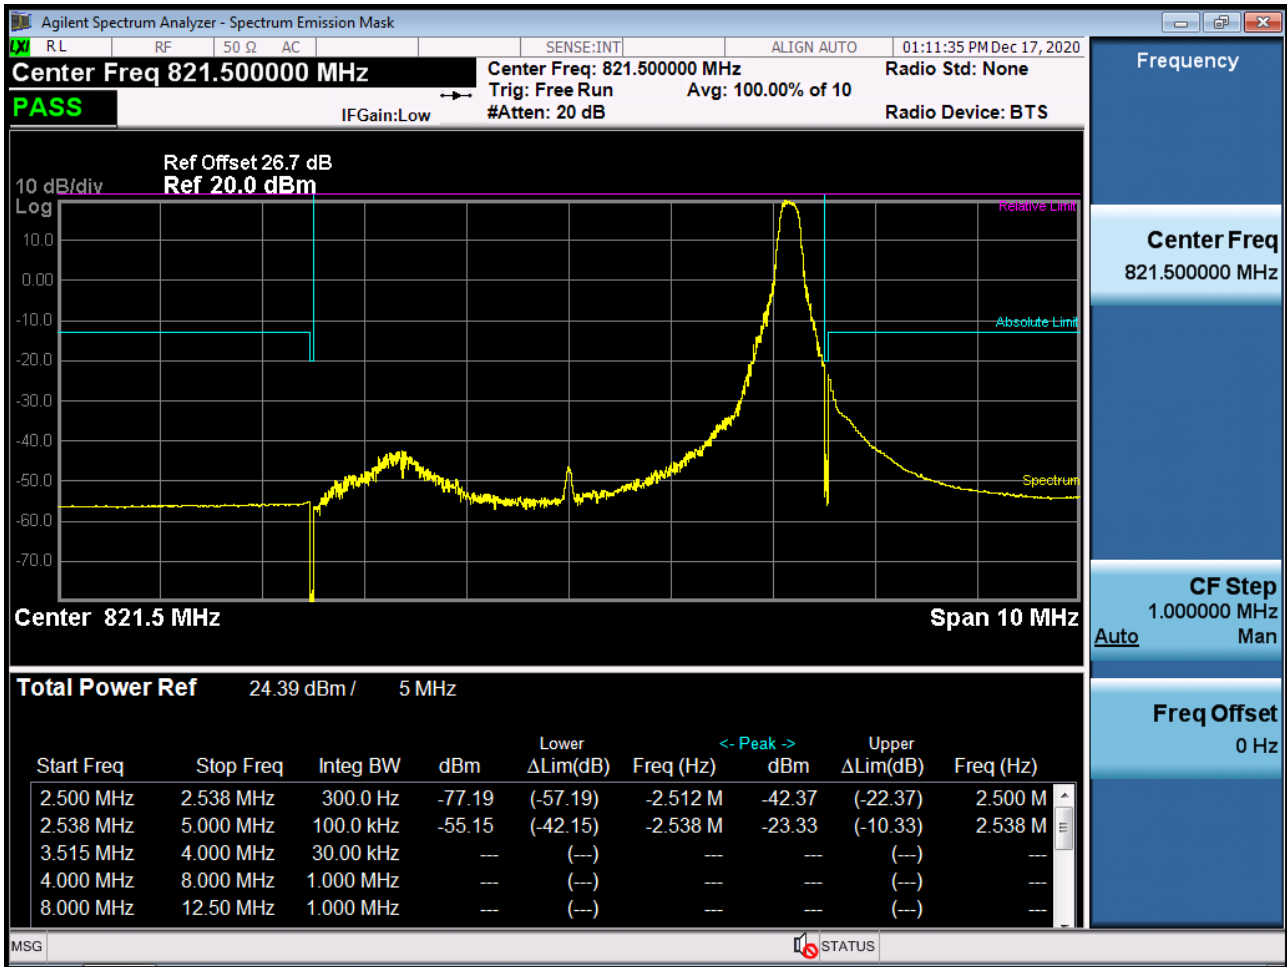

BAND 26. Upper Channel Edge Plot (5M BW Ch.26765 QPSK\_RB25\_Offset 0)

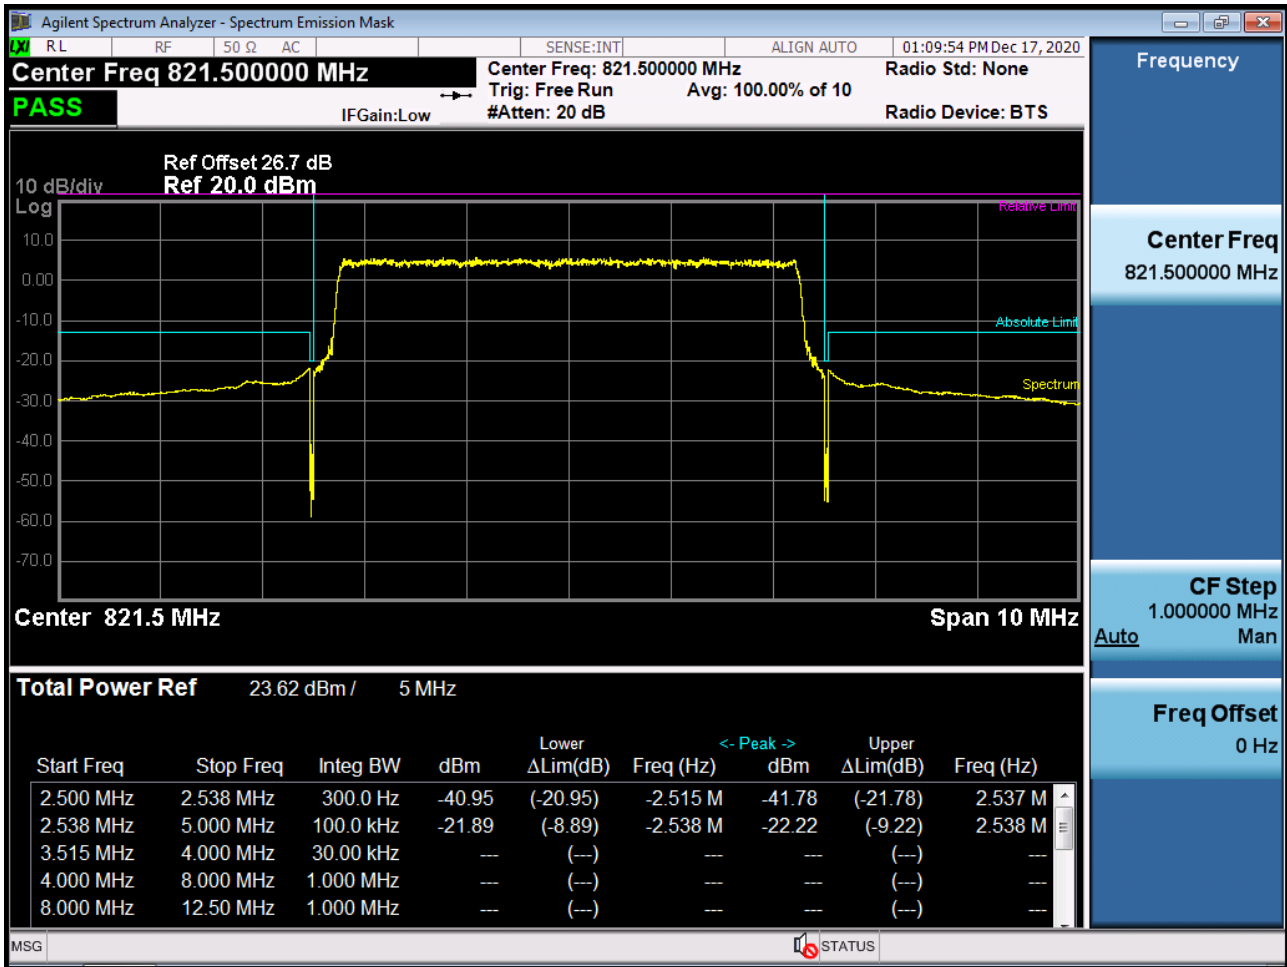


BAND 26. Conducted Spurious (26697 ch\_1.4MHz\_QPSK\_RB 1\_0)

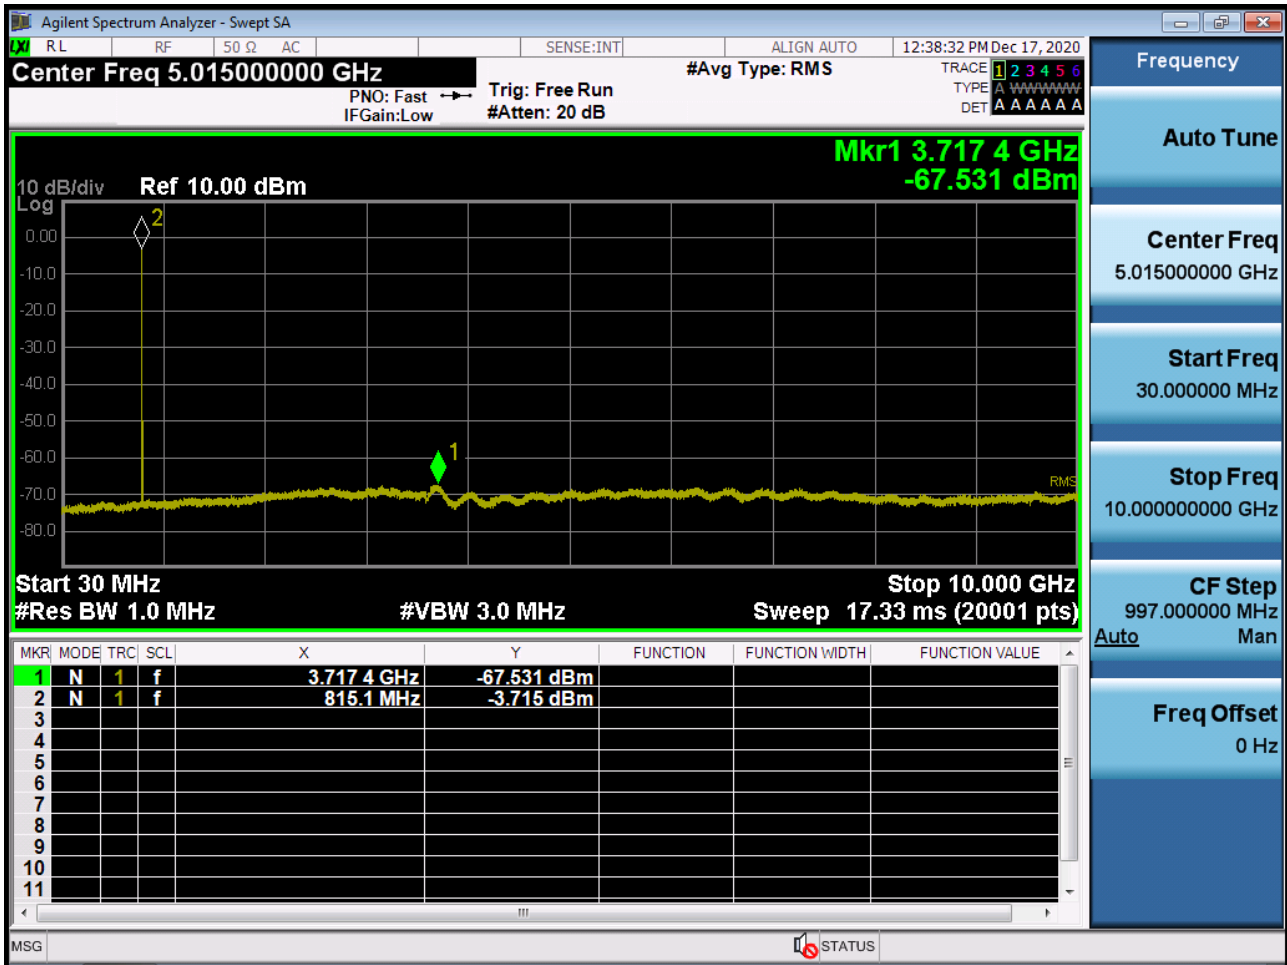





BAND 26. Conducted Spurious (26783 ch\_1.4MHz\_QPSK\_RB 1\_0)

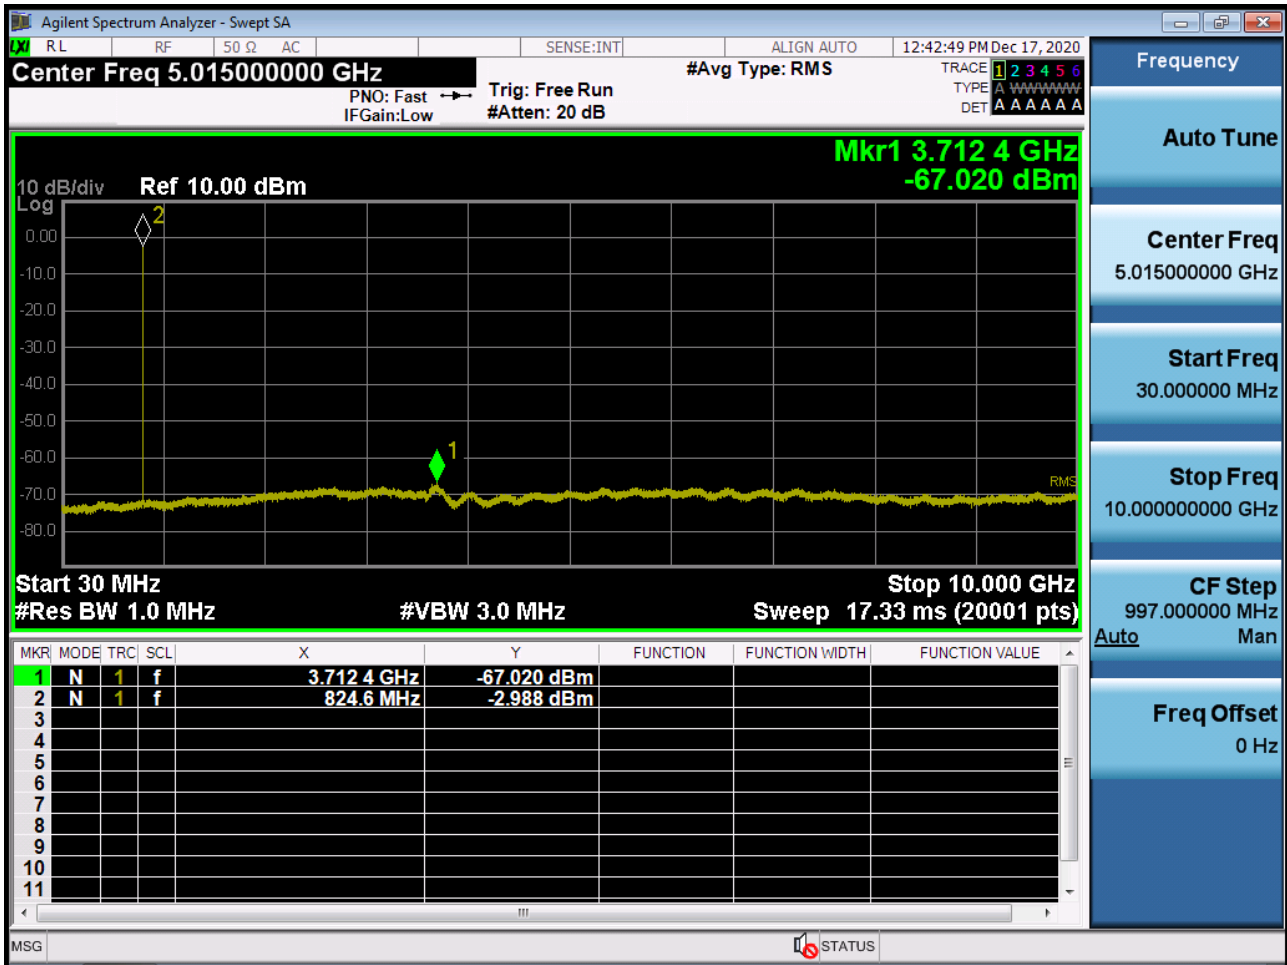


BAND 26. Conducted Spurious (26705 ch\_3MHz\_QPSK\_RB 1\_0)

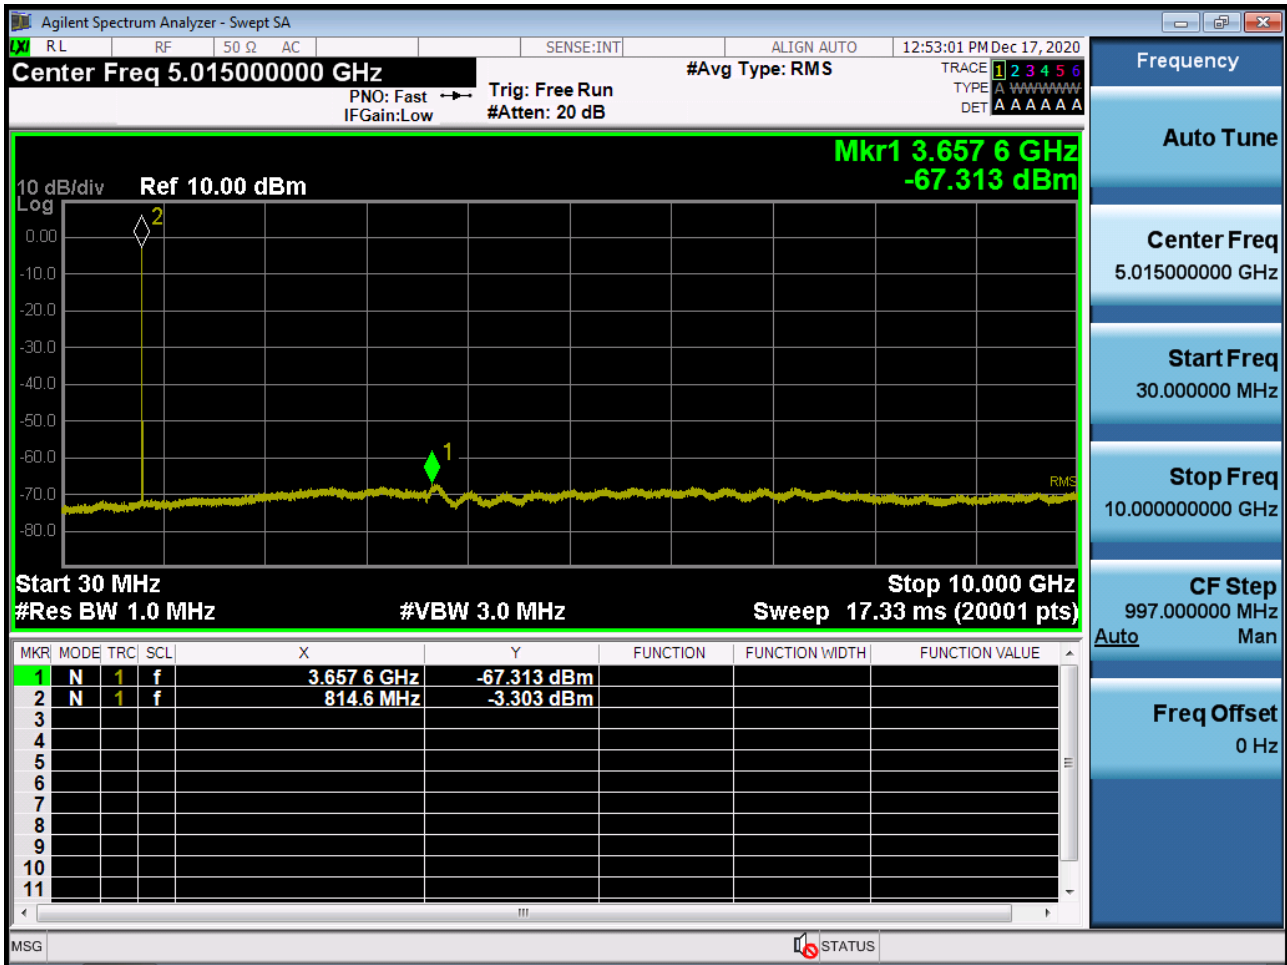


BAND 26. Conducted Spurious (26775 ch\_3MHz\_QPSK\_RB 1\_0)

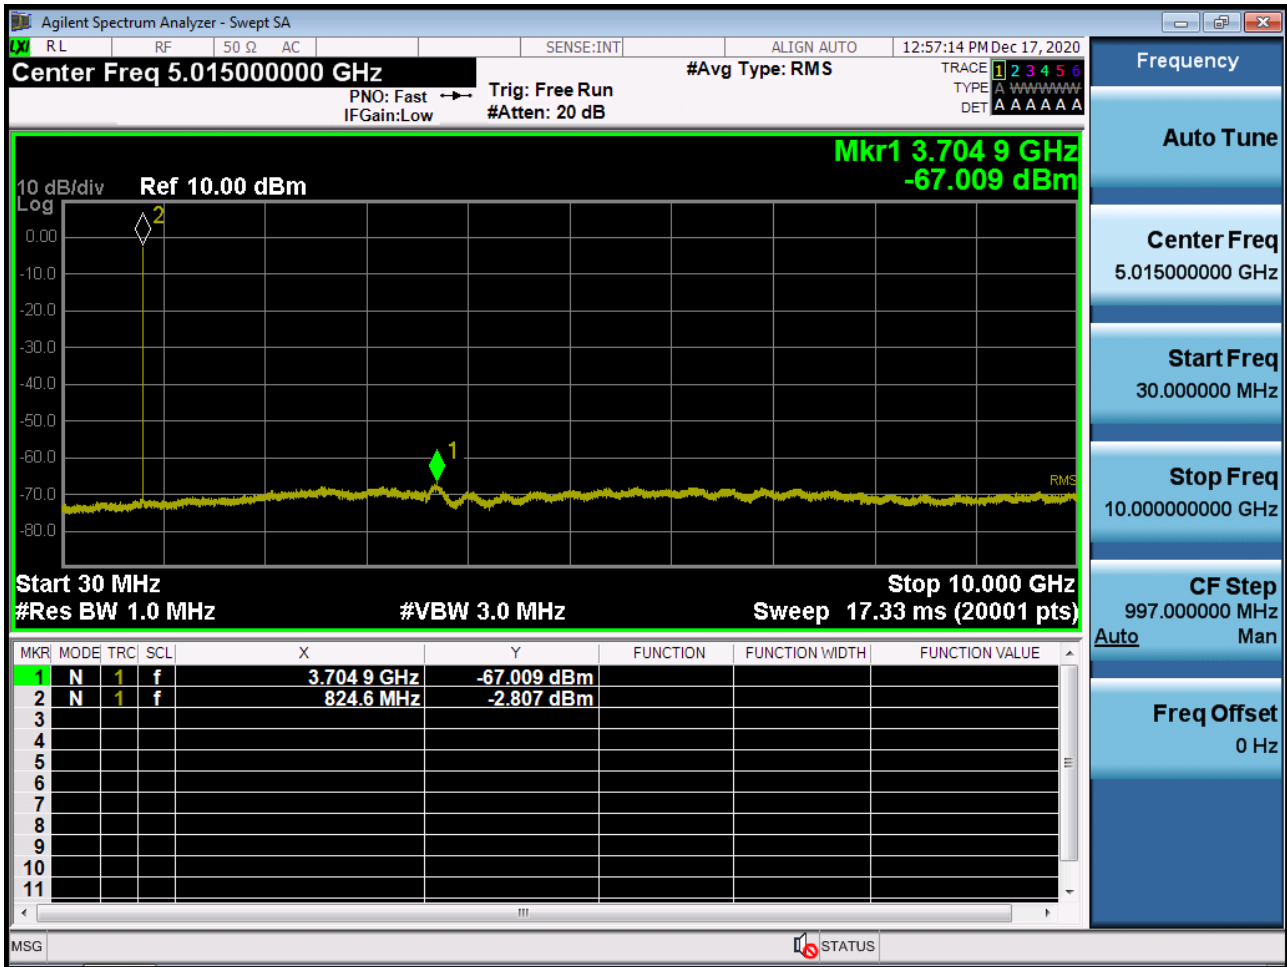


BAND 26. Conducted Spurious (26715 ch\_5MHz\_QPSK\_RB 1\_0)

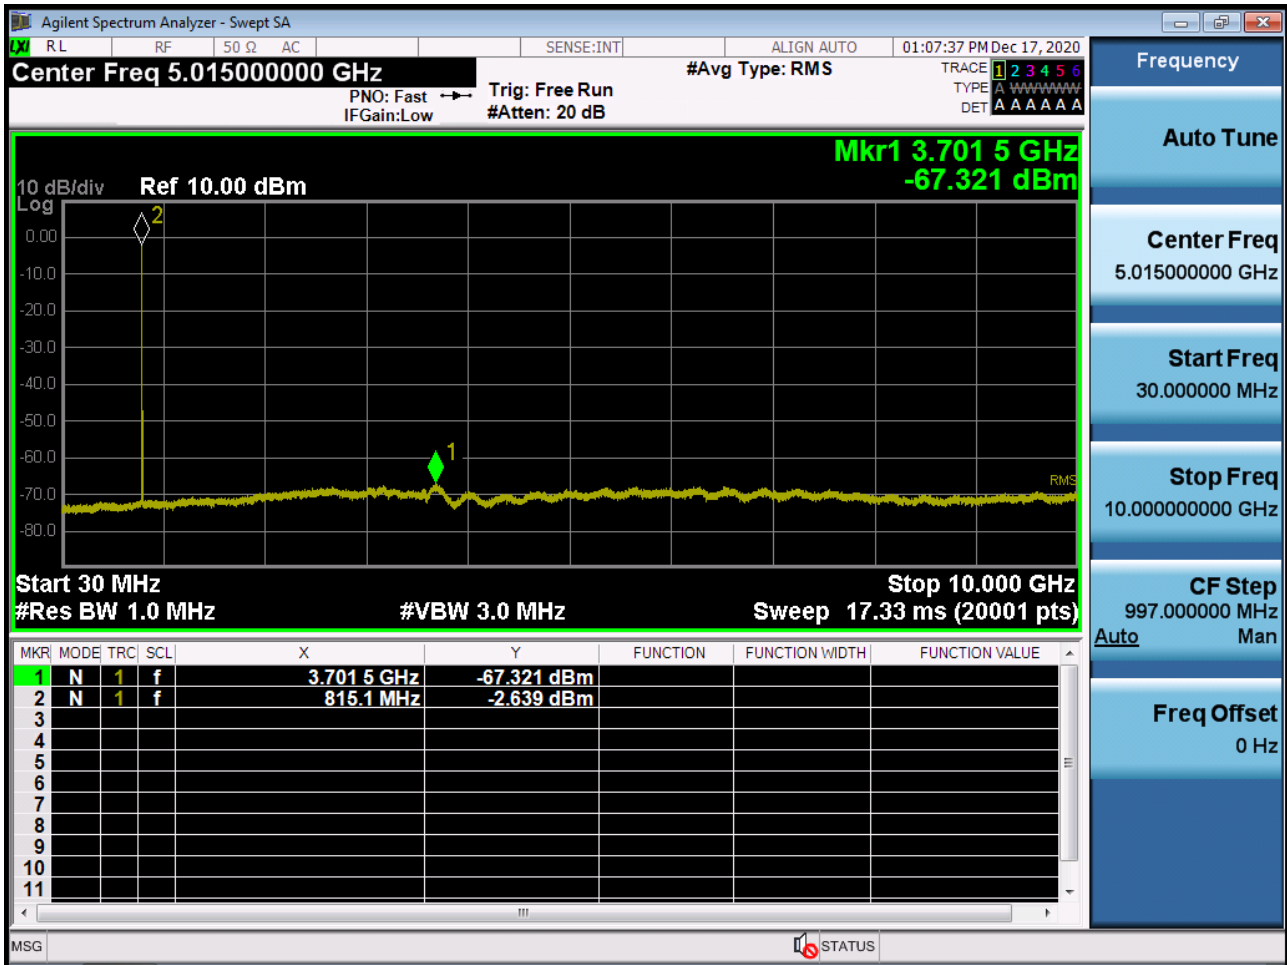


BAND 26. Conducted Spurious (26765 ch\_5MHz\_QPSK\_RB 1\_0)

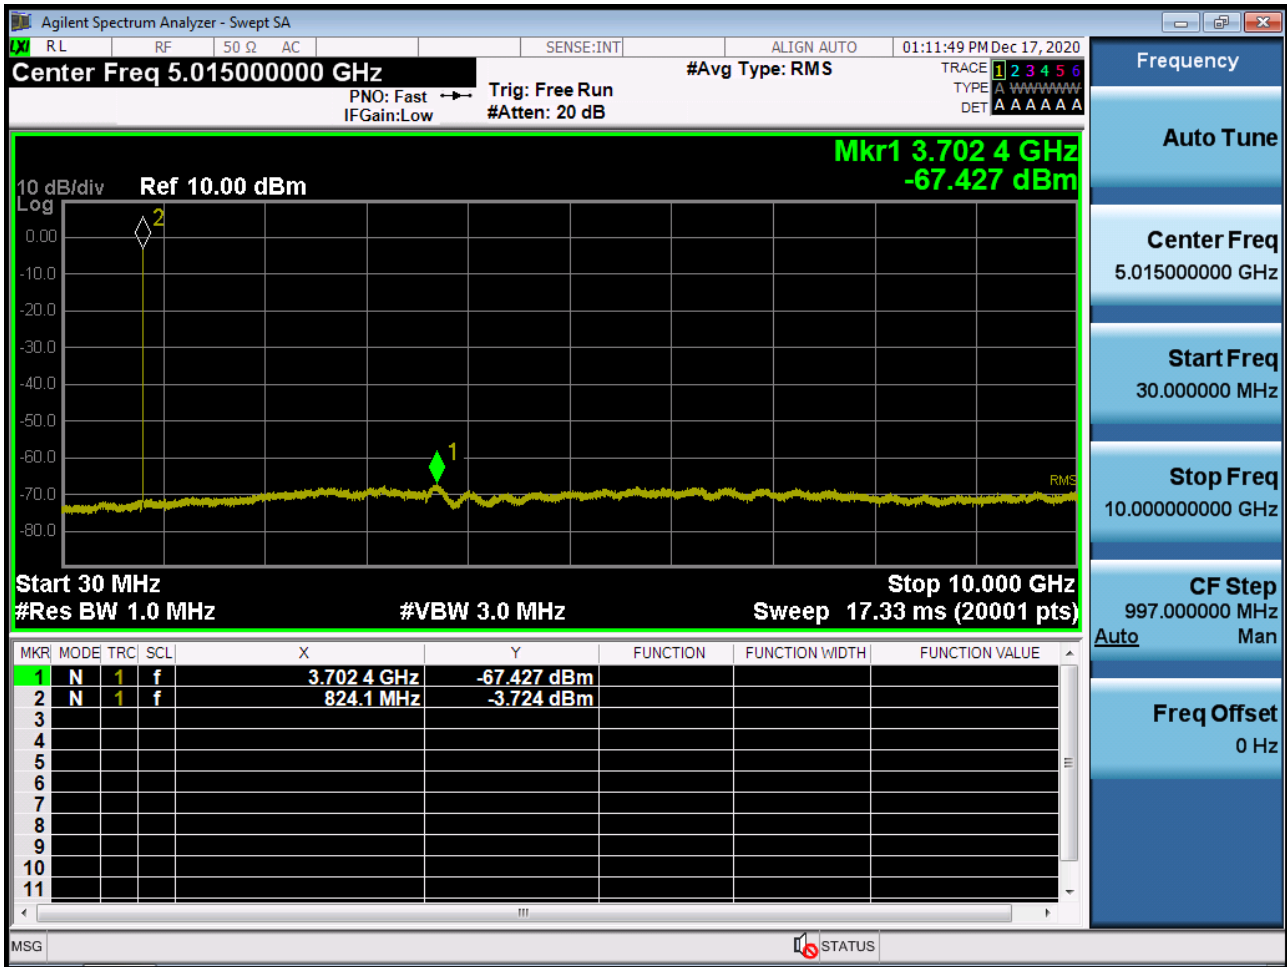

BAND 26. Conducted Spurious (26740 ch\_10MHz\_QPSK\_RB 1\_0)

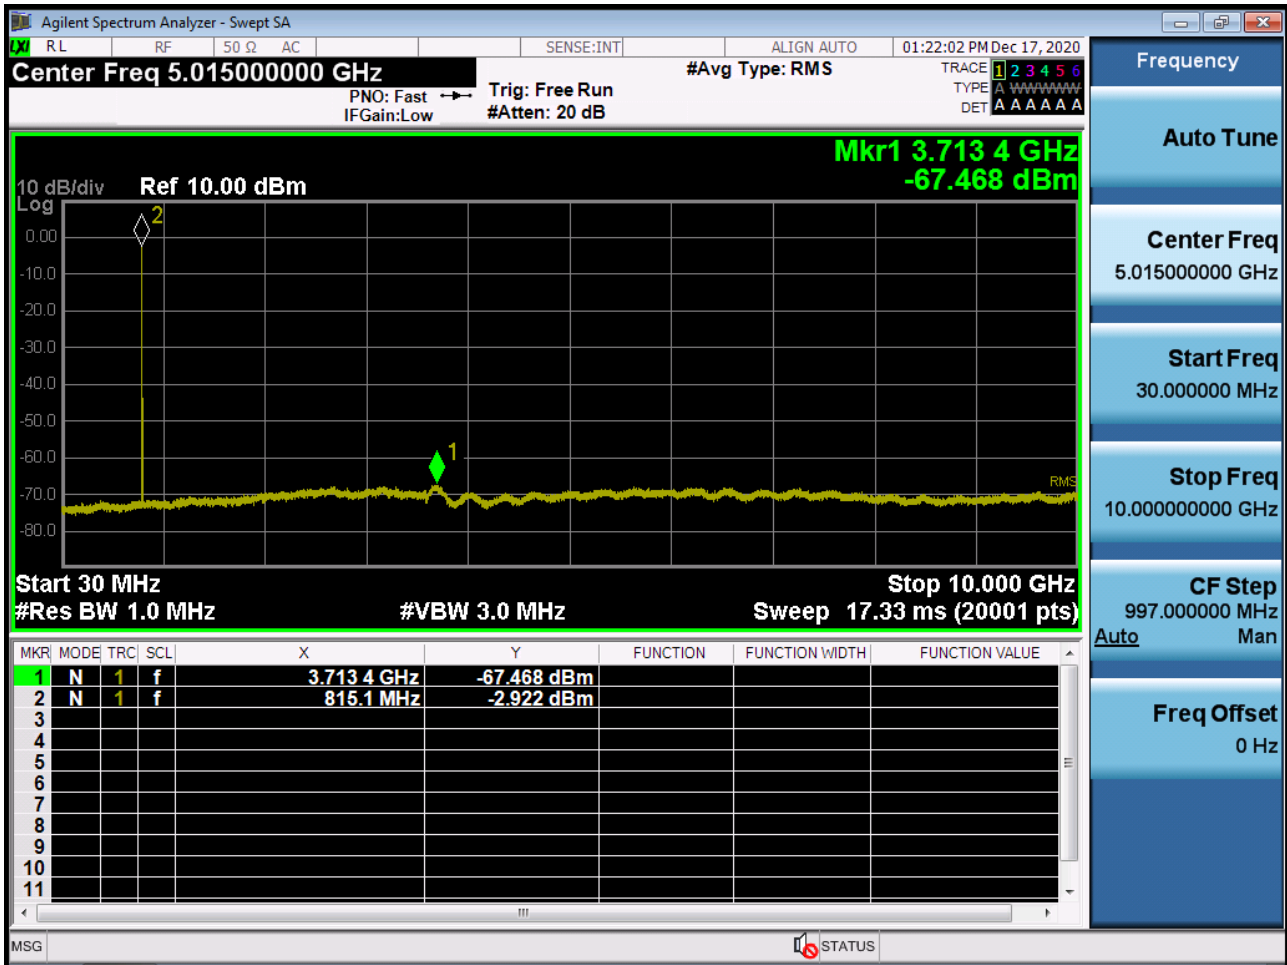


BAND 26. Conducted Spurious (26765 ch\_15MHz\_QPSK\_RB 1\_0)

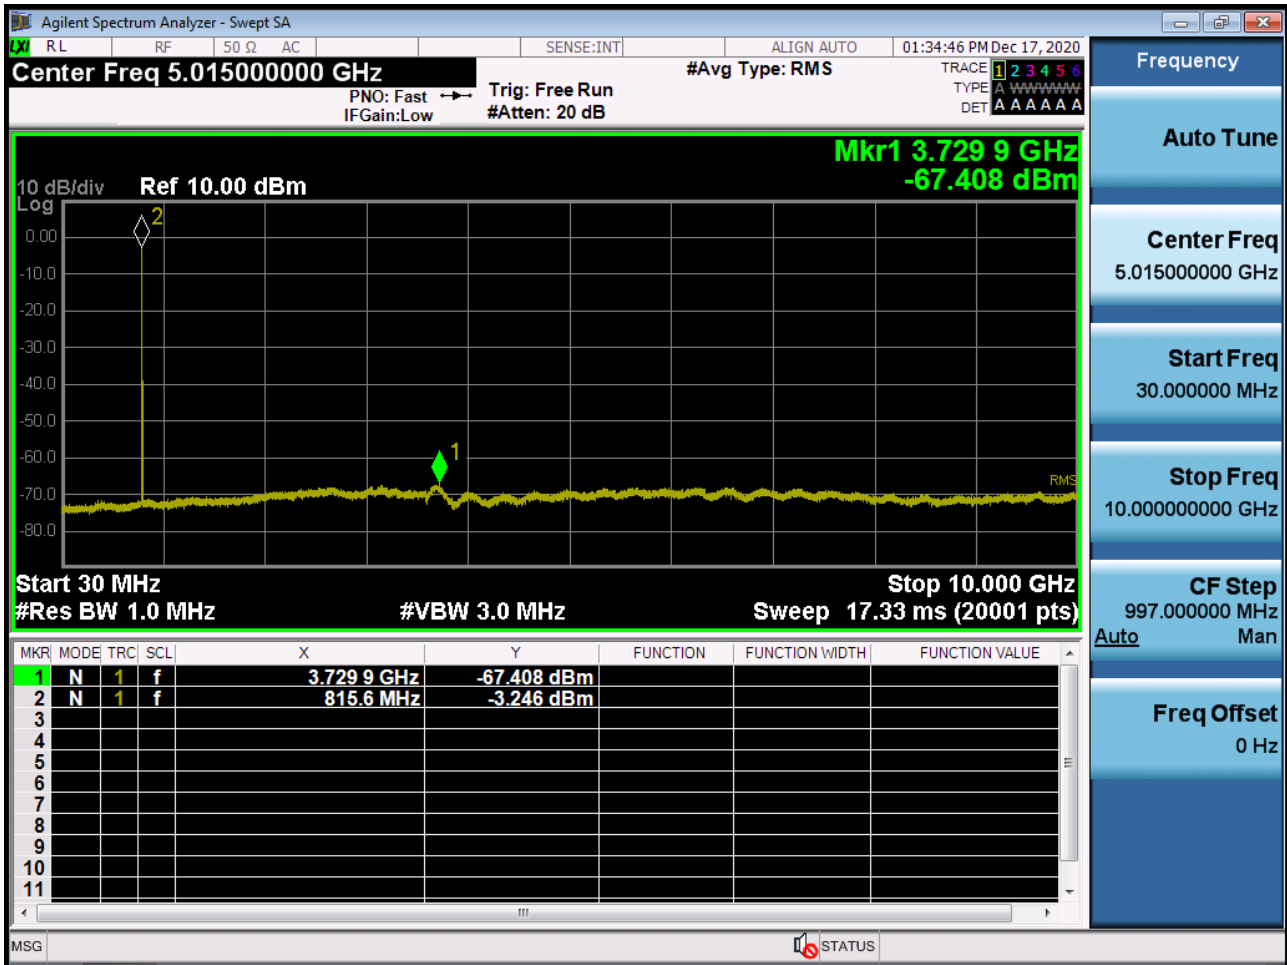


## 10. TEST PLOTS (STRADDLE CHANNEL)




BAND 26. Conducted Spurious (1.4MHz\_QPSK\_RB 1\_0)

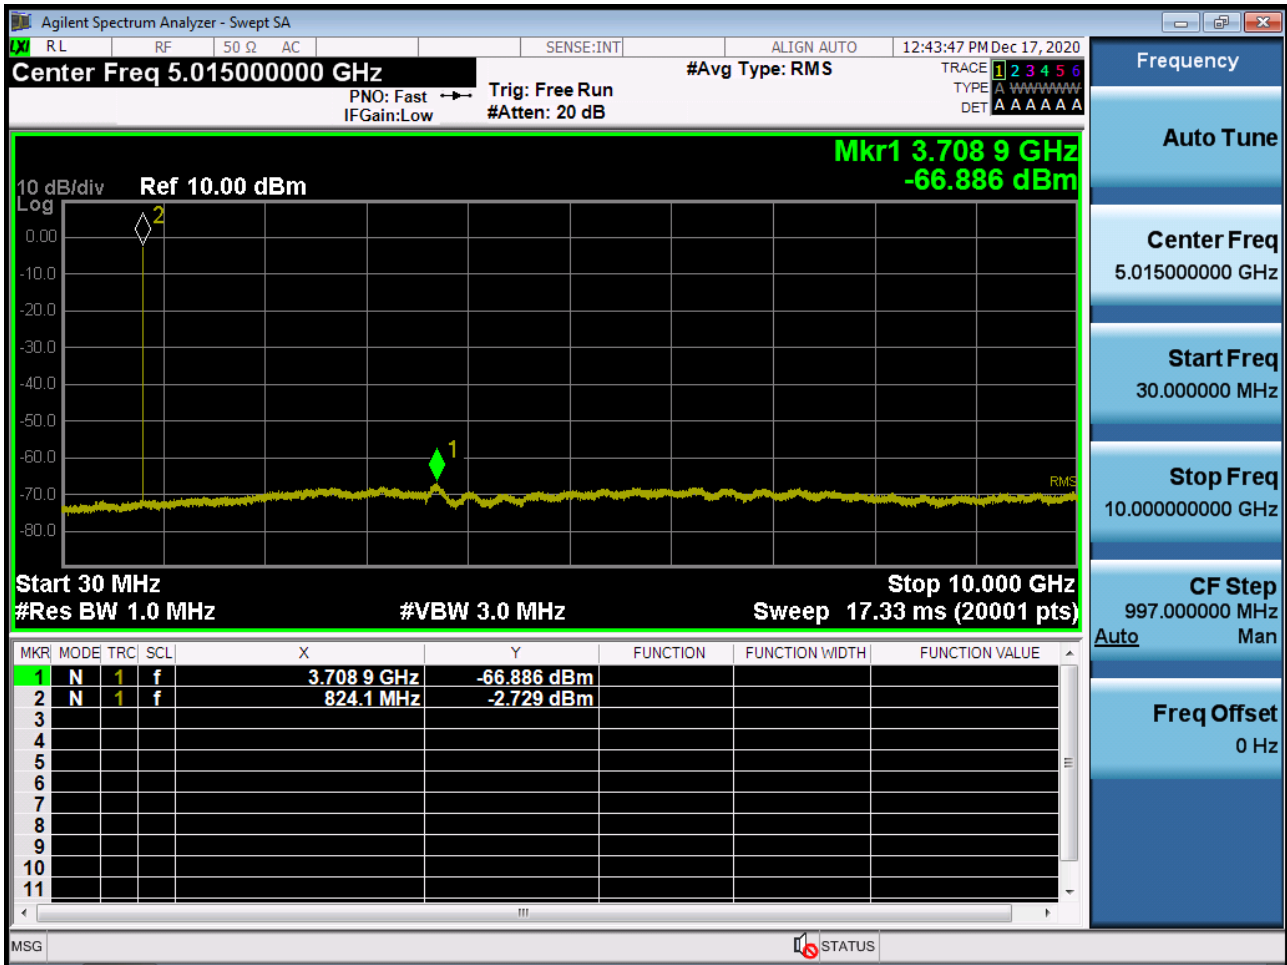


BAND 26. Conducted Spurious (3MHz\_QPSK\_RB 1\_0)

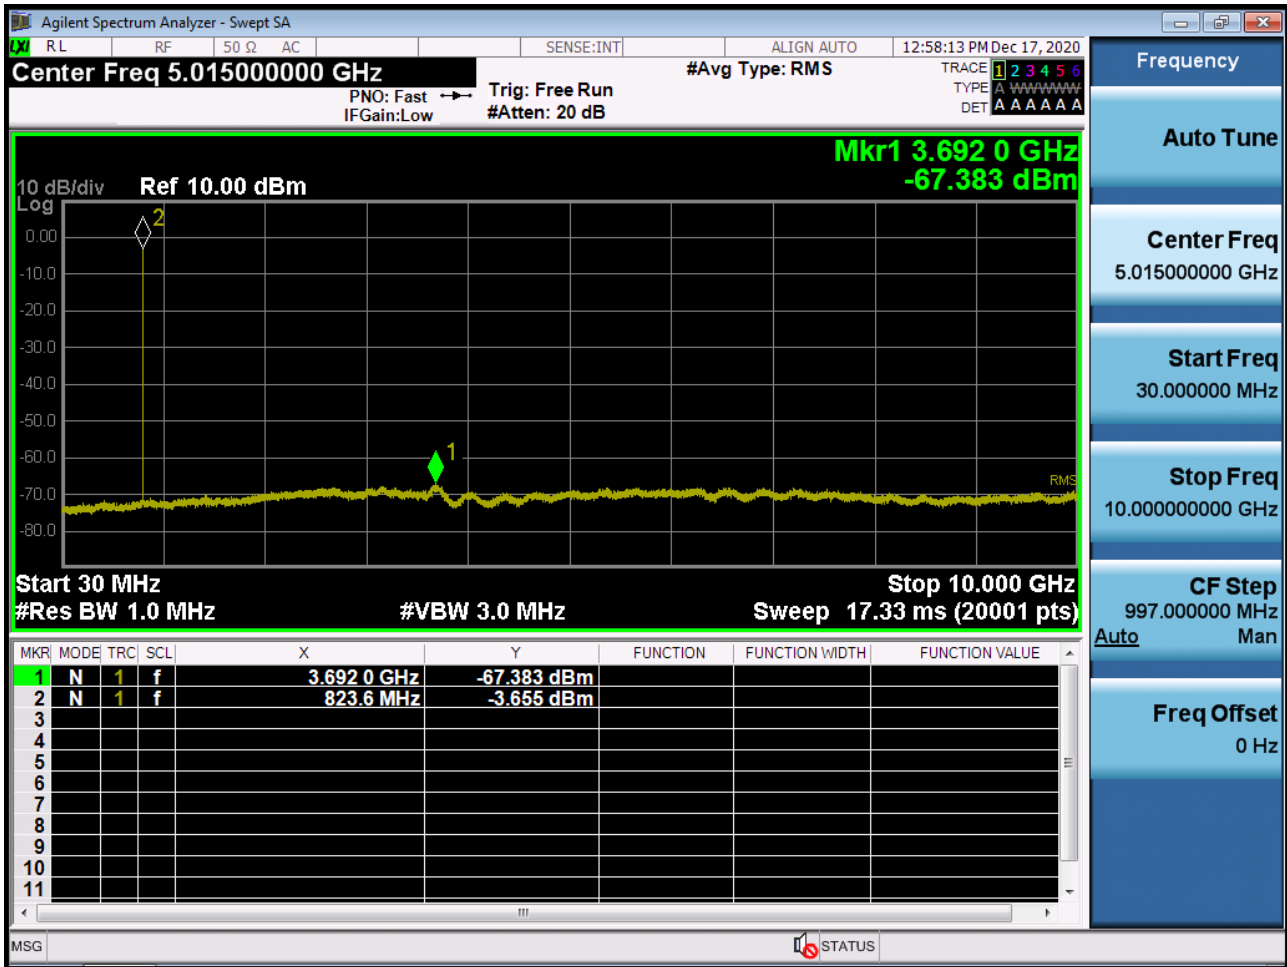


BAND 26. Conducted Spurious (5MHz\_QPSK\_RB 1\_0)

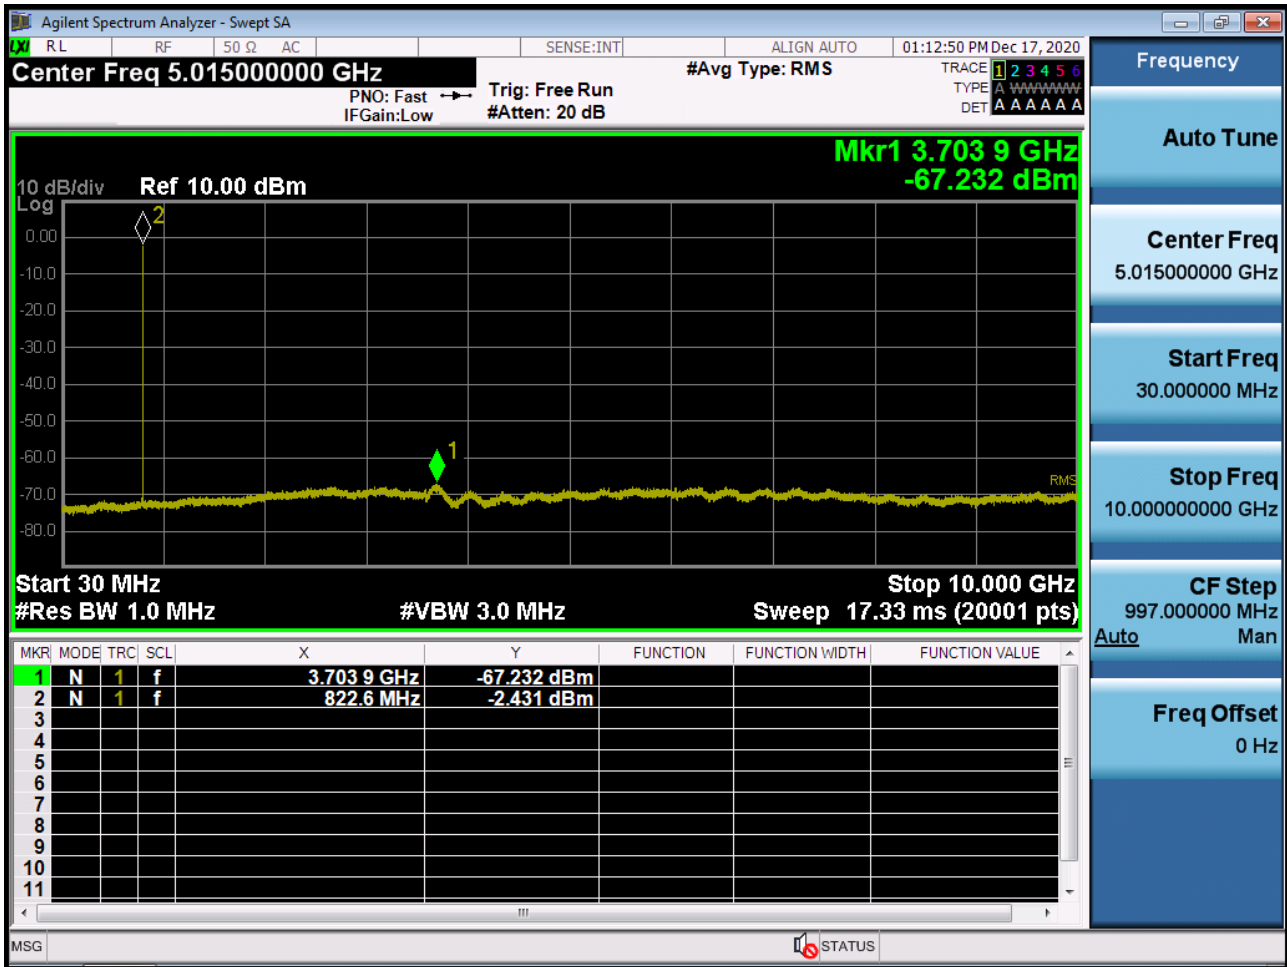


BAND 26. Conducted Spurious (10MHz\_QPSK\_RB 1\_0)

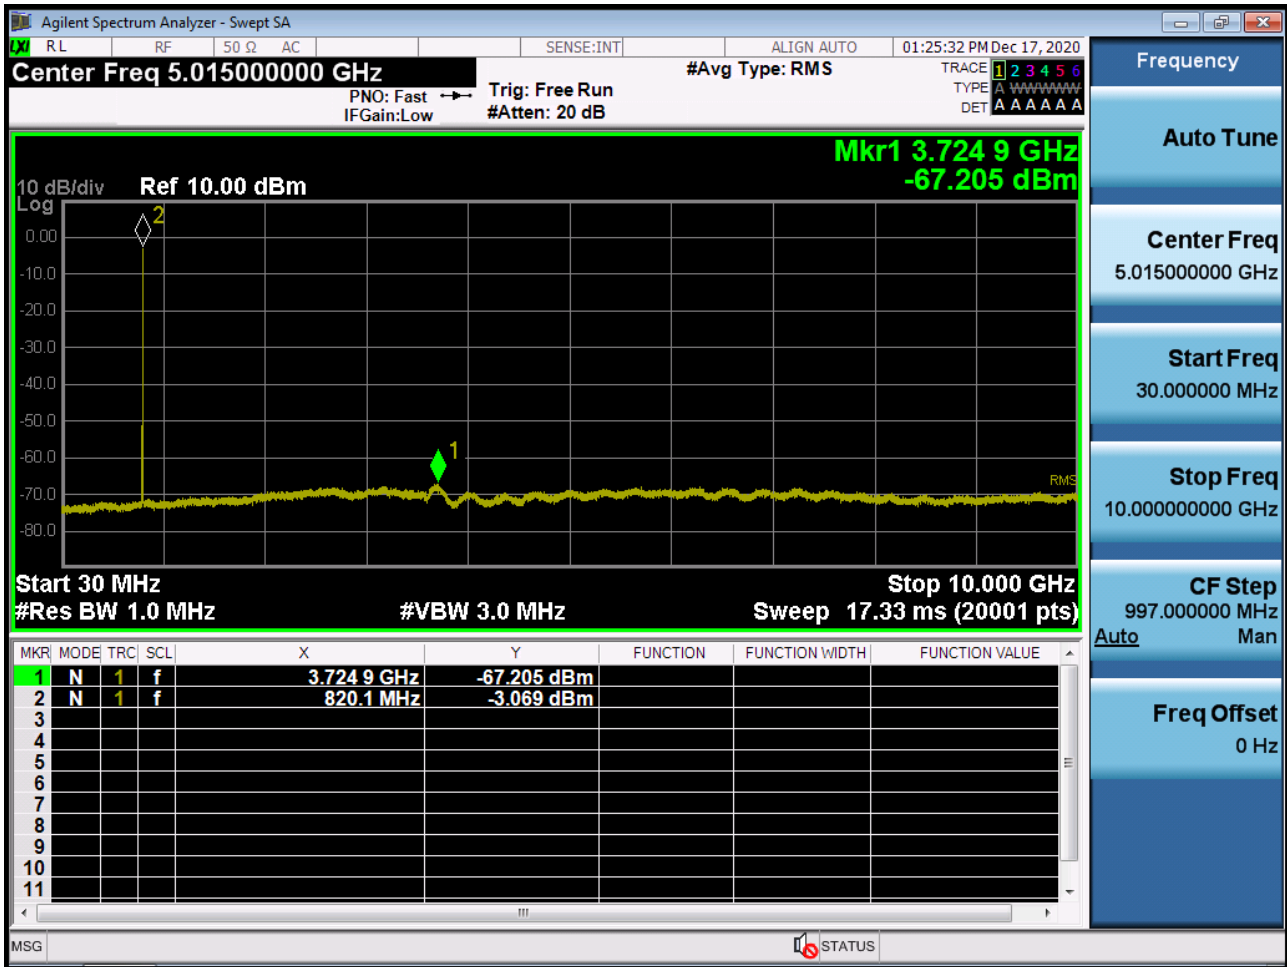


BAND 26. Channel Edge (1.4MHz\_QPSK\_RB 1\_0)

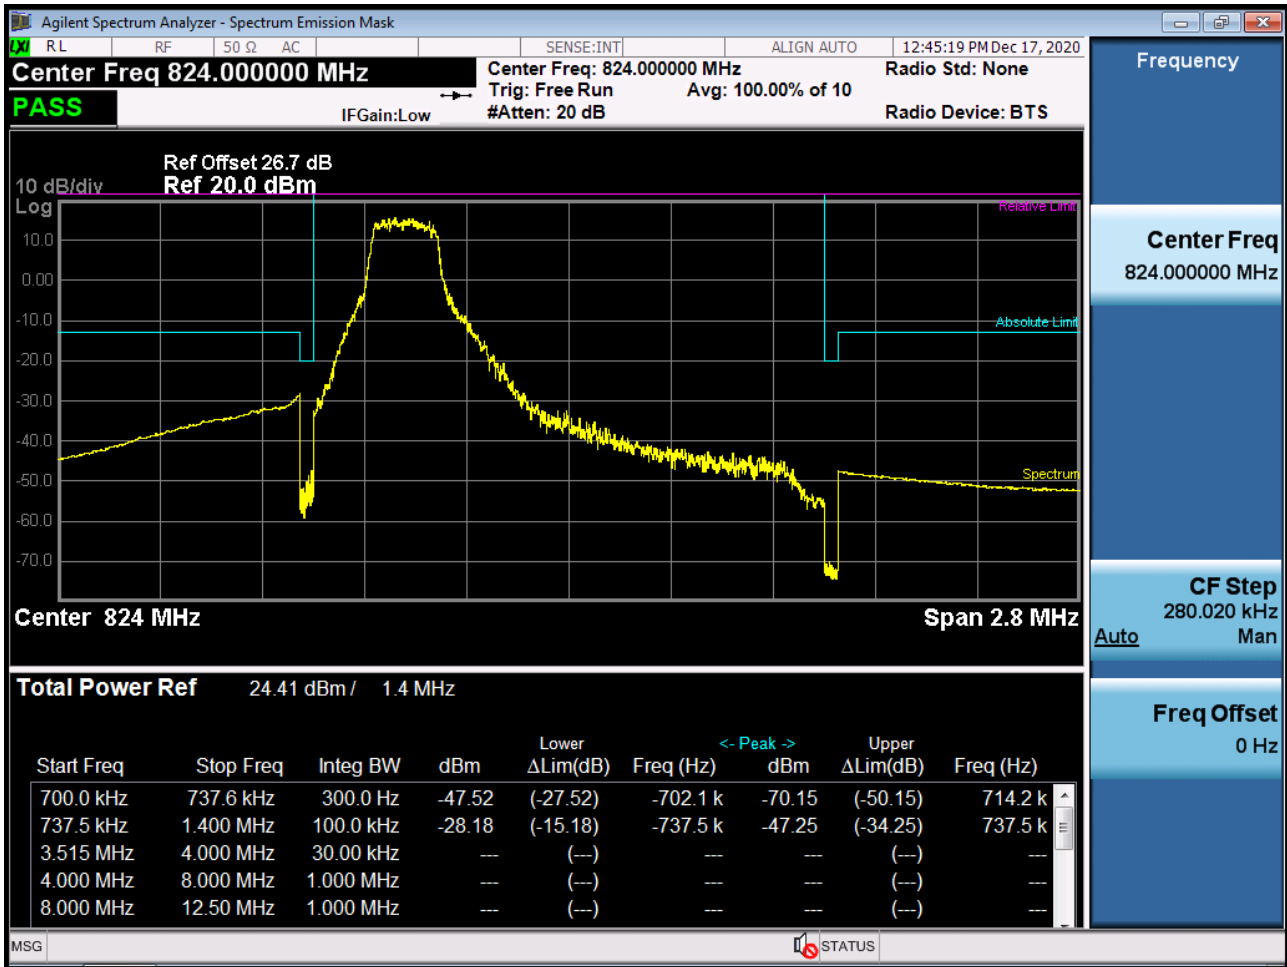


BAND 26. Channel Edge (1.4MHz\_QPSK\_RB 1\_5)

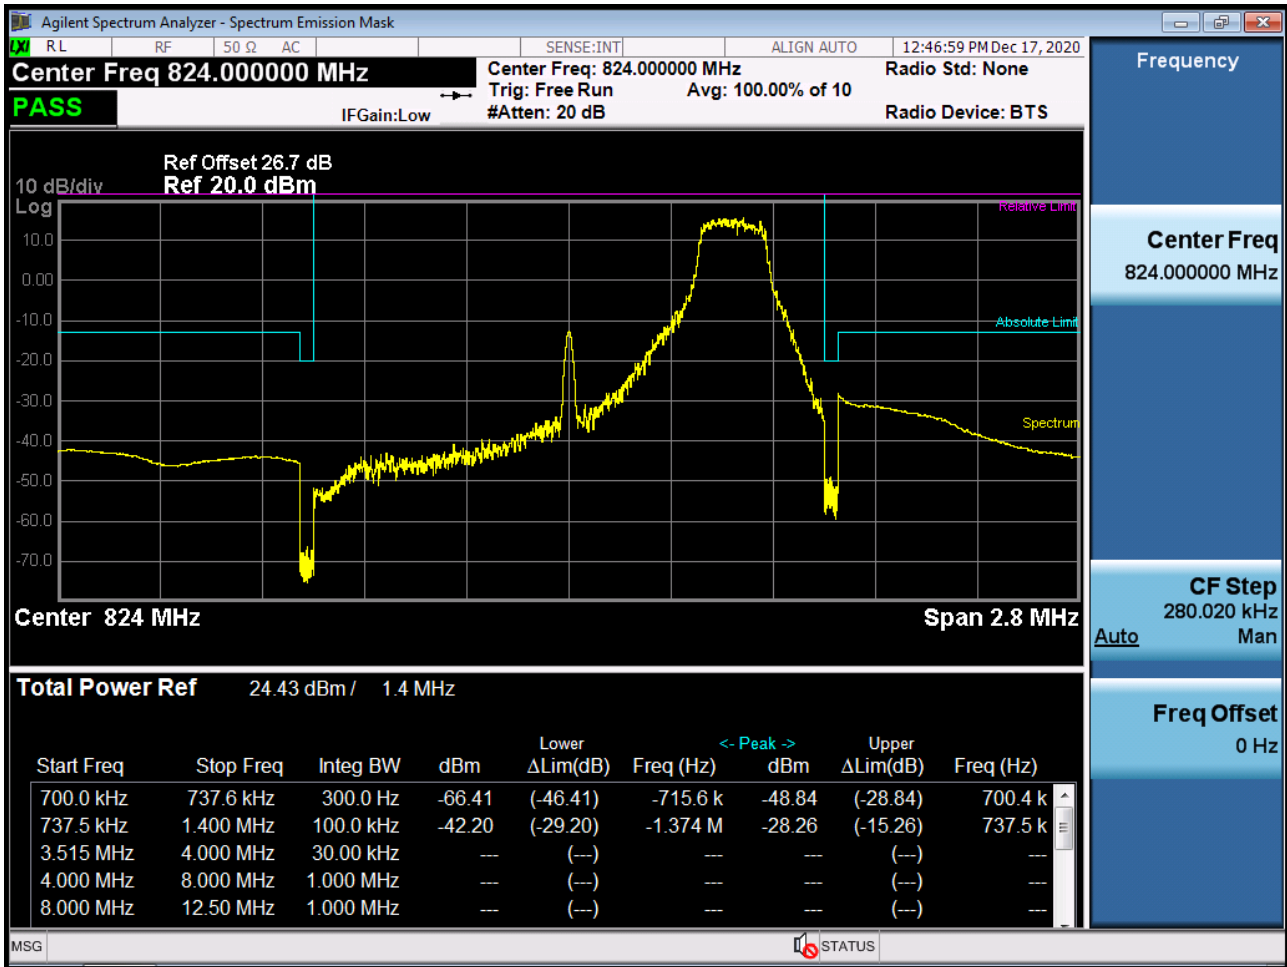

BAND 26. Channel Edge (1.4MHz\_QPSK\_Full RB)

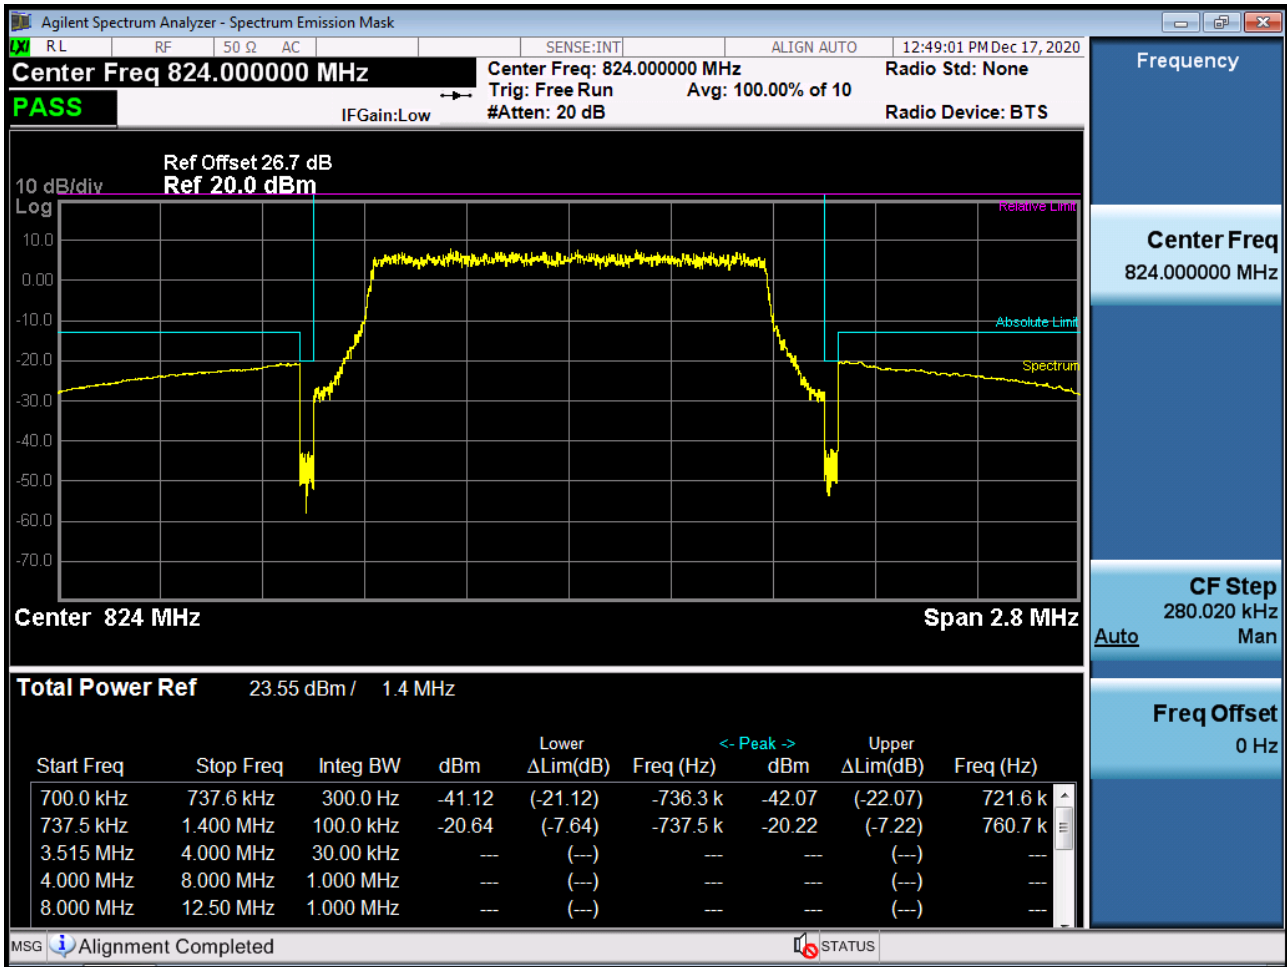


BAND 26. Channel Edge (3MHz\_QPSK\_RB 1\_0)

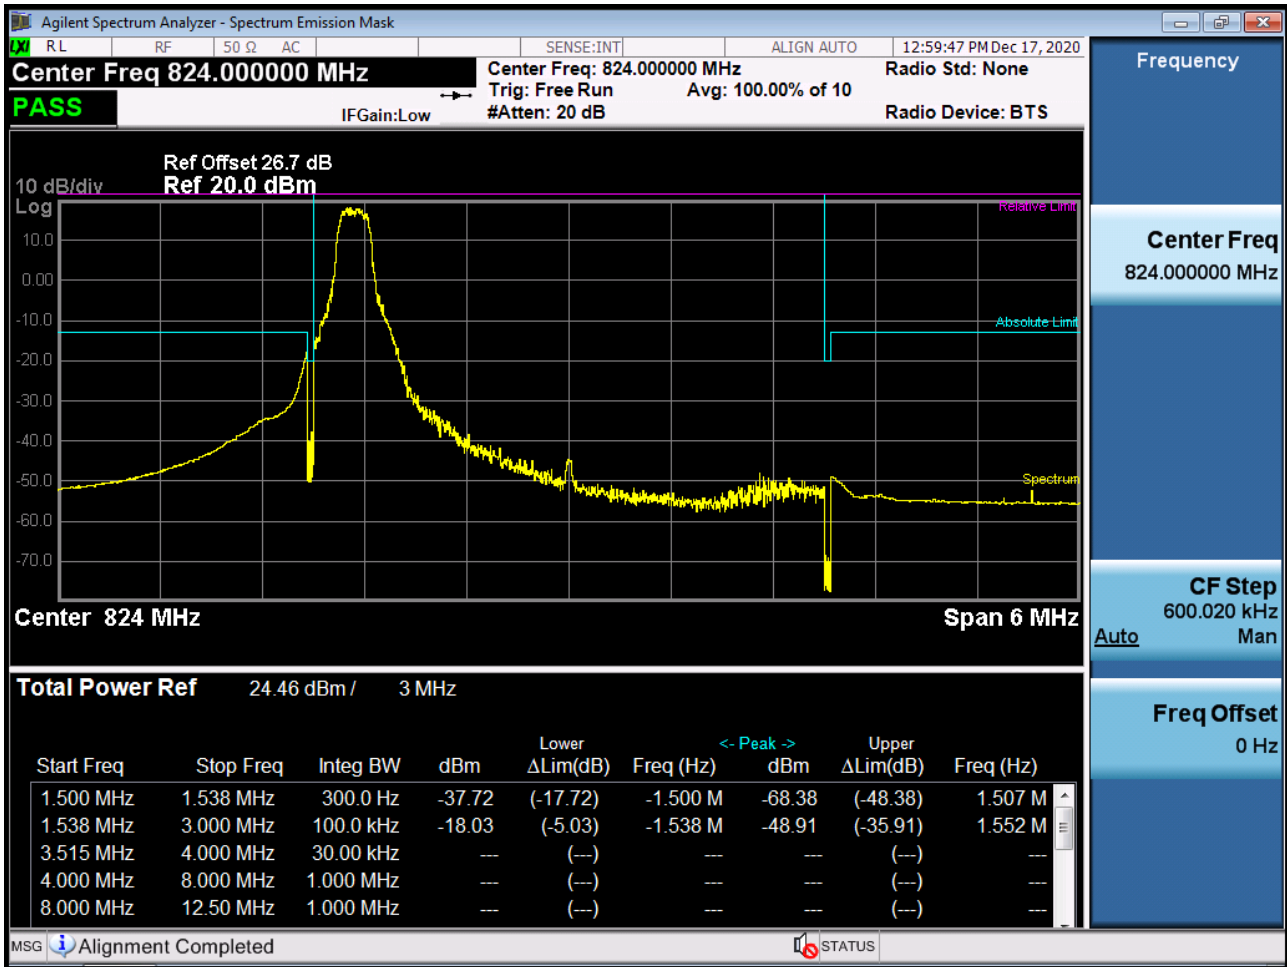





BAND 26. Channel Edge (3MHz\_QPSK\_RB 1\_14)

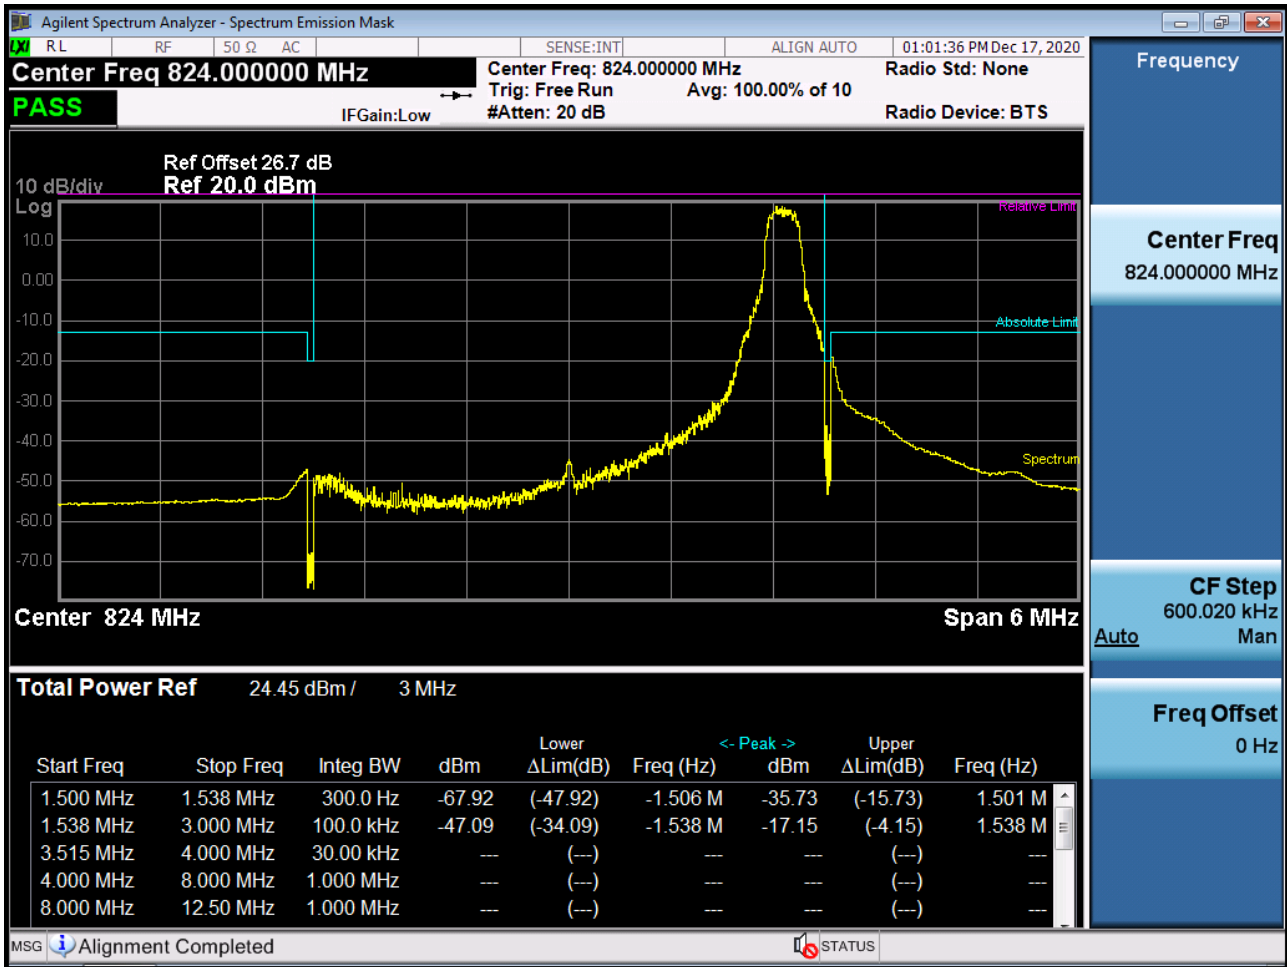


BAND 26. Channel Edge (3MHz\_QPSK\_Full RB)

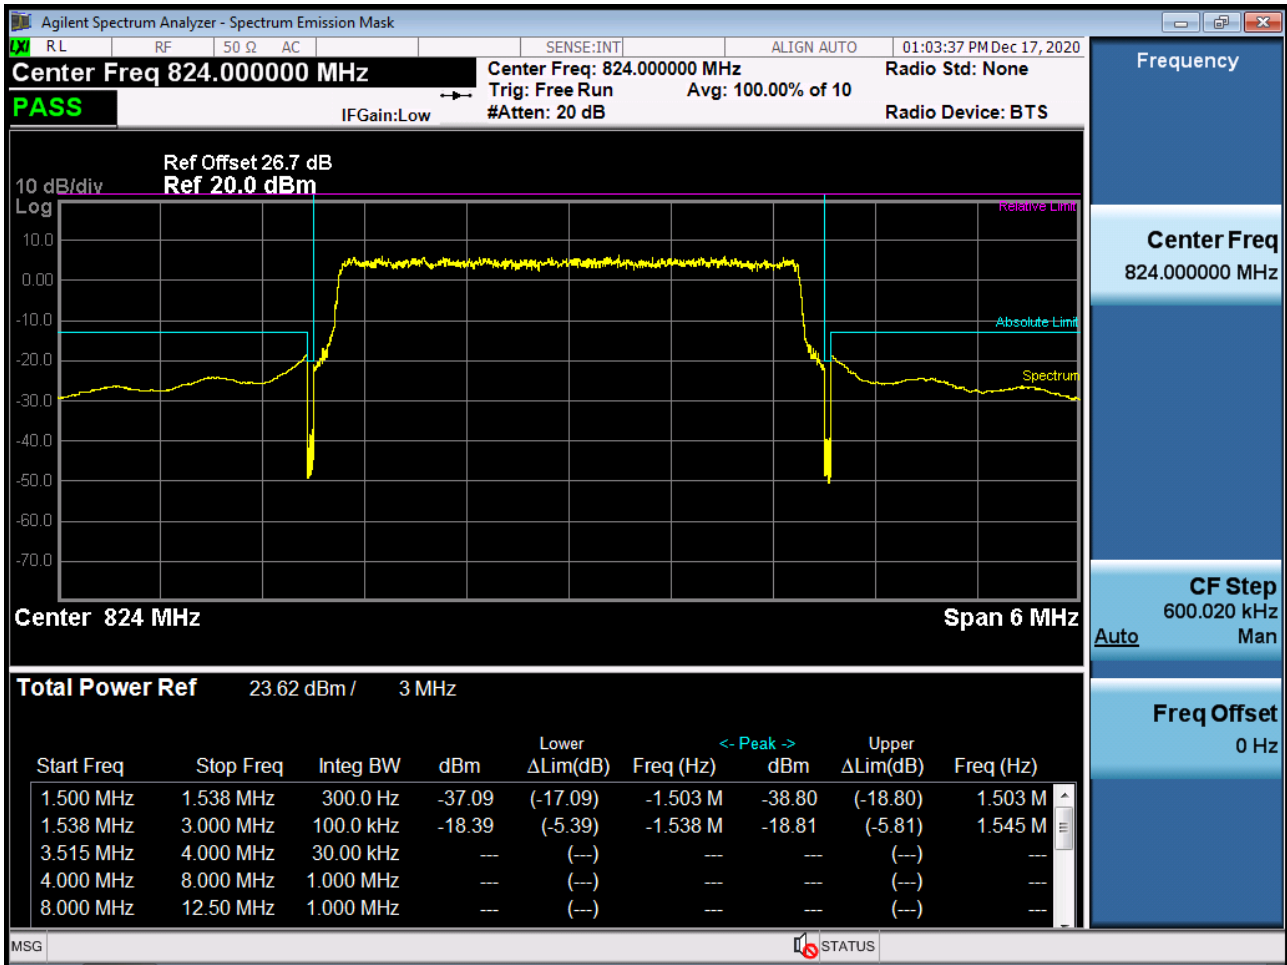


BAND 26. Channel Edge (5MHz\_QPSK\_RB 1\_0)

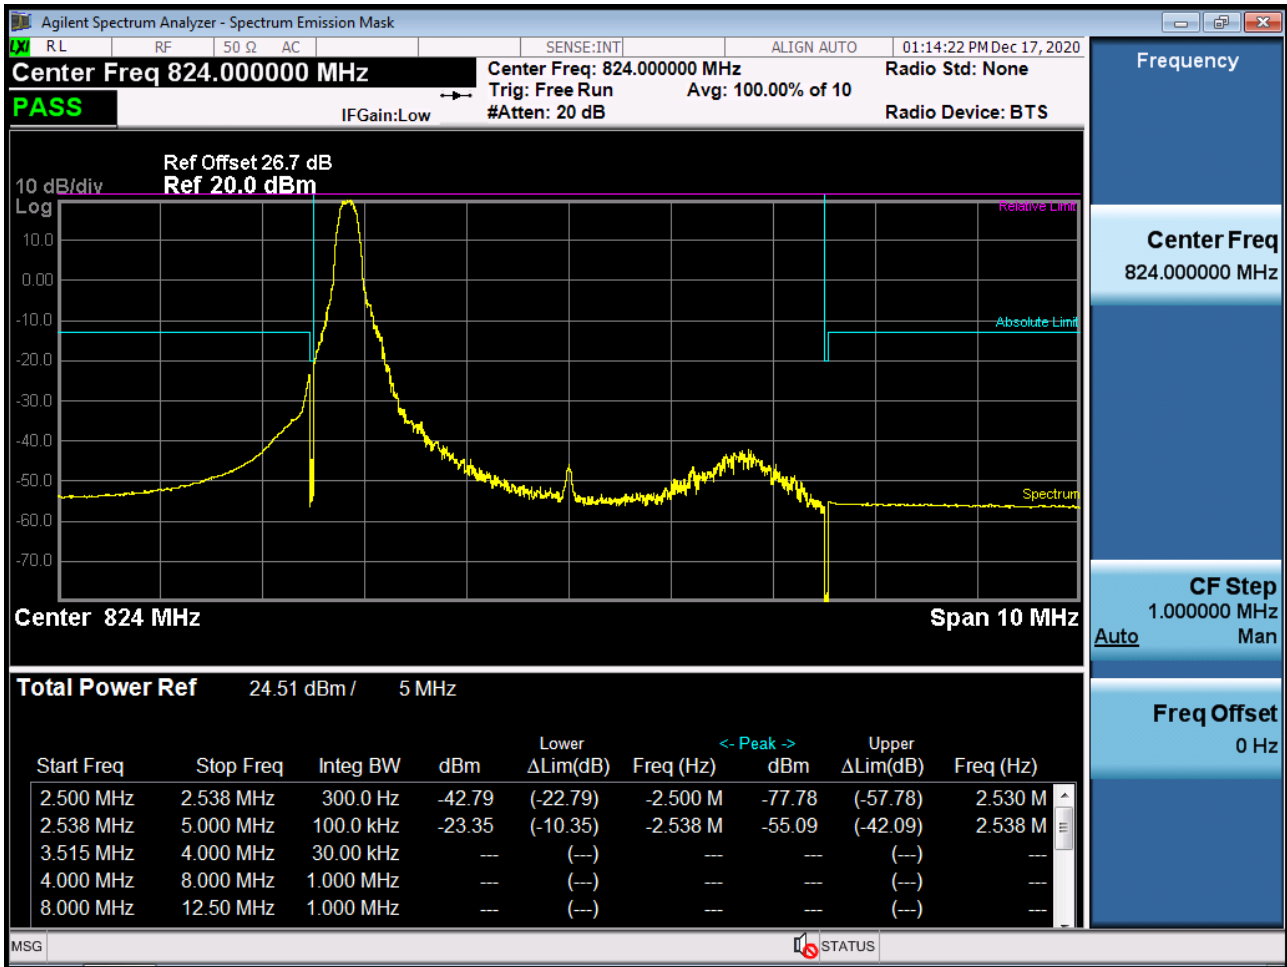


BAND 26. Channel Edge (5MHz\_QPSK\_RB 1\_24)

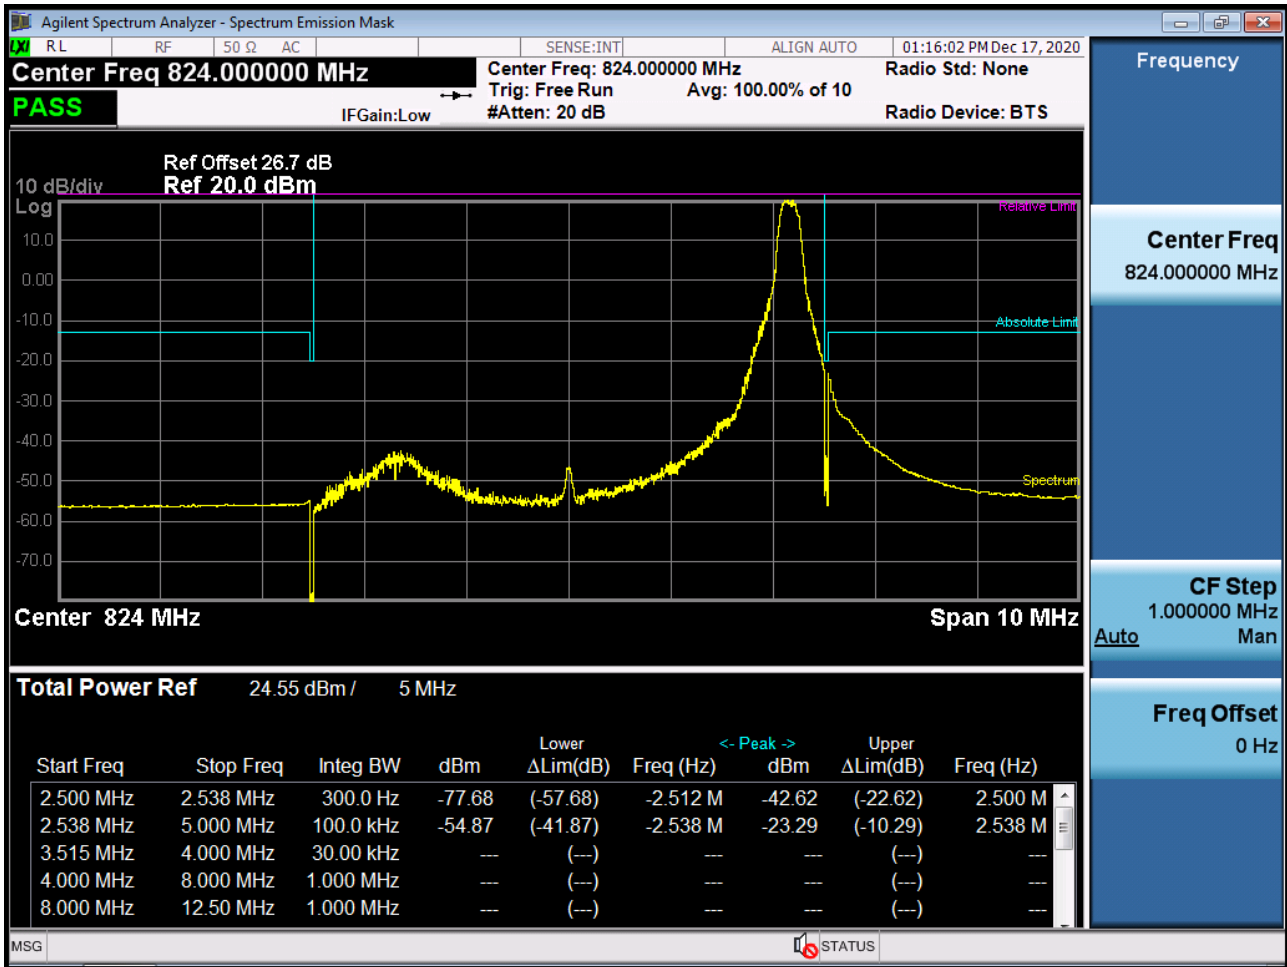


BAND 26. Channel Edge (5MHz\_QPSK\_Full RB)

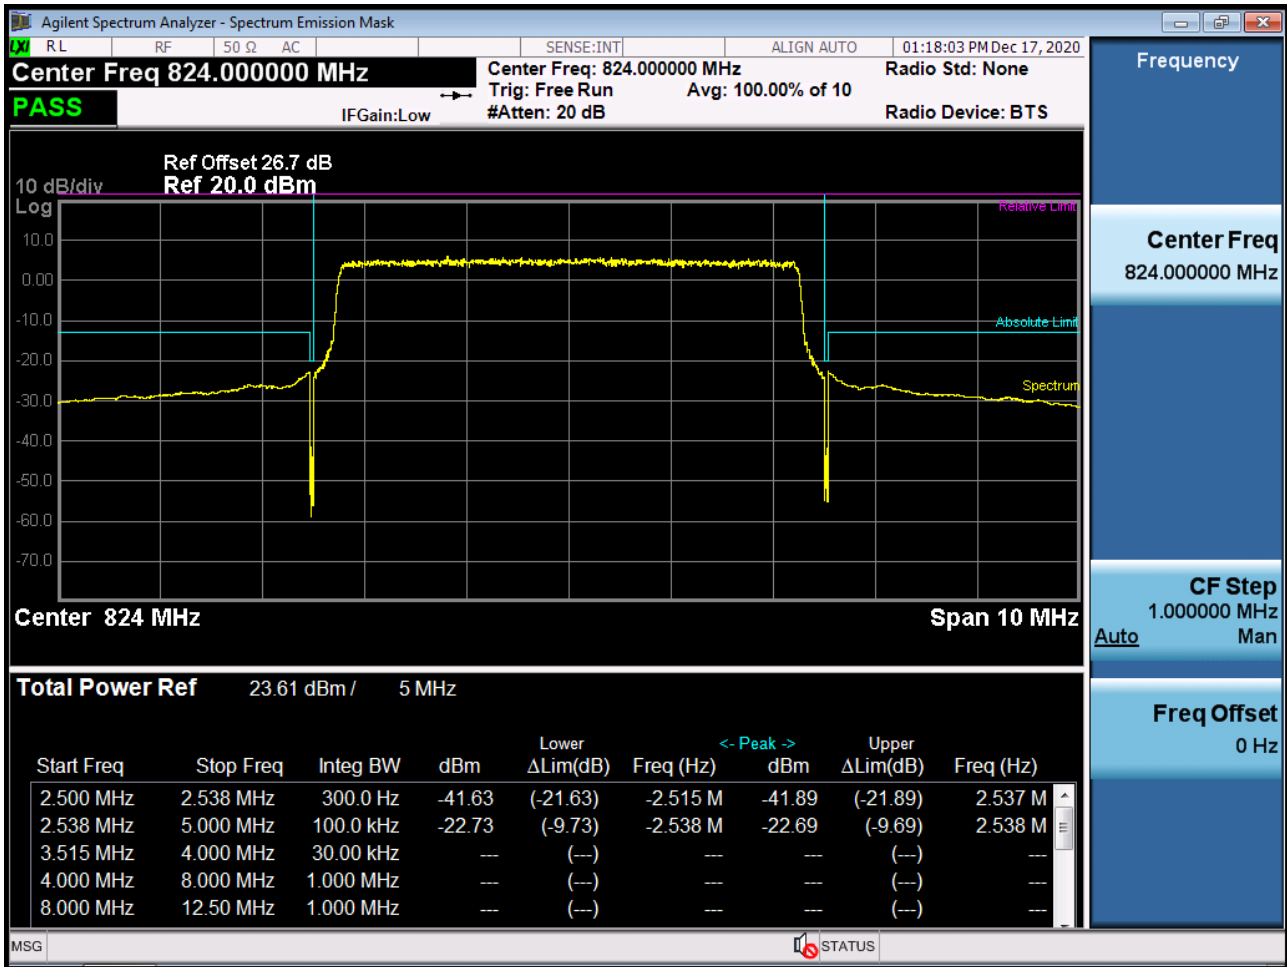


BAND 26. Channel Edge (10MHz\_QPSK\_RB 1\_0)

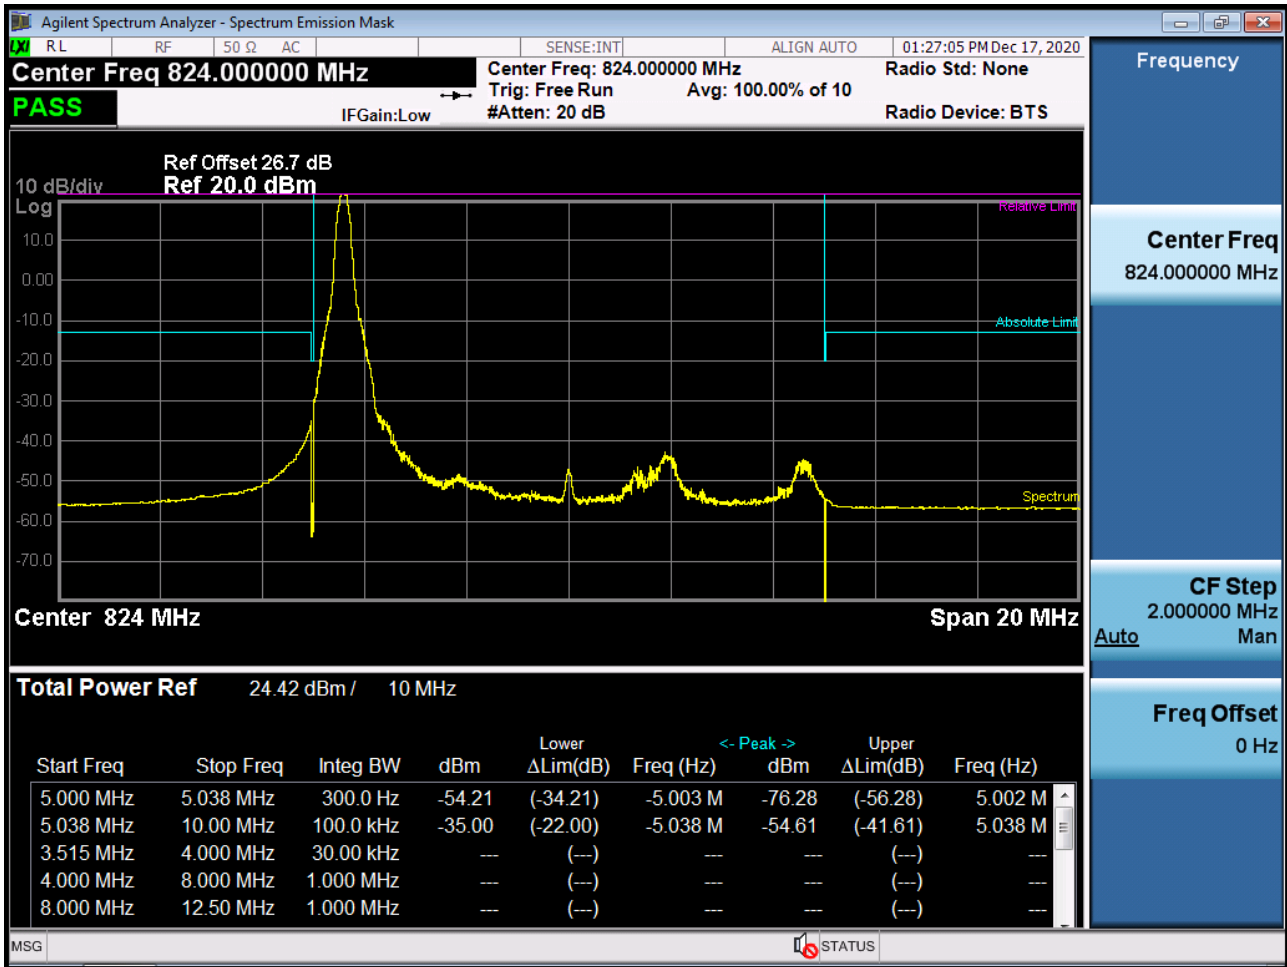

BAND 26. Channel Edge (10MHz\_QPSK\_RB 1\_49)

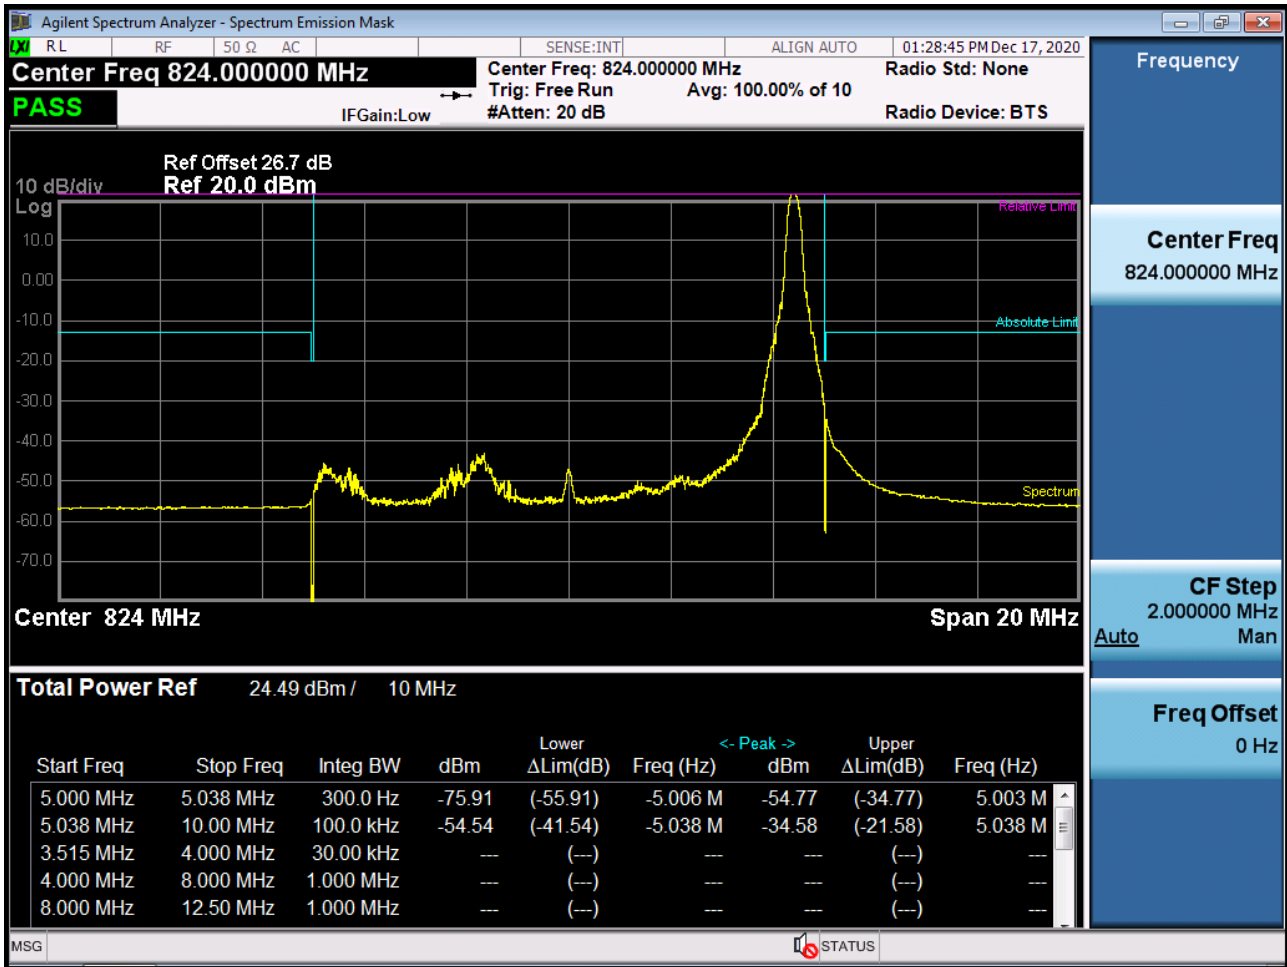


BAND 26. Channel Edge (10MHz\_QPSK\_Full RB)

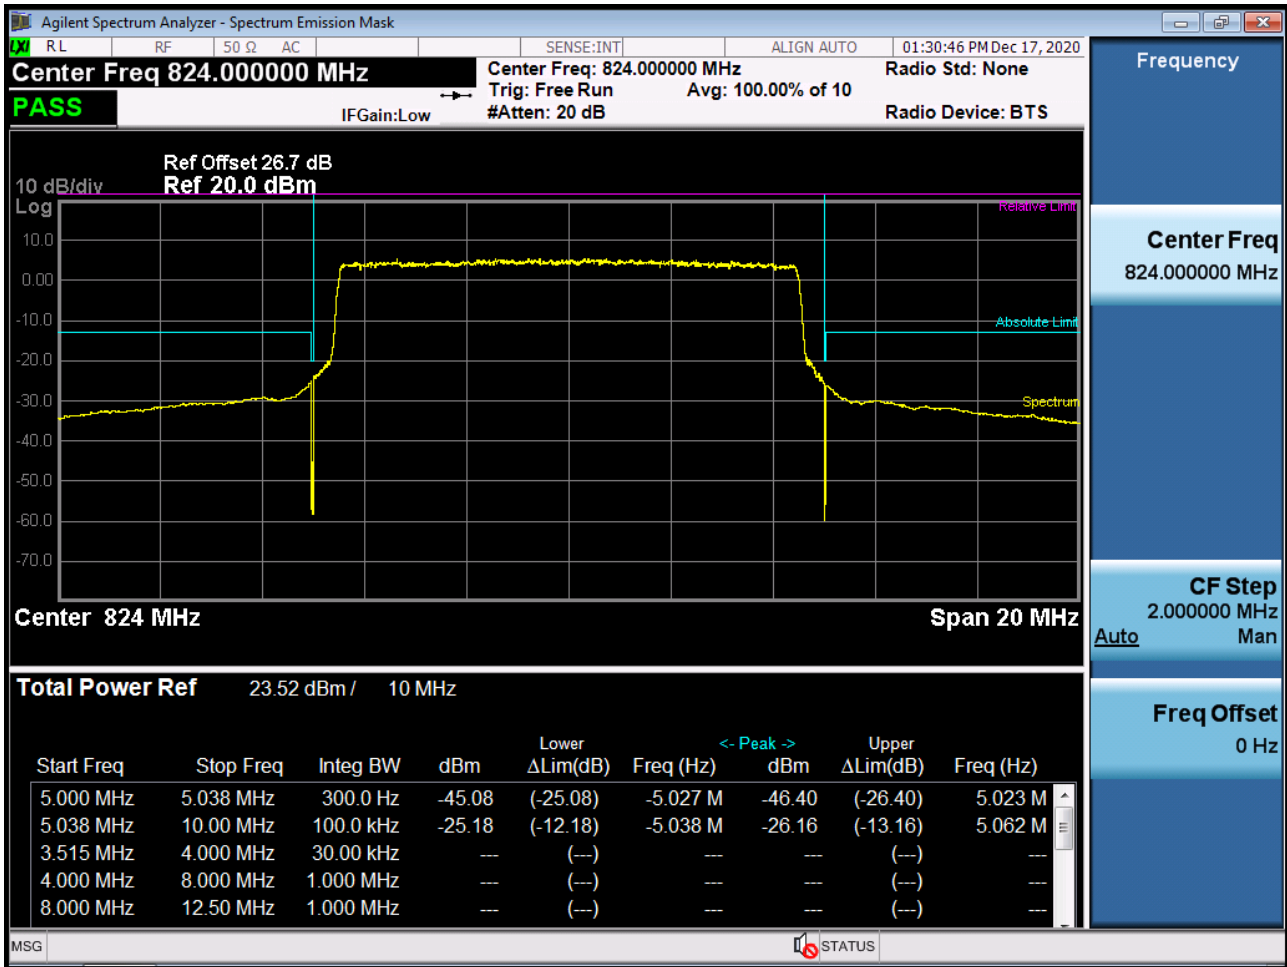




BAND 26. Band Edge (1.4MHz\_QPSK\_RB 1\_5)

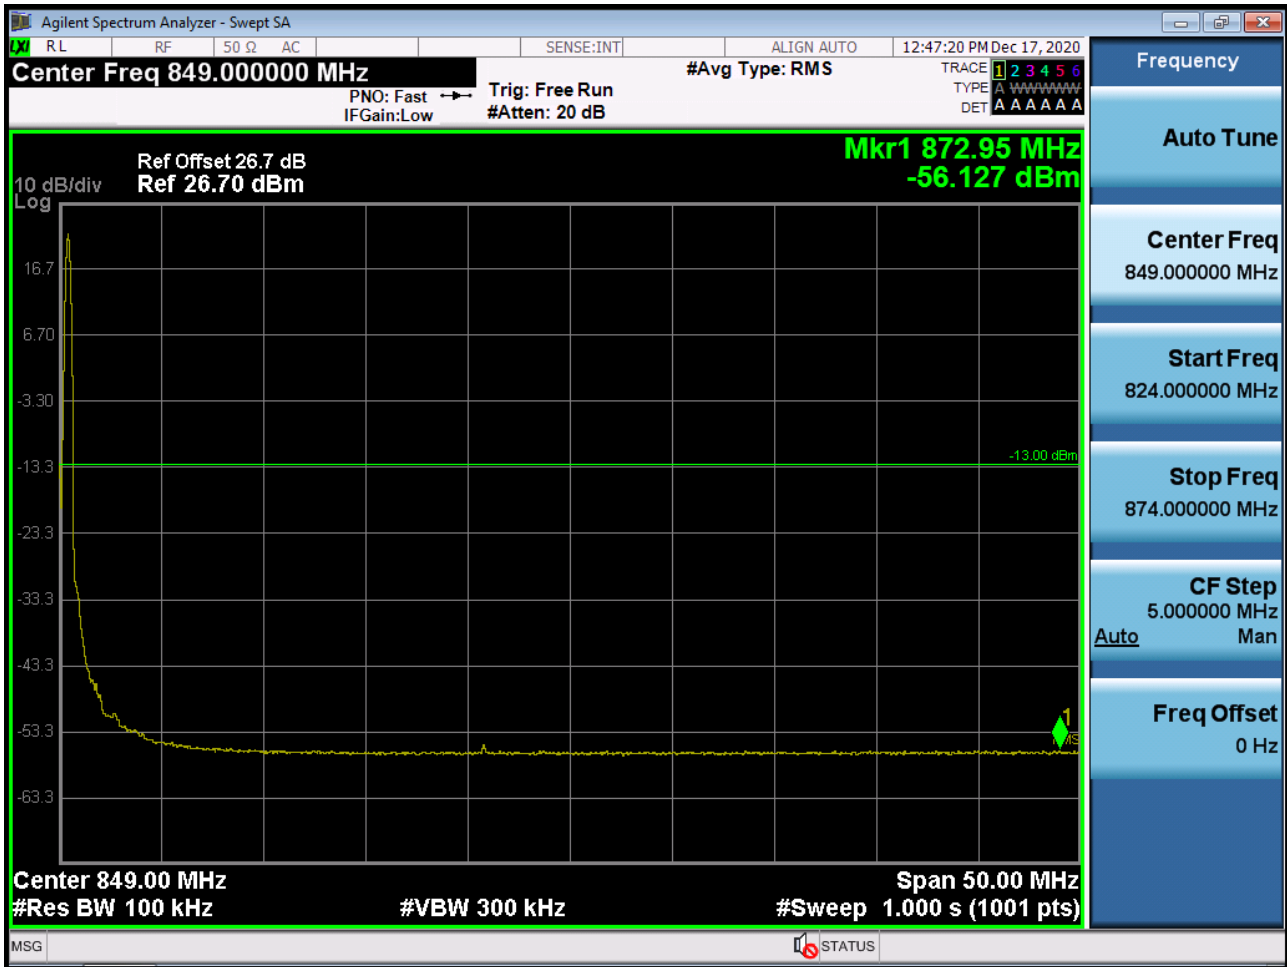

BAND 26. Band Edge (1.4MHz\_QPSK\_FullIRB)



BAND 26. Band Edge (3MHz\_QPSK\_RB 1\_14)

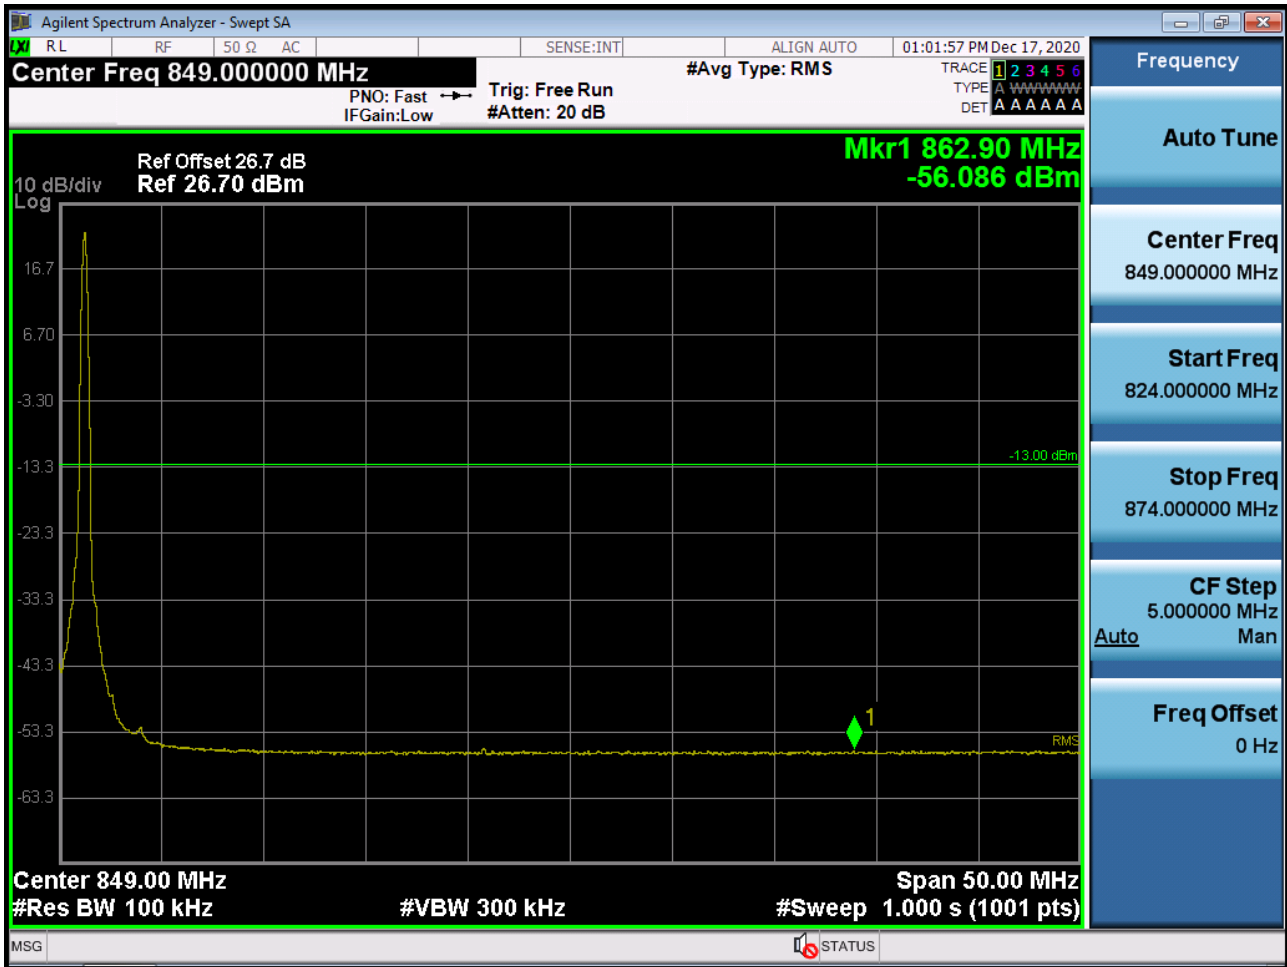

BAND 26. Band Edge (3MHz\_QPSK\_ Full RB)



BAND 26. Band Edge (5MHz\_QPSK\_RB 1\_24)



BAND 26. Band Edge (5MHz\_QPSK\_Full RB)



BAND 26. Band Edge (10MHz\_QPSK\_RB 1\_49)



BAND 26. Band Edge (10MHz\_QPSK\_ Full RB)





## 11 ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2101-FC053-P