



FCC 47 CFR PART 15 SUBPART E

UNII 802.11a/n/ac

CERTIFICATION TEST REPORT

FOR

CDMA/GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

MODEL NUMBER : SM-A8050

FCC ID: A3LSMA8050

REPORT NUMBER: 4788886237-E5V2

ISSUE DATE: APR 18, 2019

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED*

Testing
Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	04/16/19	Initial issue	Hoonpyo Lee
V2	04/18/19	Updated to address TCB'S question	Hoonpyo Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
1.1. INTRODUCTION OF TEST DATA REUSE.....	8
1.2. DIFFERENCE.....	8
1.3. SPOT CHECK VERIFICATION DATA	8
1.4. REFERENCE DETAIL	9
2. TEST METHODOLOGY	10
3. FACILITIES AND ACCREDITATION	10
4. CALIBRATION AND UNCERTAINTY	10
4.1. MEASURING INSTRUMENT CALIBRATION	10
4.2. SAMPLE CALCULATION	10
4.3. MEASUREMENT UNCERTAINTY.....	11
5. EQUIPMENT UNDER TEST	12
5.1. DESCRIPTION OF EUT	12
5.2. MAXIMUM OUTPUT POWER.....	13
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	13
5.4. List of test reduction and modes covering other modes:	14
5.5. WORST-CASE CONFIGURATION AND MODE.....	16
5.6. DESCRIPTION OF TEST SETUP.....	17
6. TEST AND MEASUREMENT EQUIPMENT	19
7. SUMMARY TABLE	20
8. MEASUREMENT METHODS	21
9. REFERENCE MEASUREMENTS RESULTS	22
9.1. ON TIME AND DUTY CYCLE RESULTS.....	22
9.2. DUTY CYCLE PLOTS	23
9.3. 26 dB BANDWIDTH.....	25
9.3.1. 802.11a MODE IN THE 5.2 GHz BAND.....	26
9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	26
9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	26
9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	26
9.3.5. 802.11a MODE IN THE 5.3 GHz BAND.....	27
9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	27
9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND	27
9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	27

9.3.9.	802.11a MODE IN THE 5.5 GHz BAND	28
9.3.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	28
9.3.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	28
9.3.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	29
9.3.13.	802.11a MODE IN THE 5.8 GHz BAND	29
9.3.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	29
9.3.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	29
9.3.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	30
9.3.17.	26 dB BANDWIDTH PLOTS	31
9.4.	99% BANDWIDTH	44
9.4.1.	802.11a MODE IN THE 5.2 GHz BAND	45
9.4.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	45
9.4.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	45
9.4.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	45
9.4.5.	802.11a MODE IN THE 5.3 GHz BAND	46
9.4.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	46
9.4.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	46
9.4.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	46
9.4.9.	802.11a MODE IN THE 5.5 GHz BAND	47
9.4.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	47
9.4.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	47
9.4.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	48
9.4.13.	802.11a MODE IN THE 5.8 GHz BAND	48
9.4.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	48
9.4.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	48
9.4.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	49
9.4.17.	99% BANDWIDTH PLOTS	50
10.	ANTENNA PORT TEST RESULTS	63
10.1.	6 dB BANDWIDTH	63
10.1.1.	802.11a MODE IN THE 5.8 GHz BAND	64
10.1.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	64
10.1.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	64
10.1.4.	802.11n VHT80 MODE IN THE 5.8 GHz BAND	64
10.1.5.	6 dB BANDWIDTH PLOTS	65
10.2.	OUTPUT POWER AND PPSD	69
10.2.1.	802.11a MODE IN THE 5.2 GHz BAND	70
10.2.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	71
10.2.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	72
10.2.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	73
10.2.5.	802.11a MODE IN THE 5.3 GHz BAND	74
10.2.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	75
10.2.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	76
10.2.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	77
10.2.9.	802.11a MODE IN THE 5.5 GHz BAND	78
10.2.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	79
10.2.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	80
10.2.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	81
10.2.13.	802.11a MODE IN THE 5.8 GHz BAND	82

10.2.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	83
10.2.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	84
10.2.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	85
10.2.17.	802.11a MODE IN THE STRADDLE CHANNEL	86
10.2.18.	802.11n HT20 MODE IN THE STRADDLE CHANNEL	87
10.2.19.	802.11n HT40 MODE IN THE STRADDLE CHANNEL	88
10.2.20.	802.11ac VHT80 MODE IN THE STRADDLE CHANNEL	89
10.2.21.	OUTPUT POWER AND PPSD PLOTS	90
11.	TRANSMITTER ABOVE 1 GHz.....	107
11.1.	5.2 GHz.....	110
11.1.1.	TX Above 1GHz 802.11a 2Tx CDD MODE IN THE 5.2GHz BAND	110
11.1.2.	TX Above 1GHz 802.11a 1Tx ANT1 IN THE 5.2GHz BAND	118
11.1.3.	TX Above 1GHz 802.11a 1Tx ANT2 IN THE 5.2GHz BAND	126
11.1.4.	TX Above 1GHz 802.11n HT20 2Tx CDD MODE IN THE 5.2GHz BAND.....	134
11.1.5.	TX Above 1GHz 802.11n HT20 1Tx ANT1 IN THE 5.2GHz BAND.....	142
11.1.6.	TX Above 1GHz 802.11n HT20 1Tx ANT2 IN THE 5.2GHz BAND.....	150
11.1.7.	TX Above 1GHz 802.11n HT40 2Tx CDD MODE IN THE 5.2GHz BAND.....	158
11.1.8.	TX Above 1GHz 802.11n HT40 1Tx ANT1 IN THE 5.2GHz BAND.....	164
11.1.9.	TX Above 1GHz 802.11n HT40 1Tx ANT2 IN THE 5.2GHz BAND.....	170
11.1.10.	TX ABOVE 1GHz 802.11ac VHT80 2Tx CDD MODE IN THE 5.2GHz BAND.....	176
11.1.11.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT1 MODE IN THE 5.2GHz BAND	180
11.1.12.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT2 IN THE 5.2GHz BAND	184
11.2.	5.3 GHz.....	188
11.2.1.	TX ABOVE 1 GHz 802.11a 2Tx CDD MODE IN THE 5.3 GHz BAND	188
11.2.2.	TX ABOVE 1 GHz 802.11a 1Tx ANT1 IN THE 5.3 GHz BAND	196
11.2.3.	TX ABOVE 1 GHz 802.11a 1Tx ANT2 IN THE 5.3 GHz BAND	204
11.2.4.	TX ABOVE 1GHz 802.11n HT20 2Tx CDD MODE IN THE 5.3GHz BAND	212
11.2.5.	TX ABOVE 1GHz 802.11n HT20 1Tx ANT1 IN THE 5.3GHz BAND	220
11.2.6.	TX ABOVE 1GHz 802.11n HT20 1Tx ANT2 IN THE 5.3GHz BAND	228
11.2.7.	TX ABOVE 1GHz 802.11n HT40 2Tx CDD MODE IN THE 5.3GHz BAND	236
11.2.8.	TX ABOVE 1GHz 802.11n HT40 1Tx ANT1 IN THE 5.3GHz BAND	242
11.2.9.	TX ABOVE 1GHz 802.11n HT40 1Tx ANT2 MODE IN THE 5.3GHz BAND	248
11.2.10.	TX ABOVE 1GHz 802.11ac VHT80 2Tx CDD MODE IN THE 5.3GHz BAND RESTRICTED BANDEDGE (High CHANNEL).....	254
11.2.11.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT1 IN THE 5.3GHz BAND RESTRICTED BANDEDGE (High CHANNEL).....	258
11.2.12.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT2 IN THE 5.3GHz BAND RESTRICTED BANDEDGE (High CHANNEL).....	262
11.3.	5.5-5.6 GHz.....	266
11.3.1.	TX ABOVE 1 GHz 802.11a 2Tx CDD MODE IN THE 5.5 GHz BAND	266
11.3.2.	TX ABOVE 1 GHz 802.11a 1Tx ANT1 IN THE 5.5 GHz BAND	276
11.3.3.	TX ABOVE 1 GHz 802.11a 1Tx ANT2 IN THE 5.5 GHz BAND	285
11.3.4.	TX ABOVE 1GHz 802.11n HT20 2Tx CDD MODE IN THE 5.5GHz BAND	296
11.3.5.	TX ABOVE 1GHz 802.11n HT20 1Tx ANT1 IN THE 5.5GHz BAND	306
11.3.6.	TX ABOVE 1GHz 802.11n HT20 1Tx ANT2 IN THE 5.5GHz BAND	316
11.3.7.	TX ABOVE 1GHz 802.11n HT40 2Tx CDD MODE IN THE 5.5GHz BAND	326
11.3.8.	TX ABOVE 1GHz 802.11n HT40 1Tx ANT1 IN THE 5.5GHz BAND	336
11.3.9.	TX ABOVE 1GHz 802.11n HT40 1Tx ANT2 IN THE 5.5GHz BAND	346

11.3.10.	TX ABOVE 1GHz 802.11ac VHT80 2Tx CDD MODE IN THE 5.5GHz BAND.....	356
11.3.11.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT1 IN THE 5.5GHz BAND	364
11.3.12.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT2 IN THE 5.5GHz BAND	372
11.4.	5.8 GHz.....	380
11.4.1.	TX ABOVE 1GHz 802.11a 2Tx CDD MODE IN THE 5.8GHz BAND	380
11.4.2.	TX ABOVE 1GHz 802.11a 1Tx ANT1 IN THE 5.8GHz BAND	390
11.4.3.	TX ABOVE 1GHz 802.11a 1Tx ANT2 IN THE 5.8GHz BAND	400
11.4.4.	TX ABOVE 1GHz 802.11n HT20 2Tx CDD MODE IN THE 5.8GHz BAND	410
11.4.5.	TX ABOVE 1GHz 802.11n HT20 1Tx ANT1 IN THE 5.8GHz BAND	420
11.4.6.	TX ABOVE 1GHz 802.11n HT20 1Tx ANT2 IN THE 5.8GHz BAND	430
11.4.7.	TX ABOVE 1GHz 802.11n HT40 2Tx CDD MODE IN THE 5.8GHz BAND	440
11.4.8.	TX ABOVE 1GHz 802.11n HT40 1Tx ANT1 IN THE 5.8GHz BAND	448
11.4.9.	TX ABOVE 1GHz 802.11n HT40 1Tx ANT2 IN THE 5.8GHz BAND	456
11.4.10.	TX ABOVE 1GHz 802.11ac VHT80 2Tx CDD MODE IN THE 5.8GHz BAND.....	464
11.4.11.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT1 IN THE 5.8GHz BAND	470
11.4.12.	TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT2 IN THE 5.8GHz BAND	476
11.5.	<i>Spurious Emissions for Simultaneous Transmission</i>	<i>482</i>
11.5.1.	Worst test case condition.....	482
12.	WORST-CASE BELOW 1 GHz	488
13.	AC POWER LINE CONDUCTED EMISSIONS.....	490
14.	DYNAMIC FREQUENCY SELECTION.....	493
14.1.	<i>OVERVIEW.....</i>	<i>493</i>
14.1.1.	LIMITS.....	493
14.1.2.	TEST AND MEASUREMENT SYSTEM.....	497
14.1.3.	SETUP OF EUT.....	500
14.1.4.	DESCRIPTION OF EUT	501
14.2.	<i>RESULTS FOR 20 MHz BANDWIDTH.....</i>	<i>502</i>
14.2.1.	TEST CHANNEL	502
14.2.2.	RADAR WAVEFORM AND TRAFFIC.....	502
14.2.3.	OVERLAPPING CHANNEL TESTS.....	504
14.2.4.	MOVE AND CLOSING TIME	504
14.3.	<i>RESULTS FOR 40 MHz BANDWIDTH.....</i>	<i>507</i>
14.3.1.	TEST CHANNEL	507
14.3.2.	RADAR WAVEFORM AND TRAFFIC.....	507
14.3.3.	OVERLAPPING CHANNEL TESTS.....	509
14.3.4.	MOVE AND CLOSING TIME	509
14.4.	<i>RESULTS FOR 80 MHz BANDWIDTH.....</i>	<i>512</i>
14.4.1.	TEST CHANNEL	512
14.4.2.	RADAR WAVEFORM AND TRAFFIC.....	512
14.4.3.	OVERLAPPING CHANNEL TESTS.....	514
14.4.4.	MOVE AND CLOSING TIME	514
15.	SETUP PHOTOS.....	517

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: CDMA/GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

MODEL NUMBER: SM-A8050

SERIAL NUMBER: R38M308CK1A (CONDUCTED, Original)
R38M10EZ6LM, R38M308CHXX, R38M308CJ1K (RADIATED, Original);
R38M10QK2VL, R38M10QK2SP (RADIATED, Spot check);

DATE TESTED: APR 01, 2019 - APR 09, 2019; (Original);
APR 08, 2019 - APR 16, 2019 (Spot Check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Hoonpyo Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMA805F NII WLAN(FCC CFR 47 Part 15E). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMA8050 shares the same enclosure and circuit board as FCC ID: A3LSMA805F. The WLAN antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA805F remains representative of FCC ID: A3LSMA8050. The test data of FCC ID: A3LSMA805F being submitted for this application to cover WLAN features.

1.3. SPOT CHECK VERIFICATION DATA (Worst case of the radiated spurious and band edge emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-A805F/DS Results	SM-A8050 Results		
					FCC ID : A3LSMA805F	FCC ID : A3LSMA8050		
UNII WLAN (5GHz)	Band Edge	802.11ac VHT80 ALL	5210 MHz	54 dBuV/m	48.61 dBuV/m	50.25 dBuV/m	1.64 dB	
	RSE	802.11a ANT2	5240 MHz	68.2 dBuV/m	62.27 dBuV/m	60.95 dBuV/m	-1.32 dB	2nd Harmonic
	Band Edge	802.11ac VHT80 ANT2	5290 MHz	54 dBuV/m	51.32 dBuV/m	51.97 dBuV/m	0.65 dB	
	RSE	802.11a ANT2	5320 MHz	54 dBuV/m	50.42 dBuV/m	50.14 dBuV/m	-0.28 dB	2nd Harmonic
	Band Edge	802.11ac VHT80 ANT2	5530 MHz	54 dBuV/m	48.32 dBuV/m	49.01 dBuV/m	0.69 dB	
	RSE	802.11n HT40 ANT2	5510 MHz	54 dBuV/m	50.79 dBuV/m	49.01 dBuV/m	-1.78 dB	2nd Harmonic
	Band Edge	802.11a ANT1	5825 MHz	-27 dBm	-35.21 dBm	-32.43 dBm	2.78 dB	
	RSE	802.11n HT20 ANT2	5745 MHz	54 dBuV/m	50.56 dBuV/m	45.55 dBuV/m	-5.01 dB	2nd Harmonic

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

Output power verification was performed for the spot check model, all conducted power test results were in the tune up tolerance range. Also deviation for maximum output power result is within upper 0.5dB range.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Tittle / Section
PCE	A3LSMA805F	Grant	4788886234-E1	Test	FCC Report WWAN / GSM,WCDMA, LTE B5
DTS	A3LSMA805F	Grant	4788886234-E2	Test	FCC Report DTS WLAN / All sections
			4788886234-E3	Test	FCC Report BLE All sections
DSS	A3LSMA805F	Grant	4788886234-E4	Test	FCC Report BT / All sections
NII	A3LSMA805F	Grant	4788886234-E5	Test	FCC Report UNII WLAN / All sections
DXX	A3LSMA805F	Grant	4788886234-E6	Test	FCC Report ANT+ / All sections
			4788886234-E7	Test	FCC Report NFC / All sections

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. KDB 662911 D01 v02r01
7. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input checked="" type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC . This test report addresses the NII (UNII 802.11a/n/ac) operational mode.

WiFi MIMO Condition

Frequency	Mode	Antenna 1	Antenna 2
2.4 GHz	802.11b	TX / RX	TX / RX
	802.11g	TX / RX	TX / RX
	802.11g MIMO	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11n MIMO	TX / RX	TX / RX
5 GHz	802.11a	TX / RX	TX / RX
	802.11a MIMO	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11n MIMO	TX / RX	TX / RX
	802.11ac	TX / RX	TX / RX
	802.11ac MIMO	TX / RX	TX / RX

Simultaneous TX Condition

Frequency	Supported
2.4 GHz Antenna 1 + 5 GHz Antenna 2	Yes
2.4 GHz Antenna 2 + 5 GHz Antenna 1	No
2.4 GHz Antenna 1 + 5 GHz Antenna 1	No
2.4 GHz Antenna 2 + 5 GHz Antenna 2	No
2.4 GHz Antenna 1 + 5 GHz MIMO	No
2.4 GHz Antenna 2 + 5 GHz MIMO	No
2.4 GHz MIMO + 5 GHz Antenna 1	No
2.4 GHz MIMO + 5 GHz Antenna 2	No
2.4 GHz MIMO + 5 GHz MIMO	No
2.4 GHz Bluetooth Antenna 1 + 5 GHz Antenna 2	Yes

Spurious Emissions for Simultaneous Transmission were reported on the section 11.5.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		Antenna1	Antenna2	Antenna1	Antenna2
5180 - 5240	802.11a MIMO	19.08		80.91	
	802.11n HT20 MIMO	18.90		77.62	
5190 - 5230	802.11n HT40 MIMO	18.57		71.94	
5210	802.11ac VHT80 MIMO	16.30		42.66	
5260 - 5320	802.11a MIMO	18.88		77.27	
	802.11n HT20 MIMO	18.67		73.62	
5270 - 5310	802.11n HT40 MIMO	16.99		50.00	
5290	802.11ac VHT80 MIMO	16.28		42.46	
5500 - 5720	802.11a MIMO	17.36		54.45	
	802.11n HT20 MIMO	17.87		61.24	
5510 - 5710	802.11n HT40 MIMO	18.50		70.79	
5530 - 5690	802.11ac VHT80 MIMO	16.50		44.67	
5745 - 5825	802.11a MIMO	18.51		70.96	
	802.11n HT20 MIMO	18.31		67.76	
5755 - 5795	802.11n HT40 MIMO	18.32		67.92	
5775	802.11ac VHT80 MIMO	15.93		39.17	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Range [MHz]	Antenna Gain [dBi]	
	Antenna 1	Antenna 2
UNII 1 5150 – 5250	-2.13	-2.83
UNII 2A 5250 – 5350	-1.87	-2.80
UNII 2C 5470 – 5725	-1.71	-2.98
UNII 3 5725 – 5850	-1.43	-3.30

5.4. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

UNII 1

5150 - 5250 MHz Authorized Frequency Band (Radiated Testing)		
Frequency Range [MHz]	Mode	Covered by
5180 - 5240	802.11a legacy 1TX/CDD 2TX	802.11a 2TX CDD
5180 - 5240	802.11HT20 1TX	802.11n HT20 2TX CDD
5180 - 5240	802.11HT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5190 - 5230	802.11n HT40 1TX	802.11n HT40 2TX CDD
5190 - 5230	802.11n HT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5210	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5210	802.11ac VHT80 2TX SDM/CDD	802.11ac VHT80 2TX CDD

UNII 2A

5250 - 5350 MHz Authorized Frequency Band (Radiated Testing)		
Frequency Range [MHz]	Mode	Covered by
5260 - 5320	802.11a legacy 1TX/CDD 2TX	802.11a 2TX CDD
5260 - 5320	802.11HT20 1TX	802.11n HT20 2TX CDD
5260 - 5320	802.11HT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5270 - 5310	802.11n HT40 1TX	802.11n HT40 2TX CDD
5270 - 5310	802.11n HT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5290	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5290	802.11ac VHT80 2TX SDM/CDD	802.11ac VHT80 2TX CDD

UNII 2C

5470 - 5725 MHz Authorized Frequency Band (Radiated Testing)		
Frequency Range [MHz]	Mode	Covered by
5500 - 5720	802.11a legacy 1TX/CDD 2TX	802.11a 2TX CDD
5500 - 5720	802.11HT20 1TX	802.11n HT20 2TX CDD
5500 - 5720	802.11HT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5500 - 5720	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5500 - 5720	802.11ac VHT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5510 - 5710	802.11n HT40 1TX	802.11n HT40 2TX CDD
5510 - 5710	802.11n HT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5510 - 5710	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5510 - 5710	802.11ac VHT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5530 - 5690	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5530 - 5690	802.11ac VHT80 2TX SDM/CDD	802.11ac VHT80 2TX CDD

UNII 3

5725 - 5850 MHz Authorized Frequency Band (Radiated Testing)		
Frequency Range [MHz]	Mode	Covered by
5745 - 5825	802.11a legacy 1TX/CDD 2TX	802.11a 2TX CDD
5745 - 5825	802.11HT20 1TX	802.11n HT20 2TX CDD
5745 - 5825	802.11HT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 2TX SDM/CDD	802.11n HT20 2TX CDD
5755 - 5795	802.11n HT40 1TX	802.11n HT40 2TX CDD
5755 - 5795	802.11n HT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 2TX SDM/CDD	802.11n HT40 2TX CDD
5775	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5775	802.11ac VHT80 2TX SDM/CDD	802.11ac VHT80 2TX CDD

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that below orientation was worst-case orientation for each antenna. Also this EUT have a camera pop up function when user operate front camera function. This condition was also considered.

Band	Worst Orientation					
	Camera Pou-up			Normal		
	X	Y	Z	X	Y	Z
ANTENNA 1(SISO)				○		
ANTENNA 2(SISO)			○			
ANTENNA ALL(MIMO)			○			

Based on the baseline scan, the worst-case data rates were:

- 802.11a mode: 6 Mbps
- 802.11n HT20mode: MCS0
- 802.11n HT40mode: MCS0
- 802.11ac VHT80mode: MCS0

Note : All radiated and power line conducted tests were performed connected with charger for evaluation of worst case mode.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37M1E50KV1SE3	N/A
Data Cable	SAMSUNG	EP-DA905BBE	N/A	N/A
Earphone	SAMSUNG	GHSS028-W4	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.1m	N/A
2	Audio	2	C Type	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
 Test software exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

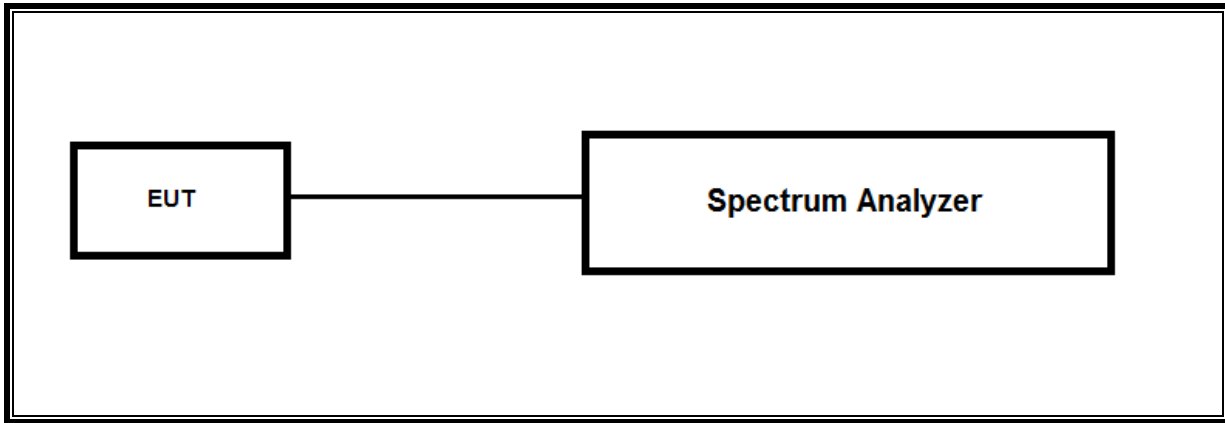

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

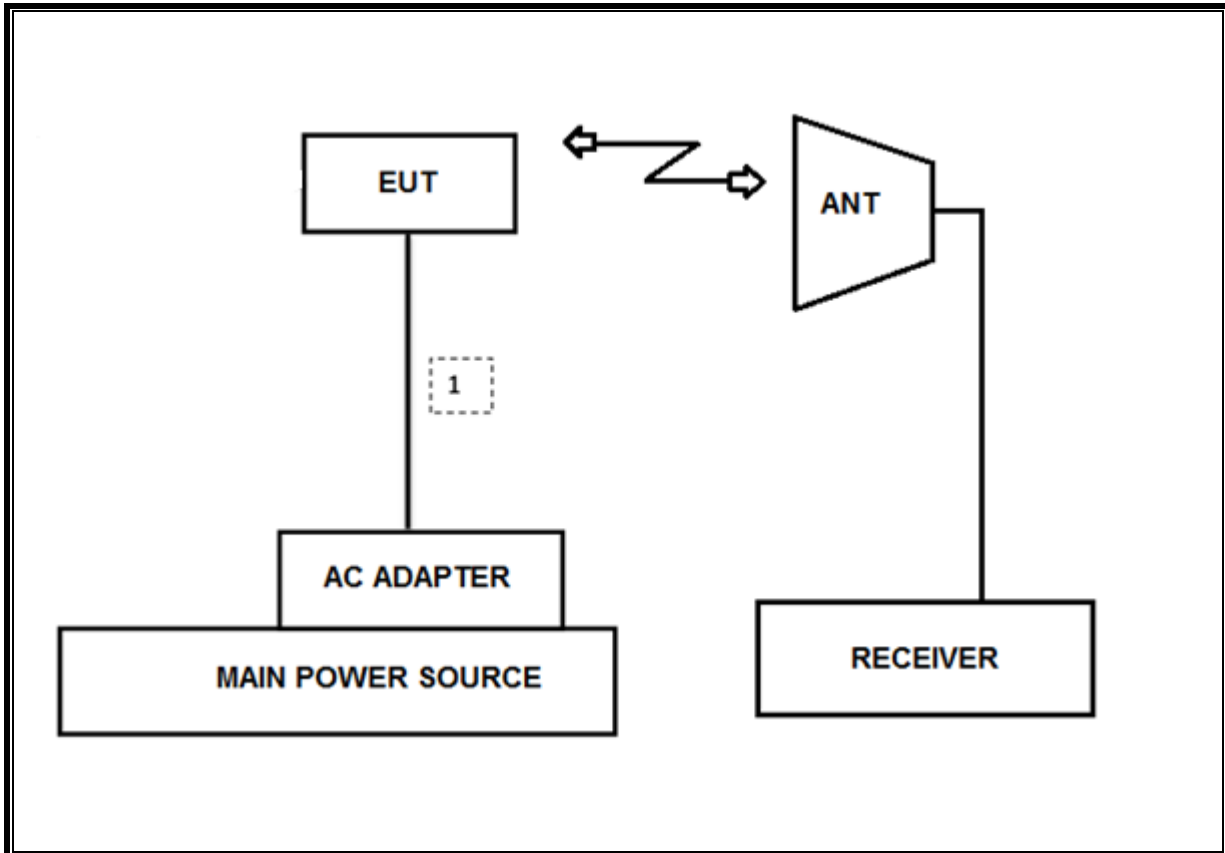

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	New Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	08-09-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-07-19
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-19
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-19
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-07-19
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-07-19
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-07-19
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-07-19
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-19
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-19
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-07-19
Combiner	WEINCHEL	1575	2150	08-08-19
Attenuator	PASTERNAK	PE7087-10	A001	08-08-19
Attenuator	PASTERNAK	PE7087-10	A008	08-08-19
Attenuator	PASTERNAK	PE7004-10	2	08-07-19
Attenuator	PASTERNAK	PE7087-10	A009	08-08-19
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-19
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-19
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-06-19
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-06-19
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-07-19
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-07-19
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-19
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-07-19
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-07-19
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-19
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-07-19
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-07-19
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-19
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
LISN	R&S	ENV-216	101837	08-09-19
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8Ghz)	500KHz	Condcuted	PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	PASS

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section B.

6dB Emission BW : KDB 789033 D02 v02r01, Section C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section D.

Conducted Output Power : KDB 789033 D02 v02r01, Section E.3.a(Method PM)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):

KDB 789033 D02 v02r01, Section E.2.d(Method SA-2)

Power Spectral Density : KDB 789033 D02 v02r01, Section F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section G.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section G.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11a	2.711	2.749	0.986	98.6%	0.00	0.010
802.11n HT20	2.519	2.557	0.985	98.5%	0.00	0.010
802.11n HT40	2.103	2.141	0.982	98.2%	0.00	0.010
802.11ac VHT80	4.147	4.184	0.991	99.1%	0.00	0.010



LIMITS



None; for reporting purposes only.

PROCEDURE

KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

9.2. DUTY CYCLE PLOTS

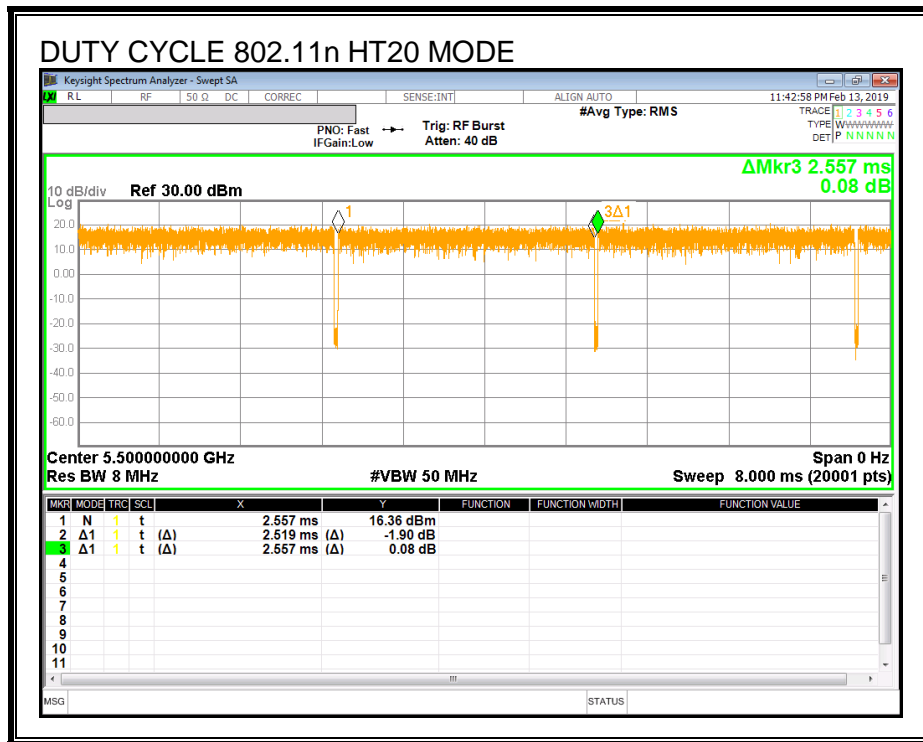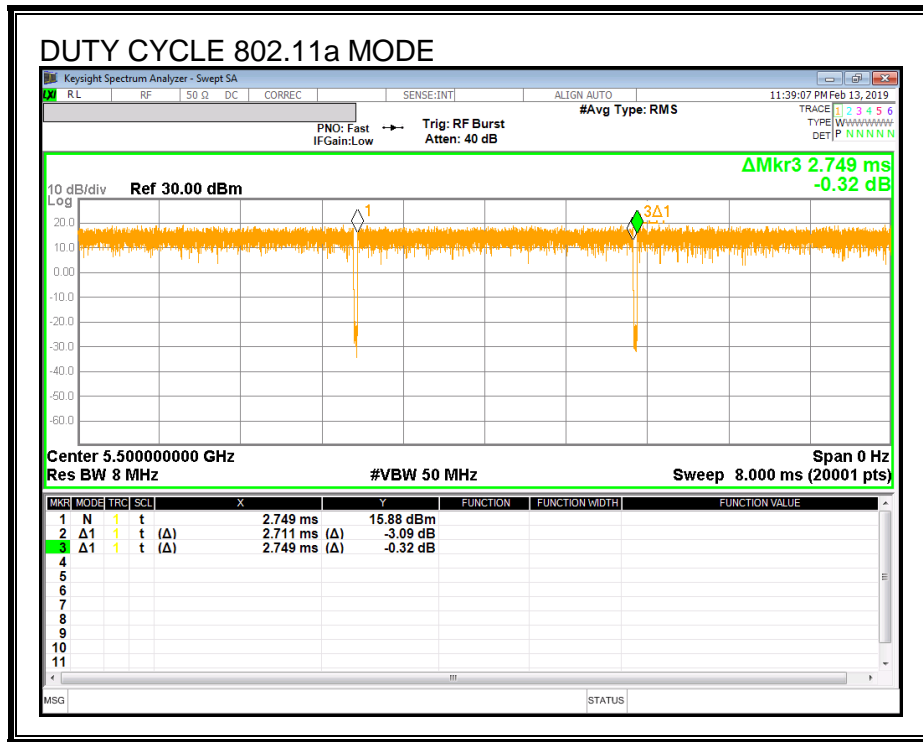

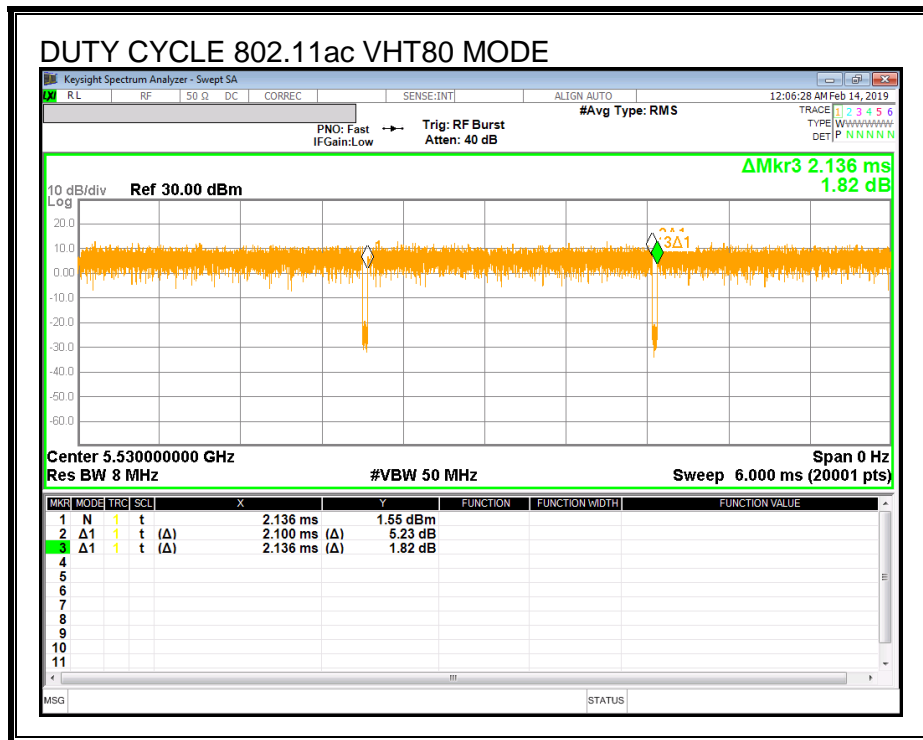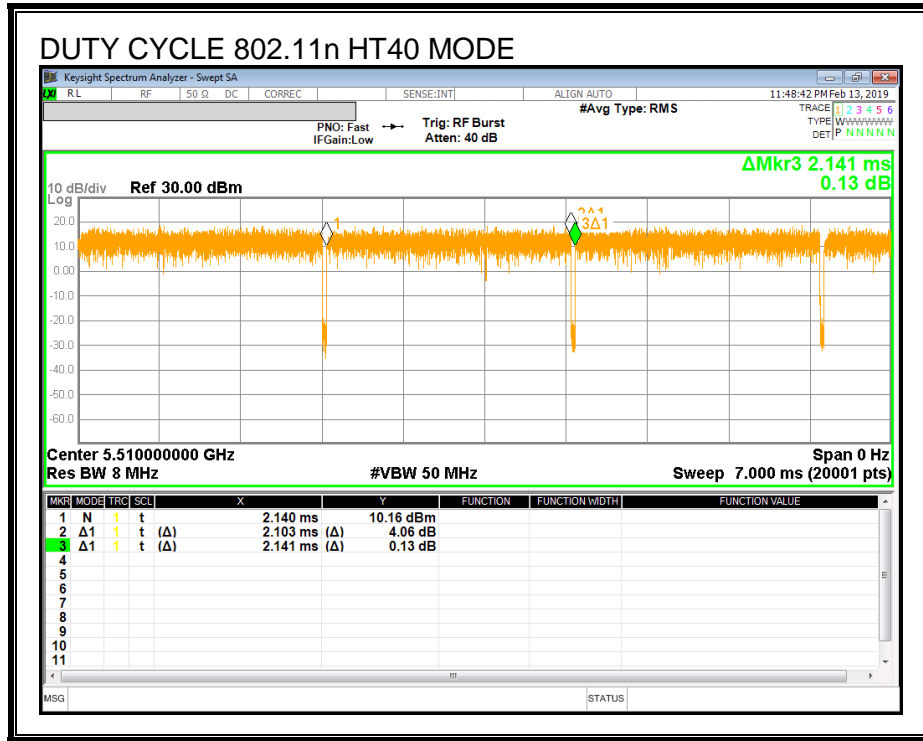

9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 26dB Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 26dB BW : 20.58MHz
- Turning Frequency : 5725MHz
- 26dB Bandwidth of UNII-2C band Portion
= $(5725 - (5720 - (20.58 / 2))) = 15.29 \text{ MHz}$
- 26dB Bandwidth of UNII-3 band Portion
= $(5720 + (20.58 / 2) - 5725) = 5.29 \text{ MHz}$

RESULTS

9.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5180	20.03	20.67
Mid	5200	21.21	19.50
High	5240	20.34	19.65
Worst		21.21	

9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5180	21.65	20.98
Mid	5200	19.98	20.41
High	5240	20.41	21.00
Worst		21.65	

9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5190	39.88	39.40
High	5230	40.23	39.84
Worst		40.23	

9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Middle	5210	81.06	80.67
Worst		81.06	

9.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5260	19.65	21.68
Mid	5300	20.77	19.91
High	5320	19.37	21.48
Worst		21.68	

9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5260	20.58	22.02
Mid	5300	20.20	20.10
High	5320	20.78	19.94
Worst		22.02	

9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5270	39.65	39.41
High	5310	39.62	39.96
Worst		39.96	

9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Middle	5290	81.67	81.20
Worst		81.67	

9.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5500	19.41	20.42
Mid	5580	20.75	19.41
High	5700	20.64	20.34
Straddle	5720	15.17	15.52
Worst		20.75	

9.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5500	20.21	22.37
Mid	5580	20.51	21.96
High	5700	20.64	20.90
Straddle	5720	15.18	16.02
Worst		22.37	

9.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5510	39.83	39.47
Mid	5590	39.44	39.68
High	5670	39.76	39.63
Straddle	5710	34.76	34.89
Worst		39.83	

9.3.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5530	81.24	81.01
High	5610	81.55	80.65
Staddle	5690	75.64	75.52
Worst		81.55	

9.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5720	5.17	5.52
Low	5745	19.88	20.72
Mid	5785	20.01	19.97
High	5825	19.88	19.28
Worst		20.72	

9.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5720	5.18	6.02
Low	5745	21.19	20.03
Mid	5785	20.01	21.02
High	5825	20.93	20.10
Worst		21.19	

9.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5710	4.76	4.89
Low	5755	39.58	39.73
High	5795	39.41	39.31
Worst		39.73	

9.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND


Channel	Frequency [MHz]	26 dB Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5690	5.64	5.52
Middle	5775	80.99	81.49
Worst		81.49	

9.3.17. 26 dB BANDWIDTH PLOTS


UNII 5.2 GHz IEEE 802.11a mode




UNII 5.2 GHz IEEE 802.11n HT20 mode

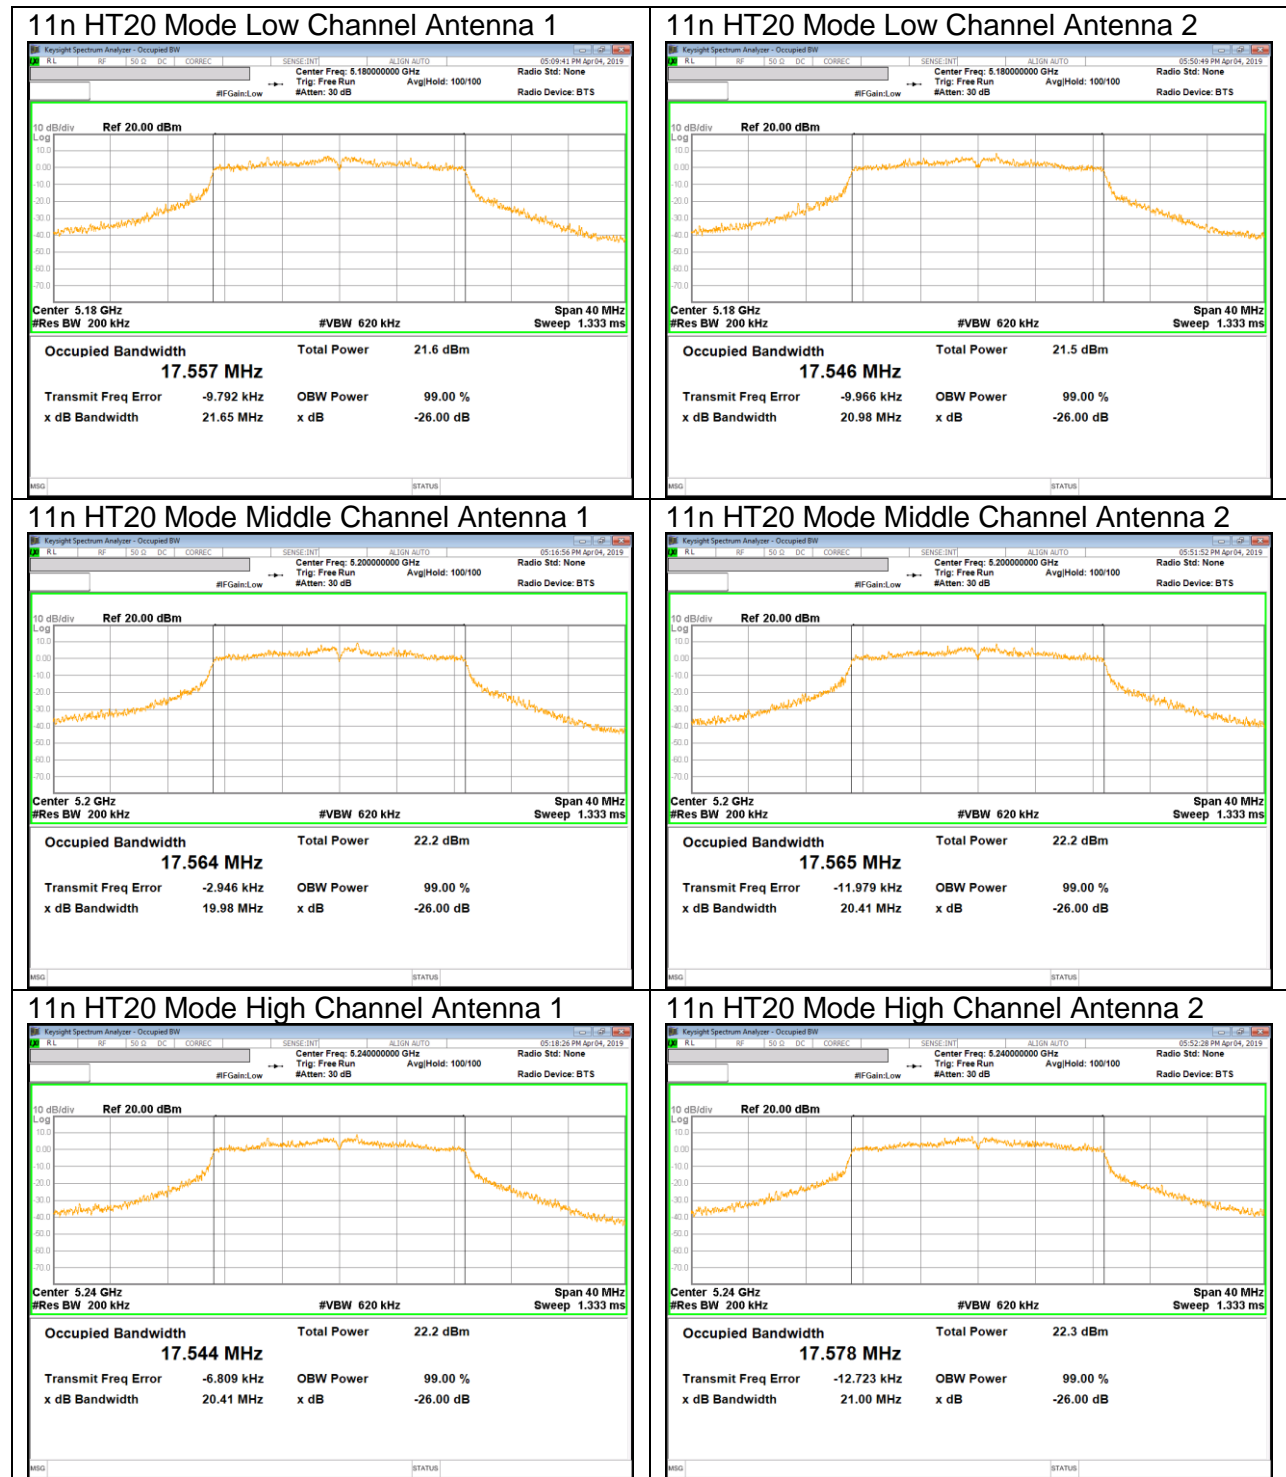

UNII 5.2 GHz IEEE 802.11n HT40 mode

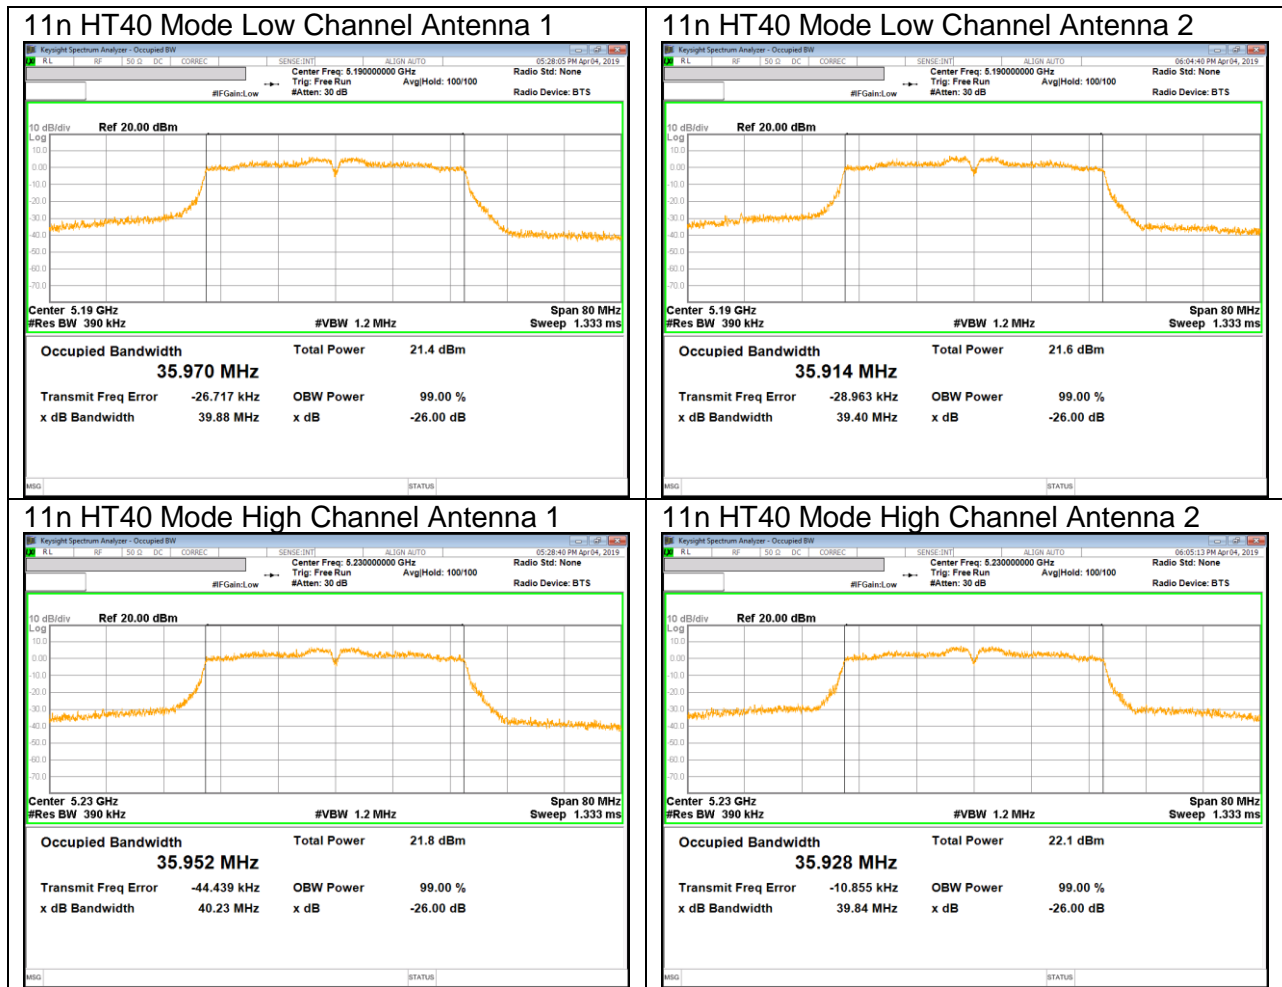


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

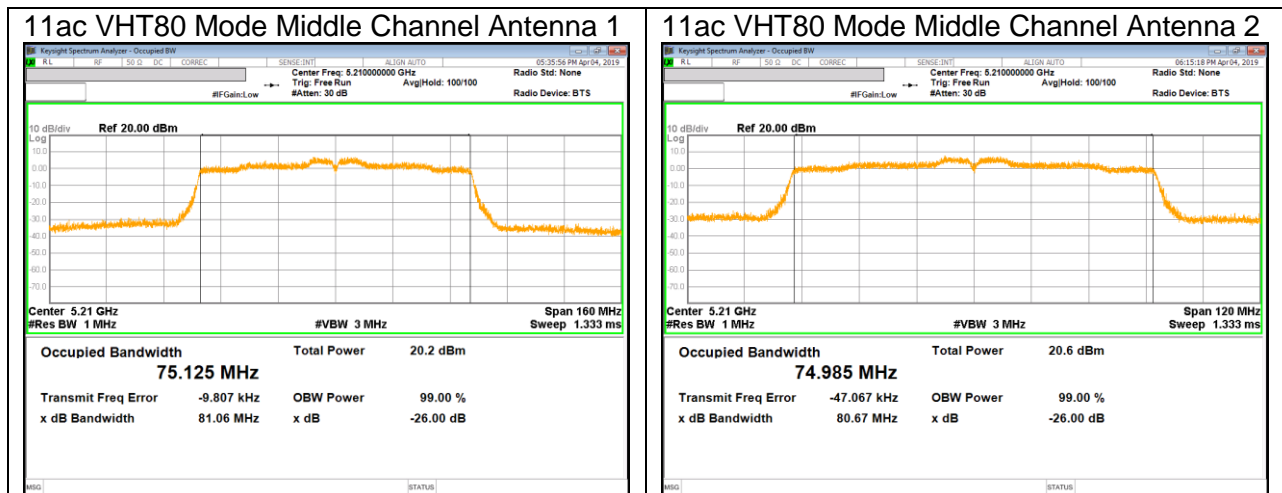


UNII 5.3 GHz IEEE 802.11a mode




UNII 5.3 GHz IEEE 802.11n HT20 mode

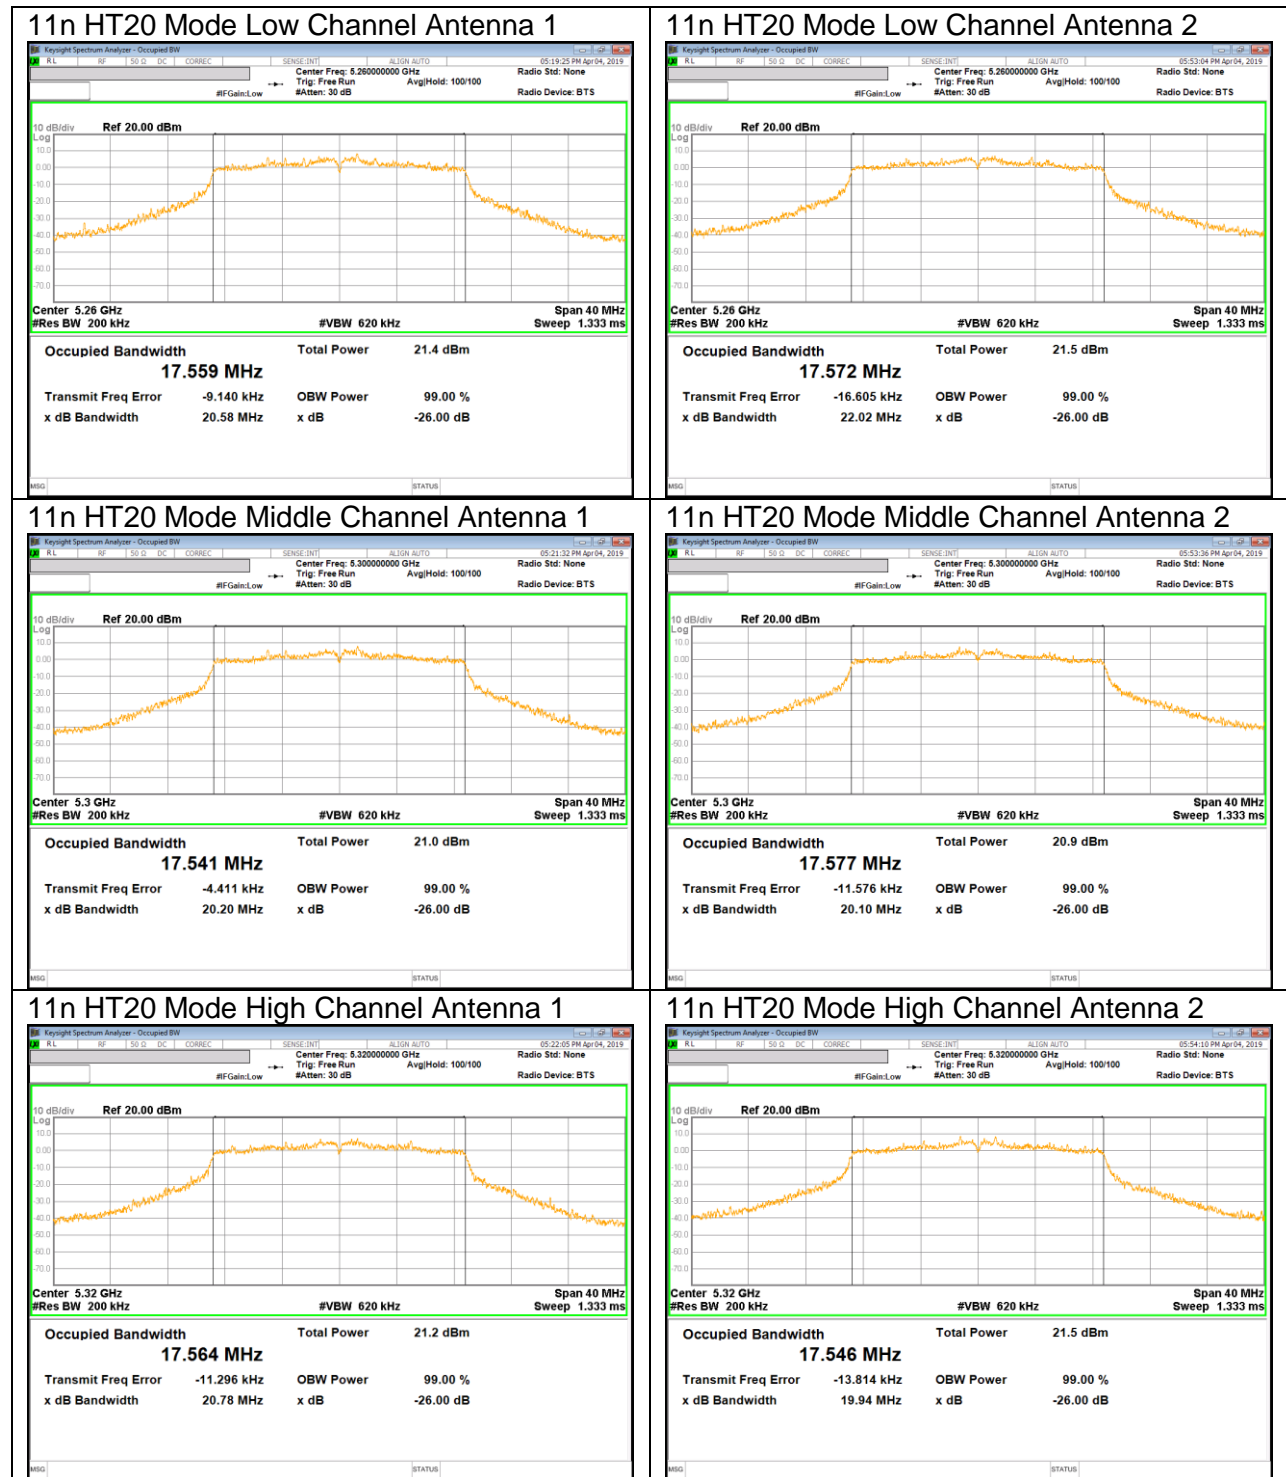

UNII 5.3 GHz IEEE 802.11n HT40 mode

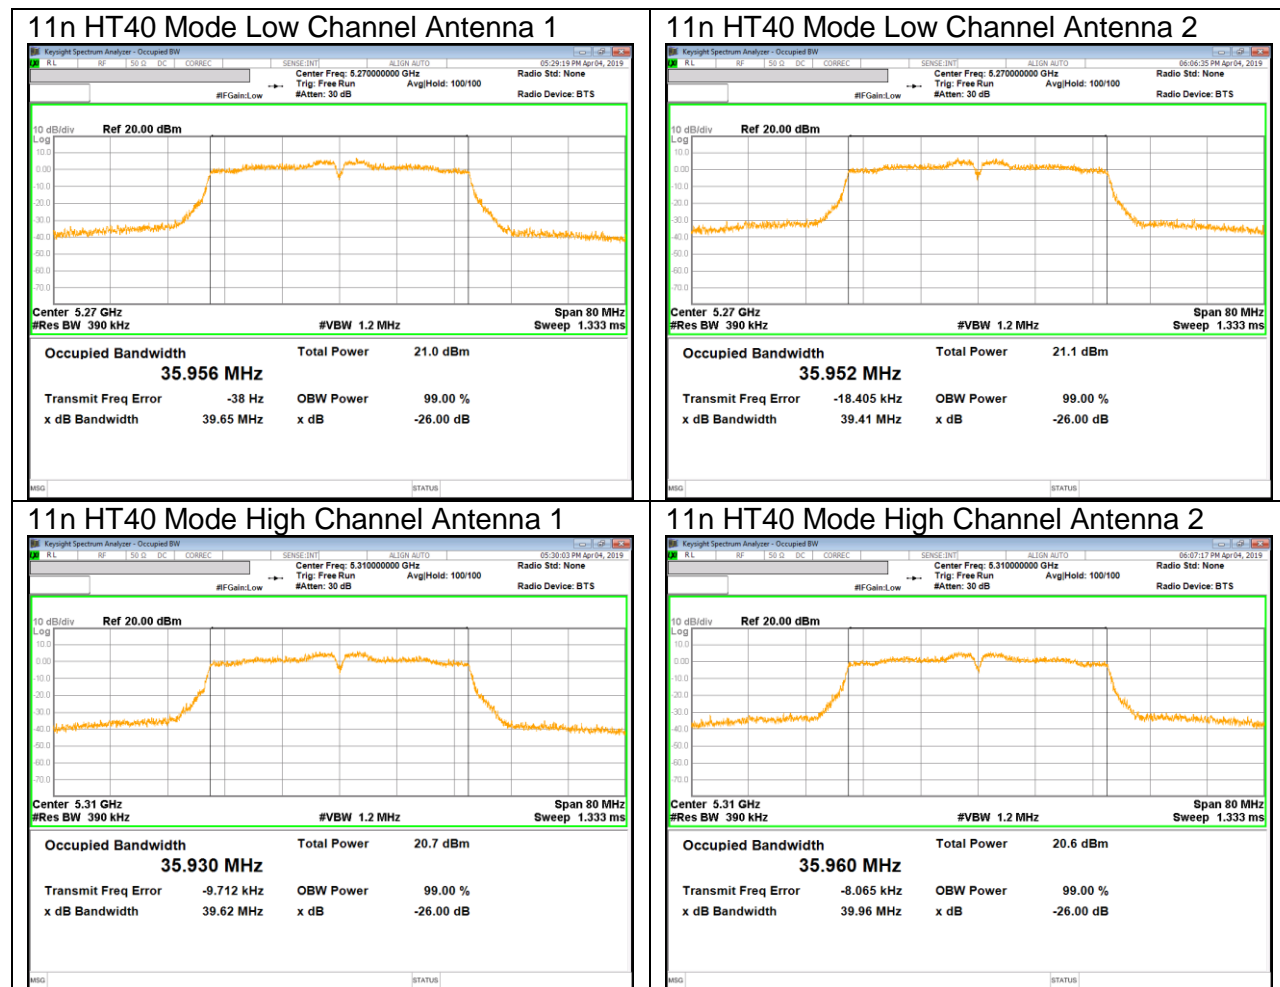


UNII 5.3 GHz IEEE 802.11ac VHT80 mode

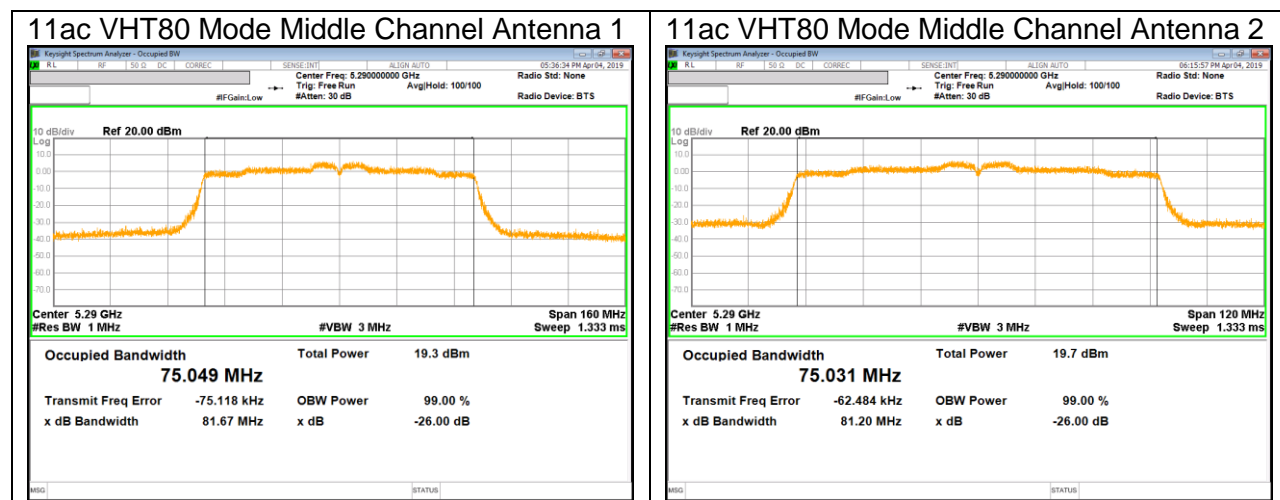


UNII 5.5 GHz IEEE 802.11a mode




UNII 5.5 GHz IEEE 802.11n HT20 mode

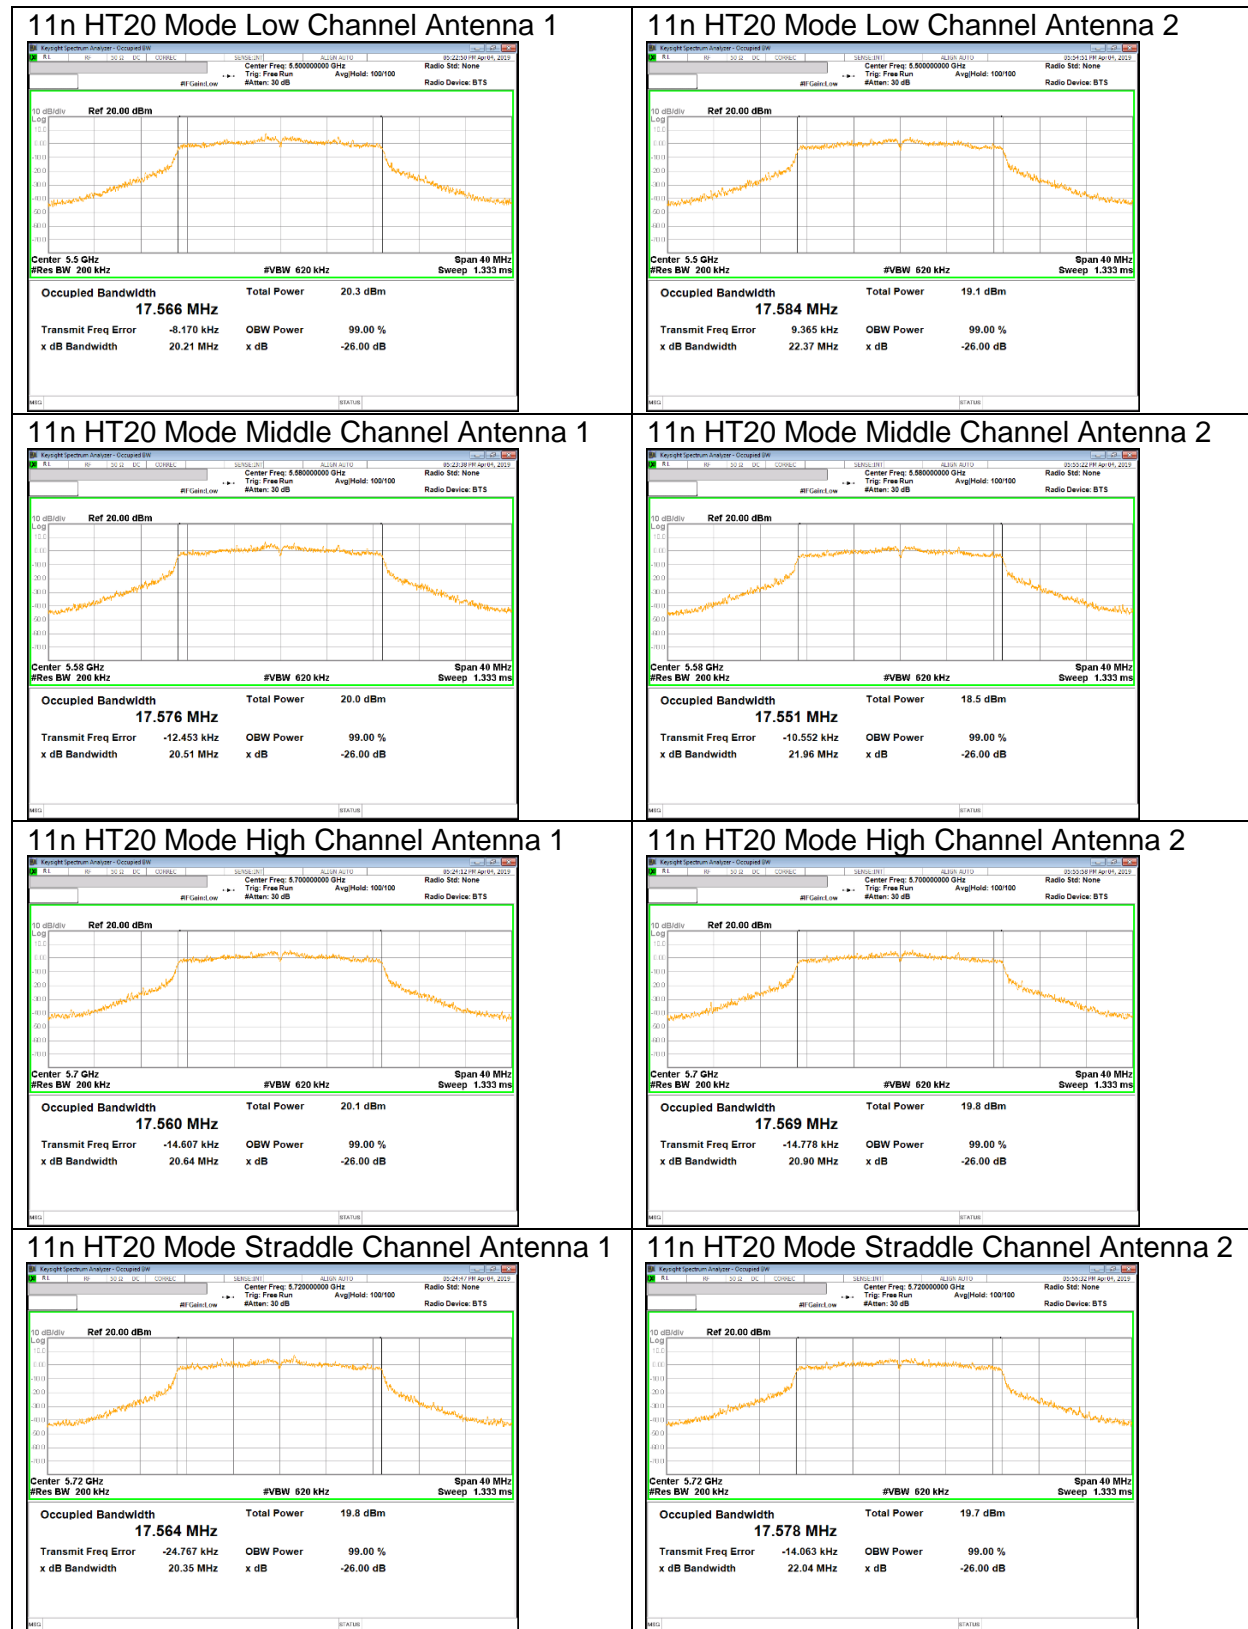


UNII 5.5 GHz IEEE 802.11n HT40 mode

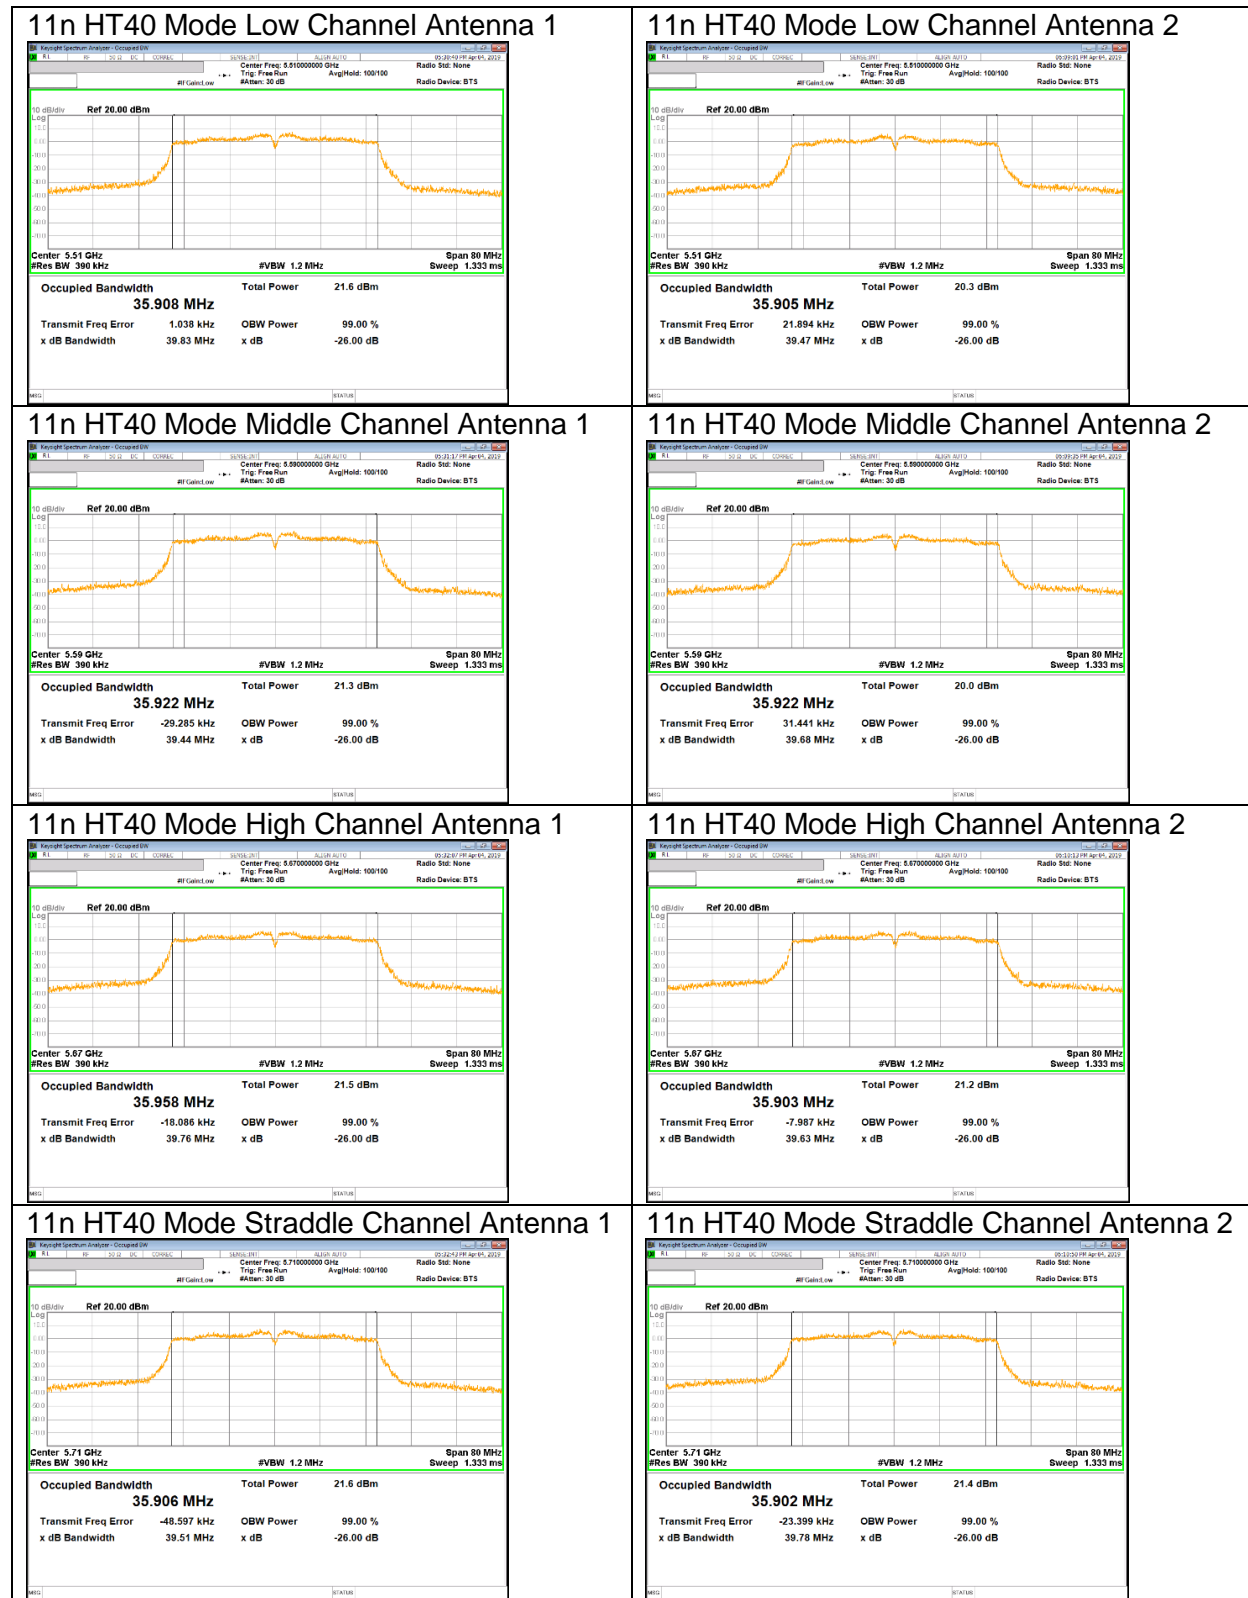


UNII 5.5 GHz IEEE 802.11ac VHT80 mode

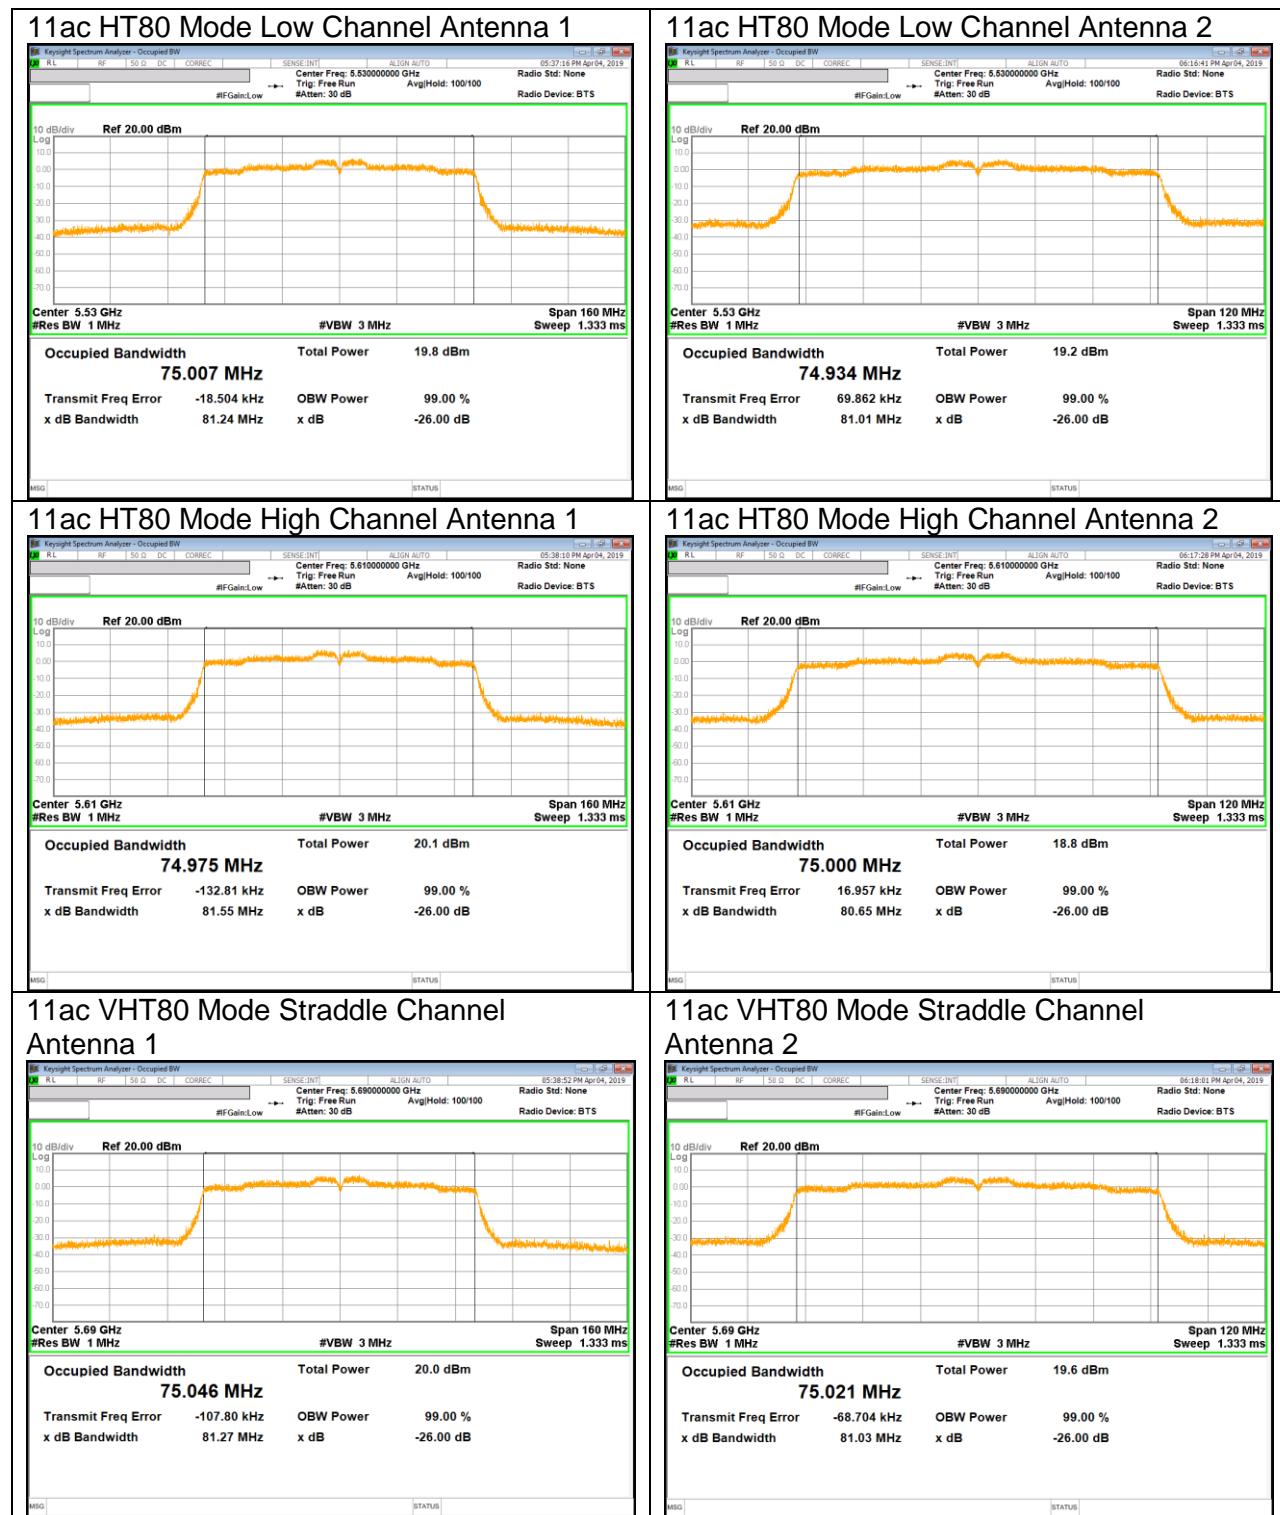





UNII 5.8 GHz IEEE 802.11a mode

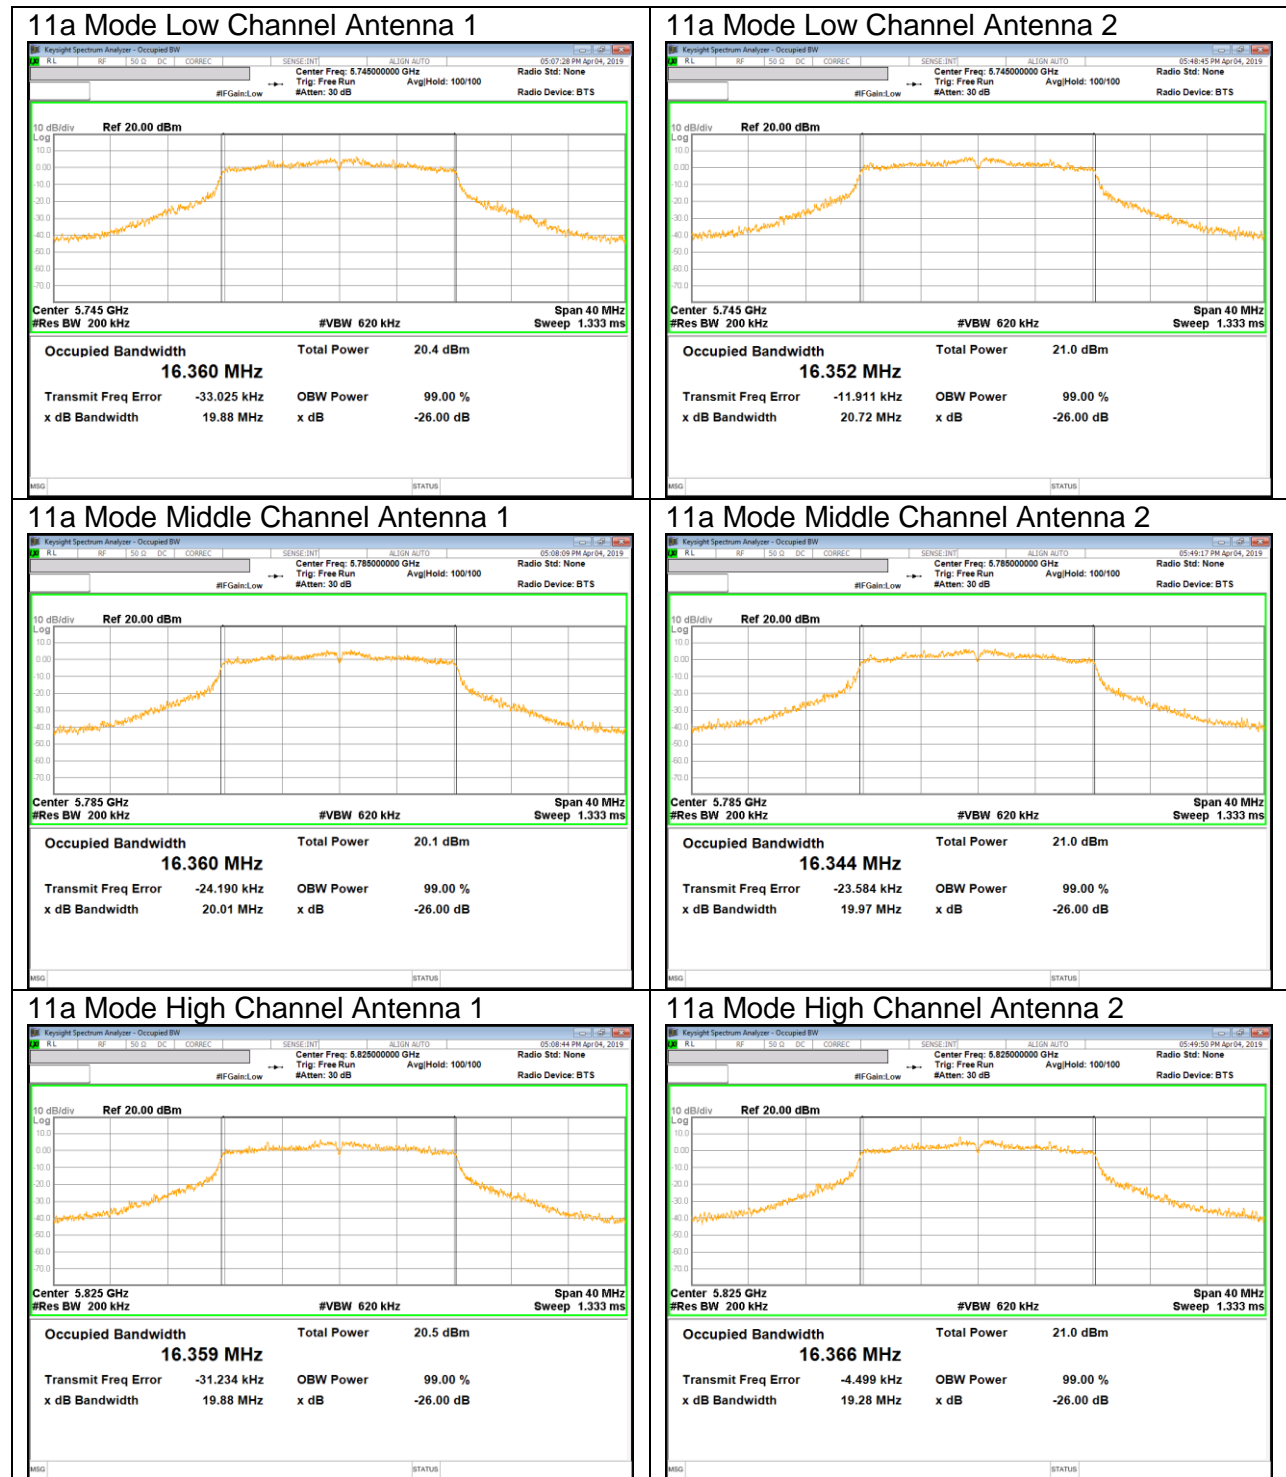



UNII 5.8 GHz IEEE 802.11n HT20 mode

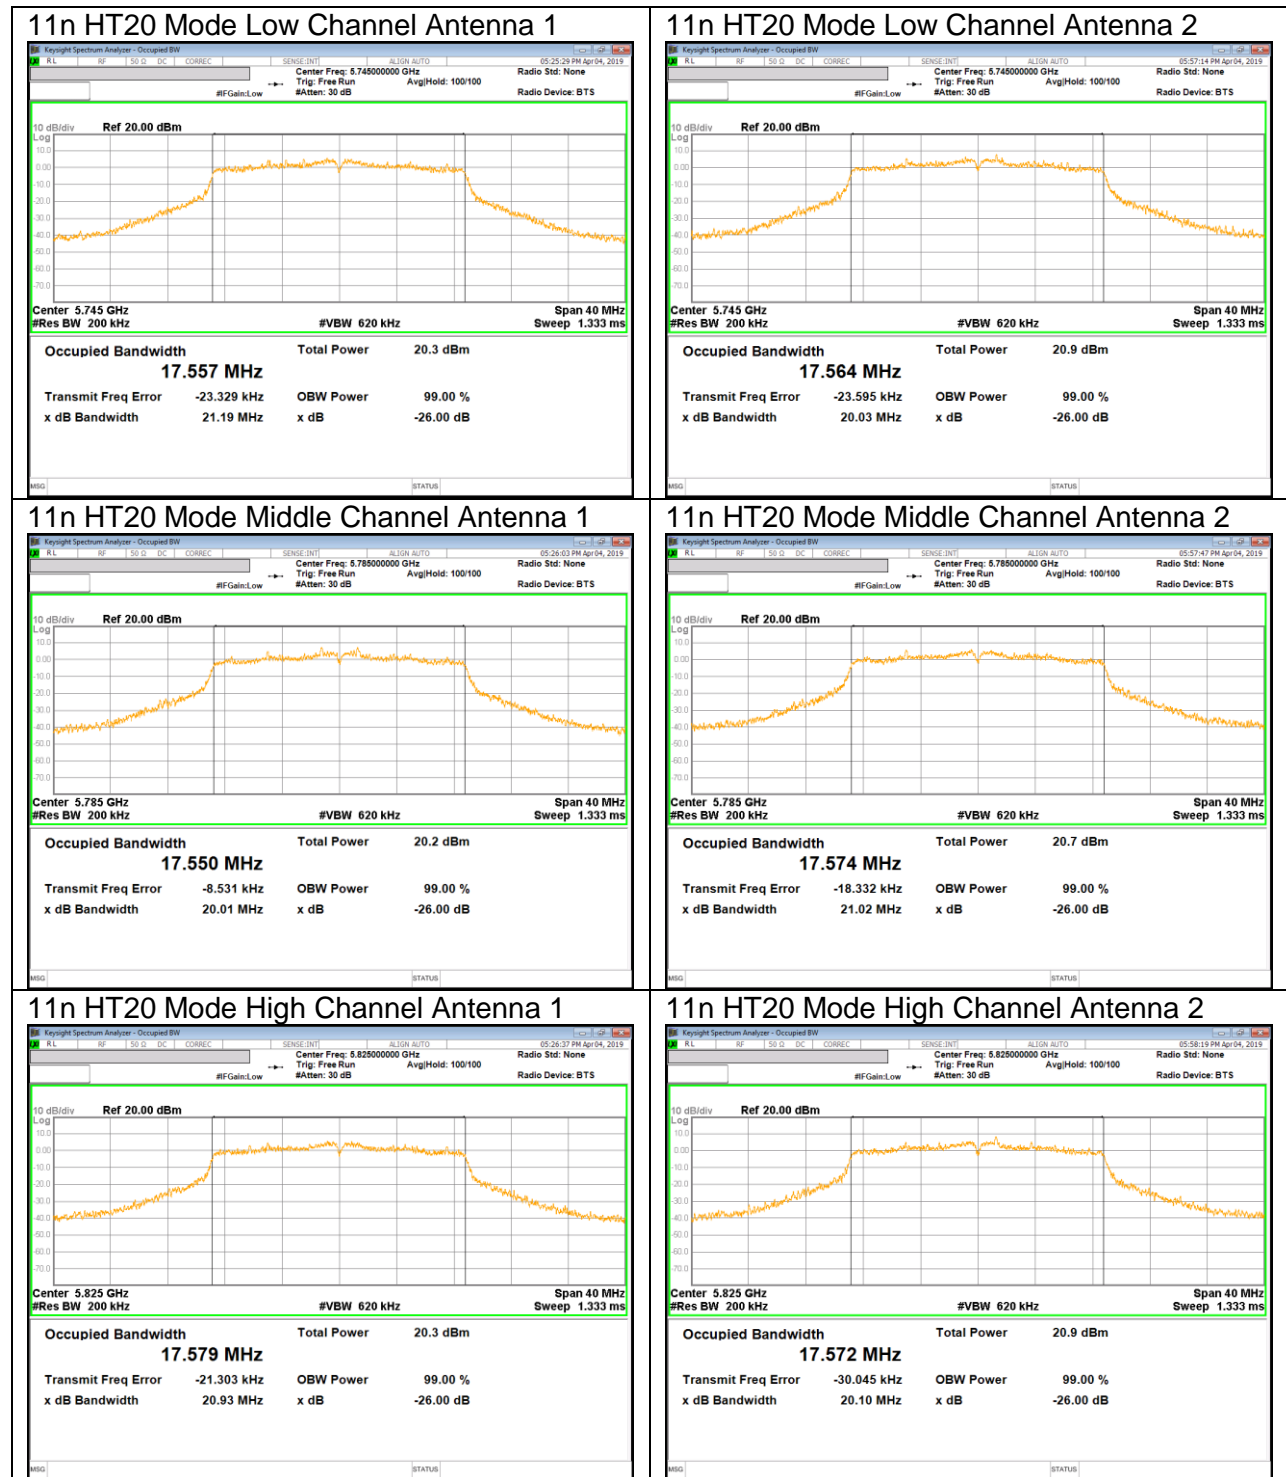

UNII 5.8 GHz IEEE 802.11n HT40 mode

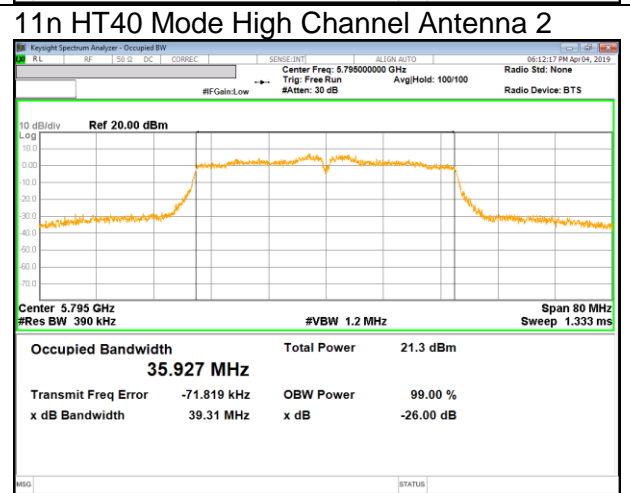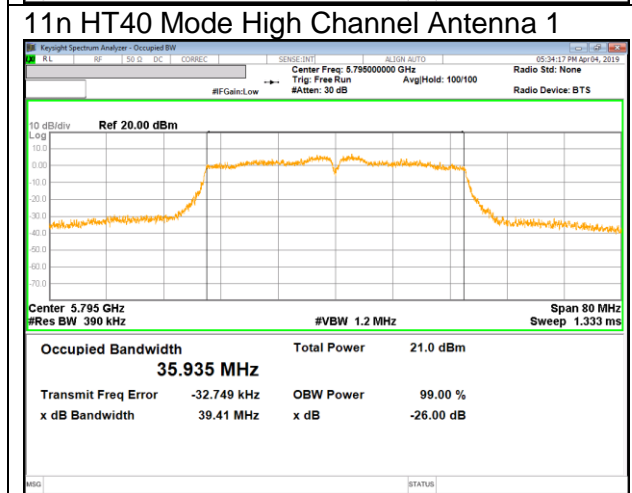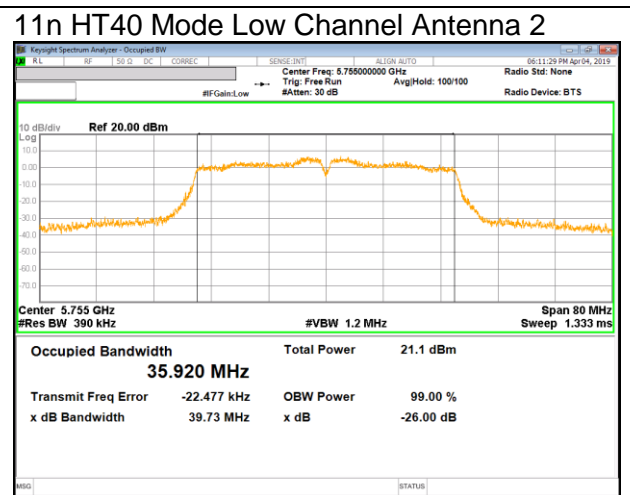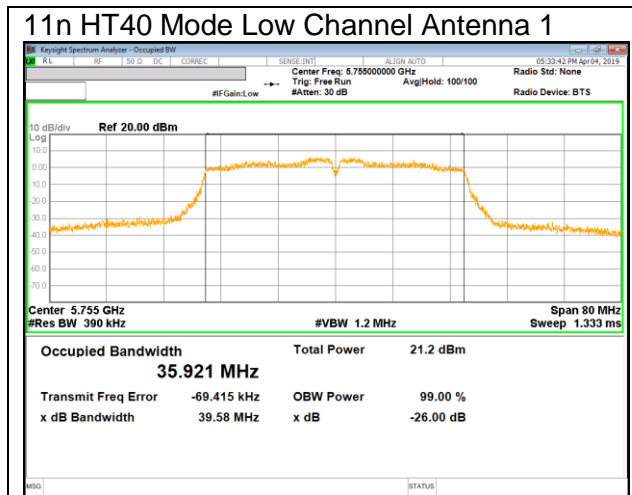

UNII 5.8 GHz IEEE 802.11ac VHT80 mode

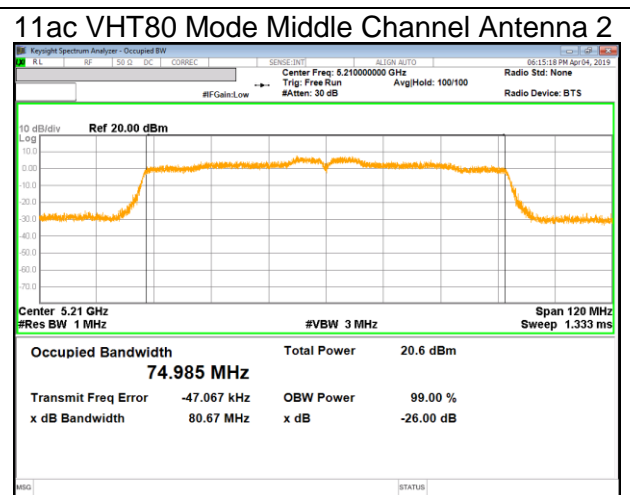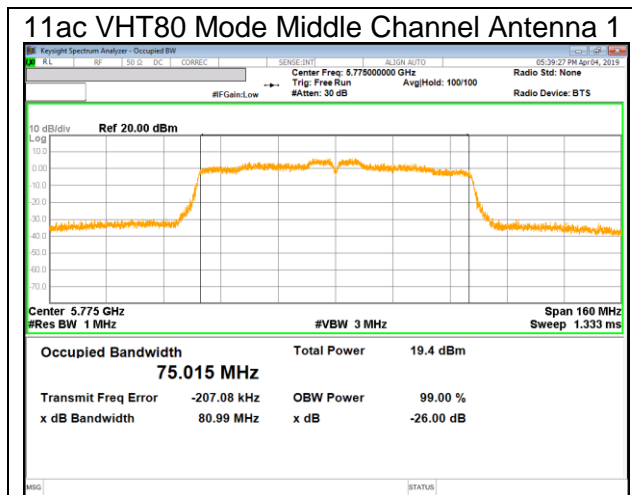

9.4. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01r04: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% to 5% of OBW, the VBW $\geq 3 \times$ RBW, single sweep.

NOTE

- Calculation for 99% Bandwidth of UNII-2C and UNII-3 Straddle Channel
 - ex) Fundamental frequency : 5720MHz
 - 99% BW : 21.00MHz
 - Turning Frequency : 5725MHz
 - 99% Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 - (21.00 / 2))) = 15.50 \text{ MHz}$
 - 99% Bandwidth of UNII-3 band Portion
 $= (5720 + (21.00 / 2) - 5725) = 5.50 \text{ MHz}$

RESULTS

9.4.1.802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5180	16.367	16.370
Mid	5200	16.360	16.372
High	5240	16.362	16.377
Worst		16.377	

9.4.2.802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5180	17.593	17.580
Mid	5200	17.580	17.592
High	5240	17.590	17.580
Worst		17.593	

9.4.3.802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5190	36.038	36.038
High	5230	35.958	36.002
Worst		36.038	

9.4.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Middle	5210	75.155	75.077
Worst		75.155	

9.4.5.802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5260	16.375	16.372
Mid	5300	16.370	16.367
High	5320	16.370	16.358
Worst		16.375	

9.4.6.802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5260	17.578	17.588
Mid	5300	17.598	17.609
High	5320	17.596	17.601
Worst		17.609	

9.4.7.802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5270	36.005	35.953
High	5310	36.009	35.986
Worst		36.009	

9.4.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Middle	5290	75.019	75.068
Worst		75.068	

9.4.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5500	16.383	16.388
Mid	5580	16.358	16.369
High	5700	16.358	16.376
Straddle	5720	13.189	13.197
Worst		16.388	

9.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5500	17.607	17.604
Mid	5580	17.573	17.593
High	5700	17.588	17.583
Straddle	5720	13.791	13.795
Worst		17.607	

9.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5510	35.976	35.974
Mid	5550	35.947	36.032
High	5670	35.968	35.981
Straddle	5710	33.008	32.996
Worst		36.032	

9.4.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Low	5530	75.002	74.913
High	5610	74.918	75.159
Straddle	5690	72.536	72.481
Worst		75.159	

9.4.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5720	3.190	3.198
Low	5745	16.376	16.368
Mid	5785	16.370	16.347
High	5825	16.372	16.367
Worst		16.376	

9.4.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5720	3.792	3.794
Low	5745	17.590	17.565
Mid	5785	17.589	17.590
High	5825	17.591	17.592
Worst		17.592	

9.4.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5710	3.008	2.996
Low	5755	36.044	35.949
High	5795	35.957	35.997
Worst		36.044	

9.4.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
Straddle	5690	2.535	2.480
Middle	5775	74.962	75.038
Worst		75.038	