

# FCC LTE REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> December 03, 2018
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Location:</b> HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	<b>Report No.:</b> HCT-RF-1811-FC023-R1

**FCC ID:** A3LSMA920N

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**Model(s):** SM-A920N  
**EUT Type:** Smart Phone  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §27, §2


Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41 (5)	2498.5 – 2687.5	4M51G7D	QPSK	0.048	16.78
		4M49W7D	16QAM	0.038	15.85
		4M52W7D	64QAM	0.032	15.06
LTE – Band 41 (10)	2501.0 – 2685.0	8M98G7D	QPSK	0.048	16.79
		8M96W7D	16QAM	0.039	15.90
		8M95W7D	64QAM	0.032	15.06
LTE – Band 41 (15)	2503.5 – 2682.5	13M4G7D	QPSK	0.045	16.55
		13M4W7D	16QAM	0.037	15.66
		13M4W7D	64QAM	0.029	14.61
LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.060	17.79
		17M8W7D	16QAM	0.050	16.98
		17M9W7D	64QAM	0.040	16.02

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by : Jae Ryang Do**  
 Engineer of Telecommunication Testing Center

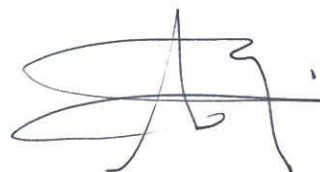

**Report approved by : Jong Seok Lee**  
 Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1811-FC023	November 26, 2018	- First Approval Report
HCT-RF-1811-FC023-R1	December 03, 2018	- Add the Conducted Spurious Plot

# Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. DESCRIPTION OF EUT .....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS .....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER .....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 OCCUPIED BANDWIDTH .....	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.6 CHANNEL EDGE.....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	12
3.8 WORST CASE(RADIATED TEST) .....	13
3.9 WORST CASE(CONDUCTED TEST) .....	14
4. LIST OF TEST EQUIPMENT .....	15
5. MEASUREMENT UNCERTAINTY .....	16
6. SUMMARY OF TEST RESULTS .....	17
7. SAMPLE CALCULATION .....	18
8. TEST DATA .....	20
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	20
8.2 RADIATED SPURIOUS EMISSIONS .....	22
8.3 OCCUPIED BANDWIDTH .....	26
8.4 CONDUCTED SPURIOUS EMISSIONS .....	27
8.5 CHANNEL EDGE.....	28
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	29
8.7 GEO-LOCATION MECHANISM .....	41
9. TEST PLOTS.....	50
10. ANNEX A_ TEST SETUP PHOTO .....	119

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMA920N
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27, §2
<b>EUT Type:</b>	Smart Phone
<b>Model(s):</b>	SM-A920N
<b>Tx Frequency:</b>	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
<b>Date(s) of Tests:</b>	November 12, 2018 ~ November 26, 2018

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Smart Phone with GSM/GPRS/EGPRS/UMTS and LTE.  
It also supports IEEE 802.11 a/b/g/n/ac, Bluetooth, BTLE, NFC & ANT+.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### **3. DESCRIPTION OF TESTS**

#### **3.1 TEST PROCEDURE**

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data



### 3.4 OCCUPIED BANDWIDTH.

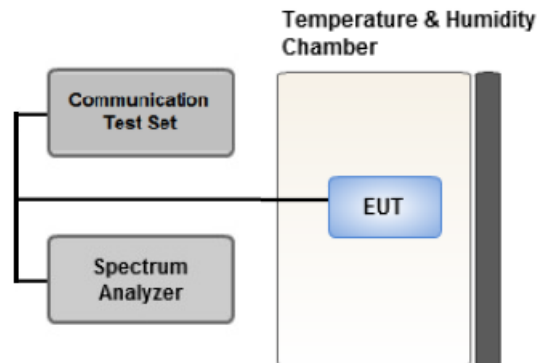

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

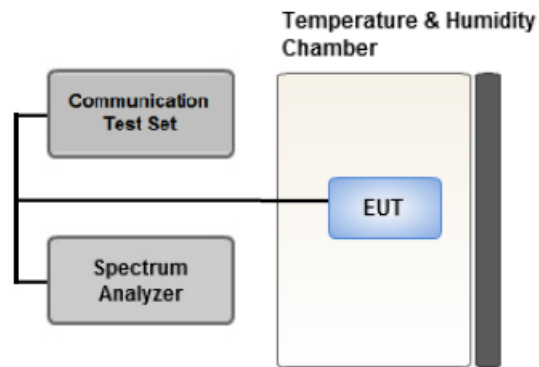

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.6 CHANNEL EDGE

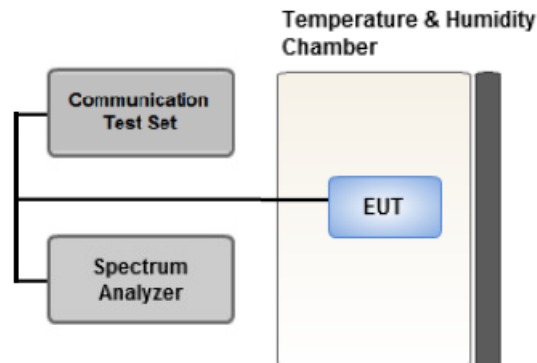

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings

1. Start and stop frequency were set such that the channel edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 2% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
2. All measurements were done at 3 channels.
3. The channel edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

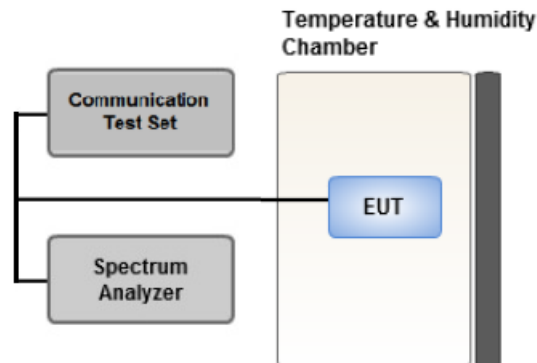

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.8 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

**3.9 WORST CASE(CONDUCTED TEST)**

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.  
 Conducted Output Power value can be confirmed on the SAR report.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM	5, 10, 15, 20	Mid	Full RB	0		
Channel Edge	QPSK	5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				5, 10, 15, 20	Low, Mid, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## **5. MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

<b>Parameter</b>	<b>Expanded Uncertainty (<math>\pm</math>dB)</b>
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71



## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> <li>■ <math>&lt; 40 + 10\log_{10} (P[\text{Watts}])</math> at Channel edges</li> <li>■ <math>&lt; 43 + 10\log_{10} (P[\text{Watts}])</math> between 5 and X MHz from Channel edges</li> <li>■ <math>&lt; 55 + 10\log_{10} (P[\text{Watts}])</math> beyond X MHz beyond from Channel edges</li> <li>■ <math>&lt; 43 + 10 \log (P)</math> dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul>	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	$< 2$ Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

#### ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

#### EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 64QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2498.5	LTE B41/ 5 MHz	QPSK	-27.40	7.24	10.98	1.60	H	< 2.00	0.046	16.62
		16-QAM	-28.30	6.34	10.98	1.60	H		0.037	15.72
		64-QAM	-29.33	5.31	10.98	1.60	H		0.029	14.69
2593.0		QPSK	-28.96	5.79	11.06	1.63	H		0.033	15.22
		16-QAM	-29.85	4.90	11.06	1.63	H		0.027	14.33
		64-QAM	-30.84	3.91	11.06	1.63	H		0.022	13.34
2687.5		QPSK	-28.00	7.28	11.15	1.65	H		0.048	16.78
		16-QAM	-28.93	6.35	11.15	1.65	H		0.038	15.85
		64-QAM	-29.72	5.56	11.15	1.65	H		0.032	15.06

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2501.0	LTE B41/ 10 MHz	QPSK	-27.38	7.26	10.98	1.60	H	< 2.00	0.046	16.64
		16-QAM	-28.27	6.37	10.98	1.60	H		0.038	15.75
		64-QAM	-29.34	5.30	10.98	1.60	H		0.029	14.68
2593.0		QPSK	-28.95	5.80	11.06	1.63	H		0.033	15.23
		16-QAM	-29.77	4.98	11.06	1.63	H		0.028	14.41
		64-QAM	-30.81	3.94	11.06	1.63	H		0.022	13.37
2685.0		QPSK	-27.87	7.29	11.15	1.65	H		0.048	16.79
		16-QAM	-28.76	6.40	11.15	1.65	H		0.039	15.90
		64-QAM	-29.60	5.56	11.15	1.65	H		0.032	15.06

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2503.5	LTE B41/ 15 MHz	QPSK	-27.39	7.18	10.98	1.61	H	< 2.00	0.045	16.55
		16-QAM	-28.28	6.29	10.98	1.61	H		0.037	15.66
		64-QAM	-29.33	5.24	10.98	1.61	H		0.029	14.61
2593.0		QPSK	-28.85	5.90	11.06	1.63	H		0.034	15.33
		16-QAM	-29.75	5.00	11.06	1.63	H		0.028	14.43
		64-QAM	-30.78	3.97	11.06	1.63	H		0.022	13.40
2682.5		QPSK	-28.31	6.72	11.15	1.64	H		0.042	16.23
		16-QAM	-29.24	5.79	11.15	1.64	H		0.034	15.30
		64-QAM	-30.04	4.99	11.15	1.64	H		0.028	14.50

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2506.0	LTE B41/ 20 MHz	QPSK	-26.15	8.42	10.98	1.61	H	< 2.00	0.060	17.79
		16-QAM	-26.96	7.61	10.98	1.61	H		0.050	16.98
		64-QAM	-27.92	6.65	10.98	1.61	H		0.040	16.02
2593.0		QPSK	-28.15	6.60	11.06	1.63	H		0.040	16.03
		16-QAM	-29.10	5.65	11.06	1.63	H		0.032	15.08
		64-QAM	-30.28	4.47	11.06	1.63	H		0.025	13.90
2680.0		QPSK	-28.13	6.90	11.15	1.64	H		0.044	16.41
		16-QAM	-29.25	5.78	11.15	1.64	H		0.034	15.29
		64-QAM	-30.28	4.75	11.15	1.64	H		0.027	14.26

**8.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY : 2687.50 MHz
- ▣ MEASURED OUTPUT POWER: 16.78 dBm = 0.048 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  41.78 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39675 (2498.5)	4,997.00	-43.68	12.89	-57.37	2.47	H	-46.95	63.73
	7,495.50	-43.79	11.51	-50.53	2.97	H	-41.99	58.77
	9,994.00	-38.32	11.21	-40.77	3.48	H	-33.04	49.82
	12,492.50	-46.30	14.20	-50.88	4.17	V	-40.85	57.63
40620 (2593.0)	5,186.00	-48.71	13.05	-61.31	2.58	H	-50.84	67.62
	7,779.00	-41.85	11.98	-49.37	2.93	H	-40.32	57.10
	10,372.00	-44.63	10.96	-47.62	3.62	H	-40.28	57.06
	12,965.00	-52.27	13.61	-54.87	4.08	H	-45.34	62.12
41565 (2687.5)	5,375.00	-48.33	13.49	-61.61	2.65	H	-50.77	67.55
	8,062.50	-45.82	11.46	-50.64	3.05	H	-42.23	59.01
	10,750.00	-44.28	10.99	-47.18	3.67	V	-39.86	56.64
	13,437.50	-53.92	13.01	-55.39	4.09	V	-46.47	63.25

- ▣ OPERATING FREQUENCY : 2685.00 MHz
- ▣ MEASURED OUTPUT POWER: 16.79 dBm = 0.048 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  41.79 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39700 (2501.0)	5,002.00	-44.67	12.89	-58.36	2.47	H	-47.94	64.73
	7,503.00	-44.46	11.53	-50.89	2.92	H	-42.29	59.08
	10,004.00	-39.12	11.25	-41.96	3.41	H	-34.12	50.91
	12,505.00	-48.21	14.24	-52.79	3.99	H	-42.54	59.33
40620 (2593.0)	5,186.00	-48.60	13.05	-61.20	2.58	H	-50.73	67.52
	7,779.00	-42.64	11.98	-50.16	2.93	H	-41.11	57.90
	10,372.00	-45.82	10.96	-48.81	3.62	H	-41.47	58.26
	12,965.00	-52.01	13.61	-54.61	4.08	H	-45.08	61.87
41540 (2685.0)	5,370.00	-47.92	13.50	-61.50	2.65	H	-50.65	67.44
	8,055.00	-41.33	11.46	-46.22	3.05	H	-37.82	54.61
	10,740.00	-45.84	10.98	-48.65	3.62	H	-41.29	58.08
	13,425.00	-52.61	13.07	-54.20	4.18	H	-45.31	62.10

- ▣ OPERATING FREQUENCY : 2503.50 MHz
- ▣ MEASURED OUTPUT POWER: 16.55 dBm = 0.045 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  41.55 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39725 (2503.5)	5,007.00	-44.76	12.86	-58.89	2.49	H	-48.52	65.07
	7,510.50	-43.99	11.54	-50.13	2.90	H	-41.49	58.04
	10,014.00	-39.97	11.27	-43.13	3.40	H	-35.27	51.82
	12,517.50	-47.89	14.23	-52.20	4.05	H	-42.02	58.57
40620 (2593.0)	5,186.00	-47.26	13.05	-59.86	2.58	H	-49.39	65.94
	7,779.00	-44.63	11.98	-52.15	2.93	H	-43.10	59.65
	10,372.00	-45.85	10.96	-48.84	3.62	H	-41.50	58.05
	12,965.00	-51.83	13.61	-54.43	4.08	H	-44.90	61.45
41515 (2682.5)	5,365.00	-46.63	13.51	-60.28	2.64	H	-49.41	65.96
	8,047.50	-40.37	11.45	-45.34	3.05	H	-36.94	53.49
	10,730.00	-45.15	10.98	-47.96	3.60	H	-40.58	57.13
	13,412.50	-52.94	13.09	-54.93	4.17	H	-46.01	62.56



- ▣ OPERATING FREQUENCY : 2506.00 MHz
- ▣ MEASURED OUTPUT POWER: 17.79 dBm = 0.060 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10} (W) =$  42.79 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39750 (2506.0)	5,012.00	-44.66	12.86	-58.79	2.49	H	-48.42	66.21
	7,518.00	-43.47	11.57	-48.78	2.93	H	-40.14	57.93
	10,024.00	-40.47	11.29	-43.30	3.48	H	-35.48	53.27
	12,530.00	-49.38	14.22	-54.03	4.17	H	-43.98	61.77
40620 (2593.0)	5,186.00	-48.49	13.05	-61.09	2.58	H	-50.62	68.41
	7,779.00	-43.26	11.98	-50.78	2.93	H	-41.73	59.52
	10,372.00	-46.47	10.96	-49.46	3.62	H	-42.12	59.91
	12,965.00	-52.92	13.61	-55.52	4.08	H	-45.99	63.78
41490 (2680.0)	5,360.00	-45.89	13.51	-59.61	2.63	H	-48.73	66.52
	8,040.00	-40.88	11.46	-45.78	3.06	H	-37.38	55.17
	10,720.00	-45.58	10.97	-48.21	3.66	H	-40.90	58.69
	13,400.00	-51.37	13.11	-52.89	4.16	H	-43.94	61.73

**8.3 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
41	5 MHz	2593.0	QPSK	25	0	4.5089
			16-QAM			4.4884
			64-QAM			4.5146
	10 MHz		QPSK	50		8.9795
			16-QAM			8.9637
			64-QAM			8.9494
	15 MHz		QPSK	75		13.420
			16-QAM			13.413
			64-QAM			13.385
	20 MHz		QPSK	100		17.895
			16-QAM			17.836
			64-QAM			17.920

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 51 ~ 62.

**8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	25.7888	30.131	-66.901	-36.770	-25.00
		2593.0	25.7360	30.131	-67.302	-37.171	
		2687.5	26.1382	30.131	-66.729	-36.598	
	10	2501.0	26.1366	30.131	-67.049	-36.918	
		2593.0	26.0999	30.131	-67.271	-37.140	
		2685.0	25.8321	30.131	-66.402	-36.271	
	15	2503.5	26.1089	30.131	-67.134	-37.003	
		2593.0	26.4460	30.131	-66.761	-36.630	
		2682.5	26.1551	30.131	-66.900	-36.769	
	20	2506.0	26.1197	30.131	-66.968	-36.837	
		2593.0	26.1770	30.131	-66.869	-36.738	
		2680.0	26.1782	30.131	-66.617	-36.486	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 91 ~ 118.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

**8.5 CHANNEL EDGE**

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2498.5	QPSK	25/0	-24.84	-24.63	-25.78	-23.44	-33.35	-31.74	-32.46
10 MHz	2501.0	QPSK	50/0	-28.12	-25.61	-29.37	-29.13	-29.92	-27.48	-35.46
15 MHz	2503.5	QPSK	75/0	-26.79	-25.71	-29.71	-27.70	-31.69	-28.04	-35.86
20 MHz	2506.0	QPSK	100/0	-26.79	-25.89	-30.43	-28.46	-33.01	-28.69	-37.80
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resoure Block Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-26.20	-26.95	-30.80	-28.87
	2687.5	QPSK	25	0	-26.28	-25.95	-22.94	-21.63
10 MHz	2593.0	QPSK	50	0	-28.98	-28.02	-33.28	-31.53
	2685.0	QPSK	50	0	-28.09	-27.40	-29.88	-28.03
15 MHz	2593.0	QPSK	75	0	-28.74	-28.15	-33.64	-32.38
	2682.5	QPSK	75	0	-30.48	-28.39	-29.18	-27.12
20 MHz	2593.0	QPSK	100	0	-28.64	-27.93	-33.15	-31.81
	2680.0	QPSK	100	0	-31.38	-30.40	-29.76	-28.44
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resoure Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-36.12	-35.46	-36.10	-36.59
	2687.5	QPSK	25	0	-33.45	-31.61	-35.70	-34.33
10 MHz	2593.0	QPSK	50	0	-33.82	-32.28	-40.59	-39.24
	2685.0	QPSK	50	0	-31.14	-28.68	-39.57	-35.34
15 MHz	2593.0	QPSK	75	0	-35.31	-31.50	-39.28	-38.29
	2682.5	QPSK	75	0	-31.74	-28.41	-39.77	-37.66
20 MHz	2593.0	QPSK	100	0	-34.55	-32.09	-40.04	-39.70
	2680.0	QPSK	100	0	-32.70	-29.37	-40.82	-41.76
Limit					-13.0		-25.0	


**Note:**

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 63 ~ 90. (1RB & Full RB)

**8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- MODE: LTE 41
- OPERATING FREQUENCY: 2498,500,000 Hz
- BANDWIDTH: 39675 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2498 500 015	0.0	0.000 000	0.000
100%		-30	2498 500 028	12.5	0.000 001	0.005
100%		-20	2498 500 032	16.6	0.000 001	0.007
100%		-10	2498 500 026	10.3	0.000 000	0.004
100%		0	2498 500 026	10.1	0.000 000	0.004
100%		+10	2498 500 026	10.2	0.000 000	0.004
100%		+30	2498 500 026	10.2	0.000 000	0.004
100%		+40	2498 500 023	7.5	0.000 000	0.003
100%		+50	2498 500 033	17.8	0.000 001	0.007
85%		3.50	+20	2498 500 028	12.4	0.000 000

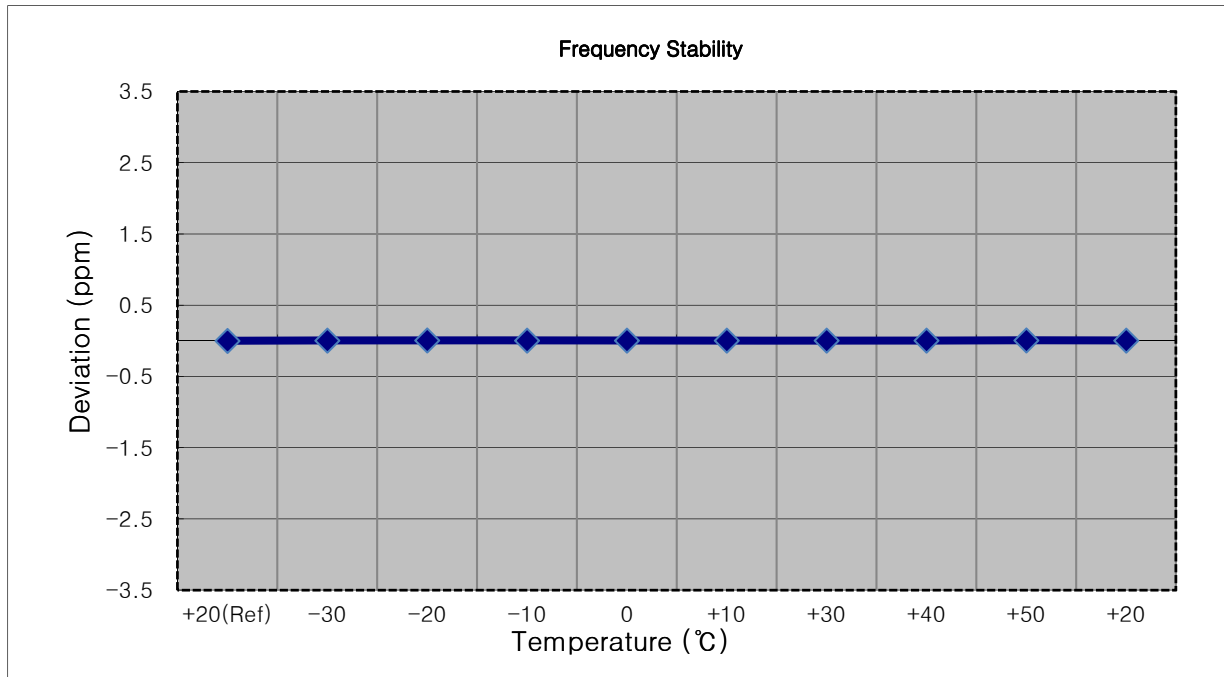


- MODE: LTE 41
- OPERATING FREQUENCY: 2501,000,000 Hz
- BANDWIDTH: 39700 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2500 999 986	0.0	0.000 000	0.000
100%		-30	2500 999 975	-10.4	0.000 000	-0.004
100%		-20	2500 999 976	-9.2	0.000 000	-0.004
100%		-10	2500 999 979	-6.5	0.000 000	-0.003
100%		0	2500 999 981	-4.8	0.000 000	-0.002
100%		+10	2500 999 989	3.4	0.000 000	0.001
100%		+30	2500 999 988	2.8	0.000 000	0.001
100%		+40	2500 999 970	-16.1	-0.000 001	-0.006
100%		+50	2500 999 980	-6.0	0.000 000	-0.002
85%	3.50	+20	2500 999 975	-11.0	0.000 000	-0.004

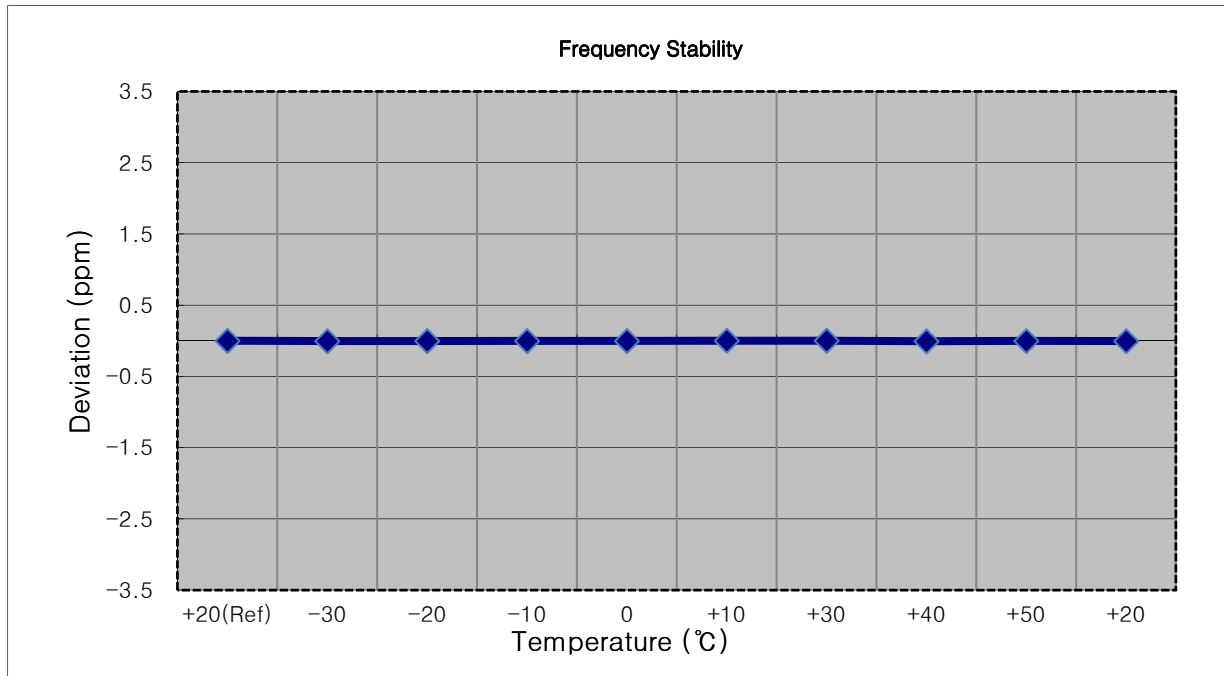


- MODE: LTE 41
- OPERATING FREQUENCY: 2503,500,000 Hz
- BANDWIDTH: 39725 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2503 500 010	0.0	0.000 000	0.000
100%		-30	2503 500 018	8.0	0.000 000	0.003
100%		-20	2503 499 999	-11.0	0.000 000	-0.004
100%		-10	2503 500 019	9.1	0.000 000	0.004
100%		0	2503 500 017	7.1	0.000 000	0.003
100%		+10	2503 500 019	8.7	0.000 000	0.003
100%		+30	2503 500 002	-7.7	0.000 000	-0.003
100%		+40	2503 500 018	8.3	0.000 000	0.003
100%		+50	2503 499 998	-12.5	0.000 000	-0.005
85%	3.50	+20	2503 500 002	-7.8	0.000 000	-0.003

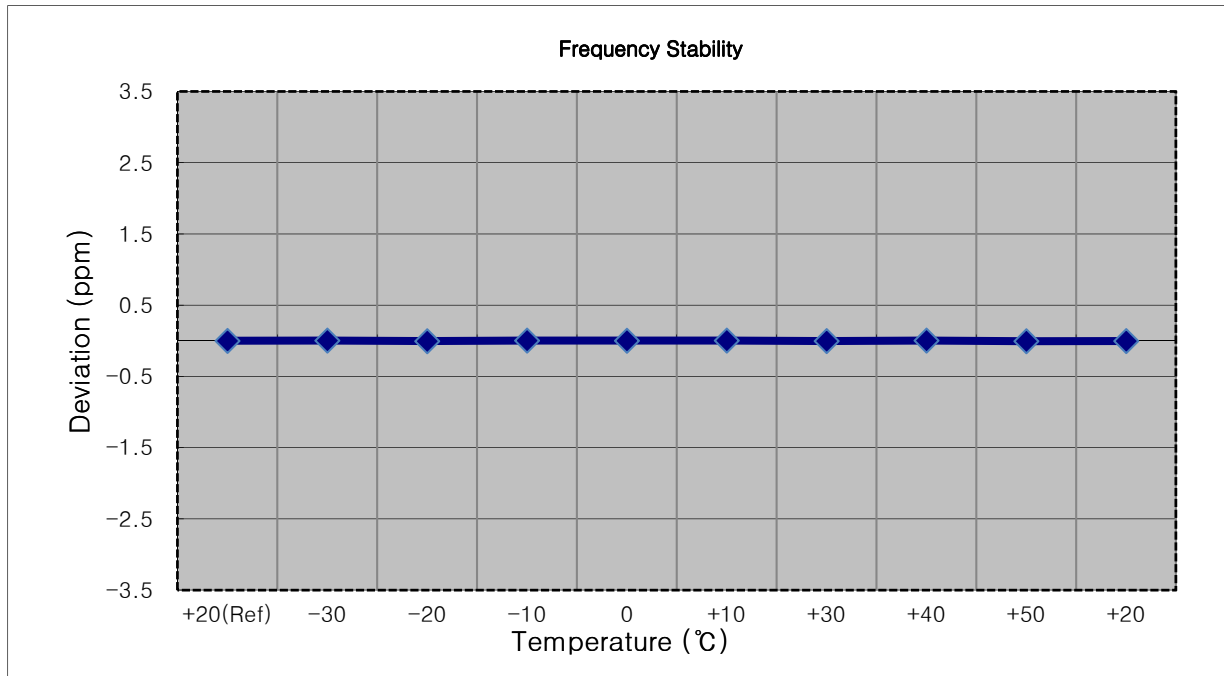

- MODE: LTE 41
- OPERATING FREQUENCY: 2506,000,000 Hz
- BANDWIDTH: 39750 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2506 000 012	0.0	0.000 000	0.000
100%		-30	2506 000 022	10.0	0.000 000	0.004
100%		-20	2506 000 019	6.6	0.000 000	0.003
100%		-10	2506 000 019	6.8	0.000 000	0.003
100%		0	2506 000 028	15.7	0.000 001	0.006
100%		+10	2506 000 019	6.5	0.000 000	0.003
100%		+30	2506 000 029	16.3	0.000 001	0.007
100%		+40	2506 000 018	5.6	0.000 000	0.002
100%		+50	2506 000 023	10.7	0.000 000	0.004
85%	3.50	+20	2506 000 027	14.3	0.000 001	0.006

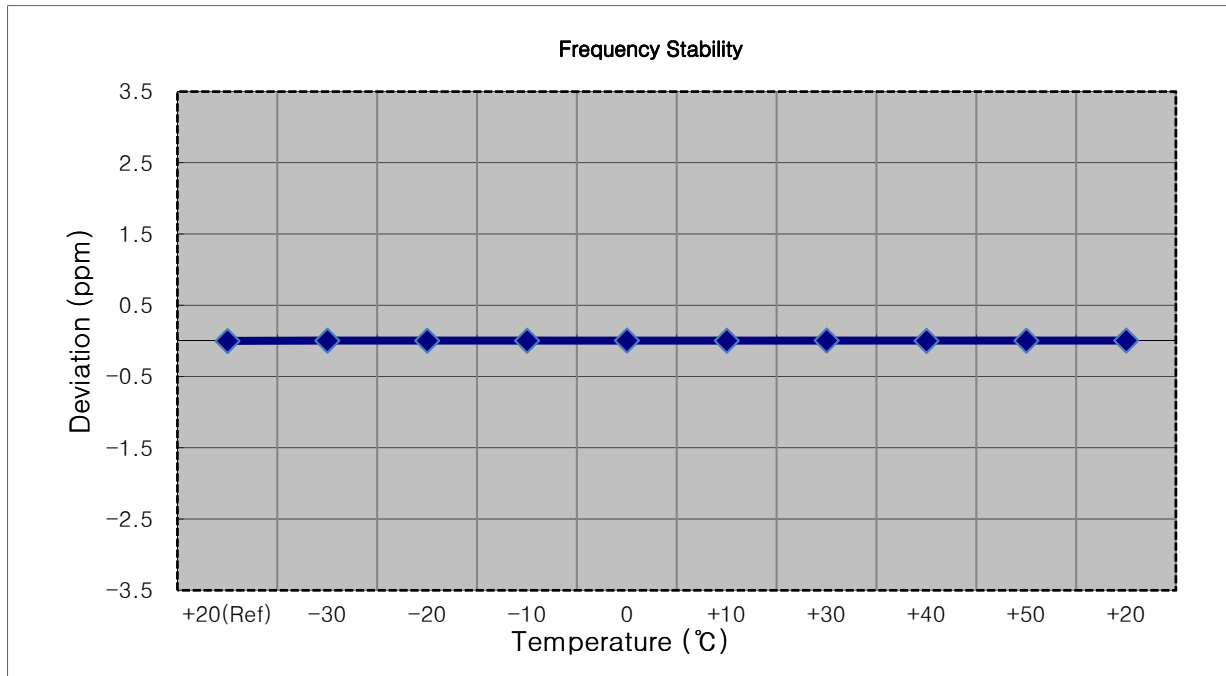




- MODE: LTE 41
- OPERATING FREQUENCY: 2593.000.000 Hz
- BANDWIDTH: 40620 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 014	0.0	0.000 000	0.000
100%		-30	2593 000 019	5.6	0.000 000	0.002
100%		-20	2593 000 009	-4.4	0.000 000	-0.002
100%		-10	2593 000 026	12.7	0.000 000	0.005
100%		0	2593 000 024	10.0	0.000 000	0.004
100%		+10	2593 000 029	15.0	0.000 001	0.006
100%		+30	2593 000 021	7.0	0.000 000	0.003
100%		+40	2593 000 018	4.4	0.000 000	0.002
100%		+50	2593 000 031	17.7	0.000 001	0.007
85%	3.50	+20	2593 000 023	9.1	0.000 000	0.004

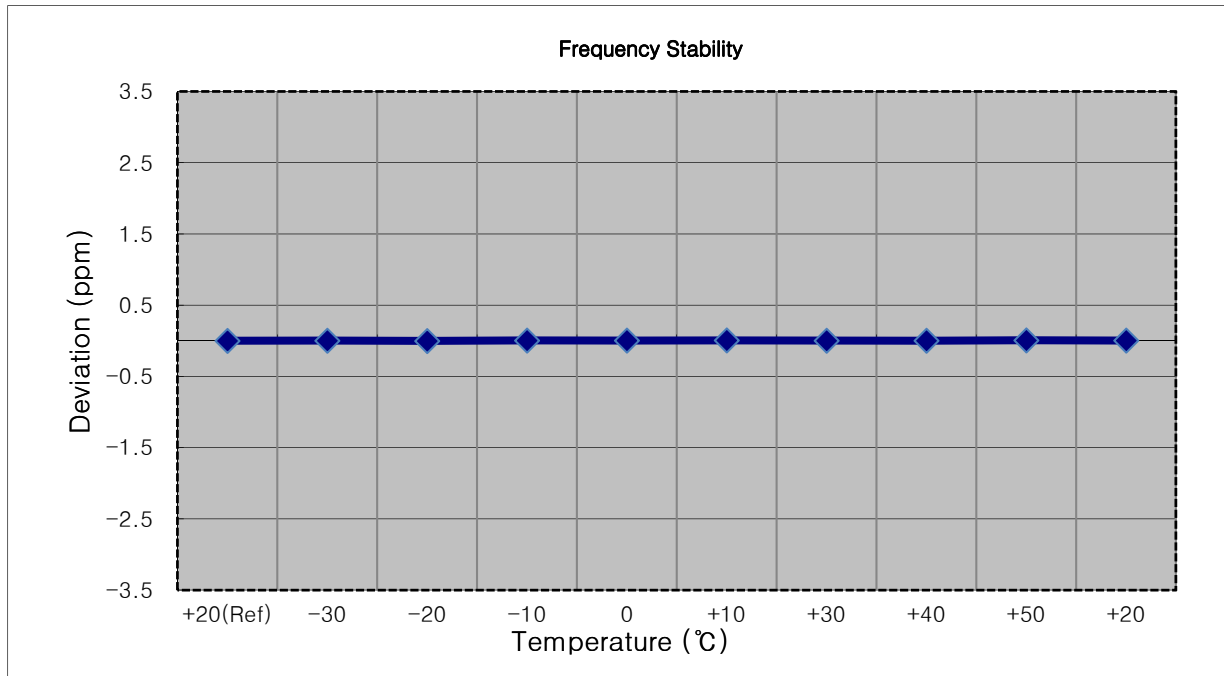


- MODE: LTE 41
- OPERATING FREQUENCY: 2593.000.000 Hz
- BANDWIDTH: 40620 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 005	0.0	0.000 000	0.000
100%		-30	2593 000 014	8.3	0.000 000	0.003
100%		-20	2593 000 016	10.8	0.000 000	0.004
100%		-10	2593 000 018	12.2	0.000 000	0.005
100%		0	2593 000 015	9.2	0.000 000	0.004
100%		+10	2593 000 020	14.7	0.000 001	0.006
100%		+30	2592 999 998	-7.5	0.000 000	-0.003
100%		+40	2593 000 021	15.6	0.000 001	0.006
100%		+50	2593 000 023	17.6	0.000 001	0.007
85%	3.50	+20	2593 000 021	15.1	0.000 001	0.006

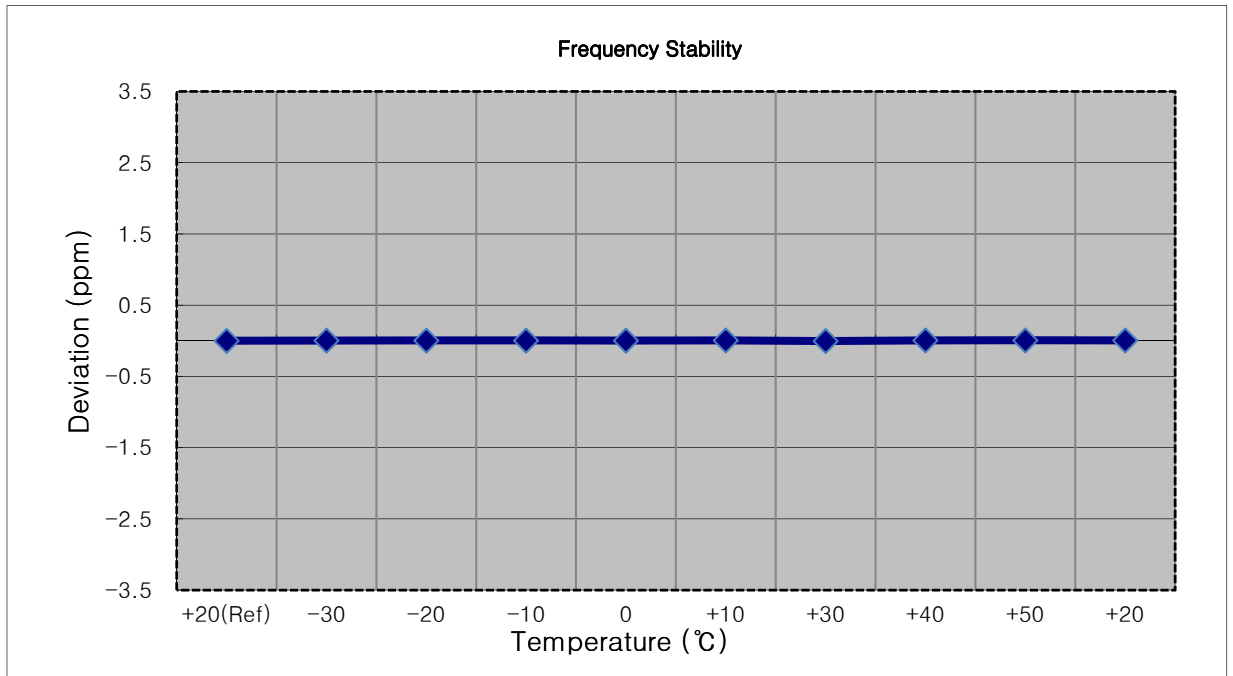


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 007	0.0	0.000 000	0.000
100%		-30	2593 000 020	13.0	0.000 001	0.005
100%		-20	2593 000 021	14.1	0.000 001	0.005
100%		-10	2593 000 021	13.6	0.000 001	0.005
100%		0	2593 000 020	12.9	0.000 000	0.005
100%		+10	2593 000 018	11.3	0.000 000	0.004
100%		+30	2593 000 020	12.6	0.000 000	0.005
100%		+40	2593 000 020	13.1	0.000 001	0.005
100%		+50	2593 000 019	11.9	0.000 000	0.005
85%	3.50	+20	2593 000 018	10.7	0.000 000	0.004

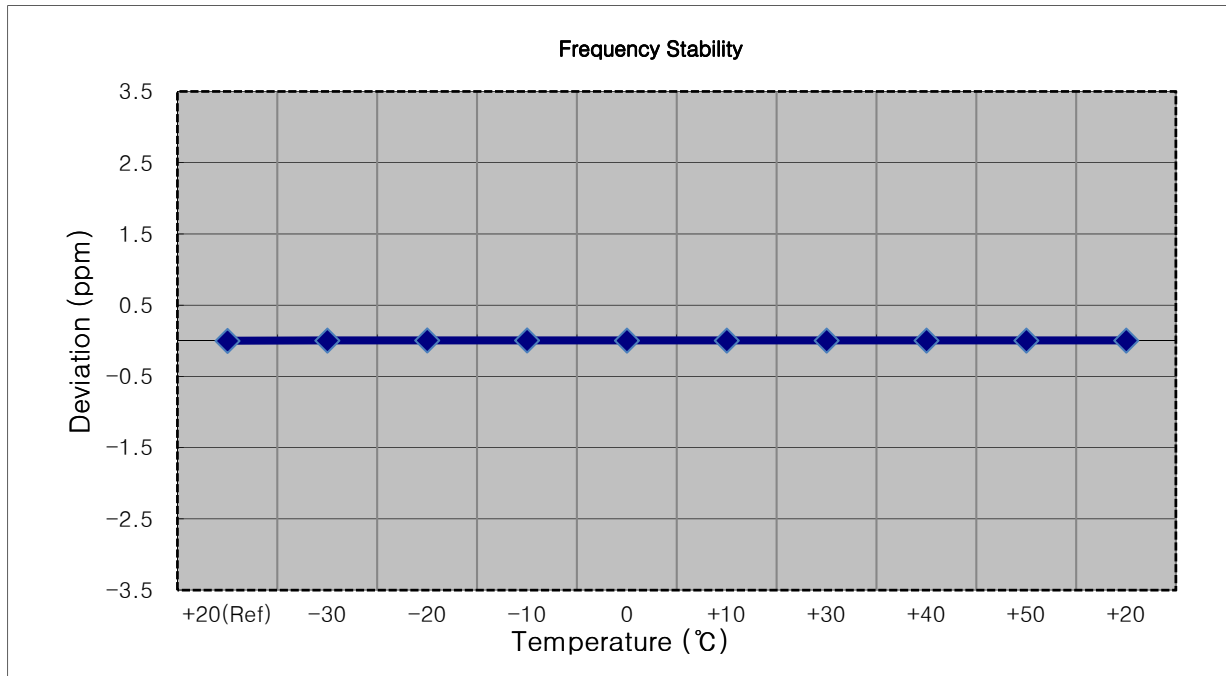


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 005	0.0	0.000 000	0.000
100%		-30	2593 000 012	7.4	0.000 000	0.003
100%		-20	2593 000 013	8.1	0.000 000	0.003
100%		-10	2593 000 013	8.6	0.000 000	0.003
100%		0	2593 000 010	5.6	0.000 000	0.002
100%		+10	2593 000 010	5.4	0.000 000	0.002
100%		+30	2593 000 010	5.5	0.000 000	0.002
100%		+40	2593 000 010	5.0	0.000 000	0.002
100%		+50	2593 000 000	2593 000 000	-4.5	0.000 000
85%	3.50	+20	2593 000 015	10.1	0.000 000	0.004

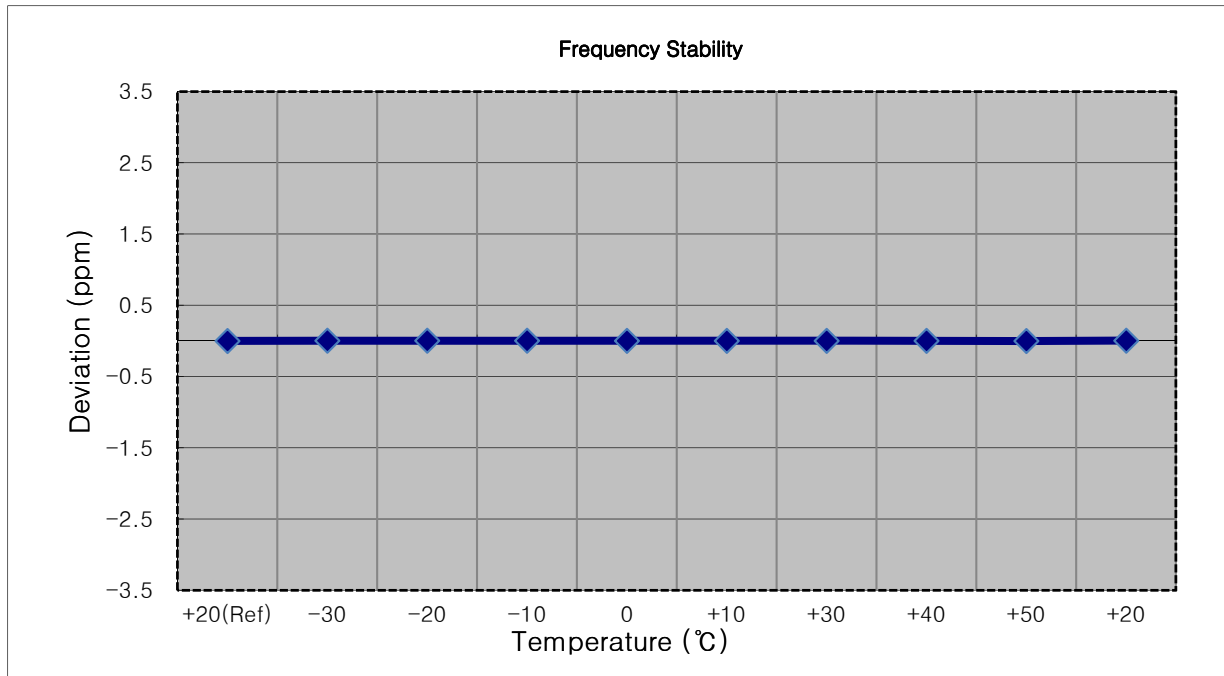


- MODE: LTE 41
- OPERATING FREQUENCY: 2687,500,000 Hz
- BANDWIDTH: 41565 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2687 500 004	0.0	0.000 000	0.000
100%		-30	2687 499 999	-4.9	0.000 000	-0.002
100%		-20	2687 499 995	-8.8	0.000 000	-0.003
100%		-10	2687 499 988	-16.2	-0.000 001	-0.006
100%		0	2687 499 989	-15.2	-0.000 001	-0.006
100%		+10	2687 499 988	-16.2	-0.000 001	-0.006
100%		+30	2687 500 009	4.7	0.000 000	0.002
100%		+40	2687 499 992	-12.4	0.000 000	-0.005
100%		+50	2687 499 993	-10.8	0.000 000	-0.004
85%	3.50	+20	2687 499 988	-16.5	-0.000 001	-0.006

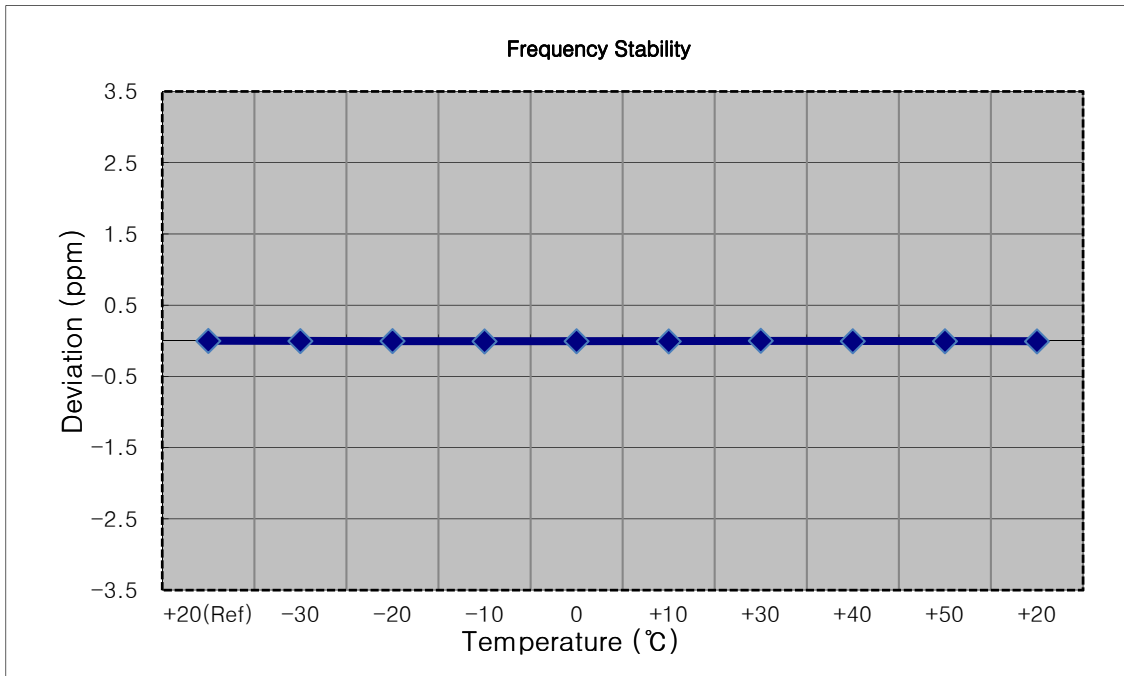


- MODE: LTE 41
- OPERATING FREQUENCY: 2685,000,000 Hz
- BANDWIDTH: 41540 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2684 999 989	0.0	0.000 000	0.000
100%		-30	2684 999 976	-13.1	0.000 000	-0.005
100%		-20	2684 999 977	-11.7	0.000 000	-0.004
100%		-10	2684 999 983	-6.5	0.000 000	-0.002
100%		0	2684 999 977	-11.9	0.000 000	-0.004
100%		+10	2684 999 980	-9.1	0.000 000	-0.003
100%		+30	2684 999 996	6.7	0.000 000	0.002
100%		+40	2684 999 978	-11.1	0.000 000	-0.004
100%		+50	2684 999 980	-9.3	0.000 000	-0.003
85%	3.50	+20	2684 999 995	5.7	0.000 000	0.002

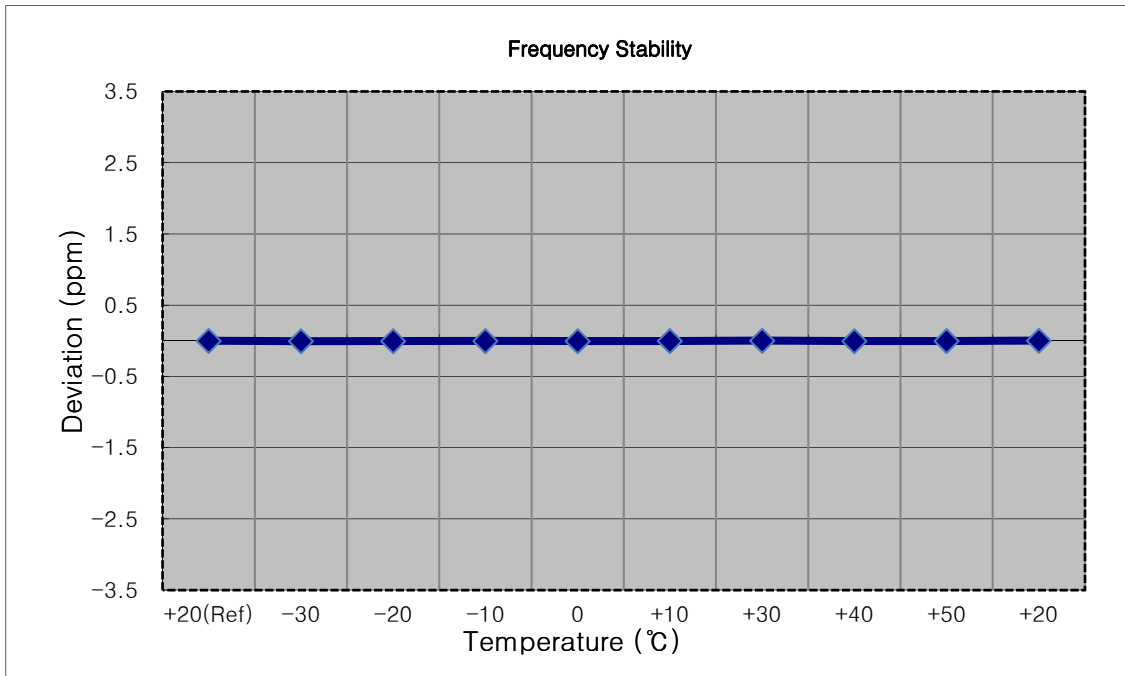


- MODE: LTE 41
- OPERATING FREQUENCY: 2682,500,000 Hz
- BANDWIDTH: 41515 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2682 499 992	0.0	0.000 000	0.000
100%		-30	2682 499 976	-15.9	-0.000 001	-0.006
100%		-20	2682 499 975	-17.0	-0.000 001	-0.006
100%		-10	2682 499 984	-7.8	0.000 000	-0.003
100%		0	2682 499 975	-16.7	-0.000 001	-0.006
100%		+10	2682 499 982	-10.1	0.000 000	-0.004
100%		+30	2682 499 979	-13.1	0.000 000	-0.005
100%		+40	2682 499 979	-12.8	0.000 000	-0.005
100%		+50	2682 499 971	-21.1	-0.000 001	-0.008
85%	3.50	+20	2682 499 980	-11.7	0.000 000	-0.004

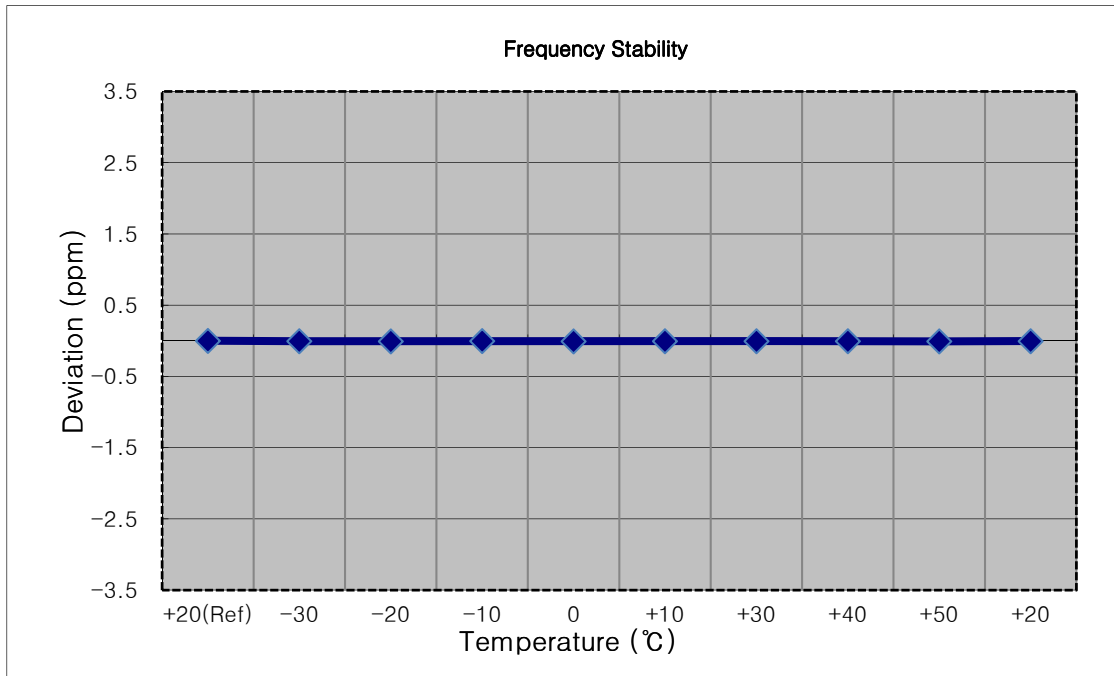

- MODE: LTE 41
- OPERATING FREQUENCY: 2680,000,000 Hz
- BANDWIDTH: 41490 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2680 000 013	0.0	0.000 000	0.000
100%		-30	2680 000 028	14.7	0.000 001	0.005
100%		-20	2680 000 033	19.6	0.000 001	0.007
100%		-10	2680 000 029	15.4	0.000 001	0.006
100%		0	2680 000 029	15.9	0.000 001	0.006
100%		+10	2680 000 033	19.5	0.000 001	0.007
100%		+30	2680 000 004	-8.9	0.000 000	-0.003
100%		+40	2680 000 027	13.9	0.000 001	0.005
100%		+50	2680 000 031	17.5	0.000 001	0.007
85%	3.50	+20	2680 000 024	10.8	0.000 000	0.004

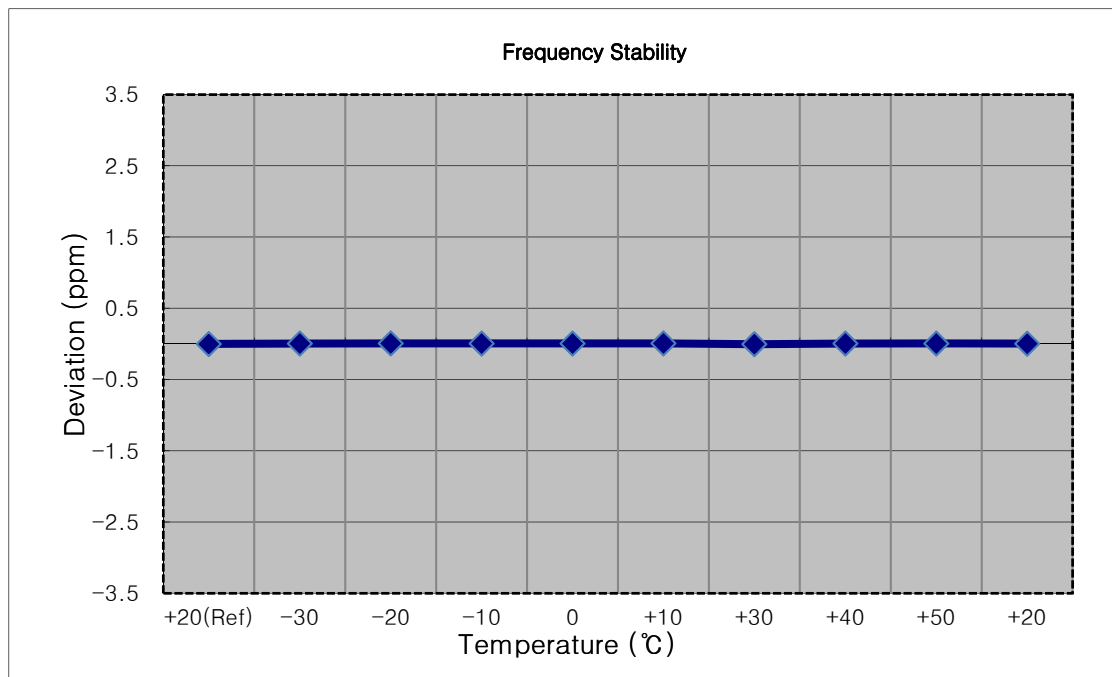



## 8.7 GEO-LOCATION MECHANISM

The device uses a geo-location mechanism based on the cellular MCC codes in order to only enable certain LTE bands when the device is not in the USA.

The validation of this mechanism is provided below. The device was configured for cellular communications to a test set and the MCC code was adjusted on the test set between the US MCC and then an MCC code valid for a country where the LTE band is supported.

Band	MCC = USA	MCC = non US
7	Did not connect	Connected (Canada)
38	Did not connect	Connected (Canada)
40	Did not connect	Connected (Canada)
41	Connected	Connected (Canada)

The verification tests confirmed the operational of the geo-location mechanism.

**Verification test**

**Connected(LTE B7)  
(MCC = Canada)**

2018/11/22 16:37 Connected  
 <Fundamental Measurement> Output Main Continuous Phone-2 LTE Phone-1 LTE

Parameter Fundamental UE Report Band Cal.

Measuring UE Power : 20.7 dBm  
 (Meas. Count : 10 / 10)

Modulation Analysis View

Carrier Frequency Avg. 2534.999998 MHz

Carrier Frequency Error	Avg.	Max.	Min.	Limit
	-0.0016	0.0014	-0.0053	kHz

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	302
MNC	220
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number P0250  
 Authentication On

Parameter

- Common
- Physical Channel
- Call Processing
- TX Measurement Setup
- RX Measurement Setup
- Fundamental Measurement

1 | 2 | 3 | 4

**Connected(LTE B38)**  
**(MCC = Canada)**

2018/11/22 16:36      Connected      Phone-2      Phone-1  
<Fundamental Measurement> Output Main      Continuous      LTE      LTE

Parameter      Fundamental      UE Report      Band Cal.

Measuring      UE Power :      22.3 dBm

Modulation Analysis      View      (Meas. Count :      10 /      10)

Carrier Frequency      Avg.      2594.999993 MHz

Carrier Frequency Error	Avg.	Max.	Min.	Limit
	-0.0071	-0.0033	-0.0102	kHz
	0.00	0.00	0.00	ppm

**Call Processing Parameter**

Base Station Identity

Cell ID	0
MCC	302
MNC	220
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number      P0250

Authentication      On

Parameter

- Common
- Physical Channel
- Call Processing
- TX Measurement Setup
- RX Measurement Setup
- Fundamental Measurement

1 | 2 | 3 | 4

**Connected(LTE B40)**  
**(MCC = Canada)**

2018/11/22 16:36 Connected  
<Fundamental Measurement> Output Main Continuous Phone-2 LTE Phone-1 LTE

Parameter Fundamental UE Report

Measuring UE Power : 23.6 dBm  
(Meas. Count : 10 / 10)

Modulation Analysis View

Carrier Frequency 2350.000011 MHz

Carrier Frequency Error	Avg.	Max.	Min.	Limit
0.0113	0.0128	0.0076		

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	302
MNC	220
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number P0250  
Authentication On

Parameter list on the right: Common, Physical Channel, Call Processing, TX Measurement Setup, RX Measurement Setup, Fundamental Measurement.

**Connected(LTE B41)**  
**(MCC = Canada)**

2018/11/22 16:36 Connected Phone-2 Phone-1  
<Fundamental Measurement> Output Main Continuous LTE LTE

Parameter Fundamental UE Report Band Cal

Measuring UE Power : 22.9 dBm

Modulation Analysis View (Meas. Count : 10 / 10)

Carrier Frequency	Avg. 2593.000010 MHz		
Carrier Frequency Error	Avg. 0.0096	Max. 0.0131	Min. 0.0068 kHz
	0.00	0.04	0.00 ppm

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	302
MNC	220
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number P0250

Authentication On

Parameter Common Physical Channel Call Processing TX Measurement Setup RX Measurement Setup Fundamental Measurement

1 2 3 4

**Did not connect (LTE B7)**  
**(MCC = US)**

2018/11/22 16:39 Idle  
<Fundamental Measurement> Output Main Continuous Phone-2 LTE Phone-1 LTE

Parameter Fundamental UE Report Band Cal.

**Reference Signal not found** UE Power : -22.3 dBm

Modulation Analysis **View** (Meas. Count : 1 / 10)

Carrier Frequency Avg. \*\*\*\*\* MHz

Carrier Frequency Error Avg. Max. Min. Limit \*\*\*\*\* kHz

**Call Processing Parameter**

Base Station Identity

Cell ID	0
MCC	311
MNC	01
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number P0250  
Authentication On

Parameter  
Common  
Physical Channel  
Call Processing  
TX Measurement Setup  
RX Measurement Setup  
Fundamental Measurement

1 2 3 4

**Did not connect (LTE B38)**  
**(MCC = US)**

2018/11/22 16:40 Idle Phone-2 Phone-1  
<Fundamental Measurement> Output Main Continuous LTE LTE

Parameter Fundamental UE Report

**Reference Signal not found** UE Power : -21.9 dBm

Modulation Analysis View (Meas. Count : 1/ 10)

Avg. Carrier Frequency \*\*\*\*\* MHz

Avg. Max. Min. Limit Carrier Frequency Error \*\*\*\*\* kHz

**Call Processing Parameter**

Base Station Identity

Cell ID	0
MCC	311
MNC	01
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number P0250

Authentication On

Parameter

- Common
- Physical Channel
- Call Processing
- TX Measurement Setup
- RX Measurement Setup
- Fundamental Measurement

1 | 2 | 3 | 4

**Did not connect (LTE B40)**  
**(MCC = US)**

2018/11/22 16:40      Idle      Phone-2      Phone-1  
<Fundamental Measurement> Output Main Continuous      LTE      LTE

Parameter      Fundamental      UE Report

Reference Signal not found      UE Power :      -21.9 dBm      Parameter

Modulation Analysis      View      (Meas. Count :      1/ 10)

Avg.

Carrier Frequency      \*\*\*\*\*      MHz

Avg.      Max.      Min.      Limit

Carrier Frequency Error      \*\*\*\*\*      \*\*\*\*\*      \*\*\*\*\*      kHz

\*\*\*\*\*      \*\*\*\*\*      \*\*\*\*\*      ppm

**Call Processing Parameter**

Base Station Identity

Cell ID      0

MCC      311

MNC      01

TAC      0001 H

Mobile Station Identity

IMSI      001010123456789

Paging IMSI      Auto

C-RNTI      AAAA H

Temporary C-RNTI for Handover      AAAA H

SIM Model Number      P0250

Authentication      On

1 | 2 | 3 | 4

Parameter

Common

Physical Channel

Call Processing

TX Measurement Setup

RX Measurement Setup

Fundamental Measurement



**Connected(LTE B41)**  
**(MCC = US)**

2018/11/22 16:39 Connected Phone-2 Phone-1  
<Fundamental Measurement> Output Main Continuous LTE LTE

Parameter Fundamental UE Report

**Measuring** UE Power : 22.8 dBm  
(Meas. Count : 10/ 10)

Modulation Analysis **View**

Carrier Frequency Avg. 2593.000005 MHz

Carrier Frequency Error	Avg.	Max.	Min.	Limit
	0.0048	0.0089	0.0005	
	0.00	0.00	0.00	0.00

**Call Processing Parameter**

Base Station Identity

Cell ID 0

MCC 311

MNC 01

TAC 0001 H

Mobile Station Identity

IMSI 001010123456789

Paging IMSI Auto

C-RNTI AAAA H

Temporary C-RNTI for Handover AAAA H

SIM Model Number P0250

Authentication On


Parameter

- Common
- Physical Channel
- Call Processing
- TX Measurement Setup
- RX Measurement Setup
- Fundamental Measurement


1 | 2 | 3 | 4

## **9. TEST PLOTS**


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25)

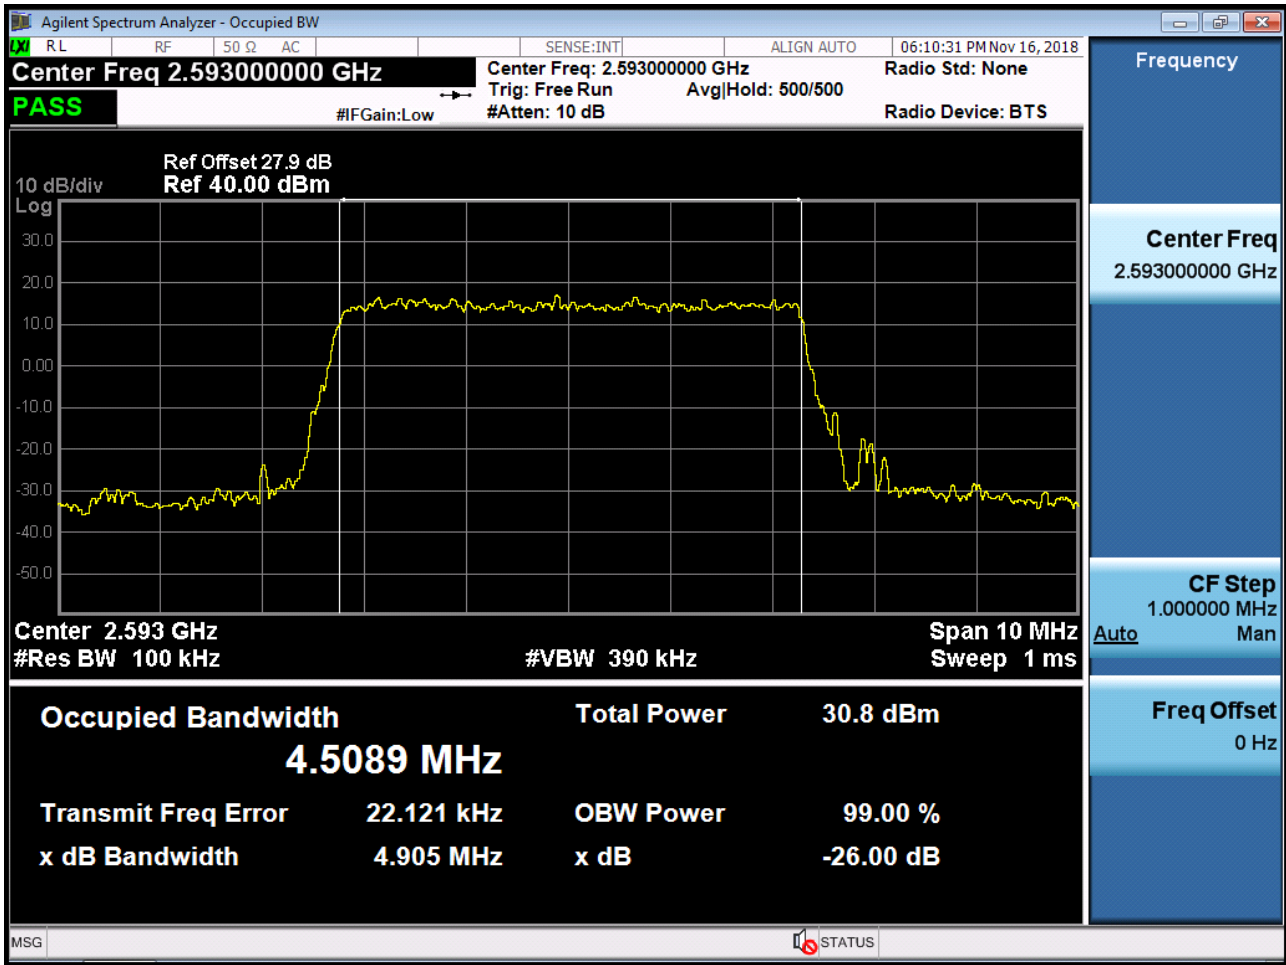


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25)

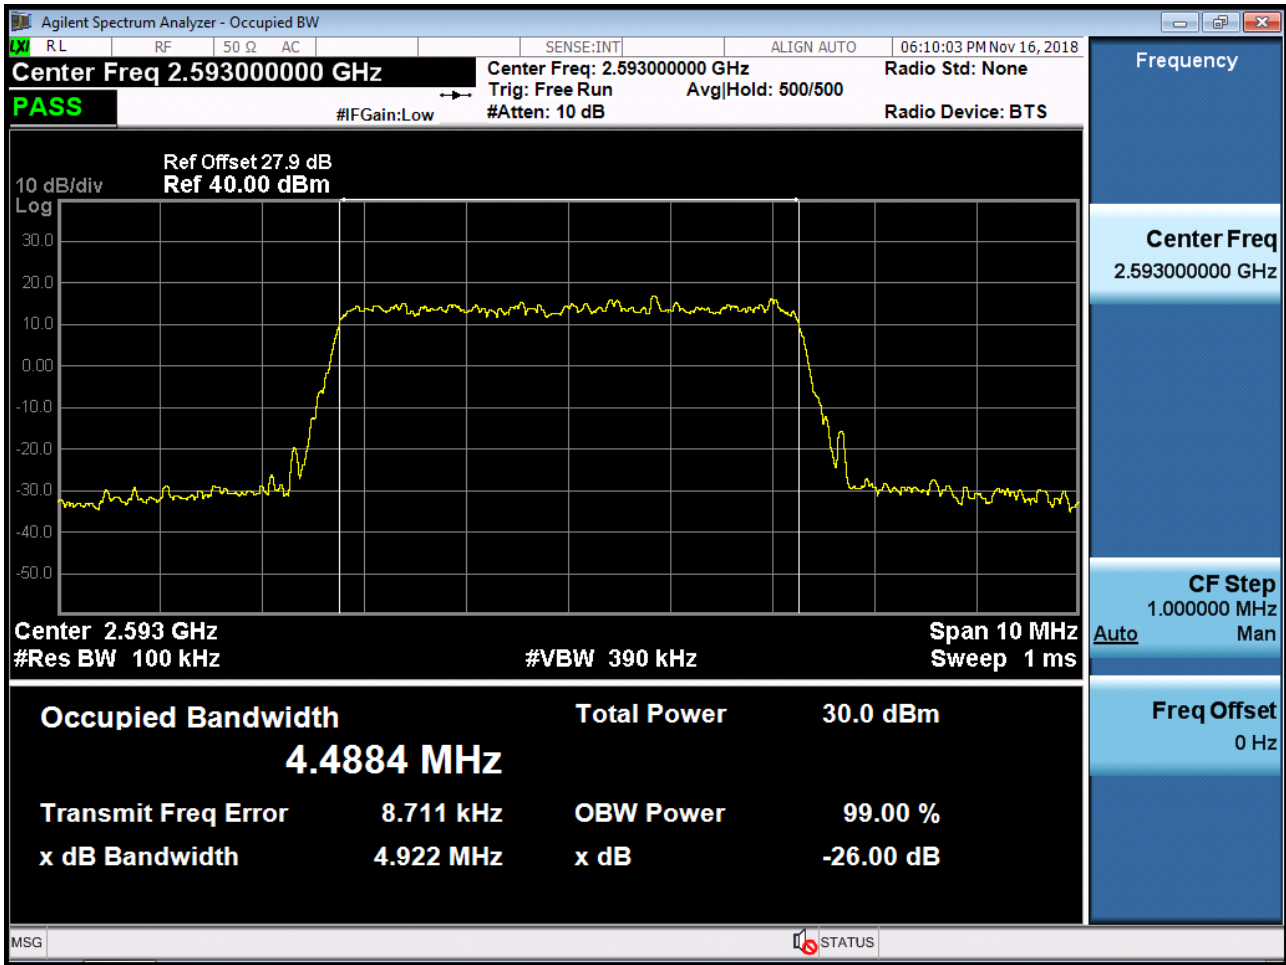


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 64-QAM RB 25)

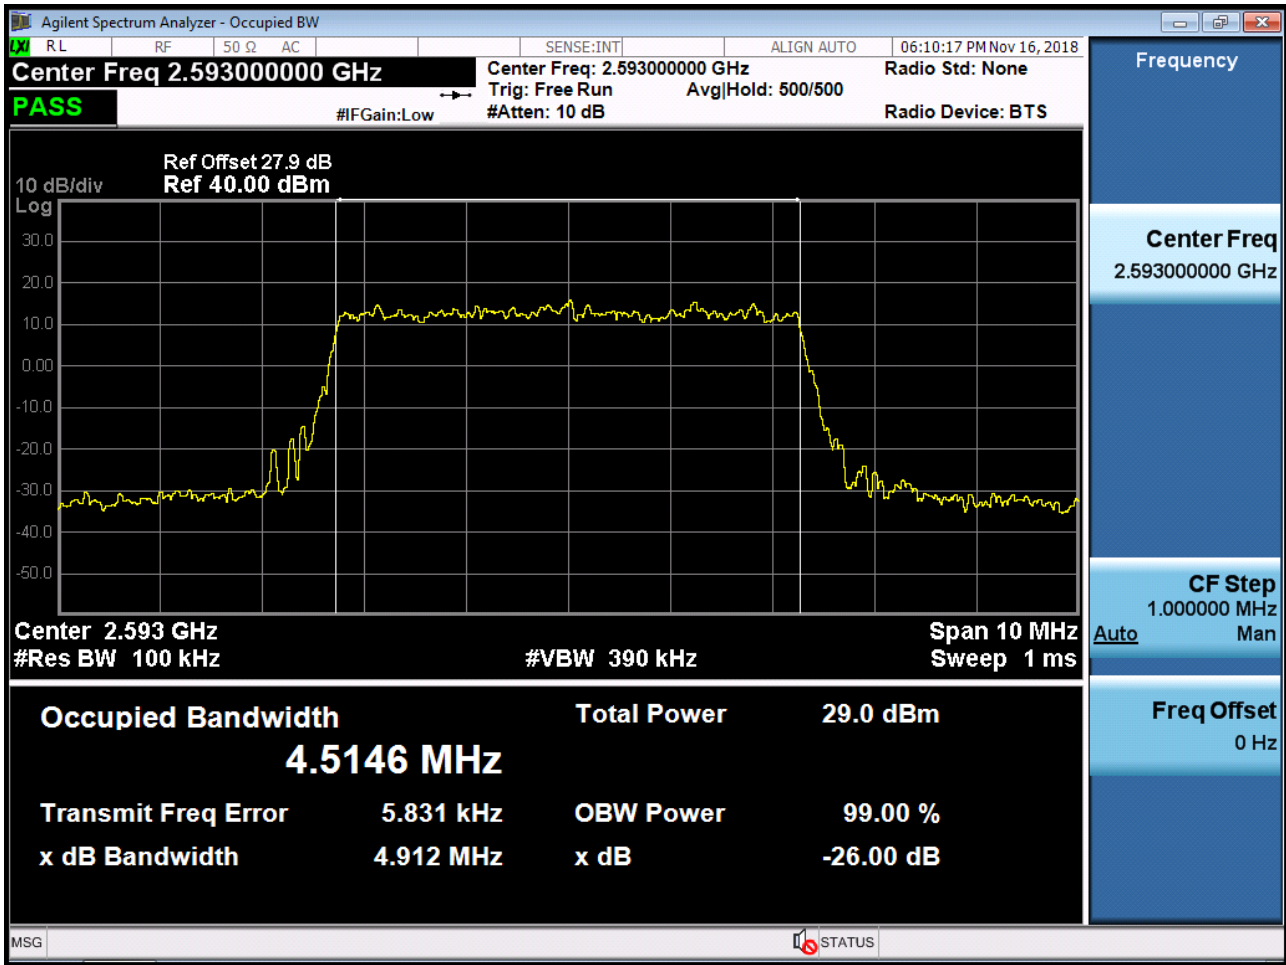


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50)

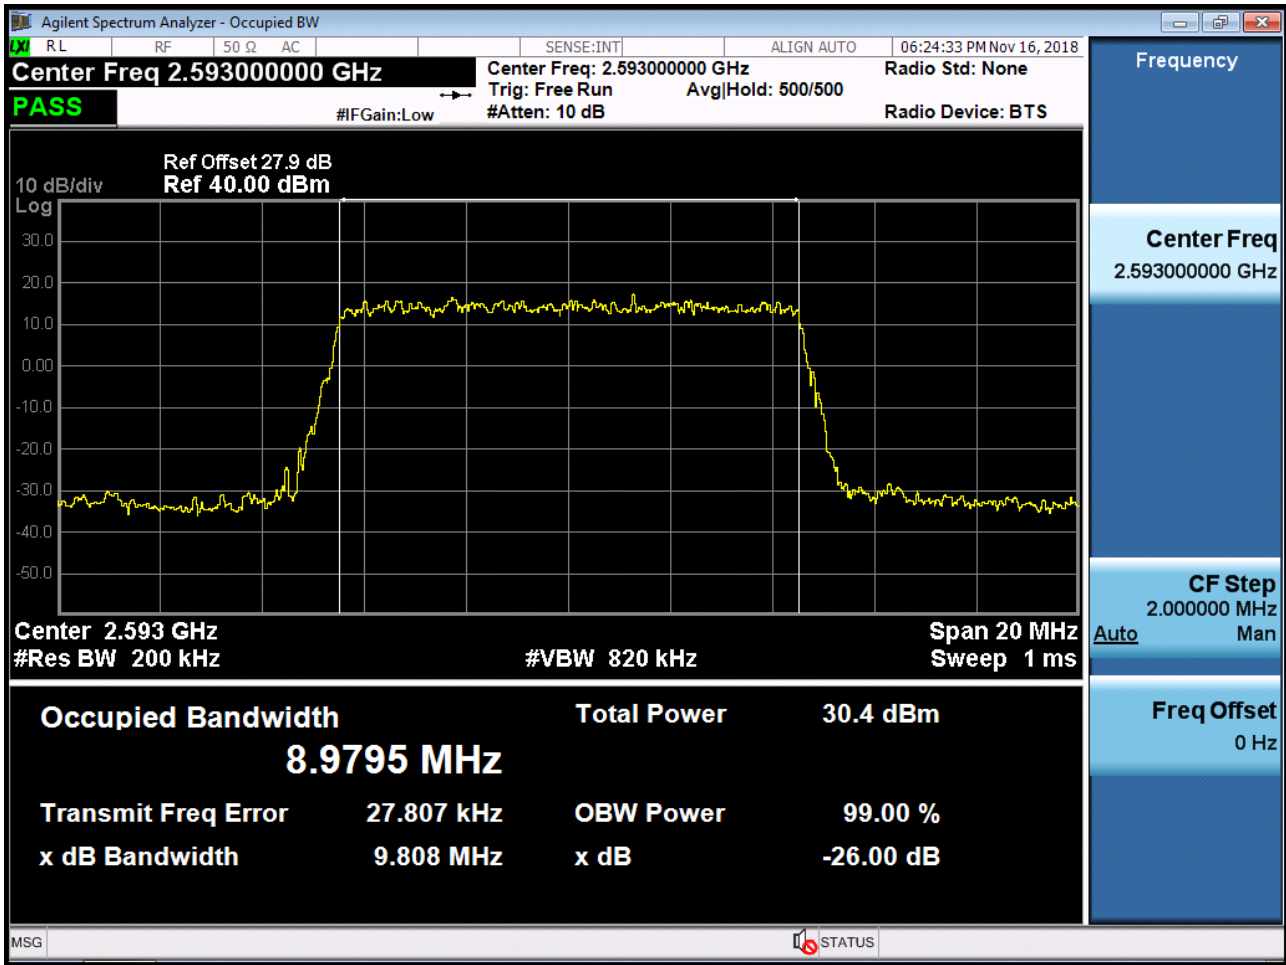

BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50)

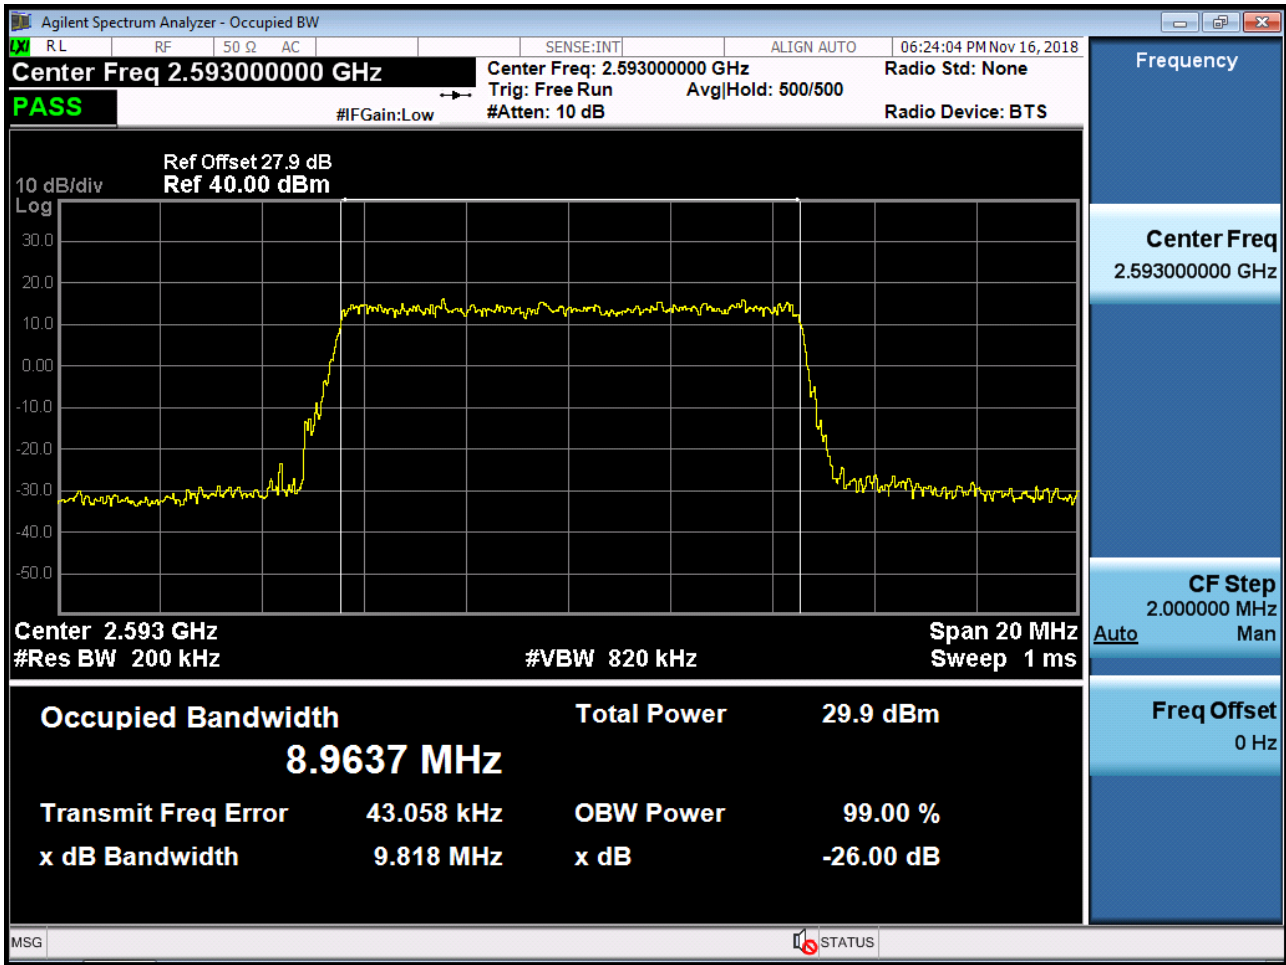


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 64-QAM RB 50)

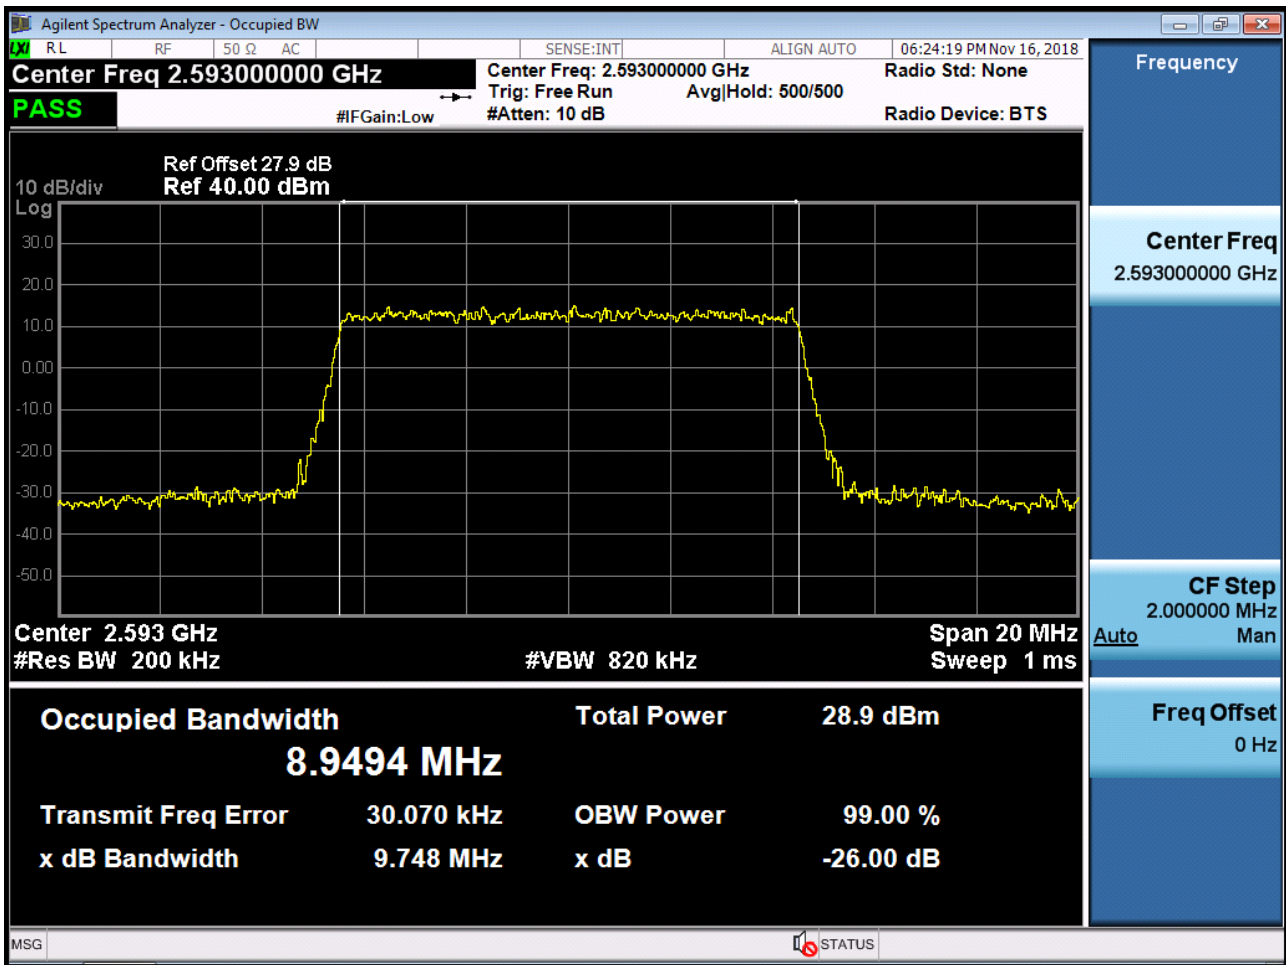





BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75)

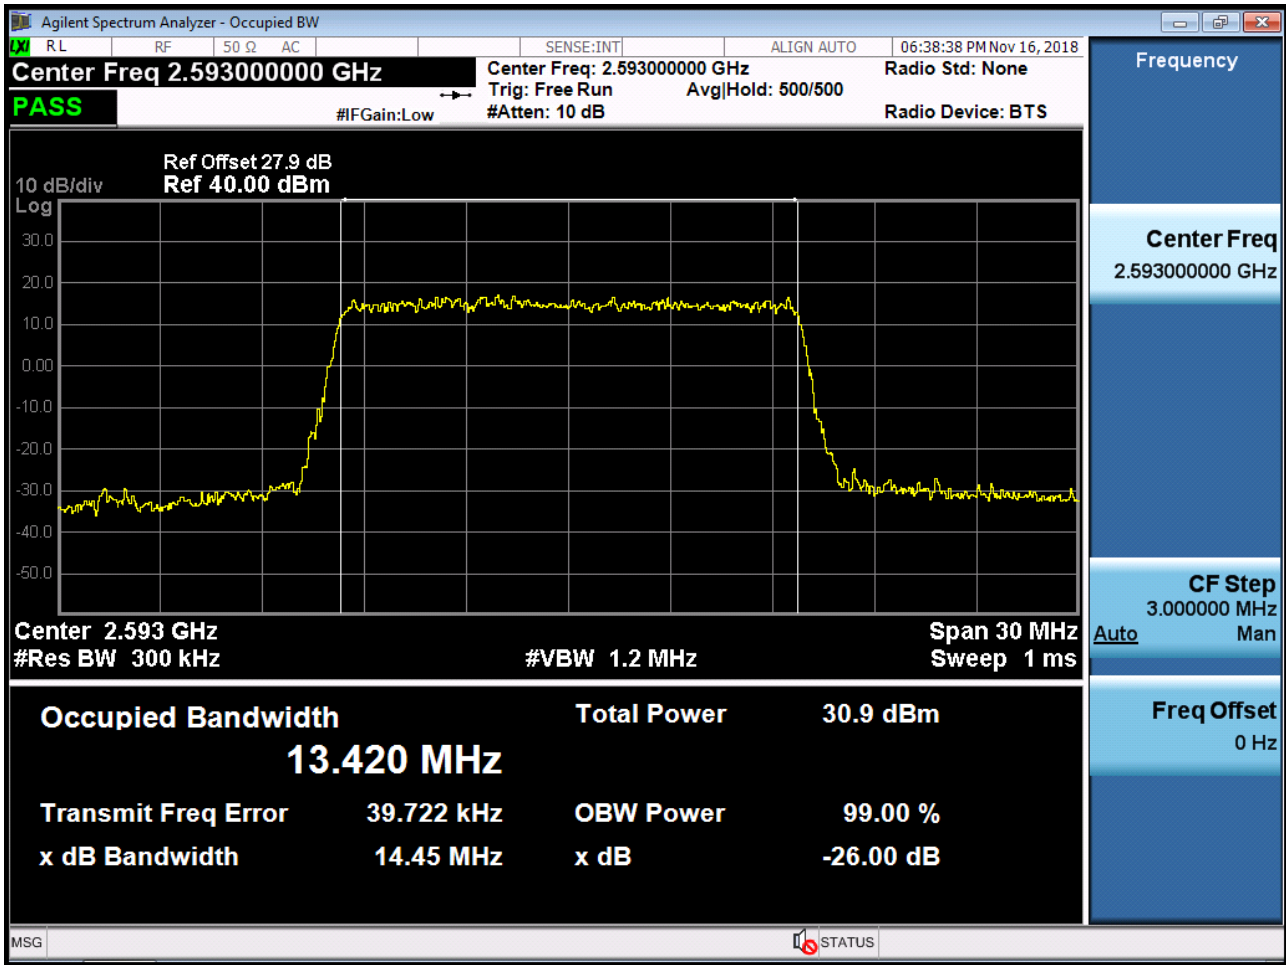


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75)

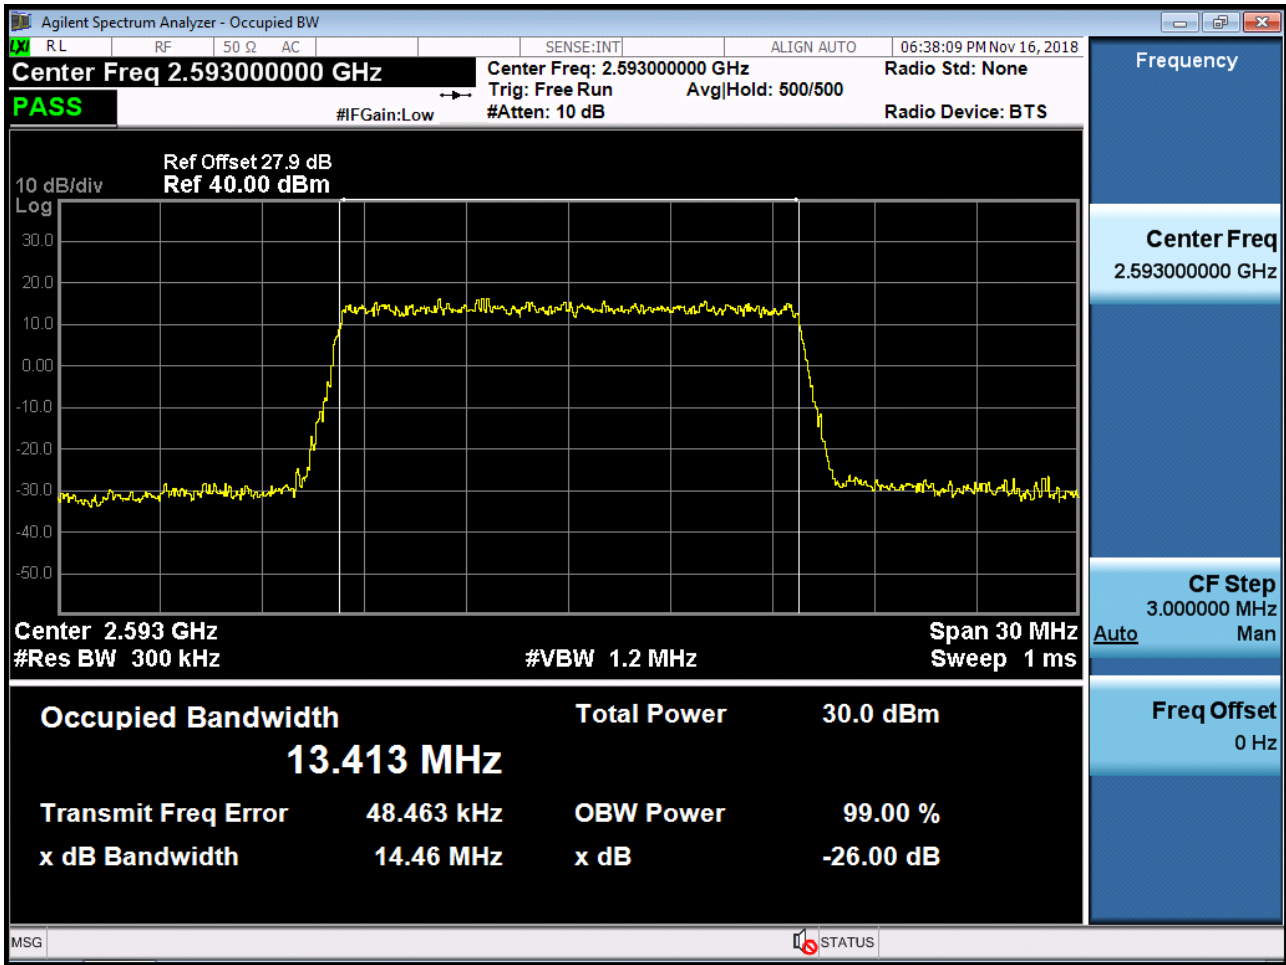


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 64-QAM RB 75)

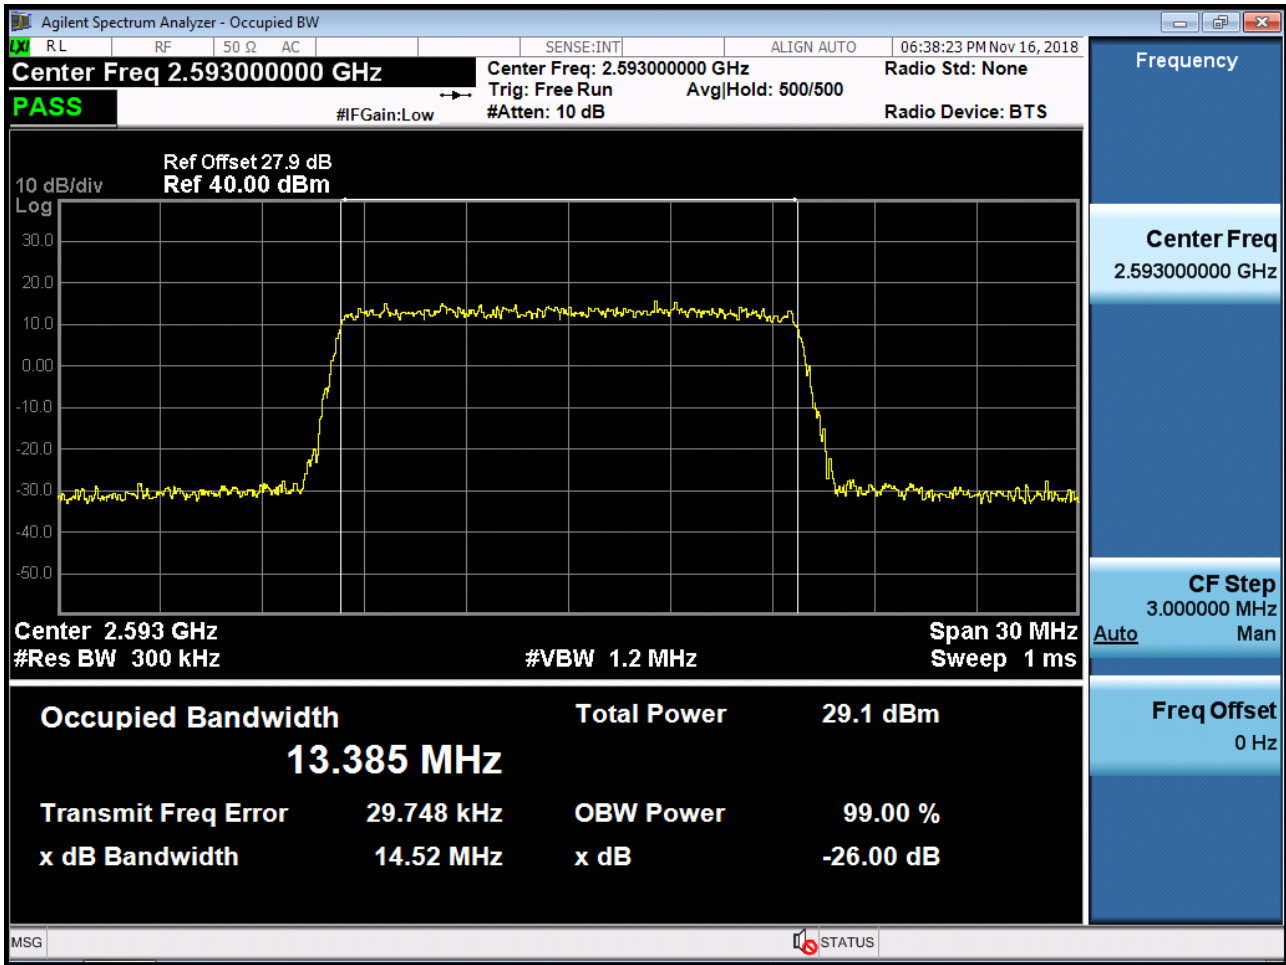


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100)

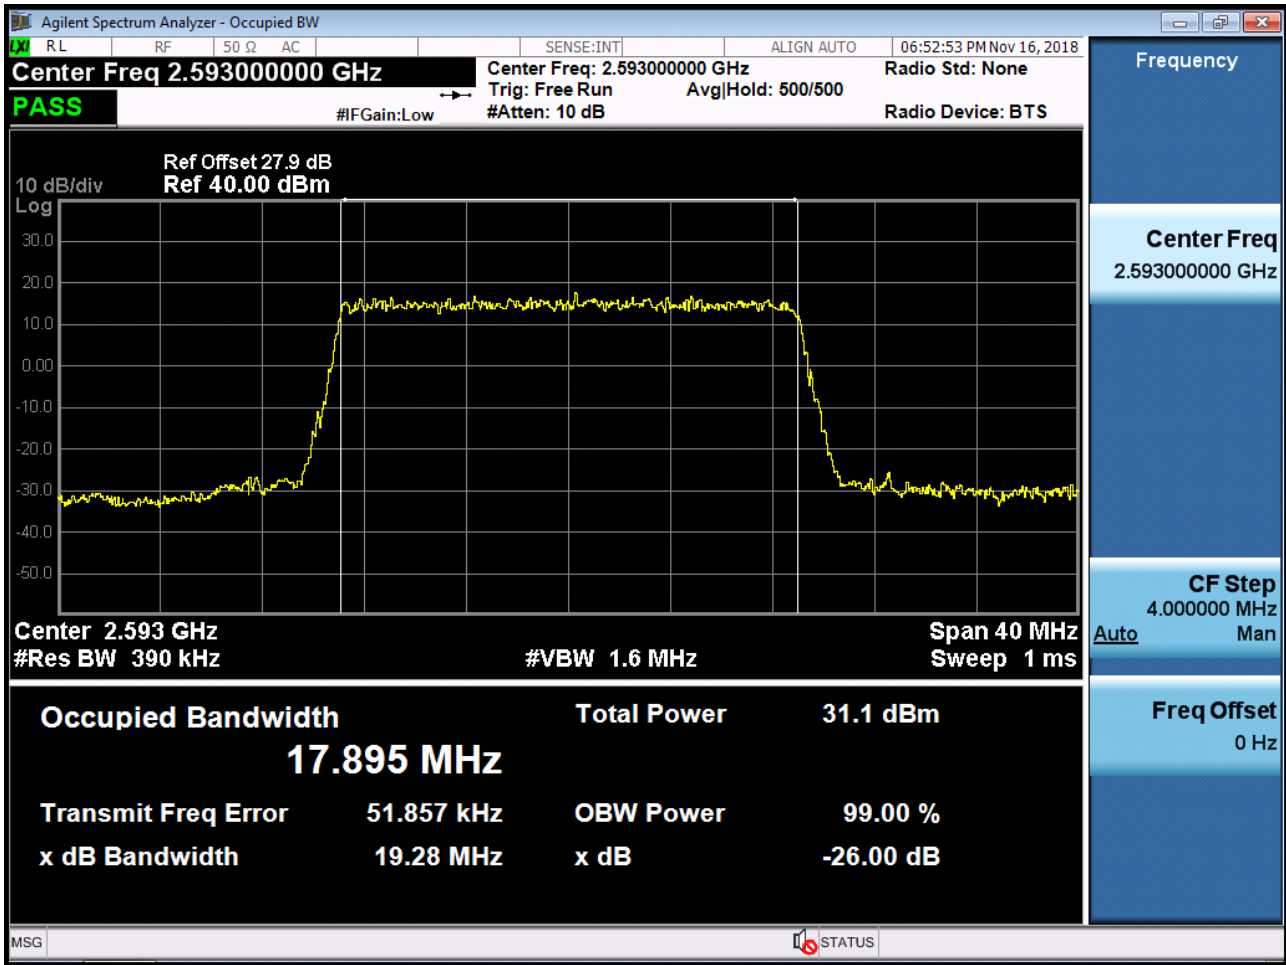


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100)

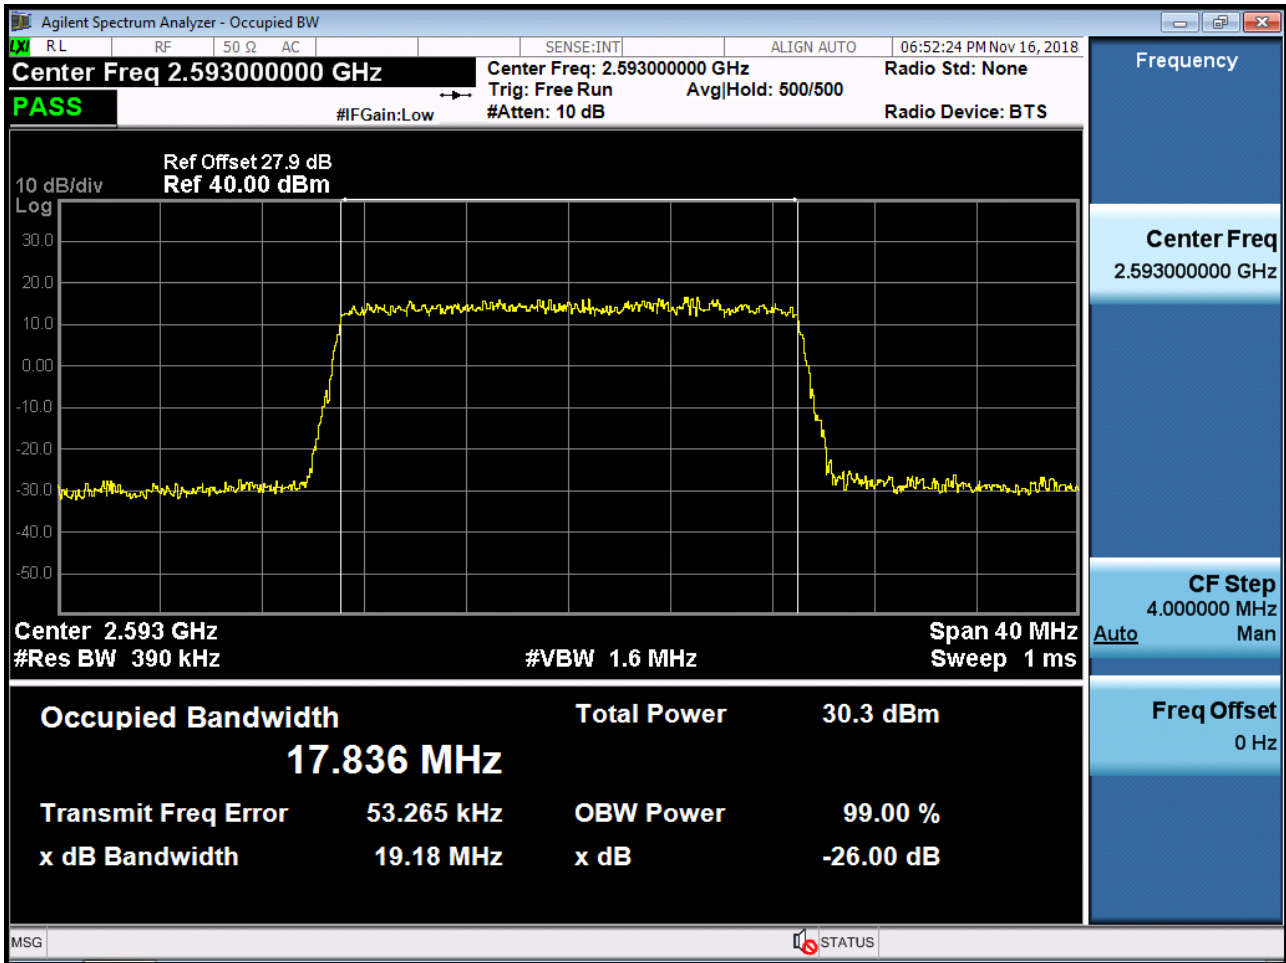


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 64-QAM RB 100)

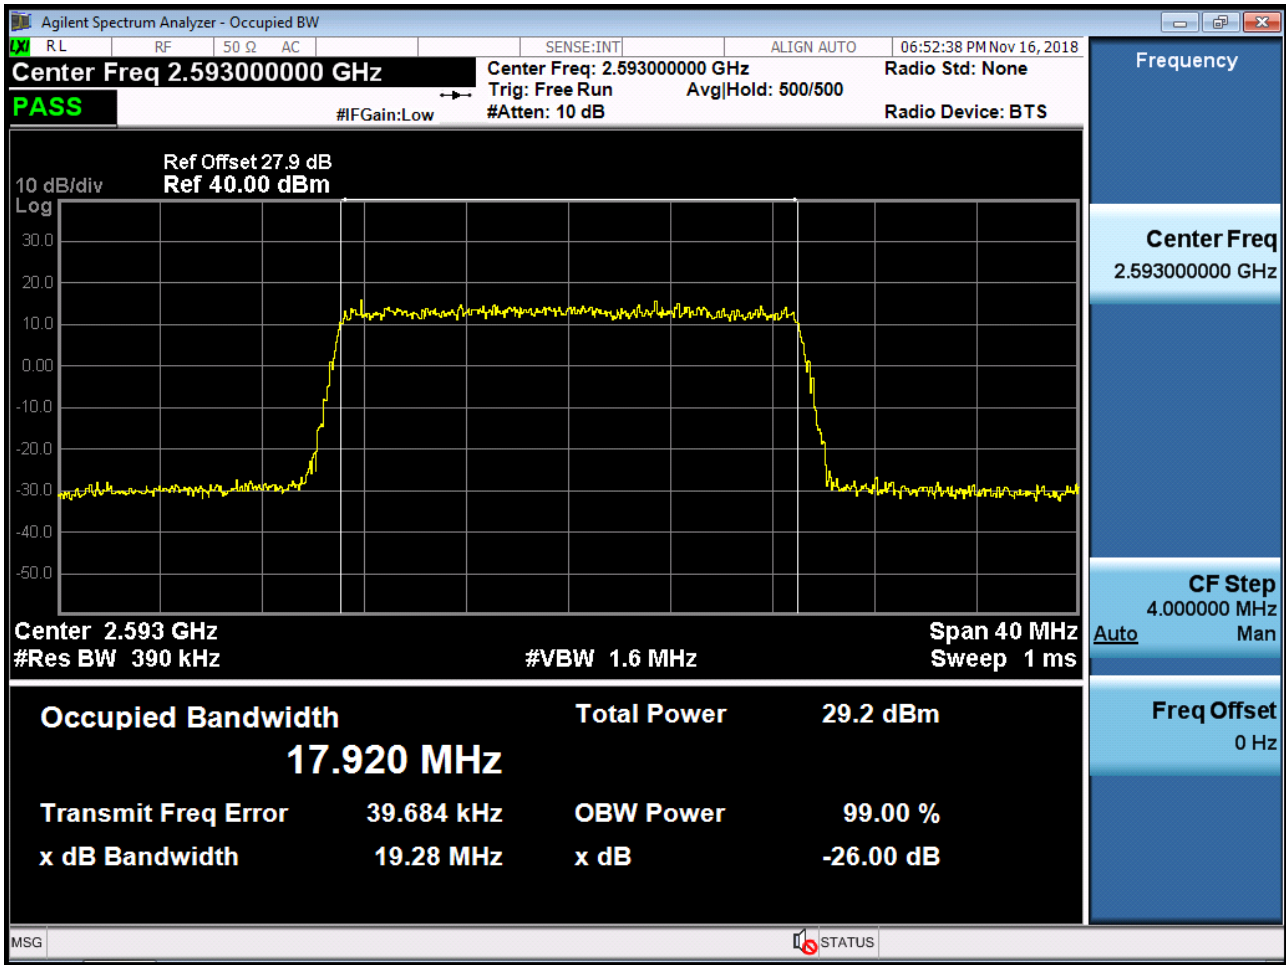

BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0)-1

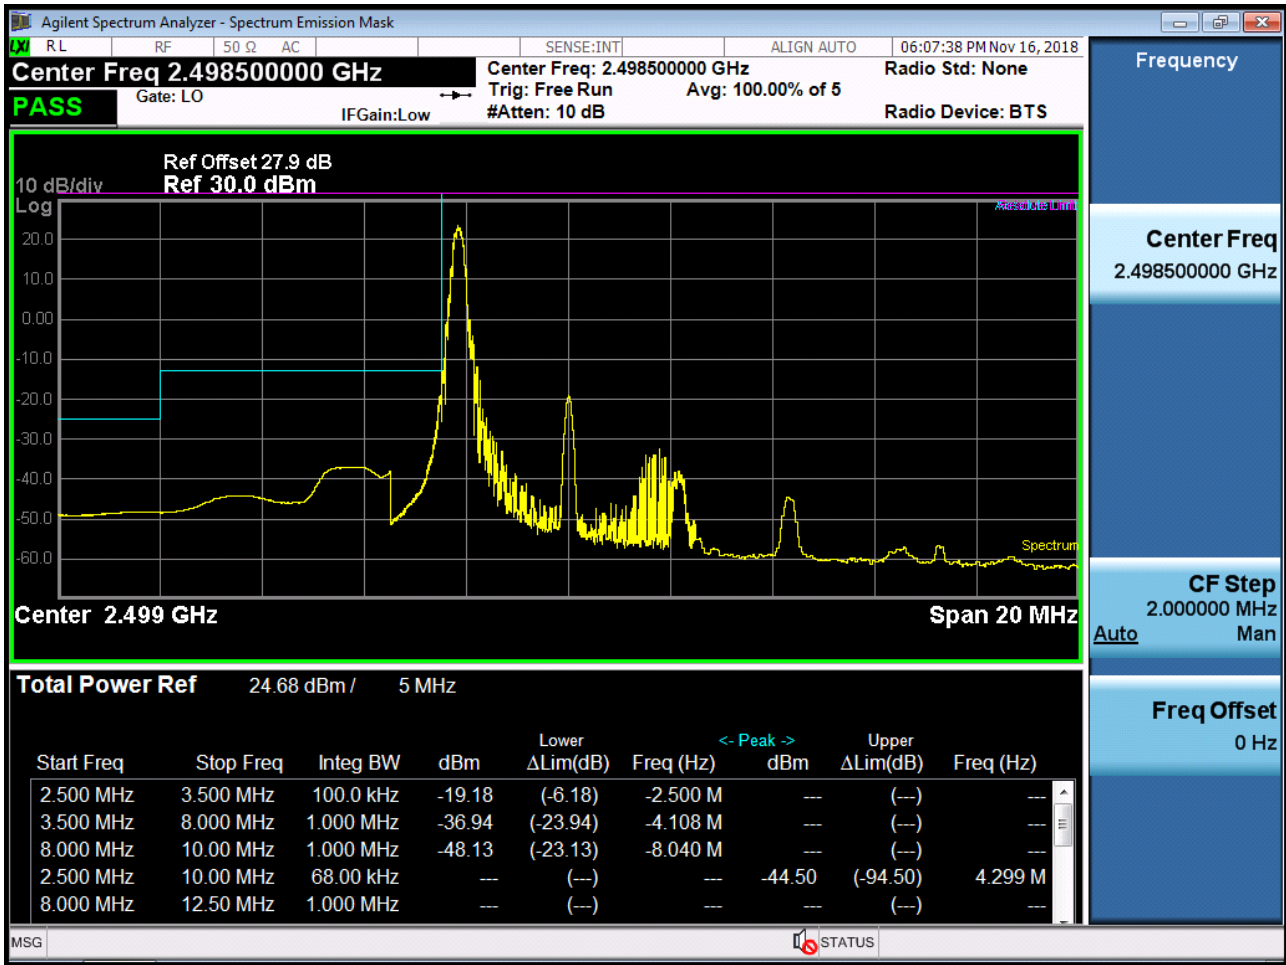


BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0)-2

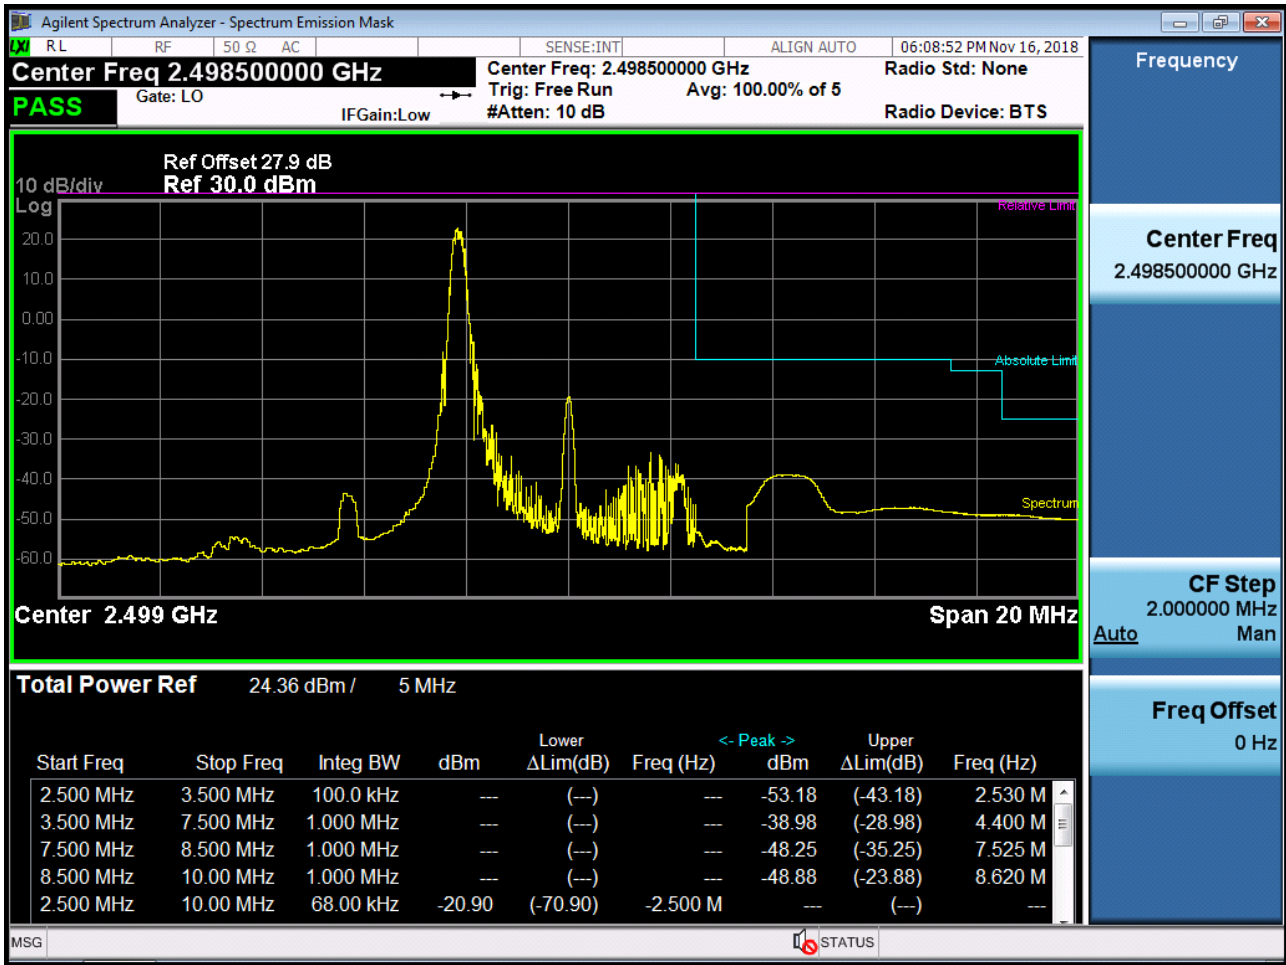





BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK\_RB25\_Offset 0)-1

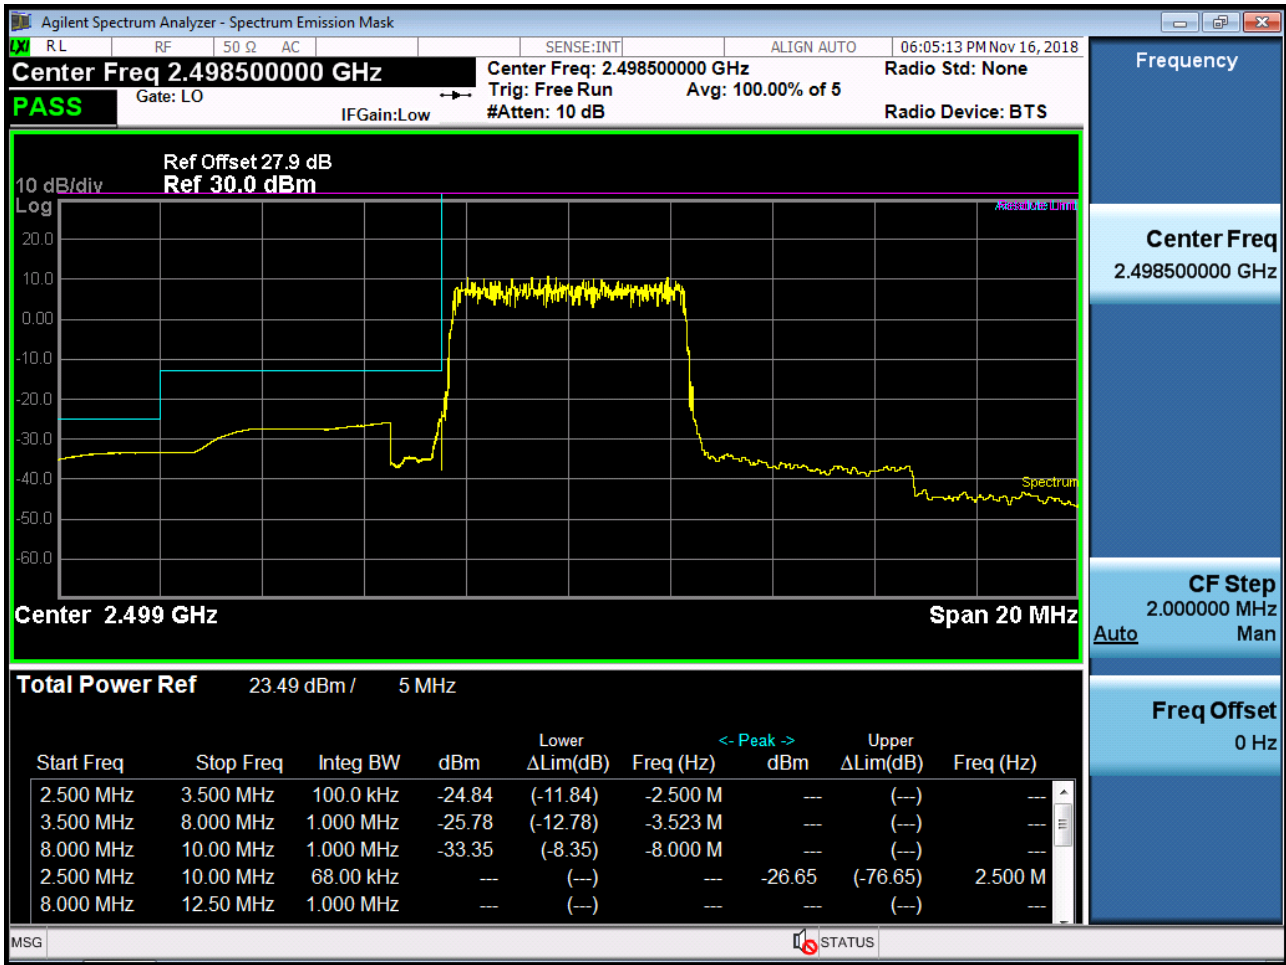


BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK\_RB25\_Offset 0)-2

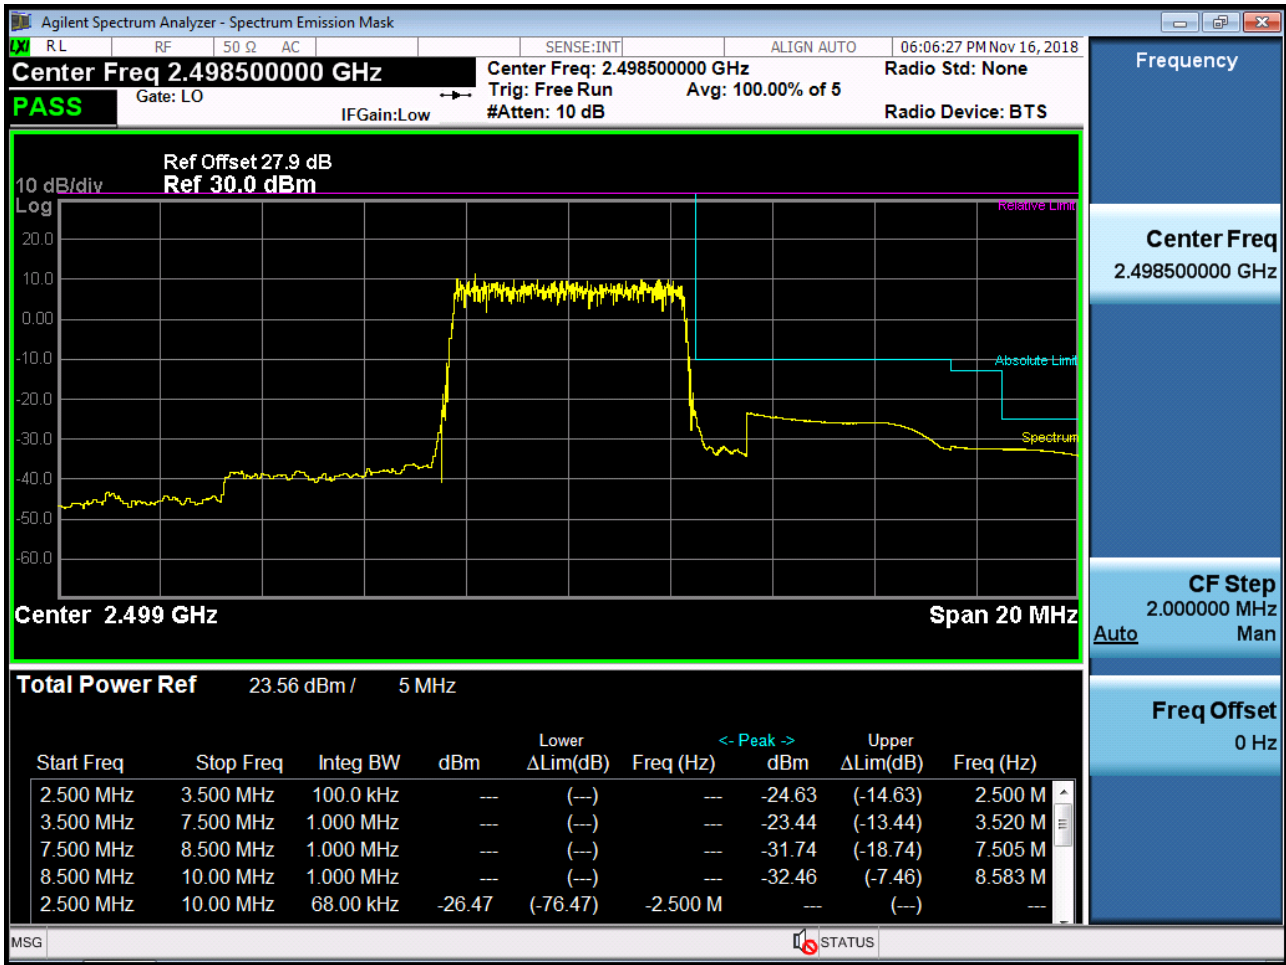


BAND 41. Mid Channel Edge Plot (5 MHz Ch.40620 QPSK RB 25)

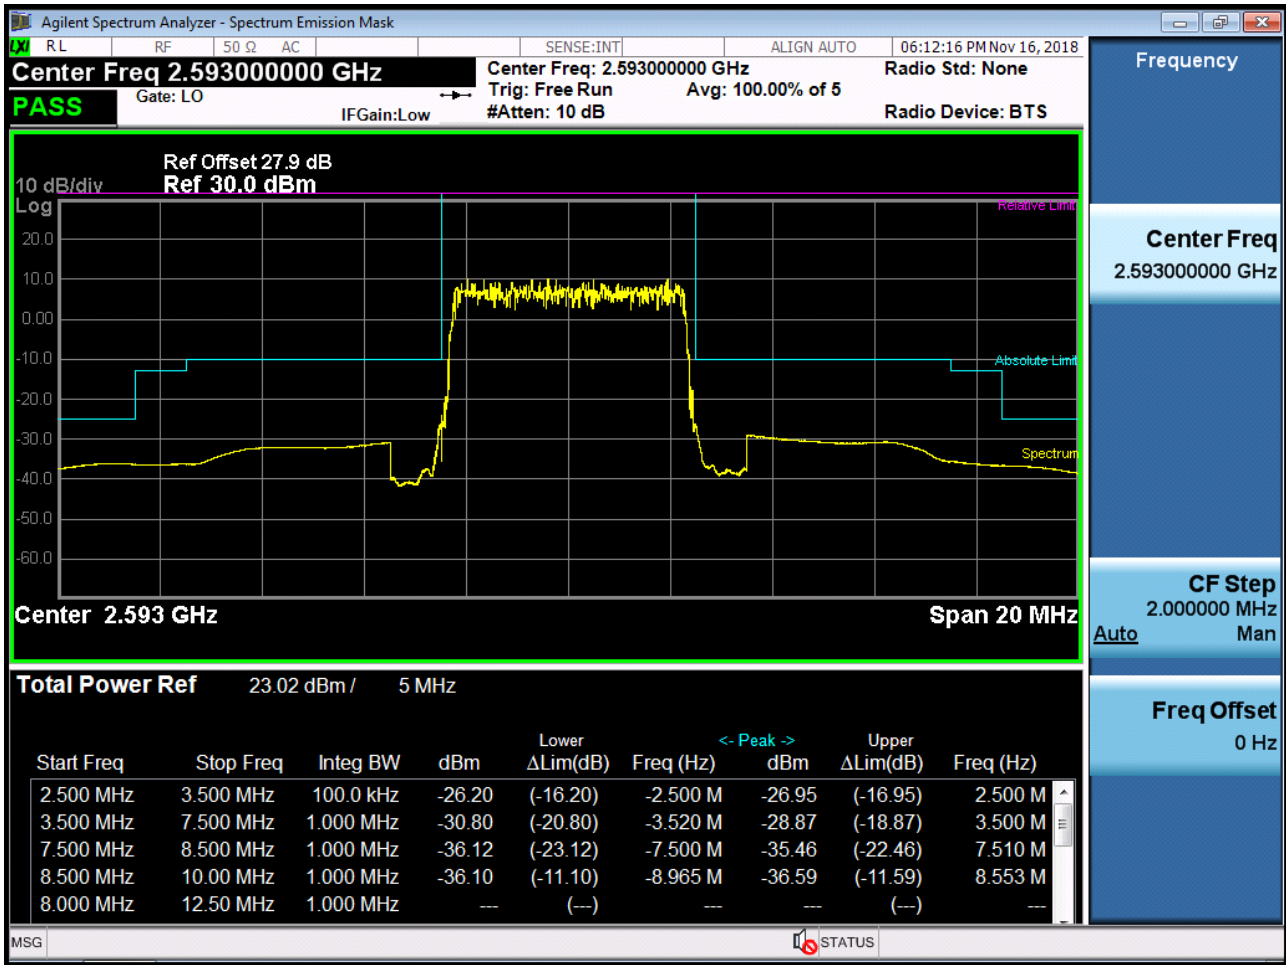


BAND 41. High Channel Edge Plot (5 MHz Ch.41565 QPSK RB 1, Offset 0)

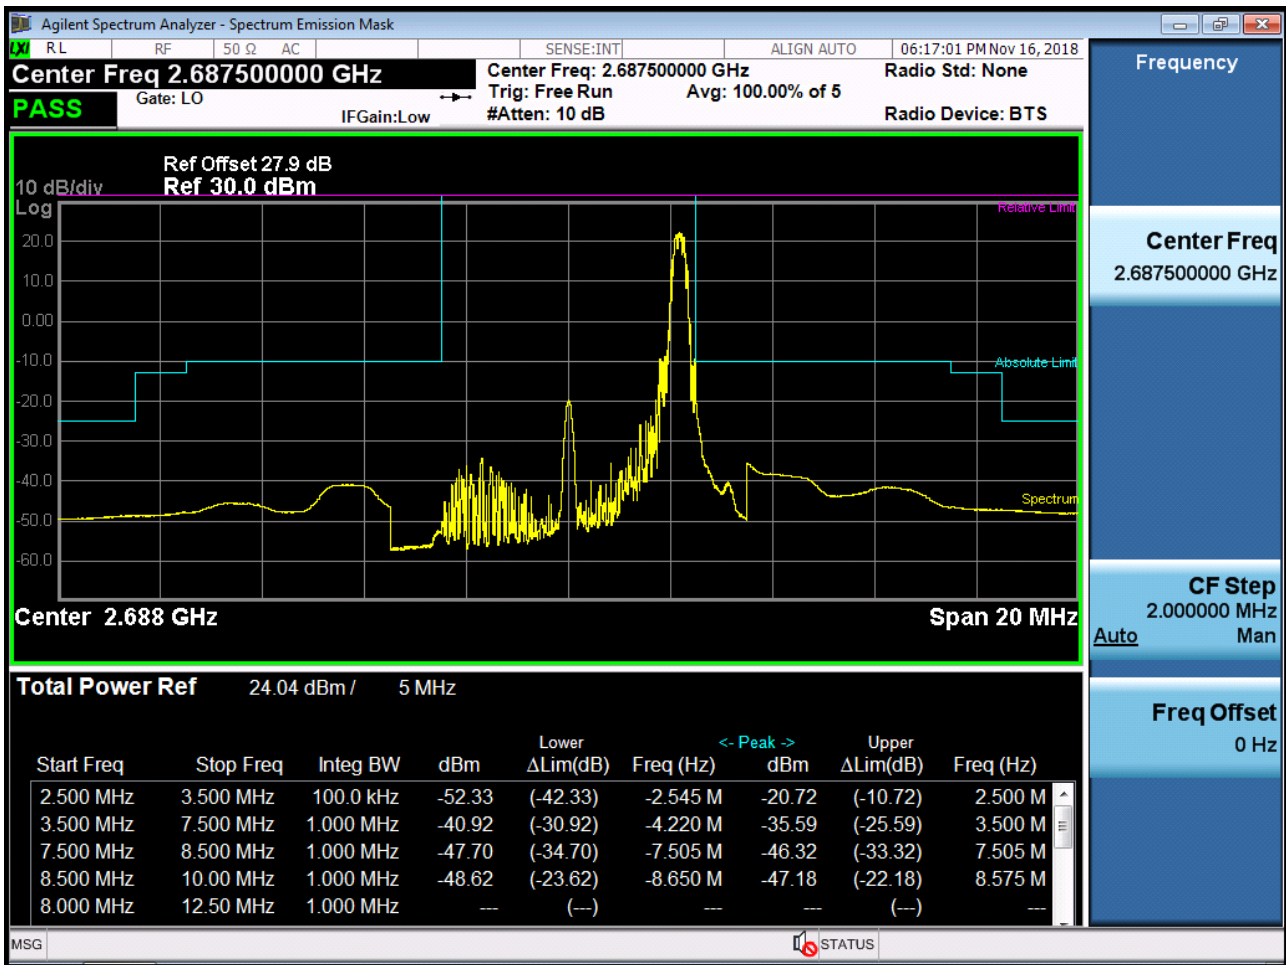


BAND 41. High Channel Edge Plot (5 MHz Ch.41565 QPSK\_RB25\_Offset 0)

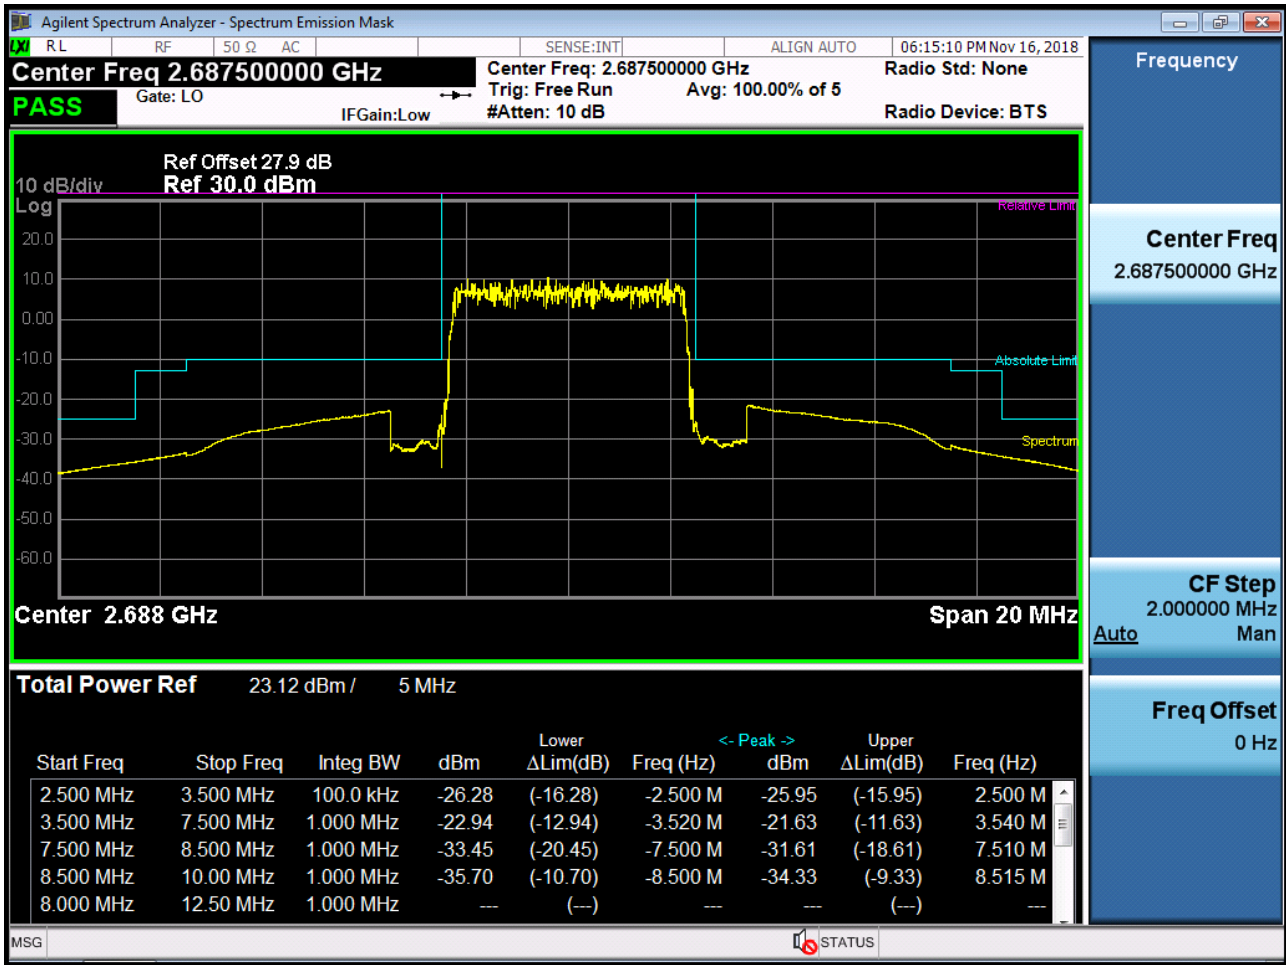


BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0)-1

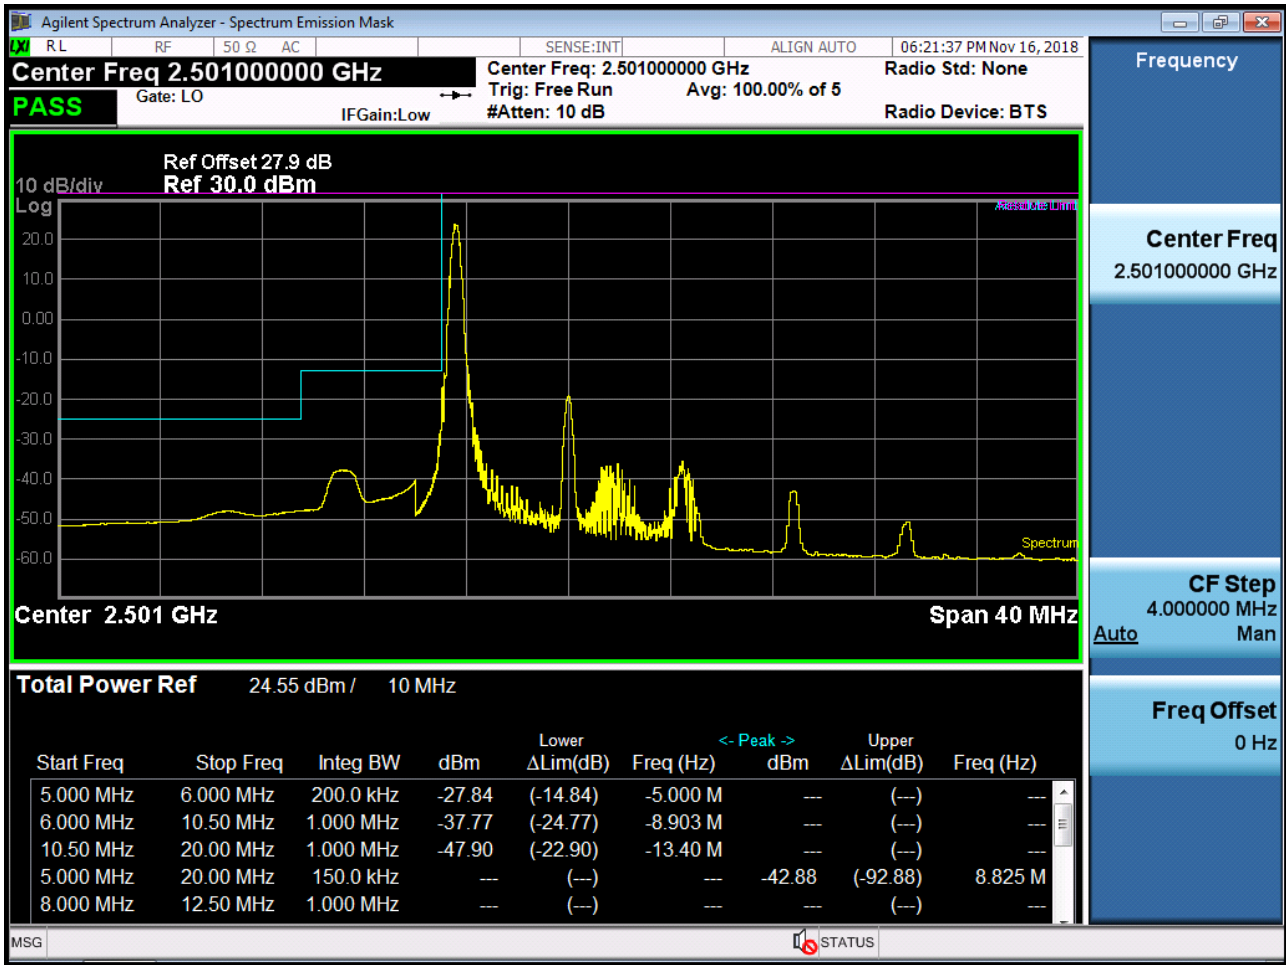

BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0)-2

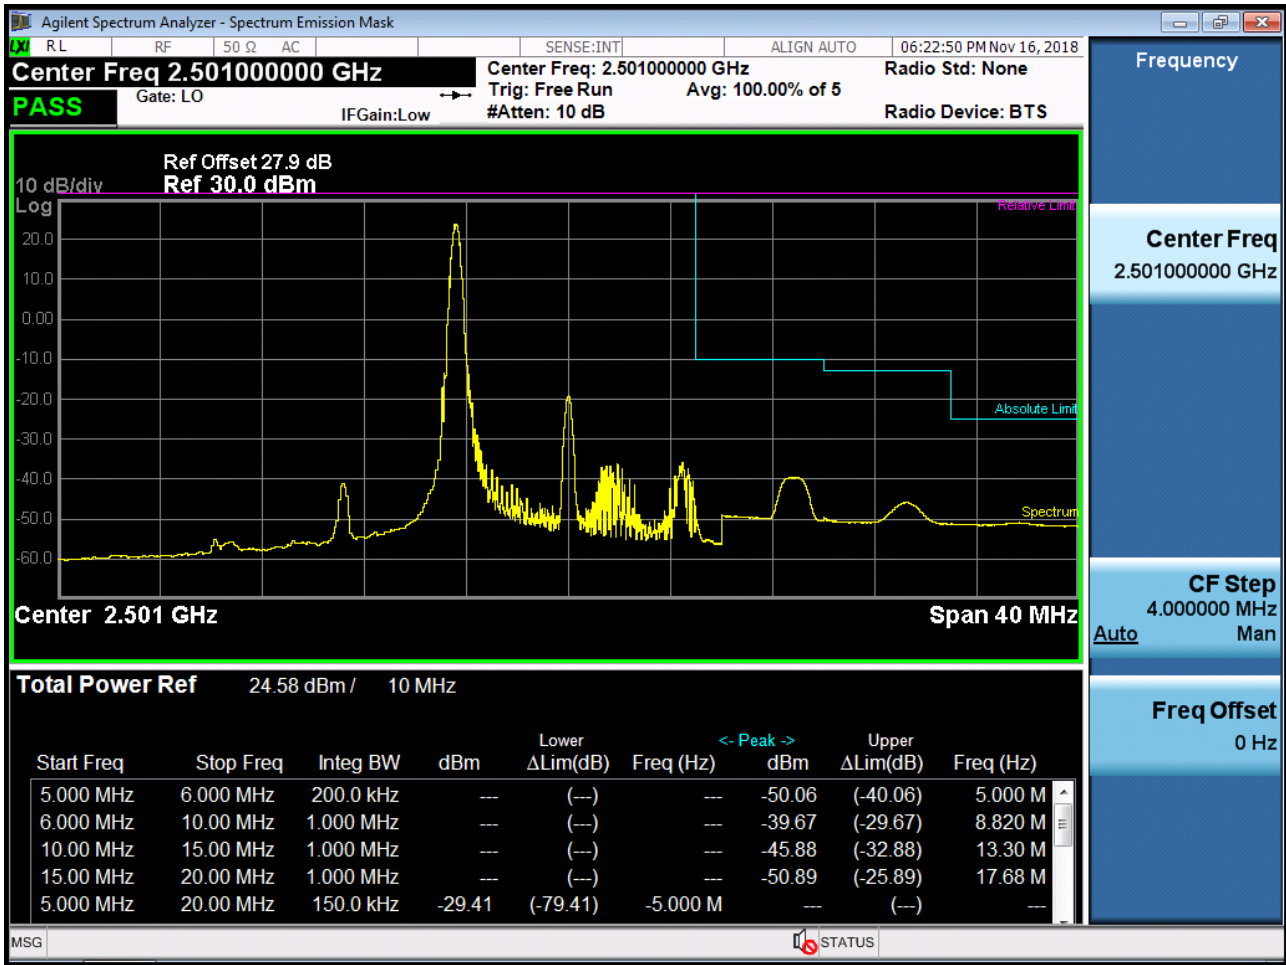


BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK\_RB50\_Offset 0)-1

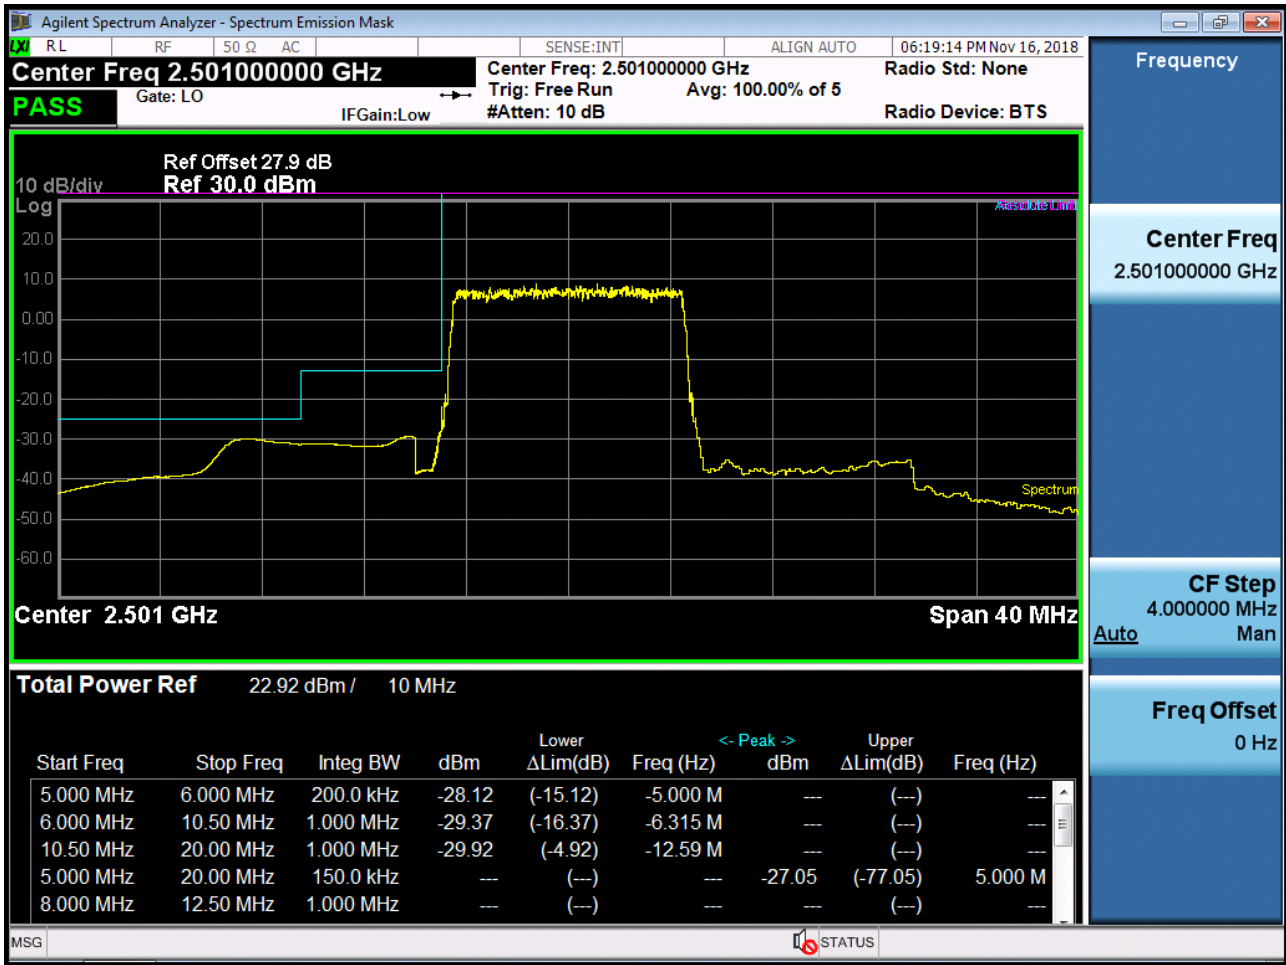





BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK\_RB50\_Offset 0)-2

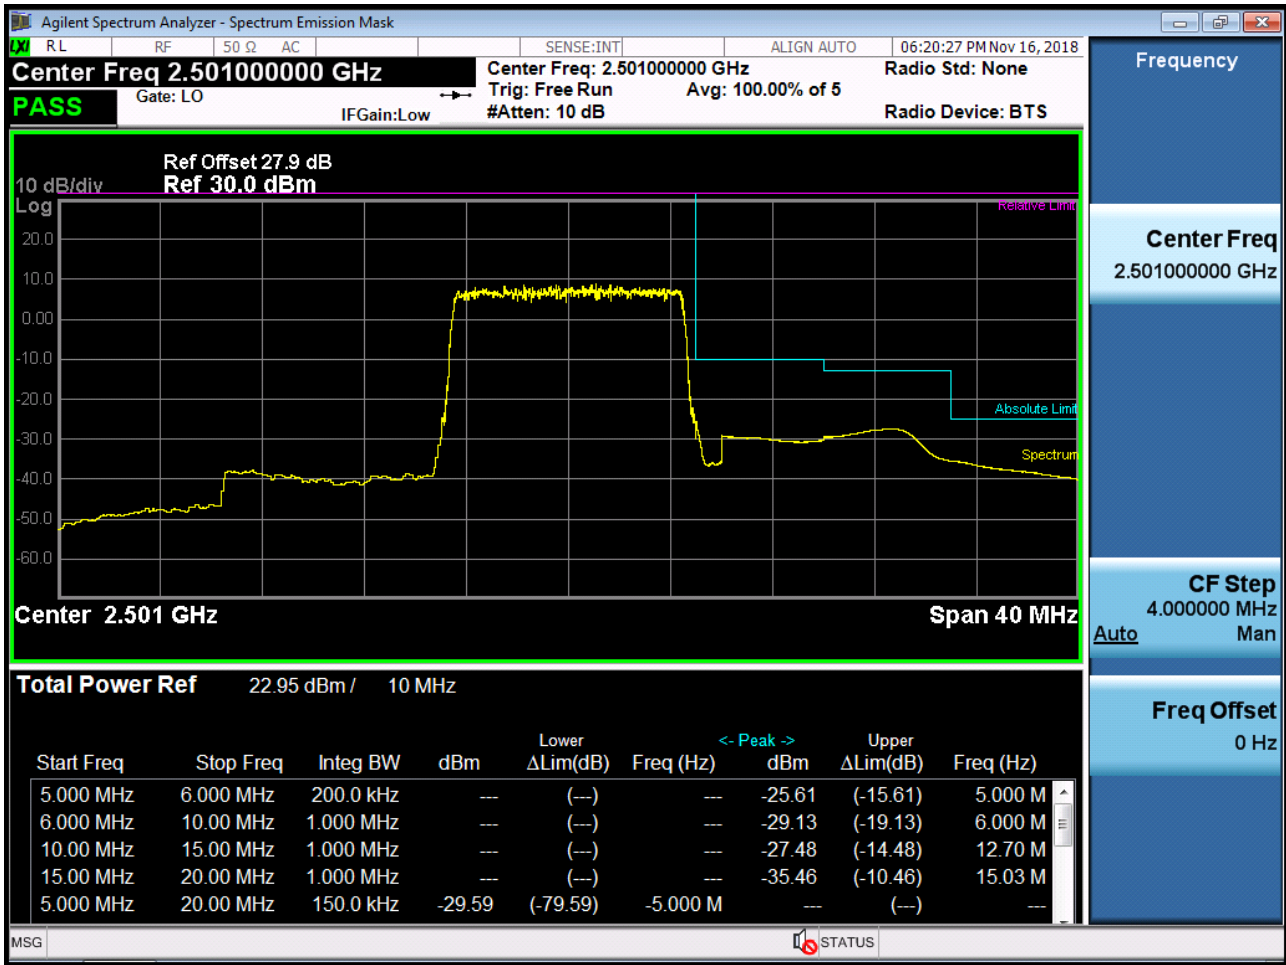


BAND 41. Mid Channel Edge Plot (10 MHz Ch.40620 QPSK RB 50)

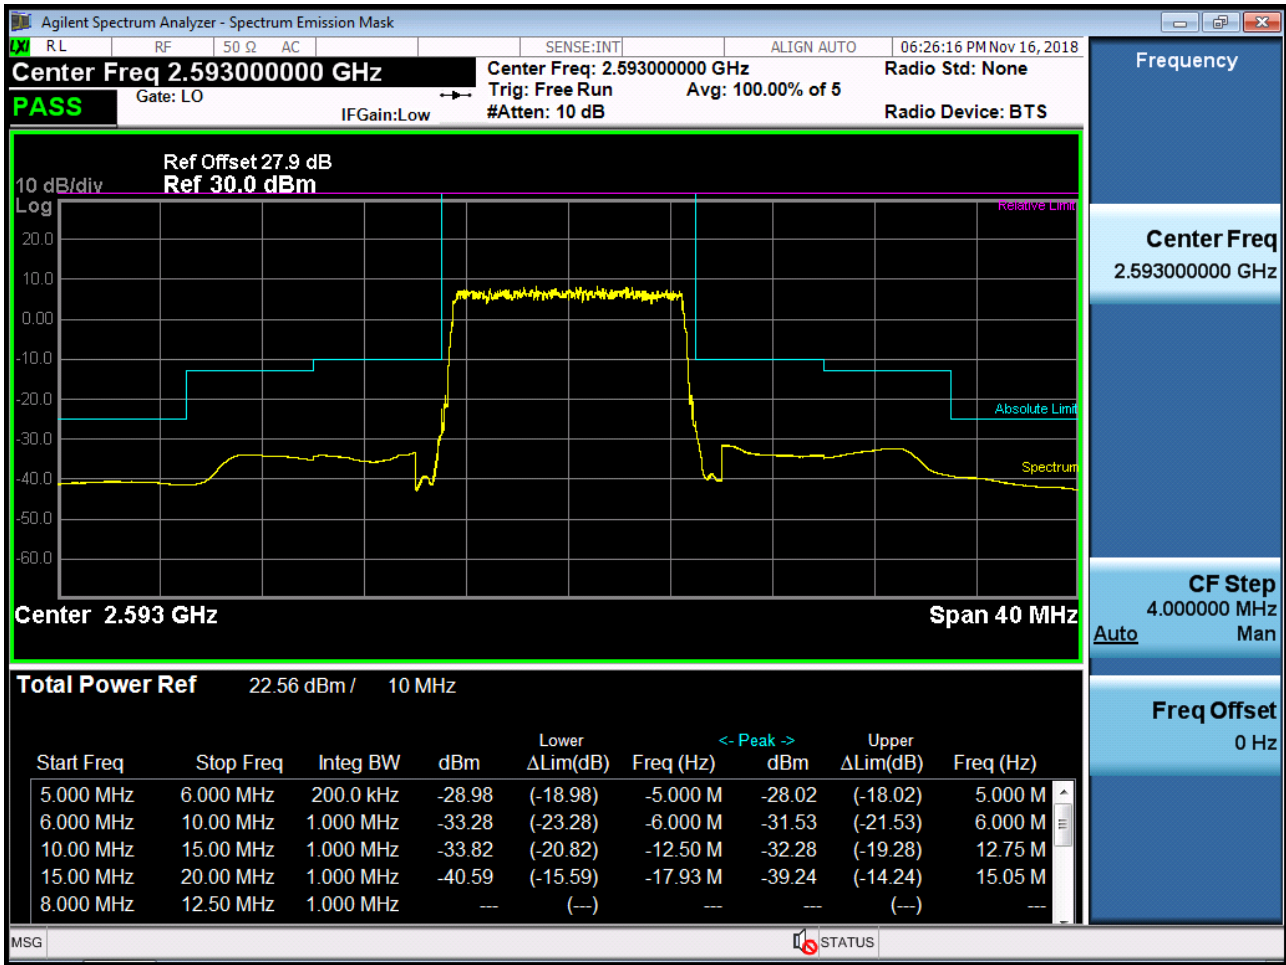


BAND 41. High Channel Edge Plot (10 MHz Ch.41540 QPSK RB 1, Offset 0)

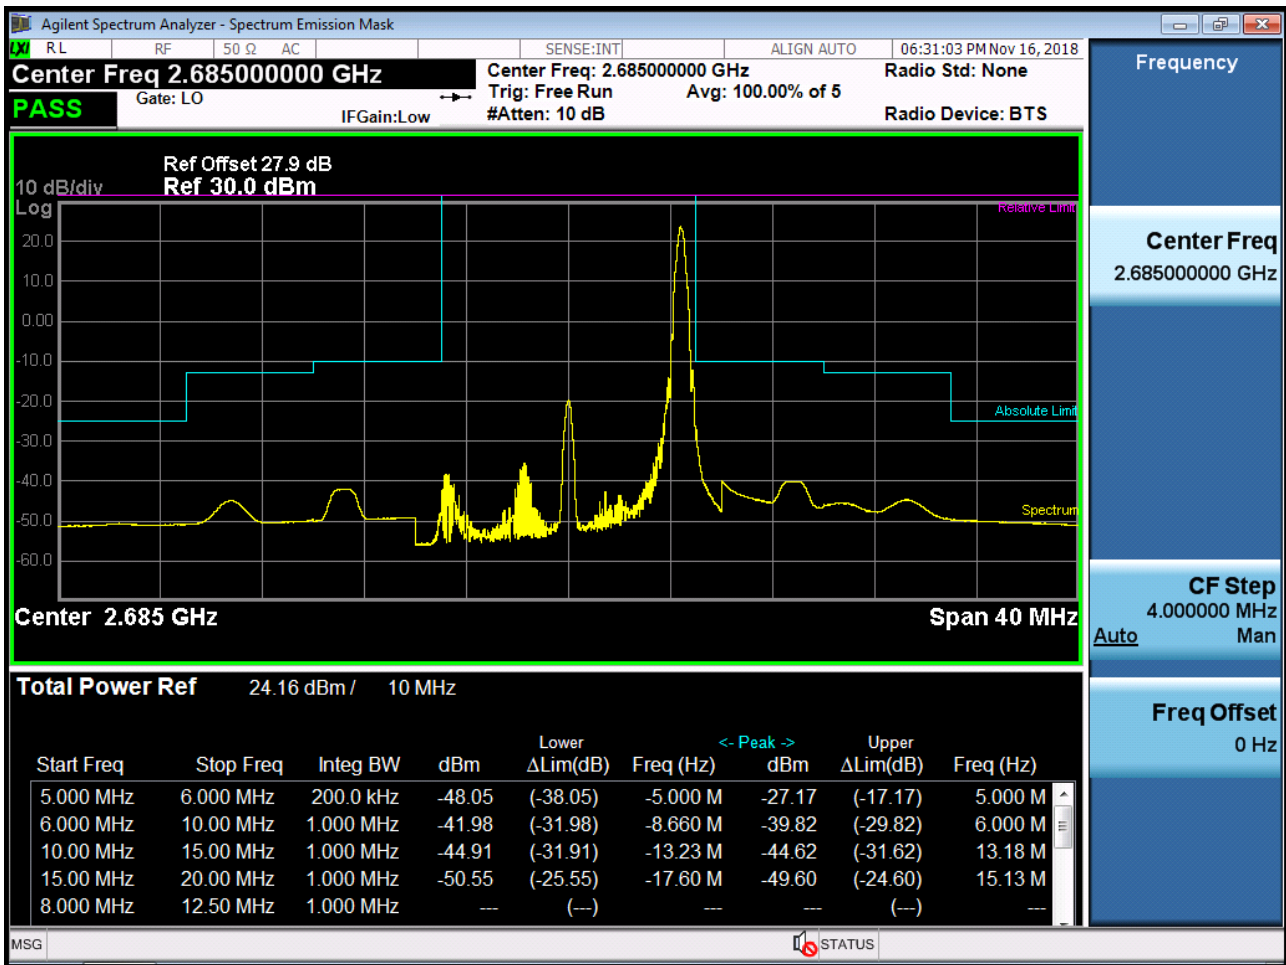


BAND 41. High Channel Edge Plot (10 MHz Ch.41540 QPSK\_RB50\_Offset 0)

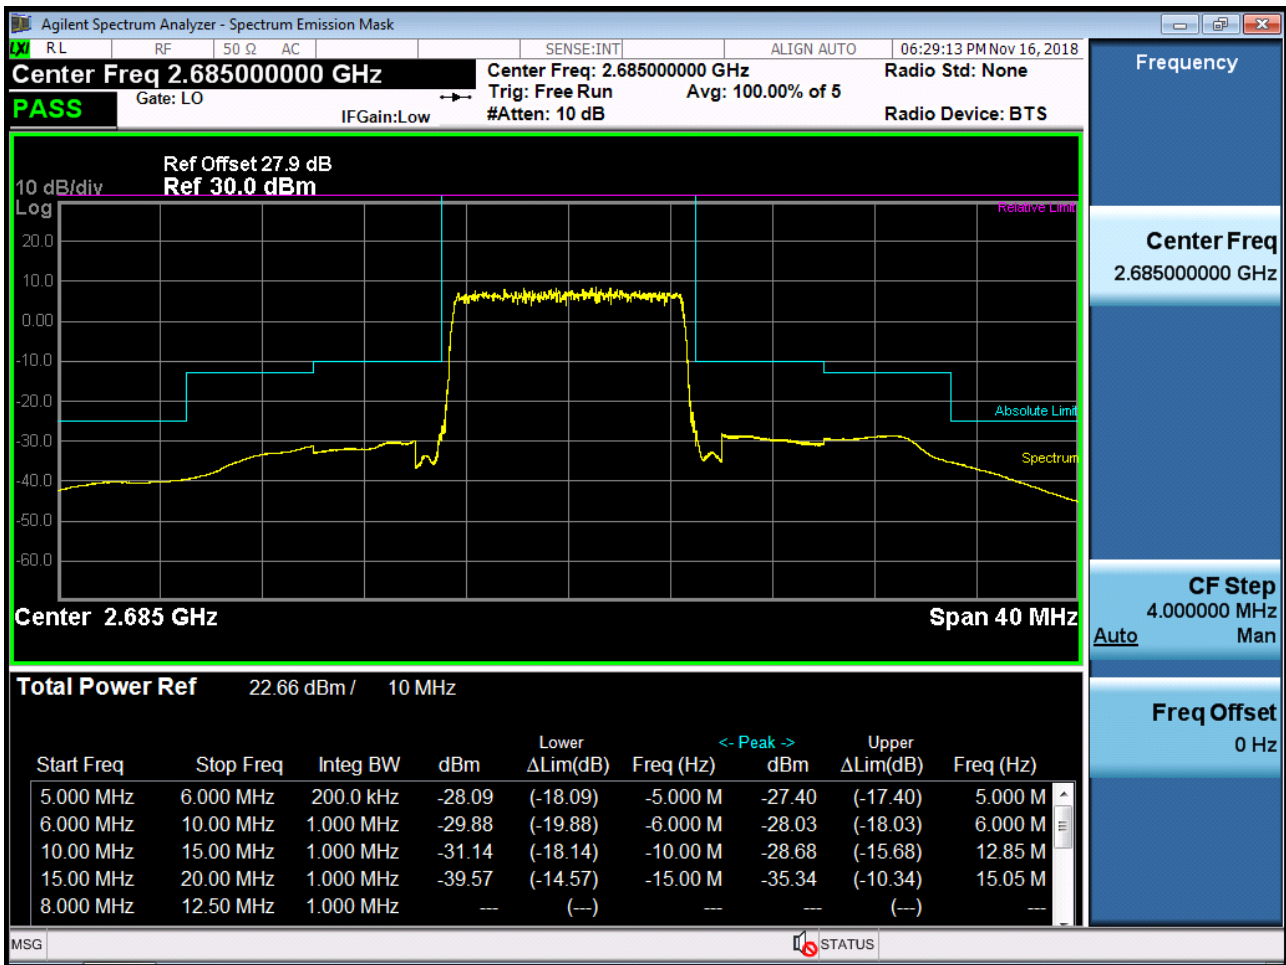


BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0)-1

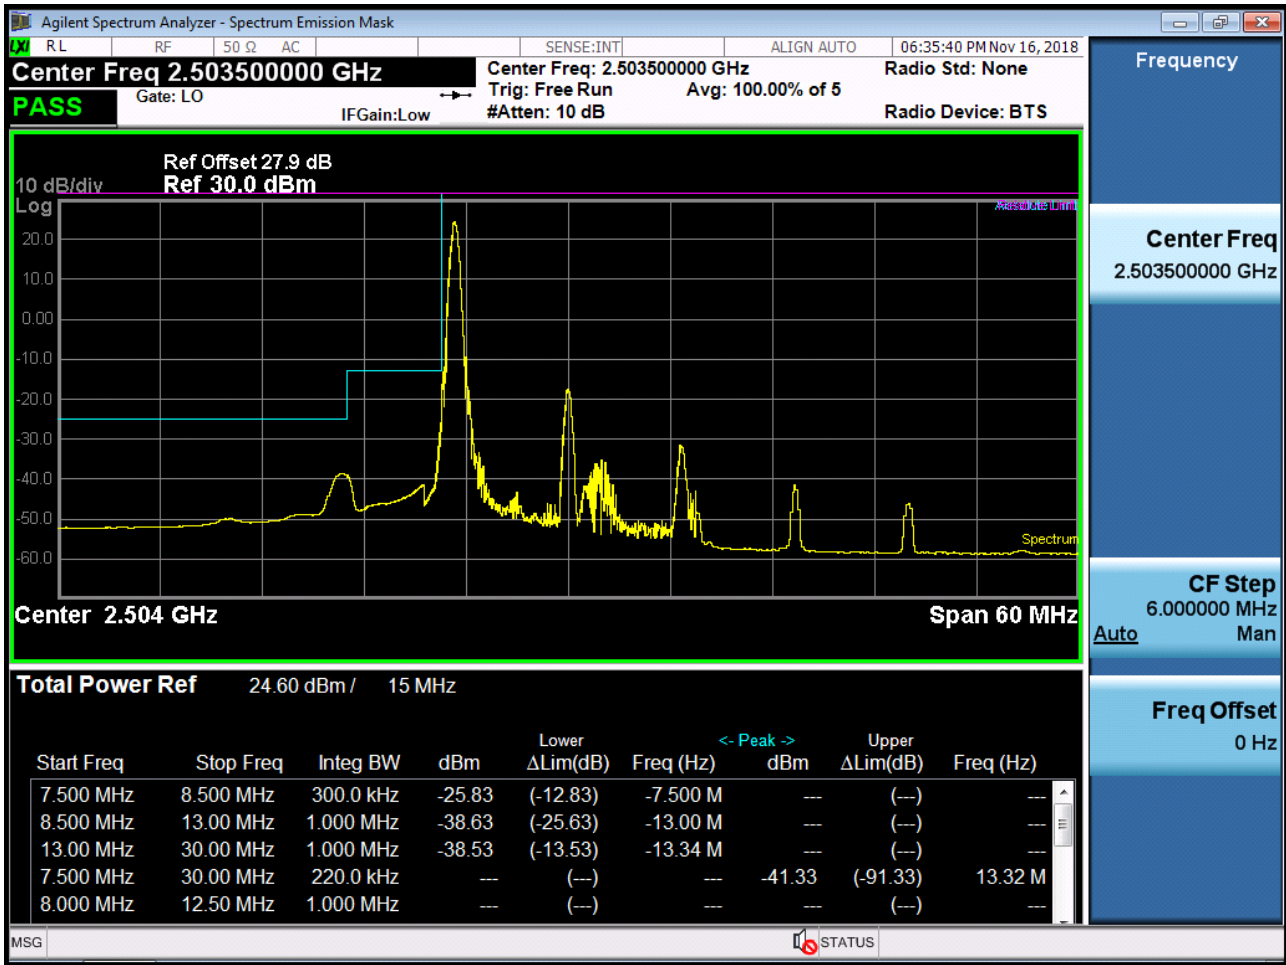


BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0)-2

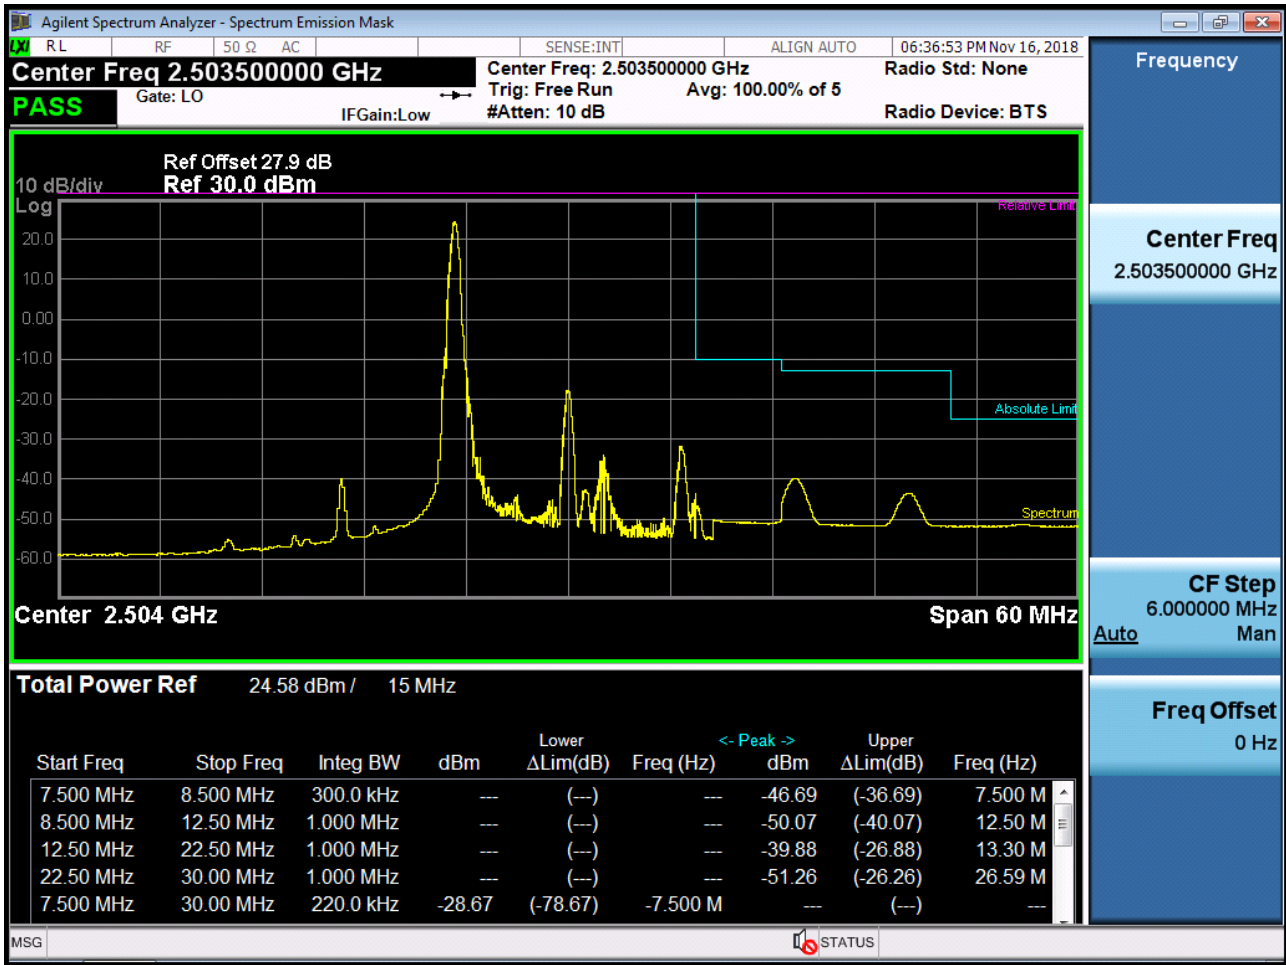

BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK\_RB75\_Offset 0)-1

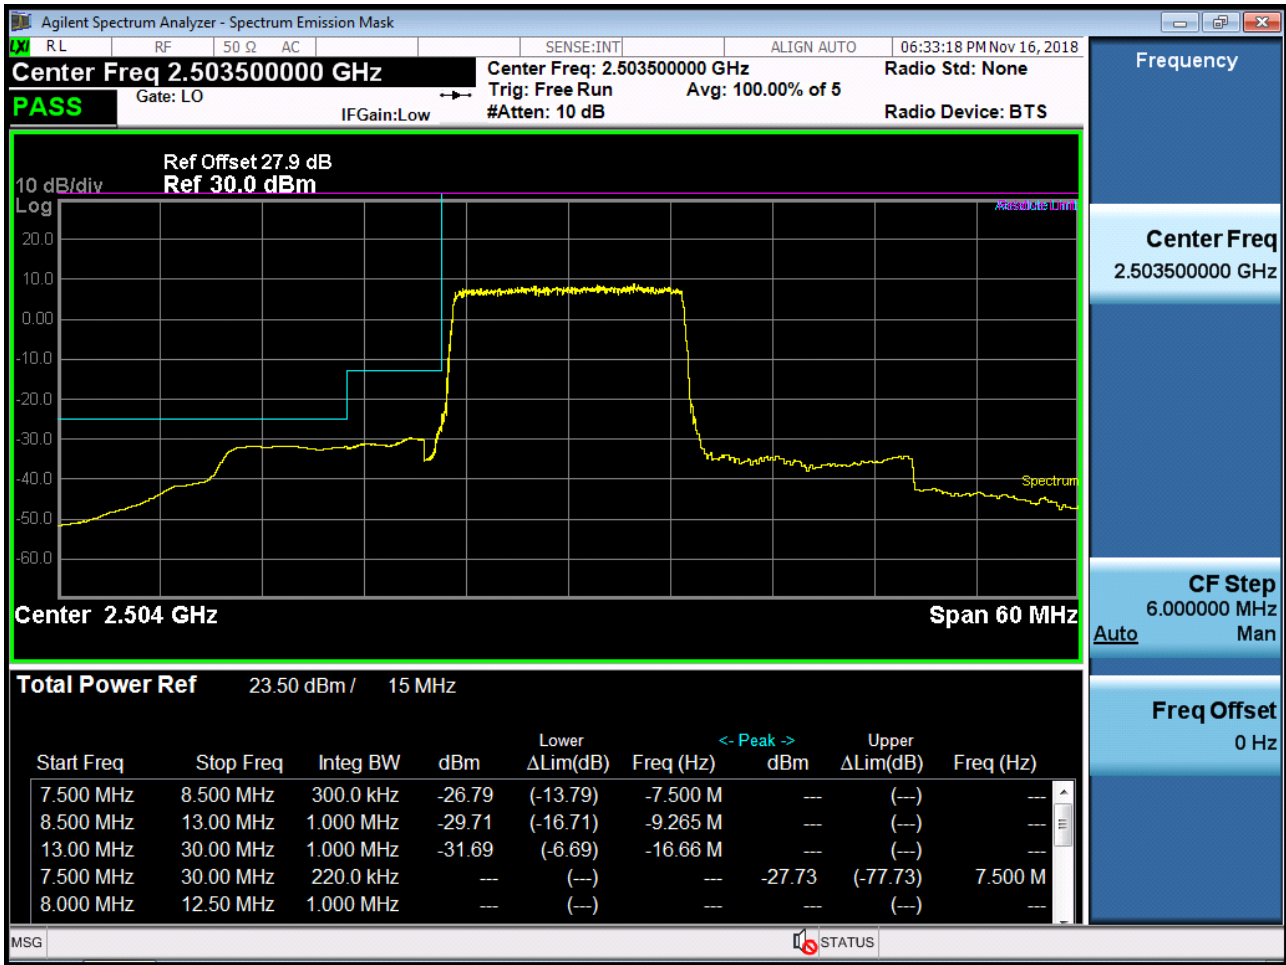


BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK\_RB75\_Offset 0)-2

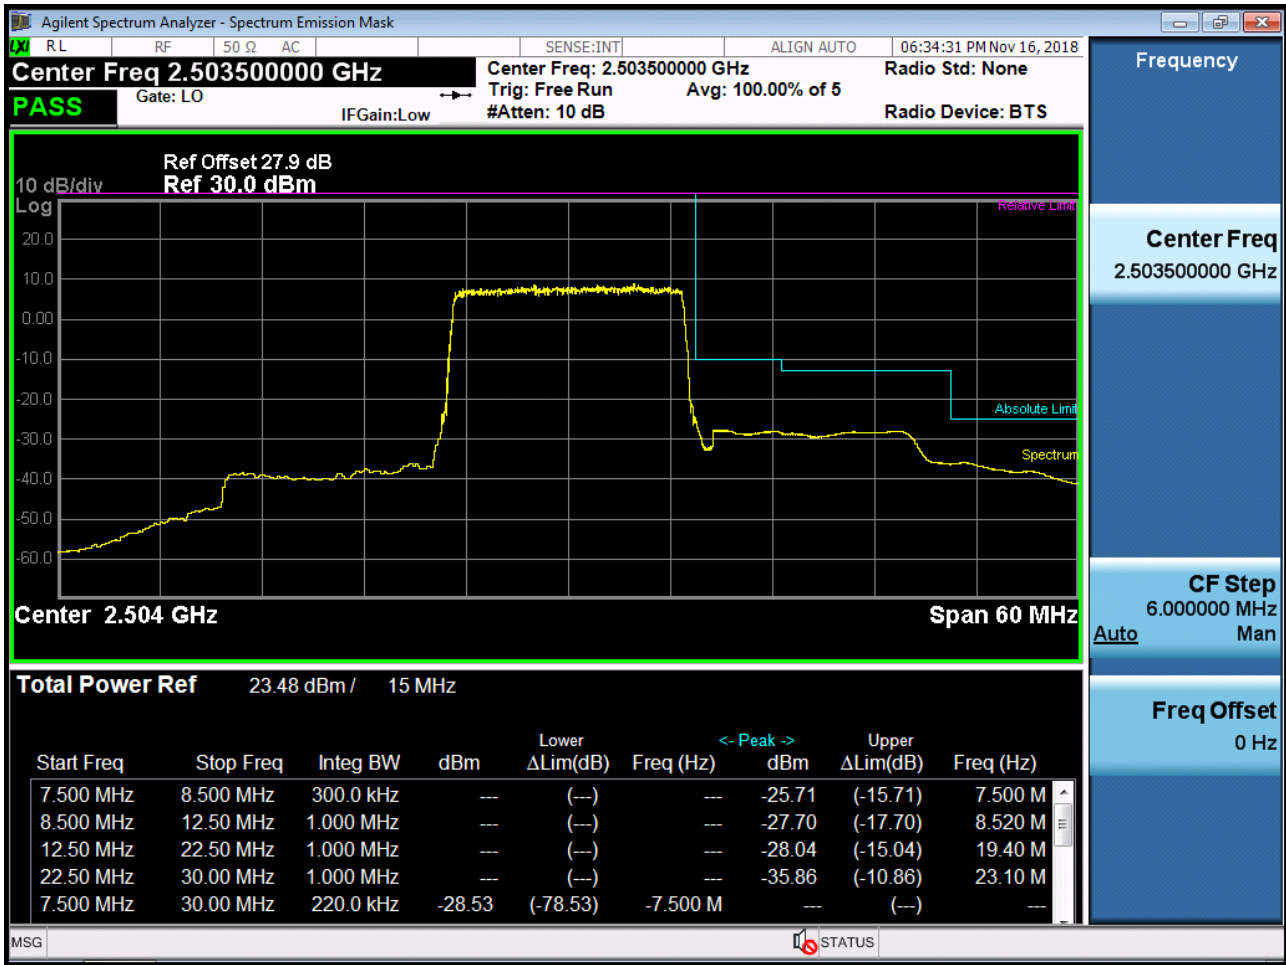





BAND 41. Mid Channel Edge Plot (15 MHz Ch.40620 QPSK RB 75)

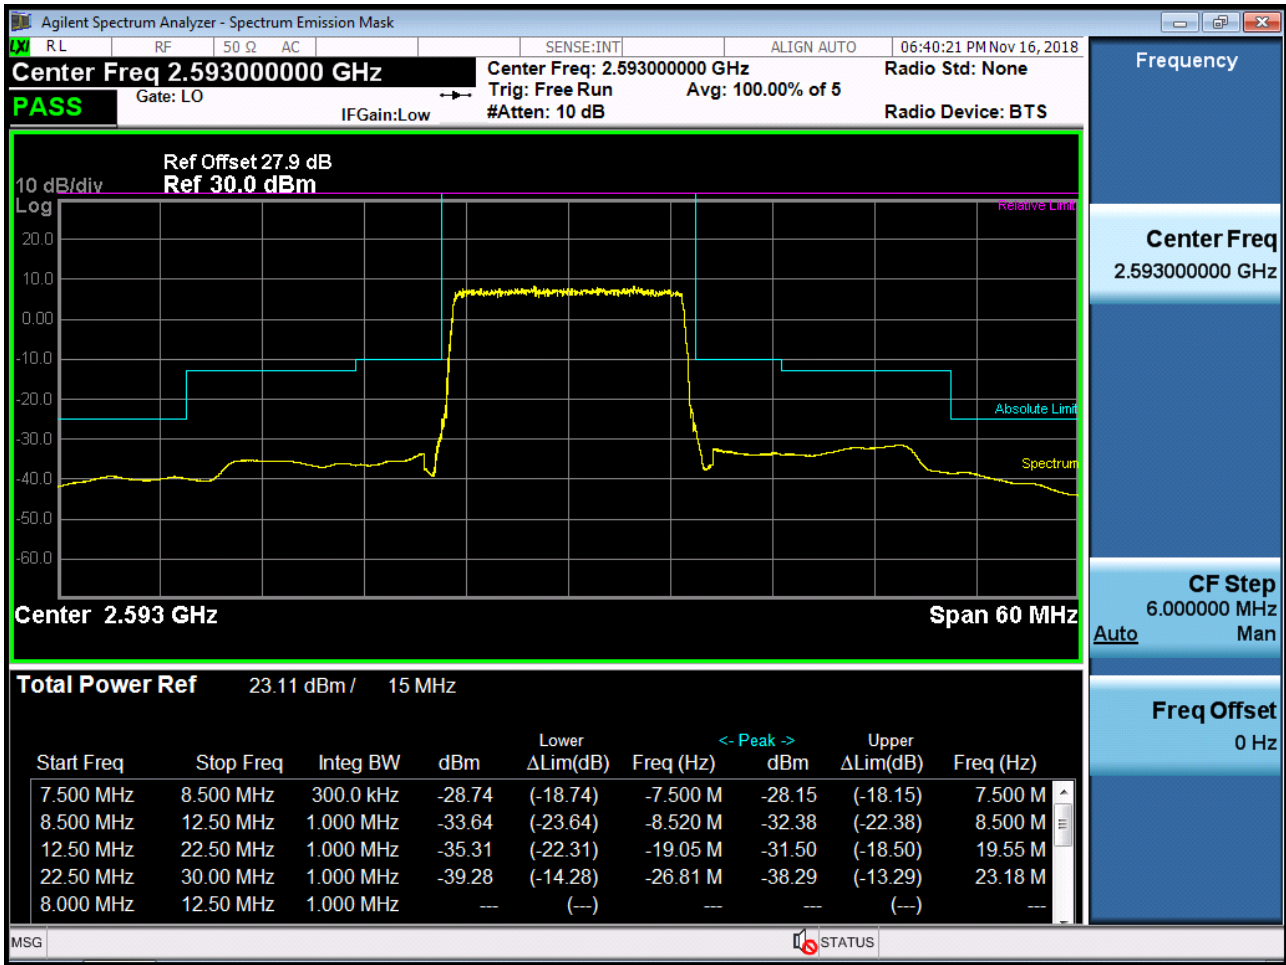


BAND 41. High Channel Edge Plot (15 MHz Ch.41515 QPSK RB 1, Offset 0)

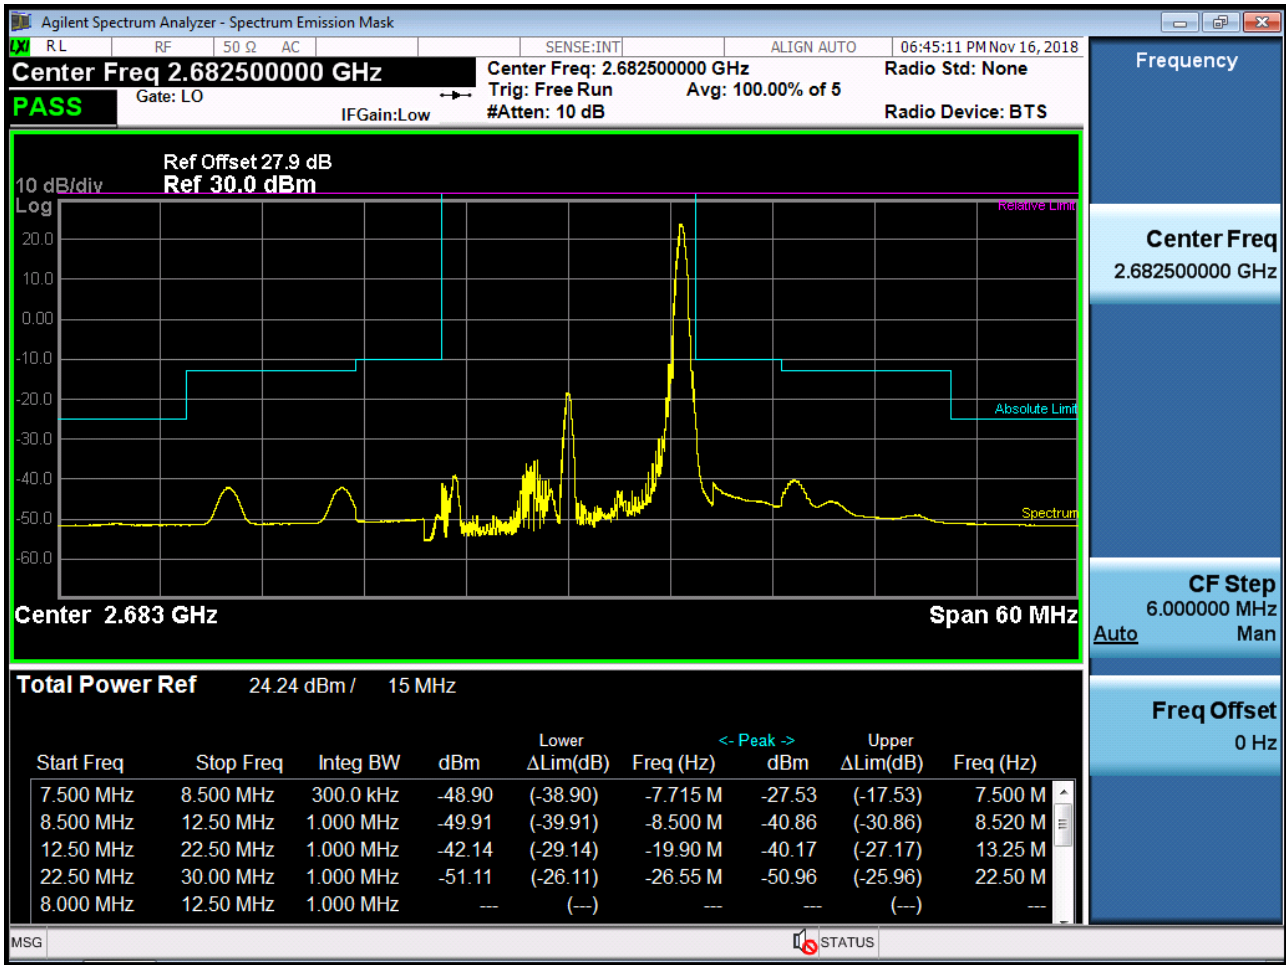


BAND 41. High Channel Edge Plot (15 MHz Ch.41515 QPSK\_RB75\_Offset 0)

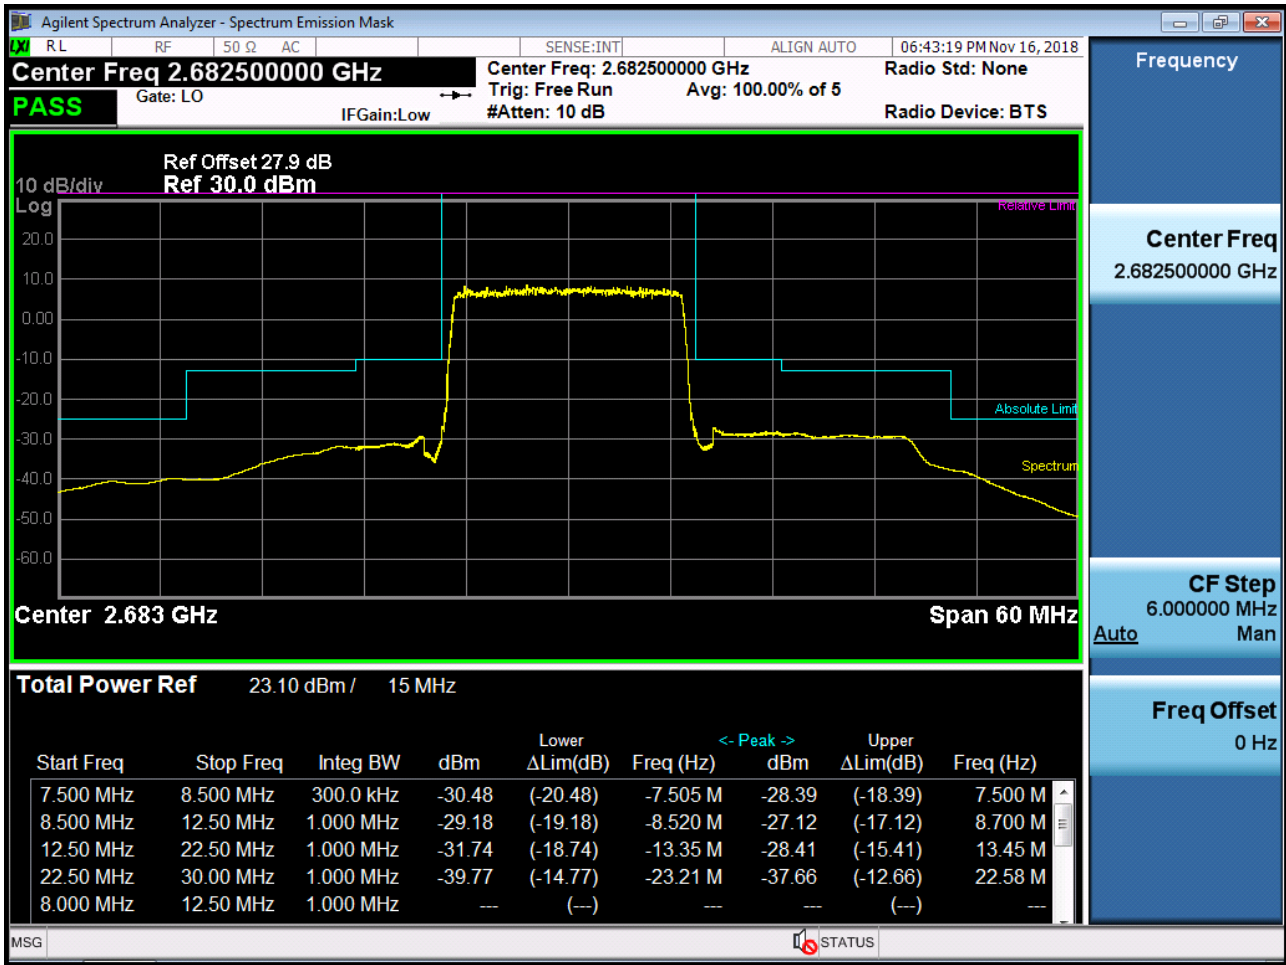


BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1, Offset 0)-1

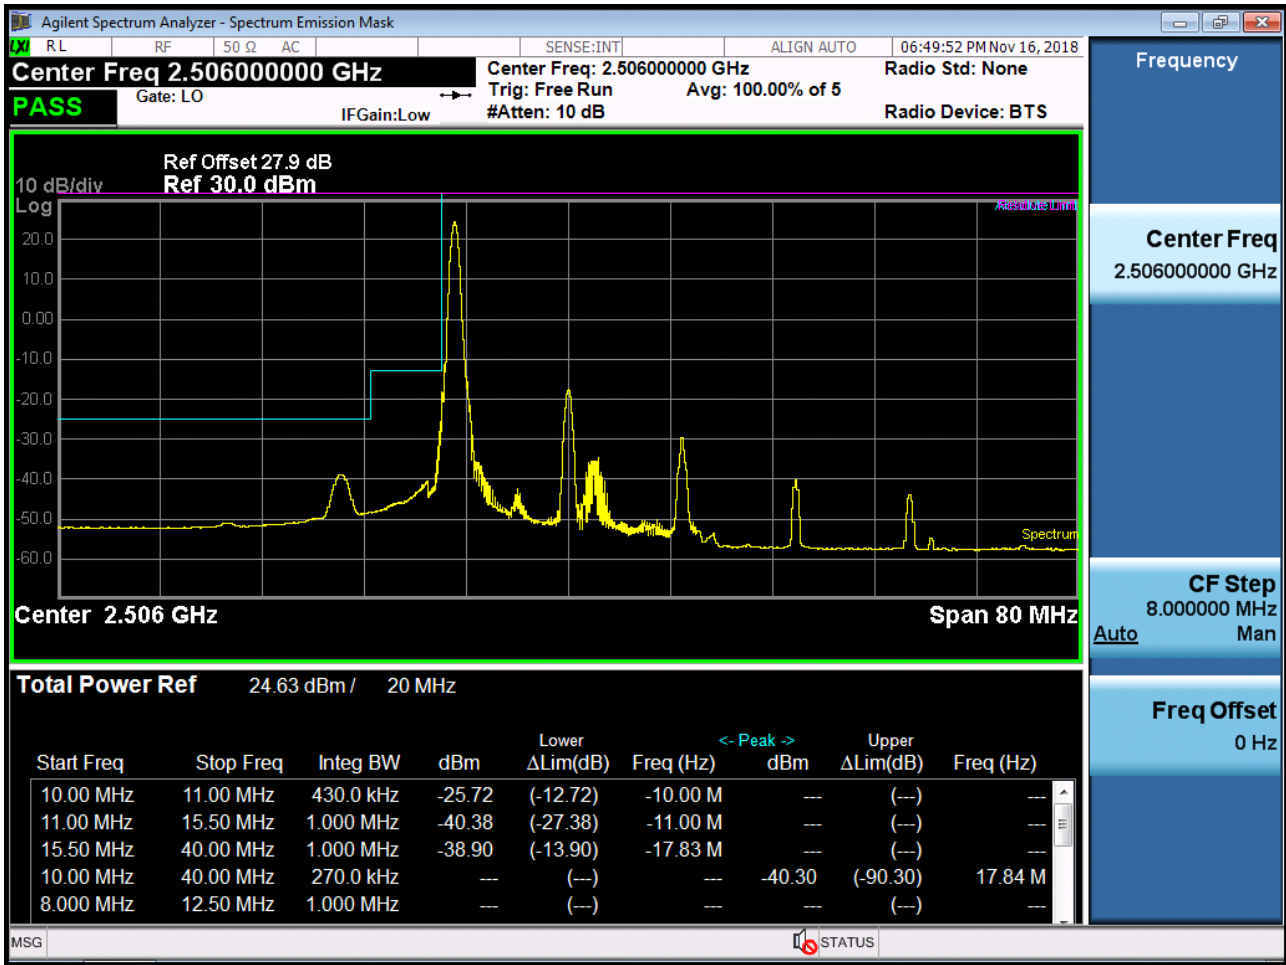


BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1, Offset 0)-2

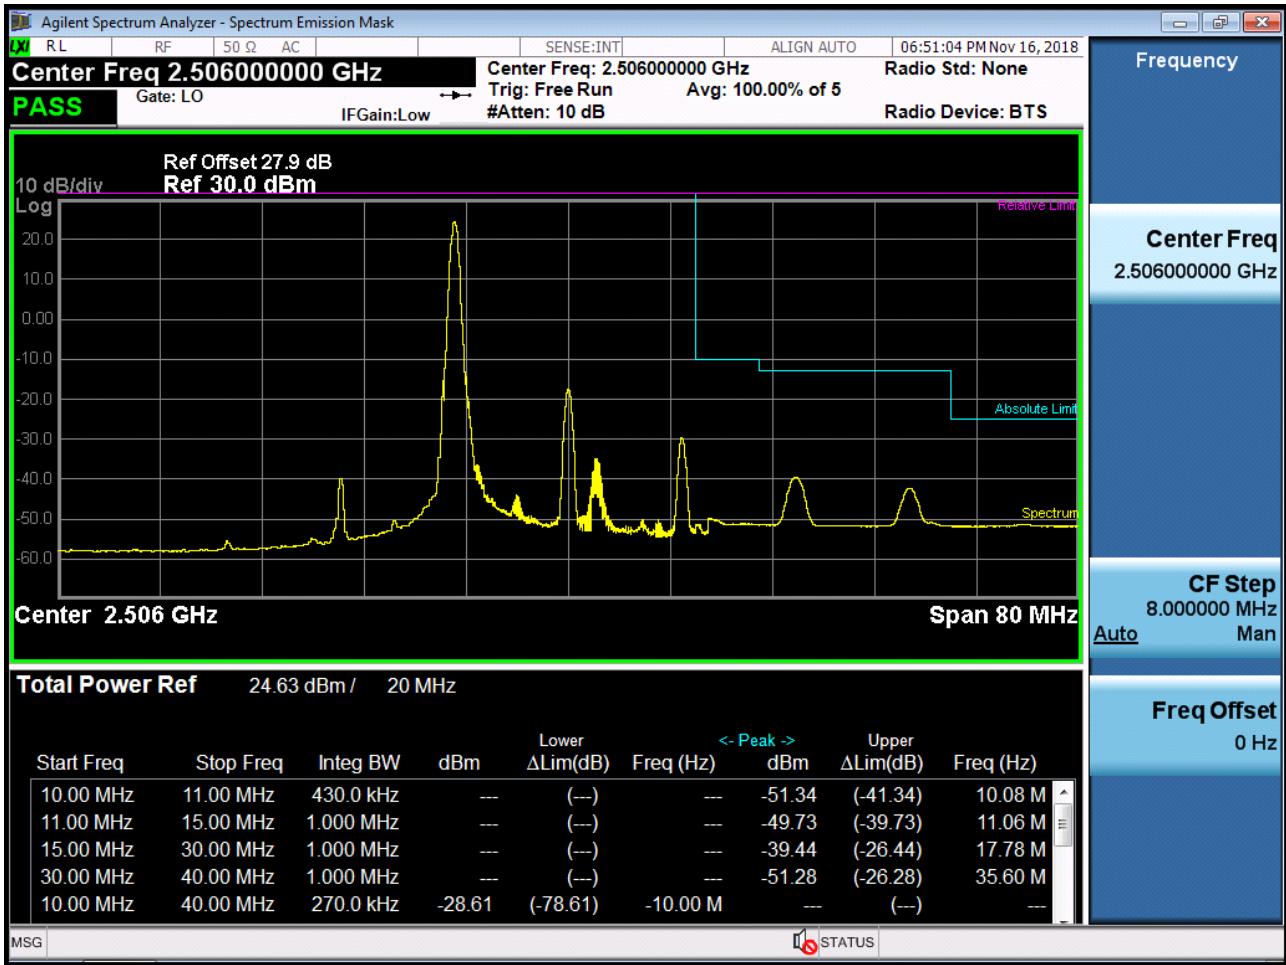


BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK\_RB100\_Offset 0)-1

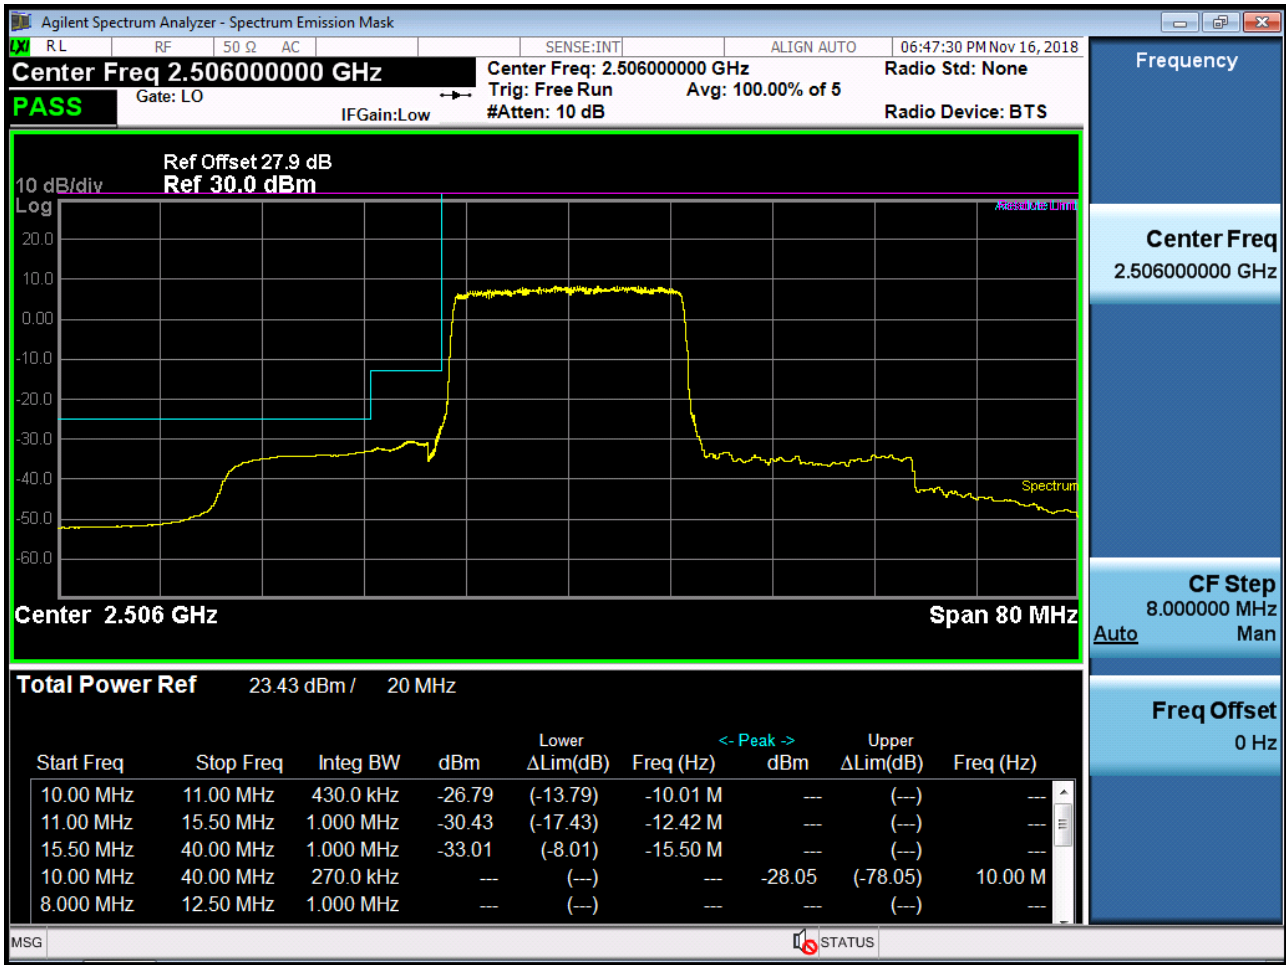

BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK\_RB100\_Offset 0)-2

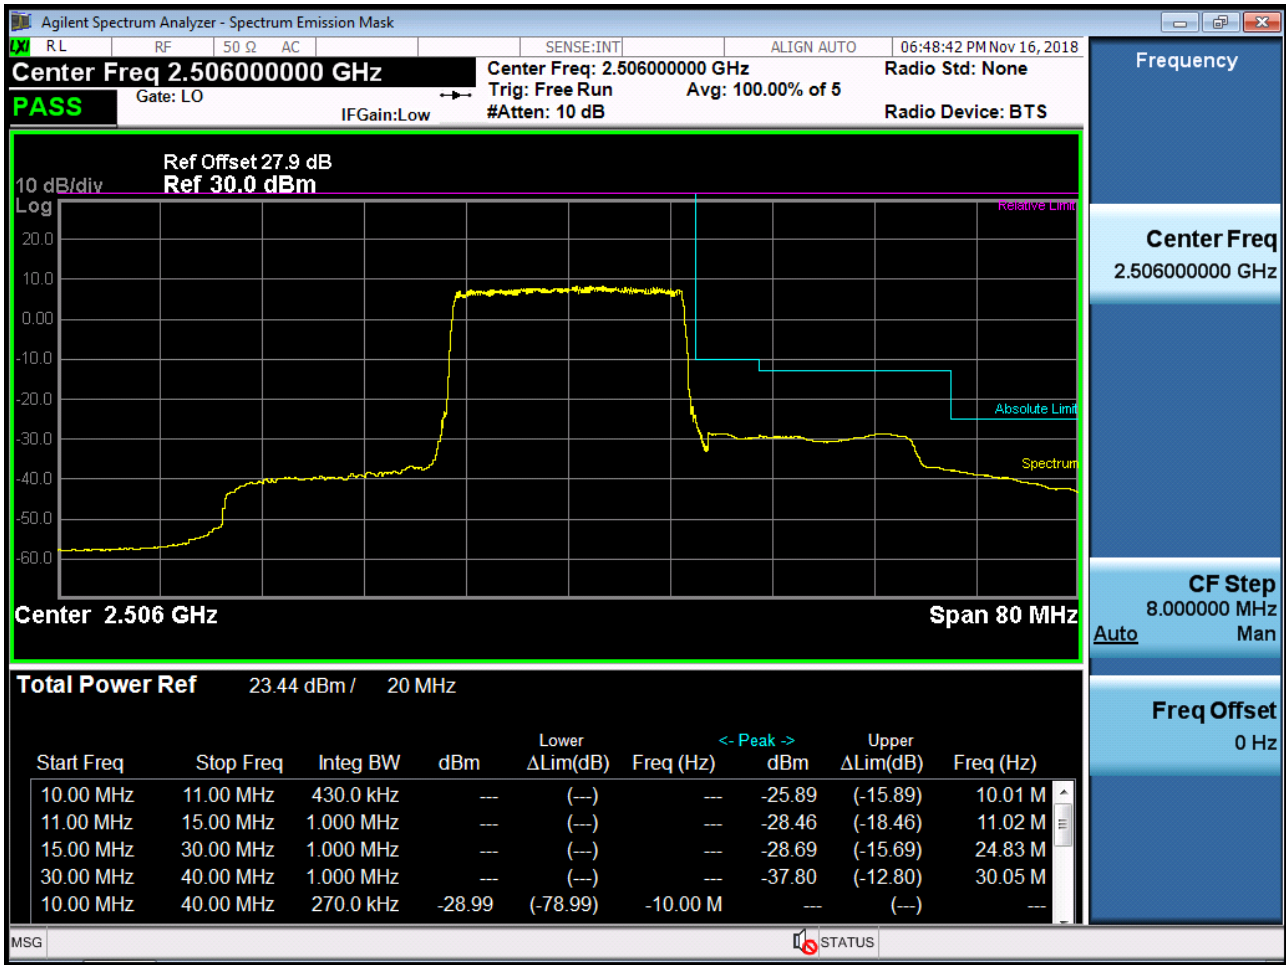


BAND 41. Mid Channel Edge Plot (20 MHz Ch.40620 QPSK RB 100)

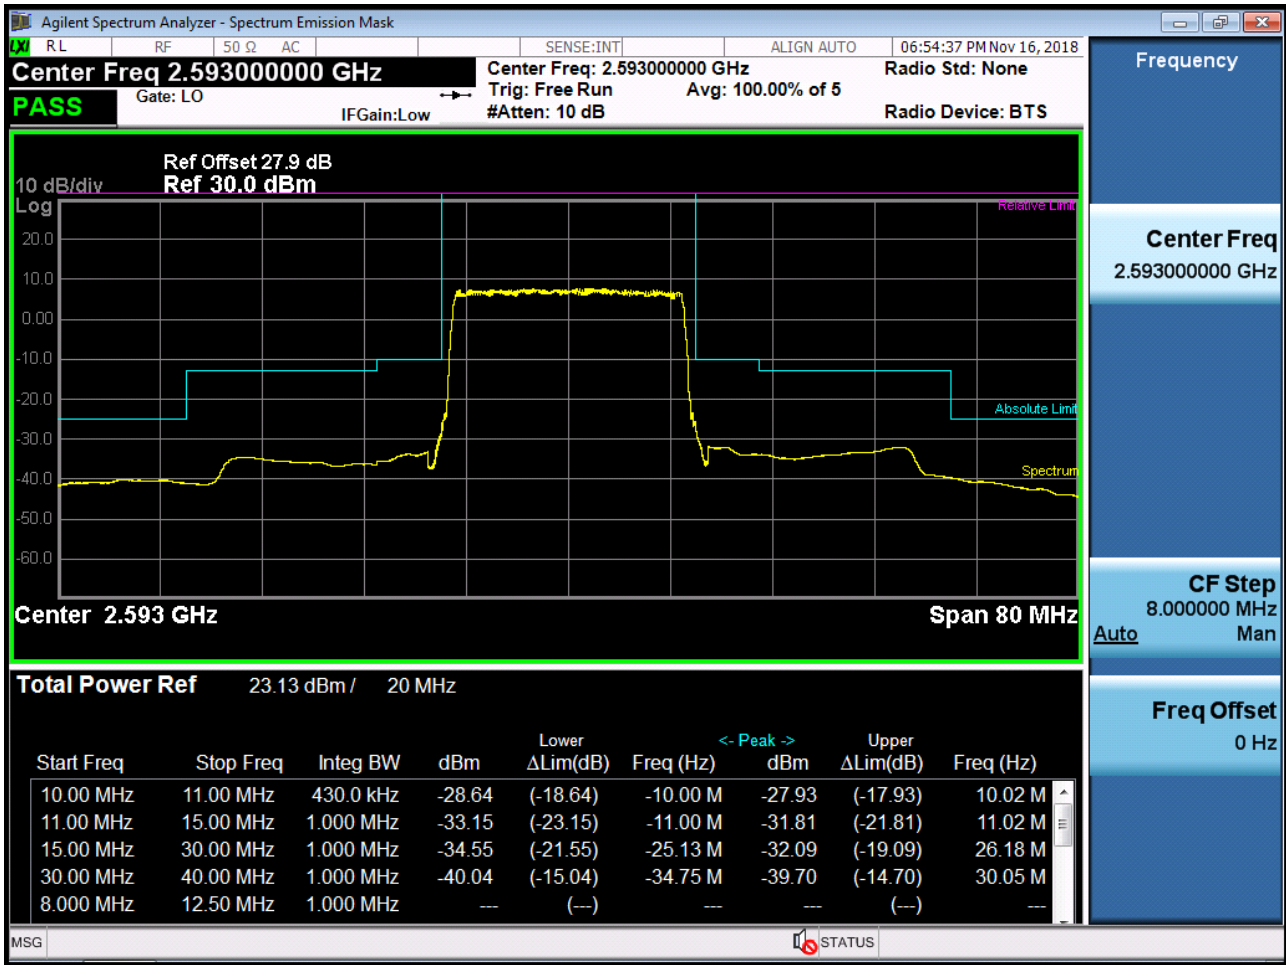




BAND 41. High Channel Edge Plot (20 MHz Ch.41490 QPSK RB 1, Offset 0)

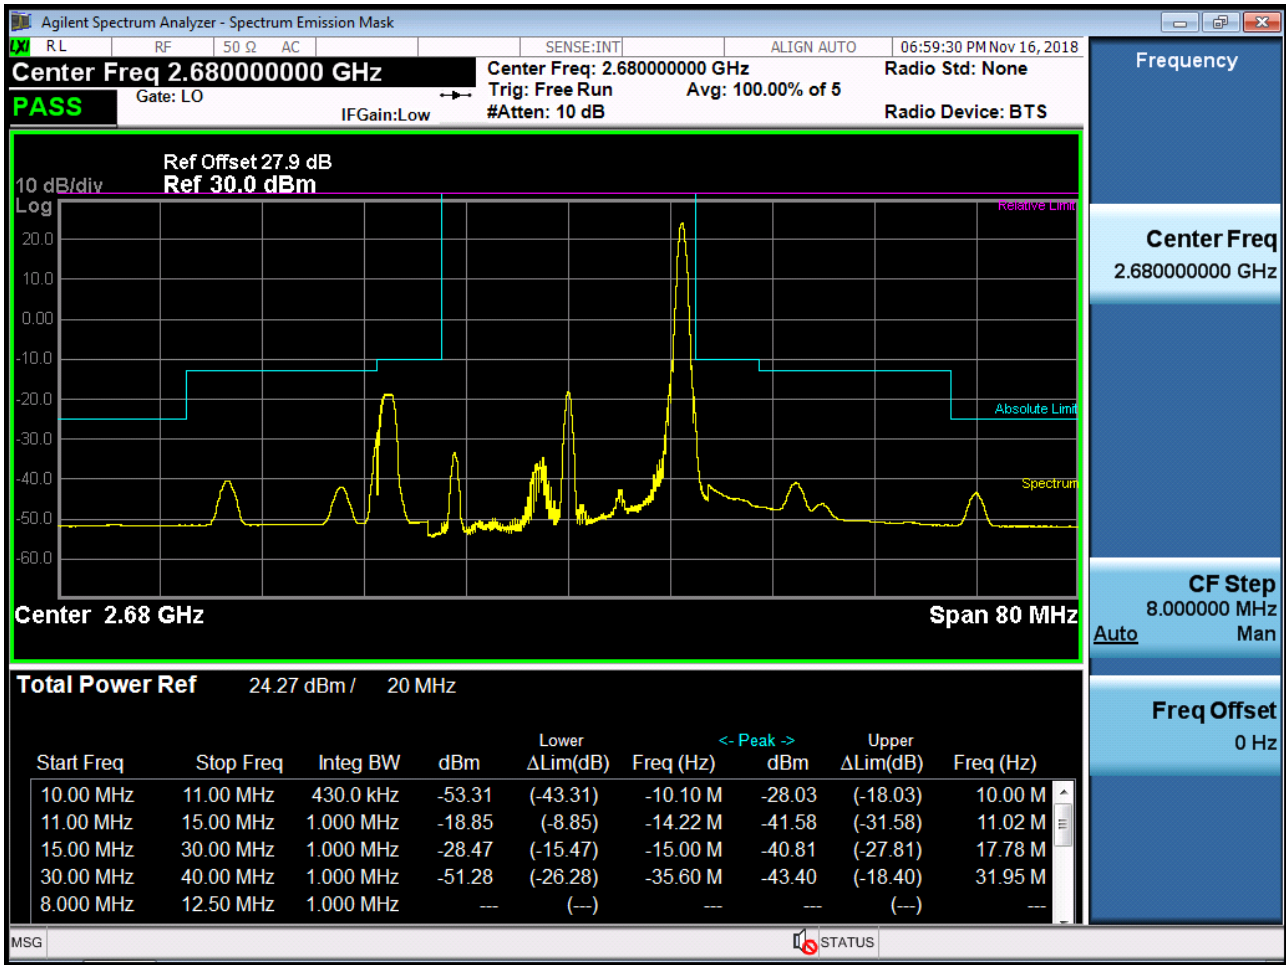

BAND 41. High Channel Edge Plot (20 MHz Ch.41490 QPSK\_RB100\_Offset 0)

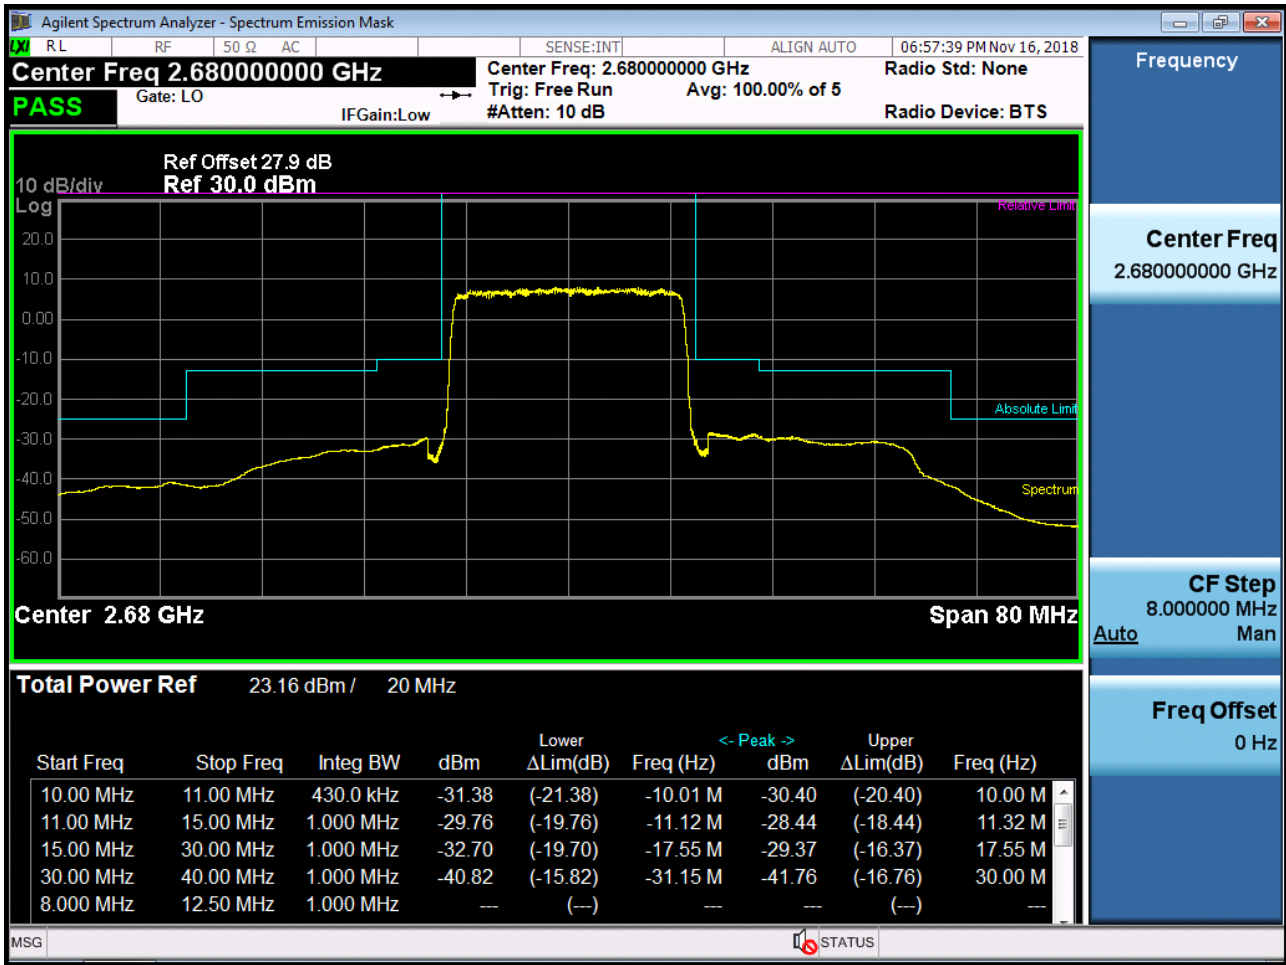





BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 39675 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.40620 QPSK RB 1, Offset 0)

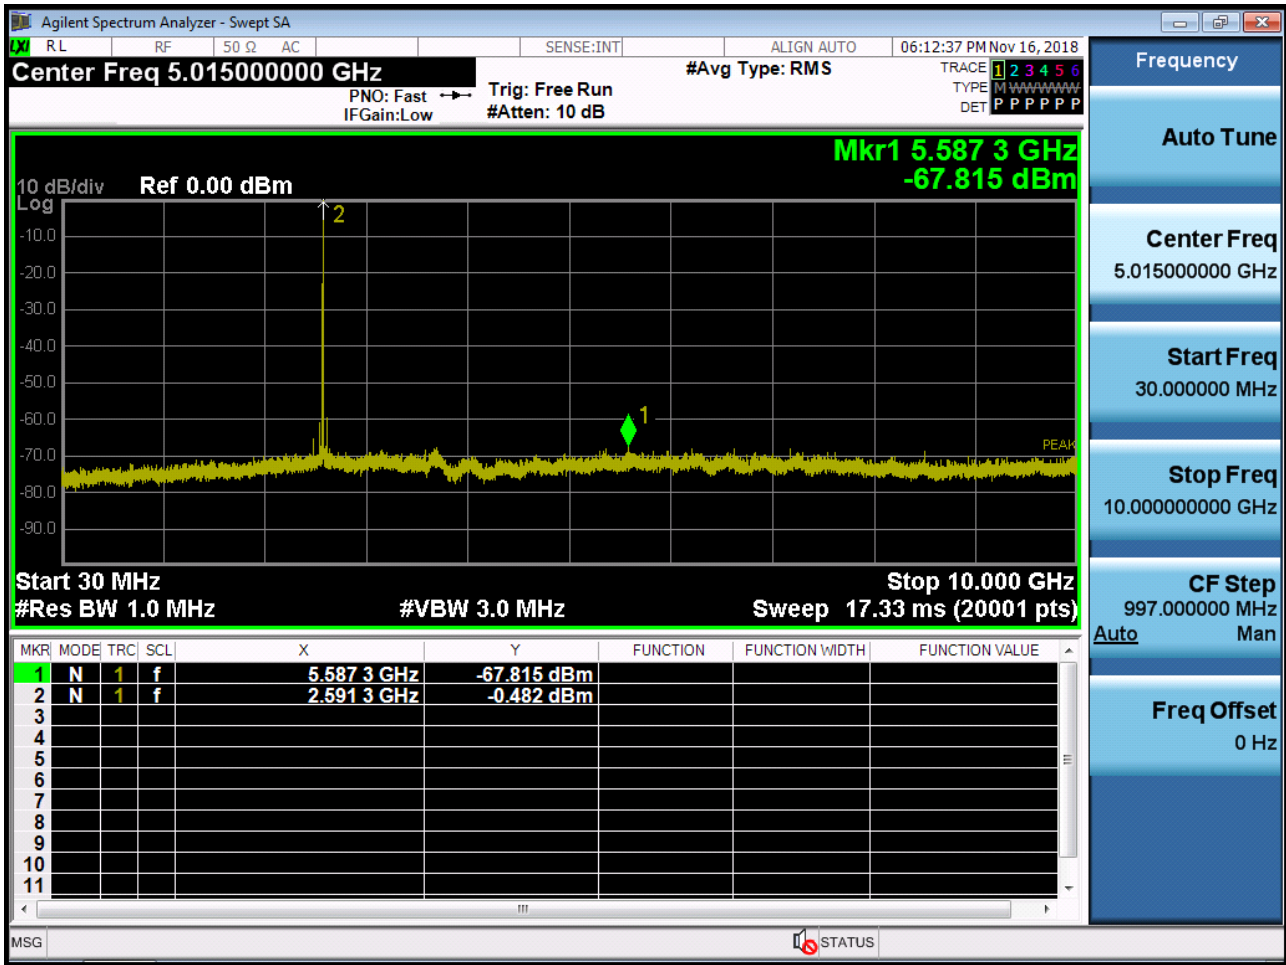


BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 40620 QPSK RB 1, Offset 0)

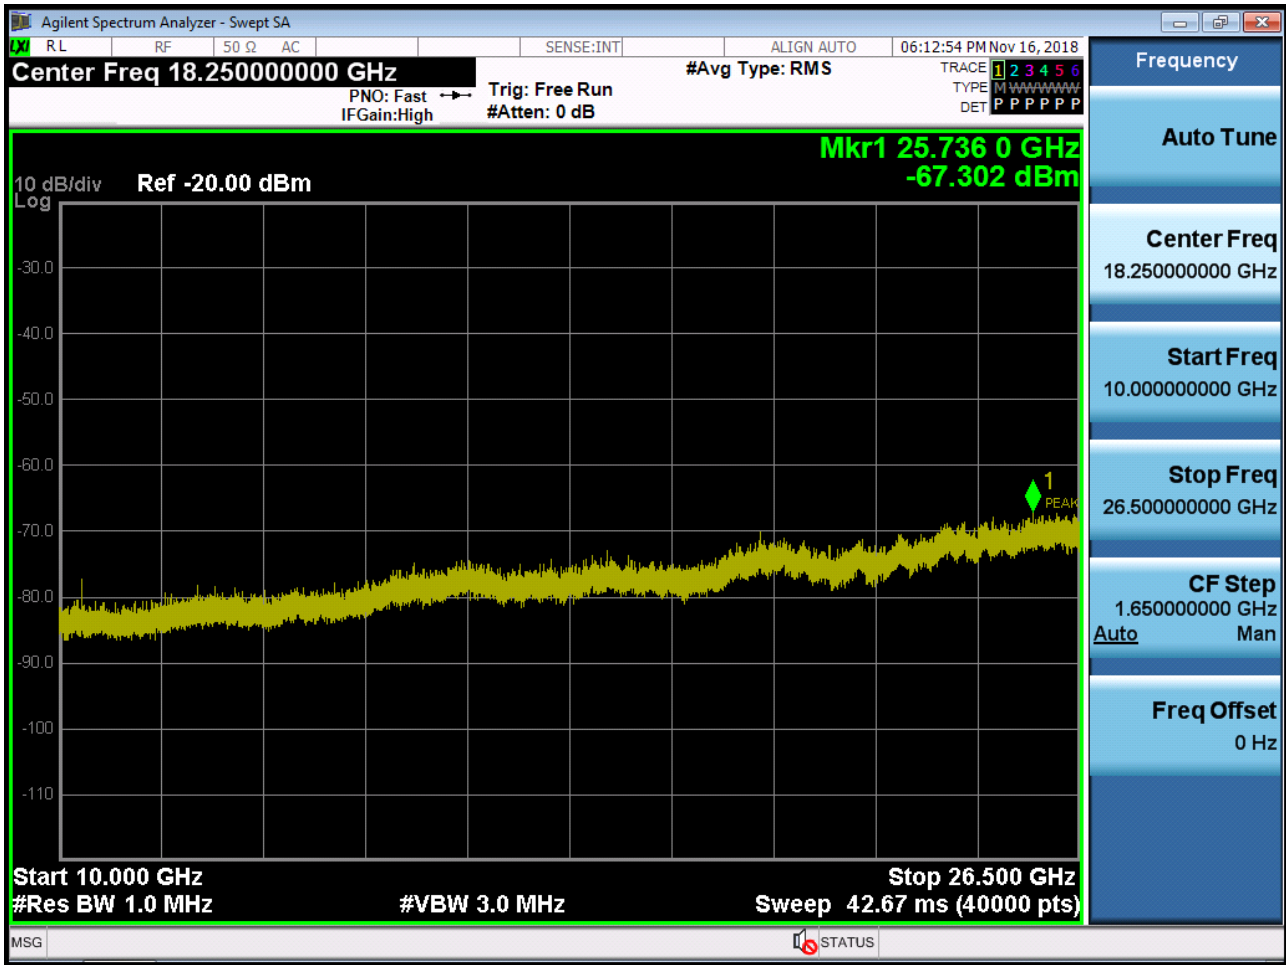




BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 41565 QPSK RB 1, Offset 0)

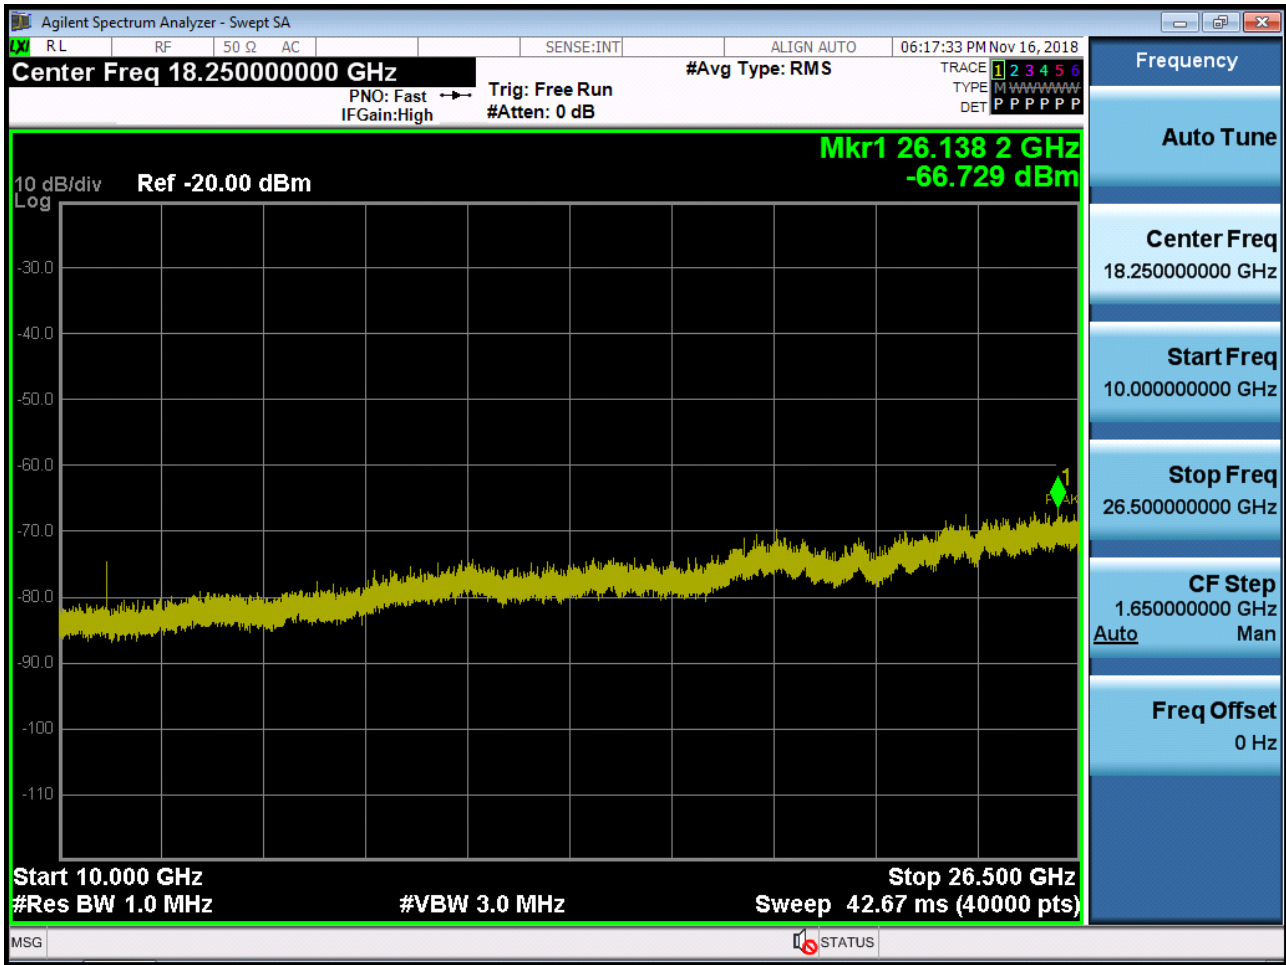





BAND 41. Conducted Spurious Plot 3 (5 MHz Ch. 41565 QPSK RB 1, Offset 0)

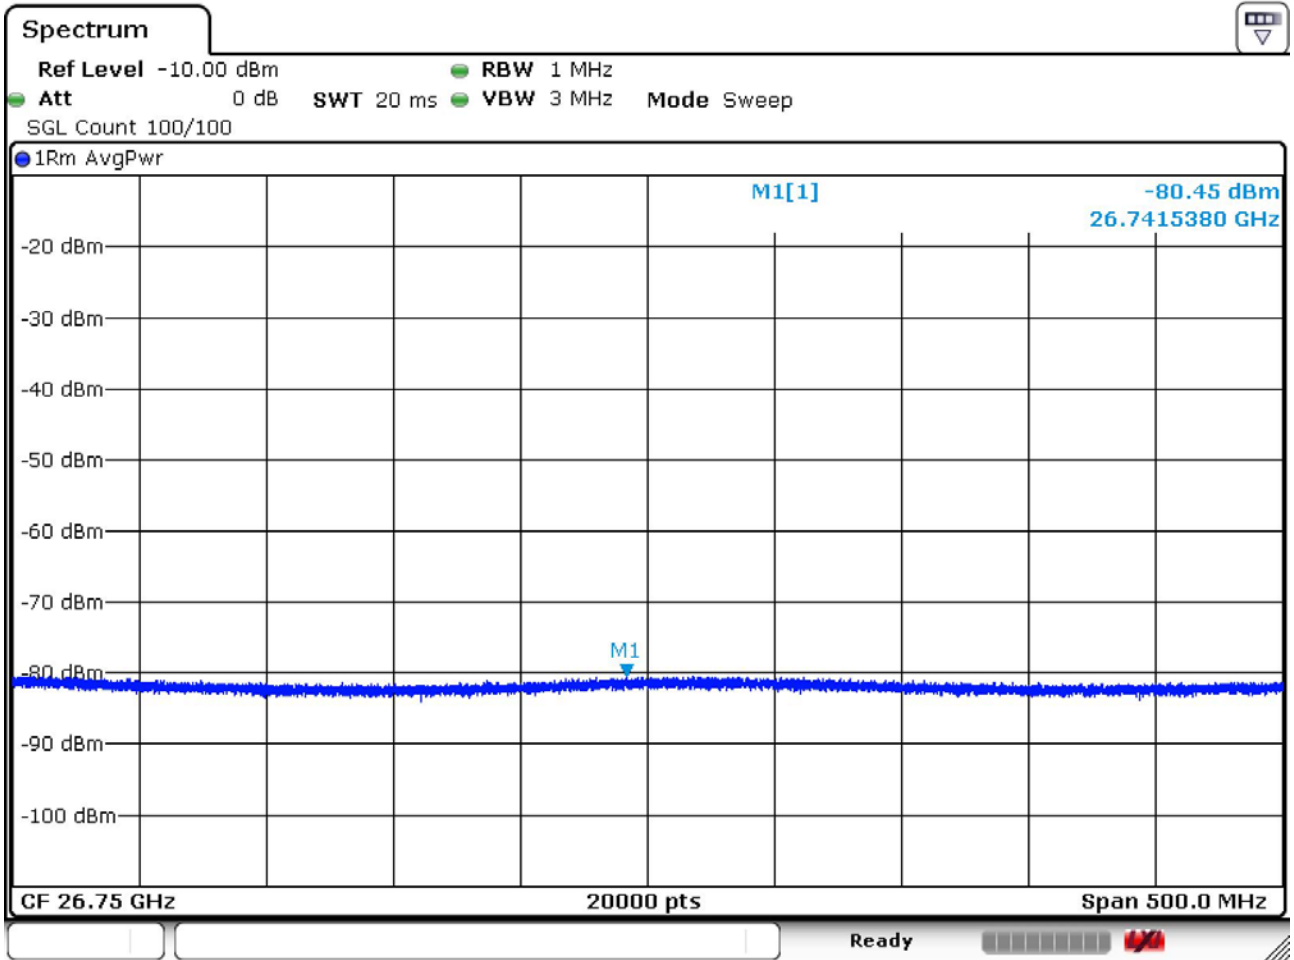

BAND 41. Conducted Spurious Plot 1 (10 MHz Ch.39700 QPSK RB 1, Offset 0)

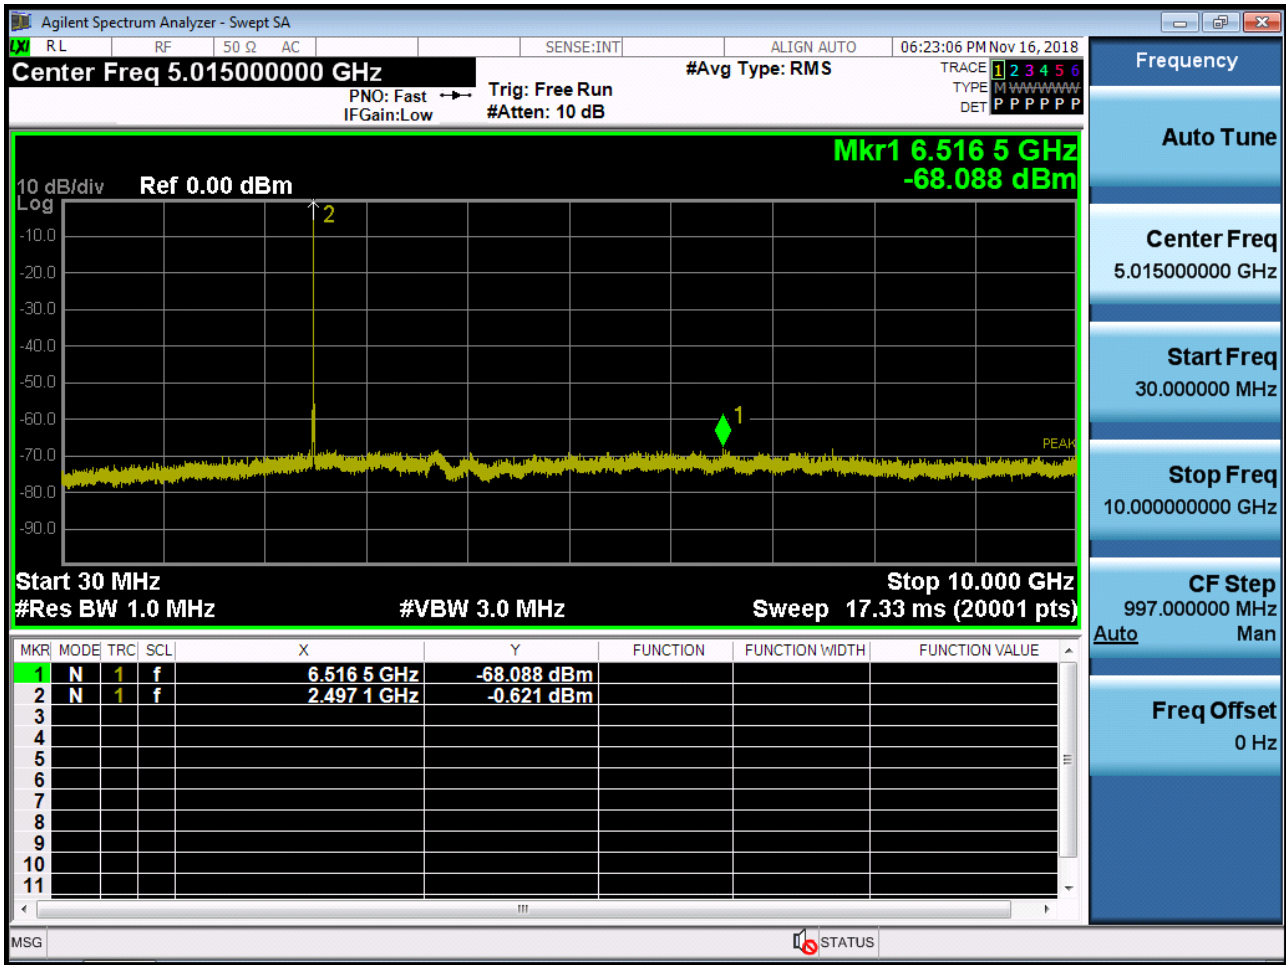


BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 39700 QPSK RB 1, Offset 0)

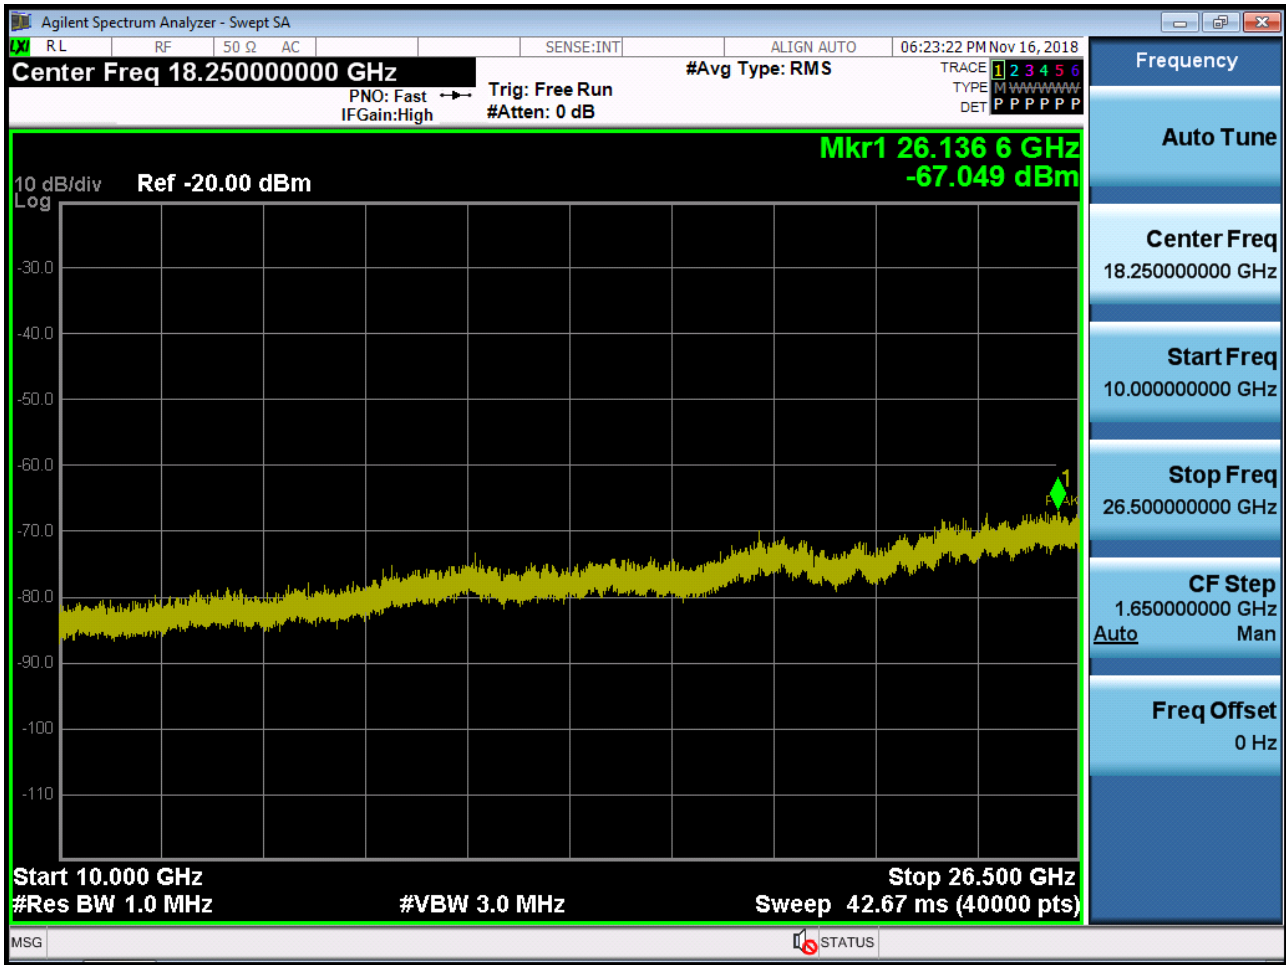



BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 40620 QPSK RB 1, Offset 0)

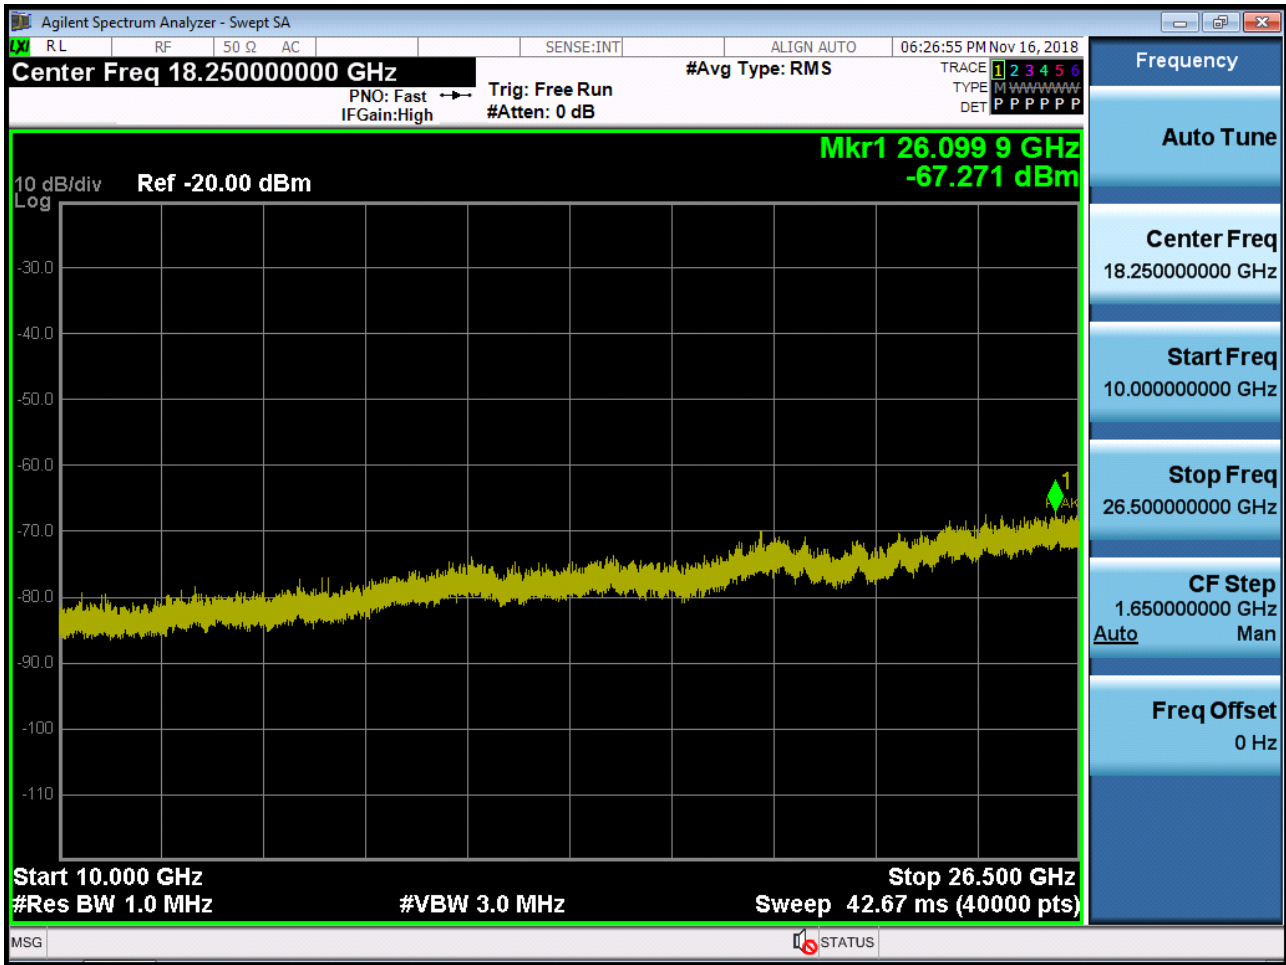




BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)




BAND 41. Conducted Spurious Plot 3 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)

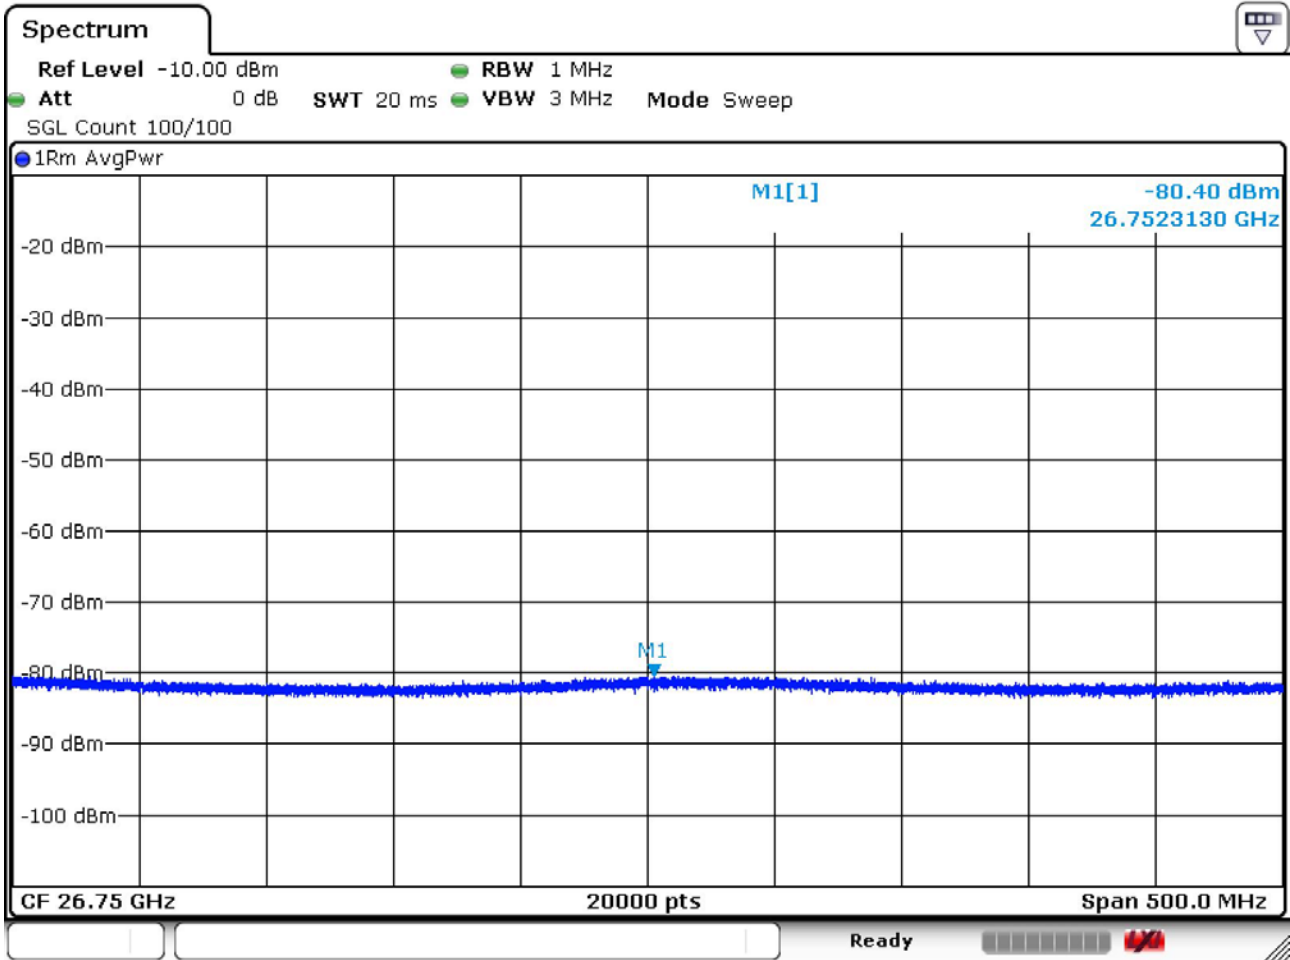






BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 39725 QPSK RB 1, Offset 0)

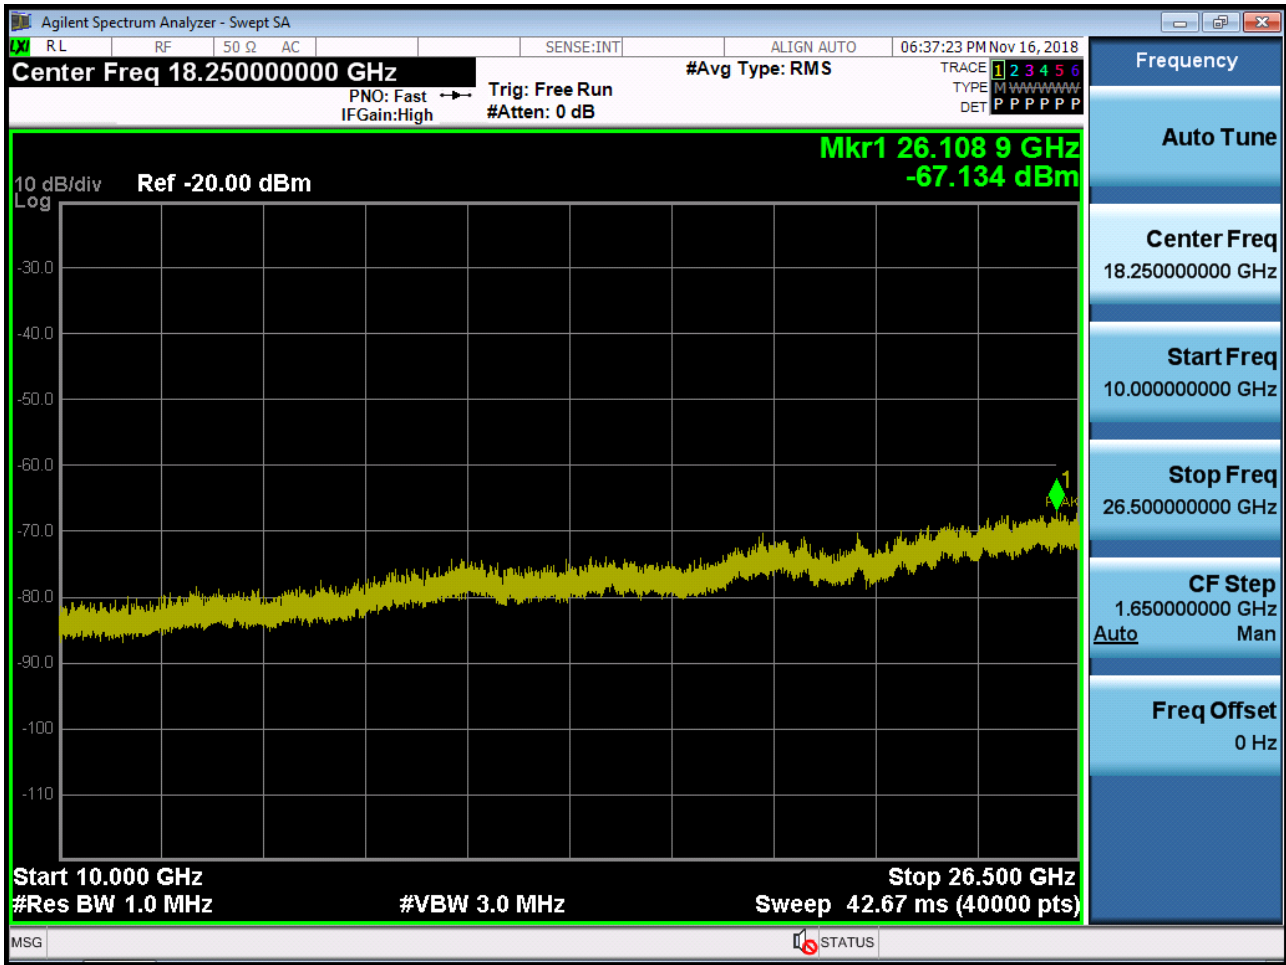

BAND 41. Conducted Spurious Plot 1 (15 MHz Ch.40620 QPSK RB 1, Offset 0)

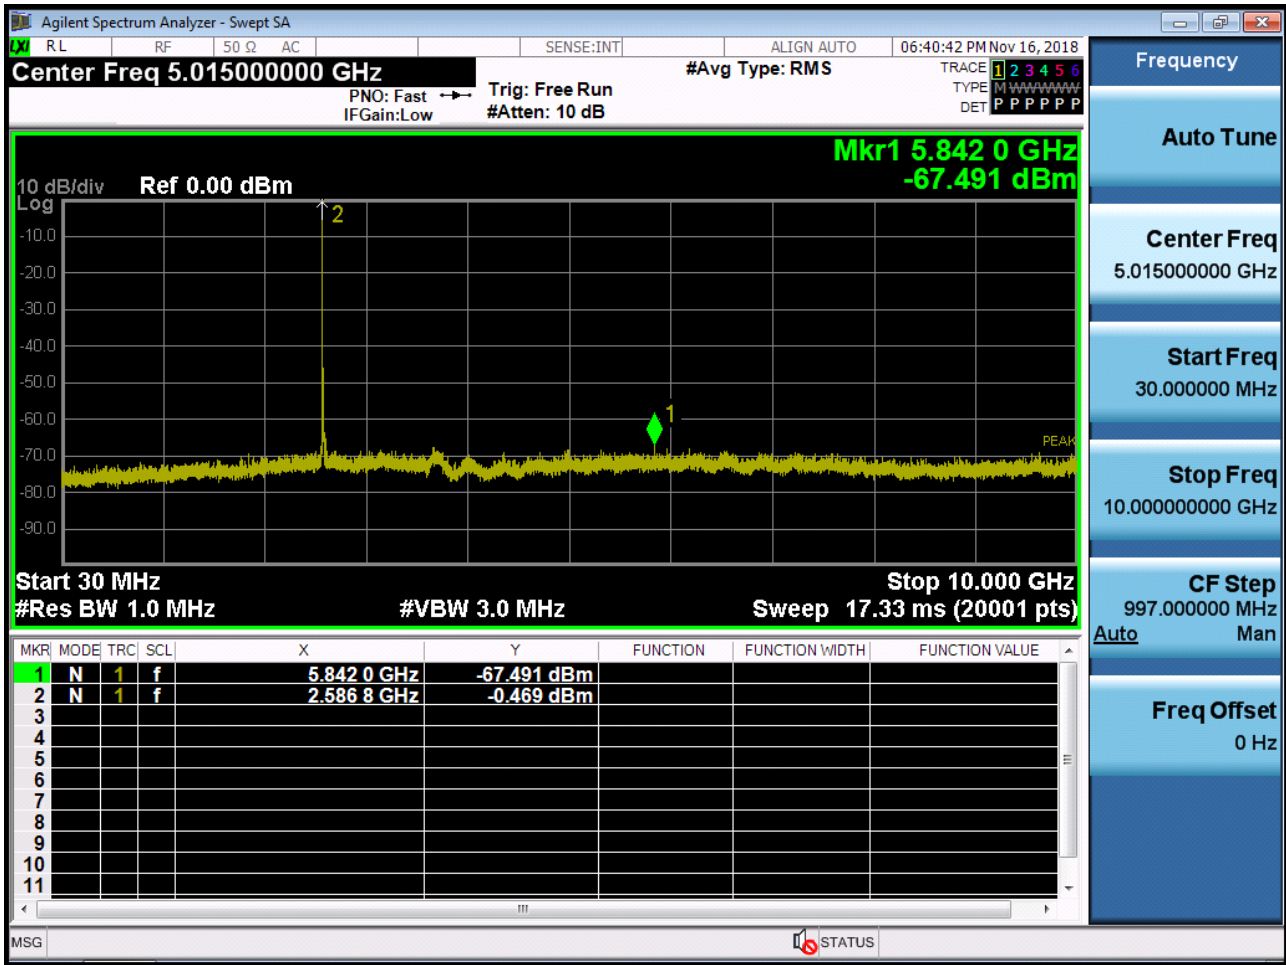


BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 40620 QPSK RB 1, Offset 0)






BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 41515 QPSK RB 1, Offset 0)

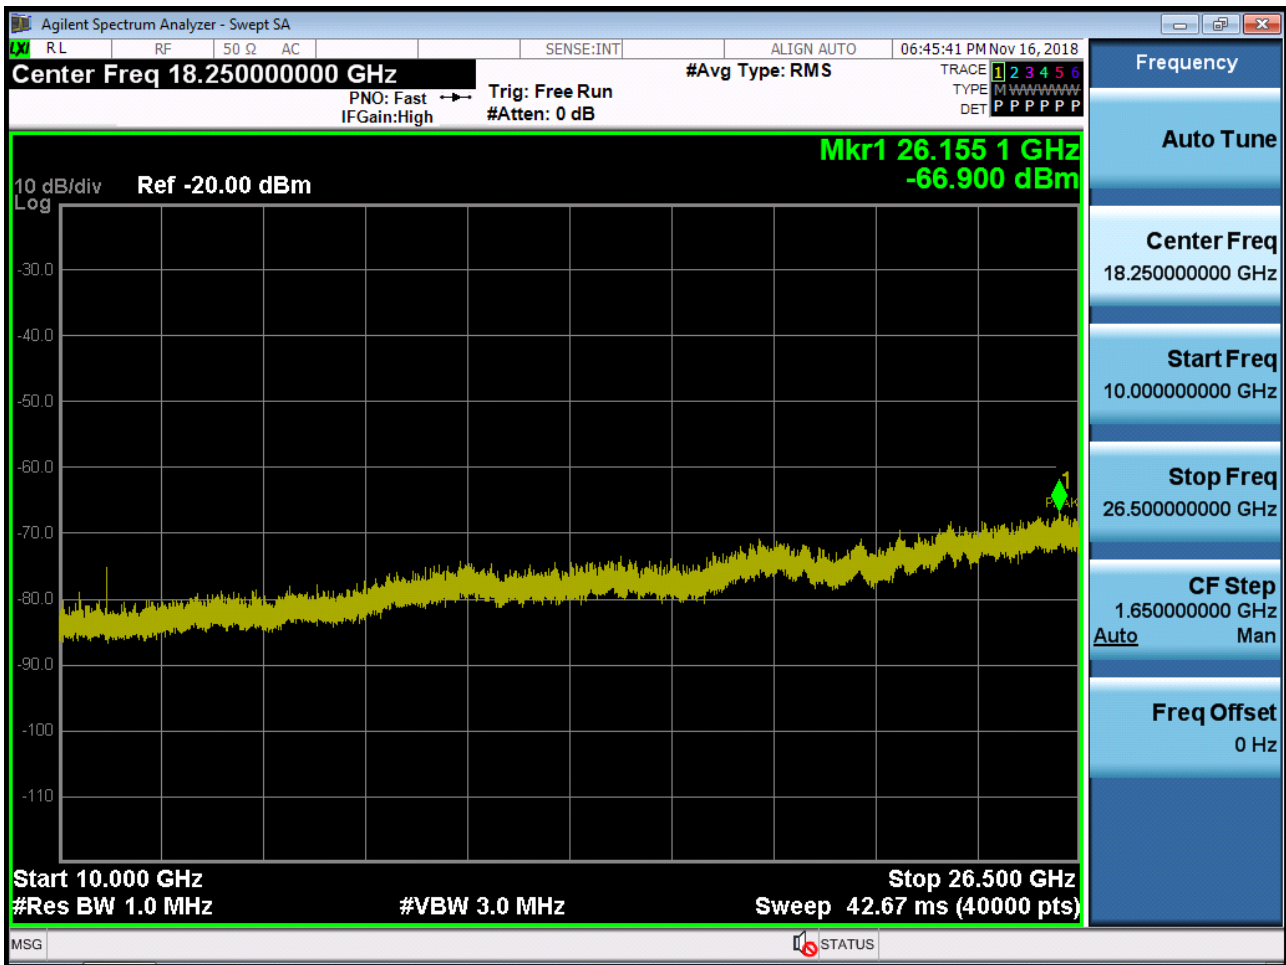


BAND 41. Conducted Spurious Plot 3 (15 MHz Ch. 41515 QPSK RB 1, Offset 0)

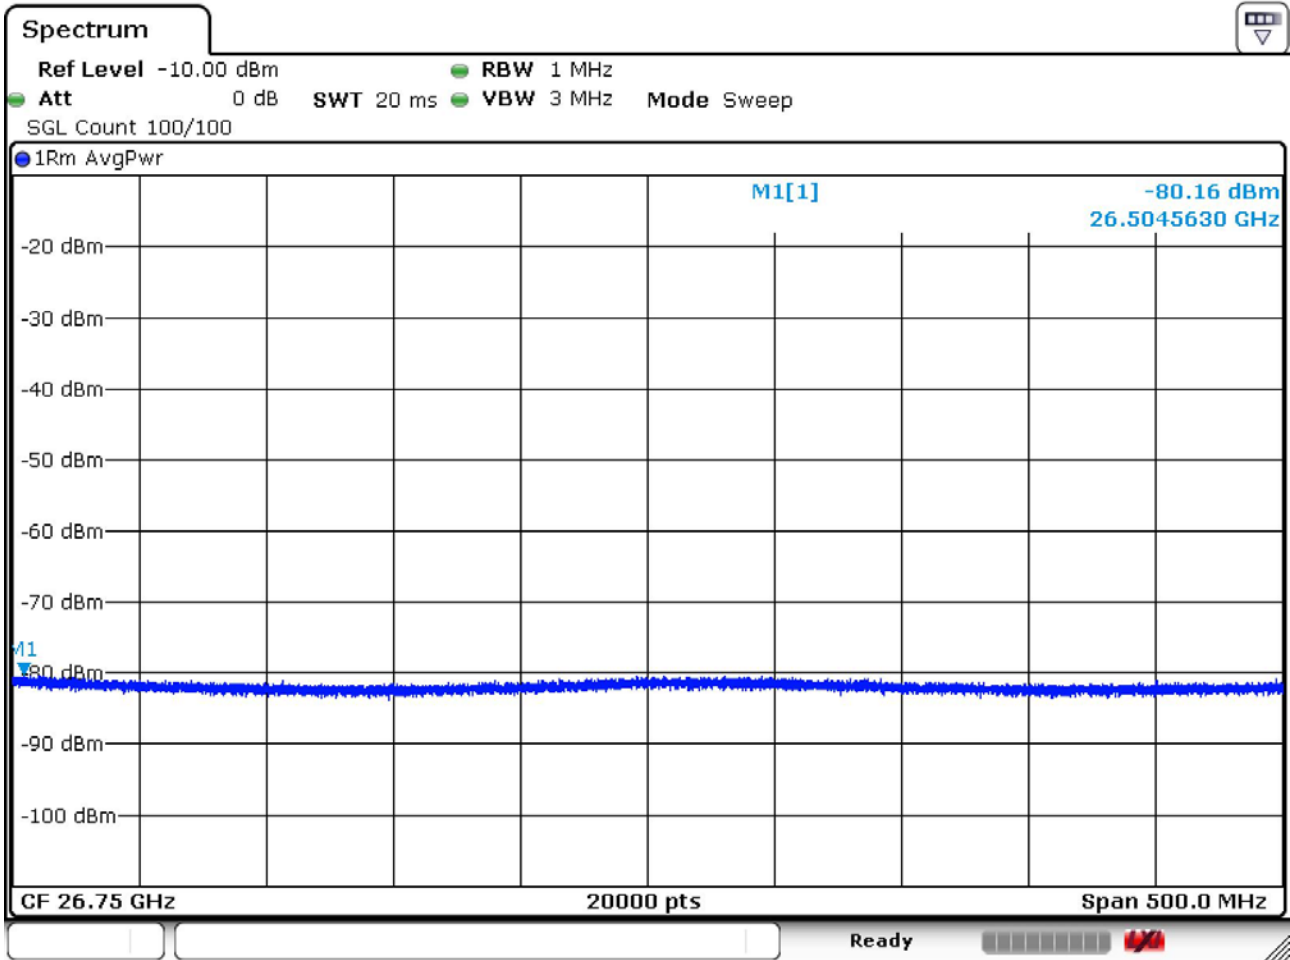






BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 39750 QPSK RB 1, Offset 0)

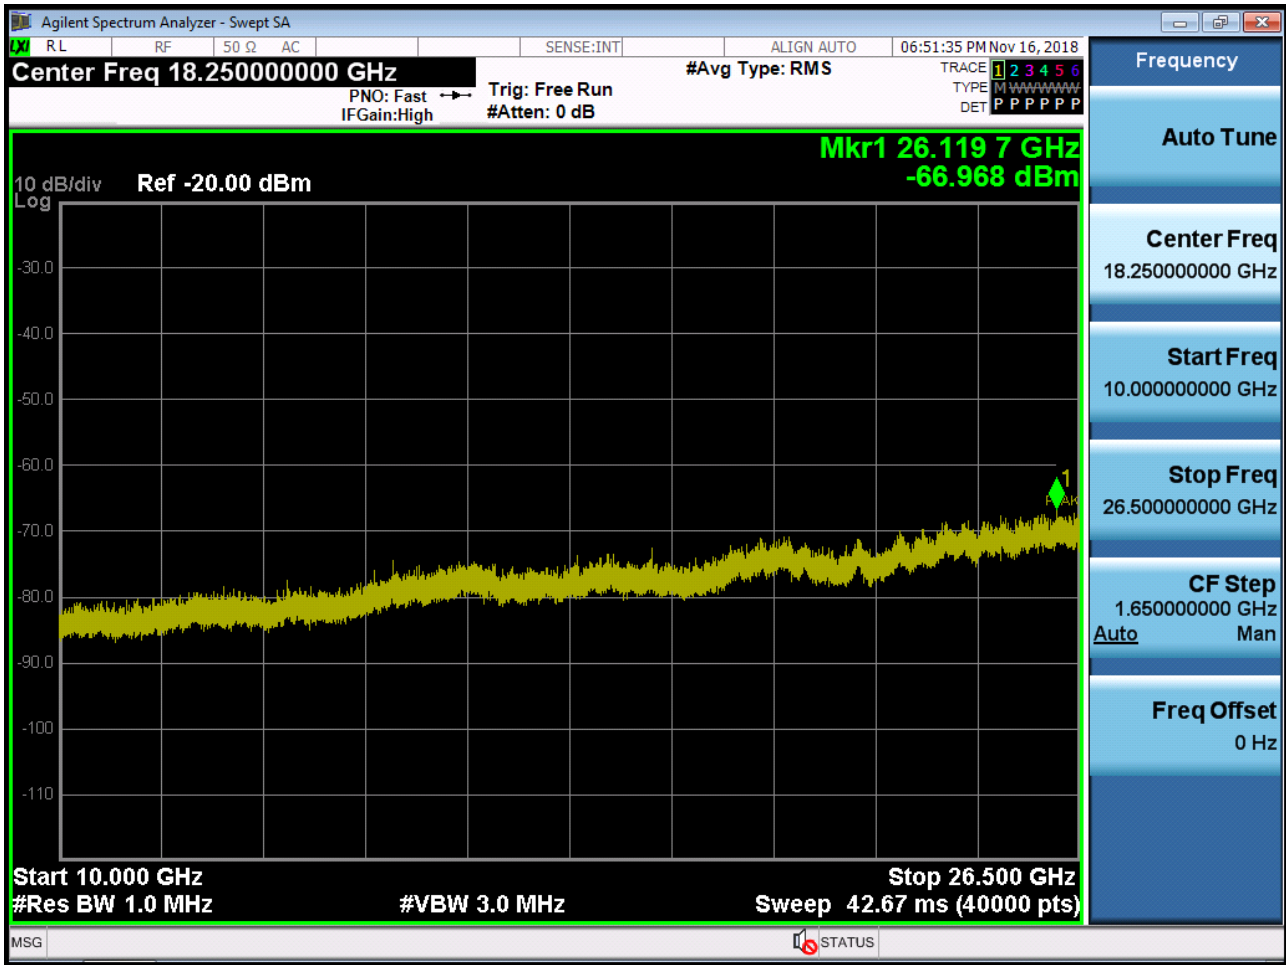



BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 40620 QPSK RB 1, Offset 0)

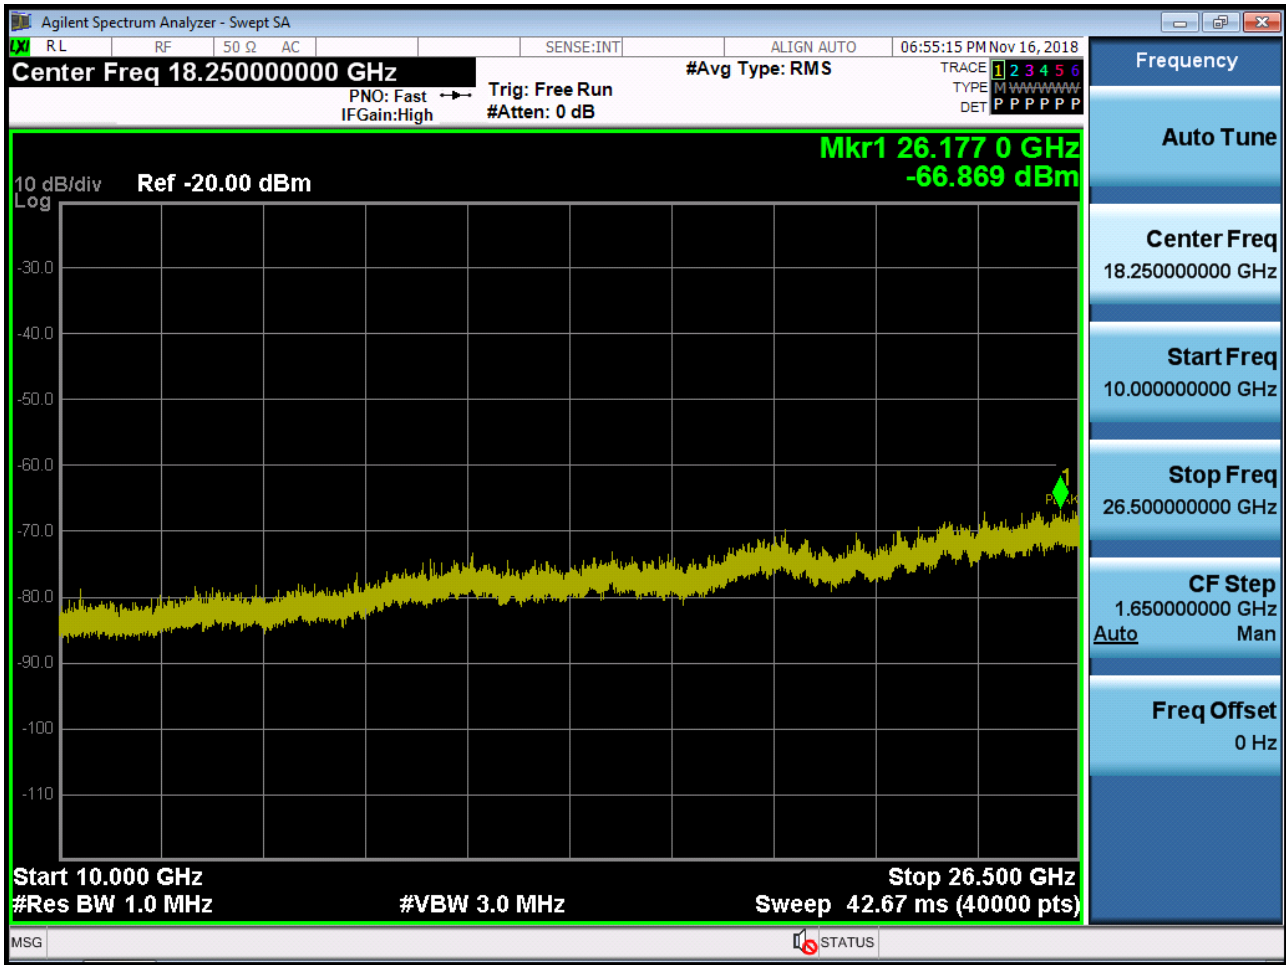




BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 41490 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 3 (20 MHz Ch. 41490 QPSK RB 1, Offset 0)

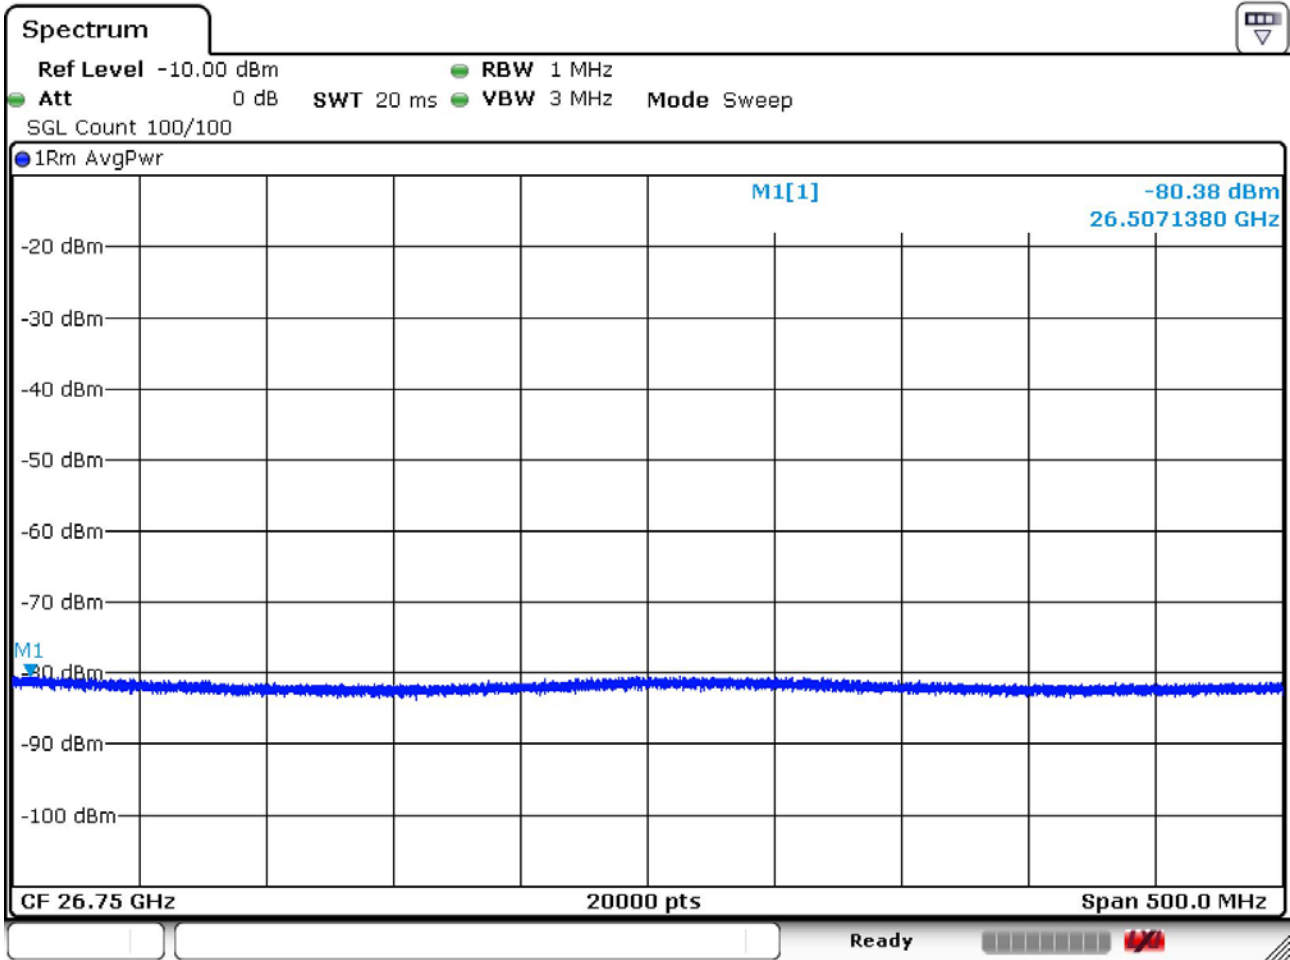

## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1811-FC023-P
2	HCT-RF-1811-FC024-P
3	HCT-RF-1811-FC025-P
4	HCT-RF-1811-FC026-P
5	HCT-RF-1811-FC027-P
6	HCT-RF-1811-FC028-P