

PART 22 MEASUREMENT REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea


Date of Testing:
06/10/2021 - 07/16/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2106100066-02.A3L

FCC ID:	A3LSMF711JPN
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SC-54B
Additional Model(s): SCG12
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 22
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President








FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset
Page 1 of 58		


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	19
7.4	Band Edge Emissions at Antenna Terminal	35
7.5	Radiated Power (ERP)	42
7.6	Radiated Spurious Emissions Measurements.....	45
7.7	Frequency Stability / Temperature Variation	54
8.0	CONCLUSION.....	58

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 2 of 58





PART 22 MEASUREMENT REPORT



Mode	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
LTE Band 5	QPSK	829.0 - 844.0	0.067	18.29	0.111	20.44	9M03G7D
	16QAM	829.0 - 844.0	0.056	17.46	0.091	19.61	9M01W7D
	QPSK	826.5 - 846.5	0.066	18.21	0.109	20.36	4M51G7D
	16QAM	826.5 - 846.5	0.054	17.34	0.089	19.49	4M51W7D
	QPSK	825.5 - 847.5	0.067	18.27	0.110	20.42	2M70G7D
	16QAM	825.5 - 847.5	0.054	17.31	0.088	19.46	2M70W7D
	QPSK	824.7 - 848.3	0.065	18.16	0.107	20.31	1M10G7D
	16QAM	824.7 - 848.3	0.054	17.28	0.088	19.43	1M09W7D

Mode	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	824.2 - 848.8	0.372	25.71	0.610	27.86	243KGXW
EDGE	8-PSK	824.2 - 848.8	0.095	19.77	0.155	21.92	238KG7W
WCDMA	Spread Spectrum	826.4 - 846.6	0.061	17.84	0.100	19.990	4M17F9W

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 3 of 58

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset
Page 4 of 58		

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF711JPN**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

The Equipment Under Test (EUT) can operate in one of three physical configurations – “Open”, “Half open” and “Closed”. All emissions are investigated in three modes for compliance, and the worst case radiated emissions data is shown in this report.

Test Device Serial No.: 0711M, 0405M, 0030M, 0716M, 0879M, 0035M, 0037M, 0015M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer



2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 3.2 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad(WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 5 of 58

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 6 of 58

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	AP2
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
-	ETS	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	ETS
-	LTx1	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx1
-	LTx3	Licensed Transmitter Cable Set	2/26/2021	Annual	2/26/2022	LTx3
-	LTx4	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx4
Agilent	E5515C	Wireless Communications Test Set	N/A			GB45360985
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Agilent	N9030A	50GHz PXA Signal Analyzer	1/20/2021	Annual	1/20/2022	US51350301
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Com-Power	AL-130R	Active Loop Antenna	8/22/2019	Biennial	8/22/2021	121085
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Triennial	8/7/2021	9203-2178
Espec	ESX-2CA	Environmental Chamber	8/27/2020	Annual	8/27/2022	17620
ETS Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	00114451
Keysight Technologies	N9020A	MXA Signal Analyzer	9/22/2020	Annual	9/22/2021	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	10/16/2020	Annual	10/16/2021	MY54490576
Keysight Technologies	N9030A	PXA Signal Analyzer	9/2/2020	Annual	9/2/2021	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/17/2020	Annual	9/17/2021	MY57141001
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	1/21/2021	Annual	1/21/2022	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	2/10/2021	Annual	2/10/2022	103187
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 8 of 58	

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info



D = Data transmission, telemetry, telecommand

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 9 of 58

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 10 of 58

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF711JPN
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool Beta 8.

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset
Page 11 of 58		

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

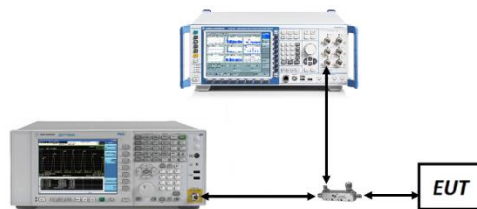



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF711JPN	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 12 of 58

LTE Band 5

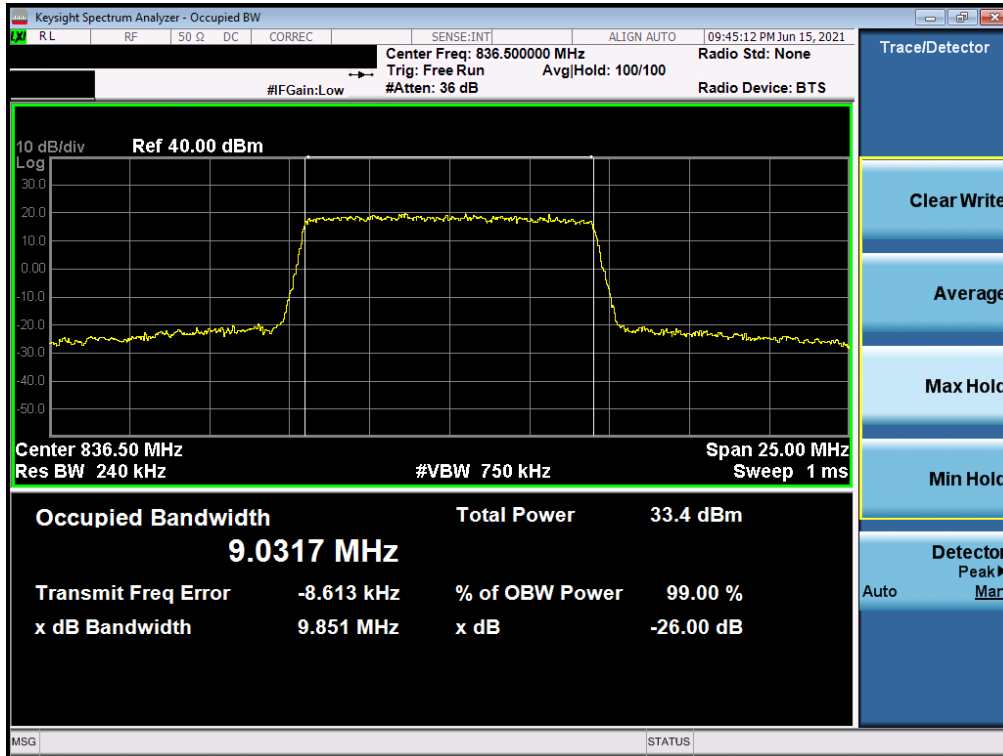


Plot 7-1. Occupied Bandwidth Plot (LTE Band 5 - 10MHz QPSK - Full RB)

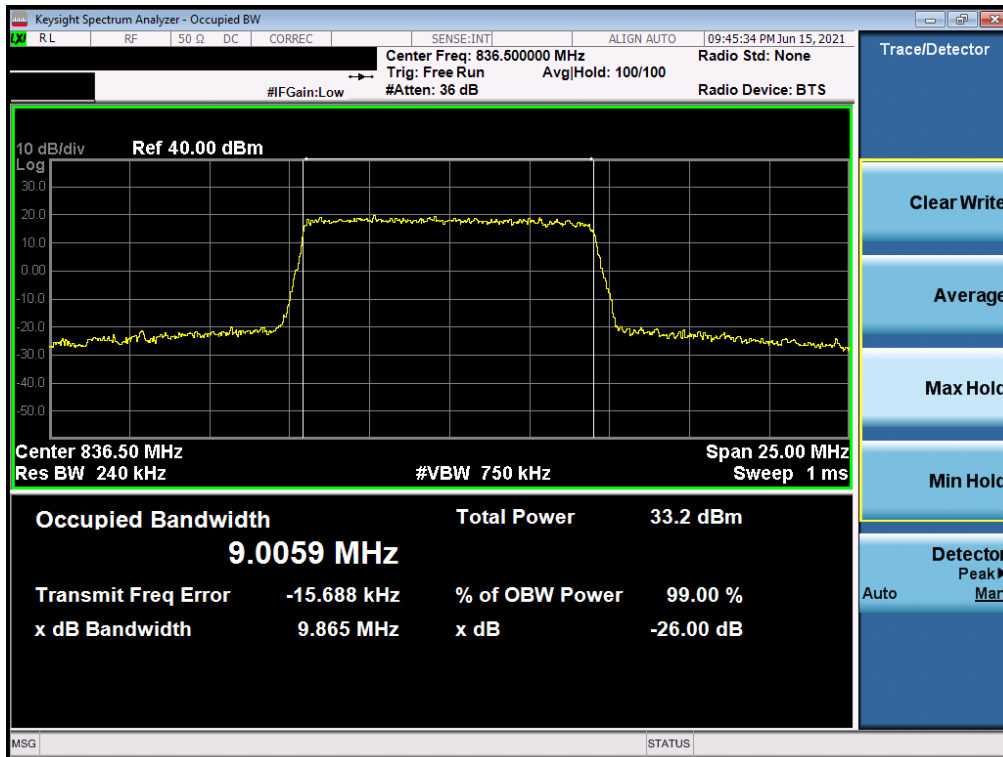


Plot 7-2. Occupied Bandwidth Plot (LTE Band 5 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 13 of 58

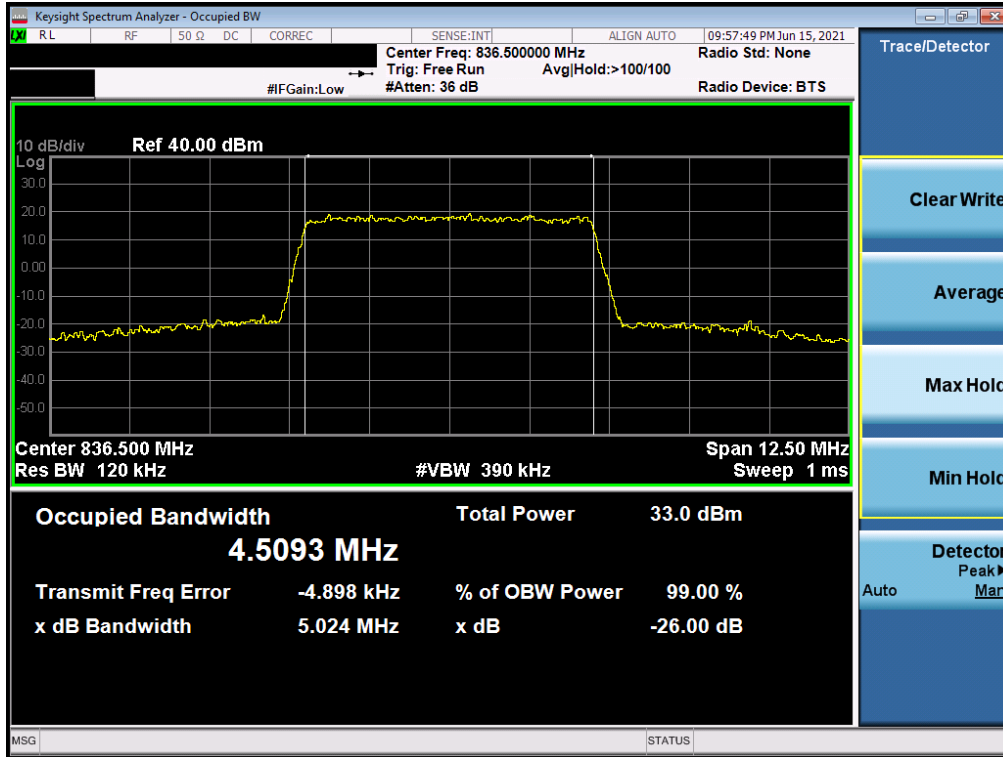


Plot 7-3. Occupied Bandwidth Plot (LTE Band 5 - 5MHz QPSK - Full RB)

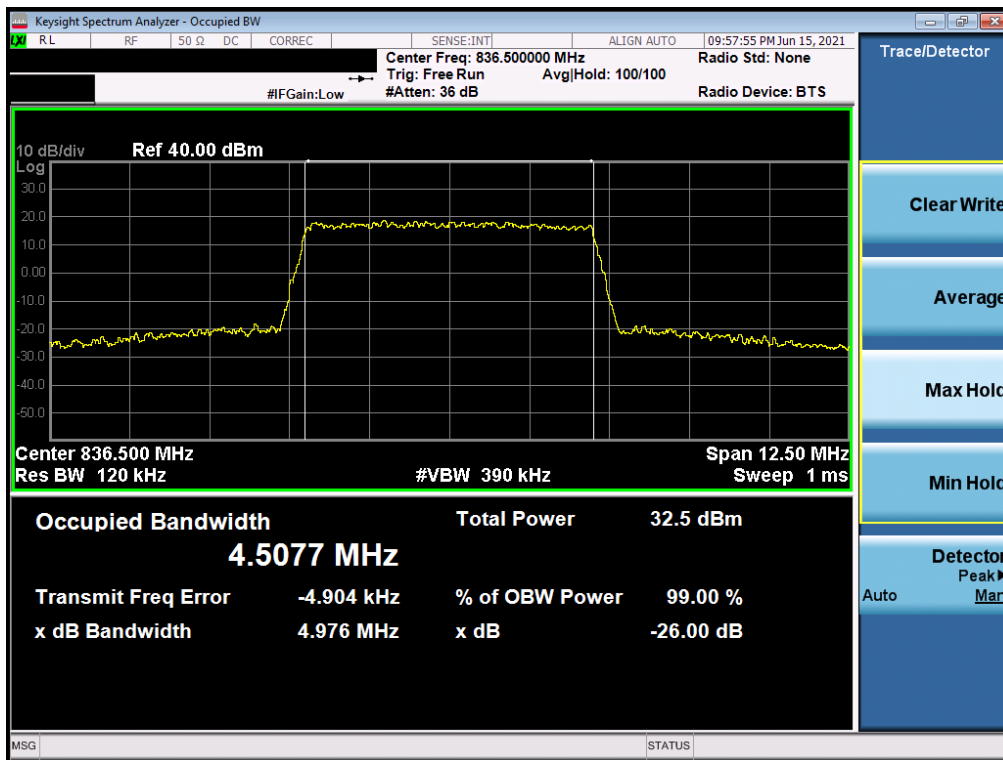


Plot 7-4. Occupied Bandwidth Plot (LTE Band 5 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 14 of 58

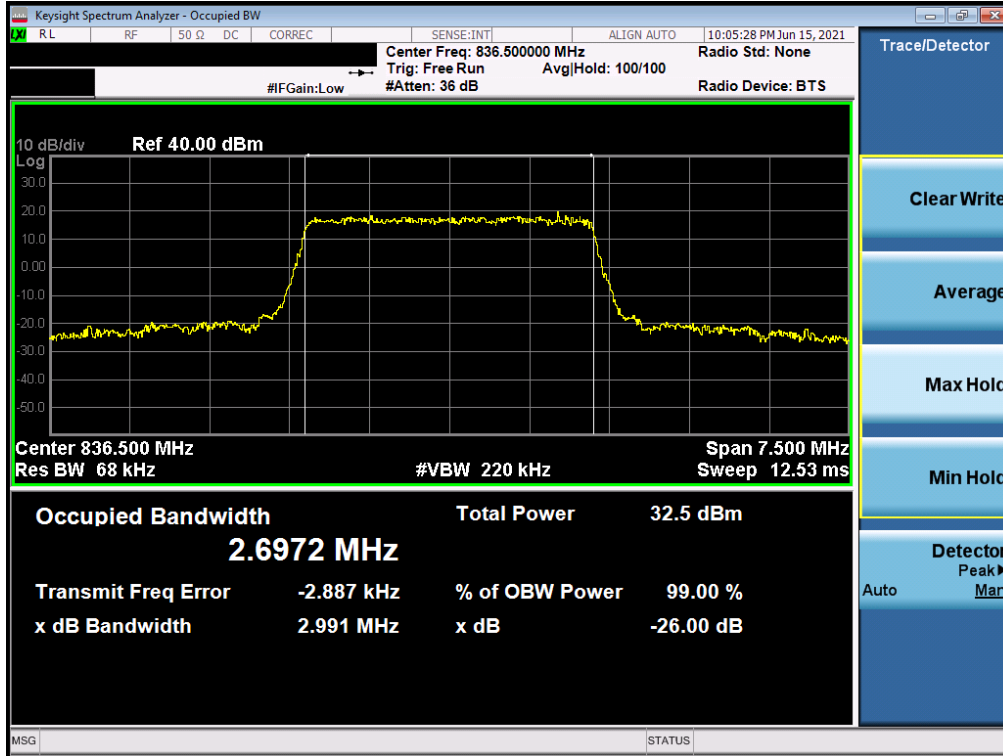

Plot 7-5. Occupied Bandwidth Plot (LTE Band 5 - 3MHz QPSK - Full RB)

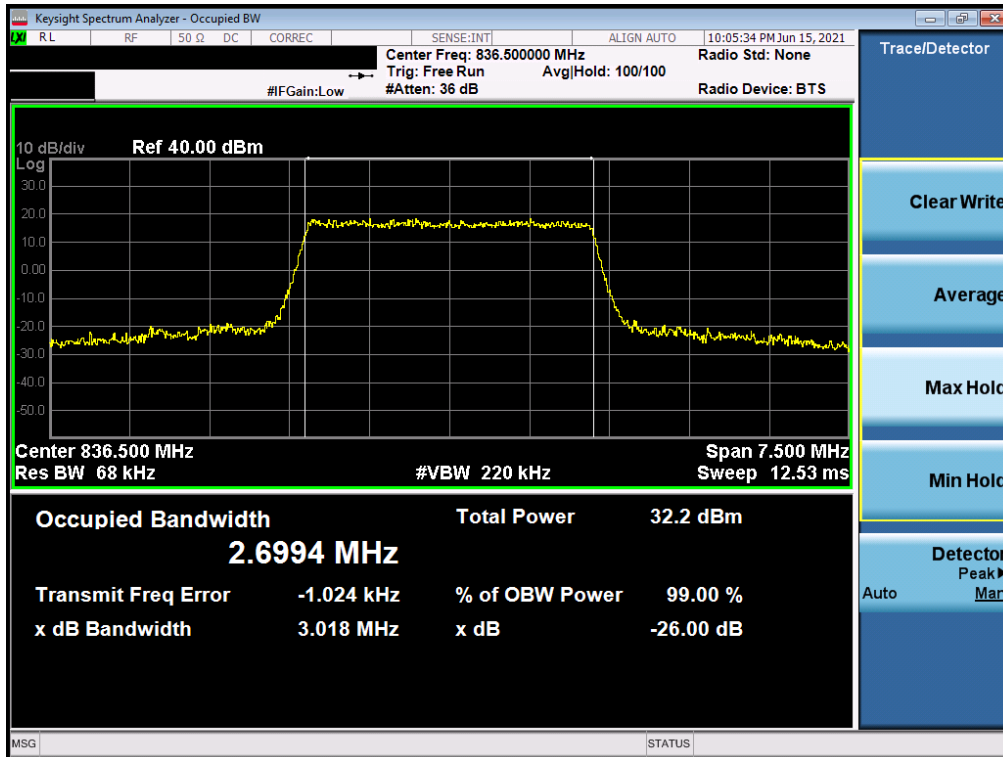


Plot 7-6. Occupied Bandwidth Plot (LTE Band 5 - 3MHz 16-QAM - Full RB)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 15 of 58




Plot 7-7. Occupied Bandwidth Plot (LTE Band 5 - 1.4MHz QPSK - Full RB)

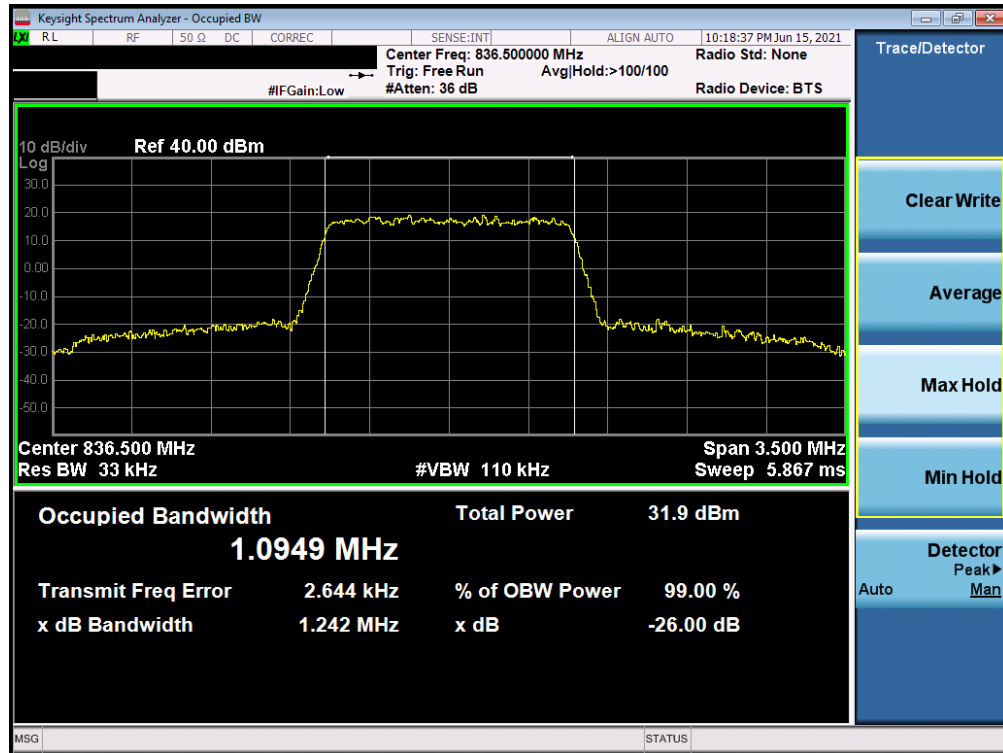


Plot 7-8. Occupied Bandwidth Plot (LTE Band 5 - 1.4MHz 16-QAM - Full RB)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 16 of 58

GPRS Cell

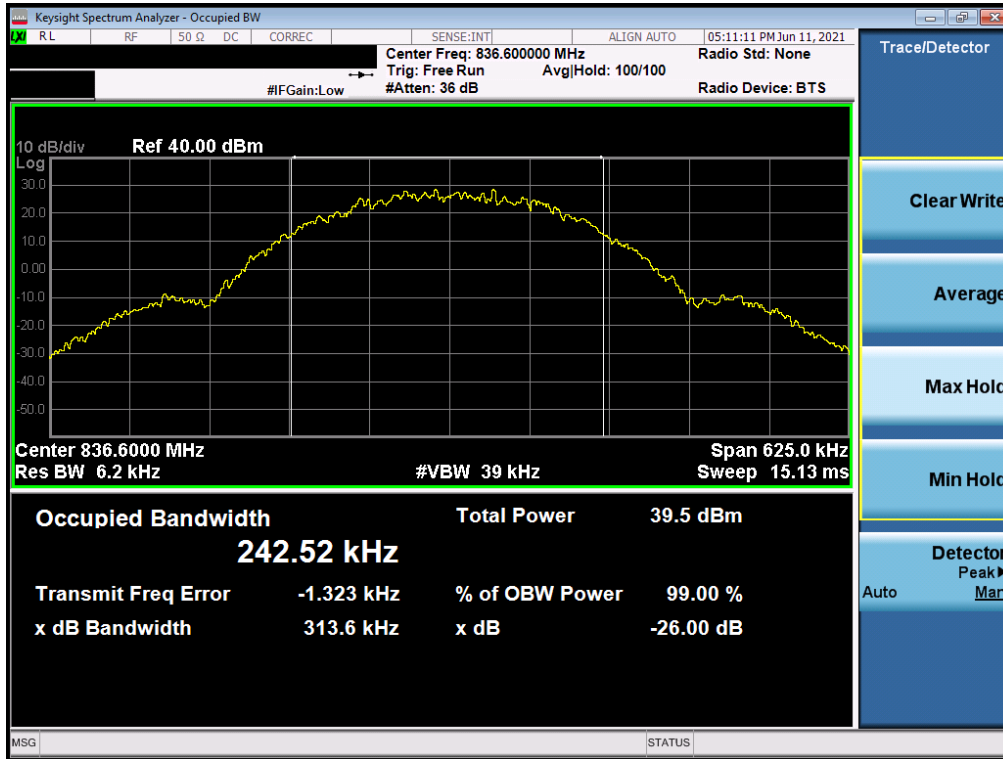


Plot 7-9. Occupied Bandwidth Plot (GPRS, Ch. 190)

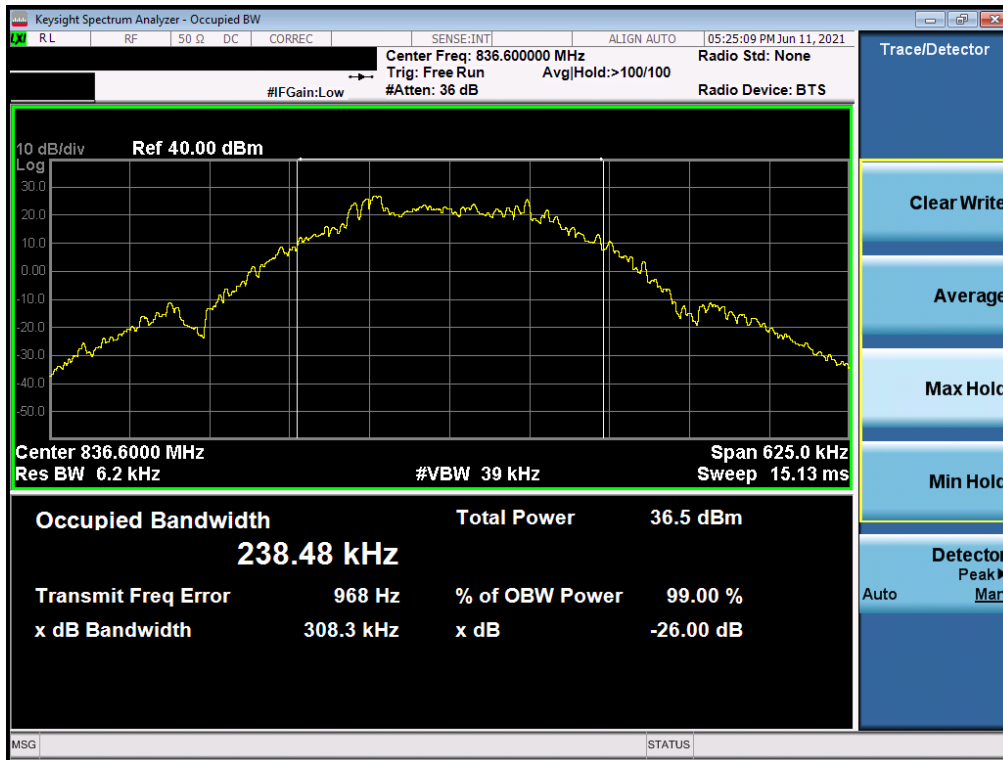

Plot 7-10. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 17 of 58

WCDMA Cell

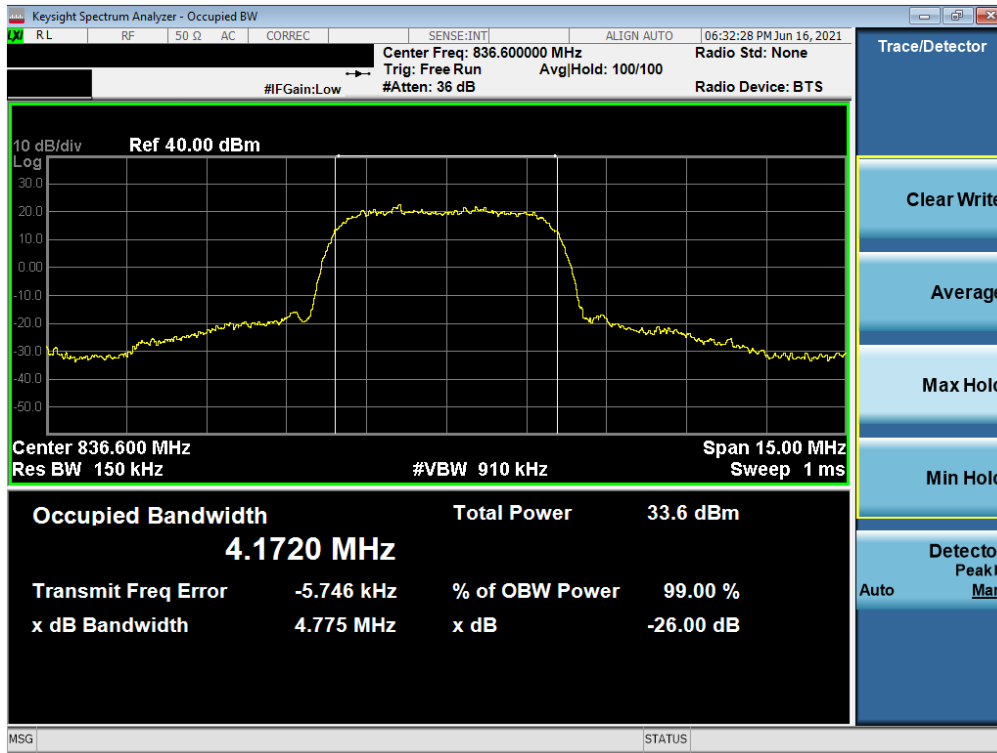

Plot 7-11. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 18 of 58

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

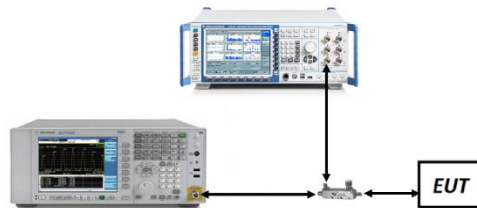


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF711JPN	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 19 of 58




Plot 7-14. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Low Channel)

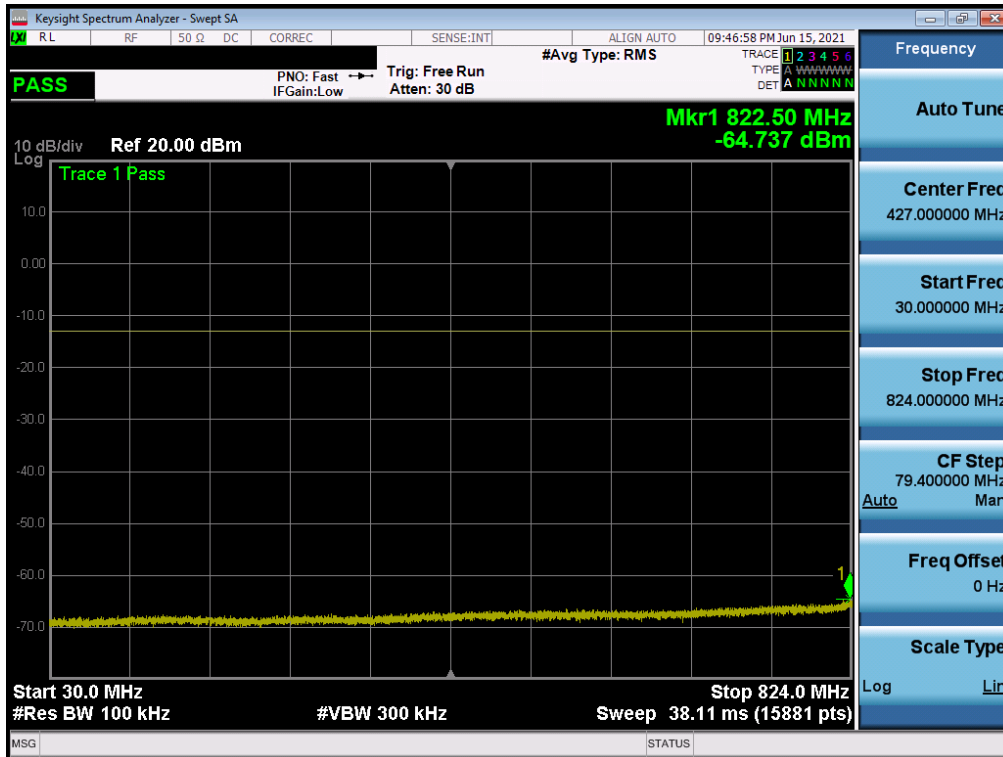


Plot 7-15. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Mid Channel)

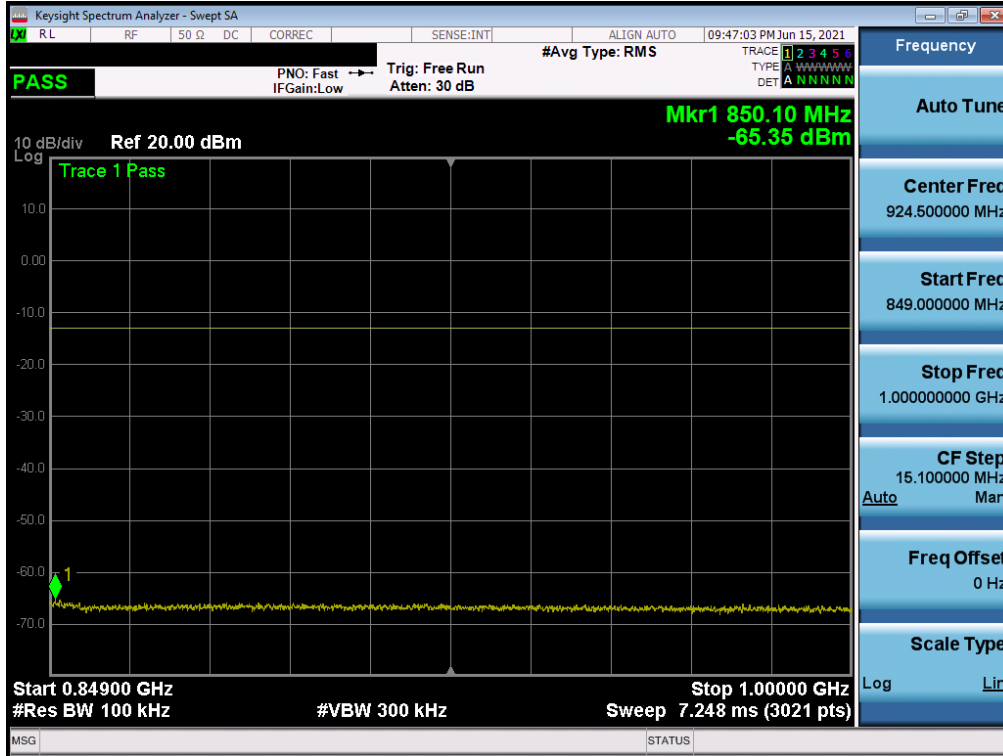


FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 21 of 58

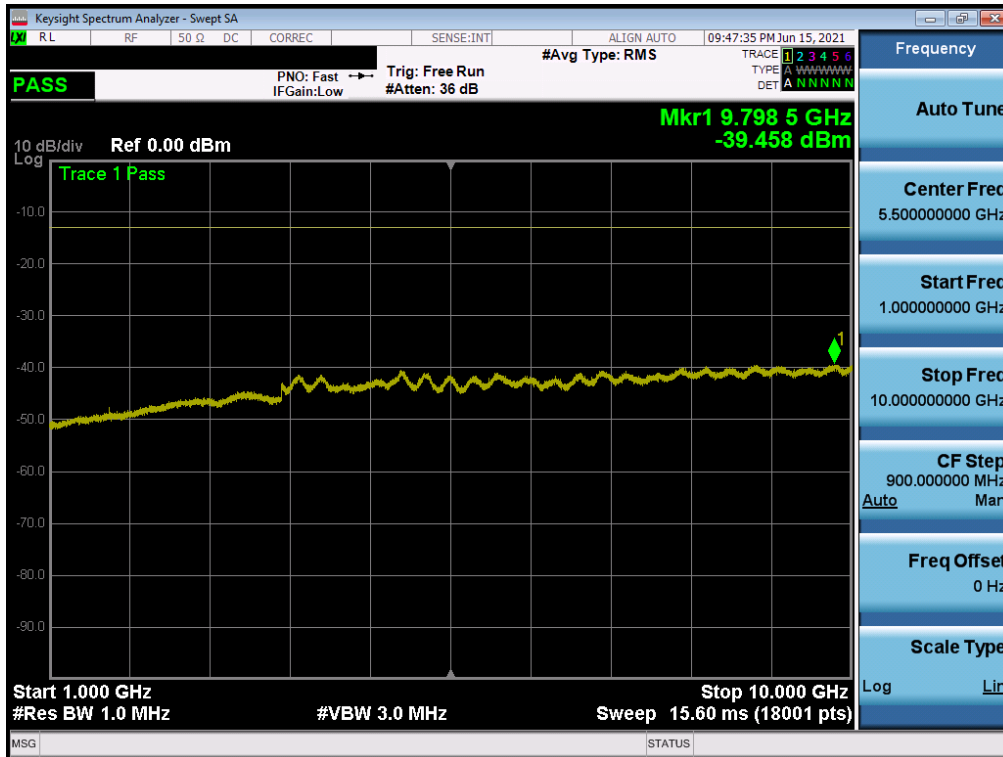


Plot 7-16. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Mid Channel)




Plot 7-17. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Mid Channel)

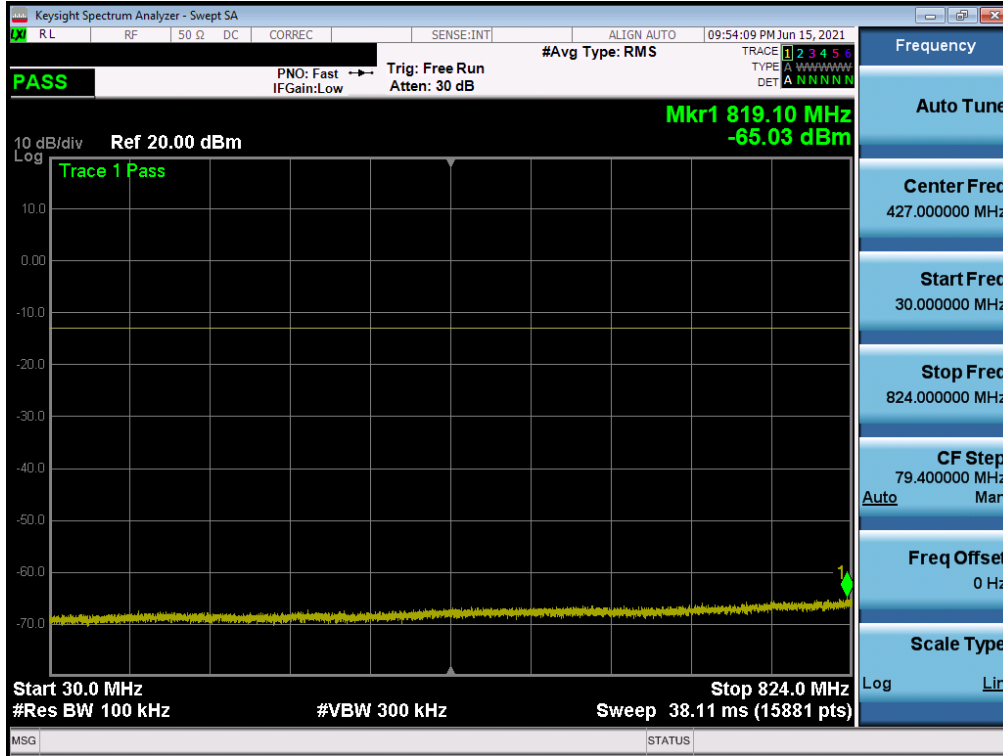


FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 22 of 58

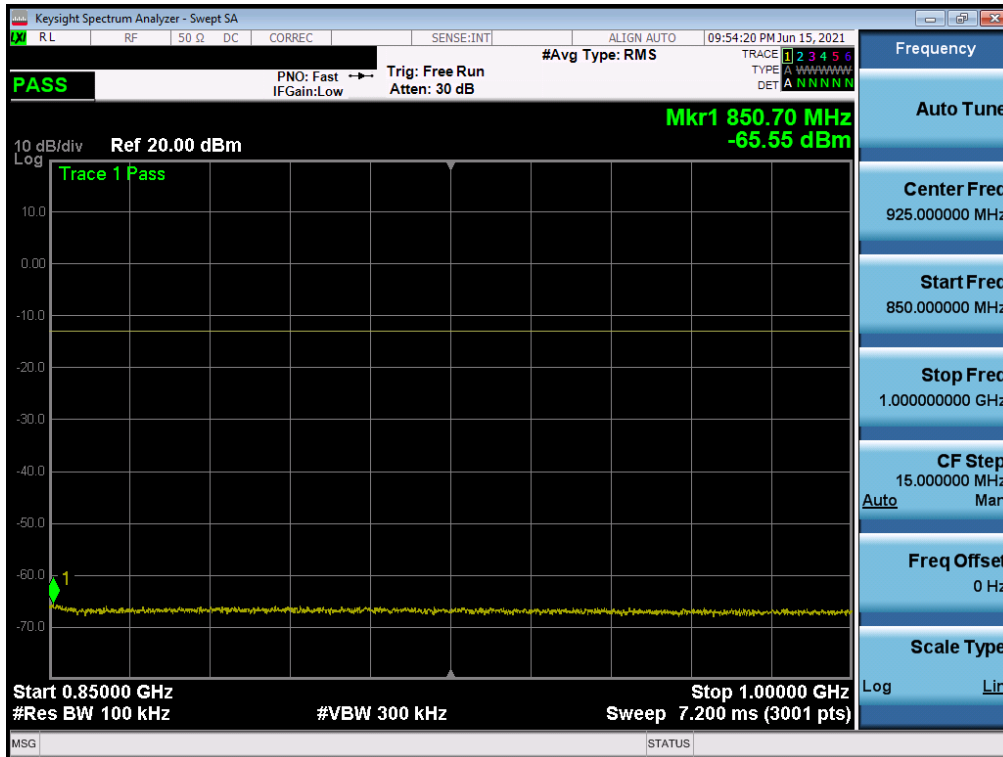


Plot 7-18. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - High Channel)






Plot 7-19. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - High Channel)

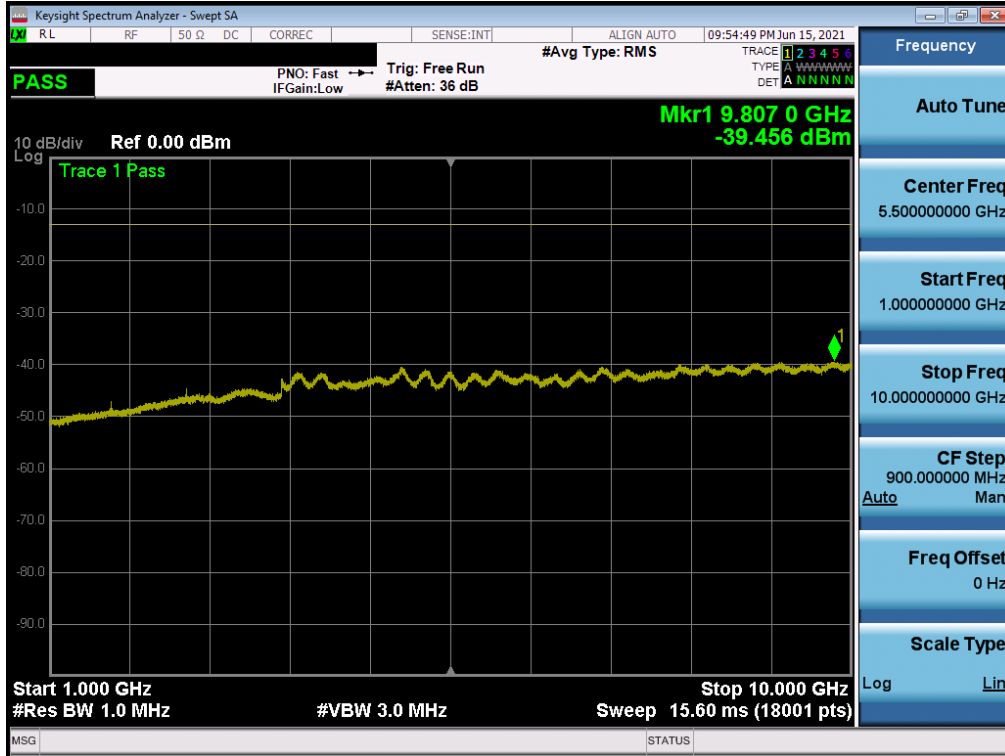
FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 23 of 58




Plot 7-20. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - High Channel)

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 24 of 58

GSM/GPRS Cell

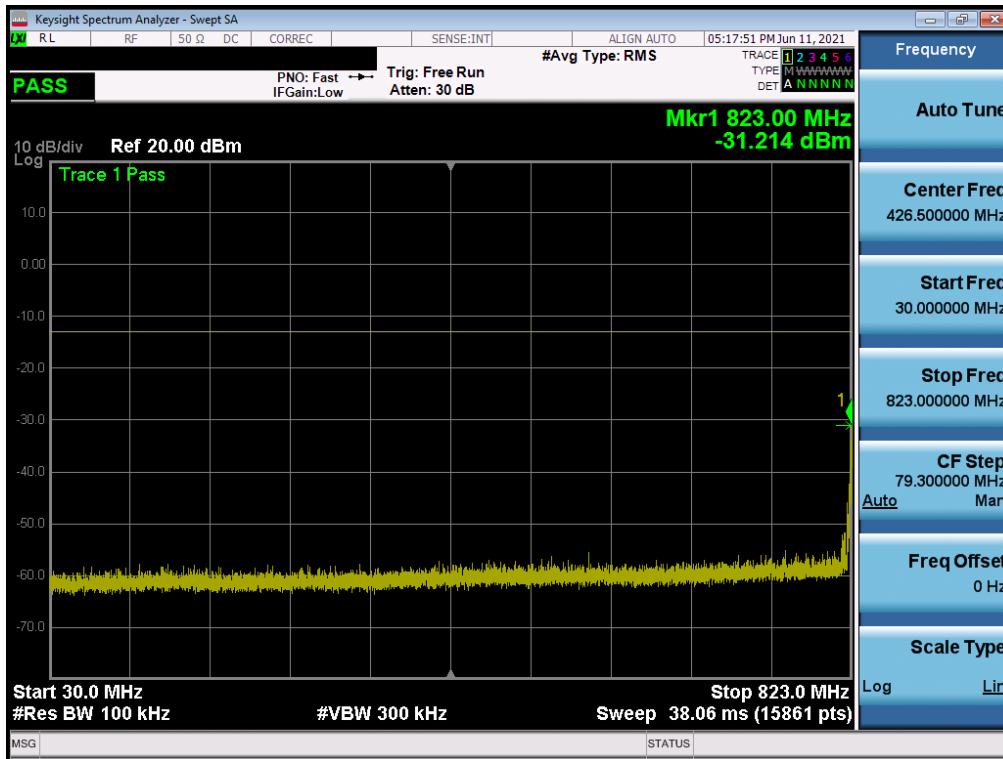


Plot 7-21. Conducted Spurious Plot (GPRS Ch. 128)

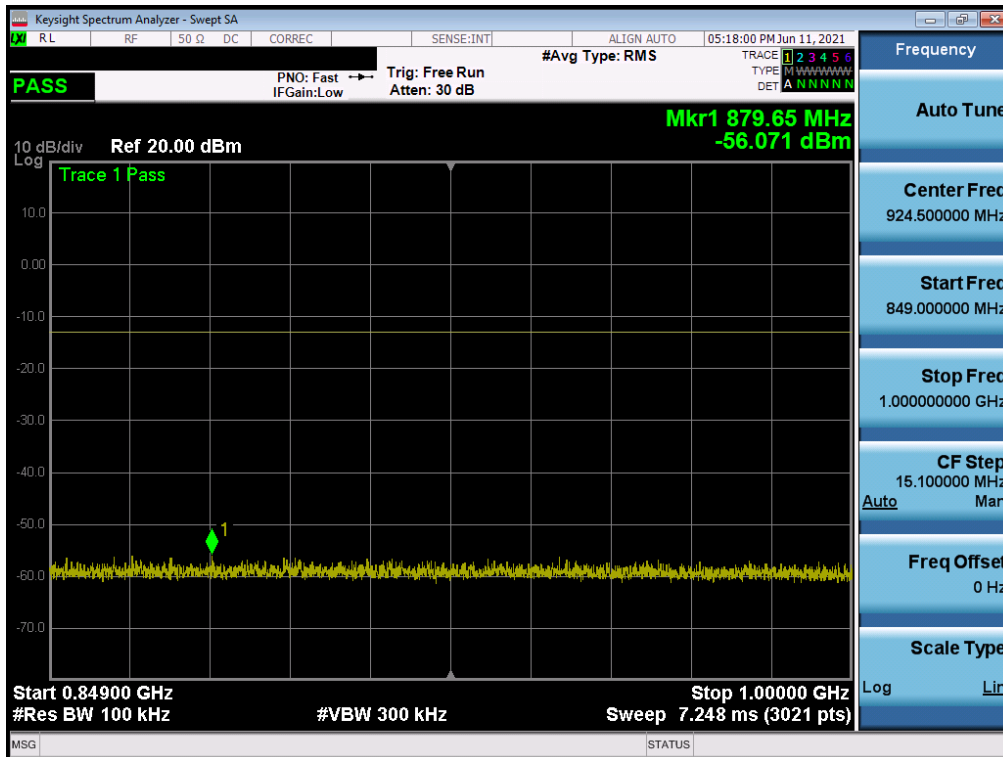


Plot 7-22. Conducted Spurious Plot (GPRS Ch. 128)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 25 of 58

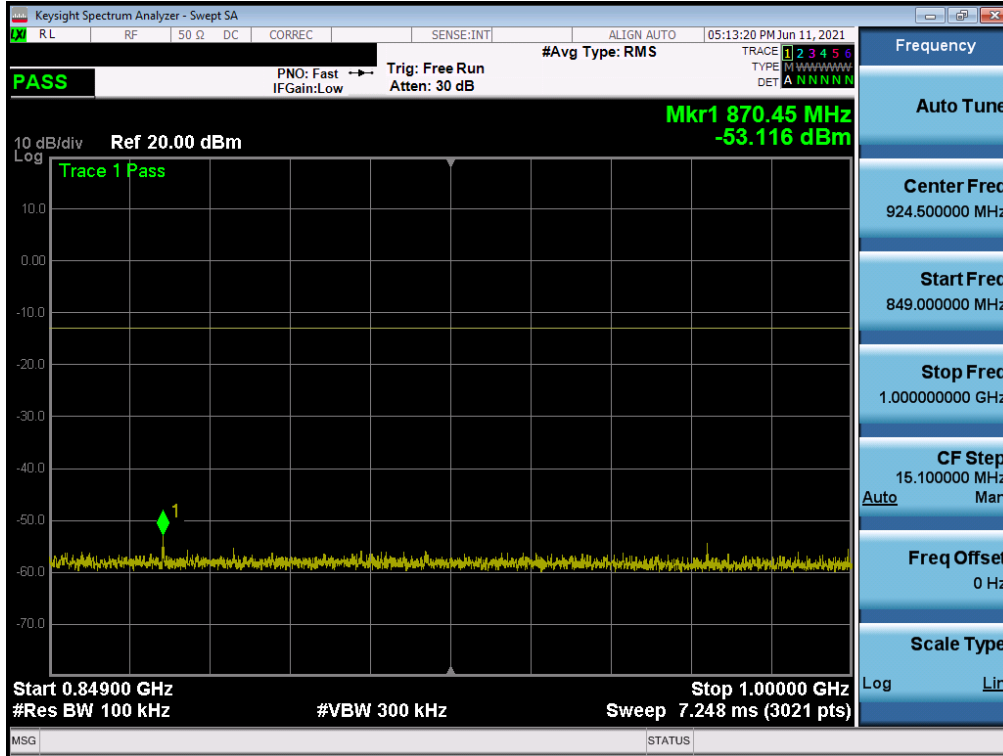


Plot 7-25. Conducted Spurious Plot (GPRS Ch. 190)

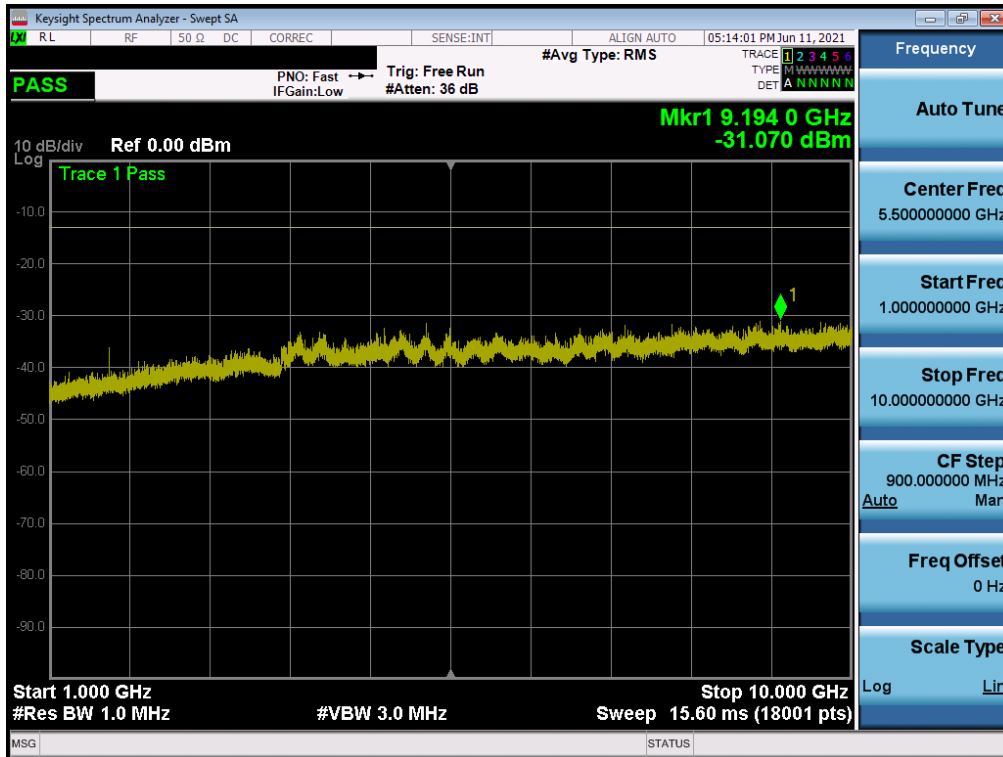


Plot 7-26. Conducted Spurious Plot (GPRS Ch. 190)

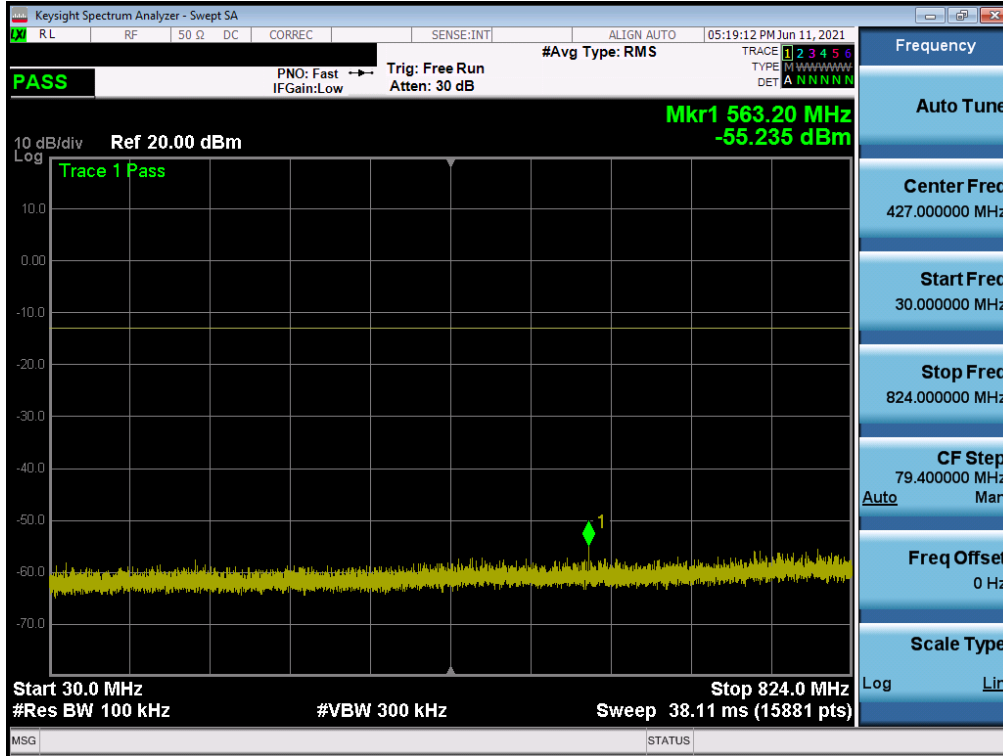


FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 27 of 58

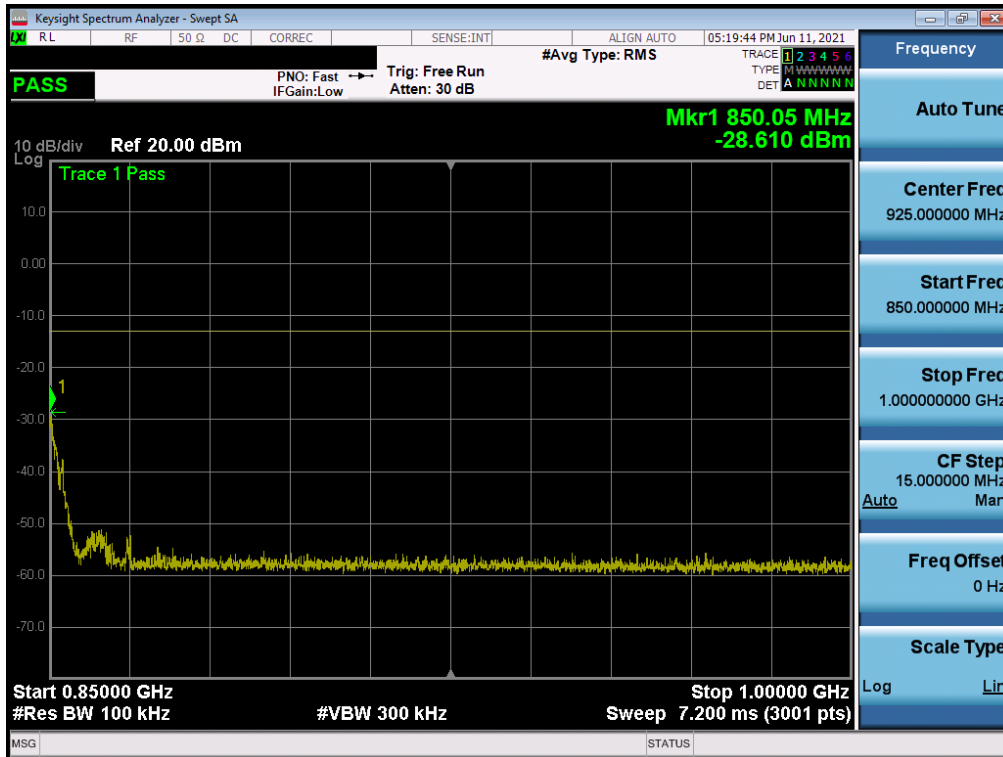


Plot 7-27. Conducted Spurious Plot (GPRS Ch. 251)






Plot 7-28. Conducted Spurious Plot (GPRS Ch. 251)

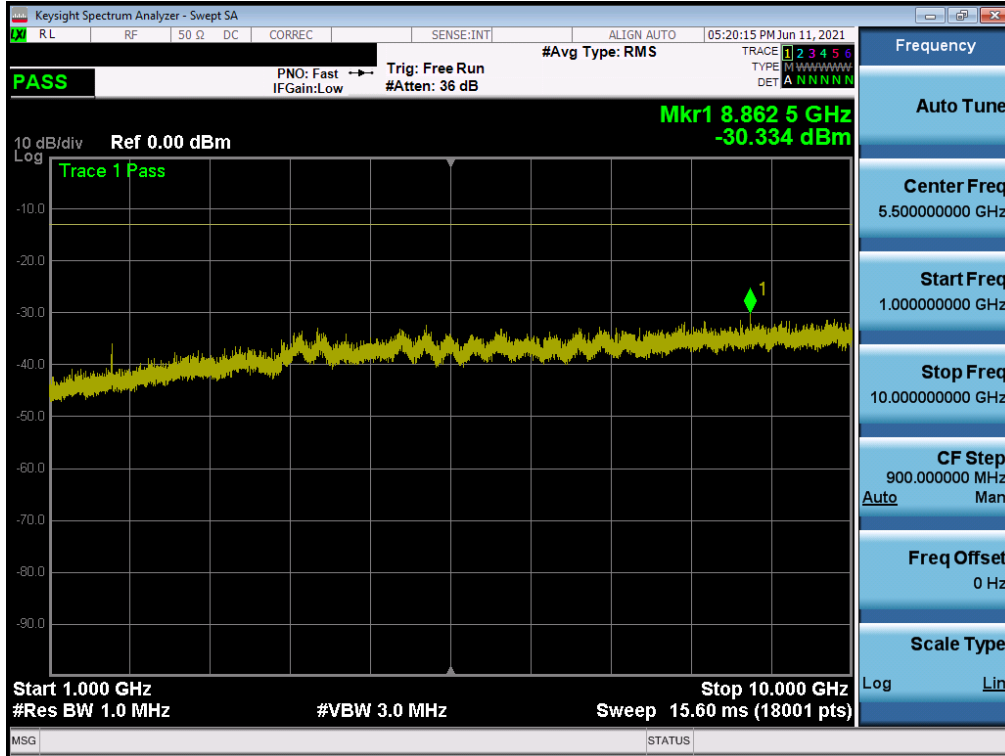
FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 28 of 58




Plot 7-29. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 29 of 58

WCDMA Cell

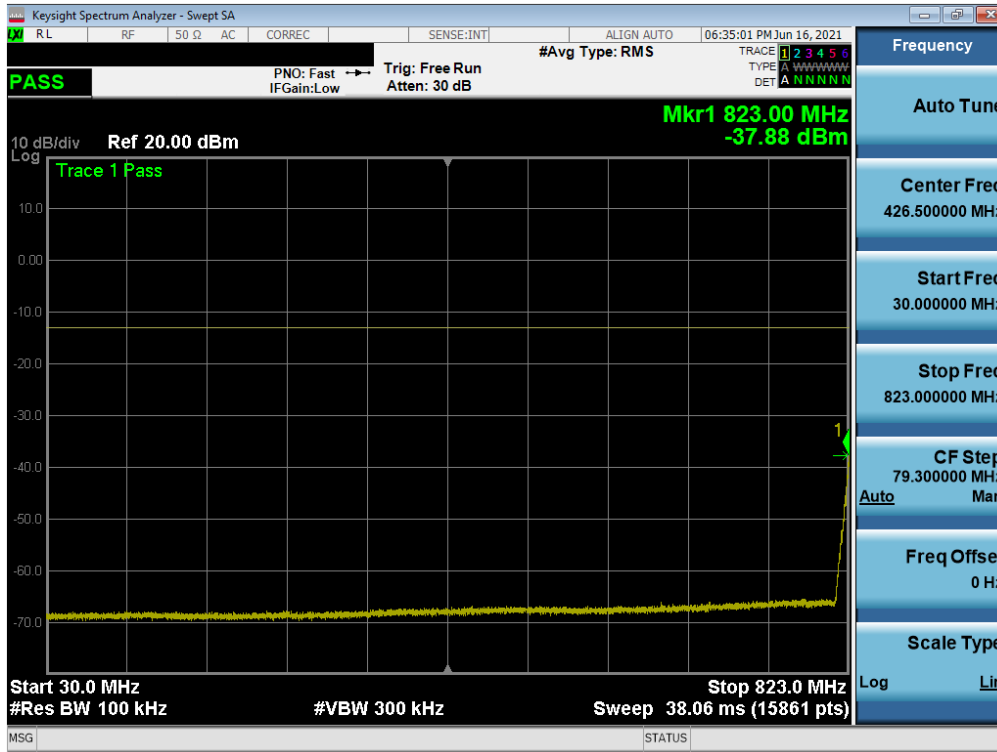

Plot 7-30. Conducted Spurious Plot (WCDMA Ch. 4132)

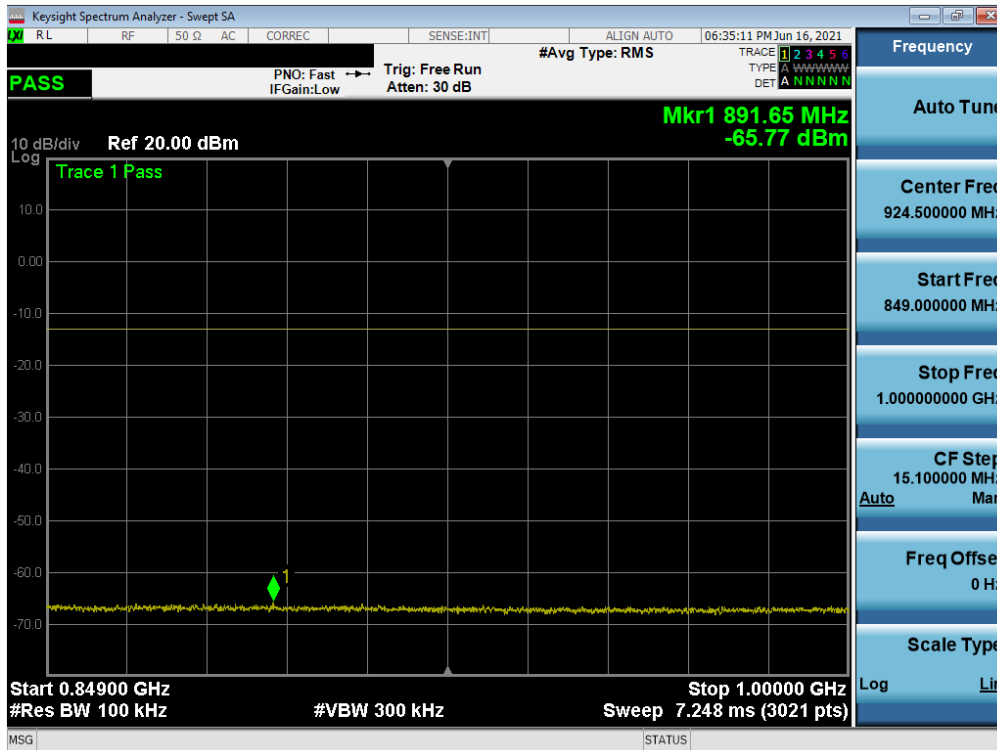


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 30 of 58




Plot 7-32. Conducted Spurious Plot (WCDMA Ch. 4132)

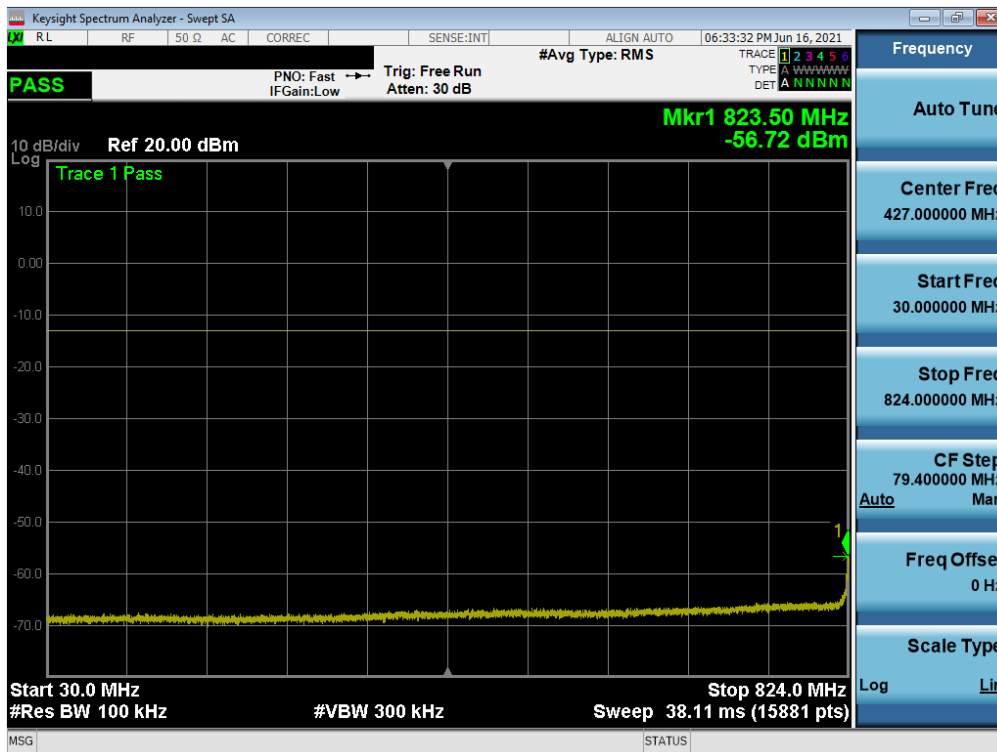


Plot 7-33. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 31 of 58

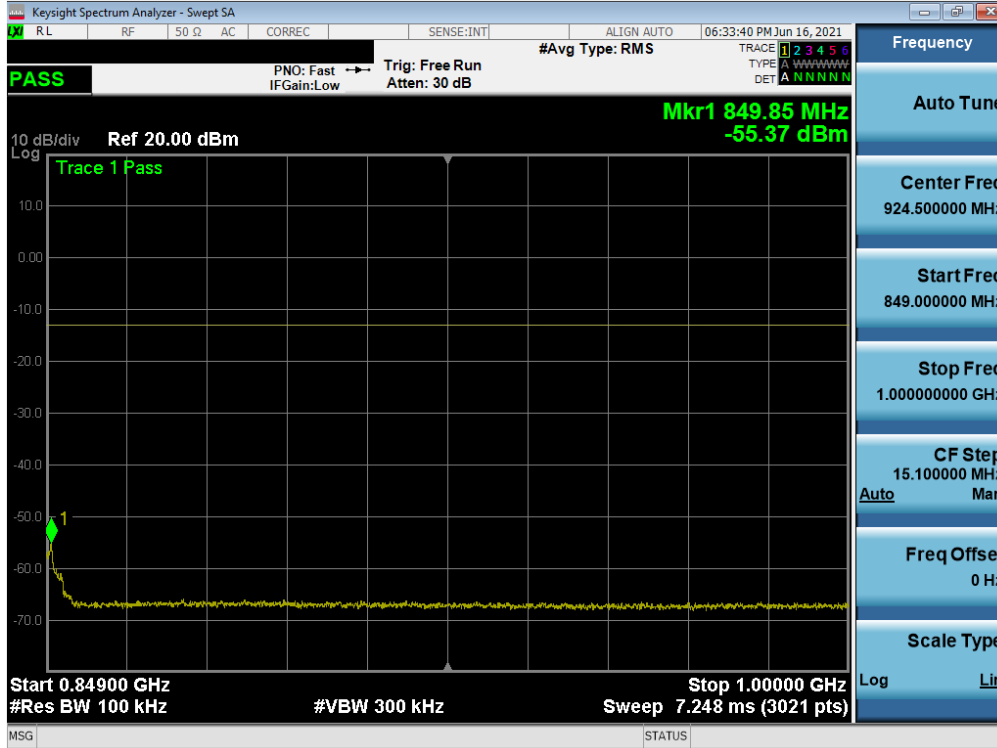


Plot 7-34. Conducted Spurious Plot (WCDMA Ch. 4183)

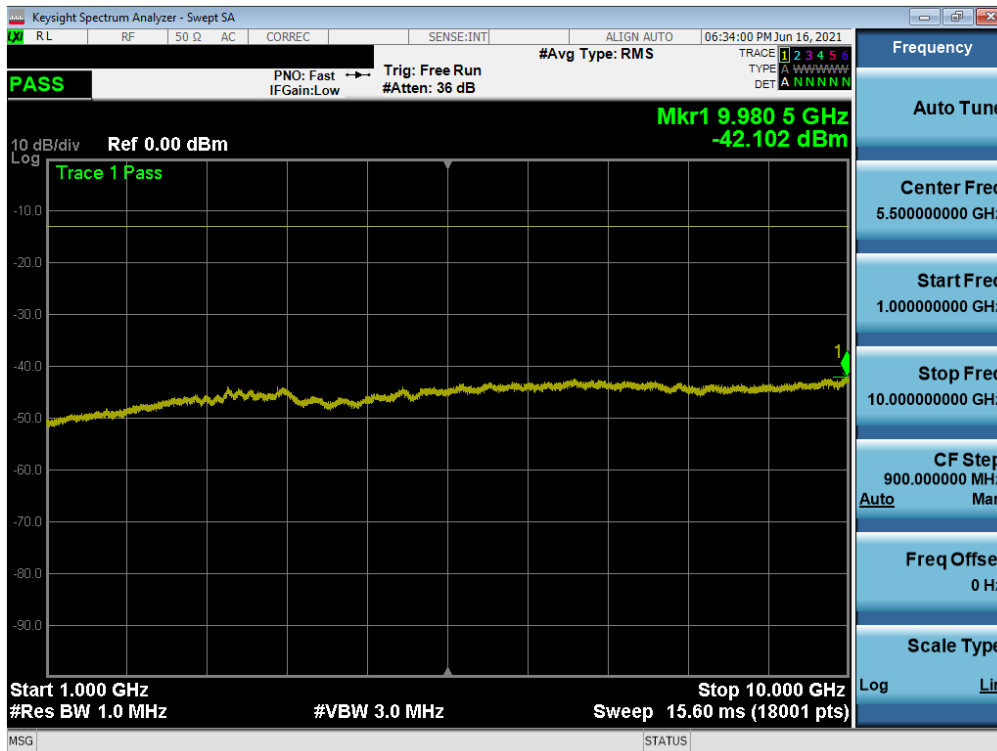


Plot 7-35. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 32 of 58

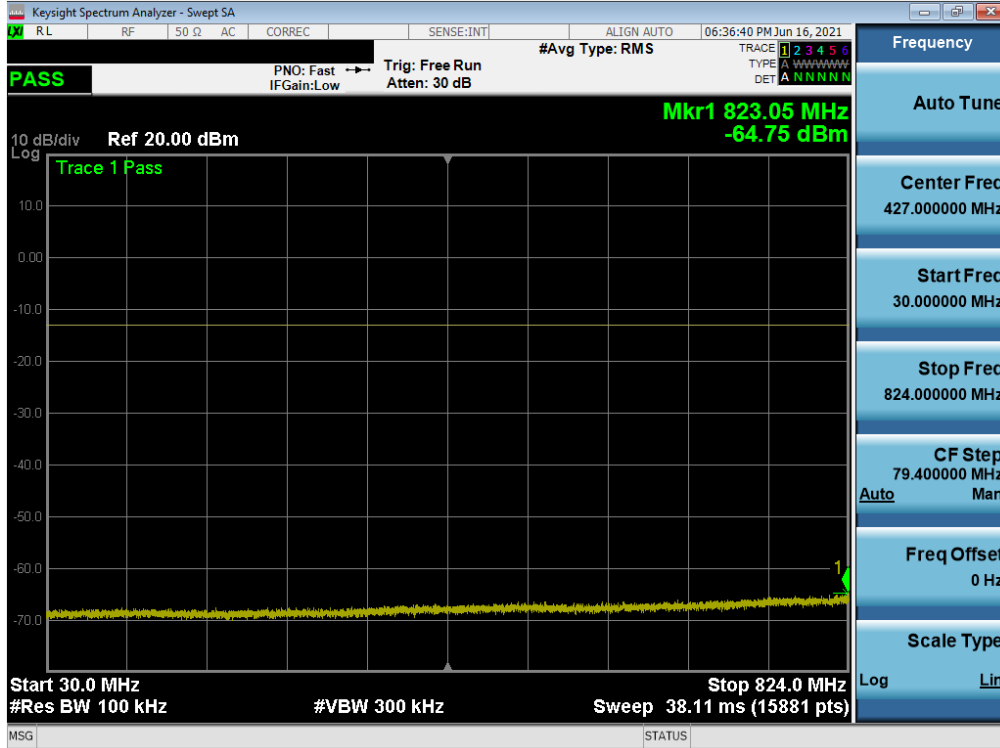


Plot 7-36. Conducted Spurious Plot (WCDMA Ch. 4233)

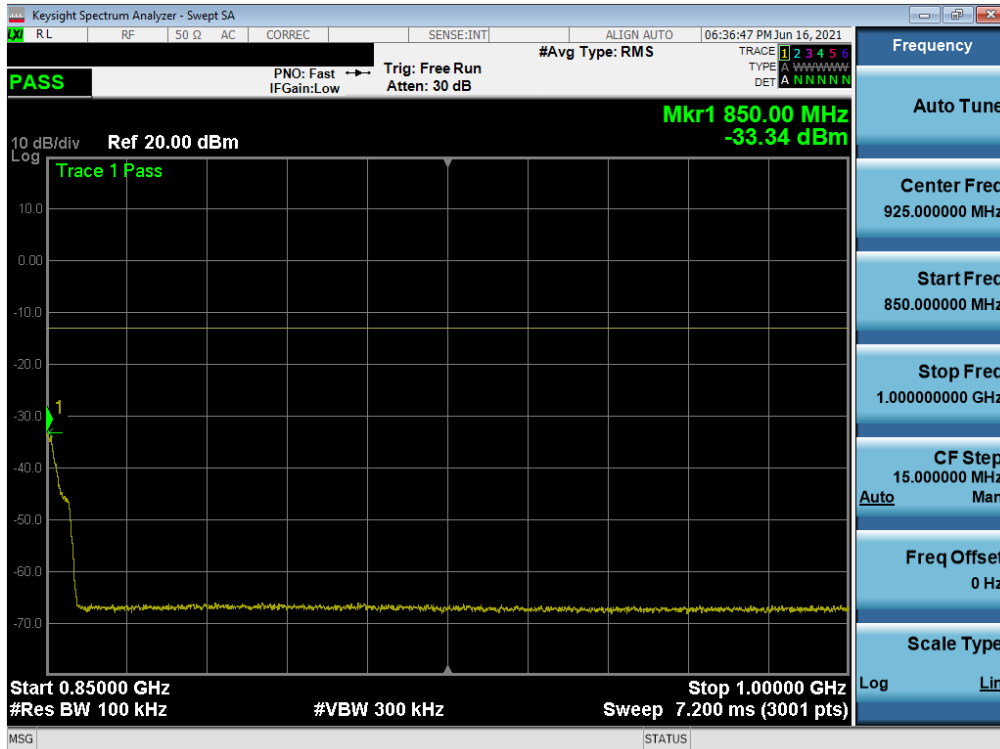




Plot 7-37. Conducted Spurious Plot (WCDMA Ch. 4233)

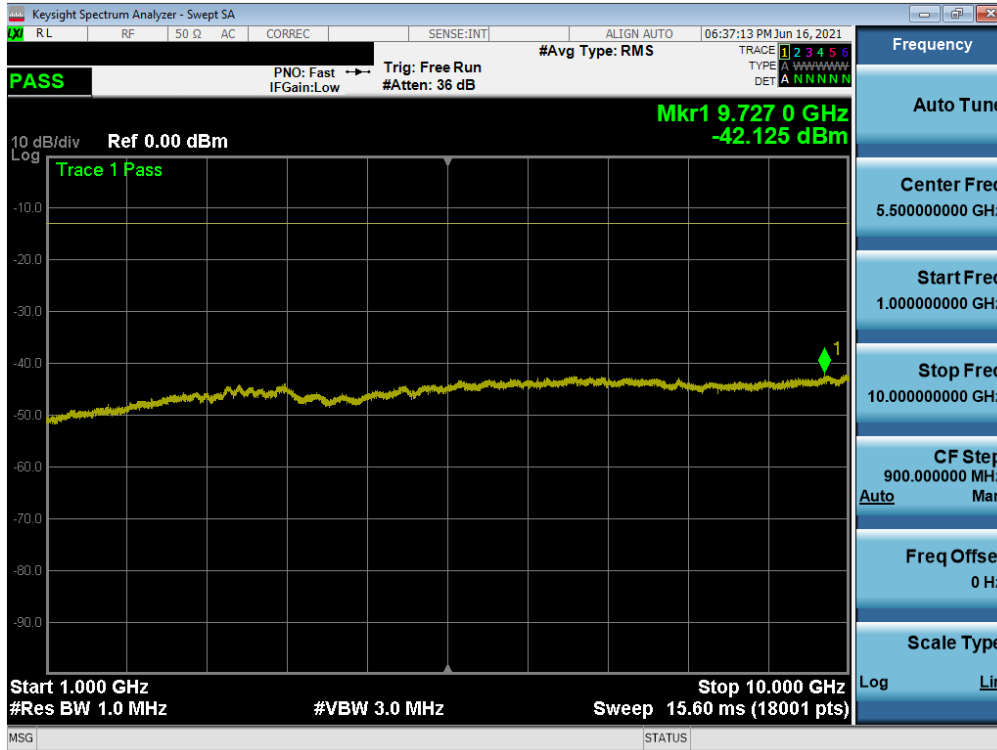FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 33 of 58



Plot 7-38. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 34 of 58

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.







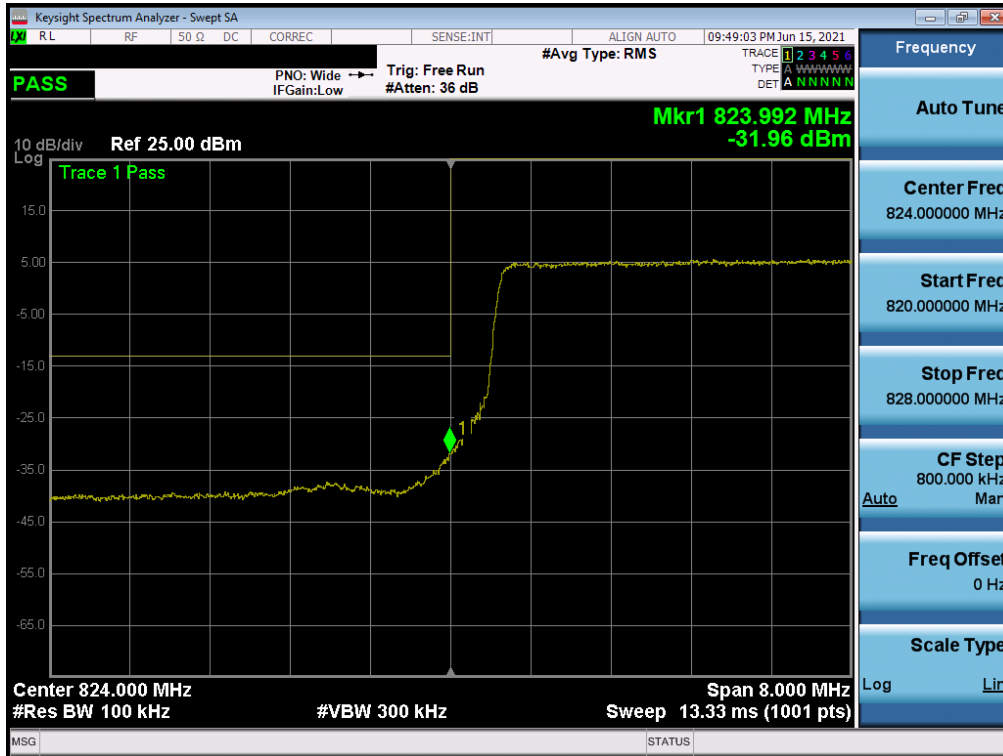
Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

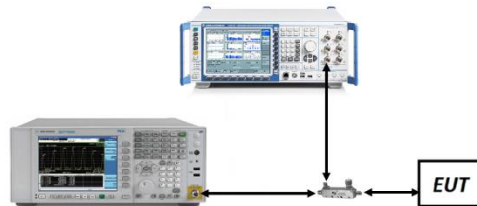FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 35 of 58

LTE Band 5




Plot 7-39. Lower Band Edge Plot (LTE Band 5 - 10MHz QPSK – Full RB)




Plot 7-40. Upper Band Edge Plot (LTE Band 5 - 10MHz QPSK – Full RB)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 36 of 58

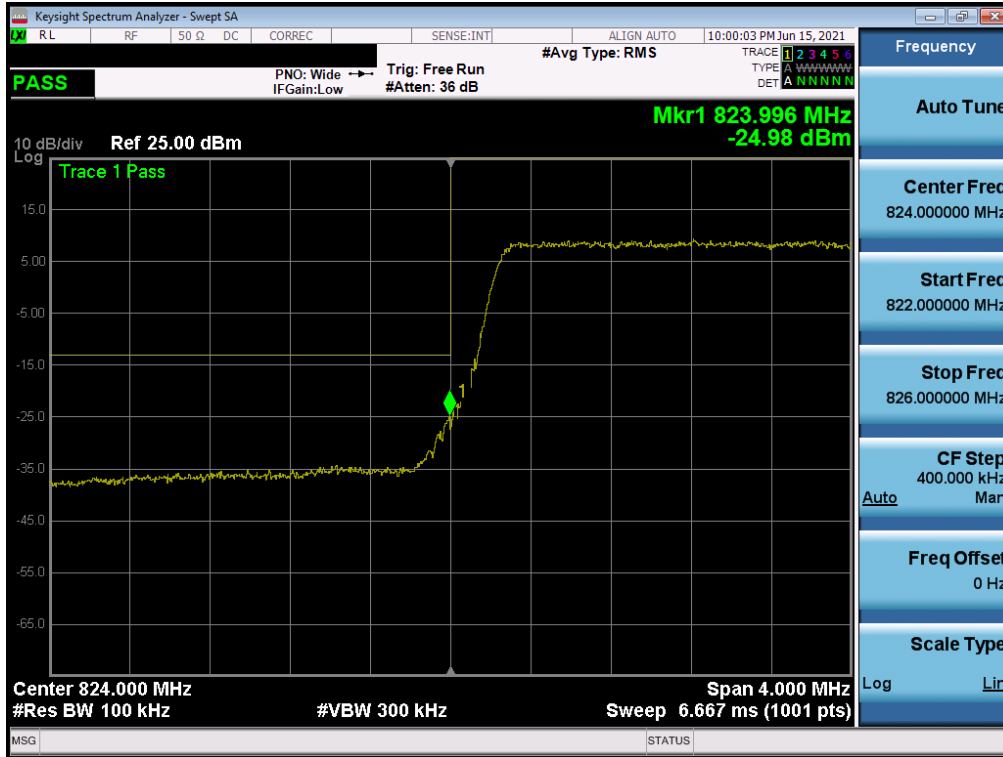


Plot 7-41. Lower Band Edge Plot (LTE Band 5 - 5MHz QPSK – Full RB)

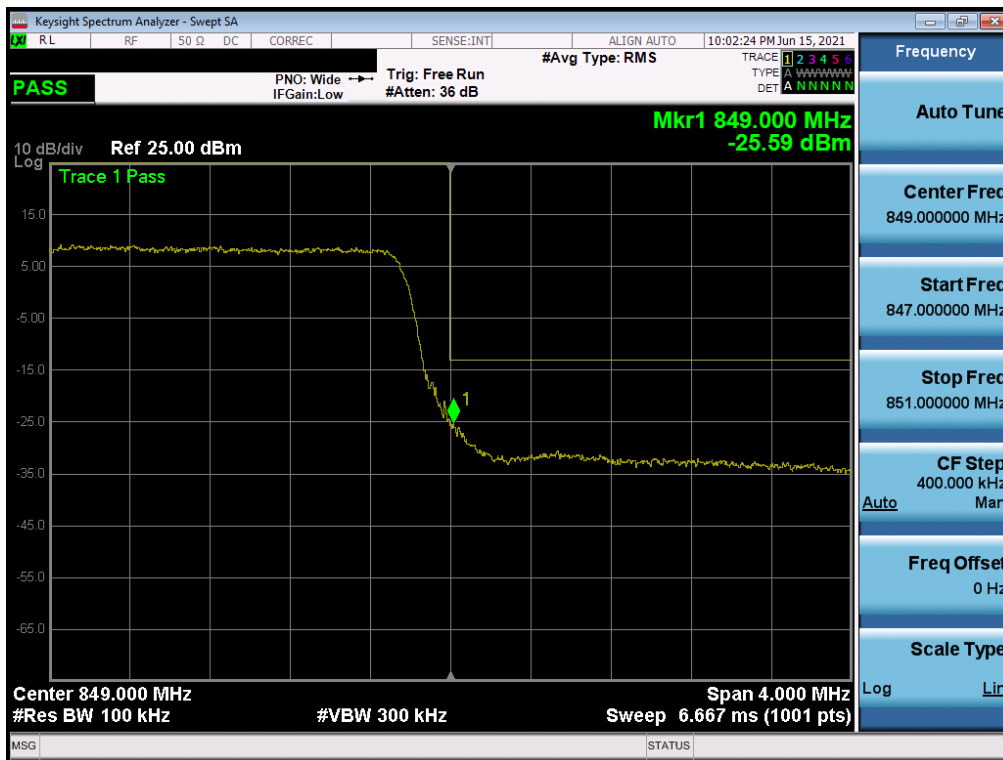

Plot 7-42. Upper Band Edge Plot (LTE Band 5 - 5MHz QPSK – Full RB)

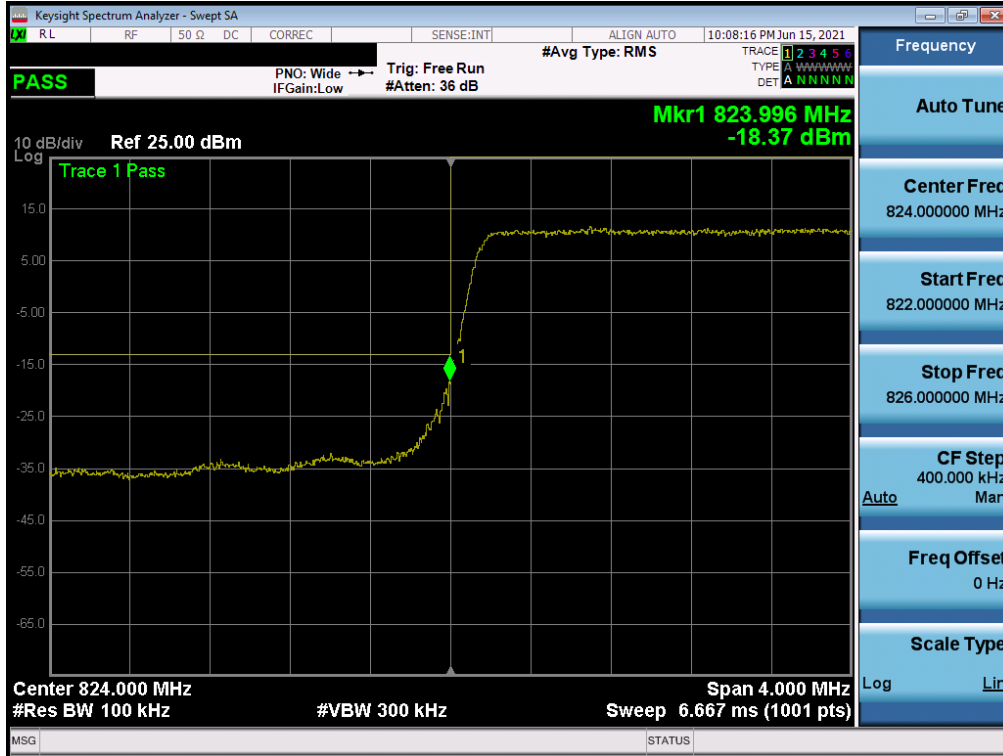

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 37 of 58




Plot 7-43. Lower Band Edge Plot (LTE Band 5 - 3MHz QPSK – Full RB)



Plot 7-44. Upper Band Edge Plot (LTE Band 5 - 3MHz QPSK – Full RB)

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 38 of 58

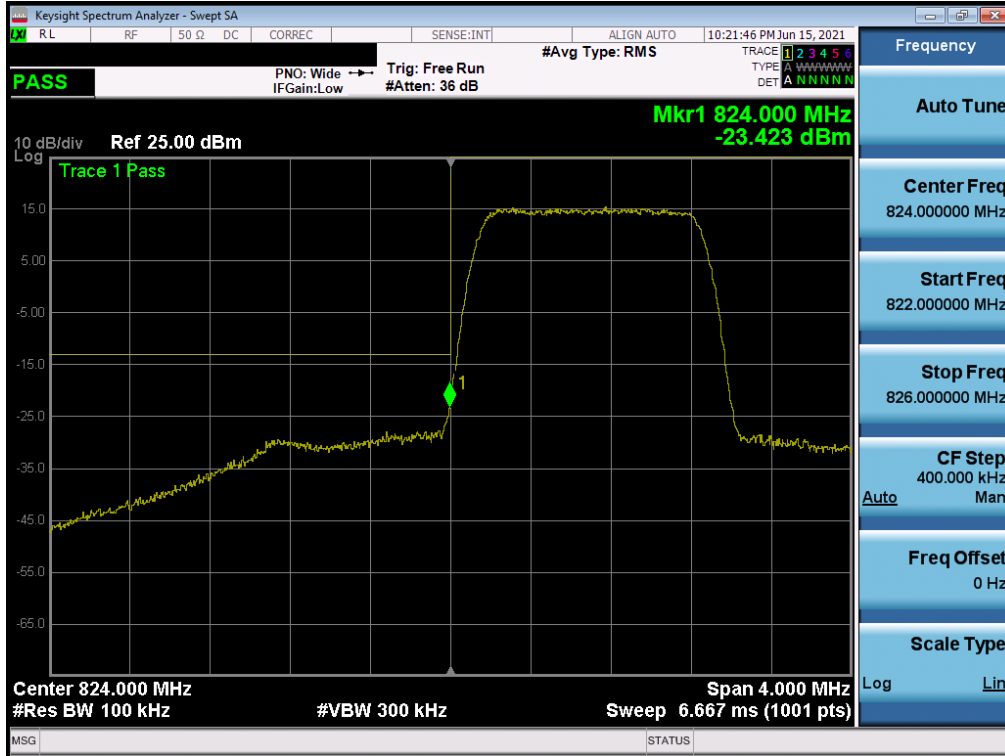


Plot 7-45. Lower Band Edge Plot (LTE Band 5 – 1.4MHz QPSK – Full RB)




Plot 7-46. Upper Band Edge Plot (LTE Band 5 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 39 of 58

GSM/GPRS Cell

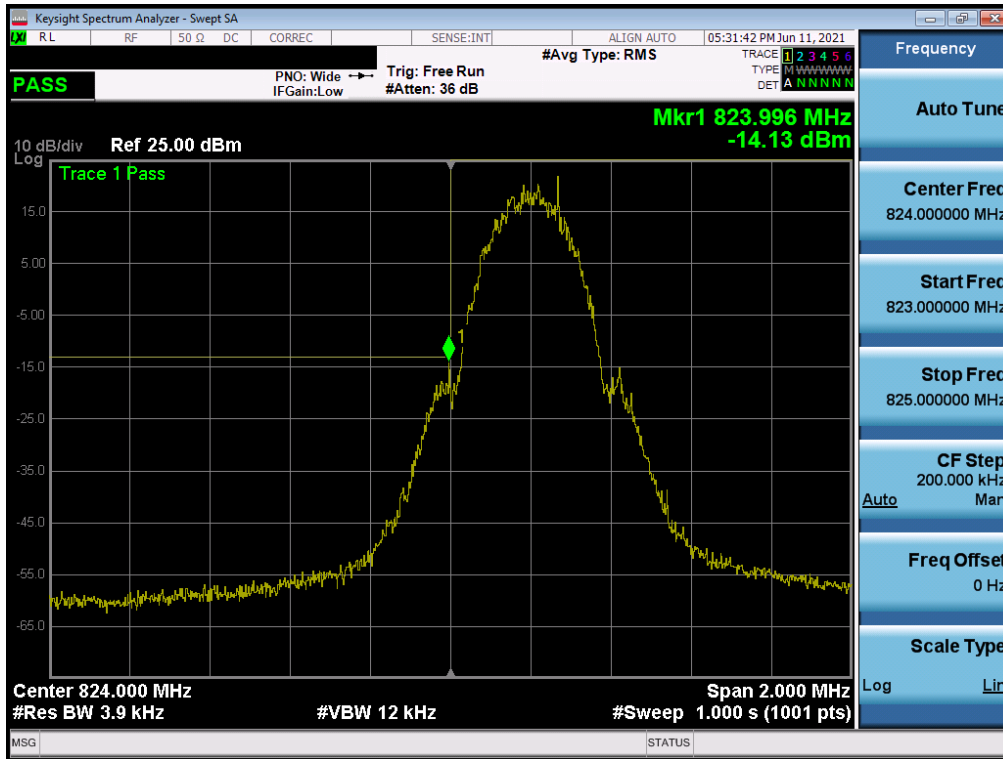


Plot 7-47. Lower Band Edge Plot (GSM Cell – Ch. 128)

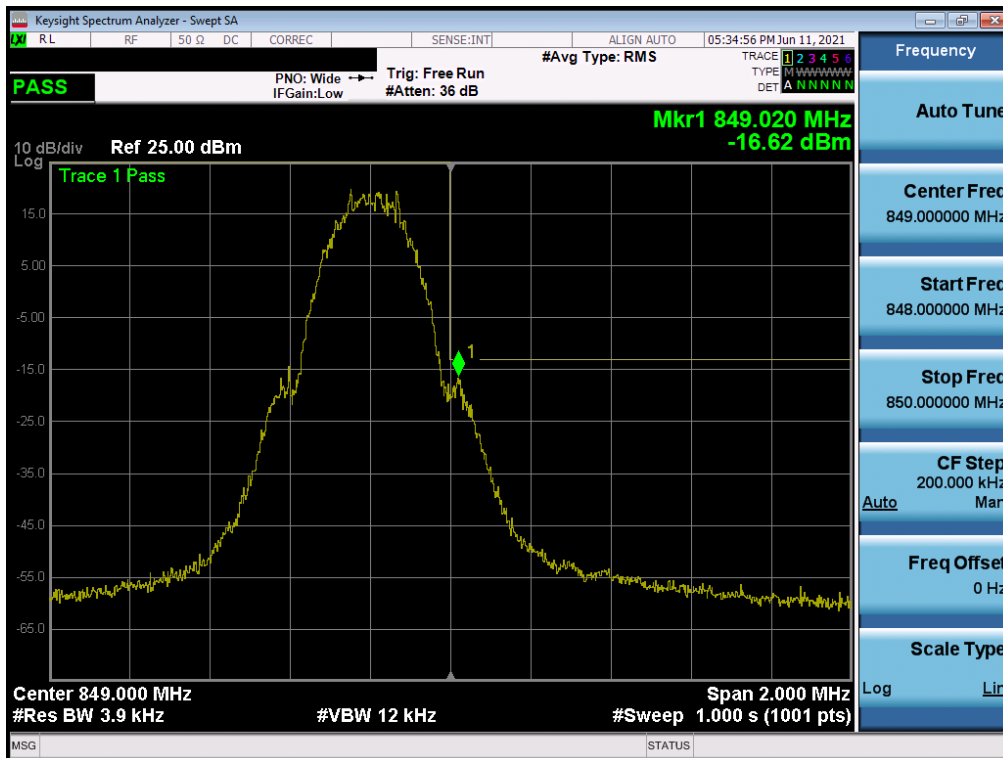

Plot 7-48. Upper Band Edge Plot (GSM Cell – Ch. 251)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 40 of 58

WCDMA Cell

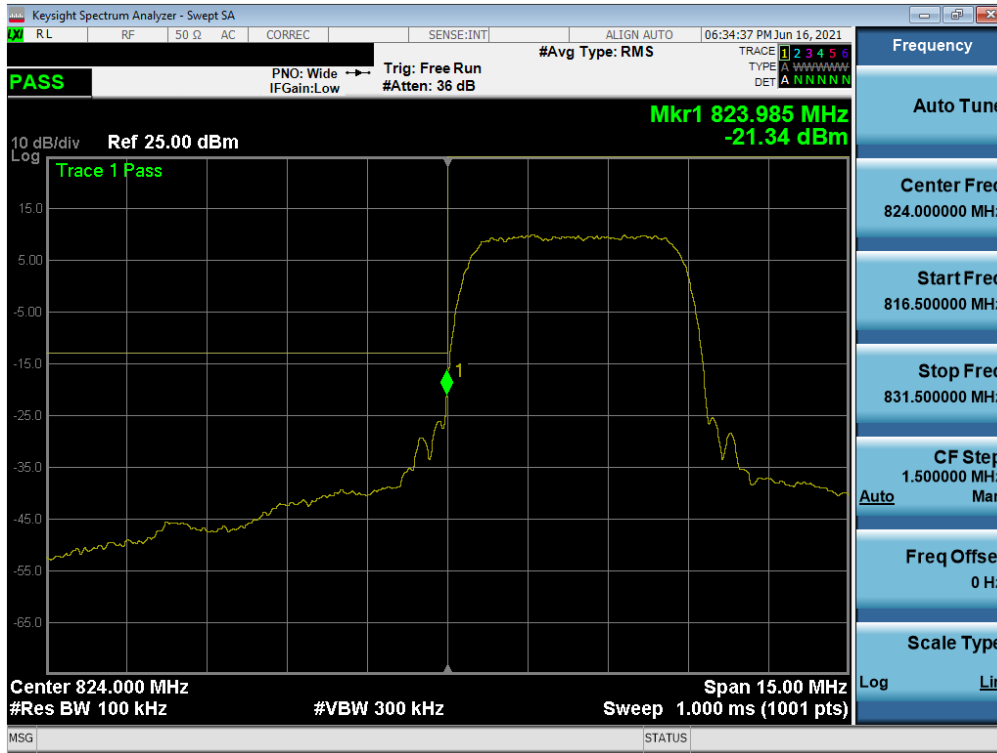

Plot 7-49. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)



Plot 7-50. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 41 of 58

7.5 Radiated Power (ERP)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF711JPN		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 42 of 58	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

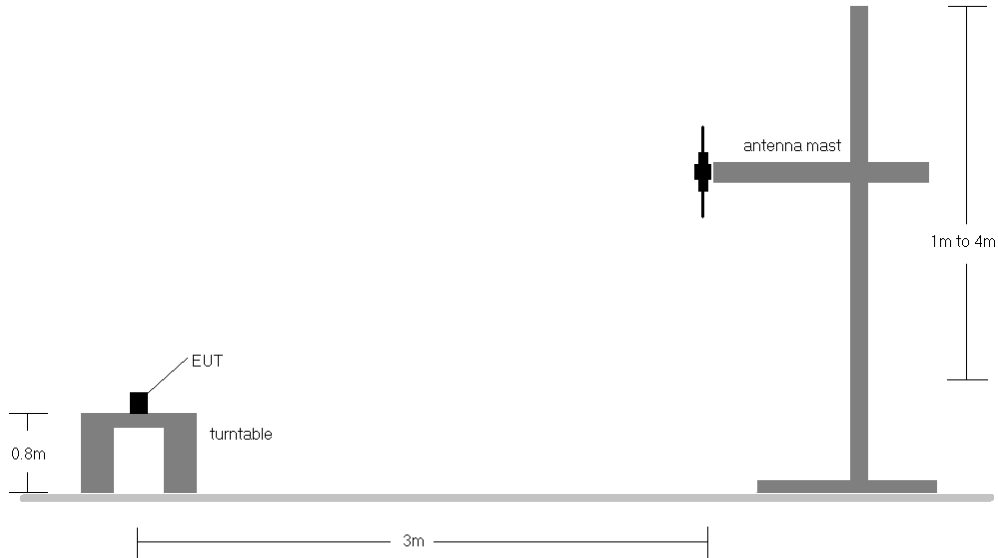


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 43 of 58	

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]	
10 MHz	QPSK	829.0	V	142	250	6.10	1 / 49	13.88	17.83	0.061	38.45	-20.62	19.98	0.100	40.61	-20.63	
		836.5	V	134	240	6.18	1 / 49	14.11	18.14	0.065	38.45	-20.31	20.29	0.107	40.61	-20.32	
		844.0	V	132	241	6.36	1 / 25	14.08	18.29	0.067	38.45	-20.16	20.44	0.111	40.61	-20.17	
5 MHz	16-QAM	844.0	V	132	241	6.36	1 / 25	13.25	17.46	0.056	38.45	-20.99	19.61	0.091	40.61	-21.00	
		829.0	V	142	250	6.10	1 / 12	13.95	17.90	0.062	38.45	-20.56	20.05	0.101	40.61	-20.56	
		836.5	V	134	240	6.18	1 / 12	14.13	18.16	0.065	38.45	-20.29	20.31	0.107	40.61	-20.30	
3 MHz	QPSK	844.0	V	132	241	6.36	1 / 12	14.00	18.21	0.066	38.45	-20.24	20.36	0.109	40.61	-20.25	
		836.5	V	134	240	6.18	1 / 12	13.32	17.34	0.054	38.45	-21.14	19.49	0.089	40.61	-21.11	
		829.0	V	142	250	6.10	1 / 14	13.87	17.82	0.061	38.45	-20.63	19.97	0.099	40.61	-20.63	
1.4 MHz	QPSK	836.5	V	134	240	6.18	1 / 7	13.87	17.90	0.062	38.45	-20.55	20.05	0.101	40.61	-20.55	
		844.0	V	132	241	6.36	1 / 7	14.07	18.27	0.067	38.45	-20.18	20.42	0.110	40.61	-20.18	
		836.5	V	134	240	6.18	1 / 7	13.28	17.31	0.054	38.45	-21.14	19.46	0.088	40.61	-21.15	
10 MHz	16-QAM	829.0	V	142	250	6.10	1 / 3	13.82	17.77	0.060	38.45	-20.68	19.92	0.098	40.61	-20.68	
		836.5	V	134	240	6.18	1 / 5	13.93	17.96	0.062	38.45	-20.50	20.11	0.102	40.61	-20.50	
		844.0	V	132	241	6.36	1 / 3	13.95	18.16	0.065	38.45	-20.29	20.31	0.107	40.61	-20.30	
10 MHz	QPSK (Opposite Pol.)	844.0	V	132	241	6.36	1 / 3	13.08	17.28	0.054	38.45	-21.17	19.43	0.088	40.61	-21.17	
		QPSK (Opposite Pol. (HALF))	844.0	H	189	169	6.76	1 / 0	12.88	17.49	0.056	38.45	-20.96	19.64	0.092	40.61	-20.97
		QPSK (WCP)	844.0	H	189	222	6.76	1 / 0	13.58	18.19	0.066	38.45	-20.26	20.34	0.108	40.61	-20.27
		844.0	V	184	232	6.36	1 / 49	8.44	12.65	0.018	38.45	-25.80	14.80	0.030	40.61	-25.81	



Table 7-2. ERP Data (LTE Band 5-Open)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	134	257	20.69	6.13	24.67	0.293	38.45	-13.78
836.60	GPRS850	V	130	258	21.29	6.18	25.32	0.340	38.45	-13.13
848.80	GPRS850	V	134	251	21.45	6.41	25.71	0.372	38.45	-12.75
848.80	GPRS850	H	180	165	18.79	6.73	23.37	0.217	38.45	-15.09
848.80	EDGE850	V	134	251	15.51	6.41	19.77	0.095	38.45	-18.69
848.80	GPRS850 (HALF)	H	312	261	19.49	6.73	24.07	0.255	38.45	-14.39
848.80	GPRS850 (WCP)	V	134	251	13.80	6.41	18.06	0.064	38.45	-20.40

Table 7-3. ERP Data (GPRS Cell-Open)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	370	58	13.21	6.67	17.73	0.059	38.45	-20.72
836.60	WCDMA850	H	372	58	13.25	6.74	17.84	0.061	38.45	-20.61
846.60	WCDMA850	H	370	67	12.24	6.78	16.87	0.049	38.45	-21.58
836.60	WCDMA850	V	158	337	12.31	6.18	16.34	0.043	38.45	-22.11
836.60	WCDMA850 (OPEN)	H	198	301	13.04	6.74	17.63	0.058	38.45	-20.82
836.60	WCDMA850 (WCP)	H	372	58	11.84	6.74	16.43	0.044	38.45	-22.02

Table 7-4. ERP Data (WCDMA Cell-Half-Open)

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 44 of 58

7.6 Radiated Spurious Emissions Measurements

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 45 of 58

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

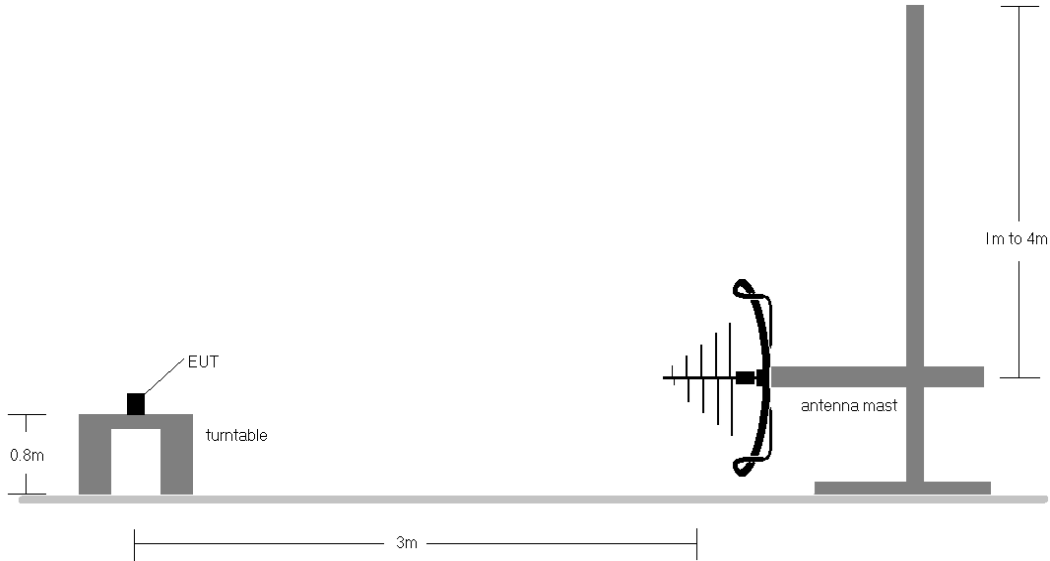


Figure 7-5. Test Instrument & Measurement Setup < 1GHz

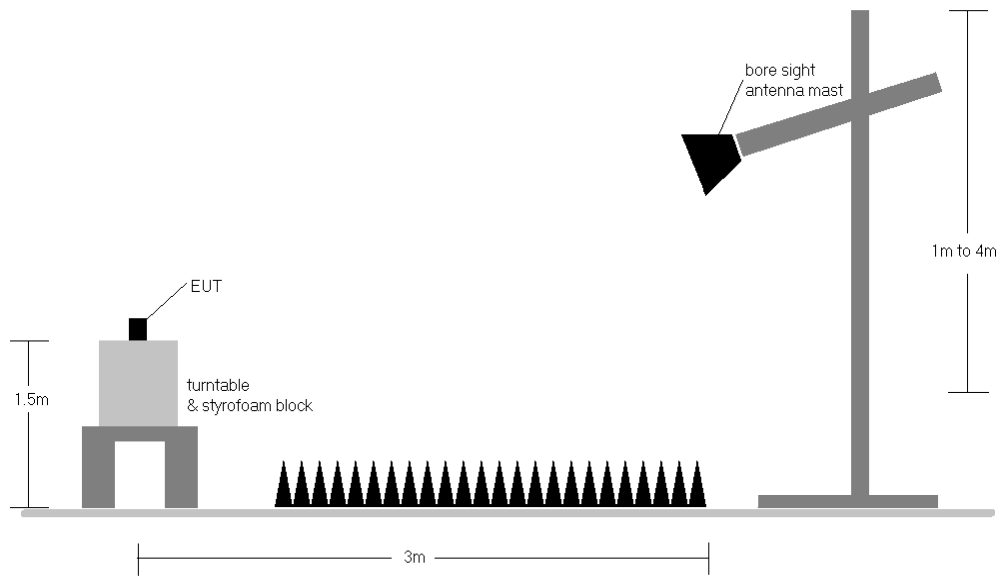




Figure 7-6. Test Instrument & Measurement Setup >1 GHz


<p>FCC ID: A3LSMF711JPN</p>	<p>PCTEST Proud to be part of element</p>	<p>PART 22 MEASUREMENT REPORT</p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2106100066-02.A3L</p>	<p>Test Dates: 06/10/2021 - 07/16/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 46 of 58</p>

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 47 of 58

LTE Band 5

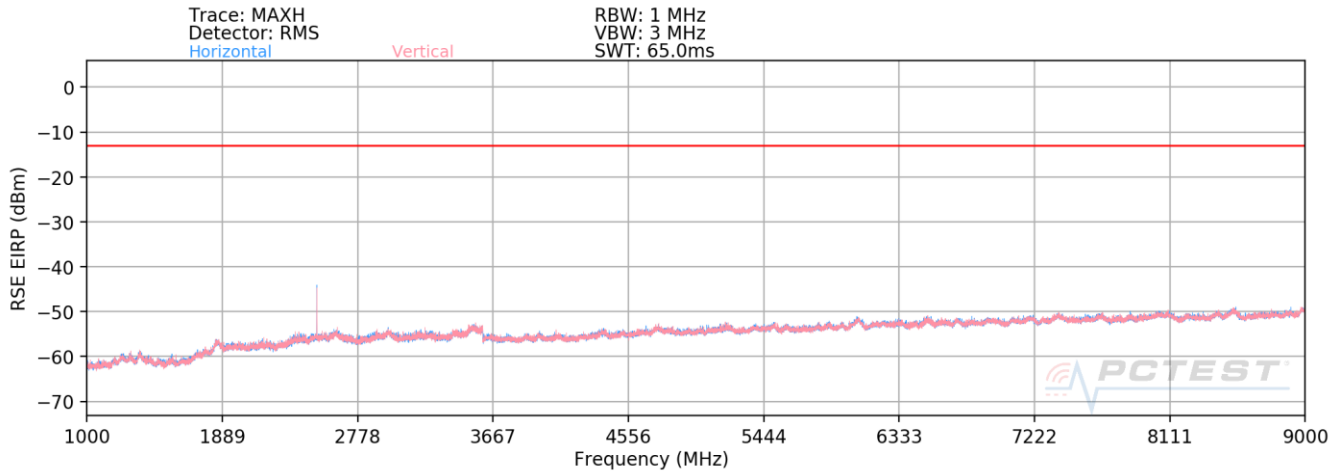

Plot 7-51. Radiated Spurious Plot (LTE Band 5-Half-Open)

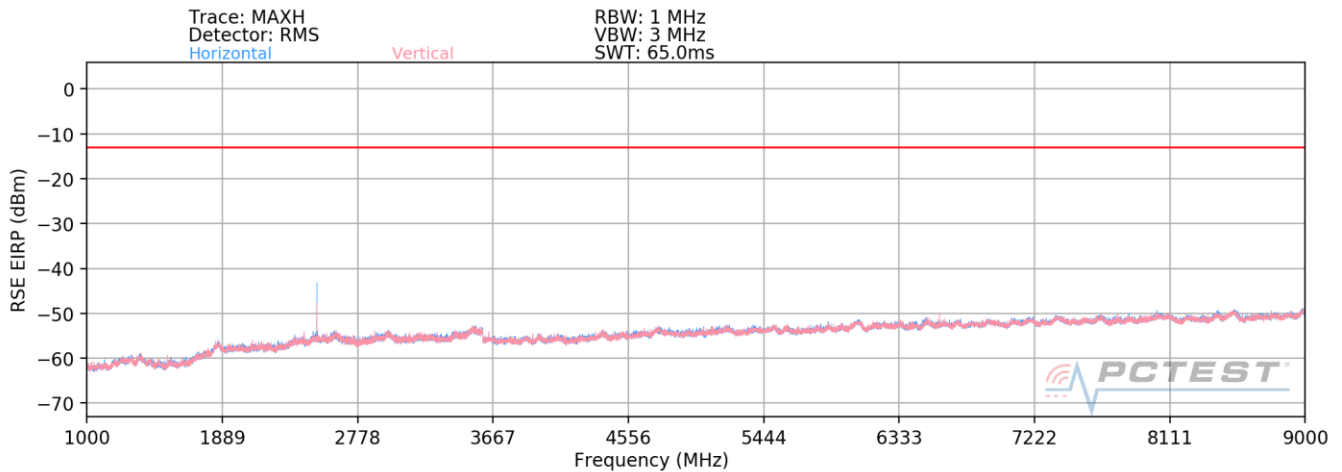



Plot 7-52. Radiated Spurious Plot (LTE Band 5 -Closed)

Bandwidth (MHz):	10
Frequency (MHz):	829.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1658.0	H	-	-	-76.79	-2.46	27.75	-67.51	-13.00	-54.51
2487.0	H	295	341	-71.26	2.06	37.80	-57.46	-13.00	-44.46
3316.0	H	-	-	-77.83	2.41	31.58	-63.68	-13.00	-50.68
4145.0	H	-	-	-78.19	3.12	31.93	-63.33	-13.00	-50.33
4974.0	H	-	-	-79.17	4.63	32.46	-62.79	-13.00	-49.79

Table 7-5. Radiated Spurious Data (LTE Band 5 – Low Channel – Half-Open)

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 48 of 58

Bandwidth (MHz):	10
Frequency (MHz):	836.5
RB / Offset:	1 / 25



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	H	-	-	-77.07	-2.27	27.66	-67.60	-13.00	-54.60
2509.5	H	164	172	-62.07	2.22	47.15	-48.11	-13.00	-35.11
3346.0	H	-	-	-77.68	2.42	31.74	-63.52	-13.00	-50.52
4182.5	H	-	-	-78.58	3.46	31.88	-63.37	-13.00	-50.37
5019.0	H	-	-	-79.51	5.31	32.80	-62.46	-13.00	-49.46

Table 7-6. Radiated Spurious Data (LTE Band 5 – Mid Channel -Half-Open)


Bandwidth (MHz):	10
Frequency (MHz):	844.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1688.00	H	-	-	-76.96	-1.95	28.09	-67.17	-13.00	-54.17
2532.00	H	123	175	-54.78	2.23	54.45	-40.81	-13.00	-27.81
3376.00	H	-	-	-77.86	2.28	31.42	-63.84	-13.00	-50.84
4220.00	H	-	-	-77.25	3.17	32.92	-62.34	-13.00	-49.34
5064.00	H	-	-	-79.70	5.12	32.42	-62.83	-13.00	-49.83


Table 7-7. Radiated Spurious Data (LTE Band 5 – High Channel - Half-Open)

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 49 of 58

GSM/GPRS Cell

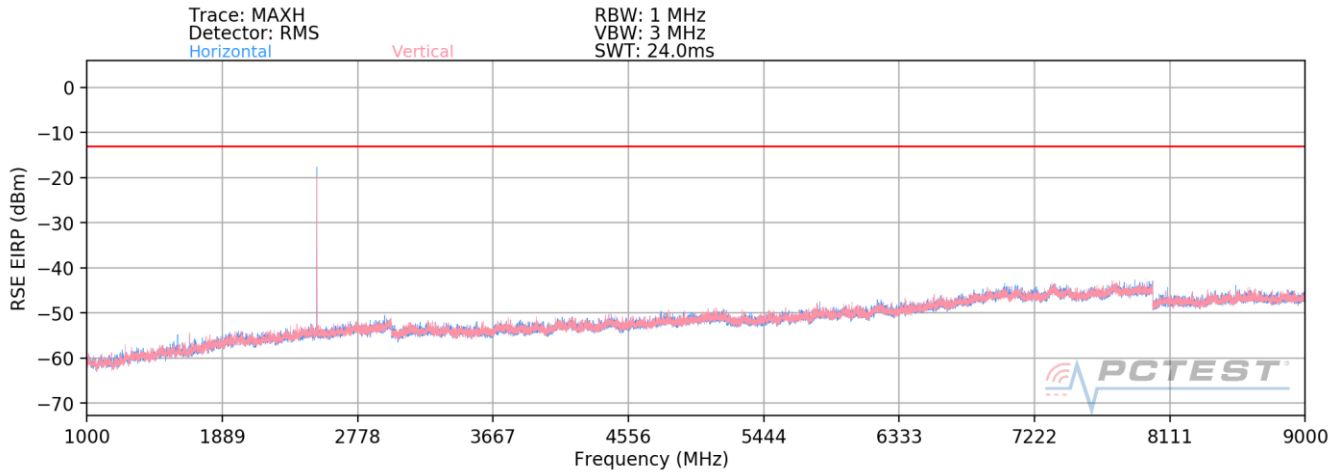

Plot 7-53. Radiated Spurious Plot (GPRS Cell -WCP-Closed)

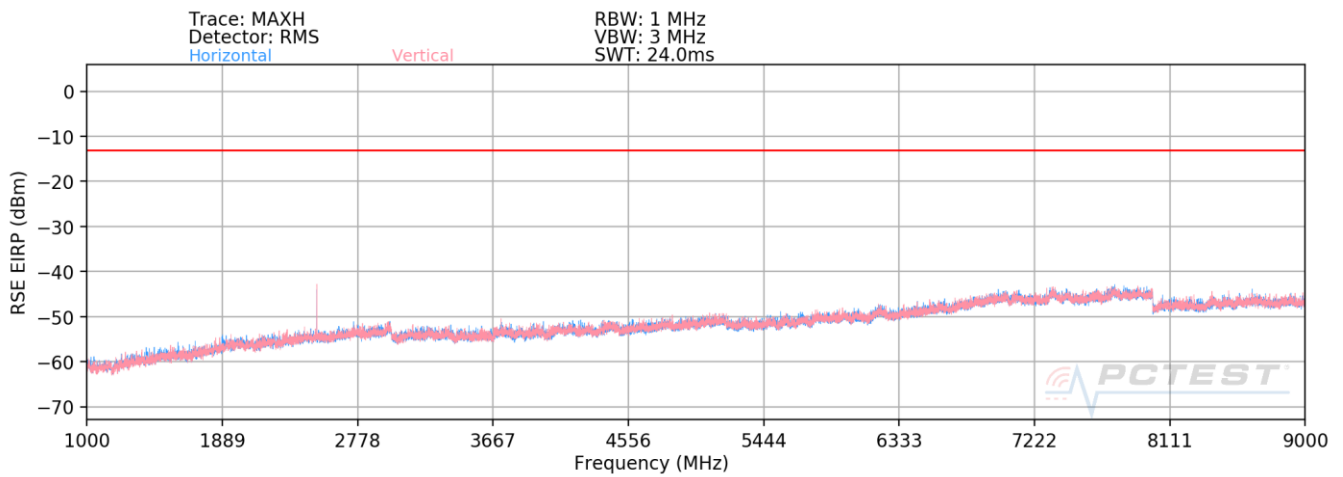

Plot 7-54. Radiated Spurious Plot (GPRS Cell -WCP-Open)

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	H	265	55	-67.76	-0.37	38.87	-56.39	-13.00	-43.39
2472.6	H	115	169	-31.87	3.85	78.98	-16.28	-13.00	-3.28
3296.8	H	-	-	-78.51	4.65	33.14	-62.12	-13.00	-49.12
4121.0	H	-	-	-77.76	6.02	35.26	-60.00	-13.00	-47.00
4945.2	H	-	-	-79.72	7.06	34.34	-60.92	-13.00	-47.92

Table 7-8. Radiated Spurious Data (GPRS Cell – Low Channel -WCP-Closed)

FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 50 of 58

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	H	188	161	-69.98	-0.14	36.88	-58.38	-13.00	-45.38
2509.8	H	373	195	-37.46	4.03	73.57	-21.69	-13.00	-8.69
3346.4	H	-	-	-79.11	5.02	32.91	-62.35	-13.00	-49.35
4183.0	H	-	-	-79.33	6.09	33.76	-61.50	-13.00	-48.50
5019.6	H	-	-	-79.41	6.47	34.06	-61.20	-13.00	-48.20

Table 7-9. Radiated Spurious Data (GPRS Cell – Mid Channel -WCP-Closed))

Mode:	GPRS 1 Tx Slot
Channel:	251
Frequency (MHz):	848.8



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.6	H	335	314	-74.02	0.12	33.10	-62.16	-13.00	-49.16
2546.4	H	133	163	-42.25	3.44	68.19	-27.07	-13.00	-14.07
3395.2	H	-	-	-78.84	4.93	33.09	-62.17	-13.00	-49.17
4244.0	H	-	-	-79.01	5.42	33.41	-61.85	-13.00	-48.85
5092.8	H	-	-	-79.70	6.97	34.27	-60.99	-13.00	-47.99

Table 7-10. Radiated Spurious Data (GPRS Cell – High Channel – WCP-Closed)


Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	H	184	289	-63.64	1.50	44.86	-50.40	-13.00	-37.40
2472.6	H	109	176	-37.52	5.81	75.29	-19.97	-13.00	-6.97
3296.8	H	-	-	-71.27	7.74	43.47	-51.79	-13.00	-38.79
4121.0	H	-	-	-72.38	8.28	42.90	-52.36	-13.00	-39.36
4945.2	H	-	-	-72.76	9.50	43.74	-51.52	-13.00	-38.52


Table 7-11. Radiated Spurious Data (GPRS Cell – High Channel – w/o WCP-Closed)

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 51 of 58

WCDMA Cell

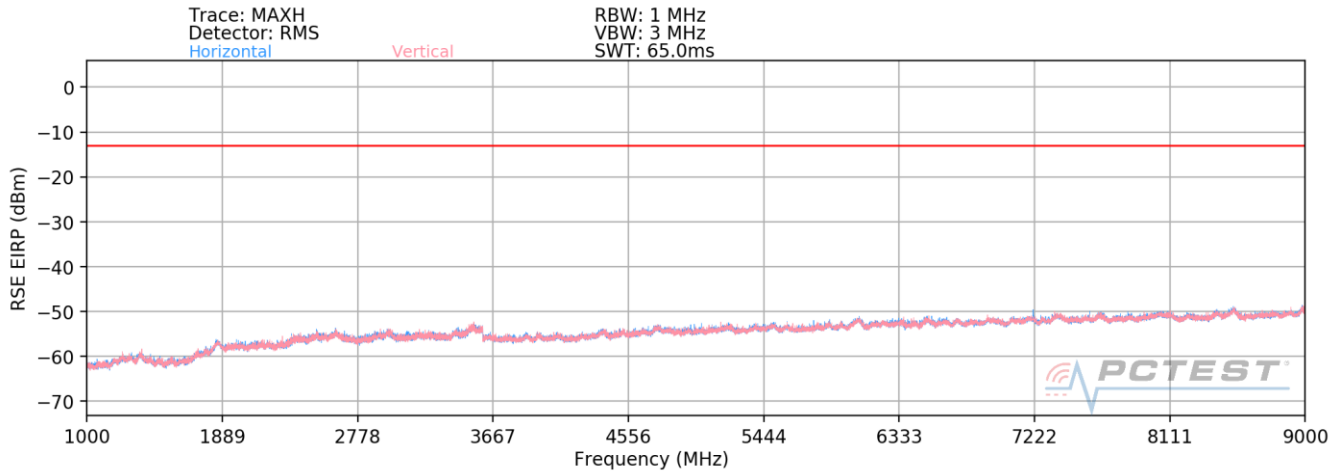

Plot 7-55. Radiated Spurious Plot (WCDMA Cell -Closed)

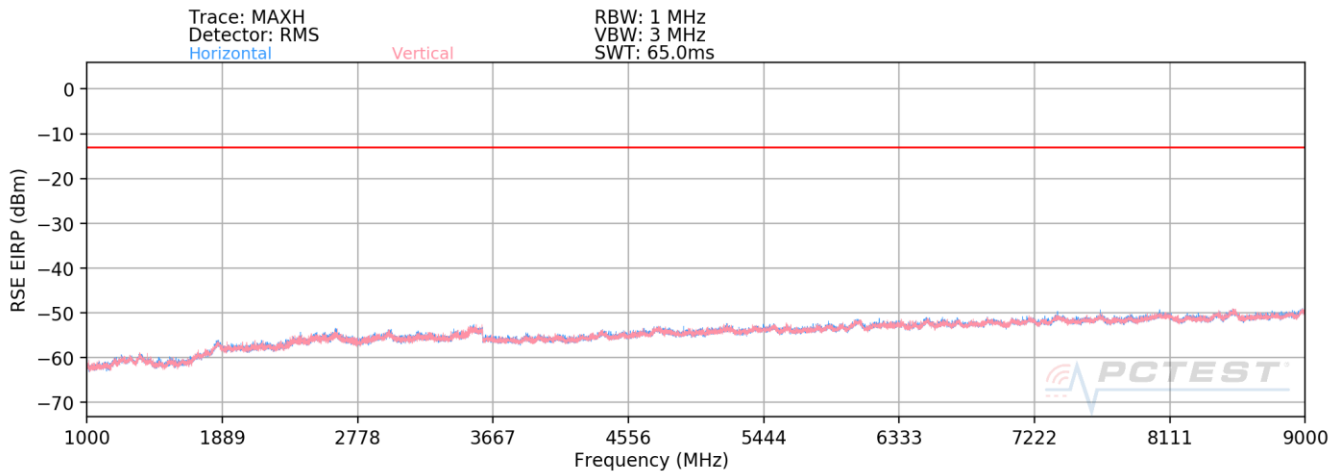

Plot 7-56. Radiated Spurious Plot (WCDMA Cell -Open)

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.8	H	203	327	-75.80	-2.52	28.68	-66.58	-13.00	-53.58
2479.2	H	122	188	-51.91	2.03	57.12	-38.14	-13.00	-25.14
3305.6	H	-	-	-78.11	2.42	31.31	-63.95	-13.00	-50.95
4132.0	H	-	-	-78.21	3.25	32.04	-63.22	-13.00	-50.22
4958.4	H	-	-	-79.32	4.97	32.65	-62.61	-13.00	-49.61

Table 7-12. Radiated Spurious Data (WCDMA Cell – Low Channel -Closed)

FCC ID: A3LSMF711JPN	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset
		Page 52 of 58

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	H	-	-	-76.89	-2.27	27.84	-67.41	-13.00	-54.41
2509.8	H	117	172	-76.89	2.22	32.33	-62.92	-13.00	-49.92
3346.4	H	-	-	-77.66	2.42	31.76	-63.50	-13.00	-50.50
4183.0	H	-	-	-78.80	3.46	31.66	-63.60	-13.00	-50.60
5019.6	H	-	-	-79.61	5.32	32.71	-62.55	-13.00	-49.55

Table 7-13. Radiated Spurious Data (WCDMA Cell – Mid Channel -Closed)

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.2	H	-	-	-77.04	-1.82	28.14	-67.11	-13.00	-54.11
2539.8	H	166	172	-69.40	2.33	39.93	-55.33	-13.00	-42.33
3386.4	H	-	-	-77.88	2.32	31.44	-63.81	-13.00	-50.81
4233.0	H	-	-	-78.07	3.38	32.31	-62.95	-13.00	-49.95
5079.6	H	-	-	-79.63	5.51	32.88	-62.38	-13.00	-49.38

Table 7-14. Radiated Spurious Data (WCDMA Cell – High Channel -Closed)

FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 53 of 58

7.7 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


Test Notes

None



FCC ID: A3LSMF711JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset		Page 54 of 58

LTE Band 5					
Operating Frequency (Hz):		836,500,000			
Ref. Voltage (VDC):		4.31			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	832,003,208	832	0.0001000
		- 20	832,001,169	-1,207	-0.0001451
		- 10	832,001,685	-692	-0.0000831
		0	832,002,045	-332	-0.0000398
		+ 10	832,002,416	40	0.0000048
		+ 20 (Ref)	832,002,376	0	0.0000000
		+ 30	832,000,348	-2,028	-0.0002438
		+ 40	832,002,039	-338	-0.0000406
Battery Endpoint	3.60	+ 20	832,002,547	171	0.0000205

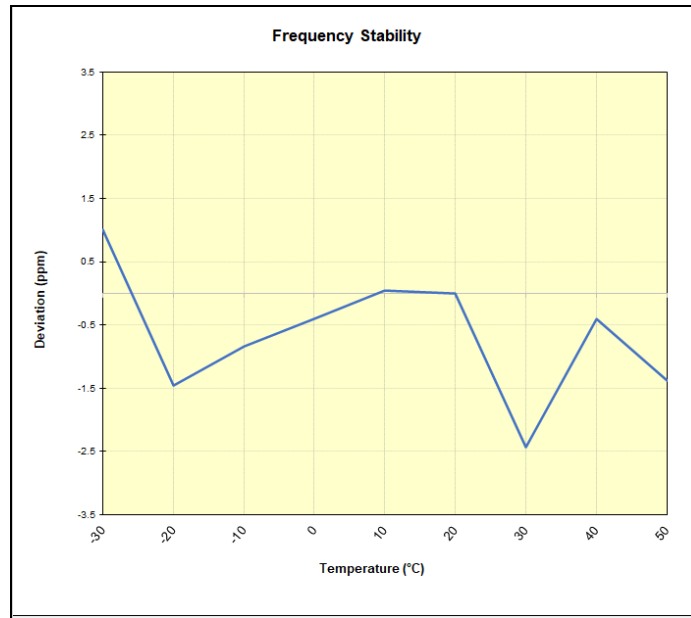Table 7-15. LTE Band 5 Frequency Stability Data




Plot 7-57. LTE Band 5 Frequency Stability Chart

FCC ID: A3LSMF711JPN	 PCTEST <small>Proud to be part of element</small>	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 55 of 58	

GSM/GPRS Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.31			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,601,848	137	0.0000163
		- 20	836,603,142	1,430	0.0001710
		- 10	836,600,115	-1,597	-0.0001909
		0	836,600,101	-1,611	-0.0001926
		+ 10	836,603,333	1,622	0.0001938
		+ 20 (Ref)	836,601,712	0	0.0000000
		+ 30	836,600,151	-1,561	-0.0001866
		+ 40	836,600,485	-1,227	-0.0001466
Battery Endpoint	3.60	+ 20	836,601,647	-65	-0.0000078

Table 7-16. GSM/GPRS Cell Frequency Stability Data

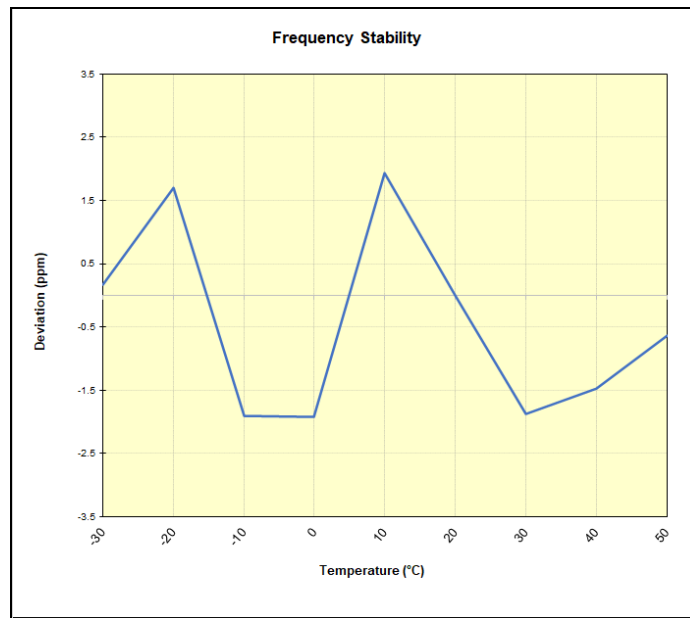


Plot 7-58. GSM/GPRS Cell Frequency Stability Chart



FCC ID: A3LSMF711JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 56 of 58

WCDMA Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.31			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,584,072	837	0.0001000
		- 20	836,584,204	969	0.0001158
		- 10	836,583,616	381	0.0000455
		0	836,581,745	-1,491	-0.0001782
		+ 10	836,584,369	1,134	0.0001355
		+ 20 (Ref)	836,583,236	0	0.0000000
		+ 30	836,585,230	1,994	0.0002384
		+ 40	836,584,156	921	0.0001101
Battery Endpoint	3.60	+ 20	836,584,097	861	0.0001029

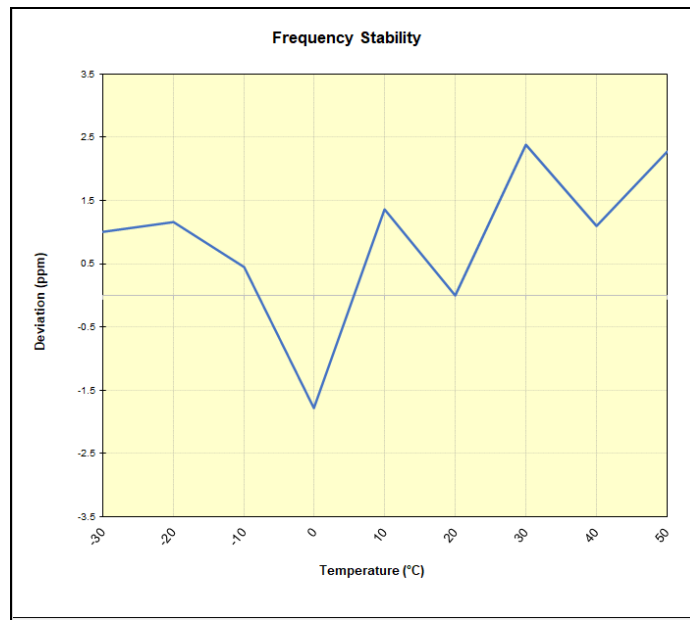Table 7-17. WCDMA Cell Frequency Stability Data





Plot 7-59. WCDMA Cell Frequency Stability Chart

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset
Page 57 of 58		

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMF711JPN** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: A3LSMF711JPN	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2106100066-02.A3L	Test Dates: 06/10/2021 - 07/16/2021	EUT Type: Portable Handset	Page 58 of 58