

**ELEMENT WASHINGTON DC LLC**

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>**MEASUREMENT REPORT
FCC PART 15.247 WLAN****Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

4/8/2022-7/30/2022

Test Report Issue Date:

7/30/2022

Test Site/Location:

Element Lab. Columbia, MD, USA

Test Report Serial No.:

1M2206140073-09-R1.A3L

FCC ID:**A3LSMF721JPN****APPLICANT:****Samsung Electronics Co., Ltd.****Application Type:**

Certification

Model:

SC-54C

Additional Model(s):

SCG17

EUT Type:

Portable Handset

Frequency Range:

2412 – 2472MHz

Modulation Type:

CCK/DSSS/OFDM

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2206140073-09-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 1 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	7
2.4	Antenna Description	7
2.5	Software and Firmware	7
2.6	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	13
7.1	Summary	13
7.2	6dB Bandwidth Measurement	14
7.3	Output Power Measurement.....	29
	Note:	31
7.4	Power Spectral Density	32
7.5	Conducted Emissions at the Band Edge	48
7.6	Conducted Spurious Emissions.....	65
7.7	Radiated Spurious Emission Measurements – Above 1 GHz.....	73
7.7.1	SISO Antenna-1 Radiated Spurious Emission Measurements	76
7.7.2	SISO Antenna-2 Radiated Spurious Emission Measurements	81
7.7.3	MIMO/CDD Radiated Spurious Emission Measurements.....	86
7.7.4	SISO Antenna-1 Radiated Restricted Band Edge Measurements	91
7.7.5	SISO Antenna-2 Radiated Restricted Band Edge Measurements	93
7.7.6	MIMO Radiated Restricted Band Edge Measurements	95
7.8	Radiated Spurious Emissions Measurements – Below 1GHz	98
7.9	Line-Conducted Test Data.....	102
8.0	CONCLUSION	106

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 2 of 106

V9.0 02/01/2019

MEASUREMENT REPORT

Mode	Tx Frequency (MHz)	ANT1				ANT2				MIMO			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2472	56.885	17.55	195.434	22.91	62.517	17.96	171.396	22.34	N/A			
802.11g	2412 - 2472	35.156	15.46	193.642	22.87	39.537	15.97	152.055	21.82	73.282	18.65	341.979	25.34
802.11n	2412 - 2472	38.815	15.89	271.019	24.33	38.637	15.87	230.144	23.62	74.989	18.75	500.035	26.99
802.11ax	2412 - 2472	38.815	15.89	185.353	22.68	38.994	15.91	158.855	22.01	75.336	18.77	340.408	25.32

EUT Overview

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 3 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 4 of 106

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF721JPN**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 0829M, 0963M, 0991M, 0903M, 0952M, 1219M, 1228M, 1373M, 1309M, 1356M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
2.4GHz	b	99.42	99.42	-
	g	96.42	96.42	96.39
	n	97.96	97.96	97.94
	ax	99.73	99.73	99.73

Table 2-2. Measured Duty Cycles

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 5 of 106

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ax	✓	✓	✓	✓	✓	✓

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	1Mbps	6Mbps
Mode	802.11b	802.11a

Table 2-4. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Configuration 2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	1Mbps	6Mbps
Mode	802.11b	802.11a

Table 2-5. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 6 of 106

Configuration 3: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	6Mbps	6Mbps
Mode	802.11g	802.11a

Table 2-6. Config-3 (ANT1 MIMO & ANT2 MIMO)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D02 v01r04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.9 for AC line conducted emissions test setups, 7.7, 7.8 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report. The worst orientation was found to be Y-orientation (landscape).

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-NG930 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device supports two configurations: one is with screen open and one is with screen closed. Open, half opened and closed configurations are tested, and the worst case radiated emissions data is shown in this report.

2.4 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	ANT1 Antenna Gain [dBi]	ANT 2 Antenna Gain [dBi]
2.4	-5.1	-7.0

Table 2-7. Antenna Peak Gain

2.5 Software and Firmware

The test was conducted with software/firmware version F721USQU0AVED installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 7 of 106

V9.0 02/01/2019

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section Line-Conducted Test Data.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 8 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 9 of 106

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 10 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 11 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	12/19/2021	Annual	12/19/2022	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	12/19/2021	Annual	12/19/2022	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	12/19/2021	Annual	12/19/2022	WL40-1
-	ETS-001	EMC Cable and Switch System	12/9/2021	Annual	12/9/2022	ETS-001
-	ETS-002	EMC Cable and Switch System	3/10/2022	Annual	3/10/2023	ETS-002
-	AP1-002	EMC Cable and Switch System	3/9/2022	Annual	3/9/2023	AP1-002
-	AP2-001	EMC Cable and Switch System	1/4/2022	Annual	1/4/2023	AP2-001
-	AP2-002	EMC Cable and Switch System	3/11/2022	Annual	3/11/2023	AP2-002
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Agilent	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Anritsu	ML2495A	Power Meter	3/17/2022	Annual	3/17/2023	1328004
Anritsu	ML2495A	Power Meter	3/17/2022	Annual	3/17/2023	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2024	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2023	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	12/19/2021	Annual	12/19/2022	NMLC-2
Rohde & Schwarz	FSV40-N	Spectrum Analyzer	1/14/2021	Annual	8/3/2022	83244
Rohde & Schwarz	SMW200A	Vector Signal Generator		N/A		83365
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 12 of 106

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.

FCC ID: A3LSMF721JPN

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 13 of 106

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 14 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	8.092	0.500
2437	6	b	1	8.558	0.500
2462	11	b	1	8.093	0.500
2412	1	g	6	15.72	0.500
2437	6	g	6	15.33	0.500
2462	11	g	6	15.77	0.500
2412	1	n	6.5/7.2 (MCS0)	16.05	0.500
2437	6	n	6.5/7.2 (MCS0)	15.17	0.500
2462	11	n	6.5/7.2 (MCS0)	16.34	0.500
2412	1	ax	6.5/7.2 (MCS0)	15.98	0.500
2437	6	ax	6.5/7.2 (MCS0)	15.16	0.500
2462	11	ax	6.5/7.2 (MCS0)	16.37	0.500

Table 7-2. Conducted Bandwidth Measurements SISO ANT1

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 15 of 106




Plot 7-1. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 1)

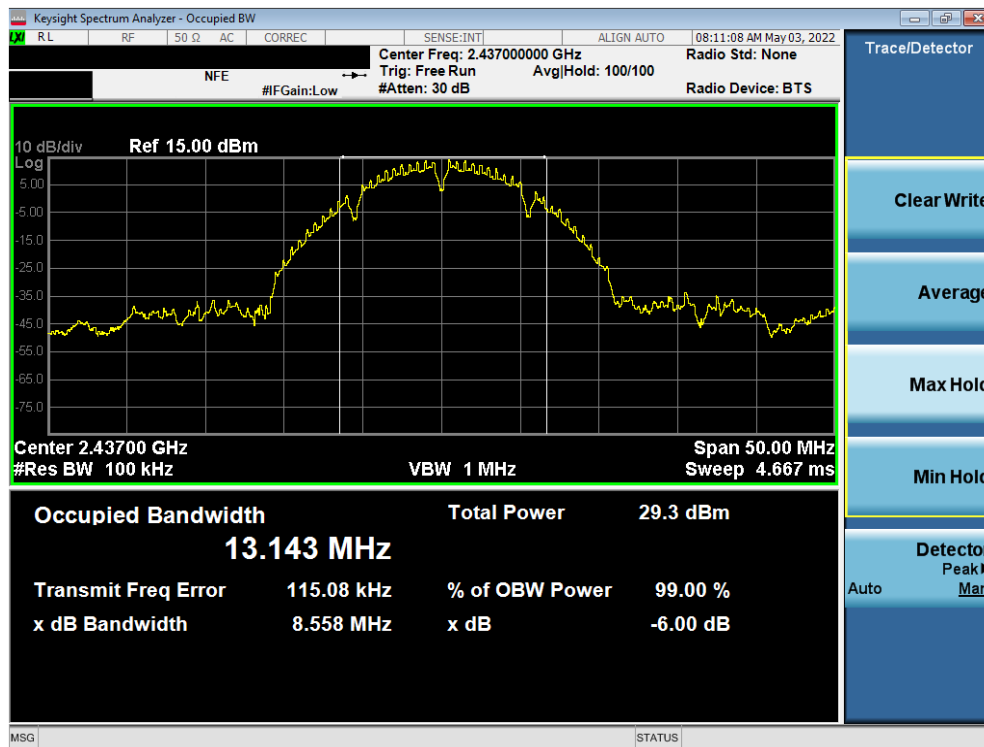


Plot 7-2. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 16 of 106

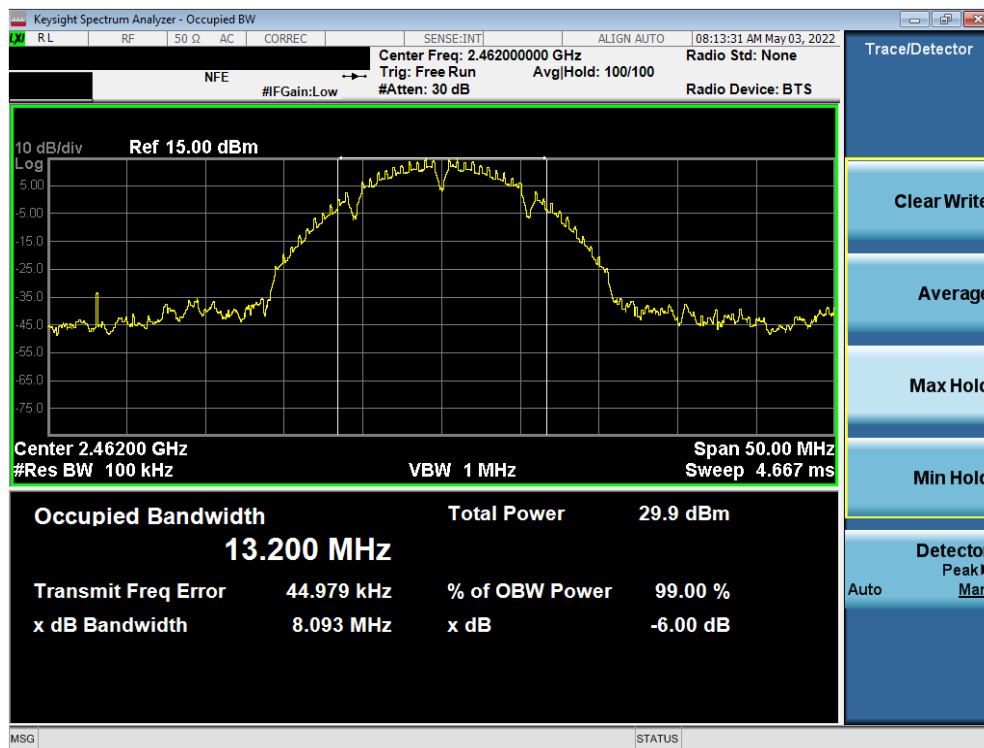


Plot 7-3. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 11)

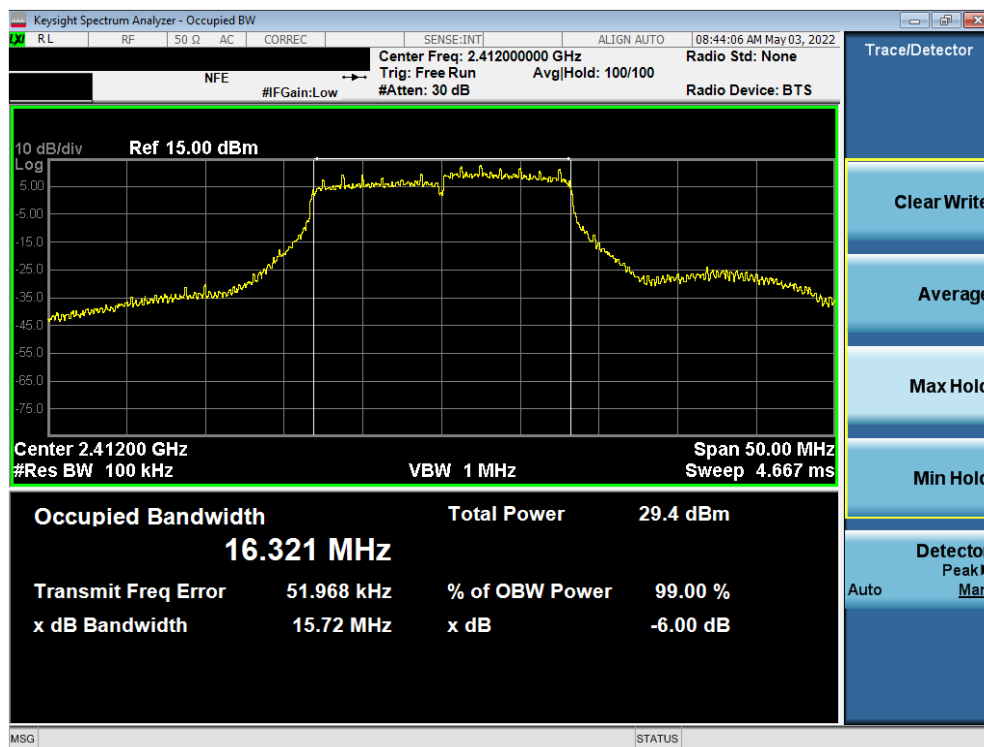


Plot 7-4. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 17 of 106

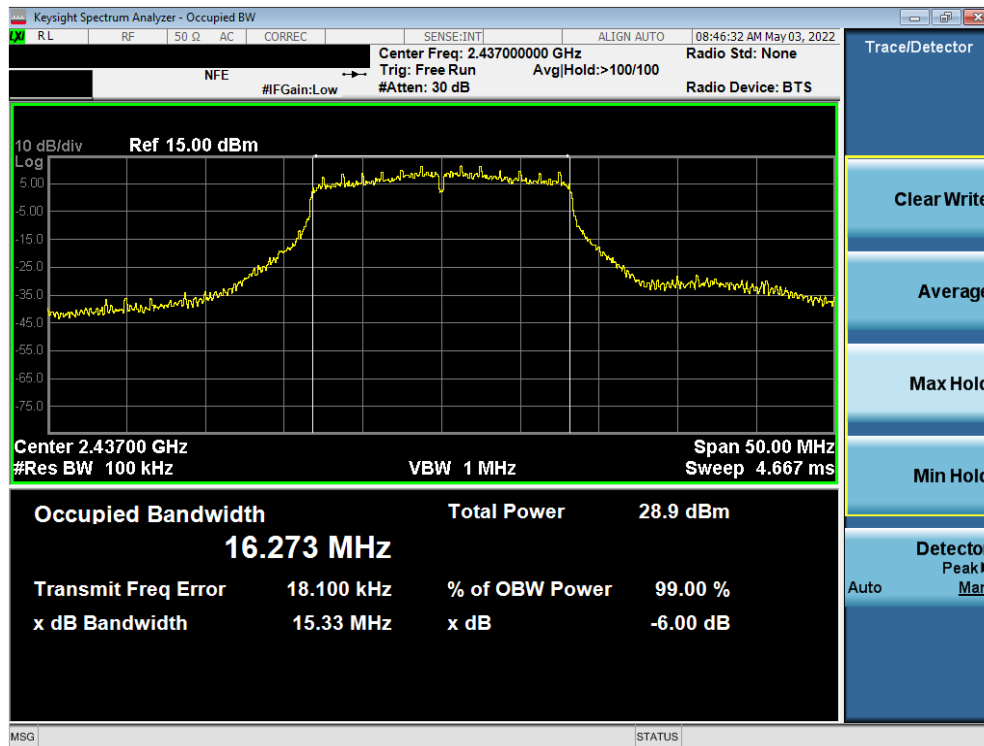


Plot 7-5. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 6)

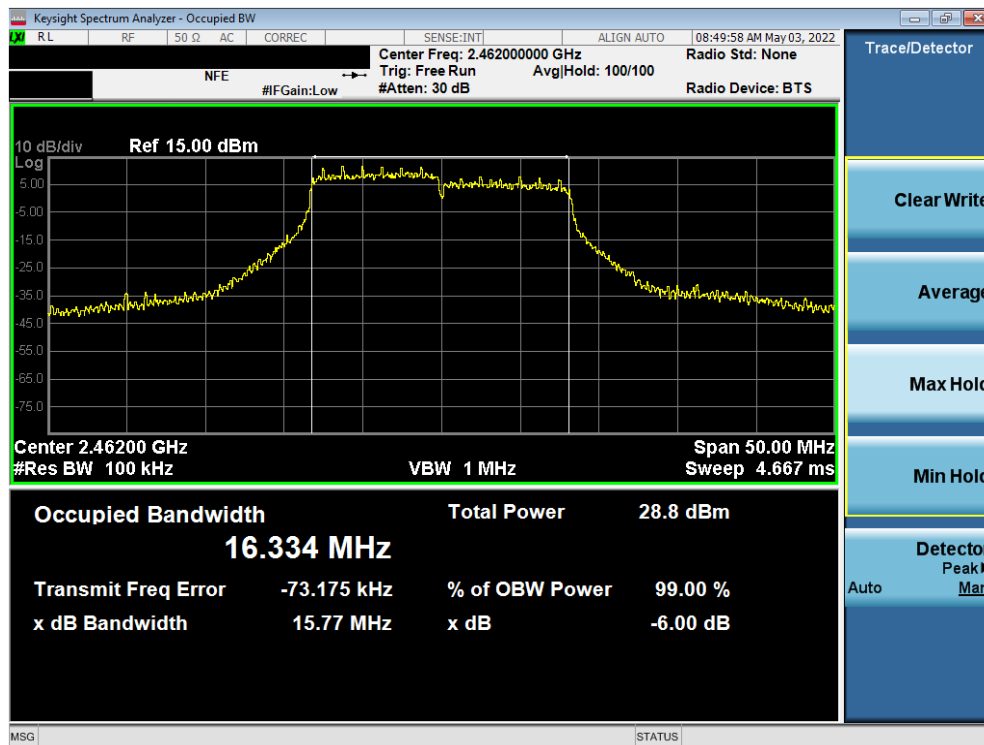


Plot 7-6. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 18 of 106

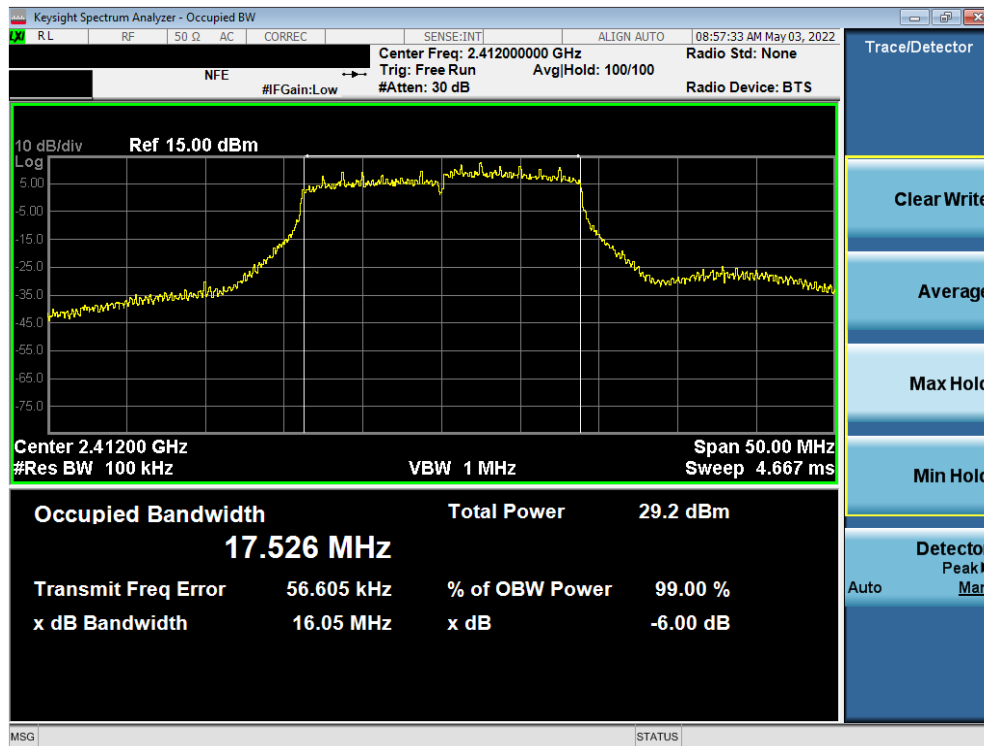


Plot 7-7. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

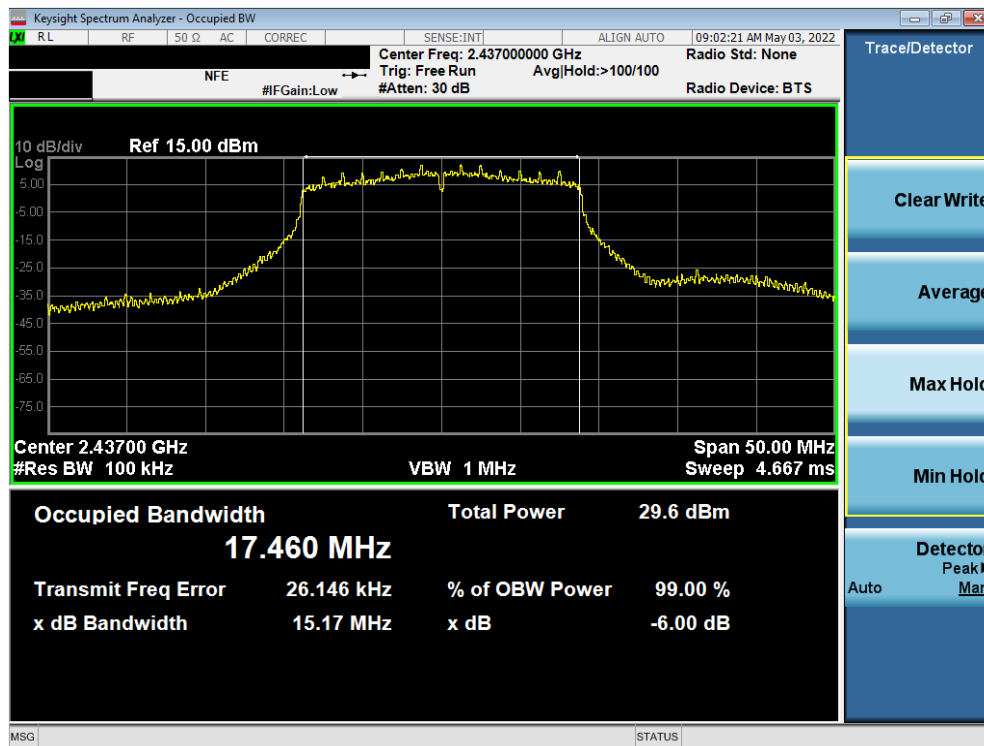


Plot 7-8. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 19 of 106

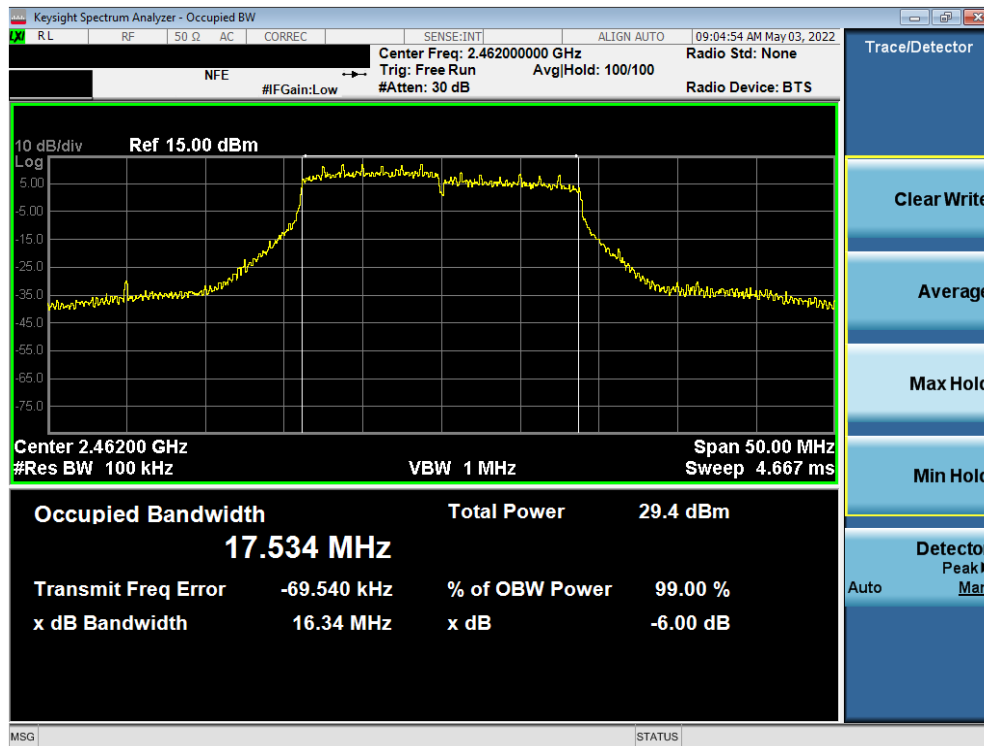


Plot 7-9. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

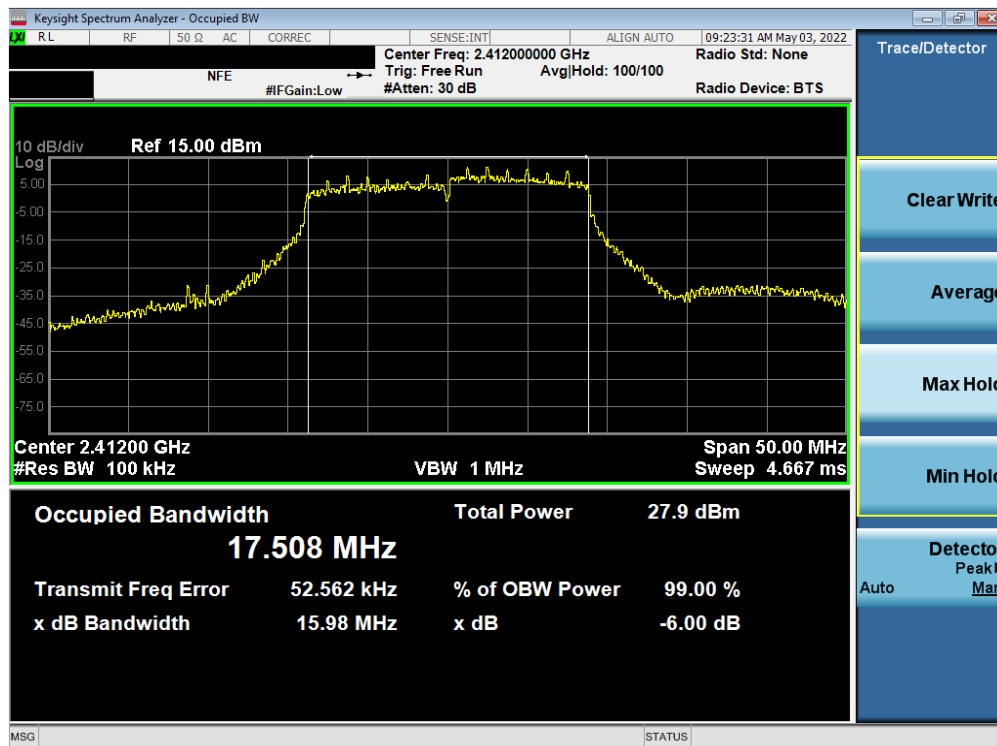


Plot 7-10. 6dB Bandwidth Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 20 of 106

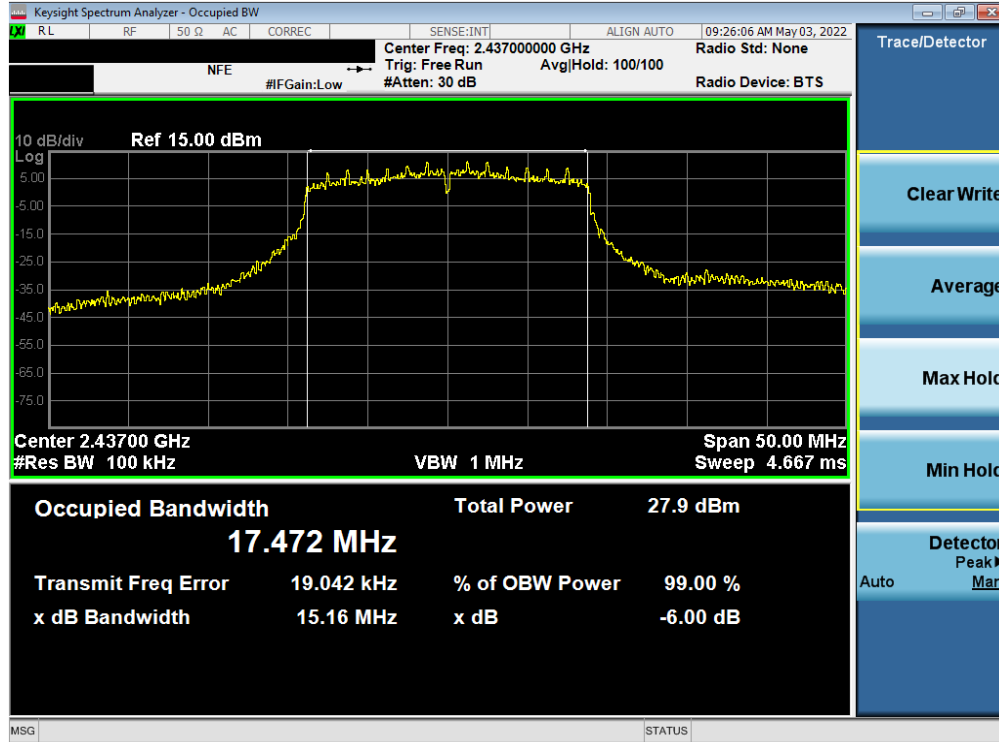

Plot 7-11. 6dB Bandwidth Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 6)

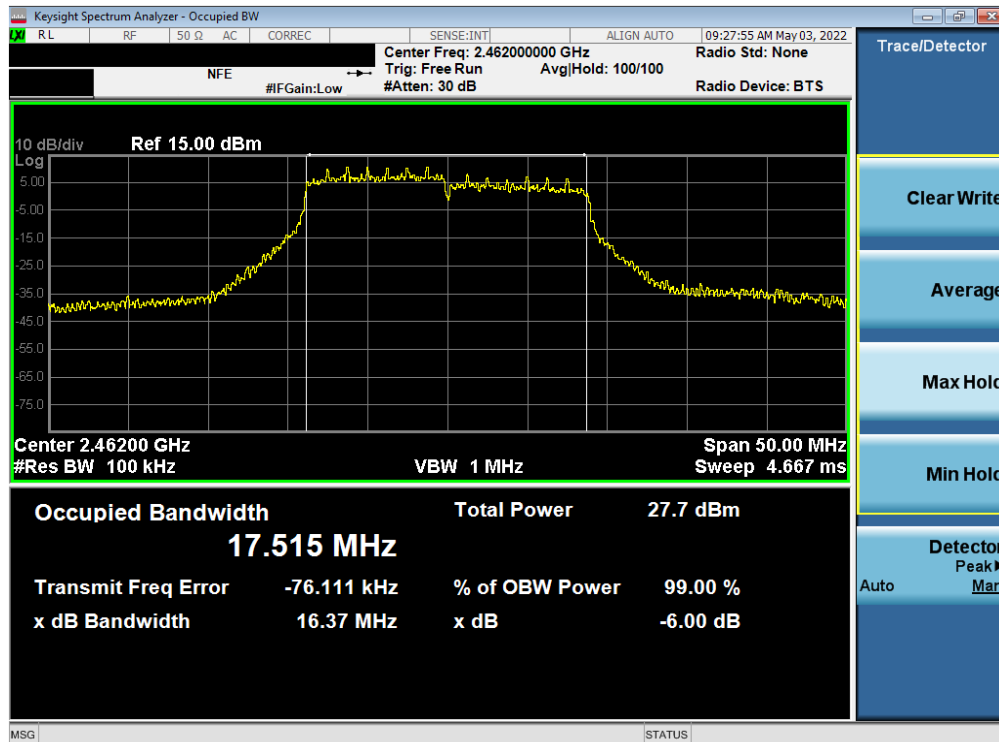

Plot 7-12. 6dB Bandwidth Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 11)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 21 of 106

SISO Antenna-2 6 dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	7.646	0.500
2437	6	b	1	8.564	0.500
2462	11	b	1	8.079	0.500
2412	1	g	6	14.50	0.500
2437	6	g	6	15.35	0.500
2462	11	g	6	15.74	0.500
2412	1	n	6.5/7.2 (MCS0)	15.09	0.500
2437	6	n	6.5/7.2 (MCS0)	15.17	0.500
2462	11	n	6.5/7.2 (MCS0)	16.37	0.500
2412	1	ax	6.5/7.2 (MCS0)	15.73	0.500
2437	6	ax	6.5/7.2 (MCS0)	15.17	0.500
2462	11	ax	6.5/7.2 (MCS0)	16.34	0.500

Table 7-3. Conducted Bandwidth Measurements SISO ANT2

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 22 of 106

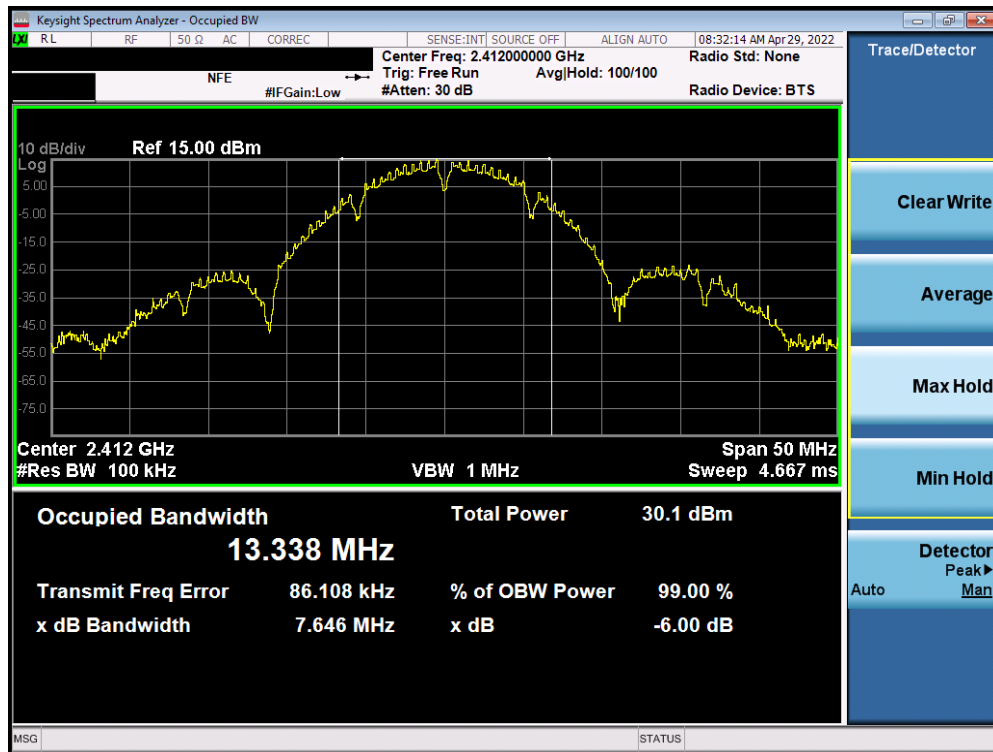


Plot 7-13. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 1)




Plot 7-14. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 23 of 106

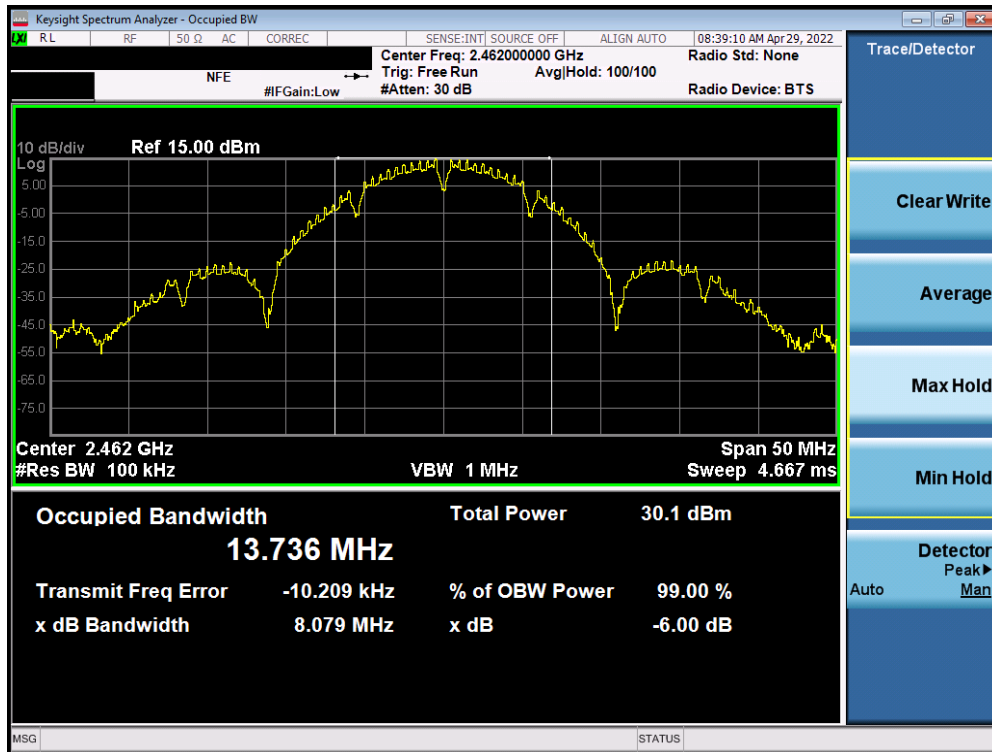


Plot 7-15. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 11)

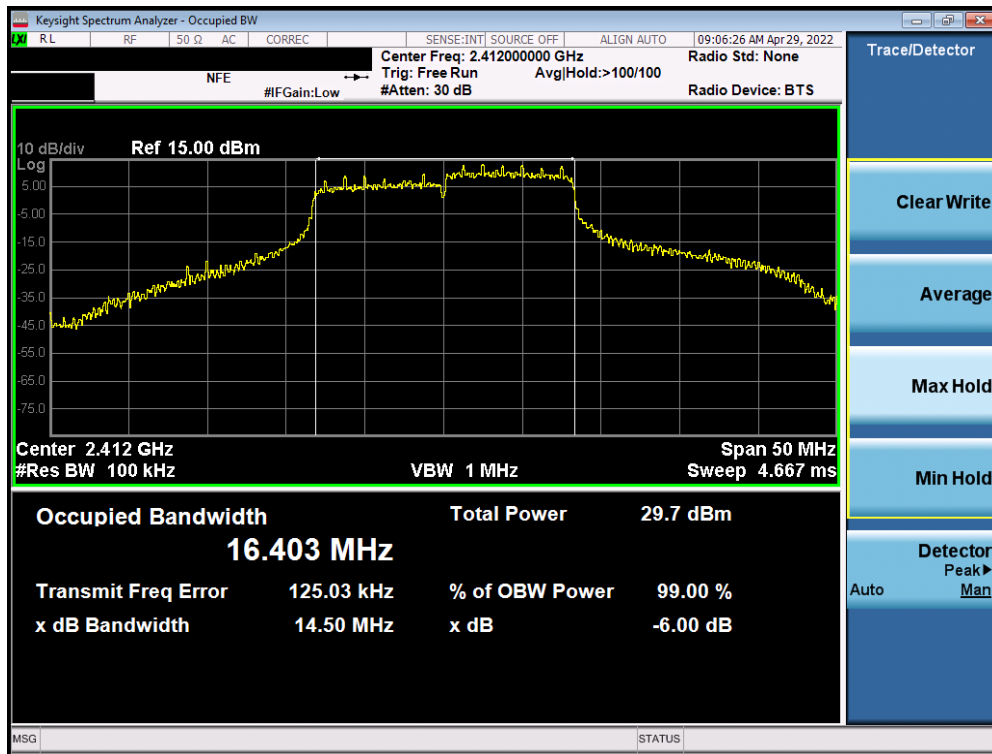


Plot 7-16. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 24 of 106

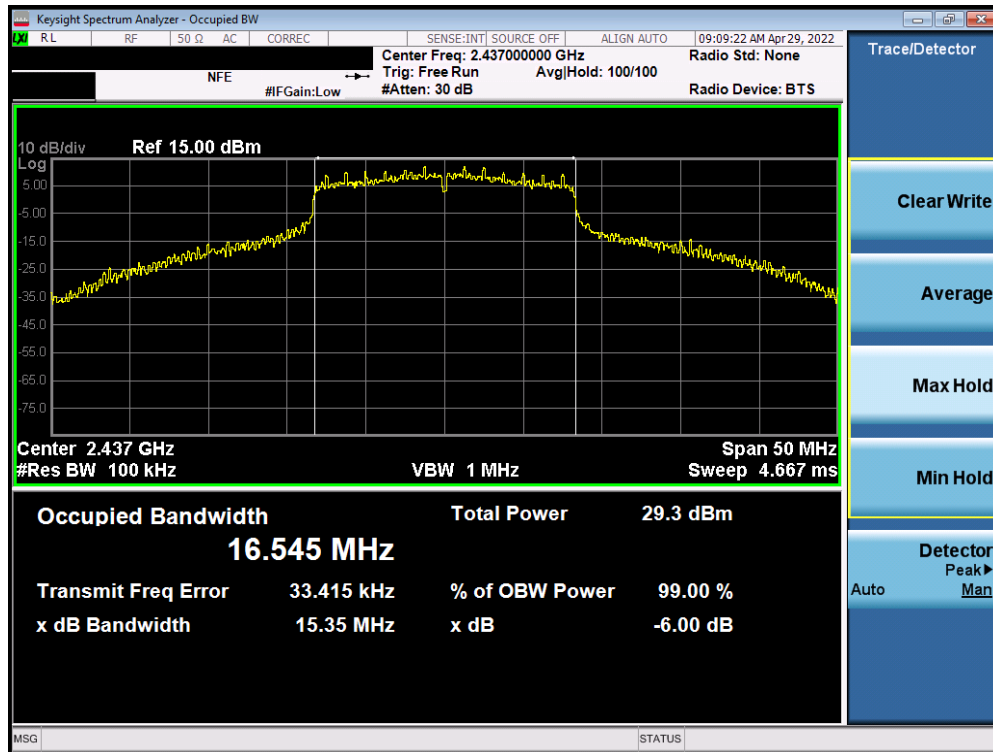


Plot 7-17. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 6)

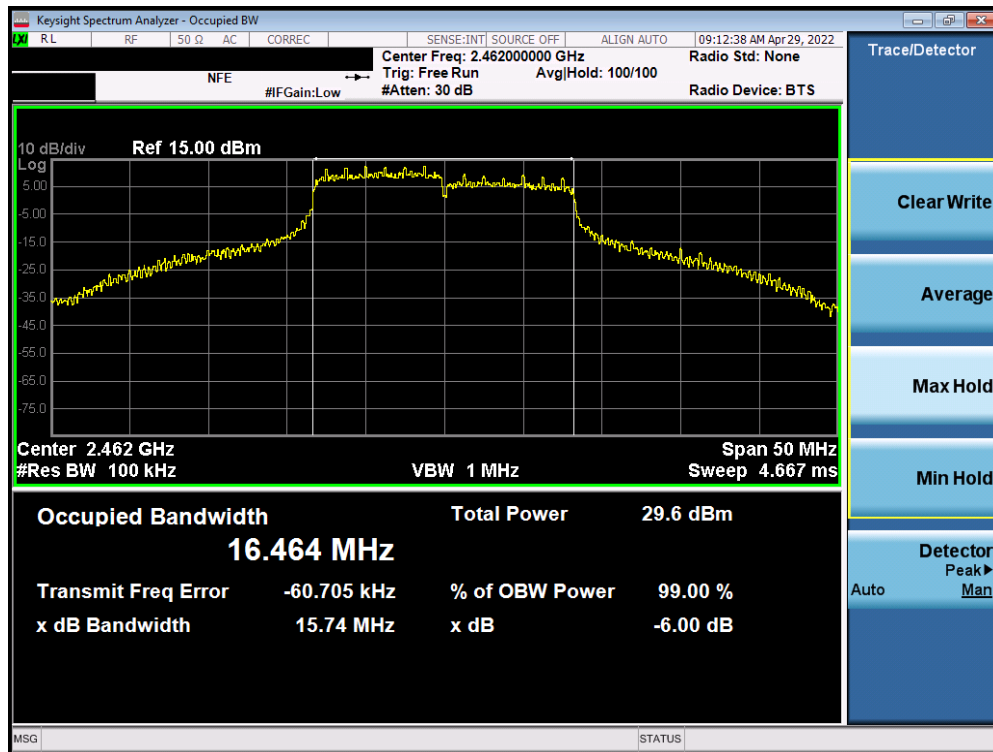


Plot 7-18. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 25 of 106

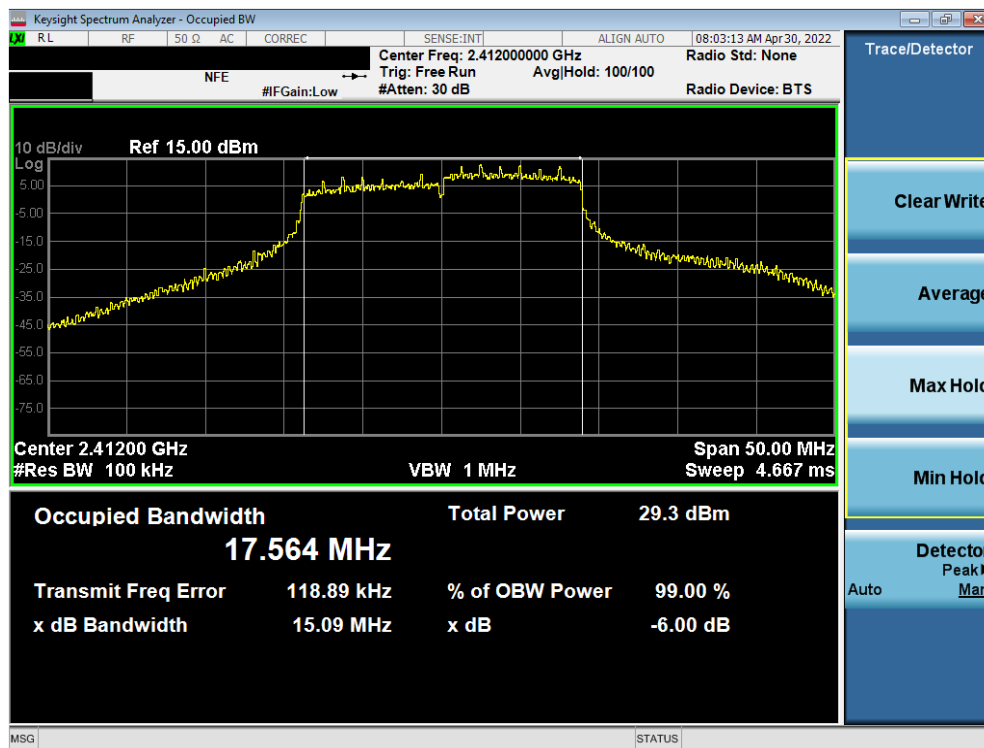


Plot 7-19. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

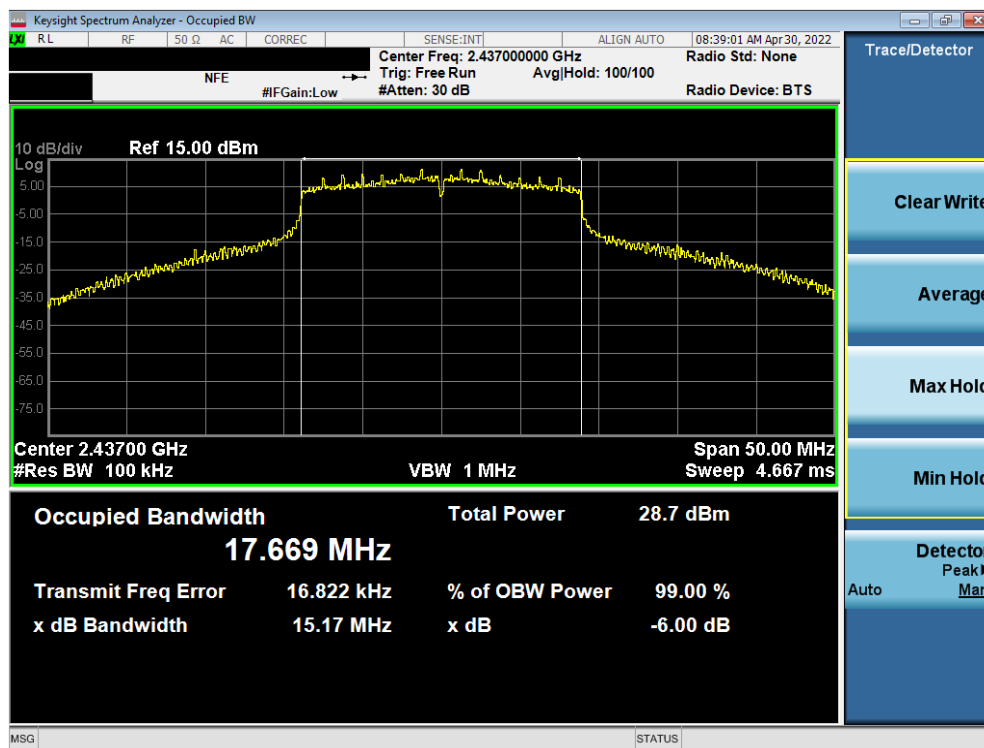


Plot 7-20. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 26 of 106

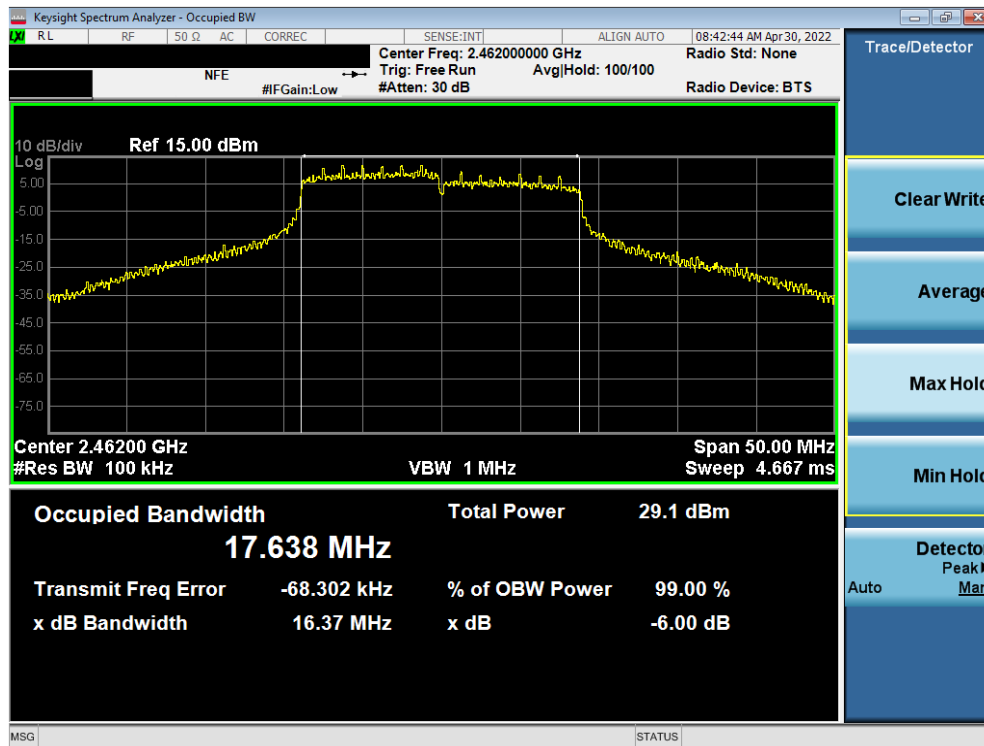


Plot 7-21. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

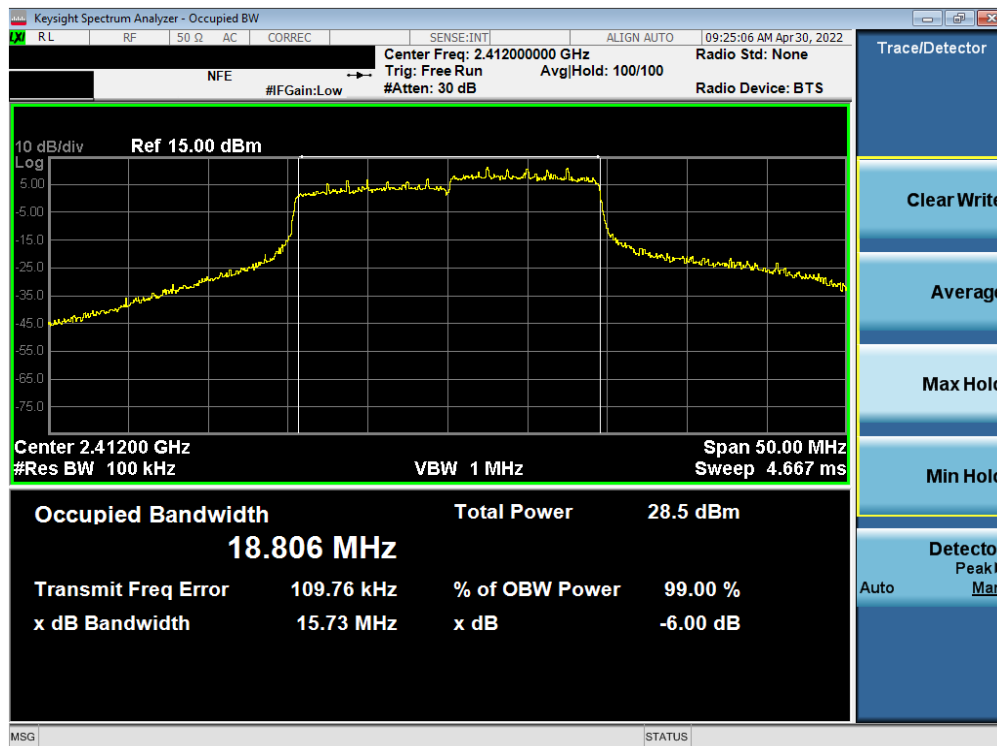


Plot 7-22. 6dB Bandwidth Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 27 of 106

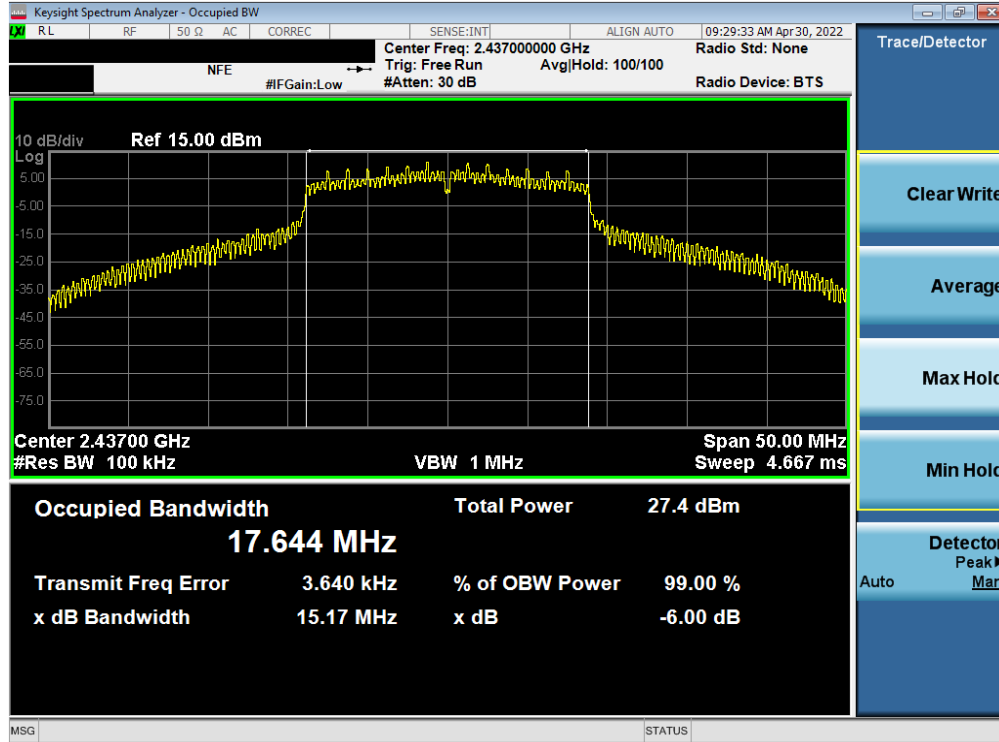

Plot 7-23. 6dB Bandwidth Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 6)

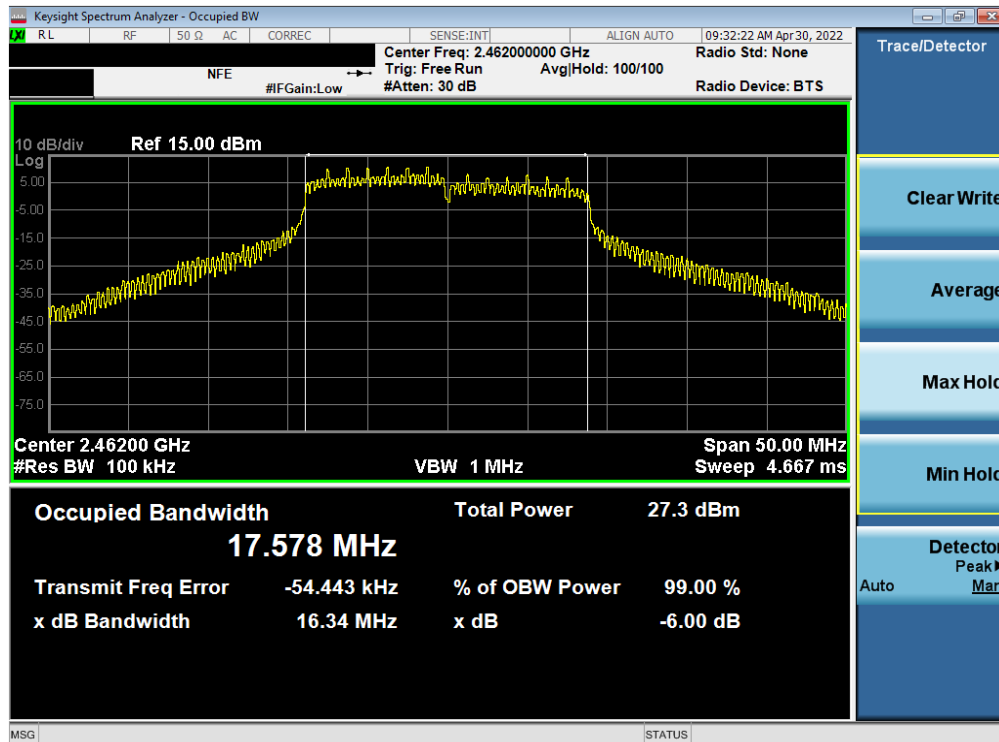

Plot 7-24. 6dB Bandwidth Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 28 of 106

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 29 of 106

V9.0 02/01/2019

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11b	802.11g	802.11n	802.11ax		
	2412	1	AVG	17.54	15.21	15.45	15.46	30.00	-12.46
			PEAK	22.91	22.87	24.08	22.68	30.00	-5.92
	2437	6	AVG	17.55	15.46	15.89	15.89	30.00	-12.45
			PEAK	21.86	22.02	23.10	21.87	30.00	-6.90
	2462	11	AVG	17.26	15.23	15.61	15.23	30.00	-12.74
			PEAK	22.32	21.75	24.33	21.66	30.00	-5.67
	2467	12	AVG	5.96	5.95	5.63	5.89	30.00	-24.04
			PEAK	9.92	12.21	11.75	12.39	30.00	-17.79
	2472	13	AVG	-0.19	-0.40	-0.44	-0.09	30.00	-30.19
			PEAK	3.74	5.75	5.73	6.28	30.00	-24.25

Table 7-4. Conducted Output Power Measurements SISO ANT1

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11b	802.11g	802.11n	802.11ax		
	2412	1	AVG	17.82	15.97	15.87	15.91	30.00	-12.18
			PEAK	22.29	21.71	23.55	21.90	30.00	-6.45
	2437	6	AVG	17.32	15.81	15.58	15.62	30.00	-12.68
			PEAK	22.34	21.82	23.62	22.01	30.00	-6.38
	2462	11	AVG	17.96	15.49	15.40	15.17	30.00	-12.04
			PEAK	22.10	21.38	23.60	21.63	30.00	-6.40
	2467	12	AVG	5.75	5.97	5.62	5.73	30.00	-24.03
			PEAK	9.71	12.23	11.91	12.66	30.00	-17.77
	2472	13	AVG	-0.27	-0.02	-0.18	-0.09	30.00	-30.02
			PEAK	3.80	6.24	6.04	7.06	30.00	-23.76

Table 7-5. Conducted Output Power Measurements SISO ANT2

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
	2412	1	AVG	15.21	15.97	18.62	30.00	-11.38
			PEAK	22.87	21.71	25.34	30.00	-4.66
	2437	6	AVG	15.46	15.81	18.65	30.00	-11.35
			PEAK	22.02	21.82	24.93	30.00	-5.07
	2462	11	AVG	15.23	15.49	18.37	30.00	-11.63
			PEAK	21.75	21.38	24.58	30.00	-5.42
	2467	12	AVG	5.95	5.97	8.97	30.00	-21.03
			PEAK	12.21	12.23	15.23	30.00	-14.77
	2472	13	AVG	-0.40	-0.02	2.80	30.00	-27.20
			PEAK	5.75	6.24	9.01	30.00	-20.99

Table 7-6. Conducted Output Power Measurements MIMO (802.11g)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 30 of 106

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
	2412	1	AVG	15.45	15.87	18.68	30.00	-11.32
			PEAK	24.08	23.55	26.83	30.00	-3.17
	2437	6	AVG	15.89	15.58	18.75	30.00	-11.25
			PEAK	23.10	23.62	26.38	30.00	-3.62
	2462	11	AVG	15.61	15.40	18.52	30.00	-11.48
			PEAK	24.33	23.60	26.99	30.00	-3.01
	2467	12	AVG	5.63	5.62	8.64	30.00	-21.36
			PEAK	11.75	11.91	14.84	30.00	-15.16
	2472	13	AVG	-0.44	-0.18	2.70	30.00	-27.30
			PEAK	5.73	6.04	8.90	30.00	-21.10

Table 7-7. Conducted Output Power Measurements MIMO (802.11n)

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
	2412	1	AVG	15.46	15.91	18.70	30.00	-11.30
			PEAK	22.68	21.90	25.32	30.00	-4.68
	2437	6	AVG	15.89	15.62	18.77	30.00	-11.23
			PEAK	21.87	22.01	24.95	30.00	-5.05
	2462	11	AVG	15.23	15.17	18.21	30.00	-11.79
			PEAK	21.66	21.63	24.66	30.00	-5.34
	2467	12	AVG	5.89	5.73	8.82	30.00	-21.18
			PEAK	12.39	12.66	15.54	30.00	-14.46
	2472	13	AVG	-0.09	-0.09	2.92	30.00	-27.08
			PEAK	6.28	7.06	9.70	30.00	-20.30

Table 7-8. Conducted Output Power Measurements MIMO (802.11ax)

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 15.21 dBm for Antenna 1 and 15.97 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(15.21 \text{ dBm} + 15.97 \text{ dBm}) = (33.19 \text{ mW} + 39.53 \text{ mW}) = 72.72 \text{ mW} = 18.61 \text{ dBm}$$

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 31 of 106

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 32 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	6.05	8.00	-1.95	Pass
2437	6	b	1	4.93	8.00	-3.07	Pass
2462	11	b	1	4.95	8.00	-3.05	Pass
2412	1	g	6	3.51	8.00	-4.49	Pass
2437	6	g	6	3.18	8.00	-4.82	Pass
2462	11	g	6	4.38	8.00	-3.62	Pass
2412	1	n	6.5/7.2 (MCS0)	3.77	8.00	-4.23	Pass
2437	6	n	6.5/7.2 (MCS0)	3.07	8.00	-4.94	Pass
2462	11	n	6.5/7.2 (MCS0)	3.37	8.00	-4.63	Pass
2412	1	ax	6.5/7.2 (MCS0)	-4.50	8.00	-12.50	Pass
2437	6	ax	6.5/7.2 (MCS0)	-5.03	8.00	-13.03	Pass
2462	11	ax	6.5/7.2 (MCS0)	-5.23	8.00	-13.23	Pass

Table 7-9. Conducted Power Density Measurements SISO ANT1


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 33 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

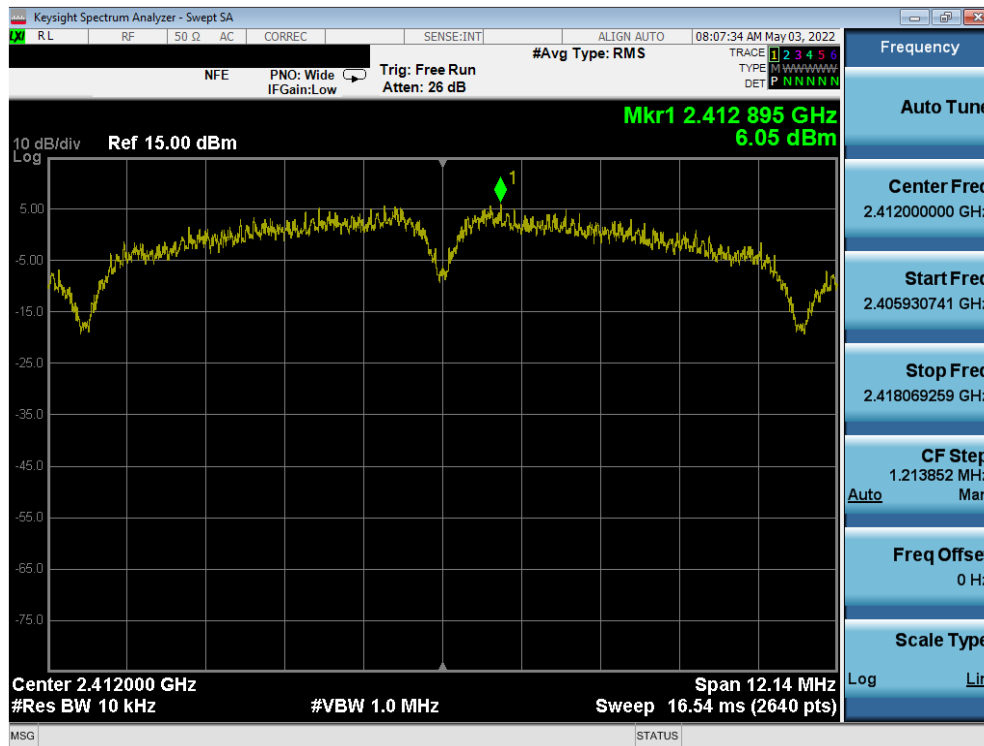


Plot 7-25. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 1)

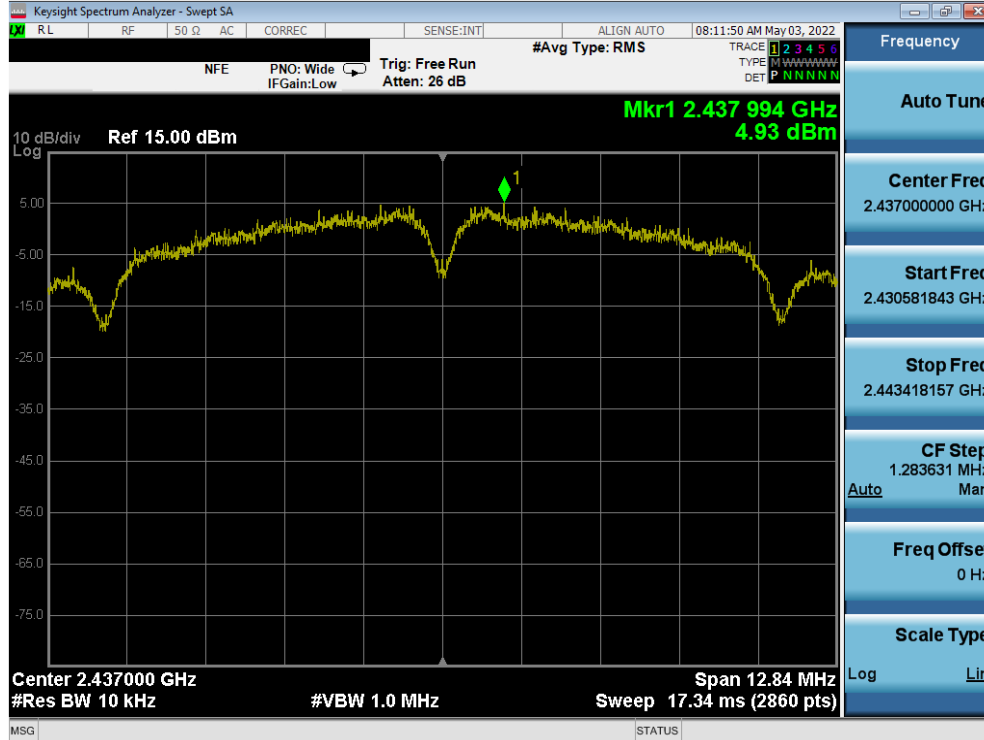


Plot 7-26. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 34 of 106

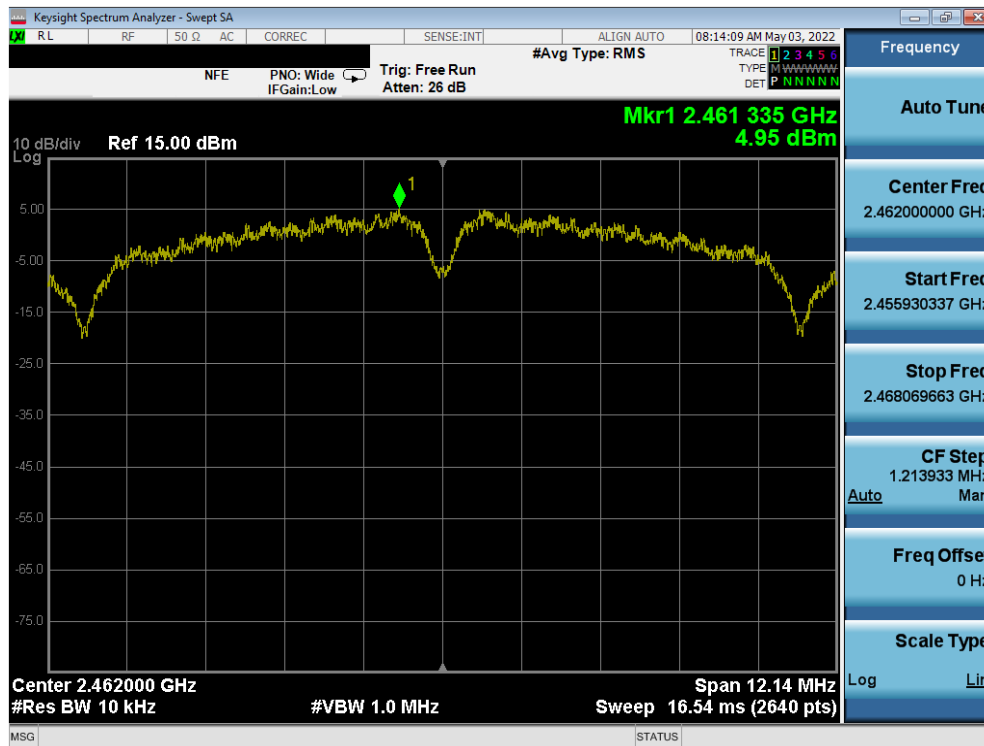


Plot 7-27. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 11)

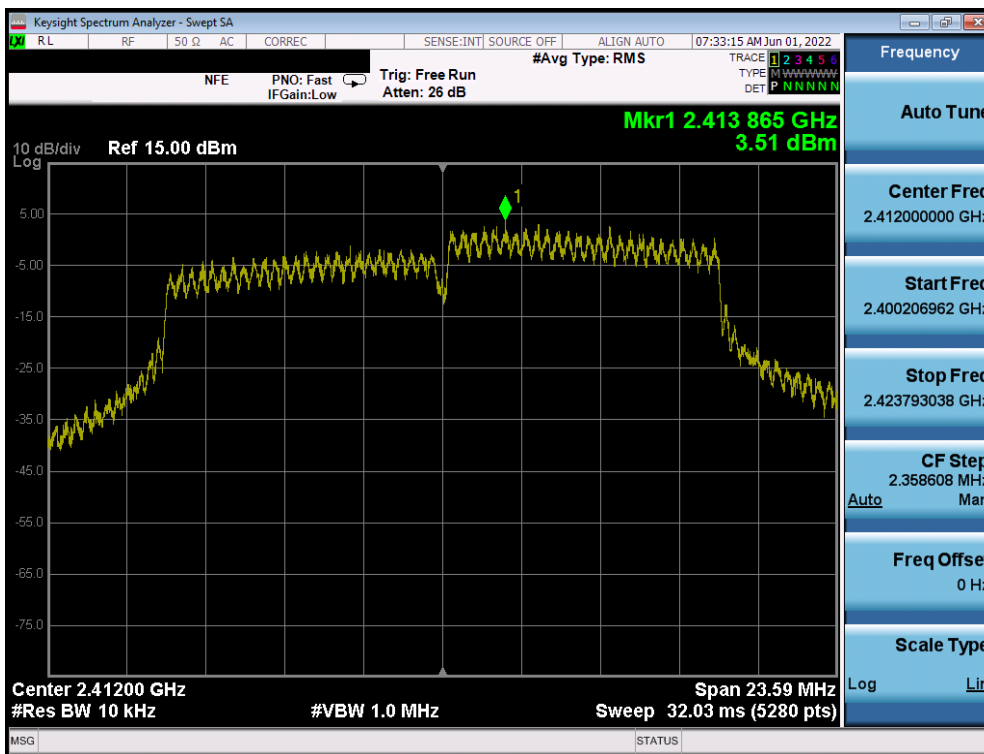


Plot 7-28. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 35 of 106


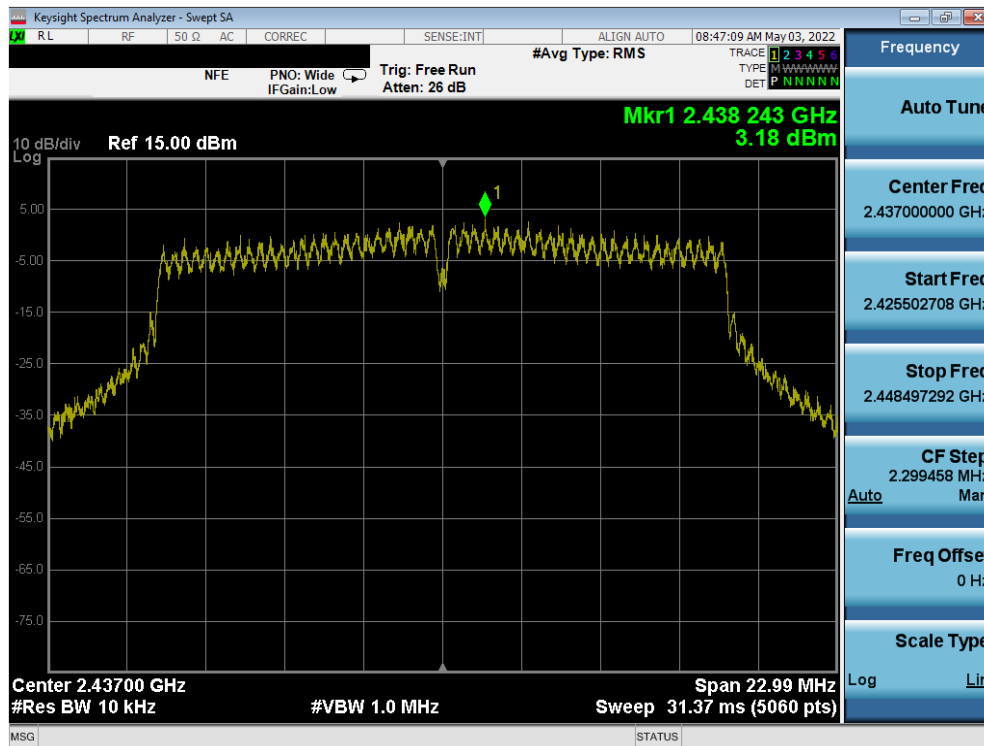


Plot 7-29. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 6)

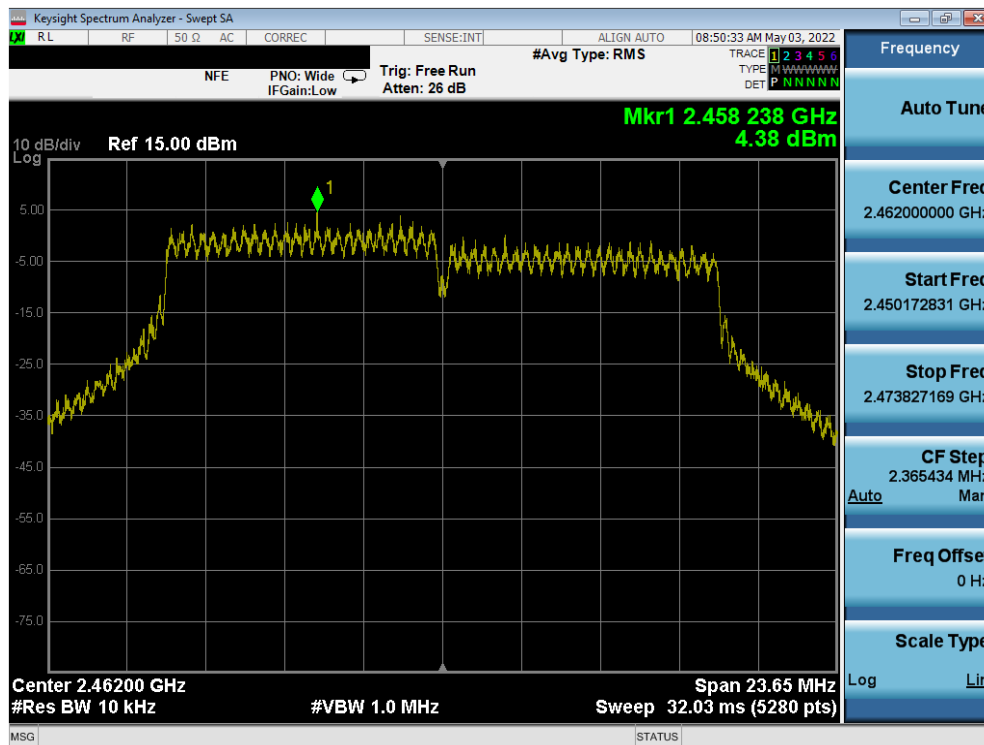


Plot 7-30. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 11)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 36 of 106

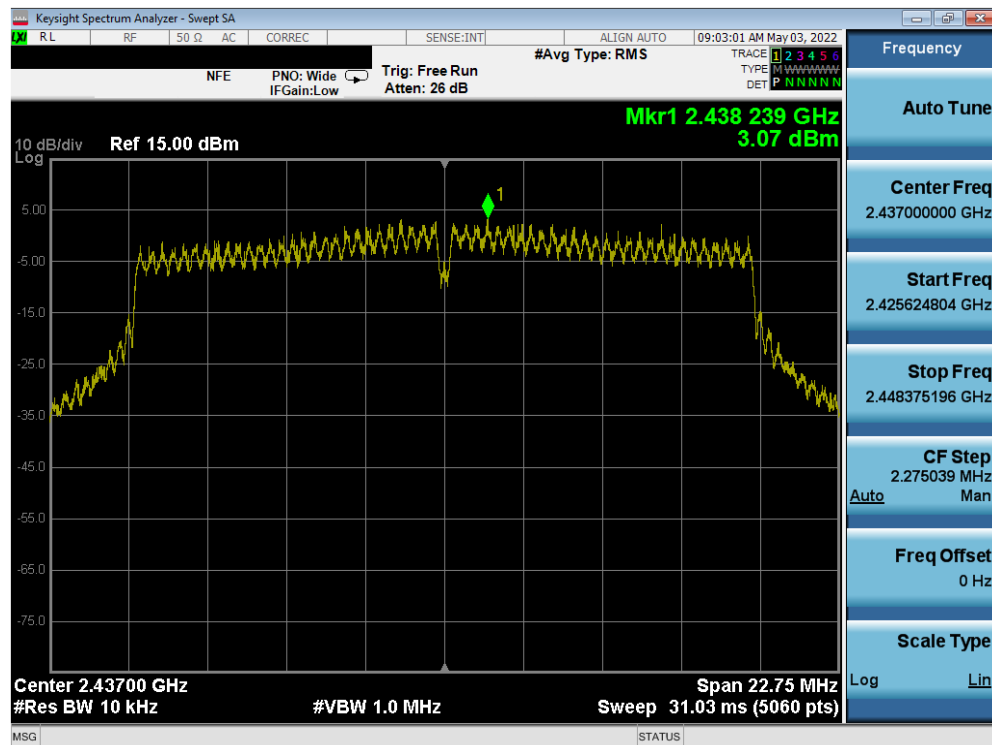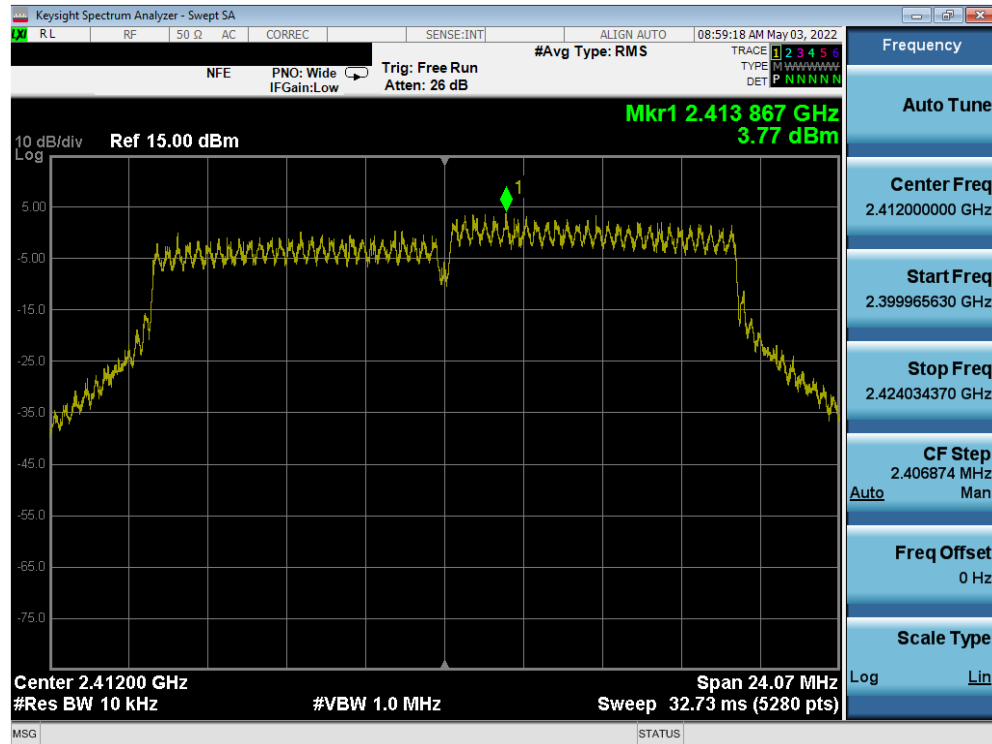

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 37 of 106

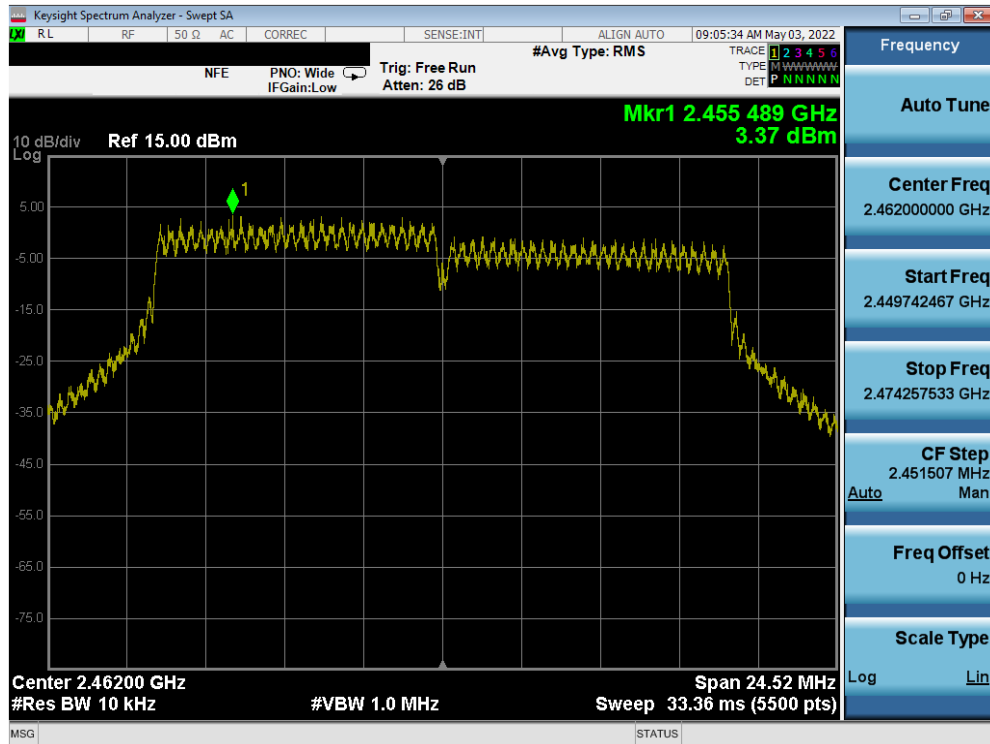


Plot 7-33. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

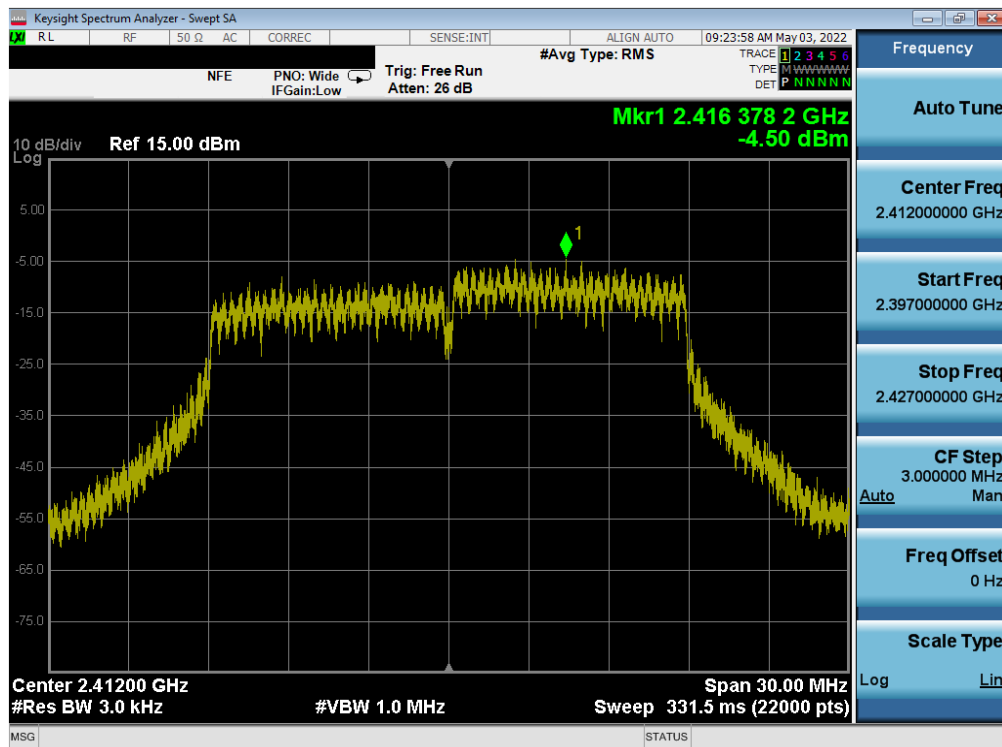


Plot 7-34. Power Spectral Density Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 38 of 106

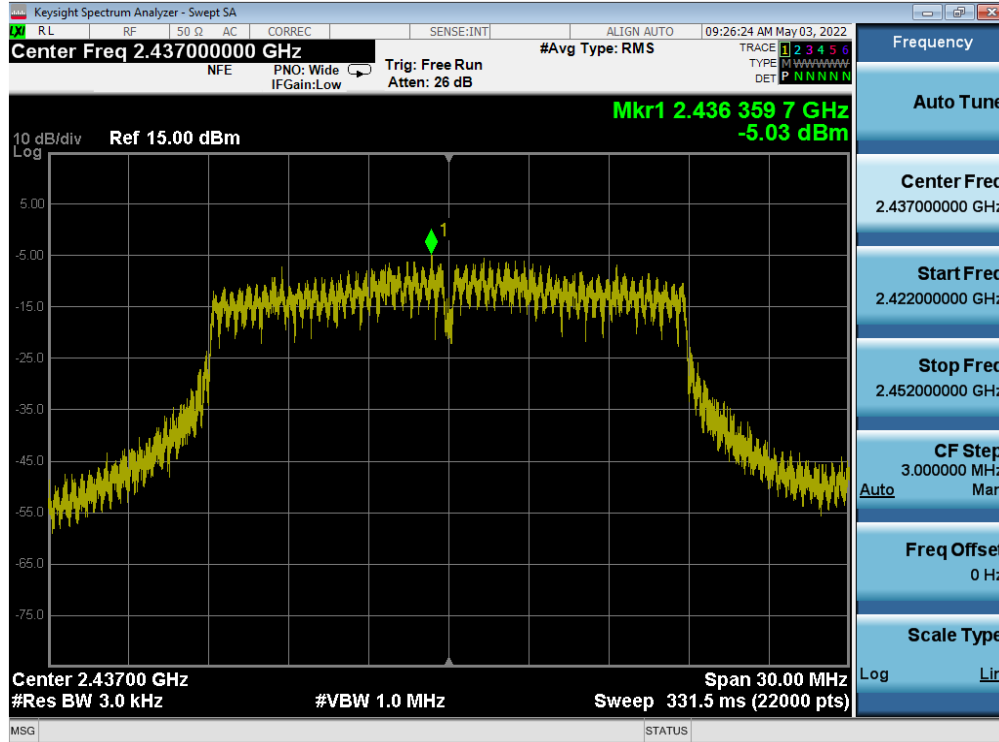

Plot 7-35. Power Spectral Density Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 6)

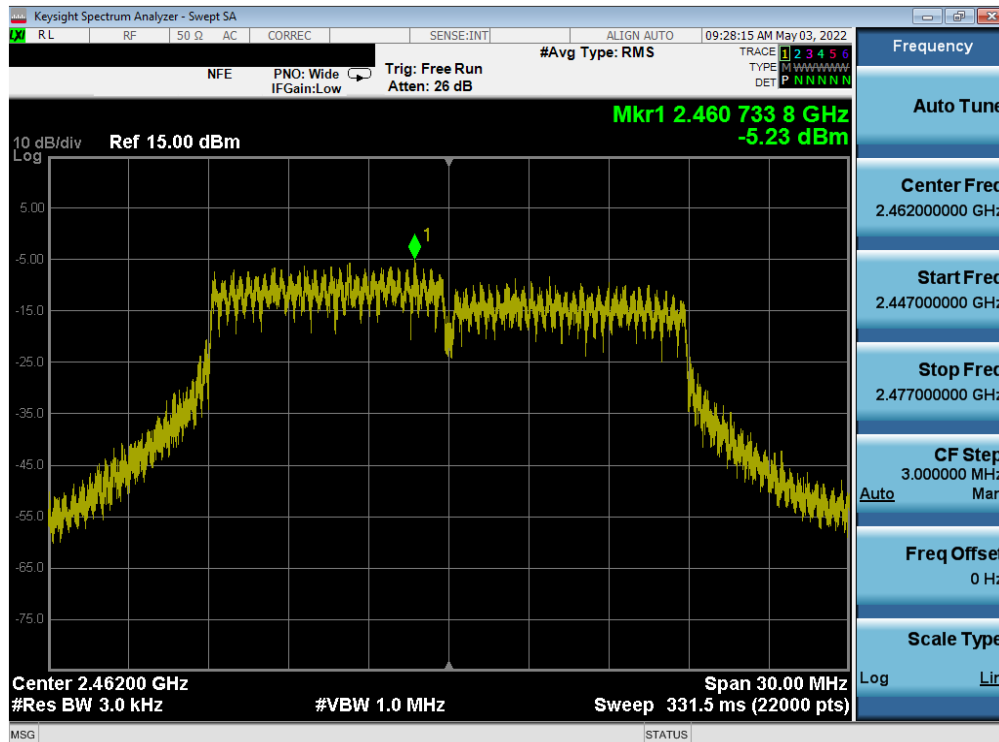

Plot 7-36. Power Spectral Density Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 11)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 39 of 106

SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	5.86	8.00	-2.15	Pass
2437	6	b	1	5.95	8.00	-2.05	Pass
2462	11	b	1	5.35	8.00	-2.65	Pass
2412	1	g	6	3.95	8.00	-4.05	Pass
2437	6	g	6	3.22	8.00	-4.78	Pass
2462	11	g	6	4.37	8.00	-3.63	Pass
2412	1	n	6.5/7.2 (MCS0)	3.79	8.00	-4.21	Pass
2437	6	n	6.5/7.2 (MCS0)	3.93	8.00	-4.08	Pass
2462	11	n	6.5/7.2 (MCS0)	2.88	8.00	-5.12	Pass
2412	1	ax	6.5/7.2 (MCS0)	1.87	8.00	-6.13	Pass
2437	6	ax	6.5/7.2 (MCS0)	4.18	8.00	-3.82	Pass
2462	11	ax	6.5/7.2 (MCS0)	3.34	8.00	-4.66	Pass

Table 7-10. Conducted Power Density Measurements SISO ANT2

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 40 of 106

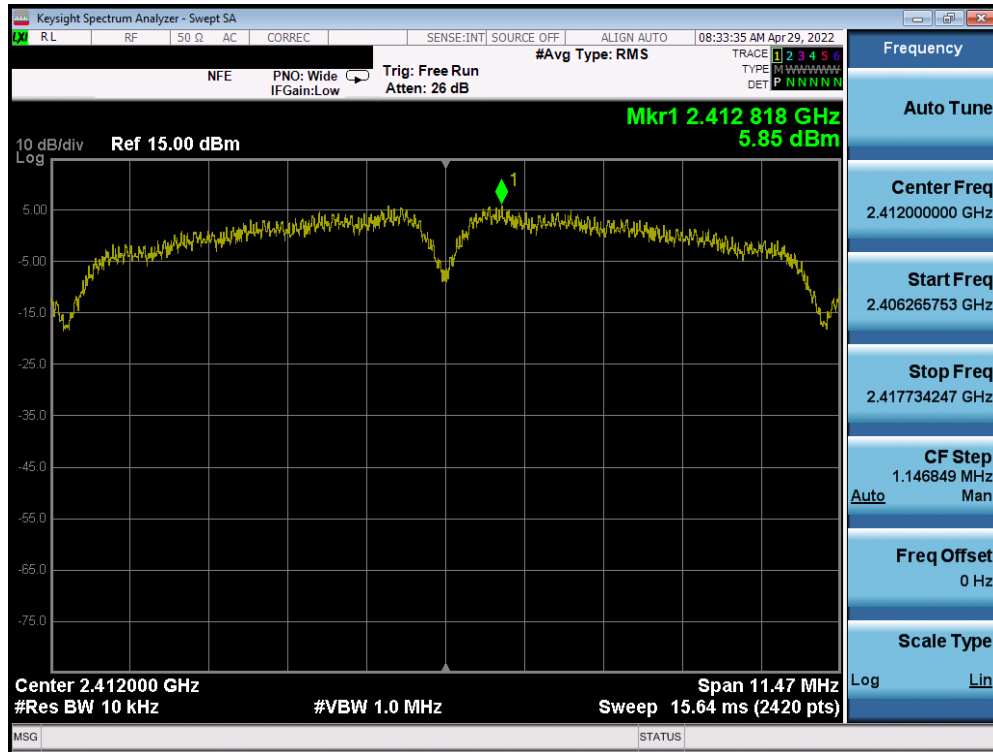



Plot 7-37. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 1)

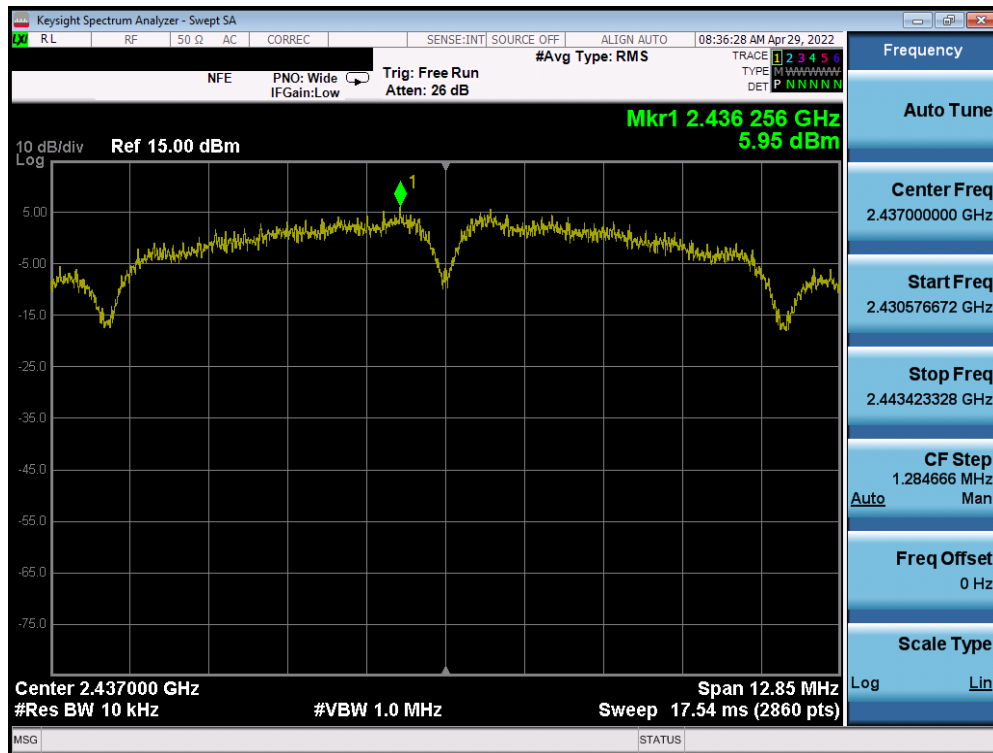


Plot 7-38. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 41 of 106

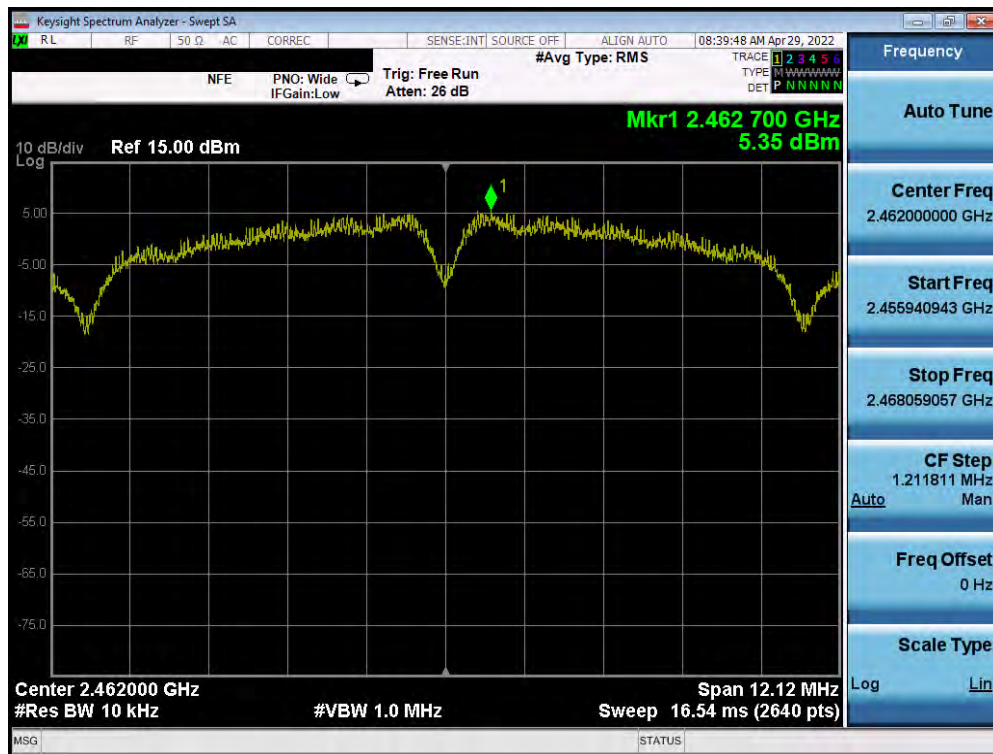


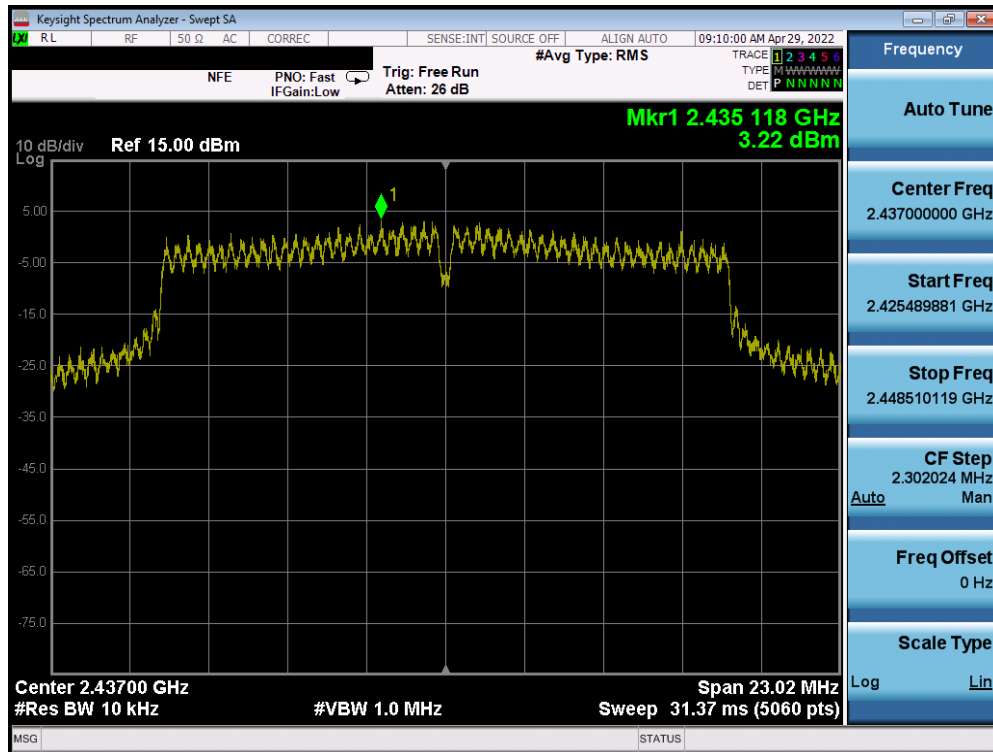


Plot 7-41. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 6)


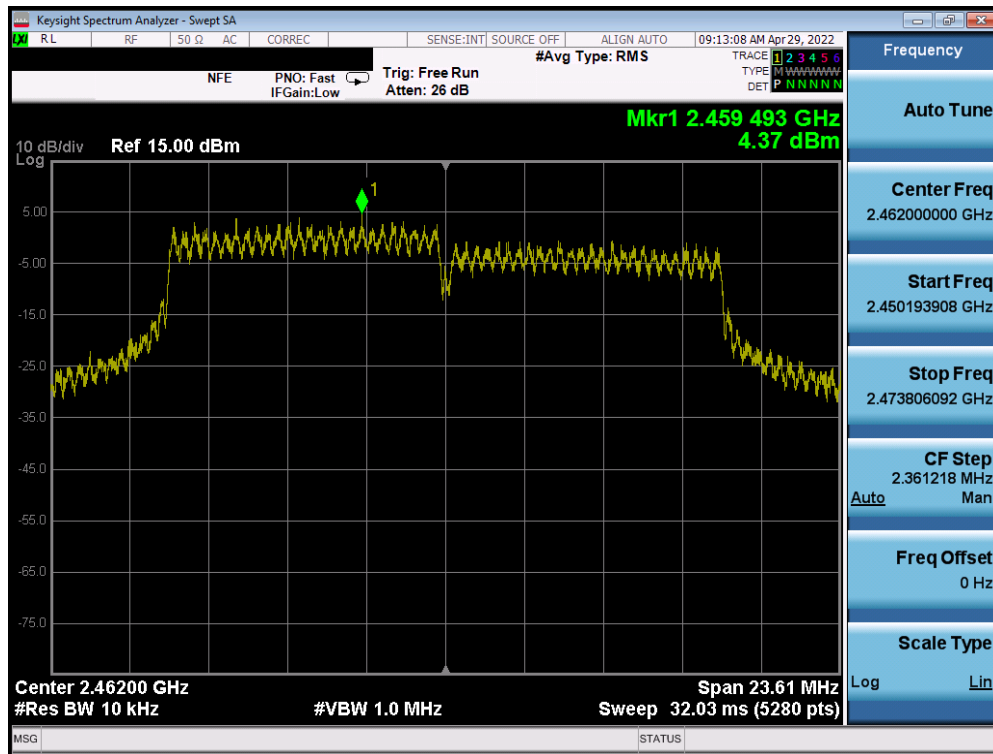


Plot 7-42. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 11)



FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 43 of 106

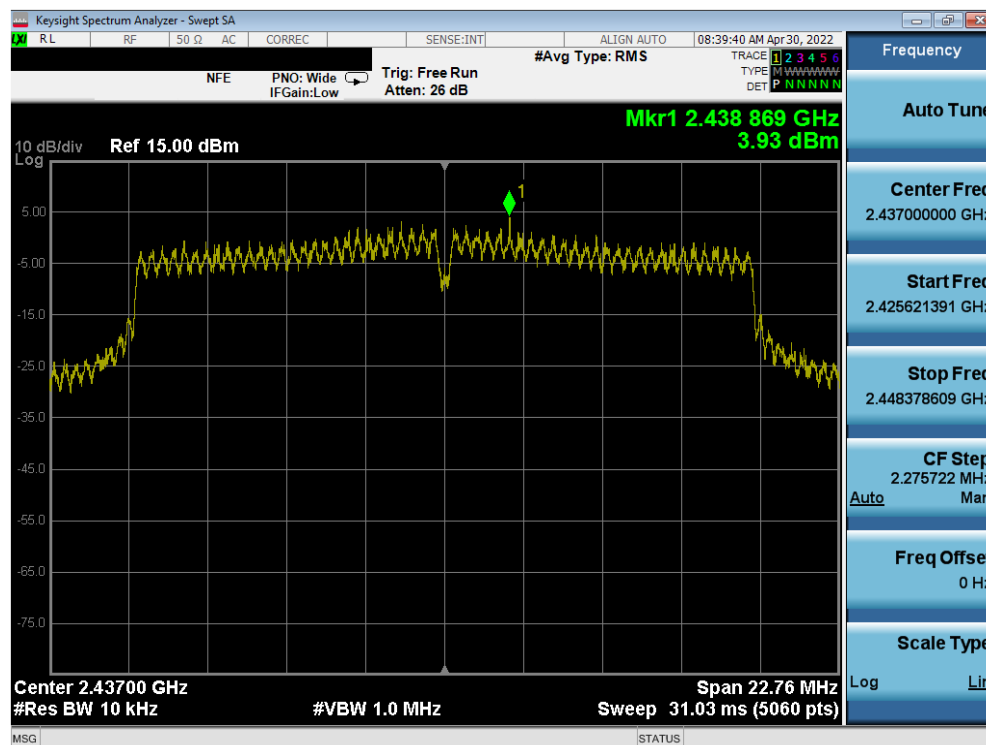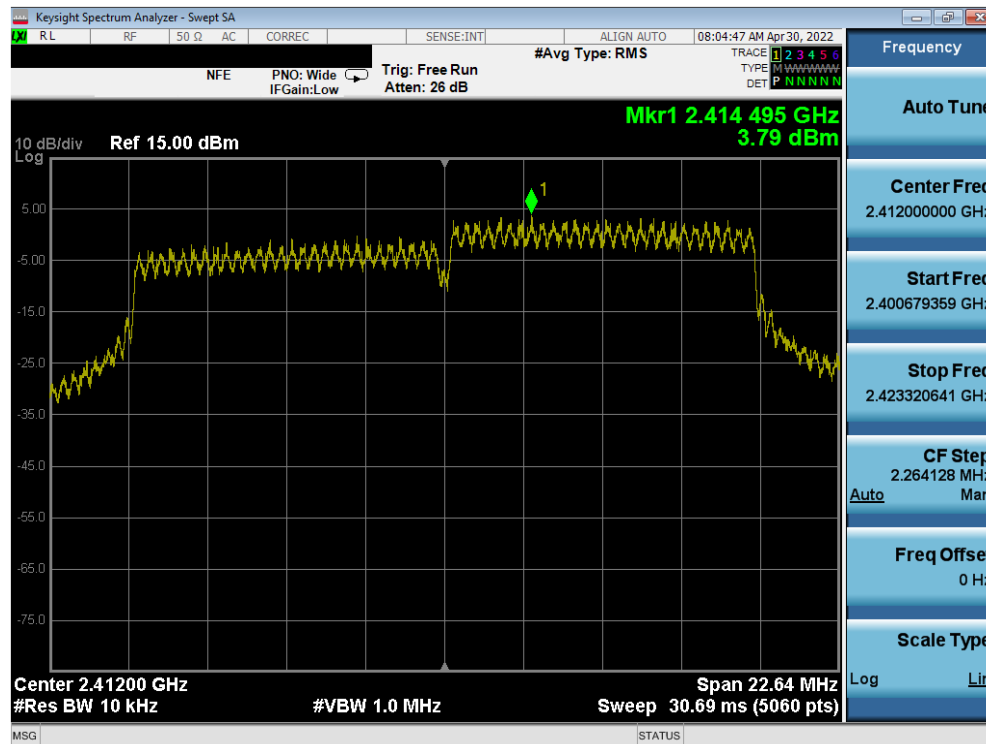

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 44 of 106

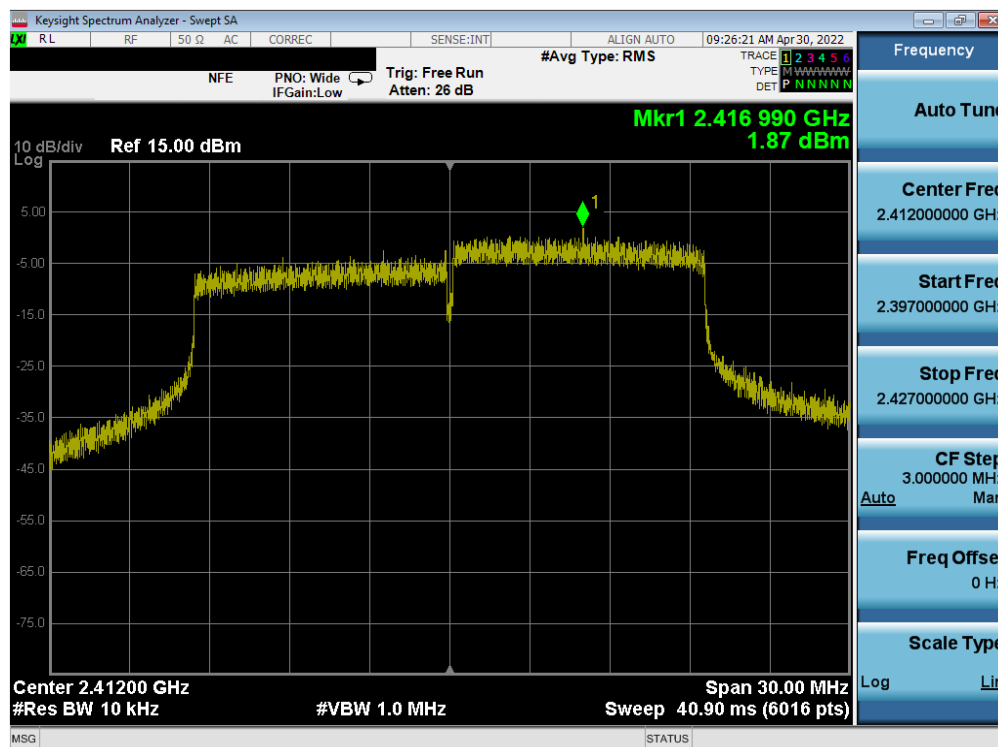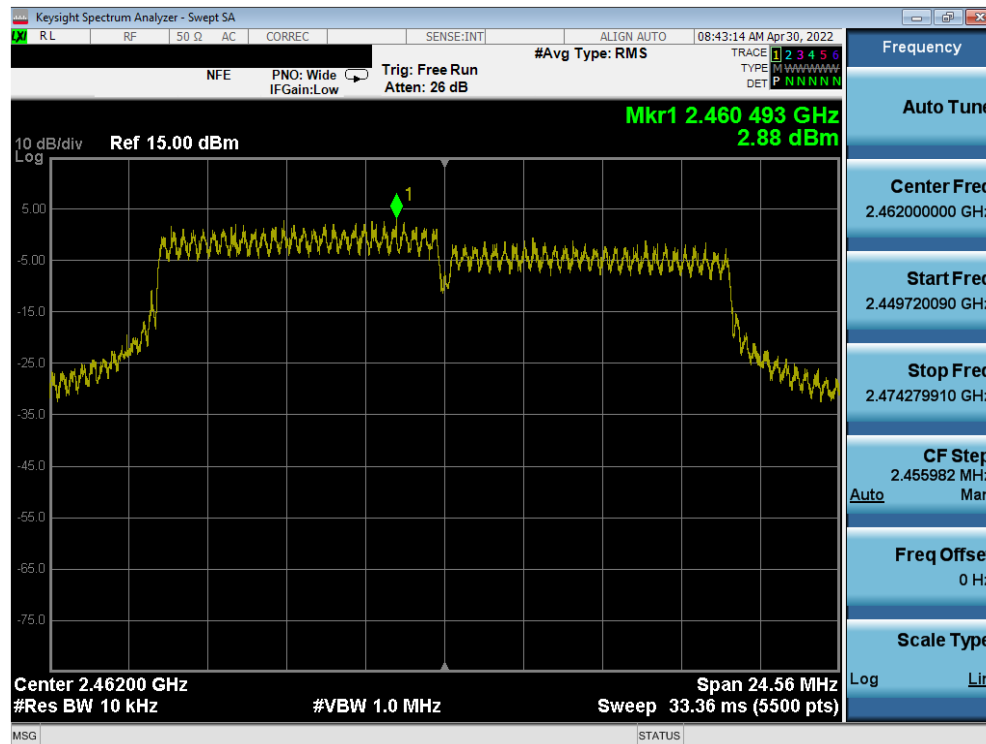

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 45 of 106

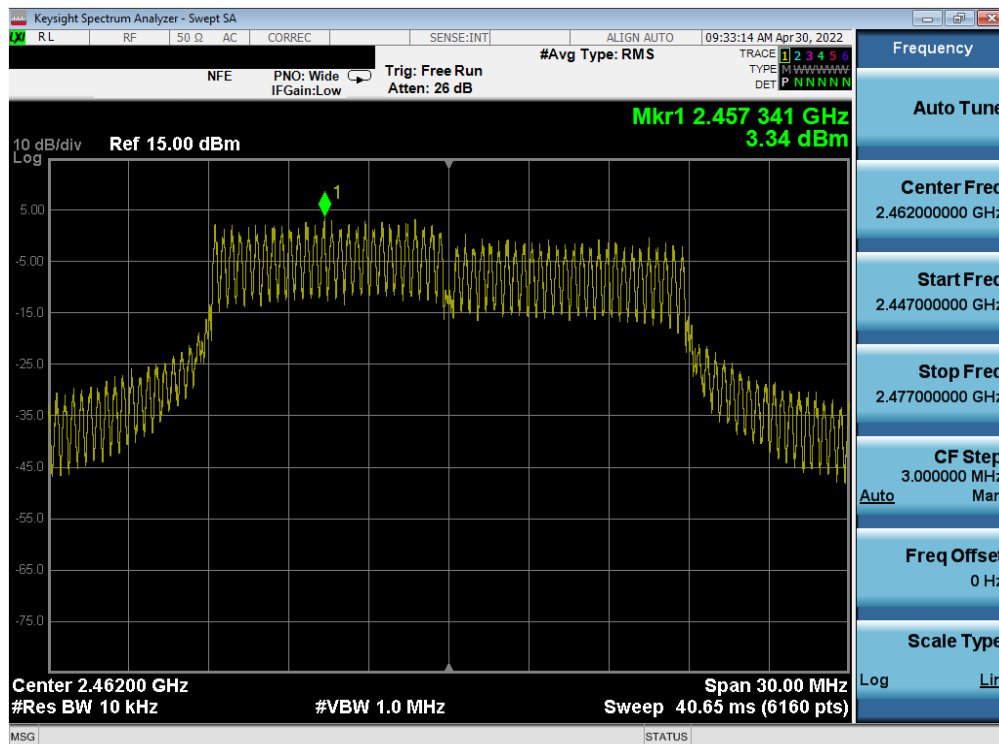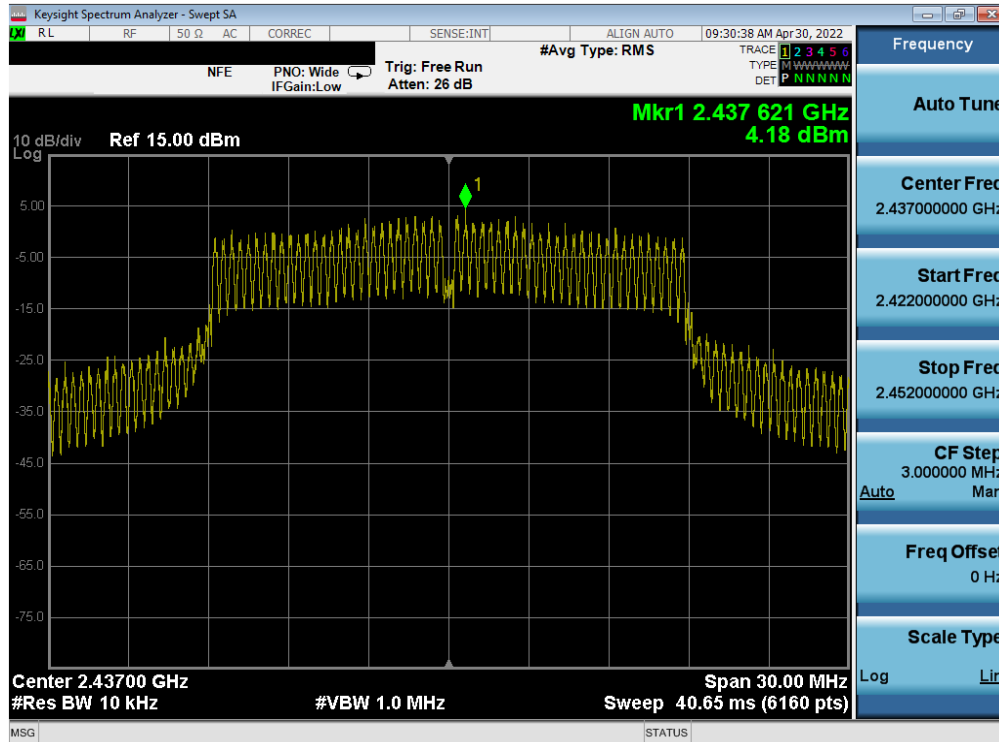

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 46 of 106

MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	g	6	3.51	3.95	6.74	8.00	-1.26	Pass
2437	6	g	6	3.18	3.22	6.21	8.00	-1.79	Pass
2462	11	g	6	4.38	4.37	7.39	8.00	-0.61	Pass
2412	1	n	6.5/7.2 (MCS0)	3.77	3.79	6.79	8.00	-1.21	Pass
2437	6	n	6.5/7.2 (MCS0)	3.07	3.93	6.53	8.00	-1.47	Pass
2462	11	n	6.5/7.2 (MCS0)	3.37	2.88	6.15	8.00	-1.85	Pass
2412	1	ax	6.5/7.2 (MCS0)	-4.50	1.87	2.77	8.00	-5.23	Pass
2437	6	ax	6.5/7.2 (MCS0)	-5.03	4.18	4.67	8.00	-3.33	Pass
2462	11	ax	6.5/7.2 (MCS0)	-5.23	3.34	3.90	8.00	-4.10	Pass

Table 7-11. MIMO Conducted Power Density Measurements

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be 3.77 dBm for Antenna 1 and 3.79 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(3.77 \text{ dBm} + 3.79 \text{ dBm}) = (2.38 \text{ mW} + 2.39 \text{ mW}) = 4.77 \text{ mW} = 6.79 \text{ dBm}$$

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 47 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode, and 8.6Mbps for “ax” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 48 of 106


V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 Conducted Emissions at the Band Edge

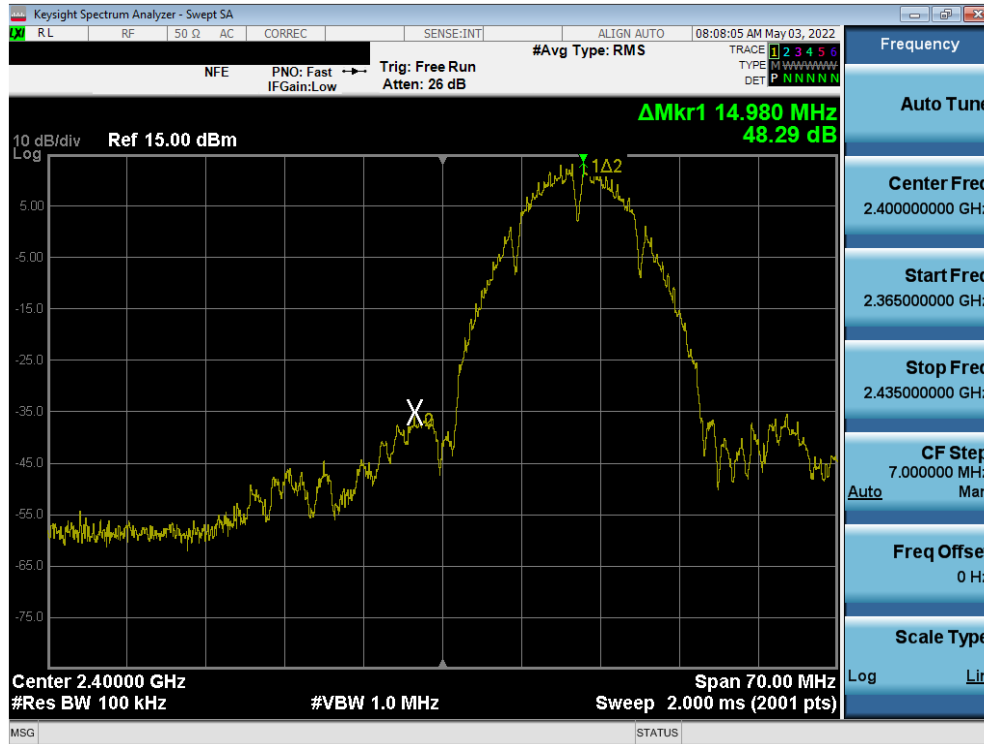


Plot 7-49. Band Edge Plot SISO ANT1 (802.11b – Ch. 1)

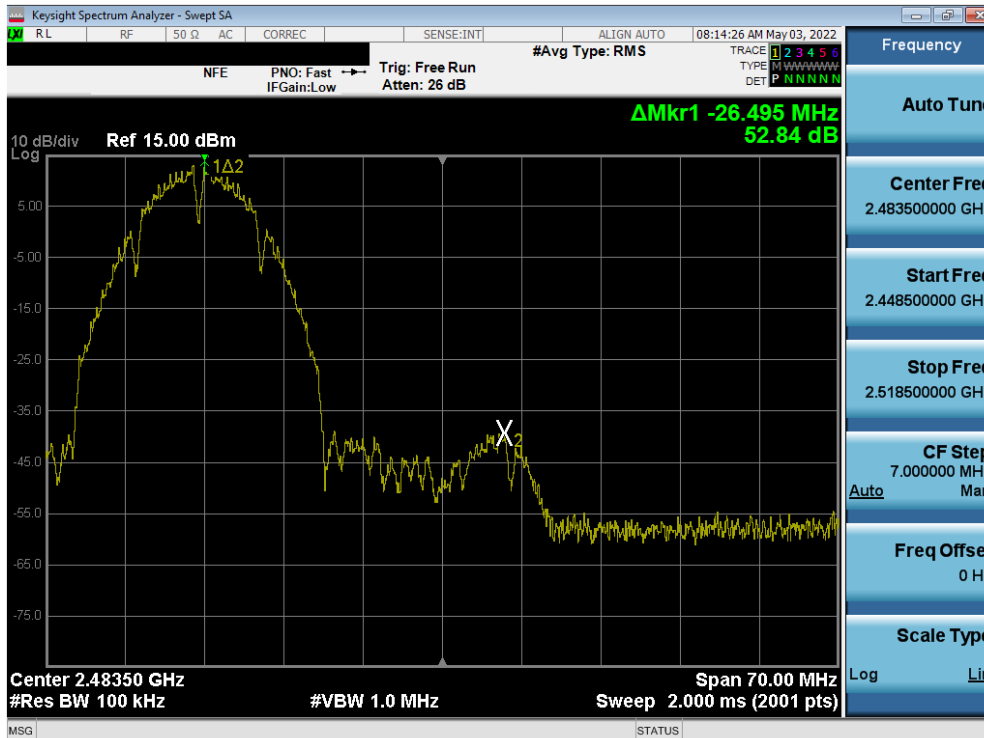


Plot 7-50. Band Edge Plot SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 49 of 106

V9.0 02/01/2019

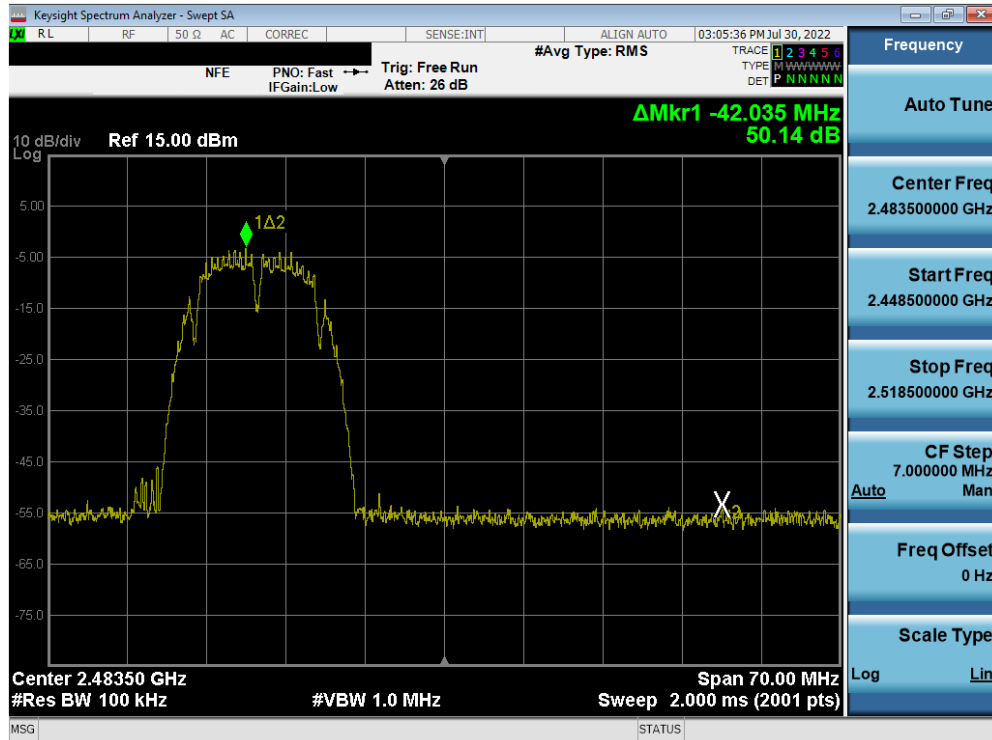


Plot 7-51. Band Edge Plot SISO ANT1 (802.11b – Ch. 12)

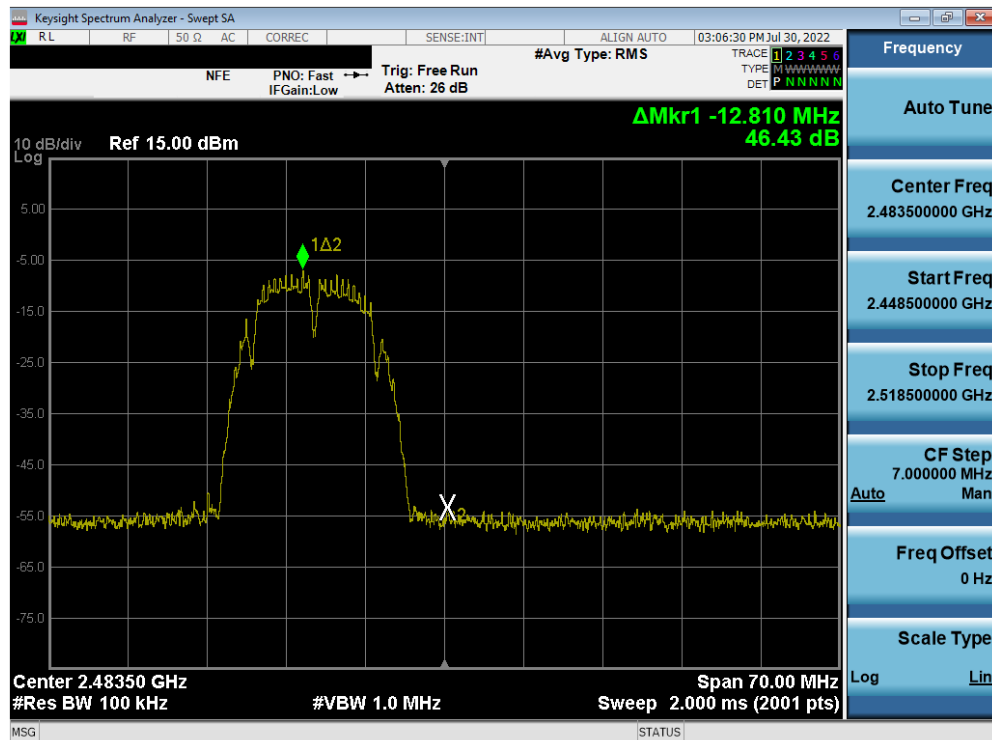


Plot 7-52. Band Edge Plot SISO ANT1 (802.11b – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 50 of 106

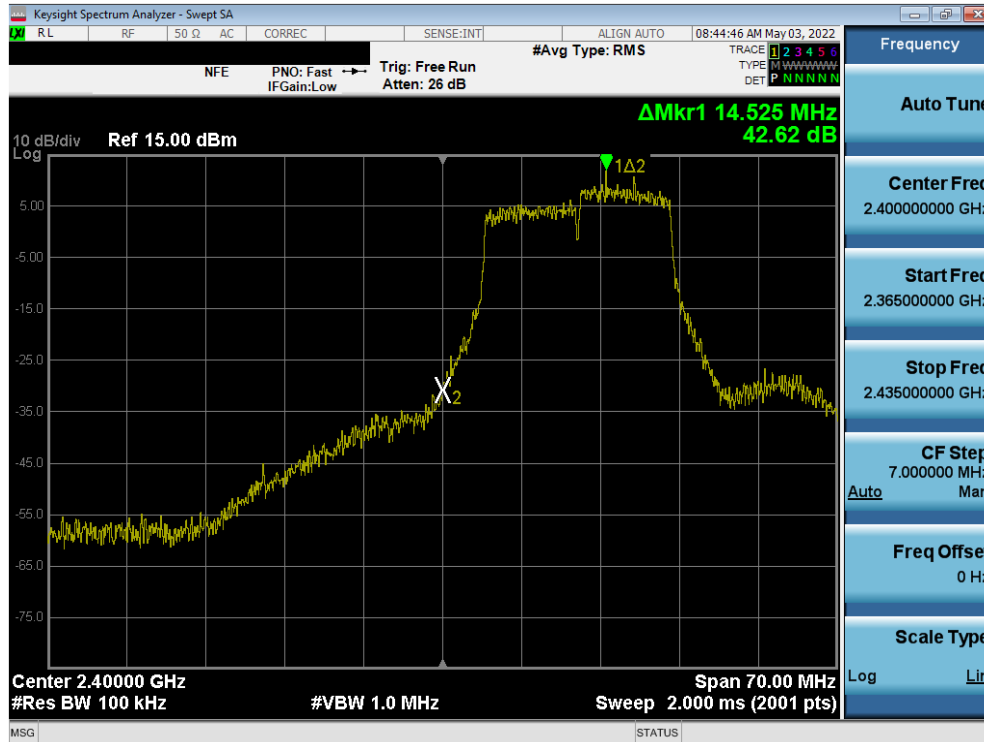


Plot 7-53. Band Edge Plot SISO ANT1 (802.11g- Ch. 1)

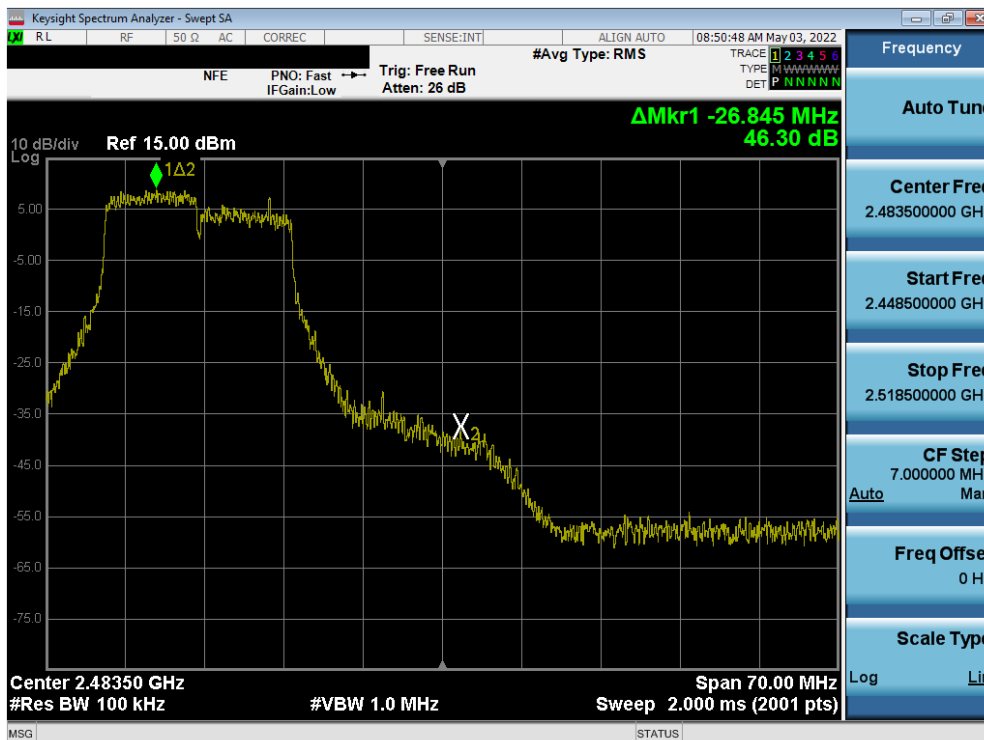


Plot 7-54. Band Edge Plot SISO ANT1 (802.11g - Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 51 of 106

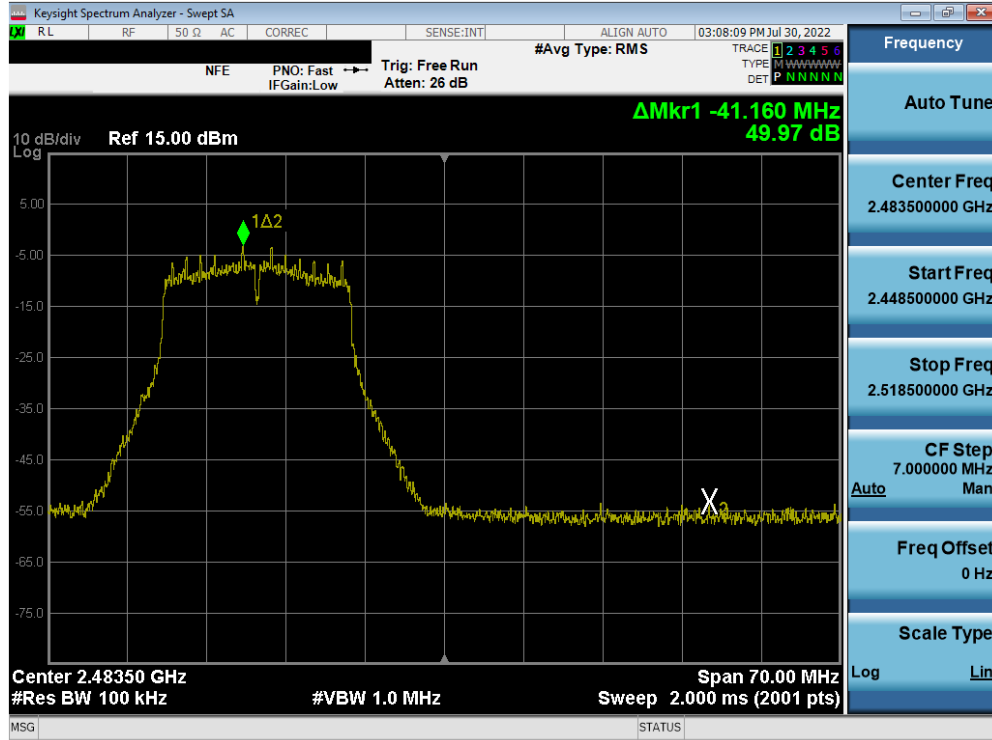


Plot 7-55. Band Edge Plot SISO ANT1 (802.11g – Ch. 12)

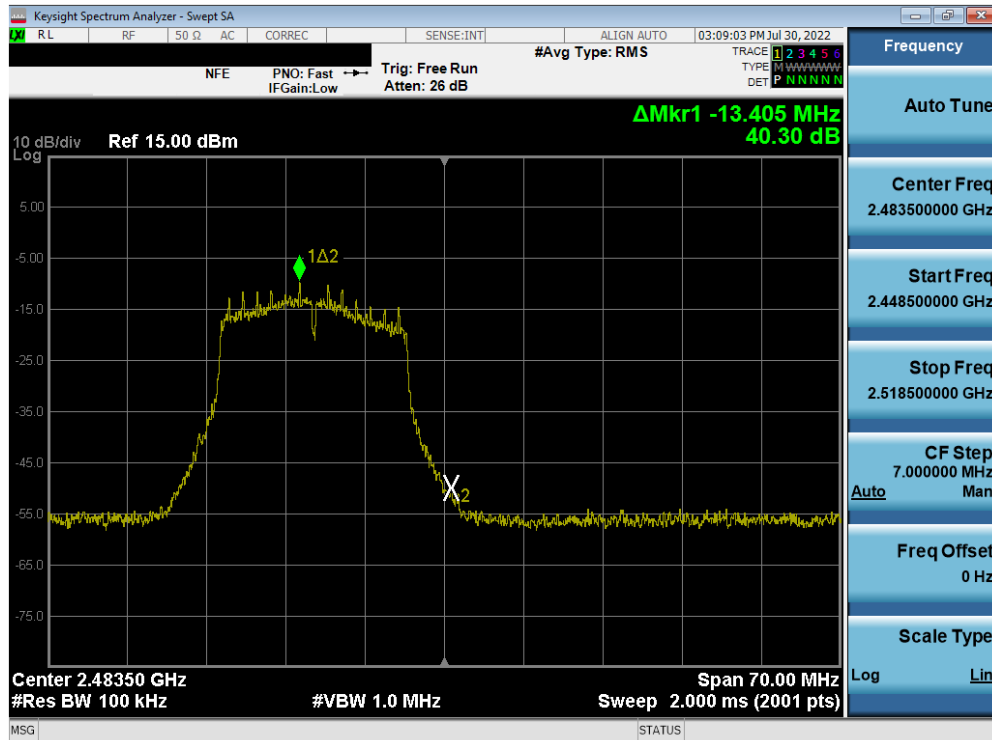


Plot 7-56. Band Edge Plot SISO ANT1 (802.11g – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 52 of 106

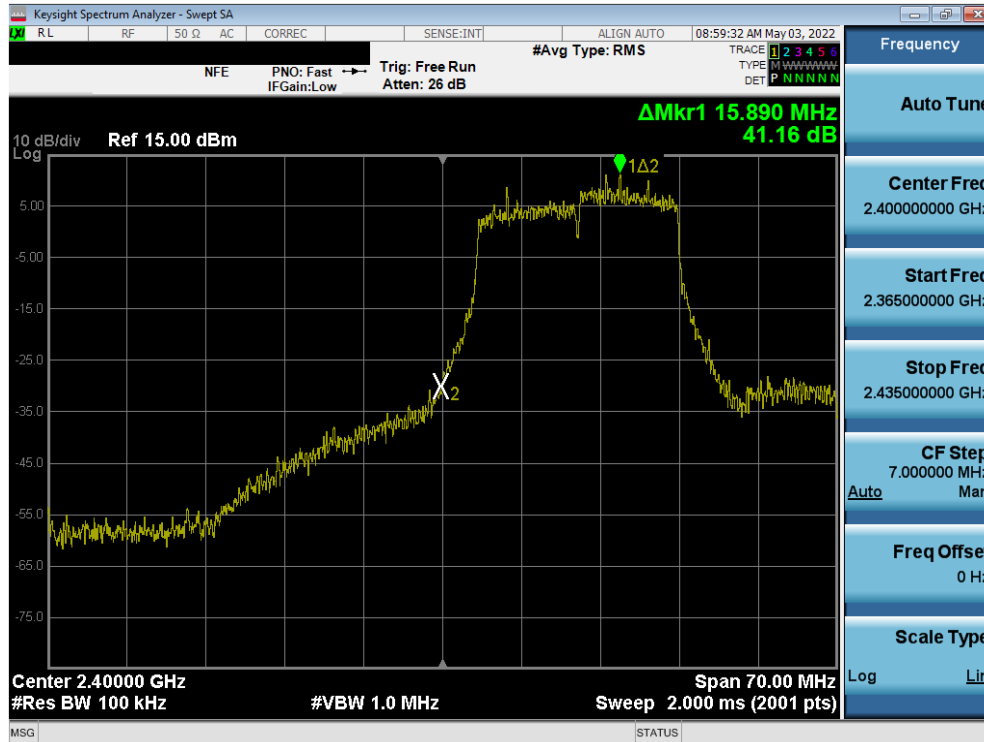

Plot 7-57. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

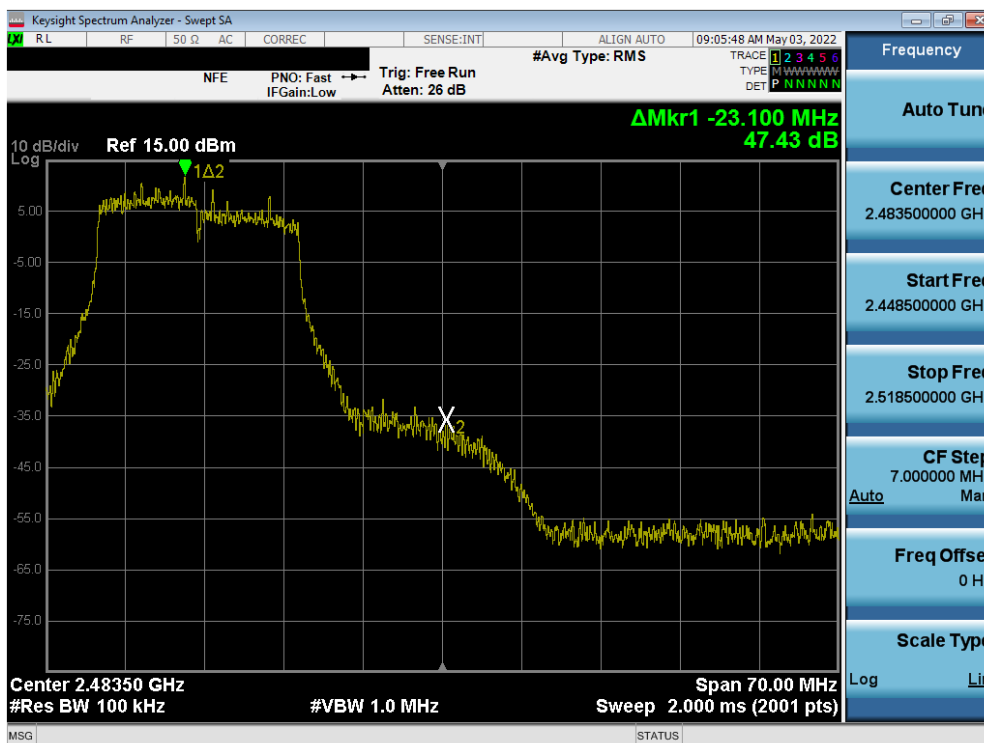


Plot 7-58. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 53 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

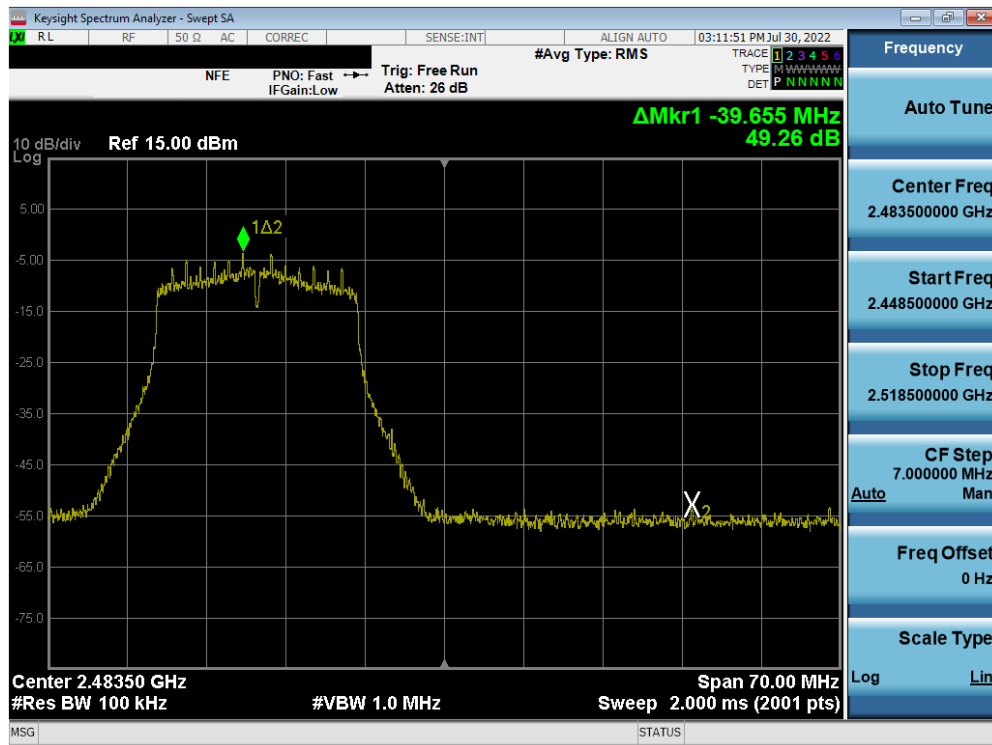


Plot 7-59. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 12)

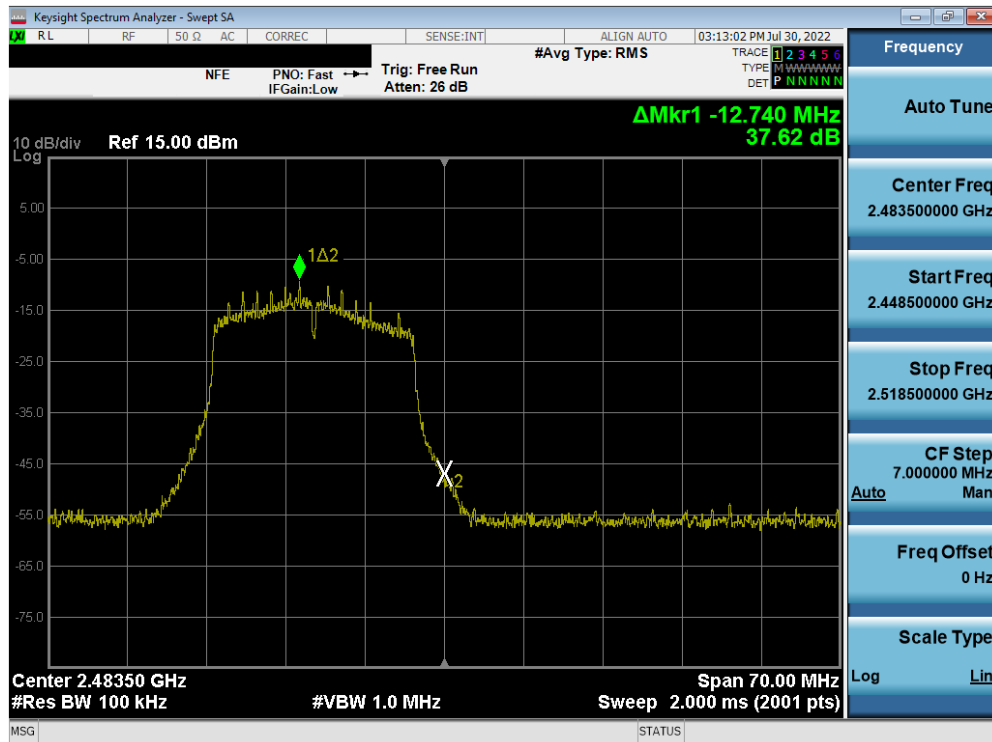


Plot 7-60. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 54 of 106

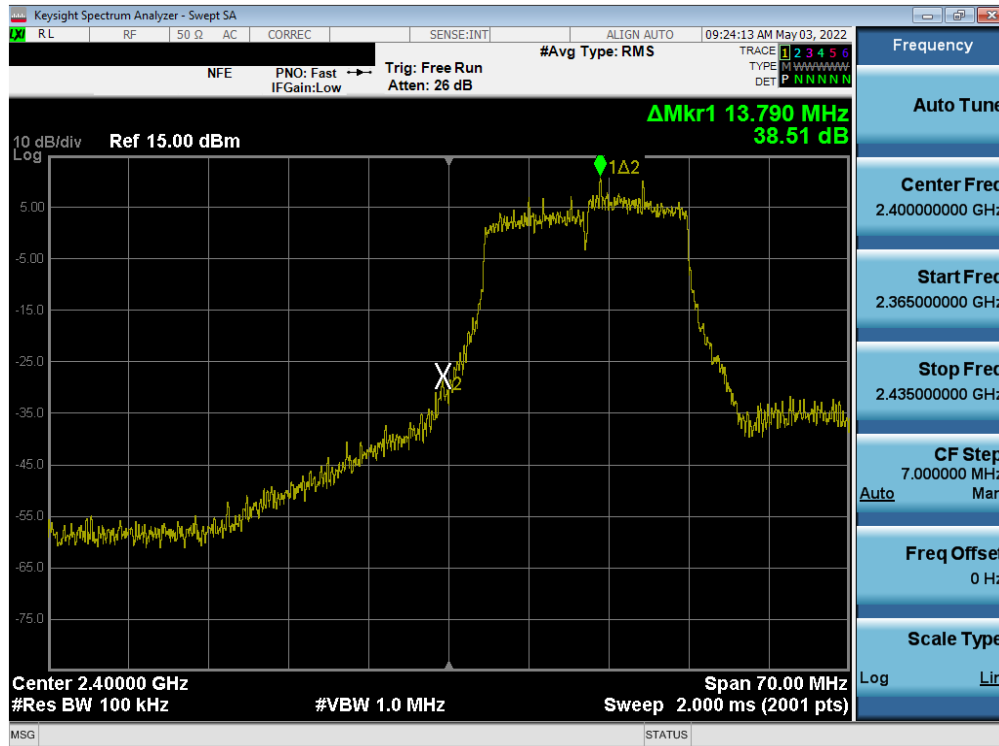


Plot 7-61. Band Edge Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 1)

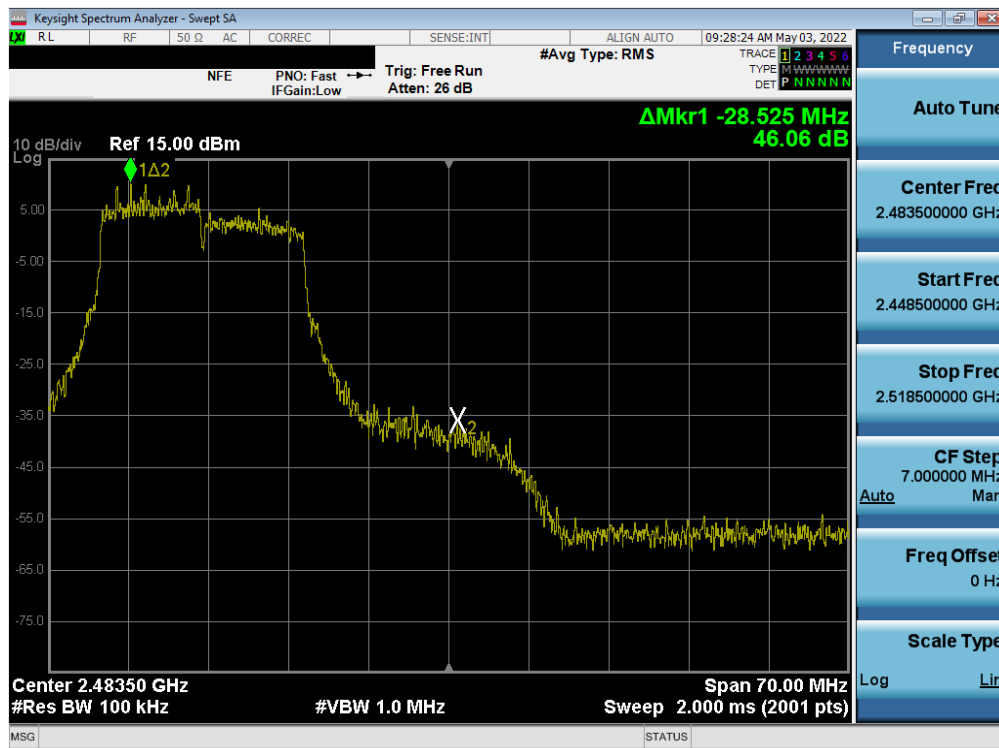


Plot 7-62. Band Edge Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 55 of 106

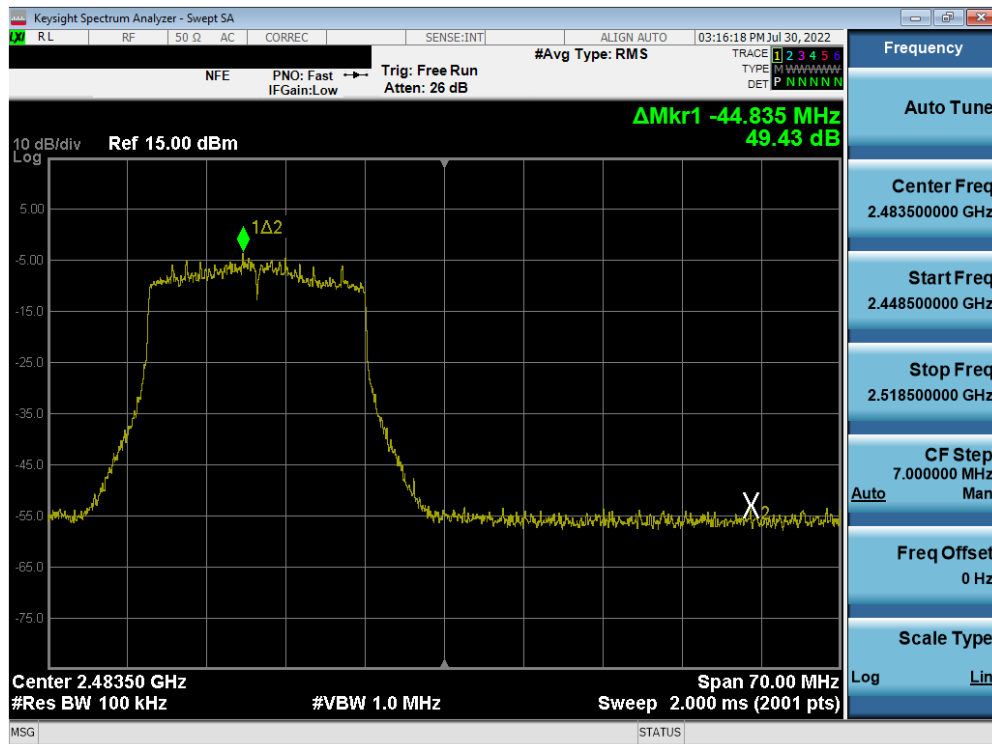


Plot 7-63. Band Edge Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 12)

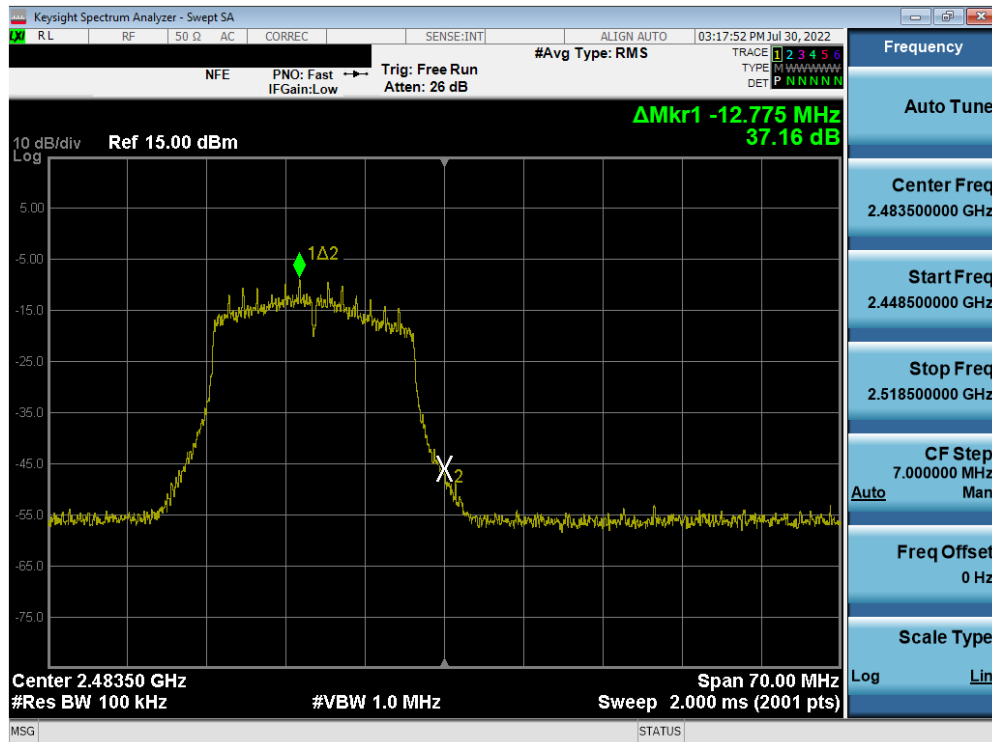


Plot 7-64. Band Edge Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 56 of 106

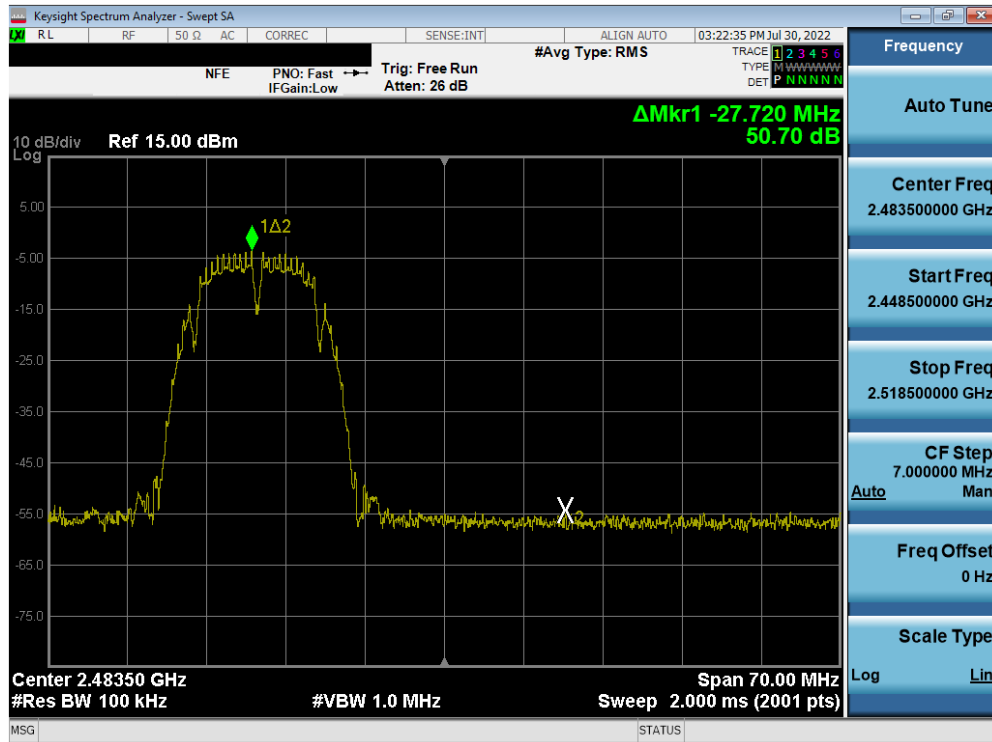

Plot 7-67. Band Edge Plot SISO ANT2 (802.11b – Ch. 12)

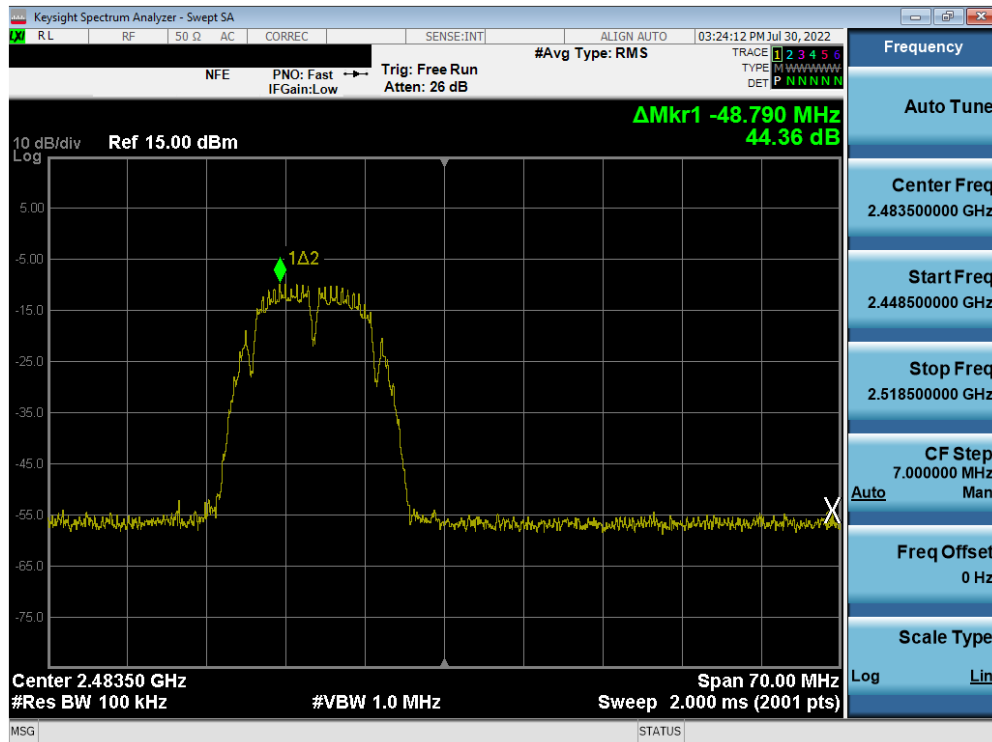


Plot 7-68. Band Edge Plot SISO ANT2 (802.11b – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 58 of 106




Plot 7-69. Band Edge Plot SISO ANT2 (802.11g- Ch. 1)

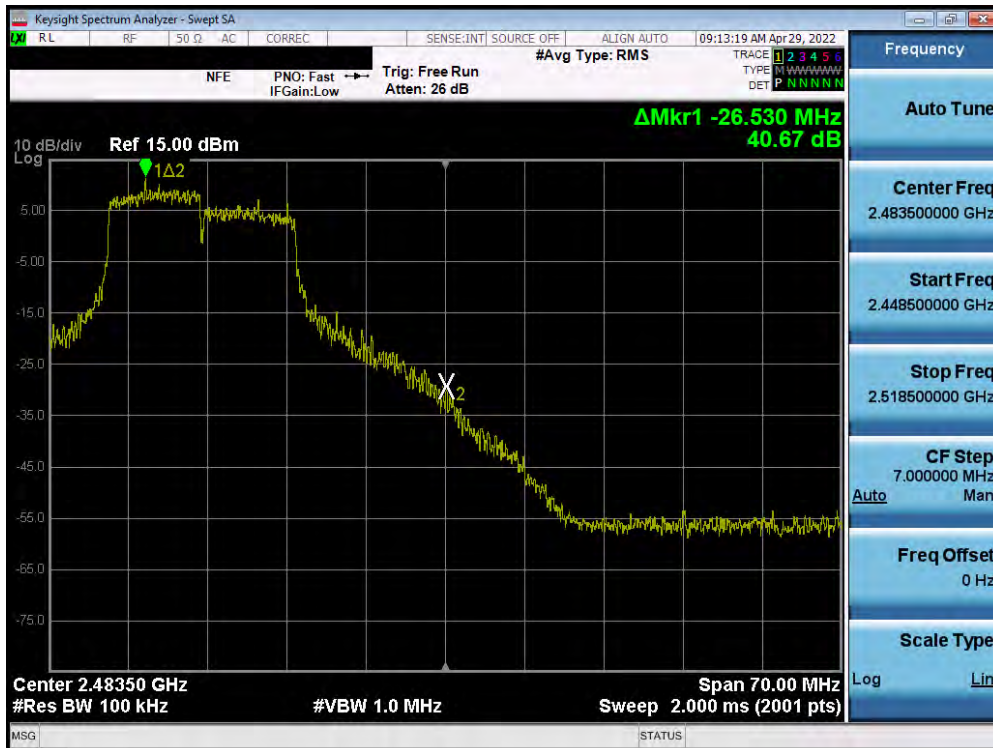


Plot 7-70. Band Edge Plot SISO ANT2 (802.11g - Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 59 of 106

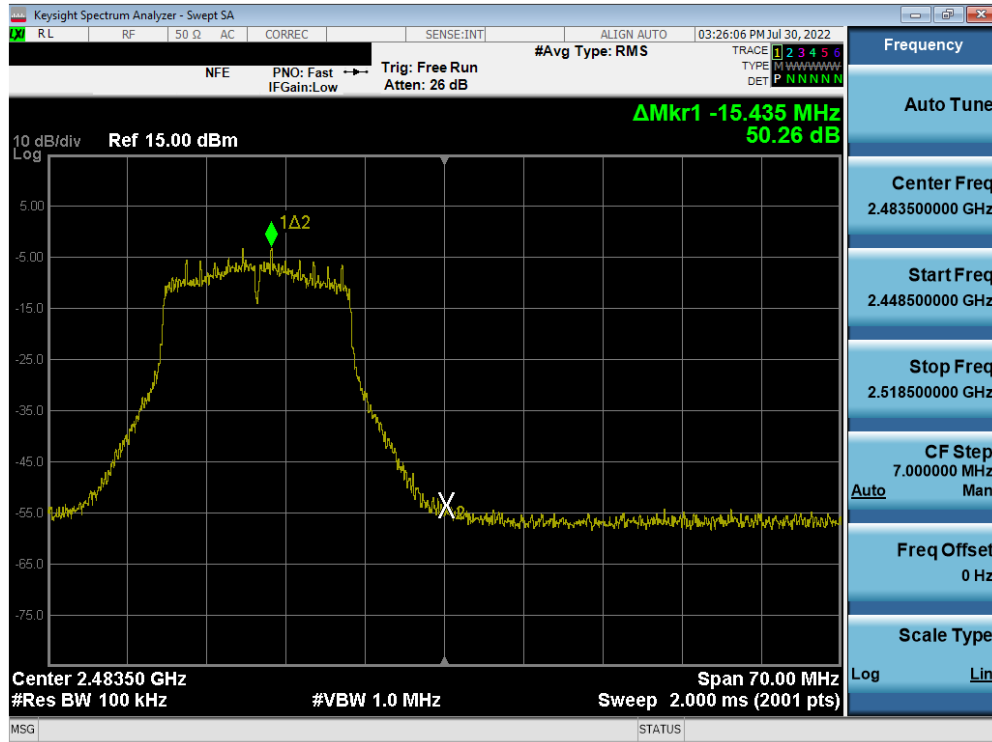


Plot 7-71. Band Edge Plot SISO ANT2 (802.11g – Ch. 12)

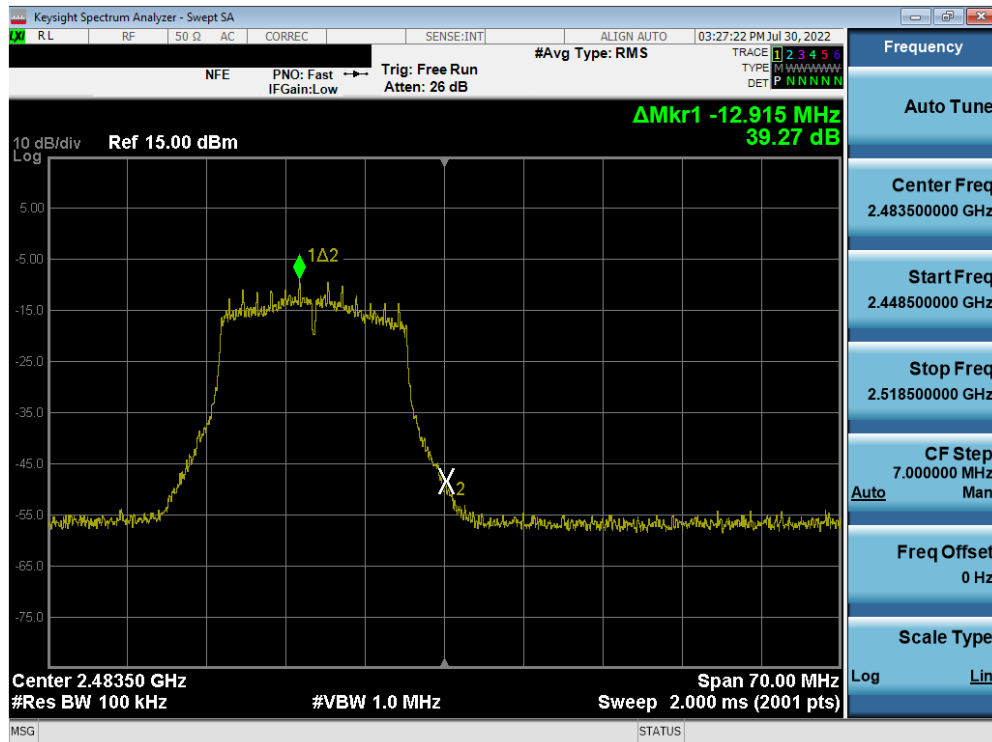


Plot 7-72. Band Edge Plot SISO ANT2 (802.11g – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 60 of 106

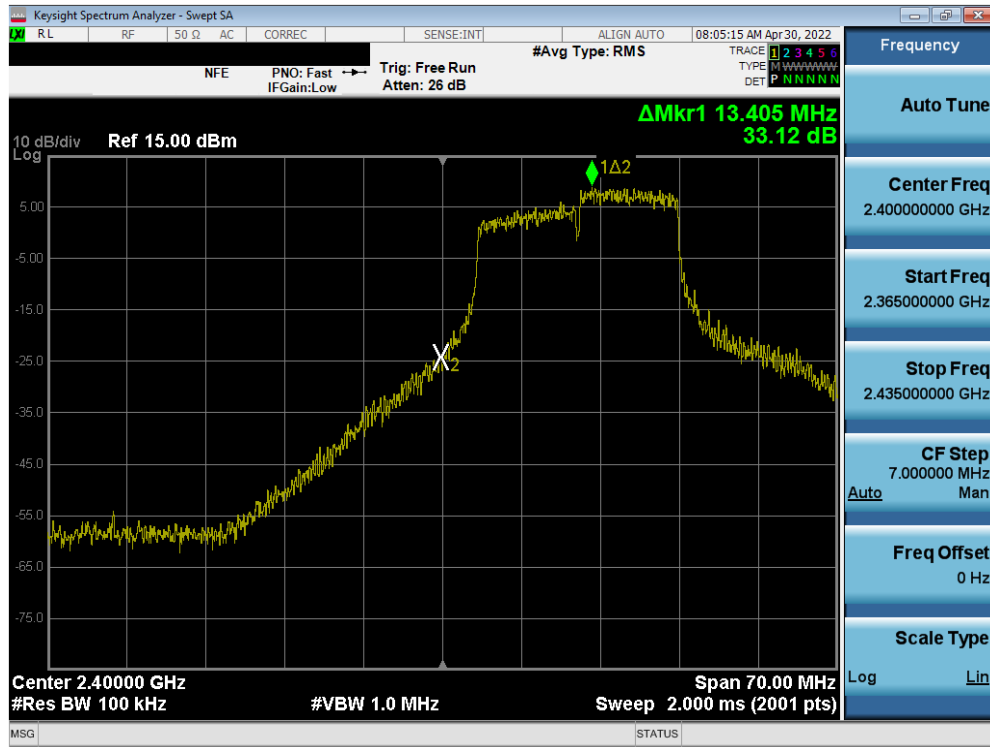


Plot 7-73. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

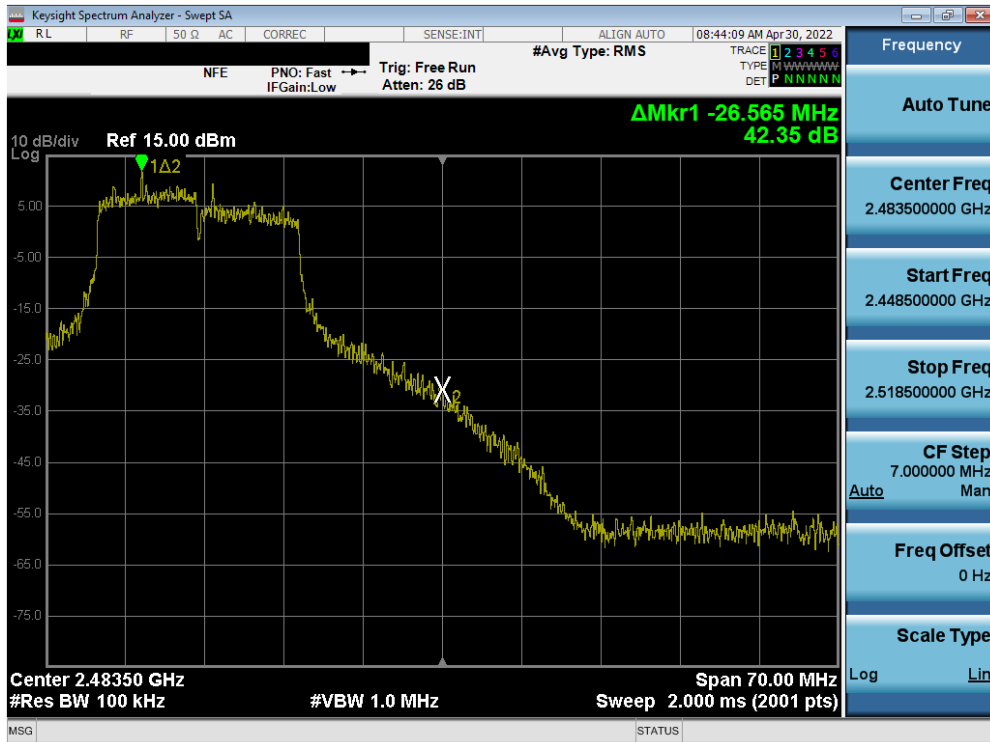


Plot 7-74. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 61 of 106

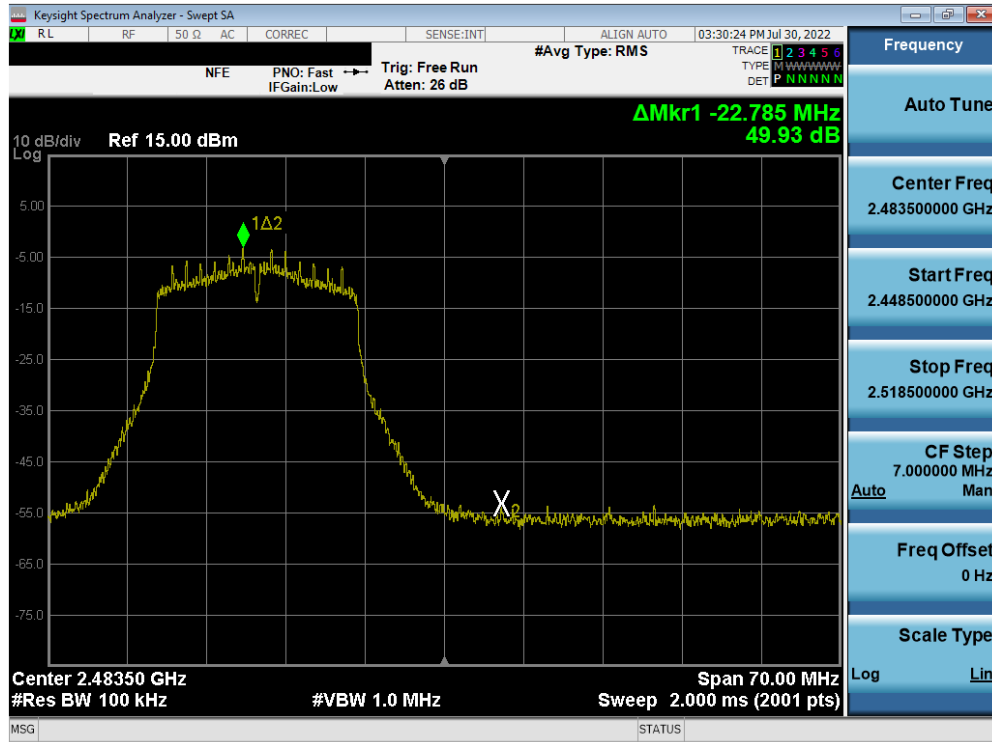


Plot 7-75. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 12)

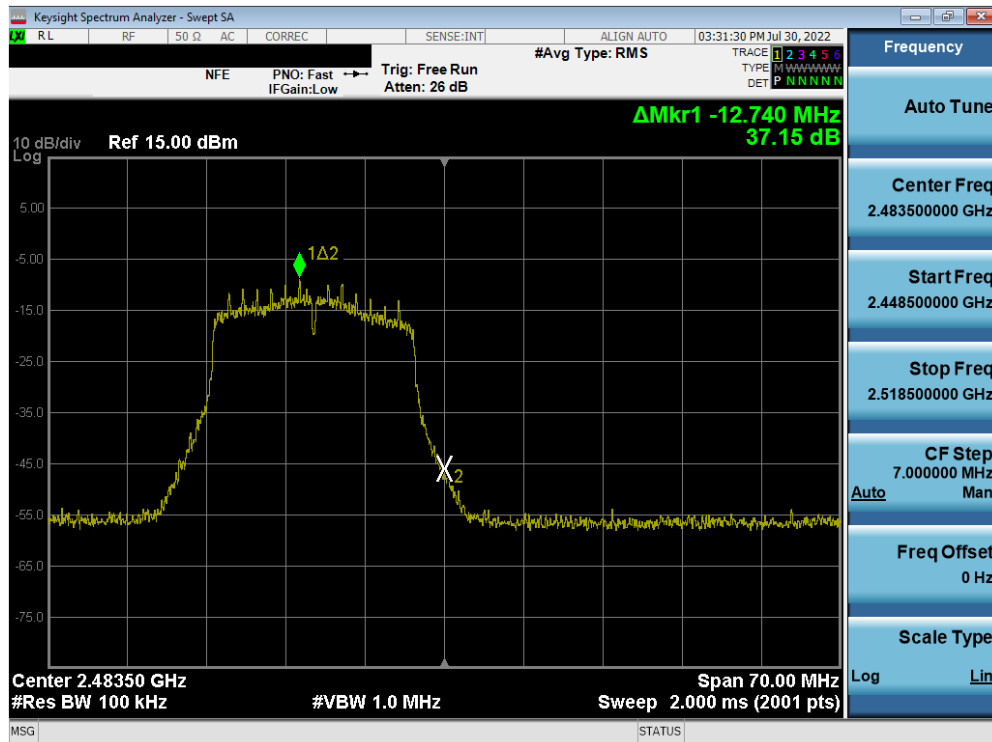


Plot 7-76. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 62 of 106

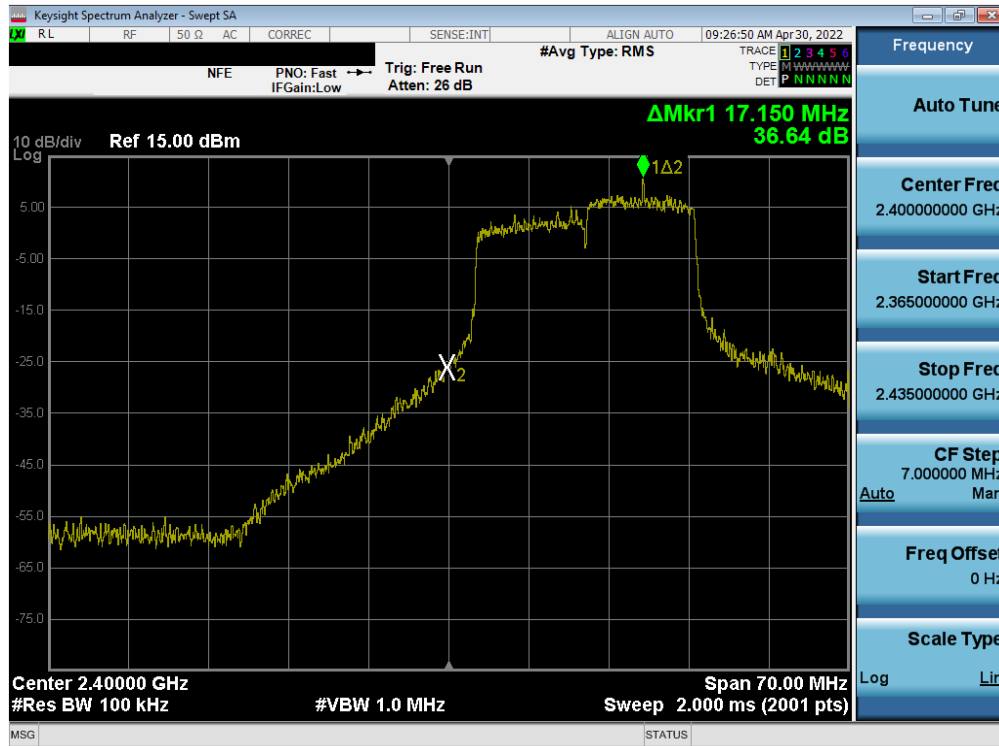


Plot 7-77. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 1)

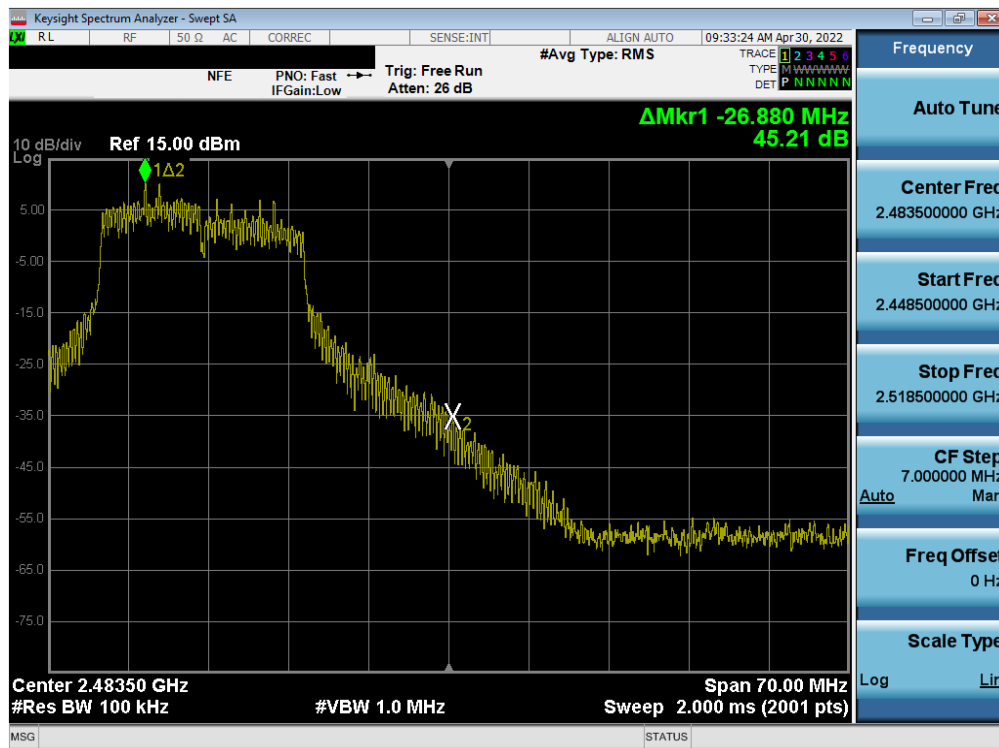


Plot 7-78. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 63 of 106

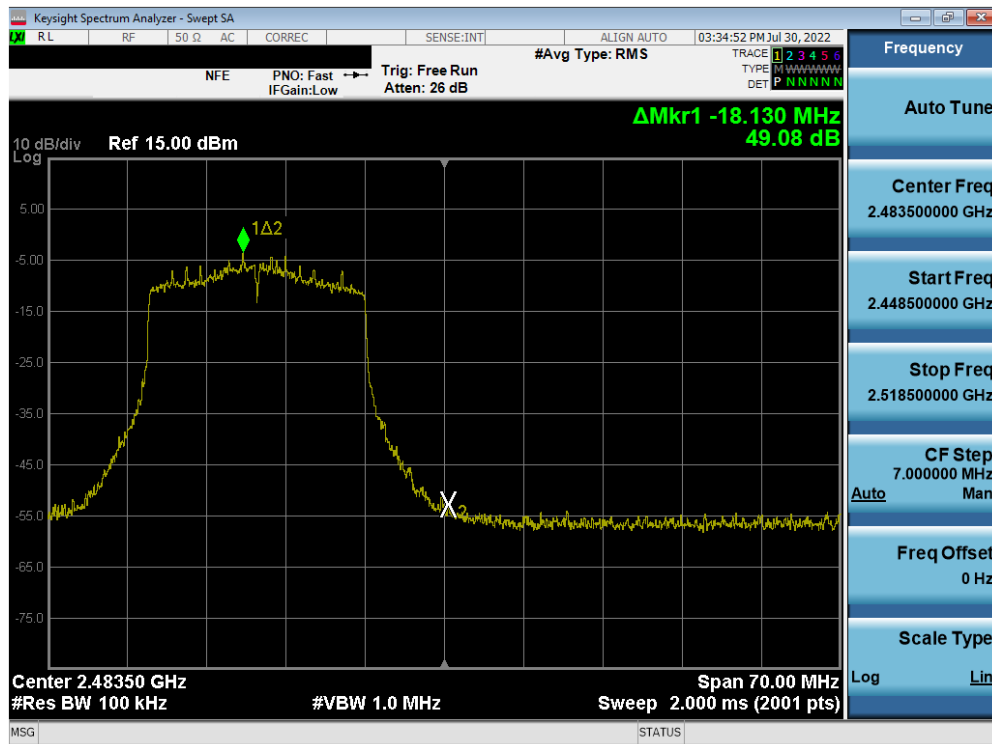

Plot 7-79. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 12)

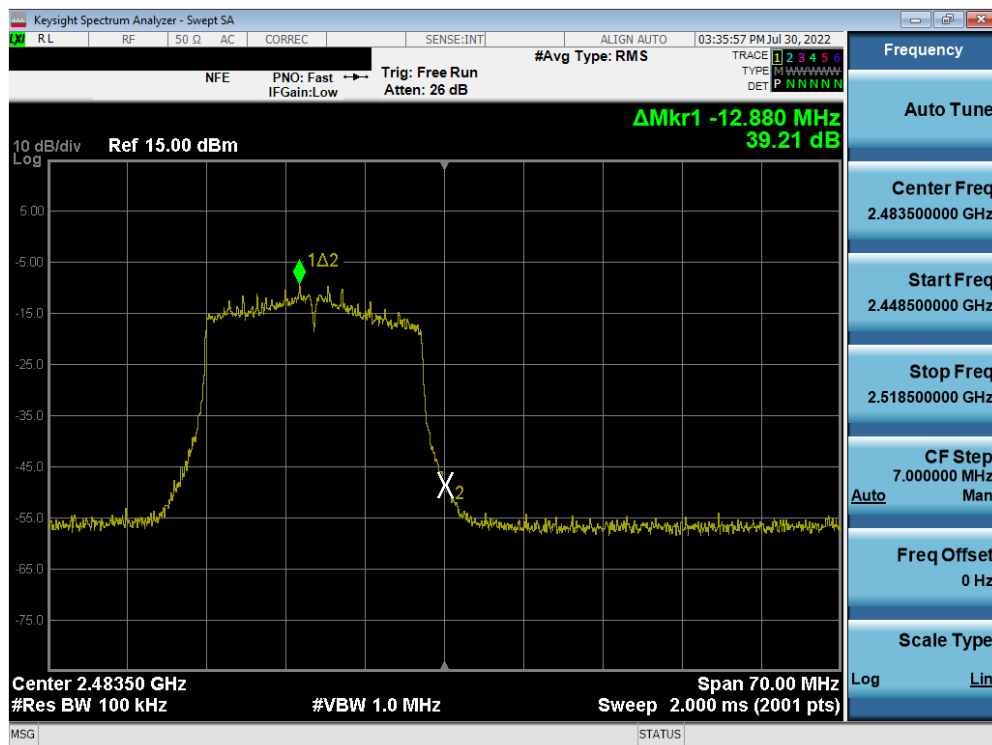

Plot 7-80. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 13)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 64 of 106

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n”, “ax” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5
ANSI C63.10-2013 – Section 14.3.3
KDB 662911 D01 v02r01 – Section E)3)b)

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 65 of 106

V9.0 02/01/2019


Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 66 of 106

V9.0 02/01/2019

SISO Antenna-1 Conducted Spurious Emission

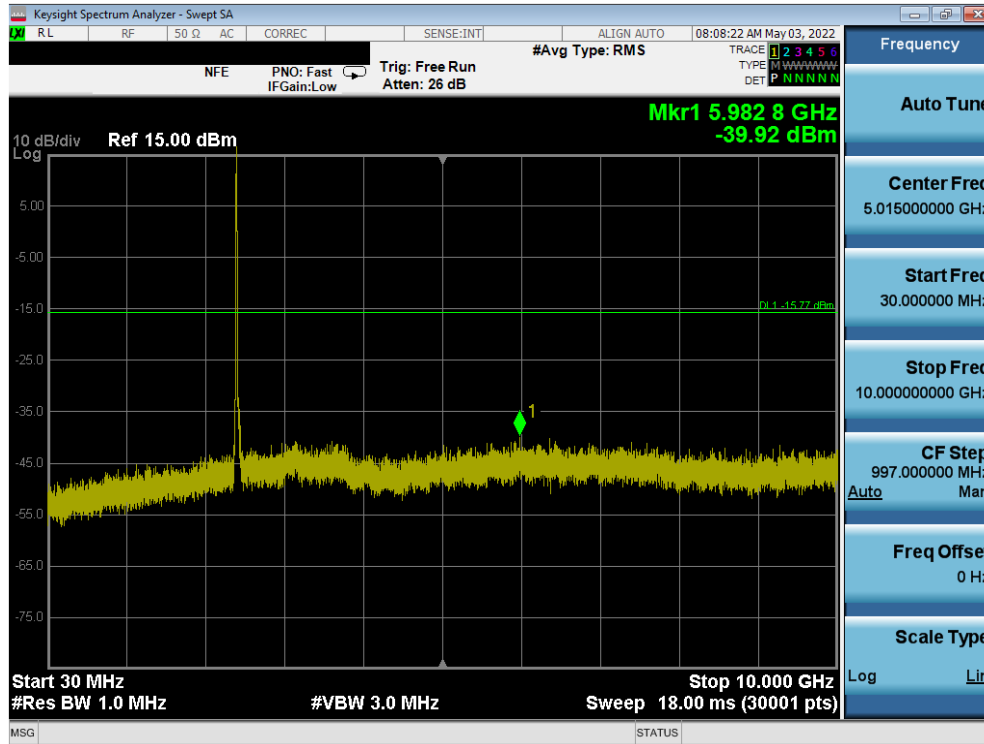

Plot 7-81. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 1)

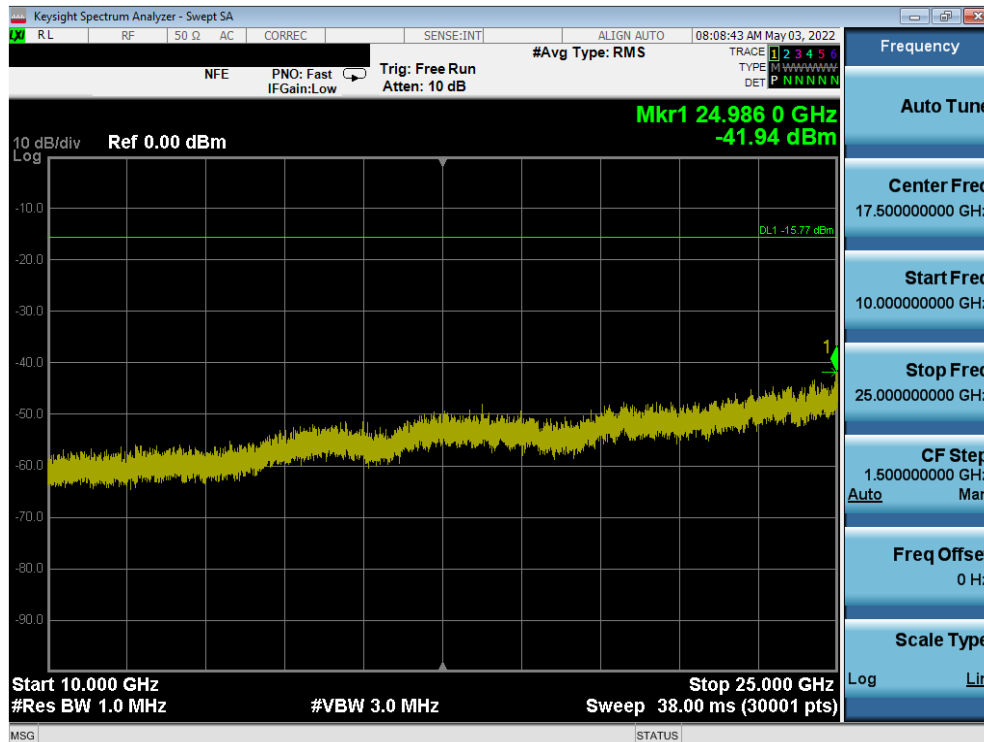


Plot 7-82. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 1)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 67 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

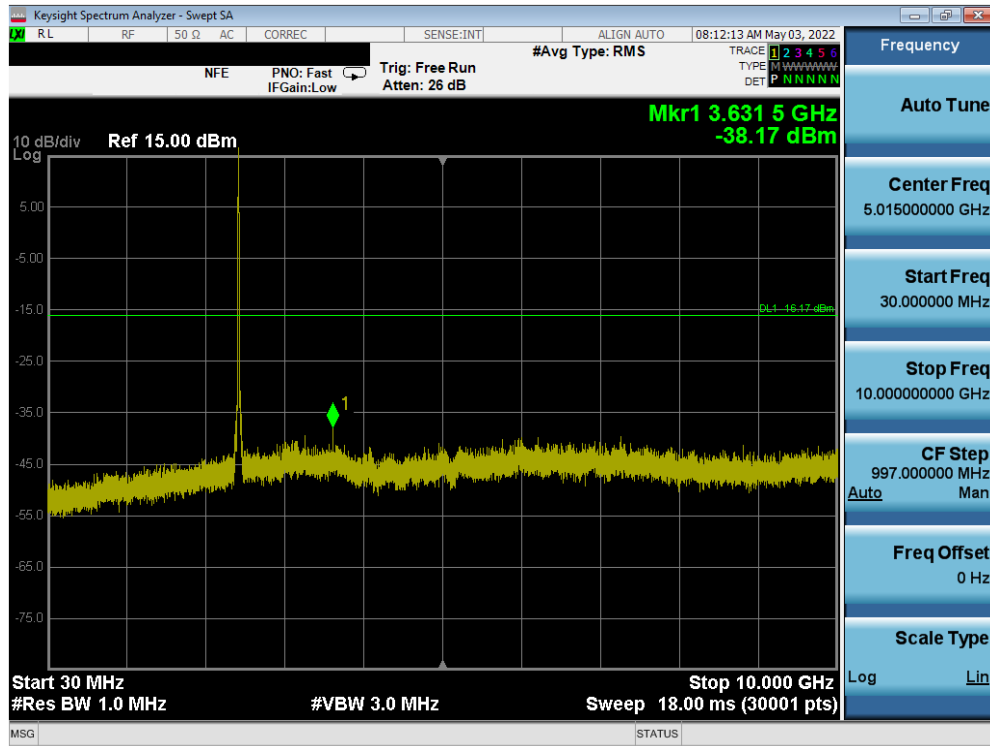


Plot 7-83. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

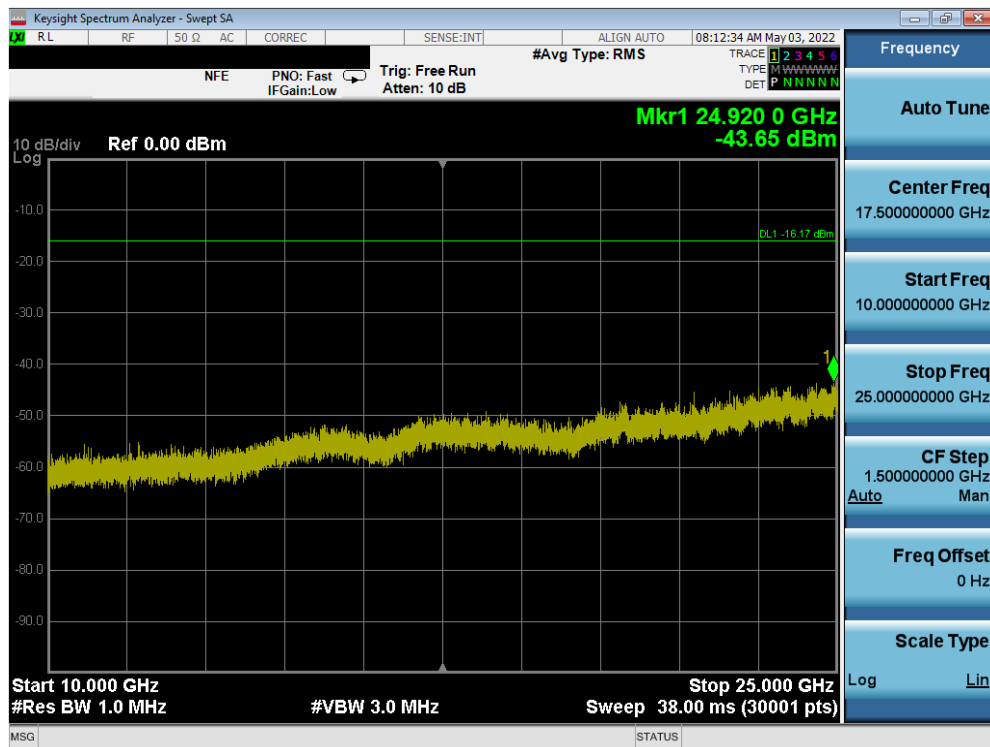


Plot 7-84. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 68 of 106

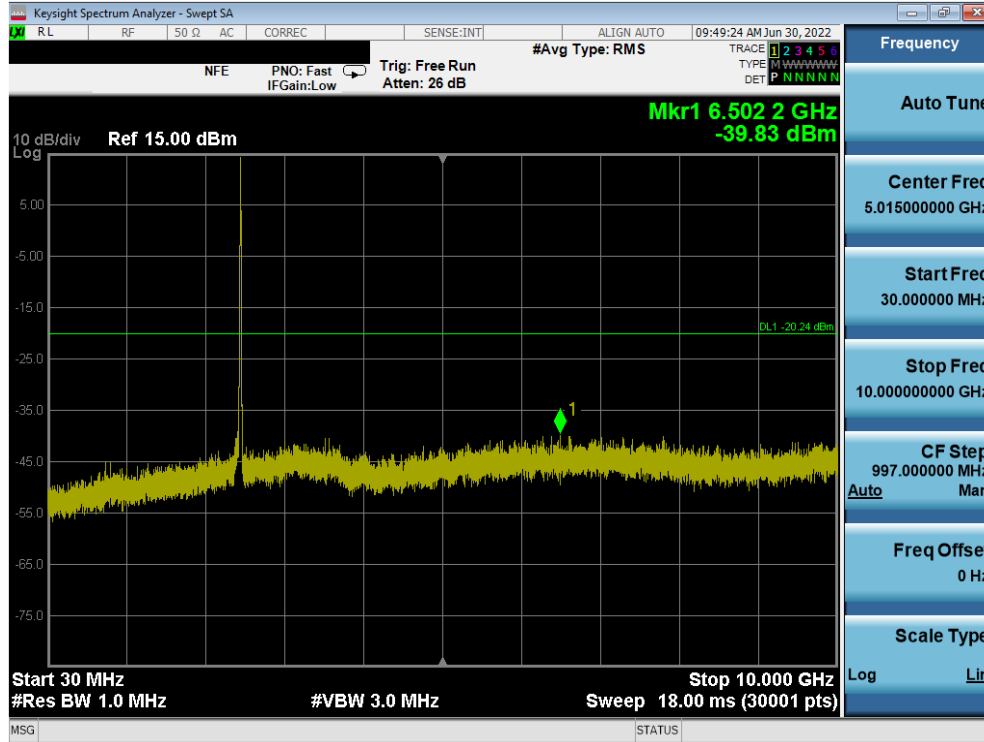


Plot 7-85. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

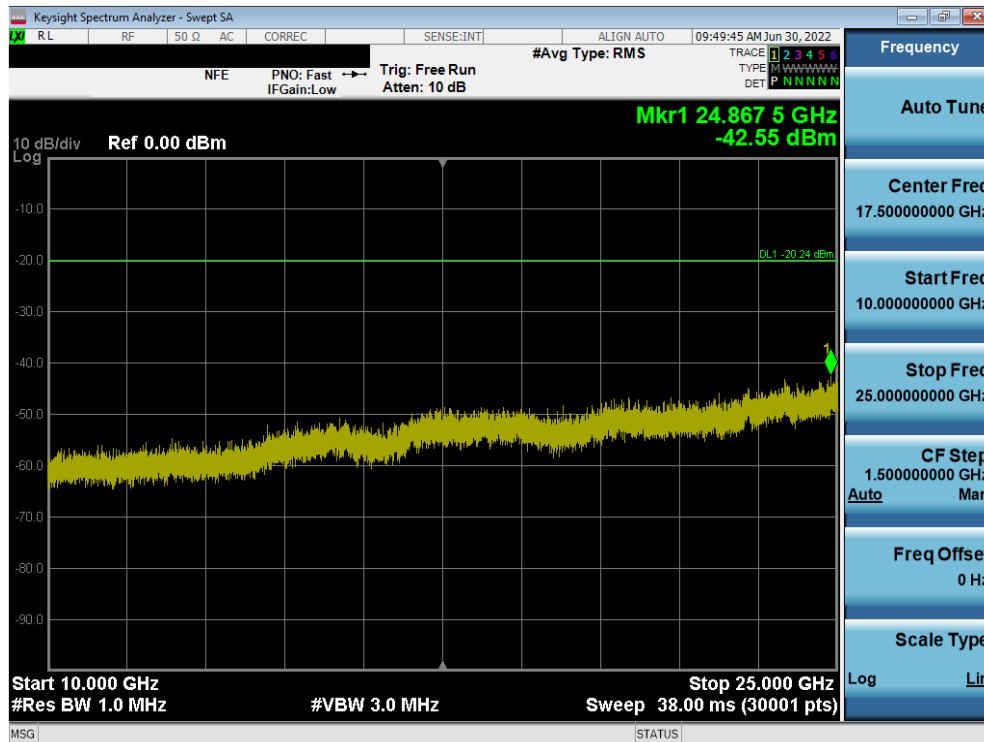


Plot 7-86. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 69 of 106

SISO Antenna-2 Conducted Spurious Emissions

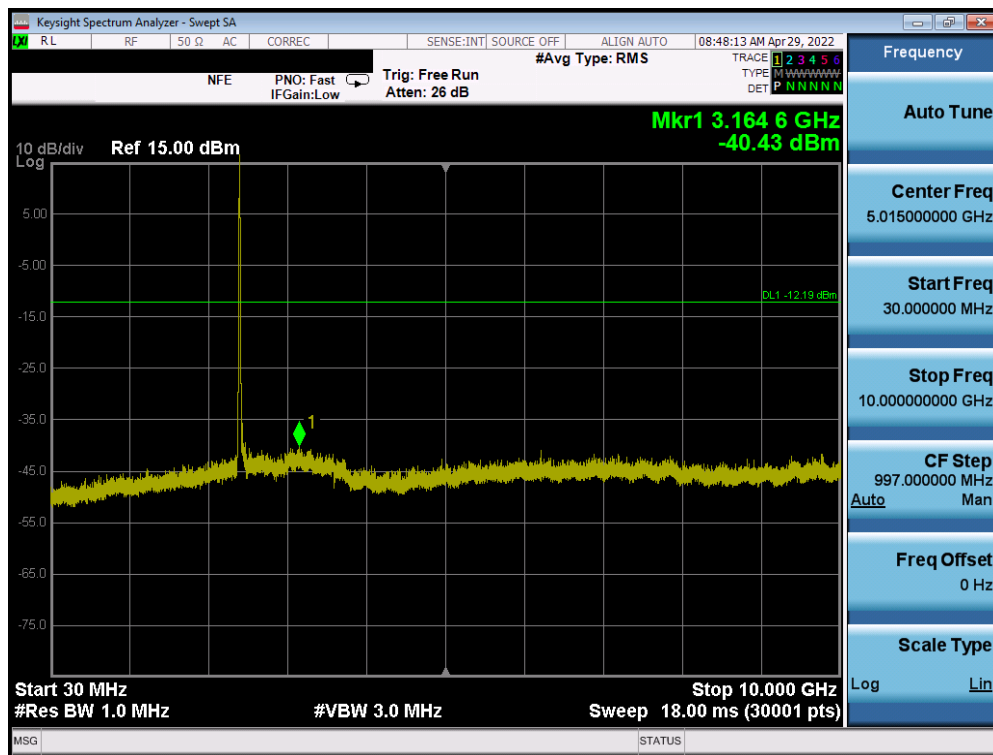



Plot 7-87. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

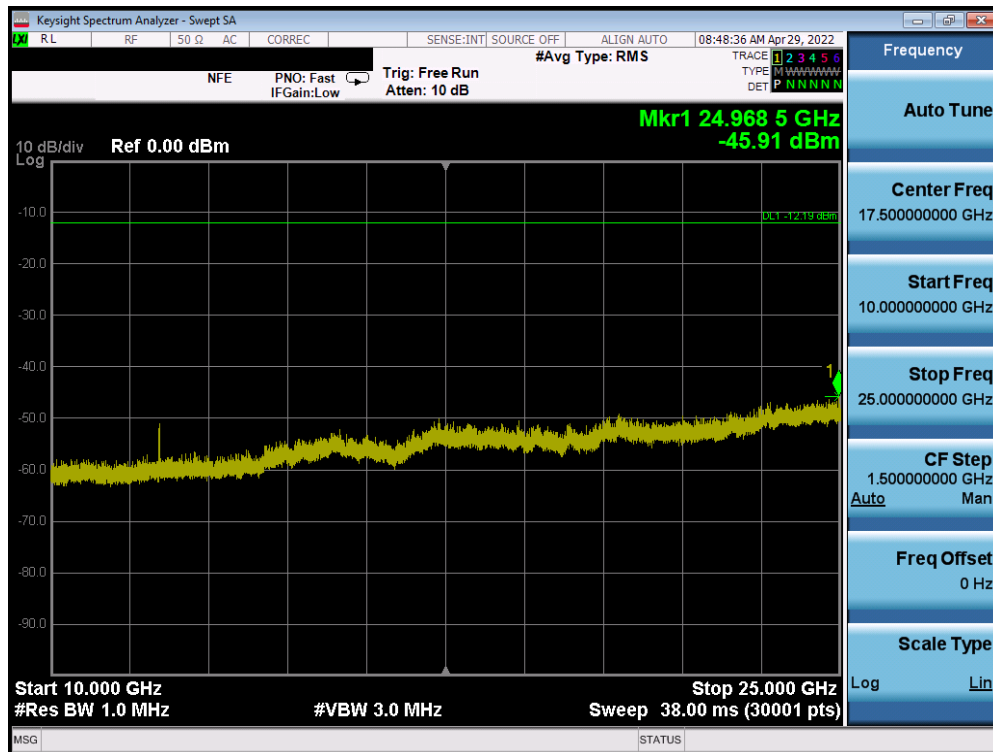


Plot 7-88. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 70 of 106

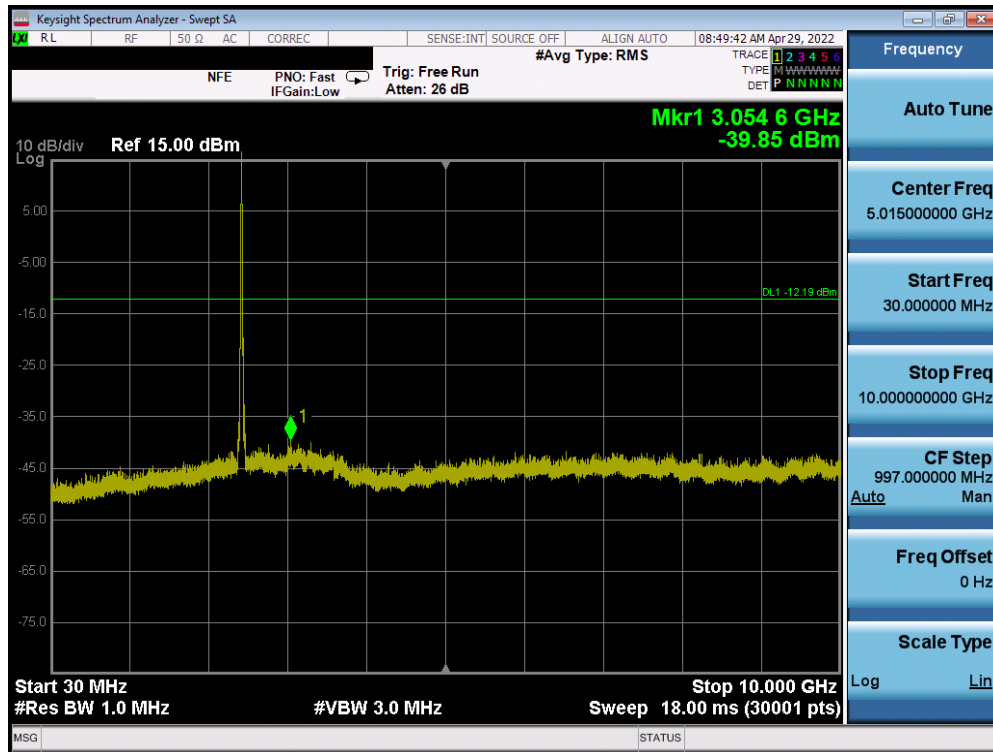

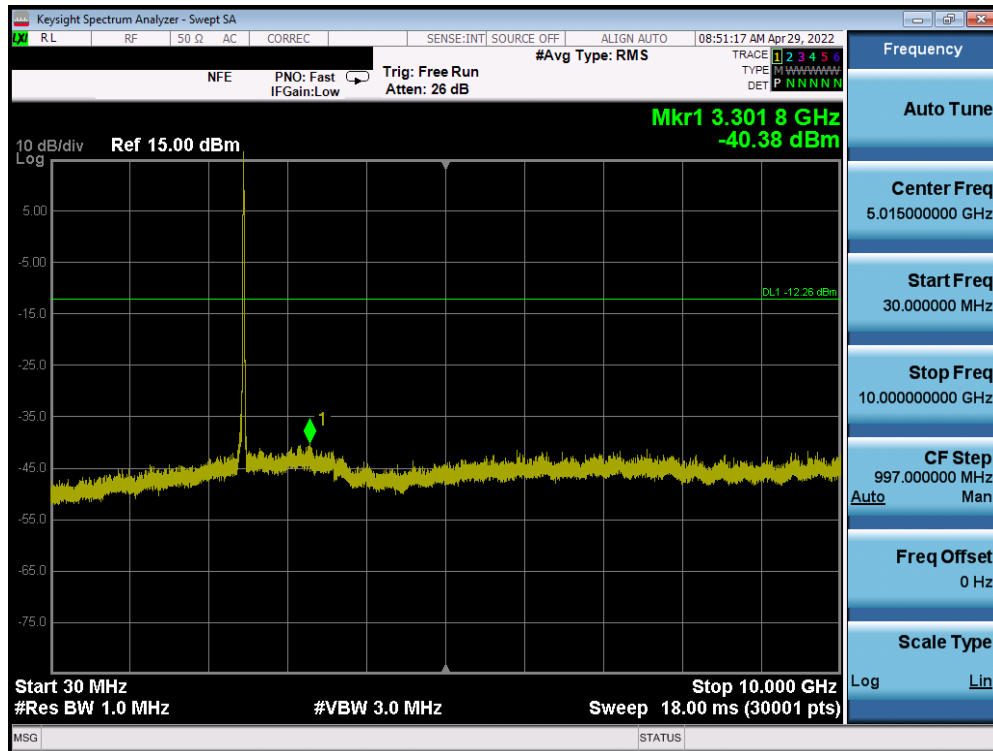

Plot 7-91. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

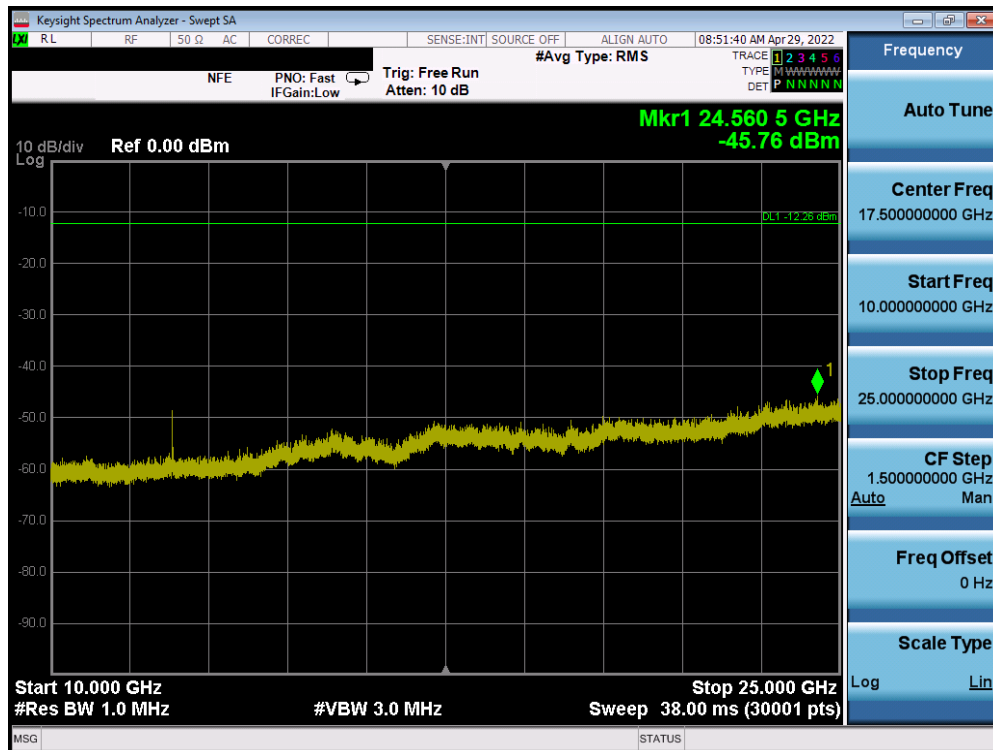

Plot 7-92. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 72 of 106

7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-12 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 73 of 106

V9.0 02/01/2019

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

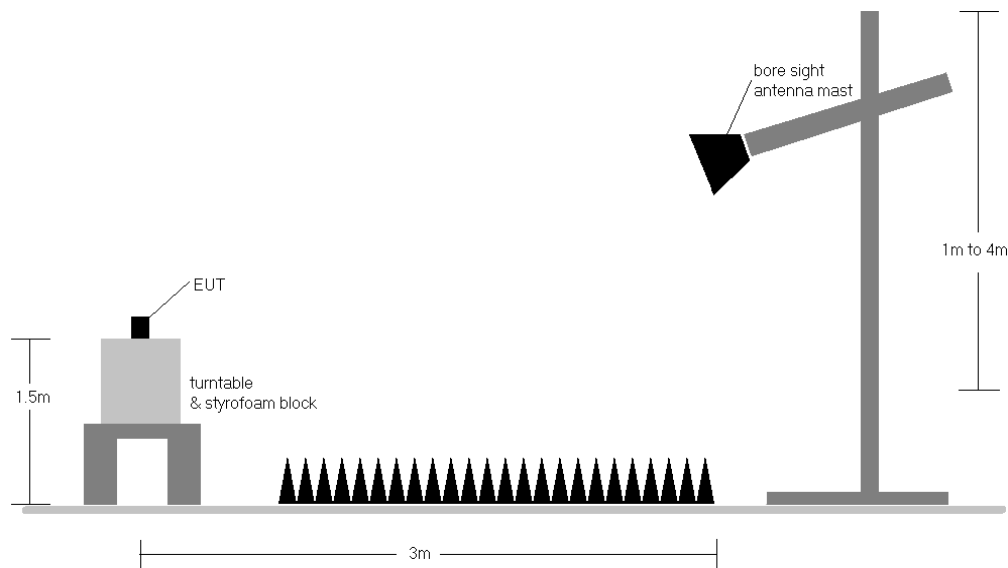


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-12.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 74 of 106



produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{\text{[dB}\mu\text{V/m]}} = \text{Analyzer Level}_{\text{[dBm]}} + 107 + \text{AFCL}_{\text{[dB/m]}}$
- AFCL $_{\text{[dB/m]}} = \text{Antenna Factor}_{\text{[dB/m]}} + \text{Cable Loss}_{\text{[dB]}}$
- Margin $_{\text{[dB]}} = \text{Field Strength Level}_{\text{[dB}\mu\text{V/m]}} - \text{Limit}_{\text{[dB}\mu\text{V/m]}}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 75 of 106

V9.0 02/01/2019


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.1 SISO Antenna-1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

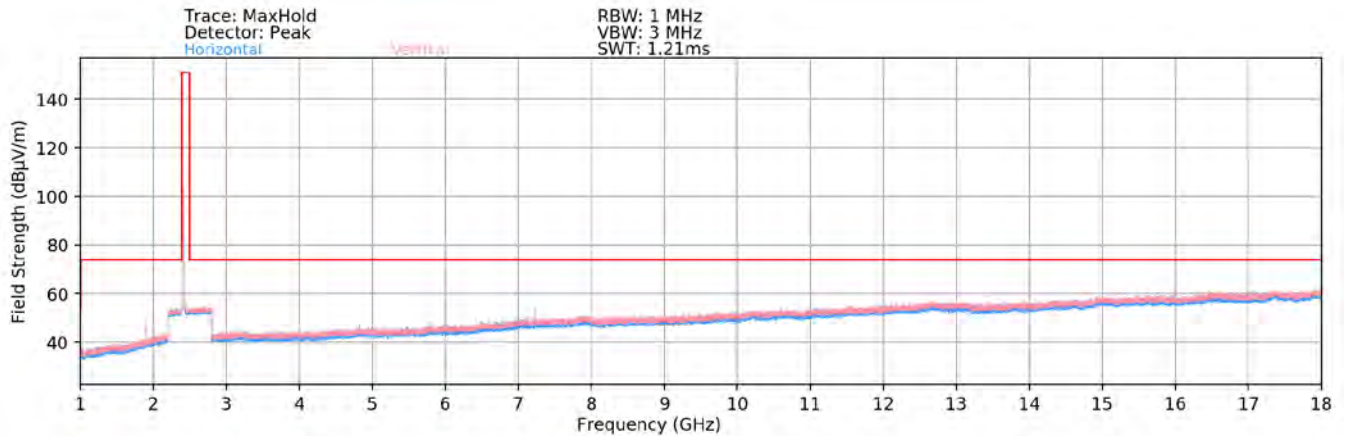

Plot 7-93. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 1) – Open

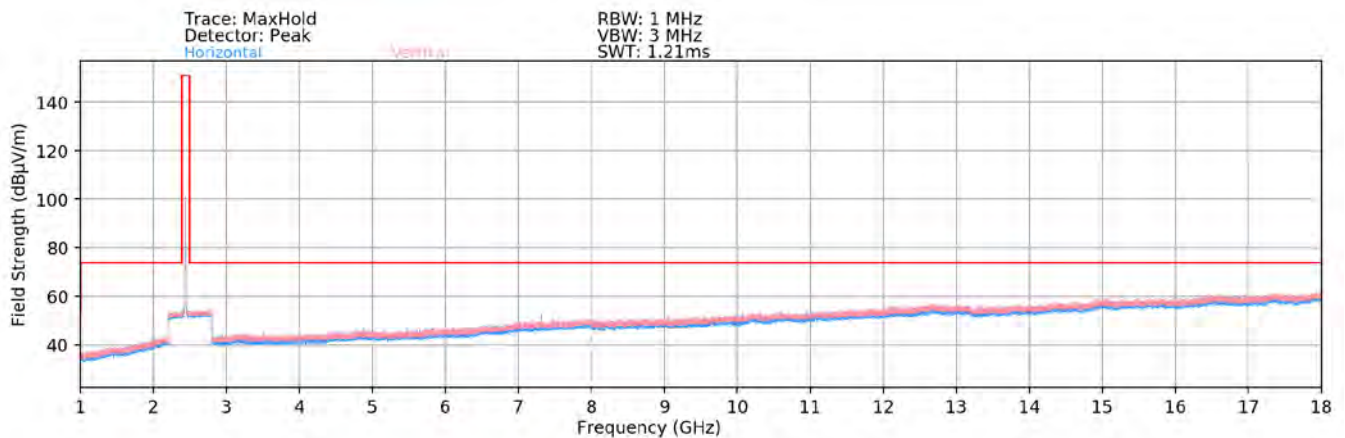

Plot 7-94. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 6) – Open

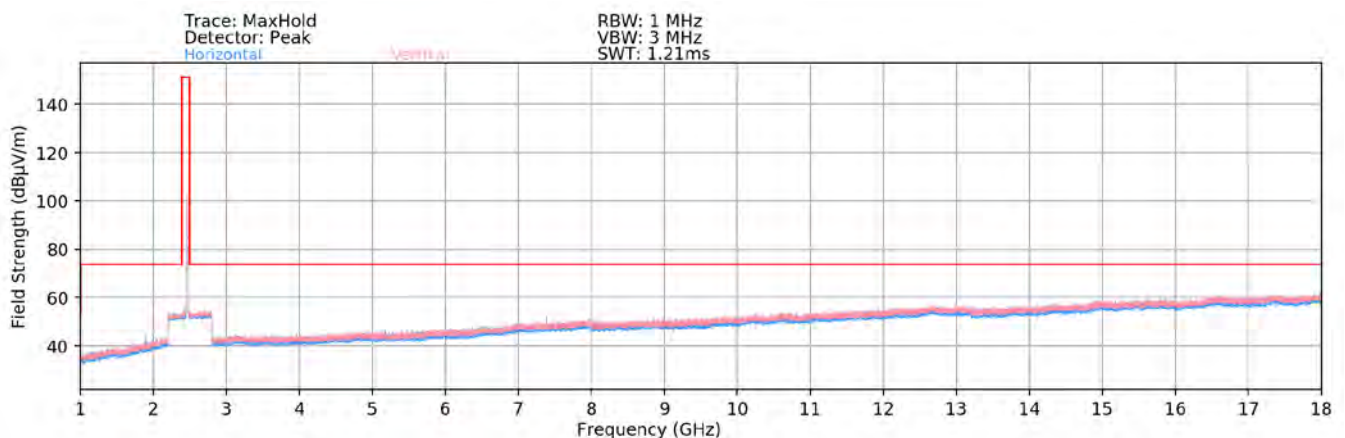


Plot 7-95. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 11) – Open


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 76 of 106

V9.0 02/01/2019


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

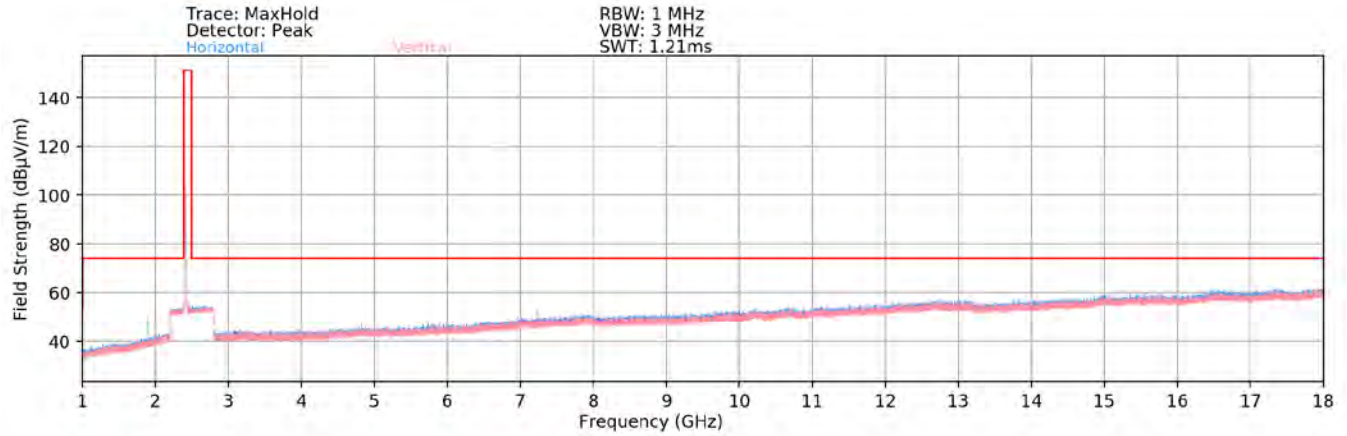

Plot 7-96. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 1) – Half Open

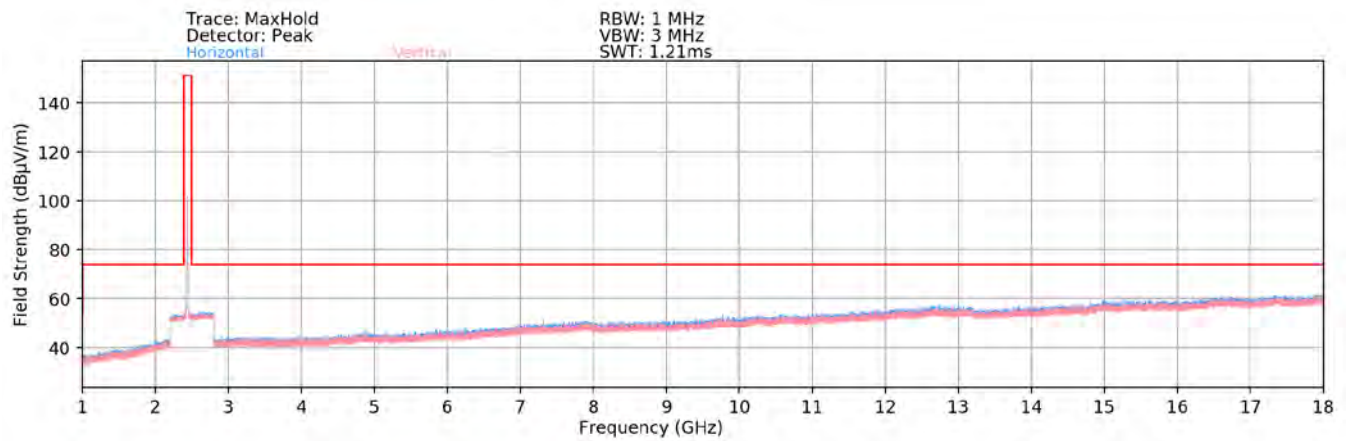

Plot 7-97. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 6) – Half Open

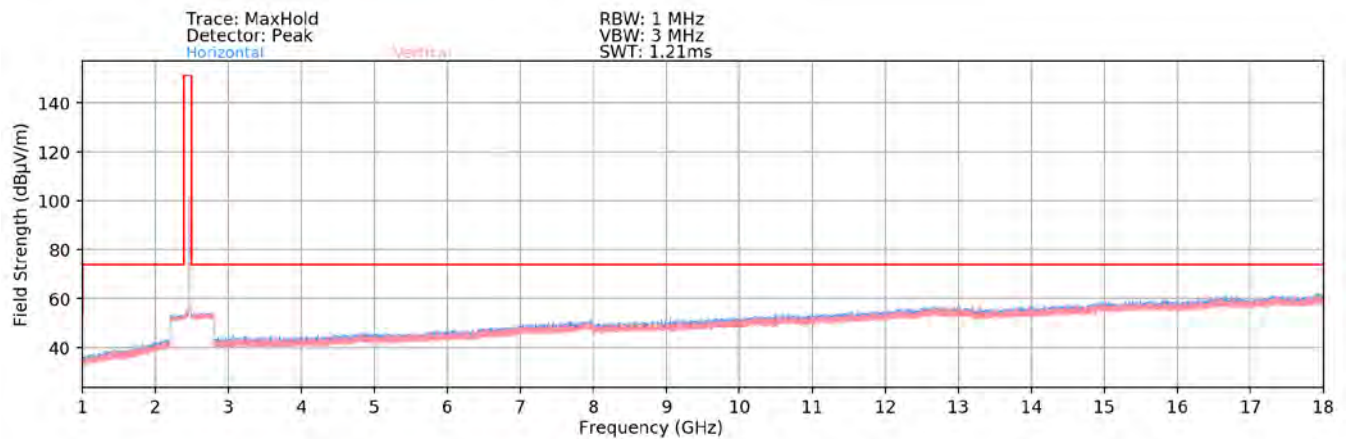


Plot 7-98. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 11) – Half Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 77 of 106

SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

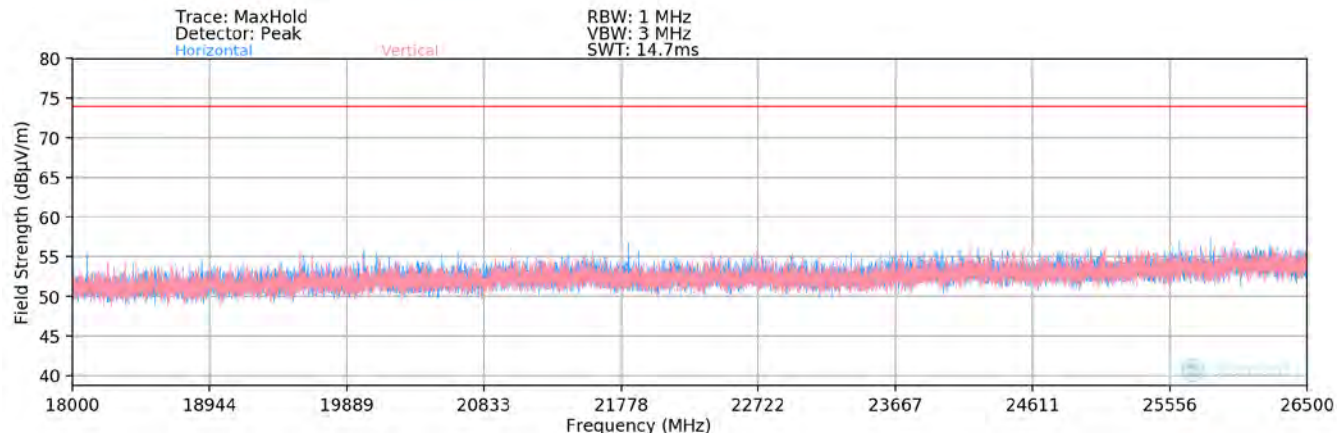

Plot 7-99. Radiated Spurious Plot above 18GHz SISO ANT1 – Open



Plot 7-100. Radiated Spurious Plot above 18GHz SISO ANT1 – Half Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 78 of 106

V9.0 02/01/2019

SISO Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	137	8	-70.44	7.68	44.24	53.98	-9.74
4824.00	Peak	H	137	8	-65.14	7.68	49.54	73.98	-24.44
12060.00	Avg	H	-	-	-83.32	18.40	42.08	53.98	-11.90
12060.00	Peak	H	-	-	-71.48	18.40	53.92	73.98	-20.06

Table 7-13. Radiated Measurements SISO ANT1 – Open

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	108	7	-80.20	7.34	34.14	53.98	-19.84
4874.00	Peak	H	108	7	-65.21	7.34	49.13	73.98	-24.85
7311.00	Avg	H	112	78	-72.51	12.49	46.98	53.98	-7.00
7311.00	Peak	H	112	78	-65.83	12.49	53.66	73.98	-20.32
12185.00	Avg	H	-	-	-83.16	19.42	43.26	53.98	-10.72
12185.00	Peak	H	-	-	-71.82	19.42	54.60	73.98	-19.38

Table 7-14. Radiated Measurements SISO ANT1 – Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 79 of 106

V9.0 02/01/2019

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	153	9	-72.23	7.61	42.38	53.98	-11.60
4924.00	Peak	H	153	9	-65.28	7.61	49.33	73.98	-24.65
7386.00	Avg	H	113	66	-73.04	12.37	46.33	53.98	-7.65
7386.00	Peak	H	113	66	-64.85	12.37	54.52	73.98	-19.46
12310.00	Avg	H	-	-	-82.84	19.09	43.25	53.98	-10.73
12310.00	Peak	H	-	-	-71.79	19.09	54.30	73.98	-19.68

Table 7-15. Radiated Measurements SISO ANT1 – Open

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	126	322	-76.22	7.34	38.12	53.98	-15.86
4874.00	Peak	H	126	322	-68.06	7.34	46.28	73.98	-27.70
7311.00	Avg	H	218	5	-74.26	12.49	45.23	53.98	-8.75
7311.00	Peak	H	218	5	-66.26	12.49	53.23	73.98	-20.75
12185.00	Avg	H	-	-	-82.26	19.42	44.16	53.98	-9.82
12185.00	Peak	H	-	-	-71.63	19.42	54.79	73.98	-19.19

Table 7-16. Radiated Measurements SISO ANT1 with WCP – Open


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 80 of 106

7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

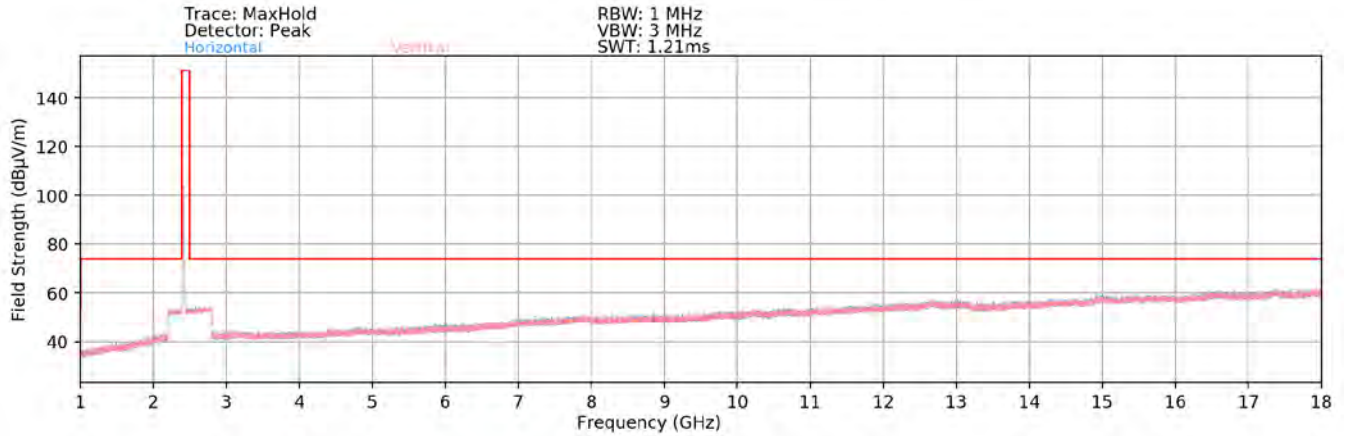

Plot 7-101. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1) – Half Open

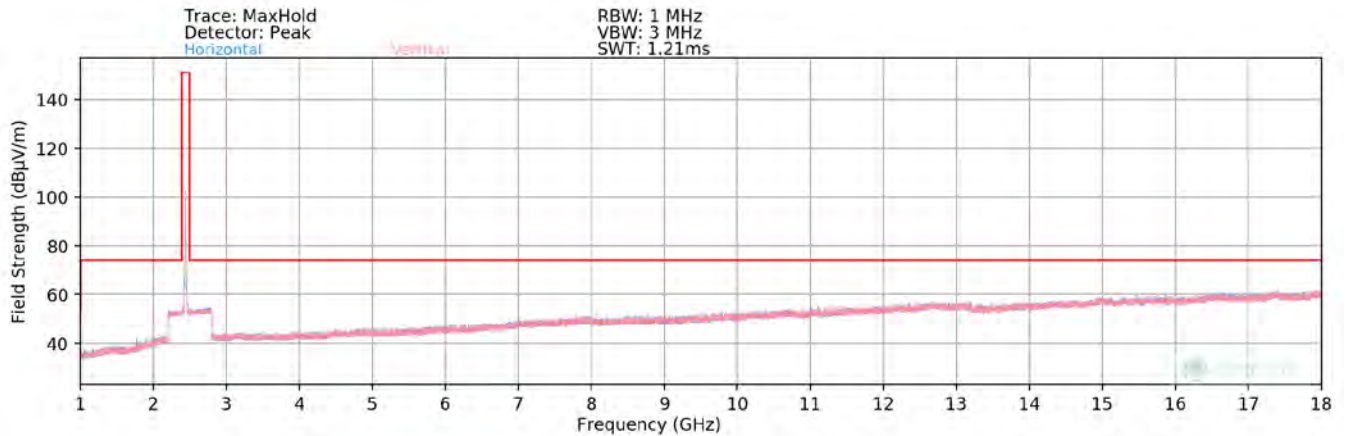

Plot 7-102. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6) – Half Open

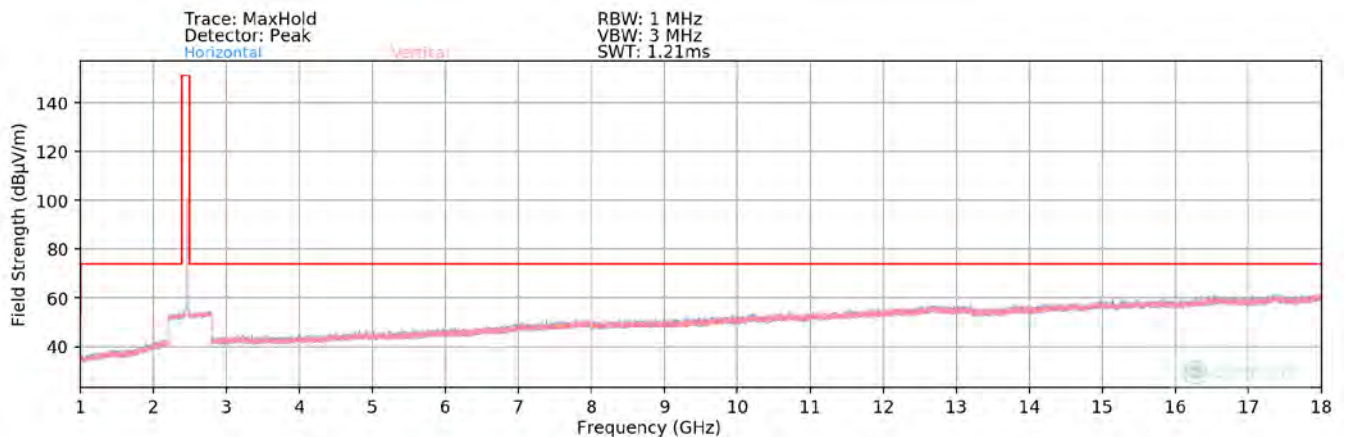


Plot 7-103. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11) – Half Open


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 81 of 106

V9.0 02/01/2019


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

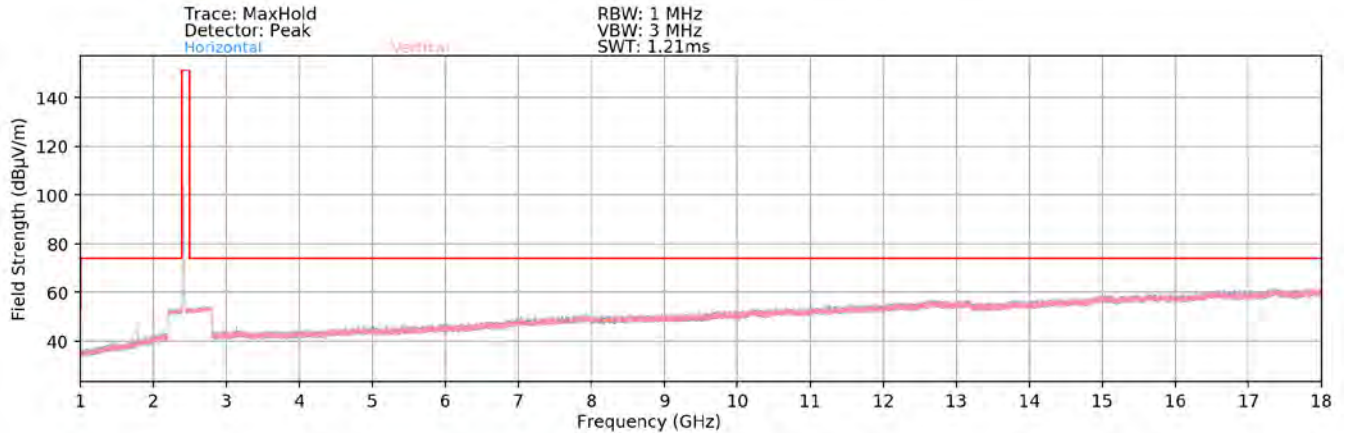

Plot 7-104. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1) – Open

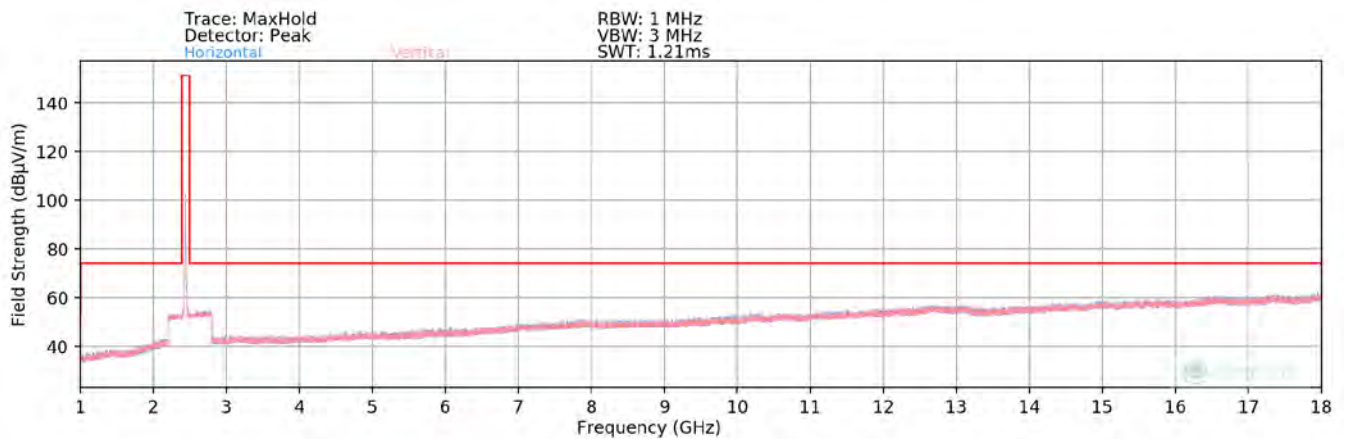

Plot 7-105. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6) – Open

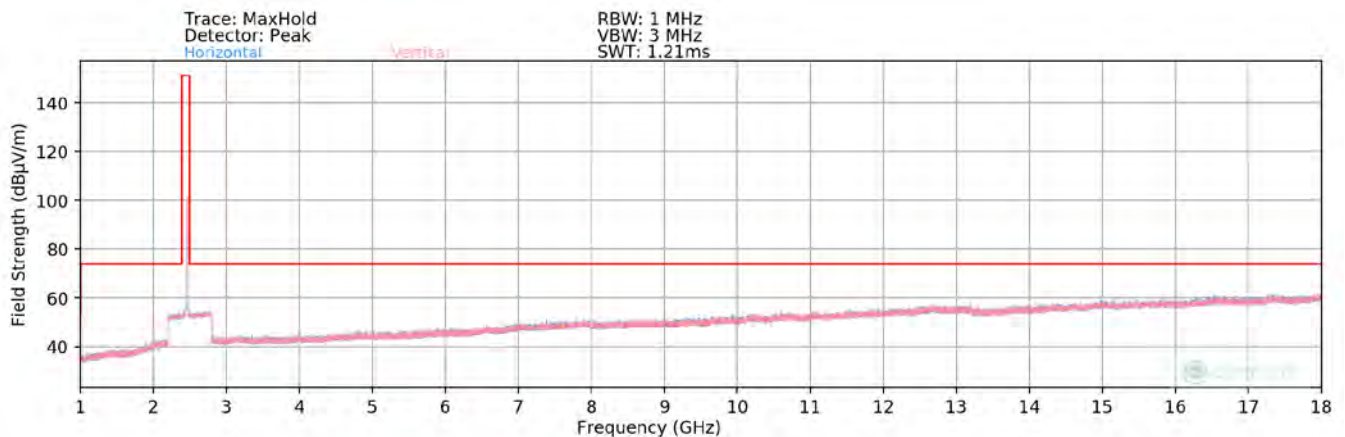

Plot 7-106. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11) – Open


SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 82 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

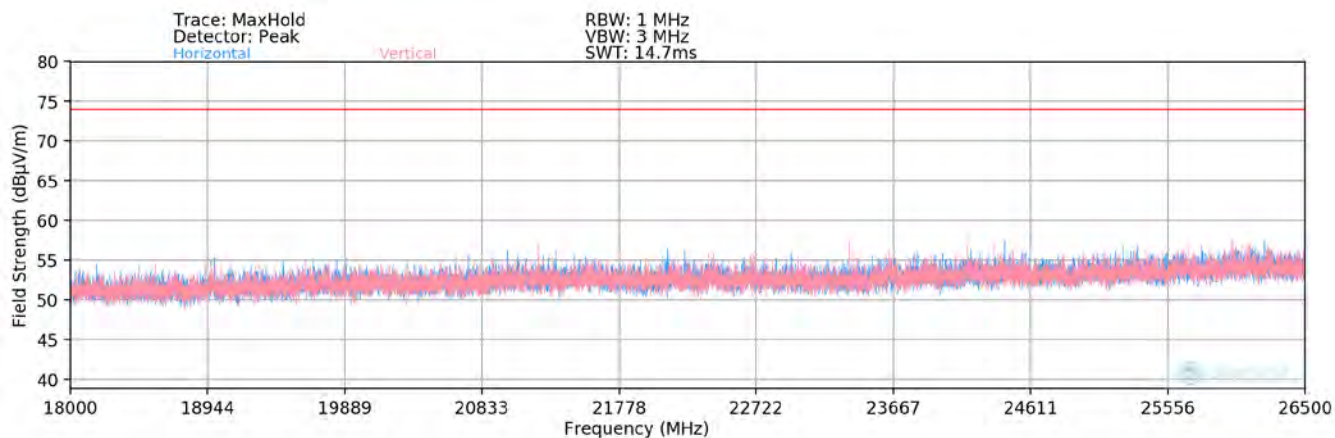

Plot 7-107. Radiated Spurious Plot above 18GHz SISO ANT2 – Half Open



Plot 7-108. Radiated Spurious Plot above 18GHz SISO ANT2 – Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 83 of 106

V9.0 02/01/2019

SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	257	117	-79.19	7.68	35.49	53.98	-18.49
4824.00	Peak	H	257	117	-68.25	7.68	46.43	73.98	-27.55
12060.00	Avg	H	-	-	-81.57	18.40	43.83	53.98	-10.15
12060.00	Peak	H	-	-	-70.98	18.40	54.42	73.98	-19.56

Table 7-17. Radiated Measurements SISO ANT2 – Half Open

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.52	7.34	34.82	53.98	-19.16
4874.00	Peak	H	-	-	-68.65	7.34	45.69	73.98	-28.29
7311.00	Avg	H	238	133	-75.80	12.49	43.69	53.98	-10.29
7311.00	Peak	H	238	133	-66.21	12.49	53.28	73.98	-20.70
12185.00	Avg	H	-	-	-82.05	19.42	44.37	53.98	-9.61
12185.00	Peak	H	-	-	-71.13	19.42	55.29	73.98	-18.69

Table 7-18. Radiated Measurements SISO ANT2– Half Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 84 of 106

V9.0 02/01/2019

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.26	7.61	35.35	53.98	-18.63
4924.00	Peak	H	-	-	-68.52	7.61	46.09	73.98	-27.89
7386.00	Avg	H	244	137	-76.31	12.37	43.06	53.98	-10.92
7386.00	Peak	H	244	137	-66.34	12.37	53.03	73.98	-20.95
12310.00	Avg	H	-	-	-82.26	19.09	43.83	53.98	-10.15
12310.00	Peak	H	-	-	-70.52	19.09	55.57	73.98	-18.41

Table 7-19. Radiated Measurements SISO ANT2– Half Open

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.42	7.34	34.92	53.98	-19.06
4874.00	Peak	H	-	-	-68.98	7.34	45.36	73.98	-28.62
7311.00	Avg	H	150	143	-76.39	12.49	43.10	53.98	-10.88
7311.00	Peak	H	150	143	-67.16	12.49	52.33	73.98	-21.65
12185.00	Avg	H	-	-	-83.08	19.42	43.34	53.98	-10.64
12185.00	Peak	H	-	-	-71.25	19.42	55.17	73.98	-18.81

Table 7-20. Radiated Measurements SISO ANT2 with WCP


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 85 of 106

7.7.3 MIMO/CDD Radiated Spurious Emission Measurements


\$15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

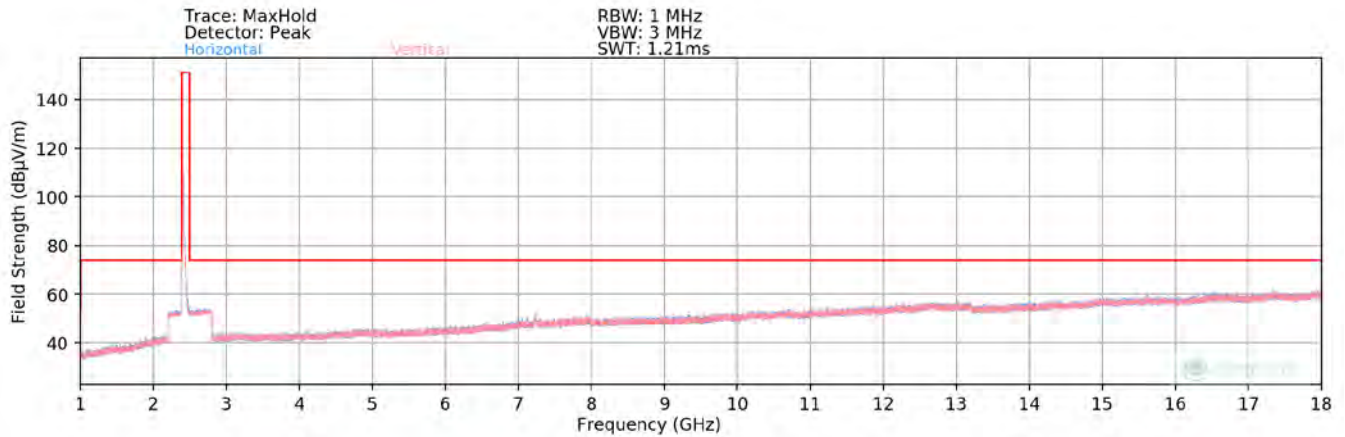

Plot 7-109. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 1) – Half Open

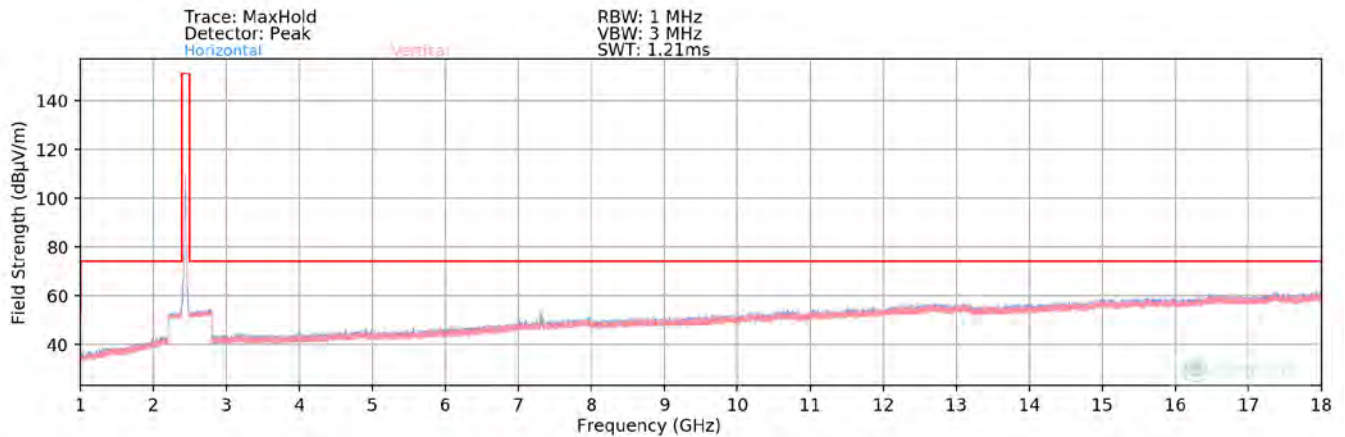

Plot 7-110. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 6) – Half Open

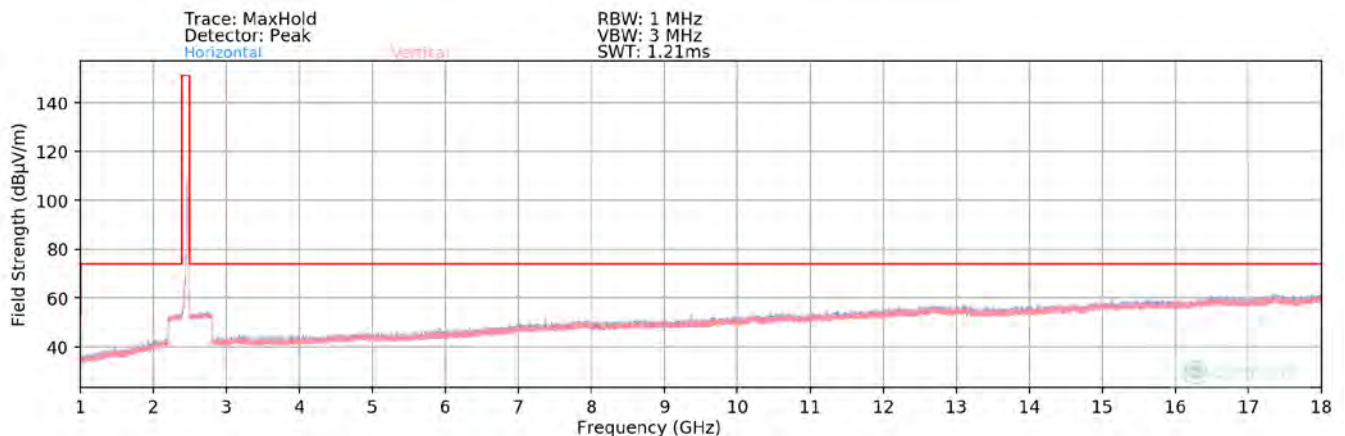


Plot 7-111. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 11) – Half Open


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 86 of 106

V9.0 02/01/2019


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

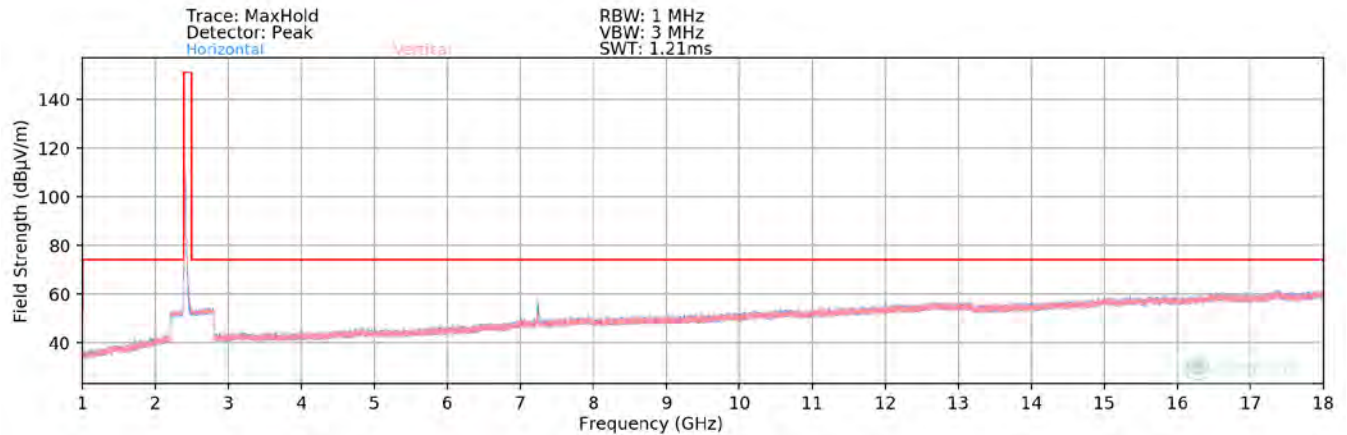

Plot 7-112. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 1) – Open

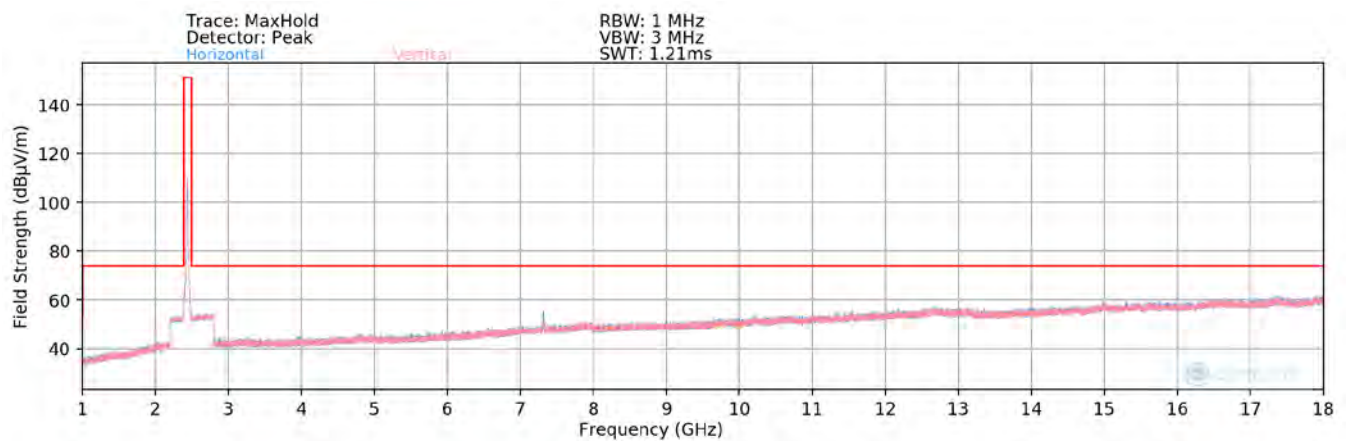

Plot 7-113. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 6) – Open

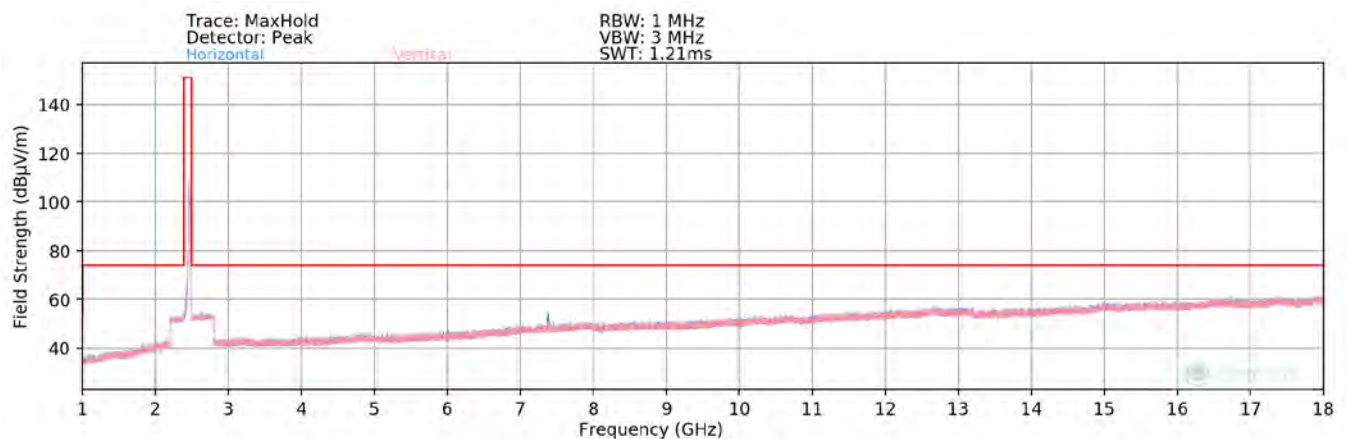


Plot 7-114. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 11) – Open


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 87 of 106

MIMO/CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

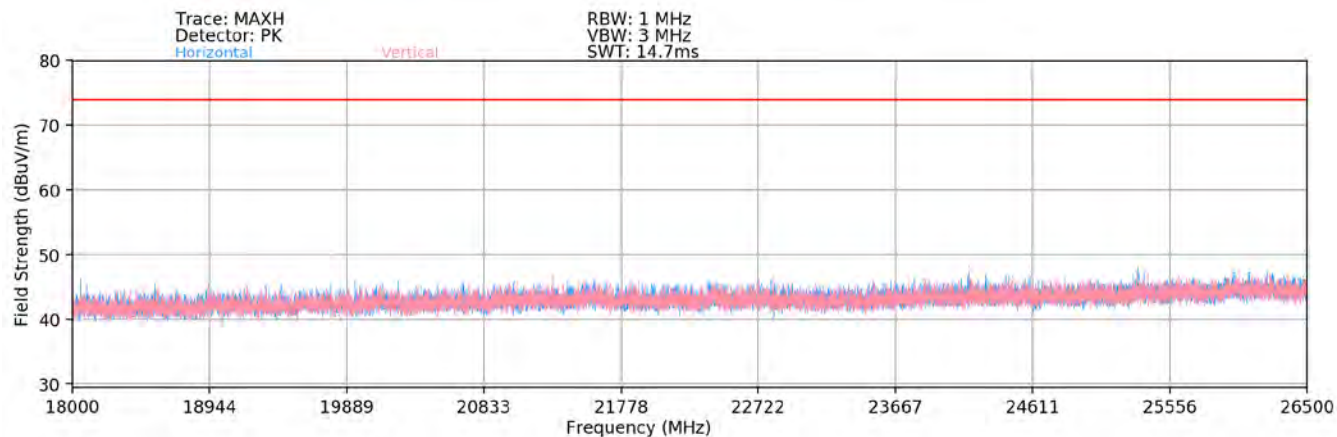

Plot 7-115. Radiated Spurious Plot above 18GHz MIMO/CDD – Half Open

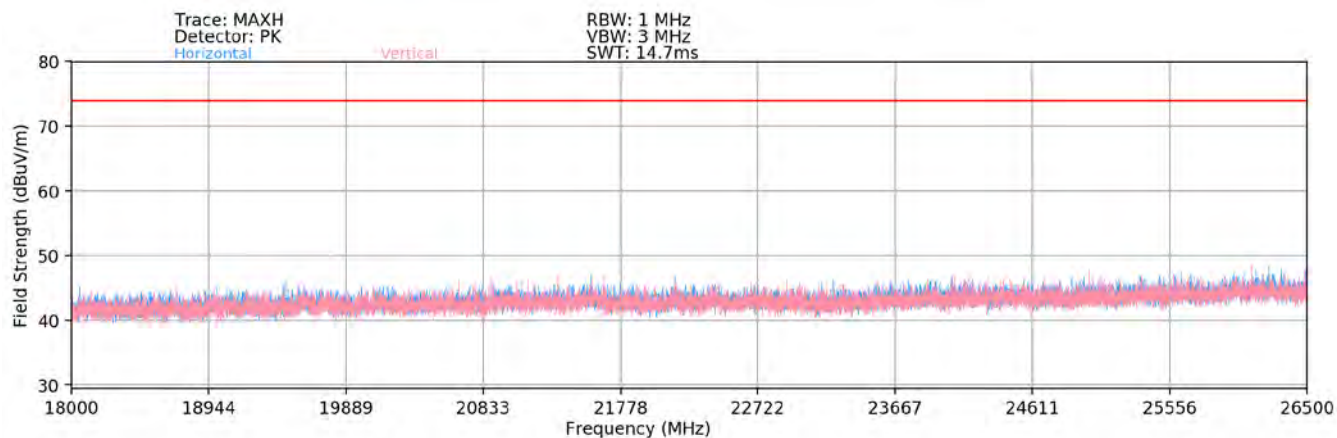

Plot 7-116. Radiated Spurious Plot above 18GHz MIMO/CDD – Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 88 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO/CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	159	108	-77.89	7.68	36.79	53.98	-17.19
4824.00	Peak	V	159	108	-66.75	7.68	47.93	73.98	-26.05
12060.00	Avg	V	-	-	-81.68	18.40	43.72	53.98	-10.26
12060.00	Peak	V	-	-	-70.66	18.40	54.74	73.98	-19.24

Table 7-21. Radiated Measurements MIMO/CDD – Half Open

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	155	114	-78.14	7.34	36.20	53.98	-17.78
4874.00	Peak	V	155	114	-66.01	7.34	48.33	73.98	-25.65
7311.00	Avg	V	224	119	-74.92	12.49	44.57	53.98	-9.41
7311.00	Peak	V	224	119	-63.04	12.49	56.45	73.98	-17.53
12185.00	Avg	V	-	-	-82.01	19.42	44.41	53.98	-9.57
12185.00	Peak	V	-	-	-71.10	19.42	55.32	73.98	-18.66

Table 7-22. Radiated Measurements MIMO/CDD

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 89 of 106

V9.0 02/01/2019

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	159	110	-78.21	7.61	36.40	53.98	-17.58
4924.00	Peak	V	159	110	-66.75	7.61	47.86	73.98	-26.12
7386.00	Avg	V	211	115	-75.73	12.37	43.64	53.98	-10.34
7386.00	Peak	V	211	115	-64.45	12.37	54.92	73.98	-19.06
12310.00	Avg	V	-	-	-82.20	19.09	43.89	53.98	-10.09
12310.00	Peak	V	-	-	-70.66	19.09	55.43	73.98	-18.55

Table 7-23. Radiated Measurements MIMO/CDD

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	146	245	-79.24	7.34	35.10	53.98	-18.88
4874.00	Peak	V	146	245	-62.66	7.34	51.68	73.98	-22.30
7311.00	Avg	V	-	-	-80.55	12.49	38.94	53.98	-15.04
7311.00	Peak	V	-	-	-68.38	12.49	51.11	73.98	-22.87
12185.00	Avg	V	-	-	-81.79	19.42	44.63	53.98	-9.35
12185.00	Peak	V	-	-	-70.75	19.42	55.67	73.98	-18.31

Table 7-24. Radiated Measurements MIMO/CDD with WCP


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 90 of 106

7.7.4 SISO Antenna-1 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

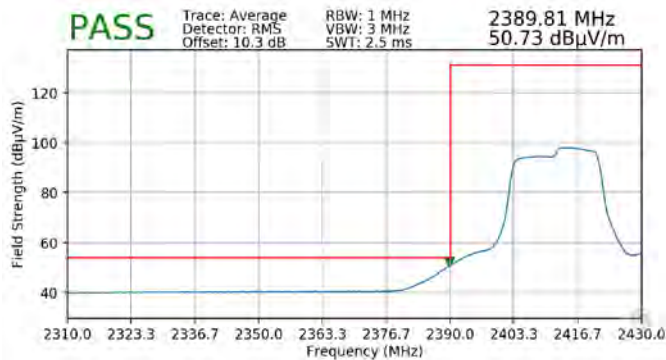


Plot 7-117. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)

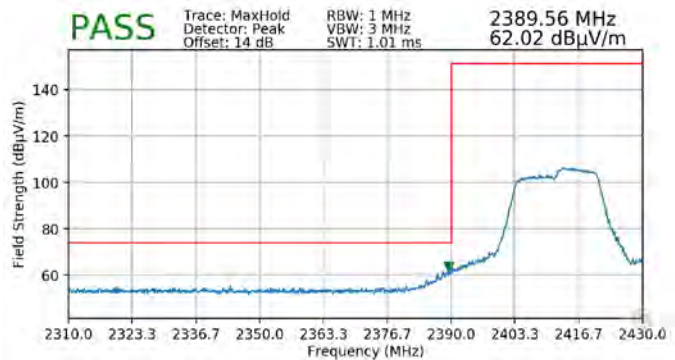


Plot 7-118. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6M bps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

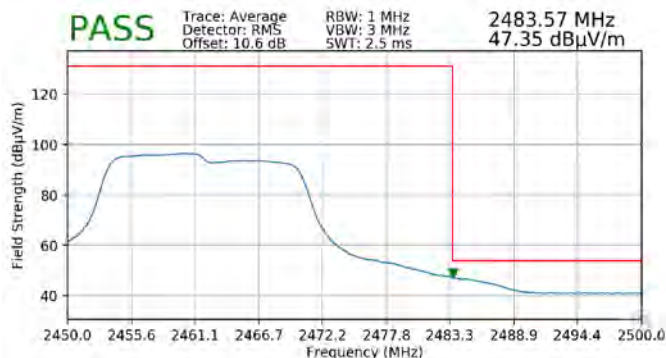

Plot 7-119. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

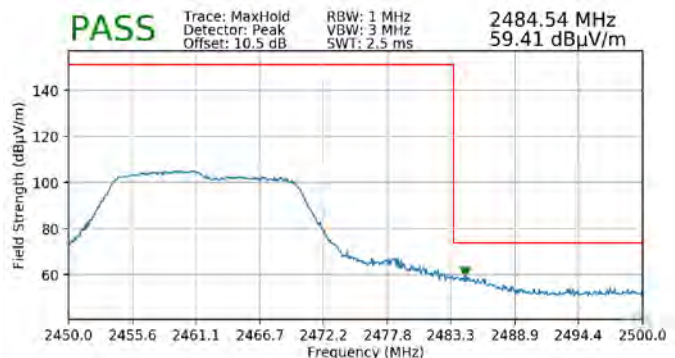

Plot 7-120. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 91 of 106


V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6M bps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12



Plot 7-121. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

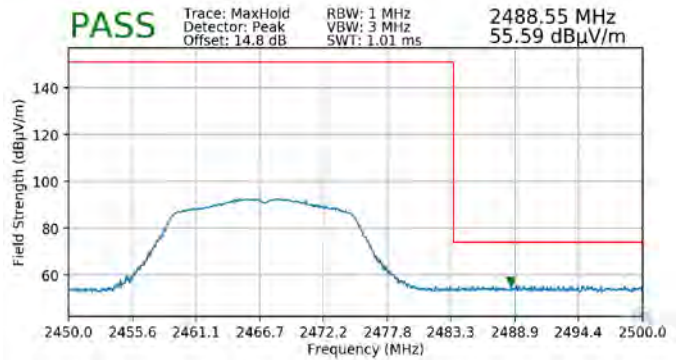


Plot 7-122. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MSC0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13



Plot 7-123. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

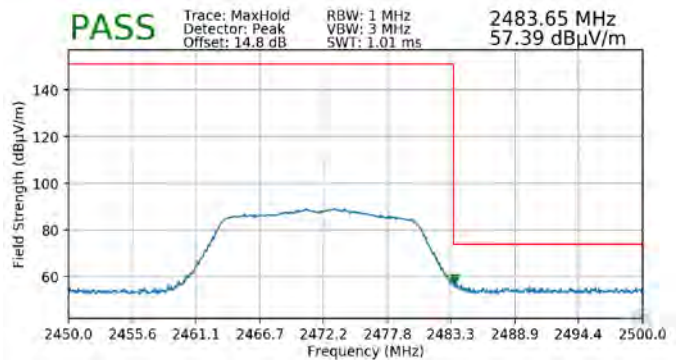

Plot 7-124. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 92 of 106

7.7.5 SISO Antenna-2 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

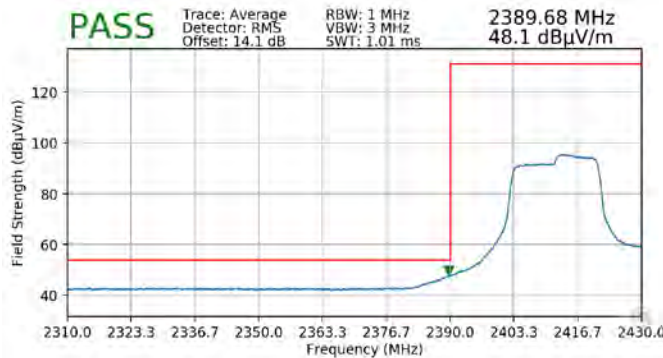


Plot 7-125. Radiated Restricted Band Edge Measurement SISO ANT2 with WCP (Average)

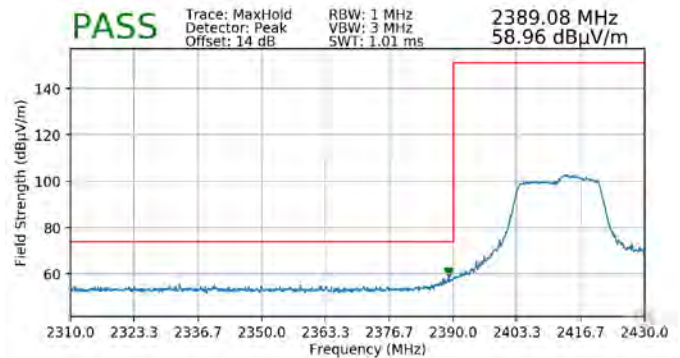


Plot 7-126. Radiated Restricted Band Edge Measurement SISO ANT2 with WCP (Peak)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

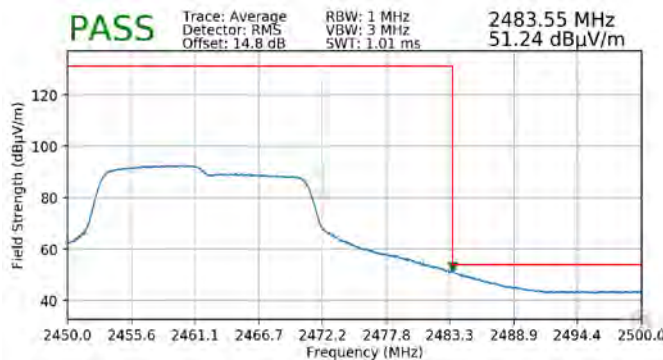

Plot 7-127. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

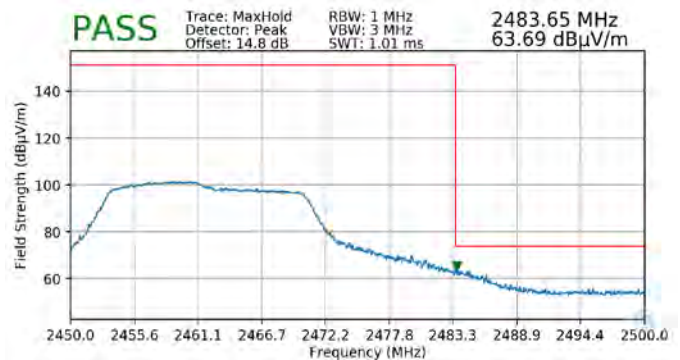

Plot 7-128. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 93 of 106

V9.0 02/01/2019

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12



Plot 7-129. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

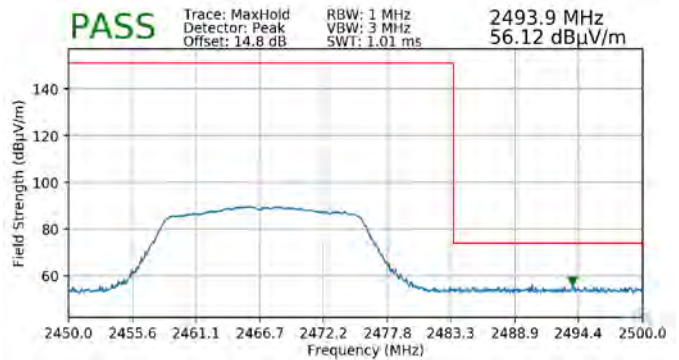


Plot 7-130. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13't



Plot 7-131. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

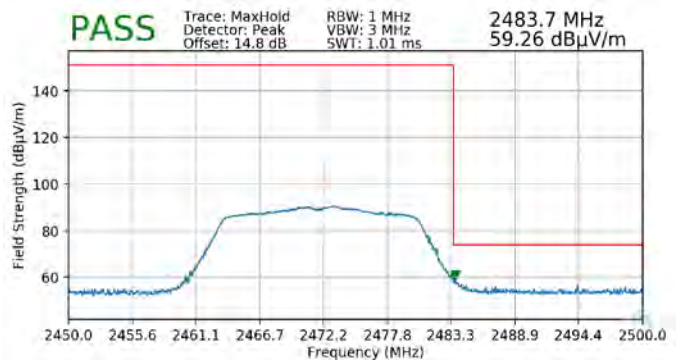

Plot 7-132. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 94 of 106

7.7.6 MIMO Radiated Restricted Band Edge Measurements


\$15.205 \$15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

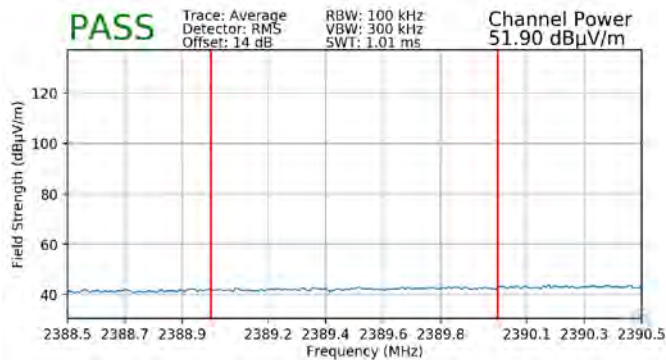

Plot 7-133. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

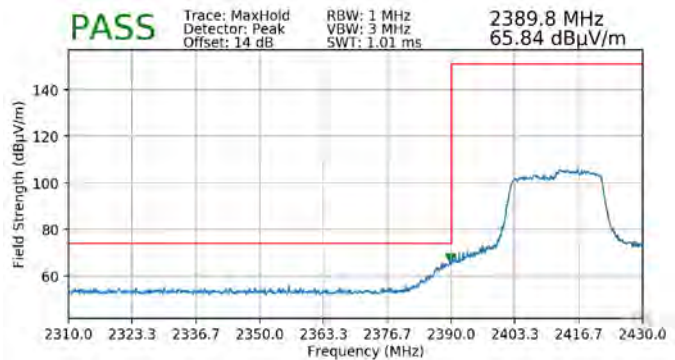

Plot 7-134. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6M bps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11



Plot 7-135. Radiated Restricted Upper Band Edge Measurement MIMO (Average)




Plot 7-136. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 95 of 106


V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

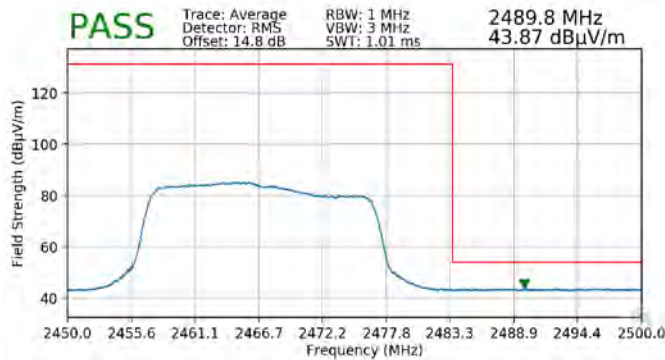


Plot 7-137. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

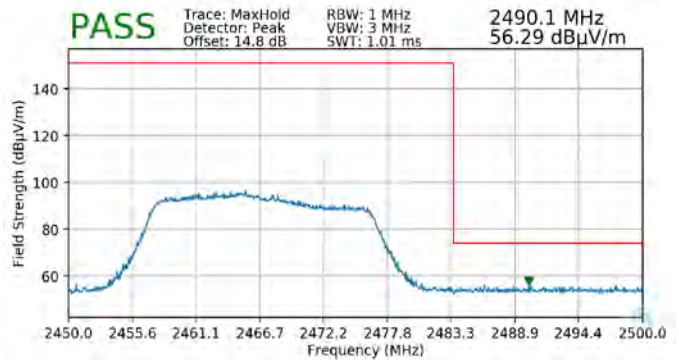


Plot 7-138. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

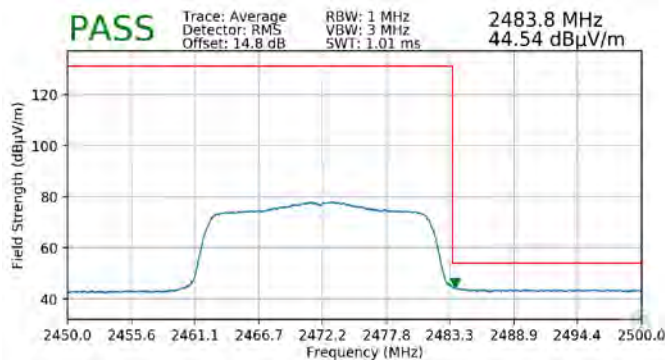


Plot 7-139. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

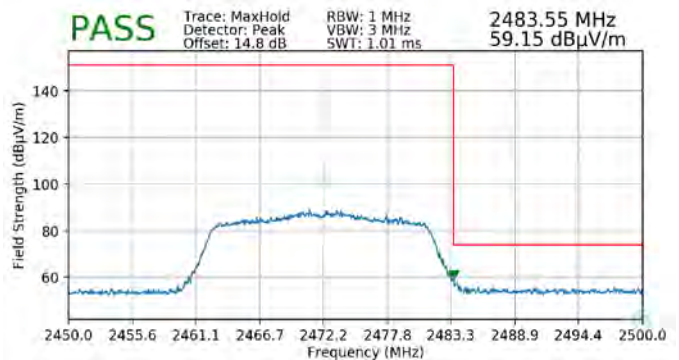


Plot 7-140. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 96 of 106

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

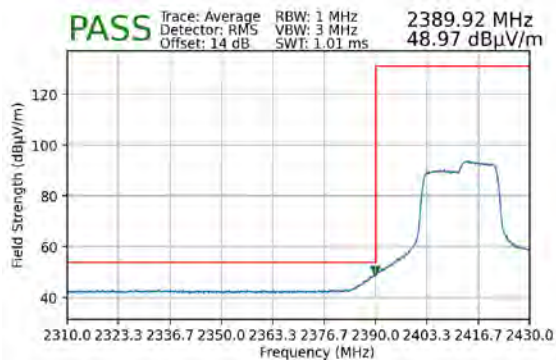

Plot 7-141. Radiated Restricted Band Edge Measurement MIMO with WCP (Average)

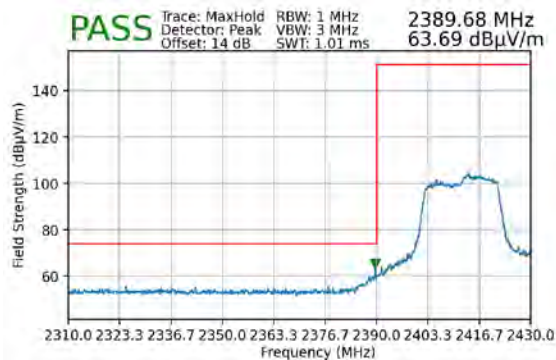

Plot 7-142. Radiated Restricted Band Edge Measurement MIMO with WCP (Peak)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 97 of 106

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 98 of 106

V9.0 02/01/2019

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

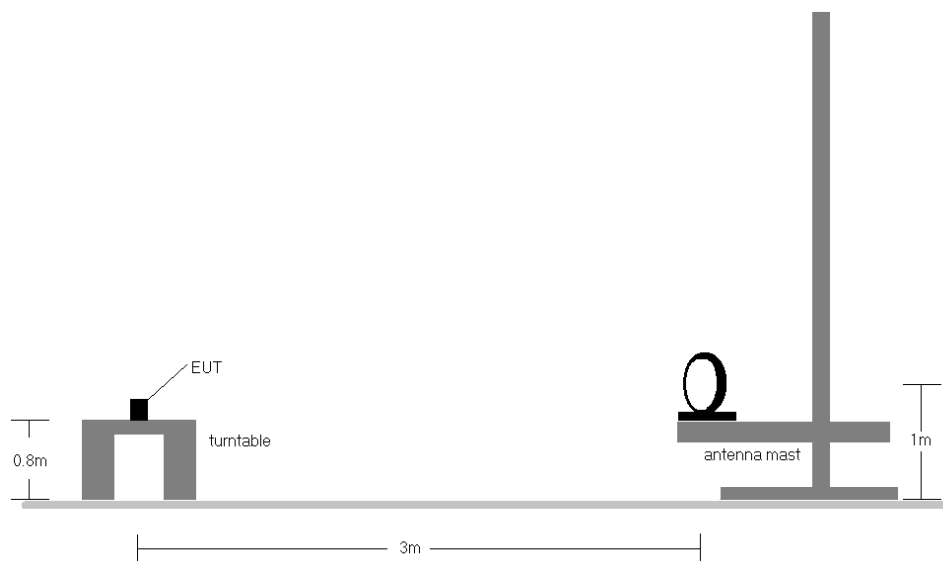


Figure 7-7. Radiated Test Setup < 30Mhz

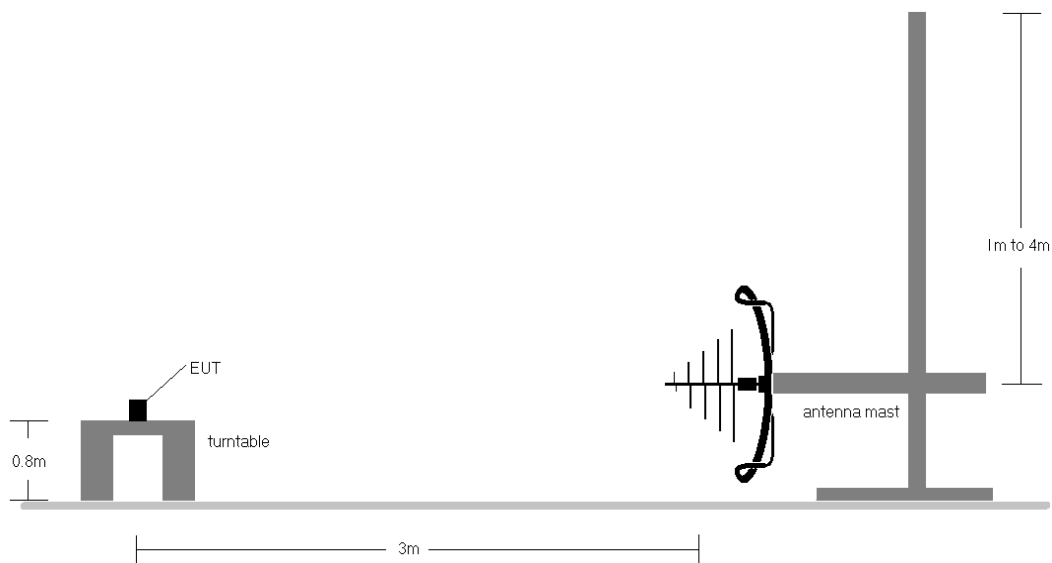


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 99 of 106

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes


1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 100 of 106

V9.0 02/01/2019

SISO Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

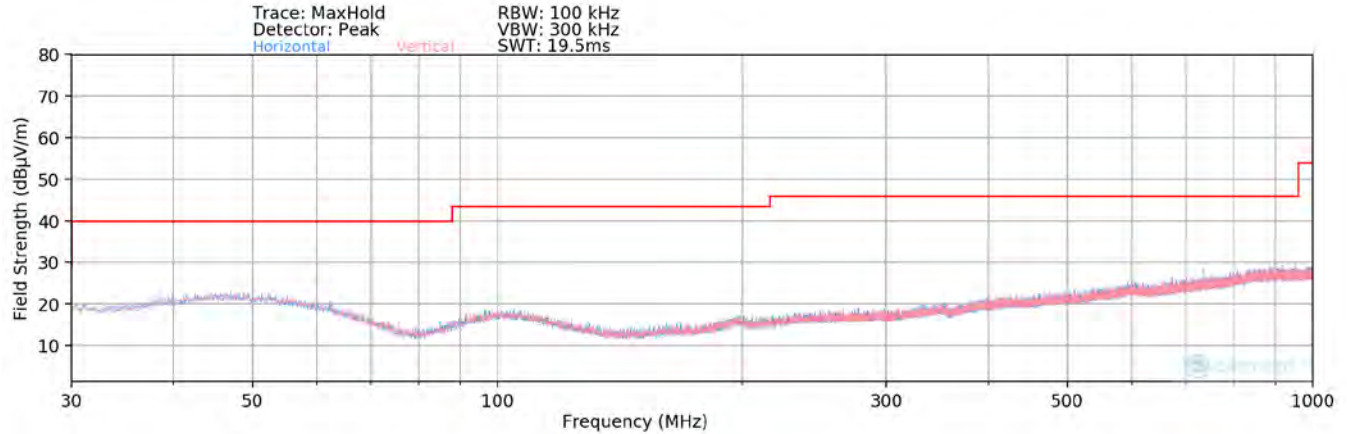

Plot 7-143. Radiated Spurious Plot below 1GHz SISO ANT 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
39.97	Quasi-Peak	H	-	-	-68.92	-15.42	22.66	40.00	-17.34
72.83	Quasi-Peak	H	-	-	-69.82	-19.93	17.25	40.00	-22.75
302.41	Quasi-Peak	H	-	-	-73.30	-14.16	19.54	46.02	-26.48
313.66	Quasi-Peak	H	-	-	-73.52	-13.82	19.66	46.02	-26.36
552.32	Quasi-Peak	H	-	-	-74.16	-8.90	23.94	46.02	-22.08
872.93	Quasi-Peak	H	-	-	-74.79	-3.79	28.42	46.02	-17.60

Table 7-26. Radiated Measurements <1GHz

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 101 of 106

V9.0 02/01/2019

7.9 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 102 of 106

V9.0 02/01/2019

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


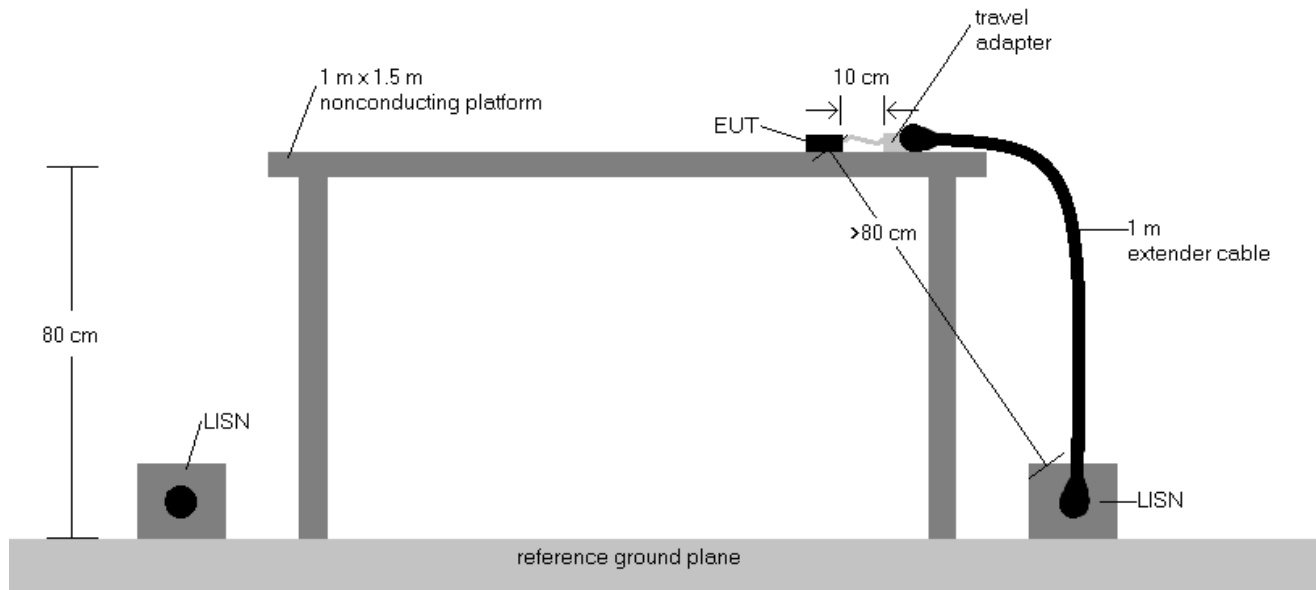


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 103 of 106

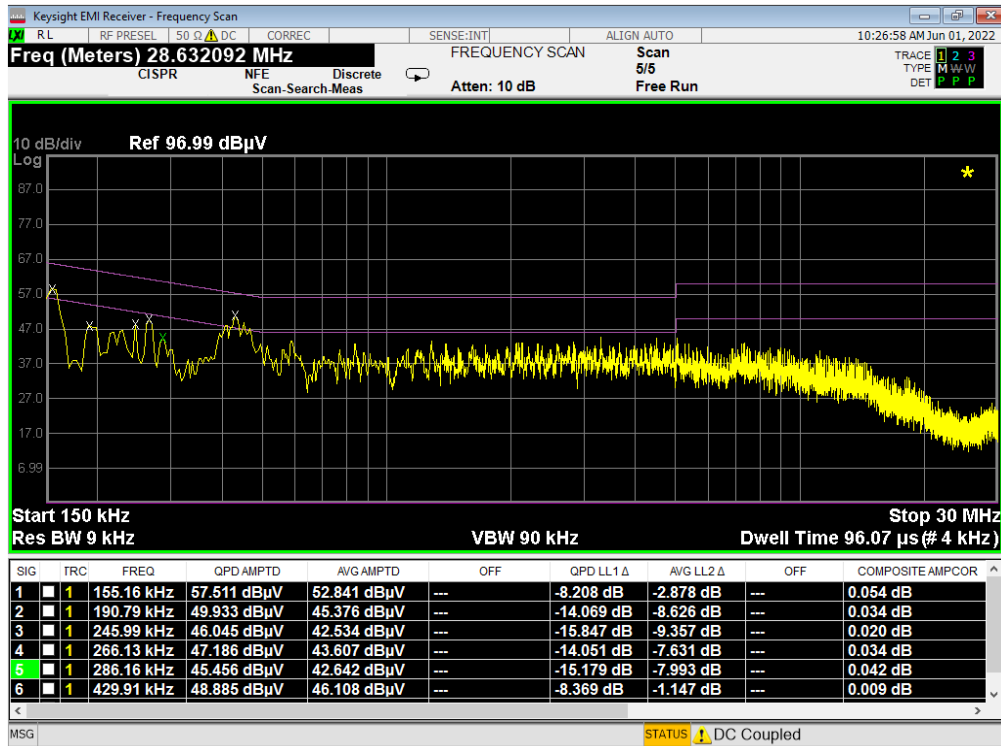


Plot 7-144. Line Conducted Plot with 802.11b (L1) – Open

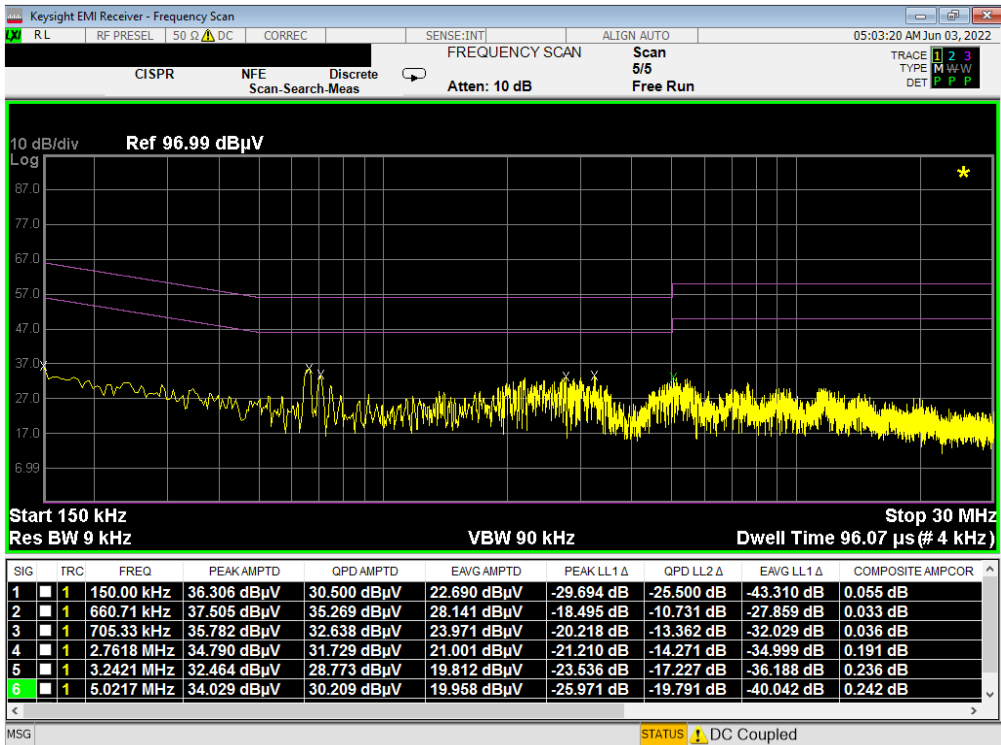


Plot 7-145. Line Conducted Plot with 802.11b (N) – Open

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1-A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 104 of 106

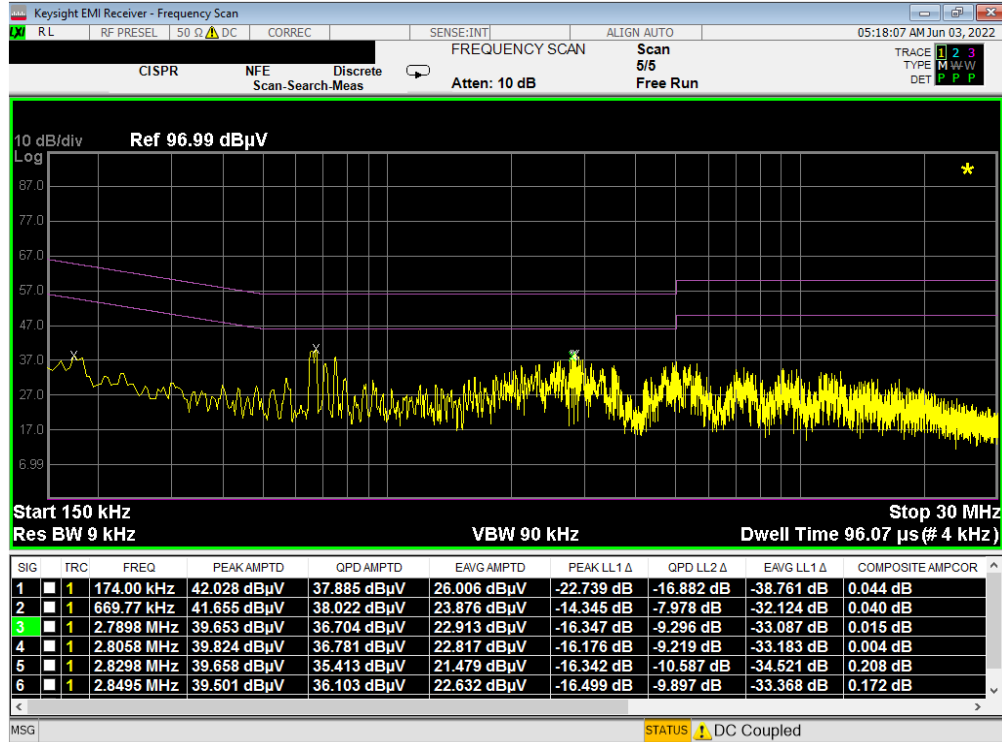

Plot 7-146. Line Conducted Plot with 802.11b (L1) – Closed

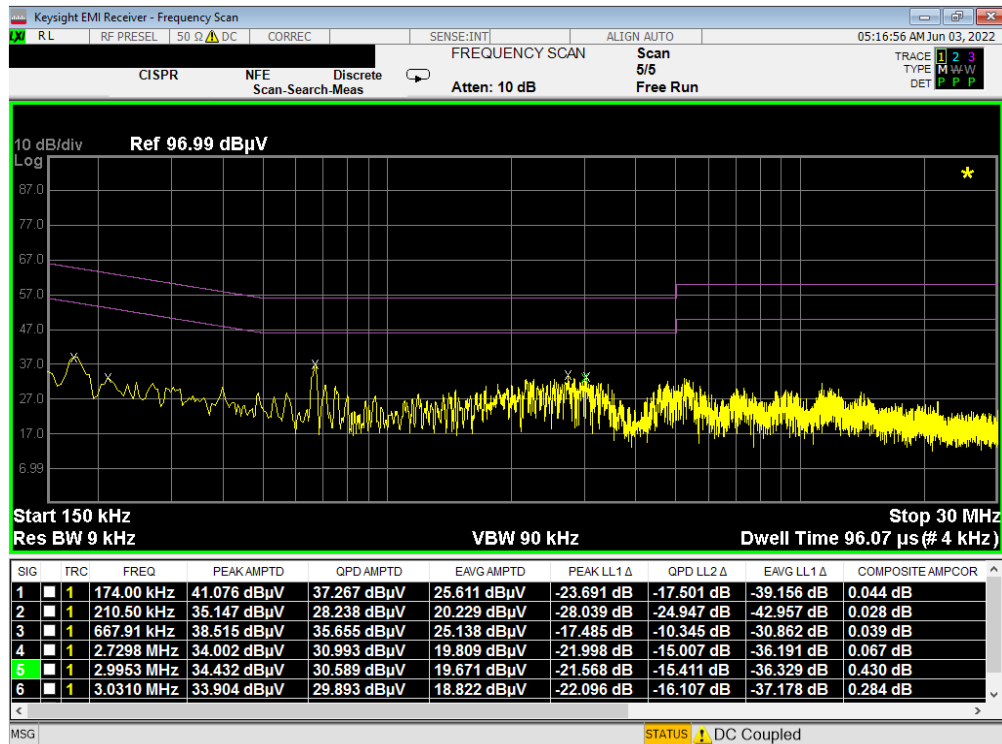

Plot 7-147. Line Conducted Plot with 802.11b (N) – Closed

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 105 of 106

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF721JPN** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-09-R1.A3L	Test Dates: 4/8/2022-7/30/2022	EUT Type: Portable Handset	Page 106 of 106