



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.381.1520
<http://www.element.com>

MEASUREMENT REPORT FCC Part 15.407 802.11a/ax WiFi 6E (OFDM)

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
3/4 – 5/26/2023
Test Report Issue Date:
7/11/2023
Test Site/Location:
Element lab., Columbia, MD, USA
Test Report Serial No.:
1M2304260059-14-R1.A3L

FCC ID:	A3LSMF731JPN
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SC-54D
Additional Model(s): SCG23
EUT Type: Portable Handset
Frequency Range: 5935 – 7115MHz
Modulation Type: OFDM
FCC Classification: 15E 6GHz Low Power Dual Client (6CD)
FCC Rule Part(s): Part 15 Subpart E (15.407)
Test Procedure(s): ANSI C63.10-2013, KDB 987594 D02 v01r01,
KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2304260059-14-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 1 of 122

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	9
2.4	Test Configuration.....	10
2.5	Software and Firmware	10
2.6	EMI Suppression Device(s) / Modifications.....	10
3.0	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure	11
3.2	AC Line Conducted Emissions	11
3.3	Radiated Emissions.....	12
3.4	Environmental Conditions.....	12
4.0	ANTENNA REQUIREMENTS	13
5.0	MEASUREMENT UNCERTAINTY	14
6.0	TEST EQUIPMENT CALIBRATION DATA.....	15
7.0	TEST RESULTS	16
7.1	Summary.....	16
7.2	26dB Bandwidth Measurement.....	18
7.3	UNII Output Power Measurement.....	39
7.4	Maximum Power Spectral Density.....	43
7.5	In-Band Emissions	62
7.6	Contention Based Protocol.....	81
7.7	Radiated Emission Measurements	93
7.8	Line Conducted Test Data.....	115
8.0	CONCLUSION.....	122

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 2 of 122

MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	MIMO	
			Max. Conducted Power [mW]	Max. Conducted Power [dBm]
20	5	5935 - 6415	24.266	13.85
	6	6435 - 6515	23.823	13.77
	7	6535 - 6875	24.378	13.87
	8	6895 - 7115	23.823	13.77
40	5	5965 - 6405	22.961	13.61
	6	6445 - 6525	22.439	13.51
	7	6565 - 6845	24.044	13.81
	8	6885 - 7085	22.909	13.60
80	5	5985 - 6385	29.580	14.71
	6	6465	29.854	14.75
	7	6545 - 6865	30.479	14.84
	8	6945 - 7025	27.925	14.46
160	5	6025 - 6345	25.763	14.11
	6	6505	29.376	14.68
	7	6665 - 6825	26.607	14.25
	8	6985	26.485	14.23

EUT Overview

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 3 of 122

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO\IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 4 of 122

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Electronics Co., Ltd. Portable Handset FCC ID: A3LSMF731JPN**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: 0032M, 0096M, 0097M, 0234M, 0084M, 0099M, 0082M, 0074M, 0153G, 0168G, 0163G, 0432M, 0164M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ac/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
2	5935	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 5 of 122



Band 5

Ch.	Frequency (MHz)
15	6025
47	6185
79	6345

Band 6

Ch.	Frequency (MHz)
111	6505

Band 7

Ch.	Frequency (MHz)
143	6665
175	6825

Band 8

Ch.	Frequency (MHz)
207	6985

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 6 of 122

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO (1+2)	
		Duty Cycle [%]	Radiated DCCF [dB]
6GHz	a	96.78	0.14
	ax (HE20)	99.67	N/A
	ax (HE40)	99.67	N/A
	ax (HE80)	99.67	N/A
	ax (HE160)	99.67	N/A

Table 2-5. Measured Duty Cycles

A duty cycle correction factor was applied to RMS measurements for transmission modes with <98% duty cycle. Example DCCF Calculation:

$$DCCF = 10\log(1/DC) = 10\log(1/0.9678) = 0.14$$

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
6GHz	11a	x	x	✓	✓	x	x
	11ax	x	x	✓	✓	✓	✓

Table 2-6. Antenna / Technology Configurations

✓= Support; x= NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 7 of 122



3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index	Spatial Stream	OFDM (802.11ax)											
			20MHz			40MHz			80MHz			160MHz		
			0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI
6	0	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	1	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	2	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	3	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	4	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	5	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	6	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	7	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
	8	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
	9	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
	10	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
	11	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
6	0	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	1	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	2	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	3	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	4	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	5	2	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	6	2	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	7	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
	8	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
	9	2	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
	10	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
	11	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7

Table 2-7. Supported Data Rates

4. The device supports either Standard Power (SP) or Low Power Indoor (LPI) operation in the following UNII bands:

UNII Band	Standard Power (SP)	Low Power Indoor (LPI)
UNII 5	✓	✓
UNII 6	✗	✓
UNII 7	✓	✓
UNII 8	✗	✓

Table 2-8. Power Operation

✓ = Support; ✗ = NOT Support

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 8 of 122



2.3 Antenna Description

The following antenna gains are used in this device per the "Unlicensed Band Antenna Gain" document provided by the client. This document is also included in the filing as a public exhibit.

Frequency	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 MHz	-10.51	-10.61	-7.55
6025 MHz	-10.75	-10.05	-7.38
6125 MHz	-10.37	-10.61	-7.48
6225 MHz	-10.16	-10.04	-7.09
6325 MHz	-10.95	-10.13	-7.52
6425 MHz	-10.00	-10.64	-7.30
6525 MHz	-10.77	-10.30	-7.52
6625 MHz	-10.65	-10.79	-7.71
6725 MHz	-10.29	-10.28	-7.27
6825 MHz	-10.28	-10.42	-7.34
6925 MHz	-10.39	-10.55	-7.46
7025 MHz	-10.74	-10.35	-7.53
7125 MHz	-10.42	-10.84	-7.62

Table 2-9 Antenna Peak Gain per Frequency

	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 – 6425 MHz	-10.16	-10.04	-7.09
6425 – 6525 MHz	-10.00	-10.64	-7.30
6525 – 6875 MHz	-10.29	-10.28	-7.27
6875 – 7125 MHz	-10.39	-10.55	-7.46

Table 2-10. Antenna Peak Gain

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 9 of 122



2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 987594 D02 v01r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

This device supports operation under control of either a low-power indoor access point or standard power access point. Target powers remain identical for both modes of operation for OFDM operation; indoor limits are applied. The worst-case emissions data is shown in this report.

This device supports three configurations: one is with screen open; one is where the screen is half open (90 degrees), and one is with the screen closed. All configurations are tested, and the worst case radiated emissions data is shown in this report.

This device operates in the 5.925-7.125 GHz band when under control of a low power indoor access point. Additionally, the device may operate in the 5.925-6.425 GHz and 6.525-6.875 GHz bands when under control of a standard power access point.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with firmware version F731USQU0AWD7 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 10 of 122

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 987594 D02 v01r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 11 of 122

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precautions were taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height were noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 12 of 122

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 13 of 122

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Contention Based Protocol Conducted Measurements	0.86
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 14 of 122

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	ETS-001	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	ETS-001
-	ETS-002	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	ETS-002
-	AP2-001	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	AP2-001
-	AP2-002	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	AP2-002
-	WL25-1	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	7/29/2022	Annual	7/29/2023	WL40-1
Agilent	N9038A	Power Meter	5/9/2022	Annual	5/9/2023	1328004
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	8/18/2022	Annual	8/18/2023	MY49430494
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2024	121034
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2023	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	8/11/2022	Biennial	8/11/2024	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	9/6/2022	Annual	9/6/2023	MY54490576
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	12/19/2021	Annual	12/19/2022	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/25/2022	Annual	8/25/2023	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	1/14/2022	Biennial	1/14/2024	A042511
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	8/30/2022	Biennial	8/30/2024	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 15 of 122

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF731JPN
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046, 15.407(a)(11)	Maximum Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.3
15.407(a)(8)	Maximum Radiated Output Power	< 24dBm over the frequency band of operation		PASS	Section 7.3
2.1049, 15.407(a)(10)	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands. The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.		PASS	Section 7.2
15.407(a)(8)	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p.		PASS	Section 7.4
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7)		PASS	Section 7.5
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7
15.407(b)(9)	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 16 of 122

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) Per 15.407(a)(7), a device operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands must not have the maximum power spectral density exceed 17 dBm/MHz e.i.r.p., must limit the maximum e.i.r.p. over the frequency band of operation does not exceed 30 dBm, and must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power. Compliance to this clause is addressed via submission of an attestation following Appendix B of KDB 987594 D01 v01r03.
- 5) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 4.7.
- 6) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 17 of 122

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

This section shows only representative plots.


FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 18 of 122

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	5935	2	a	16.49	16.48
	6175	45	a	16.50	16.48
	6415	93	a	16.51	16.48
	5935	2	ax (20MHz)	18.93	18.94
	6175	45	ax (20MHz)	18.93	18.94
	6415	93	ax (20MHz)	18.97	18.99
	5695	3	ax (40MHz)	37.72	37.79
	6165	43	ax (40MHz)	37.64	37.66
	6405	91	ax (40MHz)	37.71	37.65
	5985	7	ax (80MHz)	76.91	76.82
	6145	39	ax (80MHz)	77.02	76.87
	6385	87	ax (80MHz)	76.91	76.95
	6025	15	ax (160MHz)	155.59	155.47
	6185	47	ax (160MHz)	156.03	155.45
	6345	79	ax (160MHz)	156.14	155.35
Band 6	6435	97	a	16.50	16.48
	6475	105	a	16.48	16.47
	6515	113	a	16.51	16.43
	6345	97	ax (20MHz)	18.95	18.90
	6475	105	ax (20MHz)	18.94	18.91
	6515	113	ax (20MHz)	18.94	18.91
	6445	99	ax (40MHz)	37.77	37.67
	6485	107	ax (40MHz)	37.74	37.71
	6525	115	ax (40MHz)	37.73	37.65
	6465	103	ax (80MHz)	76.98	76.82
6505	111	ax (160MHz)	155.83	155.84	
Band 7	6535	117	a	16.47	16.51
	6695	149	a	16.49	16.49
	6875	185	a	16.49	16.46
	6535	117	ax (20MHz)	18.91	18.95
	6695	149	ax (20MHz)	18.99	18.89
	6875	185	ax (20MHz)	18.90	18.96
	6565	123	ax (40MHz)	37.72	37.74
	6725	155	ax (40MHz)	37.75	37.67
	6845	179	ax (40MHz)	37.63	37.60
	6545	119	ax (80MHz)	77.07	76.88
	6705	151	ax (80MHz)	76.98	76.76
	6865	183	ax (80MHz)	77.12	76.93
	6665	143	ax (160MHz)	156.18	155.66
	6825	175	ax (160MHz)	156.22	155.60
	Band 8	6895	189	a	16.45
6995		209	a	16.49	16.49
7115		233	a	16.49	16.49
6895		189	ax (20MHz)	18.88	18.95
6995		209	ax (20MHz)	18.92	18.93
7115		233	ax (20MHz)	18.92	18.95
6885		187	ax (40MHz)	37.76	37.67
7005		211	ax (40MHz)	37.68	37.63
7085		227	ax (40MHz)	37.68	37.79
6945		199	ax (80MHz)	76.94	77.01
7025	215	ax (80MHz)	76.97	76.84	
6985	207	ax (160MHz)	155.84	155.53	


Table 7-2. Occupied Bandwidth Test Results

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 19 of 122

7.2.1 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 5)

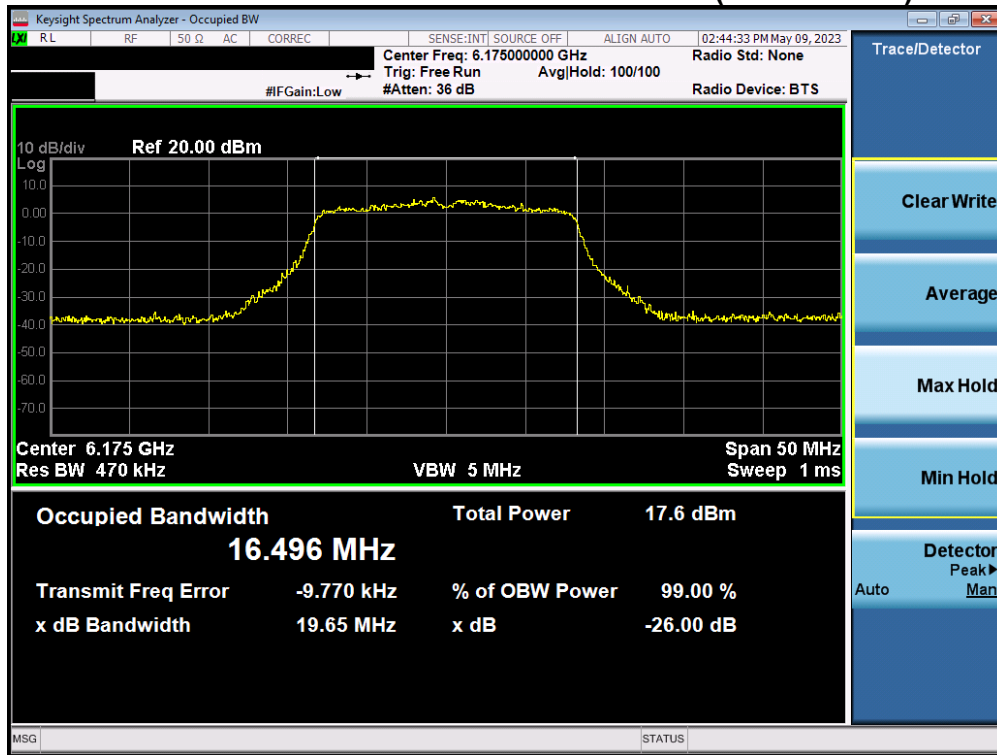


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45)

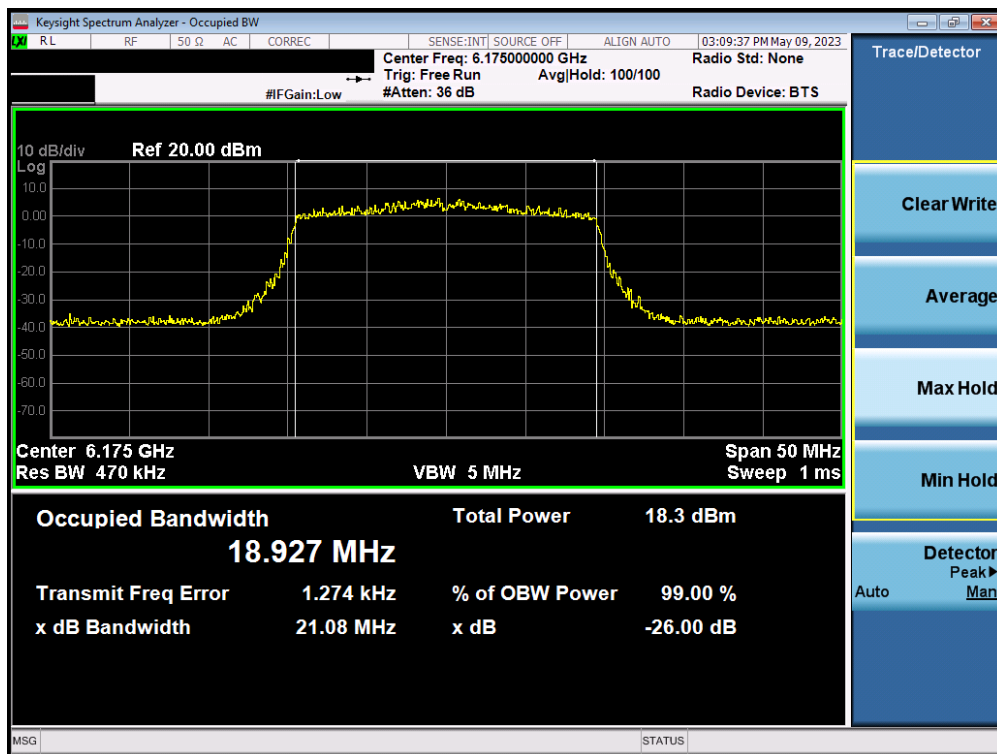


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 20 of 122

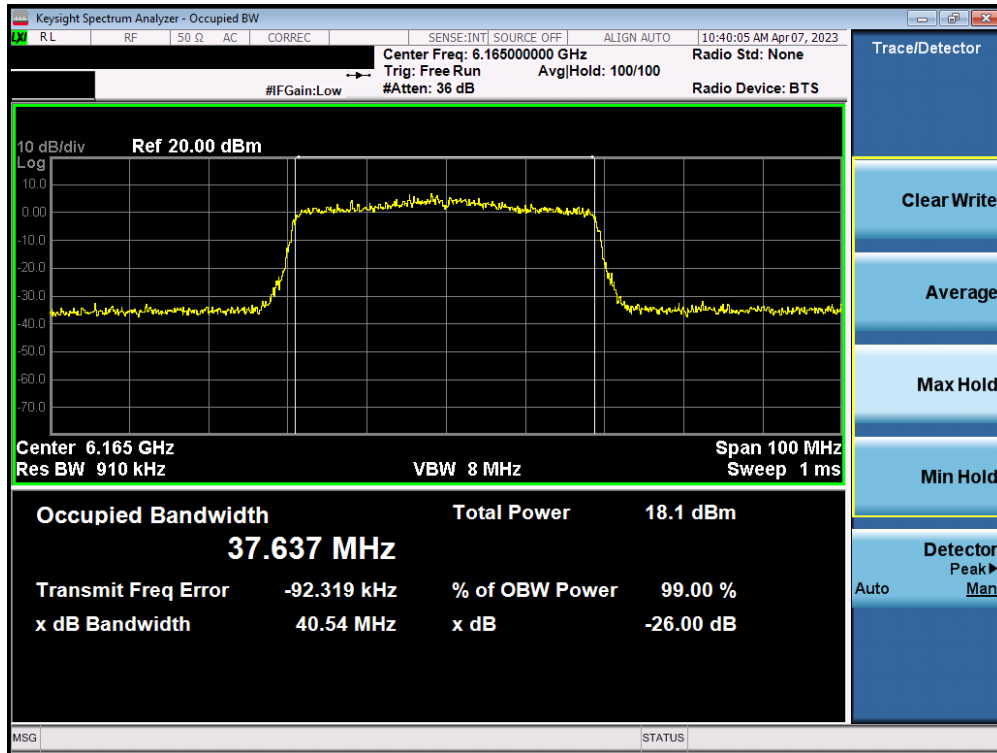


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

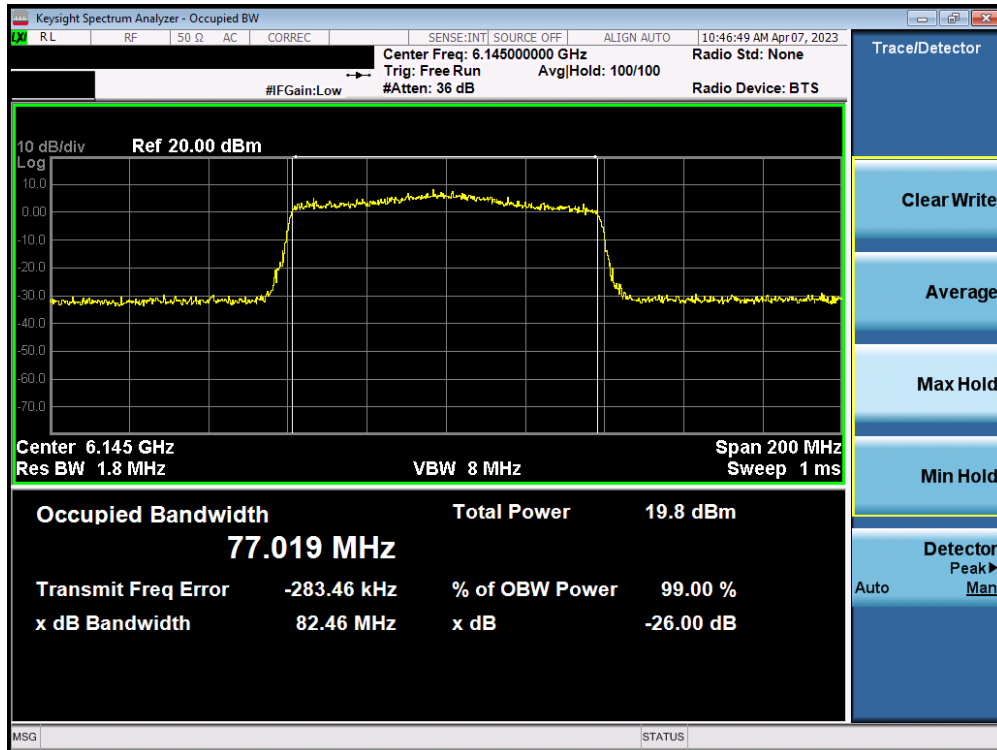

Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39)


FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 21 of 122

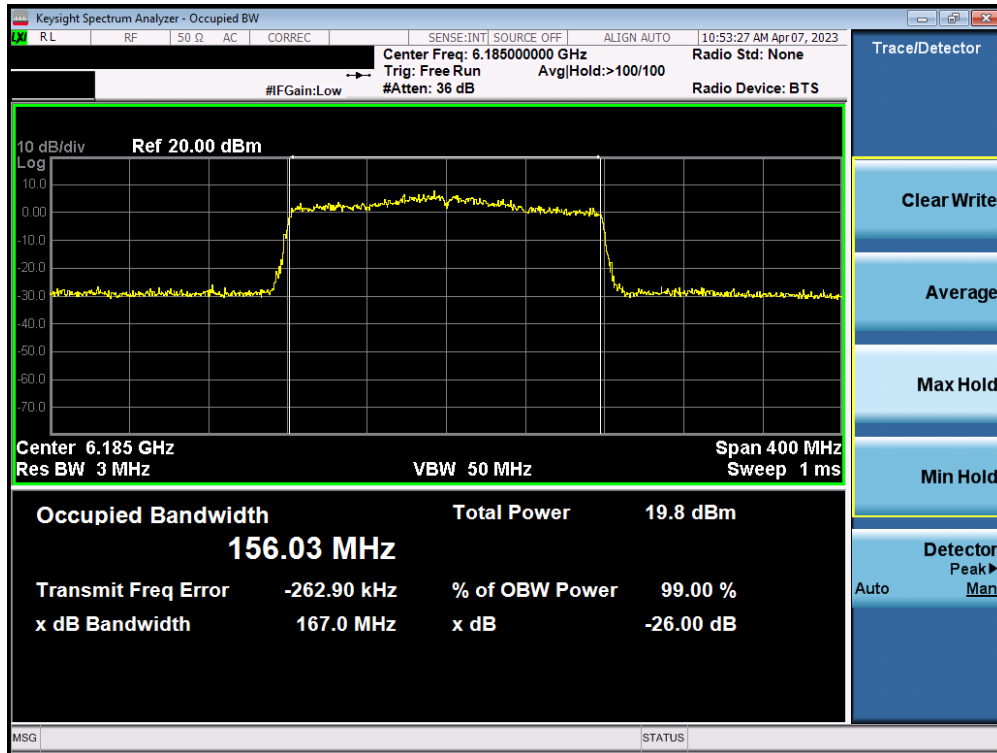


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 22 of 122

7.2.2 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 6)

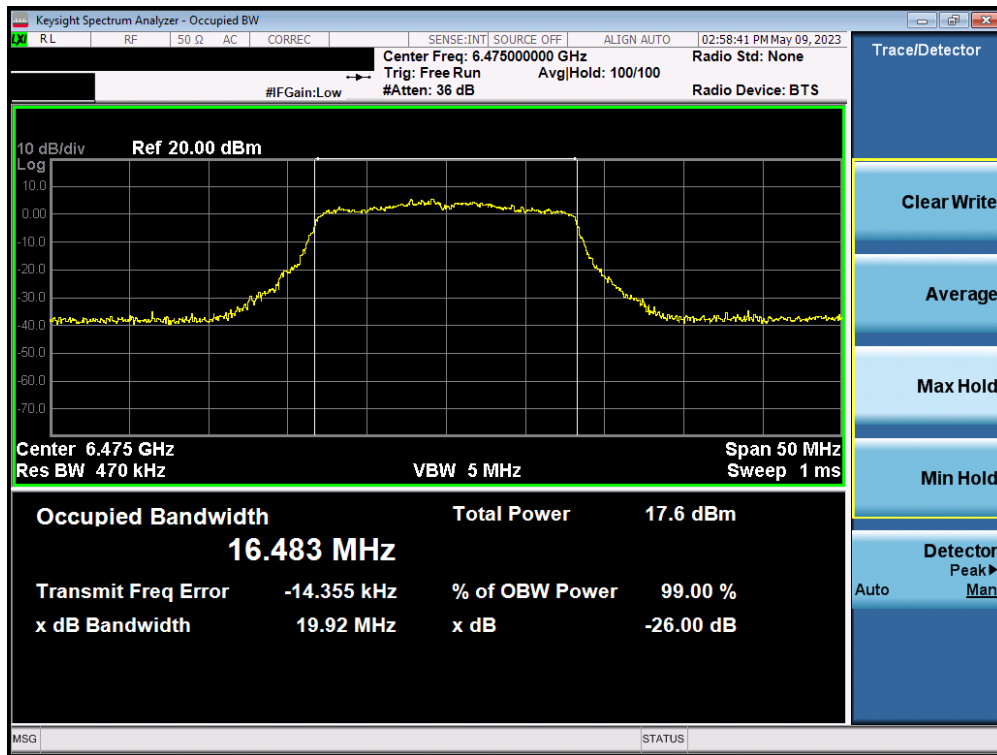


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 105)

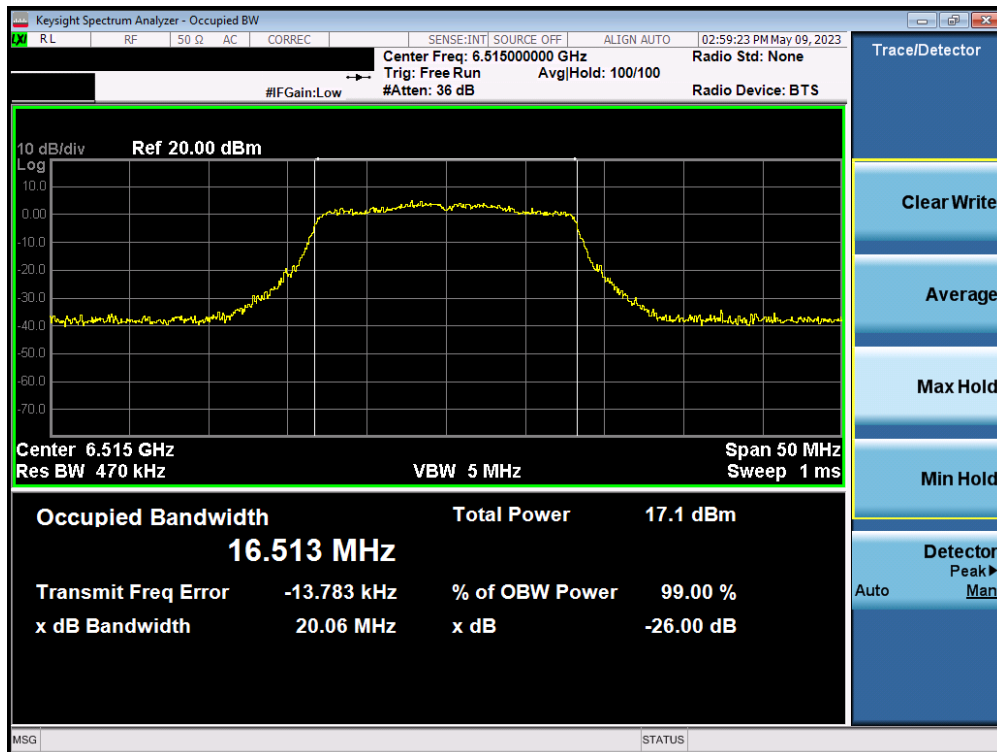


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 6) – Ch. 113)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 23 of 122

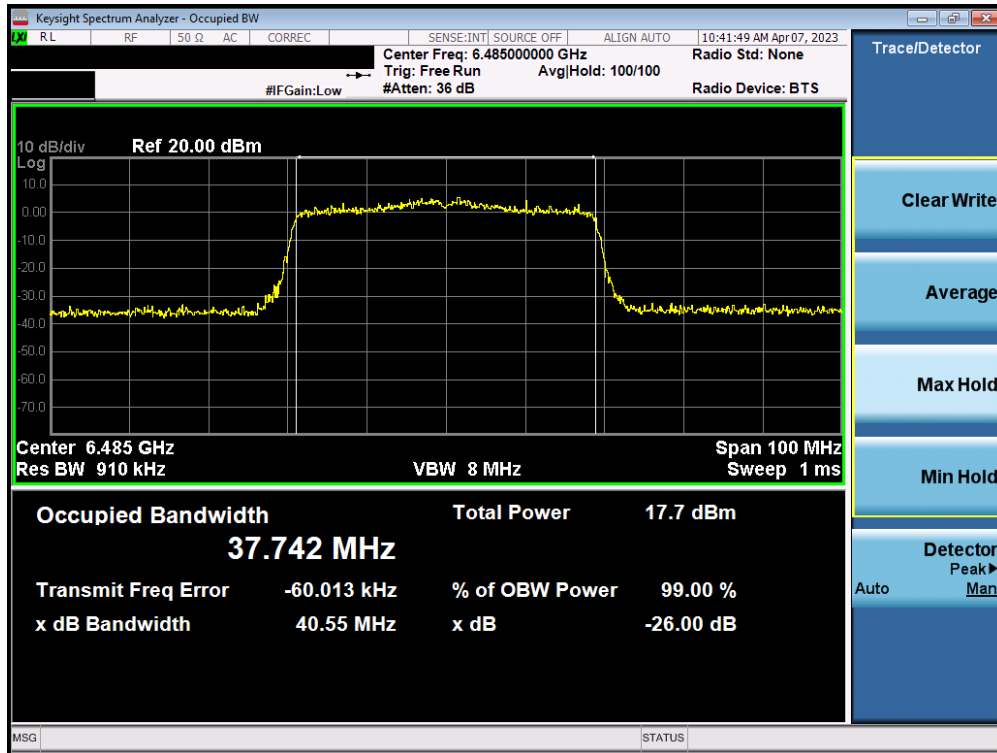


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

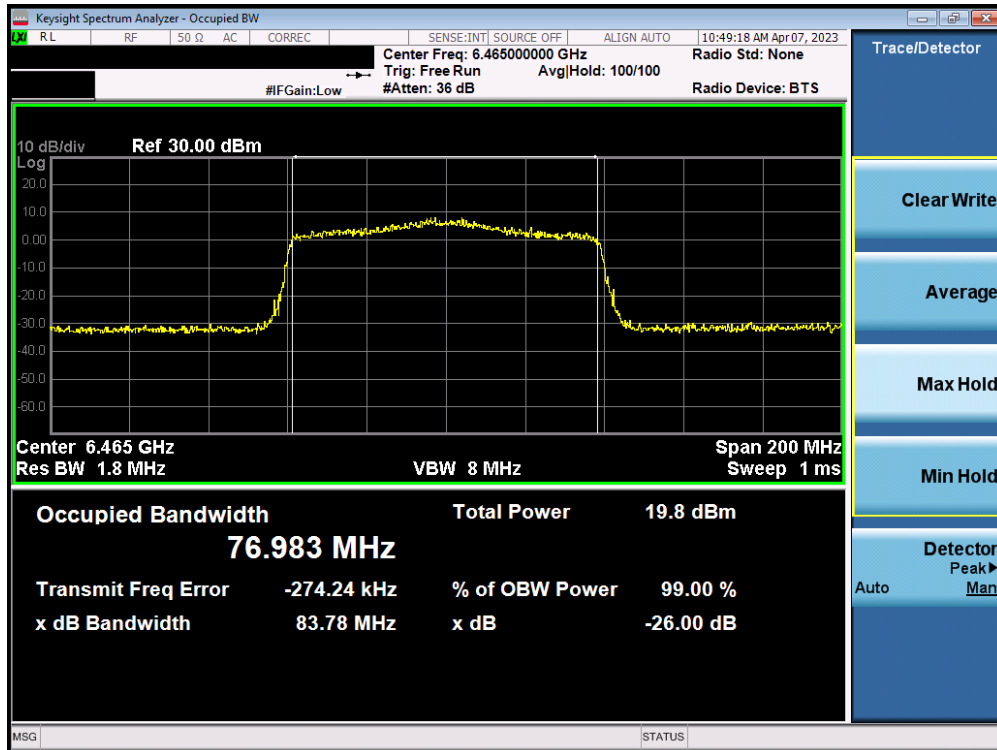

Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 6) – Ch. 103)


FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 24 of 122

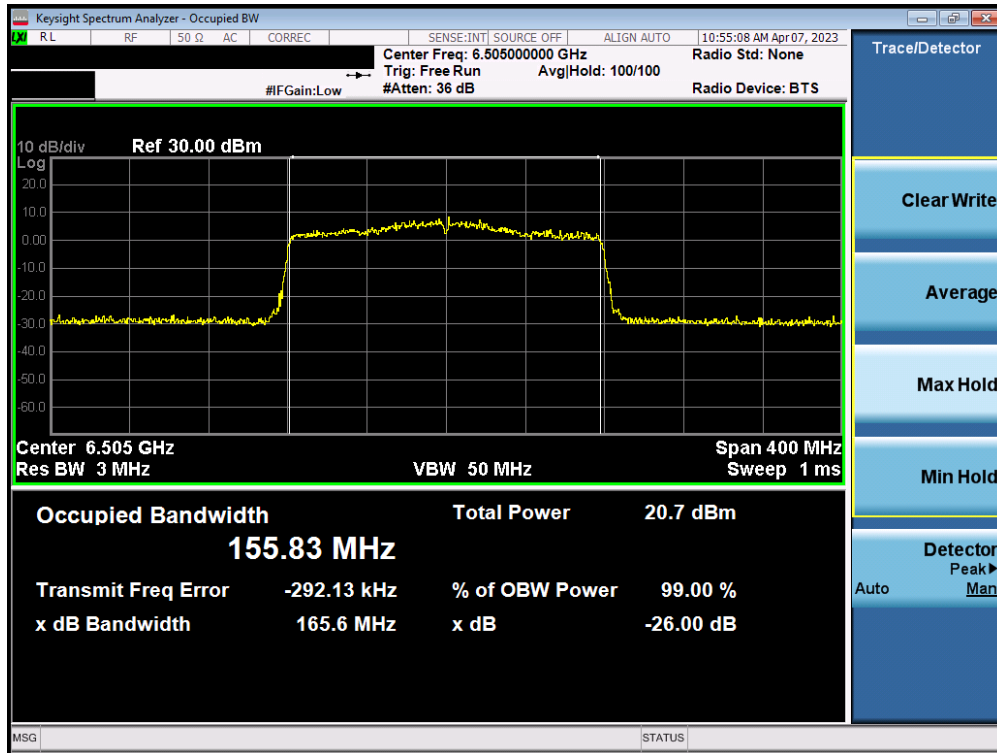


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 25 of 122

7.2.3 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 7)

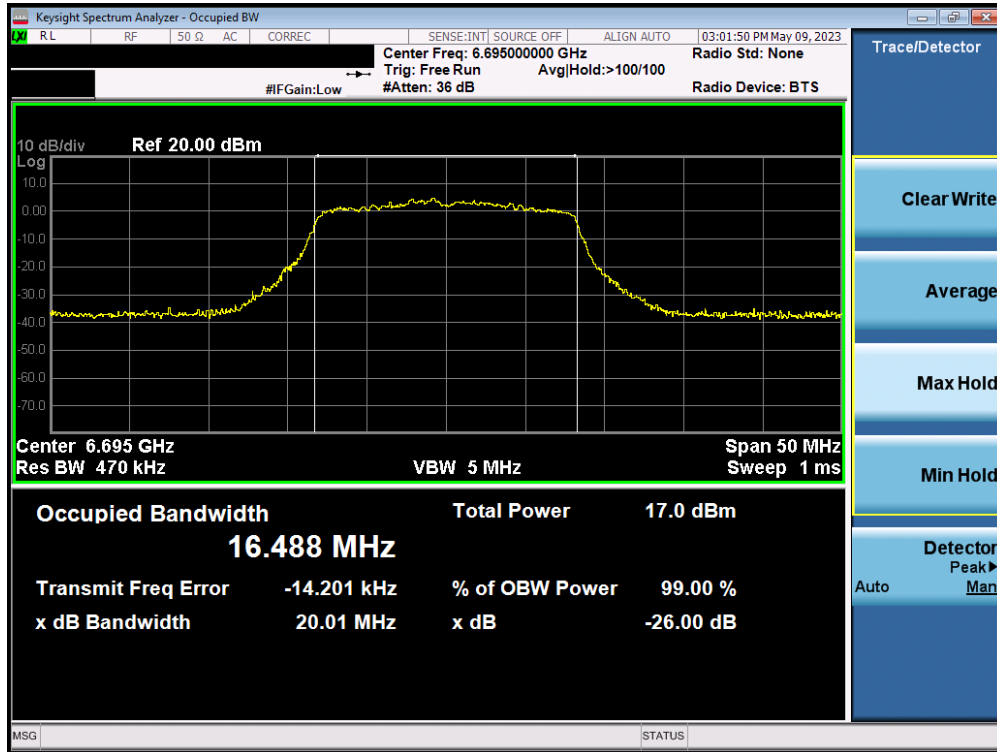


Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149)

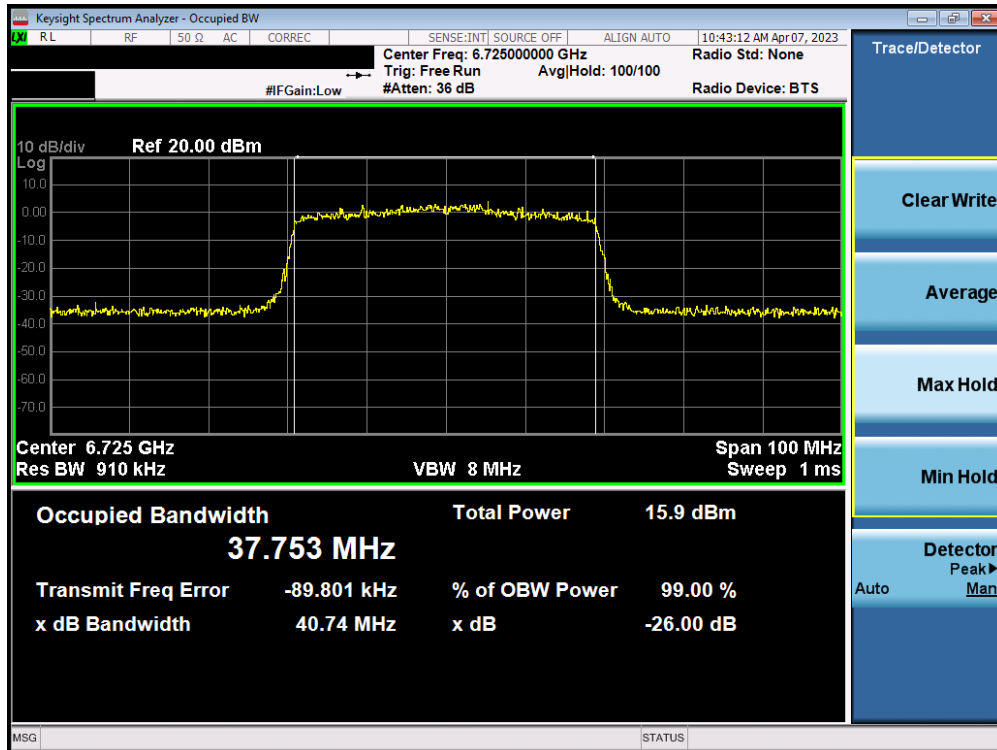


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 26 of 122

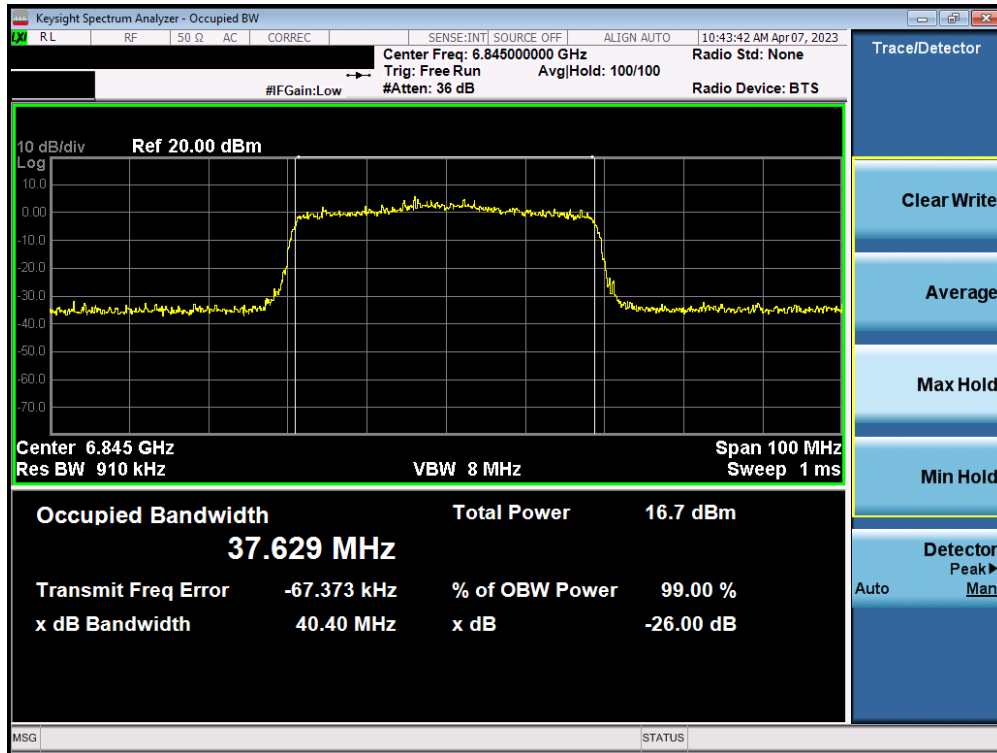


Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 179)

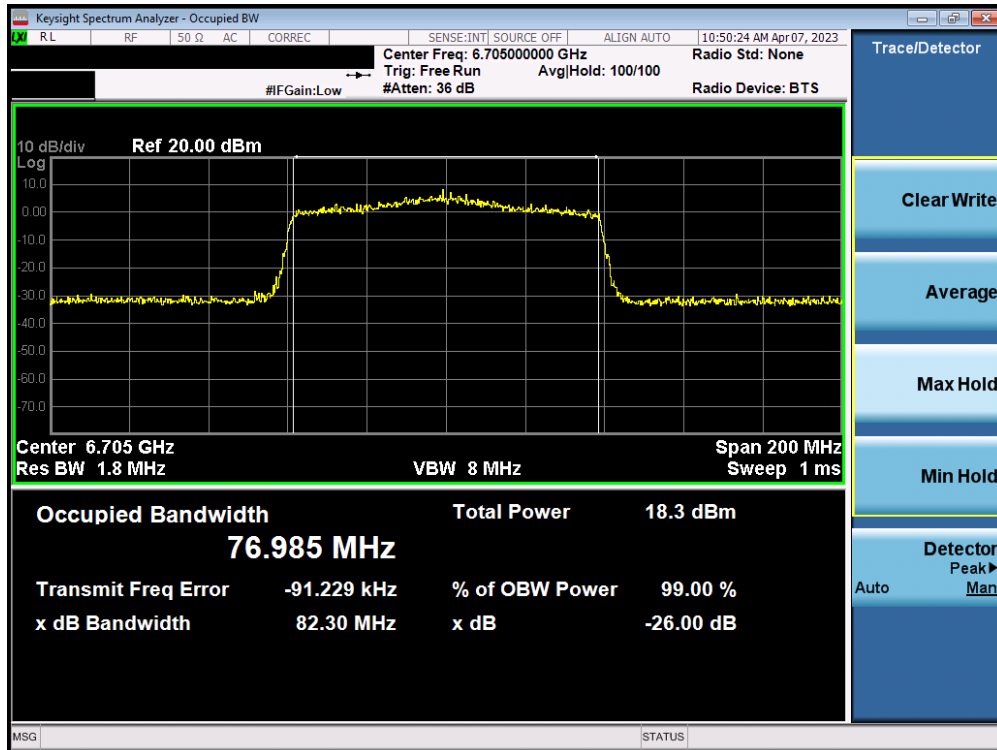

Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 7) – Ch. 151)


FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 27 of 122

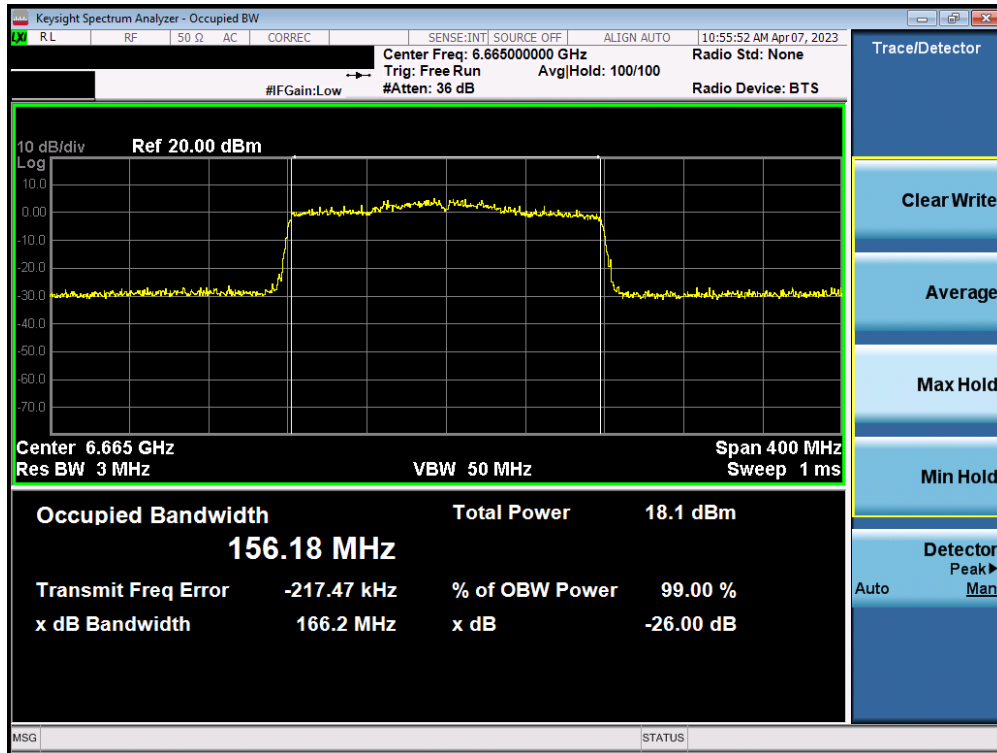


Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 28 of 122

7.2.4 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 8)

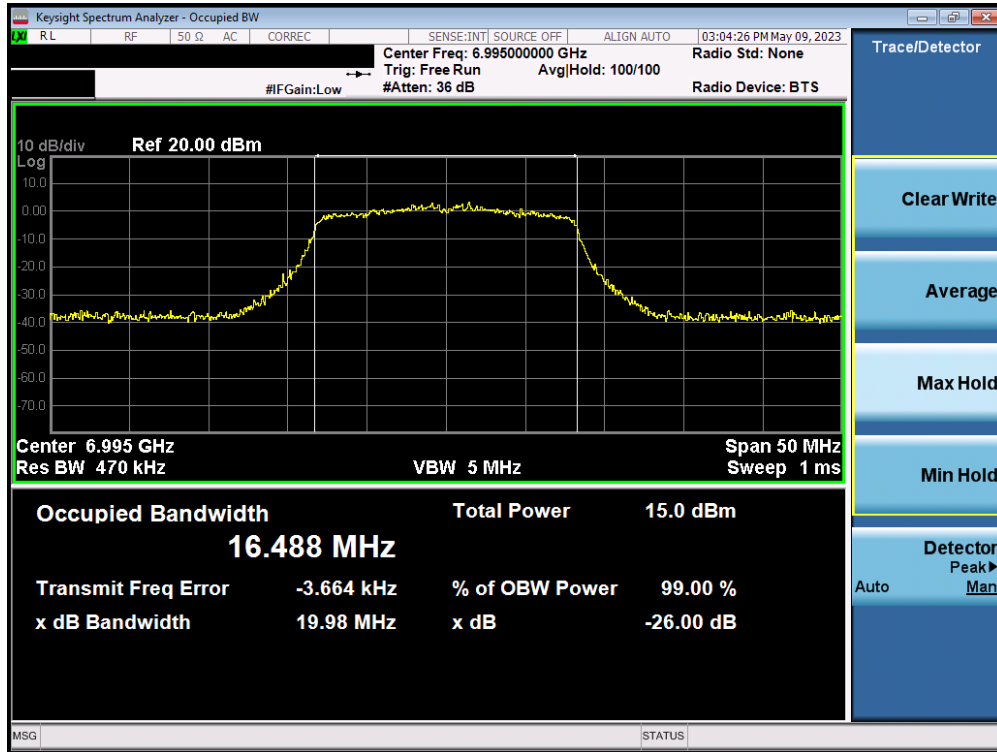


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 209)

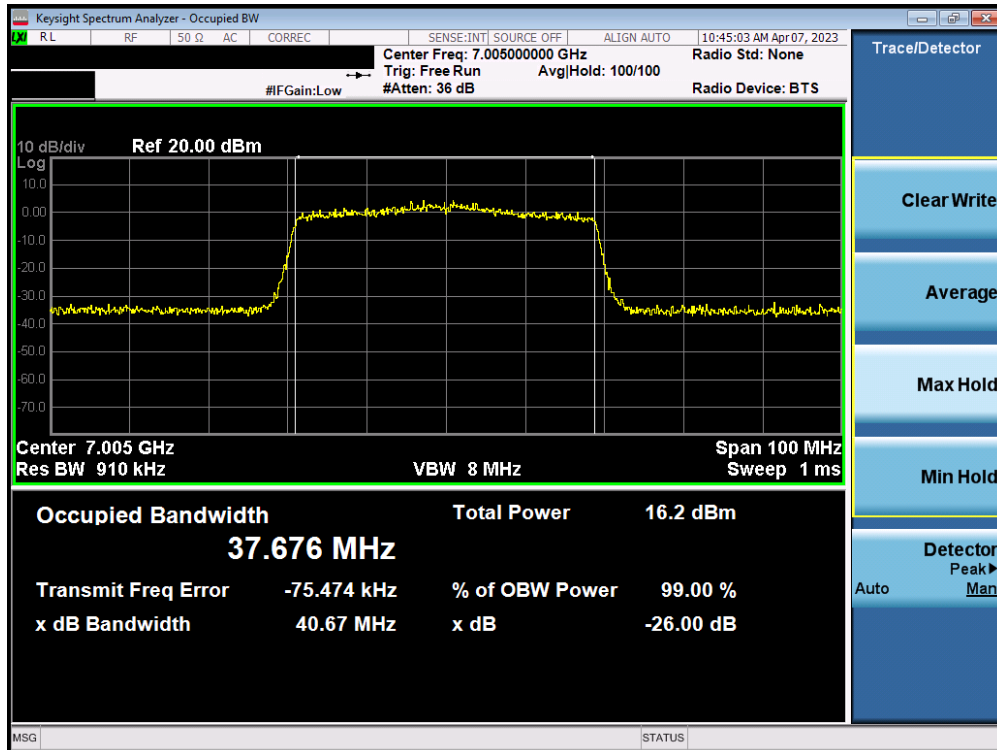


Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 29 of 122

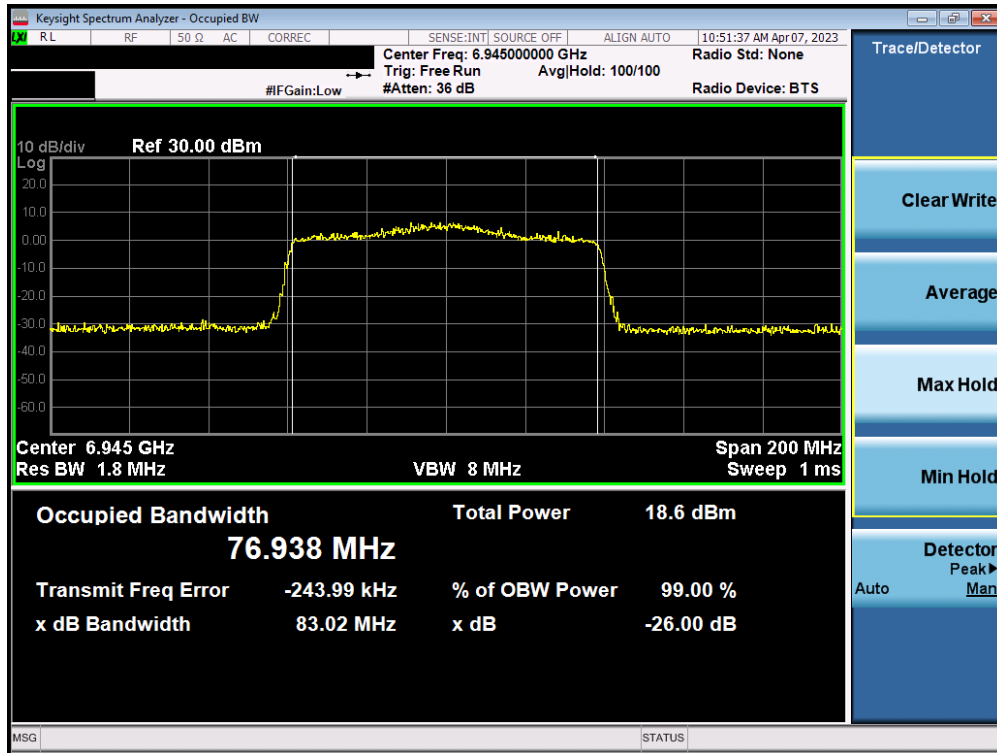


Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

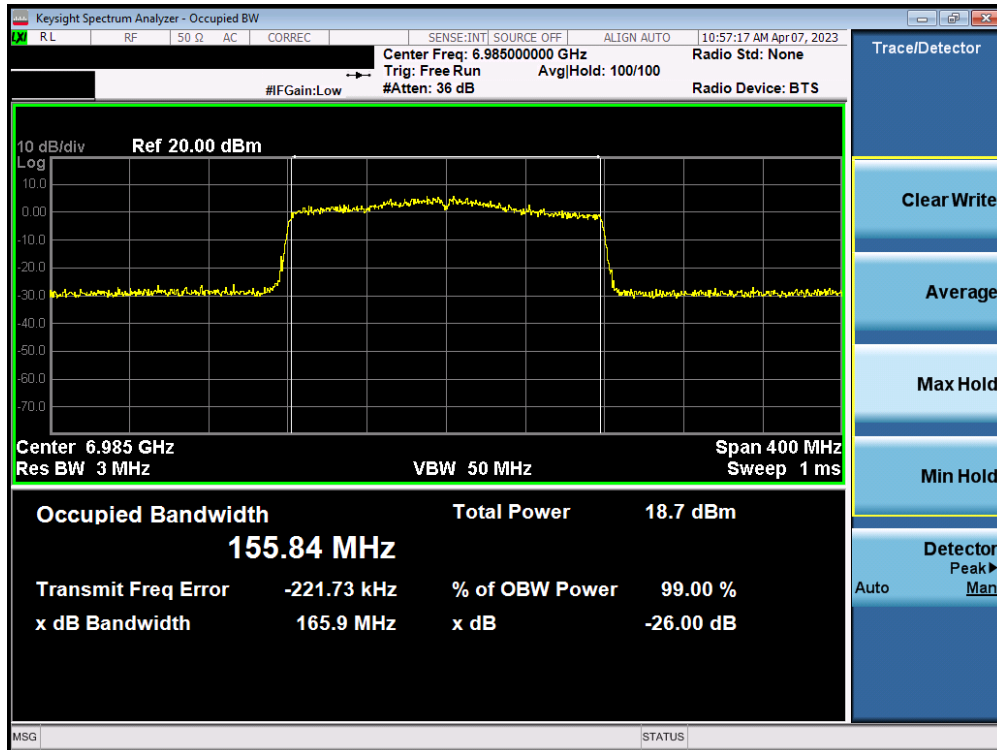


Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 30 of 122

7.2.5 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 5)

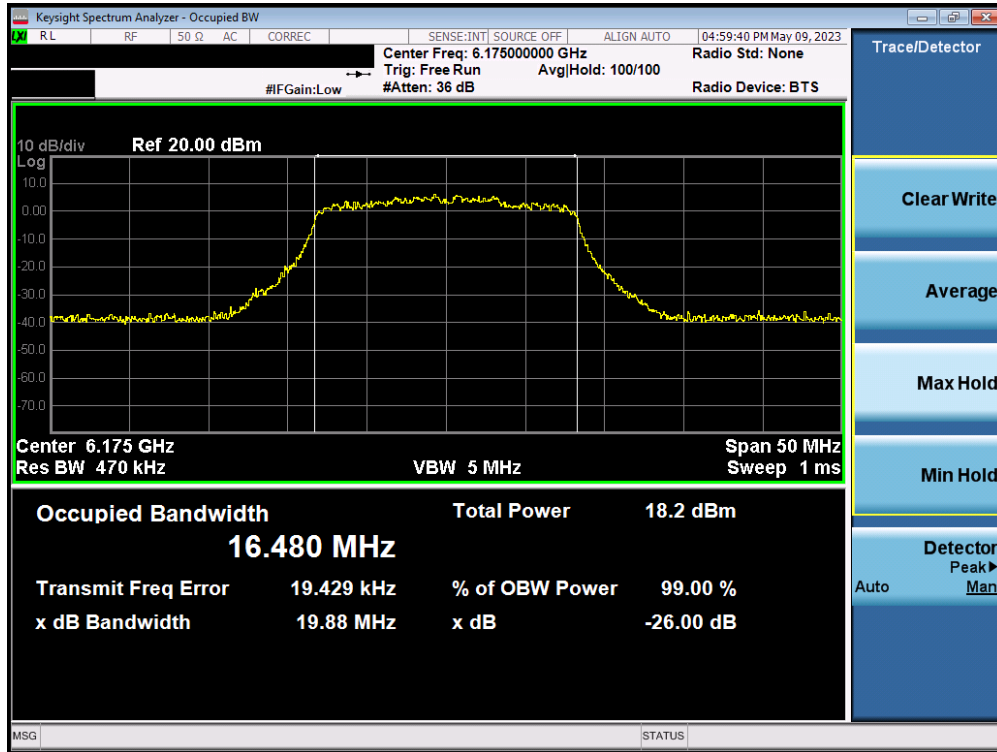


Plot 7-20. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45)

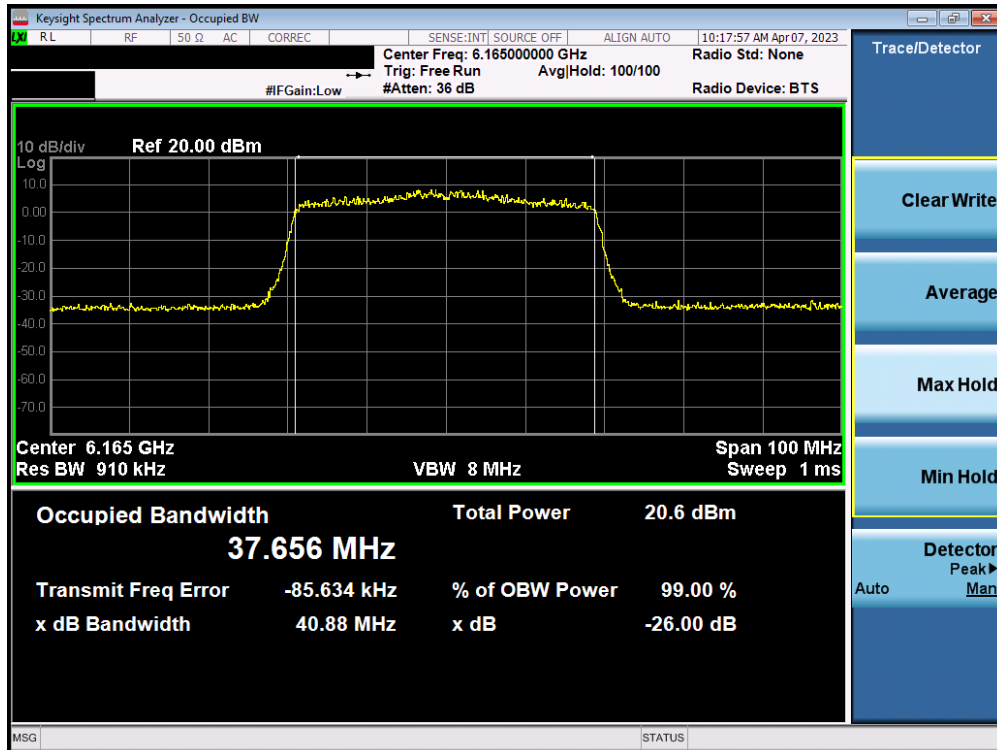


Plot 7-21. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 31 of 122

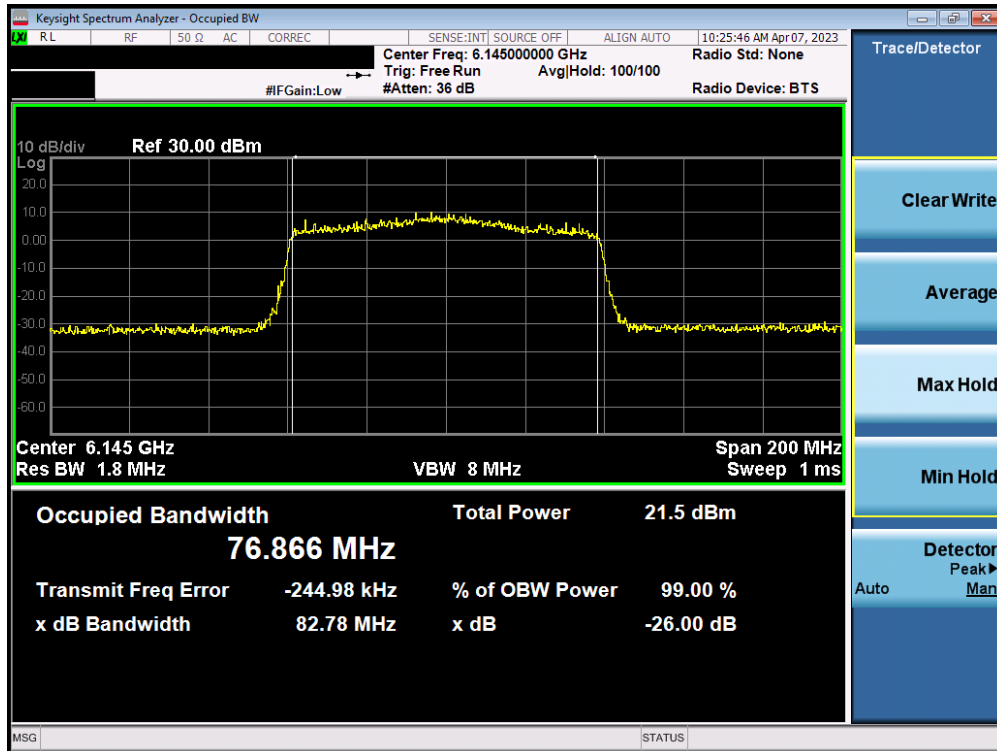


Plot 7-22. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

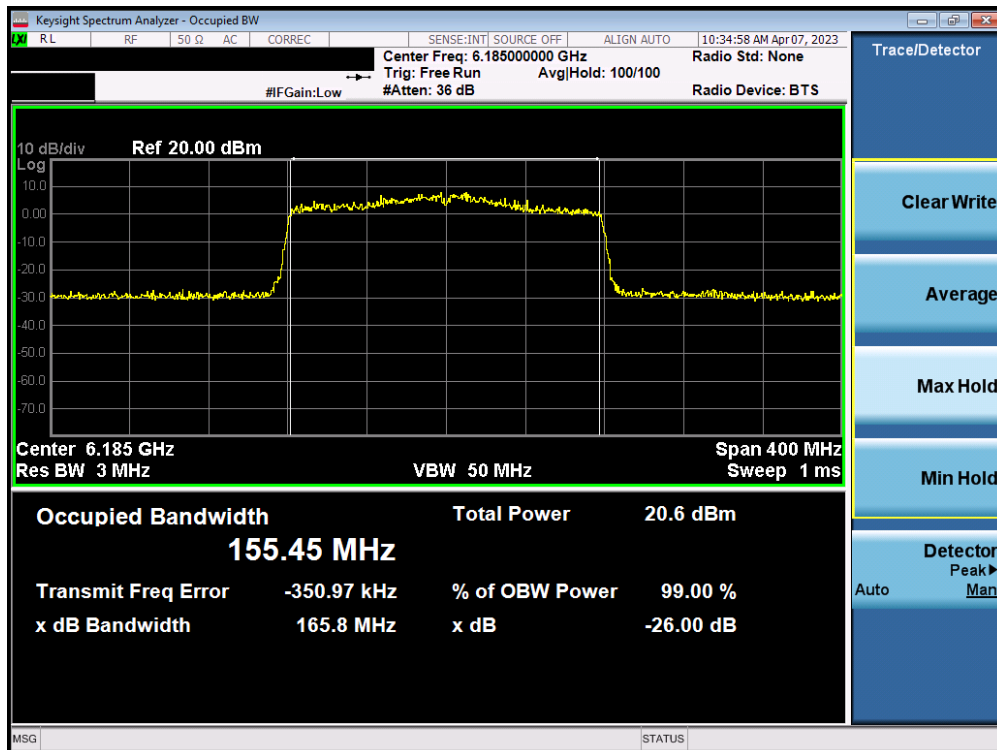


Plot 7-23. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 32 of 122

7.2.6 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 6)

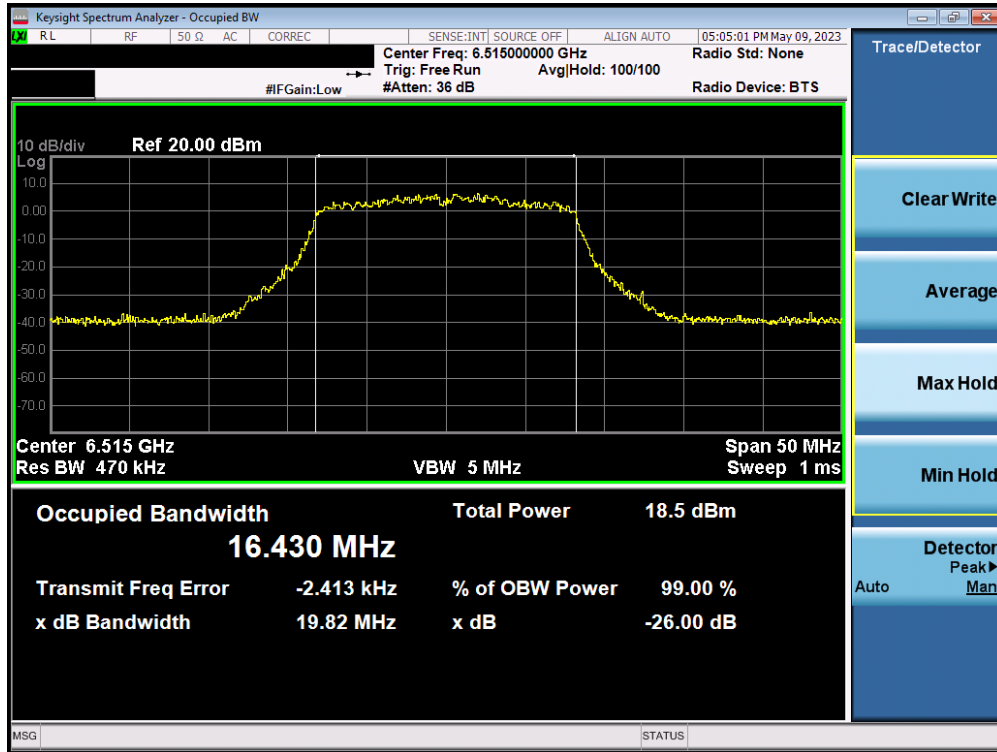


Plot 7-24. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 113)

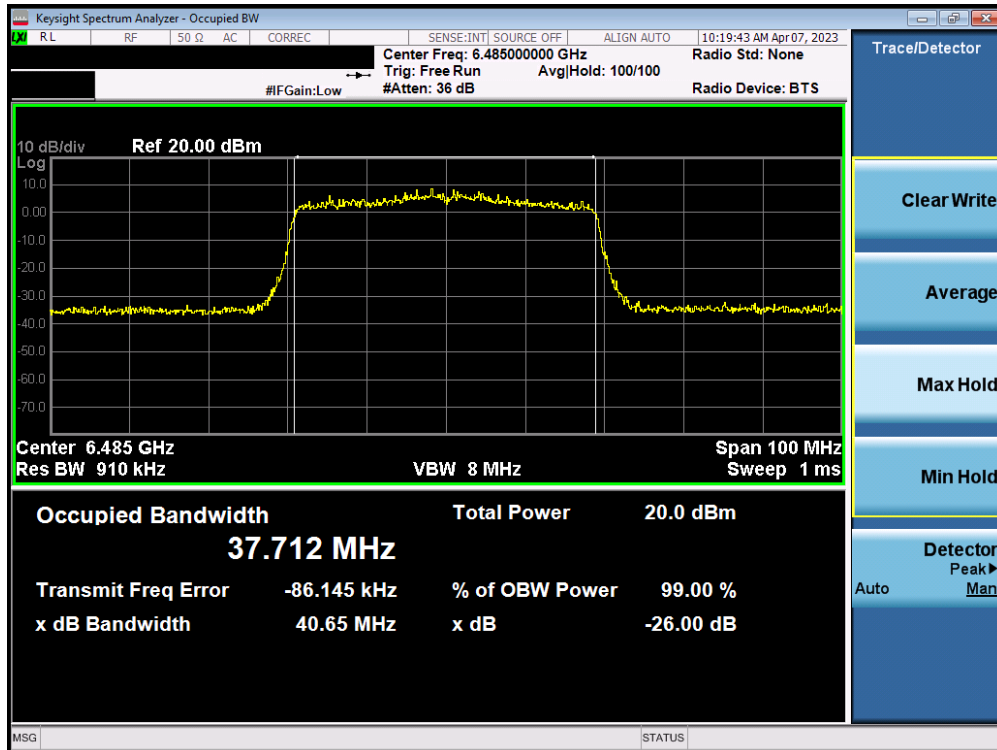


Plot 7-25. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 33 of 122

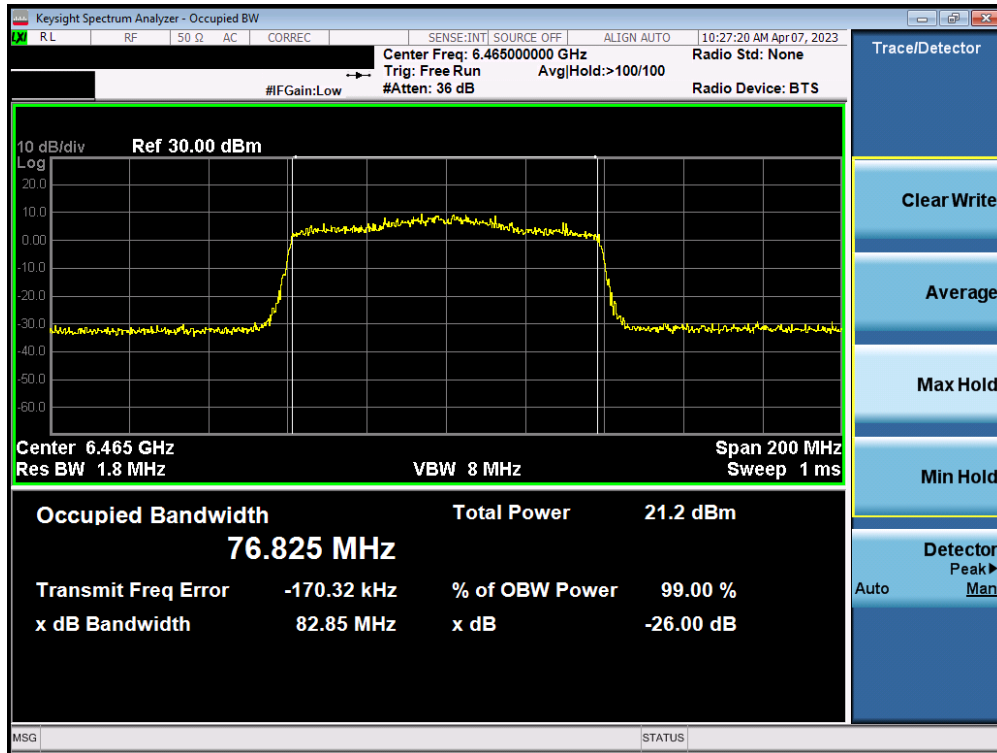


Plot 7-26. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 6) – Ch. 103)

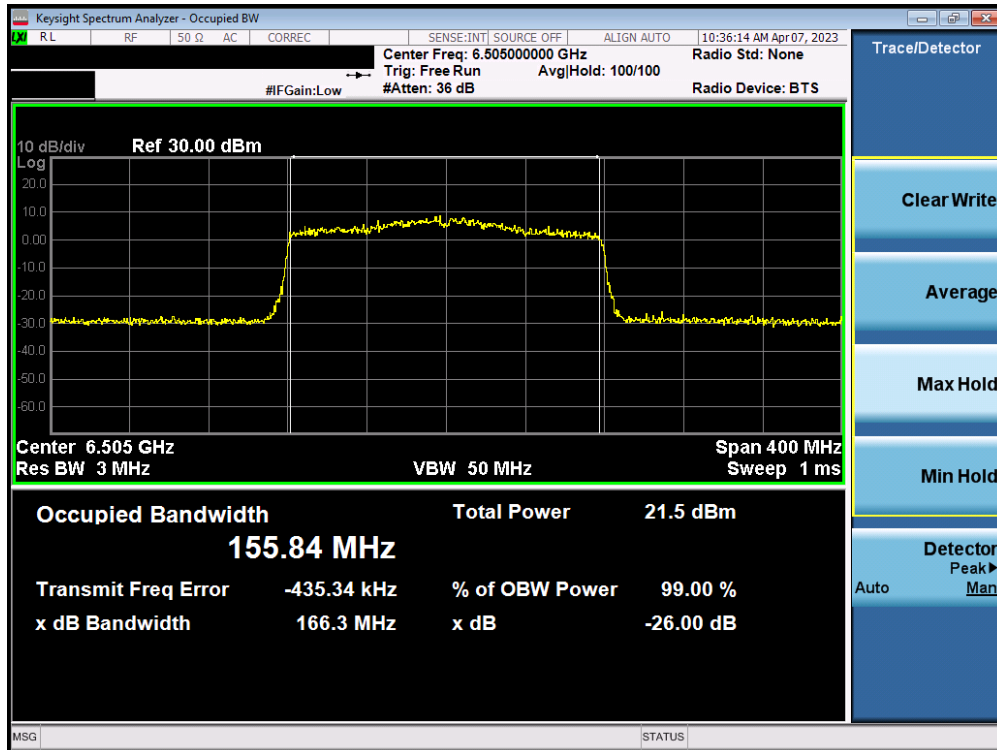


Plot 7-27. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 34 of 122

7.2.7 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 7)

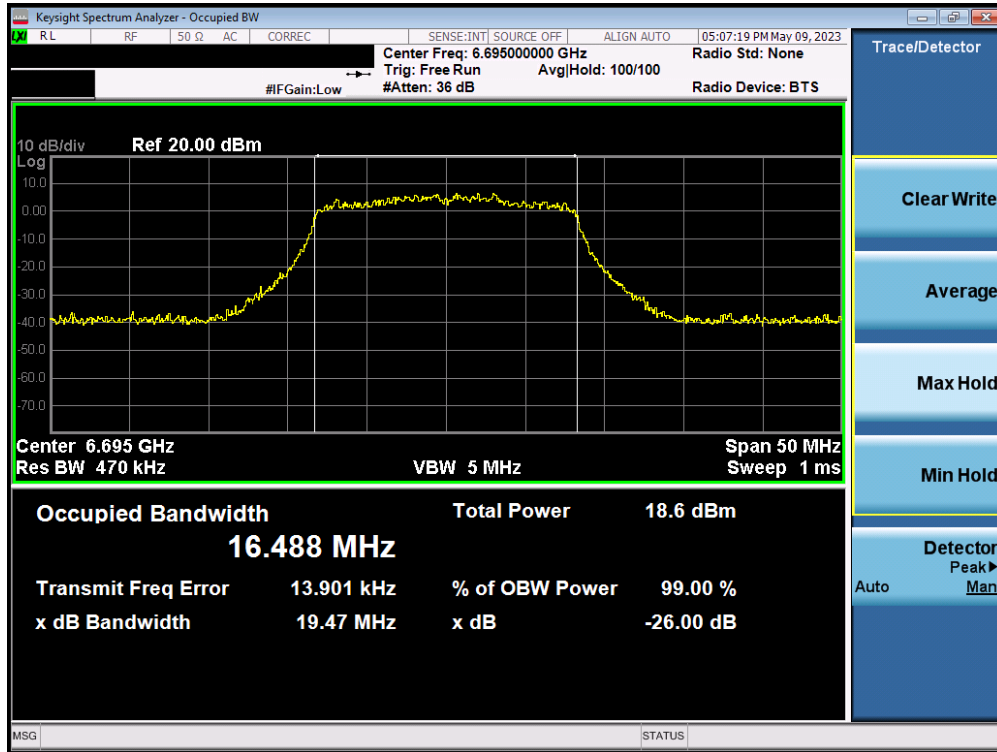


Plot 7-28. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 149)

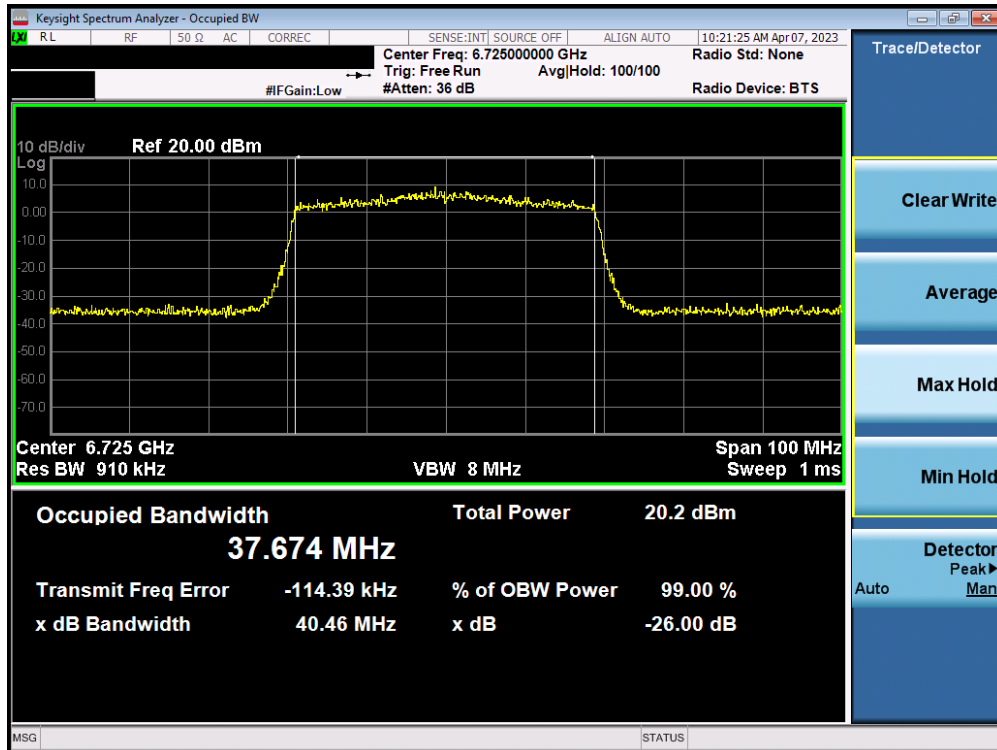


Plot 7-29. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 35 of 122

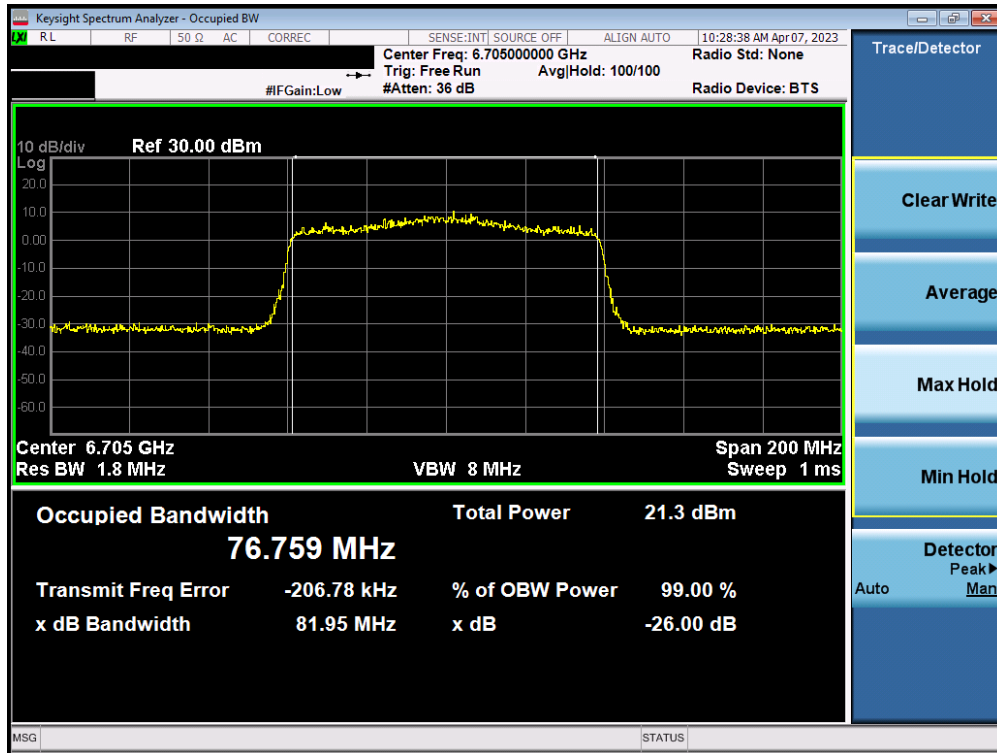


Plot 7-30. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

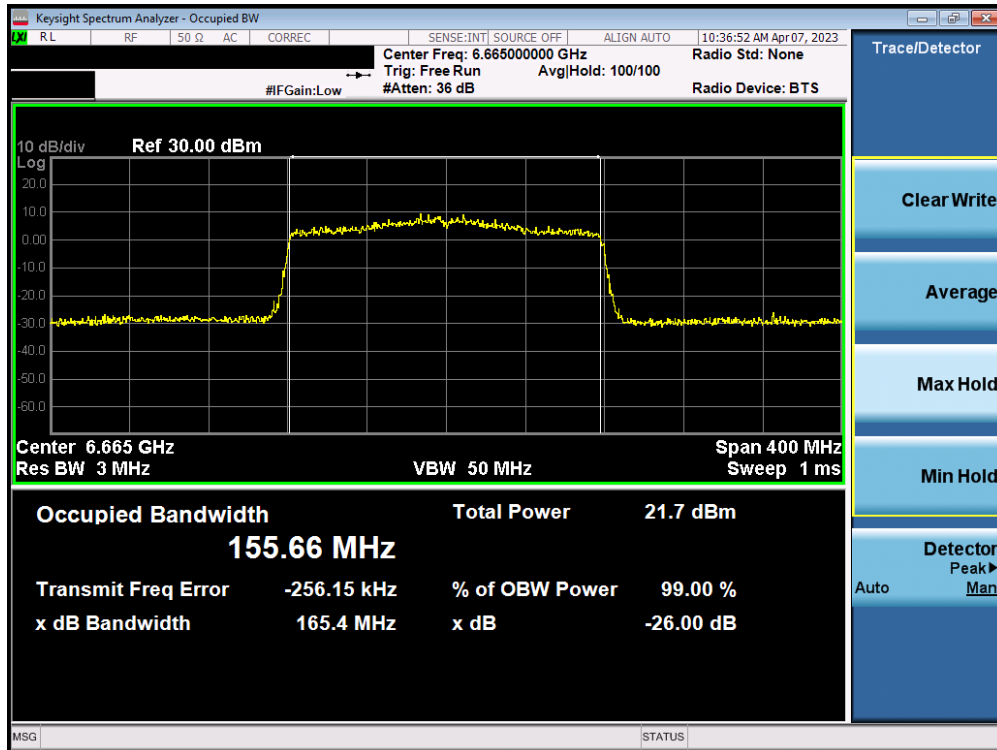


Plot 7-31. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 36 of 122

7.2.8 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 8)

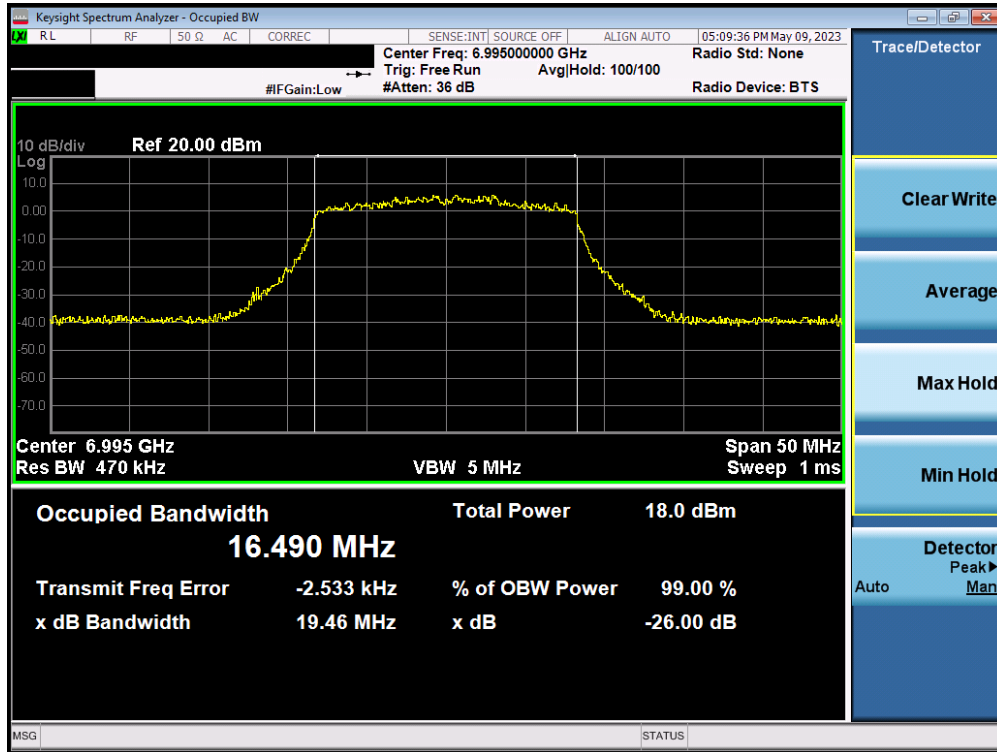


Plot 7-32. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 209)

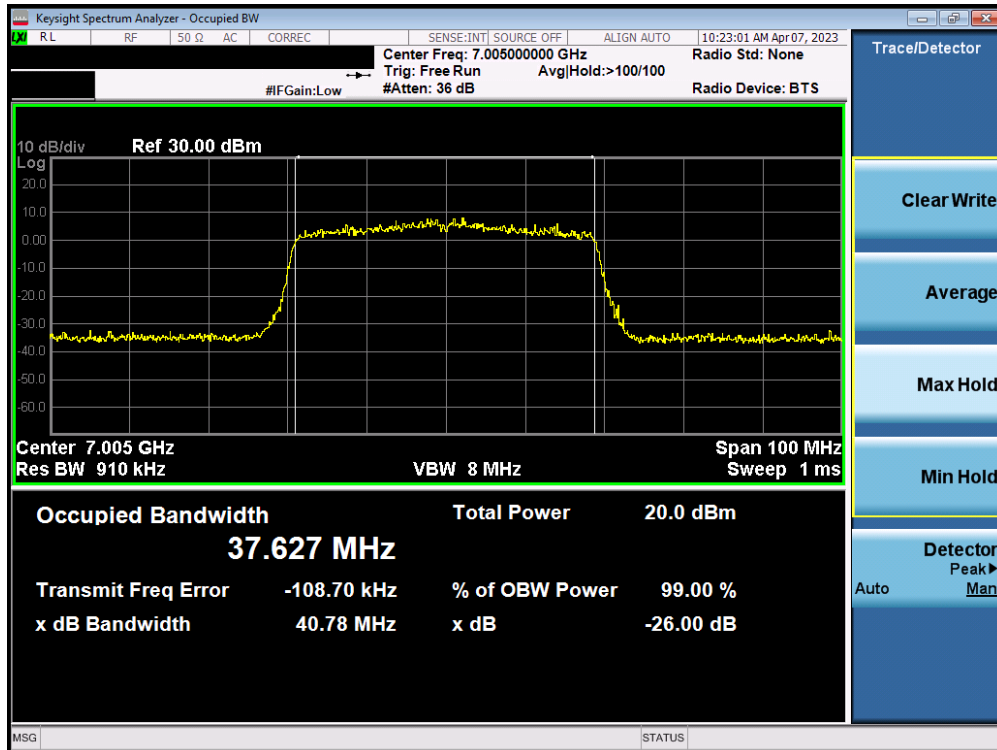


Plot 7-33. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 37 of 122

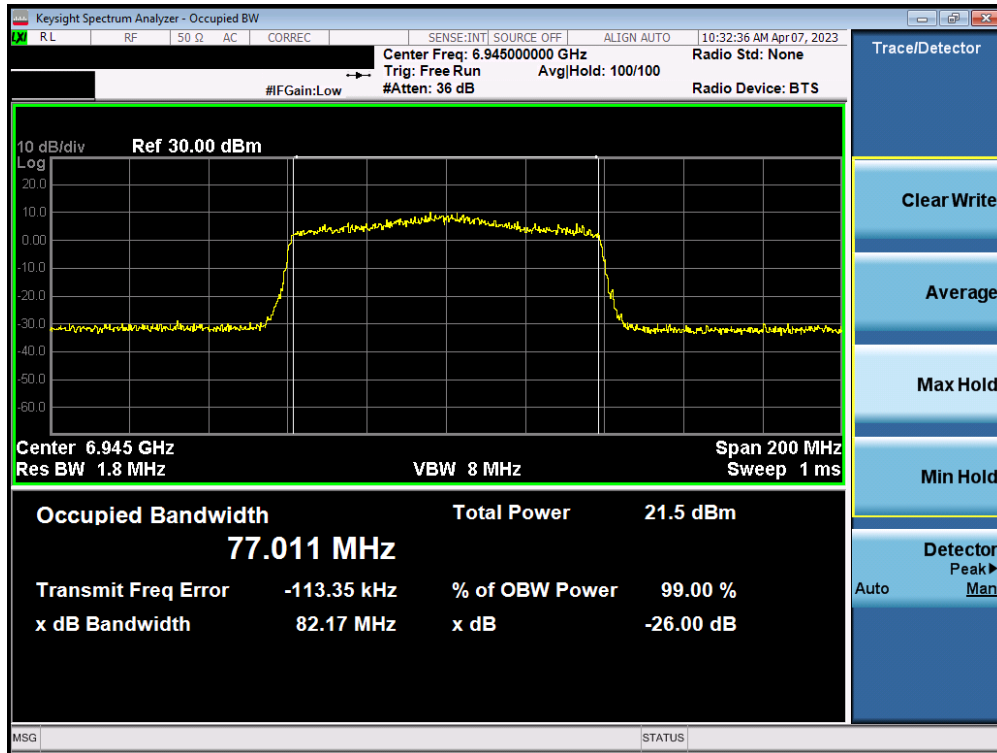

Plot 7-34. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

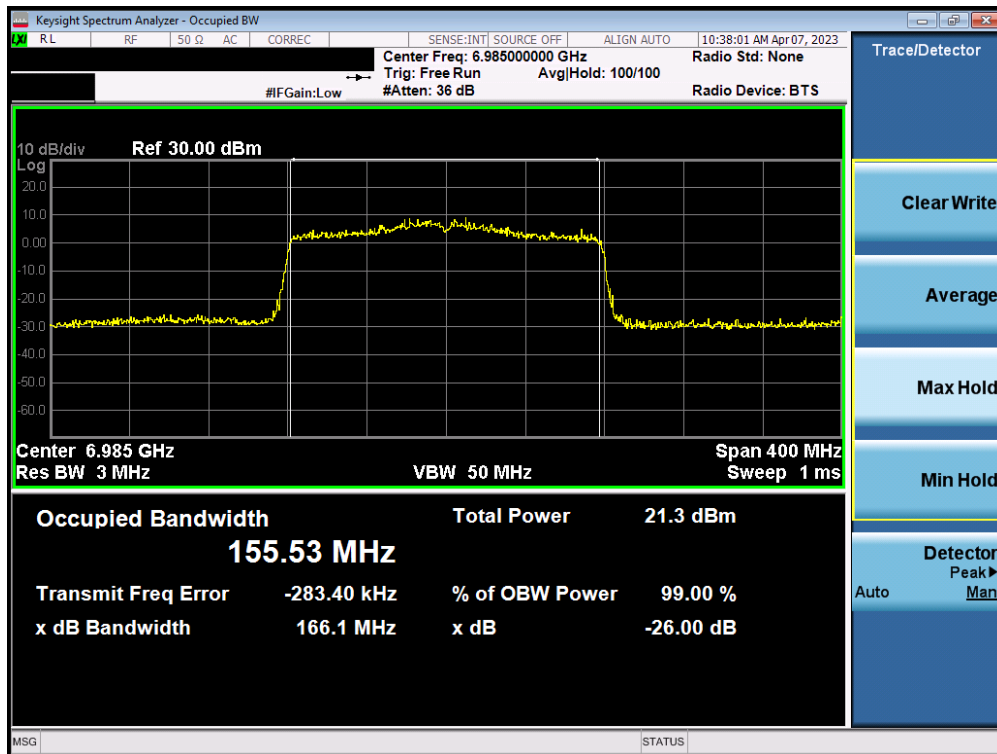

Plot 7-35. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 38 of 122

7.3 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm. For client devices operating under the control of a standard power access point, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

Compliance for this device while operating under the control of either an indoor low power access point or a standard power access point is demonstrated by applying the tighter low power indoor access point limit of 24dBm e.i.r.p. for both cases.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 39 of 122

MIMO Maximum Conducted Output Power Measurements

6GHz (20MHz Bandwidth)	6GHz (20MHz) 802.11a Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5935	2	10.99	10.64	13.83	-7.09	6.74	24.0	-17.26
	6175	45	10.89	10.45	13.69	-7.09	6.60	24.0	-17.40
	6415	93	10.43	10.84	13.65	-7.09	6.56	24.0	-17.44
	6435	97	10.31	10.98	13.67	-7.30	6.37	24.0	-17.63
	6475	105	10.42	10.64	13.54	-7.30	6.24	24.0	-17.76
	6515	113	10.65	10.86	13.77	-7.30	6.47	24.0	-17.53
	6535	117	10.74	10.98	13.87	-7.27	6.60	24.0	-17.40
	6695	149	10.31	10.99	13.67	-7.27	6.40	24.0	-17.60
6875	185	10.38	10.98	13.70	-7.27	6.43	24.0	-17.57	
6895	189	10.32	10.95	13.66	-7.46	6.20	24.0	-17.80	
6995	209	9.17	10.87	13.11	-7.46	5.65	24.0	-18.35	
7115	233	9.75	10.97	13.41	-7.46	5.95	24.0	-18.05	

Table 7-3. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	6GHz (20MHz) 802.11ax Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5935	2	10.99	10.68	13.85	-7.09	6.76	24.0	-17.2
	6175	45	10.92	10.39	13.67	-7.09	6.58	24.0	-17.4
	6415	93	10.55	10.52	13.55	-7.09	6.46	24.0	-17.5
	6435	97	10.59	10.79	13.70	-7.30	6.40	24.0	-17.6
	6475	105	10.73	10.55	13.65	-7.30	6.35	24.0	-17.7
	6515	113	10.59	10.75	13.68	-7.30	6.38	24.0	-17.6
	6535	117	10.61	10.64	13.64	-7.27	6.37	24.0	-17.6
	6695	149	10.42	10.99	13.72	-7.27	6.45	24.0	-17.6
6875	185	10.55	10.88	13.73	-7.27	6.46	24.0	-17.5	
6895	189	10.53	10.98	13.77	-7.46	6.31	24.0	-17.7	
6995	209	9.13	10.78	13.04	-7.46	5.58	24.0	-18.4	
7115	233	10.17	10.99	13.61	-7.46	6.15	24.0	-17.9	

Table 7-4. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 40 of 122

6GHz (40MHz Bandwidth)	6GHz (40MHz) 802.11ax Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	10.77	9.57	13.22	-7.09	6.13	24.0	-17.87
	6085	27	10.93	9.94	13.47	-7.09	6.38	24.0	-17.62
	6165	43	10.98	10.07	13.56	-7.09	6.47	24.0	-17.53
	6285	67	10.99	10.13	13.59	-7.09	6.50	24.0	-17.50
	6405	91	10.45	10.74	13.61	-7.09	6.52	24.0	-17.48
	6445	99	10.39	10.39	13.40	-7.30	6.10	24.0	-17.90
	6485	107	10.5	10.49	13.51	-7.30	6.21	24.0	-17.79
	6525	115	10.48	10.41	13.46	-7.30	6.16	24.0	-17.84
6565	123	10.63	10.45	13.55	-7.27	6.28	24.0	-17.72	
6685	147	10.61	10.99	13.81	-7.27	6.54	24.0	-17.46	
6725	155	8.88	10.98	13.07	-7.27	5.80	24.0	-18.20	
6845	179	9.66	10.99	13.39	-7.27	6.12	24.0	-17.88	
6885	187	10.16	10.98	13.60	-7.46	6.14	24.0	-17.86	
7005	211	9.31	10.74	13.09	-7.46	5.63	24.0	-18.37	
7085	227	9.95	10.99	13.51	-7.46	6.05	24.0	-17.95	

Table 7-5. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	6GHz (80MHz) 802.11ax Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	11.82	11.14	14.50	-7.09	7.41	24.0	-16.59
	6065	23	11.46	10.46	14.00	-7.09	6.91	24.0	-17.09
	6145	39	11.81	11.59	14.71	-7.09	7.62	24.0	-16.38
	6305	71	11.98	10.69	14.39	-7.09	7.30	24.0	-16.70
	6385	87	11.99	10.48	14.31	-7.09	7.22	24.0	-16.78
	6465	103	11.86	11.62	14.75	-7.30	7.45	24.0	-16.55
	6545	119	11.99	11.67	14.84	-7.27	7.57	24.0	-16.43
	6705	151	11.27	11.99	14.66	-7.27	7.39	24.0	-16.61
6785	167	11.17	11.84	14.53	-7.27	7.26	24.0	-16.74	
6865	183	10.34	11.78	14.13	-7.27	6.86	24.0	-17.14	
6945	199	10.84	11.99	14.46	-7.46	7.00	24.0	-17.00	
7025	215	10.03	11.93	14.09	-7.46	6.63	24.0	-17.37	

Table 7-6. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	6GHz (160MHz) 802.11ax Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	11.72	10.28	14.07	-7.09	6.98	24.0	-17.02
	6185	47	11.26	10.83	14.06	-7.09	6.97	24.0	-17.03
	6345	79	11.46	10.71	14.11	-7.09	7.02	24.0	-16.98
	6505	111	11.96	11.36	14.68	-7.30	7.38	24.0	-16.62
	6665	143	10.06	11.89	14.08	-7.27	6.81	24.0	-17.19
	6825	175	10.32	11.99	14.25	-7.27	6.98	24.0	-17.02
	6985	207	10.89	11.52	14.23	-7.46	6.77	24.0	-17.23

Table 7-7. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 41 of 122



Sample MIMO Calculation:

At 5935MHz in 802.11a (20MHz BW) mode, the average conducted output power was measured to be 10.99 dBm for Antenna-1 and 10.64 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(10.99 \text{ dBm} + 10.64 \text{ dBm}) = (12.56 \text{ mW} + 11.59 \text{ mW}) = 24.15 \text{ mW} = 13.83 \text{ dBm}$$

Sample Directional Gain Calculation:

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

Sample e.i.r.p. Calculation:

At 5935MHz in 802.11a (20MHz BW) mode, the average MIMO conducted power was calculated to be 13.83 dBm with directional gain of -7.09 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$13.83 \text{ dBm} + -7.09 \text{ dBi} = 6.74 \text{ dBm}$$

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 42 of 122

7.4 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density for 802.11a/ax.

In the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band. For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm/MHz e.i.r.p.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation.
2. Span was set to encompass the entire emission bandwidth of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes.
9. Trace was averaged over 100 sweeps.
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Compliance for this device while operating under the control of either an indoor low power access point or a standard power access point is demonstrated by applying the tighter low power indoor access point limit of -1dBm/MHz e.i.r.p. for both cases.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 43 of 122


MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	DCCF [dB]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5935	2	a	0.27	0.48	-10.51	-10.61	3.39	-7.55	0.14	-4.02	-1	-3.02
	6175	45	a	0.38	0.19	-10.16	-10.04	3.29	-7.09	0.14	-3.66	-1	-2.66
	6415	93	a	-0.50	0.60	-10.00	-10.64	3.10	-7.30	0.14	-4.07	-1	-3.07
	5935	2	ax (20MHz)	-0.59	0.05	-10.51	-10.61	2.75	-7.55	0.00	-4.80	-1	-3.80
	6175	45	ax (20MHz)	-1.68	0.08	-10.16	-10.04	2.30	-7.09	0.00	-4.79	-1	-3.79
	6415	93	ax (20MHz)	-2.13	-0.30	-10.00	-10.64	1.89	-7.30	0.00	-5.41	-1	-4.41
	5695	3	ax (40MHz)	-2.62	-3.86	-10.51	-10.61	-0.19	-7.55	0.00	-7.74	-1	-6.74
	6165	43	ax (40MHz)	-2.50	-2.96	-10.37	-10.61	0.29	-7.48	0.00	-7.19	-1	-6.19
	6405	91	ax (40MHz)	-3.15	-2.51	-10.00	-10.64	0.19	-7.30	0.00	-7.11	-1	-6.11
	5985	7	ax (80MHz)	-3.30	-4.21	-10.75	-10.05	-0.72	-7.38	0.00	-8.10	-1	-7.10
	6145	39	ax (80MHz)	-4.19	-4.02	-10.37	-10.61	-1.10	-7.48	0.00	-8.57	-1	-7.57
	6385	87	ax (80MHz)	-3.52	-4.99	-10.00	-10.64	-1.18	-7.30	0.00	-8.49	-1	-7.49
	6025	15	ax (160MHz)	-6.63	-7.98	-10.75	-10.05	-4.24	-7.38	0.00	-11.62	-1	-10.62
	6185	47	ax (160MHz)	-7.23	-7.18	-10.16	-10.16	-4.19	-7.15	0.00	-11.34	-1	-10.34
6345	79	ax (160MHz)	-7.34	-7.55	-10.95	-10.13	-4.43	-7.52	0.00	-11.95	-1	-10.95	
6435	97	a	-2.91	0.87	-10.00	-10.64	2.39	-7.30	0.14	-4.77	-1	-3.77	
Band 6	6475	105	a	-2.82	0.54	-10.00	-10.64	2.19	-7.30	0.14	-4.98	-1	-3.98
	6515	113	a	-3.06	0.66	-10.77	-10.30	2.20	-7.52	0.14	-5.18	-1	-4.18
	6345	97	ax (20MHz)	-2.07	0.54	-10.00	-10.64	2.44	-7.30	0.00	-4.87	-1	-3.87
	6475	105	ax (20MHz)	-2.02	0.37	-10.00	-10.64	2.35	-7.30	0.00	-4.95	-1	-3.95
	6515	113	ax (20MHz)	-2.26	0.68	-10.77	-10.30	2.46	-7.52	0.00	-5.06	-1	-4.06
	6445	99	ax (40MHz)	-3.21	-3.21	-10.00	-10.64	-0.20	-7.30	0.00	-7.50	-1	-6.50
	6485	107	ax (40MHz)	-3.30	-3.30	-10.77	-10.30	-0.29	-7.52	0.00	-7.81	-1	-6.81
	6525	115	ax (40MHz)	-3.31	-3.31	-10.77	-10.30	-0.29	-7.52	0.00	-7.82	-1	-6.82
	6465	103	ax (80MHz)	-3.82	-3.82	-10.00	-10.64	-0.81	-7.30	0.00	-8.11	-1	-7.11
	6505	111	ax (160MHz)	-6.50	-6.50	-10.77	-10.30	-3.49	-7.52	0.00	-11.01	-1	-10.01
Band 7	6535	117	a	-3.02	-3.02	-10.77	-10.30	-0.01	-7.52	0.14	-7.39	-1	-6.39
	6695	149	a	-0.59	-2.28	-10.29	-10.28	1.66	-7.27	0.14	-5.48	-1	-4.48
	6875	185	a	-0.38	-2.49	-10.28	-10.42	1.70	-7.34	0.14	-5.50	-1	-4.50
	6535	117	ax (20MHz)	-0.64	-2.35	-10.77	-10.30	1.60	-7.52	0.00	-5.92	-1	-4.92
	6695	149	ax (20MHz)	-0.26	-1.92	-10.29	-10.28	2.00	-7.27	0.00	-5.28	-1	-4.28
	6875	185	ax (20MHz)	-0.50	-1.95	-10.28	-10.42	1.85	-7.34	0.00	-5.49	-1	-4.49
	6565	123	ax (40MHz)	-3.10	-3.10	-10.77	-10.30	-0.09	-7.52	0.00	-7.62	-1	-6.62
	6725	155	ax (40MHz)	-4.25	-4.25	-10.29	-10.28	-1.24	-7.27	0.00	-8.52	-1	-7.52
	6845	179	ax (40MHz)	-3.54	-3.55	-10.28	-10.42	-0.53	-7.34	0.00	-7.87	-1	-6.87
	6545	119	ax (80MHz)	-3.80	-3.79	-10.77	-10.30	-0.78	-7.52	0.00	-8.30	-1	-7.30
	6705	151	ax (80MHz)	-4.76	-4.76	-10.29	-10.28	-1.75	-7.27	0.00	-9.02	-1	-8.02
	6865	183	ax (80MHz)	-4.94	-4.94	-10.28	-10.42	-1.93	-7.34	0.00	-9.27	-1	-8.27
	6665	143	ax (160MHz)	-8.70	-8.70	-10.65	-10.79	-5.69	-7.71	0.00	-13.40	-1	-12.40
	6825	175	ax (160MHz)	-7.79	-7.79	-10.28	-10.42	-4.78	-7.34	0.00	-12.12	-1	-11.12
Band 8	6895	189	a	-0.45	0.64	-10.39	-10.55	3.14	-7.46	0.14	-4.18	-1	-3.18
	6995	209	a	-1.53	0.08	-10.74	-10.35	2.36	-7.53	0.14	-5.03	-1	-4.03
	7115	233	a	-2.23	1.38	-10.42	-10.84	2.95	-7.62	0.14	-4.53	-1	-3.53
	6895	189	ax (20MHz)	-0.24	0.86	-10.39	-10.55	3.36	-7.46	0.00	-4.10	-1	-3.10
	6995	209	ax (20MHz)	-1.23	0.78	-10.74	-10.35	2.90	-7.53	0.00	-4.63	-1	-3.63
	7115	233	ax (20MHz)	-0.56	1.02	-10.42	-10.84	3.31	-7.62	0.00	-4.31	-1	-3.31
	6885	187	ax (40MHz)	-2.83	-1.73	-10.39	-10.55	0.77	-7.46	0.00	-6.69	-1	-5.69
	7005	211	ax (40MHz)	-4.26	-2.22	-10.74	-10.35	-0.11	-7.53	0.00	-7.64	-1	-6.64
	7085	227	ax (40MHz)	-3.78	-1.84	-10.42	-10.84	0.31	-7.62	0.00	-7.31	-1	-6.31
	6945	199	ax (80MHz)	-4.14	-3.74	-10.39	-10.55	-0.93	-7.46	0.00	-8.39	-1	-7.39
7025	215	ax (80MHz)	-5.28	-3.35	-10.74	-10.35	-1.20	-7.53	0.00	-8.73	-1	-7.73	
6985	207	ax (160MHz)	-8.13	-8.09	-10.74	-10.35	-5.10	-7.53	0.00	-12.63	-1	-11.63	


Table 7-8. MIMO e.i.r.p. Conducted Power Spectral Density Measurements

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 44 of 122

7.4.1 MIMO Antenna-1 Power Spectral Density Measurement - (UNII Band 5)

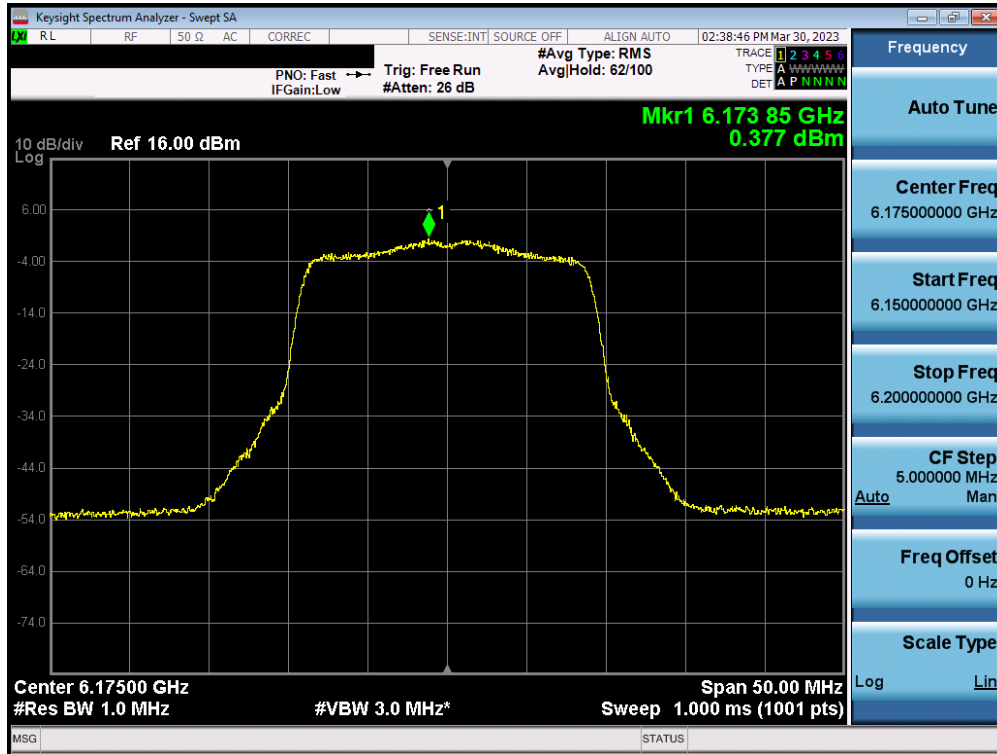


Plot 7-36. Power Spectral Density Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45)

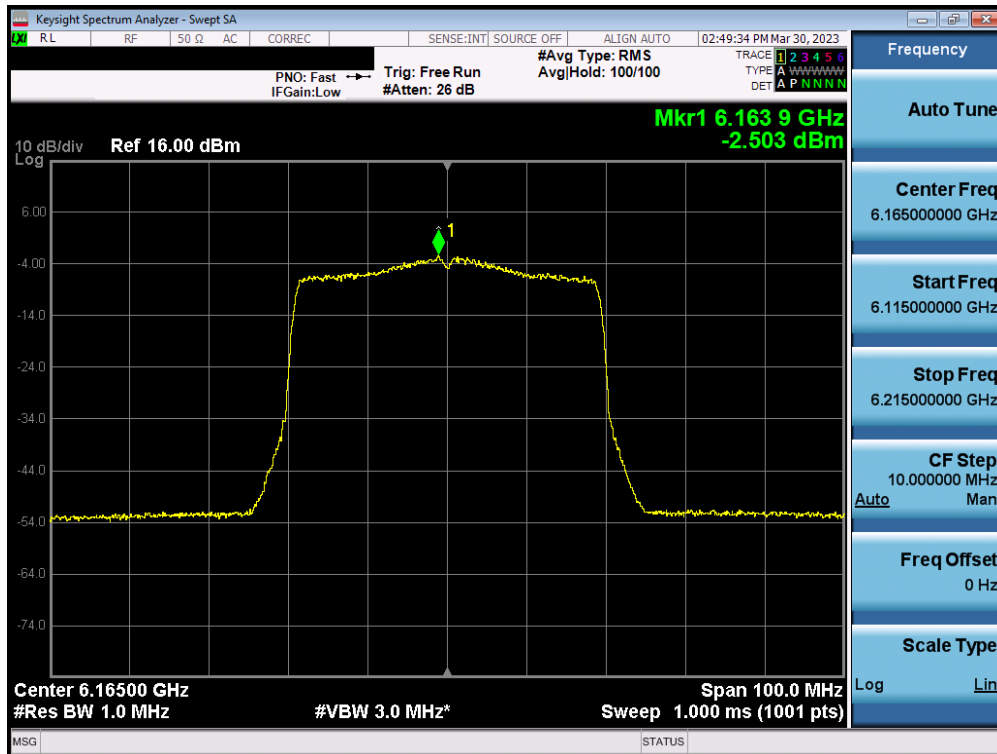


Plot 7-37. Power Spectral Density Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 45 of 122

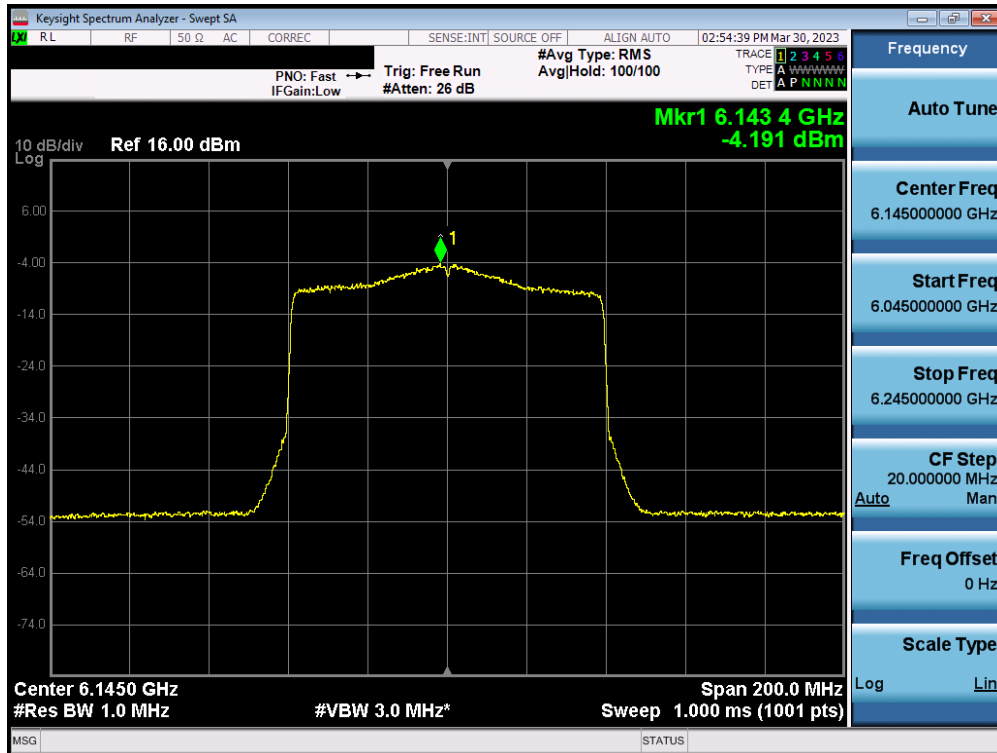


Plot 7-38. Power Spectral Density Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

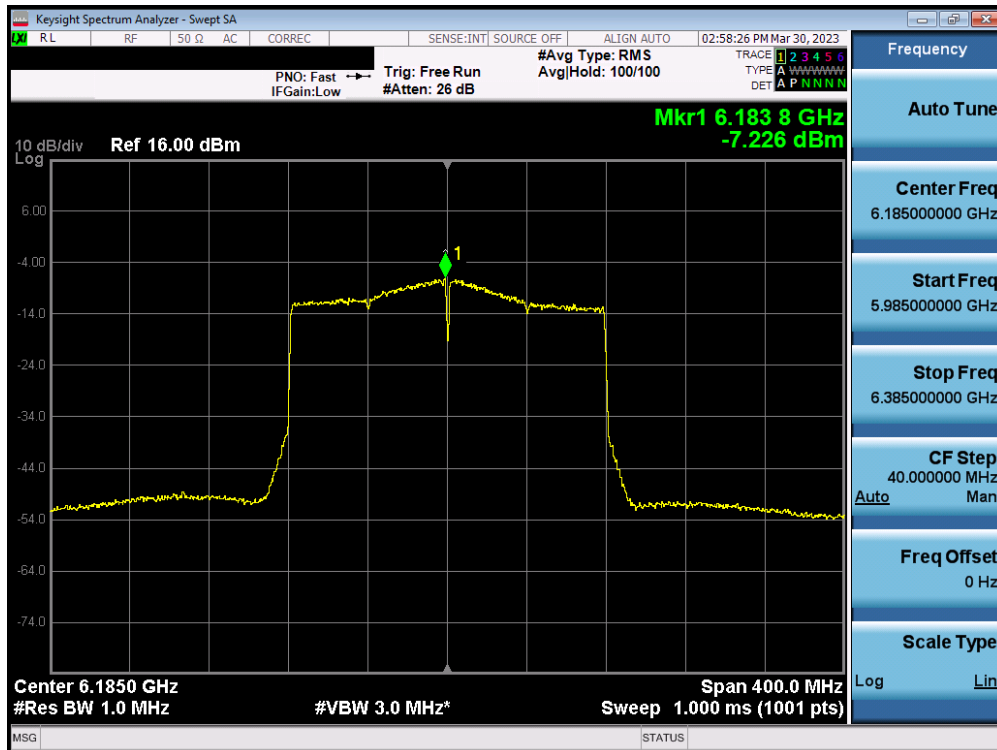


Plot 7-39. Power Spectral Density Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 46 of 122

7.4.2 MIMO Antenna-1 Power Spectral Density Measurement - (UNII Band 6)

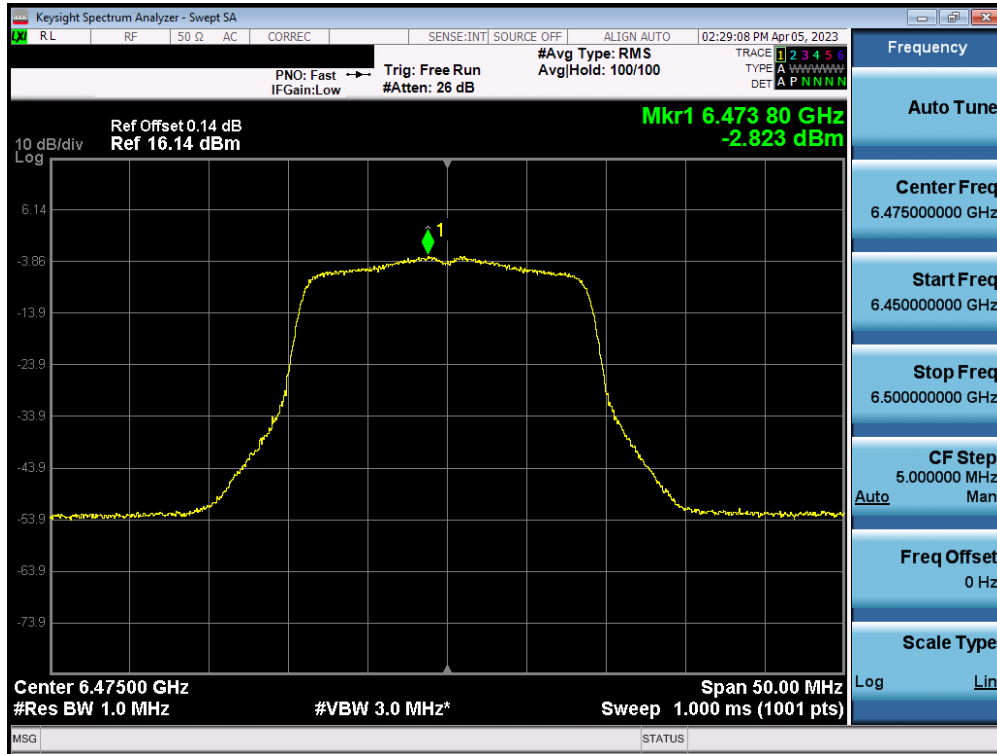


Plot 7-40. Power Spectral Density Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 105)

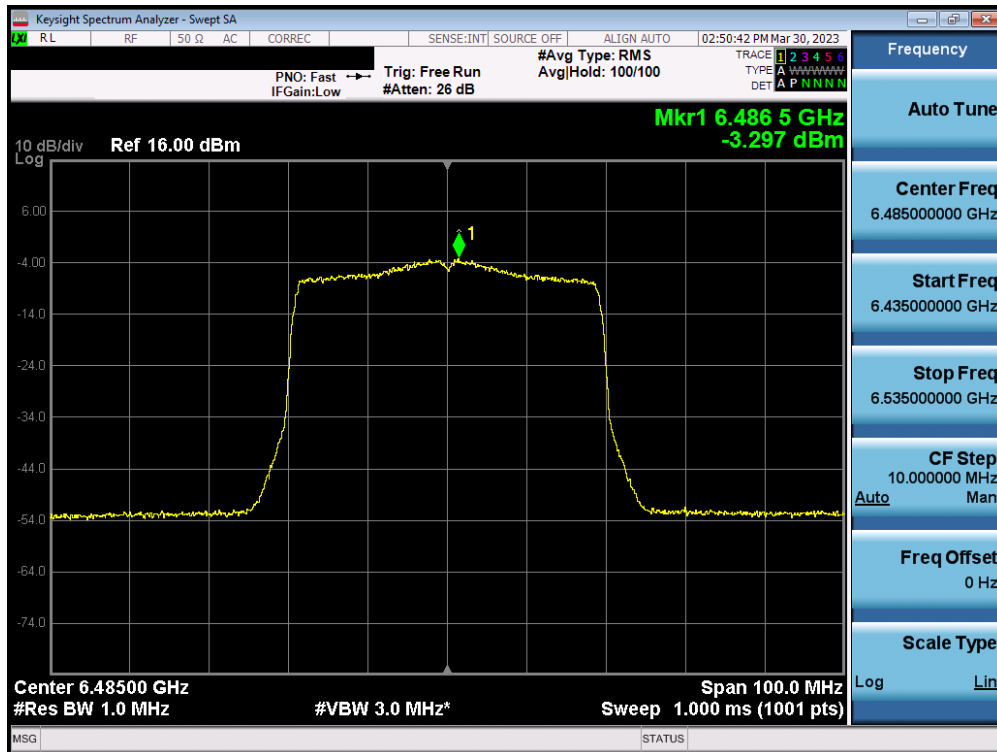


Plot 7-41. Power Spectral Density Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 47 of 122

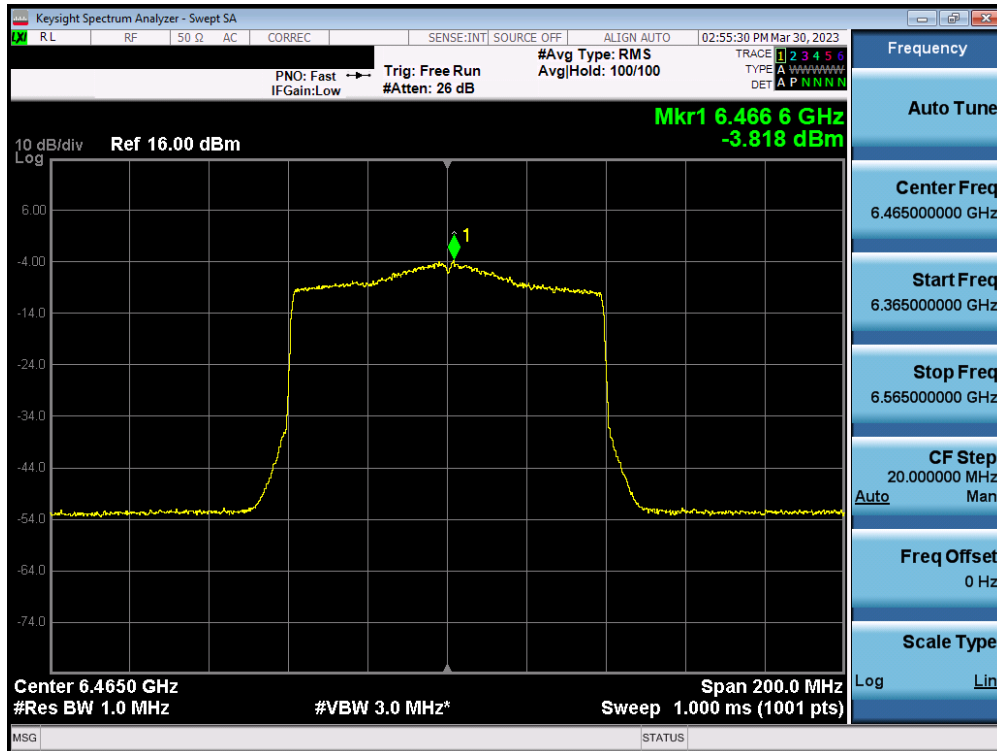


Plot 7-42. Power Spectral Density Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 6) – Ch. 103)

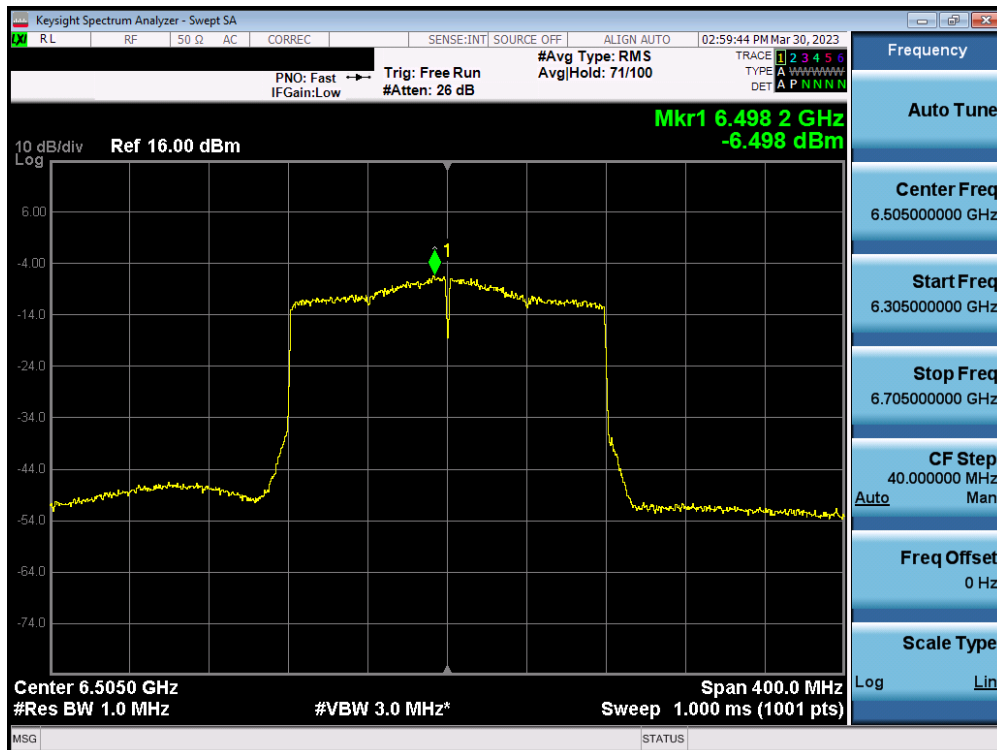


Plot 7-43. Power Spectral Density Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 48 of 122

7.4.3 MIMO Antenna-1 Power Spectral Density Measurement - (UNII Band 7)

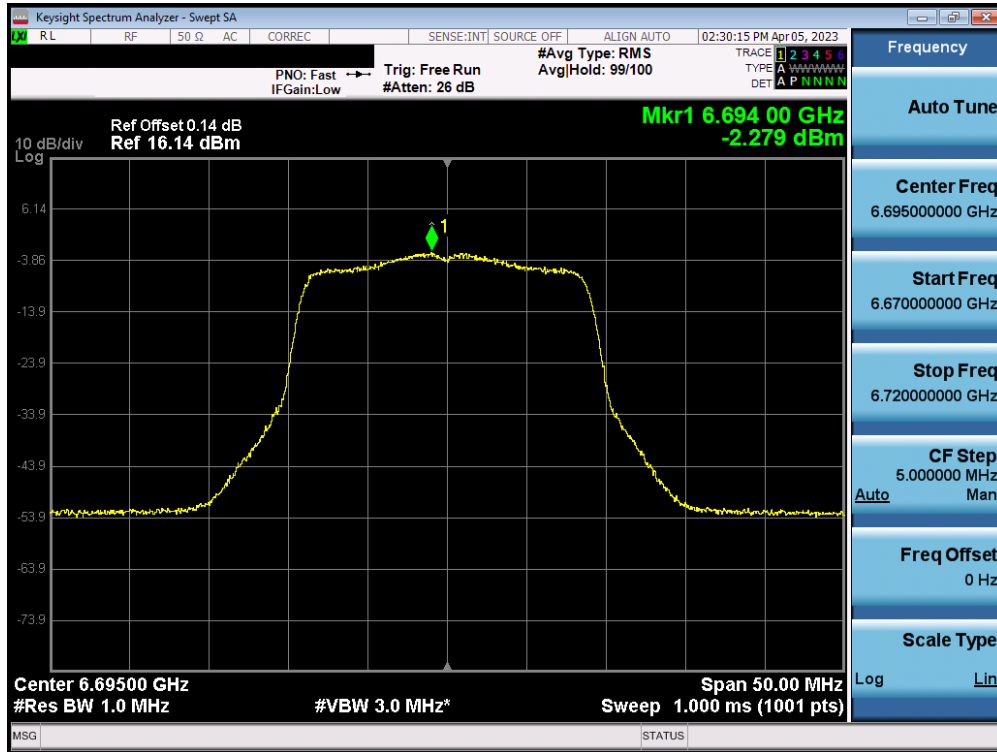


Plot 7-44. Power Spectral Density Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149)

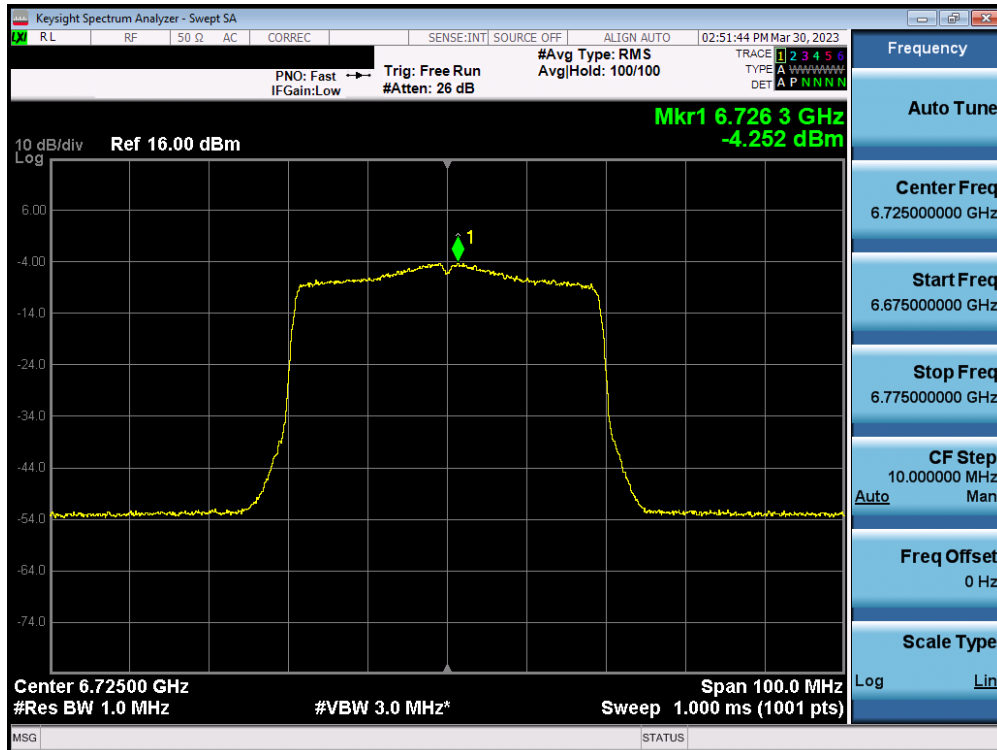


Plot 7-45. Power Spectral Density Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 49 of 122

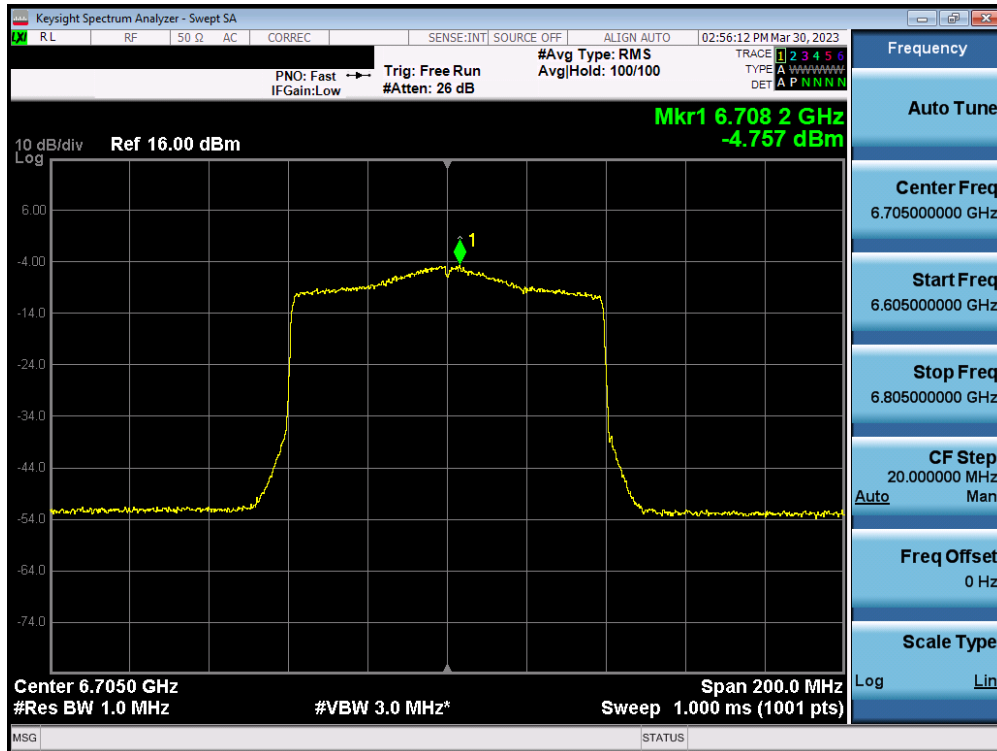


Plot 7-46. Power Spectral Density Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

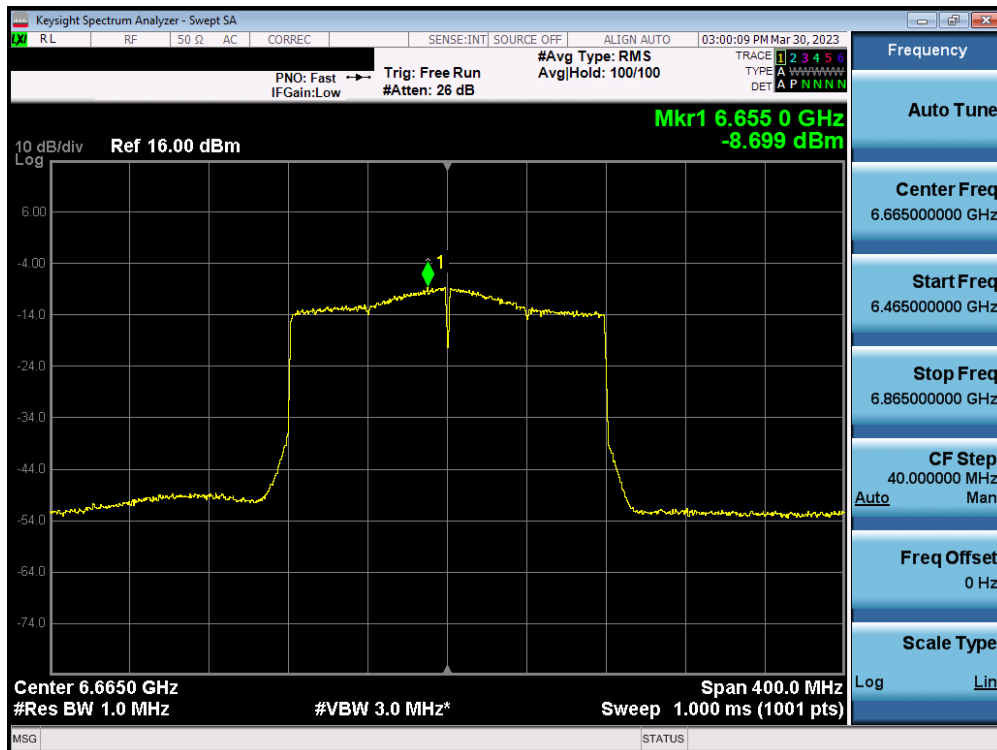


Plot 7-47. Power Spectral Density Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 50 of 122

7.4.4 MIMO Antenna-1 Power Spectral Density Measurement - (UNII Band 8)

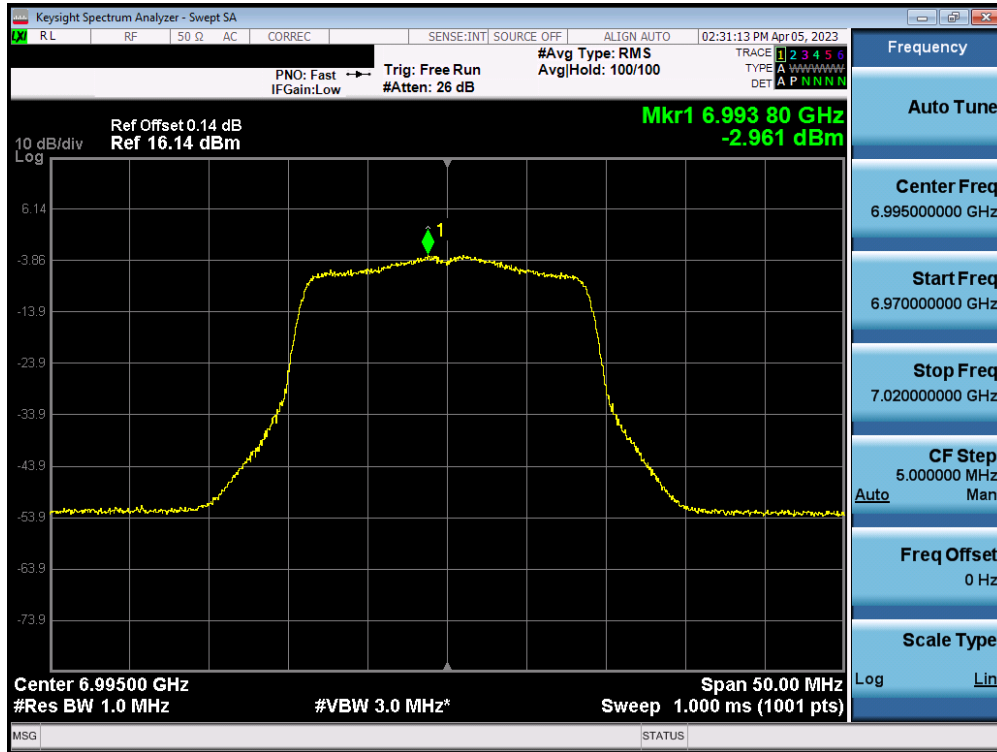


Plot 7-48. Power Spectral Density Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 209)

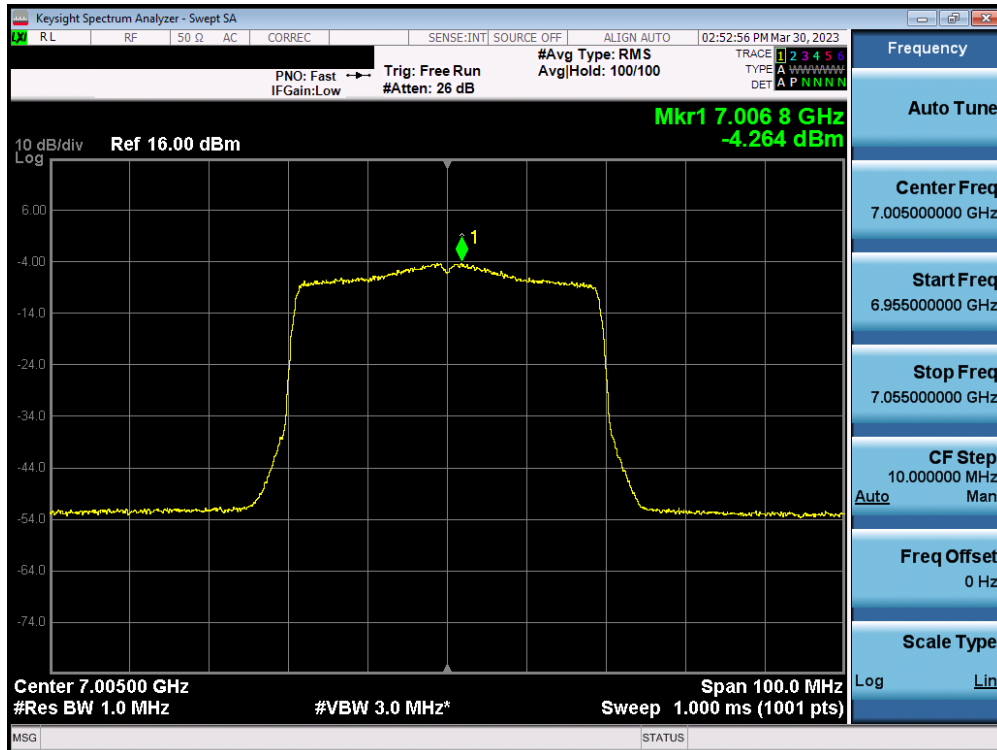


Plot 7-49. Power Spectral Density Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 51 of 122

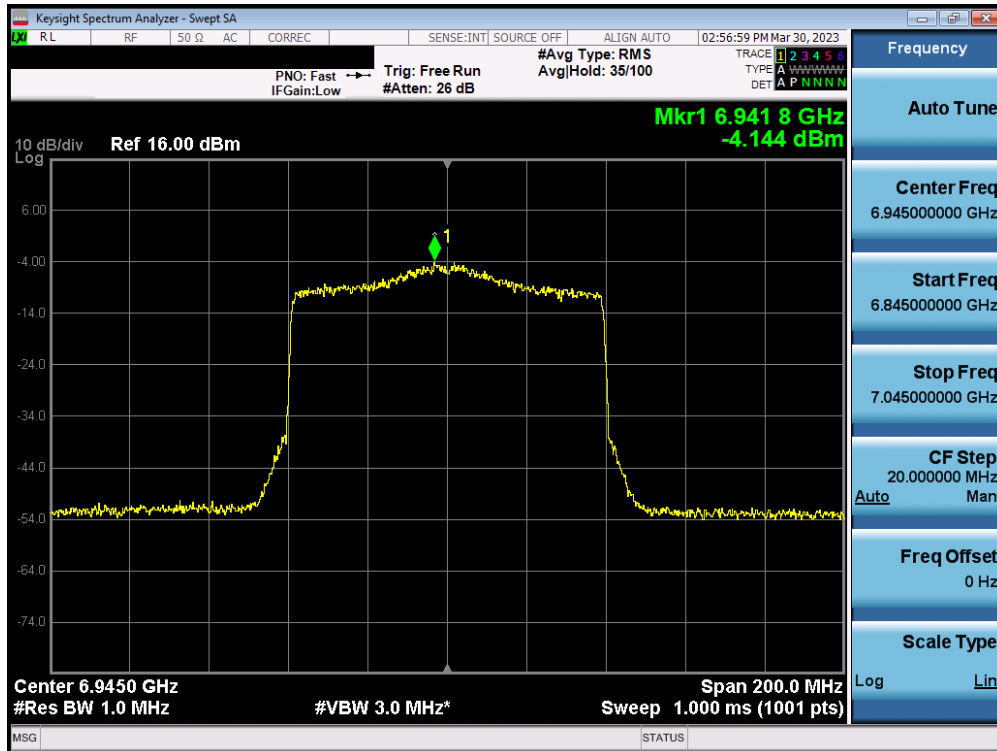


Plot 7-50. Power Spectral Density Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

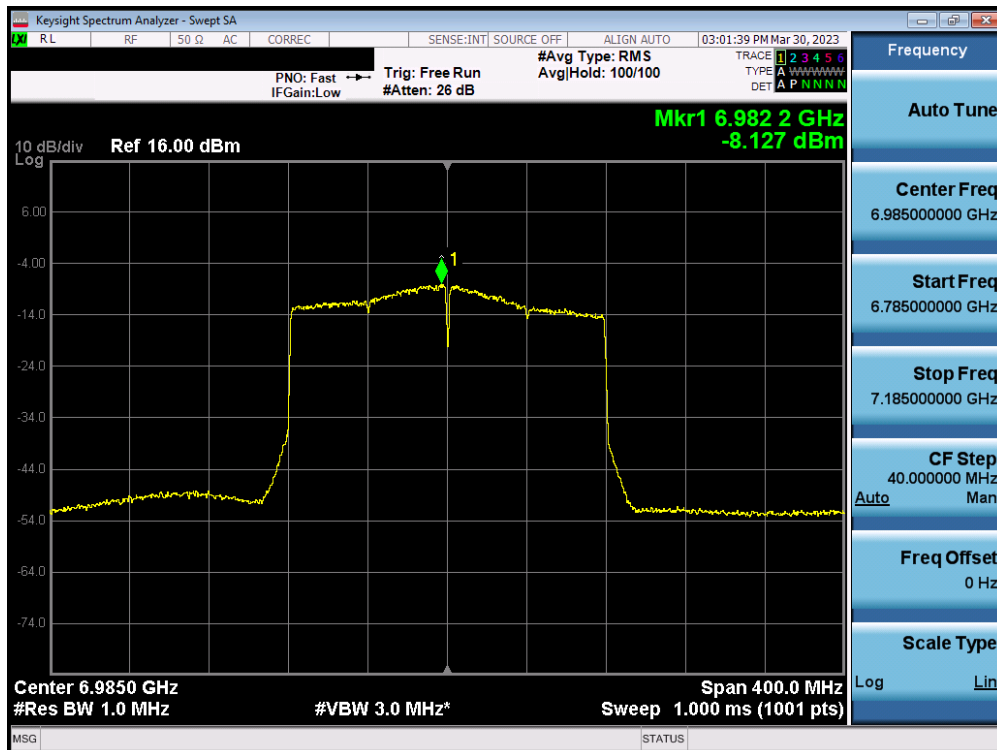


Plot 7-51. Power Spectral Density Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 52 of 122

7.4.5 MIMO Antenna-2 Power Spectral Density Measurement - (UNII Band 5)

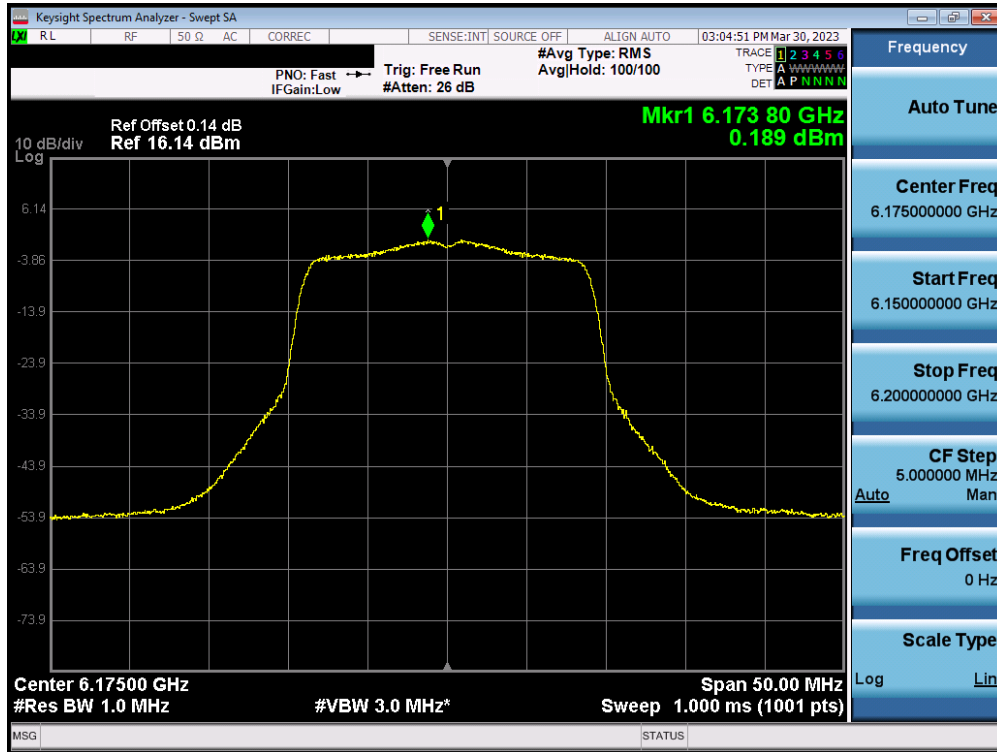


Plot 7-52. Power Spectral Density Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45)

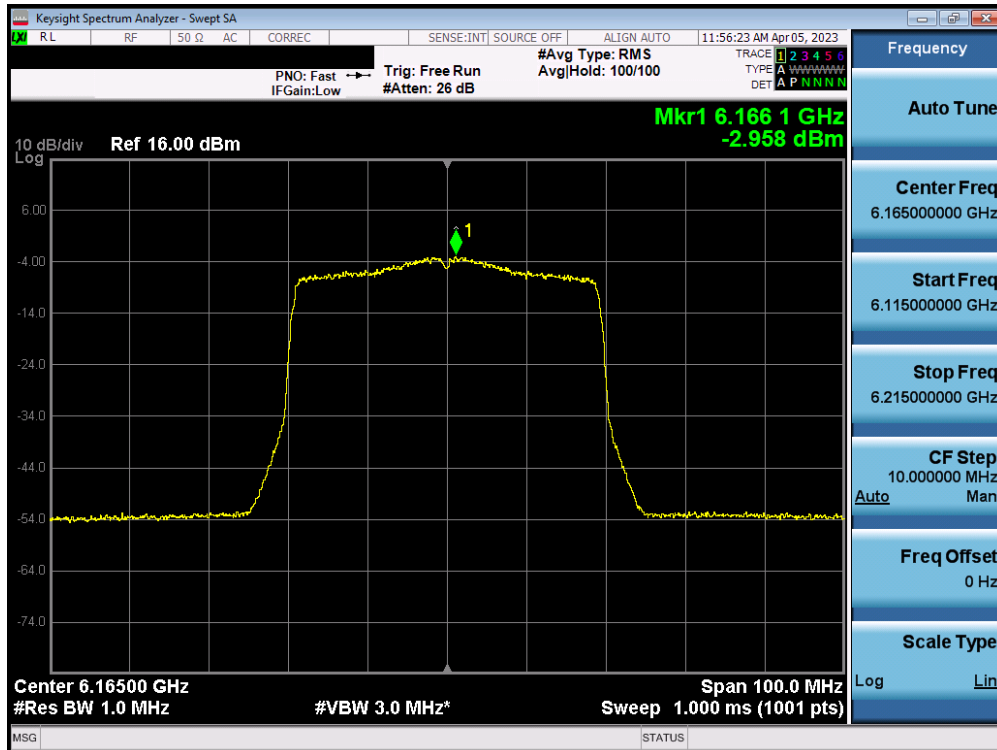


Plot 7-53. Power Spectral Density Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 53 of 122

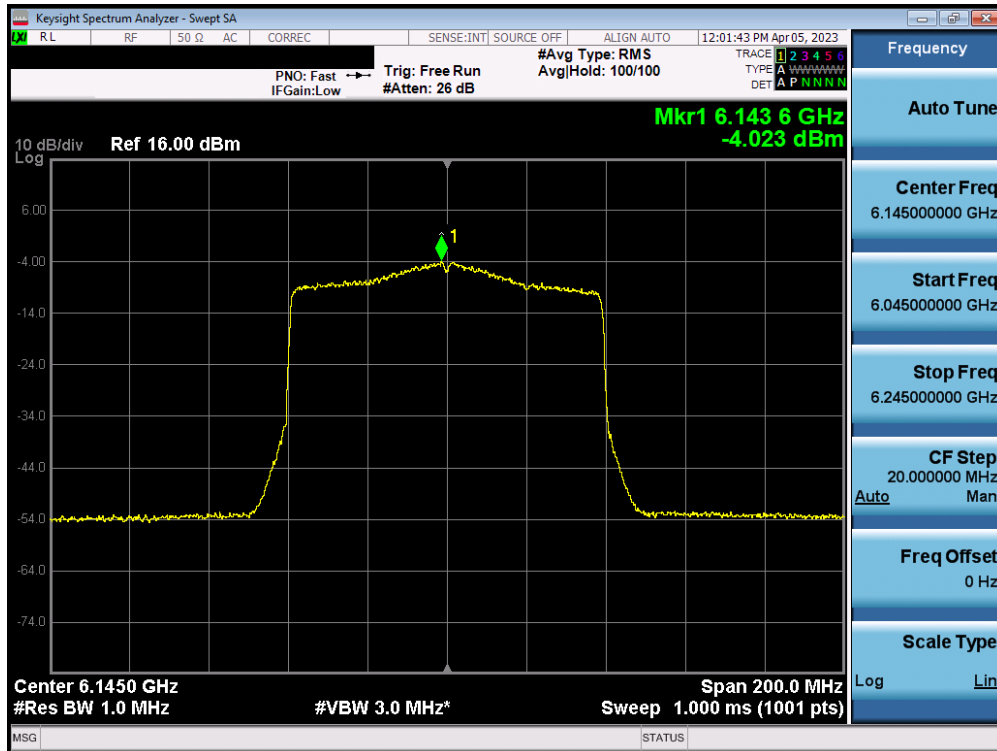


Plot 7-54. Power Spectral Density Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

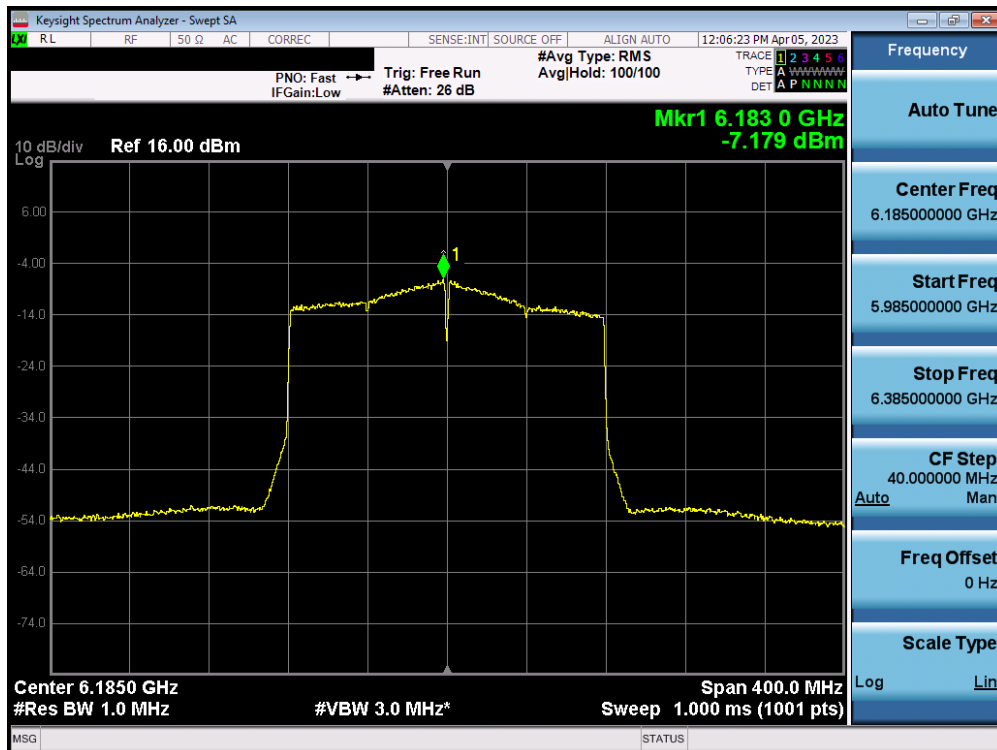


Plot 7-55. Power Spectral Density Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 54 of 122

7.4.6 MIMO Antenna-2 Power Spectral Density Measurement - (UNII Band 6)

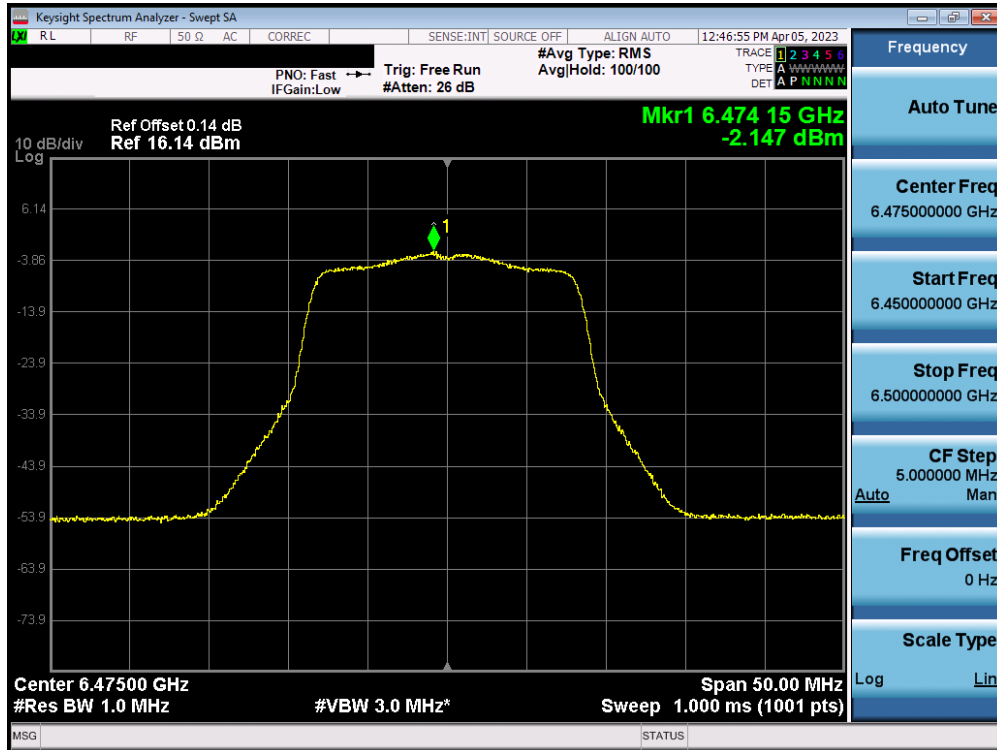


Plot 7-56. Power Spectral Density Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 105)

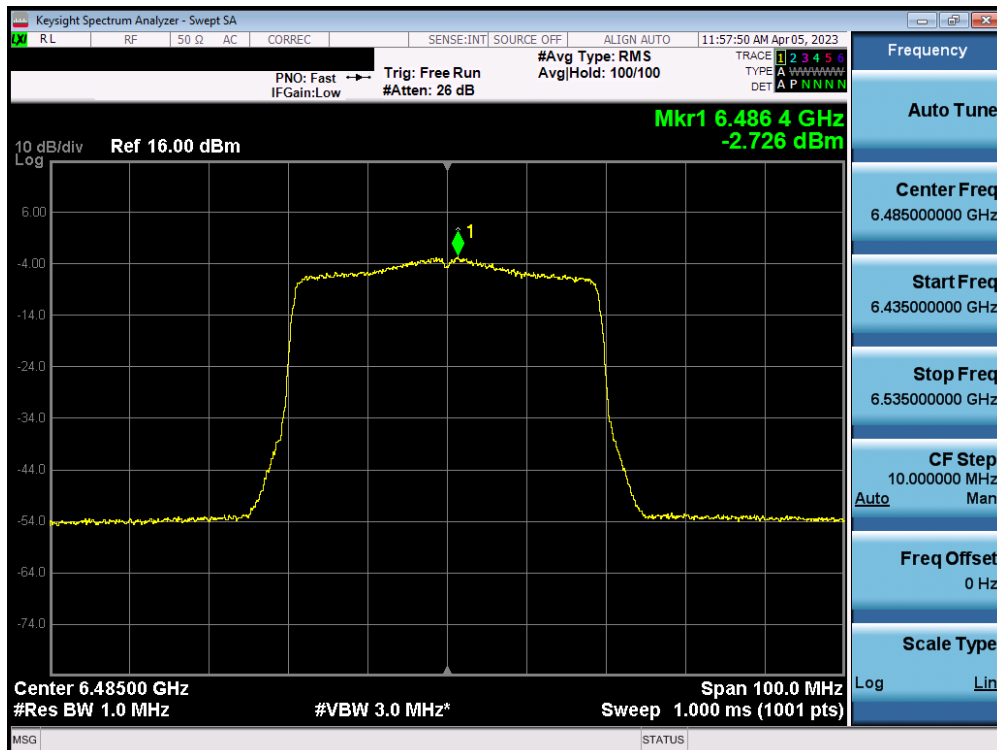


Plot 7-57. Power Spectral Density Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 55 of 122

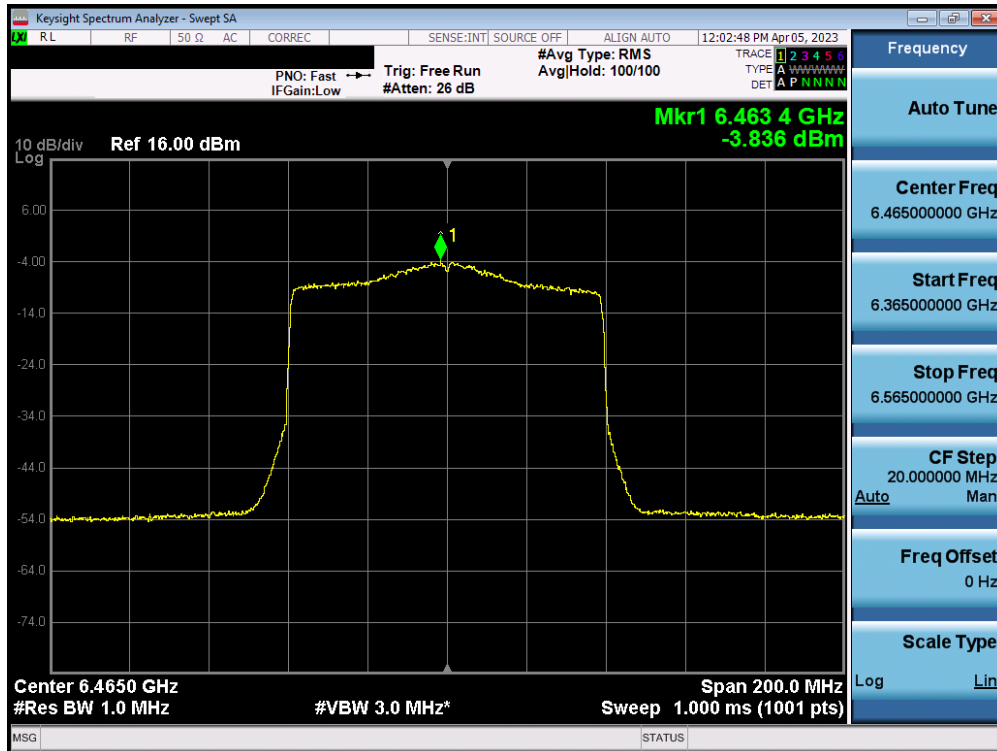


Plot 7-58. Power Spectral Density Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 6) – Ch. 103)

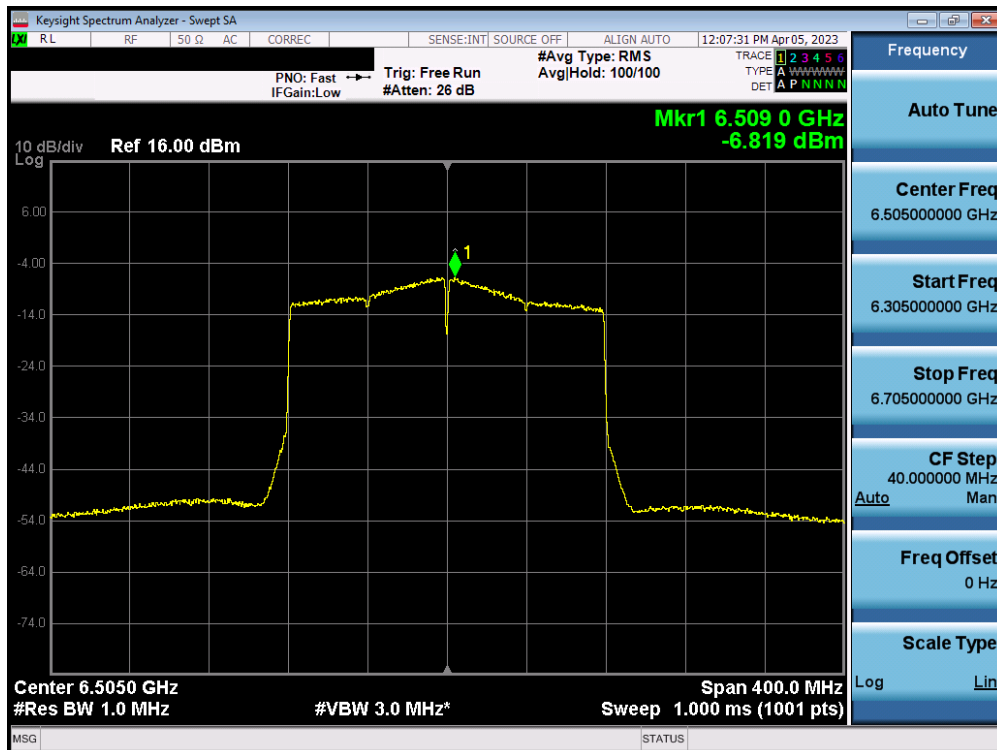


Plot 7-59. Power Spectral Density Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 56 of 122

7.4.7 MIMO Antenna-2 Power Spectral Density Measurement - (UNII Band 7)

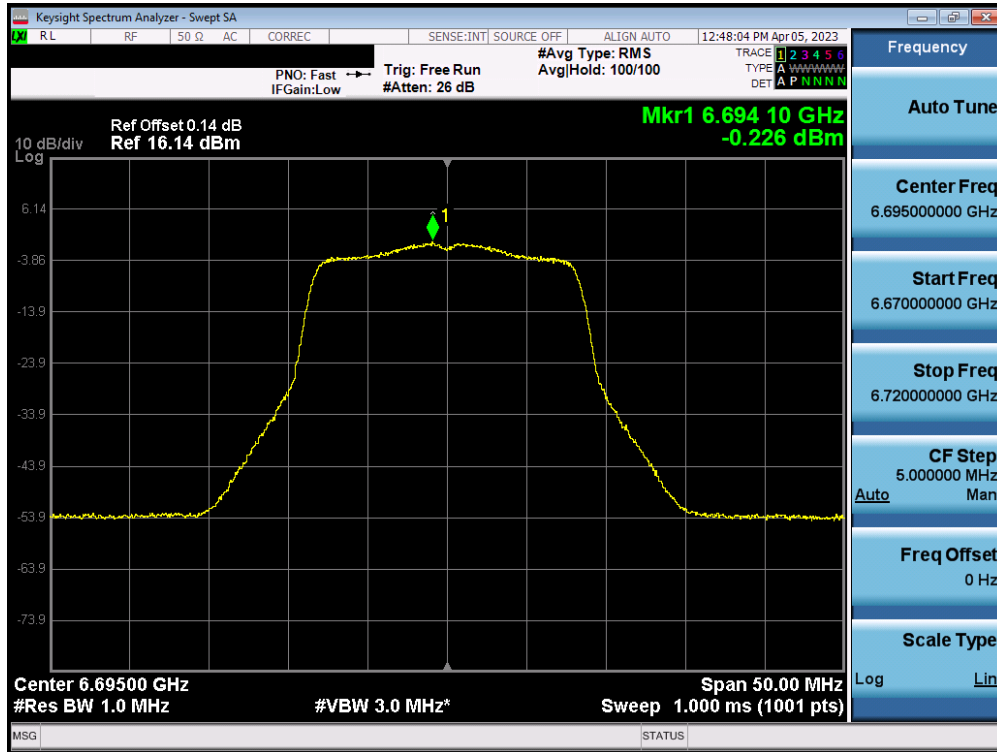


Plot 7-60. Power Spectral Density Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 149)

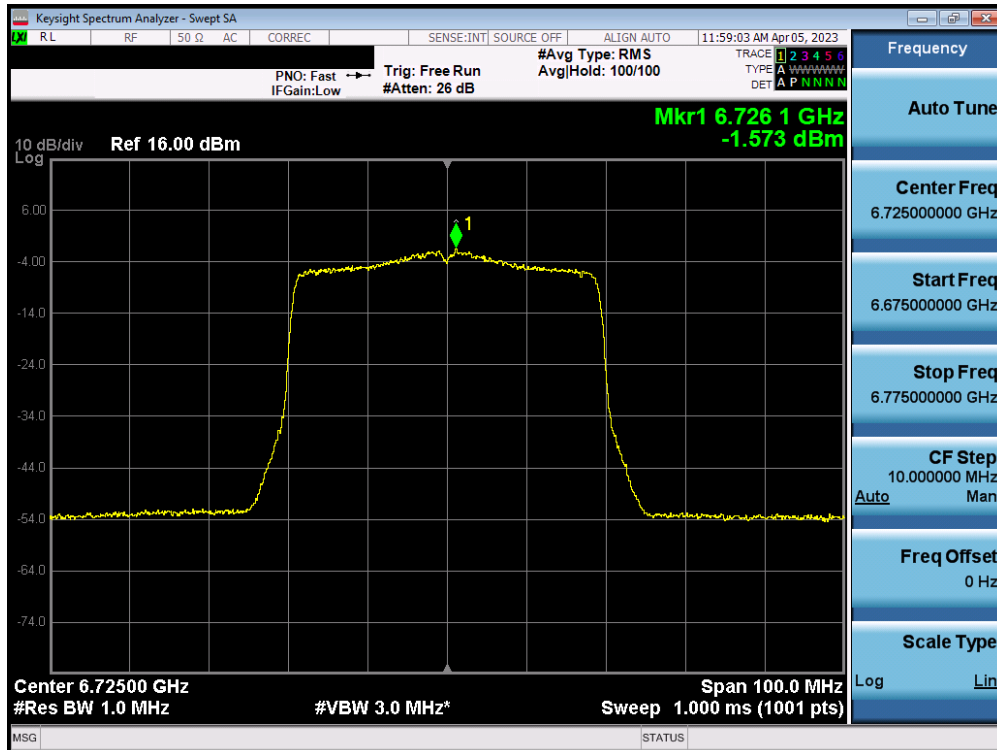


Plot 7-61. Power Spectral Density Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 57 of 122

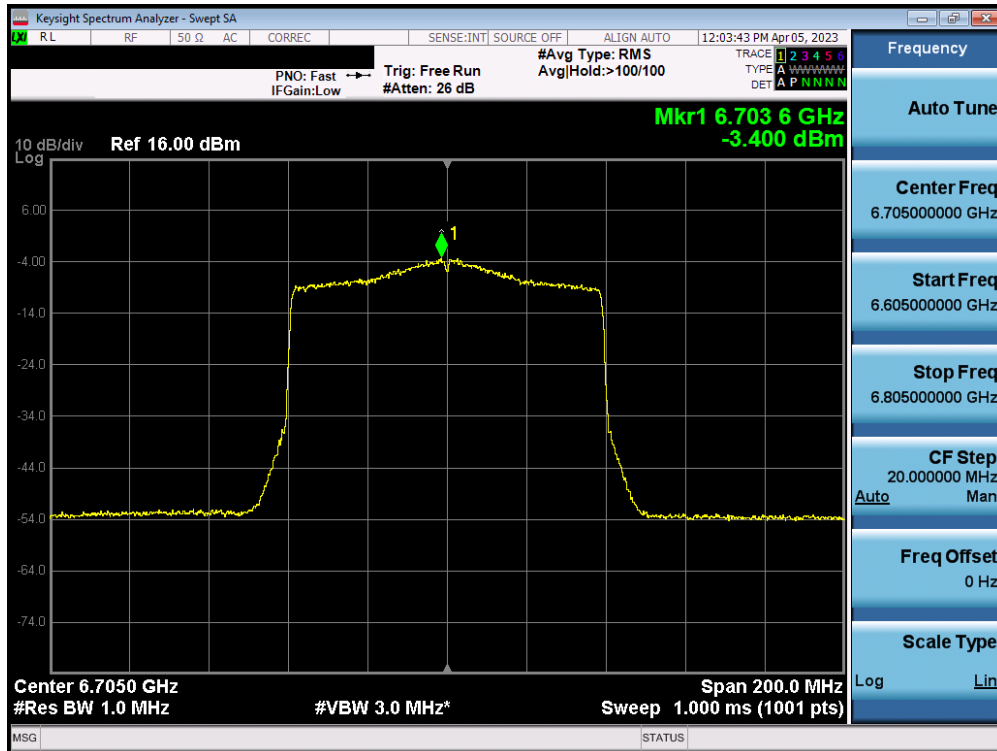


Plot 7-62. Power Spectral Density Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

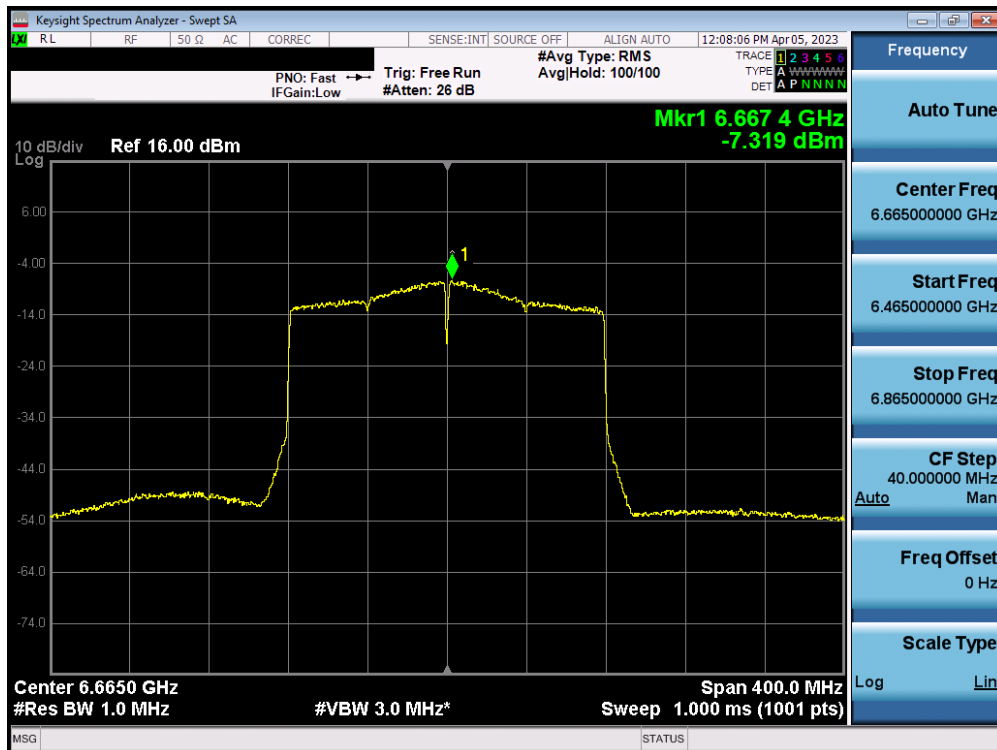


Plot 7-63. Power Spectral Density Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 58 of 122

7.4.8 MIMO Antenna-2 Power Spectral Density Measurement - (UNII Band 8)

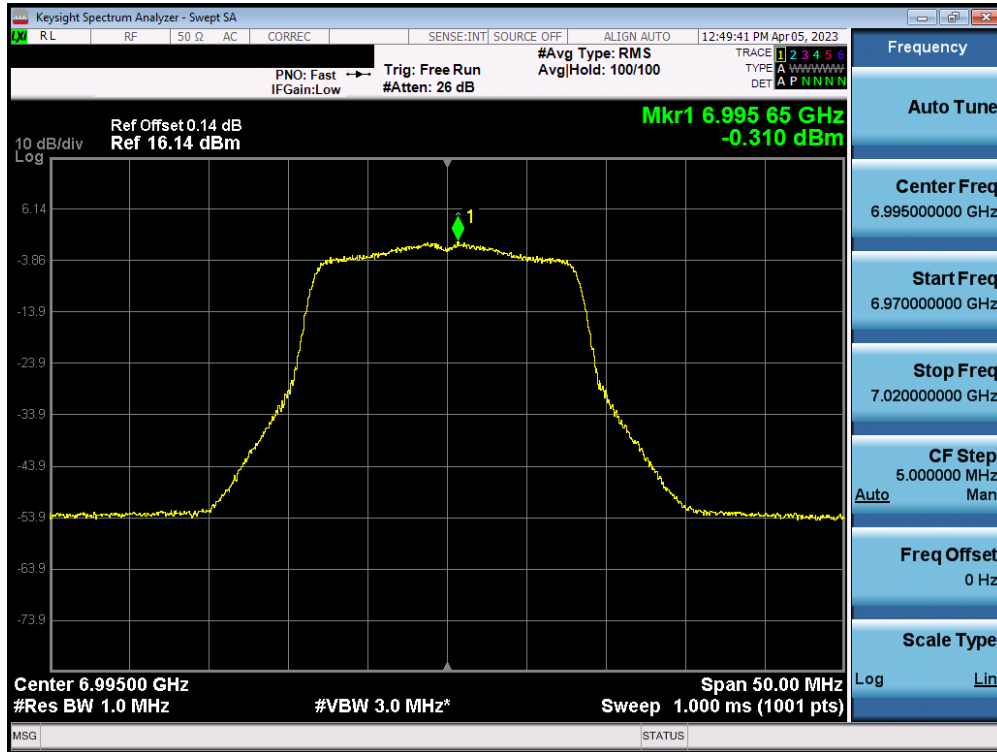


Plot 7-64. Power Spectral Density Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 209)

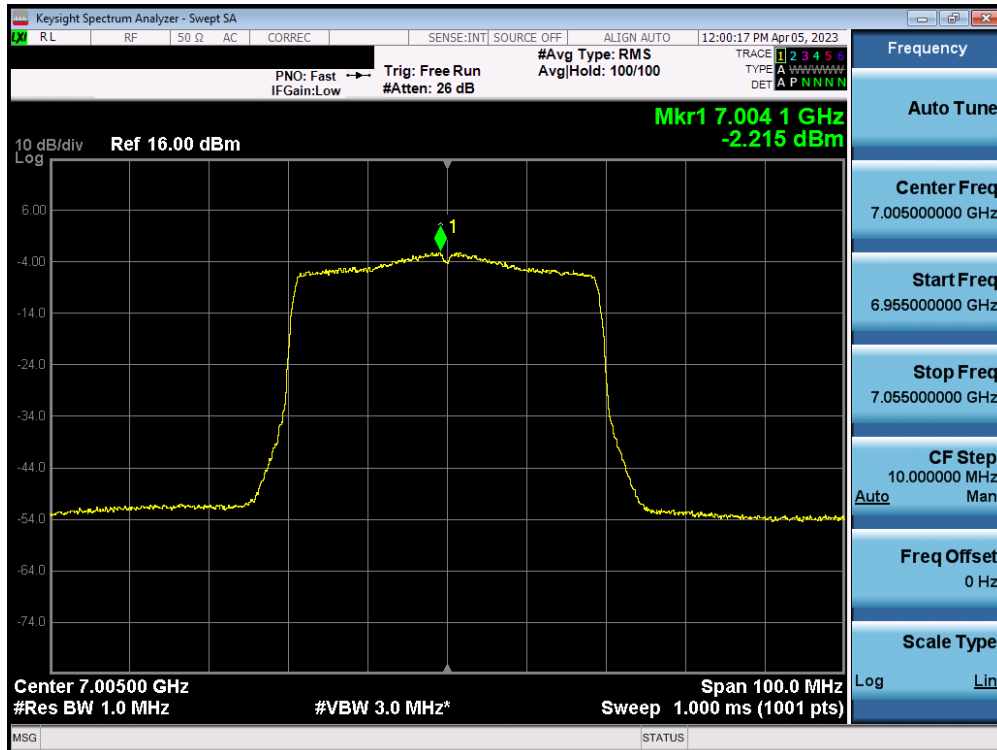


Plot 7-65. Power Spectral Density Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 59 of 122

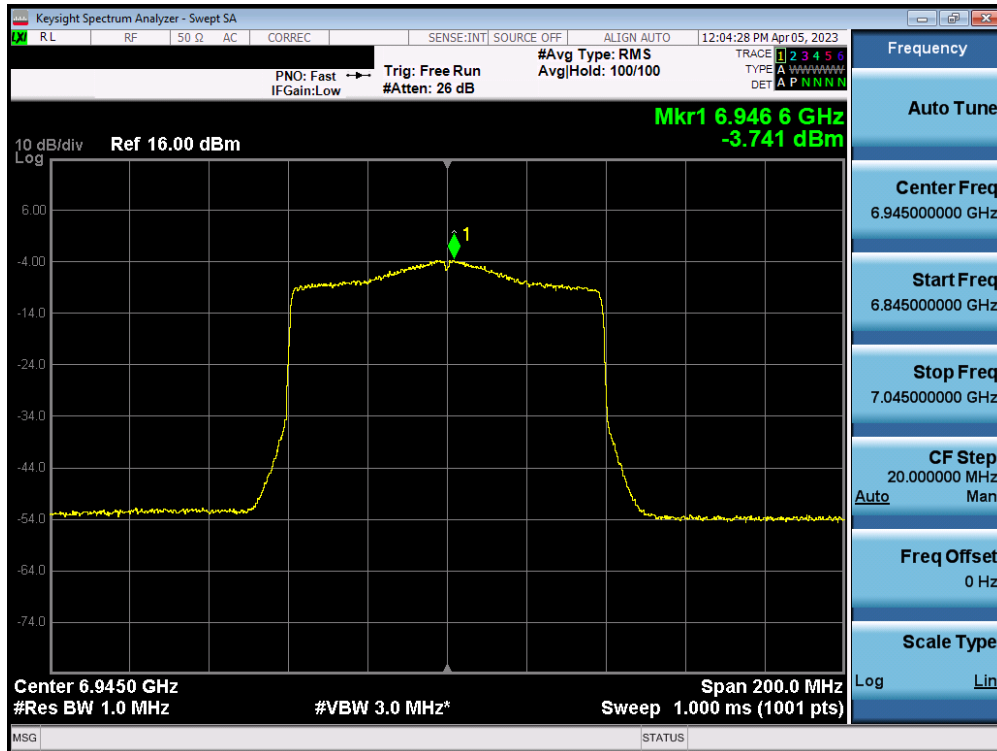

Plot 7-66. Power Spectral Density Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

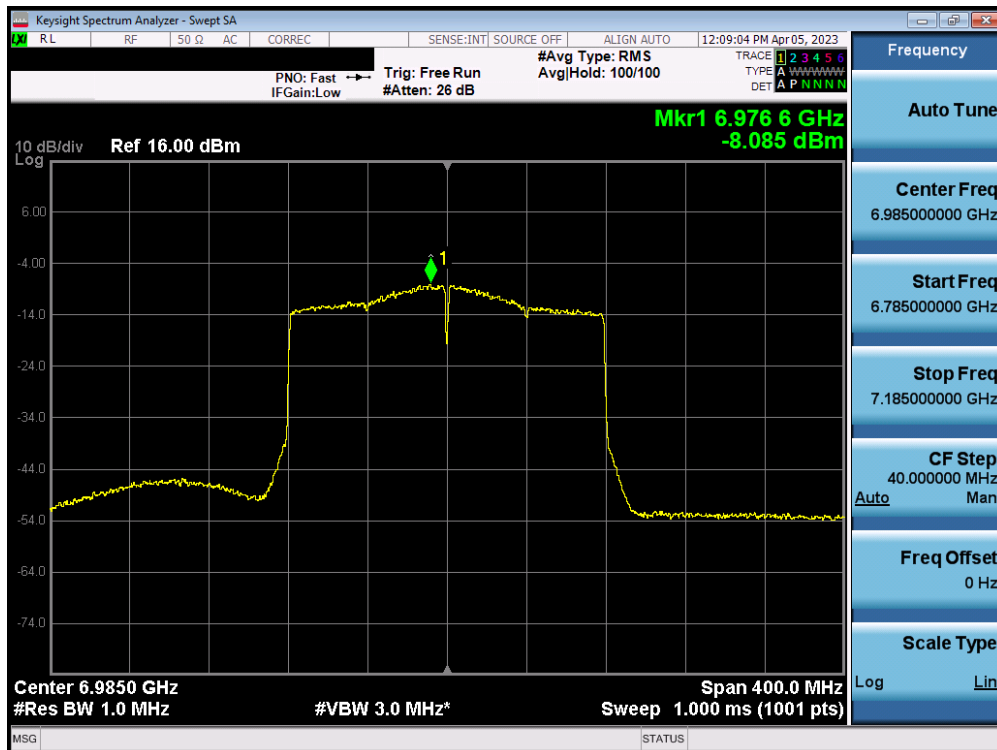

Plot 7-67. Power Spectral Density Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 60 of 122



Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5935MHz in 802.11a (20MHz BW) mode, the average conducted power spectral density was measured to be 0.27 dBm for Antenna-1 and 0.48 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(0.27 \text{ dBm} + 0.48 \text{ dBm}) = (1.06 \text{ mW} + 1.12 \text{ mW}) = 2.18 \text{ mW} = 3.38 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5935 MHz in 802.11a (20MHz BW) mode, the average MIMO power density was calculated to be 3.58 dBm with directional gain of -7.55 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$3.58 \text{ dBm} + -7.55 \text{ dBi} = -4.16 \text{ dBm}$$

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 61 of 122

7.5 In-Band Emissions

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

Test Procedure Used

KDB 987594 D02 v01r01

Test Settings

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10- 2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - i) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - j) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - k) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 62 of 122

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 63 of 122

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Emission Mask	Antenna-2 Emission Mask
Band 5	5935	2	a	Pass	Pass
	6175	45	a	Pass	Pass
	6415	93	a	Pass	Pass
	5935	2	ax (20MHz)	Pass	Pass
	6175	45	ax (20MHz)	Pass	Pass
	6415	93	ax (20MHz)	Pass	Pass
	5695	3	ax (40MHz)	Pass	Pass
	6165	43	ax (40MHz)	Pass	Pass
	6405	91	ax (40MHz)	Pass	Pass
	5985	7	ax (80MHz)	Pass	Pass
	6145	39	ax (80MHz)	Pass	Pass
	6385	87	ax (80MHz)	Pass	Pass
	6025	15	ax (160MHz)	Pass	Pass
	6185	47	ax (160MHz)	Pass	Pass
6345	79	ax (160MHz)	Pass	Pass	
Band 6	6435	97	a	Pass	Pass
	6475	105	a	Pass	Pass
	6515	113	a	Pass	Pass
	6345	97	ax (20MHz)	Pass	Pass
	6475	105	ax (20MHz)	Pass	Pass
	6515	113	ax (20MHz)	Pass	Pass
	6445	99	ax (40MHz)	Pass	Pass
	6485	107	ax (40MHz)	Pass	Pass
	6525	115	ax (40MHz)	Pass	Pass
	6465	103	ax (80MHz)	Pass	Pass
6505	111	ax (160MHz)	Pass	Pass	
Band 7	6535	117	a	Pass	Pass
	6695	149	a	Pass	Pass
	6875	185	a	Pass	Pass
	6535	117	ax (20MHz)	Pass	Pass
	6695	149	ax (20MHz)	Pass	Pass
	6875	185	ax (20MHz)	Pass	Pass
	6565	123	ax (40MHz)	Pass	Pass
	6725	155	ax (40MHz)	Pass	Pass
	6845	179	ax (40MHz)	Pass	Pass
	6545	119	ax (80MHz)	Pass	Pass
	6705	151	ax (80MHz)	Pass	Pass
	6865	183	ax (80MHz)	Pass	Pass
	6665	143	ax (160MHz)	Pass	Pass
	6825	175	ax (160MHz)	Pass	Pass
Band 8	6895	189	a	Pass	Pass
	6995	209	a	Pass	Pass
	7115	233	a	Pass	Pass
	6895	189	ax (20MHz)	Pass	Pass
	6995	209	ax (20MHz)	Pass	Pass
	7115	233	ax (20MHz)	Pass	Pass
	6885	187	ax (40MHz)	Pass	Pass
	7005	211	ax (40MHz)	Pass	Pass
	7085	227	ax (40MHz)	Pass	Pass
	6945	199	ax (80MHz)	Pass	Pass
	7025	215	ax (80MHz)	Pass	Pass
6985	207	ax (160MHz)	Pass	Pass	


Table 7-9. In-Band Emission Test Results

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 64 of 122

7.5.1 MIMO Antenna-1 In-Band Emission Plot Measurement - (UNII Band 5)

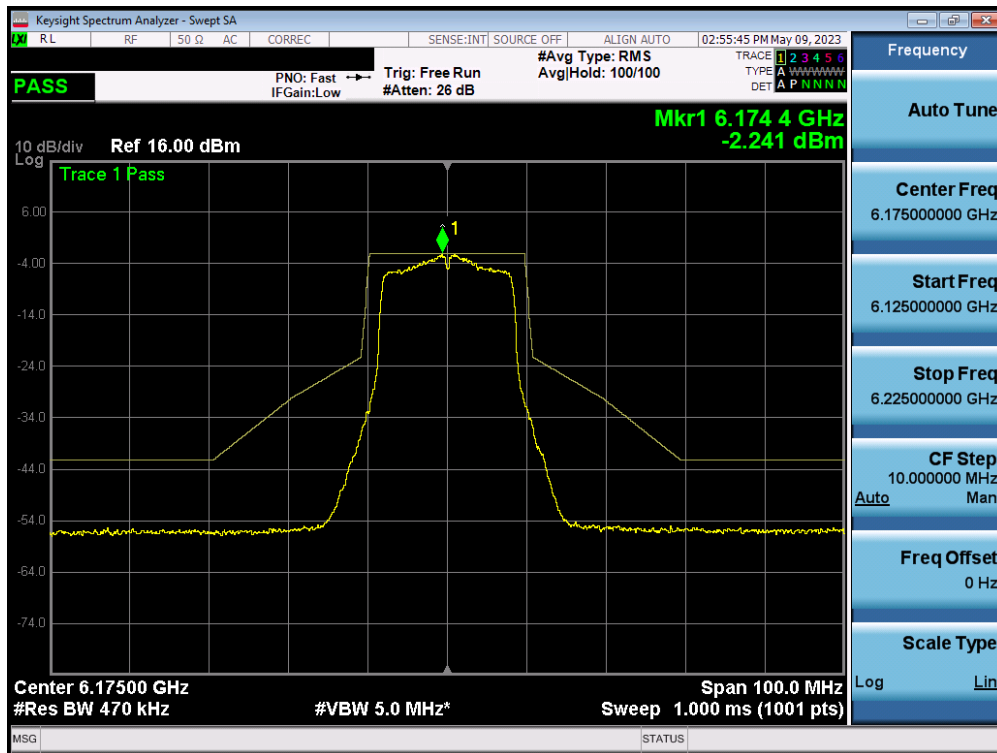


Plot 7-68. In-Band Emission Plot Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45)

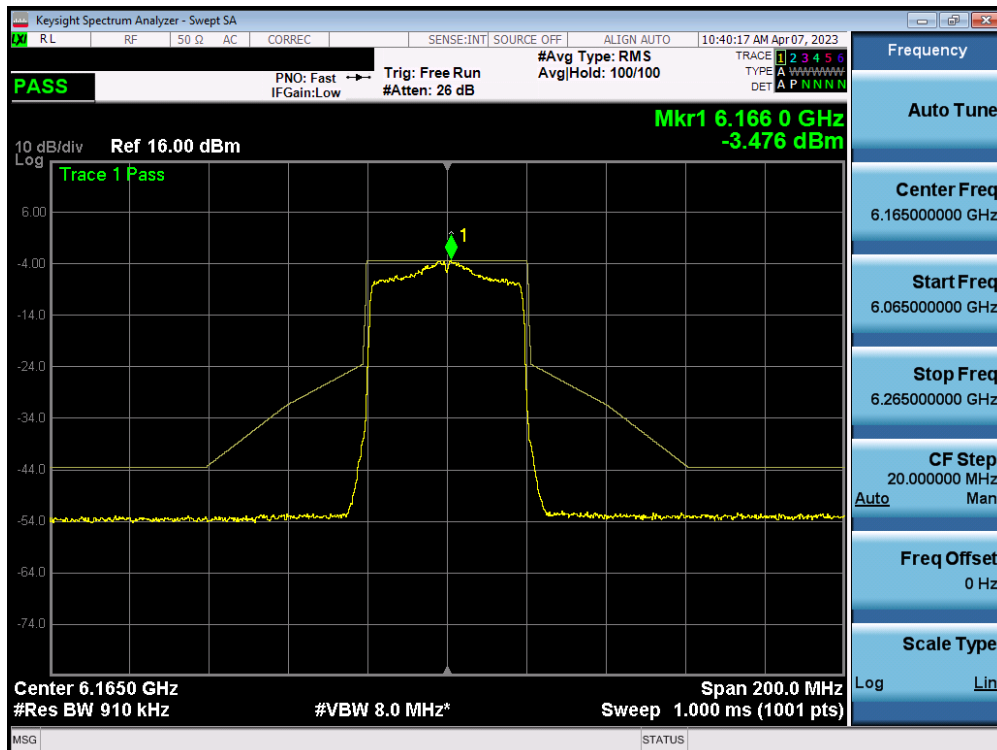


Plot 7-69. In-Band Emission Plot Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 65 of 122

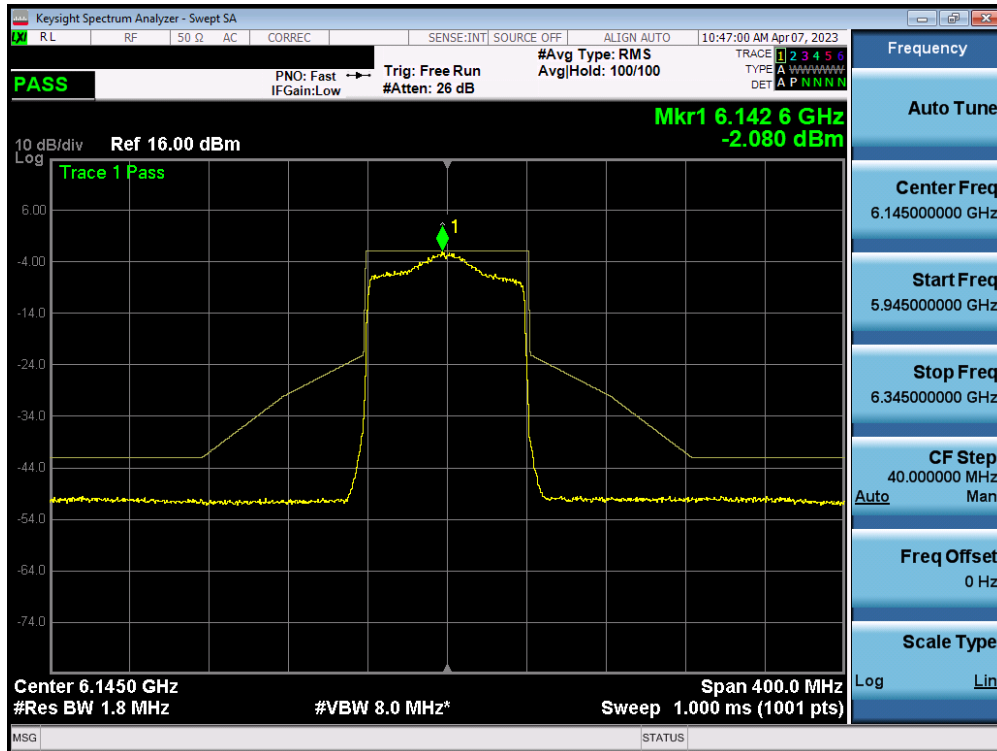


Plot 7-70. In-Band Emission Plot Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

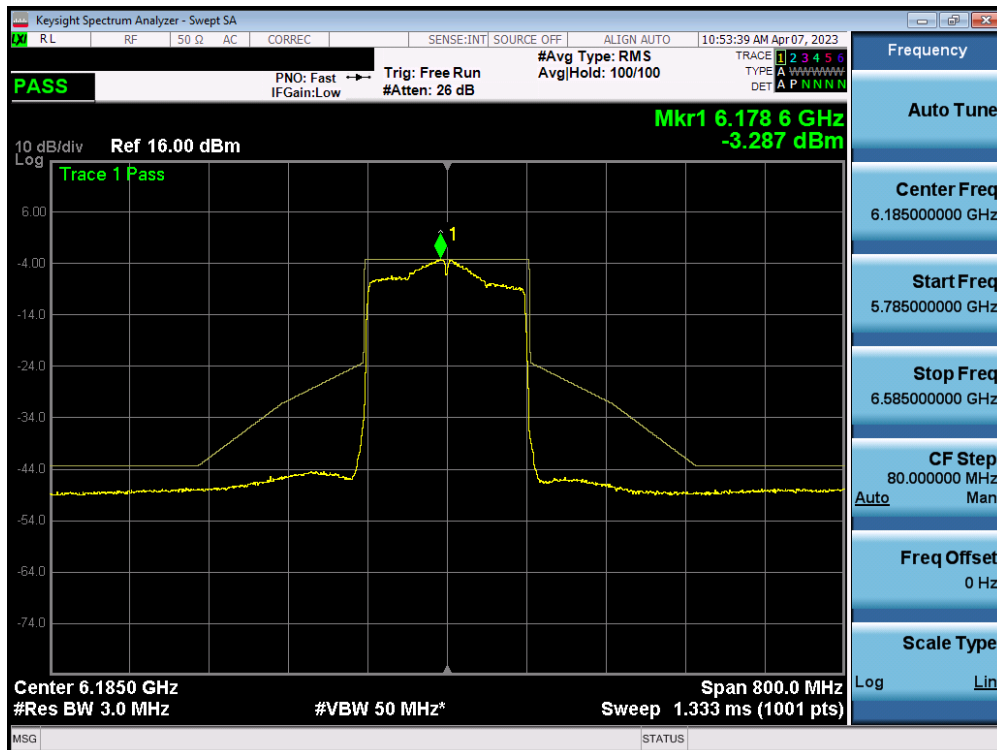


Plot 7-71. In-Band Emission Plot Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 66 of 122

7.5.2 MIMO Antenna-1 In-Band Emission Plot Measurement - (UNII Band 6)

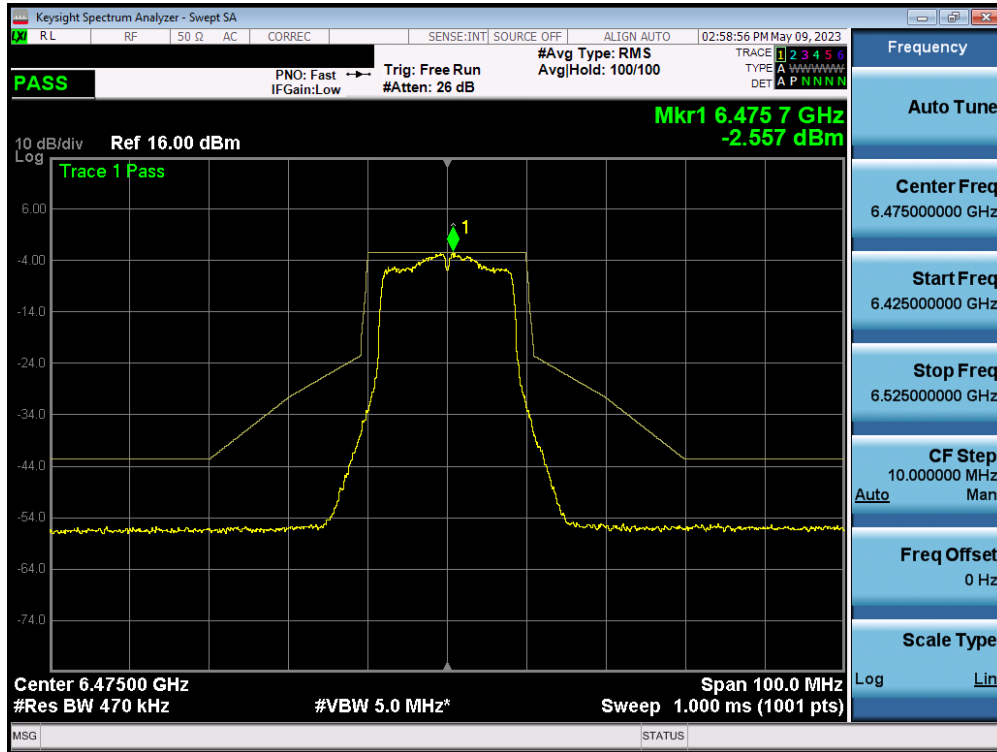


Plot 7-72. In-Band Emission Plot Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 105)

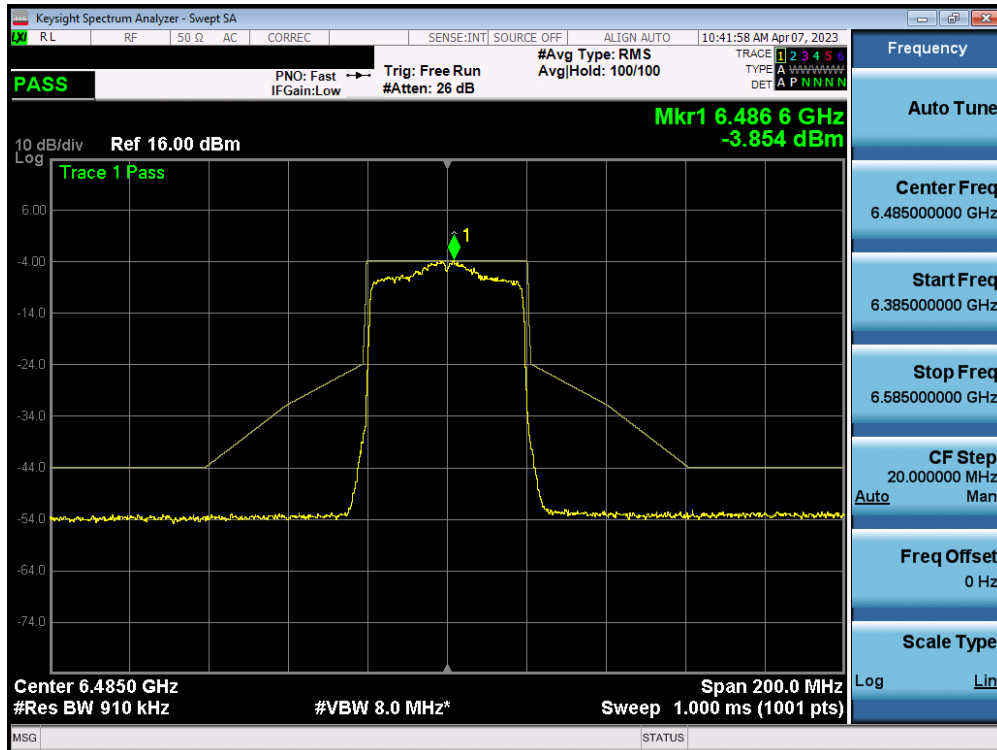


Plot 7-73. In-Band Emission Plot Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 67 of 122

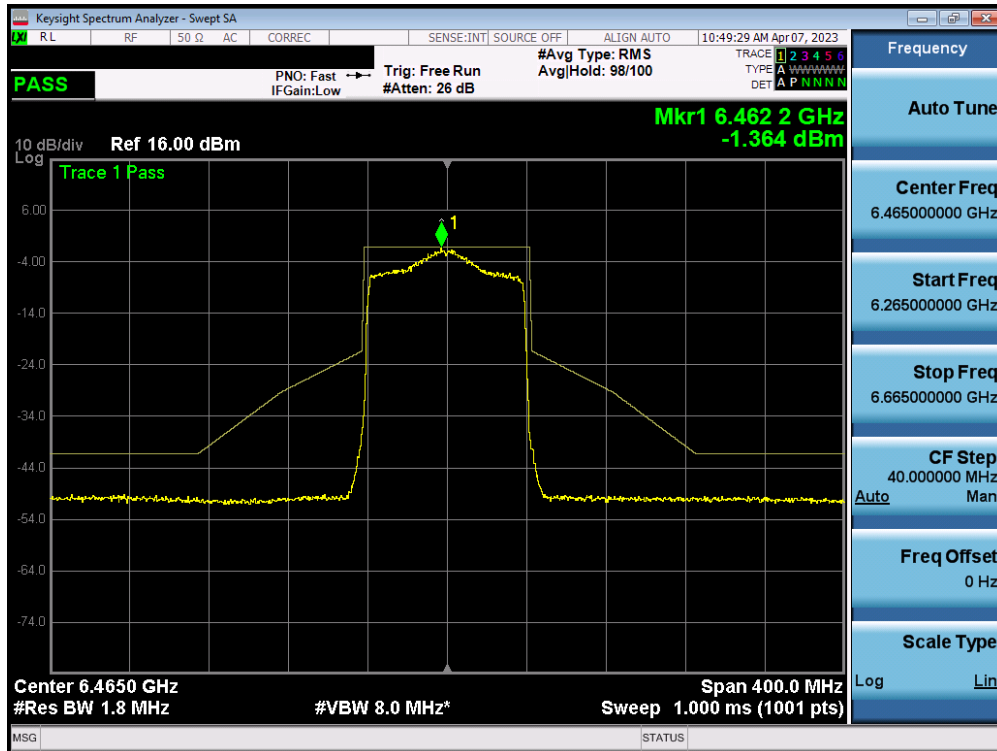


Plot 7-74. In-Band Emission Plot Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 6) – Ch. 103)

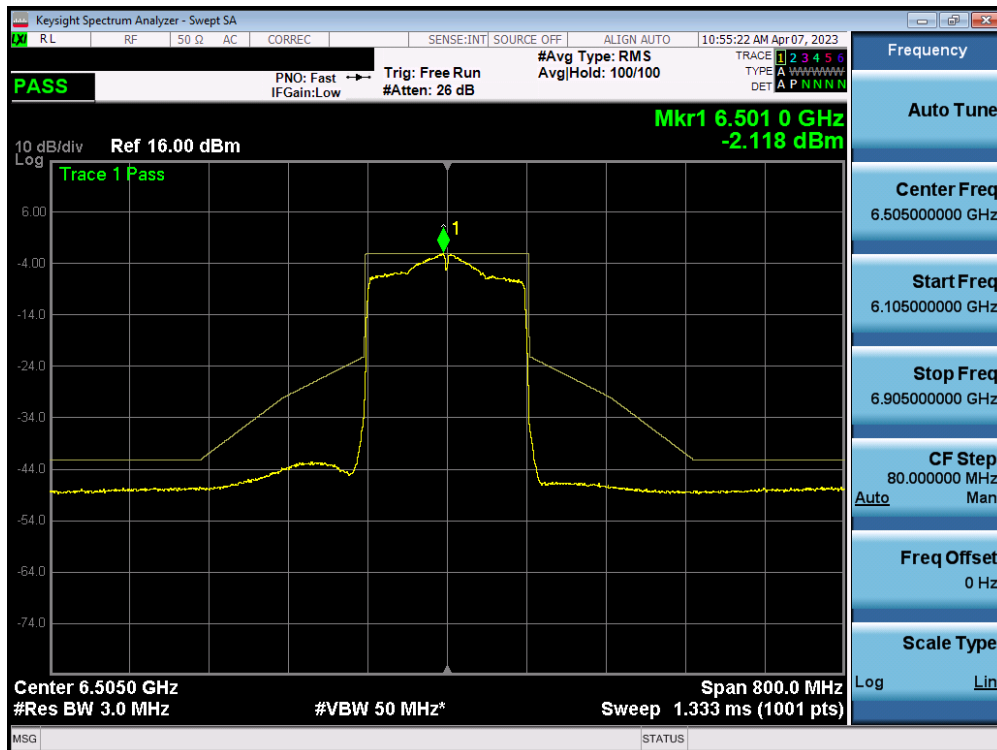


Plot 7-75. In-Band Emission Plot Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 68 of 122

7.5.3 MIMO Antenna-1 In-Band Emission Plot Measurement - (UNII Band 7)

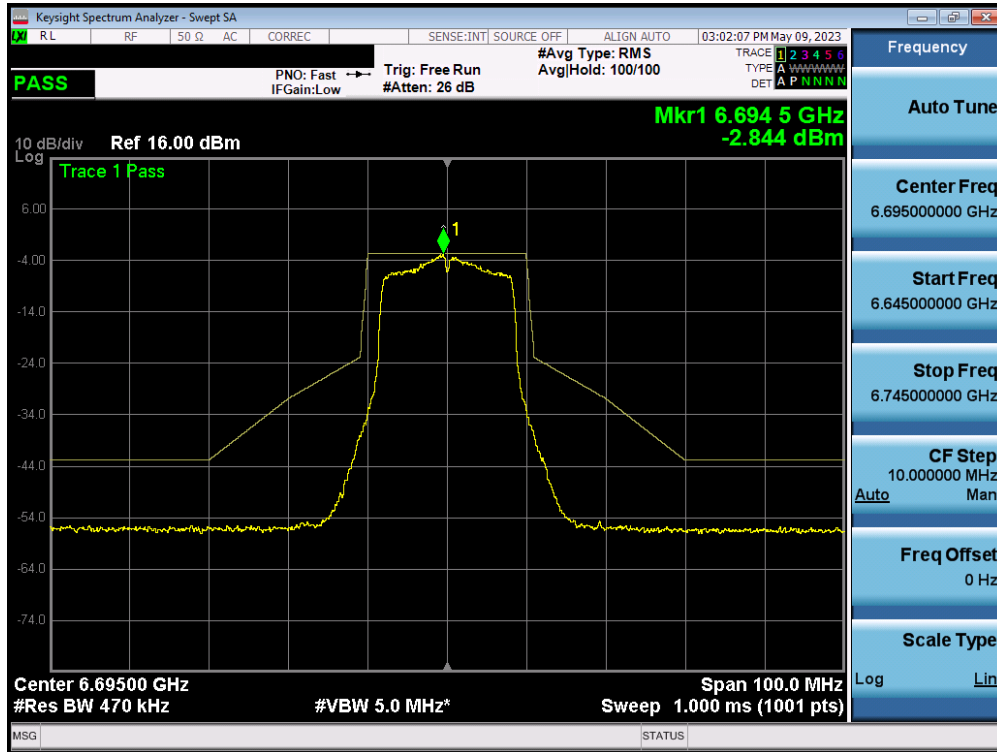


Plot 7-76. In-Band Emission Plot Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149)

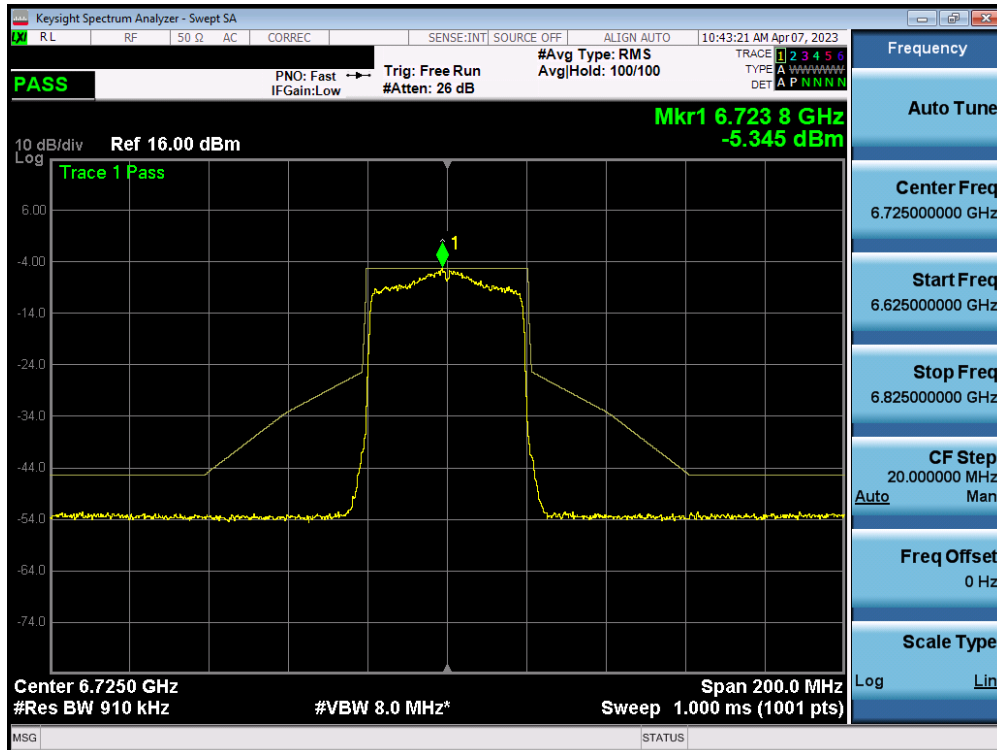


Plot 7-77. In-Band Emission Plot Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 69 of 122

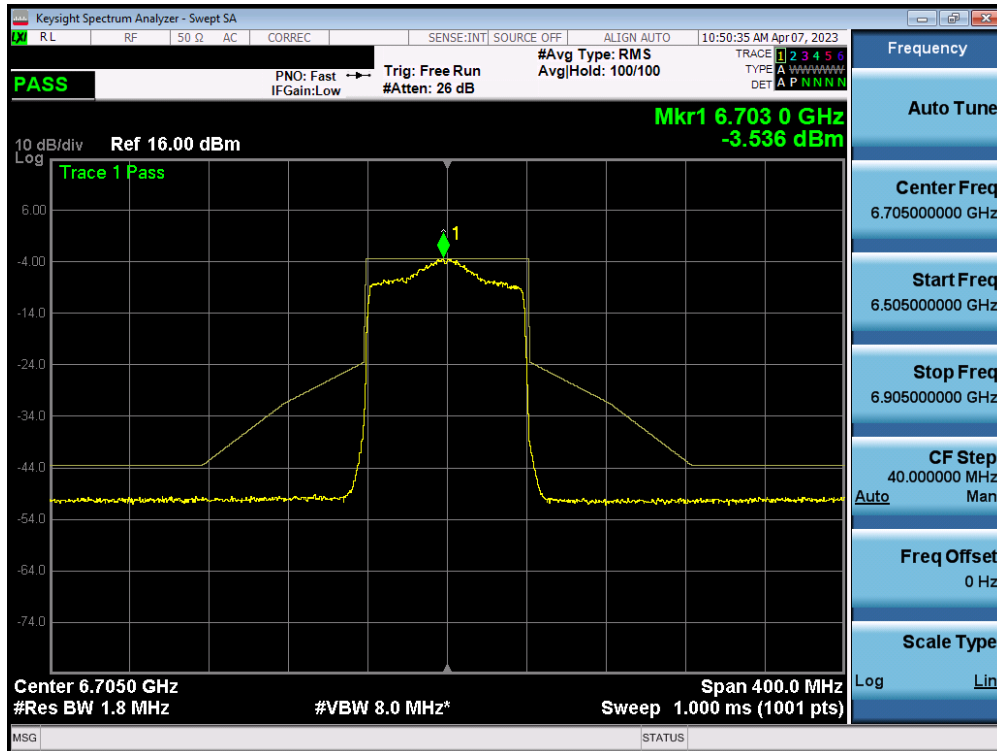


Plot 7-78. In-Band Emission Plot Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

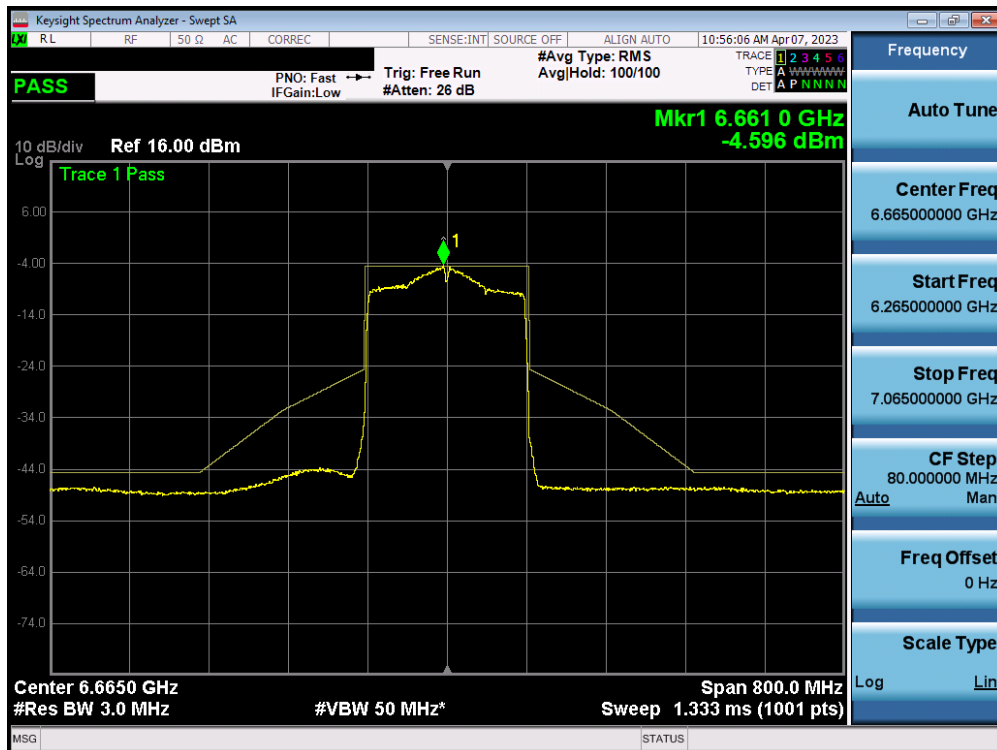


Plot 7-79. In-Band Emission Plot Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 70 of 122

7.5.4 MIMO Antenna-1 In-Band Emission Plot Measurement - (UNII Band 8)

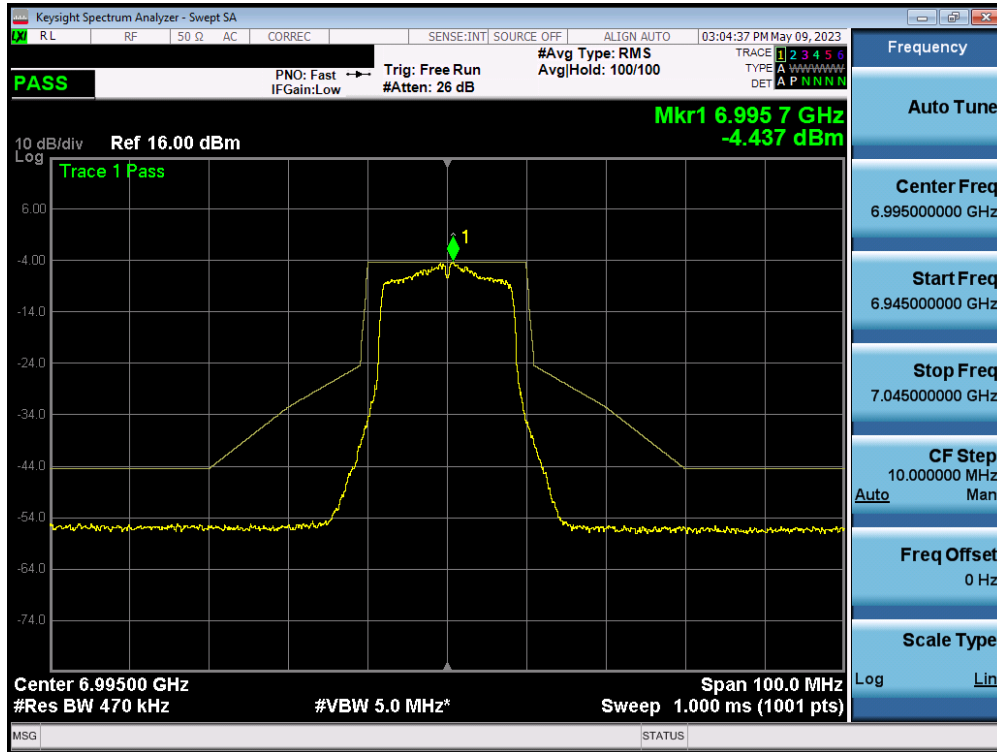


Plot 7-80. In-Band Emission Plot Measurement MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 209)

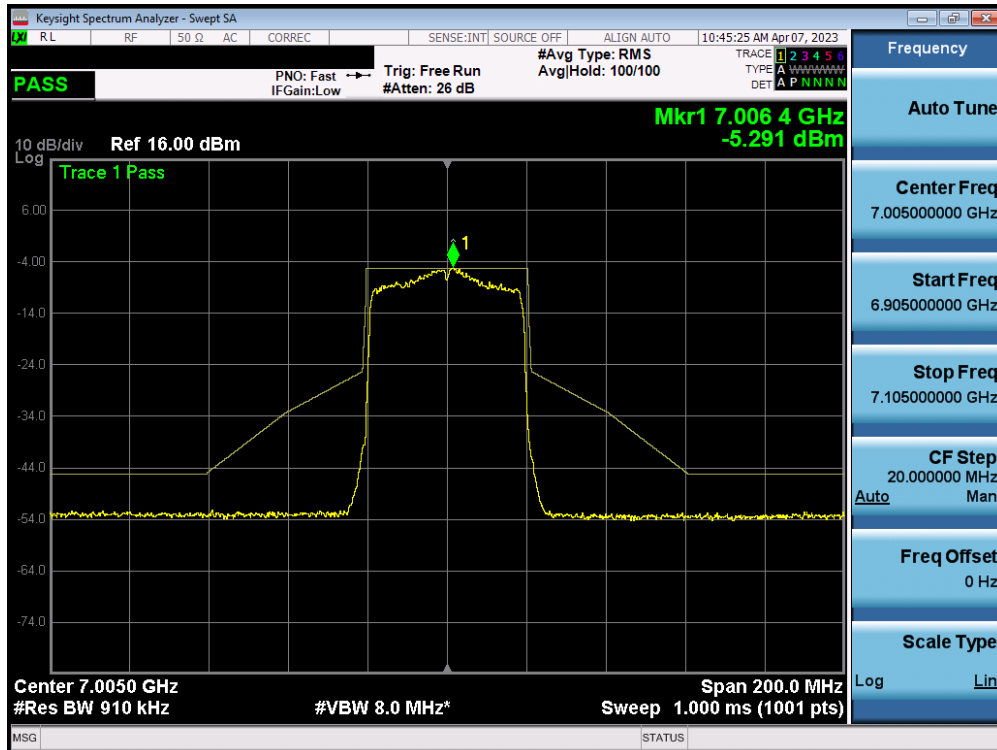


Plot 7-81. In-Band Emission Plot Measurement MIMO ANT1 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 71 of 122

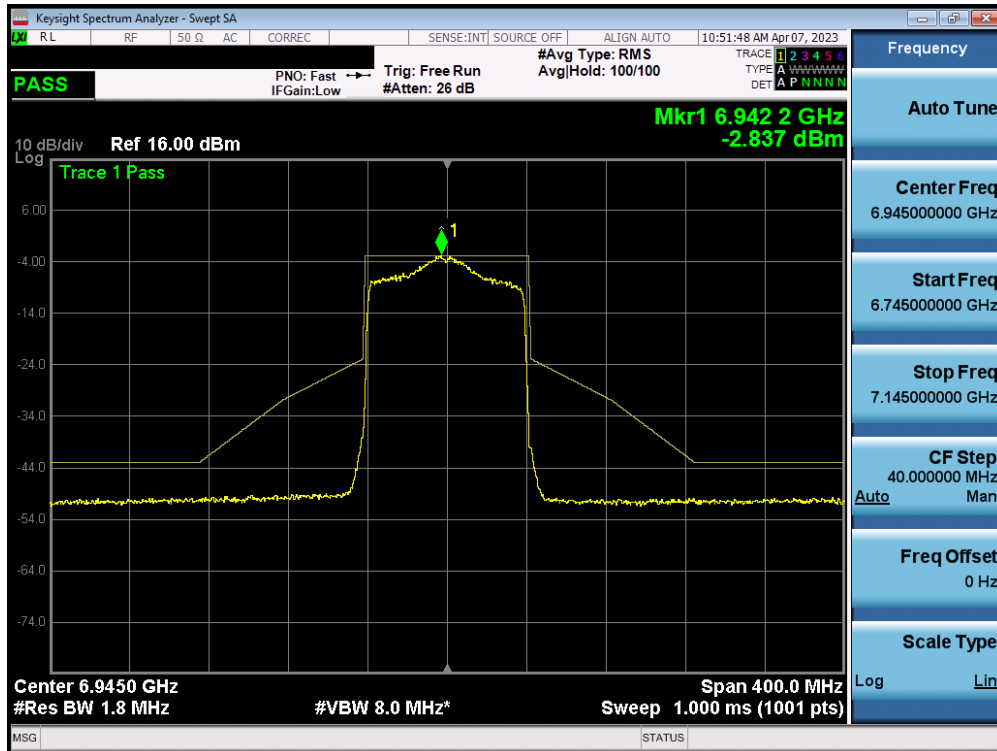

Plot 7-82. In-Band Emission Plot Measurement MIMO ANT1 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

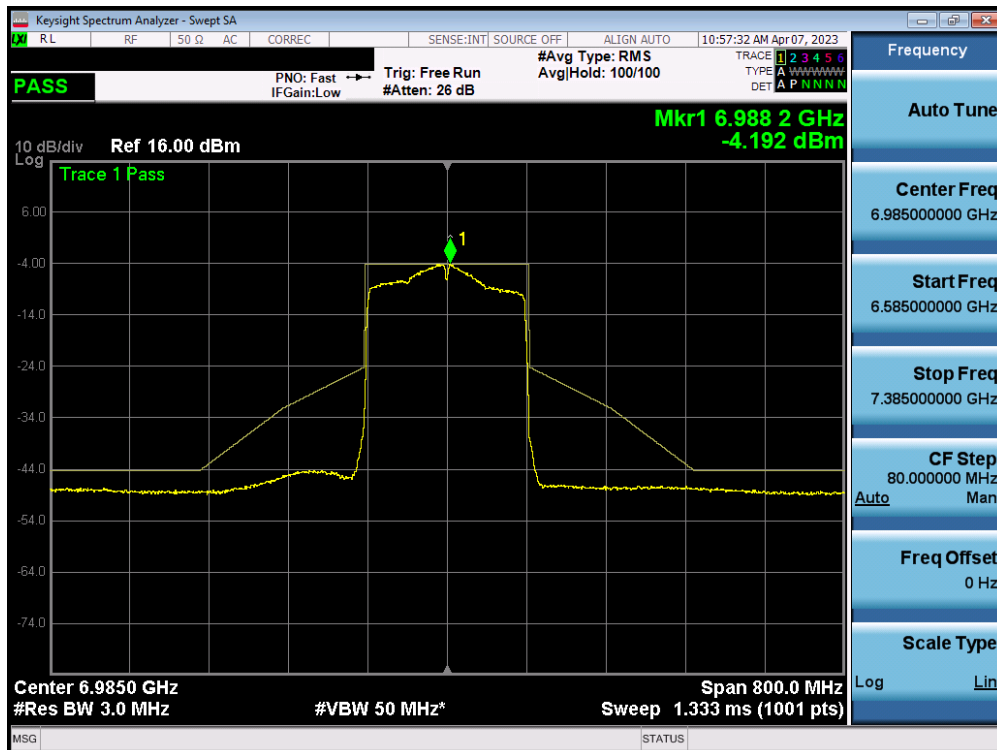

Plot 7-83. In-Band Emission Plot Measurement MIMO ANT1 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: A3LSMF731JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260059-14-R1.A3L	Test Dates: 3/4 – 5/26/2023	EUT Type: Portable Handset	Page 72 of 122