

MEASUREMENT REPORT

FCC PART 15.247 Bluetooth

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

04/22/21 - 06/22/21

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2104190044-07.A3L

FCC ID:

A3LSMF926B

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F926B

Additional Model(s):

SM-F926B/DS

EUT Type:

Portable Handset

Max. RF Output Power:

64.565 mW (17.56 dBm) Peak Conducted

Frequency Range:

2402 – 2480MHz

Type of Modulation:

GFSK, $\pi/4$ -DQPSK, 8DPSK

FCC Classification:

FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2


Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02, KDB 648474 D03

v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 1 of 95

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	4
2.4	Test Configuration	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	AC Line Conducted Emissions	6
3.3	Radiated Emissions.....	7
3.4	Environmental Conditions.....	7
4.0	ANTENNA REQUIREMENTS	8
5.0	MEASUREMENT UNCERTAINTY	9
6.0	TEST EQUIPMENT CALIBRATION DATA	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	20dB Bandwidth Measurement	12
7.3	Output Power Measurement.....	23
7.4	Band Edge Compliance.....	62
7.5	Carrier Frequency Separation	67
7.6	Time of Occupancy.....	69
7.7	Number of Hopping Channels	71
7.8	Conducted Spurious Emissions.....	73
7.9	Radiated Spurious Emission Measurements – Above 1GHz.....	80
7.10	Radiated Restricted Band Edge Measurements.....	86
7.11	Radiated Spurious Emissions Measurements – Below 1GHz	87
7.12	Line Conducted Measurement Data	91
8.0	CONCLUSION.....	95

FCC ID: A3LSMF926B	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset	Page 2 of 95

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 3 of 95

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF926B**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: 1578M, 1580M, 20424M, 2038M, 2044M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (n5, n66), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Frequency/ Channel Operations

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 0 Gain (dBi)	Antenna 1 Gain (dBi)
2.4	-1.54	-5.43

Table 2-2. Antenna Peak Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

FCC ID: A3LSMF926B	 MEASUREMENT REPORT (CERTIFICATION) 	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset
		Page 4 of 95

2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was also used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, and 7.8 for antenna port conducted emissions test setups.

This device supports two configurations: one is with screen open and one is with screen closed. Both configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF926B	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 5 of 95

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMF926B	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 6 of 95

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMF926B	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset	Page 7 of 95

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMF926B	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 8 of 95

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF926B	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset	Page 9 of 95

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	BT1	Bluetooth Cable Set	2/23/2021	Annual	2/23/2022	BT1
Agilent	N4010A	Wireless Connectivity Test Set	N/A			GB46170464
Agilent	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Agilent	N9020A	MXA Signal Analyzer	8/4/2020	Annual	8/4/2021	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/17/2020	Annual	7/17/2021	MY52350166
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Biennial	8/7/2021	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	2/25/2021	Annual	2/25/2022	NMLC-2
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	3/4/2021	Annual	3/4/2022	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset	Page 10 of 95	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
FCC ID: A3LSMF926B
Method/System: Frequency Hopping Spread Spectrum (FHSS)
Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)(iii)	RSS-247 [5.1(1)]	20dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.247(b)(1)	RSS-247 [5.4(2)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(2)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	Conducted > 20dBc		PASS	Section 7.4, Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10, Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
- 6) Due to ePA Conducted Power measurement is the worst case, all additional testing was done in ePA mode.

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset	Page 11 of 95	

7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(1)]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 12 of 95

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	864.30
2441	1.0	GFSK	ePA	39	936.20
2480	1.0	GFSK	ePA	78	930.30
2402	2.0	$\pi/4$ -DQPSK	ePA	0	1353.00
2441	2.0	$\pi/4$ -DQPSK	ePA	39	1343.00
2480	2.0	$\pi/4$ -DQPSK	ePA	78	1353.00
2402	3.0	8DPSK	ePA	0	1332.00
2441	3.0	8DPSK	ePA	39	1246.00
2480	3.0	8DPSK	ePA	78	1314.00

Table 7-2. Conducted 20dB Bandwidth Measurements Antenna 0

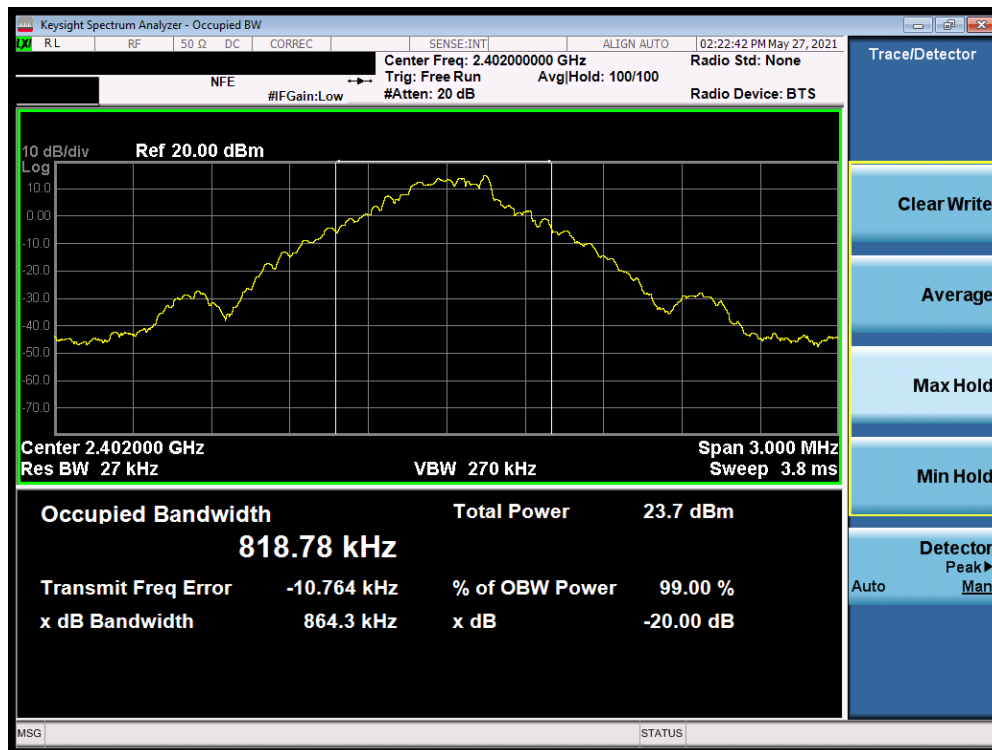


Plot 7-1. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 0) Antenna 0

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 13 of 95




Plot 7-2. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 39) Antenna 0

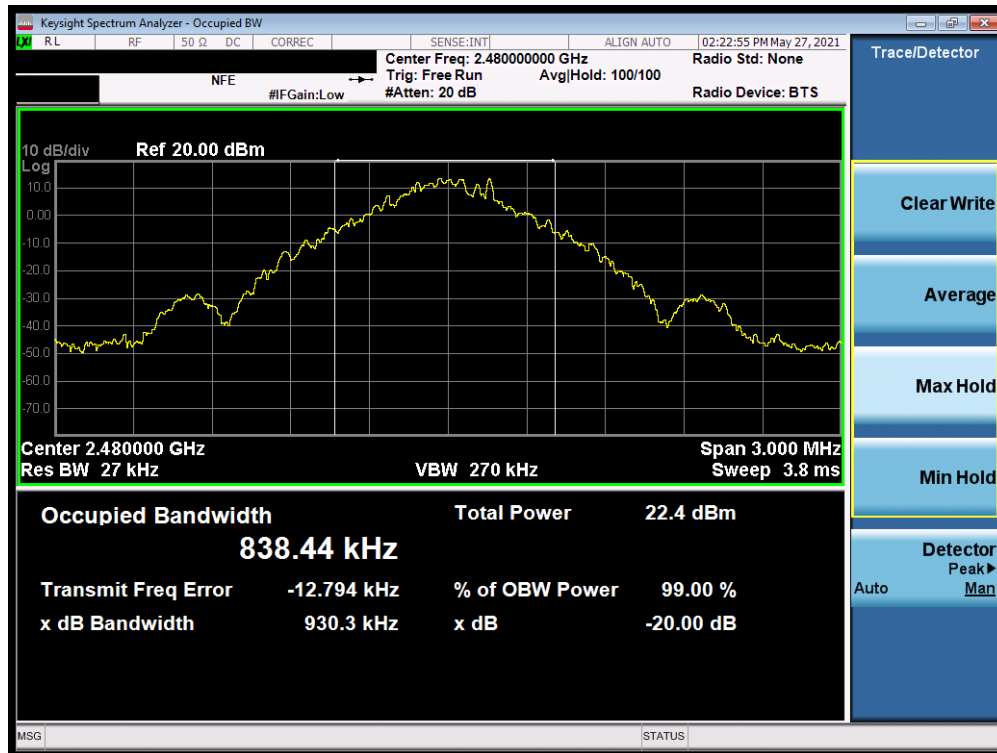


Plot 7-3. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 78) Antenna 0

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 14 of 95

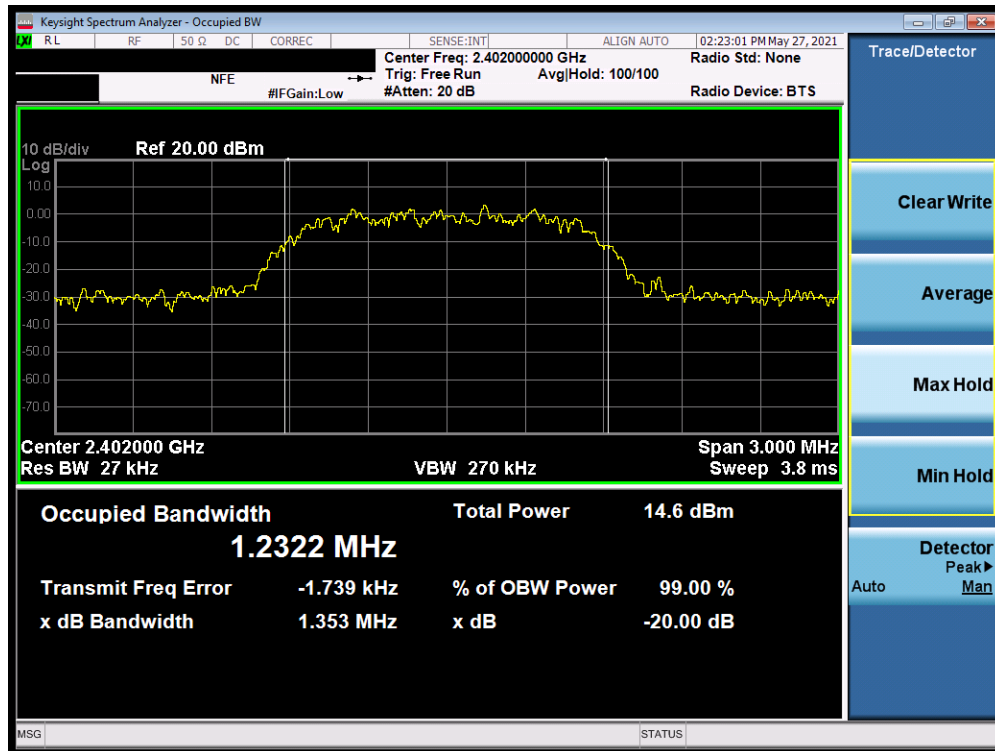


Plot 7-4. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 0) Antenna 0

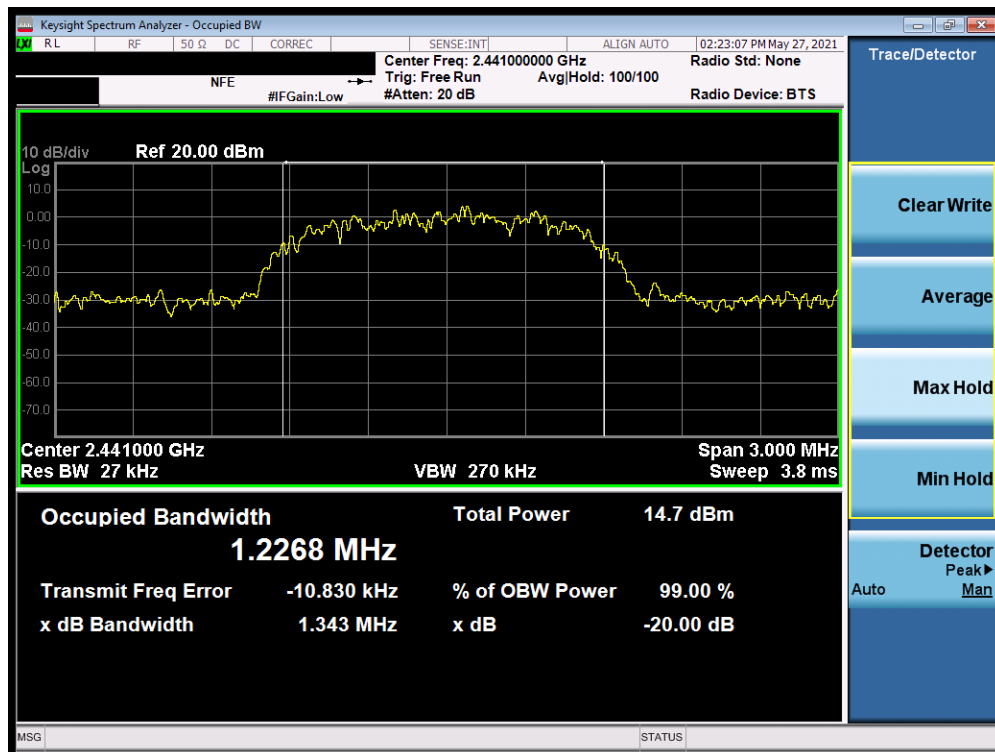


Plot 7-5. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 39) Antenna 0

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 15 of 95

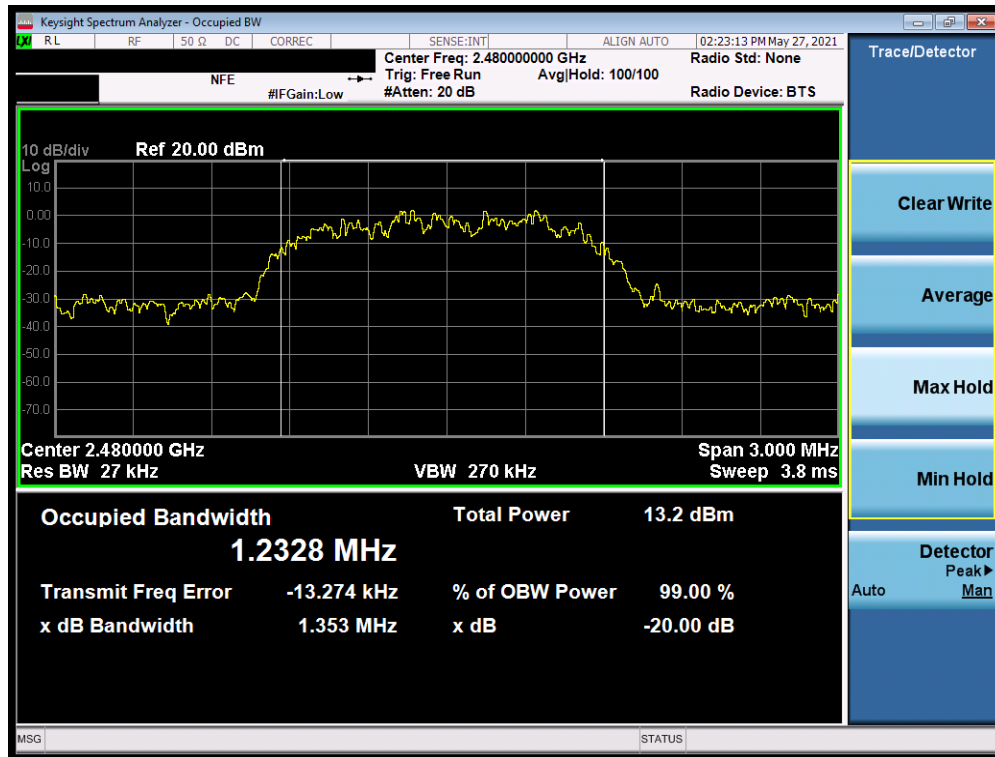


Plot 7-6. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 78) Antenna 0

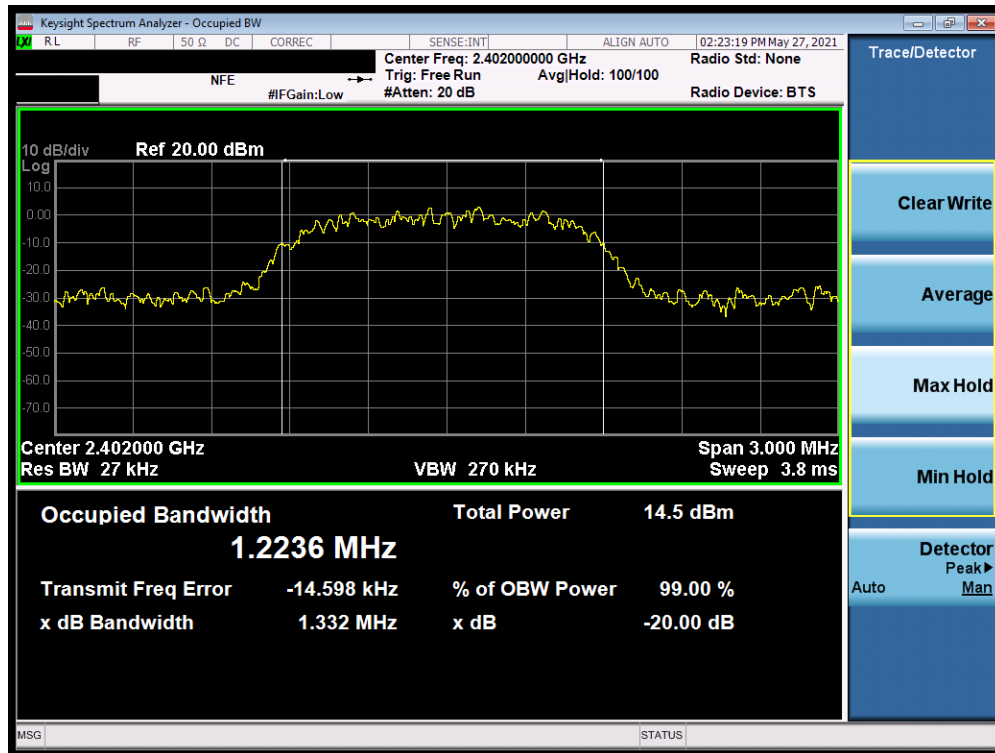


Plot 7-7. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 0) Antenna 0

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 16 of 95

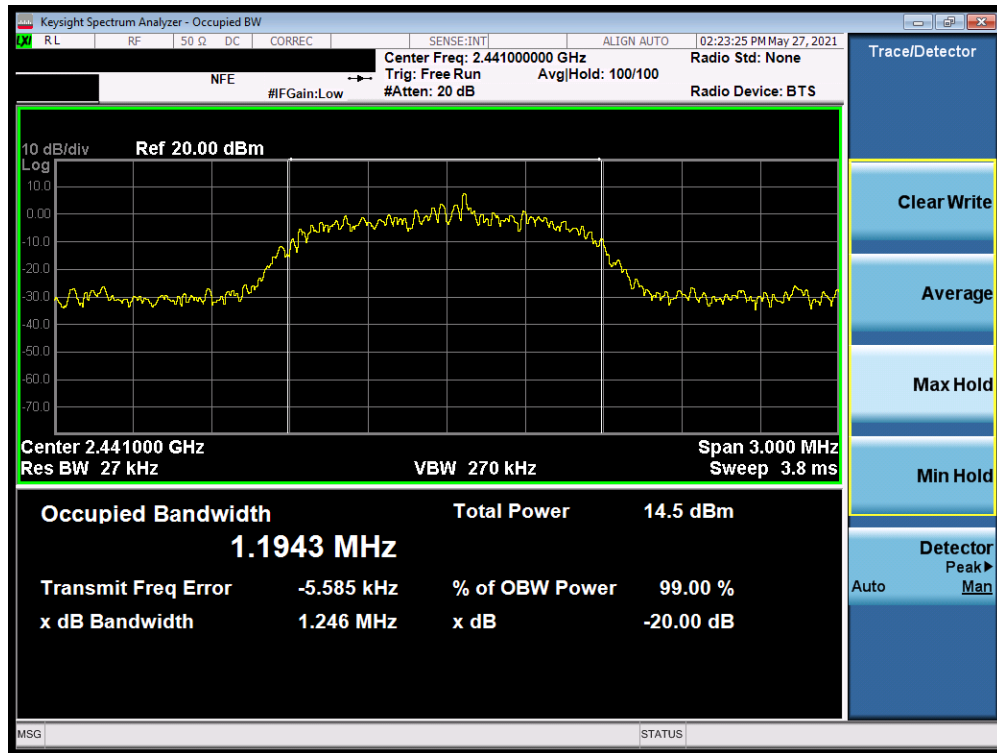

Plot 7-8. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 39) Antenna 0

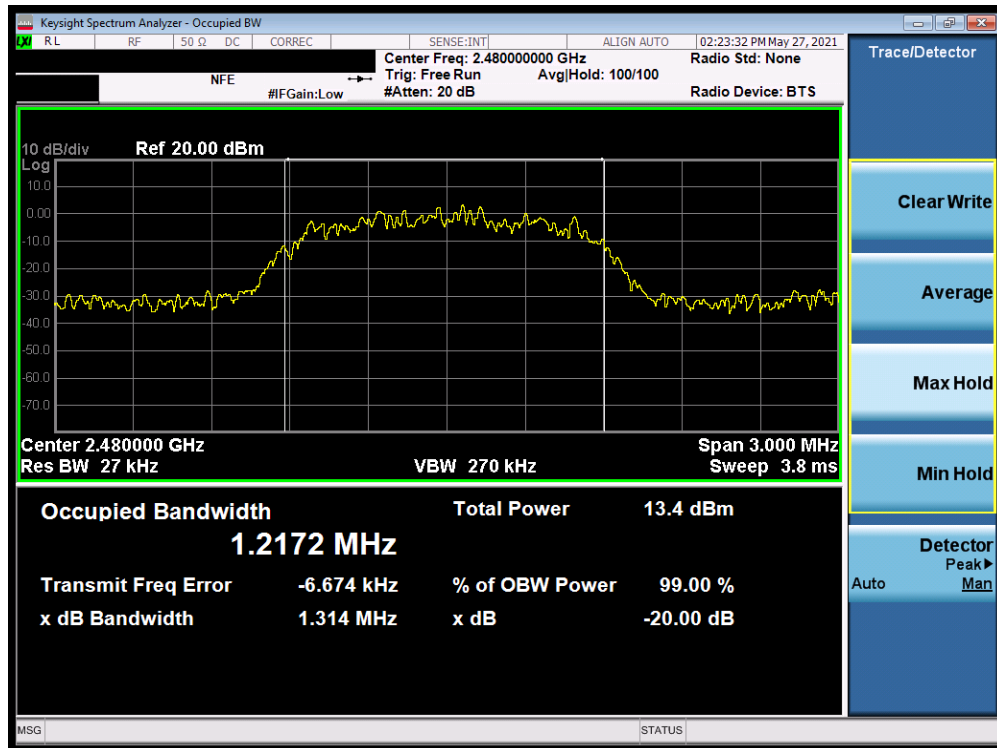


Plot 7-9. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 78) Antenna 0

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 17 of 95


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results
2402	1.0	GFSK	ePA	0	864.20
2441	1.0	GFSK	iPA	39	920.80
2480	1.0	GFSK	iPA	78	929.60
2402	2.0	$\pi/4$ -DQPSK	ePA	0	1338.00
2441	2.0	$\pi/4$ -DQPSK	ePA	39	1333.00
2480	2.0	$\pi/4$ -DQPSK	ePA	78	1340.00
2402	3.0	8DPSK	ePA	0	1325.00
2441	3.0	8DPSK	ePA	39	1334.00
2480	3.0	8DPSK	ePA	78	1307.00

Table 7-3. Conducted 20dB Bandwidth Measurements Antenna 1

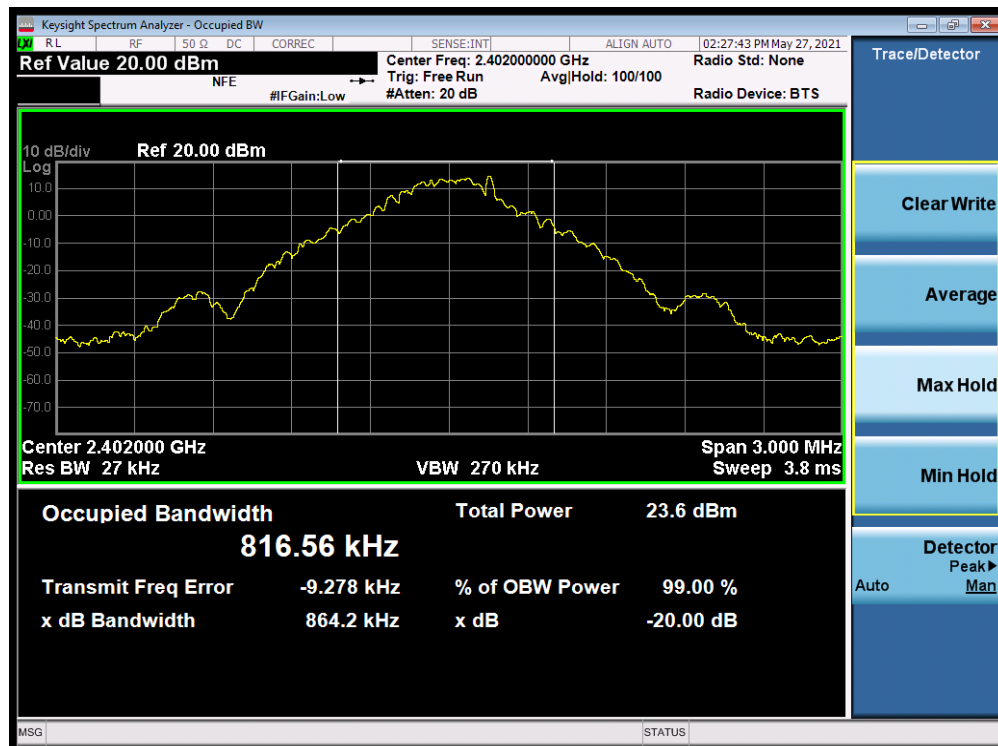

Plot 7-10. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 0) Antenna 1

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 18 of 95

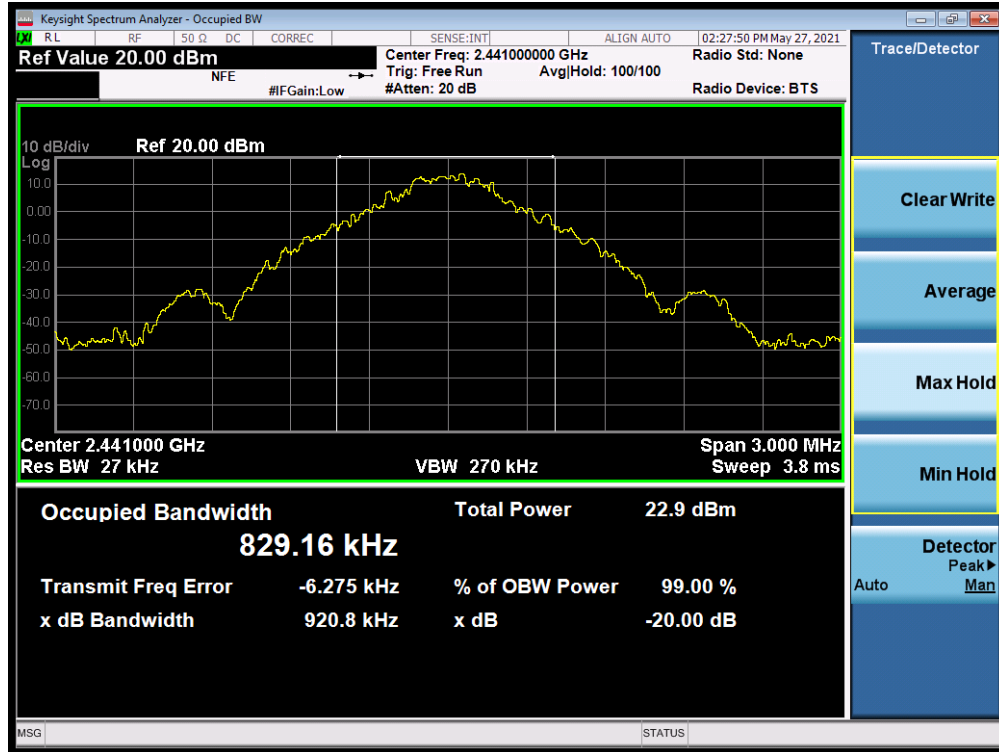


Plot 7-11. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 39) Antenna 1




Plot 7-12. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 78) Antenna 1

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 19 of 95

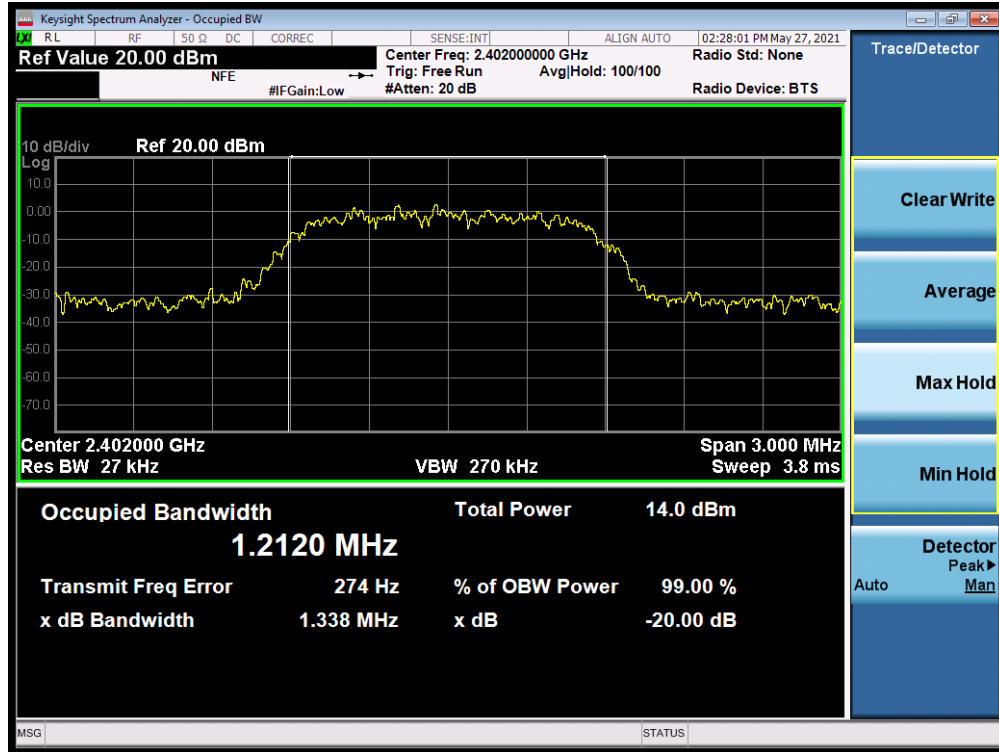


Plot 7-13. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 0) Antenna 1

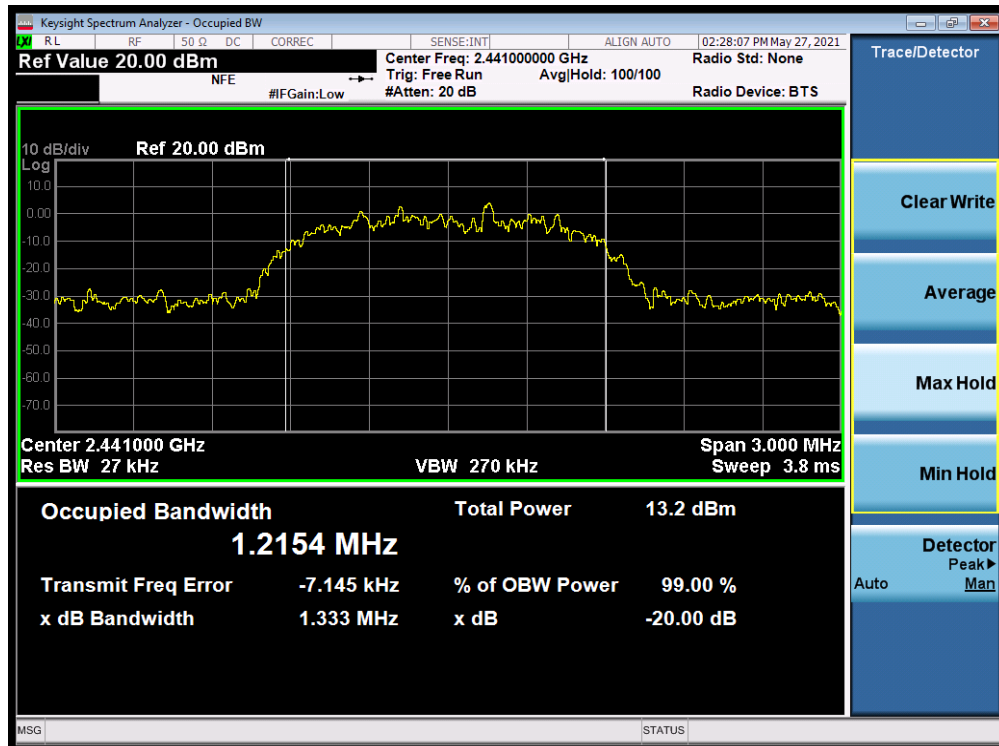


Plot 7-14. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 39) Antenna 1

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 20 of 95

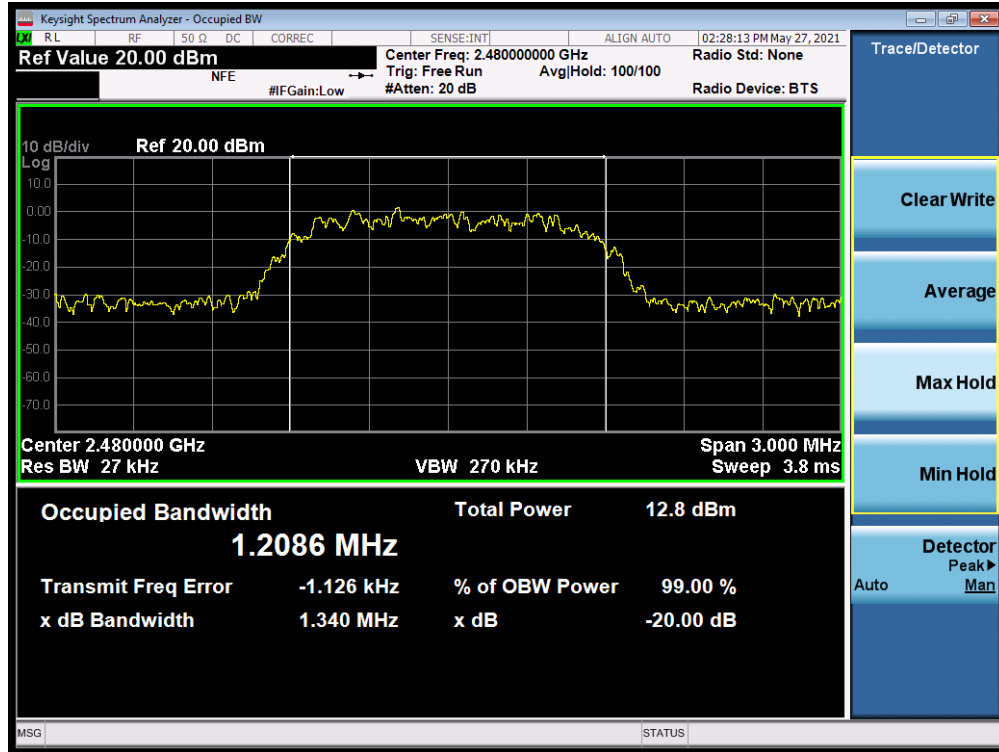


Plot 7-15. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 78) Antenna 1

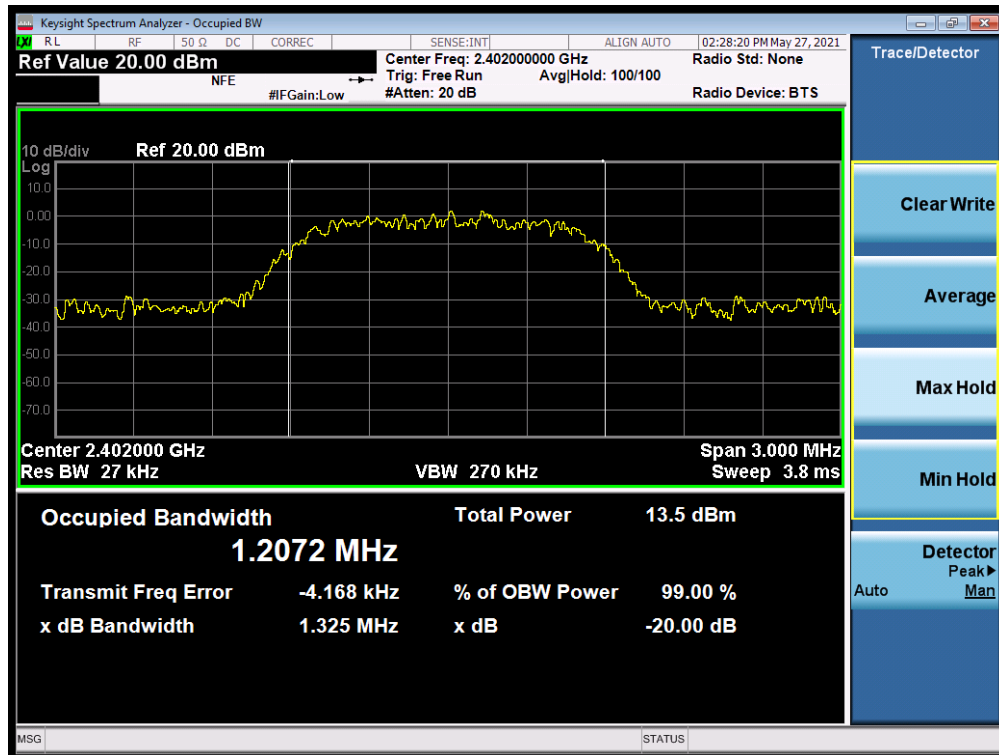


Plot 7-16. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 0) Antenna 1

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 21 of 95

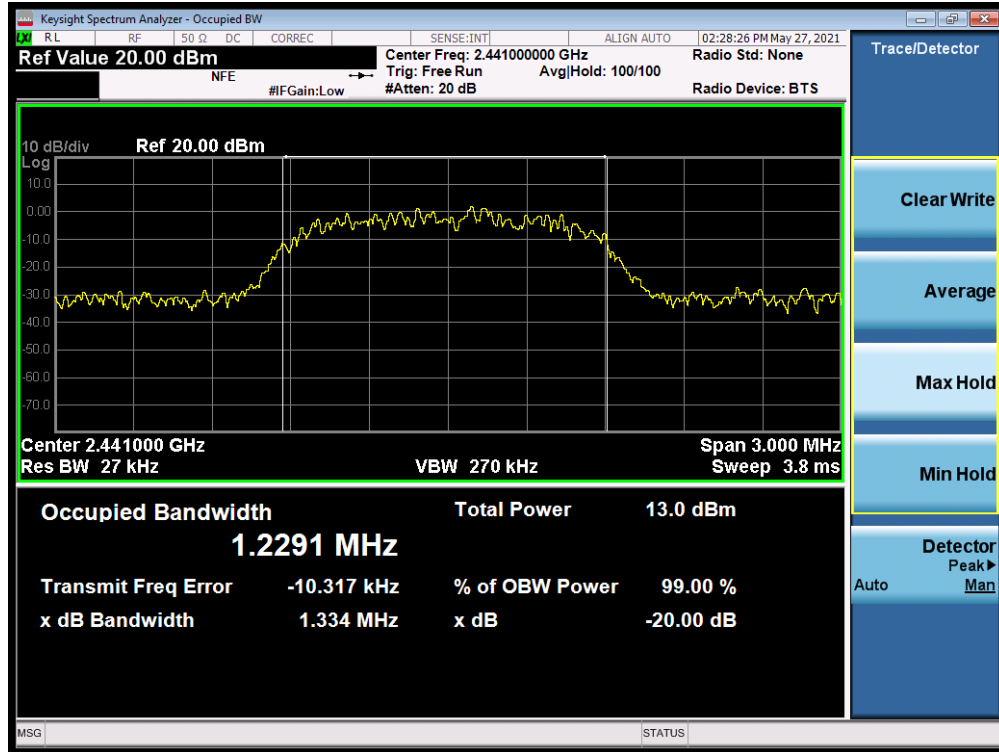

Plot 7-17. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 39) Antenna 1

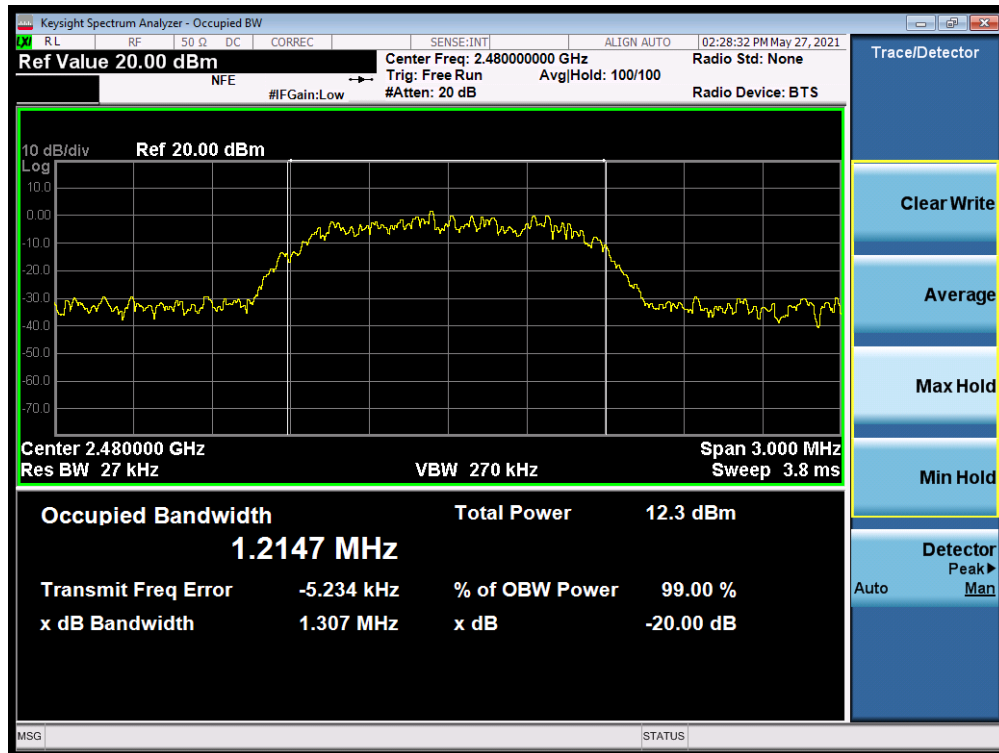

Plot 7-18. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 78) Antenna 1

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 22 of 95

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(2)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. The powers shown below were measured using a spectrum analyzer with a Bluetooth signaling test set (Agilent Model: N4010A) used only to maintain a Bluetooth link with the EUT. Average power measurements are performed using the analyzer's "burst power" function with RBW = 3MHz. The burst power function triggers on a single set burst set to maximum power and measures the maximum average power on the on-time.

The maximum permissible output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

Test Settings

Peak Power Measurement

1. Span = approximately 5x 20dB bandwidth, centered on hopping channel
2. RBW > 20dB bandwidth of emission being measured
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Note

This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at 1Mbps. Final results were obtained using calibrated couplers, attenuators and cables. The following formula was used:


FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 23 of 95

Output Power (dBm) = Raw Analyzer Level (dBm) + Cable Loss (dB) + Loss in Directional Coupler/Insertion Loss (dB)


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Avg Conducted Power		Ant. Gain [dBi]	EIRP	Limit	Margin
					[dBm]	[mW]	[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	17.37	62.661	16.90	54.723	-2.55	14.82	36.02	-21.20
2441	1.0	GFSK	ePA	39	17.56	64.536	17.29	60.102	-1.61	15.95	36.02	-20.07
2480	1.0	GFSK	ePA	78	17.17	43.974	16.85	39.554	-1.71	15.46	36.02	-20.56
2402	1.0	GFSK	iPA	0	16.76	62.445	16.43	57.321	-2.55	14.21	36.02	-21.81
2441	1.0	GFSK	iPA	39	17.16	64.565	16.83	61.076	-1.61	15.55	36.02	-20.47
2480	1.0	GFSK	iPA	78	16.33	44.045	16.22	40.089	-1.71	14.62	36.02	-21.40
2402	2.0	$\pi/4$ -DQPSK	ePA	0	16.78	52.276	13.88	28.642	-2.55	14.22	36.02	-21.80
2441	2.0	$\pi/4$ -DQPSK	ePA	39	16.98	56.624	14.25	31.584	-1.61	15.37	36.02	-20.65
2480	2.0	$\pi/4$ -DQPSK	ePA	78	16.95	39.884	13.91	21.258	-1.71	15.24	36.02	-20.79
2402	2.0	$\pi/4$ -DQPSK	iPA	0	16.29	53.125	13.57	28.492	-2.55	13.74	36.02	-22.28
2441	2.0	$\pi/4$ -DQPSK	iPA	39	16.44	57.069	13.74	31.715	-1.61	14.83	36.02	-21.19
2480	2.0	$\pi/4$ -DQPSK	iPA	78	15.68	40.532	13.22	20.989	-1.71	13.97	36.02	-22.05
2402	3.0	8DPSK	ePA	0	17.17	58.627	13.93	28.961	-2.55	14.62	36.02	-21.40
2441	3.0	8DPSK	ePA	39	17.39	64.224	14.33	32.195	-1.61	15.78	36.02	-20.24
2480	3.0	8DPSK	ePA	78	17.31	44.086	13.99	21.564	-1.71	15.60	36.02	-20.42
2402	3.0	8DPSK	iPA	0	16.70	58.979	13.66	28.829	-2.55	14.15	36.02	-21.87
2441	3.0	8DPSK	iPA	39	16.81	63.038	14.02	31.458	-1.61	15.20	36.02	-20.82
2480	3.0	8DPSK	iPA	78	16.13	44.679	13.21	20.983	-1.71	14.42	36.02	-21.61

Table 7-4. Conducted Output Power Measurements Antenna 0

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 24 of 95

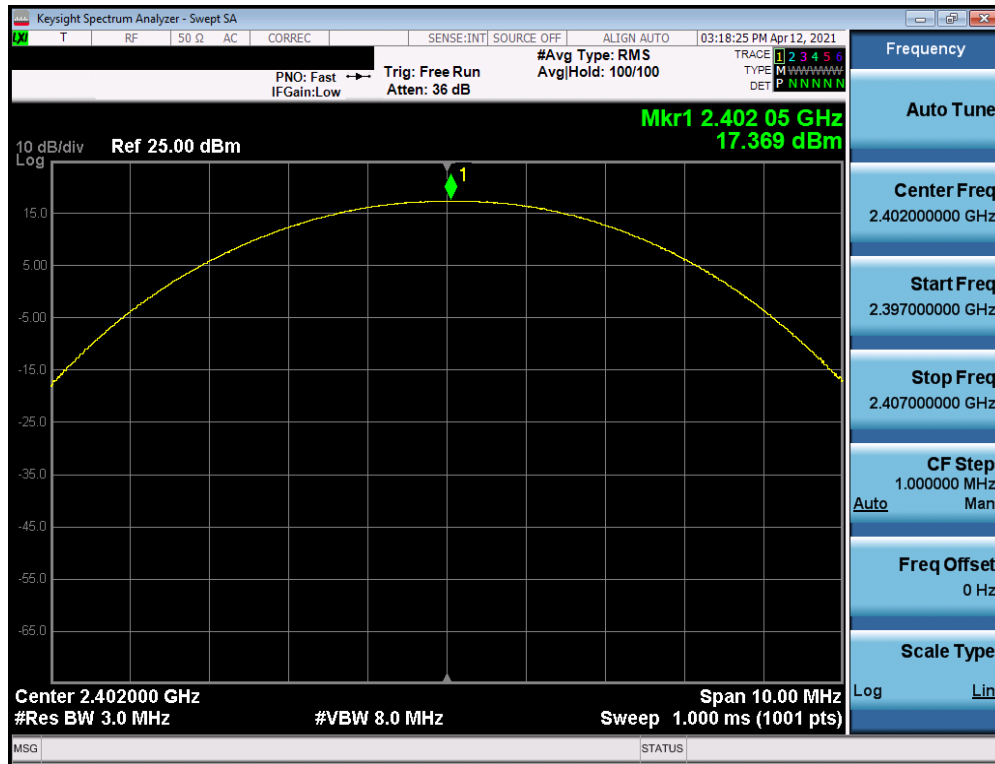


Plot 7-19. Peak Conducted Power (1Mbps – Ch. 0) Antenna 0 - ePA

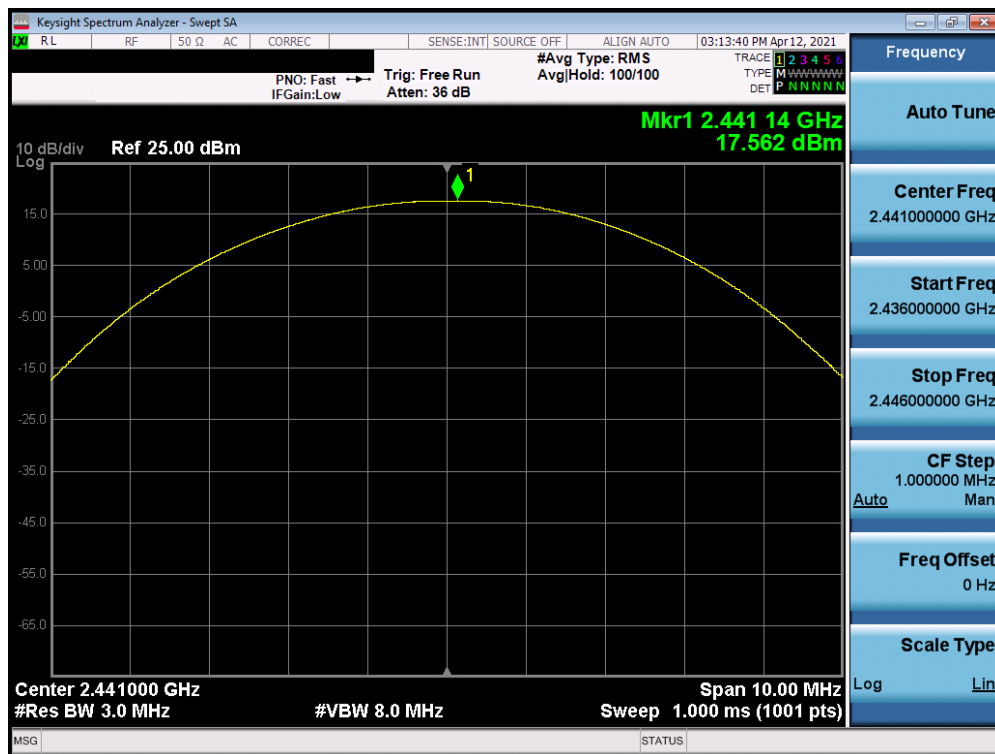


Plot 7-20. Peak Conducted Power (1Mbps – Ch. 39) Antenna 0 - ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 25 of 95

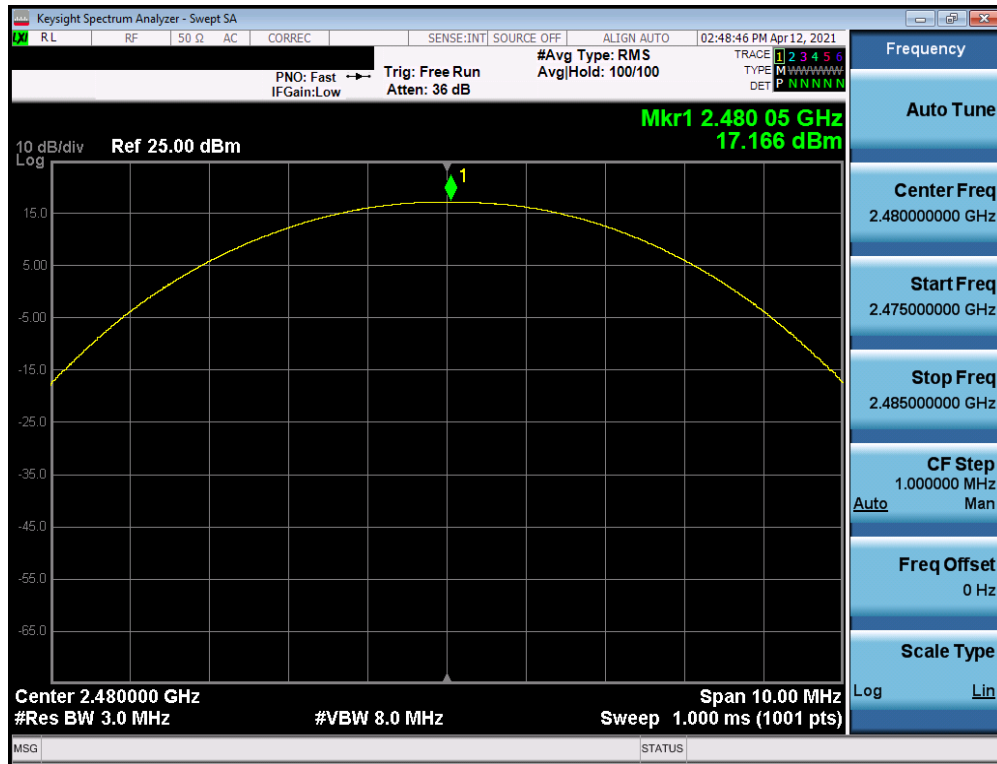


Plot 7-21. Peak Conducted Power (1Mbps – Ch. 78) Antenna 0 – ePA

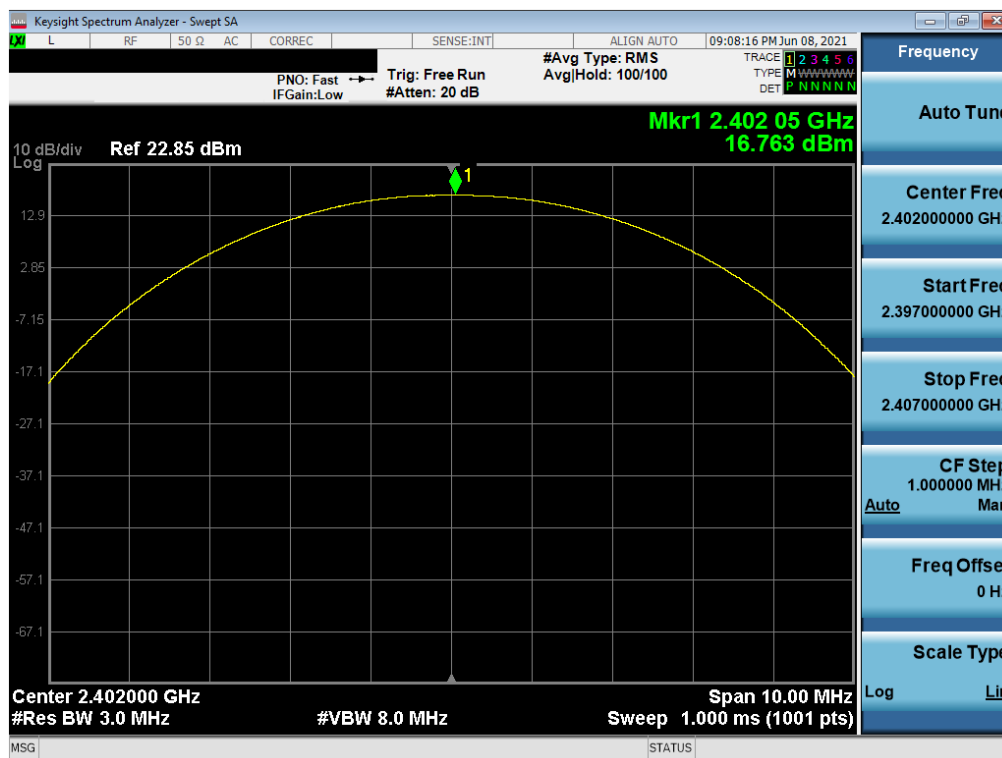


Plot 7-22. Peak Conducted Power (1Mbps – Ch. 0) Antenna 0 - iPA

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 26 of 95

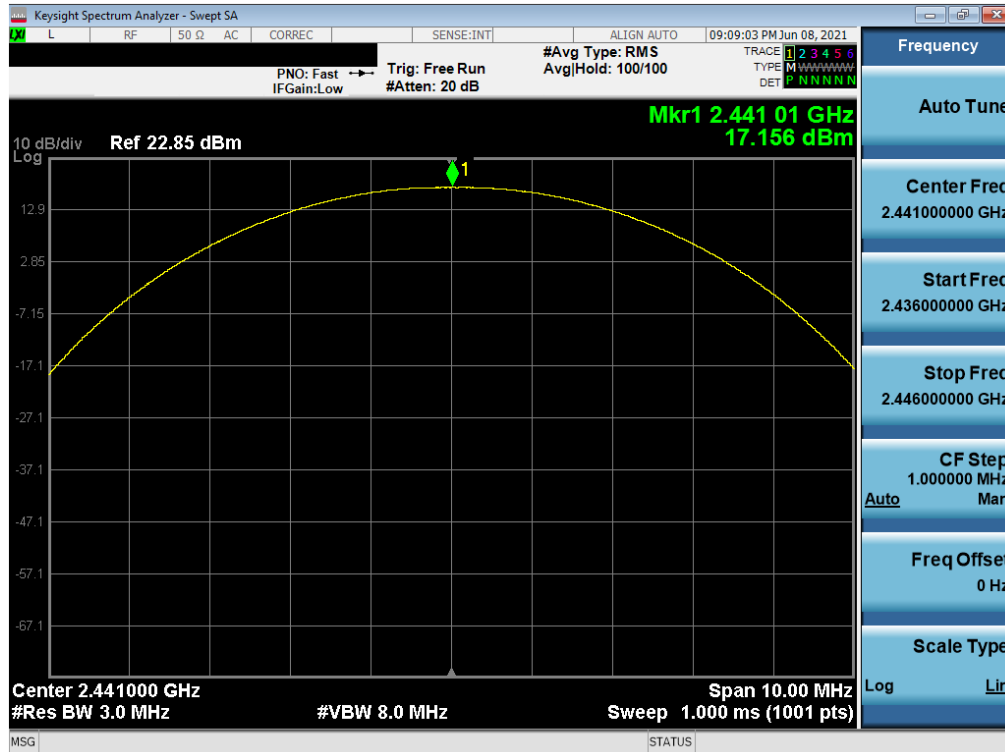


Plot 7-23. Peak Conducted Power (1Mbps – Ch. 39) Antenna 0 - iPA

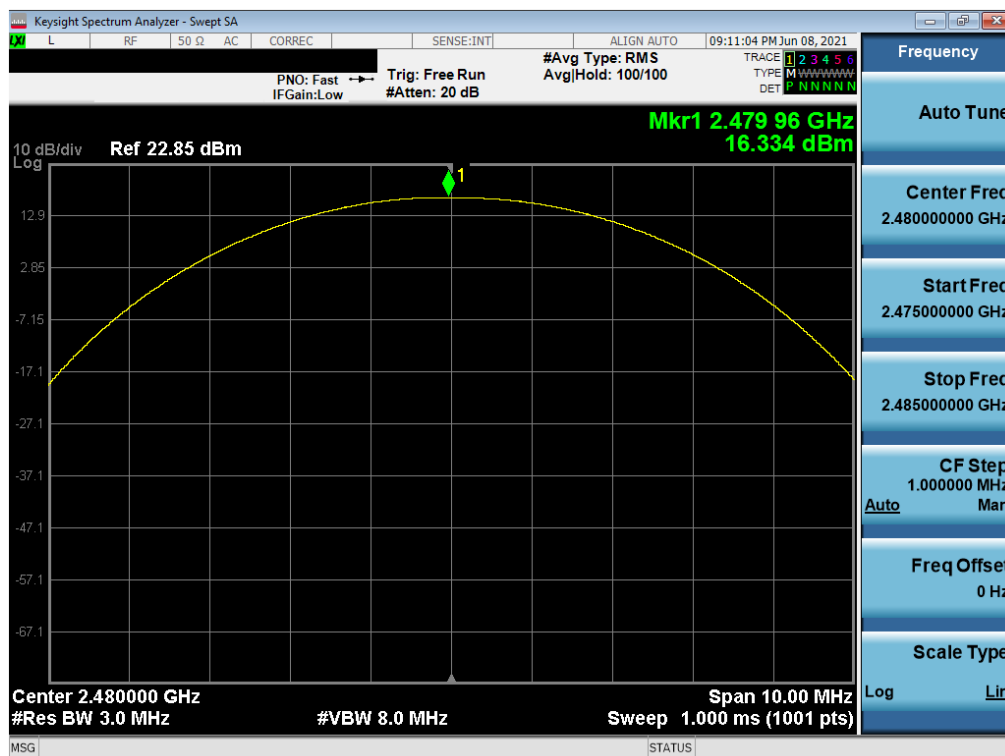


Plot 7-24. Peak Conducted Power (1Mbps – Ch. 78) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 27 of 95

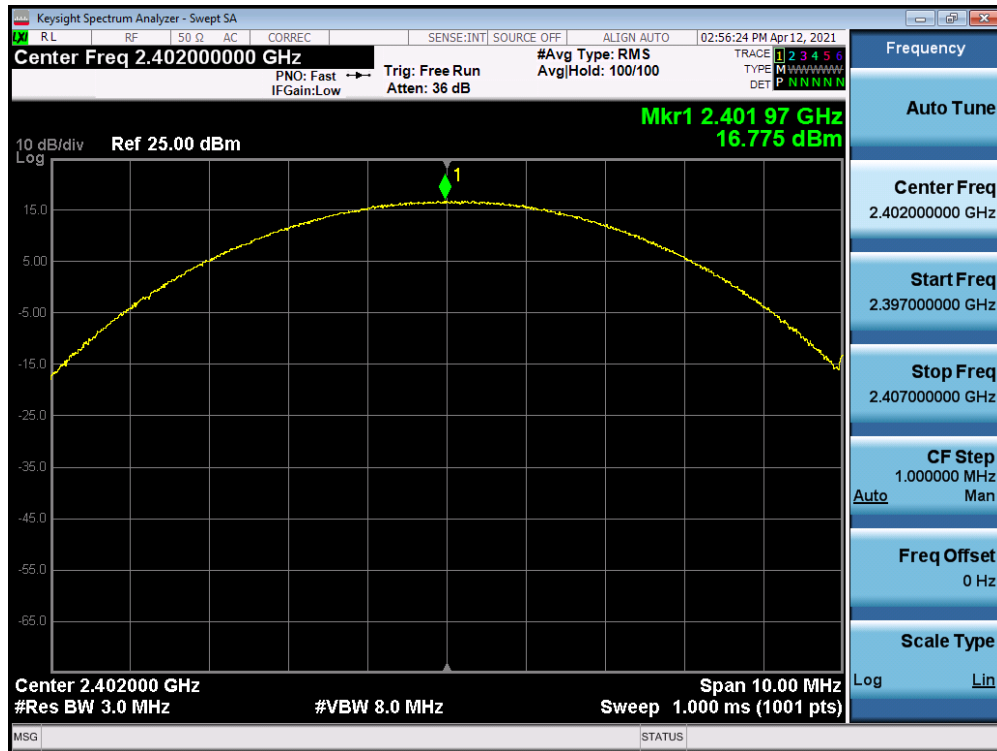


Plot 7-25. Peak Conducted Power (2Mbps – Ch. 0) Antenna 0 - ePA

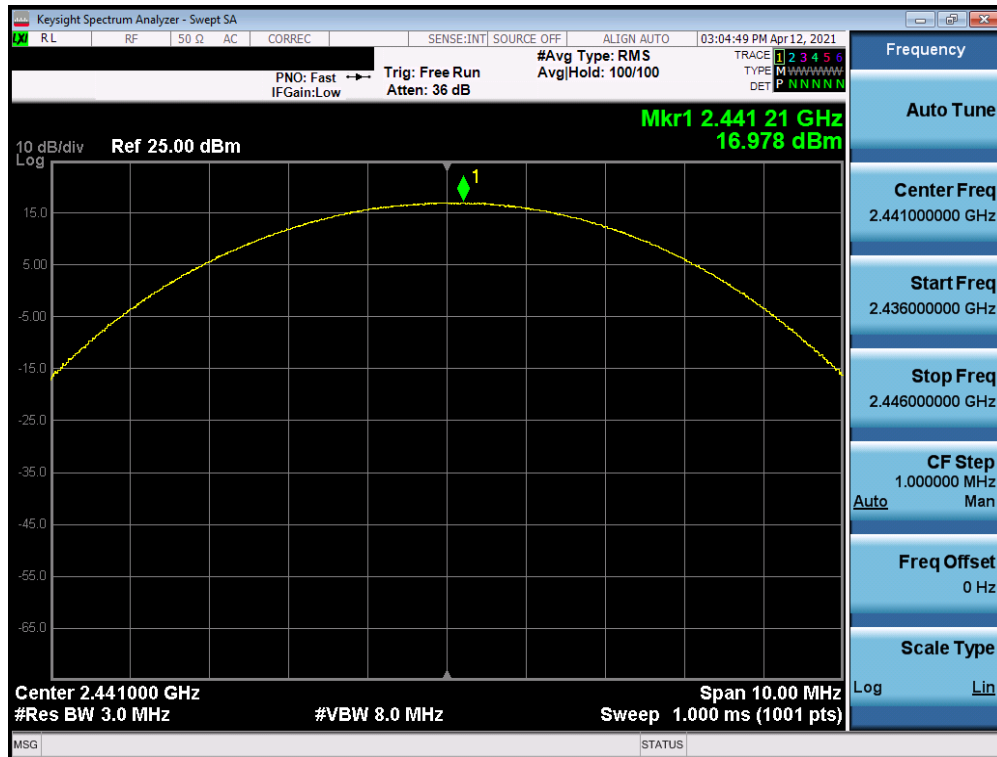


Plot 7-26. Peak Conducted Power (2Mbps – Ch. 39) Antenna 0 - ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 28 of 95

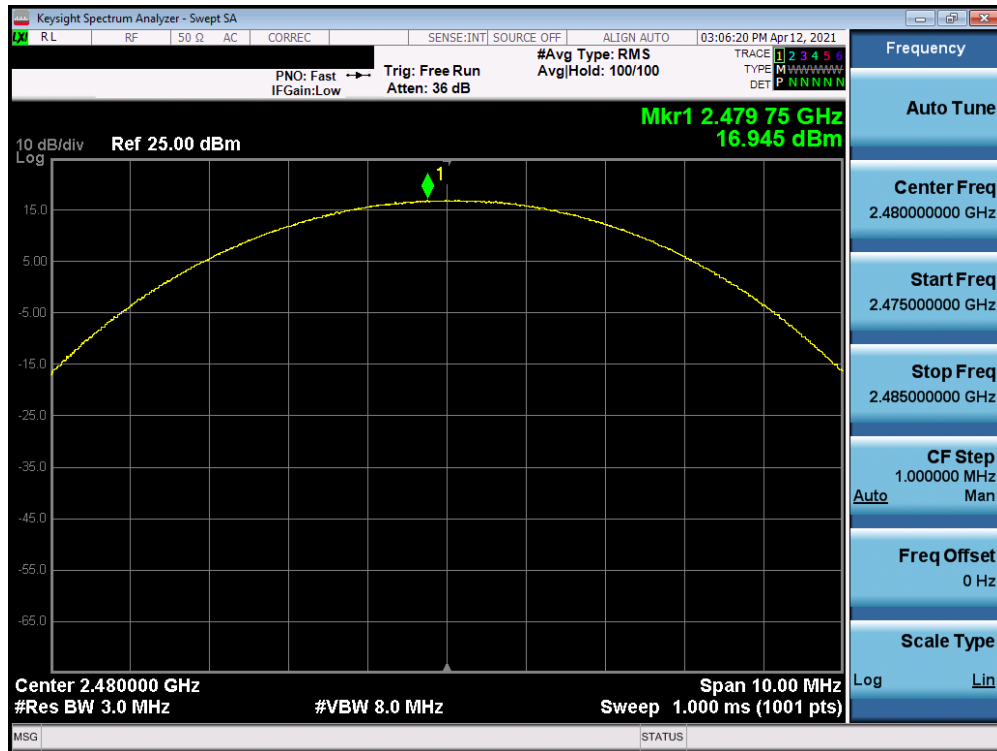


Plot 7-27. Peak Conducted Power (2Mbps – Ch. 78) Antenna 0 – ePA

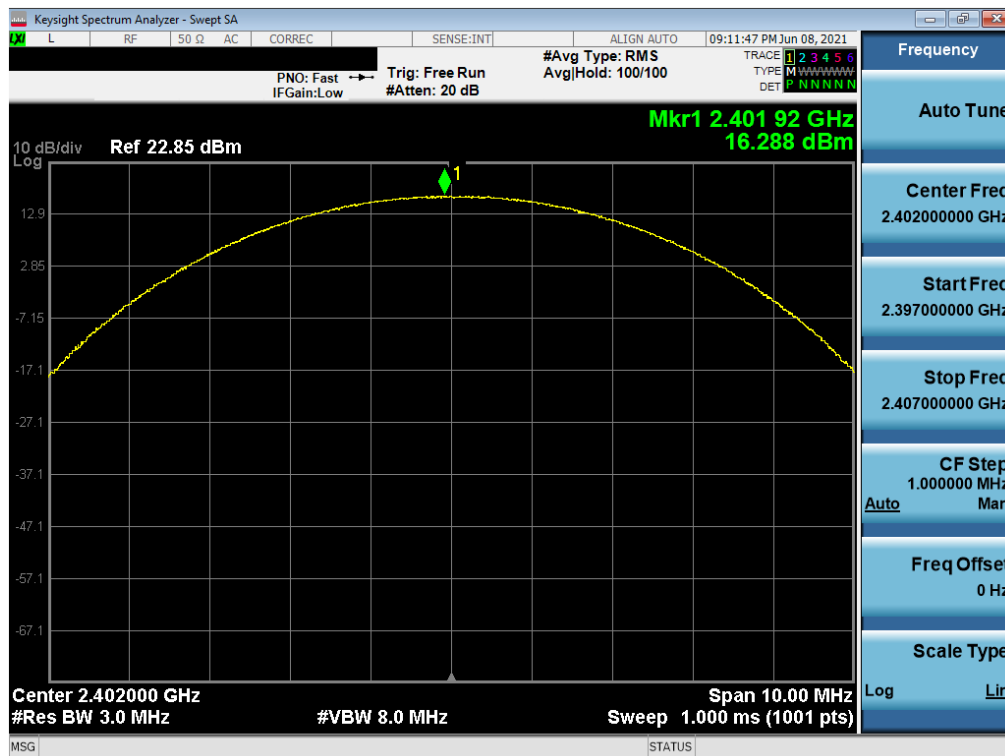


Plot 7-28. Peak Conducted Power (2Mbps – Ch. 0) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 29 of 95

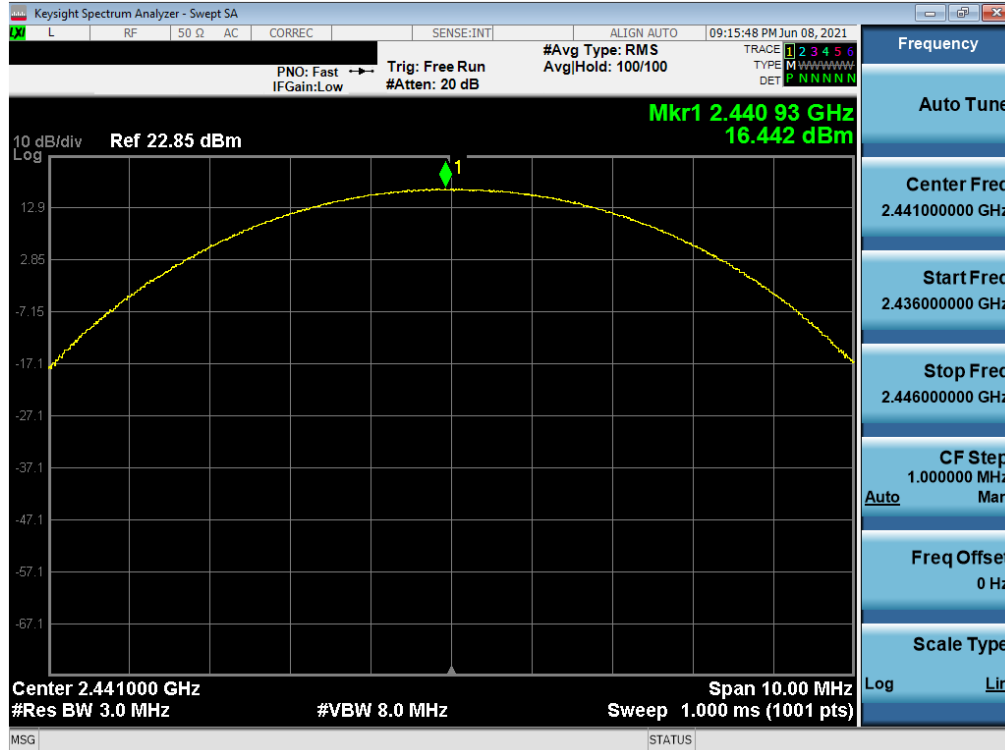


Plot 7-29. Peak Conducted Power (2Mbps – Ch. 39) Antenna 0 - iPA

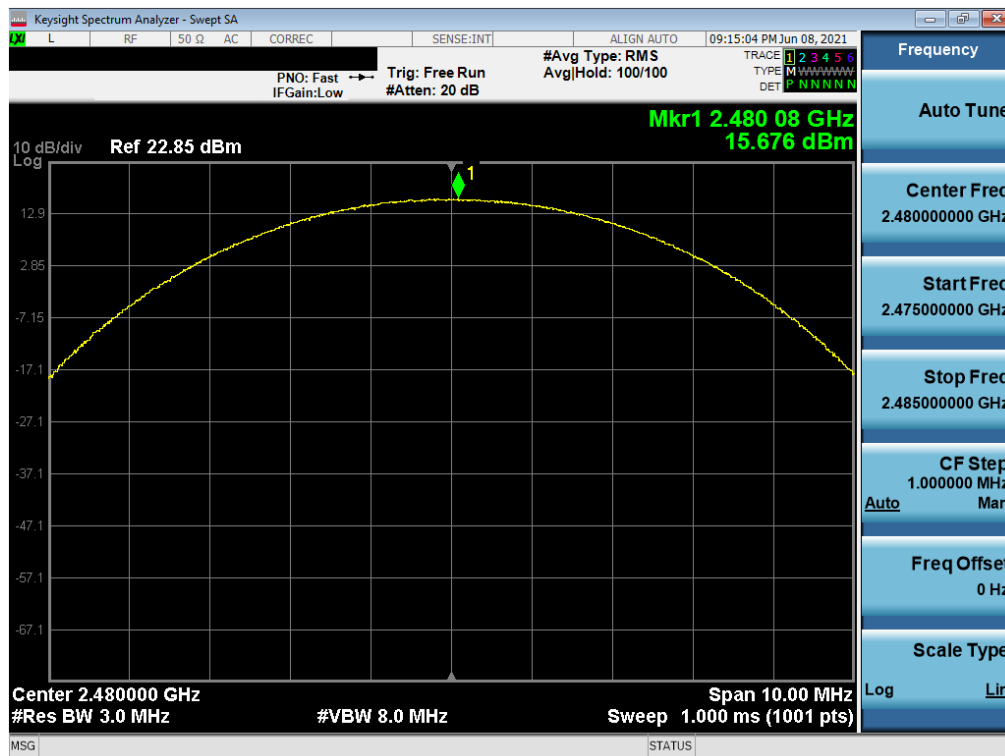


Plot 7-30. Peak Conducted Power (2Mbps – Ch. 78) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 30 of 95

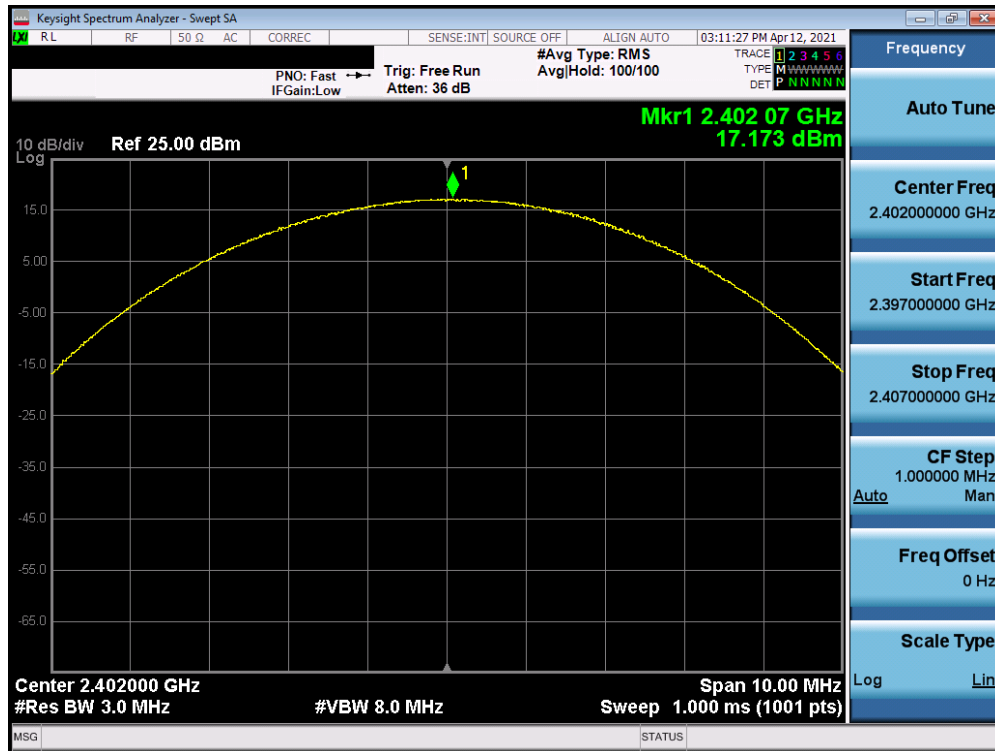


Plot 7-31. Peak Conducted Power (3Mbps – Ch. 0) Antenna 0 - ePA

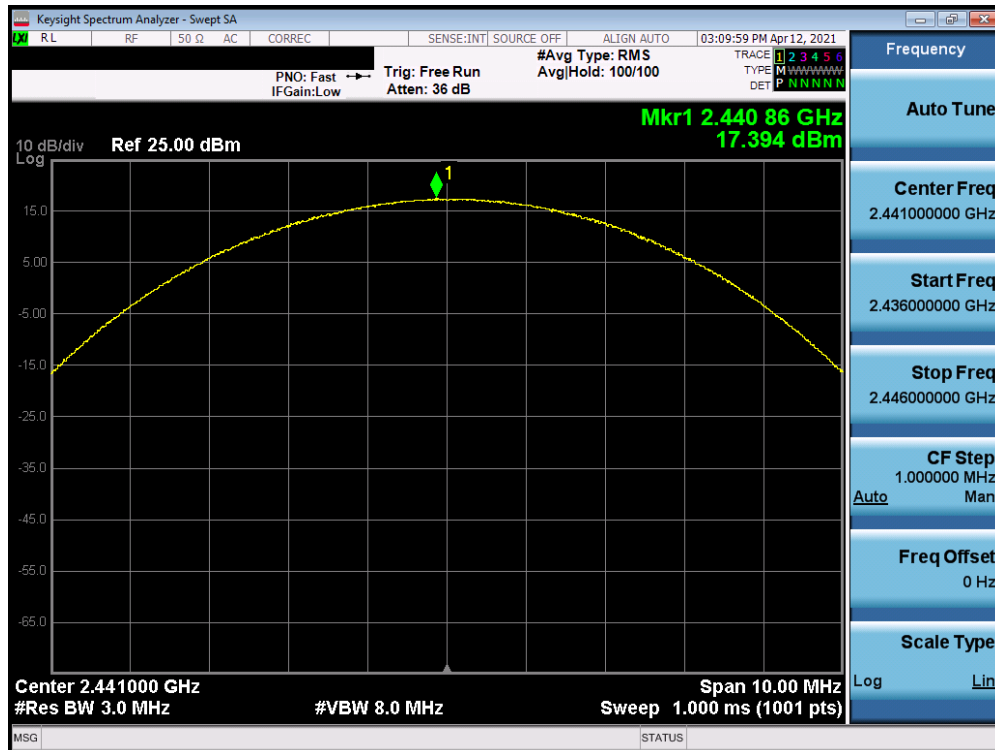


Plot 7-32. Peak Conducted Power (3Mbps – Ch. 39) Antenna 0 - ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 31 of 95

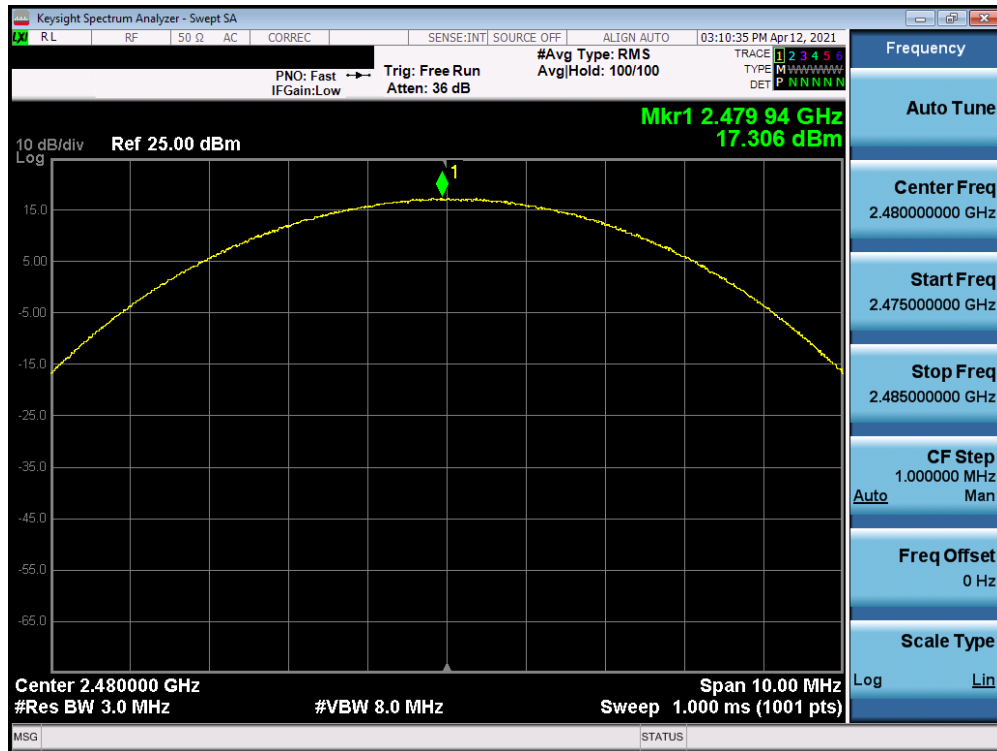


Plot 7-33. Peak Conducted Power (3Mbps – Ch. 78) Antenna 0 – ePA

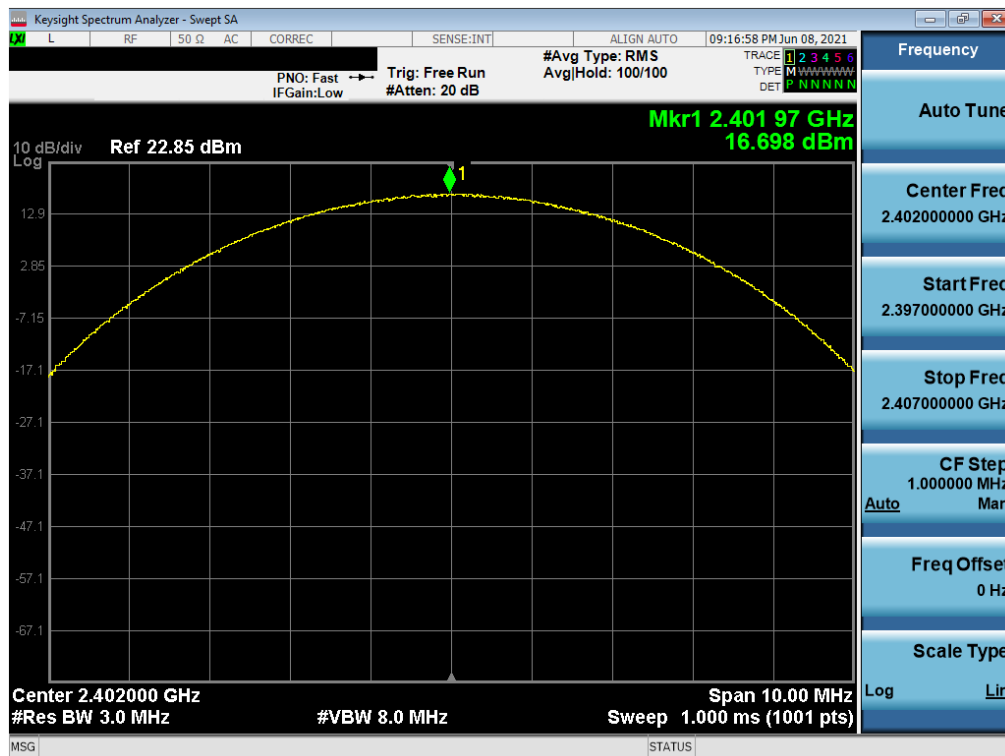


Plot 7-34. Peak Conducted Power (3Mbps – Ch. 0) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 32 of 95

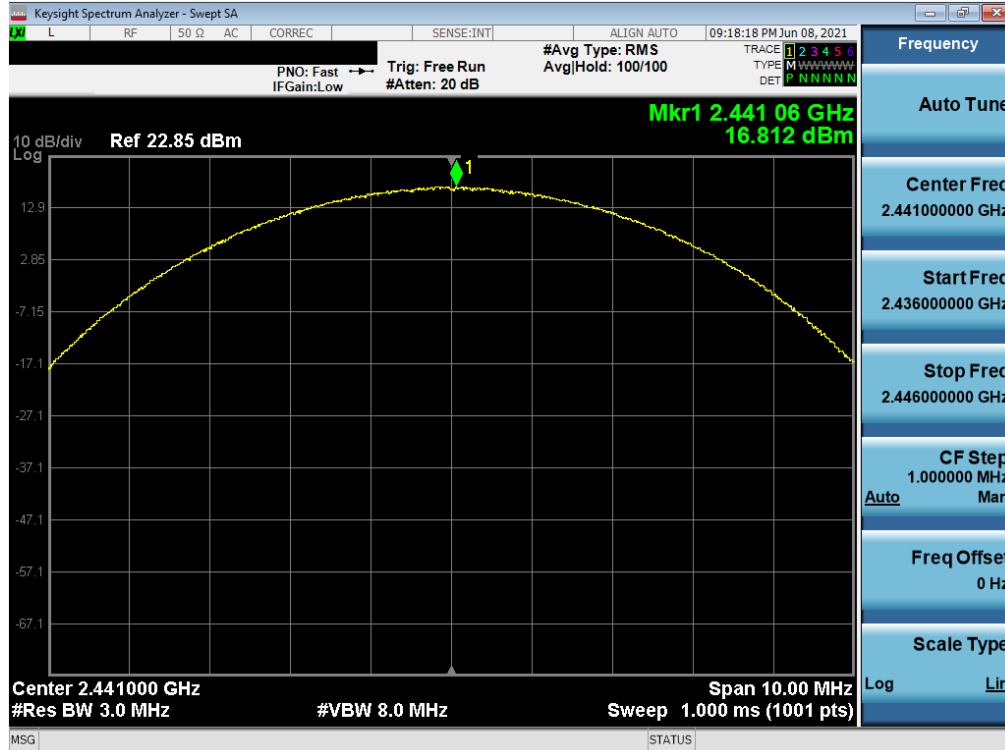


Plot 7-35. Peak Conducted Power (3Mbps – Ch. 39) Antenna 0 - iPA

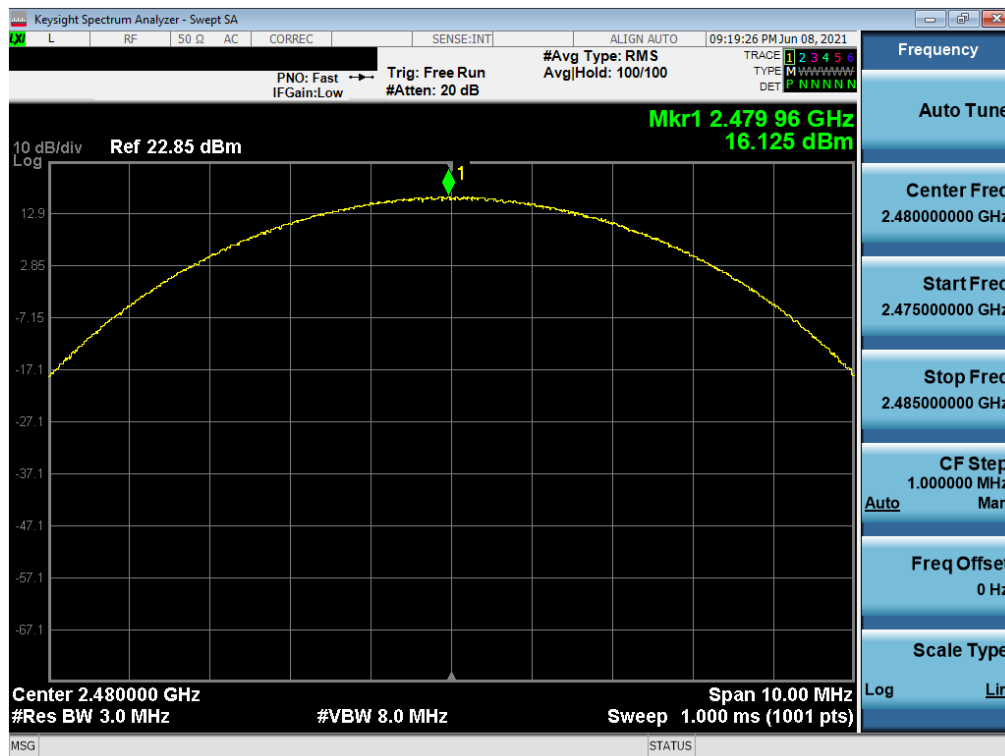


Plot 7-36. Peak Conducted Power (3Mbps – Ch. 78) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 33 of 95

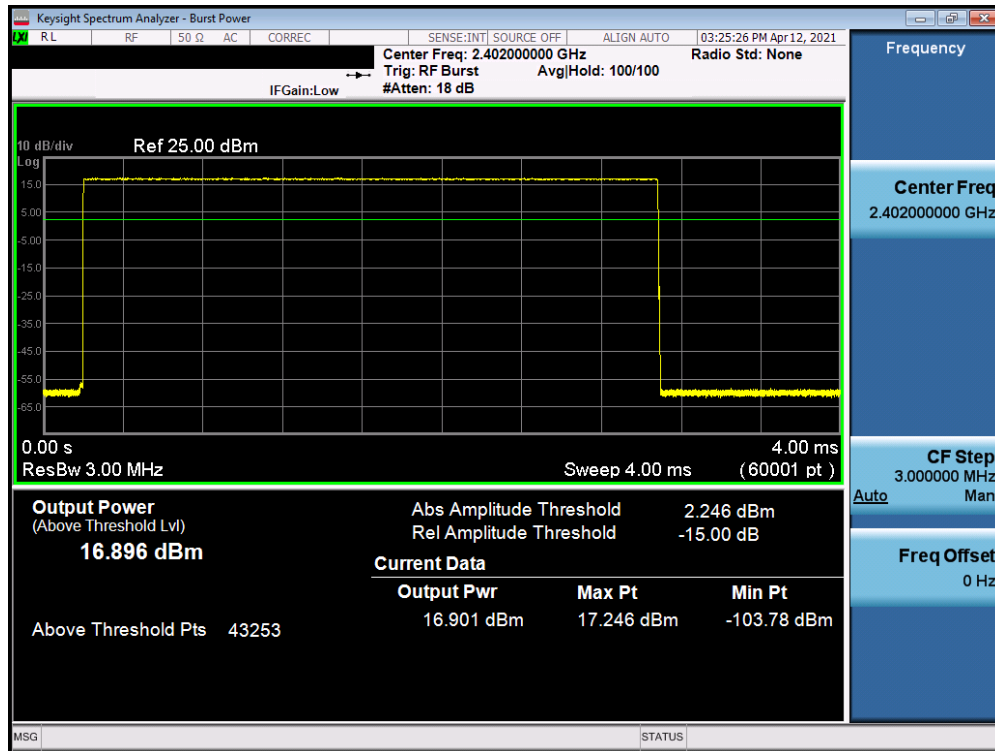


Plot 7-37. Average Conducted Power (1Mbps – Ch. 0) Antenna 0 - ePA

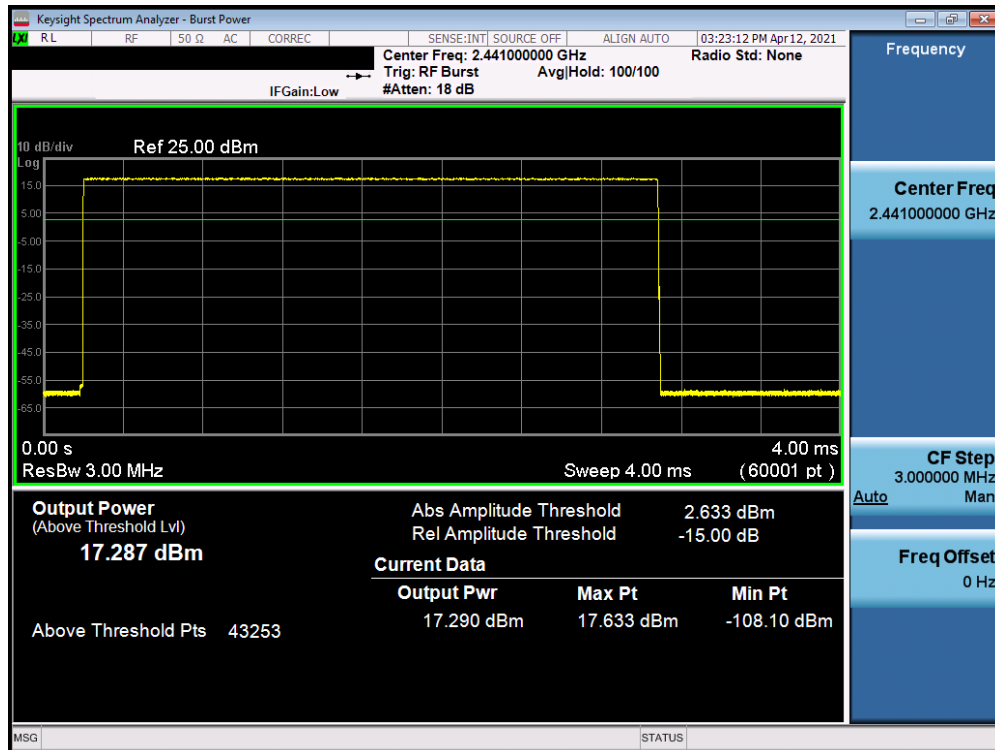


Plot 7-38. Average Conducted Power (1Mbps – Ch. 39) Antenna 0 - ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 34 of 95

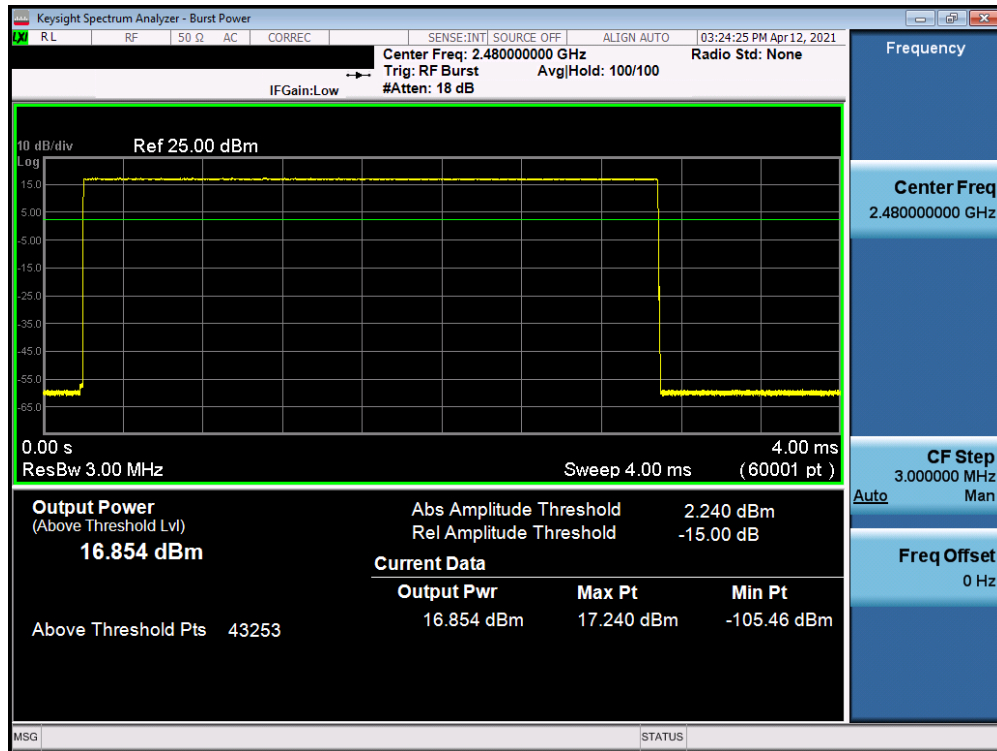


Plot 7-39. Average Conducted Power (1Mbps - Ch. 78) Antenna 0 - ePA

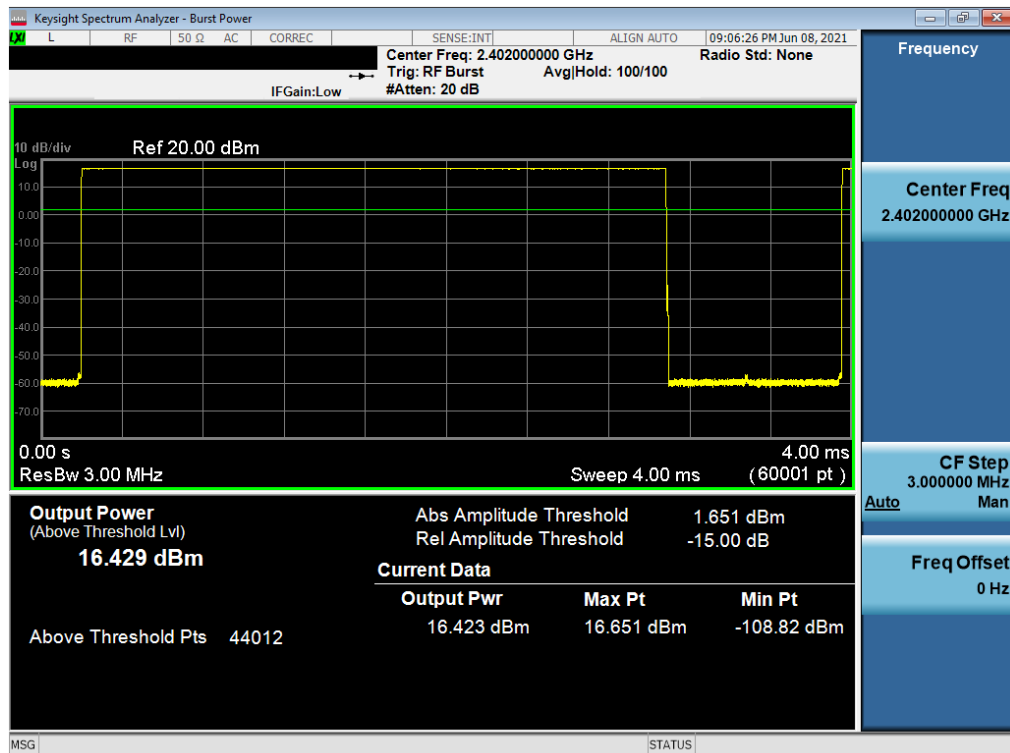


Plot 7-40. Average Conducted Power (1Mbps - Ch. 0) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 35 of 95

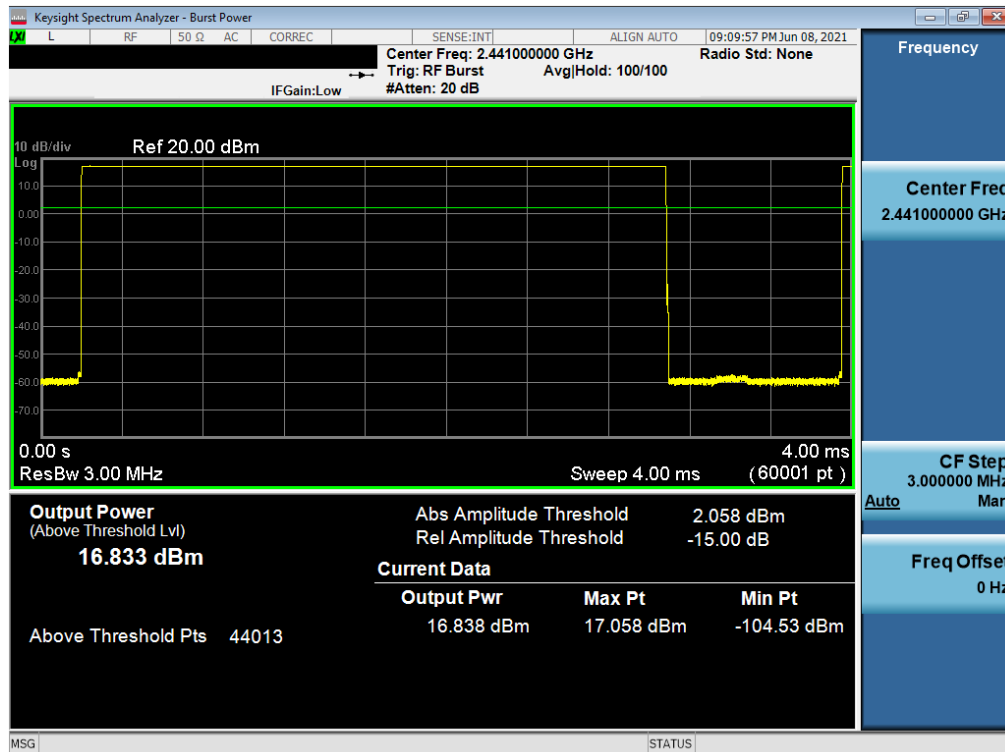


Plot 7-41. Average Conducted Power (1Mbps – Ch. 39) Antenna 0 - iPA

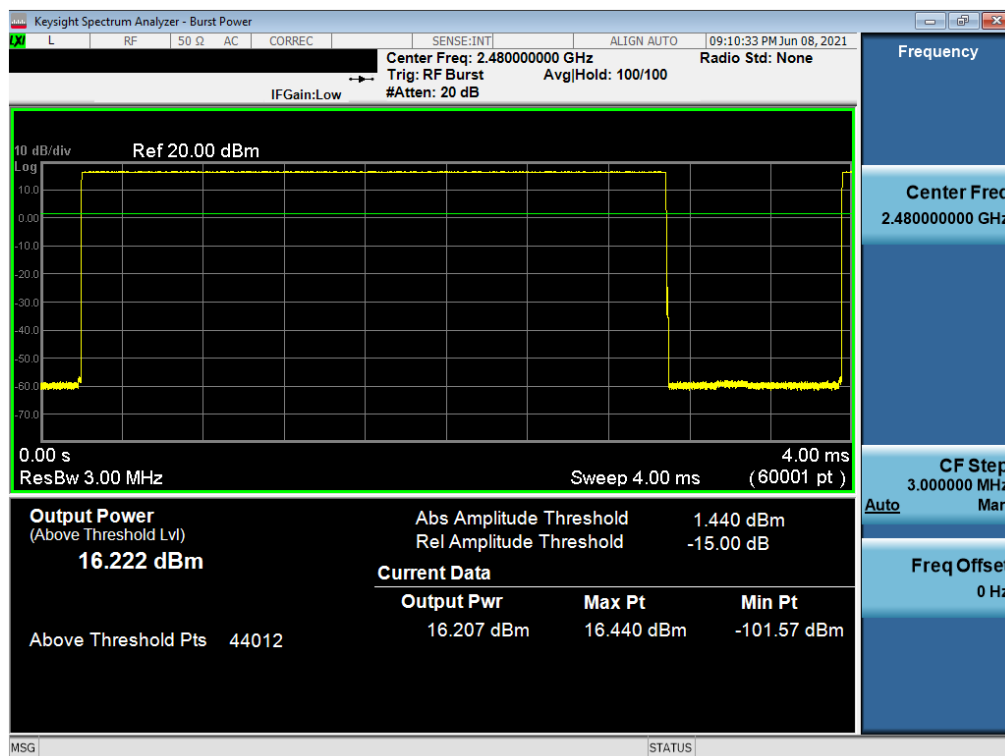


Plot 7-42. Average Conducted Power (1Mbps – Ch. 78) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 36 of 95

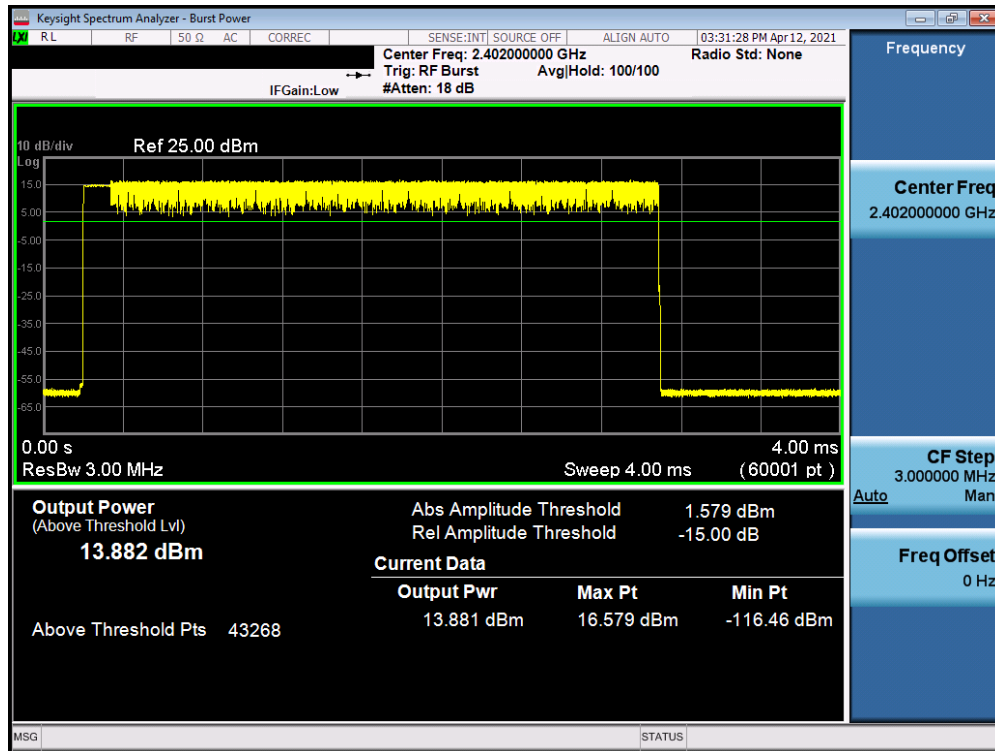


Plot 7-43. Average Conducted Power (2Mbps – Ch. 0) Antenna 0 - ePA

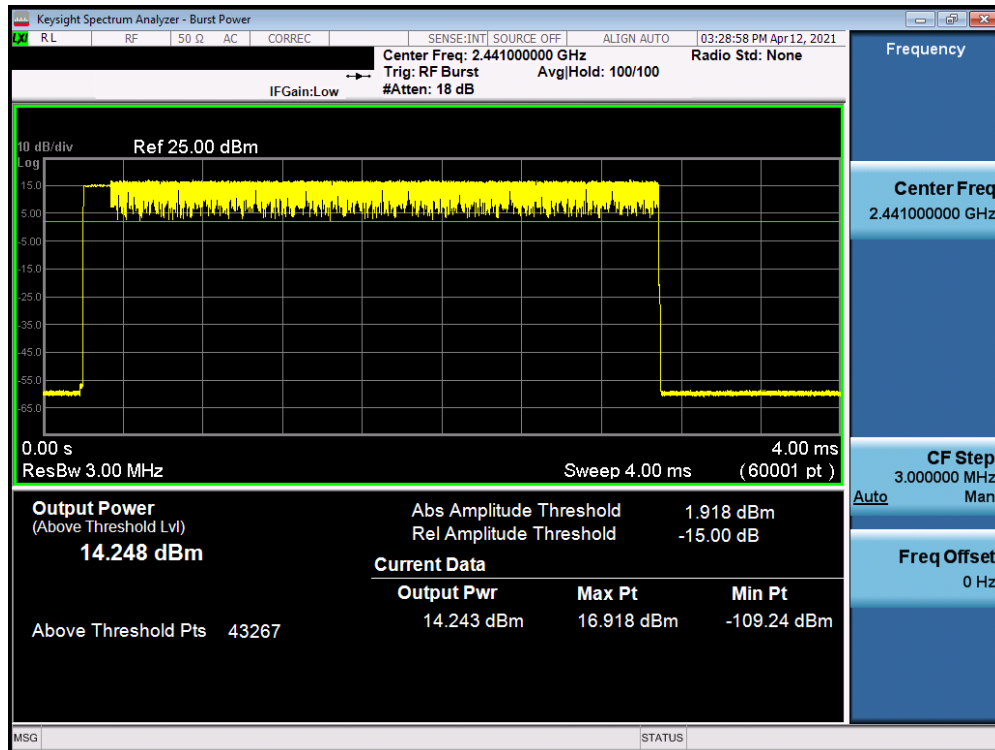


Plot 7-44. Average Conducted Power (2Mbps – Ch. 39) Antenna 0 - ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 37 of 95

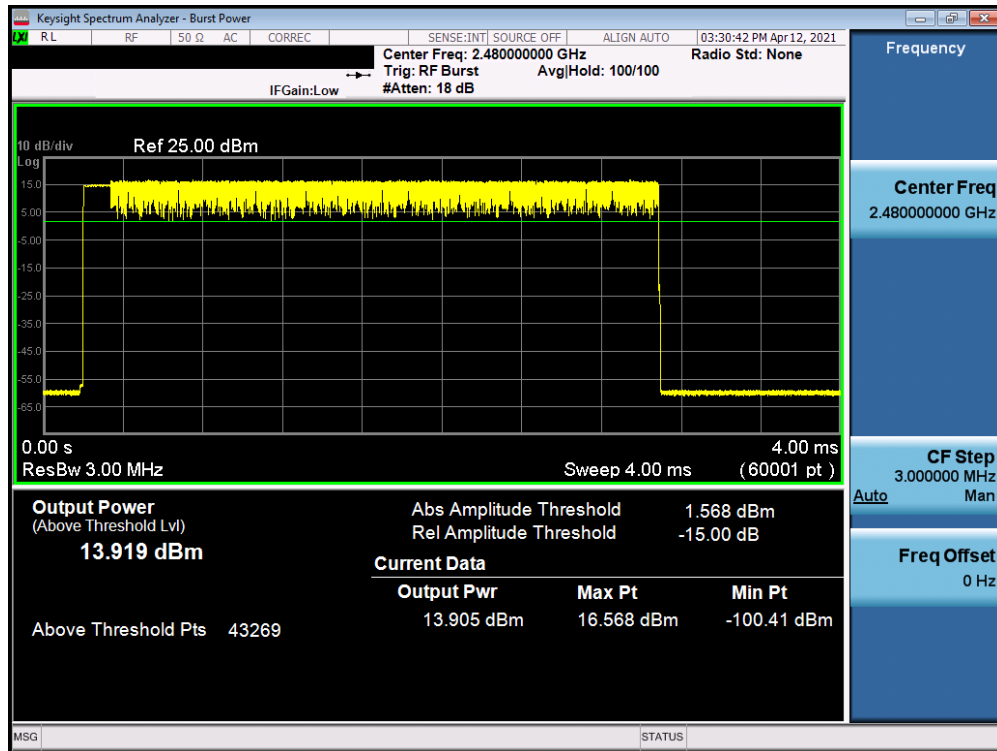


Plot 7-45. Average Conducted Power (2Mbps – Ch. 78) Antenna 0 – ePA

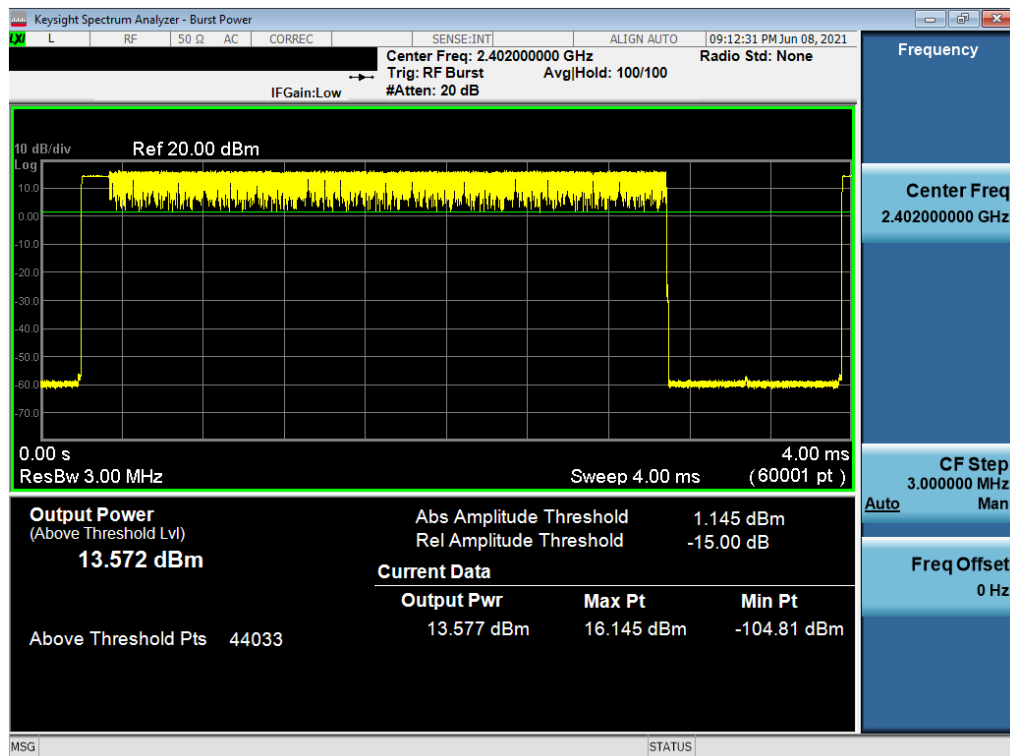


Plot 7-46. Average Conducted Power (2Mbps – Ch. 0) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 38 of 95

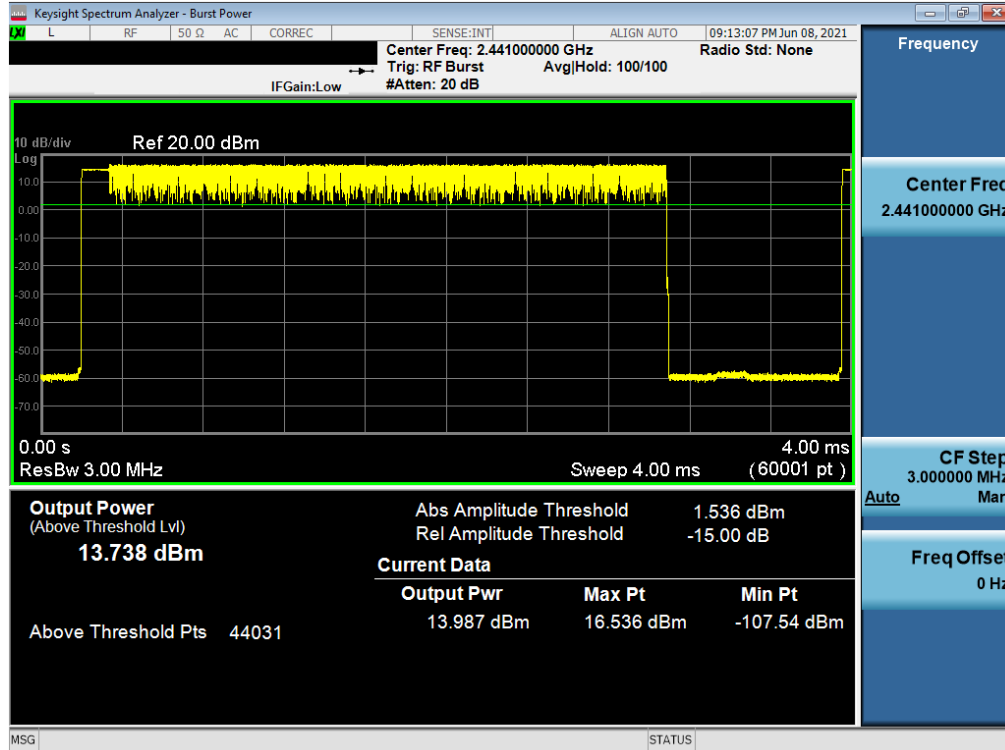


Plot 7-47. Average Conducted Power (2Mbps – Ch. 39) Antenna 0 - iPA

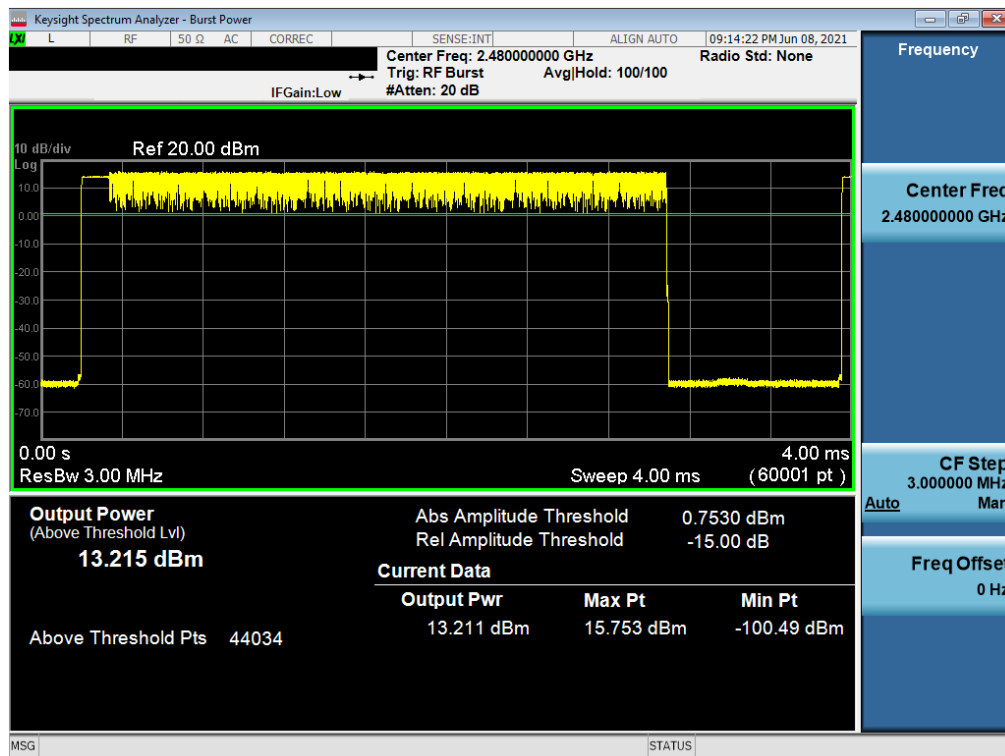


Plot 7-48. Average Conducted Power (2Mbps – Ch. 78) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 39 of 95

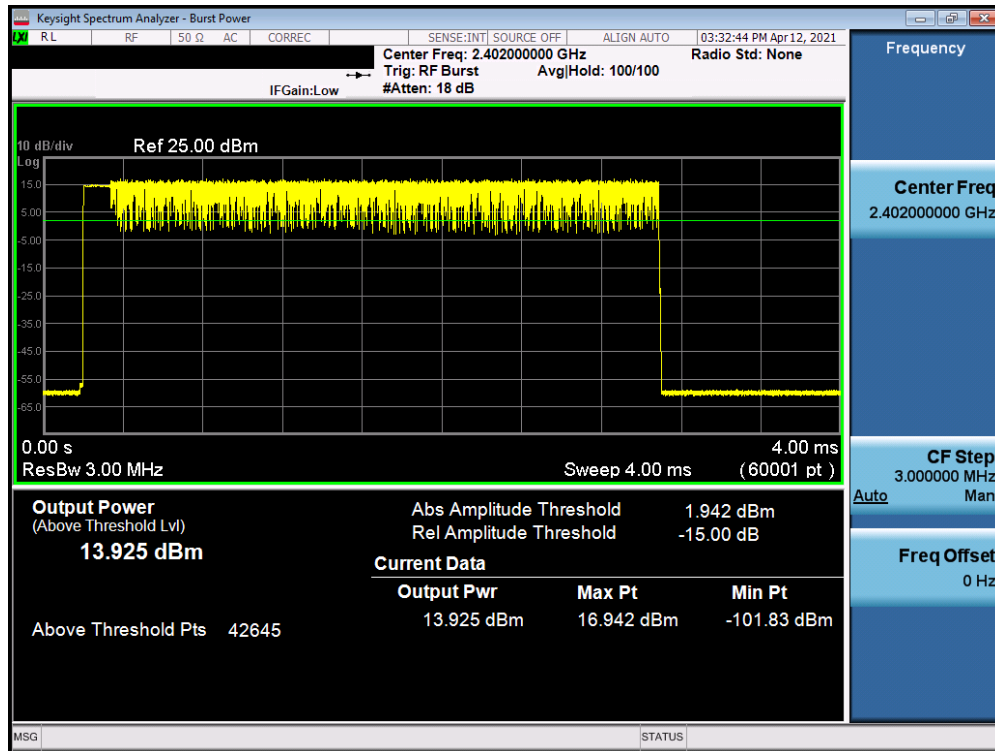


Plot 7-49. Average Conducted Power (3Mbps – Ch. 0) Antenna 0 - ePA

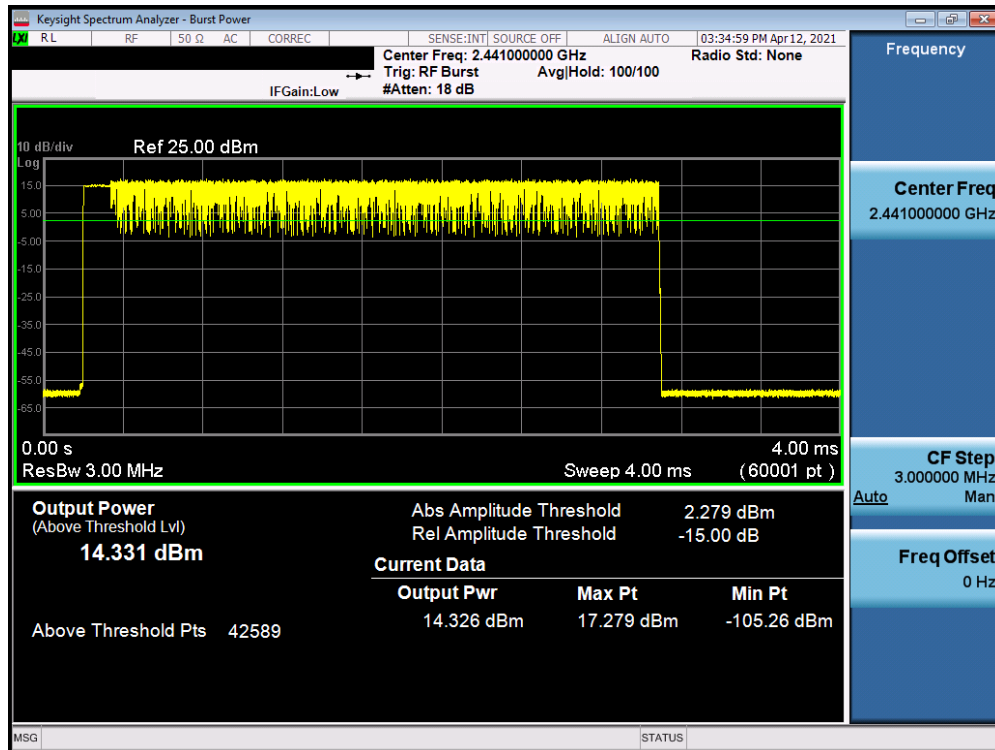


Plot 7-50. Average Conducted Power (3Mbps – Ch. 39) Antenna 0 - ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 40 of 95

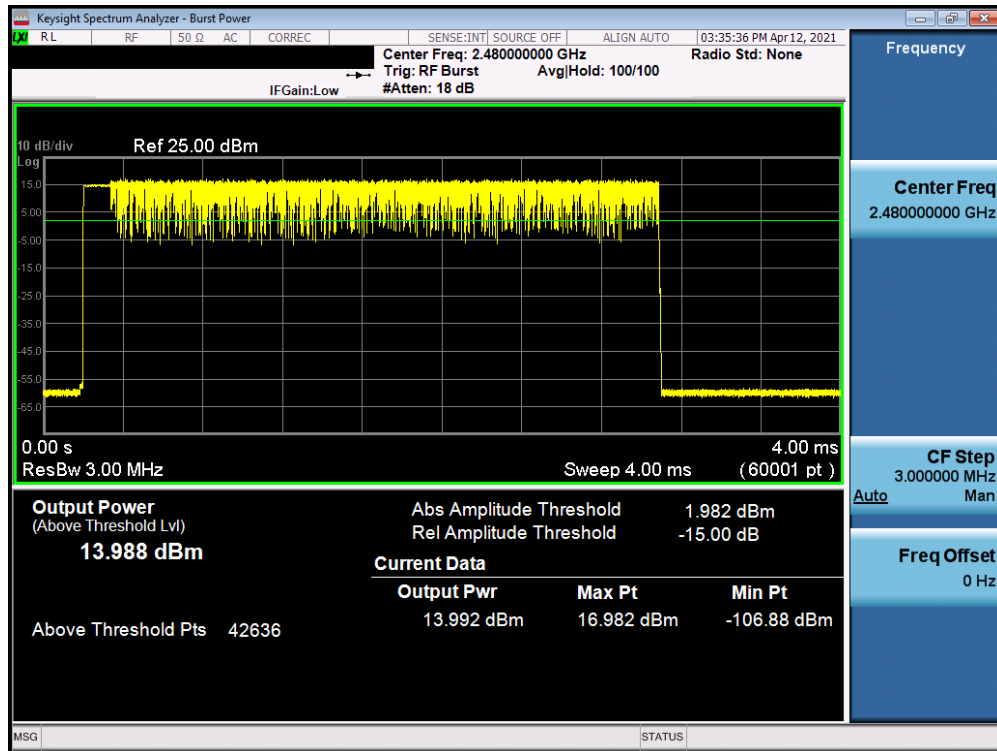


Plot 7-51. Average Conducted Power (3Mbps – Ch. 78) Antenna 0 – ePA

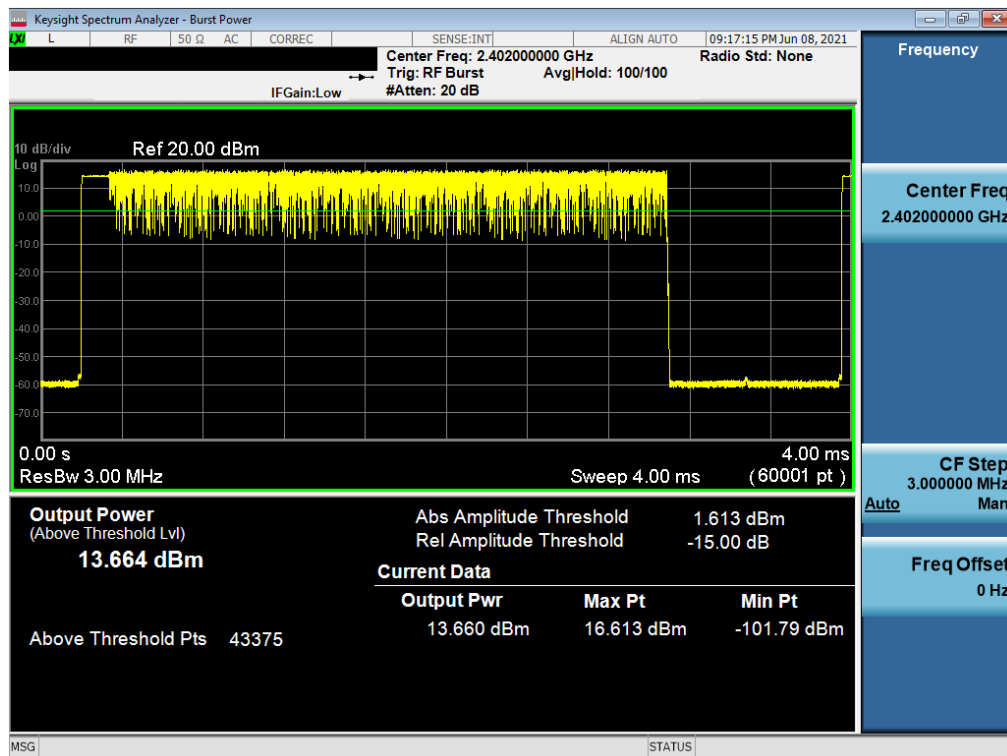


Plot 7-52. Average Conducted Power (3Mbps – Ch. 0) Antenna 0 - iPA

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 41 of 95

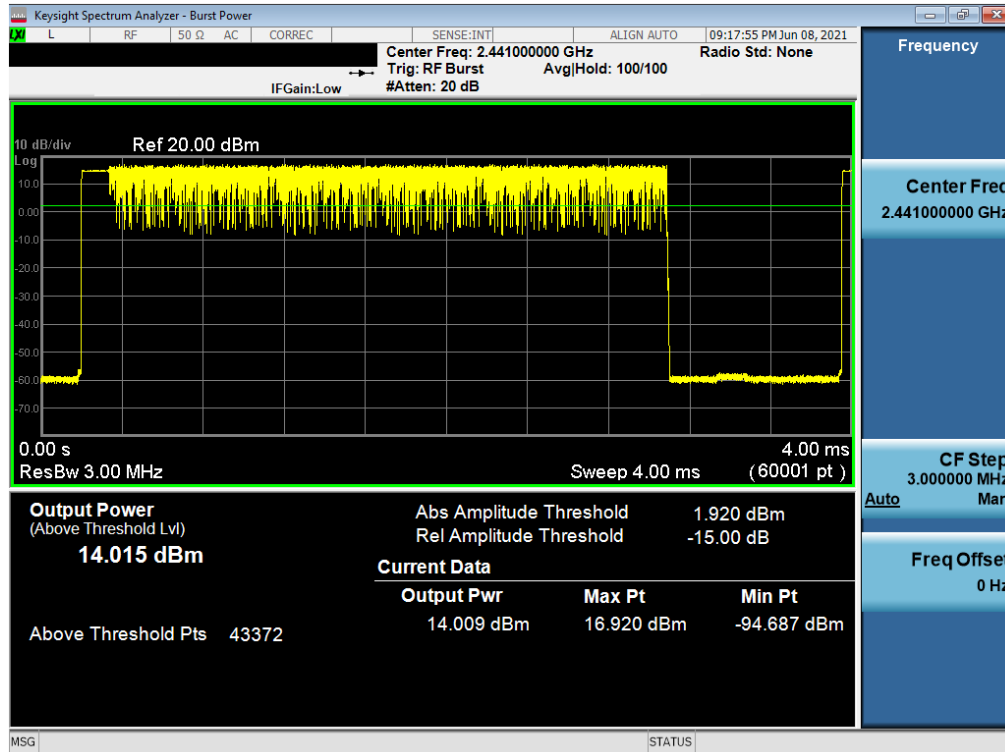

Plot 7-53. Average Conducted Power (3Mbps – Ch. 39) Antenna 0 - iPA

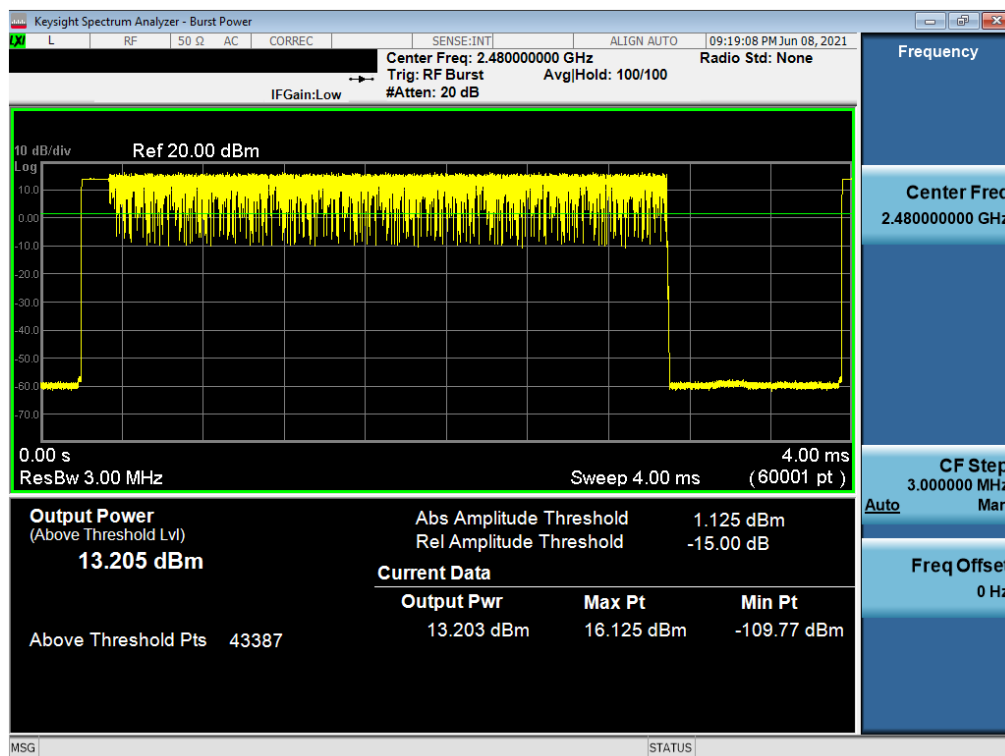


Plot 7-54. Average Conducted Power (3Mbps – Ch. 78) Antenna 0 - iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 42 of 95


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Avg Conducted Power		Ant. Gain [dBi]	EIRP	Limit	Margin
					[dBm]	[mW]	[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	16.85	48.417	16.71	46.881	-2.55	14.30	36.02	-21.72
2441	1.0	GFSK	ePA	39	17.15	51.880	16.93	49.317	-1.61	15.54	36.02	-20.48
2480	1.0	GFSK	ePA	78	15.94	39.264	15.52	35.645	-1.71	14.23	36.02	-21.79
2402	1.0	GFSK	iPA	0	15.96	39.446	15.53	35.727	-2.55	13.41	36.02	-22.61
2441	1.0	GFSK	iPA	39	16.73	47.098	16.52	44.875	-1.61	15.12	36.02	-20.90
2480	1.0	GFSK	iPA	78	14.37	27.353	14.08	25.586	-1.71	12.66	36.02	-23.36
2402	2.0	$\pi/4$ -DQPSK	ePA	0	16.12	40.926	13.38	21.777	-2.55	13.57	36.02	-22.45
2441	2.0	$\pi/4$ -DQPSK	ePA	39	16.52	44.875	13.93	24.717	-1.61	14.91	36.02	-21.11
2480	2.0	$\pi/4$ -DQPSK	ePA	78	15.42	34.834	12.45	17.579	-1.71	13.71	36.02	-22.31
2402	2.0	$\pi/4$ -DQPSK	iPA	0	15.16	32.810	12.64	18.365	-2.55	12.61	36.02	-23.41
2441	2.0	$\pi/4$ -DQPSK	iPA	39	16.14	41.115	13.65	23.174	-1.61	14.53	36.02	-21.49
2480	2.0	$\pi/4$ -DQPSK	iPA	78	13.82	24.099	11.25	13.335	-1.71	12.11	36.02	-23.91
2402	3.0	8DPSK	ePA	0	16.66	46.345	13.30	21.380	-2.55	14.11	36.02	-21.91
2441	3.0	8DPSK	ePA	39	15.52	35.604	13.83	24.155	-1.61	13.91	36.02	-22.12
2480	3.0	8DPSK	ePA	78	15.88	38.726	12.59	18.155	-1.71	14.17	36.02	-21.85
2402	3.0	8DPSK	iPA	0	15.71	37.239	12.65	18.408	-2.55	13.16	36.02	-22.86
2441	3.0	8DPSK	iPA	39	16.68	46.559	13.75	23.714	-1.61	15.07	36.02	-20.95
2480	3.0	8DPSK	iPA	78	14.30	26.897	11.33	13.583	-1.71	12.59	36.02	-23.43

Table 7-5. Conducted Output Power Measurements Antenna 1

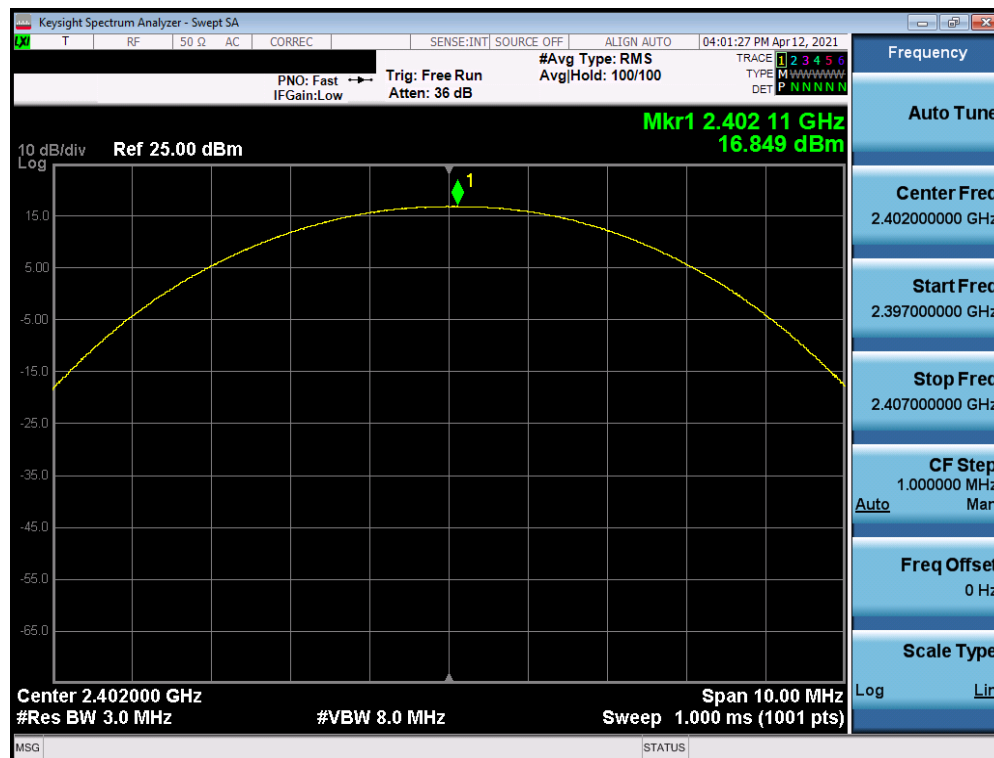


Plot 7-55. Peak Conducted Power (1Mbps – Ch. 0) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 43 of 95

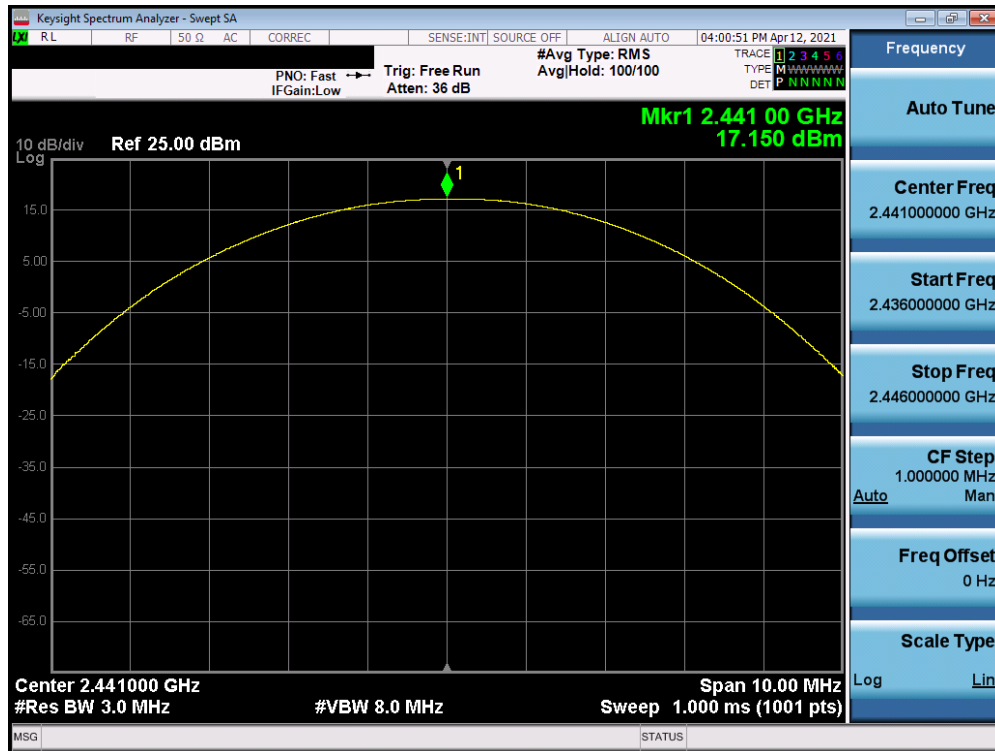


Plot 7-56. Peak Conducted Power (1Mbps – Ch. 39) Antenna 1 ePA

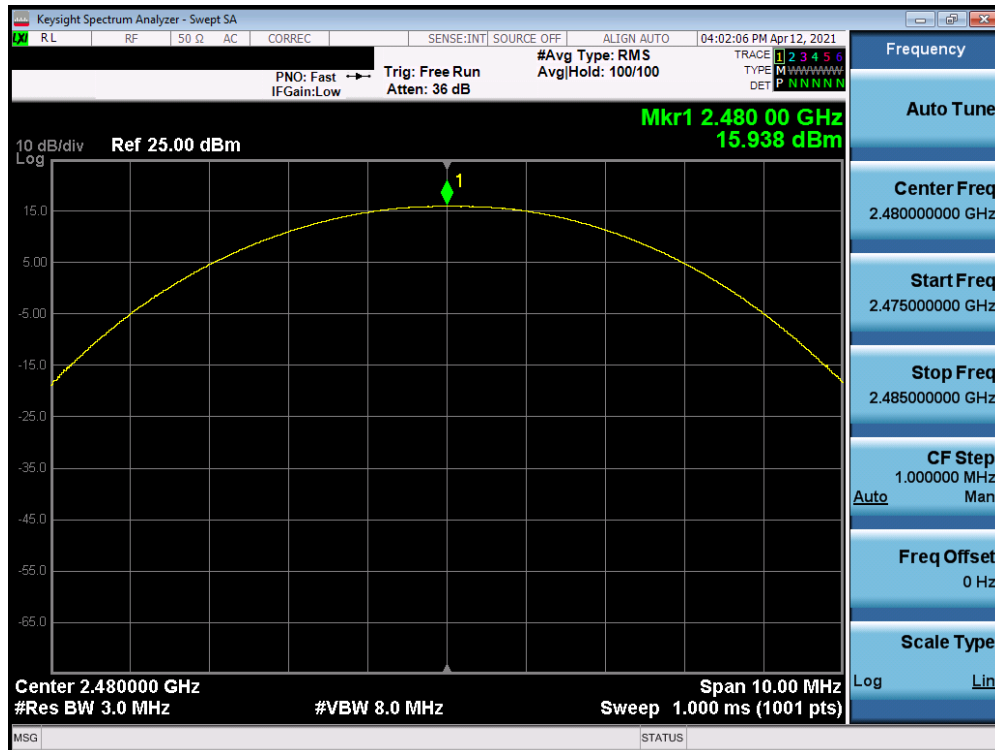


Plot 7-57. Peak Conducted Power (1Mbps – Ch. 78) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 44 of 95

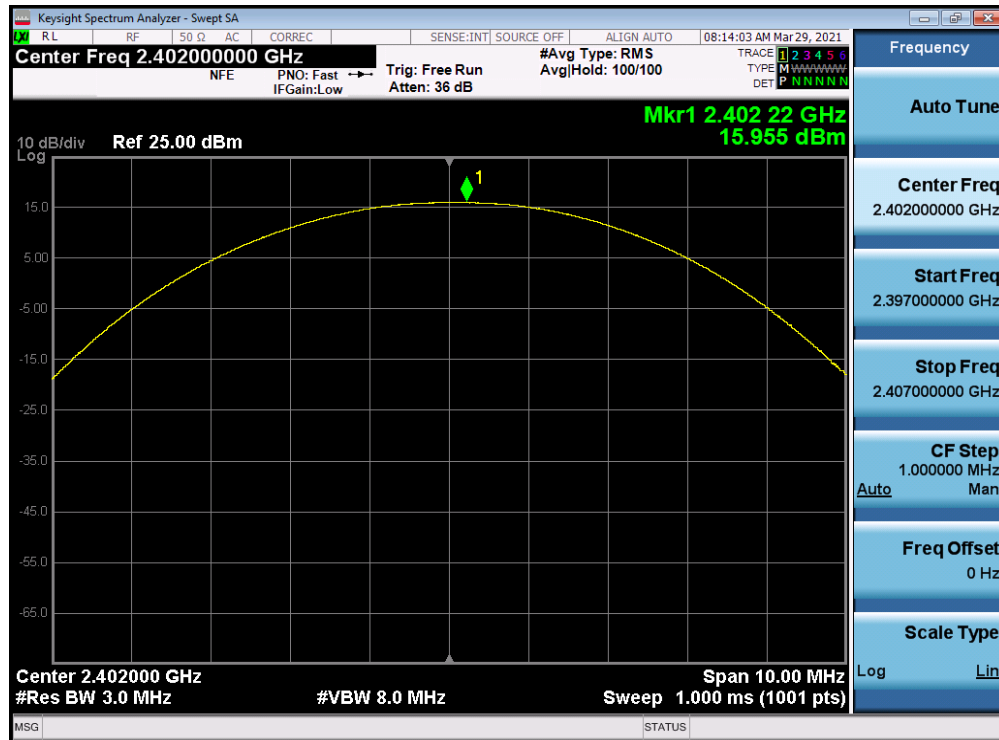


Plot 7-58. Peak Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

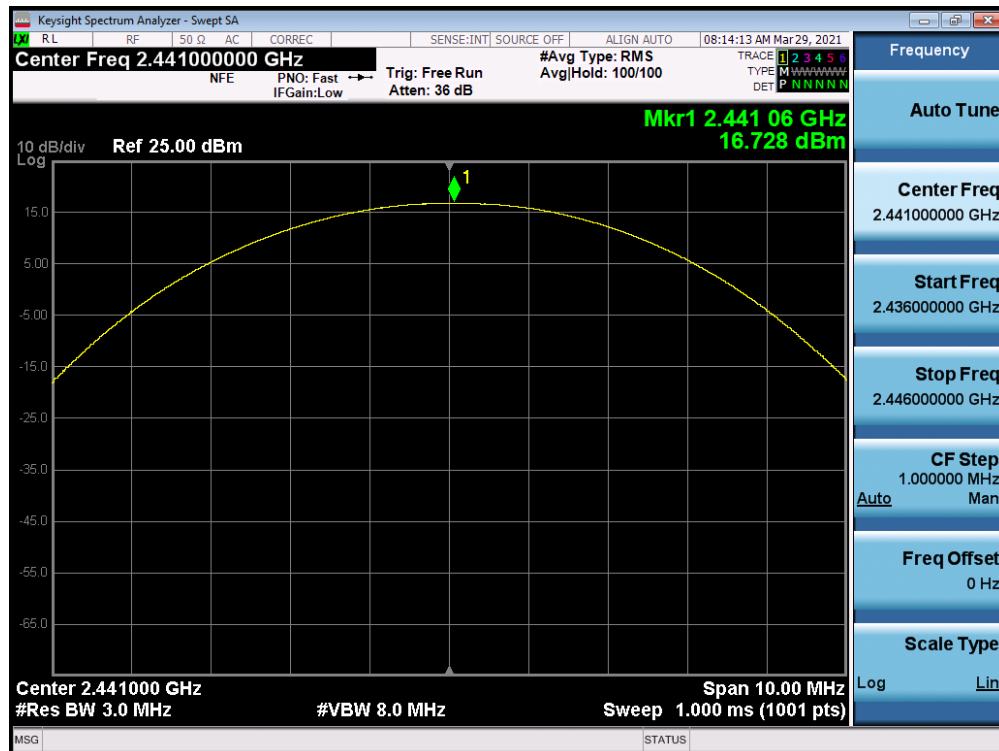


Plot 7-59. Peak Conducted Power (2Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 45 of 95

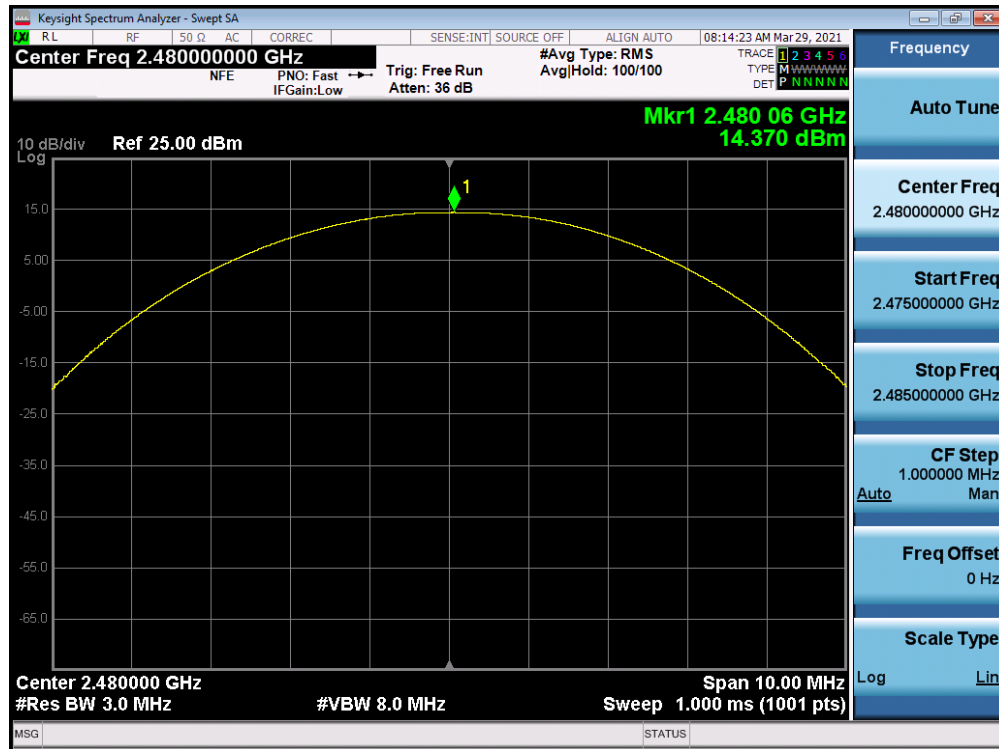


Plot 7-60. Peak Conducted Power (2Mbps – Ch. 78) Antenna 1 iPA

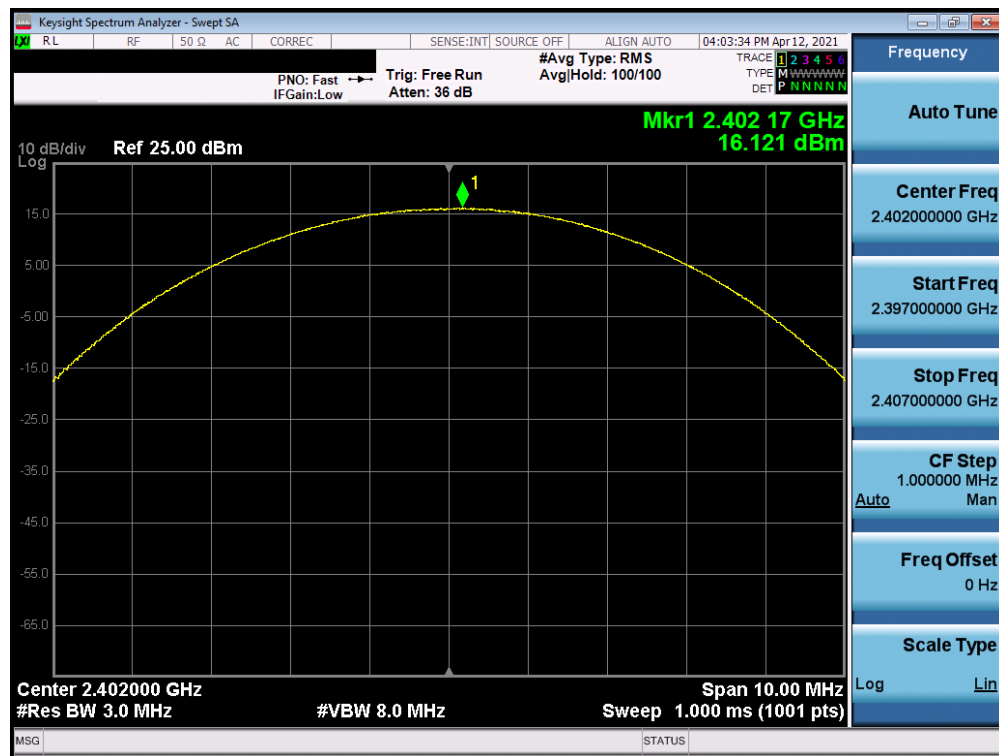


Plot 7-61. Peak Conducted Power (2Mbps – Ch. 0) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 46 of 95

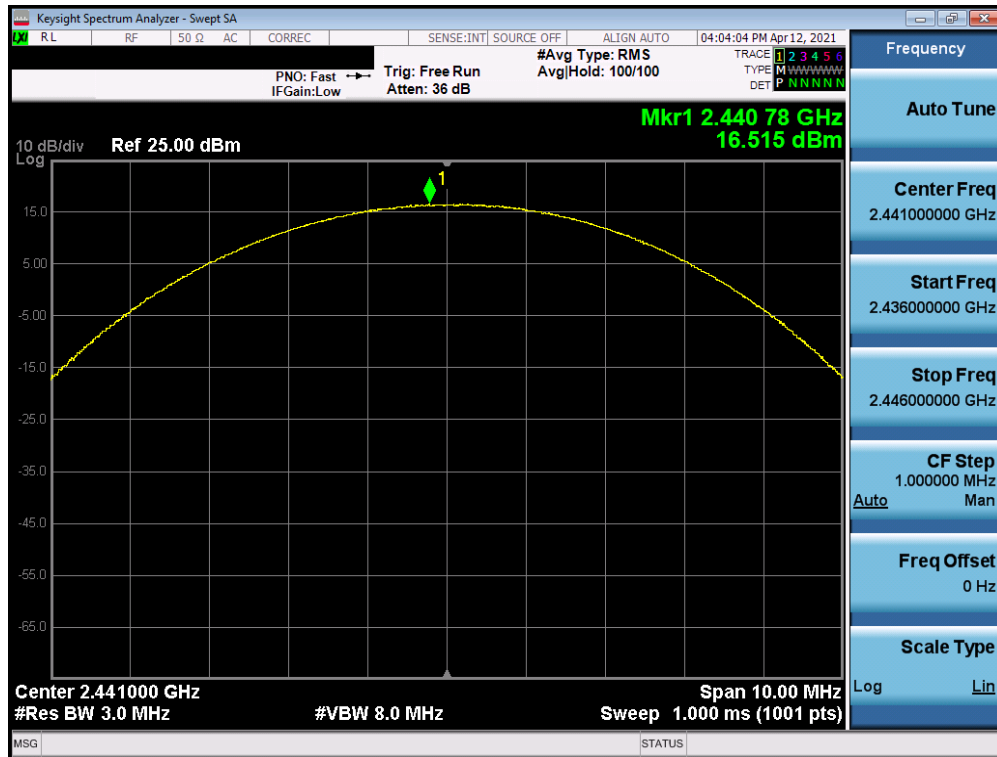


Plot 7-62. Peak Conducted Power (2Mbps – Ch. 39) Antenna 1 ePA

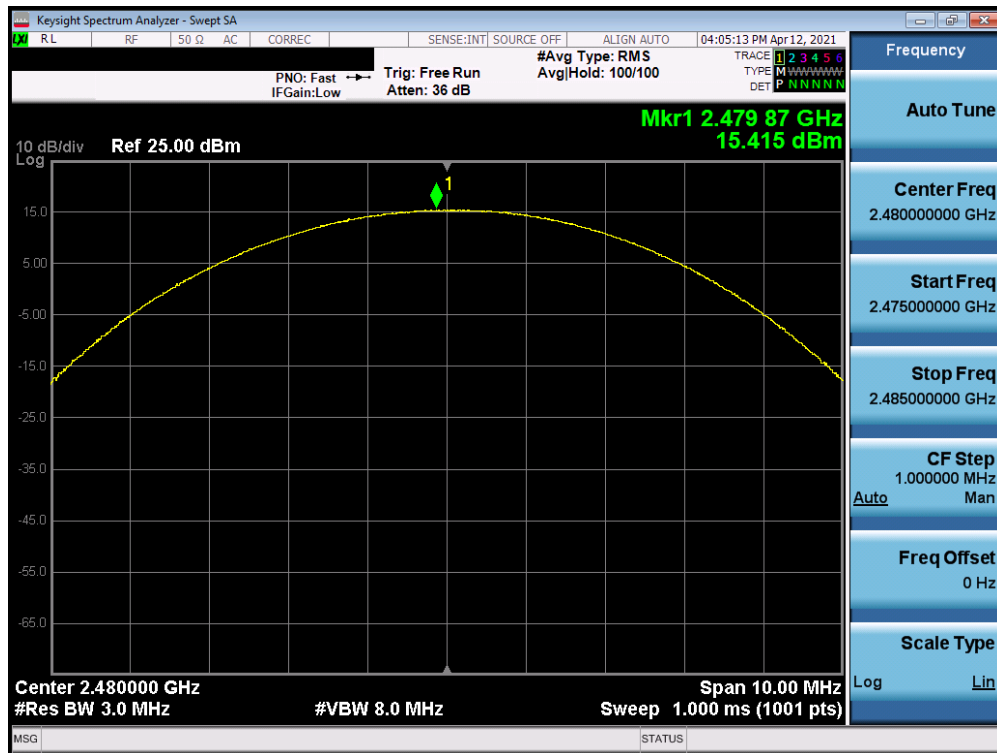


Plot 7-63. Peak Conducted Power (2Mbps – Ch. 78) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 47 of 95

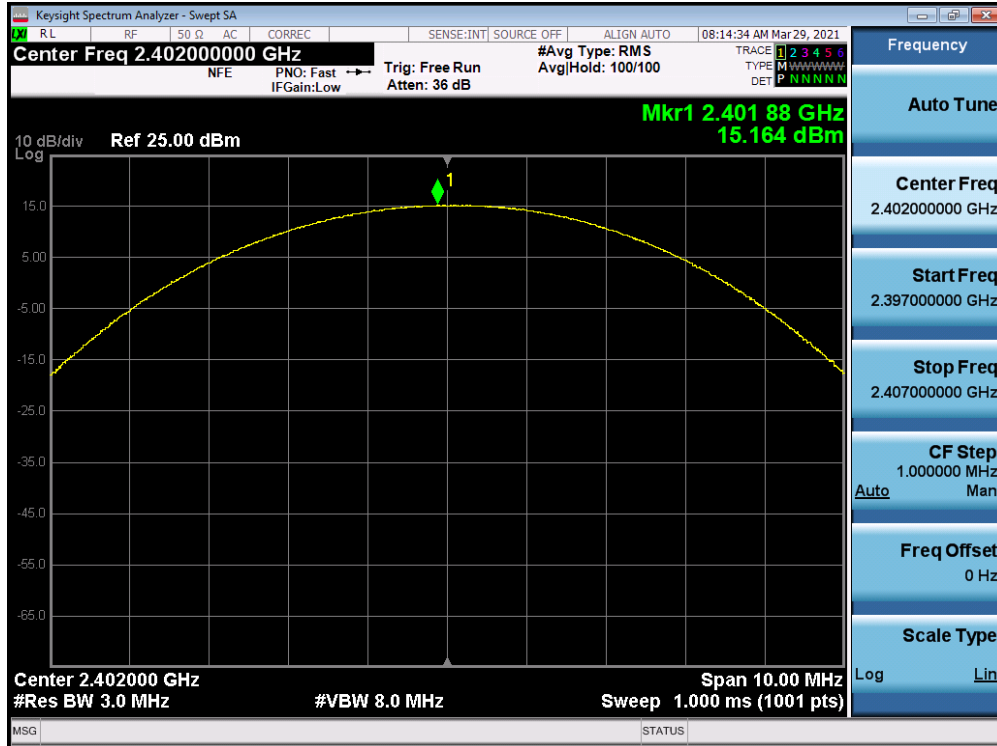


Plot 7-64. Peak Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

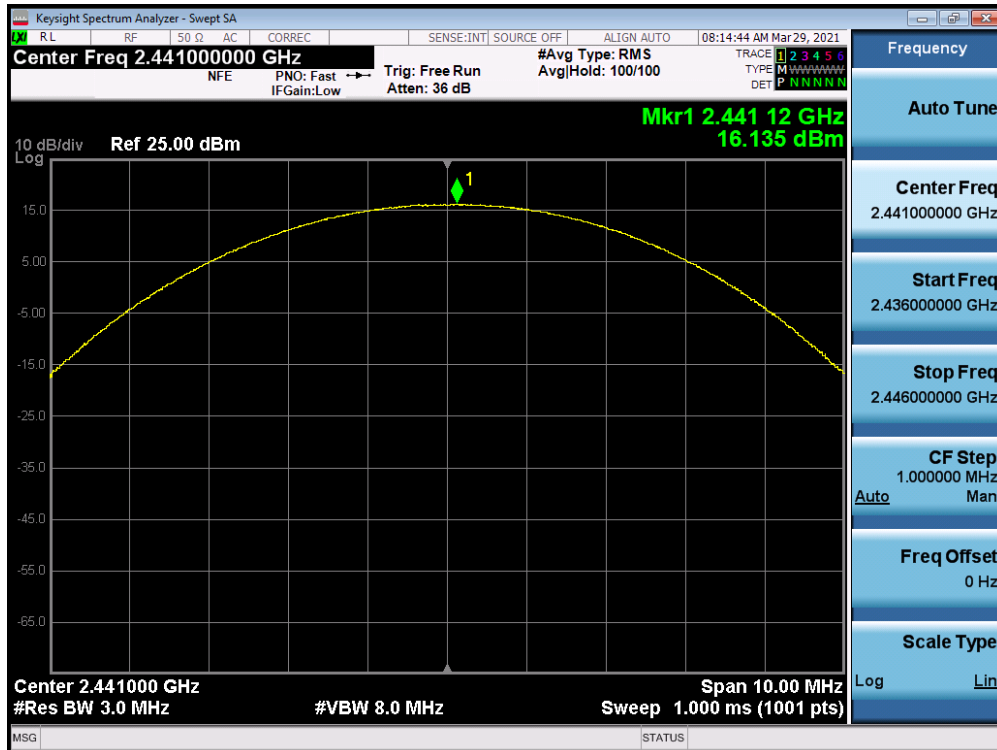


Plot 7-65. Peak Conducted Power (2Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 48 of 95

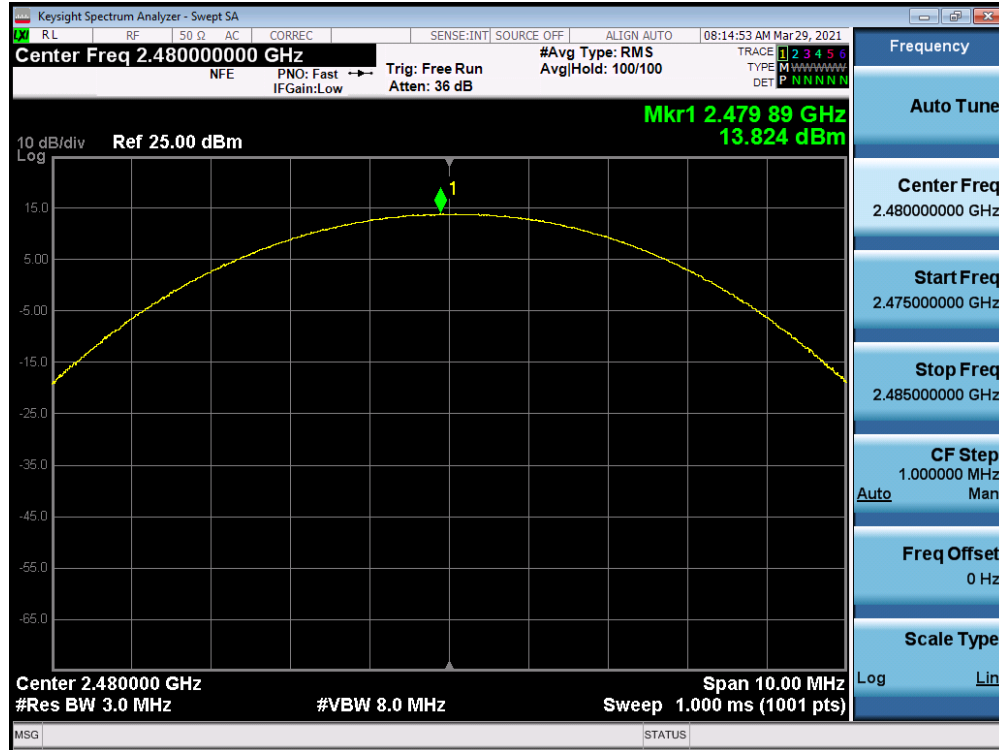


Plot 7-66. Peak Conducted Power (2Mbps – Ch. 78) Antenna 1 iPA

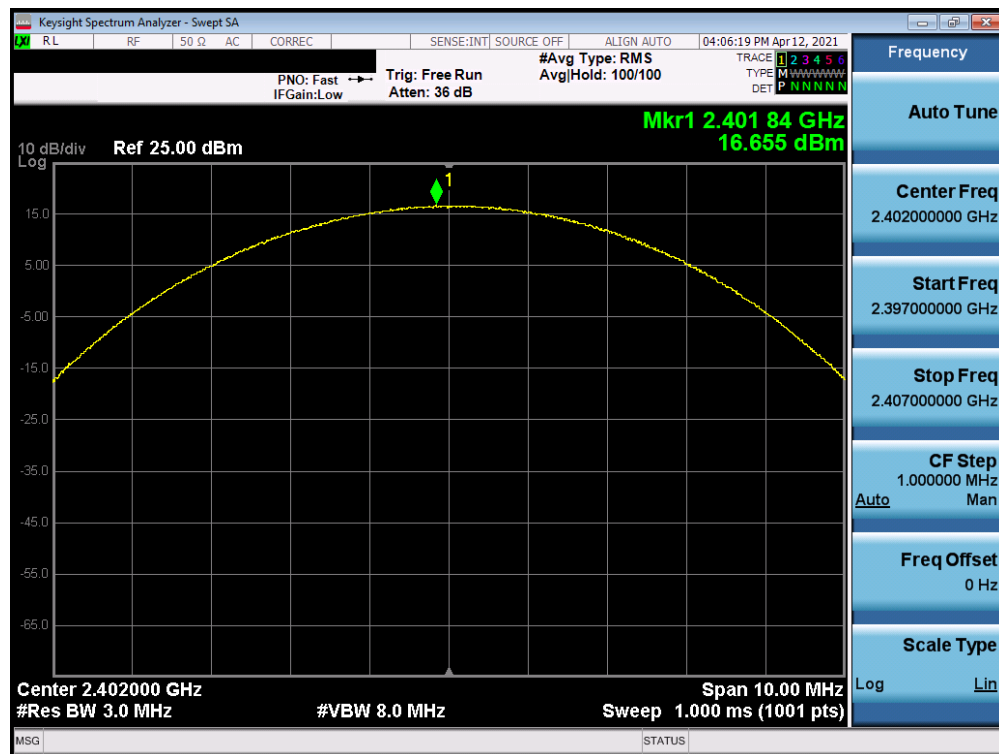


Plot 7-67. Peak Conducted Power (3Mbps – Ch. 0) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 49 of 95

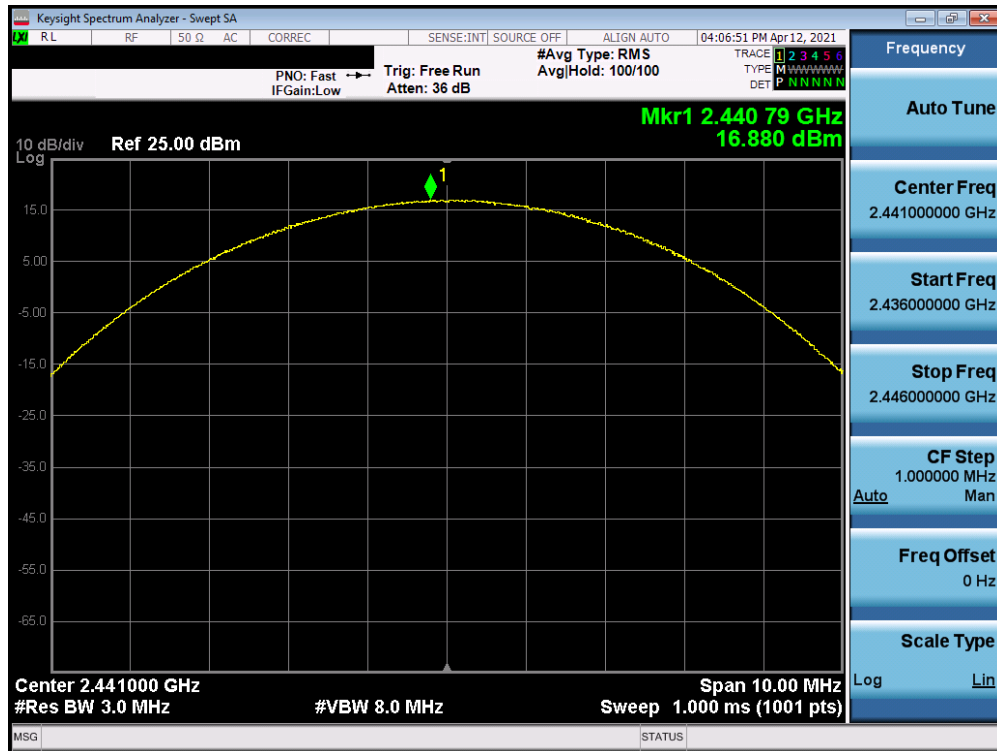


Plot 7-68. Peak Conducted Power (3Mbps – Ch. 39) Antenna 1 ePA

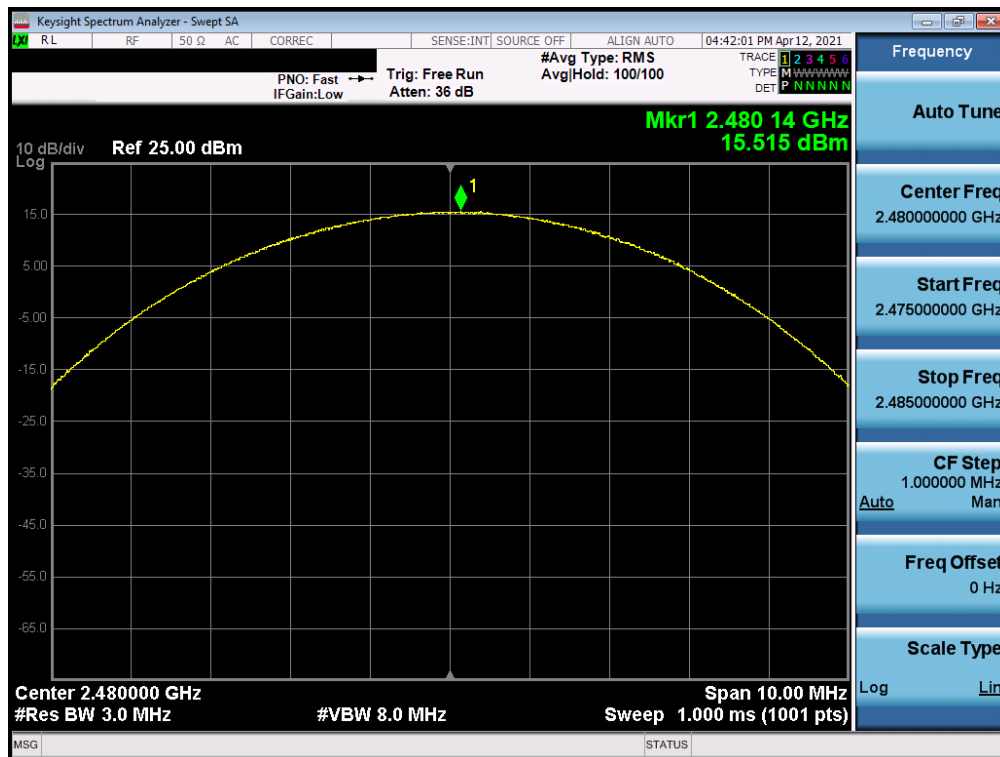


Plot 7-69. Peak Conducted Power (3Mbps – Ch. 78) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 50 of 95

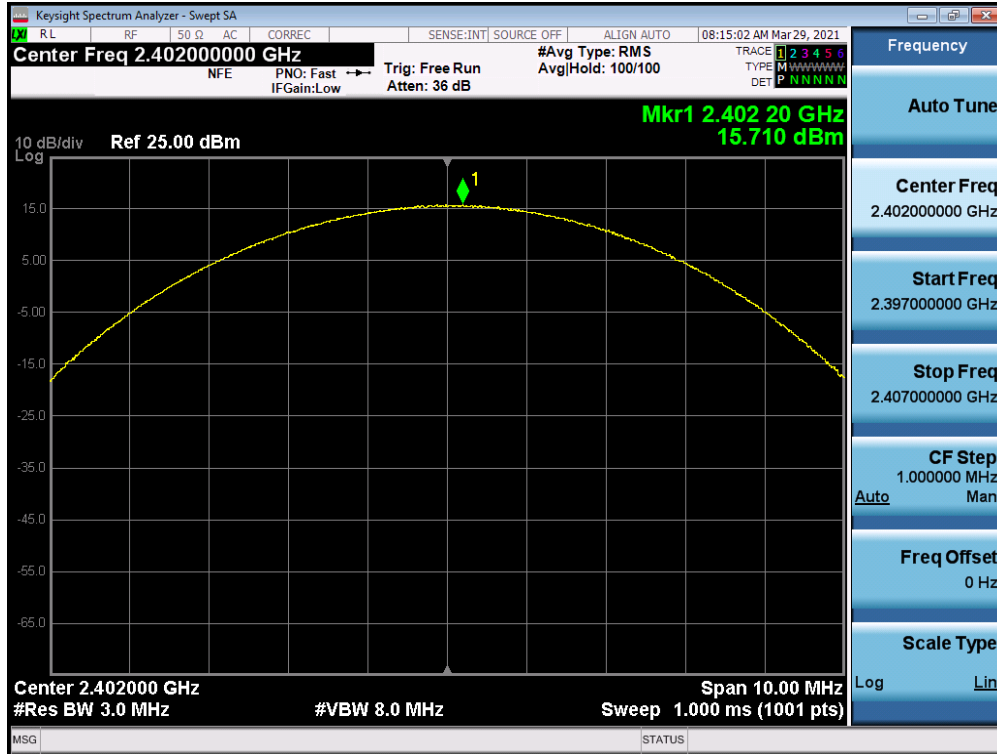


Plot 7-70. Peak Conducted Power (3Mbps – Ch. 0) Antenna 1 iPA

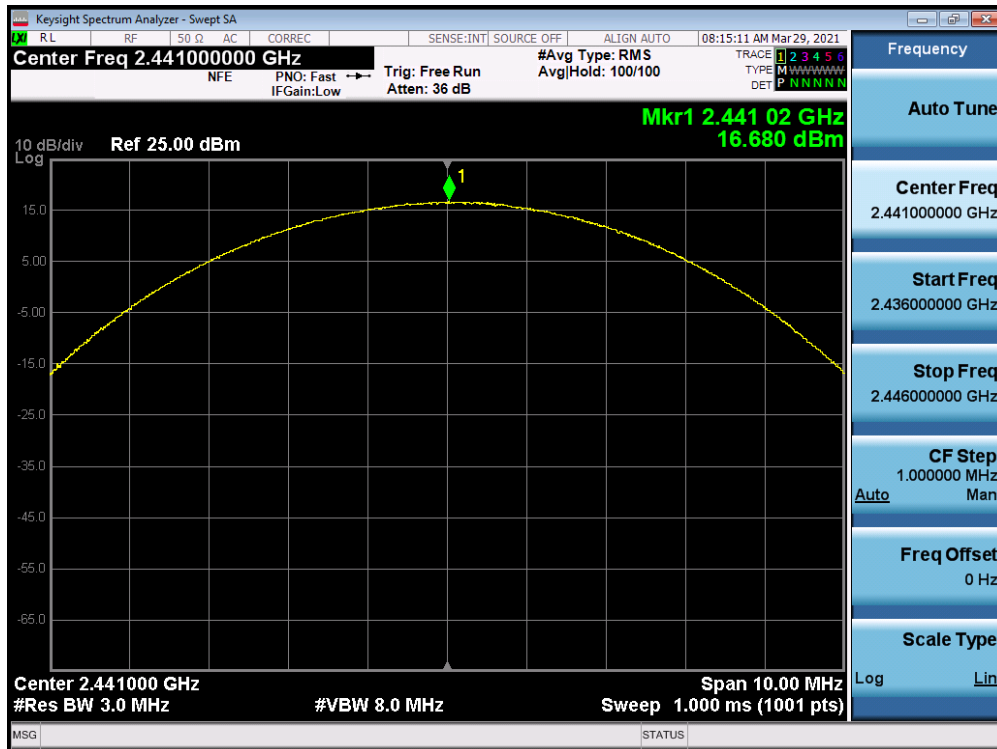


Plot 7-71. Peak Conducted Power (3Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 51 of 95

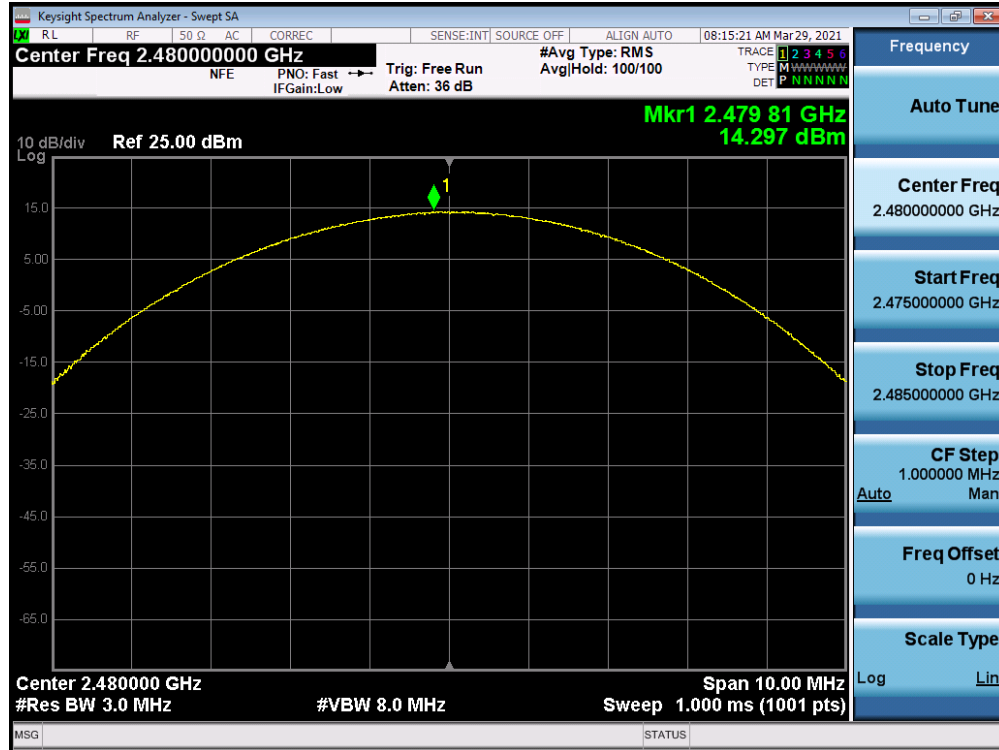


Plot 7-72. Peak Conducted Power (3Mbps – Ch. 78) Antenna 1 iPA

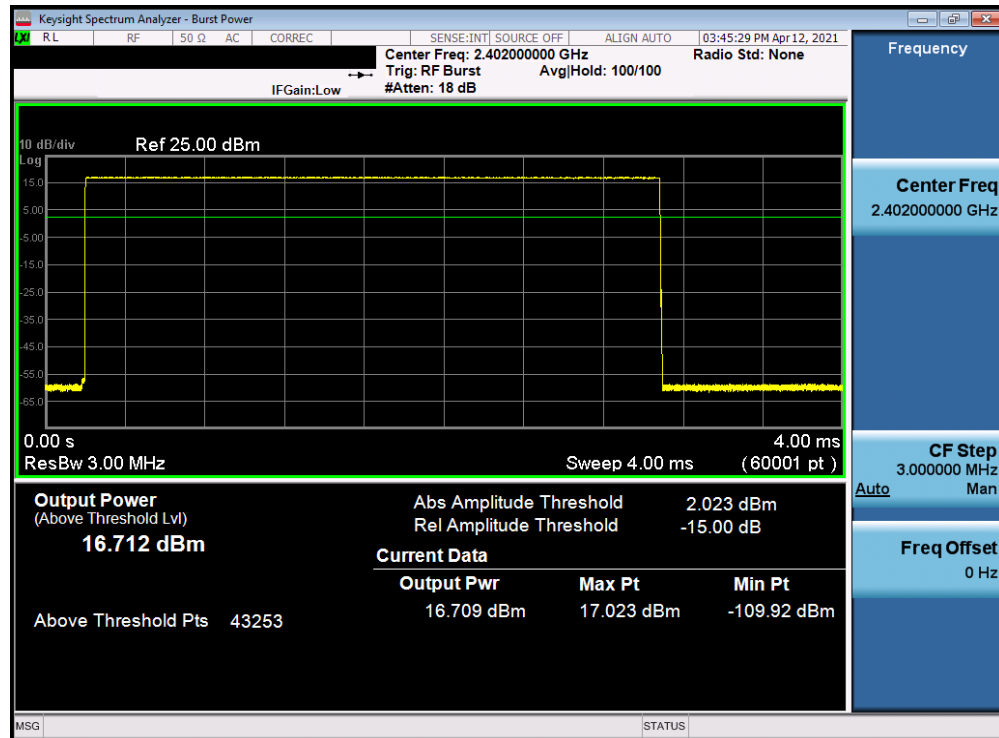


Plot 7-73. Average Conducted Power (1Mbps – Ch. 0) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 52 of 95

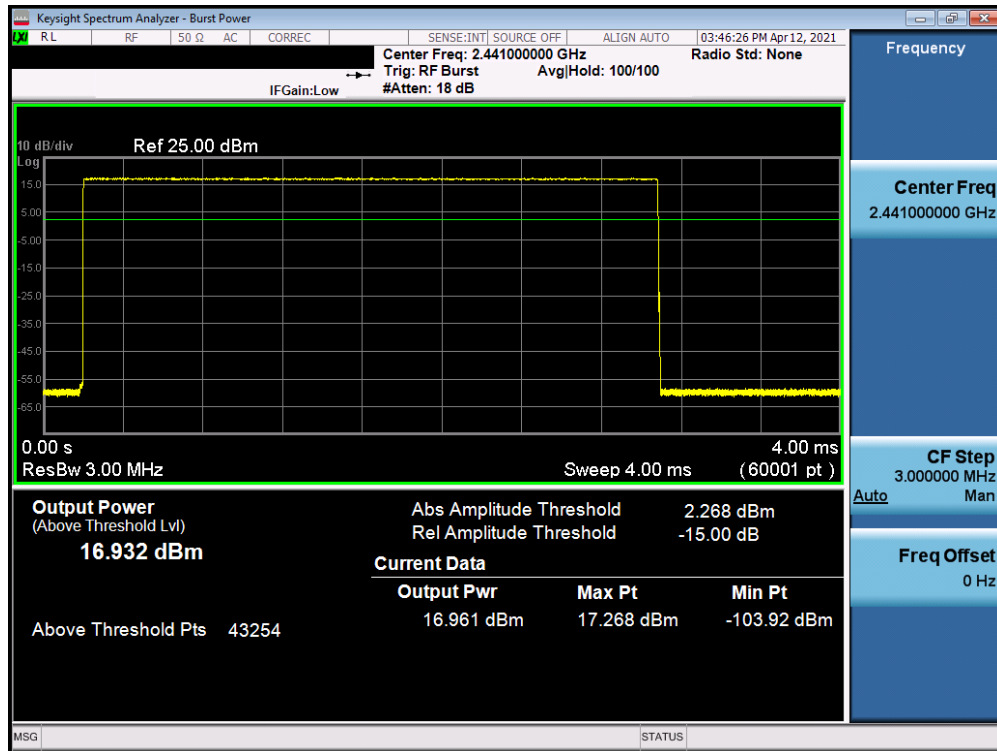


Plot 7-74. Average Conducted Power (1Mbps – Ch. 39) Antenna 1 ePA

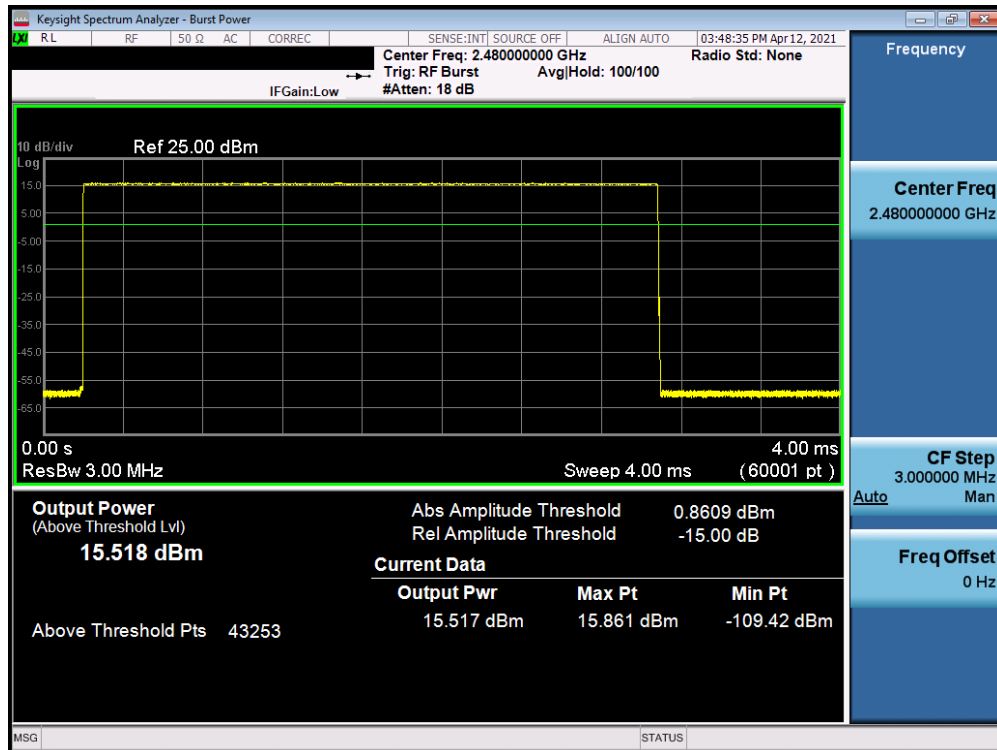


Plot 7-75. Average Conducted Power (1Mbps – Ch. 78) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 53 of 95

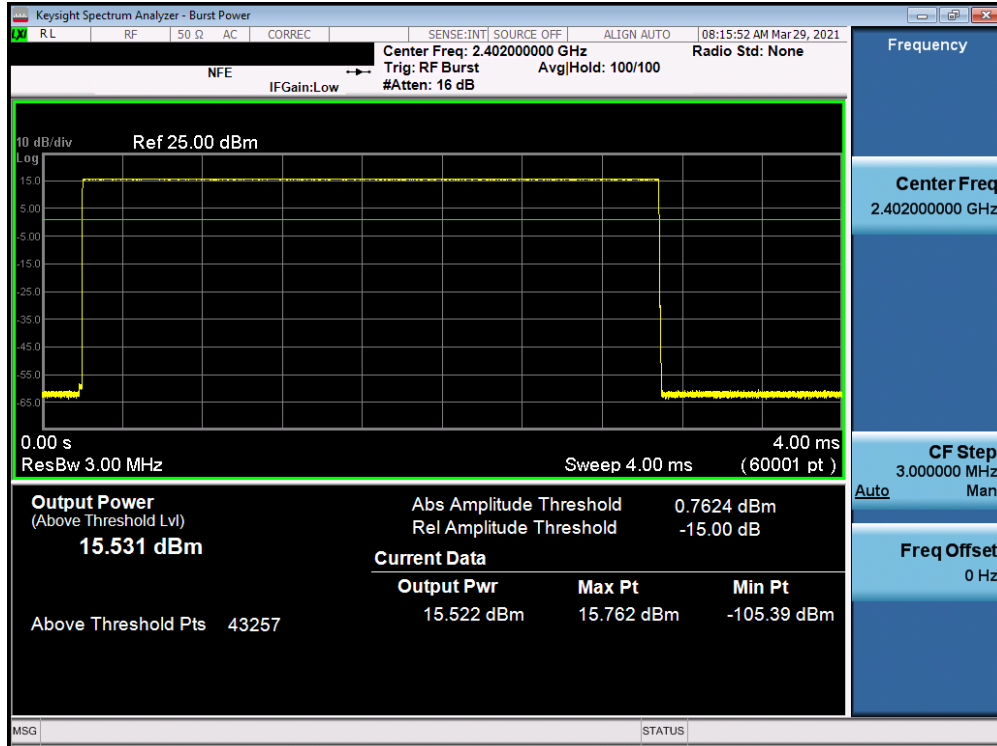


Plot 7-76. Average Conducted Power (1Mbps – Ch. 0) Antenna 1 iPA

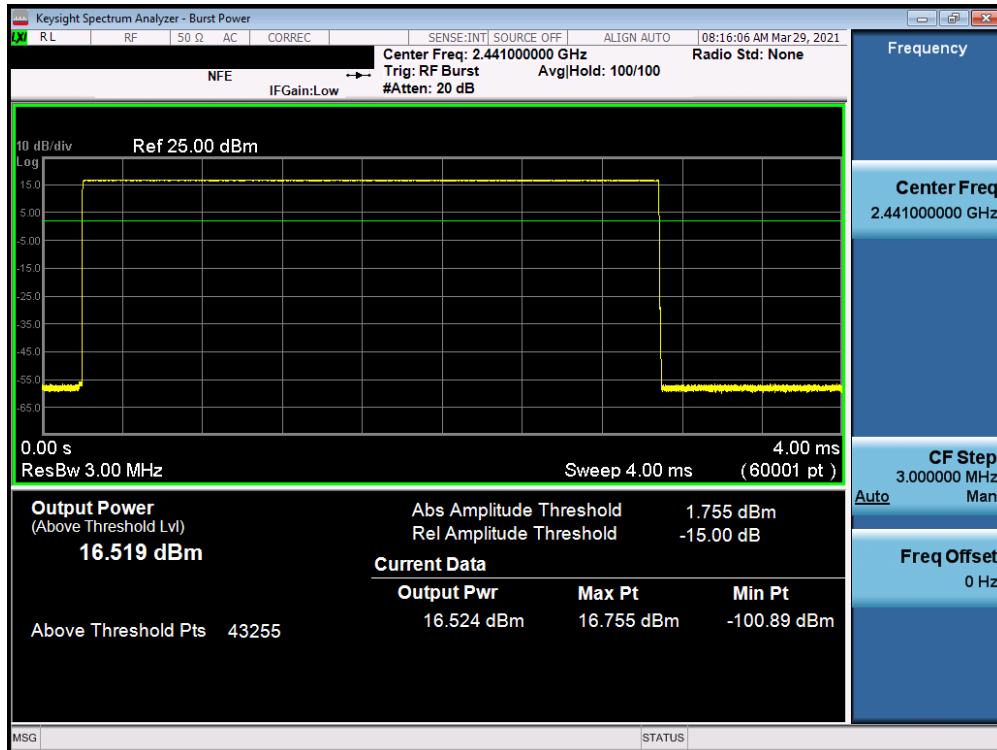


Plot 7-77. Average Conducted Power (1Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 54 of 95

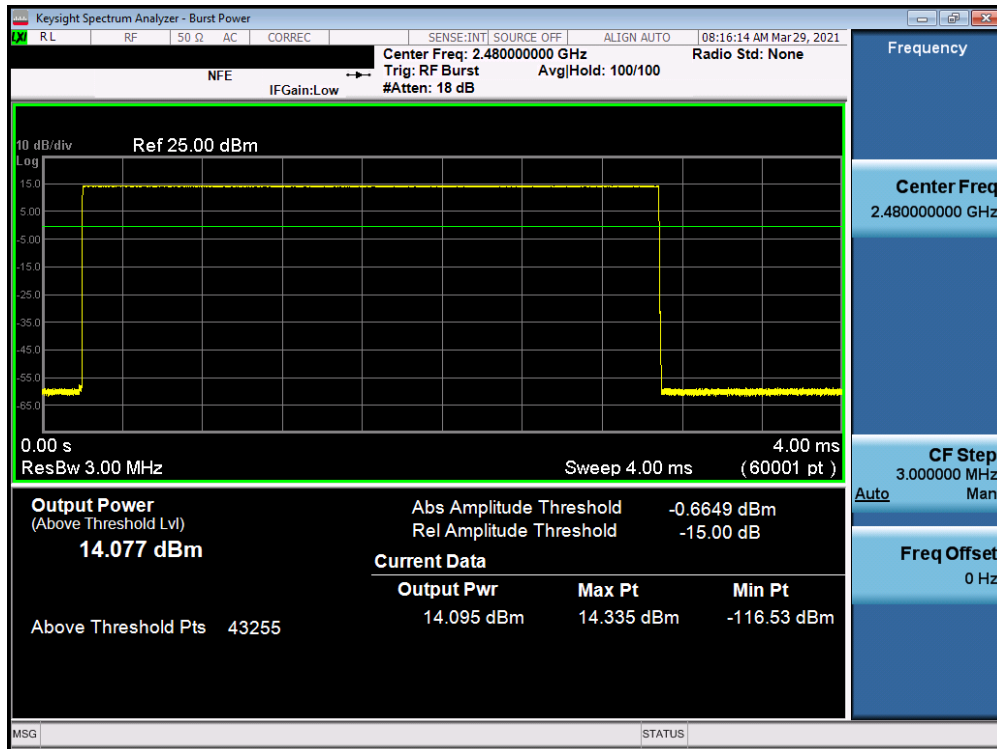


Plot 7-78. Average Conducted Power (1Mbps – Ch. 78) Antenna 1 iPA

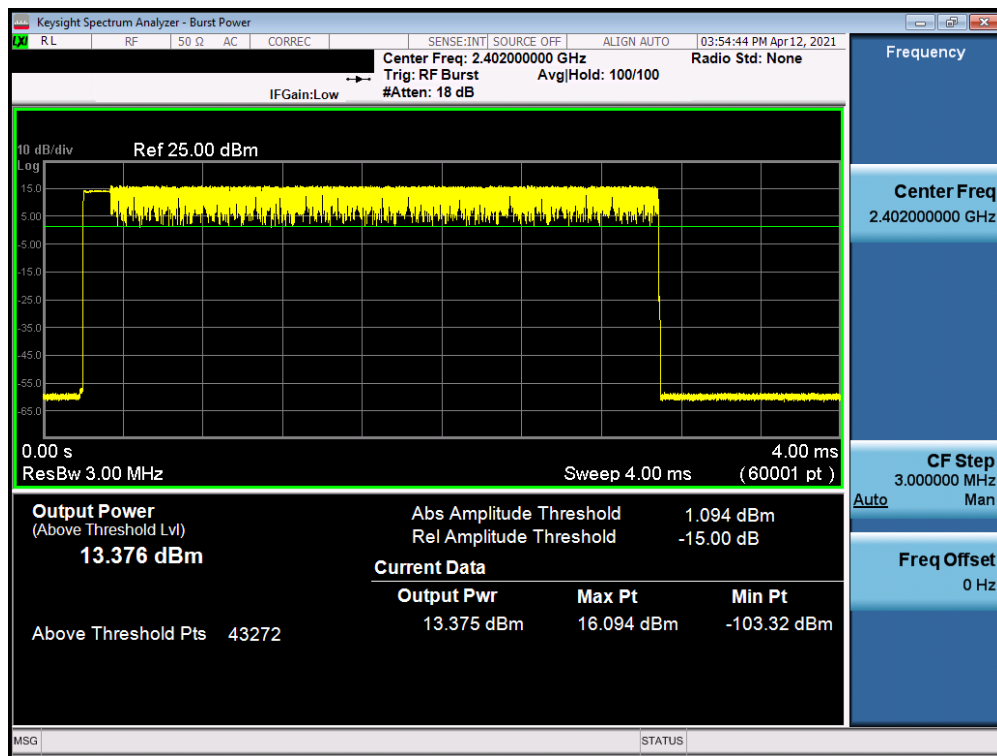


Plot 7-79. Average Conducted Power (2Mbps – Ch. 0) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 55 of 95

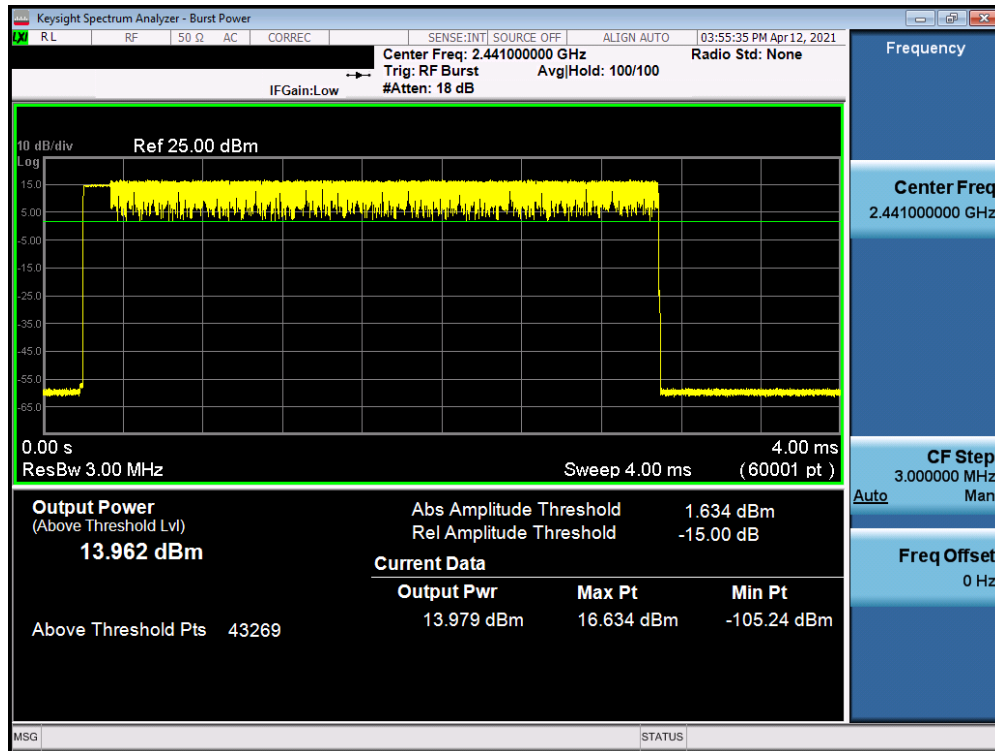


Plot 7-80. Average Conducted Power (2Mbps – Ch. 39) Antenna 1 ePA

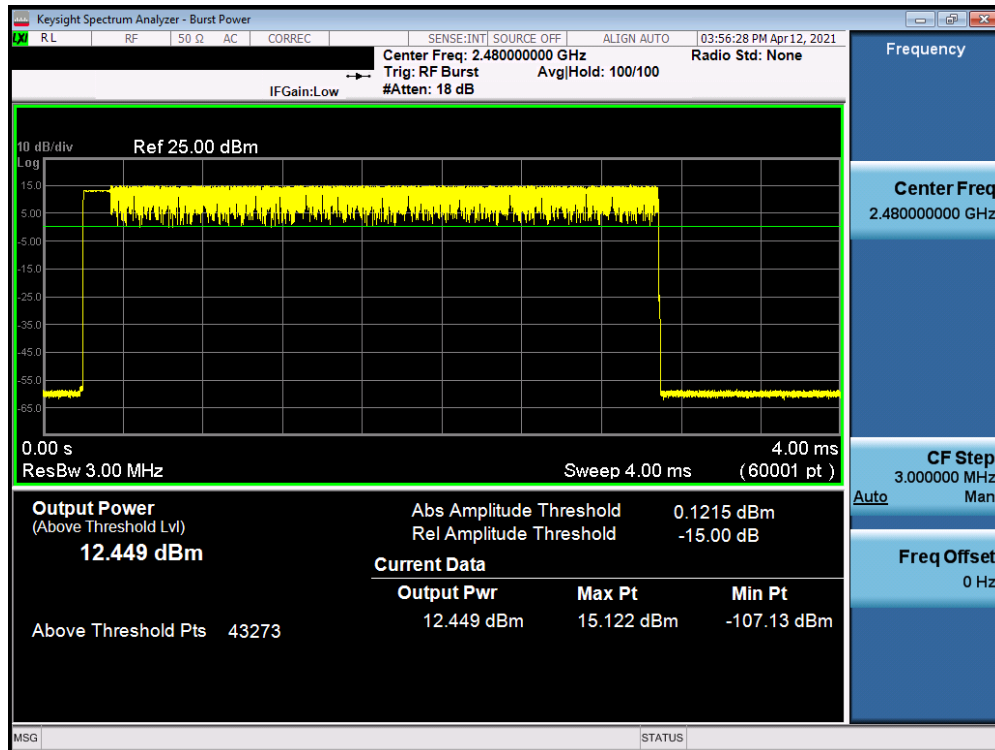


Plot 7-81. Average Conducted Power (2Mbps – Ch. 78) Antenna 1 ePA

FCC ID: A3LSMF926B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 56 of 95

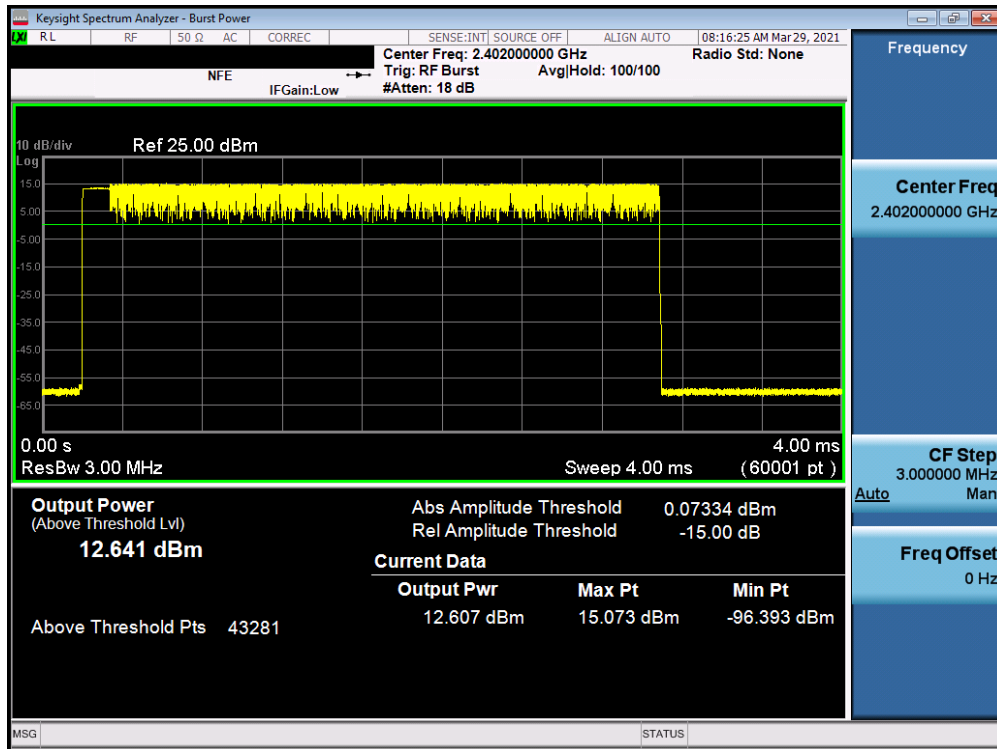


Plot 7-82. Average Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

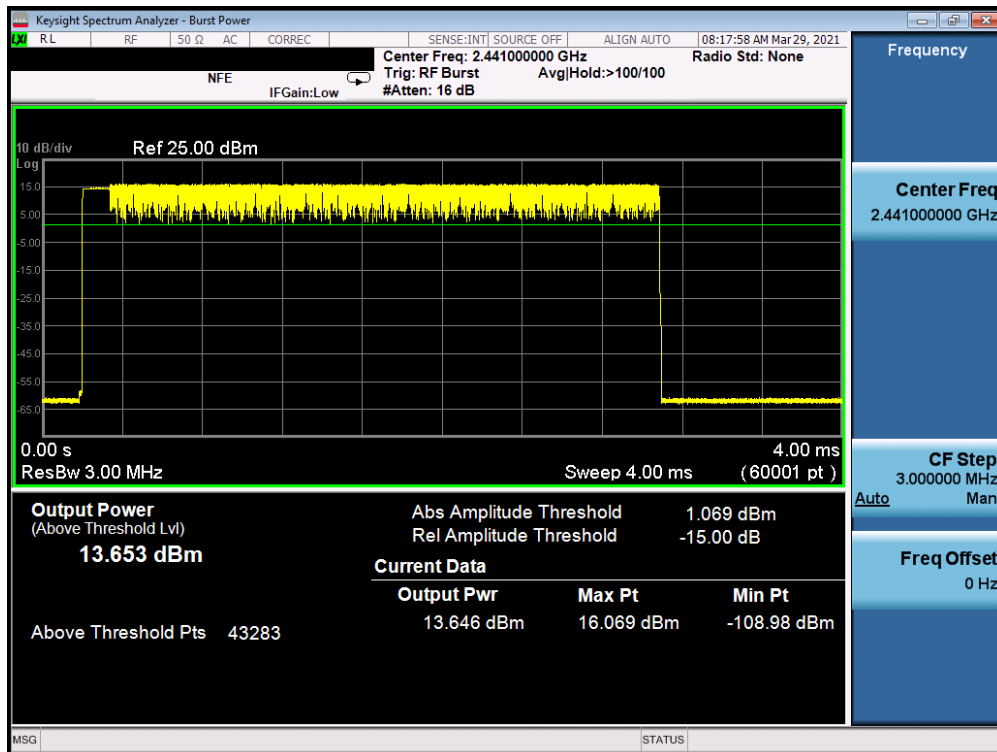


Plot 7-83. Average Conducted Power (2Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 57 of 95

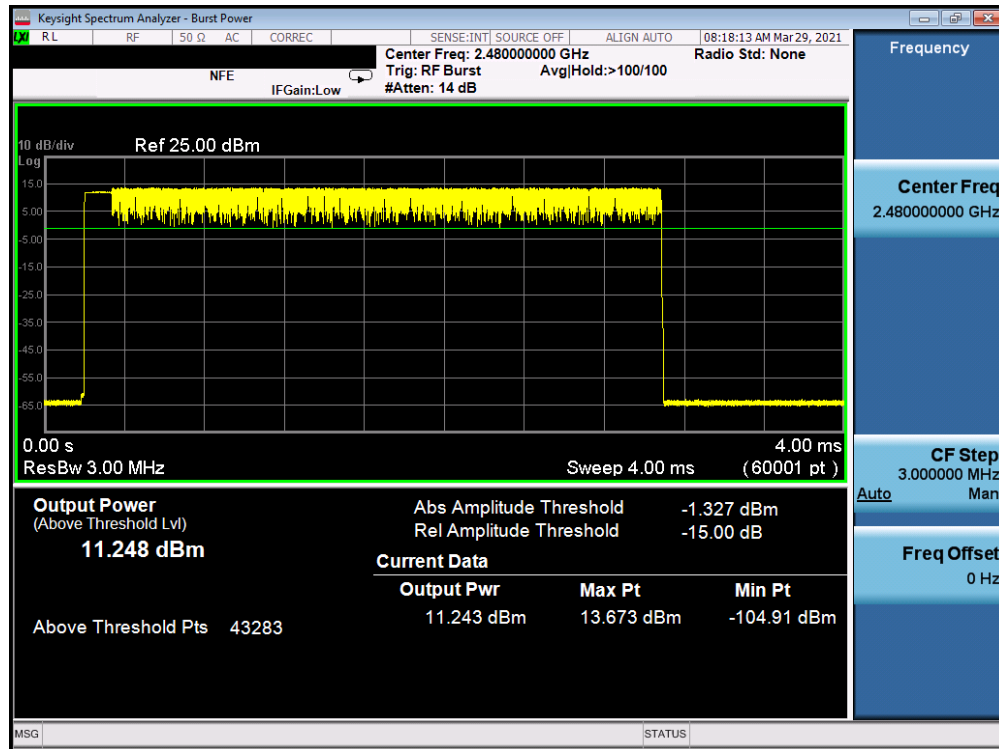

Plot 7-84. Average Conducted Power (2Mbps – Ch. 78) Antenna 1 iPA

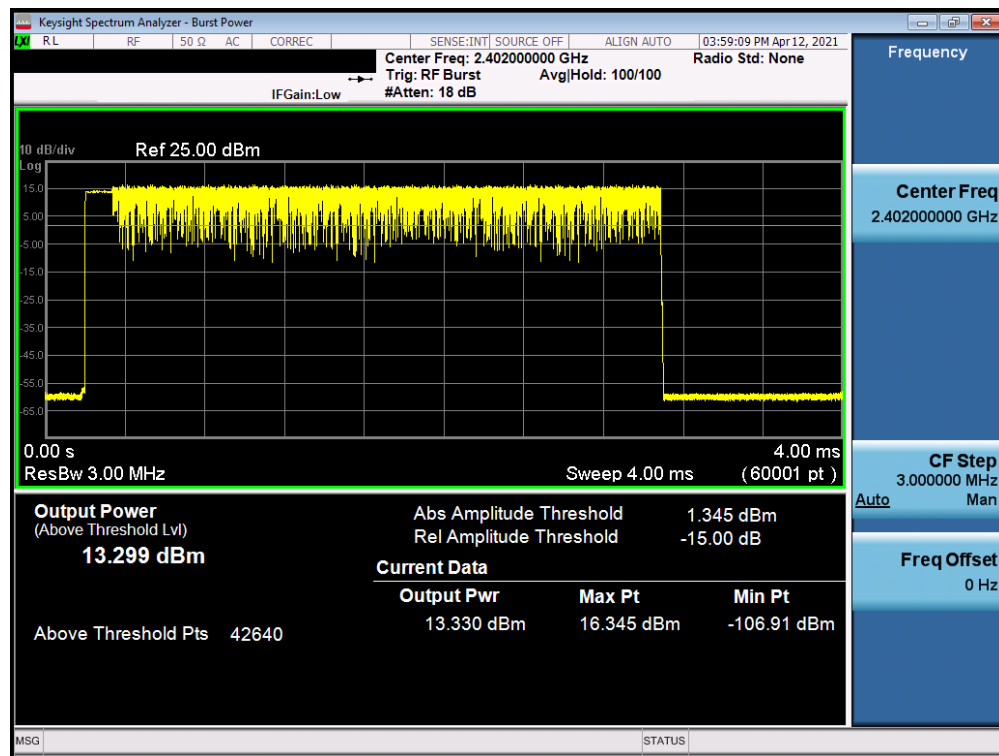

Plot 7-85. Average Conducted Power (3Mbps – Ch. 0) Antenna 1 ePA

FCC ID: A3LSMF926B	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2104190044-07.A3L	Test Dates: 04/22/21 - 06/22/21	EUT Type: Portable Handset		Page 58 of 95