

# CERTIFICATION TEST REPORT

**Report Number. :** 4791196642-E12V1

**Applicant :** SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model :** SC-55E, SCG28

**FCC ID :** A3LSMF956JPN

**EUT Description :** GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
NFC, WPT and UWB

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART F

**Date Of Issue:**

2024-05-31

**Prepared by:**

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2024-05-31	Initial issue	SunGeun Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. SUMMARY TABLE .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
5.2. <i>SAMPLE CALCULATION.....</i>	6
5.3. <i>MEASUREMENT UNCERTAINTY .....</i>	6
5.4. <i>DECISION RULE .....</i>	6
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
6.1. <i>EUT DESCRIPTION.....</i>	7
6.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	8
6.3. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	9
6.4. <i>DESCRIPTION OF TEST SETUP .....</i>	10
<b>7. MEASUREMENT METHOD.....</b>	<b>11</b>
<b>8. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>9. RADIATED BANDWIDTH &amp; POWER &amp; CESSATION TIME TEST RESULTS.....</b>	<b>13</b>
9.1. <i>10 dB BANDWIDTH .....</i>	13
9.1.1. <i>10dB BANDWIDTH MEASUREMENT .....</i>	14
9.1.2. <i>10dB BANDWIDTH PLOT.....</i>	15
9.2. <i>PEAK POWER AND MAXIMUM AVERAGE EMISSIONS.....</i>	16
9.2.1. <i>MAXIMUM PEAK AND AVERAGE POWER .....</i>	17
9.3. <i>CESSATION TIME.....</i>	19
<b>10. RADIATED EMISSION TEST RESULTS.....</b>	<b>22</b>
10.1. <i>LIMITS AND PROCEDURE .....</i>	22
10.2. <i>TRANSMITTER ABOVE 1 GHz .....</i>	25
10.2.1. <i>SPURIOUS EMISSION 1 GHz – 6 GHz .....</i>	25
10.2.2. <i>SPURIOUS EMISSION 9 GHz – 18 GHz .....</i>	27
10.2.3. <i>SPURIOUS EMISSION 18 GHz – 40 GHz .....</i>	29
10.2.4. <i>SPURIOUS EMISSION 1164 MHz – 1240 MHz .....</i>	33
10.2.5. <i>SPURIOUS EMISSION 1559 MHz – 1610 MHz .....</i>	35
10.3. <i>WORST CASE BELOW 1 GHZ.....</i>	37
<b>11. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>38</b>
11.1.1. <i>AC Power Line .....</i>	39

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB  
**MODEL NUMBER:** SC-55E, SCG28  
**SERIAL NUMBER:** R3CX30KWSQE, R3CX30KWWGX (RADIATED);  
**DATE TESTED:** 2024-04-19 ~ 2024-05-31

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart F	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL KOREA LTD. By:



Seokhwan Hong  
Suwon Lab Engineer  
UL KOREA LTD.

Tested By:



Sungeun Lee  
Suwon Lab Engineer  
UL KOREA LTD.

## 2. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.503(a)	10 dB Bandwidth	> 500MHz	Radiated	Complies
15.519(e) 15.521(g)	Maximum Peak Power Spectral Density	< 0 dBm e.i.r.p. in 50 MHz BW		Complies
15.519(c)	Radiated Emissions Above 960 MHz	Refer to the table in 15.519(c) for details		Complies
15.519(d)	Radiated Emissions in the 1164 - 1240 MHz and 1559 - 1610 MHz GPS Bands	Refer to the table in 15.519(d) for details		Complies
15.209	Radiated Emissions Below 960 MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Complies
15.207(a)	AC Power Line conducted emissions	< FCC Part 15.207 limits	Power Line conducted	Complies
15.519 (a)(1)	Shutdown Timing Requirements	< 10s	Radiated	Complies

## 3. TEST METHODOLOGY

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. ANSI C63.10-2013.
4. KDB 393764 D01 UWB FAQ v02

## 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP (dBm)

= Measured Voltage (dBuV) – 107 dB + Conversion Factor (dB) + Antenna Factor (dB/m)  
+ Total Loss [Cable Loss (dB) – Preamp Gain (dB)]

EIRP (dBm)

= -1.92 dBm = 87.13 dBuV – 107 dB + 11.80 dB + 35.40 dB/m – 29.25 dB

Conversion Factor:

$P \text{ (dBm EIRP)} = E \text{ (dBuV/m)} - 95.2 \text{ dB}$

$P \text{ (dBm EIRP)} = E \text{ (dBuV)} - 107 \text{ dB}$

$E \text{ (dBuV)} - E \text{ (dBuV/m)} = 11.80 \text{ dB}$

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.79 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.07 dB
Radiated Disturbance, 1 GHz to 18 GHz	4.99 dB
Radiated Disturbance, Above 18 GHz	5.96 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

## 6. EQUIPMENT UNDER TEST

### 6.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB. This test report addresses the UWB operational mode.

Representative model	Difference	Derivative model
		SCG28
SC-55E	Hardware	Same as SC-55E
	Software	Different UI

The model SC-55E was used for final testing and is representative of the test results in this report.

The EUT is a UWB transceiver with 1 TX antenna (Ant1) installed in a smart phone host and operates on 6.5 GHz (Channel 5) and 8 GHz (Channel 9). Three signal configurations (CONFIG SP0, SP1, SP3) are available for each ANT/CH setting. CONFIG 2 is not supported.

Worst Case Preamble ID (BPRF: 9 – 24 / HPRF: 25 – 32): BPRF: 9 / HPRF: 25

ANT	Channel	CONFIG	PRF Mode	Packet Length
Ant1	5	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
	9	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127

## 6.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with maximum gain of

Frequency Band [MHz]	ANT1 Gain [dBi]
CH5 6500	-4.10
CH9 8000	-2.50

“Inverted-F (SUB3) ANTENNA” as indicated in antenna specification are written as ANT 1 in this report.



### 6.3. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.


Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

i. Worst case of antenna axis:

	ANT1
CH5	Z
CH9	Z

ii. Foldable condition

	ANT1
CH5	Full-Folded
CH9	Full-Folded

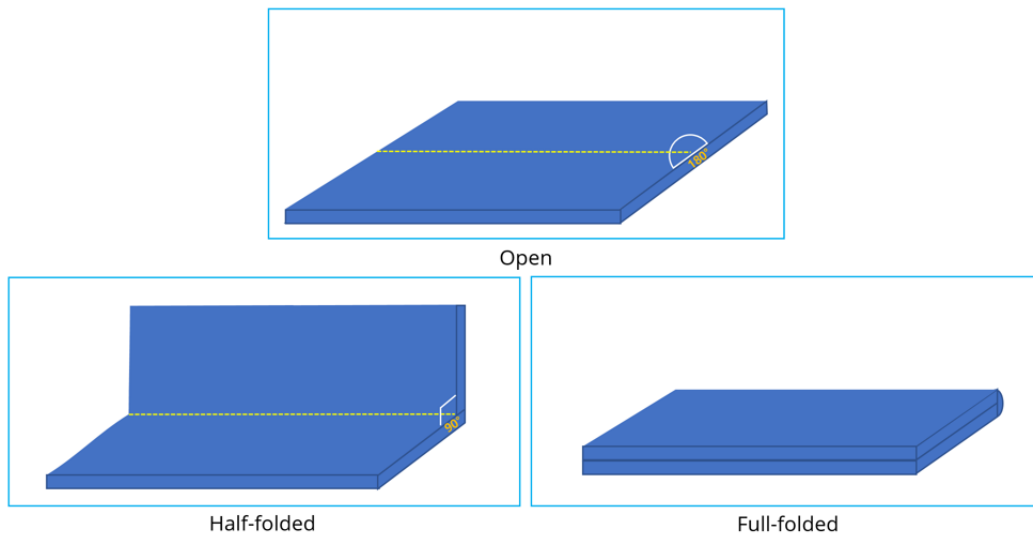

Note: All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

## 6.4. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37N9QP6H09DK3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02111A	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests.  
 Test software in hidden menu exercised the EUT to enable UWB mode.

### SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP) 50cm for Spurious, 3m for EIRP.

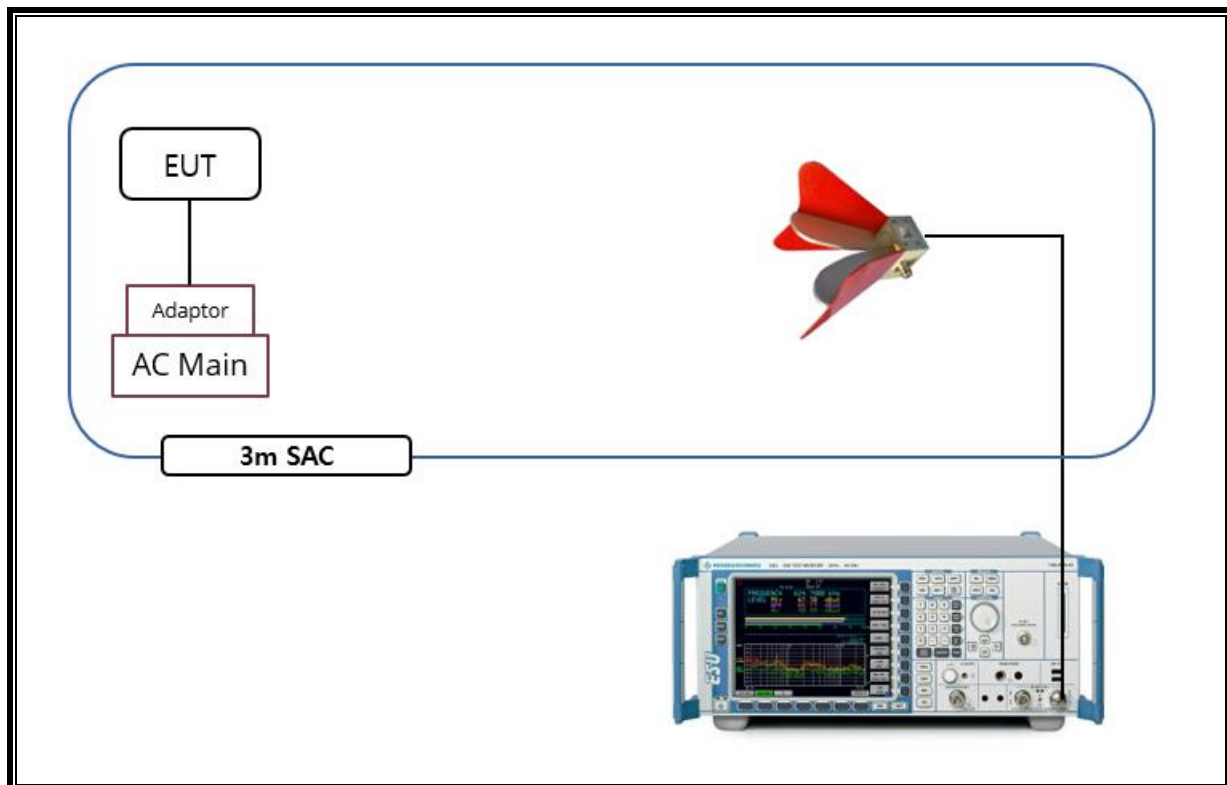

---

## 7. MEASUREMENT METHOD

10 dB BW : ANSI C63.10-2013, Section 10.1 / FCC Part §15.503(a)

Peak power and maximum average emissions: ANSI C63.10-2013 Section 10.3, 15.519(c)(e)

Cessation time: 15.519(a)(1)

Radiated measurement procedure: ANSI C63.10-2013, Section 10.3

AC Power Line Conducted Emission: ANSI C63.10-2013, Section 6.2

## 8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Horn, 18 GHz	ETS	3115	00167211	2024-08-04
Antenna, Horn, 18 GHz	ETS	3115	00161451	2024-08-21
Antenna, Horn, 18 GHz	ETS	3117	00168724	2024-08-04
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024-08-21
Antenna, Horn, 18 GHz	ETS	3117	00218957	2025-01-08
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024-08-02
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2025-10-05
Preamplifier	ETS	3115-PA	00167475	2024-07-25
Preamplifier	ETS	3116C-PA	00168841	2024-07-25
Preamplifier, 1000 MHz	Sonoma	310N	341282	2024-07-24
Preamplifier, 1000 MHz	Sonoma	310N	351741	2024-07-24
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2024-07-25
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2024-07-24
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2024-07-24
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2024-07-24
Spectrum Analyzer, 50 GHz	R&S	FSW 50	101538	2025-01-02
Attenuator	PASTERNAK	PE7087-10	A001	2024-07-23
Attenuator	PASTERNAK	PE7087-10	A008	2024-07-27
Attenuator	PASTERNAK	PE7004-10	2	2024-07-23
Attenuator	PASTERNAK	PE7087-10	A009	2024-07-24
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2024-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2024-07-24
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2024-07-23
High Pass Filter	Wainwright Instruments GmbH	WHW2-8165-11500-21000-40CD	11	2025-01-02
High Pass Filter	Wainwright Instruments GmbH	WHW2-7100-10000-18000-40CD	2	2025-01-02
Low Pass Filter	Wainwright Instruments GmbH	WLKX12-5400-5940-18000-60ST	1	2025-01-02
Low Pass Filter	Wainwright Instruments GmbH	WLKX10-6400-7424-18000-60ST	1	2025-01-02
LISN	R&S	ENV-216	101836	2024-07-23
LISN	R&S	ENV-216	101837	2024-07-23
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 9. RADIATED BANDWIDTH & POWER & CESSATION TIME TEST RESULTS

### 9.1. 10 dB BANDWIDTH

#### LIMITS

FCC §15.503

(a) UWB bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ . The frequency at which the highest radiated emission occurs is designated  $f_M$ .

(b) Center frequency. The center frequency,  $f_c$ , equals  $(f_H + f_L)/2$ .

(c) Fractional bandwidth. The fractional bandwidth equals  $2(f_H - f_L) / (f_H + f_L)$ .

(d) Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

FCC §15.519

(b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

#### Test Procedure

ANSI C63.10-2013 – Section 10.1

#### Test settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span was set wide enough to capture the 10dB points of the signal
4. Sweep = auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. The trace was allowed to stabilize

#### RESULTS


Worst cases were tested and reported.

**9.1.1. 10dB BANDWIDTH MEASUREMENT**

ANT	Channel	CONFIG	PRF Mode	Packet Length	f <sub>M</sub> (MHz)	f <sub>L</sub> (MHz)	f <sub>H</sub> (MHz)	f <sub>C</sub> (MHz)	BW (MHz)	fractional bandwidth
Ant1	CH5	SP0	BPRF9	4	6334.08	6218.14	6740.38	6479.26	522.24	0.08
		SP1	BPRF9	4	6334.08	6215.64	6740.88	6478.26	525.24	0.08
		SP3	BPRF9	4	6396.05	6206.15	6750.87	6478.51	544.72	0.08
	CH9	SP0	BPRF9	4	7831.58	7706.65	8252.87	7979.76	546.22	0.07
		SP1	BPRF9	4	7831.58	7705.65	8252.37	7979.01	546.72	0.07
		SP3	BPRF9	4	7768.62	7702.15	8268.87	7985.51	566.72	0.07

### 9.1.2. 10dB BANDWIDTH PLOT

- ANT1

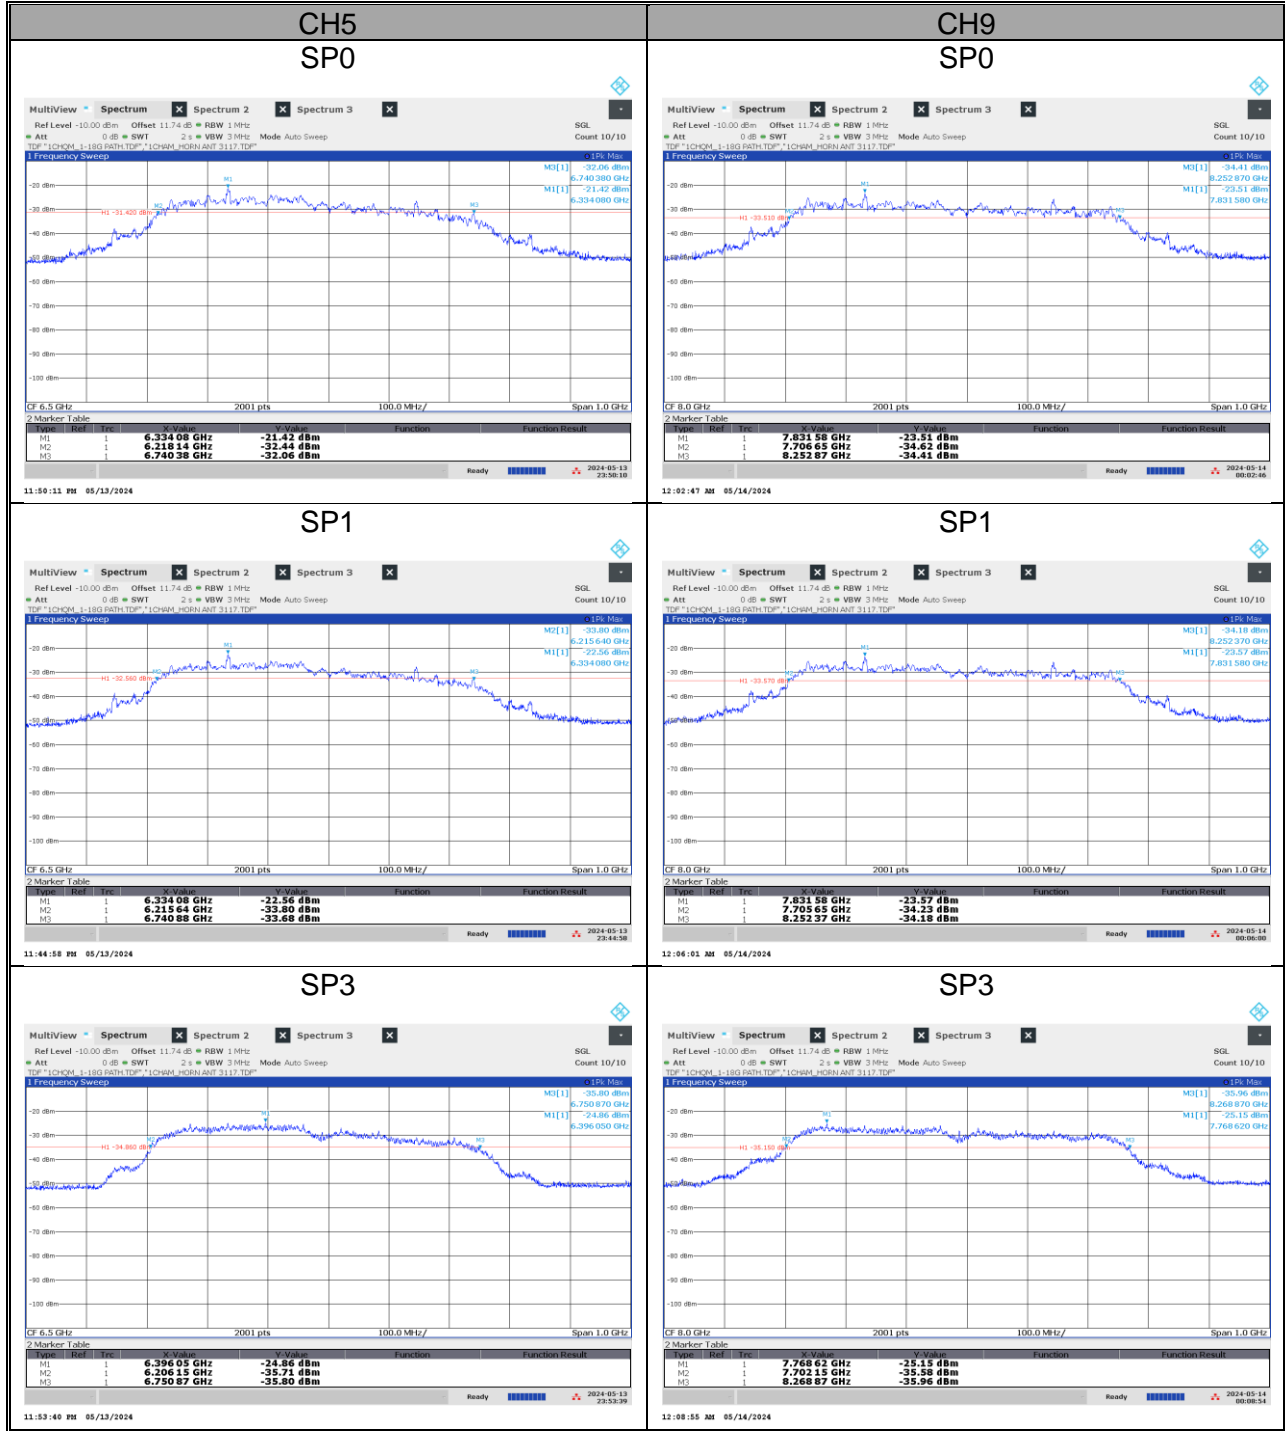

## 9.2. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

### LIMITS

FCC §15.519

(c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100-10600	-41.3

(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_m$ . That limit is 0 dBm EIRP.

### TEST PROCEDURE

ANSI C63.10 Clause 10.3.

Peak EIRP power is measured using RBW of 50 MHz.

The radiated emissions of 6 – 9 GHz frequency band are performed at 3 meter test distance.

### Test Notes

The EIRP in dBm was calculated from the measurement Field Strength in dBuV/m by applying a -95.2dB correction factor to the Field Strength level.

### RESULTS

Plots: worst cases were reported.




**9.2.1. MAXIMUM PEAK AND AVERAGE POWER**


ANT	Channel	CONFIG	PRF Mode	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin	AV Power (dBm/MHz)	AV Limit (dBm/MHz)	Margin
Ant1	CH5	SP0	BPRF4	-1.65	0	1.65	-43.88	-41.3	2.58
			BPRF127	-4.34	0	4.34	-43.27	-41.3	1.97
			HPRF127	-9.80	0	9.80	-43.19	-41.3	1.89
		SP1	BPRF4	-2.87	0	2.87	-43.35	-41.3	2.05
			BPRF127	-5.43	0	5.43	-43.36	-41.3	2.06
			HPRF127	-10.98	0	10.98	-43.04	-41.3	1.74
		SP3	BPRF4	-9.91	0	9.91	<b>-42.98</b>	-41.3	1.68
			BPRF127	-9.96	0	9.96	-43.08	-41.3	1.78
			HPRF127	-12.06	0	12.06	-43.14	-41.3	1.84
	CH9	SP0	BPRF4	-1.80	0	1.80	-45.48	-41.3	4.18
			BPRF127	-3.02	0	3.02	-43.19	-41.3	1.89
			HPRF127	-9.71	0	9.71	-43.42	-41.3	2.12
		SP1	BPRF4	-1.96	0	1.96	-43.52	-41.3	2.22
			BPRF127	-4.24	0	4.24	-43.37	-41.3	2.07
			HPRF127	-10.34	0	10.34	-43.19	-41.3	1.89
		SP3	BPRF4	-9.78	0	9.78	<b>-42.97</b>	-41.3	1.67
			BPRF127	-9.87	0	9.87	-43.00	-41.3	1.70
			HPRF127	-11.72	0	11.72	-43.20	-41.3	1.90

**MAXIMUM PEAK AND AVERAGE POWER PLOTS**

**- PEAK POWER  
 - ANT1**

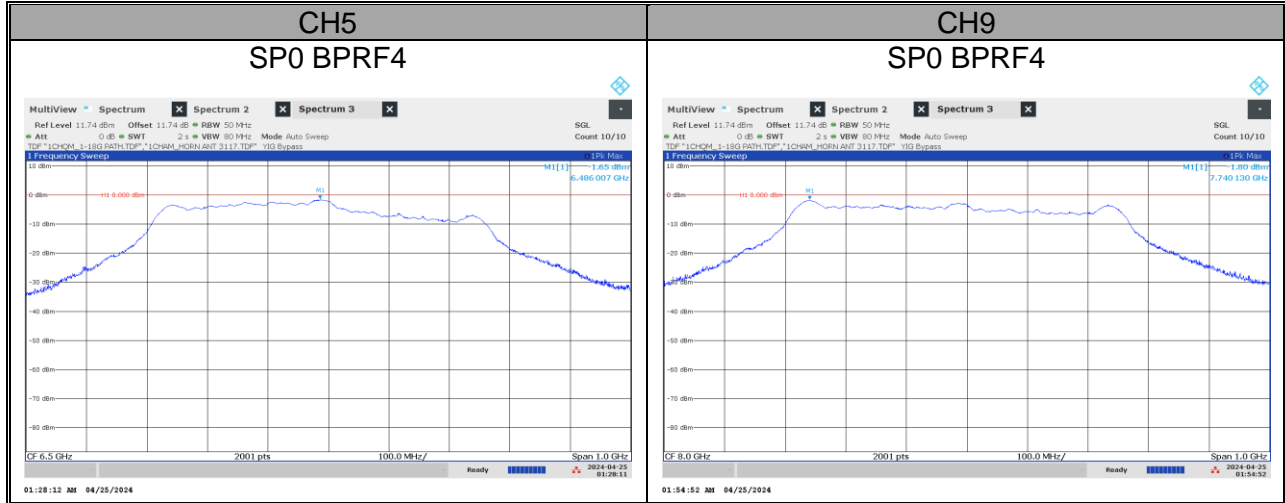

**- AVERAGE POWER  
 - ANT1**

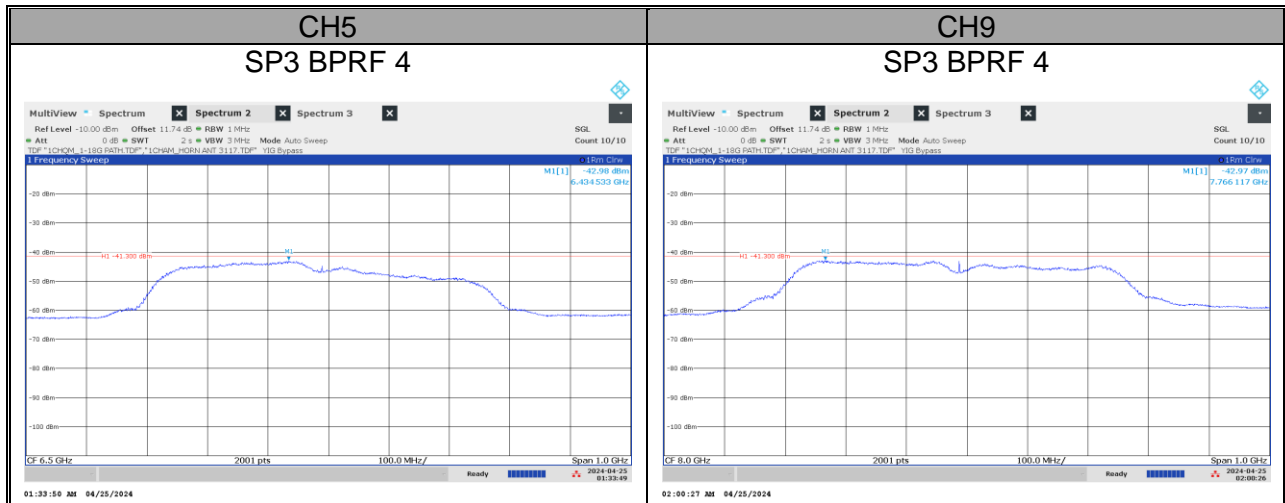

### **9.3. CESSATION TIME**

#### **LIMITS**

FCC §15.519(a)(1)

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

#### **TEST PROCEDURES**

Transmissions are monitored for two cases:

1. The smart phone ends the UWB link.
2. The EUT ends the UWB link.

#### **RESULTS**

Please see the next page

Case 1: Smart Phone ends the UWB link



Marker 1: Smart phone ends UWB link.

Marker 2Δ1: EUT and smart phone end UWB link.

Marker 3Δ1: “10s” after EUT ends UWB link.

**EUT detects “Smart Phone ends UWB link” and ceases transmitting within 10 seconds.**

Case 2: EUT ends the UWB link



- Marker 1: EUT ends UWB link.
- Marker 2Δ1: EUT and smart phone end UWB link.
- Marker 3Δ1: “10s” after EUT ends UWB link.

**EUT ceases transmitting within 10 seconds.**

## 10. RADIATED EMISSION TEST RESULTS

### 10.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ FCC Part 15.519 (c): The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency range (MHz)	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

▪ FCC Part 15.519 (d): In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency range (MHz)	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

**TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 0.5 or 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz (120kHz for emissions in the GPS), then the video bandwidth is set to 3 MHz (500kHz for emissions in the GPS)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

Radiated test was performed worst case as below table. (Highest Average Power)

	ANT1
CH5	SP3 / BPRF9 / Packet Length 4
CH9	SP3 / BPRF9 / Packet Length 4




## 10.2. TRANSMITTER ABOVE 1 GHz


### 10.2.1. SPURIOUS EMISSION 1 GHz – 6 GHz TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

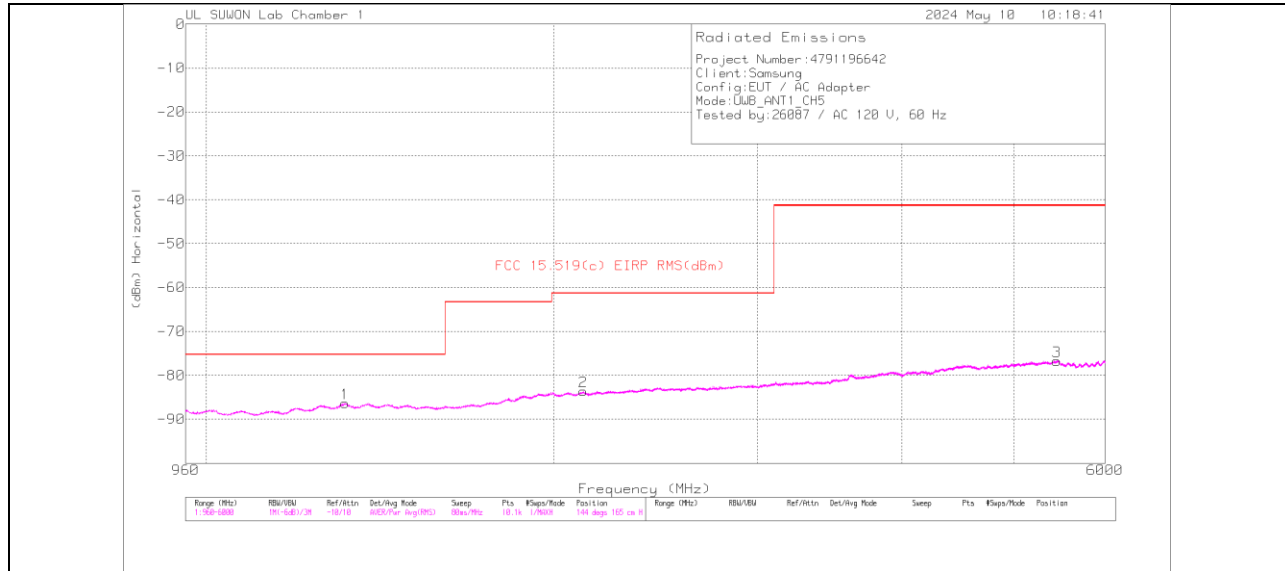

#### VERTICAL RESULT

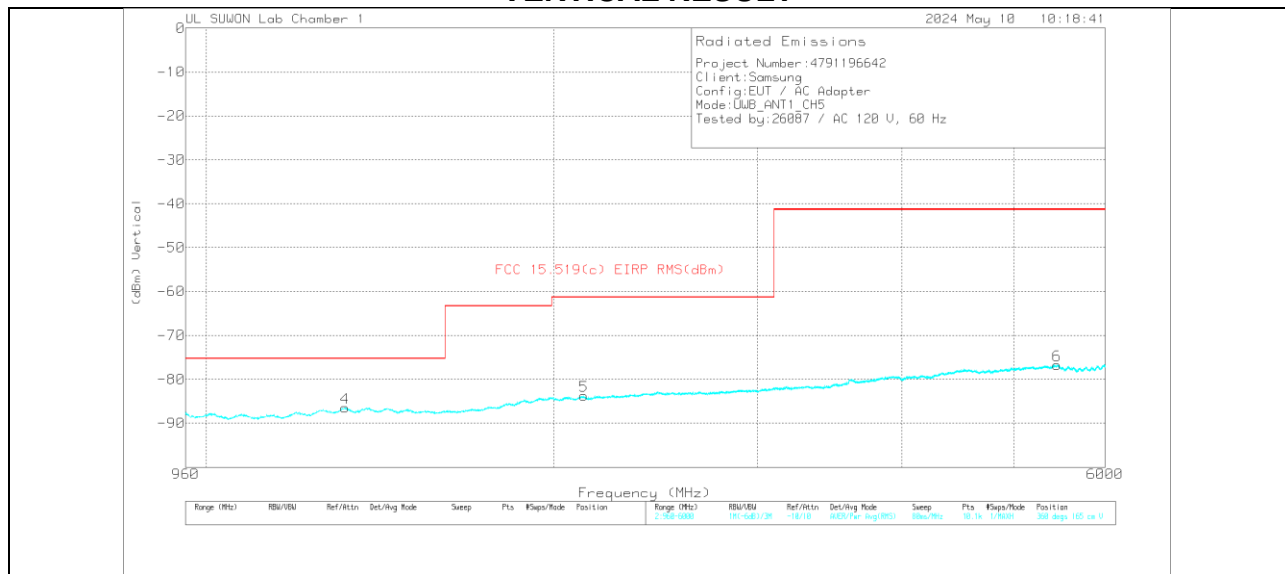


#### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	FCC 15.519(c) EIRP RMS(dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1318.7882	-75.4	RMS	29.5	-37.2	-15.6	11.8	.6	-86.3	-75.3	-11	324	165	H
2	2121.6953	-76.15	RMS	31.6	-36	-15.6	11.8	.7	-83.65	-61.3	-22.35	324	165	H
3	5448.595	-76.55	RMS	34.7	-33.3	-15.6	11.8	2.2	-76.75	-41.3	-35.45	360	165	H
4	1318.7882	-75.52	RMS	29.5	-37.2	-15.6	11.8	.6	-86.42	-75.3	-11.12	180	165	V
5	2124.1903	-76.22	RMS	31.6	-36	-15.6	11.8	.7	-83.72	-61.3	-22.42	324	165	V
6	5453.8346	-76.58	RMS	34.7	-33.3	-15.6	11.8	2.2	-76.78	-41.3	-35.48	252	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

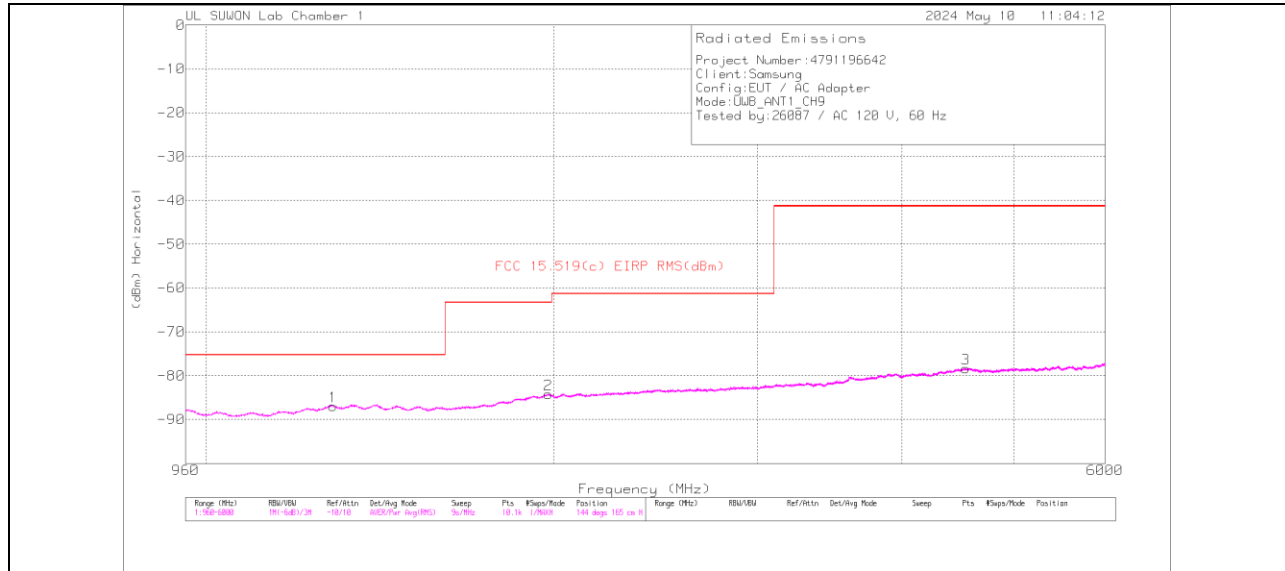

**VERTICAL RESULT**

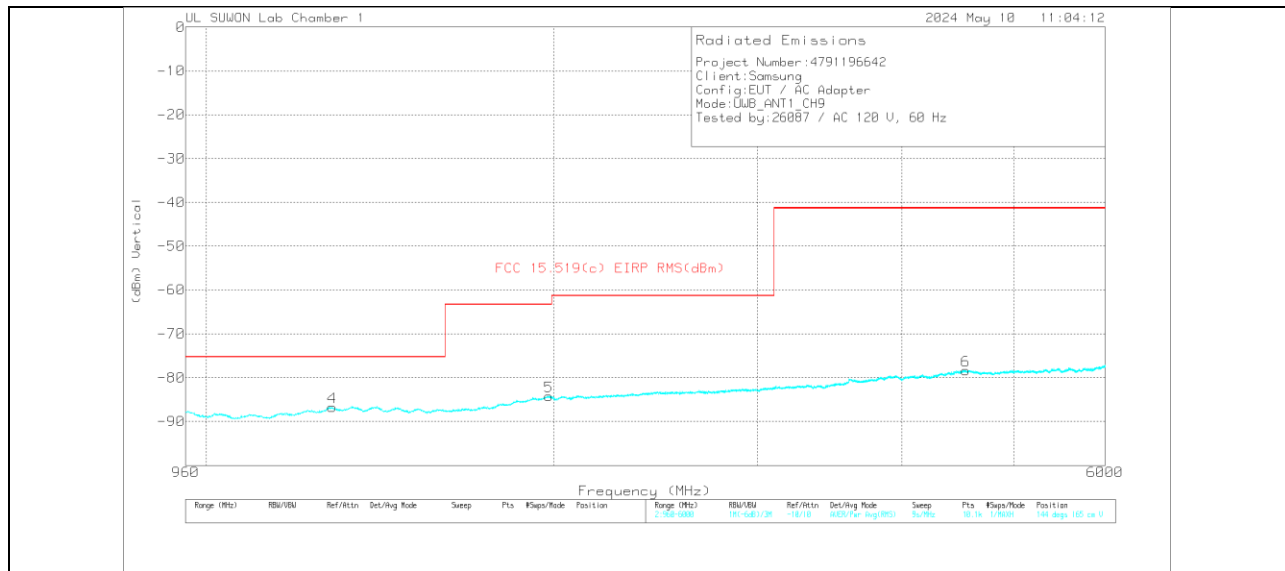

**Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	FCC 15.519(c) ERP RMS(dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1287.3506	-75.85	RMS	29.4	-37.3	-15.6	11.8	.6	-86.95	-75.3	-11.65	288	165	H
2	1978.9784	-76.17	RMS	31.3	-36.2	-15.6	11.8	.6	-84.27	-63.3	-20.97	252	165	H
3	4544.8878	-75.93	RMS	34.3	-33.7	-15.6	11.8	.8	-78.33	-41.3	-37.03	180	165	H
4	1285.8535	-75.66	RMS	29.4	-37.3	-15.6	11.8	.6	-86.76	-75.3	-11.46	144	165	V
5	1979.4774	-76.1	RMS	31.3	-36.2	-15.6	11.8	.6	-84.2	-63.3	-20.9	216	165	V
6	4545.3869	-75.93	RMS	34.3	-33.7	-15.6	11.8	.8	-78.33	-41.3	-37.03	108	165	V

RMS - RMS detection

### 10.2.2. SPURIOUS EMISSION 9 GHz – 18 GHz


#### TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT



#### VERTICAL RESULT

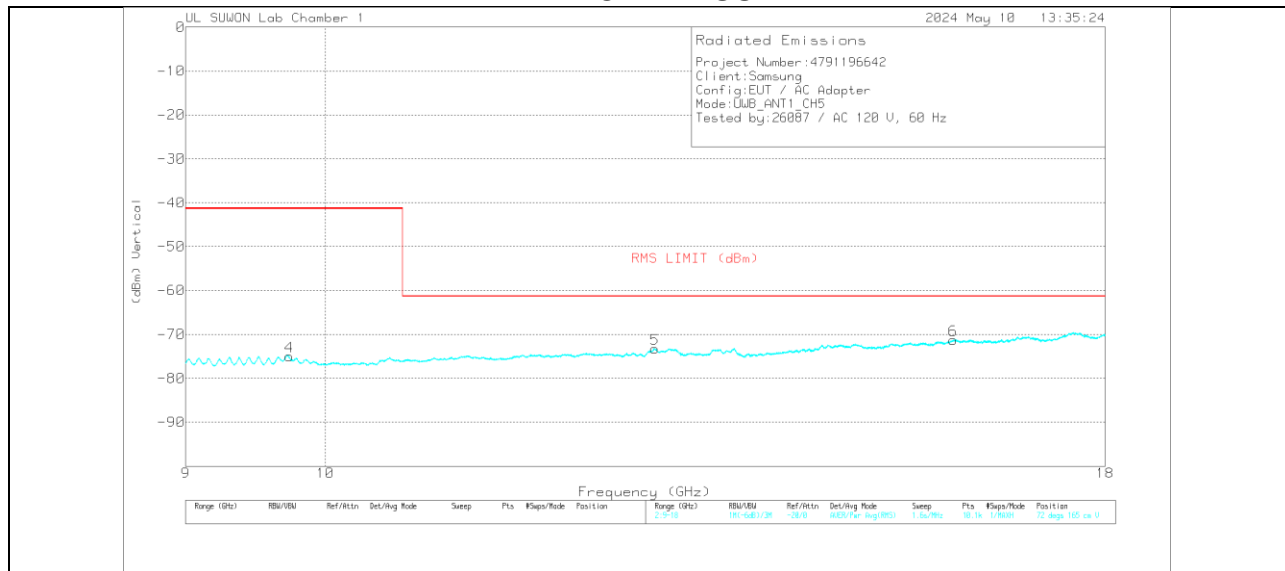


#### Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	9.72356	-82.45	RMS	37.3	-27.9	-15.6	11.8	2	-74.85	-61.3	-33.55	36	165	H
2	12.83436	-83.72	RMS	39.1	-25.2	-15.6	11.8	-1	-73.52	-61.3	-12.22	217	165	H
3	16.05386	-83.72	RMS	40.7	-24.7	-15.6	11.8	-3	-71.22	-61.3	-9.92	72	165	H
4	9.73248	-82.45	RMS	37.3	-28	-15.6	11.8	2	-74.95	-61.3	-33.65	72	165	V
5	12.82188	-83.49	RMS	39.1	-25.2	-15.6	11.8	-1	-73.29	-61.3	-11.99	252	165	V
6	16.05208	-83.71	RMS	40.7	-24.7	-15.6	11.8	-3	-71.21	-61.3	-9.91	36	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

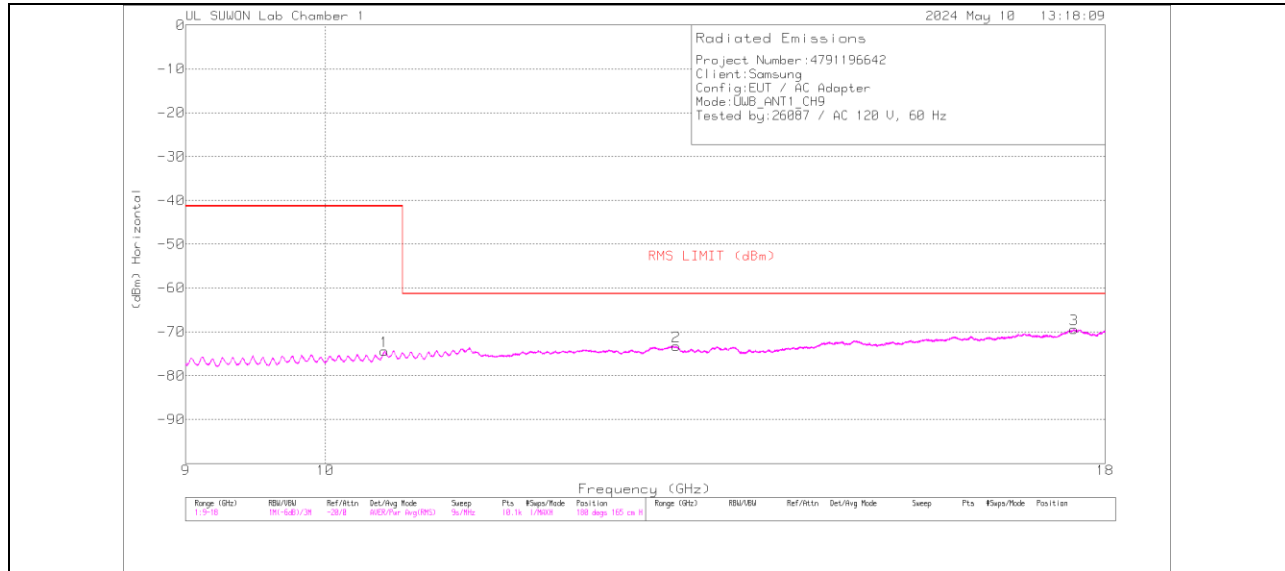

**VERTICAL RESULT**

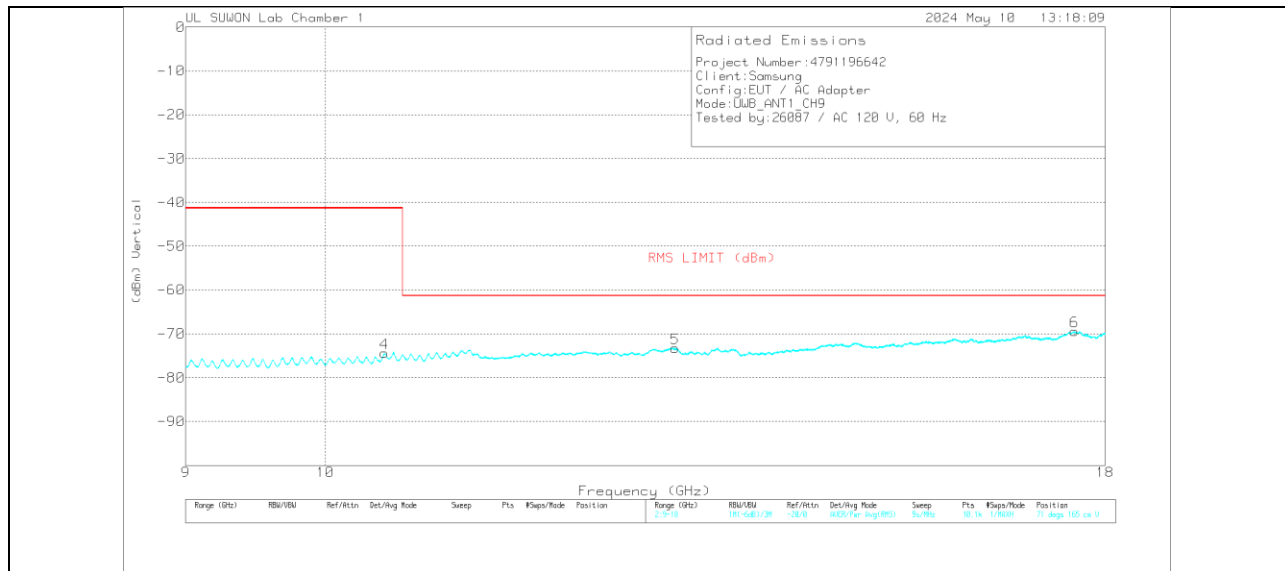

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.45604	-82.71	RMS	37.7	-27	-15.6	11.8	1.4	-74.41	-61.3	-33.11	360	165	H
2	13.0295	-83	RMS	38.9	-25.5	-15.6	11.8	.2	-73.2	-61.3	-11.9	360	165	H
3	17.58119	-84.24	RMS	41.2	-22.9	-15.6	11.8	.3	-69.44	-61.3	-8.14	109	165	H
4	10.45426	-82.68	RMS	37.7	-27	-15.6	11.8	1.4	-74.38	-61.3	-33.08	288	165	V
5	13.01703	-83.09	RMS	38.9	-25.5	-15.6	11.8	.2	-73.29	-61.3	-11.99	71	165	V
6	17.58742	-84.17	RMS	41.2	-22.9	-15.6	11.8	.3	-69.37	-61.3	-8.07	180	165	V


RMS - RMS detection

### 10.2.3. SPURIOUS EMISSION 18 GHz – 40 GHz


#### TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

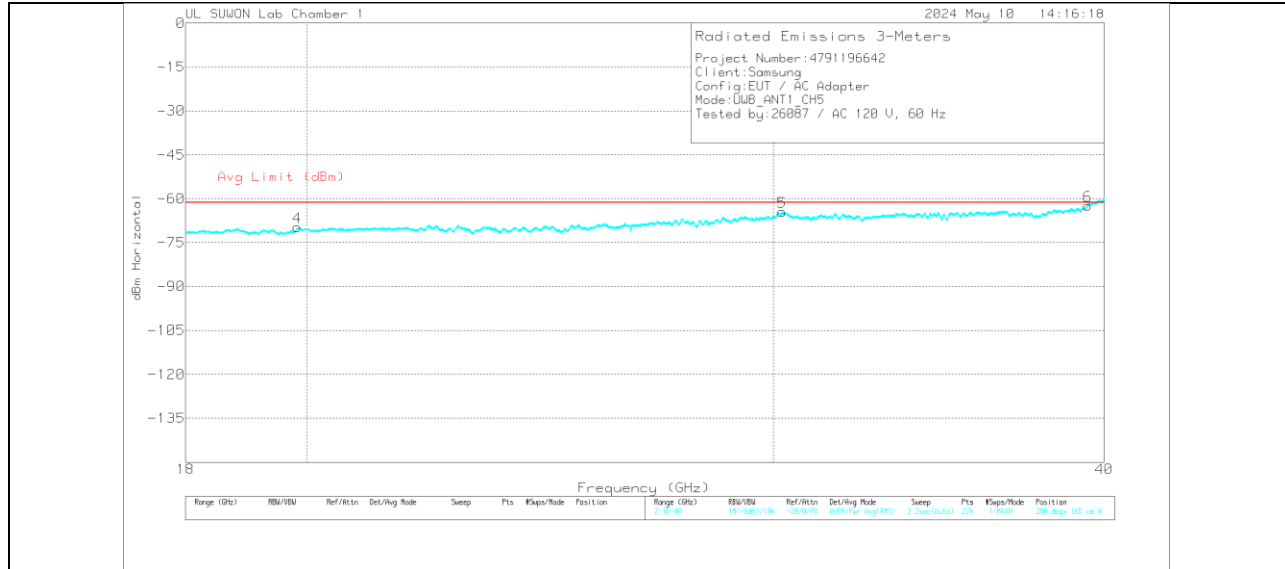

#### VERTICAL RESULT

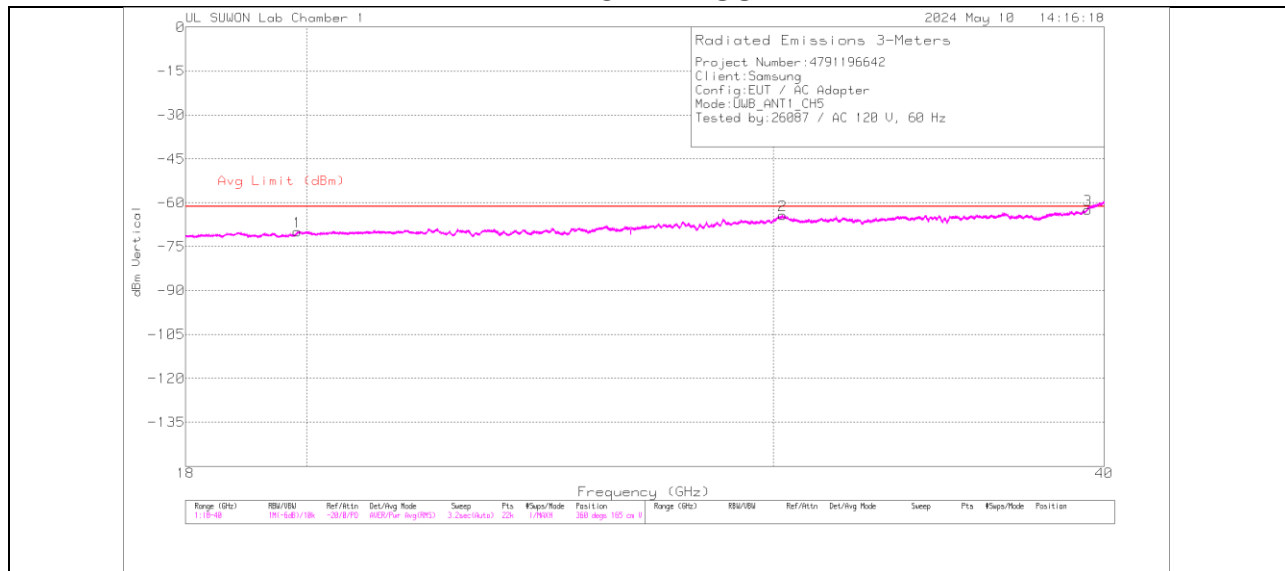


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz(dB)	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.83992	-88.54	RMS	6.3	16.2	11.8	-15.6	-69.84	-61.3	-8.54	144	165	V
2	30.24645	-94.64	RMS	13.5	20.7	11.8	-15.6	-64.24	-61.3	-2.94	144	165	V
3	39.42704	-93.94	RMS	11.9	23.5	11.8	-15.6	-62.34	-61.3	-1.04	288	165	V
4	19.84092	-88.45	RMS	6.3	16.2	11.8	-15.6	-69.75	-61.3	-8.45	252	165	H
5	30.23645	-94.87	RMS	13.5	20.7	11.8	-15.6	-64.47	-61.3	-3.17	252	165	H
6	39.43104	-94.07	RMS	11.9	23.6	11.8	-15.6	-62.37	-61.3	-1.07	180	165	H

RMS - RMS detection


### Zoom Scan

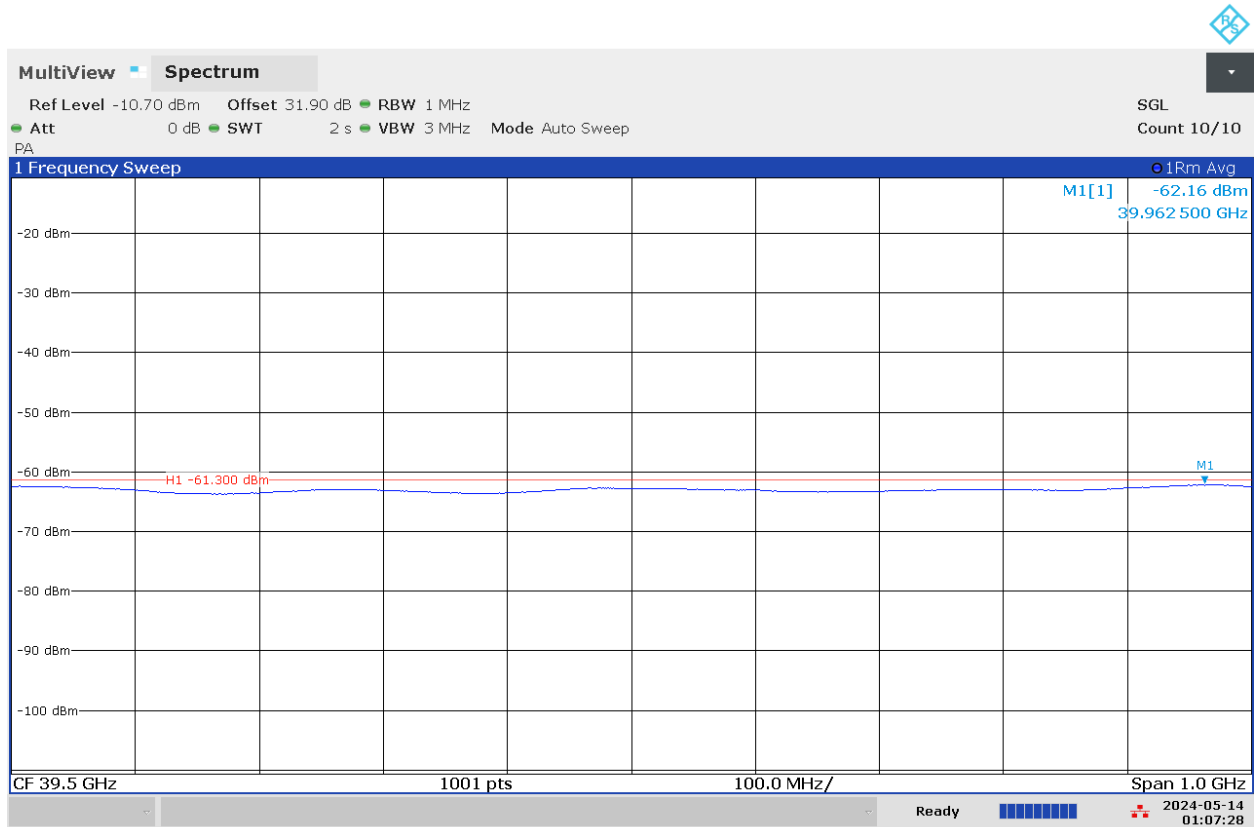


01:07:28 AM 05/14/2024

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

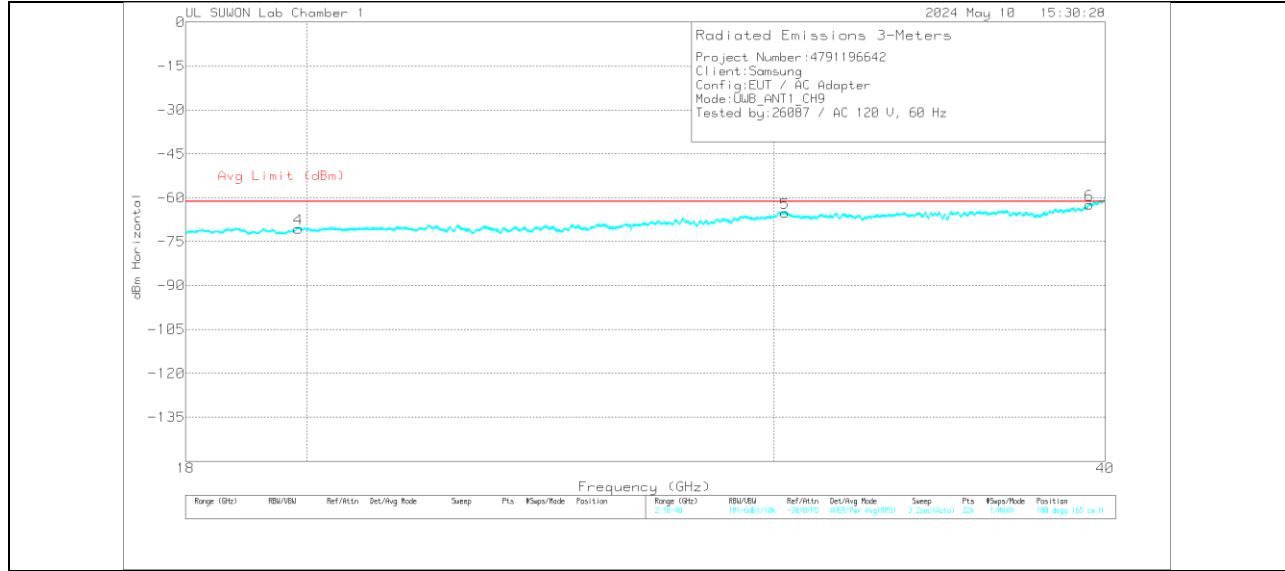

**VERTICAL RESULT**

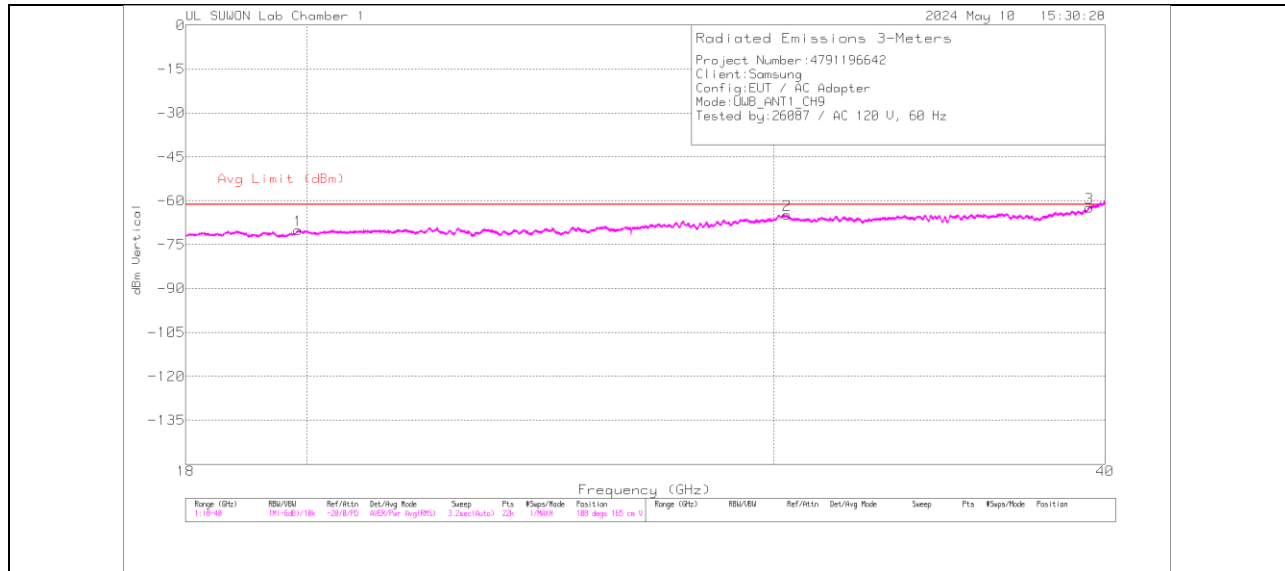


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz[dB]	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	19.84392	-88.73	RMS	6.3	16.2	11.8	-15.6	-70.03	-61.3	-8.73	108	165	V
2	30.34844	-95.22	RMS	13.4	20.8	11.8	-15.6	-64.82	-61.3	-3.52	72	165	V
3	39.44803	-94.33	RMS	12	23.7	11.8	-15.6	-62.43	-61.3	-1.13	216	165	V
4	19.85192	-89.13	RMS	6.3	16.1	11.8	-15.6	-70.53	-61.3	-9.23	288	165	H
5	30.28445	-95.53	RMS	13.4	20.7	11.8	-15.6	-65.23	-61.3	-3.93	36	165	H
6	39.44903	-94.27	RMS	12	23.7	11.8	-15.6	-62.37	-61.3	-1.07	216	165	H

RMS - RMS detection

### Zoom Scan

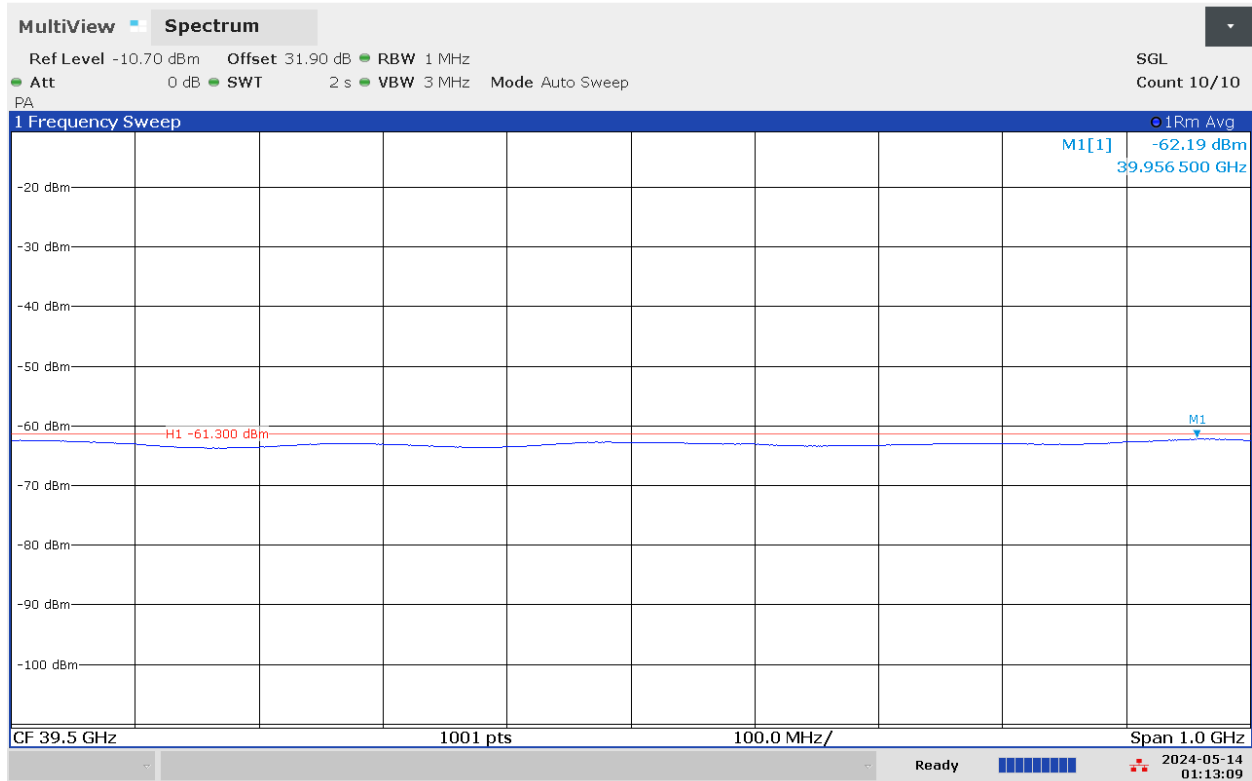

01:13:09 AM 05/14/2024




### 10.2.4. SPURIOUS EMISSION 1164 MHz – 1240 MHz


#### TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

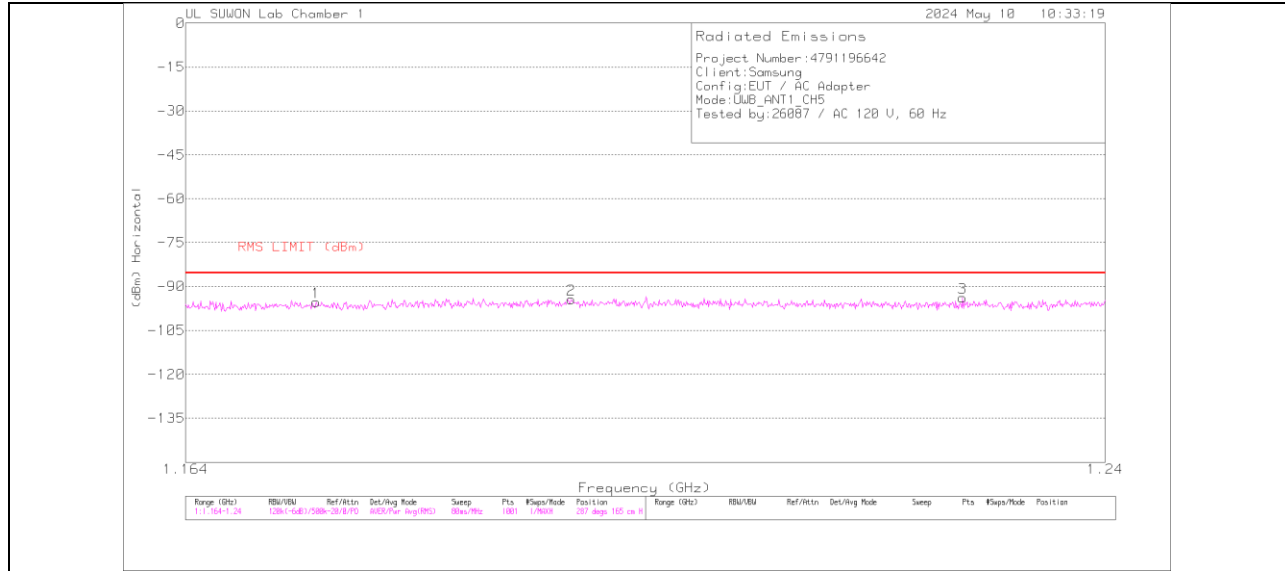

#### VERTICAL RESULT

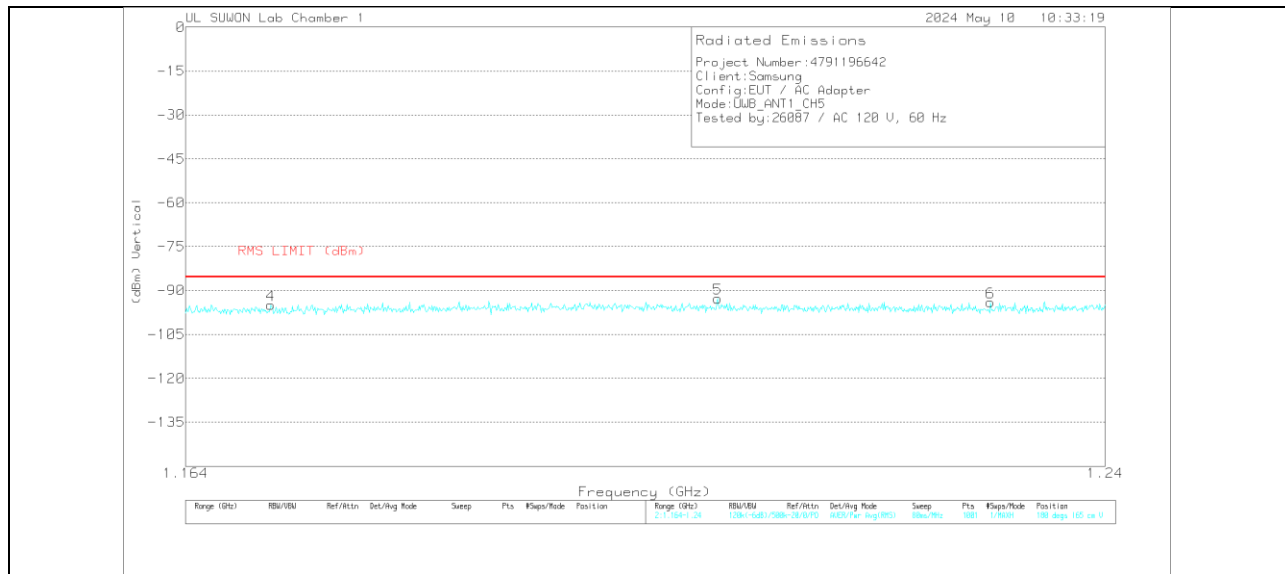


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.9618GHz(dB)	Det. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1.17449	-82.71	RMS	28.2	-37.5	-15.6	11.8	.6	-85.21	-85.3	-9.91	215	165	H
2	1.19531	-82	RMS	28.4	-37.5	-15.6	11.8	.6	-84.3	-85.3	-9	324	165	H
3	1.22792	-81.95	RMS	28.8	-37.5	-15.6	11.8	.6	-83.85	-85.3	-8.55	143	165	H
4	1.17084	-82.36	RMS	28.1	-37.5	-15.6	11.8	.6	-84.96	-85.3	-9.66	289	165	V
5	1.2074	-80.56	RMS	28.5	-37.5	-15.6	11.8	.6	-82.76	-85.3	-7.46	36	165	V
6	1.23027	-82.03	RMS	28.8	-37.5	-15.6	11.8	.6	-83.93	-85.3	-8.63	252	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

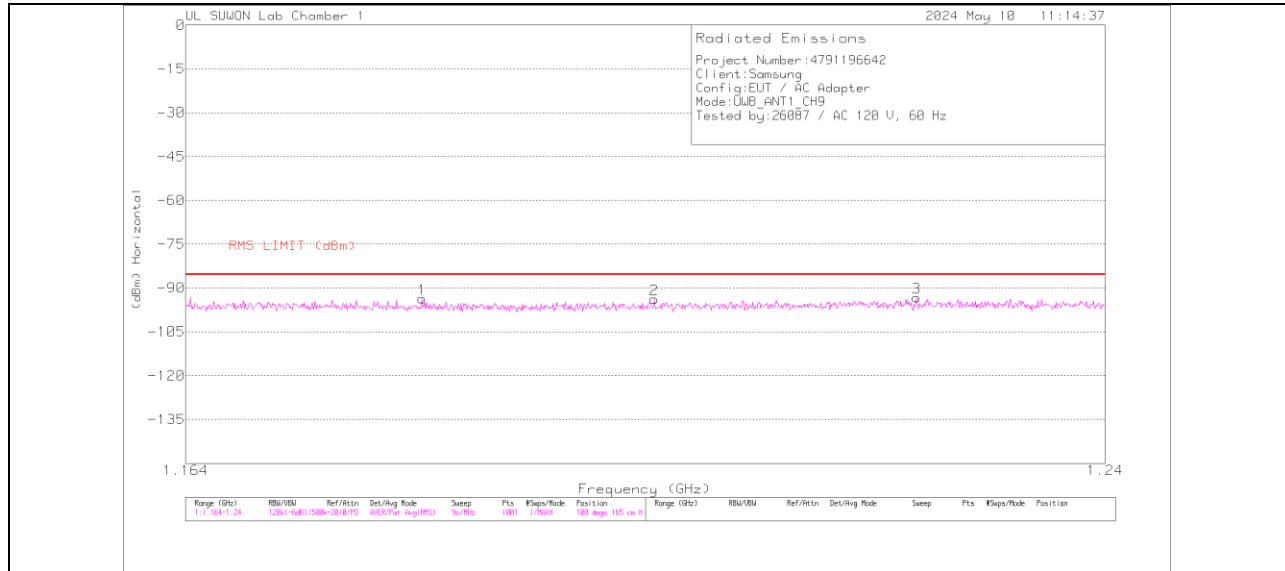

**VERTICAL RESULT**

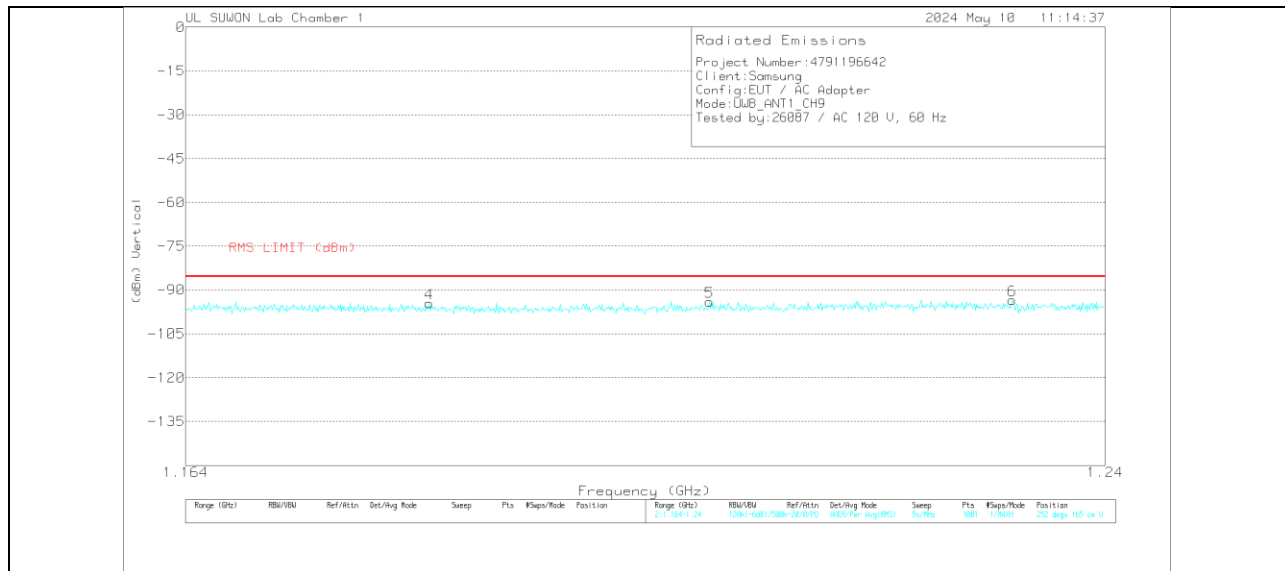

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.9618GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.18308	-81	RMS	28.2	-37.5	-15.6	11.8	.5	-93.6	-85.3	-8.3	36	165	H
2	1.20215	-81.33	RMS	28.4	-37.5	-15.6	11.8	.5	-93.73	-85.3	-8.43	36	165	H
3	1.22404	-81.09	RMS	28.7	-37.5	-15.6	11.8	.5	-93.19	-85.3	-7.89	360	165	H
4	1.18368	-82.07	RMS	28.3	-37.5	-15.6	11.8	.5	-94.57	-85.3	-9.27	252	165	V
5	1.20671	-81.7	RMS	28.5	-37.5	-15.6	11.8	.5	-94	-85.3	-8.7	216	165	V
6	1.2321	-81.47	RMS	28.8	-37.5	-15.6	11.8	.5	-93.47	-85.3	-8.17	0	165	V


RMS - RMS detection

### 10.2.5. SPURIOUS EMISSION 1559 MHz – 1610 MHz


#### TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

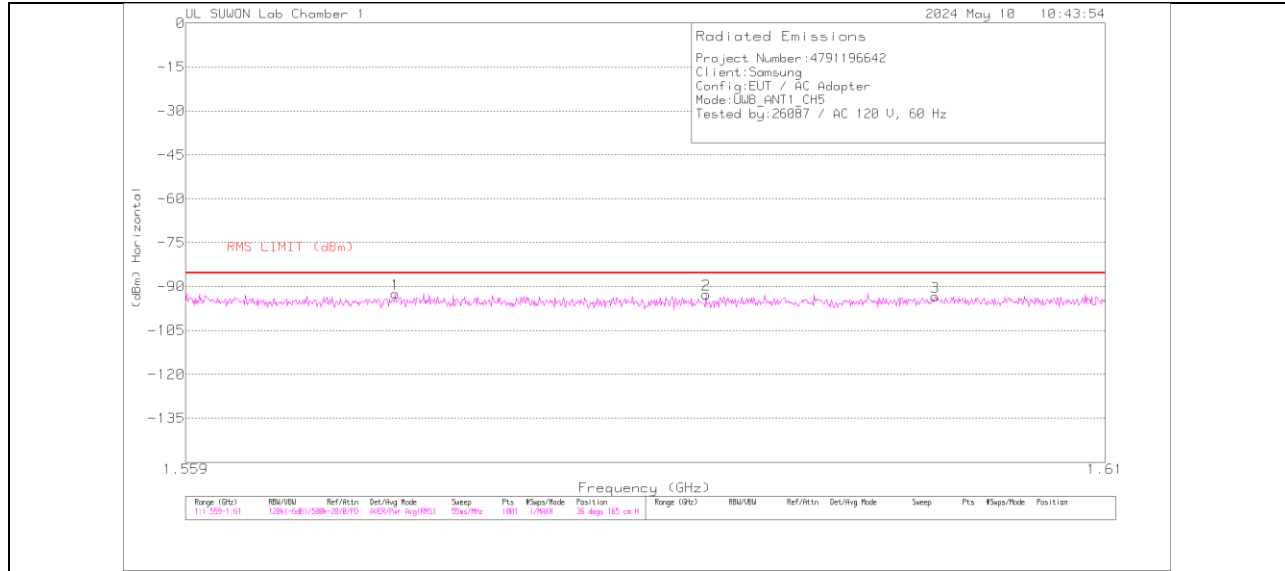

#### VERTICAL RESULT

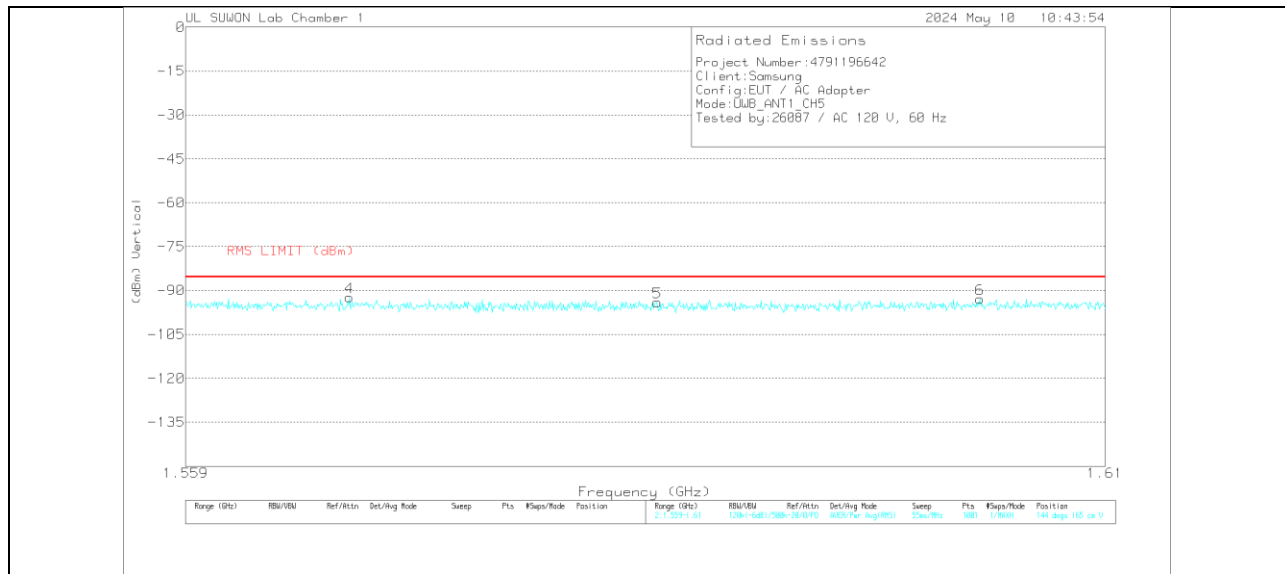


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Det. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	1.57048	-80.86	RMS	28.5	-36.9	-15.6	11.8	.6	-92.46	-85.3	-7.16	252	165	H
2	1.58766	-81.26	RMS	28.5	-36.9	-15.6	11.8	.7	-92.76	-85.3	-7.46	252	165	H
3	1.60046	-82.06	RMS	28.5	-36.8	-15.6	11.8	.7	-93.46	-85.3	-8.16	288	165	H
4	1.56798	-80.66	RMS	28.5	-36.9	-15.6	11.8	.6	-92.26	-85.3	-6.96	36	165	V
5	1.58496	-82.65	RMS	28.5	-36.8	-15.6	11.8	.7	-94.05	-85.3	-8.75	144	165	V
6	1.60296	-81.47	RMS	28.5	-36.8	-15.6	11.8	.7	-92.87	-85.3	-7.57	36	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

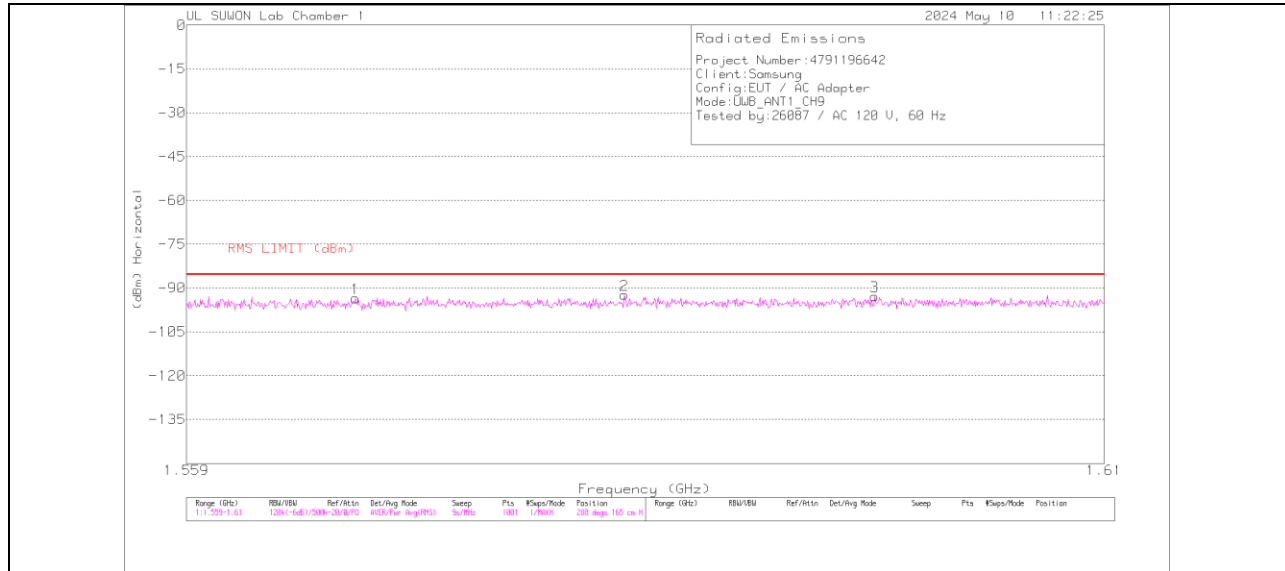

**VERTICAL RESULT**

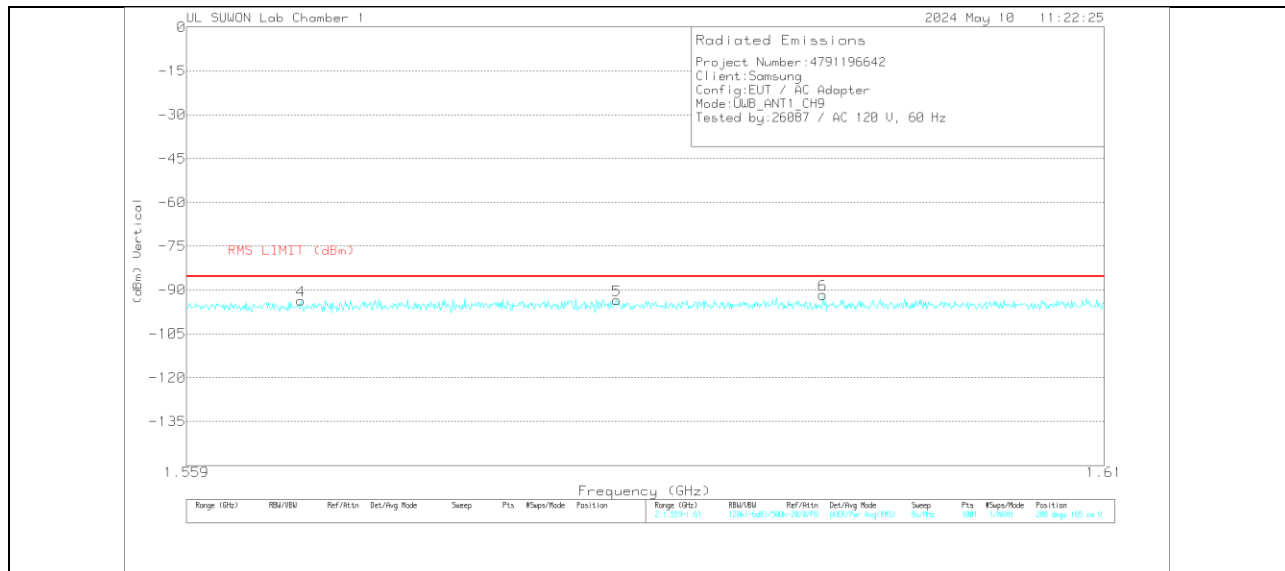


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.56828	-81.91	RMS	28.5	-36.9	-15.6	11.8	.6	-93.51	-85.3	-8.21	144	165	H
2	1.58312	-80.87	RMS	28.5	-36.9	-15.6	11.8	.7	-92.37	-85.3	-7.07	180	165	H
3	1.5971	-81.37	RMS	28.5	-36.8	-15.6	11.8	.7	-92.77	-85.3	-7.47	288	165	H
4	1.56527	-81.9	RMS	28.5	-37	-15.6	11.8	.6	-93.6	-85.3	-8.3	252	165	V
5	1.58272	-81.88	RMS	28.5	-36.9	-15.6	11.8	.7	-93.38	-85.3	-8.08	324	165	V
6	1.59419	-80.14	RMS	28.5	-36.9	-15.6	11.8	.7	-91.64	-85.3	-6.34	324	165	V


RMS - RMS detection

### 10.3. WORST CASE BELOW 1 GHZ

#### SPURIOUS EMISSIONS 30 TO 1000 MHZ

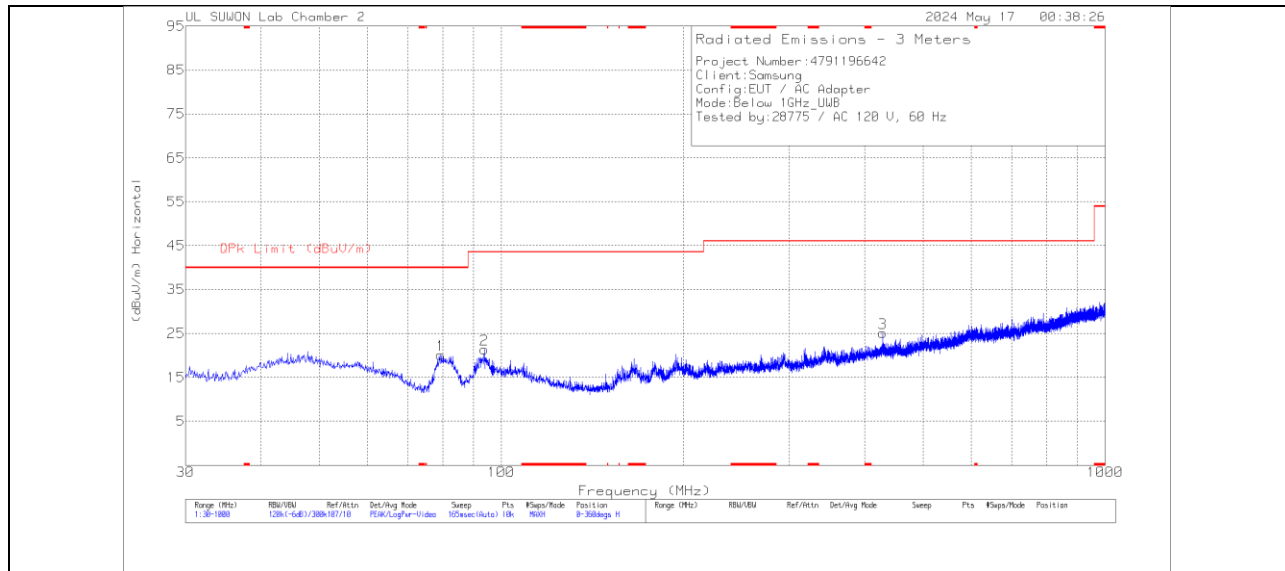

**HORIZONTAL**

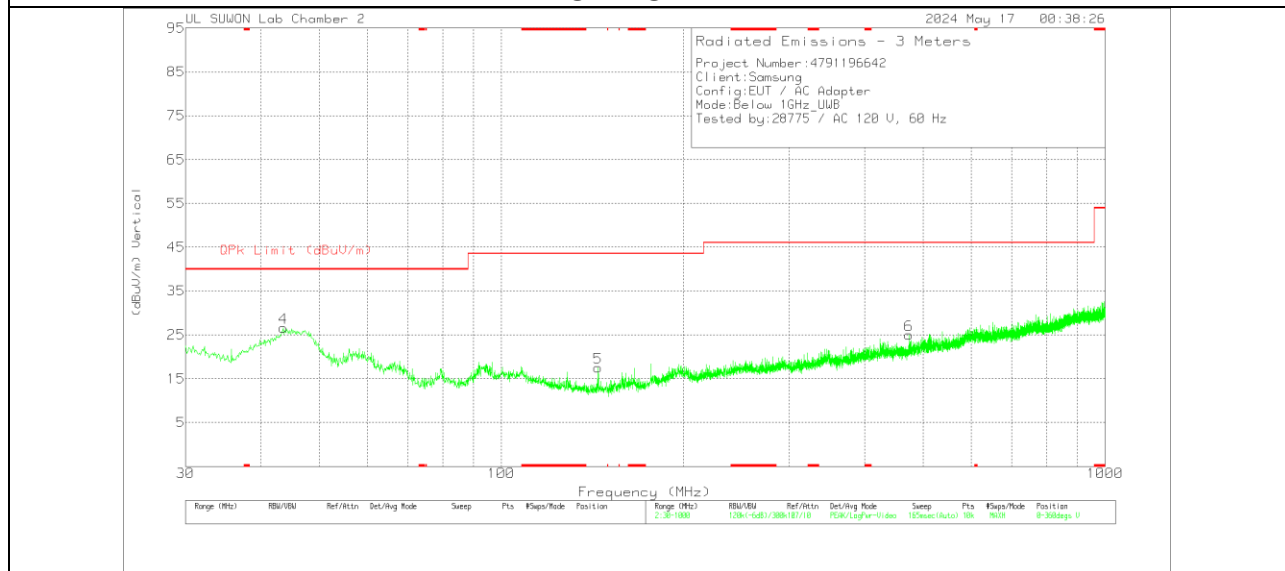

**VERTICAL**

#### Below 1GHz Data

##### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna_749_Fact or(dB)	Below_1G_Path Loss(dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	79.373	38.7	Pk	12.8	-31.4	20.1	40	-19.9	0-360	100	H
2	93.729	36.2	Pk	16.4	-31.2	21.4	43.52	-22.12	0-360	200	H
3	428.185	33.15	Pk	21.7	-29.7	25.15	46.02	-20.87	0-360	100	H
4	43.58	38.86	Pk	19.6	-31.8	26.66	40	-13.34	0-360	100	V
5	144.751	34.56	Pk	13.9	-30.9	17.56	43.52	-25.96	0-360	100	V
6	473.387	32.4	Pk	22.1	-29.5	25	46.02	-21.02	0-360	300	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency.

### RESULTS

AC Line test was performed worst case. (Highest Power)  
ANT1 / CH5 / SP0 / BPRF9 / Packet Length 4

11.1.1. AC Power Line

LINE 1 RESULTS

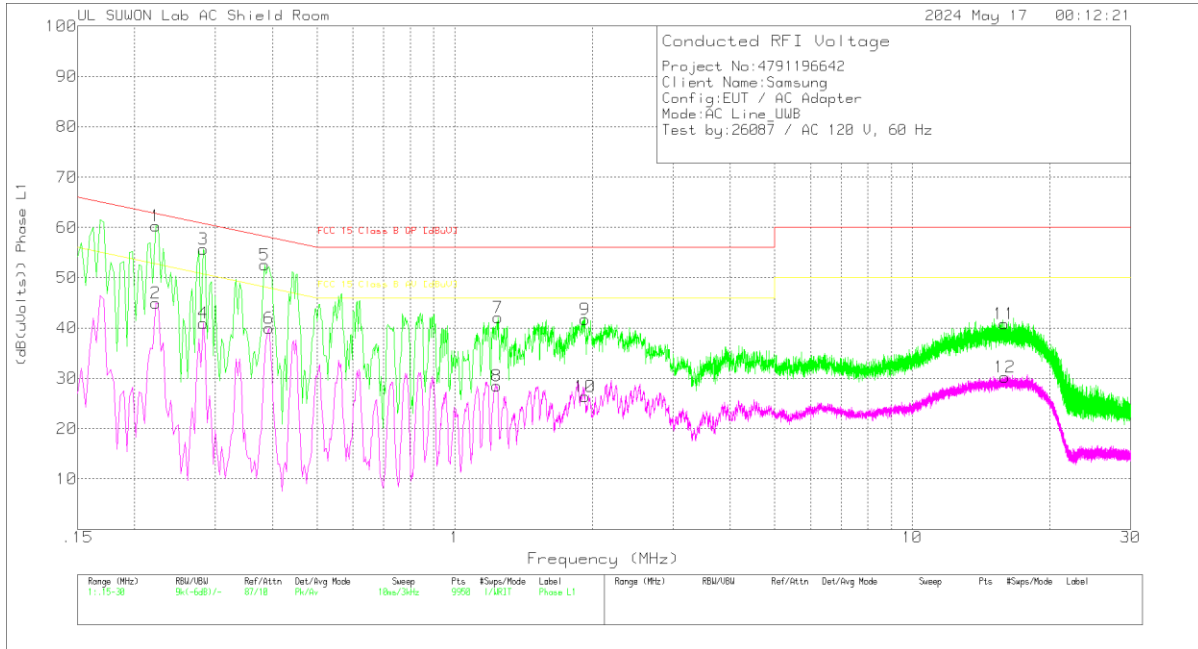

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1 [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.222	50.38	Pk	9.8	.1	60.28	62.74	-2.46	-	-
2	.222	35.06	Av	9.8	.1	44.96	-	-	52.74	-7.78
3	.282	45.92	Pk	9.7	.1	55.72	60.76	-5.04	-	-
4	.282	31.16	Av	9.7	.1	40.96	-	-	50.76	-9.8
5	.384	42.63	Pk	9.8	.1	52.53	58.19	-5.66	-	-
6	.393	30.05	Av	9.8	.1	39.95	-	-	48	-8.05
7	1.245	32.3	Pk	9.7	.1	42.1	56	-13.9	-	-
8	1.236	18.66	Av	9.7	.1	28.46	-	-	46	-17.54
9	1.926	31.93	Pk	9.7	.1	41.73	56	-14.27	-	-
10	1.929	16.61	Av	9.7	.1	26.41	-	-	46	-19.59
11	15.903	30.55	Pk	10	.3	40.85	60	-19.15	-	-
12	15.912	19.92	Av	10	.3	30.22	-	-	50	-19.78

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1 [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
.22275	47.26	Qp	9.8	.1	57.16	62.72	-5.56	-	-
.28275	42.15	Qp	9.7	.1	51.95	60.73	-8.78	-	-
.38475	35.09	Qp	9.8	.1	44.99	58.18	-13.19	-	-
.39225	40.32	Qp	9.8	.1	50.22	58.02	-7.8	-	-

Qp - Quasi-Peak detector

### LINE 2 RESULTS

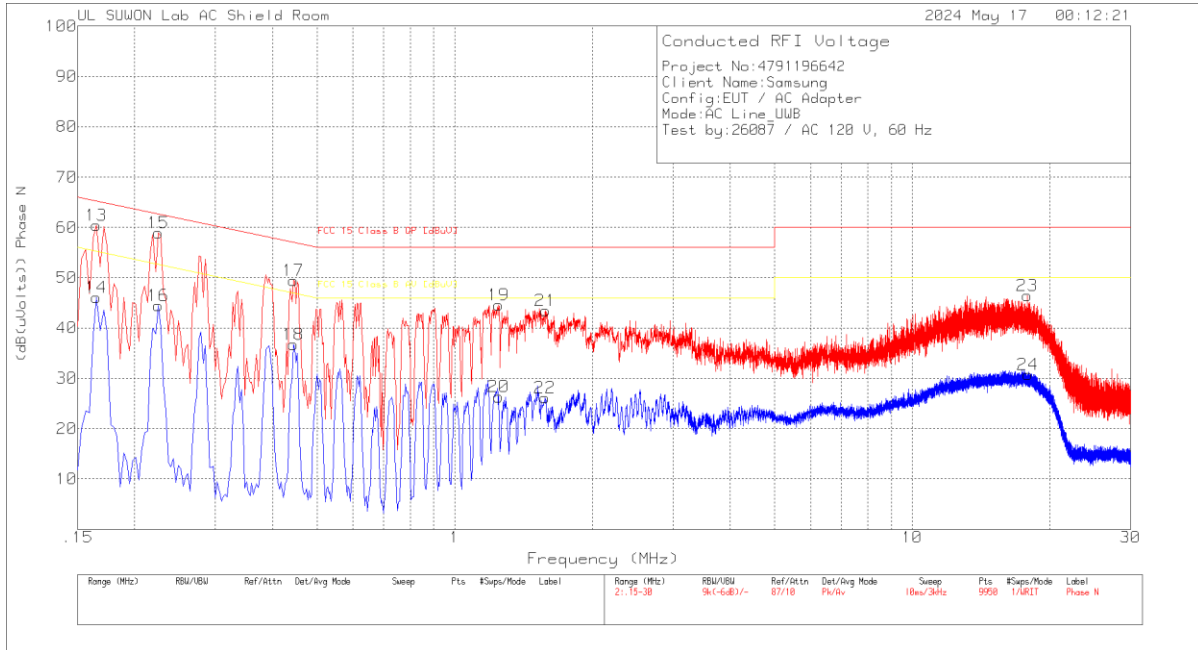

#### Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.165	50.4	Pk	9.9	.1	60.4	65.21	-4.81	-	-
14	.165	36.07	Av	9.9	.1	46.07	-	-	55.21	-9.14
15	.225	49.06	Pk	9.7	.1	58.86	62.63	-3.77	-	-
16	.225	34.65	Av	9.7	.1	44.45	-	-	52.63	-8.18
17	.444	39.57	Pk	9.8	.1	49.47	56.99	-7.52	-	-
18	.444	26.85	Av	9.8	.1	36.75	-	-	46.99	-10.24
19	1.248	34.79	Pk	9.7	.1	44.59	56	-11.41	-	-
20	1.248	16.52	Av	9.7	.1	26.32	-	-	46	-19.68
21	1.578	33.61	Pk	9.7	.1	43.41	56	-12.59	-	-
22	1.575	16.34	Av	9.7	.1	26.14	-	-	46	-19.86
23	17.859	35.9	Pk	10.2	.3	46.4	60	-13.6	-	-
24	17.877	20.23	Av	10.2	.3	30.73	-	-	50	-19.27

Pk - Peak detector  
 Av - Average detection

#### Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
.16575	47.35	Qp	9.9	.1	57.35	65.17	-7.82	-	-
.22575	46.71	Qp	9.7	.1	56.51	62.6	-6.09	-	-
.44475	36.33	Qp	9.8	.1	46.23	56.97	-10.74	-	-

Qp - Quasi-Peak detector

## END OF TEST REPORT