



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2013**

SAR EVALUATION REPORT

For
GSM Phone + Bluetooth & WLAN 2.4GHz b/g/n

**Model: SM-G310HN
FCC ID: A3LSMG310HN**

**Report Number: 14I17192-6B
Issue Date: 03/15/2014**

Prepared for
**Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu
Suwon-City, GyeonGggi-Do 443-742, South Korea**

Prepared by
**UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	03/12/2014	Initial Issue	--
A	03/14/2014	Report revised based on the Reviewer's comments: <ol style="list-style-type: none">Cover Page: Removed note and additional modelSec. 1: Updated Highest Reported SAR values and removed additional model.Sec. 7.2: Removed 802.11a from Duty Cycle.Sec. 12.1.: Corrected output power for GSM850.Sec. 15.8.: Added Calibration Certificate for D2450V2 – 899.Updated all applicable Sections to include Wi-Fi (SAR Testing performed) and BT SAR Data.	Roy Chen
B	03/15/2014	Report revised based on the Reviewer's comments: <ol style="list-style-type: none">Sec. nos. 7.3, 9.3, 12.4, and 14: Revised BT.	Roy Chen

Table of Contents

1. Attestation of Test Results 5

2. Test Methodology 6

3. Facilities and Accreditation 6

4. Calibration and Uncertainty 7

 4.1. *Measuring Instrument Calibration* 7

 4.2. *Measurement Uncertainty* 7

5. Measurement System Description and Setup 8

6. SAR Measurement Procedure 9

 6.1. *Normal SAR Measurement Procedure* 9

 6.2. *Volume Scan Procedures* 11

7. Device Under Test 12

 7.1. *General Information* 12

 7.2. *Wireless Technologies* 12

 7.3. *RF Output Power Tolerance* 13

 7.4. *Simultaneous Transmission Condition* 13

8. RF Exposure Conditions 14

 8.1. *Head Exposure Conditions* 14

 8.2. *Body-worn Accessory Exposure Conditions* 14

 8.3. *Hotspot Exposure Conditions and Wi-Fi Direct* 14

9. RF Output Power Measurement 15

 9.1. *GSM* 15

 9.2. *Wi-Fi (2.4 GHz Band)* 16

 9.3. *Bluetooth* 16

10. Tissue Dielectric Properties 17

 10.1. *Composition of Ingredients for the Tissue Material Used in the SAR Tests* 18

 10.2. *Tissue Dielectric Parameter Check Results* 19

11. System Performance Check 20

 11.1. *System Performance Check Measurement Conditions* 20

 11.2. *Reference SAR Values for System Performance Check* 21

 11.3. *System Performance Check Results* 21

12. SAR Test Results 22

12.1.	GSM850.....	23
12.2.	GSM1900.....	23
12.3.	Wi-Fi (DTS Band).....	24
12.4.	Bluetooth.....	25
12.4.1.	Standalone SAR Test Exclusion Considerations.....	25
12.4.2.	Estimated SAR.....	25
13.	SAR Measurement Variability	26
13.1.	<i>The Highest Measured SAR Configuration in Each Frequency Band.....</i>	<i>26</i>
13.2.	<i>Repeated Measurement Results.....</i>	<i>26</i>
14.	Simultaneous Transmission SAR Analysis	27
14.1.	<i>Sum of the SAR for GSM850 & Wi-Fi & BT</i>	<i>28</i>
14.2.	<i>Sum of the SAR for GSM1900 & Wi-Fi & BT</i>	<i>28</i>
15.	Appendixes	29
15.1.	<i>Photos and Antenna Locations</i>	<i>29</i>
15.2.	<i>System Performance Check Plots</i>	<i>29</i>
15.3.	<i>Highest SAR Test Plots.....</i>	<i>29</i>
15.4.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3686.....</i>	<i>29</i>
15.5.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3871.....</i>	<i>29</i>
15.6.	<i>Calibration Certificate for D835V2 - SN 4d117</i>	<i>29</i>
15.7.	<i>Calibration Certificate for D1900V2 - SN 5d140</i>	<i>29</i>
15.8.	<i>Calibration Certificate for D2450V2 - SN 899</i>	<i>29</i>

1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.			
DUT description	GSM Phone + Bluetooth & WLAN2.4GHz b/g/n			
Model	SM-G310HN			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	02/25/2014 and 03/13/2014 – 03/14/2014			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	0.556 W/kg	0.086 W/kg	N/A
	Body-worn Accessory	0.331 W/kg	0.025 W/kg	N/A
	Wireless Router (Hotspot)	0.405 W/kg	0.025 W/kg	N/A
	Simultaneous Transmission	0.642 W/kg	0.642 W/kg	N/A
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Std 1528-2013			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:

Prepared By:




Bobby Bayani
 WiSE Enginner
 UL Verification Services Inc.

Roy Chen
 WiSE Laboratory Technician
 UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	7/11/2014
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/10/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529162	9/19/2014

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3546A00784	3/26/2014
Power Meter	Agilent	N1912A	MY50001018	8/23/2014
Power Sensor	Agilent	E9323A	US40411556	8/9/2014
Power Sensor	Agilent	E9323A	MY53070009	4/3/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Directional coupler	Werlatone	C8060-102	2711	N/A
DC Power Supply	AMETEK	XT20-3	1318A00529	N/A
Synthesized Signal Generator	HP	8665B	3744A01084	5/7/2014
Power Meter	HP	437B	3125U12345	7/29/2014
Power Meter	HP	437B	3125U11364	8/26/2014
Power Sensor	HP	8481A	2702A76223	9/17/2014
Power Sensor	HP	8481A	1926A27048	7/29/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A
E-Field Probe	SPEAG	EX3DV4	3686	3/11/2014
E-Field Probe	SPEAG	EX3DV4	3871	7/29/2014
Data Acquisition Electronics	SPEAG	DAE4	1239	4/9/2014
Data Acquisition Electronics	SPEAG	DAE4	1259	3/11/2014
System Validation Dipole	SPEAG	D835V2	4d117	5/28/2014
System Validation Dipole	SPEAG	D1900V2	5d140	4/18/2014
System Validation Dipole	SPEAG	D2450V2	899	9/10/2014

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMU200	106301	7/3/2014
Base Station Simulator	R & S	CMW500	124595-SS	7/25/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

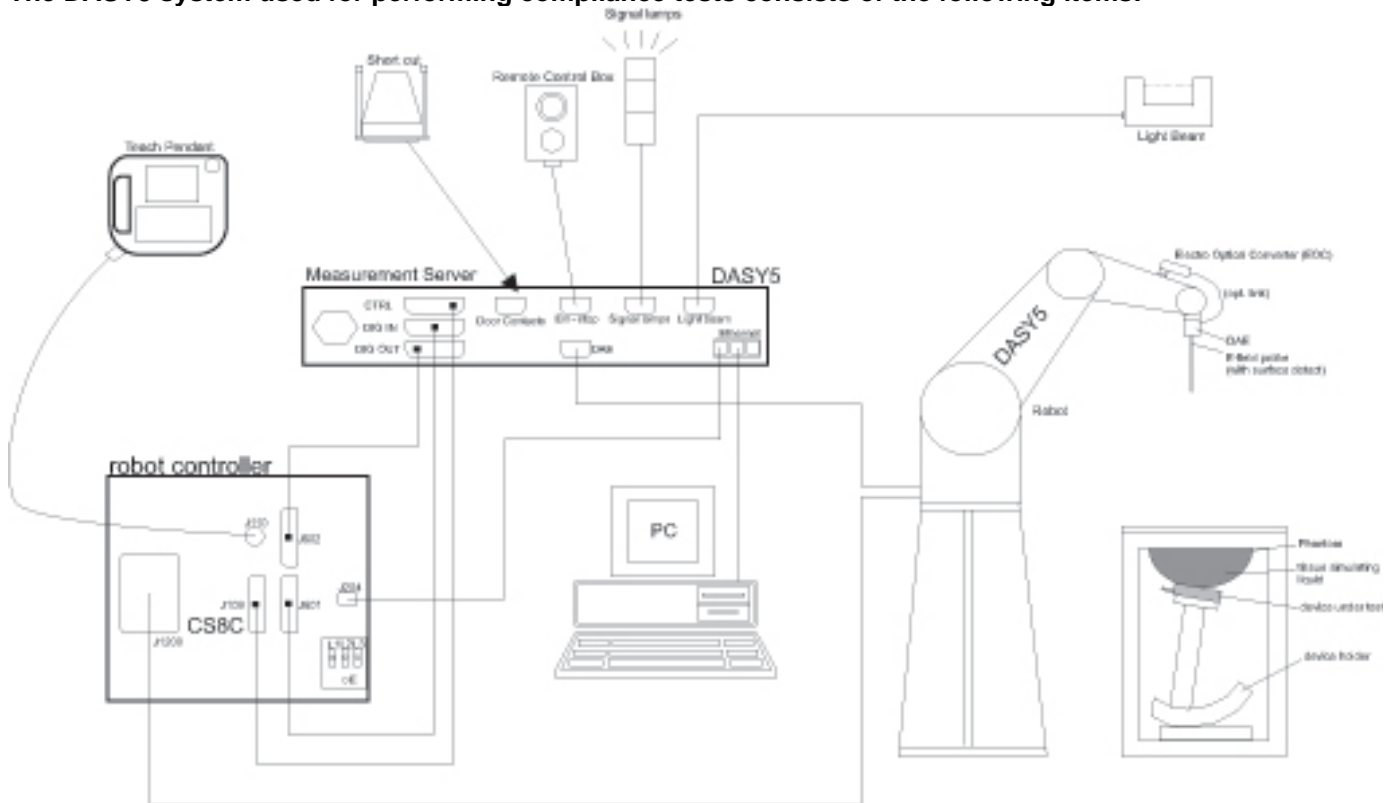

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi -enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)
Device dimension	Overall (Length x Width): 121 mm x 62.7mm Overall Diagonal: 122.5mm Display Diagonal: 100.7mm
Back Cover	<input type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover <input checked="" type="checkbox"/> Normal Battery Cover with NFC
Accessory	<input checked="" type="checkbox"/> Headset
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8Vdc, 5.70Wh <input type="checkbox"/> Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850 / 1900 Wi-Fi : 2.4 GHz Bluetooth: 2.4 GHz.
Mode	GSM - <input checked="" type="checkbox"/> Voice (GMSK) - <input checked="" type="checkbox"/> GPRS (GMSK) Wi-Fi 2.4GHz (802.11b/g/n) - <input checked="" type="checkbox"/> 802.11b - <input checked="" type="checkbox"/> 802.11g - <input checked="" type="checkbox"/> 802.11n (HT20) Bluetooth Ver. 4.0 (LE)
Duty Cycle	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, Wi-Fi 802.11b/g/n: 100%
GPRS Multi-Slot Class	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input checked="" type="checkbox"/> Class 33 - Four Up
DTM (Dual Transfer Mode)	<input type="checkbox"/> Supported
VoIP (GPRS)	<input checked="" type="checkbox"/> Supported
SV-LTE & SV-DO	<input type="checkbox"/> Supported

7.3. RF Output Power Tolerance

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface		Target				Max. tune-up tolerance limit			
Mode	1 Slot	2 Slot	3 Slot	4 Slot	1 Slot	2 Slot	3 Slot	4 Slot	
GSM850	Voice	32.0				32.5			
	GPRS	32.0	29.0	28.0	26.0	32.5	29.5	28.5	26.5
GSM1900	Voice	29.0				29.5			
	GPRS	29.0	26.0	25.0	23.0	29.5	26.5	25.5	23.5

Upper limit (dB): 0.5		RF Output Power (dBm)		
RF Air interface	Mode	Target		Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	16.0		16.5
	802.11g	12.0		12.5
	802.11n HT20	11.0		11.5

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Target	Max. tune-up tolerance limit	
Bluetooth	12.0	12.5	
Bluetooth (LE)	8.0	8.5	

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	<ol style="list-style-type: none"> GSM 850/1900 Voice + Wi-Fi 2.4GHz GSM 850/1900 (GPRS) + Wi-Fi 2.4GHz (VoIP)
Body-worn Accessory	<ol style="list-style-type: none"> GSM 850/1900 Voice + Wi-Fi 2.4GHz GSM 850/1900 Voice + BT GSM 850/1900 (GPRS) + Wi-Fi 2.4GHz (VoIP) GSM 850/1900 (GPRS) + BT(VoIP)
Wireless Router (Hotspot) & Wi-Fi Direct	<ol style="list-style-type: none"> GSM 850/1900 (GPRS) + Wi-Fi 2.4GHz

Notes:

- Wi-Fi 2.4GHz supports Hotspot and Wi-Fi Direct.
- GPRS support Hotspot.
- VoIP is supported in GPRS.
- Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.

8. RF Exposure Conditions

Refer to Appendix “Antenna Locations and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

For WWAN and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

8.3. Hotspot Exposure Conditions and Wi-Fi Direct

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	104 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	4.8 mm	Yes	
Edge 3 (Bottom)	1 mm	Yes	
Edge 4 (Left)	5 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	14 mm	Yes	
Edge 2 (Right)	55 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR
Edge 3 (Bottom)	81 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR
Edge 4 (Left)	1.5 mm	Yes	

9. RF Output Power Measurement

9.1. GSM

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	32.0
	190	836.6	32.0
	251	848.8	32.0

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Burst Power (dBm)				Frame Power (dBm)			
			1 slot	2 slots	3slots	4 slots	1 slot	2 slots	3slots	4 slots
850	128	824.2	32.0	29.0	28.0	25.9	23.0	23.0	23.7	22.9
	190	836.6	32.0	29.0	27.9	25.9	23.0	23.0	23.6	22.9
	251	848.8	32.0	29.0	27.9	25.9	23.0	23.0	23.6	22.9

EGPRS (8PSK) - Coding Scheme: MCS5

This mode is Rx only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	28.9
	661	1880.0	29.0
	810	1909.8	29.0

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Burst Power (dBm)				Frame Power (dBm)			
			1 slot	2 slots	3slots	4 slots	1 slot	2 slots	3slots	4 slots
1900	512	1850.2	28.9	25.8	24.8	22.8	19.9	19.8	20.5	19.8
	661	1880.0	29.0	26.0	24.9	23.0	20.0	20.0	20.6	20.0
	810	1909.8	29.0	26.1	25.1	23.3	20.0	20.1	20.8	20.3

EGPRS (8PSK) - Coding Scheme: MCS5

This mode is Rx only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above

9.2. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	∇
		2.437	6	√	∇
		2.462	11 [#]	√	∇

Notes:

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR test (Yes/No)
2.4 (DTS)	802.11b	1	2412	16.3	Yes
		6	2437	16.3	
		11	2462	16.3	
	802.11g	1	2412	12.1	No
		6	2437	12.1	
		11	2462	12.1	
	802.11n (HT20)	1	2412	10.7	No
		6	2437	10.8	
		11	2462	10.8	

Note(s):

- Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	16.3	Yes
			2 Mbps	16.2	No
			5.5 Mbps	16.2	No
			11 Mbps	15.9	No

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

9.3. Bluetooth

Maximum tune-up tolerance limit is 12.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Std 1528-2013

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1500	40.4	1.23
1640	40.2	1.31
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48

NOTE—For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab A

	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2/25/2014	Head 1900	e'	41.3200	Relative Permittivity (ϵ_r):	41.32	40.00	3.30	5
		e"	13.3100	Conductivity (σ):	1.41	1.40	0.44	5
	Head 1850	e'	41.4900	Relative Permittivity (ϵ_r):	41.49	40.00	3.73	5
		e"	13.2200	Conductivity (σ):	1.36	1.40	-2.87	5
	Head 1910	e'	41.2900	Relative Permittivity (ϵ_r):	41.29	40.00	3.23	5
		e"	13.3400	Conductivity (σ):	1.42	1.40	1.20	5
2/25/2014	Body 1900	e'	53.7400	Relative Permittivity (ϵ_r):	53.74	53.30	0.83	5
		e"	14.3700	Conductivity (σ):	1.52	1.52	-0.12	5
	Body 1850	e'	53.8800	Relative Permittivity (ϵ_r):	53.88	53.30	1.09	5
		e"	14.2900	Conductivity (σ):	1.47	1.52	-3.29	5
	Body 1910	e'	53.7100	Relative Permittivity (ϵ_r):	53.71	53.30	0.77	5
		e"	14.4300	Conductivity (σ):	1.53	1.52	0.82	5
3/13/2014	Head 2450	e'	39.9100	Relative Permittivity (ϵ_r):	39.91	39.20	1.81	5
		e"	13.6100	Conductivity (σ):	1.85	1.80	3.00	5
	Head 2410	e'	40.0900	Relative Permittivity (ϵ_r):	40.09	39.28	2.06	5
		e"	13.4900	Conductivity (σ):	1.81	1.76	2.69	5
	Head 2475	e'	39.8000	Relative Permittivity (ϵ_r):	39.80	39.17	1.61	5
		e"	13.6700	Conductivity (σ):	1.88	1.83	2.97	5
3/13/2014	Body 2450	e'	54.1100	Relative Permittivity (ϵ_r):	54.11	52.70	2.68	5
		e"	14.7000	Conductivity (σ):	2.00	1.95	2.69	5
	Body 2410	e'	54.2600	Relative Permittivity (ϵ_r):	54.26	52.76	2.84	5
		e"	14.5500	Conductivity (σ):	1.95	1.91	2.22	5
	Body 2475	e'	54.0300	Relative Permittivity (ϵ_r):	54.03	52.67	2.59	5
		e"	14.8000	Conductivity (σ):	2.04	1.99	2.60	5

SAR Lab D

	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2/25/2014	Head 835	e'	39.8500	Relative Permittivity (ϵ_r):	39.85	41.50	-3.98	5
		e"	19.3000	Conductivity (σ):	0.90	0.90	-0.44	5
	Head 820	e'	40.0600	Relative Permittivity (ϵ_r):	40.06	41.60	-3.71	5
		e"	19.3300	Conductivity (σ):	0.88	0.90	-1.91	5
	Head 850	e'	39.6500	Relative Permittivity (ϵ_r):	39.65	41.50	-4.46	5
		e"	19.2800	Conductivity (σ):	0.91	0.92	-0.41	5
2/25/2014	Body 835	e'	54.5300	Relative Permittivity (ϵ_r):	54.53	55.20	-1.21	5
		e"	21.6500	Conductivity (σ):	1.01	0.97	3.63	5
	Body 820	e'	54.7100	Relative Permittivity (ϵ_r):	54.71	55.28	-1.03	5
		e"	21.7100	Conductivity (σ):	0.99	0.97	2.21	5
	Body 850	e'	54.3900	Relative Permittivity (ϵ_r):	54.39	55.16	-1.39	5
		e"	21.5900	Conductivity (σ):	1.02	0.99	3.37	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d117	05/28/2013	835	1g	9.54	9.40
				10g	6.21	6.16
D1900V2	5d140	4/18/2013	1900	1g	41.2	41.5
				10g	21.5	22.0
D2450V2	899	9/10/2013	1900	1g	51.3	49.7
				10g	23.9	23.3

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab A

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio ±3 %	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
2/25/2014	D1900V2	5d140	Head	1g	4.01	4.08	40.8	41.2	-0.97	-1.75	1,2
				10g	2.07	2.18	21.8	21.5	1.40		
2/25/2014	D1900V2	5d140	Body	1g	4.12	4.11	41.1	41.5	-0.96	0.24	
				10g	2.06	2.14	21.4	22.0	-2.73		
3/13/2014	D2450V2	899	Body	1g	4.89	4.86	48.6	49.7	-2.21	0.61	3,4
				10g	2.12	2.25	22.5	23.3	-3.43		
3/13/2014	D2450V2	899	Head	1g	5.01	4.96	49.6	51.3	-3.31	1.00	
				10g	2.15	2.28	22.8	23.9	-4.60		

SAR Lab D

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio ±3 %	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
2/25/2014	D835V2	4d117	Head	1g	1.020	0.992	9.9	9.54	3.98	2.75	5,6
				10g	0.683	0.647	6.5	6.21	4.19		
2/25/2014	D835V2	4d117	Body	1g	0.964	0.947	9.5	9.40	0.74	1.76	
				10g	0.647	0.622	6.2	6.16	0.97		

12. SAR Test Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	32.5	32.0	0.120	0.135	
		0	Left Tilt	190	836.6	32.5	32.0	0.073	0.082	
		0	Right Touch	190	836.6	32.5	32.0	0.123	0.138	
		0	Right Tilt	190	836.6	32.5	32.0	0.081	0.091	
Head VoIP	GPRS 3 Slots	0	Left Touch	190	836.6	28.5	27.9	0.139	0.160	
		0	Left Tilt	190	836.6	28.5	27.9	0.087	0.100	
		0	Right Touch	190	836.6	28.5	27.9	0.142	0.163	1
		0	Right Tilt	190	836.6	28.5	27.9	0.092	0.106	
Body-worn accessory	Voice	10	Rear	190	836.6	32.5	32.0	0.192	0.215	2
		10	Front	190	836.6	32.5	32.0	0.147	0.165	
Hotspot	GPRS 3 Slots	10	Rear	190	836.6	28.5	27.9	0.242	0.278	3
		10	Front	190	836.6	28.5	27.9	0.187	0.215	
		10	Edge 2	190	836.6	28.5	27.9	0.096	0.110	
		10	Edge 3	190	836.6	28.5	27.9	0.019	0.022	
		10	Edge 4	190	836.6	28.5	27.9	0.112	0.129	

12.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	29.5	29.0	0.237	0.266	
		0	Left Tilt	661	1880.0	29.5	29.0	0.171	0.192	
		0	Right Touch	661	1880.0	29.5	29.0	0.406	0.456	
		0	Right Tilt	661	1880.0	29.5	29.0	0.136	0.153	
Head VoIP	GPRS 3 Slots	0	Left Touch	661	1880.0	25.5	24.9	0.275	0.316	
		0	Left Tilt	661	1880.0	25.5	24.9	0.186	0.214	
		0	Right Touch	661	1880.0	25.5	24.9	0.484	0.556	4
		0	Right Tilt	661	1880.0	25.5	24.9	0.162	0.186	
Body-worn accessory	Voice	10	Rear	661	1880.0	29.5	29.0	0.295	0.331	5
		10	Front	661	1880.0	29.5	29.0	0.281	0.315	
Hotspot	GPRS 3 Slots	10	Rear	661	1880.0	25.5	24.9	0.259	0.297	
		10	Front	661	1880.0	25.5	24.9	0.353	0.405	6
		10	Edge 2	661	1880.0	25.5	24.9	0.132	0.152	
		10	Edge 3	661	1880.0	25.5	24.9	0.118	0.135	
		10	Edge 4	661	1880.0	25.5	24.9	0.047	0.054	

12.3. Wi-Fi (DTS Band)

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	802.11b	0	6	2437	16.5	16.3	0.050	0.053	
	Left Tilt	802.11b	0	6	2437	16.5	16.3	0.047	0.050	
	Right Touch	802.11b	0	6	2437	16.5	16.3	0.081	0.086	7
	Righttt Tilt	802.11b	0	6	2437	16.5	16.3	0.046	0.049	
Body & Hotspot	Rear	802.11b	10	6	2437	16.5	16.3	0.023	0.024	
	Front	802.11b	10	6	2437	16.5	16.3	0.024	0.025	8
Hotspot	Edge 1	802.11b	10	6	2437	16.5	16.3	0.021	0.022	
	Edge 4	802.11b	10	6	2437	16.5	16.3	0.008	0.008	

12.4. Bluetooth

12.4.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
12.5	18	10	2.480	2.8

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.4.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	18	10	2.480	0.378

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Not Applicable.

13.2. Repeated Measurement Results

Head Exposure Condition

Not Applicable.

Body-worn Accessory Exposure Condition

Not Applicable.

Hotspot Mode Exposure Conditions

Not Applicable.

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured for both antennas in the pair, it is determined by the actual x, y, and z coordinates in the 1-g SAR for each SAR Peak Location; based on the extrapolated and interpolated result in the zoom scan measurement using the formula:

$$[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$$

A new threshold of 0.04 is also introduced in the KDB 447498. Thus, in order for a pair of simultaneously transmitting antennas, with the sum of 1-g SAR > 1.6 W/kg, to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			GSM 850	Wi-Fi DTS Bands	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.160	0.053		0.213	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.100	0.050		0.150	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.163	0.086		0.249	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.106	0.049		0.154	No
Body-worn Accessory & Hotspot	Rear	WWAN + Wi-Fi(DTS)	0.278	0.024		0.302	No
		WWAN + BT	0.278		0.378	0.656	No
	Front	WWAN + Wi-Fi(DTS)	0.215	0.025		0.240	No
		WWAN + BT	0.215		0.378	0.593	No
Hotspot	Edge 1	WWAN + Wi-Fi(DTS)	0.000	0.022		0.022	No
	Edge 2	WWAN + Wi-Fi(DTS)	0.110	0.000		0.110	No
	Edge 3	WWAN + Wi-Fi(DTS)	0.022	0.000		0.022	No
	Edge 4	WWAN + Wi-Fi(DTS)	0.129	0.008		0.137	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			GSM 1900	Wi-Fi DTS Bands	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.316	0.053		0.369	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.214	0.050		0.263	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.556	0.086		0.642	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.186	0.049		0.235	No
Body-worn Accessory & Hotspot	Rear	WWAN + Wi-Fi(DTS)	0.331	0.024		0.355	No
		WWAN + BT	0.331		0.378	0.709	No
	Front	WWAN + Wi-Fi(DTS)	0.405	0.025		0.430	No
		WWAN + BT	0.405		0.378	0.783	No
Hotspot	Edge 1	WWAN + Wi-Fi(DTS)	0.000	0.022		0.022	No
	Edge 2	WWAN + Wi-Fi(DTS)	0.152	0.000		0.152	No
	Edge 3	WWAN + Wi-Fi(DTS)	0.135	0.000		0.135	No
	Edge 4	WWAN + Wi-Fi(DTS)	0.054	0.008		0.062	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations**
- 15.2. System Performance Check Plots**
- 15.3. Highest SAR Test Plots**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3686**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3871**
- 15.6. Calibration Certificate for D835V2 - SN 4d117**
- 15.7. Calibration Certificate for D1900V2 - SN 5d140**
- 15.8. Calibration Certificate for D2450V2 - SN 899**

END OF REPORT