



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E**

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G355H/DS, SM-G355H

FCC ID: A3LSMG355H

REPORT NUMBER: 14I17666-1 Revision A

ISSUE DATE: May 12, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

Revision History

Rev.	Date	Revisions	Revised By
--	4/29/14	Initial issue	P. Zhang
A	5/12/14	Remove duplicated pages	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS5

2. TEST METHODOLOGY6

3. FACILITIES AND ACCREDITATION6

4. CALIBRATION AND UNCERTAINTY6

 4.1. *MEASURING INSTRUMENT CALIBRATION* 6

 4.2. *SAMPLE CALCULATION*..... 6

 4.3. *MEASUREMENT UNCERTAINTY* 6

5. EQUIPMENT UNDER TEST7

 5.1. *DESCRIPTION OF EUT*..... 7

 5.2. *MAXIMUM OUTPUT POWER*..... 7

 5.3. *DESCRIPTION OF AVAILABLE ANTENNAS* 8

 5.4. *DESCRIPTION OF TEST SETUP* 9

6. TEST AND MEASUREMENT EQUIPMENT 12

7. Summary Table 13

8. RF POWER OUTPUT VERIFICATION..... 14

 8.1. *GSM/GPRS/EDGE*..... 14

 8.1.1. *GSM OUTPUT POWER RESULT*..... 15

 8.2. *UMTS REL 99* 16

 8.2.1. *UMTS REL 99 OUTPUT POWER RESULT*..... 16

 8.3. *UMTS HSDPA*..... 17

 8.3.1. *UMTS HSDPA OUTPUT POWER RESULT* 17

 8.3.2. *UMTS HSUPA*..... 18

 8.3.3. *UMTS HSUPA OUTPUT POWER RESULT* 19

9. PEAK TO AVERAGE RATIO20

 9.1. *CONDUCTED PEAK TO AVERAGE RESULT*20

10. LIMITS AND CONDUCTED RESULTS22

 10.1. *OCCUPIED BANDWIDTH*22

 10.1.1. *OCCUPIED BANDWIDTH RESULTS*23

 10.1.1. *OCCUPIED BANDWIDTH PLOTS*24

 10.2. *BAND EDGE EMISSIONS*.....26

 10.2.1. *BAND EDGE PLOTS*.....27

10.3.	<i>OUT OF BAND EMISSIONS</i>	29
10.3.1.	OUT OF BAND EMISSIONS RESULT	31
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	32
10.4.	<i>FREQUENCY STABILITY</i>	34
10.4.1.	FREQUENCY STABILITY RESULTS.....	35
11.	RADIATED TEST RESULTS	37
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	37
11.1.1.	ERP/EIRP Results	38
11.1.2.	ERP/EIRP PLOTS	39
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	43
11.2.1.	SPURIOUS RADIATION DATA.....	44
12.	SETUP PHOTOS	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL: SM-G355H/DS, SM-G355H

SERIAL NUMBER: FL-164-C (Radiated)

DATE TESTED: April 25 – 29, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ul.com>

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$
$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$
$$(\text{Path loss} = \text{Signal generator output} - \text{PSA reading with substitution antenna})$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
GSM850	824~849	GMSK	32.2	1659.59		
	824~849	GPRS	32.2	1659.59	24.601	288.47
GSM1900	1850~1910	GMSK	29.3	851.14		
	1850~1910	GPRS	29.3	851.14	27.64	580.76

FCC Part 2 4						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 2	1850~1910	REL99	22.9	194.98	19.50	89.13
	1850~1910	HSDPA	22.6	181.97	19.41	87.30
	1850~1910	HSUPA	21.6	144.54		

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-3.094
Band 2, 1850~1910MHz	3.8

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	G355H	N/A	N/A
Earphone	Samsung	G355H	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

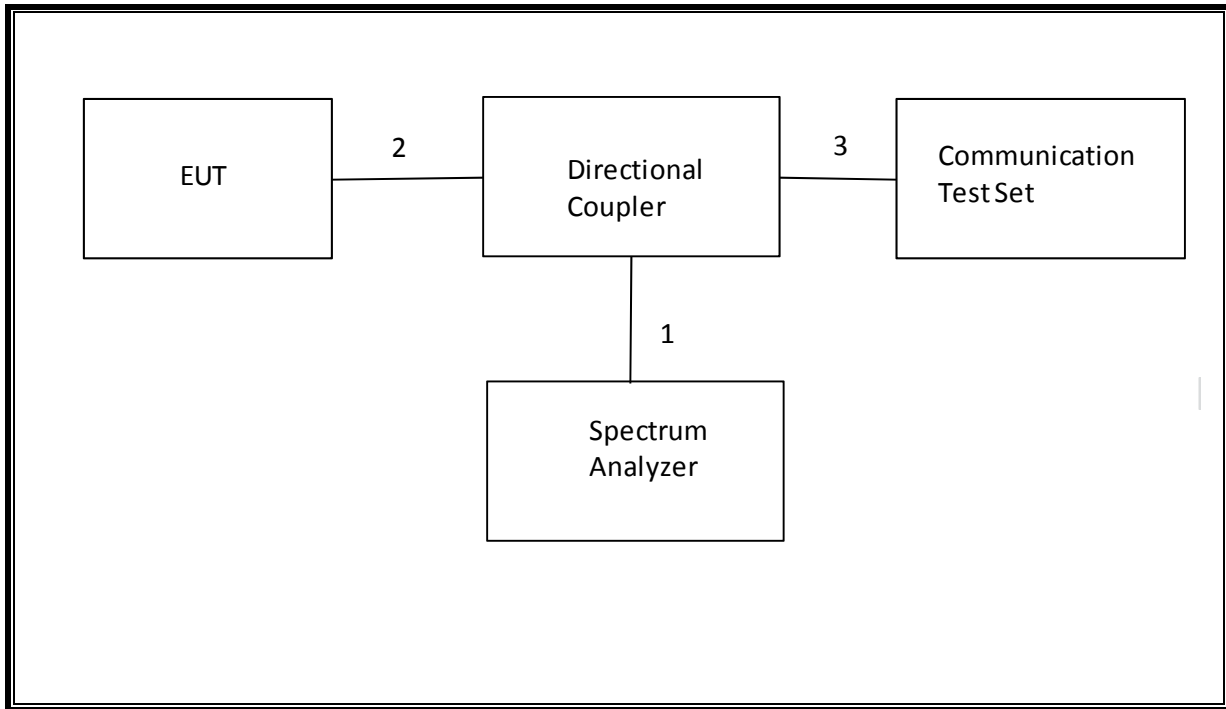

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

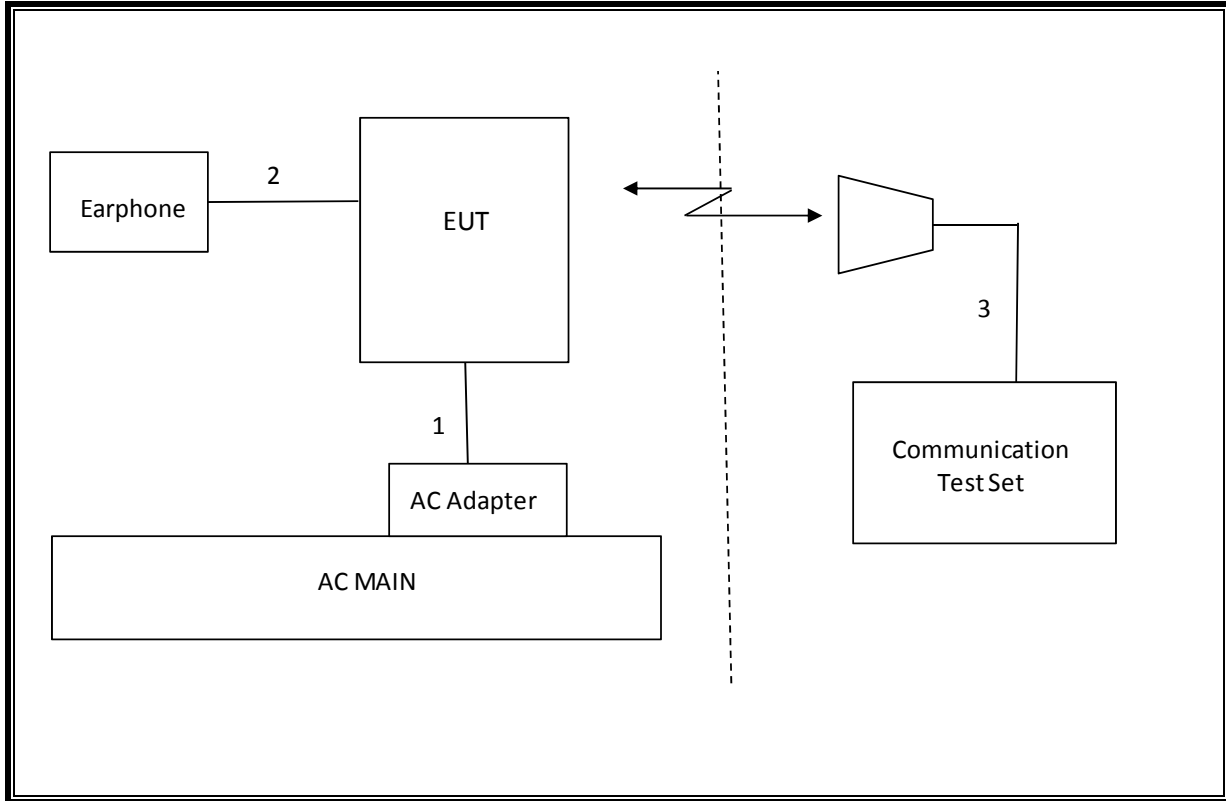

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/14
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	4.1MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-21.86dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.2dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.012PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	24.601dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	27.64dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-37.2dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	32.2			
		190	836.6	32.2			
		251	848.8	32.2			
	GPRS	128	824.2	32.2	31.0	28.5	26.5
		190	836.6	32.2	31.0	28.6	26.6
		251	848.8	32.2	31.0	28.6	26.6
GSM1900	GMSK	512	1850.2	29.3			
		661	1880	29.3			
		810	1909.8	29.2			
	GPRS	512	1850.2	29.3	27.4	25.8	23.8
		661	1880	29.3	27.3	25.7	23.7
		810	1909.8	29.2	27.2	25.6	23.5

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 2	REL99	9262	1852.4	22.9
		9400	1880	22.8
		9538	1907.6	22.7

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 2	HSDPA	1	9262	1852.4	22.4
			9400	1880	22.4
			9538	1907.6	22.5
		2	9262	1852.4	22.6
			9400	1880	22.4
			9538	1907.6	22.1
		3	9262	1852.4	22.5
			9400	1880	22.4
			9538	1907.6	22.1
		4	9262	1852.4	22.3
			9400	1880	22.2
			9538	1907.6	22.0

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
β_c/β_d	11/15	6/15	15/9	2/15	15/15	
Bhs	22/15	12/15	30/15	4/15	30/15	
β_{ed} (note1)	1309/225	94/75	47/15 47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 2	HSUPA	1	9262	1852.4	21.3
			9400	1880	21.3
			9538	1907.6	21.6
		2	9262	1852.4	19.5
			9400	1880	19.4
			9538	1907.6	19.7
		3	9262	1852.4	20.8
			9400	1880	20.6
			9538	1907.6	21.0
		4	9262	1852.4	20.4
			9400	1880	20.2
			9538	1907.6	20.5
		5	9262	1852.4	21.3
			9400	1880	21.6
			9538	1907.6	21.4

9. PEAK TO AVERAGE RATIO



Test Procedure


Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT
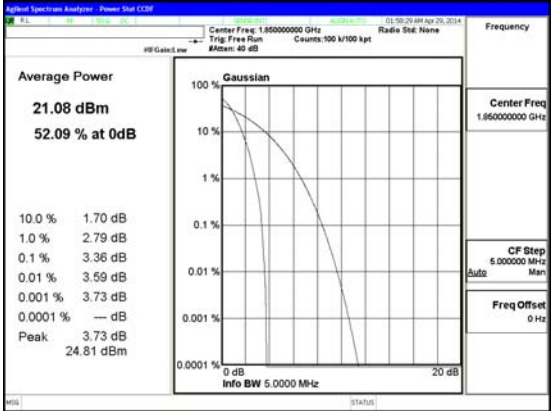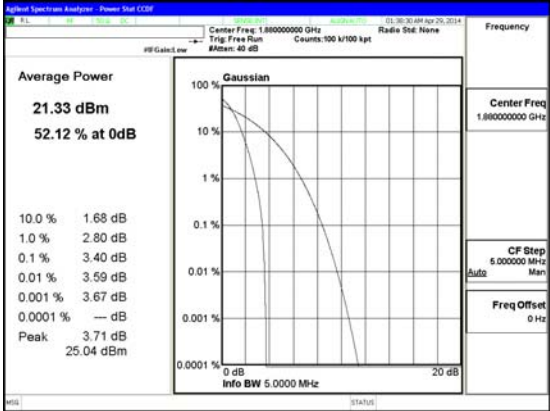
<p>Band Band 2 HSDPA</p>	 <p style="text-align: center;">Band WCDMA B2 HSDPA</p>	 <p style="text-align: center;">Band WCDMA B2 REL99</p>
--	---	--

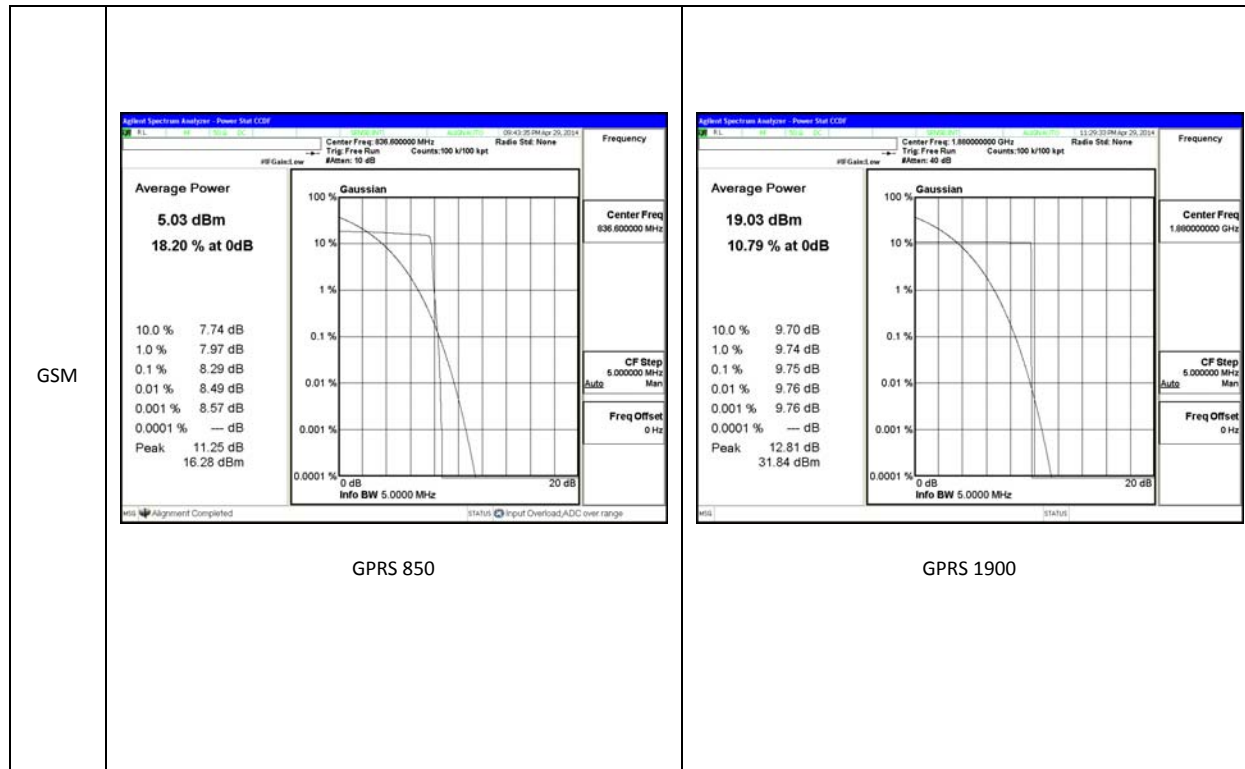

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)


MODES TESTED



GSM 850, GSM1900, WCDMA Band 2

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	244.79	246.75
		190	836.6	246.75	317.1
		251	848.8	248.58	322.3
GSM1900	GPRS	512	1850.2	242.61	314.9
		661	1880	241.5	313.4
		810	1909.8	244.35	313.5
Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 2	REL99	9262	1852.4	4.09	4.61
		9400	1880	4.09	4.62
		9538	1907.6	4.09	4.62
	HSDPA	9262	1852.4	4.08	4.62
		9400	1880	4.09	4.63
		9538	1907.6	4.1	4.62

10.1.1. OCCUPIED BANDWIDTH PLOTS

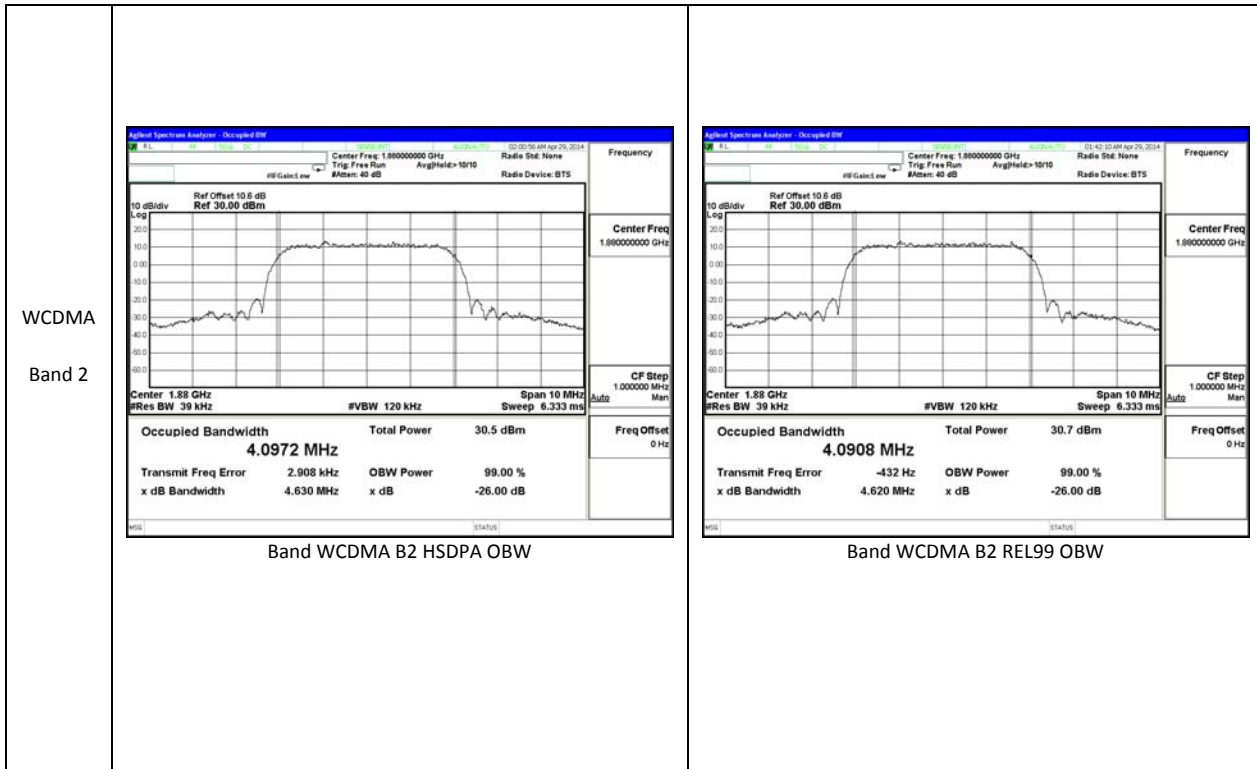

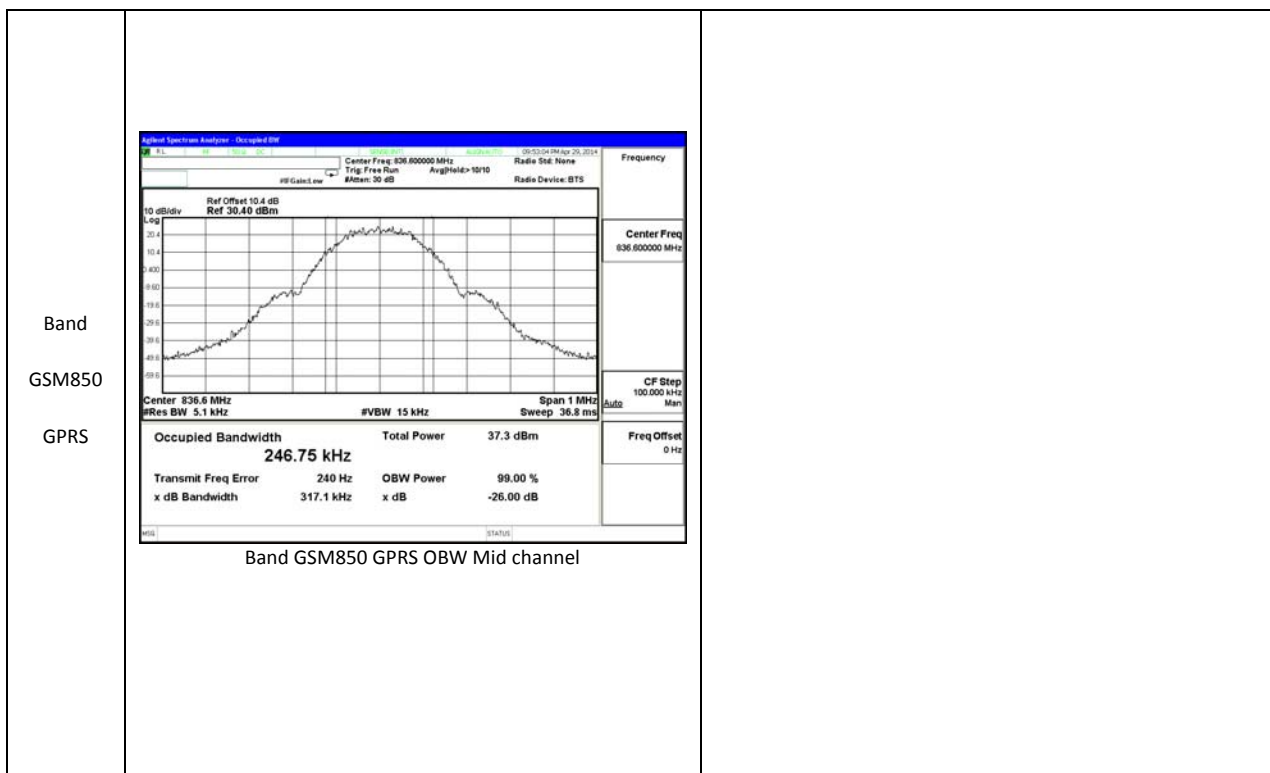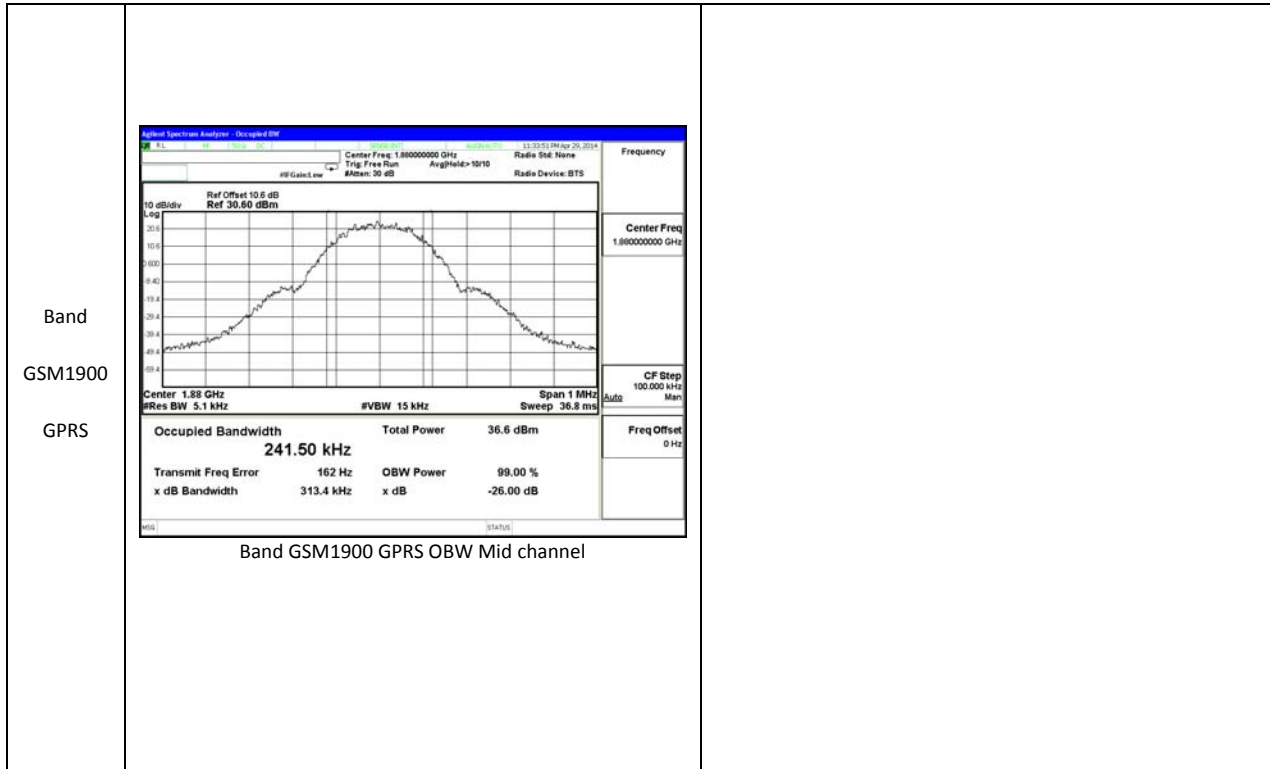

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01





The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


MODES TESTED


GSM 850, GSM 1900, WCDMA Band 2

RESULTS

10.2.1. BAND EDGE PLOTS
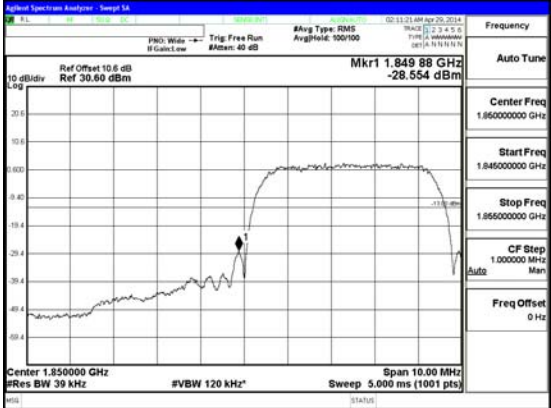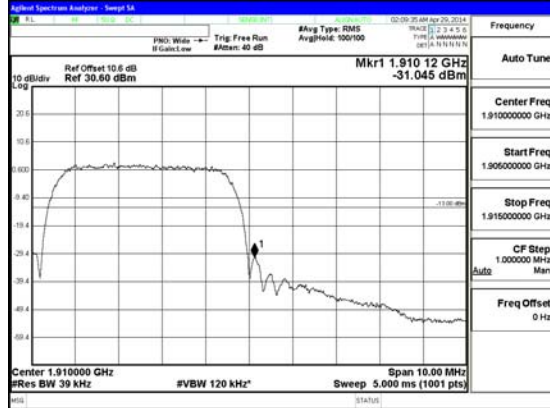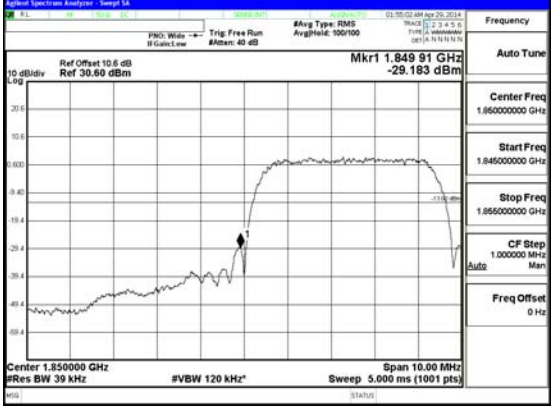
<p>Band Band 2 HSDPA</p>	 <p>Band WCDMA B2 HSDPA CBE</p>	 <p>Band WCDMA B2 HSDPA CBE</p>
<p>Band Band 2 REL99</p>	 <p>Band WCDMA B2 REL99 CBE</p>	 <p>Band WCDMA B2 REL99 CBE</p>

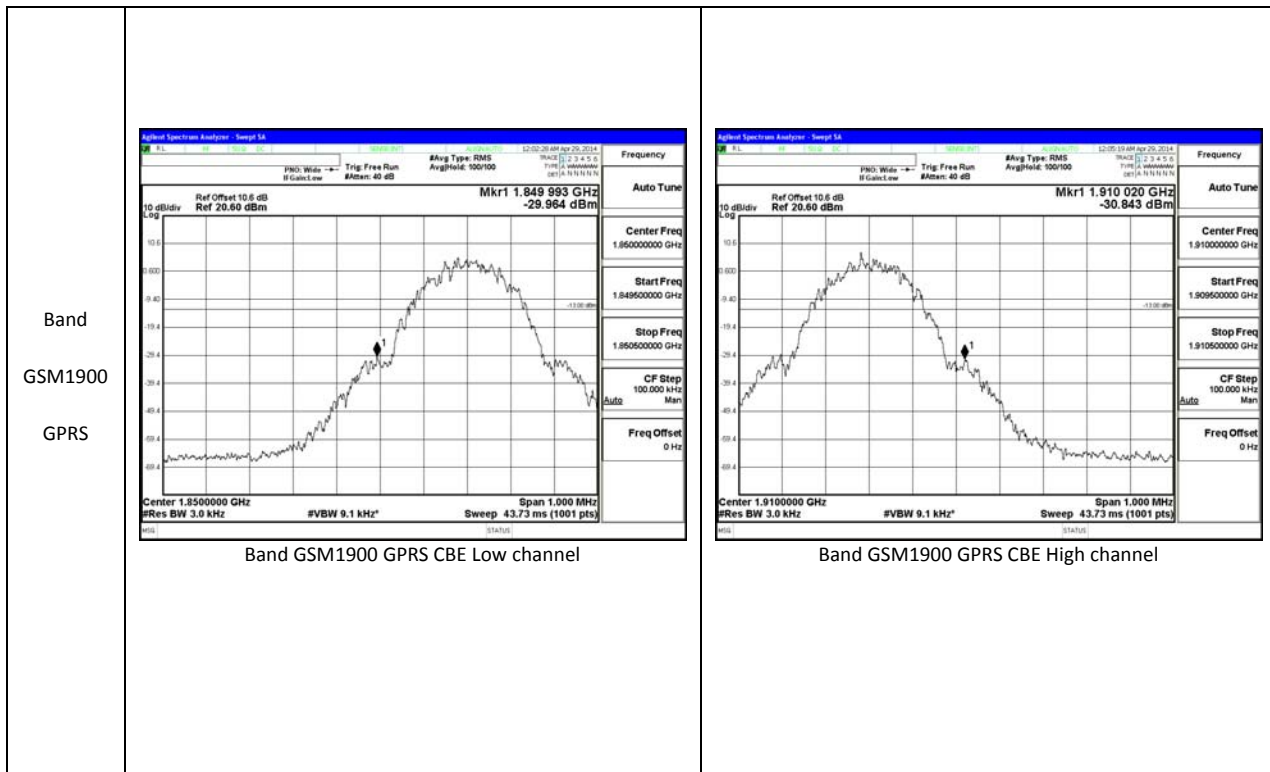

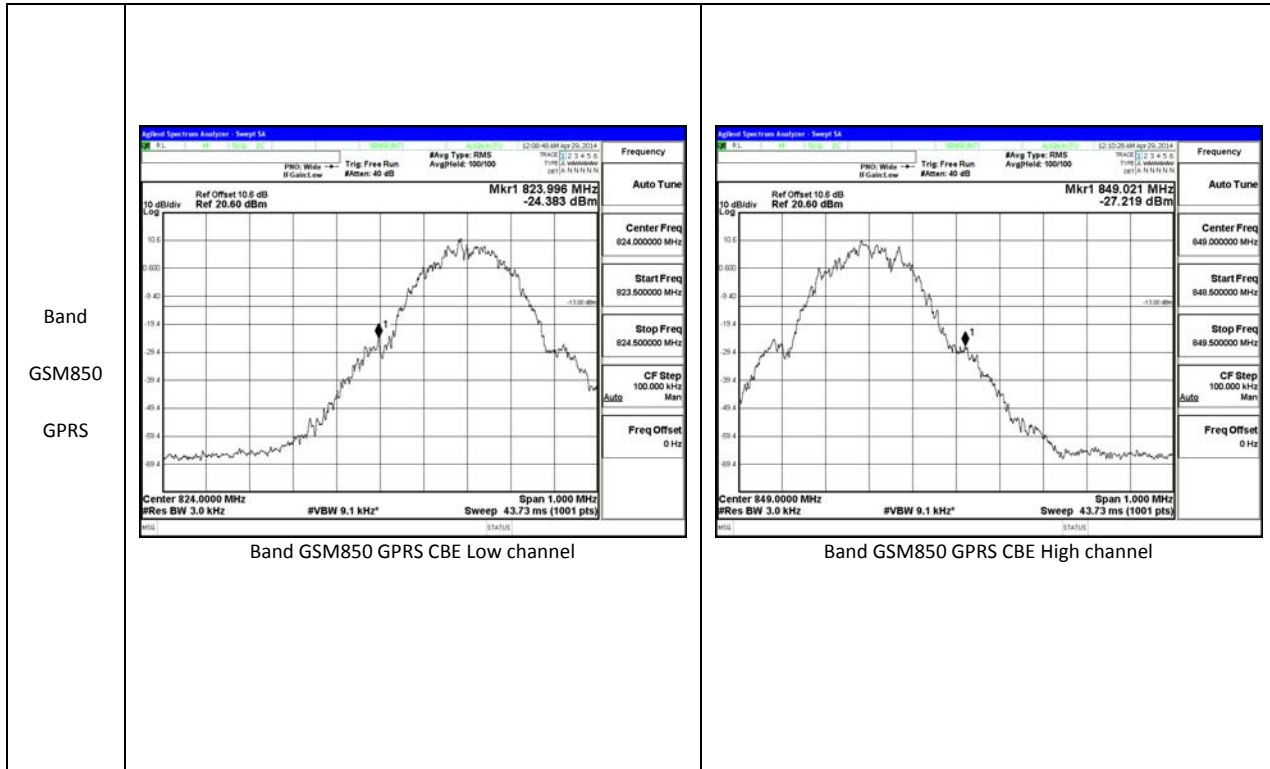

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

MODES TESTED


GSM850, GSM1900, WCDMA Band 2



RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM	850 GPRS	824.2	-23.18	-13	-10.18
		836.6	-22.76	-13	-9.76
		848.8	-23.08	-13	-10.08
	1900 GPRS	1850.2	-23.37	-13	-10.37
		1880	-21.86	-13	-8.86
		1909.8	-22.95	-13	-9.95
WCDMA Band 2	REL99	1852.4	-23.33	-13	-10.33
		1880	-22.95	-13	-9.95
		1907.6	-23.33	-13	-10.33
	HSDPA	1852.4	-22.32	-13	-9.32
		1880	-22.72	-13	-9.72
		1907.6	-21.97	-13	-8.97

10.3.2. OUT OF BAND EMISSIONS PLOTS

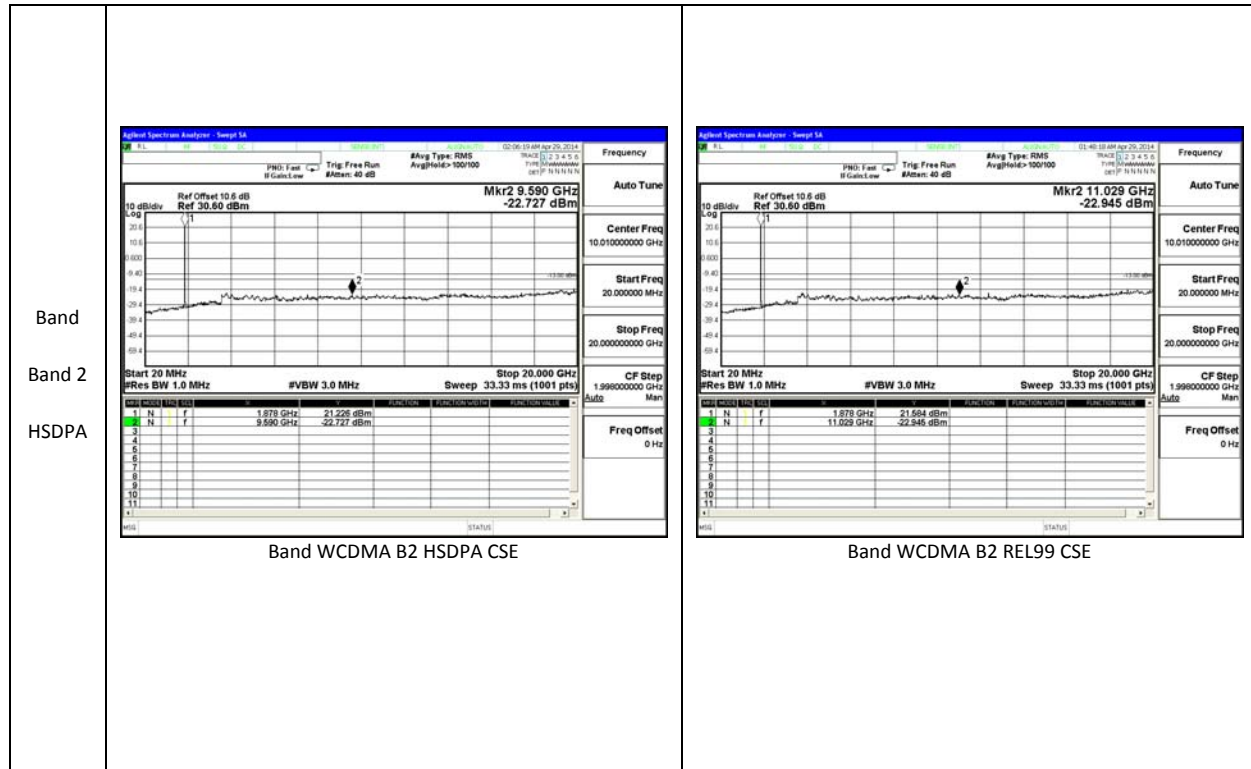
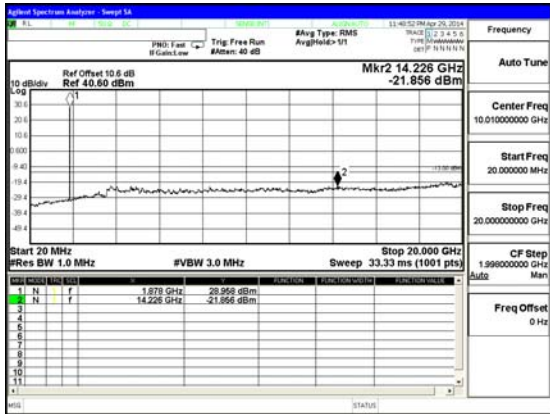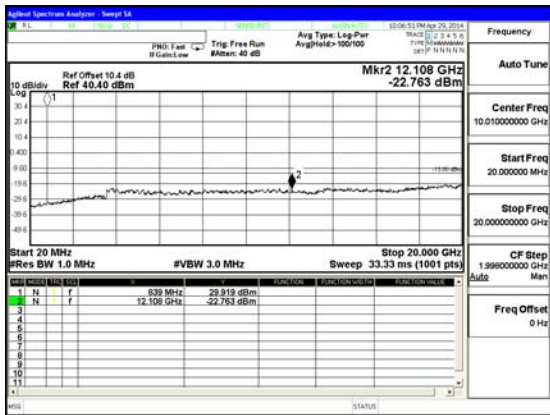
<p>Band GSM1900 GPRS</p>	 <p>Band GSM1900 GPRS CSE Mid channel</p>	
<p>Band GSM850 GPRS</p>	 <p>Band GSM850 GPRS CSE Mid channel</p>	

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

GSM850, – MID CHANNEL190, Frequency 836.6MHz

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.600003	0.012	2.5
3.80	40	836.600005	0.010	2.5
3.80	30	836.600007	0.007	2.5
3.80	20	836.600013	0	2.5
3.80	10	836.600010	0.004	2.5
3.80	0	836.600008	0.006	2.5
3.80	-10	836.600009	0.005	2.5
3.80	-20	836.600012	0.001	2.5
3.80	-30	836.600014	-0.001	2.5

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.600013	0.00000	2.5
4.30	20	836.600014	-0.00120	2.5
3.4 (end volt)	20	836.600012	0.00120	2.5

BAND II, Channel 9400 Freq: 1880MHz– MID CHANNEL

Reference Frequency: PC S Mid Channel 1880MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000001	0.002	2.5
3.80	40	1880.000002	0.002	2.5
3.80	30	1880.000004	0.001	2.5
3.80	20	1880.000005	0	2.5
3.80	10	1880.000004	0.001	2.5
3.80	0	1880.000003	0.001	2.5
3.80	-10	1880.000004	0.001	2.5
3.80	-20	1880.000005	0.000	2.5
3.80	-30	1880.000006	-0.001	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1880.000005	0	2.5
4.30	20	1880.000006	-0.001	2.5
3.4 (end volt)	20	1880.000004	0.001	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

MODES TESTED

GSM850, GSM1900, WCDMA Band 2

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	17.90	61.66
		9400	1880	19.50	89.13
		9538	1907.6	18.90	77.62
	HSDPA	9262	1852.4	17.74	59.43
		9400	1880	19.41	87.30
		9538	1907.6	19.22	83.56
GSM 1900	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
	GPRS	512	1850.2	27.25	530.88
		661	1880	27.51	563.64
810		1909.8	27.64	580.76	
Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	20.801	120.25
		190	836.6	22.501	177.87
		251	848.8	24.601	288.47

11.1.2. ERP/EIRP PLOTS

Band Band 2 HSDPA	High Frequency Fundamental Measurement Compliance Certification Services Chamber C								
	Company:		Samsung						
	Project #:		14I17666						
	Date:		04/28/14						
	Test Engineer:		Oren/Kiya						
	Configuration:		X-position						
	Mode:		HSDPA B2 1900Mhz						
	Test Equipment:								
	Receiving: T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable (244639001) Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1850.20	6.6	V	0.85	7.85	13.61	33.0	-19.4	
	1850.20	10.7	H	0.85	7.85	17.74	33.0	-15.3	
	Mid Ch								
	1880.00	6.2	V	0.85	7.85	13.19	33.0	-19.8	
	1880.00	12.4	H	0.85	7.85	19.41	33.0	-13.6	
	High Ch								
	1909.80	7.5	V	0.85	7.90	14.59	33.0	-18.4	
	1909.80	12.2	H	0.85	7.90	19.22	33.0	-13.8	
	Rev. 3.17.11								

	<p>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C</p>								
	<p>Company: Samsung Project #: 14I17666 Date: 04/28/14 Test Engineer: Oren/Kiya Configuration: X-position, EUT Only Mode: WCDMA_Rel 99_1900</p>								
	<p>Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse</p>								
Band									
Band 2									
REL99									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1850.20	7.93	V	0.85	7.9	14.93	33.0	-18.1	
	1850.20	10.90	H	0.85	7.9	17.90	33.0	-15.1	
	Mid Ch								
	1880.00	5.99	V	0.85	7.9	12.99	33.0	-20.0	
	1880.00	12.50	H	0.85	7.9	19.50	33.0	-13.5	
	High Ch								
	1909.80	7.54	V	0.85	7.9	14.54	33.0	-18.5	
	1909.80	11.90	H	0.85	7.9	18.90	33.0	-14.1	
	Rev. 3.17.11								
	Note: For Band 4 EIRP limit is 30dBm								

Band GSM1900 GPRS	High Frequency Fundamental Measurement Compliance Certification Services Chamber C								
	Company:		Samsung						
	Project #:		14I17666						
	Date:		04/28/14						
	Test Engineer:		Oren/Kiya						
	Configuration:		X-position						
	Mode:		GPRS 1900Mhz						
	Test Equipment:								
	Receiving: T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable (244639001) Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1850.20	16.6	V	0.85	7.85	23.56	33.0	-9.4	
	1850.20	20.3	H	0.85	7.85	27.25	33.0	-5.8	
	Mid Ch								
	1880.00	12.4	V	0.85	7.85	19.36	33.0	-13.6	
	1880.00	20.5	H	0.85	7.85	27.51	33.0	-5.5	
	High Ch								
	1909.80	13.3	V	0.85	7.90	20.33	33.0	-12.7	
	1909.80	20.6	H	0.85	7.90	27.64	33.0	-5.4	
	Rev. 3.17.11								

Band
GSM850
GPRS

**High Frequency Substitution Measurement
Compliance Certification Services Chamber C**

Company: Samsung
Project #: 14I17666
Date: 04/28/14
Test Engineer: Oren/Kiya
Configuration: X-position, EUT Only
Mode: GRPS 850MHz

Test Equipment:

Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)
 Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	13.18	V	0.9	0.0	12.28	38.5	-26.2	
824.20	21.70	H	0.9	0.0	20.80	38.5	-17.6	
Mid Ch								
836.60	14.99	V	0.9	0.0	14.09	38.5	-24.4	
836.60	23.40	H	0.9	0.0	22.50	38.5	-15.9	
High Ch								
848.80	15.80	V	0.9	0.0	14.90	38.5	-23.5	
848.80	25.50	H	0.9	0.0	24.60	38.5	-13.8	

Rev. 3.17.11

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I17666								
Date:		04/29/14								
Test Engineer:		Oren/Kiya								
Configuration:		X Position, EUT and AC Adapter								
Mode:		WCDMA_HSDPA 1900								
Chamber		Pre-amplifier			Filter		Limit			
3m Chamber		T343 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1852.4MHz									
	3.705	-13.3	V	3.0	35.4	1.0	-47.7	-13.0	-34.7	
Band 2	5.557	-10.3	V	3.0	34.7	1.0	-44.1	-13.0	-31.1	
	7.409	-4.6	V	3.0	34.9	1.0	-38.5	-13.0	-25.5	
HSDPA	3.705	-13.2	H	3.0	35.4	1.0	-47.6	-13.0	-34.6	
	5.557	-10.0	H	3.0	34.7	1.0	-43.8	-13.0	-30.8	
	7.409	-4.5	H	3.0	34.9	1.0	-38.4	-13.0	-25.4	
	Mid Ch, 1880.0MHz									
	3.760	-14.4	V	3.0	35.3	1.0	-48.8	-13.0	-35.8	
	5.640	-9.2	V	3.0	34.7	1.0	-43.0	-13.0	-30.0	
	7.520	-7.2	V	3.0	34.9	1.0	-41.1	-13.0	-28.1	
	3.760	-12.8	H	3.0	35.3	1.0	-47.1	-13.0	-34.1	
	5.640	-9.9	H	3.0	34.7	1.0	-43.6	-13.0	-30.6	
	7.520	-3.5	H	3.0	34.9	1.0	-37.4	-13.0	-24.4	
	High Ch, 1907.6 MHz									
	3.820	-13.1	V	3.0	35.3	1.0	-47.3	-13.0	-34.3	
	5.723	-9.9	V	3.0	34.7	1.0	-43.7	-13.0	-30.7	
	7.630	-4.8	V	3.0	34.9	1.0	-38.8	-13.0	-25.8	
	3.820	-13.6	H	3.0	35.3	1.0	-47.9	-13.0	-34.9	
	5.723	-8.9	H	3.0	34.7	1.0	-42.7	-13.0	-29.7	
	7.630	-4.2	H	3.0	34.9	1.0	-38.1	-13.0	-25.1	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17666
Date: 04/29/14
Test Engineer: Oren/Kiya
Configuration: X Position, EUT and AC Adapter
Mode: WCDMA_Rel 1900

Chamber

3m Chamber

Pre-amplifier

T343 8449B

Filter

Filter 1

Limit

Part 24

	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1852.4MHz									
	3.705	-13.3	V	3.0	35.4	1.0	-47.7	-13.0	-34.7	
Band 2	5.557	-10.4	V	3.0	34.7	1.0	-44.1	-13.0	-31.1	
	7.409	-5.2	V	3.0	34.9	1.0	-39.1	-13.0	-26.1	
REL99	3.705	-13.0	H	3.0	35.4	1.0	-47.4	-13.0	-34.4	
	5.557	-10.0	H	3.0	34.7	1.0	-43.7	-13.0	-30.7	
	7.409	-4.4	H	3.0	34.9	1.0	-38.3	-13.0	-25.3	
	Mid Ch, 1880.0MHz									
	3.760	-12.9	V	3.0	35.3	1.0	-47.2	-13.0	-34.2	
	5.640	-10.3	V	3.0	34.7	1.0	-44.0	-13.0	-31.0	
	7.520	-5.2	V	3.0	34.9	1.0	-39.1	-13.0	-26.1	
	3.760	-13.1	H	3.0	35.3	1.0	-47.4	-13.0	-34.4	
	5.640	-9.0	H	3.0	34.7	1.0	-42.7	-13.0	-29.7	
	7.520	-4.3	H	3.0	34.9	1.0	-38.2	-13.0	-25.2	
	High Ch, 1907.6 MHz									
	3.820	-12.9	V	3.0	35.3	1.0	-47.2	-13.0	-34.2	
	5.723	-9.4	V	3.0	34.7	1.0	-43.1	-13.0	-30.1	
	7.630	-5.1	V	3.0	34.9	1.0	-39.0	-13.0	-26.0	
	3.820	-13.2	H	3.0	35.3	1.0	-47.4	-13.0	-34.4	
	5.723	-9.3	H	3.0	34.7	1.0	-43.0	-13.0	-30.0	
	7.630	-3.5	H	3.0	34.9	1.0	-37.5	-13.0	-24.5	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I17666								
Date:		04/28/14								
Test Engineer:		Oren/Kiya								
Configuration:		EUT with AC charger								
Mode:		GPRS 1900								
Chamber		Pre-amplifer			Filter		Limit			
3m Chamber		T343 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850MHz									
GSM1900	3.700	-14.9	V	3.0	35.4	1.0	-49.3	-13.0	-36.3	
	5.550	-18.8	V	3.0	34.7	1.0	-52.5	-13.0	-39.5	
	7.400	-17.2	V	3.0	34.9	1.0	-51.1	-13.0	-38.1	
GPRS	3.700	-15.4	H	3.0	35.4	1.0	-49.8	-13.0	-36.8	
	5.550	-18.5	H	3.0	34.7	1.0	-52.2	-13.0	-39.2	
	7.400	-14.6	H	3.0	34.9	1.0	-48.5	-13.0	-35.5	
	Mid Ch, 1880.0MHz									
	3.760	-15.9	V	3.0	35.3	1.0	-50.2	-13.0	-37.2	
	5.640	-18.8	V	3.0	34.7	1.0	-52.5	-13.0	-39.5	
	7.520	-17.3	V	3.0	34.9	1.0	-51.2	-13.0	-38.2	
	3.760	-15.7	H	3.0	35.3	1.0	-50.1	-13.0	-37.1	
	5.640	-18.5	H	3.0	34.7	1.0	-52.2	-13.0	-39.2	
	7.520	-15.9	H	3.0	34.9	1.0	-49.8	-13.0	-36.8	
	High Ch, 1909.8 MHz									
	3.820	-17.2	V	3.0	35.3	1.0	-51.4	-13.0	-38.4	
	5.729	-19.9	V	3.0	34.7	1.0	-53.6	-13.0	-40.6	
	7.639	-17.2	V	3.0	35.0	1.0	-51.2	-13.0	-38.2	
	3.820	-18.4	H	3.0	35.3	1.0	-52.7	-13.0	-39.7	
	5.729	-19.6	H	3.0	34.7	1.0	-53.3	-13.0	-40.3	
	7.639	-17.9	H	3.0	35.0	1.0	-51.9	-13.0	-38.9	
Rev. 03.03.09										

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17666
Date: 04/28/14
Test Engineer: Oren/Kiya
Configuration: X Position, EUT and AC Adapter
Mode: GPRS 850

Chamber

3m Chamber

Pre-amplifier

T34 8449B

Filter

Filter 1

Limit

Part 22

	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band GSM850 GPRS	Low Ch, 824.2MHz										
		1.648	-3.6	V	3.0	37.4	1.0	-40.0	-13.0	-27.0	
		2.473	-13.8	V	3.0	36.4	1.0	-49.2	-13.0	-36.2	
		3.297	-14.5	V	3.0	35.8	1.0	-49.3	-13.0	-36.3	
		1.648	-3.3	H	3.0	37.4	1.0	-39.7	-13.0	-26.7	
		2.473	-12.8	H	3.0	36.4	1.0	-48.2	-13.0	-35.2	
		3.297	-14.8	H	3.0	35.8	1.0	-49.6	-13.0	-36.6	
		Mid Ch, 836.6MHz									
		1.673	-3.6	V	3.0	37.3	1.0	-39.9	-13.0	-26.9	
		2.510	-11.3	V	3.0	36.4	1.0	-46.6	-13.0	-33.6	
		3.346	-14.0	V	3.0	35.8	1.0	-48.8	-13.0	-35.8	
		1.673	-0.9	H	3.0	37.3	1.0	-37.2	-13.0	-24.2	
	2.510	-15.9	H	3.0	36.4	1.0	-51.3	-13.0	-38.3		
	3.346	-15.0	H	3.0	35.8	1.0	-49.8	-13.0	-36.8		
	High Ch, 848.8MHz										
	1.698	-5.2	V	3.0	37.3	1.0	-41.5	-13.0	-28.5		
	2.547	-13.8	V	3.0	36.3	1.0	-49.1	-13.0	-36.1		
	3.395	-13.9	V	3.0	35.7	1.0	-48.6	-13.0	-35.6		
	1.698	-1.3	H	3.0	37.3	1.0	-37.6	-13.0	-24.6		
	2.547	-14.7	H	3.0	36.3	1.0	-50.0	-13.0	-37.0		
	3.395	-14.4	H	3.0	35.7	1.0	-49.1	-13.0	-36.1		

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.