



Issue Date:

129 Samsung-ro,  
Yeongtong-gu, Suwon-Si,  
Gyeonggi-Do, 16677  
Korea  
Tel: 82-31-8062-4341  
Fax: 82-31-279-9985

# FCC TEST REPORT

**Manufacturer: SAMSUNG Electronics Co., Ltd.**

**Model: SM-G6100**

**FCC ID: A3LSMG6100**

**Application Type: Certification**

**EUT Type: Portable Handset**

All measurements reported here are in accordance with FCC Rules,  
47CFR Part2 and Part22.

Prepared By ..... Date .....  
DH Ju  
Test Engineer

Checked By ..... Date .....  
CH Kim  
Deputy Technical Manager

Authorized By ..... Date .....  
YG Choi  
Technical Manager



Issue Date:

### Revision History

Rev. #	Issue Date	Revisions	Revised By
1		▪ Initial issue	DH Ju

– End of this page –



## Table of Contents

<b>§2.1033 General Information</b> .....	<b>4</b>
<b>1. INTRODUCTION</b> .....	<b>5</b>
1.1. General.....	5
<b>2. PRODUCT INFORMATION</b> .....	<b>5</b>
2.1. Equipment Description .....	5
2.2. Device Capabilities .....	5
<b>3. DESCRIPTION OF TESTS</b> .....	<b>6</b>
3.1. Evaluation Procedure .....	6
3.2. Measurement Procedure for Radiated Power and Radiated Spurious Emissions .	6
3.3. EMI Suppression Device(s)/Modifications .....	6
<b>4. TEST EQUIPMENT LIST</b> .....	<b>7</b>
<b>5. SAMPLE CALCULATIONS</b> .....	<b>8</b>
5.1. QPSK Modulation .....	8
5.2. 16QAM Modulation.....	8
5.3. Spurious Radiated Emission .....	8
<b>6. TEST RESULTS</b> .....	<b>9</b>
6.1. Summary .....	9
6.2. Occupied Bandwidth.....	10
6.3. Spurious and Harmonic Emissions at Antenna Terminal .....	15
6.4. Band Edge Emissions at Antenna Terminal .....	23
6.5. Frequency Stability / Temperature Variation .....	34
6.6. Radiated Power (ERP) .....	37
6.7. Radiated Spurious Emissions Measurements .....	40
<b>7. CONCLUSION</b> .....	<b>44</b>



Issue Date:

**§2.1033 General Information**

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**APPLICANT ADDRESS:** 129 Samsung-ro,  
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

**TEST SITE:** Samsung Electronics Quality Assurance Lab

**TEST SITE ADDRESS:** 129 Samsung-ro,  
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

**FCC RULE PART(S):** §2, §22

**TEST PROCEDURE(S):** ANSI/TIA-603-D-2010, KDB971168 v02r02

**BASE MODEL:** SM-G6100

**FCC ID:** A3LSMG6100

**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)

**MODE:** LTE

**EMISSION DESIGNATOR:** See Table 0-1

**TX FREQUENCY BLOCK** 824 – 849MHz (LTE Band 5)

**RX FREQUENCY BLOCK** 869 – 894MHz (LTE Band 5)

**MAX POWER RATING:** 0.070 W ERP LTE Band 5 (18.42 dBm)

**TEST DEVICE SERIAL NO.:** FCN-009-A , FCN-009-B

**DATE(S) OF TEST:** July 13 – August 5 , 2016

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (Watt)	Max. Power (dBm)
LTE Band 5	824.7 – 848.3	1M09G7D	QPSK	0.064	18.07
LTE Band 5	824.7 – 848.3	1M09W7D	16QAM	0.049	16.88
LTE Band 5	825.5 – 847.5	2M69G7D	QPSK	0.064	18.08
LTE Band 5	825.5 – 847.5	2M69W7D	16QAM	0.054	17.29
LTE Band 5	826.5 – 846.5	4M49G7D	QPSK	0.068	18.33
LTE Band 5	826.5 – 846.5	4M48W7D	16QAM	0.050	16.95
LTE Band 5	829 - 844	8M93G7D	QPSK	0.070	18.42
LTE Band 5	829 - 844	8M93W7D	16QAM	0.055	17.39

Table 0-1. Emission Designator



## 1. INTRODUCTION

### 1.1. General

These measurement tests were conducted at SAMSUNG Electronics QA Laboratory. The site address is 129 Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea.

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

The Equipment Under Test (EUT) is the Samsung Portable Handset FCC ID: A3LSMG6100. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2. Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11 b/g/n WLAN, Bluetooth (1x, EDR, LE), ANT+



### 3. DESCRIPTION OF TESTS

#### 3.1. Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM - Communications Equipment- Measurements and Performance Standards" (ANSI/TIA-603-D-2010) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1MHz) Digital Transmission System" (KDB 971168) were used in the measurement of the Samsung Portable Handset FCC ID: A3LSMG6100.

#### 3.2. Measurement Procedure for Radiated Power and Radiated Spurious Emissions

The radiated and spurious measurements were made at the full anechoic chamber. The equipment under test was placed on the Turn Device at the same height and a distance of 3-meters from the measuring antenna.

The turn device is designed for mobile device measurements. Different sized devices can be mounted on the mounting bracket made of Rohacell.

The turn device is mounted onto a turntable to have both 360° vertical and horizontal rotation. The measurement was made for each horizontal/vertical position in combination with horizontally and vertically polarized measuring antenna at Fully-anechoic chamber, it is equivalent to test in 3-orthogonal planes.

The substitution antenna will replace the EUT antenna at the same position. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The output level of the signal generator shall be adjusted until an equal or a known related level that was measured from the EUT. This level was recorded. For emissions above 1 GHz, the above procedure is repeated by using horn antennas and dBi gain is taken into consideration.

The power of the emission is calculated using the following formula:

$$P_{d[\text{dBm}]} = P_{g[\text{dBm}]} - \text{cable loss}_{[\text{dB}]} + \text{antenna gain}_{[\text{dBd,dBi}]}$$

Where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole(dBd) or an isotropic source(dBi). The cable connects the generator to the substitute antenna.

Radiated power levels and radiated spurious emissions levels are investigated per ANSI/TIA-603-D-2010.

#### 3.3. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.



#### 4. TEST EQUIPMENT LIST

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Description	Model	Serial No.	Manufacturer	Cal. Date	Cal. Due
Wideband Radio Communication Tester	CMW500	140748	R&S	2015-10-28	2016-10-28
Wideband Radio Communication Tester	CMW500	140697	R&S	2015-11-04	2016-11-04
Signal & Spectrum Analyzer	FSW	103775	R&S	2015-12-16	2016-12-16
PXA Signal Analyzer	N9030A	MY52350977	Agilent	2015-10-20	2016-10-20
PSG Analog Signal Generator	E8257D	MY51501209	Agilent	2015-11-04	2016-11-04
EPM Series Power Meter	E4419B	GB41293846	Agilent	2015-09-22	2016-09-22
POWER SENSOR	E9300H	MY41495838	Agilent	2015-09-18	2016-09-18
DC Power Supply	E3642A	MY40022438	Agilent	2016-02-22	2017-02-22
Temperature Humidity Chamber	SH-641	92009178	Espec	2016-03-18	2017-03-18
Loop Antenna	HFH2-Z2	100275	R&S	2015-06-04	2017-06-04
DIPOLE ANTENNA	UHA 9105	9105-2412	Schwarzbeck	2015-09-08	2017-09-08
LOG PERIODIC DIPOLE ANTENNA	HL040	353255/020	R&S	2014-10-15	2016-10-15
HORN Antenna	3115	00156307	ETS LINDGREN	2015-05-07	2017-05-07
HORN Antenna	3115	00156245	ETS LINDGREN	2015-05-07	2017-05-07
HORN Antenna & Pre-amplifier assembly	HAP18-26N	216249	Flann	2015-12-02	2017-12-02
HORN Antenna & Pre-amplifier assembly	HAP18-26N	216251	Flann	2015-04-30	2017-04-30
PRE-AMPLIFIER	8449B	3008A00691	Agilent	2015-11-25	2016-11-25
RF Power Amplifier	5S1G4	304866	AR	2016-02-12	2017-02-12
Hygrothermograph Data Logger	SK-L200TH2a	5077	SATO	2015-11-06	2016-11-06
Hygrothermograph Data Logger	SK-L200TH2a	5095	SATO	2015-10-26	2016-10-26
Hygrothermograph Data Logger	SK-L200TH2a	5110	SATO	2015-10-26	2016-10-26
Power Divider	11636B	58456	Agilent	2016-04-21	2017-04-21
Highpass Filter	WHVX1.0/15G-10SS	39	Wainwright	2016-01-06	2017-01-06
Highpass Filter	WHKX3.0/18G-10SS	206	Wainwright	2016-01-06	2017-01-06
Attenuator 10dB	8491B	MY39264180	Agilent	2016-06-28	2017-06-28
Attenuator 20dB	8493C	74158	Agilent	2015-08-20	2016-08-20

Table 4-1. Test Equipment



## 5. SAMPLE CALCULATIONS

### 5.1. QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission

### 5.2. 16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulation

7 = Quantized/Digital Info

D = Data transmission

### 5.3. Spurious Radiated Emission

Example: Spurious emission at 3700.40MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turn device was -81.0dBm. The gain of the substituted antenna is 8.1dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3700.40MHz. So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.80dBm. The fundamental EIRP was 25.50dBm so this harmonic was  $25.50\text{dBm} - (-24.80) = 50.3\text{dBc}$ .



## 6. TEST RESULTS

### 6.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 22.917(a)	Conducted Band Edge / Spurious Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 6.3, 6.4
2.1046	Transmitter Conducted Output Power	N/A		PASS	See SAR Report
2.1055 22.355	Frequency Stability	$< 2.5 \text{ ppm}$		PASS	Section 6.5
22.913(a.2)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS	Section 6.6
2.1053 22.917(a)	Radiated Spurious Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 6.7

Table 6-1. Summary of Test Results

### Notes

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction value loaded into the analyzer. The correction value was used to account for the losses of the cables, couplers, and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and couplers.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Rohde & Schwarz and SAMSUNG Electronics "CMWrun", Version 1.8.1.

## 6.2. Occupied Bandwidth §2.1049

### Test Overview

The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 v02r02 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% Occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1~5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2~7 were repeated after changing the RBW such that it would be within 1~5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

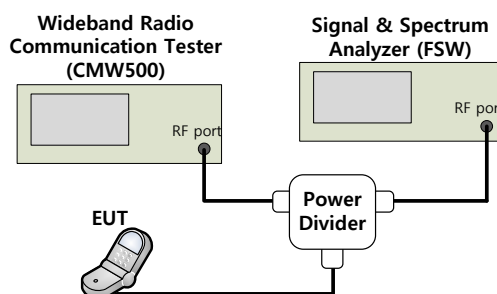


Figure 6-1. Test Instruments & Measurement Setup



Test Plots




Date: 19.JUL.2016 10:30:56

Plot 6-1. Occupied Bandwidth Plot (Band 5 – 1.4MHz QPSK - RB Size 6)




Date: 19.JUL.2016 10:35:56

Plot 6-2. Occupied Bandwidth Plot (Band 5 – 1.4MHz 16QAM - RB Size 6)

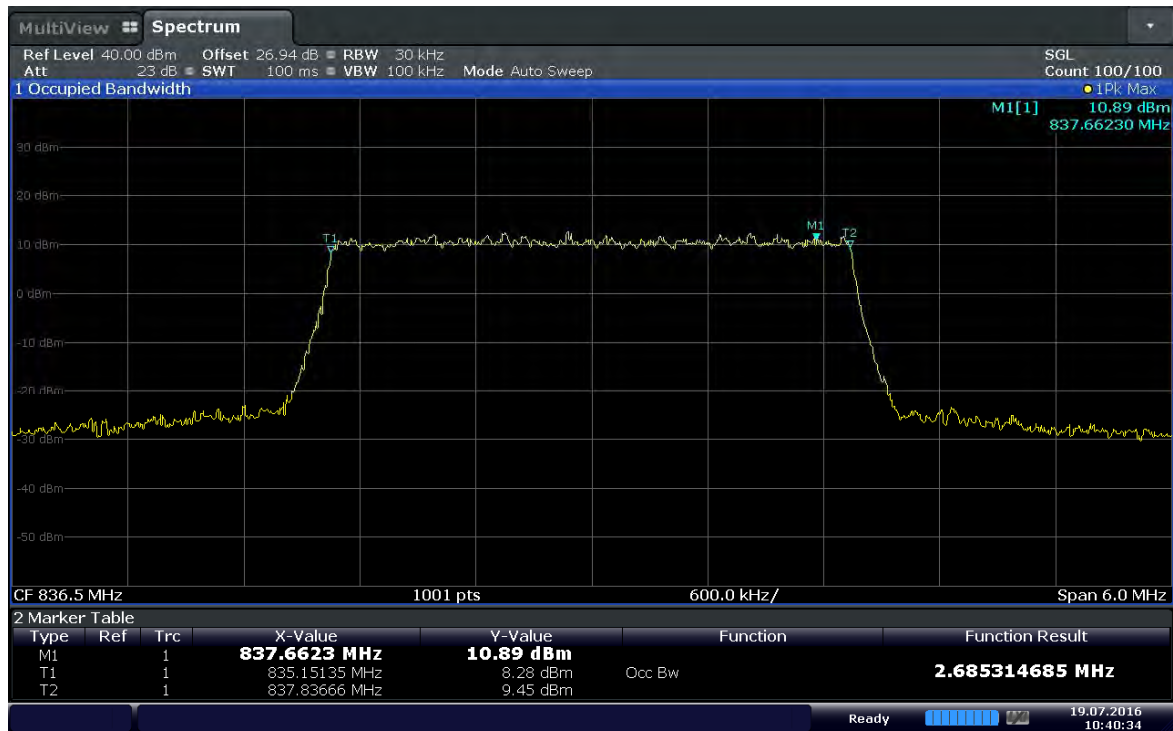


Date: 19.JUL.2016 10:40:34

Plot 6-3. Occupied Bandwidth Plot (Band 5 - 3.0MHz QPSK - RB Size 15)

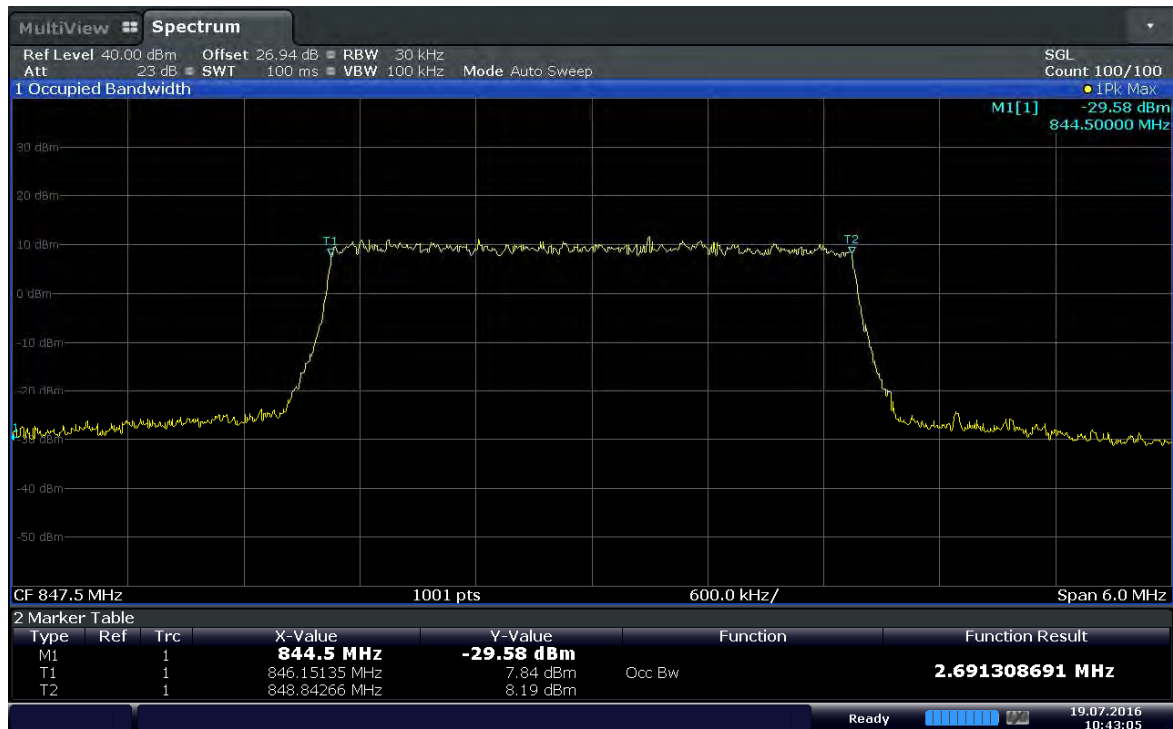


Date: 19.JUL.2016 10:43:05

Plot 6-4. Occupied Bandwidth Plot (Band 5 - 3.0MHz 16QAM - RB Size 15)

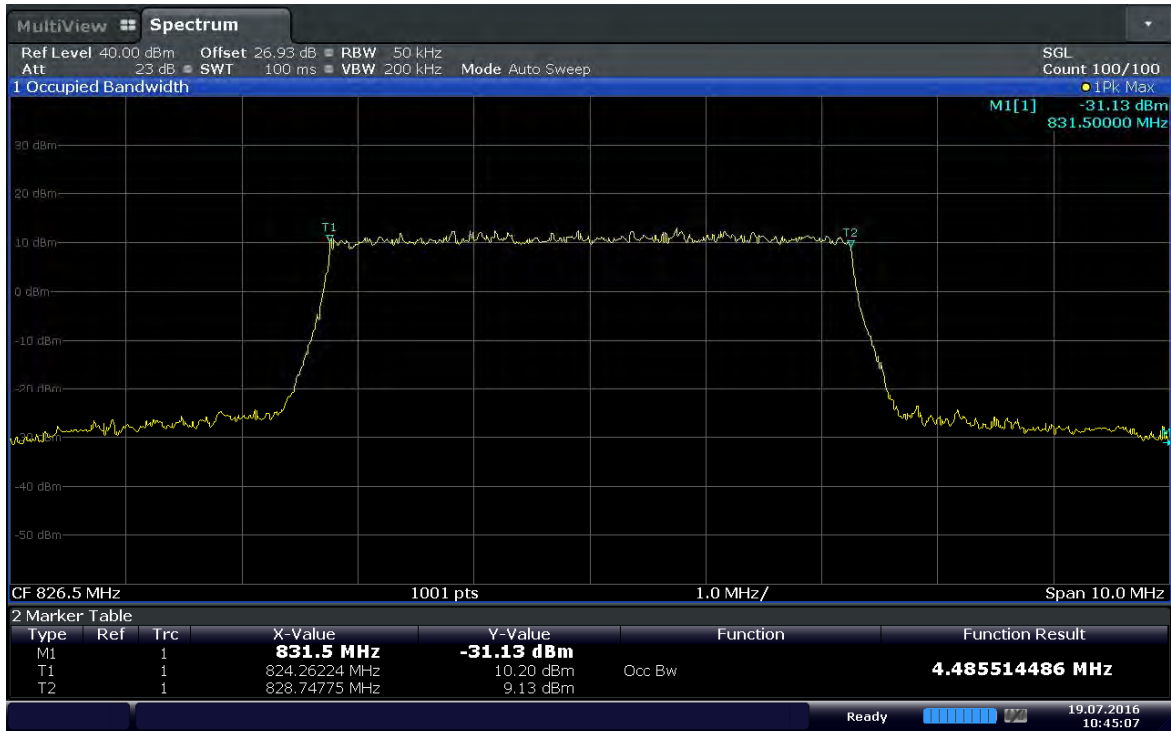


Date: 19.JUL.2016 10:45:08

Plot 6-5. Occupied Bandwidth Plot (Band 5 - 5.0MHz QPSK - RB Size 25)

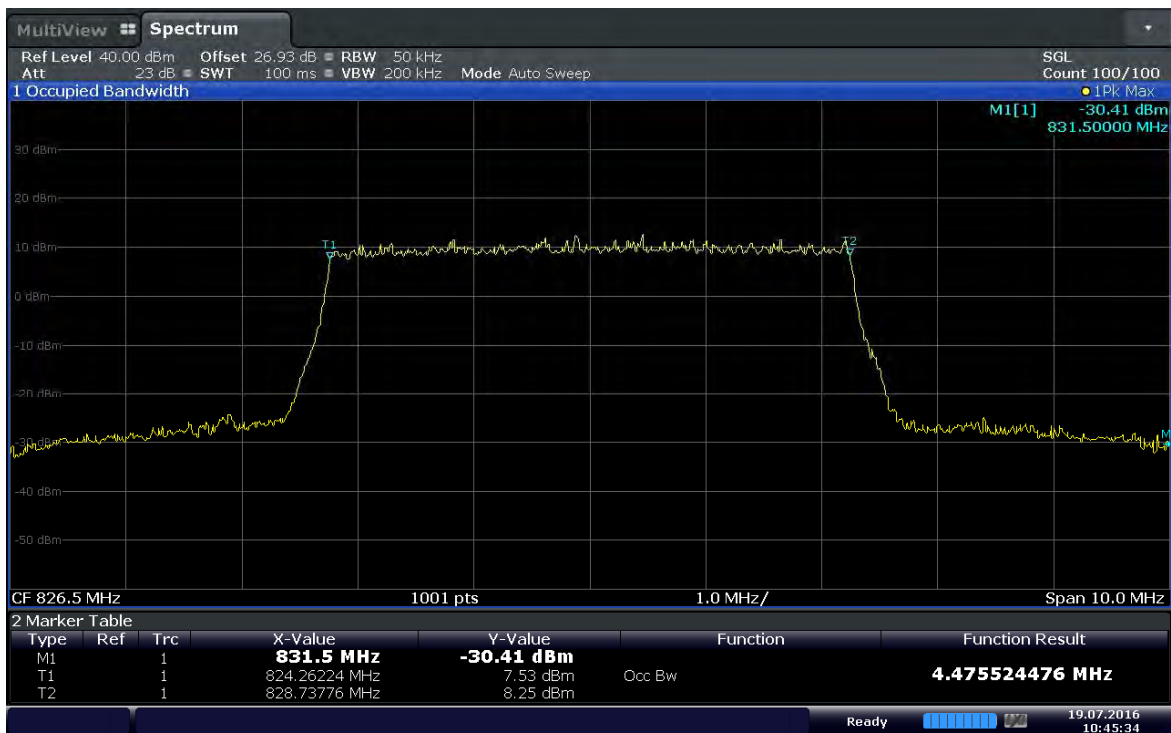


Date: 19.JUL.2016 10:45:34

Plot 6-6. Occupied Bandwidth Plot (Band 5 - 5.0MHz 16QAM - RB Size 25)

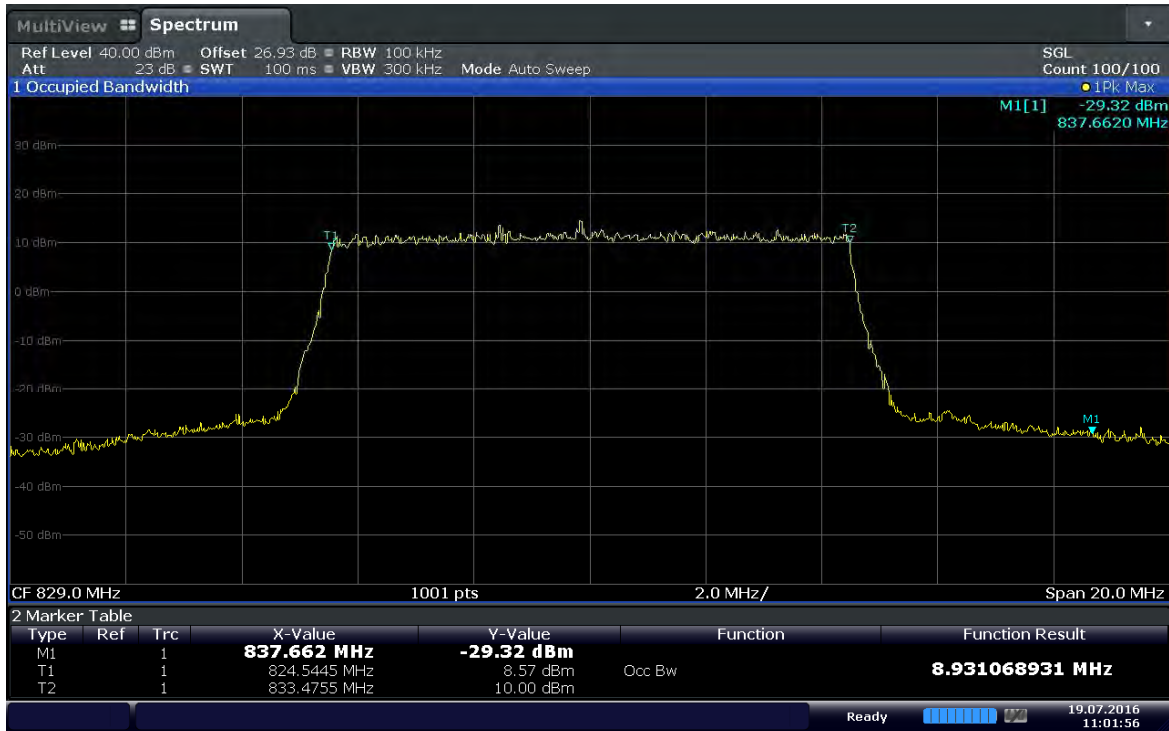

Date: 19.JUL.2016 11:01:57

Plot 6-7. Occupied Bandwidth Plot (Band 5 - 10.0MHz QPSK - RB Size 50)

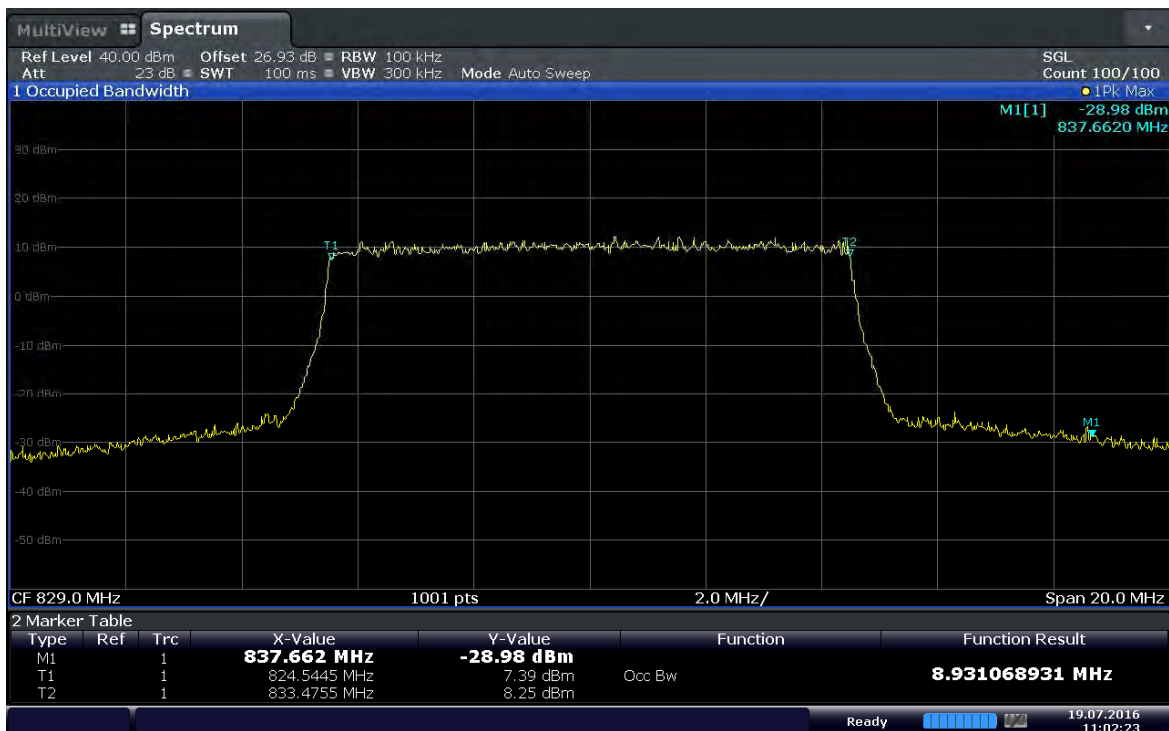

Date: 19.JUL.2016 11:02:23

Plot 6-8. Occupied Bandwidth Plot (Band 5 - 10.0MHz 16QAM - RB Size 50)



### 6.3. Spurious and Harmonic Emissions at Antenna Terminal §2.1051 §22.917(a)

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is  $43 + 10\log_{10}(P_{[\text{Watts}]})$ , where P is the transmitter power in Watts. Limit equivalent to -13dBm, calculation shown below.

$$\begin{aligned}43 + 10 \log_{10}(1.567\text{W}) &= 44.95 \text{ dB} \\1.567\text{W} &= 31.95 \text{ dBm} \\31.95 \text{ dBm} - 44.95 \text{ dB} &= -13 \text{ dBm}\end{aligned}$$

#### Test Procedure Used

KDB 971168 v02r02 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  100kHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

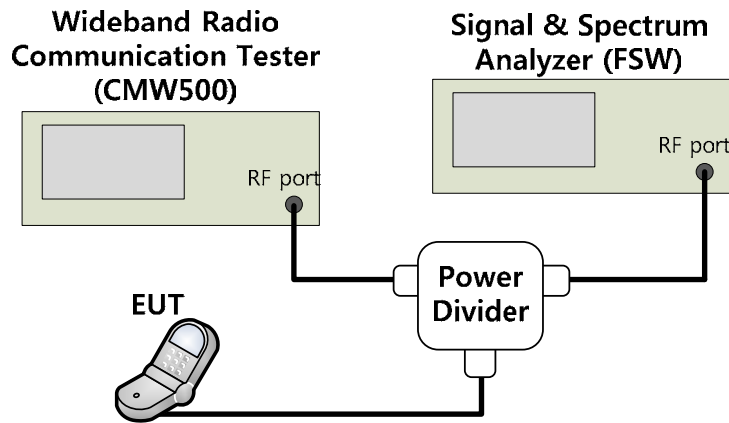



Figure 6-2. Test Instruments & Measurement Setup

### Test Note

1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100kHz or greater for cellular equipment whose frequencies are less than 1GHz. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.




Test Plots

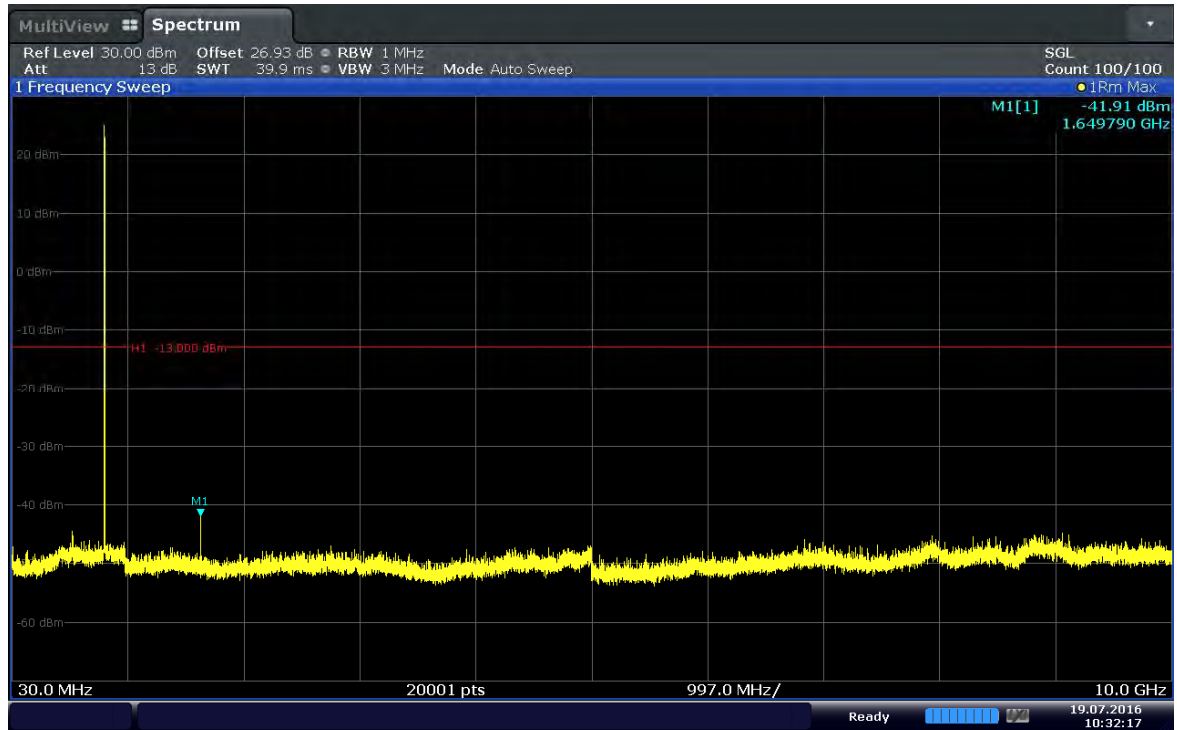

Date: 19.JUL.2016 10:32:17

Plot 6-9. Conducted Spurious Plot (Band 5-1.4MHz-QPSK-RB Size 3-RB Offset 3-Ch.20407)

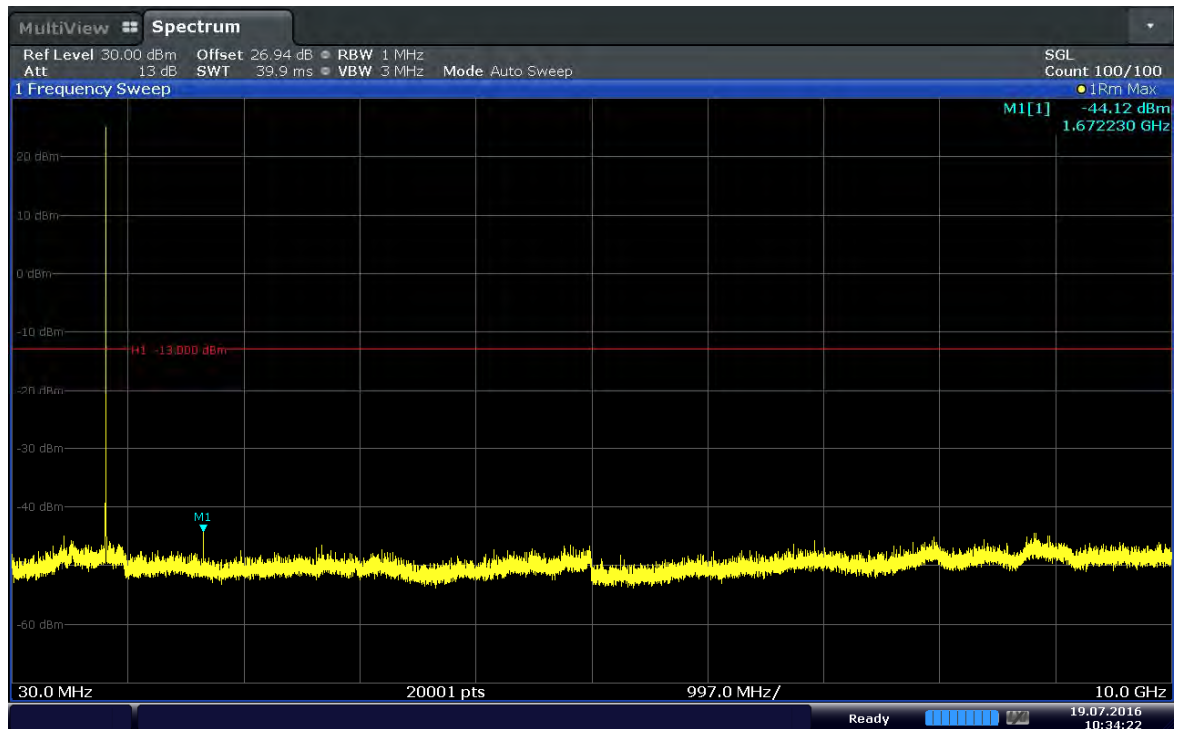


Date: 19.JUL.2016 10:34:22

Plot 6-10. Conducted Spurious Plot (Band 5-1.4MHz-QPSK-RB Size 3-RB Offset 0-Ch.20525)




Issue Date:

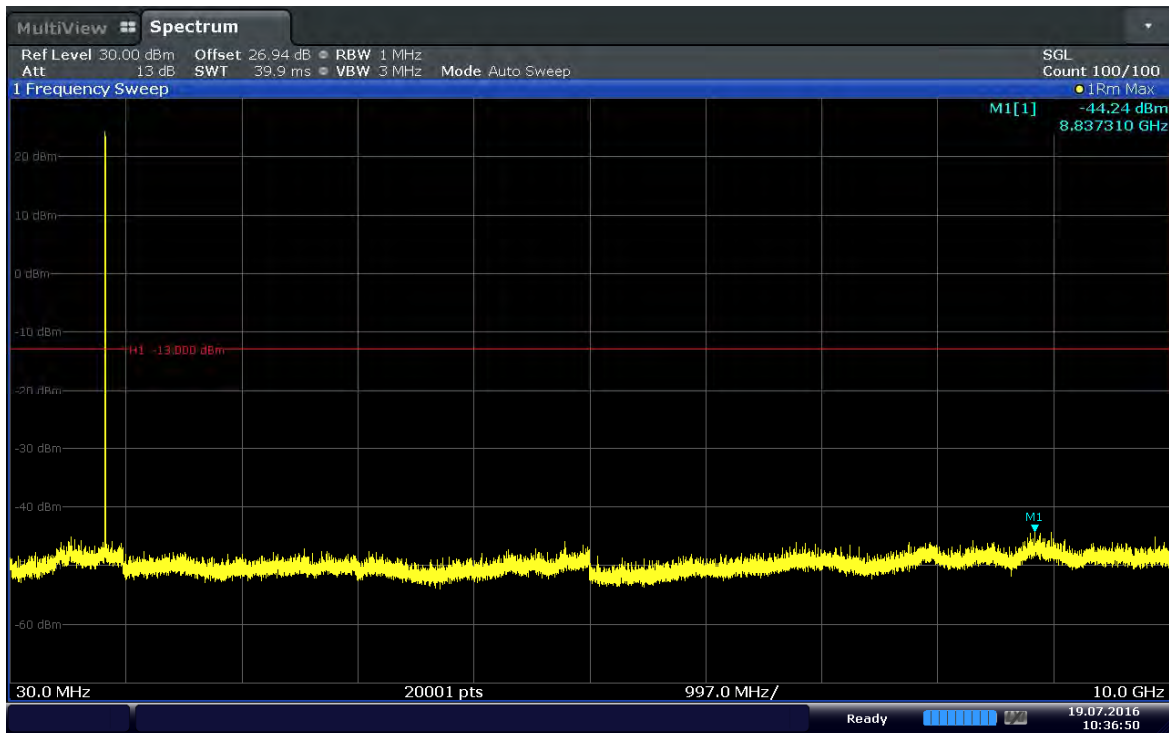


Date: 19.JUL.2016 10:36:50

Plot 6-11. Conducted Spurious Plot (Band 5–1.4MHz–QPSK–RB Size 3–RB Offset 2– Ch.20643)

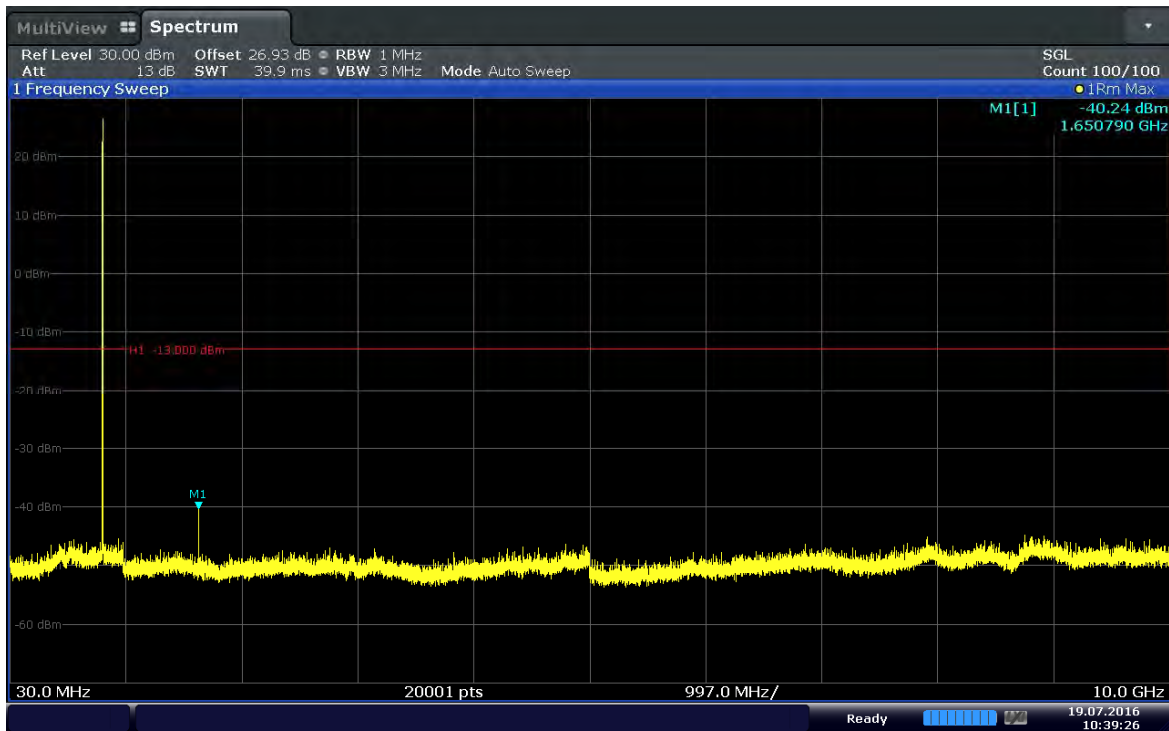


Date: 19.JUL.2016 10:39:26

Plot 6-12. Conducted Spurious Plot (Band 5–3.0MHz–QPSK–RB Size 1–RB Offset 7– Ch.20415)

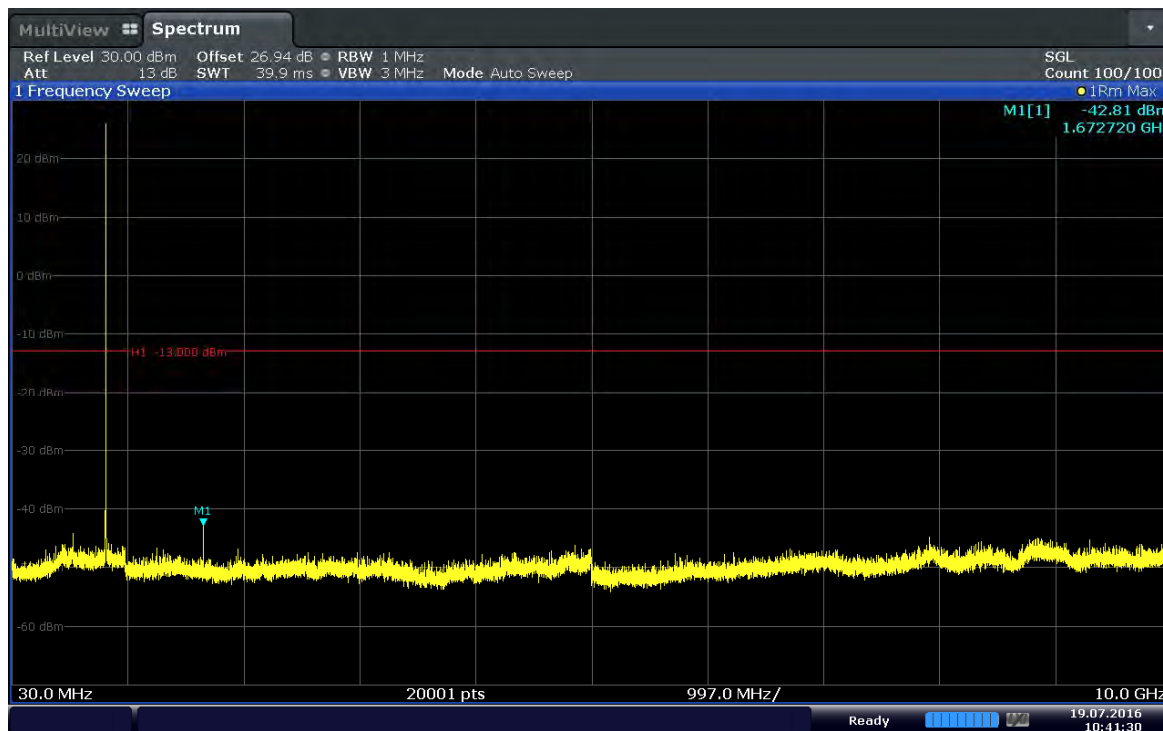

Date: 19.JUL.2016 10:41:31

Plot 6-13. Conducted Spurious Plot (Band 5-3.0MHz-QPSK-RB Size 1-RB Offset 7- Ch.20525)

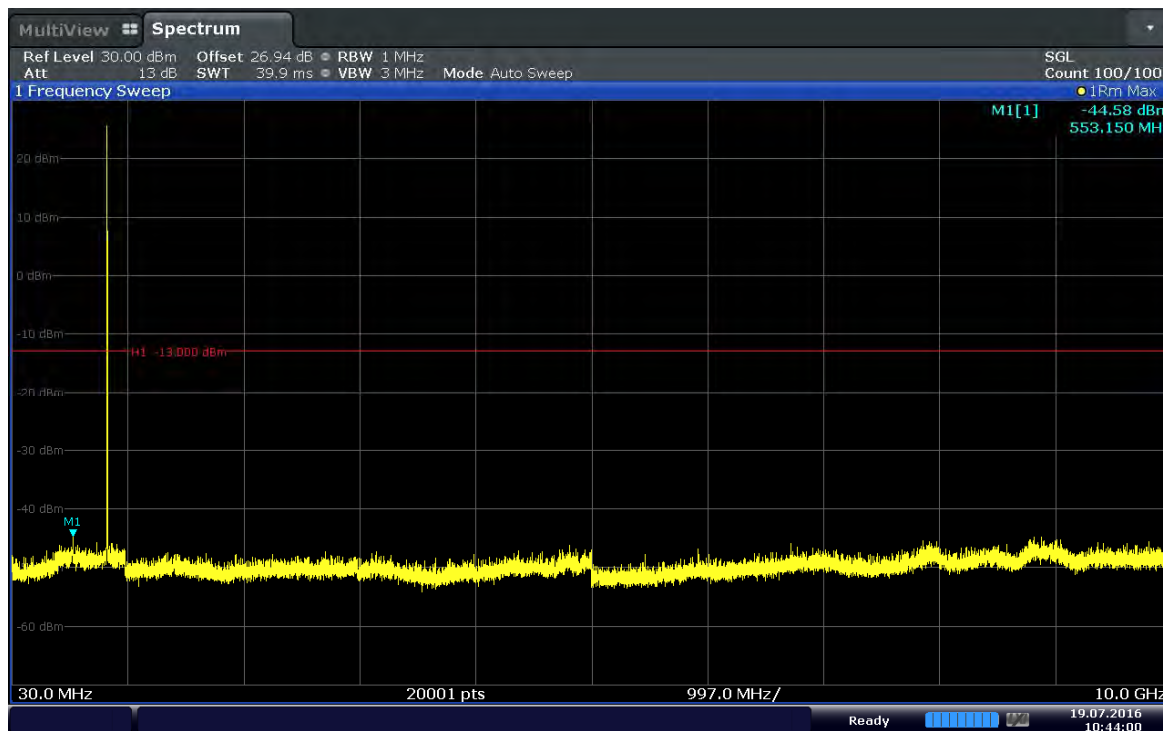


Date: 19.JUL.2016 10:43:59

Plot 6-14. Conducted Spurious Plot (Band 5-3.0MHz-QPSK-RB Size 1-RB Offset 7- Ch.20635)




Issue Date:

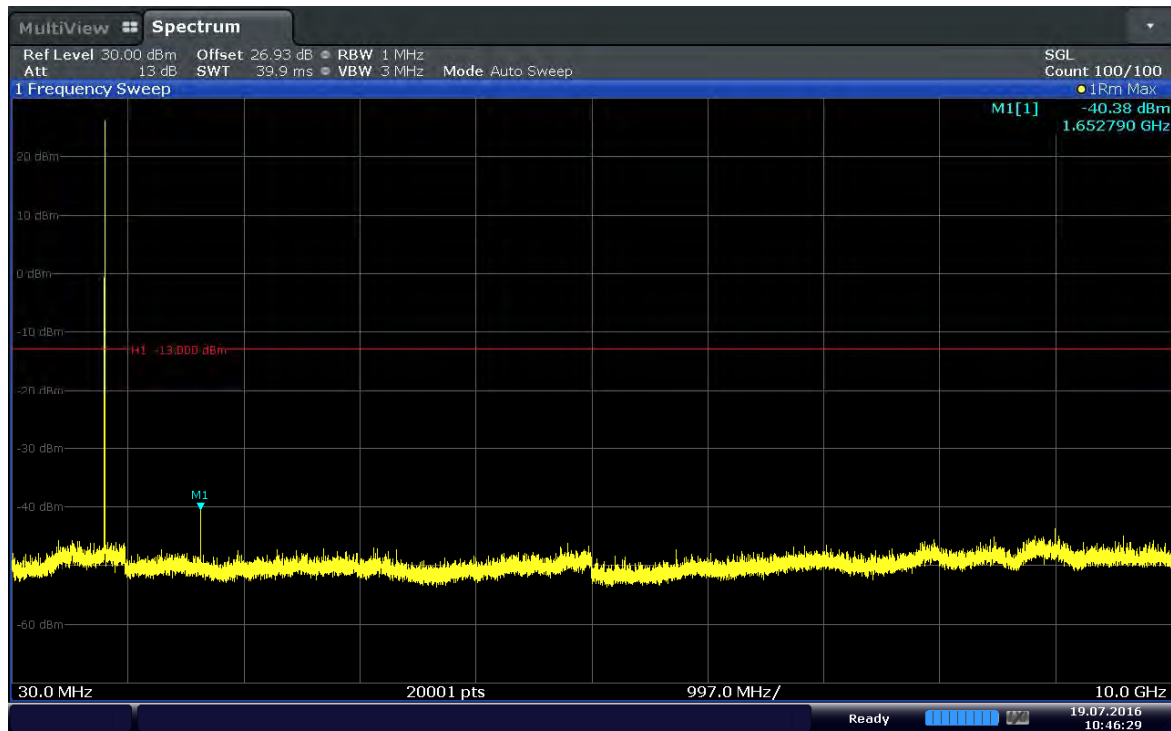


Date: 19.JUL.2016 10:46:28

Plot 6-15. Conducted Spurious Plot (Band 5–5.0MHz–QPSK–RB Size 1–RB Offset 12– Ch.20425)

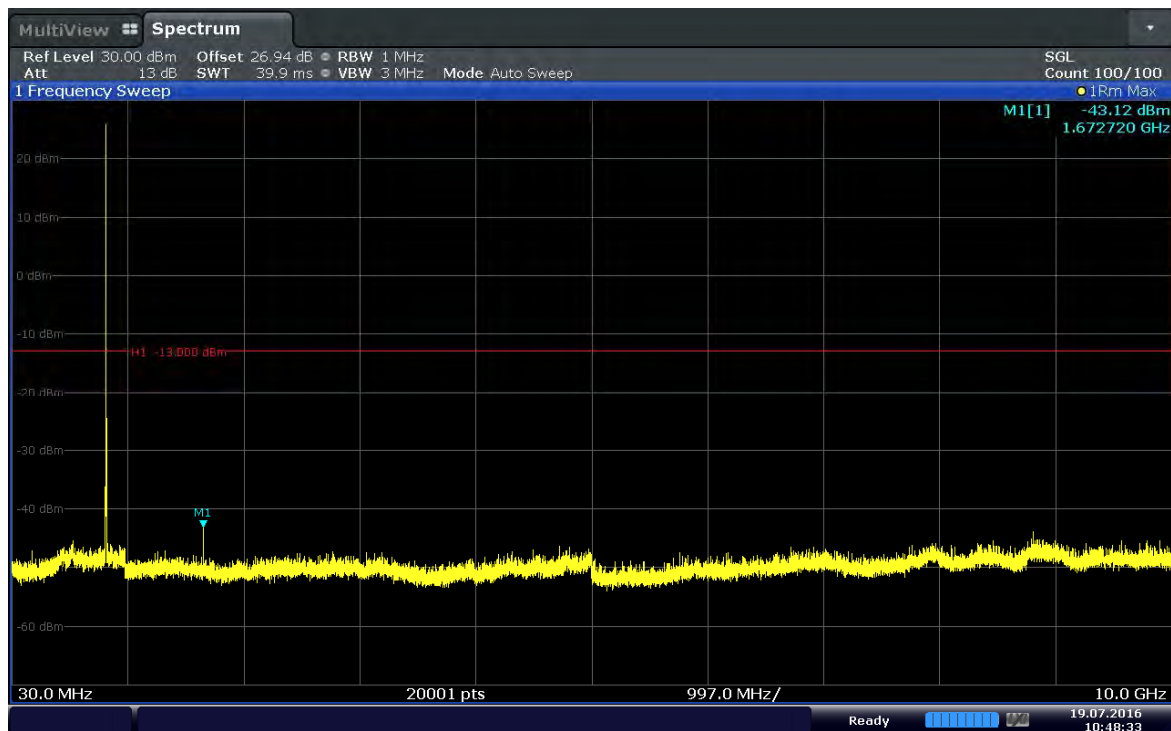


Date: 19.JUL.2016 10:48:33

Plot 6-16. Conducted Spurious Plot (Band 5–5.0MHz–QPSK–RB Size 1–RB Offset 12– Ch.20525)

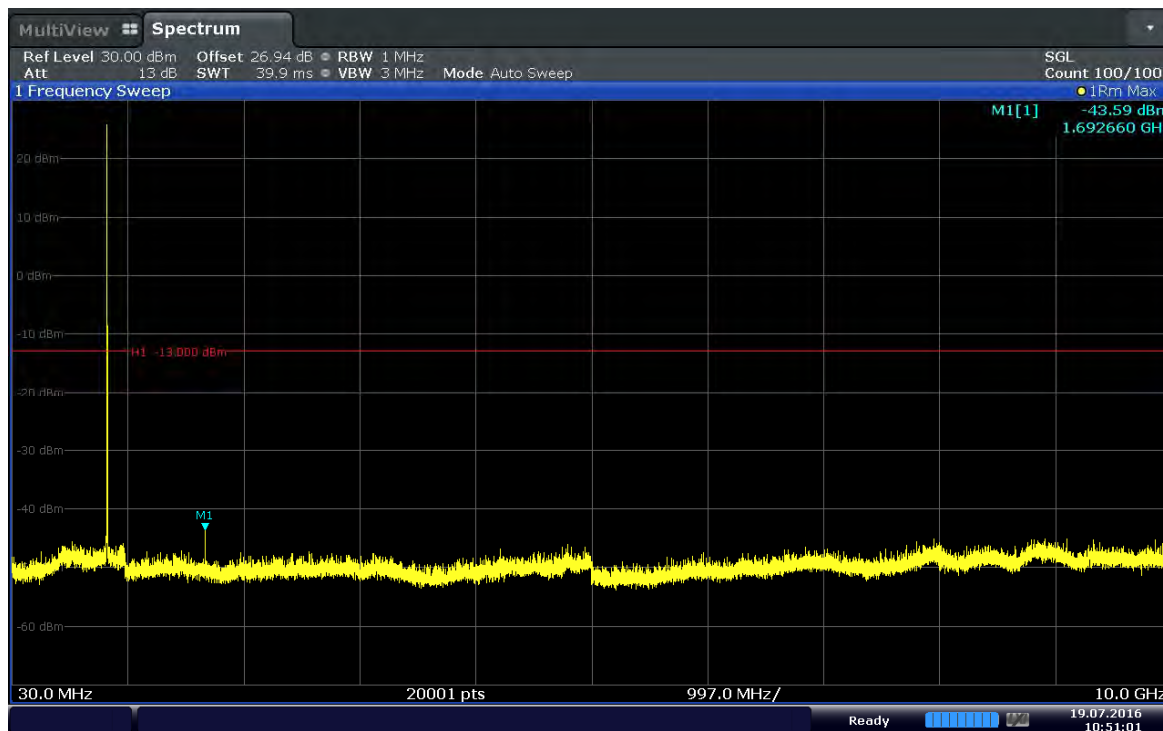


Date: 19.JUL.2016 10:51:02

Plot 6-17. Conducted Spurious Plot (Band 5–5.0MHz–QPSK–RB Size 1–RB Offset 12– Ch.20625)

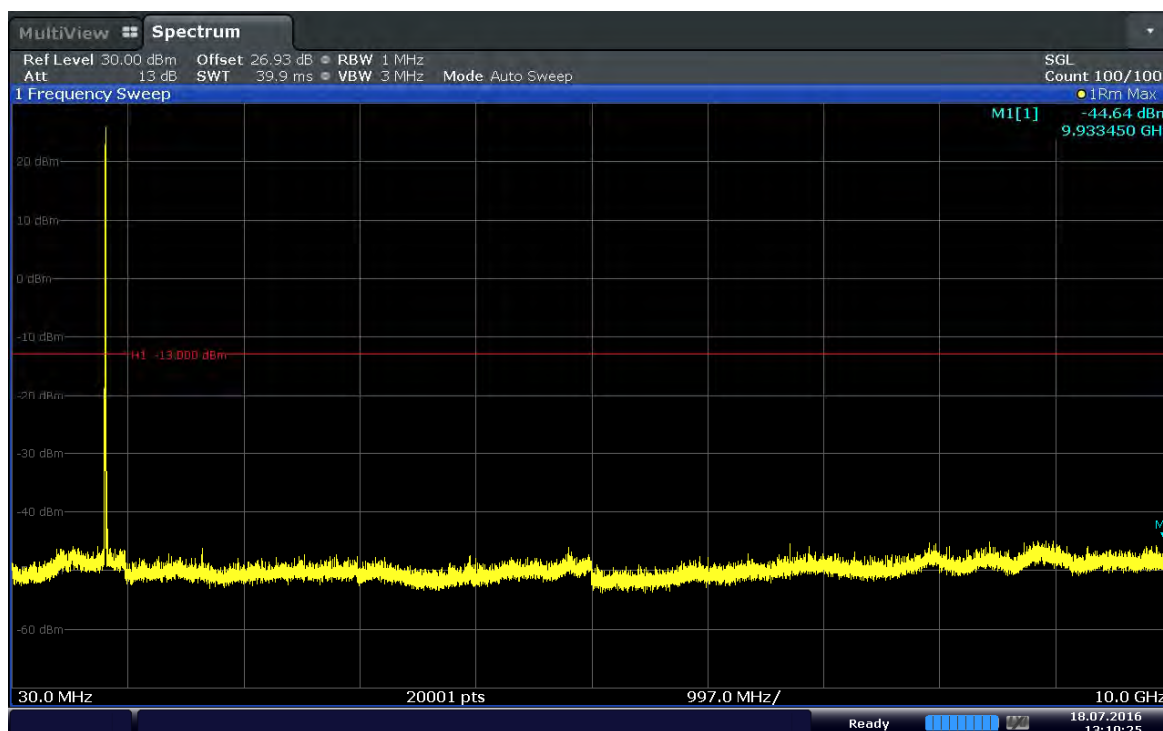


Date: 18.JUL.2016 13:10:25

Plot 6-18. Conducted Spurious Plot (Band 5–10.0MHz–QPSK–RB Size 1–RB Offset 49– Ch.20450)

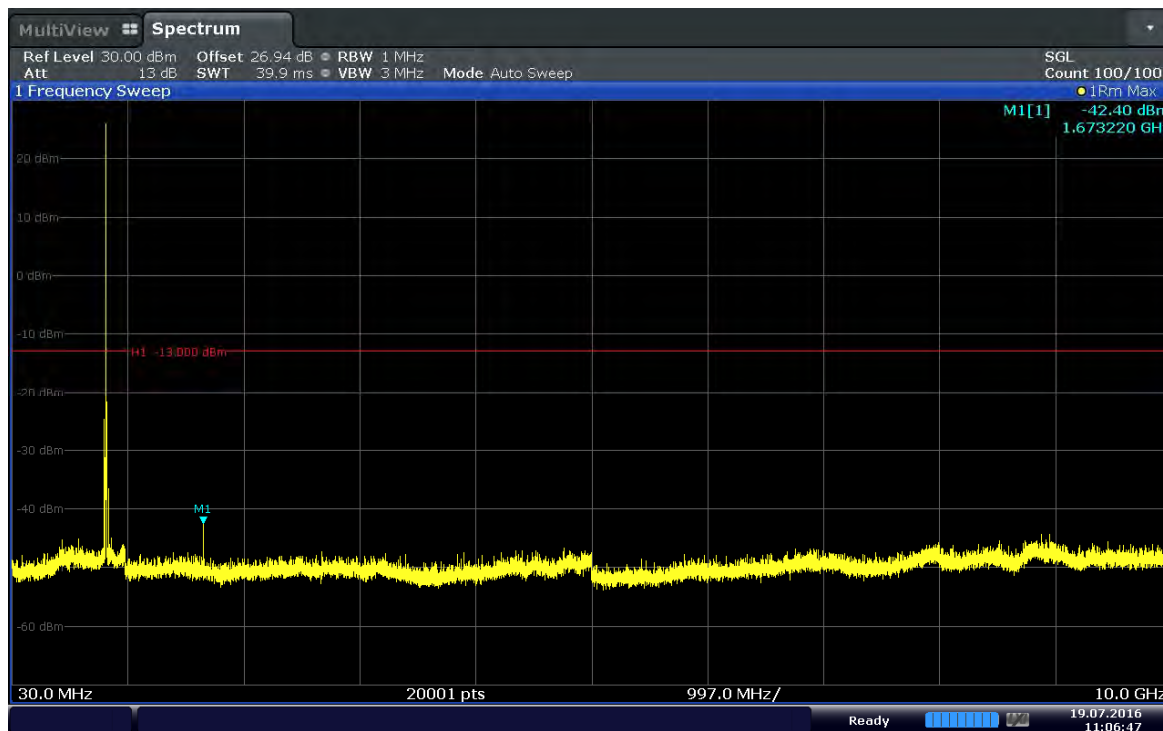

Date: 19.JUL.2016 11:06:47

Plot 6-19. Conducted Spurious Plot (Band 5–10.0MHz–QPSK–RB Size 1–RB Offset 25– Ch.20525)

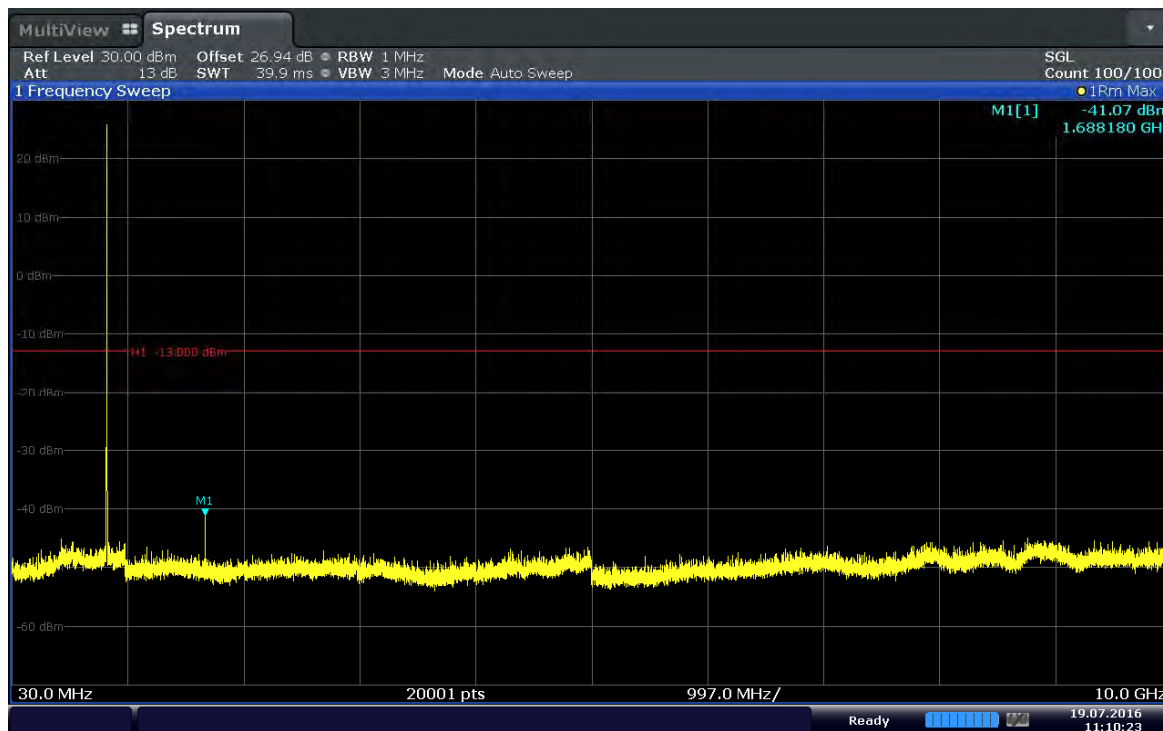

Date: 19.JUL.2016 11:10:24

Plot 6-20. Conducted Spurious Plot (Band 5–10.0MHz–QPSK–RB Size 1–RB Offset 25– Ch.20600)



#### 6.4. Band Edge Emissions at Antenna Terminal §2.1051 §22.917(a)

##### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{\text{Watts}})$ , where P is the transmitter power in Watts. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10 \log_{10}(1.567W) = 44.95 \text{ dB}$$

$$1.567W = 31.95 \text{ dBm}$$

$$31.95 \text{ dBm} - 44.95 \text{ dB} = -13 \text{ dBm}$$

##### Test Procedure Used

KDB 971168 v02r02 – Section 6.0

##### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

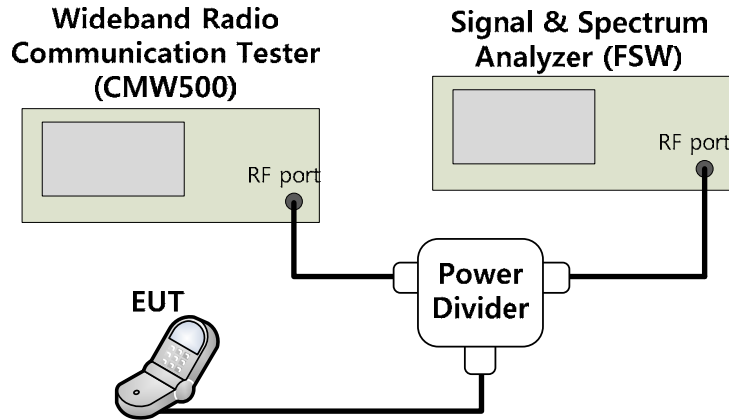


Figure 6-3. Test Instruments & Measurement Setup


### Test Notes

1. Per 22.917(b), in the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit.




Issue Date:

Test Plots

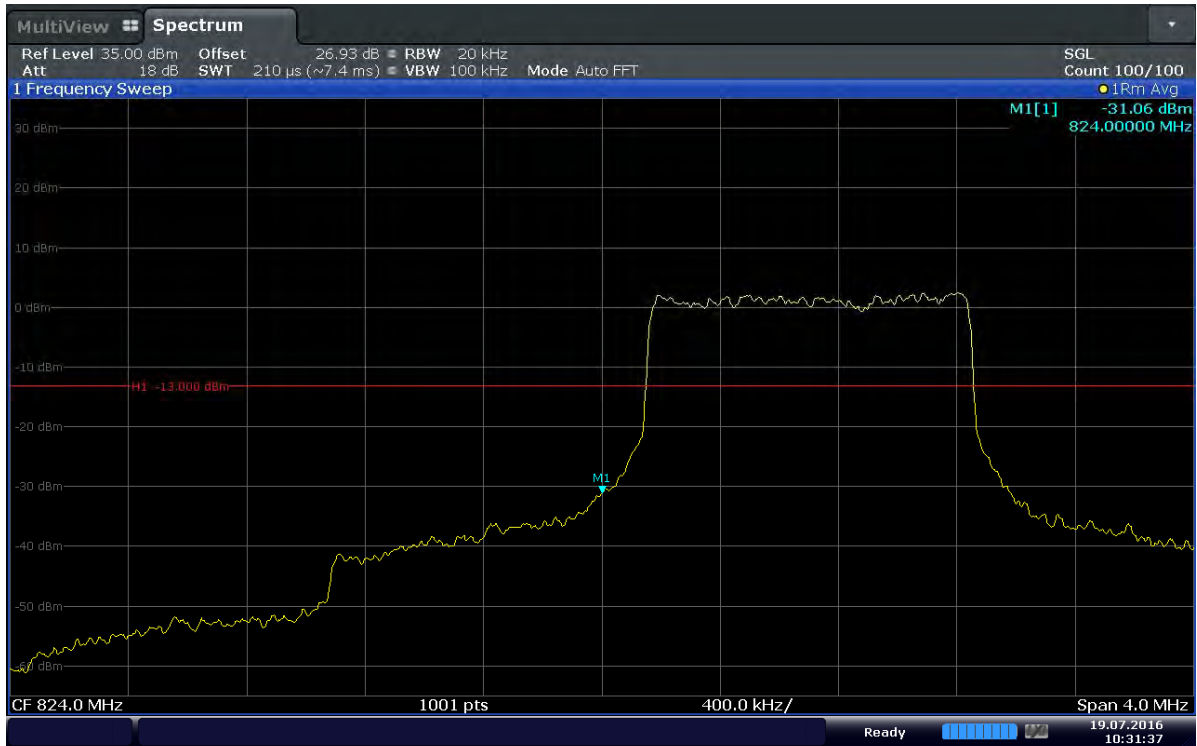


Date: 19 JUL 2016 10:31:38

Plot 6-21. Lower Band Edge Plot (Band5 – 1.4MHz – QPSK – RB Size 6)

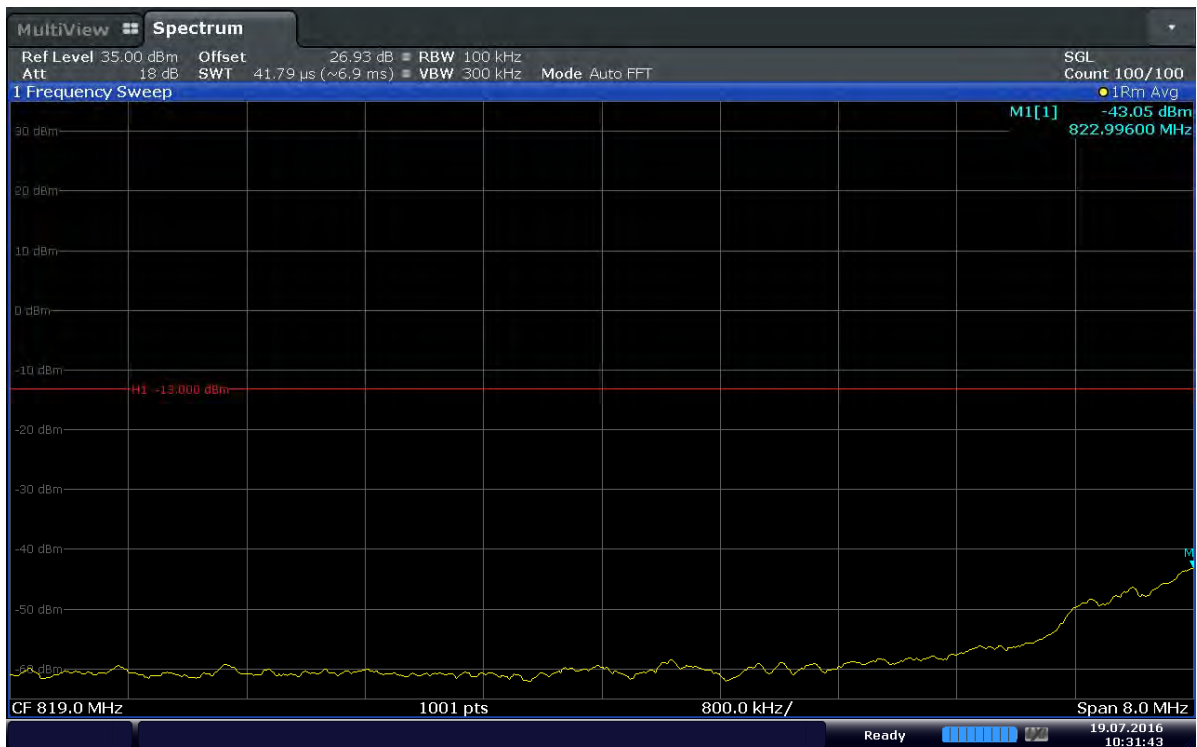


Date: 19 JUL 2016 10:31:44

Plot 6-22. Extended Lower Band Edge Plot (Band5 – 1.4MHz – QPSK – RB Size 6)

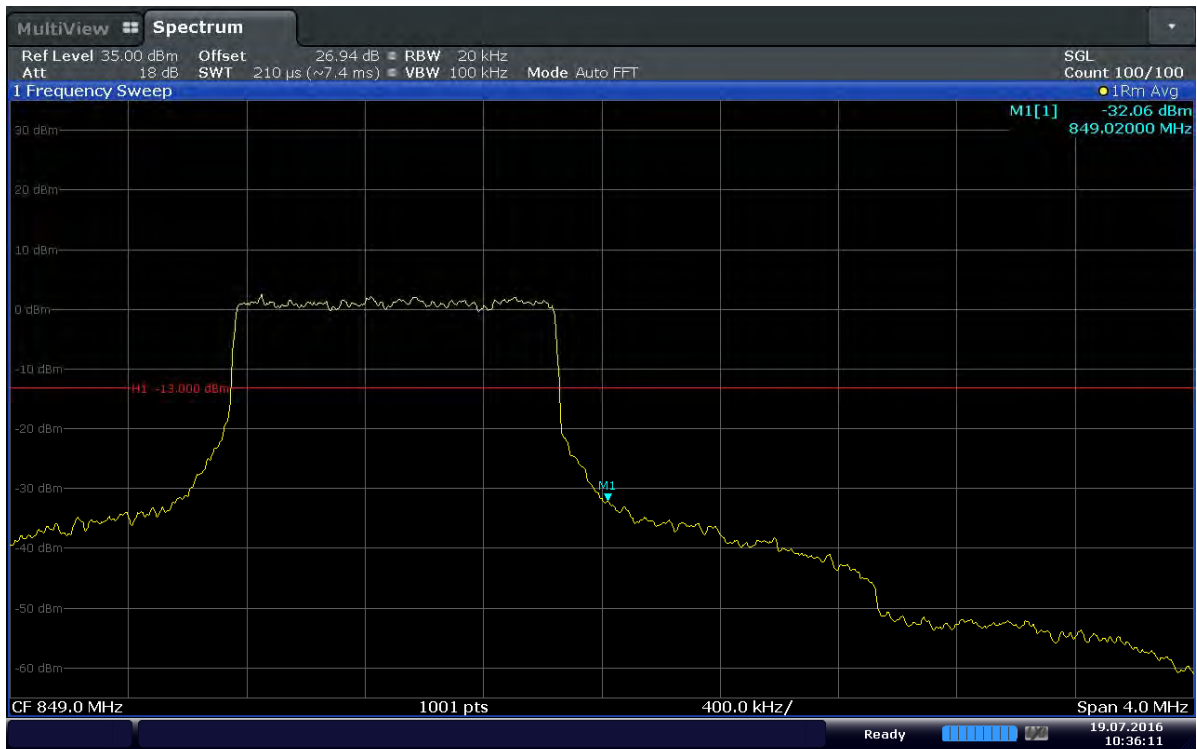

Date: 19.JUL.2016 10:36:11

Plot 6-23. Upper Band Edge Plot (Band5 – 1.4MHz – QPSK – RB Size 6)

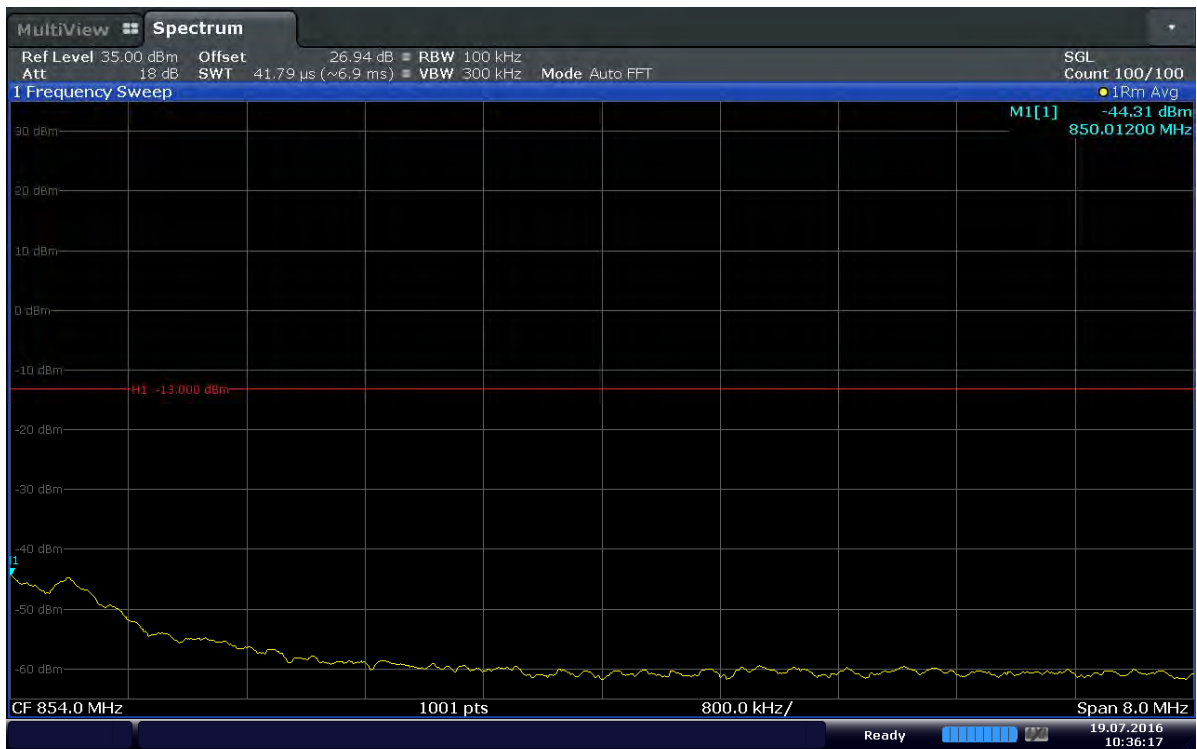


Date: 19.JUL.2016 10:36:17

Plot 6-24. Extended Upper Band Edge Plot (Band5 – 1.4MHz – QPSK – RB Size 6)



Issue Date:

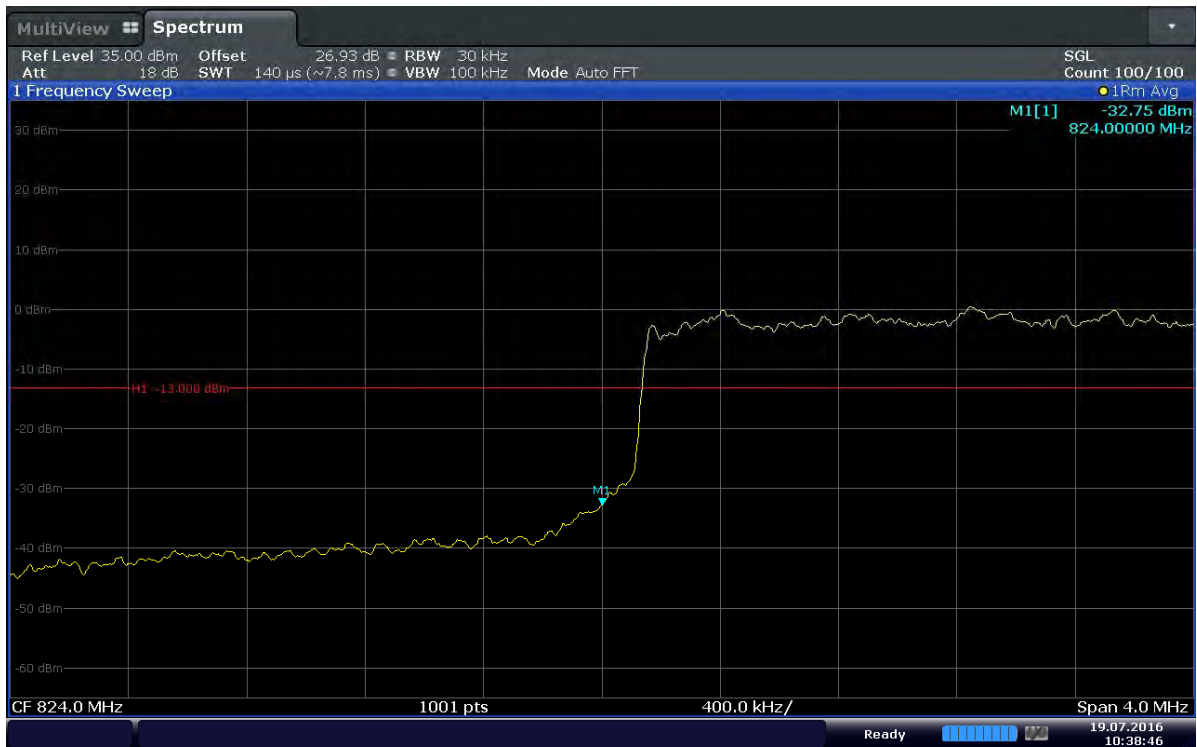


Date: 19.JUL.2016 10:38:47

Plot 6-25. Lower Band Edge Plot (Band 5 – 3.0MHz – QPSK – RB Size 15)



Date: 19.JUL.2016 10:38:53

Plot 6-26. Extended Lower Band Edge Plot (Band 5 – 3.0MHz – QPSK – RB Size 15)

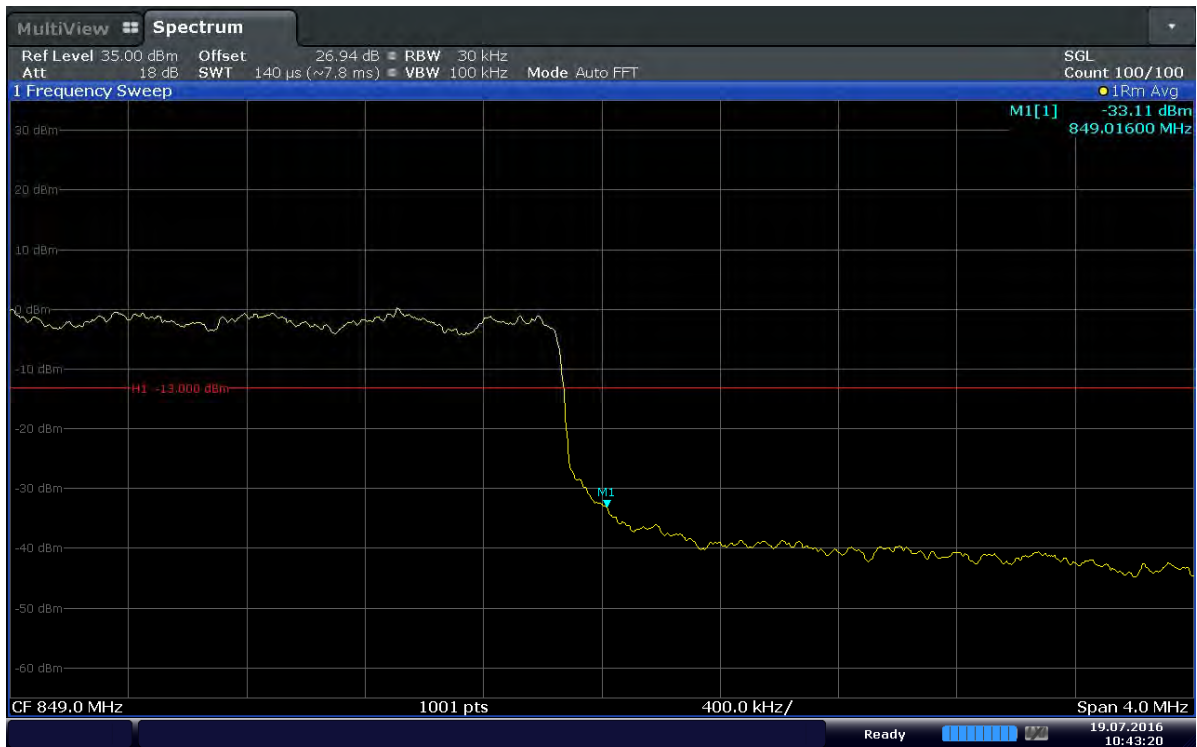


Date: 19 JUL 2016 10:43:20

Plot 6-27. Upper Band Edge Plot (Band 5 – 3.0MHz – QPSK – RB Size 15)



Date: 19 JUL 2016 10:43:26

Plot 6-28. Extended Upper Band Edge Plot (Band 5 – 3.0MHz – QPSK – RB Size 15)

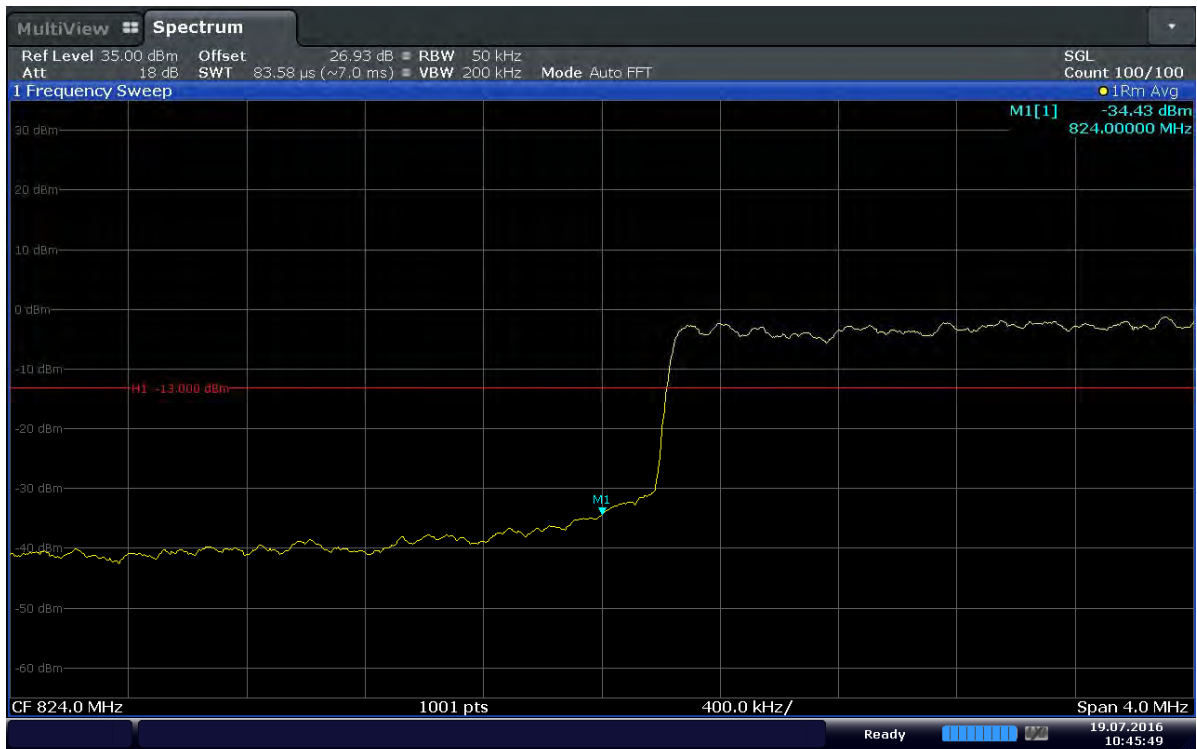

Date: 19 JUL 2016 10:45:49

Plot 6-29. Lower Band Edge Plot (Band 5 – 5.0MHz – QPSK – RB Size 25)



Date: 19 JUL 2016 10:45:55

Plot 6-30. Extended Lower Band Edge Plot (Band 5 – 5.0MHz – QPSK – RB Size 25)



Issue Date:




Date: 19.JUL.2016 10:50:22

Plot 6-31. Upper Band Edge Plot (Band 5 – 5.0MHz – QPSK – RB Size 25)




Date: 19.JUL.2016 10:50:28

Plot 6-32. Extended Upper Band Edge Plot (Band 5 – 5.0MHz – QPSK – RB Size 25)

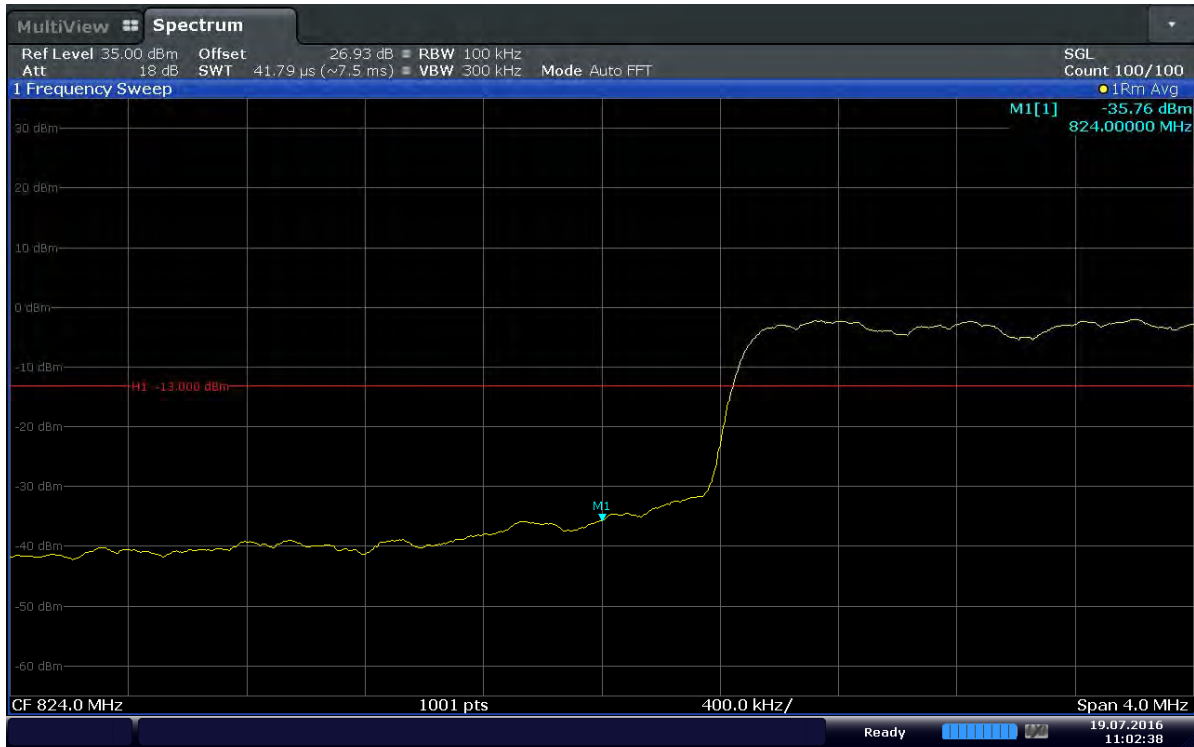


Date: 19 JUL 2016 11:02:38

Plot 6-33. Lower Band Edge Plot (Band 5 – 10.0MHz – QPSK – RB Size 50)

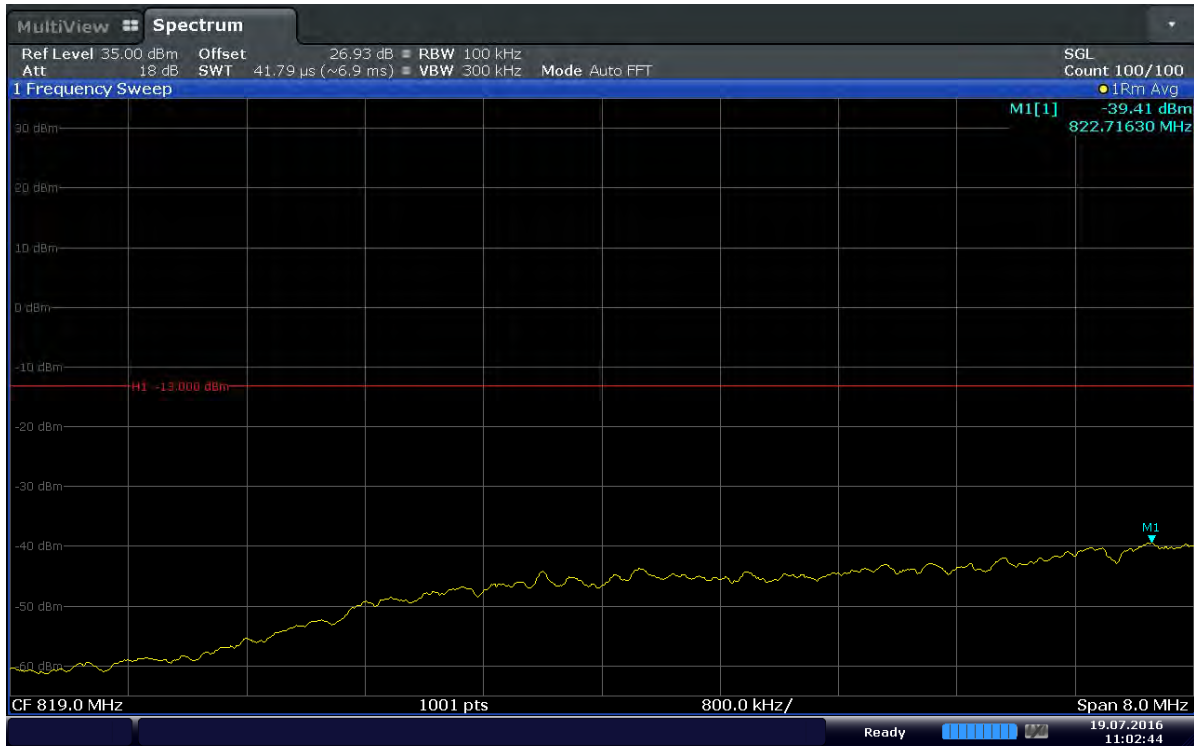


Date: 19 JUL 2016 11:02:44

Plot 6-34. . Extended Lower Band Edge Plot (Band 5 – 10.0MHz – QPSK – RB Size 50)

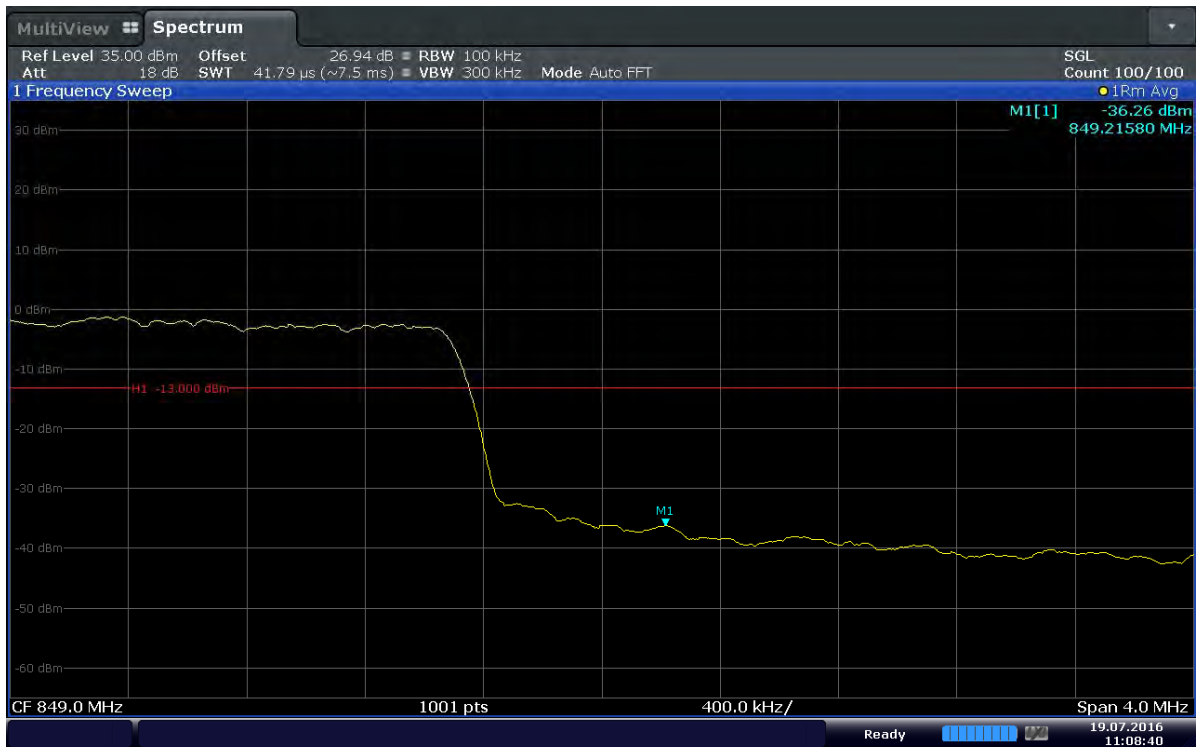


Date: 19.JUL.2016 11:08:40

Plot 6-35. Upper Band Edge Plot (Band 5 – 10.0MHz – QPSK – RB Size 50)

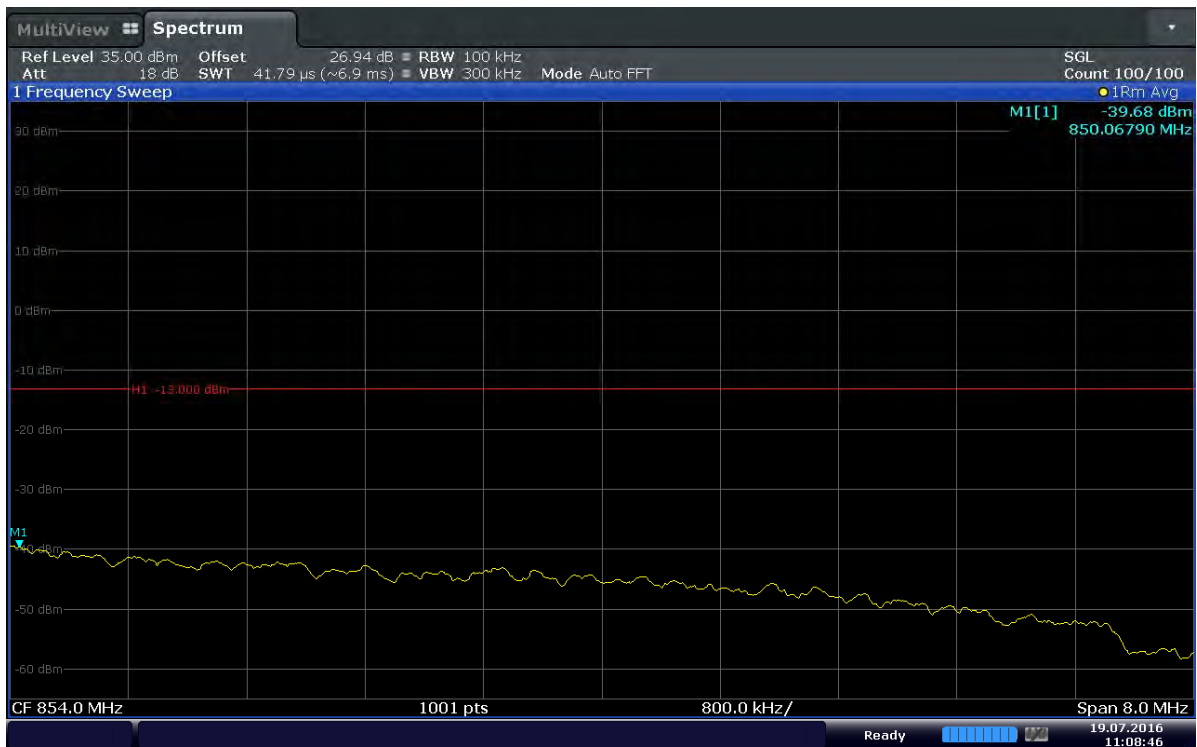


Date: 19.JUL.2016 11:08:46

Plot 6-36. Extended Upper Band Edge Plot (Band 5 – 10.0MHz – QPSK – RB Size 50)

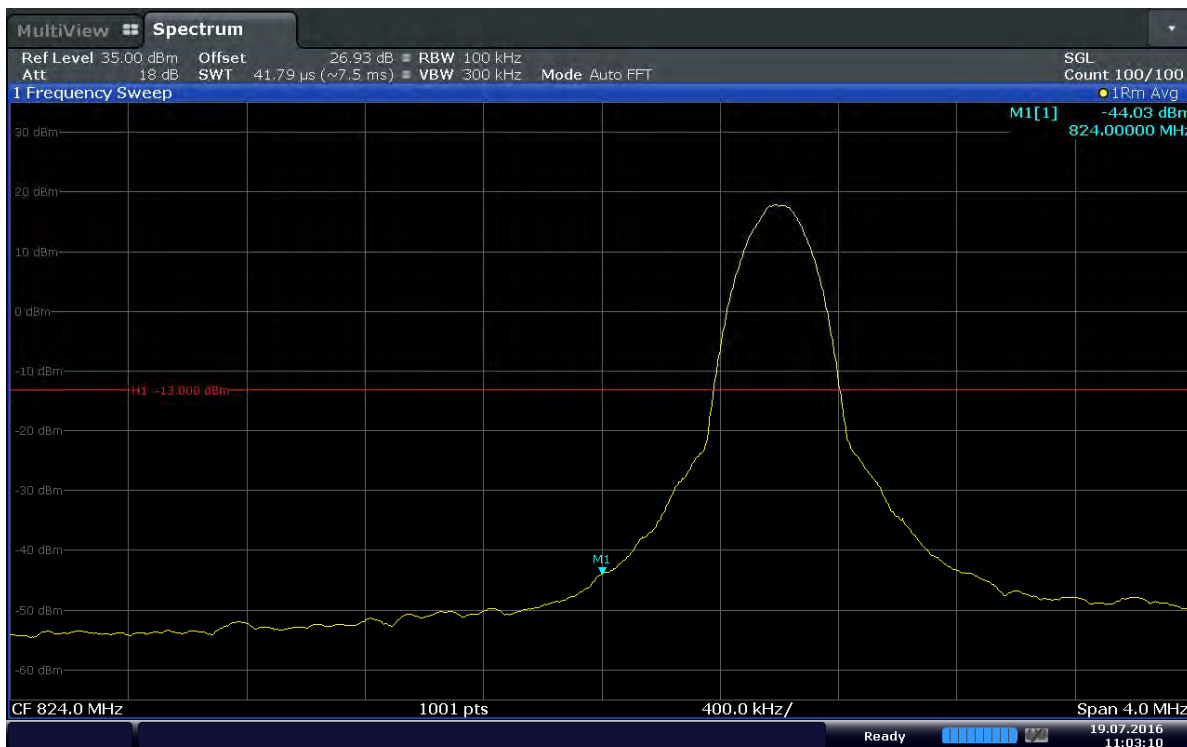

Date: 19.JUL.2016 11:03:11

Plot 6-37. Lower Band Edge Plot (Band 5 – 10.0MHz – QPSK – RB Size 1 – RB Offset 0)

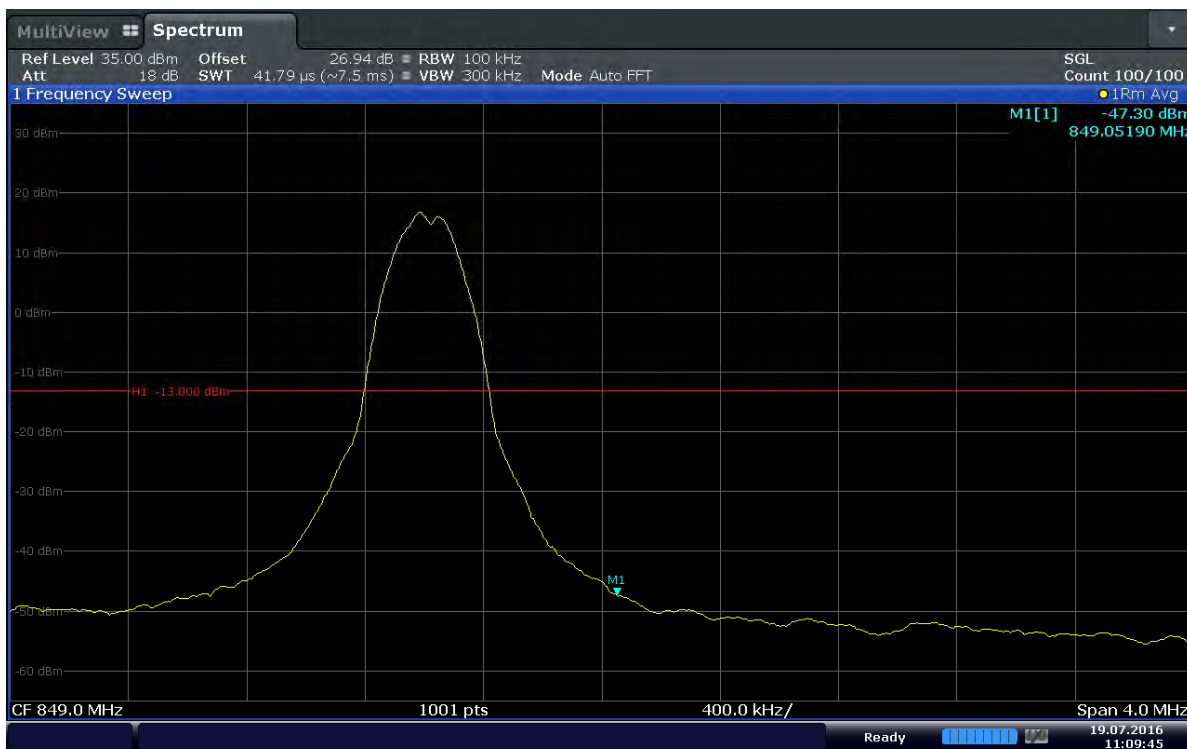

Date: 19.JUL.2016 11:09:45

Plot 6-38. Upper Band Edge Plot (Band 5 – 10.0MHz – QPSK – RB Size 1 – RB Offset 49)



6.5. Frequency Stability / Temperature Variation  
§2.1055 §22.355

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

1. Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
2. Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for other than hand carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point(=Batt.End) which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-D-2010

Test Settings

1. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of time sufficient to stabilize EUT at each temperature level shall be allowed prior to frequency measurement.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

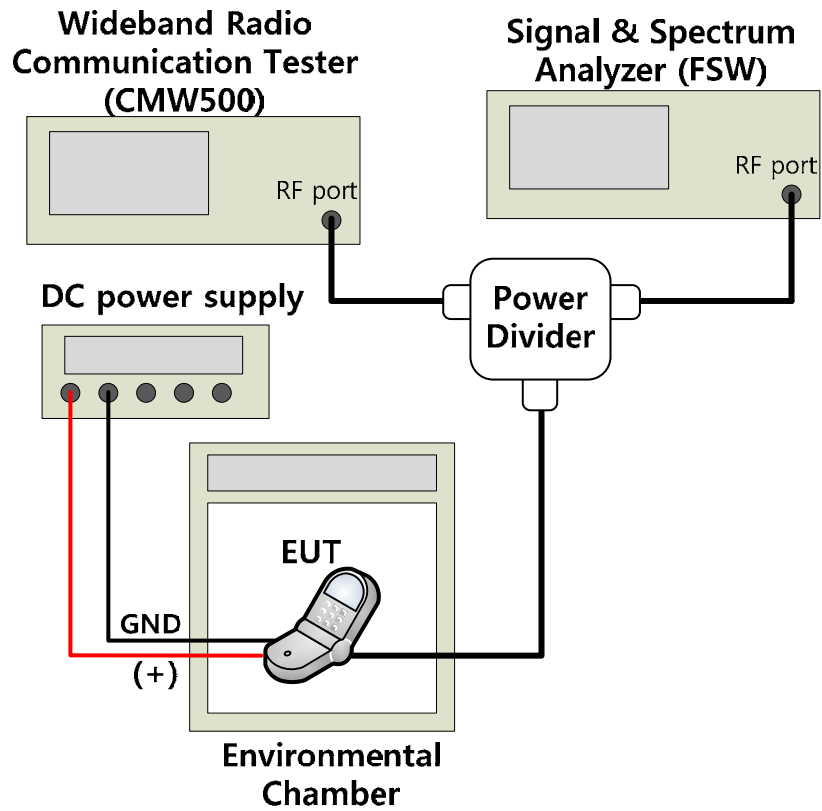


Figure 6-4. Test Instruments & Measurement Setup

Test Notes

1. MCF is the Measured Carrier Frequency  
ACF is the Assigned Carrier Frequency
2. Calculate the ppm frequency error by the following:

$$\text{ppm error} = \left( \frac{\text{MCF}_{[\text{MHz}]}}{\text{ACF}_{[\text{MHz}]}} - 1 \right) \times 10^6$$



Issue Date:

Mode : LTE Band 5  
 Channel : 20425  
 Operating Frequency : 826.5 MHz  
 Reference Voltage : 3.85 VDC

Voltage [%]	Power [VDC]	Temp [°C]	ACF [MHz]	MCF [MHz]	Freq. Dev. [Hz]	ppm error	Limit [ppm]
100 %	3.85	-30	826.5	826.499994	-6.08	-0.007	±2.5
		-20	826.5	826.499995	-4.95	-0.006	
		-10	826.5	826.499995	-5.01	-0.006	
		0	826.5	826.499995	-5.29	-0.006	
		+10	826.5	826.499995	-4.81	-0.006	
		+20	826.5	826.499994	-6.27	-0.008	
		+30	826.5	826.499994	-5.72	-0.007	
		+40	826.5	826.499995	-5.19	-0.006	
Batt.End	3.40	+20	826.5	826.499996	-3.98	-0.005	

Table 6-2. Frequency Stability Data

- End of this page -



6.6. Radiated Power (ERP)  
§22.913(a.2)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedure Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto"
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

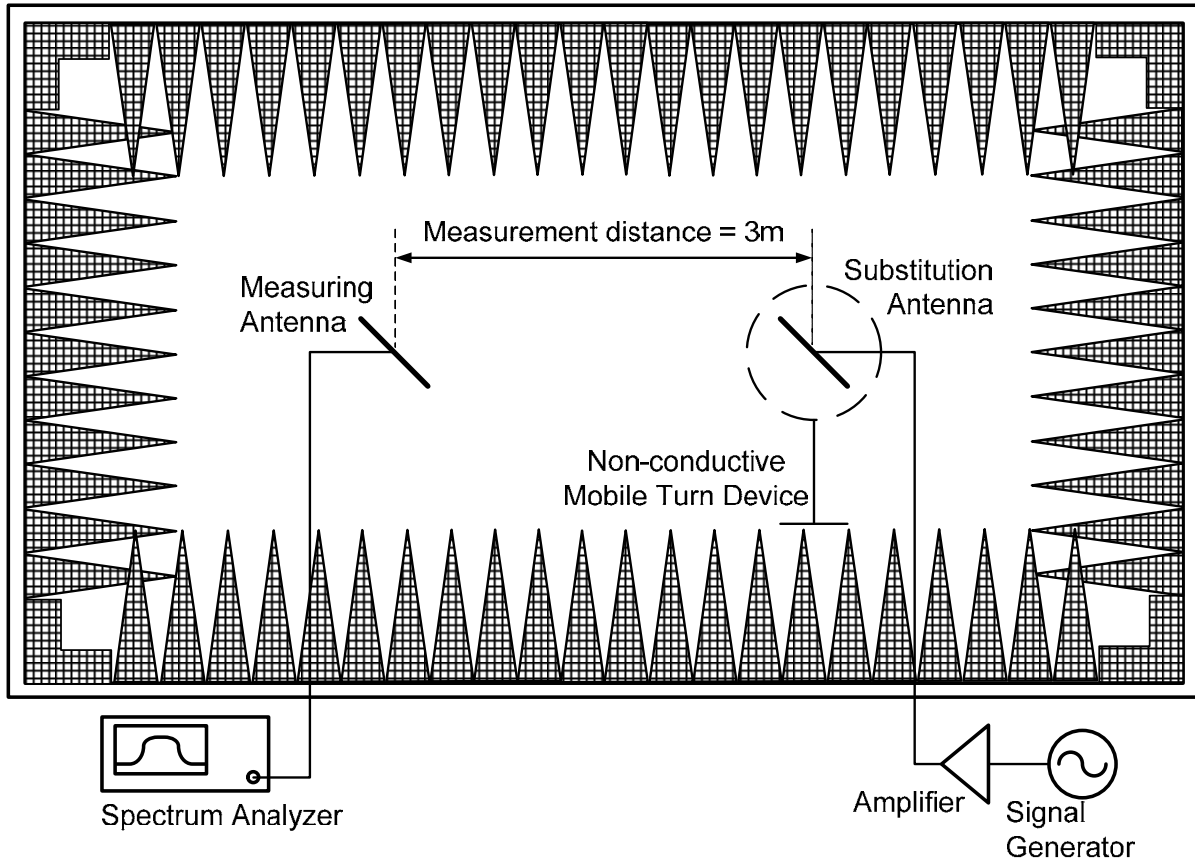


Figure 6-7. Test Instruments & Measurement Setup

### Test Notes

1. The EUT was tested with Turn Device and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.



Test Results

Channel	Channel BW [MHz]	Mod.	RB Size /Offset	Ant Pol (H/V)	EUT POL [degree]		S/A Reading [dBm]	S/G Level [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	ERP [dBm]	Limit [dBm]	Margin [dB]
					Azimuth	Elevation							
20407	1.4	QPSK	3/3	H	90	0	-16.69	13.88	2.30	5.32	16.90	38.45	21.55
20407	1.4	16QAM	3/3	H	90	0	-18.02	12.55	2.30	5.32	15.57	38.45	22.88
20525	1.4	QPSK	3/0	H	88	0	-17.24	15.12	2.30	5.25	18.07	38.45	20.38
20525	1.4	16QAM	1/2	H	88	0	-18.43	13.93	2.30	5.25	16.88	38.45	21.57
20643	1.4	QPSK	3/2	H	81	0	-18.93	13.42	2.32	5.21	16.31	38.45	22.14
20643	1.4	16QAM	1/2	H	81	0	-19.68	12.67	2.32	5.21	15.56	38.45	22.89
20415	3	QPSK	1/7	H	83	0	-16.82	13.77	2.29	5.29	16.77	38.45	21.68
20415	3	16QAM	1/7	H	83	0	-17.05	13.54	2.29	5.29	16.54	38.45	21.91
20525	3	QPSK	1/7	H	87	0	-17.23	15.13	2.30	5.25	18.08	38.45	20.37
20525	3	16QAM	1/14	H	87	0	-18.02	14.34	2.30	5.25	17.29	38.45	21.16
20635	3	QPSK	1/7	H	86	0	-19.06	13.29	2.32	5.21	16.18	38.45	22.27
20635	3	16QAM	1/7	H	86	0	-19.99	12.36	2.32	5.21	15.25	38.45	23.20
20425	5	QPSK	1/12	H	92	5	-17.92	12.99	2.29	5.29	15.99	38.45	22.46
20425	5	16QAM	1/12	H	92	5	-19.15	11.76	2.29	5.29	14.76	38.45	23.69
20525	5	QPSK	1/12	H	87	0	-16.98	15.38	2.30	5.25	18.33	38.45	20.12
20525	5	16QAM	1/12	H	87	0	-18.44	13.92	2.30	5.25	16.87	38.45	21.58
20625	5	QPSK	1/12	H	89	0	-17.31	15.04	2.32	5.21	17.93	38.45	20.52
20625	5	16QAM	1/0	H	89	0	-18.29	14.06	2.32	5.21	16.95	38.45	21.50
20450	10	QPSK	1/49	H	83	0	-17.23	13.68	2.29	5.29	16.68	38.45	21.77
20450	10	16QAM	1/25	H	324	200	-18.14	12.77	2.29	5.29	15.77	38.45	22.68
20525	10	QPSK	1/25	H	77	0	-16.89	15.47	2.30	5.25	18.42	38.45	20.03
20525	10	16QAM	1/0	H	80	0	-17.92	14.44	2.30	5.25	17.39	38.45	21.06
20600	10	QPSK	1/25	H	80	5	-17.23	15.06	2.30	5.25	18.01	38.45	20.44
20600	10	16QAM	1/25	H	320	197	-17.90	14.39	2.30	5.25	17.34	38.45	21.11

Table 6-3. ERP (LTE Band 5)

- End of this page -



6.7. Radiated Spurious Emissions Measurements  
§2.1053 §22.917(a)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedure Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. No. of sweep points  $\geq$  Span / RBW
4. Detector = Max Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

– End of this page –

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

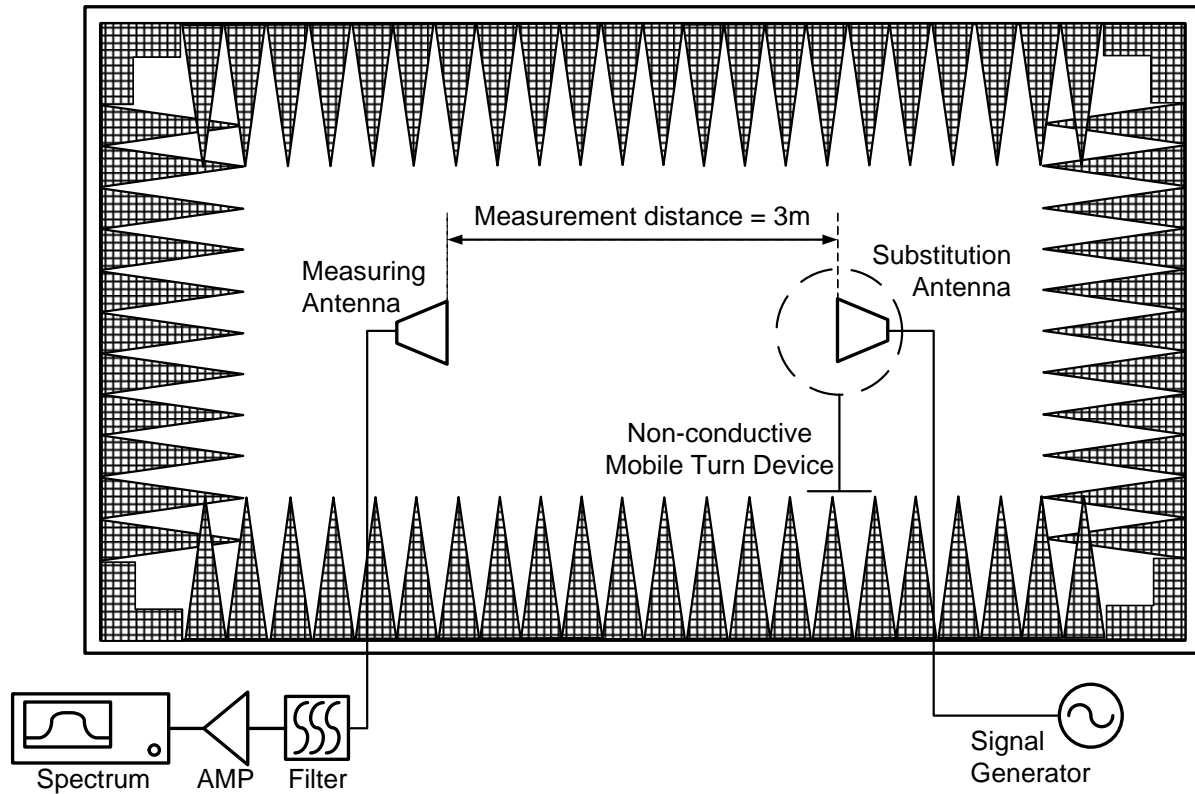


Figure 6-8. Test Instruments & Measurement Setup

Test Notes

1. The EUT was tested with Turn Device and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.



Issue Date:

Test Results

Operating Frequency : 824.7 MHz  
 Channel : 20407  
 Measured Output Power : 16.90 dBm = 0.049 Watt  
 Modulation Signal : QPSK  
 Band Width : 1.4 MHz  
 RB Size / Offset : 3 / 3  
 Distance : 3 Meters  
 Limit :  $43 + 10 \log_{10}(W)$  = 29.90 dBc  
 RSE Limit : -13 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	RSE Level [dBm]
		Azimuth	Elevation					
1649.9	H	99	292	-49.08	-51.03	3.25	8.86	-45.42
2475.0	H	360	300	-57.40	-55.74	4.04	9.91	-49.87
3299.7	H	19	360	-61.87	-55.09	4.76	9.61	-50.24
4123.5	H	Noise floor		-62.49	-52.27	5.36	9.89	-47.74

Table 6-4. Radiated Spurious Data – Low Channel

Operating Frequency : 836.5 MHz  
 Channel : 20525  
 Measured Output Power : 18.42 dBm = 0.070 Watt  
 Modulation Signal : QPSK  
 Band Width : 10 MHz  
 RB Size / Offset : 1 / 25  
 Distance : 3 meters  
 Limit :  $43 + 10 \log_{10}(W)$  = 31.42 dBc  
 RSE Limit : -13 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	RSE Level [dBm]
		Azimuth	Elevation					
1673.1	H	216	86	-49.31	-51.26	3.25	8.86	-45.65
2509.9	H	353	0	-53.18	-51.52	4.04	9.91	-45.65
3346.0	H	Noise floor		-62.49	-55.97	4.78	9.60	-51.15

Table 6-5. Radiated Spurious Data – Mid Channel



Issue Date:

Operating Frequency : 844.0 MHz  
Channel : 20600  
Measured Output Power : 18.01 dBm = 0.063 Watt  
Modulation Signal : QPSK  
Band Width : 10 MHz  
RB Size / Offset : 1 / 25  
Distance : 3 meters  
Limit :  $43 + 10 \log_{10}(W)$  = 31.01 dBc  
RSE Limit : -13 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	RSE Level [dBm]
		Azimuth	Elevation					
1688.1	H	204	64	-50.61	-53.13	3.37	9.24	-47.26
2532.2	H	293	52	-58.49	-56.46	4.19	9.70	-50.95
3376.0	H	Noise floor		-60.23	-53.85	4.81	9.59	-49.07

Table 6-6. Radiated Spurious Data – High Channel

– End of this page –



## **7. CONCLUSION**

The data collected relate only the item(s) tested and show that the Samsung Portable Handset FCC ID: A3LSMG6100 compliance with all the requirements of Parts 2, 22 of the FCC rules.

– End of this report –