

FCC LTE REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

September 08, 2020

Address:

129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:

HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2008-FC082-R1

FCC ID: A3LSMG781U

APPLICANT: SAMSUNG Electronics Co., Ltd.

**According to the Evaluation report, all of the data contained herein is reused from the reference
 FCC ID : A3LSMG781V report.**

Model(s): SM-G781U
 Additional Model(s): SM-G781U1/DS, SM-G781W
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band13 (5)	779.5 –784.5	4M51G7D	QPSK	0.139	21.43
		4M48W7D	16QAM	0.117	20.70
		4M50W7D	64QAM	0.093	19.69
LTE – Band13 (10)	782.0	8M96G7D	QPSK	0.141	21.50
		8M94W7D	16QAM	0.120	20.81
		8M96W7D	64QAM	0.078	18.91

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2008-FC082-R1

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2008-FC082	August 27, 2020	- First Approval Report
HCT-RF-2008-FC082-R1	September 08, 2020	- Revised the radiated spurious and harmonics emissions FCC rule part.(Page 19)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION.....	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY.....	6
3. DESCRIPTION OF TESTS	7
3.1 TEST PROCEDURE.....	7
3.2 RADIATED POWER	8
3.3 RADIATED SPURIOUS EMISSIONS.....	9
3.4 OCCUPIED BANDWIDTH.....	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.6 BAND EDGE	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	13
3.8 WORST CASE(RADIATED TEST).....	14
3.9 WORST CASE(CONDUCTED TEST).....	15
4. LIST OF TEST EQUIPMENT.....	16
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION	20
8. TEST DATA	22
8.1 EFFECTIVE RADIATED POWER	22
8.2 RADIATED SPURIOUS EMISSIONS.....	23
8.3 OCCUPIED BANDWIDTH.....	26
8.4 CONDUCTED SPURIOUS EMISSIONS	27
8.5 BAND EDGE	27
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	28
9. TEST PLOTS.....	32
10. APPENDIX A_ TEST SETUP PHOTO.....	55

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG781U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-G781U
Additional Model(s):	SM-G781U1/DS, SM-G781W
Tx Frequency:	779.5 MHz – 784.5 MHz (LTE – Band 13 (5MHz)) 782 MHz (LTE – Band 13 (10 MHz))
Date(s) of Tests:	July 06, 2020 ~ August 12, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6. It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

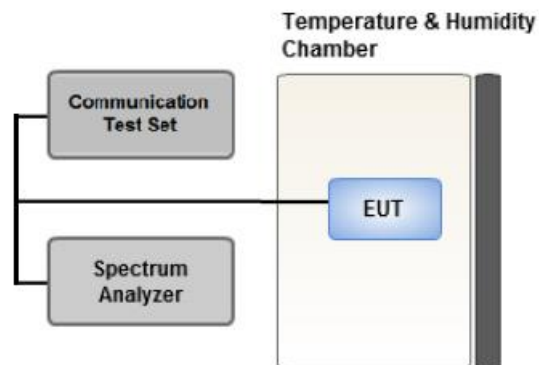

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

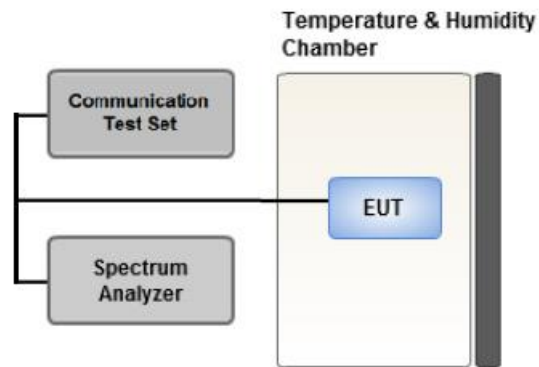

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.6 BAND EDGE

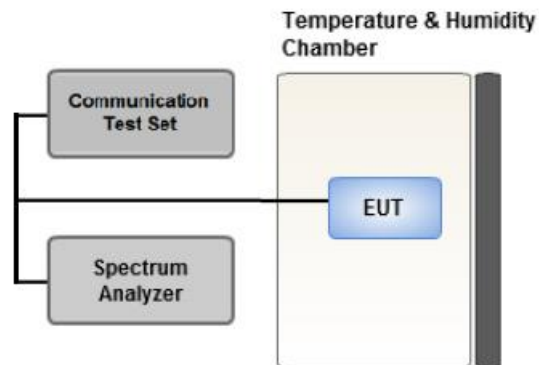

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

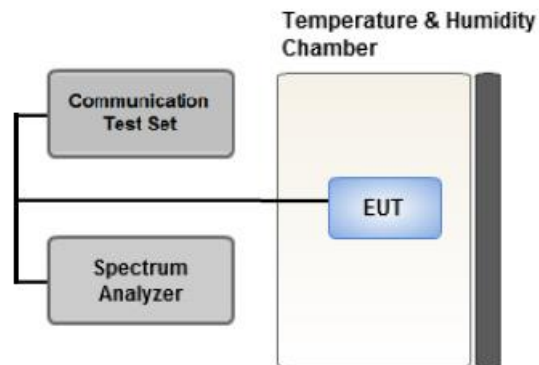

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20°C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- SM-G781U & additional models were tested and the worst case results are reported.
(Worst case : SM-G781U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

-SM-G781U & additional models were tested and the worst case results are reported.

(Worst case : SM-G781U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	5, 10	Mid	Full RB	0
Band Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
5, 10	Low, High	Full RB	0		
	Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10	Low, Mid, High	1

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/19/2020	Annual	03/19/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY4004427	09/27/2019	Annual	09/27/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/05/2019	Annual	09/05/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(c)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
On all frequencies between 763-775 MHz and 793-805 MHz.	§27.53(c)(4)	< 65 + 10log10 (P[Watts])	PASS (See Note3)
Conducted Output Power	§2.1046	N/A	See Note1
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC
3. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(b)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(c)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Undesirable Emissions in the 1559 – 1610 MHz band	§2.1053, 27.53(f)	< -70dBW/MHz EIRP (wideband) < -80dBW EIRP (narrowband)	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
779.5	LTE B13 (5 MHz)	QPSK	-29.28	32.72	-10.08	1.36	H	< 3.00	0.134	21.28
		16-QAM	-30.01	31.99	-10.08	1.36	H		0.114	20.55
		64-QAM	-31.97	30.03	-10.08	1.36	H		0.072	18.59
782.0		QPSK	-29.41	32.79	-10.09	1.36	H		0.136	21.34
		16-QAM	-30.06	32.14	-10.09	1.36	H		0.117	20.69
		64-QAM	-31.09	31.11	-10.09	1.36	H		0.092	19.66
784.5		QPSK	-29.44	32.88	-10.10	1.36	H		0.139	21.43
		16-QAM	-30.17	32.15	-10.10	1.36	H		0.117	20.70
		64-QAM	-31.18	31.14	-10.10	1.36	H		0.093	19.69

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
782.0	LTE B13 (10 MHz)	QPSK	-29.25	32.95	-10.09	1.36	H	< 3.00	0.141	21.50
		16-QAM	-29.94	32.26	-10.09	1.36	H		0.120	20.81
		64-QAM	-31.84	30.36	-10.09	1.36	H		0.078	18.91

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B13
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
23205 (779.5)	1,559.0	-56.06	8.93	-62.91	1.94	V	-55.92	-13.00
	2,338.5	-49.47	9.83	-51.69	2.41	H	-44.27	-13.00
	3,118.0	-51.83	11.15	-52.06	2.82	H	-43.73	-13.00
23230 (782.0)	1,564.0	-55.85	8.99	-62.86	1.94	V	-55.81	-13.00
	2,346.0	-49.22	9.87	-51.37	2.41	H	-43.92	-13.00
	3,128.0	-51.96	11.15	-52.41	2.81	V	-44.07	-13.00
23255 (784.5)	1,569.0	-55.67	9.05	-62.85	1.94	V	-55.74	-13.00
	2,353.5	-49.19	9.94	-51.32	2.41	V	-43.79	-13.00
	3,138.0	-52.00	11.18	-51.98	2.82	H	-43.62	-13.00

MODE: LTE B13
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
23230 (782.0)	1,564.0	-55.56	8.99	-62.57	1.94	V	-55.52	-13.00
	2,346.0	-49.04	9.87	-51.19	2.41	H	-43.74	-13.00
	3,128.0	-51.82	11.15	-52.27	2.81	H	-43.93	-13.00

1559 MHz ~ 1610 MHz BAND

- ▣ OPERATING FREQUENCY: 779.5 MHz, 782.0 MHz, 784.5 MHz
- ▣ MEASURED OUTPUT POWER: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -80 dBW/ MHz (= -50 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Margin (dB)
779.5	1603.52	Narrow Band	-64.05	9.32	-72.78	1.98	H	-65.44	15.44
782.0	1601.88		-63.99	9.30	-72.70	1.98	H	-65.38	15.38
784.5	1605.34		-63.89	9.35	-72.73	1.99	H	-65.37	15.37

Note:

The lower narrowband limit was applied because the spurious emission was not found.

- ▣ OPERATING FREQUENCY: 782.0 MHz
- ▣ MEASURED OUTPUT POWER: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -80 dBW/ MHz (= -50 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Margin (dB)
782.0	1607.21	Narrow Band	-63.59	9.35	-72.53	1.99	H	-65.17	15.17

Note:

The lower narrowband limit was applied because the spurious emission was not found.

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
13	5 MHz	782.0	QPSK	25	0	4.5075
			16-QAM	25	0	4.4838
			64-QAM	25	0	4.5009
	10 MHz		QPSK	50	0	8.9594
			16-QAM	50	0	8.9431
			64-QAM	50	0	8.9625

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 33 ~ 38.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
13	5	779.5	3.7034	27.976	-67.061	-39.085	-13.00
		782.0	3.7179	27.976	-67.514	-39.538	
		784.5	3.7099	27.976	-67.235	-39.259	
	10	782.0	3.6955	27.976	-67.193	-39.217	

Note:

1. Plots of the EUT’s Conducted Spurious Emissions are shown Page 51 ~ 54.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT’s Band Edge are shown Page 39 ~ 50.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 779,500,000 Hz
- ▣ CHANNEL: 23205 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	779 500 010	0.00	0.000 000	0.0000
100%		-30	779 500 016	6.10	0.000 001	0.0078
100%		-20	779 500 019	9.50	0.000 001	0.0122
100%		-10	779 500 007	-2.70	0.000 000	-0.0035
100%		0	779 500 013	2.90	0.000 000	0.0037
100%		+10	779 500 021	11.00	0.000 001	0.0141
100%		+30	779 500 015	5.50	0.000 001	0.0071
100%		+40	779 500 008	-2.00	0.000 000	-0.0026
100%		+50	779 500 016	6.10	0.000 001	0.0078
Batt. Endpoint		3.400	+20	779 500 020	10.60	0.000 001

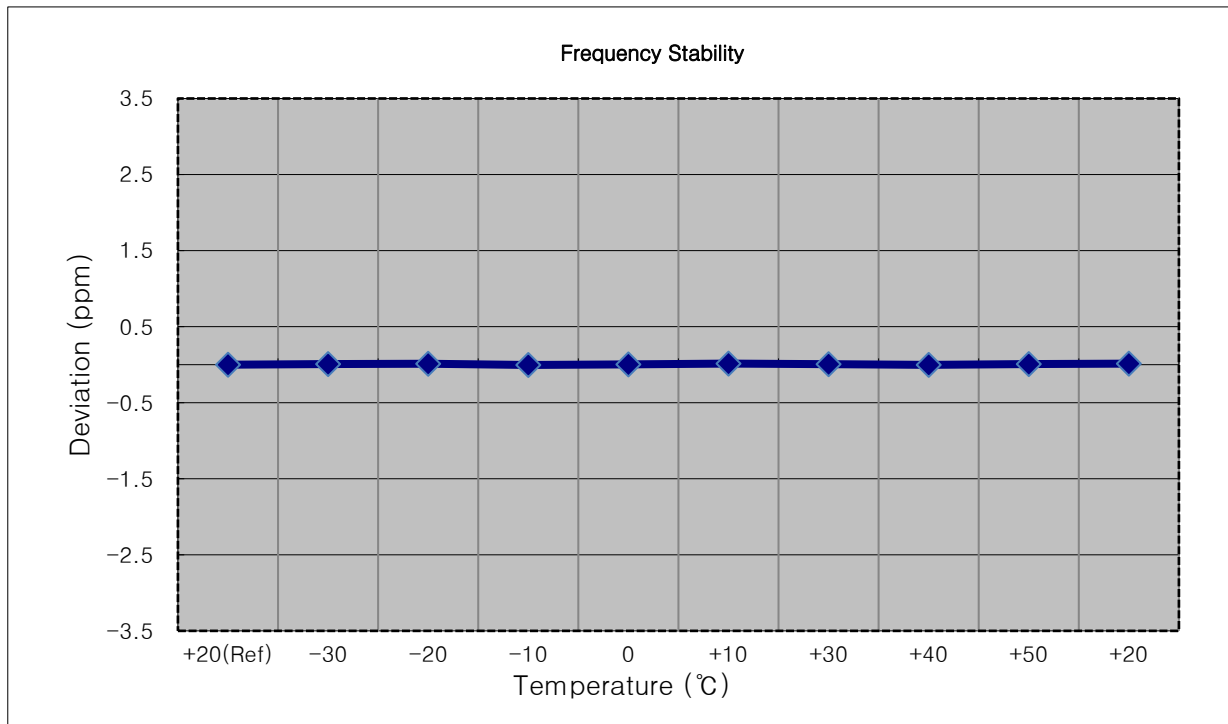


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	782 000 003	0.00	0.000 000	0.0000
100%		-30	782 000 007	4.50	0.000 001	0.0058
100%		-20	782 000 009	6.20	0.000 001	0.0079
100%		-10	782 000 009	6.00	0.000 001	0.0077
100%		0	782 000 006	3.50	0.000 000	0.0045
100%		+10	782 000 005	1.90	0.000 000	0.0024
100%		+30	782 000 010	7.40	0.000 001	0.0095
100%		+40	782 000 010	7.10	0.000 001	0.0091
100%		+50	782 000 008	5.10	0.000 001	0.0065
Batt. Endpoint	3.400	+20	782 000 012	9.60	0.000 001	0.0123

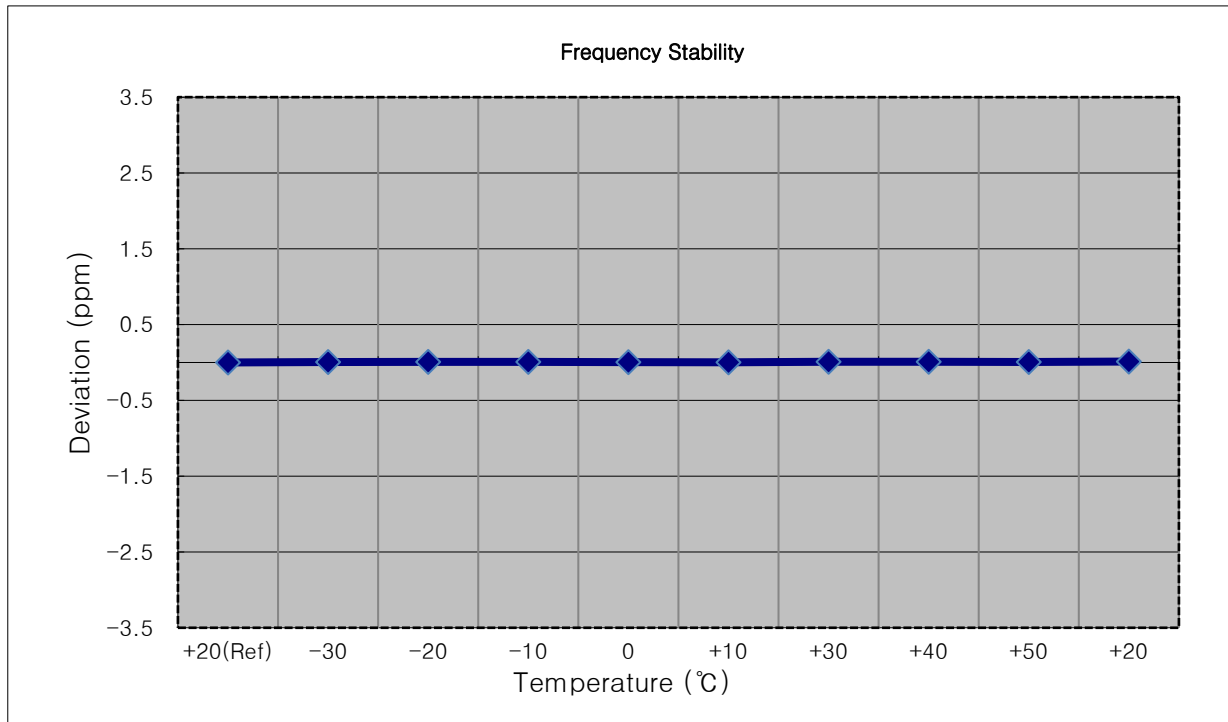


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 784,500,000 Hz
- ▣ CHANNEL: 23255 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	784 500 008	0.00	0.000 000	0.0000
100%		-30	784 500 004	-3.80	0.000 000	-0.0048
100%		-20	784 500 001	-7.70	-0.000 001	-0.0098
100%		-10	784 500 001	-7.50	-0.000 001	-0.0096
100%		0	784 499 998	-10.60	-0.000 001	-0.0135
100%		+10	784 499 997	-11.50	-0.000 001	-0.0147
100%		+30	784 500 004	-3.90	0.000 000	-0.0050
100%		+40	784 500 005	-2.80	0.000 000	-0.0036
100%		+50	784 499 998	-10.40	-0.000 001	-0.0133
Batt. Endpoint	3.400	+20	784 499 999	-9.30	-0.000 001	-0.0119

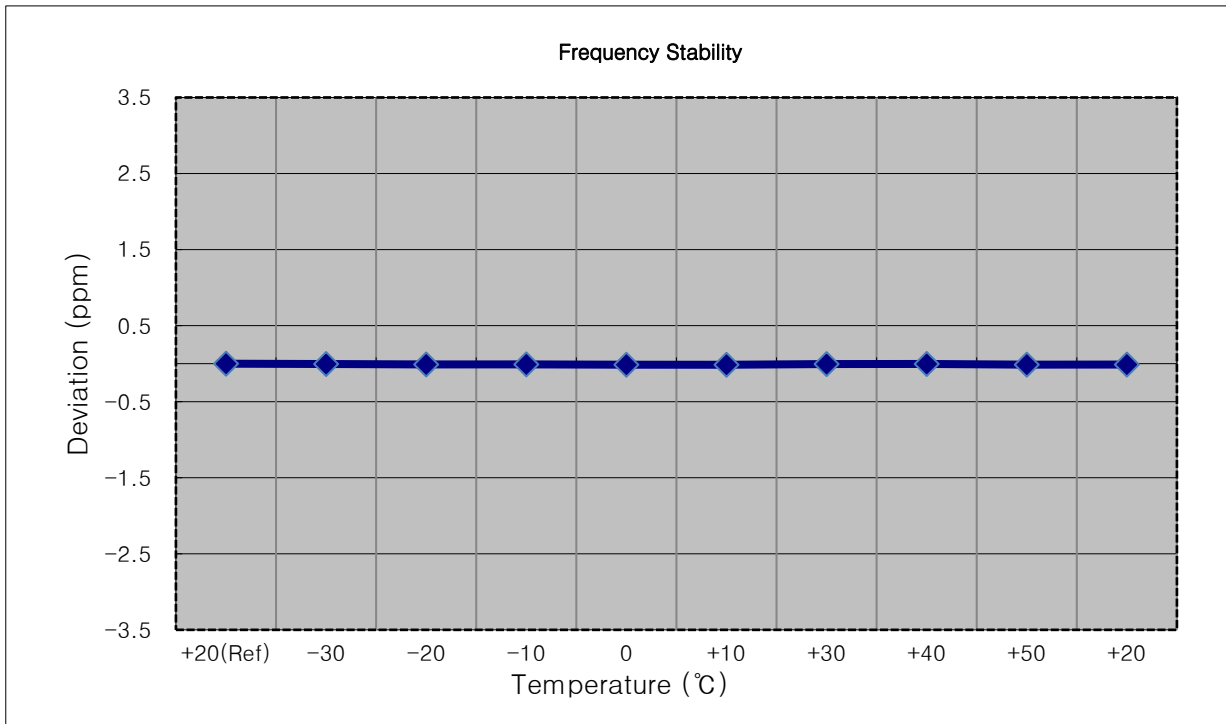


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	781 999 998	0.00	0.000 000	0.0000
100%		-30	781 999 995	-3.40	0.000 000	-0.0043
100%		-20	781 999 993	-5.40	-0.000 001	-0.0069
100%		-10	781 999 994	-3.70	0.000 000	-0.0047
100%		0	781 999 991	-7.10	-0.000 001	-0.0091
100%		+10	782 000 002	3.60	0.000 000	0.0046
100%		+30	781 999 988	-9.70	-0.000 001	-0.0124
100%		+40	781 999 991	-6.60	-0.000 001	-0.0084
100%		+50	781 999 993	-4.90	-0.000 001	-0.0063
Batt. Endpoint	3.400	+20	781 999 995	-2.60	0.000 000	-0.0033

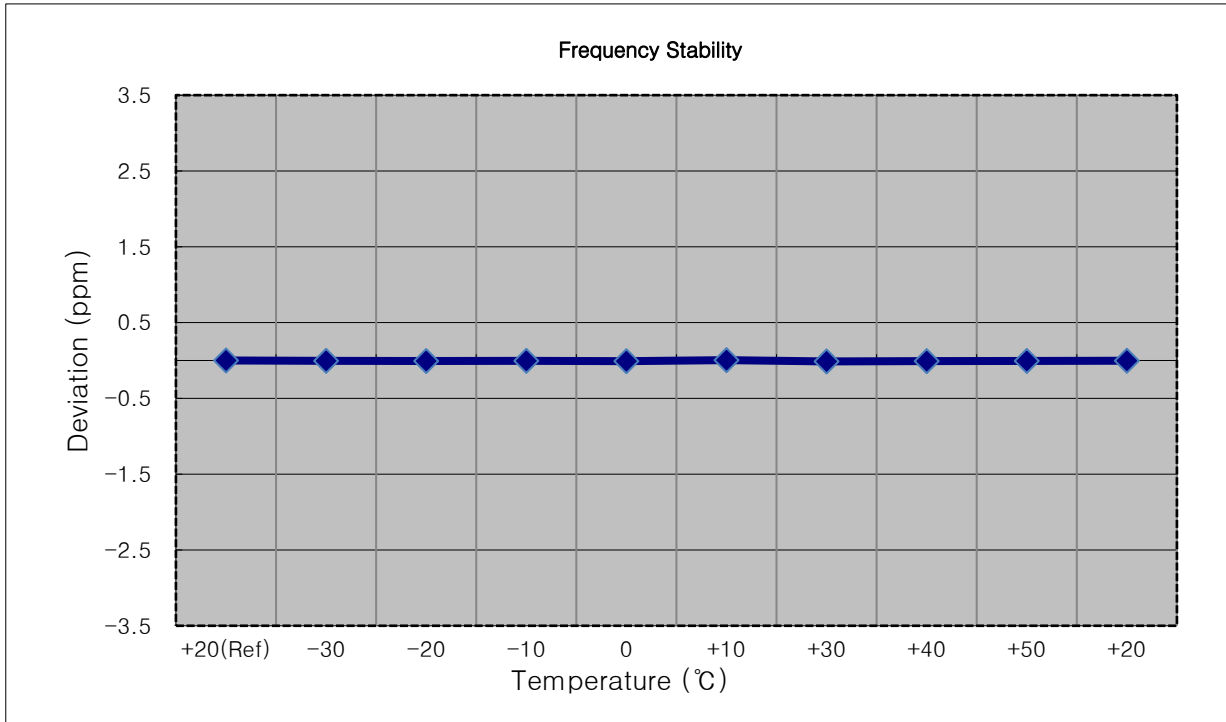


9. TEST PLOTS


BAND 13. Occupied Bandwidth Plot (Ch.23230 QPSK RB 25) 5 MHz

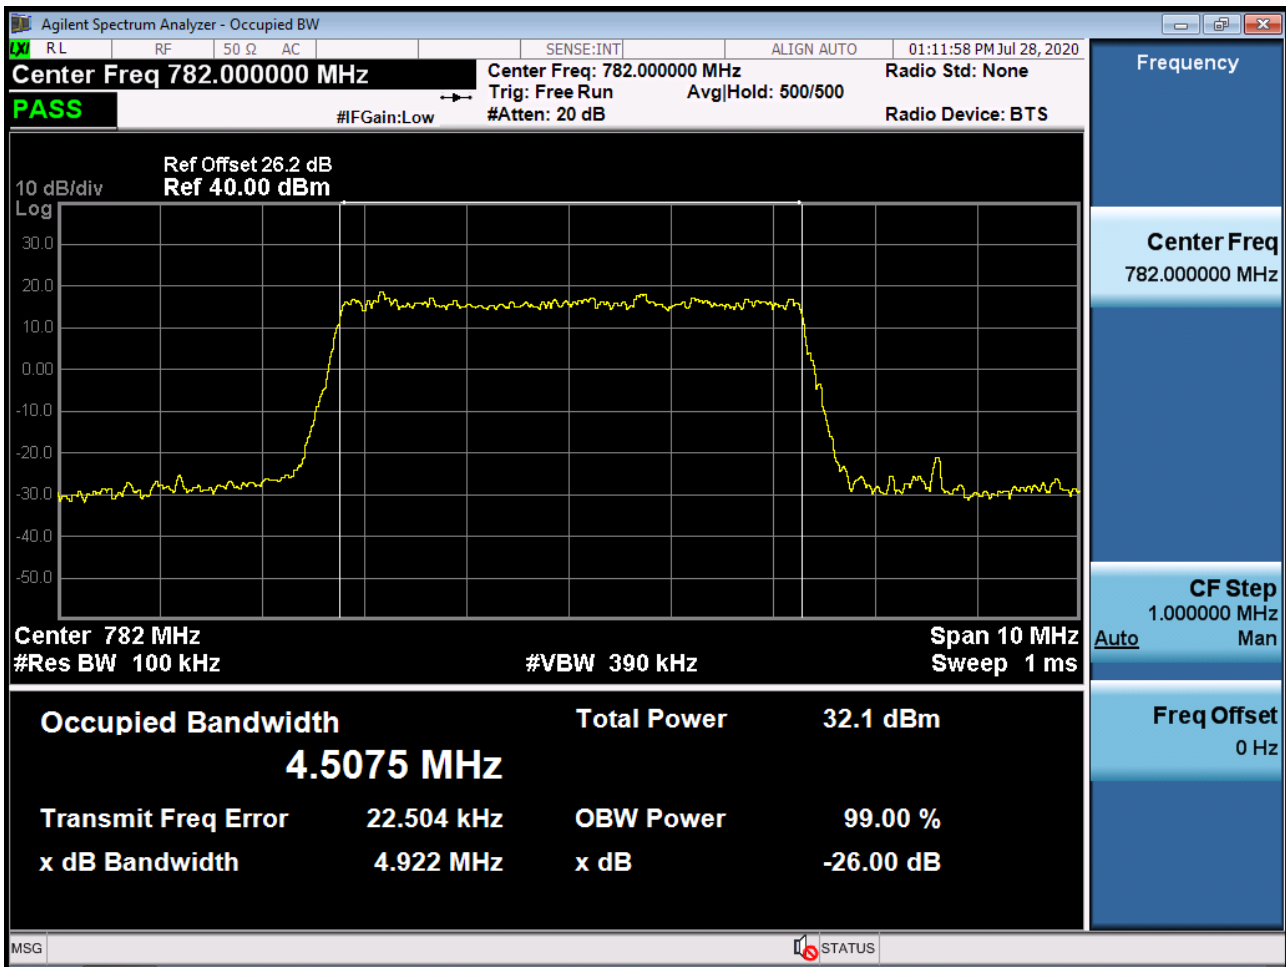


BAND 13. Occupied Bandwidth Plot (Ch.23230 16-QAM RB 25) 5 MHz

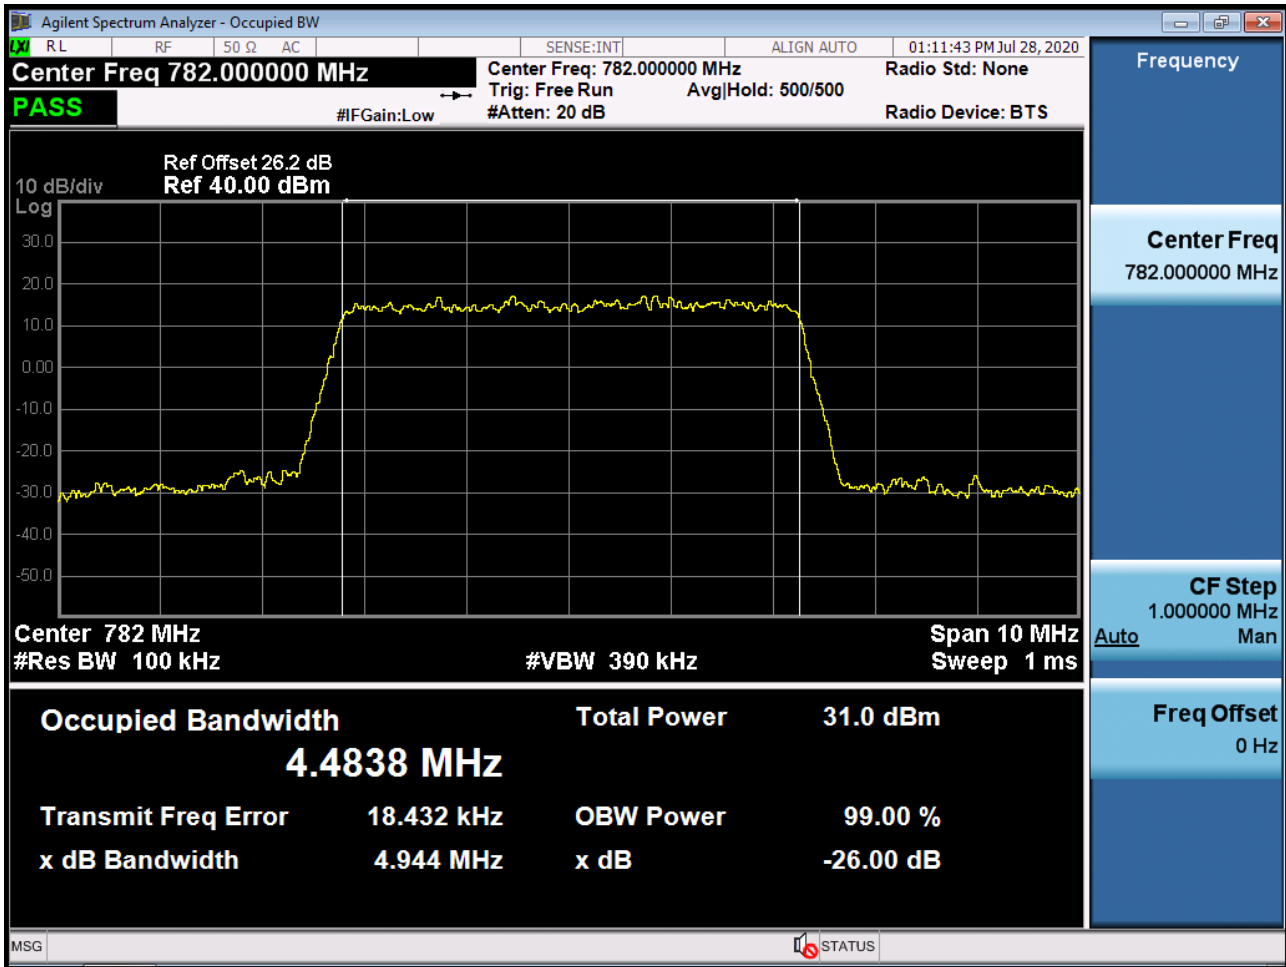


BAND 13. Occupied Bandwidth Plot (Ch.23230 64-QAM RB 25) 5 MHz

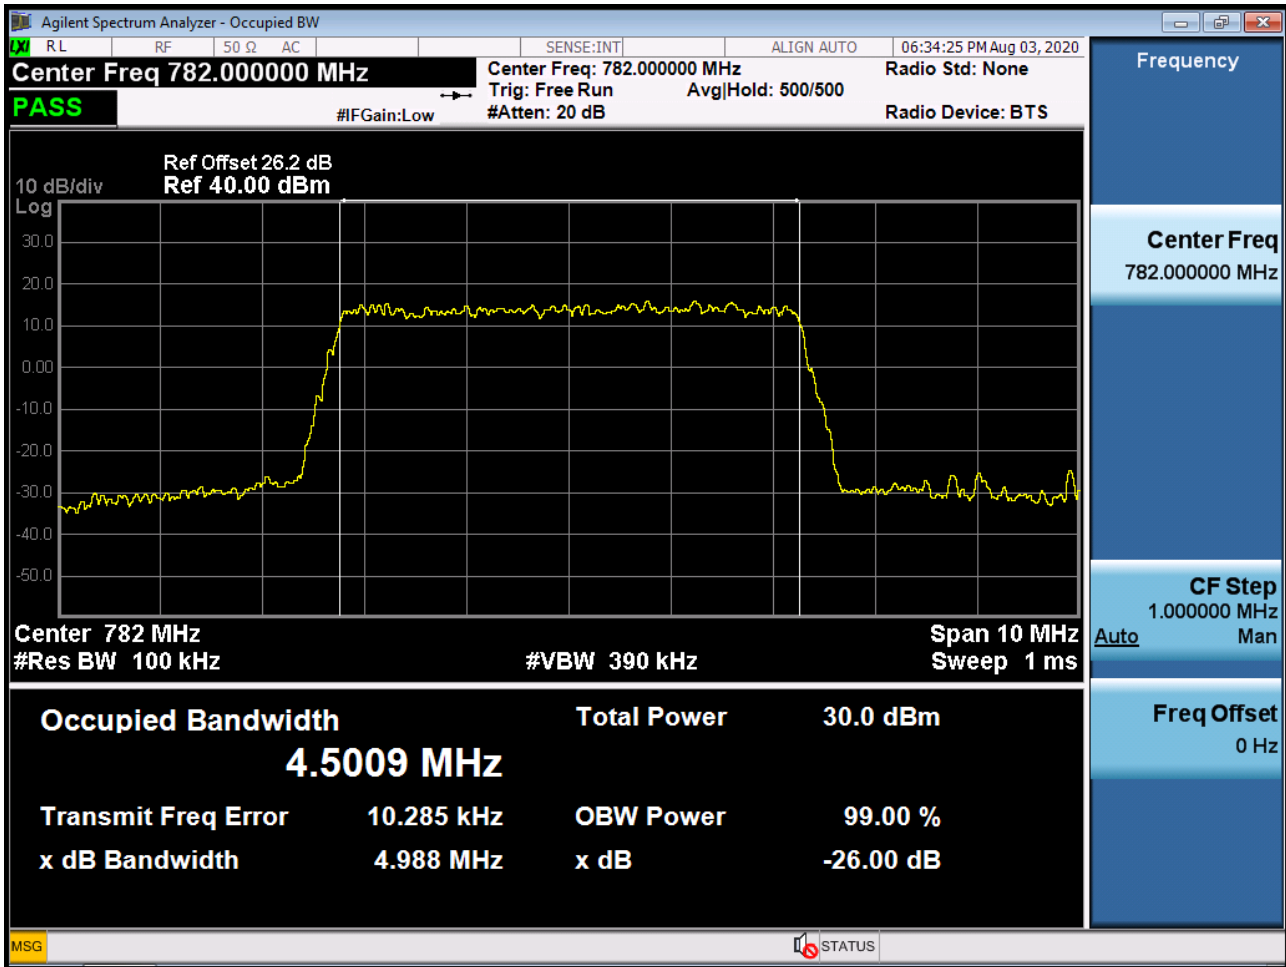


BAND 13. Occupied Bandwidth Plot (Ch.23230 QPSK RB 50) 10 MHz

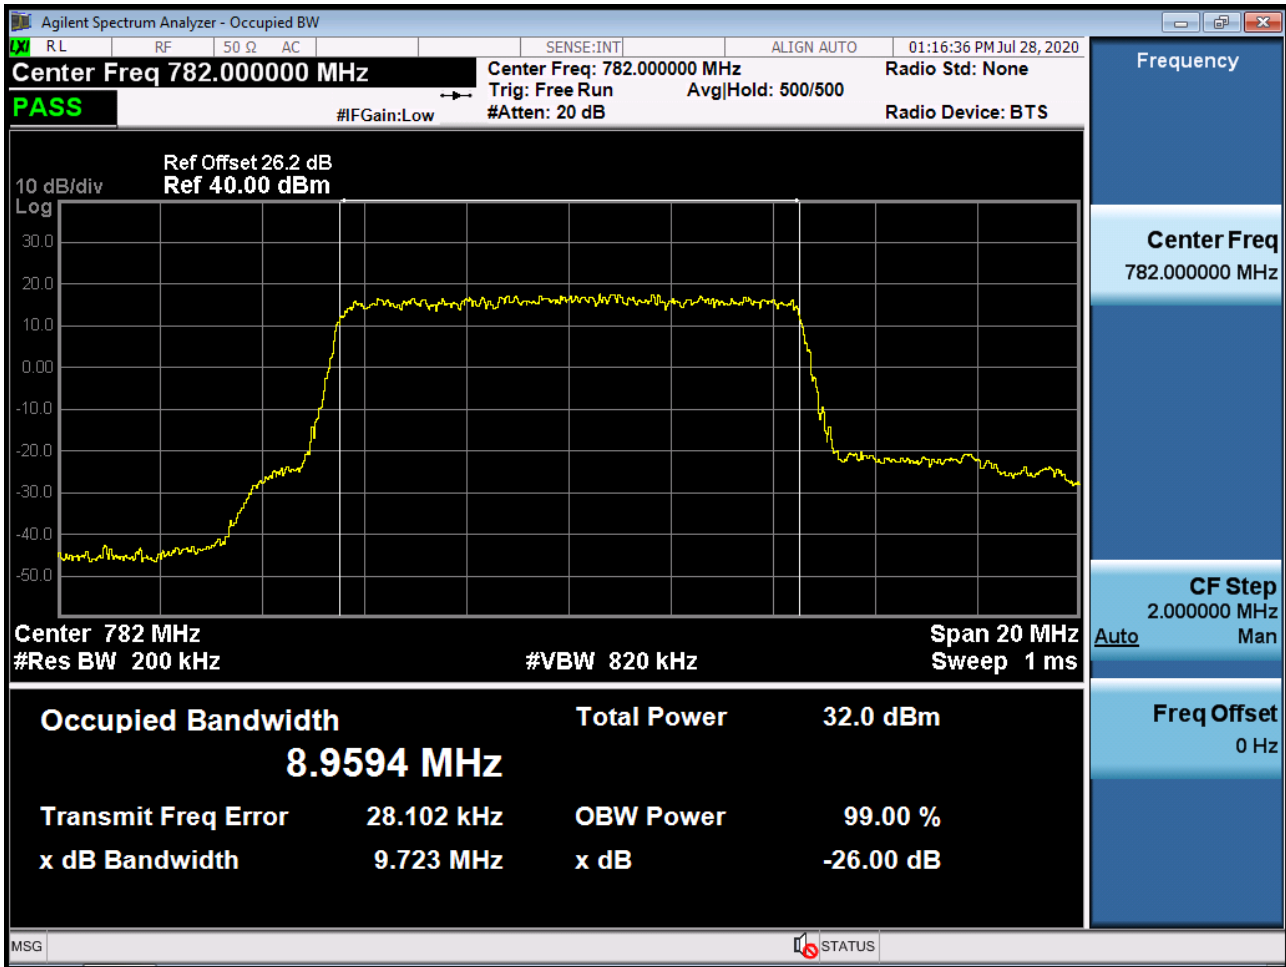

BAND 13. Occupied Bandwidth Plot (Ch.23230 16-QAM RB 50) 10 MHz

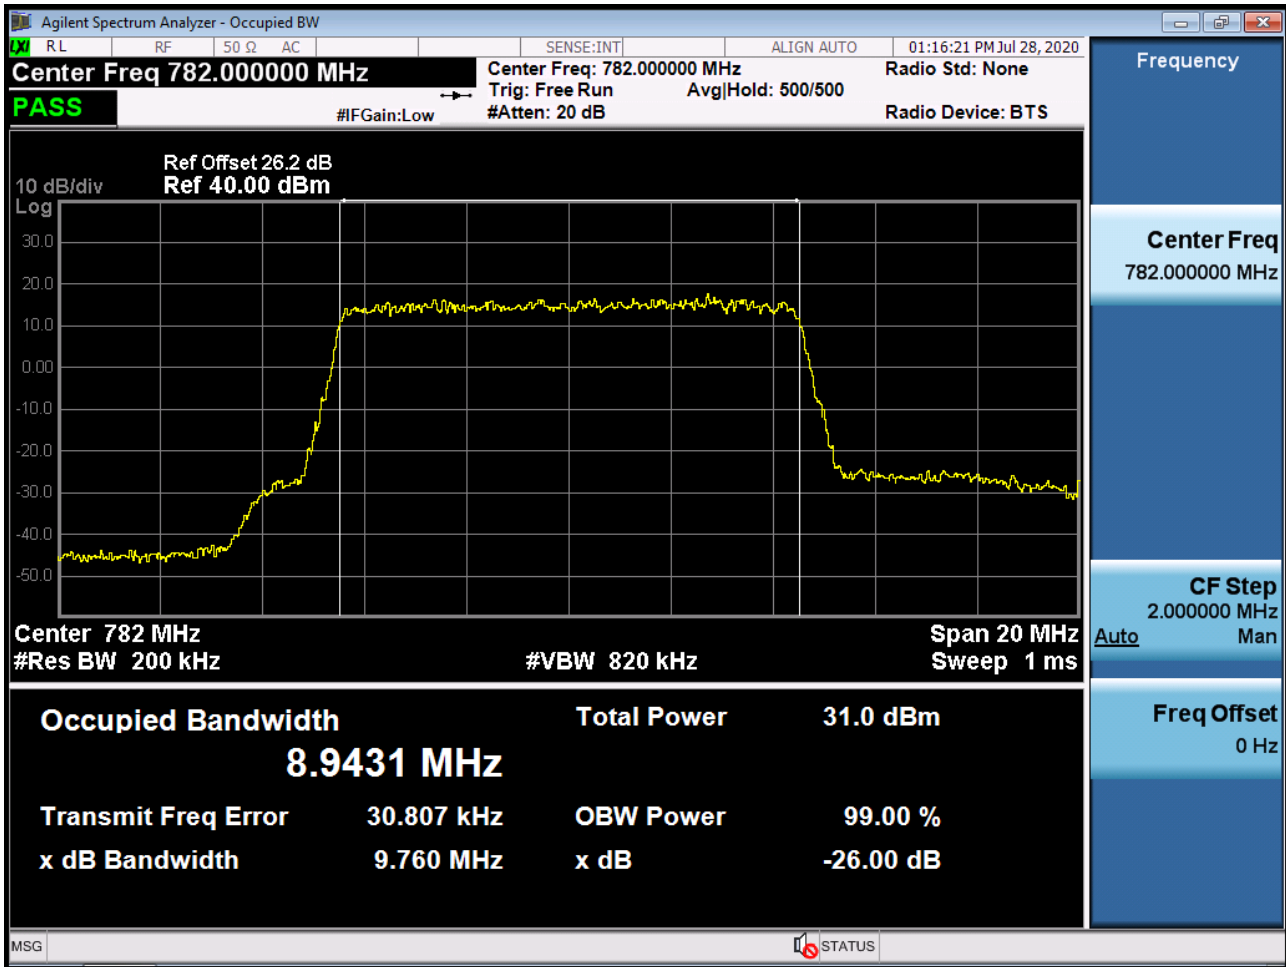

BAND 13. Occupied Bandwidth Plot (Ch.23230 64-QAM RB 50) 10 MHz

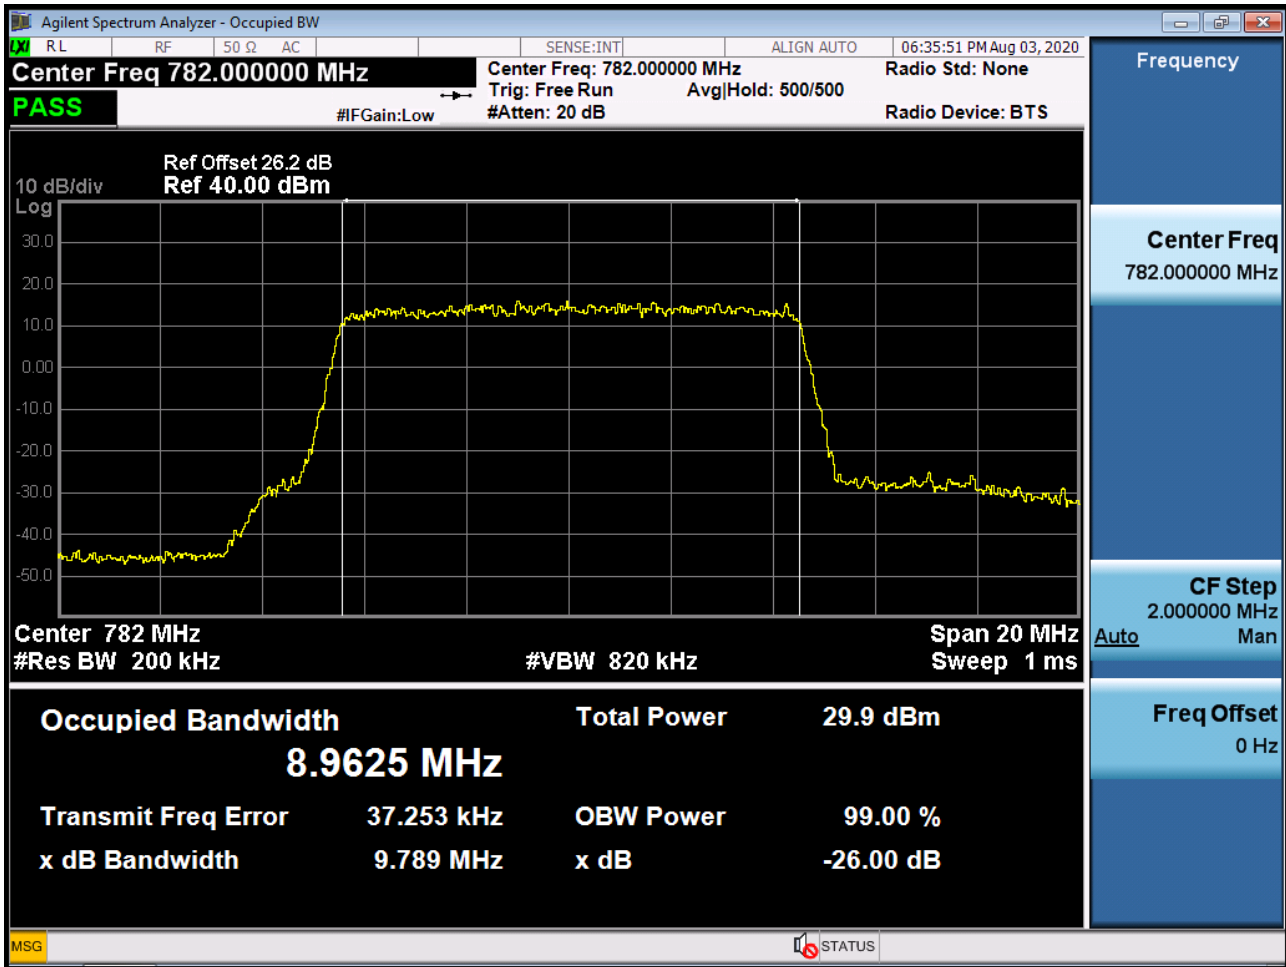


Band 13 Lower Band Edge Plot (5M BW Ch.23205 QPSK_RB1 OFFSET_0)




Band 13 Lower Band Edge Plot (5M BW Ch.23205 QPSK_RB_25)



Band 13 Lower Emission Mask (763 MHz ~ 775 MHz) Plot (5M BW Ch.23205 QPSK_RB25_0)

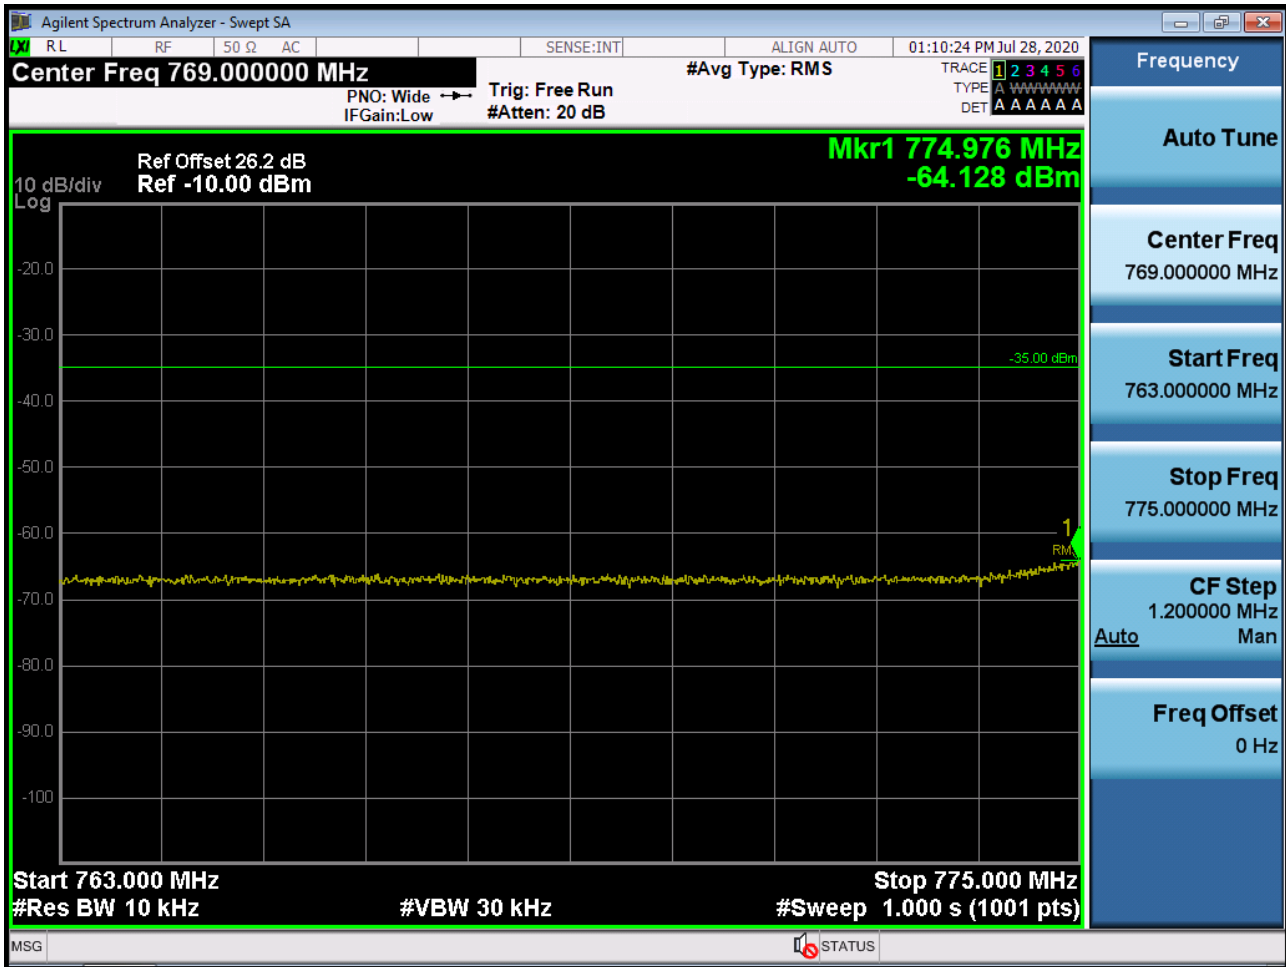


Band 13 Lower Band Edge Plot (10M BW Ch.23230 QPSK_RB1 OFFSET_0)

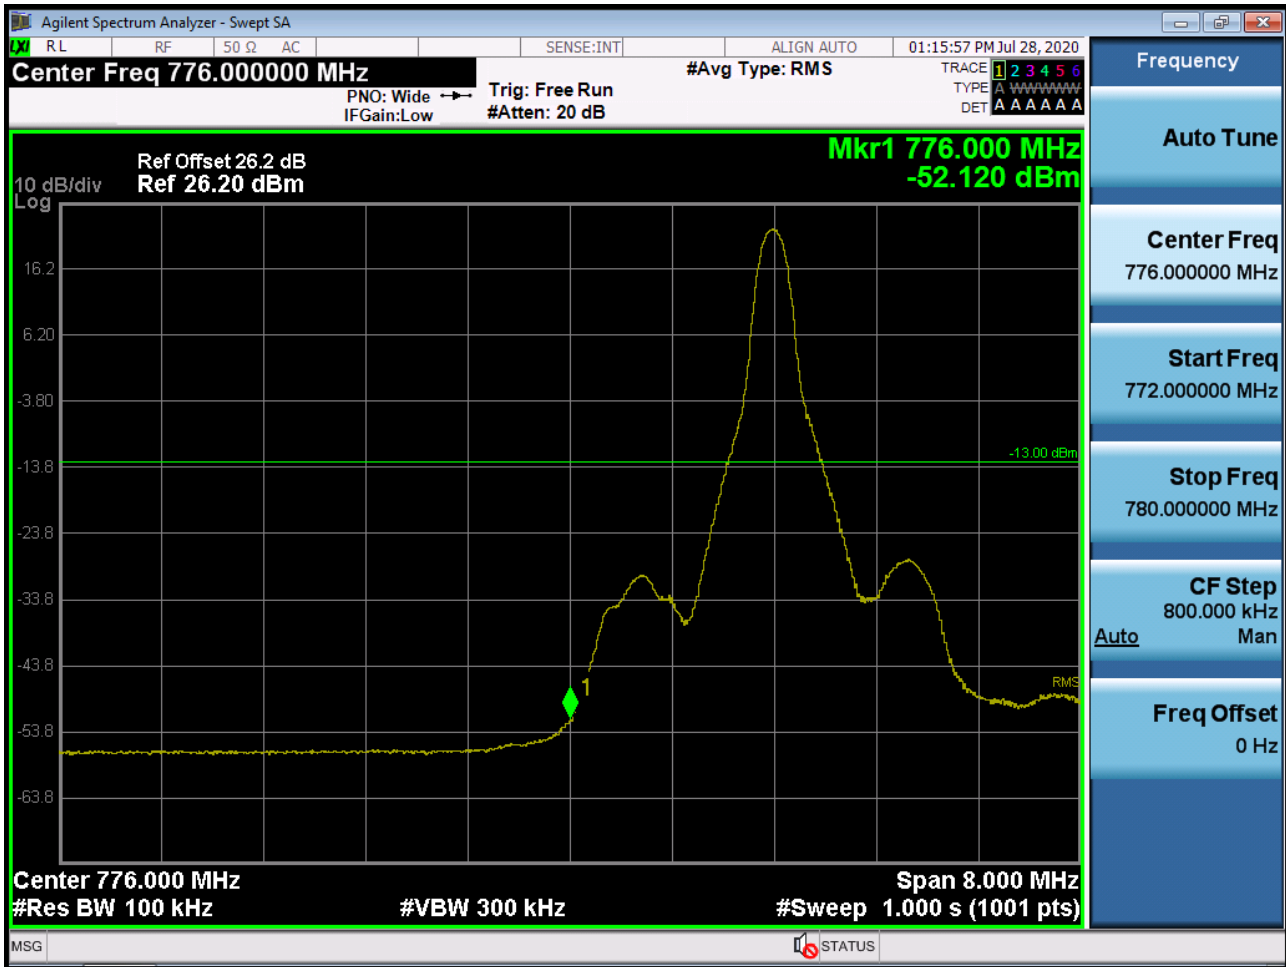

BAND 13. Lower Band Edge Plot (10M BW Ch.23230 QPSK RB_50)



Band 13 Lower Emission Mask (763 MHz ~ 775 MHz) Plot (10M BW Ch.23230 QPSK_RB50_0)

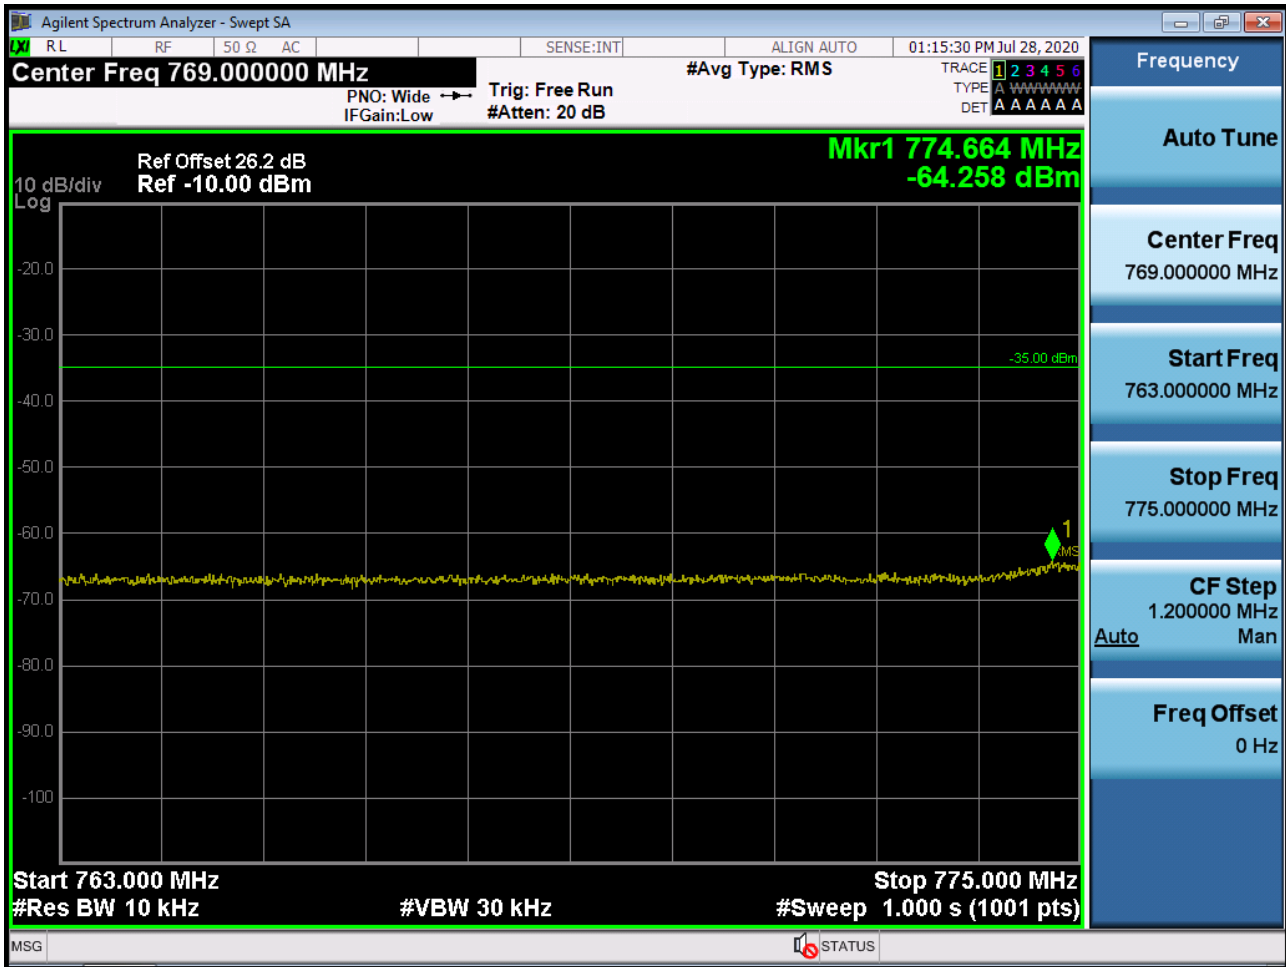


Band 13 Upper Band Edge Plot (5M BW Ch.23255 QPSK_RB1_Offset 24)



Band 13 Upper Band Edge Plot (5M BW Ch.23255 QPSK_RB_25)



Band 13 Upper Emission Mask (793 MHz ~805 MHz) Plot (5M BW Ch.23255 QPSK_RB25_0)

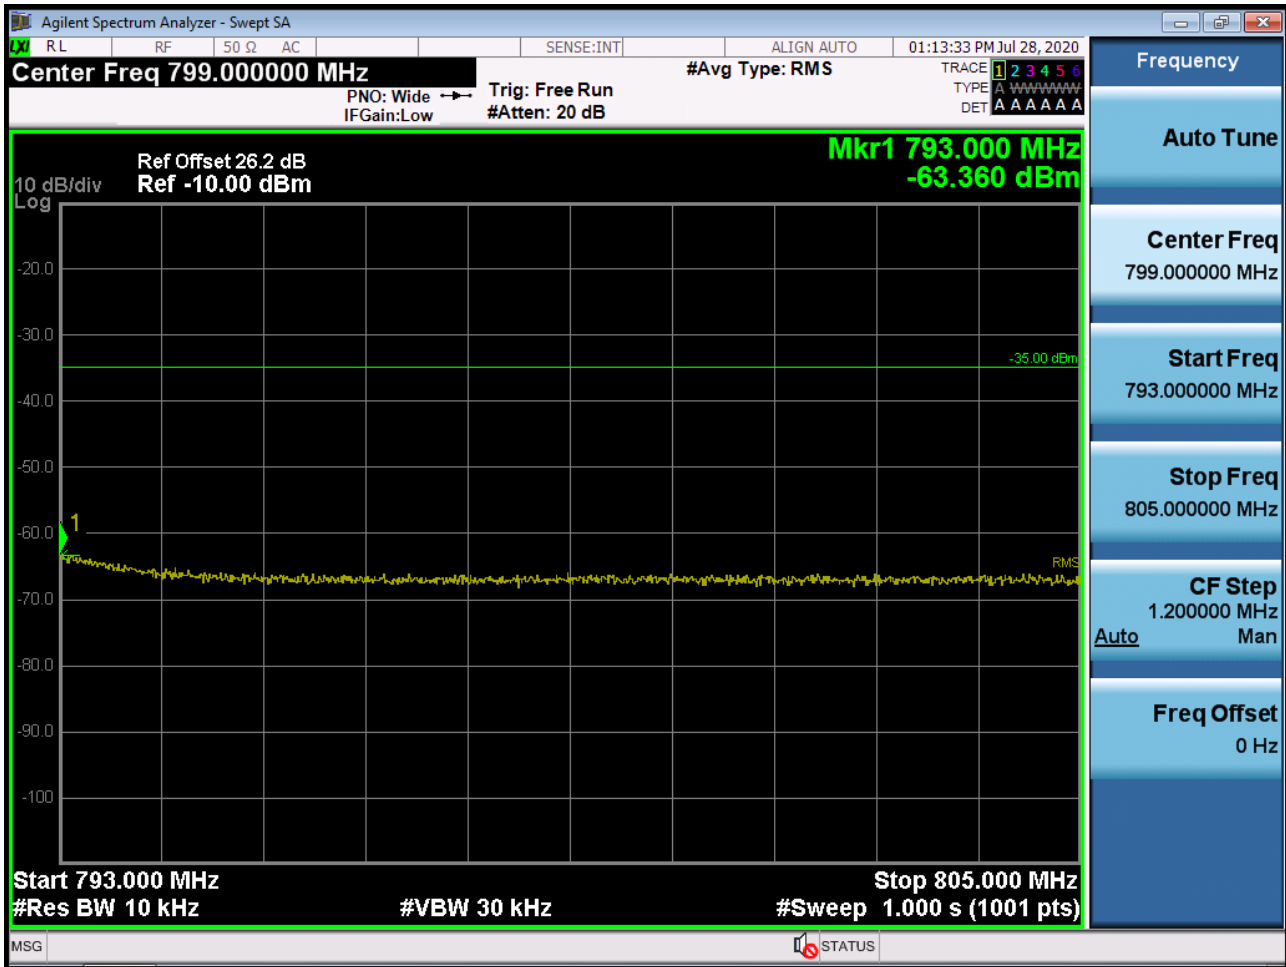


Band 13 Upper Band Edge Plot (10M BW Ch.23230 QPSK_RB1_Offset_49)




Band 13 Upper Band Edge Plot (10M BW Ch.23230 QPSK_QPSK_RB_50)




Band 13 Upper Emission Mask (793 MHz ~805 MHz) Plot (10M BW Ch.23230 QPSK_RB50_0)

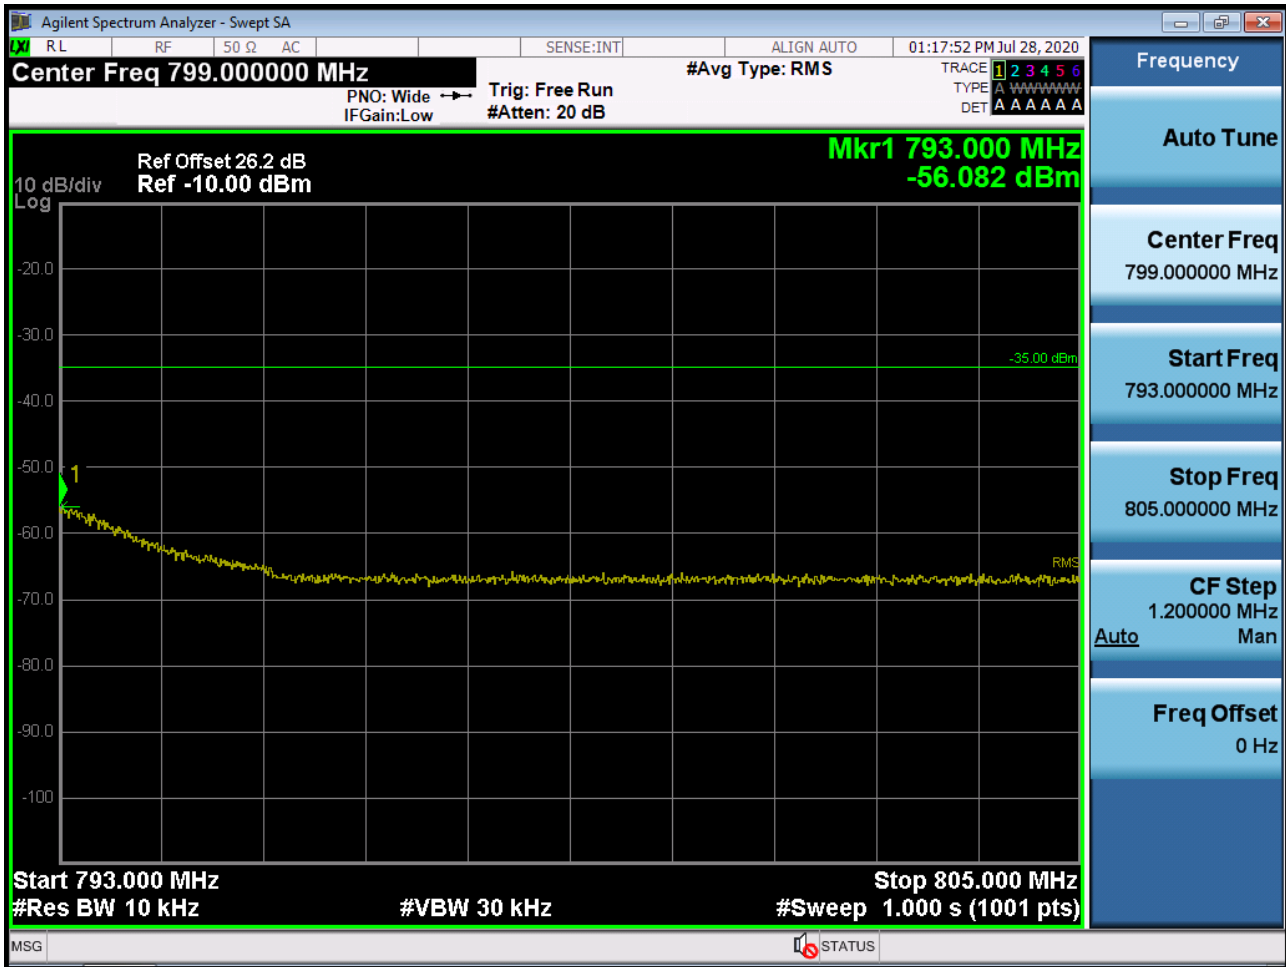


BAND 13. Conducted Spurious Plot (23205ch_5MHz_QPSK_RB 1_0)

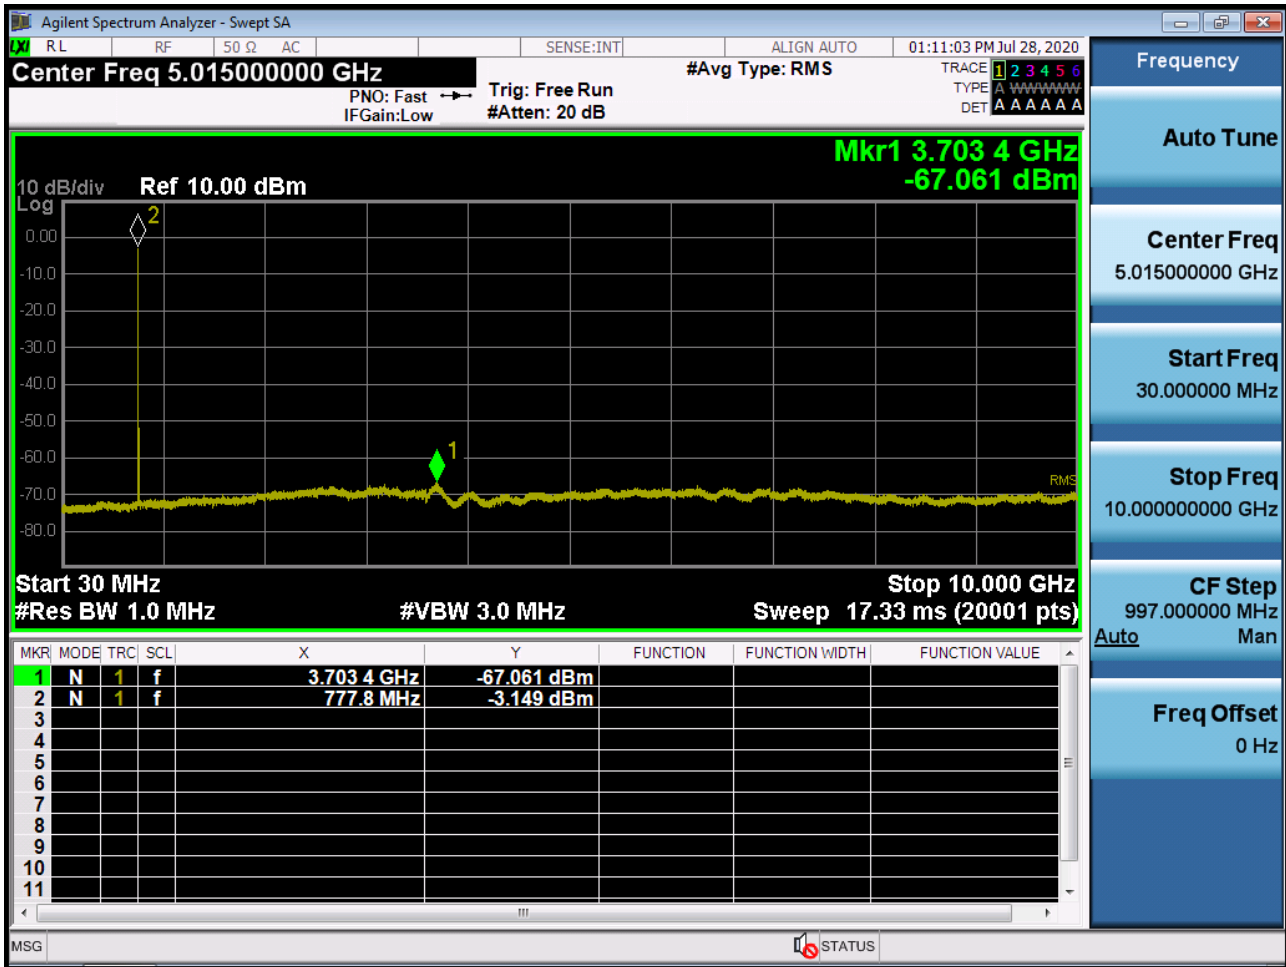


BAND 13. Conducted Spurious Plot (23230ch_5MHz_QPSK_RB 1_0)

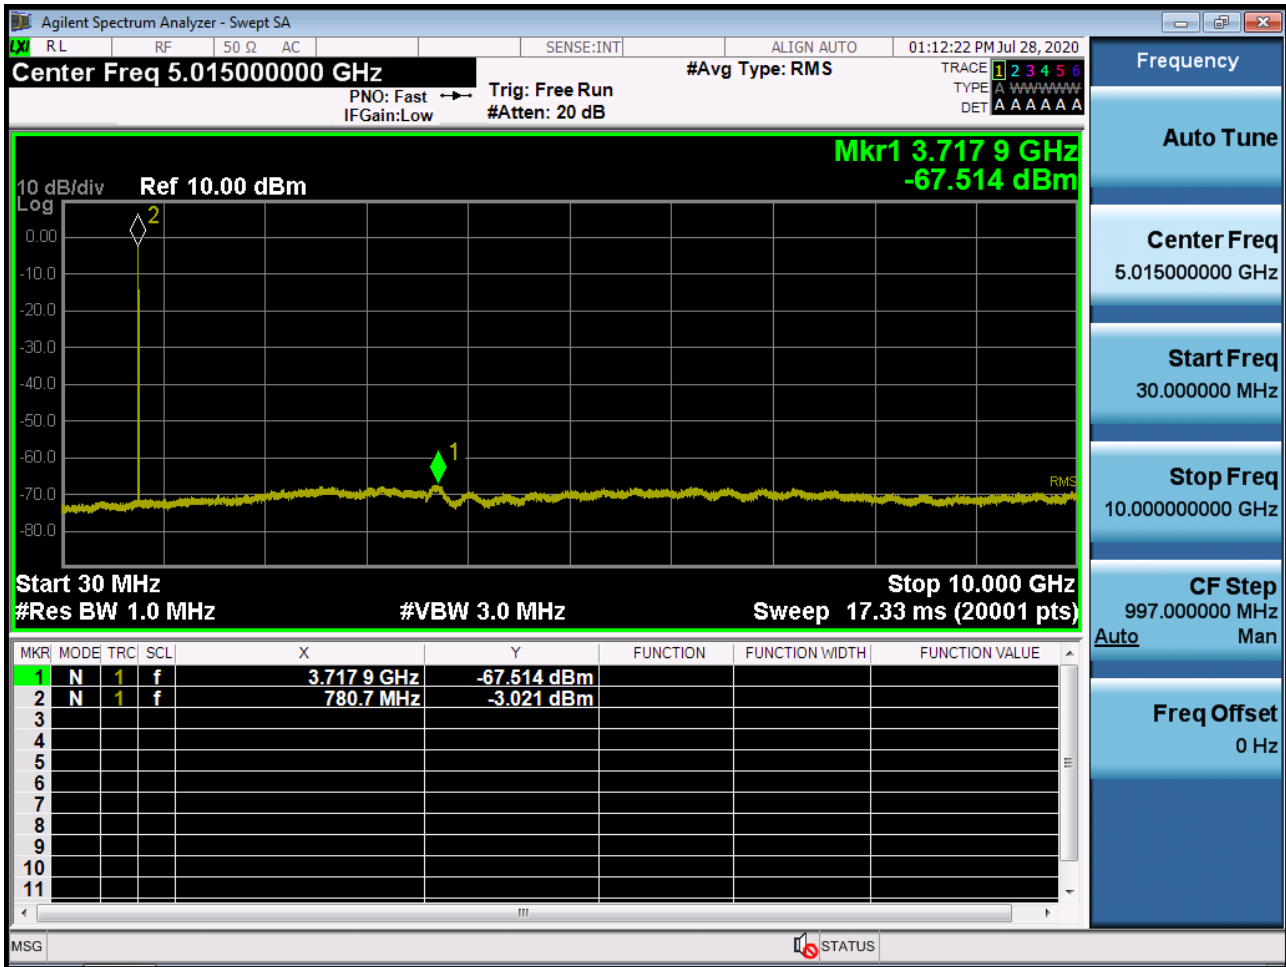

BAND 13. Conducted Spurious Plot (23255ch_5MHz_QPSK_RB 1_0)

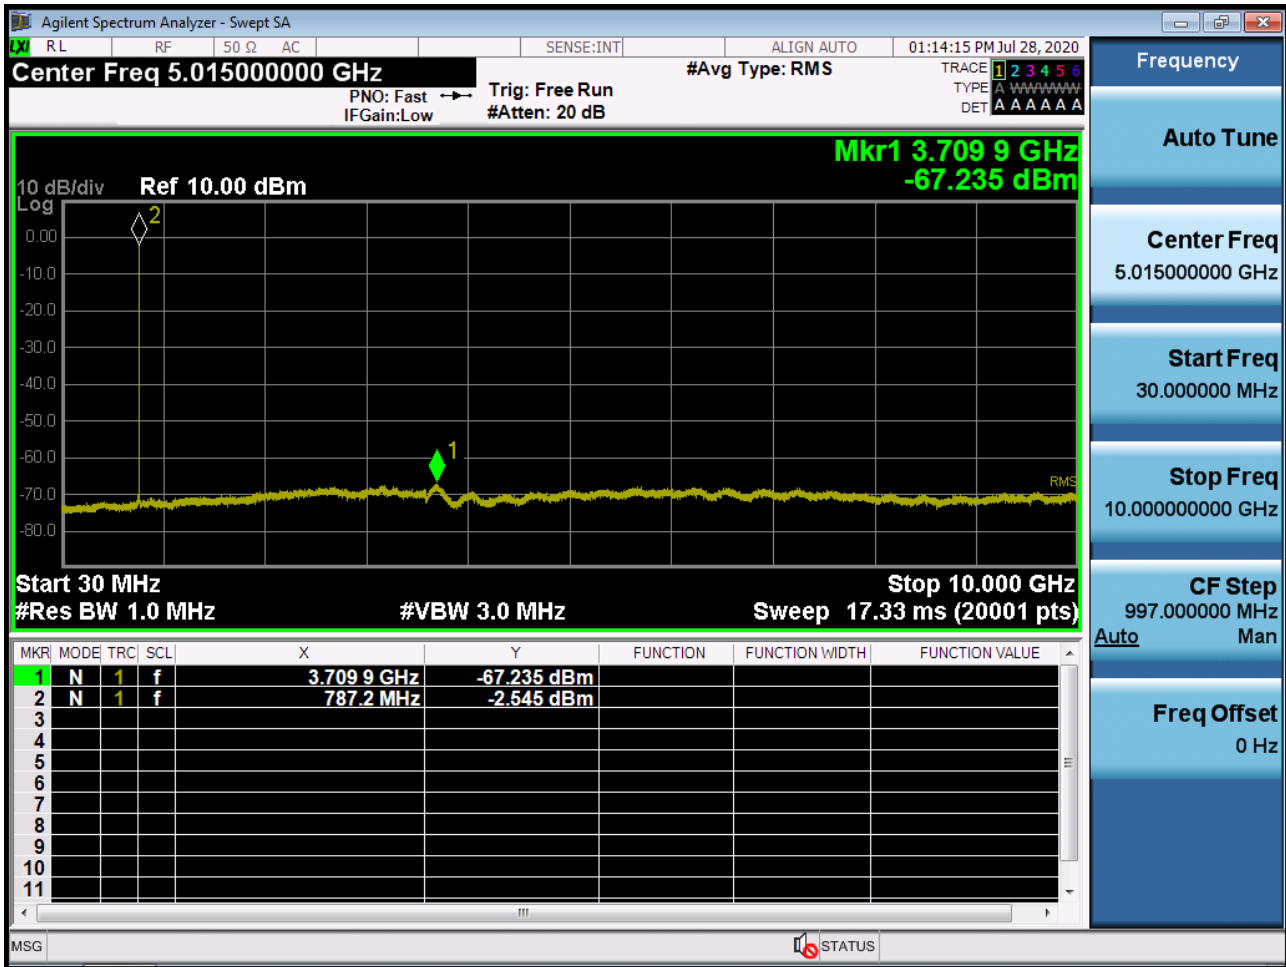

BAND 13. Conducted Spurious Plot (Ch.23230 10 MHz QPSK RB 1, Offset 0)

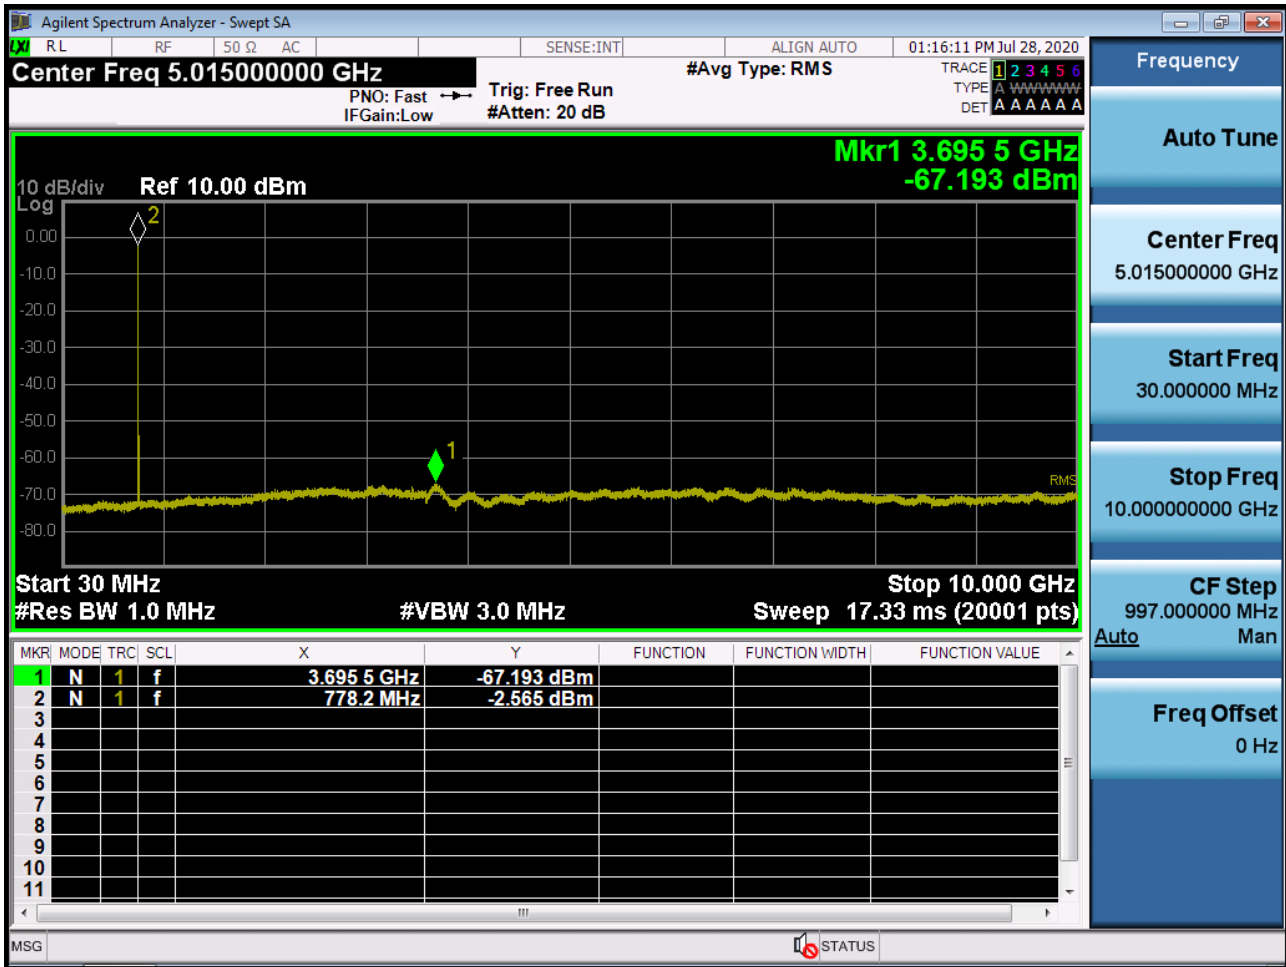

10. APPENDIX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2008-FC082-P