

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



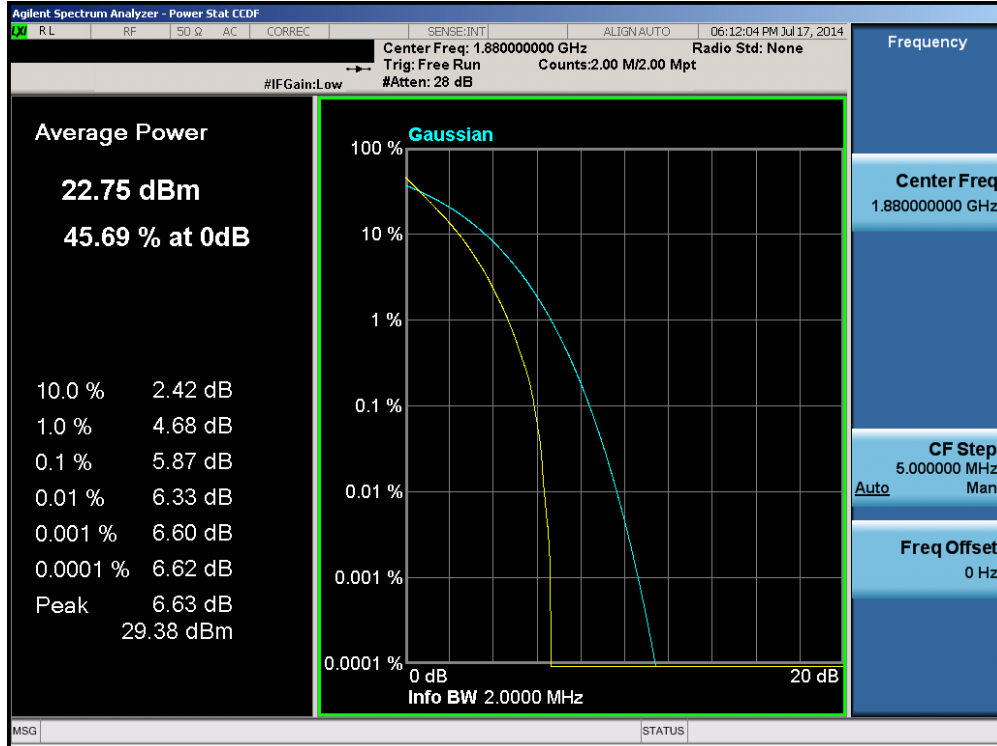


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 78 of 108	

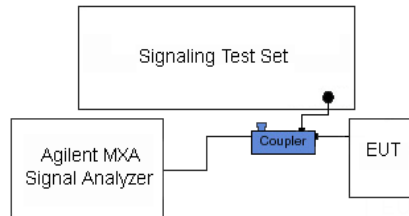


Plot 6-127. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

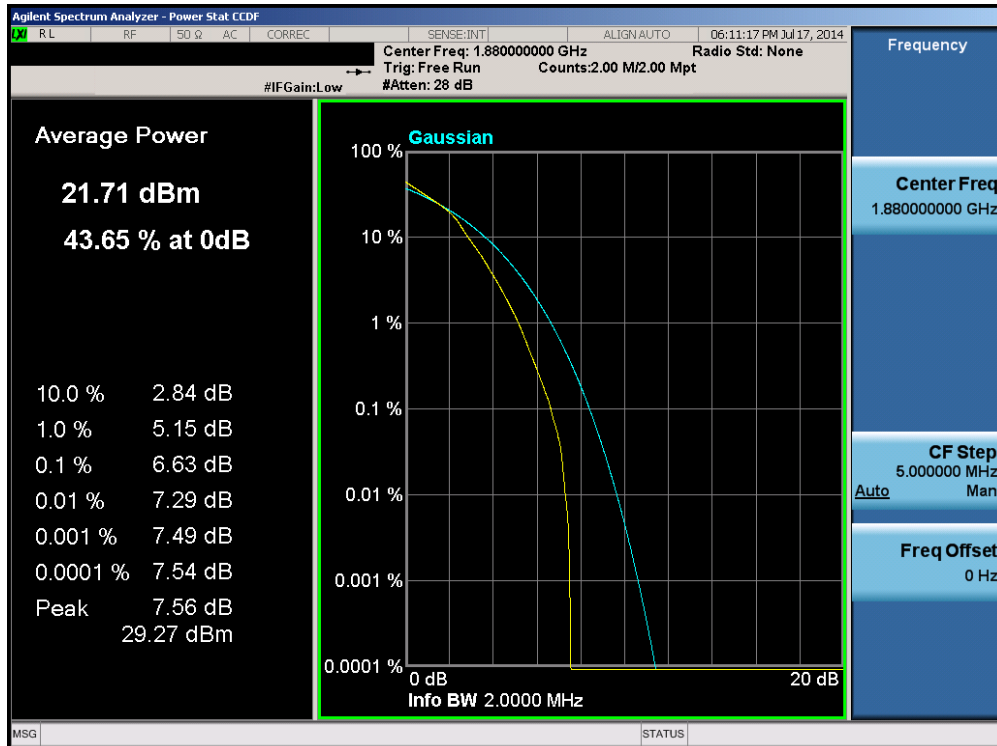


Plot 6-128. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 79 of 108

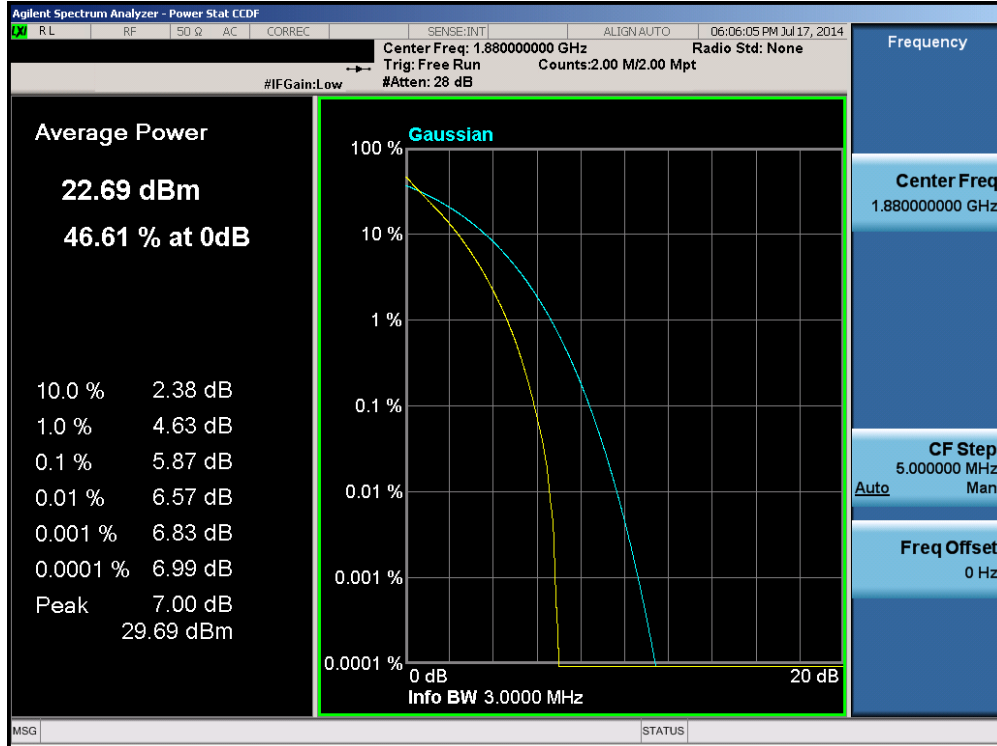


Plot 6-129. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

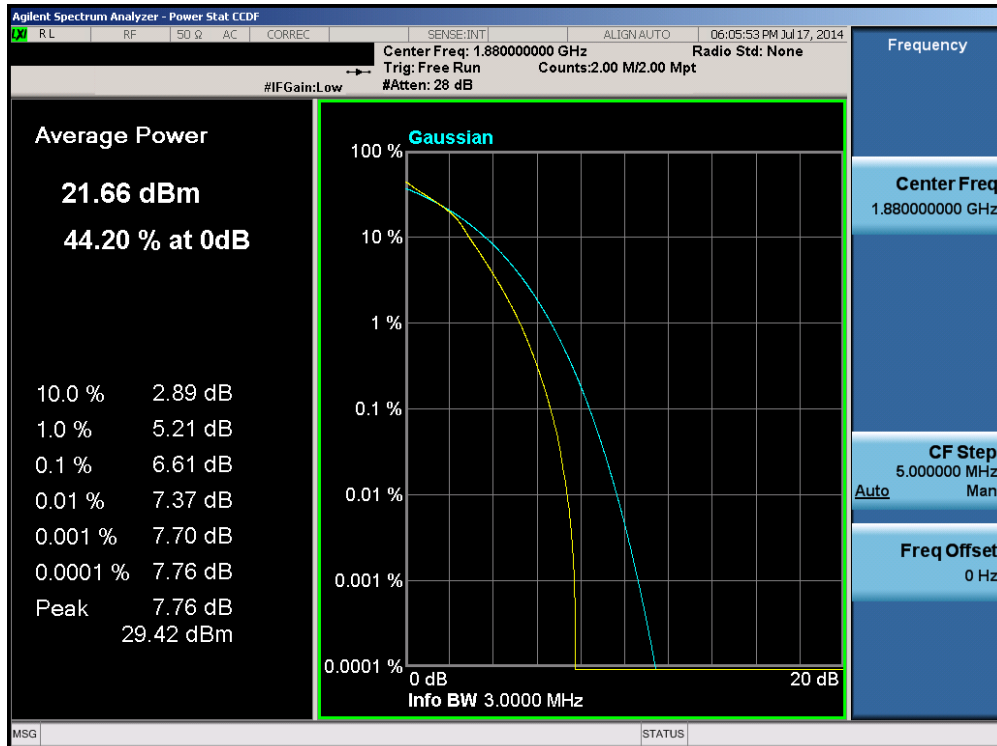


Plot 6-130. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 80 of 108

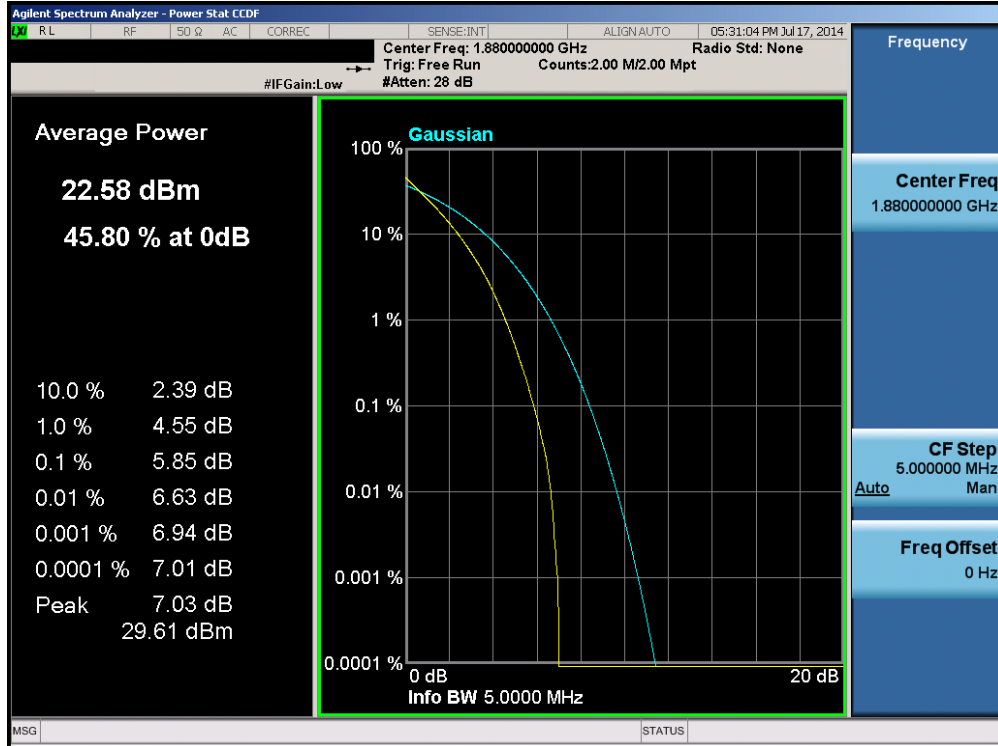


Plot 6-131. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

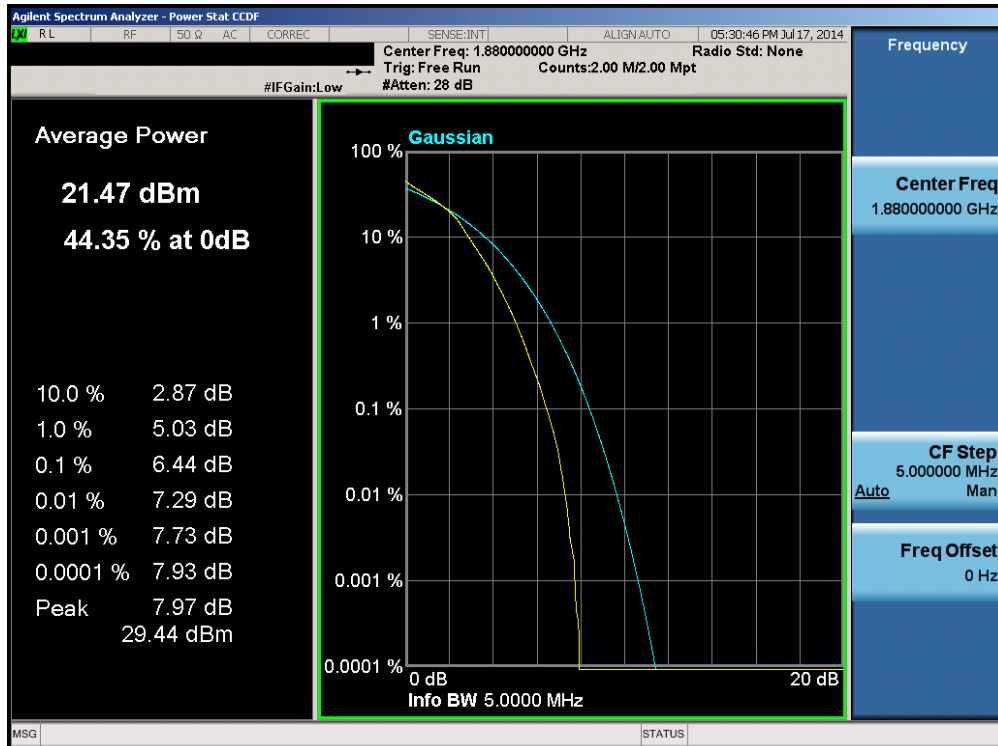


Plot 6-132. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 81 of 108

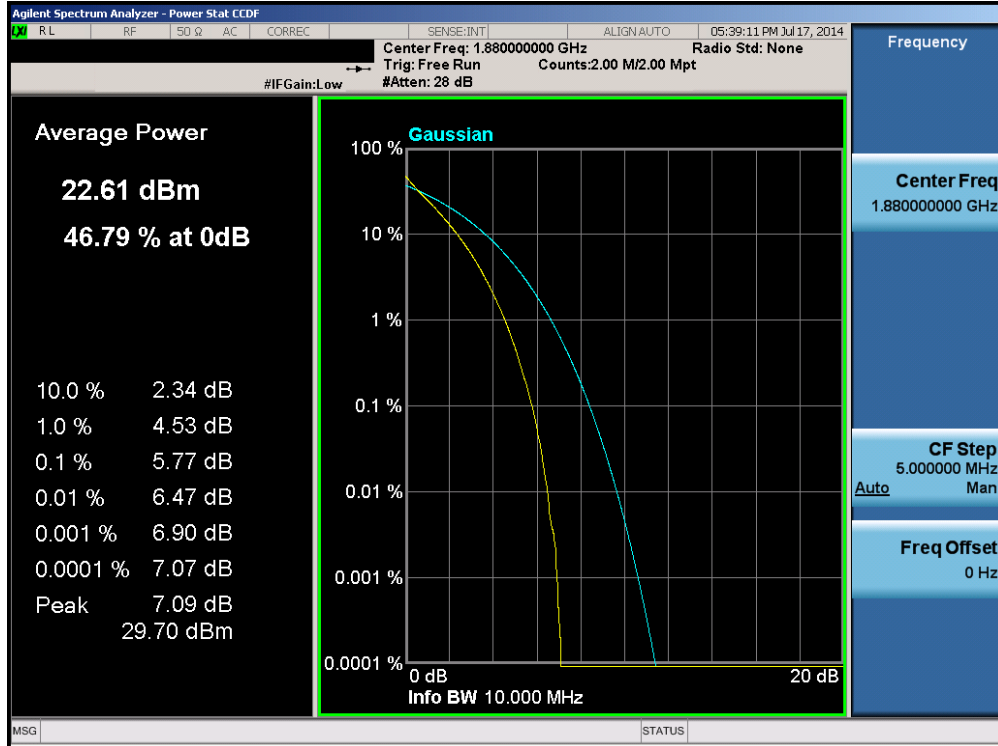


Plot 6-133. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

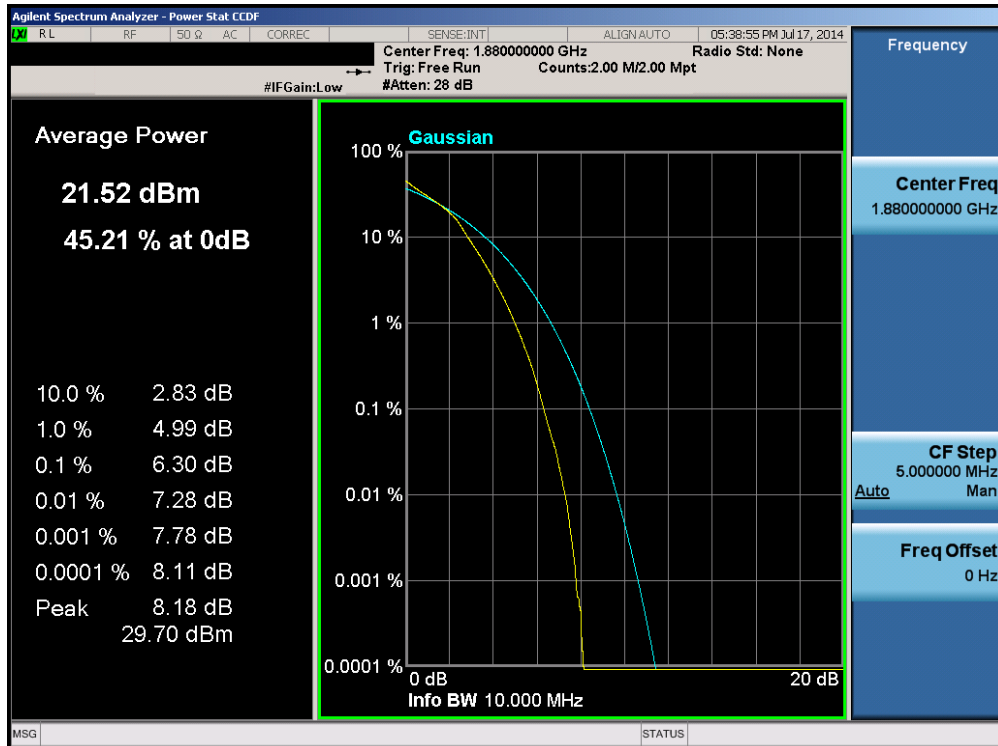


Plot 6-134. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 82 of 108

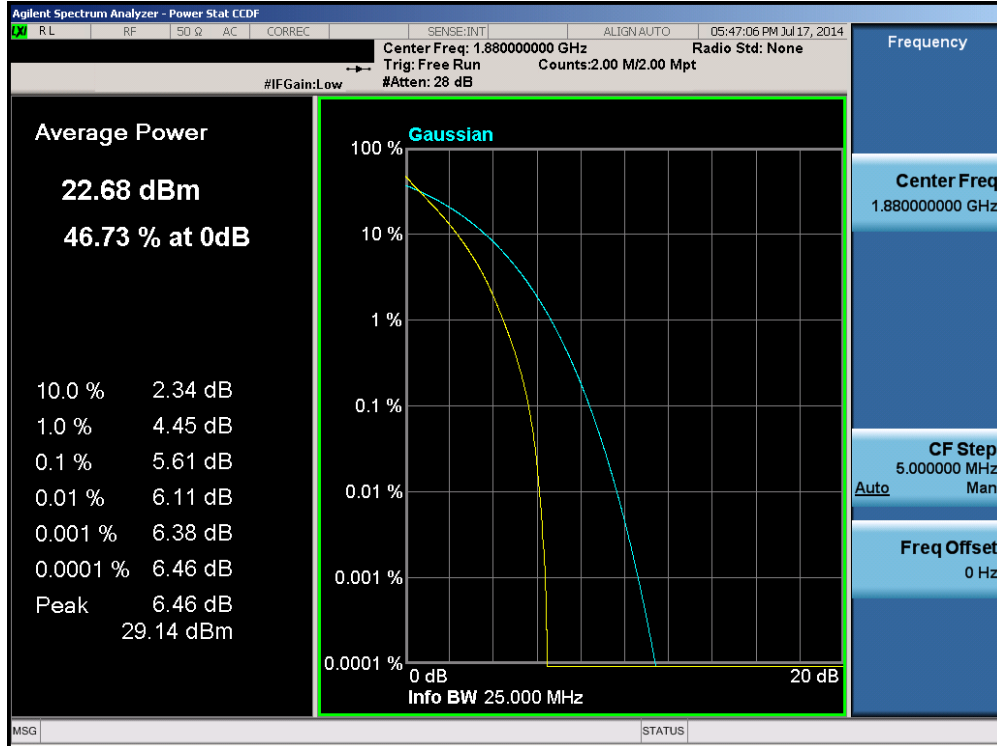


Plot 6-135. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

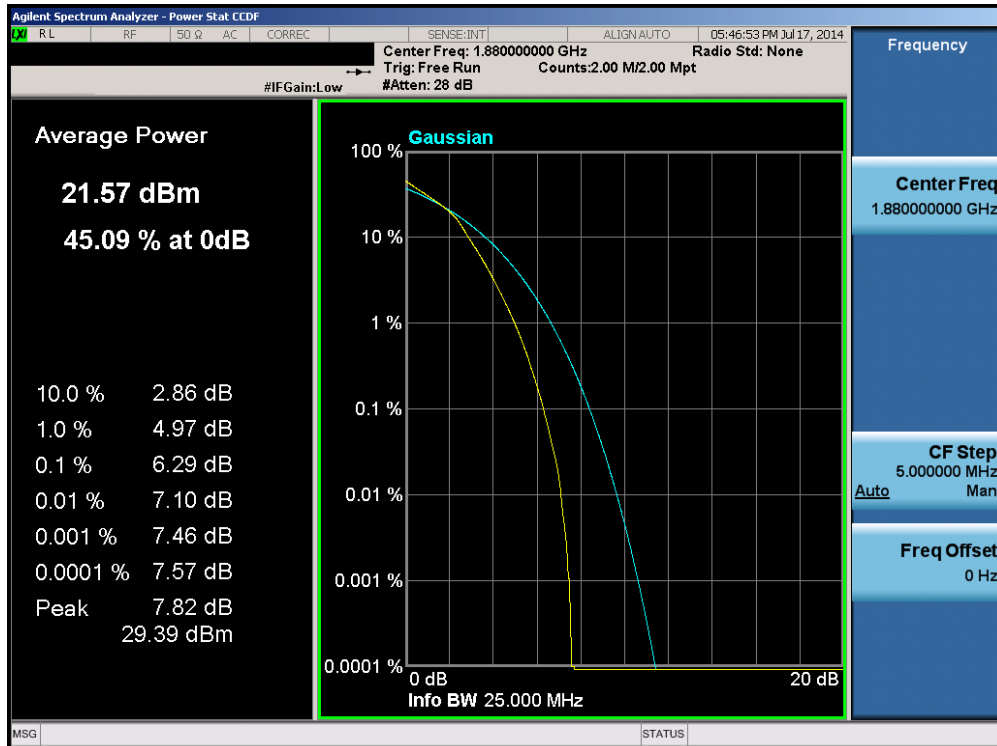


Plot 6-136. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 83 of 108

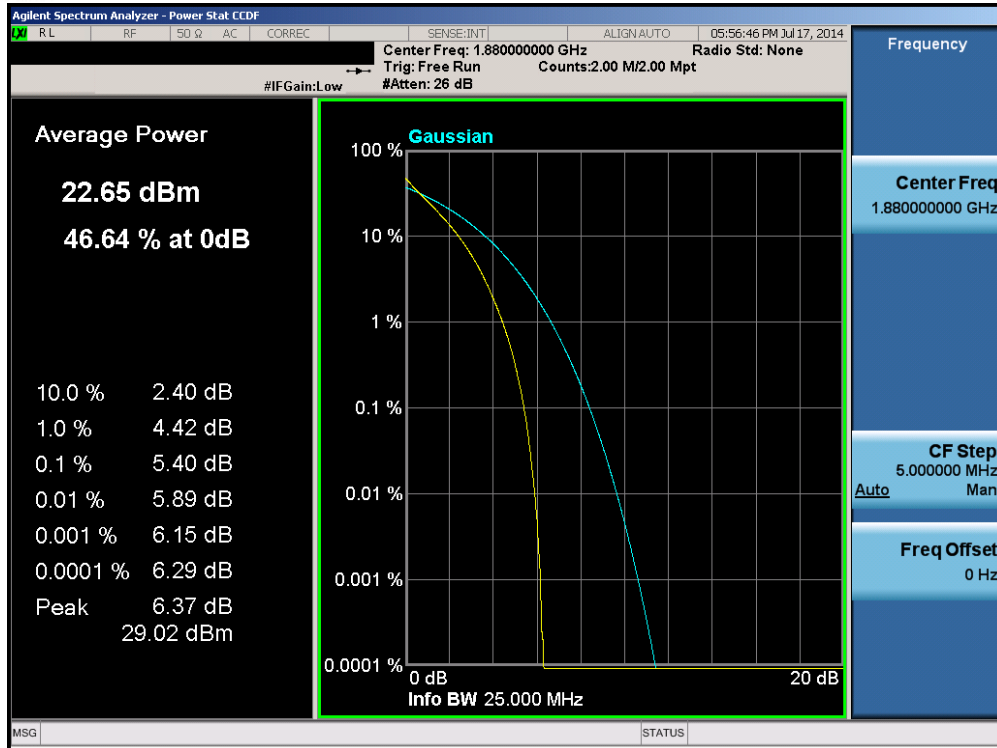

Plot 6-137. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

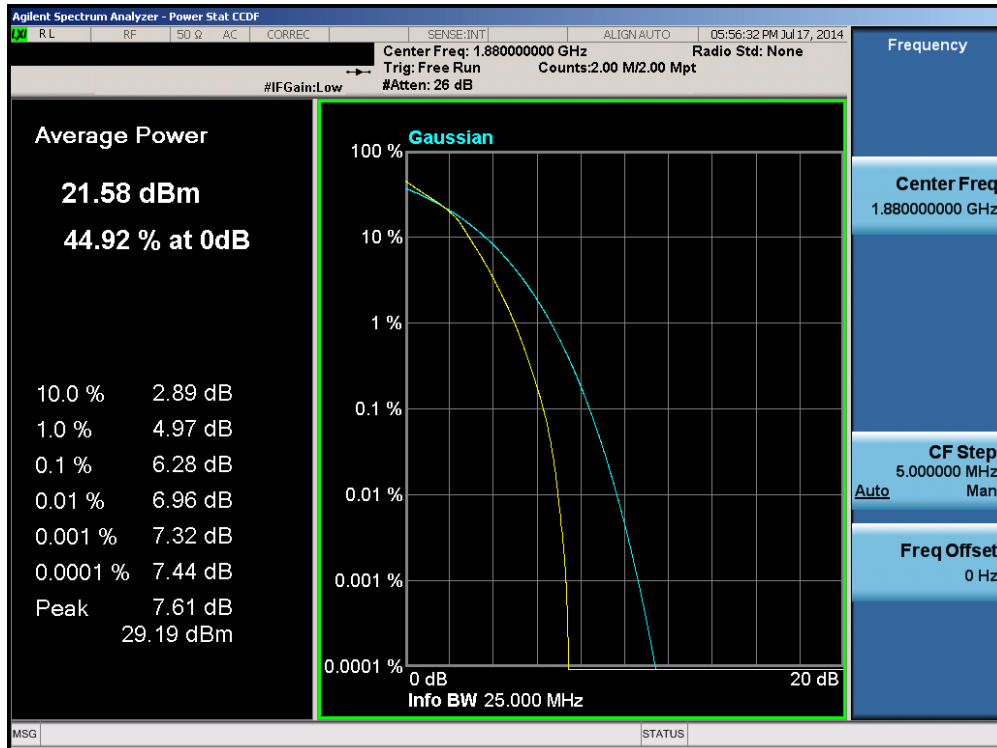

Plot 6-138. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 84 of 108

6.6 Radiated Power (ERP/EIRP) §22.913(a.2) §24.232(c) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 85 of 108	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

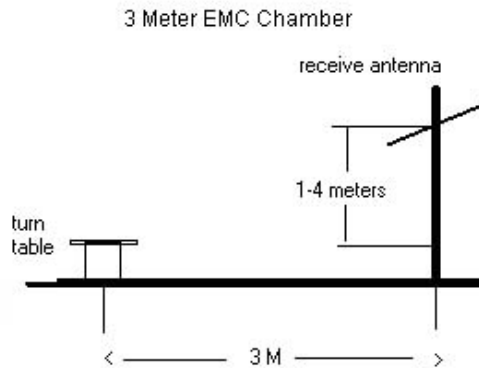




Figure 6-5. Test Instrument & Measurement Setup



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The EUT is supplied with a new/fully-recharged battery. The battery for this model EB-BG850BBE contains an embedded NFC antenna.

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 86 of 108	


Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1 / 24	12.79	3.62	V	V	16.41	0.044	-18.36
710.00	5	QPSK	Standard	1 / 24	12.82	3.65	V	V	16.47	0.044	-18.30
713.50	5	QPSK	Standard	1 / 24	13.51	3.67	V	V	17.18	0.052	-17.59
706.50	5	16-QAM	Standard	1 / 24	11.90	3.62	V	V	15.52	0.036	-19.25
710.00	5	16-QAM	Standard	1 / 24	12.07	3.65	V	V	15.72	0.037	-19.05
713.50	5	16-QAM	Standard	1 / 24	12.92	3.67	V	V	16.59	0.046	-18.18
709.00	10	QPSK	Standard	1 / 49	12.59	3.64	V	V	16.23	0.042	-18.54
710.00	10	QPSK	Standard	1 / 49	12.74	3.65	V	V	16.39	0.044	-18.38
711.00	10	QPSK	Standard	1 / 49	12.91	3.66	V	V	16.57	0.045	-18.21
709.00	10	16-QAM	Standard	1 / 49	11.89	3.64	V	V	15.53	0.036	-19.24
710.00	10	16-QAM	Standard	1 / 49	12.15	3.65	V	V	15.80	0.038	-18.97
711.00	10	16-QAM	Standard	1 / 49	12.31	3.66	V	V	15.97	0.039	-18.81

Table 6-2. ERP Data (Band 17)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 87 of 108	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 0	11.99	4.42	V	V	16.41	0.044	-22.04
836.50	1.4	QPSK	Standard	1 / 0	12.02	4.50	V	V	16.52	0.045	-21.93
848.30	1.4	QPSK	Standard	1 / 0	10.58	4.59	V	V	15.17	0.033	-23.28
824.70	1.4	16-QAM	Standard	1 / 0	11.14	4.42	V	V	15.56	0.036	-22.89
836.50	1.4	16-QAM	Standard	1 / 0	11.32	4.50	V	V	15.82	0.038	-22.63
848.30	1.4	16-QAM	Standard	1 / 0	9.79	4.59	V	V	14.38	0.027	-24.07
825.50	3	QPSK	Standard	1 / 0	11.89	4.42	V	V	16.31	0.043	-22.14
836.50	3	QPSK	Standard	1 / 0	11.98	4.50	V	V	16.48	0.044	-21.97
847.50	3	QPSK	Standard	1 / 0	10.43	4.58	V	V	15.01	0.032	-23.44
825.50	3	16-QAM	Standard	1 / 0	11.03	4.42	V	V	15.45	0.035	-23.00
836.50	3	16-QAM	Standard	1 / 0	11.25	4.50	V	V	15.75	0.038	-22.70
847.50	3	16-QAM	Standard	1 / 0	9.65	4.58	V	V	14.23	0.026	-24.22
826.50	5	QPSK	Standard	1 / 0	11.98	4.43	V	V	16.41	0.044	-22.04
836.50	5	QPSK	Standard	1 / 0	11.73	4.50	V	V	16.23	0.042	-22.22
846.50	5	QPSK	Standard	1 / 0	10.71	4.58	V	V	15.29	0.034	-23.17
826.50	5	16-QAM	Standard	1 / 0	11.17	4.43	V	V	15.60	0.036	-22.85
836.50	5	16-QAM	Standard	1 / 0	10.94	4.50	V	V	15.44	0.035	-23.01
846.50	5	16-QAM	Standard	1 / 0	9.90	4.58	V	V	14.48	0.028	-23.98
829.00	10	QPSK	Standard	1 / 49	12.08	4.45	V	V	16.53	0.045	-21.92
836.50	10	QPSK	Standard	1 / 0	12.01	4.50	V	V	16.51	0.045	-21.94
844.00	10	QPSK	Standard	1 / 0	11.18	4.56	V	V	15.74	0.037	-22.71
829.00	10	16-QAM	Standard	1 / 49	11.34	4.45	V	V	15.79	0.038	-22.66
836.50	10	16-QAM	Standard	1 / 0	11.22	4.50	V	V	15.72	0.037	-22.73
844.00	10	16-QAM	Standard	1 / 0	10.42	4.56	V	V	14.98	0.031	-23.47

Table 6-3. ERP Data (Band 5)

FCC ID: A3LSMG850M	 FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 88 of 108	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 0	11.07	9.67	V	H2	20.74	0.118	-9.26
1732.50	1.4	QPSK	Standard	1 / 0	10.88	9.65	V	H2	20.53	0.113	-9.47
1754.30	1.4	QPSK	Standard	1 / 5	12.12	9.62	V	H2	21.74	0.149	-8.26
1710.70	1.4	16-QAM	Standard	1 / 0	10.36	9.67	V	H2	20.03	0.101	-9.97
1732.50	1.4	16-QAM	Standard	1 / 0	10.17	9.65	V	H2	19.82	0.096	-10.18
1754.30	1.4	16-QAM	Standard	1 / 5	11.26	9.62	V	H2	20.88	0.123	-9.12
1711.50	3	QPSK	Standard	1 / 14	11.33	9.67	V	H2	21.00	0.126	-9.00
1732.50	3	QPSK	Standard	1 / 0	11.89	9.65	V	H2	21.54	0.142	-8.46
1753.50	3	QPSK	Standard	1 / 0	11.37	9.63	V	H2	21.00	0.126	-9.00
1711.50	3	16-QAM	Standard	1 / 14	10.50	9.67	V	H2	20.17	0.104	-9.83
1732.50	3	16-QAM	Standard	1 / 0	11.08	9.65	V	H2	20.73	0.118	-9.27
1753.50	3	16-QAM	Standard	1 / 0	10.45	9.63	V	H2	20.08	0.102	-9.92
1712.50	5	QPSK	Standard	1 / 0	11.48	9.66	V	H2	21.14	0.130	-8.86
1732.50	5	QPSK	Standard	1 / 24	12.61	9.65	V	H2	22.26	0.168	-7.74
1752.50	5	QPSK	Standard	1 / 24	11.95	9.63	V	H2	21.58	0.144	-8.42
1712.50	5	16-QAM	Standard	1 / 0	10.72	9.66	V	H2	20.38	0.109	-9.62
1732.50	5	16-QAM	Standard	1 / 24	11.75	9.65	V	H2	21.40	0.138	-8.60
1752.50	5	16-QAM	Standard	1 / 24	11.10	9.63	V	H2	20.73	0.118	-9.27
1715.00	10	QPSK	Standard	1 / 0	10.80	9.66	V	H2	20.46	0.111	-9.54
1732.50	10	QPSK	Standard	1 / 49	12.02	9.65	V	H2	21.67	0.147	-8.33
1750.00	10	QPSK	Standard	1 / 0	11.59	9.63	V	H2	21.22	0.132	-8.78
1715.00	10	16-QAM	Standard	1 / 0	10.10	9.66	V	H2	19.76	0.095	-10.24
1732.50	10	16-QAM	Standard	1 / 49	11.28	9.65	V	H2	20.93	0.124	-9.07
1750.00	10	16-QAM	Standard	1 / 0	10.78	9.63	V	H2	20.41	0.110	-9.59
1717.50	15	QPSK	Standard	1 / 74	11.36	9.66	V	H2	21.02	0.126	-8.98
1732.50	15	QPSK	Standard	1 / 74	12.51	9.65	V	H2	22.16	0.164	-7.84
1747.50	15	QPSK	Standard	1 / 0	12.07	9.63	V	H2	21.70	0.148	-8.30
1717.50	15	16-QAM	Standard	1 / 74	10.49	9.66	V	H2	20.15	0.103	-9.85
1732.50	15	16-QAM	Standard	1 / 74	11.15	9.65	V	H2	20.80	0.120	-9.20
1747.50	15	16-QAM	Standard	1 / 0	11.30	9.63	V	H2	20.93	0.124	-9.07
1720.00	20	QPSK	Standard	1 / 99	11.62	9.66	V	H2	21.28	0.134	-8.72
1732.50	20	QPSK	Standard	1 / 0	11.96	9.65	V	H2	21.61	0.145	-8.39
1745.00	20	QPSK	Standard	1 / 0	11.85	9.63	V	H2	21.48	0.141	-8.52
1720.00	20	16-QAM	Standard	1 / 99	10.82	9.66	V	H2	20.48	0.112	-9.52
1732.50	20	16-QAM	Standard	1 / 0	11.10	9.65	V	H2	20.75	0.119	-9.25
1745.00	20	16-QAM	Standard	1 / 0	11.14	9.63	V	H2	20.77	0.119	-9.23

Table 6-4. EIRP Data (Band 4)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 89 of 108	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	15.85	9.49	V	H2	25.34	0.342	-7.67
1880.00	1.4	QPSK	Standard	1 / 0	13.81	9.44	V	H2	23.25	0.211	-9.76
1909.30	1.4	QPSK	Standard	1 / 0	11.76	9.41	V	H2	21.17	0.131	-11.84
1850.70	1.4	16-QAM	Standard	1 / 0	14.99	9.49	V	H2	24.48	0.281	-8.53
1880.00	1.4	16-QAM	Standard	1 / 0	12.99	9.44	V	H2	22.43	0.175	-10.58
1909.30	1.4	16-QAM	Standard	1 / 0	10.90	9.41	V	H2	20.31	0.107	-12.70
1851.50	3	QPSK	Standard	1 / 0	14.83	9.49	V	H2	24.32	0.271	-8.69
1880.00	3	QPSK	Standard	1 / 0	13.77	9.44	V	H2	23.21	0.210	-9.80
1908.50	3	QPSK	Standard	1 / 0	12.65	9.41	V	H2	22.06	0.161	-10.95
1851.50	3	16-QAM	Standard	1 / 0	13.99	9.49	V	H2	23.48	0.223	-9.53
1880.00	3	16-QAM	Standard	1 / 0	12.89	9.44	V	H2	22.33	0.171	-10.68
1908.50	3	16-QAM	Standard	1 / 0	11.68	9.41	V	H2	21.09	0.128	-11.92
1852.50	5	QPSK	Standard	1 / 0	15.67	9.49	V	H2	25.16	0.328	-7.85
1880.00	5	QPSK	Standard	1 / 0	13.61	9.44	V	H2	23.05	0.202	-9.96
1907.50	5	QPSK	Standard	1 / 0	13.22	9.41	V	H2	22.63	0.183	-10.38
1852.50	5	16-QAM	Standard	1 / 0	14.87	9.49	V	H2	24.36	0.273	-8.65
1880.00	5	16-QAM	Standard	1 / 0	12.67	9.44	V	H2	22.11	0.163	-10.90
1907.50	5	16-QAM	Standard	1 / 0	12.34	9.41	V	H2	21.75	0.149	-11.26
1855.00	10	QPSK	Standard	1 / 0	15.32	9.49	V	H2	24.81	0.302	-8.20
1880.00	10	QPSK	Standard	1 / 0	13.81	9.44	V	H2	23.25	0.211	-9.76
1905.00	10	QPSK	Standard	1 / 0	12.55	9.41	V	H2	21.96	0.157	-11.05
1855.00	10	16-QAM	Standard	1 / 0	14.54	9.49	V	H2	24.03	0.253	-8.98
1880.00	10	16-QAM	Standard	1 / 0	12.97	9.44	V	H2	22.41	0.174	-10.60
1905.00	10	16-QAM	Standard	1 / 0	11.84	9.41	V	H2	21.25	0.133	-11.76
1857.50	15	QPSK	Standard	1 / 0	15.21	9.48	V	H2	24.69	0.295	-8.32
1880.00	15	QPSK	Standard	1 / 0	15.05	9.44	V	H2	24.49	0.281	-8.52
1902.50	15	QPSK	Standard	1 / 0	12.48	9.41	V	H2	21.89	0.154	-11.12
1857.50	15	16-QAM	Standard	1 / 0	14.53	9.48	V	H2	24.01	0.252	-9.00
1880.00	15	16-QAM	Standard	1 / 0	13.34	9.44	V	H2	22.78	0.190	-10.23
1902.50	15	16-QAM	Standard	1 / 0	11.64	9.41	V	H2	21.05	0.127	-11.96
1860.00	20	QPSK	Standard	1 / 0	15.18	9.48	V	H2	24.66	0.292	-8.35
1880.00	20	QPSK	Standard	1 / 0	13.85	9.44	V	H2	23.29	0.213	-9.72
1900.00	20	QPSK	Standard	1 / 0	12.78	9.41	V	H2	22.19	0.166	-10.82
1860.00	20	16-QAM	Standard	1 / 0	14.26	9.48	V	H2	23.74	0.236	-9.27
1880.00	20	16-QAM	Standard	1 / 0	13.04	9.44	V	H2	22.48	0.177	-10.53
1900.00	20	16-QAM	Standard	1 / 0	11.85	9.41	V	H2	21.26	0.134	-11.75

Table 6-5. EIRP Data (Band 2)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 90 of 108	

6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r01 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

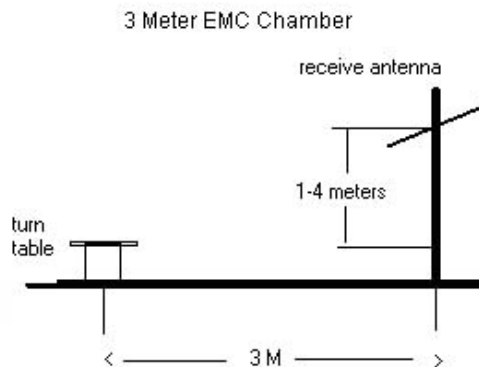




Figure 6-6. Test Instrument & Measurement Setup

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 91 of 108



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The EUT is supplied with a new/fully-recharged battery. The battery for this model EB-BG850BBE contains an embedded NFC antenna.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 706.50 MHz
 CHANNEL: 23755
 MEASURED OUTPUT POWER: 16.41 dBm = 0.044 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.41 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1413.00	-64.44	5.72	-58.72	H	H	75.1
2119.50	-60.37	6.71	-53.66	H	H	70.1
2826.00	-62.36	7.81	-54.55	H	H	71.0

Table 6-6. Radiated Spurious Data (Band 17 – Low Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 92 of 108	

OPERATING FREQUENCY: 710.00 MHz
 CHANNEL: 23790
 MEASURED OUTPUT POWER: 16.47 dBm = 0.044 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.47 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1420.00	-60.58	5.76	-54.82	H	H	71.3
2130.00	-59.81	6.77	-53.04	H	H	69.5
2840.00	-61.35	7.78	-53.56	H	H	70.0

Table 6-7. Radiated Spurious Data (Band 17 – Mid Channel)

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23825
 MEASURED OUTPUT POWER: 17.18 dBm = 0.052 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 30.18 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1427.00	-56.59	5.80	-50.79	H	H	68.0
2140.50	-57.01	6.83	-50.18	H	H	67.4
2854.00	-61.19	7.76	-53.42	H	H	70.6

Table 6-8. Radiated Spurious Data (Band 17 – High Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 93 of 108

OPERATING FREQUENCY: 829.00 MHz
 CHANNEL: 20450
 MEASURED OUTPUT POWER: 16.53 dBm = 0.045 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.53 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1658.00	-62.89	6.56	-56.33	H	H	72.9
2487.00	-44.91	7.32	-37.59	H	H	54.1
3316.00	-58.04	7.39	-50.65	H	H	67.2

Table 6-9. Radiated Spurious Data (Band 5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 16.51 dBm = 0.045 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.51 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1673.00	-61.54	6.55	-54.99	H	H	71.5
2509.50	-47.81	7.34	-40.47	H	H	57.0
3346.00	-59.11	7.44	-51.67	H	H	68.2

Table 6-10. Radiated Spurious Data (Band 5 – Mid Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 94 of 108	

OPERATING FREQUENCY: 844.00 MHz
 CHANNEL: 20600
 MEASURED OUTPUT POWER: 15.74 dBm = 0.037 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 28.74 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1688.00	-62.04	6.55	-55.49	H	H	71.2
2532.00	-51.36	7.35	-44.00	H	H	59.7
3376.00	-59.87	7.48	-52.39	H	H	68.1

Table 6-11. Radiated Spurious Data (Band 5 – High Channel)

OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 19975
 MEASURED OUTPUT POWER: 21.14 dBm = 0.130 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.14 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3425.00	-58.27	9.68	-48.59	H	H	69.7
5137.50	-53.50	10.68	-42.82	H	H	64.0
6850.00	-58.47	11.74	-46.73	H	H	67.9

Table 6-12. Radiated Spurious Data (Band 4 – Low Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 95 of 108	

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 22.26 dBm = 0.168 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.26 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3465.00	-57.67	9.71	-47.97	H	H	70.2
5197.50	-52.15	10.59	-41.57	H	H	63.8
6930.00	-58.72	11.75	-46.97	H	H	69.2

Table 6-13. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY: 1752.50 MHz
 CHANNEL: 1753
 MEASURED OUTPUT POWER: 21.58 dBm = 0.144 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.58 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3505.00	-57.19	9.73	-47.47	H	H	69.0
5257.50	-52.34	10.64	-41.70	H	H	63.3
7010.00	-58.65	11.75	-46.90	H	H	68.5

Table 6-14. Radiated Spurious Data (Band 4 – High Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 96 of 108	

OPERATING FREQUENCY: 1850.70 MHz
 CHANNEL: 18607
 MEASURED OUTPUT POWER: 25.34 dBm = 0.342 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.34 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3701.40	-56.97	9.44	-47.54	H	H	72.9
5552.10	-47.66	10.79	-36.87	H	H	62.2
7402.80	-54.48	10.69	-43.79	H	H	69.1

Table 6-15. Radiated Spurious Data (Band 2 – Low Channel)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 23.25 dBm = 0.211 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.25 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3760.00	-55.76	9.28	-46.47	H	H	69.7
5640.00	-46.32	11.03	-35.29	H	H	58.5
7520.00	-55.05	10.97	-44.07	H	H	67.3

Table 6-16. Radiated Spurious Data (Band 2 – Mid Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 97 of 108	

OPERATING FREQUENCY: 1909.30 MHz
 CHANNEL: 19193
 MEASURED OUTPUT POWER: 21.17 dBm = 0.131 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.17 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3818.60	-53.93	9.19	-44.74	H	H	65.9
5727.90	-47.96	11.28	-36.68	H	H	57.8
7637.20	-56.20	11.17	-45.03	H	H	66.2

Table 6-17. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 98 of 108

6.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 99 of 108	

Band 17 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23090
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	710,000,004	4	0.0000006
100 %		- 30	709,999,995	-5	-0.0000007
100 %		- 20	710,000,012	12	0.0000017
100 %		- 10	709,999,976	-24	-0.0000034
100 %		0	709,999,985	-15	-0.0000021
100 %		+ 10	710,000,017	17	0.0000024
100 %		+ 20	709,999,970	-30	-0.0000042
100 %		+ 30	709,999,989	-11	-0.0000015
100 %		+ 40	710,000,008	8	0.0000011
100 %		+ 50	709,999,995	-5	-0.0000007
BATT. ENDPOINT	3.55	+ 20	710,000,003	3	0.0000004

Table 6-18. Frequency Stability Data (Band 17)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 100 of 108	

Band 17 Frequency Stability Measurements
§2.1055 §27.54

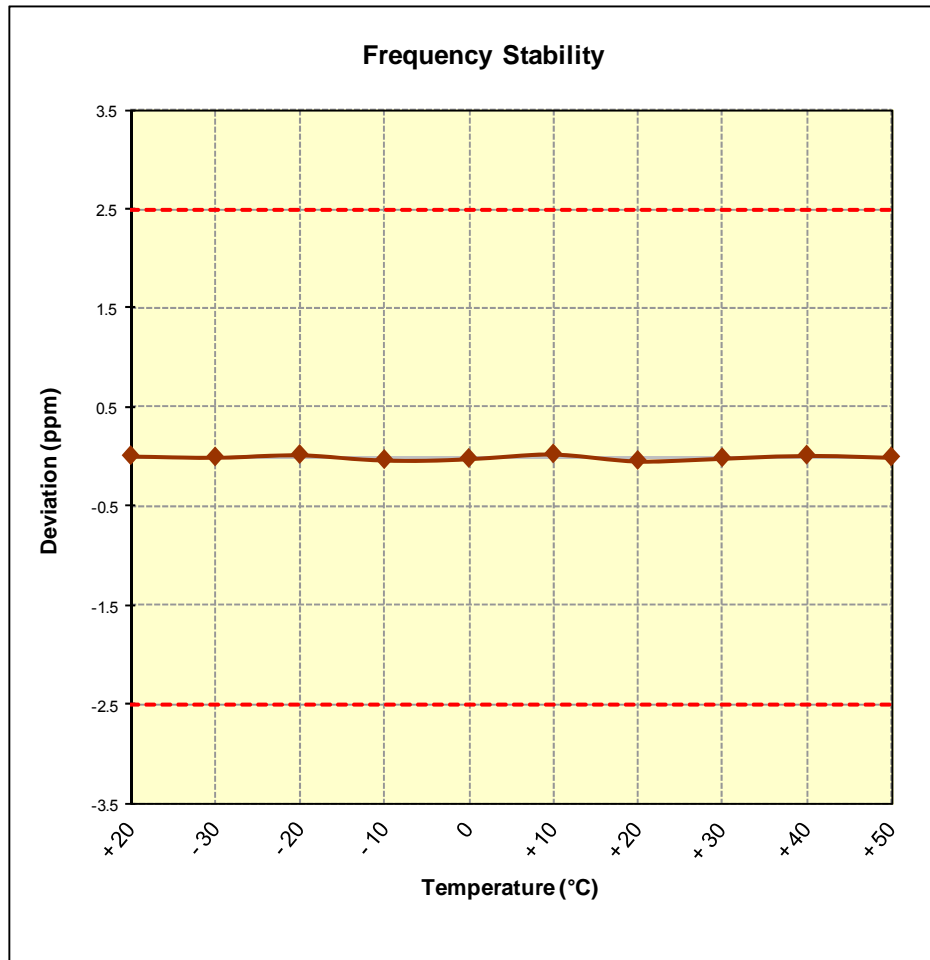


Figure 6-7. Frequency Stability Graph (Band 17)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 101 of 108	

Band 5 Frequency Stability Measurements

§2.1055 §22.355

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,981	-19	-0.0000023
100 %		- 30	836,499,983	-17	-0.0000020
100 %		- 20	836,499,994	-6	-0.0000007
100 %		- 10	836,499,994	-6	-0.0000007
100 %		0	836,499,996	-4	-0.0000005
100 %		+ 10	836,499,983	-17	-0.0000020
100 %		+ 20	836,500,017	17	0.0000020
100 %		+ 30	836,500,015	15	0.0000018
100 %		+ 40	836,500,001	1	0.0000001
100 %		+ 50	836,500,004	4	0.0000005
BATT. ENDPOINT	3.55	+ 20	836,499,975	-25	-0.0000030

Table 6-19. Frequency Stability Data (Band 5)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 102 of 108	

Band 5 Frequency Stability Measurements
§2.1055 §22.355

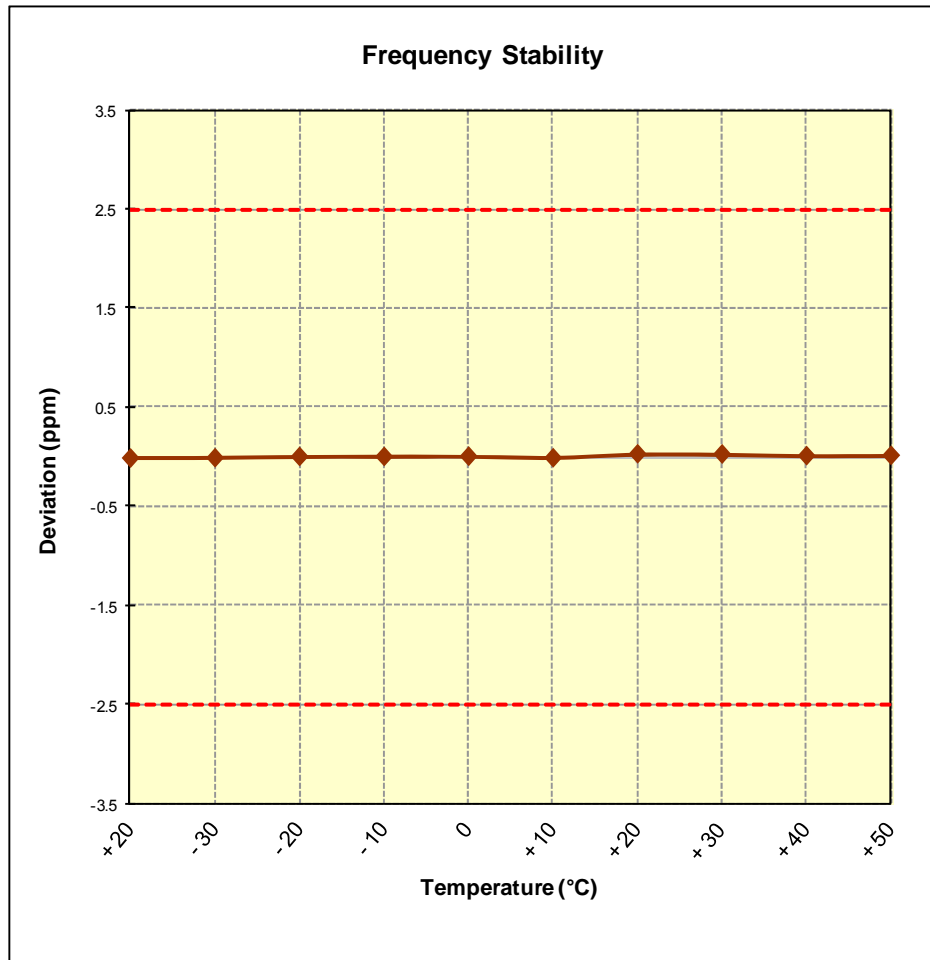



Figure 6-8. Frequency Stability Graph (Band 5)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 103 of 108	

Band 4 Frequency Stability Measurements
§2.1055 §§27.54



OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,499,981	-19	-0.0000011
100 %		- 30	1,732,499,989	-11	-0.0000006
100 %		- 20	1,732,499,984	-16	-0.0000009
100 %		- 10	1,732,499,981	-19	-0.0000011
100 %		0	1,732,499,990	-10	-0.0000006
100 %		+ 10	1,732,500,021	21	0.0000012
100 %		+ 20	1,732,500,002	2	0.0000001
100 %		+ 30	1,732,499,991	-9	-0.0000005
100 %		+ 40	1,732,500,023	23	0.0000013
100 %		+ 50	1,732,499,985	-15	-0.0000009
BATT. ENDPOINT	3.55	+ 20	1,732,500,026	26	0.0000015

Table 6-20. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 104 of 108	

Band 4 Frequency Stability Measurements
§2.1055 §§27.54

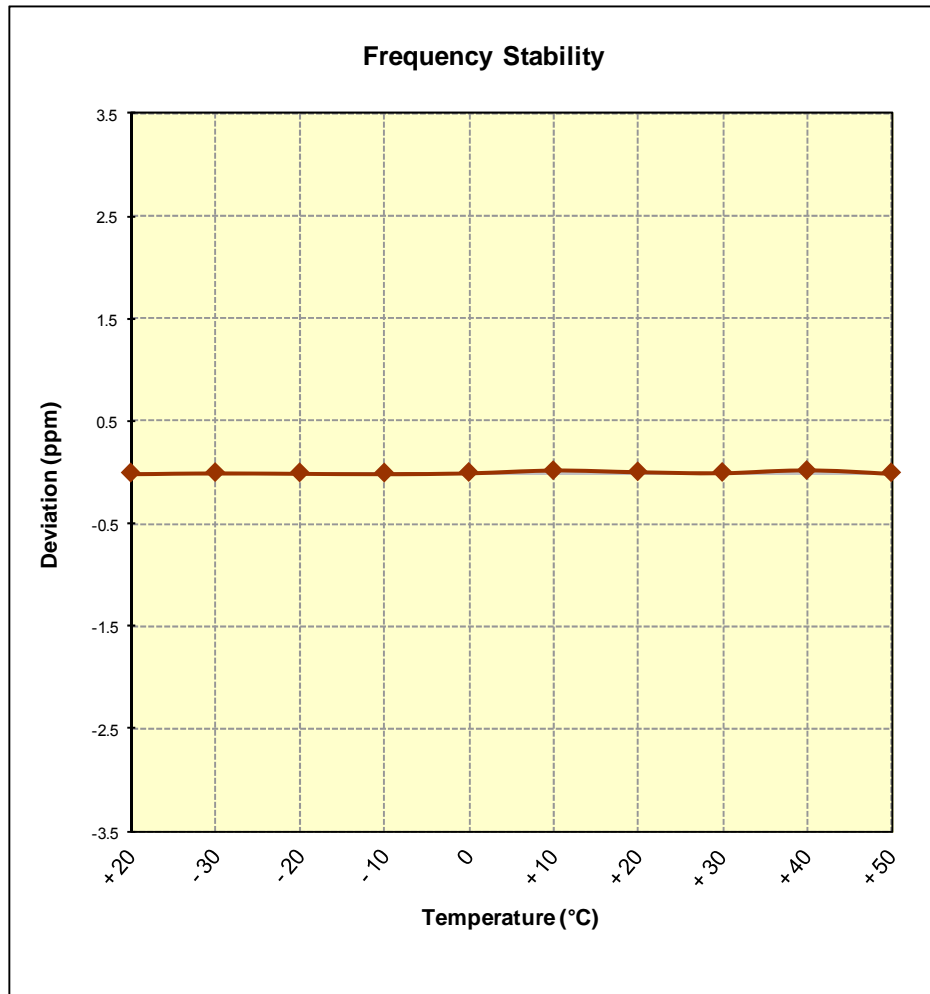


Figure 6-9. Frequency Stability Graph (Band 4)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 105 of 108	

Band 2 Frequency Stability Measurements

§2.1055 §24.235



OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,993	-7	-0.0000004
100 %		- 30	1,880,000,015	15	0.0000008
100 %		- 20	1,879,999,980	-20	-0.0000011
100 %		- 10	1,880,000,009	9	0.0000005
100 %		0	1,880,000,003	3	0.0000002
100 %		+ 10	1,880,000,004	4	0.0000002
100 %		+ 20	1,879,999,994	-6	-0.0000003
100 %		+ 30	1,880,000,008	8	0.0000004
100 %		+ 40	1,880,000,007	7	0.0000004
100 %		+ 50	1,879,999,986	-14	-0.0000007
BATT. ENDPOINT	3.55	+ 20	1,879,999,977	-23	-0.0000012

Table 6-21. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 106 of 108	

Band 2 Frequency Stability Measurements
§2.1055 §24.235

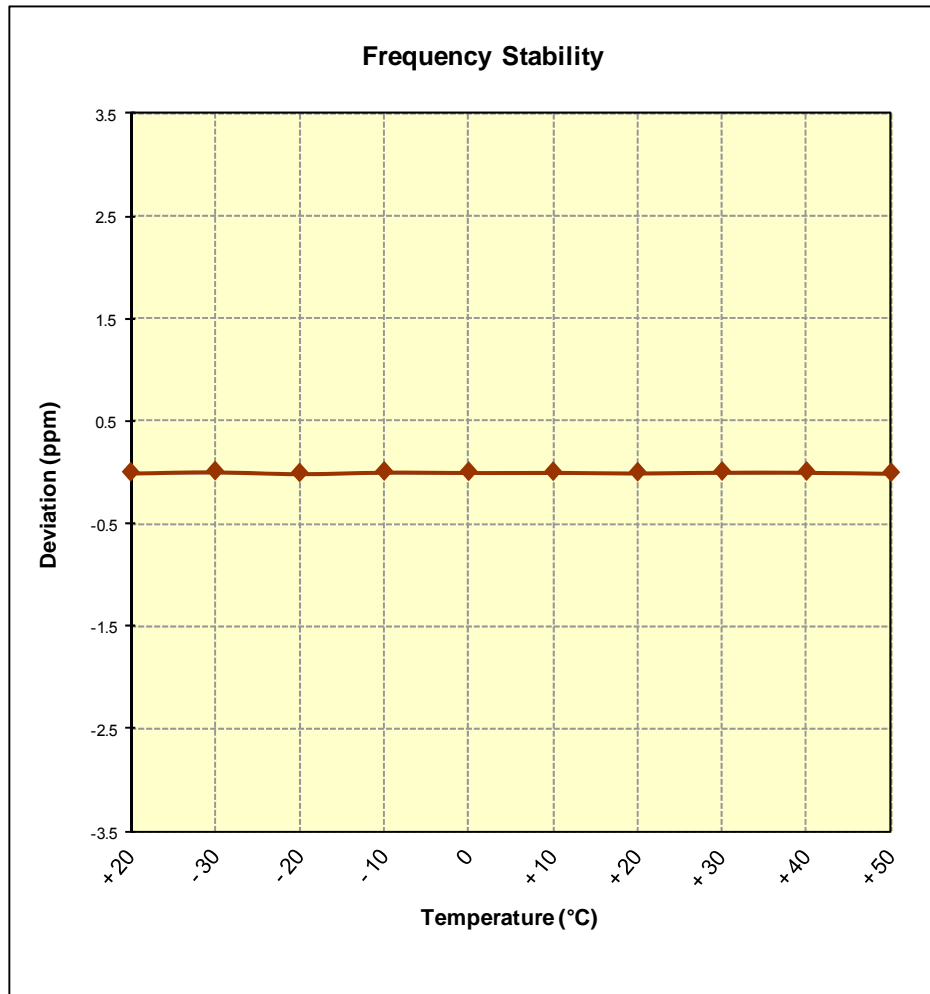




Figure 6-10. Frequency Stability Graph (Band 2)

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 107 of 108	

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG850M** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: A3LSMG850M		FCC Pt. 22, 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407111377.A3L	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 108 of 108