

FCC DTS REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Address:

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:

April 23, 2018

Test Site/Location:

HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1804-FC035**FCC ID:** A3LSMG8750**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model:** SM-G8750**EUT Type:** Mobile Phone**Average Output Power:** Wi-Fi 802.11b(19.36 dBm) / Wi-Fi 802.11g (18.11 dBm) /
Wi-Fi 802.11n_HT20 (17.06 dBm)**Frequency Range:** 2412 MHz - 2462 MHz (2.4 GHz Band)**Modulation type:** CCK/DSSS/OFDM**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by : Jung Ki Lim**
Engineer of Telecommunication testing center**Approved by : Jong Seok Lee**
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1804-FC035	April 23, 2018	- First Approval Report

Table of Contents

- 1. GENERAL INFORMATION 4
- 2. EUT DESCRIPTION 4
- 3. TEST METHODOLOGY 5
 - 3.1 EUT CONFIGURATION 5
 - 3.2 EUT EXERCISE 5
 - 3.3 GENERAL TEST PROCEDURES 5
 - 3.4 DESCRIPTION OF TEST MODES 5
- 4. INSTRUMENT CALIBRATION..... 6
- 5. FACILITIES AND ACCREDITATIONS 6
 - 5.1 FACILITIES 6
 - 5.2 EQUIPMENT 6
- 6. ANTENNA REQUIREMENTS 6
- 7. MEASUREMENT UNCERTAINTY 7
- 8. CONFIRMATION OF GEO-LOCATION MECHANISM..... 8
- 9. SUMMARY TEST OF RESULTS 9
- 10. TEST RESULT 10
 - 10.1 DUTY CYCLE..... 10
 - 10.2 6dB BANDWIDTH 12
 - 10.3 OUTPUT POWER (802.11b/g/n)..... 16
 - 10.4 POWER SPECTRAL DENSITY (802.11b/g/n)..... 23
 - 10.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 27
 - 10.6 RADIATED MEASUREMENT..... 40
 - 10.6.1 RADIATED SPURIOUS EMISSIONS..... 40
 - 10.6.2 RADIATED RESTRICTED BAND EDGES 54
 - 10.7 POWERLINE CONDUCTED EMISSIONS 58
- 11. LIST OF TEST EQUIPMENT 67
 - 11.1 LIST OF TEST EQUIPMENT(Conducted Test) 67
 - 11.2 LIST OF TEST EQUIPMENT(Radiated Test)..... 68

1. GENERAL INFORMATION

Applicant: SAMSUNG Electronics Co., Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID: A3LSMG8750
EUT Type: Mobile Phone
Model: SM-G8750
Date(s) of Tests: March 30, 2018 ~ April 23, 2018
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

2. EUT DESCRIPTION

Model	SM-G8750	
EUT Type	Mobile Phone	
Power Supply	DC 4.00 V	
Frequency Range	TX: 2412 MHz ~ 2462 MHz RX: 2412 MHz ~ 2462 MHz	
Max. RF Output Power	Peak	Wi-Fi 802.11b(22.62 dBm) / Wi-Fi 802.11g (25.77 dBm) / Wi-Fi 802.11n_HT20 (25.72 dBm)
	Average	Wi-Fi 802.11b(19.36 dBm) / Wi-Fi 802.11g (18.11 dBm) / Wi-Fi 802.11n_HT20 (17.06 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Antenna type: LDS + Frame Peak Gain : -3.46 dBi	

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v04 dated April 05, 2017 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074 v04)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70

8. CONFIRMATION OF GEO-LOCATION MECHANISM

The device uses a geo-location mechanism based on the cellular MCC codes in order to only enable certain WLAN DTS bands when the device is not in the USA.

The validation of this mechanism is provided below. The device was configured for AP and the MCC code was adjusted on the test set between the US MCC and then an MCC code valid for a country where the WLAN DTS band is supported.

WLAN	MCC = USA	MCC = non US
CH 12	Did not connect	Connected (Korea)
CH 13	Did not connect	Connected (Korea)

The verification tests confirmed the operational of the geo-location mechanism.

9. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 10.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 10.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 10.6.2		PASS

10. TEST RESULT


10.1 DUTY CYCLE

■ TEST PROCEDURE

According to Section 6.0)b) in KDB 558074 v04

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

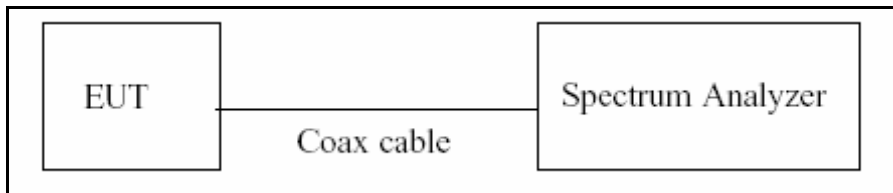

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v04

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

■ Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
b	1 Mbps	8.627	8.718	0.98960739	0.045
	2 Mbps	4.309	4.410	0.97709922	0.101
	5.5 Mbps	1.630	1.716	0.94979806	0.224
	11 Mbps	0.862	0.951	0.90703221	0.424
g	6 Mbps	1.432	1.527	0.93775167	0.279
	9 Mbps	0.960	1.056	0.90981432	0.410
	12 Mbps	0.728	0.822	0.88535719	0.529
	18 Mbps	0.492	0.593	0.82992136	0.810
	24 Mbps	0.377	0.468	0.80481633	0.943
	36 Mbps	0.256	0.351	0.72973004	1.368
	48 Mbps	0.200	0.292	0.68606343	1.636
	54 Mbps	0.180	0.287	0.62723512	2.026
n_HT20	MCS0_6.5 Mbps	1.340	1.446	0.92647272	0.332
	MCS1_13 Mbps	0.688	0.794	0.86649874	0.622
	MCS2_19.5 Mbps	0.473	0.567	0.83408061	0.788
	MCS3_26 Mbps	0.364	0.458	0.79472934	0.998
	MCS4_39 Mbps	0.256	0.347	0.73780451	1.321
	MCS5_52 Mbps	0.200	0.307	0.65103571	1.864
	MCS6_58.5 Mbps	0.184	0.277	0.66259363	1.788
	MCS7_65 Mbps	0.168	0.263	0.63841033	1.949

Note : Duty Cycle Factor = 10*log(1/Duty Cycle). where, Duty Cycle = T_{on} / T_{total}


10.2 6dB BANDWIDTH

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.1 in KDB 558074 v04)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

■ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	8.053	0.5	Pass
2437	6	8.056	0.5	Pass
2462	11	8.056	0.5	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.39	0.5	Pass
2437	6	15.34	0.5	Pass
2462	11	15.16	0.5	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_HT20

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.72	0.5	Pass
2437	6	15.19	0.5	Pass
2462	11	15.18	0.5	Pass


Note : In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 1)

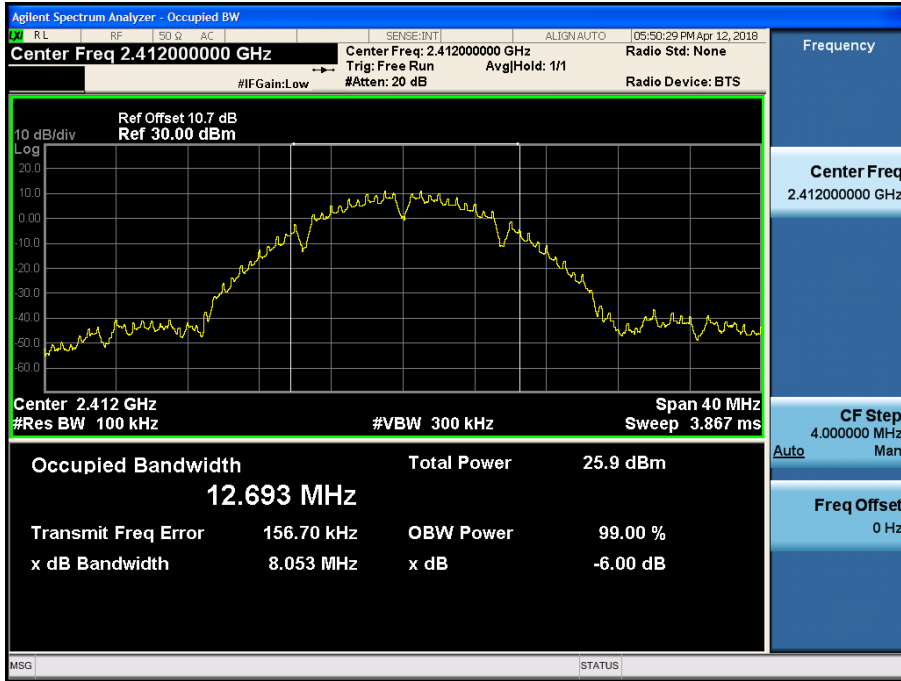

6dB Bandwidth plot (802.11g-CH 11)

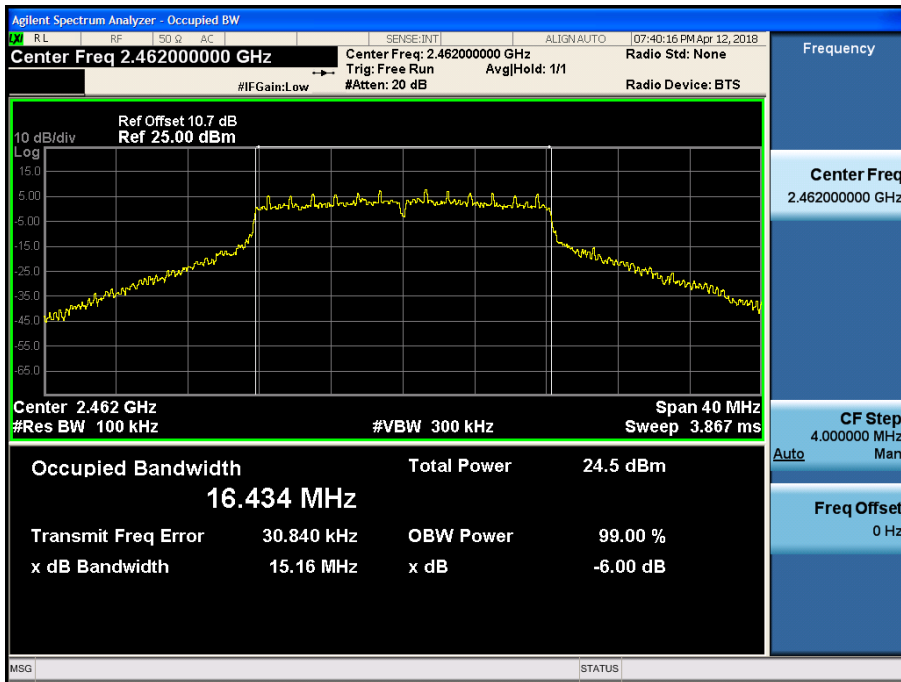

6dB Bandwidth plot (802.11n_HT20-CH 11)

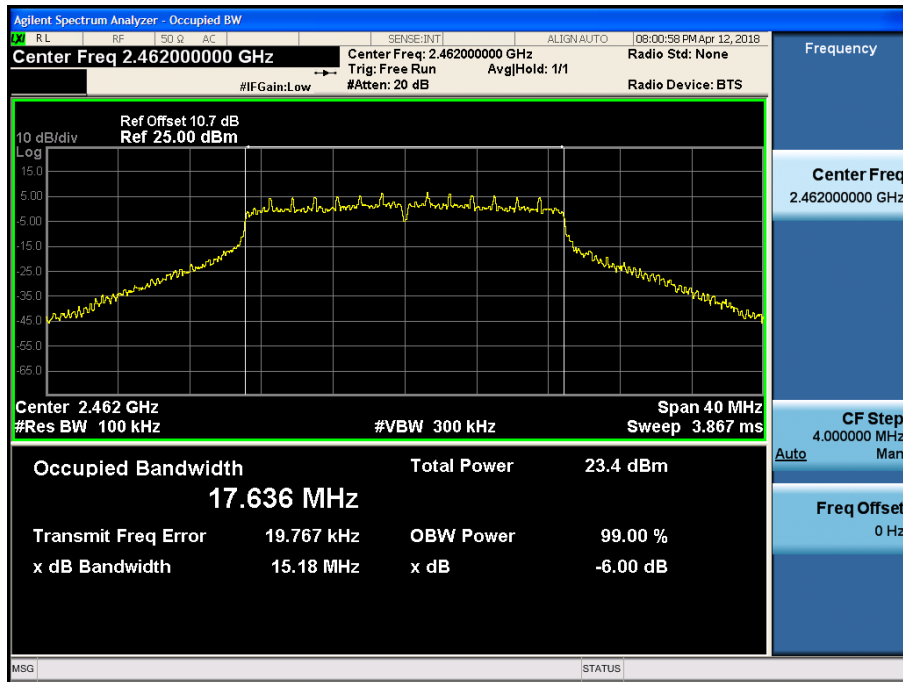


10.3 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION(20 MHz BW)



■ TEST PROCEDURE(20 MHz BW)

- Peak Power (Procedure 9.1.3 in KDB 558074 v04)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074 v04)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency[MHz]	Loss[dB]
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

▣ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Power Level Setting	Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[MHz]	Channel No.				
2412	1	19	1 Mbps	21.78	30
			2 Mbps	22.02	30
			5.5 Mbps	22.04	30
			11 Mbps	22.08	30
2437	6	19	1 Mbps	22.19	30
			2 Mbps	22.58	30
			5.5 Mbps	22.61	30
			11 Mbps	22.62	30
2462	11	19	1 Mbps	21.70	30
			2 Mbps	22.01	30
			5.5 Mbps	21.94	30
			11 Mbps	22.03	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Power Level Setting	Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[MHz]	Channel No.				
2412	1	17	6 Mbps	21.08	30
			9 Mbps	21.14	30
			12 Mbps	21.02	30
			18 Mbps	23.14	30
			24 Mbps	23.12	30
			36 Mbps	25.00	30
			48 Mbps	25.11	30
			54 Mbps	24.99	30
2437	6	18	6 Mbps	22.01	30
			9 Mbps	22.00	30
			12 Mbps	22.04	30
			18 Mbps	23.96	30
			24 Mbps	23.93	30
			36 Mbps	25.72	30
			48 Mbps	25.74	30
			54 Mbps	25.77	30
2462	11	18	6 Mbps	21.86	30
			9 Mbps	21.96	30
			12 Mbps	21.88	30
			18 Mbps	24.10	30
			24 Mbps	24.19	30
			36 Mbps	25.62	30
			48 Mbps	25.57	30
			54 Mbps	25.58	30

Conducted Output Power Measurements (802.11n_HT20 Mode)

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Limit [dBm]
Frequency[MHz]	Channel No.				
2412	1	17	0	20.96	30
			1	21.03	30
			2	23.00	30
			3	22.97	30
			4	24.80	30
			5	24.92	30
			6	25.04	30
			7	25.00	30
2437	6	17	0	20.78	30
			1	20.72	30
			2	22.88	30
			3	22.85	30
			4	25.58	30
			5	25.48	30
			6	25.72	30
			7	25.56	30
2462	11	17	0	20.97	30
			1	21.02	30
			2	22.87	30
			3	22.72	30
			4	25.55	30
			5	24.99	30
			6	25.51	30
			7	25.09	30

■ TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Power Level Setting	Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	19	1 Mbps	18.75	0.045	18.80	30
			2 Mbps	18.94	0.101	19.04	30
			5.5 Mbps	18.86	0.224	19.08	30
			11 Mbps	18.68	0.424	19.11	30
2437	6	19	1 Mbps	18.98	0.045	19.03	30
			2 Mbps	19.16	0.101	19.26	30
			5.5 Mbps	19.05	0.224	19.27	30
			11 Mbps	18.94	0.424	19.36	30
2462	11	19	1 Mbps	18.80	0.045	18.85	30
			2 Mbps	18.96	0.101	19.06	30
			5.5 Mbps	18.84	0.224	19.06	30
			11 Mbps	18.61	0.424	19.03	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Power Level Setting	Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	17	6 Mbps	15.75	0.279	16.03	30
			9 Mbps	15.61	0.410	16.02	30
			12 Mbps	15.43	0.529	15.96	30
			18 Mbps	16.08	0.810	16.89	30
			24 Mbps	15.69	0.943	16.63	30
			36 Mbps	15.46	1.368	16.82	30
			48 Mbps	15.26	1.636	16.90	30
			54 Mbps	15.07	2.026	17.09	30
2437	6	18	6 Mbps	16.74	0.279	17.02	30
			9 Mbps	16.61	0.410	17.02	30
			12 Mbps	16.49	0.529	17.02	30
			18 Mbps	17.09	0.810	17.90	30
			24 Mbps	16.63	0.943	17.57	30
			36 Mbps	16.40	1.368	17.77	30
			48 Mbps	16.21	1.636	17.84	30
			54 Mbps	16.06	2.026	18.08	30
2462	11	18	6 Mbps	16.79	0.279	17.07	30
			9 Mbps	16.67	0.410	17.08	30
			12 Mbps	16.49	0.529	17.02	30
			18 Mbps	17.11	0.810	17.92	30
			24 Mbps	16.73	0.943	17.67	30
			36 Mbps	16.49	1.368	17.86	30
			48 Mbps	16.28	1.636	17.92	30
			54 Mbps	16.09	2.026	18.11	30

Conducted Output Power Measurements (802.11n_HT20 Mode)

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	17	0	15.45	0.332	15.79	30
			1	15.13	0.622	15.75	30
			2	15.87	0.788	16.66	30
			3	15.64	0.998	16.64	30
			4	15.46	1.321	16.78	30
			5	15.13	1.864	16.99	30
			6	15.06	1.788	16.85	30
			7	14.88	1.949	16.83	30
2437	6	17	0	15.30	0.332	15.63	30
			1	14.93	0.622	15.56	30
			2	15.67	0.788	16.46	30
			3	15.42	0.998	16.41	30
			4	15.25	1.321	16.57	30
			5	15.02	1.864	16.88	30
			6	14.94	1.788	16.73	30
			7	14.74	1.949	16.69	30
2462	11	17	0	15.50	0.332	15.83	30
			1	15.22	0.622	15.84	30
			2	15.92	0.788	16.71	30
			3	15.68	0.998	16.68	30
			4	15.54	1.321	16.86	30
			5	15.20	1.864	17.06	30
			6	15.14	1.788	16.93	30
			7	14.93	1.949	16.88	30


10.4 POWER SPECTRAL DENSITY (802.11b/g/n)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ TEST CONFIGURATION



■ TEST PROCEDURE

We tested according to Procedure 10.3 in KDB 558074 v04

The spectrum analyzer is set to :

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 x OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

Note :

- Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- Spectrum offset = Attenuator loss + Cable loss
- We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS


Conducted Power Density Measurements

Frequency [MHz]	Channel No.	Mode	Test Result				
			PSD [dBm]	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor (dB)	Limit [dBm]	Pass/Fail
2412	1	802.11b	-5.623	0.424	-5.199	8	Pass
2437	6		-5.067	0.424	-4.643	8	Pass
2462	11		-5.542	0.101	-5.441	8	Pass
2412	1	802.11g	-14.529	2.026	-12.503	8	Pass
2437	6		-14.710	2.026	-12.684	8	Pass
2462	11		-14.923	2.026	-12.897	8	Pass
2412	1	802.11n _HT20	-14.927	1.864	-13.063	8	Pass
2437	6		-14.486	1.864	-12.622	8	Pass
2462	11		-14.274	1.864	-12.410	8	Pass


Note : In order to simplify the report, attached plots were only the highest PSD channel.

RESULT PLOTS


Power Spectral Density (802.11b-CH 6)

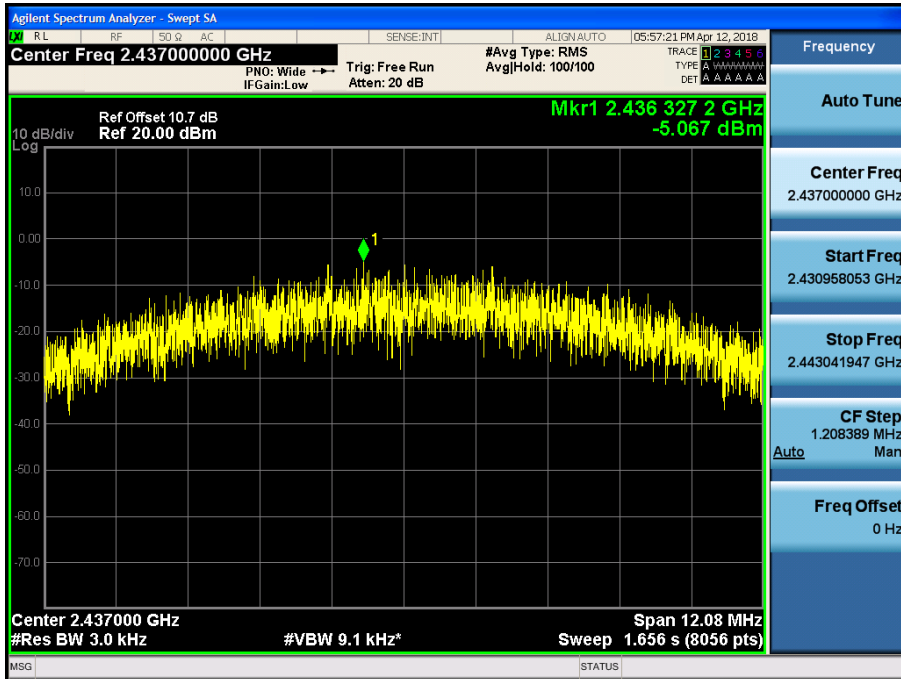

Power Spectral Density (802.11g-CH 1)

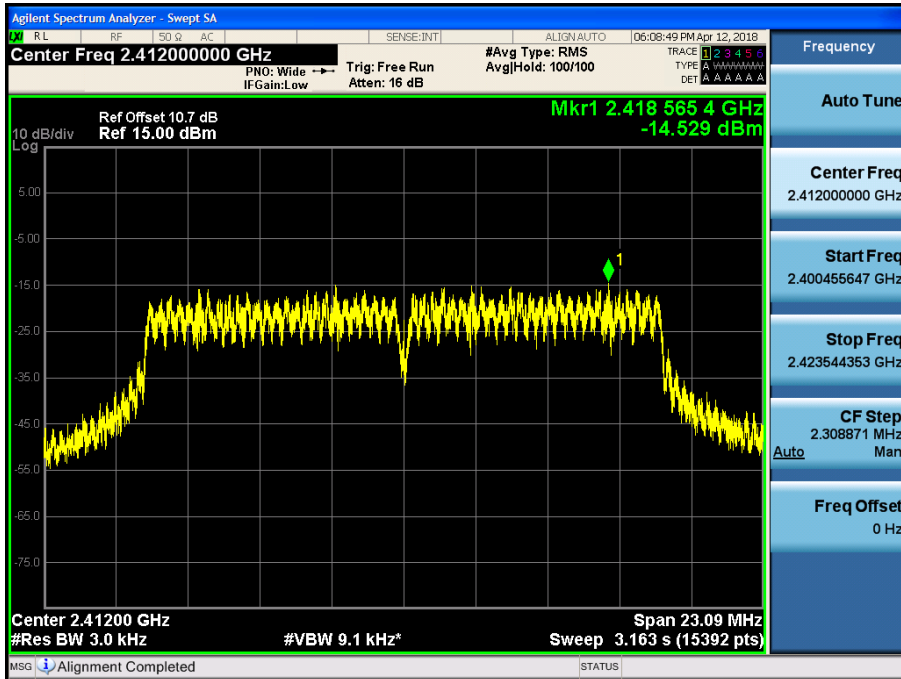


Power Spectral Density (802.11n_HT20 -CH 11)

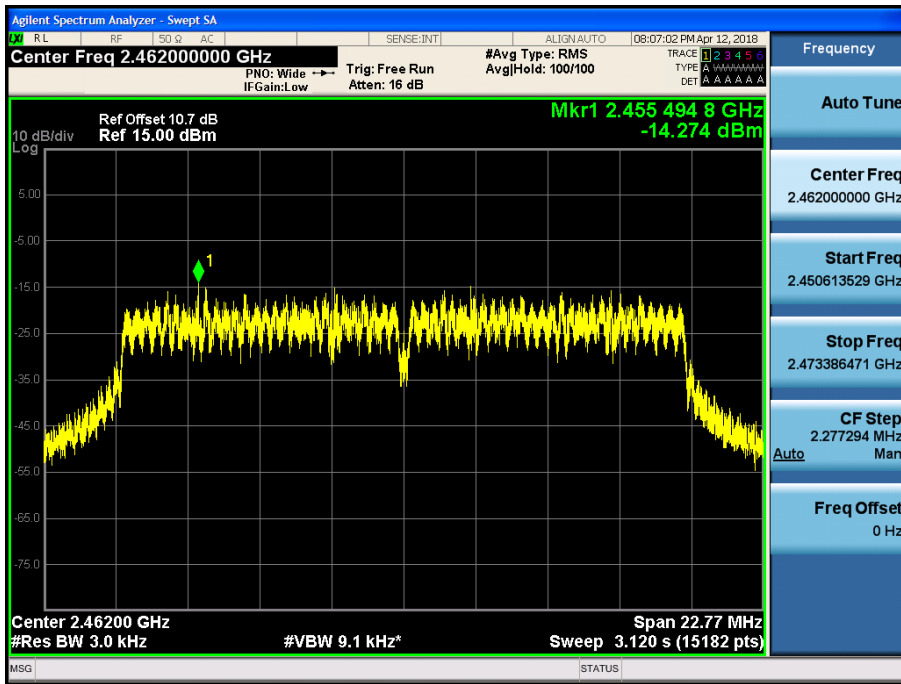

10.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**Test Requirements and limit, §15.247(d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 30 dBc**■ TEST CONFIGURATION****■ TEST PROCEDURE**

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074 v04)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points \geq Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
2. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
3. Spectrum offset = Attenuator loss + Cable loss
4. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

5. In case of conducted spurious emissions test, please check factors blow table.
6. In order to simplify the report, attached plots were only the worst case channel.

■ FACTORS FOR FREQUENCY


Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68

4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53

Note : 1. ** is fundamental frequency range.
2. Factor = Cable loss + Attenuator loss

RESULT PLOTS


Band Edge (802.11b-CH1)

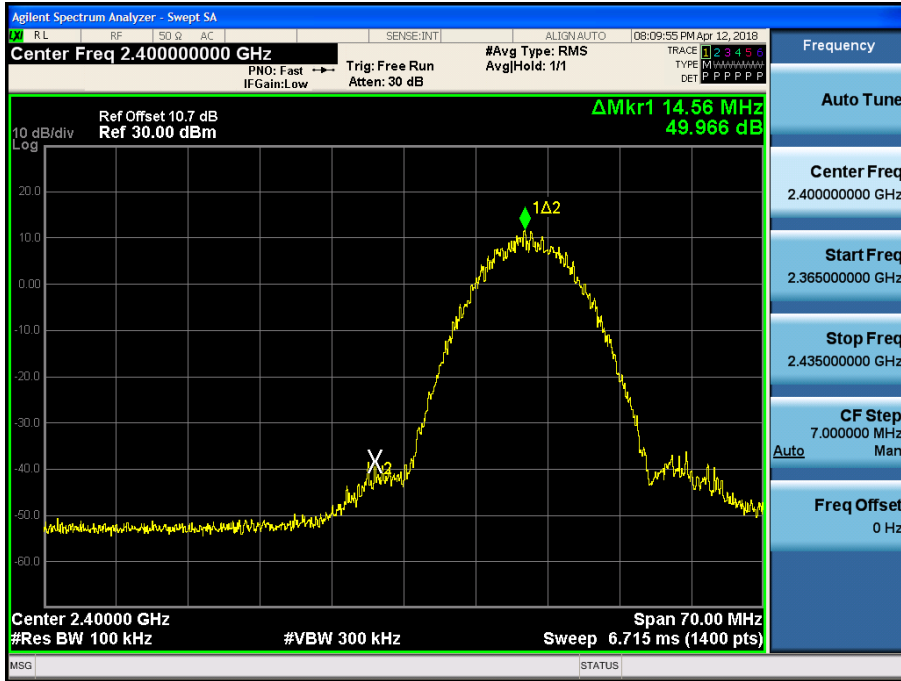

Band Edge (802.11b-CH11)




Band Edge (802.11g-CH1)

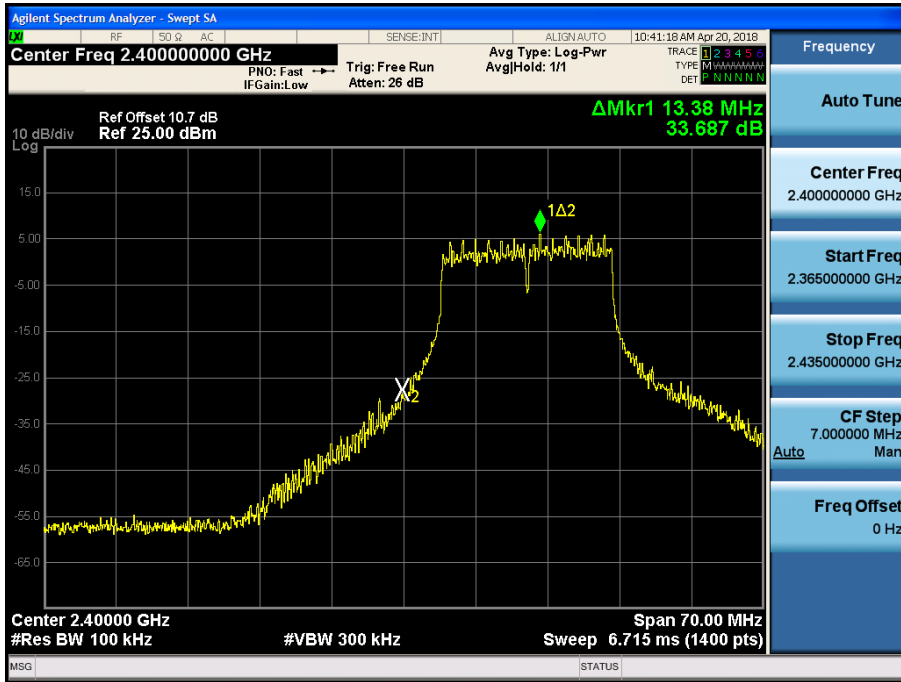


Band Edge (802.11g-CH11)



Band Edge (802.11n_HT20-CH1)

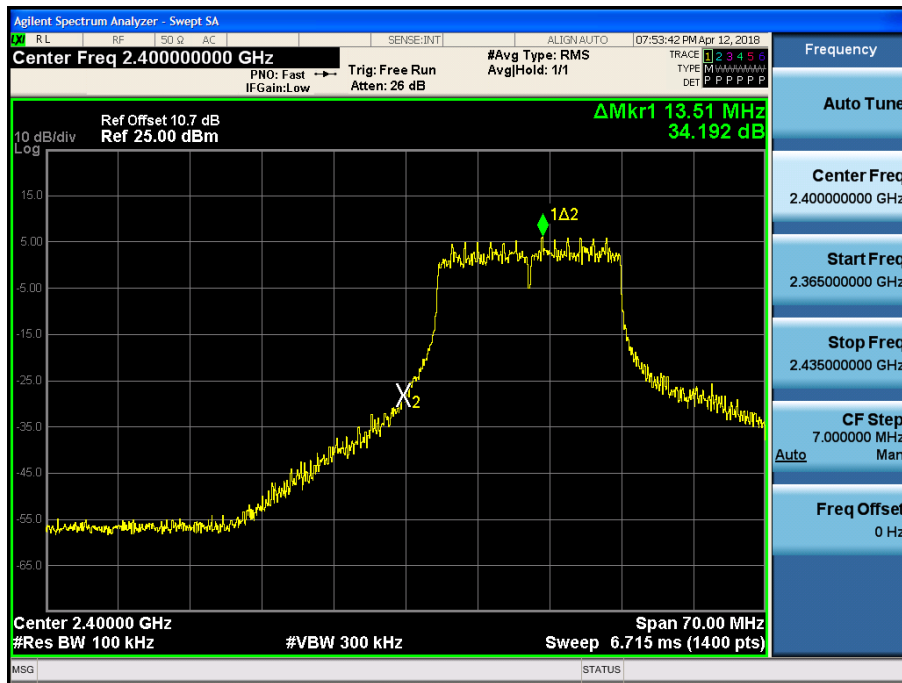


Band Edge (802.11n_HT20-CH11)

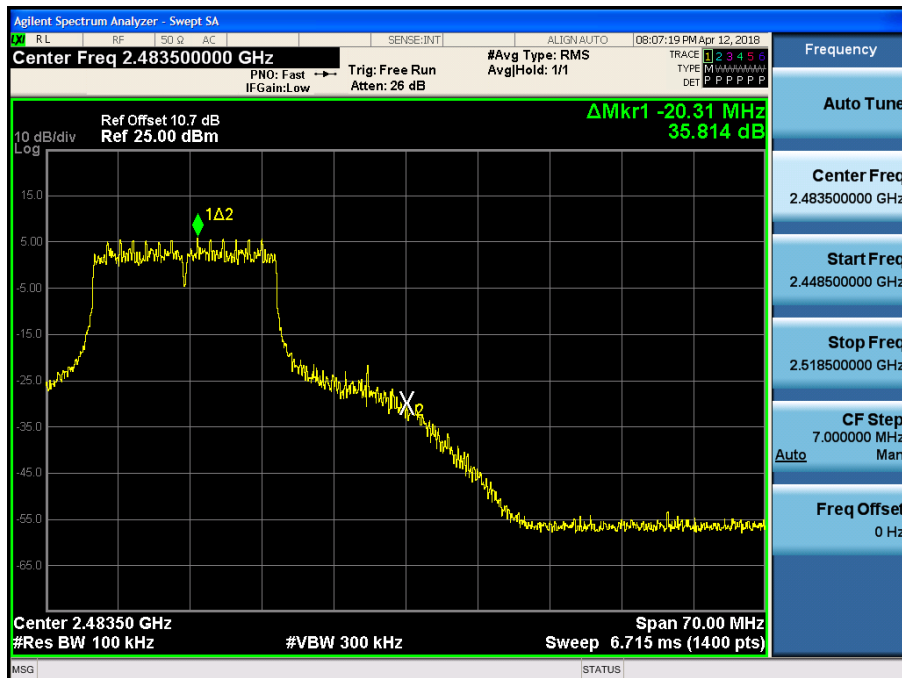


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

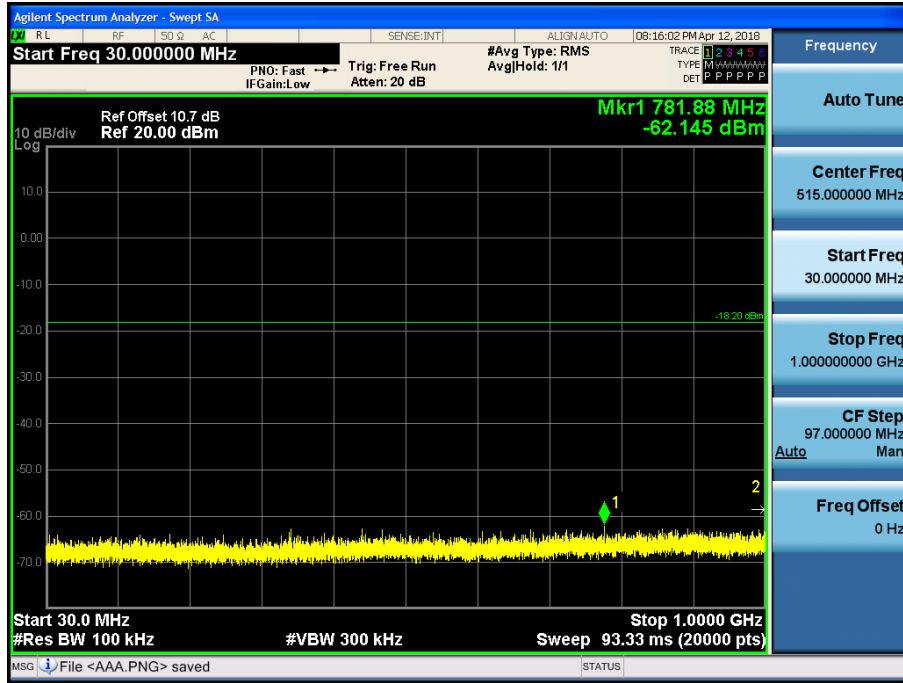


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

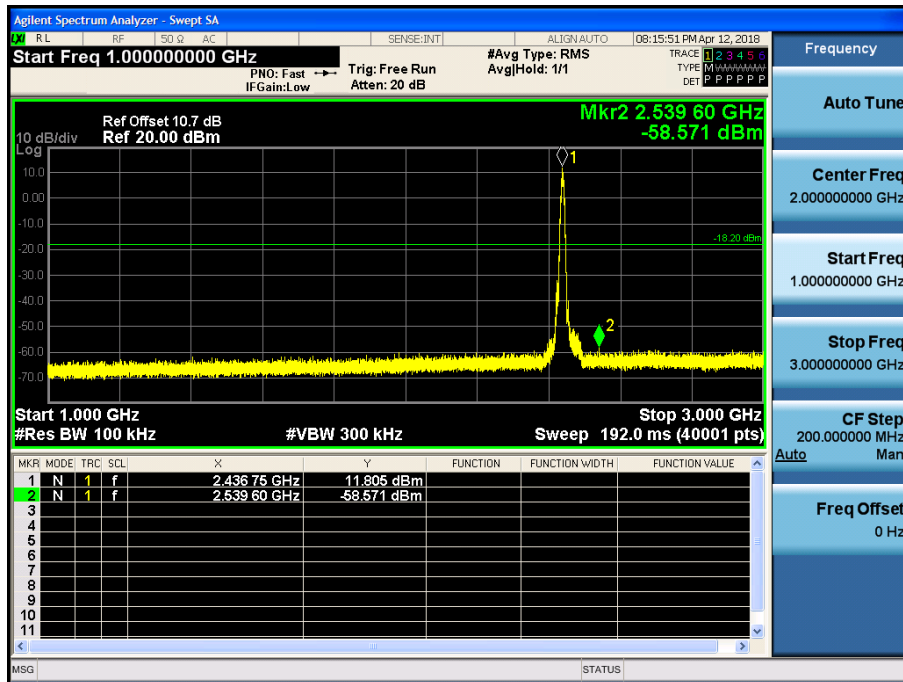


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

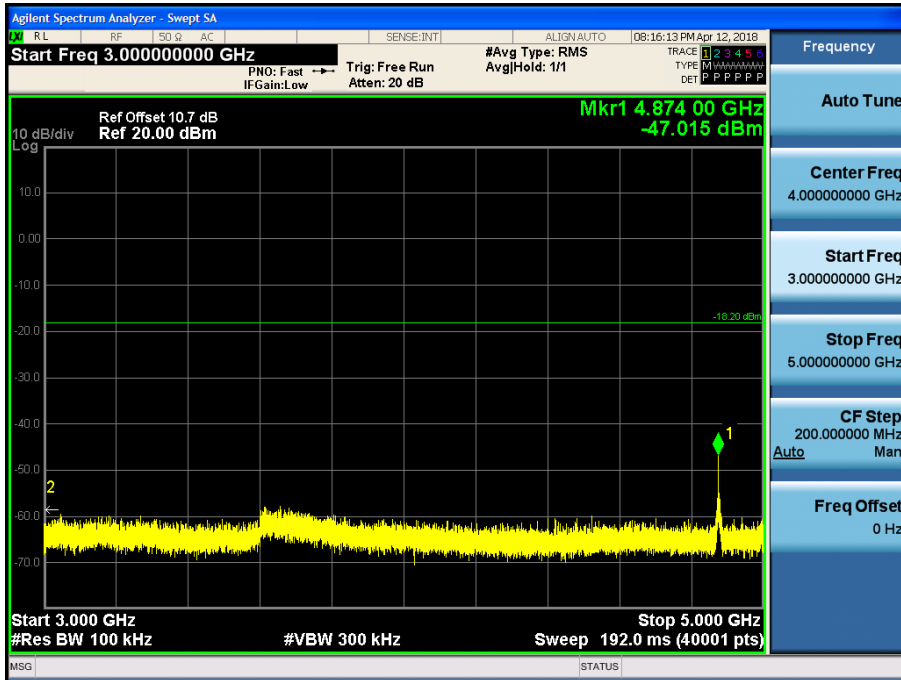


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

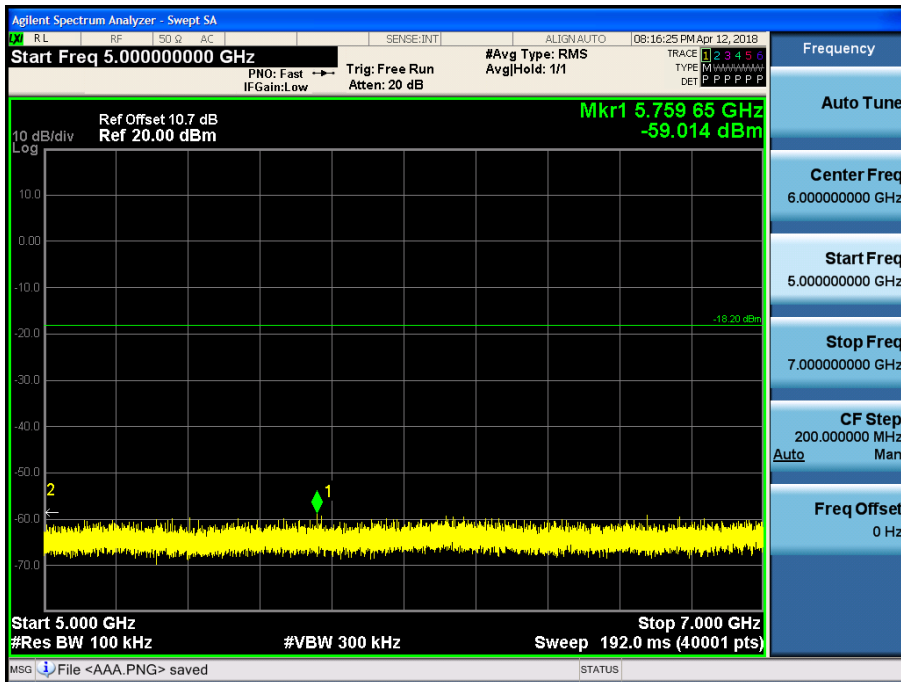


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

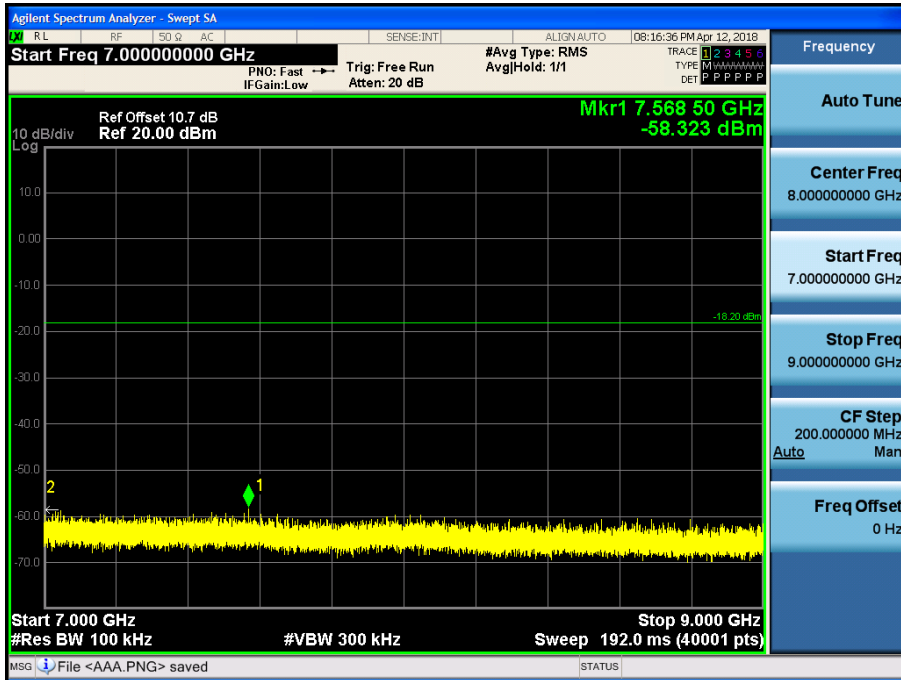


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6 11 Mbps)

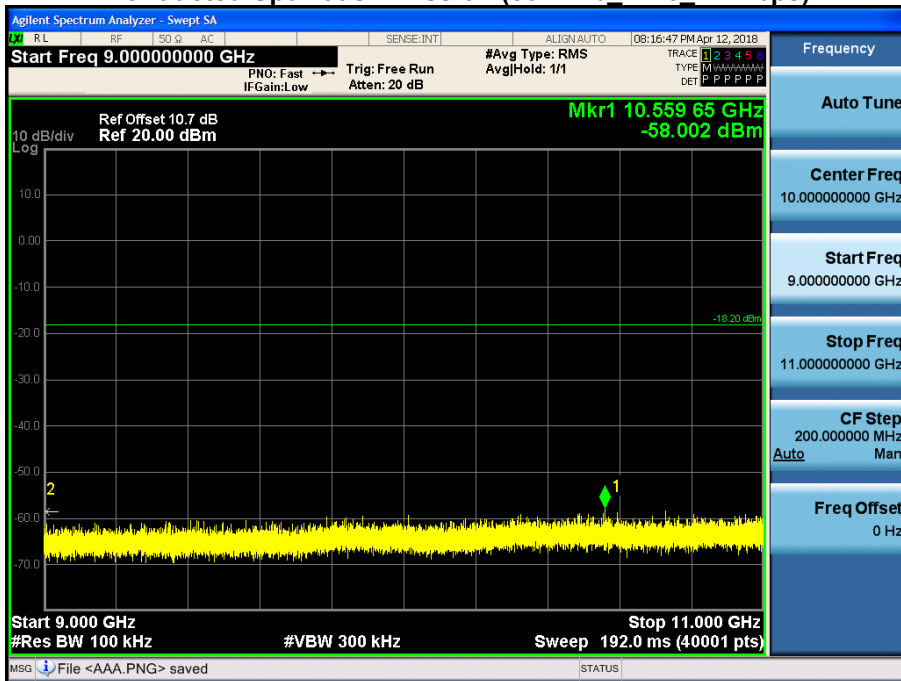


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

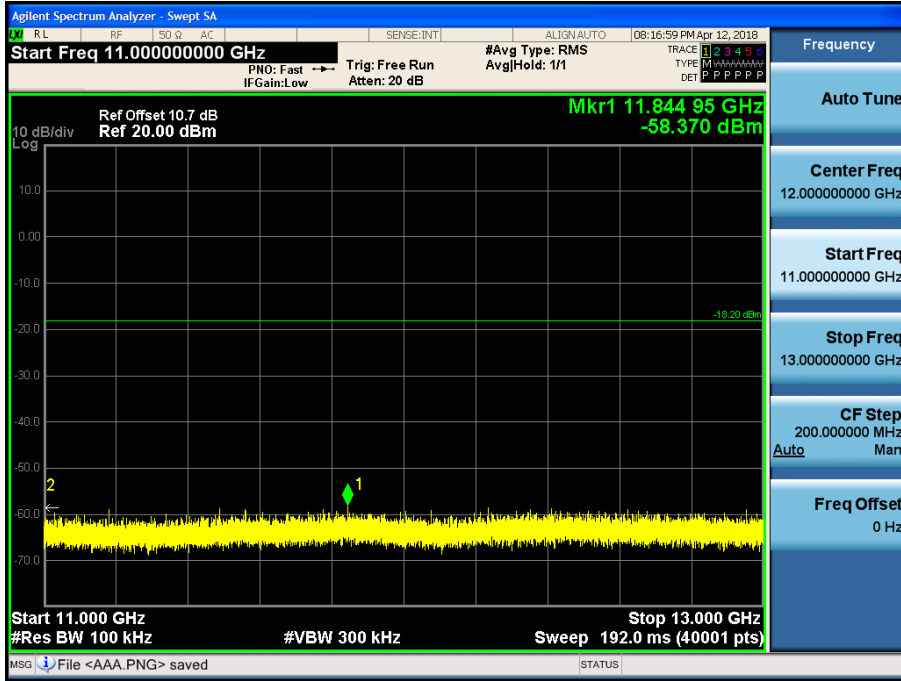


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6 11 Mbps)

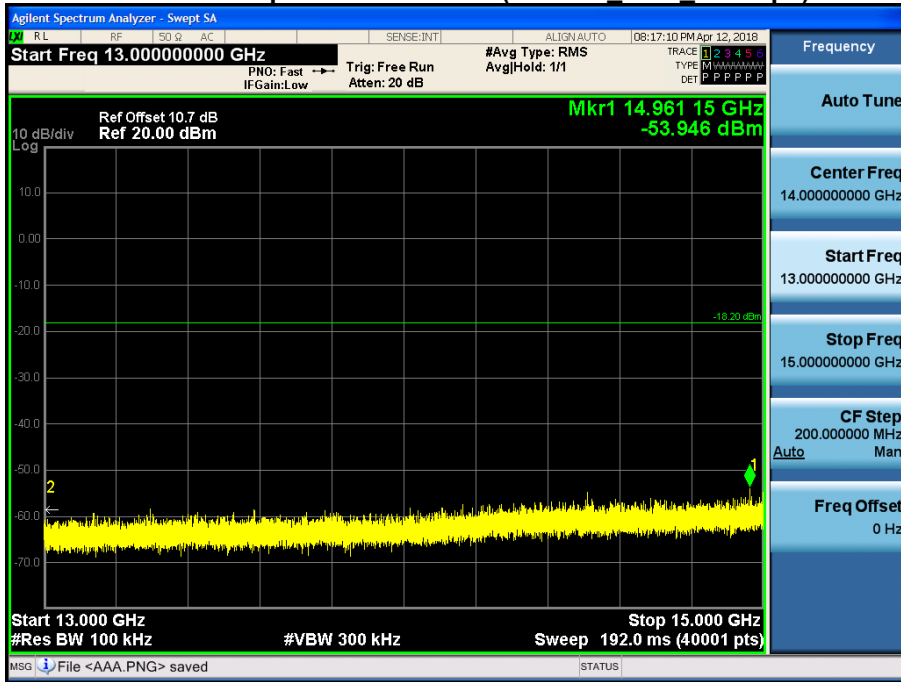


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b Ch.6 11 Mbps)

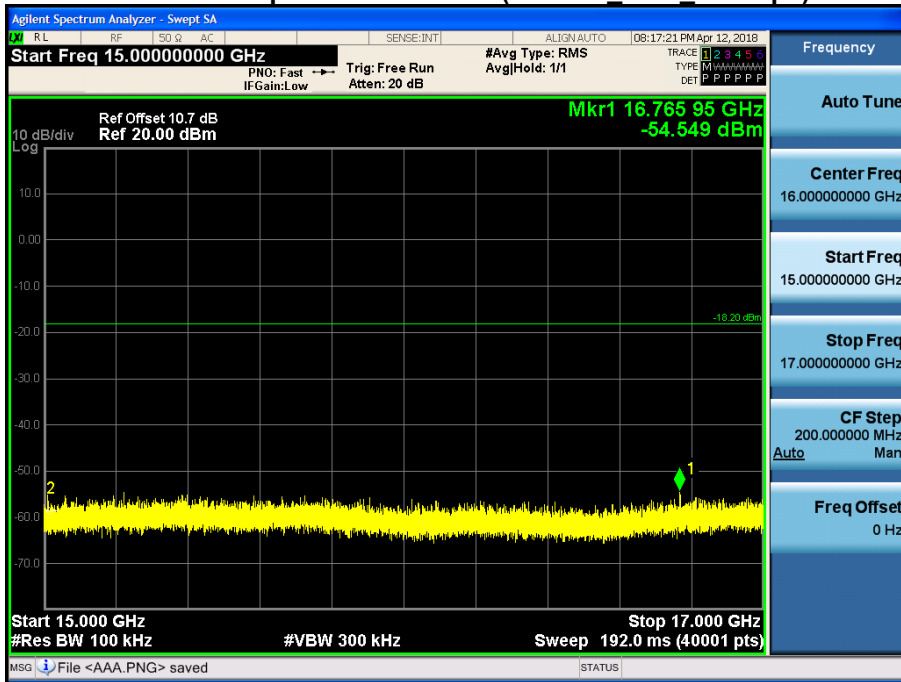


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b Ch.6 11 Mbps)

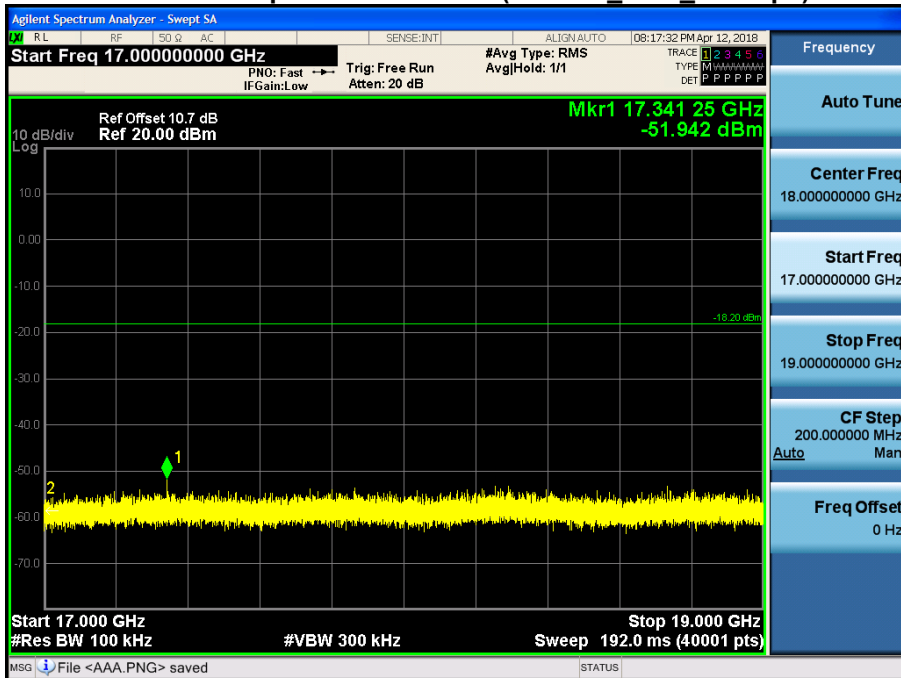


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6 11 Mbps)

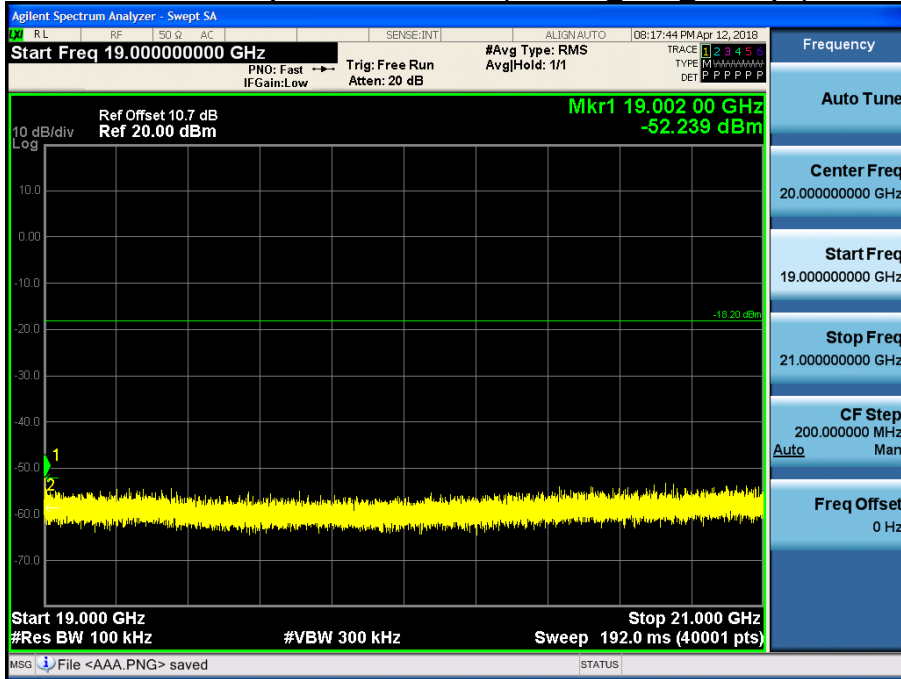


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

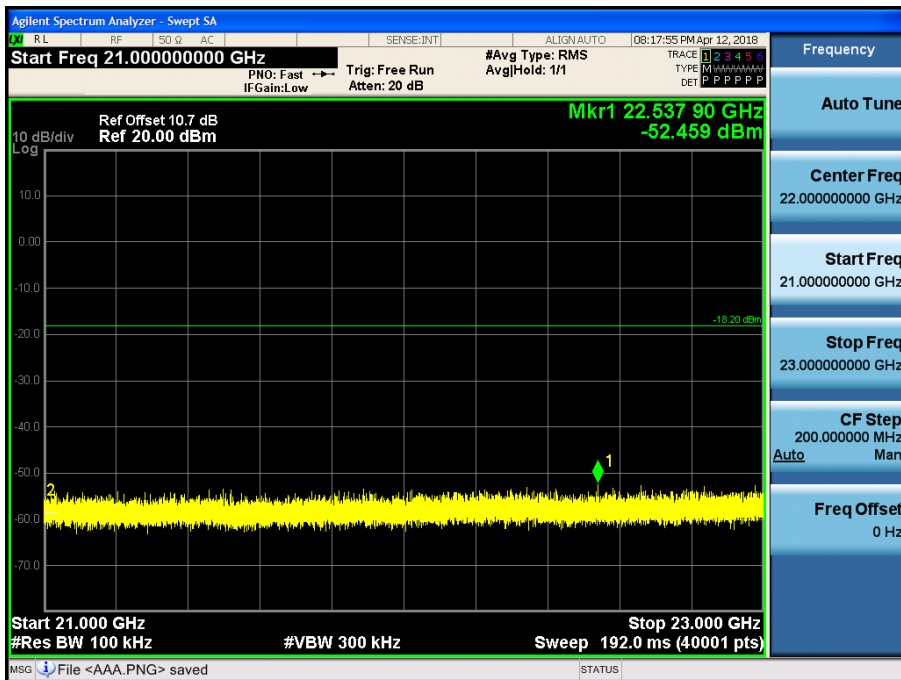

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

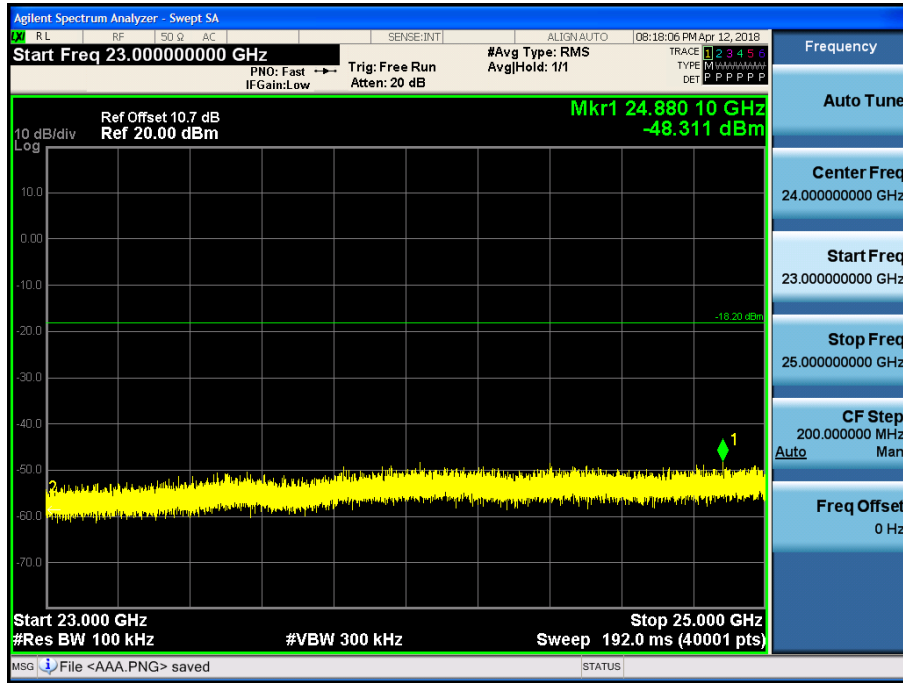


10.6 RADIATED MEASUREMENT.**10.6.1 RADIATED SPURIOUS EMISSIONS.**

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

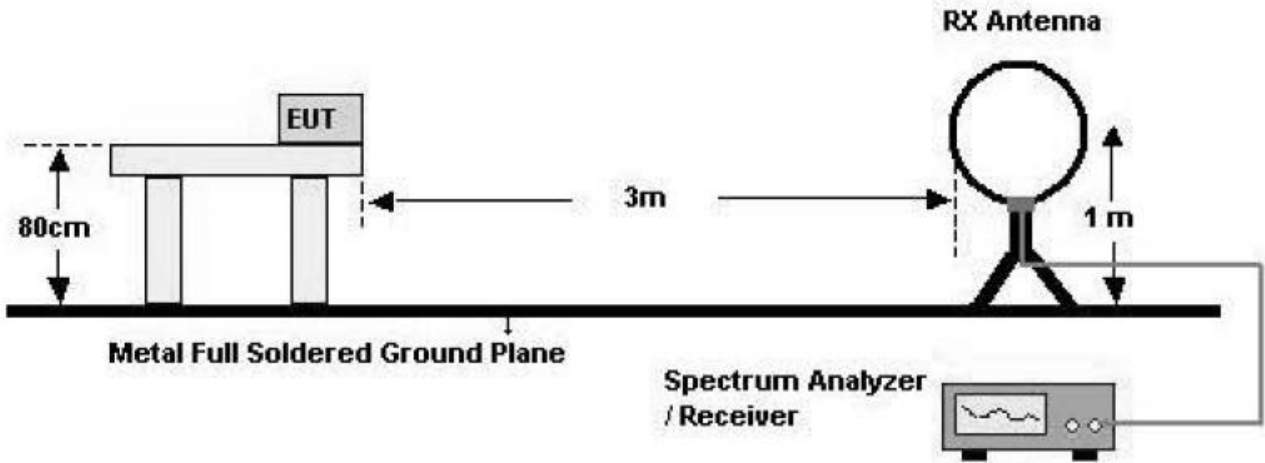

30 MHz - 1 GHz

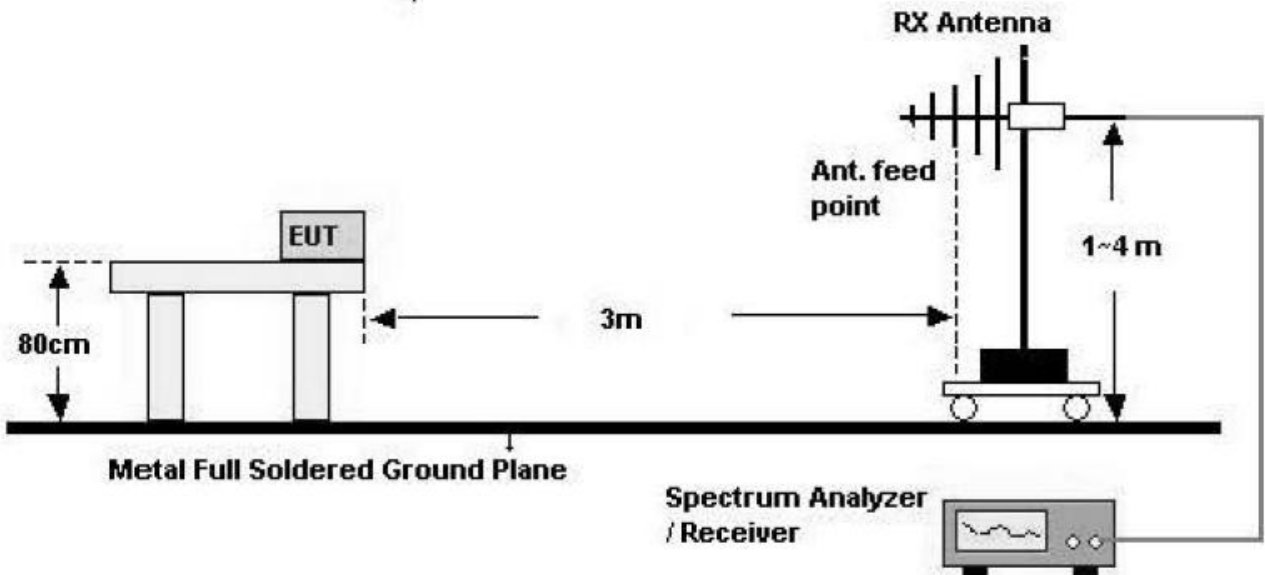

Above 1 GHz

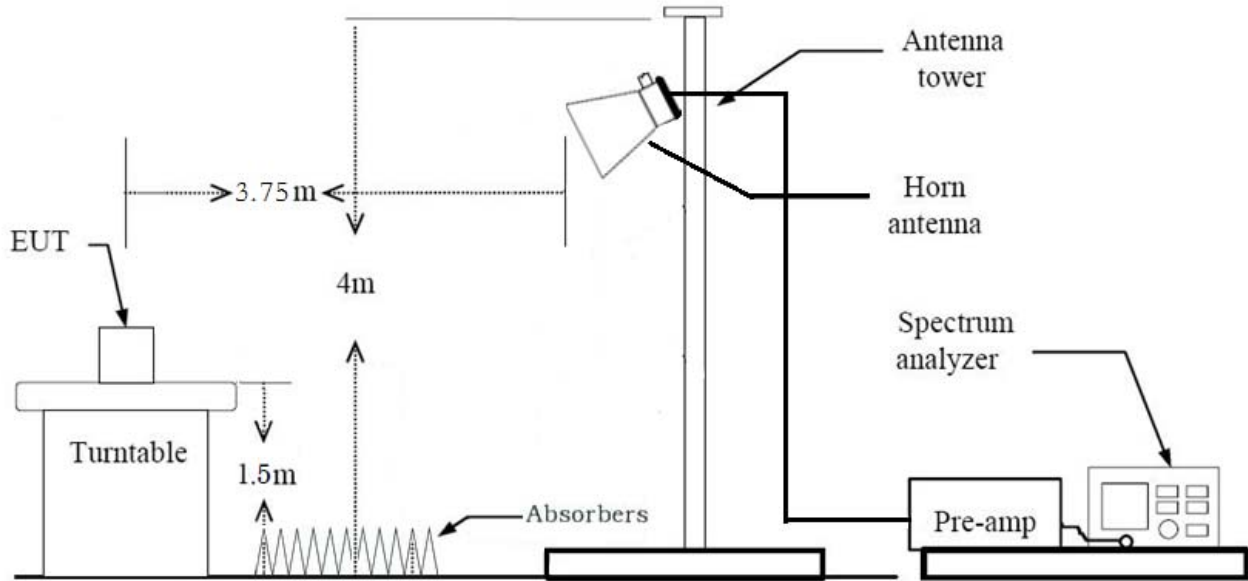

TEST PROCEDURE USED

Method 12.1 in KDB 558074 v04

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW \geq 3 x RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average (duty cycle \geq 98%)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

- Average (duty cycle < 98%, duty cycle variations are less than $\pm 2\%$)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS.

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method(RMS).
2. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
3. Distance extrapolation factor = $20 \log$ (test distance / specific distance) (dB)
4. The duty cycle factor for 802.11 b/g/n_HT20

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
b	1	8.627	8.718	98.96	0.045
g	6	1.432	1.527	93.78	0.279
n_HT20	MCS0_6.5 Mbps	1.340	1.446	92.65	0.332

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: 802.11 b_Normal Charging
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.27	1.45	V	52.72	73.98	21.26	PK
4824	43.40	1.45	V	44.85	53.98	9.13	AV
7236	45.71	11.43	V	57.14	73.98	16.84	PK
7236	33.45	11.43	V	44.88	53.98	9.10	AV
4824	50.78	1.45	H	52.23	73.98	21.75	PK
4824	42.40	1.45	H	43.85	53.98	10.13	AV
7236	45.42	11.43	H	56.85	73.98	17.13	PK
7236	33.42	11.43	H	44.85	53.98	9.13	AV

Operation Mode: 802.11 g_Normal Charging
 Transfer Rate: 6 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	48.62	0.00	1.45	V	50.07	73.98	23.91	PK
4824	36.83	0.28	1.45	V	38.56	53.98	15.42	AV
7236	45.28	0.00	11.43	V	56.71	73.98	17.27	PK
7236	33.29	0.28	11.43	V	45.00	53.98	8.98	AV
4824	46.72	0.00	1.45	H	48.17	73.98	25.81	PK
4824	36.71	0.28	1.45	H	38.44	53.98	15.54	AV
7236	45.18	0.00	11.43	H	56.61	73.98	17.37	PK
7236	33.16	0.28	11.43	H	44.87	53.98	9.11	AV

Operation Mode:	802.11 n_HT20_Normal Charging
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.46	0.00	1.45	V	50.91	73.98	23.07	PK
4824	36.74	0.33	1.45	V	38.52	53.98	15.46	AV
7236	45.40	0.00	11.43	V	56.83	73.98	17.15	PK
7236	33.25	0.33	11.43	V	45.01	53.98	8.97	AV
4824	46.67	0.00	1.45	H	48.12	73.98	25.86	PK
4824	36.68	0.33	1.45	H	38.46	53.98	15.52	AV
7236	44.56	0.00	11.43	H	55.99	73.98	17.99	PK
7236	33.11	0.33	11.43	H	44.87	53.98	9.11	AV

*A.F. : Antenna Factor / C.L. : Cable Loss / A.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Duty cycle factor applies only below 98%.
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor (802.11b)
6. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor + Duty Cycle Factor (802.11g/n)
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
8. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b_Normal Charging
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.41	1.66	V	54.07	73.98	19.91	PK
4874	45.16	1.66	V	46.82	53.98	7.16	AV
7311	45.90	10.10	V	56.00	73.98	17.98	PK
7311	33.67	10.10	V	43.77	53.98	10.21	AV
4874	51.45	1.66	H	53.11	73.98	20.87	PK
4874	44.14	1.66	H	45.80	53.98	8.18	AV
7311	44.89	10.10	H	54.99	73.98	18.99	PK
7311	33.63	10.10	H	43.73	53.98	10.25	AV

Operation Mode: 802.11 b_Fast Charging
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.62	1.66	V	53.28	73.98	20.70	PK
4874	45.10	1.66	V	46.76	53.98	7.22	AV

Operation Mode: 802.11 g_Normal Charging
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.74	0.00	1.66	V	51.40	73.98	22.58	PK
4874	37.83	0.28	1.66	V	39.77	53.98	14.21	AV
7311	45.62	0.00	10.10	V	55.72	73.98	18.26	PK
7311	33.65	0.28	10.10	V	44.03	53.98	9.95	AV
4874	47.61	0.00	1.66	H	49.27	73.98	24.71	PK
4874	37.80	0.28	1.66	H	39.74	53.98	14.24	AV
7311	44.73	0.00	10.10	H	54.83	73.98	19.15	PK
7311	33.59	0.28	10.10	H	43.97	53.98	10.01	AV

Operation Mode: 802.11 n_HT20_Normal Charging
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.61	0.00	1.66	V	50.27	73.98	23.71	PK
4874	37.77	0.33	1.66	V	39.76	53.98	14.22	AV
7311	45.37	0.00	10.10	V	55.47	73.98	18.51	PK
7311	33.62	0.33	10.10	V	44.05	53.98	9.93	AV
4874	48.33	0.00	1.66	H	49.99	73.98	23.99	PK
4874	37.67	0.33	1.66	H	39.66	53.98	14.32	AV
7311	44.94	0.00	10.10	H	55.04	73.98	18.94	PK
7311	33.52	0.33	10.10	H	43.95	53.98	10.03	AV

*A.F. : Antenna Factor / C.L. : Cable Loss / A.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Duty cycle factor applies only below 98%.
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor (802.11b)
6. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor + Duty Cycle Factor (802.11g/n)
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
8. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b_Normal Charging
 Transfer Rate: 1 Mbps
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.62	1.00	V	52.62	73.98	21.36	PK
4924	42.91	1.00	V	43.91	53.98	10.07	AV
7386	45.84	11.10	V	56.94	73.98	17.04	PK
7386	33.56	11.10	V	44.66	53.98	9.32	AV
4924	50.33	1.00	H	51.33	73.98	22.65	PK
4924	42.31	1.00	H	43.31	53.98	10.67	AV
7386	45.17	11.10	H	56.27	73.98	17.71	PK
7386	33.48	11.10	H	44.58	53.98	9.40	AV

Operation Mode: 802.11 g_Normal Charging
 Transfer Rate: 6 Mbps
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.92	0.00	1.00	V	50.92	73.98	23.06	PK
4924	37.43	0.28	1.00	V	38.71	53.98	15.27	AV
7386	45.62	0.00	11.10	V	56.72	73.98	17.26	PK
7386	33.54	0.28	11.10	V	44.92	53.98	9.06	AV
4924	49.63	0.00	1.00	H	50.63	73.98	23.35	PK
4924	37.38	0.28	1.00	H	38.66	53.98	15.32	AV
7386	45.33	0.00	11.10	H	56.43	73.98	17.55	PK
7386	33.47	0.28	11.10	H	44.85	53.98	9.13	AV

Operation Mode: 802.11 n_HT20_Normal Charging
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.16	0.00	1.00	V	51.16	73.98	22.82	PK
4924	37.48	0.33	1.00	V	38.81	53.98	15.17	AV
7386	46.36	0.00	11.10	V	57.46	73.98	16.52	PK
7386	33.48	0.33	11.10	V	44.91	53.98	9.07	AV
4924	49.35	0.00	1.00	H	50.35	73.98	23.63	PK
4924	37.35	0.33	1.00	H	38.68	53.98	15.30	AV
7386	45.27	0.00	11.10	H	56.37	73.98	17.61	PK
7386	33.41	0.33	11.10	H	44.84	53.98	9.14	AV

*A.F. : Antenna Factor / C.L. : Cable Loss / A.G. : Amplifier Gain / D.F. : Distance Factor

Notes:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Duty cycle factor applies only below 98%.
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor (802.11b)
6. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor + Duty Cycle Factor (802.11g/n)
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
8. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

■ **RESULT PLOTS_Normal Charging (Worst case :Y-V)**
Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 2nd Harmonic)

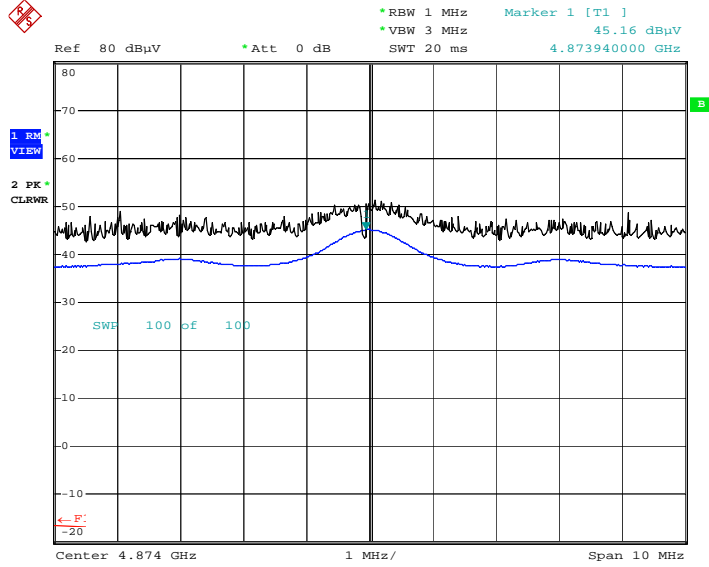

Date: 18.APR.2018 11:13:36

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 2nd Harmonic)

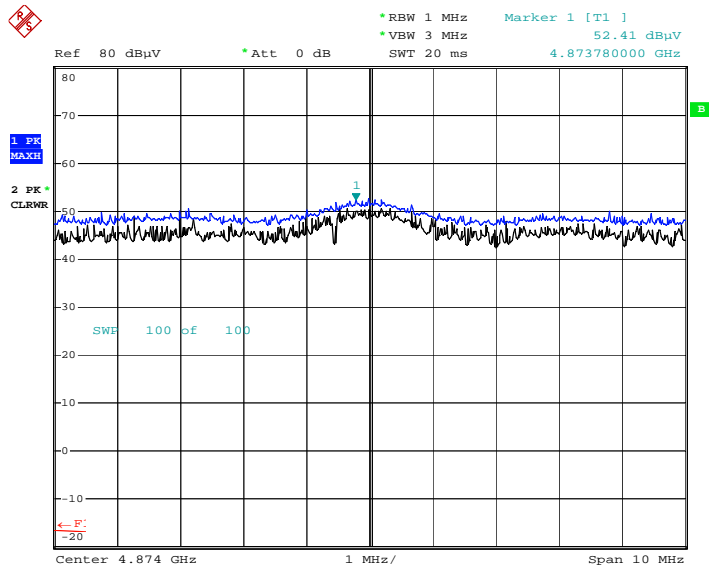

Date: 18.APR.2018 11:14:01

Note : Only the worst case plots for Radiated Spurious Emissions.

10.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Operation Mode: 802.11b_Normal charging
 Transfer Rate: 1 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.46	1.14	H	52.60	73.98	21.38	PK
2390.0	39.38	1.14	H	40.52	53.98	13.46	AV
2390.0	51.11	1.14	V	52.25	73.98	21.73	PK
2390.0	39.29	1.14	V	40.43	53.98	13.55	AV
2483.5	58.06	0.78	H	58.84	73.98	15.14	PK
2483.5	40.87	0.78	H	41.65	53.98	12.33	AV
2483.5	57.81	0.78	V	58.59	73.98	15.39	PK
2483.5	40.24	0.78	V	41.02	53.98	12.96	AV

*A.F. : Antenna Factor / C.L. : Cable Loss / A.G. : Amplifier Gain / D.F. : Distance Factor

Operation Mode: 802.11g_Normal Charging
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	* A.F.+C.L- A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	57.53	0.00	1.14	H	58.67	73.98	15.31	PK
2390.0	44.50	0.28	1.14	H	45.92	53.98	8.06	AV
2390.0	55.68	0.00	1.14	V	56.82	73.98	17.16	PK
2390.0	42.78	0.28	1.14	V	44.20	53.98	9.78	AV
2483.5	59.09	0.00	0.78	H	59.87	73.98	14.11	PK
2483.5	47.66	0.28	0.78	H	48.72	53.98	5.26	AV
2483.5	57.72	0.00	0.78	V	58.50	73.98	15.48	PK
2483.5	45.13	0.28	0.78	V	46.19	53.98	7.79	AV

Operation Mode: 802.11g_Fast Charging
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462 MHz
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	* A.F.+C.L- A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	57.74	0.28	0.78	H	58.52	73.98	15.46	PK
2483.5	45.44	0.28	0.78	H	46.50	53.98	7.48	AV

Operation Mode: 802.11n_Normal Charging
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.47	0.00	1.14	H	57.61	73.98	16.37	PK
2390.0	44.01	0.33	1.14	H	45.48	53.98	8.50	AV
2390.0	55.48	0.00	1.14	V	56.62	73.98	17.36	PK
2390.0	43.16	0.33	1.14	V	44.63	53.98	9.35	AV
2483.5	58.50	0.00	0.78	H	59.28	73.98	14.70	PK
2483.5	46.75	0.33	0.78	H	47.86	53.98	6.12	AV
2483.5	57.74	0.00	0.78	V	58.52	73.98	15.46	PK
2483.5	45.67	0.33	0.78	V	46.78	53.98	7.20	AV

Notes:

- Duty cycle factor applies only below 98%.
- Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor(802.11b)
- Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor + Duty Cycle Factor (802.11g/n)
- Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
- We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ RESULT PLOTS_Normal Charging (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

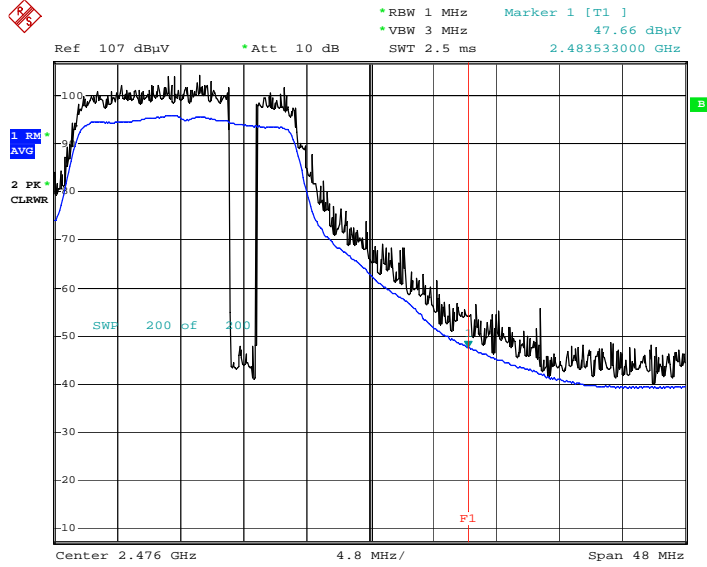

Date: 18.APR.2018 10:38:20

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

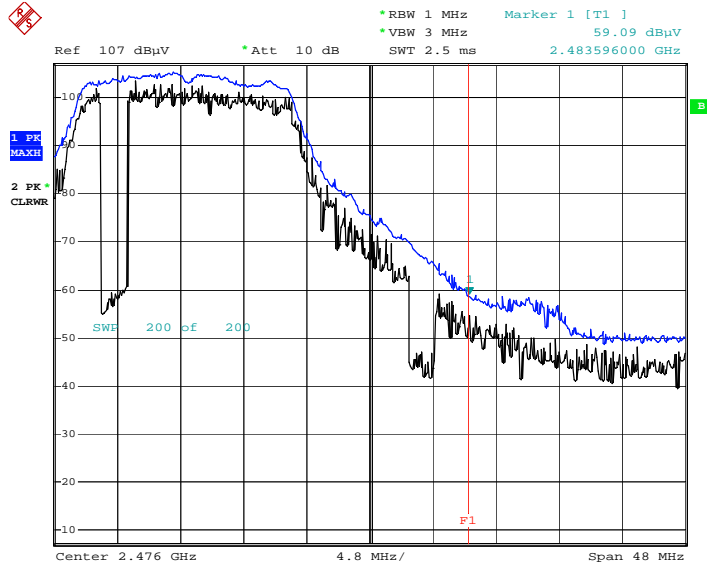

Date: 18.APR.2018 10:39:13

Note : Only the worst case plots for Radiated Restricted Band Edges.

10.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for worst data rate, channel, operation mode.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

RESULT PLOTS_Normal Charging

Conducted Emissions (Line 1)

EMI Auto Test(20)


1 / 2

HCT TEST Report

Common Information

EUT: SM-G8750
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 2.4G MODE

FCC CLASS B_Exten Cable

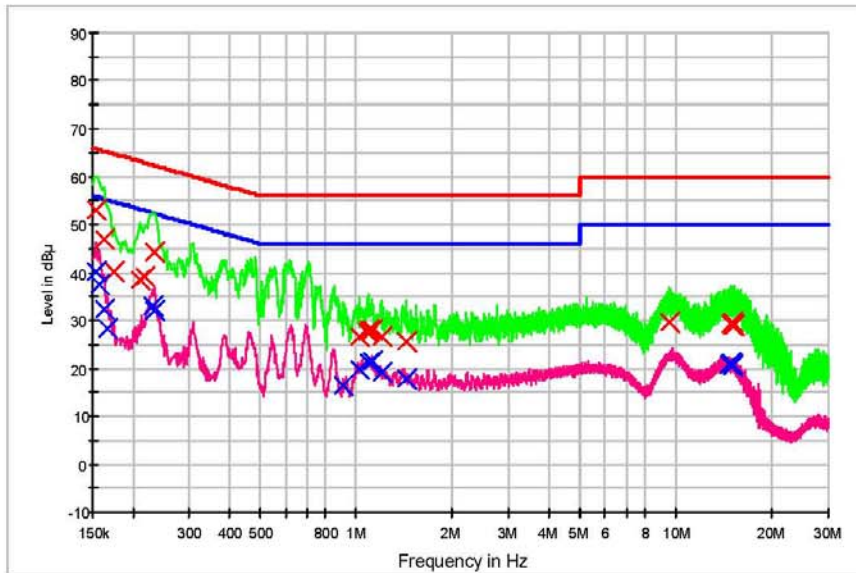

— FCC CLASS B_OP
 — FCC CLASS B_AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 X Final Result 1-OPK
 X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	53.2	9.000	Off	N	9.7	12.6	65.8
0.162000	47.0	9.000	Off	N	9.7	18.4	65.4
0.174000	40.0	9.000	Off	N	9.7	24.8	64.8
0.210000	38.3	9.000	Off	N	9.7	24.9	63.2
0.218000	39.2	9.000	Off	N	9.7	23.7	62.9
0.234000	44.4	9.000	Off	N	9.7	17.9	62.3
1.022000	26.7	9.000	Off	N	9.8	29.3	56.0
1.088000	27.6	9.000	Off	N	9.8	28.4	56.0
1.094000	27.9	9.000	Off	N	9.8	28.1	56.0
1.118000	28.1	9.000	Off	N	9.8	27.9	56.0
1.200000	26.7	9.000	Off	N	9.8	29.3	56.0
1.432000	25.7	9.000	Off	N	9.8	30.3	56.0
9.494000	29.7	9.000	Off	N	10.2	30.3	60.0
14.858000	29.4	9.000	Off	N	10.5	30.6	60.0
14.920000	29.4	9.000	Off	N	10.5	30.6	60.0
15.036000	28.9	9.000	Off	N	10.5	31.1	60.0
15.074000	29.6	9.000	Off	N	10.5	30.4	60.0
15.304000	28.9	9.000	Off	N	10.5	31.1	60.0

EMI Auto Test(20)

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	40.2	9.000	Off	N	9.7	15.6	55.8
0.158000	37.6	9.000	Off	N	9.7	18.0	55.6
0.162000	32.3	9.000	Off	N	9.7	23.0	55.4
0.166000	28.2	9.000	Off	N	9.7	26.9	55.2
0.230000	33.1	9.000	Off	N	9.7	19.4	52.4
0.234000	32.0	9.000	Off	N	9.7	20.3	52.3
0.910000	16.3	9.000	Off	N	9.8	29.7	46.0
1.022000	19.8	9.000	Off	N	9.8	26.2	46.0
1.094000	21.2	9.000	Off	N	9.8	24.8	46.0
1.116000	21.6	9.000	Off	N	9.8	24.4	46.0
1.200000	19.1	9.000	Off	N	9.8	26.9	46.0
1.432000	17.9	9.000	Off	N	9.8	28.1	46.0
14.766000	21.0	9.000	Off	N	10.5	29.0	50.0
14.874000	21.0	9.000	Off	N	10.5	29.0	50.0
14.920000	21.1	9.000	Off	N	10.5	28.9	50.0
15.002000	20.9	9.000	Off	N	10.5	29.1	50.0
15.010000	21.0	9.000	Off	N	10.5	29.0	50.0
15.036000	20.6	9.000	Off	N	10.5	29.4	50.0

2018-04-04

오후 3:09:23

Conducted Emissions (Line 2)

EMI Auto Test(20)


1 / 2

HCT TEST Report

Common Information

EUT: SM-G8750
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 2.4G MODE

FCC CLASS B_Exten Cable

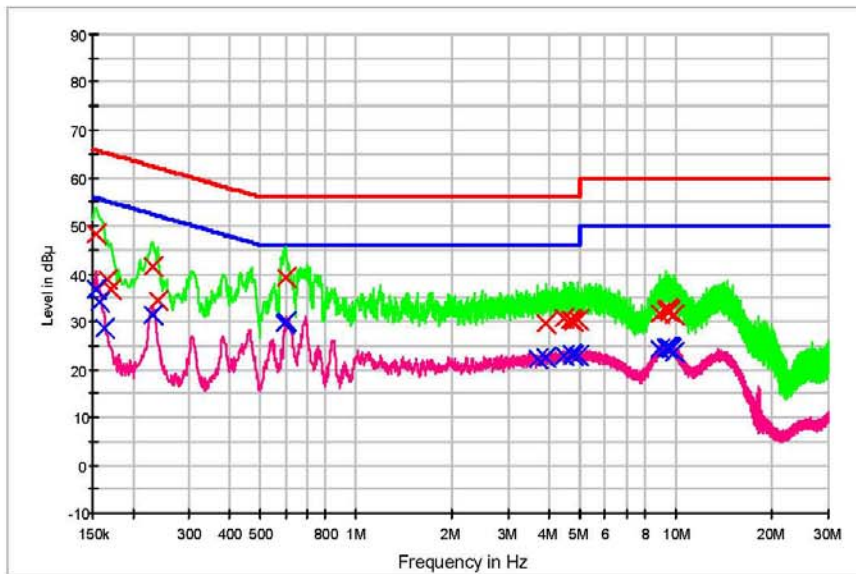

— FCC CLASS B_OP
— Preview Result 2-AVG
— FCC CLASS B_AV
X Final Result 1-QPK
— Preview Result 1-PK+
X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	48.3	9.000	Off	L1	9.7	17.4	65.8
0.166000	38.8	9.000	Off	L1	9.7	26.4	65.2
0.170000	36.7	9.000	Off	L1	9.7	28.2	65.0
0.230000	41.4	9.000	Off	L1	9.7	21.1	62.4
0.240000	34.4	9.000	Off	L1	9.7	27.7	62.1
0.602000	39.2	9.000	Off	L1	9.7	16.8	56.0
3.922000	29.6	9.000	Off	L1	9.9	26.4	56.0
4.450000	30.6	9.000	Off	L1	10.0	25.4	56.0
4.686000	30.3	9.000	Off	L1	10.0	25.7	56.0
4.716000	30.3	9.000	Off	L1	10.0	25.7	56.0
4.782000	30.2	9.000	Off	L1	10.0	25.8	56.0
4.980000	30.3	9.000	Off	L1	10.0	25.7	56.0
8.874000	31.7	9.000	Off	L1	10.1	28.3	60.0
9.344000	32.4	9.000	Off	L1	10.1	27.6	60.0
9.420000	32.6	9.000	Off	L1	10.1	27.4	60.0
9.502000	32.5	9.000	Off	L1	10.1	27.5	60.0
9.562000	32.2	9.000	Off	L1	10.1	27.8	60.0
9.858000	31.3	9.000	Off	L1	10.2	28.7	60.0

2018-04-04

오후 3:20:00

EMI Auto Test(20)

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	36.8	9.000	Off	L1	9.7	19.0	55.8
0.158000	34.0	9.000	Off	L1	9.7	21.6	55.6
0.162000	28.6	9.000	Off	L1	9.7	26.8	55.4
0.230000	31.3	9.000	Off	L1	9.7	21.1	52.4
0.598000	29.8	9.000	Off	L1	9.7	16.2	46.0
0.602000	30.0	9.000	Off	L1	9.7	16.0	46.0
3.706000	22.3	9.000	Off	L1	9.9	23.7	46.0
3.922000	22.5	9.000	Off	L1	9.9	23.5	46.0
4.450000	22.8	9.000	Off	L1	10.0	23.2	46.0
4.716000	23.1	9.000	Off	L1	10.0	22.9	46.0
4.782000	23.0	9.000	Off	L1	10.0	23.0	46.0
4.980000	23.0	9.000	Off	L1	10.0	23.0	46.0
8.874000	24.4	9.000	Off	L1	10.1	25.6	50.0
9.344000	24.7	9.000	Off	L1	10.1	25.3	50.0
9.452000	24.6	9.000	Off	L1	10.1	25.4	50.0
9.502000	24.5	9.000	Off	L1	10.1	25.5	50.0
9.648000	24.1	9.000	Off	L1	10.1	25.9	50.0
9.858000	23.5	9.000	Off	L1	10.2	26.5	50.0

2018-04-04

오후 3:20:00

RESULT PLOTS_Fast Charging

Conducted Emissions (Line 1)

EMI Auto Test(21)


1 / 2

HCT TEST Report

Common Information

EUT: SM-G8750
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 2.4G MODE (FAST CHARGING)

FCC CLASS B_Exten Cable

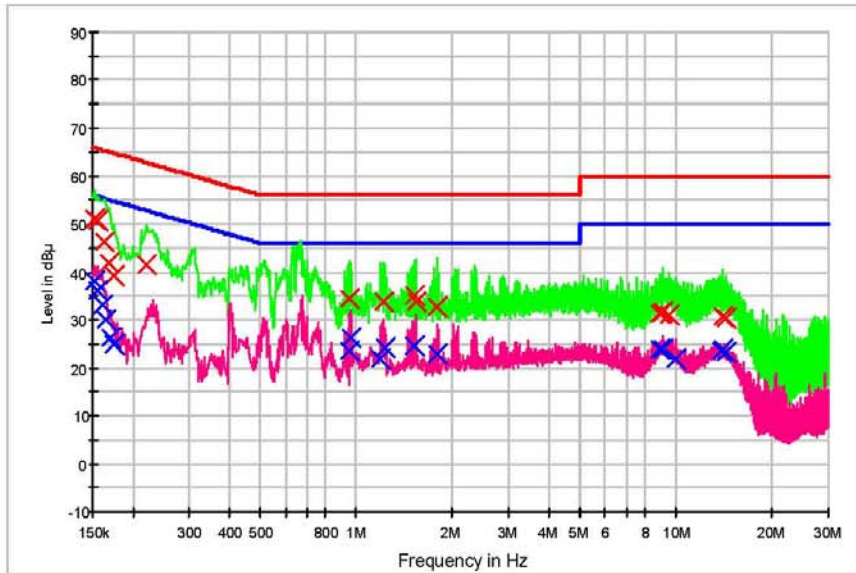

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	51.0	9.000	Off	N	9.7	14.9	65.9
0.156000	50.5	9.000	Off	N	9.7	15.2	65.7
0.162000	46.2	9.000	Off	N	9.7	19.1	65.4
0.168000	41.9	9.000	Off	N	9.7	23.1	65.1
0.174000	39.1	9.000	Off	N	9.7	25.7	64.8
0.220000	41.5	9.000	Off	N	9.7	21.3	62.8
0.948000	34.3	9.000	Off	N	9.8	21.7	56.0
1.222000	33.8	9.000	Off	N	9.8	22.2	56.0
1.526000	35.0	9.000	Off	N	9.8	21.0	56.0
1.536000	33.6	9.000	Off	N	9.8	22.4	56.0
1.782000	32.7	9.000	Off	N	9.8	23.3	56.0
1.786000	32.8	9.000	Off	N	9.8	23.2	56.0
8.920000	31.3	9.000	Off	N	10.2	28.7	60.0
9.032000	31.3	9.000	Off	N	10.2	28.7	60.0
9.056000	31.6	9.000	Off	N	10.2	28.4	60.0
9.588000	31.1	9.000	Off	N	10.2	28.9	60.0
14.038000	30.8	9.000	Off	N	10.4	29.2	60.0
14.436000	30.3	9.000	Off	N	10.4	29.7	60.0

EMI Auto Test(21)

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152000	38.1	9.000	Off	N	9.7	17.8	55.9
0.156000	36.2	9.000	Off	N	9.7	19.5	55.7
0.160000	33.2	9.000	Off	N	9.7	22.3	55.5
0.164000	29.9	9.000	Off	N	9.7	25.4	55.3
0.170000	26.3	9.000	Off	N	9.7	28.6	55.0
0.174000	24.9	9.000	Off	N	9.7	29.8	54.8
0.948000	23.4	9.000	Off	N	9.8	22.6	46.0
0.964000	26.3	9.000	Off	N	9.8	19.7	46.0
1.188000	22.0	9.000	Off	N	9.8	24.0	46.0
1.226000	24.1	9.000	Off	N	9.8	21.9	46.0
1.526000	24.6	9.000	Off	N	9.8	21.4	46.0
1.782000	23.0	9.000	Off	N	9.8	23.0	46.0
8.920000	23.8	9.000	Off	N	10.2	26.2	50.0
9.056000	23.9	9.000	Off	N	10.2	26.1	50.0
10.050000	21.7	9.000	Off	N	10.3	28.3	50.0
13.864000	23.6	9.000	Off	N	10.4	26.4	50.0
14.108000	23.8	9.000	Off	N	10.4	26.2	50.0
14.396000	23.2	9.000	Off	N	10.4	26.8	50.0

2018-04-13

오후 3:41:13

Conducted Emissions (Line 2)

EMI Auto Test(21)


1 / 2

HCT TEST Report

Common Information

EUT: SM-G8750
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 2.4G MODE (FAST CHARGING)

FCC CLASS B_Exten Cable

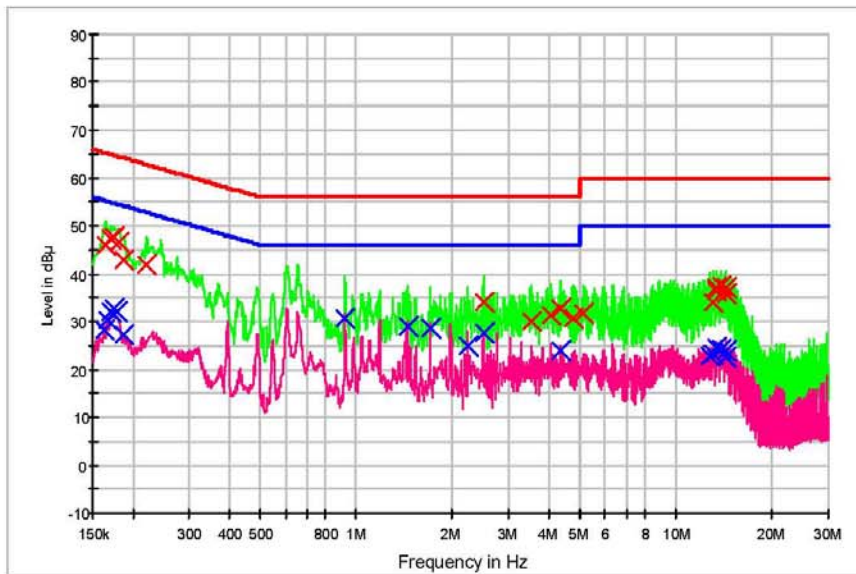

— FCC CLASS B_OP
 — FCC CLASS B_AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 X Final Result 1-QPK
 X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.164000	46.0	9.000	Off	L1	9.7	19.3	65.3
0.170000	47.4	9.000	Off	L1	9.7	17.5	65.0
0.174000	47.5	9.000	Off	L1	9.7	17.2	64.8
0.180000	46.7	9.000	Off	L1	9.7	17.7	64.5
0.188000	42.9	9.000	Off	L1	9.7	21.2	64.1
0.220000	42.0	9.000	Off	L1	9.7	20.8	62.8
2.502000	34.1	9.000	Off	L1	9.9	21.9	56.0
3.544000	29.9	9.000	Off	L1	9.9	26.1	56.0
4.078000	31.5	9.000	Off	L1	9.9	24.5	56.0
4.342000	32.7	9.000	Off	L1	9.9	23.3	56.0
4.768000	30.8	9.000	Off	L1	10.0	25.2	56.0
5.134000	31.7	9.000	Off	L1	10.0	28.3	60.0
13.084000	33.9	9.000	Off	L1	10.2	26.1	60.0
13.388000	37.1	9.000	Off	L1	10.2	22.9	60.0
13.448000	36.5	9.000	Off	L1	10.2	23.5	60.0
13.816000	37.3	9.000	Off	L1	10.2	22.7	60.0
14.306000	37.1	9.000	Off	L1	10.2	22.9	60.0
14.366000	35.6	9.000	Off	L1	10.2	24.4	60.0

2018-04-13

오후 4:05:39

EMI Auto Test(21)

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162000	28.2	9.000	Off	L1	9.7	27.1	55.4
0.166000	30.4	9.000	Off	L1	9.7	24.7	55.2
0.170000	32.2	9.000	Off	L1	9.7	22.8	55.0
0.174000	32.9	9.000	Off	L1	9.7	21.9	54.8
0.178000	32.0	9.000	Off	L1	9.7	22.5	54.6
0.188000	27.3	9.000	Off	L1	9.7	26.9	54.1
0.922000	30.7	9.000	Off	L1	9.8	15.3	46.0
1.446000	28.8	9.000	Off	L1	9.8	17.2	46.0
1.712000	28.8	9.000	Off	L1	9.8	17.2	46.0
2.234000	24.8	9.000	Off	L1	9.8	21.2	46.0
2.502000	27.5	9.000	Off	L1	9.9	18.5	46.0
4.344000	23.9	9.000	Off	L1	9.9	22.1	46.0
12.720000	22.9	9.000	Off	L1	10.2	27.1	50.0
13.084000	23.2	9.000	Off	L1	10.2	26.8	50.0
13.446000	24.6	9.000	Off	L1	10.2	25.4	50.0
13.870000	24.2	9.000	Off	L1	10.2	25.8	50.0
14.306000	23.7	9.000	Off	L1	10.2	26.3	50.0
14.366000	22.6	9.000	Off	L1	10.2	27.4	50.0

2018-04-13

오후 4:05:39

11. LIST OF TEST EQUIPMENT

11.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/20/2017	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2017	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/13/2017	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/22/2017	Annual	MY49431210
Agilent	* N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	* N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2017	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/12/2017	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/30/2017	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2017	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

* [Note]_ Test date using a Power Meter and Power Sensor : April 02, 2018 ~ April 15, 2018

* Previous Calibration Date : : April 17, 2017

11.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640 /800-XP-ET / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/06/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/06/2017	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/27/2017	Annual	101068-SZ
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/12/2017	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/15/2017	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/30/2017	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2018	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/12/2017	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/19/2017	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/11/2017	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/11/2017	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/30/2017	Annual	25956