## 6.4 Band Edge Emissions at Antenna Terminal

**§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(m)**

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is 43 + $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.***

***The minimum permissible attenuation level for Band 41 is > 43 + $10log_{10}$ (P[Watts]) at channel edges and > 55 + $10log_{10}$ (P[Watts]) at 5.5 MHz away and beyond channel edges.***

### Test Procedure Used

KDB 971168 v02r02 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1% of the emission bandwidth
4. VBW ≥ 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-3. Test Instrument & Measurement Setup**

### Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.




**Plot 6-96. Lower Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)**


**Plot 6-97. Lower Extended Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)**


**Plot 6-98. Upper Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)**


**Plot 6-99. Upper Extended Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)**

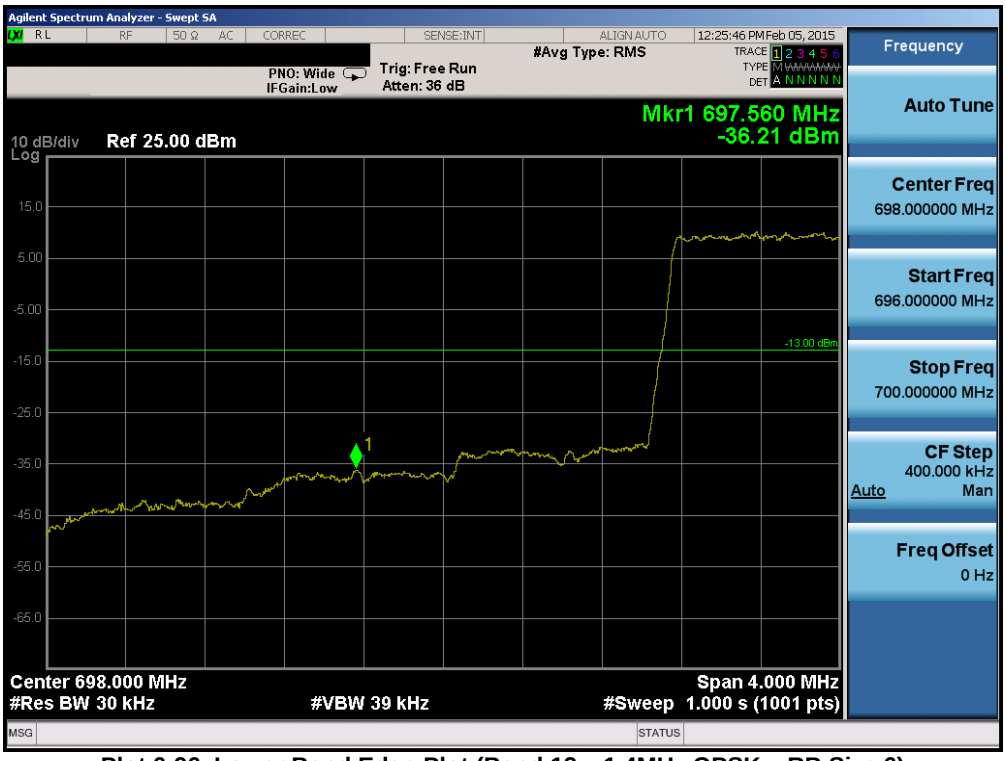


**Plot 6-100. Lower Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)**


**Plot 6-101. Lower Extended Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)**


**Plot 6-102. Upper Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)**


**Plot 6-103. Upper Extended Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)**

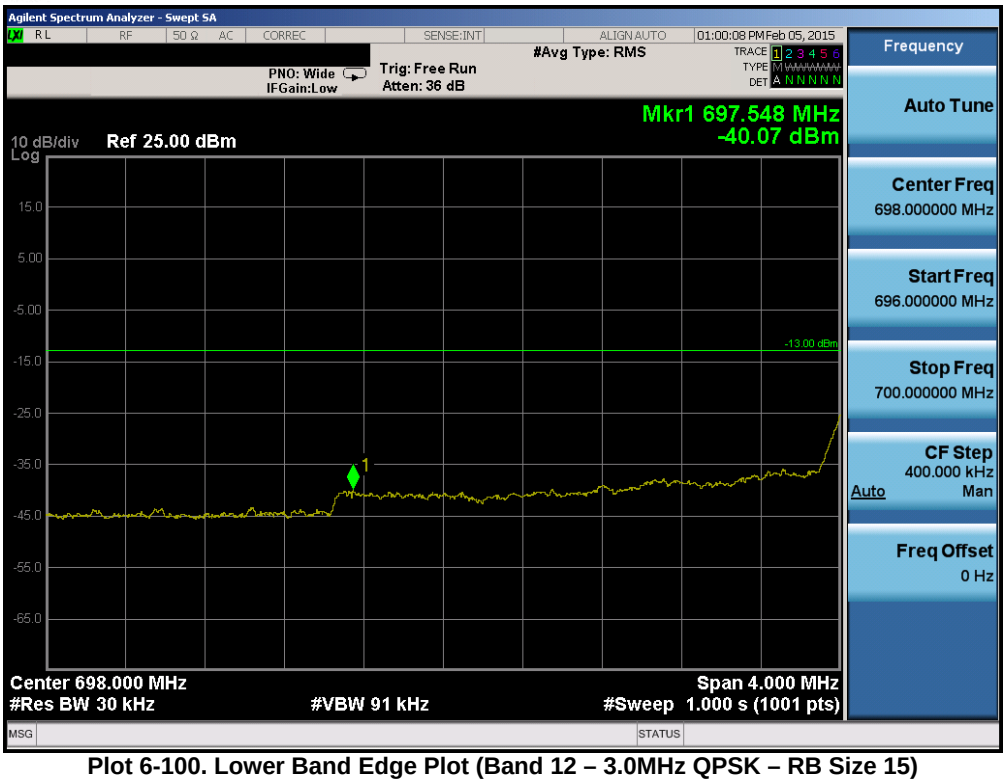


**Plot 6-104. Lower Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)**




**Plot 6-105. Lower Extended Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)**


**Plot 6-106. Upper Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)**

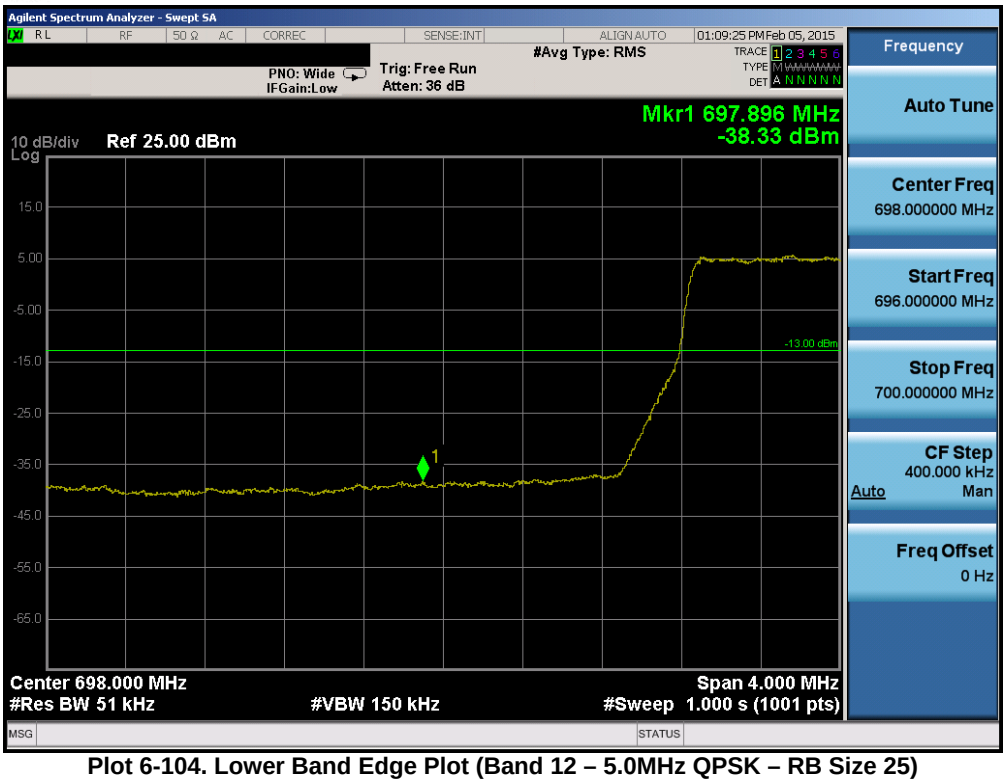
**Plot 6-107. Upper Extended Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)**


**Plot 6-108. Lower Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)**

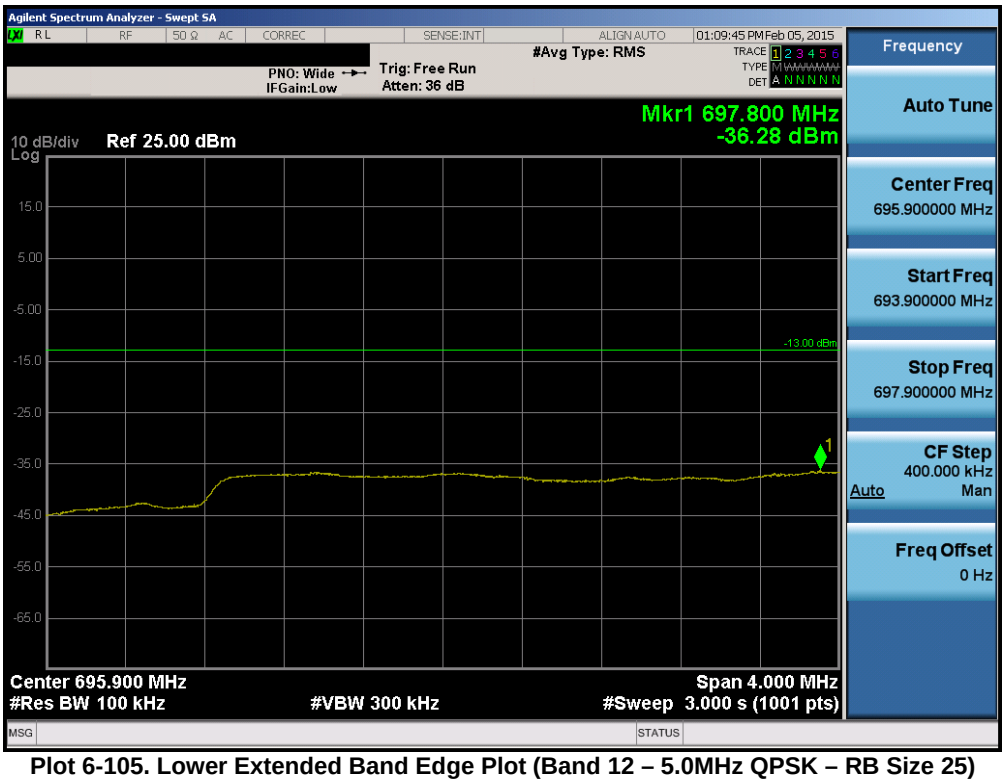
**Plot 6-109. Upper Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)**




**Plot 6-110. Lower Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)**


**Plot 6-111. Lower Extended Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)**




**Plot 6-112. Upper Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)**

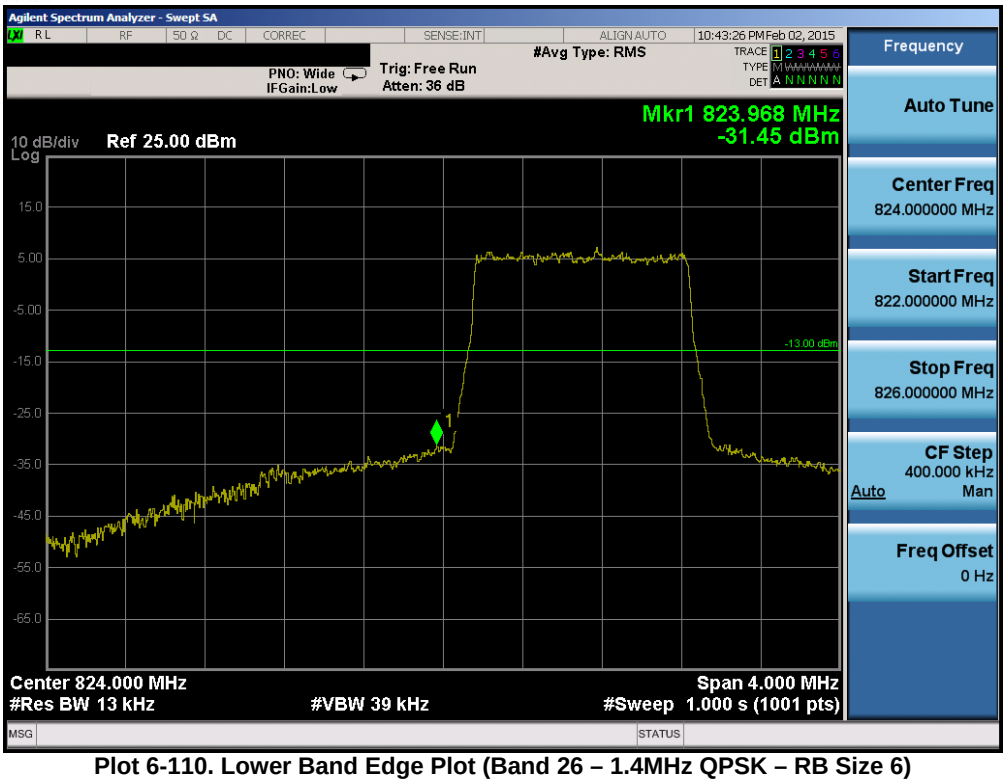
**Plot 6-113. Upper Extended Band Edge Plot (Band 26 – 1.4MHz QPSK – RB Size 6)**




**Plot 6-114. Lower Band Edge Plot (Band 26 – 3.0MHz QPSK – RB Size 15)**

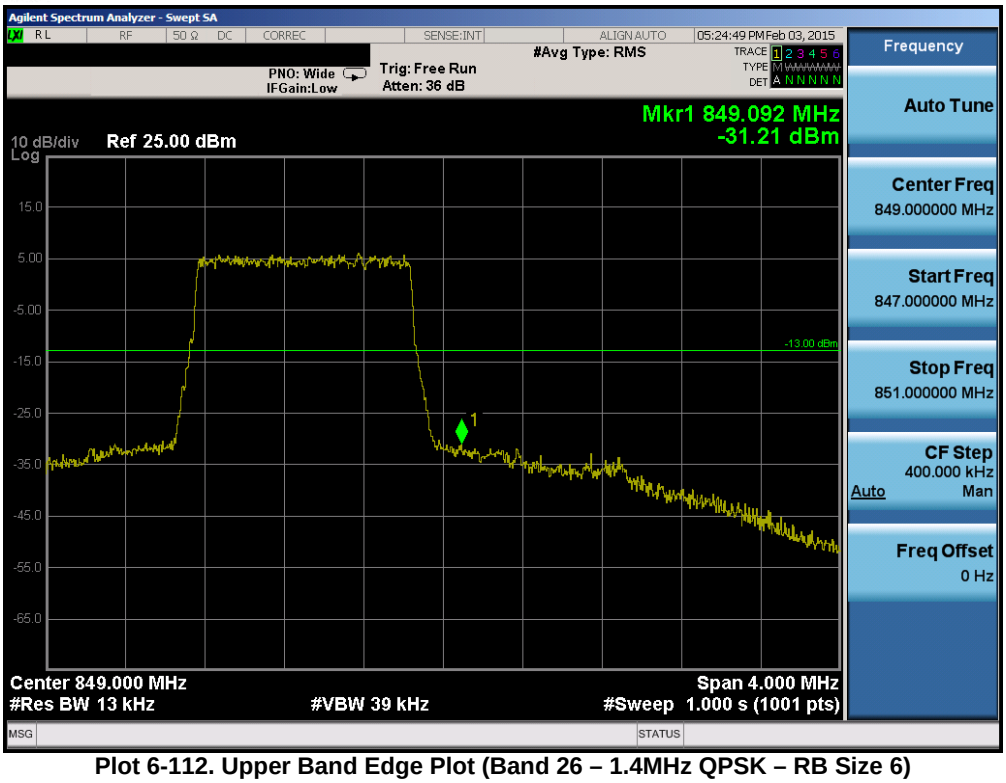
**Plot 6-115. Lower Extended Band Edge Plot (Band 26 – 3.0MHz QPSK – RB Size 15)**




**Plot 6-116. Upper Band Edge Plot (Band 26 – 3.0MHz QPSK – RB Size 15)**

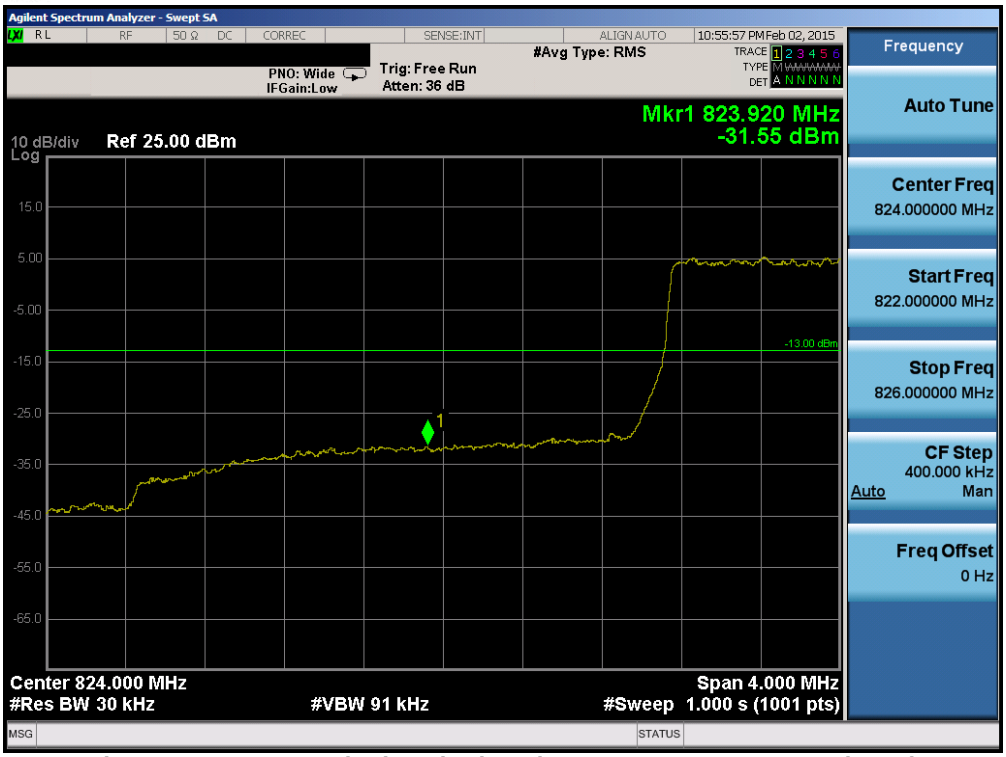
**Plot 6-117. Upper Extended Band Edge Plot (Band 26 – Band 5 – 3.0MHz QPSK – RB Size 15)**




**Plot 6-118. Lower Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)**

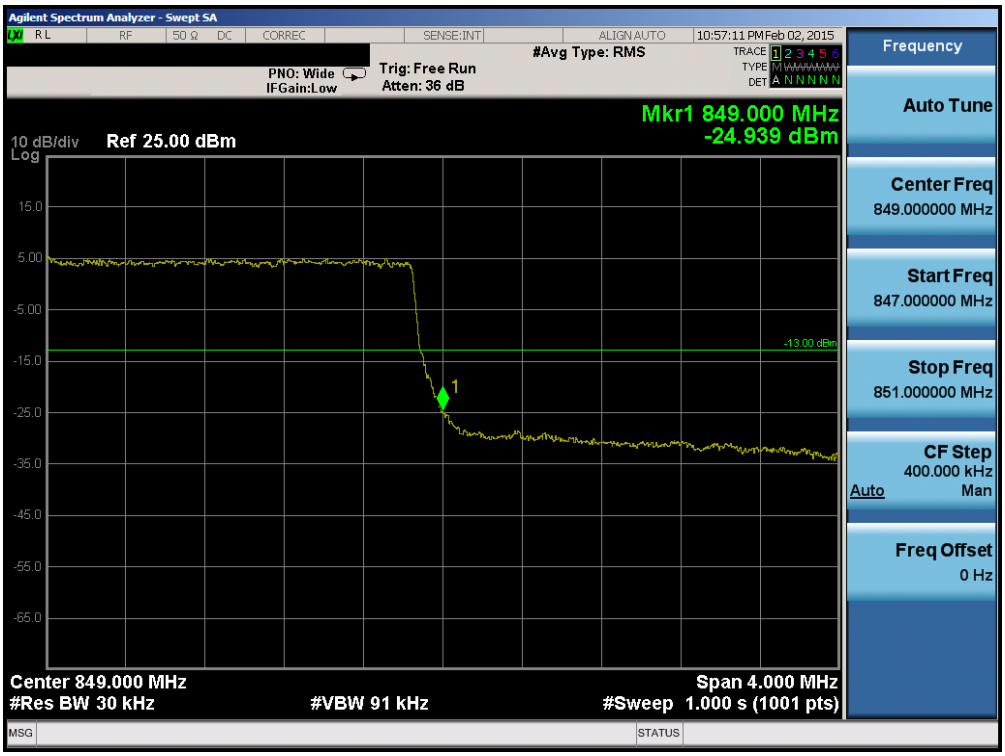
**Plot 6-119. Lower Extended Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)**




**Plot 6-120. Upper Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)**

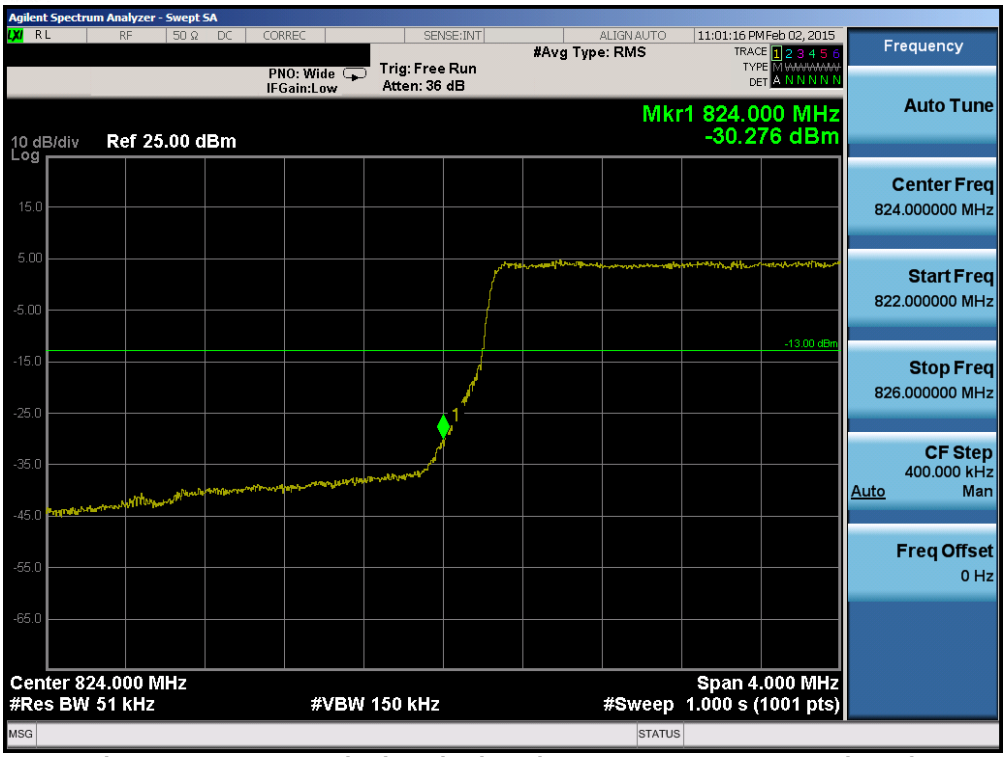
**Plot 6-121. Upper Extended Band Edge Plot (Band 26 – 5.0MHz QPSK – RB Size 25)**




**Plot 6-122. Lower Band Edge Plot (Band 26 – 10.0MHz QPSK – RB Size 50)**

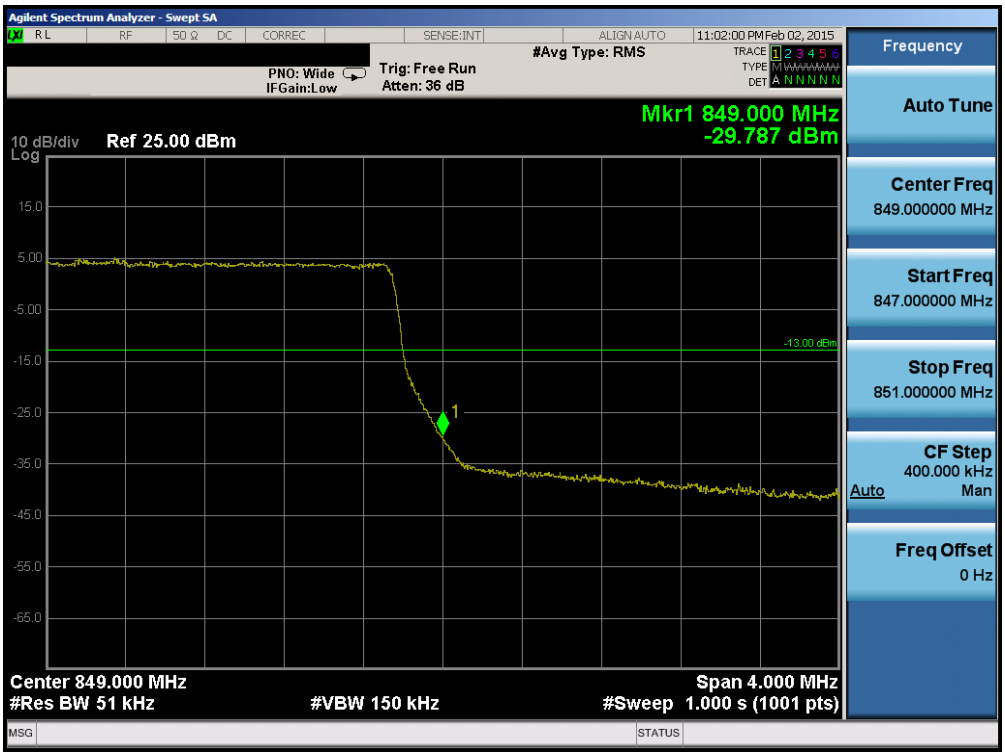


**Plot 6-123. Upper Band Edge Plot (Band 26 – 10.0MHz QPSK – RB Size 50)**

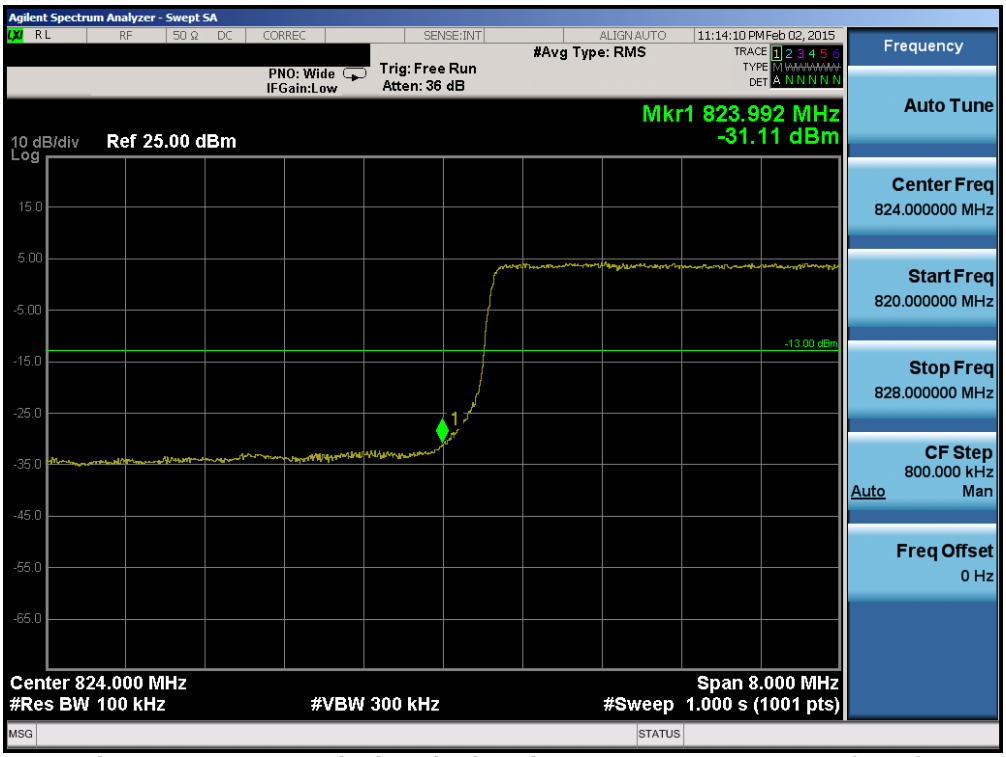


**Plot 6-124. Lower Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)**

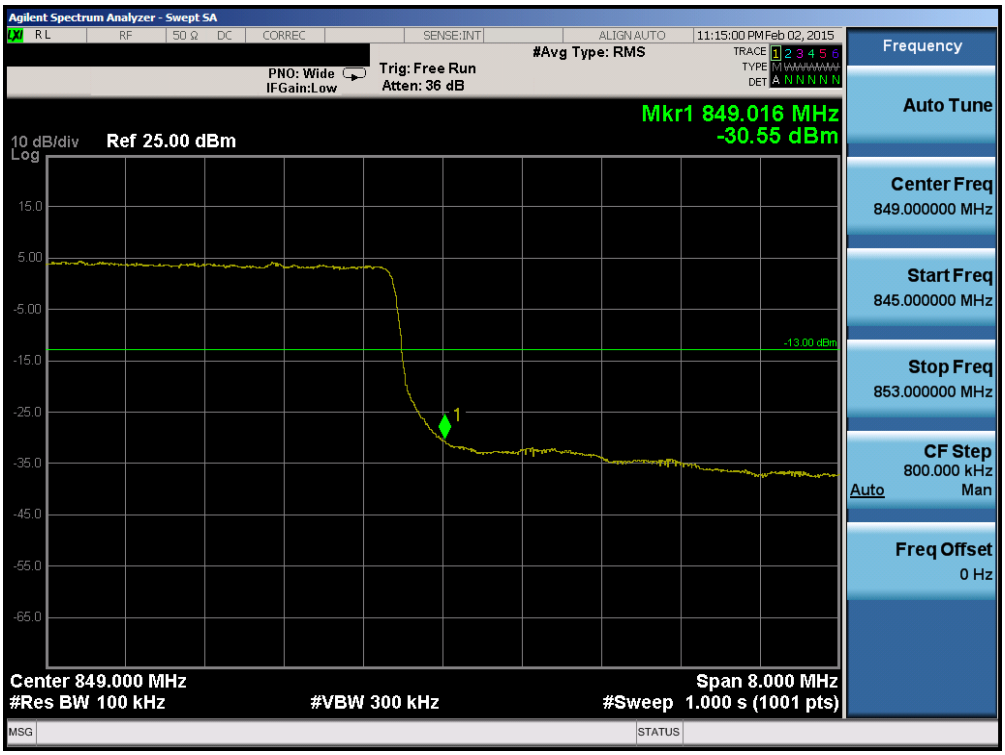


**Plot 6-125. Lower Extended Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)**


**Plot 6-126. Upper Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)**

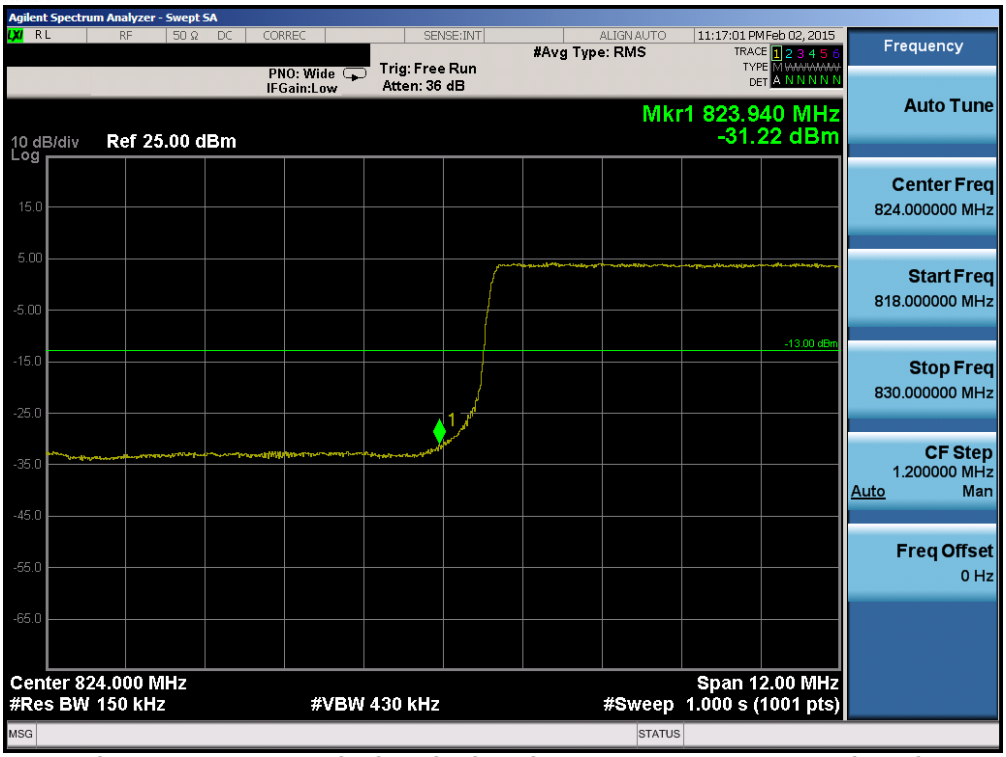
**Plot 6-127. Upper Extended Band Edge Plot (Band 26 – 15.0MHz QPSK – RB Size 75)**

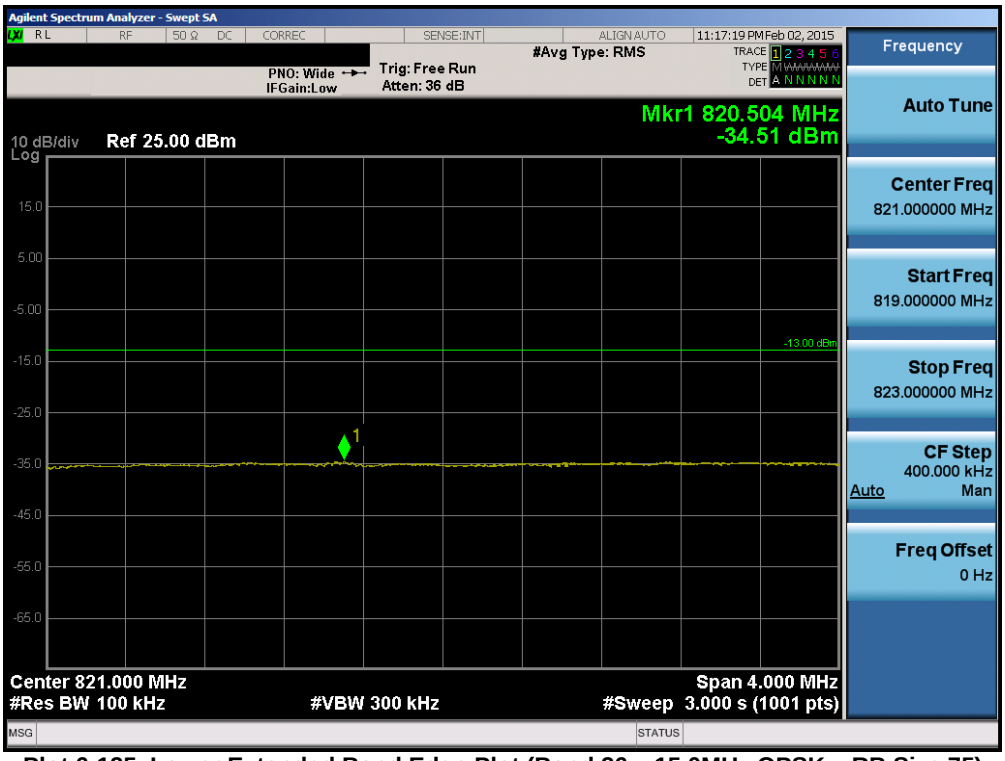


**Plot 6-128. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)**




**Plot 6-129. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)**

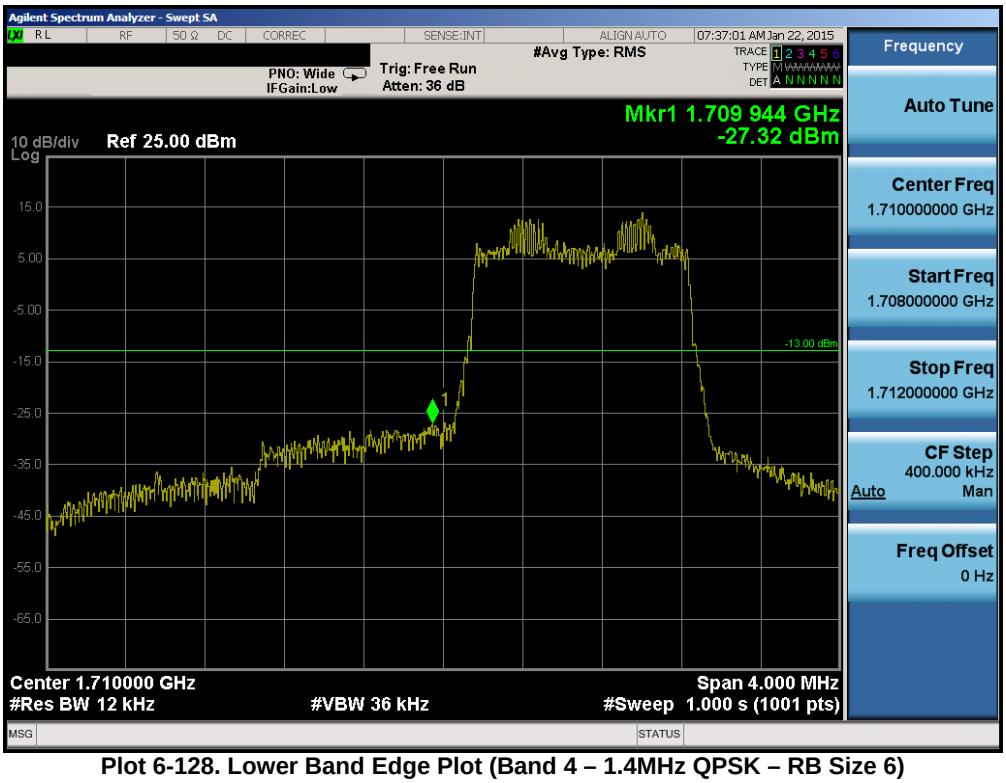


**Plot 6-130. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)**

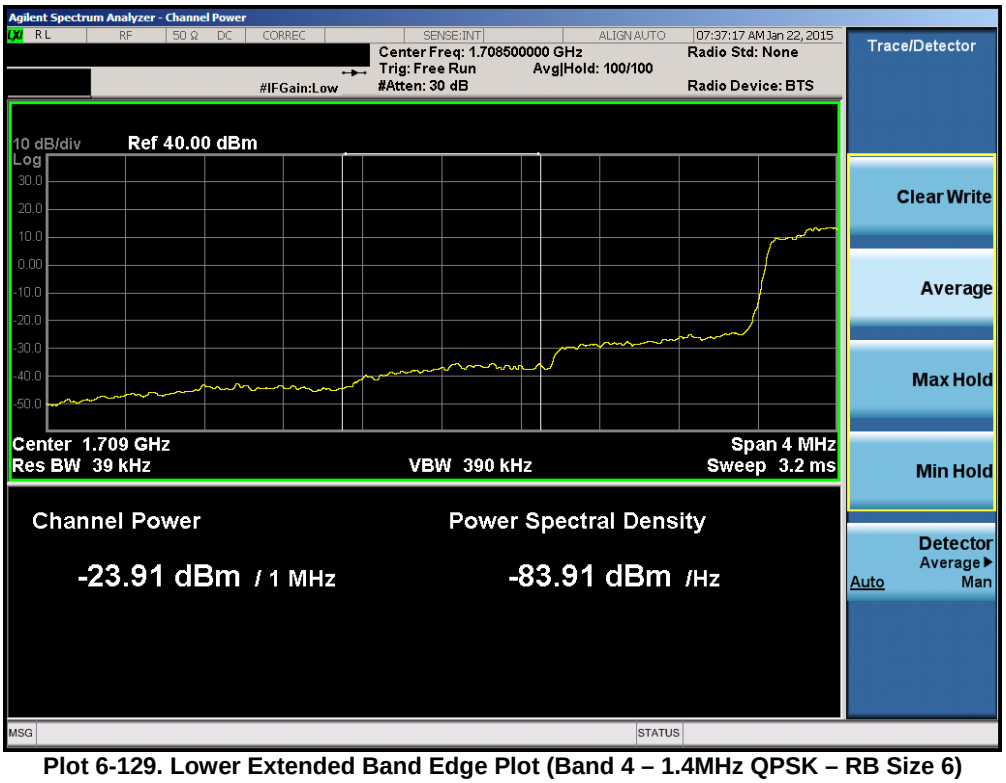


**Plot 6-131. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)**

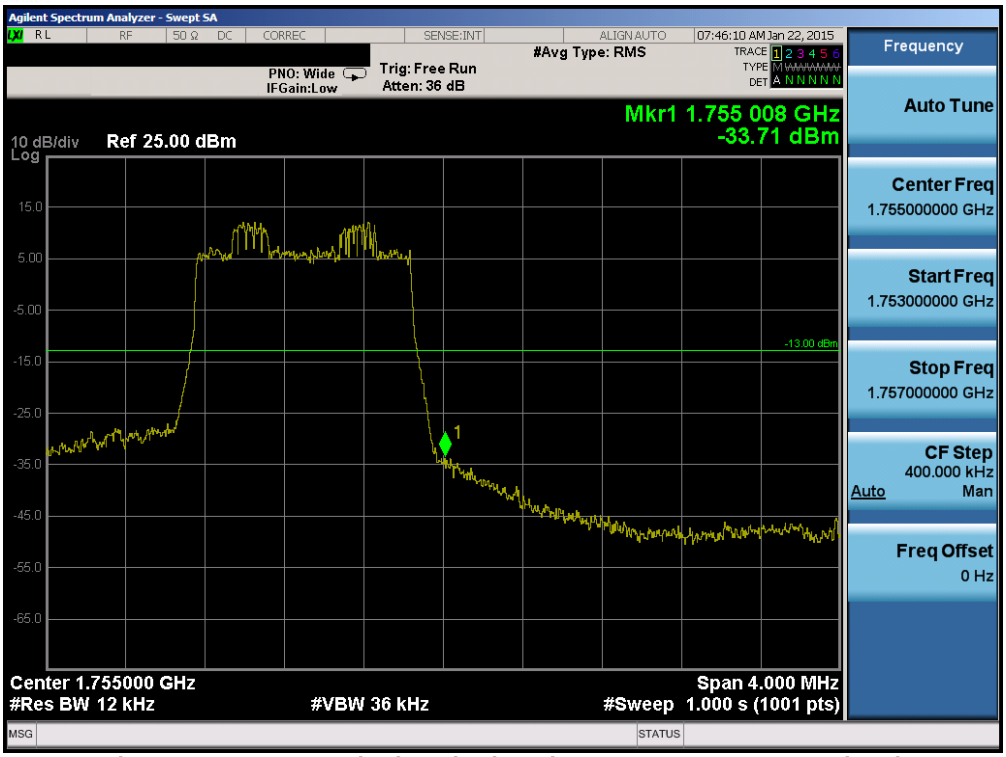


**Plot 6-132. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)**

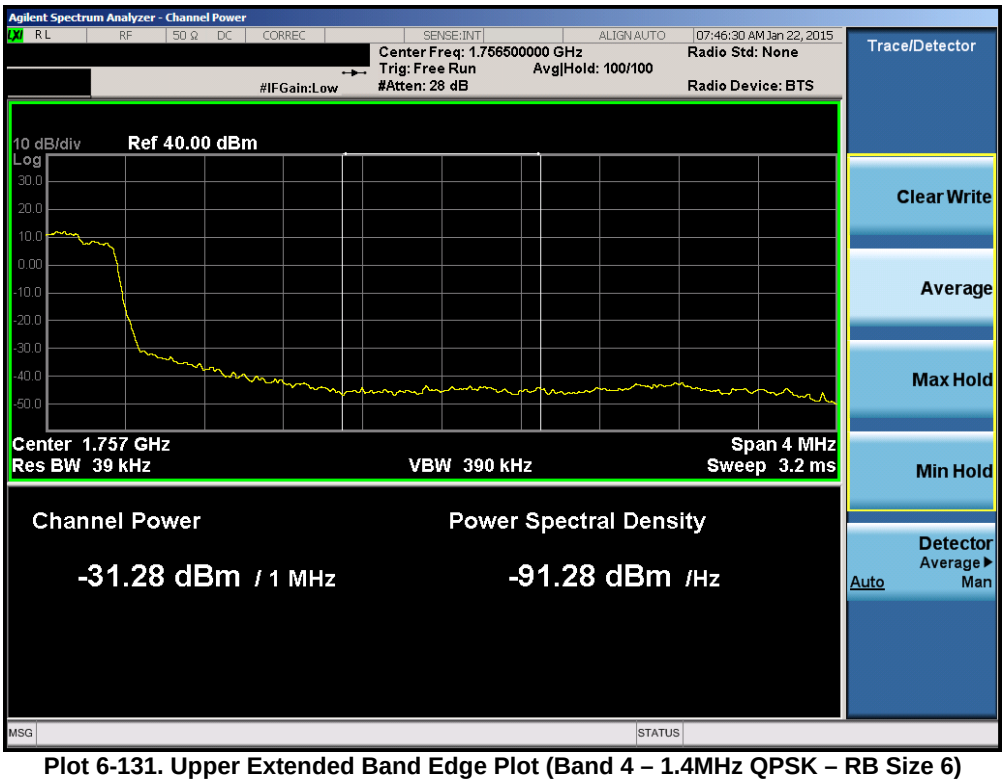


**Plot 6-133. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)**

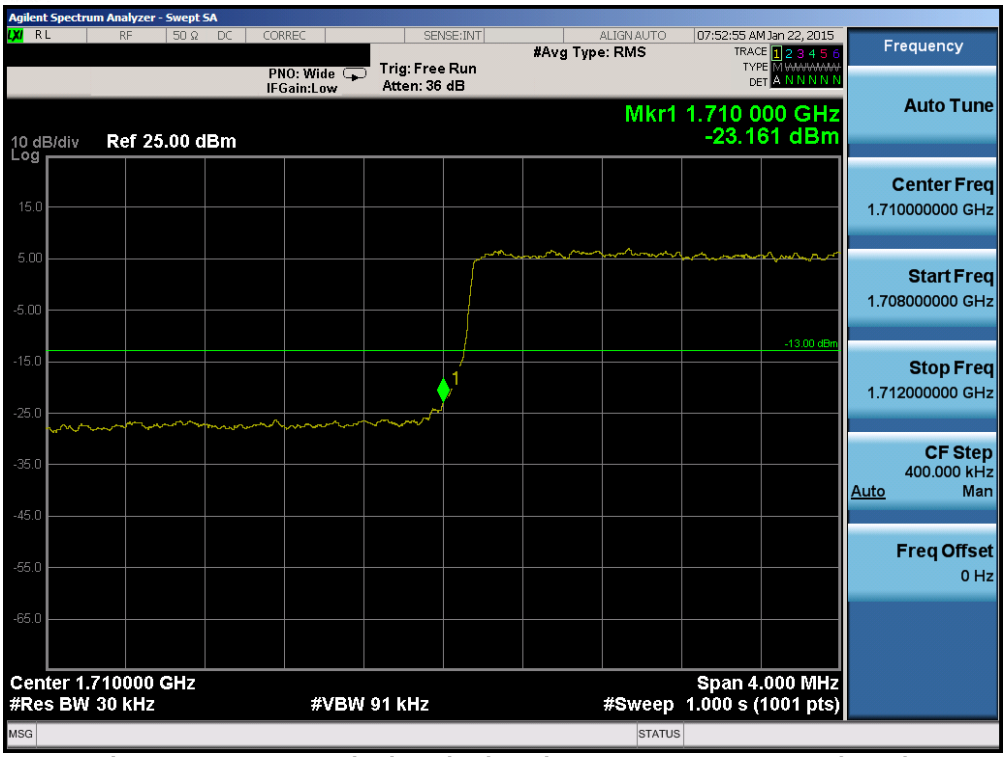


**Plot 6-134. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)**

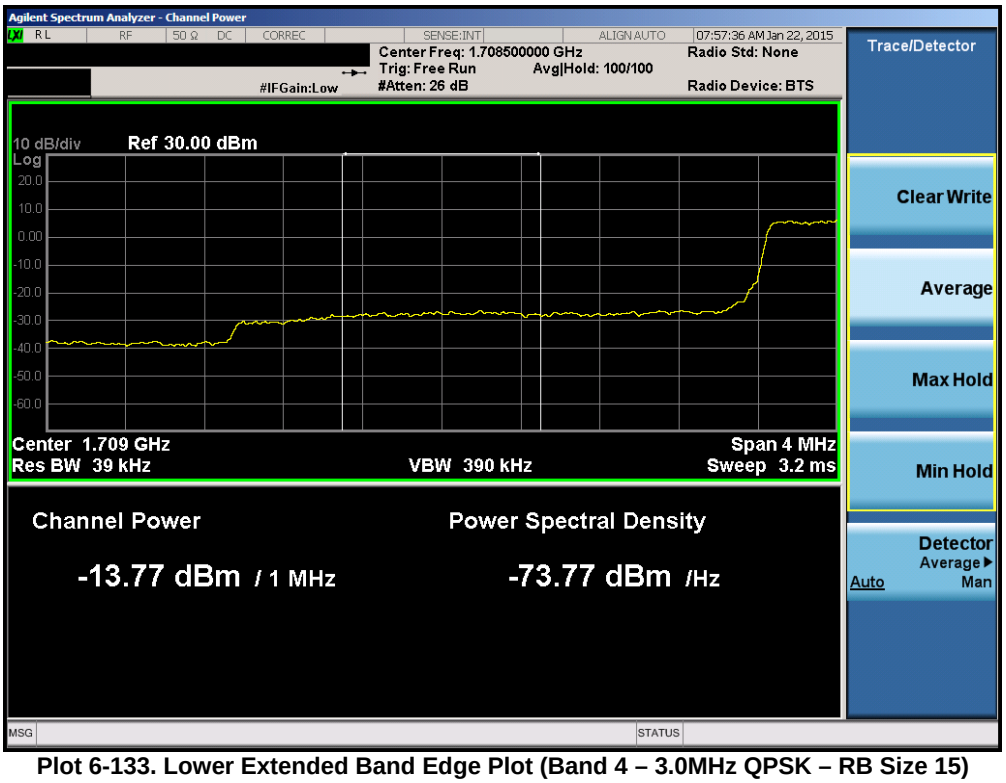


**Plot 6-135. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)**

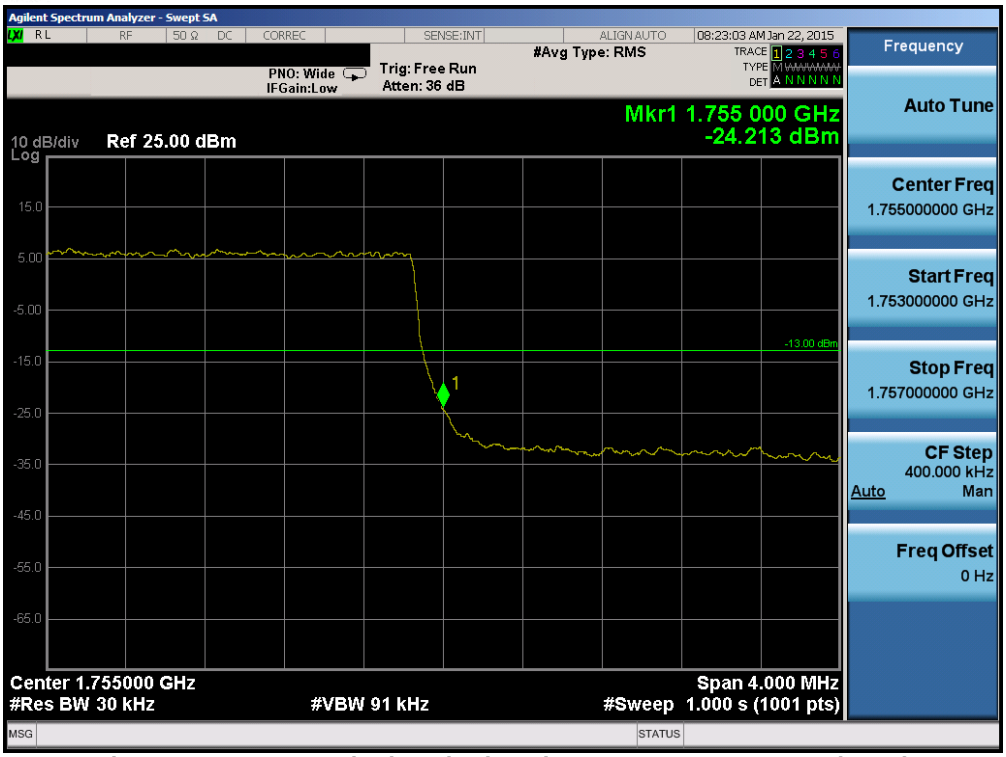


**Plot 6-136. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)**

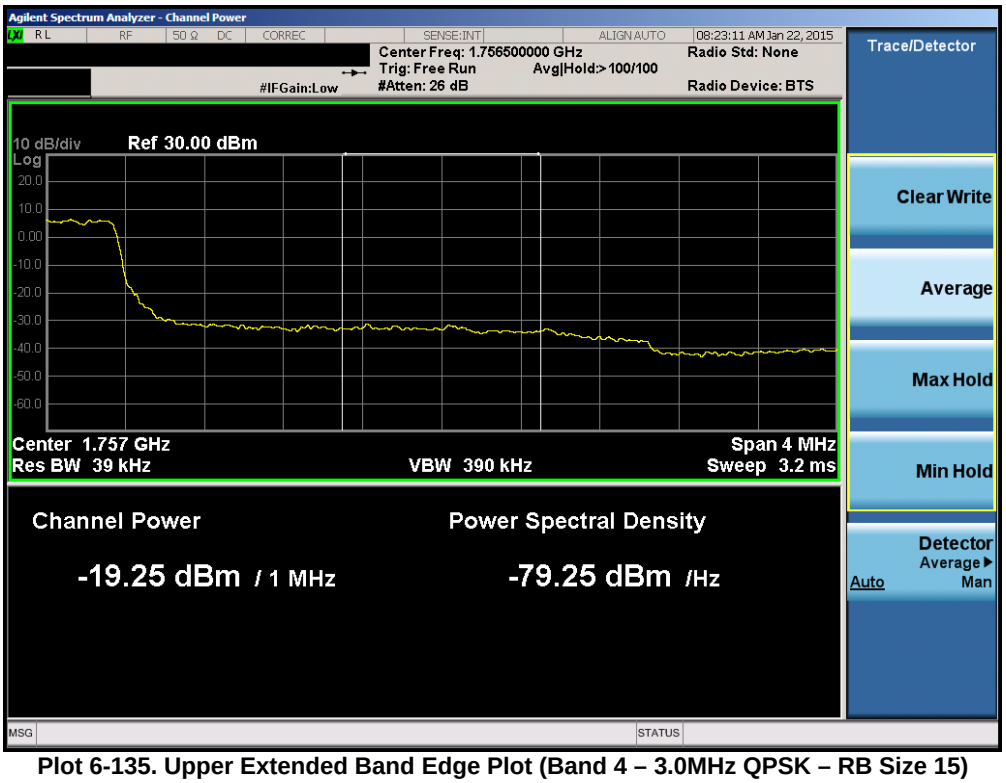


**Plot 6-137. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)**

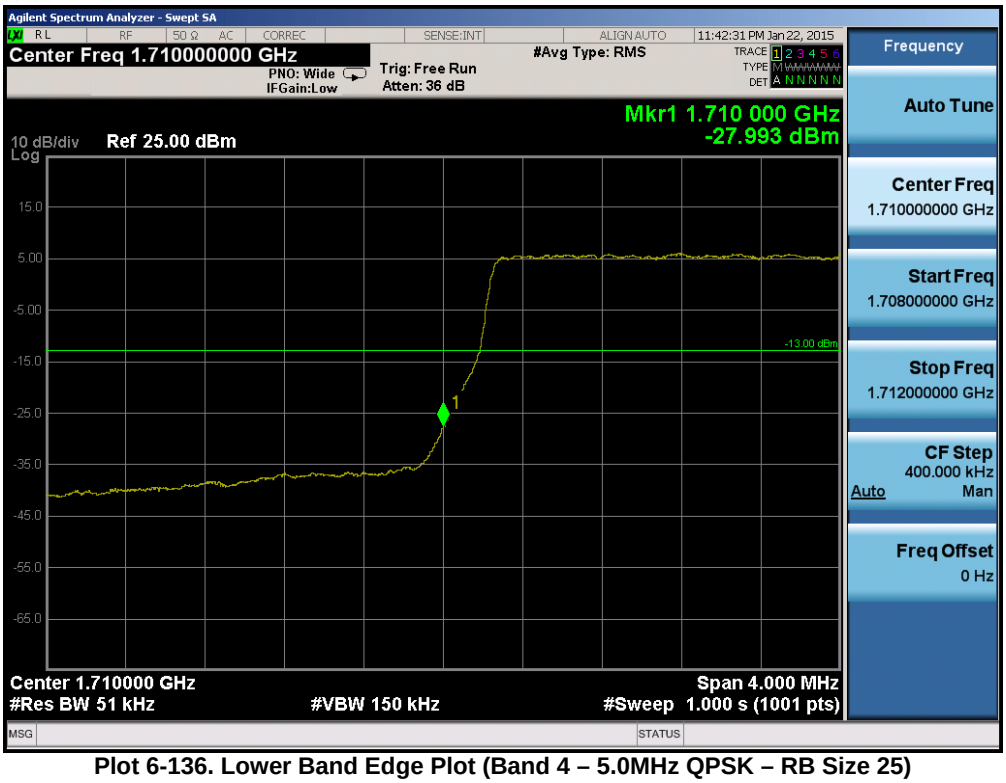


**Plot 6-138. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)**

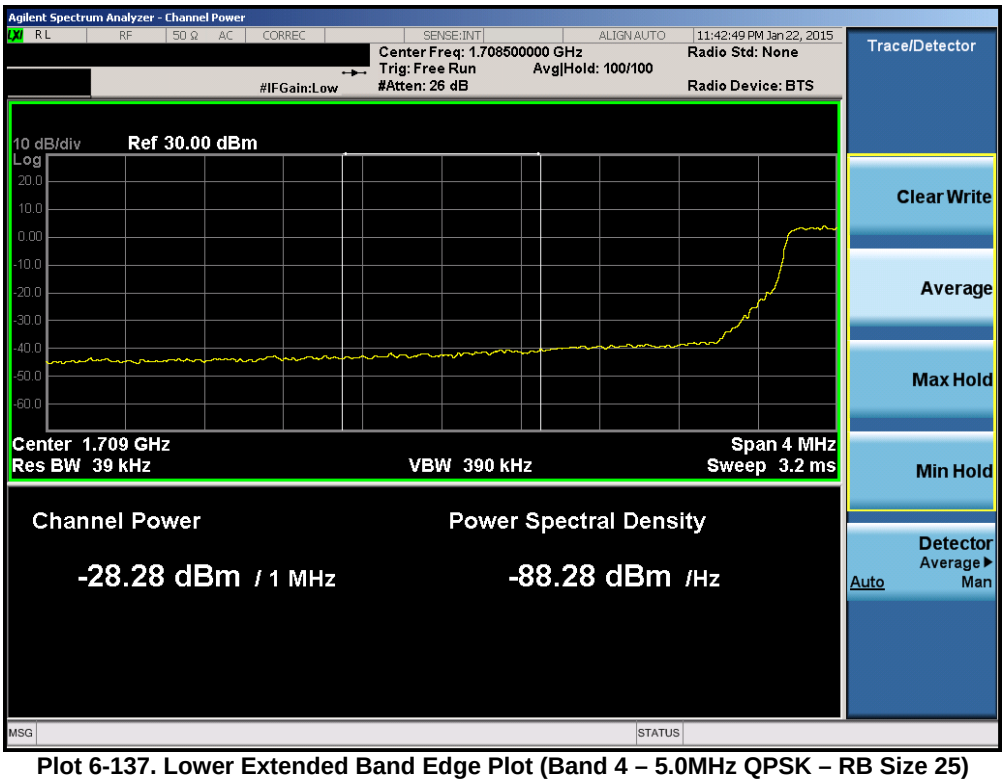


**Plot 6-139. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)**

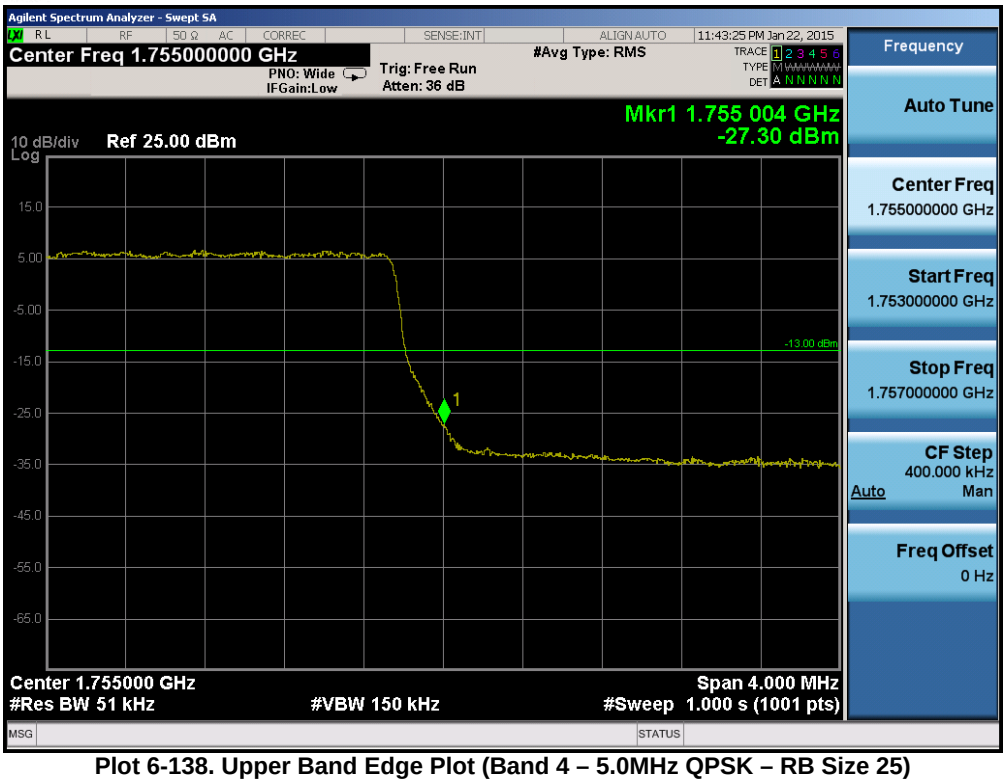


**Plot 6-140. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)**

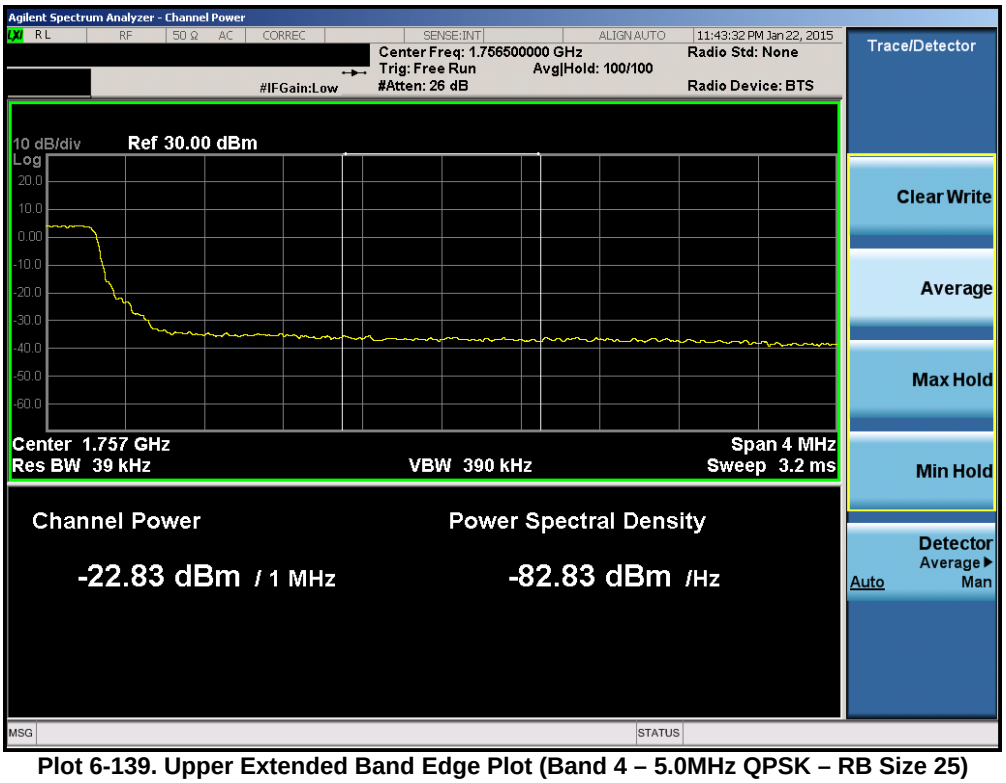


**Plot 6-141. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)**


**Plot 6-142. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)**

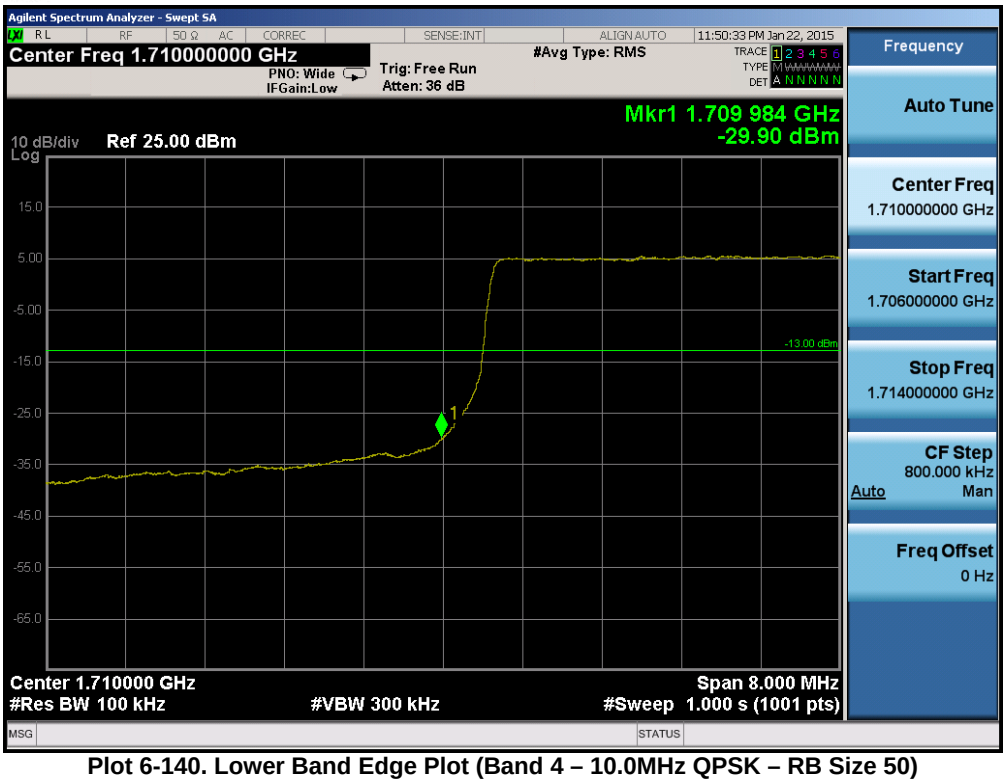


**Plot 6-143. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)**

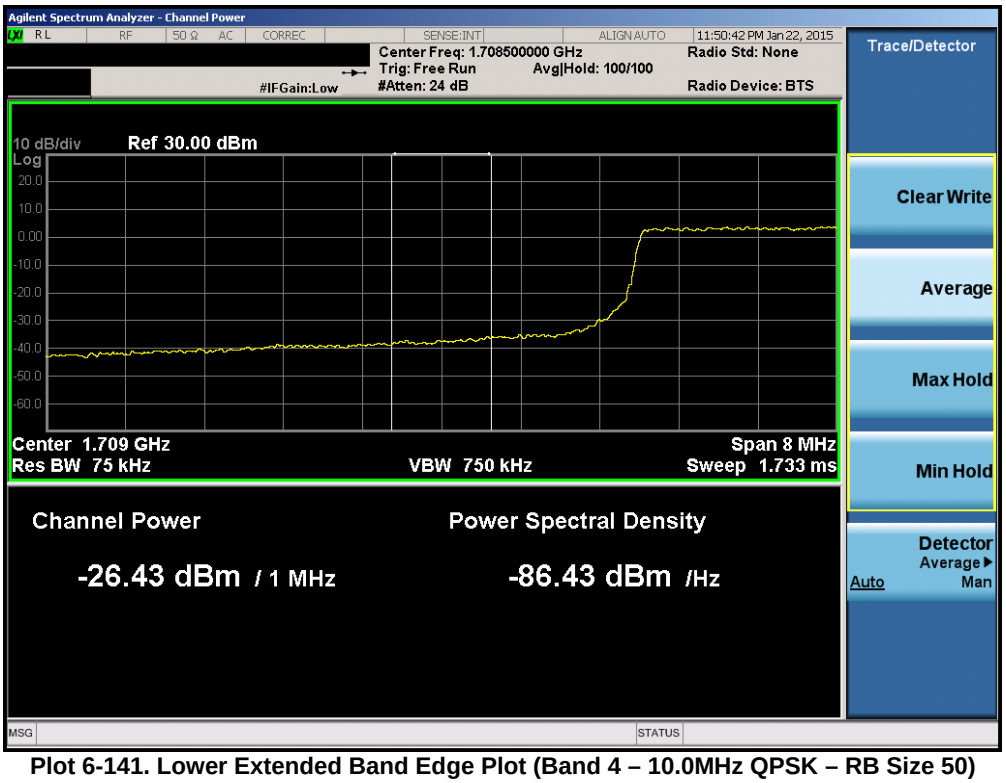
**Plot 6-144. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)**




**Plot 6-145. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)**

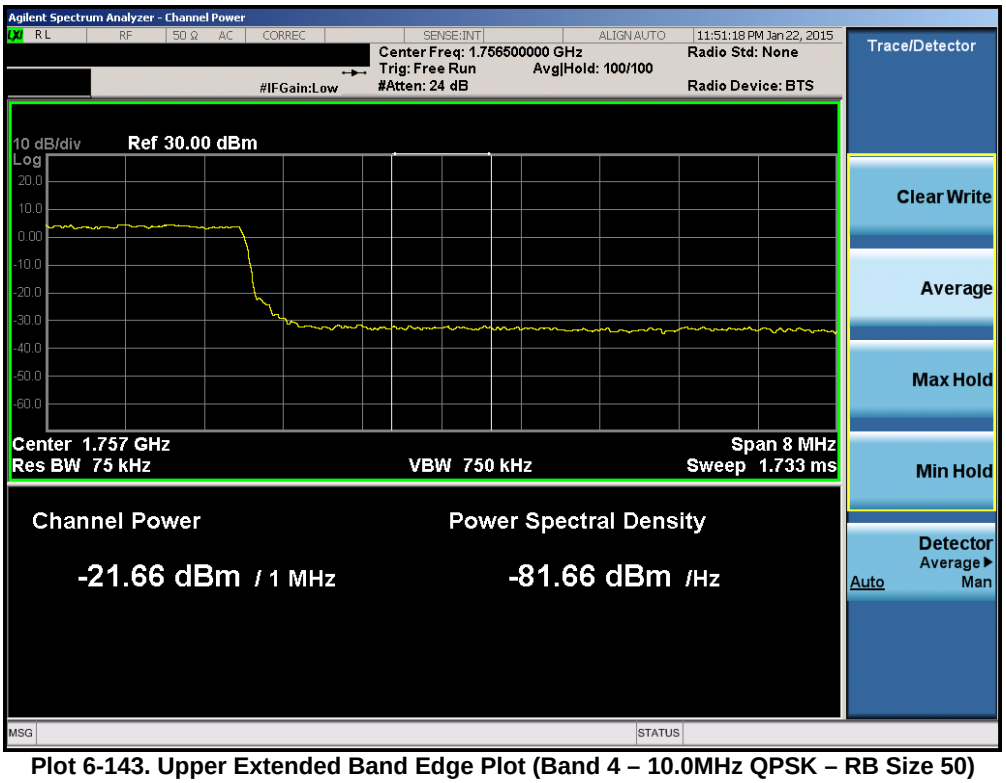


**Plot 6-146. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)**

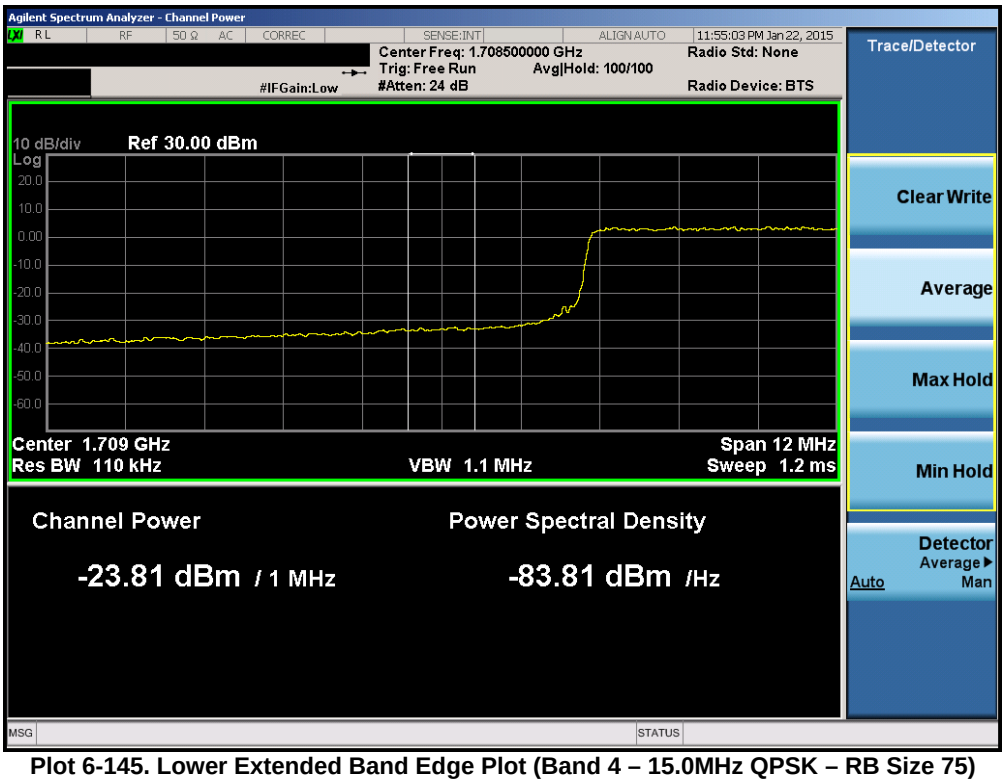


**Plot 6-147. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)**

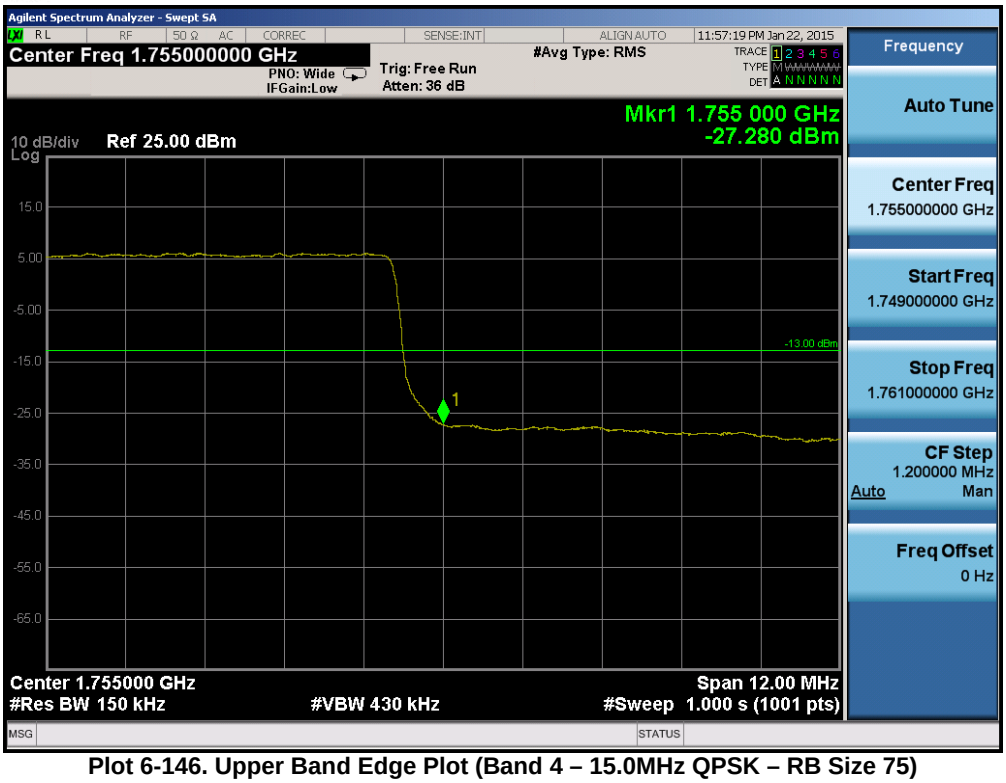


**Plot 6-148. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)**

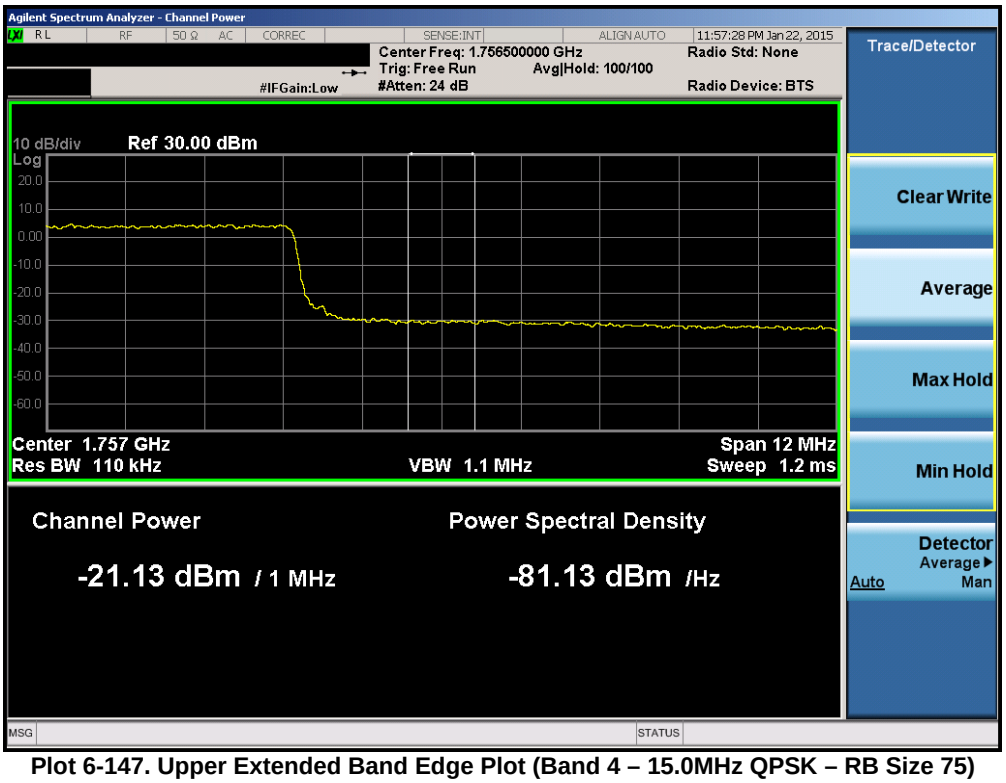


**Plot 6-149. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)**

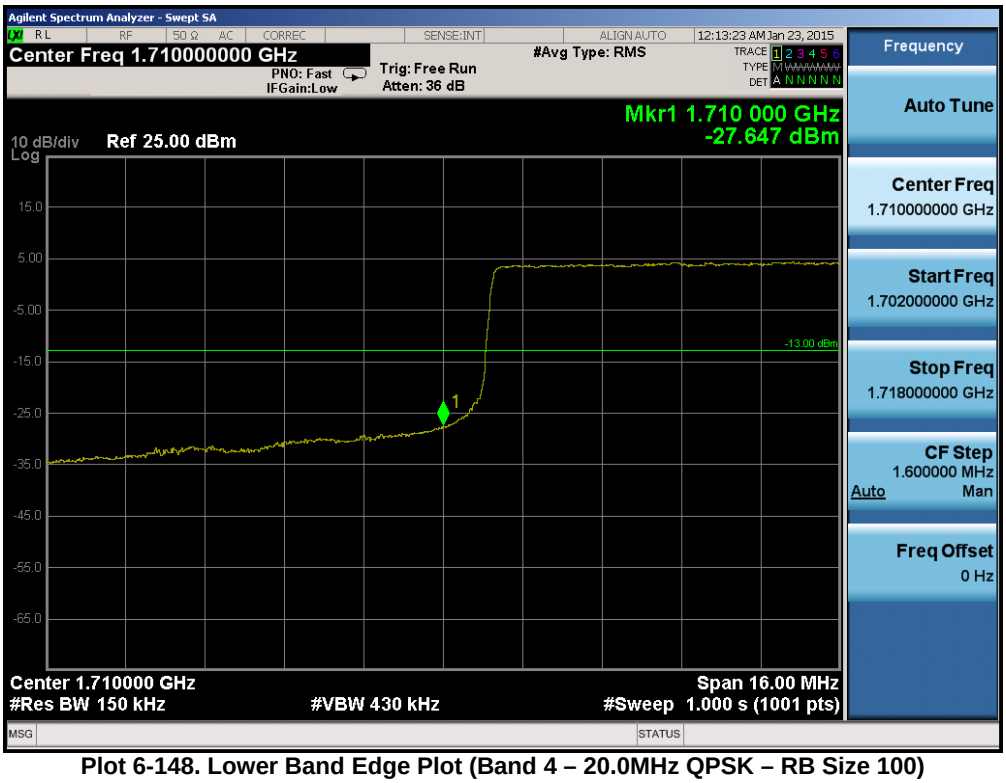


**Plot 6-150. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)**

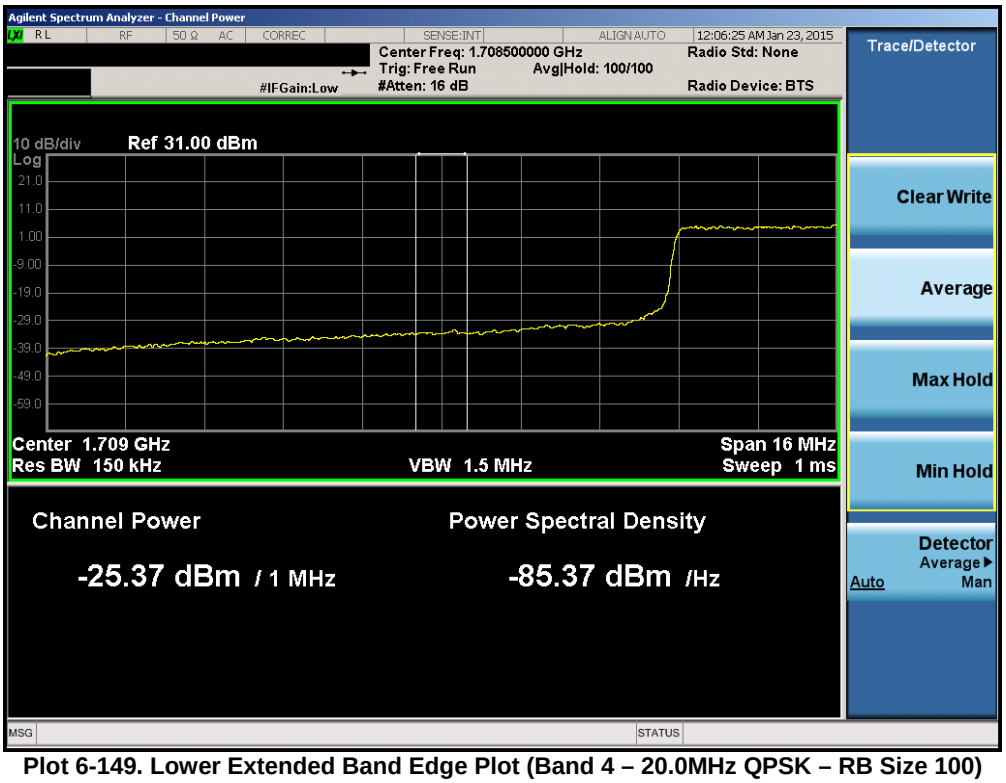


**Plot 6-151. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)**

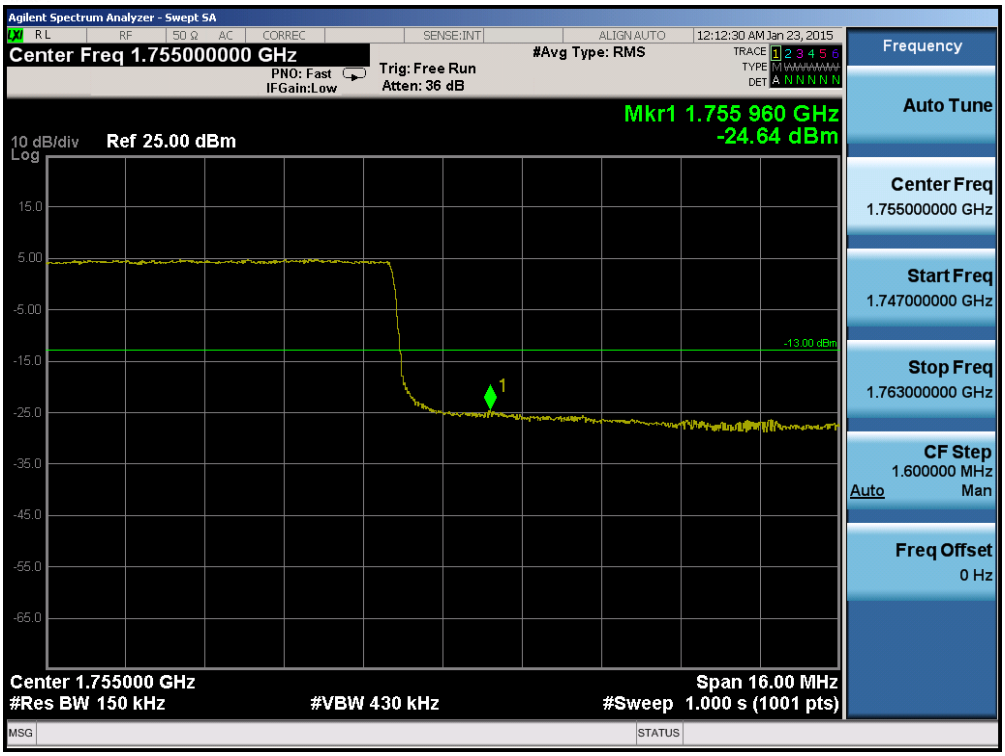


**Plot 6-152. Lower Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)**

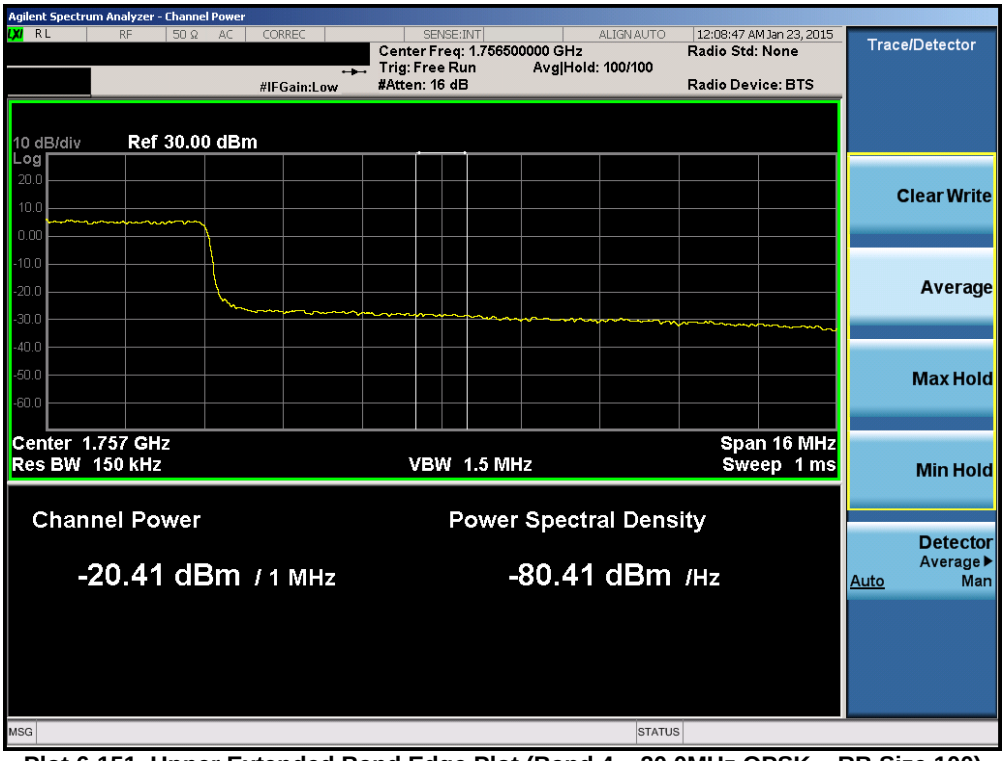


**Plot 6-153. Lower Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)**

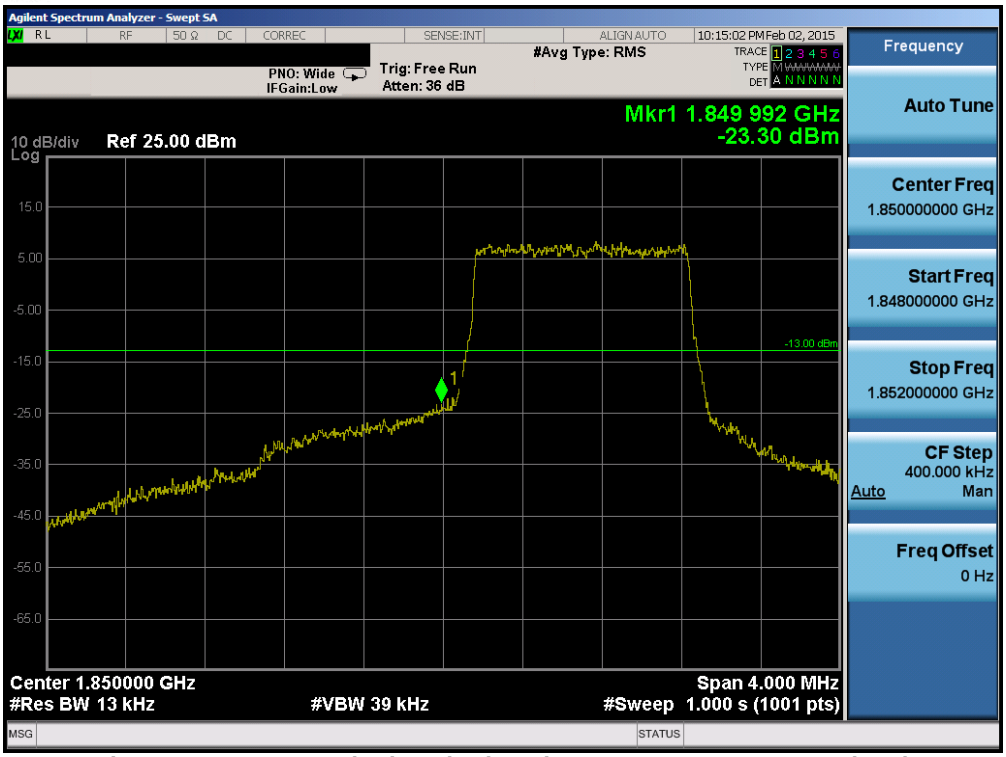


**Plot 6-154. Upper Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)**

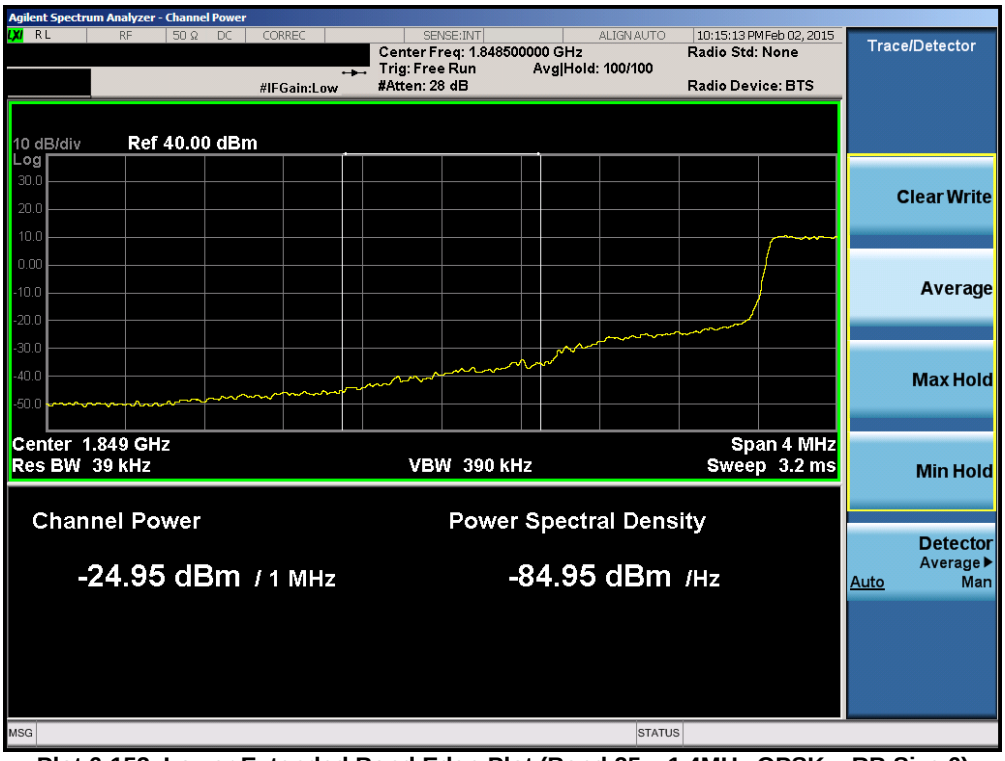


**Plot 6-155. Upper Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)**

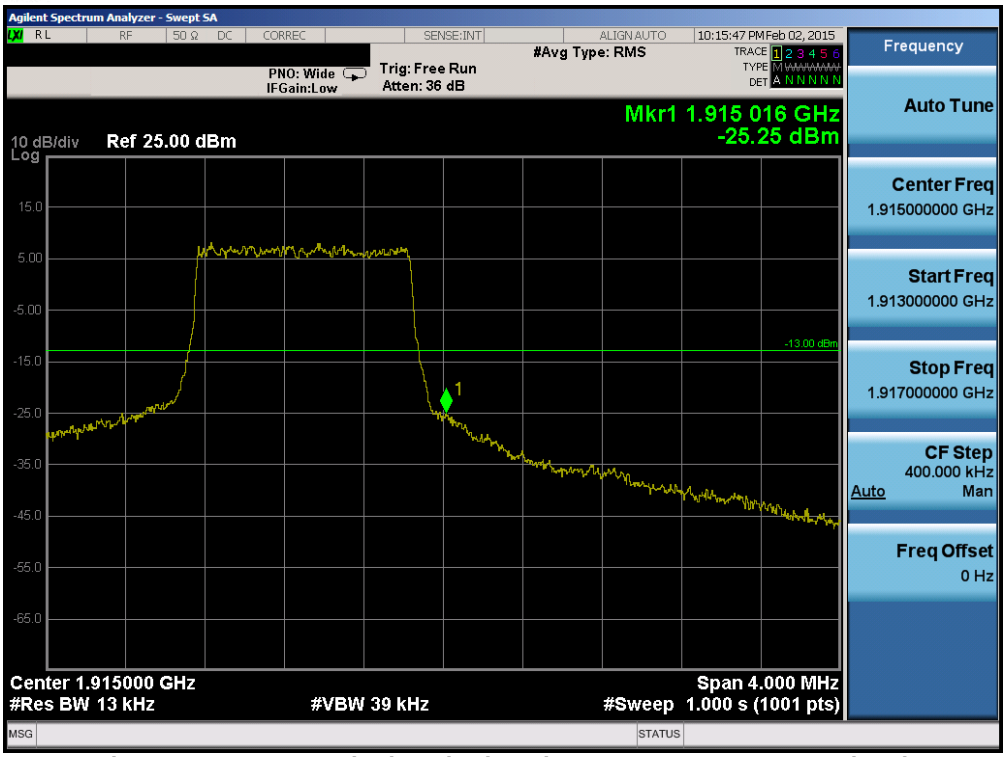


**Plot 6-156. Lower Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)**

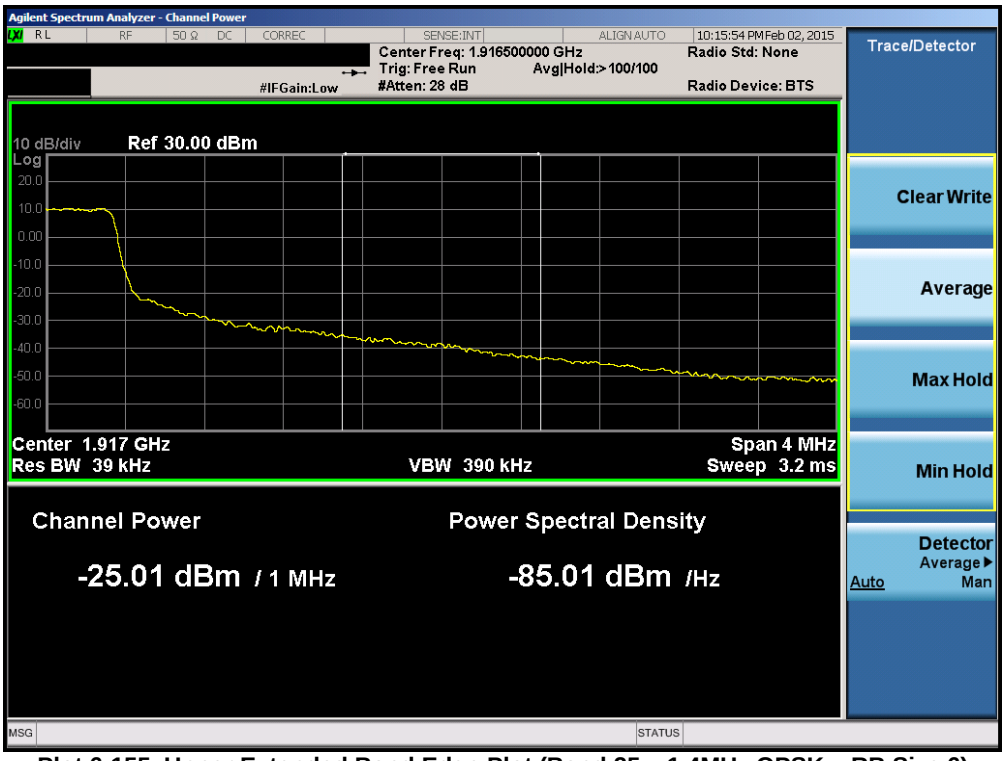


**Plot 6-157. Lower Extended Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)**

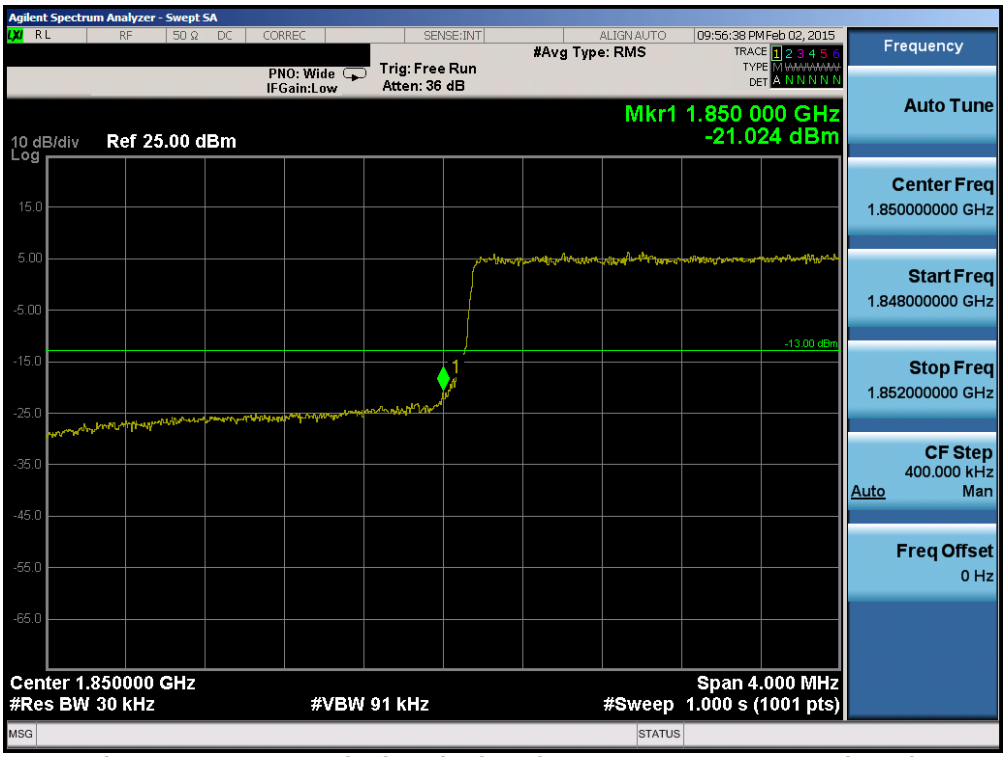


**Plot 6-158. Upper Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)**

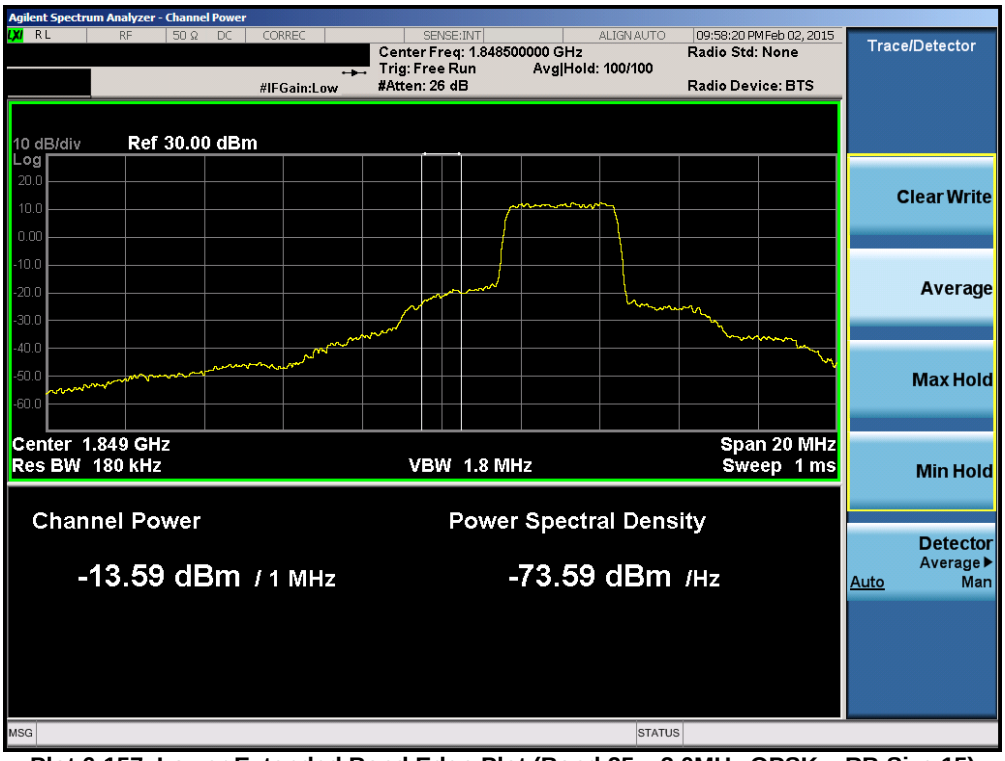


**Plot 6-159. Upper Extended Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)**

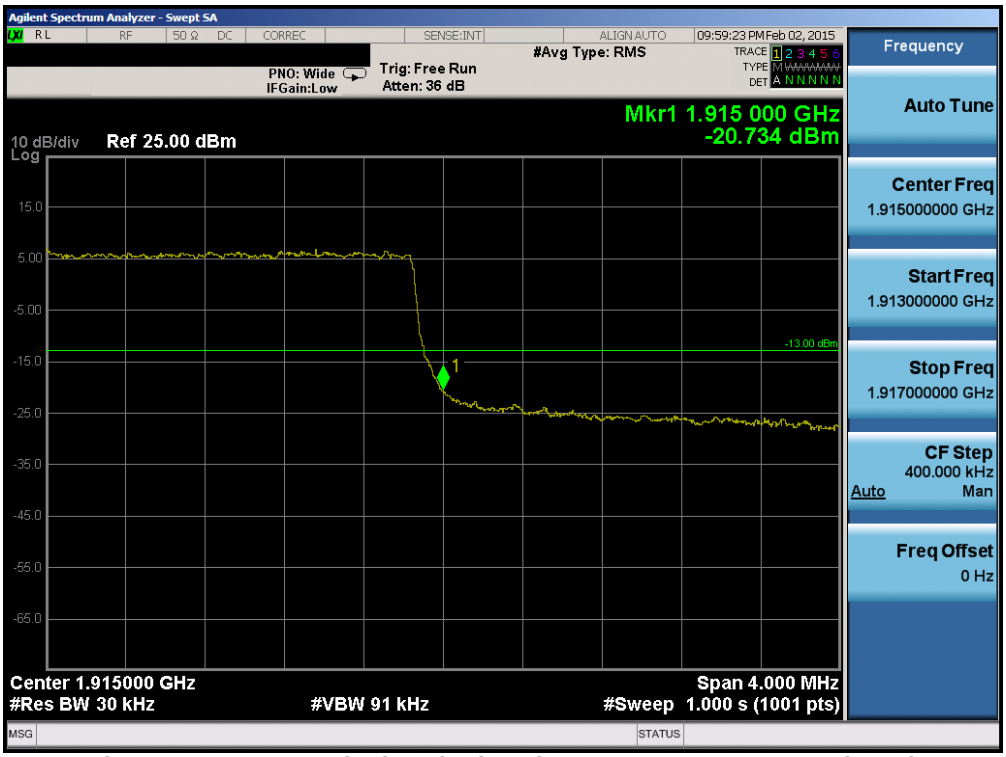


**Plot 6-160. Lower Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)**

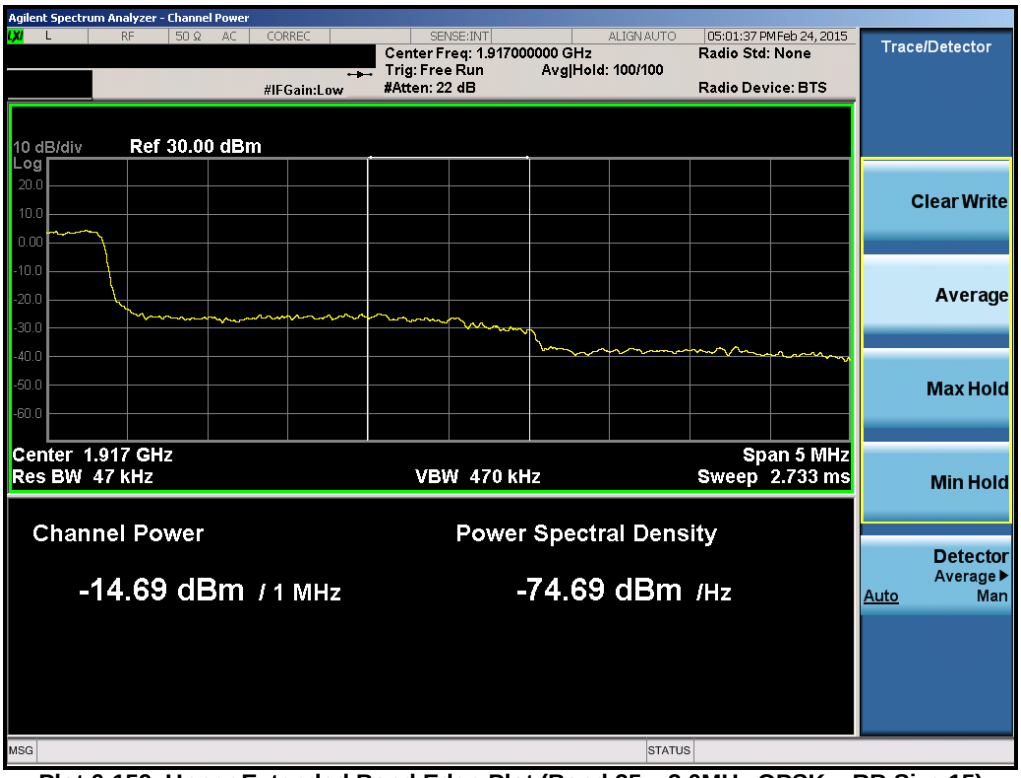


**Plot 6-161. Lower Extended Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)**

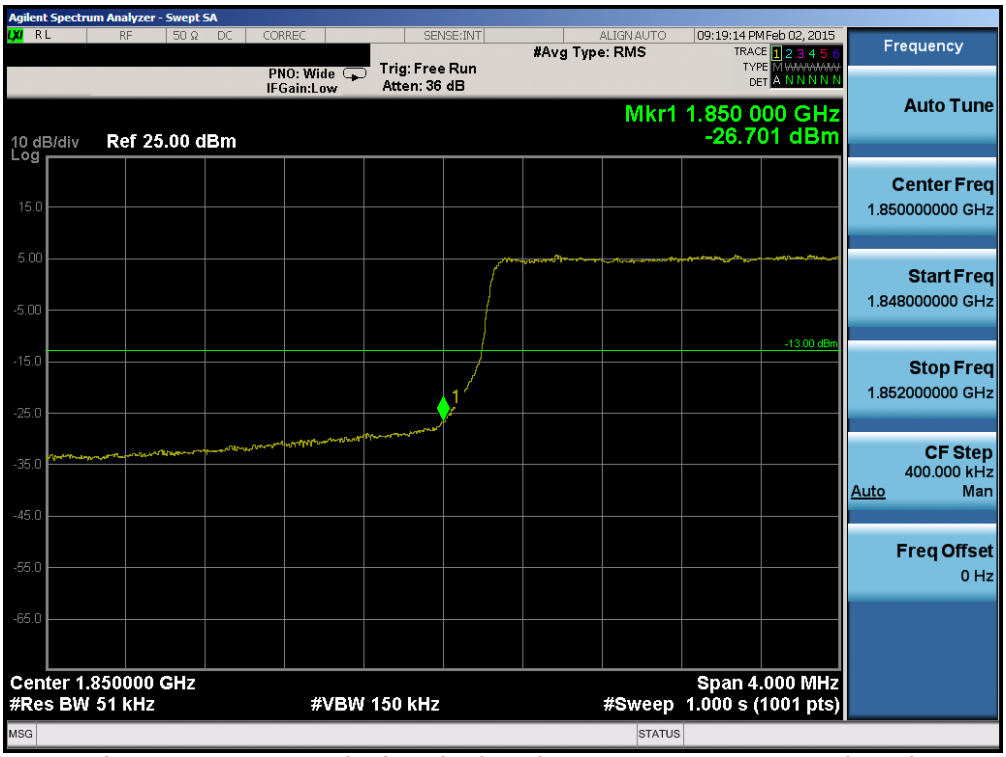


**Plot 6-162. Upper Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)**

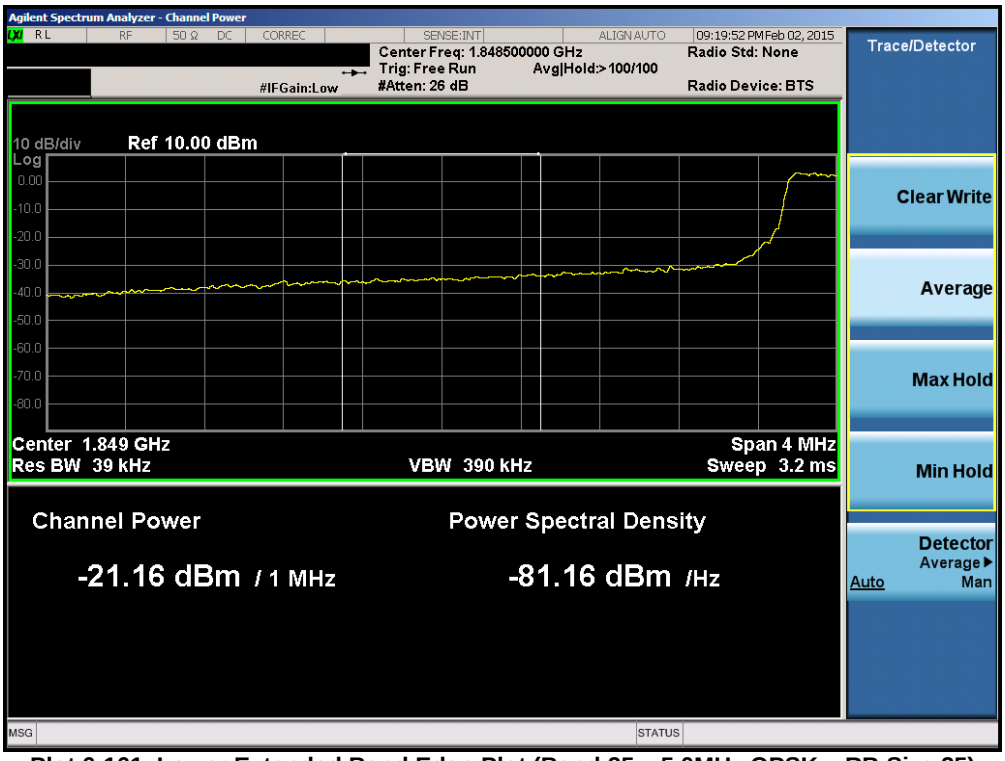


**Plot 6-163. Upper Extended Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)**

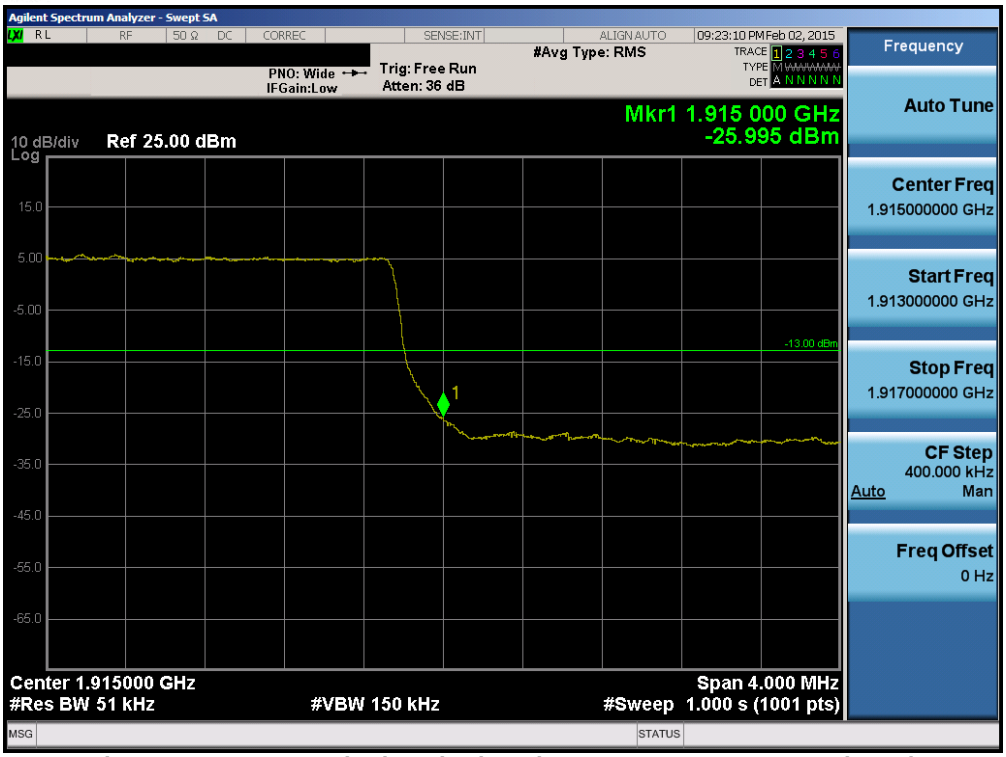


**Plot 6-164. Lower Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)**


**Plot 6-165. Lower Extended Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)**

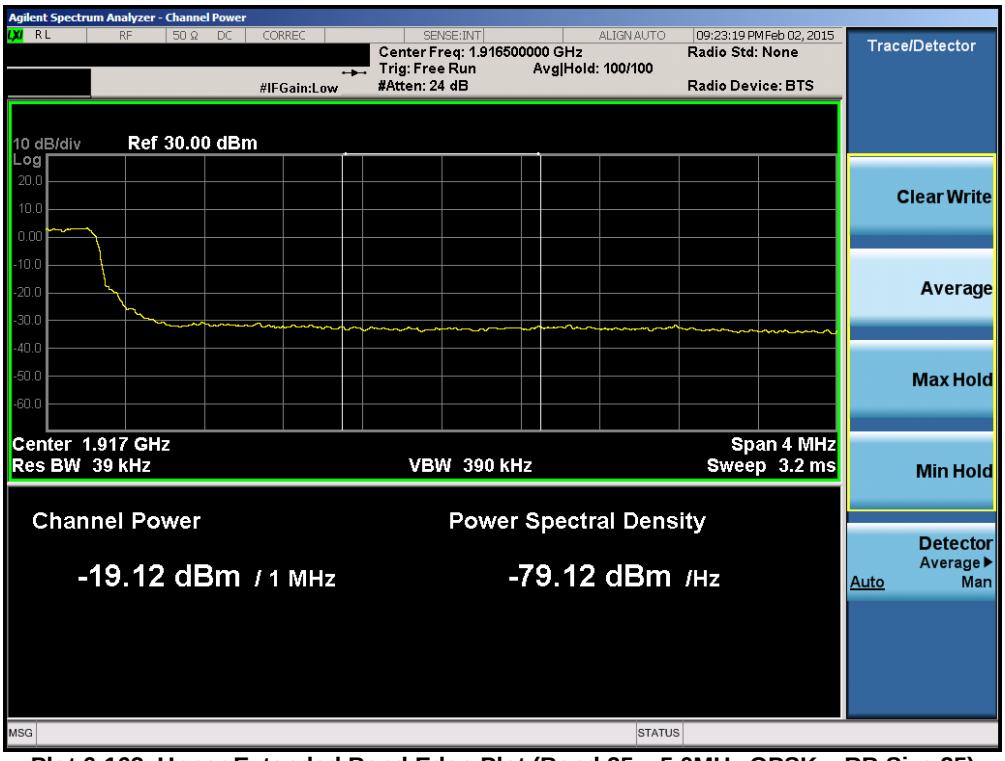


**Plot 6-166. Upper Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)**

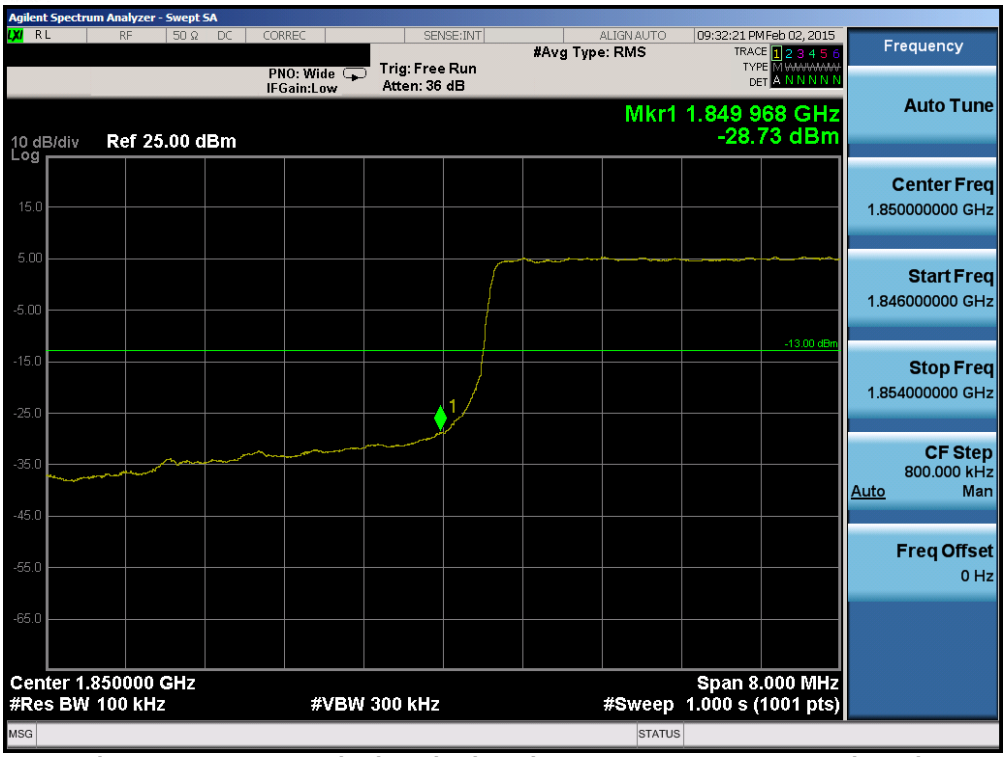
**Plot 6-167. Upper Extended Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)**




**Plot 6-168. Lower Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)**

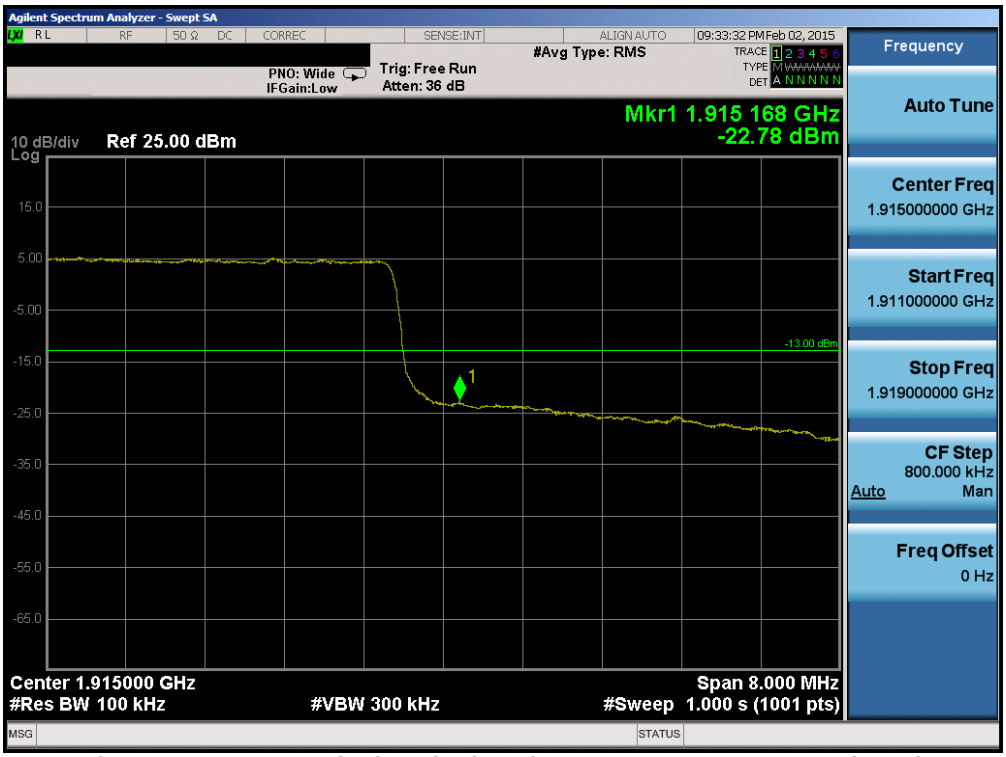
**Plot 6-169. Lower Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)**




**Plot 6-170. Upper Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)**

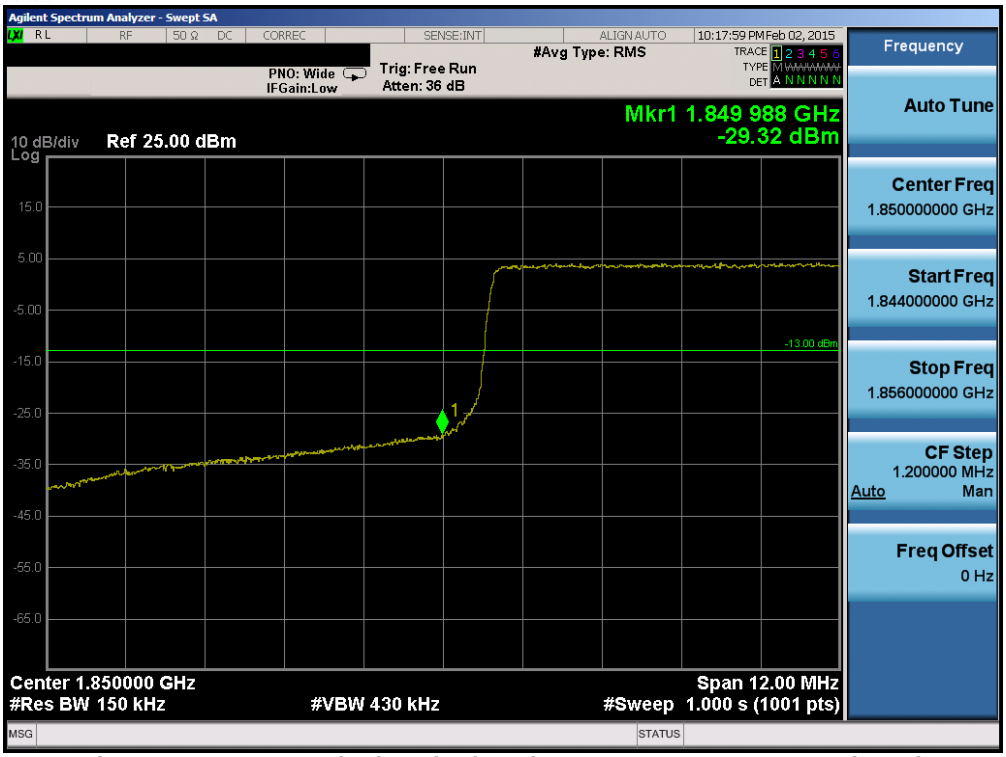
**Plot 6-171. Upper Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)**




**Plot 6-172. Lower Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)**

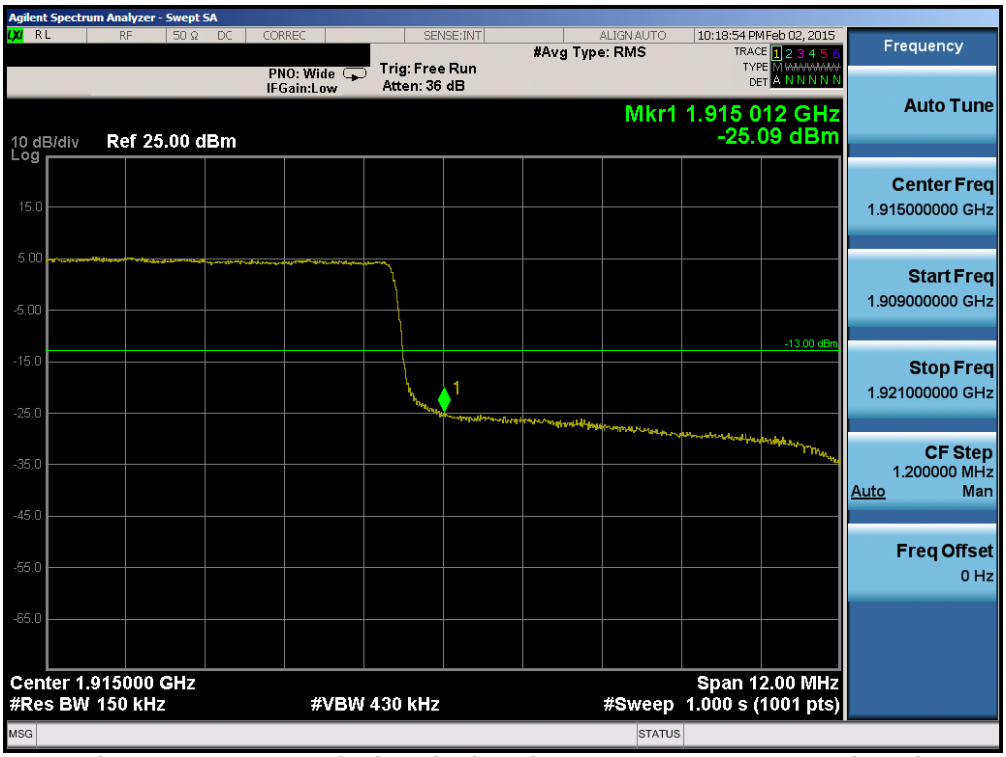


**Plot 6-173. Lower Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)**

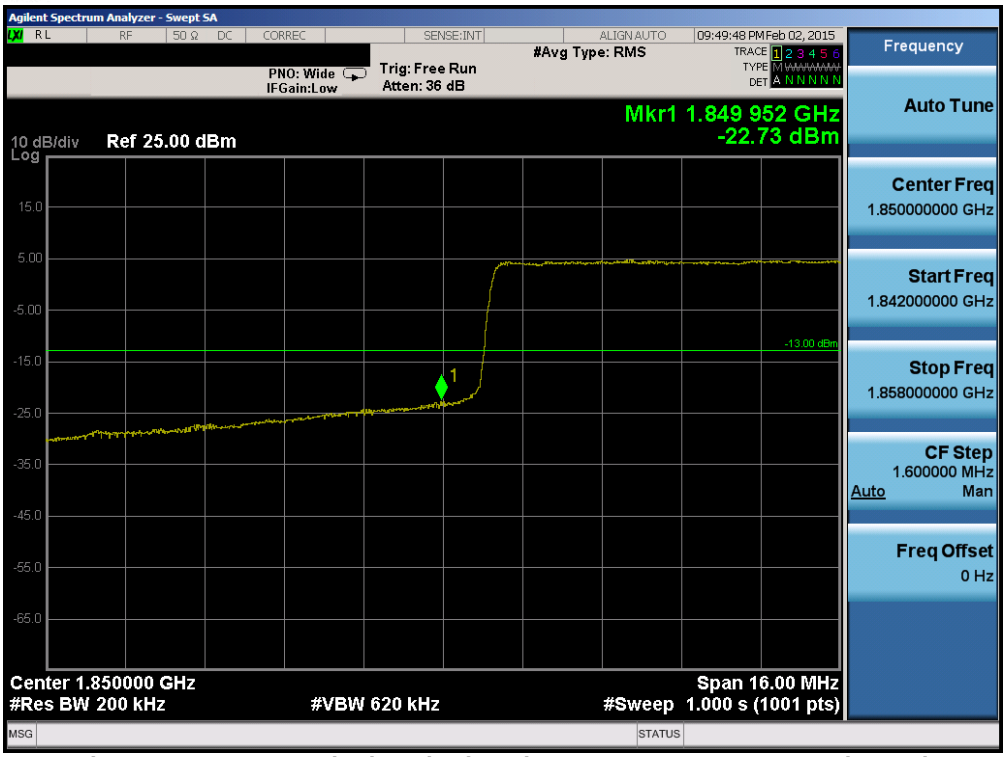


**Plot 6-174. Upper Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)**

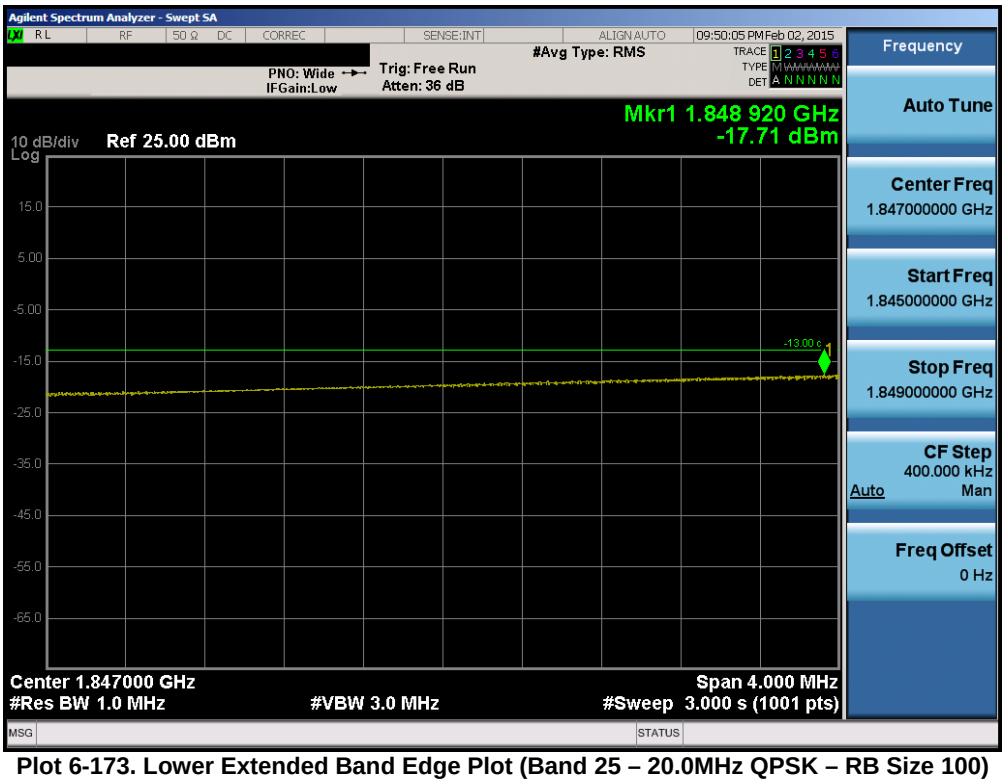


**Plot 6-175. Upper Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)**

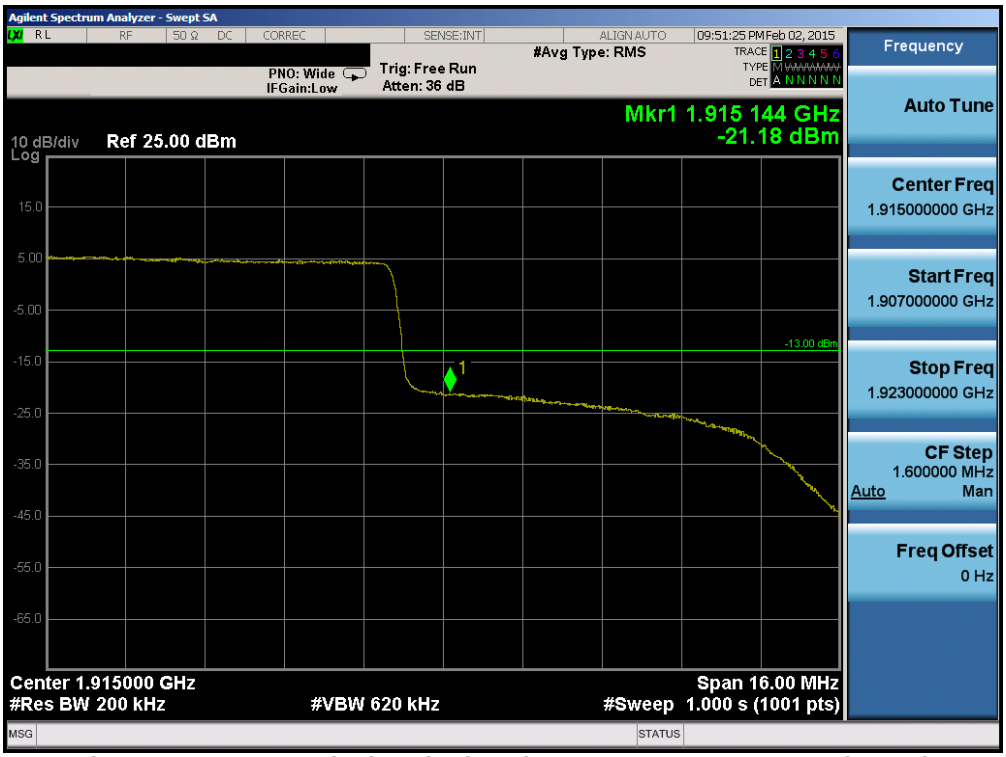


**Plot 6-176. Lower ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)**

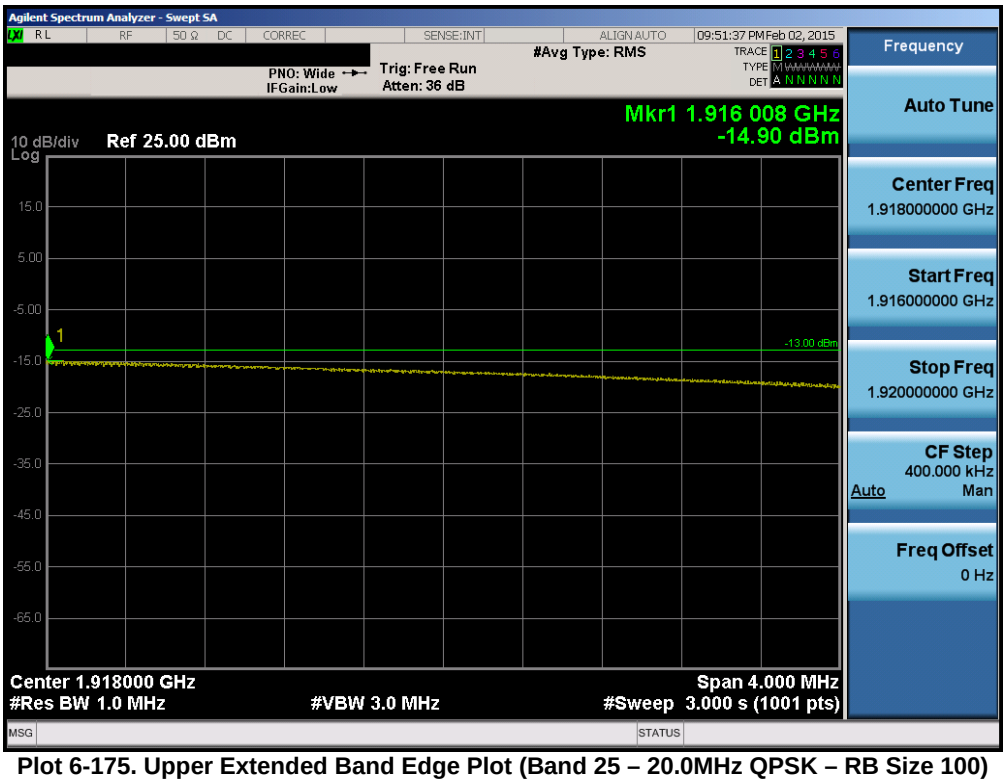


**Plot 6-177. Upper ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)**

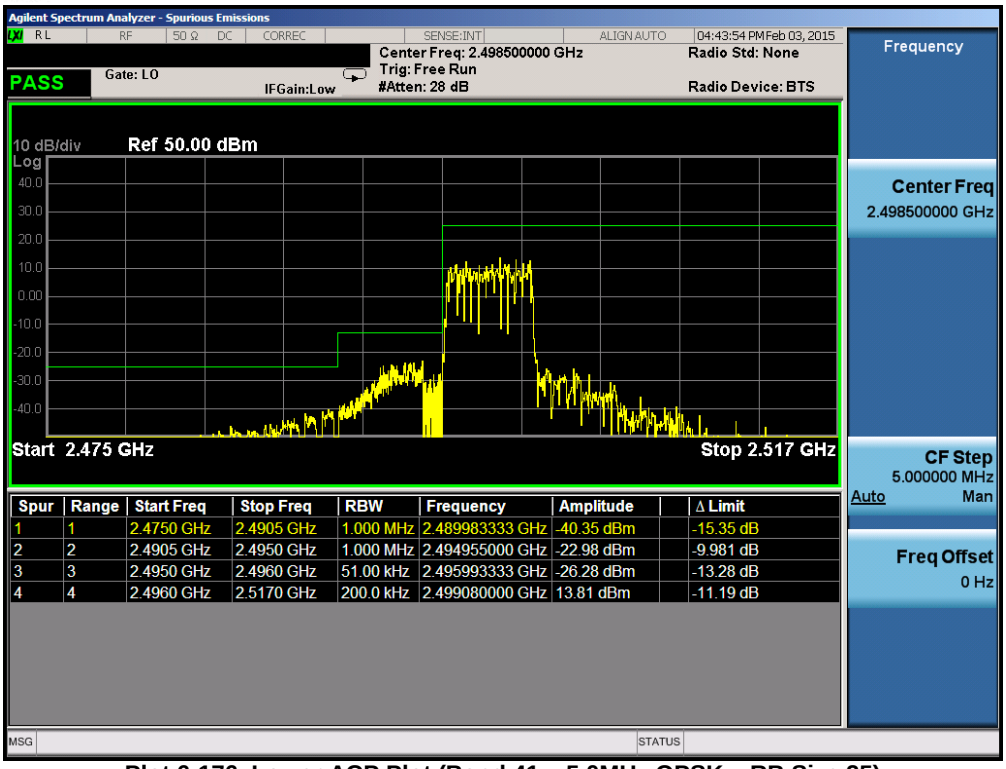


**Plot 6-178. Lower ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)**

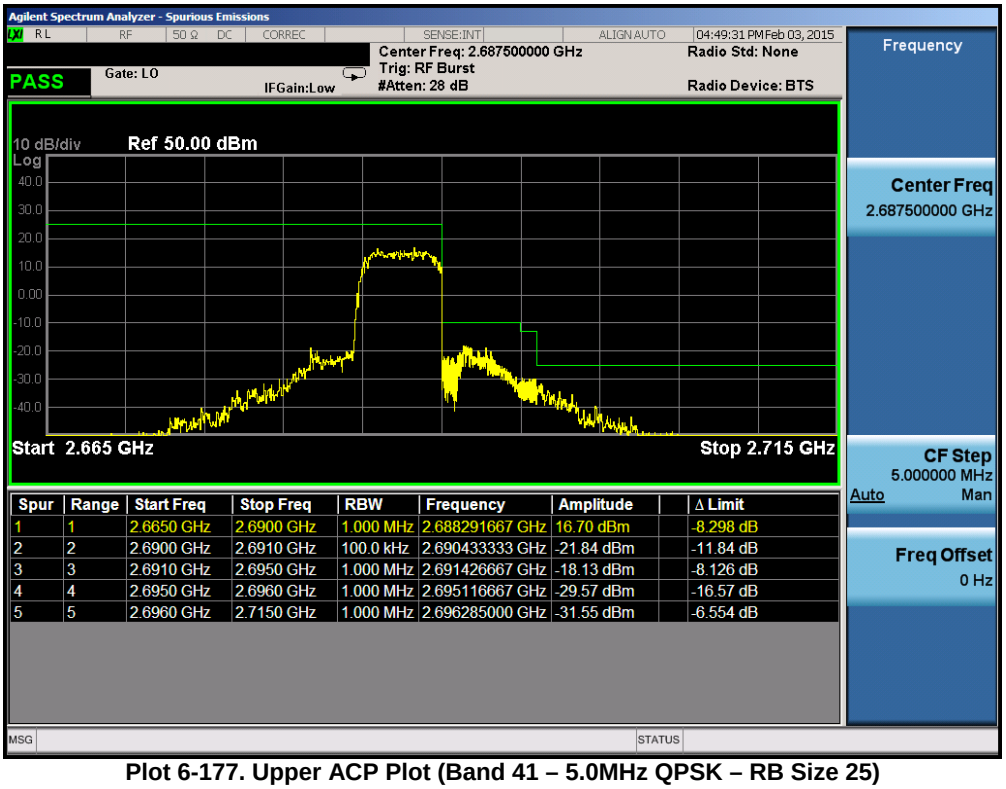


**Plot 6-179. Upper ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)**

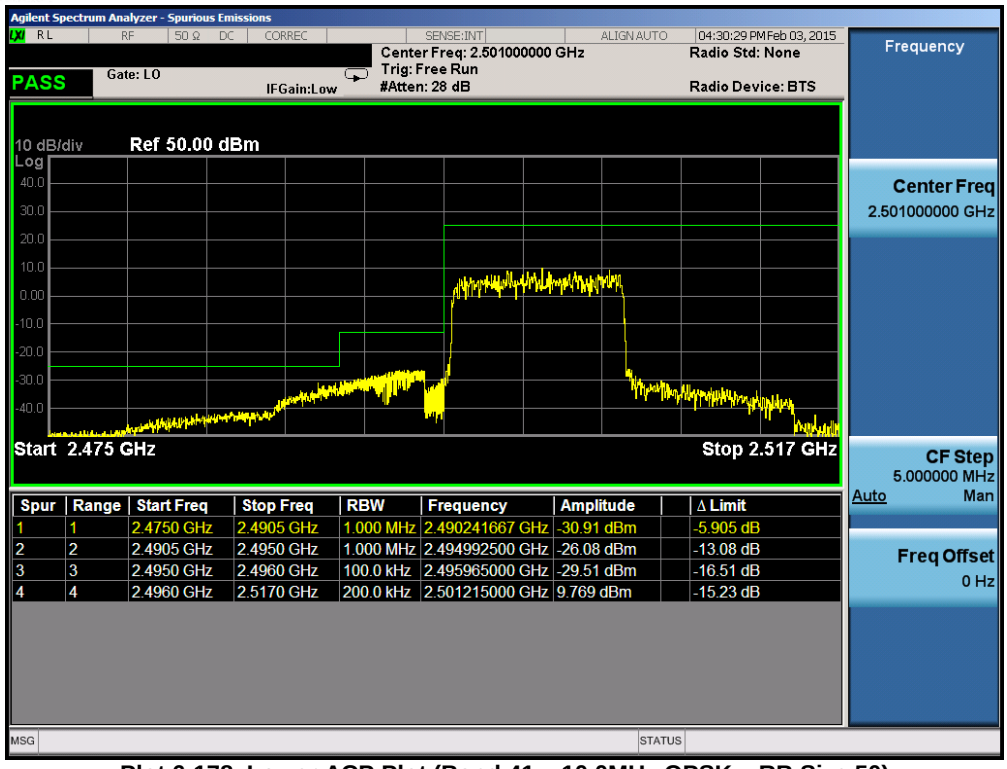


**Plot 6-180. Lower ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)**

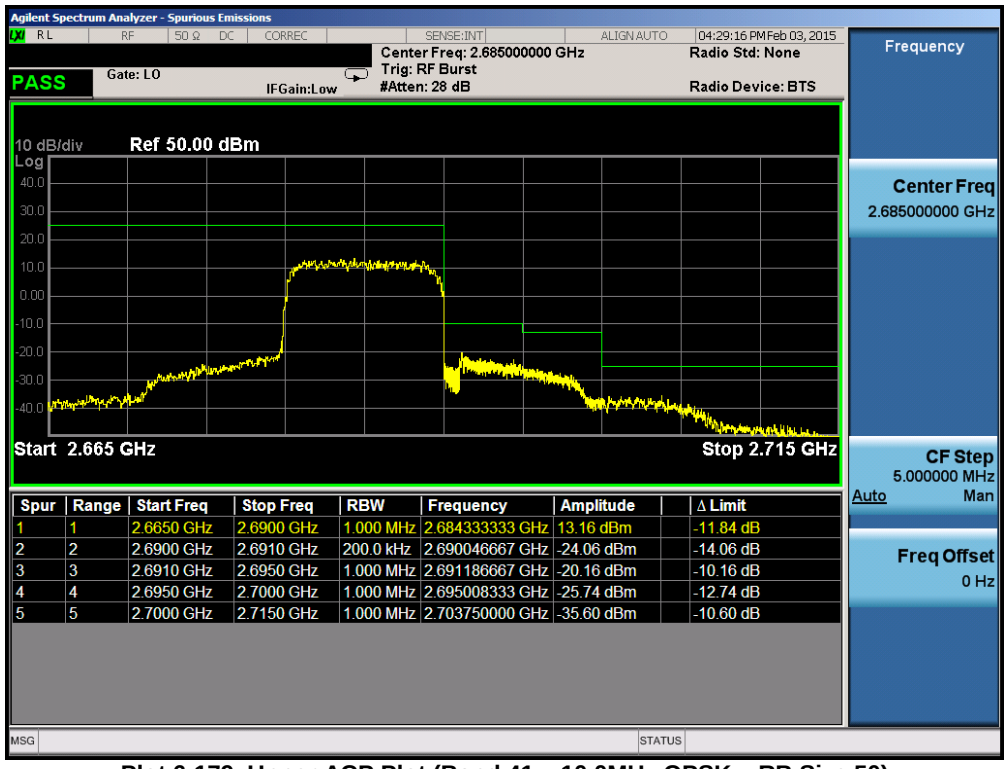


**Plot 6-181. Upper ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)**

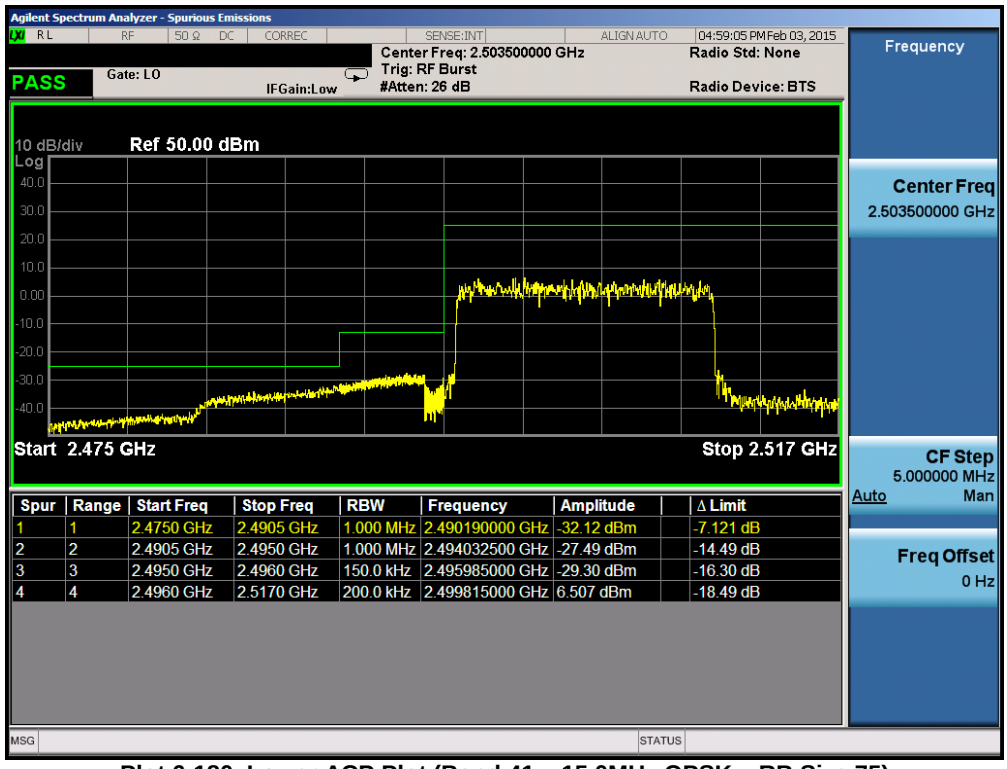


**Plot 6-182. Lower ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)**

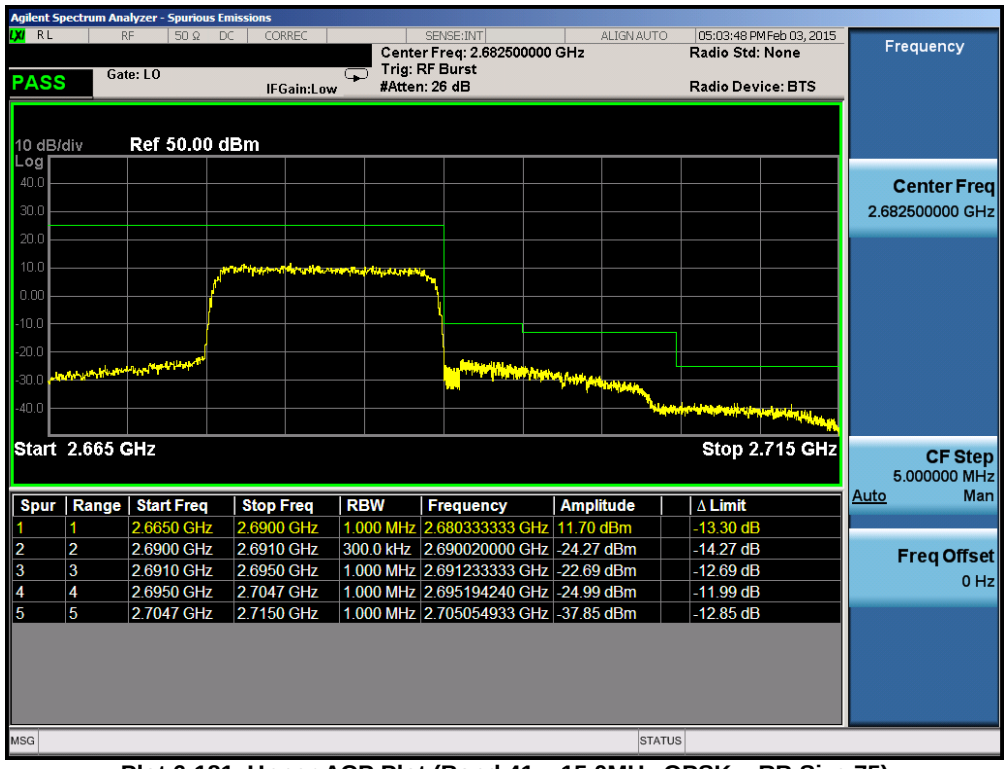


**Plot 6-183. Upper ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)**

## 6.5 Peak-Average Ratio

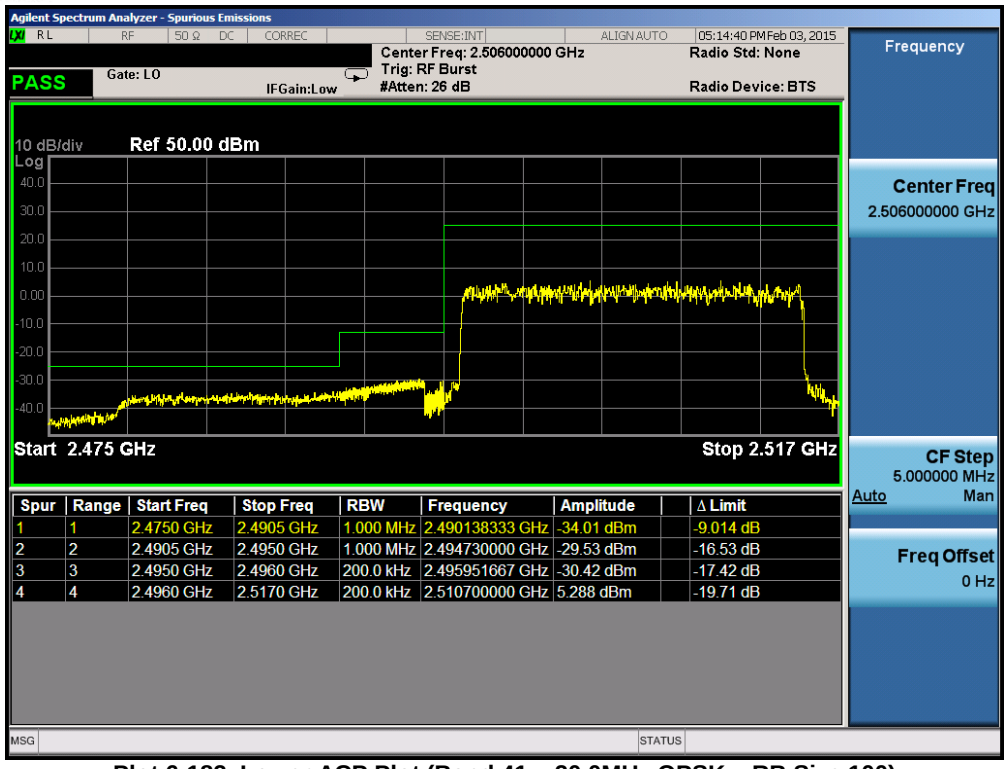**§24.232(d)**

### Test Overview

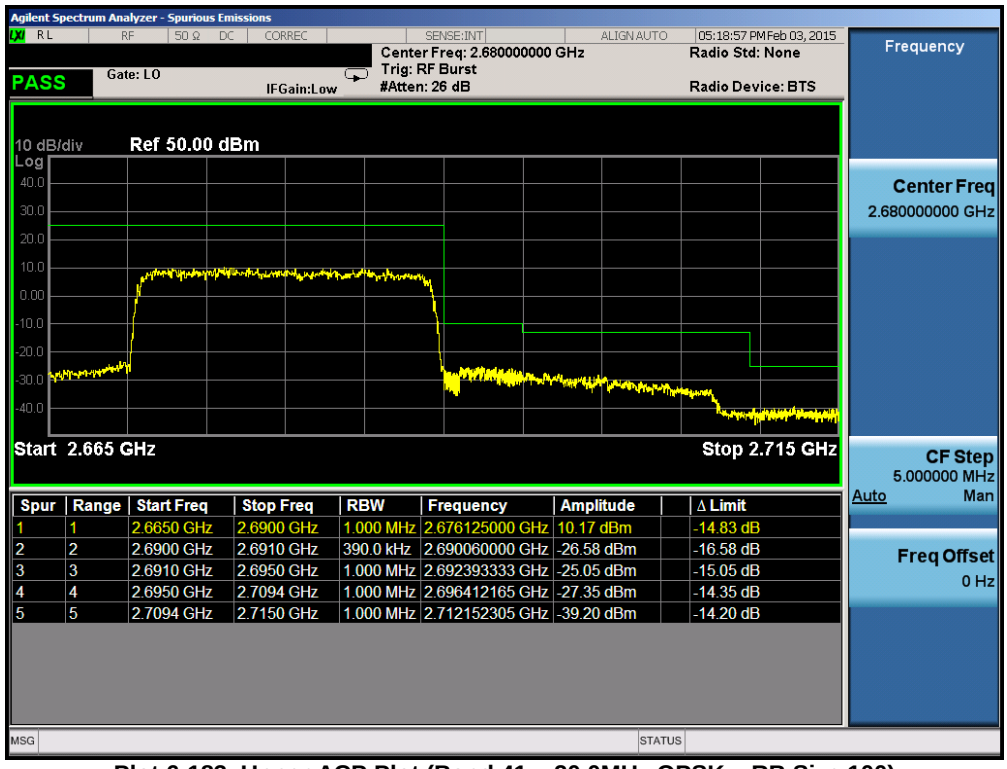A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 v02r02 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

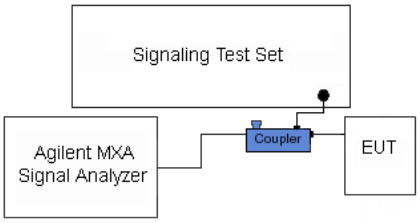


**Figure 6-4. Test Instrument & Measurement Setup**

### Test Notes

None.




**Plot 6-184. PAR Plot (Band 25 – 1.4MHz QPSK – RB Size 6)**




**Plot 6-185. PAR Plot (Band 25 – 1.4MHz 16-QAM – RB Size 6)**

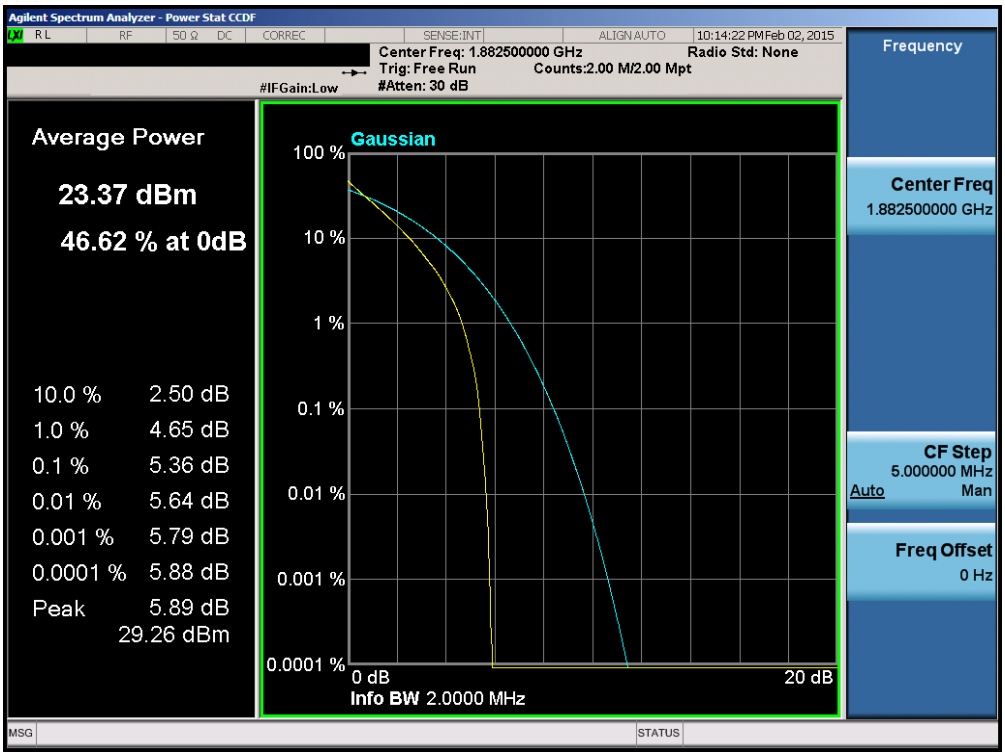


**Plot 6-186. PAR Plot (Band 25 – 3.0MHz QPSK – RB Size 15)**

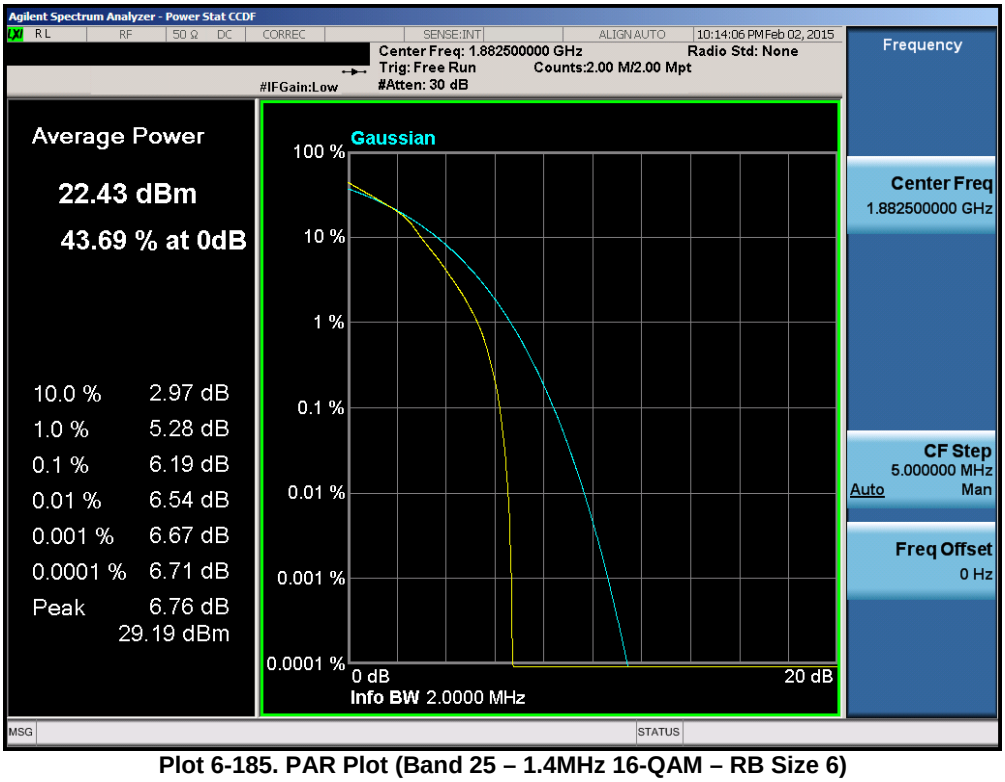


**Plot 6-187. PAR Plot (Band 25 – 3.0MHz 16-QAM – RB Size 15)**

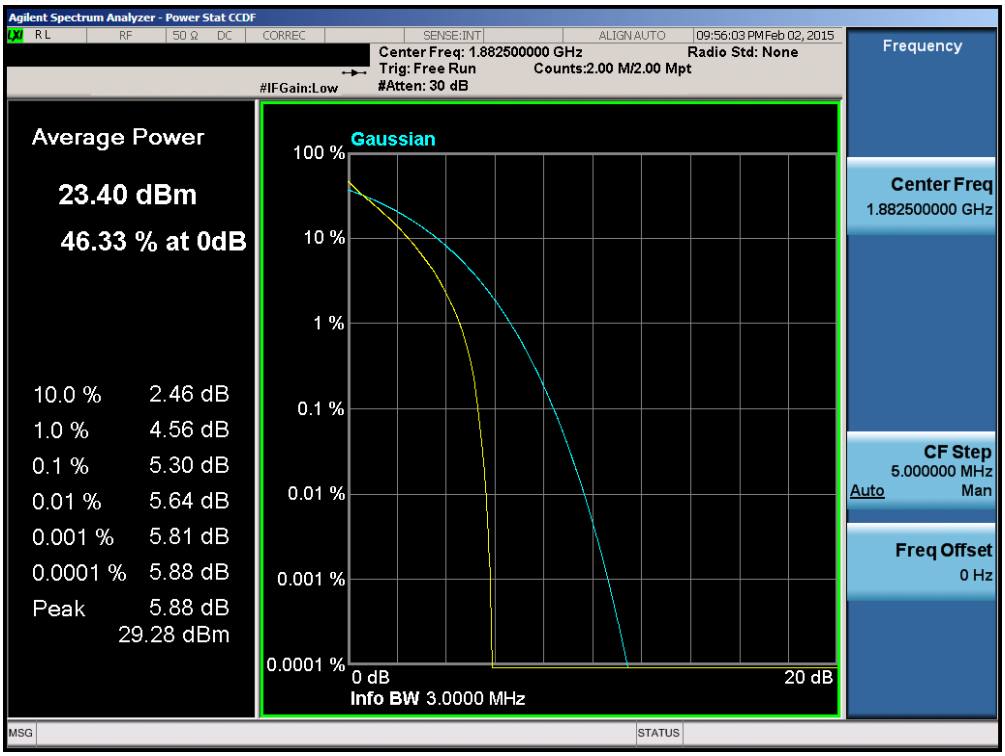


**Plot 6-188. PAR Plot (Band 25 – 5.0MHz QPSK – RB Size 25)**

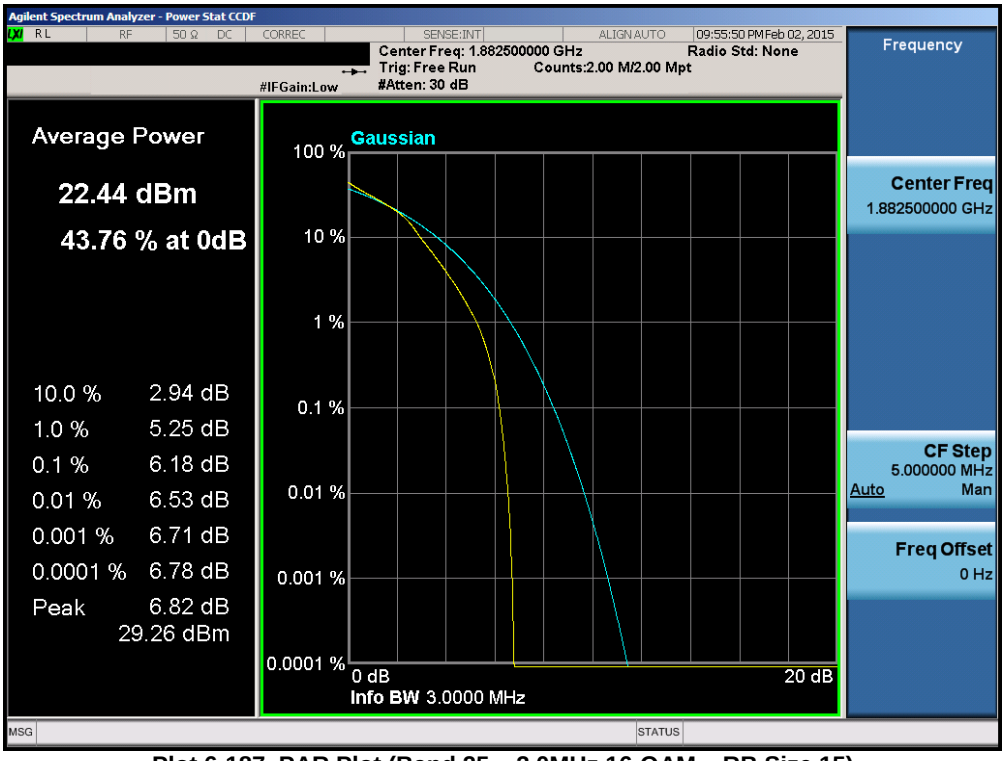


**Plot 6-189. PAR Plot (Band 25 – 5.0MHz 16-QAM – RB Size 25)**

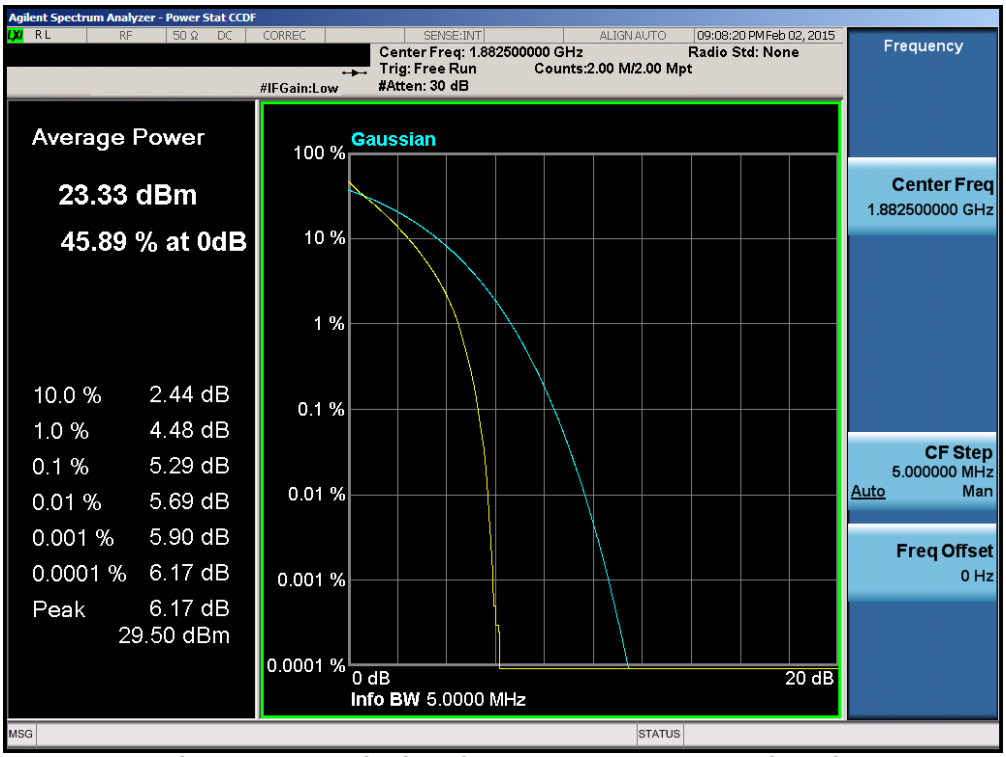


**Plot 6-190. PAR Plot (Band 25 – 10.0MHz QPSK – RB Size 50)**

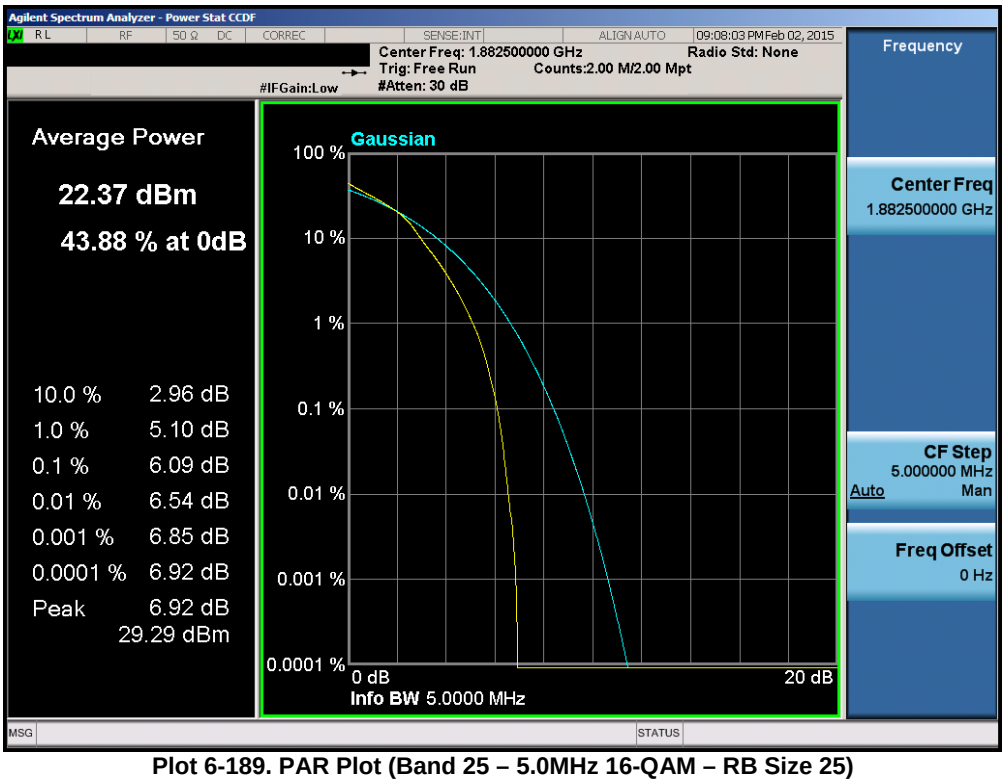


**Plot 6-191. PAR Plot (Band 25 – 10.0MHz 16-QAM – RB Size 50)**

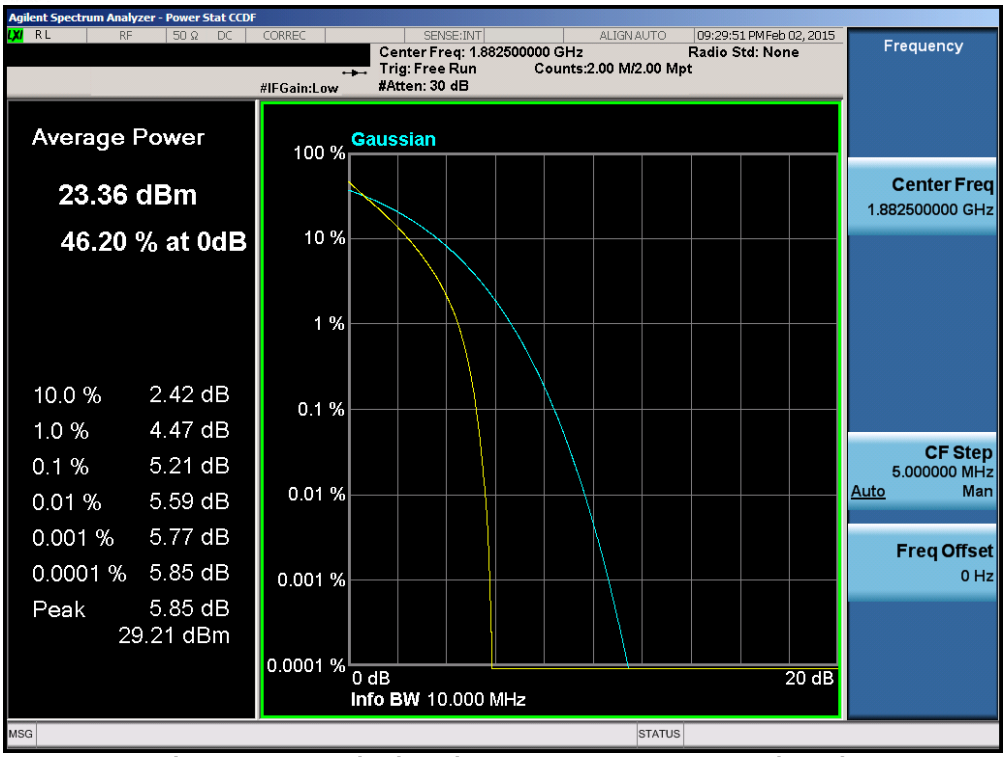


**Plot 6-192. PAR Plot (Band 25 – 15.0MHz QPSK – RB Size 75)**

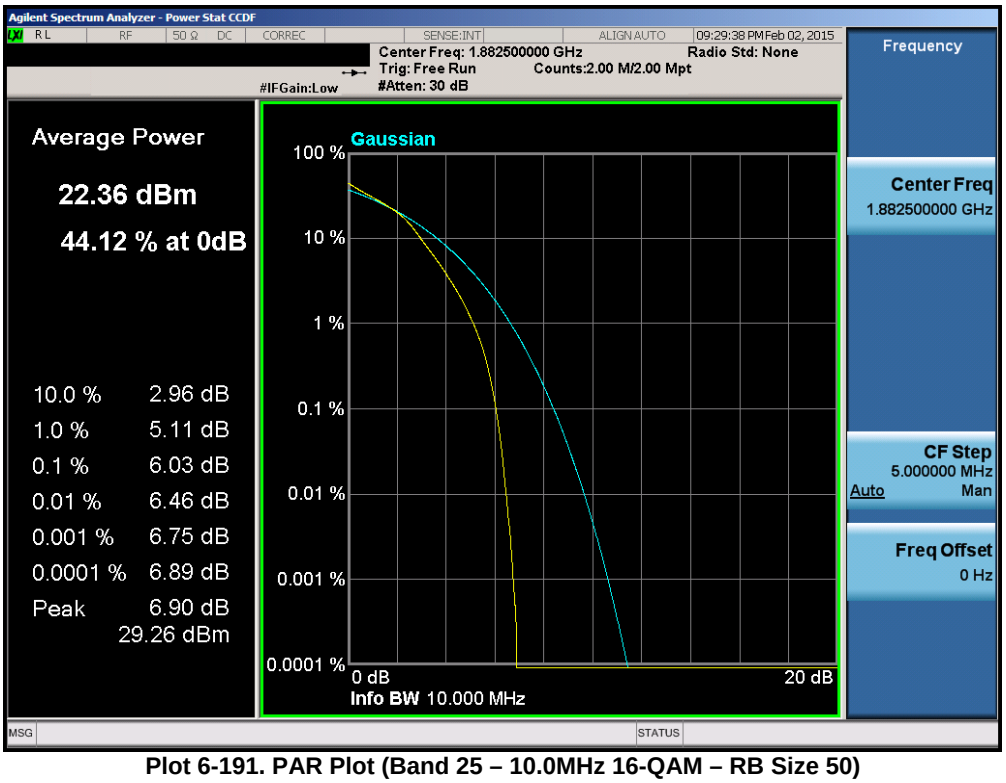


**Plot 6-193. PAR Plot (Band 25 – 15.0MHz 16-QAM – RB Size 75)**

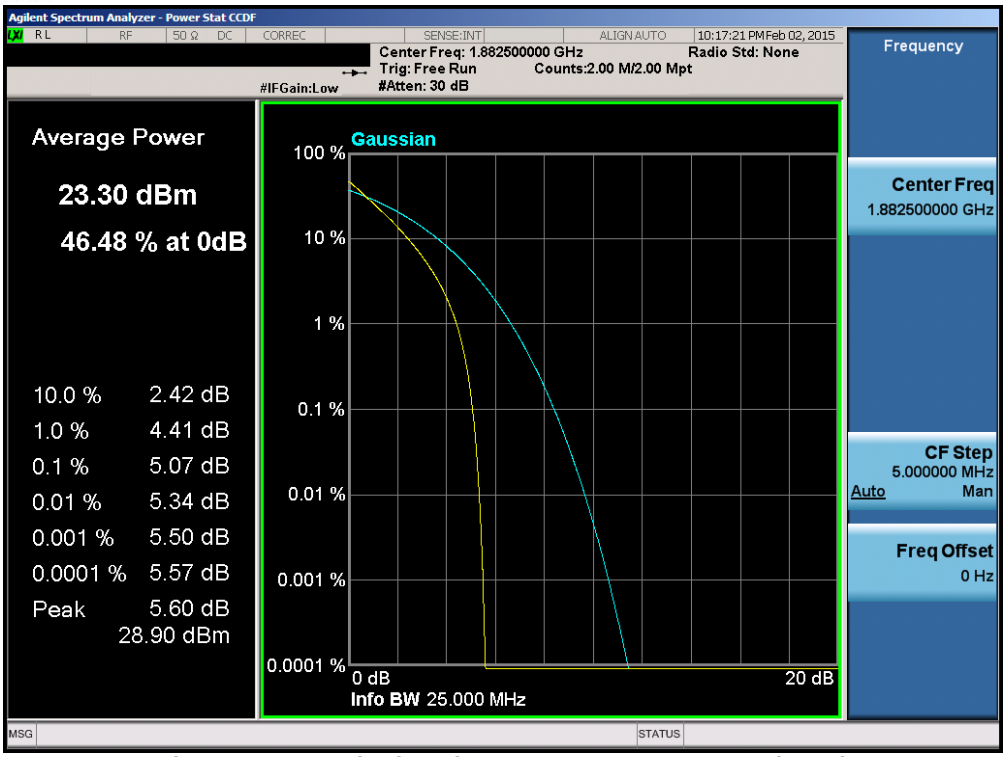


**Plot 6-194. PAR Plot (Band 25 – 20.0MHz QPSK – RB Size 100)**

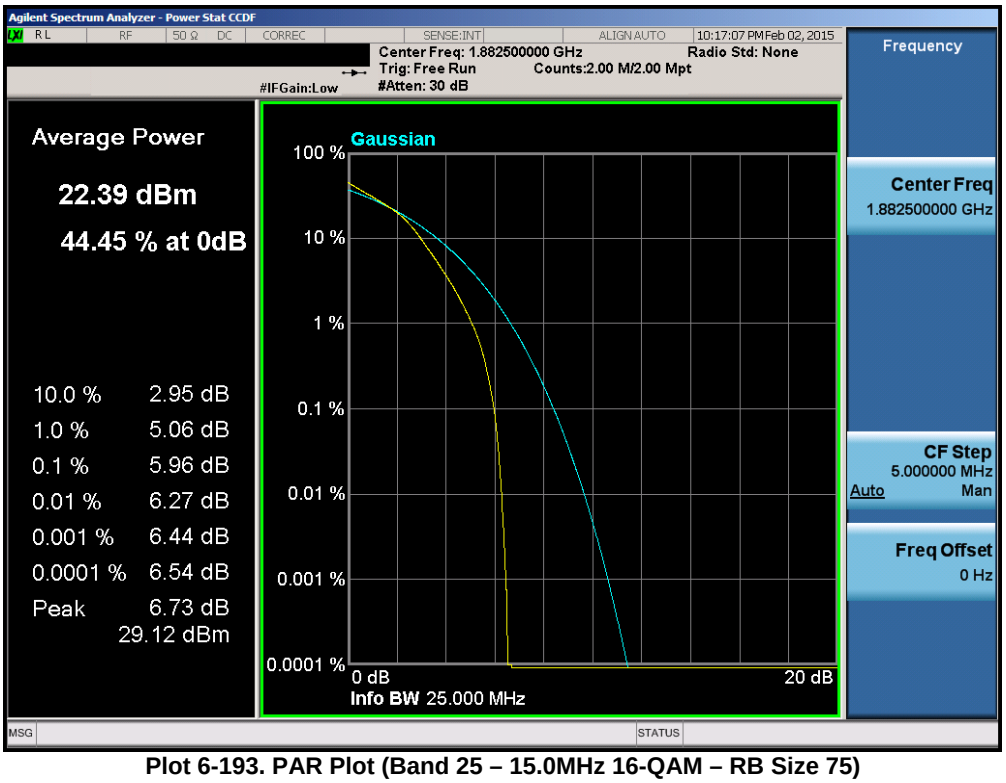


**Plot 6-195. PAR Plot (Band 25 – 20.0MHz 16-QAM – RB Size 100)**

## 6.6 Radiated Power (ERP/EIRP)

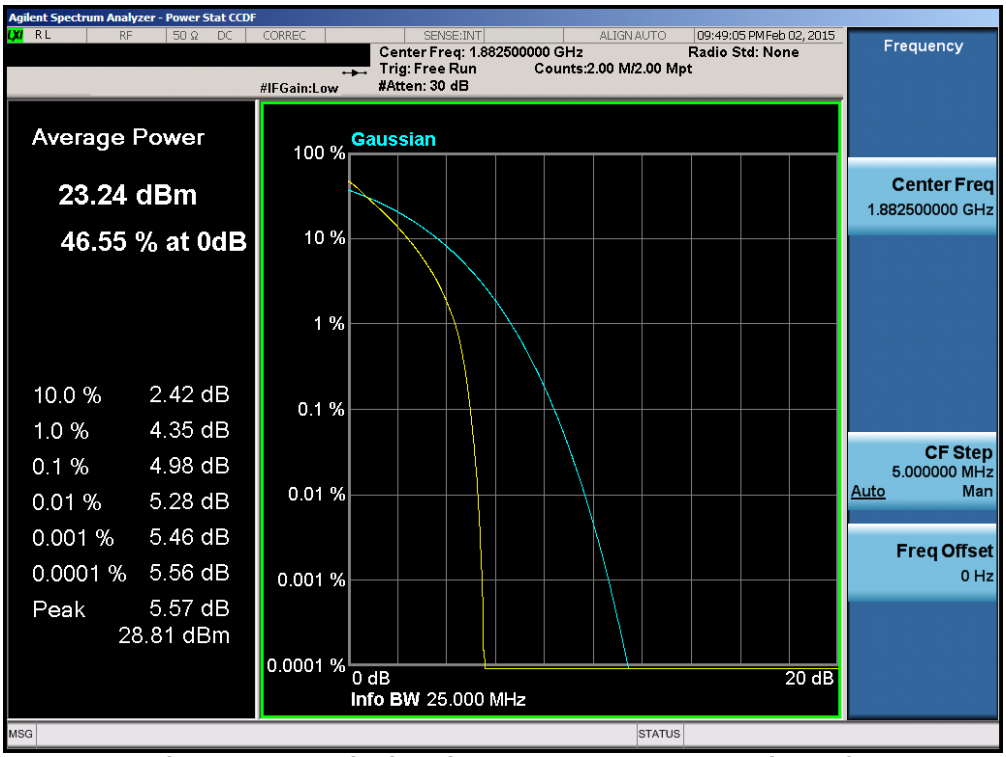**§22.913(a.2) §24.232(c.2) §27.50(h.2) §27.50(c.10) §27.50(d.4)**

### Test Overview

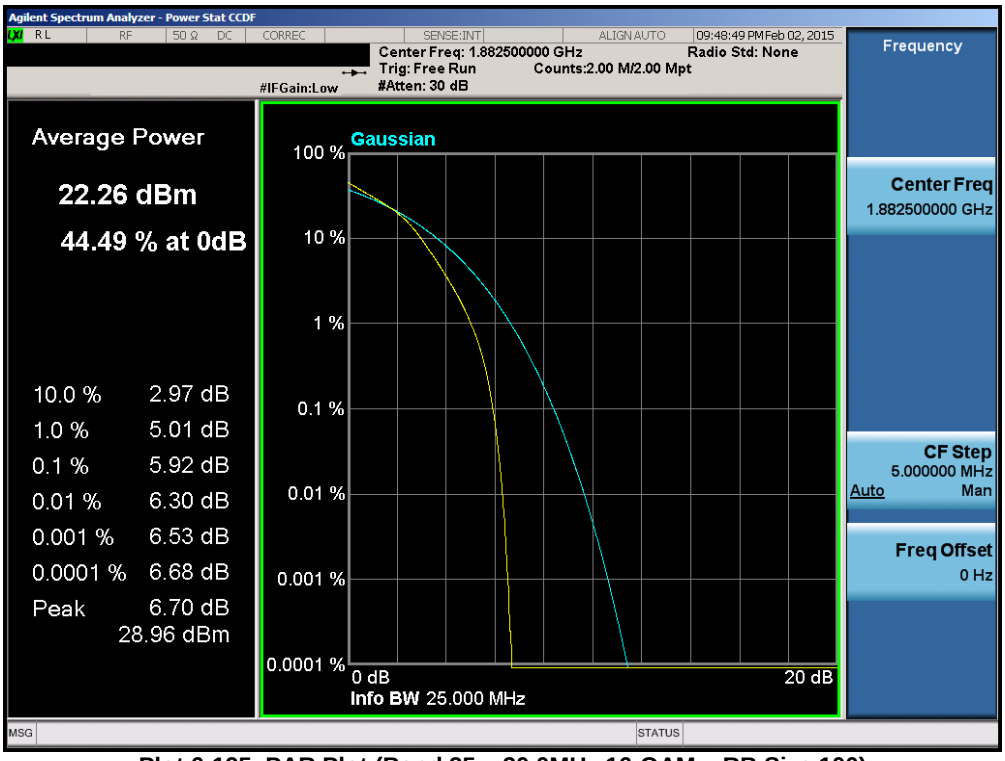Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

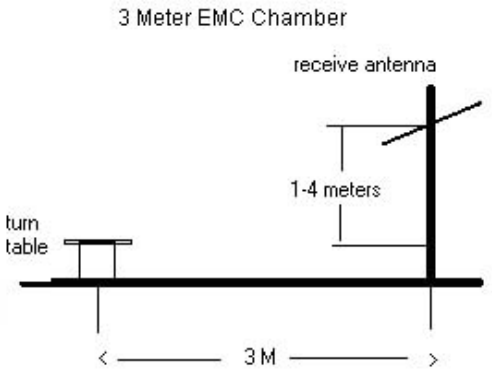


**Figure 6-5. Test Instrument & Measurement Setup**

## Test Notes

1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

2) This unit was tested with its standard battery.

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Battery Cover | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | Ant. Pol. [H/V] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|---|---|---|---|---|---|---|---|---|---|---|
| 699.70 | 1.4 | QPSK | Standard | 3 / 2 | 15.58 | 1.00 | V | 16.58 | 34.77 | -18.19 |
| 707.50 | 1.4 | QPSK | Standard | 3 / 2 | 17.94 | 1.07 | V | 19.01 | 34.77 | -15.76 |
| 715.30 | 1.4 | QPSK | Standard | 3 / 2 | 17.20 | 1.14 | V | 18.34 | 34.77 | -16.43 |
| 699.70 | 1.4 | 16-QAM | Standard | 3 / 2 | 14.57 | 1.00 | V | 15.57 | 34.77 | -19.20 |
| 707.50 | 1.4 | 16-QAM | Standard | 3 / 2 | 16.95 | 1.07 | V | 18.02 | 34.77 | -16.75 |
| 715.30 | 1.4 | 16-QAM | Standard | 3 / 2 | 16.08 | 1.14 | V | 17.22 | 34.77 | -17.55 |
| 700.50 | 3 | QPSK | Standard | 1 / 14 | 15.05 | 1.00 | V | 16.05 | 34.77 | -18.72 |
| 707.50 | 3 | QPSK | Standard | 1 / 14 | 16.31 | 1.07 | V | 17.38 | 34.77 | -17.39 |
| 714.50 | 3 | QPSK | Standard | 1 / 14 | 16.51 | 1.14 | V | 17.65 | 34.77 | -17.12 |
| 700.50 | 3 | 16-QAM | Standard | 1 / 14 | 14.12 | 1.00 | V | 15.12 | 34.77 | -19.65 |
| 707.50 | 3 | 16-QAM | Standard | 1 / 14 | 15.18 | 1.07 | V | 16.25 | 34.77 | -18.52 |
| 714.50 | 3 | 16-QAM | Standard | 1 / 14 | 15.35 | 1.14 | V | 16.49 | 34.77 | -18.28 |
| 701.50 | 5 | QPSK | Standard | 1 / 24 | 15.55 | 1.00 | V | 16.55 | 34.77 | -18.22 |
| 707.50 | 5 | QPSK | Standard | 1 / 24 | 16.38 | 1.07 | V | 17.45 | 34.77 | -17.32 |
| 713.50 | 5 | QPSK | Standard | 1 / 24 | 16.77 | 1.14 | V | 17.91 | 34.77 | -16.86 |
| 701.50 | 5 | 16-QAM | Standard | 1 / 24 | 14.67 | 1.00 | V | 15.67 | 34.77 | -19.10 |
| 707.50 | 5 | 16-QAM | Standard | 1 / 24 | 15.25 | 1.07 | V | 16.32 | 34.77 | -18.45 |
| 713.50 | 5 | 16-QAM | Standard | 1 / 24 | 15.49 | 1.14 | V | 16.63 | 34.77 | -18.14 |
| 704.00 | 10 | QPSK | Standard | 1 / 49 | 16.82 | 1.00 | V | 17.82 | 34.77 | -16.95 |
| 707.50 | 10 | QPSK | Standard | 1 / 49 | 16.91 | 1.07 | V | 17.98 | 34.77 | -16.79 |
| 711.00 | 10 | QPSK | Standard | 1 / 49 | 17.07 | 1.14 | V | 18.21 | 34.77 | -16.56 |
| 704.00 | 10 | 16-QAM | Standard | 1 / 49 | 15.77 | 1.00 | V | 16.76 | 34.77 | -18.01 |
| 707.50 | 10 | 16-QAM | Standard | 1 / 49 | 15.68 | 1.07 | V | 16.75 | 34.77 | -18.02 |
| 711.00 | 10 | 16-QAM | Standard | 1 / 49 | 16.19 | 1.14 | V | 17.33 | 34.77 | -17.44 |

**Table 6-2. ERP Data (Band 12)**

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Battery Cover | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | Ant. Pol. [H/V] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|---|---|---|---|---|---|---|---|---|---|---|
| 824.70 | 1.4 | QPSK | Standard | 1 / 5 | 15.25 | 3.01 | V | 18.26 | 38.451 | -20.20 |
| 836.50 | 1.4 | QPSK | Standard | 1 / 0 | 13.49 | 3.15 | V | 16.64 | 38.451 | -21.82 |
| 848.30 | 1.4 | QPSK | Standard | 1 / 0 | 11.78 | 3.28 | V | 15.06 | 38.451 | -23.39 |
| 824.70 | 1.4 | 16-QAM | Standard | 1 / 5 | 14.42 | 3.01 | V | 17.43 | 38.451 | -21.03 |
| 836.50 | 1.4 | 16-QAM | Standard | 1 / 0 | 12.62 | 3.15 | V | 15.77 | 38.451 | -22.69 |
| 848.30 | 1.4 | 16-QAM | Standard | 1 / 0 | 10.52 | 3.28 | V | 13.80 | 38.451 | -24.65 |
| 825.50 | 3 | QPSK | Standard | 1 / 0 | 15.02 | 3.02 | V | 18.04 | 38.451 | -20.42 |
| 836.50 | 3 | QPSK | Standard | 1 / 0 | 13.98 | 3.15 | V | 17.13 | 38.451 | -21.33 |
| 847.50 | 3 | QPSK | Standard | 1 / 0 | 13.21 | 3.27 | V | 16.48 | 38.451 | -21.97 |
| 825.50 | 3 | 16-QAM | Standard | 1 / 0 | 14.46 | 3.02 | V | 17.48 | 38.451 | -20.98 |
| 836.50 | 3 | 16-QAM | Standard | 1 / 0 | 13.18 | 3.15 | V | 16.33 | 38.451 | -22.13 |
| 847.50 | 3 | 16-QAM | Standard | 1 / 0 | 12.45 | 3.27 | V | 15.72 | 38.451 | -22.73 |
| 826.50 | 5 | QPSK | Standard | 1 / 0 | 14.80 | 3.03 | V | 17.83 | 38.451 | -20.62 |
| 836.50 | 5 | QPSK | Standard | 1 / 0 | 14.03 | 3.15 | V | 17.18 | 38.451 | -21.28 |
| 846.50 | 5 | QPSK | Standard | 1 / 0 | 13.82 | 3.26 | V | 17.08 | 38.451 | -21.37 |
| 826.50 | 5 | 16-QAM | Standard | 1 / 0 | 14.19 | 3.03 | V | 17.22 | 38.451 | -21.23 |
| 836.50 | 5 | 16-QAM | Standard | 1 / 0 | 13.27 | 3.15 | V | 16.42 | 38.451 | -22.04 |
| 846.50 | 5 | 16-QAM | Standard | 1 / 0 | 12.79 | 3.26 | V | 16.05 | 38.451 | -22.40 |
| 829.00 | 10 | QPSK | Standard | 1 / 0 | 15.20 | 3.06 | V | 18.26 | 38.451 | -20.19 |
| 836.50 | 10 | QPSK | Standard | 1 / 0 | 14.83 | 3.15 | V | 17.98 | 38.451 | -20.48 |
| 844.00 | 10 | QPSK | Standard | 1 / 0 | 12.36 | 3.23 | V | 15.59 | 38.451 | -22.86 |
| 829.00 | 10 | 16-QAM | Standard | 1 / 0 | 14.33 | 3.06 | V | 17.39 | 38.451 | -21.06 |
| 836.50 | 10 | 16-QAM | Standard | 1 / 0 | 14.41 | 3.15 | V | 17.56 | 38.451 | -20.90 |
| 844.00 | 10 | 16-QAM | Standard | 1 / 0 | 11.51 | 3.23 | V | 14.74 | 38.451 | -23.71 |
| 831.50 | 15 | QPSK | Standard | 1 / 0 | 15.16 | 3.09 | V | 18.25 | 38.451 | -20.20 |
| 836.50 | 15 | QPSK | Standard | 1 / 0 | 15.02 | 3.15 | V | 18.17 | 38.451 | -20.29 |
| 841.50 | 15 | QPSK | Standard | 1 / 0 | 14.08 | 3.20 | V | 17.28 | 38.451 | -21.17 |
| 831.50 | 15 | 16-QAM | Standard | 1 / 0 | 14.38 | 3.09 | V | 17.47 | 38.451 | -20.98 |
| 836.50 | 15 | 16-QAM | Standard | 1 / 0 | 14.58 | 3.15 | V | 17.73 | 38.451 | -20.73 |
| 841.50 | 15 | 16-QAM | Standard | 1 / 0 | 13.25 | 3.20 | V | 16.45 | 38.451 | -22.00 |

**Table 6-3. ERP Data (Band 26)**

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Battery Cover | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | Ant. Pol. [H/V] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|---|---|---|---|---|---|---|---|---|---|---|
| 1710.70 | 1.4 | QPSK | Standard | 1 / 0 | 14.80 | 9.28 | V | 24.08 | 30.000 | -5.92 |
| 1732.50 | 1.4 | QPSK | Standard | 1 / 0 | 12.37 | 9.00 | V | 21.37 | 30.000 | -8.63 |
| 1754.30 | 1.4 | QPSK | Standard | 1 / 0 | 14.15 | 8.72 | V | 22.87 | 30.000 | -7.13 |
| 1710.70 | 1.4 | 16-QAM | Standard | 1 / 0 | 14.13 | 9.28 | V | 23.41 | 30.000 | -6.59 |
| 1732.50 | 1.4 | 16-QAM | Standard | 1 / 0 | 11.38 | 9.00 | V | 20.38 | 30.000 | -9.62 |
| 1754.30 | 1.4 | 16-QAM | Standard | 1 / 0 | 13.36 | 8.72 | V | 22.08 | 30.000 | -7.92 |
| 1711.50 | 3 | QPSK | Standard | 1 / 0 | 14.79 | 9.27 | V | 24.06 | 30.000 | -5.94 |
| 1732.50 | 3 | QPSK | Standard | 1 / 0 | 12.42 | 9.00 | V | 21.42 | 30.000 | -8.58 |
| 1753.50 | 3 | QPSK | Standard | 1 / 0 | 14.10 | 8.73 | V | 22.83 | 30.000 | -7.17 |
| 1711.50 | 3 | 16-QAM | Standard | 1 / 0 | 14.13 | 9.27 | V | 23.40 | 30.000 | -6.60 |
| 1732.50 | 3 | 16-QAM | Standard | 1 / 0 | 11.46 | 9.00 | V | 20.46 | 30.000 | -9.54 |
| 1753.50 | 3 | 16-QAM | Standard | 1 / 0 | 13.30 | 8.73 | V | 22.03 | 30.000 | -7.97 |
| 1712.50 | 5 | QPSK | Standard | 1 / 0 | 14.93 | 9.26 | V | 24.19 | 30.000 | -5.81 |
| 1732.50 | 5 | QPSK | Standard | 1 / 0 | 12.57 | 9.00 | V | 21.57 | 30.000 | -8.43 |
| 1752.50 | 5 | QPSK | Standard | 1 / 0 | 14.29 | 8.74 | V | 23.03 | 30.000 | -6.97 |
| 1712.50 | 5 | 16-QAM | Standard | 1 / 0 | 14.33 | 9.26 | V | 23.59 | 30.000 | -6.41 |
| 1732.50 | 5 | 16-QAM | Standard | 1 / 0 | 11.77 | 9.00 | V | 20.77 | 30.000 | -9.23 |
| 1752.50 | 5 | 16-QAM | Standard | 1 / 0 | 13.46 | 8.74 | V | 22.20 | 30.000 | -7.80 |
| 1715.00 | 10 | QPSK | Standard | 1 / 0 | 14.89 | 9.22 | V | 24.11 | 30.000 | -5.89 |
| 1732.50 | 10 | QPSK | Standard | 1 / 0 | 14.21 | 9.00 | V | 23.21 | 30.000 | -6.79 |
| 1750.00 | 10 | QPSK | Standard | 1 / 0 | 14.34 | 8.77 | V | 23.11 | 30.000 | -6.89 |
| 1715.00 | 10 | 16-QAM | Standard | 1 / 0 | 13.64 | 9.22 | V | 22.86 | 30.000 | -7.14 |
| 1732.50 | 10 | 16-QAM | Standard | 1 / 0 | 13.84 | 9.00 | V | 22.84 | 30.000 | -7.16 |
| 1750.00 | 10 | 16-QAM | Standard | 1 / 0 | 13.66 | 8.77 | V | 22.43 | 30.000 | -7.57 |
| 1717.50 | 15 | QPSK | Standard | 1 / 0 | 14.82 | 9.19 | V | 24.01 | 30.000 | -5.99 |
| 1732.50 | 15 | QPSK | Standard | 1 / 0 | 14.10 | 9.00 | V | 23.10 | 30.000 | -6.90 |
| 1747.50 | 15 | QPSK | Standard | 1 / 0 | 14.24 | 8.80 | V | 23.04 | 30.000 | -6.96 |
| 1717.50 | 15 | 16-QAM | Standard | 1 / 0 | 13.58 | 9.19 | V | 22.77 | 30.000 | -7.23 |
| 1732.50 | 15 | 16-QAM | Standard | 1 / 0 | 13.70 | 9.00 | V | 22.70 | 30.000 | -7.30 |
| 1747.50 | 15 | 16-QAM | Standard | 1 / 0 | 13.48 | 8.80 | V | 22.28 | 30.000 | -7.72 |
| 1720.00 | 20 | QPSK | Standard | 1 / 0 | 13.71 | 9.16 | V | 22.87 | 30.000 | -7.13 |
| 1732.50 | 20 | QPSK | Standard | 1 / 0 | 14.17 | 9.00 | V | 23.17 | 30.000 | -6.83 |
| 1745.00 | 20 | QPSK | Standard | 1 / 0 | 15.09 | 8.83 | V | 23.92 | 30.000 | -6.08 |
| 1720.00 | 20 | 16-QAM | Standard | 1 / 0 | 13.59 | 9.16 | V | 22.75 | 30.000 | -7.25 |
| 1732.50 | 20 | 16-QAM | Standard | 1 / 0 | 13.25 | 9.00 | V | 22.25 | 30.000 | -7.75 |
| 1745.00 | 20 | 16-QAM | Standard | 1 / 0 | 13.98 | 8.83 | V | 22.81 | 30.000 | -7.19 |

**Table 6-4. EIRP Data (Band 4)**

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Battery Cover | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | Ant. Pol. [H/V] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|---|---|---|---|---|---|---|---|---|---|---|
| 1850.70 | 1.4 | QPSK | Standard | 6 / 0 | 13.88 | 9.38 | V | 23.26 | 33.010 | -9.75 |
| 1882.50 | 1.4 | QPSK | Standard | 6 / 0 | 13.81 | 9.33 | V | 23.14 | 33.010 | -9.87 |
| 1914.30 | 1.4 | QPSK | Standard | 6 / 0 | 12.41 | 9.28 | V | 21.69 | 33.010 | -11.32 |
| 1850.70 | 1.4 | 16-QAM | Standard | 6 / 0 | 13.02 | 9.38 | V | 22.40 | 33.010 | -10.61 |
| 1882.50 | 1.4 | 16-QAM | Standard | 6 / 0 | 12.85 | 9.33 | V | 22.18 | 33.010 | -10.83 |
| 1914.30 | 1.4 | 16-QAM | Standard | 6 / 0 | 11.36 | 9.28 | V | 20.64 | 33.010 | -12.37 |
| 1851.50 | 3 | QPSK | Standard | 8 / 4 | 13.62 | 9.38 | V | 23.00 | 33.010 | -10.01 |
| 1882.50 | 3 | QPSK | Standard | 8 / 4 | 11.20 | 9.33 | V | 20.53 | 33.010 | -12.48 |
| 1913.50 | 3 | QPSK | Standard | 1 / 14 | 14.00 | 9.28 | V | 23.28 | 33.010 | -9.73 |
| 1851.50 | 3 | 16-QAM | Standard | 8 / 4 | 12.77 | 9.38 | V | 22.15 | 33.010 | -10.86 |
| 1882.50 | 3 | 16-QAM | Standard | 8 / 4 | 10.30 | 9.33 | V | 19.63 | 33.010 | -13.38 |
| 1913.50 | 3 | 16-QAM | Standard | 1 / 14 | 13.26 | 9.28 | V | 22.54 | 33.010 | -10.47 |
| 1852.50 | 5 | QPSK | Standard | 12 / 6 | 11.77 | 9.38 | V | 21.15 | 33.010 | -11.86 |
| 1882.50 | 5 | QPSK | Standard | 12 / 6 | 11.15 | 9.33 | V | 20.48 | 33.010 | -12.53 |
| 1912.50 | 5 | QPSK | Standard | 25 / 0 | 10.80 | 9.29 | V | 20.09 | 33.010 | -12.93 |
| 1852.50 | 5 | 16-QAM | Standard | 12 / 6 | 10.75 | 9.38 | V | 20.13 | 33.010 | -12.88 |
| 1882.50 | 5 | 16-QAM | Standard | 1 / 0 | 11.15 | 9.33 | V | 20.48 | 33.010 | -12.53 |
| 1912.50 | 5 | 16-QAM | Standard | 25 / 0 | 9.83 | 9.29 | V | 19.12 | 33.010 | -13.90 |
| 1855.00 | 10 | QPSK | Standard | 50 / 0 | 13.22 | 9.37 | V | 22.59 | 33.010 | -10.42 |
| 1882.50 | 10 | QPSK | Standard | 1 / 0 | 12.82 | 9.33 | V | 22.15 | 33.010 | -10.86 |
| 1910.00 | 10 | QPSK | Standard | 1 / 49 | 12.62 | 9.29 | V | 21.91 | 33.010 | -11.10 |
| 1855.00 | 10 | 16-QAM | Standard | 25 / 12 | 12.20 | 9.37 | V | 21.57 | 33.010 | -11.44 |
| 1882.50 | 10 | 16-QAM | Standard | 1 / 0 | 12.52 | 9.33 | V | 21.85 | 33.010 | -11.16 |
| 1910.00 | 10 | 16-QAM | Standard | 1 / 49 | 12.37 | 9.29 | V | 21.66 | 33.010 | -11.35 |
| 1857.50 | 15 | QPSK | Standard | 1 / 74 | 13.46 | 9.37 | V | 22.83 | 33.010 | -10.18 |
| 1882.50 | 15 | QPSK | Standard | 36 / 18 | 12.77 | 9.33 | V | 22.10 | 33.010 | -10.91 |
| 1907.50 | 15 | QPSK | Standard | 1 / 0 | 12.16 | 9.29 | V | 21.45 | 33.010 | -11.56 |
| 1857.50 | 15 | 16-QAM | Standard | 1 / 74 | 13.87 | 9.37 | V | 23.24 | 33.010 | -9.77 |
| 1882.50 | 15 | 16-QAM | Standard | 36 / 18 | 11.74 | 9.33 | V | 21.07 | 33.010 | -11.94 |
| 1907.50 | 15 | 16-QAM | Standard | 1 / 0 | 12.46 | 9.29 | V | 21.75 | 33.010 | -11.26 |
| 1860.00 | 20 | QPSK | Standard | 1 / 0 | 11.78 | 9.37 | V | 21.15 | 33.010 | -11.86 |
| 1882.50 | 20 | QPSK | Standard | 1 / 0 | 11.78 | 9.33 | V | 21.11 | 33.010 | -11.90 |
| 1905.00 | 20 | QPSK | Standard | 1 / 0 | 12.35 | 9.29 | V | 21.64 | 33.010 | -11.37 |
| 1860.00 | 20 | 16-QAM | Standard | 1 / 0 | 12.21 | 9.37 | V | 21.58 | 33.010 | -11.43 |
| 1882.50 | 20 | 16-QAM | Standard | 1 / 0 | 11.74 | 9.33 | V | 21.07 | 33.010 | -11.94 |
| 1905.00 | 20 | 16-QAM | Standard | 1 / 0 | 12.03 | 9.29 | V | 21.32 | 33.010 | -11.69 |

**Table 6-5. EIRP Data (Band 25)**

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Battery Cover | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | Ant. Pol. [H/V] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|---|---|---|---|---|---|---|---|---|---|---|
| 2498.50 | 5 | QPSK | Standard | 1 / 0 | 4.78 | 7.09 | V | 11.87 | 33.010 | -21.14 |
| 2593.00 | 5 | QPSK | Standard | 1 / 24 | 6.96 | 7.55 | V | 14.51 | 33.010 | -18.50 |
| 2687.50 | 5 | QPSK | Standard | 1 / 0 | 8.85 | 7.82 | V | 16.67 | 33.010 | -16.34 |
| 2498.50 | 5 | 16-QAM | Standard | 1 / 0 | 4.20 | 7.09 | V | 11.29 | 33.010 | -21.72 |
| 2593.00 | 5 | 16-QAM | Standard | 1 / 24 | 6.77 | 7.55 | V | 14.32 | 33.010 | -18.69 |
| 2687.50 | 5 | 16-QAM | Standard | 1 / 0 | 8.20 | 7.82 | V | 16.02 | 33.010 | -16.99 |
| 2501.00 | 10 | QPSK | Standard | 1 / 49 | 5.33 | 7.08 | V | 12.41 | 33.010 | -20.60 |
| 2593.00 | 10 | QPSK | Standard | 1 / 49 | 8.78 | 7.55 | V | 16.33 | 33.010 | -16.68 |
| 2685.00 | 10 | QPSK | Standard | 1 / 0 | 8.70 | 7.81 | V | 16.51 | 33.010 | -16.50 |
| 2501.00 | 10 | 16-QAM | Standard | 1 / 49 | 4.41 | 7.08 | V | 11.49 | 33.010 | -21.52 |
| 2593.00 | 10 | 16-QAM | Standard | 1 / 49 | 8.49 | 7.55 | V | 16.04 | 33.010 | -16.97 |
| 2685.00 | 10 | 16-QAM | Standard | 1 / 0 | 7.93 | 7.81 | V | 15.74 | 33.010 | -17.27 |
| 2503.50 | 15 | QPSK | Standard | 1 / 74 | 5.90 | 7.10 | V | 13.00 | 33.010 | -20.01 |
| 2593.00 | 15 | QPSK | Standard | 1 / 74 | 8.03 | 7.55 | V | 15.58 | 33.010 | -17.43 |
| 2682.50 | 15 | QPSK | Standard | 1 / 0 | 10.47 | 7.81 | V | 18.28 | 33.010 | -14.73 |
| 2503.50 | 15 | 16-QAM | Standard | 1 / 74 | 4.81 | 7.10 | V | 11.91 | 33.010 | -21.10 |
| 2593.00 | 15 | 16-QAM | Standard | 1 / 74 | 7.69 | 7.55 | V | 15.24 | 33.010 | -17.77 |
| 2682.50 | 15 | 16-QAM | Standard | 1 / 0 | 9.57 | 7.81 | V | 17.38 | 33.010 | -15.63 |
| 2506.00 | 20 | QPSK | Standard | 1 / 0 | 4.11 | 7.11 | V | 11.22 | 33.010 | -21.79 |
| 2593.00 | 20 | QPSK | Standard | 1 / 99 | 8.54 | 7.55 | V | 16.09 | 33.010 | -16.92 |
| 2680.00 | 20 | QPSK | Standard | 1 / 99 | 11.64 | 7.80 | V | 19.44 | 33.010 | -13.57 |
| 2506.00 | 20 | 16-QAM | Standard | 1 / 0 | 3.59 | 7.11 | V | 10.70 | 33.010 | -22.31 |
| 2593.00 | 20 | 16-QAM | Standard | 1 / 99 | 8.28 | 7.55 | V | 15.83 | 33.010 | -17.18 |
| 2680.00 | 20 | 16-QAM | Standard | 1 / 99 | 11.11 | 7.80 | V | 18.91 | 33.010 | -14.10 |

**Table 6-6. EIRP Data (Band 41)**

## 6.7 Radiated Spurious Emissions Measurements

**§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(m)**

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points ≥ 2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

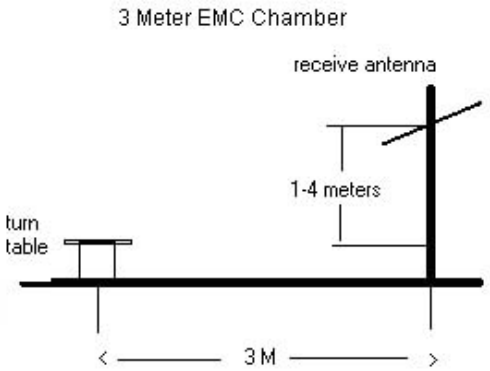


**Figure 6-6. Test Instrument & Measurement Setup**

## Test Notes

1) The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

2) This unit was tested with its standard battery.

3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.

4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 699.70 | MHz | | |
| CHANNEL: | 23017 | | | |
| MEASURED OUTPUT POWER: | 16.58 | dBm | = | 0.045 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 1.4 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 29.58 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1399.40 | -48.72 | 2.50 | -46.22 | V | 62.8 |
| 2099.10 | -50.73 | 2.98 | -47.75 | V | 64.3 |
| 2798.80 | -42.04 | 4.72 | -37.31 | V | 53.9 |
| 3498.50 | -55.54 | 6.27 | -49.27 | V | 65.8 |
| 4198.20 | -56.53 | 7.11 | -49.41 | V | 66.0 |
| 4897.90 | -60.05 | 7.84 | -52.21 | V | 68.8 |
| 5597.60 | -61.34 | 8.54 | -52.80 | V | 69.4 |
| 6297.30 | -59.36 | 8.68 | -50.68 | V | 67.3 |
| 6997.00 | -43.82 | 9.45 | -34.37 | V | 50.9 |

**Table 6-7. Radiated Spurious Data (Band 12 – Low Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 707.50 | MHz | | |
| CHANNEL: | 23095 | | | |
| MEASURED OUTPUT POWER: | 19.01 | dBm | = | 0.080 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 1.4 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 32.01 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1415.00 | -42.89 | 2.57 | -40.32 | V | 59.3 |
| 2122.50 | -51.78 | 3.02 | -48.76 | V | 67.8 |
| 2830.00 | -51.71 | 4.72 | -46.99 | V | 66.0 |
| 3537.50 | -63.44 | 6.29 | -57.15 | V | 76.2 |
| 4245.00 | -62.73 | 7.14 | -55.59 | V | 74.6 |
| 4952.50 | -63.50 | 7.89 | -55.61 | V | 74.6 |
| 5660.00 | -63.75 | 8.57 | -55.18 | V | 74.2 |
| 6367.50 | -63.21 | 8.70 | -54.51 | V | 73.5 |
| 7075.00 | -55.94 | 9.50 | -46.44 | V | 65.4 |

**Table 6-8. Radiated Spurious Data (Band 12 – Mid Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 715.30 | MHz | | |
| CHANNEL: | 23173 | | | |
| MEASURED OUTPUT POWER: | 18.34 | dBm | = | 0.068 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 1.4 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 31.34 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1430.60 | -42.62 | 2.65 | -39.96 | V | 58.3 |
| 2145.90 | -50.06 | 3.05 | -47.01 | V | 65.4 |
| 2861.20 | -46.25 | 4.71 | -41.54 | V | 59.9 |
| 3576.50 | -62.28 | 6.30 | -55.97 | V | 74.3 |
| 4291.80 | -61.04 | 7.16 | -53.87 | V | 72.2 |
| 5007.10 | -63.48 | 7.95 | -55.53 | V | 73.9 |
| 5722.40 | -62.25 | 8.59 | -53.66 | V | 72.0 |
| 6437.70 | -60.10 | 8.72 | -51.39 | V | 69.7 |
| 7153.00 | -56.92 | 9.55 | -47.37 | V | 65.7 |

**Table 6-9. Radiated Spurious Data (Band 12 – High Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 707.50 | MHz | | |
| CHANNEL: | 23095 | | | |
| MEASURED OUTPUT POWER: | 19.01 | dBm | = | 0.080 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 5.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 32.01 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1415.00 | -50.43 | 2.57 | -47.86 | H | 66.9 |
| 2122.50 | -49.91 | 3.02 | -46.89 | H | 65.9 |
| 2830.00 | -55.47 | 4.72 | -50.75 | H | 69.8 |
| 3537.50 | -56.69 | 6.29 | -50.40 | H | 69.4 |
| 4245.00 | -61.99 | 7.14 | -54.85 | H | 73.9 |
| 4952.50 | -61.24 | 7.89 | -53.35 | H | 72.4 |
| 5660.00 | -63.62 | 8.57 | -55.05 | H | 74.1 |
| 6367.50 | -60.32 | 8.70 | -51.62 | H | 70.6 |
| 7075.00 | -63.43 | 9.50 | -53.93 | H | 72.9 |

**Table 6-10. Radiated Spurious Data with WCP (Band 12 - Mid Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 829.00 | MHz | | |
| CHANNEL: | 26840 | | | |
| MEASURED OUTPUT POWER: | 18.26 | dBm | = | 0.067 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 10.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 31.26 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1658.00 | -64.26 | 6.56 | -57.70 | H | 76.0 |
| 2487.00 | -53.99 | 7.32 | -46.68 | H | 64.9 |
| 3316.00 | -64.96 | 7.39 | -57.57 | H | 75.8 |

**Table 6-11. Radiated Spurious Data (Band 26 – Low Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 836.50 | MHz | | | |
| CHANNEL: | 26915 | | | | |
| MEASURED OUTPUT POWER: | 17.98 | dBm | = | 0.063 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 10.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 30.98 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1673.00 | -63.68 | 6.55 | -57.13 | H | 75.1 |
| 2509.50 | -54.84 | 7.34 | -47.49 | H | 65.5 |
| 3346.00 | -64.71 | 7.44 | -57.27 | H | 75.2 |

**Table 6-12. Radiated Spurious Data (Band 26 – Mid Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 844.00 | MHz | | | |
| CHANNEL: | 26990 | | | | |
| MEASURED OUTPUT POWER: | 15.59 | dBm | = | 0.036 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 10.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 28.59 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1688.00 | -64.58 | 6.55 | -58.03 | H | 73.6 |
| 2532.00 | -59.48 | 7.35 | -52.13 | H | 67.7 |
| 3376.00 | -64.92 | 7.48 | -57.44 | H | 73.0 |

**Table 6-13. Radiated Spurious Data (Band 26 – High Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 829.00 | MHz | | | |
| CHANNEL: | 26840 | | | | |
| MEASURED OUTPUT POWER: | 16.15 | dBm | = | 0.041 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 10.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 29.15 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 1658.00 | -48.42 | 6.56 | -41.86 | H | 58.0 |
| 2487.00 | -56.53 | 7.32 | -49.22 | H | 65.4 |
| 3316.00 | -63.82 | 7.39 | -56.43 | H | 72.6 |
| 4145.00 | -62.09 | 8.09 | -54.01 | H | 70.2 |
| 4974.00 | -62.50 | 8.76 | -53.74 | H | 69.9 |

**Table 6-14. Radiated Spurious Data with WCP (Band 26 - Low Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 1712.50 | MHz | | | |
| CHANNEL: | 19975 | | | | |
| MEASURED OUTPUT POWER: | 24.19 | dBm | = | 0.262 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 5.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 37.19 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3425.00 | -54.96 | 9.70 | -45.26 | V | 69.4 |
| 5137.50 | -55.62 | 10.68 | -44.94 | V | 69.1 |
| 6850.00 | -57.23 | 11.75 | -45.48 | V | 69.7 |
| 8562.50 | -51.00 | 11.05 | -39.95 | V | 64.1 |
| 10275.00 | -56.00 | 12.28 | -43.73 | V | 67.9 |
| 11987.50 | -52.61 | 12.46 | -40.16 | V | 64.3 |

**Table 6-15. Radiated Spurious Data (Band 4 – Low Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 1732.50 | MHz | | |
| CHANNEL: | 20175 | | | |
| MEASURED OUTPUT POWER: | 21.57 | dBm | = | 0.143 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 5.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 34.57 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3465.00 | -60.95 | 9.72 | -51.23 | V | 72.8 |
| 5197.50 | -54.18 | 10.60 | -43.58 | V | 65.1 |
| 6930.00 | -58.39 | 11.76 | -46.63 | V | 68.2 |
| 8662.50 | -54.54 | 11.05 | -43.49 | V | 65.1 |
| 10395.00 | -54.25 | 12.40 | -41.85 | V | 63.4 |
| 12127.50 | -54.64 | 12.81 | -41.83 | V | 63.4 |

**Table 6-16. Radiated Spurious Data (Band 4 – Mid Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 1752.50 | MHz | | |
| CHANNEL: | 20375 | | | |
| MEASURED OUTPUT POWER: | 23.03 | dBm | = | 0.201 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 5.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 36.03 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3505.00 | -55.43 | 9.73 | -45.70 | V | 68.7 |
| 5257.50 | -51.87 | 10.65 | -41.22 | V | 64.3 |
| 7010.00 | -59.01 | 11.77 | -47.25 | V | 70.3 |
| 8762.50 | -52.87 | 11.00 | -41.87 | V | 64.9 |
| 10515.00 | -50.65 | 12.49 | -38.16 | V | 61.2 |
| 12267.50 | -50.16 | 13.05 | -37.10 | V | 60.1 |

**Table 6-17. Radiated Spurious Data (Band 4 – High Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 1752.50 | MHz | | |
| CHANNEL: | 20375 | | | |
| MEASURED OUTPUT POWER: | 23.03 | dBm | = | 0.201 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 5.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 36.03 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3505.00 | -57.96 | 9.73 | -48.23 | H | 71.3 |
| 5257.50 | -53.82 | 10.65 | -43.17 | H | 66.2 |
| 7010.00 | -58.69 | 11.77 | -46.93 | H | 70.0 |
| 8762.50 | -53.69 | 11.00 | -42.69 | H | 65.7 |
| 10515.00 | -52.28 | 12.49 | -39.79 | H | 62.8 |
| 12267.50 | -51.48 | 13.05 | -38.42 | H | 61.5 |

**Table 6-18. Radiated Spurious Data with WCP (Band 4 – High Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 1851.50 | MHz | | |
| CHANNEL: | 26055 | | | |
| MEASURED OUTPUT POWER: | 23.00 | dBm | = | 0.200 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 3.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 36.00 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3703.00 | -60.71 | 9.43 | -51.28 | H | 74.3 |
| 5554.50 | -60.24 | 10.79 | -49.44 | H | 72.4 |
| 7406.00 | -54.14 | 10.70 | -43.44 | H | 66.4 |
| 9257.50 | -56.21 | 11.58 | -44.63 | H | 67.6 |
| 11109.00 | -58.06 | 12.79 | -45.27 | H | 68.3 |

**Table 6-19. Radiated Spurious Data (Band 25 – Low Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 1882.50 | MHz | | | |
| CHANNEL: | 26365 | | | | |
| MEASURED OUTPUT POWER: | 20.53 | dBm | = | 0.113 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 3.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 33.53 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3765.00 | -57.78 | 9.27 | -48.51 | H | 69.0 |
| 5647.50 | -60.65 | 11.06 | -49.59 | H | 70.1 |
| 7530.00 | -56.74 | 10.99 | -45.74 | H | 66.3 |
| 9412.50 | -57.48 | 11.55 | -45.93 | H | 66.5 |

**Table 6-20. Radiated Spurious Data (Band 25 – Mid Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 1913.50 | MHz | | | |
| CHANNEL: | 26675 | | | | |
| MEASURED OUTPUT POWER: | 23.28 | dBm | = | 0.213 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 3.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 36.28 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3827.00 | -60.01 | 9.20 | -50.81 | H | 74.1 |
| 5740.50 | -60.64 | 11.30 | -49.34 | H | 72.6 |
| 7654.00 | -54.56 | 11.19 | -43.38 | H | 66.7 |
| 9567.50 | -57.46 | 11.89 | -45.57 | H | 68.9 |

**Table 6-21. Radiated Spurious Data (Band 25 – High Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 1913.50 | MHz | | |
| CHANNEL: | 26675 | | | |
| MEASURED OUTPUT POWER: | 23.28 | dBm | = | 0.213 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 3.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 43 + 10 $\log_{10}$ (W) = | 36.28 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 3827.00 | -55.79 | 9.20 | -46.59 | H | 69.9 |
| 5740.50 | -57.01 | 11.30 | -45.71 | H | 69.0 |
| 7654.00 | -55.97 | 11.19 | -44.79 | H | 68.1 |
| 9567.50 | -57.45 | 11.89 | -45.56 | H | 68.8 |
| 11481.00 | -56.98 | 12.70 | -44.28 | H | 67.6 |

**Table 6-22. Radiated Spurious Data with WCP (Band 25 - High Channel)**

| | | | | |
|---|---|---|---|---|
| OPERATING FREQUENCY: | 2506.00 | MHz | | |
| CHANNEL: | 39750 | | | |
| MEASURED OUTPUT POWER: | 11.22 | dBm | = | 0.013 W |
| MODULATION SIGNAL: | QPSK | | | |
| BANDWIDTH: | 20.0 | MHz | | |
| DISTANCE: | 3 | meters | | |
| LIMIT: | 55 + 10 log10 (W) = | 36.22 | dBc | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 5012.00 | -51.77 | 10.91 | -40.87 | H | 52.1 |
| 7518.00 | -50.31 | 10.97 | -39.34 | H | 50.6 |
| 10024.00 | -56.73 | 12.04 | -44.68 | H | 55.9 |
| 12530.00 | -51.78 | 13.46 | -38.32 | H | 49.5 |
| 15036.00 | -55.97 | 13.48 | -42.49 | H | 53.7 |
| 17542.00 | -49.33 | 11.65 | -37.68 | H | 48.9 |

**Table 6-23. Radiated Spurious Data (Band 41 – Low Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 2593.00 | MHz | | | |
| CHANNEL: | 40620 | | | | |
| MEASURED OUTPUT POWER: | 16.09 | dBm | = | 0.041 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 20.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 55 + 10 log10 (W) = | 41.09 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 5186.00 | -49.76 | 10.60 | -39.16 | H | 55.2 |
| 7779.00 | -46.64 | 11.22 | -35.42 | H | 51.5 |
| 10372.00 | -52.95 | 12.36 | -40.59 | H | 56.7 |
| 12965.00 | -46.80 | 13.16 | -33.64 | H | 49.7 |
| 15558.00 | -61.09 | 16.15 | -44.94 | H | 61.0 |

**Table 6-24. Radiated Spurious Data (Band 41 – Mid Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 2680.00 | MHz | | | |
| CHANNEL: | 41490 | | | | |
| MEASURED OUTPUT POWER: | 19.44 | dBm | = | 0.088 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 20.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 55 + 10 log10 (W) = | 44.44 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 5360.00 | -45.43 | 10.60 | -34.83 | H | 54.3 |
| 8040.00 | -48.06 | 11.10 | -36.96 | H | 56.4 |
| 10720.00 | -55.32 | 12.55 | -42.77 | H | 62.2 |
| 13400.00 | -50.52 | 12.42 | -38.10 | H | 57.5 |
| 16080.00 | -59.49 | 16.66 | -42.84 | H | 62.3 |

**Table 6-25. Radiated Spurious Data (Band 41 – High Channel)**

| | | | | | |
|---|---|---|---|---|---|
| OPERATING FREQUENCY: | 2680.00 | MHz | | | |
| CHANNEL: | 41490 | | | | |
| MEASURED OUTPUT POWER: | 19.44 | dBm | = | 0.088 | W |
| MODULATION SIGNAL: | QPSK | | | | |
| BANDWIDTH: | 20.0 | MHz | | | |
| DISTANCE: | 3 | meters | | | |
| LIMIT: | 55 + 10 log10 (W) = | 44.44 | dBc | | |

| Frequency [MHz] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Ant. Pol. [H/V] | [dBc] |
|---|---|---|---|---|---|
| 5360.00 | -50.34 | 10.60 | -39.74 | H | 59.2 |
| 8040.00 | -49.30 | 11.10 | -38.20 | H | 57.6 |
| 10720.00 | -55.48 | 12.55 | -42.93 | H | 62.4 |
| 13400.00 | -52.85 | 12.42 | -40.43 | H | 59.9 |
| 16080.00 | -59.39 | 16.66 | -42.74 | H | 62.2 |

**Table 6-26. Radiated Spurious Data with WCP (Band 41– High Channel)**

## 6.8 Frequency Stability / Temperature Variation

**§2.1055 §22.355 §24.235 §27.54**

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

## Band 12 Frequency Stability Measurements

**§2.1055 §27.54**

| | | |
|---|---|---|
| OPERATING FREQUENCY: | 707,500,000 | Hz |
| CHANNEL: | 23790 | |
| REFERENCE VOLTAGE: | 3.85 | VDC |

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|---|---|---|---|---|---|
| 100 % | 3.85 | + 20 (Ref) | 707,499,807 | -193 | -0.0000272 |
| 100 % | | - 30 | 707,499,805 | -195 | -0.0000276 |
| 100 % | | - 20 | 707,499,913 | -87 | -0.0000122 |
| 100 % | | - 10 | 707,499,983 | -17 | -0.0000025 |
| 100 % | | 0 | 707,499,931 | -69 | -0.0000098 |
| 100 % | | + 10 | 707,499,865 | -135 | -0.0000190 |
| 100 % | | + 20 | 707,499,834 | -166 | -0.0000234 |
| 100 % | | + 30 | 707,499,824 | -176 | -0.0000249 |
| 100 % | | + 40 | 707,499,934 | -66 | -0.0000094 |
| 100 % | | + 50 | 707,499,853 | -147 | -0.0000208 |
| BATT. ENDPOINT | 3.40 | + 20 | 707,499,995 | -5 | -0.0000006 |

**Table 6-27. Frequency Stability Data (Band 12)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## Band 12 Frequency Stability Measurements

**§2.1055 §27.54**

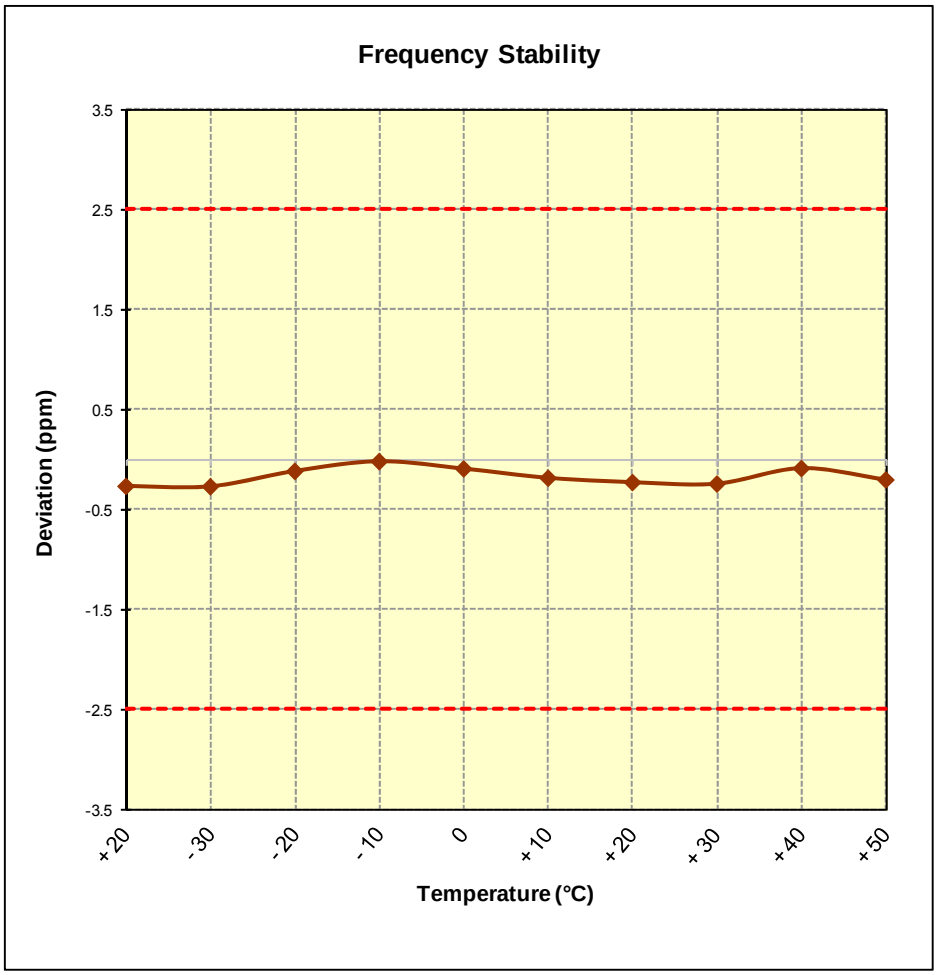


**Figure 6-7. Frequency Stability Graph (Band 12)**

## Band 26 Frequency Stability Measurements

**§2.1055 §22.355**

| | | |
|---|---|---|
| OPERATING FREQUENCY: | 831,500,000 | Hz |
| CHANNEL: | 26865 | |
| REFERENCE VOLTAGE: | 3.85 | VDC |
| DEVIATION LIMIT: | ± 0.00025 % or 2.5 ppm | |

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|---|---|---|---|---|---|
| 100 % | 3.85 | + 20 (Ref) | 831,499,943 | -57 | -0.0000069 |
| 100 % | | - 30 | 831,499,955 | -45 | -0.0000054 |
| 100 % | | - 20 | 831,499,841 | -159 | -0.0000191 |
| 100 % | | - 10 | 831,499,920 | -80 | -0.0000096 |
| 100 % | | 0 | 831,499,988 | -12 | -0.0000014 |
| 100 % | | + 10 | 831,499,943 | -57 | -0.0000068 |
| 100 % | | + 20 | 831,499,989 | -11 | -0.0000013 |
| 100 % | | + 30 | 831,499,892 | -108 | -0.0000129 |
| 100 % | | + 40 | 831,499,950 | -50 | -0.0000060 |
| 100 % | | + 50 | 831,499,890 | -110 | -0.0000132 |
| BATT. ENDPOINT | 3.40 | + 20 | 831,499,942 | -58 | -0.0000069 |

**Table 6-28. Frequency Stability Data (Band 26)**

## Band 26 Frequency Stability Measurements

**§2.1055 §22.355**

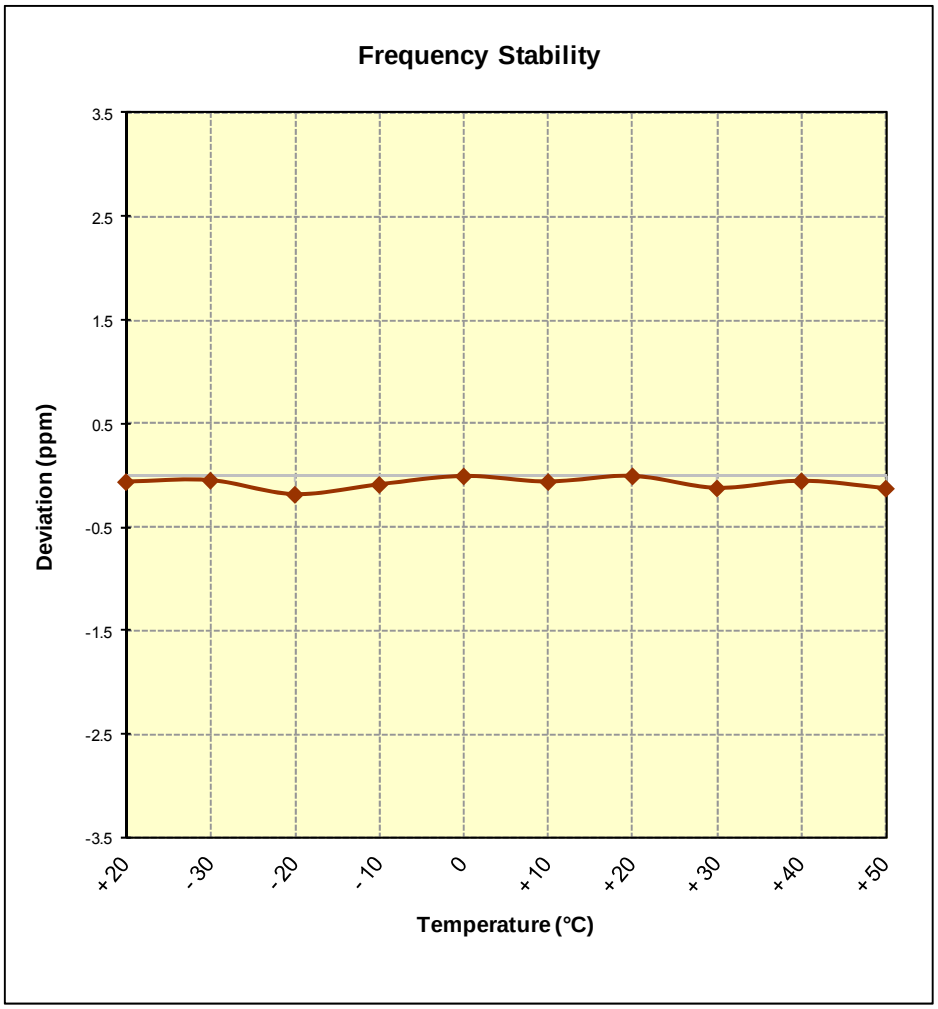


**Figure 6-8. Frequency Stability Graph (Band 26)**

## Band 4 Frequency Stability Measurements

**§2.1055 §§27.54**

| | | |
|---|---|---|
| OPERATING FREQUENCY: | 1,732,500,000 | Hz |
| CHANNEL: | 20175 | |
| REFERENCE VOLTAGE: | 3.85 | VDC |

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|---|---|---|---|---|---|
| 100 % | 3.85 | + 20 (Ref) | 1,732,499,838 | -162 | -0.0000093 |
| 100 % | | - 30 | 1,732,499,834 | -166 | -0.0000096 |
| 100 % | | - 20 | 1,732,499,914 | -86 | -0.0000049 |
| 100 % | | - 10 | 1,732,499,916 | -84 | -0.0000049 |
| 100 % | | 0 | 1,732,499,849 | -151 | -0.0000087 |
| 100 % | | + 10 | 1,732,499,992 | -8 | -0.0000005 |
| 100 % | | + 20 | 1,732,499,966 | -34 | -0.0000019 |
| 100 % | | + 30 | 1,732,499,854 | -146 | -0.0000084 |
| 100 % | | + 40 | 1,732,499,983 | -17 | -0.0000010 |
| 100 % | | + 50 | 1,732,499,971 | -29 | -0.0000017 |
| BATT. ENDPOINT | 3.40 | + 20 | 1,732,499,945 | -55 | -0.0000032 |

**Table 6-29. Frequency Stability Data (Band 4)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## Band 4 Frequency Stability Measurements

**§2.1055 §§27.54**

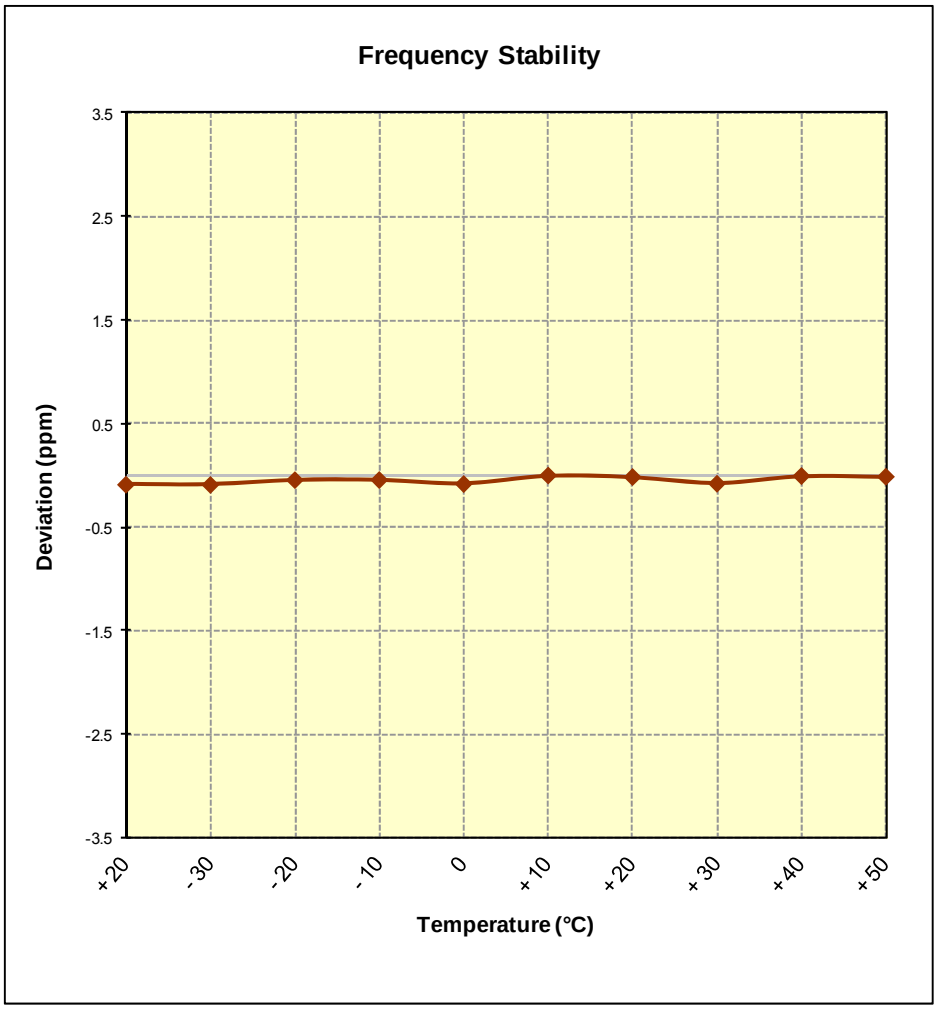


**Figure 6-9. Frequency Stability Graph (Band 4)**

## Band 25 Frequency Stability Measurements

**§2.1055 §24.235**

| | | |
|---|---|---|
| OPERATING FREQUENCY: | 1,882,500,000 | Hz |
| CHANNEL: | 26365 | |
| REFERENCE VOLTAGE: | 3.85 | VDC |

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|---|---|---|---|---|---|
| 100 % | 3.85 | + 20 (Ref) | 1,882,499,818 | -182 | -0.0000097 |
| 100 % | | - 30 | 1,882,499,808 | -192 | -0.0000102 |
| 100 % | | - 20 | 1,882,499,873 | -127 | -0.0000067 |
| 100 % | | - 10 | 1,882,499,804 | -196 | -0.0000104 |
| 100 % | | 0 | 1,882,499,844 | -156 | -0.0000083 |
| 100 % | | + 10 | 1,882,499,985 | -15 | -0.0000008 |
| 100 % | | + 20 | 1,882,499,923 | -77 | -0.0000041 |
| 100 % | | + 30 | 1,882,499,858 | -142 | -0.0000075 |
| 100 % | | + 40 | 1,882,499,920 | -80 | -0.0000043 |
| 100 % | | + 50 | 1,882,499,965 | -35 | -0.0000019 |
| BATT. ENDPOINT | 3.40 | + 20 | 1,882,499,994 | -6 | -0.0000003 |

**Table 6-30. Frequency Stability Data (Band 25)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## Band 25 Frequency Stability Measurements

**§2.1055 §24.235**

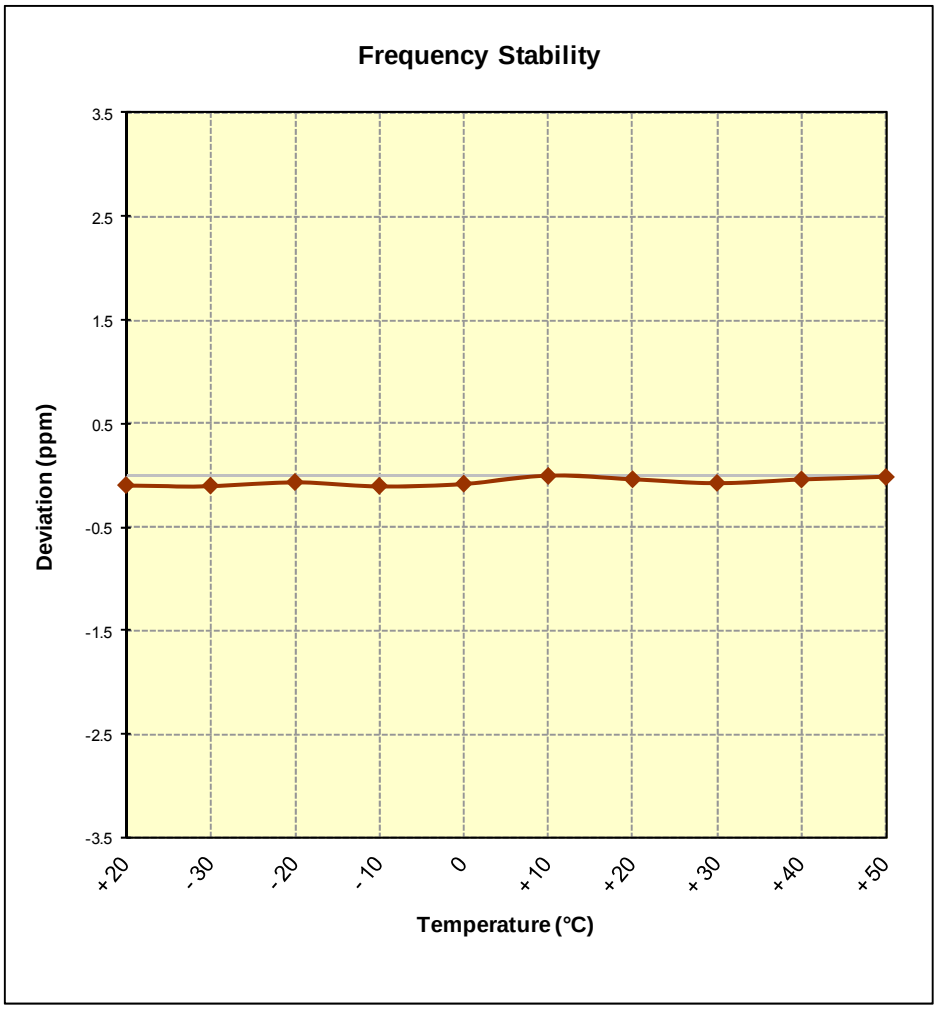


**Figure 6-10. Frequency Stability Graph (Band 25)**

## Band 41 Frequency Stability Measurements

**§2.1055 §27.54**

| | | |
|---|---|---|
| OPERATING FREQUENCY: | 2,593,000,000 | Hz |
| CHANNEL: | 40620 | |
| REFERENCE VOLTAGE: | 3.85 | VDC |

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|---|---|---|---|---|---|
| 100 % | 3.85 | + 20 (Ref) | 2,592,999,973 | -27 | -0.0000011 |
| 100 % | | - 30 | 2,592,999,876 | -124 | -0.0000048 |
| 100 % | | - 20 | 2,592,999,850 | -150 | -0.0000058 |
| 100 % | | - 10 | 2,592,999,967 | -33 | -0.0000013 |
| 100 % | | 0 | 2,592,999,918 | -82 | -0.0000032 |
| 100 % | | + 10 | 2,592,999,900 | -100 | -0.0000038 |
| 100 % | | + 20 | 2,592,999,937 | -63 | -0.0000024 |
| 100 % | | + 30 | 2,592,999,825 | -175 | -0.0000067 |
| 100 % | | + 40 | 2,592,999,806 | -194 | -0.0000075 |
| 100 % | | + 50 | 2,592,999,948 | -52 | -0.0000020 |
| BATT. ENDPOINT | 3.40 | + 20 | 2,592,999,819 | -181 | -0.0000070 |

**Table 6-31. Frequency Stability Data (Band 41)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## Band 41 Frequency Stability Measurements

**§2.1055 §27.54**

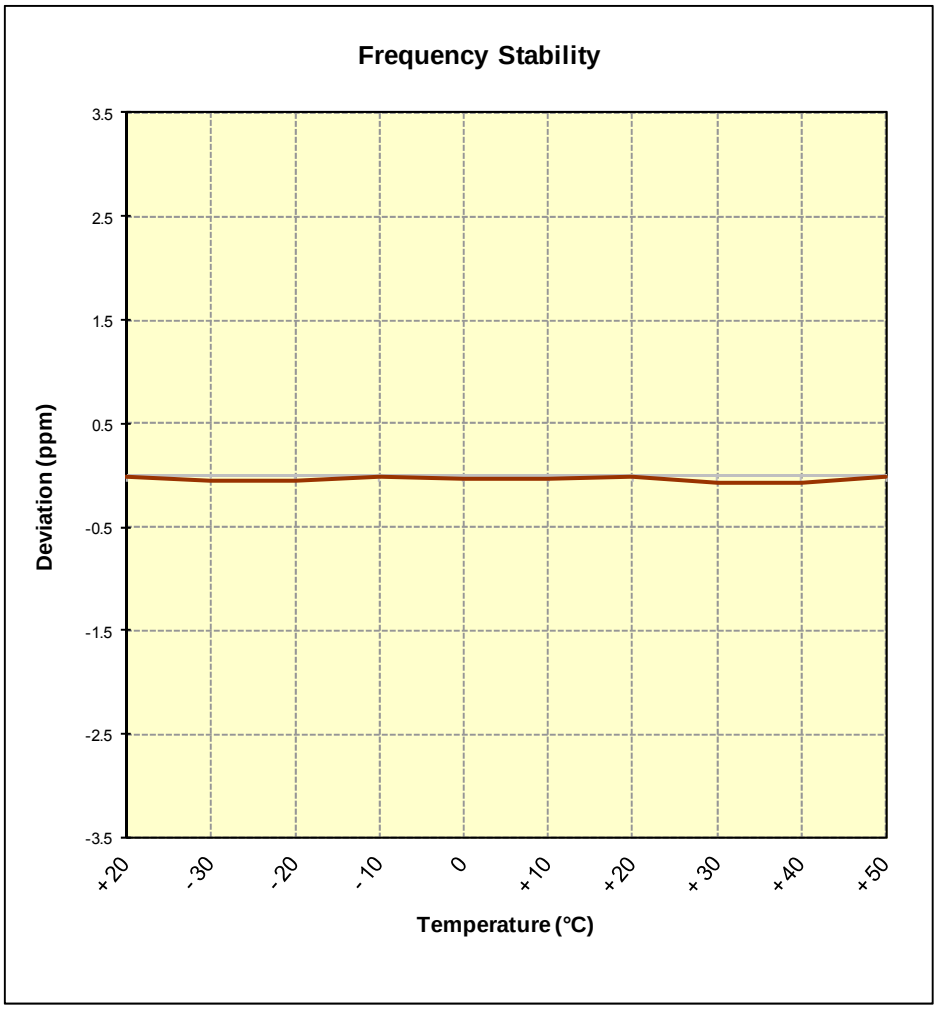


**Figure 6-11. Frequency Stability Graph (Band 41)**

# 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG925P** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.