



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctest.com



## MEASUREMENT REPORT

### FCC PART 15.407 / ISED RSS-247 UNII 802.11a/n/ac

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

11/1-12/7/2017

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M1711010281-06-R2.A3L

<b>FCC ID:</b>	<b>A3LSMG960U</b>
<b>IC:</b>	<b>649E-SMG960U</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

**Application Type:**

Certification

**Model:**

SM-G960U, SM-G960U1, SM-G960W, SM-G960XU

**HVIN:**

SM-G960W

**EUT Type:**

Portable Handset

**Frequency Range:**

5180 – 5825MHz

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**ISED Specification:**

RSS-247 Issue 2


**Test Procedure(s):**

ANSI C63.10-2013, KDB 789033 D02 v02,  
KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1711010281-06-R2.A3L) supersedes and replaces the previously issued test report (S/N: 1M1711010281-06-R1.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President




FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711010281-06-R2.A3L	<b>Test Dates:</b> 11/1-12/7/2017	<b>EUT Type:</b> Portable Handset	Page 1 of 200	


## T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration.....	7
2.4	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS.....	8
3.1	Evaluation Procedure.....	8
3.2	AC Line Conducted Emissions.....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS.....	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	26dB Bandwidth Measurement – 802.11a/n/ac.....	14
7.3	6dB Bandwidth Measurement – 802.11a/n/ac.....	47
7.4	UNII Output Power Measurement – 802.11a/n/ac.....	58
7.5	Maximum Power Spectral Density – 802.11a/n/ac.....	64
7.6	Frequency Stability.....	109
7.7	Radiated Spurious Emission Measurements – Above 1GHz.....	113
7.7.1	Antenna-1 Radiated Spurious Emission Measurements.....	116
7.7.2	Antenna-2 Radiated Spurious Emission Measurements.....	129
7.7.3	Simultaneous Tx Radiated Spurious Emissions Measurements.....	142
7.7.4	Antenna-1 Radiated Band Edge Measurements (20MHz BW).....	154
7.7.5	Antenna-1 Radiated Band Edge Measurements (40MHz BW).....	157
7.7.6	Antenna-1 Radiated Band Edge Measurements (80MHz BW).....	160
7.7.7	Antenna-2 Radiated Band Edge Measurements (20MHz BW).....	163
7.7.8	Antenna-2 Radiated Band Edge Measurements (40MHz BW).....	166
7.7.9	Antenna-2 Radiated Band Edge Measurements (80MHz BW).....	169
7.7.10	MIMO Radiated Band Edge Measurements (20MHz BW).....	172
7.7.11	MIMO Radiated Band Edge Measurements (40MHz BW).....	175
7.7.12	MIMO Radiated Band Edge Measurements (80MHz BW).....	178
7.7.13	CDD Radiated Band Edge Measurements (20MHz BW).....	181
7.8	Radiated Spurious Emissions Measurements – Below 1GHz.....	184
7.9	Line-Conducted Test Data.....	189
8.0	CONCLUSION.....	200

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711010281-06-R2.A3L	<b>Test Dates:</b> 11/1-12/7/2017	<b>EUT Type:</b> Portable Handset	Page 2 of 200	



# MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO/CDD	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	69.183	18.40	64.121	18.07	106.660	20.28
2A		5260 - 5320	67.298	18.28	65.615	18.17	111.173	20.46
2C		5500 - 5720	69.024	18.39	69.502	18.42	111.173	20.46
3		5745 - 5825	66.222	18.21	65.464	18.16	109.144	20.38
1	40	5190 - 5230	50.466	17.03	46.559	16.68	97.051	19.87
2A		5270 - 5310	48.529	16.86	48.084	16.82	93.756	19.72
2C		5510 - 5710	52.360	17.19	53.827	17.31	106.187	20.26
3		5755 - 5795	46.666	16.69	52.966	17.24	99.541	19.98
1	80	5210	49.204	16.92	45.499	16.58	55.335	17.43
2A		5290	48.978	16.90	46.026	16.63	55.335	17.43
2C		5530 - 5690	45.186	16.55	45.709	16.60	90.894	19.59
3		5775	47.973	16.81	46.238	16.65	94.211	19.74

## EUT Overview

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 3 of 200	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

<b>FCC ID:</b> A3LSMG960U <b>IC:</b> 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711010281-06-R2.A3L	<b>Test Dates:</b> 11/1-12/7/2017	<b>EUT Type:</b> Portable Handset	Page 4 of 200	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG960U**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

**Test Device Serial No.:** 2379E,19431,5F2D1,5ED58,5AEE9,5AEDF,5AEE5, 2472C, 20E5A

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	157	5785
				:	:	:	:
				142	5710	161	5805

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 5 of 200

**Notes:**

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO/CDD
5GHz	a	98.3	98.8	98.9
	n (HT20)	98.2	98.2	96.6
	ac (HT20)	98.8	98.8	97.8
	n (HT40)	96.5	96.5	95.7
	ac (HT40)	97.7	96.5	93.8
	ac (HT80)	93.2	93.2	92.3

**Table 2-4. Measured Duty Cycles**

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗	✓	✓
	11n (20MHz)	✓	✓	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓	✓	✓

**Table 2-5. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)

29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,

351/390, 390/433.3 (ac – 80MHz BW)

13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4Mbps

(MIMO n/ac – 20MHz) 156/173Mbps (MIMO ac – 20MHz)

27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243,270, 270/300Mbps (MIMO n/ac –

40MHz) 324/360, 360/400Mbps (MIMO ac – 40MHz)

58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780,

780/866.7Mbps (MIMO ac – 80MHz)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 6 of 200	

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report.

**Configuration 1:** ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	11	144
Operating Frequency (MHz)	2462	5720
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)**

**Configuration 2:** ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	1	40
Operating Frequency (MHz)	2412	5200
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)**

**Configuration 3:** ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	56
Operating Frequency (MHz)	2437	5280
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-8. Config-3 (ANT1 CDD & ANT2 CDD)**

## 2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated and AC line conducted spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 7 of 200	



## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

<b>FCC ID:</b> A3LSMG960U <b>IC:</b> 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711010281-06-R2.A3L	<b>Test Dates:</b> 11/1-12/7/2017	<b>EUT Type:</b> Portable Handset	Page 8 of 200	



### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> A3LSMG960U <b>IC:</b> 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711010281-06-R2.A3L	<b>Test Dates:</b> 11/1-12/7/2017	<b>EUT Type:</b> Portable Handset	Page 9 of 200	

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
<b>Test Report S/N:</b> 1M1711010281-06-R2.A3L	<b>Test Dates:</b> 11/1-12/7/2017	<b>EUT Type:</b> Portable Handset	Page 10 of 200	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 11 of 200	

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	6/14/2017	Annual	6/14/2018	WL25-1
Agilent	N9020A	MXA Signal Analyzer	12/28/2016	Annual	12/28/2017	US46470561
Agilent	N9038A	MXE EMI Receiver	4/26/2017	Annual	4/26/2018	MY51210133
Anritsu	MA2411B	Pulse Power Sensor	10/22/2017	Annual	10/22/2018	846215
Anritsu	ML2495A	Power Meter	10/22/2017	Annual	10/22/2018	941001
COM-Power	AL-130R	Active Loop Antenna	6/5/2017	Annual	6/5/2018	121085
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
EMCO	3160-10	Small Horn (26.5 - 40GHz)	8/23/2016	Biennial	8/23/2018	130993
Espec	ESX-2CA	Environmental Chamber	4/11/2017	Annual	4/11/2018	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS-Lindgren	3164-05	Quad Ridge Horn (Small) 2 - 18GHz	5/31/2016	Biennial	5/31/2018	208255
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	5/19/2017	Annual	5/19/2018	251425001
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	5/31/2017	Annual	5/31/2018	NMLC-1
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2017	Annual	3/7/2018	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100037
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	8/14/2017	Biennial	8/14/2019	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 12 of 200	

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMG960U  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(g)	RSS-Gen [6.11]	Frequency Stability	N/A		PASS	Section 7.6
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.7
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.7, 7.8
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.9

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Control,” Version 0.2.7.

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 13 of 200	

## 7.2 26dB Bandwidth Measurement – 802.11a/n/ac

RSS-Gen [6.2]

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

*The 26dB bandwidth is used to determine the conducted power limits.*

### Test Procedure Used


ANSI C63.10-2013 – Section 12.4  
KDB 789033 D02 v02 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 14 of 200	


## Antenna-1 26 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	23.99
	5200	40	a	6	25.23
	5240	48	a	6	28.06
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	28.79
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	27.85
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	29.15
	5190	38	n (40MHz)	13.5/15 (MCS0)	67.09
	5230	46	n (40MHz)	13.5/15 (MCS0)	73.00
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	99.85
Band 2A	5260	52	a	6	23.34
	5280	56	a	6	22.99
	5320	64	a	6	25.62
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	28.76
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	29.90
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	24.89
	5270	54	n (40MHz)	13.5/15 (MCS0)	72.65
	5310	62	n (40MHz)	13.5/15 (MCS0)	73.51
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.48
Band 2C	5500	100	a	6	23.69
	5580	116	a	6	21.26
	5720	144	a	6	23.16
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	24.39
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	24.13
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	26.72
	5510	102	n (40MHz)	13.5/15 (MCS0)	43.68
	5550	110	n (40MHz)	13.5/15 (MCS0)	72.62
	5710	142	n (40MHz)	13.5/15 (MCS0)	45.21
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	91.79
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	94.47


**Table 7-2. Conducted Bandwidth Measurements**

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 15 of 200



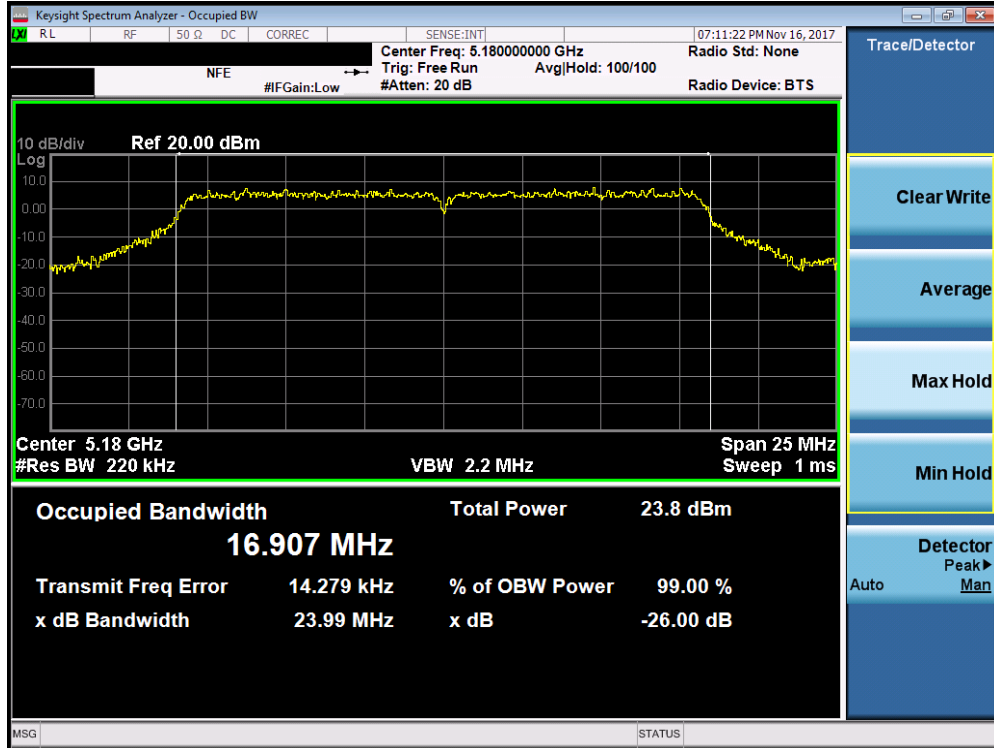


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

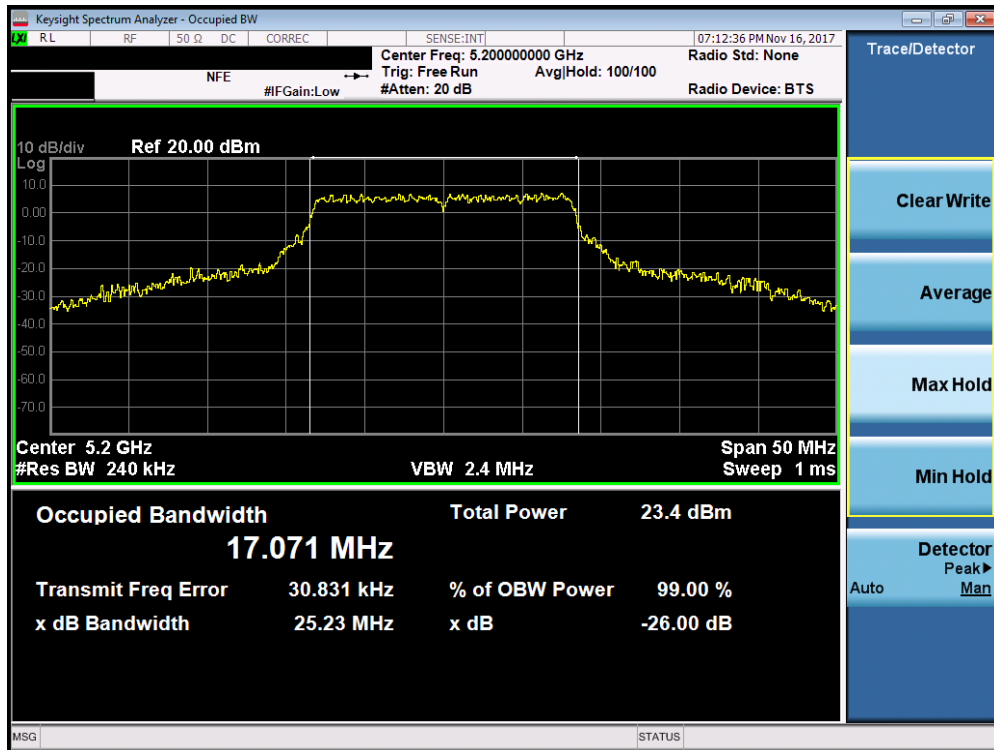


Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 16 of 200

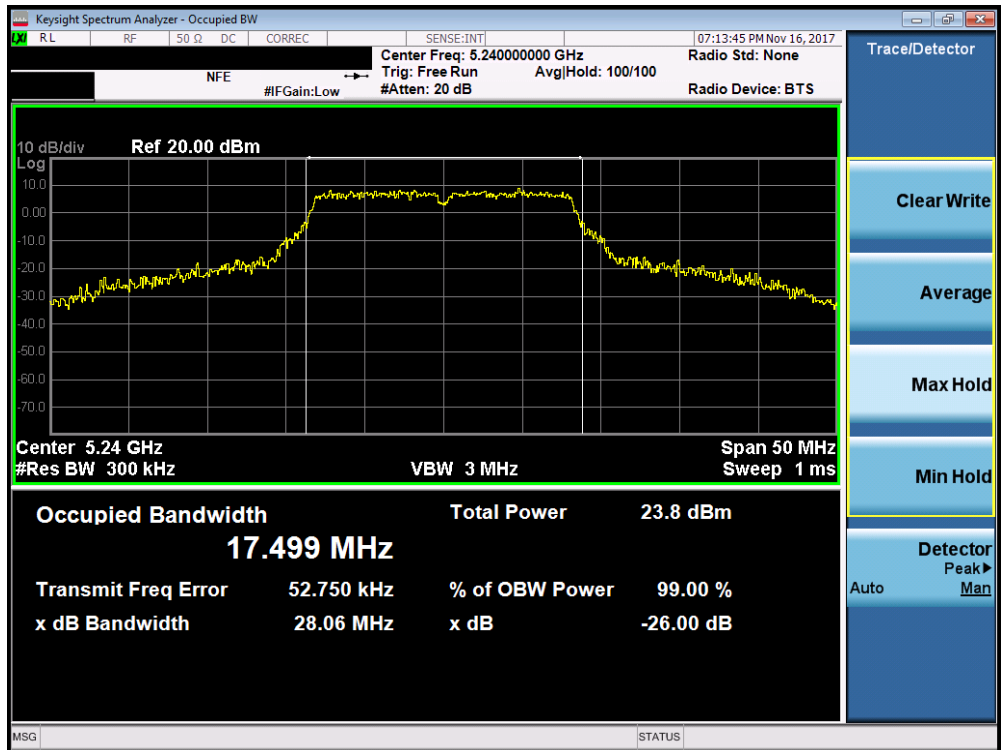


Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

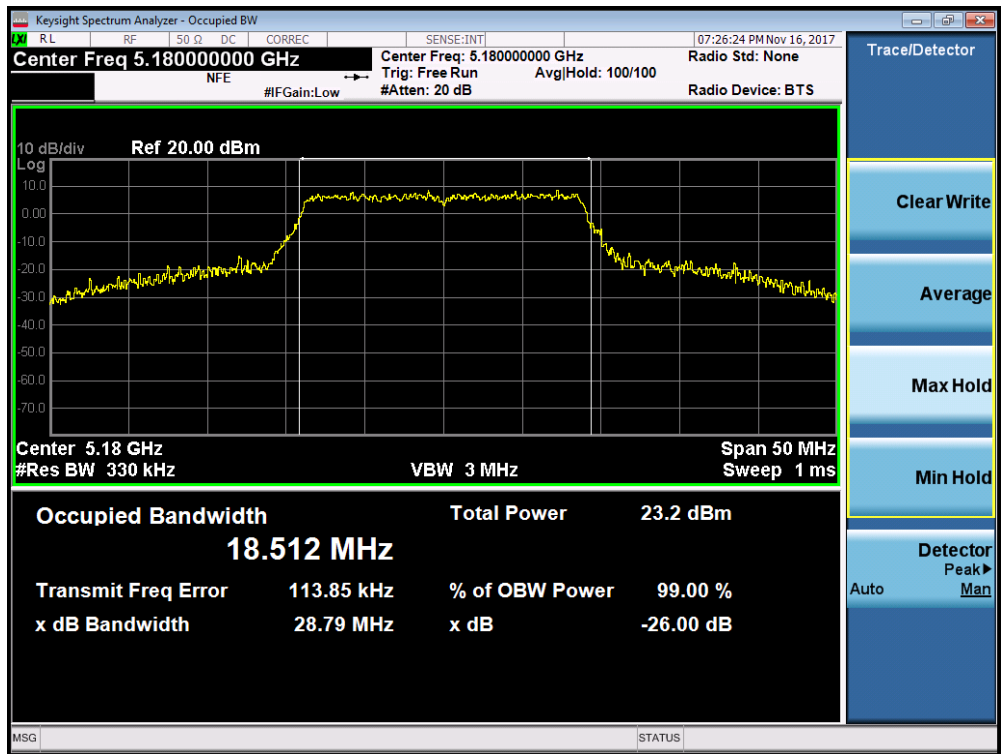


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 17 of 200

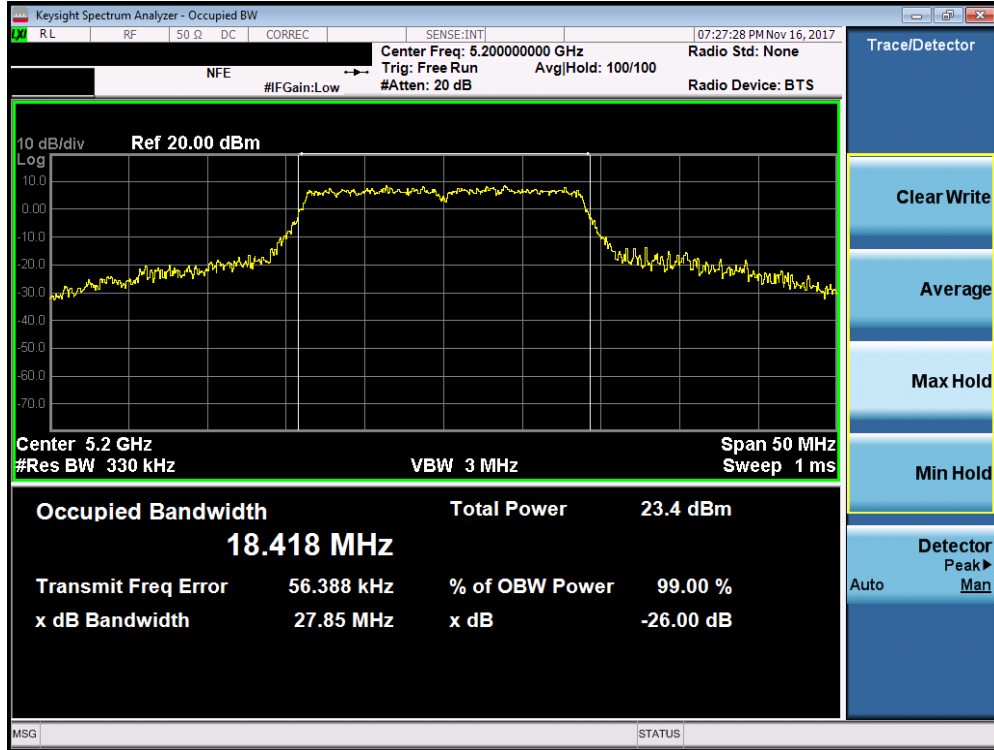


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

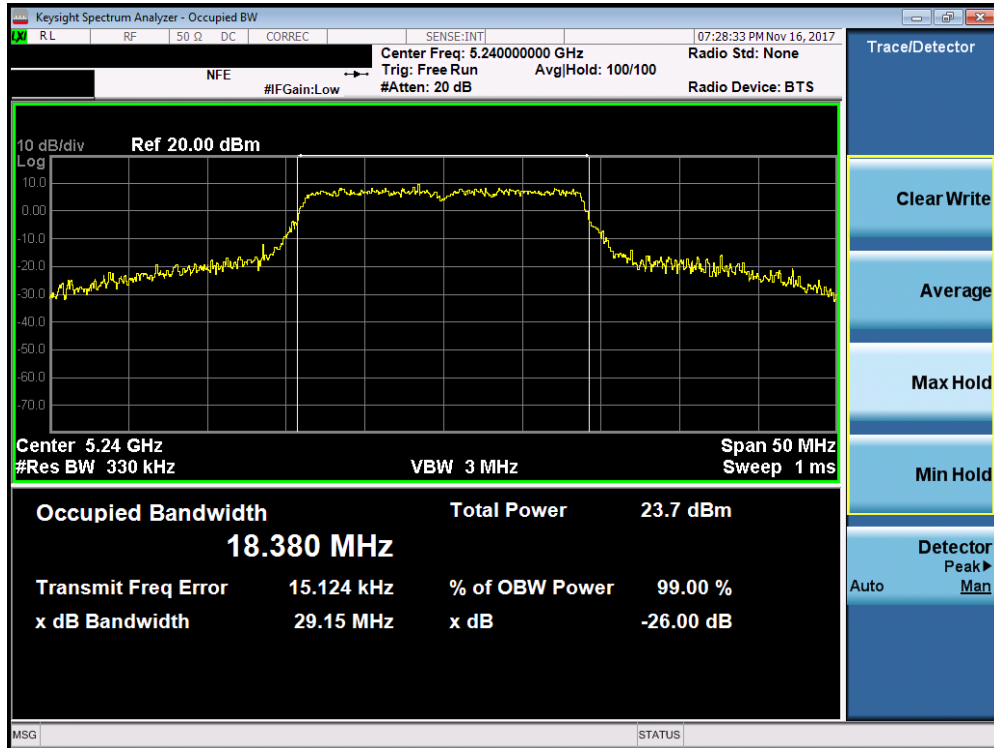


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 18 of 200

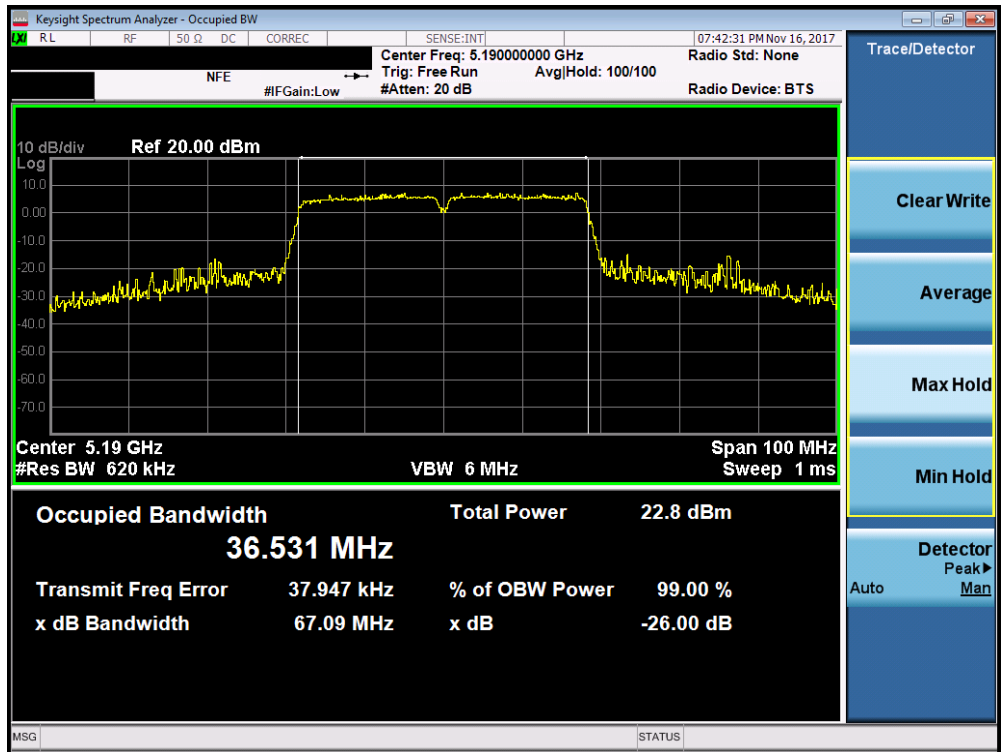


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

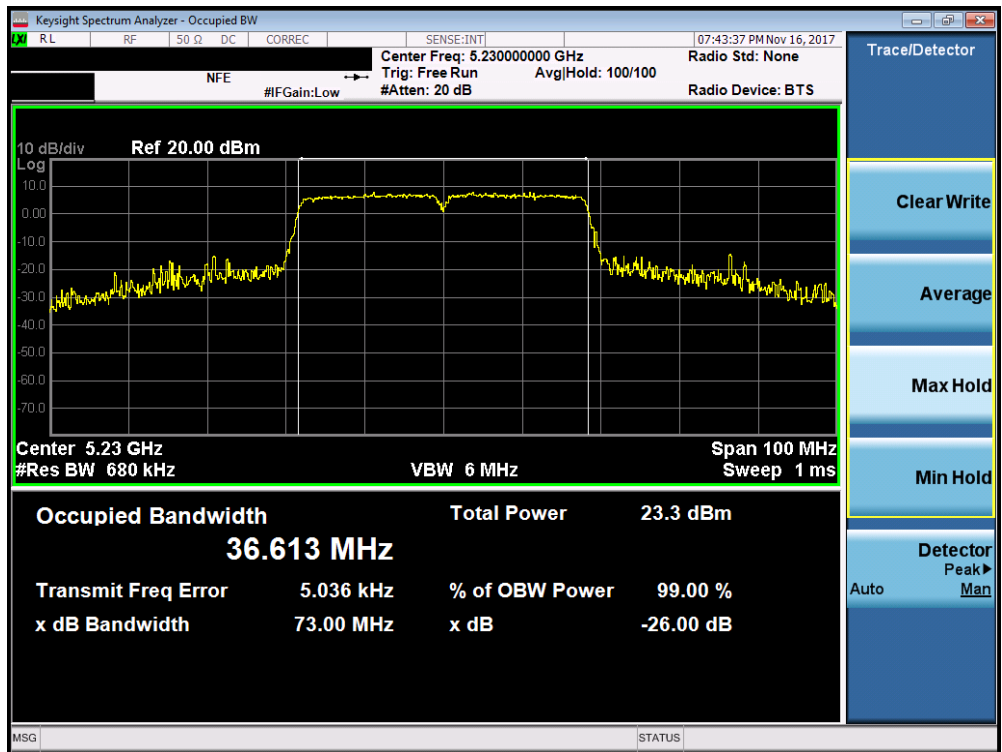


Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 19 of 200

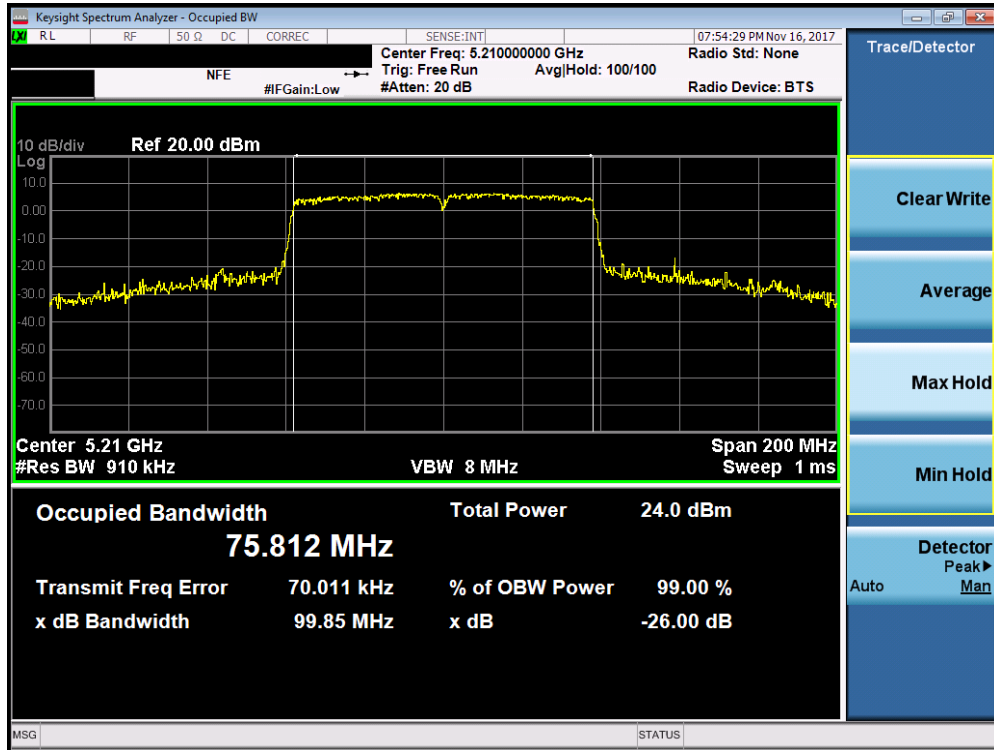


Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

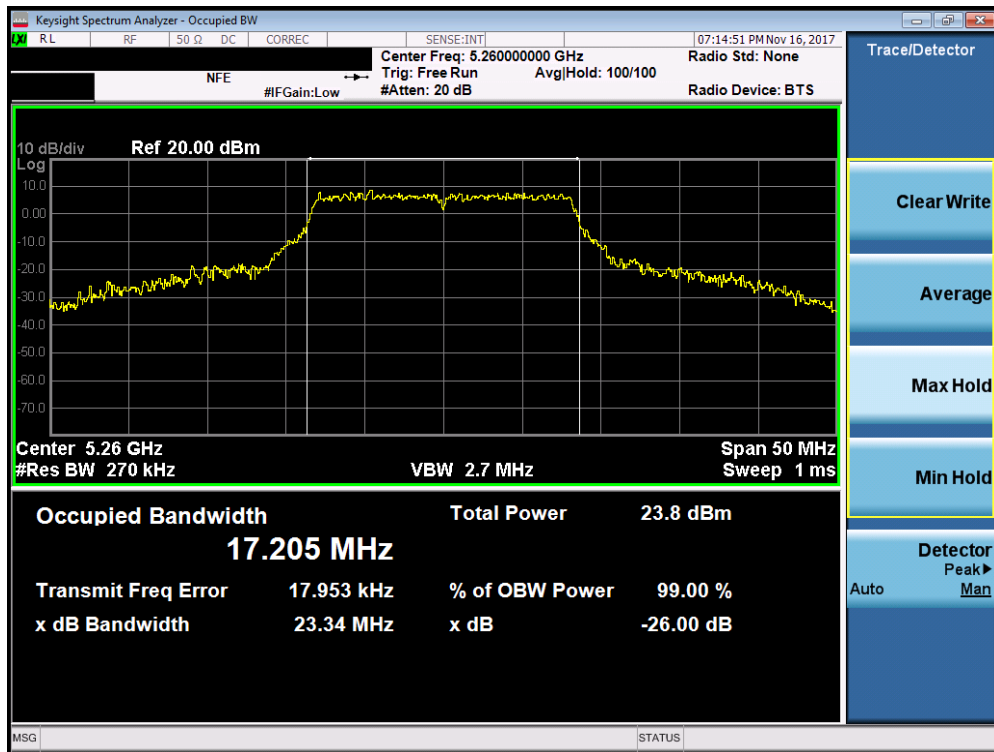


Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 20 of 200

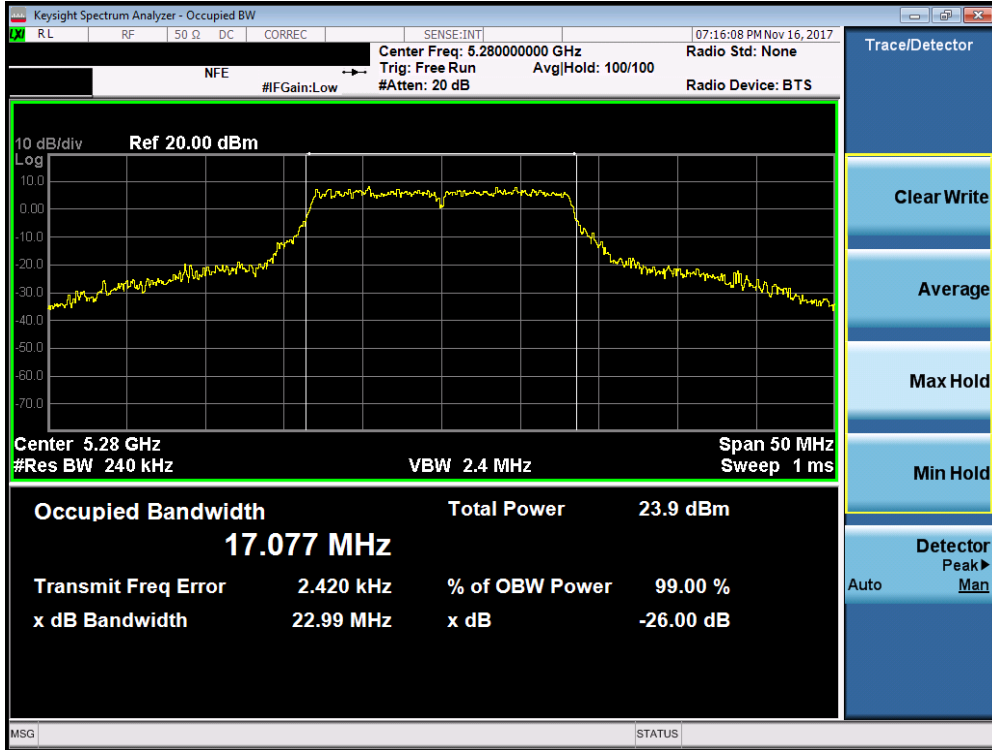


Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

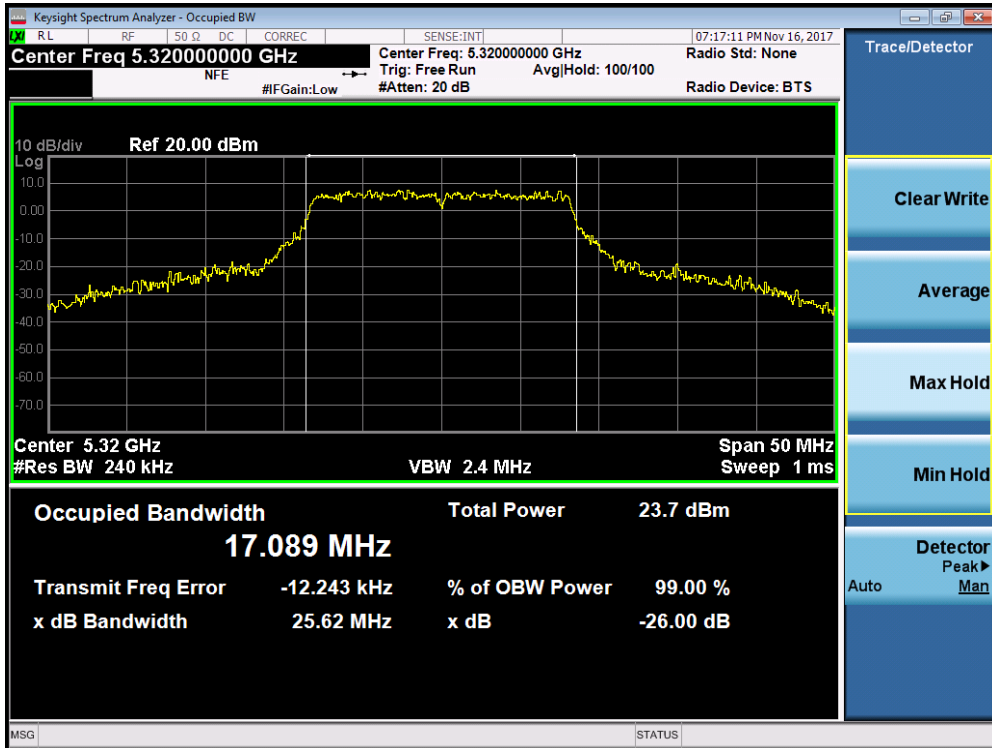


Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 21 of 200



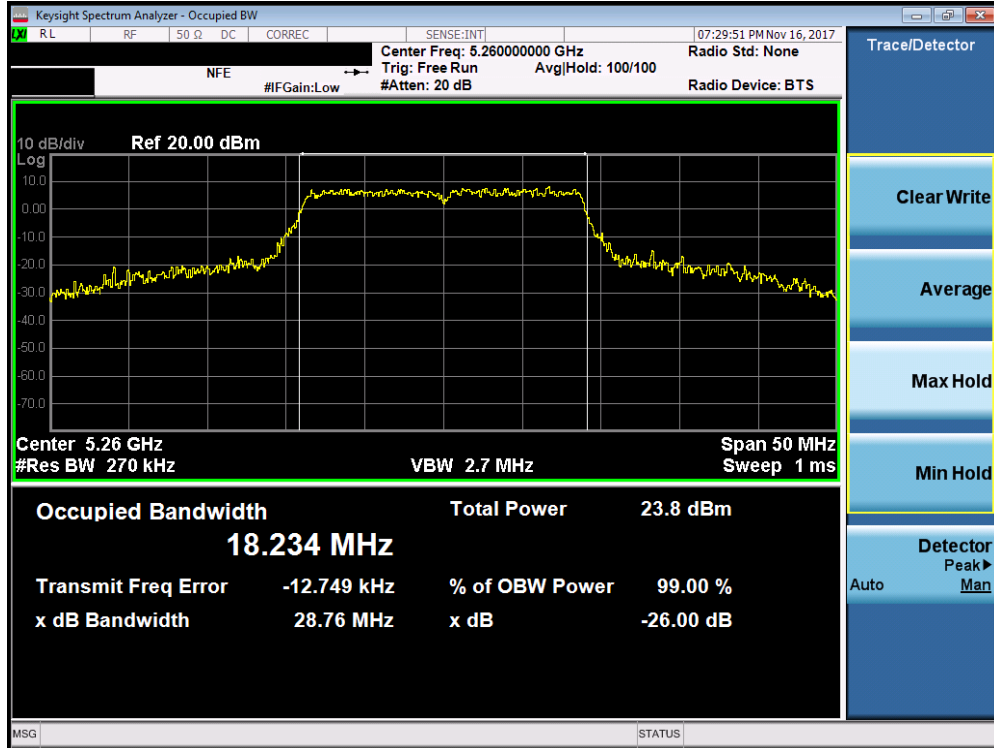


Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

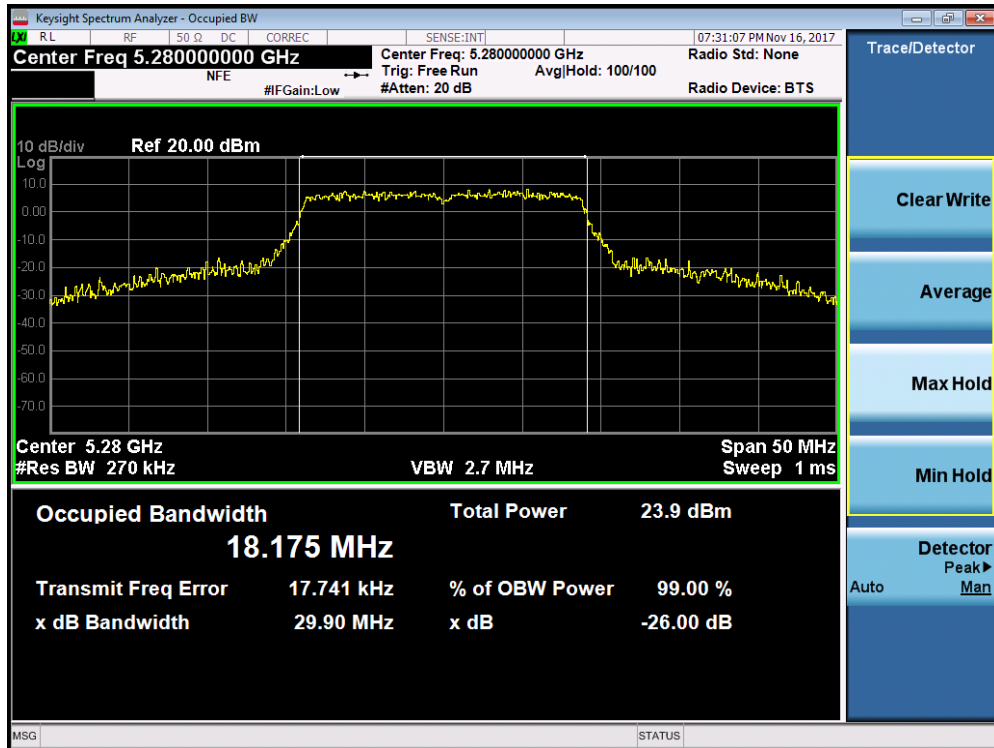


Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 22 of 200



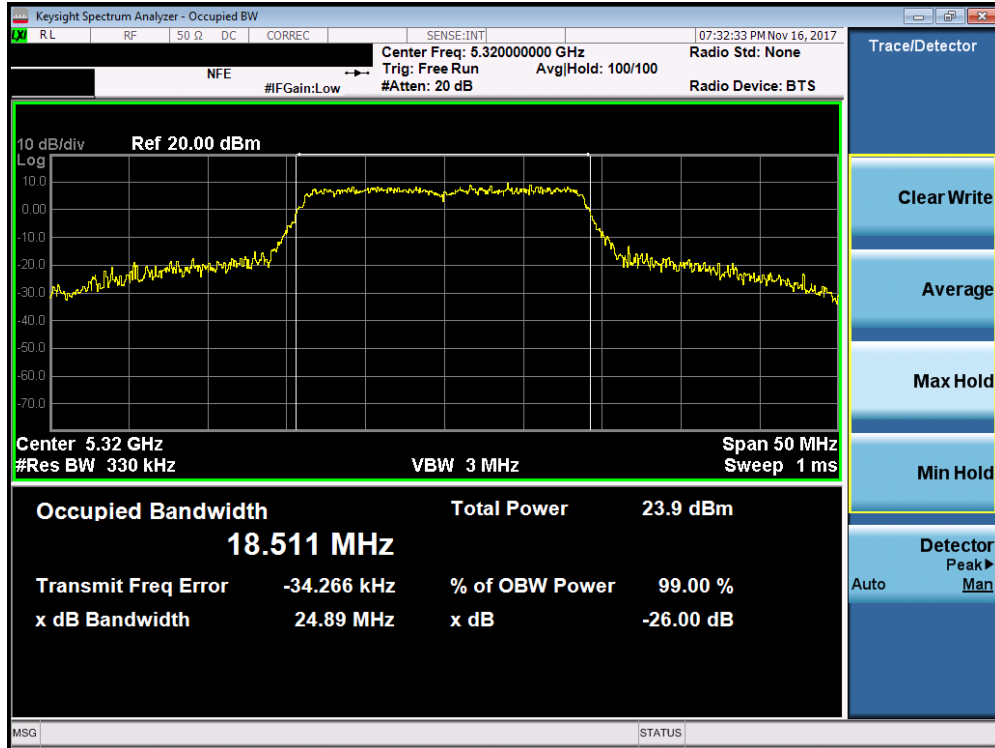


Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

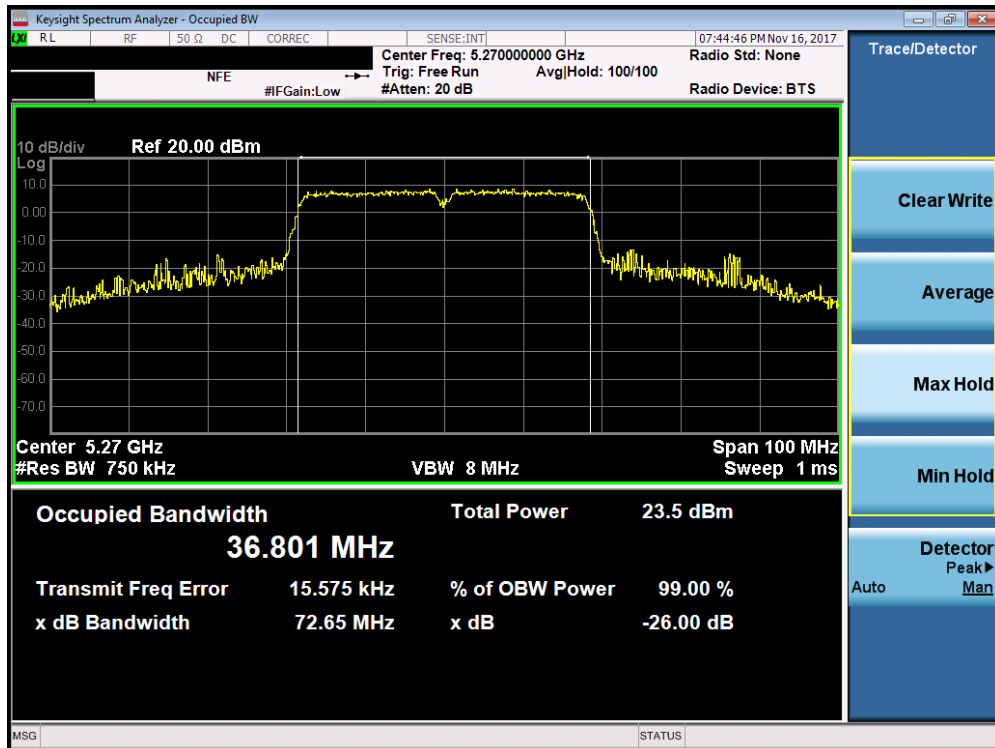


Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 23 of 200

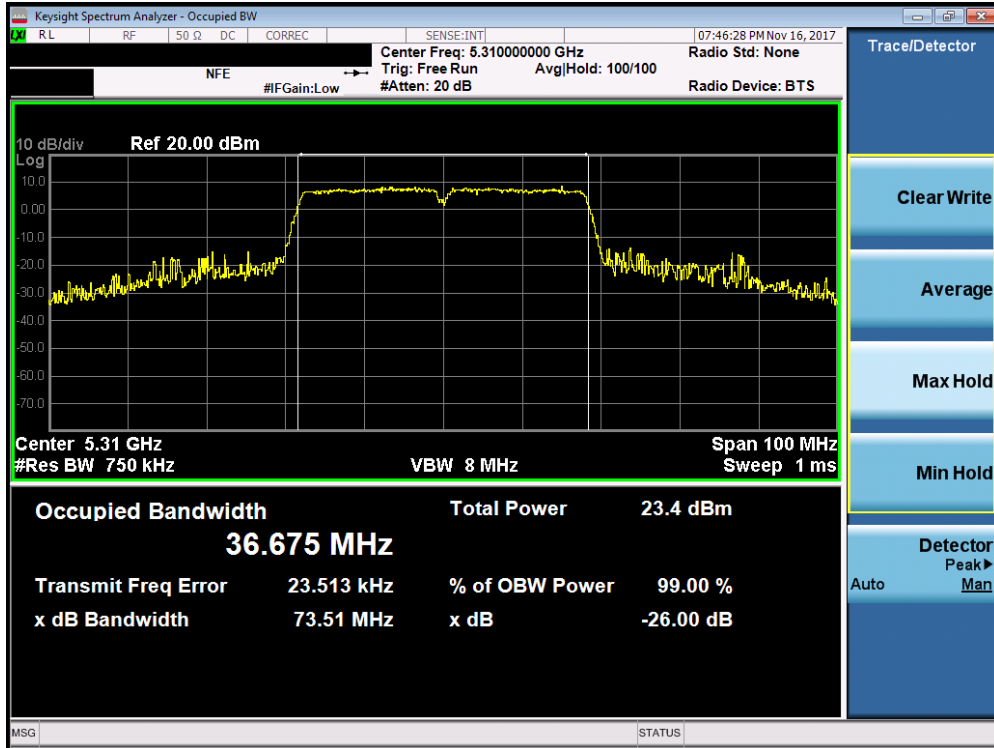


Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

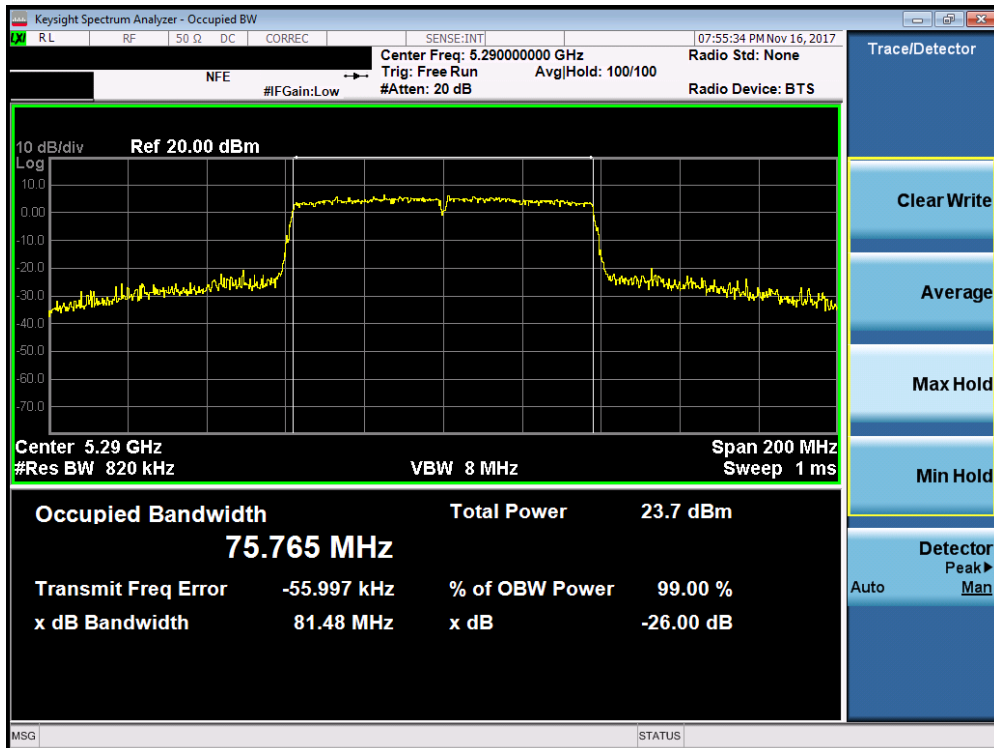


Plot 7-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 24 of 200

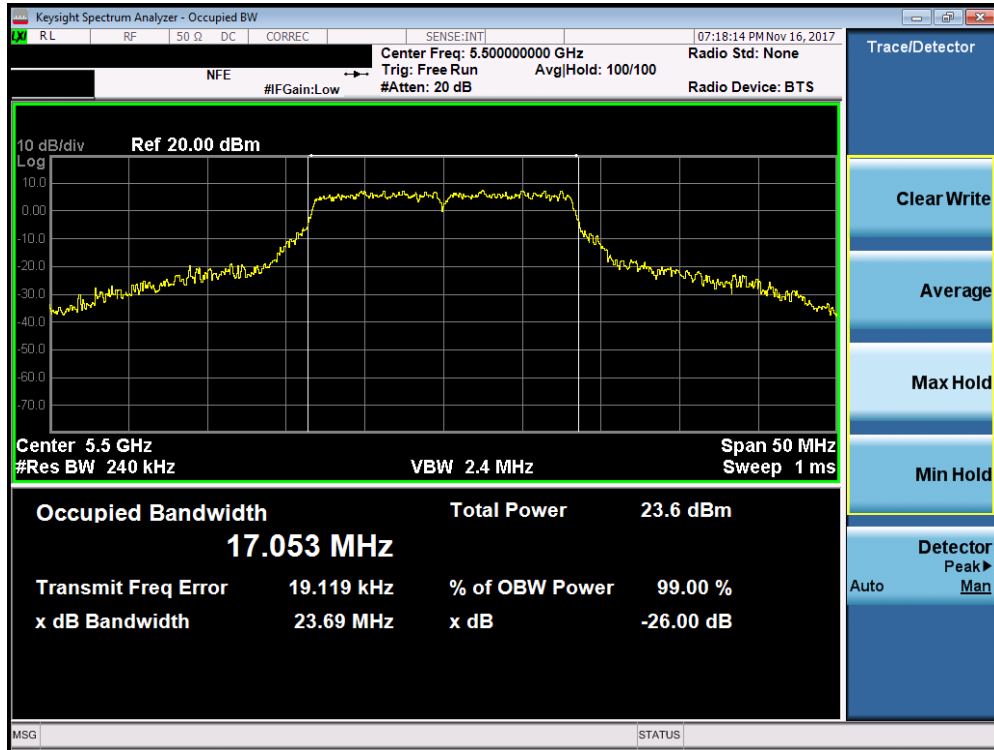


Plot 7-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

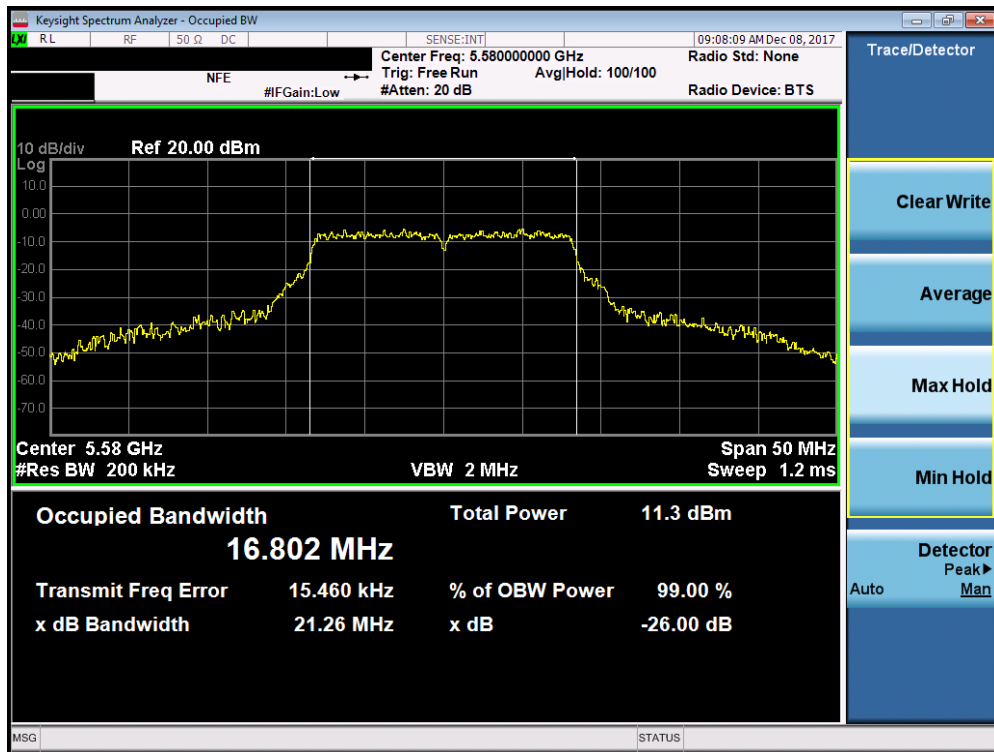


Plot 7-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 25 of 200

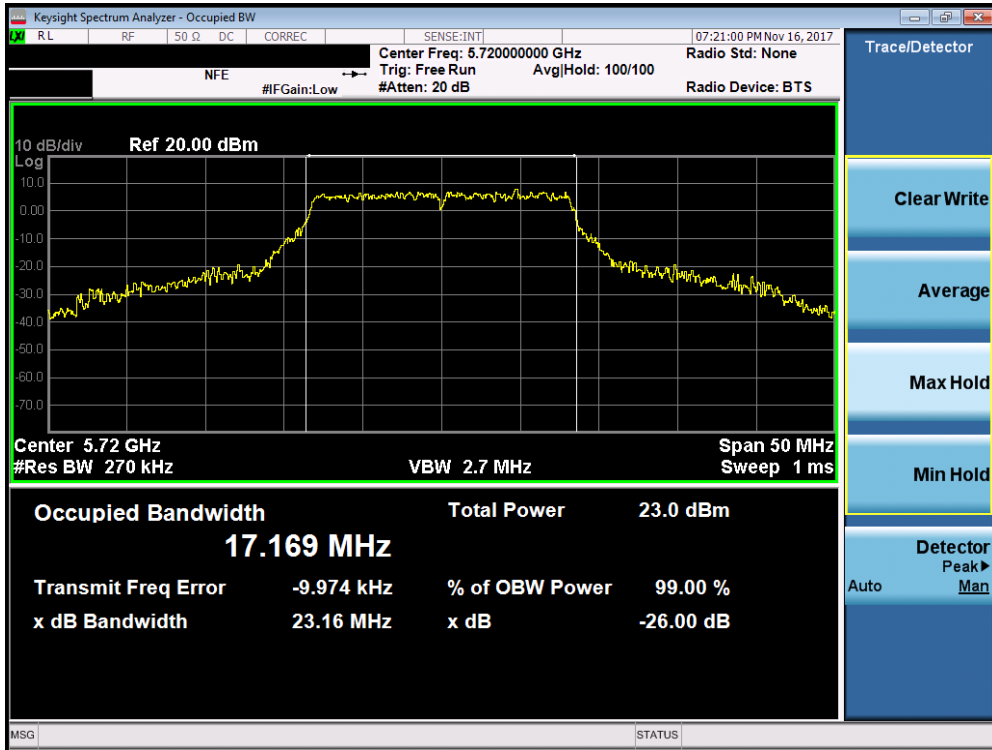


Plot 7-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

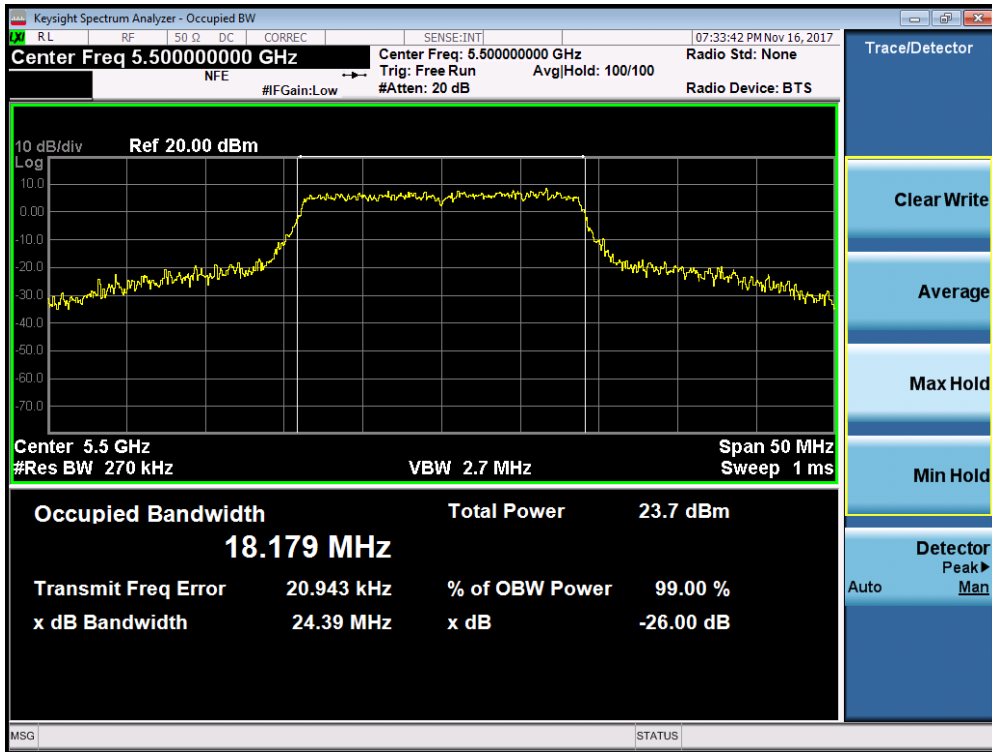


Plot 7-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 26 of 200

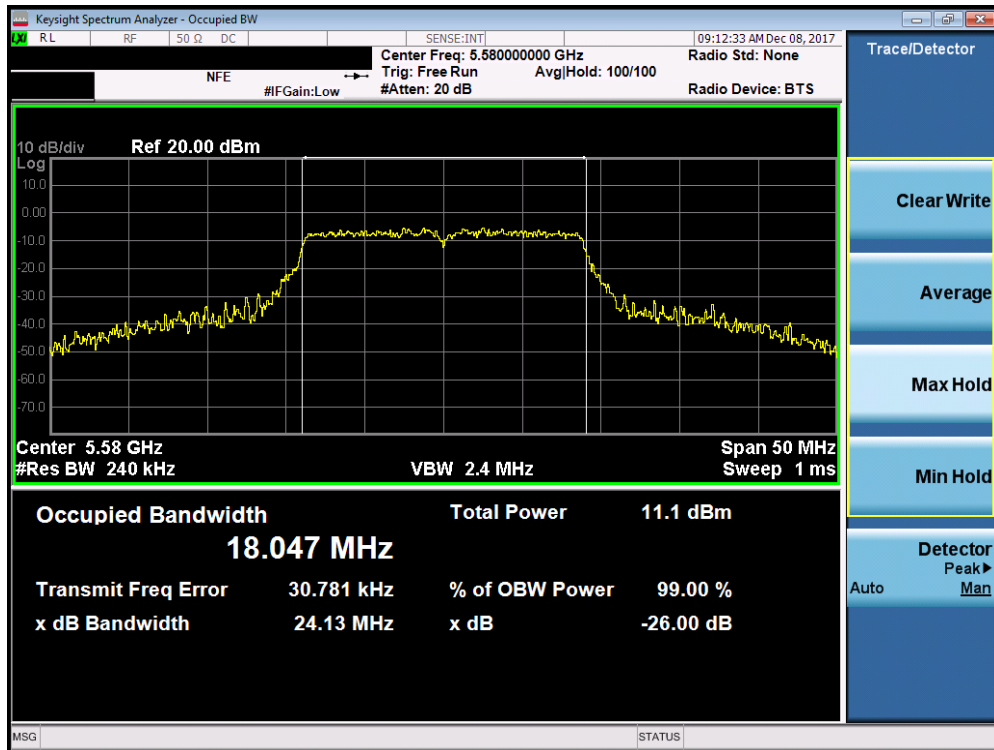


Plot 7-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

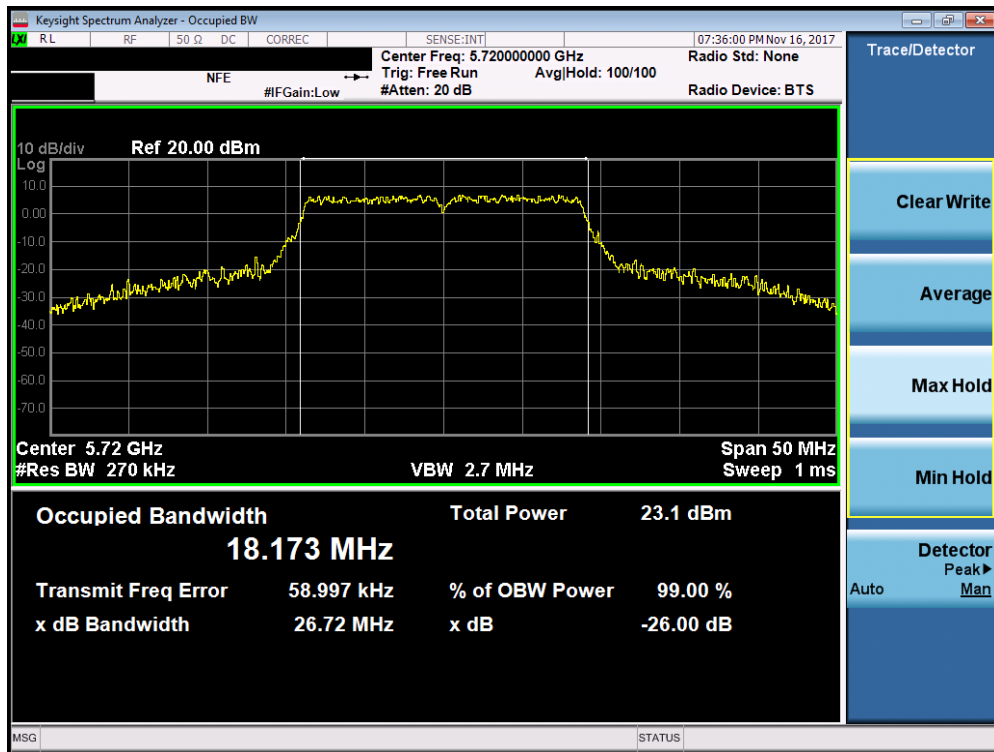


Plot 7-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 27 of 200

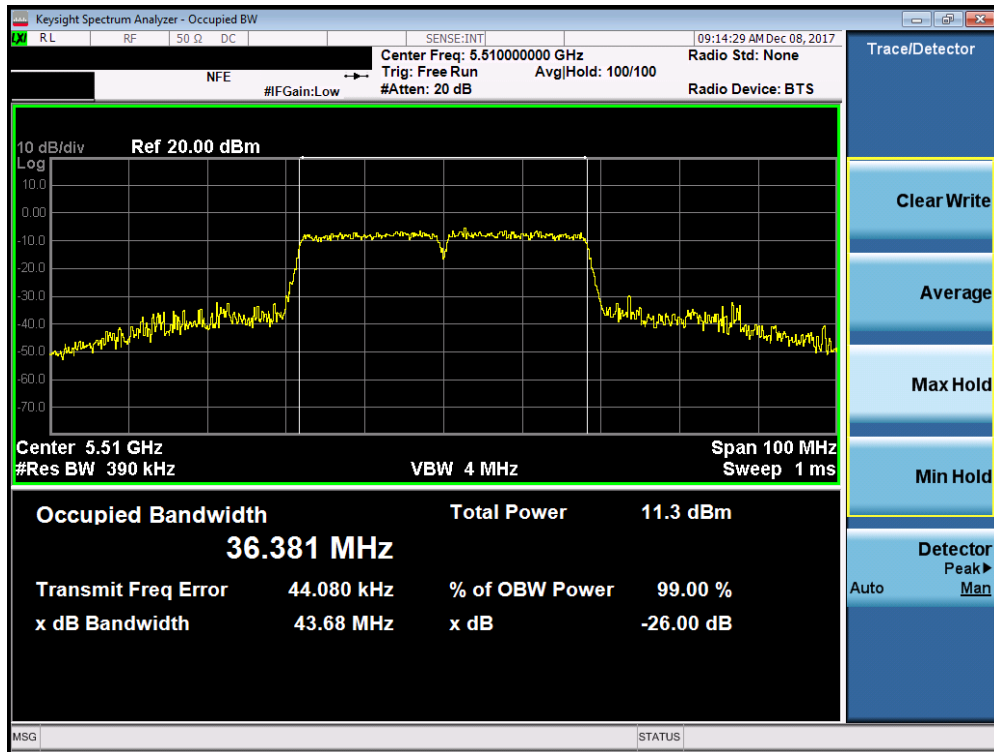


Plot 7-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

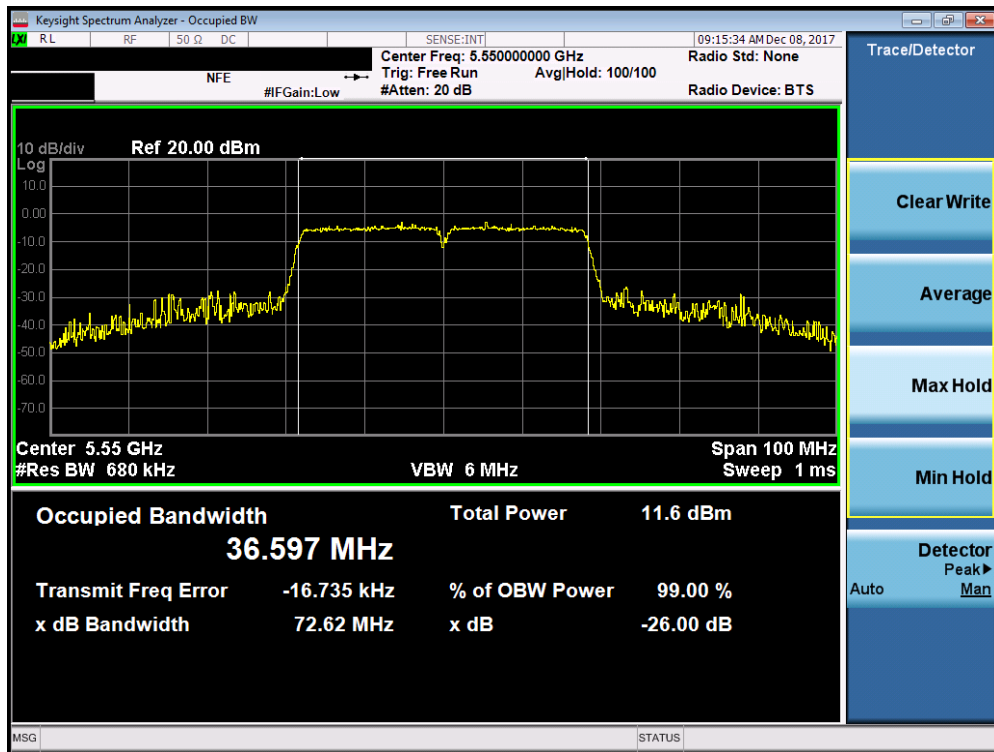


Plot 7-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 28 of 200



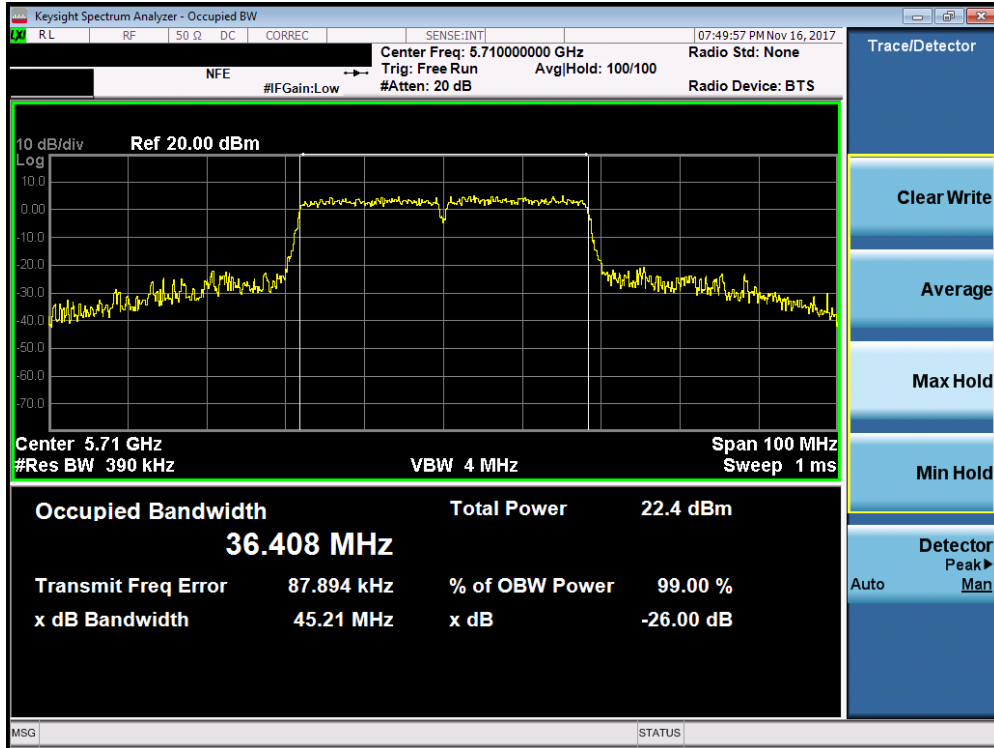


Plot 7-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

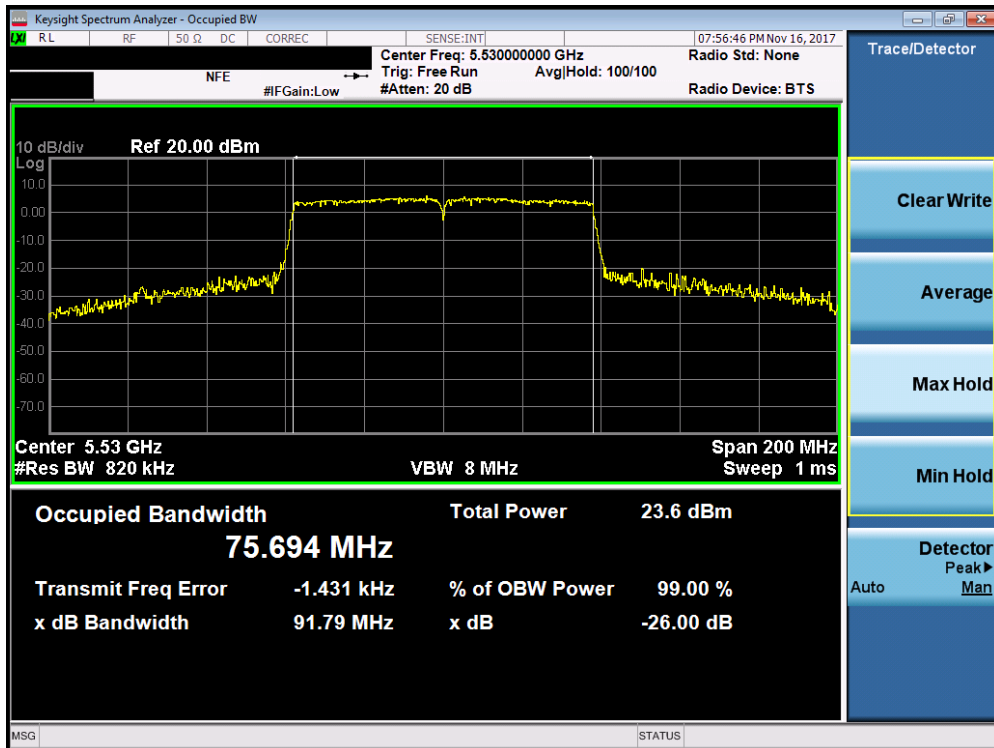

Plot 7-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 29 of 200



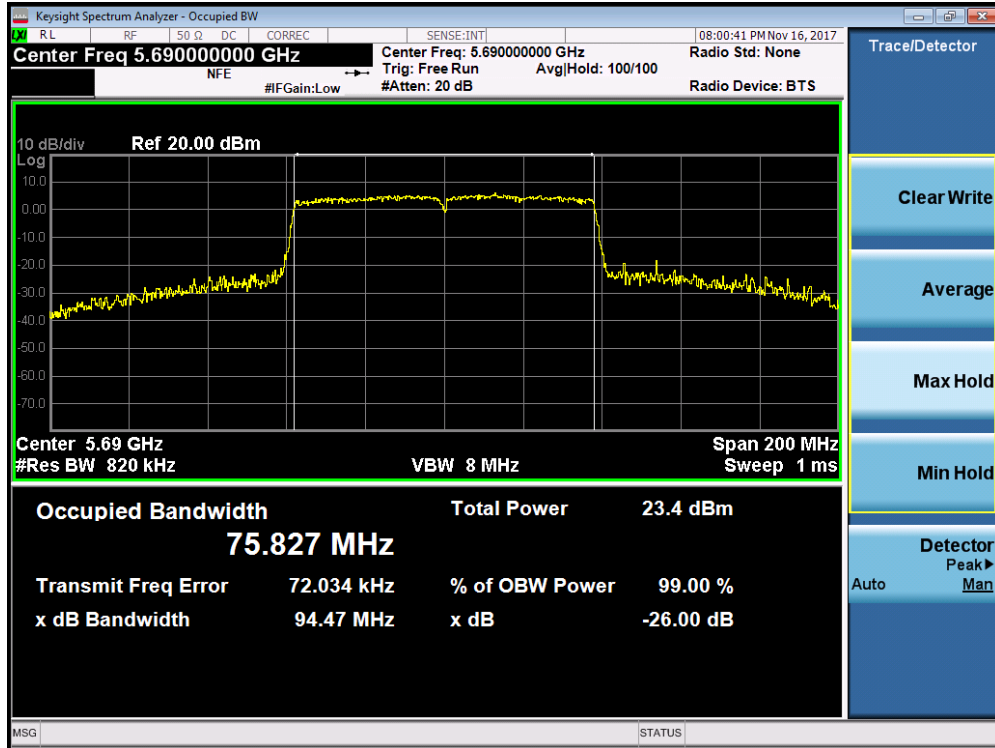

Plot 7-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 30 of 200

## Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	24.75
	5200	40	a	6	29.57
	5240	48	a	6	27.60
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	36.45
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	31.55
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	29.47
	5190	38	n (40MHz)	13.5/15 (MCS0)	65.25
	5230	46	n (40MHz)	13.5/15 (MCS0)	59.92
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.50
Band 2A	5260	52	a	6	25.71
	5280	56	a	6	26.88
	5320	64	a	6	25.73
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	28.71
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	29.30
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	29.27
	5270	54	n (40MHz)	13.5/15 (MCS0)	52.83
	5310	62	n (40MHz)	13.5/15 (MCS0)	65.99
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.73
Band 2C	5500	100	a	6	21.68
	5580	116	a	6	21.76
	5720	144	a	6	23.85
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	24.12
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.56
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	28.80
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.64
	5550	110	n (40MHz)	13.5/15 (MCS0)	73.15
	5710	142	n (40MHz)	13.5/15 (MCS0)	56.59
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.65
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.59

**Table 7-3. Conducted Bandwidth Measurements**

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 31 of 200

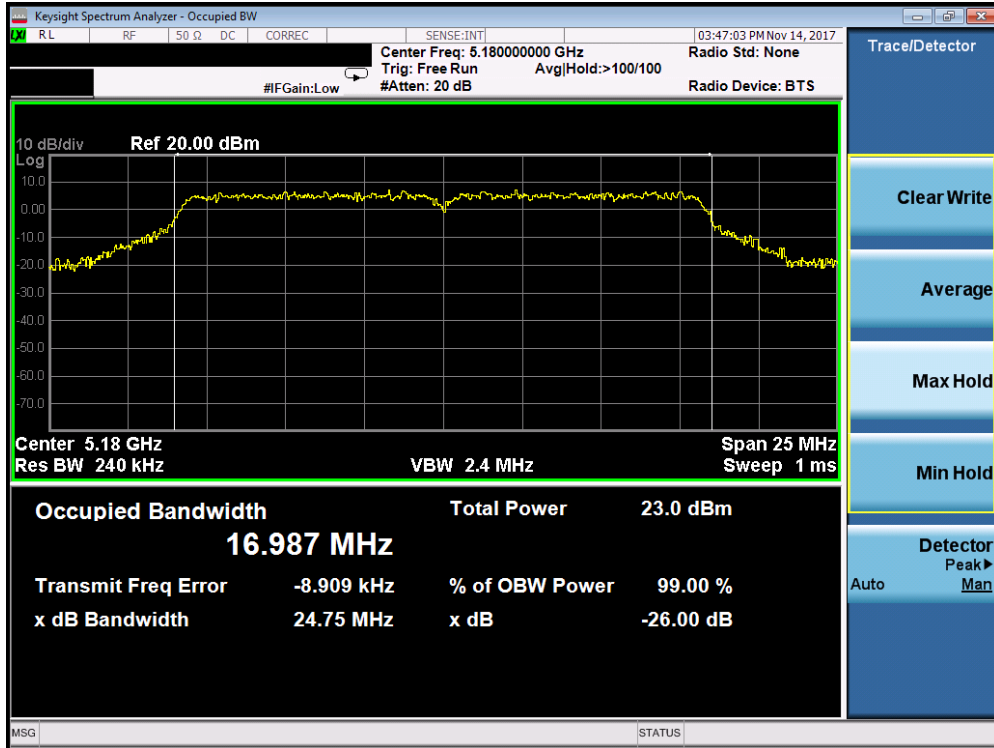


Plot 7-30. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

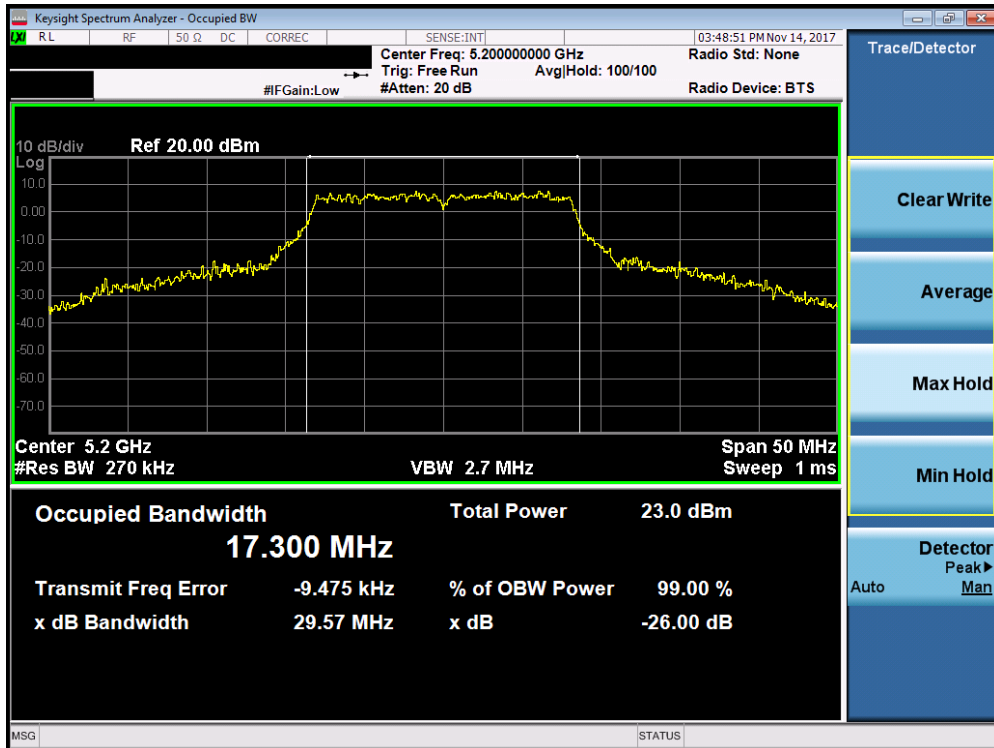


Plot 7-31. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 32 of 200

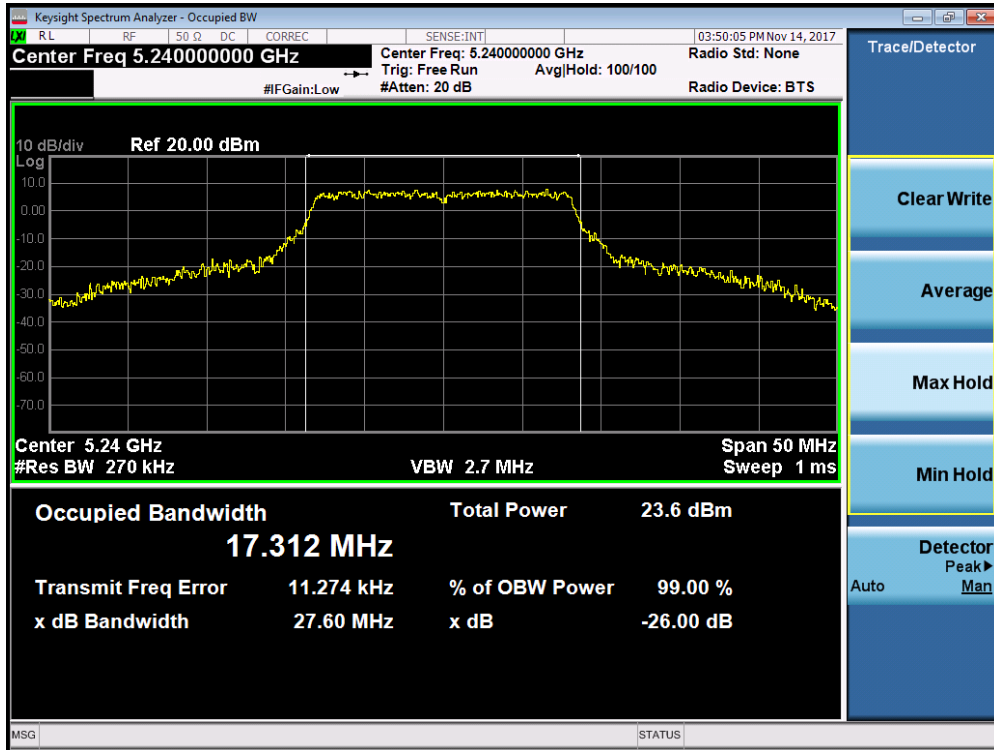


Plot 7-32. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

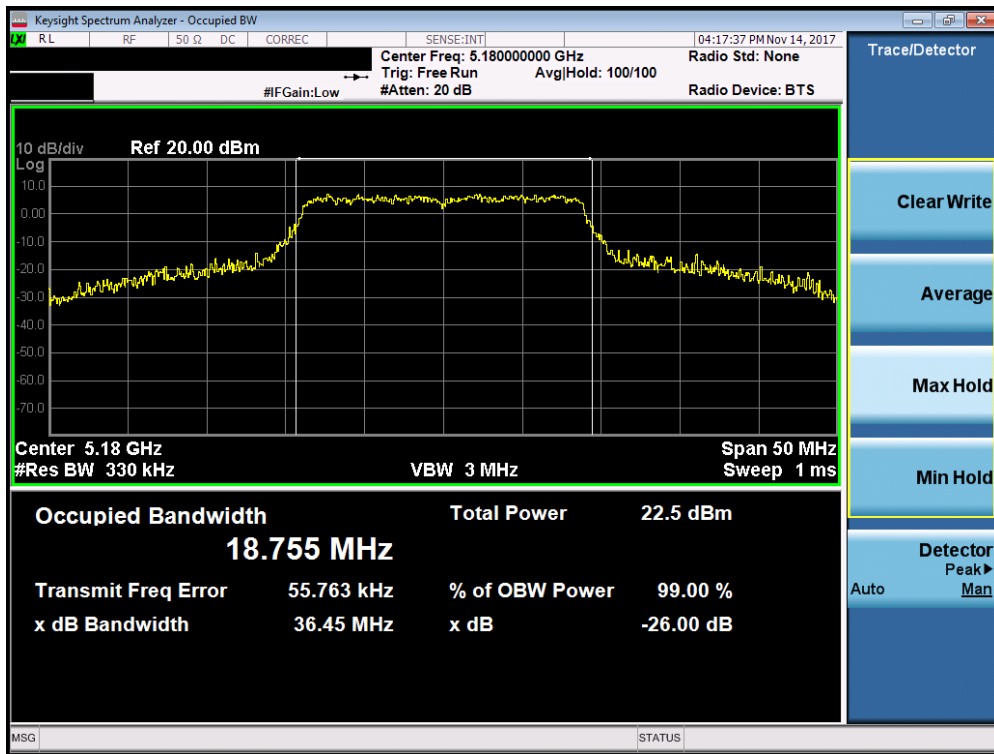


Plot 7-33. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 33 of 200

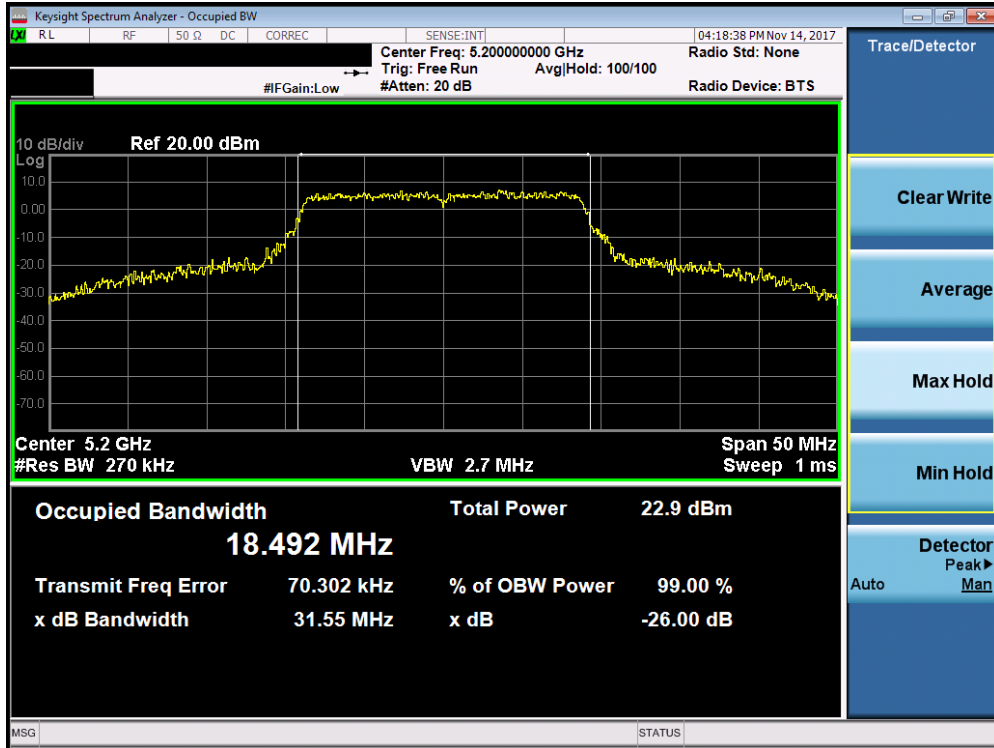


Plot 7-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

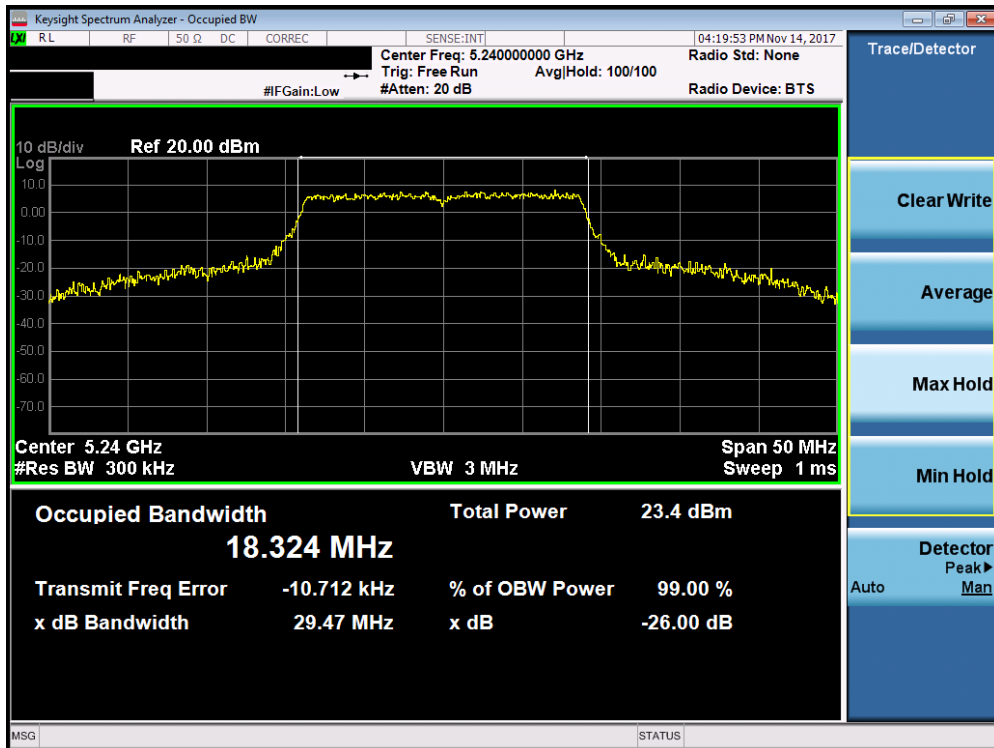


Plot 7-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 34 of 200

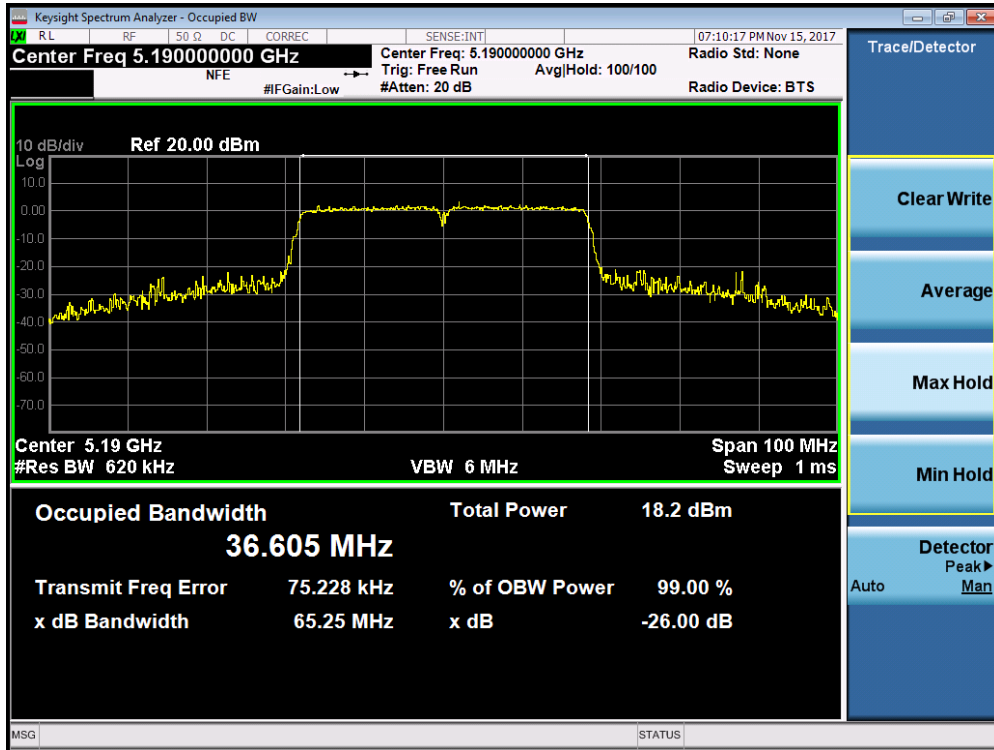


Plot 7-36. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

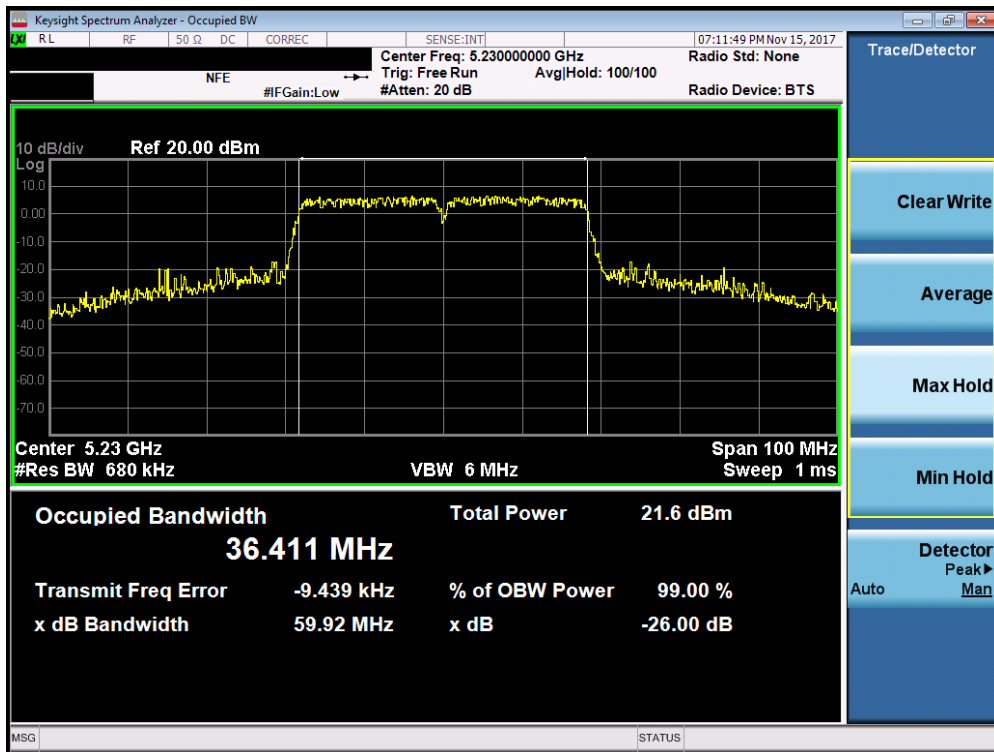


Plot 7-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 35 of 200

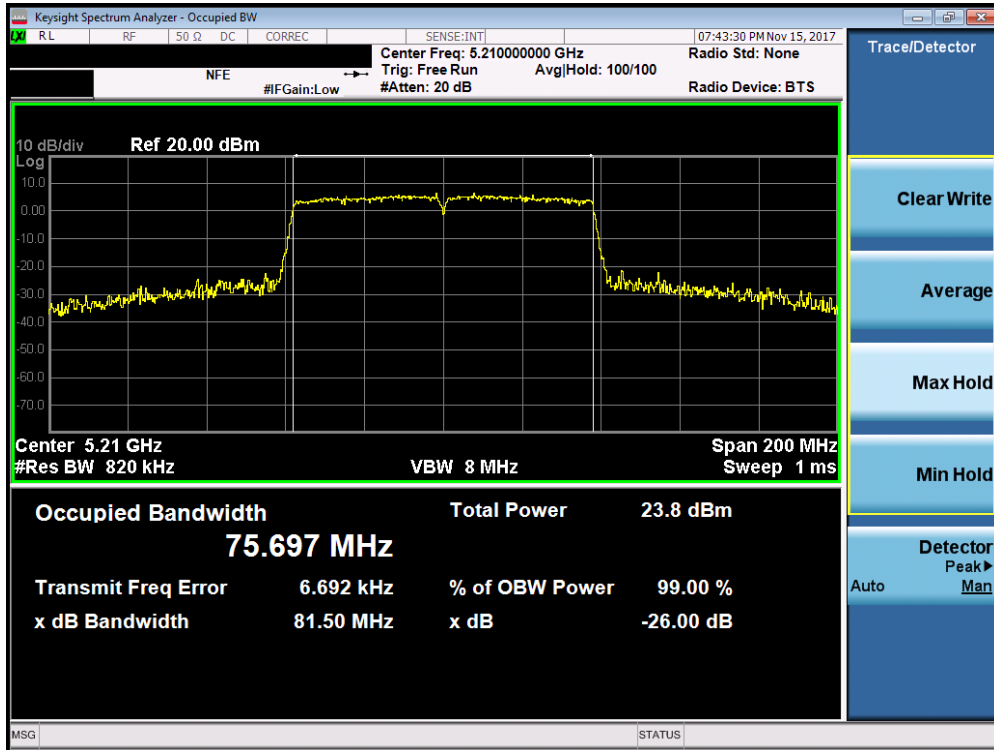


Plot 7-38. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

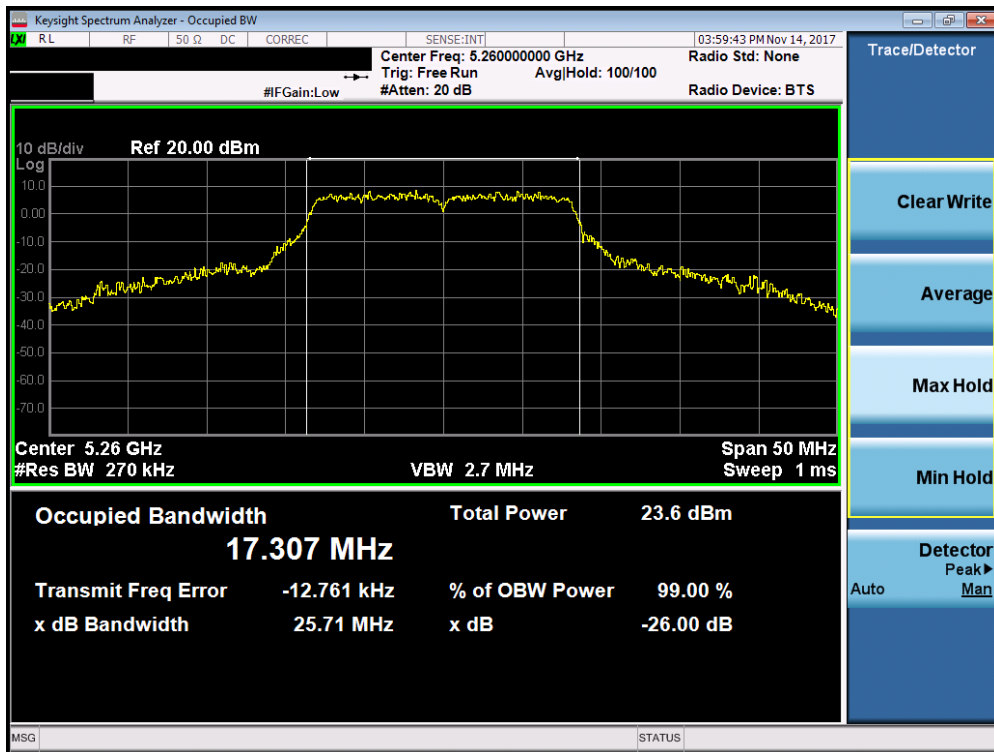


Plot 7-39. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 36 of 200



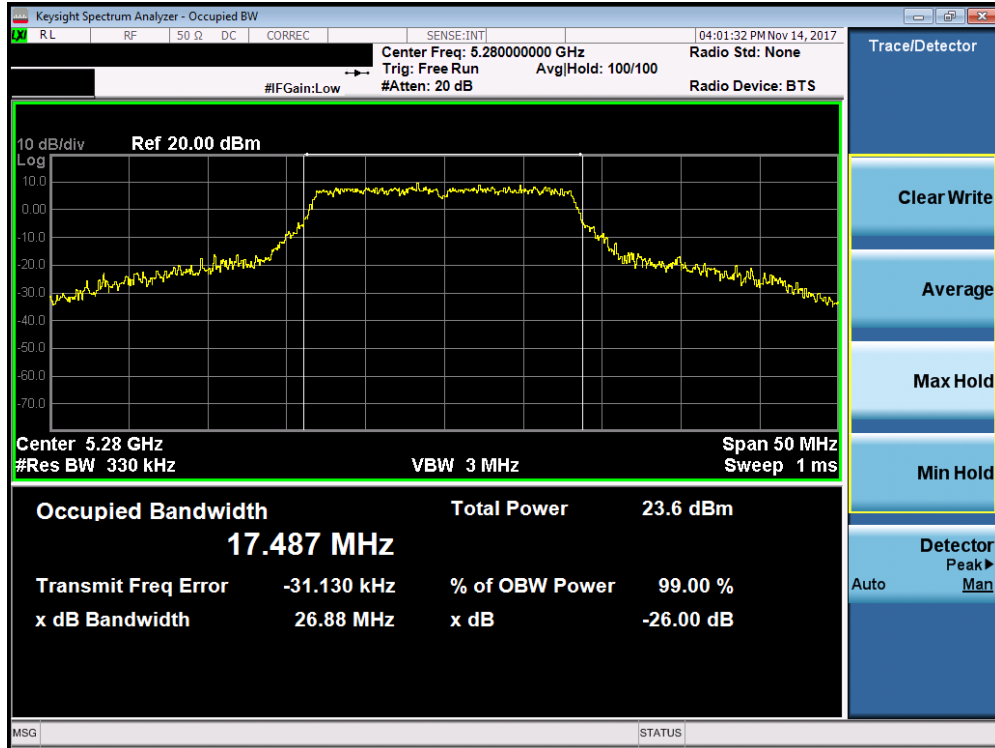


Plot 7-40. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

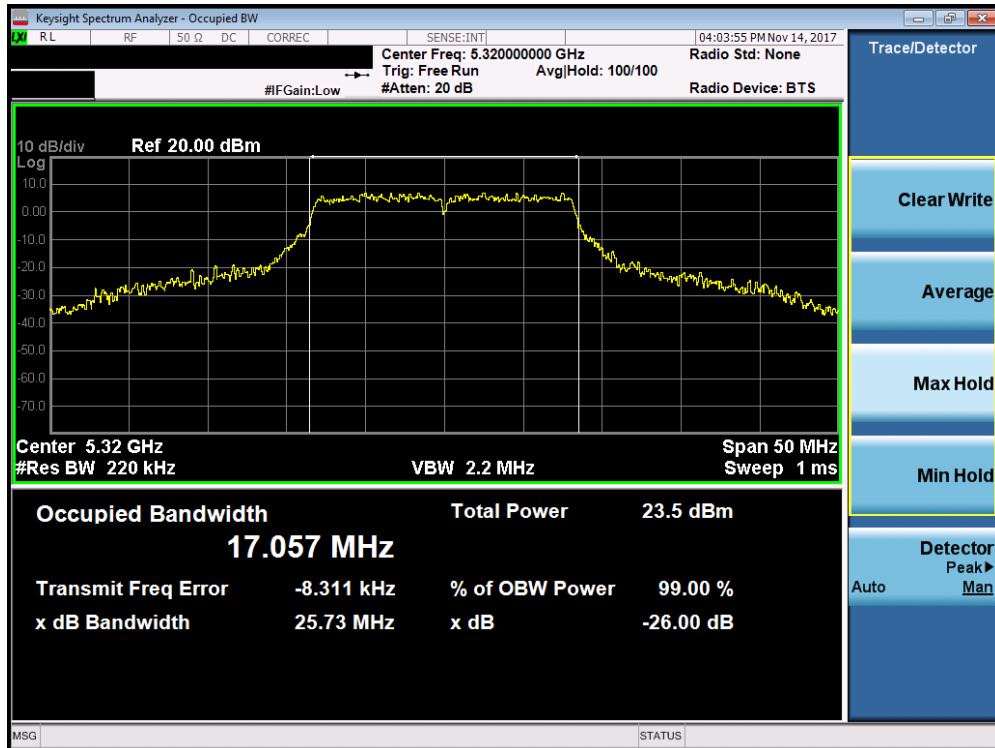


Plot 7-41. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 37 of 200



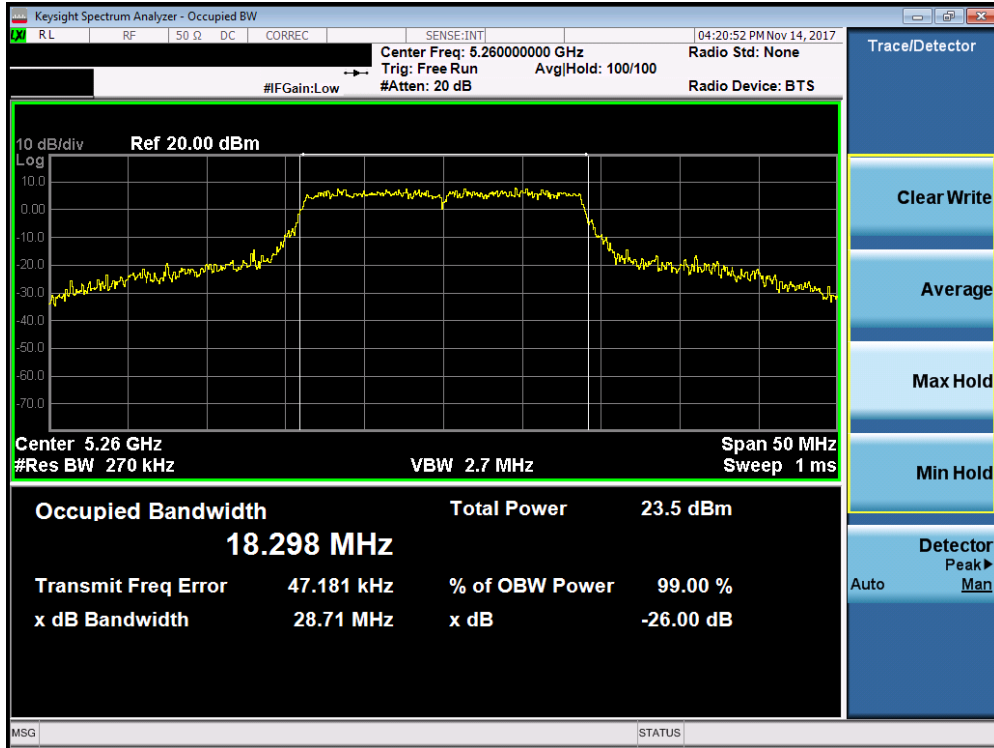


Plot 7-42. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

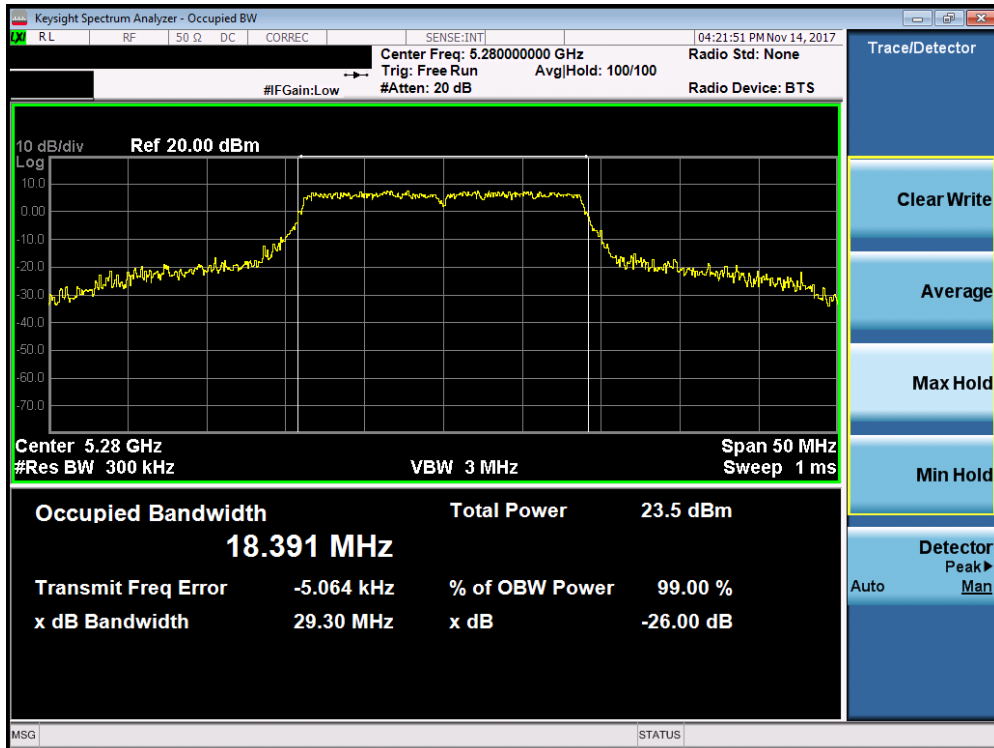


Plot 7-43. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 38 of 200

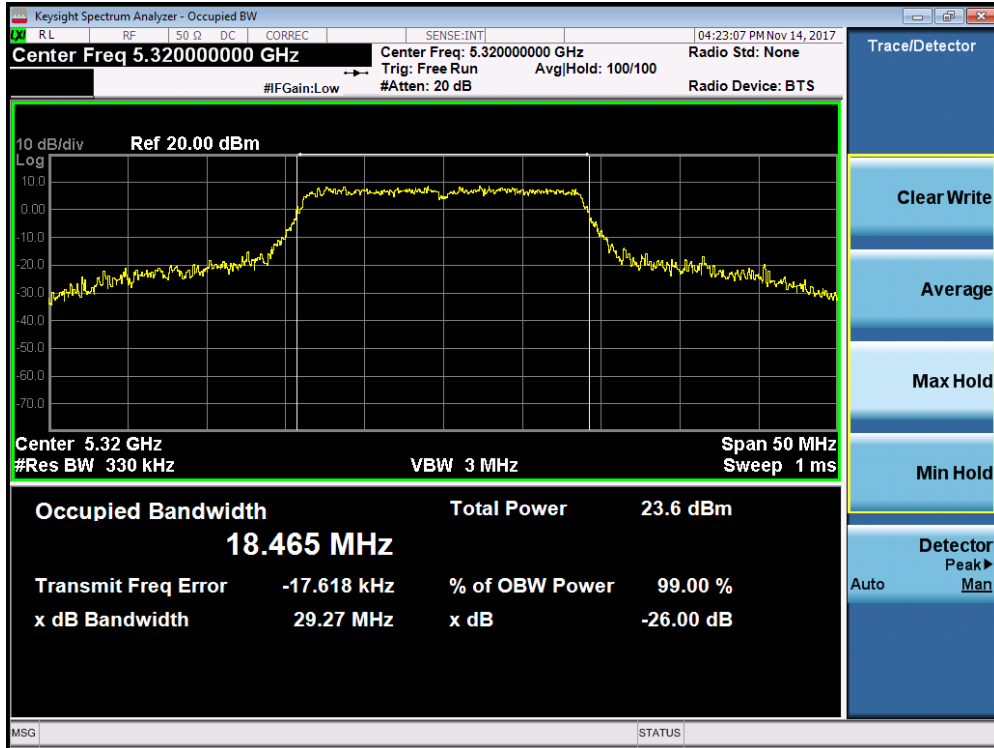


Plot 7-44. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

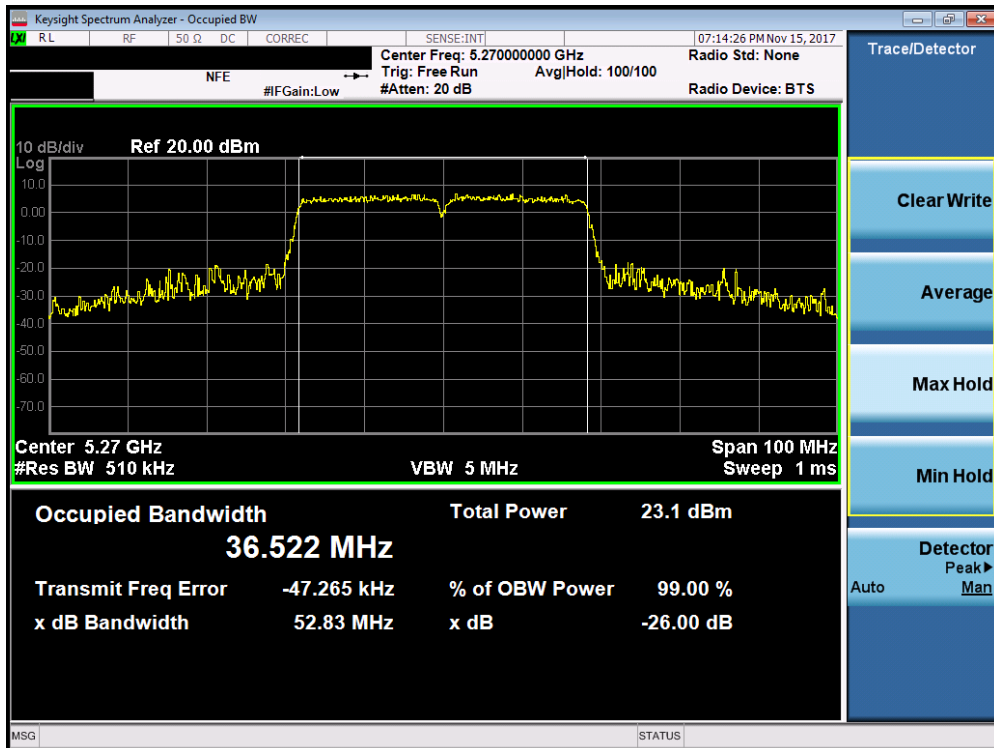


Plot 7-45. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 39 of 200

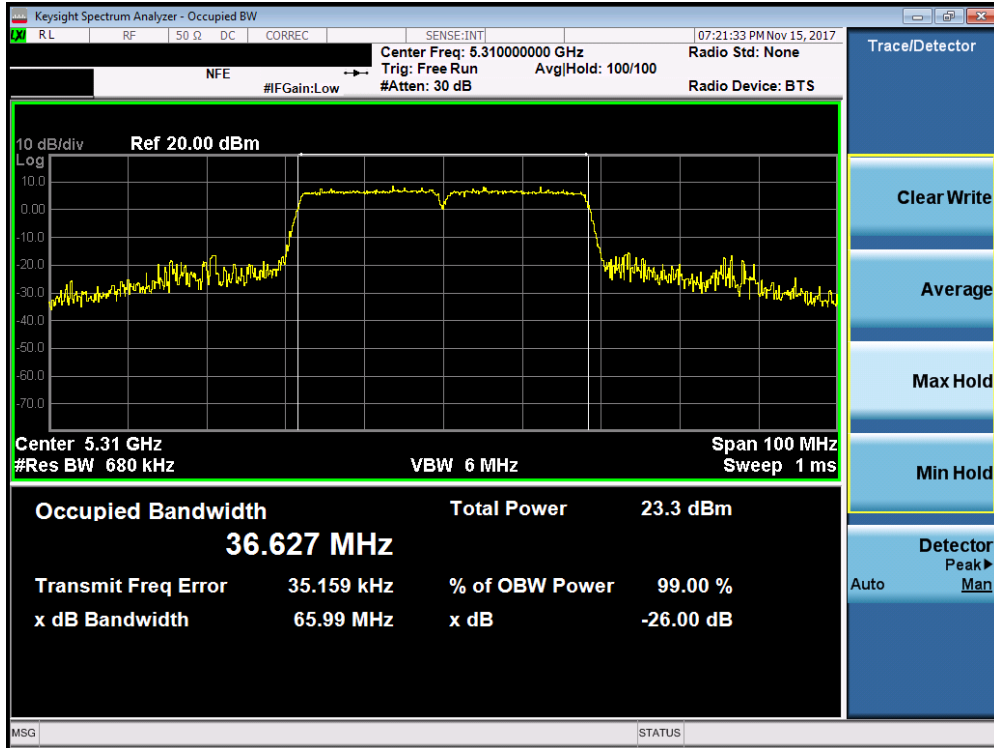


Plot 7-46. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

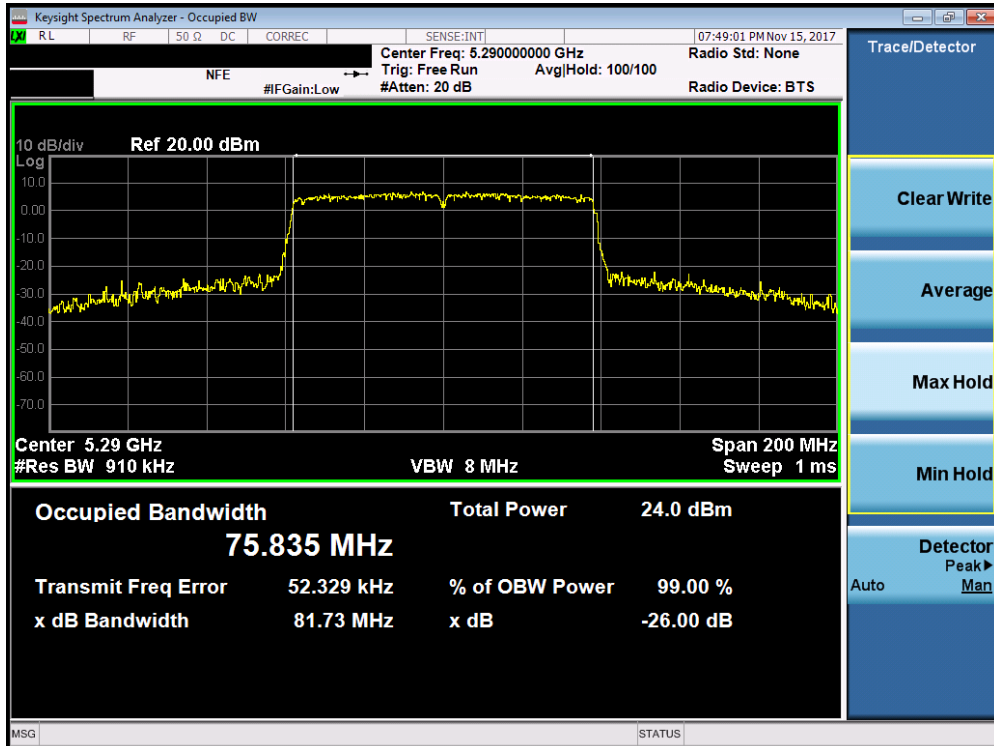


Plot 7-47. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 40 of 200

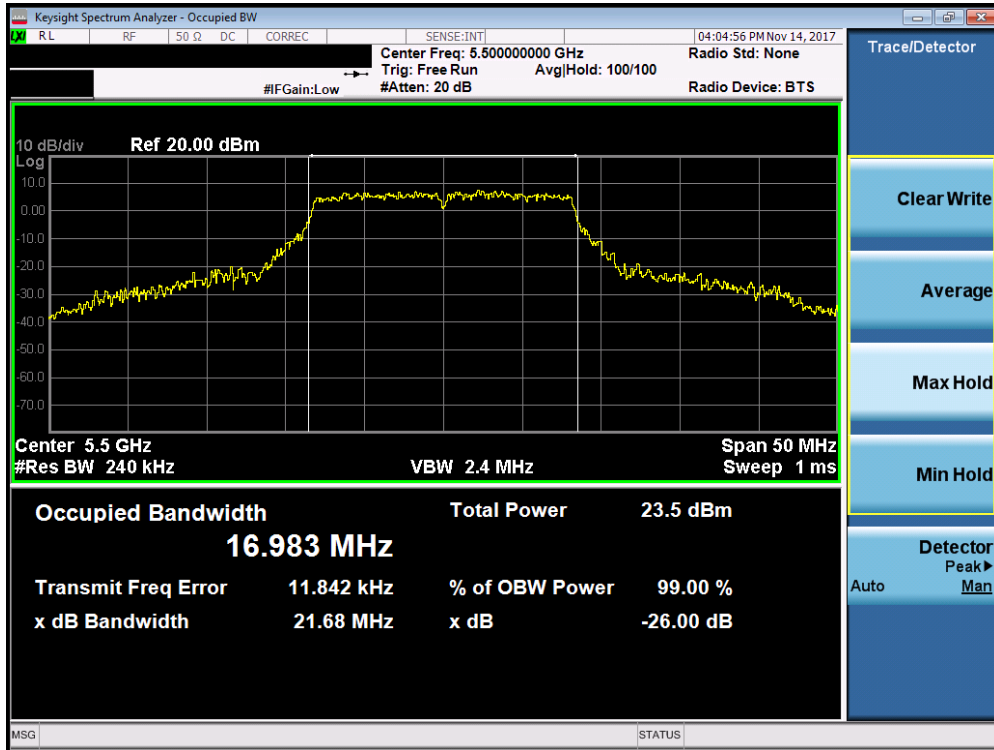


Plot 7-48. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

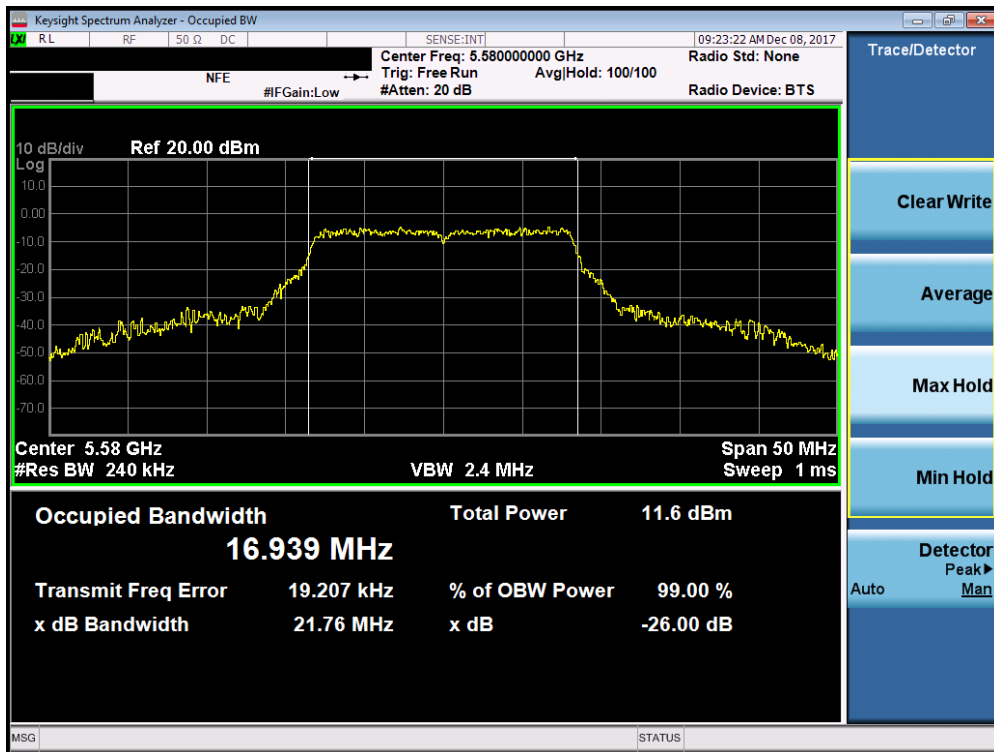


Plot 7-49. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 41 of 200

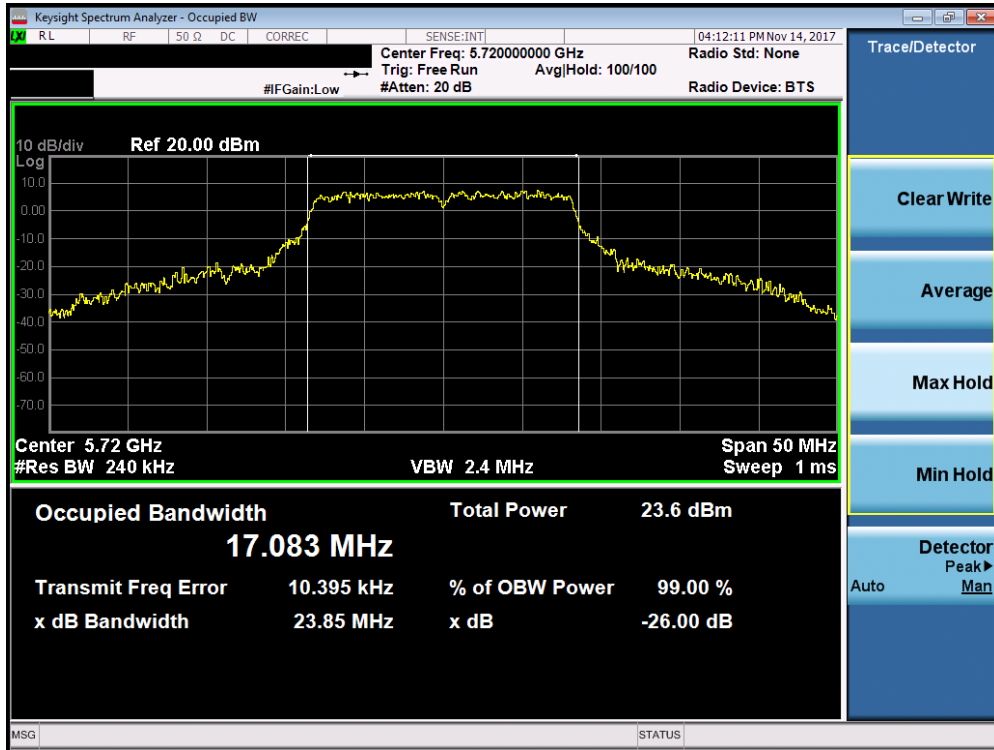


Plot 7-50. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

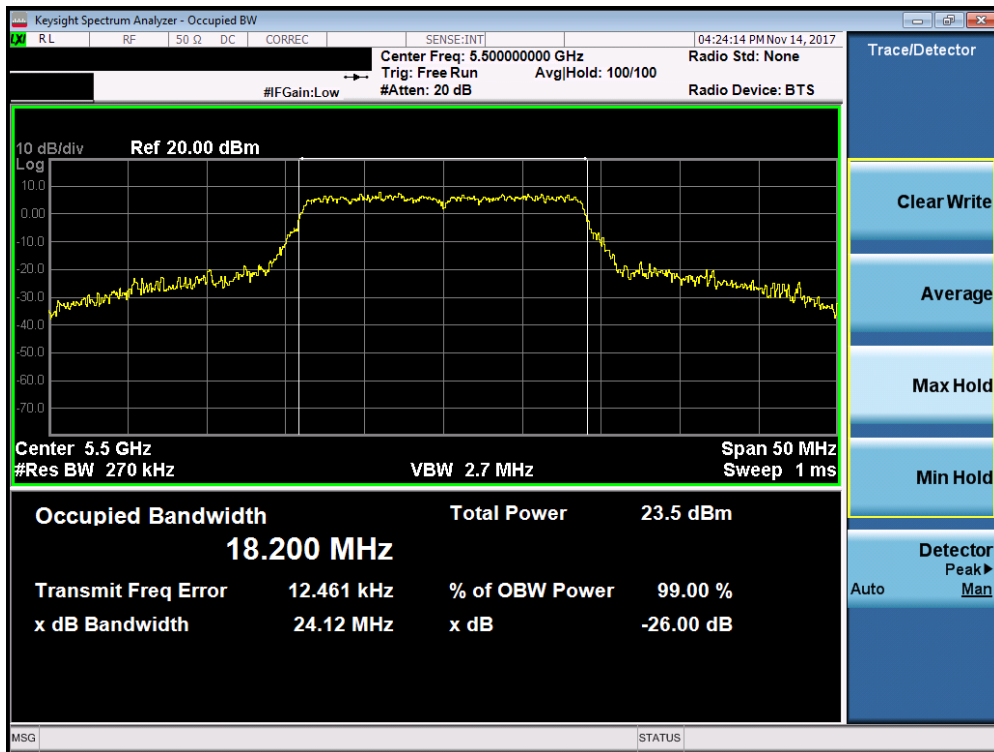


Plot 7-51. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 42 of 200

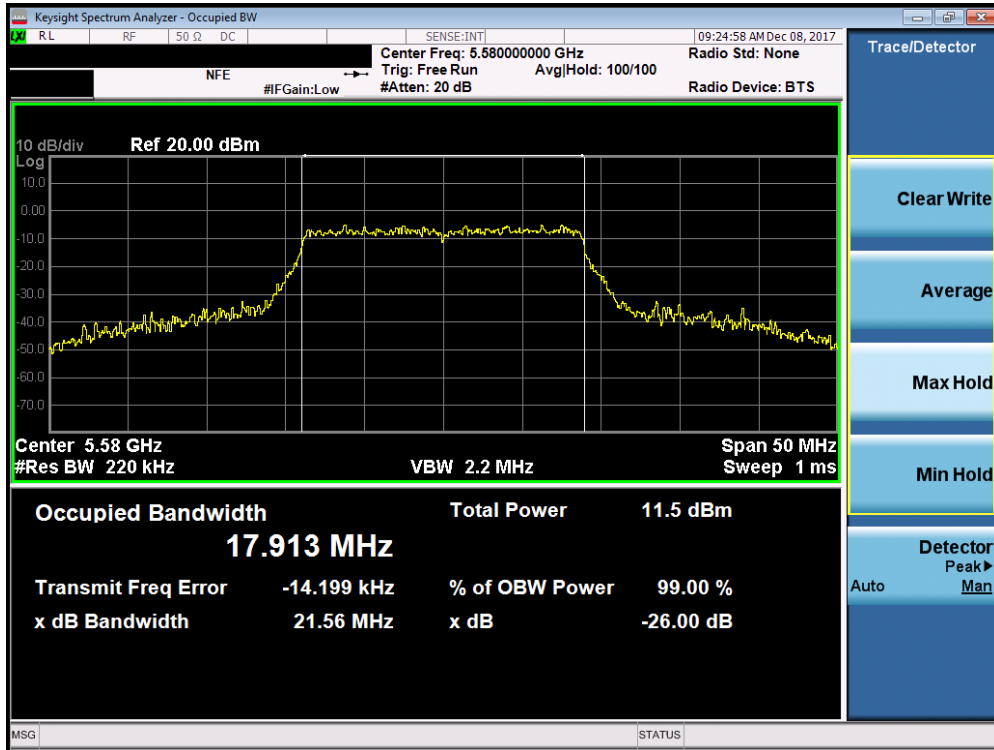


Plot 7-52. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

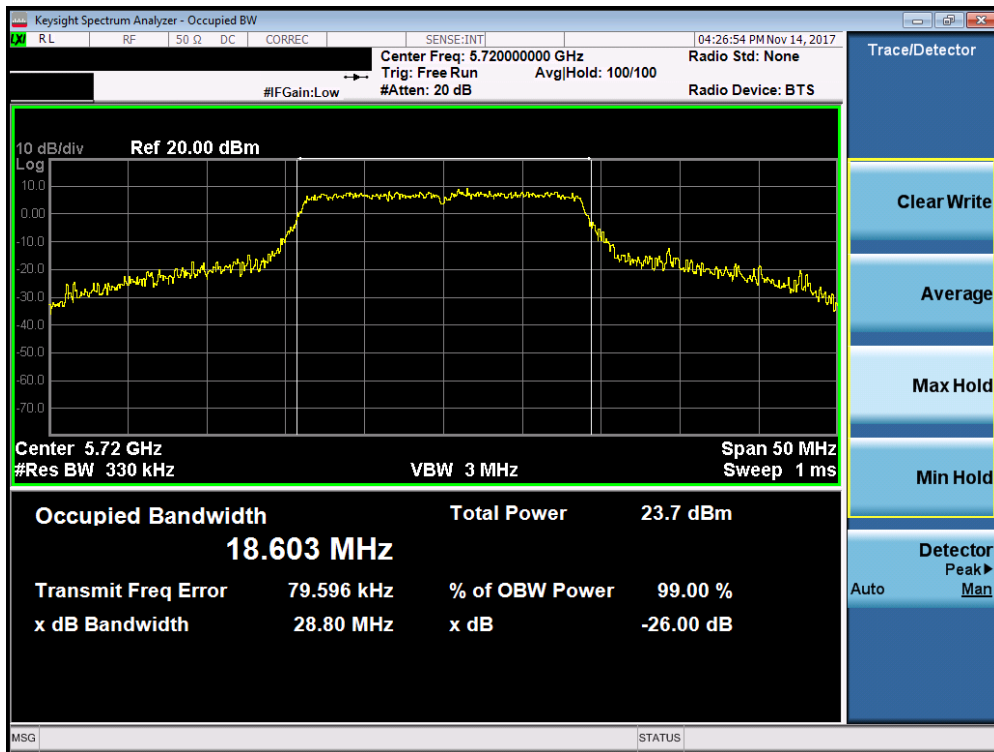


Plot 7-53. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 43 of 200



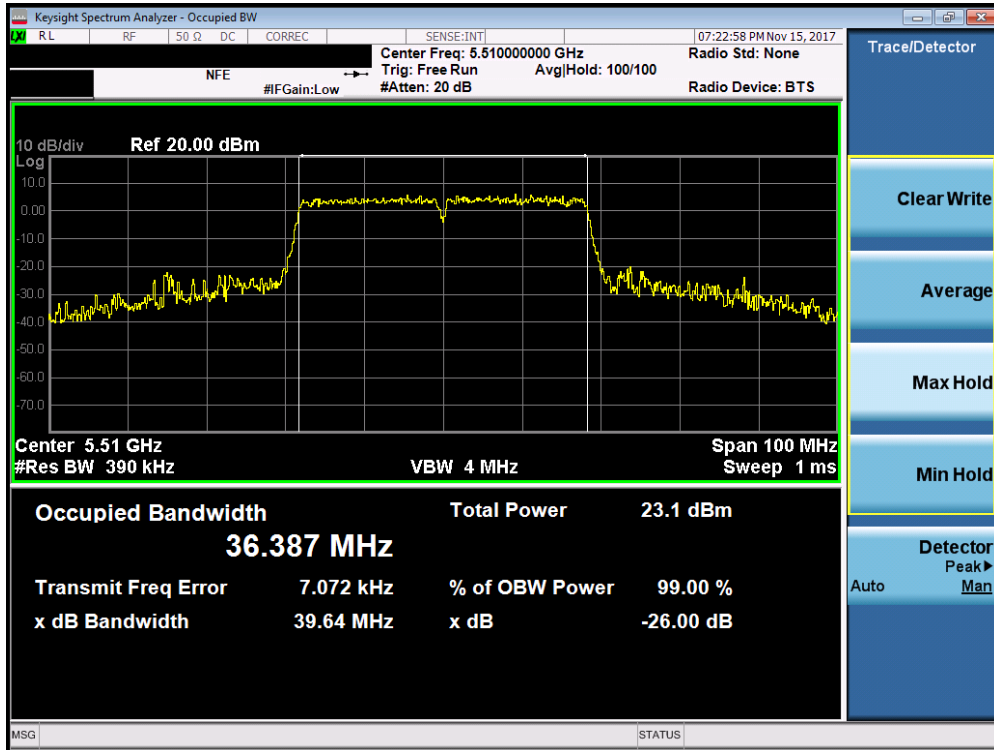


Plot 7-54. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

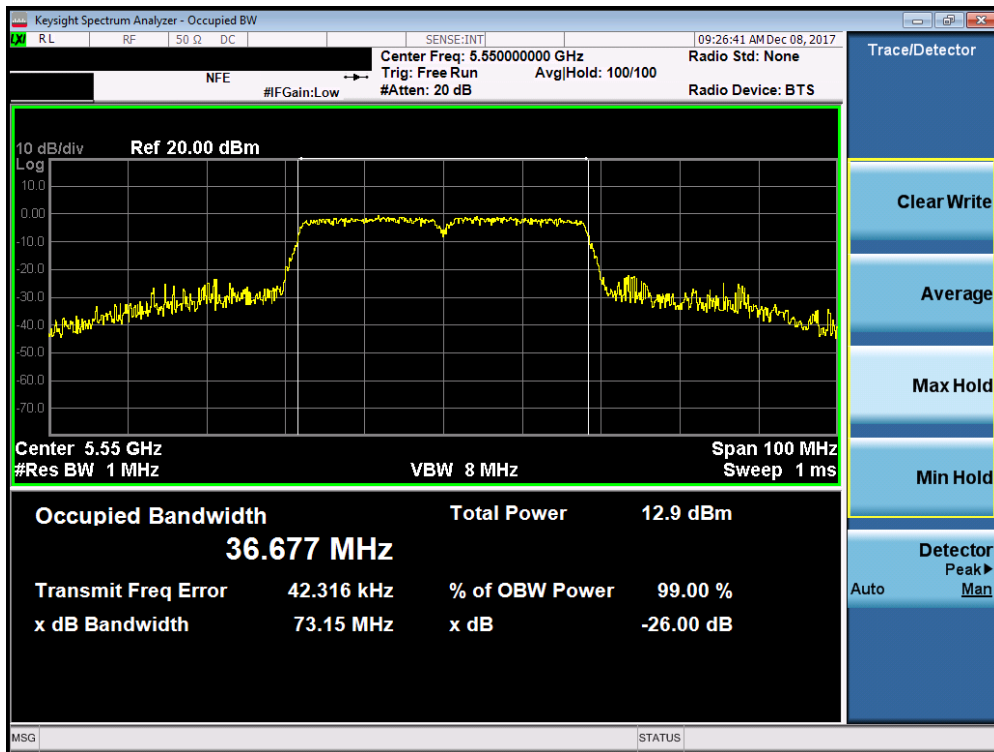


Plot 7-55. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 44 of 200



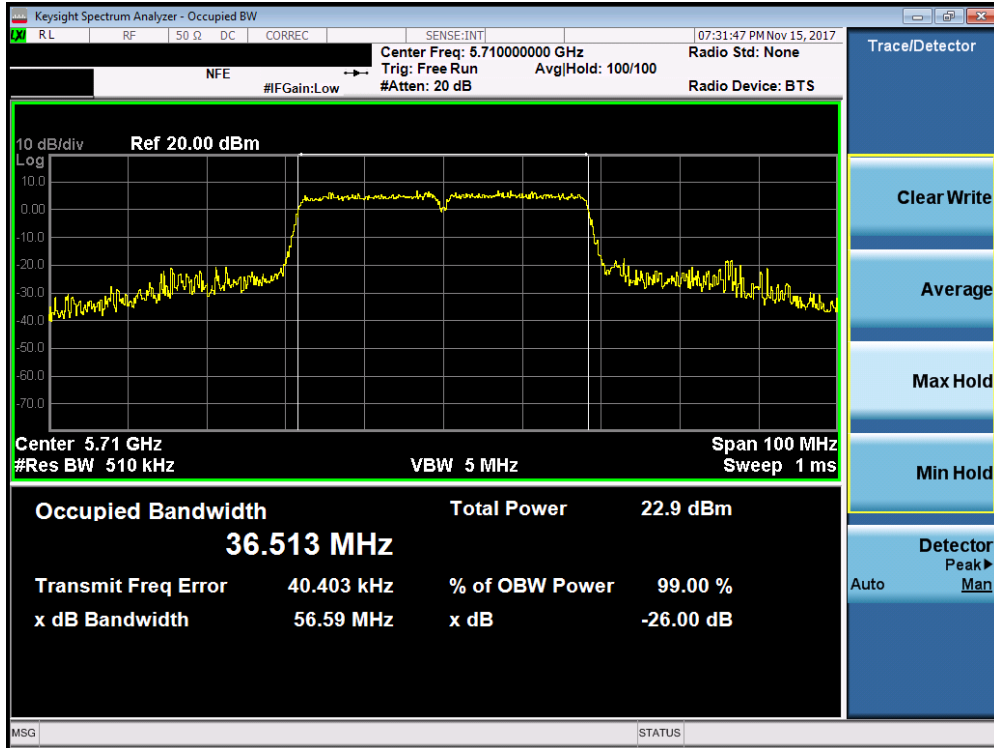


Plot 7-56. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

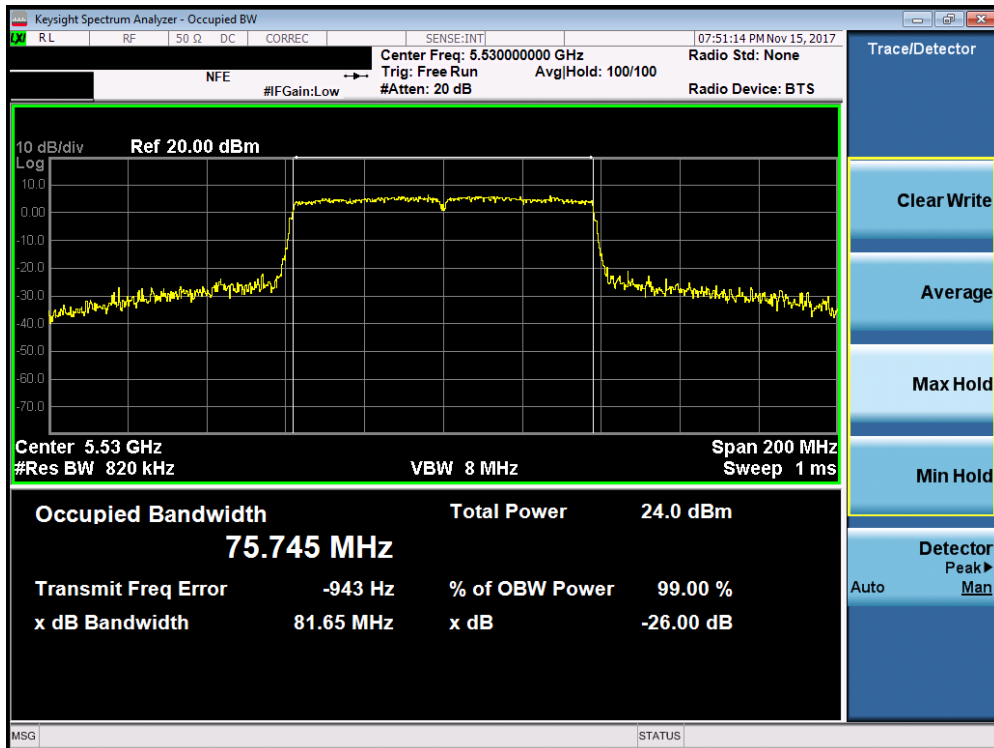

Plot 7-57. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 45 of 200

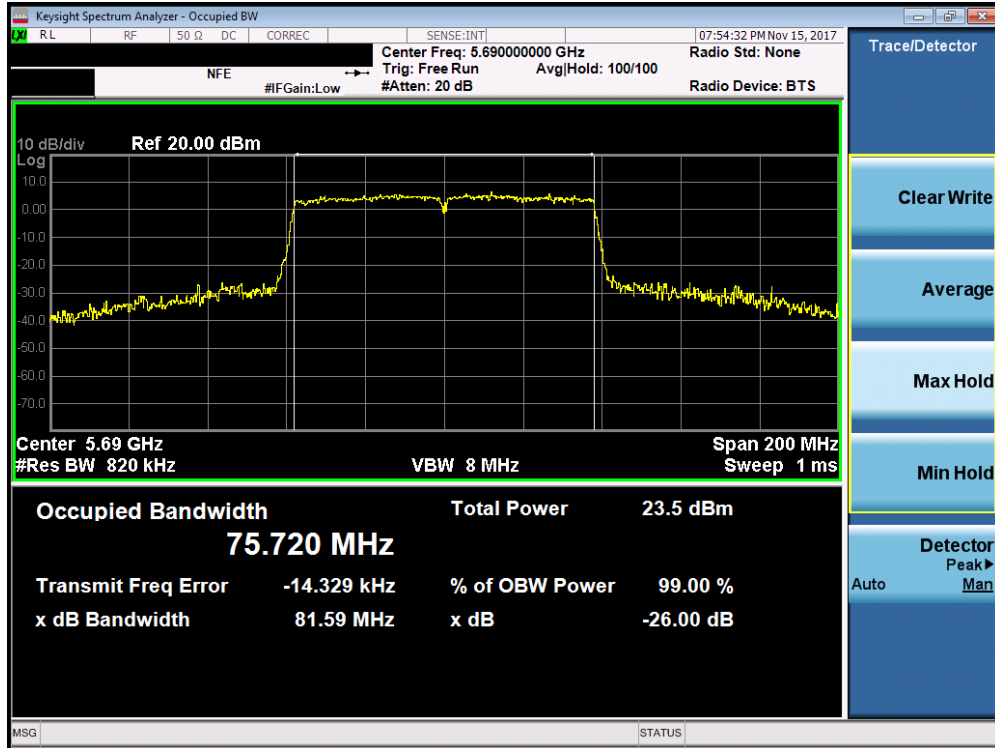

Plot 7-58. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 46 of 200

### 7.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e); RSS-Gen [6.2]

#### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.***

#### Test Procedure Used


ANSI C63.10-2013 – Section 6.9.2  
KDB 789033 D02 v02 – Section C

#### Test Settings

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes


None.

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 47 of 200	

## Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	a	6	16.40
	5785	157	a	6	16.37
	5825	165	a	6	16.38
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.64
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.65
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.66
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.35
	5805	161	n (40MHz)	13.5/15 (MCS0)	36.27
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.63

Table 7-4. Conducted Bandwidth Measurements

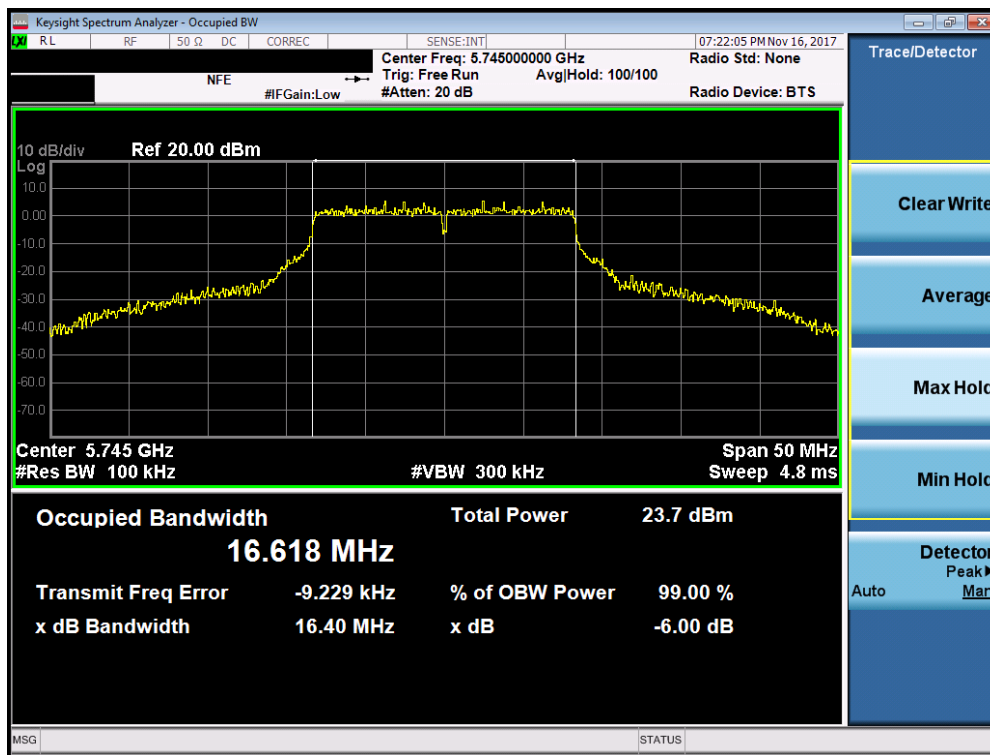


Plot 7-59. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 48 of 200

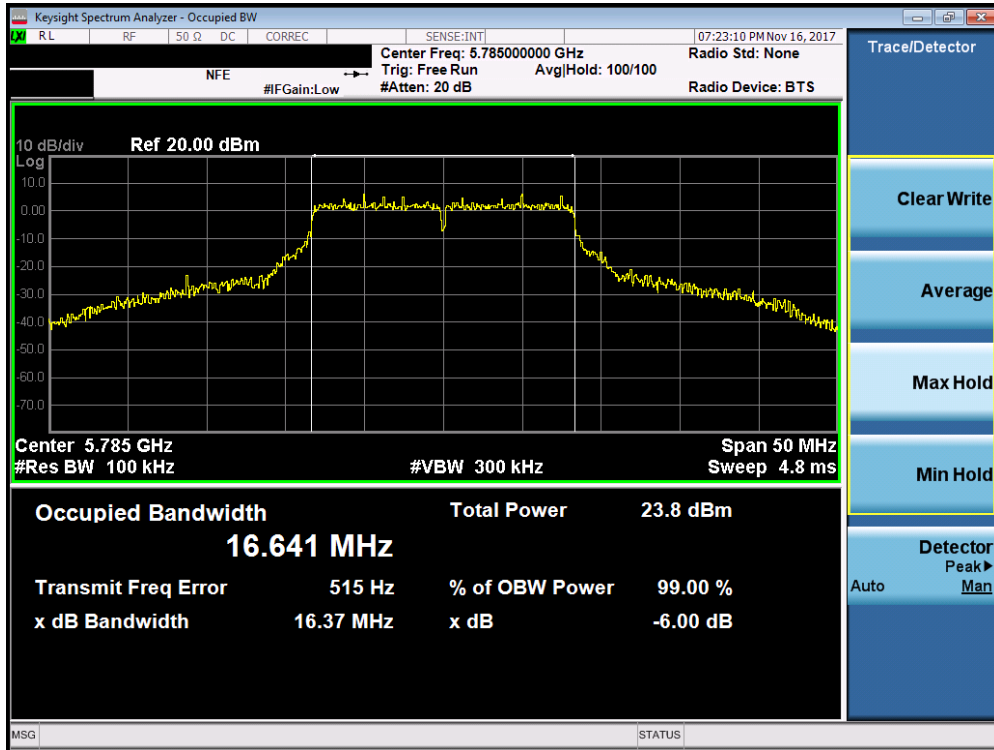


Plot 7-60. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

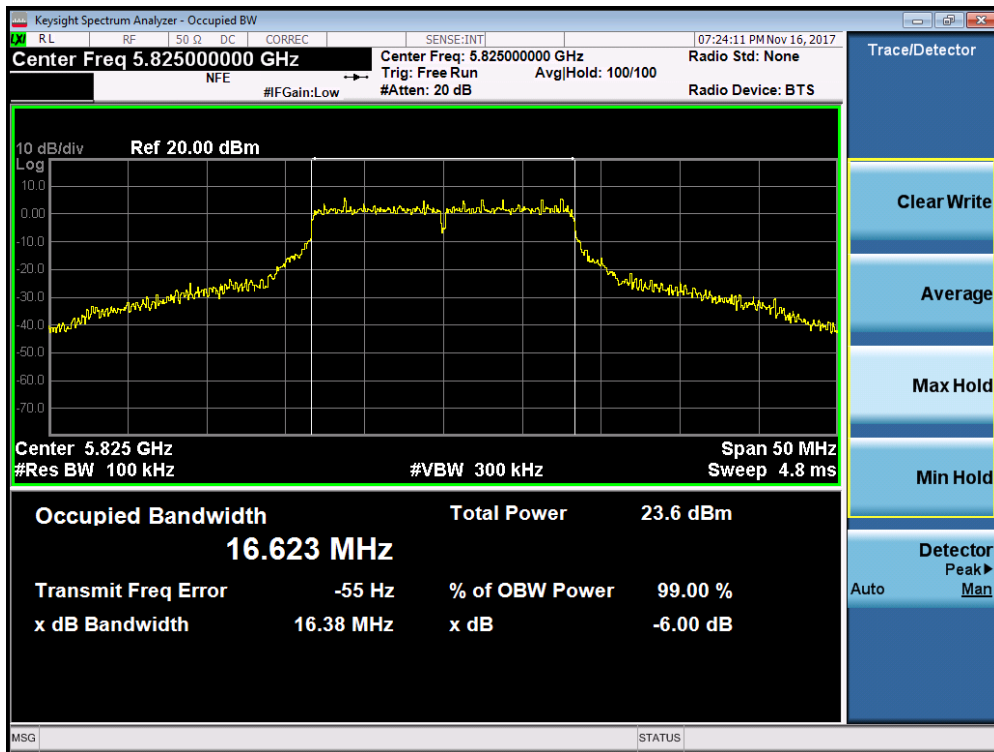


Plot 7-61. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 49 of 200

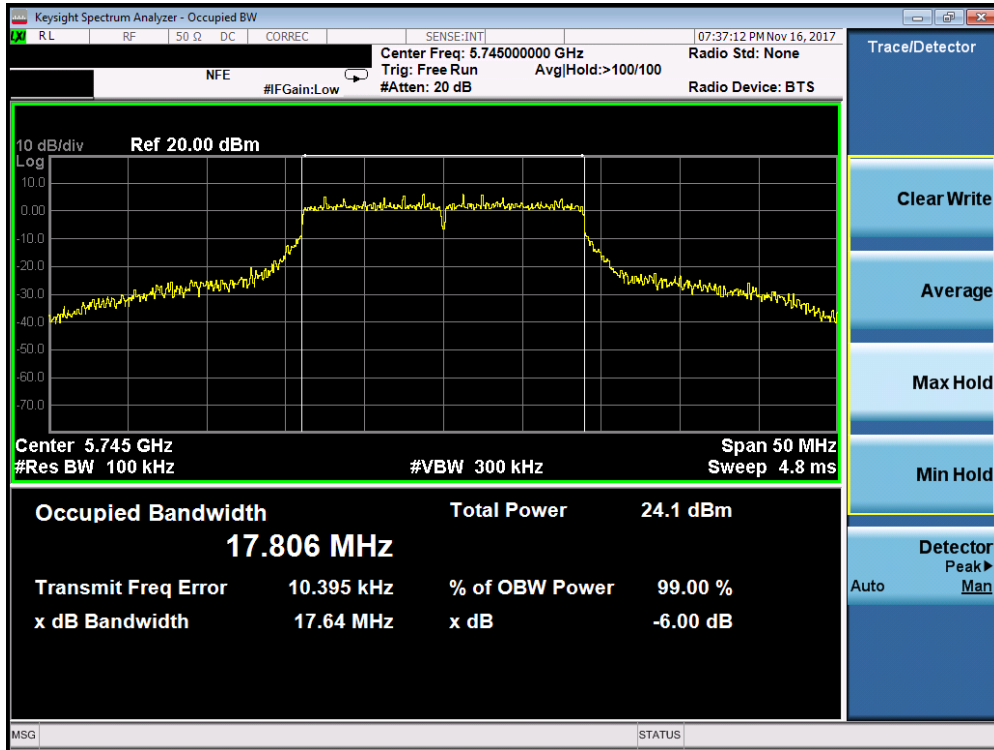


Plot 7-62. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

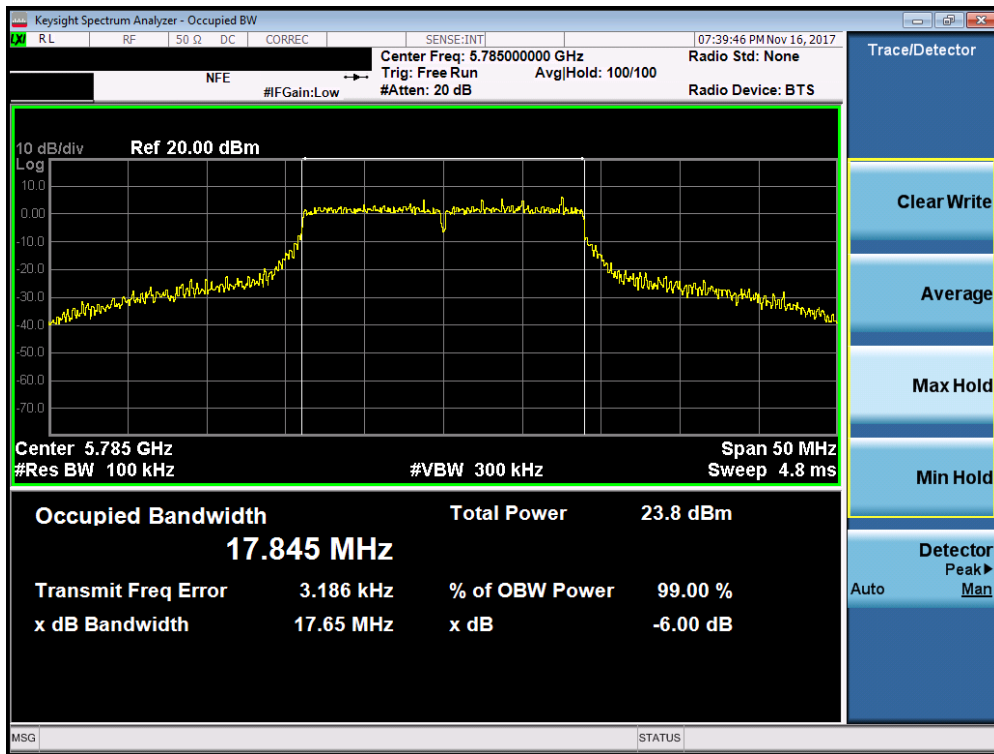


Plot 7-63. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 50 of 200

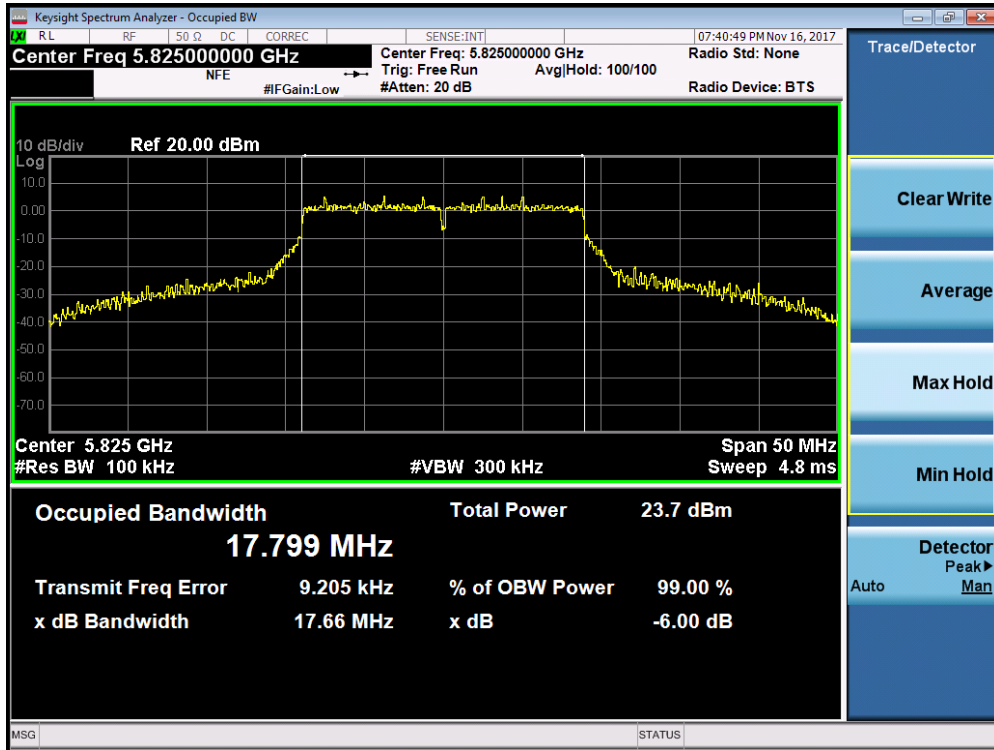


Plot 7-64. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

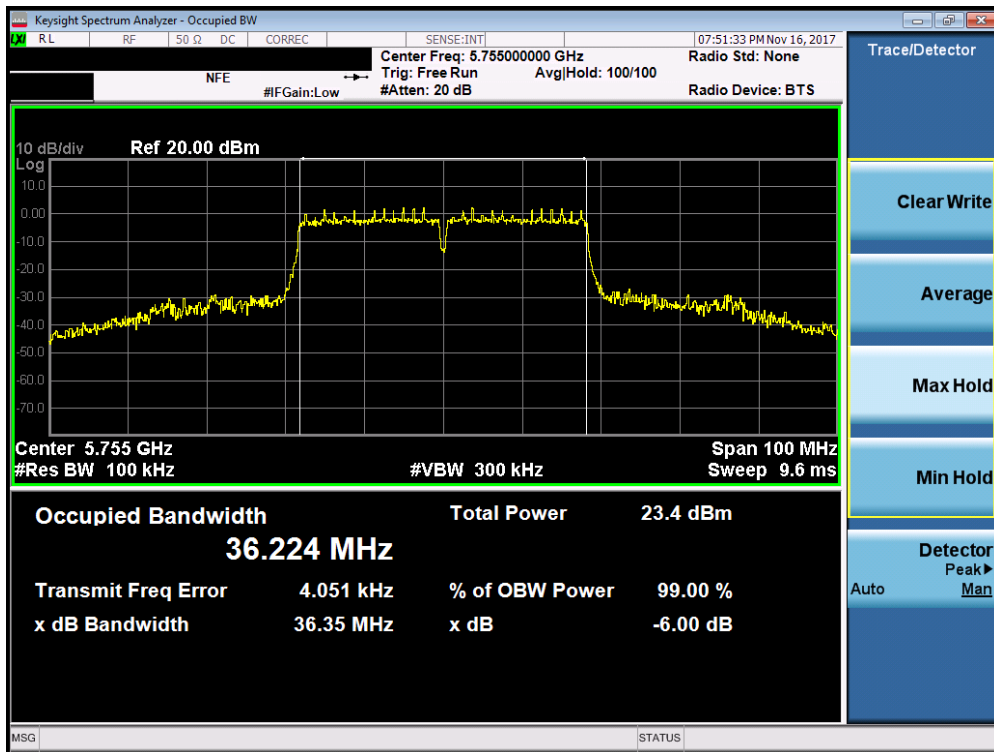


Plot 7-65. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 51 of 200



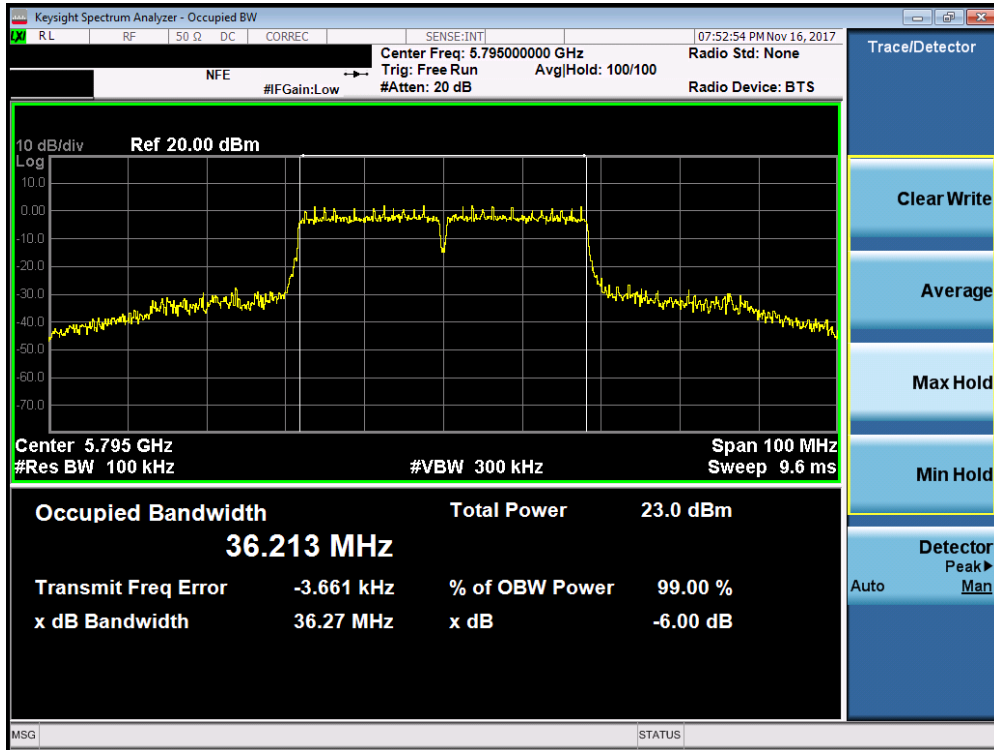

Plot 7-66. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 161)

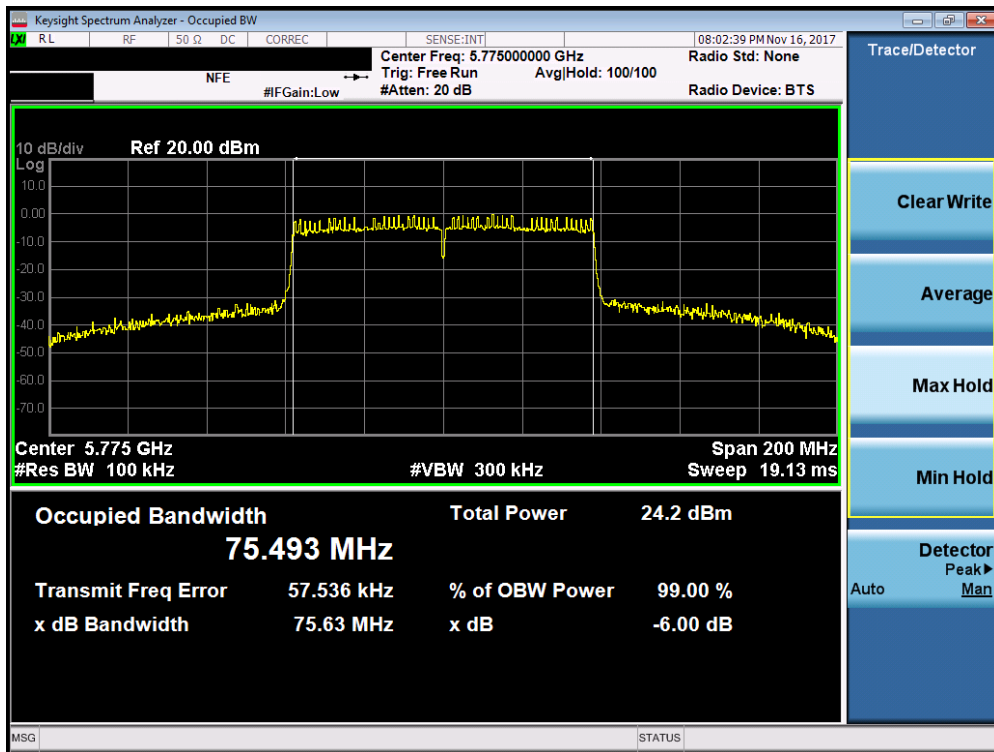


Plot 7-67. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 52 of 200

## Antenna-2 6dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	a	6	16.38
	5785	157	a	6	16.37
	5825	165	a	6	16.38
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.64
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.63
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.64
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.32
	5805	161	n (40MHz)	13.5/15 (MCS0)	36.42
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.76

**Table 7-5. Conducted Bandwidth Measurements**

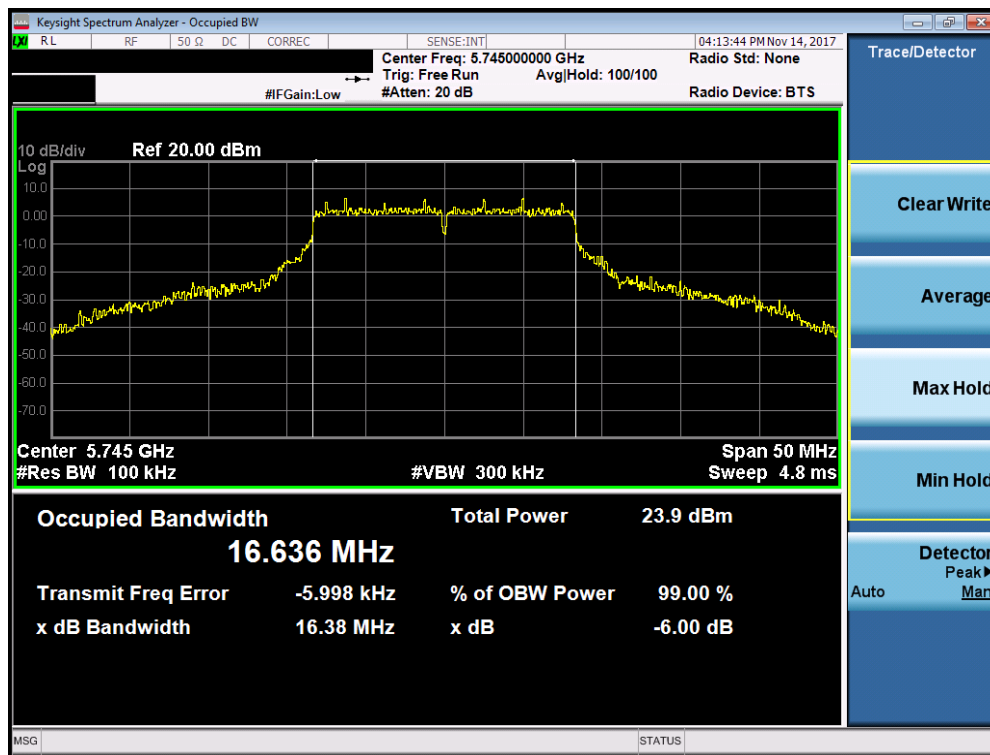


**Plot 7-68. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)**

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 53 of 200

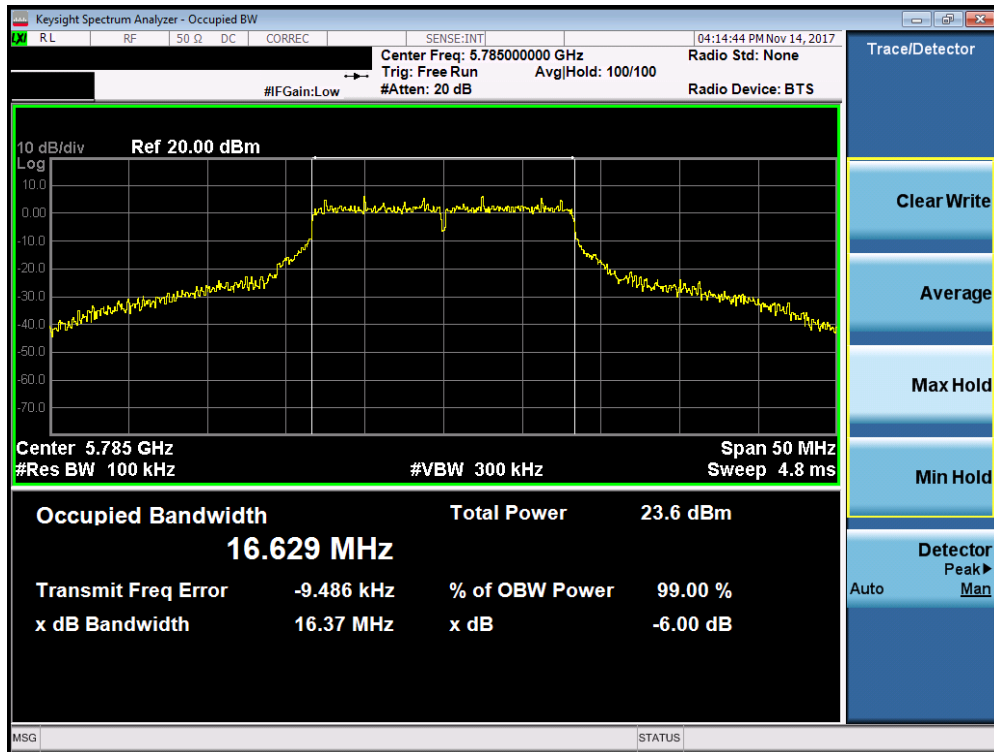


Plot 7-69. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

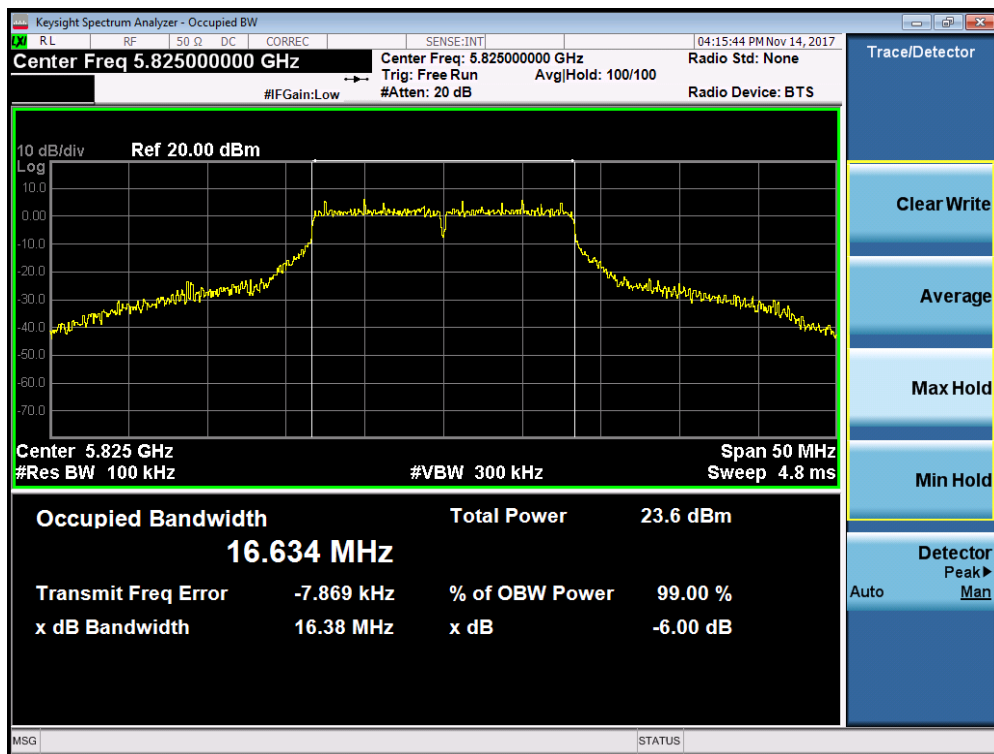


Plot 7-70. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 54 of 200

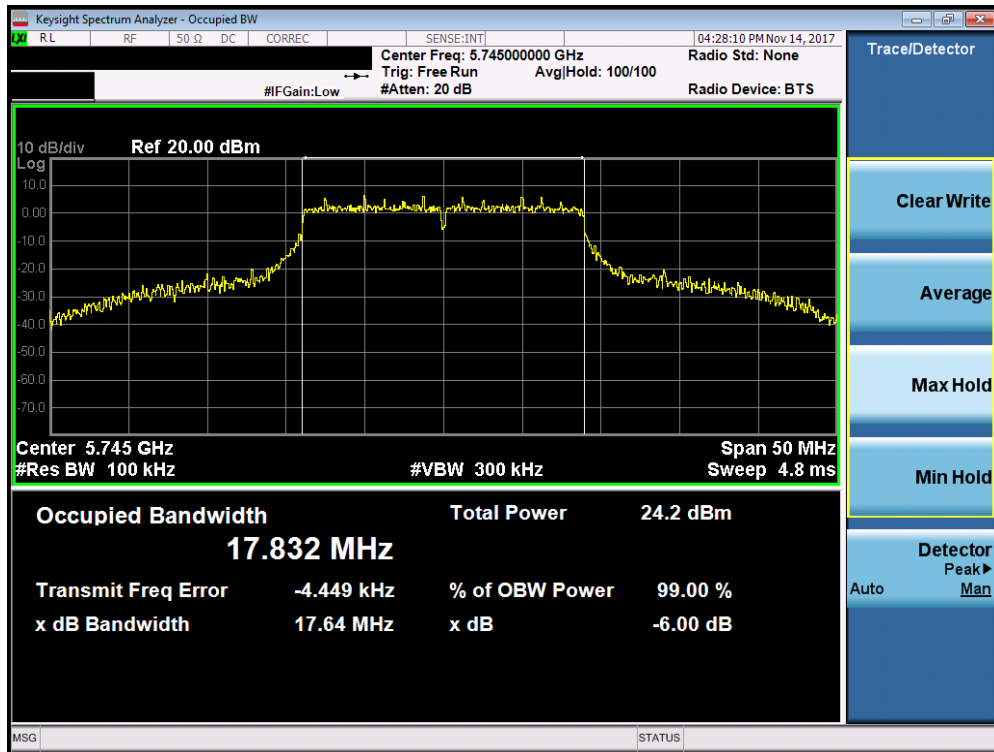


Plot 7-71. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

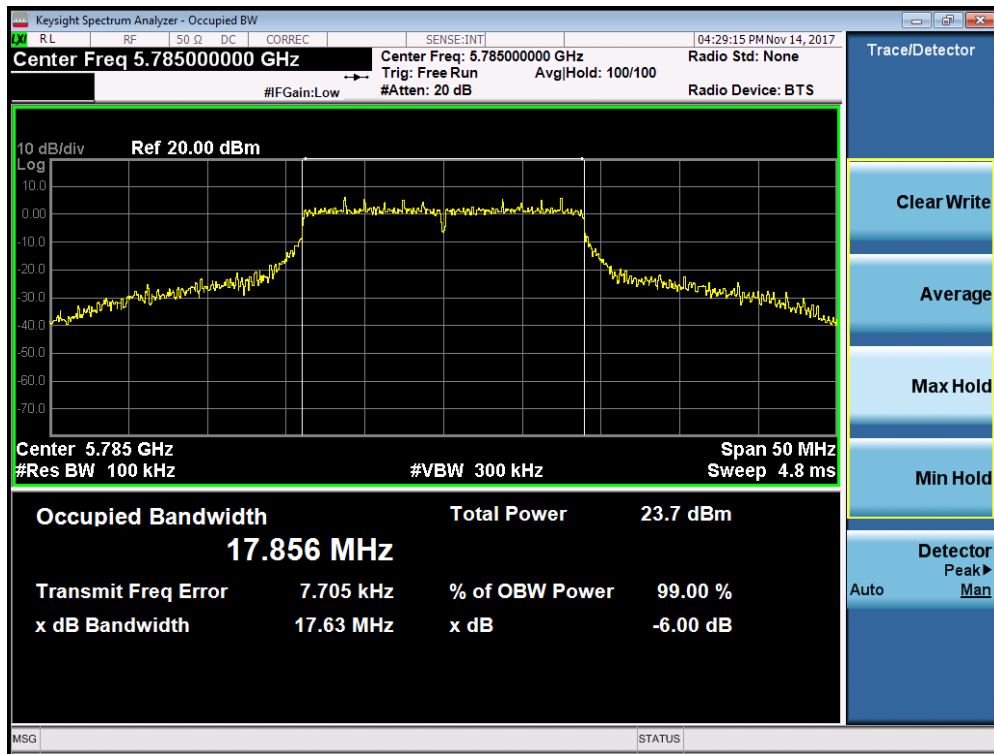


Plot 7-72. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 55 of 200

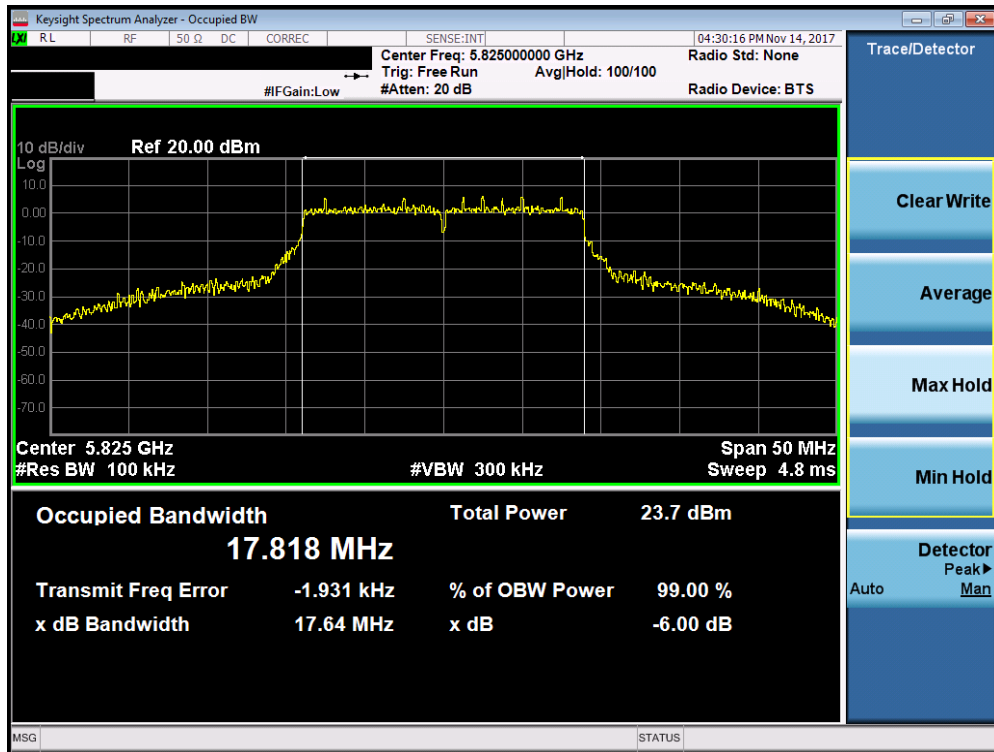


Plot 7-73. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

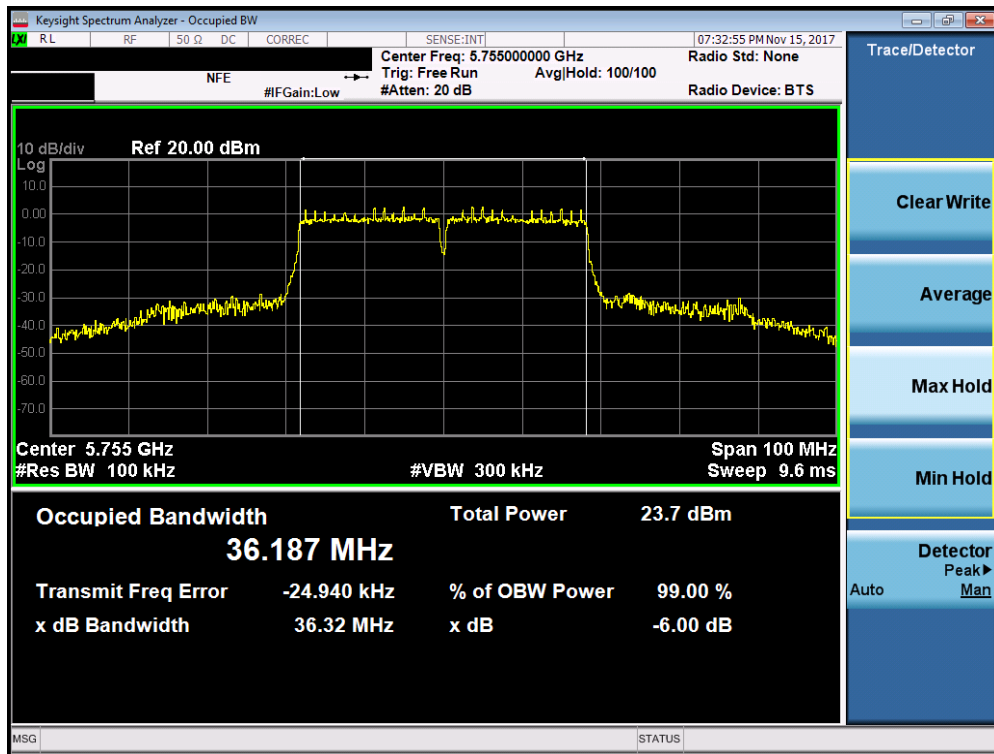


Plot 7-74. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 56 of 200

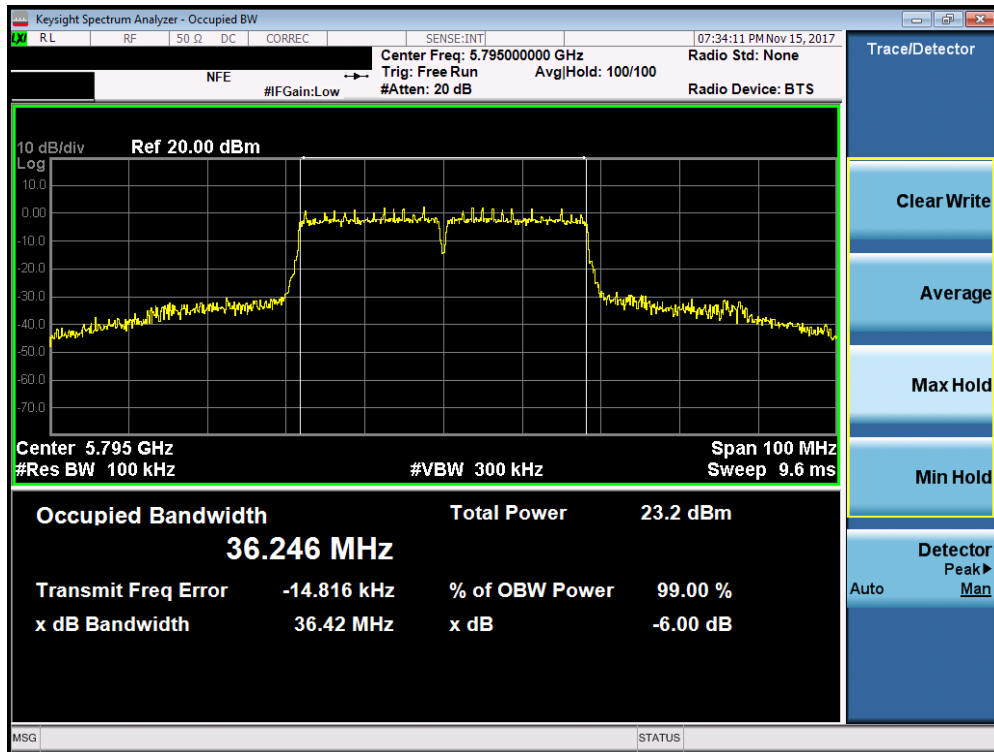

Plot 7-75. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 161)

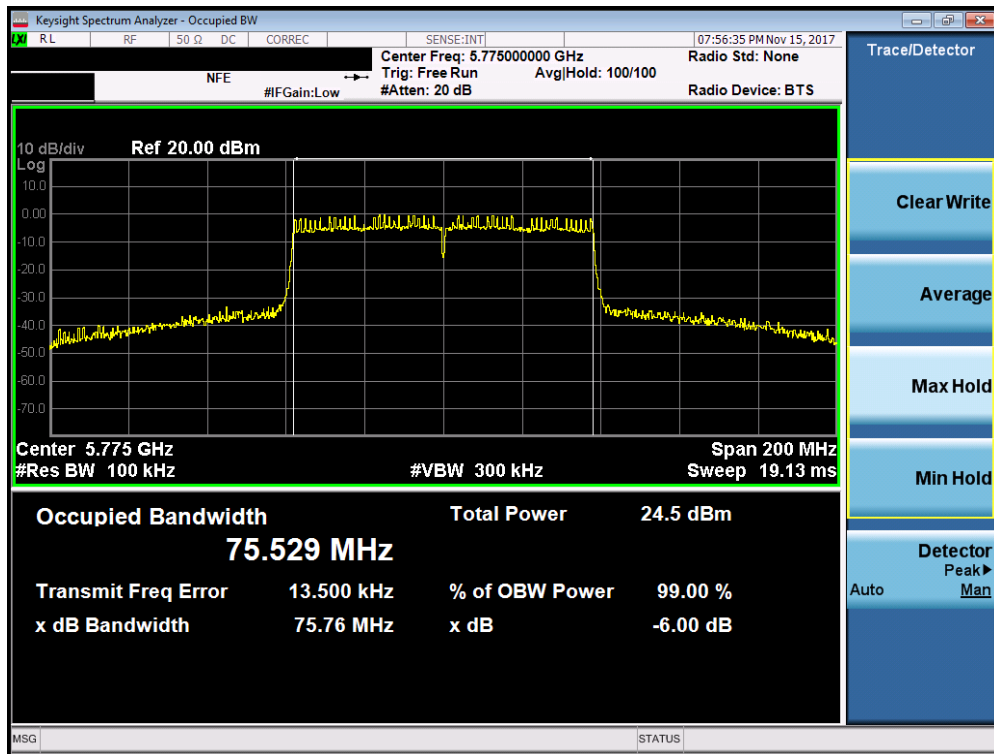

Plot 7-76. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG960U IC: 649E-SMG960U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 57 of 200



## 7.4 UNII Output Power Measurement – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02, and at the appropriate frequencies.

***In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. is the lesser of 200mW (23.01dBm) and  $10\text{dBm} + 10\log_{10}(23.99) = 23.80\text{ dBm}$ .***

***In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11\text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11\text{ dBm} + 10\log_{10}(22.99) = 24.62\text{ dBm}$ . The maximum e.i.r.p. is the lesser of 1W (30dBm) or  $17\text{ dBm} + 10\log_{10}(26\text{dB BW}) = 17\text{ dBm} + 10\log_{10}(22.99) = 41.62\text{ dBm}$ .***

***In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11\text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11\text{ dBm} + 10\log_{10}(21.26) = 24.28\text{dBm}$ . The maximum e.i.r.p. is the lesser of 1W (30dBm) or  $17\text{ dBm} + 10\log_{10}(26\text{dB BW}) = 17\text{ dBm} + 10\log_{10}(21.26) = 41.28\text{ dBm}$ .***

***In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).***

### Test Procedure Used


ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G  
KDB 789033 D02 v02 – Section E)3)b) Method PM-G  
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique  
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

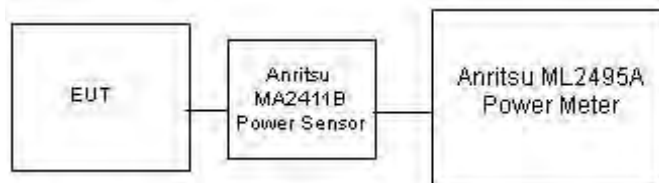

**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 58 of 200	



## Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]				Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode						
				802.11a	802.11n	802.11ac	EIRP			
5180	36	AVG	-7.10	18.26	18.23	17.71	11.16	-5.72	23.01	-11.85
5200	40	AVG	-7.10	18.40	18.26	17.63	11.30	-5.58	23.01	-11.71
5220	44	AVG	-7.10	18.32	18.31	17.60	11.22	-5.66	23.01	-11.79
5240	48	AVG	-7.10	18.30	18.26	17.70	11.20	-5.68	23.01	-11.81
5260	52	AVG	-7.10	18.15	18.15	18.14	11.05	-5.83	30.00	-18.95
5280	56	AVG	-7.10	18.22	18.20	18.20	11.12	-5.76	30.00	-18.88
5300	60	AVG	-7.10	18.28	18.24	18.22	11.18	-5.70	30.00	-18.82
5320	64	AVG	-7.10	18.25	18.17	18.28	11.18	-5.70	30.00	-18.82
5500	100	AVG	-6.28	18.39	18.30	18.34	12.11	-5.59	30.00	-17.89
5580	116	AVG	-6.28	17.92	17.77	17.76	11.64	-6.06	30.00	-18.36
5660	132	AVG	-6.28	17.68	17.54	17.51	11.40	-6.30	30.00	-18.60
5720	144	AVG	-6.28	17.73	17.66	17.87	11.59	-6.11	30.00	-18.41
5745	149	AVG	-6.12	17.44	17.41	17.40	11.32	-12.56	-	-
5785	157	AVG	-6.12	17.42	17.15	17.44	11.32	-12.56	-	-
5825	165	AVG	-6.12	17.43	18.07	17.52	11.95	-11.93	-	-

Table 7-6. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (40MHz) Conducted Power [dBm]			Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode						
				802.11n	802.11ac	EIRP				
5190	38	AVG	-7.10	16.05	16.02	8.95	23.98	-7.93	23.01	-14.06
5230	46	AVG	-7.10	16.97	17.03	9.93	23.98	-6.95	23.01	-13.08
5270	54	AVG	-7.10	16.73	16.77	9.67	23.98	-7.21	30.00	-20.33
5310	62	AVG	-7.10	16.77	16.86	9.76	23.98	-7.12	30.00	-20.24
5510	102	AVG	-6.28	16.90	16.97	10.69	23.98	-7.01	30.00	-19.31
5550	110	AVG	-6.28	17.10	16.91	10.82	23.98	-6.88	30.00	-19.18
5670	134	AVG	-6.28	17.19	16.92	10.91	23.98	-6.79	30.00	-19.09
5710	142	AVG	-6.28	16.57	16.60	10.32	23.98	-7.38	30.00	-19.68
5755	151	AVG	-6.12	16.65	16.69	10.57	30.00	-13.31	-	-
5795	159	AVG	-6.12	16.58	16.51	10.46	30.00	-13.42	-	-

Table 7-7. 40MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (80MHz) Conducted Power [dBm]		Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode					
				802.11ac	EIRP				
5210	42	AVG	-7.10	16.92	9.82	23.98	-7.06	23.01	-26.20
5290	58	AVG	-7.10	16.90	9.80	23.98	-7.08	30.00	-20.20
5530	106	AVG	-6.28	15.94	9.66	23.98	-8.04	30.00	-20.34
5690	138	AVG	-6.28	16.55	10.27	23.98	-7.43	30.00	-19.73
5775	155	AVG	-6.12	16.81	10.69	30.00	-13.19	-	-

Table 7-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 59 of 200	

## Antenna-2 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				802.11a	802.11n	802.11ac	EIRP				
5180	36	AVG	-7.95	17.86	17.81	17.87	9.92	23.98	-6.11	23.01	-13.09
5200	40	AVG	-7.95	17.91	17.80	18.07	10.12	23.98	-5.91	23.01	-12.89
5220	44	AVG	-7.95	17.88	17.78	17.96	10.01	23.98	-6.02	23.01	-13.00
5240	48	AVG	-7.95	17.97	17.81	17.98	10.03	23.98	-6.00	23.01	-12.98
5260	52	AVG	-7.95	18.08	17.96	17.85	10.13	23.98	-5.90	30.00	-19.87
5280	56	AVG	-7.95	18.02	17.85	17.94	10.07	23.98	-5.96	30.00	-19.93
5300	60	AVG	-7.95	18.08	17.91	17.93	10.13	23.98	-5.90	30.00	-19.87
5320	64	AVG	-7.95	18.17	18.03	17.74	10.22	23.98	-5.81	30.00	-19.78
5500	100	AVG	-6.27	18.01	17.91	17.85	11.74	23.98	-5.97	30.00	-18.26
5580	116	AVG	-6.27	18.32	18.17	18.23	12.05	23.98	-5.66	30.00	-17.95
5660	132	AVG	-6.27	18.19	18.01	17.96	11.92	23.98	-5.79	30.00	-18.08
5720	144	AVG	-6.27	18.42	18.41	18.37	12.15	23.98	-5.56	30.00	-17.85
5745	149	AVG	-6.08	17.02	16.68	17.28	11.20	30.00	-12.72	-	-
5785	157	AVG	-6.08	16.77	16.76	17.27	11.19	30.00	-12.73	-	-
5825	165	AVG	-6.08	18.03	17.59	18.16	12.08	30.00	-11.84	-	-

Table 7-9. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (40MHz) Conducted Power [dBm]			Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode						
				802.11n	802.11ac	EIRP				
5190	38	AVG	-7.95	15.93	15.43	7.98	23.98	-8.05	23.01	-15.03
5230	46	AVG	-7.95	16.67	16.68	8.73	23.98	-7.30	23.01	-14.28
5270	54	AVG	-7.95	16.68	16.62	8.73	23.98	-7.30	30.00	-21.27
5310	62	AVG	-7.95	16.82	16.77	8.87	23.98	-7.16	30.00	-21.13
5510	102	AVG	-6.27	16.88	16.79	10.61	23.98	-7.10	30.00	-19.39
5550	110	AVG	-6.27	17.23	17.13	10.96	23.98	-6.75	30.00	-19.04
5670	134	AVG	-6.27	17.31	17.02	11.04	23.98	-6.67	30.00	-18.96
5710	142	AVG	-6.27	17.19	17.19	10.92	23.98	-6.79	30.00	-19.08
5755	151	AVG	-6.08	17.16	17.24	11.16	30.00	-12.76	-	-
5795	159	AVG	-6.08	17.10	17.12	11.04	30.00	-12.88	-	-

Table 7-10. 40MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (80MHz) Conducted Power [dBm]		Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode					
				802.11ac	EIRP				
5210	42	AVG	-7.95	16.58	8.63	23.98	-7.40	23.01	-14.38
5290	58	AVG	-7.95	16.63	8.68	23.98	-7.35	30.00	-21.32
5530	106	AVG	-6.27	15.19	8.92	23.98	-8.79	30.00	-21.08
5690	138	AVG	-6.27	16.60	10.33	23.98	-7.38	30.00	-19.67
5775	155	AVG	-6.08	16.65	10.57	30.00	-13.35	-	-

Table 7-11. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 60 of 200	

## MIMO/CDD Maximum Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	CDD	EIRP				
5180	36	AVG	-4.50	17.05	16.75	19.91	15.41	23.98	-4.07	23.01	-7.60
5200	40	AVG	-4.50	17.13	16.86	20.01	15.51	23.98	-3.97	23.01	-7.50
5220	44	AVG	-4.50	17.16	16.91	20.05	15.55	23.98	-3.93	23.01	-7.46
5240	48	AVG	-4.50	17.15	16.90	20.04	15.54	23.98	-3.94	23.01	-7.47
5260	52	AVG	-4.50	16.88	16.98	19.94	15.44	23.98	-4.04	30.00	-14.56
5280	56	AVG	-4.50	17.11	17.20	20.17	15.67	23.98	-3.81	30.00	-14.33
5300	60	AVG	-4.50	16.94	17.02	19.99	15.49	23.98	-3.99	30.00	-14.51
5320	64	AVG	-4.50	16.19	16.87	19.55	15.05	23.98	-4.42	30.00	-14.95
5500	100	AVG	-3.26	16.99	17.33	20.17	16.91	23.98	-3.81	30.00	-13.09
5580	116	AVG	-3.26	16.98	17.28	20.14	16.88	23.98	-3.84	30.00	-13.12
5660	132	AVG	-3.26	16.94	17.20	20.08	16.82	23.98	-3.90	30.00	-13.18
5720	144	AVG	-3.26	16.73	16.98	19.87	16.61	23.98	-4.11	30.00	-13.39
5745	149	AVG	-3.08	17.44	17.02	20.25	17.17	30.00	-9.75	-	-
5785	157	AVG	-3.08	17.42	16.77	20.12	17.04	30.00	-9.88	-	-
5825	165	AVG	-3.08	17.53	17.21	20.38	17.30	30.00	-9.62	-	-

Table 7-12. CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	MIMO	EIRP				
5180	36	AVG	-4.50	17.10	16.91	20.02	15.52	23.98	-3.96	23.01	-7.49
5200	40	AVG	-4.50	17.19	17.05	20.13	15.63	23.98	-3.85	23.01	-7.38
5220	44	AVG	-4.50	17.22	17.15	20.20	15.70	23.98	-3.78	23.01	-7.31
5240	48	AVG	-4.50	17.30	17.24	20.28	15.78	23.98	-3.70	23.01	-7.23
5260	52	AVG	-4.50	17.09	17.15	20.13	15.63	23.98	-3.85	30.00	-14.37
5280	56	AVG	-4.50	17.16	17.73	20.46	15.96	23.98	-3.51	30.00	-14.04
5300	60	AVG	-4.50	17.00	17.21	20.12	15.62	23.98	-3.86	30.00	-14.38
5320	64	AVG	-4.50	16.83	16.69	19.77	15.27	23.98	-4.21	30.00	-14.73
5500	100	AVG	-3.26	17.14	17.68	20.43	17.17	23.98	-3.55	30.00	-12.83
5580	116	AVG	-3.26	17.15	17.57	20.38	17.12	23.98	-3.60	30.00	-12.88
5660	132	AVG	-3.26	17.05	17.57	20.33	17.07	23.98	-3.65	30.00	-12.93
5720	144	AVG	-3.26	16.96	17.44	20.22	16.96	23.98	-3.76	30.00	-13.04
5745	149	AVG	-3.08	17.04	17.04	20.05	16.97	30.00	-9.95	-	-
5785	157	AVG	-3.08	17.02	16.90	19.97	16.89	30.00	-10.03	-	-
5825	165	AVG	-3.08	16.81	17.02	19.93	16.85	30.00	-10.07	-	-

Table 7-13. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 61 of 200	

Freq [MHz]	Channel	Detector	Directional Gain [dBi]	5GHz (20MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	MIMO	EIRP				
5180	36	AVG	-4.50	17.33	16.97	20.16	15.66	23.98	-3.81	23.01	-7.35
5200	40	AVG	-4.50	17.19	17.17	20.19	15.69	23.98	-3.79	23.01	-7.32
5220	44	AVG	-4.50	17.28	17.18	20.24	15.74	23.98	-3.74	23.01	-7.27
5240	48	AVG	-4.50	17.27	17.27	20.28	15.78	23.98	-3.70	23.01	-7.23
5260	52	AVG	-4.50	17.13	17.26	20.21	15.71	23.98	-3.77	30.00	-14.29
5280	56	AVG	-4.50	17.34	17.40	20.38	15.88	23.98	-3.60	30.00	-14.12
5300	60	AVG	-4.50	17.05	17.24	20.16	15.66	23.98	-3.82	30.00	-14.34
5320	64	AVG	-4.50	16.48	16.57	19.54	15.04	23.98	-4.44	30.00	-14.96
5500	100	AVG	-3.26	17.18	17.67	20.44	17.18	23.98	-3.54	30.00	-12.82
5580	116	AVG	-3.26	17.23	17.66	20.46	17.20	23.98	-3.52	30.00	-12.80
5660	132	AVG	-3.26	17.17	17.64	20.42	17.16	23.98	-3.56	30.00	-12.84
5720	144	AVG	-3.26	16.99	17.34	20.18	16.92	23.98	-3.80	30.00	-13.08
5745	149	AVG	-3.08	17.19	17.13	20.17	17.09	30.00	-9.83	-	-
5785	157	AVG	-3.08	17.07	16.89	19.99	16.91	30.00	-10.01	-	-
5825	165	AVG	-3.08	16.96	16.93	19.96	16.88	30.00	-10.04	-	-

Table 7-14. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (40MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	MIMO	EIRP				
5190	38	AVG	-4.50	15.52	15.39	18.47	13.97	23.98	-5.51	23.01	-9.04
5230	46	AVG	-4.50	16.97	16.67	19.83	15.33	23.98	-4.15	23.01	-7.68
5270	54	AVG	-4.50	16.73	16.68	19.72	15.22	23.98	-4.26	30.00	-14.78
5310	62	AVG	-4.50	14.72	14.46	17.60	13.10	23.98	-6.38	30.00	-16.90
5510	102	AVG	-3.26	15.57	15.54	18.57	15.31	23.98	-5.41	30.00	-14.69
5550	110	AVG	-3.26	17.10	17.23	20.18	16.92	23.98	-3.80	30.00	-13.08
5670	134	AVG	-3.26	17.19	17.31	20.26	17.00	23.98	-3.72	30.00	-13.00
5710	142	AVG	-3.26	16.57	17.19	19.90	16.64	23.98	-4.08	30.00	-13.36
5755	151	AVG	-3.08	16.65	17.16	19.92	16.84	30.00	-10.08	-	-
5795	159	AVG	-3.08	16.58	17.10	19.86	16.78	30.00	-10.14	-	-

Table 7-15. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (40MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	MIMO	EIRP				
5190	38	AVG	-4.50	14.41	14.54	17.49	12.99	23.98	-6.49	23.01	-10.02
5230	46	AVG	-4.50	17.03	16.68	19.87	15.37	23.98	-4.11	23.01	-7.64
5270	54	AVG	-4.50	16.77	16.62	19.71	15.21	23.98	-4.27	30.00	-14.79
5310	62	AVG	-4.50	14.81	14.54	17.69	13.19	23.98	-6.29	30.00	-16.81
5510	102	AVG	-3.26	15.23	15.70	18.48	15.22	23.98	-5.50	30.00	-14.78
5550	110	AVG	-3.26	16.91	17.13	20.03	16.77	23.98	-3.95	30.00	-13.23
5670	134	AVG	-3.26	16.92	17.02	19.98	16.72	23.98	-4.00	30.00	-13.28
5710	142	AVG	-3.26	16.60	17.19	19.92	16.66	23.98	-4.06	30.00	-13.34
5755	151	AVG	-3.08	16.69	17.24	19.98	16.90	30.00	-10.02	-	-
5795	159	AVG	-3.08	16.51	17.12	19.84	16.76	30.00	-10.16	-	-

Table 7-16. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 62 of 200	

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	5GHz (80MHz) Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin [dB]
				IEEE Transmission Mode							
				ANT1	ANT2	MIMO	EIRP				
5210	42	AVG	-4.50	14.59	14.25	17.43	12.93	23.98	-6.55	23.01	-10.08
5290	58	AVG	-4.50	14.56	14.28	17.43	12.93	23.98	-6.55	30.00	-17.07
5530	106	AVG	-3.26	15.00	14.30	17.67	14.41	23.98	-6.30	30.00	-15.59
5690	138	AVG	-3.26	16.55	16.60	19.59	16.33	23.98	-4.39	30.00	-13.67
5775	155	AVG	-3.08	16.81	16.65	19.74	16.66	30.00	-10.26	-	-

**Table 7-17. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power**

**Note:**

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_n$  is the gain of the  $n$ th antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log\left[\frac{(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2}{N_{ANT}}\right] \text{ dBi}$$

**Sample MIMO Calculation:**

At 5180MHz in 802.11n mode, the average conducted output power was measured to be 17.10 dBm for Antenna-1 and 16.91 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(17.10 \text{ dBm} + 16.91 \text{ dBm}) = (51.29 \text{ mW} + 49.09 \text{ mW}) = 100.37 \text{ mW} = 20.02 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

At 5180MHz in 802.11n (20MHz BW) mode, the average MIMO conducted power was calculated to be 20.02 dBm with directional gain of -4.5 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$= 20.02 \text{ dBm} + -4.5 \text{ dBi}$$

$$= 15.52 \text{ dBm}$$

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 63 of 200	

## 7.5 Maximum Power Spectral Density – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz, the maximum permissible power spectral density is 11dBm/MHz. The maximum e.i.r.p. power spectral density is 10 dBm.***

***In the 5.25 – 5.35GHz, and 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

### Test Procedure Used


ANSI C63.10-2013 – Section 12.3.2.2  
 KDB 789033 D02 v02 – Section F  
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique  
 KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times$  (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 64 of 200	

## Antenna-1 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density Limit [dBm/MHz]	Power Density Margin [dB]
Band 1	5180	36	a	6	6.75	11.0	-4.25
	5200	40	a	6	6.12	11.0	-4.88
	5240	48	a	6	6.44	11.0	-4.56
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.61	11.0	-5.39
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	5.72	11.0	-5.28
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.98	11.0	-5.03
	5190	38	n (40MHz)	13.5/15 (MCS0)	2.15	11.0	-8.85
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.06	11.0	-8.95
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-0.91	11.0	-11.91
Band 2A	5260	52	a	6	6.57	11.0	-4.44
	5280	56	a	6	6.58	11.0	-4.42
	5320	64	a	6	6.50	11.0	-4.50
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.06	11.0	-4.95
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.07	11.0	-4.93
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.05	11.0	-4.95
	5270	54	n (40MHz)	13.5/15 (MCS0)	1.90	11.0	-9.10
	5310	62	n (40MHz)	13.5/15 (MCS0)	1.99	11.0	-9.02
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-0.99	11.0	-11.99
Band 2C	5500	100	a	6	6.37	11.0	-4.63
	5580	116	a	6	-6.12	11.0	-17.12
	5720	144	a	6	5.90	11.0	-5.11
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.03	11.0	-4.97
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-6.48	11.0	-17.48
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	5.58	11.0	-5.42
	5510	102	n (40MHz)	13.5/15 (MCS0)	-9.18	11.0	-20.18
	5550	110	n (40MHz)	13.5/15 (MCS0)	-9.10	11.0	-20.10
	5710	142	n (40MHz)	13.5/15 (MCS0)	1.79	11.0	-9.21
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-0.47	11.0	-11.47
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-3.92	11.0	-14.92


Table 7-18. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	Max e.i.r.p Power Density Limit [dBm/MHz]	e.i.r.p Power Density Margin [dB]
Band 1	5180	36	a	6	6.75	-7.10	-0.35	10.0	-10.35
	5200	40	a	6	6.12	-7.10	-0.98	10.0	-10.98
	5240	48	a	6	6.44	-7.10	-0.66	10.0	-10.66
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.61	-7.10	-1.49	10.0	-11.49
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	5.72	-7.10	-1.38	10.0	-11.38
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.98	-7.10	-1.13	10.0	-11.13
	5190	38	n (40MHz)	13.5/15 (MCS0)	2.15	-7.10	-4.95	10.0	-14.95
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.06	-7.10	-5.05	10.0	-15.05
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-0.91	-7.10	-8.01	10.0	-18.01


Table 7-19. Band 1 e.i.r.p. Power Spectral Density Measurements

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset	Page 65 of 200	



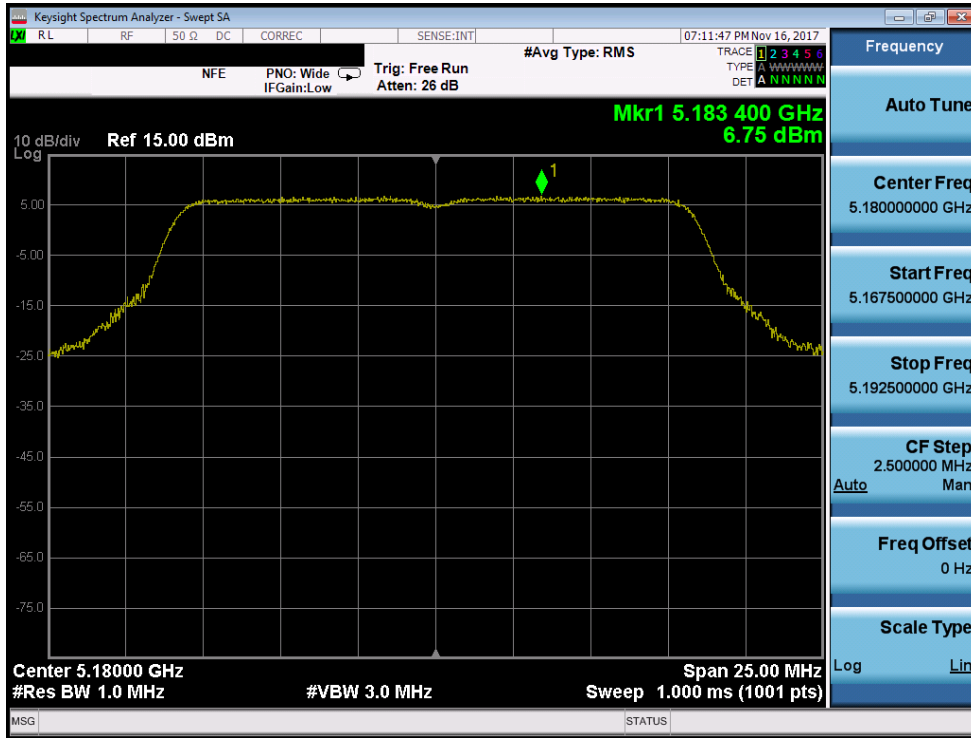


Plot 7-77. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

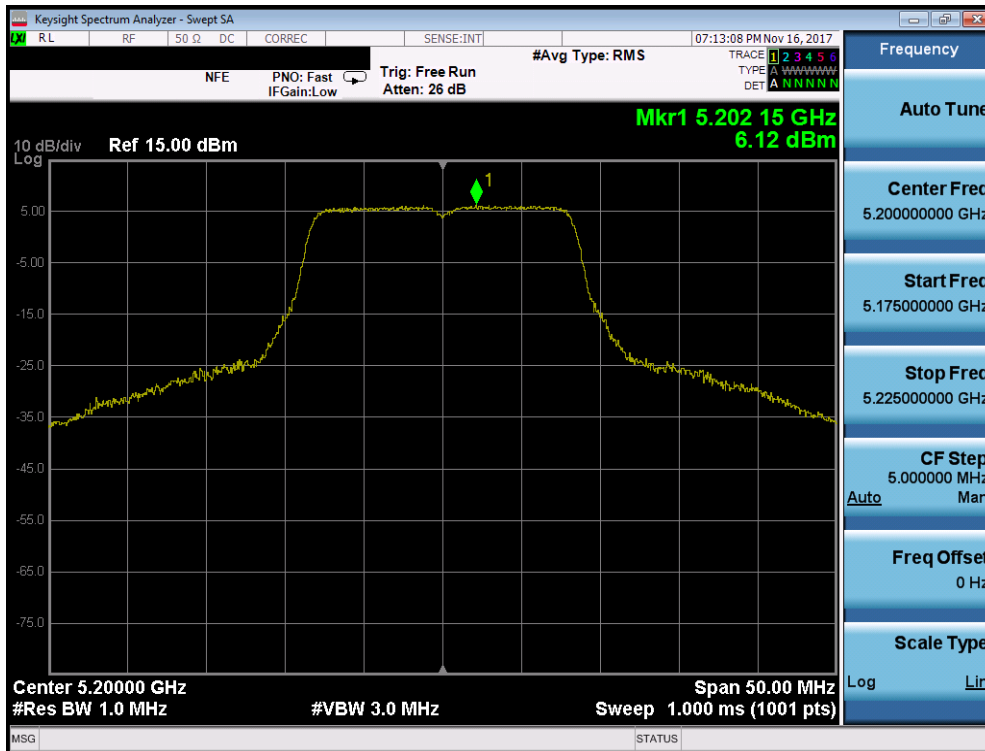


Plot 7-78. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 66 of 200

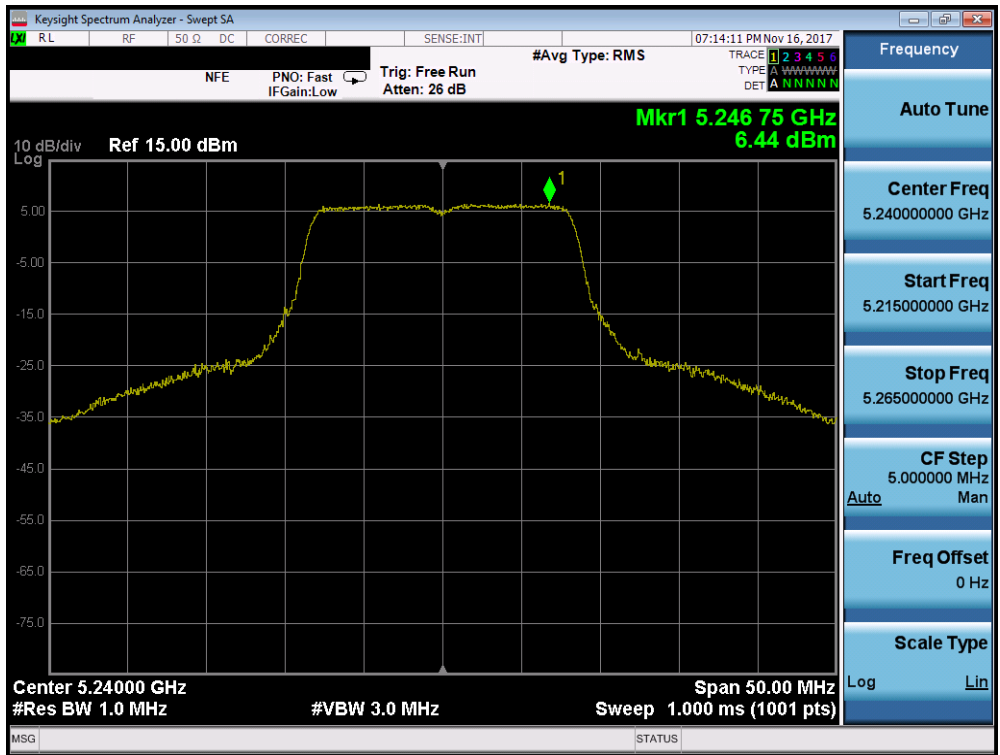


Plot 7-79. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

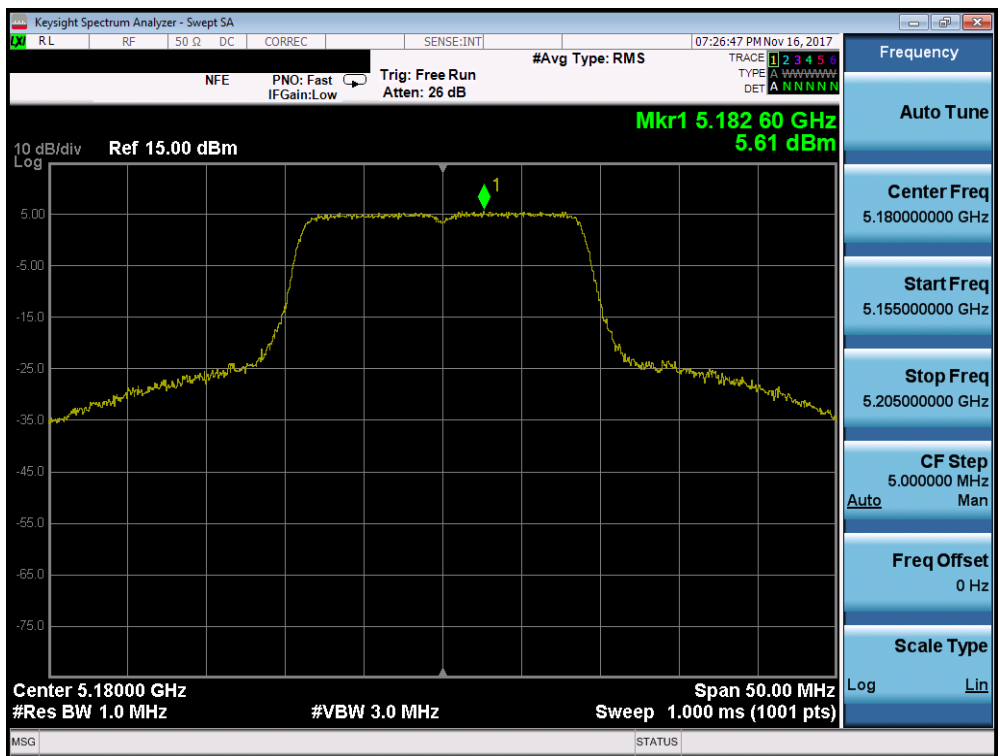


Plot 7-80. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 67 of 200

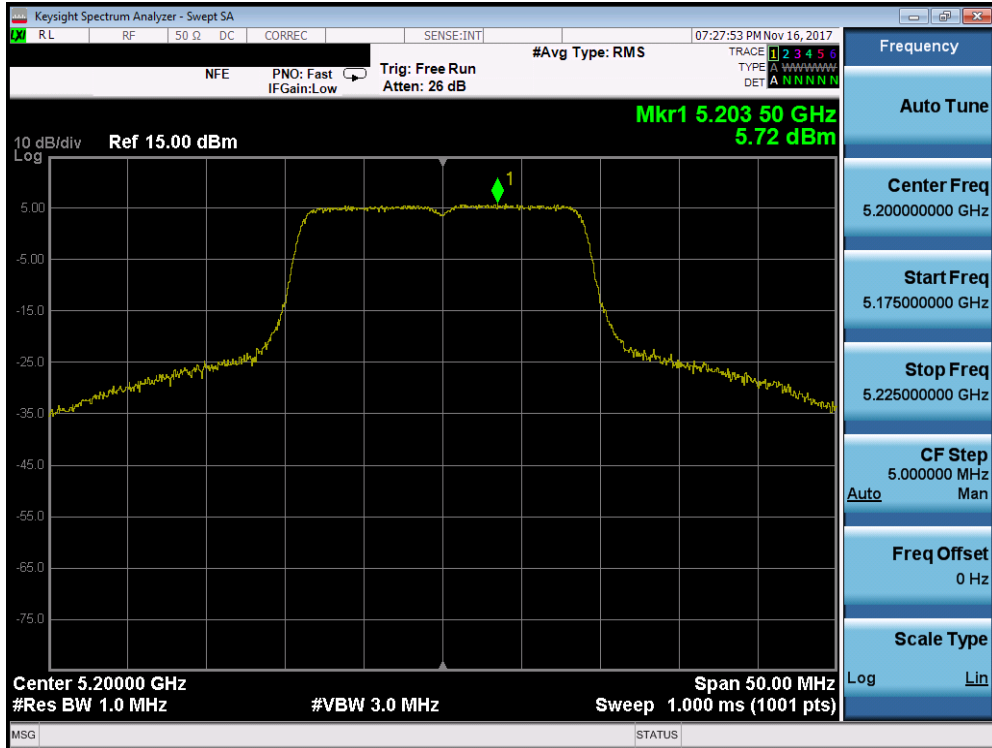

Plot 7-81. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

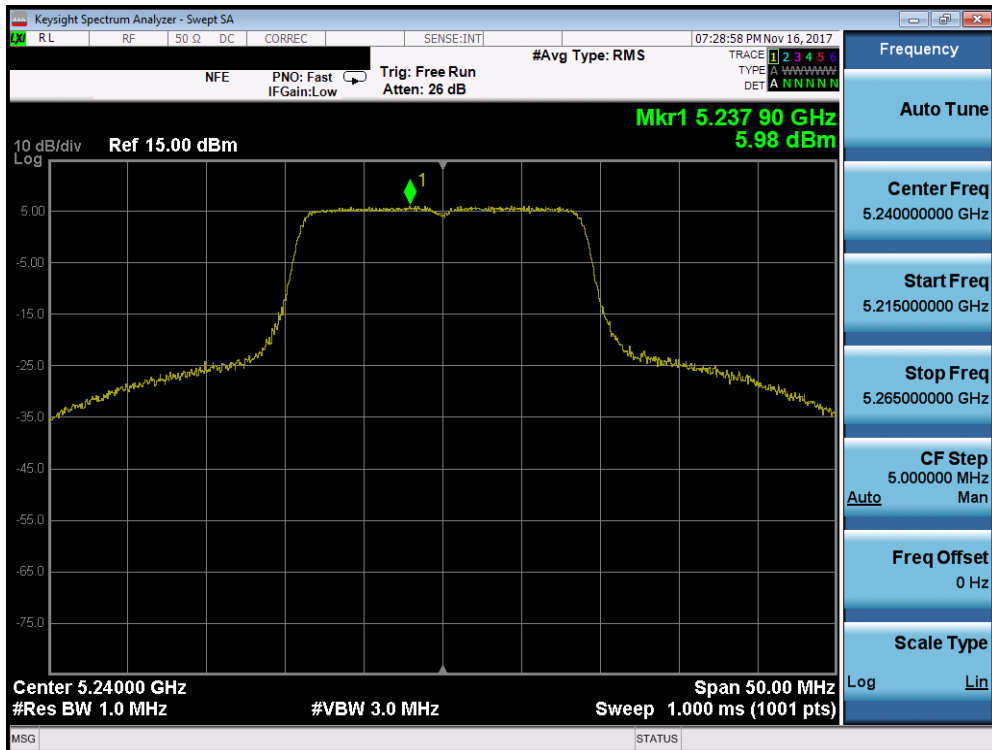


Plot 7-82. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)


FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 68 of 200





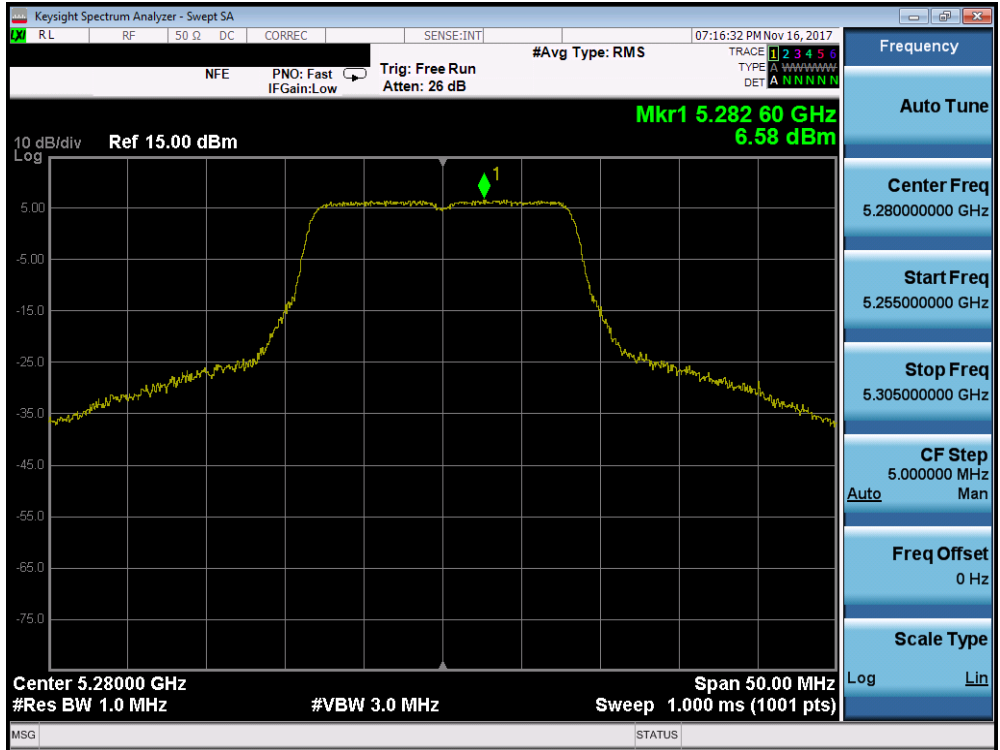


Plot 7-87. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

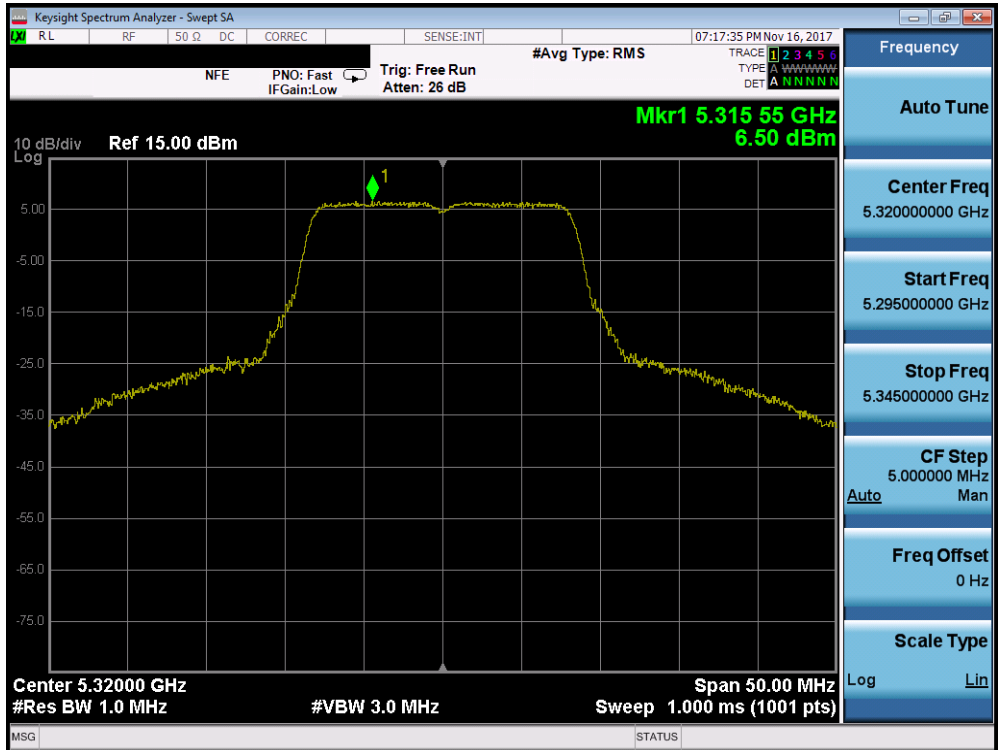


Plot 7-88. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 71 of 200

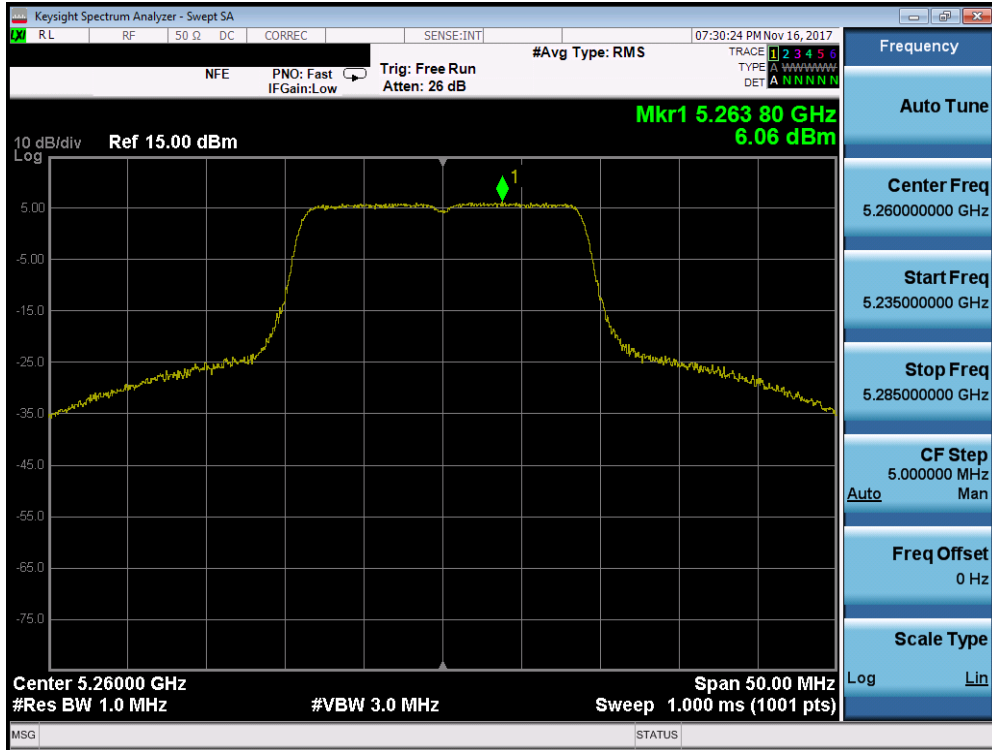


Plot 7-89. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

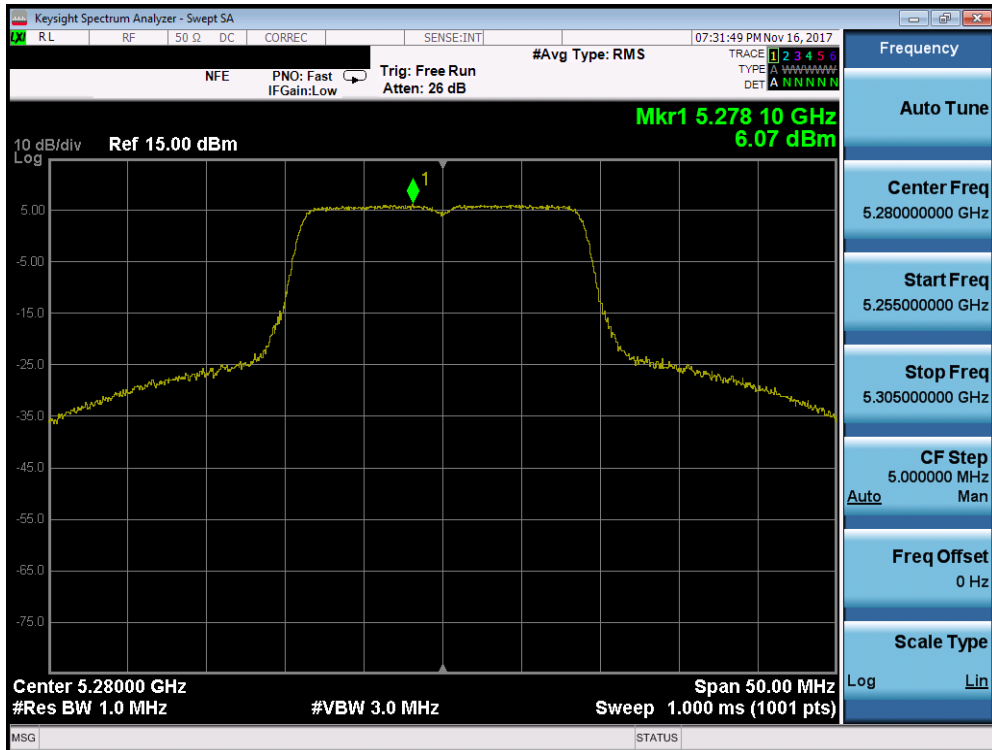


Plot 7-90. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 72 of 200



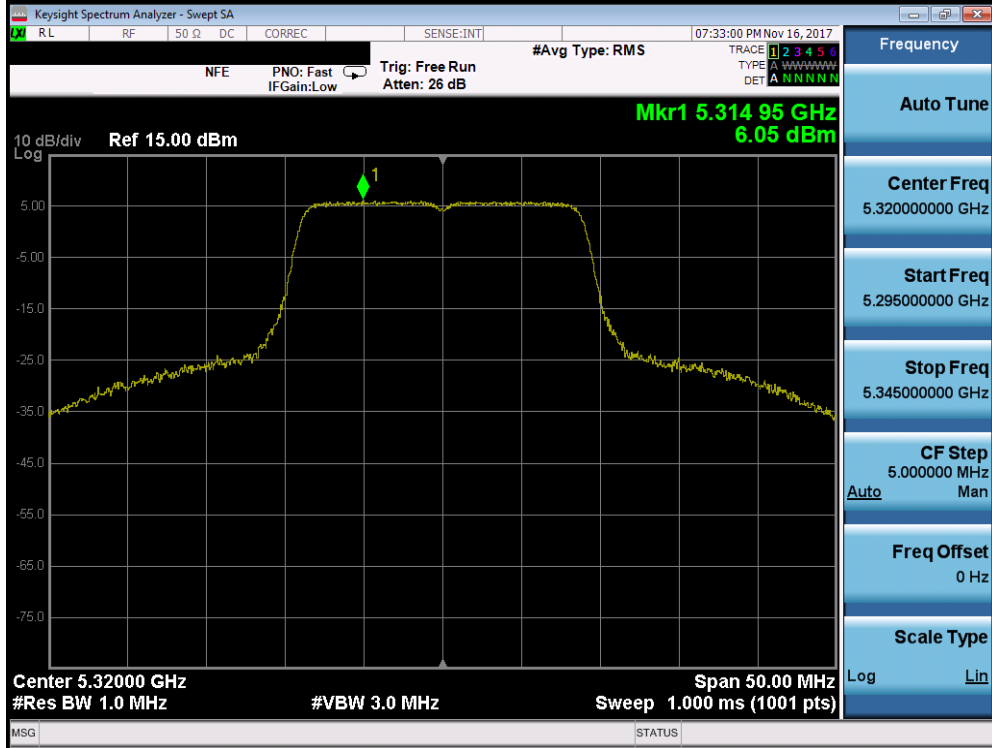


Plot 7-91. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

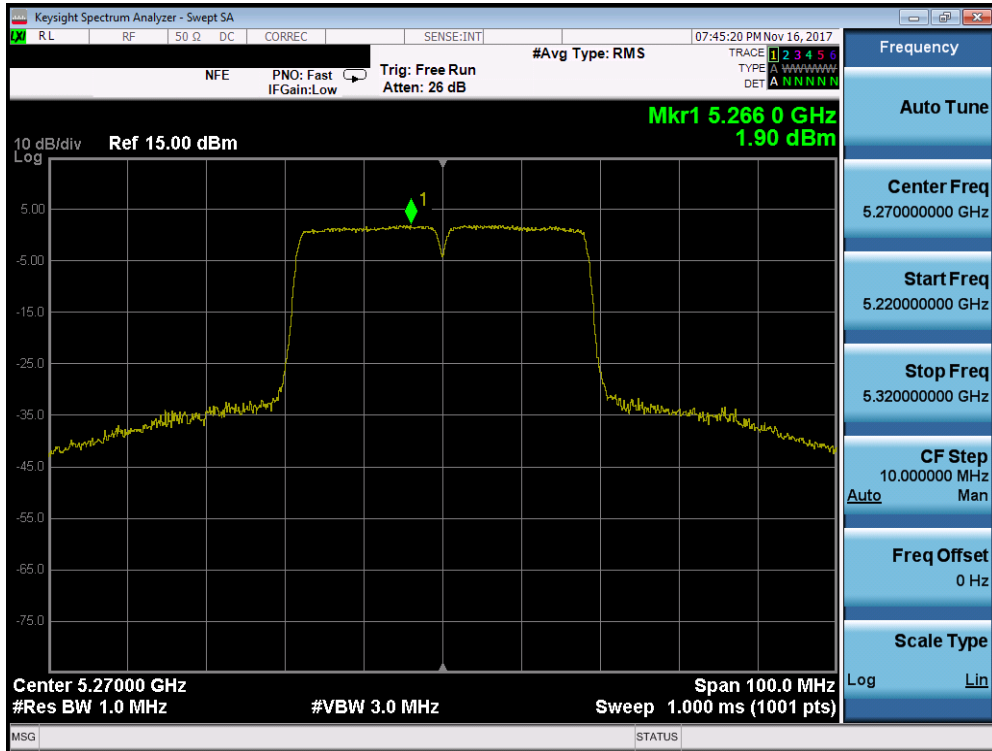


Plot 7-92. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 73 of 200



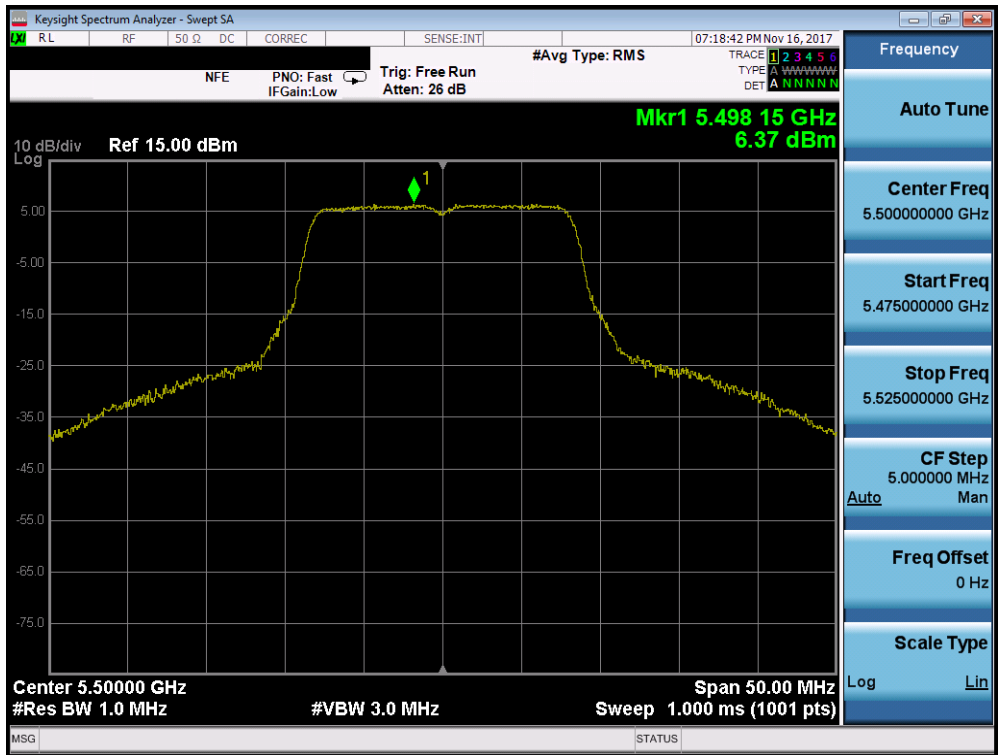


Plot 7-95. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

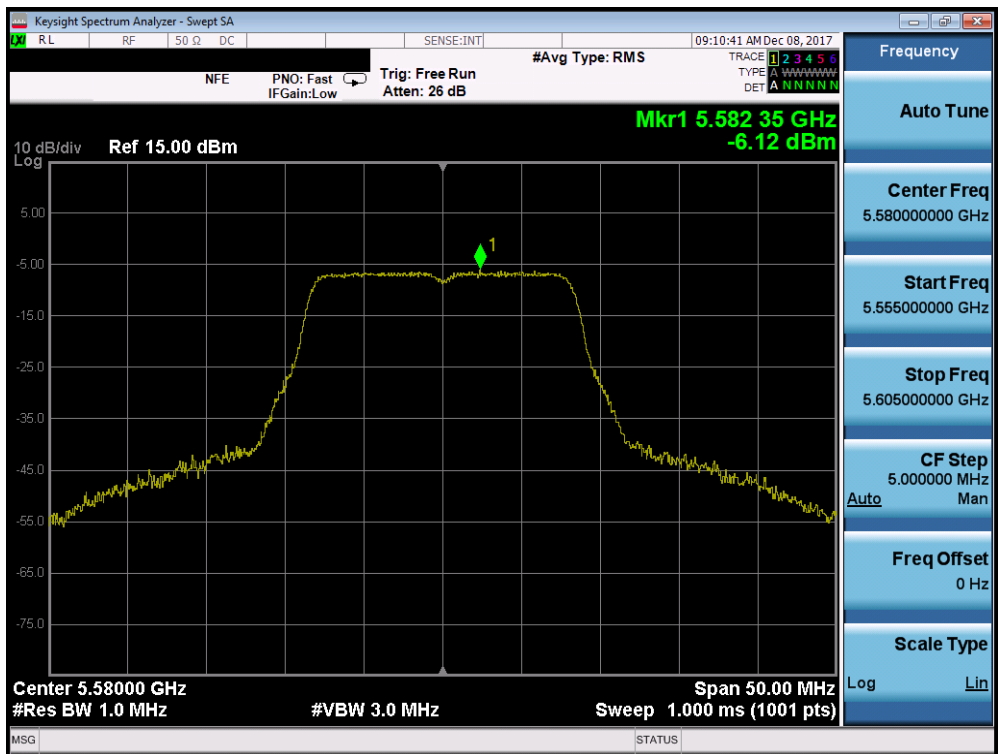


Plot 7-96. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 75 of 200

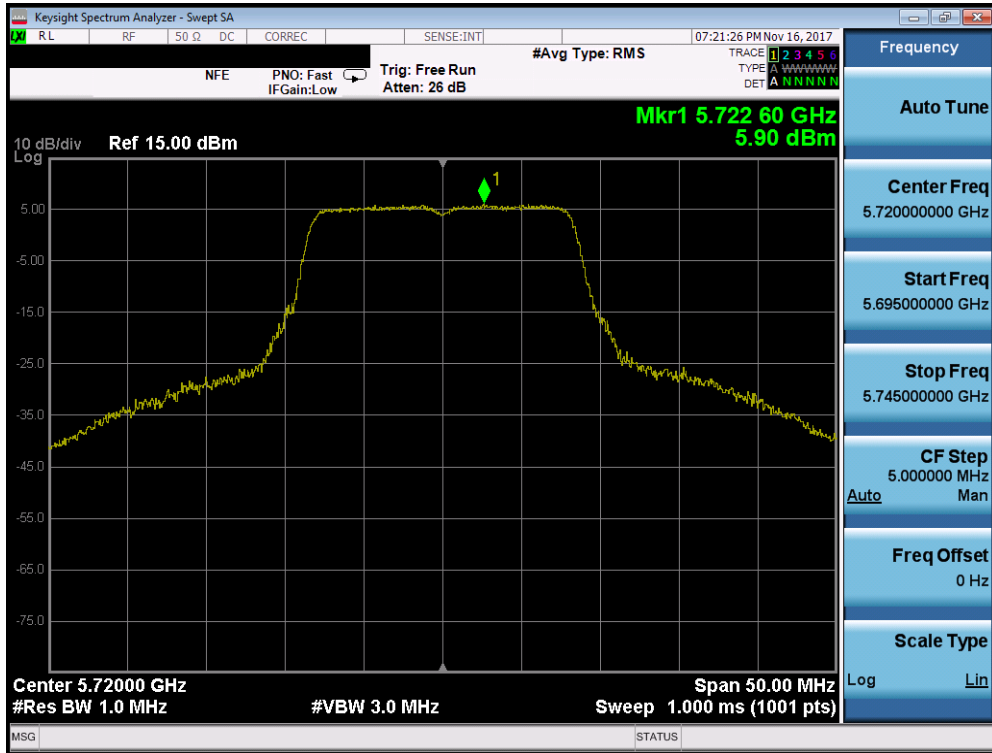


Plot 7-97. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

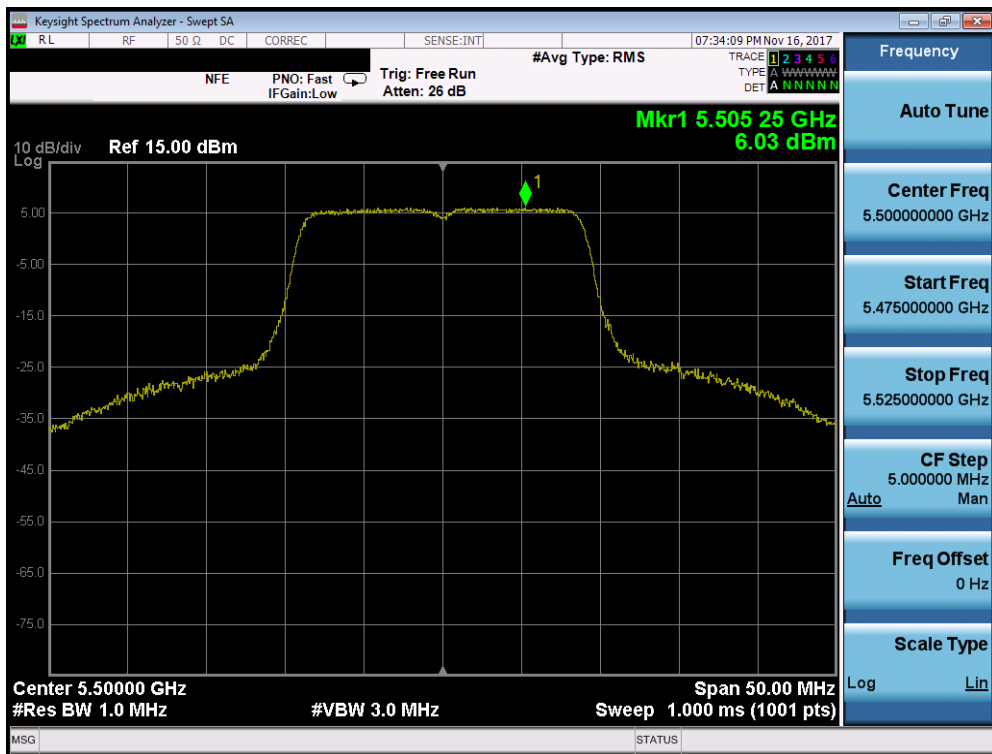


Plot 7-98. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 76 of 200

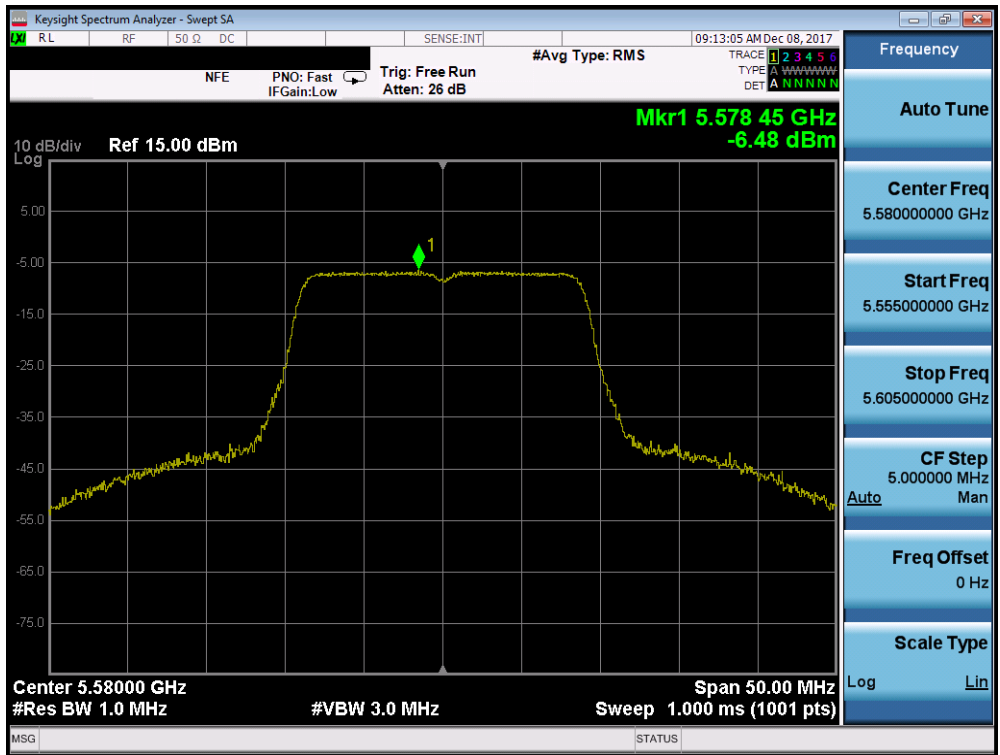

Plot 7-99. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

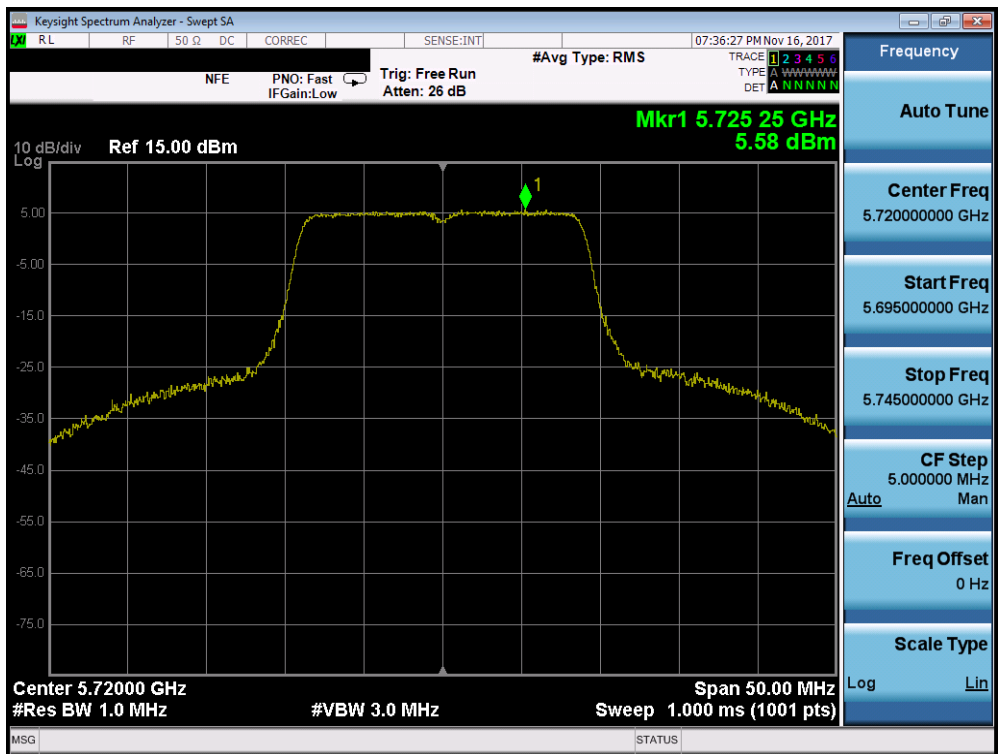


Plot 7-100. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 77 of 200




Plot 7-101. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

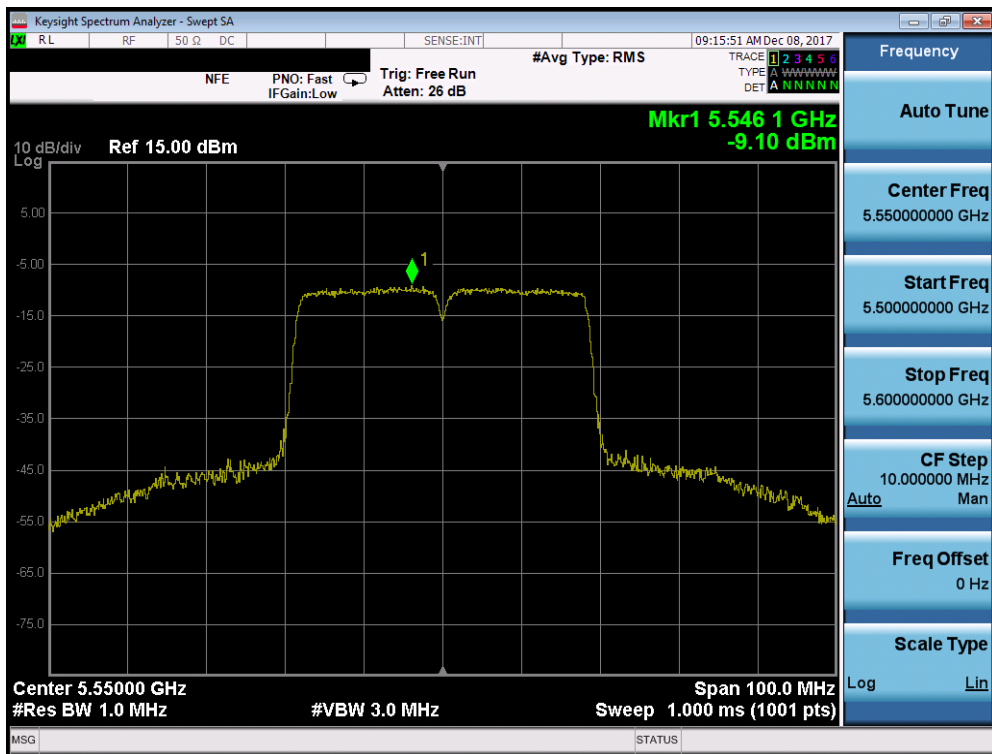


Plot 7-102. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 78 of 200

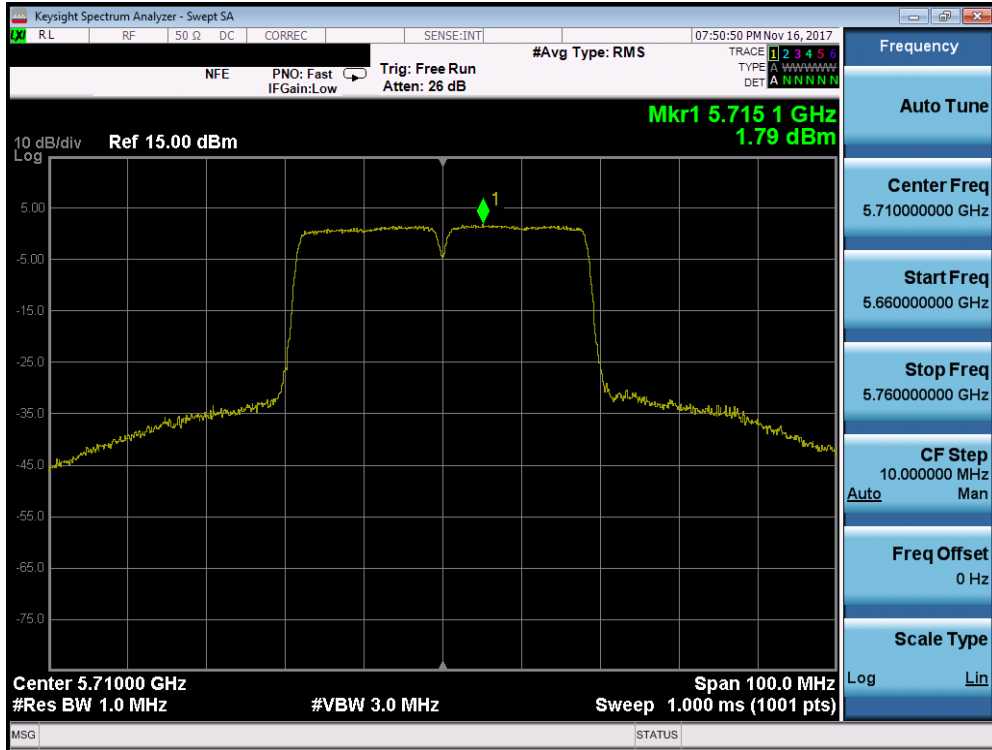


Plot 7-103. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

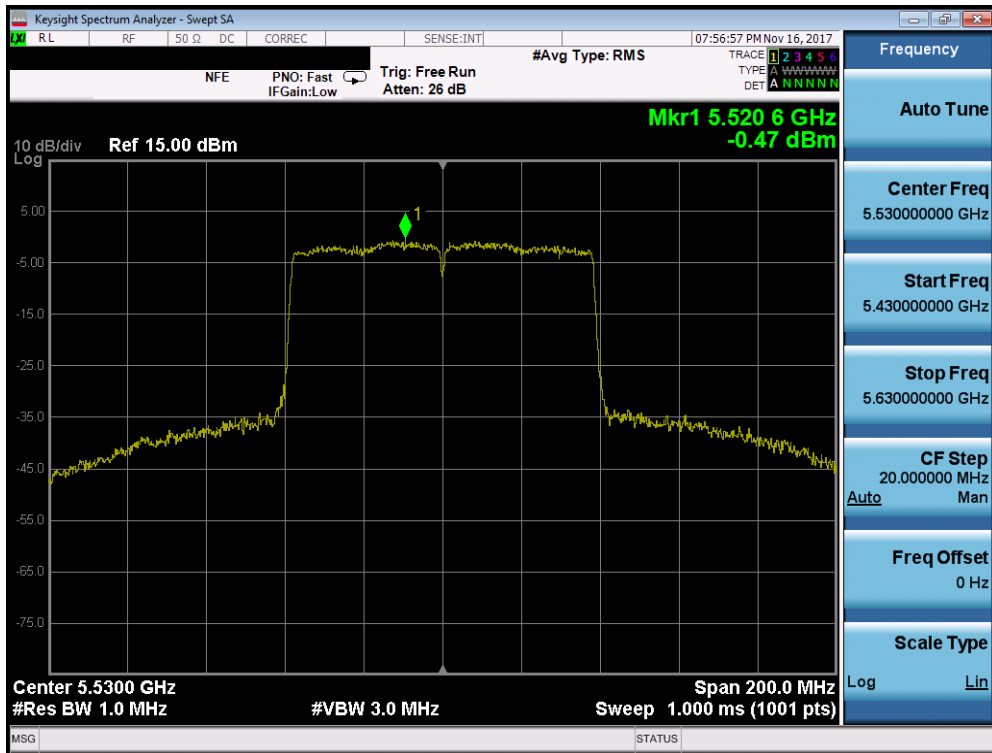

Plot 7-104. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 79 of 200



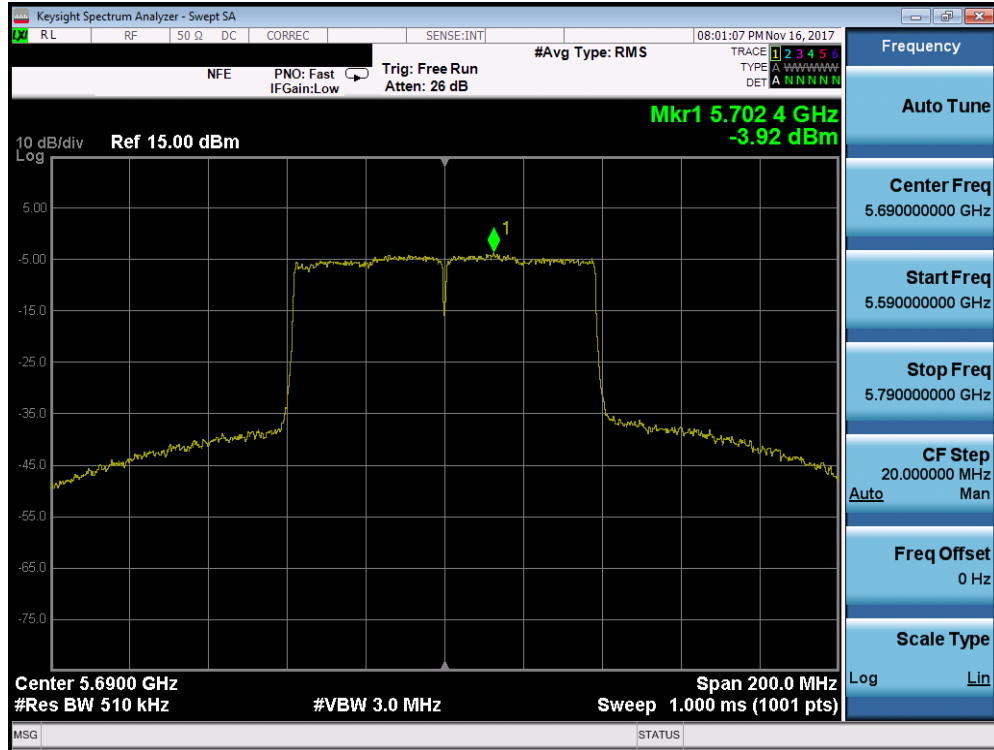


Plot 7-105. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2.A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 80 of 200


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
<b>Band 3</b>	5745	149	a	6	3.37	30.0	-26.63
	5785	157	a	6	3.69	30.0	-26.31
	5825	165	a	6	2.95	30.0	-27.05
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.11	30.0	-26.89
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.15	30.0	-26.85
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	2.87	30.0	-27.13
	5755	151	n (40MHz)	13.5/15 (MCS0)	-0.57	30.0	-30.57
	5795	159	n (40MHz)	13.5/15 (MCS0)	-0.89	30.0	-30.89
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-0.74	30.0	-30.74

**Table 7-20. Band 3 Conducted Power Spectral Density Measurements**

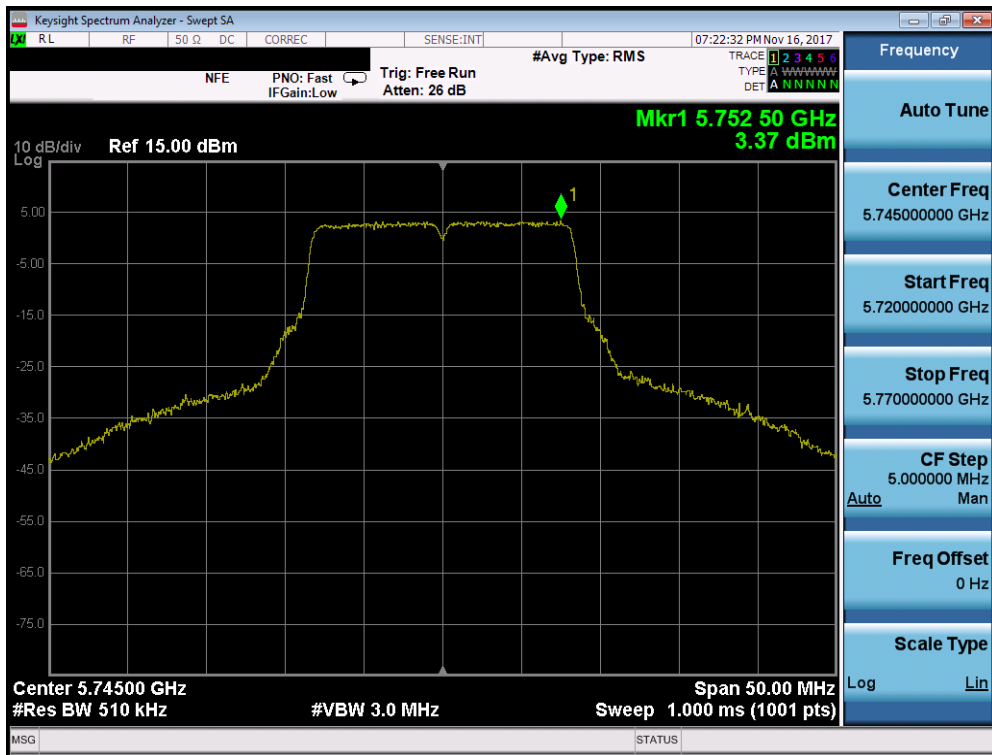


**Plot 7-106. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)**

FCC ID: A3LSMG960U IC: 649E-SMG960U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 81 of 200

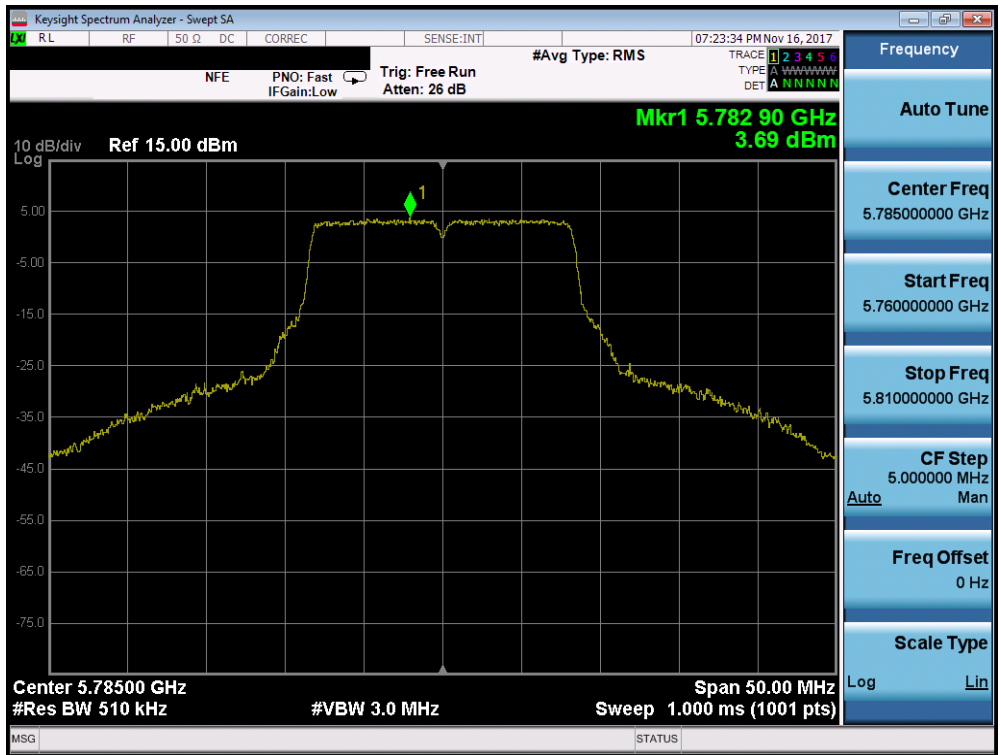


Plot 7-107. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

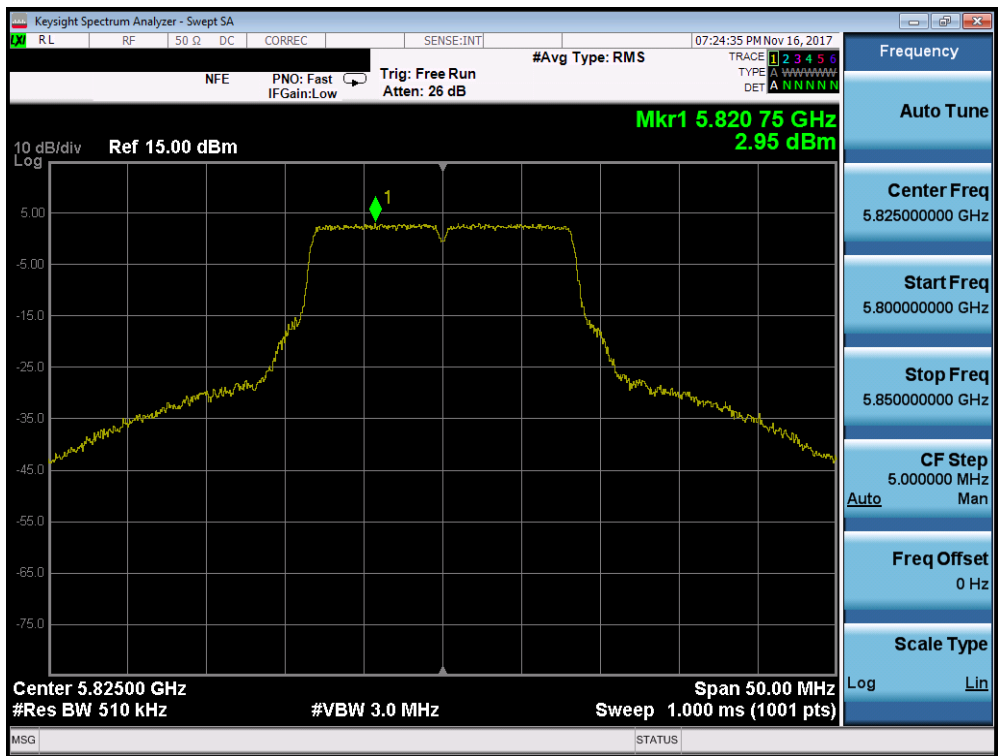


Plot 7-108. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 82 of 200

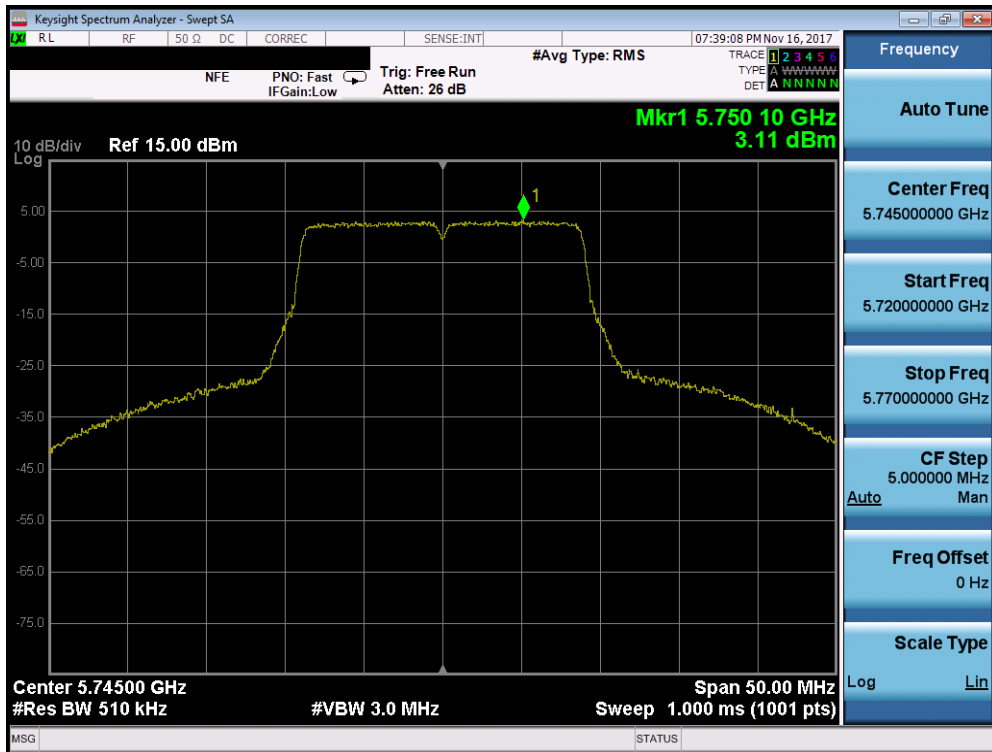

Plot 7-109. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

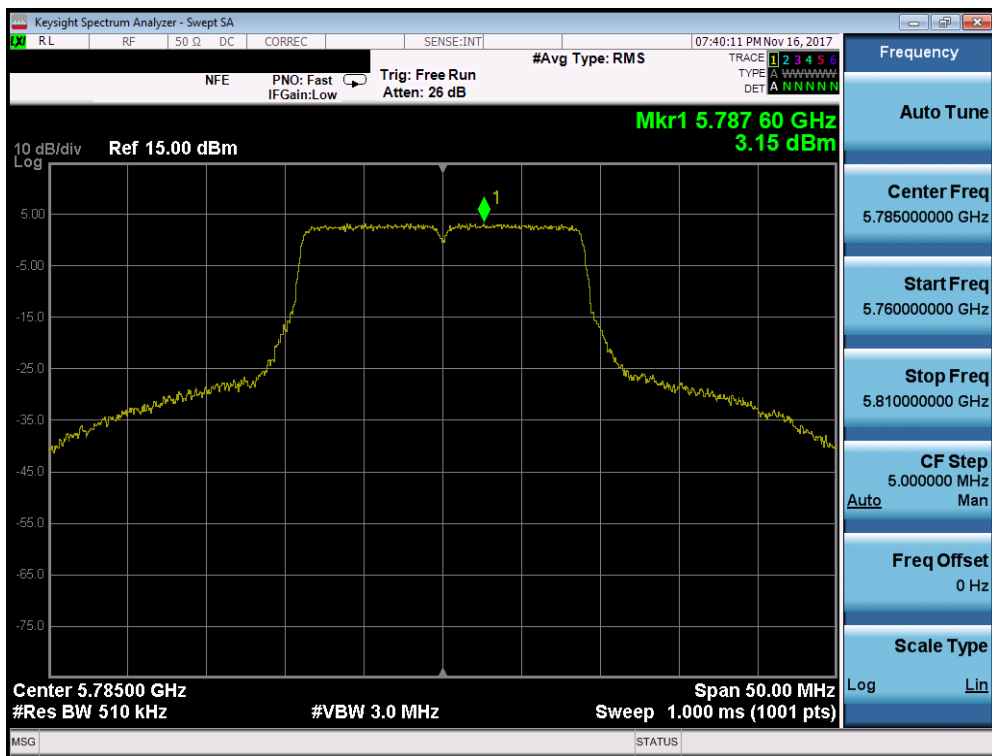

Plot 7-110. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMG960U IC: 649E-SMG960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711010281-06-R2-A3L	Test Dates: 11/1-12/7/2017	EUT Type: Portable Handset		Page 83 of 200



