



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctest.com



## MEASUREMENT REPORT FCC Part 22 & 90

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
11/6-12/14/2017  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M1711060289-04-R2.A3L

<b>FCC ID:</b>	<b>A3LSMG965U</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

<b>Application Type:</b>	Certification
<b>Model:</b>	SM-G965U
<b>Additional Model(s):</b>	SM-G965U1, SM-G965W, SM-G965XU
<b>EUT Type:</b>	Portable Handset
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part:</b>	§2.1049, §22(H), §90(R), §90(S)
<b>Test Procedure(s):</b>	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1711060289-04-R2.A3L) supersedes and replaces the previously issued test report (S/N: 1M1711060289-04-R1.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President




<b>FCC ID:</b> A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset		Page 1 of 62

## TABLE OF CONTENTS


1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location .....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	10
7.1	Summary .....	10
7.2	Occupied Bandwidth .....	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	24
7.4	Band Edge Emissions at Antenna Terminal .....	34
7.5	Conducted Power Output Data .....	44
7.6	Radiated Power (ERP) .....	46
7.7	Radiated Spurious Emissions Measurements .....	49
7.8	Frequency Stability / Temperature Variation .....	55
8.0	CONCLUSION .....	62

<b>FCC ID:</b> A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset	Page 2 of 62	



## MEASUREMENT REPORT

### FCC Part 22(H) & 90



Mode	Tx Frequency (MHz)	Measurement	Max. Power (W)	Max. Power (dBm)	Emission Designator	Modulation
CDMA800 (BC10)	817.9 - 823.1	Conducted	0.318	25.02	1M27F9W	CDMA
LTE Band 14	790.5 - 795.5	ERP	0.071	18.50	4M51G7D	QPSK
LTE Band 14	790.5 - 795.5	ERP	0.060	17.76	4M52W7D	16-QAM
LTE Band 14	790.5 - 795.5	ERP	0.049	16.88	4M52W7D	64-QAM
LTE Band 14	793	ERP	0.064	18.06	9M03G7D	QPSK
LTE Band 14	793	ERP	0.056	17.47	9M00W7D	16-QAM
LTE Band 14	793	ERP	0.041	16.09	9M00W7D	64-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.261	24.16	1M08G7D	QPSK
LTE Band 26	814.7 - 823.3	Conducted	0.225	23.53	1M08W7D	16-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.175	22.42	1M08W7D	64-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.267	24.27	2M69G7D	QPSK
LTE Band 26	815.5 - 822.5	Conducted	0.232	23.65	2M69W7D	16-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.180	22.55	2M69W7D	64-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.264	24.22	4M49G7D	QPSK
LTE Band 26	816.5 - 821.5	Conducted	0.227	23.56	4M50W7D	16-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.177	22.49	4M50W7D	64-QAM
LTE Band 26	819	Conducted	0.267	24.26	8M98G7D	QPSK
LTE Band 26	819	Conducted	0.222	23.46	8M96W7D	16-QAM
LTE Band 26	819	Conducted	0.178	22.51	8M96W7D	64-QAM
LTE Band 26	821.5	ERP	0.083	19.21	13M5G7D	QPSK
LTE Band 26	821.5	ERP	0.054	17.29	13M4W7D	16-QAM
LTE Band 26	821.5	ERP	0.040	16.06	13M4W7D	64-QAM

#### EUT Overview

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 3 of 62	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset	Page 4 of 62	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG965U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22(H) and 90.691.

**Test Device Serial No.:** 2E94E, 2F89A

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) FCC ID: A3LEPN5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset	Page 5 of 62

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03) were used in the measurement of the EUT.

### 3.2 Radiated Power and Radiated Spurious Emissions §2.1053, §90.635, §90.691

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$  specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

FCC ID: A3LSMG965U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 6 of 62	

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset	Page 7 of 62	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	8/10/2017	Annual	8/10/2018	LTx2
Agilent	N9020A	MXA Signal Analyzer	12/28/2016	Annual	12/28/2017	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/27/2017	Annual	3/27/2018	MY52350166
COM-Power	AL-130R	Active Loop Antenna	6/5/2017	Annual	6/5/2018	121085
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Espec	ESX-2CA	Environmental Chamber	4/11/2017	Annual	4/11/2018	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	5/19/2017	Annual	5/19/2018	251425001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/24/2017	Annual	3/24/2018	11401010036
Mini Circuits	TVA-11-422	RF Power Amp		N/A		QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator		N/A		11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2017	Annual	10/13/2018	102060
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102135
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	10/30/2017	Annual	10/30/2018	101058
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	3/30/2016	Biennial	3/30/2018	9105-2404
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

**Table 5-1. Test Equipment**

**Notes:**

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 8 of 62	



## 6.0 SAMPLE CALCULATIONS

### Emission Designator

**Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission – BC10

**Example: Channel 476 CDMA BC10 Mode 3<sup>rd</sup> Harmonic (2453.70MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

#### 16QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

**Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 9 of 62	

# 7.0 TEST RESULTS

## 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMG965U  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): CDMA / EvDO / LTE  
 Band: CDMA/EvDO BC10 / LTE Band 14 / LTE Band 26

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.543 90.691	Conducted Band Edge / Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions except > 50 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046	Conducted Power	N/A		PASS	Section 7.5
90.542	Effective Radiated Power (Band 14)	< 3 Watts max. ERP	RADIATED	PASS	Section 7.6
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP		PASS	Section 7.6
2.1053 90.543 90.691	Radiated Spurious Emissions (CDMA/EvDO BC10, LTE B14, LTE B26)	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions except > 50 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.10.

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 10 of 62	

## 7.2 Occupied Bandwidth

### §2.1049

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


KDB 971168 D01 v03 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

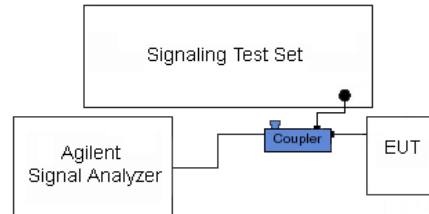


**Figure 7-1. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 11 of 62	

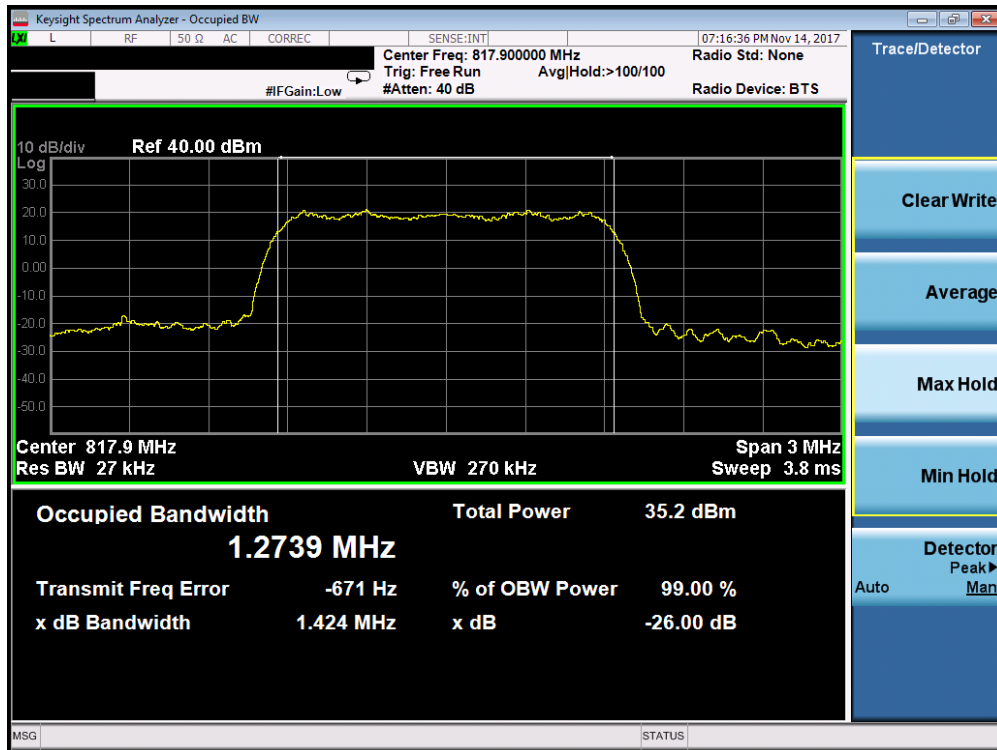


Plot 7-1. Occupied Bandwidth Plot (CDMA/EvDO, Ch. 476)

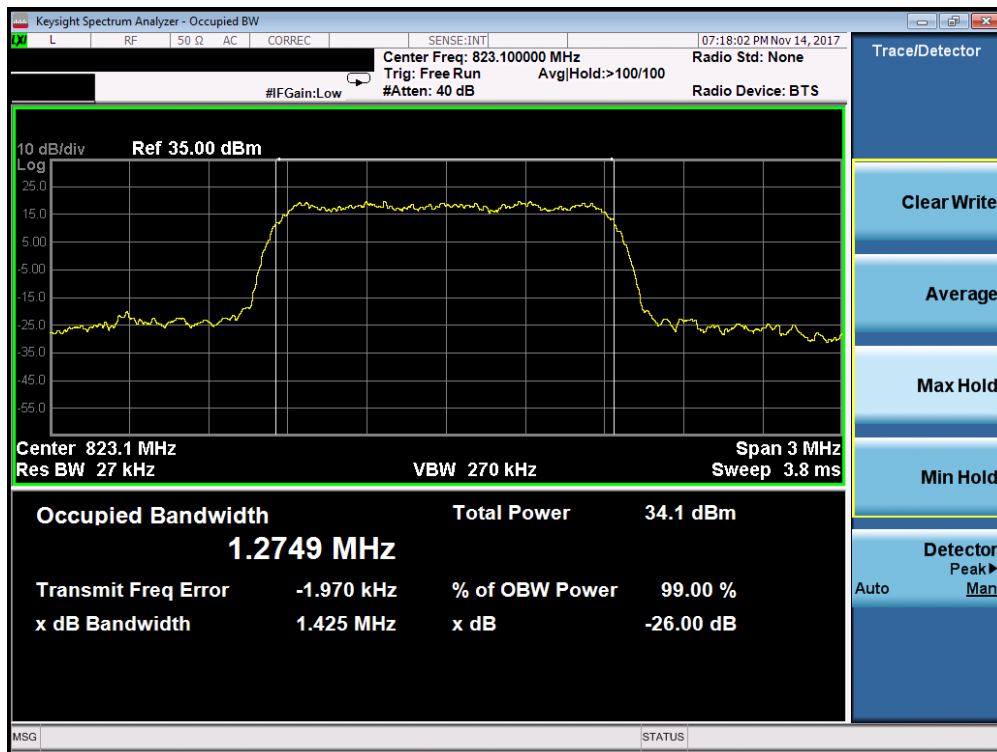


Plot 7-2. Occupied Bandwidth Plot (CDMA/EvDO, Ch. 684)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 12 of 62

**Band 14**

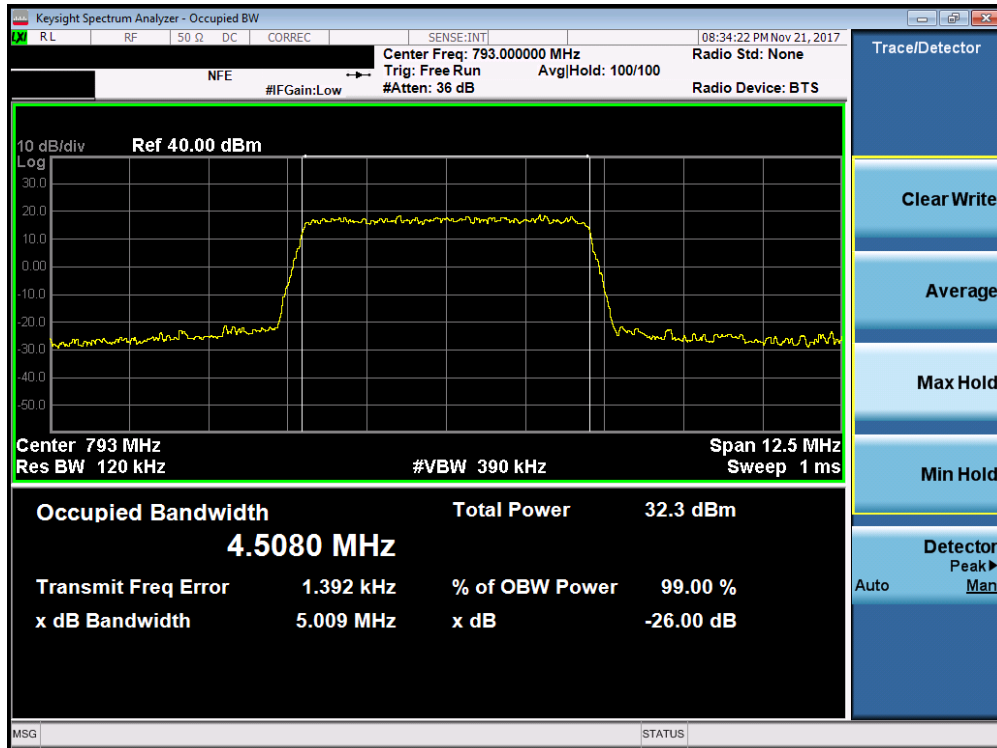


**Plot 7-3. Occupied Bandwidth Plot (Band 14 - 5.0MHz QPSK - Full RB Configuration)**

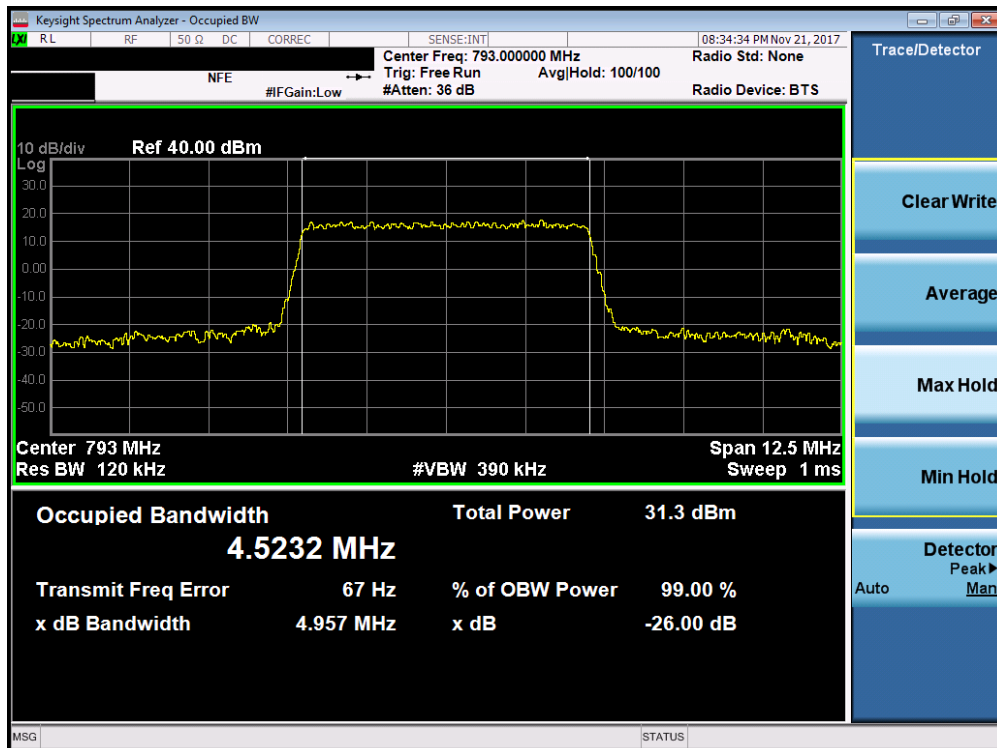


**Plot 7-4. Occupied Bandwidth Plot (Band 14 - 5.0MHz 16-QAM - Full RB Configuration)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 13 of 62

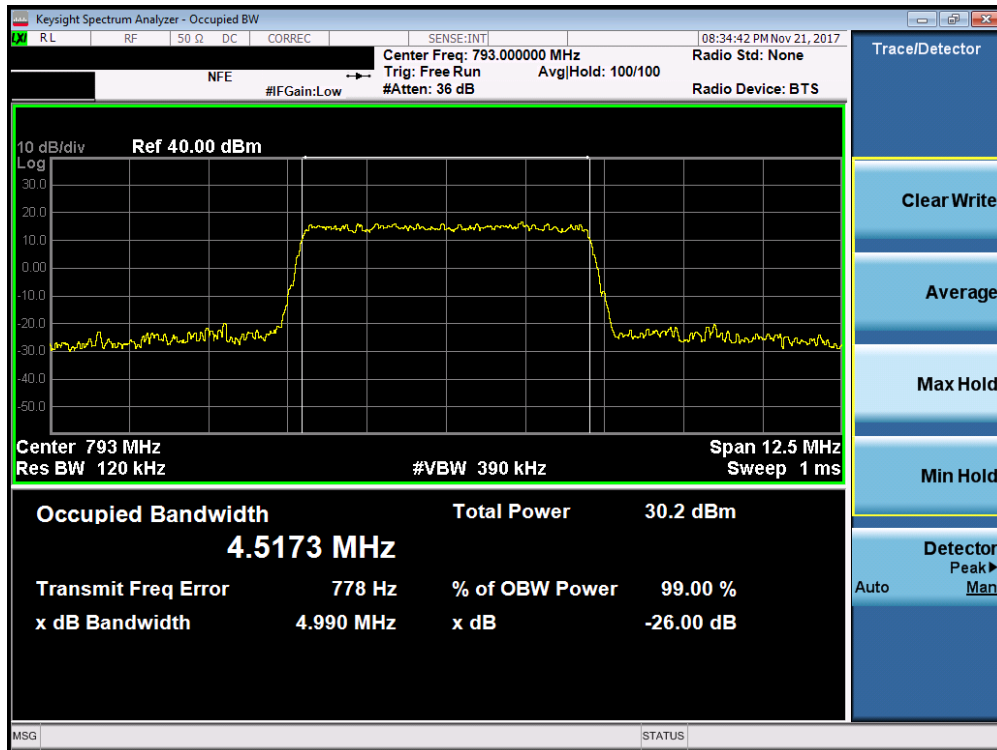


Plot 7-5. Occupied Bandwidth Plot (Band 14 - 5.0MHz 64-QAM - Full RB Configuration)

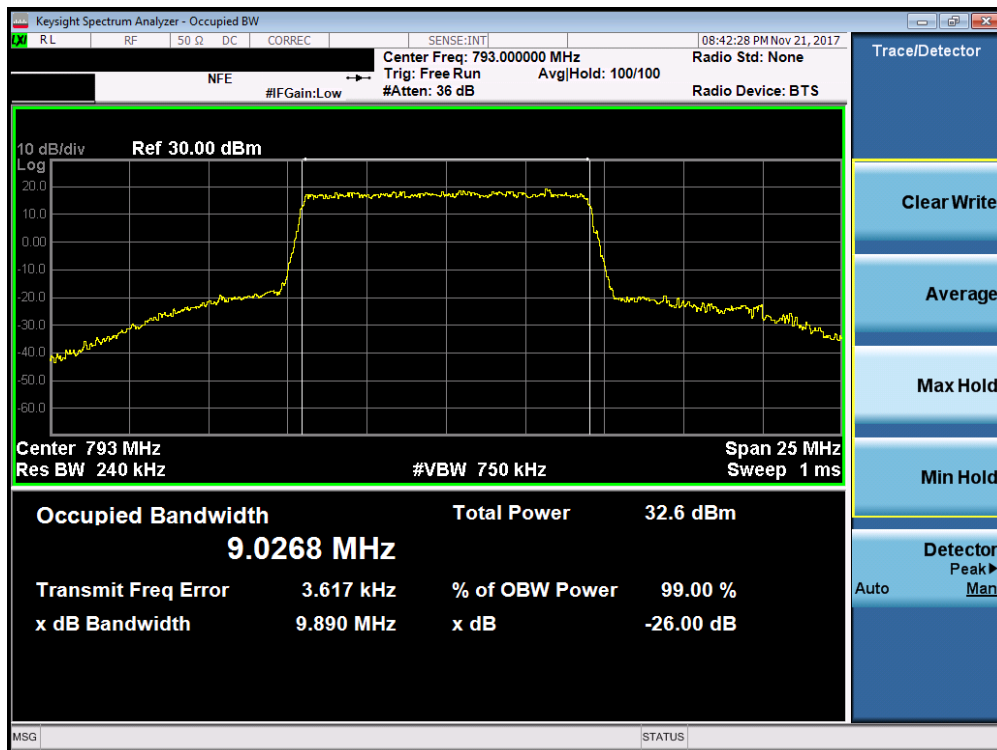


Plot 7-6. Occupied Bandwidth Plot (Band 14 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 14 of 62

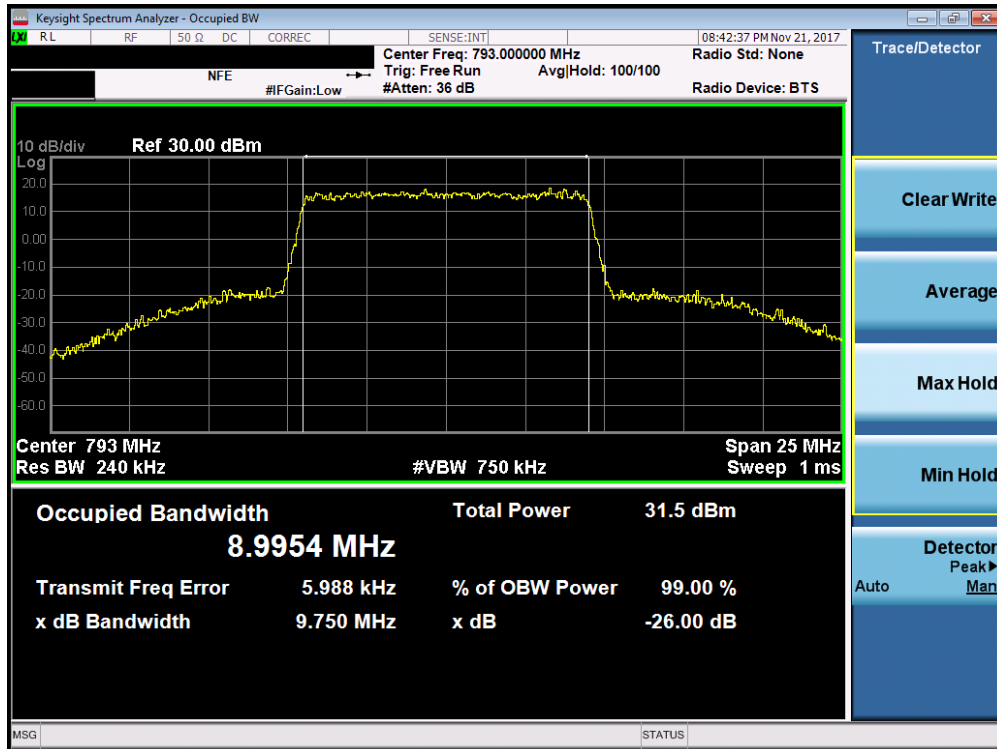


Plot 7-7. Occupied Bandwidth Plot (Band 14 - 10.0MHz 16-QAM - Full RB Configuration)

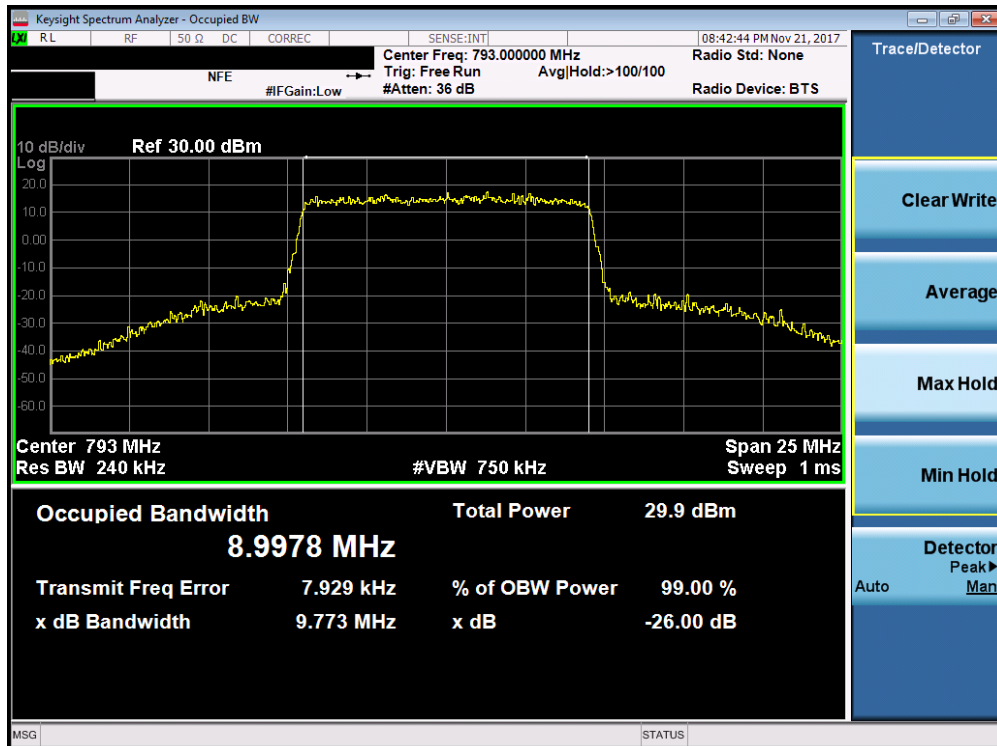


Plot 7-8. Occupied Bandwidth Plot (Band 14 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 15 of 62

**Band 26**

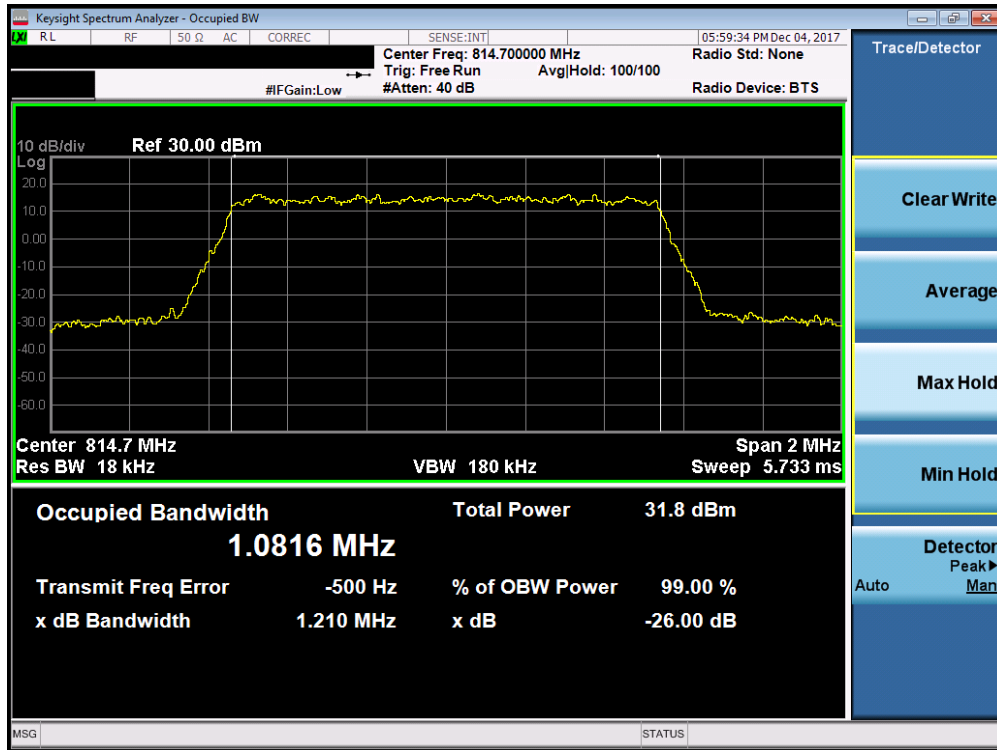


**Plot 7-9. Occupied Bandwidth Plot (Band 26 - 1.4MHz QPSK – RB Size 6– Low Channel)**

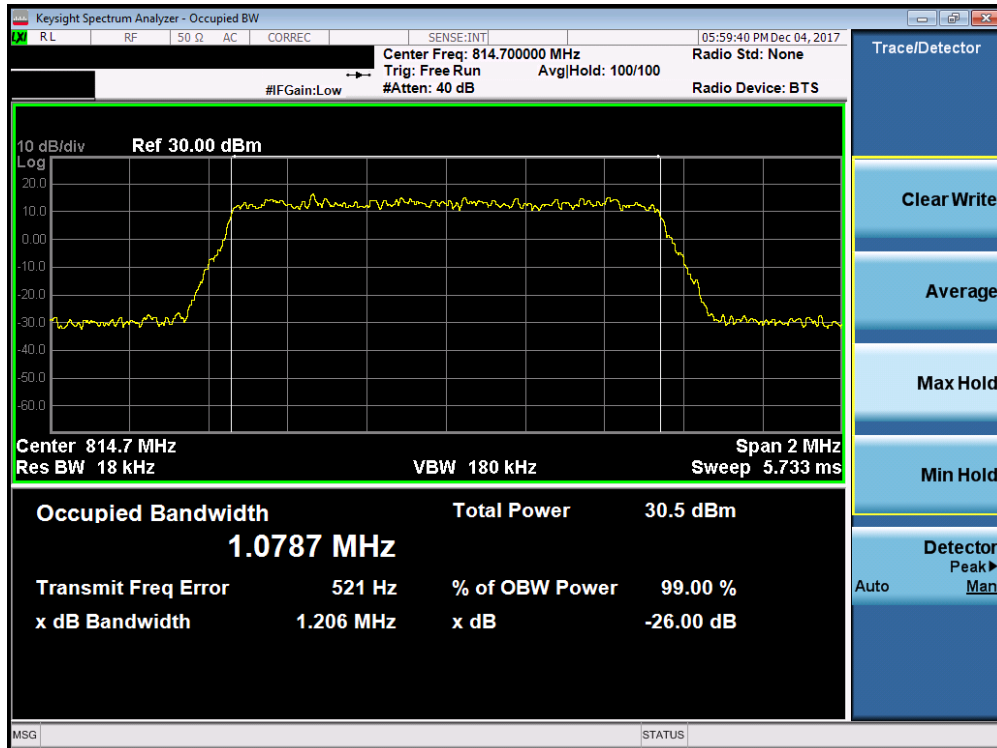


**Plot 7-10. Occupied Bandwidth Plot (Band 26 - 1.4MHz 16-QAM – RB Size 6– Low Channel)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 16 of 62



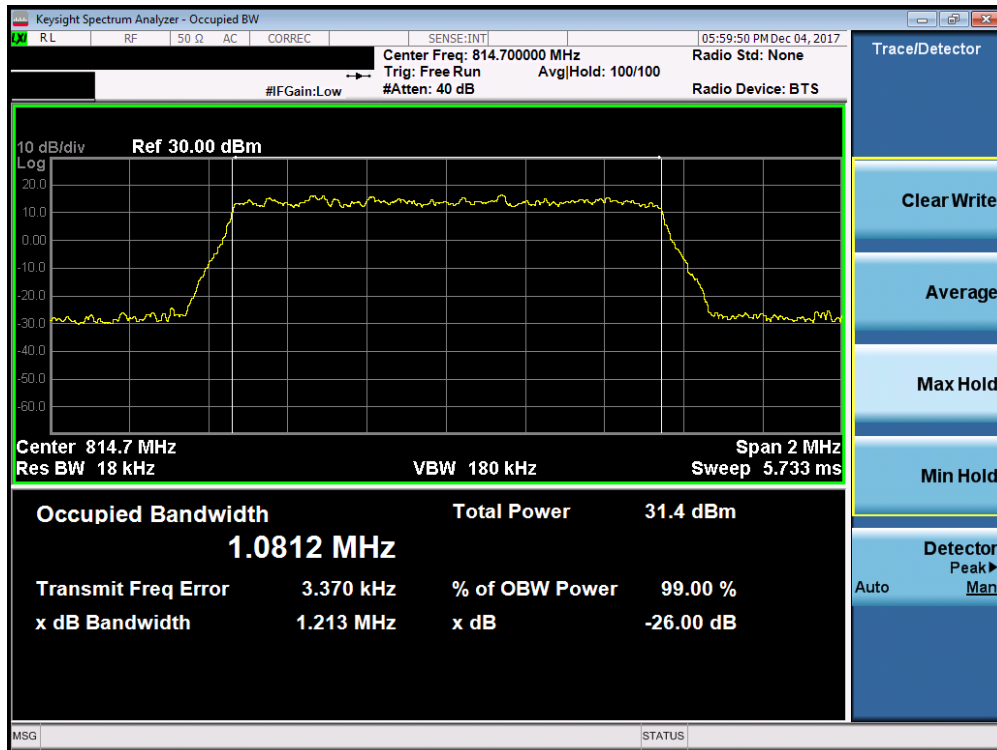


Plot 7-11. Occupied Bandwidth Plot (Band 26 - 1.4MHz 64-QAM – RB Size 6– Low Channel)

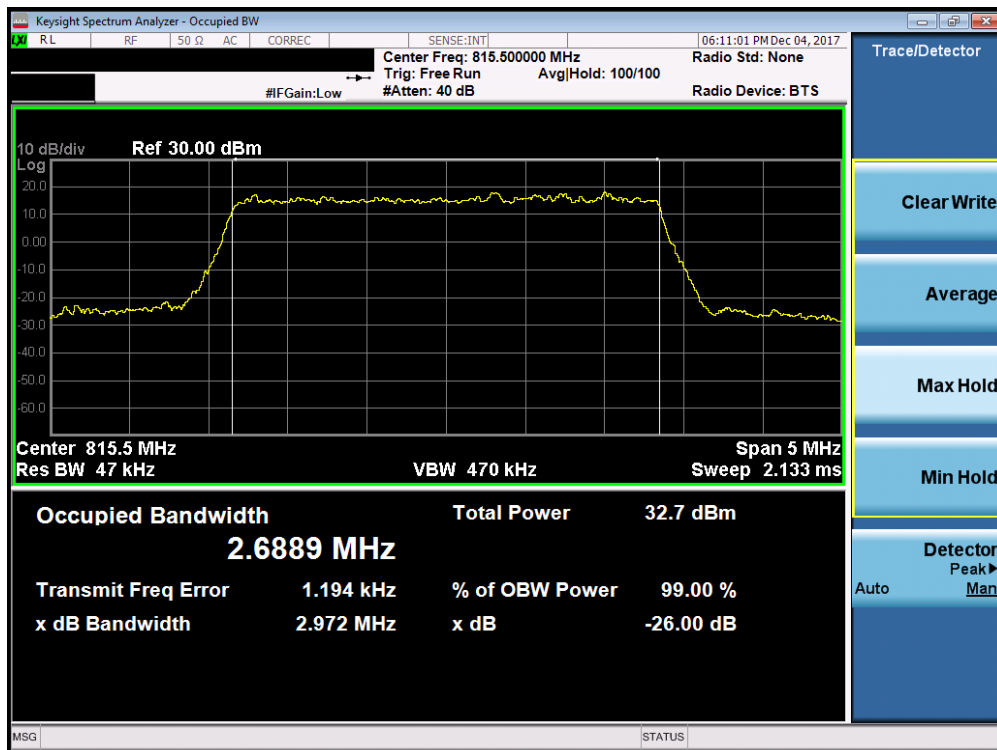


Plot 7-12. Occupied Bandwidth Plot (Band 26 - 3MHz QPSK – RB Size 15– Low Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 17 of 62

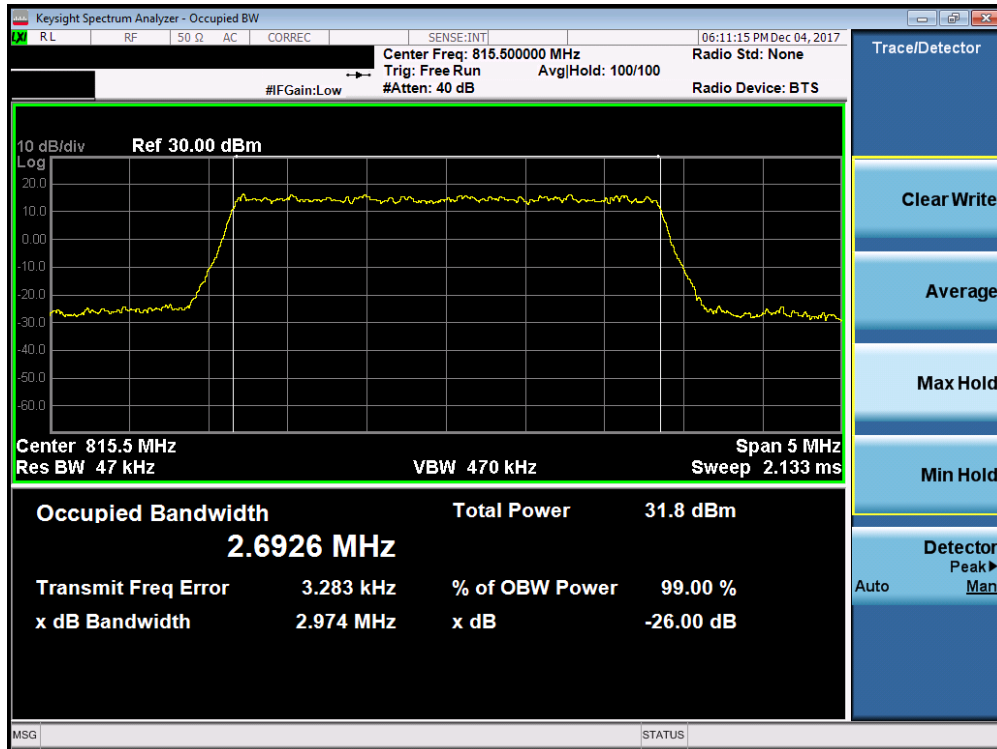


Plot 7-13. Occupied Bandwidth Plot (Band 26 - 3MHz 16-QAM – RB Size 15– Low Channel)

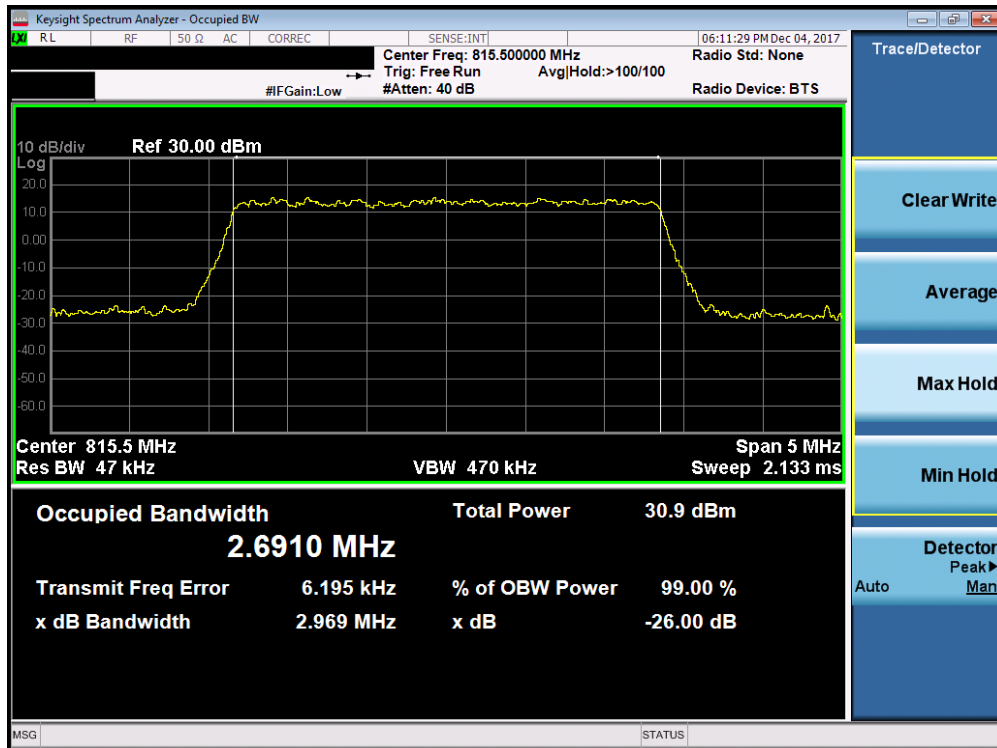


Plot 7-14. Occupied Bandwidth Plot (Band 26 - 3MHz 64-QAM – RB Size 15– Low Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 18 of 62

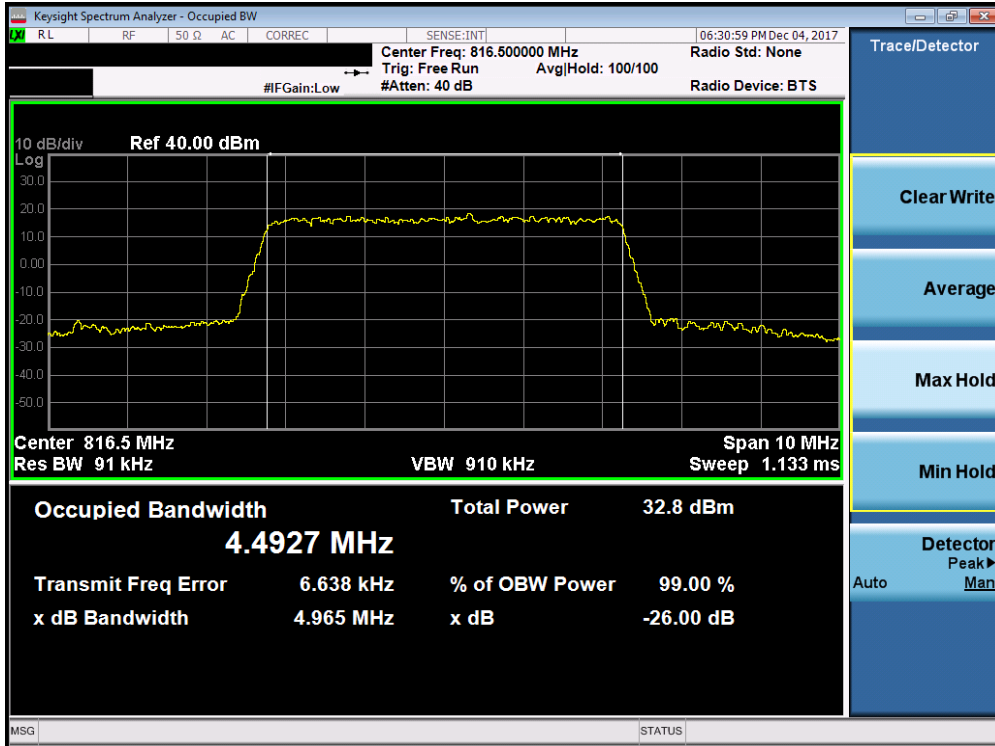


Plot 7-15. Occupied Bandwidth Plot (Band 26 - 5MHz QPSK – RB Size 25– Low Channel)

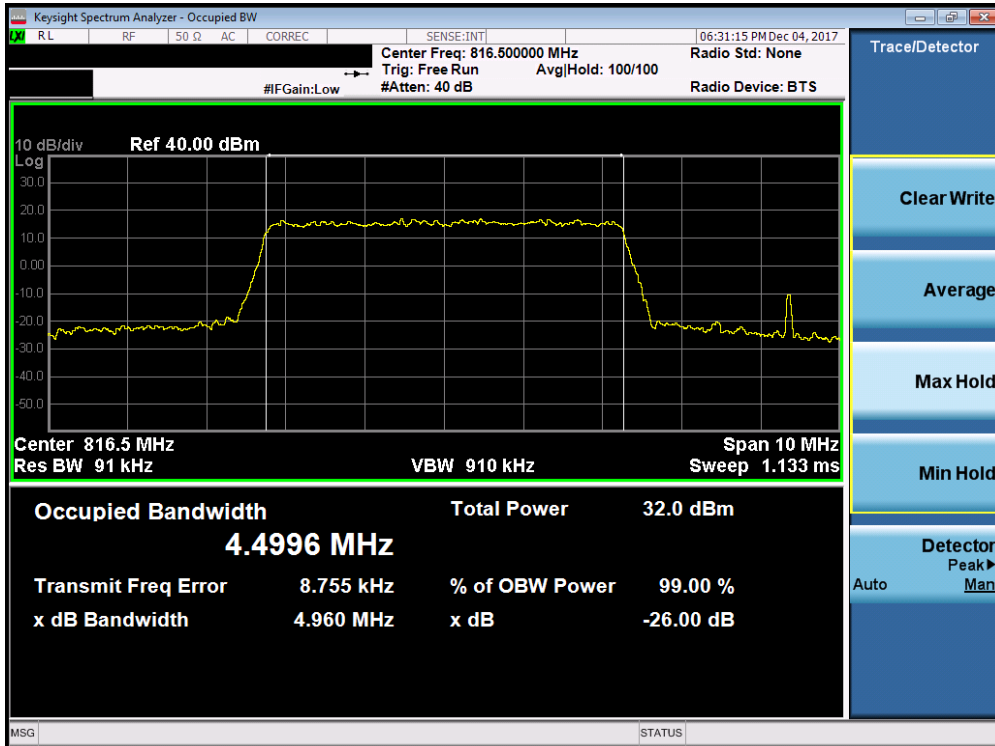


Plot 7-16. Occupied Bandwidth Plot (Band 26 - 5MHz 16-QAM – RB Size 25– Low Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 19 of 62

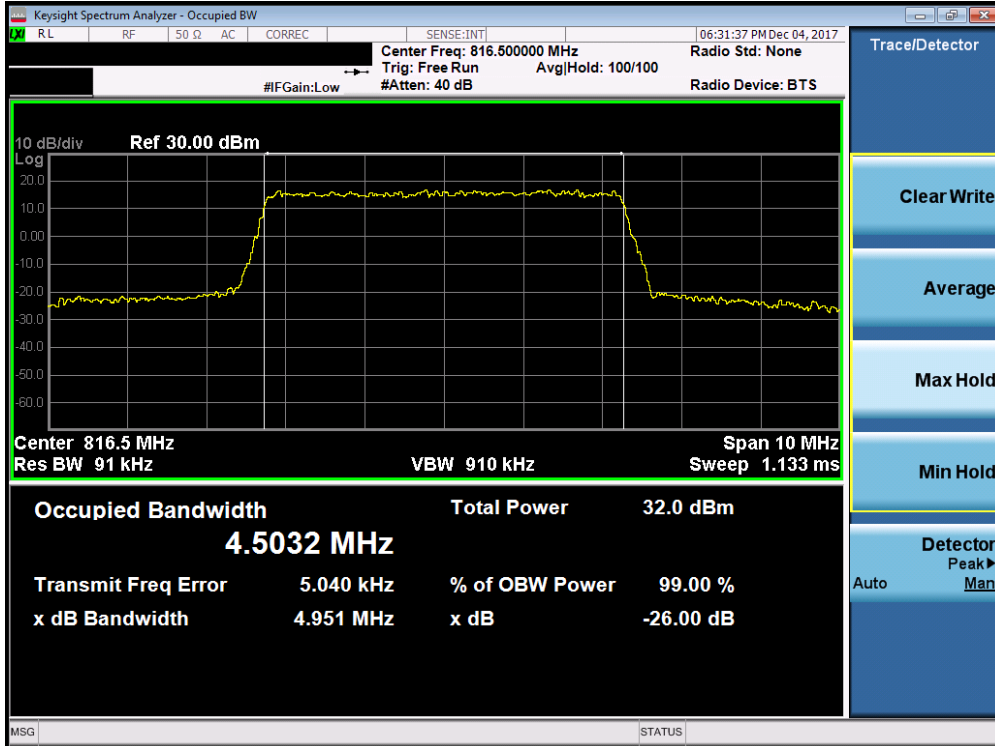


Plot 7-17. Occupied Bandwidth Plot (Band 26 - 5MHz 64-QAM – RB Size 25– Low Channel)

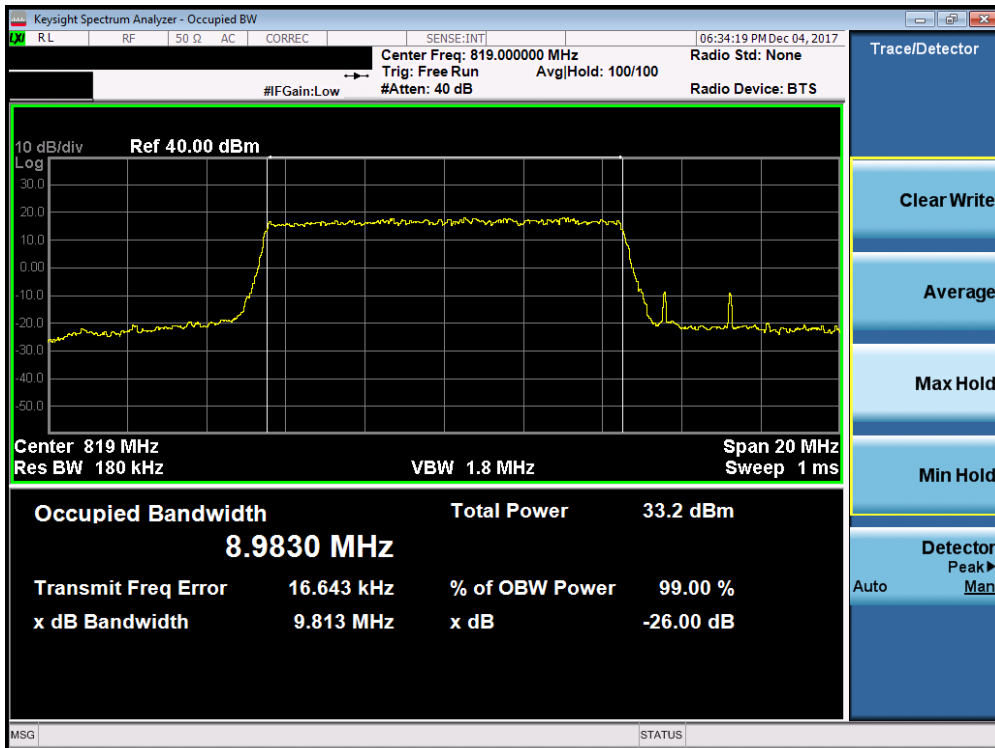


Plot 7-18. Occupied Bandwidth Plot (Band 26 - 10MHz QPSK – RB Size 50)

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 20 of 62

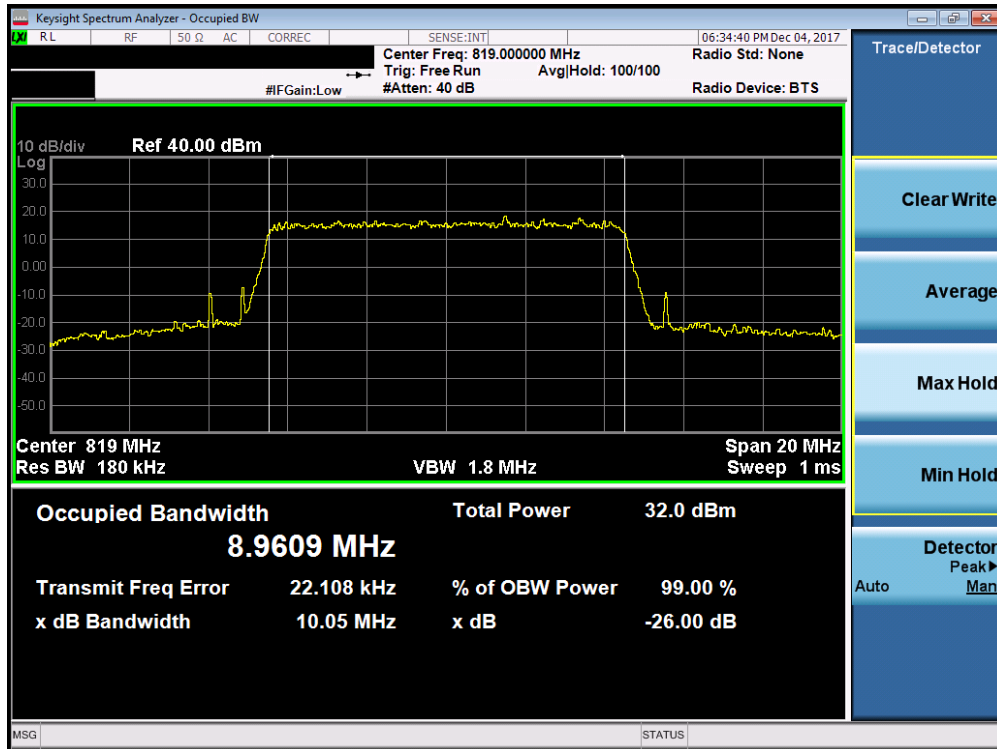


Plot 7-19. Occupied Bandwidth Plot (Band 26 - 10MHz 16-QAM – RB Size 50)

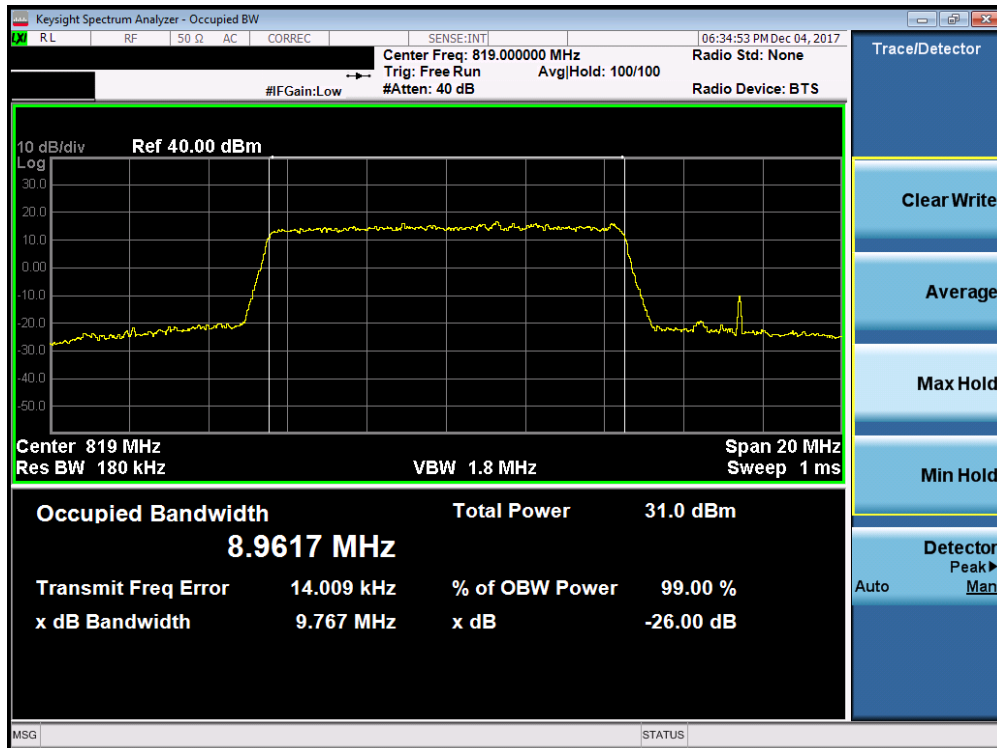


Plot 7-20. Occupied Bandwidth Plot (Band 26 - 10MHz 64-QAM – RB Size 50)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 21 of 62

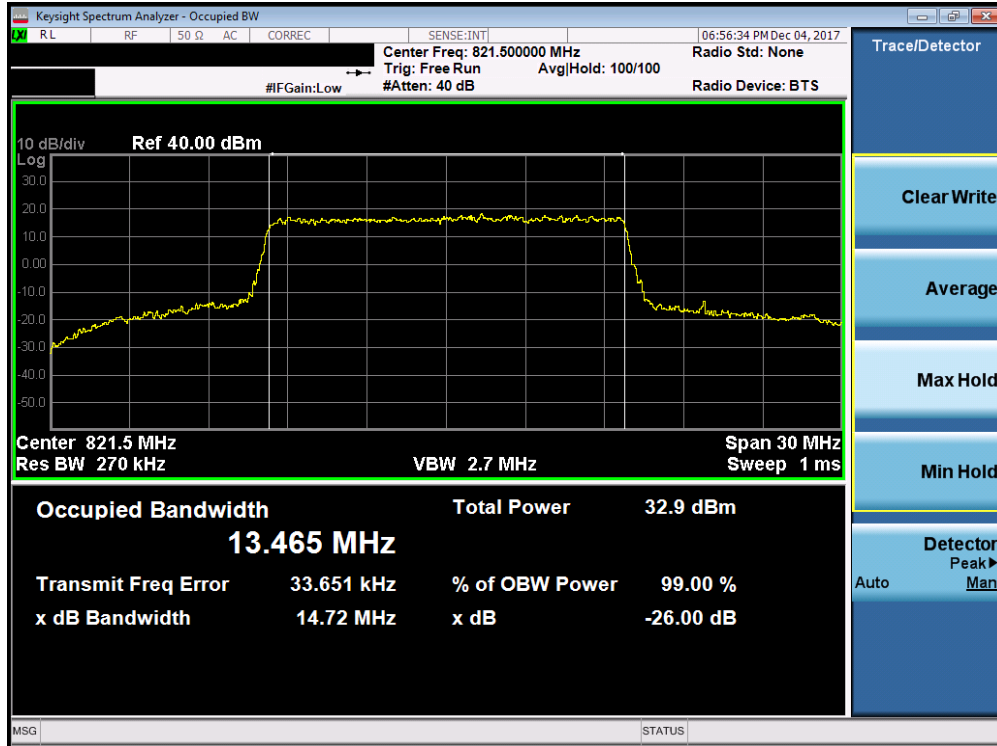


Plot 7-21. Occupied Bandwidth Plot (Band 26 - 15MHz QPSK – RB Size 75)

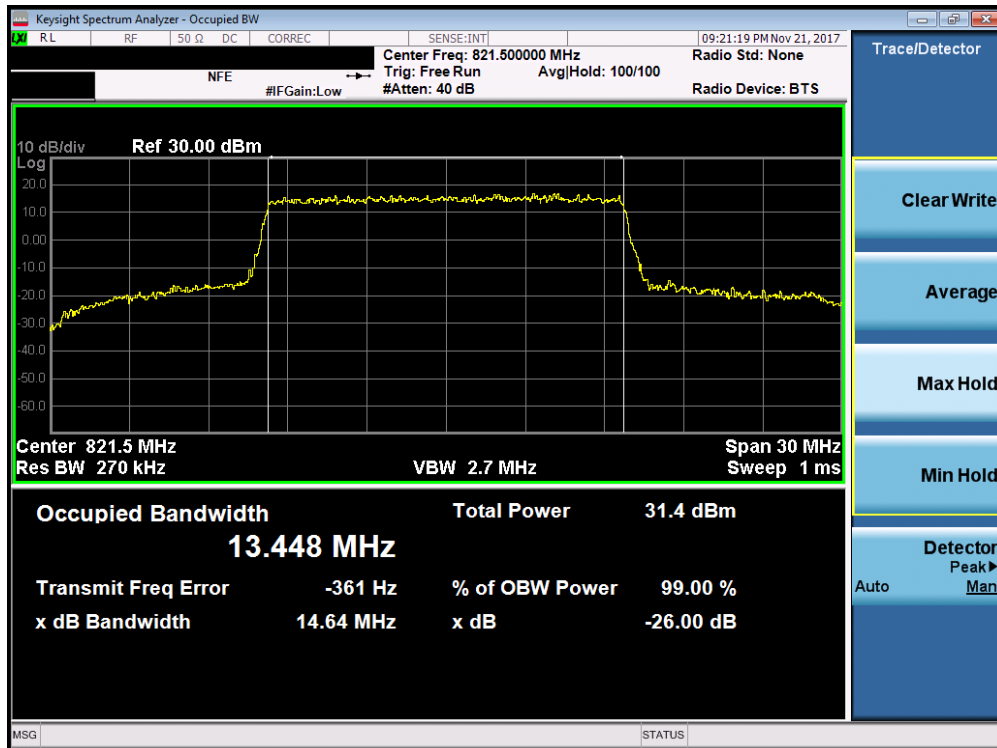

Plot 7-22. Occupied Bandwidth Plot (Band 26 - 15MHz 16-QAM – RB Size 75)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 22 of 62

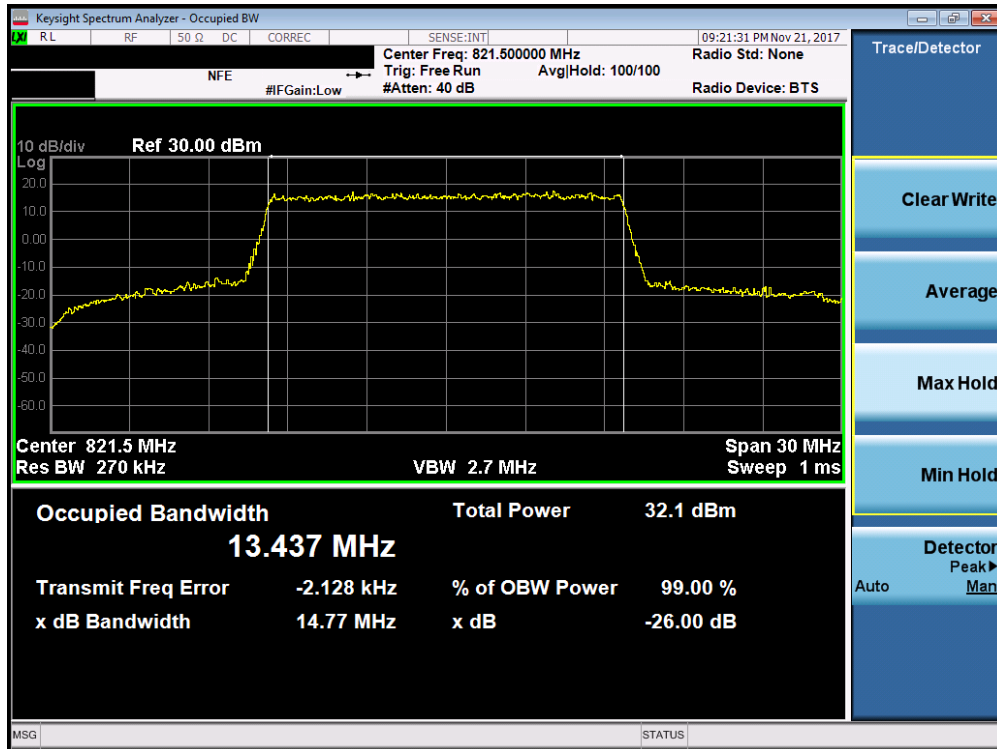

**Plot 7-23. Occupied Bandwidth Plot (Band 26 - 15MHz 64-QAM – RB Size 75)**

FCC ID: A3LSMG965U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 23 of 62	

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal

**§2.1051 §90.543 §90.691**

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.**

#### Test Procedure Used


KDB 971168 D01 v03 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  1MHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

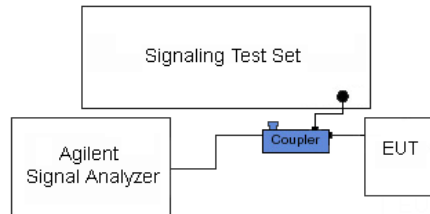

**Figure 7-2. Test Instrument & Measurement Setup**


#### Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 24 of 62



**CDMA**

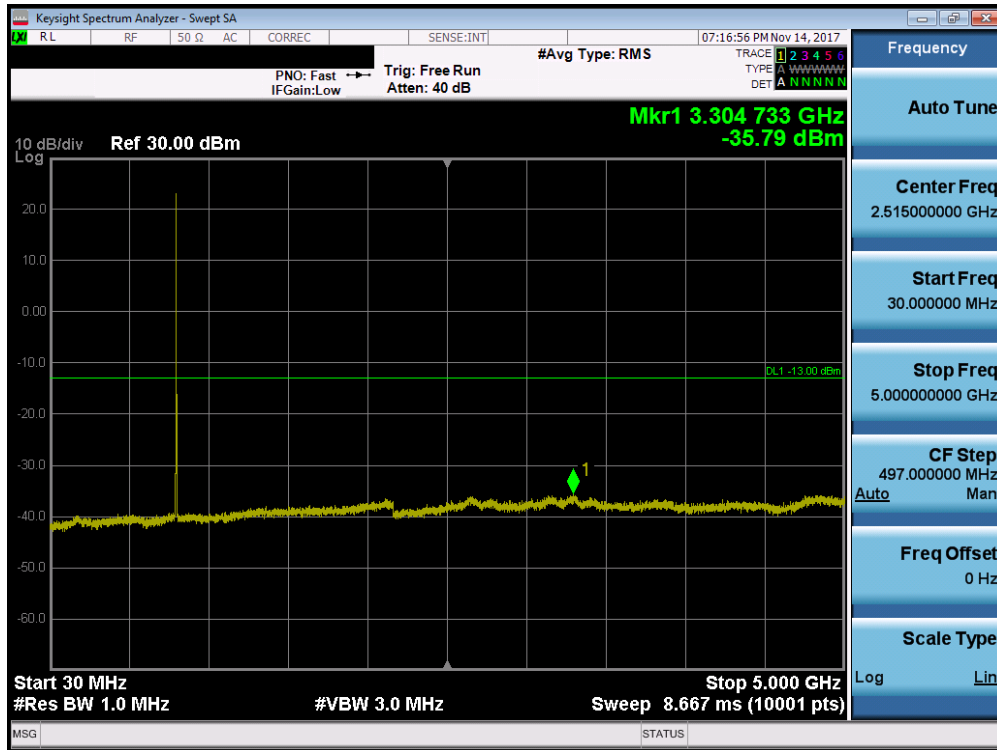


**Plot 7-24. Conducted Spurious Plot (CDMA, Ch. 476)**

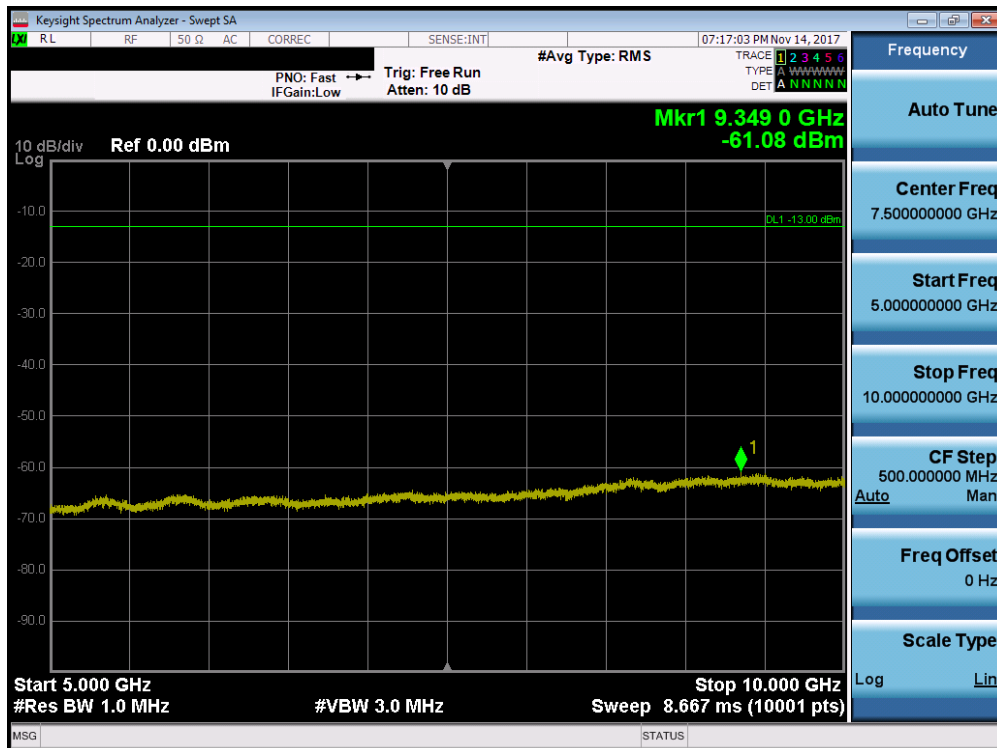


**Plot 7-25. Conducted Spurious Plot (CDMA, Ch. 476)**

FCC ID: A3LSMG965U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 25 of 62

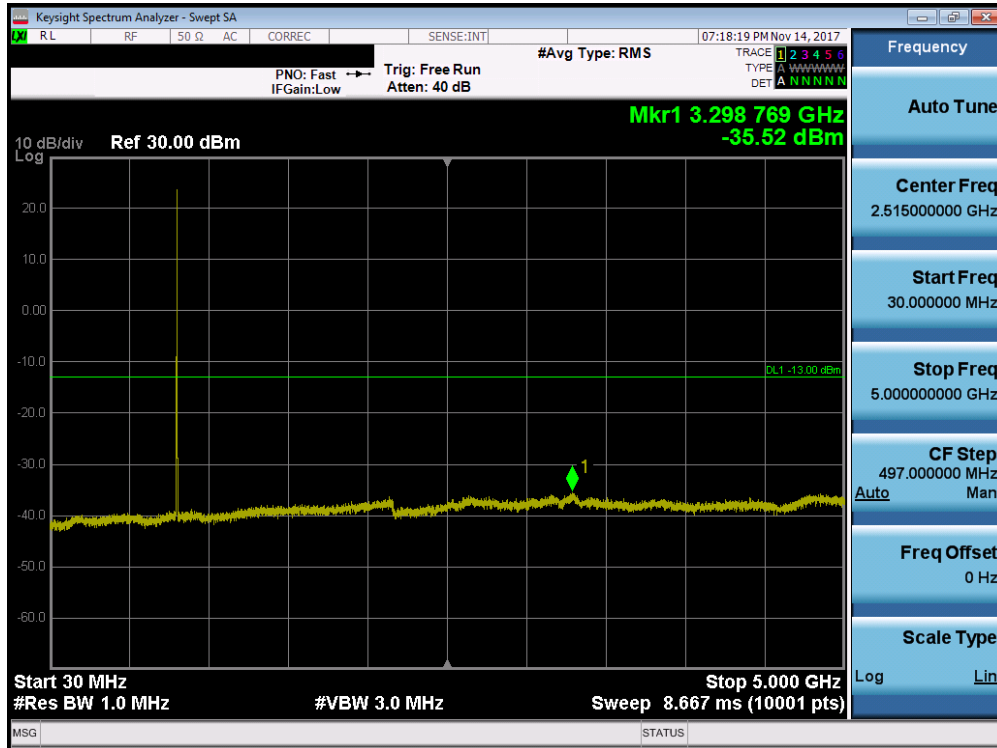


Plot 7-26. Conducted Spurious Plot (CDMA, Ch. 684)

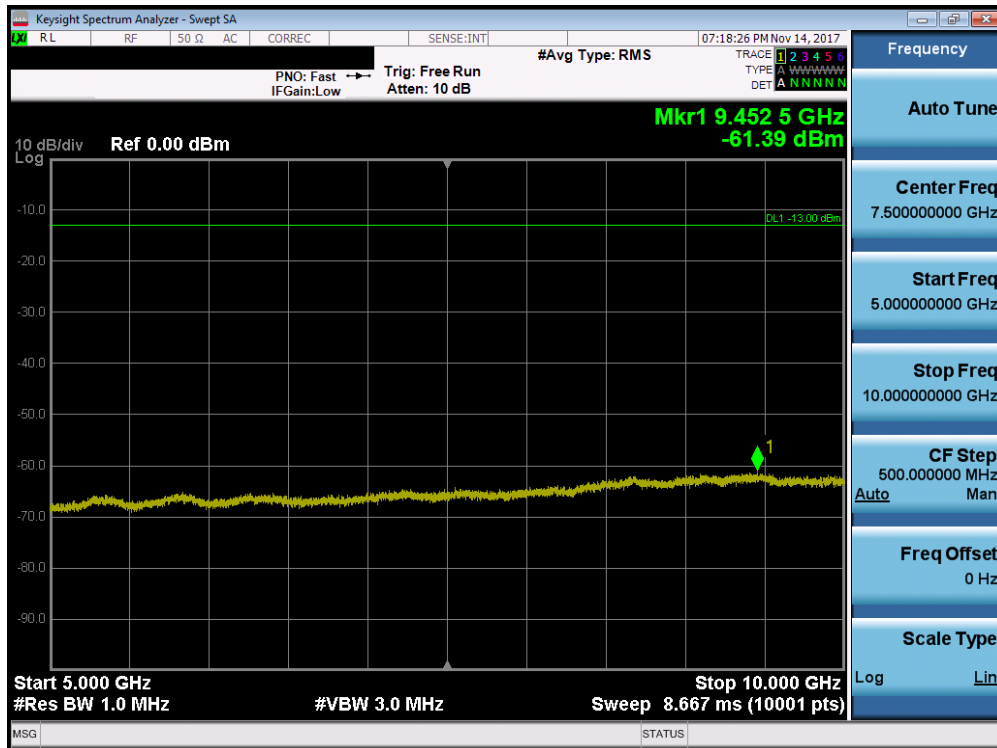


Plot 7-27. Conducted Spurious Plot (CDMA, Ch. 684)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 26 of 62

**Band 14**

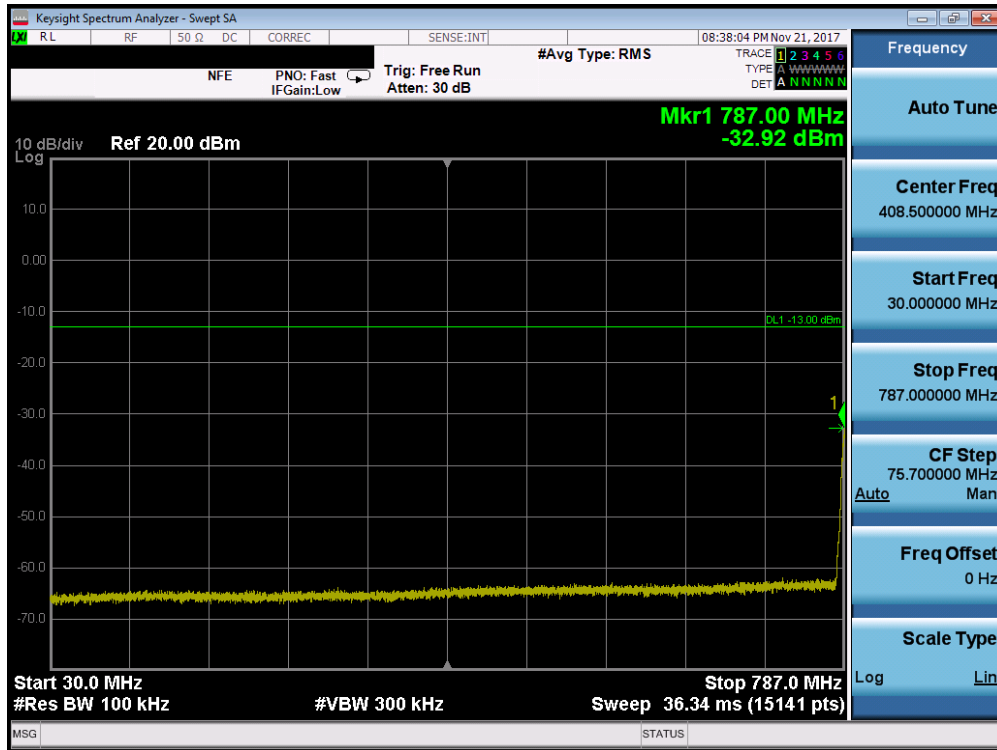


**Plot 7-28. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – Low Channel)**

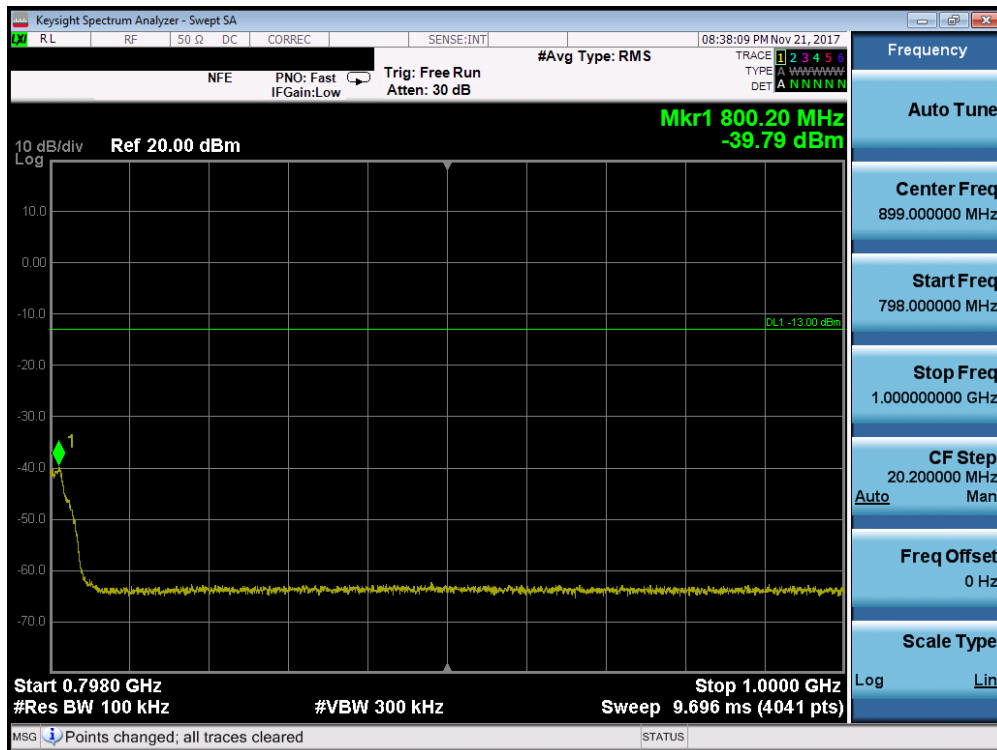


**Plot 7-29. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – Low Channel)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 27 of 62

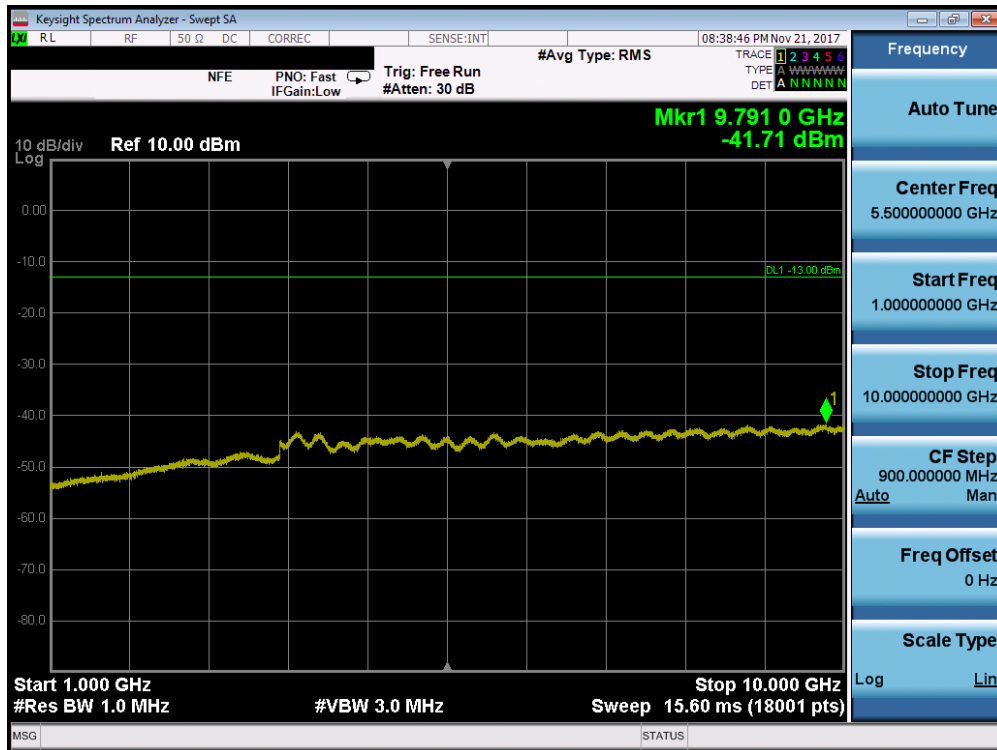


Plot 7-30. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – Low Channel)

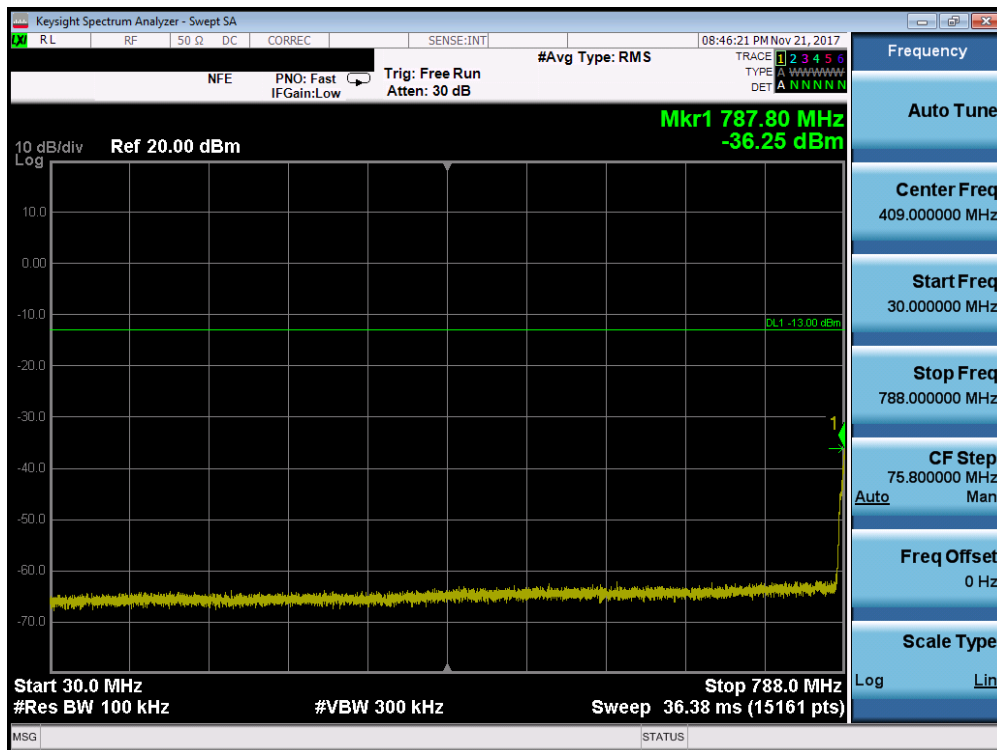


Plot 7-31. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 28 of 62

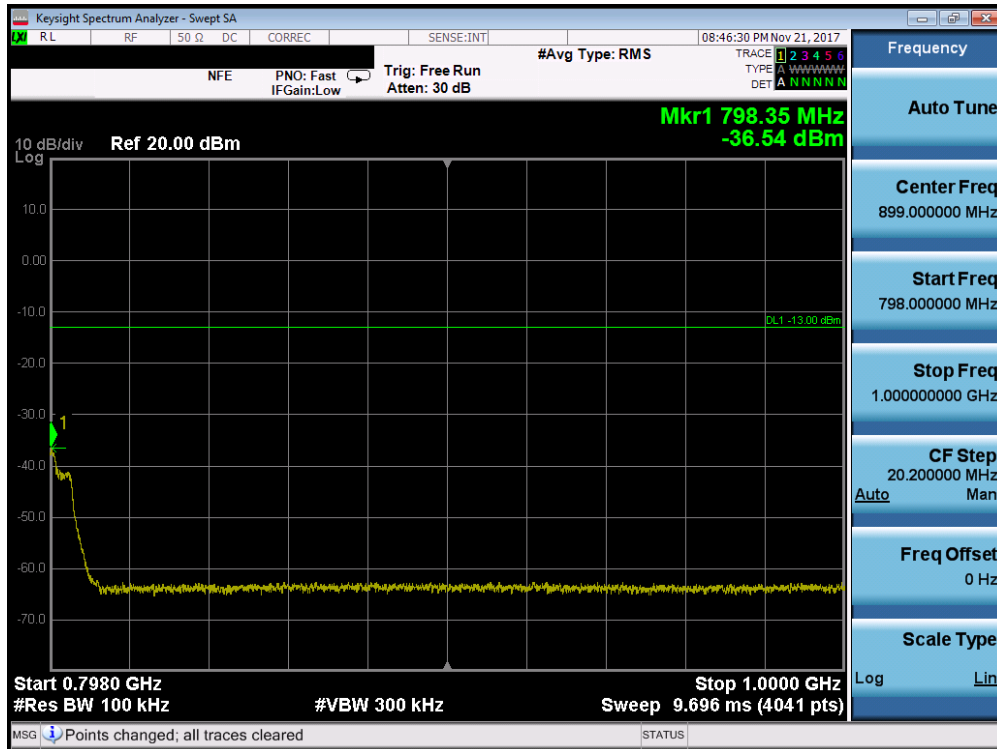


Plot 7-32. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – Mid Channel)

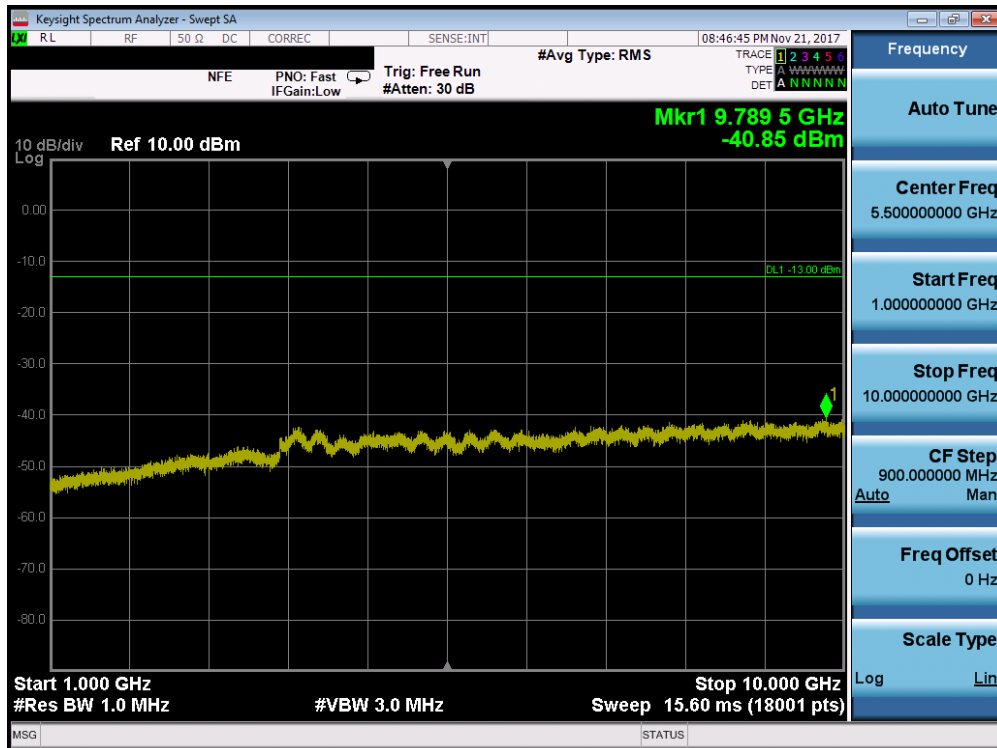


Plot 7-33. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 29 of 62

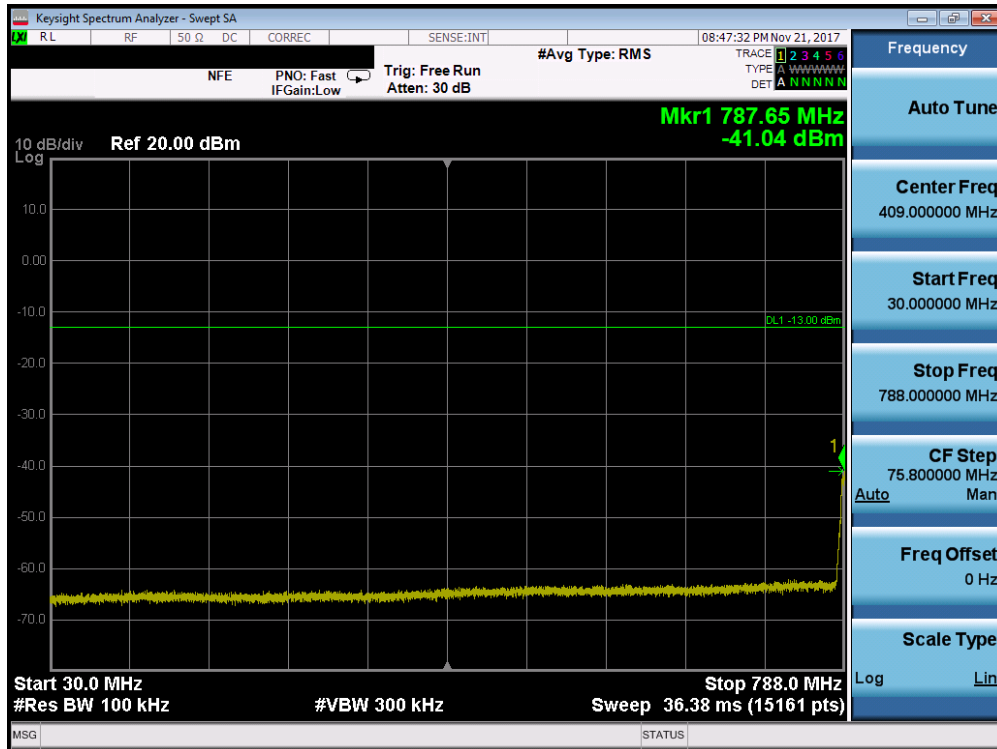


Plot 7-34. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – High Channel)

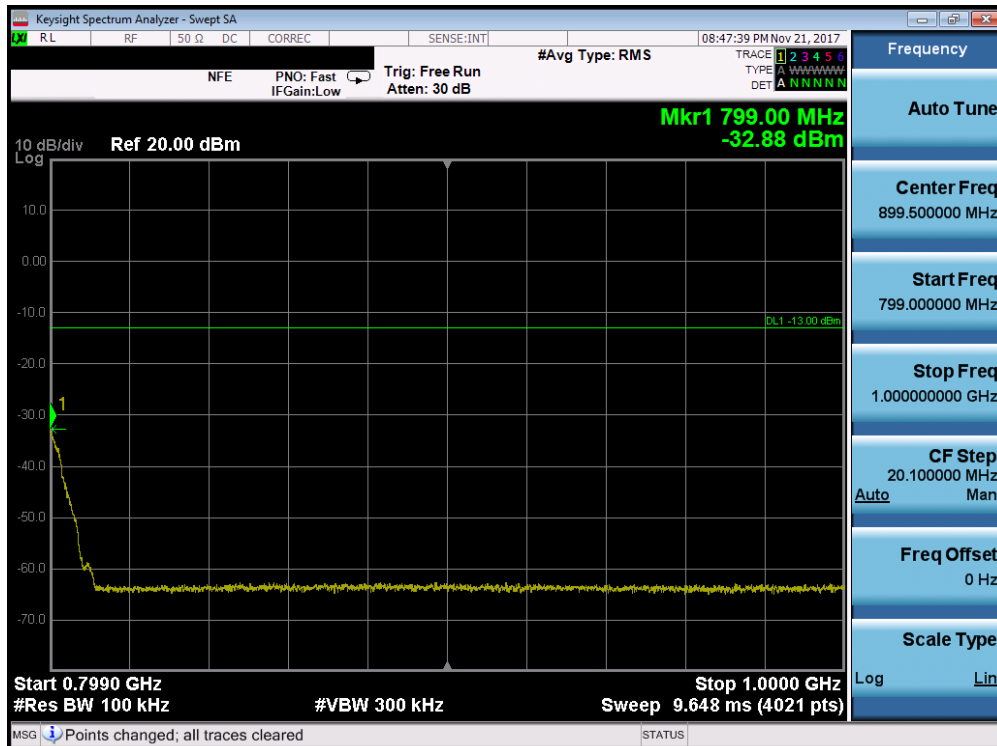

Plot 7-35. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – High Channel)


FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 30 of 62

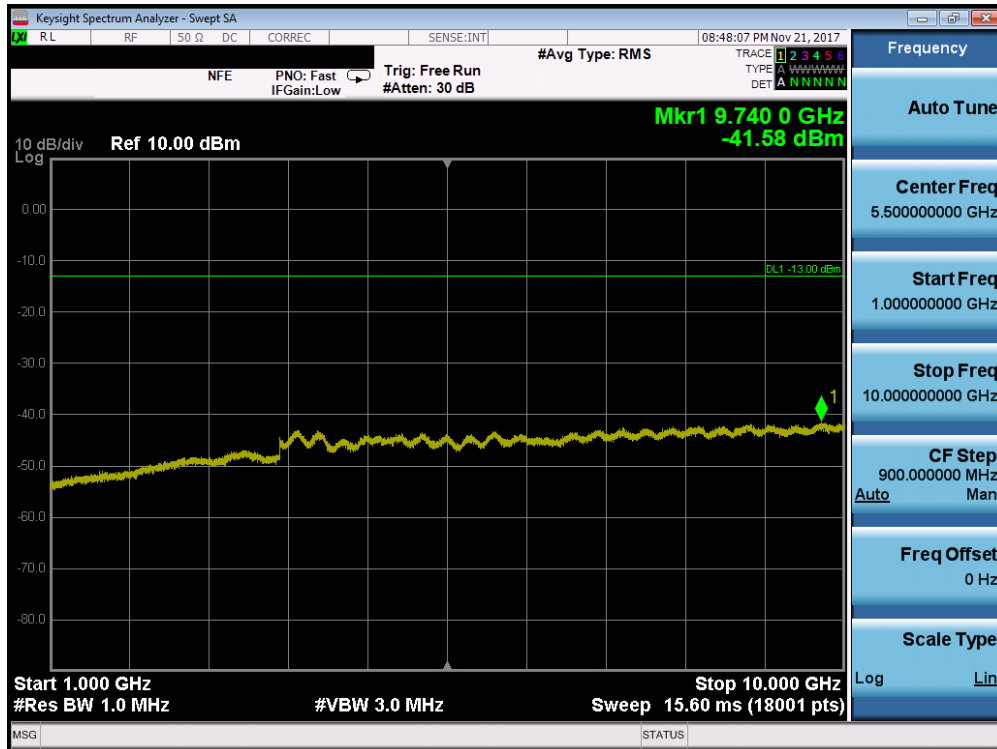


Plot 7-36. Conducted Spurious Plot (Band 14 - 5.0MHz QPSK - RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMG965U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 31 of 62	

**Band 26**

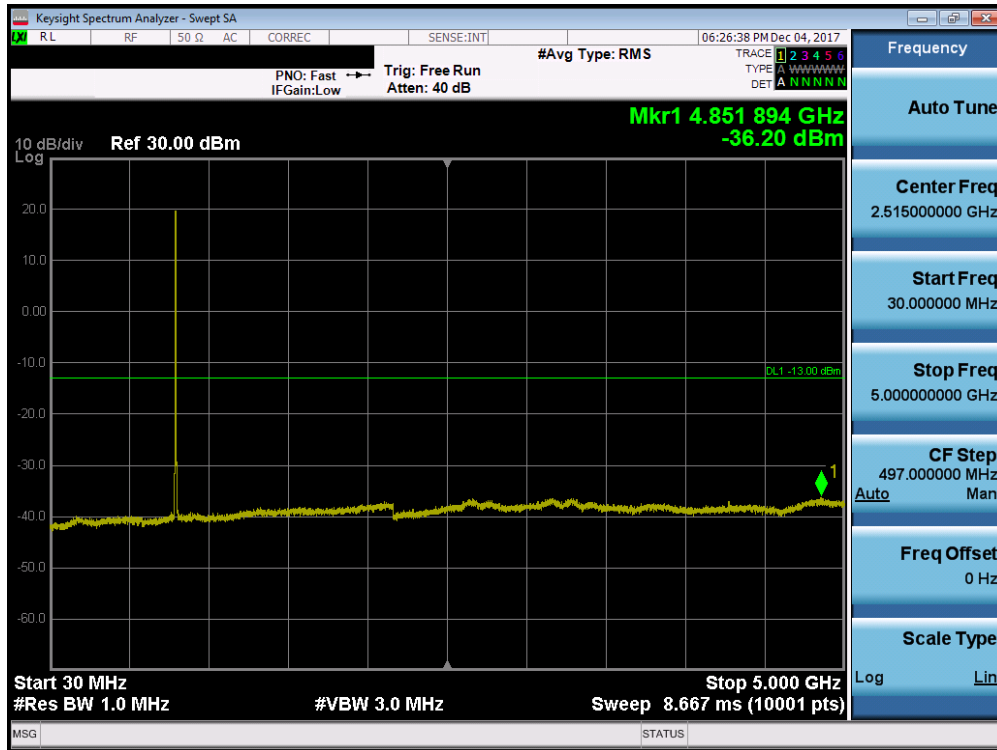


Plot 7-37. Conducted Spurious Plot (Band 26 – 3.0 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

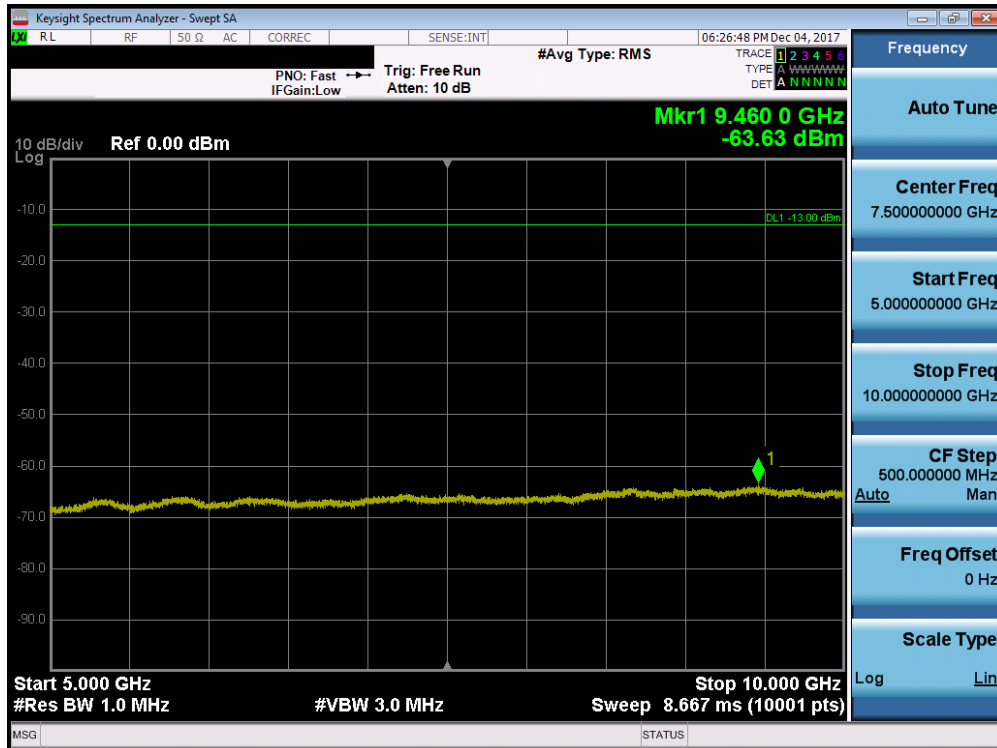


Plot 7-38. Conducted Spurious Plot (Band 26 – 3.0 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 32 of 62



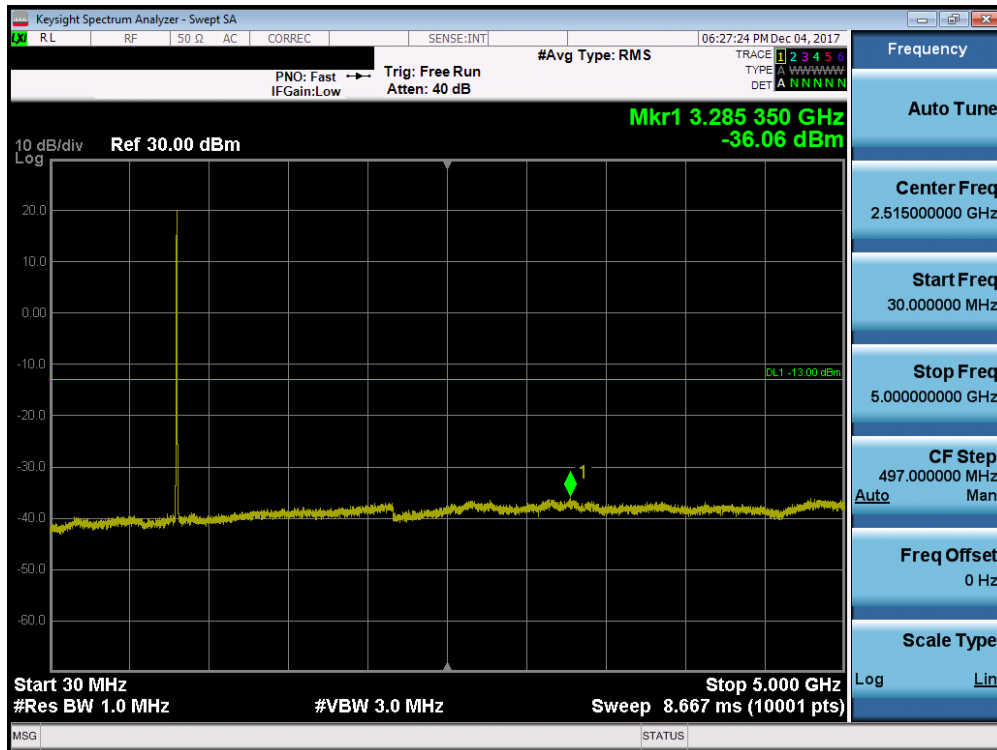

Plot 7-39. Conducted Spurious Plot (Band 26 – 3.0 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

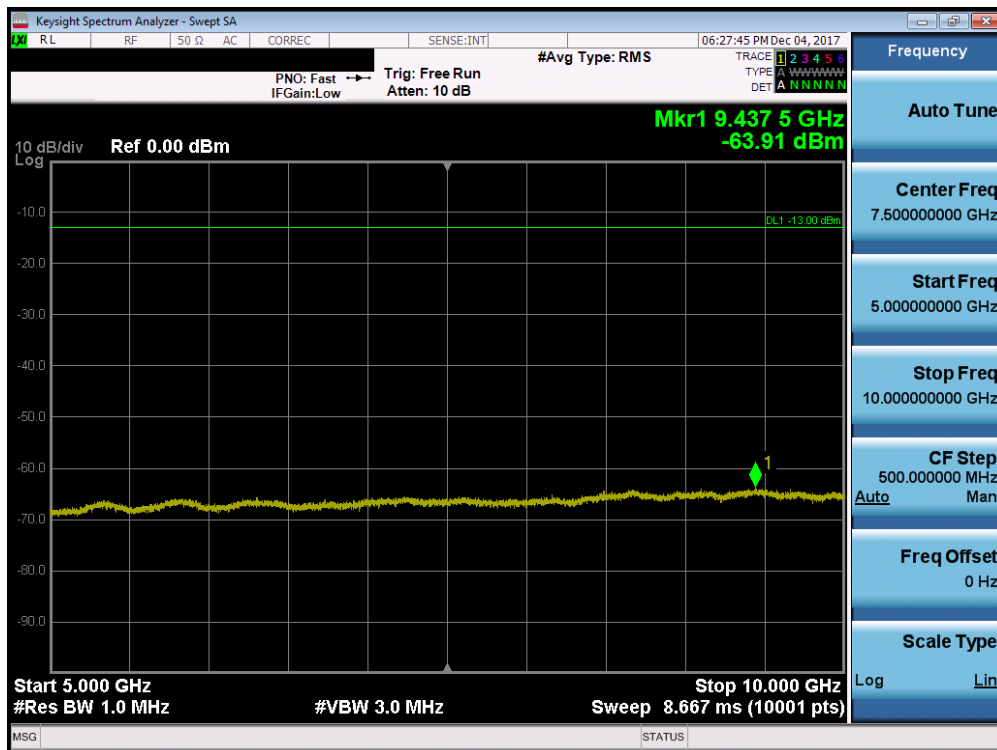

Plot 7-40. Conducted Spurious Plot (Band 26 – 3.0 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 33 of 62

## 7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.543 §90.691

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission removed from the CDMA and Band 26 frequency block by greater than 37.5 kHz is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.**

**The minimum permissible attenuation level of any spurious emission removed from the CDMA and Band 26 frequency block by up to and including 37.5 kHz is  $50 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.**

**For Band 14, the minimum permissible attenuation on any frequencies between 775-788 MHz, above 805 MHz, and below 758MHz, shall be at least  $43 + \log_{10}(P_{[Watts]})$ . On all frequencies between 769-775 MHz and 799-805 MHz, minimum permissible attenuation shall be at least than  $65 + 10 \log_{10}(P_{[Watts]})$  in a 6.25kHz band segment.**

### Test Procedure Used

KDB 971168 D01 v03 – Section 6.0

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

### Test Notes


For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block of LTE Band 26 a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2-A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 34 of 62




Plot 7-41. Channel Edge Plot (CDMA BC10 - Ch. 476)

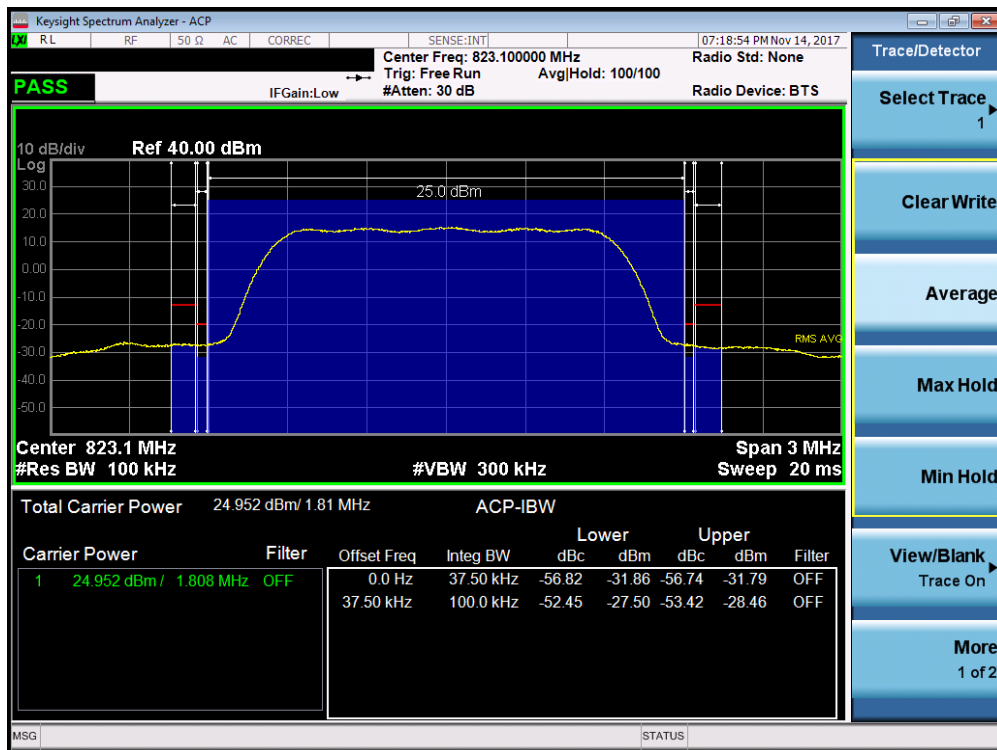


Plot 7-42. Channel Edge Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 35 of 62

**Band 14**

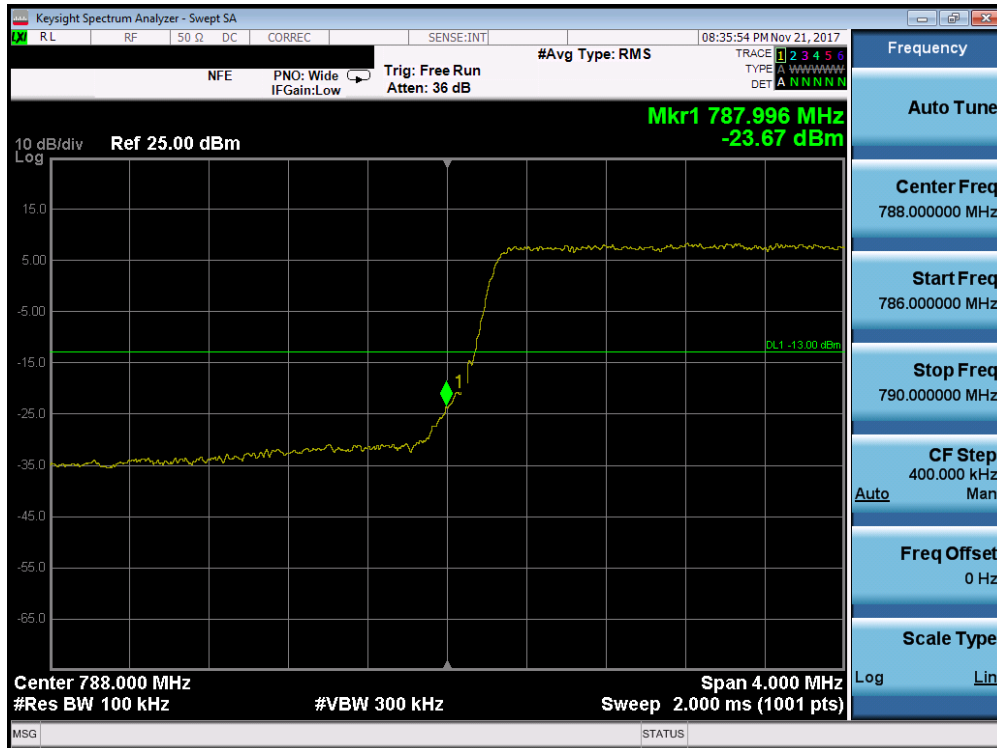

**Plot 7-43. Lower Band Edge Plot (Band 14 - 5.0MHz QPSK - Full RB Configuration)**

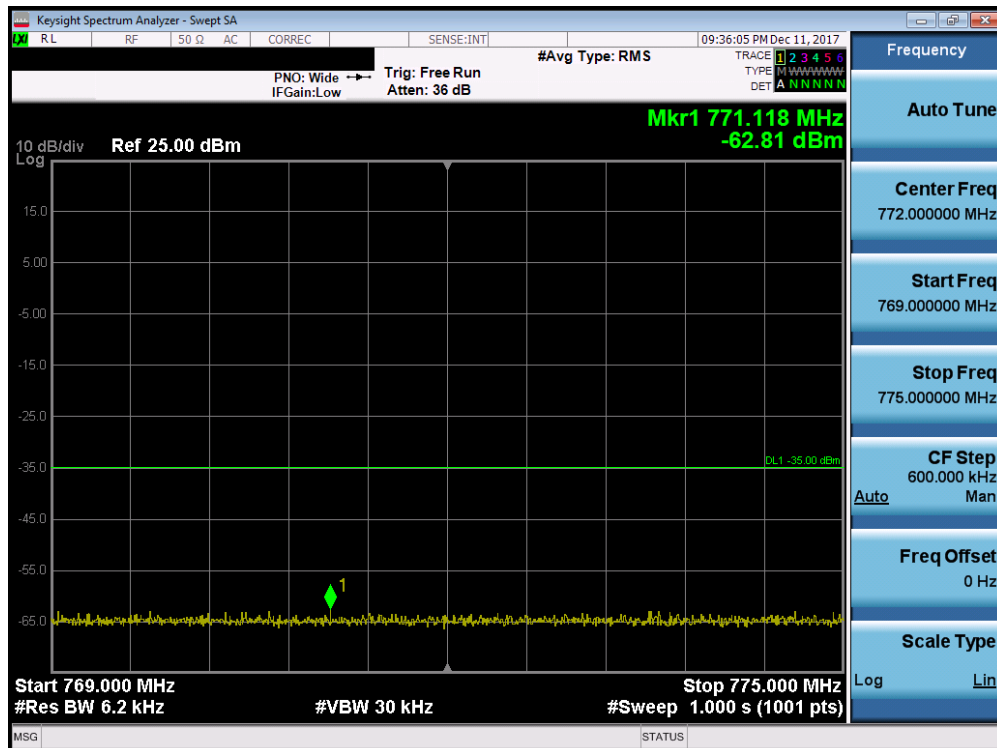


**Plot 7-44. Lower Emission Mask Edge Plot (Band 14 – 5.0MHz QPSK – Full RB Configuration)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 36 of 62




Plot 7-45. Upper Band Edge Plot (Band 14 - 5.0MHz QPSK - Full RB Configuration)

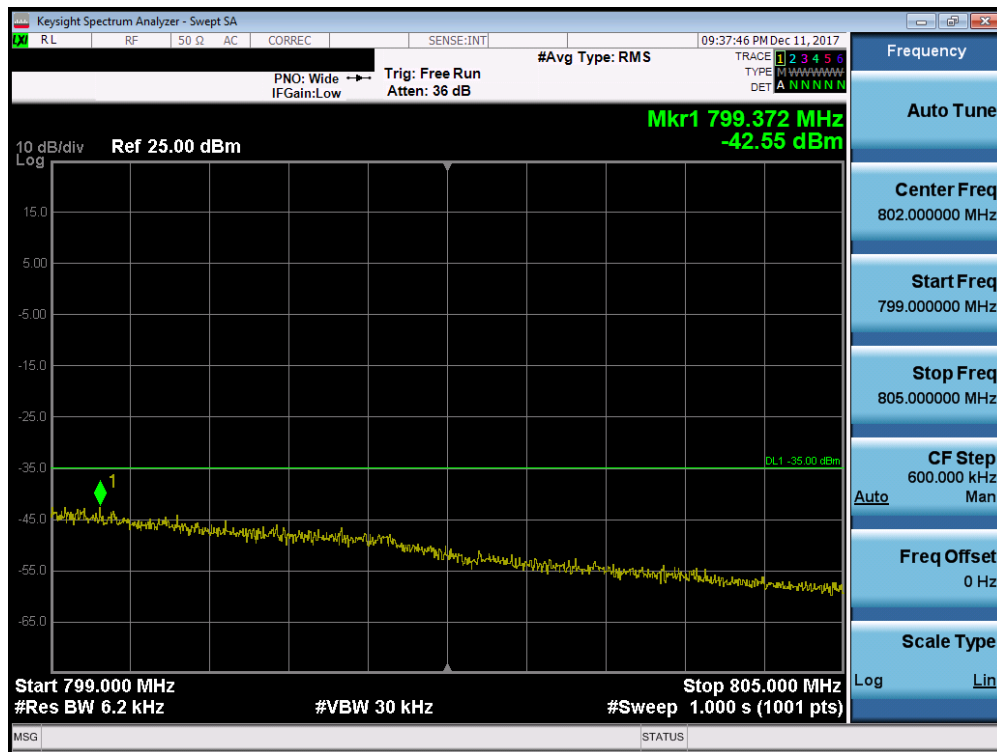


Plot 7-46. Lower Emission Mask Edge Plot (Band 14 – 5.0MHz QPSK – Full RB Configuration)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 37 of 62

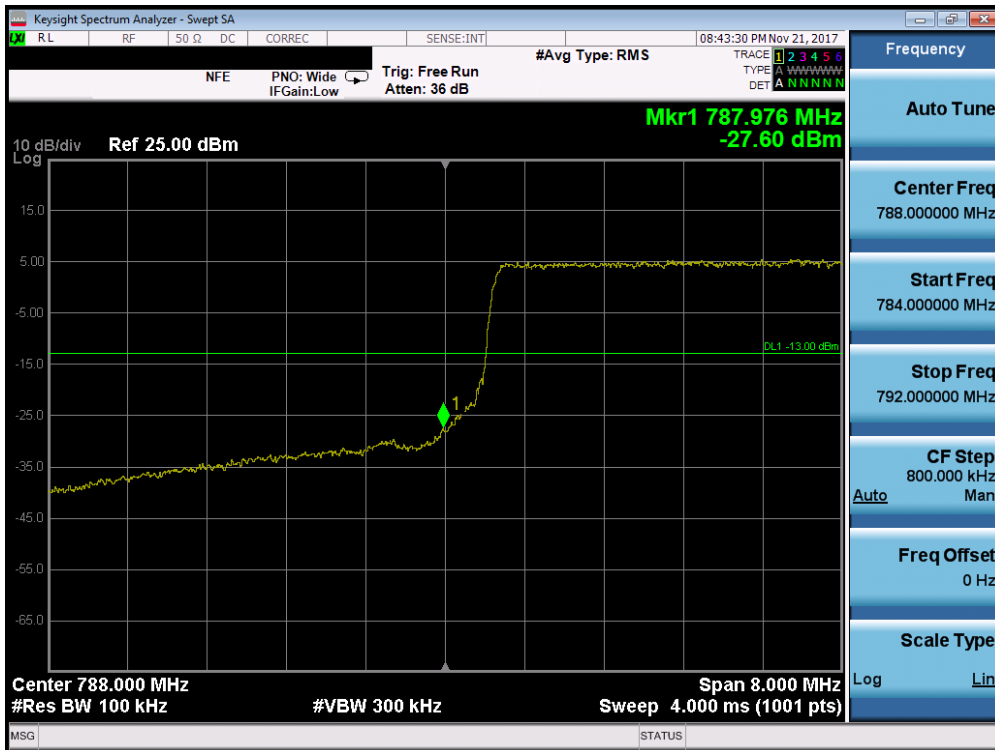


Plot 7-47. Lower Band Edge Plot (Band 14 - 10.0MHz QPSK - Full RB Configuration)

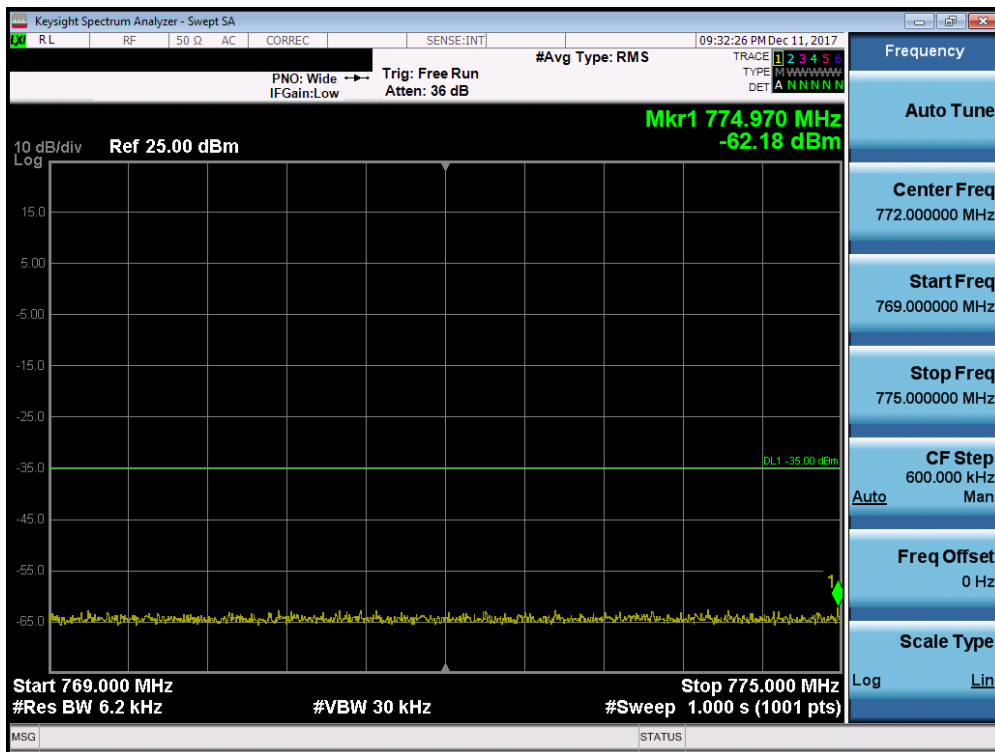


Plot 7-48. Lower Emission Mask Edge Plot (Band 14 – 10.0MHz QPSK – Full RB Configuration)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 38 of 62

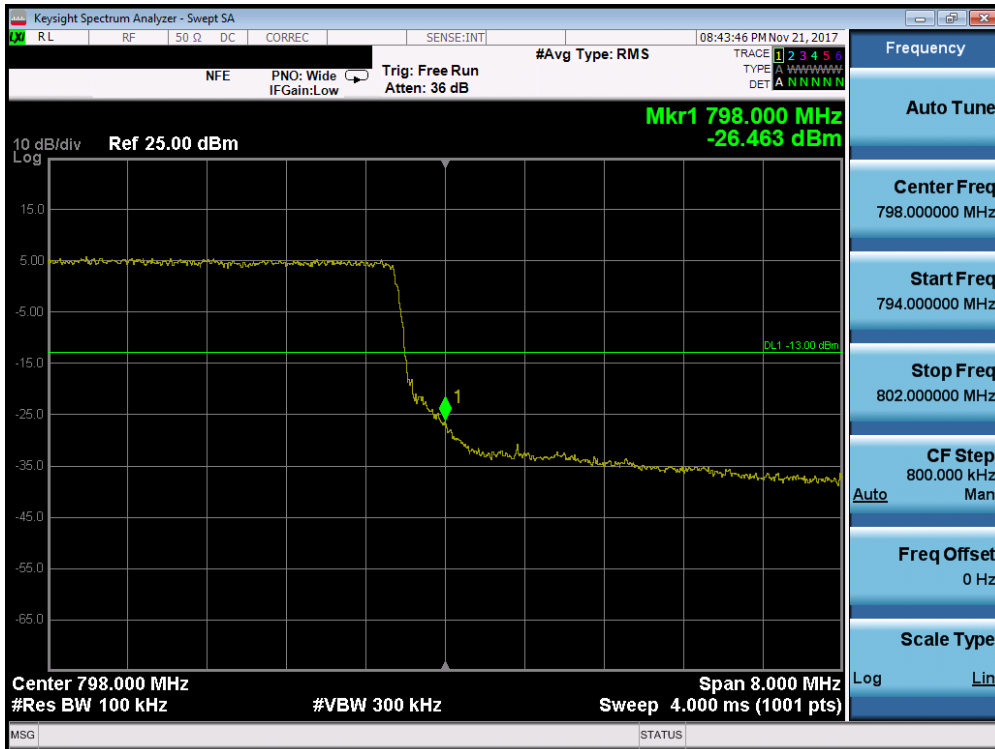


Plot 7-49. Upper Band Edge Plot (Band 14 - 10.0MHz QPSK - Full RB Configuration)

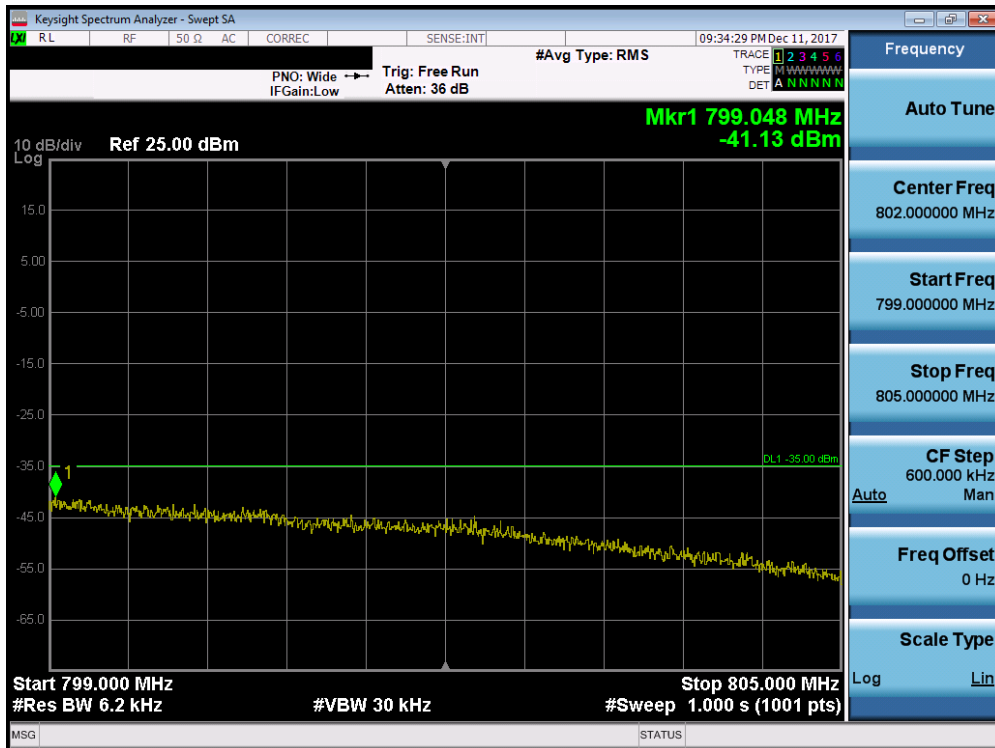


Plot 7-50. Lower Emission Mask Edge Plot (Band 14 – 10.0MHz QPSK – Full RB Configuration)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 39 of 62

**Band 26**

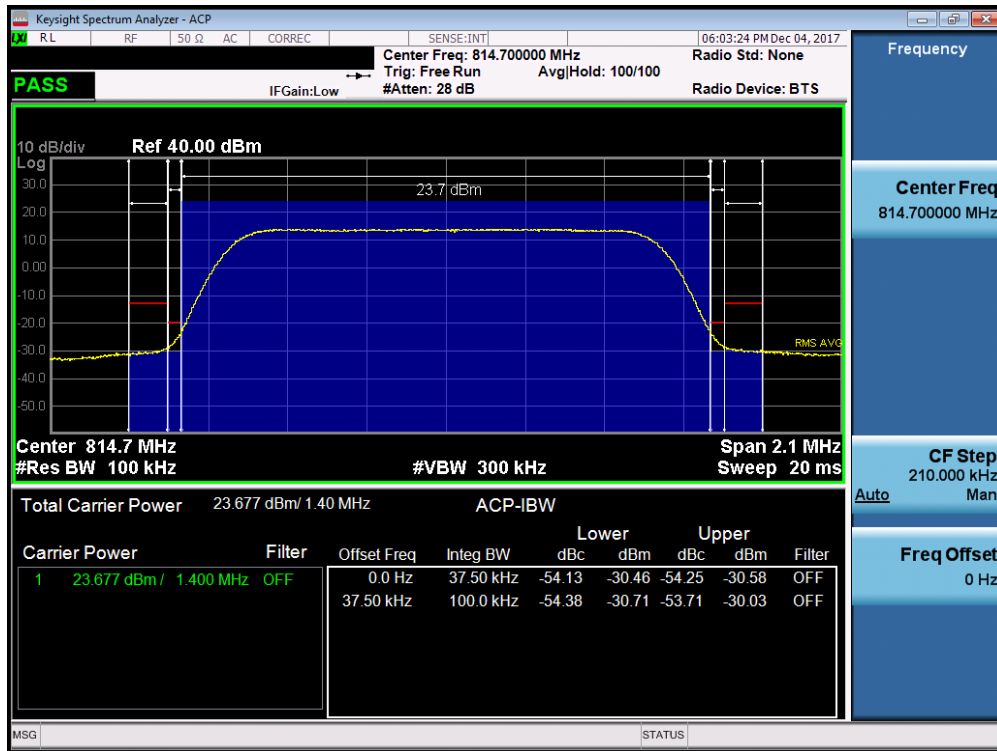


**Plot 7-51. Channel Edge Plot (1.4MHz QPSK – RB Size 6– Low Channel)**

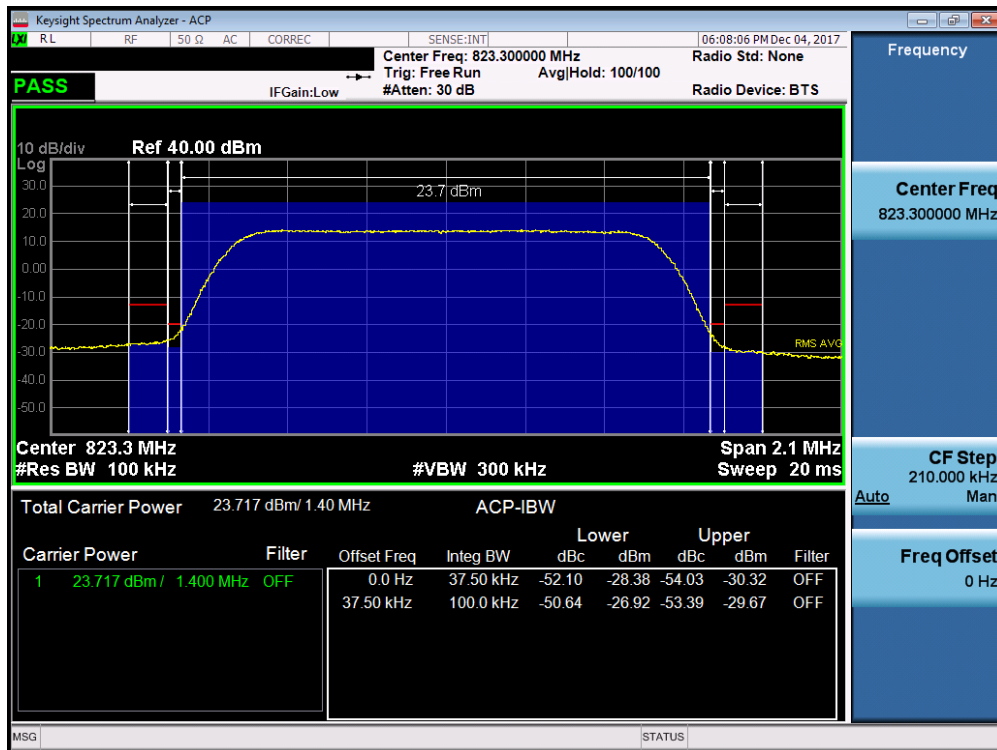


**Plot 7-52. Channel Edge Plot (1.4MHz QPSK – RB Size 6 – High Channel)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 40 of 62



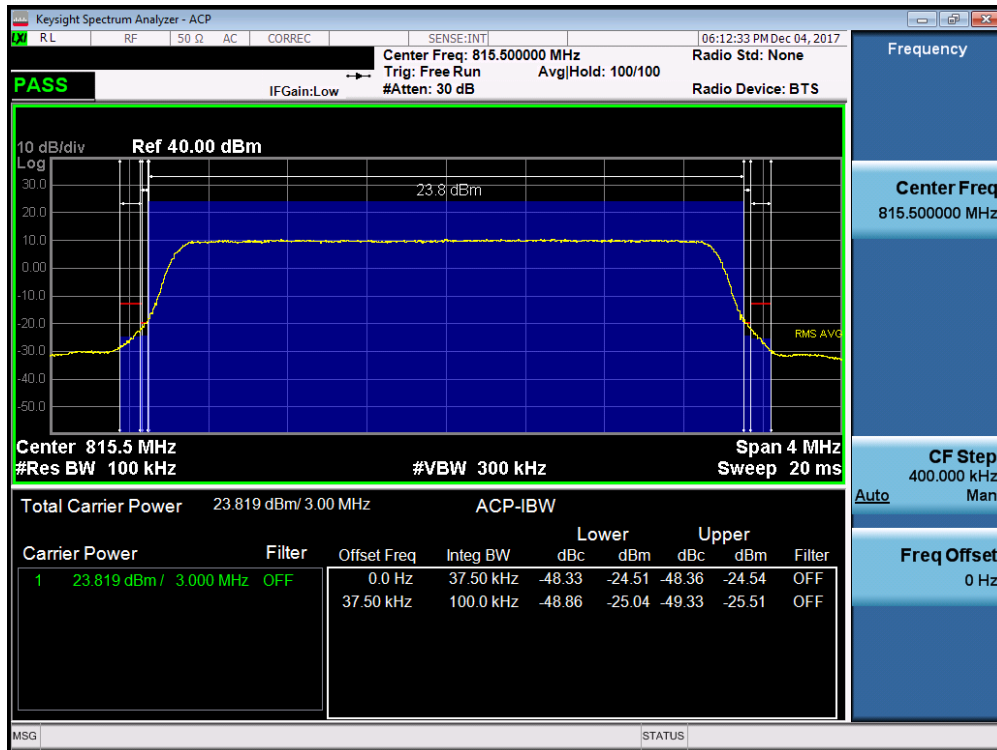


Plot 7-53. Channel Edge Plot (3MHz QPSK – RB Size 15– Low Channel)

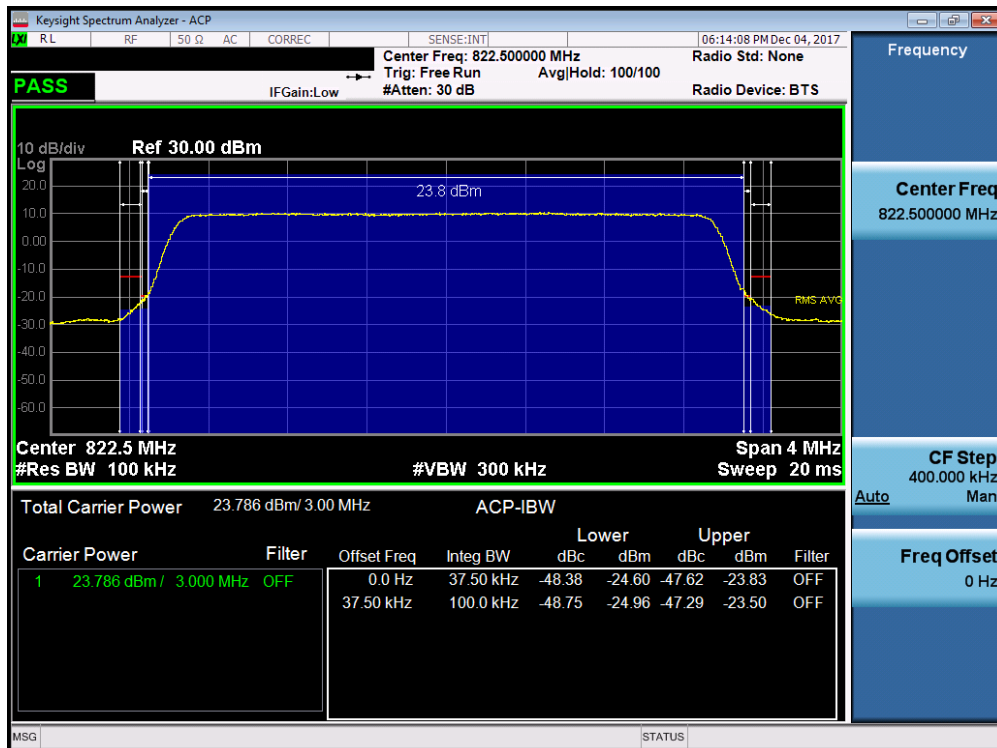


Plot 7-54. Channel Edge Plot (3MHz QPSK – RB Size 15 – High Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 41 of 62

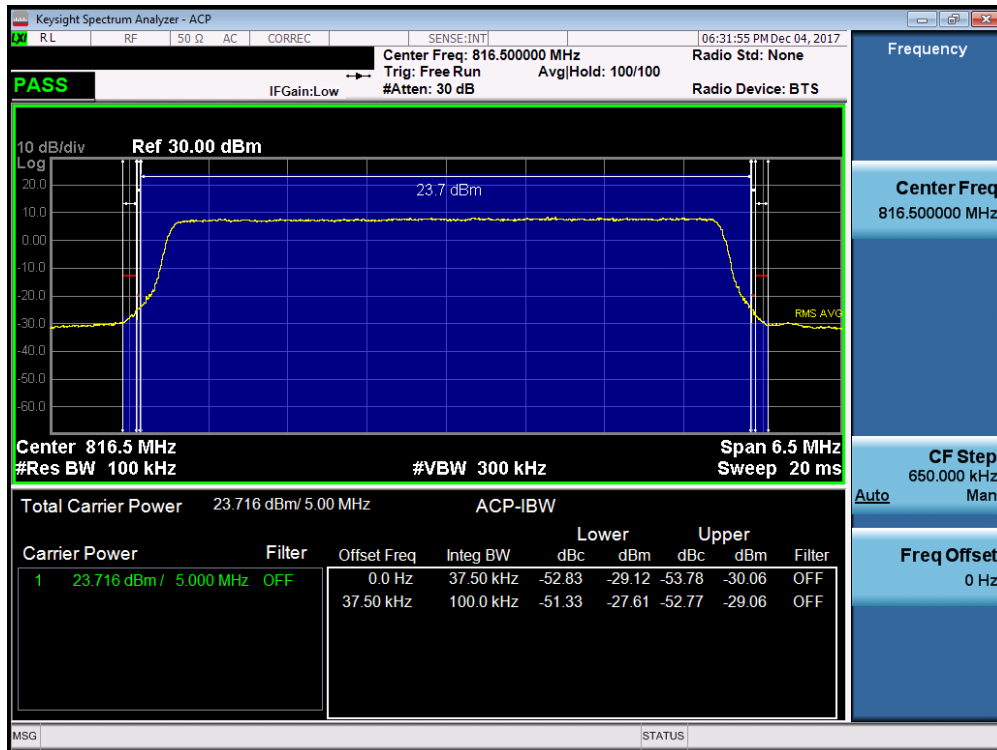


Plot 7-55. Channel Edge Plot (5MHz QPSK – RB Size 25– Low Channel)

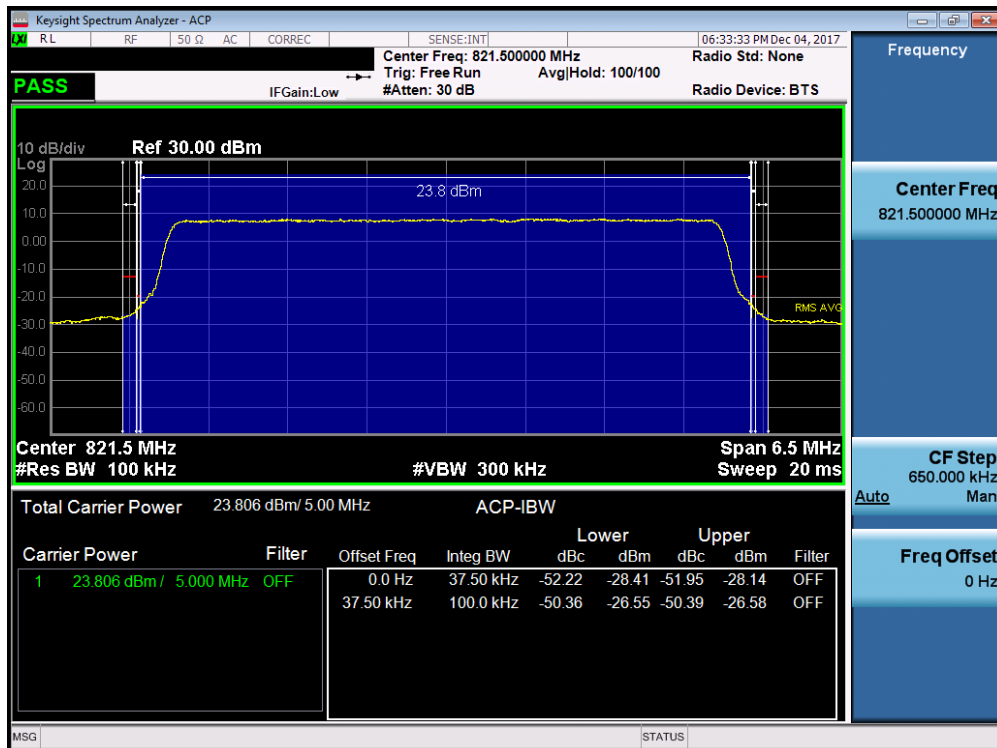


Plot 7-56. Channel Edge Plot (5MHz QPSK – RB Size 25 – High Channel)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 42 of 62

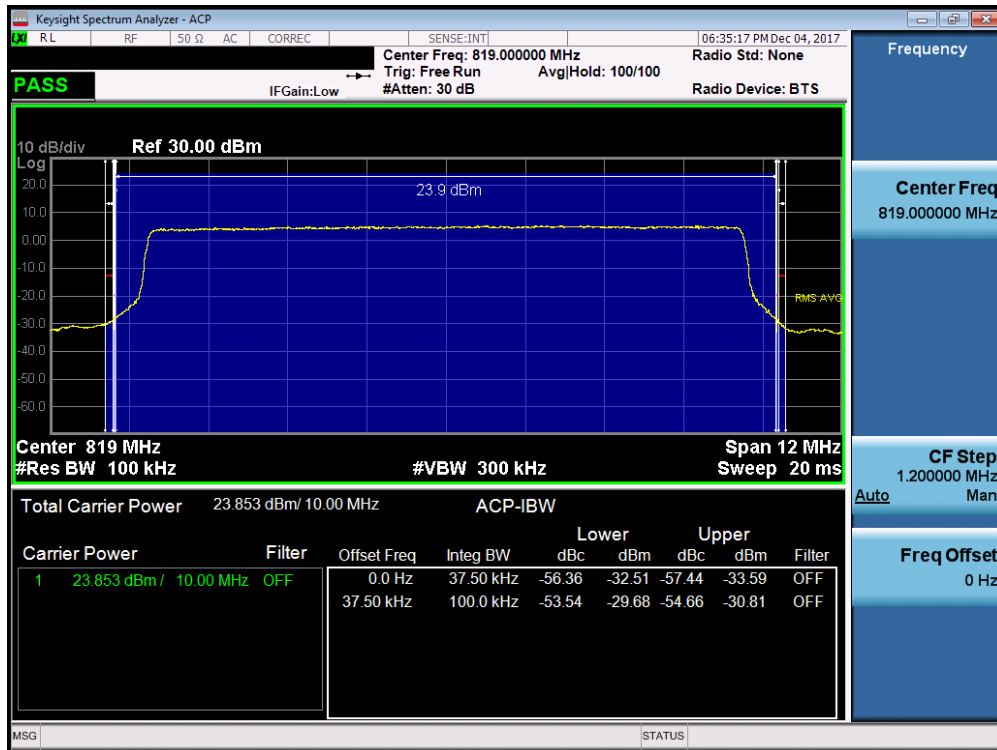

Plot 7-57. Channel Edge Plot (10MHz QPSK – RB Size 50)

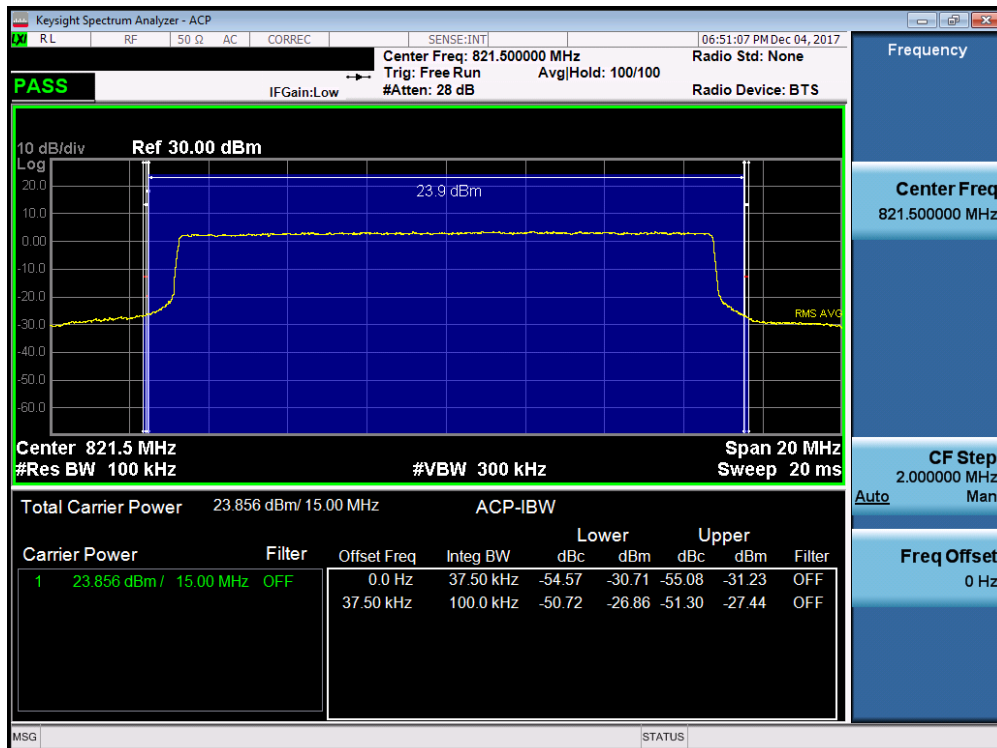

Plot 7-58. Channel Edge Plot (15MHz QPSK – RB Size 75)

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 43 of 62

## 7.5 Conducted Power Output Data

Frequency [MHz]	BC10 [Channel]	Battery Type	Cond. PWR [dBm]	Cond. PWR [Watts]	Margin [dB]
817.90	476	Standard	25.02	0.318	-24.98
823.10	684	Standard	24.95	0.313	-25.05

**Table 7-2. CDMA BC10 Conducted Power Output Data**

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Margin [dB]
793.00	5	QPSK	24.60	0.288	-25.40
793.00	5	16-QAM	23.79	0.239	-26.21
793.00	5	64-QAM	22.79	0.190	-27.21
793.00	10	QPSK	24.57	0.286	-25.43
793.00	10	16-QAM	23.89	0.245	-26.11
793.00	10	64-QAM	22.81	0.191	-27.19

**Table 7-3. LTE Band 14 Conducted Power Output Data**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 44 of 62

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]
814.70	1.4	QPSK	24.13	0.259
823.30	1.4	QPSK	24.16	0.261
814.70	1.4	16-QAM	23.47	0.222
823.30	1.4	16-QAM	23.53	0.225
814.70	1.4	64-QAM	22.38	0.173
823.30	1.4	64-QAM	22.42	0.175
815.50	3	QPSK	24.21	0.264
822.50	3	QPSK	24.27	0.267
815.50	3	16-QAM	23.55	0.226
822.50	3	16-QAM	23.65	0.232
815.50	3	64-QAM	22.47	0.177
822.50	3	64-QAM	22.55	0.180
816.50	5	QPSK	24.21	0.264
821.50	5	QPSK	24.22	0.264
816.50	5	16-QAM	23.56	0.227
821.50	5	16-QAM	23.55	0.226
816.50	5	64-QAM	22.47	0.177
821.50	5	64-QAM	22.49	0.177
819.00	10	QPSK	24.26	0.267
819.00	10	16-QAM	23.46	0.222
819.00	10	64-QAM	22.51	0.178
821.50	15	QPSK	24.25	0.266
821.50	15	16-QAM	23.62	0.230
821.50	15	64-QAM	22.52	0.179

**Table 7-4. LTE Band 26 Conducted Power Output Data**

**NOTES:**

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 45 of 62	

## 7.6 Radiated Power (ERP)

§22.913(a.2) §90.542

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 46 of 62	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

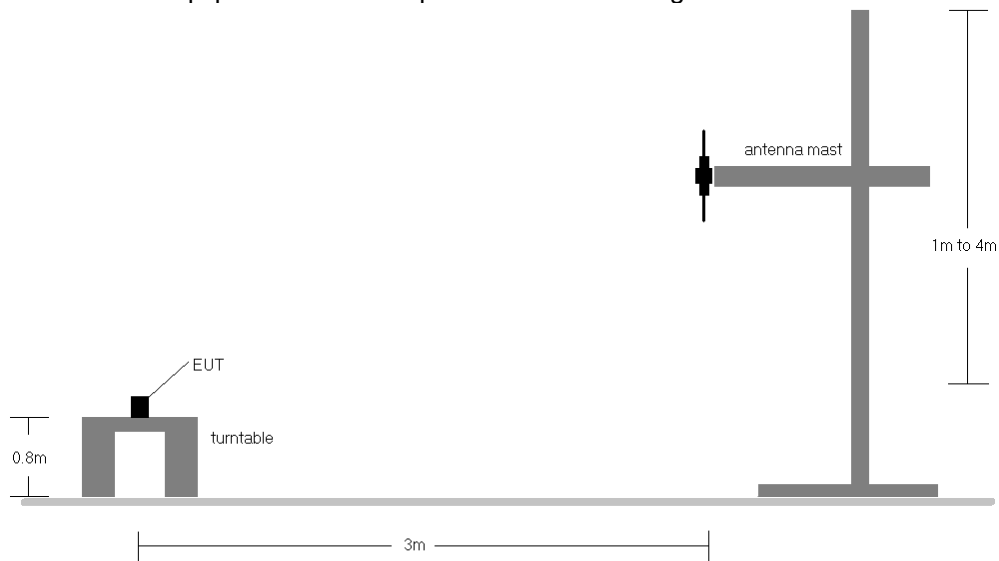

**Figure 7-4. Radiated Test Setup <1GHz**

### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
790.50	5	QPSK	H	150	294	1 / 0	19.26	1.36	18.47	0.070	34.77	-16.30	20.62	0.115	-19.98
793.00	5	QPSK	H	150	260	1 / 0	19.28	1.37	18.50	0.071	34.77	-16.27	20.65	0.116	-19.95
795.50	5	QPSK	H	150	296	1 / 0	19.08	1.38	18.31	0.068	34.77	-16.46	20.46	0.111	-20.14
790.50	5	16-QAM	H	150	294	1 / 0	18.55	1.36	17.76	0.060	34.77	-17.01	19.91	0.098	-20.69
790.50	5	64-QAM	H	150	294	1 / 0	17.67	1.36	16.88	0.049	34.77	-17.89	19.03	0.080	-21.57
793.00	10	QPSK	H	150	288	1 / 0	18.84	1.37	18.06	0.064	34.77	-16.71	20.21	0.105	-20.39
793.00	10	16-QAM	H	150	288	1 / 0	18.25	1.37	17.47	0.056	34.77	-17.30	19.62	0.092	-20.98
793.00	10	64-QAM	H	150	288	1 / 0	16.87	1.37	16.09	0.041	34.77	-18.68	18.24	0.067	-22.36
793.00	5	QPSK	V	150	253	1 / 0	19.08	1.37	18.30	0.068	34.77	-16.47	20.45	0.111	-20.15
793 (WCP)	5	QPSK	H	150	273	1 / 0	15.27	1.37	14.49	0.028	34.77	-20.28	16.64	0.046	-23.96

**Table 7-5. ERP/EIRP Data (Band 14)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 47 of 62

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
821.50	15	QPSK	H	150	90	1 / 74	19.87	1.49	19.21	0.083	38.45	-19.24
821.50	15	16-QAM	H	150	353	1 / 74	17.95	1.49	17.29	0.054	38.45	-21.16
821.50	15	64-QAM	H	150	353	1 / 74	16.72	1.49	16.06	0.040	38.45	-22.39
821.50	15 (WCP)	QPSK	H	150	282	1 / 0	17.53	1.49	16.87	0.049	38.45	-21.58

**Table 7-59. ERP Data (Band 26)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 48 of 62	



## 7.7 Radiated Spurious Emissions Measurements

~~§2.1053 §90.543 §90.691~~

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 49 of 62	

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

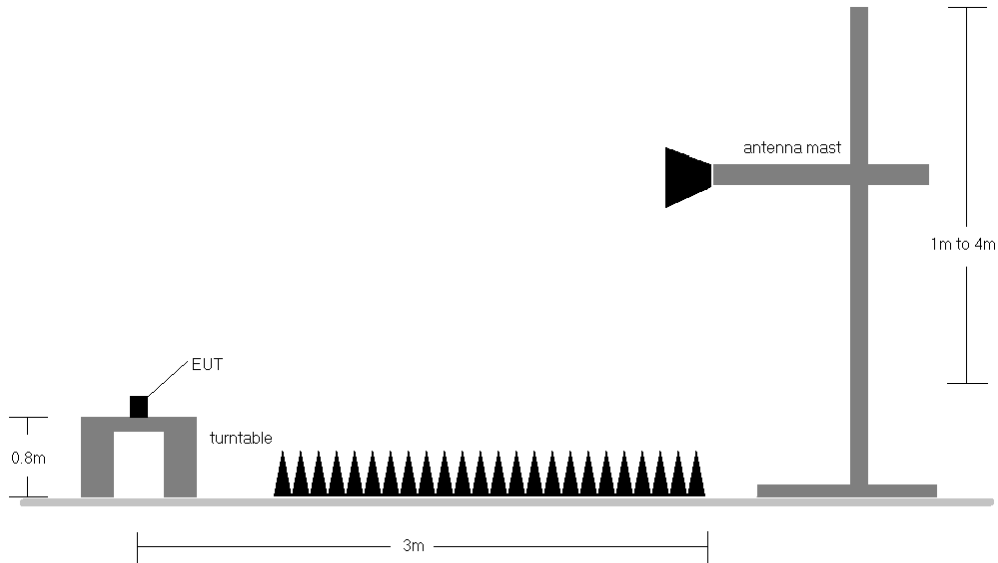

**Figure 7-5. Test Instrument & Measurement Setup**

**Test Notes**

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

<b>FCC ID:</b> A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset	Page 50 of 62

OPERATING FREQUENCY: 817.90 MHz  
 CHANNEL: 476  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	H	170	1	-76.40	8.84	-67.56	-54.6
2453.70	H	-	-	-74.44	9.57	-64.87	-51.9

**Table 7-6. CDMA BC10 Radiated Spurious Data (Ch. 476)**

OPERATING FREQUENCY: 823.10 MHz  
 CHANNEL: 684  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	-	-	-77.08	8.84	-68.23	-55.2
2469.30	H	-	-	-74.91	9.64	-65.27	-52.3

**Table 7-7. CDMA BC10 Radiated Spurious Data (Ch. 684)**

OPERATING FREQUENCY: 817.90 MHz  
 CHANNEL: 476  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	191	175	-77.07	9.00	-68.07	-55.1
2469.30	H	-	-	-72.19	9.12	-63.08	-50.1

**Table 7-8. CDMA BC10 Radiated Spurious Data with WCP (Ch. 476)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 51 of 62	

## Band 14

OPERATING FREQUENCY: 793.00 MHz  
 CHANNEL: 23330  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	H	-	-	-74.07	9.38	-64.69	-51.7
3172.00	H	-	-	-71.15	9.41	-61.74	-48.7

**Table 7-9. Radiated Spurious Data (Band 14 – Mid Channel)**

MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.00 MHz  
 DISTANCE: 3 meters  
 NARROWBAND EMISSION LIMIT: -50 dBm  
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	-	-	-76.68	8.78	-67.90	-27.9

**Table 7-10. Radiated Spurious Data (Band 14 – 1559-1610MHz Band)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 52 of 62	

OPERATING FREQUENCY: 793 (WCP) MHz  
 CHANNEL: 23330  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	H	-	-	-69.35	9.38	-59.97	-47.0
3172.00	H	-	-	-66.05	9.41	-56.64	-43.6
3965.00	H	-	-	-65.89	9.61	-56.28	-43.3

**Table 7-11. Radiated Spurious Data with WCP (Band 14 – Mid Channel)**

MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.00 MHz  
 DISTANCE: 3 meters  
 NARROWBAND EMISSION LIMIT: -50 dBm  
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1586.00	H	-	-	-72.03	8.79	-63.23	-23.2

**Table 7-12. Radiated Spurious Data with WCP (Band 14 – 1559-1610MHz Band)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 53 of 62	

### Band 26

OPERATING FREQUENCY: 815.50 MHz  
 CHANNEL: 26705  
 BANDWIDTH: 3.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1631.00	H	387	193	-74.71	8.84	-65.86	-52.9
2446.50	H	-	-	-74.13	9.53	-64.61	-51.6

**Table 7-13. Radiated Spurious Data (Band 26 – Ch. 26697)**

OPERATING FREQUENCY: 822.50 MHz  
 CHANNEL: 26775  
 BANDWIDTH: 3.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1645.00	H	112	193	-76.45	8.84	-67.61	-54.6
2467.50	H	-	-	-74.89	9.65	-65.24	-52.2

**Table 7-14. Radiated Spurious Data (Band 26 – Ch. 26783)**

OPERATING FREQUENCY: 814.70 MHz  
 CHANNEL: 26697  
 BANDWIDTH: 3.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1645.00	V	-	-	-71.46	8.84	-62.62	-49.6
2467.50	V	-	-	-69.88	9.65	-60.23	-47.2

**Table 7-15. Radiated Spurious Data with WCP (Band 26 – Ch. 26697)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 54 of 62

## 7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.*

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 55 of 62	

**Frequency Stability / Temperature Variation**  
§2.1055, §90.213

OPERATING FREQUENCY: 817,900,000 Hz  
 CHANNEL: 476  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	817,899,847	-153	-0.0000187
100 %		- 30	817,900,174	174	0.0000213
100 %		- 20	817,899,543	-457	-0.0000559
100 %		- 10	817,899,938	-62	-0.0000076
100 %		0	817,899,978	-22	-0.0000027
100 %		+ 10	817,900,010	10	0.0000012
100 %		+ 20	817,900,036	36	0.0000044
100 %		+ 30	817,899,960	-40	-0.0000049
100 %		+ 40	817,899,983	-17	-0.0000021
100 %		+ 50	817,899,946	-54	-0.0000066
BATT. ENDPOINT		3.45	+ 20	817,900,041	41

**Table 7-16. CDMA BC10 Frequency Stability Data (Ch. 670)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 56 of 62	



**Frequency Stability / Temperature Variation**  
§2.1055, §90.213

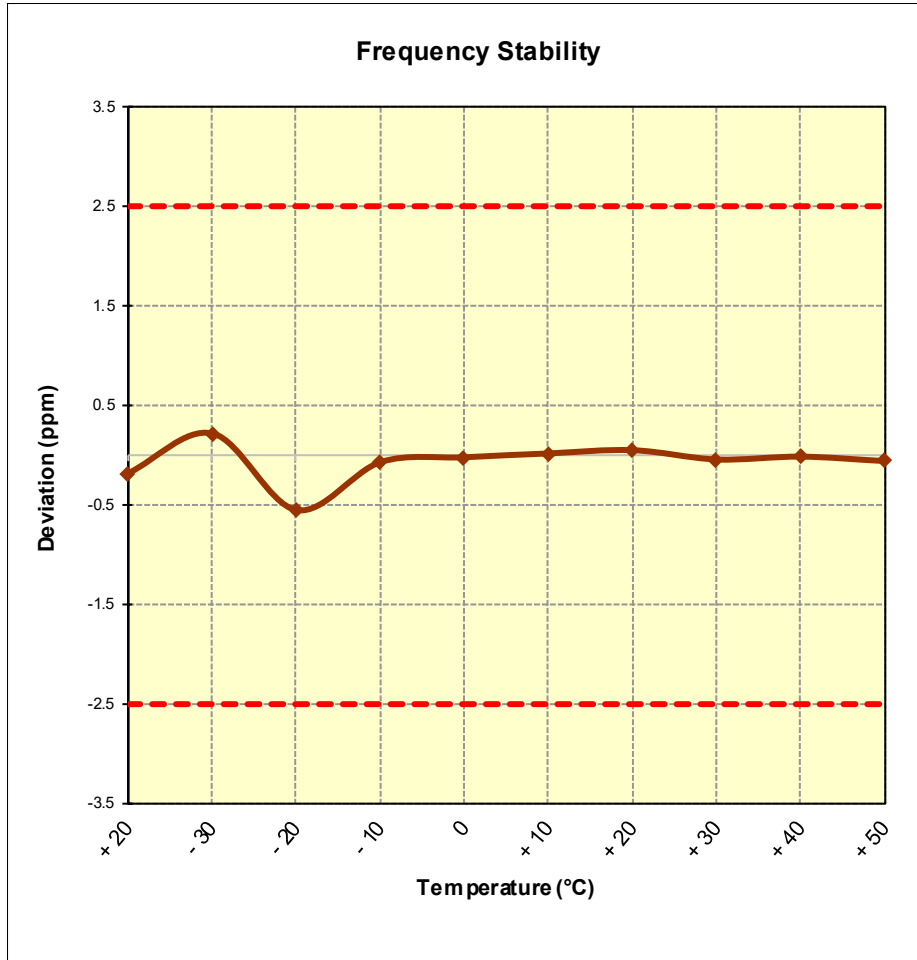

**Figure 7-6. CDMA BC10 Frequency Stability Graph (Ch. 670)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 57 of 62

**Band 14 Frequency Stability Measurements**  
§2.1055 §27.54 RSS-130(4.3)

OPERATING FREQUENCY: 793,000,000 Hz  
 CHANNEL: 23330  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	793,000,144	144	0.0000182
100 %		- 30	792,999,996	-4	-0.0000005
100 %		- 20	792,999,862	-138	-0.0000174
100 %		- 10	792,999,822	-178	-0.0000224
100 %		0	792,999,913	-87	-0.0000110
100 %		+ 10	793,000,266	266	0.0000335
100 %		+ 20	792,999,987	-13	-0.0000016
100 %		+ 30	793,000,070	70	0.0000088
100 %		+ 40	792,999,810	-190	-0.0000240
100 %		+ 50	792,999,932	-68	-0.0000086
BATT. ENDPOINT		3.45	+ 20	792,999,741	-259


**Table 7-17. Frequency Stability Data (Band 14)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 58 of 62	

**Band 14 Frequency Stability Measurements**  
§2.1055 §27.54 RSS-130(4.3)

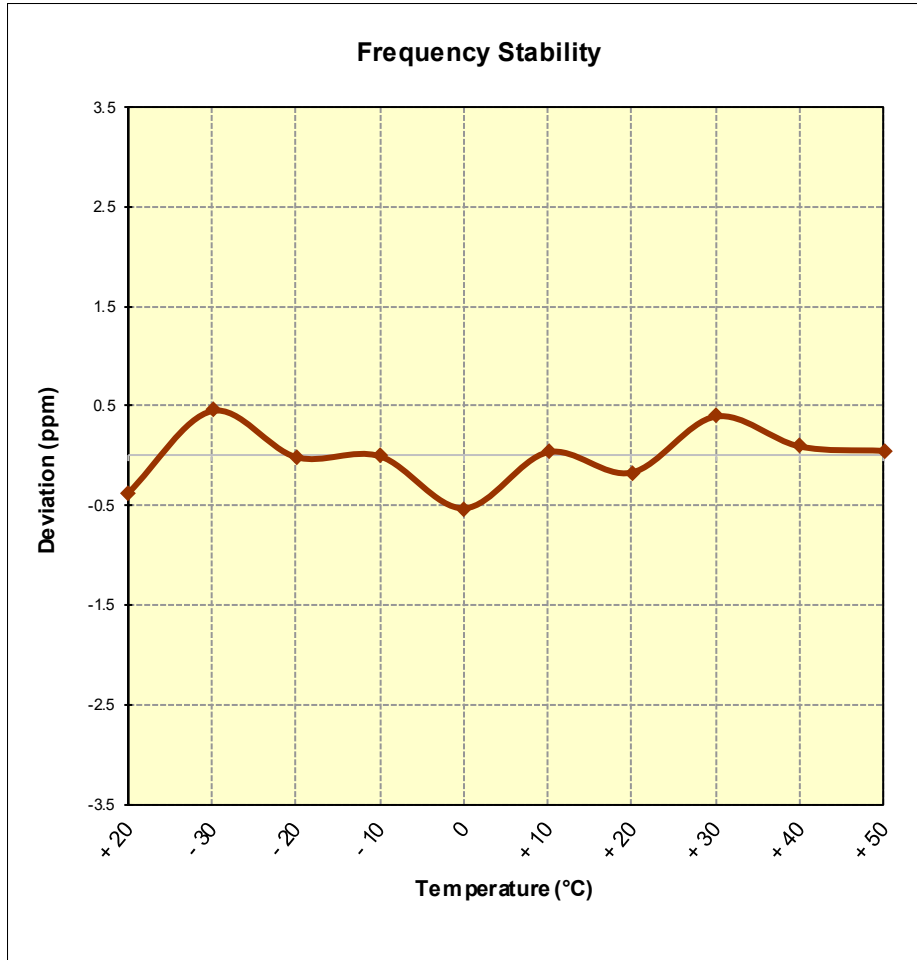

**Figure 7-7. Frequency Stability Graph (Band 14)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset		Page 59 of 62

**Band 26 Frequency Stability / Temperature Variation**  
**§2.1055, §90.213**


OPERATING FREQUENCY: 819,000,000 Hz  
 CHANNEL: 26740  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	818,999,745	-255	-0.0000311
100 %		- 30	819,000,266	266	0.0000325
100 %		- 20	818,999,676	-324	-0.0000396
100 %		- 10	819,000,079	79	0.0000096
100 %		0	818,999,833	-167	-0.0000204
100 %		+ 10	819,000,186	186	0.0000227
100 %		+ 20	818,999,936	-64	-0.0000078
100 %		+ 30	818,999,703	-297	-0.0000363
100 %		+ 40	818,999,867	-133	-0.0000162
100 %		+ 50	818,999,714	-286	-0.0000349
BATT. ENDPOINT		3.45	+ 20	819,000,155	155

**Table 7-18. LTE Band 26 Frequency Stability Data (Ch. 26697)**

FCC ID: A3LSMG965U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1711060289-04-R2.A3L	Test Dates: 11/6-12/14/2017	EUT Type: Portable Handset	Page 60 of 62	

**Band 26 Frequency Stability / Temperature Variation**  
§2.1055, §90.213

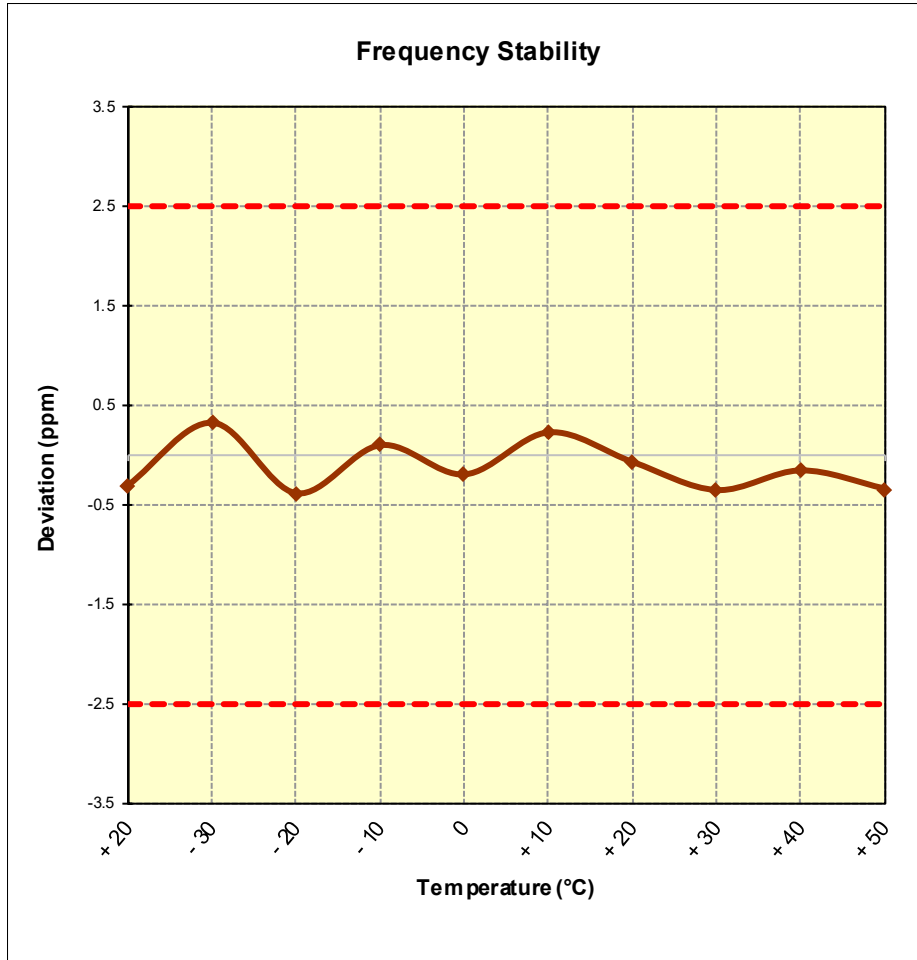

**Table 7-19. LTE Band 26 Frequency Stability Data (Ch. 26697)**

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset	Page 61 of 62	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG965U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: A3LSMG965U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1711060289-04-R2.A3L	<b>Test Dates:</b> 11/6-12/14/2017	<b>EUT Type:</b> Portable Handset		Page 62 of 62