



## SAR EVALUATION REPORT

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do, 16677, Korea

**Date of Testing:**  
 02/01/19 – 03/07/19  
**Test Site/Location:**  
 PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
 1M1901160006-01.A3L

**FCC ID:** A3LSMG977KOR

**APPLICANT:** SAMSUNG ELECTRONICS CO., LTD.

**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** SM-G977N

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phabiet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.15	0.14	0.48	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.17	1.02	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.11	0.17	0.39	0.55
PCE	UMTS 1750	1712.4 - 1752.6 MHz	< 0.1	0.49	0.82	1.94
PCE	UMTS 1900	1852.4 - 1907.6 MHz	< 0.1	0.23	0.53	1.40
PCE	LTE Band 12	699.7 - 715.3 MHz	< 0.1	0.13	0.18	N/A
PCE	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	< 0.1	0.15	0.30	N/A
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.13	0.15	0.34	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.15	0.20	0.43	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	< 0.1	0.25	0.58	2.00
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	< 0.1	0.31	0.97	1.92
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	0.10	0.17	0.71
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.73	< 0.1	0.24	N/A
Nil	U-NII-1	5180 - 5240 MHz	N/A	N/A	N/A	N/A
Nil	U-NII-2A	5260 - 5320 MHz	0.25	0.22	N/A	1.20
Nil	U-NII-2C	5500 - 5720 MHz	0.20	0.25	N/A	1.30
Nil	U-NII-3	5745 - 5825 MHz	0.23	0.23	0.35	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	1.10	< 0.1	< 0.1	N/A
<b>Simultaneous SAR per KDB 690783 D01v01r03:</b>			1.58	1.11	1.58	3.85

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez  
 President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: [sartick@mwfai.info](mailto:sartick@mwfai.info).

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 1 of 114

# TABLE OF CONTENTS

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	15
3	INTRODUCTION .....	16
4	DOSIMETRIC ASSESSMENT .....	17
5	DEFINITION OF REFERENCE POINTS .....	18
6	TEST CONFIGURATION POSITIONS .....	19
7	RF EXPOSURE LIMITS .....	23
8	FCC MEASUREMENT PROCEDURES.....	24
9	RF CONDUCTED POWERS .....	29
10	SYSTEM VERIFICATION.....	68
11	SAR DATA SUMMARY .....	72
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	90
13	SAR MEASUREMENT VARIABILITY .....	106
14	ADDITIONAL TESTING PER FCC GUIDANCE .....	107
15	EQUIPMENT LIST.....	110
16	MEASUREMENT UNCERTAINTIES.....	111
17	CONCLUSION.....	112
18	REFERENCES .....	113
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	
APPENDIX D:	SAR TISSUE SPECIFICATIONS	
APPENDIX E:	SAR SYSTEM VALIDATION	
APPENDIX F:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	
APPENDIX G:	POWER REDUCTION VERIFICATION	
APPENDIX H:	802.11AX RU SAR EXCLUSION	

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 2 of 114	

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
ANT+	Data	2402 - 2480 MHz

## 1.2 Power Reduction for SAR

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under portable hotspot conditions and under some conditions when the device is being used in close proximity to the user's hand. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 3 of 114	

power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

### 1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

#### 1.3.1 Maximum PCE Output Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	<b>34.0</b>	<b>34.0</b>	<b>32.0</b>	<b>30.5</b>	<b>29.5</b>	<b>28.5</b>	<b>26.5</b>	<b>25.0</b>	<b>24.0</b>
	Nominal	<b>33.0</b>	<b>33.0</b>	<b>31.0</b>	<b>29.5</b>	<b>28.5</b>	<b>27.5</b>	<b>25.5</b>	<b>24.0</b>	<b>23.0</b>
GSM/GPRS/EDGE 1900	Maximum	<b>31.0</b>	<b>31.0</b>	<b>28.5</b>	<b>26.5</b>	<b>25.0</b>	<b>26.5</b>	<b>24.5</b>	<b>22.5</b>	<b>21.0</b>
	Nominal	<b>30.0</b>	<b>30.0</b>	<b>27.5</b>	<b>25.5</b>	<b>24.0</b>	<b>25.5</b>	<b>23.5</b>	<b>21.5</b>	<b>20.0</b>

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>
	Nominal	<b>23.0</b>	<b>23.0</b>	<b>23.0</b>
UMTS Band 4 (1750 MHz)	Maximum	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>
	Nominal	<b>23.0</b>	<b>23.0</b>	<b>23.0</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>
	Nominal	<b>23.0</b>	<b>23.0</b>	<b>23.0</b>

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 4 of 114	

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	24.5
	Nominal	23.5
LTE Band 17	Maximum	24.5
	Nominal	23.5
LTE Band 13	Maximum	24.5
	Nominal	23.5
LTE Band 26 (Cell)	Maximum	24.5
	Nominal	23.5
LTE Band 5 (Cell)	Maximum	25.0
	Nominal	24.0
LTE Band 66 (AWS)	Maximum	24.5
	Nominal	23.5
LTE Band 4 (AWS)	Maximum	24.5
	Nominal	23.5
LTE Band 25 (PCS)	Maximum	24.5
	Nominal	23.5
LTE Band 2 (PCS)	Maximum	24.5
	Nominal	23.5
LTE Band 41	Maximum	25.0
	Nominal	24.0

FCC ID: A3LSMG977KOR	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 5 of 114	

### 1.3.2 Reduced PCE Output Power

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	<b>21.0</b>	<b>21.0</b>	<b>21.0</b>
	Nominal	<b>20.0</b>	<b>20.0</b>	<b>20.0</b>
UMTS Band 4 (1750 MHz)	Maximum	<b>21.0</b>	<b>21.0</b>	<b>21.0</b>
	Nominal	<b>20.0</b>	<b>20.0</b>	<b>20.0</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>21.0</b>	<b>21.0</b>	<b>21.0</b>
	Nominal	<b>20.0</b>	<b>20.0</b>	<b>20.0</b>

Note: Power reduction for UMTS Band 5 only applies during proximity sensor operations

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	<b>21.5</b>
	Nominal	<b>20.5</b>
LTE Band 4 (AWS)	Maximum	<b>21.5</b>
	Nominal	<b>20.5</b>
LTE Band 25 (PCS)	Maximum	<b>21.5</b>
	Nominal	<b>20.5</b>
LTE Band 2 (PCS)	Maximum	<b>21.5</b>
	Nominal	<b>20.5</b>
LTE Band 41	Maximum	<b>22.0</b>
	Nominal	<b>21.0</b>

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 6 of 114	

### 1.3.3

## Maximum WLAN and Bluetooth Output Power

Note: Targets for 802.11ax RU operations can be found in Appendix H.

Mode / Band		Modulated Average - Single Tx Chain (dBm)				
		Channel	1	2 - 10	11	12
IEEE 802.11b (2.4 GHz)	Maximum		19.0		8.0	1.5
	Nominal		18.0		7.0	0.5
IEEE 802.11g (2.4 GHz)	Maximum		17.0	14.0	8.0	1.5
	Nominal		16.0	13.0	7.0	0.5
IEEE 802.11n (2.4 GHz)	Maximum	15.5	17.0	14.0	8.0	1.5
	Nominal	14.5	16.0	13.0	7.0	0.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	15.5	17.0	14.0	8.0	1.5
	Nominal	14.5	16.0	13.0	7.0	0.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)						
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth
Channel	36-56, 100-136, 140-165	60	64	38	62	46-54, 102-159	42, 58	106-155
IEEE 802.11a (5 GHz)	Maximum	18.0	16.0	16.5				
	Nominal	17.0	15.0	15.5				
IEEE 802.11n (5 GHz)	Maximum	18.0	15.5	15.5	14.0	15.0	17.0	
	Nominal	17.0	14.5	14.5	13.0	14.0	16.0	
IEEE 802.11ac (5 GHz)	Maximum	18.0	15.5	15.5	14.0	15.0	17.0	15.0
	Nominal	17.0	14.5	14.5	13.0	14.0	16.0	14.0
IEEE 802.11ax SU (5 GHz)	Maximum	18.0	15.5	15.5	14.0	15.0	17.0	15.0
	Nominal	17.0	14.5	14.5	13.0	14.0	16.0	14.0

Mode / Band		Modulated Average - MIMO (dBm)				
		20 MHz Bandwidth				
Channel	1	2 - 10	11	12	13	
IEEE 802.11g (2.4 GHz)	Maximum	20.0	17.0	11.0	4.5	
	Nominal	19.0	16.0	10.0	3.5	
IEEE 802.11n (2.4 GHz)	Maximum	18.5	20.0	17.0	11.0	4.5
	Nominal	17.5	19.0	16.0	10.0	3.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	18.5	20.0	17.0	11.0	4.5
	Nominal	17.5	19.0	16.0	10.0	3.5

Mode / Band		Modulated Average - MIMO (dBm)						
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth
Channel	36-56, 100-136, 140-165	60	64	38	62	46-54, 102-159	42, 58	106-155
IEEE 802.11a (5 GHz)	Maximum	21.0	19.0	19.5				
	Nominal	20.0	18.0	18.5				
IEEE 802.11n (5 GHz)	Maximum	21.0	18.5	18.5	17.0	18.0	20.0	
	Nominal	20.0	17.5	17.5	16.0	17.0	19.0	
IEEE 802.11ac (5 GHz)	Maximum	21.0	18.5	18.5	17.0	18.0	20.0	18.0
	Nominal	20.0	17.5	17.5	16.0	17.0	19.0	17.0
IEEE 802.11ax SU (5 GHz)	Maximum	21.0	18.5	18.5	17.0	18.0	20.0	18.0
	Nominal	20.0	17.5	17.5	16.0	17.0	19.0	17.0

Mode/Band	Modulated Average (dBm)	
Bluetooth	Maximum	16.0
	Nominal	15.0
Bluetooth EDR	Maximum	13.0
	Nominal	12.0
Bluetooth LE 2 Mbps	Maximum	9.5
	Nominal	8.5
Bluetooth LE 1 Mbps, 125/500 Kbps	Maximum	8.5
	Nominal	7.5

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 7 of 114

### 1.3.4 Reduced WLAN Output Power

Note: Targets for 802.11ax RU operations can be found in Appendix H.

Mode / Band		Modulated Average (dBm)				
Channel		1	2 - 10	11	12	13
IEEE 802.11b (2.4 GHz)	Maximum	16.0			8.0	1.5
	Nominal	15.0			7.0	0.5
IEEE 802.11g (2.4 GHz)	Maximum	16.0	14.0	8.0	1.5	
	Nominal	15.0	13.0	7.0	0.5	
IEEE 802.11n (2.4 GHz)	Maximum	15.5	16.0	14.0	8.0	1.5
	Nominal	14.5	15.0	13.0	7.0	0.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	15.5	16.0	14.0	8.0	1.5
	Nominal	14.5	15.0	13.0	7.0	0.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)			
		20 MHz Bandwidth	40 MHz Bandwidth		80 MHz Bandwidth
Channel		36-165	38	46-159	42-155
IEEE 802.11a (5 GHz)	Maximum	15.0			
	Nominal	14.0			
IEEE 802.11n (5 GHz)	Maximum	15.0	14.0	15.0	
	Nominal	14.0	13.0	14.0	
IEEE 802.11ac (5 GHz)	Maximum	15.0	14.0	15.0	15.0
	Nominal	14.0	13.0	14.0	14.0
IEEE 802.11ax SU (5 GHz)	Maximum	15.0	14.0	15.0	15.0
	Nominal	14.0	13.0	14.0	14.0

Mode / Band		Modulated Average - MIMO (dBm)				
		20 MHz Bandwidth				
Channel		1	2 - 10	11	12	13
IEEE 802.11g (2.4 GHz)	Maximum	19.0	17.0	11.0	4.5	
	Nominal	18.0	16.0	10.0	3.5	
IEEE 802.11n (2.4 GHz)	Maximum	18.5	19.0	17.0	11.0	4.5
	Nominal	17.5	18.0	16.0	10.0	3.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	18.5	19.0	17.0	11.0	4.5
	Nominal	17.5	18.0	16.0	10.0	3.5

Mode / Band		Modulated Average - MIMO (dBm)			
		20 MHz Bandwidth	40 MHz Bandwidth		80 MHz Bandwidth
Channel		36-165	38	46-159	42-155
IEEE 802.11a (5 GHz)	Maximum	18.0			
	Nominal	17.0			
IEEE 802.11n (5 GHz)	Maximum	18.0	17.0	18.0	
	Nominal	17.0	16.0	17.0	
IEEE 802.11ac (5 GHz)	Maximum	18.0	17.0	18.0	18.0
	Nominal	17.0	16.0	17.0	17.0
IEEE 802.11ax SU (5 GHz)	Maximum	18.0	17.0	18.0	18.0
	Nominal	17.0	16.0	17.0	17.0

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 8 of 114

### 1.3.5

## Maximum WLAN Output Power During Conditions with Simultaneous 2.4 GHz WLAN and 5 GHz WLAN

Note: Targets for 802.11ax RU operations can be found in Appendix H.

Mode / Band	Channel	Modulated Average - Single Tx Chain (dBm)				
		1	2 - 10	11	12	13
IEEE 802.11b (2.4 GHz)	Maximum	17.0			8.0	1.5
	Nominal	16.0			7.0	0.5
IEEE 802.11g (2.4 GHz)	Maximum	17.0	14.0	8.0	1.5	
	Nominal	16.0	13.0	7.0	0.5	
IEEE 802.11n (2.4 GHz)	Maximum	15.5	17.0	14.0	8.0	1.5
	Nominal	14.5	16.0	13.0	7.0	0.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	15.5	17.0	14.0	8.0	1.5
	Nominal	14.5	16.0	13.0	7.0	0.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	14.0		
	Nominal	13.0		
IEEE 802.11n (5 GHz)	Maximum	14.0	14.0	
	Nominal	13.0	13.0	
IEEE 802.11ac (5 GHz)	Maximum	14.0	14.0	14.0
	Nominal	13.0	13.0	13.0
IEEE 802.11ax SU (5 GHz)	Maximum	14.0	14.0	14.0
	Nominal	13.0	13.0	13.0

Mode / Band	Channel	Modulated Average - MIMO (dBm)				
		20 MHz Bandwidth				
		1	2 - 10	11	12	13
IEEE 802.11g (2.4 GHz)	Maximum	20.0	17.0	11.0	4.5	
	Nominal	19.0	16.0	10.0	3.5	
IEEE 802.11n (2.4 GHz)	Maximum	18.5	20.0	17.0	11.0	4.5
	Nominal	17.5	19.0	16.0	10.0	3.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	18.5	20.0	17.0	11.0	4.5
	Nominal	17.5	19.0	16.0	10.0	3.5

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	17.0		
	Nominal	16.0		
IEEE 802.11n (5 GHz)	Maximum	17.0	17.0	
	Nominal	16.0	16.0	
IEEE 802.11ac (5 GHz)	Maximum	17.0	17.0	17.0
	Nominal	16.0	16.0	16.0
IEEE 802.11ax SU (5 GHz)	Maximum	17.0	17.0	17.0
	Nominal	16.0	16.0	16.0

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 9 of 114

### 1.3.6

## Reduced WLAN Output Power During Conditions with Simultaneous 2.4 GHz WLAN and 5 GHz WLAN

Note: Targets for 802.11ax RU operations can be found in Appendix H.

Mode / Band		Modulated Average (dBm)		
		Channel	1 - 11	12
IEEE 802.11b (2.4 GHz)	Maximum	14.0	8.0	1.5
	Nominal	13.0	7.0	0.5
IEEE 802.11g (2.4 GHz)	Maximum	14.0	8.0	1.5
	Nominal	13.0	7.0	0.5
IEEE 802.11n (2.4 GHz)	Maximum	14.0	8.0	1.5
	Nominal	13.0	7.0	0.5
IEEE 802.11ax SU (2.4 GHz)	Maximum	14.0	8.0	1.5
	Nominal	13.0	7.0	0.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	14.0		
	Nominal	13.0		
IEEE 802.11n (5 GHz)	Maximum	14.0	14.0	
	Nominal	13.0	13.0	
IEEE 802.11ac (5 GHz)	Maximum	14.0	14.0	14.0
	Nominal	13.0	13.0	13.0
IEEE 802.11ax SU (5 GHz)	Maximum	14.0	14.0	14.0
	Nominal	13.0	13.0	13.0

Mode / Band		Modulated Average - MIMO (dBm)			
		20 MHz Bandwidth			
		Channel	1 - 11	12	13
IEEE 802.11g (2.4 GHz)	Maximum	17.0	11.0	4.5	
	Nominal	16.0	10.0	3.5	
IEEE 802.11n (2.4 GHz)	Maximum	17.0	11.0	4.5	
	Nominal	16.0	10.0	3.5	
IEEE 802.11ax SU (2.4 GHz)	Maximum	17.0	11.0	4.5	
	Nominal	16.0	10.0	3.5	

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	17.0		
	Nominal	16.0		
IEEE 802.11n (5 GHz)	Maximum	17.0	17.0	
	Nominal	16.0	16.0	
IEEE 802.11ac (5 GHz)	Maximum	17.0	17.0	17.0
	Nominal	16.0	16.0	16.0
IEEE 802.11ax SU (5 GHz)	Maximum	17.0	17.0	17.0
	Nominal	16.0	16.0	16.0

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 10 of 114

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1  
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
Bluetooth	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C operations are disabled.

## 1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 11 of 114	

## 1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2  
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	GSM voice + 2.4 GHz W-LFI	Yes	Yes	N/A	Yes	
2	GSM voice + 5 GHz W-LFI	Yes	Yes	N/A	Yes	
3	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered
4	GSM voice + 2.4 GHz Bluetooth + 5 GHz W-LFI	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered
5	GSM voice + 2.4 GHz W-LFI MIMO	Yes	Yes	N/A	Yes	
6	GSM voice + 5 GHz W-LFI MIMO	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz W-LFI + 5 GHz W-LFI	Yes	Yes	N/A	Yes	
8	GSM voice + 2.4 GHz W-LFI MIMO + 5 GHz W-LFI MIMO	Yes	Yes	N/A	Yes	
9	GSM voice + 2.4 GHz Bluetooth + 5 GHz W-LFI MIMO	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered
10	UMTS + 2.4 GHz W-LFI	Yes	Yes	Yes	Yes	
11	UMTS + 5 GHz W-LFI	Yes	Yes	Yes	Yes	
12	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
13	UMTS + 2.4 GHz Bluetooth + 5 GHz W-LFI	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
14	UMTS + 2.4 GHz W-LFI MIMO	Yes	Yes	Yes	Yes	
15	UMTS + 5 GHz W-LFI MIMO	Yes	Yes	Yes	Yes	
16	UMTS + 2.4 GHz W-LFI + 5 GHz W-LFI	Yes	Yes	Yes	Yes	
17	UMTS + 2.4 GHz W-LFI MIMO + 5 GHz W-LFI MIMO	Yes	Yes	Yes	Yes	
18	UMTS + 2.4 GHz Bluetooth + 5 GHz W-LFI MIMO	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
19	LTE + 2.4 GHz W-LFI	Yes	Yes	Yes	Yes	
20	LTE + 5 GHz W-LFI	Yes	Yes	Yes	Yes	
21	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
22	LTE + 2.4 GHz Bluetooth + 5 GHz W-LFI	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
23	LTE + 2.4 GHz W-LFI MIMO	Yes	Yes	Yes	Yes	
24	LTE + 5 GHz W-LFI MIMO	Yes	Yes	Yes	Yes	
25	LTE + 2.4 GHz W-LFI + 5 GHz W-LFI	Yes	Yes	Yes	Yes	
26	LTE + 2.4 GHz W-LFI MIMO + 5 GHz W-LFI MIMO	Yes	Yes	Yes	Yes	
27	LTE + 2.4 GHz Bluetooth + 5 GHz W-LFI MIMO	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
28	GPRS/EDGE + 2.4 GHz W-LFI	N/A	N/A	Yes	Yes	
29	GPRS/EDGE + 5 GHz W-LFI	N/A	N/A	Yes	Yes	
30	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes^	Yes	^Bluetooth Tethering is considered
31	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz W-LFI	N/A	N/A	Yes^	Yes	^Bluetooth Tethering is considered
32	GPRS/EDGE + 2.4 GHz W-LFI MIMO	N/A	N/A	Yes	Yes	
33	GPRS/EDGE + 5 GHz W-LFI MIMO	N/A	N/A	Yes	Yes	
34	GPRS/EDGE + 2.4 GHz W-LFI + 5 GHz W-LFI	N/A	N/A	Yes	Yes	
35	GPRS/EDGE + 2.4 GHz W-LFI MIMO + 5 GHz W-LFI MIMO	N/A	N/A	Yes	Yes	
36	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz W-LFI MIMO	N/A	N/A	Yes^	Yes	^Bluetooth Tethering is considered

- 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
- This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 12 of 114

7. This device supports VOLTE.
8. This device supports VoWIFI.
9. This device supports Bluetooth Tethering.

## 1.7 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC Guidance, SAR testing was not required for 802.11ax when applying the initial test configuration procedures of KDB 248227, with 802.11ax considered a higher order 802.11 mode.

This device supports IEEE 802.11ax with the following features:

- a) Up to 80 MHz Bandwidth only for 5 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) No aggregate channel configurations
- d) 2 Tx antenna output
- e) Up to 1024 QAM is supported
- f) TDWR and Band gap channels are supported for 5 GHz
- g) MU-MIMO UL Operations are not supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

Additional phablet SAR was tested due to proximity sensor. Please refer to section 6.9.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 13 of 114	

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

## 1.8 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

## 1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 14 of 114	

# 2

# LTE INFORMATION

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 17: 5 MHz	706.5 (23755)		710 (23790)		713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)		710 (23790)		711 (23800)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 18 (QPSK, 16QAM, 64QAM, 256QAM) UL UE Cat 5 (QPSK, 16QAM, 64QAM)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 15. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 15 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 15 of 114	

## 3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 16 of 114	

# 4 DOSIMETRIC ASSESSMENT

## 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4-1**  
Sample SAR Area Scan

**Table 4-1**  
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\*

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}, \Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22


\*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 17 of 114

# 5 DEFINITION OF REFERENCE POINTS

## 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

## 5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



**Figure 5-2**  
Front, back and side view of SAM Twin Phantom

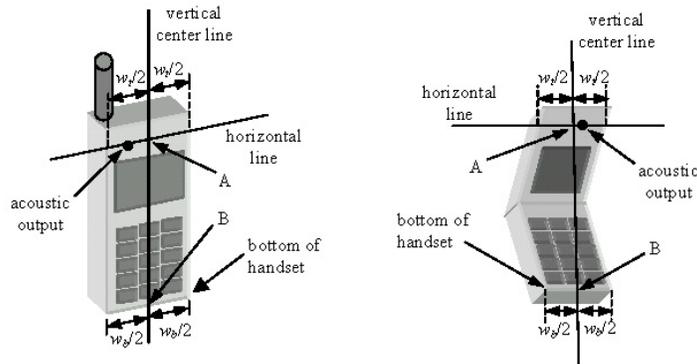

**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 SAMSUNG	Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 18 of 114

## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

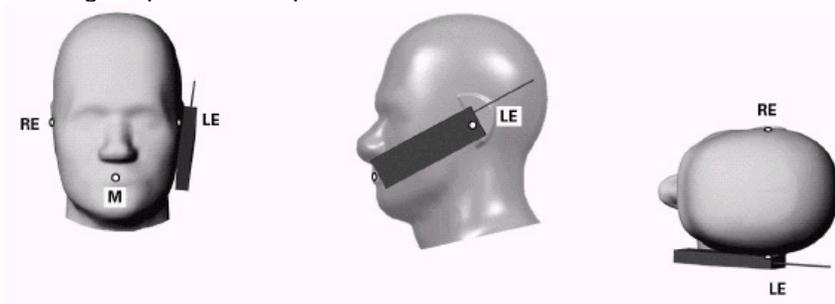


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 19 of 114



contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 21 of 114	

support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR  $> 1.2$  W/kg.

## 6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 22 of 114	

# 7 RF EXPOSURE LIMITS

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1  
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 23 of 114	

## 8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for UMTS

#### 8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 24 of 114

## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

## 8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

## 8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

## 8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 25 of 114

## 8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

## 8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

## 8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

## 8.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

## 8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 26 of 114

programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 27 of 114	

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel. Per FCC Guidance, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 Guidance.

### 8.6.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$  W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 28 of 114 REV 21.2 M 12/05/2018	

# 9 RF CONDUCTED POWERS

## 9.1 GSM Conducted Powers

**Table 9-1  
Maximum Conducted Power**

Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.26	33.83	31.08	29.60	<b>27.72</b>	27.60	25.27	24.02	22.49
	190	33.33	33.67	30.80	29.38	<b>27.54</b>	27.32	25.09	23.38	22.18
	251	33.11	33.36	30.67	29.18	<b>27.50</b>	27.00	24.99	23.35	22.03
GSM 1900	512	30.21	30.46	27.72	<b>25.63</b>	24.08	25.50	23.42	21.95	19.92
	661	30.13	30.34	27.35	<b>25.52</b>	23.92	25.36	23.21	21.65	19.71
	810	29.94	30.19	27.61	<b>25.55</b>	23.91	25.52	23.40	21.71	19.83

Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.23	24.80	25.06	25.34	<b>24.71</b>	18.57	19.25	19.76	19.48
	190	24.30	24.64	24.78	25.12	<b>24.53</b>	18.29	19.07	19.12	19.17
	251	24.08	24.33	24.65	24.92	<b>24.49</b>	17.97	18.97	19.09	19.02
GSM 1900	512	21.18	21.43	21.70	<b>21.37</b>	21.07	16.47	17.40	17.69	16.91
	661	21.10	21.31	21.33	<b>21.26</b>	20.91	16.33	17.19	17.39	16.70
	810	20.91	21.16	21.59	<b>21.29</b>	20.90	16.49	17.38	17.45	16.82


<b>GSM 850</b>	<b>Frame Avg.Targets:</b>	23.97	23.97	24.98	25.24	<b>25.49</b>	18.47	19.48	19.74	19.99
<b>GSM 1900</b>		20.97	20.97	21.48	<b>21.24</b>	20.99	16.47	17.48	17.24	16.99

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 29 of 114 REV 21.2 M 12/05/2018

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 33 (Max 4 Tx uplink slots)**  
**EDGE Multislot class: 33 (Max 4 Tx uplink slots)**  
**DTM Multislot Class: N/A**

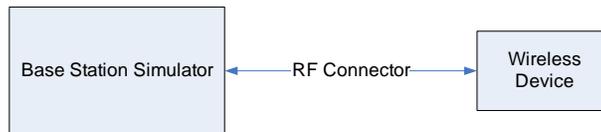

**Figure 9-1**  
**Power Measurement Setup**

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 30 of 114	

## 9.2 UMTS Conducted Powers

**Table 9-2**  
**Maximum Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.42	23.39	23.26	22.92	22.93	22.75	23.54	23.03	23.12	-
99		12.2 kbps AMR	23.37	23.42	23.25	22.93	22.92	22.77	23.53	23.03	23.11	-
6	HSDPA	Subtest 1	22.63	22.61	22.50	22.98	22.96	22.74	23.99	23.40	23.55	0
6		Subtest 2	23.00	22.99	22.90	23.31	23.30	23.07	23.50	22.93	23.03	0
6		Subtest 3	22.60	22.66	22.50	22.32	22.25	22.10	22.93	22.36	22.51	0.5
6		Subtest 4	22.12	22.09	22.00	22.27	22.26	22.04	22.45	21.91	22.08	0.5
6	HSUPA	Subtest 1	22.60	22.63	22.51	22.32	22.27	22.10	22.93	22.39	22.50	0
6		Subtest 2	21.18	21.18	21.07	20.86	20.84	20.66	21.94	21.38	21.53	2
6		Subtest 3	22.68	22.65	22.53	22.32	22.31	22.13	22.99	22.41	22.51	1
6		Subtest 4	21.18	21.19	21.04	21.31	21.31	21.13	21.92	21.37	21.52	2
6		Subtest 5	23.40	23.45	23.33	22.97	22.90	22.70	23.58	23.07	23.21	0

**Table 9-3**  
**Reduced Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	20.55	20.36	20.12	20.05	19.94	19.86	20.37	19.83	19.81	-
99		12.2 kbps AMR	20.54	20.32	20.13	20.09	19.96	19.85	20.35	19.81	19.80	-
6	HSDPA	Subtest 1	19.98	20.00	19.85	19.99	19.78	19.63	20.30	19.46	19.60	0
6		Subtest 2	19.99	19.83	19.81	19.89	19.73	19.84	20.33	19.65	19.68	0
6		Subtest 3	19.22	19.36	19.45	19.83	19.83	19.83	20.26	19.59	19.78	0.5
6		Subtest 4	19.32	19.48	19.43	19.35	19.68	19.80	19.98	19.68	19.65	0.5
6	HSUPA	Subtest 1	19.50	19.33	19.15	19.30	19.24	19.04	19.38	19.04	19.01	0
6		Subtest 2	17.89	17.87	17.96	17.91	17.95	17.79	17.88	17.86	17.97	2
6		Subtest 3	18.98	18.80	18.95	18.85	18.79	18.70	18.77	18.68	18.69	1
6		Subtest 4	17.89	17.90	17.88	17.93	17.78	17.97	17.94	17.78	17.86	2
6		Subtest 5	19.87	19.99	19.87	19.88	19.80	19.72	19.89	19.58	19.60	0

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



**Figure 9-2**  
**Power Measurement Setup**

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 31 of 114	

### 9.3 LTE Conducted Powers

#### 9.3.1

#### LTE Band 12

Table 9-4  
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	<b>23.96</b>	0	0
	1	25	23.89		0
	1	49	23.84		0
	25	0	<b>22.93</b>	0-1	1
	25	12	22.89		1
	25	25	22.90		1
	50	0	22.92		1
16QAM	1	0	23.19	0-1	1
	1	25	23.15		1
	1	49	23.01		1
	25	0	22.00	0-2	2
	25	12	21.96		2
	25	25	21.92		2
	50	0	21.94		2
64QAM	1	0	22.14	0-2	2
	1	25	22.03		2
	1	49	21.95		2
	25	0	20.96	0-3	3
	25	12	20.93		3
	25	25	20.90		3
	50	0	20.93		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 32 of 114

**Table 9-5  
LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.16	23.92	23.68	0	0	
	1	12	24.00	23.76	23.53		0	
	1	24	24.05	23.82	23.58		0	
	16QAM	12	0	23.19	22.96	22.73	0-1	1
		12	6	23.17	22.94	22.72		1
		12	13	23.14	22.90	22.68		1
		25	0	23.11	22.90	22.69		1
64QAM	1	0	23.26	23.16	22.92	0-1	1	
	1	12	23.28	23.04	22.83		1	
	1	24	23.29	23.10	22.85		1	
	16QAM	12	0	22.19	22.02	21.75	0-2	2
		12	6	22.17	21.99	21.70		2
		12	13	22.16	21.93	21.72		2
		25	0	22.12	21.92	21.68		2
64QAM	1	0	22.23	22.09	21.82	0-2	2	
	1	12	22.07	21.86	21.61		2	
	1	24	22.22	21.99	21.82		2	
	16QAM	12	0	21.21	20.99	20.75	0-3	3
		12	6	21.15	20.95	20.72		3
		12	13	21.16	20.93	20.68		3
		25	0	21.12	20.91	20.64		3

**Table 9-6  
LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.11	23.81	23.58	0	0	
	1	7	24.01	23.72	23.49		0	
	1	14	24.10	23.81	23.59		0	
	16QAM	8	0	23.18	22.89	22.65	0-1	1
		8	4	23.21	22.87	22.64		1
		8	7	23.17	22.86	22.63		1
		15	0	23.19	22.90	22.69		1
64QAM	1	0	23.42	23.10	22.91	0-1	1	
	1	7	23.31	23.07	22.78		1	
	1	14	23.32	23.02	22.75		1	
	16QAM	8	0	22.23	21.95	21.70	0-2	2
		8	4	22.23	21.91	21.72		2
		8	7	22.20	21.92	21.71		2
64QAM	15	0	22.17	21.88	21.66	0-2	2	
	1	0	22.32	22.03	21.79		0-2	2
	1	7	22.12	21.89	21.63			2
	16QAM	1	14	22.22	21.95	21.72		0-3
		8	0	21.23	20.95	20.68	3	
		8	4	21.20	20.94	20.66	3	
		8	7	21.19	20.94	20.65	3	
15	0	21.17	20.89	20.63	3			

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 33 of 114

**Table 9-7**  
**LTE Band 12 Conducted Powers -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.14	23.84	23.58	0	0
	1	2	24.13	23.81	23.58		0
	1	5	24.10	23.79	23.52		0
	3	0	24.20	23.92	23.65		0
	3	2	24.11	23.82	23.58		0
	3	3	24.09	23.81	23.63		0
	6	0	23.13	22.86	22.62	0-1	1
16QAM	1	0	23.38	23.07	22.86	0-1	1
	1	2	23.20	22.94	22.63		1
	1	5	23.42	23.12	22.85		1
	3	0	23.20	22.94	22.67		1
	3	2	23.21	22.94	22.68		1
	3	3	23.24	23.00	22.77		1
	6	0	22.19	21.93	21.69	0-2	2
64QAM	1	0	22.24	21.99	21.70	0-2	2
	1	2	22.31	21.96	21.69		2
	1	5	22.29	22.00	21.76		2
	3	0	22.23	21.95	21.74		2
	3	2	22.16	21.90	21.62		2
	3	3	22.19	21.94	21.68		2
	6	0	21.19	21.02	20.69	0-3	3

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 34 of 114

9.3.2

LTE Band 13

Table 9-8  
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.35	0	0
	1	25	23.30		0
	1	49	23.26		0
	25	0	22.39	0-1	1
	25	12	22.35		1
	25	25	22.33		1
	50	0	22.31		1
16QAM	1	0	22.69	0-1	1
	1	25	22.51		1
	1	49	22.61		1
	25	0	21.46	0-2	2
	25	12	21.40		2
	25	25	21.37		2
	50	0	21.32		2
64QAM	1	0	21.58	0-2	2
	1	25	21.47		2
	1	49	21.48		2
	25	0	20.44	0-3	3
	25	12	20.39		3
	25	25	20.36		3
	50	0	20.33		3

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 35 of 114

**Table 9-9  
LTE Band 13 Conducted Powers - 5 MHz Bandwidth**

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.37	0	0
	1	12	23.21		0
	1	24	23.27		0
	12	0	22.36	0-1	1
	12	6	22.34		1
	12	13	22.33		1
	25	0	22.31		1
16QAM	1	0	22.69	0-1	1
	1	12	22.57		1
	1	24	22.51		1
	12	0	21.45	0-2	2
	12	6	21.40		2
	12	13	21.37		2
	25	0	21.36		2
64QAM	1	0	21.55	0-2	2
	1	12	21.32		2
	1	24	21.45		2
	12	0	20.46	0-3	3
	12	6	20.40		3
	12	13	20.38		3
	25	0	20.36		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 36 of 114

9.3.3

LTE Band 26 (Cell)

Table 9-10  
 LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.07	0	0
	1	36	23.94		0
	1	74	23.78		0
	36	0	23.11	0-1	1
	36	18	22.97		1
	36	37	22.88		1
	75	0	22.95		1
16QAM	1	0	23.25	0-1	1
	1	36	23.18		1
	1	74	22.99		1
	36	0	22.03	0-2	2
	36	18	21.96		2
	36	37	21.92		2
	75	0	21.96		2
64QAM	1	0	22.26	0-2	2
	1	36	22.13		2
	1	74	22.17		2
	36	0	21.05	0-3	3
	36	18	20.95		3
	36	37	20.91		3
	75	0	20.94		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 37 of 114

**Table 9-11**  
**LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth**

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.07	24.06	23.71	0	0
	1	25	24.02	23.97	23.63		0
	1	49	23.95	23.93	23.51		0
	25	0	23.08	23.02	22.73	0-1	1
	25	12	23.07	23.04	22.69		1
	25	25	23.03	22.99	22.65		1
16QAM	1	0	23.28	23.33	22.75	0-1	1
	1	25	23.13	23.15	22.70		1
	1	49	23.10	23.05	22.65		1
	25	0	22.08	22.15	21.71	0-2	2
	25	12	22.03	22.03	21.73		2
	25	25	22.03	21.98	21.70		2
64QAM	1	0	22.23	22.35	21.84	0-2	2
	1	25	22.06	22.15	21.75		2
	1	49	22.19	21.96	21.64		2
	25	0	21.12	21.10	20.70	0-3	3
	25	12	21.04	21.08	20.72		3
	25	25	21.05	21.03	20.72		3
	50	0	21.04	20.99	20.64		3

**Table 9-12**  
**LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.95	24.18	23.56	0	0
	1	12	23.75	24.05	23.44		0
	1	24	23.82	23.95	23.44		0
	12	0	22.99	23.05	22.61	0-1	1
	12	6	22.95	23.00	22.57		1
	12	13	22.92	23.00	22.51		1
16QAM	25	0	22.94	23.01	22.56		1
	1	0	23.05	23.18	22.66	0-1	1
	1	12	22.93	23.02	22.58		1
	1	24	22.98	23.01	22.54		1
	12	0	22.04	22.10	21.65	0-2	2
	12	6	21.96	22.02	21.57		2
12	13	21.94	22.00	21.57	2		
64QAM	25	0	21.96	22.03	21.54		2
	1	0	22.27	22.21	21.71	0-2	2
	1	12	21.93	22.02	21.61		2
	1	24	22.14	22.13	21.64		2
	12	0	21.05	21.16	20.65	0-3	3
	12	6	21.07	21.06	20.59		3
12	13	20.98	21.07	20.58	3		
	25	0	20.98	21.03	20.53		3

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 38 of 114

**Table 9-13**  
**LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.89	23.96	23.49	0	0
	1	7	23.80	23.82	23.37		0
	1	14	23.84	23.90	23.48		0
	8	0	22.95	23.02	22.55	0-1	1
	8	4	22.98	23.00	22.52		1
	8	7	22.94	23.00	22.50		1
16QAM	15	0	22.95	22.98	22.50	0-1	1
	1	0	23.10	23.12	22.72		1
	1	7	23.01	23.04	22.53		1
	1	14	23.07	23.14	22.63	0-2	1
	8	0	22.03	22.05	21.56		2
	8	4	21.96	22.08	21.56		2
64QAM	8	7	21.97	22.04	21.58	0-2	2
	15	0	21.95	22.05	21.58		2
	1	0	22.09	22.17	21.73		0-3
	1	7	22.00	21.95	21.53	2	
	1	14	21.98	22.05	21.62	2	
	8	0	21.04	21.09	20.67	0-3	3
8	4	20.98	21.05	20.54	3		
8	7	20.97	21.03	20.52	3		
	15	0	20.96	21.03	20.56		3

**Table 9-14**  
**LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 26 (Cell) 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.86	23.96	23.48	0	0	
	1	2	23.86	23.90	23.46		0	
	1	5	23.83	23.91	23.43		0	
	3	0	23.92	24.02	23.57	0-1	0	
	3	2	23.87	23.95	23.47		0	
	3	3	23.93	23.95	23.50		0	
16QAM	6	0	22.86	22.95	22.50	0-1	1	
	1	0	23.00	23.11	22.68		0-1	1
	1	2	23.01	23.06	22.55			1
	1	5	23.04	23.13	22.63	0-2		1
	3	0	22.99	23.07	22.54		1	
	3	2	23.01	23.03	22.51		1	
64QAM	3	3	23.03	23.14	22.62	0-2	1	
	6	0	22.01	22.17	21.57		0-2	2
	1	0	22.09	22.22	21.68			0-2
	1	2	22.06	22.19	21.67	2		
	1	5	22.11	22.16	21.61	0-3	2	
	3	0	22.03	22.11	21.60		2	
3	2	21.98	22.09	21.64	2			
	3	3	22.01	22.16	21.58		2	
	6	0	21.03	21.09	20.60		3	

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 39 of 114

9.3.4

LTE Band 5 (Cell)

Table 9-15  
 LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.71	0	0
	1	25	23.66		0
	1	49	23.61		0
	25	0	22.72	0-1	1
	25	12	22.67		1
	25	25	22.68		1
	50	0	22.69		1
16QAM	1	0	23.02	0-1	1
	1	25	22.88		1
	1	49	22.92		1
	25	0	21.72	0-2	2
	25	12	21.70		2
	25	25	21.68		2
	50	0	21.69		2
64QAM	1	0	21.87	0-2	2
	1	25	21.80		2
	1	49	21.74		2
	25	0	20.72	0-3	3
	25	12	20.66		3
	25	25	20.66		3
	50	0	20.70		3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 40 of 114

**Table 9-16**  
**LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.19	23.72	23.92	0	0
	1	12	24.03	23.52	23.75		0
	1	24	24.13	23.61	23.83		0
	12	0	23.23	22.73	22.96	0-1	1
	12	6	23.25	22.71	22.95		1
	12	13	23.21	22.68	22.93		1
16QAM	25	0	23.21	22.69	22.91	0-1	1
	1	0	23.43	22.95	23.19		1
	1	12	23.34	22.85	23.16		1
	1	24	23.40	22.89	23.15	0-2	1
	12	0	22.25	21.75	21.98		2
	12	6	22.27	21.72	21.95		2
64QAM	12	13	22.25	21.73	21.97	0-2	2
	25	0	22.20	21.70	21.95		2
	1	0	22.41	21.84	22.10		0-2
	1	12	22.24	21.78	22.03	2	
	1	24	22.30	21.83	22.04	0-3	
	12	0	21.27	20.76	20.99		3
12	6	21.23	20.74	21.01	3		
64QAM	12	13	21.25	20.73	20.95	0-3	3
	25	0	21.23	20.70	20.92		3

**Table 9-17**  
**LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.13	23.62	23.88	0	0
	1	7	24.04	23.49	23.76		0
	1	14	24.14	23.56	23.81		0
	8	0	23.19	22.67	22.94	0-1	1
	8	4	23.21	22.70	22.92		1
	8	7	23.19	22.64	22.89		1
16QAM	15	0	23.21	22.67	22.94	0-1	1
	1	0	23.41	22.89	23.18		1
	1	7	23.38	22.87	23.15		1
	1	14	23.39	22.86	23.10	0-2	1
	8	0	22.25	21.81	21.96		2
	8	4	22.23	21.69	21.94		2
64QAM	8	7	22.22	21.71	21.95	0-2	2
	15	0	22.19	21.69	21.93		2
	1	0	22.37	21.91	22.17		0-2
	1	7	22.30	21.71	22.00	2	
	1	14	22.25	21.81	22.03	0-3	
	8	0	21.27	20.70	20.96		3
8	4	21.23	20.68	20.92	3		
64QAM	8	7	21.21	20.70	20.96	0-3	3
	15	0	21.19	20.66	20.95		3

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 41 of 114	

**Table 9-18**  
**LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.13	23.63	23.88	0	0
	1	2	24.11	23.61	23.84		0
	1	5	24.09	23.55	23.81		0
	3	0	24.18	23.73	23.92		0
	3	2	24.11	23.64	23.84		0
	3	3	24.15	23.62	23.87		0
	6	0	23.11	22.68	22.87	0-1	1
16QAM	1	0	23.38	22.87	23.09	0-1	1
	1	2	23.25	22.73	23.03		1
	1	5	23.41	22.96	23.13		1
	3	0	23.21	22.71	22.93		1
	3	2	23.25	22.75	22.98		1
	3	3	23.30	22.83	23.08		1
	6	0	22.23	21.76	21.94	0-2	2
64QAM	1	0	22.31	21.84	22.01	0-2	2
	1	2	22.20	21.77	21.94		2
	1	5	22.31	21.78	22.01		2
	3	0	22.27	21.79	22.03		2
	3	2	22.26	21.73	21.99		2
	3	3	22.28	21.81	22.05		2
	6	0	21.22	20.74	20.98	0-3	3

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 42 of 114	

9.3.5

LTE Band 66 (AWS)

Table 9-19  
 LTE Band 66 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.15	23.00	23.15	0	0
	1	50	23.10	22.91	23.07		0
	1	99	<b>23.20</b>	22.83	22.89		0
	50	0	22.15	22.02	22.15	0-1	1
	50	25	22.15	21.91	22.02		1
	50	50	<b>22.16</b>	21.86	21.93		1
100	0	22.15	21.96	22.05	1		
16QAM	1	0	22.25	22.25	22.47	0-1	1
	1	50	22.22	22.08	22.13		1
	1	99	22.27	21.94	22.01		1
	50	0	21.15	20.99	21.13	0-2	2
	50	25	21.11	20.97	21.07		2
	50	50	21.13	20.86	20.97		2
100	0	21.11	20.93	21.03	2		
64QAM	1	0	21.35	21.30	21.44	0-2	2
	1	50	21.22	21.21	21.33		2
	1	99	21.27	21.06	21.12		2
	50	0	20.10	20.01	20.14	0-3	3
	50	25	20.11	19.91	20.02		3
	50	50	20.10	19.86	19.94		3
100	0	20.10	19.93	20.05	3		

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 43 of 114

**Table 9-20**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.95	22.88	22.93	0	0
	1	36	22.90	22.68	22.76		0
	1	74	22.74	22.57	22.52		0
	36	0	22.00	21.95	21.86	0-1	1
	36	18	22.03	21.75	21.75		1
	36	37	22.00	21.65	21.64		1
	75	0	21.98	21.75	21.75		1
16QAM	1	0	22.10	22.23	22.12	0-1	1
	1	36	22.25	22.01	22.00		1
	1	74	22.12	21.81	21.48		1
	36	0	21.07	20.85	21.03	0-2	2
	36	18	20.96	20.75	20.74		2
	36	37	20.88	20.57	20.62		2
	75	0	20.93	20.75	20.71		2
64QAM	1	0	21.27	20.90	21.15	0-2	2
	1	36	21.10	21.02	20.92		2
	1	74	20.83	20.83	20.76		2
	36	0	20.04	19.89	19.84	0-3	3
	36	18	19.95	19.74	19.73		3
	36	37	19.97	19.66	19.62		3
	75	0	19.95	19.71	19.69		3

**Table 9-21**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.94	22.77	22.98	0	0
	1	25	22.96	22.66	22.74		0
	1	49	22.88	22.53	22.65		0
	25	0	21.95	21.76	21.98	0-1	1
	25	12	21.93	21.70	21.74		1
	25	25	21.91	21.68	21.66		1
	50	0	21.96	21.77	21.82		1
16QAM	1	0	22.13	22.08	22.02	0-1	1
	1	25	21.96	21.87	21.81		1
	1	49	22.04	21.68	21.81		1
	25	0	20.98	20.79	20.85	0-2	2
	25	12	20.95	20.71	20.83		2
	25	25	20.90	20.65	20.75		2
	50	0	20.93	20.73	20.80		2
64QAM	1	0	21.10	21.03	21.21	0-2	2
	1	25	21.16	20.92	20.89		2
	1	49	20.88	20.75	20.83		2
	25	0	19.96	19.77	19.85	0-3	3
	25	12	19.93	19.75	19.75		3
	25	25	19.89	19.66	19.66		3
	50	0	19.91	19.73	19.82		3

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 44 of 114	

**Table 9-22**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.92	22.75	22.79	0	0
	1	12	22.78	22.59	22.58		0
	1	24	22.82	22.62	22.63		0
	12	0	21.90	21.83	21.80	0-1	1
	12	6	21.94	21.75	21.76		1
	12	13	21.92	21.71	21.75		1
	25	0	21.89	21.71	21.73		1
16QAM	1	0	22.03	21.88	21.99	0-1	1
	1	12	22.09	21.83	21.90		1
	1	24	22.06	21.76	21.87		1
	12	0	20.99	20.79	20.83	0-2	2
	12	6	20.96	20.78	20.74		2
	12	13	20.98	20.71	20.72		2
	25	0	20.88	20.71	20.77		2
64QAM	1	0	21.04	20.96	20.93	0-2	2
	1	12	20.93	20.80	20.81		2
	1	24	21.00	20.85	20.92		2
	12	0	19.99	19.79	19.84	0-3	3
	12	6	19.96	19.76	19.79		3
	12	13	19.99	19.74	19.80		3
	25	0	19.91	19.72	19.78		3

**Table 9-23**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.84	22.66	22.69	0	0
	1	7	22.75	22.53	22.60		0
	1	14	22.84	22.61	22.69		0
	8	0	21.93	21.70	21.78	0-1	1
	8	4	21.94	21.67	21.74		1
	8	7	21.91	21.70	21.74		1
	15	0	21.89	21.73	21.78		1
16QAM	1	0	22.04	21.82	21.92	0-1	1
	1	7	21.98	21.75	21.82		1
	1	14	21.94	21.72	21.82		1
	8	0	20.95	20.72	20.78	0-2	2
	8	4	20.93	20.69	20.77		2
	8	7	20.87	20.68	20.76		2
	15	0	20.89	20.69	20.74		2
64QAM	1	0	21.06	20.83	20.95	0-2	2
	1	7	20.95	20.68	20.84		2
	1	14	20.99	20.80	20.83		2
	8	0	19.97	19.72	19.84	0-3	3
	8	4	19.88	19.70	19.75		3
	8	7	19.90	19.73	19.76		3
	15	0	19.91	19.70	19.76		3

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 45 of 114	

**Table 9-24**  
**LTE Band 66 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.85	22.63	22.65	0	0
	1	2	22.84	22.66	22.66		0
	1	5	22.82	22.61	22.68		0
	3	0	22.90	22.70	22.70		0
	3	2	22.86	22.61	22.69		0
	3	3	22.88	22.67	22.65		0
	6	0	21.80	21.68	21.66		0-1
16QAM	1	0	22.05	21.79	21.82	0-1	1
	1	2	21.87	21.68	21.72		1
	1	5	22.10	21.79	21.73		1
	3	0	21.96	21.74	21.69		1
	3	2	21.87	21.63	21.67		1
	3	3	21.91	21.70	21.71		1
	6	0	20.93	20.72	20.71	0-2	2
64QAM	1	0	20.99	20.77	20.69	0-2	2
	1	2	20.91	20.78	20.74		2
	1	5	20.98	20.78	20.73		2
	3	0	20.93	20.74	20.72		2
	3	2	20.91	20.72	20.74		2
	3	3	20.97	20.74	20.79		2
	6	0	20.02	19.68	19.75	0-3	3

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 46 of 114

**Table 9-25**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.31	20.17	20.32	0	0
	1	50	20.12	20.11	20.19		0
	1	99	20.25	19.86	19.97		0
	50	0	20.26	20.15	20.27	0-1	0
	50	25	20.14	20.10	20.08		0
	50	50	20.13	20.00	20.03		0
	100	0	20.10	20.01	20.12		0
16QAM	1	0	20.61	20.36	20.25	0-1	0
	1	50	20.45	20.17	20.02		0
	1	99	20.51	20.09	19.90		0
	50	0	20.23	20.20	20.15	0-2	0
	50	25	20.12	20.12	20.10		0
	50	50	20.22	20.07	19.96		0
	100	0	20.23	20.04	20.09		0
64QAM	1	0	20.48	20.37	20.49	0-2	0
	1	50	20.24	20.13	20.27		0
	1	99	20.38	20.01	20.12		0
	50	0	20.17	20.06	20.26	0-3	0
	50	25	20.16	20.02	20.15		0
	50	50	20.15	19.92	20.03		0
	100	0	20.14	19.99	20.13		0

**Table 9-26**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.03	19.97	20.19	0	0
	1	36	19.92	19.81	20.00		0
	1	74	20.01	19.75	19.85		0
	36	0	20.04	19.90	20.16	0-1	0
	36	18	20.02	19.88	20.05		0
	36	37	20.02	19.80	19.99		0
	75	0	20.02	19.88	20.03		0
16QAM	1	0	20.37	20.26	20.45	0-1	0
	1	36	20.07	20.02	20.23		0
	1	74	20.15	19.98	20.12		0
	36	0	20.08	19.95	20.15	0-2	0
	36	18	20.04	19.88	20.05		0
	36	37	19.98	19.81	20.01		0
	75	0	20.02	19.87	20.08		0
64QAM	1	0	20.31	20.12	20.35	0-2	0
	1	36	20.11	20.02	20.15		0
	1	74	20.24	19.91	20.17		0
	36	0	20.03	20.02	20.10	0-3	0
	36	18	20.02	19.88	20.05		0
	36	37	19.99	19.83	20.01		0
	75	0	19.96	19.80	20.02		0

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 47 of 114	

**Table 9-27**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.98	20.07	20.09	0	0
	1	25	19.97	19.89	19.99		0
	1	49	20.03	19.90	19.87		0
	25	0	20.04	19.93	20.03	0-1	0
	25	12	19.95	19.88	19.97		0
	25	25	20.01	19.85	19.97		0
	50	0	20.09	19.86	19.99	0	
16QAM	1	0	20.35	20.18	20.37	0-1	0
	1	25	20.21	20.03	20.17		0
	1	49	20.13	20.00	20.01		0
	25	0	20.05	19.92	20.05	0-2	0
	25	12	20.02	19.89	20.03		0
	25	25	20.02	19.85	19.97		0
	50	0	19.98	19.89	19.91	0	
64QAM	1	0	20.31	20.07	20.25	0-2	0
	1	25	20.09	19.79	20.06		0
	1	49	20.21	19.86	20.00		0
	25	0	20.09	19.93	20.07	0-3	0
	25	12	20.01	19.85	19.99		0
	25	25	20.03	19.85	19.95		0
	50	0	20.01	19.88	19.98	0	

**Table 9-28**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.94	19.86	20.13	0	0
	1	12	19.80	19.71	20.01		0
	1	24	19.87	19.72	20.07		0
	12	0	19.96	19.91	20.21	0-1	0
	12	6	19.96	19.86	20.18		0
	12	13	19.94	19.83	20.15		0
	25	0	19.94	19.82	20.16	0	
16QAM	1	0	20.27	20.21	20.37	0-1	0
	1	12	20.13	20.07	20.32		0
	1	24	20.12	19.95	20.19		0
	12	0	20.03	19.91	20.22	0-2	0
	12	6	20.01	19.84	20.21		0
	12	13	20.00	19.89	20.19		0
	25	0	19.92	19.85	20.11	0	
64QAM	1	0	20.09	19.98	20.24	0-2	0
	1	12	20.02	19.90	20.19		0
	1	24	20.11	19.90	20.14		0
	12	0	19.98	19.94	20.31	0-3	0
	12	6	19.97	19.86	20.19		0
	12	13	20.00	19.90	20.18		0
	25	0	19.96	19.83	20.17	0	

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 48 of 114

**Table 9-29**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.92	19.77	20.09	0	0
	1	7	19.77	19.72	19.99		0
	1	14	19.85	19.73	20.02		0
	8	0	19.92	19.84	20.17	0-1	0
	8	4	19.97	19.86	20.10		0
	8	7	19.92	19.80	20.11		0
	15	0	19.95	19.81	20.15		0
16QAM	1	0	20.21	20.08	20.30	0-1	0
	1	7	20.15	19.94	20.26		0
	1	14	20.12	19.91	20.28		0
	8	0	19.96	19.88	20.09	0-2	0
	8	4	19.93	19.84	20.17		0
	8	7	19.93	19.91	20.18		0
	15	0	20.01	19.88	20.19		0
64QAM	1	0	20.11	19.97	20.26	0-2	0
	1	7	19.96	19.86	20.11		0
	1	14	20.03	19.85	20.22		0
	8	0	20.00	19.84	20.18	0-3	0
	8	4	19.96	19.81	20.16		0
	8	7	19.95	19.84	20.16		0
	15	0	19.97	19.80	20.16		0

**Table 9-30**  
**LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.92	19.88	19.94	0	0
	1	2	19.89	19.76	19.84		0
	1	5	19.85	19.74	19.81		0
	3	0	19.91	19.82	19.90	0-1	0
	3	2	19.89	19.73	19.84		0
	3	3	19.90	19.73	19.82		0
	6	0	19.91	19.78	19.85		0
16QAM	1	0	20.24	19.99	19.91	0-1	0
	1	2	20.14	19.88	19.85		0
	1	5	20.11	20.02	19.93		0
	3	0	19.96	19.82	19.88	0-2	0
	3	2	20.02	19.88	20.01		0
	3	3	20.02	19.91	19.91		0
	6	0	20.00	19.84	19.83		0
64QAM	1	0	20.09	19.98	20.10	0-2	0
	1	2	20.01	19.90	19.95		0
	1	5	20.10	20.20	19.99		0
	3	0	20.07	19.93	19.86	0-3	0
	3	2	20.24	19.90	19.91		0
	3	3	20.06	20.10	19.96		0
	6	0	20.04	20.04	19.89		0

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 49 of 114	

9.3.6

LTE Band 25 (PCS)

Table 9-31  
 LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.32	23.05	23.23	0	0
	1	50	23.42	22.96	23.12		0
	1	99	23.29	22.93	23.06		0
	50	0	22.32	22.06	22.19	0-1	1
	50	25	22.31	22.02	22.11		1
	50	50	22.27	21.98	22.06		1
16QAM	100	0	22.31	22.01	22.07	0-1	1
	1	0	22.50	22.37	22.42		1
	1	50	22.48	22.22	22.28		1
	1	99	22.45	22.14	22.18	0-2	1
	50	0	21.36	21.09	21.18		2
	50	25	21.36	21.04	21.11		2
64QAM	50	50	21.29	20.98	21.10	0-2	2
	100	0	21.42	21.01	21.08		2
	1	0	21.50	21.30	21.45		0-3
	1	50	21.49	21.15	21.31	2	
	1	99	21.49	21.19	21.29	2	
	50	0	20.29	20.09	20.18	0-3	3
50	25	20.29	20.00	20.12	3		
50	50	20.28	19.98	20.10	3		
100	0	20.32	20.01	20.07		3	

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 50 of 114

**Table 9-32**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.37	23.04	23.14	0	0
	1	36	23.34	23.05	23.20		0
	1	74	23.25	22.89	23.03		0
	36	0	22.37	22.04	22.15	0-1	1
	36	18	22.41	22.05	22.16		1
	36	37	22.42	21.98	22.04		1
	75	0	22.35	21.93	22.12		1
16QAM	1	0	22.61	22.26	22.35	0-1	1
	1	36	22.89	22.44	22.37		1
	1	74	22.45	21.98	22.38		1
	36	0	21.27	21.17	21.18	0-2	2
	36	18	21.59	21.11	21.15		2
	36	37	21.40	20.98	21.11		2
	75	0	21.27	20.93	21.09		2
64QAM	1	0	21.57	21.26	21.31	0-2	2
	1	36	21.95	21.13	21.17		2
	1	74	21.40	21.04	21.22		2
	36	0	20.38	20.07	20.20	0-3	3
	36	18	20.47	20.03	20.18		3
	36	37	20.42	19.98	20.17		3
	75	0	20.40	19.97	20.13		3

**Table 9-33**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.40	23.03	23.05	0	0
	1	25	23.40	23.00	23.13		0
	1	49	23.44	22.91	22.90		0
	25	0	22.43	22.05	22.15	0-1	1
	25	12	22.46	21.99	22.06		1
	25	25	22.49	21.97	22.02		1
	50	0	22.38	22.04	22.07		1
16QAM	1	0	22.71	22.26	22.15	0-1	1
	1	25	22.72	22.14	22.24		1
	1	49	22.78	22.15	21.64		1
	25	0	21.46	21.05	21.19	0-2	2
	25	12	21.45	20.98	21.13		2
	25	25	21.51	20.90	21.10		2
	50	0	21.33	20.99	21.08		2
64QAM	1	0	21.51	21.12	21.17	0-2	2
	1	25	21.64	21.04	21.19		2
	1	49	21.41	20.92	21.10		2
	25	0	20.44	20.03	20.18	0-3	3
	25	12	20.48	19.98	20.10		3
	25	25	20.56	20.00	20.04		3
	50	0	20.42	19.94	20.02		3

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 51 of 114	

**Table 9-34**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.40	22.93	23.38	0	0
	1	12	23.49	22.86	23.24		0
	1	24	23.32	22.87	23.35		0
	12	0	22.59	22.00	22.39	0-1	1
	12	6	22.40	21.98	22.46		1
	12	13	22.50	21.96	22.43		1
	25	0	22.37	21.65	22.38		1
16QAM	1	0	22.50	22.15	22.61	0-1	1
	1	12	22.54	22.13	22.70		1
	1	24	22.50	22.12	22.55		1
	12	0	21.40	21.02	21.38	0-2	2
	12	6	21.56	21.02	21.43		2
	12	13	21.46	20.97	21.46		2
	25	0	21.38	20.95	21.39		2
64QAM	1	0	21.65	21.10	21.45	0-2	2
	1	12	21.62	21.06	21.53		2
	1	24	21.55	21.07	21.57		2
	12	0	20.36	20.04	20.49	0-3	3
	12	6	20.45	19.99	20.45		3
	12	13	20.42	19.98	20.50		3
	25	0	20.35	19.95	20.35		3

**Table 9-35**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.51	22.98	23.01	0	0
	1	7	23.39	22.94	22.96		0
	1	14	23.48	22.95	23.01		0
	8	0	22.55	22.04	22.12	0-1	1
	8	4	22.55	22.06	22.05		1
	8	7	22.55	22.07	22.08		1
	15	0	22.53	22.06	22.11		1
16QAM	1	0	22.78	22.21	22.24	0-1	1
	1	7	22.64	22.24	22.25		1
	1	14	22.55	22.18	22.17		1
	8	0	21.55	21.06	21.13	0-2	2
	8	4	21.58	21.25	21.09		2
	8	7	21.50	21.01	21.04		2
	15	0	21.54	21.05	21.08		2
64QAM	1	0	21.61	21.20	21.22	0-2	2
	1	7	21.61	21.05	21.06		2
	1	14	21.66	21.11	21.27		2
	8	0	20.54	20.07	20.08	0-3	3
	8	4	20.63	20.08	20.07		3
	8	7	20.55	20.07	20.07		3
	15	0	20.51	20.08	20.12		3

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 52 of 114	

**Table 9-36**  
**LTE Band 25 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.45	23.02	23.05	0	0
	1	2	23.46	23.00	23.14		0
	1	5	23.47	22.95	22.99		0
	3	0	23.53	23.04	23.07		0
	3	2	23.46	22.89	22.96		0
	3	3	23.46	22.93	23.07		0
16QAM	6	0	22.53	21.98	22.15	0-1	1
	1	0	22.71	22.29	22.27	0-1	1
	1	2	22.57	22.05	22.10		1
	1	5	22.68	22.25	22.21		1
	3	0	22.53	22.04	22.15		1
	3	2	22.62	22.07	22.08		1
3	3	22.67	22.11	22.14	1		
64QAM	6	0	21.54	21.11	21.12	0-2	2
	1	0	21.63	21.06	21.12	0-2	2
	1	2	21.55	21.08	21.11		2
	1	5	21.62	21.11	21.09		2
	3	0	21.55	21.05	21.17		2
	3	2	21.55	21.03	21.06		2
3	3	21.52	21.13	21.19	2		
	6	0	20.52	20.07	20.23	0-3	3

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 53 of 114	

**Table 9-37**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.60	20.31	20.32	0	0
	1	50	20.41	20.11	20.39		0
	1	99	20.33	20.12	20.33		0
	50	0	20.54	20.18	20.31	0-1	0
	50	25	20.34	20.14	20.11		0
	50	50	20.34	20.13	20.13		0
	100	0	20.48	20.17	20.29		0
16QAM	1	0	20.46	20.40	20.43	0-1	0
	1	50	20.56	20.23	20.41		0
	1	99	20.40	20.26	20.48		0
	50	0	20.34	20.18	20.38	0-2	0
	50	25	20.41	20.13	20.27		0
	50	50	20.35	20.09	20.24		0
	100	0	20.39	20.15	20.21		0
64QAM	1	0	20.81	20.24	20.50	0-2	0
	1	50	20.75	20.34	20.22		0
	1	99	20.48	20.35	20.49		0
	50	0	20.47	20.24	20.38	0-3	0
	50	25	20.37	20.13	20.29		0
	50	50	20.32	20.10	20.30		0
	100	0	20.43	20.10	20.22		0

**Table 9-38**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.65	20.34	20.36	0	0
	1	36	20.49	20.09	20.25		0
	1	74	20.54	20.10	20.26		0
	36	0	20.61	20.26	20.36	0-1	0
	36	18	20.58	20.24	20.32		0
	36	37	20.57	20.19	20.31		0
	75	0	20.64	20.23	20.31		0
16QAM	1	0	20.82	20.51	20.62	0-1	0
	1	36	20.80	20.33	20.56		0
	1	74	20.76	20.38	20.66		0
	36	0	20.60	20.27	20.52	0-2	0
	36	18	20.51	20.20	20.32		0
	36	37	20.59	20.17	20.37		0
	75	0	20.61	20.20	20.33		0
64QAM	1	0	20.77	20.47	20.42	0-2	0
	1	36	20.69	20.35	20.40		0
	1	74	20.79	20.21	20.55		0
	36	0	20.36	19.90	20.11	0-3	0
	36	18	20.10	19.82	19.97		0
	36	37	20.08	19.78	19.92		0
	75	0	20.10	19.71	19.92		0

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 54 of 114

**Table 9-39**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.62	20.25	20.34	0	0
	1	25	20.77	20.20	20.34		0
	1	49	20.59	20.15	20.20		0
	25	0	20.66	20.25	20.37	0-1	0
	25	12	20.61	20.27	20.32		0
	25	25	20.63	20.21	20.32		0
	50	0	20.59	20.21	20.29		0
16QAM	1	0	20.85	20.53	20.60	0-1	0
	1	25	20.84	20.44	20.53		0
	1	49	20.68	20.35	20.53		0
	25	0	20.62	20.30	20.39	0-2	0
	25	12	20.66	20.26	20.35		0
	25	25	20.67	20.24	20.35		0
	50	0	20.63	20.24	20.31		0
64QAM	1	0	20.88	20.50	20.54	0-2	0
	1	25	20.88	20.42	20.45		0
	1	49	20.84	20.37	20.38		0
	25	0	20.14	19.89	20.13	0-3	0
	25	12	20.12	19.80	19.94		0
	25	25	20.15	19.73	19.96		0
	50	0	20.13	19.74	19.86		0

**Table 9-40**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.66	20.16	20.24	0	0
	1	12	20.49	20.08	20.03		0
	1	24	20.56	20.10	20.14		0
	12	0	20.66	20.21	20.23	0-1	0
	12	6	20.67	20.21	20.24		0
	12	13	20.65	20.18	20.27		0
	25	0	20.61	20.17	20.24		0
16QAM	1	0	20.77	20.41	20.42	0-1	0
	1	12	20.85	20.29	20.37		0
	1	24	20.78	20.39	20.50		0
	12	0	20.71	20.24	20.36	0-2	0
	12	6	20.71	20.23	20.32		0
	12	13	20.71	20.25	20.31		0
	25	0	20.62	20.20	20.28		0
64QAM	1	0	20.79	20.27	20.39	0-2	0
	1	12	20.70	20.29	20.38		0
	1	24	20.82	20.37	20.25		0
	12	0	20.16	20.24	19.99	0-3	0
	12	6	20.19	20.29	19.90		0
	12	13	20.18	20.19	19.94		0
	25	0	20.10	20.21	19.86		0

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 55 of 114

**Table 9-41**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.59	20.15	20.18	0	0
	1	7	20.51	20.08	20.06		0
	1	14	20.58	20.15	20.25		0
	8	0	20.65	20.21	20.30	0-1	0
	8	4	20.64	20.25	20.25		0
	8	7	20.64	20.19	20.28		0
	15	0	20.67	20.19	20.28		0
16QAM	1	0	20.85	20.26	20.46	0-1	0
	1	7	20.77	20.29	20.31		0
	1	14	20.78	20.23	20.34		0
	8	0	20.67	20.18	20.26	0-2	0
	8	4	20.66	20.14	20.25		0
	8	7	20.66	20.24	20.32		0
	15	0	20.67	20.22	20.26		0
64QAM	1	0	20.73	20.44	20.45	0-2	0
	1	7	20.81	20.38	20.41		0
	1	14	20.79	20.32	20.41		0
	8	0	20.13	19.95	20.00	0-3	0
	8	4	20.22	19.80	20.02		0
	8	7	20.18	19.78	19.99		0
	15	0	20.19	19.74	19.98		0

**Table 9-42**  
**LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.61	20.15	20.22	0	0
	1	2	20.63	20.14	20.11		0
	1	5	20.56	20.11	20.07		0
	3	0	20.65	20.21	20.25	0-1	0
	3	2	20.55	20.14	20.21		0
	3	3	20.57	20.12	20.25		0
	6	0	20.62	20.17	20.24		0
16QAM	1	0	20.70	20.34	20.34	0-1	0
	1	2	20.57	20.12	20.16		0
	1	5	20.80	20.29	20.40		0
	3	0	20.65	20.25	20.29	0-2	0
	3	2	20.72	20.32	20.29		0
	3	3	20.70	20.31	20.36		0
	6	0	20.62	20.23	20.26		0
64QAM	1	0	20.67	20.26	20.27	0-2	0
	1	2	20.71	20.22	20.21		0
	1	5	20.74	20.19	20.27		0
	3	0	20.65	20.14	20.30	0-3	0
	3	2	20.61	20.16	20.19		0
	3	3	20.69	20.24	20.36		0
	6	0	20.14	19.73	19.84		0

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 56 of 114

9.3.7

LTE Band 41

**Table 9-43**  
**LTE Band 41 Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.61	24.59	23.71	23.43	24.65	0	0
	1	50	24.44	24.38	23.48	23.23	24.47		0
	1	99	24.45	24.41	23.50	23.28	24.48		0
	50	0	23.62	23.60	22.68	22.40	23.69	0-1	1
	50	25	23.58	23.54	22.60	22.35	23.65		1
	50	50	23.56	23.51	22.53	22.33	23.64		1
16QAM	100	0	23.55	23.52	22.56	22.32	23.61	0-1	1
	1	0	23.56	23.55	22.72	22.50	23.82		1
	1	50	23.43	23.28	22.53	22.34	23.67		1
	1	99	23.45	23.43	22.46	22.31	23.70	0-2	1
	50	0	22.60	22.53	21.61	21.35	22.66		2
	50	25	22.55	22.49	21.54	21.30	22.60		2
64QAM	50	50	22.53	22.47	21.50	21.30	22.59	0-2	2
	100	0	22.55	22.49	21.56	21.29	22.61		2
	1	0	22.65	22.64	21.67	21.42	22.51		2
	1	50	22.41	22.40	21.51	21.25	22.35	0-3	2
	1	99	22.43	22.47	21.45	21.31	22.39		2
	50	0	21.65	21.58	20.68	20.42	21.70		3
64QAM	50	25	21.61	21.53	20.60	20.37	21.67	0-3	3
	50	50	21.58	21.50	20.55	20.36	21.66		3
	100	0	21.56	21.49	20.55	20.31	21.61		3

**Table 9-44**  
**LTE Band 41 Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.64	24.63	23.76	23.60	24.78	0	0
	1	36	24.65	24.47	23.72	23.44	24.68		0
	1	74	24.62	24.40	23.70	23.25	24.70		0
	36	0	23.64	23.61	22.76	22.59	23.79	0-1	1
	36	18	23.63	23.56	22.65	22.51	23.74		1
	36	37	23.62	23.53	22.64	22.48	23.69		1
16QAM	75	0	23.64	23.59	22.76	22.53	23.80	0-1	1
	1	0	23.71	23.55	22.74	22.64	23.65		1
	1	36	23.58	23.29	22.60	22.39	23.36		1
	1	74	23.43	23.06	22.65	22.37	23.57	0-2	1
	36	0	22.66	22.57	21.78	21.61	22.78		2
	36	18	22.64	22.54	21.75	21.56	22.73		2
64QAM	36	37	22.63	22.53	21.74	21.51	22.71	0-2	2
	75	0	22.59	22.55	21.76	21.54	22.76		2
	1	0	22.70	22.63	21.94	21.64	22.87		2
	1	36	22.61	22.48	21.83	21.52	22.72	0-3	2
	1	74	22.68	22.42	21.79	21.45	22.73		2
	36	0	21.67	21.66	20.79	20.60	21.79		3
64QAM	36	18	21.65	21.55	20.75	20.62	21.73	0-3	3
	36	37	21.60	21.49	20.70	20.49	21.69		3
	75	0	21.62	21.56	20.79	20.51	21.70		3

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 57 of 114	

**Table 9-45**  
**LTE Band 41 Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.64	24.62	23.77	23.58	24.77	0	0
	1	25	24.53	24.53	23.65	23.41	24.53		0
	1	49	24.56	24.46	23.69	23.32	24.59		0
	25	0	23.62	23.55	22.78	22.54	23.76	0-1	1
	25	12	23.61	23.54	22.75	22.51	23.73		1
	25	25	23.58	23.65	22.73	22.49	23.72		1
50	0	23.61	23.57	22.84	22.59	23.82	1		
16QAM	1	0	23.64	23.60	22.73	22.64	23.82	0-1	1
	1	25	23.61	23.56	22.60	22.56	23.78		1
	1	49	23.20	23.58	22.63	22.49	23.81		1
	25	0	22.65	22.54	21.80	21.55	22.77	0-2	2
	25	12	22.64	22.54	21.76	21.53	22.68		2
	25	25	22.65	22.56	21.73	21.52	22.72		2
50	0	22.68	22.57	21.79	21.56	22.78	2		
64QAM	1	0	22.69	22.61	21.79	21.44	22.73	0-2	2
	1	25	22.73	22.44	21.78	21.45	22.52		2
	1	49	22.64	22.52	21.75	21.42	22.50		2
	25	0	21.58	21.51	20.71	20.57	21.76	0-3	3
	25	12	21.55	21.43	20.67	20.45	21.72		3
	25	25	21.52	21.46	20.68	20.44	21.66		3
50	0	21.72	21.61	20.82	20.60	21.77	3		

**Table 9-46**  
**LTE Band 41 Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.56	24.51	23.73	23.49	24.72	0	0
	1	12	24.61	24.54	23.72	23.37	24.69		0
	1	24	24.62	24.52	23.73	23.45	24.70		0
	12	0	23.63	23.55	22.77	22.53	23.73	0-1	1
	12	6	23.58	23.53	22.75	22.50	23.72		1
	12	13	23.59	23.52	22.74	22.49	23.71		1
25	0	23.64	23.55	22.76	22.52	23.71	1		
16QAM	1	0	23.49	23.47	22.68	22.67	23.67	0-1	1
	1	12	23.54	23.40	22.60	22.57	23.57		1
	1	24	23.57	23.47	22.67	22.57	23.74		1
	12	0	22.66	22.59	21.81	21.67	22.85	0-2	2
	12	6	22.65	22.53	21.74	21.57	22.75		2
	12	13	22.62	22.54	21.79	21.55	22.77		2
25	0	22.65	22.52	21.45	21.57	22.68	2		
64QAM	1	0	22.57	22.42	21.71	21.50	22.60	0-2	2
	1	12	22.47	22.37	21.66	21.42	22.42		2
	1	24	22.54	22.43	21.83	21.42	22.54		2
	12	0	21.64	21.59	20.82	20.53	21.74	0-3	3
	12	6	21.62	21.51	20.78	20.50	21.70		3
	12	13	21.62	21.48	20.79	20.42	21.76		3
25	0	21.58	21.37	20.71	20.45	21.65	3		

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 58 of 114	

**Table 9-47**  
**LTE Band 41 Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.78	21.76	20.88	20.59	21.88	0	0
	1	50	21.54	21.57	20.66	20.54	21.68		0
	1	99	21.54	21.67	20.72	20.58	21.69		0
	50	0	21.62	21.76	20.88	20.58	21.85	0-1	0
	50	25	21.62	21.74	20.74	20.52	21.66		0
	50	50	21.64	21.65	20.69	20.53	21.74		0
100	0	21.59	21.66	20.70	20.57	21.69	0		
16QAM	1	0	21.83	21.85	20.81	20.86	22.00	0-1	0
	1	50	21.61	21.46	20.72	20.44	21.98		0
	1	99	21.59	21.50	20.92	20.57	21.88		0
	50	0	21.68	21.74	20.75	20.61	21.68	0-2	0
	50	25	21.66	21.62	20.69	20.52	21.79		0
	50	50	21.59	21.65	20.68	20.60	21.75		0
100	0	21.64	21.71	20.72	20.58	21.55	0		
64QAM	1	0	21.31	21.38	20.87	20.58	21.46	0-2	0
	1	50	21.54	21.44	20.44	20.42	21.69		0
	1	99	21.46	21.37	20.49	20.34	21.82		0
	50	0	21.76	21.80	20.32	20.21	21.88	0-3	0
	50	25	21.71	21.78	20.23	20.16	21.77		0
	50	50	21.66	21.75	20.13	20.06	21.79		0
100	0	21.53	21.61	20.12	20.03	21.73	0		

**Table 9-48**  
**LTE Band 41 Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.71	21.67	20.75	20.57	21.93	0	0
	1	36	21.56	21.64	20.61	20.53	21.88		0
	1	74	21.52	21.63	20.59	20.54	21.84		0
	36	0	21.66	21.16	20.71	20.60	21.89	0-1	0
	36	18	21.61	21.11	20.66	20.47	21.85		0
	36	37	21.47	21.12	20.59	20.50	21.81		0
75	0	21.62	21.12	20.68	20.62	21.85	0		
16QAM	1	0	21.65	21.60	20.71	20.55	21.84	0-1	0
	1	36	21.38	21.61	20.55	20.52	21.82		0
	1	74	21.45	21.60	20.54	20.54	21.84		0
	36	0	21.69	21.66	20.71	20.55	21.90	0-2	0
	36	18	21.59	21.61	20.66	20.53	21.87		0
	36	37	21.52	21.61	20.62	20.50	21.84		0
75	0	21.59	21.64	20.65	20.49	21.83	0		
64QAM	1	0	21.73	21.68	20.76	20.45	21.93	0-2	0
	1	36	21.54	21.63	20.58	20.47	21.90		0
	1	74	21.52	21.57	20.62	20.52	21.89		0
	36	0	21.29	21.17	20.21	20.07	21.41	0-3	0
	36	18	21.08	21.12	20.16	20.02	21.38		0
	36	37	21.01	21.11	20.05	20.01	21.37		0
75	0	21.10	21.13	20.15	20.05	21.34	0		

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 59 of 114	

**Table 9-49**  
**LTE Band 41 Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.67	21.62	20.74	20.51	21.86	0	0
	1	25	21.49	21.47	20.55	20.37	21.71		0
	1	49	21.45	21.53	20.56	20.44	21.74		0
	25	0	21.61	21.62	20.68	20.47	21.83	0-1	0
	25	12	21.55	21.59	20.64	20.45	21.81		0
	25	25	21.52	21.58	20.60	20.47	21.78		0
16QAM	50	0	21.64	21.69	20.72	20.55	21.88	0-1	0
	1	0	21.67	21.51	20.70	20.52	21.93		0
	1	25	21.45	21.50	20.65	20.49	21.88		0
	25	0	21.63	21.61	20.72	20.51	21.86	0-2	0
	25	12	21.59	21.58	20.67	20.46	21.84		0
	25	25	21.54	21.54	20.64	20.48	21.82		0
64QAM	50	0	21.66	21.66	20.72	20.55	21.89	0-2	0
	1	0	21.79	21.60	20.77	20.50	21.85		0
	1	25	21.75	21.59	20.68	20.54	21.92		0
	25	0	21.64	21.62	20.69	20.53	21.84	0-3	0
	25	12	21.03	21.02	20.11	19.93	21.30		0
	25	25	21.00	21.03	20.08	19.94	21.27		0
	50	0	21.18	21.23	20.26	20.09	21.42		0

**Table 9-50**  
**LTE Band 41 Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.58	21.56	20.74	20.45	21.79	0	0
	1	12	21.60	21.60	20.73	20.48	21.82		0
	1	24	21.56	21.59	20.70	20.49	21.80		0
	12	0	21.62	21.61	20.74	20.50	21.84	0-1	0
	12	6	21.60	21.60	20.70	20.49	21.82		0
	12	13	21.58	21.59	20.69	20.49	21.81		0
16QAM	25	0	21.61	21.64	20.69	20.49	21.83	0-1	0
	1	0	21.65	21.56	20.70	20.54	21.84		0
	1	12	21.55	21.52	20.72	20.49	21.82		0
	12	0	21.69	21.65	20.75	20.56	21.90	0-2	0
	12	6	21.66	21.63	20.73	20.57	21.87		0
	12	13	21.65	21.63	20.72	20.59	21.88		0
64QAM	25	0	21.62	21.59	20.71	20.54	21.84	0-2	0
	1	0	21.65	21.57	20.67	20.55	21.91		0
	1	12	21.55	21.54	20.63	20.46	21.92		0
	12	0	21.18	21.14	20.29	20.06	21.42	0-3	0
	12	6	21.14	21.10	20.25	20.04	21.42		0
	12	13	21.12	21.10	20.23	20.05	21.40		0
	25	0	21.06	21.07	20.15	19.96	21.30		0

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 60 of 114

## 9.4 WLAN Conducted Powers

**Table 9-51  
2.4 GHz WLAN Maximum Average RF Power – Ant 1**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax SU
		Average	Average	Average	Average
2412	1	18.52	16.90	15.23	14.98
2437	6	<b>18.79</b>	16.69	16.71	16.92
2462	11	18.62	13.92	13.90	13.66

**Table 9-52  
2.4 GHz WLAN Maximum Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax SU
		Average	Average	Average	Average
2412	1	18.61	16.96	14.76	14.97
2437	6	<b>18.99</b>	16.99	16.94	16.80
2462	11	18.98	13.73	13.65	13.92

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 61 of 114

**Table 9-53**  
**5 GHz WLAN Maximum Average RF Power – Ant 1**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	17.54	17.51	17.57
5200	40	17.53	17.56	17.60
5220	44	17.64	17.51	17.57
5240	48	17.73	17.71	17.61
5260	52	17.78	17.74	17.72
5280	56	<b>17.82</b>	17.79	17.77
5300	60	15.76	15.27	15.16
5320	64	16.12	15.23	15.23
5500	100	17.77	17.69	17.77
5600	120	<b>17.78</b>	17.72	17.84
5620	124	17.77	17.80	17.71
5720	144	17.62	17.62	17.61
5745	149	<b>17.63</b>	17.59	17.65
5785	157	17.56	17.53	17.58
5825	165	17.52	17.51	17.51

**Table 9-54**  
**5 GHz WLAN Maximum Average RF Power – Ant 2**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	17.69	17.75	17.67
5200	40	17.74	17.68	17.74
5220	44	17.60	17.67	17.58
5240	48	17.67	17.65	17.67
5260	52	17.86	17.86	17.77
5280	56	<b>17.89</b>	17.90	17.82
5300	60	15.79	15.25	15.21
5320	64	16.29	15.20	15.17
5500	100	17.91	17.89	17.95
5600	120	17.93	17.89	17.90
5620	124	17.94	17.91	17.91
5720	144	<b>17.99</b>	17.93	17.89
5745	149	<b>17.95</b>	17.97	17.99
5785	157	17.56	17.97	17.91
5825	165	17.88	17.96	17.88

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 62 of 114	

**Table 9-55**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 1**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax - SU
		Average	Average	Average	Average
2412	1	15.72	15.98	14.94	15.26
2437	6	15.90	15.78	15.81	15.85
2462	11	15.89	13.92	13.90	13.66

**Table 9-56**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax - SU
		Average	Average	Average	Average
2412	1	15.79	15.99	15.49	15.32
2437	6	15.80	15.88	15.72	15.77
2462	11	15.71	13.73	13.65	13.92

**Table 9-57**  
**5 GHz WLAN Reduced Average RF Power – Ant 1**

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	14.94
5290	58	14.64
5530	106	14.46
5610	122	14.56
5690	138	14.41
5775	155	14.98

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 63 of 114	

**Table 9-58**  
**5 GHz WLAN Reduced Average RF Power – Ant 2**

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	14.96
5290	58	14.51
5530	106	14.78
5610	122	14.56
5690	138	14.85
5775	155	14.97


**Table 9-59**  
**5 GHz WLAN Reduced Average RF Power – MIMO**

5GHz (80MHz) 802.11ac Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5210	42	14.94	14.96	17.96
5290	58	14.64	14.51	17.59
5530	106	14.46	14.78	17.63
5610	122	14.56	14.56	17.57
5690	138	14.41	14.85	17.65
5775	155	14.98	14.97	17.99

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 64 of 114

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

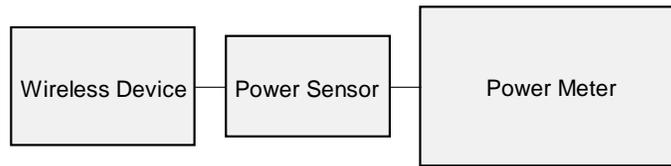

**Figure 9-3**  
**Power Measurement Setup**

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 65 of 114	

## 9.5 Bluetooth Conducted Powers

Table 9-60  
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	15.07	32.147
2441	1.0	GFSK	39	<b>15.93</b>	39.179
2480	1.0	GFSK	78	14.37	27.361
2402	2.0	$\pi/4$ -DQPSK	0	10.47	11.150
2441	2.0	$\pi/4$ -DQPSK	39	11.49	14.100
2480	2.0	$\pi/4$ -DQPSK	78	9.63	9.193
2402	3.0	8DPSK	0	10.55	11.349
2441	3.0	8DPSK	39	11.58	14.386
2480	3.0	8DPSK	78	9.73	9.389

Note: The bolded data rates and channel above were tested for SAR.


FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 66 of 114

**Figure 9-4**  
**Bluetooth Transmission Plot**



**Equation 9-1**  
**Bluetooth Duty Cycle Calculation**

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.91\ ms}{3.75\ ms} * 100\% = 77.6\%$$

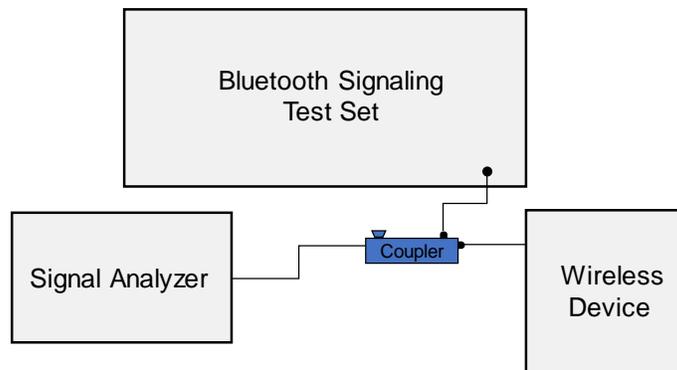

**Figure 9-5**  
**Power Measurement Setup**

FCC ID: A3LSMG977KOR	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 67 of 114

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
2/14/2019	750H	20.7	700	0.881	42.165	0.889	42.201	-0.90%	-0.09%
			710	0.883	42.129	0.890	42.149	-0.79%	-0.05%
			720	0.891	42.061	0.891	42.097	0.00%	-0.09%
			725	0.889	42.069	0.891	42.071	-0.22%	0.00%
			740	0.897	41.952	0.893	41.994	0.45%	-0.10%
			755	0.899	41.906	0.894	41.916	0.56%	-0.02%
			770	0.905	41.925	0.895	41.838	1.12%	0.21%
			785	0.911	41.869	0.896	41.760	1.67%	0.26%
2/1/2019	835H	21.1	820	0.922	41.042	0.899	41.578	2.56%	-1.29%
			835	0.928	40.992	0.900	41.500	3.11%	-1.22%
			850	0.933	40.934	0.916	41.500	1.86%	-1.36%
2/4/2019	835H	21.1	820	0.900	40.774	0.899	41.578	0.11%	-1.93%
			835	0.905	40.726	0.900	41.500	0.56%	-1.87%
			850	0.910	40.676	0.916	41.500	-0.66%	-1.99%
2/8/2019	835H	21.1	820	0.909	41.195	0.899	41.578	1.11%	-0.92%
			835	0.915	41.145	0.900	41.500	1.67%	-0.86%
			850	0.921	41.095	0.916	41.500	0.55%	-0.98%
2/4/2019	1750H	21.1	1710	1.366	41.930	1.348	40.142	1.34%	4.45%
			1750	1.387	41.854	1.371	40.079	1.17%	4.43%
			1790	1.410	41.786	1.394	40.016	1.15%	4.42%
2/4/2019	1900H	21.1	1850	1.399	38.617	1.400	40.000	-0.07%	-3.46%
			1880	1.417	38.578	1.400	40.000	1.21%	-3.55%
			1910	1.436	38.536	1.400	40.000	2.57%	-3.66%
2/6/2019	1900H	21.5	1850	1.401	39.085	1.400	40.000	0.07%	-2.29%
			1880	1.418	39.011	1.400	40.000	1.29%	-2.47%
			1910	1.435	38.956	1.400	40.000	2.50%	-2.61%
2/5/2019	2450H	22.4	2500	1.828	38.162	1.855	39.136	-1.46%	-2.49%
			2550	1.869	38.105	1.909	39.073	-2.10%	-2.48%
			2600	1.909	38.043	1.964	39.009	-2.80%	-2.48%
			2650	1.948	37.962	2.018	38.945	-3.47%	-2.52%
			2700	1.989	37.865	2.073	38.882	-4.05%	-2.62%
2/21/2019	2450H	21.2	2400	1.773	40.470	1.756	39.289	0.97%	3.01%
			2450	1.813	40.397	1.800	39.200	0.72%	3.05%
			2500	1.854	40.307	1.855	39.136	-0.05%	2.99%
3/7/2019	2450H	20.4	2400	1.776	39.602	1.756	39.289	1.14%	0.80%
			2450	1.816	39.498	1.800	39.200	0.89%	0.76%
			2500	1.856	39.429	1.855	39.136	0.05%	0.75%
02/19/2019	5200H-5800H	21.1	5240	4.565	34.926	4.696	35.940	-2.79%	-2.82%
			5260	4.581	34.840	4.717	35.917	-2.88%	-3.00%
			5280	4.615	34.824	4.737	35.894	-2.58%	-2.98%
			5300	4.642	34.821	4.758	35.871	-2.44%	-2.93%
			5600	4.978	34.279	5.065	35.529	-1.72%	-3.52%
			5620	5.008	34.245	5.086	35.506	-1.53%	-3.55%
			5640	5.042	34.238	5.106	35.483	-1.25%	-3.51%
			5660	5.053	34.188	5.127	35.460	-1.44%	-3.59%
			5680	5.079	34.139	5.147	35.437	-1.32%	-3.66%
			5700	5.109	34.131	5.168	35.414	-1.14%	-3.62%
			5745	5.162	34.044	5.214	35.363	-1.00%	-3.73%
			5765	5.194	34.018	5.234	35.340	-0.76%	-3.74%
			5785	5.213	33.965	5.255	35.317	-0.80%	-3.83%
			5800	5.224	33.945	5.270	35.300	-0.87%	-3.84%

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 68 of 114	

**Table 10-2  
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
2/11/2019	750B	21.1	700	0.957	53.339	0.959	55.726	-0.21%	-4.28%
			710	0.961	53.313	0.960	55.687	0.10%	-4.26%
			720	0.965	53.276	0.961	55.648	0.42%	-4.26%
			725	0.967	53.263	0.961	55.629	0.62%	-4.25%
			740	0.973	53.221	0.963	55.570	1.04%	-4.23%
			755	0.978	53.179	0.964	55.512	1.45%	-4.20%
			770	0.984	53.136	0.965	55.453	1.97%	-4.18%
			785	0.989	53.089	0.966	55.395	2.38%	-4.16%
			700	0.927	53.962	0.959	55.726	-3.34%	-3.17%
2/25/2019	750B	19.8	710	0.932	53.942	0.960	55.687	-2.92%	-3.13%
			720	0.936	53.920	0.961	55.648	-2.60%	-3.11%
			725	0.938	53.914	0.961	55.629	-2.39%	-3.08%
			740	0.943	53.874	0.963	55.570	-2.08%	-3.05%
			755	0.947	53.838	0.964	55.512	-1.76%	-3.02%
			770	0.950	53.802	0.965	55.453	-1.55%	-2.98%
			785	0.955	53.750	0.966	55.395	-1.14%	-2.97%
			820	0.956	54.254	0.969	55.258	-1.34%	-1.82%
			835	0.972	54.098	0.970	55.200	0.21%	-2.00%
2/18/2019	835B	20.0	850	0.988	53.934	0.988	55.154	0.00%	-2.21%
			820	0.959	53.939	0.969	55.258	-1.03%	-2.39%
			835	0.975	53.775	0.970	55.200	0.52%	-2.58%
2/25/2019	835B	20.0	850	0.991	53.611	0.988	55.154	0.30%	-2.80%
			820	0.969	54.417	0.969	55.258	0.00%	-1.52%
			835	0.984	54.264	0.970	55.200	1.44%	-1.70%
2/20/2019	1750B	21.7	850	1.001	54.171	0.988	55.154	1.32%	-1.78%
			1710	1.410	52.659	1.463	53.537	-3.62%	-1.64%
			1750	1.457	52.518	1.488	53.432	-2.08%	-1.71%
2/11/2019	1900B	22.2	1790	1.495	52.430	1.514	53.326	-1.25%	-1.68%
			1850	1.518	53.479	1.520	53.300	-0.13%	0.34%
			1880	1.554	53.356	1.520	53.300	2.24%	0.11%
2/14/2019	1900B	23.4	1910	1.591	53.218	1.520	53.300	4.67%	-0.15%
			1850	1.506	52.497	1.520	53.300	-0.92%	-1.51%
			1880	1.536	52.388	1.520	53.300	1.05%	-1.71%
2/5/2019	2450B	23.2	1910	1.571	52.335	1.520	53.300	3.36%	-1.81%
			2400	1.975	52.118	1.902	52.767	3.84%	-1.23%
			2450	2.035	51.977	1.950	52.700	4.36%	-1.37%
			2500	2.091	51.817	2.021	52.636	3.46%	-1.56%
			2550	2.152	51.661	2.092	52.573	2.87%	-1.73%
			2600	2.212	51.487	2.163	52.509	2.27%	-1.95%
2/7/2019	2450B	22.7	2400	1.968	52.063	1.902	52.767	3.47%	-1.33%
			2450	2.026	51.948	1.950	52.700	3.90%	-1.43%
			2500	2.083	51.815	2.021	52.636	3.07%	-1.56%
			2550	2.142	51.656	2.092	52.573	2.39%	-1.74%
			2600	2.205	51.497	2.163	52.509	1.94%	-1.93%
			2500	2.094	51.812	2.021	52.636	3.61%	-1.57%
2/11/2019	2450B	22.8	2550	2.151	51.663	2.092	52.573	2.82%	-1.73%
			2600	2.212	51.524	2.163	52.509	2.27%	-1.88%
			2650	2.270	51.356	2.234	52.445	1.61%	-2.08%
			2700	2.331	51.220	2.305	52.382	1.13%	-2.22%
			5240	5.409	47.322	5.346	48.960	1.18%	-3.35%
			5260	5.445	47.302	5.369	48.933	1.42%	-3.33%
02/06/2019	5200B-5800B	20.6	5280	5.474	47.299	5.393	48.906	1.50%	-3.29%
			5300	5.499	47.205	5.416	48.879	1.53%	-3.42%
			5580	5.907	46.668	5.743	48.499	2.96%	-3.78%
			5600	5.926	46.639	5.766	48.471	2.77%	-3.78%
			5620	5.960	46.600	5.790	48.444	2.94%	-3.81%
			5640	6.000	46.547	5.813	48.417	3.22%	-3.86%
			5660	6.024	46.476	5.837	48.390	3.20%	-3.96%
			5680	6.064	46.469	5.860	48.363	3.48%	-3.92%
			5700	6.082	46.459	5.883	48.336	3.38%	-3.88%
			5745	6.156	46.347	5.936	48.275	3.71%	-3.99%
			5765	6.196	46.304	5.959	48.248	3.98%	-4.03%
			5785	6.213	46.303	5.982	48.220	3.86%	-3.98%
			5800	6.235	46.277	6.000	48.200	3.92%	-3.99%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 69 of 114	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.


**Table 10-3  
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
G	750	HEAD	02/14/2019	22.9	20.7	0.200	1054	7410	1.710	8.370	8.550	2.15%
G	835	HEAD	02/01/2019	22.6	21.1	0.200	4d047	7410	2.000	9.470	10.000	5.60%
G	835	HEAD	02/04/2019	21.5	21.1	0.200	4d133	7410	1.970	9.430	9.850	4.45%
G	835	HEAD	02/08/2019	21.3	21.1	0.200	4d133	7410	2.010	9.430	10.050	6.57%
H	1750	HEAD	02/04/2019	22.3	21.1	0.100	1008	7409	3.790	36.200	37.900	4.70%
G	1900	HEAD	02/04/2019	21.5	21.1	0.100	5d149	7410	3.950	39.300	39.500	0.51%
G	1900	HEAD	02/06/2019	22.6	21.5	0.100	5d149	7410	4.090	39.300	40.900	4.07%
E	2450	HEAD	02/21/2019	22.1	21.0	0.100	981	3589	4.870	52.300	48.700	-6.88%
E	2450	HEAD	03/07/2019	21.8	20.4	0.100	719	3589	5.260	51.900	52.600	1.35%
G	2600	HEAD	02/05/2019	24.0	22.4	0.100	1004	7410	5.310	55.900	53.100	-5.01%
H	5250	HEAD	02/19/2019	21.6	21.1	0.050	1237	7409	3.840	81.300	76.800	-5.54%
H	5600	HEAD	02/19/2019	21.6	21.1	0.050	1237	7409	4.170	85.700	83.400	-2.68%
H	5750	HEAD	02/19/2019	21.6	21.1	0.050	1237	7409	3.750	80.600	75.000	-6.95%
E	750	BODY	02/11/2019	21.9	21.1	0.200	1003	3589	1.720	8.580	8.600	0.23%
E	750	BODY	02/25/2019	21.8	19.8	0.200	1003	3589	1.730	8.580	8.650	0.82%
D	835	BODY	02/04/2019	22.1	21.2	0.200	4d047	7357	1.980	9.710	9.900	1.96%
D	835	BODY	02/25/2019	21.4	20.0	0.200	4d047	7357	2.070	9.710	10.350	6.59%
G	1750	BODY	02/20/2019	21.6	21.7	0.100	1150	7410	3.780	36.600	37.800	3.28%
J	1900	BODY	02/11/2019	21.4	20.8	0.100	5d149	7488	4.180	39.400	41.800	6.09%
J	1900	BODY	02/14/2019	21.1	21.9	0.100	5d080	7488	4.040	39.200	40.400	3.06%
K	2450	BODY	02/05/2019	22.7	22.9	0.100	981	3319	4.950	50.900	49.500	-2.75%
K	2450	BODY	02/07/2019	21.8	21.7	0.100	981	3319	5.080	50.900	50.800	-0.20%
K	2600	BODY	02/11/2019	21.9	21.1	0.100	1004	3319	5.180	54.800	51.800	-5.47%
L	5250	BODY	02/06/2019	21.3	20.6	0.050	1057	7308	3.580	75.900	71.600	-5.67%
L	5600	BODY	02/06/2019	21.3	20.6	0.050	1057	7308	3.930	79.900	78.600	-1.63%
L	5750	BODY	02/06/2019	21.3	20.6	0.050	1057	7308	3.520	76.700	70.400	-8.21%

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 70 of 114

**Table 10-4  
System Verification Results – 10g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
D	835	BODY	02/18/2019	21.5	20.0	0.200	4d047	7357	1.350	6.360	6.750	6.13%
G	1750	BODY	02/20/2019	21.6	21.7	0.100	1150	7410	2.010	19.400	20.100	3.61%
J	1900	BODY	02/11/2019	21.4	20.8	0.100	5d149	7488	2.140	20.700	21.400	3.38%
K	2600	BODY	02/11/2019	21.9	21.1	0.100	1004	3319	2.290	24.700	22.900	-7.29%
L	5250	BODY	02/06/2019	21.3	20.6	0.050	1057	7308	0.990	21.100	19.800	-6.16%
L	5600	BODY	02/06/2019	21.3	20.6	0.050	1057	7308	1.070	22.300	21.400	-4.04%
L	5750	BODY	02/06/2019	21.3	20.6	0.050	1057	7308	0.975	21.200	19.500	-8.02%

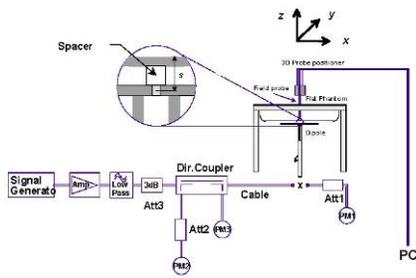

**Figure 10-1  
System Verification Setup Diagram**



**Figure 10-2  
System Verification Setup Photo**

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 71 of 114	

# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data

**Table 11-1  
GSM 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.33	-0.03	Right	Cheek	8963B	1:8.3	0.128	1.167	0.149	A1
836.60	190	GSM 850	GSM	34.0	33.33	0.04	Right	Tilt	8963B	1:8.3	0.066	1.167	0.077	
836.60	190	GSM 850	GSM	34.0	33.33	0.16	Left	Cheek	8963B	1:8.3	0.089	1.167	0.104	
836.60	190	GSM 850	GSM	34.0	33.33	0.06	Left	Tilt	8963B	1:8.3	0.067	1.167	0.078	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2  
GSM 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	31.0	30.13	-0.12	Right	Cheek	9225B	1:8.3	0.023	1.222	0.028	
1880.00	661	GSM 1900	GSM	31.0	30.13	0.18	Right	Tilt	9225B	1:8.3	0.018	1.222	0.022	
1880.00	661	GSM 1900	GSM	31.0	30.13	0.08	Left	Cheek	9225B	1:8.3	0.036	1.222	0.044	A2
1880.00	661	GSM 1900	GSM	31.0	30.13	-0.16	Left	Tilt	9225B	1:8.3	0.012	1.222	0.015	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-3  
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.01	Right	Cheek	9218B	1:1	0.093	1.151	0.107	A3
836.60	4183	UMTS 850	RMC	24.0	23.39	0.20	Right	Tilt	9218B	1:1	0.039	1.151	0.045	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.02	Left	Cheek	9218B	1:1	0.055	1.151	0.063	
836.60	4183	UMTS 850	RMC	24.0	23.39	0.05	Left	Tilt	9218B	1:1	0.033	1.151	0.038	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 72 of 114

**Table 11-4  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.03	Right	Cheek	9216B	1:1	0.044	1.279	0.056	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.01	Right	Tilt	9216B	1:1	0.032	1.279	0.041	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.02	Left	Cheek	9216B	1:1	0.058	1.279	0.074	A4
1732.40	1412	UMTS 1750	RMC	24.0	22.93	0.12	Left	Tilt	9216B	1:1	0.032	1.279	0.041	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5  
UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	-0.03	Right	Cheek	9225B	1:1	0.038	1.112	0.042	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.02	Right	Tilt	9225B	1:1	0.029	1.112	0.032	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.01	Left	Cheek	9225B	1:1	0.051	1.112	0.057	A5
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.20	Left	Tilt	9225B	1:1	0.025	1.112	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-6  
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)		(W/kg)	
707.50	23095	Mid	LTE Band 12	10	23.96	0.18	0	Right	Cheek	QPSK	1	0	9216B	1:1	0.082	1.132	0.093	A6
707.50	23095	Mid	LTE Band 12	10	23.93	-0.06	1	Right	Cheek	QPSK	25	0	9216B	1:1	0.064	1.140	0.073	
707.50	23095	Mid	LTE Band 12	10	23.96	0.15	0	Right	Tilt	QPSK	1	0	9216B	1:1	0.040	1.132	0.045	
707.50	23095	Mid	LTE Band 12	10	23.93	0.19	1	Right	Tilt	QPSK	25	0	9216B	1:1	0.035	1.140	0.040	
707.50	23095	Mid	LTE Band 12	10	23.96	0.14	0	Left	Cheek	QPSK	1	0	9216B	1:1	0.081	1.132	0.092	
707.50	23095	Mid	LTE Band 12	10	23.93	-0.10	1	Left	Cheek	QPSK	25	0	9216B	1:1	0.058	1.140	0.066	
707.50	23095	Mid	LTE Band 12	10	23.96	0.21	0	Left	Tilt	QPSK	1	0	9216B	1:1	0.047	1.132	0.053	
707.50	23095	Mid	LTE Band 12	10	23.93	0.15	1	Left	Tilt	QPSK	25	0	9216B	1:1	0.033	1.140	0.038	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 73 of 114	

**Table 11-7  
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.16	0	Right	Cheek	QPSK	1	0	9216B	1:1	0.064	1.303	0.083	A7
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.15	1	Right	Cheek	QPSK	25	0	9216B	1:1	0.048	1.291	0.062	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.04	0	Right	Tilt	QPSK	1	0	9216B	1:1	0.034	1.303	0.044	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.07	1	Right	Tilt	QPSK	25	0	9216B	1:1	0.026	1.291	0.034	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.01	0	Left	Cheek	QPSK	1	0	9216B	1:1	0.040	1.303	0.052	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.04	1	Left	Cheek	QPSK	25	0	9216B	1:1	0.031	1.291	0.040	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	-0.04	0	Left	Tilt	QPSK	1	0	9216B	1:1	0.026	1.303	0.034	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.16	1	Left	Tilt	QPSK	25	0	9216B	1:1	0.021	1.291	0.027	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-8  
LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.00	0	Right	Cheek	QPSK	1	0	8963B	1:1	0.113	1.104	0.125	A8
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.05	1	Right	Cheek	QPSK	36	0	8963B	1:1	0.092	1.094	0.101	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	-0.12	0	Right	Tilt	QPSK	1	0	8963B	1:1	0.052	1.104	0.057	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.15	1	Right	Tilt	QPSK	36	0	8963B	1:1	0.048	1.094	0.053	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	-0.15	0	Left	Cheek	QPSK	1	0	8963B	1:1	0.086	1.104	0.095	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.12	1	Left	Cheek	QPSK	36	0	8963B	1:1	0.066	1.094	0.072	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.14	0	Left	Tilt	QPSK	1	0	8963B	1:1	0.055	1.104	0.061	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.18	1	Left	Tilt	QPSK	36	0	8963B	1:1	0.040	1.094	0.044	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-9  
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Ant State	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	-0.03	0	Right	Cheek	QPSK	1	0	8963B	1:1	0.110	1.346	0.148	A9
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.01	1	Right	Cheek	QPSK	25	0	8963B	1:1	0.091	1.343	0.122	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.16	0	Right	Tilt	QPSK	1	0	8963B	1:1	0.056	1.346	0.075	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.00	1	Right	Tilt	QPSK	25	0	8963B	1:1	0.044	1.343	0.059	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	-0.07	0	Left	Cheek	QPSK	1	0	8963B	1:1	0.086	1.346	0.116	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.08	1	Left	Cheek	QPSK	25	0	8963B	1:1	0.065	1.343	0.087	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.03	0	Left	Tilt	QPSK	1	0	8963B	1:1	0.048	1.346	0.065	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.08	1	Left	Tilt	QPSK	25	0	8963B	1:1	0.039	1.343	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 74 of 114

**Table 11-10  
LTE Band 66 (AWS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	0.13	0	Right	Cheek	QPSK	1	99	9216B	1:1	0.047	1.349	0.063	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	0.13	1	Right	Cheek	QPSK	50	50	9216B	1:1	0.036	1.361	0.049	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	0.20	0	Right	Tilt	QPSK	1	99	9216B	1:1	0.044	1.349	0.059	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	0.16	1	Right	Tilt	QPSK	50	50	9216B	1:1	0.029	1.361	0.039	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	0.10	0	Left	Cheek	QPSK	1	99	9216B	1:1	0.059	1.349	0.080	A10
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	0.12	1	Left	Cheek	QPSK	50	50	9216B	1:1	0.047	1.361	0.064	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	0.16	0	Left	Tilt	QPSK	1	99	9216B	1:1	0.040	1.349	0.054	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	0.15	1	Left	Tilt	QPSK	50	50	9216B	1:1	0.031	1.361	0.042	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-11  
LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	0.13	0	Right	Cheek	QPSK	1	50	8963B	1:1	0.041	1.282	0.053	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.19	1	Right	Cheek	QPSK	50	0	8963B	1:1	0.029	1.312	0.038	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	0.16	0	Right	Tilt	QPSK	1	50	8963B	1:1	0.032	1.282	0.041	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.14	1	Right	Tilt	QPSK	50	0	8963B	1:1	0.026	1.312	0.034	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	-0.06	0	Left	Cheek	QPSK	1	50	8963B	1:1	0.065	1.282	0.083	A11
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.12	1	Left	Cheek	QPSK	50	0	8963B	1:1	0.045	1.312	0.059	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	0.03	0	Left	Tilt	QPSK	1	50	8963B	1:1	0.027	1.282	0.035	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.18	1	Left	Tilt	QPSK	50	0	8963B	1:1	0.021	1.312	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12  
LTE Band 41 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2680.00	41490	High	LTE Band 41	20	25.0	24.65	0.15	0	Right	Cheek	QPSK	1	0	9216B	1:1.58	0.016	1.084	0.017	
2680.00	41490	High	LTE Band 41	20	24.0	23.69	0.13	1	Right	Cheek	QPSK	50	0	9216B	1:1.58	0.011	1.074	0.012	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	0.18	0	Right	Tilt	QPSK	1	0	9216B	1:1.58	0.007	1.084	0.008	
2680.00	41490	High	LTE Band 41	20	24.0	23.69	0.17	1	Right	Tilt	QPSK	50	0	9216B	1:1.58	0.005	1.074	0.005	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	0.14	0	Left	Cheek	QPSK	1	0	9216B	1:1.58	0.026	1.084	0.028	A12
2680.00	41490	High	LTE Band 41	20	24.0	23.69	0.15	1	Left	Cheek	QPSK	50	0	9216B	1:1.58	0.017	1.074	0.018	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	-0.05	0	Left	Tilt	QPSK	1	0	9216B	1:1.58	0.010	1.084	0.011	
2680.00	41490	High	LTE Band 41	20	24.0	23.69	0.12	1	Left	Tilt	QPSK	50	0	9216B	1:1.58	0.007	1.074	0.008	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 75 of 114

**Table 11-13  
DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	16.0	15.90	0.21	Right	Cheek	1	9212B	1	99.9	1.409	0.695	1.023	1.001	0.712	
2412	1	802.11b	DSSS	22	16.0	15.72	0.16	Right	Tilt	1	9212B	1	99.9	0.885	0.682	1.067	1.001	0.728	
2437	6	802.11b	DSSS	22	16.0	15.90	0.21	Right	Tilt	1	9212B	1	99.9	1.302	0.705	1.023	1.001	0.722	A13
2462	11	802.11b	DSSS	22	16.0	15.89	0.17	Right	Tilt	1	9212B	1	99.9	0.849	0.687	1.026	1.001	0.706	
2437	6	802.11b	DSSS	22	16.0	15.90	0.18	Left	Cheek	1	9212B	1	99.9	0.287	-	1.023	1.001	-	
2437	6	802.11b	DSSS	22	16.0	15.90	0.16	Left	Tilt	1	9212B	1	99.9	0.274	-	1.023	1.001	-	
2437	6	802.11b	DSSS	22	16.0	15.80	0.18	Right	Cheek	2	9212B	1	99.8	0.014	-	1.047	1.002	-	
2437	6	802.11b	DSSS	22	16.0	15.80	0.15	Right	Tilt	2	9212B	1	99.8	0.008	-	1.047	1.002	-	
2437	6	802.11b	DSSS	22	16.0	15.80	-0.19	Left	Cheek	2	9212B	1	99.8	0.007	-	1.047	1.002	-	
2437	6	802.11b	DSSS	22	16.0	15.80	0.20	Left	Tilt	2	9212B	1	99.8	0.015	0.009	1.047	1.002	0.009	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-14  
NII SISO Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5290	58	802.11ac	OFDM	80	15.0	14.64	0.14	Right	Cheek	1	9212B	29.3	94.6	0.541	-	1.086	1.057	-	
5290	58	802.11ac	OFDM	80	15.0	14.64	0.14	Right	Tilt	1	9212B	29.3	94.6	0.606	0.221	1.086	1.057	0.254	
5290	58	802.11ac	OFDM	80	15.0	14.64	0.17	Left	Cheek	1	9212B	29.3	94.6	0.227	-	1.086	1.057	-	
5290	58	802.11ac	OFDM	80	15.0	14.64	-0.20	Left	Tilt	1	9212B	29.3	94.6	0.241	-	1.086	1.057	-	
5290	58	802.11ac	OFDM	80	15.0	14.51	-0.21	Right	Cheek	2	9212B	29.3	94.6	0.074	-	1.119	1.057	-	
5290	58	802.11ac	OFDM	80	15.0	14.51	0.17	Right	Tilt	2	9212B	29.3	94.6	0.076	0.018	1.119	1.057	0.021	
5290	58	802.11ac	OFDM	80	15.0	14.51	0.18	Left	Cheek	2	9212B	29.3	94.6	0.036	-	1.119	1.057	-	
5290	58	802.11ac	OFDM	80	15.0	14.51	0.21	Left	Tilt	2	9212B	29.3	94.6	0.033	-	1.119	1.057	-	
5610	122	802.11ac	OFDM	80	15.0	14.56	0.17	Right	Cheek	1	9212B	29.3	94.6	0.291	0.124	1.107	1.057	0.145	
5610	122	802.11ac	OFDM	80	15.0	14.56	0.14	Right	Tilt	1	9212B	29.3	94.6	0.277	-	1.107	1.057	-	
5610	122	802.11ac	OFDM	80	15.0	14.56	0.18	Left	Cheek	1	9212B	29.3	94.6	0.118	-	1.107	1.057	-	
5610	122	802.11ac	OFDM	80	15.0	14.56	0.19	Left	Tilt	1	9212B	29.3	94.6	0.172	-	1.107	1.057	-	
5690	138	802.11ac	OFDM	80	15.0	14.85	0.05	Right	Cheek	2	9212B	29.3	94.6	0.513	0.186	1.035	1.057	0.203	
5690	138	802.11ac	OFDM	80	15.0	14.85	0.15	Right	Tilt	2	9212B	29.3	94.6	0.414	-	1.035	1.057	-	
5690	138	802.11ac	OFDM	80	15.0	14.85	-0.15	Left	Cheek	2	9212B	29.3	94.6	0.122	-	1.035	1.057	-	
5690	138	802.11ac	OFDM	80	15.0	14.85	0.17	Left	Tilt	2	9212B	29.3	94.6	0.116	-	1.035	1.057	-	
5775	155	802.11ac	OFDM	80	15.0	14.98	0.14	Right	Cheek	1	9212B	29.3	94.6	0.342	-	1.005	1.057	-	
5775	155	802.11ac	OFDM	80	15.0	14.98	0.21	Right	Tilt	1	9212B	29.3	94.6	0.748	0.214	1.005	1.057	0.227	
5775	155	802.11ac	OFDM	80	15.0	14.98	0.19	Left	Cheek	1	9212B	29.3	94.6	0.109	-	1.005	1.057	-	
5775	155	802.11ac	OFDM	80	15.0	14.98	-0.13	Left	Tilt	1	9212B	29.3	94.6	0.145	-	1.005	1.057	-	
5775	155	802.11ac	OFDM	80	15.0	14.97	0.18	Right	Cheek	2	9212B	29.3	94.6	0.583	0.208	1.007	1.057	0.221	
5775	155	802.11ac	OFDM	80	15.0	14.97	0.21	Right	Tilt	2	9212B	29.3	94.6	0.359	-	1.007	1.057	-	
5775	155	802.11ac	OFDM	80	15.0	14.97	0.19	Left	Cheek	2	9212B	29.3	94.6	0.124	-	1.007	1.057	-	
5775	155	802.11ac	OFDM	80	15.0	14.97	0.13	Left	Tilt	2	9212B	29.3	94.6	0.142	-	1.007	1.057	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 76 of 114

**Table 11-15  
NII MIMO Head SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															(W/kg)	(W/kg)	(W/kg)	(W/kg)		
5290	58	802.11ac	OFDM	80	15.0	14.64	15.0	14.51	0.16	Right	Cheek	MMO	9212B	58.5	90.9	0.455	0.246	1.119	1.100	0.303	
5290	58	802.11ac	OFDM	80	15.0	14.64	15.0	14.51	0.19	Right	Tilt	MMO	9212B	58.5	90.9	0.411	-	1.119	1.100	-	
5290	58	802.11ac	OFDM	80	15.0	14.64	15.0	14.51	-0.19	Left	Cheek	MMO	9212B	58.5	90.9	0.276	-	1.119	1.100	-	
5290	58	802.11ac	OFDM	80	15.0	14.64	15.0	14.51	0.00	Left	Tilt	MMO	9212B	58.5	90.9	0.316	-	1.119	1.100	-	
5690	138	802.11ac	OFDM	80	15.0	14.41	15.0	14.85	0.19	Right	Cheek	MMO	9212B	58.5	90.9	0.669	0.262	1.146	1.100	0.330	
5690	138	802.11ac	OFDM	80	15.0	14.41	15.0	14.85	0.17	Right	Tilt	MMO	9212B	58.5	90.9	0.665	-	1.146	1.100	-	
5690	138	802.11ac	OFDM	80	15.0	14.41	15.0	14.85	0.12	Left	Cheek	MMO	9212B	58.5	90.9	0.211	-	1.146	1.100	-	
5690	138	802.11ac	OFDM	80	15.0	14.41	15.0	14.85	-0.15	Left	Tilt	MMO	9212B	58.5	90.9	0.239	-	1.146	1.100	-	
5775	155	802.11ac	OFDM	80	15.0	14.98	15.0	14.97	0.13	Right	Cheek	MMO	9212B	58.5	90.9	0.765	0.299	1.007	1.100	0.331	A14
5775	155	802.11ac	OFDM	80	15.0	14.98	15.0	14.97	-0.17	Right	Tilt	MMO	9212B	58.5	90.9	0.718	-	1.007	1.100	-	
5775	155	802.11ac	OFDM	80	15.0	14.98	15.0	14.97	0.19	Left	Cheek	MMO	9212B	58.5	90.9	0.232	-	1.007	1.100	-	
5775	155	802.11ac	OFDM	80	15.0	14.98	15.0	14.97	0.13	Left	Tilt	MMO	9212B	58.5	90.9	0.224	-	1.007	1.100	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

To achieve the 18 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 15 dBm.

**Table 11-16  
DSS Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #	
MHz	Ch.											(W/kg)	(W/kg)	(W/kg)			
2402.00	0	Bluetooth	FHSS	16.0	15.07	0.11	Right	Cheek	8968B	1	77.6	0.556	1.239	1.289	0.888		
2441.00	39	Bluetooth	FHSS	16.0	15.93	0.02	Right	Cheek	8968B	1	77.6	0.616	1.016	1.289	0.807	A15	
2480.00	78	Bluetooth	FHSS	16.0	14.37	0.01	Right	Cheek	8968B	1	77.6	0.584	1.455	1.289	1.095		
2441.00	39	Bluetooth	FHSS	16.0	15.93	-0.10	Right	Tilt	8968B	1	77.6	0.538	1.016	1.289	0.705		
2441.00	39	Bluetooth	FHSS	16.0	15.93	0.08	Left	Cheek	8968B	1	77.6	0.122	1.016	1.289	0.160		
2441.00	39	Bluetooth	FHSS	16.0	15.93	0.16	Left	Tilt	8968B	1	77.6	0.120	1.016	1.289	0.157		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram					

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 77 of 114	

## 11.2 Standalone Body-Worn SAR Data

**Table 11-17  
GSM/UMTS Body-Worn SAR Data**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM850	GSM	34.0	33.33	0.08	15 mm	9216B	1:8.3	back	0.122	1.167	0.142	A16
1880.00	661	GSM 1900	GSM	31.0	30.13	0.01	15 mm	5656B	1:8.3	back	0.136	1.222	0.166	A18
836.60	4183	UMTS 850	RMC	24.0	23.39	0.03	15 mm	9225B	1:1	back	0.145	1.151	0.167	A20
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.03	15 mm	5621B	1:1	back	0.379	1.279	0.485	A22
1852.40	9262	UMTS 1900	RMC	24.0	23.54	-0.01	15 mm	5656B	1:1	back	0.204	1.112	0.227	A24
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-18  
LTE Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Ant State	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)		(W/kg)	
707.50	23095	Mid	LTE Band 12	10	N/A	24.5	23.96	0.03	0	5655B	QPSK	1	0	15 mm	back	1:1	0.115	1.132	0.130	A26
707.50	23095	Mid	LTE Band 12	10	N/A	23.5	22.93	-0.01	1	5655B	QPSK	25	0	15 mm	back	1:1	0.095	1.140	0.108	
782.00	23230	Mid	LTE Band 13	10	N/A	24.5	23.35	-0.02	0	8963B	QPSK	1	0	15 mm	back	1:1	0.114	1.303	0.149	A28
782.00	23230	Mid	LTE Band 13	10	N/A	23.5	22.39	0.03	1	8963B	QPSK	25	0	15 mm	back	1:1	0.092	1.291	0.119	
831.50	26865	Mid	LTE Band 26 (Cell)	15	N/A	24.5	24.07	0.03	0	9225B	QPSK	1	0	15 mm	back	1:1	0.135	1.104	0.149	A30
831.50	26865	Mid	LTE Band 26 (Cell)	15	N/A	23.5	23.11	0.02	1	9225B	QPSK	36	0	15 mm	back	1:1	0.112	1.094	0.123	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.04	0	9225B	QPSK	1	0	15 mm	back	1:1	0.150	1.346	0.202	A32
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.05	1	9225B	QPSK	25	0	15 mm	back	1:1	0.119	1.343	0.160	
1720.00	132072	Low	LTE Band 66 (AWS)	20	N/A	24.5	23.20	0.04	0	5584B	QPSK	1	99	15 mm	back	1:1	0.187	1.349	0.252	A34
1720.00	132072	Low	LTE Band 66 (AWS)	20	N/A	23.5	22.16	0.01	1	5584B	QPSK	50	50	15 mm	back	1:1	0.171	1.361	0.233	
1860.00	26140	Low	LTE Band 25 (PCS)	20	N/A	24.5	23.42	-0.02	0	5656B	QPSK	1	50	15 mm	back	1:1	0.241	1.282	0.309	A36
1860.00	26140	Low	LTE Band 25 (PCS)	20	N/A	23.5	22.32	0.03	1	5656B	QPSK	50	0	15 mm	back	1:1	0.199	1.312	0.261	
2680.00	41490	High	LTE Band 41	20	N/A	25.0	24.65	0.13	0	5621B	QPSK	1	0	15 mm	back	1:1.58	0.095	1.084	0.103	A38
2680.00	41490	High	LTE Band 41	20	N/A	24.0	23.69	0.05	1	5621B	QPSK	50	0	15 mm	back	1:1.58	0.085	1.074	0.091	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

**Table 11-19  
DTS Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													(W/kg)	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	19.0	18.79	0.03	15 mm	1	9215B	1	back	99.9	0.081	0.070	1.050	1.001	0.074	
2437	6	802.11b	DSSS	22	19.0	18.99	0.20	15 mm	2	9215B	1	back	99.8	0.087	0.075	1.002	1.002	0.075	A40
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 78 of 114	

**Table 11-20  
NII Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													(W/kg)	(W/kg)	(W/kg)			
5280	56	802.11a	OFDM	20	18.0	17.82	-0.10	15 mm	1	8968B	6	back	98.8	0.450	0.208	1.042	1.012	0.219	
5280	56	802.11a	OFDM	20	18.0	17.89	-0.15	15 mm	2	8968B	6	back	98.8	0.212	0.091	1.026	1.012	0.094	
5600	120	802.11a	OFDM	20	18.0	17.78	-0.17	15 mm	1	8968B	6	back	98.8	0.483	0.214	1.052	1.012	0.228	
5720	144	802.11a	OFDM	20	18.0	17.99	-0.15	15 mm	2	8968B	6	back	98.8	0.516	0.229	1.002	1.012	0.248	A42
5745	149	802.11a	OFDM	20	18.0	17.63	-0.19	15 mm	1	8968B	6	back	98.8	0.394	0.170	1.089	1.012	0.187	
5745	149	802.11a	OFDM	20	18.0	17.95	-0.08	15 mm	2	8968B	6	back	98.8	0.518	0.225	1.012	1.012	0.230	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-21  
DSS Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)	(Cond Power)	(Duty Cycle)	(W/kg)	
2441	39	Bluetooth	FHSS	16.0	15.93	0.08	15 mm	8969B	1	back	77.6	0.018	1.016	1.289	0.024	A44
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset		Page 79 of 114

# 11.3 Standalone Hotspot SAR Data

**Table 11-22  
GPRS/UMTS Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	29.5	27.54	-0.05	10 mm	9216B	4	1:2.076	back	0.305	1.570	0.479	A17
836.60	190	GSM 850	GPRS	29.5	27.54	0.18	10 mm	9216B	4	1:2.076	front	0.249	1.570	0.391	
836.60	190	GSM 850	GPRS	29.5	27.54	-0.03	10 mm	9216B	4	1:2.076	bottom	0.209	1.570	0.328	
836.60	190	GSM 850	GPRS	29.5	27.54	0.02	10 mm	9216B	4	1:2.076	right	0.118	1.570	0.185	
836.60	190	GSM 850	GPRS	29.5	27.54	0.12	10 mm	9216B	4	1:2.076	left	0.059	1.570	0.093	
1880.00	661	GSM 1900	GPRS	26.5	25.52	0.01	10 mm	5656B	3	1:2.76	back	0.296	1.253	0.371	
1880.00	661	GSM 1900	GPRS	26.5	25.52	0.10	10 mm	5656B	3	1:2.76	front	0.270	1.253	0.338	
1850.20	512	GSM 1900	GPRS	26.5	25.63	-0.06	10 mm	5656B	3	1:2.76	bottom	0.419	1.222	0.512	
1880.00	661	GSM 1900	GPRS	26.5	25.52	-0.02	10 mm	5656B	3	1:2.76	bottom	0.665	1.253	0.833	
1909.80	810	GSM 1900	GPRS	26.5	25.55	0.01	10 mm	5656B	3	1:2.76	bottom	0.815	1.245	1.015	A19
1880.00	661	GSM 1900	GPRS	26.5	25.52	-0.05	10 mm	5656B	3	1:2.76	right	0.067	1.253	0.084	
1880.00	661	GSM 1900	GPRS	26.5	25.52	0.18	10 mm	5656B	3	1:2.76	left	0.033	1.253	0.041	
1909.80	810	GSM 1900	GPRS	26.5	25.55	0.19	10 mm	5656B	3	1:2.76	bottom	0.793	1.245	0.987	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.06	10 mm	6428B	N/A	1:1	back	0.336	1.151	0.387	A21
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.05	10 mm	6428B	N/A	1:1	front	0.249	1.151	0.287	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.07	10 mm	6428B	N/A	1:1	bottom	0.226	1.151	0.260	
836.60	4183	UMTS 850	RMC	24.0	23.39	0.03	10 mm	6428B	N/A	1:1	right	0.108	1.151	0.124	
836.60	4183	UMTS 850	RMC	24.0	23.39	0.09	10 mm	6428B	N/A	1:1	left	0.057	1.151	0.066	
1732.40	1412	UMTS 1750	RMC	21.0	19.94	-0.06	10 mm	5621B	N/A	1:1	back	0.332	1.276	0.424	
1732.40	1412	UMTS 1750	RMC	21.0	19.94	-0.03	10 mm	5621B	N/A	1:1	front	0.259	1.276	0.330	
1712.40	1312	UMTS 1750	RMC	21.0	20.05	-0.05	10 mm	5621B	N/A	1:1	bottom	0.549	1.245	0.684	
1732.40	1412	UMTS 1750	RMC	21.0	19.94	-0.08	10 mm	5621B	N/A	1:1	bottom	0.628	1.276	0.801	
1752.60	1513	UMTS 1750	RMC	21.0	19.86	-0.04	10 mm	5621B	N/A	1:1	bottom	0.630	1.300	0.819	A23
1732.40	1412	UMTS 1750	RMC	21.0	19.94	0.10	10 mm	5621B	N/A	1:1	right	0.051	1.276	0.065	
1732.40	1412	UMTS 1750	RMC	21.0	19.94	0.11	10 mm	5621B	N/A	1:1	left	0.045	1.276	0.057	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	-0.04	10 mm	5656B	N/A	1:1	back	0.213	1.156	0.246	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	-0.10	10 mm	5656B	N/A	1:1	front	0.198	1.156	0.229	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	-0.04	10 mm	5656B	N/A	1:1	bottom	0.460	1.156	0.532	A25
1852.40	9262	UMTS 1900	RMC	21.0	20.37	0.04	10 mm	5656B	N/A	1:1	right	0.044	1.156	0.051	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	0.07	10 mm	5656B	N/A	1:1	left	0.023	1.156	0.027	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 80 of 114	

**Table 11-23  
LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
707.50	23095	Mid	LTE Band 12	10	24.5	23.96	-0.02	0	5655B	QPSK	1	0	10 mm	back	1:1	0.147	1.132	0.166	
707.50	23095	Mid	LTE Band 12	10	23.5	22.93	-0.02	1	5655B	QPSK	25	0	10 mm	back	1:1	0.124	1.140	0.141	
707.50	23095	Mid	LTE Band 12	10	24.5	23.96	-0.08	0	5655B	QPSK	1	0	10 mm	front	1:1	0.113	1.132	0.128	
707.50	23095	Mid	LTE Band 12	10	23.5	22.93	0.00	1	5655B	QPSK	25	0	10 mm	front	1:1	0.095	1.140	0.108	
707.50	23095	Mid	LTE Band 12	10	24.5	23.96	0.01	0	5655B	QPSK	1	0	10 mm	bottom	1:1	0.081	1.132	0.092	
707.50	23095	Mid	LTE Band 12	10	23.5	22.93	-0.04	1	5655B	QPSK	25	0	10 mm	bottom	1:1	0.066	1.140	0.075	
707.50	23095	Mid	LTE Band 12	10	24.5	23.96	0.03	0	5655B	QPSK	1	0	10 mm	right	1:1	0.157	1.132	0.178	A27
707.50	23095	Mid	LTE Band 12	10	23.5	22.93	0.02	1	5655B	QPSK	25	0	10 mm	right	1:1	0.123	1.140	0.140	
707.50	23095	Mid	LTE Band 12	10	24.5	23.96	0.00	0	5655B	QPSK	1	0	10 mm	left	1:1	0.103	1.132	0.117	
707.50	23095	Mid	LTE Band 12	10	23.5	22.93	0.00	1	5655B	QPSK	25	0	10 mm	left	1:1	0.078	1.140	0.089	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-24  
LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.14	0	8963B	QPSK	1	0	10 mm	back	1:1	0.233	1.303	0.304	A29
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.01	1	8963B	QPSK	25	0	10 mm	back	1:1	0.190	1.291	0.245	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	-0.03	0	8963B	QPSK	1	0	10 mm	front	1:1	0.190	1.303	0.248	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	-0.04	1	8963B	QPSK	25	0	10 mm	front	1:1	0.156	1.291	0.201	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.01	0	8963B	QPSK	1	0	10 mm	bottom	1:1	0.141	1.303	0.184	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.02	1	8963B	QPSK	25	0	10 mm	bottom	1:1	0.116	1.291	0.150	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.06	0	8963B	QPSK	1	0	10 mm	right	1:1	0.111	1.303	0.145	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	0.00	1	8963B	QPSK	25	0	10 mm	right	1:1	0.096	1.291	0.124	
782.00	23230	Mid	LTE Band 13	10	24.5	23.35	0.03	0	8963B	QPSK	1	0	10 mm	left	1:1	0.064	1.303	0.083	
782.00	23230	Mid	LTE Band 13	10	23.5	22.39	-0.05	1	8963B	QPSK	25	0	10 mm	left	1:1	0.056	1.291	0.072	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-25  
LTE Band 26 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.01	0	9225B	QPSK	1	0	10 mm	back	1:1	0.304	1.104	0.336	A31
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	-0.01	1	9225B	QPSK	36	0	10 mm	back	1:1	0.249	1.094	0.272	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.00	0	9225B	QPSK	1	0	10 mm	front	1:1	0.249	1.104	0.275	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	-0.01	1	9225B	QPSK	36	0	10 mm	front	1:1	0.205	1.094	0.224	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.01	0	9225B	QPSK	1	0	10 mm	bottom	1:1	0.205	1.104	0.226	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	-0.03	1	9225B	QPSK	36	0	10 mm	bottom	1:1	0.162	1.094	0.177	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.03	0	9225B	QPSK	1	0	10 mm	right	1:1	0.101	1.104	0.112	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.04	1	9225B	QPSK	36	0	10 mm	right	1:1	0.080	1.094	0.088	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.07	0.07	0	9225B	QPSK	1	0	10 mm	left	1:1	0.059	1.104	0.065	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.13	1	9225B	QPSK	36	0	10 mm	left	1:1	0.049	1.094	0.054	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 81 of 114	

**Table 11-26**  
**LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Ant State	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.05	0	9225B	QPSK	1	0	10 mm	back	1:1	0.317	1.346	0.427	A33
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.03	1	9225B	QPSK	25	0	10 mm	back	1:1	0.257	1.343	0.345	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.01	0	9225B	QPSK	1	0	10 mm	front	1:1	0.249	1.346	0.335	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.02	1	9225B	QPSK	25	0	10 mm	front	1:1	0.199	1.343	0.267	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.00	0	9225B	QPSK	1	0	10 mm	bottom	1:1	0.222	1.346	0.299	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	-0.07	1	9225B	QPSK	25	0	10 mm	bottom	1:1	0.174	1.343	0.234	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.05	0	9225B	QPSK	1	0	10 mm	right	1:1	0.103	1.346	0.139	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.03	1	9225B	QPSK	25	0	10 mm	right	1:1	0.086	1.343	0.115	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	25.0	23.71	0.14	0	9225B	QPSK	1	0	10 mm	left	1:1	0.055	1.346	0.074	
836.50	20525	Mid	LTE Band 5 (Cell)	10	1	24.0	22.72	0.10	1	9225B	QPSK	25	0	10 mm	left	1:1	0.044	1.343	0.059	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-27**  
**LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	0.01	0	5584B	QPSK	1	0	10 mm	back	1:1	0.212	1.312	0.278	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	0.01	0	5584B	QPSK	50	0	10 mm	back	1:1	0.224	1.327	0.297	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	0.12	0	5584B	QPSK	1	0	10 mm	front	1:1	0.161	1.312	0.211	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	0.04	0	5584B	QPSK	50	0	10 mm	front	1:1	0.172	1.327	0.228	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	0.00	0	5584B	QPSK	1	0	10 mm	bottom	1:1	0.404	1.312	0.530	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	-0.02	0	5584B	QPSK	50	0	10 mm	bottom	1:1	0.440	1.327	0.584	A35
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	-0.02	0	5584B	QPSK	1	0	10 mm	right	1:1	0.034	1.312	0.045	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	0.01	0	5584B	QPSK	50	0	10 mm	right	1:1	0.037	1.327	0.049	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	-0.09	0	5584B	QPSK	1	0	10 mm	left	1:1	0.030	1.312	0.039	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	0.00	0	5584B	QPSK	50	0	10 mm	left	1:1	0.033	1.327	0.044	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 82 of 114	

**Table 11-28  
LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	-0.02	0	5656B	QPSK	1	0	10 mm	back	1:1	0.260	1.230	0.320	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	0.03	0	5656B	QPSK	50	0	10 mm	back	1:1	0.257	1.247	0.320	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	-0.06	0	5656B	QPSK	1	0	10 mm	front	1:1	0.252	1.230	0.310	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	-0.10	0	5656B	QPSK	50	0	10 mm	front	1:1	0.253	1.247	0.315	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	-0.03	0	5656B	QPSK	1	0	10 mm	bottom	1:1	0.556	1.230	0.684	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	-0.01	0	5656B	QPSK	50	0	10 mm	bottom	1:1	0.564	1.247	0.703	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	21.5	20.18	0.05	0	5656B	QPSK	50	0	10 mm	bottom	1:1	0.683	1.355	0.925	
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	20.31	-0.12	0	5656B	QPSK	50	0	10 mm	bottom	1:1	0.739	1.315	0.972	A37
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.48	-0.06	0	5656B	QPSK	100	0	10 mm	bottom	1:1	0.573	1.265	0.725	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	0.04	0	5656B	QPSK	1	0	10 mm	right	1:1	0.048	1.230	0.059	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	-0.05	0	5656B	QPSK	50	0	10 mm	right	1:1	0.052	1.247	0.065	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	-0.10	0	5656B	QPSK	1	0	10 mm	left	1:1	0.025	1.230	0.031	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	-0.07	0	5656B	QPSK	50	0	10 mm	left	1:1	0.025	1.247	0.031	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-29  
LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2680.00	41490	High	LTE Band 41	20	22.0	21.88	0.13	0	5621B	QPSK	1	0	10 mm	back	1:1.58	0.093	1.028	0.096	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	-0.02	0	5621B	QPSK	50	0	10 mm	back	1:1.58	0.099	1.035	0.102	
2680.00	41490	High	LTE Band 41	20	22.0	21.88	0.14	0	5621B	QPSK	1	0	10 mm	front	1:1.58	0.074	1.028	0.076	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	0.17	0	5621B	QPSK	50	0	10 mm	front	1:1.58	0.079	1.035	0.082	
2680.00	41490	High	LTE Band 41	20	22.0	21.88	-0.21	0	5621B	QPSK	1	0	10 mm	bottom	1:1.58	0.149	1.028	0.153	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	-0.02	0	5621B	QPSK	50	0	10 mm	bottom	1:1.58	0.162	1.035	0.168	A39
2680.00	41490	High	LTE Band 41	20	22.0	21.88	0.05	0	5621B	QPSK	1	0	10 mm	left	1:1.58	0.095	1.028	0.098	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	-0.05	0	5621B	QPSK	50	0	10 mm	left	1:1.58	0.084	1.035	0.087	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 83 of 114	

**Table 11-30  
WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan [W/kg]	SAR (1g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) [W/kg]	Plot #
MHz	Ch.																		
2437	6	802.11b	DSSS	22	19.0	18.79	-0.10	10 mm	1	9215B	1	back	99.9	0.183	-	1.050	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.79	0.21	10 mm	1	9215B	1	front	99.9	0.205	-	1.050	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.79	0.12	10 mm	1	9215B	1	top	99.9	0.200	-	1.050	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.79	0.06	10 mm	1	9215B	1	left	99.9	0.278	0.229	1.050	1.001	0.241	A41
2437	6	802.11b	DSSS	22	19.0	18.99	0.12	10 mm	2	9215B	1	back	99.8	0.174	0.146	1.002	1.002	0.147	
2437	6	802.11b	DSSS	22	19.0	18.99	0.19	10 mm	2	9215B	1	front	99.8	0.006	-	1.002	1.002	-	
2437	6	802.11b	DSSS	22	19.0	18.99	0.15	10 mm	2	9215B	1	top	99.8	0.025	-	1.002	1.002	-	
2437	6	802.11b	DSSS	22	19.0	18.99	0.17	10 mm	2	9215B	1	left	99.8	0.023	-	1.002	1.002	-	
5745	149	802.11a	OFDM	20	18.0	17.63	-0.09	10 mm	1	8968B	6	back	98.8	0.587	0.280	1.089	1.012	0.309	
5745	149	802.11a	OFDM	20	18.0	17.63	-0.19	10 mm	1	8968B	6	front	98.8	0.161	-	1.089	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.63	0.15	10 mm	1	8968B	6	top	98.8	0.433	-	1.089	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.63	-0.21	10 mm	1	8968B	6	left	98.8	0.453	-	1.089	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.95	-0.08	10 mm	2	8968B	6	back	98.8	0.789	0.338	1.012	1.012	0.346	A43
5745	149	802.11a	OFDM	20	18.0	17.95	0.18	10 mm	2	8968B	6	front	98.8	0.056	-	1.012	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.95	0.21	10 mm	2	8968B	6	top	98.8	0.103	-	1.012	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.95	0.18	10 mm	2	8968B	6	left	98.8	0.415	-	1.012	1.012	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-31  
DSS Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g) [W/kg]	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) [W/kg]	Plot #		
MHz	Ch.																	
2441	39	Bluetooth	FHSS	16.0	15.93	0.02	10 mm	8969B	1	back	77.6	0.036	1.016	1.289	0.047			
2441	39	Bluetooth	FHSS	16.0	15.93	-0.01	10 mm	8969B	1	front	77.6	0.042	1.016	1.289	0.055			
2441	39	Bluetooth	FHSS	16.0	15.93	0.01	10 mm	8969B	1	top	77.6	0.041	1.016	1.289	0.054			
2441	39	Bluetooth	FHSS	16.0	15.93	-0.02	10 mm	8969B	1	left	77.6	0.060	1.016	1.289	0.079	A45		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 84 of 114	

# 11.4 Standalone Phablet SAR Data

**Table 11-32  
UMTS Phablet SAR Data**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.02	7 mm	9225B	1:1	back	0.272	1.151	0.313	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.01	5 mm	9225B	1:1	front	0.330	1.151	0.380	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.04	11 mm	9225B	1:1	bottom	0.092	1.151	0.106	
836.60	4183	UMTS 850	RMC	24.0	23.39	-0.09	0 mm	9225B	1:1	right	0.131	1.151	0.151	
836.60	4183	UMTS 850	RMC	24.0	23.39	0.10	0 mm	9225B	1:1	left	0.077	1.151	0.089	
836.60	4183	UMTS 850	RMC	21.0	20.36	0.09	0 mm	5584B	1:1	back	0.477	1.159	0.553	
836.60	4183	UMTS 850	RMC	21.0	20.36	-0.05	0 mm	5584B	1:1	front	0.478	1.159	0.554	A46
836.60	4183	UMTS 850	RMC	21.0	20.36	-0.06	0 mm	5584B	1:1	bottom	0.200	1.159	0.232	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.03	7 mm	6428B	1:1	back	0.544	1.279	0.696	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	0.05	5 mm	6428B	1:1	front	0.583	1.279	0.746	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.01	11 mm	6428B	1:1	bottom	0.456	1.279	0.583	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	0.03	0 mm	6428B	1:1	right	0.221	1.279	0.283	
1732.40	1412	UMTS 1750	RMC	24.0	22.93	-0.17	0 mm	6428B	1:1	left	0.171	1.279	0.219	
1732.40	1412	UMTS 1750	RMC	21.0	19.94	-0.06	0 mm	6428B	1:1	back	0.994	1.276	1.268	
1732.40	1412	UMTS 1750	RMC	21.0	19.94	-0.09	0 mm	6428B	1:1	front	0.755	1.276	0.963	
1712.40	1312	UMTS 1750	RMC	21.0	20.05	0.00	0 mm	6428B	1:1	bottom	1.520	1.245	1.892	A47
1732.40	1412	UMTS 1750	RMC	21.0	19.94	0.00	0 mm	6428B	1:1	bottom	1.490	1.276	1.901	
1752.60	1513	UMTS 1750	RMC	21.0	19.86	0.00	0 mm	6428B	1:1	bottom	1.490	1.300	1.937	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.03	7 mm	5656B	1:1	back	0.353	1.112	0.393	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	-0.01	5 mm	5656B	1:1	front	0.440	1.112	0.489	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.03	11 mm	5656B	1:1	bottom	0.418	1.112	0.465	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.01	0 mm	5656B	1:1	right	0.220	1.112	0.245	
1852.40	9262	UMTS 1900	RMC	24.0	23.54	0.00	0 mm	5656B	1:1	left	0.131	1.112	0.146	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	0.09	0 mm	5656B	1:1	back	0.899	1.156	1.039	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	-0.03	0 mm	5656B	1:1	front	0.727	1.156	0.840	
1852.40	9262	UMTS 1900	RMC	21.0	20.37	-0.08	0 mm	5656B	1:1	bottom	1.210	1.156	1.399	A48
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 85 of 114	

**Table 11-33  
LTE Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Ch.	Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR	Plot #
[MHz]																(W/kg)		(W/kg)	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	-0.03	0	5584B	QPSK	1	99	7 mm	back	1:1	0.420	1.349	0.567	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	-0.02	1	5584B	QPSK	50	50	7 mm	back	1:1	0.343	1.361	0.467	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	-0.05	0	5584B	QPSK	1	99	5 mm	front	1:1	0.399	1.349	0.538	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	-0.06	1	5584B	QPSK	50	50	5 mm	front	1:1	0.328	1.361	0.446	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	-0.02	0	5584B	QPSK	1	99	11 mm	bottom	1:1	0.392	1.349	0.529	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	-0.03	1	5584B	QPSK	50	50	11 mm	bottom	1:1	0.332	1.361	0.452	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	0.07	0	5584B	QPSK	1	99	0 mm	right	1:1	0.176	1.349	0.237	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	0.00	1	5584B	QPSK	50	50	0 mm	right	1:1	0.147	1.361	0.200	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	23.20	-0.12	0	5584B	QPSK	1	99	0 mm	left	1:1	0.155	1.349	0.209	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	22.16	-0.16	1	5584B	QPSK	50	50	0 mm	left	1:1	0.119	1.361	0.162	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	-0.08	0	5584B	QPSK	1	0	0 mm	back	1:1	0.819	1.312	1.075	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	-0.07	0	5584B	QPSK	50	0	0 mm	back	1:1	0.819	1.327	1.087	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	0.06	0	5584B	QPSK	1	0	0 mm	front	1:1	0.526	1.312	0.690	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	0.07	0	5584B	QPSK	50	0	0 mm	front	1:1	0.524	1.327	0.695	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.32	-0.01	0	5584B	QPSK	1	0	0 mm	bottom	1:1	1.390	1.312	1.624	
1720.00	132072	Low	LTE Band 66 (AWS)	20	21.5	20.26	-0.03	0	5584B	QPSK	50	0	0 mm	bottom	1:1	1.500	1.330	1.954	A49
1745.00	132322	Mid	LTE Band 66 (AWS)	20	21.5	20.15	-0.02	0	5584B	QPSK	50	0	0 mm	bottom	1:1	1.400	1.365	1.911	
1770.00	132572	High	LTE Band 66 (AWS)	20	21.5	20.27	0.00	0	5584B	QPSK	50	0	0 mm	bottom	1:1	1.390	1.327	1.845	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	0.02	0	5656B	QPSK	1	50	7 mm	back	1:1	0.412	1.282	0.528	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.06	1	5656B	QPSK	50	0	7 mm	back	1:1	0.351	1.312	0.461	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	-0.15	0	5656B	QPSK	1	50	5 mm	front	1:1	0.586	1.282	0.751	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	-0.12	1	5656B	QPSK	50	0	5 mm	front	1:1	0.504	1.312	0.661	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	-0.04	0	5656B	QPSK	1	50	11 mm	bottom	1:1	0.460	1.282	0.590	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.00	1	5656B	QPSK	50	0	11 mm	bottom	1:1	0.409	1.312	0.537	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	-0.03	0	5656B	QPSK	1	50	0 mm	right	1:1	0.230	1.282	0.295	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	0.02	1	5656B	QPSK	50	0	0 mm	right	1:1	0.206	1.312	0.270	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	23.42	-0.12	0	5656B	QPSK	1	50	0 mm	left	1:1	0.130	1.282	0.167	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	22.32	-0.17	1	5656B	QPSK	50	0	0 mm	left	1:1	0.108	1.312	0.142	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	0.12	0	5656B	QPSK	1	0	0 mm	back	1:1	1.160	1.230	1.427	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	0.14	0	5656B	QPSK	50	0	0 mm	back	1:1	1.160	1.247	1.447	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	-0.16	0	5656B	QPSK	1	0	0 mm	front	1:1	0.824	1.230	1.014	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	-0.18	0	5656B	QPSK	50	0	0 mm	front	1:1	0.840	1.247	1.047	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.60	-0.07	0	5656B	QPSK	1	0	0 mm	bottom	1:1	1.360	1.230	1.673	
1860.00	26140	Low	LTE Band 25 (PCS)	20	21.5	20.54	-0.08	0	5656B	QPSK	50	0	0 mm	bottom	1:1	1.360	1.247	1.696	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	21.5	20.18	-0.10	0	5656B	QPSK	50	0	0 mm	bottom	1:1	1.420	1.355	1.924	A50
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	20.31	-0.07	0	5656B	QPSK	50	0	0 mm	bottom	1:1	1.320	1.315	1.736	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	-0.12	0	9216B	QPSK	1	0	7 mm	back	1:1.58	0.106	1.084	0.115	
2680.00	41490	High	LTE Band 41	20	24.0	23.69	-0.08	1	9216B	QPSK	50	0	7 mm	back	1:1.58	0.093	1.074	0.100	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	0.12	0	9216B	QPSK	1	0	5 mm	front	1:1.58	0.175	1.084	0.190	
2680.00	41490	High	LTE Band 41	20	24.0	23.69	0.14	1	9216B	QPSK	50	0	5 mm	front	1:1.58	0.156	1.074	0.168	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	0.00	0	9216B	QPSK	1	0	11 mm	bottom	1:1.58	0.068	1.084	0.074	
2690.00	41490	High	LTE Band 41	20	24.0	23.69	0.04	1	9216B	QPSK	50	0	11 mm	bottom	1:1.58	0.061	1.074	0.066	
2680.00	41490	High	LTE Band 41	20	25.0	24.65	-0.07	0	9216B	QPSK	1	0	0 mm	left	1:1.58	0.277	1.084	0.300	
2680.00	41490	High	LTE Band 41	20	24.0	23.69	-0.11	1	9216B	QPSK	50	0	0 mm	left	1:1.58	0.250	1.074	0.269	
2680.00	41490	High	LTE Band 41	20	22.0	21.88	-0.16	0	5621B	QPSK	1	0	0 mm	back	1:1.58	0.584	1.028	0.600	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	-0.15	0	5621B	QPSK	50	0	0 mm	back	1:1.58	0.634	1.035	0.656	
2680.00	41490	High	LTE Band 41	20	22.0	21.88	-0.19	0	5621B	QPSK	1	0	0 mm	front	1:1.58	0.467	1.028	0.480	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	-0.18	0	5621B	QPSK	50	0	0 mm	front	1:1.58	0.500	1.035	0.518	
2680.00	41490	High	LTE Band 41	20	22.0	21.88	-0.06	0	5621B	QPSK	1	0	0 mm	bottom	1:1.58	0.638	1.028	0.656	
2680.00	41490	High	LTE Band 41	20	22.0	21.85	-0.07	0	5621B	QPSK	50	0	0 mm	bottom	1:1.58	0.690	1.035	0.714	A51
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Phablet 4.0 W/kg (mW/g) averaged over 10 grams									

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 86 of 114

**Table 11-34  
WLAN Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan [W/kg]	SAR (10g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g) [W/kg]	Plot #
MHz	Ch.																		
5280	56	802.11a	OFDM	20	18.0	17.82	0.19	0 mm	1	8968B	6	back	98.8	8.623	1.140	1.042	1.012	1.202	
5280	56	802.11a	OFDM	20	18.0	17.82	0.00	0 mm	1	8968B	6	front	98.8	2.382	-	1.042	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.82	0.02	0 mm	1	8968B	6	top	98.8	3.884	-	1.042	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.82	0.18	0 mm	1	8968B	6	left	98.8	5.338	0.354	1.042	1.012	0.373	
5280	56	802.11a	OFDM	20	18.0	17.89	0.13	0 mm	2	8968B	6	back	98.8	2.784	0.570	1.026	1.012	0.592	
5280	56	802.11a	OFDM	20	18.0	17.89	0.19	0 mm	2	8968B	6	front	98.8	0.315	-	1.026	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.89	0.14	0 mm	2	8968B	6	top	98.8	1.202	-	1.026	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.89	-0.17	0 mm	2	8968B	6	left	98.8	1.091	-	1.026	1.012	-	
5600	120	802.11a	OFDM	20	18.0	17.78	0.21	0 mm	1	8968B	6	back	98.8	11.542	1.220	1.052	1.012	1.299	A52
5600	120	802.11a	OFDM	20	18.0	17.78	0.19	0 mm	1	8968B	6	front	98.8	1.491	-	1.052	1.012	-	
5600	120	802.11a	OFDM	20	18.0	17.78	0.13	0 mm	1	8968B	6	top	98.8	3.966	-	1.052	1.012	-	
5600	120	802.11a	OFDM	20	18.0	17.78	0.16	0 mm	1	8968B	6	left	98.8	6.315	0.472	1.052	1.012	0.503	
5720	144	802.11a	OFDM	20	18.0	17.99	-0.03	0 mm	2	8968B	6	back	98.8	9.773	1.090	1.002	1.012	1.105	
5720	144	802.11a	OFDM	20	18.0	17.99	0.00	0 mm	2	8968B	6	front	98.8	0.750	-	1.002	1.012	-	
5720	144	802.11a	OFDM	20	18.0	17.99	-0.11	0 mm	2	8968B	6	top	98.8	0.907	-	1.002	1.012	-	
5720	144	802.11a	OFDM	20	18.0	17.99	-0.11	0 mm	2	8968B	6	left	98.8	2.446	0.323	1.002	1.012	0.328	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

## 11.5 SAR Test Notes

### General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg.
- This device supports dynamic antenna tuning for LTE Band 5. Per FCC Guidance, SAR was measured according to the normally required SAR measurement configurations with tuner active. The auto-tune

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 87 of 114	

state determined by the device was verified before and after each SAR measurement and is listed in tables above. Please see Section 14 for supplemental data.

12. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
13. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
14. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

**GSM Test Notes:**

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

**UMTS Notes:**

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

**LTE Notes:**

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was  $> 0.6$  W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 88 of 114	

WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.6.6 for more information.
4. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
7. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.5 for the time domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT BR tethering applications.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 89 of 114	

## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB Publication 248227, the worst case WLAN SAR result for the applicable exposure condition was used for simultaneous transmission analysis.

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 90 of 114

## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.149	0.728	0.009	0.877	0.158	<b>0.886</b>
	GSM 1900	0.044	0.728	0.009	0.772	0.053	0.781
	UMTS 850	0.107	0.728	0.009	0.835	0.116	0.844
	UMTS 1750	0.074	0.728	0.009	0.802	0.083	0.811
	UMTS 1900	0.057	0.728	0.009	0.785	0.066	0.794
	LTE Band 12	0.093	0.728	0.009	0.821	0.102	0.830
	LTE Band 13	0.083	0.728	0.009	0.811	0.092	0.820
	LTE Band 26 (Cell)	0.125	0.728	0.009	0.853	0.134	0.862
	LTE Band 5 (Cell)	0.148	0.728	0.009	0.876	0.157	0.885
	LTE Band 66 (AWS)	0.080	0.728	0.009	0.808	0.089	0.817
	LTE Band 25 (PCS)	0.083	0.728	0.009	0.811	0.092	0.820
	LTE Band 41	0.028	0.728	0.009	0.756	0.037	0.765

**Table 12-2**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.149	0.254	0.221	0.403	0.370	<b>0.624</b>
	GSM 1900	0.044	0.254	0.221	0.298	0.265	0.519
	UMTS 850	0.107	0.254	0.221	0.361	0.328	0.582
	UMTS 1750	0.074	0.254	0.221	0.328	0.295	0.549
	UMTS 1900	0.057	0.254	0.221	0.311	0.278	0.532
	LTE Band 12	0.093	0.254	0.221	0.347	0.314	0.568
	LTE Band 13	0.083	0.254	0.221	0.337	0.304	0.558
	LTE Band 26 (Cell)	0.125	0.254	0.221	0.379	0.346	0.600
	LTE Band 5 (Cell)	0.148	0.254	0.221	0.402	0.369	0.623
	LTE Band 66 (AWS)	0.080	0.254	0.221	0.334	0.301	0.555
	LTE Band 25 (PCS)	0.083	0.254	0.221	0.337	0.304	0.558
	LTE Band 41	0.028	0.254	0.221	0.282	0.249	0.503

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 91 of 114	

**Table 12-3**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO and 5 GHz WLAN MIMO (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Head SAR	GSM 850	0.149	0.728	0.009	0.254	0.221	<b>1.361</b>
	GSM 1900	0.044	0.728	0.009	0.254	0.221	1.256
	UMTS 850	0.107	0.728	0.009	0.254	0.221	1.319
	UMTS 1750	0.074	0.728	0.009	0.254	0.221	1.286
	UMTS 1900	0.057	0.728	0.009	0.254	0.221	1.269
	LTE Band 12	0.093	0.728	0.009	0.254	0.221	1.305
	LTE Band 13	0.083	0.728	0.009	0.254	0.221	1.295
	LTE Band 26 (Cell)	0.125	0.728	0.009	0.254	0.221	1.337
	LTE Band 5 (Cell)	0.148	0.728	0.009	0.254	0.221	1.360
	LTE Band 66 (AWS)	0.080	0.728	0.009	0.254	0.221	1.292
	LTE Band 25 (PCS)	0.083	0.728	0.009	0.254	0.221	1.295
	LTE Band 41	0.028	0.728	0.009	0.254	0.221	1.240

**Table 12-4**  
**Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.149	1.095	<b>1.244</b>
	GSM 1900	0.044	1.095	1.139
	UMTS 850	0.107	1.095	1.202
	UMTS 1750	0.074	1.095	1.169
	UMTS 1900	0.057	1.095	1.152
	LTE Band 12	0.093	1.095	1.188
	LTE Band 13	0.083	1.095	1.178
	LTE Band 26 (Cell)	0.125	1.095	1.220
	LTE Band 5 (Cell)	0.148	1.095	1.243
	LTE Band 66 (AWS)	0.080	1.095	1.175
	LTE Band 25 (PCS)	0.083	1.095	1.178
	LTE Band 41	0.028	1.095	1.123

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 92 of 114	

**Table 12-5  
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	
Head SAR	GSM 850	0.149	1.095	0.254	<b>1.498</b>
	GSM 1900	0.044	1.095	0.254	1.393
	UMTS 850	0.107	1.095	0.254	1.456
	UMTS 1750	0.074	1.095	0.254	1.423
	UMTS 1900	0.057	1.095	0.254	1.406
	LTE Band 12	0.093	1.095	0.254	1.442
	LTE Band 13	0.083	1.095	0.254	1.432
	LTE Band 26 (Cell)	0.125	1.095	0.254	1.474
	LTE Band 5 (Cell)	0.148	1.095	0.254	1.497
	LTE Band 66 (AWS)	0.080	1.095	0.254	1.429
	LTE Band 25 (PCS)	0.083	1.095	0.254	1.432
	LTE Band 41	0.028	1.095	0.254	1.377
Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	
Head SAR	GSM 850	0.149	1.095	0.221	<b>1.465</b>
	GSM 1900	0.044	1.095	0.221	1.360
	UMTS 850	0.107	1.095	0.221	1.423
	UMTS 1750	0.074	1.095	0.221	1.390
	UMTS 1900	0.057	1.095	0.221	1.373
	LTE Band 12	0.093	1.095	0.221	1.409
	LTE Band 13	0.083	1.095	0.221	1.399
	LTE Band 26 (Cell)	0.125	1.095	0.221	1.441
	LTE Band 5 (Cell)	0.148	1.095	0.221	1.464
	LTE Band 66 (AWS)	0.080	1.095	0.221	1.396
	LTE Band 25 (PCS)	0.083	1.095	0.221	1.399
	LTE Band 41	0.028	1.095	0.221	1.344

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 93 of 114

**Table 12-6  
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN MIMO (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM 850	0.149	1.095	0.331	<b>1.575</b>
	GSM 1900	0.044	1.095	0.331	1.470
	UMTS 850	0.107	1.095	0.331	1.533
	UMTS 1750	0.074	1.095	0.331	1.500
	UMTS 1900	0.057	1.095	0.331	1.483
	LTE Band 12	0.093	1.095	0.331	1.519
	LTE Band 13	0.083	1.095	0.331	1.509
	LTE Band 26 (Cell)	0.125	1.095	0.331	1.551
	LTE Band 5 (Cell)	0.148	1.095	0.331	1.574
	LTE Band 66 (AWS)	0.080	1.095	0.331	1.506
	LTE Band 25 (PCS)	0.083	1.095	0.331	1.509
	LTE Band 41	0.028	1.095	0.331	1.454

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 94 of 114	

## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-7**  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.142	0.074	0.075	0.216	0.217	0.291
	GSM 1900	0.166	0.074	0.075	0.240	0.241	0.315
	UMTS 850	0.167	0.074	0.075	0.241	0.242	0.316
	UMTS 1750	0.485	0.074	0.075	0.559	0.560	<b>0.634</b>
	UMTS 1900	0.227	0.074	0.075	0.301	0.302	0.376
	LTE Band 12	0.130	0.074	0.075	0.204	0.205	0.279
	LTE Band 13	0.149	0.074	0.075	0.223	0.224	0.298
	LTE Band 26 (Cell)	0.149	0.074	0.075	0.223	0.224	0.298
	LTE Band 5 (Cell)	0.202	0.074	0.075	0.276	0.277	0.351
	LTE Band 66 (AWS)	0.252	0.074	0.075	0.326	0.327	0.401
	LTE Band 25 (PCS)	0.309	0.074	0.075	0.383	0.384	0.458
	LTE Band 41	0.103	0.074	0.075	0.177	0.178	0.252

**Table 12-8**  
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.142	0.228	0.248	0.370	0.390	0.618
	GSM 1900	0.166	0.228	0.248	0.394	0.414	0.642
	UMTS 850	0.167	0.228	0.248	0.395	0.415	0.643
	UMTS 1750	0.485	0.228	0.248	0.713	0.733	<b>0.961</b>
	UMTS 1900	0.227	0.228	0.248	0.455	0.475	0.703
	LTE Band 12	0.130	0.228	0.248	0.358	0.378	0.606
	LTE Band 13	0.149	0.228	0.248	0.377	0.397	0.625
	LTE Band 26 (Cell)	0.149	0.228	0.248	0.377	0.397	0.625
	LTE Band 5 (Cell)	0.202	0.228	0.248	0.430	0.450	0.678
	LTE Band 66 (AWS)	0.252	0.228	0.248	0.480	0.500	0.728
	LTE Band 25 (PCS)	0.309	0.228	0.248	0.537	0.557	0.785
	LTE Band 41	0.103	0.228	0.248	0.331	0.351	0.579

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 95 of 114

**Table 12-9**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO and 5 GHz WLAN MIMO (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Body-Worn	GSM 850	0.142	0.074	0.075	0.228	0.248	0.767
	GSM 1900	0.166	0.074	0.075	0.228	0.248	0.791
	UMTS 850	0.167	0.074	0.075	0.228	0.248	0.792
	UMTS 1750	0.485	0.074	0.075	0.228	0.248	<b>1.110</b>
	UMTS 1900	0.227	0.074	0.075	0.228	0.248	0.852
	LTE Band 12	0.130	0.074	0.075	0.228	0.248	0.755
	LTE Band 13	0.149	0.074	0.075	0.228	0.248	0.774
	LTE Band 26 (Cell)	0.149	0.074	0.075	0.228	0.248	0.774
	LTE Band 5 (Cell)	0.202	0.074	0.075	0.228	0.248	0.827
	LTE Band 66 (AWS)	0.252	0.074	0.075	0.228	0.248	0.877
	LTE Band 25 (PCS)	0.309	0.074	0.075	0.228	0.248	0.934
	LTE Band 41	0.103	0.074	0.075	0.228	0.248	0.728

**Table 12-10**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.142	0.024	0.166
	GSM 1900	0.166	0.024	0.190
	UMTS 850	0.167	0.024	0.191
	UMTS 1750	0.485	0.024	<b>0.509</b>
	UMTS 1900	0.227	0.024	0.251
	LTE Band 12	0.130	0.024	0.154
	LTE Band 13	0.149	0.024	0.173
	LTE Band 26 (Cell)	0.149	0.024	0.173
	LTE Band 5 (Cell)	0.202	0.024	0.226
	LTE Band 66 (AWS)	0.252	0.024	0.276
	LTE Band 25 (PCS)	0.309	0.024	0.333
	LTE Band 41	0.103	0.024	0.127

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 96 of 114	

**Table 12-11**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.142	0.024	0.228	0.394
	GSM 1900	0.166	0.024	0.228	0.418
	UMTS 850	0.167	0.024	0.228	0.419
	UMTS 1750	0.485	0.024	0.228	<b>0.737</b>
	UMTS 1900	0.227	0.024	0.228	0.479
	LTE Band 12	0.130	0.024	0.228	0.382
	LTE Band 13	0.149	0.024	0.228	0.401
	LTE Band 26 (Cell)	0.149	0.024	0.228	0.401
	LTE Band 5 (Cell)	0.202	0.024	0.228	0.454
	LTE Band 66 (AWS)	0.252	0.024	0.228	0.504
	LTE Band 25 (PCS)	0.309	0.024	0.228	0.561
	LTE Band 41	0.103	0.024	0.228	0.355
Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.142	0.024	0.248	0.414
	GSM 1900	0.166	0.024	0.248	0.438
	UMTS 850	0.167	0.024	0.248	0.439
	UMTS 1750	0.485	0.024	0.248	<b>0.757</b>
	UMTS 1900	0.227	0.024	0.248	0.499
	LTE Band 12	0.130	0.024	0.248	0.402
	LTE Band 13	0.149	0.024	0.248	0.421
	LTE Band 26 (Cell)	0.149	0.024	0.248	0.421
	LTE Band 5 (Cell)	0.202	0.024	0.248	0.474
	LTE Band 66 (AWS)	0.252	0.024	0.248	0.524
	LTE Band 25 (PCS)	0.309	0.024	0.248	0.581
	LTE Band 41	0.103	0.024	0.248	0.375

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 97 of 114

**Table 12-12**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN MIMO (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Body-Worn	GSM 850	0.142	0.024	0.228	0.248	0.642
	GSM 1900	0.166	0.024	0.228	0.248	0.666
	UMTS 850	0.167	0.024	0.228	0.248	0.667
	UMTS 1750	0.485	0.024	0.228	0.248	<b>0.985</b>
	UMTS 1900	0.227	0.024	0.228	0.248	0.727
	LTE Band 12	0.130	0.024	0.228	0.248	0.630
	LTE Band 13	0.149	0.024	0.228	0.248	0.649
	LTE Band 26 (Cell)	0.149	0.024	0.228	0.248	0.649
	LTE Band 5 (Cell)	0.202	0.024	0.228	0.248	0.702
	LTE Band 66 (AWS)	0.252	0.024	0.228	0.248	0.752
	LTE Band 25 (PCS)	0.309	0.024	0.228	0.248	0.809
	LTE Band 41	0.103	0.024	0.228	0.248	0.603

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 98 of 114	

## 12.5 Hotspot SAR Simultaneous Transmission Analysis

**Table 12-13**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.479	0.241	0.147	0.720	0.626	0.867
	GPRS 1900	1.015	0.241	0.147	1.256	1.162	<b>1.403</b>
	UMTS 850	0.387	0.241	0.147	0.628	0.534	0.775
	UMTS 1750	0.819	0.241	0.147	1.060	0.966	1.207
	UMTS 1900	0.532	0.241	0.147	0.773	0.679	0.920
	LTE Band 12	0.178	0.241	0.147	0.419	0.325	0.566
	LTE Band 13	0.304	0.241	0.147	0.545	0.451	0.692
	LTE Band 26 (Cell)	0.336	0.241	0.147	0.577	0.483	0.724
	LTE Band 5 (Cell)	0.427	0.241	0.147	0.668	0.574	0.815
	LTE Band 66 (AWS)	0.584	0.241	0.147	0.825	0.731	0.972
	LTE Band 25 (PCS)	0.972	0.241	0.147	1.213	1.119	1.360
	LTE Band 41	0.168	0.241	0.147	0.409	0.315	0.556

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 99 of 114

**Table 12-14**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.479	0.309	0.346	0.788	0.825	1.134
	GPRS 1900	1.015	0.309	0.346	1.324	1.361	See Table Below
	UMTS 850	0.387	0.309	0.346	0.696	0.733	1.042
	UMTS 1750	0.819	0.309	0.346	1.128	1.165	<b>1.474</b>
	UMTS 1900	0.532	0.309	0.346	0.841	0.878	1.187
	LTE Band 12	0.178	0.309	0.346	0.487	0.524	0.833
	LTE Band 13	0.304	0.309	0.346	0.613	0.650	0.959
	LTE Band 26 (Cell)	0.336	0.309	0.346	0.645	0.682	0.991
	LTE Band 5 (Cell)	0.427	0.309	0.346	0.736	0.773	1.082
	LTE Band 66 (AWS)	0.584	0.309	0.346	0.893	0.930	1.239
	LTE Band 25 (PCS)	0.972	0.309	0.346	1.281	1.318	See Table Below
	LTE Band 41	0.168	0.309	0.346	0.477	0.514	0.823

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.371	0.309	0.346	<b>1.026</b>	Hotspot SAR	Back	0.320	0.309	0.346	<b>0.975</b>
	Front	0.338	0.309*	0.346*	0.993		Front	0.315	0.309*	0.346*	0.970
	Top	-	0.309*	0.346*	0.655		Top	-	0.309*	0.346*	0.655
	Bottom	1.015	-	-	1.015		Bottom	0.972	-	-	0.972
	Right	0.084	-	-	0.084		Right	0.065	-	-	0.065
	Left	0.041	0.309*	0.346*	0.696		Left	0.031	0.309*	0.346*	0.686

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset		Page 100 of 114

**Table 12-15**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO and 5 GHz WLAN MIMO (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	
Hotspot SAR	GPRS 850	0.479	0.241	0.147	0.309	0.346	1.522
	GPRS 1900	1.015	0.241	0.147	0.309	0.346	See Table Below
	UMTS 850	0.387	0.241	0.147	0.309	0.346	1.430
	UMTS 1750	0.819	0.241	0.147	0.309	0.346	See Table Below
	UMTS 1900	0.532	0.241	0.147	0.309	0.346	<b>1.575</b>
	LTE Band 12	0.178	0.241	0.147	0.309	0.346	1.221
	LTE Band 13	0.304	0.241	0.147	0.309	0.346	1.347
	LTE Band 26 (Cell)	0.336	0.241	0.147	0.309	0.346	1.379
	LTE Band 5 (Cell)	0.427	0.241	0.147	0.309	0.346	1.470
	LTE Band 66 (AWS)	0.584	0.241	0.147	0.309	0.346	See Table Below
	LTE Band 25 (PCS)	0.972	0.241	0.147	0.309	0.346	See Table Below
	LTE Band 41	0.168	0.241	0.147	0.309	0.346	1.211

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Hotspot SAR	Back	0.371	0.241*	0.147	0.309	0.346	1.414
	Front	0.338	0.241*	0.147*	0.309*	0.346*	1.381
	Top	-	0.241*	0.147*	0.309*	0.346*	1.043
	Bottom	1.015	-	-	-	-	1.015
	Right	0.084	-	-	-	-	0.084
	Left	0.041	0.241	0.147*	0.309*	0.346*	1.084
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Hotspot SAR	Back	0.424	0.241*	0.147	0.309	0.346	1.467
	Front	0.330	0.241*	0.147*	0.309*	0.346*	1.373
	Top	-	0.241*	0.147*	0.309*	0.346*	1.043
	Bottom	0.819	-	-	-	-	0.819
	Right	0.065	-	-	-	-	0.065
	Left	0.057	0.241	0.147*	0.309*	0.346*	1.100
Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Hotspot SAR	Back	0.297	0.241*	0.147	0.309	0.346	1.340
	Front	0.228	0.241*	0.147*	0.309*	0.346*	1.271
	Top	-	0.241*	0.147*	0.309*	0.346*	1.043
	Bottom	0.584	-	-	-	-	0.584
	Right	0.049	-	-	-	-	0.049
	Left	0.044	0.241	0.147*	0.309*	0.346*	1.087
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Hotspot SAR	Back	0.320	0.241*	0.147	0.309	0.346	1.363
	Front	0.315	0.241*	0.147*	0.309*	0.346*	1.358
	Top	-	0.241*	0.147*	0.309*	0.346*	1.043
	Bottom	0.972	-	-	-	-	0.972
	Right	0.065	-	-	-	-	0.065
	Left	0.031	0.241	0.147*	0.309*	0.346*	1.074

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 101 of 114	

**Table 12-16**  
**Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.479	0.079	0.558
	GPRS 1900	1.015	0.079	<b>1.094</b>
	UMTS 850	0.387	0.079	0.466
	UMTS 1750	0.819	0.079	0.898
	UMTS 1900	0.532	0.079	0.611
	LTE Band 12	0.178	0.079	0.257
	LTE Band 13	0.304	0.079	0.383
	LTE Band 26 (Cell)	0.336	0.079	0.415
	LTE Band 5 (Cell)	0.427	0.079	0.506
	LTE Band 66 (AWS)	0.584	0.079	0.663
	LTE Band 25 (PCS)	0.972	0.079	1.051
	LTE Band 41	0.168	0.079	0.247

FCC ID: A3LSMG977KOR	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 102 of 114	

**Table 12-17**  
**Simultaneous Transmission Scenario with Bluetooth and 5GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	
Hotspot SAR	GPRS 850	0.479	0.079	0.309	0.867
	GPRS 1900	1.015	0.079	0.309	<b>1.403</b>
	UMTS 850	0.387	0.079	0.309	0.775
	UMTS 1750	0.819	0.079	0.309	1.207
	UMTS 1900	0.532	0.079	0.309	0.920
	LTE Band 12	0.178	0.079	0.309	0.566
	LTE Band 13	0.304	0.079	0.309	0.692
	LTE Band 26 (Cell)	0.336	0.079	0.309	0.724
	LTE Band 5 (Cell)	0.427	0.079	0.309	0.815
	LTE Band 66 (AWS)	0.584	0.079	0.309	0.972
	LTE Band 25 (PCS)	0.972	0.079	0.309	1.360
	LTE Band 41	0.168	0.079	0.309	0.556
Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	
Hotspot SAR	GPRS 850	0.479	0.079	0.346	0.904
	GPRS 1900	1.015	0.079	0.346	<b>1.440</b>
	UMTS 850	0.387	0.079	0.346	0.812
	UMTS 1750	0.819	0.079	0.346	1.244
	UMTS 1900	0.532	0.079	0.346	0.957
	LTE Band 12	0.178	0.079	0.346	0.603
	LTE Band 13	0.304	0.079	0.346	0.729
	LTE Band 26 (Cell)	0.336	0.079	0.346	0.761
	LTE Band 5 (Cell)	0.427	0.079	0.346	0.852
	LTE Band 66 (AWS)	0.584	0.079	0.346	1.009
	LTE Band 25 (PCS)	0.972	0.079	0.346	1.397
	LTE Band 41	0.168	0.079	0.346	0.593

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 103 of 114

**Table 12-18**

**Simultaneous Transmission Scenario with Bluetooth and 5GHz WLAN MIMO (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	GPRS 850	0.479	0.079	0.309	0.346	1.213
	GPRS 1900	1.015	0.079	0.309	0.346	See Table Below
	UMTS 850	0.387	0.079	0.309	0.346	1.121
	UMTS 1750	0.819	0.079	0.309	0.346	<b>1.553</b>
	UMTS 1900	0.532	0.079	0.309	0.346	1.266
	LTE Band 12	0.178	0.079	0.309	0.346	0.912
	LTE Band 13	0.304	0.079	0.309	0.346	1.038
	LTE Band 26 (Cell)	0.336	0.079	0.309	0.346	1.070
	LTE Band 5 (Cell)	0.427	0.079	0.309	0.346	1.161
	LTE Band 66 (AWS)	0.584	0.079	0.309	0.346	1.318
	LTE Band 25 (PCS)	0.972	0.079	0.309	0.346	See Table Below
	LTE Band 41	0.168	0.079	0.309	0.346	0.902

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	Back	0.371	0.047	0.309	0.346	<b>1.073</b>
	Front	0.338	0.055	0.309*	0.346*	1.048
	Top	-	0.054	0.309*	0.346*	0.709
	Bottom	1.015	-	-	-	1.015
	Right	0.084	-	-	-	0.084
	Left	0.041	0.079	0.309*	0.346*	0.775
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	Back	0.320	0.047	0.309	0.346	1.022
	Front	0.315	0.055	0.309*	0.346*	<b>1.025</b>
	Top	-	0.054	0.309*	0.346*	0.709
	Bottom	0.972	-	-	-	0.972
	Right	0.065	-	-	-	0.065
	Left	0.031	0.079	0.309*	0.346*	0.765

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 104 of 114	

## 12.6 Phablet Simultaneous Transmission Analysis

For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

**Table 12-19**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)**

Exposure Condition	Mode	3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Phablet SAR	UMTS 850	0.554	1.299	1.105	1.853	1.659	2.958
	UMTS 1750	1.937	1.299	1.105	3.236	3.042	See Table Below
	UMTS 1900	1.399	1.299	1.105	2.698	2.504	<b>3.803</b>
	LTE Band 66 (AWS)	1.995	1.299	1.105	3.294	3.100	See Table Below
	LTE Band 25 (PCS)	1.924	1.299	1.105	3.223	3.029	See Table Below
	LTE Band 41	0.714	1.299	1.105	2.013	1.819	3.118

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Phablet SAR	Back	1.268	1.299	1.105	2.567	2.373	<b>3.672</b>
	Front	0.963	1.299*	1.105*	2.262	2.068	3.367
	Top	-	1.299*	1.105*	1.299	1.105	2.404
	Bottom	1.937	-	-	1.937	1.937	1.937
	Right	0.283	-	-	0.283	0.283	0.283
	Left	0.219	0.503	0.328	0.722	0.547	1.050
Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Phablet SAR	Back	1.087	1.299	1.105	2.386	2.192	<b>3.491</b>
	Front	0.695	1.299*	1.105*	1.994	1.800	3.099
	Top	-	1.299*	1.105*	1.299	1.105	2.404
	Bottom	1.995	-	-	1.995	1.995	1.995
	Right	0.237	-	-	0.237	0.237	0.237
	Left	0.209	0.503	0.328	0.712	0.537	1.040
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Phablet SAR	Back	1.447	1.299	1.105	2.746	2.552	<b>3.851</b>
	Front	1.047	1.299*	1.105*	2.346	2.152	3.451
	Top	-	1.299*	1.105*	1.299	1.105	2.404
	Bottom	1.924	-	-	1.924	1.924	1.924
	Right	0.295	-	-	0.295	0.295	0.295
	Left	0.167	0.503	0.328	0.670	0.495	0.998

## 12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 105 of 114

# 13 SAR MEASUREMENT VARIABILITY

## 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1  
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	# of Time Slots	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1909.80	810	GSM 1900	GPRS	3	bottom	10 mm	0.815	0.793	1.03	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

## 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMG977KOR	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 106 of 114	

## 14 ADDITIONAL TESTING PER FCC GUIDANCE

### 14.1 Tuner Testing

The following test procedures were followed to demonstrate that the SAR results in Section 11 represented the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR was measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements were evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.

To evaluate all of the tuner states, the 25 tuner states were divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement was measured among the configurations. Single point time-sweep measurements were performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. While inserting and removing the USB cable between single point SAR measurements, the device was ensured to capture the same physical point SAR that generated the highest SAR. The SAR probe remained stationary at the same position throughout the entire series of single point measurements for each combination.

The operational description contains more information about the design and implementation of the dynamic antenna tuning.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 107 of 114

**Table 14-1  
LTE Supplemental Head SAR Data**

Supplemental Head SAR Data	
LTE Band 5	
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offsets	
Test Position	Right Cheek
Frequency (MHz)	836.5
Channel	20525
Measured 1g SAR (W/kg)	0.110
Average Value of Time Sweep (W/kg)	
Auto-tune (State 1)	0.142
Default (State 1)	0.142
State 1	0.142
State 2	0.141
State 3	0.141
State 4	0.141
State 5	0.126
State 6	0.114
State 7	0.142
State 8	0.142
State 9	0.088
State 10	0.141
State 11	0.107
State 12	0.113
State 13	0.105
State 14	0.074
State 15	0.082
State 16	0.066
State 17	0.089
State 18	0.138
State 19	0.032
State 20	0.076
State 21	0.064
State 22	0.047
State 23	0.083
State 24	0.068
State 25	0.085

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 108 of 114	

**Table 14-2  
LTE Supplemental Body SAR Data**

Supplemental Body SAR Data	
LTE Band 5	
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offsets	
Test Position	Back Side
Spacing	10 mm
Frequency (MHz)	836.5
Channel	20525
Measured 1g SAR (W/kg)	0.317
Average Value of Time Sweep (W/kg)	
Auto-tune (State 1)	0.496
Default (State 1)	0.505
State 1	0.505
State 2	0.453
State 3	0.469
State 4	0.510
State 5	0.497
State 6	0.476
State 7	0.505
State 8	0.505
State 9	0.298
State 10	0.439
State 11	0.421
State 12	0.438
State 13	0.359
State 14	0.375
State 15	0.367
State 16	0.217
State 17	0.291
State 18	0.438
State 19	0.419
State 20	0.398
State 21	0.216
State 22	0.147
State 23	0.157
State 25	0.195

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 109 of 114	

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	85033E	3 5mm Standard Calibration Kit	8/13/2018	Annual	8/13/2019	MY53402352
Agilent	8598A	(9kHz-3.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3851400187
Agilent	8753E	(30kHz-6GHz) Network Analyzer	9/28/2018	Annual	9/28/2019	JP28020182
Agilent	8753ES	S-Parameter Network Analyzer	7/30/2018	Annual	7/30/2019	MY4000670
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/30/2018	Annual	8/30/2019	MY40003841
Agilent	E4432B	ESG-D Series Signal Generator	4/19/2018	Annual	4/19/2019	US40053896
Agilent	E4438C	ESG Vector Signal Generator	3/21/2017	Biennial	3/21/2019	MY45090700
Agilent	E4440A	PSA Series Spectrum Analyzer	11/14/2018	Annual	11/14/2019	MY46186272
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	12/18/2018	Annual	12/18/2019	GB4230325
Agilent	E5515C	Wireless Communications Test Set	2/28/2018	Biennial	2/28/2020	GB4150275
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	N5182A	MXG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY47420800
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Amplifier Research	150A100C	DC Amplifier	CBT	N/A	CBT	348812
Anritsu	MA24106A	USB Power Sensor	7/17/2018	Annual	7/17/2019	1827527
Anritsu	MA24106A	USB Power Sensor	3/12/2018	Annual	3/12/2019	1944555
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1027293
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	1126066
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Anritsu	MT8820C	Radio Communication Analyzer	6/27/2018	Annual	6/27/2019	6201240328
Anritsu	MT8862A	Wireless Connectivity Test Set	7/3/2018	Annual	7/3/2019	6261782395
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	MLS5A00-009
COMTECH	AR85729-5/5798	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	17033044
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY3401181
Keysight Technologies	AT/N6705B	DC Power Supply	CBT	N/A	CBT	MY33001315
Keysight Technologies	U3401A	Digital Multimeter	5/17/2018	Annual	5/17/2019	MY57201470
MCL	BW-NGW5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini Circuits	PWR-SEN-4GH5	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
Mini Circuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R897950093
Mini Circuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6°CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	NC-100	Torque Wrench	4/18/2018	Annual	4/18/2019	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PES011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/18/2018	Annual	5/18/2019	109892
Rohde & Schwarz	CMW500	Radio Communication Tester	4/5/2018	Annual	4/5/2019	128633
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	5/29/2018	Annual	5/29/2019	161662
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	7/11/2018	Annual	7/11/2019	N/A
Seekonk	NC-100	Torque Wrench	7/11/2018	Annual	7/11/2019	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	D750V3	750 MHz Dipole	3/7/2017	Biennial	3/7/2019	1054
SPEAG	D835V2	835 MHz SAR Dipole	10/19/2018	Annual	10/19/2019	40407
SPEAG	D835V2	835 MHz SAR Dipole	10/19/2018	Annual	10/19/2019	40413
SPEAG	D1765V2	1765 MHz SAR Dipole	5/23/2018	Annual	5/23/2019	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Annual	10/23/2019	54149
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Biennial	9/11/2019	797
SPEAG	D2450V2	2450 MHz SAR Dipole	8/17/2017	Biennial	8/17/2019	719
SPEAG	D2600V2	2600 MHz SAR Dipole	4/11/2018	Annual	4/11/2019	1004
SPEAG	D5GHV2	5 GHz SAR Dipole	8/10/2018	Annual	8/10/2019	1237
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Biennial	1/15/2020	1003
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2018	Annual	10/22/2019	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Annual	10/23/2019	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	8/16/2018	Annual	8/16/2019	981
SPEAG	D5GHV2	5 GHz SAR Dipole	1/16/2018	Biennial	1/16/2020	1057
SPEAG	EX30V4	SAR Probe	7/20/2018	Annual	7/20/2019	7410
SPEAG	EX30V4	SAR Probe	6/25/2018	Annual	6/25/2019	7409
SPEAG	EX30V4	SAR Probe	1/25/2019	Annual	1/25/2020	3589
SPEAG	EX30V4	SAR Probe	4/18/2018	Annual	4/18/2019	7357
SPEAG	EX30V4	SAR Probe	1/24/2019	Annual	1/24/2020	7488
SPEAG	ES30V3	SAR Probe	3/13/2018	Annual	3/13/2019	3319
SPEAG	EX30V4	SAR Probe	8/23/2018	Annual	8/23/2019	7308
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2018	Annual	7/11/2019	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/22/2018	Annual	8/22/2019	1450
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/11/2018	Annual	4/11/2019	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2019	Annual	1/15/2020	1530
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/3/2018	Annual	10/3/2019	1558

Note:

- Each equipment item was used solely within its respective calibration period.
- CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 110 of 114	

# 16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>	RSS					11.5	11.3	60
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 111 of 114	

# 17 CONCLUSION

## 17.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset		Page 112 of 114

## 18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMG977KOR		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1901160006-01.A3L	Test Dates: 02/01/19 – 03/07/19	DUT Type: Portable Handset	Page 113 of 114	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

<b>FCC ID:</b> A3LSMG977KOR		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1901160006-01.A3L	<b>Test Dates:</b> 02/01/19 – 03/07/19	<b>DUT Type:</b> Portable Handset	Page 114 of 114	

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8963B**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Test Date: 02-01-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 836.6 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: GSM 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.07 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.128 W/kg**

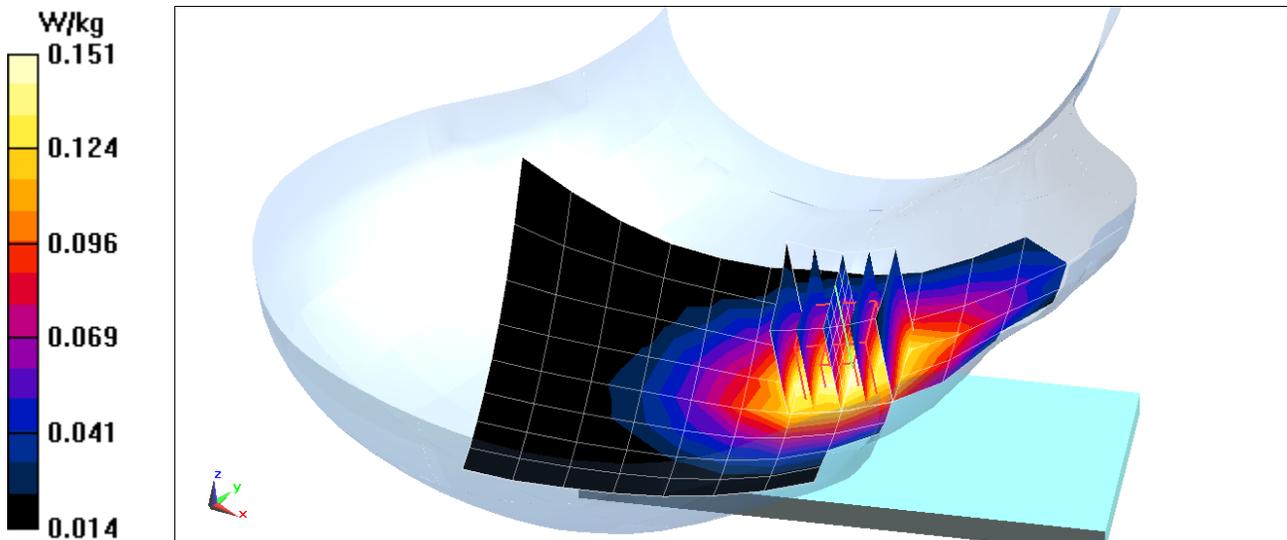

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.418 \text{ S/m}$ ;  $\epsilon_r = 39.011$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 02-06-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: GSM 1900, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.326 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0570 W/kg

**SAR(1 g) = 0.036 W/kg**

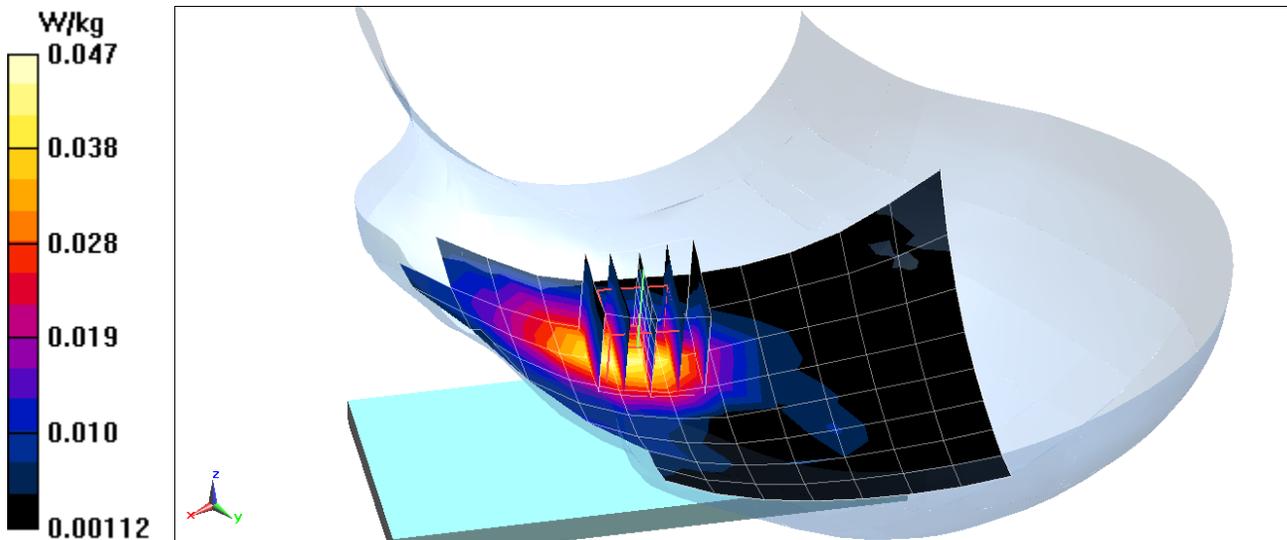

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9218B**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.6$  MHz;  $\sigma = 0.906$  S/m;  $\epsilon_r = 40.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

Test Date: 02-04-2019; Ambient Temp: 21.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 836.6 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.43 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.093 W/kg**

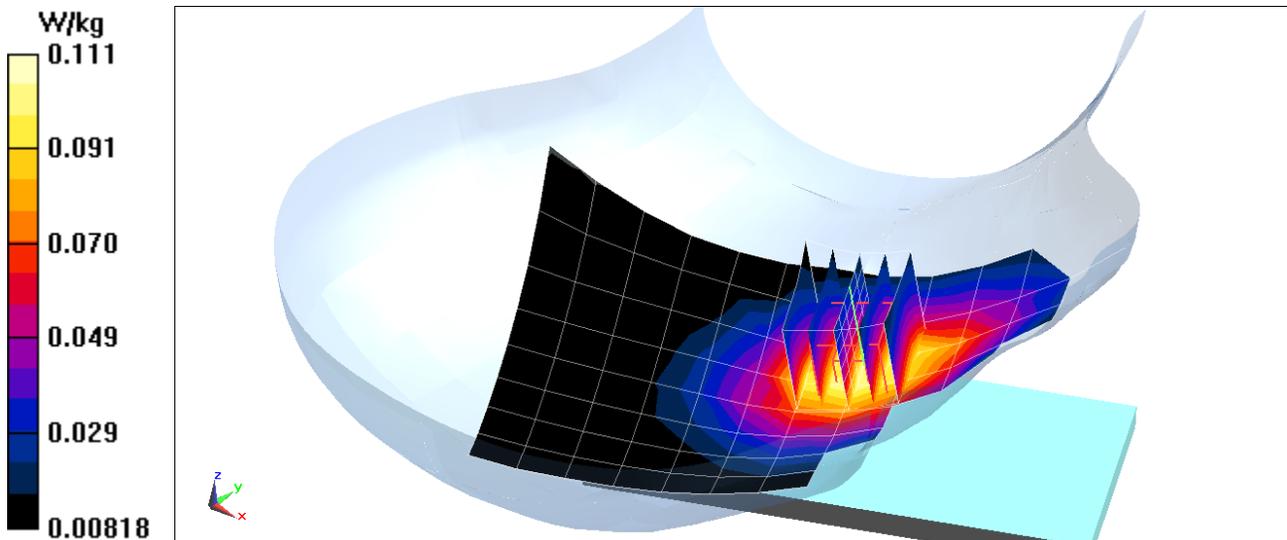

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used (interpolated):  
 $f = 1732.4$  MHz;  $\sigma = 1.378$  S/m;  $\epsilon_r = 41.887$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 02-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(8.43, 8.43, 8.43) @ 1732.4 MHz; Calibrated: 6/25/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 6/18/2018  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1750, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.880 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.058 W/kg**

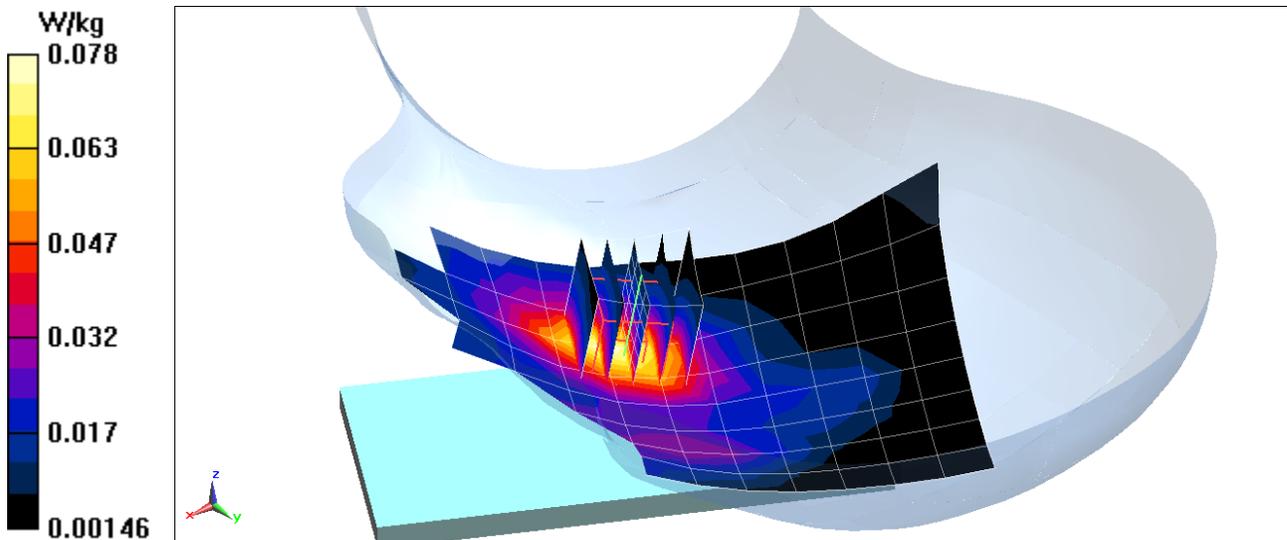

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**

Communication System: UID 0, \_UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used (interpolated):  
 $f = 1852.4$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.079$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 02-06-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1852.4 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1900, Left Head, Cheek, Low.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.297 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0770 W/kg

**SAR(1 g) = 0.051 W/kg**

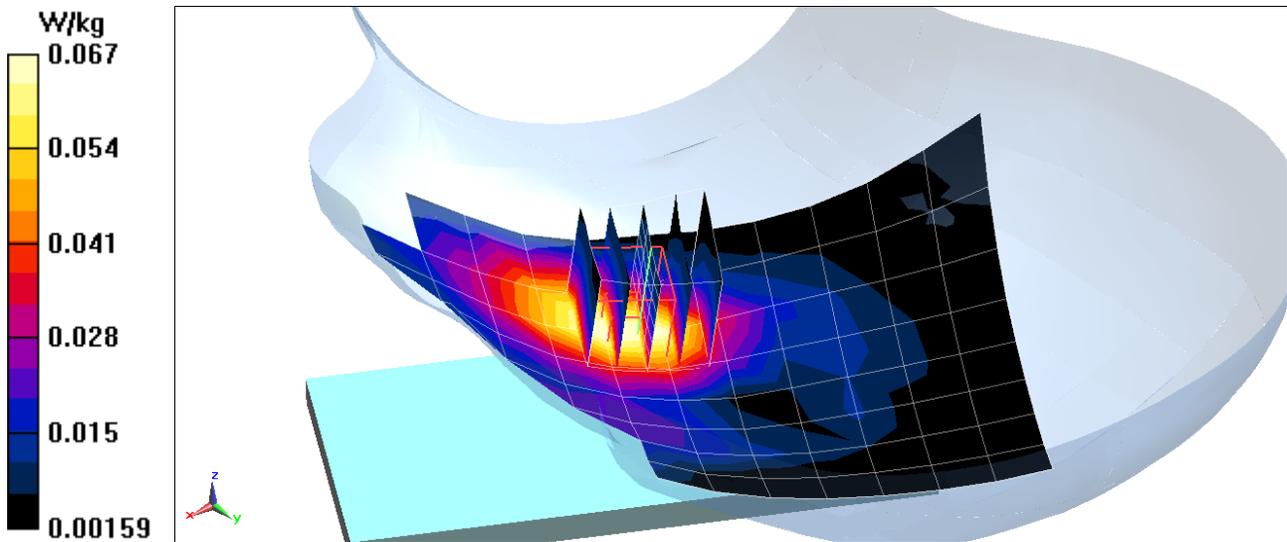

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Head Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.883 \text{ S/m}$ ;  $\epsilon_r = 42.138$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 02-14-2019; Ambient Temp: 22.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7410; ConvF(10.13, 10.13, 10.13) @ 707.5 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.12 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.082 W/kg**

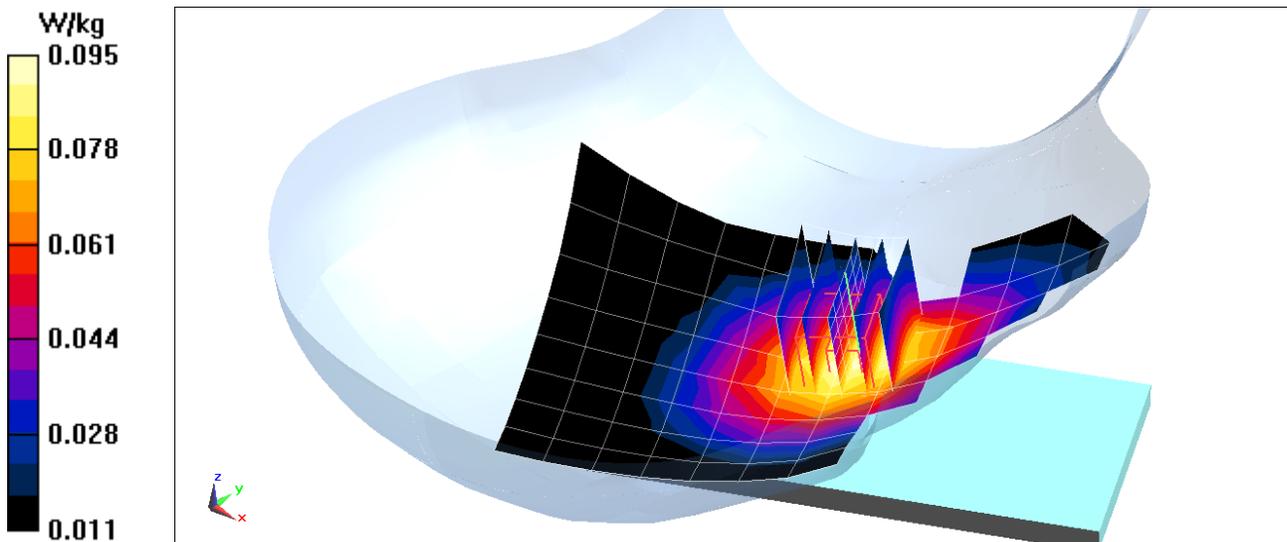

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 41.88$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02-14-2019; Ambient Temp: 22.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7410; ConvF(10.13, 10.13, 10.13) @ 782 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.723 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0800 W/kg

**SAR(1 g) = 0.064 W/kg**

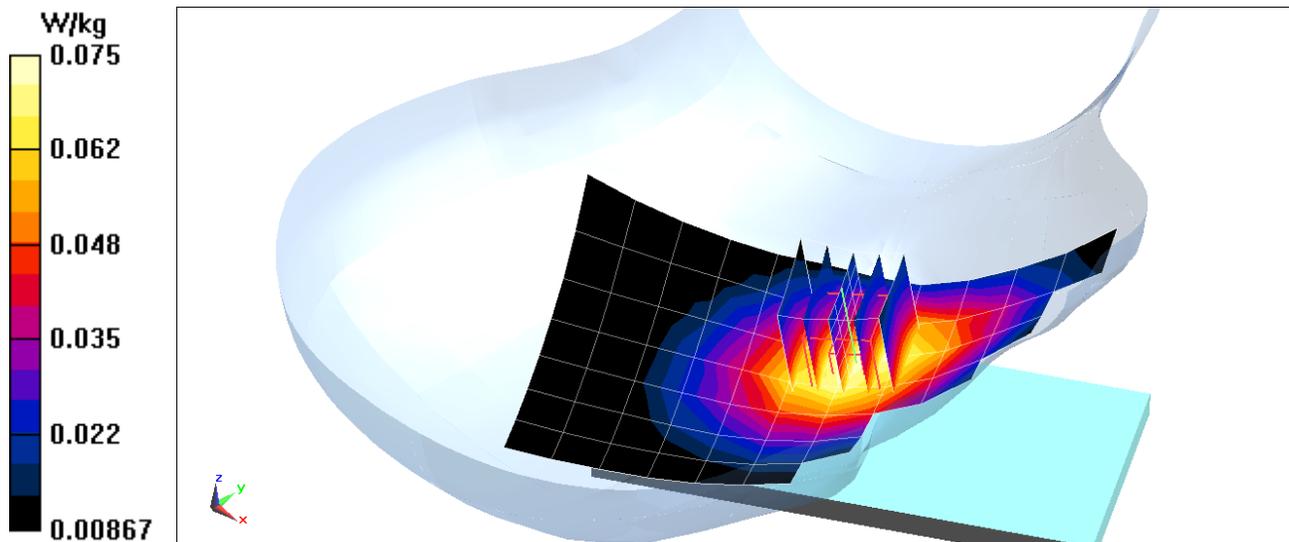

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8963B**


Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.914 \text{ S/m}$ ;  $\epsilon_r = 41.157$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 02-08-2019; Ambient Temp: 21.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 831.5 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 11.60 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.142 W/kg  
**SAR(1 g) = 0.113 W/kg**

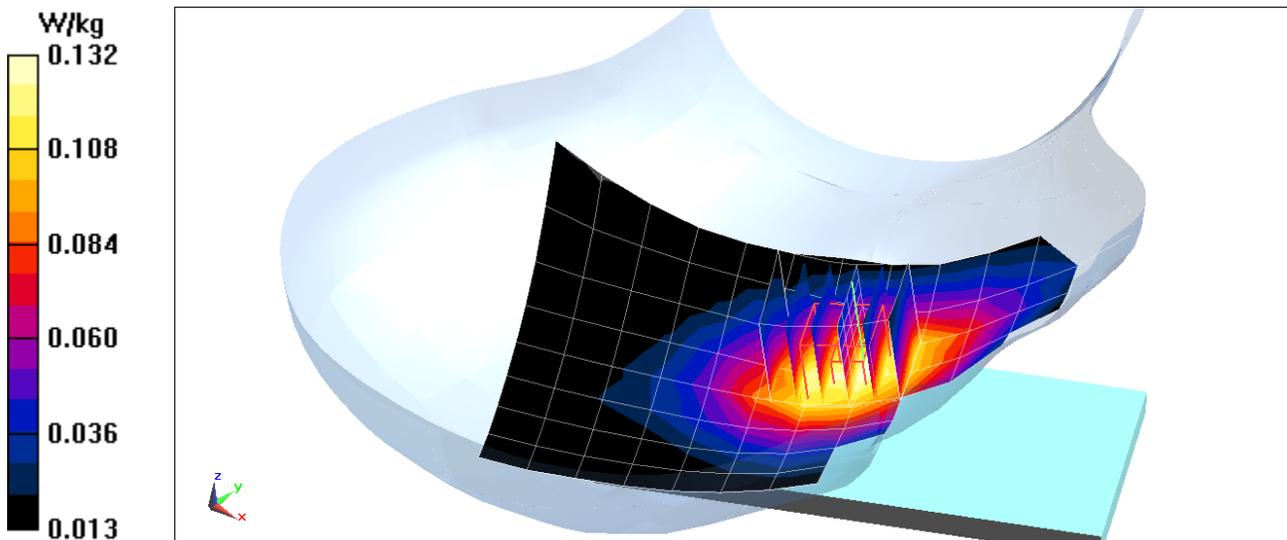

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8963B**


Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.916 \text{ S/m}$ ;  $\epsilon_r = 41.14$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 02-08-2019; Ambient Temp: 21.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 836.5 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 11.86 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.141 W/kg  
**SAR(1 g) = 0.110 W/kg**

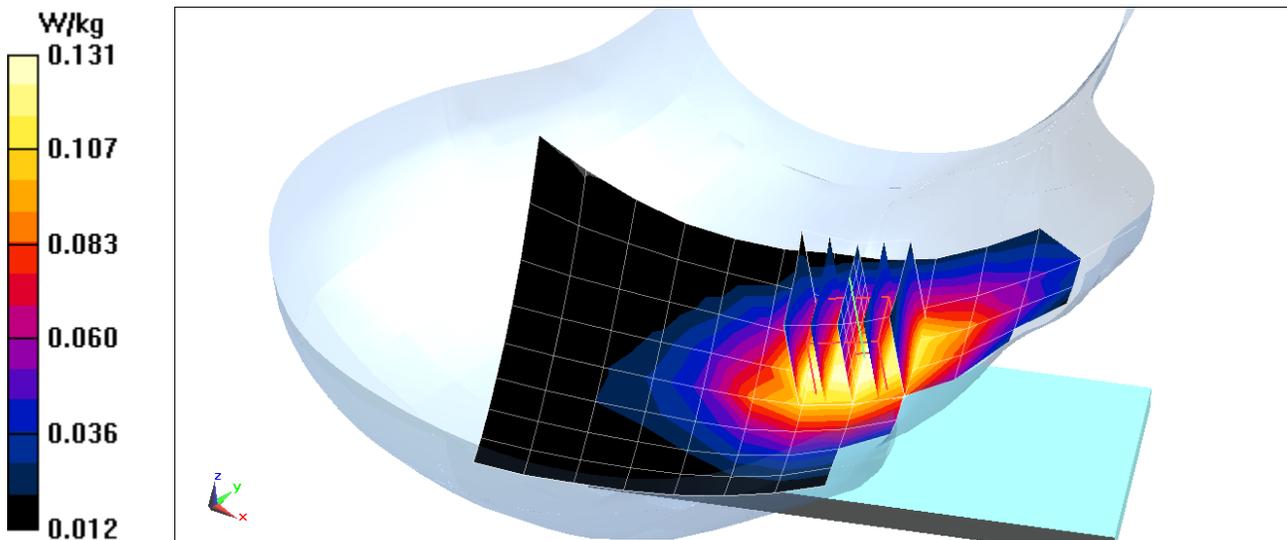

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**


Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used (interpolated):  
 $f = 1720$  MHz;  $\sigma = 1.371$  S/m;  $\epsilon_r = 41.911$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 02-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(8.43, 8.43, 8.43) @ 1720 MHz; Calibrated: 6/25/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 6/18/2018  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Left Head, Cheek, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.026 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 0.0890 W/kg  
**SAR(1 g) = 0.059 W/kg**

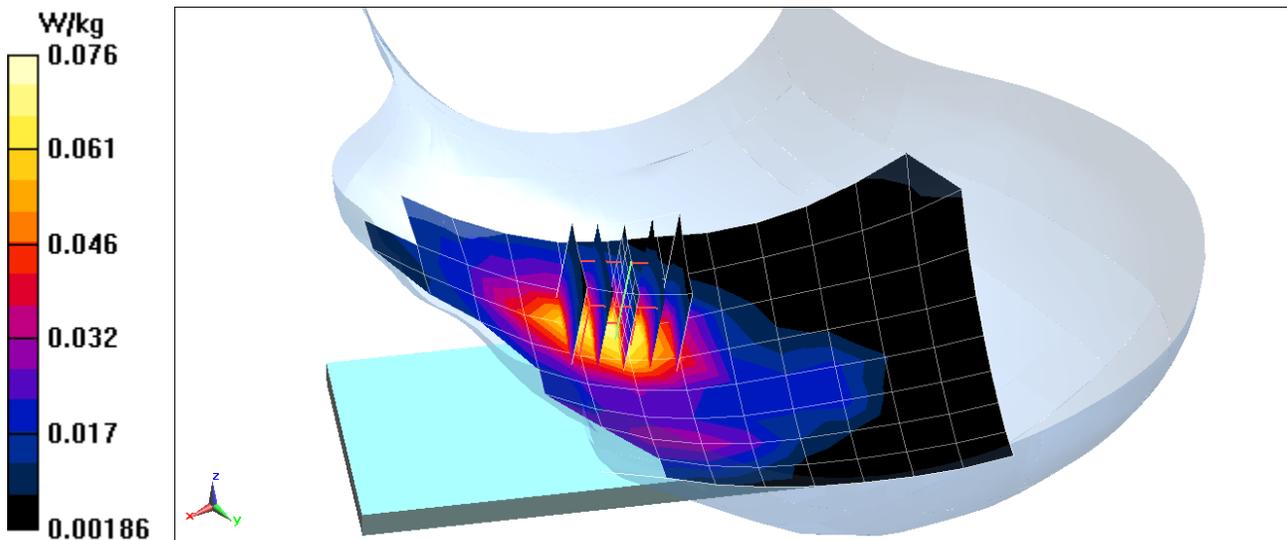

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8963B**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used (interpolated):  
 $f = 1860$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 38.604$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 02-04-2019; Ambient Temp: 21.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1860 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.625 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.065 W/kg**

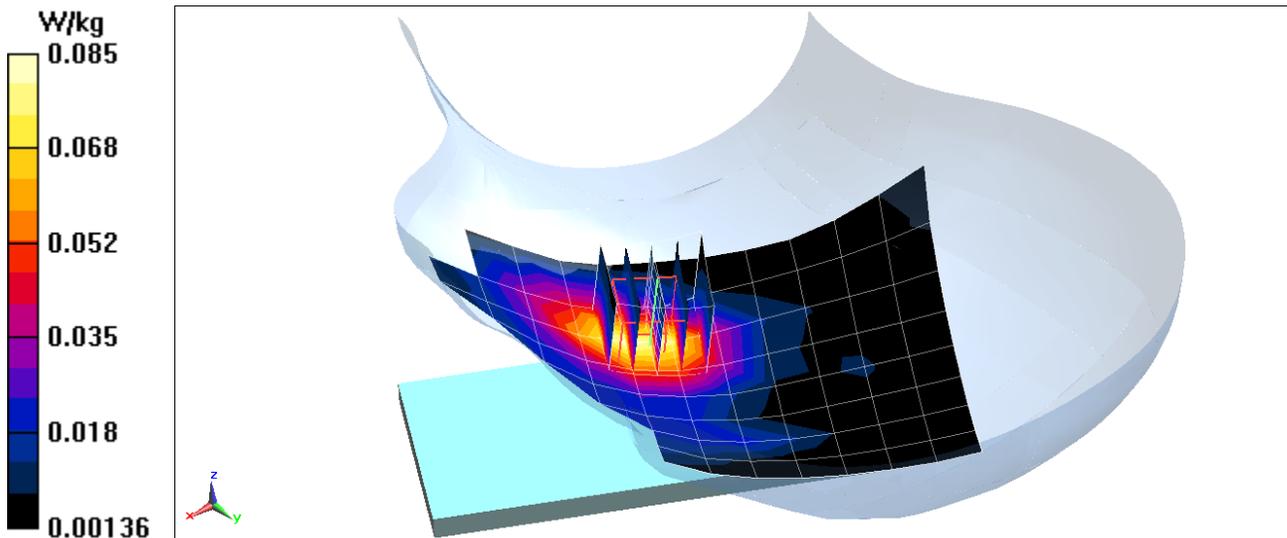

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58  
Medium: 2450 Head Medium parameters used (interpolated):  
 $f = 2680 \text{ MHz}$ ;  $\sigma = 1.973 \text{ S/m}$ ;  $\epsilon_r = 37.904$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 02-05-2019; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF(7.24, 7.24, 7.24) @ 2680 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41, Left Head, Cheek, High.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.971 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0490 W/kg

**SAR(1 g) = 0.026 W/kg**

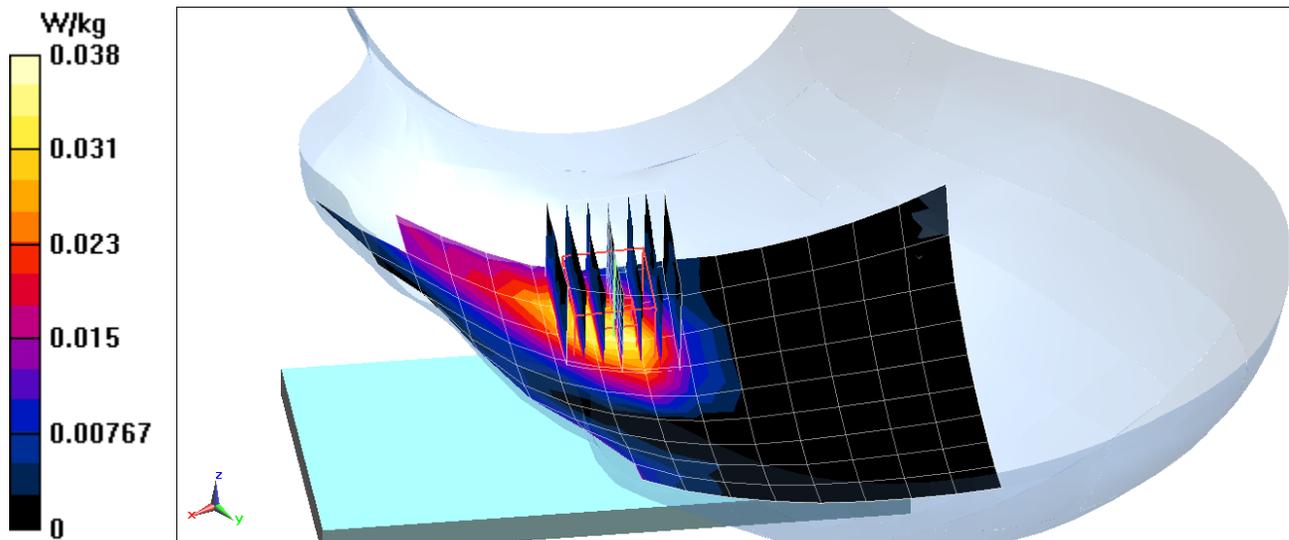

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9212B**


Communication System: UID 0, \_IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Head Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 1.806 \text{ S/m}$ ;  $\epsilon_r = 39.525$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 03-07-2019; Ambient Temp: 21.8°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(6.46, 6.46, 6.46) @ 2437 MHz; Calibrated: 1/25/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1450; Calibrated: 8/22/2018  
Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth,  
Right Head, Tilt, Ch 6, 1 Mbps**

**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.017 V/m; Power Drift = 0.21 dB  
Peak SAR (extrapolated) = 2.10 W/kg  
**SAR(1 g) = 0.705 W/kg**

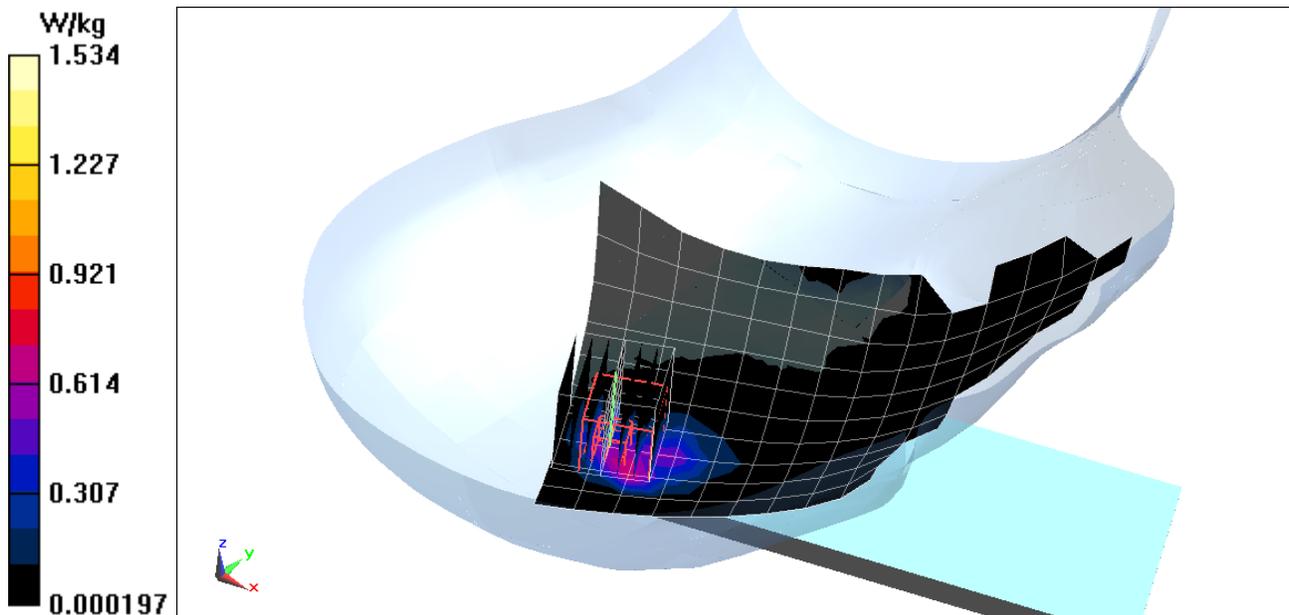

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9212B**

Communication System: UID 0, \_IEEE 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1  
Medium: 5GHz Head Medium parameters used (interpolated):  
 $f = 5775 \text{ MHz}$ ;  $\sigma = 5.203 \text{ S/m}$ ;  $\epsilon_r = 33.992$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 02-19-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(4.82, 4.82, 4.82) @ 5775 MHz; Calibrated: 6/25/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 6/18/2018  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11ac, MIMO, U-NII-3, 80 MHz Bandwidth,  
Right Head, Cheek, Ch 155, 58.5 Mbps**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 3.927 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.299 W/kg**

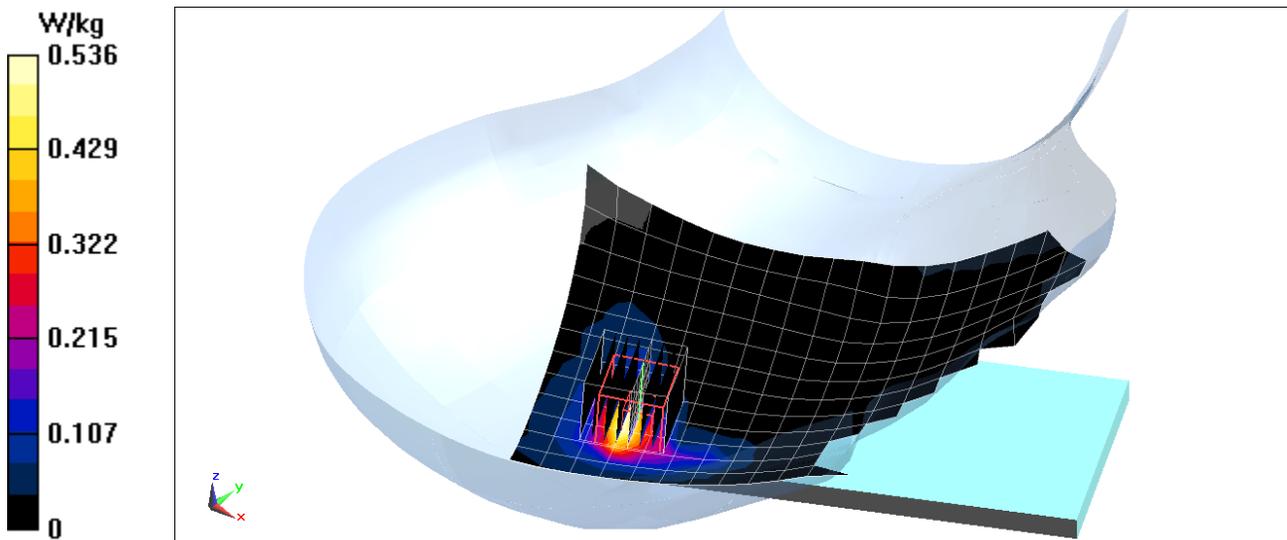

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8968B**

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.289

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$ ;  $\sigma = 1.806 \text{ S/m}$ ;  $\epsilon_r = 40.41$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02-21-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(6.46, 6.46, 6.46) @ 2441 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: Bluetooth, Right Head, Cheek, Ch 39, 1Mbps**


**Area Scan (11x19x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.38 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.616 W/kg**

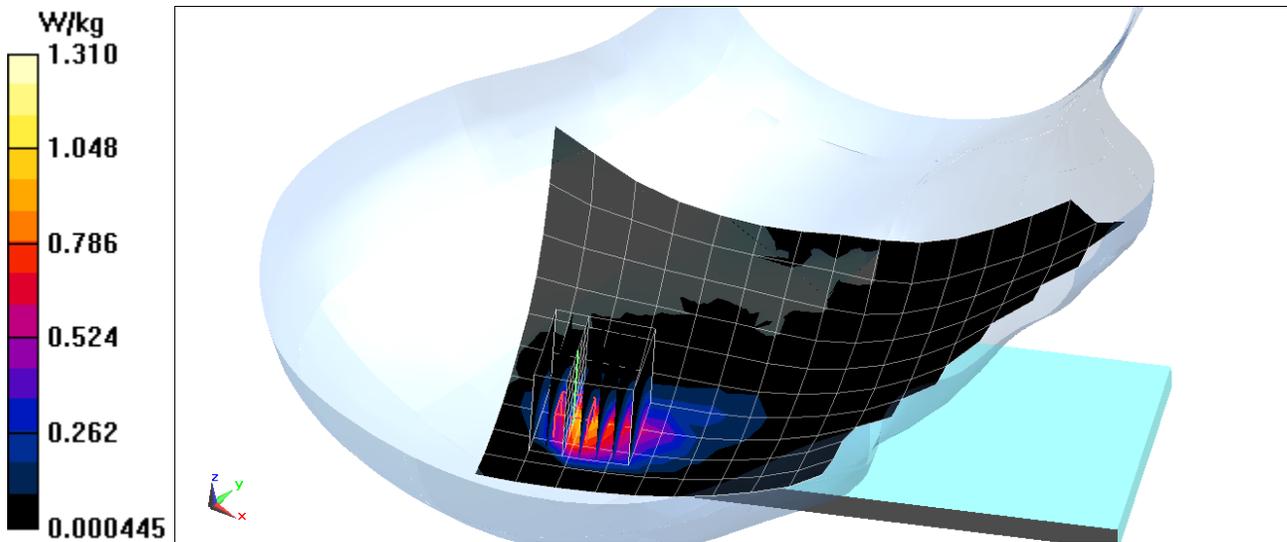

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.974 \text{ S/m}$ ;  $\epsilon_r = 54.081$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: GSM 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.60 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.122 W/kg**

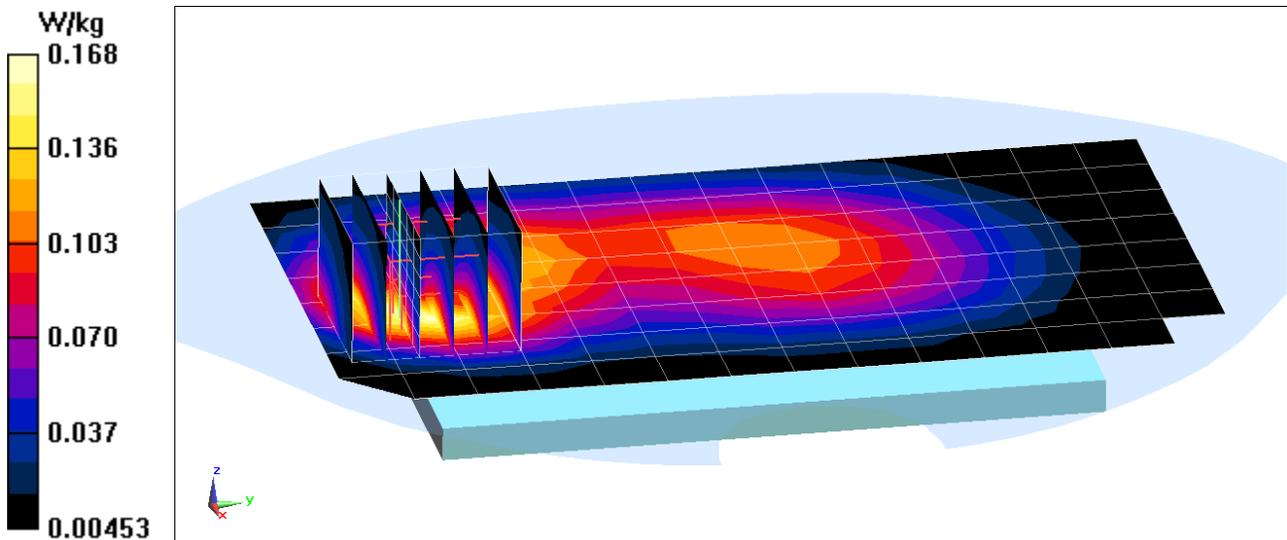

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9216B**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.974 \text{ S/m}$ ;  $\epsilon_r = 54.081$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 4 Tx Slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.305 W/kg**

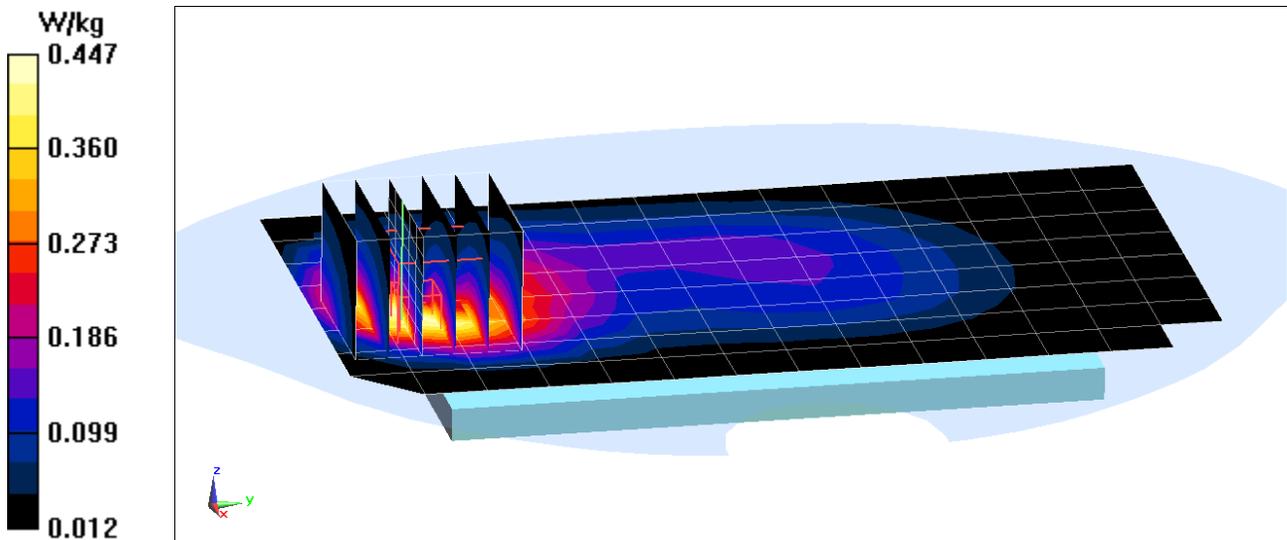

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.388$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-14-2019; Ambient Temp: 21.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1880 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: GSM 1900, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.889 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.136 W/kg**

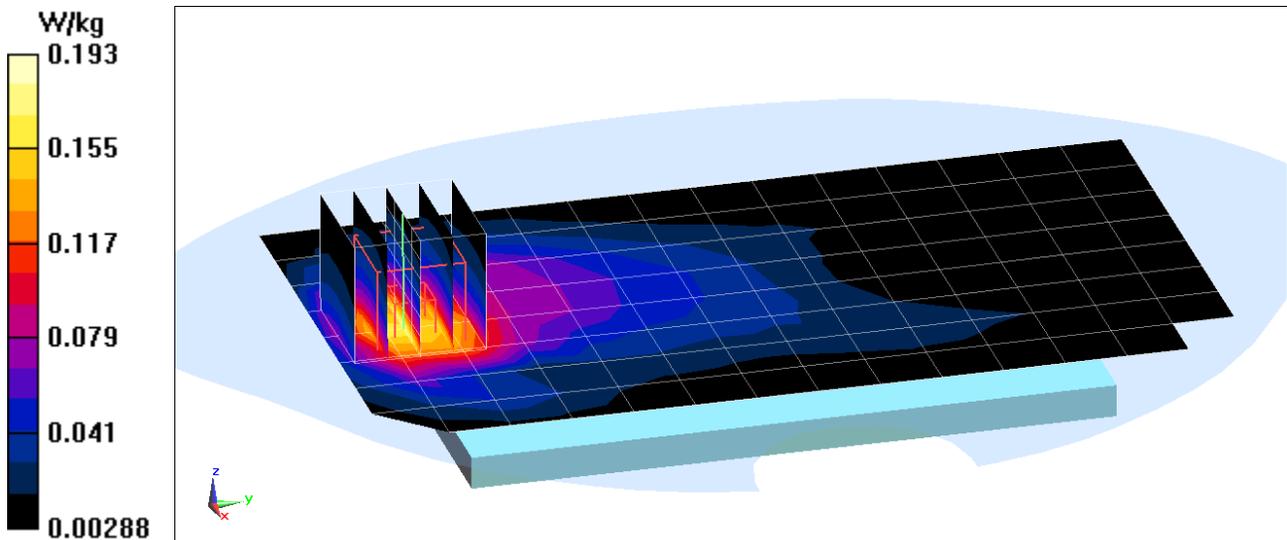

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**

Communication System: UID 0, \_GSM GPRS; 3 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1910$  MHz;  $\sigma = 1.571$  S/m;  $\epsilon_r = 52.335$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-14-2019; Ambient Temp: 21.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1909.8 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.17 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.815 W/kg**

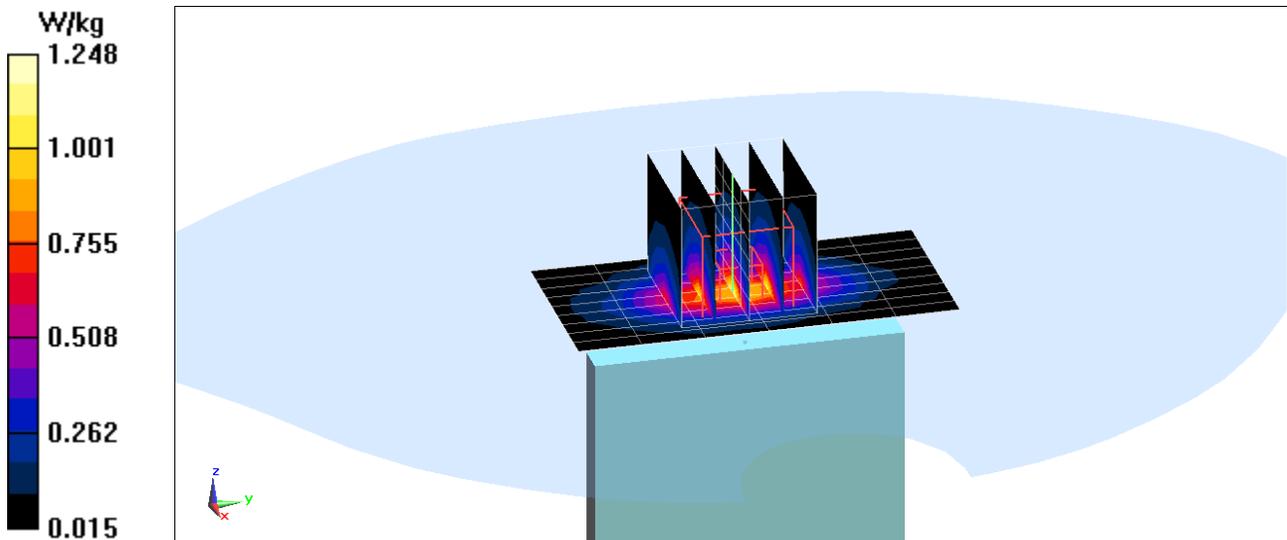

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.974 \text{ S/m}$ ;  $\epsilon_r = 54.081$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.237 W/kg

**SAR(1 g) = 0.145 W/kg**

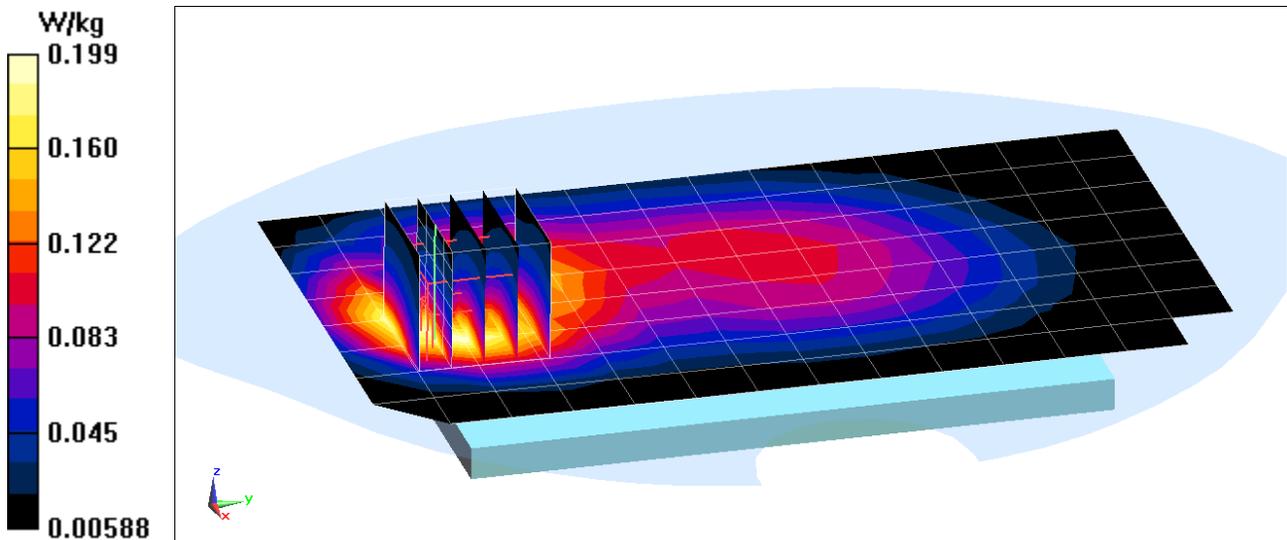

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 6428B**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.986 \text{ S/m}$ ;  $\epsilon_r = 54.254$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-25-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.07 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.581 W/kg

**SAR(1 g) = 0.336 W/kg**

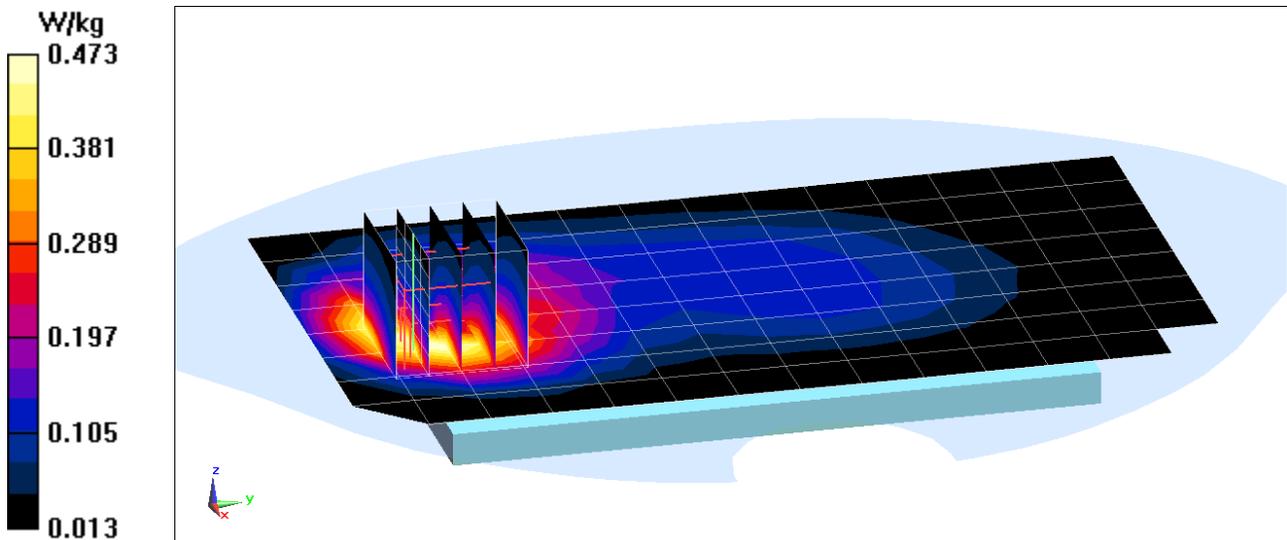

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5621B**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.436 \text{ S/m}$ ;  $\epsilon_r = 52.58$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1732.4 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1750, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.96 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.599 W/kg

**SAR(1 g) = 0.379 W/kg**

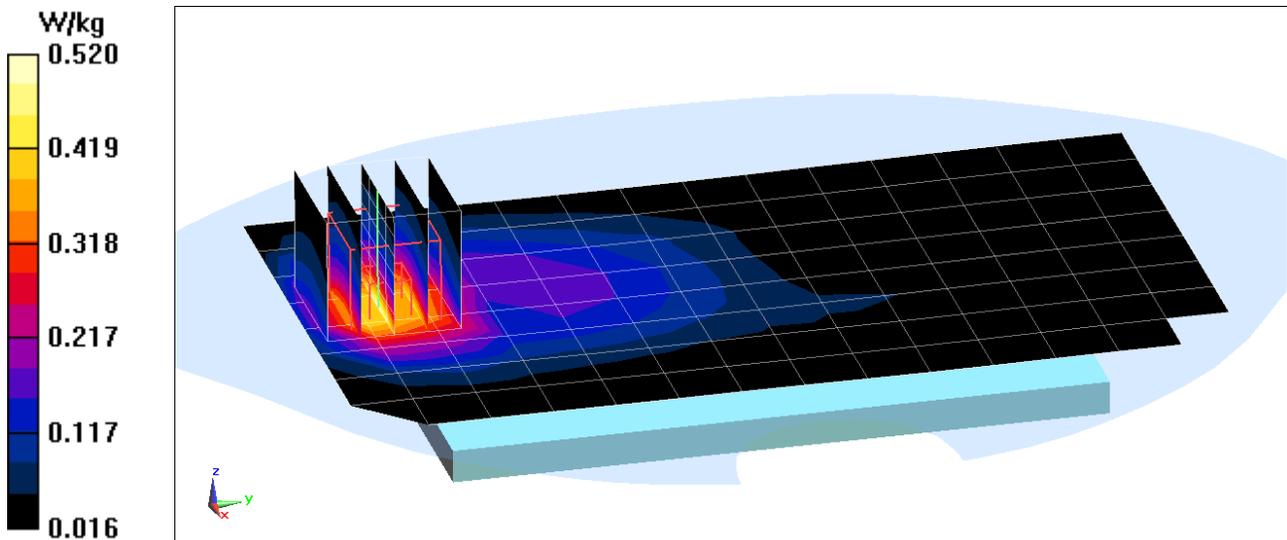

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5621B**

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1752.6$  MHz;  $\sigma = 1.459$  S/m;  $\epsilon_r = 52.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1752.6 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1750, Body SAR, Bottom Edge, High.ch**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.98 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.630 W/kg**

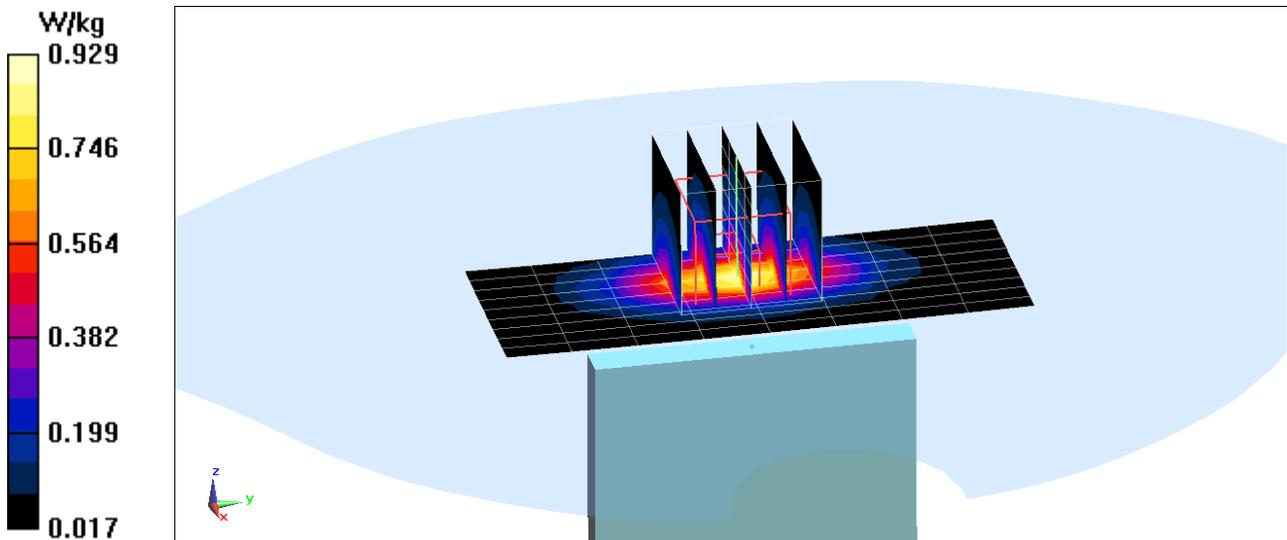

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1852.4$  MHz;  $\sigma = 1.521$  S/m;  $\epsilon_r = 53.469$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1852.4 MHz; Calibrated: 1/24/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1530; Calibrated: 1/15/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1900, Body SAR, Back side, Low.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.15 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.329 W/kg

**SAR(1 g) = 0.204 W/kg**

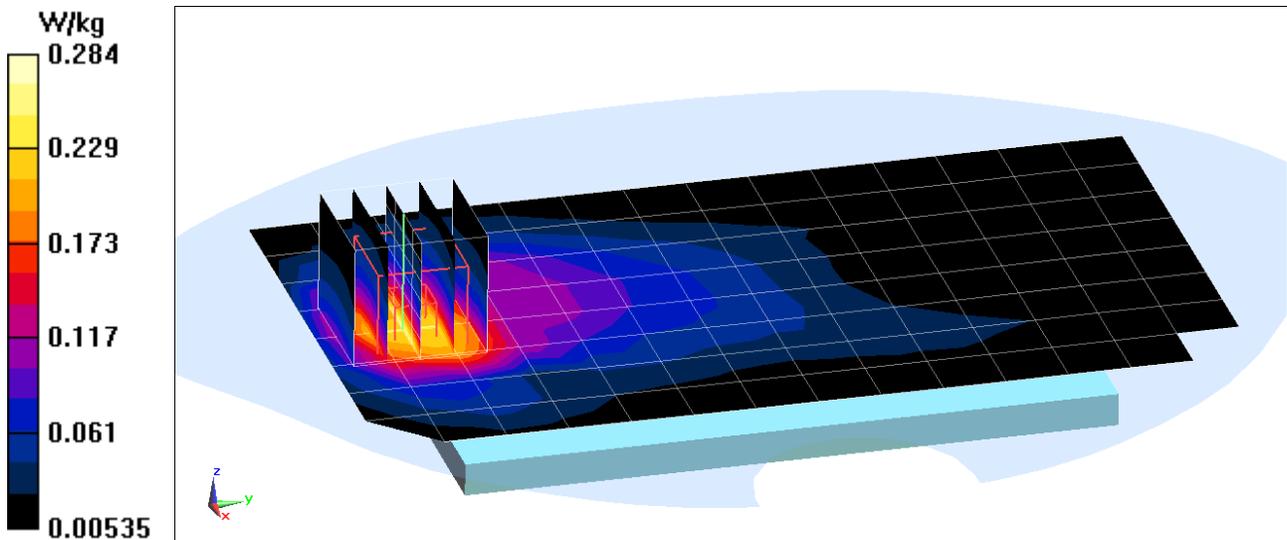

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**

Communication System: UID 0, \_UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.521 \text{ S/m}$ ;  $\epsilon_r = 53.469$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1852.4 MHz; Calibrated: 1/24/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1530; Calibrated: 1/15/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1900, Body SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.50 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.812 W/kg

**SAR(1 g) = 0.460 W/kg**

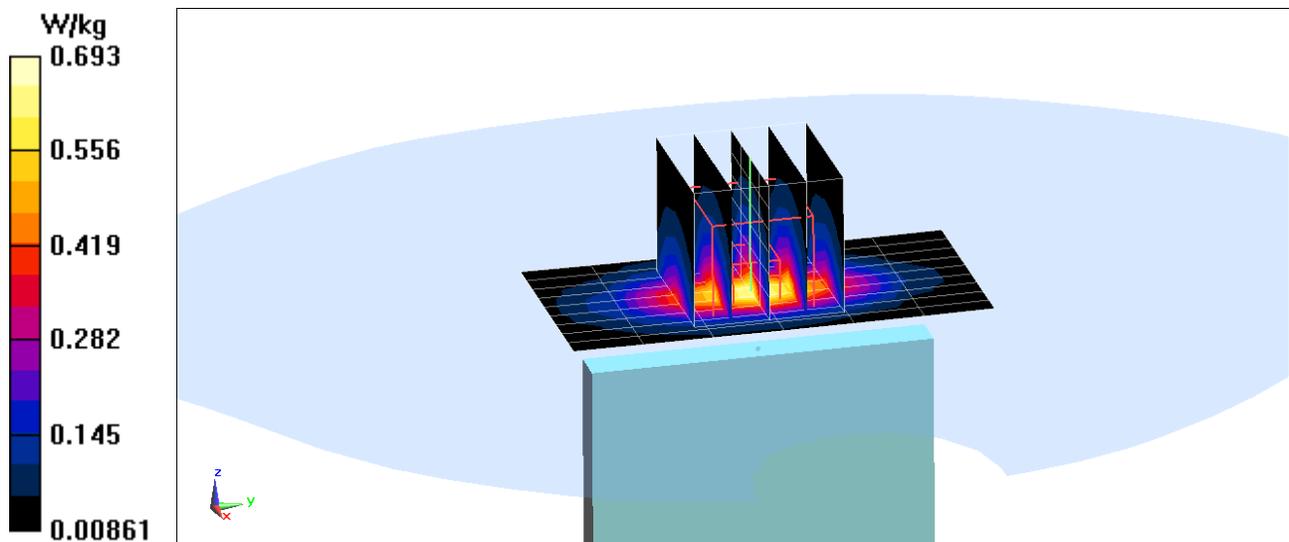

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5655B**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.931 \text{ S/m}$ ;  $\epsilon_r = 53.947$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-25-2019; Ambient Temp: 21.8°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN3589; ConvF(8.34, 8.34, 8.34) @ 707.5 MHz; Calibrated: 1/25/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1450; Calibrated: 8/22/2018  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.28 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.115 W/kg**

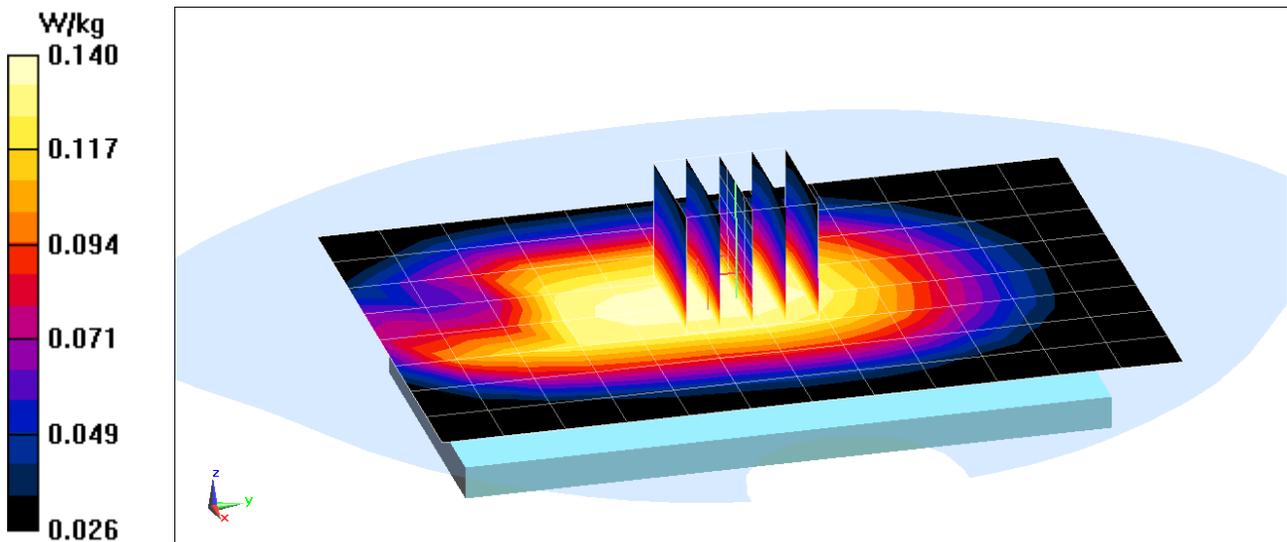

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5655B**

Communication System: UID 0, \_LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.931 \text{ S/m}$ ;  $\epsilon_r = 53.947$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-25-2019; Ambient Temp: 21.8°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN3589; ConvF(8.34, 8.34, 8.34) @ 707.5 MHz; Calibrated: 1/25/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1450; Calibrated: 8/22/2018  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Body SAR, Right Edge, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (13x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.24 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.239 W/kg

**SAR(1 g) = 0.157 W/kg**

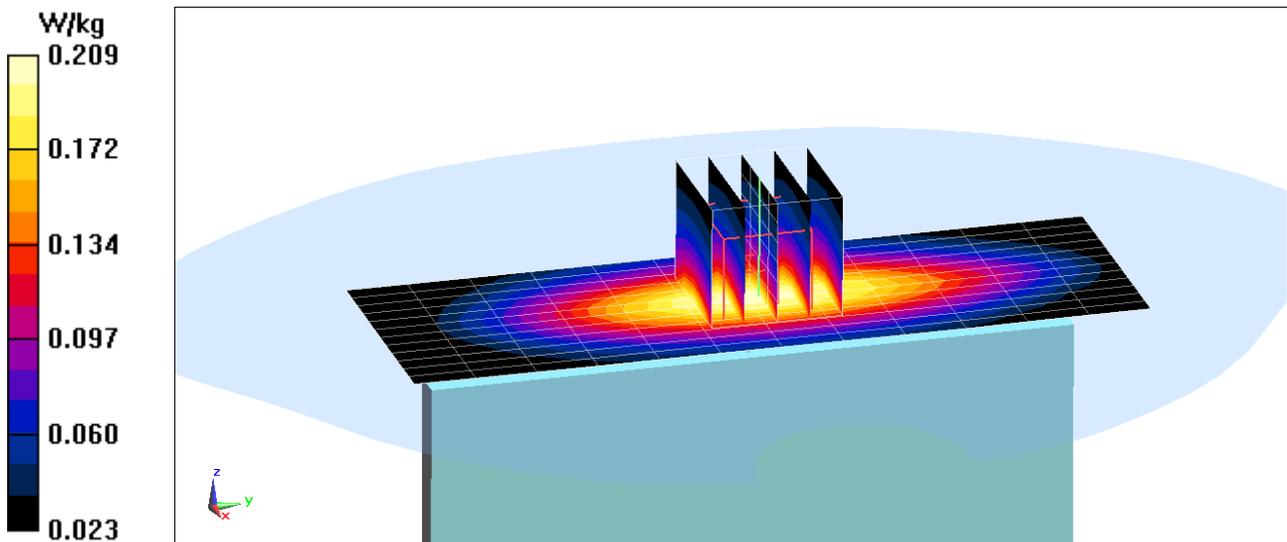

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8963B**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 782 \text{ MHz}$ ;  $\sigma = 0.988 \text{ S/m}$ ;  $\epsilon_r = 53.098$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3589; ConvF(8.34, 8.34, 8.34) @ 782 MHz; Calibrated: 1/25/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1450; Calibrated: 8/22/2018  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (9x11x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.114 W/kg**

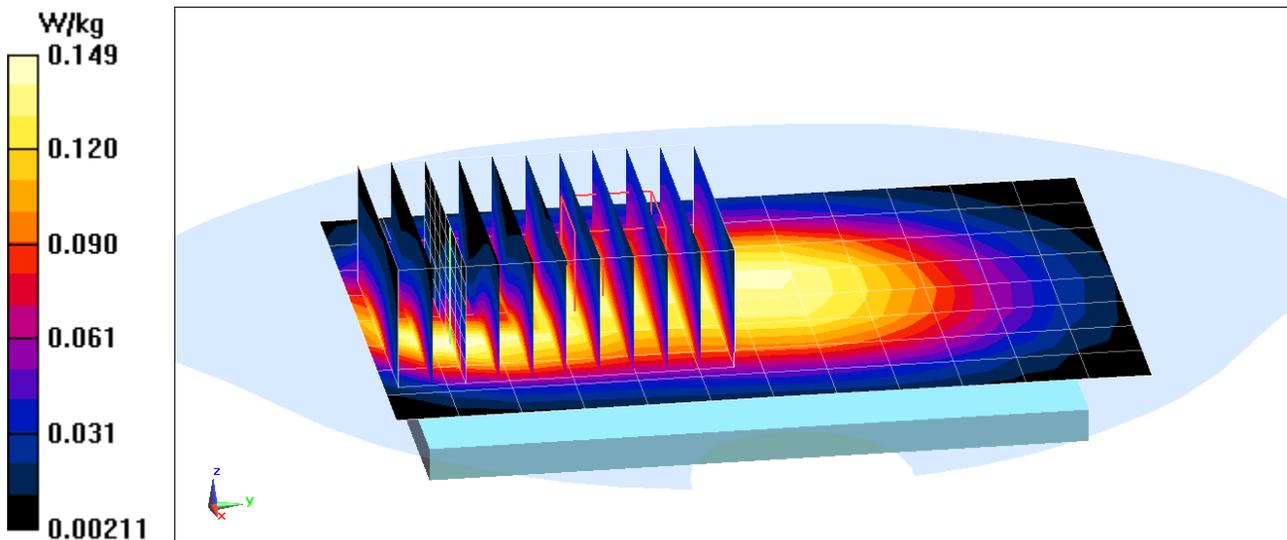

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8963B**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 782 \text{ MHz}$ ;  $\sigma = 0.988 \text{ S/m}$ ;  $\epsilon_r = 53.098$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3589; ConvF(8.34, 8.34, 8.34) @ 782 MHz; Calibrated: 1/25/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1450; Calibrated: 8/22/2018  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.81 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.423 W/kg

**SAR(1 g) = 0.233 W/kg**

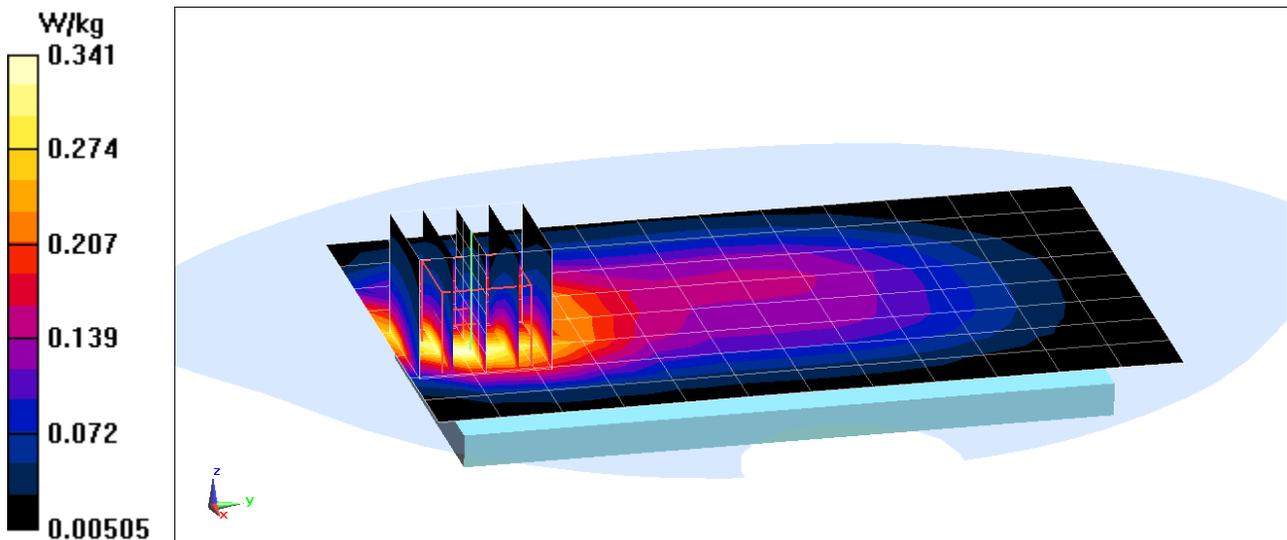

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.968 \text{ S/m}$ ;  $\epsilon_r = 54.134$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 831.5 MHz; Calibrated: 4/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.21 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.135 W/kg**

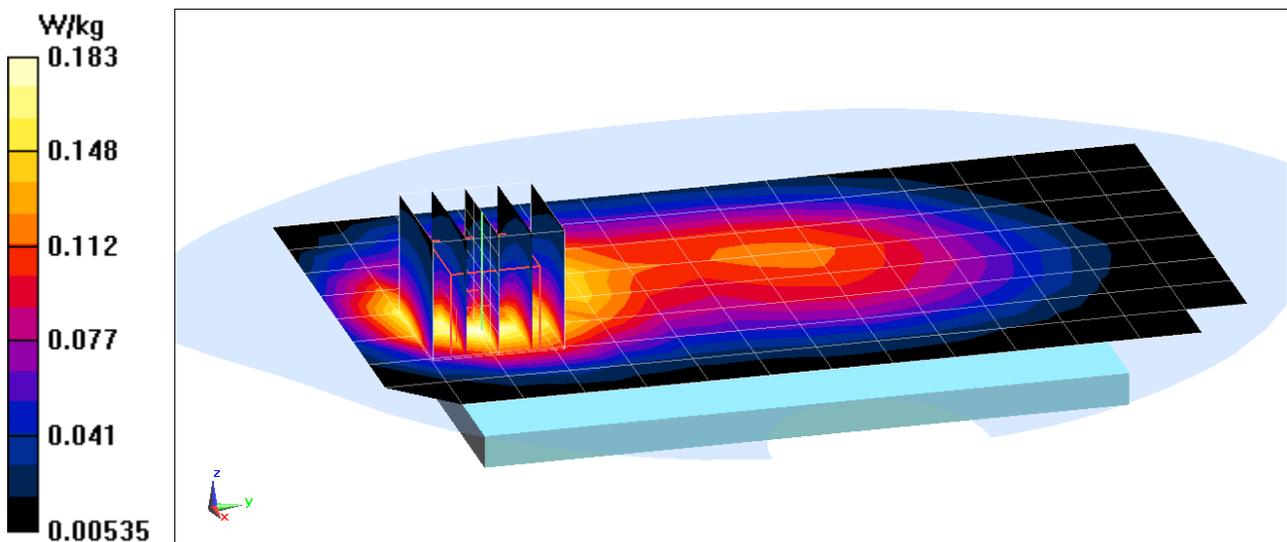

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.968 \text{ S/m}$ ;  $\epsilon_r = 54.134$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 831.5 MHz; Calibrated: 4/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.25 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.523 W/kg

**SAR(1 g) = 0.304 W/kg**

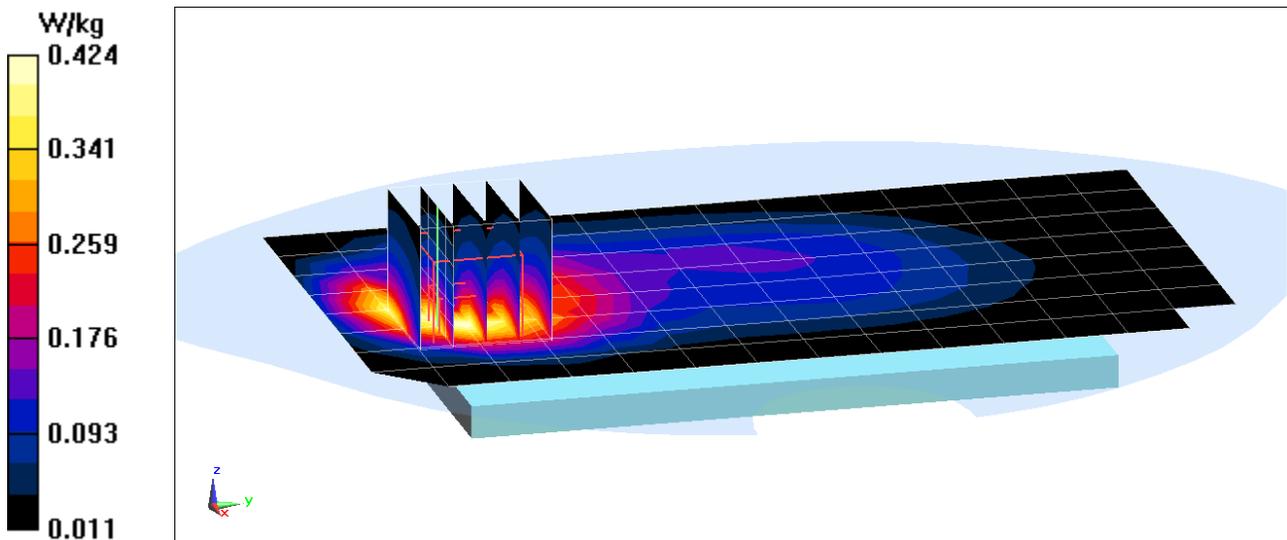

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**


Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.974 \text{ S/m}$ ;  $\epsilon_r = 54.082$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.5 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 12.73 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.238 W/kg  
**SAR(1 g) = 0.150 W/kg**

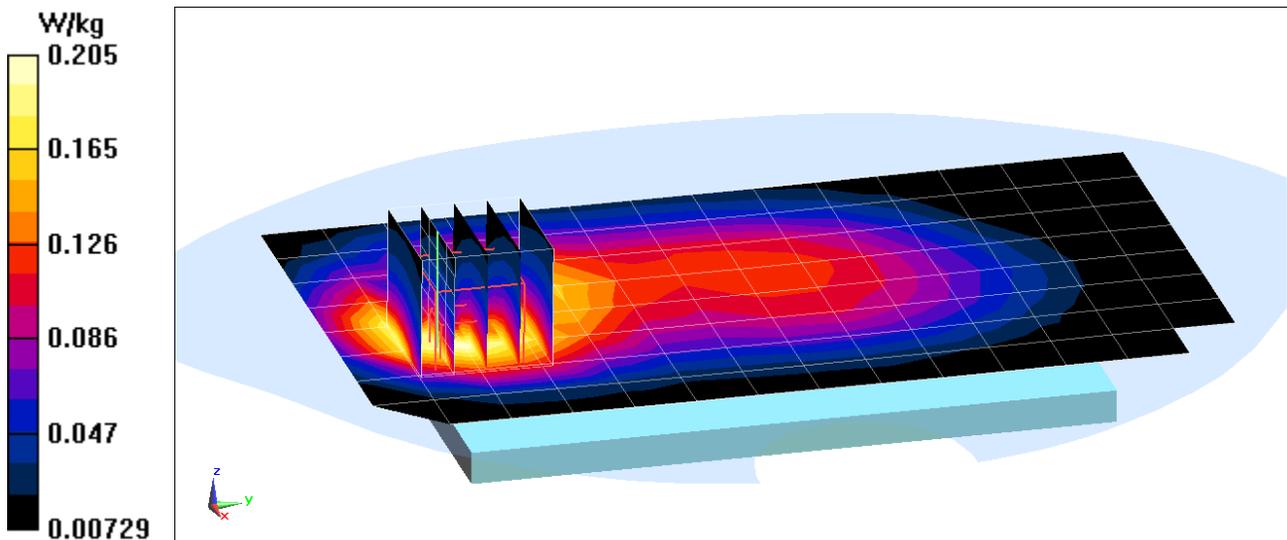

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9225B**

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.974 \text{ S/m}$ ;  $\epsilon_r = 54.082$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.5 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.62 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.542 W/kg

**SAR(1 g) = 0.317 W/kg**

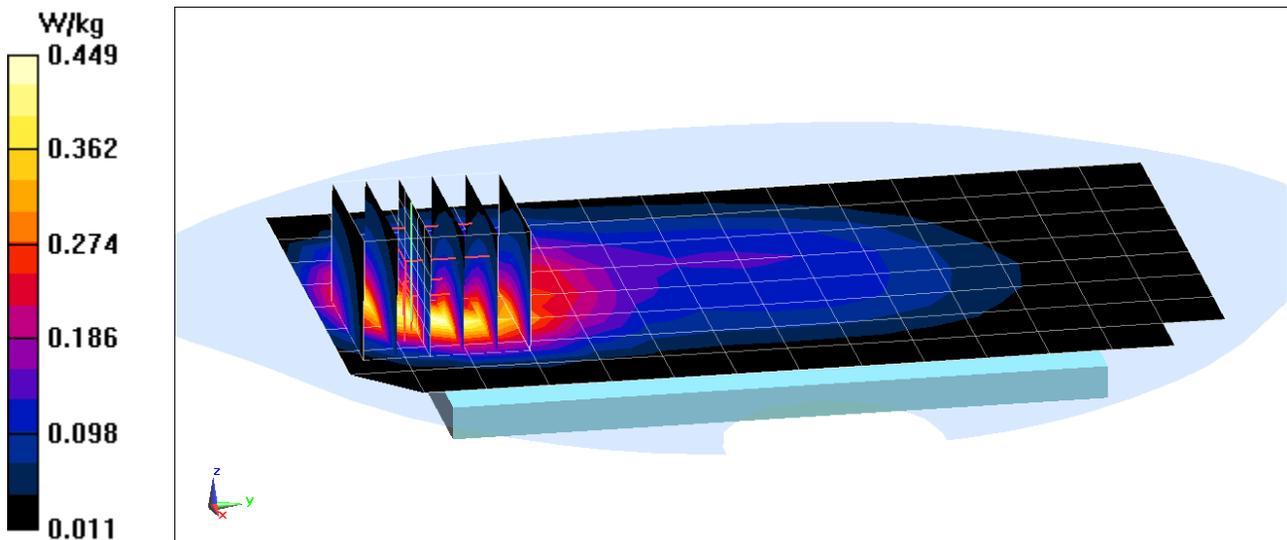

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5584B**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1720 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 52.624$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1720 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.95 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.289 W/kg

**SAR(1 g) = 0.187 W/kg**

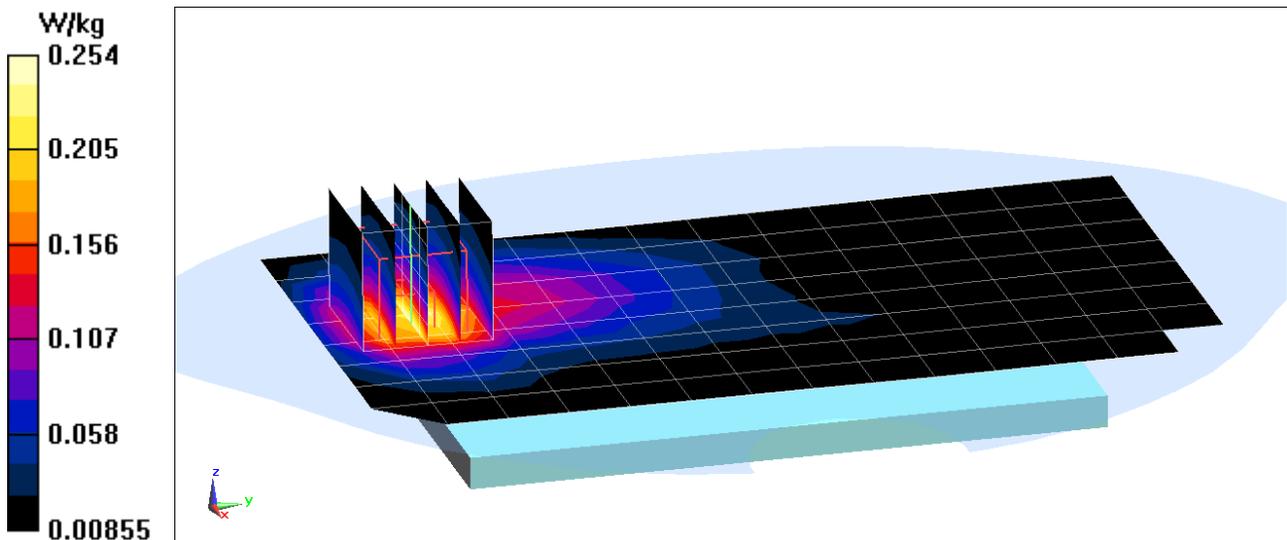

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5584B**

Communication System: UID 0, \_LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1770 \text{ MHz}$ ;  $\sigma = 1.476 \text{ S/m}$ ;  $\epsilon_r = 52.474$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1770 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Body SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.30 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.762 W/kg

**SAR(1 g) = 0.440 W/kg**

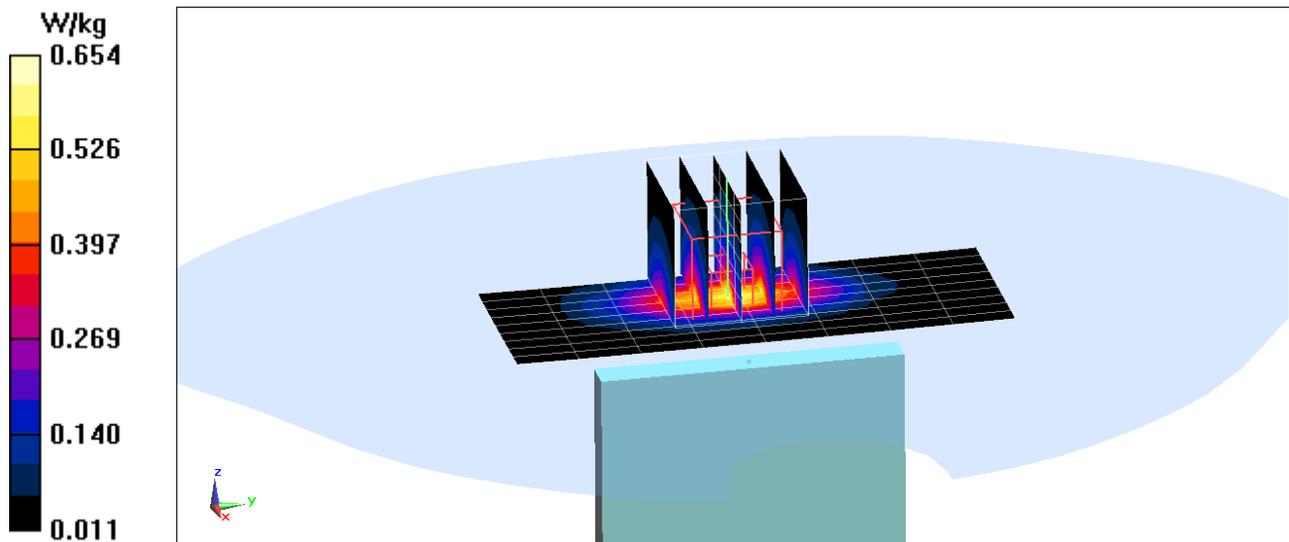

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1860 \text{ MHz}$ ;  $\sigma = 1.53 \text{ S/m}$ ;  $\epsilon_r = 53.438$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1860 MHz; Calibrated: 1/24/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1530; Calibrated: 1/15/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.19 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.395 W/kg

**SAR(1 g) = 0.241 W/kg**

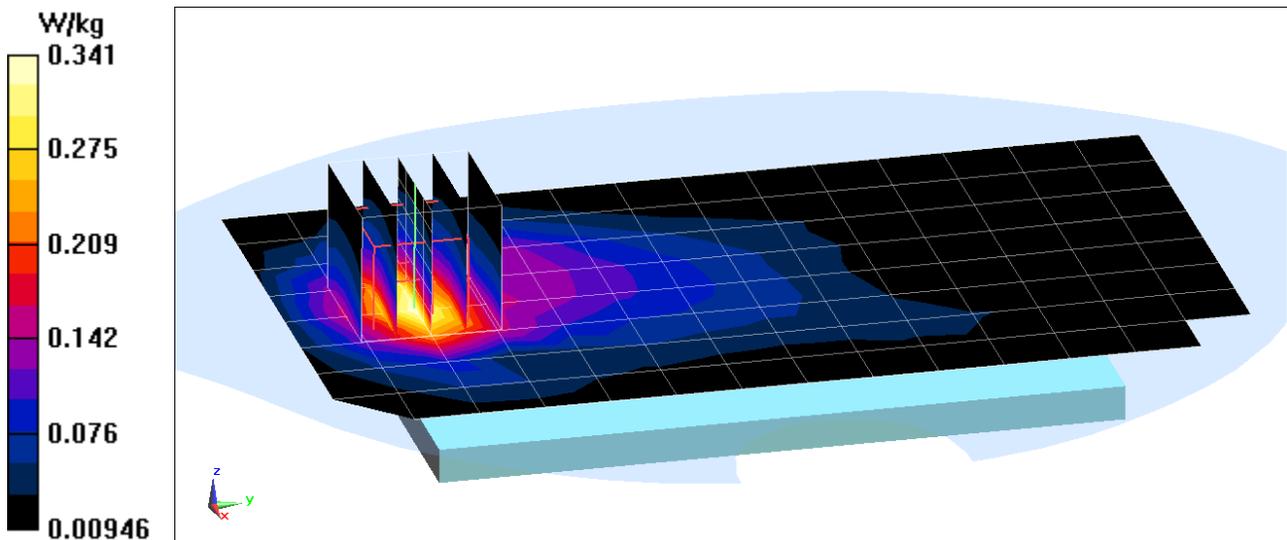

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**


Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz, Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1905 \text{ MHz}$ ;  $\sigma = 1.585 \text{ S/m}$ ;  $\epsilon_r = 53.241$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1905 MHz; Calibrated: 1/24/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1530; Calibrated: 1/15/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

**Area Scan (9x9x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.90 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 1.33 W/kg  
**SAR(1 g) = 0.739 W/kg**

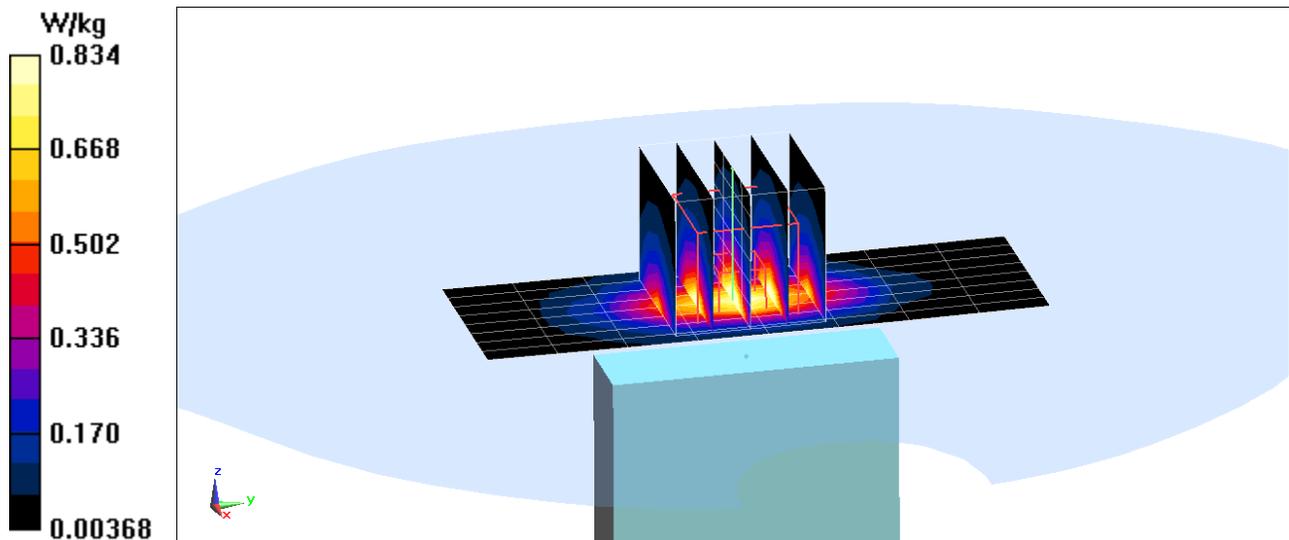

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5621B**

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2680$  MHz;  $\sigma = 2.307$  S/m;  $\epsilon_r = 51.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2680 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41, Body SAR, Back side, High.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.771 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.095 W/kg**

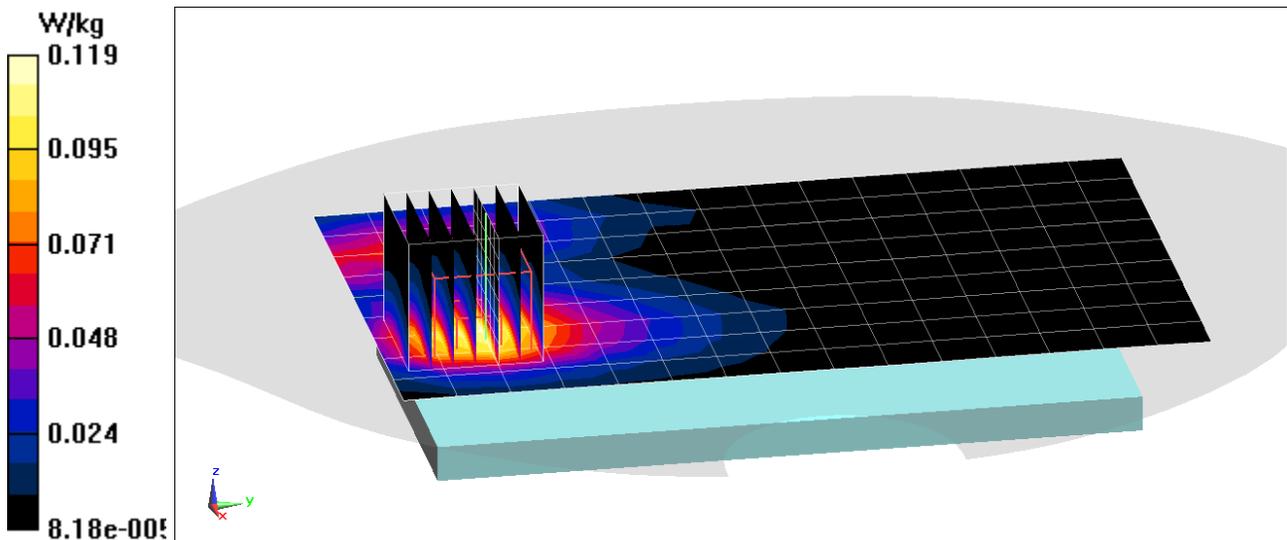

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5621B**

Communication System: UID 0, \_LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2680$  MHz;  $\sigma = 2.307$  S/m;  $\epsilon_r = 51.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2680 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41, Body SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.096 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.344 W/kg

**SAR(1 g) = 0.162 W/kg**

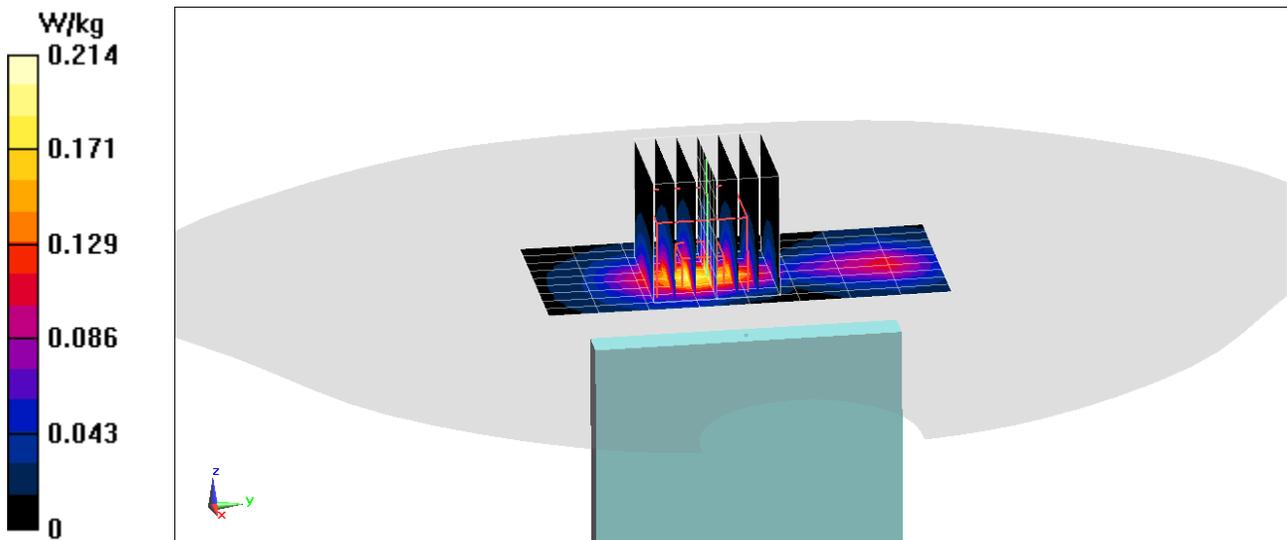

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9215B**


Communication System: UID 0, \_IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 2.019 \text{ S/m}$ ;  $\epsilon_r = 52.014$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-05-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2437 MHz; Calibrated: 3/13/2018  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/7/2018  
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, Antenna 2, 22 MHz Bandwidth,  
Body SAR, Ch 06, 1 Mbps, Back Side**

**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.309 V/m; Power Drift = 0.20 dB  
Peak SAR (extrapolated) = 0.136 W/kg  
**SAR(1 g) = 0.075 W/kg**

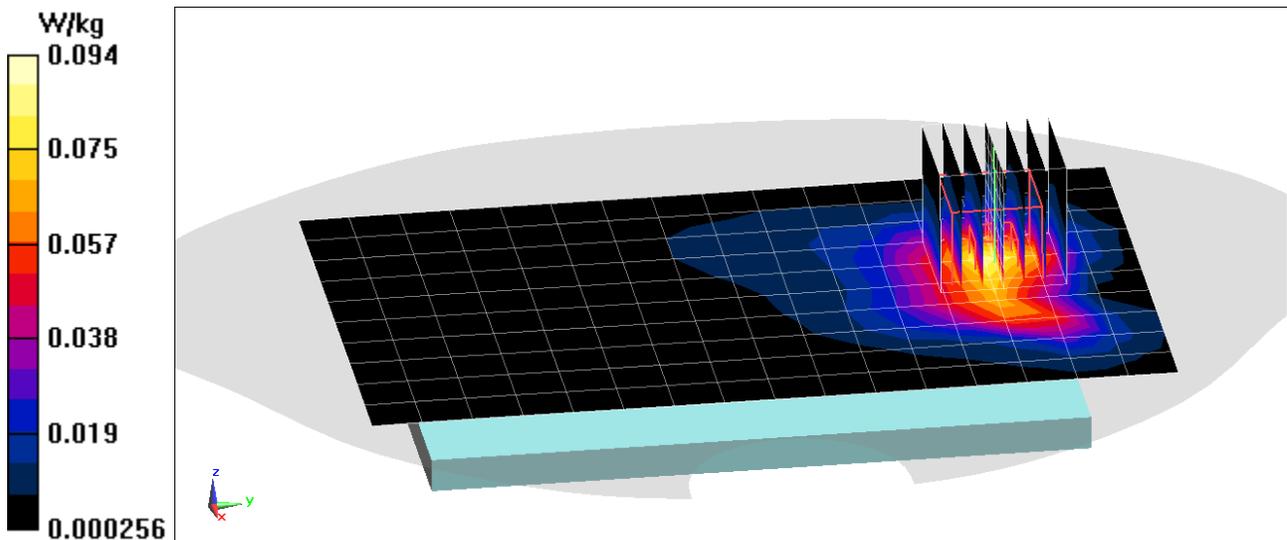

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 9215B**


Communication System: UID 0, \_IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 2.019 \text{ S/m}$ ;  $\epsilon_r = 52.014$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-05-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2437 MHz; Calibrated: 3/13/2018  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/7/2018  
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth,  
Body SAR, Ch 06, 1 Mbps, Left Edge**

**Area Scan (10x16x1):** Measurement grid: dx=5mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.158 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.441 W/kg  
**SAR(1 g) = 0.229 W/kg**

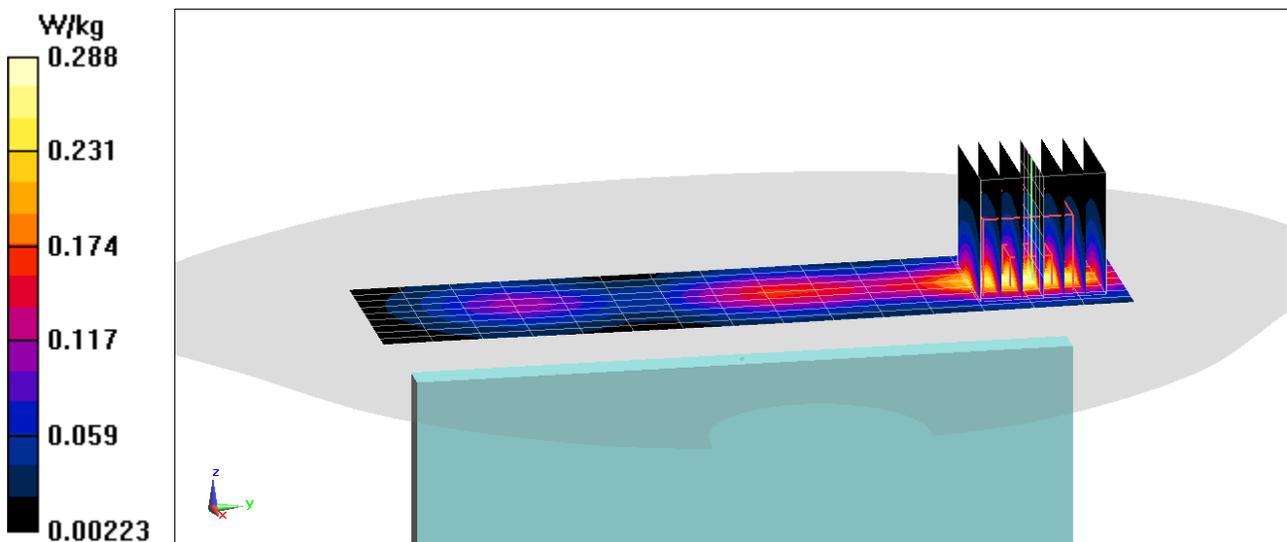

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8968B**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5720 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used (interpolated):  
 $f = 5720 \text{ MHz}$ ;  $\sigma = 6.115 \text{ S/m}$ ;  $\epsilon_r = 46.409$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-06-2019; Ambient Temp: 21.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.18, 4.18, 4.18) @ 5720 MHz; Calibrated: 8/23/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1558; Calibrated: 10/3/2018  
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11a, Antenna 2, UNII-2C, 20 MHz Bandwidth,  
Body SAR, Ch 144, 6 Mbps, Back Side**


**Area Scan (13x20x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 6.372 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.932 W/kg

**SAR(1 g) = 0.229 W/kg**

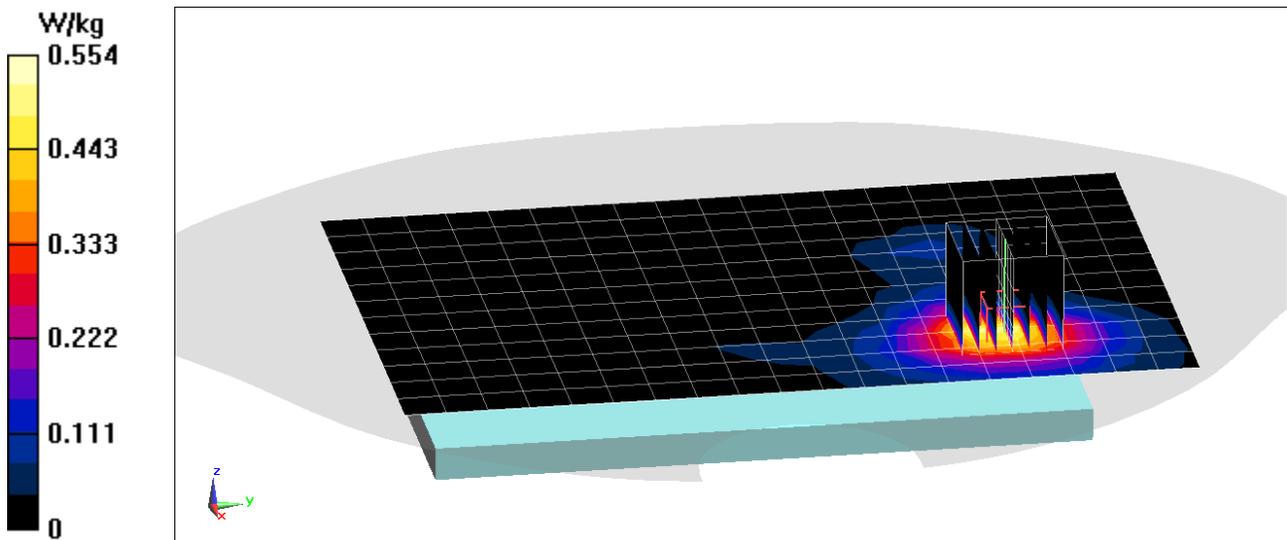

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8968B**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5745 \text{ MHz}$ ;  $\sigma = 6.156 \text{ S/m}$ ;  $\epsilon_r = 46.347$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-06-2019; Ambient Temp: 21.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.18, 4.18, 4.18) @ 5745 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11a, Antenna 2, UNII-3, 20 MHz Bandwidth,  
Body SAR, Ch 149, 6 Mbps, Back Side**


**Area Scan (13x20x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 7.536 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.338 W/kg**

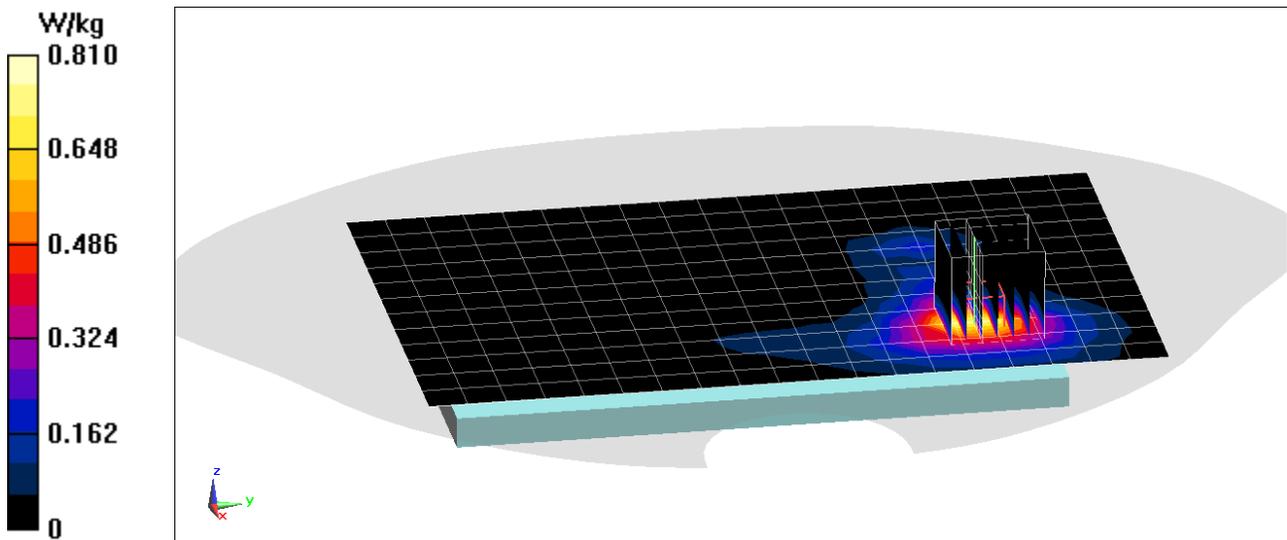

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8969B**

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.289  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2441$  MHz;  $\sigma = 2.016$  S/m;  $\epsilon_r = 51.969$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-07-2019; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2441 MHz; Calibrated: 3/13/2018  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/7/2018  
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.219 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.018 W/kg**

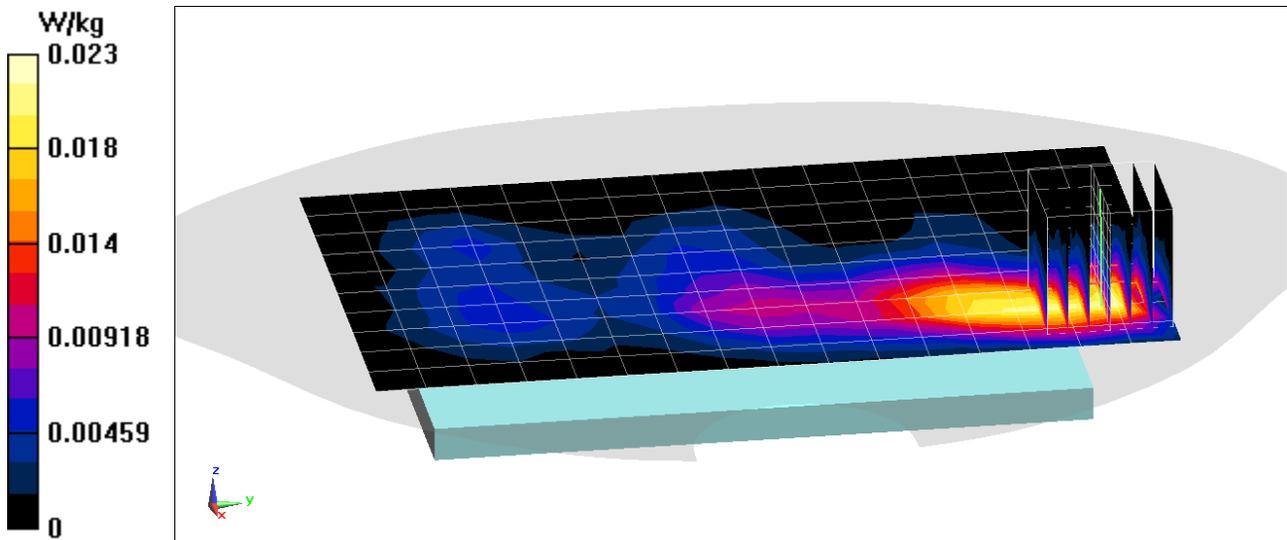

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8969B**

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.289

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441$  MHz;  $\sigma = 2.016$  S/m;  $\epsilon_r = 51.969$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-07-2019; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2441 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Left Edge**


**Area Scan (12x16x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.918 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.060 W/kg**

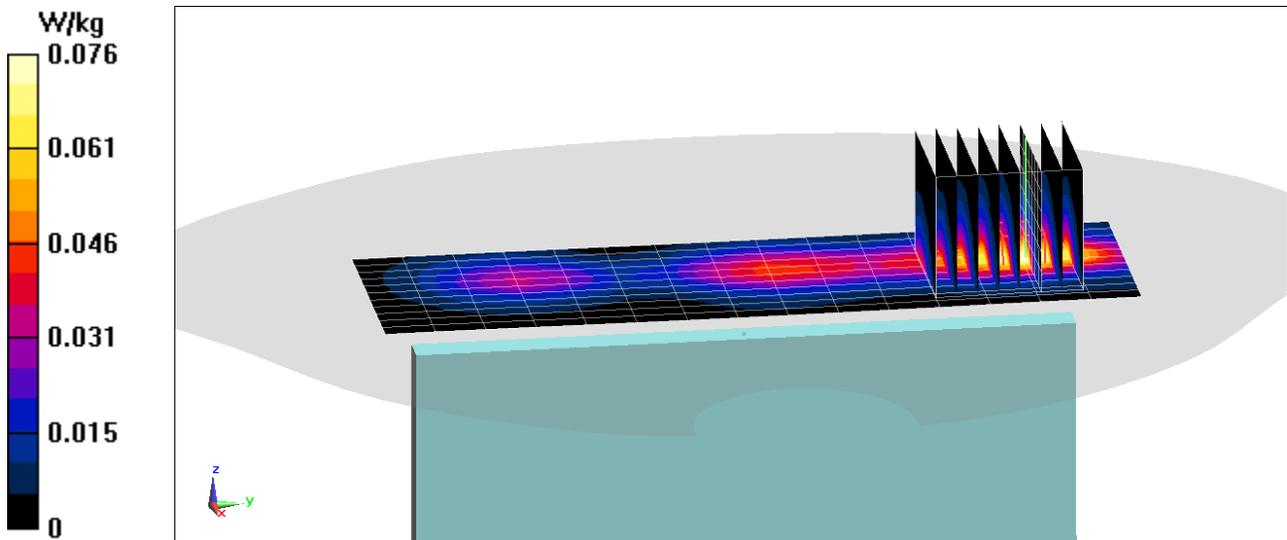

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5584B**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.977 \text{ S/m}$ ;  $\epsilon_r = 53.758$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 02-18-2019; Ambient Temp: 21.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 4/18/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1407; Calibrated: 4/11/2018  
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 850, Phablet SAR, Front side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.69 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.22 W/kg

**SAR(10 g) = 0.478 W/kg**

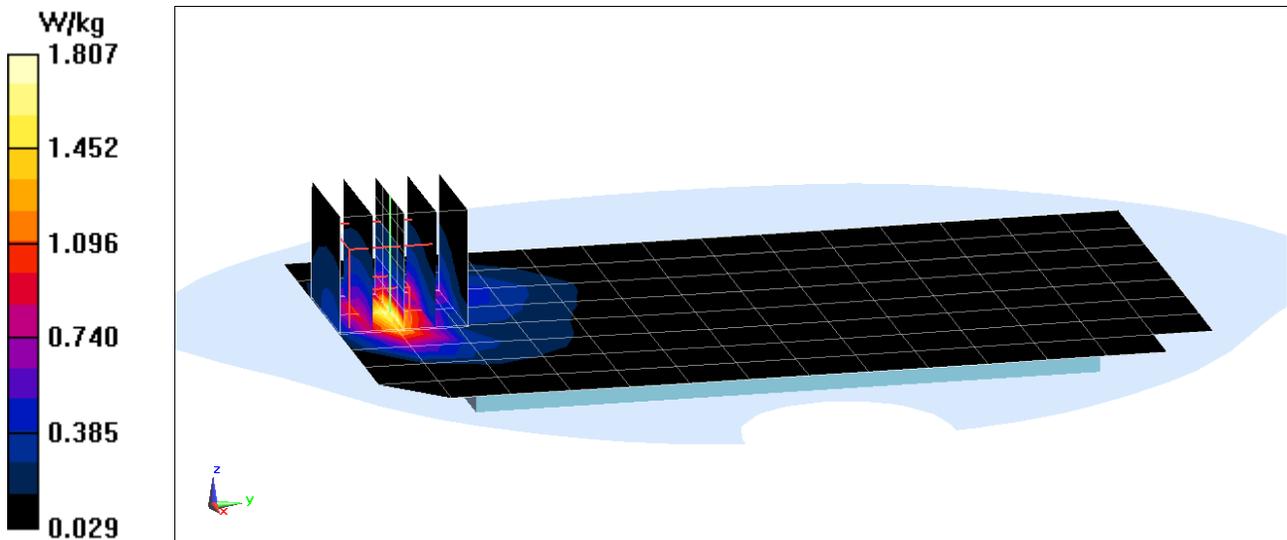

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 6428B**

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.413 \text{ S/m}$ ;  $\epsilon_r = 52.651$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1712.4 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1750, Phablet SAR, Bottom Edge, Low.ch**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.41 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 7.60 W/kg

**SAR(10 g) = 1.52 W/kg**

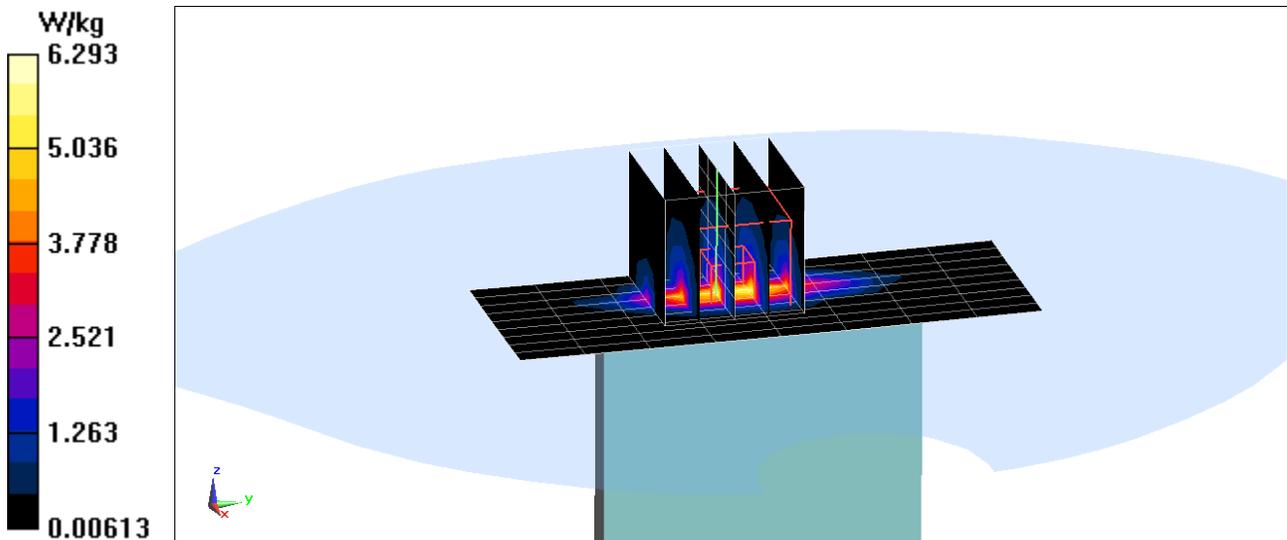

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**

Communication System: UID 0, \_UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.521 \text{ S/m}$ ;  $\epsilon_r = 53.469$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1852.4 MHz; Calibrated: 1/24/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1530; Calibrated: 1/15/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: UMTS 1900, Phablet SAR, Bottom Edge, Low.ch**


**Area Scan (11x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.75 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 6.80 W/kg

**SAR(10 g) = 1.21 W/kg**

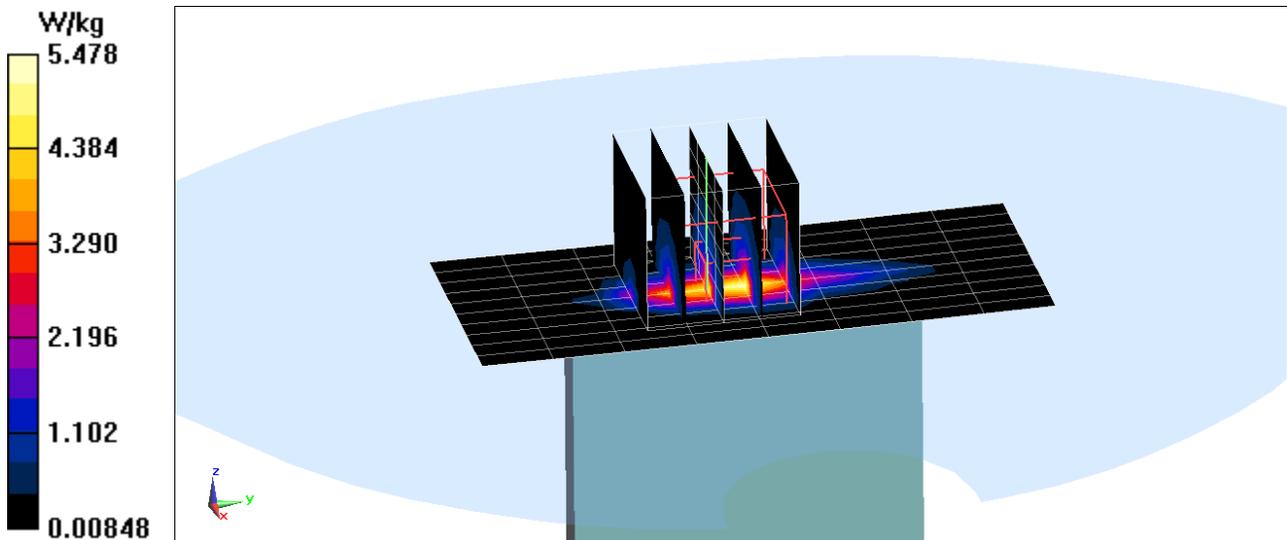

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5584B**


Communication System: UID 0, \_LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1720 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 52.624$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1720 MHz; Calibrated: 7/20/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Phablet SAR, Bottom Edge, Low.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 50.73 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 7.36 W/kg  
**SAR(10 g) = 1.5 W/kg**

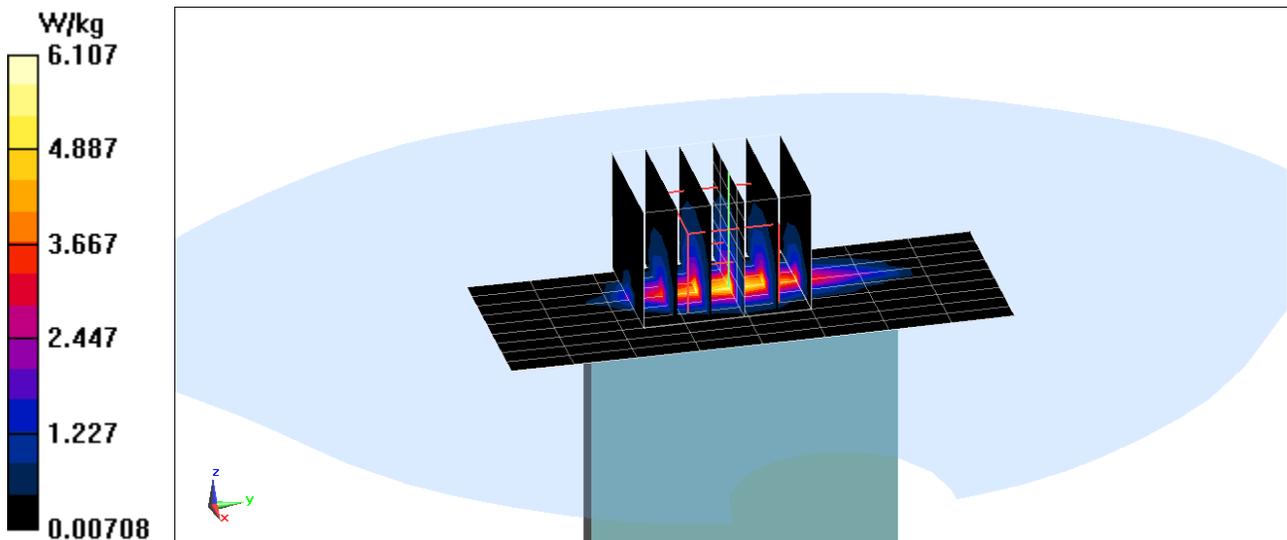

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5656B**


Communication System: UID 0, \_LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.557 \text{ S/m}$ ;  $\epsilon_r = 53.345$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1882.5 MHz; Calibrated: 1/24/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1530; Calibrated: 1/15/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 25 (PCS), Phablet SAR, Bottom Edge, Mid.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

**Area Scan (10x13x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 51.19 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 8.09 W/kg  
**SAR(10 g) = 1.42 W/kg**

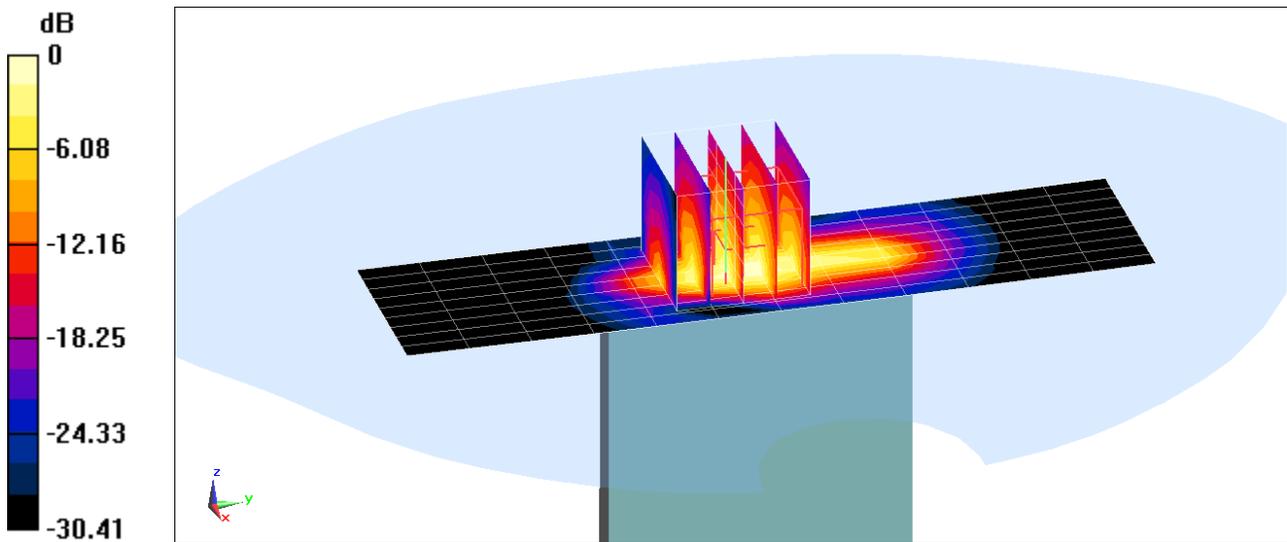

0 dB = 6.49 W/kg = 8.12 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 5621B**

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2680$  MHz;  $\sigma = 2.307$  S/m;  $\epsilon_r = 51.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2680 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 41, Phablet SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.57 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 8.37 W/kg

**SAR(10 g) = 0.690 W/kg**

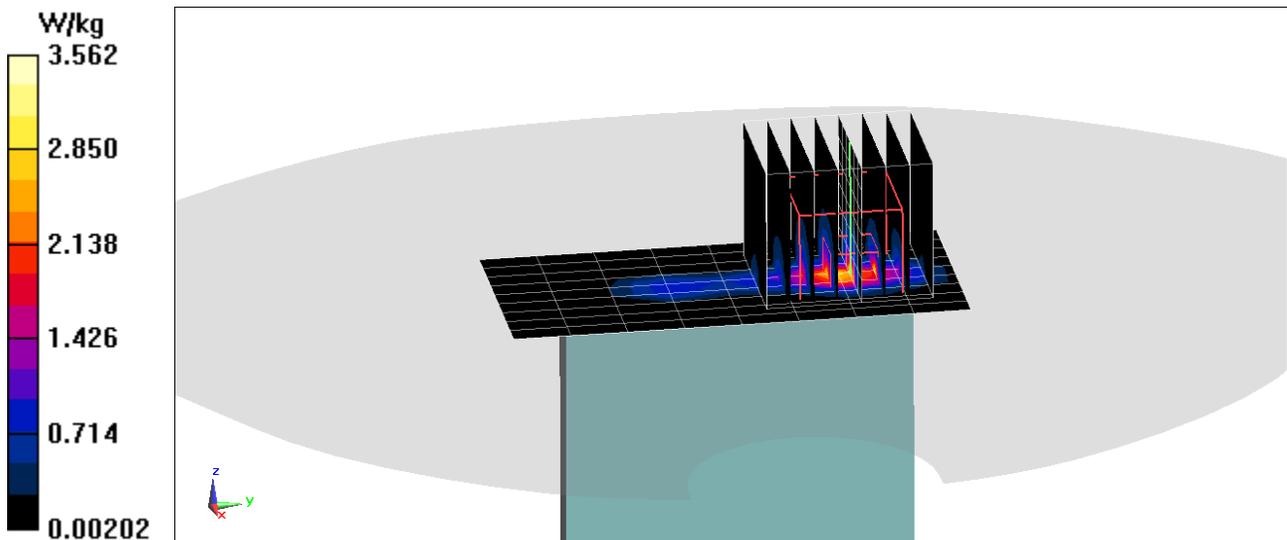

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMG977KOR; Type: Portable Handset; Serial: 8968B**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 5.926 \text{ S/m}$ ;  $\epsilon_r = 46.639$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 02-06-2019; Ambient Temp: 21.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4, 4, 4) @ 5600 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11a, Antenna 1, U-NII-2C,  
20 MHz Bandwidth, Phablet SAR, Ch 120, 6 Mbps,**


**Area Scan (13x20x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.3630 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 25.7 W/kg

**SAR(10 g) = 1.22 W/kg**

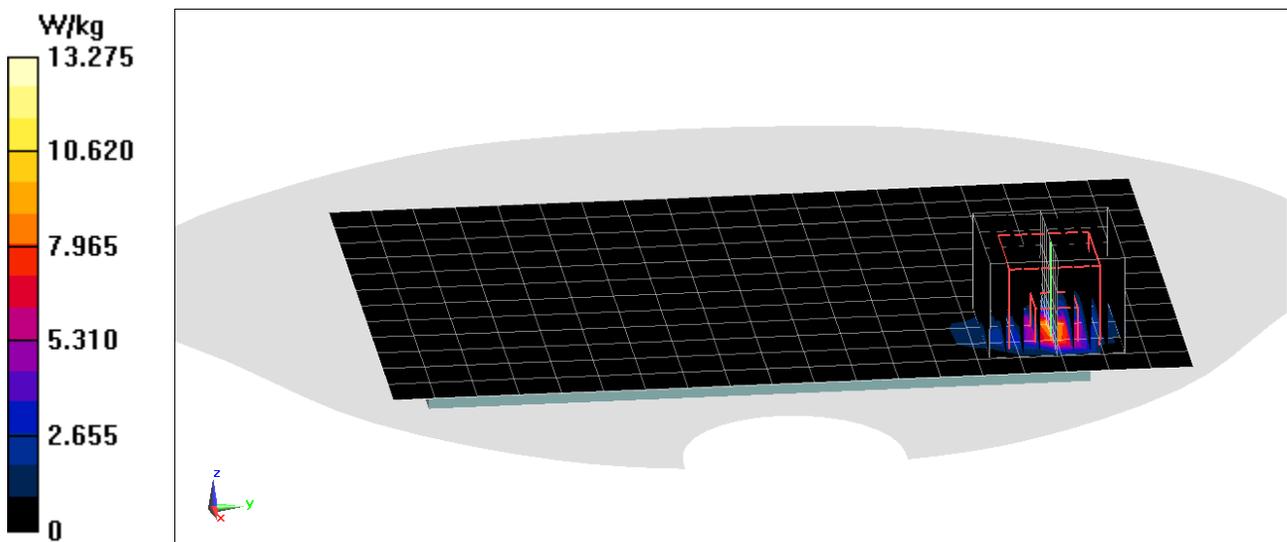

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.898 \text{ S/m}$ ;  $\epsilon_r = 41.921$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-14-2019; Ambient Temp: 22.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7410; ConvF(10.13, 10.13, 10.13) @ 750 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.54 W/kg

**SAR(1 g) = 1.71 W/kg**

Deviation(1 g) = 2.15%

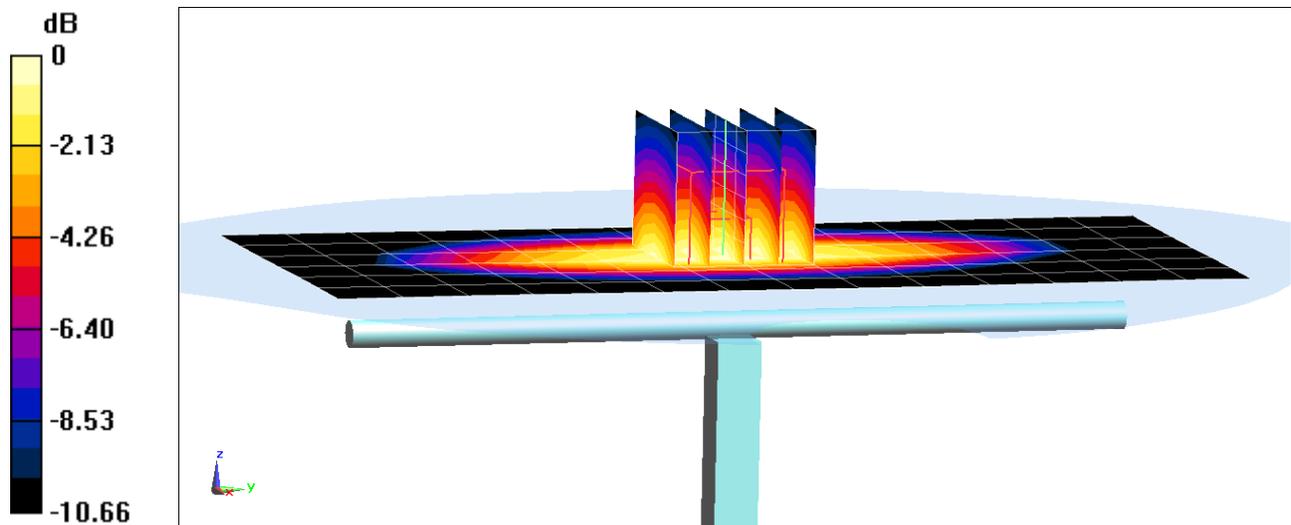

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 40.992$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-01-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 835 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.04 W/kg

**SAR(1 g) = 2 W/kg**

Deviation(1 g) = 5.60%

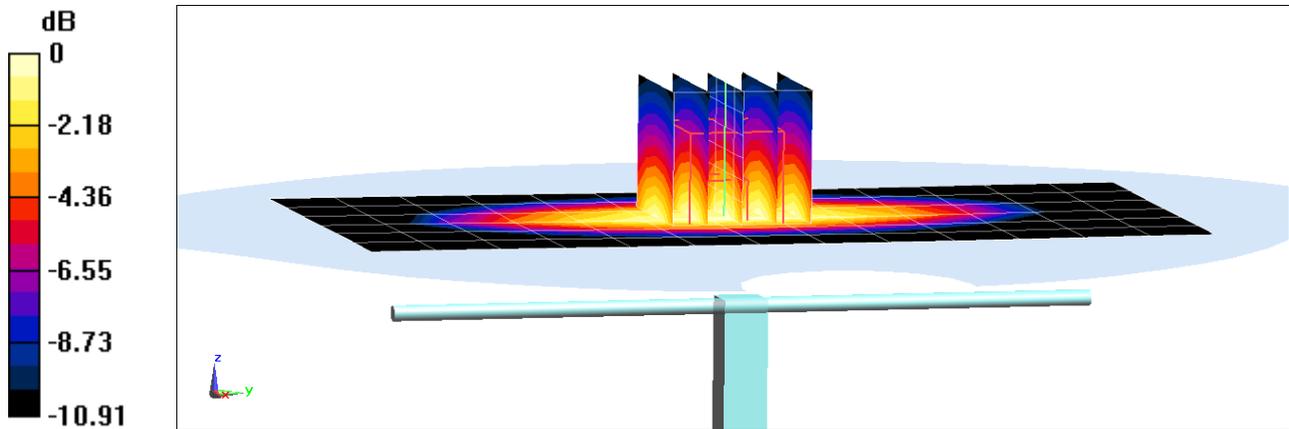

0 dB = 2.70 W/kg = 4.31 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.905 \text{ S/m}$ ;  $\epsilon_r = 40.726$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-04-2019; Ambient Temp: 21.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 835 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.04 W/kg

**SAR(1 g) = 1.97 W/kg**

Deviation(1 g) = 4.45%

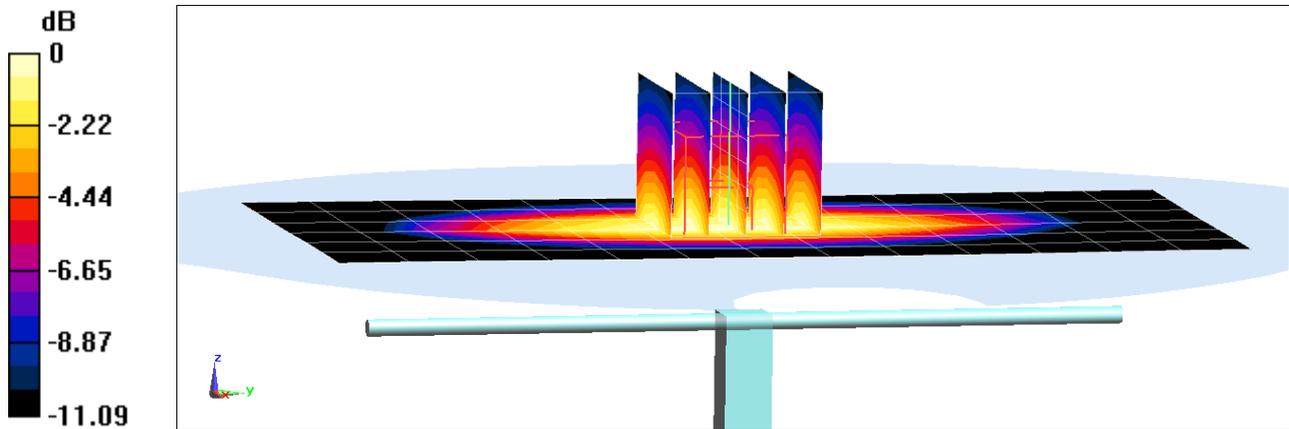

0 dB = 2.67 W/kg = 4.27 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.915 \text{ S/m}$ ;  $\epsilon_r = 41.145$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-08-2019; Ambient Temp: 21.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(9.81, 9.81, 9.81) @ 835 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.02 W/kg

**SAR(1 g) = 2.01 W/kg**

Deviation(1 g) = 6.57%

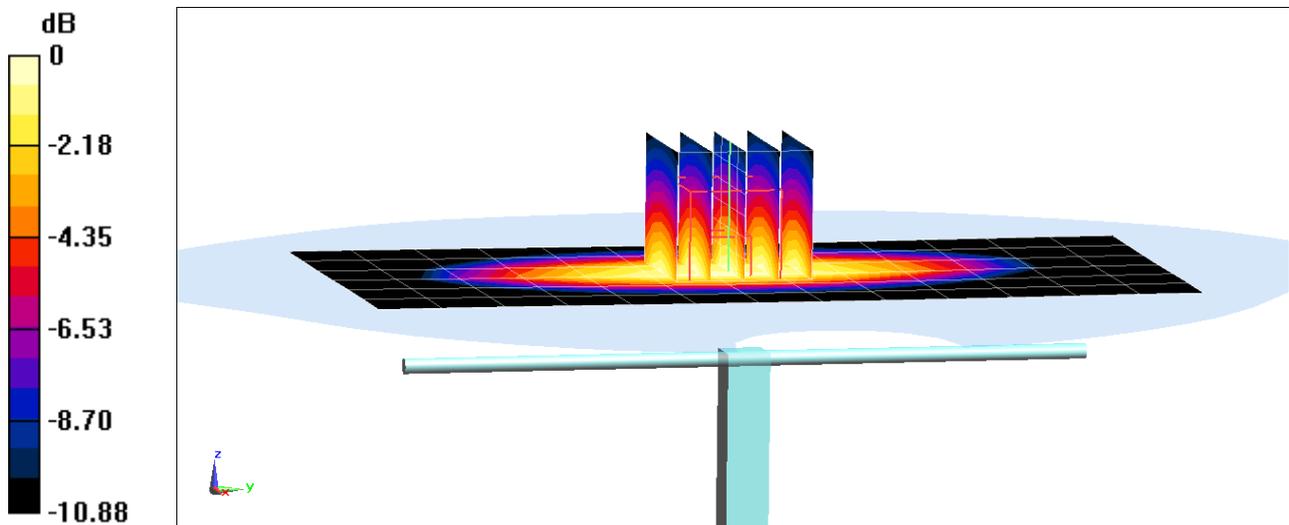

0 dB = 2.69 W/kg = 4.30 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.387 \text{ S/m}$ ;  $\epsilon_r = 41.854$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(8.43, 8.43, 8.43) @ 1750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.15 W/kg

**SAR(1 g) = 3.79 W/kg**

Deviation(1 g) = 4.70%

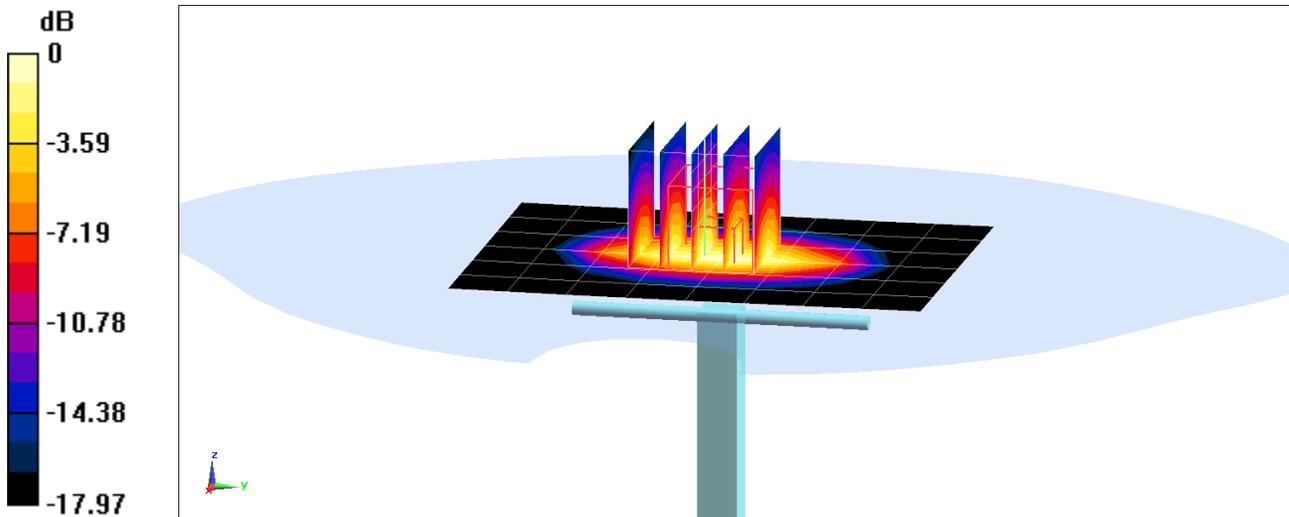

0 dB = 5.80 W/kg = 7.63 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.43 \text{ S/m}$ ;  $\epsilon_r = 38.55$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-04-2019; Ambient Temp: 21.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.24 W/kg

**SAR(1 g) = 3.95 W/kg**

Deviation(1 g) = 0.51%

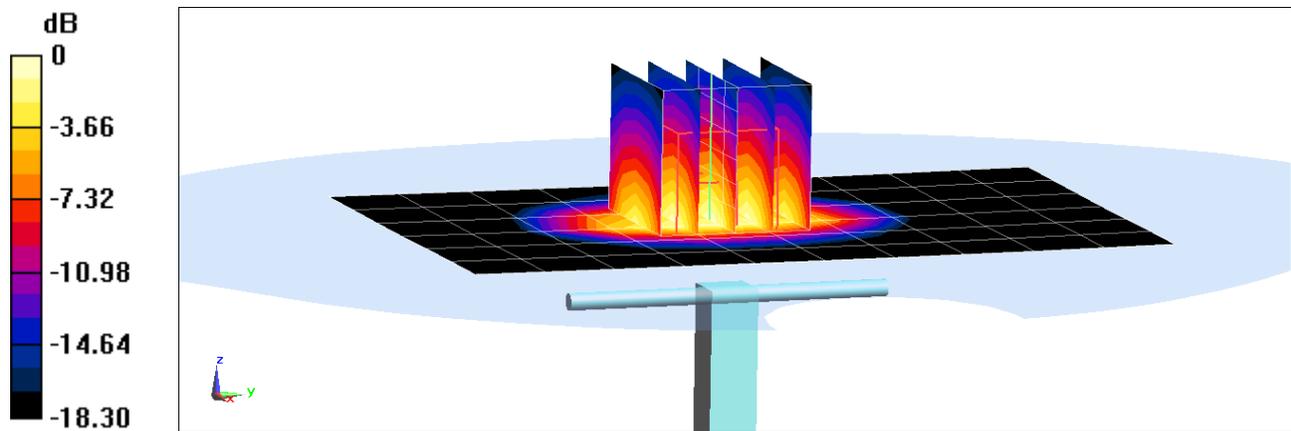

0 dB = 6.17 W/kg = 7.90 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 38.974$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-06-2019; Ambient Temp: 22.6°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.42 W/kg

**SAR(1 g) = 4.09 W/kg**

Deviation(1 g) = 4.07%

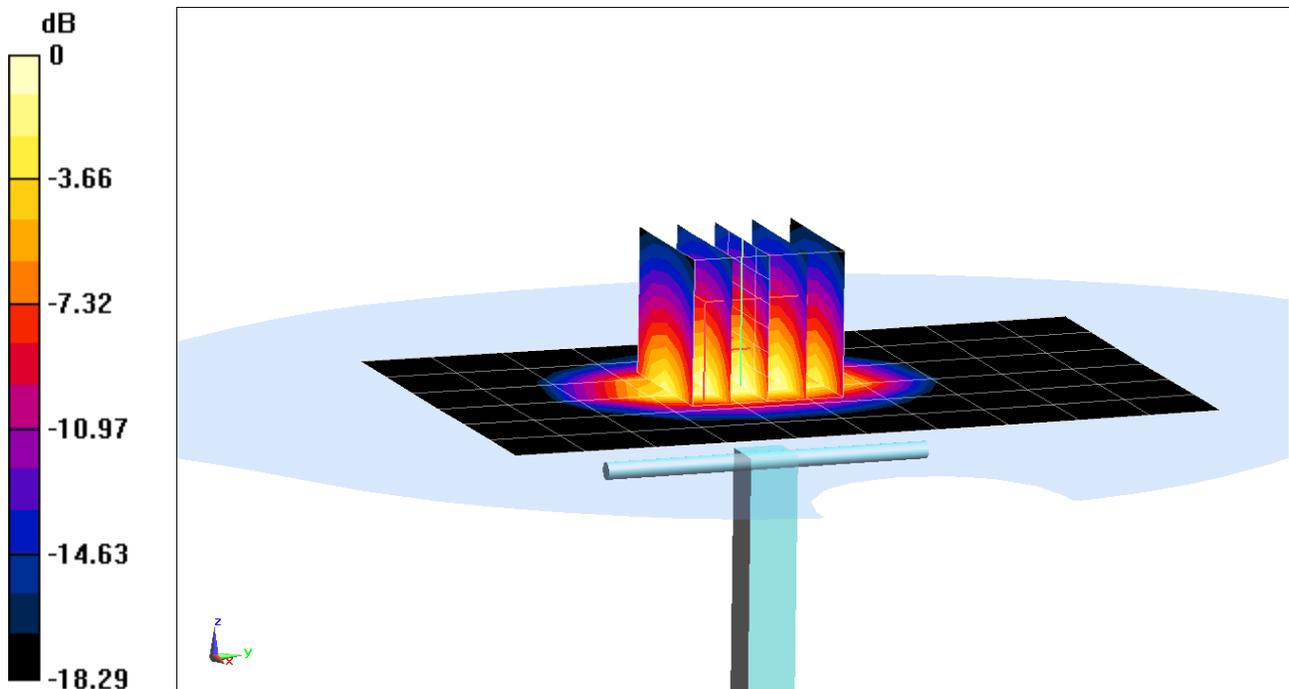

0 dB = 6.33 W/kg = 8.01 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.813 \text{ S/m}$ ;  $\epsilon_r = 40.397$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-21-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(6.46, 6.46, 6.46) @ 2450 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.3 W/kg

**SAR(1 g) = 4.87 W/kg**

Deviation(1 g) = -6.88%

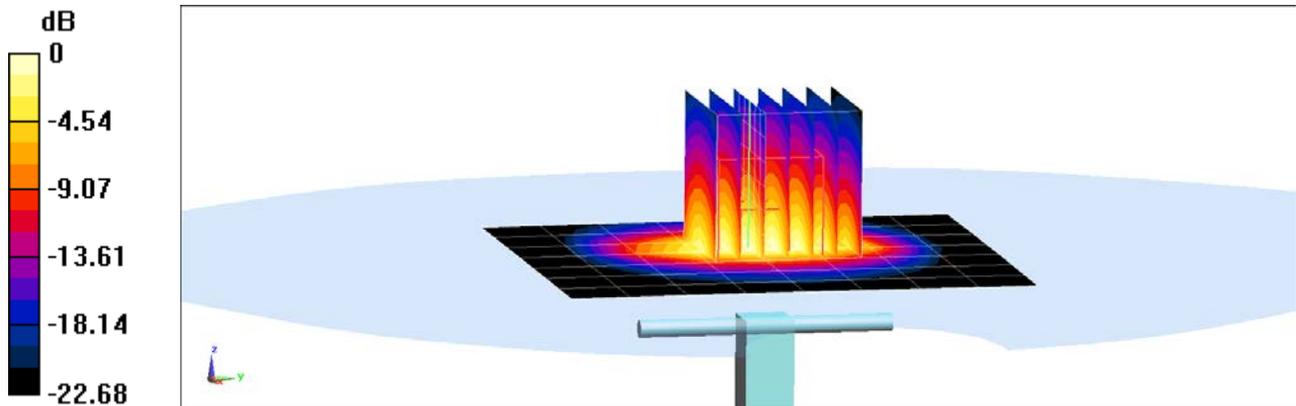

0 dB = 8.17 W/kg = 9.12 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2300-2700 Head Medium parameters used:

$f = 2450$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 39.498$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2019; Ambient Temp: 21.8°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(6.46, 6.46, 6.46) @ 2450 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

**SAR(1 g) = 5.26 W/kg**

Deviation(1 g) = 1.35%

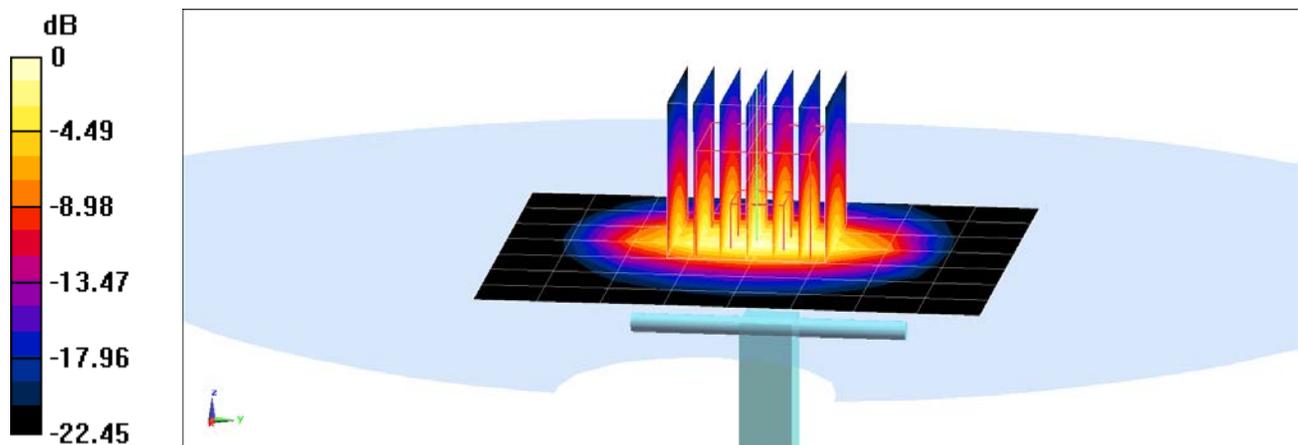

0 dB = 8.93 W/kg = 9.51 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2300-2600 Head Medium parameters used:

$f = 2600$  MHz;  $\sigma = 1.909$  S/m;  $\epsilon_r = 38.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-05-2019; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF(7.24, 7.24, 7.24) @ 2600 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 5.31 W/kg**

Deviation(1 g) = -5.01%

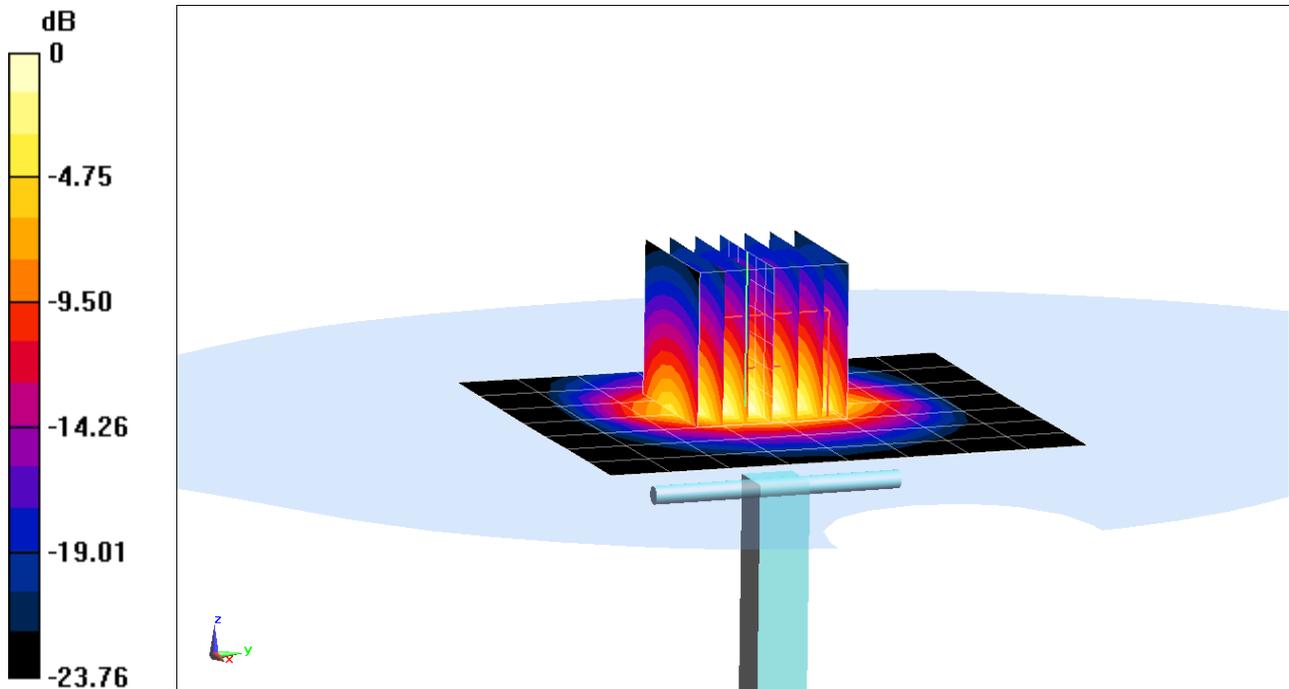

0 dB = 9.16 W/kg = 9.62 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$ ;  $\sigma = 4.573 \text{ S/m}$ ;  $\epsilon_r = 34.883$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-19-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(5.2, 5.2, 5.2) @ 5250 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.7 W/kg

**SAR(1 g) = 3.84 W/kg**

Deviation(1 g) = -5.54%

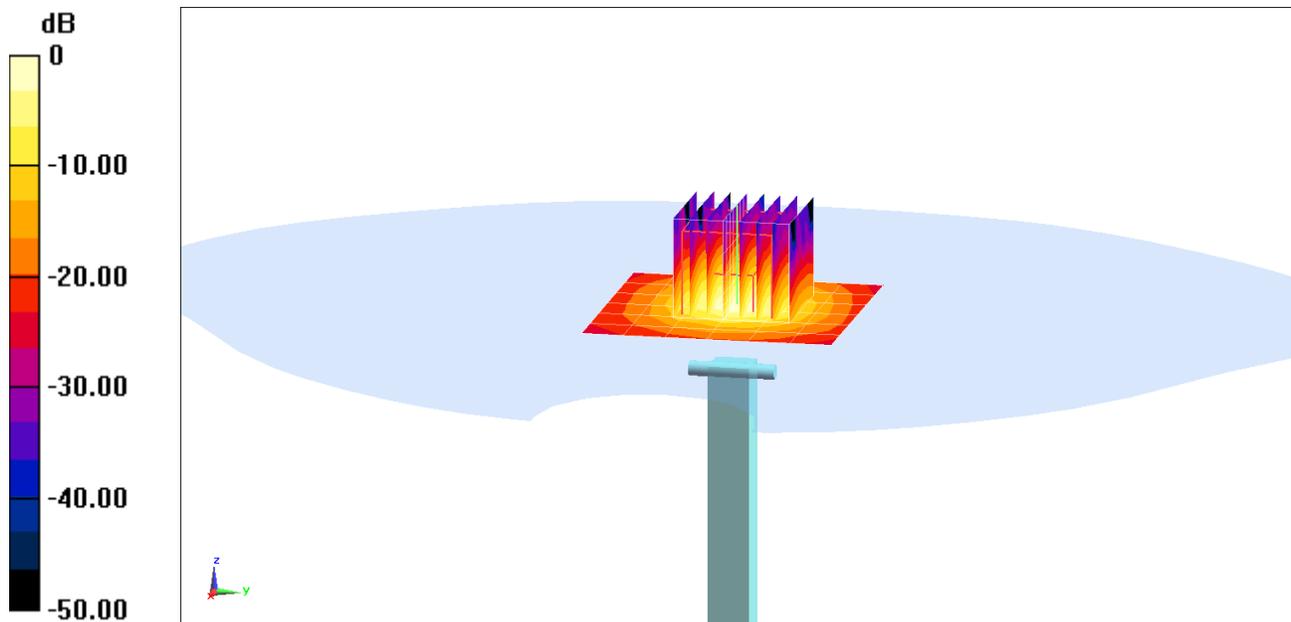

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600$  MHz;  $\sigma = 4.978$  S/m;  $\epsilon_r = 34.279$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-19-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(4.77, 4.77, 4.77) @ 5600 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 4.17 W/kg**

Deviation(1 g) = -2.68%

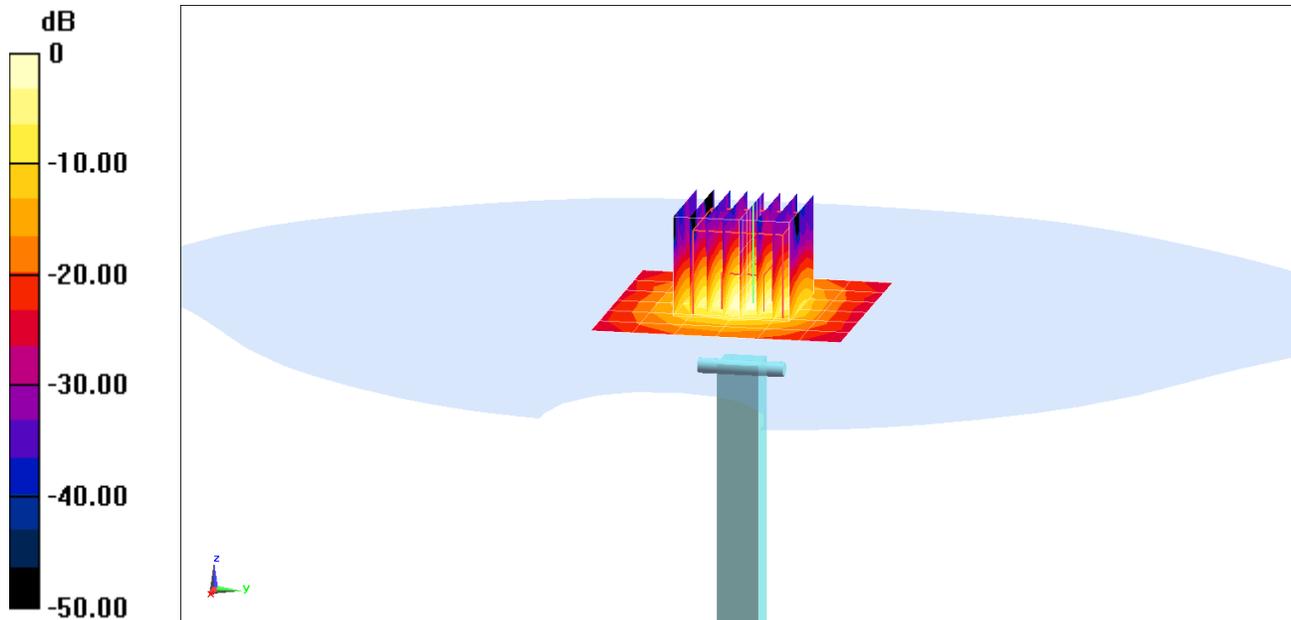

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$ ;  $\sigma = 5.17 \text{ S/m}$ ;  $\epsilon_r = 34.038$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-19-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7409; ConvF(4.82, 4.82, 4.82) @ 5750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 3.75 W/kg**

Deviation(1 g) = -6.95%

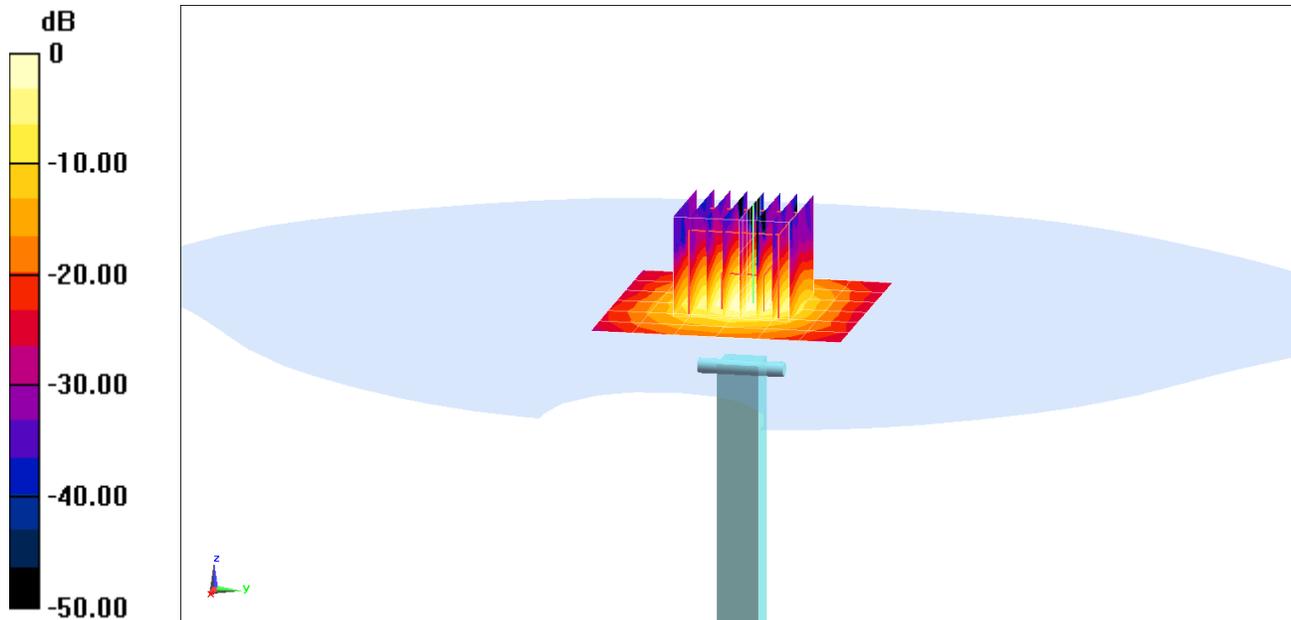

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.976 \text{ S/m}$ ;  $\epsilon_r = 53.193$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3589; ConvF(8.34, 8.34, 8.34) @ 750 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.71 W/kg

**SAR(1 g) = 1.72 W/kg**

Deviation(1 g) = 0.23%

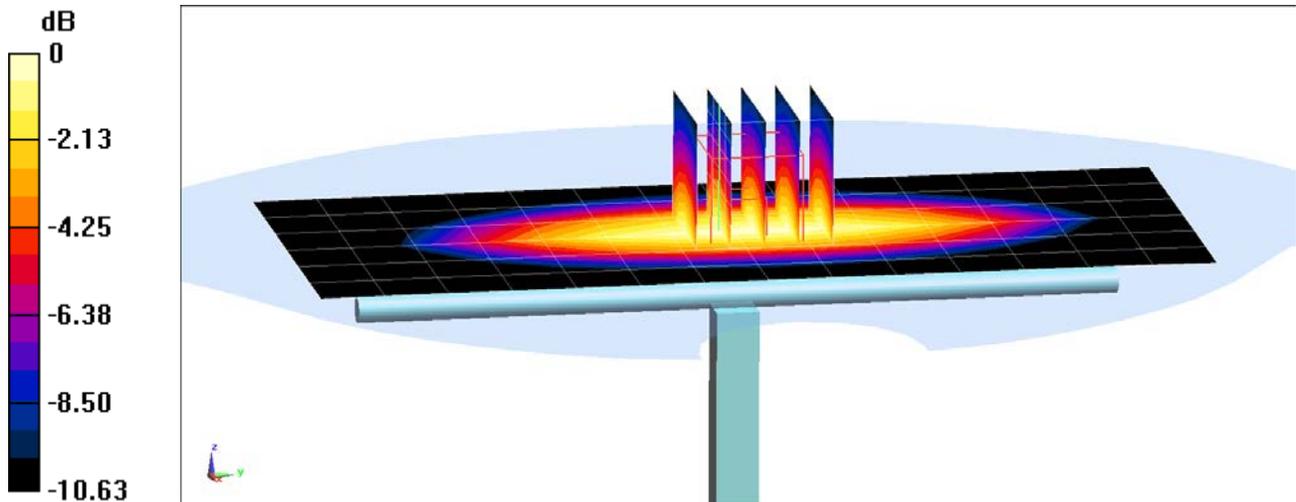

0 dB = 2.35 W/kg = 3.71 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.946 \text{ S/m}$ ;  $\epsilon_r = 53.85$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-25-2019; Ambient Temp: 21.8°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN3589; ConvF(8.34, 8.34, 8.34) @ 750 MHz; Calibrated: 1/25/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/22/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.63 W/kg

**SAR(1 g) = 1.73 W/kg**

Deviation(1 g) = 0.82%

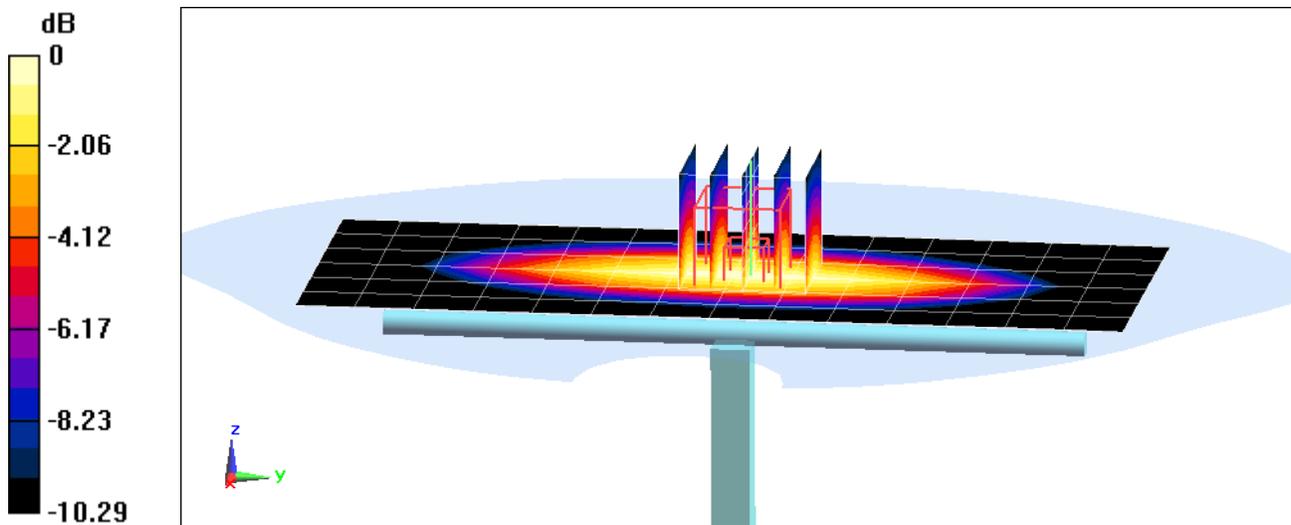

0 dB = 2.31 W/kg = 3.64 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.972 \text{ S/m}$ ;  $\epsilon_r = 54.098$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-04-2019; Ambient Temp: 22.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 835 MHz; Calibrated: 4/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.96 W/kg

**SAR(1 g) = 1.98 W/kg**

Deviation(1 g) = 1.96%

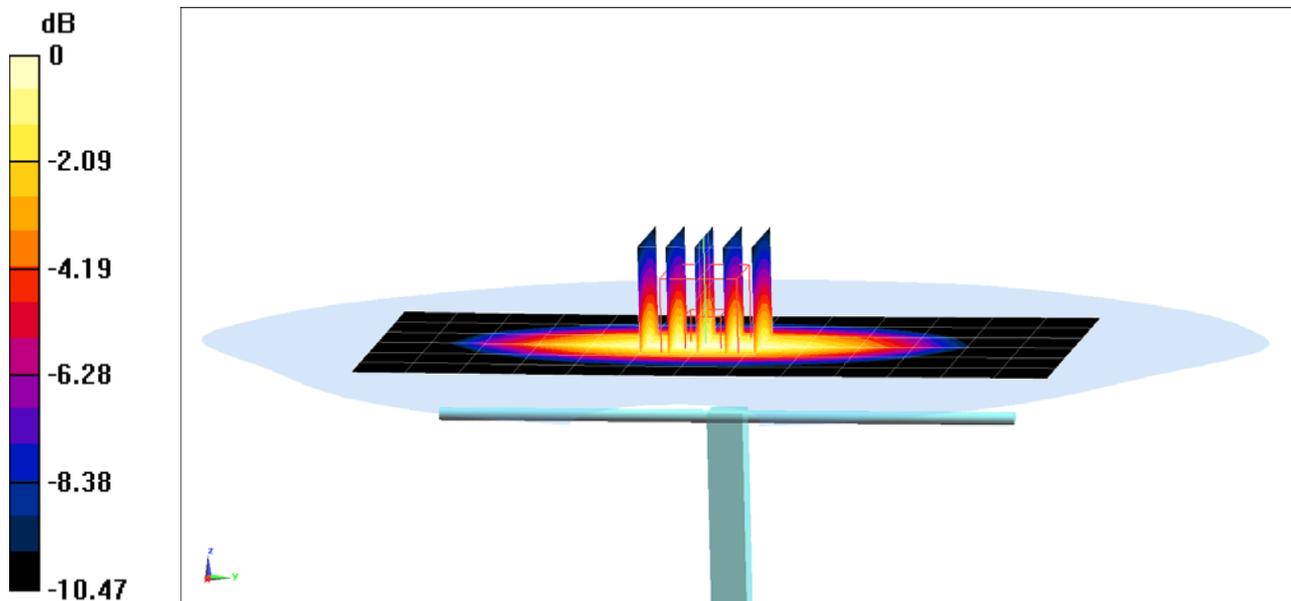

0 dB = 2.64 W/kg = 4.22 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.975 \text{ S/m}$ ;  $\epsilon_r = 53.775$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-18-2019; Ambient Temp: 21.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 835 MHz; Calibrated: 4/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.09 W/kg

**SAR(10 g) = 1.35 W/kg**

Deviation(10 g) = 6.13%

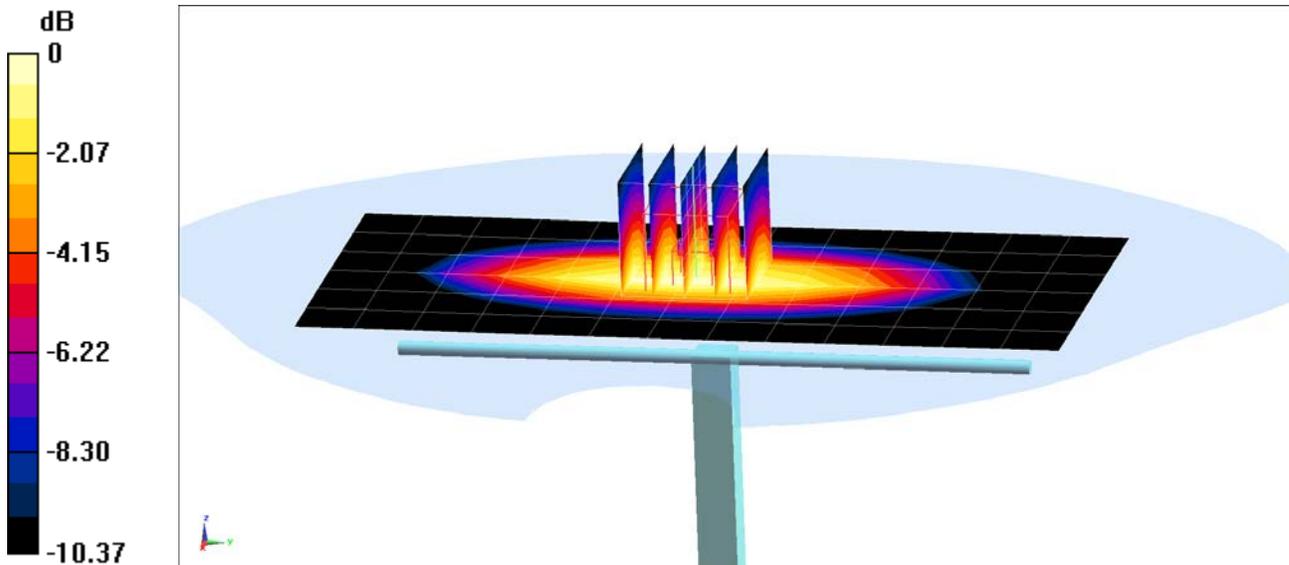

0 dB = 2.74 W/kg = 4.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.984 \text{ S/m}$ ;  $\epsilon_r = 54.264$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-25-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.17, 10.17, 10.17) @ 835 MHz; Calibrated: 4/18/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.09 W/kg

**SAR(1 g) = 2.07 W/kg**

Deviation(1 g) = 6.59%

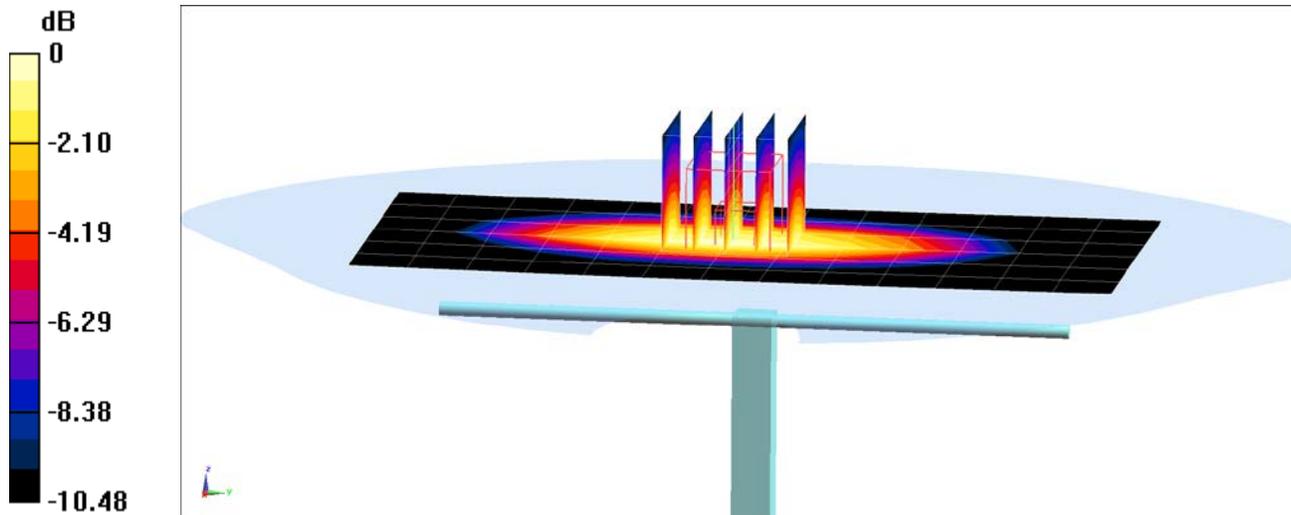

0 dB = 2.74 W/kg = 4.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$  MHz;  $\sigma = 1.457$  S/m;  $\epsilon_r = 52.518$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 2-20-2019; Ambient Temp: 21.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.06, 8.06, 8.06) @ 1750 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.80 W/kg

**SAR(1 g) = 3.78 W/kg; SAR(10 g) = 2.01 W/kg**

Deviation(1 g) = 3.28%; Deviation(10 g) = 3.61%

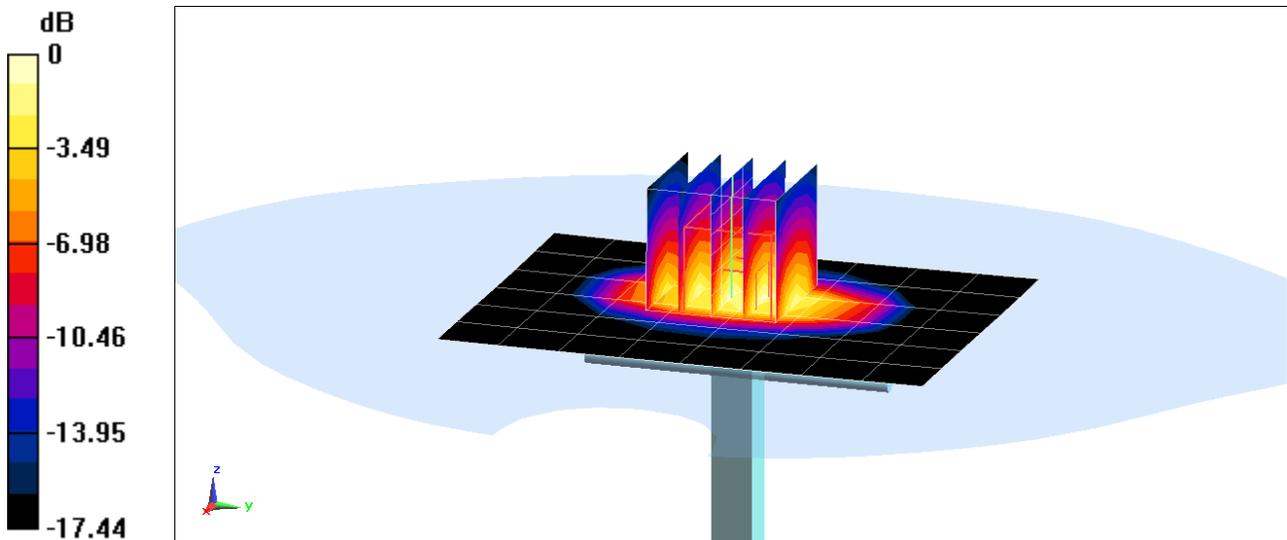

0 dB = 5.71 W/kg = 7.57 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$  MHz;  $\sigma = 1.579$  S/m;  $\epsilon_r = 53.264$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1900 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.76 W/kg

**SAR(1 g) = 4.18 W/kg; SAR(10 g) = 2.14 W/kg**

Deviation(1 g) = 6.09%; Deviation(10 g) = 3.38%

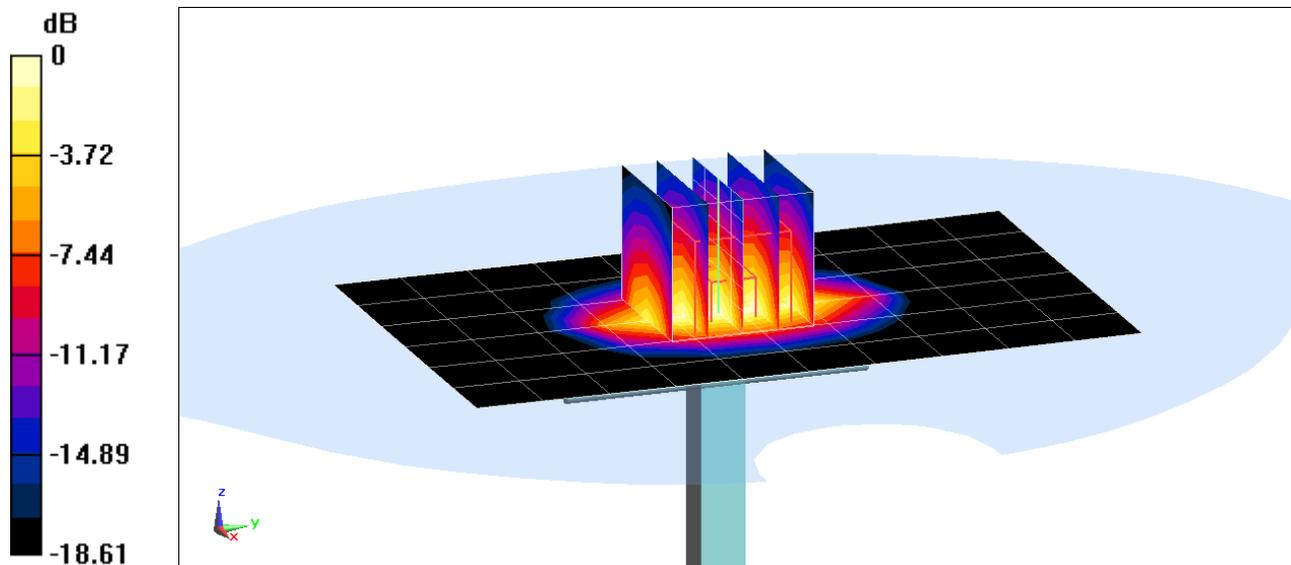

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$  MHz;  $\sigma = 1.559$  S/m;  $\epsilon_r = 52.353$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-14-2019; Ambient Temp: 21.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1900 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.65 W/kg

**SAR(1 g) = 4.04 W/kg**

Deviation(1 g) = 3.06%

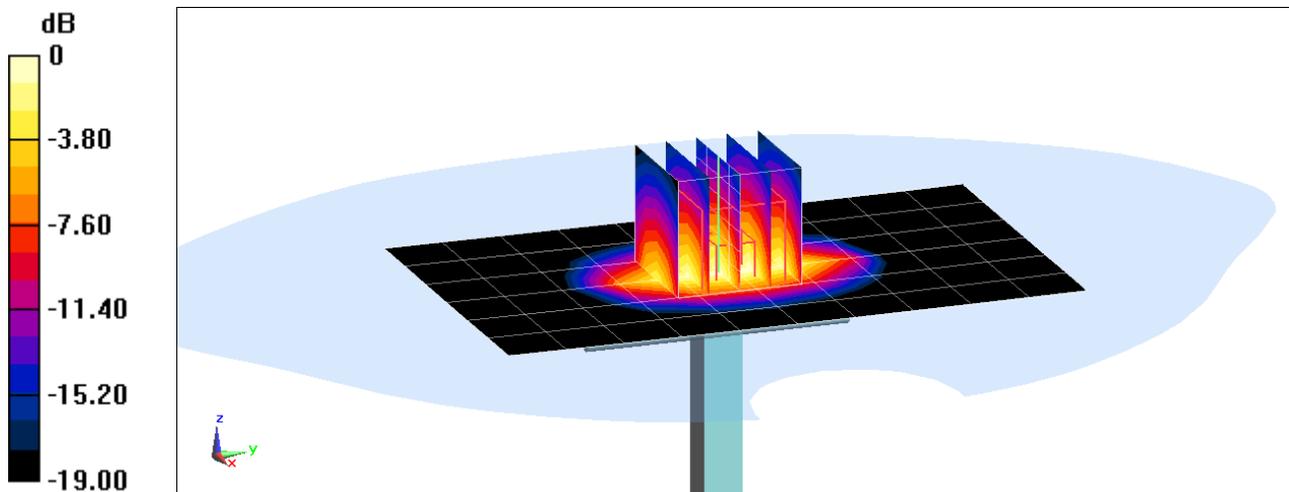

0 dB = 6.32 W/kg = 8.01 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450$  MHz;  $\sigma = 2.035$  S/m;  $\epsilon_r = 51.977$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-05-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2450 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.2 W/kg

**SAR(1 g) = 4.95 W/kg**

Deviation(1 g) = -2.75%

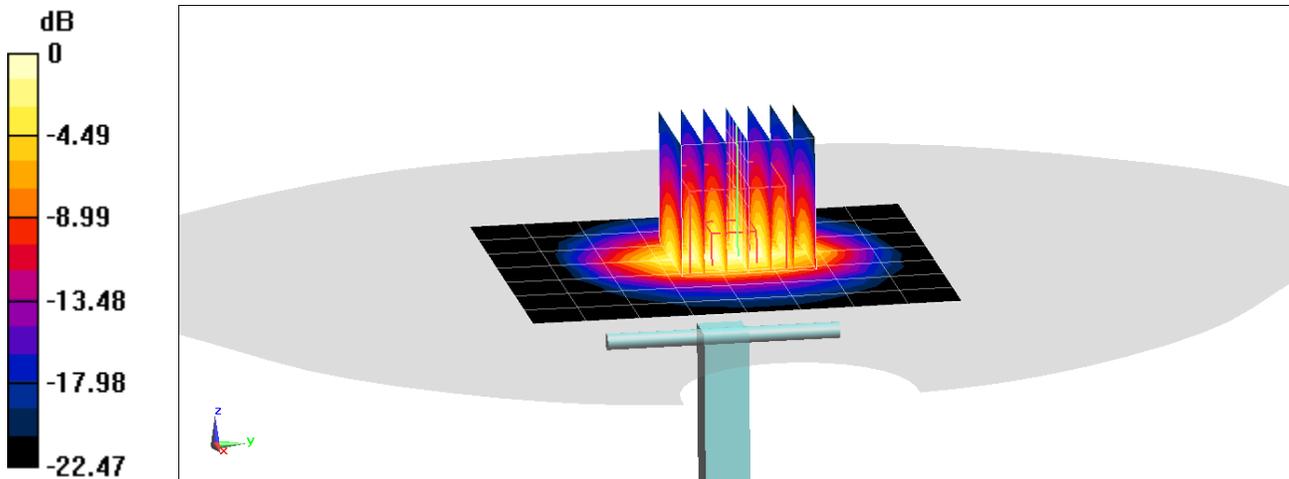

0 dB = 6.51 W/kg = 8.14 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450$  MHz;  $\sigma = 2.026$  S/m;  $\epsilon_r = 51.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-07-2019; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2450 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.5 W/kg

**SAR(1 g) = 5.08 W/kg**

Deviation(1 g) = -0.20%

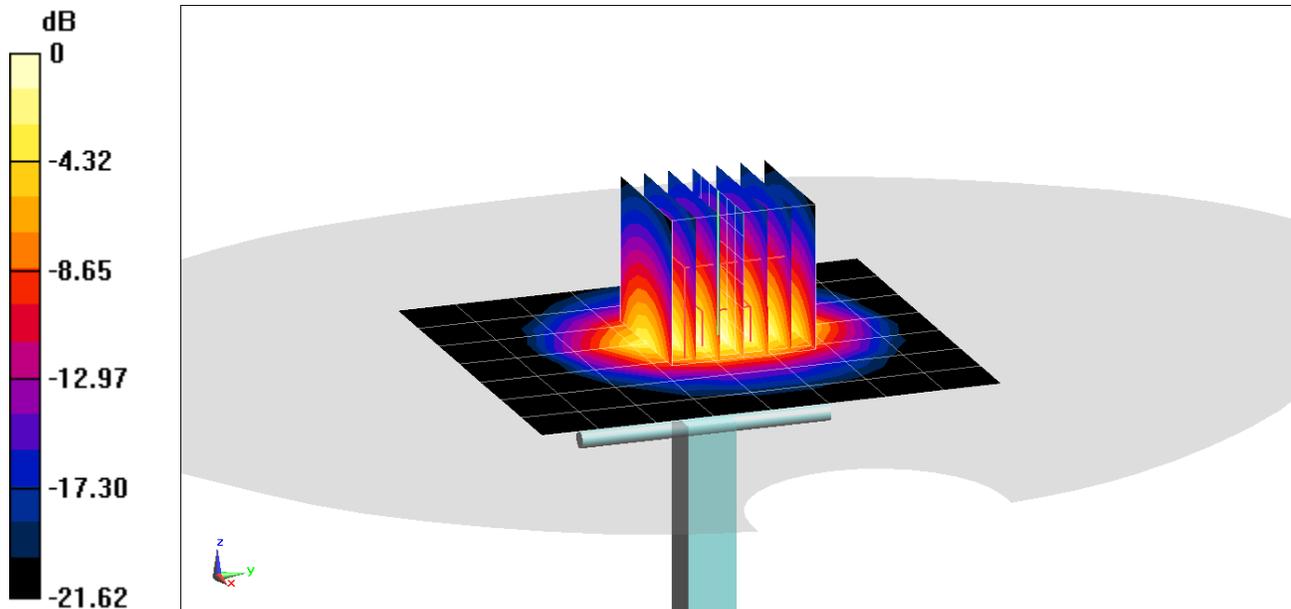

0 dB = 6.77 W/kg = 8.31 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.212$  S/m;  $\epsilon_r = 51.524$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-11-2019; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2600 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

**SAR(1 g) = 5.18 W/kg; SAR(10 g) = 2.29 W/kg**

Deviation(1 g) = -5.47%; Deviation(10 g) = -7.29%

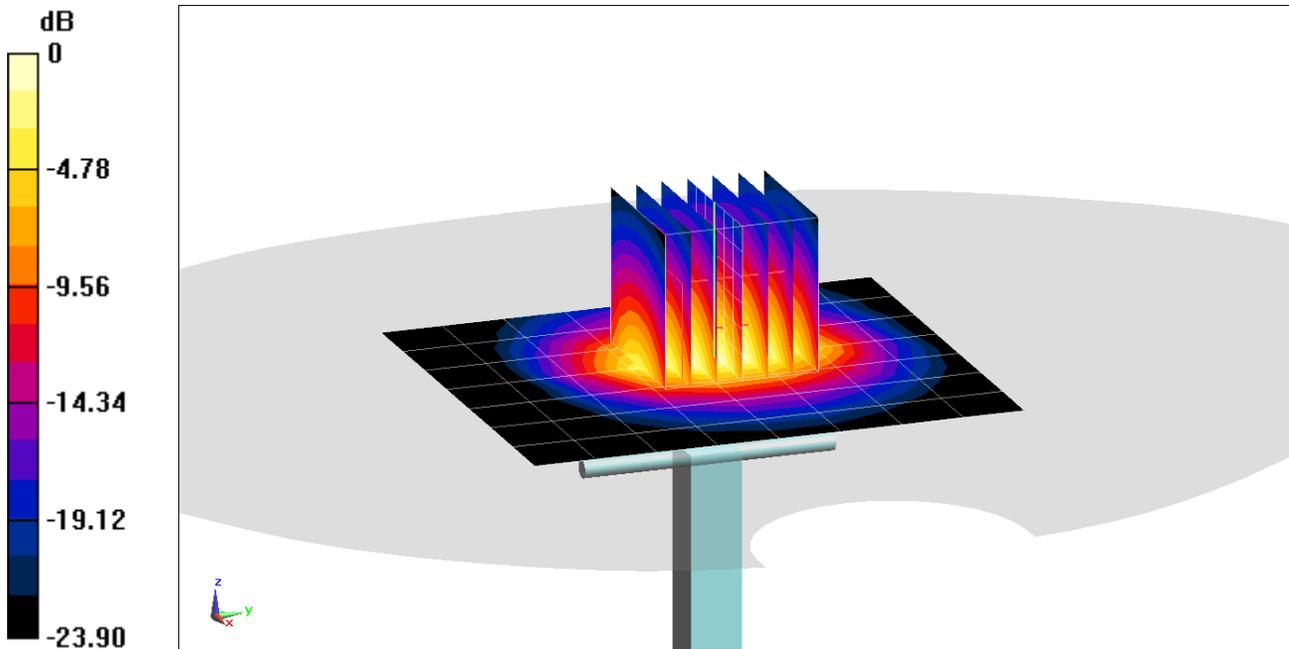

0 dB = 6.82 W/kg = 8.34 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5600 MHz, Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5250 \text{ MHz}$ ;  $\sigma = 5.427 \text{ S/m}$ ;  $\epsilon_r = 47.312$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-06-2019; Ambient Temp: 21.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.48, 4.48, 4.48) @ 5250 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.4 W/kg

**SAR(1 g) = 3.58 W/kg; SAR(10 g) = 0.990 W/kg**

Deviation(1 g) = -5.67%; Deviation(10 g) = -6.16%

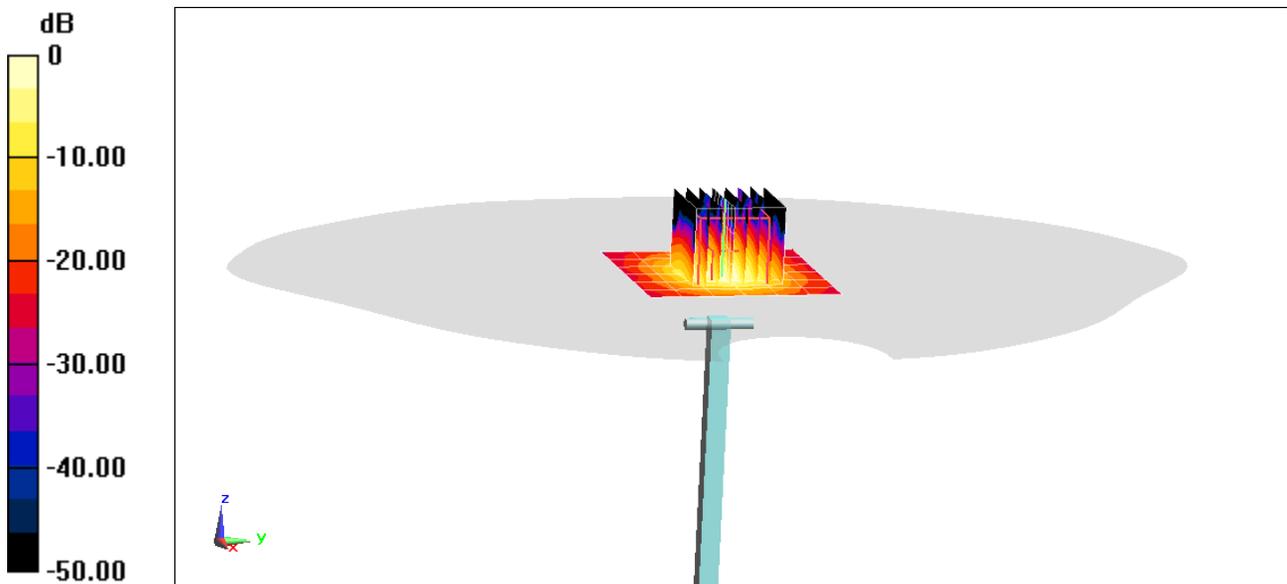

0 dB = 8.67 W/kg = 9.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5600 \text{ MHz}$ ;  $\sigma = 5.926 \text{ S/m}$ ;  $\epsilon_r = 46.639$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-06-2019; Ambient Temp: 21.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4, 4, 4) @ 5600 MHz; Calibrated: 8/23/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 10/3/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.7 W/kg

**SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.07 W/kg**

Deviation(1 g) = -1.63%; Deviation(10 g) = -4.04%

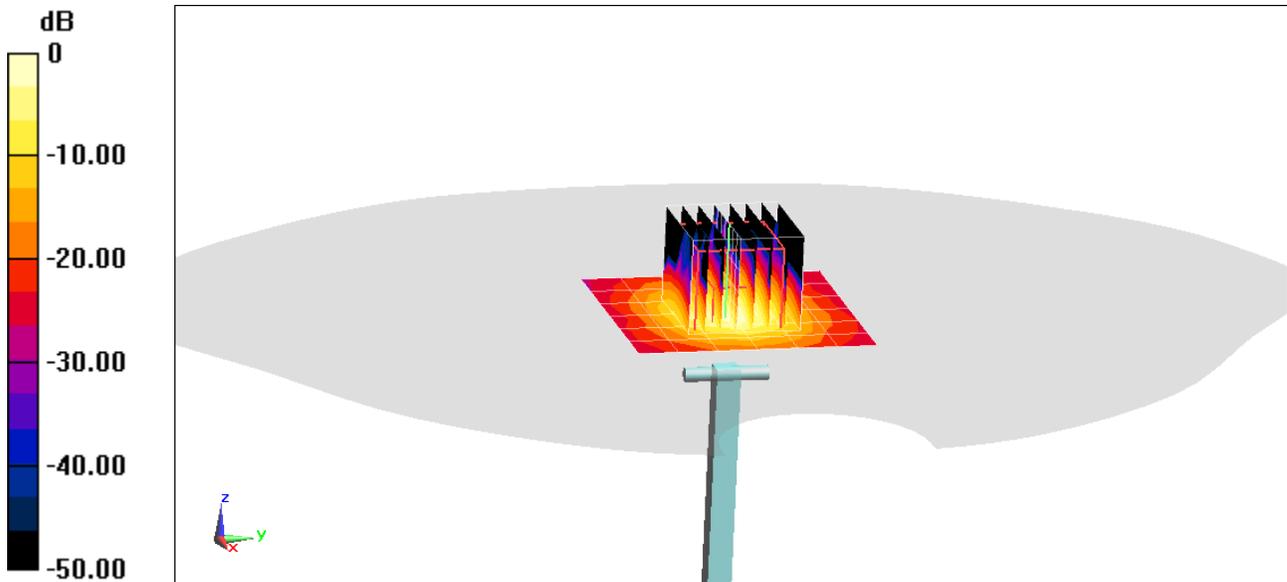

0 dB = 9.77 W/kg = 9.90 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used (interpolated):  
 $f = 5750 \text{ MHz}$ ;  $\sigma = 6.166 \text{ S/m}$ ;  $\epsilon_r = 46.336$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-06-2019; Ambient Temp: 21.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.18, 4.18, 4.18) @ 5750 MHz; Calibrated: 8/23/2018  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1558; Calibrated: 10/3/2018  
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630  
Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.3 W/kg

**SAR(1 g) = 3.52 W/kg; SAR(10 g) = 0.975 W/kg**

Deviation(1 g) = -8.21%; Deviation(10 g) = -8.02%

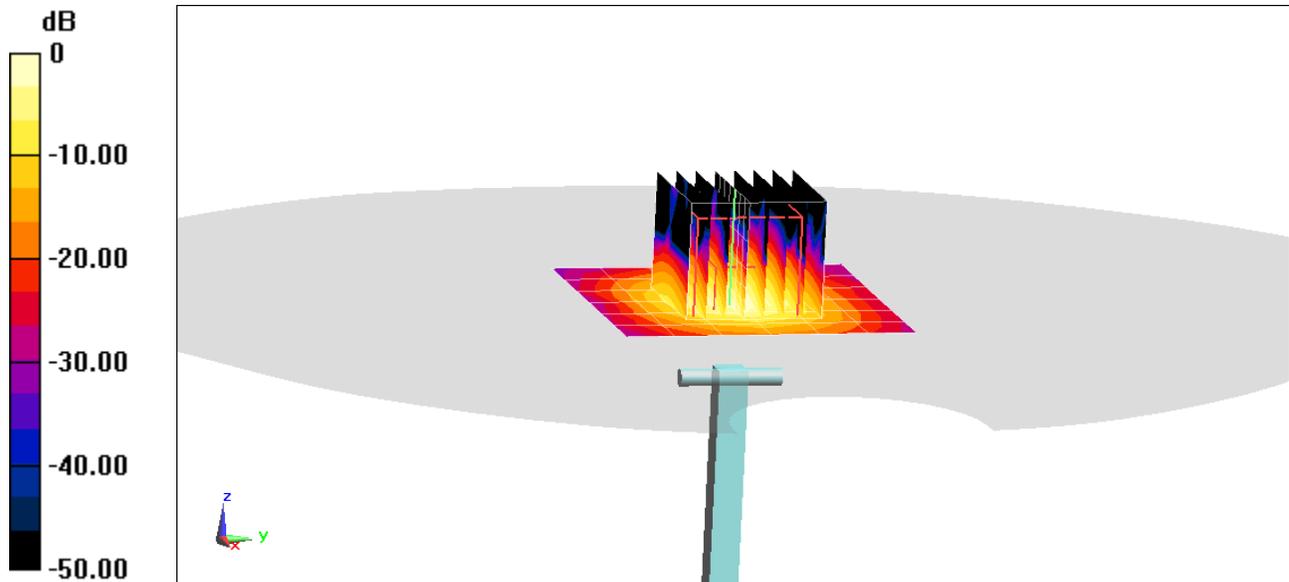

0 dB = 8.90 W/kg = 9.49 dBW/kg

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1054\_Mar17**

**CALIBRATION CERTIFICATE**

Object **D750V3 - SN:1054**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

*BNV*  
*03-27-2017*  
*BNV*  
*04-04-2018*

Calibration date: **March 07, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20K)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	04-Jan-17 (No. DAE4-601_Jan17)	Jan-18

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (In house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (In house check Oct-18)	In house check: Oct-17

Calibrated by: **Johannes Kurikka**      Name: Johannes Kurikka      Function: Laboratory Technician

Signature  
*Johannes Kurikka*  
*Katja Pokovic*

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Technical Manager

Issued: March 14, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.9 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.37 W/kg ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.60 W/kg ± 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.6 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>8.61 W/kg ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>5.68 W/kg ± 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.7 $\Omega$ - 0.7 j $\Omega$
Return Loss	- 26.8 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.7 $\Omega$ - 3.6 j $\Omega$
Return Loss	- 28.7 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

# DASY5 Validation Report for Head TSL

Date: 07.03.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1054**

Communication System: UID 0 - CW ; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 40.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.17, 10.17, 10.17); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 59.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.21 W/kg

**SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.4 W/kg**

Maximum value of SAR (measured) = 2.85 W/kg

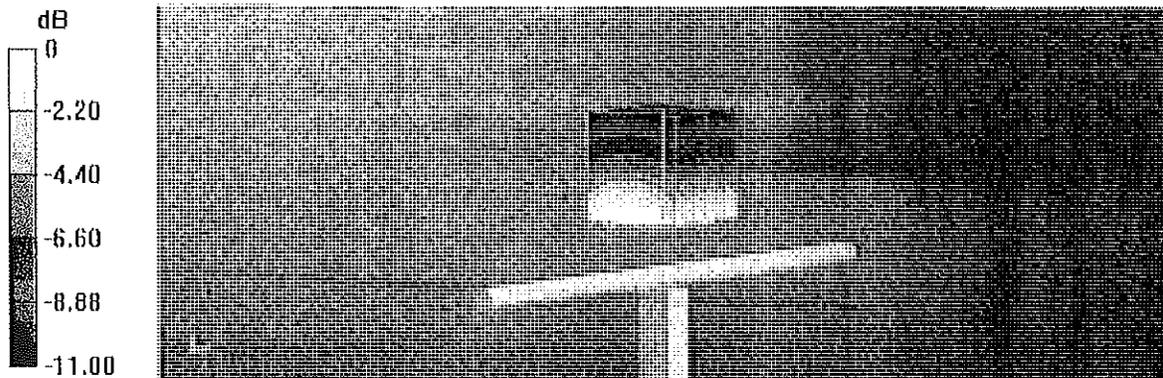


0 dB = 2.85 W/kg = 4.55 dBW/kg

# Impedance Measurement Plot for Head TSL

7 Mar 2017 12:25:14  
 CH1 S11 1 U FS 1: 54.732  $\Omega$  -732.42  $m\Omega$  289.73 pF 750.000 000 MHz

\*  
 Del  
 CA

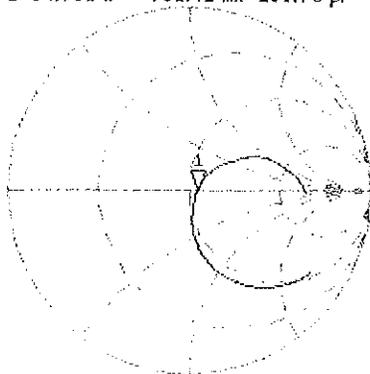

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -26.788 dB 750.000 000 MHz

CA

Avg  
 16

H1d

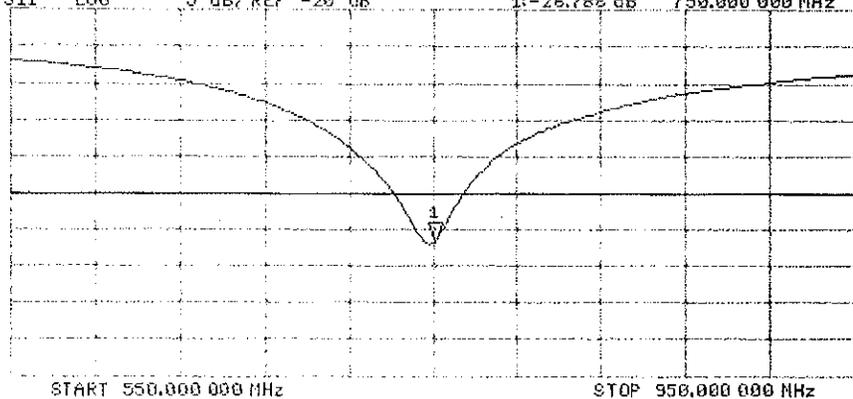

## DASY5 Validation Report for Body TSL

Date: 07.03.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT:** Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1054

Communication System: UID 0 - CW ; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 54.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.88 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.31 W/kg

**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.45 W/kg**

Maximum value of SAR (measured) = 2.94 W/kg

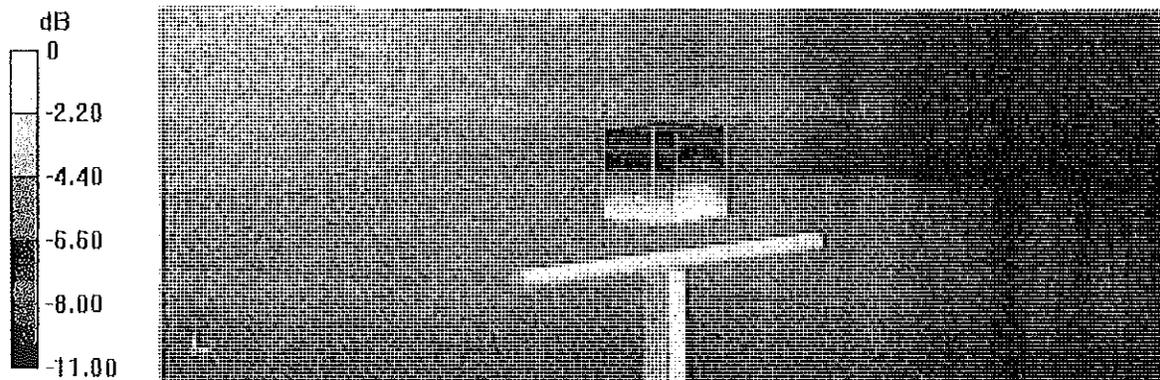

# Impedance Measurement Plot for Body TSL


7 Mar 2017 11:51:37  
S11 1 U FS 1150.666  $\Omega$  -3.6309  $\Omega$  58.445 pF 750.000 000 MHz

\*  
De1

Ca

Avg  
16

H1d

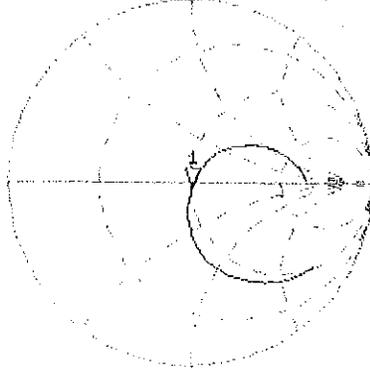


CH2 S11 LOG 5 dB/REF -20 dB 1:-28.716 dB 750.000 000 MHz

Ca

Avg  
16

H1d

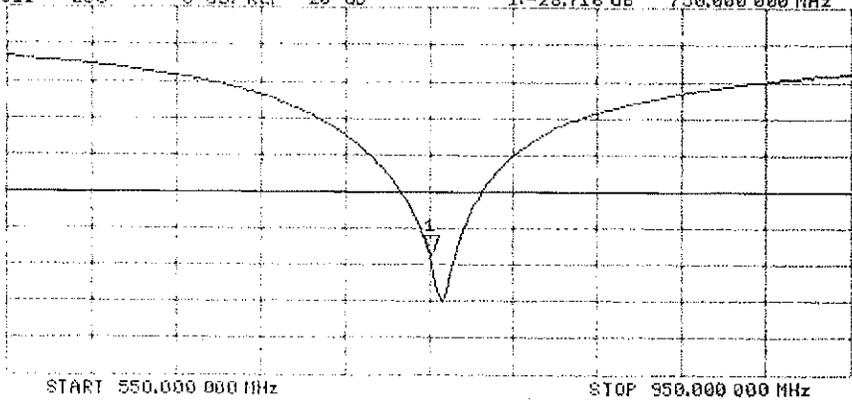

## Certification of Calibration

Object: D750V3 – SN:1054

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: March 07, 2018

Description: SAR Validation Dipole at 750 MHz.

**Calibration Equipment used:**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	8/3/2017	Annual	8/3/2018	MY40000670
Agilent	N5182A	MXG Vector Signal Generator	1/24/2018	Annual	1/24/2019	MY47420651
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	10/16/2017	Annual	10/16/2018	1126066
Anritsu	ML2495A	Power Meter	10/22/2017	Annual	10/22/2018	1328004
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	1/22/2018	Annual	1/22/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/13/2017	Annual	7/13/2018	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/21/2017	Annual	6/21/2018	1333
SPEAG	EX3DV4	SAR Probe	7/17/2017	Annual	7/17/2018	7410
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287

Measurement Uncertainty =  $\pm 23\%$  (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

# DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
3/7/2017	3/7/2018	1.033	1.67	1.70	1.55%	1.10	1.11	0.91%	54.7	53.4	1.3	-0.7	-2.5	1.8	-26.8	-28.0	-4.50%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
3/7/2017	3/7/2018	1.033	1.72	1.70	-1.28%	1.14	1.12	-1.41%	50.7	50.4	0.3	-3.6	-3.9	0.3	-28.7	-28.5	0.60%	PASS

# Impedance & Return-Loss Measurement Plot for Head TSL

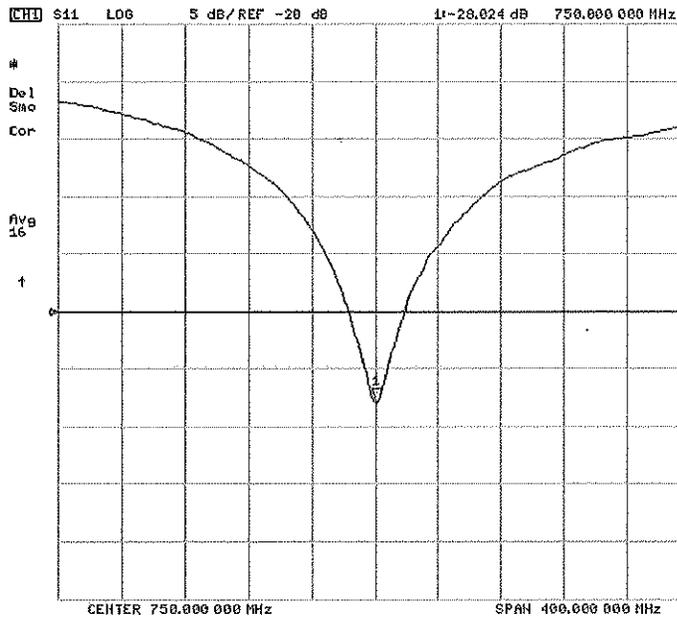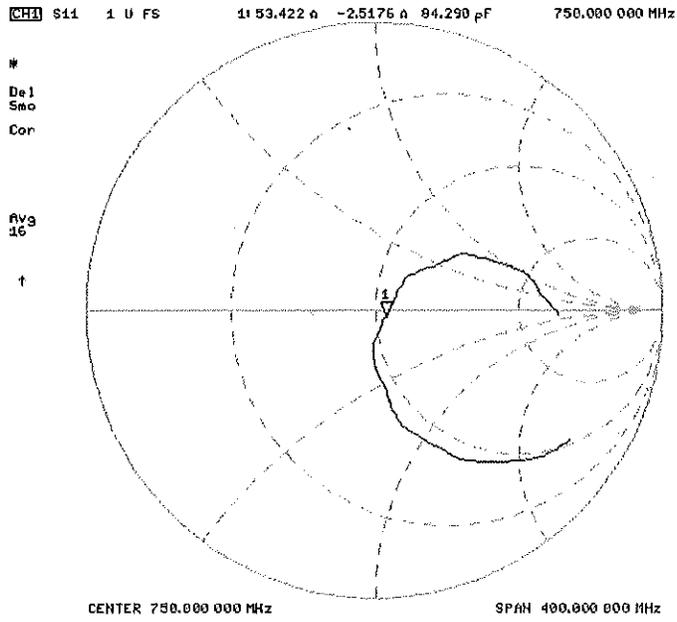

# Impedance & Return-Loss Measurement Plot for Body TSL

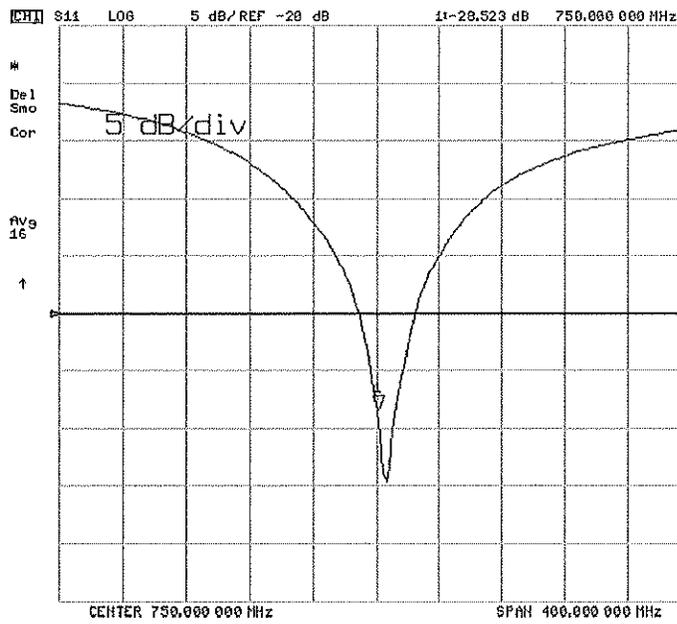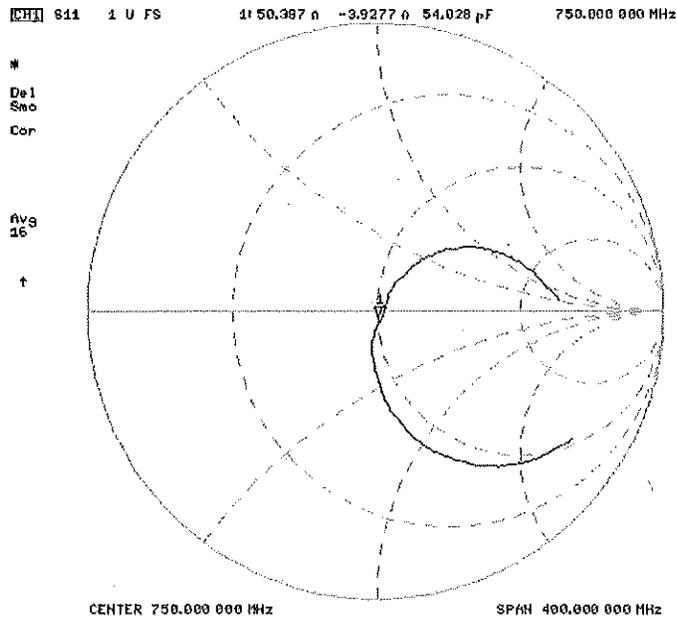



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d047\_Oct18**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d047**

Calibration procedure(s) **QA CAL-05.v10  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **October 19, 2018**

*BN ✓  
10-30-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Manu Seitz**      **Manu Seitz**      **Manu Seitz**  
Name      Function      Signature  
Laboratory Technician

Approved by: **Katja Pokovic**      **Katja Pokovic**  
Technical Manager

Issued: October 22, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.5	0.90 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.6 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>9.47 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>6.14 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	55.2	0.97 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	54.9 $\pm$ 6 %	0.98 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	2.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>9.71 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	1.60 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>6.36 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 $\Omega$ - 0.5 j $\Omega$
Return Loss	- 39.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.6 $\Omega$ - 4.1 j $\Omega$
Return Loss	- 24.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.387 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 16, 2006

## DASY5 Validation Report for Head TSL

Date: 19.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d047**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9) @ 835 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.84 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.69 W/kg

**SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 3.24 W/kg

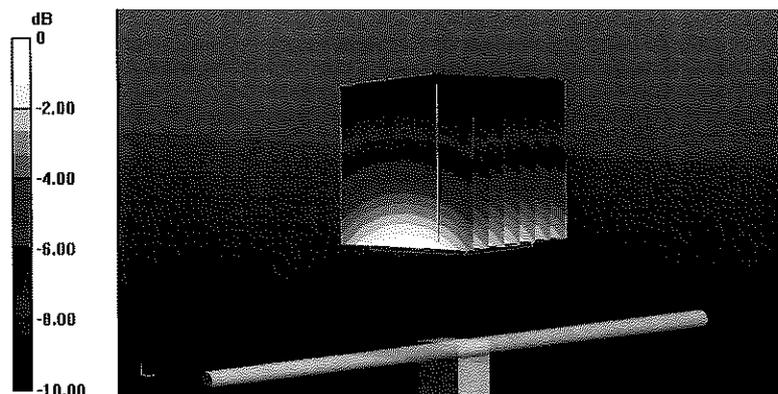

0 dB = 3.24 W/kg = 5.11 dBW/kg