



CERTIFICATION TEST REPORT

Report Number. : 4789247752-E8V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-G980F/DS, SM-G980F

FCC ID : A3LSMG980F

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+,
NFC and WPT

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
January 10, 2020

Prepared by:
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	01/07/20	Initial issue	Sungeun Lee
V2	01/10/20	Updated to address TCB's question	Sungeun Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	9
4.4. DECISION RULE	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	13
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	14
5.4. List of test reduction and modes covering other modes:	14
5.5. WORST-CASE CONFIGURATION AND MODE	15
5.6. DESCRIPTION OF TEST SETUP	16
6. TEST AND MEASUREMENT EQUIPMENT	18
7. SUMMARY TABLE	19
8. MEASUREMENT METHODS	20
9. REFERENCE MEASUREMENTS RESULTS	21
9.1. ON TIME AND DUTY CYCLE RESULTS	21
9.2. 26 dB BANDWIDTH	36
9.2.1. 802.11ax 5.2 GHz BAND	37
9.2.2. 802.11ax 5.3 GHz BAND	38
9.2.3. 802.11ax 5.5 GHz BAND	39
9.2.4. 802.11ax STRADDLE CHANNEL	39
9.2.5. TEST PLOT_802.11ax 5.2 GHz BAND	40
9.2.6. TEST PLOT_802.11ax 5.3 GHz BAND	52
9.2.7. TEST PLOT_802.11ax 5.5 GHz BAND	64
9.2.8. TEST PLOT_802.11ax STRADDLE CHANNEL	80
10. ANTENNA PORT TEST RESULTS	83

10.1.	6 dB BANDWIDTH	83
10.1.1.	802.11ax 5.8 GHz BAND	83
10.1.2.	TEST PLOT_802.11ax 5.8 GHz BAND	84
10.2.	OUTPUT POWER AND PPSD	87
10.2.1.	802.11ax 1Tx (SISO) MODE 5.2 GHz BAND	88
10.2.2.	802.11ax 1Tx (SISO) MODE 5.3 GHz BAND	92
10.2.3.	802.11ax 1Tx (SISO) MODE 5.5 GHz BAND	96
10.2.4.	802.11ax 1Tx (SISO) MODE STRADDLE CHANNEL	101
10.2.5.	802.11ax 1Tx (SISO) MODE 5.8 GHz BAND	103
10.2.6.	802.11ax 2Tx (MIMO) MODE 5.2 GHz BAND	107
10.2.7.	802.11ax 2Tx (MIMO) MODE 5.3 GHz BAND	111
10.2.8.	802.11ax 2Tx (MIMO) MODE 5.5 GHz BAND	115
10.2.9.	802.11ax 2Tx (MIMO) MODE STRADDLE CHANNEL	120
10.2.10.	802.11ax 2Tx (MIMO) MODE 5.8 GHz BAND	122
10.2.11.	TEST PLOT_802.11ax 1Tx (SISO) MODE 5.2 GHz BAND	126
10.2.12.	TEST PLOT_802.11ax 1Tx (SISO) MODE 5.3 GHz BAND	138
10.2.13.	TEST PLOT_802.11ax 1Tx (SISO) MODE 5.5 GHz BAND	150
10.2.14.	TEST PLOT_802.11ax 1Tx (SISO) MODE STRADDLE CHANNEL	166
10.2.15.	TEST PLOT_802.11ax 1Tx (SISO) MODE 5.8 GHz BAND	172
10.2.16.	TEST PLOT_802.11ax 2Tx (MIMO) MODE 5.2 GHz BAND	184
10.2.17.	TEST PLOT_802.11ax 2Tx (MIMO) MODE 5.3 GHz BAND	196
10.2.18.	TEST PLOT_802.11ax 2Tx (MIMO) MODE 5.5 GHz BAND	208
10.2.19.	TEST PLOT_802.11ax 2Tx (MIMO) MODE STRADDLE CHANNEL	224
10.2.20.	TEST PLOT_802.11ax 2Tx (MIMO) MODE 5.8 GHz BAND	230
11.	TRANSMITTER ABOVE 1 GHz.....	242
11.1.	RADIATED TEST_1Tx (SISO)	245
11.1.1.	RESTRICTED BAND-EDGE_5.2GHz BAND	245
11.1.2.	HARMONICS AND SPURIOUS EMISSIONS_5.2GHz BAND	257
11.1.3.	RESTRICTED BAND-EDGE_5.3GHz BAND	305
11.1.4.	HARMONICS AND SPURIOUS EMISSIONS_5.3GHz BAND	317
11.1.5.	RESTRICTED BAND-EDGE_5.5GHz BAND	365
11.1.6.	HARMONICS AND SPURIOUS EMISSIONS_5.5GHz BAND	389
11.1.7.	RESTRICTED BAND-EDGE_5.8GHz BAND	453
11.1.8.	HARMONICS AND SPURIOUS EMISSIONS_5.8GHz BAND	477
11.2.	RADIATED TEST_2Tx (MIMO)	525
11.2.1.	RESTRICTED BAND-EDGE_5.2GHz BAND	525
11.2.2.	HARMONICS AND SPURIOUS EMISSIONS_5.2GHz BAND	531
11.2.3.	RESTRICTED BAND-EDGE_5.3GHz BAND	555
11.2.4.	HARMONICS AND SPURIOUS EMISSIONS_5.3GHz BAND	561
11.2.5.	RESTRICTED BAND-EDGE_5.5GHz BAND	585
11.2.6.	HARMONICS AND SPURIOUS EMISSIONS_5.5GHz BAND	597
11.2.7.	RESTRICTED BAND-EDGE_5.8GHz BAND	629
11.2.8.	HARMONICS AND SPURIOUS EMISSIONS_5.8GHz BAND	641
11.3.	Spurious Emissions for Simultaneous Transmission	665
11.3.1.	Worst test case condition	666
11.3.2.	Test Results.....	668
12.	WORST-CASE BELOW 1 GHz	682
13.	AC POWER LINE CONDUCTED EMISSIONS.....	682

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT

MODEL NUMBER: SM-G980F/DS, SM-G980F

SERIAL NUMBER: 38b95f7950197ece, 39989048ab1f7ece (CONDUCTED, Original); R3CMA0D7LSP, R3CMA0D7LWM, R3CMA0D7LQT (RADIATED, Original); R38MB0AHJRL, R38MB2AHJNE (RADIATED, Spot check)

DATE TESTED: OCT 31, 2019 – NOV 29, 2019 (Original);
NOV 05, 2019 – NOV 29, 2019 (Spot check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Sungeun Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMG981B NII WLAN(FCC CFR 47 Part 15E). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMG980F shares the same enclosure and circuit board as FCC ID: A3LSMG981B. The WLAN antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG981B remains representative of FCC ID: A3LSMG980F. The test data of FCC ID: A3LSMG981B being submitted for this application to cover WLAN features.

1.3. SPOT CHECK VERIFICATION DATA (Worst case of the radiated spurious and band edge emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-G981B/DS	SM-G980F/DS		
					FCC ID : A3LSMG981B	FCC ID : A3LSMG980F		
UNII WLAN 802.11 ax (5 GHz)	Band Edge	802.11ax(HE40)_5190_SU_ANT2	5190 MHz	54.0 dBuV/m	49.82 dBuV/m	47.93 dBuV/m	-1.89 dB	-
	RSE	802.11ax(HE20)_5180_RU4_ANT1	5180 MHz	68.2 dBuV/m	62.91 dBuV/m	57.17 dBuV/m	-5.74 dB	2nd Harmonic Noise floor
	Band Edge	802.11ax(HE40)_5190_SU_ALL	5190 MHz	54.0 dBuV/m	49.82 dBuV/m	48.94 dBuV/m	-0.88 dB	-
	RSE	802.11ax(HE20)_5180_SU_ALL	5180 MHz	68.2 dBuV/m	62.14 dBuV/m	62.39 dBuV/m	0.25 dB	2nd Harmonic
	Band Edge	802.11ax(HE40)_5310_SU_ANT2	5310 MHz	54.0 dBuV/m	48.21 dBuV/m	49.14 dBuV/m	0.93 dB	-
	RSE	802.11ax(HE20)_5270_RU0_ANT1	5270 MHz	68.2 dBuV/m	62.33 dBuV/m	58.29 dBuV/m	-4.04 dB	2nd Harmonic Noise floor
	Band Edge	802.11ax(HE20)_5320_SU_ALL	5320 MHz	54.0 dBuV/m	47.57 dBm	50.33 dBm	2.76 dB	-
	RSE	802.11ax(HE20)_5300_SU_ALL	5300 MHz	54.0 dBuV/m	47.40 dBm	41.96 dBm	-5.44 dB	2nd Harmonic Noise floor
	Band Edge	802.11ax(HE20)_5700_SU_ANT1	5700 MHz	68.2 dBuV/m	64.97 dBm	57.55 dBm	-7.42 dB	-
	RSE	802.11ax(HE20)_5700_RU4_ANT1	5700 MHz	54.0 dBuV/m	46.19 dBm	42.76 dBm	-3.43 dB	2nd Harmonic
	Band Edge	802.11ax(HE40)_5510_SU_ALL	5510 MHz	68.2 dBuV/m	66.02 dBm	57.58 dBm	-8.44 dB	-
	RSE	802.11ax(HE40)_5510_RU9_ALL	5510 MHz	68.2 dBuV/m	56.72 dBm	56.97 dBm	0.25 dB	3rd Harmonic Noise floor
	Band Edge	802.11ax(HE80)_5775_SU_ANT2	5775 MHz	-27.0 dBm	-34.13 dBm	-34.82 dBm	-0.69 dB	-
	RSE	802.11ax(HE20)_5785_RU4_ANT1	4785 MHz	54.0 dBuV/m	48.89 dBm	47.27 dBm	-1.62 dB	2nd Harmonic
	Band Edge	802.11ax(HE40)_5795_SU_ALL	5795 MHz	-27.0 dBm	33.48 dBm	34.71 dBm	1.23 dB	-
	RSE	802.11ax(HE20)_5745_SU_ALL	5745 MHz	54.0 dBuV/m	44.69 dBuV/m	46.01 dBuV/m	1.32 dB	2nd Harmonic

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
PCE	A3LSMG981B	Original Grant	4789230288-E2	Test Report	4789247752-E2	All
DTS	A3LSMG981B	Original Grant	4789230288-E3 (802.11b/g/n)	Test Report	4789247752-E3 (802.11b/g/n)	All
			4789230288-E4 (802.11ax)	Test Report	4789247752-E4 (802.11ax)	All
			4789230288-E5 Bluetooth LE	Test Report	4789247752-E5 Bluetooth LE	All
DSS	A3LSMG981B	Original Grant	4789230288-E6 (Bluetooth)	Test Report	4789247752-E6 (Bluetooth)	All
NII	A3LSMG981B	Original Grant	4789230288-E7 (802.11a/n/ac)	Test Report	4789247752-E7 (802.11a/n/ac)	All
			4789230288-E8 (802.11ax)	Test Report	4789247752-E8 (802.11ax)	All
DXX	A3LSMG981B	Original Grant	4789230288-E9 (ANT+)	Test Report	4789247752-E9 (ANT+)	All
			4789230288-E10 (NFC)	Test Report	4789247752-E10 (NFC)	All
DCD	A3LSMG981B	Original Grant	4789230288-E11 (WPT)	Test Report	4789247752-E11 (WPT)	All

For this application the data reuse is summarized below for each equipment class:

Equipment Class	Reference FCC ID (Parent)	Application Type	Test Item	Data Re-used
PCE	A3LSMG981B	Original Grant	WWAN	All except SAR (full test), HAC (full test)
DTS	A3LSMG981B	Original Grant	BLE	All
			WLAN	All except SAR (full test), HAC (full test)
			WLAN 802.11ax	All except HAC (full test)
DSS	A3LSMG981B	Original Grant	BT	All except SAR (full test)
NII	A3LSMG981B	Original Grant	WLAN	All except SAR (full test), HAC (full test)
			WLAN 802.11ax	All except HAC (full test)
DXX	A3LSMG981B	Original Grant	ANT+	All
			NFC	All
DCD	A3LSMG981B	Original Grant	WPT	All except RF exposure

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v05r02.
4. ANSI C63.10-2013.
5. KDB 662911 D01 v02r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Chamber 1
<input checked="" type="checkbox"/> Chamber 2
<input checked="" type="checkbox"/> Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/wp-content/uploads/2017/05/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.35 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.49 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.82 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT. This test report addresses the 802.11ax WLAN (UNII) operational mode.

This report covers the Samsung models SM-G980F/DS and SM-G980F. These models are identical in hardware except SM-G980F has single SIM tray. With some pre-scan, model SM-G980F/DS was set for spot check test.

WiFi Operating mode

Frequency range	Mode	Antenna 1	Antenna 2
5GHz (5180 MHz ~ 5825 MHz)	802.11ax(HE20) SISO	TX/RX	TX/RX
	802.11ax(HE20) MIMO	TX/RX	TX/RX
	802.11ax(HE40) SISO	TX/RX	TX/RX
	802.11ax(HE40) MIMO	TX/RX	TX/RX
	802.11ax(HE80) SISO	TX/RX	TX/RX
	802.11ax(HE80) MIMO	TX/RX	TX/RX

Simultaneous TX Condition

Simultaneous Tx Condition - RSDB

Mode	# of TX	5GHz		2.4GHz		Test Case
		ANT1	ANT2	ANT1	ANT2	
2.4GHz + 5GHz RSDB Only	2	A	-	-	B	V
	2	-	A	B	-	V
	2	A	-	B	-	-
	2	-	A	-	B	-
2.4GHz + 5GHz RSDB & MIMO	3	A	A	B	-	-
	3	A	A	-	B	-
	3	A	-	B	B	-
	3	-	A	B	B	-
2.4GHz + 5GHz RSDB MIMO	4	A	A	B	B	V


Note. A = 13 dBm / B = 15 dBm

Simultaneous Tx Condition - Bluetooth with 5GHz WLAN (Not RSDB)


Mode	# of TX	5GHz		2.4GHz Bluetooth	Test Case
		ANT1	ANT2	ANT1	
2.4GHz Bluetooth + 5GHz WLAN (Not RSDB)	2	A	-	C	-
	2	-	A	C	-
	3	A	A	C	V

Note1. A = 13 dBm, C = 16.5 dBm


802.11ax RU allocations

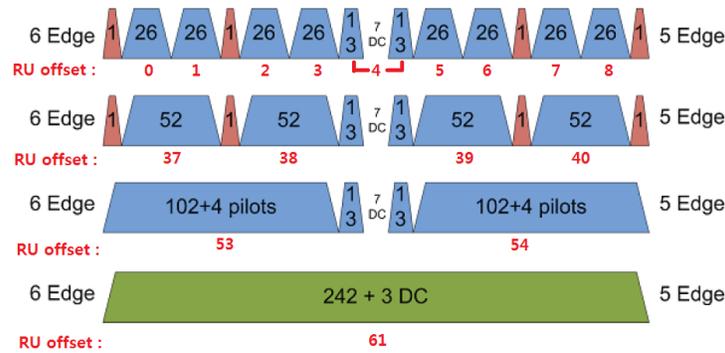

- HE 20 Mode -

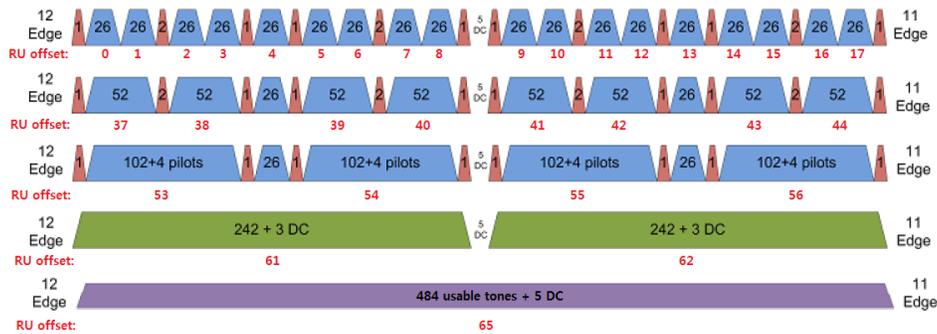

- HE 40 Mode -

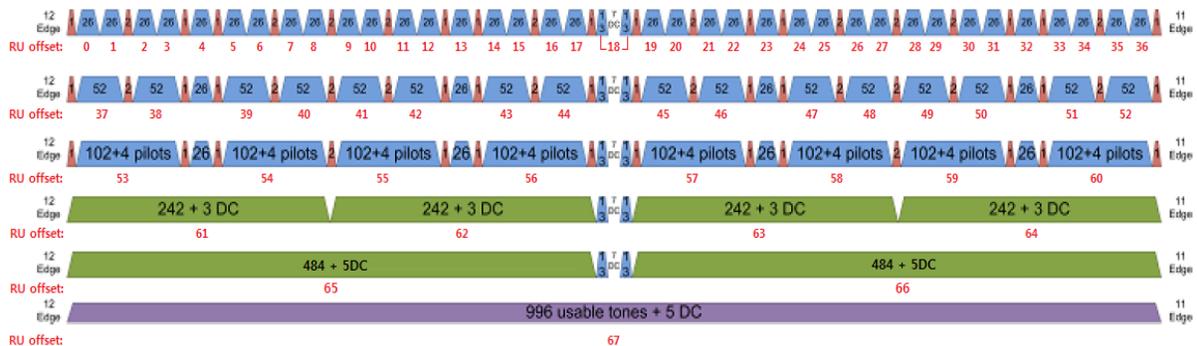

- HE 80 Mode -

Test RU offset for tones in each modes

Mode	Tones	RU offset	
HE20	26T	0	
		4	
		8	
	52T	37	
		38	
		40	
	106T	53	
		54	
	242T / SU ^{Note 1}		61 / -
	HE40	26T	0
9			
17			
52T		37	
		41	
		44	
106T		53	
		54	
		56	
242T		61	
	62		
484T / SU ^{Note 1}		63 / -	
HE80	26T	0	
		18	
		36	
	52T	37	
		45	
		52	
	106T	53	
		57	
		60	
	242T	61	
62			
64			
484T	65		
	66		
996T / SU ^{Note 1}		67 / -	

Note: Full RU(Resource Unit) 242T(HE20) / 484T(HE40) / 996T(HE80) mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the SU mode with highest output power in SISO and the SU mode with highest output power in MIMO.

Band portion of RU allocation about straddle channels

Mode	Channel	Tones	RU offset	Portion
HE20	Straddle 5720 MHz	26T	6	UNII 2C & UNII 3
		242T / SU	61 / -	
HE40	Straddle 5710 MHz	26T	16	UNII 2C & UNII 3
		484T / SU	65 / -	
HE80	Straddle 5690 MHz	26T	35	UNII 2C & UNII 3
		996T / SU	67 / -	

Note: In case of RU straddle channel, test was performed overlapping RU position.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		Antenna1	Antenna2	Antenna1	Antenna2
5180 - 5240	802.11ax HE20 SISO	15.71	16.31	37.24	42.76
	802.11ax HE20 MIMO	19.39		86.90	
5190 - 5230	802.11ax HE40 SISO	14.01	14.51	25.18	28.25
	802.11ax HE40 MIMO	16.74		47.21	
5210	802.11ax HE80 SISO	13.03	13.54	20.09	22.59
	802.11ax HE80 MIMO	15.74		37.50	
5260 - 5320	802.11ax HE20 SISO	15.85	16.46	38.46	44.26
	802.11ax HE20 MIMO	19.45		88.10	
5270 - 5310	802.11ax HE40 SISO	14.07	14.52	25.53	28.31
	802.11ax HE40 MIMO	16.72		46.99	
5290	802.11ax HE80 SISO	13.08	13.59	20.32	22.86
	802.11ax HE80 MIMO	15.78		37.84	
5500 - 5720	802.11ax HE20 SISO	13.71	13.82	23.50	24.10
	802.11ax HE20 MIMO	15.92		39.08	
5510 - 5710	802.11ax HE40 SISO	12.68	12.77	18.54	18.92
	802.11ax HE40 MIMO	15.23		33.34	
5530 - 5690	802.11ax HE80 SISO	12.45	12.94	17.58	19.68
	802.11ax HE80 MIMO	14.91		30.97	
5745 - 5825	802.11ax HE20 SISO	16.58	15.97	45.50	39.54
	802.11ax HE20 MIMO	19.27		84.53	
5755 - 5795	802.11ax HE40 SISO	14.90	14.26	30.90	26.67
	802.11ax HE40 MIMO	17.60		57.54	
5775	802.11ax HE80 SISO	13.78	12.90	23.88	19.50
	802.11ax HE80 MIMO	16.44		44.06	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain [dBi]
UNII 1 5150 - 5250	-8.80	-8.10	-5.43
UNII 2A 5250 - 5350	-7.10	-8.10	-4.58
UNII 2C 5470 - 5725	-5.80	-6.20	-2.99
UNII 3 5725 - 5850	-7.70	-8.20	-4.94

“Sub #3-2 WiFi #1” and “Sub #4 WiFi #2” as indicated in antenna specification are written as ANT1 and ANT2 in this report.

5.4. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

Authorized Frequency Band			
Mode	Antenna Stream	Mode	Covered by
802.11ax HE 20	SISO	802.11ax HE20 RU(242T) 1TX	802.11ax HE20 SU 1TX
	MIMO	802.11ax HE20 RU(242T) 2TX	802.11ax HE20 SU 2TX
802.11ax HE 40	SISO	802.11ax HE40 RU(484T) 1TX	802.11ax HE40 SU 1TX
	MIMO	802.11ax HE40 RU(484T) 2TX	802.11ax HE40 SU 2TX
802.11ax HE 80	SISO	802.11ax HE80 RU(996T) 1TX	802.11ax HE80 SU 1TX
	MIMO	802.11ax HE80 RU(996T) 2TX	802.11ax HE80 SU 2TX

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1 GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1 GHz was performed with the EUT set to transmit low/mid/high channels.

For SISO (ANT1), the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

For SISO (ANT2), the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

For MIMO, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11ax HE20 mode: MCS0 1Tx
802.11ax HE20 mode: MCS0 2Tx
802.11ax HE40 mode: MCS0 1Tx
802.11ax HE40 mode: MCS0 2Tx
802.11ax HE80 mode: MCS0 1Tx
802.11ax HE80 mode: MCS0 2Tx

Worst-case selection criteria for test items :

- For the radiated band-edge test, it was tested at SU mode for band-edge.
- For the spurious emissions, it was tested at the bandwidth/RU allocation with actual highest power and bandwidth/RU allocation with actual highest PSD for each bandwidth.
- For the 6dB Bandwidth, it was tested at the RU allocation with lowest tones number for each bandwidth.

Note : All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37M5WSB411SE3	N/A
Data Cable	SAMSUNG	EP-DG977	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

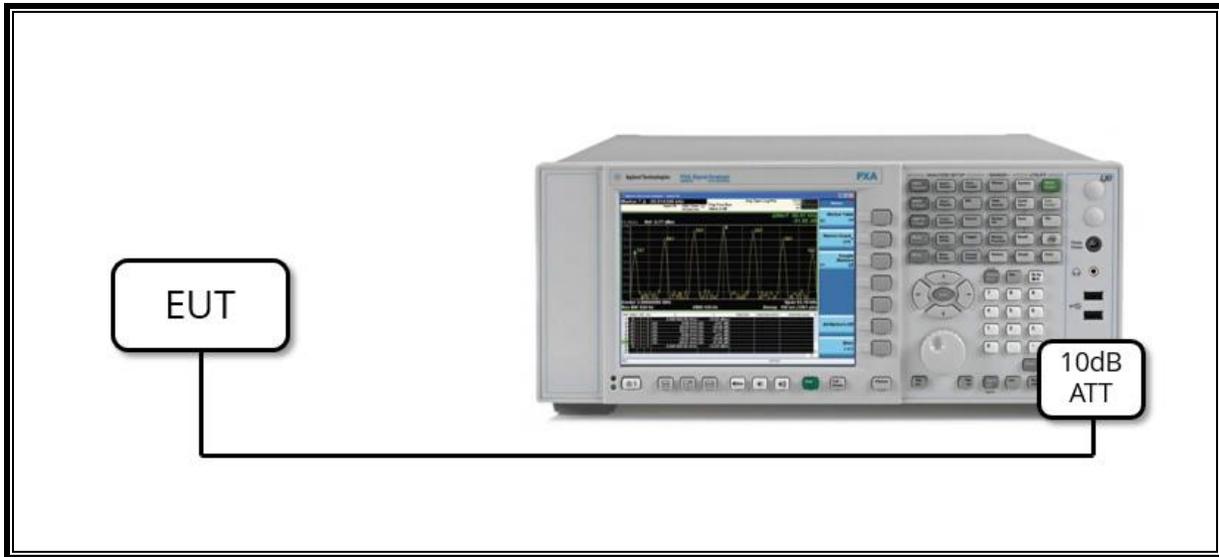

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

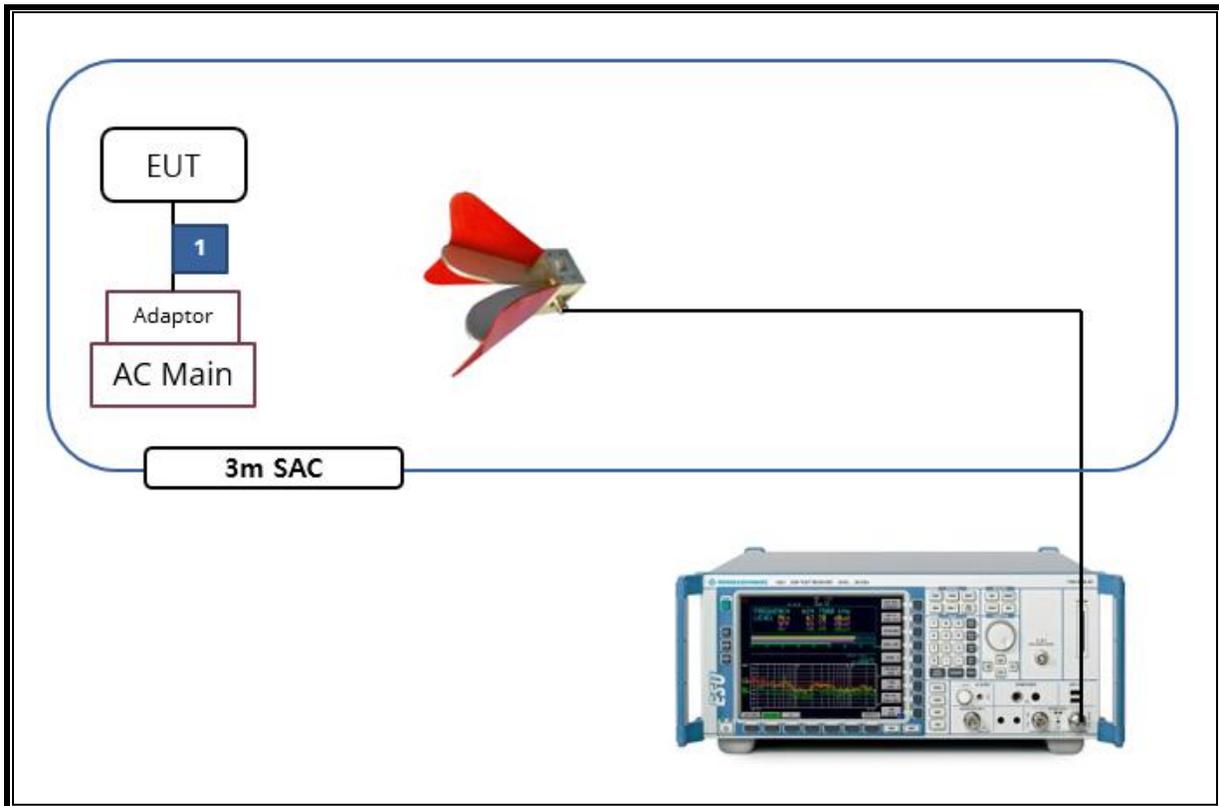

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	New Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-08-20
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-05-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-20
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-20
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-09-20
Attenuator	PASTERNAK	PE7087-10	A001	08-08-20
Attenuator	PASTERNAK	PE7087-10	A008	08-08-20
Attenuator	PASTERNAK	PE7004-10	2	08-06-20
Attenuator	PASTERNAK	PE7087-10	A009	08-08-20
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-20
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-20
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-05-20
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-05-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-20
LISN	R&S	ENV-216	101837	08-09-20
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
Antenna, Loop, 9kHz-30MHz				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407 (a)	Emission Bandwidth (26dB Bandwidth)	N/A	Condcuted	N/A
15.407(e)	6dB Band width (5.8Ghz)	500 kHz		PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(26dB BW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500 kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Refer to the UNII 802.11a_n_ac DFS WLAN Test report (No.:4789230288-E7)
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	Refer to the UNII 802.11a_n_ac DFS WLAN Test report (No.:4789230288-E7)

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section II.B.

6dB Emission BW : KDB 789033 D02 v02r01, Section II.C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section II.C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section II.D.

Conducted Output Power : KDB 789033 D02 v02r01, Section II.E.3.b(Method PM-G)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):
KDB 789033 D02 v02r01, Section II.E.2.b(Method SA-1)

Power Spectral Density : KDB 789033 D02 v02r01, Section II.F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ANT	Tone	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor [dB]
802.11ax HE20	Single	26T	4.901	4.931	0.99	99.39	0.00
		52T	5.216	5.315	0.98	98.14	0.00
		106T	2.490	2.589	0.96	96.18	0.17
		242T	1.121	1.221	0.92	91.81	0.37
		SU	1.044	1.143	0.91	91.34	0.39
	ALL	26T	5.223	5.323	0.98	98.12	0.00
		52T	2.649	2.749	0.96	96.36	0.16
		106T	1.284	1.384	0.93	92.77	0.33
		242T	0.601	0.701	0.86	85.77	0.67
		SU	0.558	0.657	0.85	84.94	0.71
802.11ax HE40	Single	26T	4.900	4.932	0.99	99.35	0.00
		52T	5.214	5.314	0.98	98.12	0.00
		106T	2.489	2.589	0.96	96.14	0.17
		242T	1.122	1.222	0.92	91.82	0.37
		484T	0.593	0.692	0.86	85.64	0.67
	SU	0.551	0.649	0.85	84.77	0.72	
	ALL	26T	5.223	5.323	0.98	98.12	0.00
		52T	2.650	2.750	0.96	96.36	0.16
		106T	1.284	1.384	0.93	92.77	0.33
		242T	0.601	0.701	0.86	85.72	0.67
484T		0.338	0.437	0.77	77.18	1.12	
SU	0.313	0.412	0.76	75.96	1.19		
802.11ax HE80	Single	26T	4.900	4.934	0.99	99.31	0.00
		52T	5.215	5.317	0.98	98.08	0.00
		106T	2.489	2.590	0.96	96.10	0.17
		242T	1.122	1.222	0.92	91.82	0.37
		484T	0.593	0.693	0.86	85.59	0.68
	996T	0.319	0.420	0.76	76.05	1.19	
	SU	0.296	0.395	0.75	74.94	1.25	
	ALL	26T	5.222	5.323	0.98	98.10	0.00
		52T	2.649	2.750	0.96	96.33	0.16
		106T	1.284	1.384	0.93	92.77	0.33
242T		0.601	0.701	0.86	85.72	0.67	
484T		0.338	0.438	0.77	77.07	1.13	
996T	0.202	0.302	0.67	66.82	1.75		
SU	0.185	0.284	0.65	65.00	1.87		


LIMITS


None; for reporting purposes only.



PROCEDURE


KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

DUTY CYCLE PLOTS

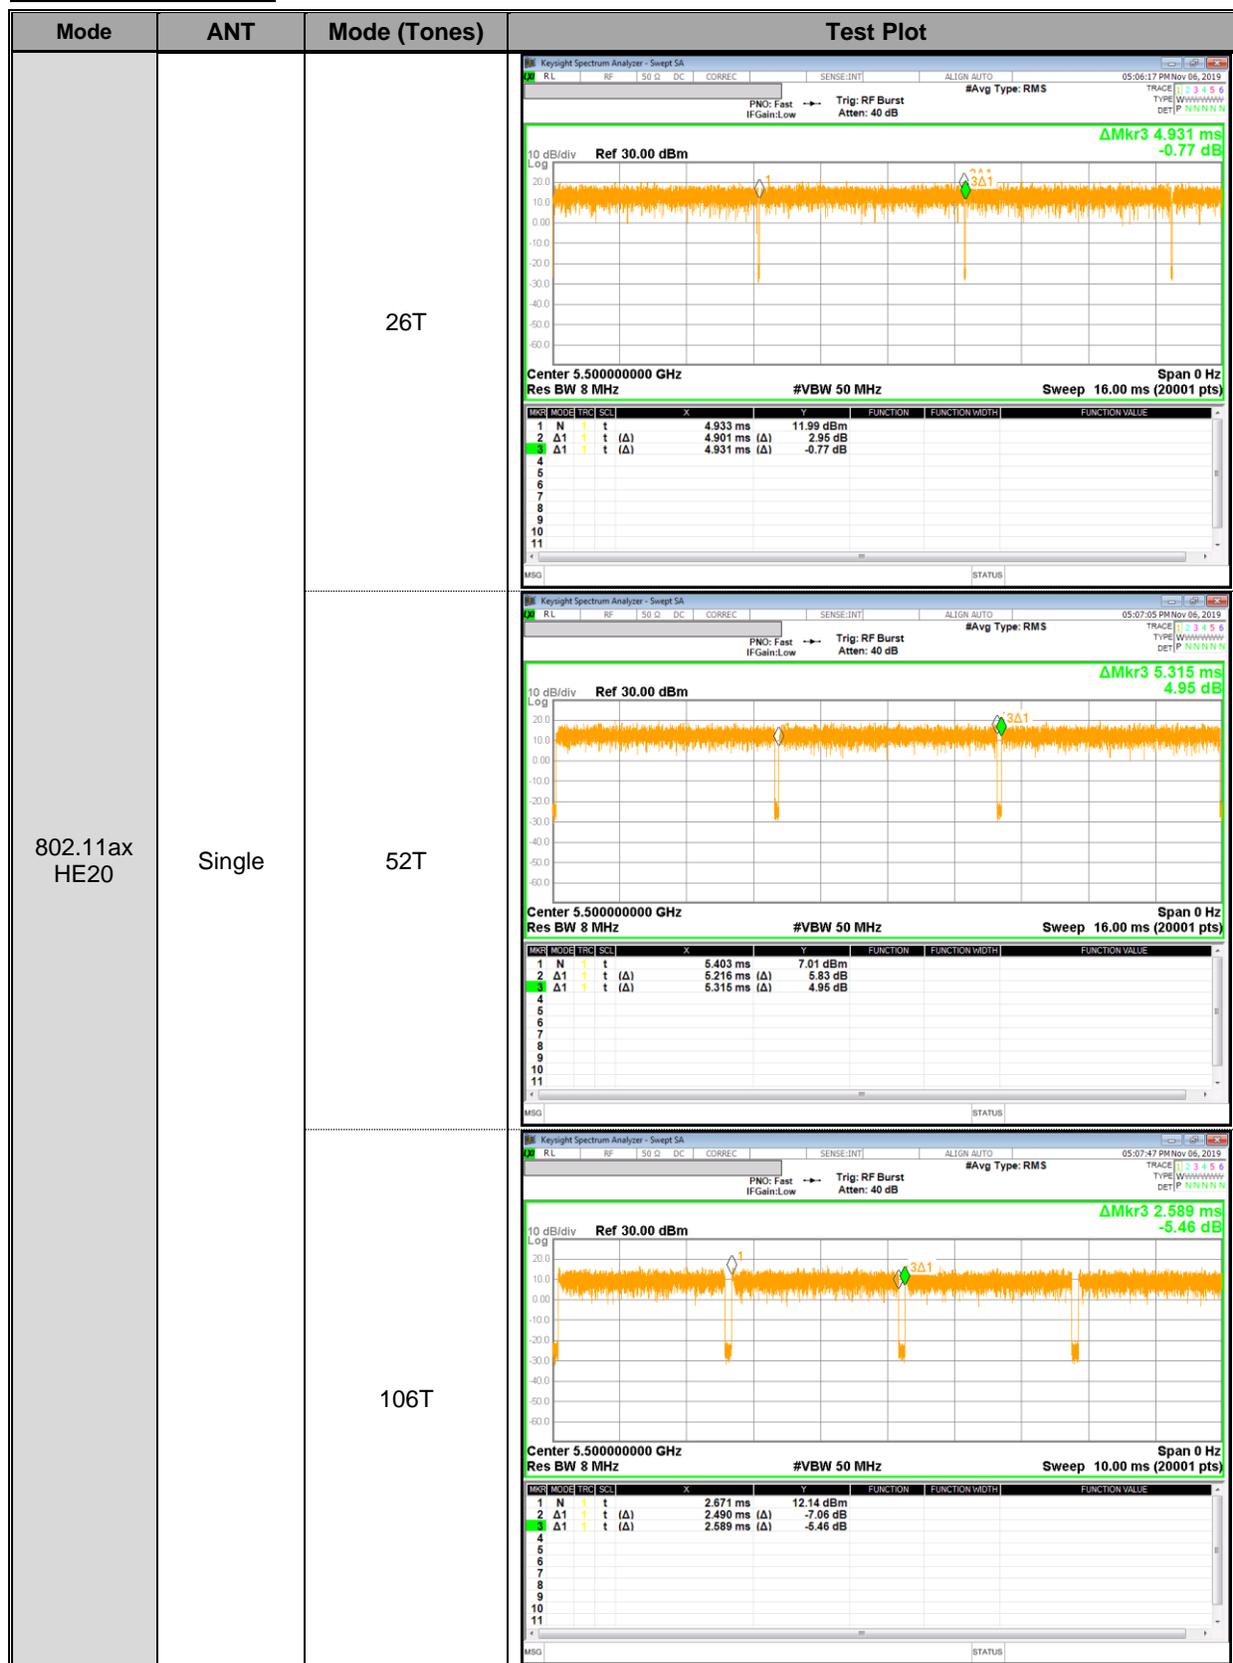

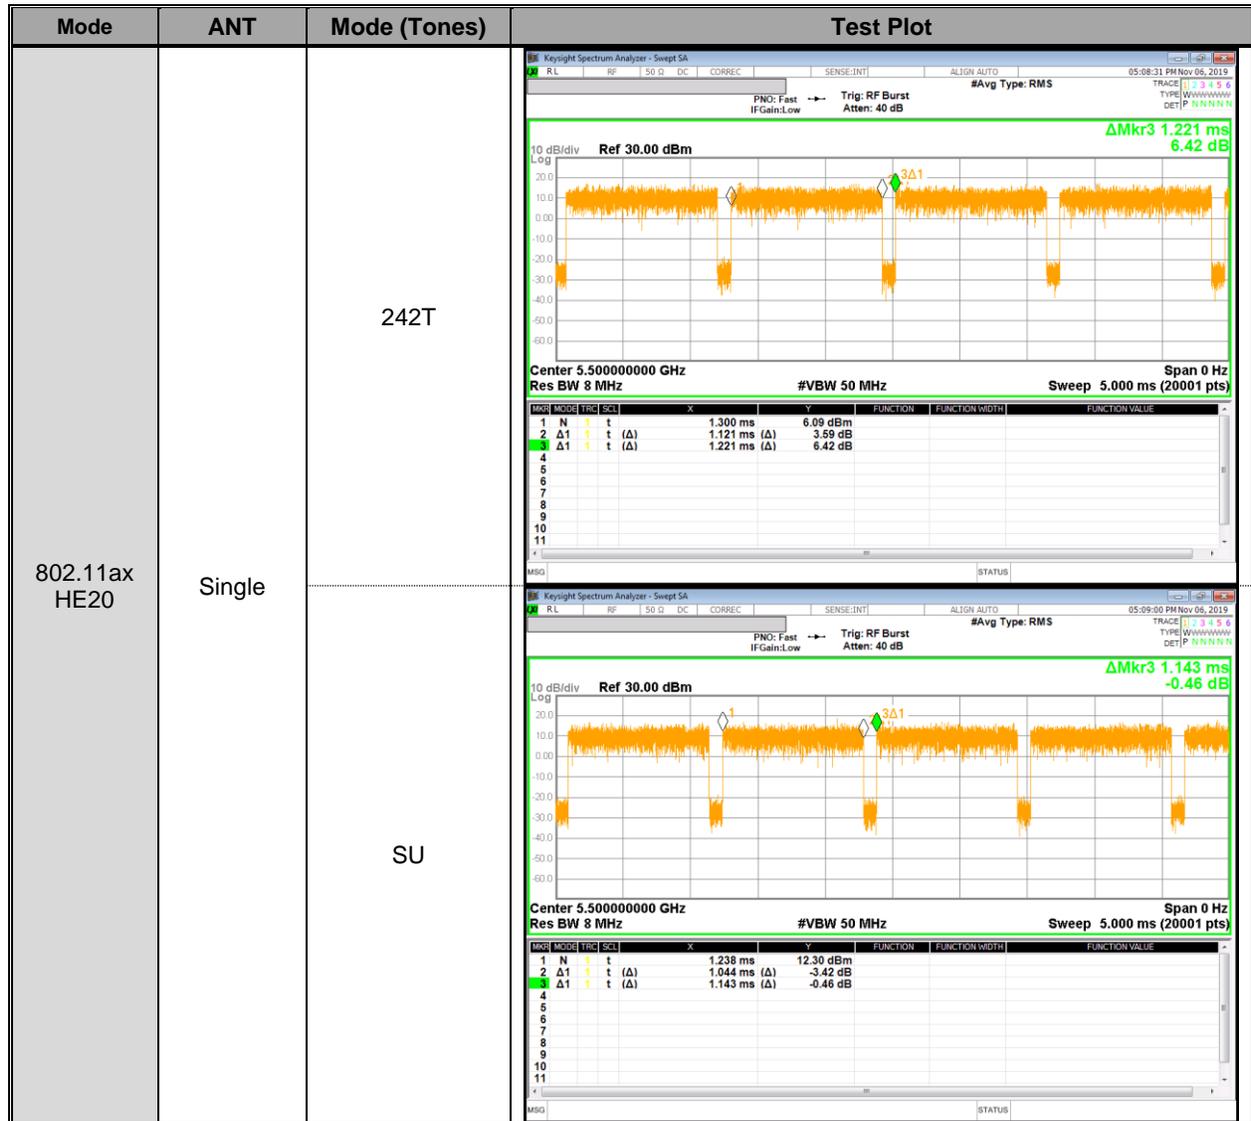

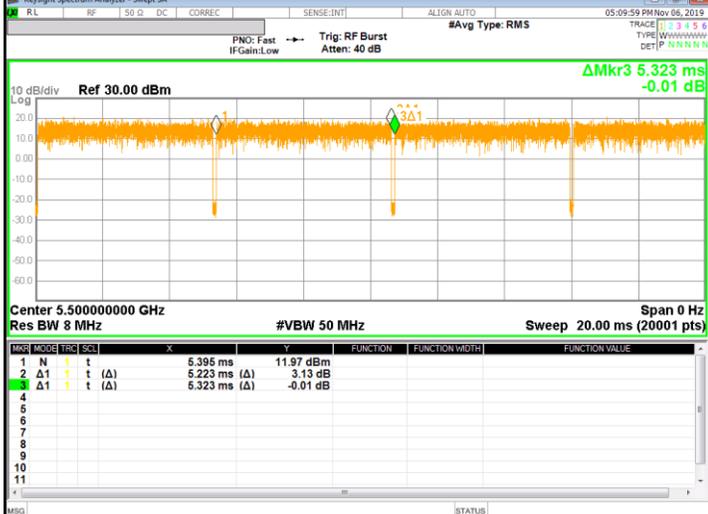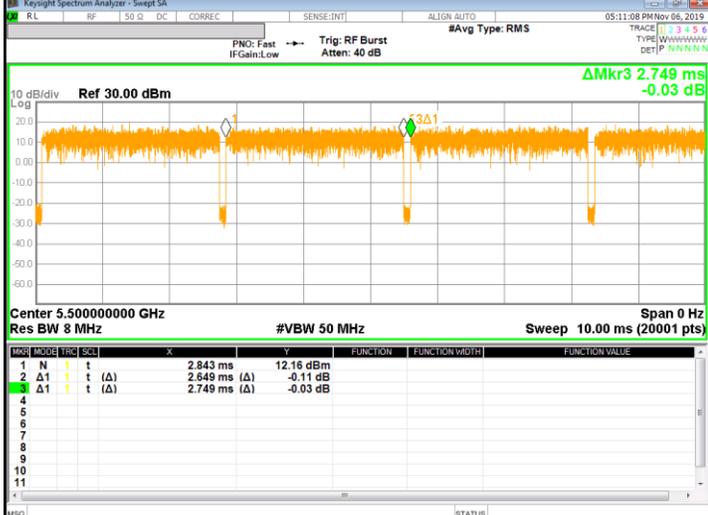Mode	ANT	Mode (Tones)	Test Plot																																
		26T	 <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Center 5.500000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 20.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>5.395 ms</td> <td>11.97 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>5.223 ms (Δ)</td> <td>3.13 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>5.323 ms (Δ)</td> <td>-0.01 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	5.395 ms	11.97 dBm				2	Δ1	t (Δ)	5.223 ms (Δ)	3.13 dB				3	Δ1	t (Δ)	5.323 ms (Δ)	-0.01 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	5.395 ms	11.97 dBm																															
2	Δ1	t (Δ)	5.223 ms (Δ)	3.13 dB																															
3	Δ1	t (Δ)	5.323 ms (Δ)	-0.01 dB																															
802.11ax HE20	ALL	52T	 <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Center 5.500000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 10.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>2.843 ms</td> <td>12.16 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>2.649 ms (Δ)</td> <td>-0.11 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>2.749 ms (Δ)</td> <td>-0.03 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	2.843 ms	12.16 dBm				2	Δ1	t (Δ)	2.649 ms (Δ)	-0.11 dB				3	Δ1	t (Δ)	2.749 ms (Δ)	-0.03 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	2.843 ms	12.16 dBm																															
2	Δ1	t (Δ)	2.649 ms (Δ)	-0.11 dB																															
3	Δ1	t (Δ)	2.749 ms (Δ)	-0.03 dB																															
		106T	 <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Center 5.500000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 5.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>1.471 ms</td> <td>6.72 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>1.284 ms (Δ)</td> <td>-0.24 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>1.384 ms (Δ)</td> <td>5.42 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	1.471 ms	6.72 dBm				2	Δ1	t (Δ)	1.284 ms (Δ)	-0.24 dB				3	Δ1	t (Δ)	1.384 ms (Δ)	5.42 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	1.471 ms	6.72 dBm																															
2	Δ1	t (Δ)	1.284 ms (Δ)	-0.24 dB																															
3	Δ1	t (Δ)	1.384 ms (Δ)	5.42 dB																															

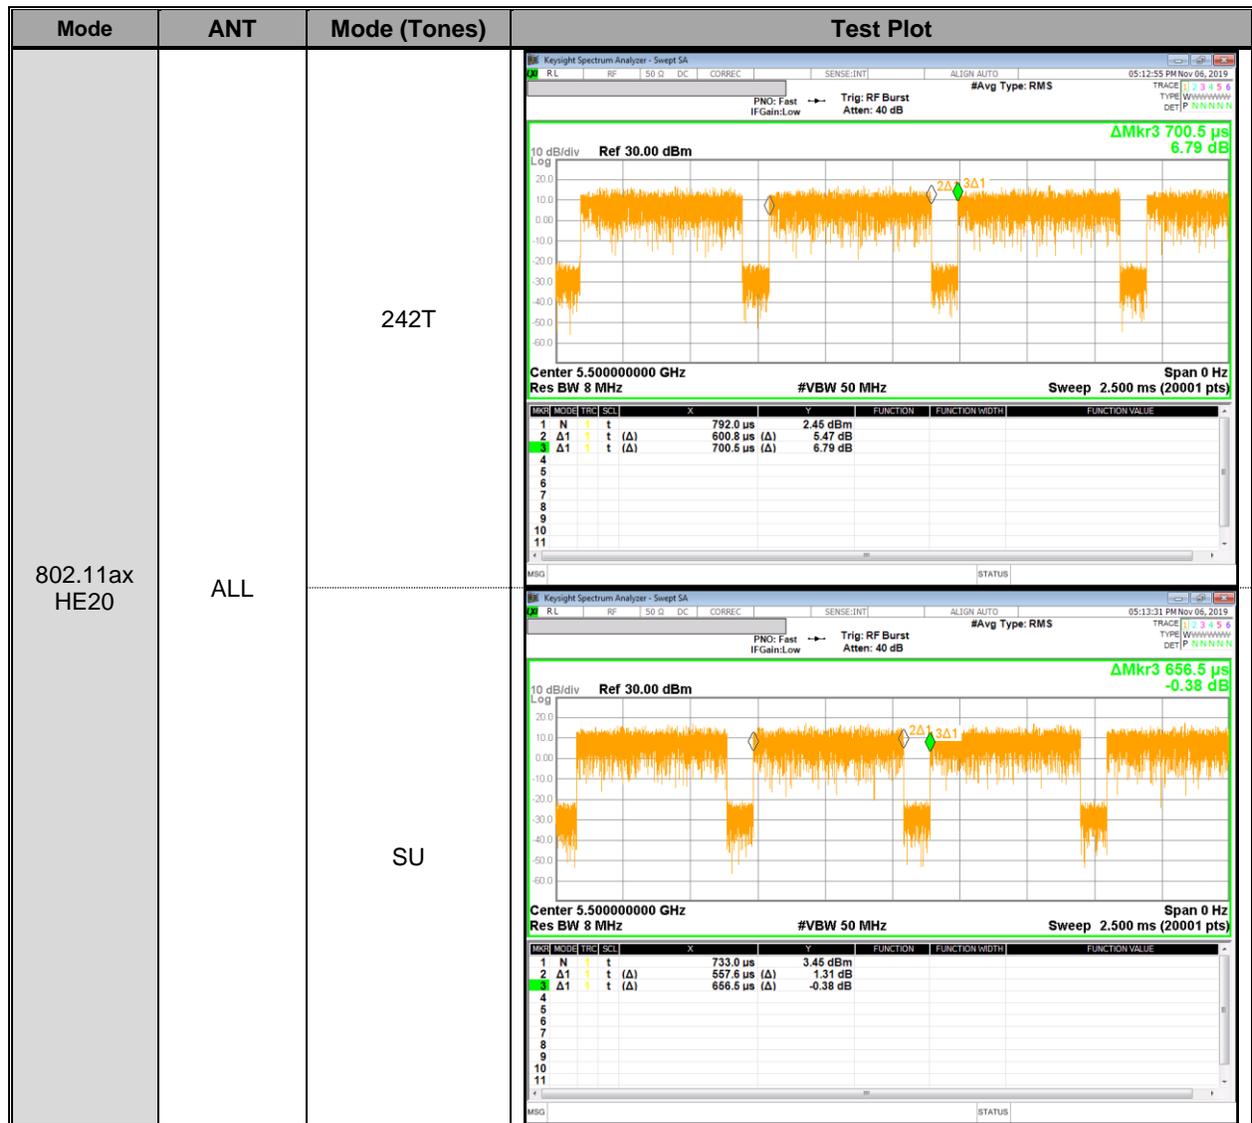


Mode	ANT	Mode (Tones)	Test Plot																																				
		242T	<p>KeySight Spectrum Analyzer - Swept SA PNO: Fast IFGain:Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS 05:19:17 PM Nov 06, 2019</p> <p>10 dB/div Ref 30.00 dBm ΔMkr3 1.222 ms 5.06 dB</p> <p>Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 5.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>1.319 ms</td> <td>1.94 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>1.122 ms (Δ)</td> <td>6.29 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>1.222 ms (Δ)</td> <td>5.06 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		1.319 ms	1.94 dBm				2	Δ 1	t	(Δ)	1.122 ms (Δ)	6.29 dB				3	Δ 1	t	(Δ)	1.222 ms (Δ)	5.06 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		1.319 ms	1.94 dBm																																		
2	Δ 1	t	(Δ)	1.122 ms (Δ)	6.29 dB																																		
3	Δ 1	t	(Δ)	1.222 ms (Δ)	5.06 dB																																		
802.11ax HE40	Single	484T	<p>KeySight Spectrum Analyzer - Swept SA PNO: Fast IFGain:Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS 05:19:59 PM Nov 06, 2019</p> <p>10 dB/div Ref 30.00 dBm ΔMkr3 692.4 μs -2.58 dB</p> <p>Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 3.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>777.2 μs</td> <td>3.24 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>593.0 μs (Δ)</td> <td>-2.85 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>692.4 μs (Δ)</td> <td>-2.58 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		777.2 μ s	3.24 dBm				2	Δ 1	t	(Δ)	593.0 μ s (Δ)	-2.85 dB				3	Δ 1	t	(Δ)	692.4 μ s (Δ)	-2.58 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		777.2 μ s	3.24 dBm																																		
2	Δ 1	t	(Δ)	593.0 μ s (Δ)	-2.85 dB																																		
3	Δ 1	t	(Δ)	692.4 μ s (Δ)	-2.58 dB																																		
		SU	<p>KeySight Spectrum Analyzer - Swept SA PNO: Fast IFGain:Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS 05:21:04 PM Nov 06, 2019</p> <p>10 dB/div Ref 30.00 dBm ΔMkr3 649.4 μs -1.66 dB</p> <p>Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 3.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>740.3 μs</td> <td>4.24 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>550.5 μs (Δ)</td> <td>-2.49 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>649.4 μs (Δ)</td> <td>-1.66 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		740.3 μ s	4.24 dBm				2	Δ 1	t	(Δ)	550.5 μ s (Δ)	-2.49 dB				3	Δ 1	t	(Δ)	649.4 μ s (Δ)	-1.66 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		740.3 μ s	4.24 dBm																																		
2	Δ 1	t	(Δ)	550.5 μ s (Δ)	-2.49 dB																																		
3	Δ 1	t	(Δ)	649.4 μ s (Δ)	-1.66 dB																																		

Mode	ANT	Mode (Tones)	Test Plot																																				
		26T	<p>Keyight Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 5.323 ms -0.13 dB Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 16.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>Msg</th> <th>Mode</th> <th>Trig</th> <th>Scal</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>5.414 ms</td> <td>7.65 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>5.223 ms (Δ)</td> <td>1.88 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>5.323 ms (Δ)</td> <td>-0.13 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Msg	Mode	Trig	Scal	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		5.414 ms	7.65 dBm				2	Δ 1	t (Δ)		5.223 ms (Δ)	1.88 dB				3	Δ 1	t (Δ)		5.323 ms (Δ)	-0.13 dB			
Msg	Mode	Trig	Scal	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		5.414 ms	7.65 dBm																																		
2	Δ 1	t (Δ)		5.223 ms (Δ)	1.88 dB																																		
3	Δ 1	t (Δ)		5.323 ms (Δ)	-0.13 dB																																		
802.11ax HE40	ALL	52T	<p>Keyight Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 2.750 ms 2.66 dB Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 10.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>Msg</th> <th>Mode</th> <th>Trig</th> <th>Scal</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>2.839 ms</td> <td>4.95 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>2.650 ms (Δ)</td> <td>3.70 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>2.750 ms (Δ)</td> <td>2.66 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Msg	Mode	Trig	Scal	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		2.839 ms	4.95 dBm				2	Δ 1	t (Δ)		2.650 ms (Δ)	3.70 dB				3	Δ 1	t (Δ)		2.750 ms (Δ)	2.66 dB			
Msg	Mode	Trig	Scal	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		2.839 ms	4.95 dBm																																		
2	Δ 1	t (Δ)		2.650 ms (Δ)	3.70 dB																																		
3	Δ 1	t (Δ)		2.750 ms (Δ)	2.66 dB																																		
		106T	<p>Keyight Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 1.384 ms 1.64 dB Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 5.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>Msg</th> <th>Mode</th> <th>Trig</th> <th>Scal</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>1.468 ms</td> <td>4.71 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>1.284 ms (Δ)</td> <td>4.08 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>1.384 ms (Δ)</td> <td>1.64 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Msg	Mode	Trig	Scal	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		1.468 ms	4.71 dBm				2	Δ 1	t (Δ)		1.284 ms (Δ)	4.08 dB				3	Δ 1	t (Δ)		1.384 ms (Δ)	1.64 dB			
Msg	Mode	Trig	Scal	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		1.468 ms	4.71 dBm																																		
2	Δ 1	t (Δ)		1.284 ms (Δ)	4.08 dB																																		
3	Δ 1	t (Δ)		1.384 ms (Δ)	1.64 dB																																		

Mode	ANT	Mode (Tones)	Test Plot																																
		242T	<p>Keyight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN: AUTO 05-23-28 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 700.9 μs 1.92 dB Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 3.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>715.6 us</td> <td>4.63 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>600.8 us (Δ)</td> <td>4.43 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>700.9 us (Δ)</td> <td>1.92 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	715.6 us	4.63 dBm				2	Δ1	t (Δ)	600.8 us (Δ)	4.43 dB				3	Δ1	t (Δ)	700.9 us (Δ)	1.92 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	715.6 us	4.63 dBm																															
2	Δ1	t (Δ)	600.8 us (Δ)	4.43 dB																															
3	Δ1	t (Δ)	700.9 us (Δ)	1.92 dB																															
802.11ax HE40	ALL	484T	<p>Keyight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN: AUTO 06-04-12 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 437.4 μs -0.79 dB Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 1.500 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>436.6 us</td> <td>2.71 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>337.6 us (Δ)</td> <td>6.96 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>437.4 us (Δ)</td> <td>-0.79 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	436.6 us	2.71 dBm				2	Δ1	t (Δ)	337.6 us (Δ)	6.96 dB				3	Δ1	t (Δ)	437.4 us (Δ)	-0.79 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	436.6 us	2.71 dBm																															
2	Δ1	t (Δ)	337.6 us (Δ)	6.96 dB																															
3	Δ1	t (Δ)	437.4 us (Δ)	-0.79 dB																															
		SU	<p>Keyight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN: AUTO 05-27-38 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 411.8 μs 3.58 dB Center 5.510000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 1.500 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>469.4 us</td> <td>-1.03 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>312.8 us (Δ)</td> <td>5.88 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>411.8 us (Δ)</td> <td>3.58 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	469.4 us	-1.03 dBm				2	Δ1	t (Δ)	312.8 us (Δ)	5.88 dB				3	Δ1	t (Δ)	411.8 us (Δ)	3.58 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	469.4 us	-1.03 dBm																															
2	Δ1	t (Δ)	312.8 us (Δ)	5.88 dB																															
3	Δ1	t (Δ)	411.8 us (Δ)	3.58 dB																															


Mode	ANT	Mode (Tones)	Test Plot																																				
		26T	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Center 5.530000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 16.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>4.958 ms</td> <td>5.83 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>4.900 ms (Δ)</td> <td>9.29 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>4.934 ms (Δ)</td> <td>-0.08 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		4.958 ms	5.83 dBm				2	Δ 1	t	(Δ)	4.900 ms (Δ)	9.29 dB				3	Δ 1	t	(Δ)	4.934 ms (Δ)	-0.08 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		4.958 ms	5.83 dBm																																		
2	Δ 1	t	(Δ)	4.900 ms (Δ)	9.29 dB																																		
3	Δ 1	t	(Δ)	4.934 ms (Δ)	-0.08 dB																																		
802.11ax HE80	Single	52T	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Center 5.530000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 16.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>5.405 ms</td> <td>6.56 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>5.215 ms (Δ)</td> <td>4.86 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>5.317 ms (Δ)</td> <td>0.61 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		5.405 ms	6.56 dBm				2	Δ 1	t	(Δ)	5.215 ms (Δ)	4.86 dB				3	Δ 1	t	(Δ)	5.317 ms (Δ)	0.61 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		5.405 ms	6.56 dBm																																		
2	Δ 1	t	(Δ)	5.215 ms (Δ)	4.86 dB																																		
3	Δ 1	t	(Δ)	5.317 ms (Δ)	0.61 dB																																		
		106T	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Center 5.530000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 10.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>2.685 ms</td> <td>6.84 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>2.489 ms (Δ)</td> <td>4.56 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>2.590 ms (Δ)</td> <td>0.19 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		2.685 ms	6.84 dBm				2	Δ 1	t	(Δ)	2.489 ms (Δ)	4.56 dB				3	Δ 1	t	(Δ)	2.590 ms (Δ)	0.19 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		2.685 ms	6.84 dBm																																		
2	Δ 1	t	(Δ)	2.489 ms (Δ)	4.56 dB																																		
3	Δ 1	t	(Δ)	2.590 ms (Δ)	0.19 dB																																		

Mode	ANT	Mode (Tones)	Test Plot																																				
		242T	<p>KeySight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN:AUTO 05:53:04 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 1.222 ms 0.84 dB 10 dB/div Log Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 5.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>1.310 ms</td> <td>2.30 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>1.122 ms (Δ)</td> <td>0.87 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>1.222 ms (Δ)</td> <td>0.84 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		1.310 ms	2.30 dBm				2	Δ1	t (Δ)		1.122 ms (Δ)	0.87 dB				3	Δ1	t (Δ)		1.222 ms (Δ)	0.84 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		1.310 ms	2.30 dBm																																		
2	Δ1	t (Δ)		1.122 ms (Δ)	0.87 dB																																		
3	Δ1	t (Δ)		1.222 ms (Δ)	0.84 dB																																		
802.11ax HE80	Single	484T	<p>KeySight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN:AUTO 05:53:43 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 692.7 μs 0.11 dB 10 dB/div Log Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 3.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>785.3 μs</td> <td>1.88 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>592.9 μs (Δ)</td> <td>-5.16 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>692.7 μs (Δ)</td> <td>0.11 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		785.3 μs	1.88 dBm				2	Δ1	t (Δ)		592.9 μs (Δ)	-5.16 dB				3	Δ1	t (Δ)		692.7 μs (Δ)	0.11 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		785.3 μs	1.88 dBm																																		
2	Δ1	t (Δ)		592.9 μs (Δ)	-5.16 dB																																		
3	Δ1	t (Δ)		692.7 μs (Δ)	0.11 dB																																		
		996T	<p>KeySight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN:AUTO 05:54:27 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 419.7 μs -3.35 dB 10 dB/div Log Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 1.500 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>506.5 μs</td> <td>-0.36 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>319.2 μs (Δ)</td> <td>2.11 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td></td> <td>419.7 μs (Δ)</td> <td>-3.35 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		506.5 μs	-0.36 dBm				2	Δ1	t (Δ)		319.2 μs (Δ)	2.11 dB				3	Δ1	t (Δ)		419.7 μs (Δ)	-3.35 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		506.5 μs	-0.36 dBm																																		
2	Δ1	t (Δ)		319.2 μs (Δ)	2.11 dB																																		
3	Δ1	t (Δ)		419.7 μs (Δ)	-3.35 dB																																		

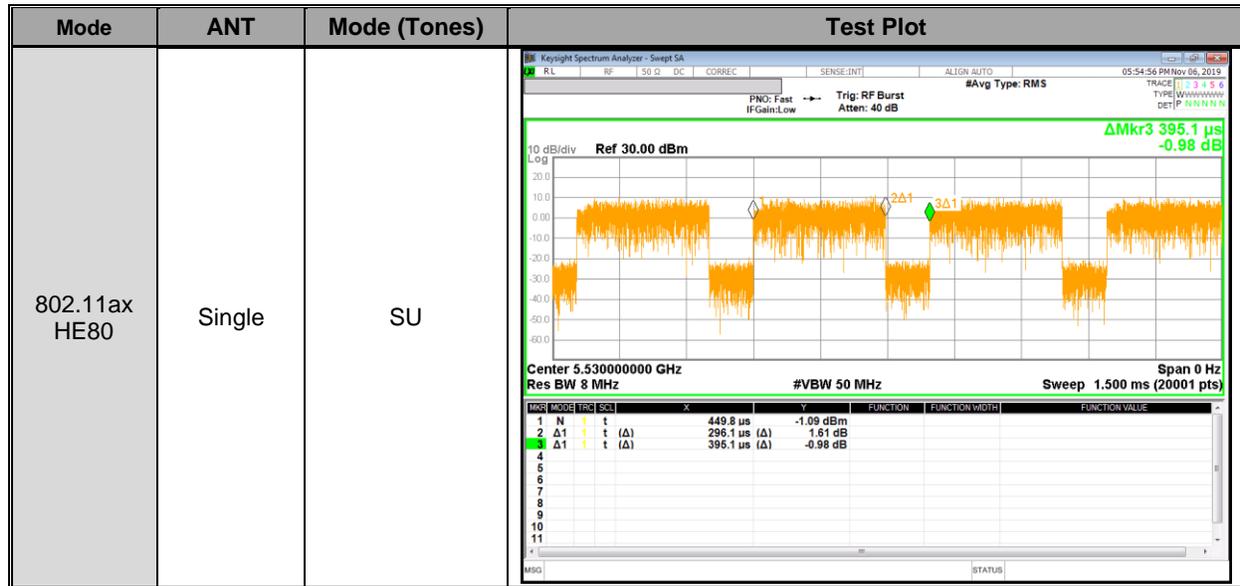

Mode	ANT	Mode (Tones)	Test Plot																																
		26T	<p>Keyight Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 5.323 ms 0.12 dB Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 16.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>5.419 ms</td> <td>6.00 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>5.222 ms (Δ)</td> <td>9.63 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>5.323 ms (Δ)</td> <td>0.12 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	5.419 ms	6.00 dBm				2	Δ1	t (Δ)	5.222 ms (Δ)	9.63 dB				3	Δ1	t (Δ)	5.323 ms (Δ)	0.12 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	5.419 ms	6.00 dBm																															
2	Δ1	t (Δ)	5.222 ms (Δ)	9.63 dB																															
3	Δ1	t (Δ)	5.323 ms (Δ)	0.12 dB																															
802.11ax HE80	ALL	52T	<p>Keyight Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 2.750 ms -1.03 dB Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 10.00 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>2.846 ms</td> <td>7.08 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>2.649 ms (Δ)</td> <td>5.86 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>2.750 ms (Δ)</td> <td>-1.03 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	2.846 ms	7.08 dBm				2	Δ1	t (Δ)	2.649 ms (Δ)	5.86 dB				3	Δ1	t (Δ)	2.750 ms (Δ)	-1.03 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	2.846 ms	7.08 dBm																															
2	Δ1	t (Δ)	2.649 ms (Δ)	5.86 dB																															
3	Δ1	t (Δ)	2.750 ms (Δ)	-1.03 dB																															
		106T	<p>Keyight Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 1.384 ms 3.17 dB Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 5.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td>1.460 ms</td> <td>3.14 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t (Δ)</td> <td>1.284 ms (Δ)</td> <td>8.27 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t (Δ)</td> <td>1.384 ms (Δ)</td> <td>3.17 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t	1.460 ms	3.14 dBm				2	Δ1	t (Δ)	1.284 ms (Δ)	8.27 dB				3	Δ1	t (Δ)	1.384 ms (Δ)	3.17 dB			
MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																												
1	N	t	1.460 ms	3.14 dBm																															
2	Δ1	t (Δ)	1.284 ms (Δ)	8.27 dB																															
3	Δ1	t (Δ)	1.384 ms (Δ)	3.17 dB																															

Mode	ANT	Mode (Tones)	Test Plot																																				
		242T	<p>KeySight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN: AUTO 05:59:28 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 701.0 μs 0.91 dB 10 dB/div Log Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 3.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>793.2 us</td> <td>1.49 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>600.9 us (Δ)</td> <td>0.85 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>701.0 us (Δ)</td> <td>0.91 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		793.2 us	1.49 dBm				2	Δ1	t	(Δ)	600.9 us (Δ)	0.85 dB				3	Δ1	t	(Δ)	701.0 us (Δ)	0.91 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		793.2 us	1.49 dBm																																		
2	Δ1	t	(Δ)	600.9 us (Δ)	0.85 dB																																		
3	Δ1	t	(Δ)	701.0 us (Δ)	0.91 dB																																		
802.11ax HE80	ALL	484T	<p>KeySight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN: AUTO 06:00:07 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 437.9 μs -1.50 dB 10 dB/div Log Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 1.500 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>527.5 us</td> <td>2.61 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>337.5 us (Δ)</td> <td>-1.78 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>437.9 us (Δ)</td> <td>-1.50 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		527.5 us	2.61 dBm				2	Δ1	t	(Δ)	337.5 us (Δ)	-1.78 dB				3	Δ1	t	(Δ)	437.9 us (Δ)	-1.50 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		527.5 us	2.61 dBm																																		
2	Δ1	t	(Δ)	337.5 us (Δ)	-1.78 dB																																		
3	Δ1	t	(Δ)	437.9 us (Δ)	-1.50 dB																																		
		996T	<p>KeySight Spectrum Analyzer - Swept SA RL RF 50 Ω DC CORREC SENSE:INT ALIGN: AUTO 06:00:51 PM Nov 06, 2019 PNO: Fast IF Gain: Low Trig: RF Burst Atten: 40 dB #Avg Type: RMS Ref 30.00 dBm ΔMkr3 301.7 μs 2.29 dB 10 dB/div Log Center 5.530000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz Sweep 1.000 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>MOE</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>t</td> <td></td> <td>311.2 us</td> <td>-4.24 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>201.6 us (Δ)</td> <td>4.85 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ1</td> <td>t</td> <td>(Δ)</td> <td>301.7 us (Δ)</td> <td>2.29 dB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	t		311.2 us	-4.24 dBm				2	Δ1	t	(Δ)	201.6 us (Δ)	4.85 dB				3	Δ1	t	(Δ)	301.7 us (Δ)	2.29 dB			
MOE	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	t		311.2 us	-4.24 dBm																																		
2	Δ1	t	(Δ)	201.6 us (Δ)	4.85 dB																																		
3	Δ1	t	(Δ)	301.7 us (Δ)	2.29 dB																																		

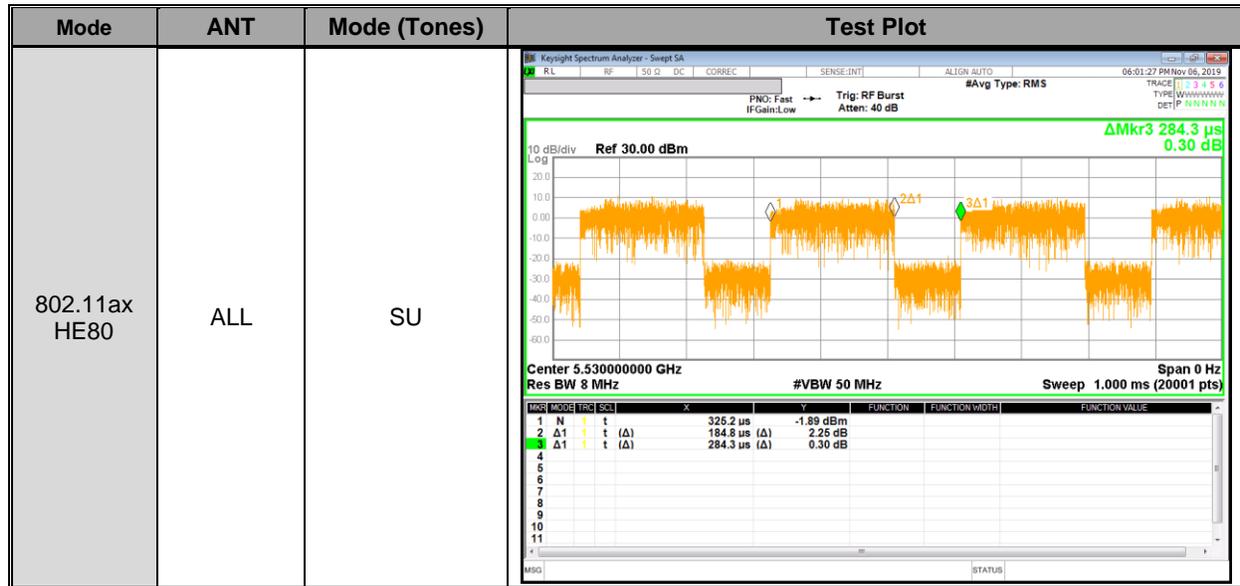

9.2. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01:

The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 26dB Bandwidth of RU allocation and channels included to straddle band in UNII-2C and UNII-3 Straddle Channel

- ex) Marker 2: Lower point of 26 dB bandwidth
Marker 3: Upper point of 26 dB bandwidth
 - Turning Frequency : 5725MHz
 - Marker 2: 5710 MHz
 - Marker 3: 5730 MHz
 - 26dB Bandwidth of UNII-2C band Portion
= (5725 – 5710) = 15 MHz
 - 26dB Bandwidth of UNII-3 band Portion
= (5730 - 5725) = 5 MHz

RESULTS

See the next page.

9.2.1. 802.11ax 5.2 GHz BAND

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]	
					ANT1	ANT2
UNII-1	HE20	5180	26T	0	20.01	20.04
				4	19.09	19.02
				8	20.43	20.23
			SU	-	21.59	21.37
		5200	26T	0	19.92	19.82
				4	18.78	18.41
				8	20.40	19.71
			SU	-	21.63	21.48
		5240	26T	0	19.83	19.65
				4	19.13	18.89
				8	20.58	20.60
			SU	-	21.51	21.41
	HE40	5190	26T	0	19.92	19.76
				9	22.87	22.17
				17	20.26	20.44
			SU	-	39.83	39.68
		5230	26T	0	19.86	19.71
				9	23.52	23.31
				17	19.26	19.93
			SU	-	39.76	39.75
	HE80	5210	26T	0	19.84	19.85
				18	39.20	39.09
				36	22.62	22.40
			SU	-	80.60	81.49

9.2.2. 802.11ax 5.3 GHz BAND

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]			
					ANT1	ANT2		
UNII-2A	HE20	5260	26T	0	19.96	19.70		
				4	18.92	19.18		
				8	20.65	20.58		
			SU	-	21.43	21.59		
		5300	26T	0	19.95	19.91		
				4	19.29	18.54		
				8	20.63	20.54		
			SU	-	21.32	21.58		
		5320	26T	0	19.86	19.67		
				4	18.96	18.58		
				8	20.72	20.43		
			SU	-	21.44	21.50		
	HE40	5270	26T	0	18.13	19.93		
				9	23.40	22.93		
				17	20.43	19.91		
			SU	-	39.96	39.80		
			5310	26T	0	19.88	19.61	
					9	23.73	22.72	
		17			19.50	20.60		
		SU		-	39.79	39.69		
		HE80		5290	26T	0	19.89	20.85
						18	40.40	39.74
			36			21.09	22.07	
			SU		-	80.82	81.10	

9.2.3. 802.11ax 5.5 GHz BAND

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]	
					ANT1	ANT2
UNII-2C	HE20	5500	26T	0	19.98	19.73
				4	19.08	18.47
				8	20.51	20.46
			SU	-	21.46	21.57
		5580	26T	0	19.89	19.73
				4	19.07	19.02
				8	20.40	20.69
			SU	-	21.48	21.30
		5700	26T	0	20.04	19.64
				4	18.98	18.92
				8	20.61	20.61
			SU	-	21.65	21.41
	HE40	5510	26T	0	19.56	19.51
				9	22.17	22.26
				17	20.15	20.19
			SU	-	39.74	39.98
		5590	26T	0	19.84	19.51
				9	22.65	22.92
				17	20.26	19.70
			SU	-	39.68	39.77
		5670	26T	0	19.86	19.33
				9	23.07	22.95
				17	20.44	20.44
			SU	-	39.71	39.80
HE80	5530	26T	0	20.99	20.42	
			18	41.22	38.16	
			36	21.29	22.79	
		SU	-	80.77	80.81	
	5610	26T	0	20.48	20.92	
			18	40.45	39.89	
			36	23.16	20.93	
		SU	-	80.83	80.91	

9.2.4. 802.11ax STRADDLE CHANNEL

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]			
					ANT1		ANT2	
					UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	HE20	5720	26T	6	15.06	4.02	14.97	4.09
			SU	-	15.57	5.59	15.66	5.70
	HE40	5710	26T	16	15.17	4.14	15.43	4.34
			SU	-	34.92	4.91	35.01	4.66
	HE80	5690	26T	35	16.70	4.89	17.22	4.69
			SU	-	75.84	5.398	75.67	5.02

9.2.5. TEST PLOT_802.11ax 5.2 GHz BAND



