



# **CERTIFICATION TEST REPORT**

**Report Number.** : 4789247757-E9V2

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-G985F/DS, SM-G985F

**FCC ID** : A3LSMG985F

**EUT Description** : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
ANT+, NFC and WPT

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

December 17, 2019

**Prepared by:**

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



**Testing Laboratory**

**TL-637**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	12/12/19	Initial issue	Sangyun Kim
V2	12/17/19	Updated to address TCB's question	Sangyun Kim

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
1.1. INTRODUCTION OF TEST DATA REUSE .....	5
1.2. DIFFERENCE .....	5
1.3. SPOT CHECK VERIFICATION DATA.....	5
1.4. REFERENCE DETAIL.....	6
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	8
4.2. SAMPLE CALCULATION.....	8
4.3. MEASUREMENT UNCERTAINTY .....	8
4.4. DECISION RULE .....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. DESCRIPTION OF EUT.....	9
5.2. MAXIMUM E-FIELD STRENGTH.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	9
5.4. WORST-CASE CONFIGURATION AND MODE .....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>7. LIMITS AND RESULTS.....</b>	<b>13</b>
7.1. 99% BANDWIDTH .....	13
7.2. TRANSMITTER RADIATED EMISSIONS .....	15
7.2.1. DUTY CYCLE .....	17
7.2.1. FUNDAMENTAL FIELD STRENGTH LEVEL .....	18
7.2.2. TRANSMITTER BAND EDGES .....	24
7.2.3. HARMONICS AND SPURIOUS EMISSIONS .....	28
7.2.4. SPURIOUS BELOW 1 GHz .....	34
<b>8. AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>36</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT

**MODEL NUMBER:** SM-G985F/DS, SM-G985F

**SERIAL NUMBER:** R3CM90FSA4H (CONDUCTED, Original);  
R3CM90FS8HH (RADIATED, Original);  
R38MA0KHL8H (Spot check);

**DATE TESTED:** OCT 20, 2019 – OCT 25, 2019 (Original);  
NOV 15, 2019 (Spot check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Sangyun Kim  
Suwon Lab Engineer  
UL Korea, Ltd.

## 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMG986B DXX ANT+(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

## 1.2. DIFFERENCE

The FCC ID: A3LSMG985F shares the same enclosure and circuit board as FCC ID: A3LSMG986B. The ANT+ antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG986B remains representative of FCC ID: A3LSMG985F. The test data of FCC ID: A3LSMG986B being submitted for this application to cover ANT+ features.

## 1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated spurious and band edge emissions)

Mode	Test Item	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
				SM-G986B/DS	SM-G985F/DS		
				FCC ID : A3LSMG986B	FCC ID : A3LSMG985F		
ANT+	Fundamental	2480 MHz	114 dBuV/m	98.25 dBuV/m	100.40 dBuV/m	2.15 dB	-
	Band Edge	2480 MHz	74 dBuV/m	55.56 dBuV/m	52.36 dBuV/m	-3.20 dB	-
	RSE	2480 MHz	74 dBuV/m	48.35 dBuV/m	49.11 dBuV/m	0.76 dB	-

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

### 1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
PCE	A3LSMG986B	Original Grant	4789219881-E2	Test Report	4789247757-E2	All
DTS	A3LSMG986B	Original Grant	4789219881-E3 (802.11b/g/n)	Test Report	4789247757-E3 (802.11b/g/n)	All
			4789219881-E4 (802.11ax)	Test Report	4789247757-E4 (802.11ax)	All
			4789219881-E5 Bluetooth LE	Test Report	4789247757-E5 Bluetooth LE	All
DSS	A3LSMG986B	Original Grant	4789219881-E6 (Bluetooth)	Test Report	4789247757-E6 (Bluetooth)	All
NII	A3LSMG986B	Original Grant	4789219881-E7 (802.11a/n/ac)	Test Report	4789247757-E7 (802.11a/n/ac)	All
			4789219881-E8 (802.11ax)	Test Report	4789247757-E8 (802.11ax)	All
DXX	A3LSMG986B	Original Grant	4789219881-E9 (ANT+)	Test Report	4789247757-E9 (ANT+)	All
			4789219881-E10 (NFC)	Test Report	4789247757-E10 (NFC)	All
DCD	A3LSMG986B	Original Grant	4789219881-E11 (WPT)	Test Report	4789247757-E11 (WPT)	All

For this application the data reuse is summarized below for each equipment class:

Equipment Class	Reference FCC ID (Parent)	Application Type	Test Item	Data Re-used
PCE	A3LSMG986B	Original Grant	WWAN	All except SAR (full test), HAC (full test)
DTS	A3LSMG986B	Original Grant	BLE	All
			WLAN	All except SAR (full test), HAC (full test)
			WLAN 802.11ax	All except HAC (full test)
DSS	A3LSMG986B	Original Grant	BT	All except SAR (full test)
NII	A3LSMG986B	Original Grant	WLAN	All except SAR (full test), HAC (full test)
			WLAN 802.11ax	All except HAC (full test)
DXX	A3LSMG986B	Original Grant	ANT+	All
			NFC	All
DCD	A3LSMG986B	Original Grant	WPT	All except RF exposure

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02
4. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/wp-content/uploads/2017/05/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.35 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.49 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.82 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT. This test report addresses the ANT+ operational mode.

This report covers the Samsung models SM-G985F/DS, SM-G985F. These models are identical in hardware except SM-G985F has single SIM tray and model. With some pre-scan, model SM-G985F/DS was set for spot check test.

### 5.2. MAXIMUM E-FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range [MHz]	Mode	Peak E-field Strength [dBuV/m]	Avg E-field Strength [dBuV/m]	Distance [m]
2402 - 2480	ANT +	98.25	68.04	3.00

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -6.46 dBi

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note : All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37M5DX86X1SE3	N/A
Data Cable	SAMSUNG	EP-DG977	N/A	N/A


### I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0m	N/A


### TEST SETUP

The EUT is set to continuously transmit in ANT + test mode.  
 Test software in hidden menu exercised the EUT to enable ANT+ mode.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

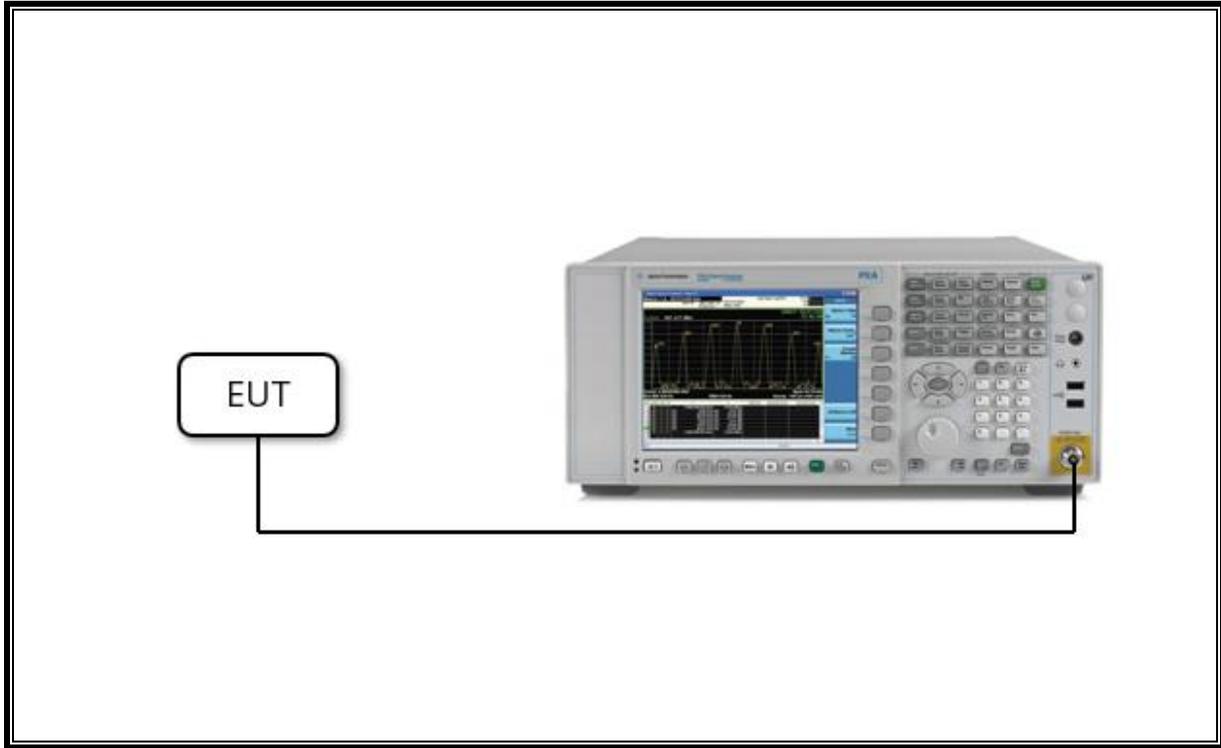

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

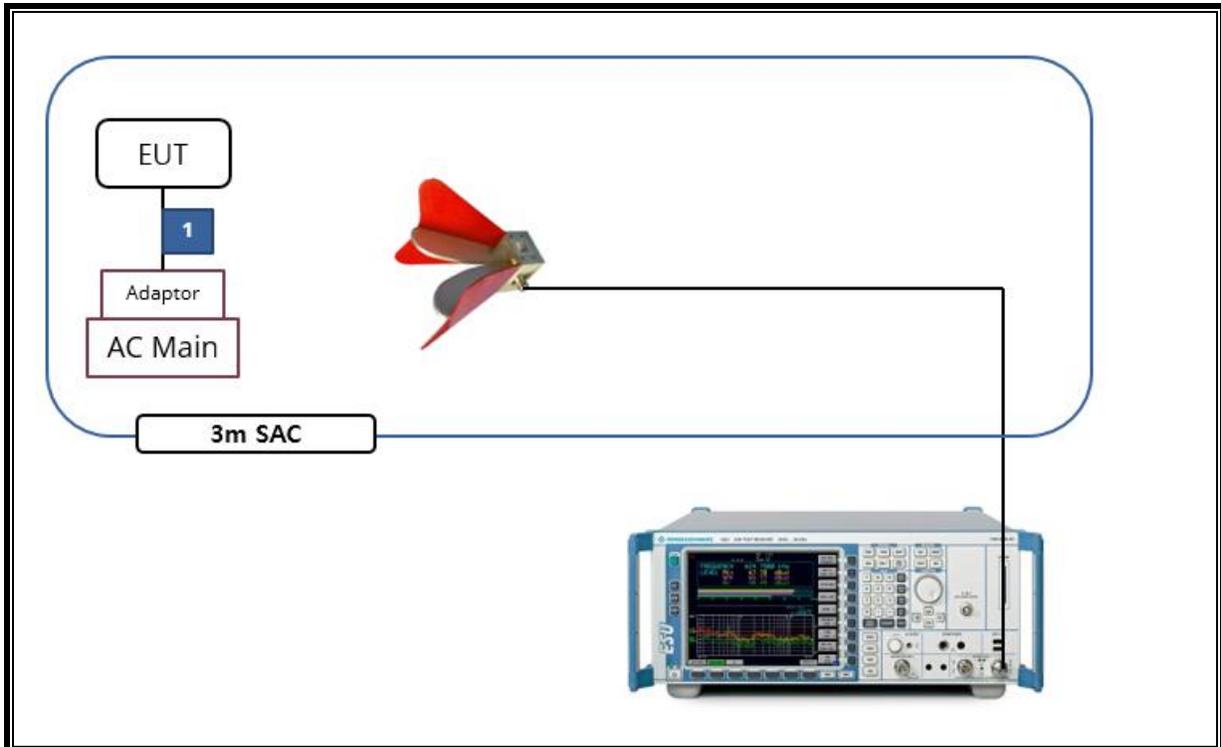

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	New Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-08-20
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-05-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-20
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-20
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-09-20
Attenuator	PASTERNAK	PE7087-10	A001	08-08-20
Attenuator	PASTERNAK	PE7087-10	A008	08-08-20
Attenuator	PASTERNAK	PE7004-10	2	08-06-20
Attenuator	PASTERNAK	PE7087-10	A009	08-08-20
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-20
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-20
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-05-20
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-05-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-20
LISN	R&S	ENV-216	101837	08-09-20
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
<b>Antenna, Loop, 9kHz-30MHz</b>				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. LIMITS AND RESULTS

### 7.1. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS


Channel	Frequency [MHz]	99% Bandwidth [kHz]	20 dB Bandwidth [kHz]
Low	2402	1008.0	1033.0
Mid	2441	1007.9	1033.0
High	2480	1009.9	1032.0
Worst		1009.9	1033.0

**99% BANDWIDTH PLOTS**


**LOW CHANNEL**

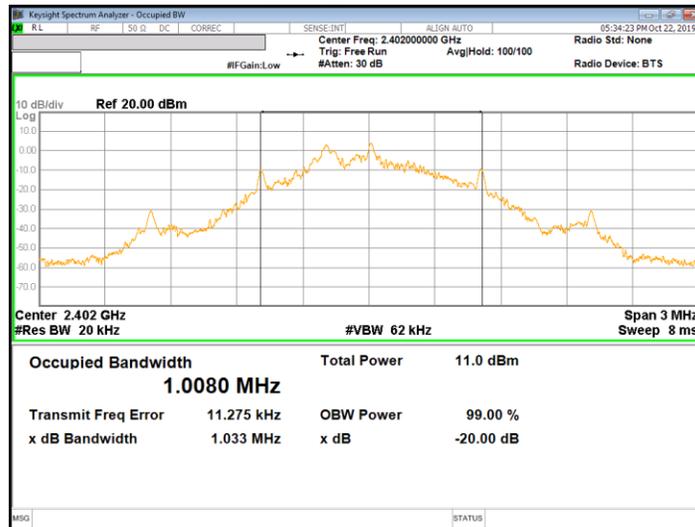

**MID CHANNEL**

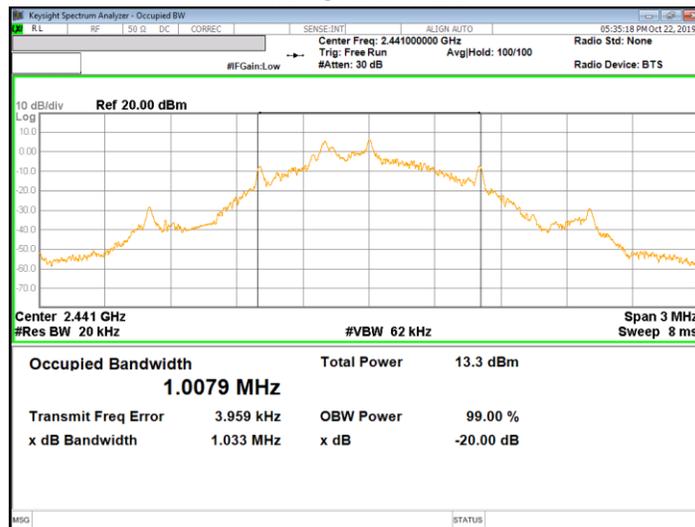

**HIGH CHANNEL**

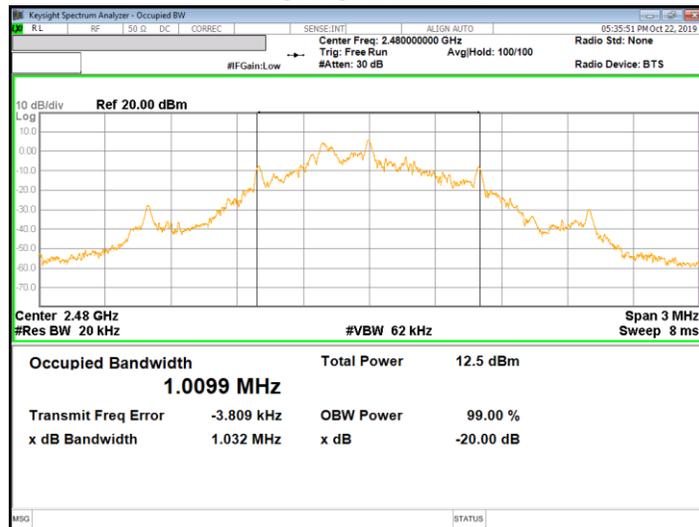

## 7.2. TRANSMITTER RADIATED EMISSIONS

### TEST PROCEDURE

ANSI C63.10: 2013

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

### LIMIT

FCC §15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
 Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
 Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


**RESULTS**

**7.2.1. DUTY CYCLE**



## 7.2.1. FUNDAMENTAL FIELD STRENGTH LEVEL

### LOW CHANNEL, HORIZONTAL

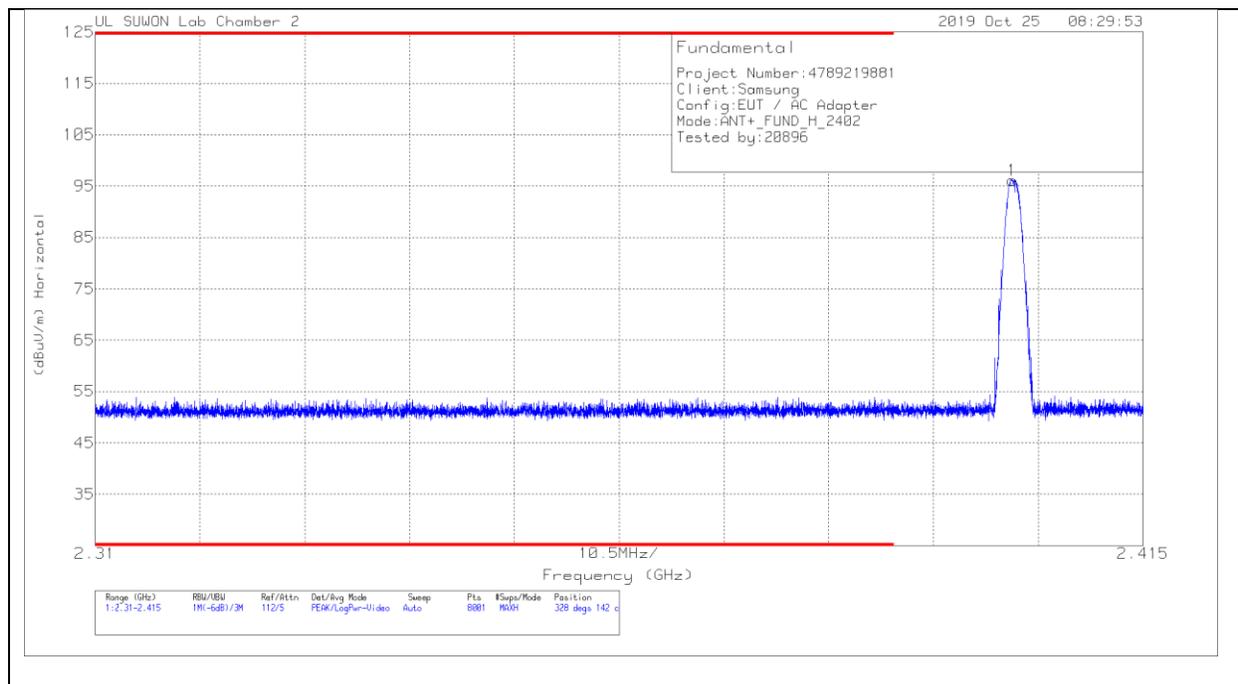

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.40189	85	Pk	31.7	-20.6	96.1	328	142	H

### Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
96.1	114	17.9


\*\* For marker 1 used the following method to do averaging:

DCCF = -30.21

Corrected AV reading = Peak Reading + DCCF

= 96.1 + -30.21 = 65.89 dBuV/m AVG Limit : 94 dBuV/m, Margin 28.11 dB]

**LOW CHANNEL, VERTICAL**

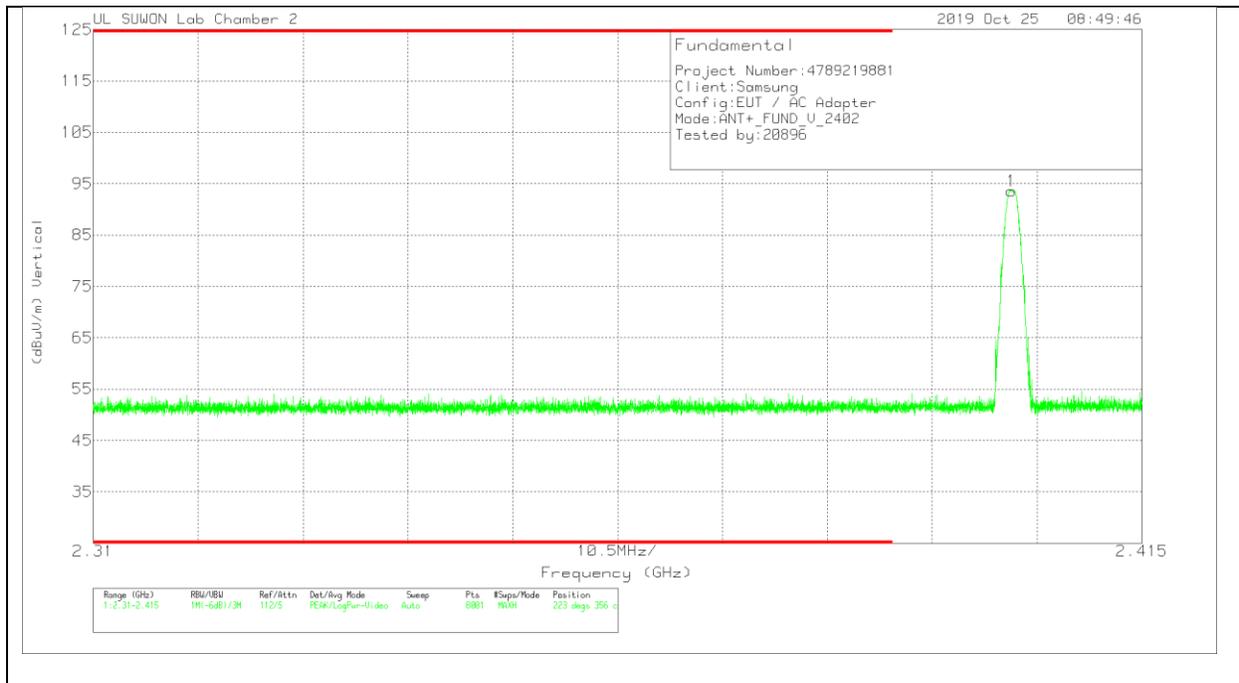

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.40193	82.53	Pk	31.7	-20.6	93.63	223	356	V

Pk - Peak detector

\*

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
93.63	114	20.37


\*\* For marker 1 used the following method to do averaging:

DCCF = -30.21

Corrected AV reading = Peak Reading + DCCF

= 93.63 + -30.21 = 63.42 dBuV/m ; AVG Limit : 94 dBuV/m, Margin 30.58 dB]

**MID CHANNEL, HORIZONTAL**

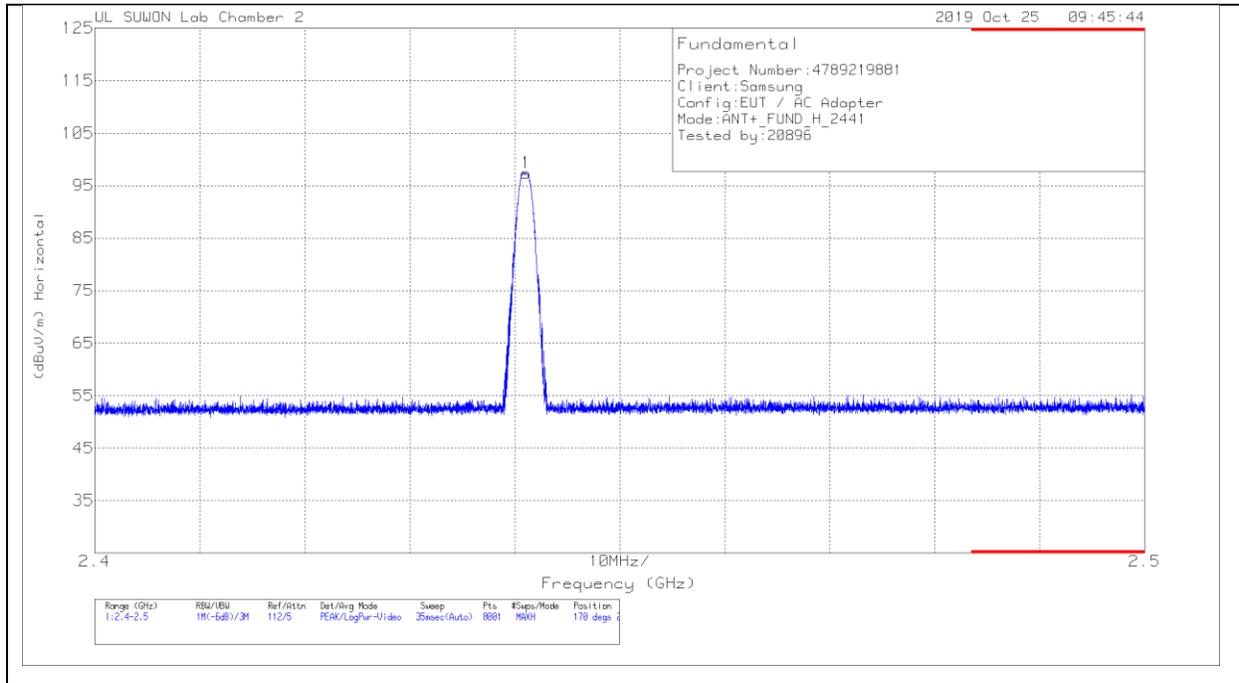

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.44109	86.1	Pk	31.8	-20.5	97.4	170	274	H

Pk - Peak detector

\*

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
97.4	114	16.6


\*\* For marker 1 used the following method to do averaging:

DCCF = -30.21

Corrected AV reading = Peak Reading + DCCF

= 97.4 + -30.21 = 67.19 dBuV/m AVG Limit : 94 dBuV/m, Margin 26.81 dB

**MID CHANNEL, VERTICAL**

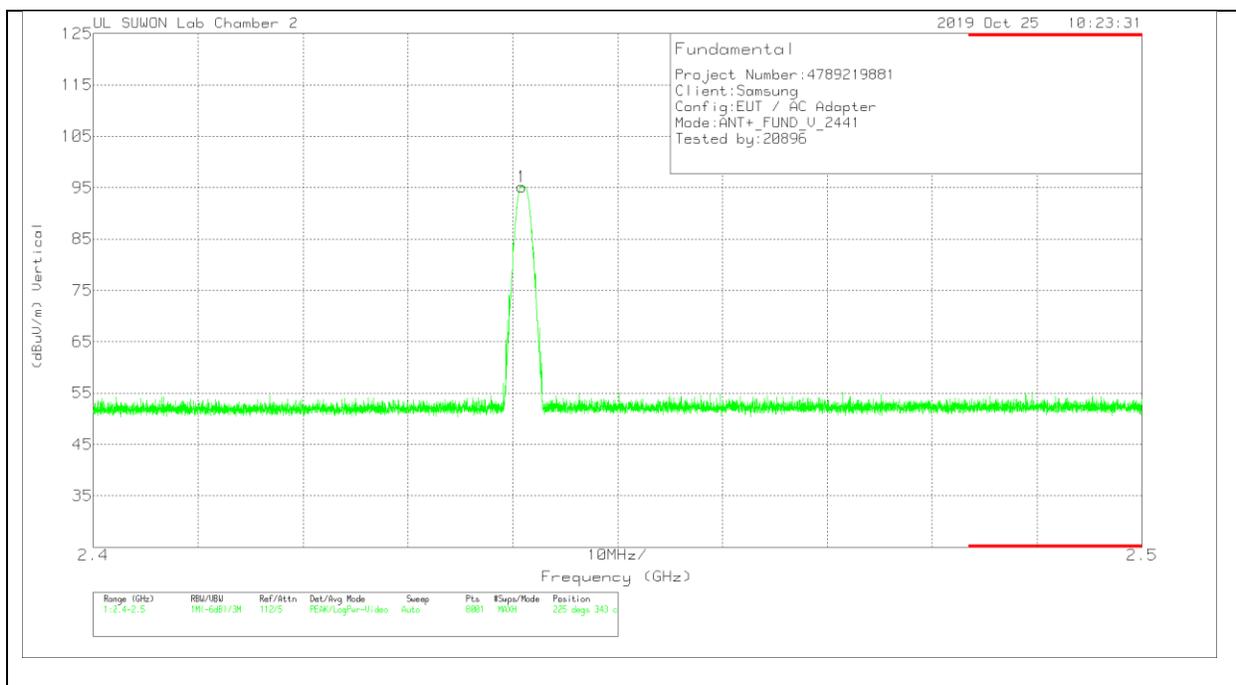

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.44089	83.9	Pk	31.8	-20.5	95.2	225	343	V

Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
95.2	114	18.8


\*\* For marker 1 used the following method to do averaging:

DCCF = -30.21

Corrected AV reading = Peak Reading + DCCF

= 95.2 + -30.21 = 64.99 dBuV/m, AVG Limit : 94 dBuV/m, Margin 29.01 dB

**HIGH CHANNEL, HORIZONTAL**

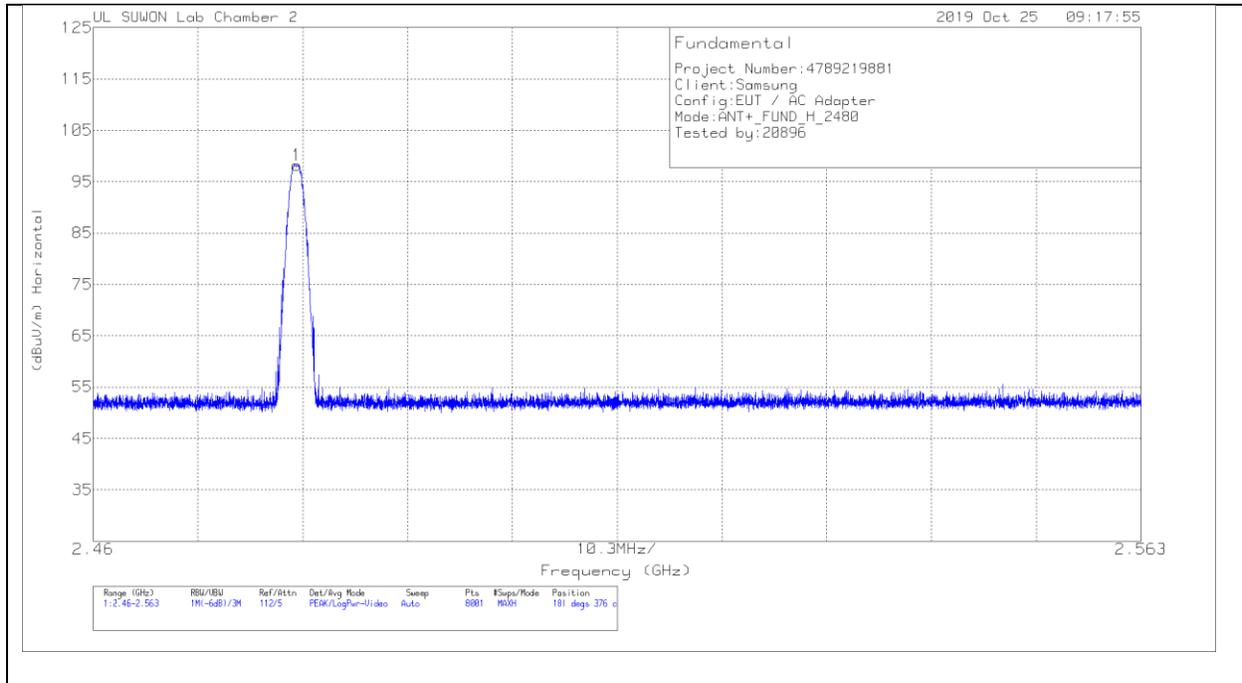

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.47999	86.85	Pk	31.9	-20.5	98.25	181	376	H

Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
98.25	114	15.75


\*\* For marker 1 used the following method to do averaging:

DCCF = -30.21

Corrected AV reading = Peak Reading + DCCF

= 98.25 + -30.21 = 68.04 dBuVm AVG Limit : 94 dBuVm, Margin 25.96 dB]

**HIGH CHANNEL, VERTICAL**

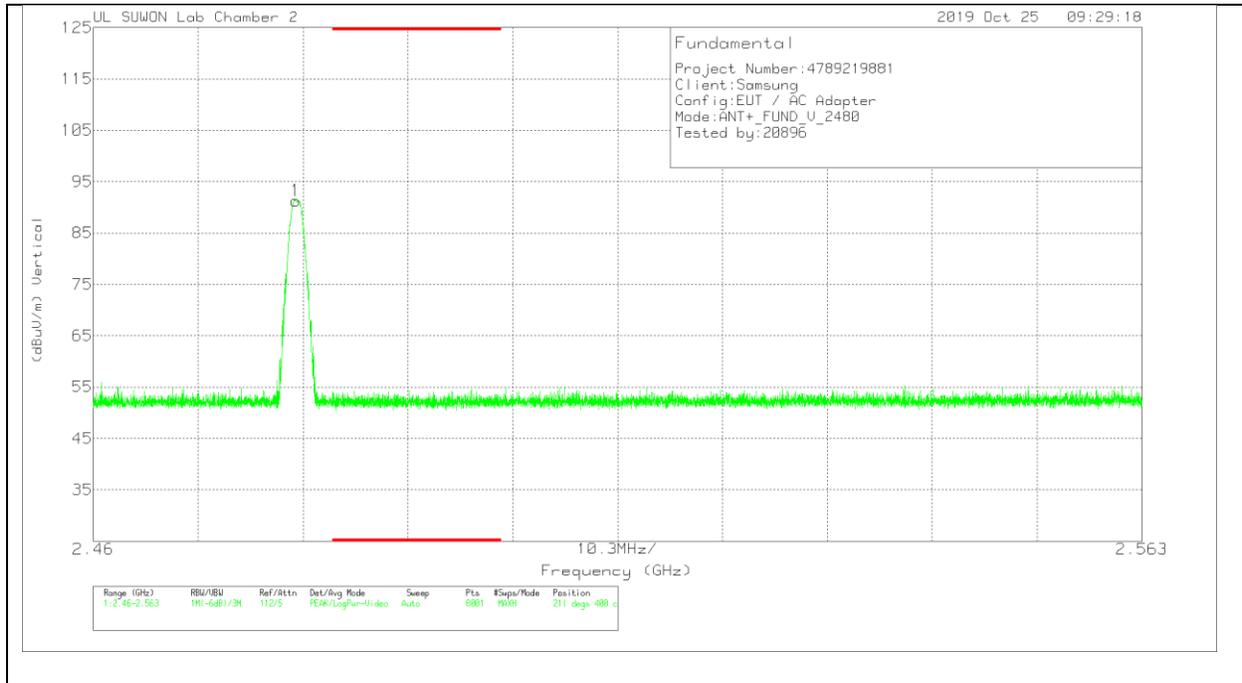

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.47989	79.93	Pk	31.9	-20.5	91.33	211	400	V

Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
91.33	114	22.67

\*\* For marker 1 used the following method to do averaging:

DCCF = -30.21


Corrected AV reading = Peak Reading + DCCF

= 91.33 + -30.21 = 61.12 dBuV/m; AVG Limit : 94 dBuV/m, Margin 32.88 dB

## 7.2.2. TRANSMITTER BAND EDGES

### AUTHORIZED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

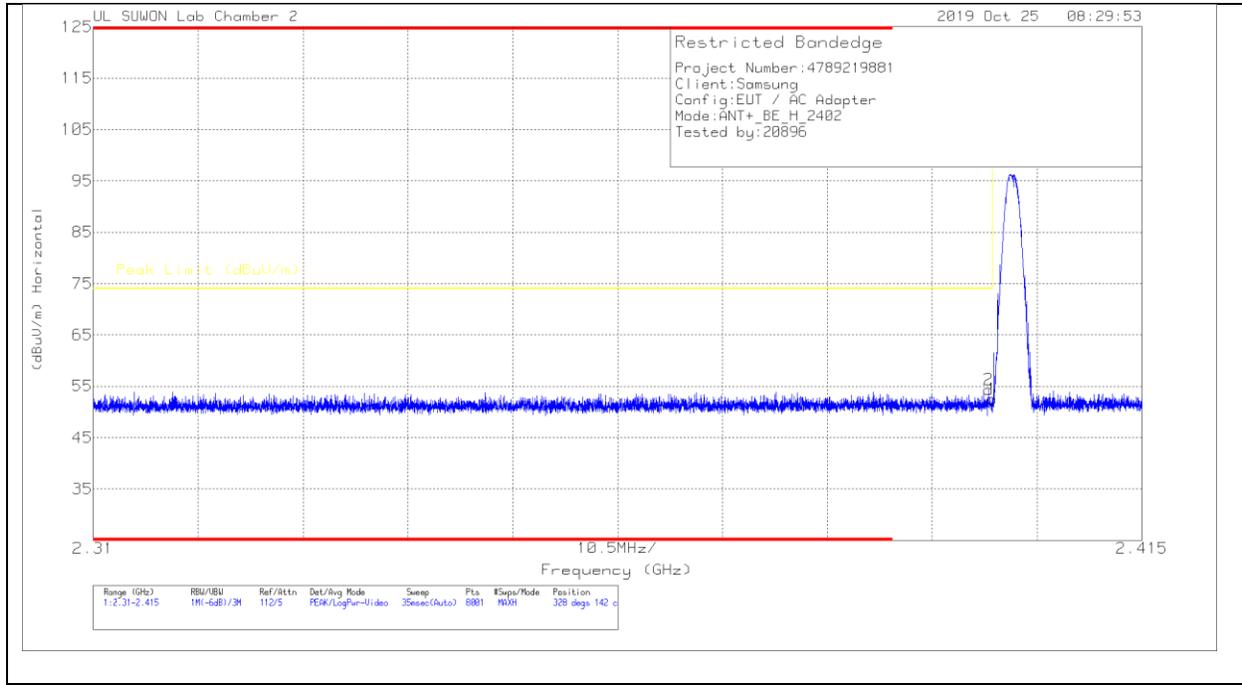

#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	41.39	Pk	31.7	-20.6	52.49	74	-21.51	328	142	H
2	2.39963	43.21	Pk	31.7	-20.6	54.31	74	-19.69	328	142	H

Pk - Peak detector

\* For marker 1 used the following method to do averaging:

$$DCCF = -30.21 \quad / \quad \text{Peak Reading} = 52.49 \text{ dBuV/m}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 52.49 + -30.21 = 22.28 \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin 31.72 dB}$$


\* For marker 2 used the following method to do averaging:

$$DCCF = -30.21 \quad / \quad \text{Peak Reading} = 54.31 \text{ dBuV/m}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 54.31 + -30.21 = 24.1 \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin 29.9 dB}$$

**VERTICAL PEAK AND AVERAGE PLOT**

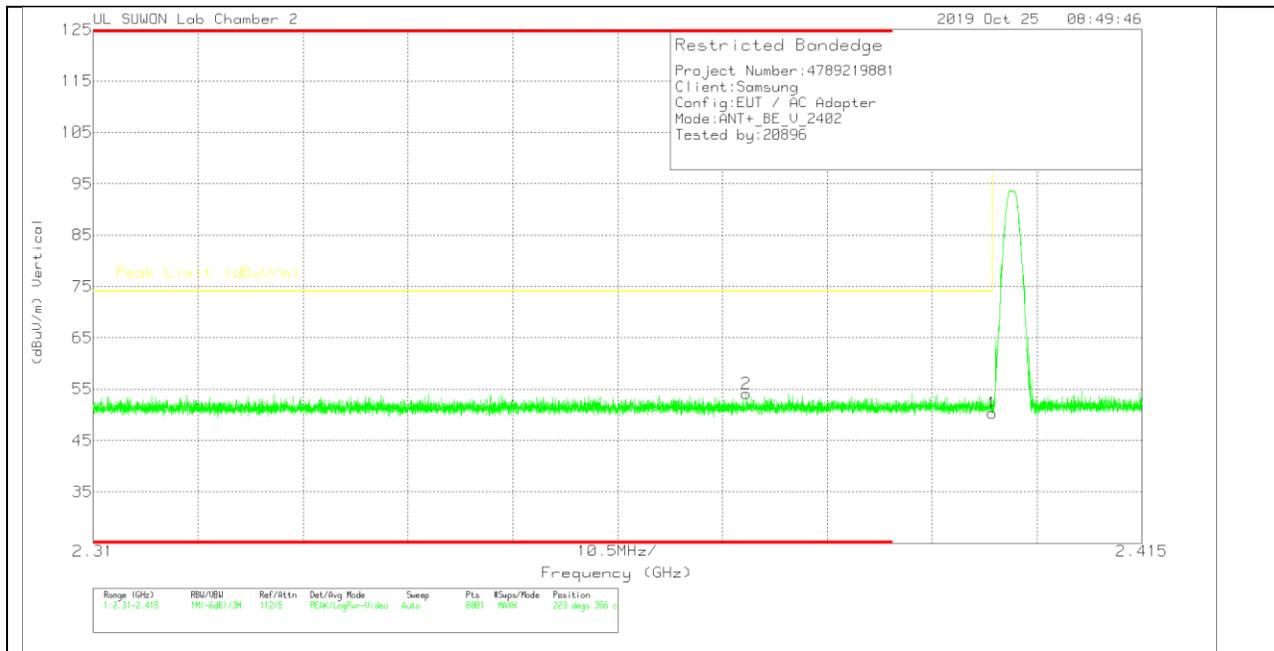

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	39.22	Pk	31.7	-20.6	50.32	74	-23.68	223	356	V
2	* 2.37536	43.15	Pk	31.6	-20.6	54.15	74	-19.85	223	356	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

\* For marker 1 used the following method to do averaging:

$$DCCF = -30.21 \quad / \quad \text{Peak Reading} = \underline{50.32} \text{ dBuV/m}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 50.32 + -30.21 = \underline{20.11} \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin } \underline{33.89} \text{ dB}$$

\* For marker 2 used the following method to do averaging:


$$DCCF = -30.21 \quad / \quad \text{Peak Reading} = \underline{54.15} \text{ dBuV/m}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 54.15 + -30.21 = \underline{23.94} \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin } \underline{30.06} \text{ dB}$$

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

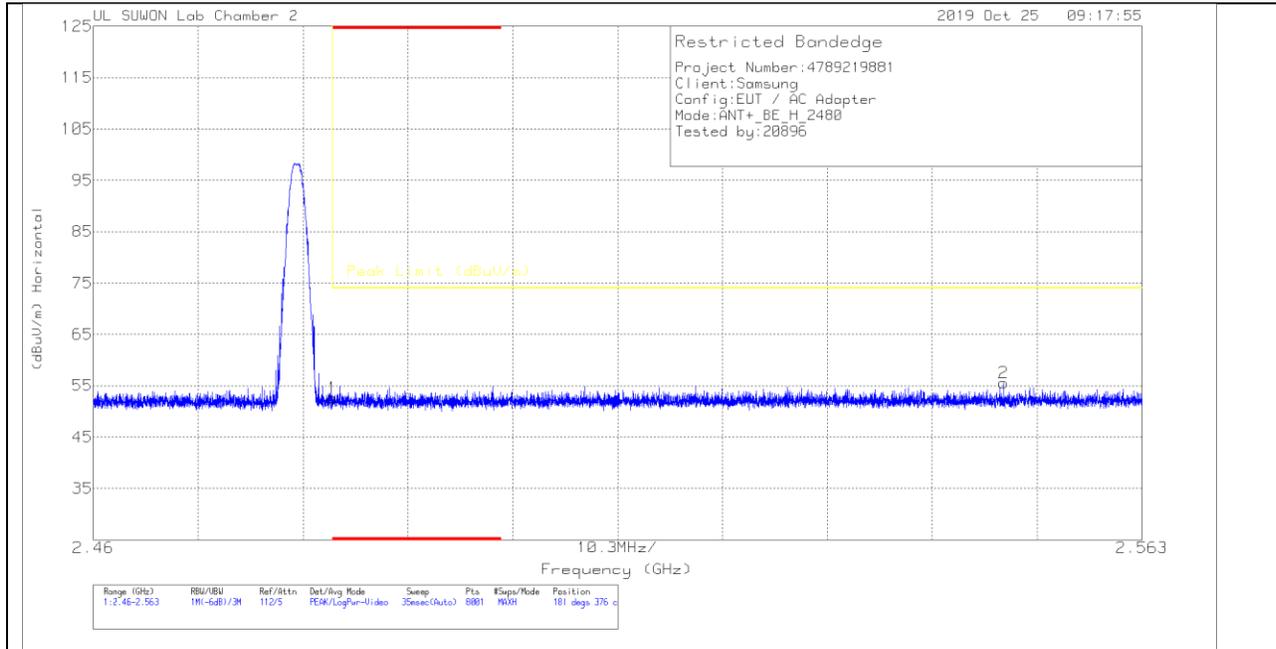

### HORIZONTAL DATA

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.13	Pk	31.9	-20.4	52.63	74	-21.37	181	376	H
2	2.54942	44.06	Pk	32	-20.5	55.56	74	-18.44	181	376	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

\* For marker 1 used the following method to do averaging:

$$DCCF = -30.21 \quad / \quad \text{Peak Reading} = \underline{52.63} \text{ dBuV/m}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 52.63 + -30.21 = \underline{22.42} \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin } \underline{31.58} \text{ dB}$$


\* For marker 2 used the following method to do averaging:

$$DCCF = -30.21 \quad / \quad \text{Peak Reading} = \underline{55.56} \text{ dBuV/m}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 55.56 + -30.21 = \underline{25.35} \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin } \underline{28.65} \text{ dB}$$

**VERTICAL PEAK AND AVERAGE PLOT**

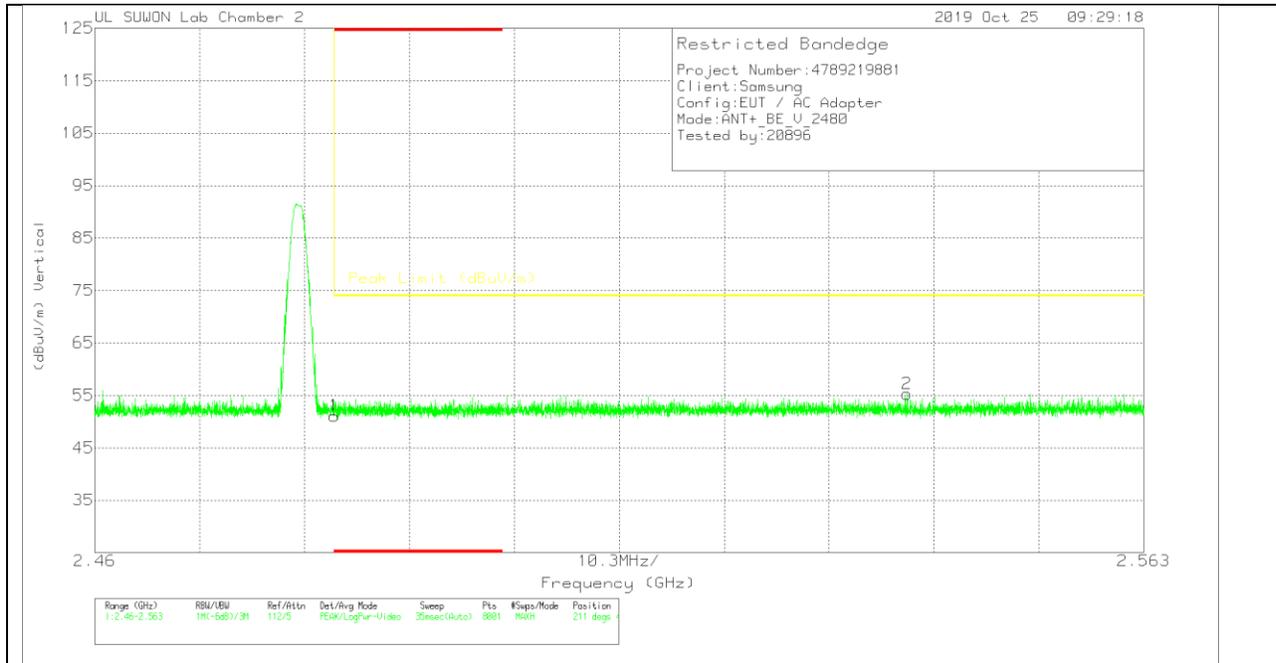

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	39.6	Pk	31.9	-20.4	51.1	74	-22.9	211	400	V
2	2.53973	43.8	Pk	32	-20.5	55.3	74	-18.7	211	400	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

\* For marker 1 used the following method to do averaging:

DCCF = -30.21 / Peak Reading = 51.1 dBuV/m

Corrected AV reading = Peak Reading + DCCF

= 51.1 + -30.21 = 20.89 dBuV/m AVG Limit : 54 dBuV/m, Margin 33.11 dB]

\* For marker 2 used the following method to do averaging:


DCCF = -30.21 / Peak Reading = 55.3 dBuV/m

Corrected AV reading = Peak Reading + DCCF


= 55.3 + -30.21 = 25.09 dBuV/m AVG Limit : 54 dBuV/m, Margin 28.91 dB]

### 7.2.3. HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

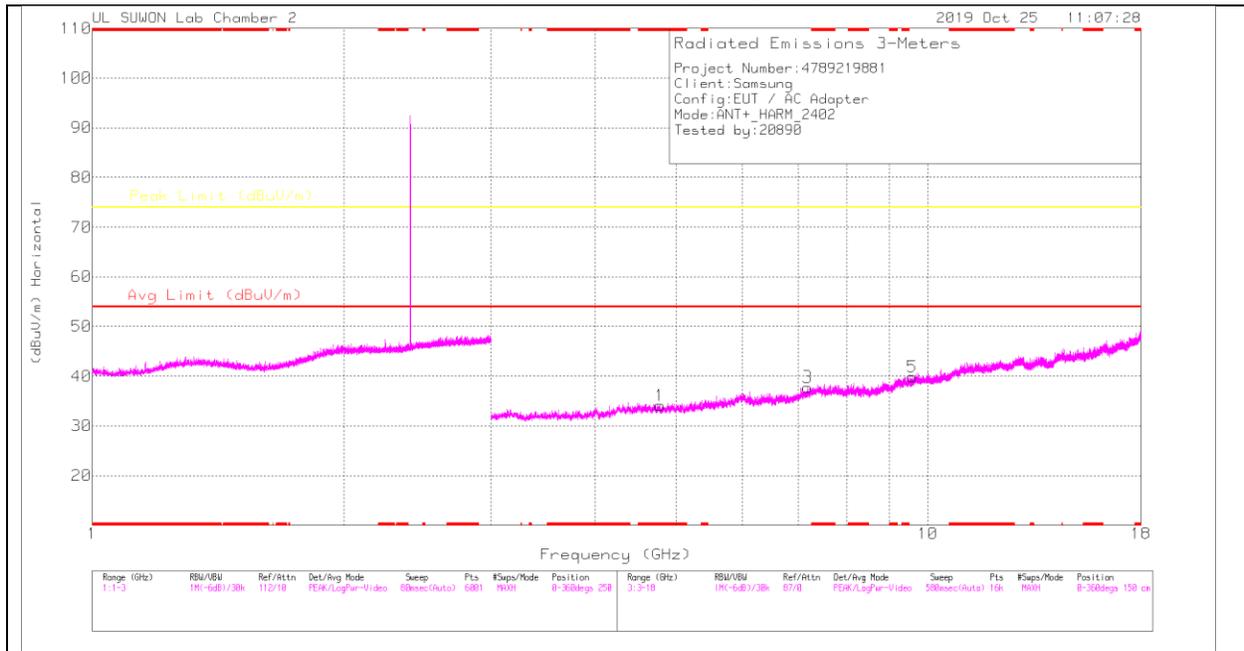

#### LOW CHANNEL VERTICAL

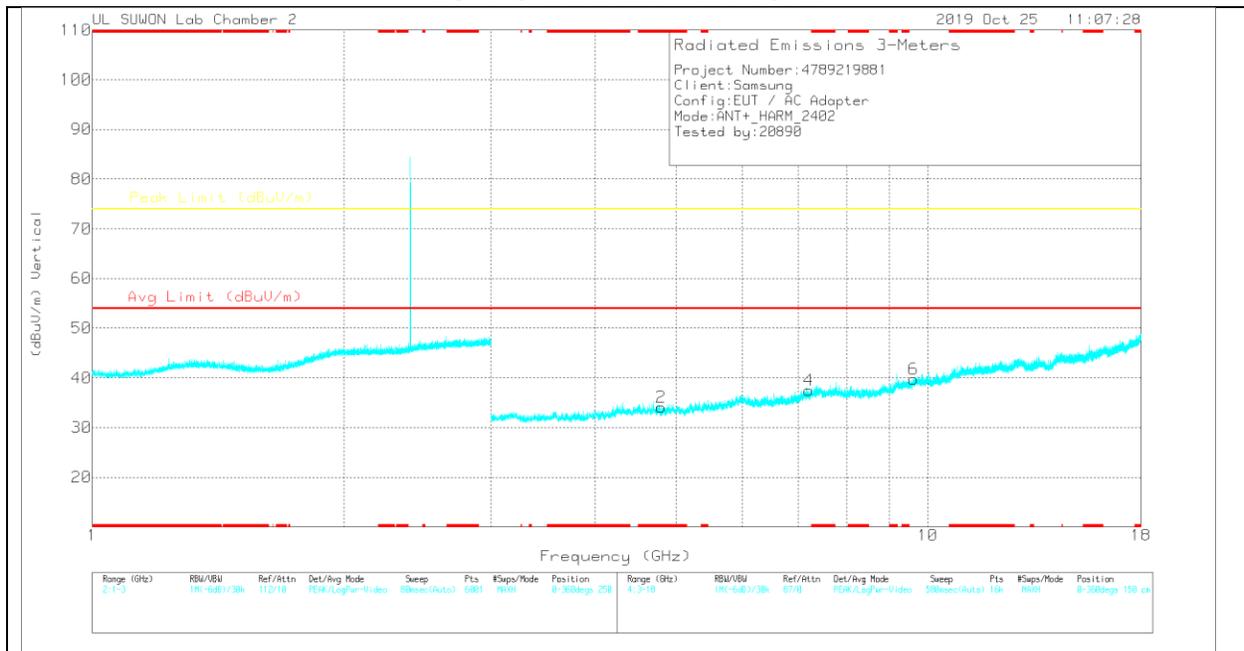

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.78263	36.04	PK2	34	-27.8	42.24	-	-	74	-31.76	360	100	H
* 4.78229	36.61	PK2	34	-27.8	42.81	-	-	74	-31.19	360	100	V
7.17676	34.89	PK2	36.1	-24.9	46.09	-	-	74	-27.91	360	100	H
7.17664	35.35	PK2	36.1	-24.9	46.55	-	-	74	-27.45	360	100	V
9.5819	32.54	PK2	37	-21.8	47.74	-	-	74	-26.26	360	100	H
9.58034	32.99	PK2	37	-21.8	48.19	-	-	74	-25.81	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### MID CHANNEL HORIZONTAL

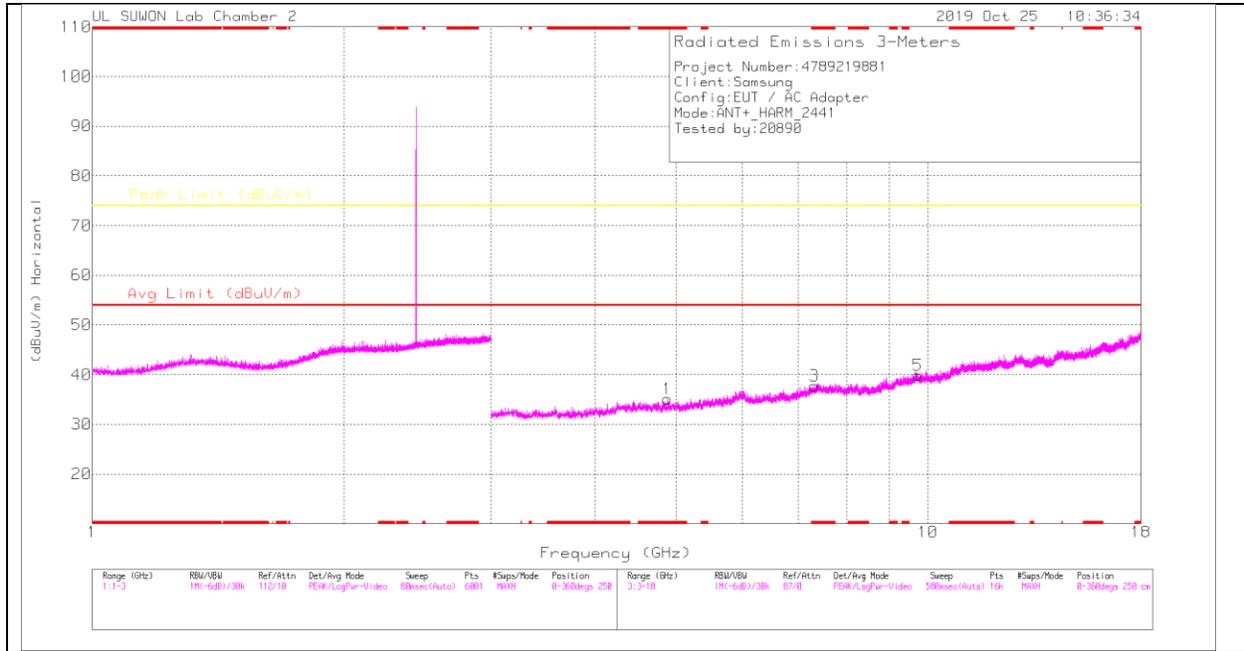

### MID CHANNEL VERTICAL

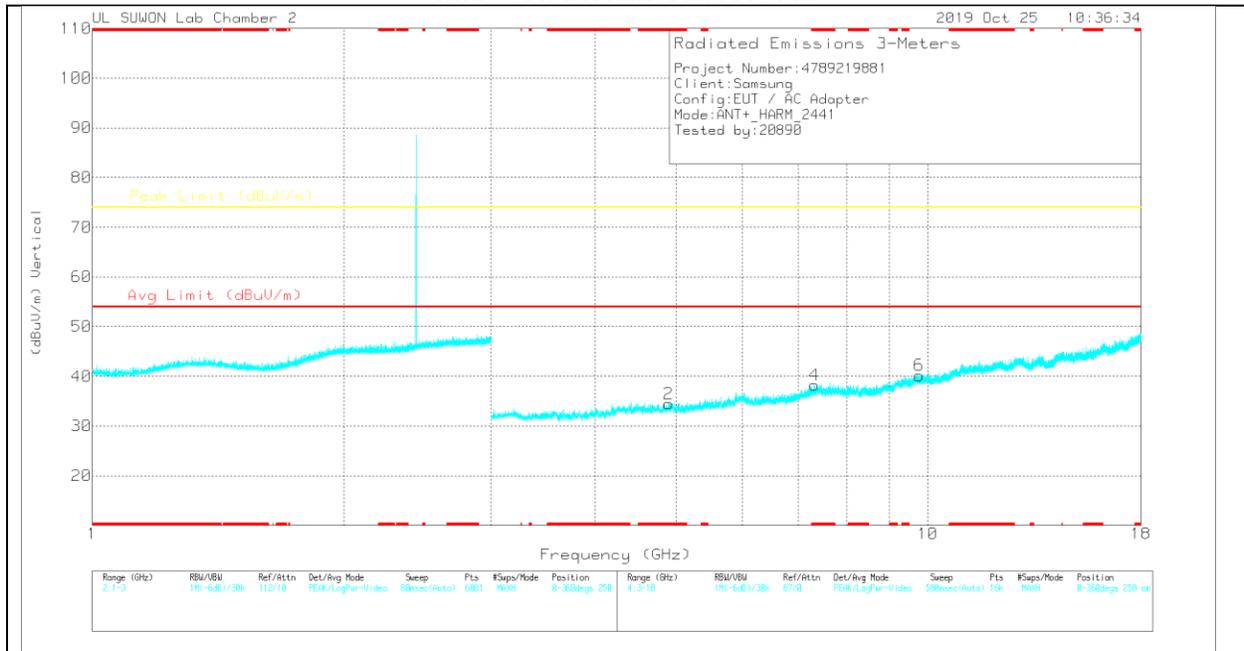

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL DATA

#### Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.87896	36.2	PK2	34	-27.8	42.4	-	-	74	-31.6	360	100	H
* 4.87929	36.42	PK2	34	-27.8	42.62	-	-	74	-31.38	360	100	V
* 7.31138	35.12	PK2	36.2	-24.8	46.52	-	-	74	-27.48	360	100	H
* 7.31066	35.12	PK2	36.2	-24.9	46.42	-	-	74	-27.58	360	100	V
9.73574	32.42	PK2	37.2	-21.2	48.42	-	-	74	-25.58	360	100	H
9.73871	32.52	PK2	37.2	-21.2	48.52	-	-	74	-25.48	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

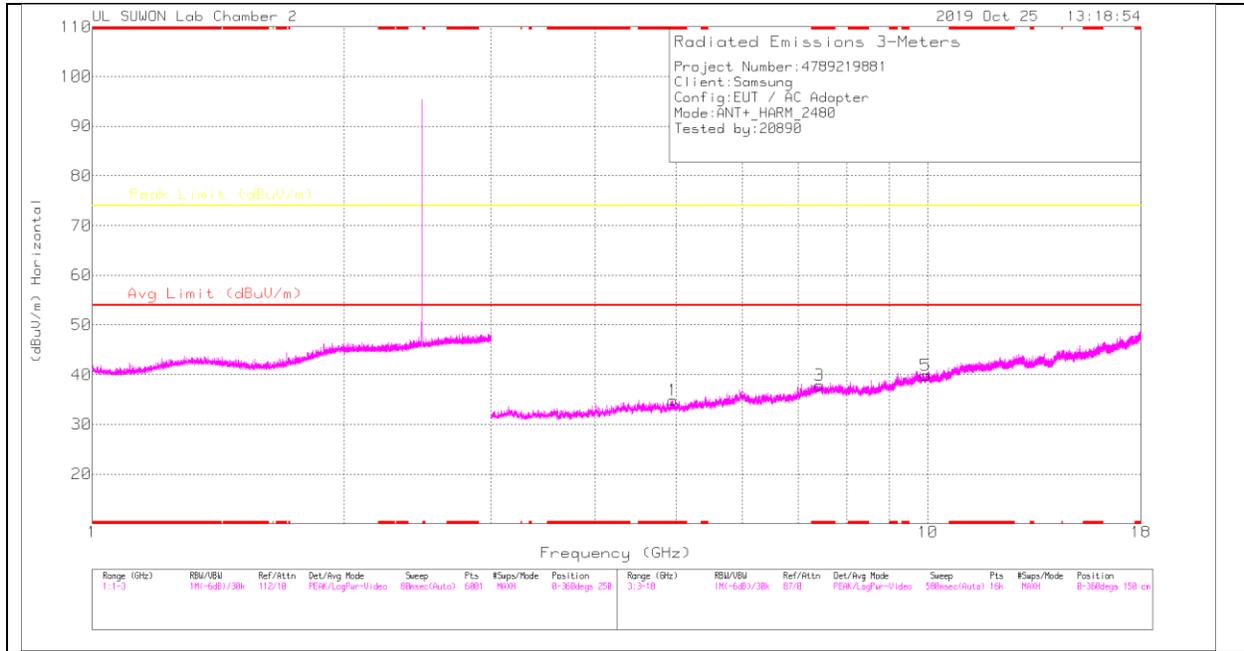

### HIGH CHANNEL VERTICAL

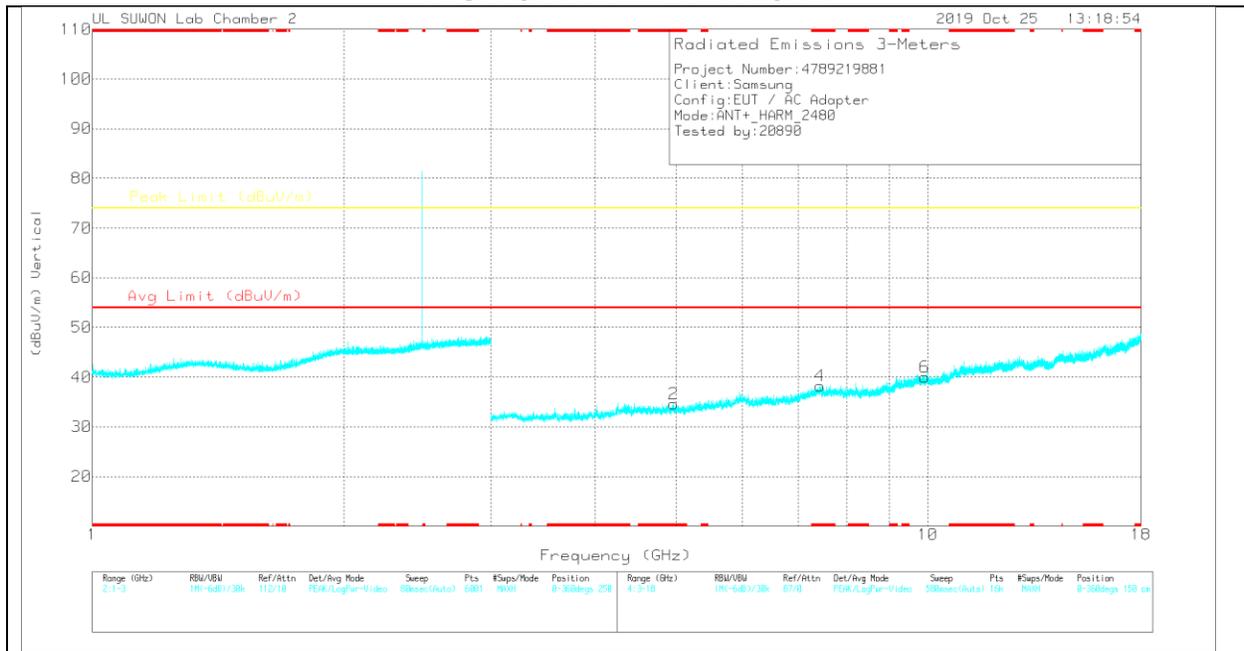

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95888	35.31	PK2	34.1	-27	42.41	-	-	74	-31.59	360	100	H
* 4.95663	36.2	PK2	34.1	-27	43.3	-	-	74	-30.7	360	100	V
* 7.41679	33.77	PK2	36.2	-23.9	46.07	-	-	74	-27.93	360	100	H
* 7.41696	34.06	PK2	36.2	-23.9	46.36	-	-	74	-27.64	360	100	V
9.94232	31.45	PK2	37.5	-20.6	48.35	-	-	74	-25.65	360	100	H
9.94384	31.22	PK2	37.5	-20.6	48.12	-	-	74	-25.88	360	100	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

## 7.2.4. SPURIOUS BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

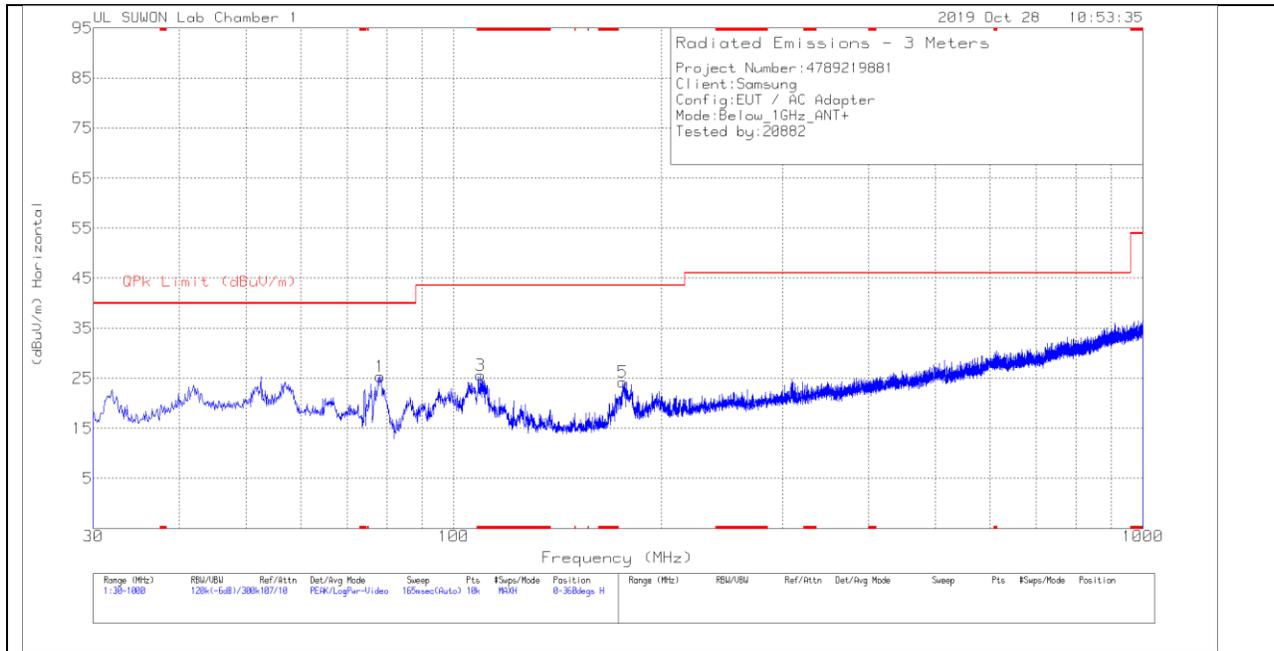

### SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

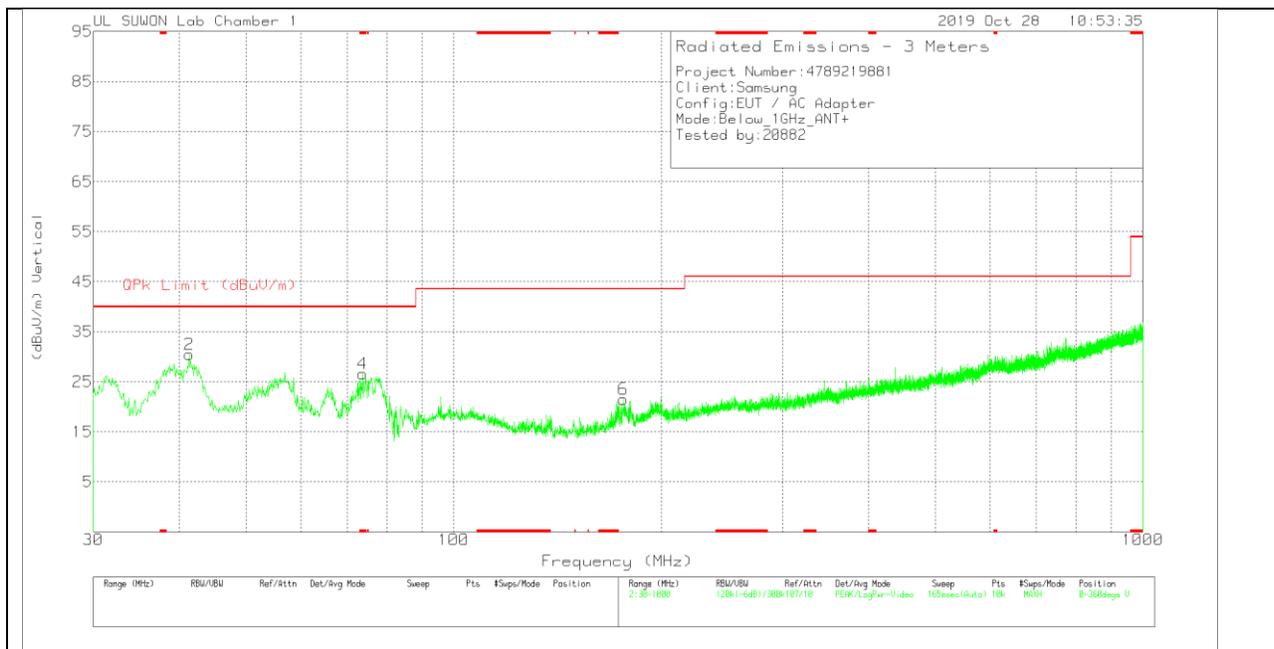

**BELOW 1 GHz TABLE**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	78.209	41.66	Pk	12.7	-29	25.36	40	-14.64	0-360	200	H
3	* 109.443	36.8	Pk	17.3	-28.5	25.6	43.52	-17.92	0-360	400	H
5	176.082	37	Pk	15.1	-27.8	24.3	43.52	-19.22	0-360	200	H
2	41.349	41.18	Pk	19	-29.7	30.48	40	-9.52	0-360	100	V
4	* 73.747	41.75	Pk	14	-29.1	26.65	40	-13.35	0-360	100	V
6	176.276	34.16	Pk	15.1	-27.7	21.56	43.52	-21.96	0-360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

## 8. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

**LINE 1 PLOT**

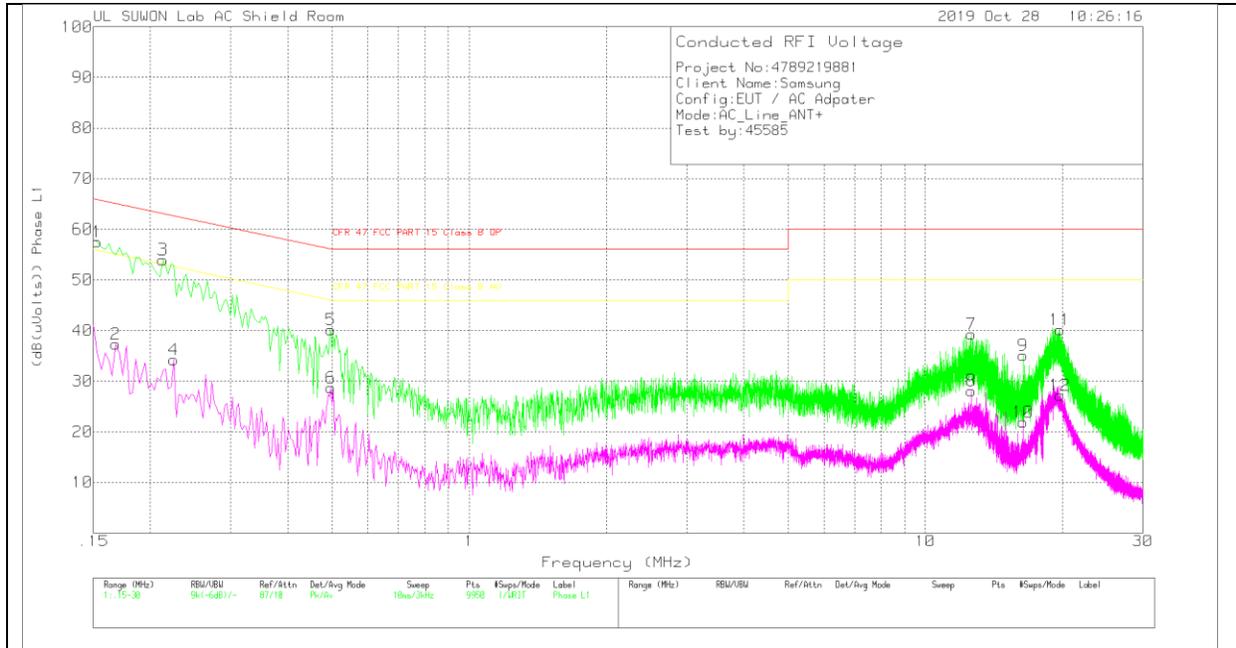

### LINE 1 RESULTS

#### Trace Markers

##### Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With Ex_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.153	47.58	Pk	9.8	.1	57.48	65.84	-8.36	-	-
2	.168	27.17	Av	10	.1	37.27	-	-	55.06	-17.79
3	.213	43.91	Pk	9.9	.2	54.01	63.09	-9.08	-	-
4	.225	24.19	Av	9.8	.2	34.19	-	-	52.63	-18.44
5	.498	30.09	Pk	9.9	.2	40.19	56.03	-15.84	-	-
6	.498	18.6	Av	9.9	.2	28.7	-	-	46.03	-17.33
7	12.627	28.99	Pk	10	.3	39.29	60	-20.71	-	-
8	12.618	17.83	Av	10	.3	28.13	-	-	50	-21.87
9	16.395	24.44	Pk	10.2	.4	35.04	60	-24.96	-	-
10	16.395	11.33	Av	10.2	.4	21.93	-	-	50	-28.07
11	19.737	29.47	Pk	10.3	.4	40.17	60	-19.83	-	-
12	19.713	16.55	Av	10.3	.4	27.25	-	-	50	-22.75

Pk - Peak detector

Av - Average detection


#### Quasi-Peak Emissions

##### Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With Ex_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15315	44.88	Qp	9.8	.1	54.78	65.83	-11.05	-	-
.16815	42.5	Qp	10	.1	52.6	65.05	-12.45	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

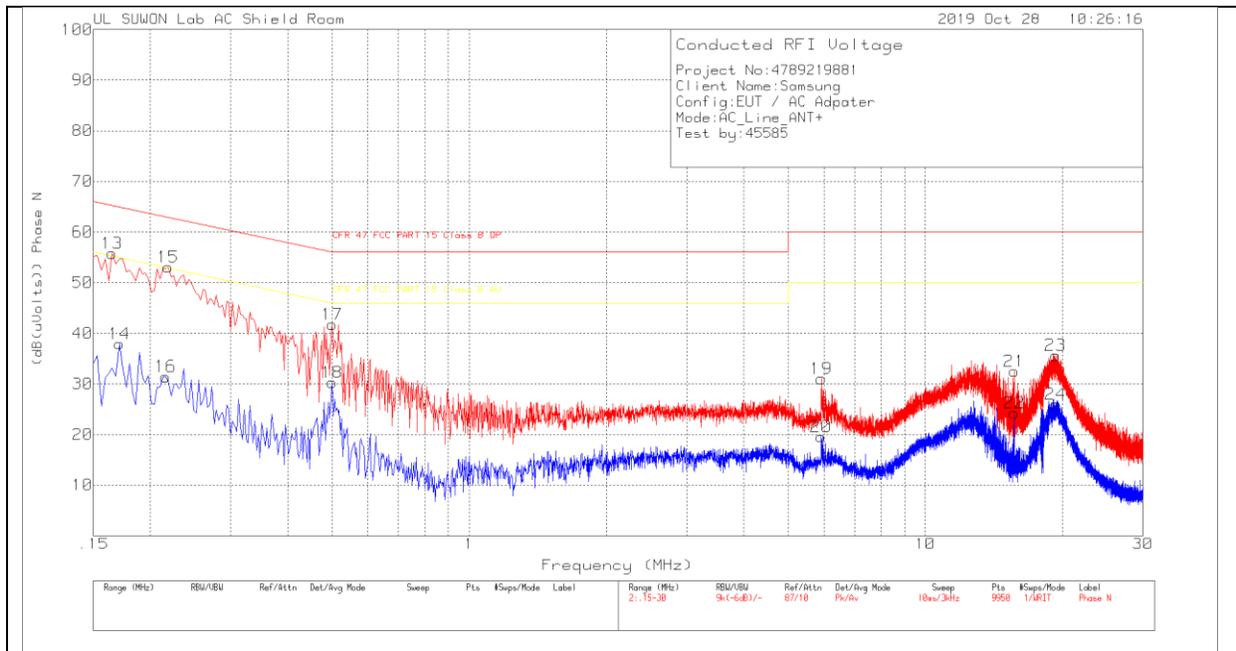

**LINE 2 RESULTS**

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.165	45.69	Pk	10	.1	55.79	65.21	-9.42	-	-
14	.171	27.66	Av	10.1	.2	37.96	-	-	54.91	-16.95
15	.219	43.1	Pk	9.8	.2	53.1	62.86	-9.76	-	-
16	.216	21.46	Av	9.8	.2	31.46	-	-	52.97	-21.51
17	.501	31.62	Pk	9.9	.2	41.72	56	-14.28	-	-
18	.501	20.14	Av	9.9	.2	30.24	-	-	46	-15.76
19	5.919	20.93	Pk	9.8	.3	31.03	60	-28.97	-	-
20	5.913	9.47	Av	9.8	.3	19.57	-	-	50	-30.43
21	15.66	21.92	Pk	10.2	.4	32.52	60	-27.48	-	-
22	15.66	13.64	Av	10.2	.4	24.24	-	-	50	-25.76
23	19.296	24.95	Pk	10.3	.4	35.65	60	-24.35	-	-
24	19.284	15.23	Av	10.3	.4	25.93	-	-	50	-24.07

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.16515	40.74	Qp	10	.1	50.84	65.2	-14.36	-	-
.17175	43.58	Qp	10.1	.2	53.88	64.88	-11	-	-

Qp - Quasi-Peak detector

**END OF REPORT**