



MEASUREMENT REPORT FCC PART 15.247 WLAN

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea


Date of Testing:
4/29 - 8/12/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2004140062-06.A3L

| | |
|-------------------|--------------------------------------|
| FCC ID: | A3LSMH204V |
| APPLICANT: | Samsung Electronics Co., Ltd. |

| | |
|----------------------------|---|
| Application Type: | Certification |
| Model: | SM-H204V |
| EUT Type: | Indoor Customer Premises Equipment (CPE) |
| Frequency Range: | 2412 – 2462MHz |
| Modulation Type: | CCK/DSSS/OFDM |
| FCC Classification: | Digital Transmission System (DTS) |
| FCC Rule Part(s): | Part 15 Subpart C (15.247) |
| Test Procedure(s): | ANSI C63.10-2013, KDB 558074 D01 v05r02, KDB 662911 D01 v02r01 |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




| | | | |
|---|--|---|--|
| FCC ID: A3LSMH204V |  MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 1 of 118 |


TABLE OF CONTENTS

| | | |
|-------|---|-----|
| 1.0 | INTRODUCTION..... | 4 |
| 1.1 | Scope | 4 |
| 1.2 | PCTEST Test Location..... | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Test Configuration | 7 |
| 2.4 | Antenna Description | 8 |
| 2.5 | Software and Firmware | 8 |
| 2.6 | EMI Suppression Device(s)/Modifications | 8 |
| 3.0 | DESCRIPTION OF TESTS | 9 |
| 3.1 | Evaluation Procedure | 9 |
| 3.2 | AC Line Conducted Emissions | 9 |
| 3.3 | Radiated Emissions..... | 10 |
| 3.4 | Environmental Conditions..... | 10 |
| 4.0 | ANTENNA REQUIREMENTS | 11 |
| 5.0 | MEASUREMENT UNCERTAINTY..... | 12 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 13 |
| 7.0 | TEST RESULTS..... | 14 |
| 7.1 | Summary | 14 |
| 7.2 | 6dB Bandwidth Measurement | 15 |
| 7.3 | Output Power Measurement..... | 44 |
| 7.4 | Power Spectral Density | 48 |
| 7.5 | Conducted Emissions at the Band Edge | 75 |
| 7.6 | Conducted Spurious Emissions..... | 92 |
| 7.7 | Radiated Spurious Emission Measurements – Above 1 GHz..... | 100 |
| 7.7.1 | MIMO/CDD Radiated Spurious Emission Measurements..... | 103 |
| 7.7.2 | MIMO Radiated Restricted Band Edge Measurements | 109 |
| 7.8 | Radiated Spurious Emissions Measurements – Below 1GHz | 111 |
| 7.9 | Line-Conducted Test Data..... | 115 |
| 8.0 | CONCLUSION | 118 |

| | | | |
|--|--|---|--|
| FCC ID: A3LSMH204V |  MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 2 of 118 |



MEASUREMENT REPORT



| Mode | Bandwidth (MHz) | Tx Frequency (MHz) | MIMO/CDD | | | |
|----------|-----------------|--------------------|-----------------|------------------|-----------------|------------------|
| | | | Avg Conducted | | Peak Conducted | |
| | | | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11b | 20 | 2412 - 2462 | 273.527 | 24.37 | 506.991 | 27.05 |
| 802.11g | 20 | 2412 - 2462 | 210.863 | 23.24 | 952.796 | 29.79 |
| 802.11n | 20 | 2412 - 2462 | 214.783 | 23.32 | 966.051 | 29.85 |
| 802.11ac | 20 | 2412 - 2462 | 217.270 | 23.37 | 959.401 | 29.82 |
| 802.11ax | 20 | 2412 - 2462 | 194.984 | 22.90 | 952.796 | 29.79 |
| 802.11n | 40 | 2422 - 2452 | 219.786 | 23.42 | 924.698 | 29.66 |
| 802.11ac | 40 | 2422 - 2452 | 218.273 | 23.39 | 963.829 | 29.84 |
| 802.11ax | 40 | 2422 - 2452 | 211.349 | 23.25 | 924.698 | 29.66 |

EUT Overview

| | | | | |
|--|---|--|---|--|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 3 of 118 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 4 of 118 | |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Indoor Customer Premises Equipment (CPE) FCC ID: A3LSMH204V**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 18425, 16452 ,17898, 23250

2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 5G NR (n5, n66, n2, n261, n260), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (LE)

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1 | 2412 | 7 | 2442 |
| 2 | 2417 | 8 | 2447 |
| 3 | 2422 | 9 | 2452 |
| 4 | 2427 | 10 | 2457 |
| 5 | 2432 | 11 | 2462 |
| 6 | 2437 | | |

Table 2-1. Frequency/ Channel Operations for 20MHz

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 3 | 2422 | 7 | 2442 |
| 4 | 2427 | 8 | 2447 |
| 5 | 2432 | 9 | 2452 |
| 6 | 2437 | | |

Table 2-2. Frequency/ Channel Operations for 40MHz

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 5 of 118 | |

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles | | |
|--------------------------------|----|----------------|
| 802.11 Mode/Band | | Duty Cycle [%] |
| | | MIMO |
| 2.4GHz | b | 90.01 |
| | g | 94.47 |
| | n | 95.93 |
| | ac | 95.25 |
| | ax | 95.60 |

Table 2-3. Measured Duty Cycles

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 6 of 118 | |

The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations | | CDD | SDM |
|---------------------|------|-----|-----|
| 2.4GHz | 11b | ✓ | ✗ |
| 2.4GHz | 11g | ✓ | ✓ |
| 2.4GHz | 11n | ✓ | ✓ |
| 2.4GHz | 11ac | ✓ | ✓ |
| 2.4GHz | 11ax | ✓ | ✓ |

Table 2-4. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

= Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Configuration 1: ANT1 and ANT2 transmitting in 2.4GHz mode and ANT3, ANT4, ANT5, ANT6 in 5GHz mode

| Description | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna | 1+2 | 3+4+5+6 |
| Channel | 6 | 100 |
| Operating Frequency (MHz) | 2437 | 5500 |
| Data Rate (Mbps) | 1Mbps | 6Mbps |
| Mode | b | a |

Table 2-5. Config-1 (ANT1+2 2.4GHz & ANT3+4+5+6 5GHz)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 7 of 118 | |

2.4 Antenna Description

Following antenna was used for the testing.

| Frequency [GHz] | Antenna Gain ANT1 [dBi] | Antenna Gain ANT2 [dBi] |
|-----------------|-------------------------|-------------------------|
| 2.4 | 2.7 | 0.4 |

Table 2-6. Antenna Peak Gain

2.5 Software and Firmware

The test was conducted with firmware version H204VVRE0ATG6 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | | |
|--|---|--|---|--|
| FCC ID: A3LSMH204V |  <small>Proud to be part of element</small> | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 8 of 118 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 9 of 118 |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 10 of 118 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

| | | | | |
|--|---|--|---|--|
| FCC ID: A3LSMH204V |  <small>Proud to be part of element</small> | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 11 of 118 |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Line Conducted Disturbance | 3.09 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | |
|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 12 of 118 |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|------------------|--------------------------------------|------------|--------------|------------|---------------|
| - | WL25-1 | Conducted Cable Set (25GHz) | 7/2/2020 | Annual | 7/2/2021 | WL25-1 |
| - | WL25-2 | Conducted Cable Set (25GHz) | 7/9/2020 | Annual | 7/9/2021 | WL25-2 |
| - | WL40-1 | Conducted Cable Set (40GHz) | 3/13/2020 | Annual | 3/13/2021 | WL40-1 |
| Anritsu | MA2411B | Pulse Power Sensor | 8/14/2019 | Annual | 8/14/2020 | 1315051 |
| Anritsu | MA2411B | Pulse Power Sensor | 10/15/2019 | Annual | 10/15/2020 | 1339026 |
| Anritsu | ML2495A | Power Meter | 1/15/2020 | Annual | 1/15/2021 | 1328004 |
| Anritsu | ML2496A | Power Meter | 11/6/2019 | Annual | 11/6/2020 | 1405003 |
| Com-Power | AL-130 | 9kHz - 30MHz Loop Antenna | 10/10/2019 | Biennial | 10/10/2021 | 121034 |
| Emco | 3116 | Horn Antenna (18 - 40GHz) | 8/7/2018 | Biennial | 8/7/2020 | 9203-2178 |
| Keysight Technologies | N9030A | PXA Signal Analyzer | 9/13/2019 | Annual | 9/13/2020 | MY54490576 |
| Pasternack | NMLC-2 | Line Conducted Emissions Cable (NM) | 1/9/2020 | Annual | 1/9/2021 | NMLC-2 |
| Rohde & Schwarz | ESU40 | EMI Test Receiver (40GHz) | 9/23/2019 | Annual | 9/23/2020 | 100348 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 2/10/2020 | Annual | 2/10/2021 | 102134 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 2/21/2020 | Annual | 2/21/2021 | 102133 |
| Rohde & Schwarz | TS-PR26 | 18-26.5 GHz Pre-Amplifier | 11/1/2019 | Annual | 11/1/2020 | 100040 |
| Solar Electronics | 8012-50-R-24-BNC | Line Impedance Stabilization Network | 10/1/2019 | Biennial | 10/1/2021 | 310233 |
| Sunol | DRH-118 | Horn Antenna (1-18GHz) | 10/3/2019 | Biennial | 10/3/2021 | A050307 |
| Sunol | DRH-118 | Horn Antenna (1-18 GHz) | 8/27/2019 | Biennial | 8/27/2021 | A042511 |

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 13 of 118 | |

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMH204V
 FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|---------------------|----------------|---|--|----------------|-------------|-------------------|
| 15.247(a)(2) | RSS-247 [5.2] | 6dB Bandwidth | > 500kHz | CONDUCTED | PASS | Section 7.2 |
| 15.247(b)(3) | RSS-247 [5.4] | Transmitter Output Power | < 1 Watt | | PASS | Sections 7.3 |
| 15.247(e) | RSS-247 [5.2] | Transmitter Power Spectral Density | < 8dBm / 3kHz Band | | PASS | Section 7.4 |
| 15.247(d) | RSS-247 [5.5] | Band Edge / Out-of-Band Emissions | ≥ 20dBc | | PASS | Sections 7.5, 7.6 |
| 15.205 15.209 | RSS-Gen [8.9] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | RADIATED | PASS | Sections 7.7, 7.8 |
| 15.207 | RSS-Gen [8.8] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 limits (RSS-Gen[8.8]) | LINE CONDUCTED | PASS | Section 7.9 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 14 of 118 | |

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None


| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 15 of 118 |

Antenna-1 6 dB Bandwidth Measurements


| Frequency [MHz] | Bandwidth [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412 | 20 | 1 | b | 1 | 8.091 | 0.500 |
| 2437 | 20 | 6 | b | 1 | 8.077 | 0.500 |
| 2462 | 20 | 11 | b | 1 | 8.081 | 0.500 |
| 2412 | 20 | 1 | g | 6 | 16.35 | 0.500 |
| 2437 | 20 | 6 | g | 6 | 16.31 | 0.500 |
| 2462 | 20 | 11 | g | 6 | 16.07 | 0.500 |
| 2412 | 20 | 1 | n | 6.5/7.2 (MCS0) | 17.63 | 0.500 |
| 2437 | 20 | 6 | n | 6.5/7.2 (MCS0) | 17.62 | 0.500 |
| 2462 | 20 | 11 | n | 6.5/7.2 (MCS0) | 17.62 | 0.500 |
| 2412 | 20 | 1 | ac | 6.5/7.2 (MCS0) | 17.56 | 0.500 |
| 2437 | 20 | 6 | ac | 6.5/7.2 (MCS0) | 17.41 | 0.500 |
| 2462 | 20 | 11 | ac | 6.5/7.2 (MCS0) | 17.31 | 0.500 |
| 2412 | 20 | 1 | ax | 6.5/7.2 (MCS0) | 18.94 | 0.500 |
| 2437 | 20 | 6 | ax | 6.5/7.2 (MCS0) | 18.91 | 0.500 |
| 2462 | 20 | 11 | ax | 6.5/7.2 (MCS0) | 18.97 | 0.500 |
| 2422 | 40 | 3 | n | 6.5/7.2 (MCS0) | 35.51 | 0.500 |
| 2437 | 40 | 6 | n | 6.5/7.2 (MCS0) | 35.47 | 0.500 |
| 2452 | 40 | 9 | n | 6.5/7.2 (MCS0) | 35.72 | 0.500 |
| 2422 | 40 | 3 | ac | 6.5/7.2 (MCS0) | 35.63 | 0.500 |
| 2437 | 40 | 6 | ac | 6.5/7.2 (MCS0) | 36.02 | 0.500 |
| 2452 | 40 | 9 | ac | 6.5/7.2 (MCS0) | 35.59 | 0.500 |
| 2422 | 40 | 3 | ax | 6.5/7.2 (MCS0) | 38.10 | 0.500 |
| 2437 | 40 | 6 | ax | 6.5/7.2 (MCS0) | 38.02 | 0.500 |
| 2452 | 40 | 9 | ax | 6.5/7.2 (MCS0) | 38.04 | 0.500 |

Table 7-2. Conducted Bandwidth Measurements ANT1

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 16 of 118 |

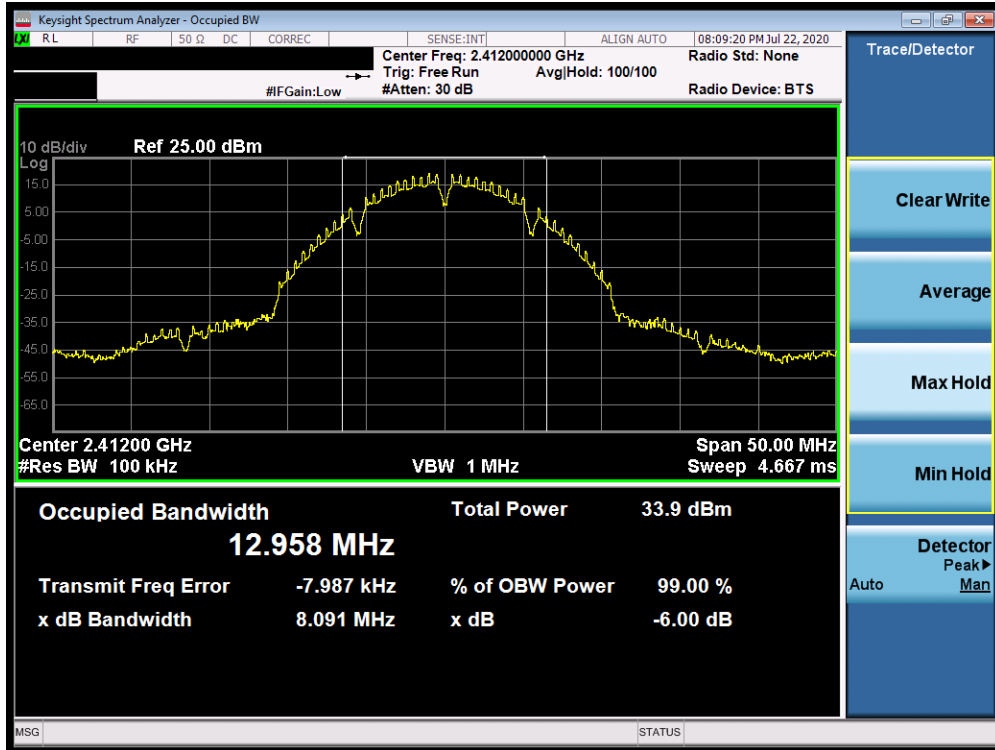


Plot 7-1. 6dB Bandwidth Plot ANT1 (802.11b – Ch. 1)

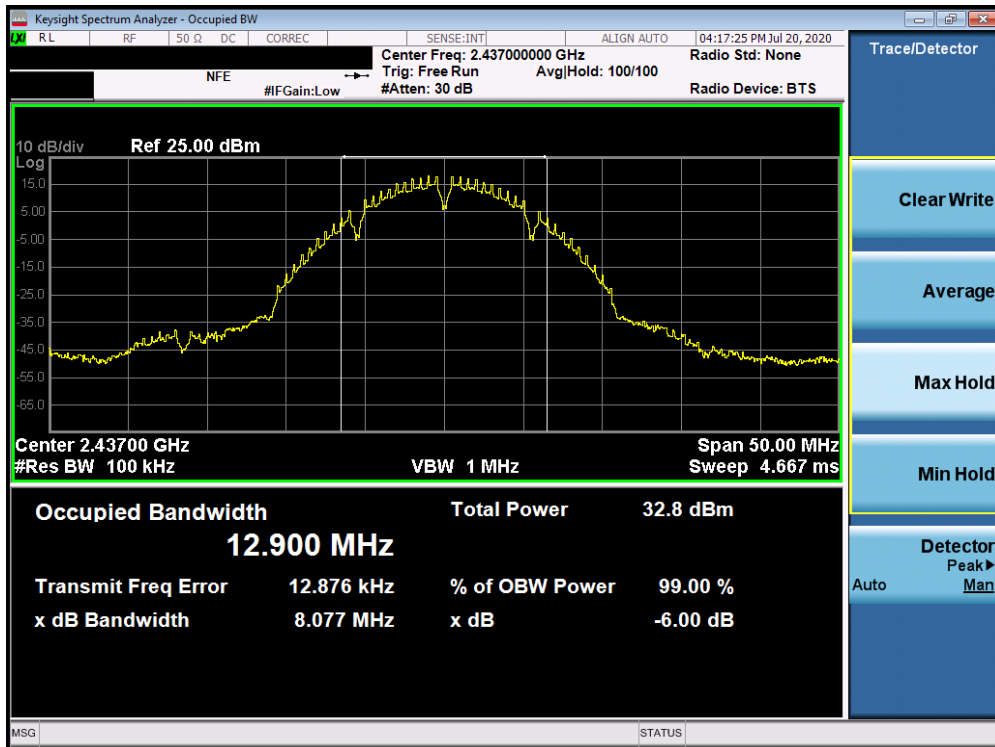


Plot 7-2. 6dB Bandwidth Plot ANT1 (802.11b – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 17 of 118 |

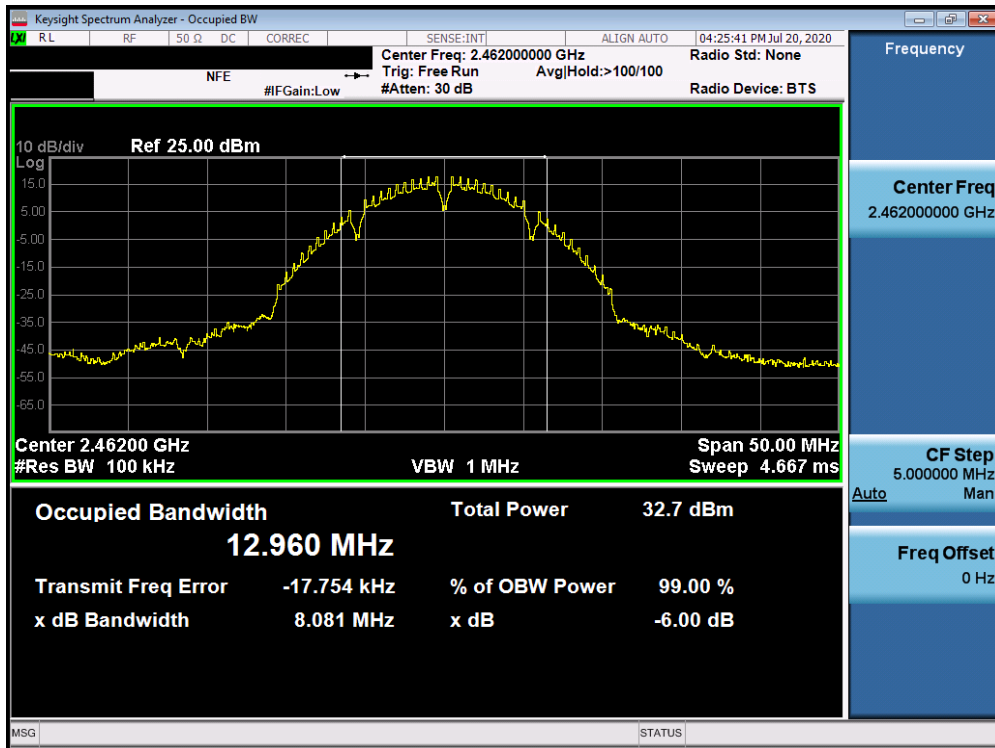


Plot 7-3. 6dB Bandwidth Plot ANT1 (802.11b – Ch. 11)

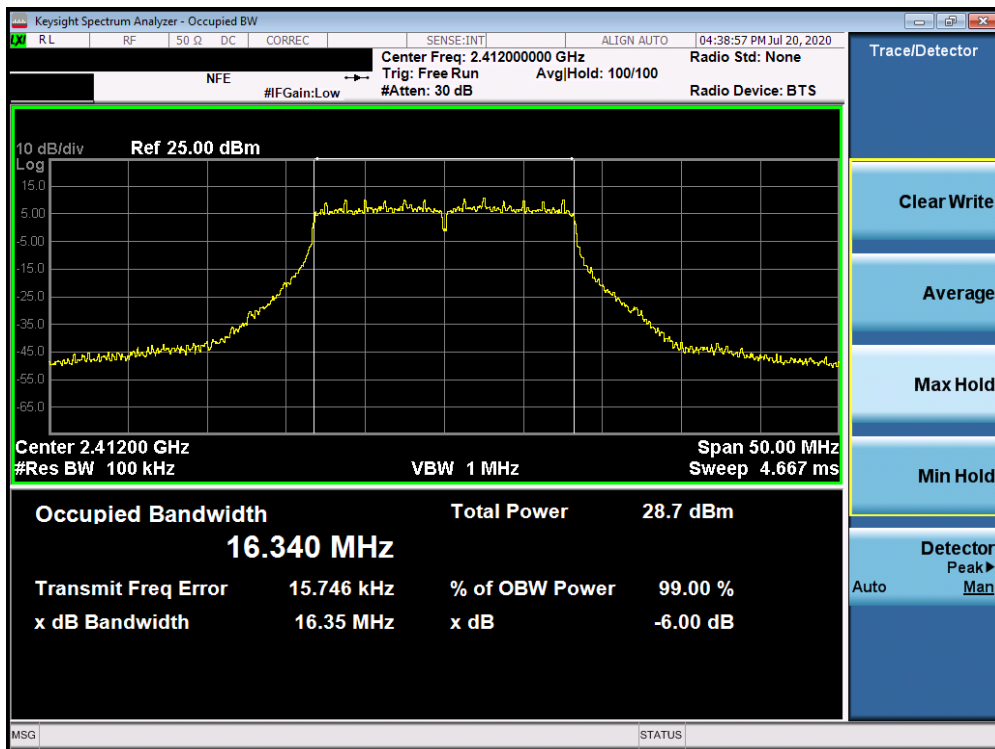


Plot 7-4. 6dB Bandwidth Plot ANT1 (802.11g – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 18 of 118 |

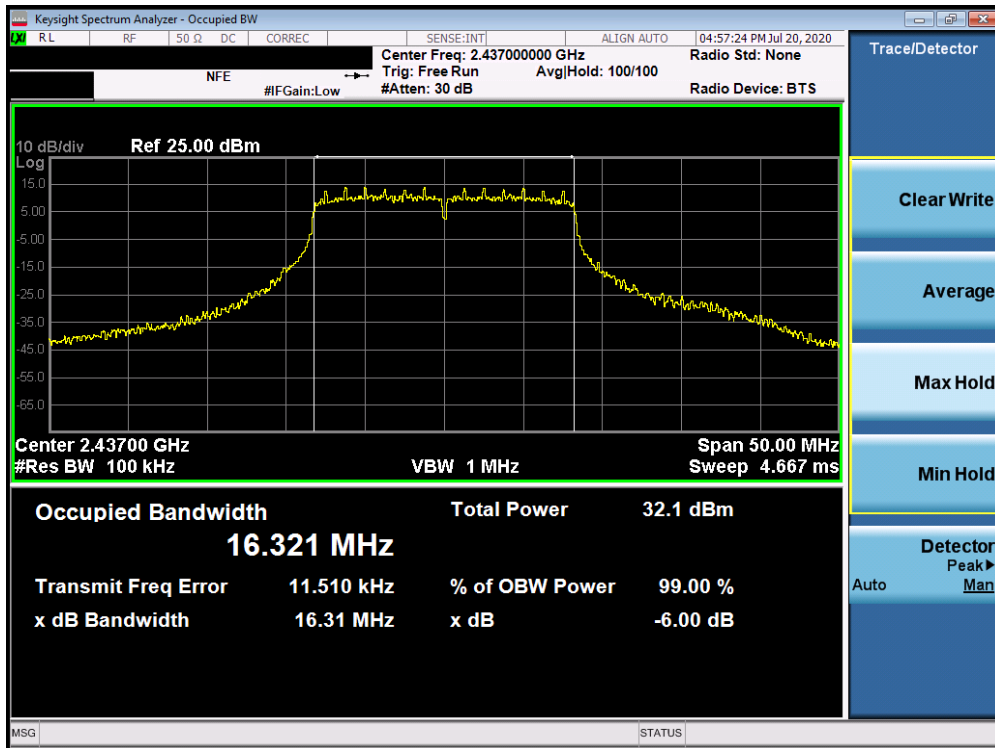


Plot 7-5. 6dB Bandwidth Plot ANT1 (802.11g – Ch. 6)

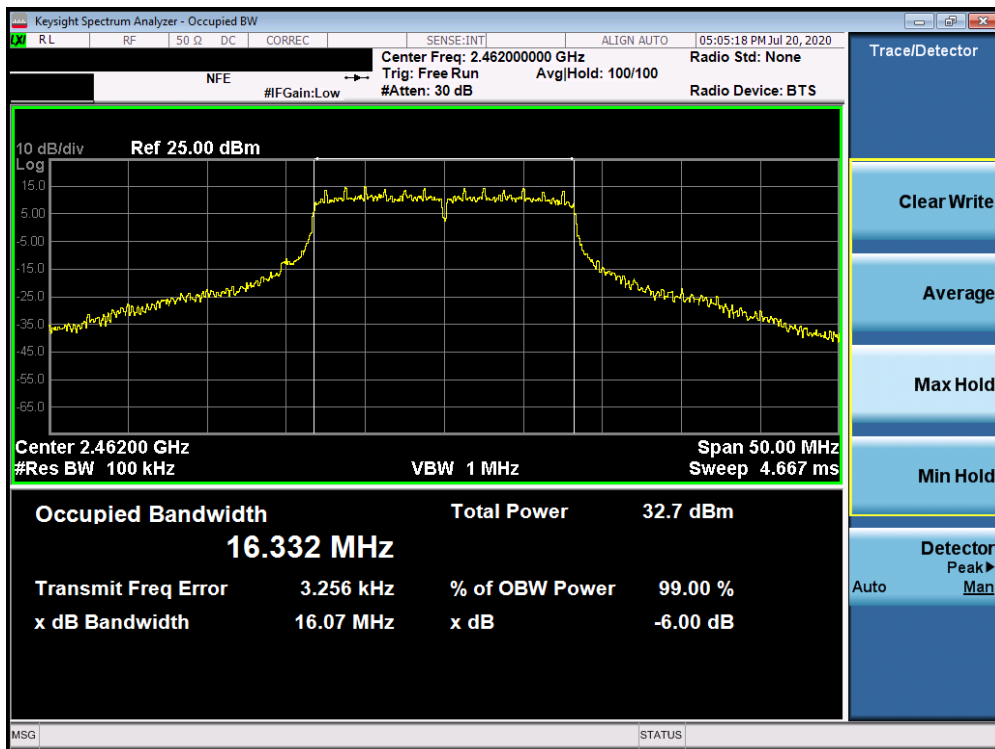


Plot 7-6. 6dB Bandwidth Plot ANT1 (802.11g – Ch. 11)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 19 of 118 |

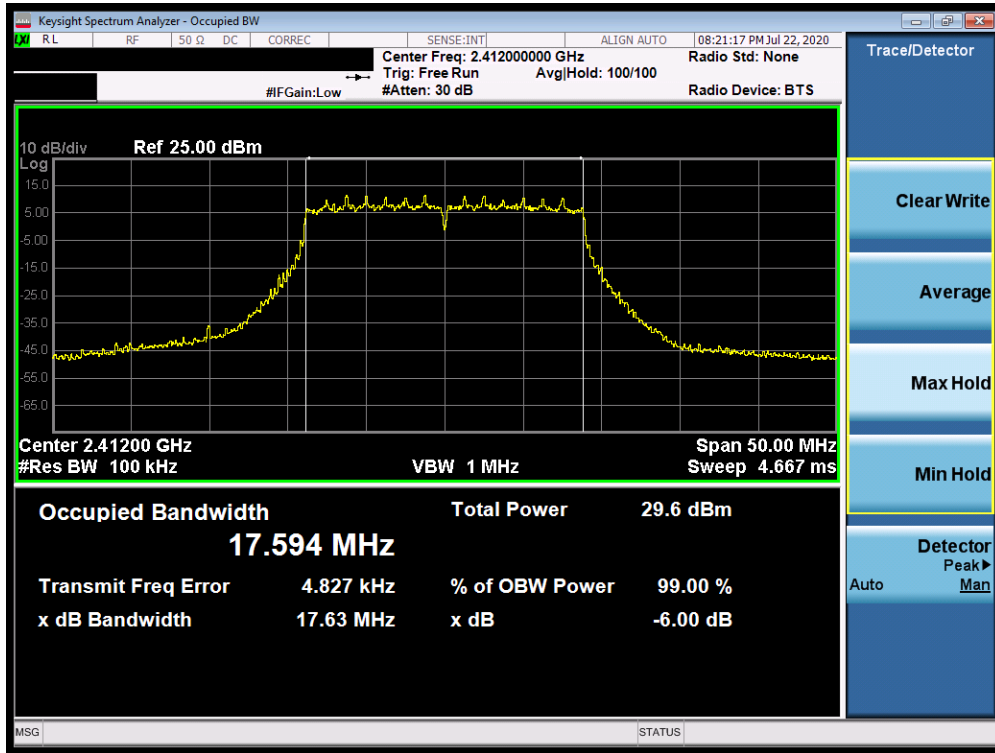


Plot 7-7. 6dB Bandwidth Plot ANT1 (802.11n (2.4GHz) – Ch. 1)

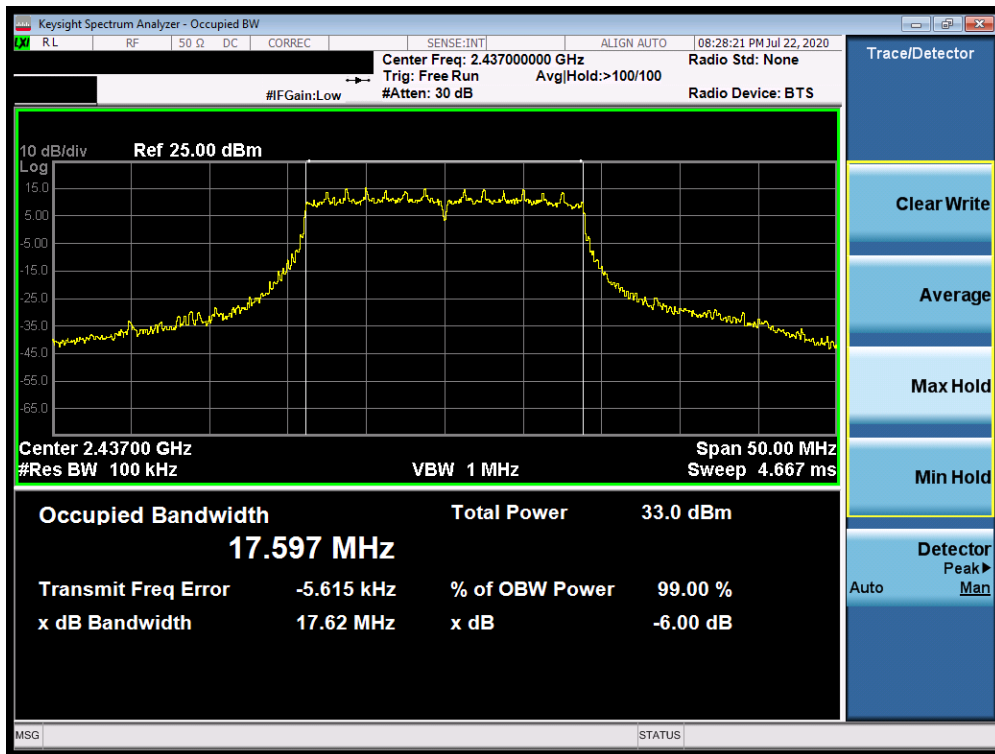


Plot 7-8. 6dB Bandwidth Plot ANT1 (802.11n (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 20 of 118 | |

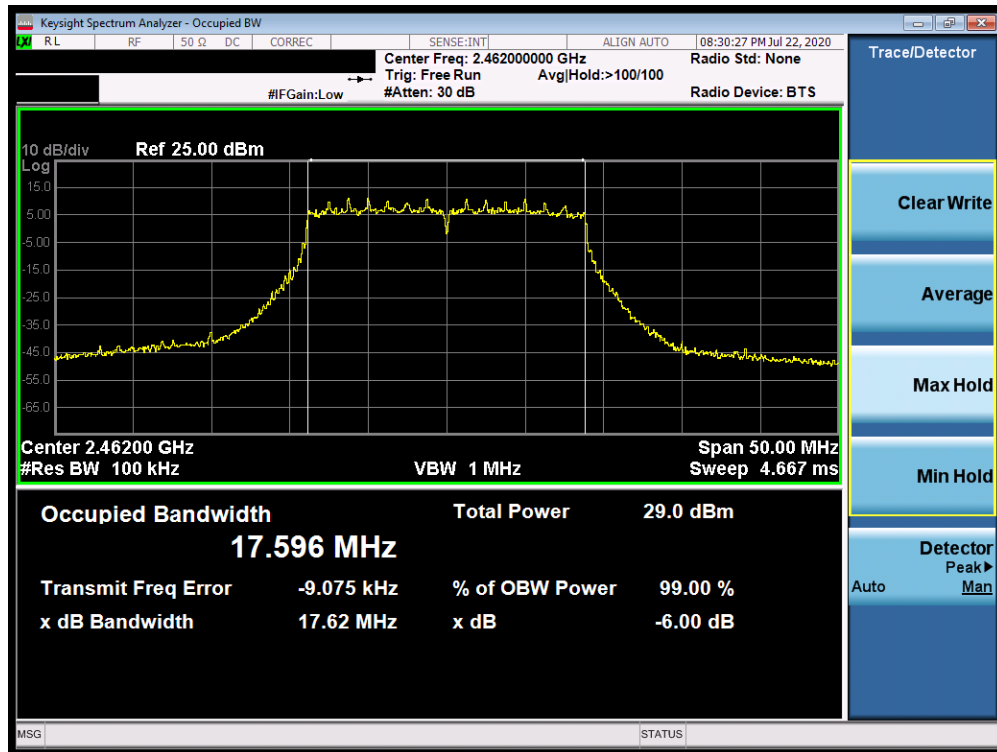


Plot 7-9. 6dB Bandwidth Plot ANT1 (802.11n (2.4GHz) – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 21 of 118 |

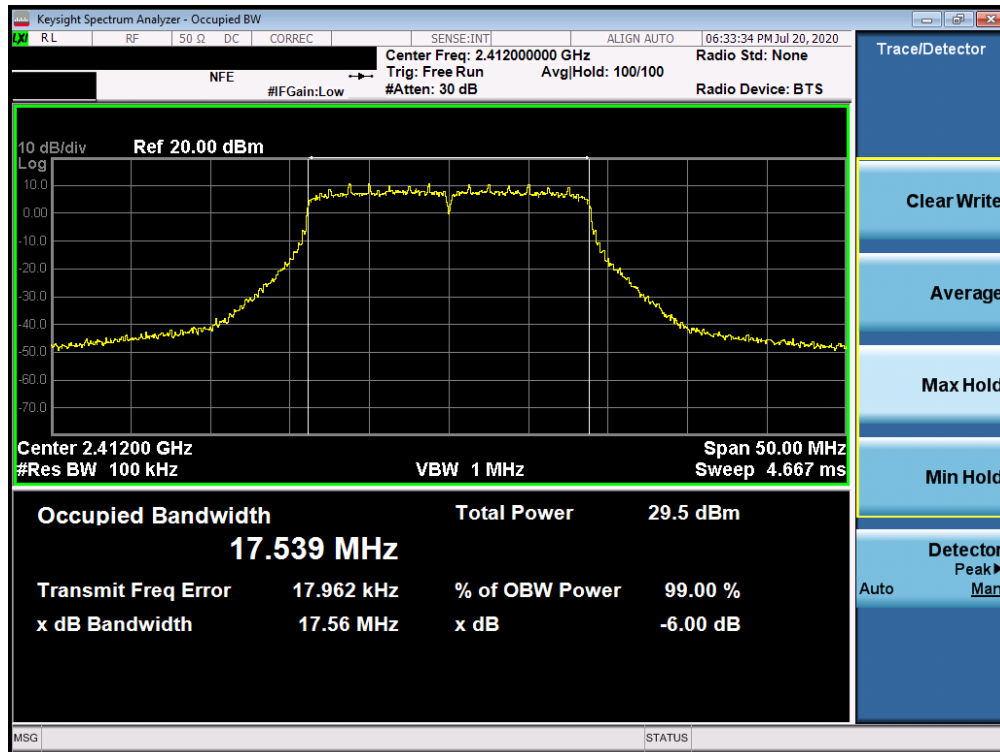


Plot 7-10. 6dB Bandwidth Plot ANT1 (802.11ac (2.4GHz) – Ch. 1)

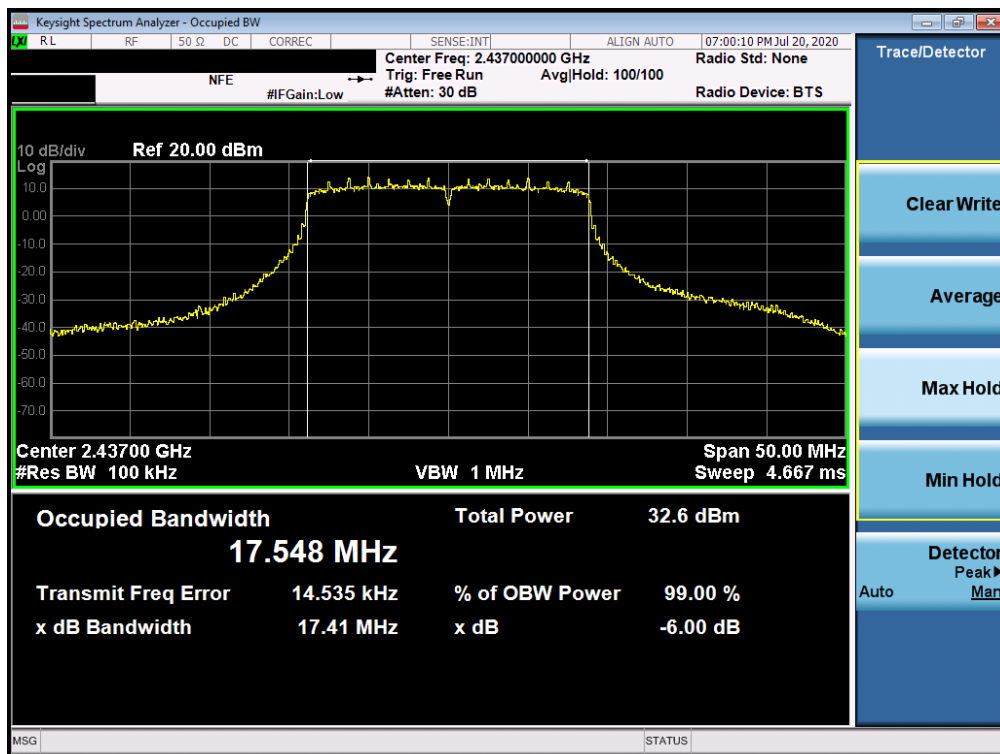


Plot 7-11. 6dB Bandwidth Plot ANT1 (802.11ac (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 22 of 118 |

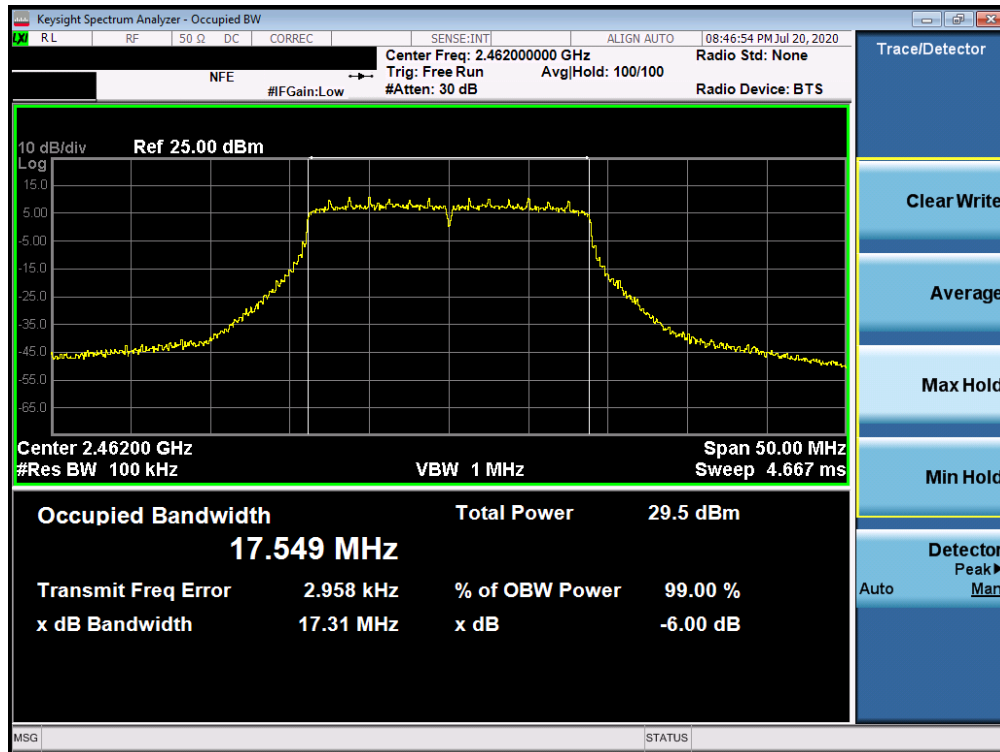


Plot 7-12. 6dB Bandwidth Plot ANT1 (802.11ac (2.4GHz) – Ch. 11)

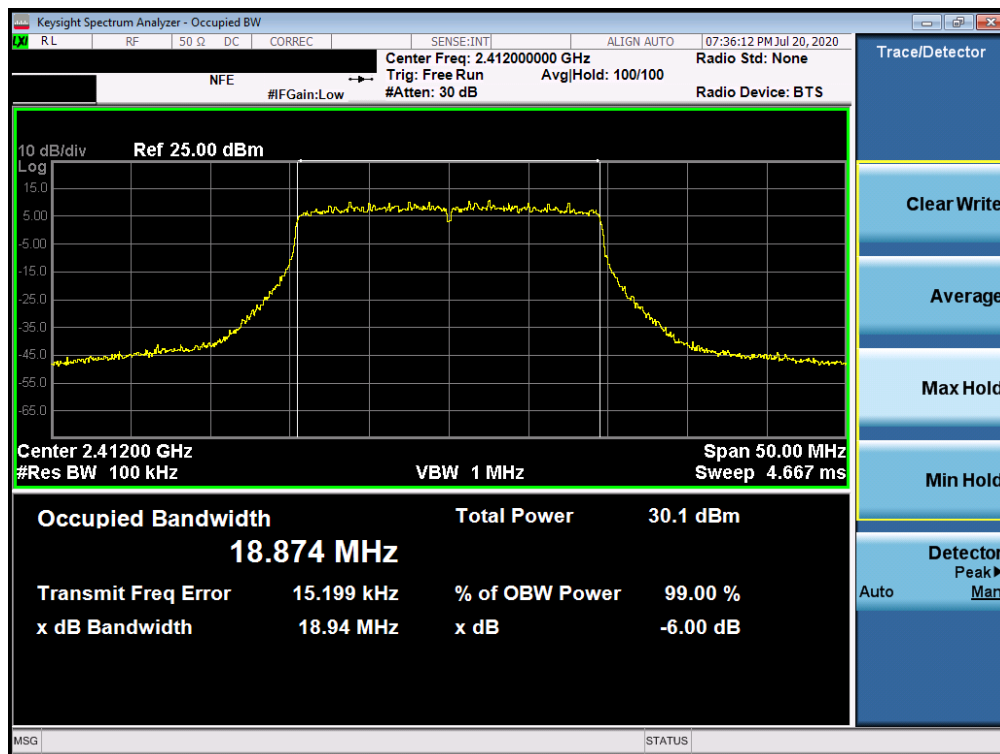


Plot 7-13. 6dB Bandwidth Plot ANT1 (802.11ax (2.4GHz) – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 23 of 118 | |

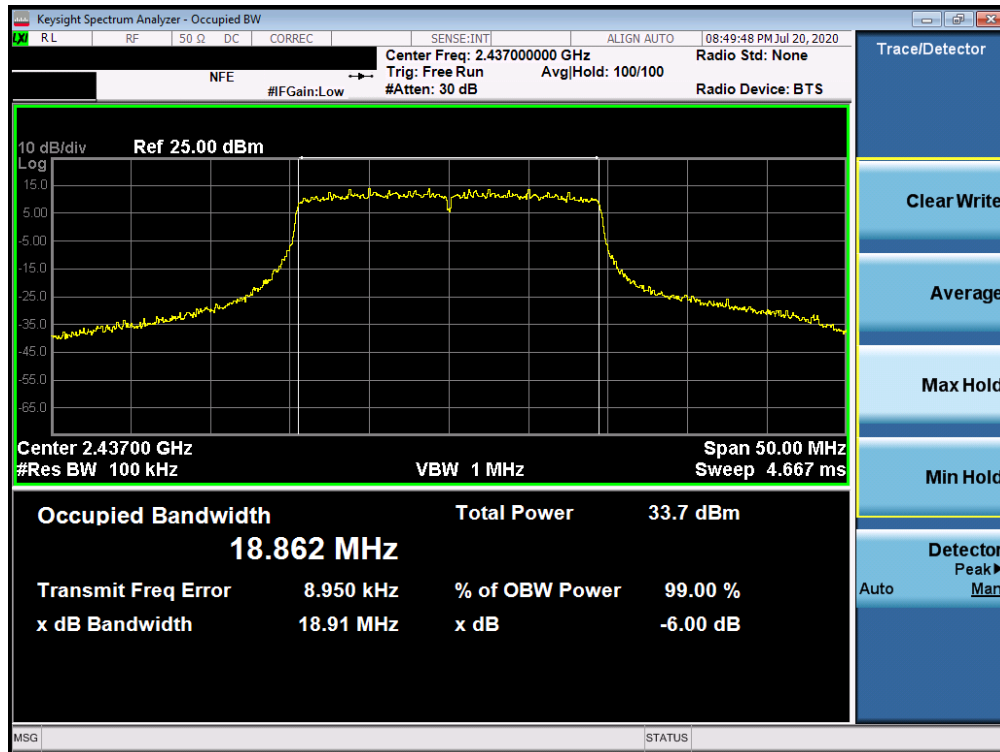


Plot 7-14. 6dB Bandwidth Plot ANT1 (802.11ax (2.4GHz) – Ch. 6)

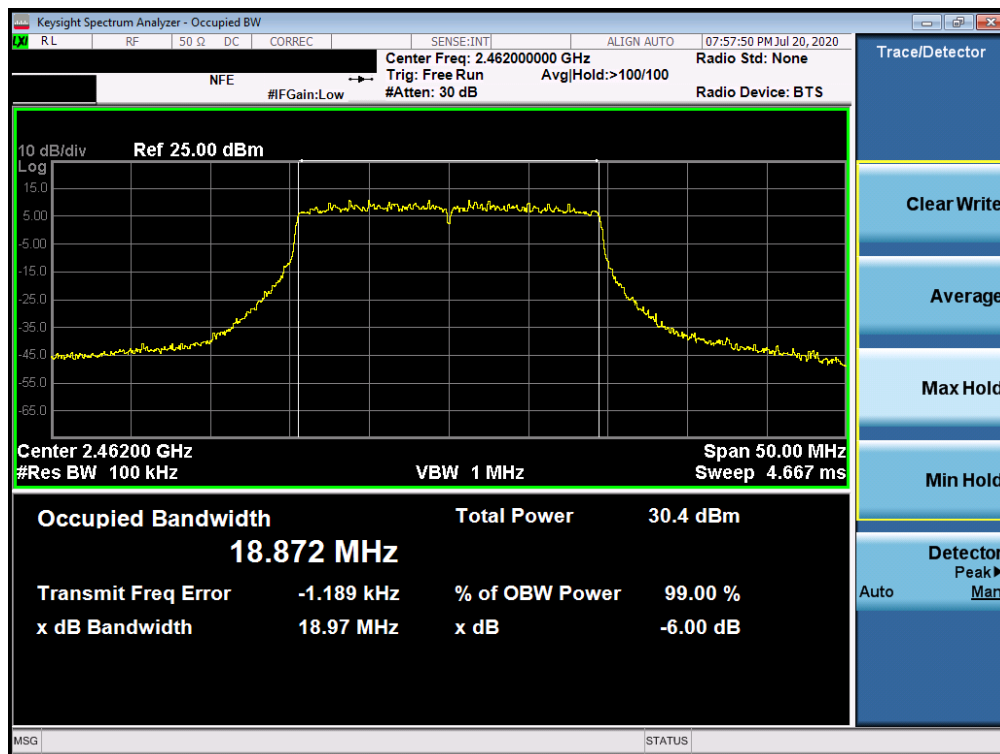


Plot 7-15. 6dB Bandwidth Plot ANT1 (802.11ax (2.4GHz) – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 24 of 118 |

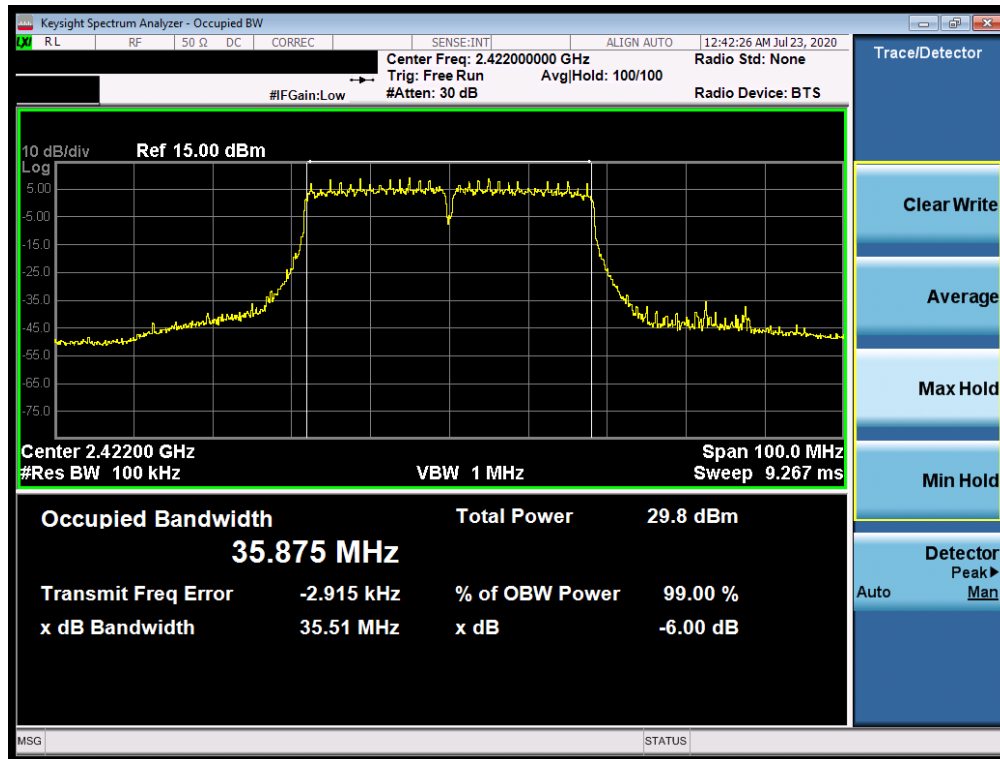


Plot 7-16. 6dB Bandwidth Plot ANT1 (802.11n (2.4GHz) – Ch. 3)

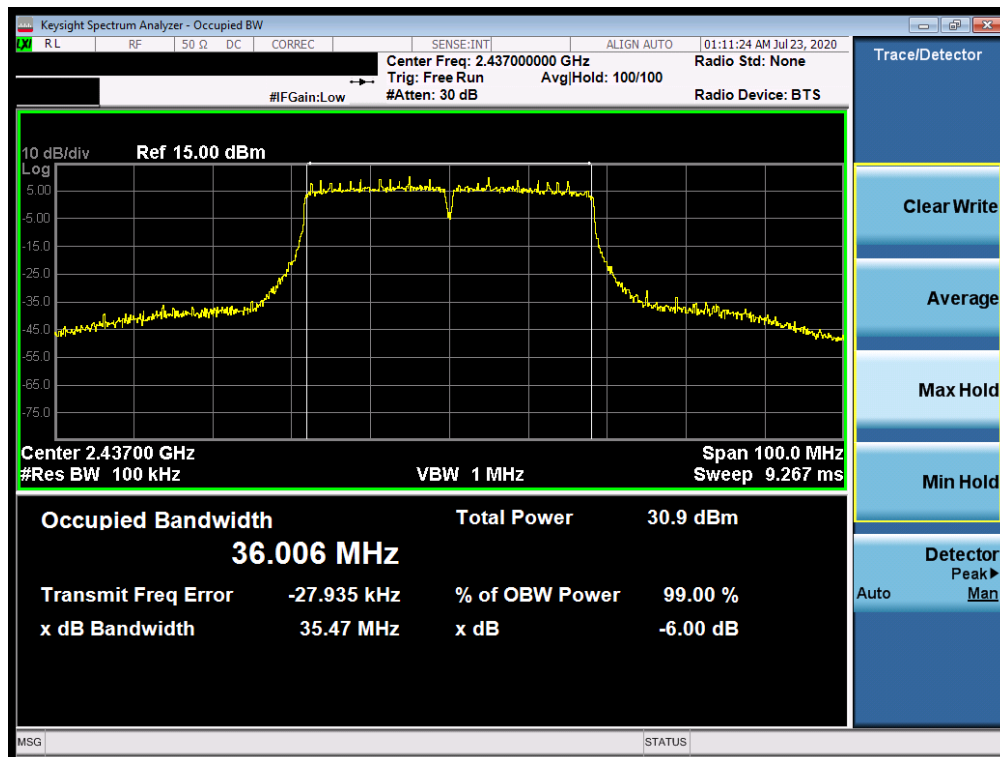


Plot 7-17. 6dB Bandwidth Plot ANT1 (802.11n (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 25 of 118 |

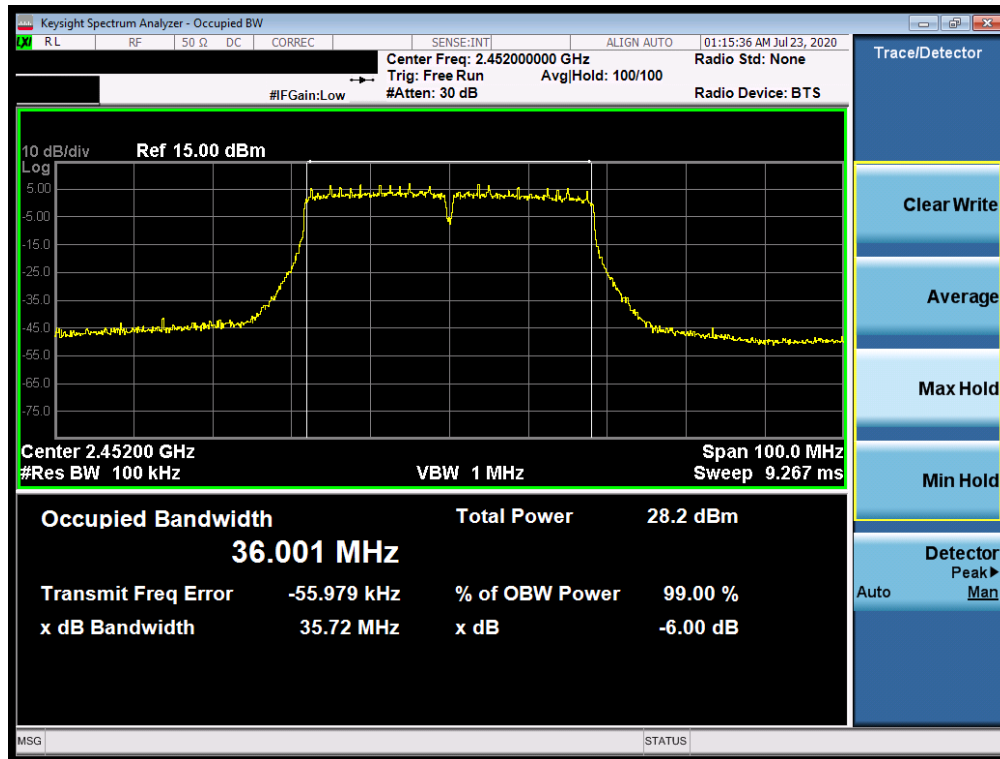


Plot 7-18. 6dB Bandwidth Plot ANT1 (802.11n (2.4GHz) – Ch. 9)

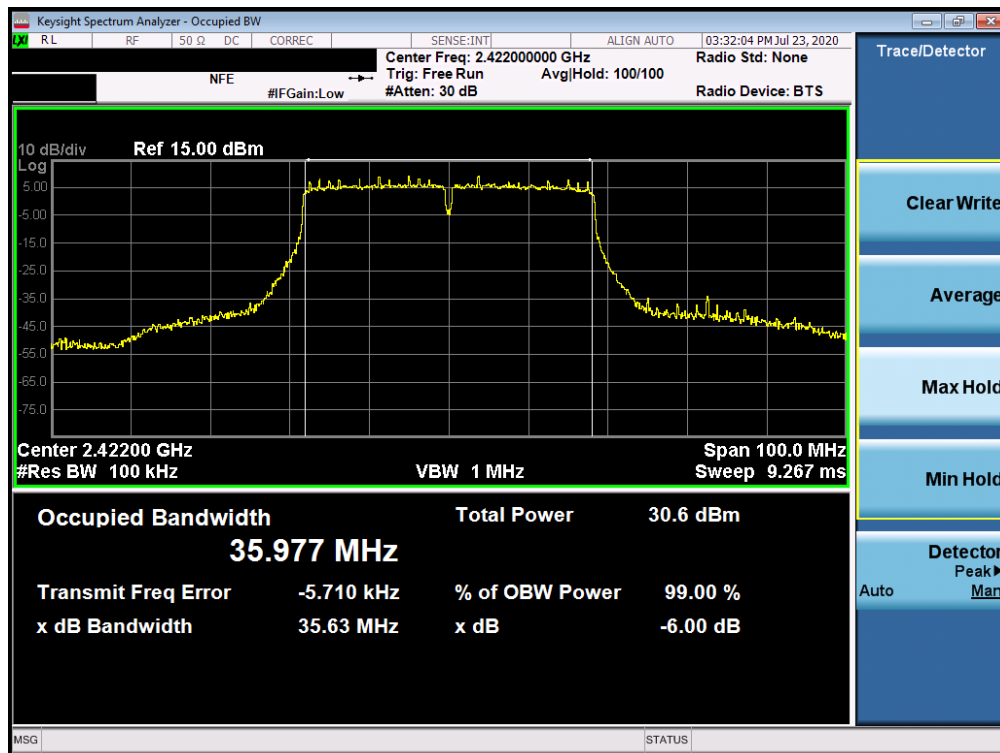


Plot 7-19. 6dB Bandwidth Plot ANT1 (802.11ac (2.4GHz) – Ch. 3)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 26 of 118 |

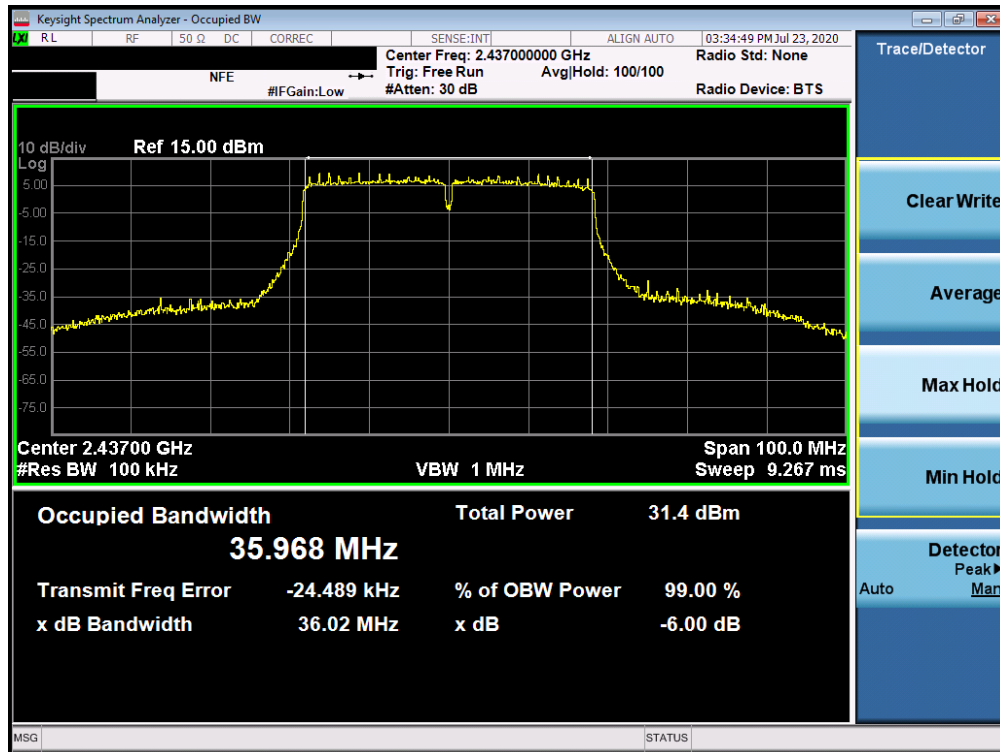


Plot 7-20. 6dB Bandwidth Plot ANT1 (802.11ac (2.4GHz) – Ch. 6)

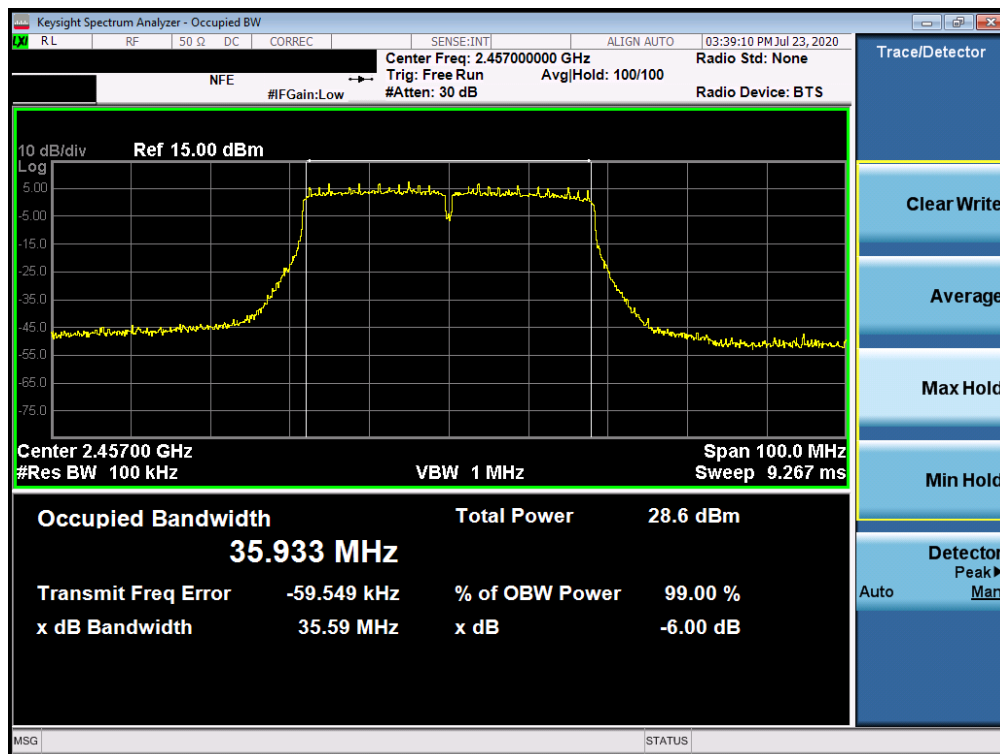


Plot 7-21. 6dB Bandwidth Plot ANT1 (802.11ac (2.4GHz) – Ch. 9)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 27 of 118 |

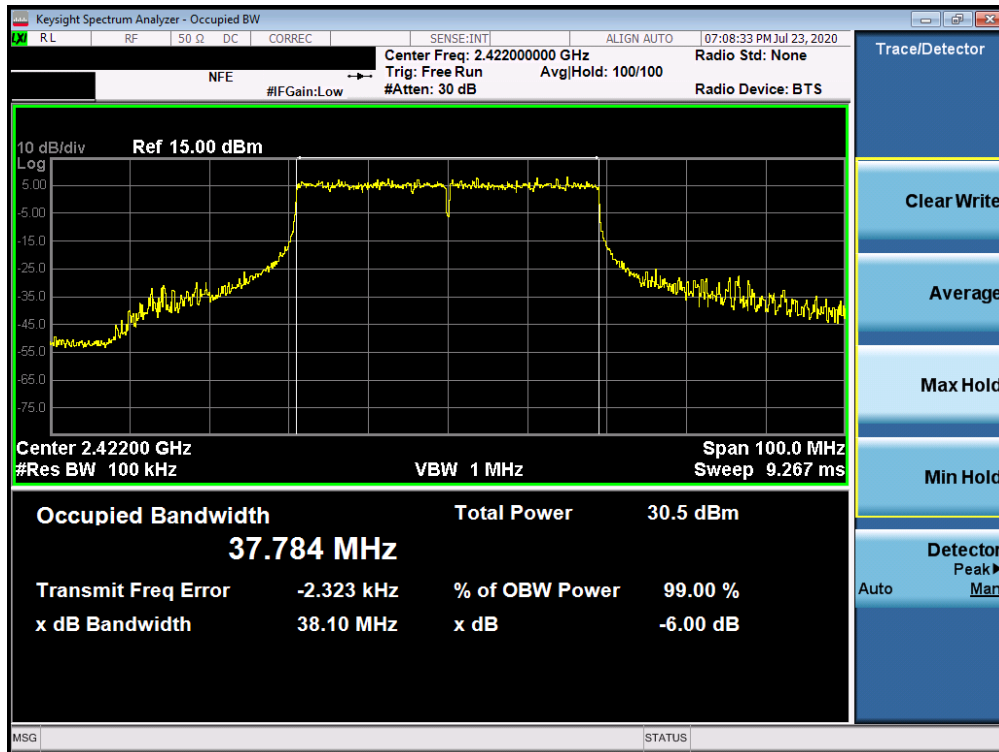


Plot 7-22. 6dB Bandwidth Plot ANT1 (802.11ax (2.4GHz) – Ch. 3)

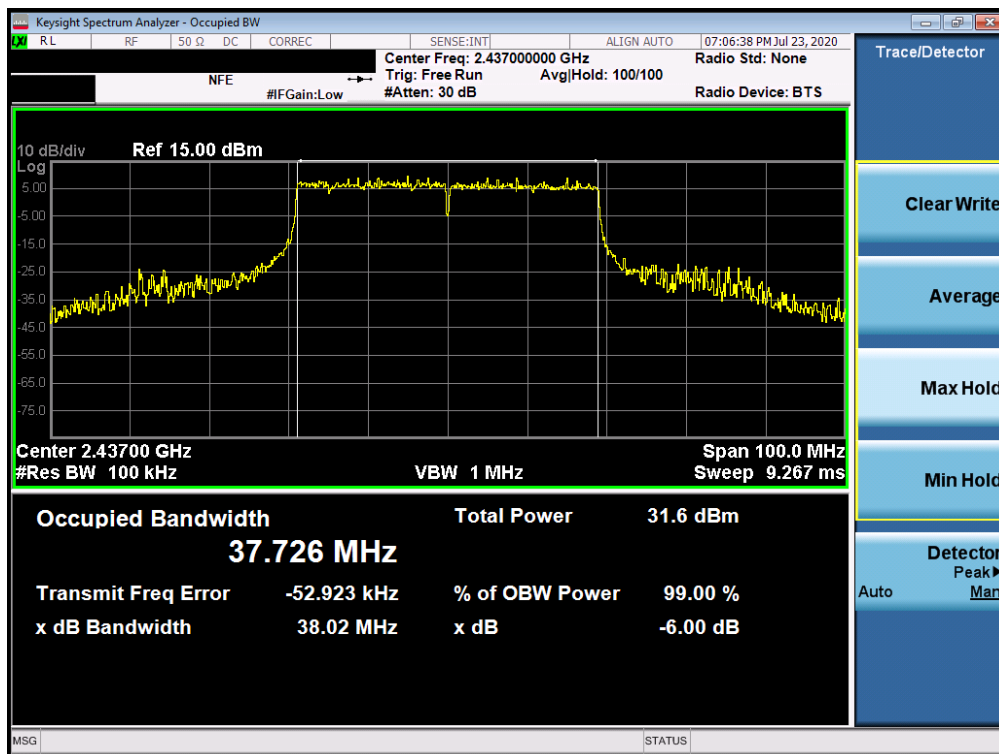

Plot 7-23. 6dB Bandwidth Plot ANT1 (802.11ax (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 28 of 118 |

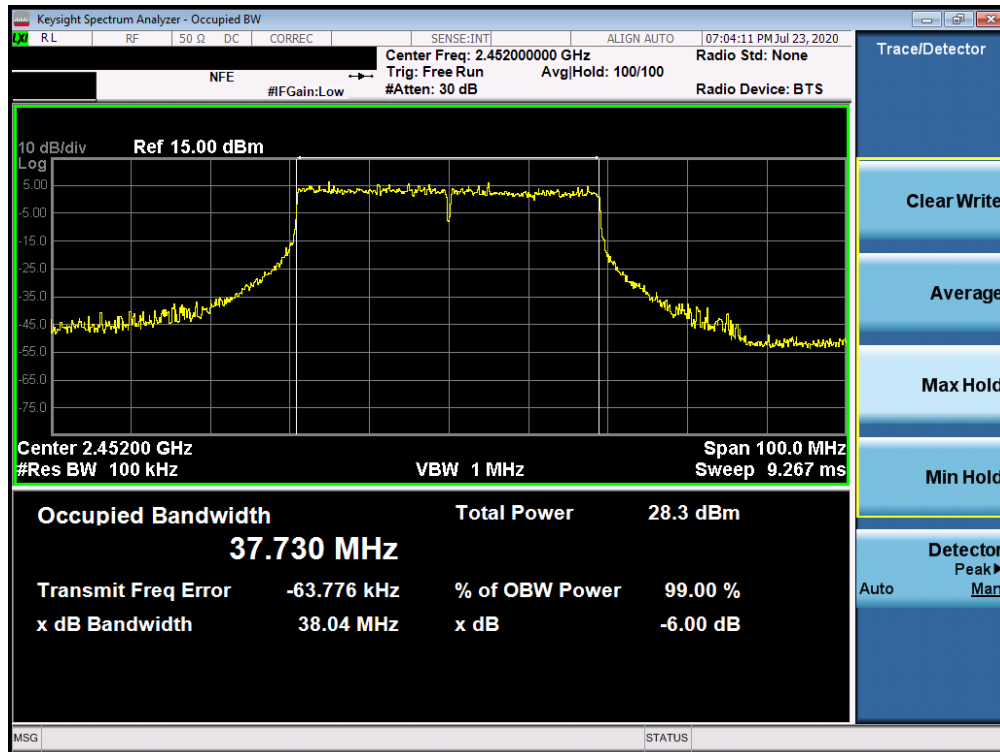

Plot 7-24. 6dB Bandwidth Plot ANT1 (802.11ax (2.4GHz) – Ch. 9)


| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 29 of 118 |

Antenna-2 6 dB Bandwidth Measurements


| Frequency [MHz] | Bandwidth [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412 | 20 | 1 | b | 1 | 8.075 | 0.500 |
| 2437 | 20 | 6 | b | 1 | 8.077 | 0.500 |
| 2462 | 20 | 11 | b | 1 | 8.078 | 0.500 |
| 2412 | 20 | 1 | g | 6 | 16.36 | 0.500 |
| 2437 | 20 | 6 | g | 6 | 16.37 | 0.500 |
| 2462 | 20 | 11 | g | 6 | 16.35 | 0.500 |
| 2412 | 20 | 1 | n | 6.5/7.2 (MCS0) | 17.59 | 0.500 |
| 2437 | 20 | 6 | n | 6.5/7.2 (MCS0) | 17.56 | 0.500 |
| 2462 | 20 | 11 | n | 6.5/7.2 (MCS0) | 17.48 | 0.500 |
| 2412 | 20 | 1 | ac | 6.5/7.2 (MCS0) | 17.56 | 0.500 |
| 2437 | 20 | 6 | ac | 6.5/7.2 (MCS0) | 17.56 | 0.500 |
| 2462 | 20 | 11 | ac | 6.5/7.2 (MCS0) | 17.43 | 0.500 |
| 2412 | 20 | 1 | ax | 6.5/7.2 (MCS0) | 18.78 | 0.500 |
| 2437 | 20 | 6 | ax | 6.5/7.2 (MCS0) | 18.86 | 0.500 |
| 2462 | 20 | 11 | ax | 6.5/7.2 (MCS0) | 18.92 | 0.500 |
| 2422 | 40 | 3 | n | 6.5/7.2 (MCS0) | 35.53 | 0.500 |
| 2437 | 40 | 6 | n | 6.5/7.2 (MCS0) | 35.81 | 0.500 |
| 2452 | 40 | 9 | n | 6.5/7.2 (MCS0) | 35.63 | 0.500 |
| 2422 | 40 | 3 | ac | 6.5/7.2 (MCS0) | 35.50 | 0.500 |
| 2437 | 40 | 6 | ac | 6.5/7.2 (MCS0) | 35.70 | 0.500 |
| 2452 | 40 | 9 | ac | 6.5/7.2 (MCS0) | 35.70 | 0.500 |
| 2422 | 40 | 3 | ax | 6.5/7.2 (MCS0) | 38.04 | 0.500 |
| 2437 | 40 | 6 | ax | 6.5/7.2 (MCS0) | 38.06 | 0.500 |
| 2452 | 40 | 9 | ax | 6.5/7.2 (MCS0) | 38.07 | 0.500 |

Table 7-3. Conducted Bandwidth Measurements ANT2

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 30 of 118 |

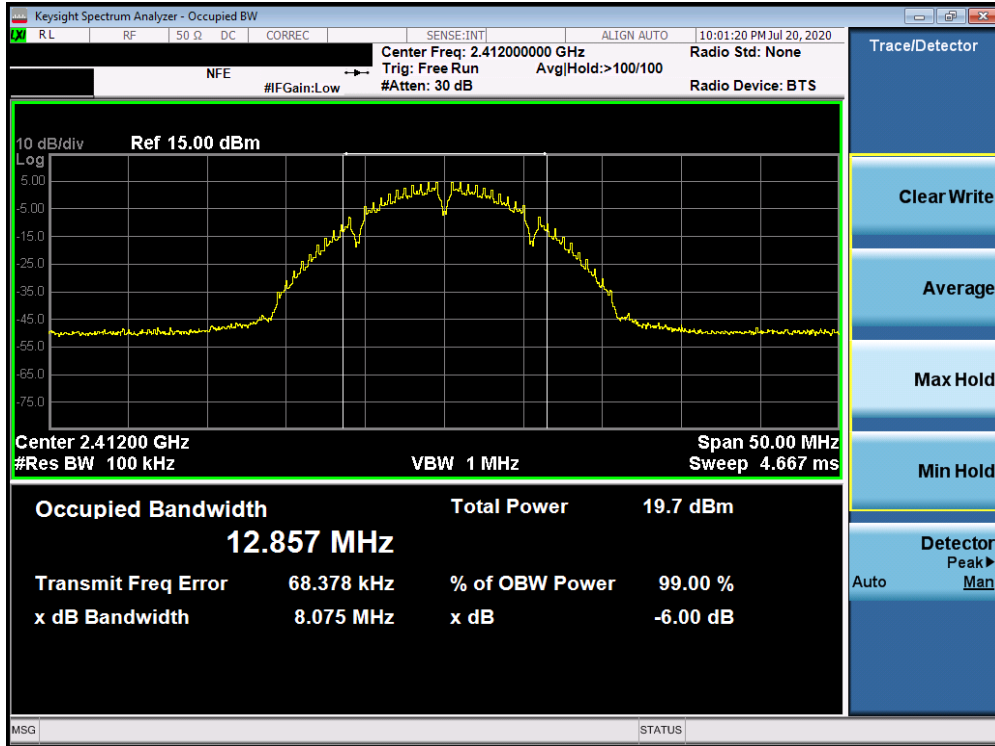


Plot 7-25. 6dB Bandwidth Plot ANT2 (802.11b – Ch. 1)

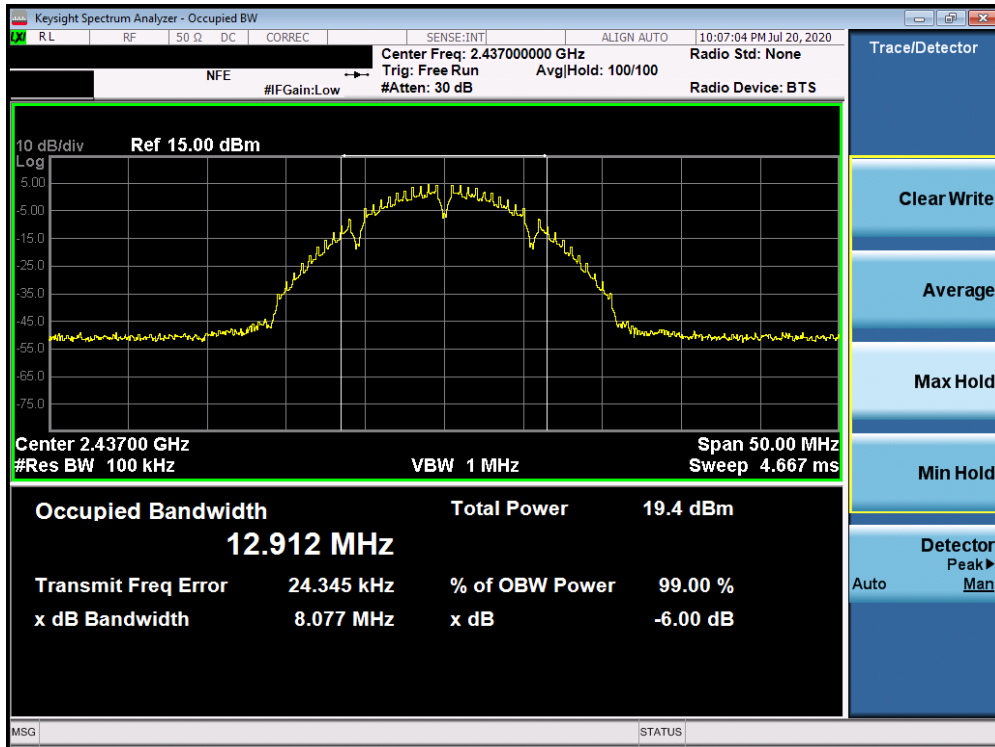


Plot 7-26. 6dB Bandwidth Plot ANT2 (802.11b – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 31 of 118 |

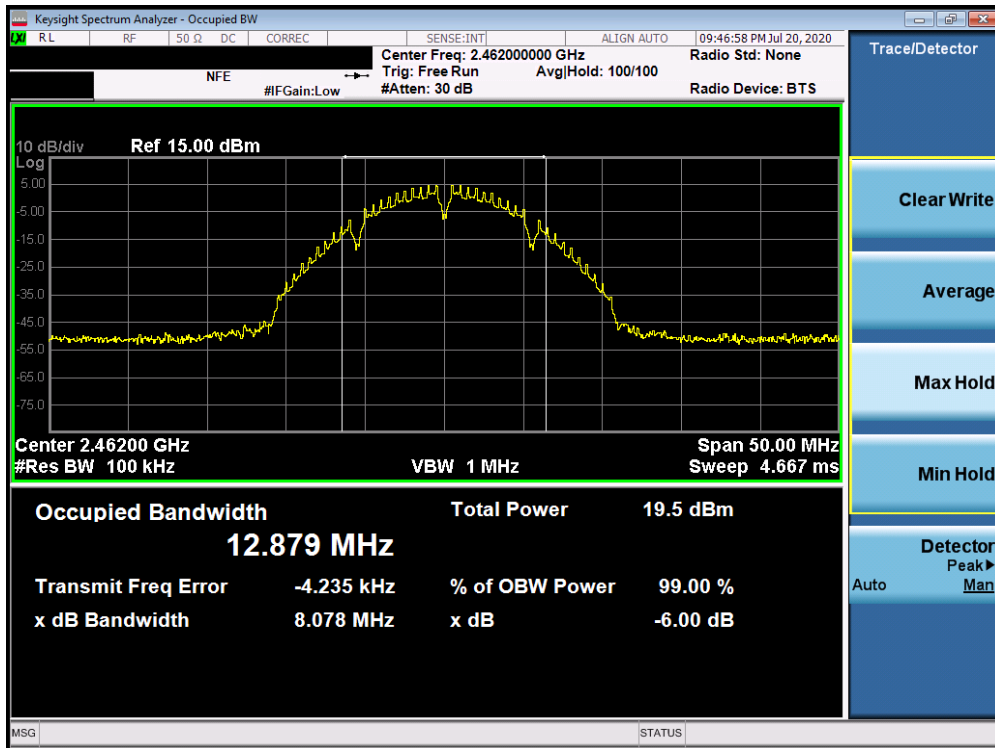


Plot 7-27. 6dB Bandwidth Plot ANT2 (802.11b – Ch. 11)

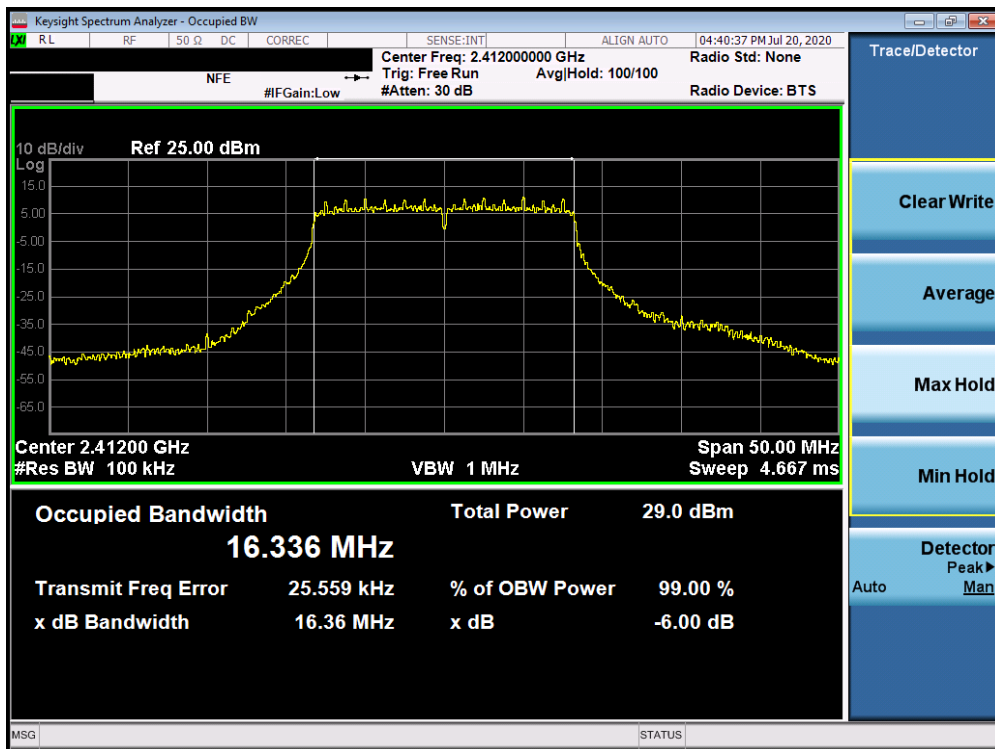


Plot 7-28. 6dB Bandwidth Plot ANT2 (802.11g – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 32 of 118 |

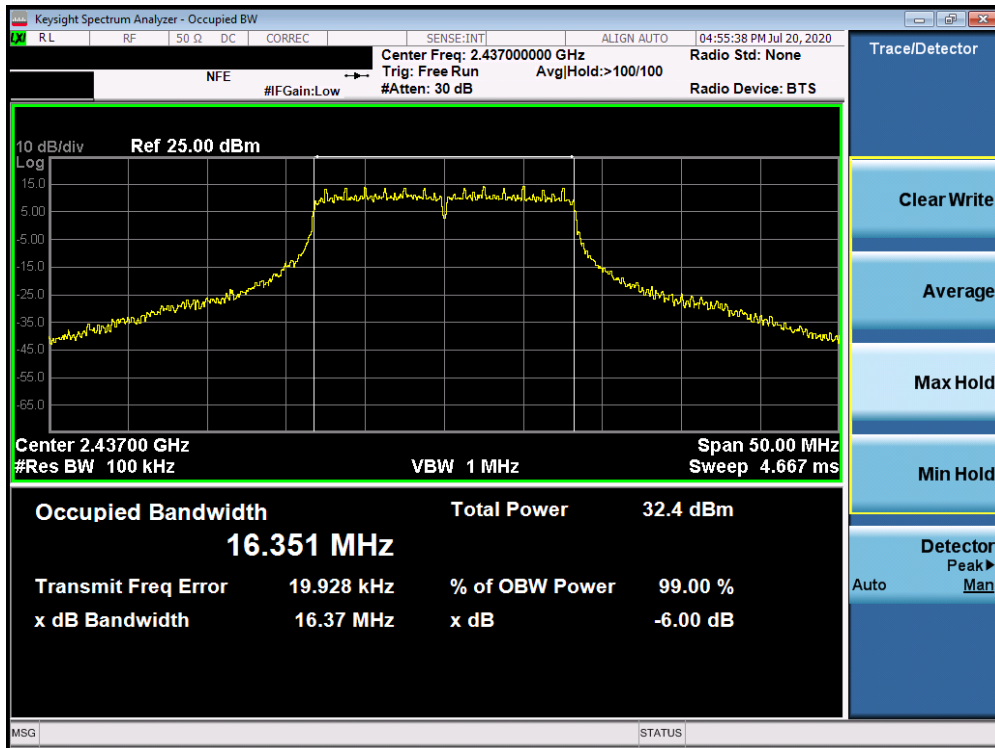

Plot 7-29. 6dB Bandwidth Plot ANT2 (802.11g – Ch. 6)

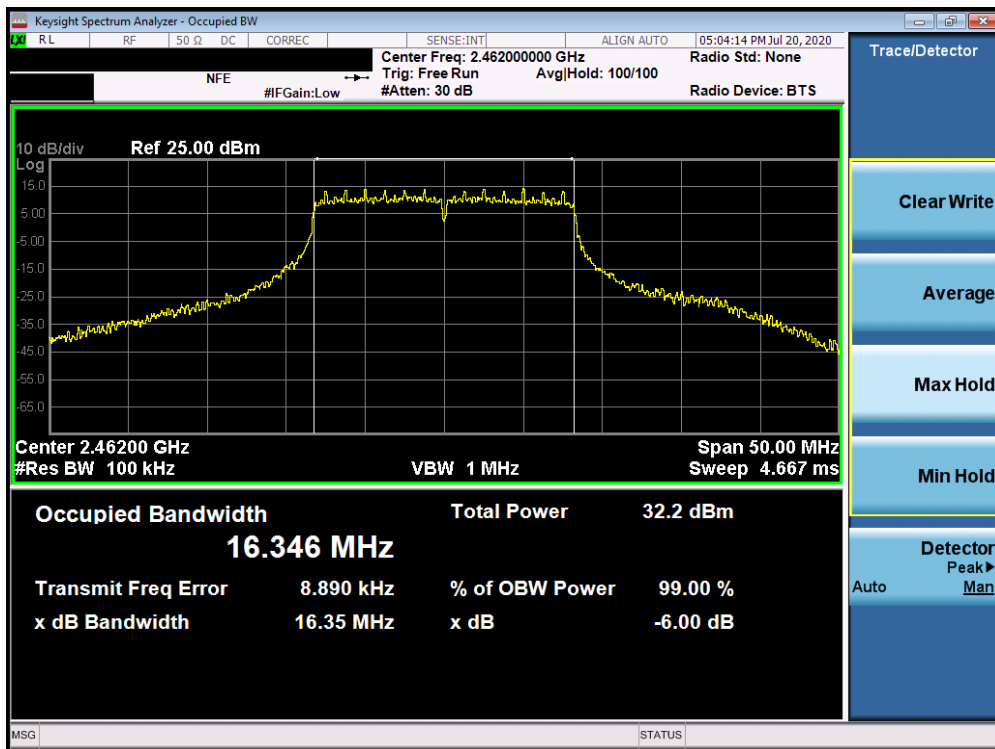


Plot 7-30. 6dB Bandwidth Plot ANT2 (802.11g – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 33 of 118 |




Plot 7-31. 6dB Bandwidth Plot ANT2 (802.11n (2.4GHz) – Ch. 1)

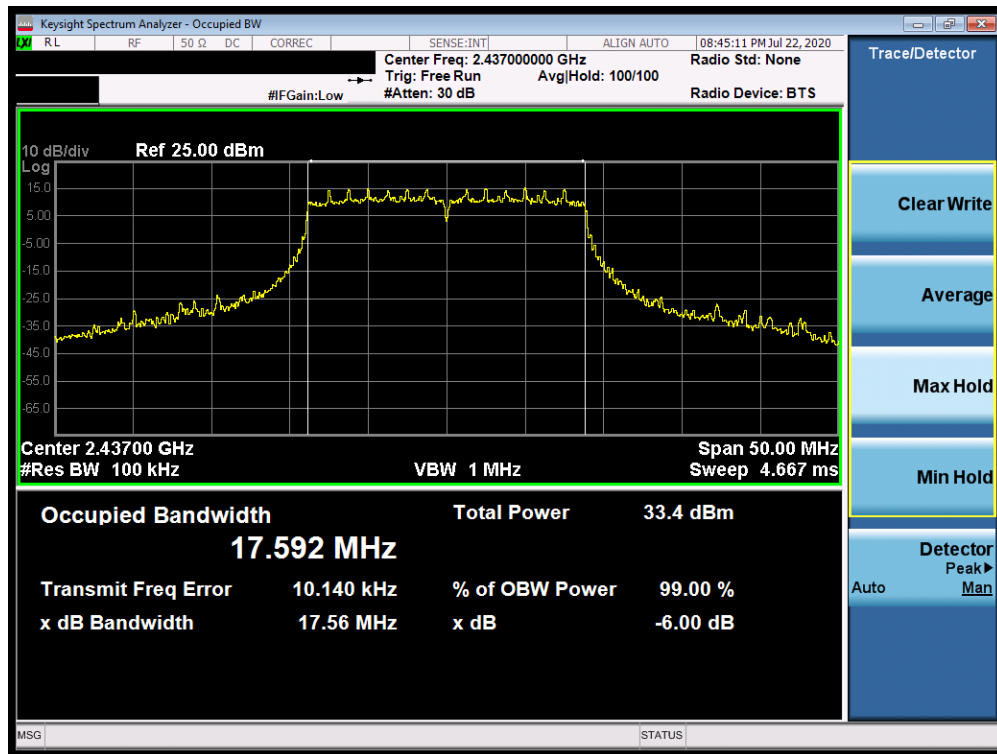


Plot 7-32. 6dB Bandwidth Plot ANT2 (802.11n (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 34 of 118 |

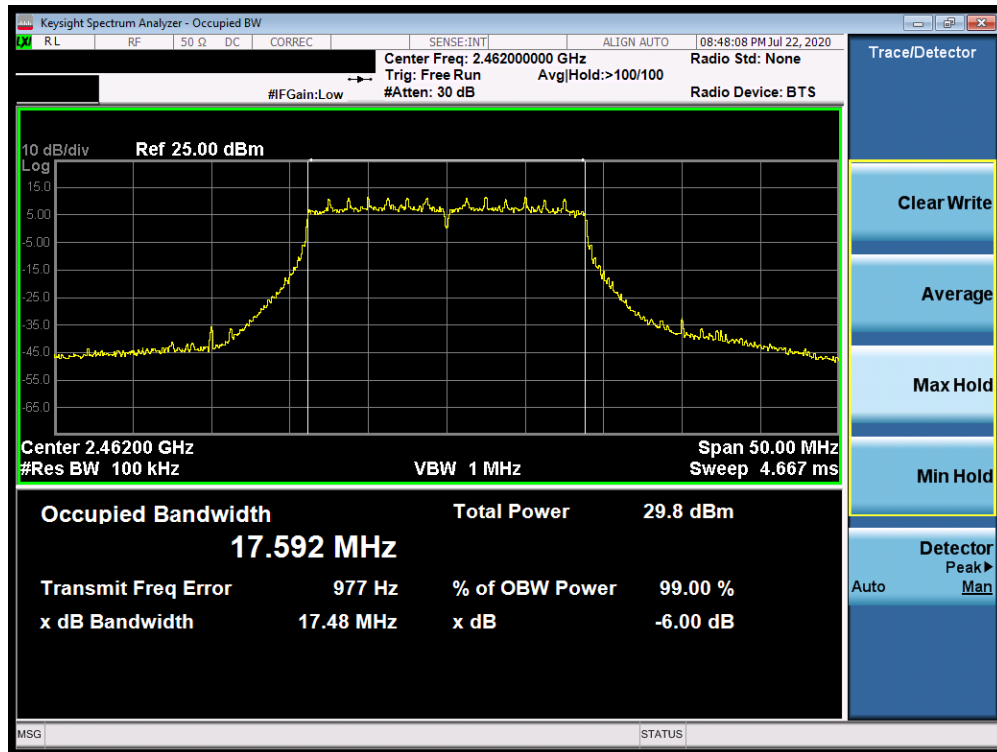


Plot 7-33. 6dB Bandwidth Plot ANT2 (802.11n (2.4GHz) – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 35 of 118 |

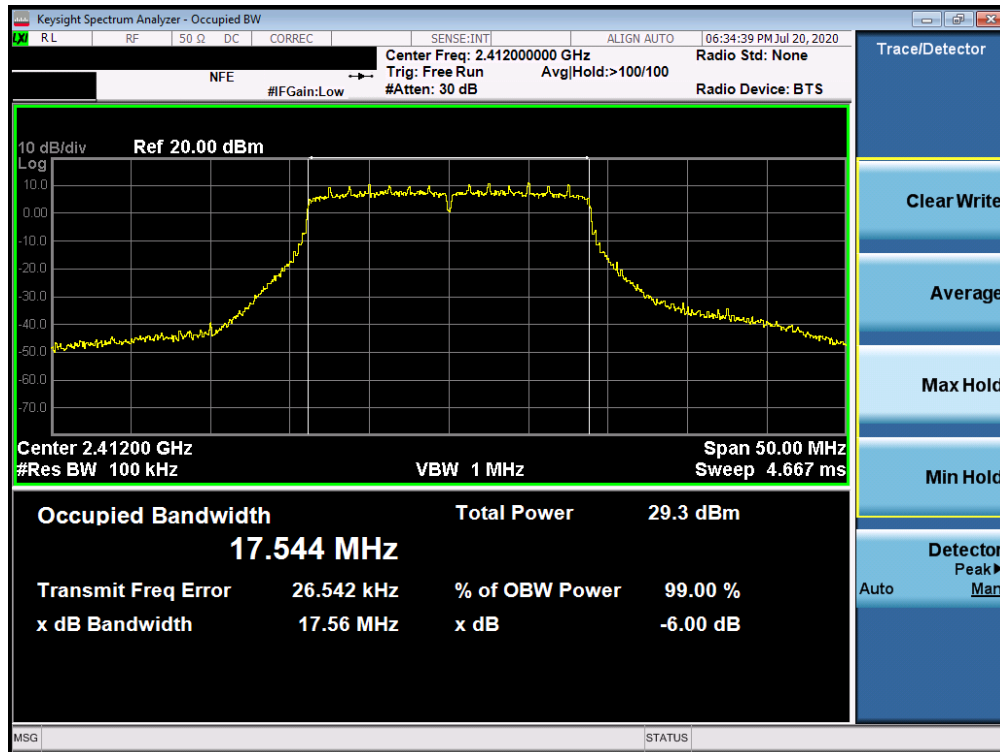


Plot 7-34. 6dB Bandwidth Plot ANT2 (802.11ac (2.4GHz) – Ch. 1)

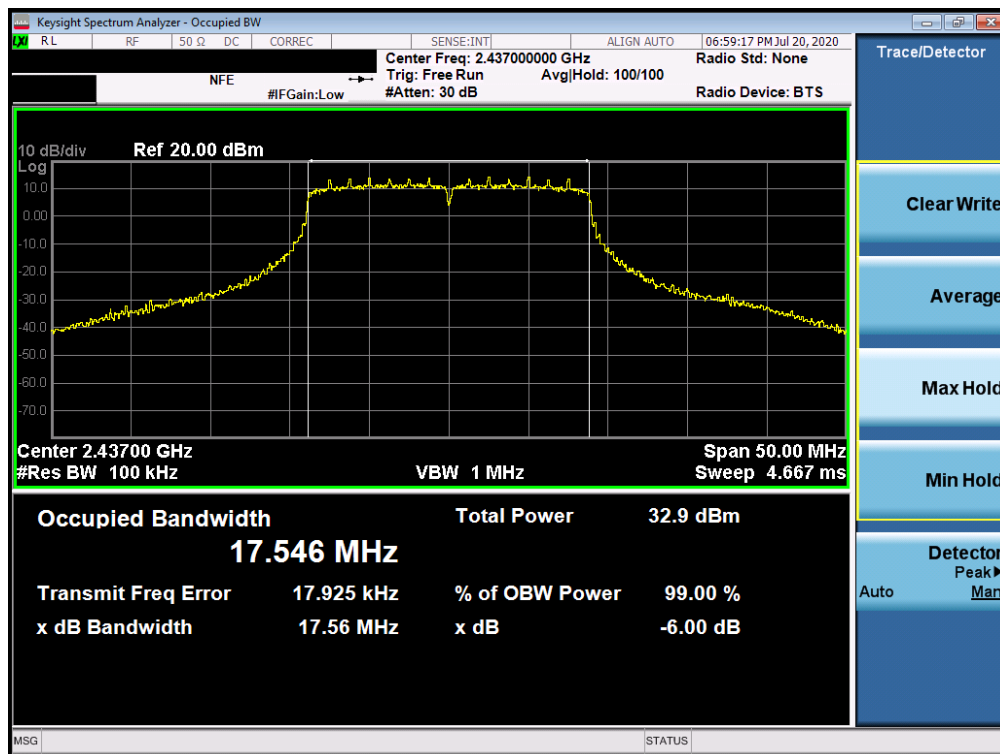


Plot 7-35. 6dB Bandwidth Plot ANT2 (802.11ac (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 36 of 118 |

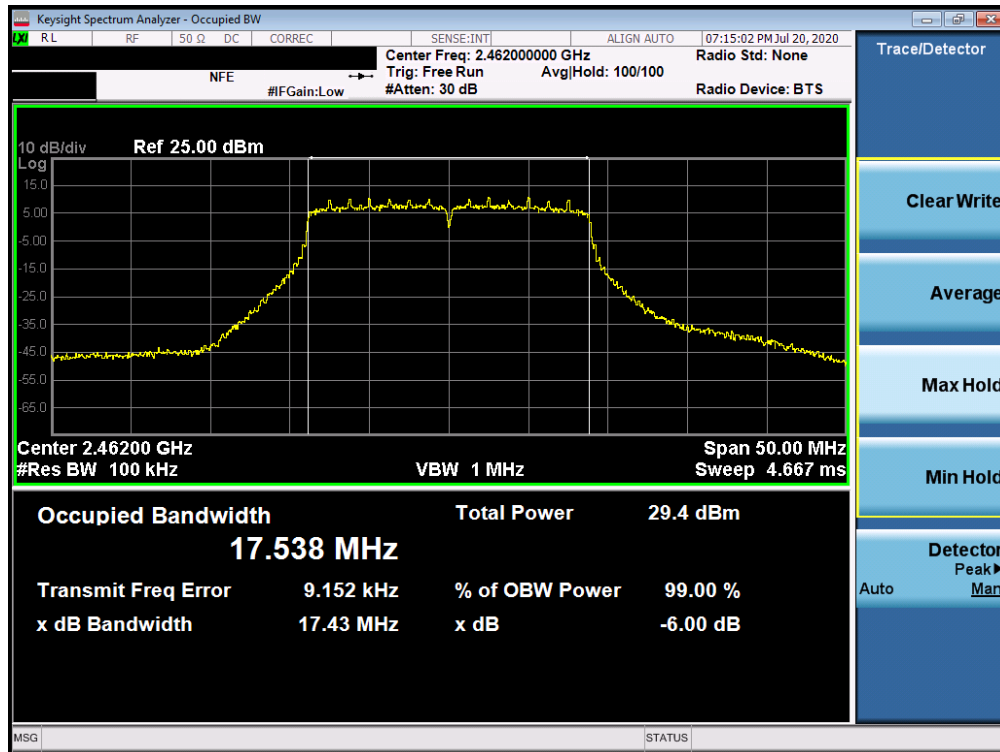


Plot 7-36. 6dB Bandwidth Plot ANT2 (802.11ac (2.4GHz) – Ch. 11)

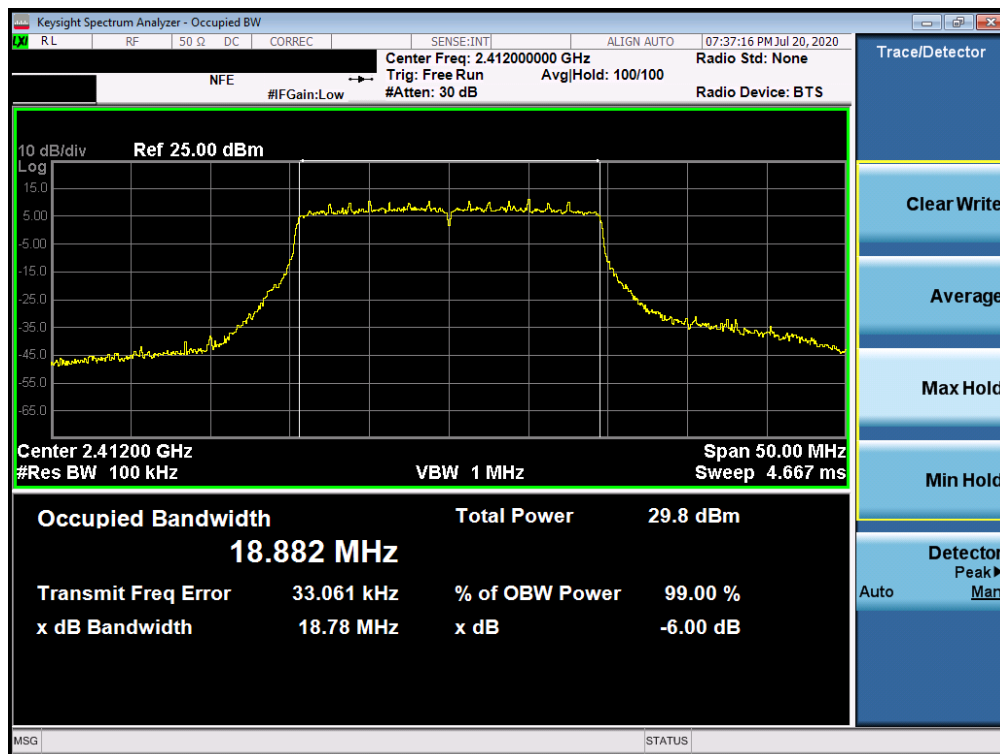


Plot 7-37. 6dB Bandwidth Plot ANT2 (802.11ax (2.4GHz) – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 37 of 118 |

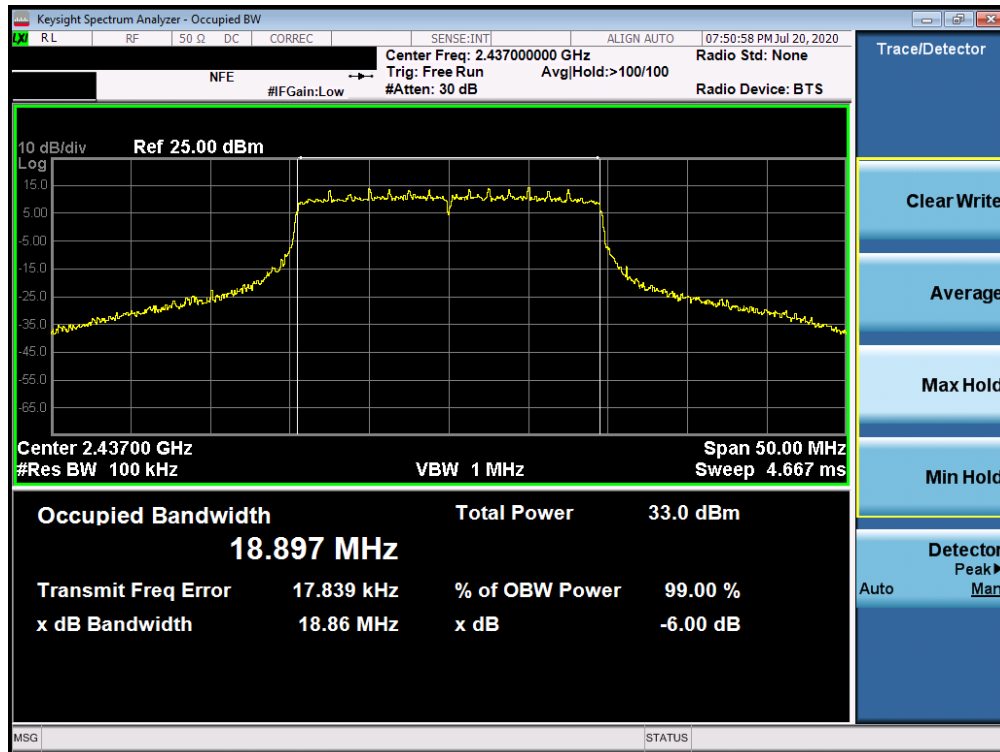


Plot 7-38. 6dB Bandwidth Plot ANT2 (802.11ax (2.4GHz) – Ch. 6)

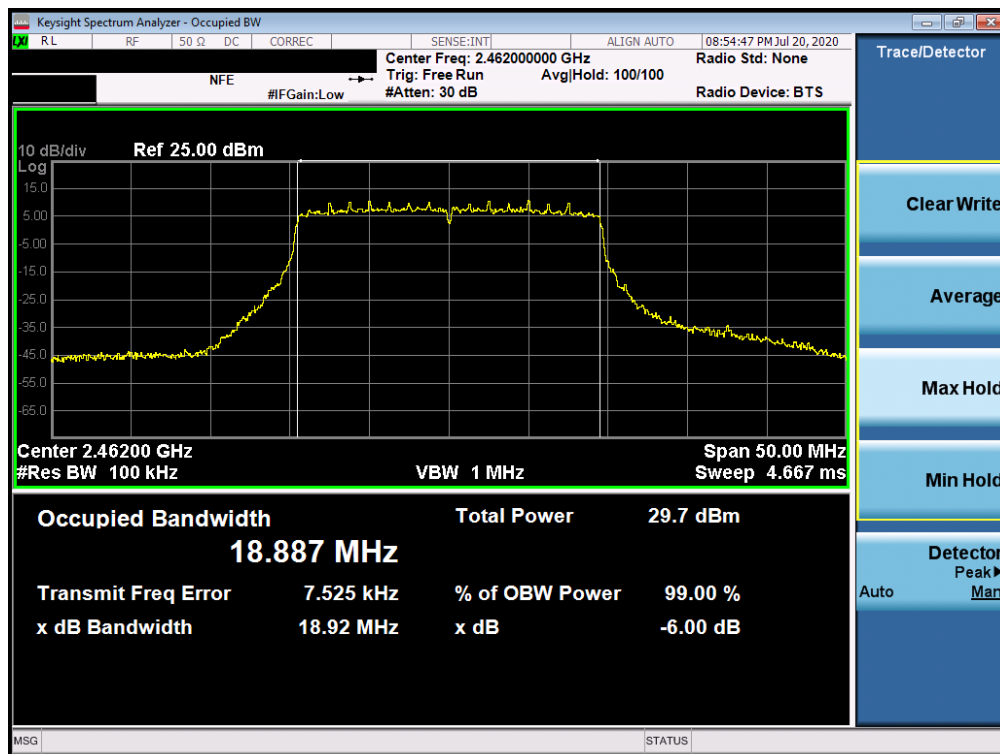


Plot 7-39. 6dB Bandwidth Plot ANT2 (802.11ax (2.4GHz) – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 38 of 118 |

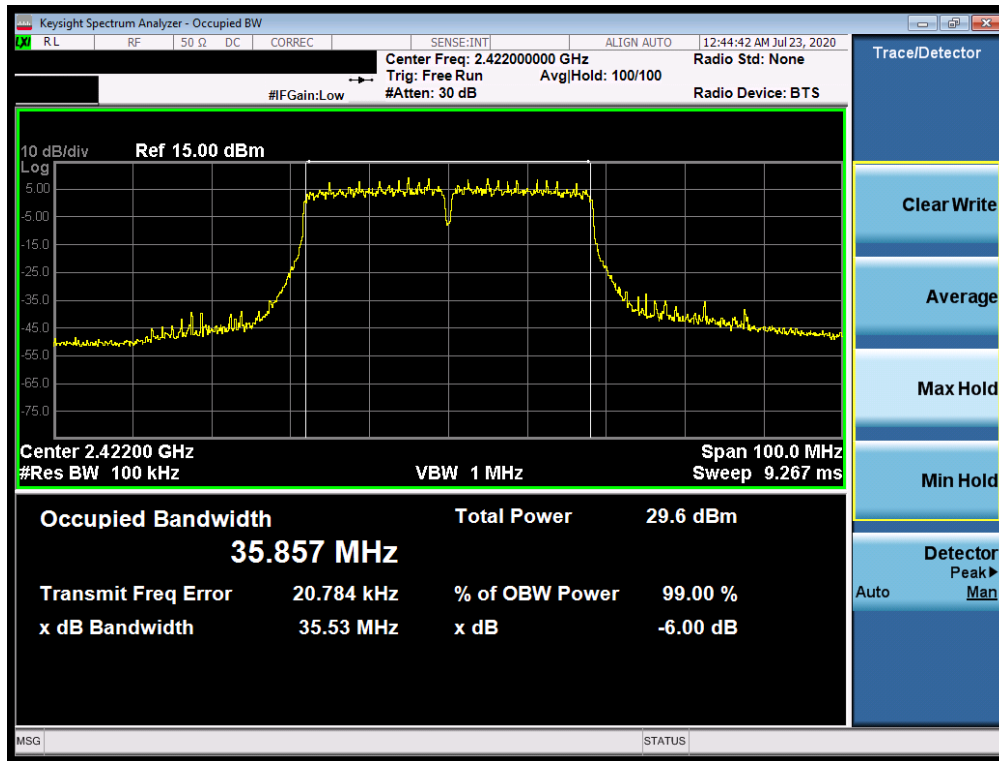


Plot 7-40. 6dB Bandwidth Plot ANT2 (802.11n (2.4GHz) – Ch. 3)

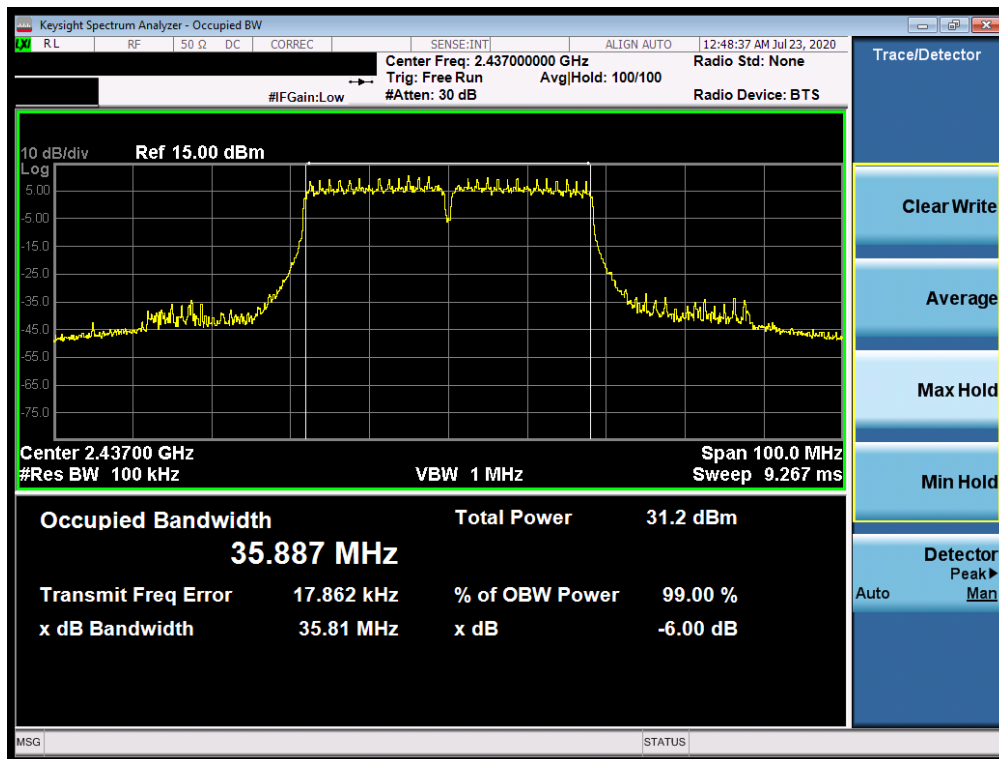


Plot 7-41. 6dB Bandwidth Plot ANT2 (802.11n (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 39 of 118 |

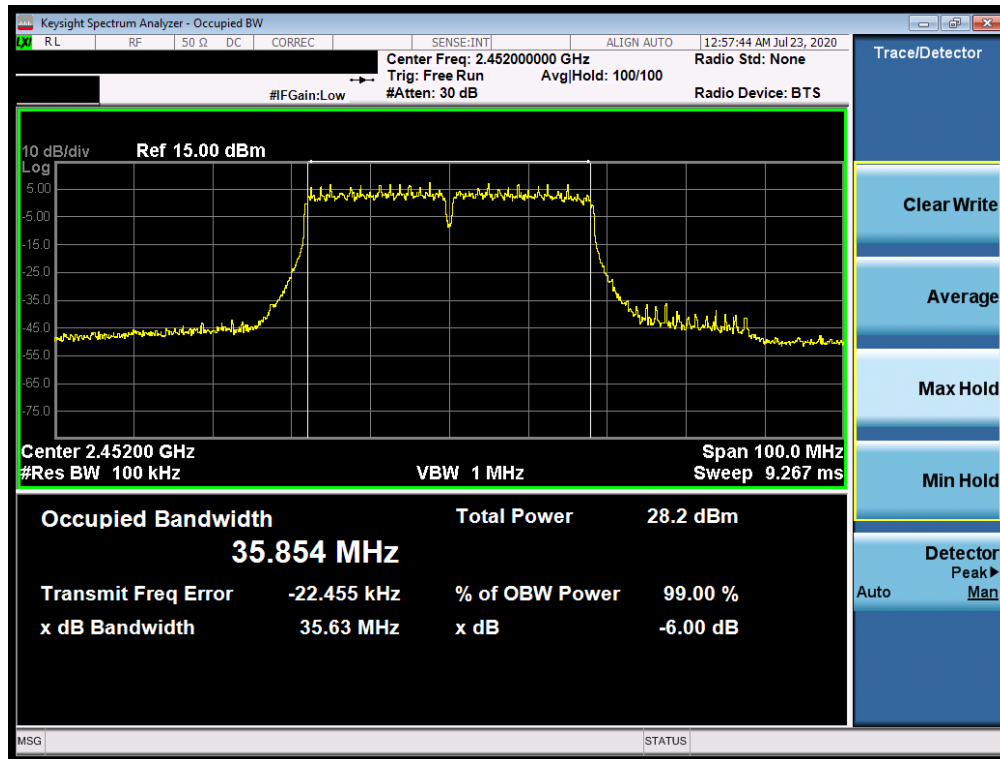


Plot 7-42. 6dB Bandwidth Plot ANT2 (802.11n (2.4GHz) – Ch. 9)

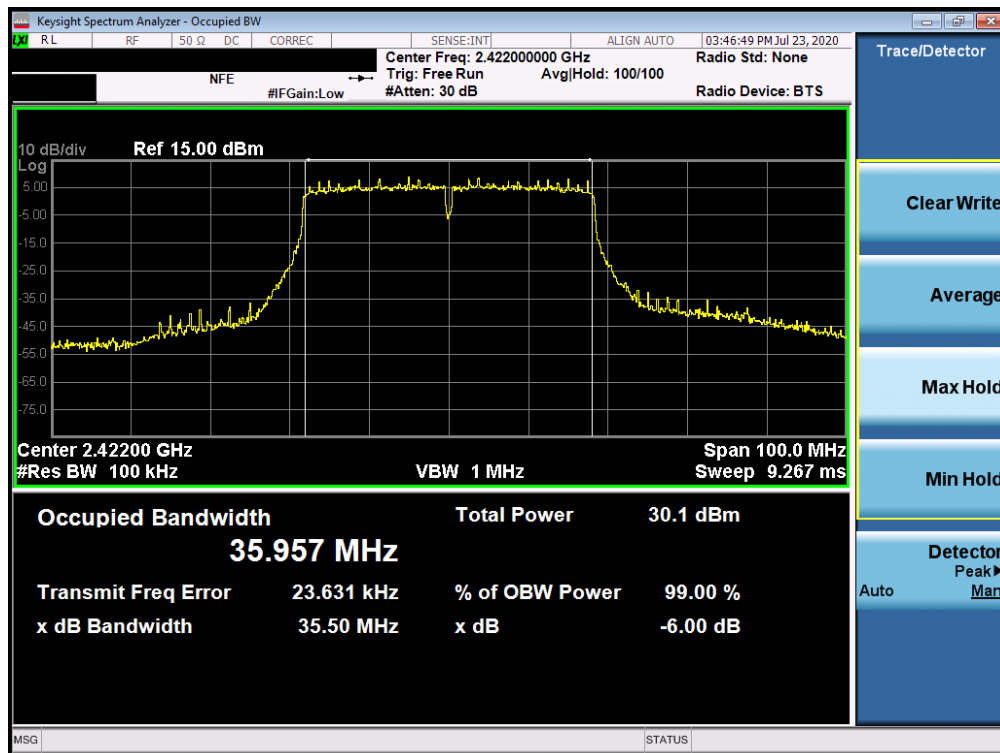


Plot 7-43. 6dB Bandwidth Plot ANT2 (802.11ac (2.4GHz) – Ch. 3)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 40 of 118 |

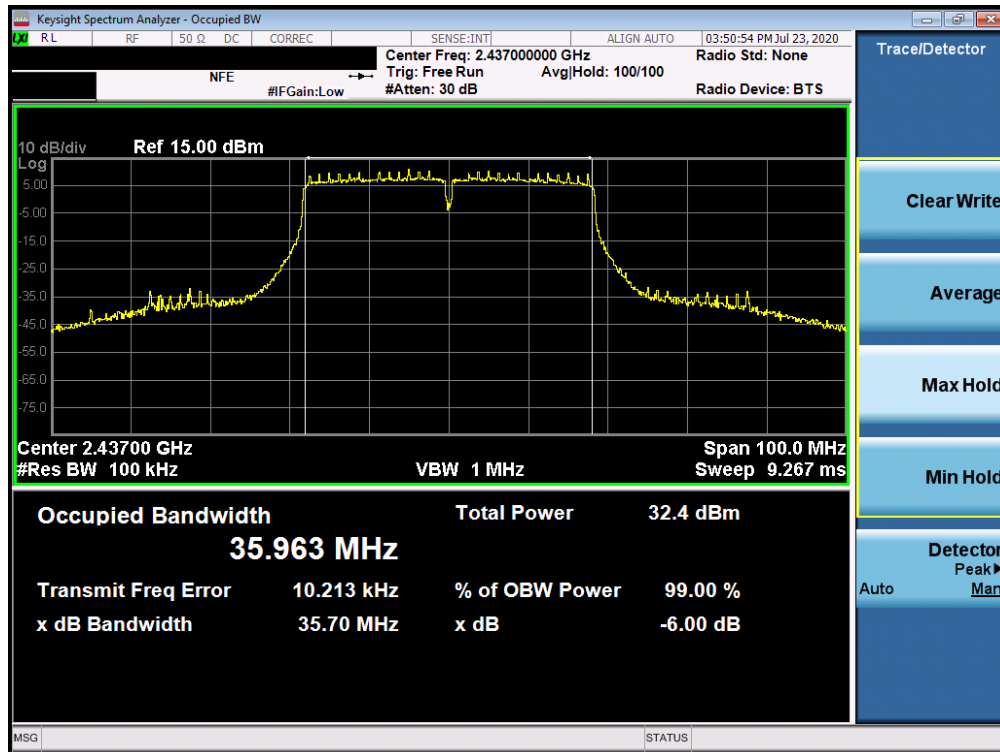


Plot 7-44. 6dB Bandwidth Plot ANT2 (802.11ac (2.4GHz) – Ch. 6)

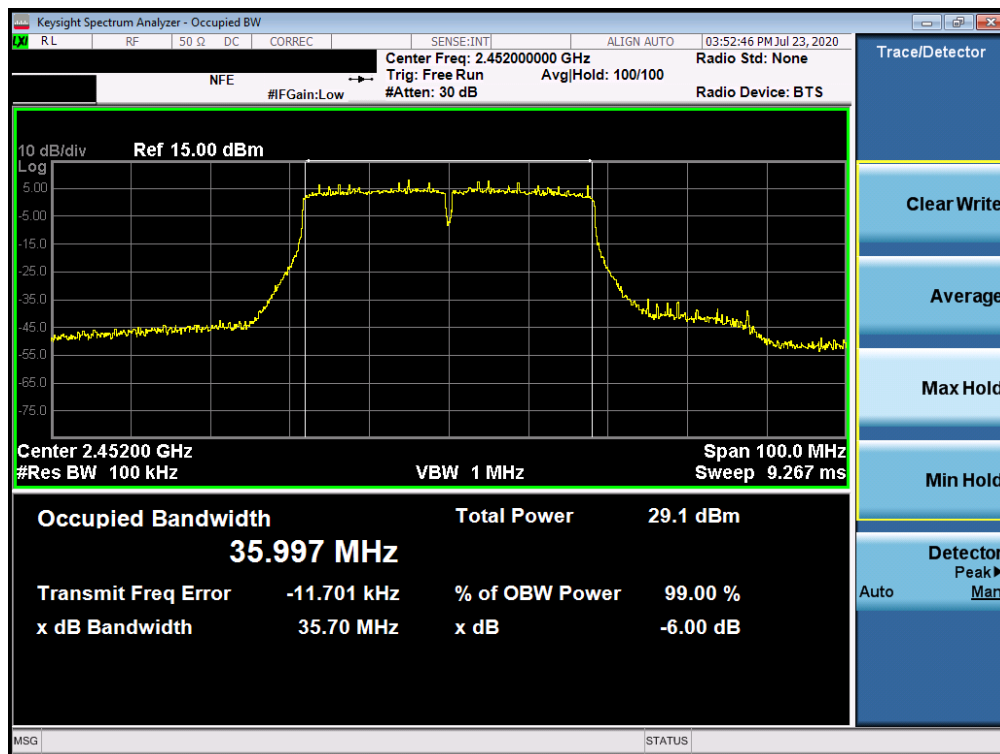


Plot 7-45. 6dB Bandwidth Plot ANT2 (802.11ac (2.4GHz) – Ch. 9)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 41 of 118 |

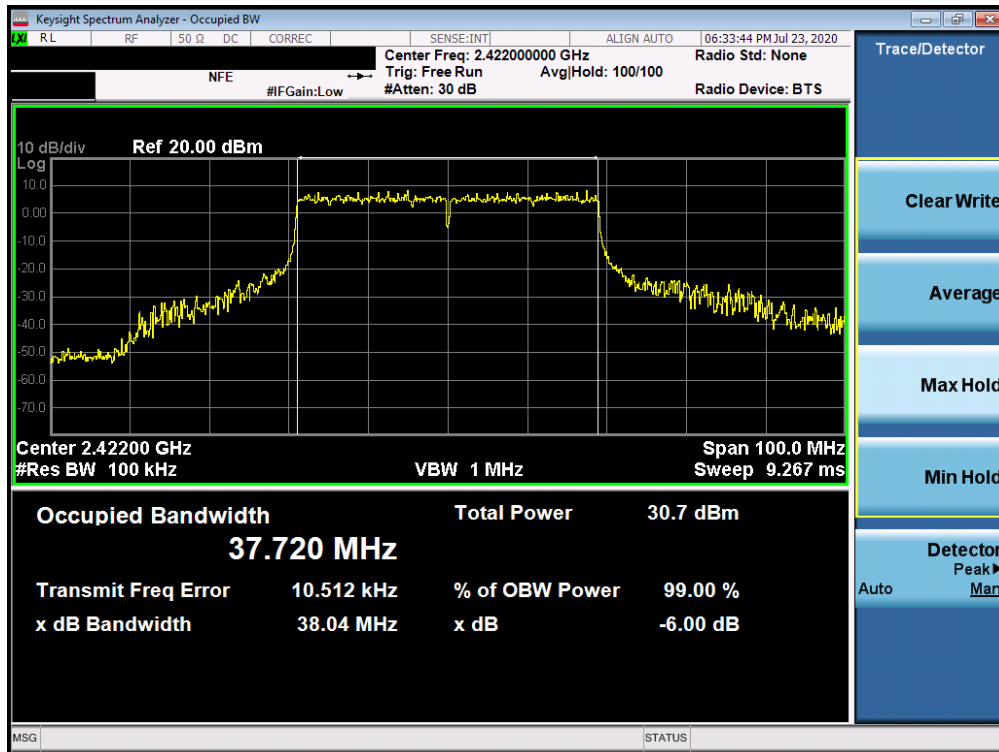


Plot 7-46. 6dB Bandwidth Plot ANT2 (802.11ax (2.4GHz) – Ch. 3)

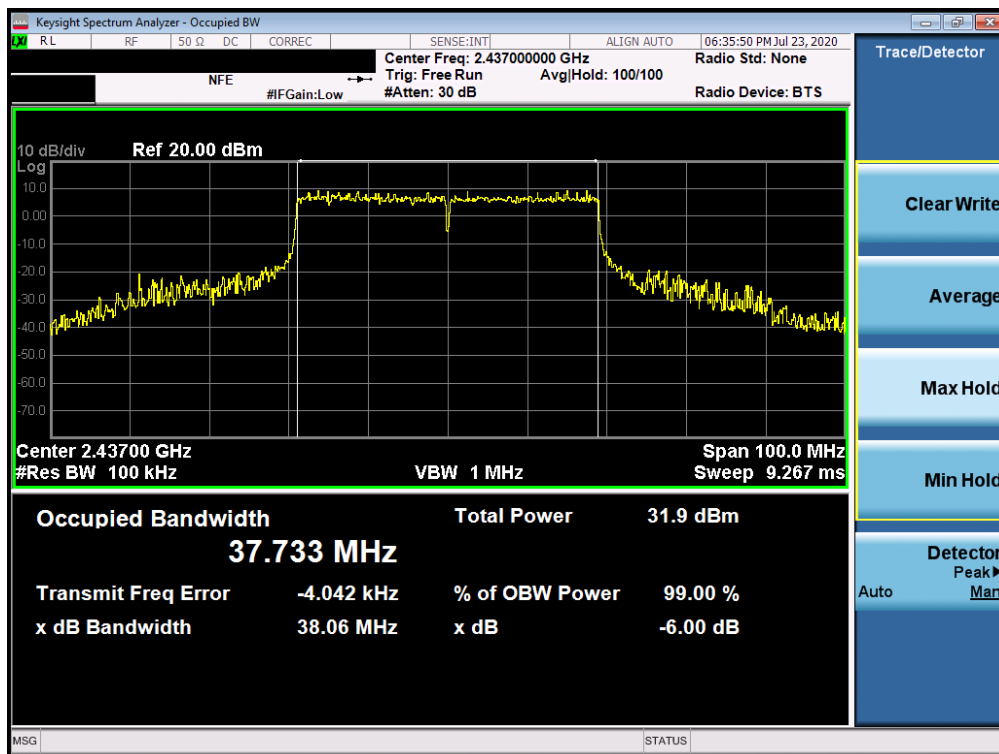

Plot 7-47. 6dB Bandwidth Plot ANT2 (802.11ax (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 42 of 118 |

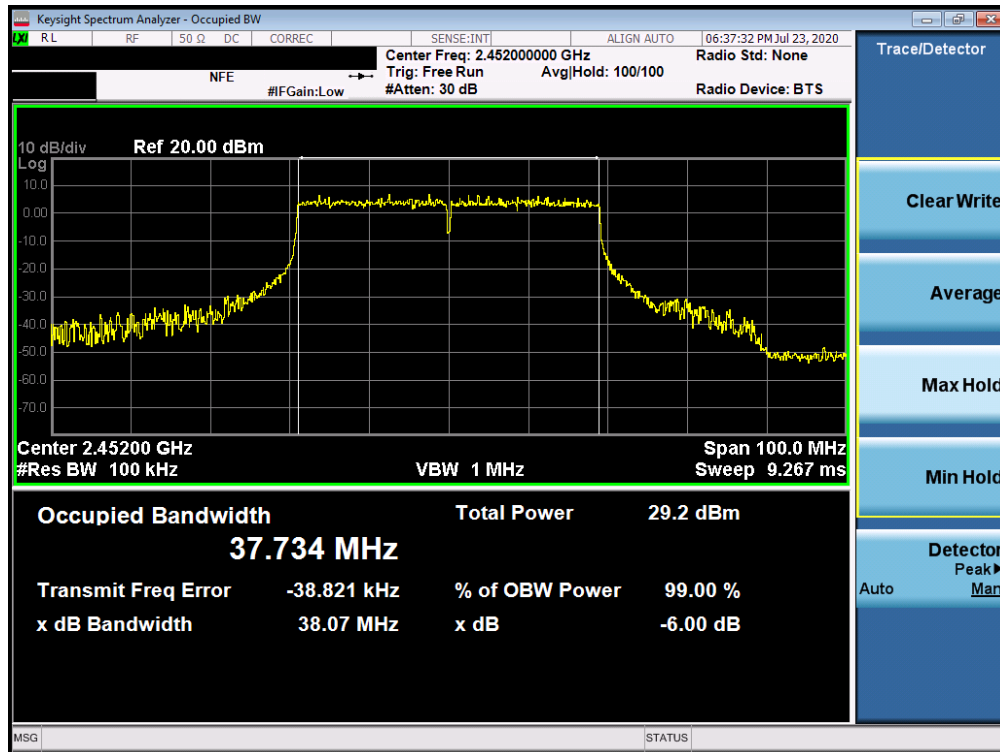

Plot 7-48. 6dB Bandwidth Plot ANT2 (802.11ax (2.4GHz) – Ch. 9)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 43 of 118 |

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 44 of 118 | |

| 2.4GHz (20MHz Bandwidth) | 2.4GHz 802.11b Conducted Power [dBm] | | | | |
|--------------------------------|--------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2412 | 1 | 21.35 | 21.36 | 24.37 |
| | PEAK | 1 | 24.06 | 24.02 | 27.05 |
| | 2437 | 6 | 21.27 | 21.19 | 24.24 |
| | PEAK | 6 | 23.98 | 23.82 | 26.91 |
| | 2462 | 11 | 21.47 | 21.32 | 24.41 |
| PEAK | 11 | 24.09 | 23.95 | 27.03 | |

Table 7-4. Conducted Output Power Measurements MIMO (802.11b 20MHz)

| 2.4GHz (20MHz Bandwidth) | 2.4GHz 802.11g Conducted Power [dBm] | | | | |
|--------------------------------|--------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2412 | 1 | 20.17 | 20.18 | 23.19 |
| | PEAK | 1 | 26.75 | 26.70 | 29.74 |
| | 2437 | 6 | 20.04 | 20.02 | 23.04 |
| | PEAK | 6 | 26.70 | 26.86 | 29.79 |
| | 2462 | 11 | 20.31 | 20.14 | 23.24 |
| PEAK | 11 | 26.83 | 26.47 | 29.66 | |

Table 7-5. Conducted Output Power Measurements MIMO (802.11g 20MHz)

| 2.4GHz (20MHz Bandwidth) | 2.4GHz 802.11n Conducted Power [dBm] | | | | |
|--------------------------------|--------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2412 | 1 | 20.32 | 20.16 | 23.25 |
| | PEAK | 1 | 26.68 | 26.79 | 29.75 |
| | 2437 | 6 | 20.36 | 20.25 | 23.32 |
| | PEAK | 6 | 26.78 | 26.70 | 29.75 |
| | 2462 | 11 | 20.45 | 20.14 | 23.31 |
| PEAK | 11 | 26.86 | 26.81 | 29.85 | |

Table 7-6. Conducted Output Power Measurements MIMO (802.11n 20MHz)

| 2.4GHz (20MHz Bandwidth) | 2.4GHz 802.11ac Conducted Power [dBm] | | | | |
|--------------------------------|---------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2412 | 1 | 20.34 | 20.38 | 23.37 |
| | PEAK | 1 | 26.72 | 26.84 | 29.79 |
| | 2437 | 6 | 20.13 | 20.35 | 23.25 |
| | PEAK | 6 | 26.68 | 26.70 | 29.7 |
| | 2462 | 11 | 20.45 | 20.18 | 23.33 |
| PEAK | 11 | 26.95 | 26.66 | 29.82 | |

Table 7-7. Conducted Output Power Measurements MIMO (802.11ac 20MHz)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 45 of 118 |

| 2.4GHz (20MHz Bandwidth) | 2.4GHz 802.11ax Conducted Power [dBm] | | | | |
|--------------------------------|---------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2412 | 1 | 19.82 | 19.95 | 22.90 |
| | PEAK | 1 | 26.71 | 26.84 | 29.79 |
| | 2437 | 6 | 19.75 | 19.95 | 22.86 |
| | PEAK | 6 | 26.75 | 26.72 | 29.75 |
| | 2462 | 11 | 19.86 | 19.66 | 22.77 |
| PEAK | 11 | 26.71 | 26.39 | 29.56 | |

Table 7-8. Conducted Output Power Measurements MIMO (802.11ax 20MHz)

| 2.4GHz (40MHz Bandwidth) | 2.4GHz 802.11n Conducted Power [dBm] | | | | |
|--------------------------------|--------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2422 | 3 | 20.40 | 19.98 | 23.21 |
| | PEAK | 3 | 26.67 | 26.24 | 29.47 |
| | 2437 | 6 | 20.14 | 20.18 | 23.17 |
| | PEAK | 6 | 26.40 | 26.31 | 29.37 |
| | 2452 | 9 | 20.50 | 20.31 | 23.42 |
| PEAK | 9 | 26.81 | 26.49 | 29.66 | |

Table 7-9. Conducted Output Power Measurements MIMO (802.11n 40MHz)

| 2.4GHz (40MHz Bandwidth) | 2.4GHz 802.11ac Conducted Power [dBm] | | | | |
|--------------------------------|---------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2422 | 3 | 20.49 | 20.23 | 23.37 |
| | PEAK | 3 | 27.11 | 26.52 | 29.84 |
| | 2437 | 6 | 20.33 | 20.42 | 23.39 |
| | PEAK | 6 | 26.61 | 26.70 | 29.67 |
| | 2452 | 9 | 20.43 | 20.33 | 23.39 |
| PEAK | 9 | 26.78 | 26.49 | 29.65 | |

Table 7-10. Conducted Output Power Measurements MIMO (802.11ac 40MHz)

| 2.4GHz (40MHz Bandwidth) | 2.4GHz 802.11ax Conducted Power [dBm] | | | | |
|--------------------------------|---------------------------------------|---------|-------|-------|-------|
| | Freq [MHz] | Channel | ANT1 | ANT2 | MIMO |
| | 2422 | 3 | 20.15 | 19.87 | 23.02 |
| | PEAK | 3 | 26.76 | 26.35 | 29.57 |
| | 2437 | 6 | 20.01 | 20.01 | 23.02 |
| | PEAK | 6 | 26.67 | 26.45 | 29.57 |
| | 2452 | 9 | 20.45 | 20.02 | 23.25 |
| PEAK | 9 | 26.80 | 26.50 | 29.66 | |

Table 7-11. Conducted Output Power Measurements MIMO (802.11ax 40MHz)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 46 of 118 | |

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 21.22 dBm for Antenna-1 and 21.36 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(21.22 \text{ dBm} + 21.36 \text{ dBm}) = (132.43 \text{ mW} + 136.77 \text{ mW}) = 269.21 \text{ mW} = 24.30 \text{ dBm}$$

| | | | | |
|--|---|--|---|--|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 47 of 118 |

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD
 KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 48 of 118 | |

Antenna-1 Power Spectral Density Measurements

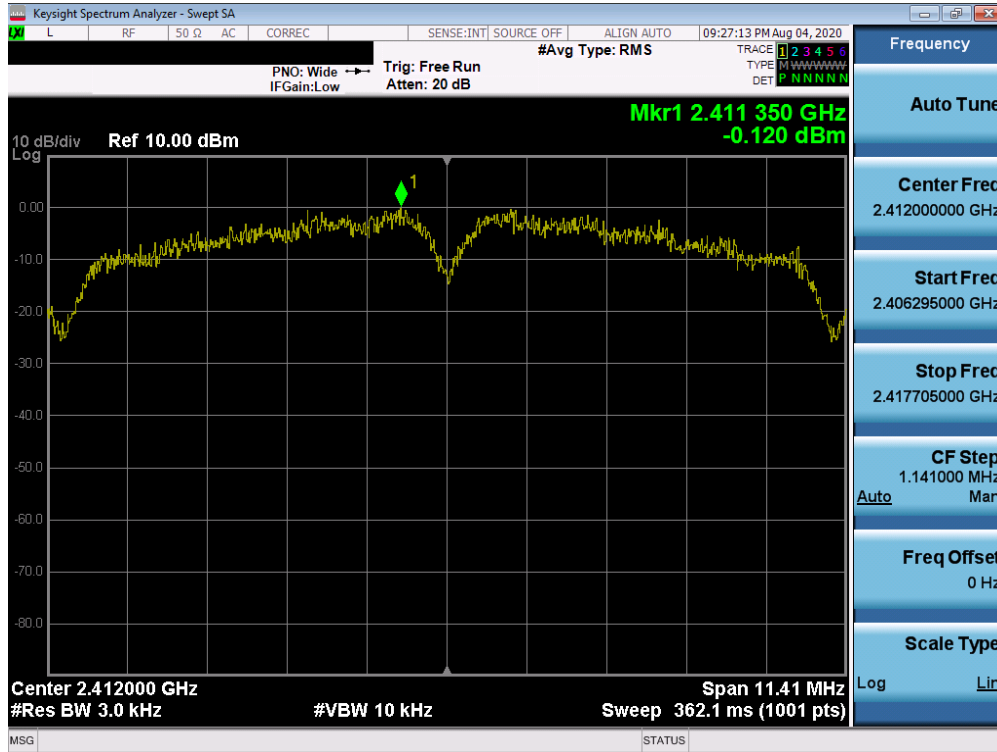


Plot 7-49. Power Spectral Density Plot ANT1 (802.11b 20MHz – Ch. 1)

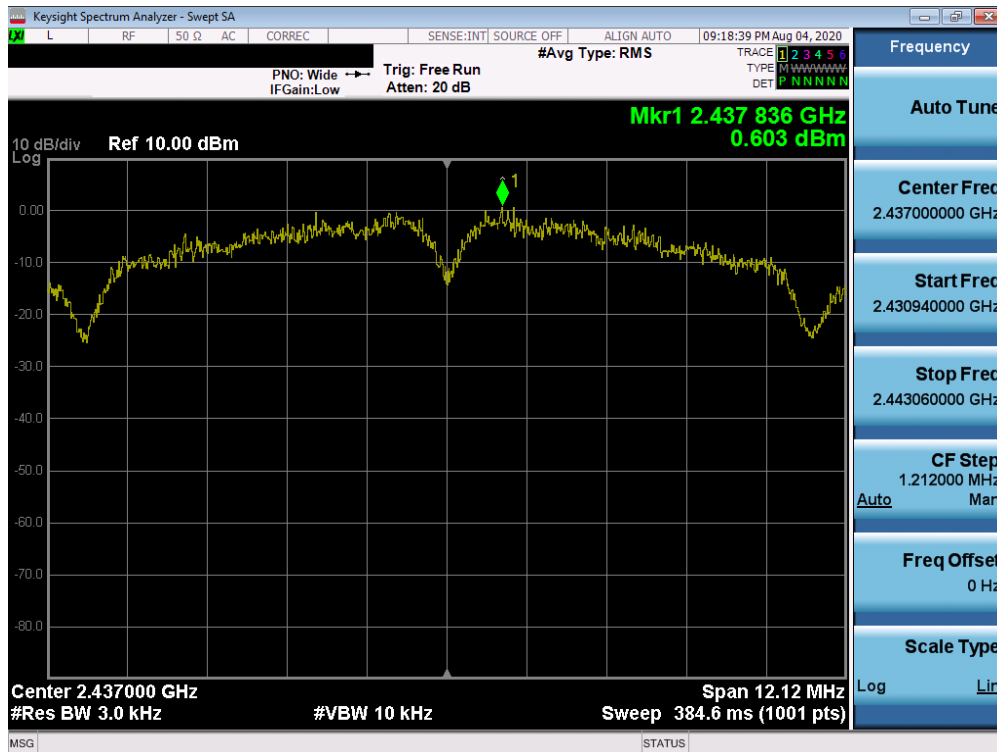


Plot 7-50. Power Spectral Density Plot ANT1 (802.11b 20MHz – Ch. 6)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 49 of 118 |

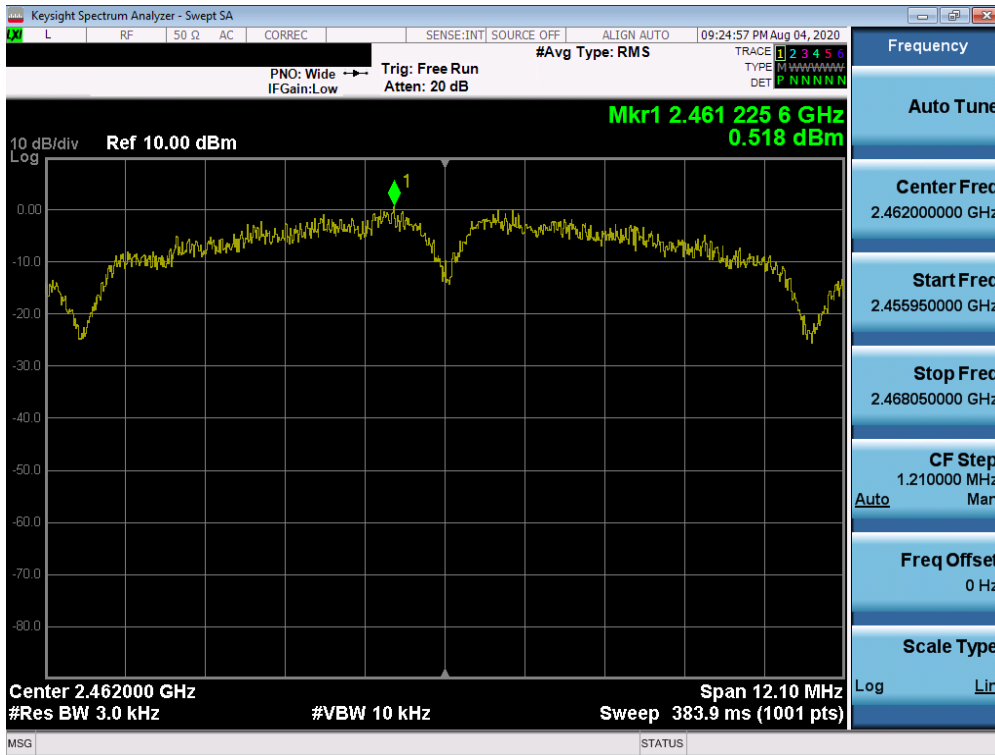


Plot 7-51. Power Spectral Density Plot ANT1 (802.11b 20MHz – Ch. 11)

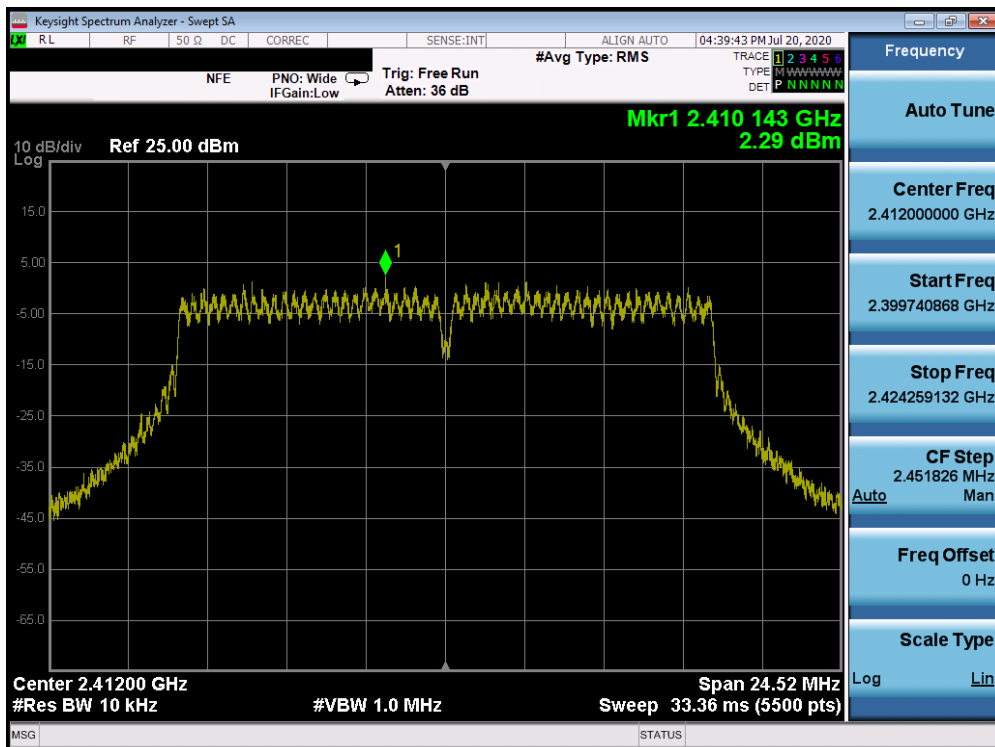


Plot 7-52. Power Spectral Density Plot ANT1 (802.11g 20MHz – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 50 of 118 |

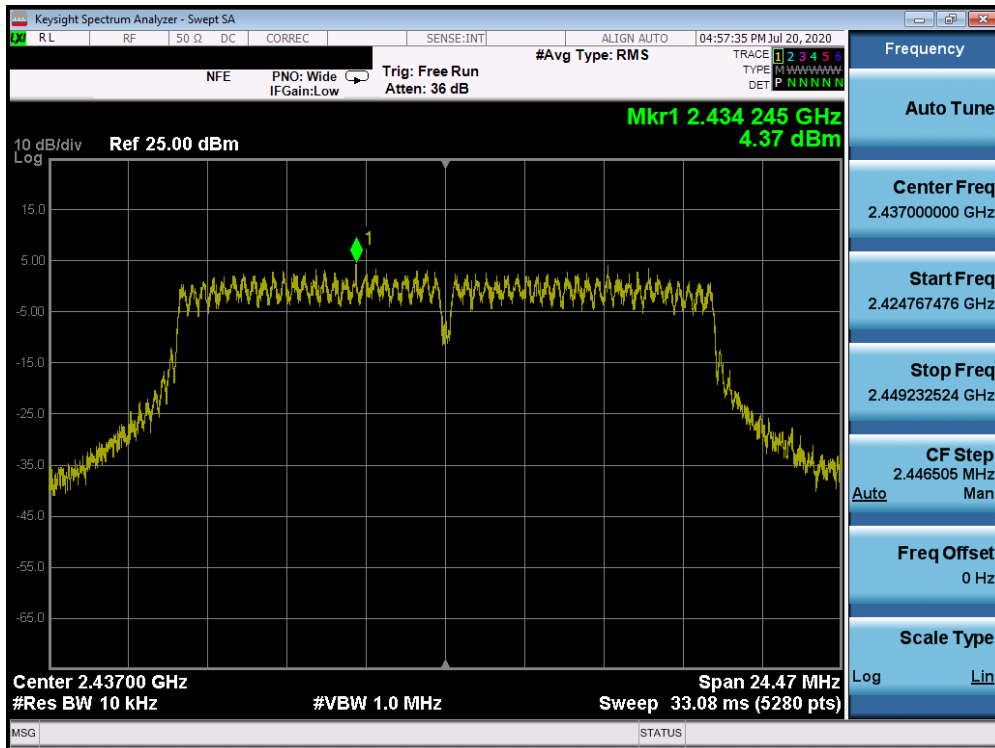


Plot 7-53. Power Spectral Density Plot ANT1 (802.11g 20MHz – Ch. 6)

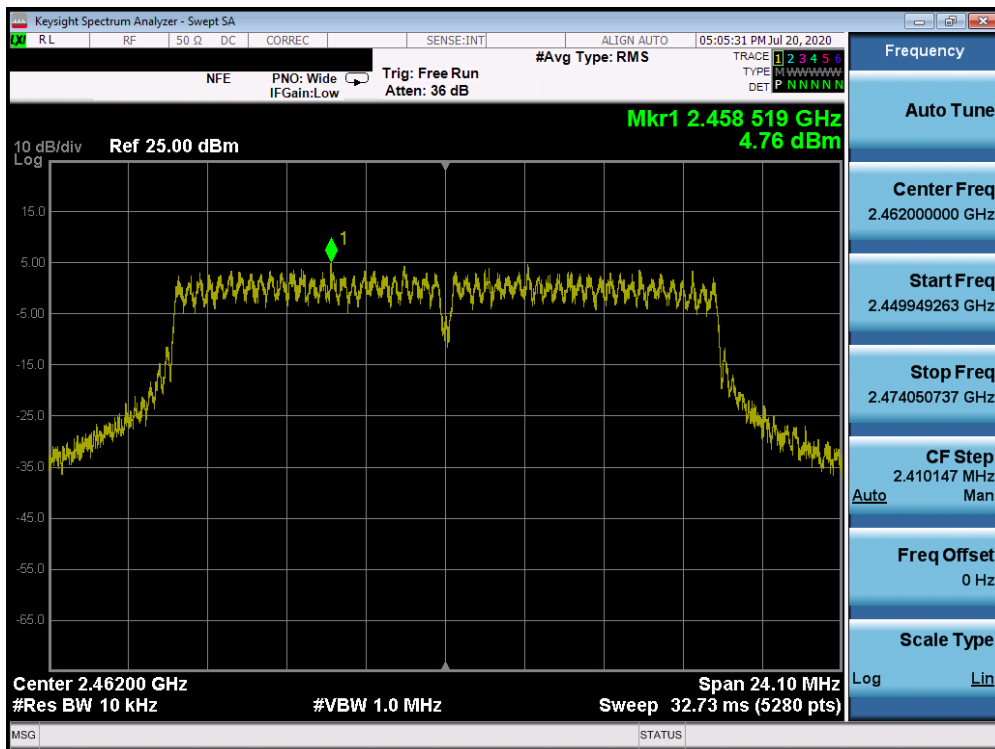


Plot 7-54. Power Spectral Density Plot ANT1 (802.11g 20MHz – Ch. 11)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 51 of 118 |

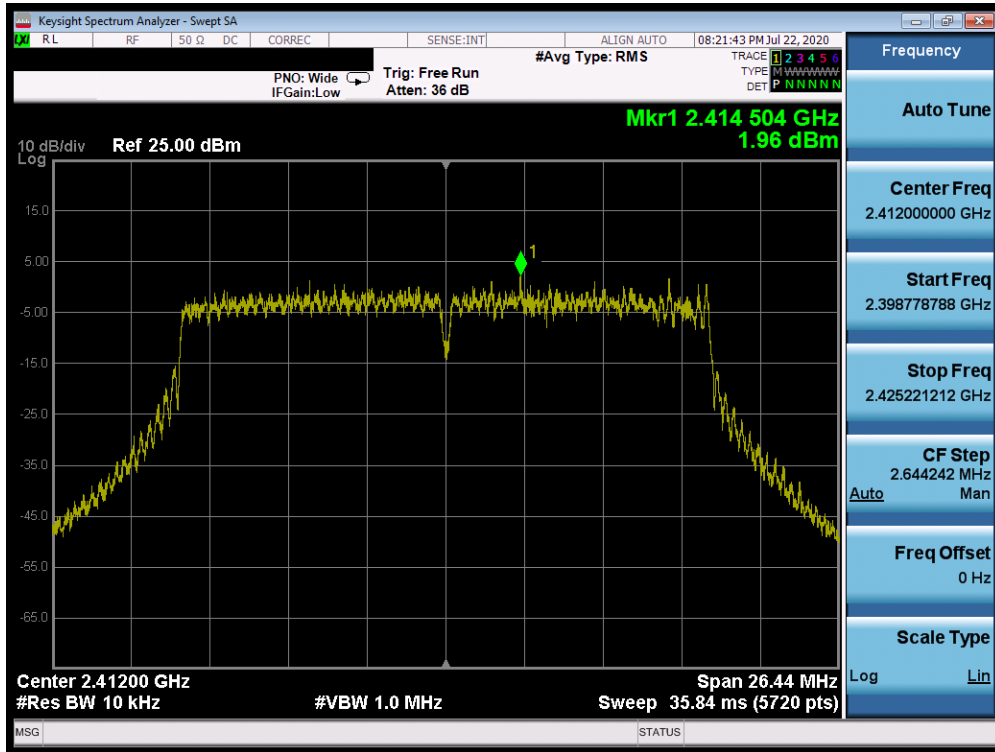


Plot 7-55. Power Spectral Density Plot ANT1 (802.11n 20MHz (2.4GHz) – Ch. 1)

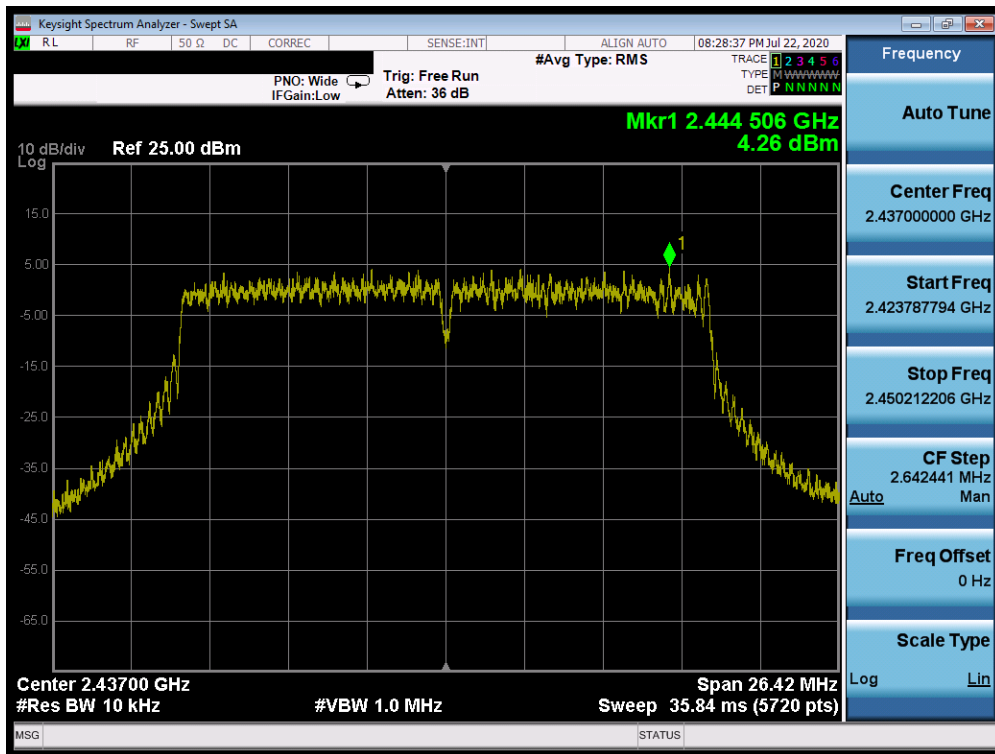


Plot 7-56. Power Spectral Density Plot ANT1 (802.11n 20MHz (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 52 of 118 |

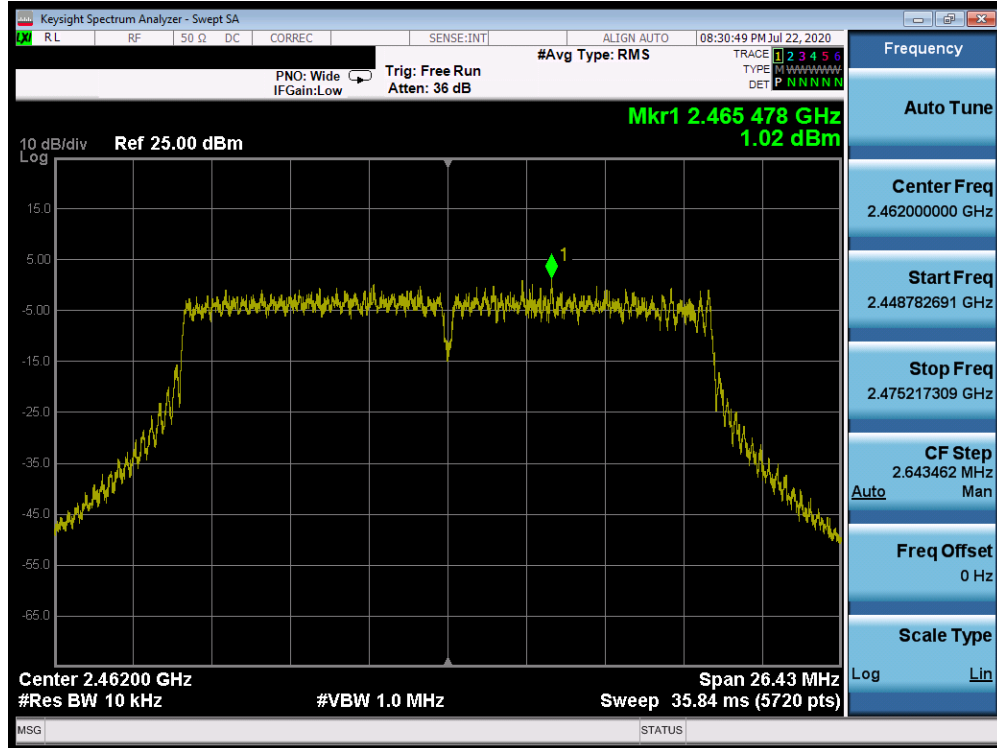


Plot 7-57. Power Spectral Density Plot ANT1 (802.11n 20MHz (2.4GHz) – Ch. 11)

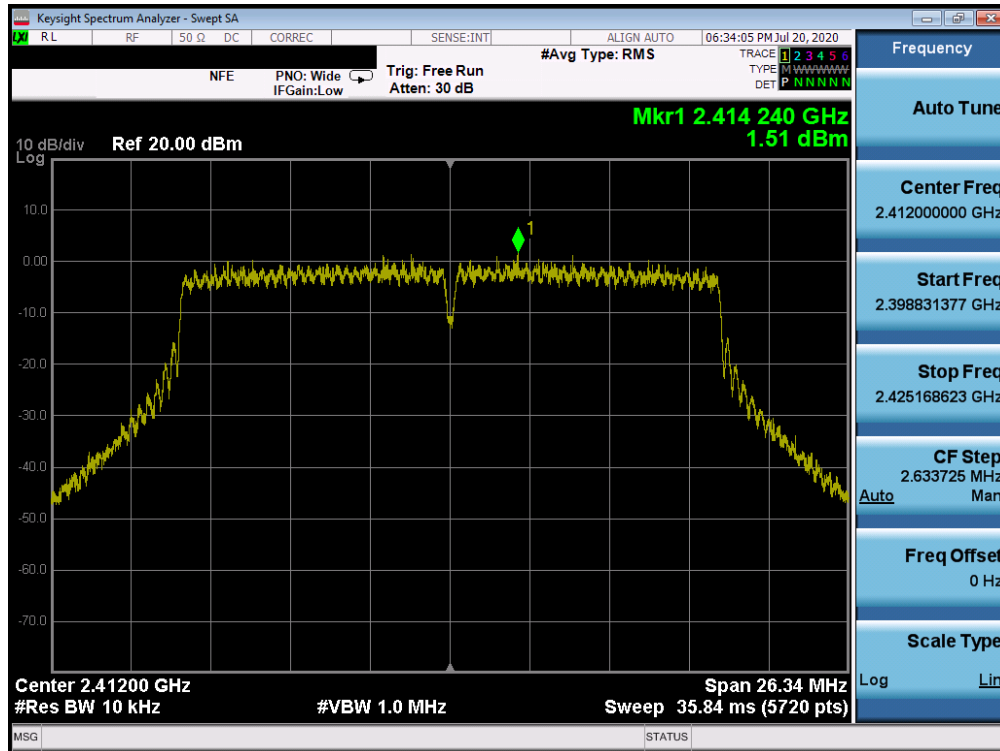


Plot 7-58. Power Spectral Density Plot ANT1 (802.11ac 20MHz (2.4GHz) – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  PCTEST <small>Proud to be part of element</small> | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 53 of 118 |

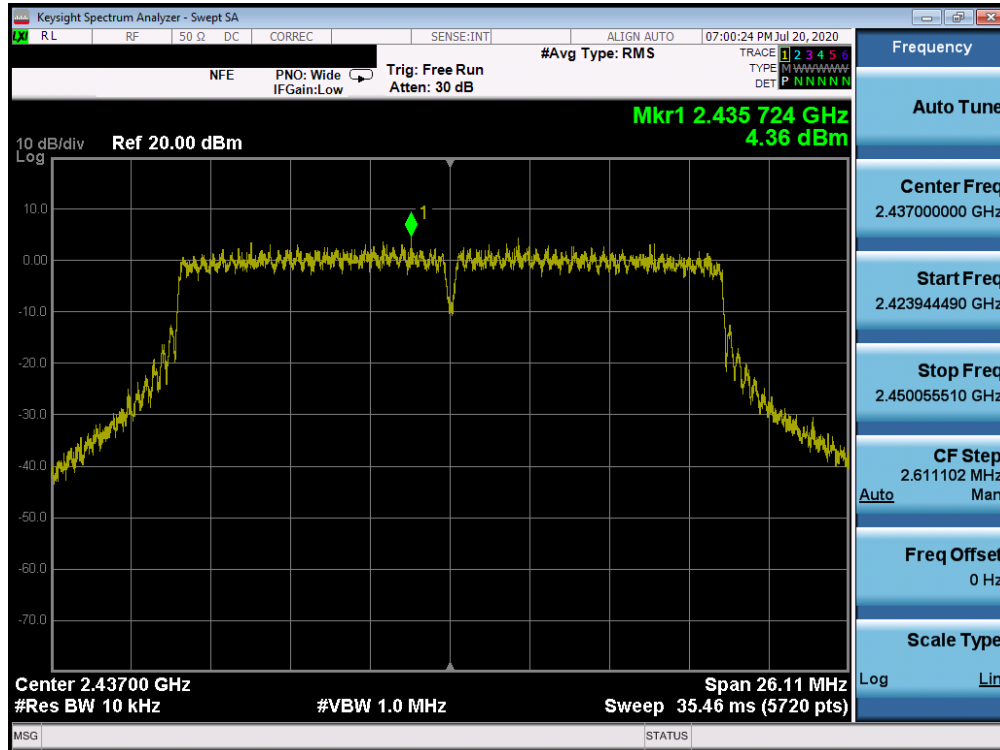


Plot 7-59. Power Spectral Density Plot ANT1 (802.11ac 20MHz (2.4GHz) – Ch. 6)

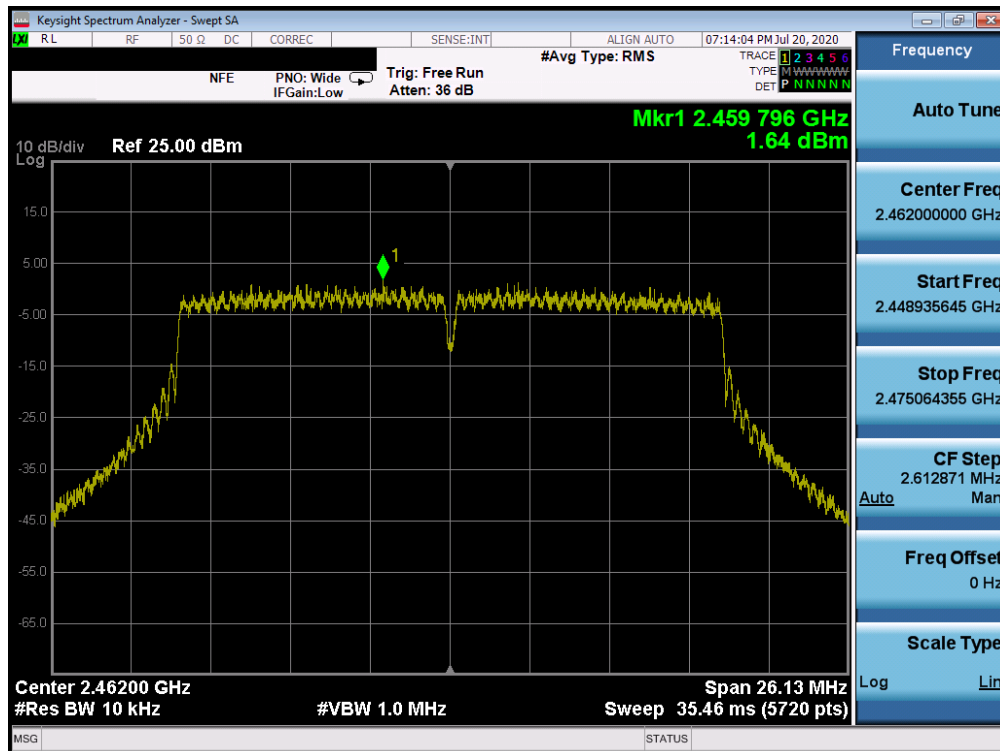


Plot 7-60. Power Spectral Density Plot ANT1 (802.11ac 20MHz (2.4GHz) – Ch. 11)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 54 of 118 |

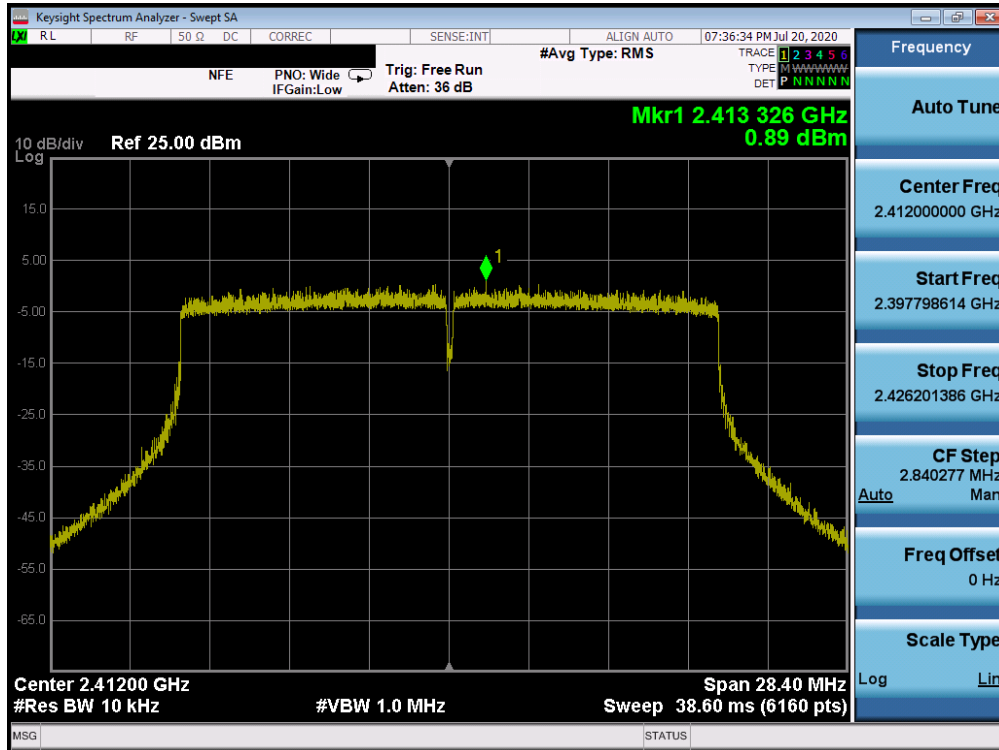


Plot 7-61. Power Spectral Density Plot ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 1)

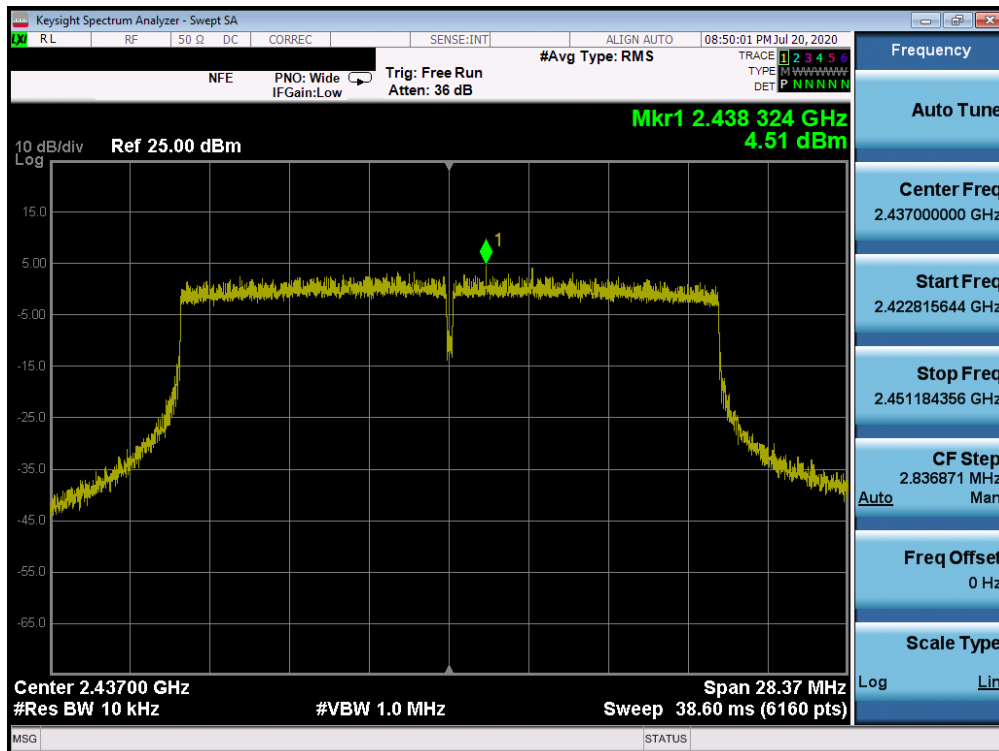


Plot 7-62. Power Spectral Density Plot ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 6)

| | | | | |
|---|--|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 55 of 118 |

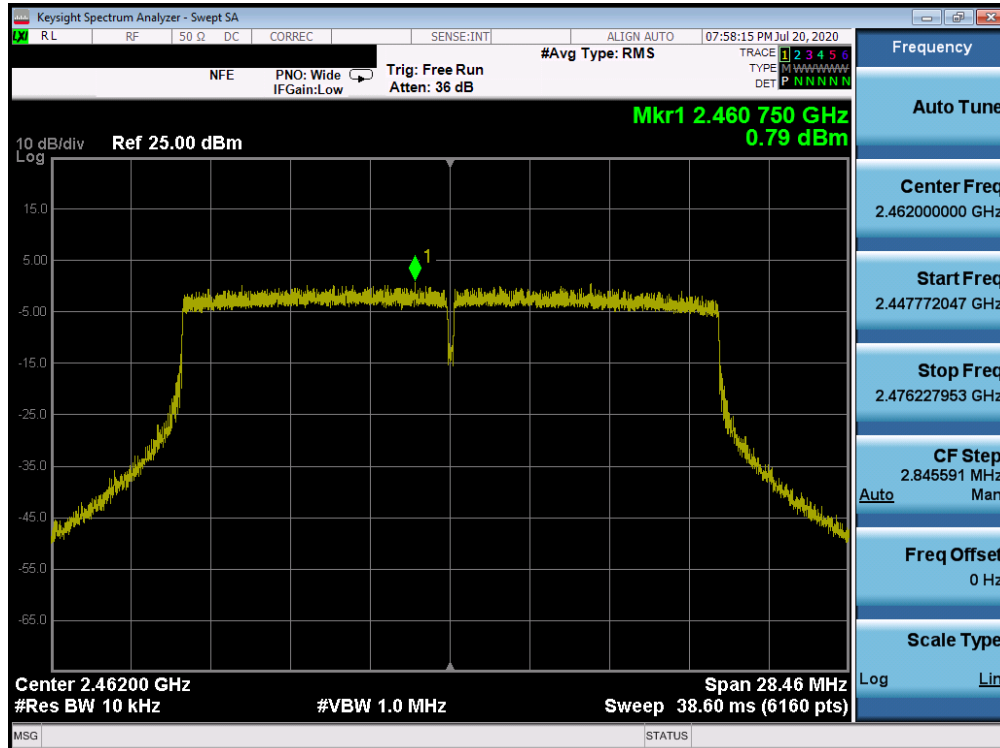


Plot 7-63. Power Spectral Density Plot ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 11)

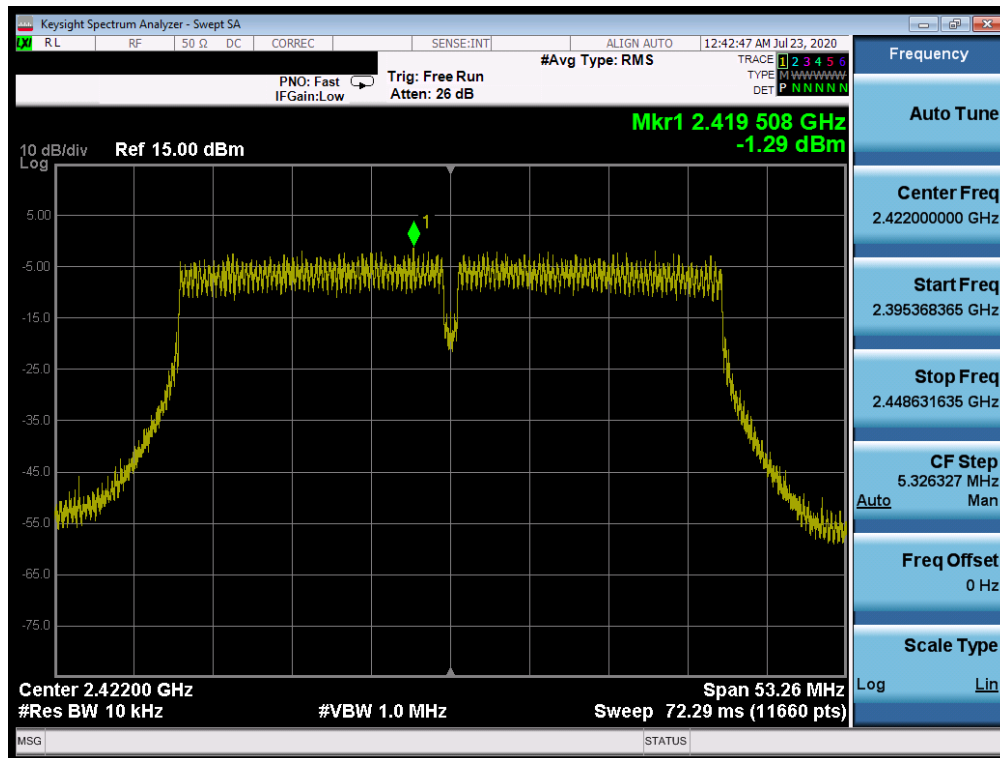


Plot 7-64. Power Spectral Density Plot ANT1 (802.11n 40MHz (2.4GHz) – Ch. 3)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 56 of 118 |

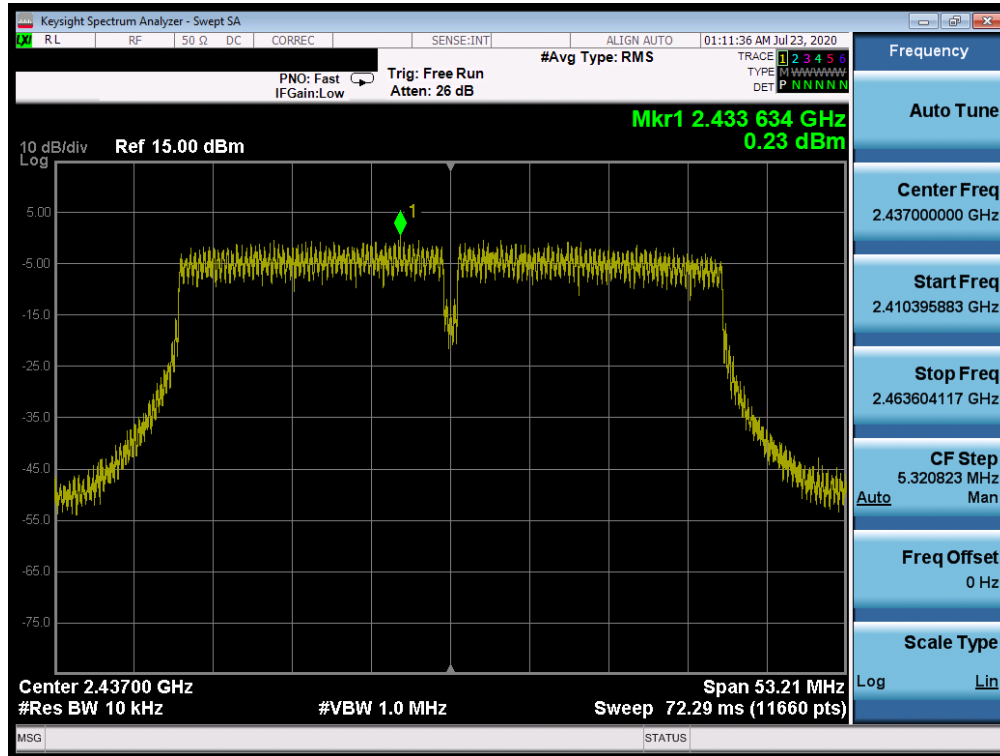


Plot 7-65. Power Spectral Density Plot ANT1 (802.11n 40MHz (2.4GHz) – Ch. 6)

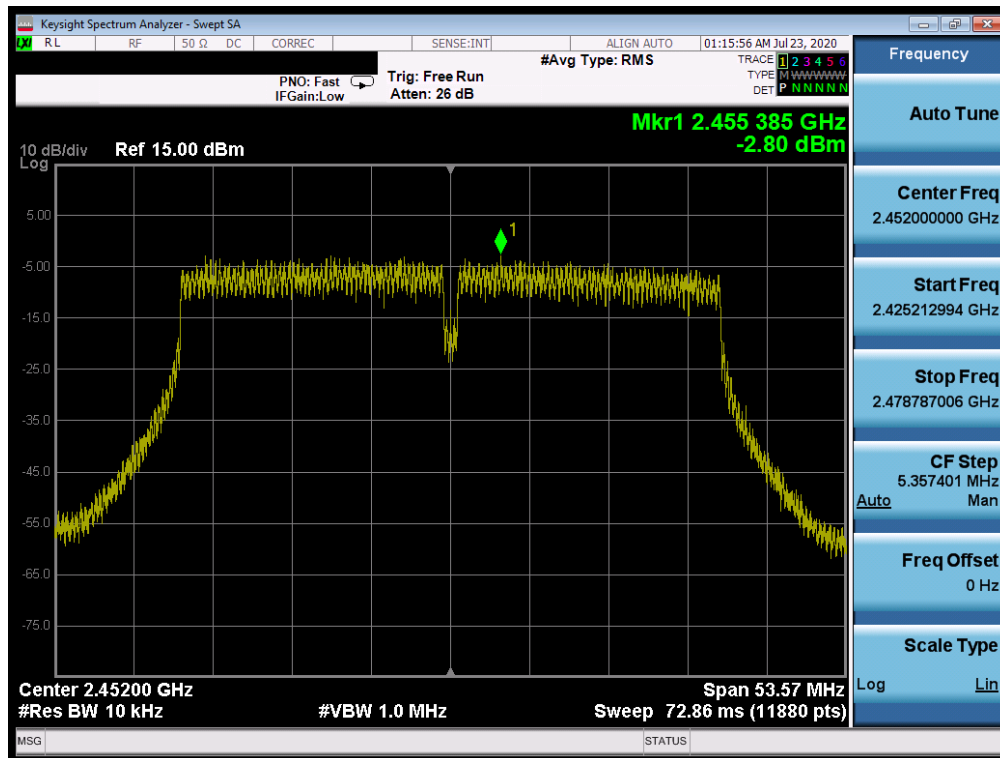


Plot 7-66. Power Spectral Density Plot ANT1 (802.11n 40MHz (2.4GHz) – Ch. 9)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 57 of 118 |

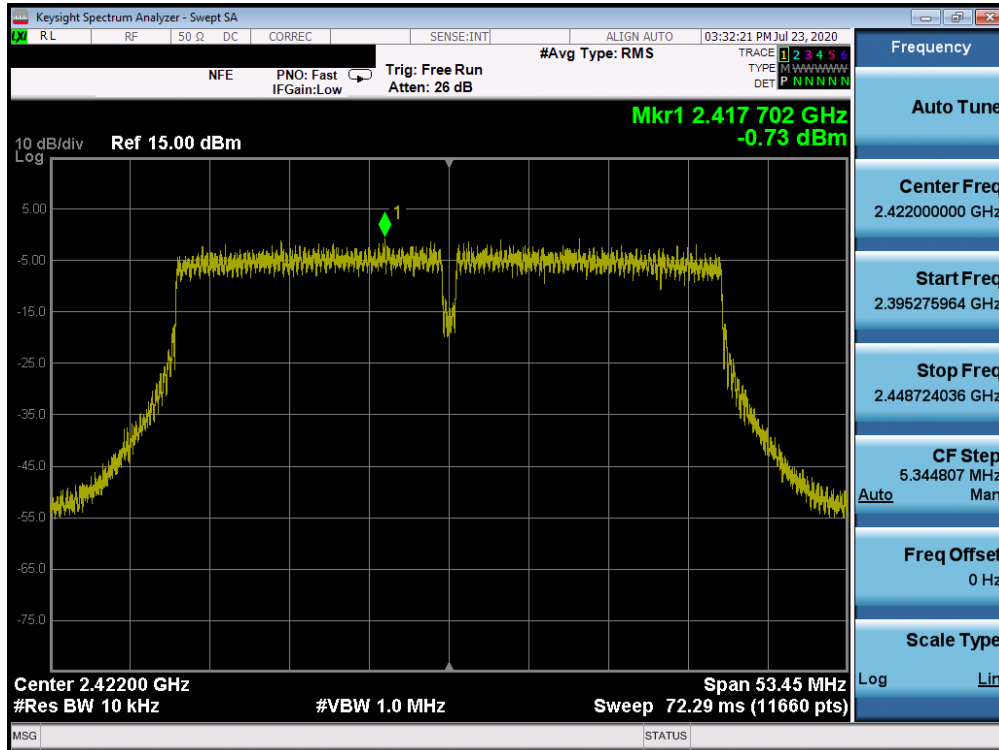


Plot 7-67. Power Spectral Density Plot ANT1 (802.11ac 40MHz (2.4GHz) – Ch. 3)

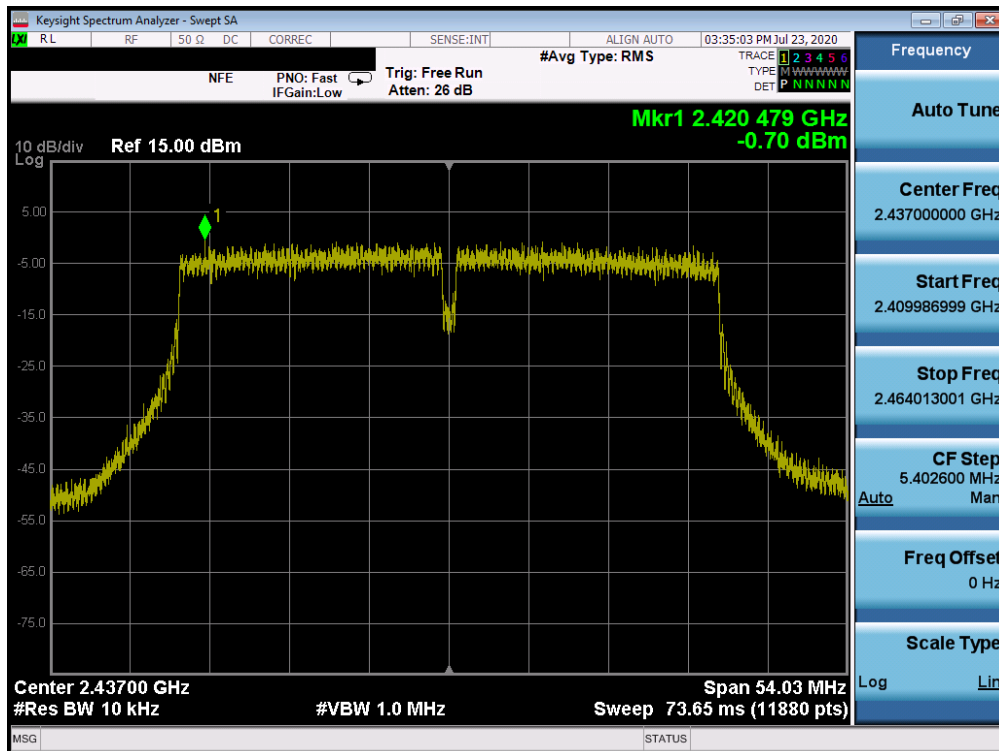


Plot 7-68. Power Spectral Density Plot ANT1 (802.11ac 40MHz (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 58 of 118 |

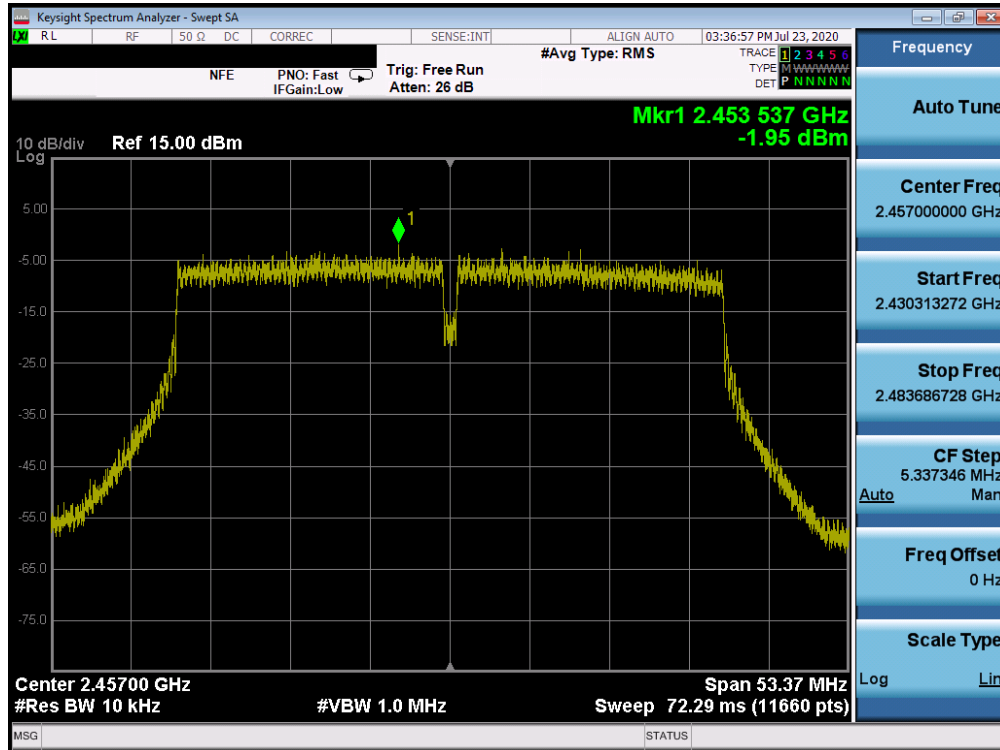


Plot 7-69. Power Spectral Density Plot ANT1 (802.11ac 40MHz (2.4GHz) – Ch. 9)

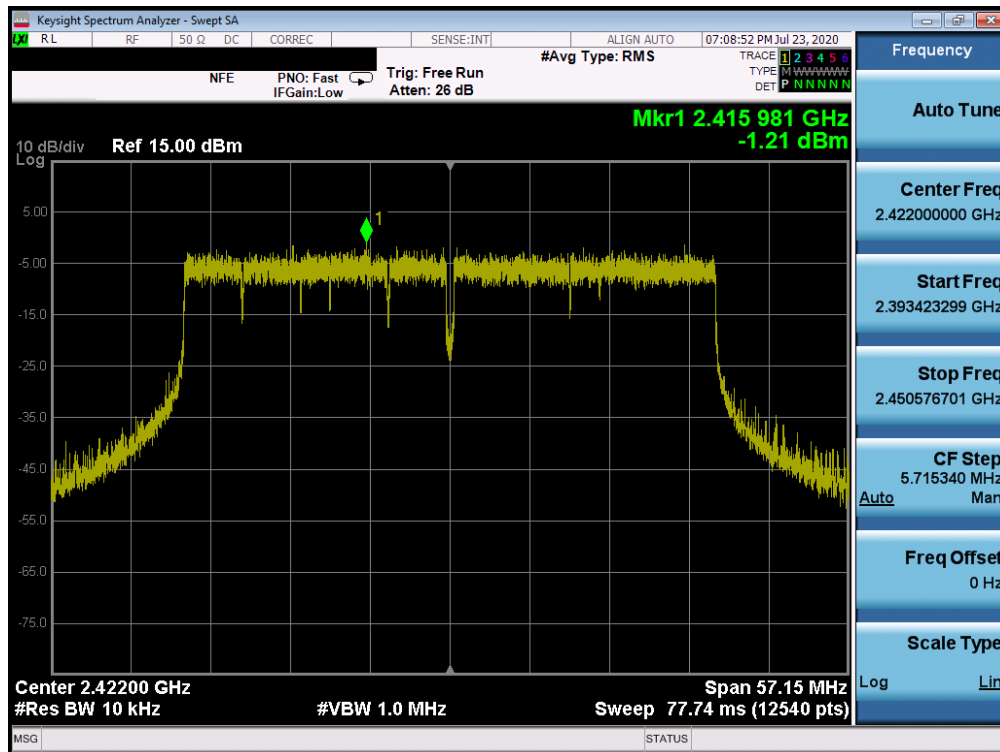


Plot 7-70. Power Spectral Density Plot ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 3)

| | | | | |
|---|--|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 59 of 118 |

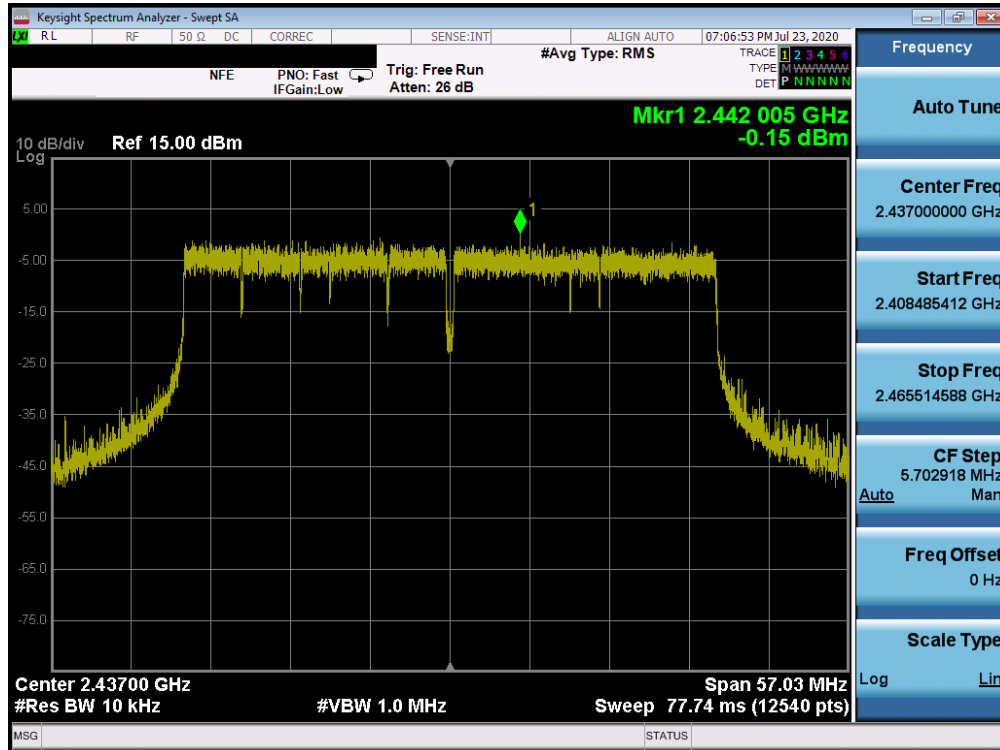


Plot 7-71. Power Spectral Density Plot ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 6)

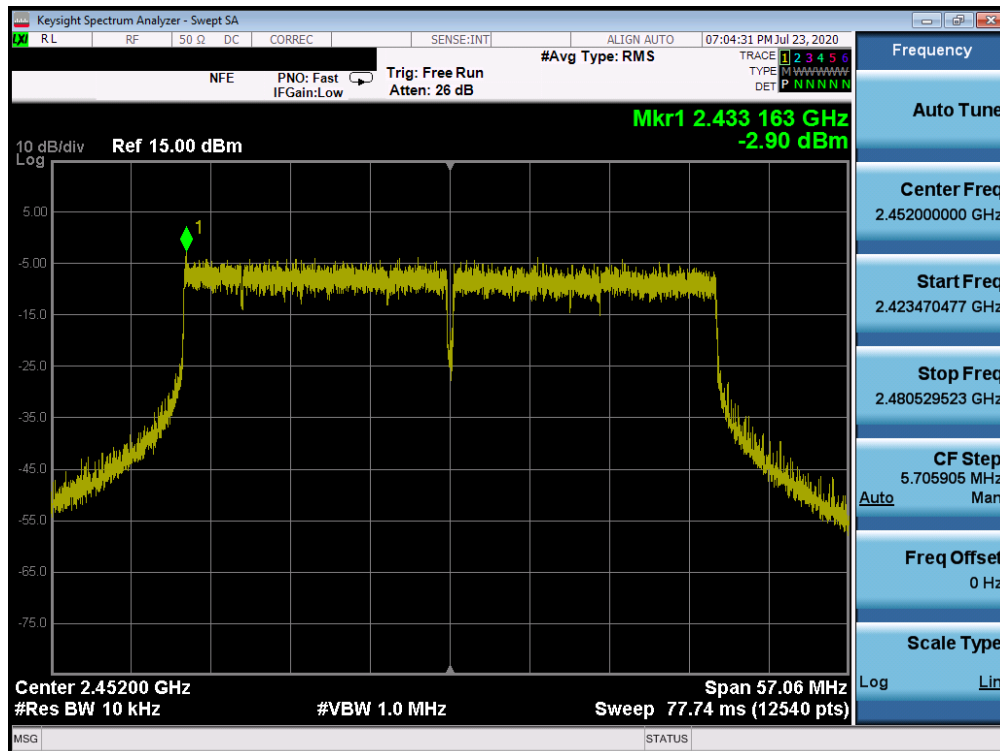


Plot 7-72. Power Spectral Density Plot ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 9)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 60 of 118 |

Antenna-2 Power Spectral Density Measurements

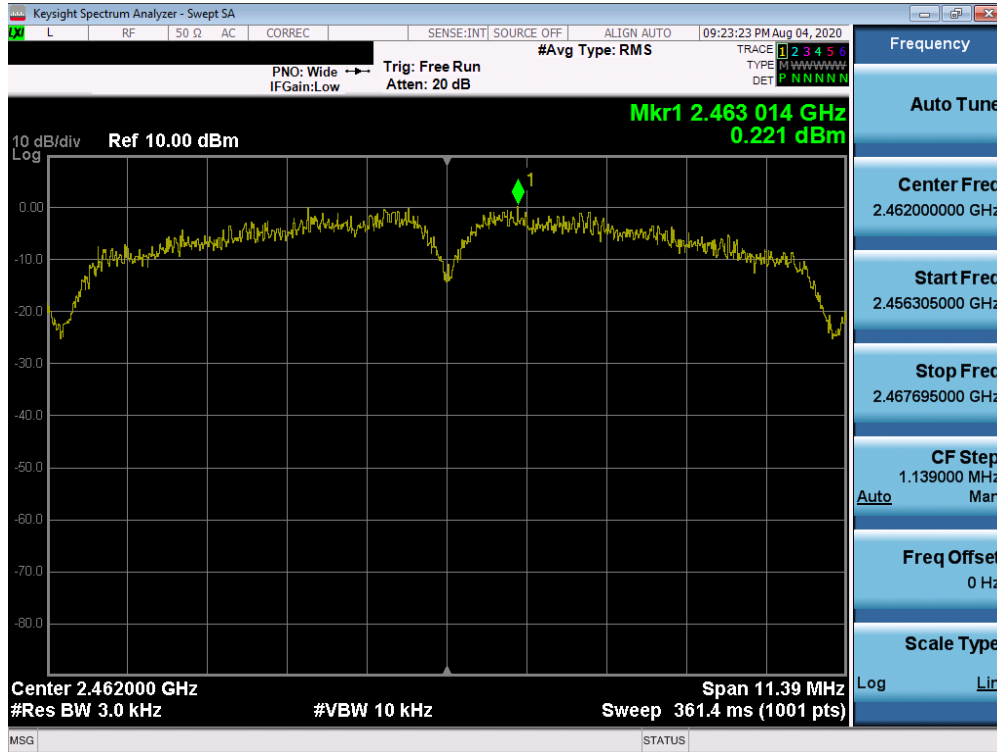


Plot 7-73. Power Spectral Density Plot ANT2 20MHz (802.11b – Ch. 1)

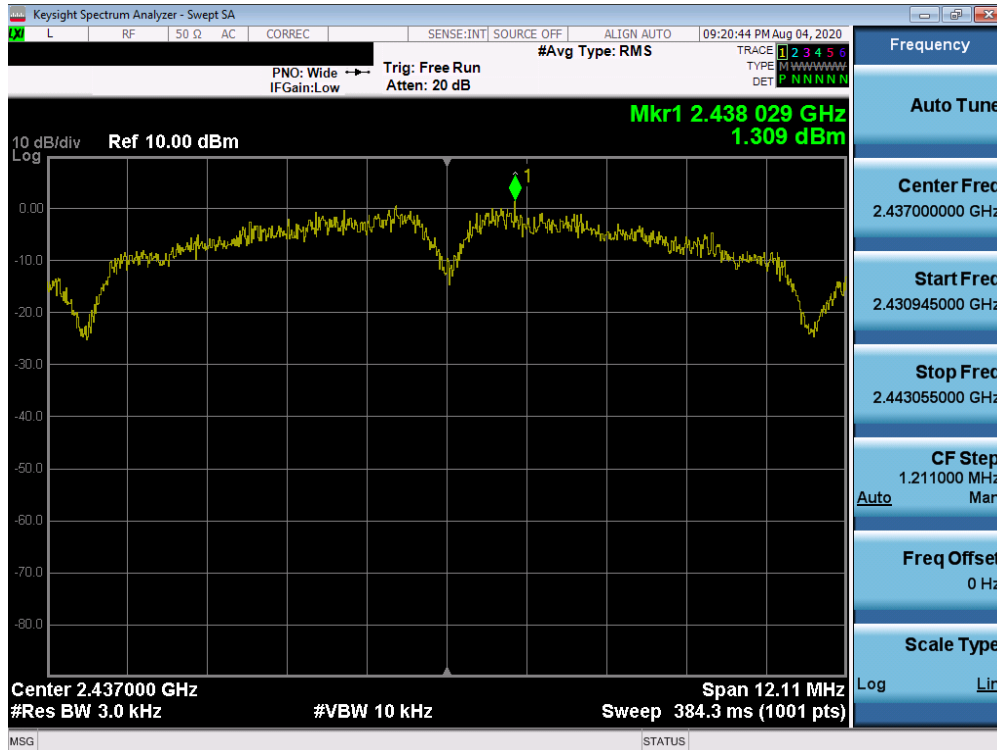


Plot 7-74. Power Spectral Density Plot ANT2 20MHz (802.11b – Ch. 6)

| | | | | |
|---|--|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 61 of 118 |

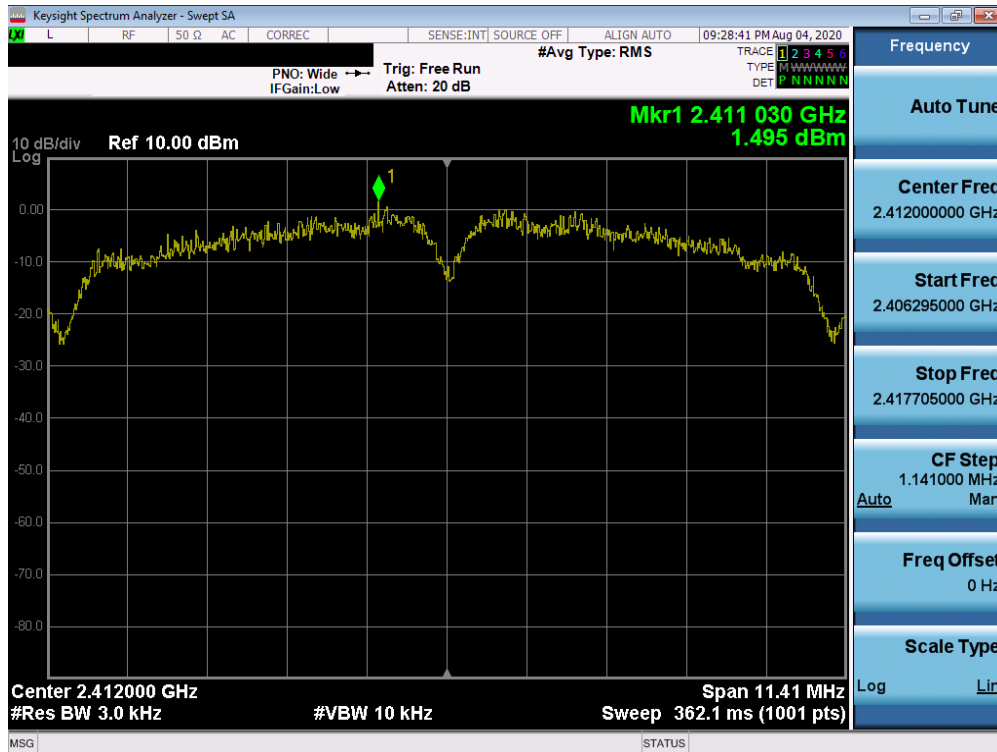


Plot 7-75. Power Spectral Density Plot ANT2 20MHz (802.11b – Ch. 11)

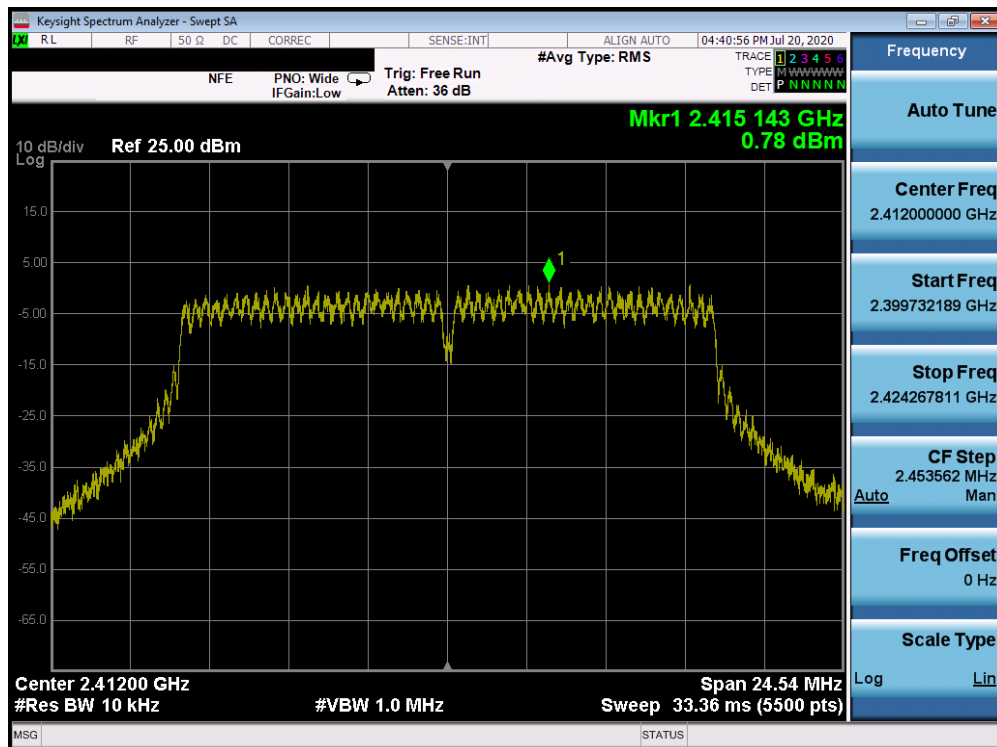


Plot 7-76. Power Spectral Density Plot ANT2 20MHz (802.11g – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 62 of 118 |

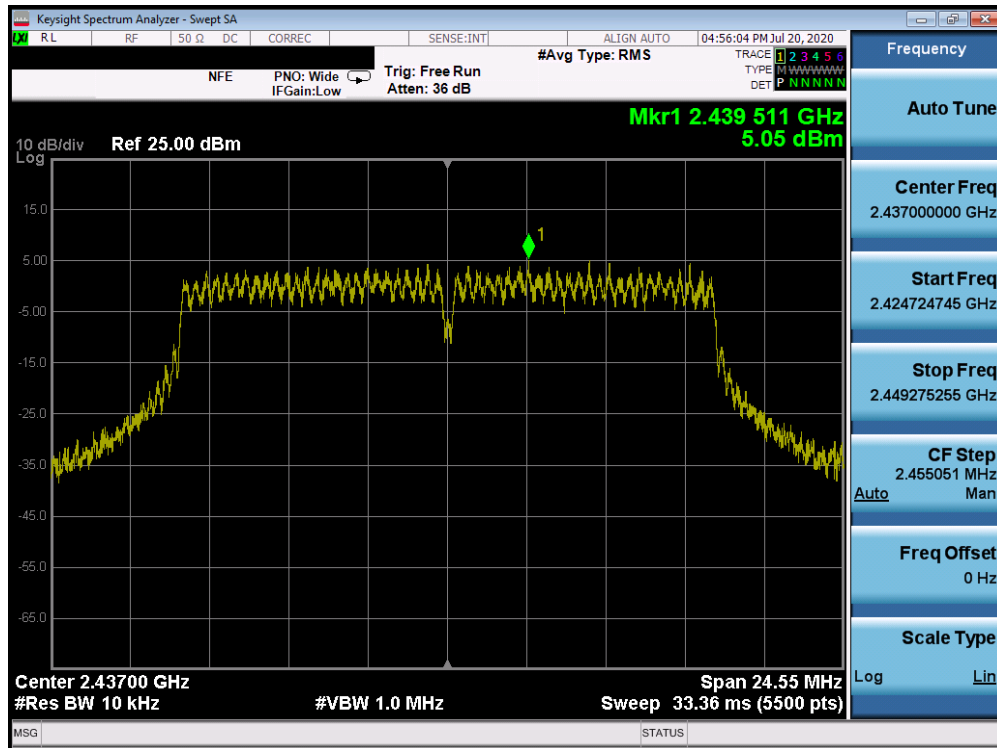


Plot 7-77. Power Spectral Density Plot ANT2 20MHz (802.11g – Ch. 6)

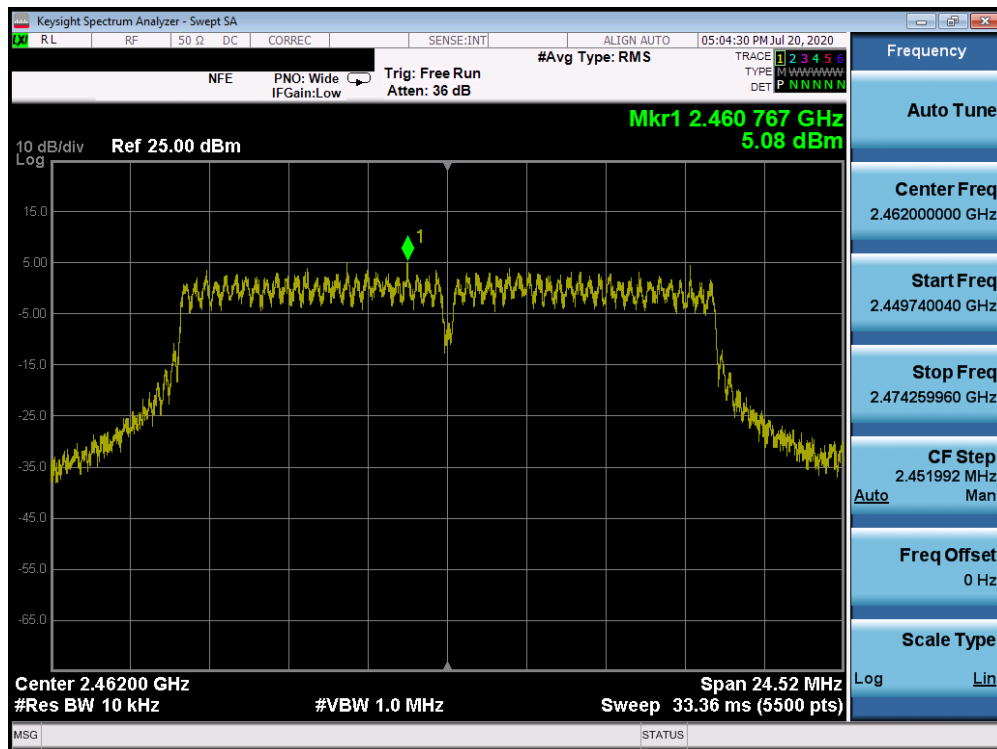


Plot 7-78. Power Spectral Density Plot ANT2 20MHz (802.11g – Ch. 11)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 63 of 118 |

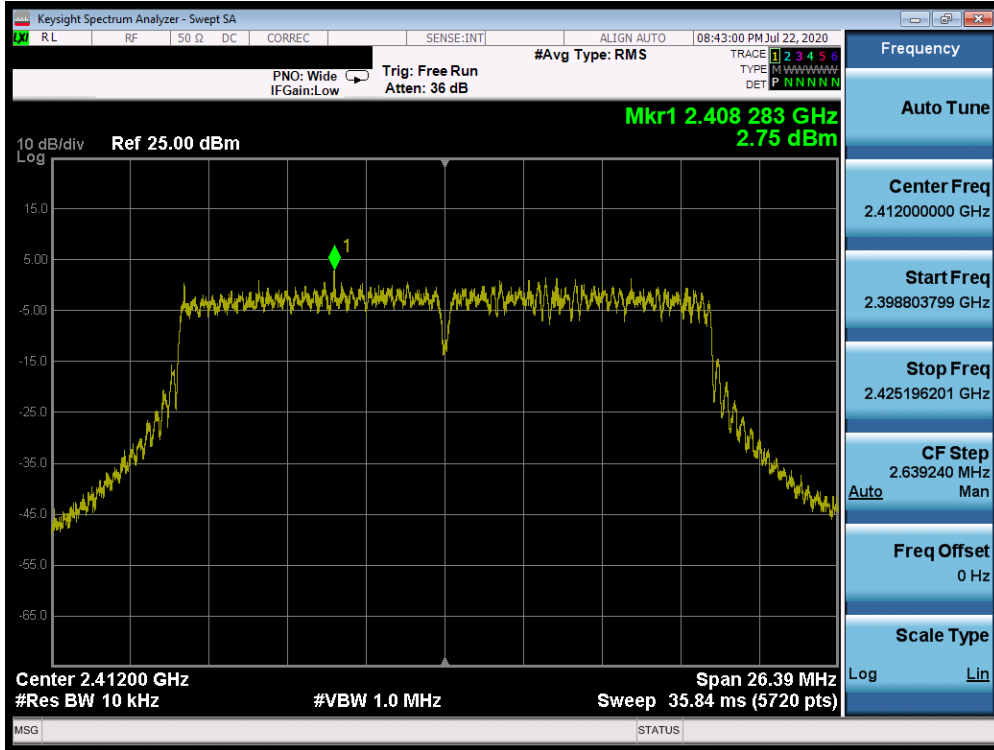


Plot 7-79. Power Spectral Density Plot ANT2 (802.11n 20MHz (2.4GHz) – Ch. 1)

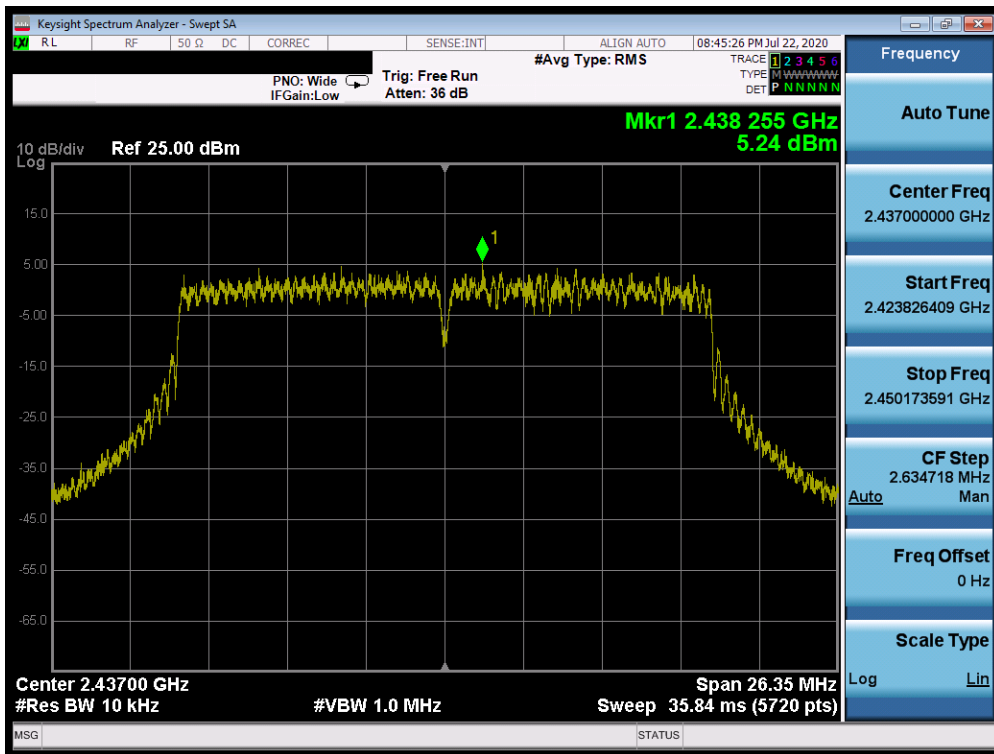


Plot 7-80. Power Spectral Density Plot ANT2 (802.11n 20MHz (2.4GHz) – Ch. 1)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 64 of 118 |

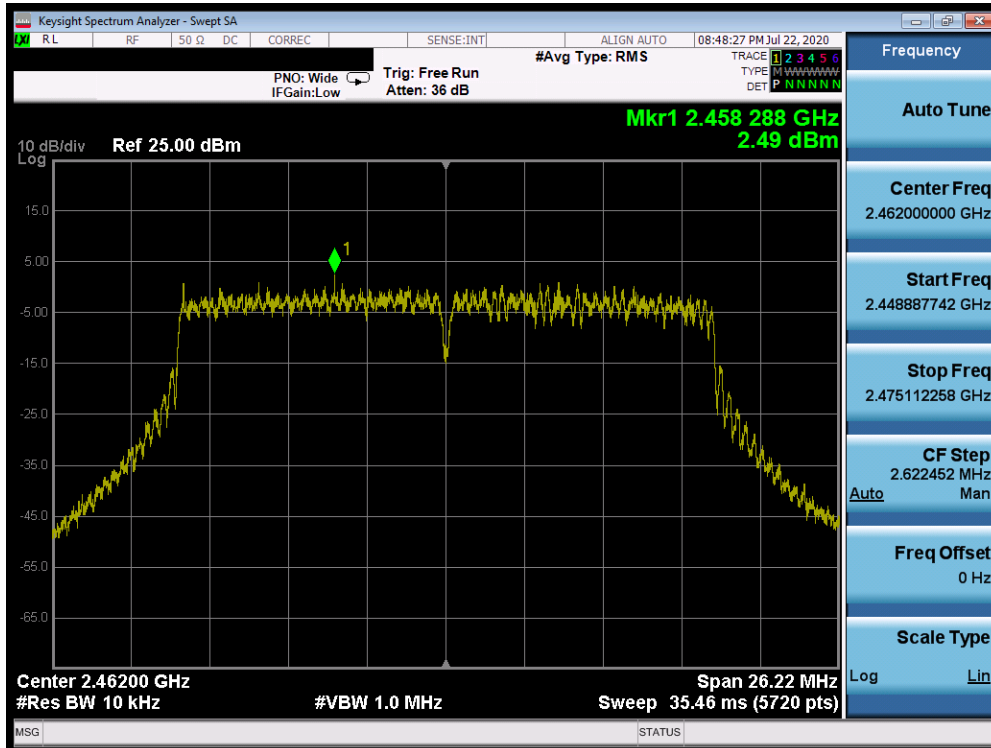


Plot 7-81. Power Spectral Density Plot ANT2 (802.11n 20MHz (2.4GHz) – Ch. 11)

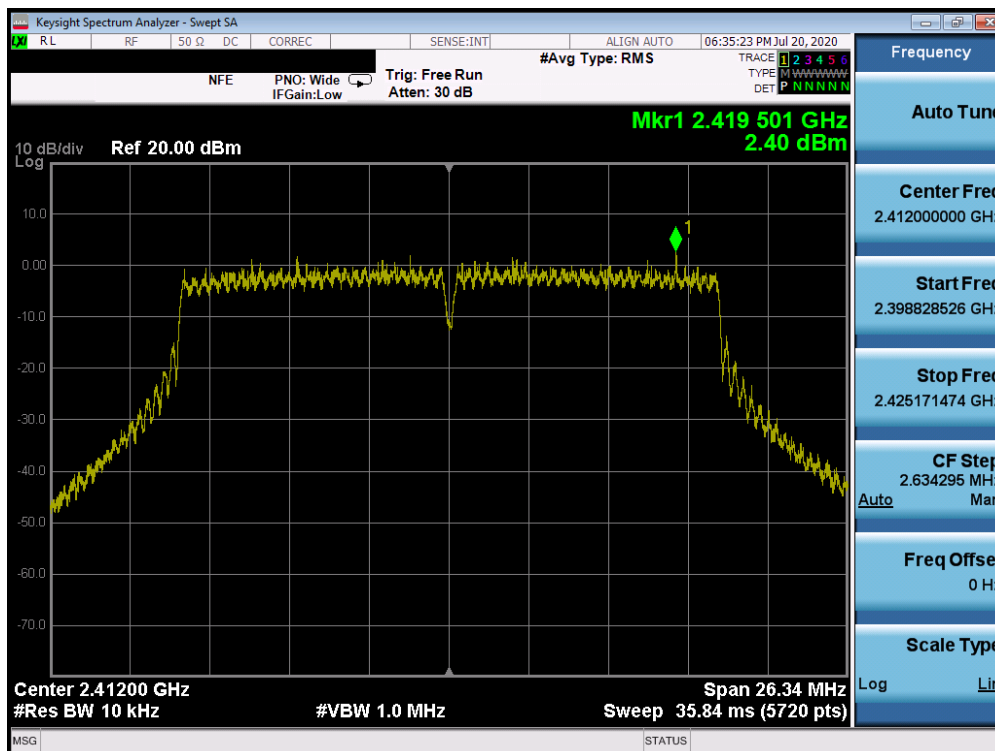


Plot 7-82. Power Spectral Density Plot ANT2 (802.11ac 20MHz (2.4GHz) – Ch. 1)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 65 of 118 |

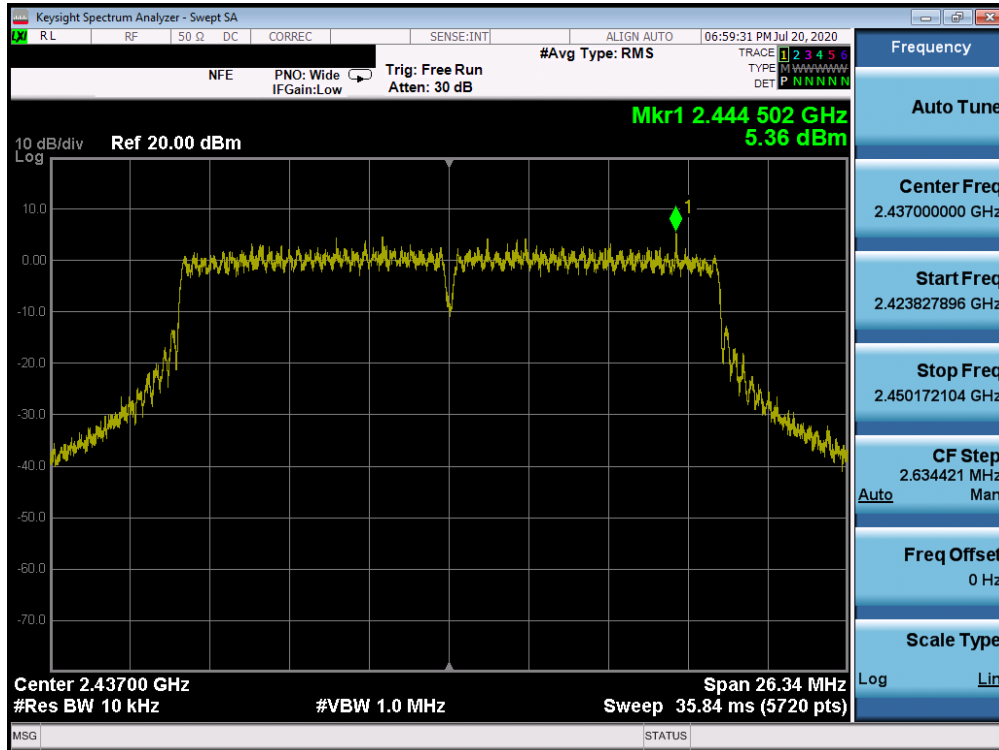


Plot 7-83. Power Spectral Density Plot ANT2 (802.11ac 20MHz (2.4GHz) – Ch. 6)

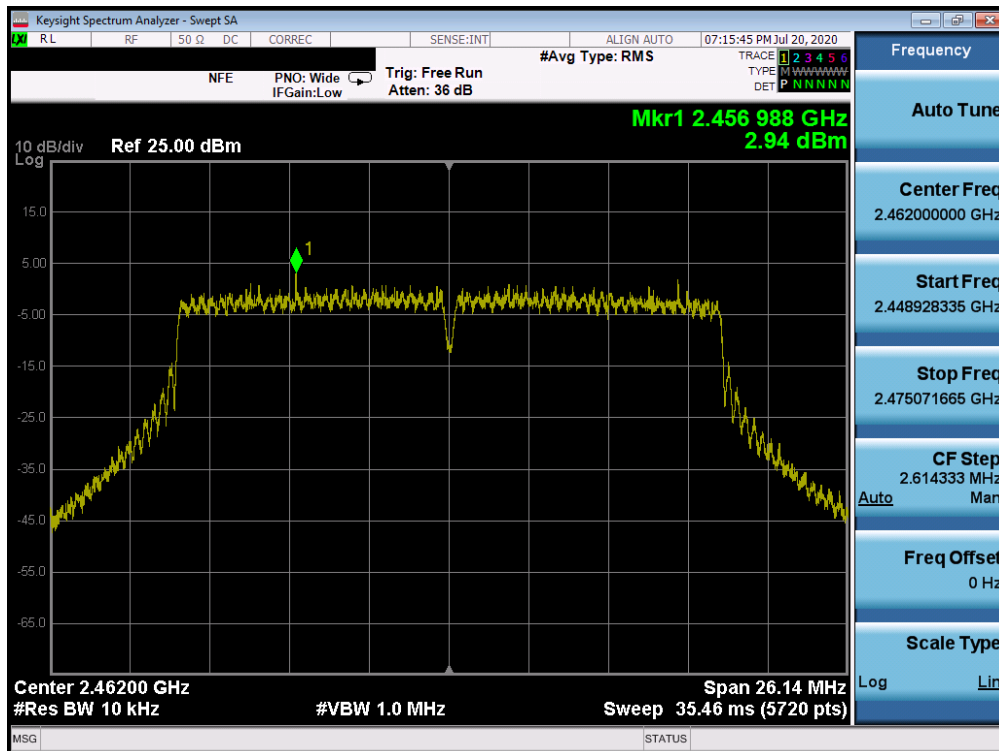


Plot 7-84. Power Spectral Density Plot ANT2 (802.11ac 20MHz (2.4GHz) – Ch. 11)

| | | | | |
|---|--|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 66 of 118 |

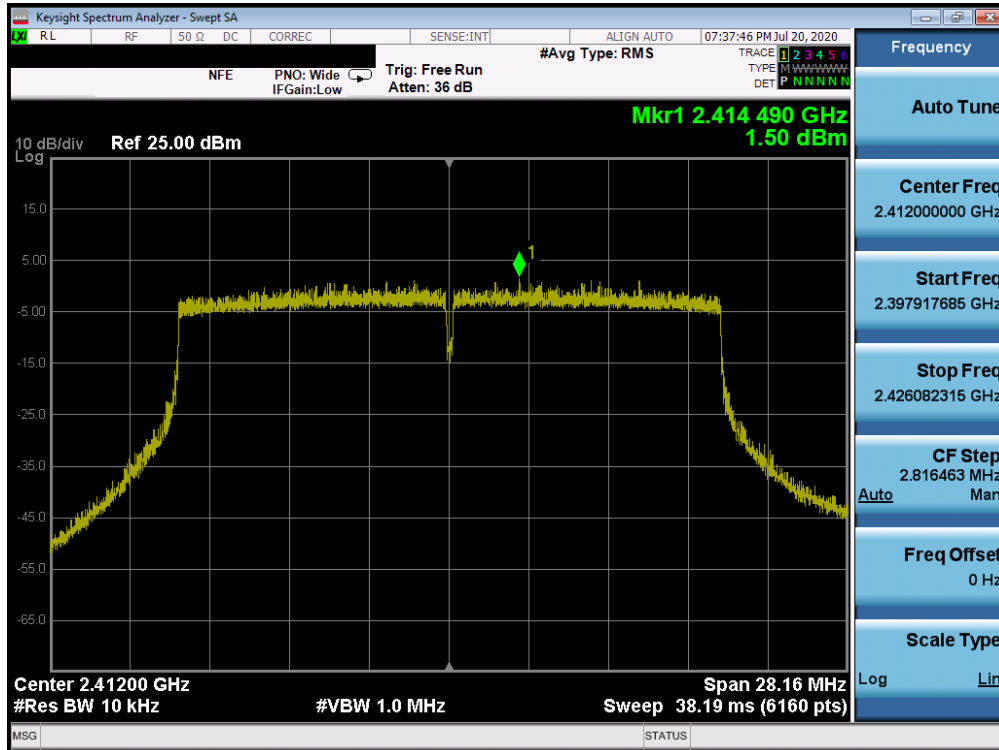


Plot 7-85. Power Spectral Density Plot ANT2 (802.11x 20MHz (2.4GHz) – Ch. 1)

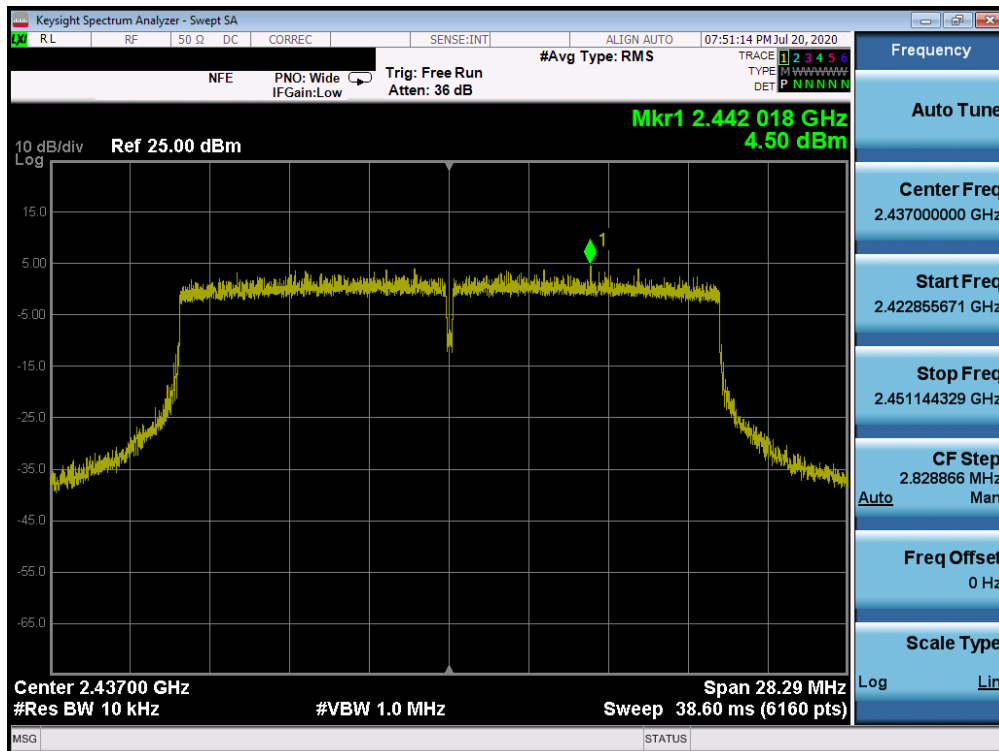


Plot 7-86. Power Spectral Density Plot ANT2 (802.11x 20MHz (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 67 of 118 |

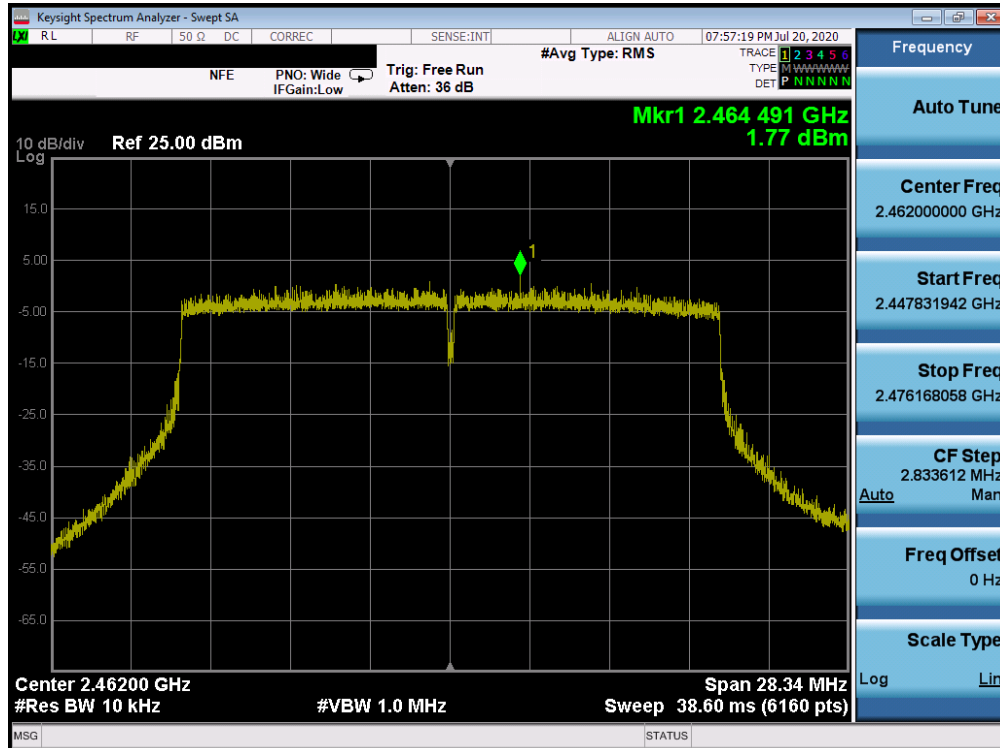


Plot 7-87. Power Spectral Density Plot ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 11)

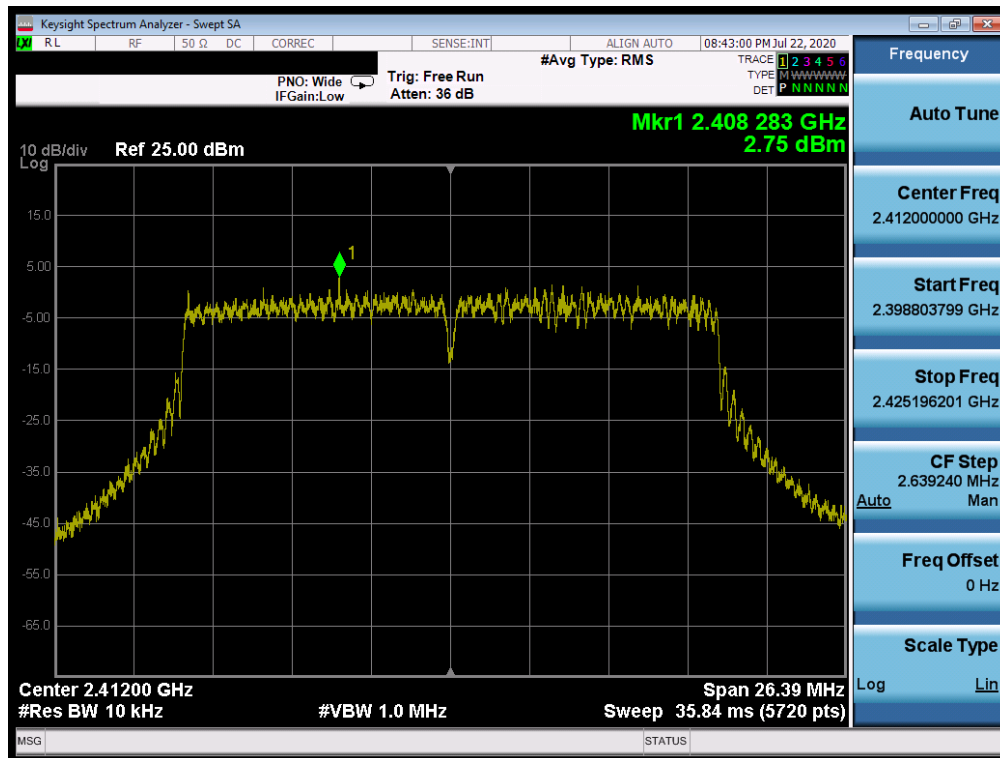


Plot 7-88. Power Spectral Density Plot ANT2 (802.11n 40MHz (2.4GHz) – Ch. 3)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 68 of 118 |

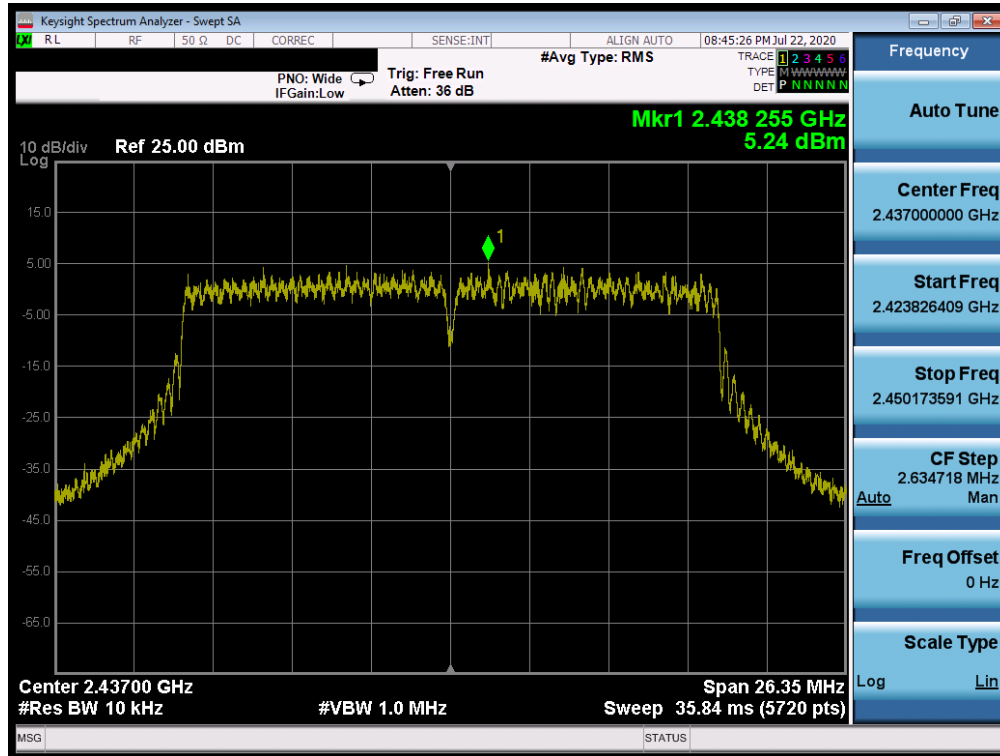


Plot 7-89. Power Spectral Density Plot ANT2 (802.11n 40MHz (2.4GHz) – Ch. 6)

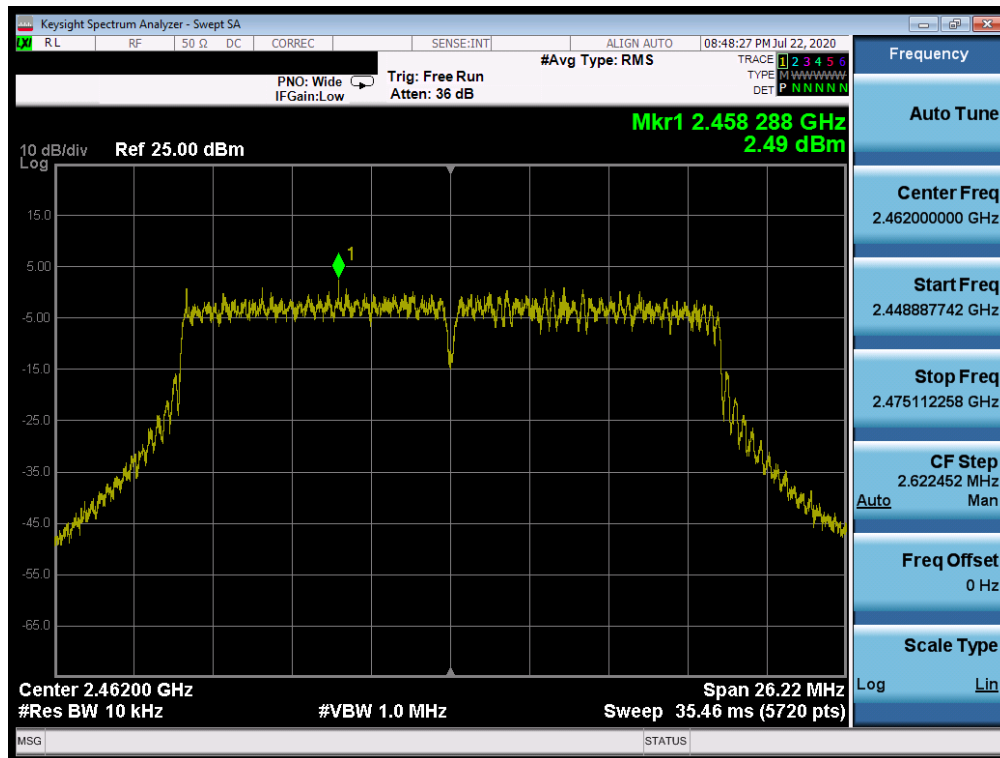


Plot 7-90. Power Spectral Density Plot ANT2 (802.11n 40MHz (2.4GHz) – Ch. 9)

| | | | | |
|---|--|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 69 of 118 |

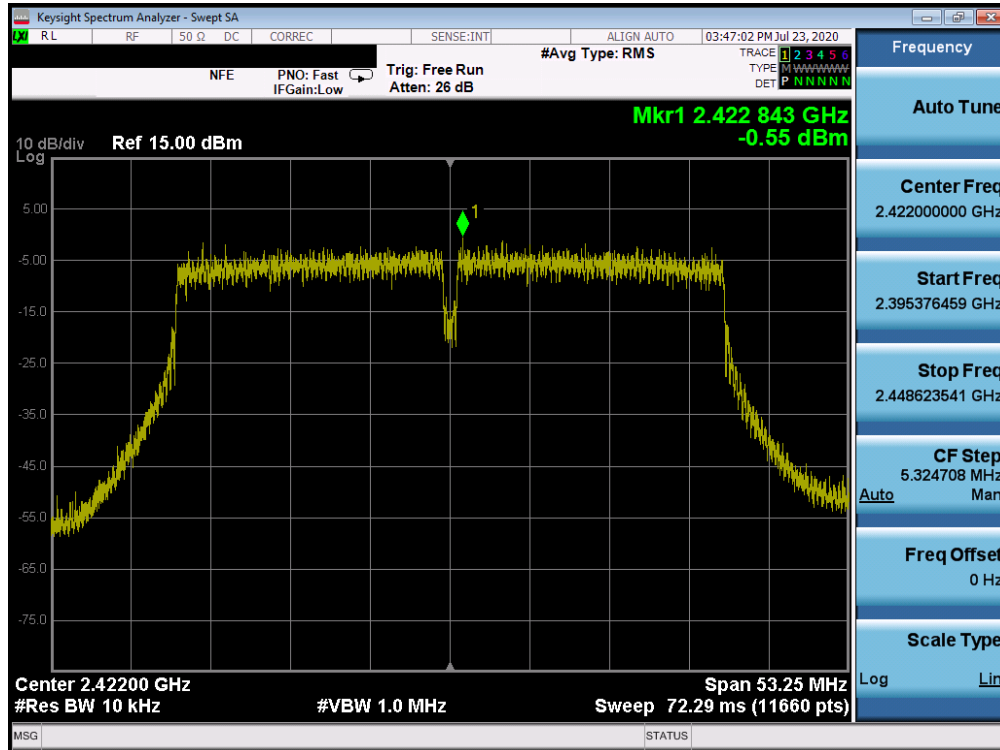


Plot 7-91. Power Spectral Density Plot ANT2 (802.11ac 40MHz (2.4GHz) – Ch. 3)

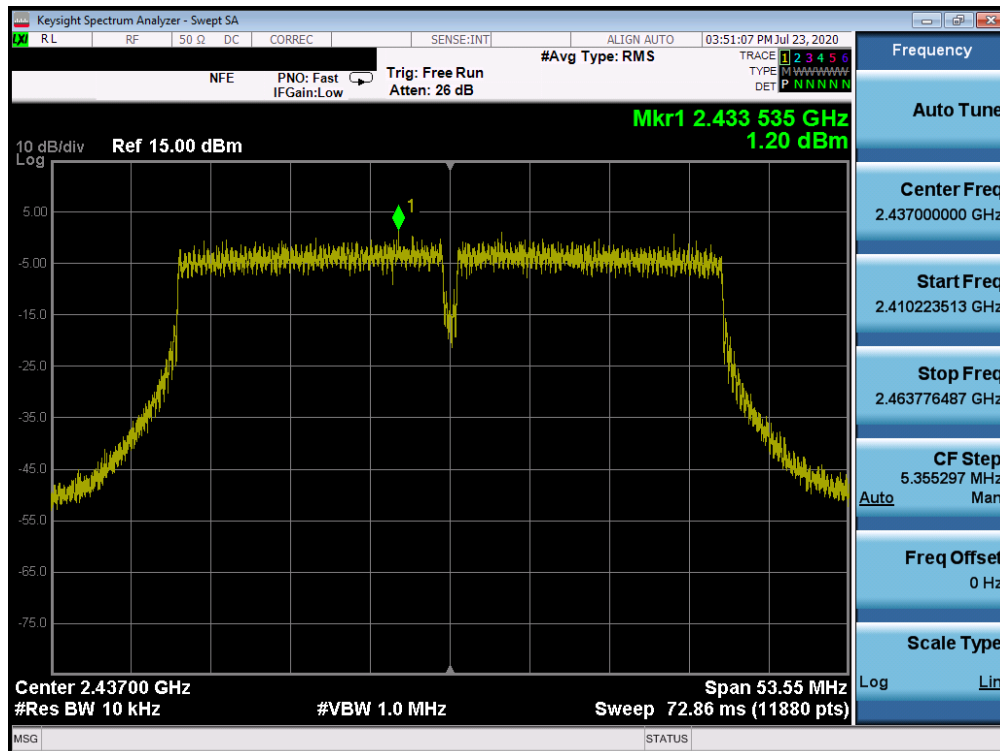


Plot 7-92. Power Spectral Density Plot ANT2 (802.11ac 40MHz (2.4GHz) – Ch. 6)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 70 of 118 |

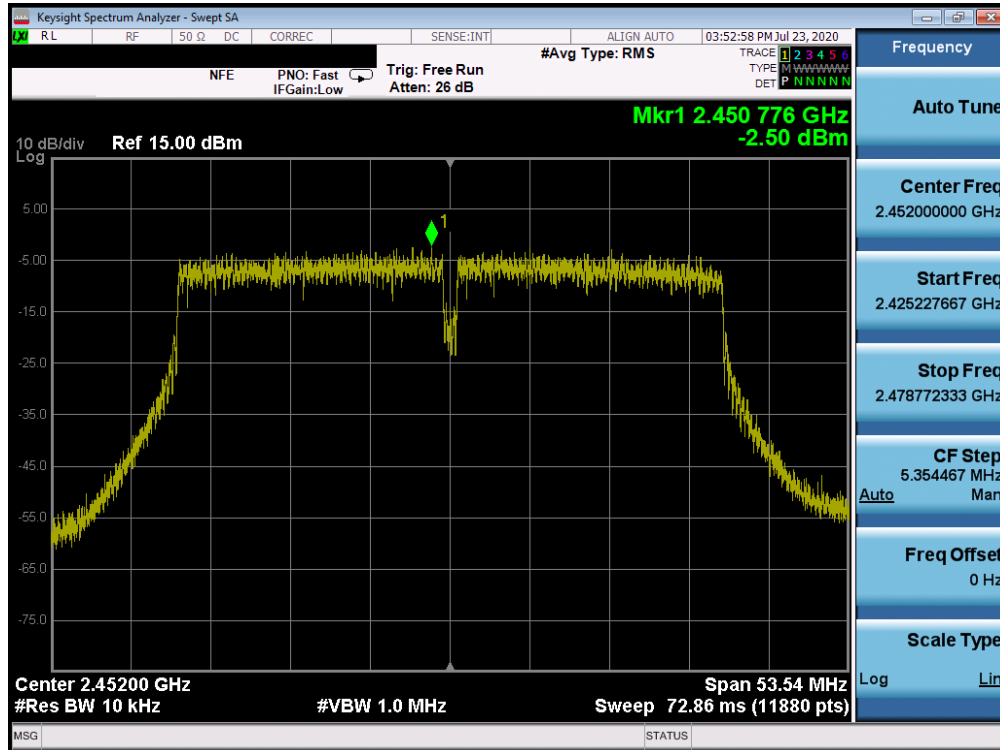


Plot 7-93. Power Spectral Density Plot ANT2 (802.11ac 40MHz (2.4GHz) – Ch. 9)

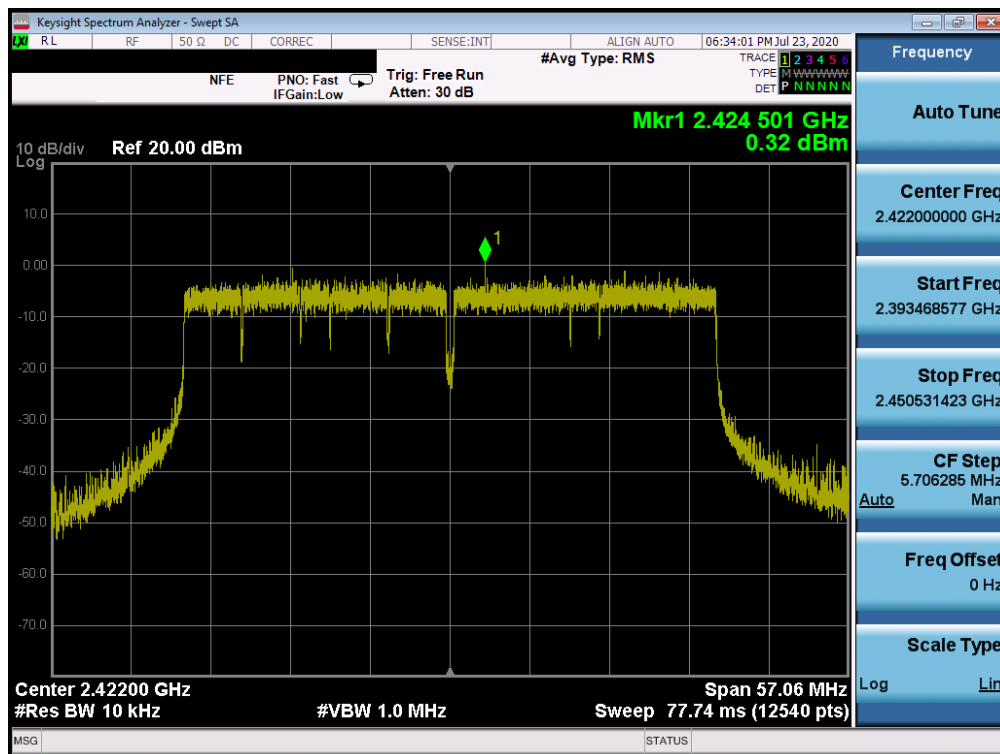


Plot 7-94. Power Spectral Density Plot ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 3)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 71 of 118 |

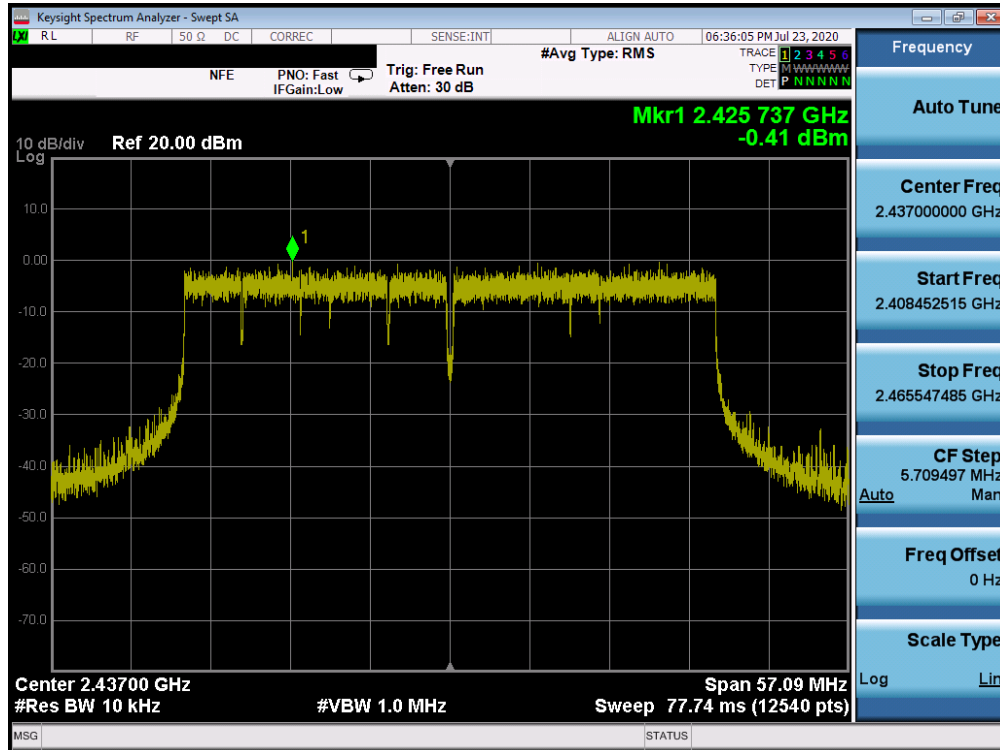

Plot 7-95. Power Spectral Density Plot ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 6)

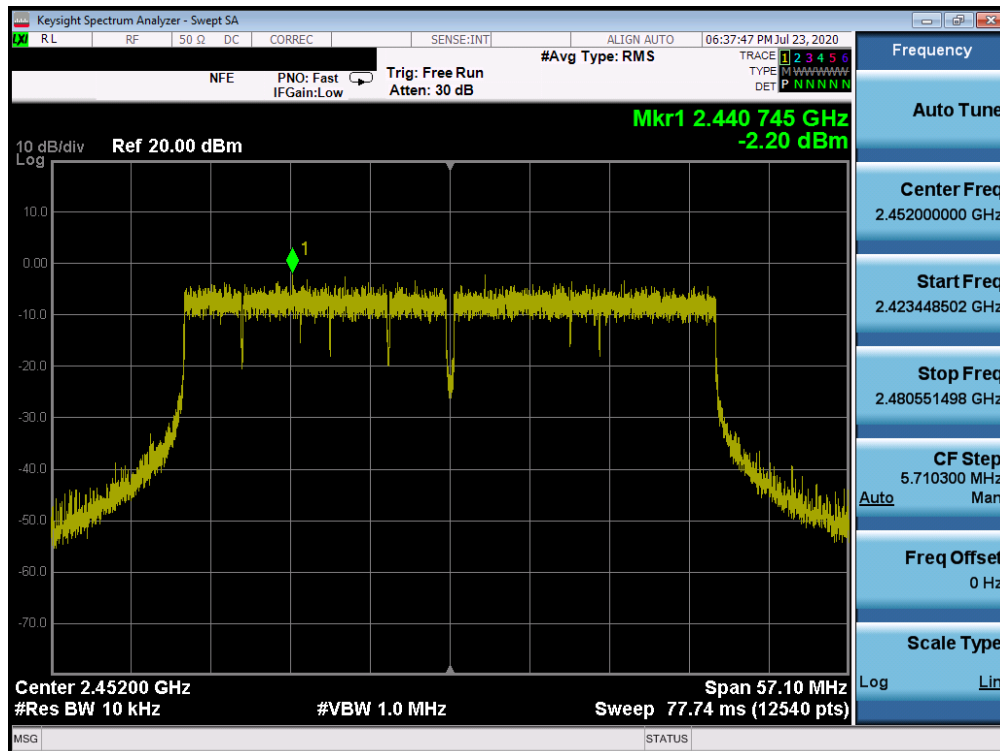

Plot 7-96. Power Spectral Density Plot ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 9)

| | | | | |
|---|--|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 72 of 118 |

MIMO Power Spectral Density Measurements

| Frequency [MHz] | Bandwidth | Channel No. | 802.11 Mode | Data Rate [Mbps] | ANT 1 Power Spectral Density [dBm] | ANT 2 Power Spectral Density [dBm] | Summed MIMO Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-----------|-------------|-------------|------------------|------------------------------------|------------------------------------|--|--|-------------|-------------|
| 2412 | 20MHz | 1 | b | 1 | -0.12 | 0.22 | 3.06 | 8.00 | -4.94 | Pass |
| 2437 | 20MHz | 6 | b | 1 | 0.60 | 1.31 | 3.98 | 8.00 | -4.02 | Pass |
| 2462 | 20MHz | 11 | b | 1 | 0.52 | 1.50 | 4.04 | 8.00 | -3.96 | Pass |
| 2412 | 20MHz | 1 | g | 6 | 2.29 | 0.78 | 4.61 | 8.00 | -3.39 | Pass |
| 2437 | 20MHz | 6 | g | 6 | 4.37 | 5.05 | 7.73 | 8.00 | -0.27 | Pass |
| 2462 | 20MHz | 11 | g | 6 | 4.76 | 5.08 | 7.93 | 8.00 | -0.07 | Pass |
| 2412 | 20MHz | 1 | n | MCS0 | 1.96 | 2.75 | 5.38 | 8.00 | -2.62 | Pass |
| 2437 | 20MHz | 6 | n | MCS0 | 4.26 | 5.24 | 7.79 | 8.00 | -0.21 | Pass |
| 2462 | 20MHz | 11 | n | MCS0 | 1.02 | 2.49 | 4.83 | 8.00 | -3.17 | Pass |
| 2412 | 20MHz | 1 | ac | MCS0 | 1.51 | 2.40 | 4.99 | 8.00 | -3.01 | Pass |
| 2437 | 20MHz | 6 | ac | MCS0 | 4.36 | 5.36 | 7.90 | 8.00 | -0.10 | Pass |
| 2462 | 20MHz | 11 | ac | MCS0 | 1.64 | 2.94 | 5.35 | 8.00 | -2.65 | Pass |
| 2412 | 20MHz | 1 | ax | MCS0 | 0.89 | 1.50 | 4.22 | 8.00 | -3.78 | Pass |
| 2437 | 20MHz | 6 | ax | MCS0 | 4.51 | 4.50 | 7.52 | 8.00 | -0.48 | Pass |
| 2462 | 20MHz | 11 | ax | MCS0 | 0.79 | 1.77 | 4.32 | 8.00 | -3.68 | Pass |
| 2422 | 40MHz | 3 | n | MCS0 | -1.29 | 2.75 | 4.19 | 8.00 | -3.81 | Pass |
| 2437 | 40MHz | 6 | n | MCS0 | 0.23 | 5.24 | 6.43 | 8.00 | -1.57 | Pass |
| 2452 | 40MHz | 9 | n | MCS0 | -2.80 | 2.49 | 3.62 | 8.00 | -4.38 | Pass |
| 2422 | 40MHz | 3 | ac | MCS0 | -0.73 | -0.55 | 2.37 | 8.00 | -5.63 | Pass |
| 2437 | 40MHz | 6 | ac | MCS0 | -0.70 | 1.20 | 3.36 | 8.00 | -4.64 | Pass |
| 2452 | 40MHz | 9 | ac | MCS0 | -1.95 | -2.50 | 0.79 | 8.00 | -7.21 | Pass |
| 2422 | 40MHz | 3 | ax | MCS0 | -1.21 | 0.32 | 2.63 | 8.00 | -5.37 | Pass |
| 2437 | 40MHz | 6 | ax | MCS0 | -0.15 | -0.41 | 2.73 | 8.00 | -5.27 | Pass |
| 2452 | 40MHz | 9 | ax | MCS0 | -2.90 | -2.20 | 0.47 | 8.00 | -7.53 | Pass |

Table 7-12. MIMO Conducted Power Density Measurements

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 73 of 118 | |

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be 4.26 dBm for Antenna-1 and 5.24 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(4.26 \text{ dBm} + 5.24 \text{ dBm}) = (2.67 \text{ mW} + 3.34 \text{ mW}) = 6.01 \text{ mW} = 7.79 \text{ dBm}$$

| | | | | |
|--|---|--|---|--|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 74 of 118 |

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode, and 8.6Mbps for “ax” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 75 of 118 | |

Antenna-1 Conducted Emissions at the Band Edge

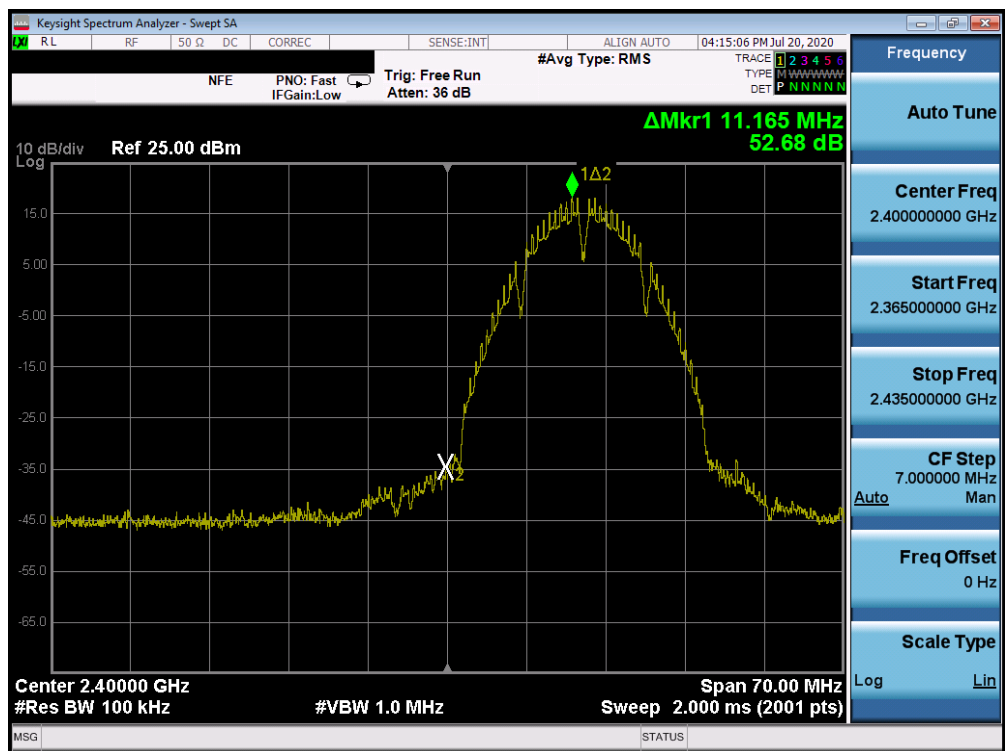


Plot 7-97. Band Edge Plot ANT1 (802.11b – Ch. 1)

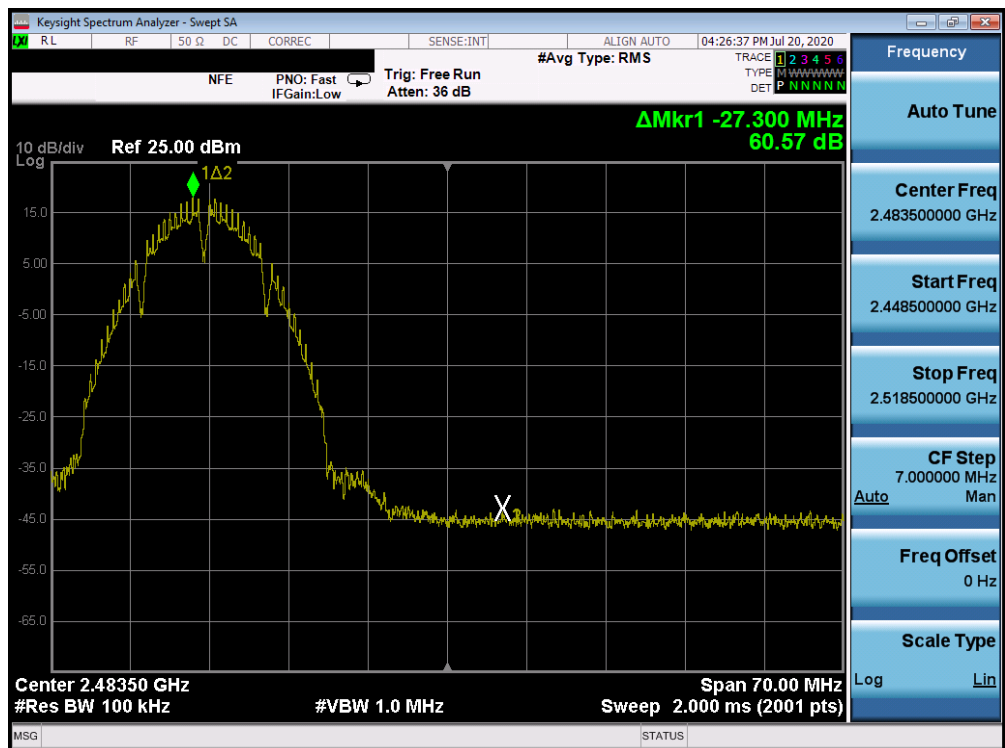


Plot 7-98. Band Edge Plot ANT1 (802.11b – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 76 of 118 |

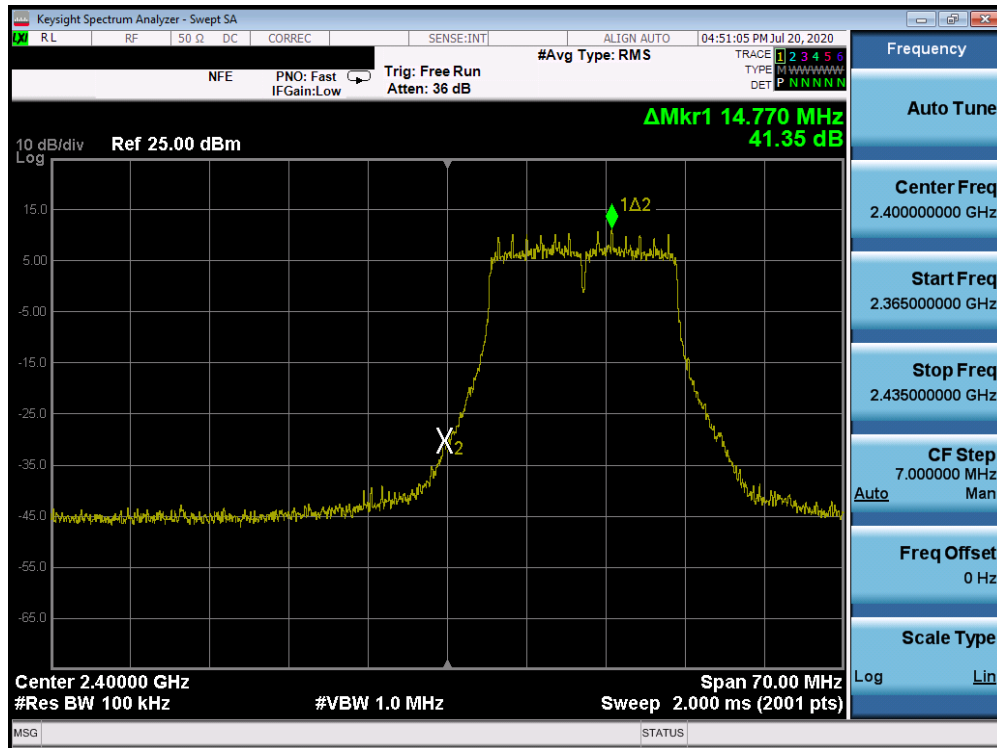


Plot 7-99. Band Edge Plot ANT1 (802.11g- Ch. 1)

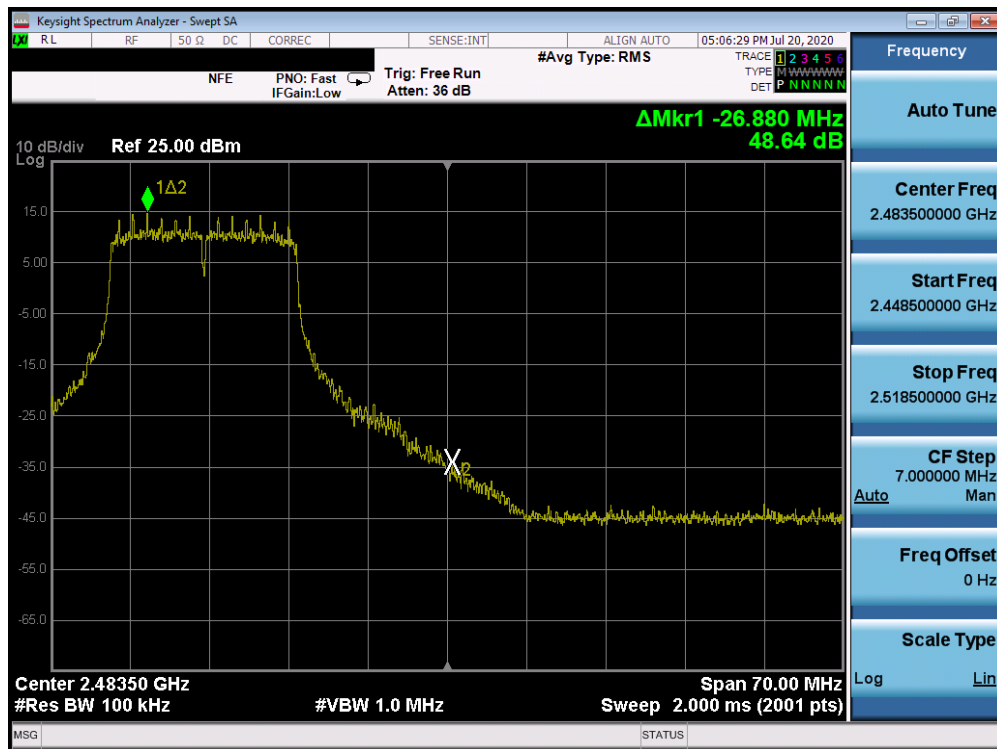


Plot 7-100. Band Edge Plot ANT1 (802.11g - Ch. 11)

| | | | | |
|---|---|---|--|---------------------------------|
| FCC ID: A3LSMH204V | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 77 of 118 |

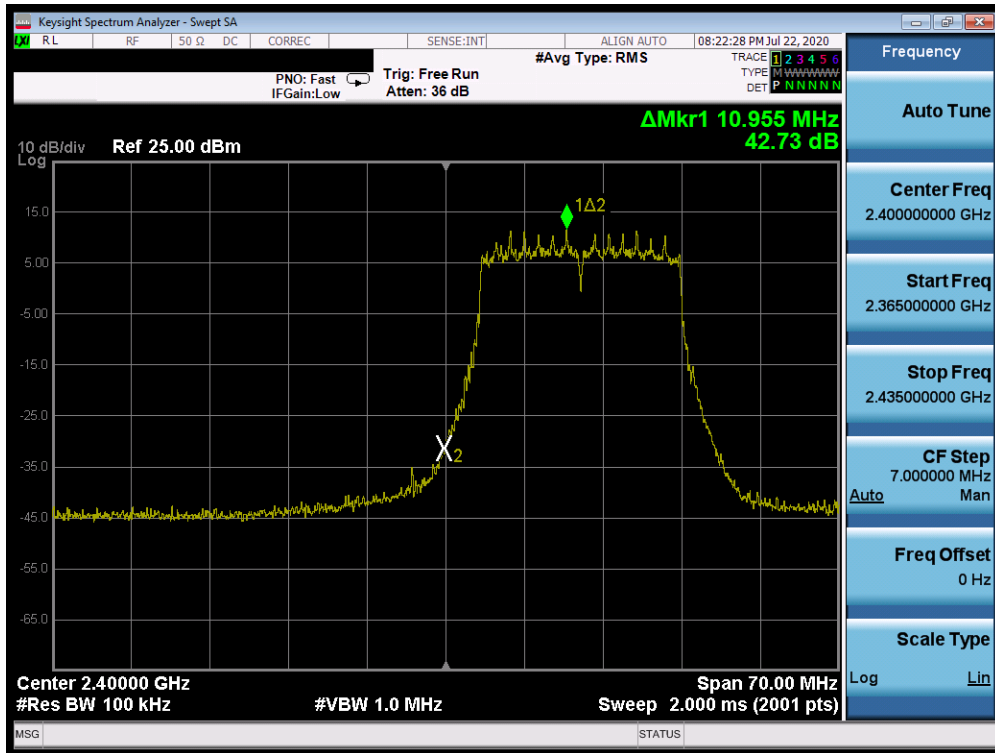


Plot 7-101. Band Edge Plot ANT1 (802.11n (2.4GHz) – Ch. 1)

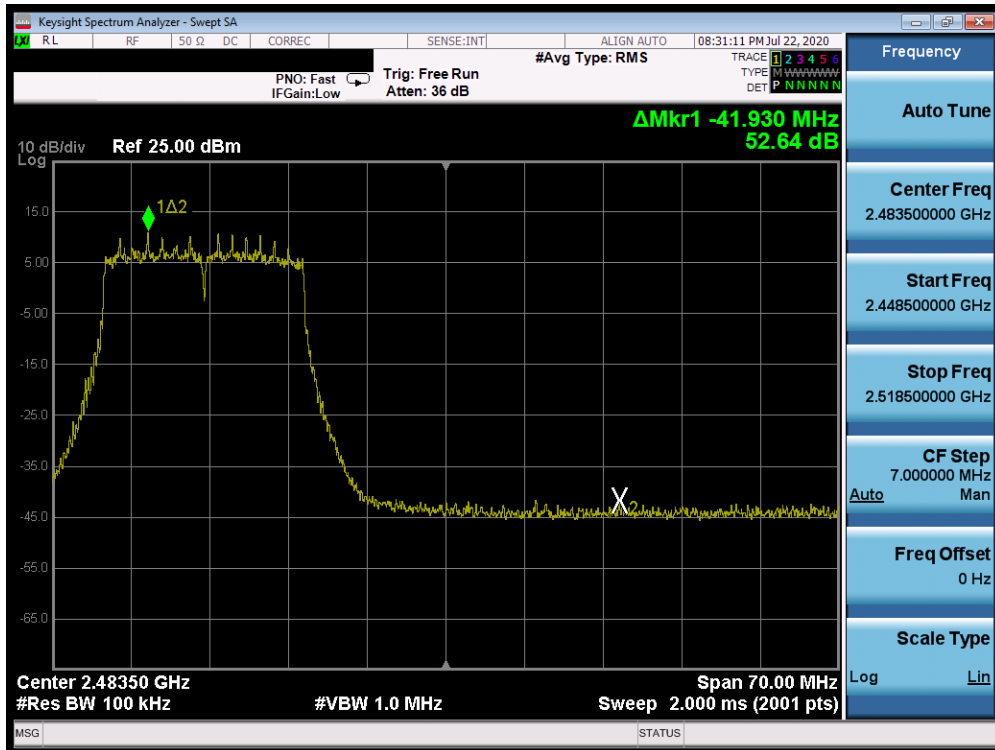


Plot 7-102. Band Edge Plot ANT1 (802.11n (2.4GHz) – Ch. 11)

| | | | |
|---|---|---|--|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | Page 78 of 118 |

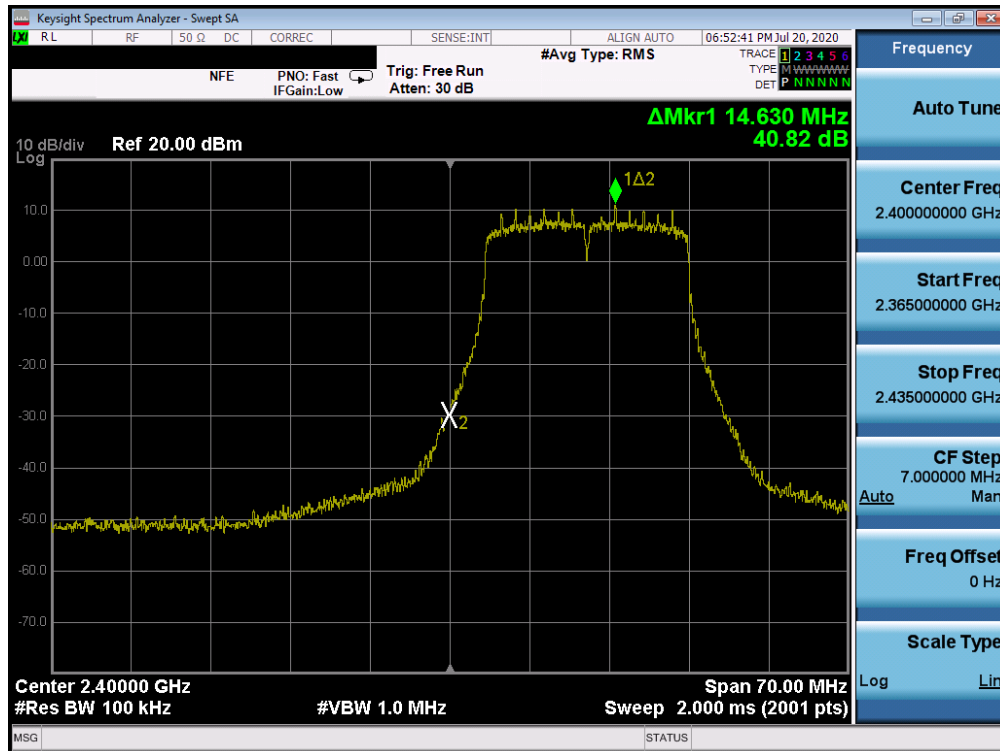

Plot 7-103. Band Edge Plot ANT1 (802.11ac (2.4GHz) – Ch. 1)

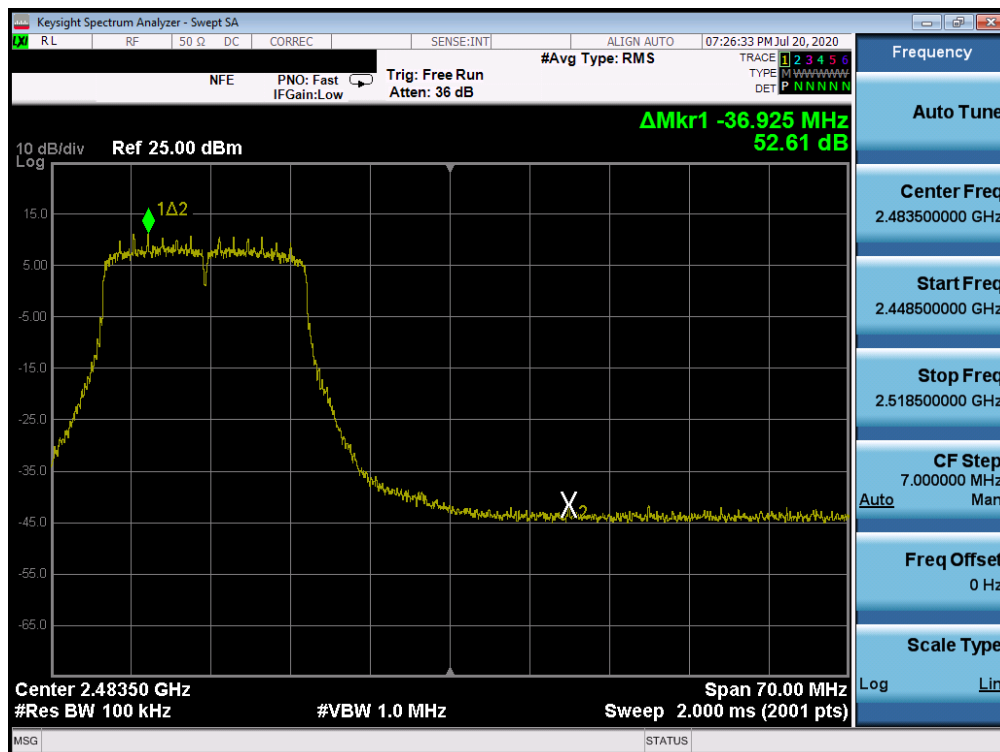

Plot 7-104. Band Edge Plot ANT1 (802.11ac (2.4GHz) – Ch. 11)

| | | | | |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMH204V |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M2004140062-06.A3L | Test Dates: 4/29 - 8/12/2020 | EUT Type: Indoor Customer Premises Equipment (CPE) | | Page 79 of 118 |