

# FCC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
January 30, 2019

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-RF-1901-FC024

**FCC ID:** A3LSMM305F

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**Model(s):** SM-M305M/DS  
**Additional Model(s):** SM-M305F/DS, SM-M305F, SM-M305M  
**EUT Type:** Mobile Phone  
**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41 (5)	2498.5 – 2687.5	4M52G7D	QPSK	0.078	18.98
		4M51W7D	16QAM	0.058	17.75
LTE – Band 41 (10)	2501.0 – 2685.0	9M01G7D	QPSK	0.081	19.09
		8M96W7D	16QAM	0.058	17.79
LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.087	19.22
		13M5W7D	16QAM	0.063	17.94
LTE – Band 41 (20)	2506.0 – 2680.0	17M8G7D	QPSK	0.084	18.54
		17M8W7D	16QAM	0.060	16.91

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)




**Report prepared by : Jae Ryang Do**  
Engineer of Telecommunication Testing Center

**Report approved by : Jong Seok Lee**  
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1901-FC024	January 30, 2019	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. DESCRIPTION OF EUT .....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS .....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER .....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 OCCUPIED BANDWIDTH .....	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	10
3.6 CHANNEL EDGE .....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	12
3.8 WORST CASE(RADIATED TEST) .....	13
3.9 WORST CASE(CONDUCTED TEST) .....	14
4. LIST OF TEST EQUIPMENT .....	15
5. MEASUREMENT UNCERTAINTY .....	16
6. SUMMARY OF TEST RESULTS .....	17
7. SAMPLE CALCULATION .....	18
8. TEST DATA .....	20
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	20
8.2 RADIATED SPURIOUS EMISSIONS .....	22
8.3 OCCUPIED BANDWIDTH .....	26
8.4 CONDUCTED SPURIOUS EMISSIONS .....	27
8.5 CHANNEL EDGE .....	28
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	29
8.7 GEO-LOCATION MECHANISM .....	41
9. TEST PLOTS .....	50
10. APPENDIX A_ TEST SETUP PHOTO .....	103

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMM305F
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	Licensed Portable Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27, §2
<b>EUT Type:</b>	Mobile Phone
<b>Model(s):</b>	SM-M305M/DS
<b>Additional Model(s):</b>	SM-M305F/DS, SM-M305F, SM-M305M
<b>Tx Frequency:</b>	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
<b>Date(s) of Tests:</b>	January 09, 2019 ~ January 25, 2019

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.  
It also supports IEEE 802.11/ a/b/g/n/ac, Bluetooth, BT LE.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### **Test Overview**

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### **Test Settings**


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### **Test Note**

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data



### 3.4 OCCUPIED BANDWIDTH.

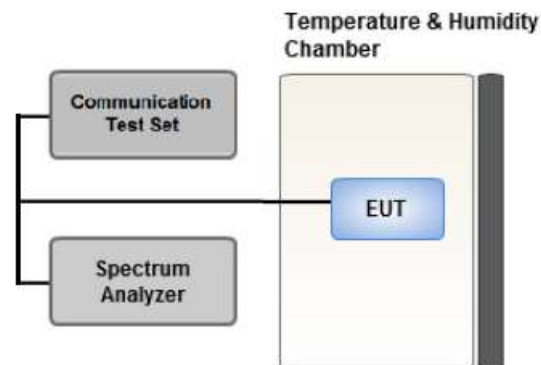

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

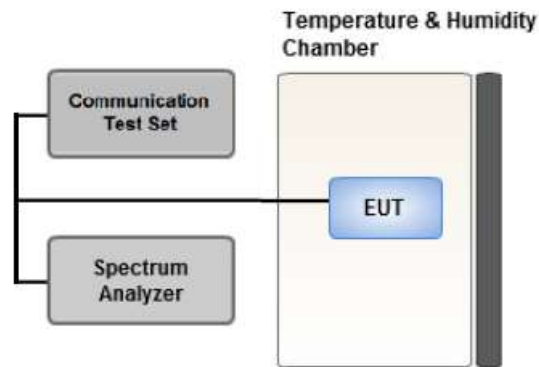

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.6 CHANNEL EDGE

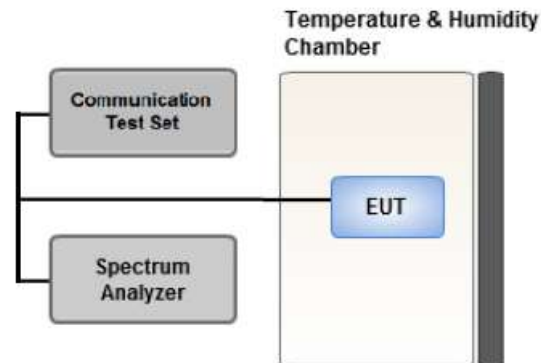

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### **Test Settings**

1. Start and stop frequency were set such that the channel edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 2% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### **Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
2. All measurements were done at 3 channels.
3. The channel edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

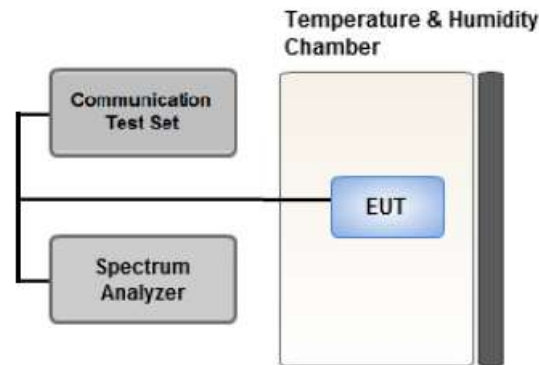

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

**Note:**

- SM-M305M/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-M305M/DS)

### 3.9 WORST CASE(CONDUCTED TEST)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	5, 10, 15, 20	Mid	Full RB	0
Band Edge	* QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
5, 10, 15, 20	* QPSK	Low, High	Full RB	0	
		Low, Mid, High	Full RB	0	
Channel Edge	* QPSK	5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	5, 10, 15, 20	Low, Mid, High	1	0

\* Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.  
Conducted Output Power value can be confirmed on the SAR report.

**Note:**

- SM-M305M/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-M305M/DS)

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/13/2018	Annual	08/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71



## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> <li>■ &lt; 40 + 10log10 (P[Watts]) at Channel edges</li> <li>■ &lt; 43 + 10log10 (P[Watts]) between 5 and X MHz from Channel edges</li> <li>■ &lt; 55 + 10log10 (P[Watts]) beyond X MHz beyond from Channel edges</li> <li>■ &lt; 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul>	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	< 55 + 10log10 (P[Watts])	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

#### ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

#### EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2498.5	LTE B41/ 5 MHz	QPSK	-27.26	7.38	10.98	1.60	V	< 2.00	0.047	16.76
		16-QAM	-28.63	6.01	10.98	1.60	V		0.035	15.39
2593.0		QPSK	-25.20	9.55	11.06	1.63	V		0.079	18.98
		16-QAM	-26.43	8.32	11.06	1.63	V		0.060	17.75
2687.5		QPSK	-28.78	6.50	11.15	1.65	V		0.040	16.00
		16-QAM	-29.99	5.29	11.15	1.65	V		0.030	14.79

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2501.0	LTE B41/ 10 MHz	QPSK	-26.98	7.66	10.98	1.60	V	< 2.00	0.051	17.04
		16-QAM	-28.27	6.37	10.98	1.60	V		0.038	15.75
2593.0		QPSK	-25.09	9.66	11.06	1.63	V		0.081	19.09
		16-QAM	-26.39	8.36	11.06	1.63	V		0.060	17.79
2685.0		QPSK	-28.25	6.91	11.15	1.65	V		0.044	16.41
		16-QAM	-29.44	5.72	11.15	1.65	V		0.033	15.22

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2503.5	LTE B41/ 15 MHz	QPSK	-26.86	7.71	10.98	1.61	V	< 2.00	0.051	17.08
		16-QAM	-28.17	6.40	10.98	1.61	V		0.038	15.77
2593.0		QPSK	-24.96	9.79	11.06	1.63	V		0.084	19.22
		16-QAM	-26.24	8.51	11.06	1.63	V		0.062	17.94
2682.5		QPSK	-28.45	6.58	11.15	1.64	V		0.041	16.09
		16-QAM	-29.67	5.36	11.15	1.64	V		0.031	14.87

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2506.0	LTE B41/ 20 MHz	QPSK	-26.69	7.88	10.98	1.61	V	< 2.00	0.053	17.25
		16-QAM	-28.19	6.38	10.98	1.61	V		0.038	15.75
2593.0		QPSK	-25.64	9.11	11.06	1.63	V		0.071	18.54
		16-QAM	-27.27	7.48	11.06	1.63	V		0.049	16.91
2680.0		QPSK	-27.64	7.39	11.15	1.64	V		0.049	16.90
		16-QAM	-29.23	5.80	11.15	1.64	V		0.034	15.31

**8.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY : 2498.50 MHz
- ▣ MEASURED OUTPUT POWER: 18.94 dBm = 0.078 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  43.94 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39675 (2498.5)	4,997.00	-46.91	12.89	-60.60	2.47	H	-50.18	69.13
	7,495.50	-38.88	11.51	-45.62	2.97	H	-37.08	56.02
	9,994.00	-37.26	11.21	-39.71	3.48	H	-31.98	50.92
	12,492.50	-44.59	14.20	-49.17	4.17	H	-39.14	58.09
	14,991.00	-49.44	13.20	-52.28	4.34	H	-43.42	62.37
40620 (2593.0)	5,186.00	-49.90	13.05	-62.50	2.58	V	-52.03	70.97
	7,779.00	-36.53	11.98	-44.05	2.93	H	-35.00	53.95
	10,372.00	-46.72	10.96	-49.71	3.62	V	-42.37	61.31
	12,965.00	-43.24	13.61	-45.84	4.08	H	-36.31	55.25
	15,558.00	-49.04	16.58	-53.85	4.40	V	-41.67	60.61
41565 (2687.5)	5,375.00	-52.02	13.49	-65.30	2.65	V	-54.46	73.41
	8,062.50	-39.82	11.46	-44.64	3.05	V	-36.23	55.17
	10,750.00	-51.27	10.99	-54.17	3.67	V	-46.85	65.79
	13,437.50	-40.51	13.01	-41.98	4.09	V	-33.06	52.00

- ▣ OPERATING FREQUENCY : 2501.00 MHz
- ▣ MEASURED OUTPUT POWER: 19.09 dBm = 0.081 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  44.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39700 (2501.0)	5,002.00	-47.67	12.89	-61.36	2.47	V	-50.94	70.04
	7,503.00	-38.83	11.53	-45.26	2.92	H	-36.66	55.75
	10,004.00	-37.52	11.25	-40.36	3.41	V	-32.52	51.61
	12,505.00	-47.01	14.24	-51.59	3.99	H	-41.34	60.43
	15,006.00	-50.41	13.27	-53.17	4.36	H	-44.27	63.36
40620 (2593.0)	5,186.00	-49.79	13.05	-62.39	2.58	H	-51.92	71.01
	7,779.00	-35.87	11.98	-43.39	2.93	H	-34.34	53.44
	10,372.00	-48.24	10.96	-51.23	3.62	H	-43.89	62.98
	12,965.00	-44.41	13.61	-47.01	4.08	V	-37.48	56.57
	15,558.00	-54.20	16.58	-59.01	4.40	V	-46.83	65.92
41540 (2685.0)	5,370.00	-51.50	13.50	-65.08	2.65	H	-54.23	73.32
	8,055.00	-38.33	11.46	-43.22	3.05	V	-34.82	53.91
	10,740.00	-53.71	10.98	-56.52	3.62	H	-49.16	68.25
	13,425.00	-40.30	13.07	-41.89	4.18	V	-33.00	52.10

- ▣ OPERATING FREQUENCY : 2503.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.39 dBm = 0.087 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  44.39 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39725 (2503.5)	5,007.00	-47.89	12.86	-62.02	2.49	V	-51.65	71.04
	7,510.50	-39.99	11.54	-46.13	2.90	V	-37.49	56.88
	10,014.00	-37.00	11.27	-40.16	3.40	H	-32.30	51.69
	12,517.50	-45.70	14.23	-50.01	4.05	H	-39.83	59.22
	15,021.00	-50.89	13.31	-53.53	4.34	H	-44.56	63.95
40620 (2593.0)	5,186.00	-49.08	13.05	-61.68	2.58	H	-51.21	70.60
	7,779.00	-35.87	11.98	-43.39	2.93	H	-34.34	53.74
	10,372.00	-46.71	10.96	-49.70	3.62	H	-42.36	61.75
	12,965.00	-43.63	13.61	-46.23	4.08	V	-36.70	56.09
	15,558.00	-53.74	16.58	-58.55	4.40	V	-46.37	65.76
41515 (2682.5)	5,365.00	-51.14	13.51	-64.79	2.64	H	-53.92	73.32
	8,047.50	-40.00	11.45	-44.97	3.05	V	-36.57	55.96
	10,730.00	-53.24	10.98	-56.05	3.60	V	-48.67	68.06
	13,412.50	-45.41	13.09	-47.40	4.17	V	-38.48	57.87



- ▣ OPERATING FREQUENCY : 2506.00 MHz
- ▣ MEASURED OUTPUT POWER: 19.23 dBm = 0.084 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  44.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39750 (2506.0)	5,012.00	-47.65	12.86	-61.78	2.49	V	-51.41	70.64
	7,518.00	-39.41	11.57	-44.72	2.93	H	-36.08	55.32
	10,024.00	-38.58	11.29	-41.41	3.48	H	-33.59	52.83
	12,530.00	-45.58	14.22	-50.23	4.17	H	-40.18	59.41
	15,036.00	-53.03	13.39	-55.80	4.30	H	-46.71	65.94
40620 (2593.0)	5,186.00	-50.70	13.05	-63.30	2.58	H	-52.83	72.06
	7,779.00	-34.53	11.98	-42.05	2.93	H	-33.00	52.24
	10,372.00	-45.15	10.96	-48.14	3.62	H	-40.80	60.03
	12,965.00	-42.90	13.61	-45.50	4.08	V	-35.97	55.20
	15,558.00	-51.21	16.58	-56.02	4.40	H	-43.84	63.07
41490 (2680.0)	5,360.00	-51.28	13.51	-65.00	2.63	H	-54.12	73.35
	8,040.00	-39.54	11.46	-44.44	3.06	V	-36.04	55.27
	10,720.00	-53.03	10.97	-55.66	3.66	V	-48.35	67.58
	13,400.00	-41.96	13.11	-43.48	4.16	V	-34.53	53.76

**8.3 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
41	5 MHz	2593.0	QPSK	25	0	4.5147
			16-QAM	25		4.5102
	10 MHz		QPSK	50		9.0054
			16-QAM	50		8.9629
	15 MHz		QPSK	75		13.495
			16-QAM	75		13.484
	20 MHz		QPSK	100		17.777
			16-QAM	100		17.805

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 51 ~ 58.

**8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	26.1246	30.131	-67.399	-37.268	-25.00
		2593.0	26.1374	30.131	-67.036	-36.905	
		2687.5	26.1452	30.131	-67.243	-37.112	
	10	2501.0	25.8416	30.131	-66.757	-36.626	
		2593.0	26.4332	30.131	-66.891	-36.760	
		2685.0	26.1469	30.131	-67.550	-37.419	
	15	2503.5	25.8293	30.131	-67.574	-37.443	
		2593.0	25.7760	30.131	-67.113	-36.982	
		2682.5	25.8557	30.131	-67.033	-36.902	
	20	2506.0	26.1011	30.131	-67.364	-37.233	
		2593.0	26.1795	30.131	-66.500	-36.369	
		2680.0	26.3688	30.131	-67.057	-36.926	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 75 ~ 102.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

**8.5 CHANNEL EDGE**

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2498.5	QPSK	25/0	-18.52	-18.72	-18.11	-18.84	-36.51	-34.62	-35.95
10 MHz	2501.0	QPSK	50/0	-24.30	-22.78	-23.24	-24.32	-33.00	-31.32	-36.69
15 MHz	2503.5	QPSK	75/0	-26.60	-25.46	-26.43	-27.10	-32.28	-32.27	-34.41
20 MHz	2506.0	QPSK	100/0	-28.72	-30.22	-28.78	-31.07	-33.35	-34.67	-43.29
Limit				-13.0	-10.0	-13.0	-13.0	-10.0	-13.0	-10.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-21.75	-21.24	-23.73	-23.92
	2687.5	QPSK	25	0	-22.38	-23.65	-24.88	-25.40
10 MHz	2593.0	QPSK	50	0	-26.59	-25.09	-26.28	-26.43
	2685.0	QPSK	50	0	-26.07	-25.40	-26.39	-26.04
15 MHz	2593.0	QPSK	75	0	-27.78	-27.17	-28.44	-28.67
	2682.5	QPSK	75	0	-28.30	-29.00	-29.52	-30.40
20 MHz	2593.0	QPSK	100	0	-30.41	-30.32	-30.07	-31.13
	2680.0	QPSK	100	0	-30.34	-29.95	-29.04	-28.95
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-36.35	-34.71	-38.87	-37.23
	2687.5	QPSK	25	0	-33.97	-33.49	-37.53	-37.11
10 MHz	2593.0	QPSK	50	0	-33.06	-32.06	-39.88	-38.17
	2685.0	QPSK	50	0	-30.76	-30.12	-36.94	-36.03
15 MHz	2593.0	QPSK	75	0	-32.01	-31.39	-35.18	-35.29
	2682.5	QPSK	75	0	-33.15	-32.52	-37.44	-40.99
20 MHz	2593.0	QPSK	100	0	-32.24	-32.18	-42.55	-39.94
	2680.0	QPSK	100	0	-31.12	-30.08	-41.06	-47.60
Limit					-13.0		-25.0	


**Note:**

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 59 ~ 74.

**8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,000,000 Hz
- ▣ CHANNEL: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2498 499 993	0.0	0.000 000	0.000
100%		-30	2498 499 988	-5.0	0.000 000	-0.002
100%		-20	2498 499 986	-6.6	0.000 000	-0.003
100%		-10	2498 499 988	-4.9	0.000 000	-0.002
100%		0	2498 499 983	-9.4	0.000 000	-0.004
100%		+10	2498 499 990	-3.2	0.000 000	-0.001
100%		+30	2498 499 986	-6.7	0.000 000	-0.003
100%		+40	2498 499 988	-5.3	0.000 000	-0.002
100%		+50	2498 499 989	-3.4	0.000 000	-0.001
85%		3.40	+20	2498 499 987	-6.1	0.000 000

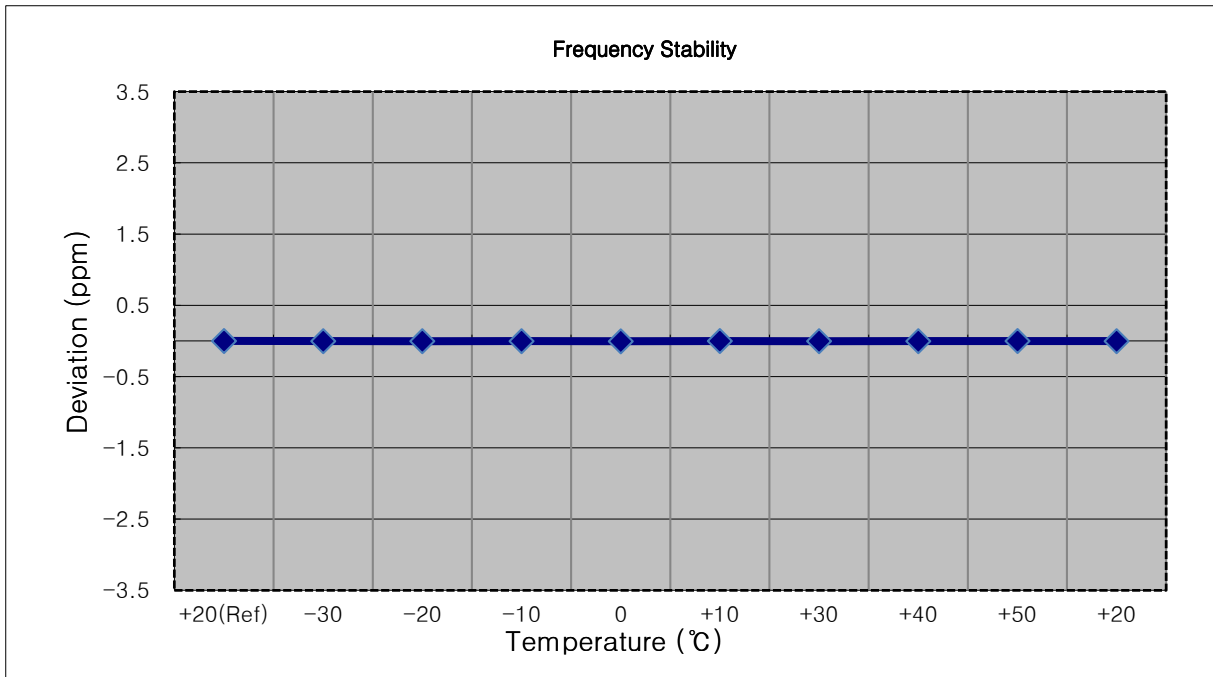


- MODE: LTE 41
- OPERATING FREQUENCY: 2501,000,000 Hz
- CHANNEL: 39700 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2500 999 994	0.0	0.000 000	0.000
100%		-30	2500 999 986	-8.3	0.000 000	-0.003
100%		-20	2500 999 989	-5.3	0.000 000	-0.002
100%		-10	2500 999 988	-5.7	0.000 000	-0.002
100%		0	2500 999 990	-4.1	0.000 000	-0.002
100%		+10	2500 999 989	-5.5	0.000 000	-0.002
100%		+30	2500 999 992	-2.4	0.000 000	-0.001
100%		+40	2500 999 990	-4.1	0.000 000	-0.002
100%		+50	2500 999 988	-5.8	0.000 000	-0.002
85%	3.40	+20	2500 999 990	-4.2	0.000 000	-0.002

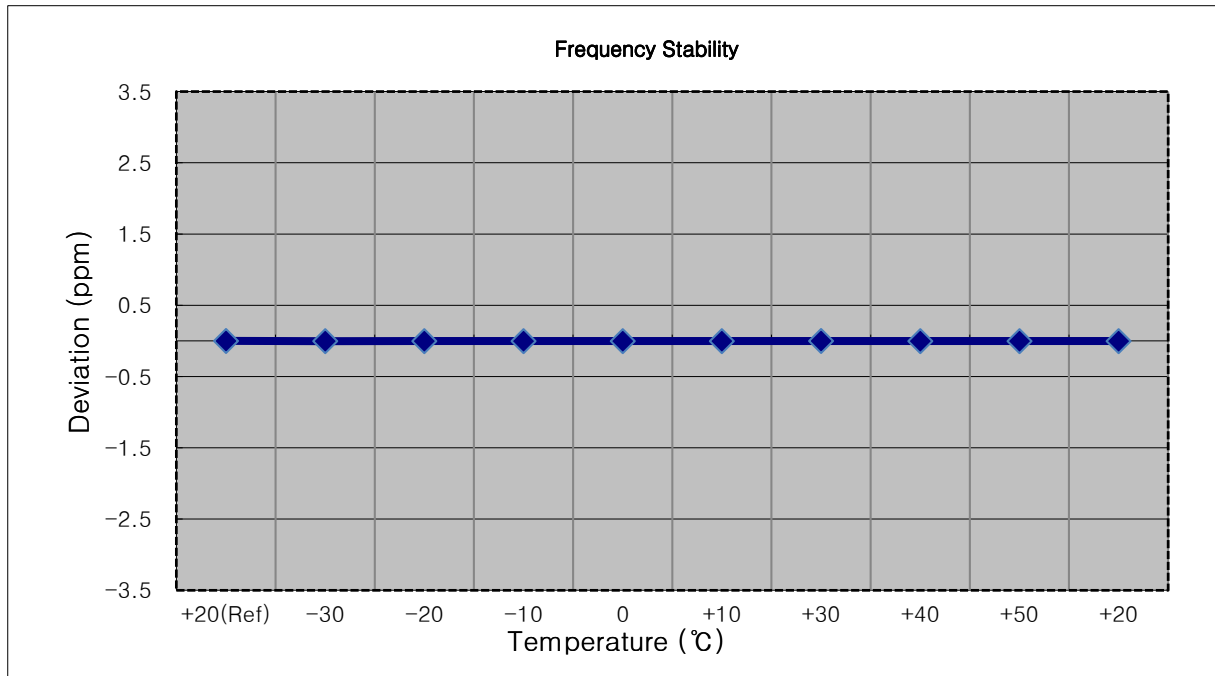


- MODE: LTE 41
- OPERATING FREQUENCY: 2503,000,000 Hz
- CHANNEL: 39725 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2503 499 996	0.0	0.000 000	0.000
100%		-30	2503 499 988	-7.2	0.000 000	-0.003
100%		-20	2503 499 988	-7.6	0.000 000	-0.003
100%		-10	2503 499 990	-6.0	0.000 000	-0.002
100%		0	2503 499 990	-5.7	0.000 000	-0.002
100%		+10	2503 499 991	-5.0	0.000 000	-0.002
100%		+30	2503 499 989	-6.6	0.000 000	-0.003
100%		+40	2503 499 988	-7.6	0.000 000	-0.003
100%		+50	2503 499 990	-5.6	0.000 000	-0.002
85%	3.40	+20	2503 499 987	-8.9	0.000 000	-0.004

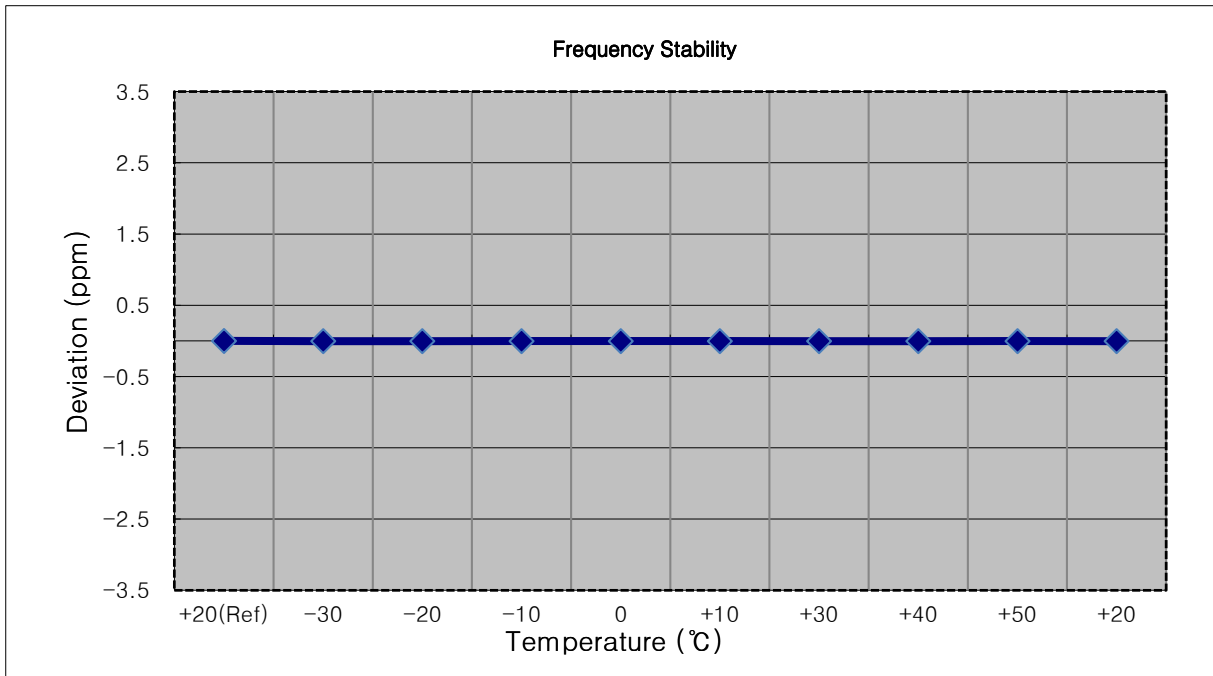

- MODE: LTE 41
- OPERATING FREQUENCY: 2506,000,000 Hz
- CHANNEL: 39750 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2505 999 994	0.0	0.000 000	0.000
100%		-30	2505 999 987	-7.2	0.000 000	-0.003
100%		-20	2505 999 987	-6.8	0.000 000	-0.003
100%		-10	2505 999 990	-4.5	0.000 000	-0.002
100%		0	2505 999 989	-4.7	0.000 000	-0.002
100%		+10	2505 999 987	-7.0	0.000 000	-0.003
100%		+30	2505 999 989	-5.5	0.000 000	-0.002
100%		+40	2505 999 989	-5.0	0.000 000	-0.002
100%		+50	2505 999 990	-4.0	0.000 000	-0.002
85%	3.40	+20	2505 999 989	-5.3	0.000 000	-0.002

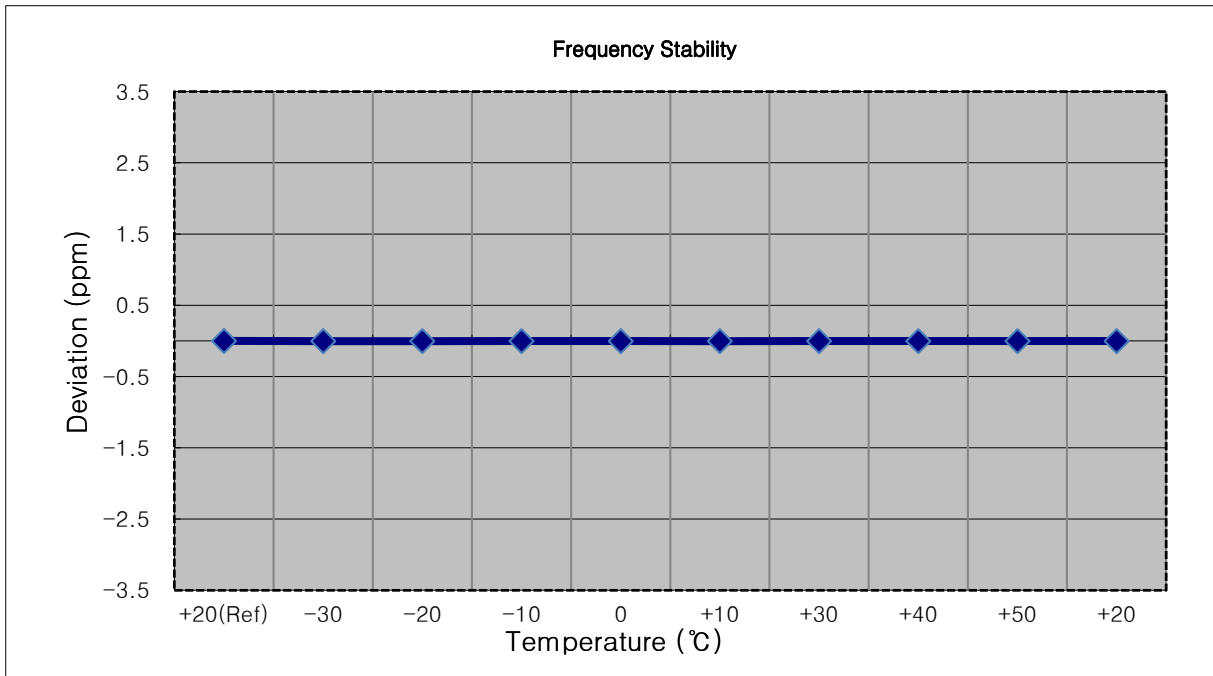




- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- CHANNEL: 40620 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2592 999 995	0.0	0.000 000	0.000
100%		-30	2592 999 992	-3.7	0.000 000	-0.001
100%		-20	2592 999 991	-4.3	0.000 000	-0.002
100%		-10	2592 999 991	-4.4	0.000 000	-0.002
100%		0	2592 999 992	-3.3	0.000 000	-0.001
100%		+10	2592 999 991	-4.8	0.000 000	-0.002
100%		+30	2592 999 999	3.2	0.000 000	0.001
100%		+40	2592 999 992	-3.5	0.000 000	-0.001
100%		+50	2592 999 992	-3.2	0.000 000	-0.001
85%		3.40	+20	2592 999 990	-4.9	0.000 000

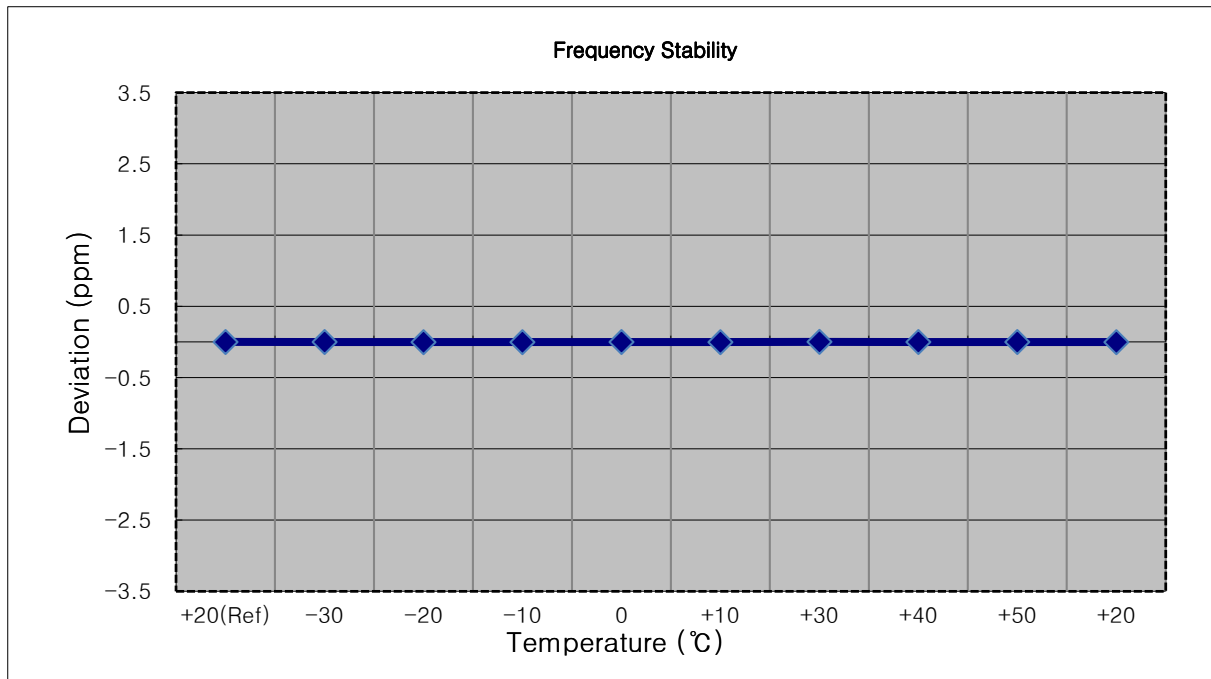


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- CHANNEL: 40620 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2592 999 993	0.0	0.000 000	0.000
100%		-30	2592 999 987	-6.1	0.000 000	-0.002
100%		-20	2592 999 989	-4.3	0.000 000	-0.002
100%		-10	2592 999 988	-5.2	0.000 000	-0.002
100%		0	2592 999 989	-4.0	0.000 000	-0.002
100%		+10	2592 999 987	-5.9	0.000 000	-0.002
100%		+30	2592 999 990	-3.0	0.000 000	-0.001
100%		+40	2592 999 988	-4.8	0.000 000	-0.002
100%		+50	2592 999 989	-4.0	0.000 000	-0.002
Batt. Endpoint	3.40	+20	2592 999 987	-6.3	0.000 000	-0.002

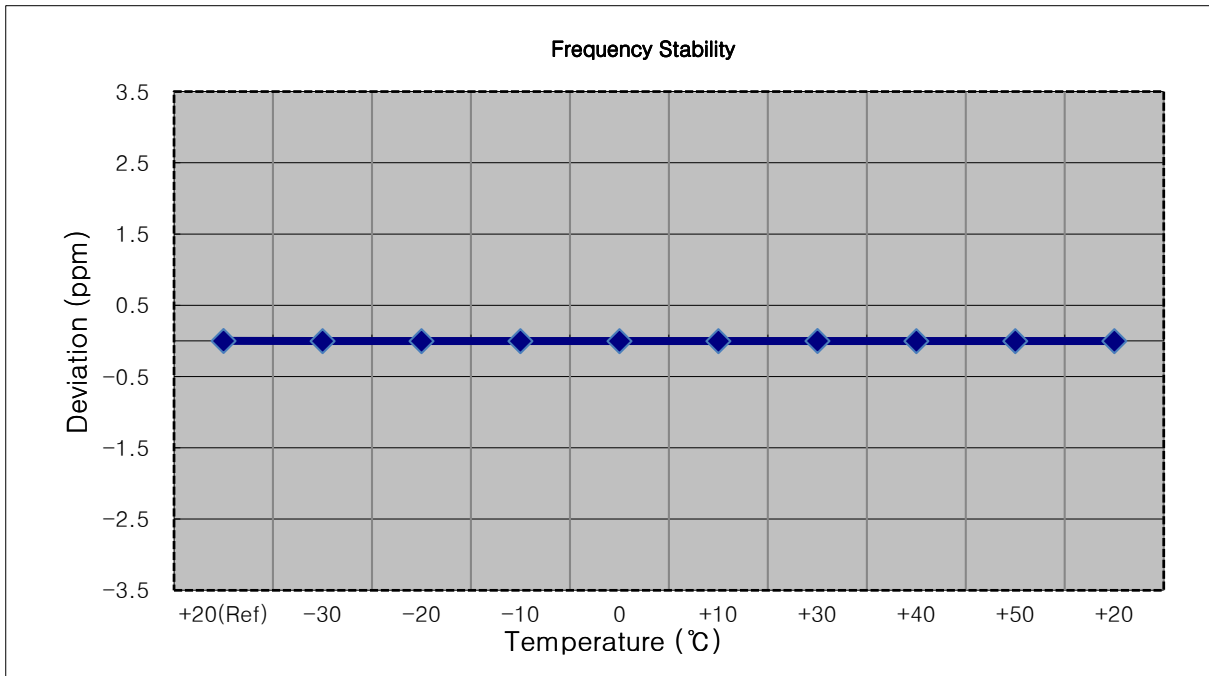


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- CHANNEL: 40620 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2592 999 993	0.0	0.000 000	0.000
100%		-30	2592 999 989	-4.3	0.000 000	-0.002
100%		-20	2592 999 988	-4.6	0.000 000	-0.002
100%		-10	2592 999 990	-3.4	0.000 000	-0.001
100%		0	2592 999 988	-5.4	0.000 000	-0.002
100%		+10	2592 999 986	-7.0	0.000 000	-0.003
100%		+30	2592 999 989	-4.2	0.000 000	-0.002
100%		+40	2592 999 985	-8.2	0.000 000	-0.003
100%		+50	2592 999 989	-4.2	0.000 000	-0.002
85%	3.40	+20	2592 999 986	-6.7	0.000 000	-0.003

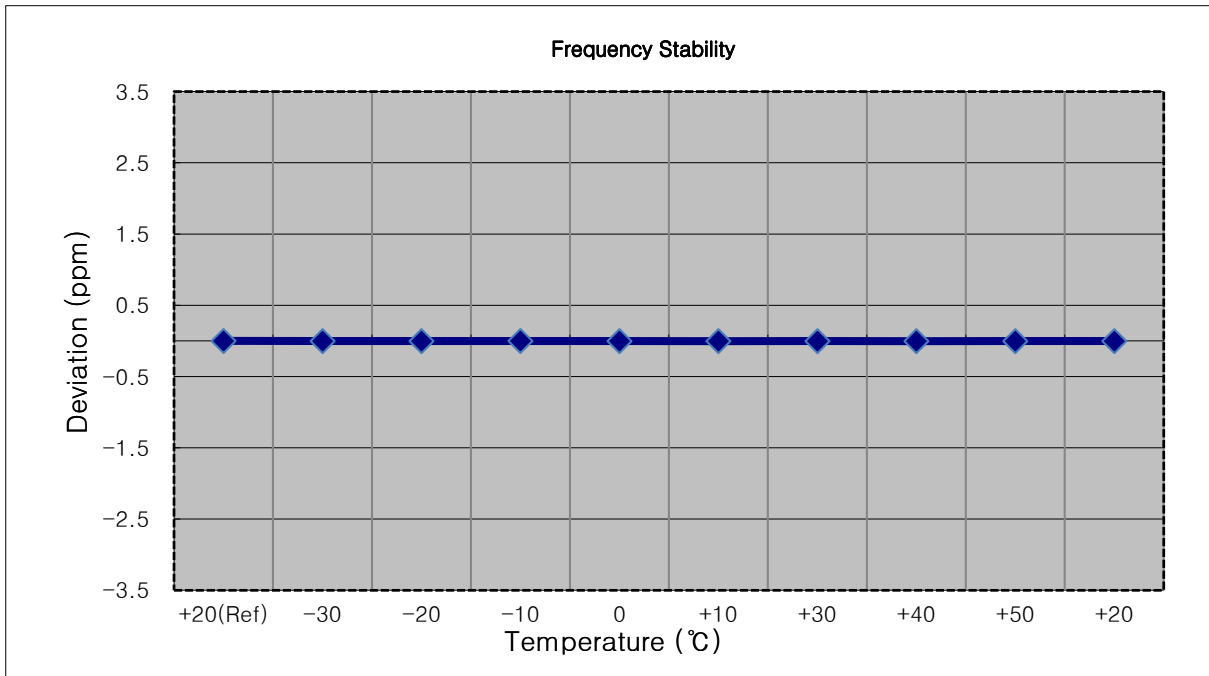


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- CHANNEL: 40620 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 003	0.0	0.000 000	0.000
100%		-30	2593 000 007	3.7	0.000 000	0.001
100%		-20	2593 000 000	-3.0	0.000 000	-0.001
100%		-10	2593 000 001	-2.5	0.000 000	-0.001
100%		0	2593 000 006	2.7	0.000 000	0.001
100%		+10	2592 999 999	-4.3	0.000 000	-0.002
100%		+30	2592 999 998	-4.9	0.000 000	-0.002
100%		+40	2593 000 000	-2.8	0.000 000	-0.001
100%		+50	2593 000 000	-3.4	0.000 000	-0.001
85%	3.40	+20	2593 000 000	-3.2	0.000 000	-0.001

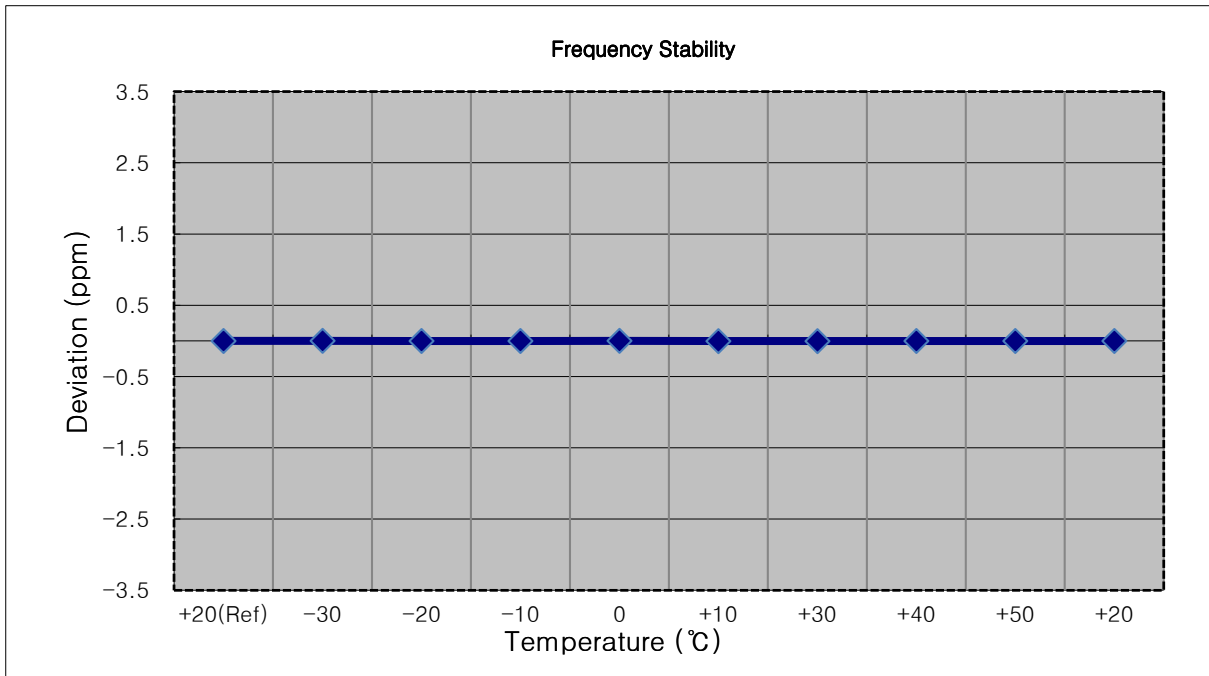


- MODE: LTE 41
- OPERATING FREQUENCY: 2687,500,000 Hz
- CHANNEL: 41565 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2687 499 996	0.0	0.000 000	0.000
100%		-30	2687 499 999	3.5	0.000 000	0.001
100%		-20	2687 500 000	3.9	0.000 000	0.001
100%		-10	2687 499 993	-3.1	0.000 000	-0.001
100%		0	2687 499 991	-4.9	0.000 000	-0.002
100%		+10	2687 500 001	5.5	0.000 000	0.002
100%		+30	2687 500 000	4.2	0.000 000	0.002
100%		+40	2687 499 999	3.6	0.000 000	0.001
100%		+50	2687 499 991	-4.9	0.000 000	-0.002
85%	3.40	+20	2687 499 998	2.8	0.000 000	0.001

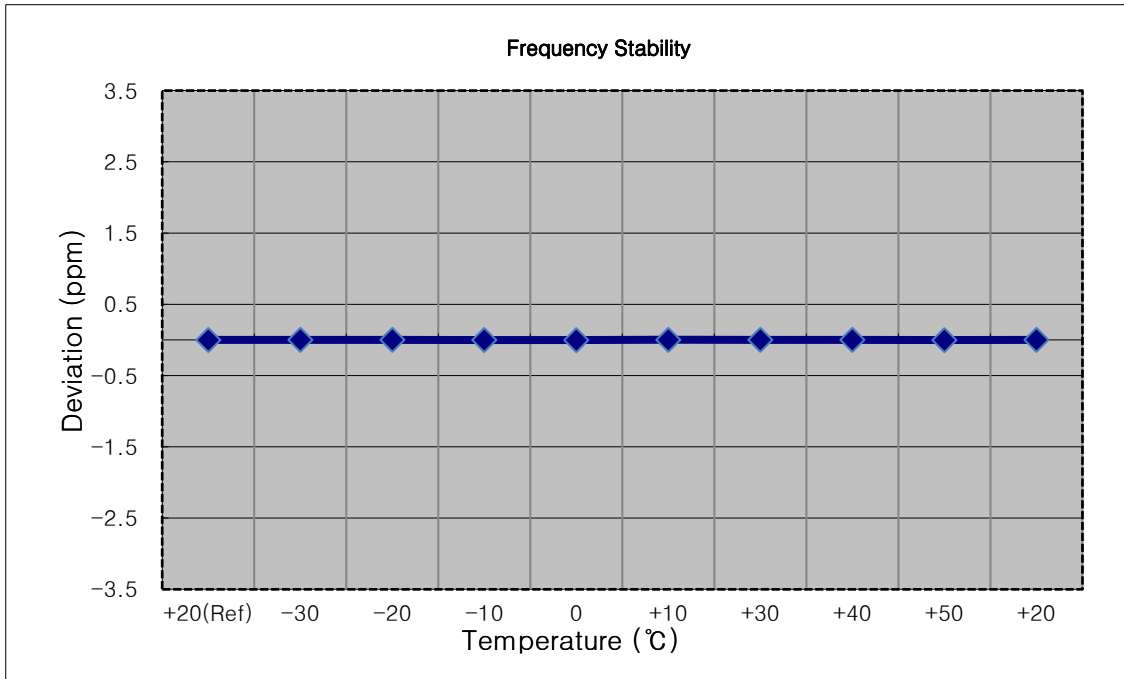


- MODE: LTE 41
- OPERATING FREQUENCY: 2685.000.000 Hz
- CHANNEL: 41540 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2684 999 995	0.0	0.000 000	0.000
100%		-30	2684 999 986	-9.2	0.000 000	-0.003
100%		-20	2684 999 988	-7.2	0.000 000	-0.003
100%		-10	2684 999 988	-7.2	0.000 000	-0.003
100%		0	2684 999 987	-7.4	0.000 000	-0.003
100%		+10	2684 999 986	-9.1	0.000 000	-0.003
100%		+30	2684 999 990	-4.9	0.000 000	-0.002
100%		+40	2684 999 992	-3.2	0.000 000	-0.001
100%		+50	2684 999 990	-4.7	0.000 000	-0.002
85%	3.40	+20	2684 999 989	-6.1	0.000 000	-0.002

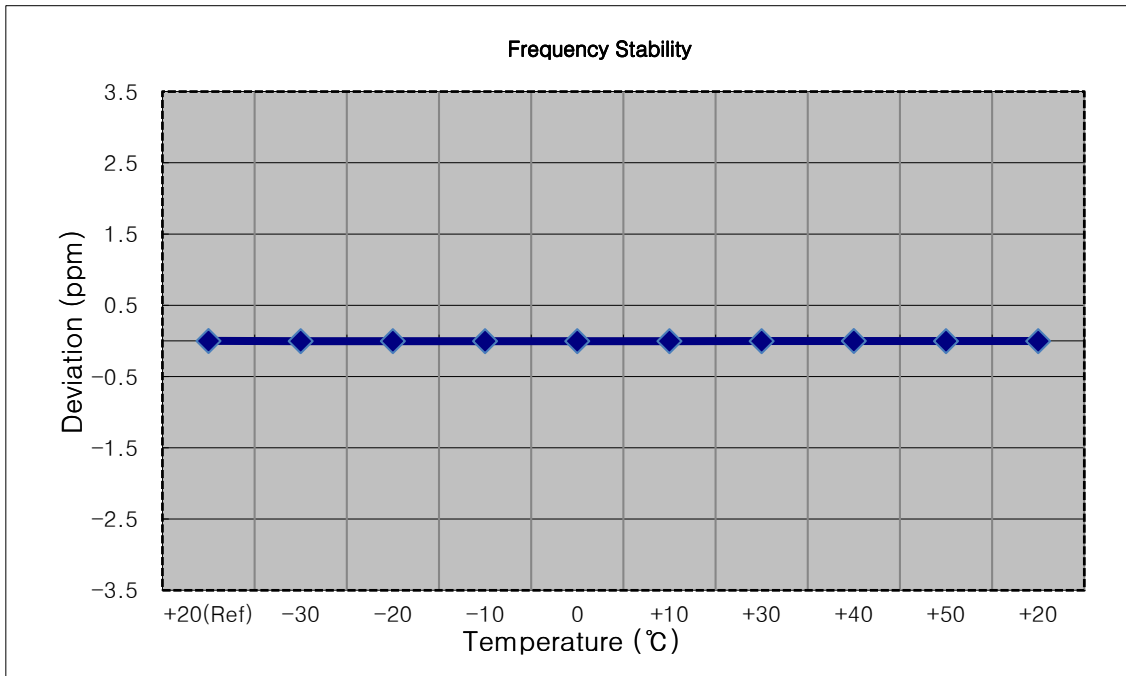


- MODE: LTE 41
- OPERATING FREQUENCY: 2682,000,000 Hz
- CHANNEL: 41515 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2682 499 996	0.0	0.000 000	0.000
100%		-30	2682 499 990	-5.8	0.000 000	-0.002
100%		-20	2682 499 992	-3.4	0.000 000	-0.001
100%		-10	2682 499 991	-5.1	0.000 000	-0.002
100%		0	2682 499 991	-4.3	0.000 000	-0.002
100%		+10	2682 499 988	-7.9	0.000 000	-0.003
100%		+30	2682 499 990	-5.3	0.000 000	-0.002
100%		+40	2682 499 991	-4.7	0.000 000	-0.002
100%		+50	2682 499 989	-6.5	0.000 000	-0.002
85%	3.40	+20	2682 499 991	-4.4	0.000 000	-0.002

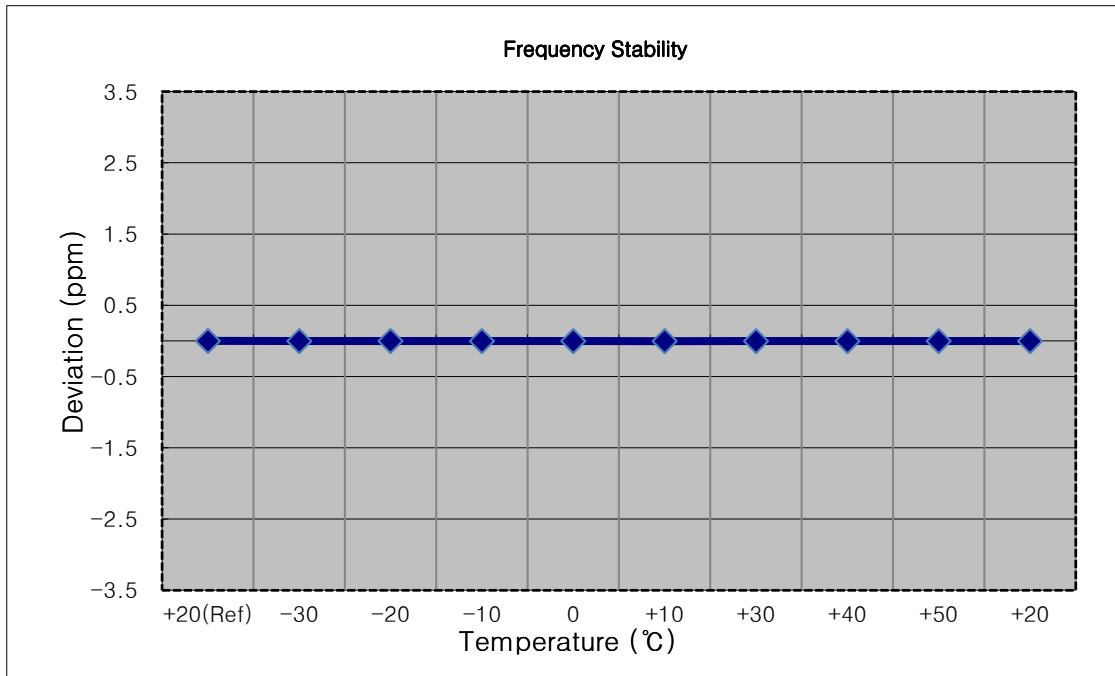

- MODE: LTE 41
- OPERATING FREQUENCY: 2680,000,000 Hz
- CHANNEL: 41490 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2680 000 005	0.0	0.000 000	0.000
100%		-30	2679 999 999	-5.7	0.000 000	-0.002
100%		-20	2680 000 002	-3.1	0.000 000	-0.001
100%		-10	2680 000 001	-4.2	0.000 000	-0.002
100%		0	2680 000 000	-5.3	0.000 000	-0.002
100%		+10	2680 000 000	-5.0	0.000 000	-0.002
100%		+30	2680 000 001	-4.6	0.000 000	-0.002
100%		+40	2680 000 000	-5.3	0.000 000	-0.002
100%		+50	2679 999 999	-6.5	0.000 000	-0.002
85%	3.40	+20	2680 000 000	-5.6	0.000 000	-0.002

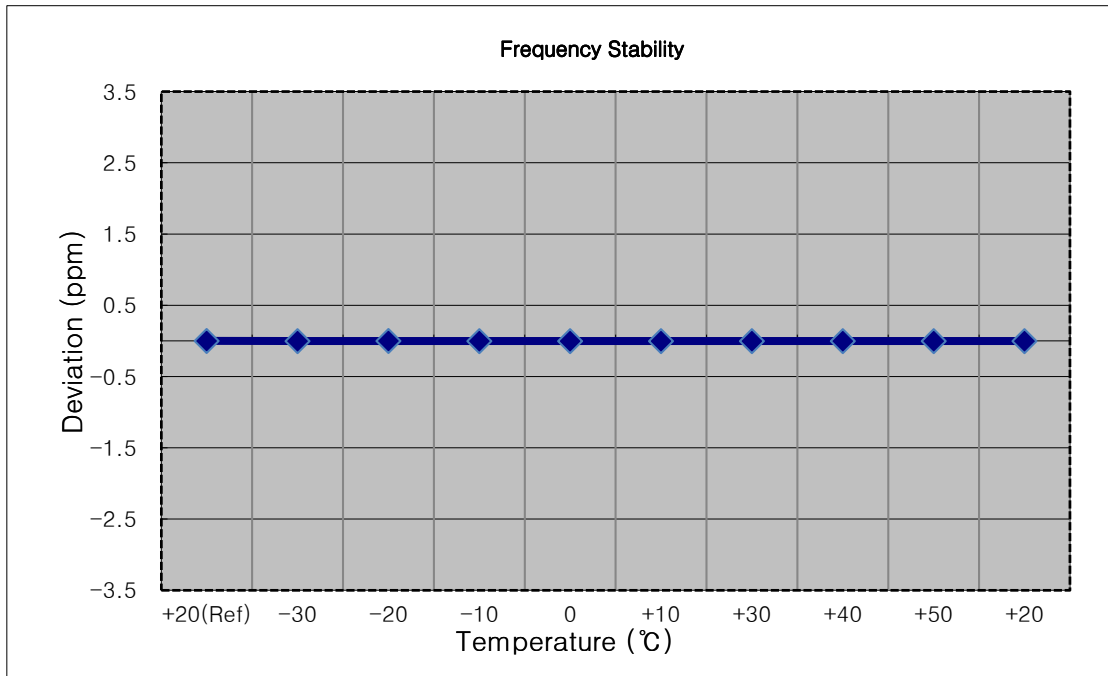



## 8.7 GEO-LOCATION MECHANISM


The device uses a geo-location mechanism based on the cellular MCC codes in order to only enable certain LTE bands when the device is not in the USA.

The validation of this mechanism is provided below. The device was configured for cellular communications to a test set and the MCC code was adjusted on the test set between the US MCC and then an MCC code valid for a country where the LTE band is supported.

Band	MCC = USA	MCC = non US
7	Did not connect	Connected (Canada)
38	Did not connect	Connected (Canada)
40	Did not connect	Connected (Canada)

The verification tests confirmed the operational of the geo-location mechanism.


**Verification test**

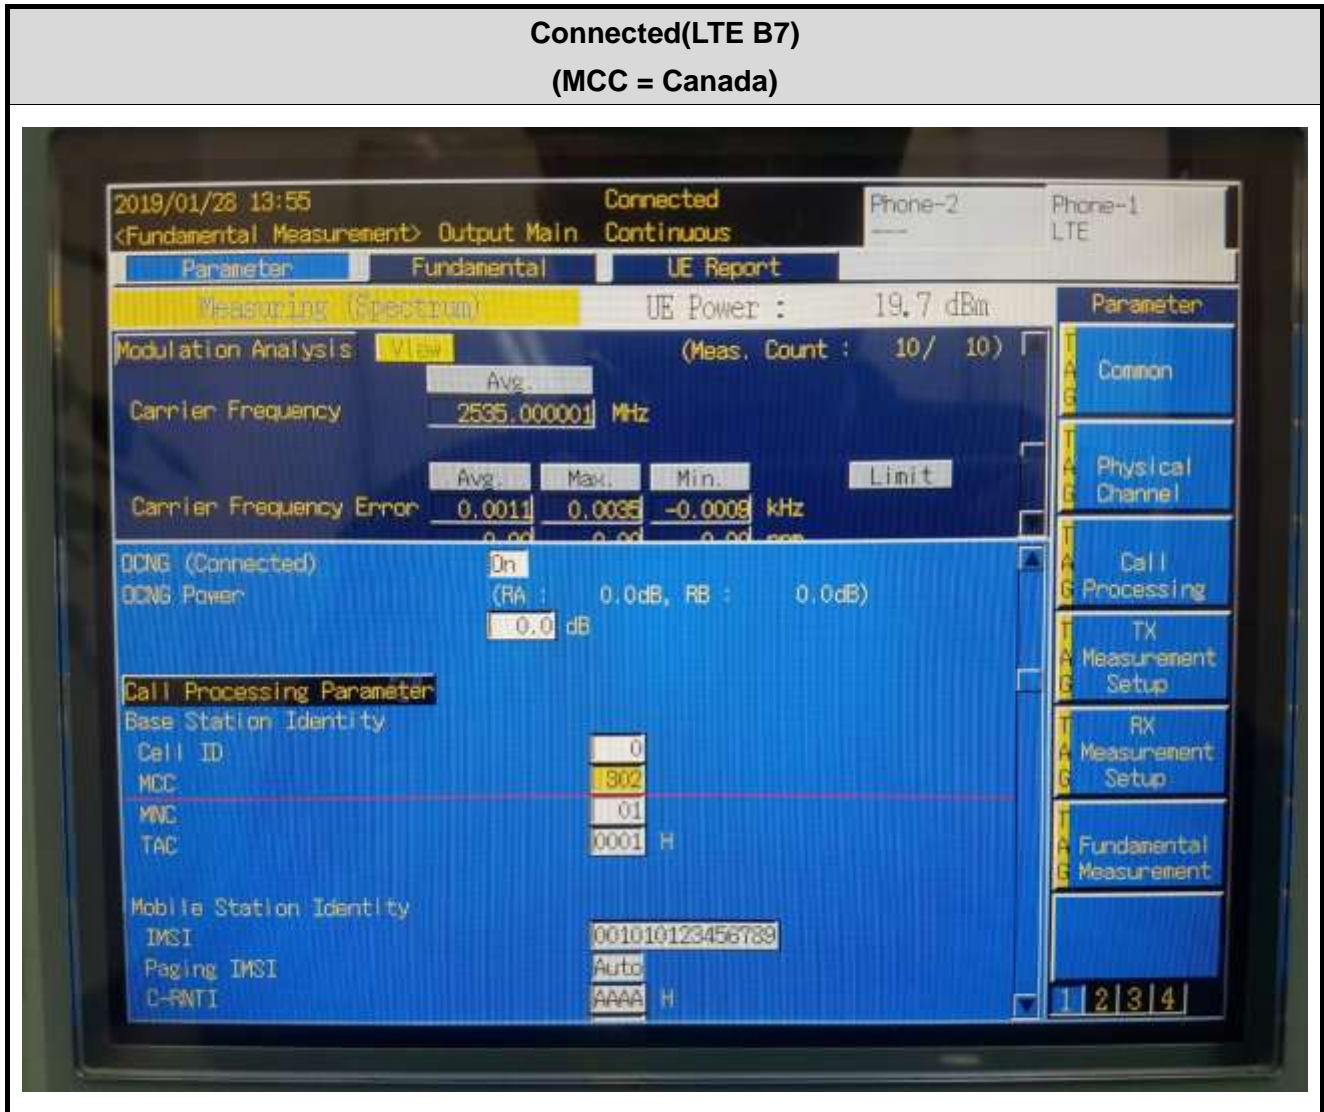










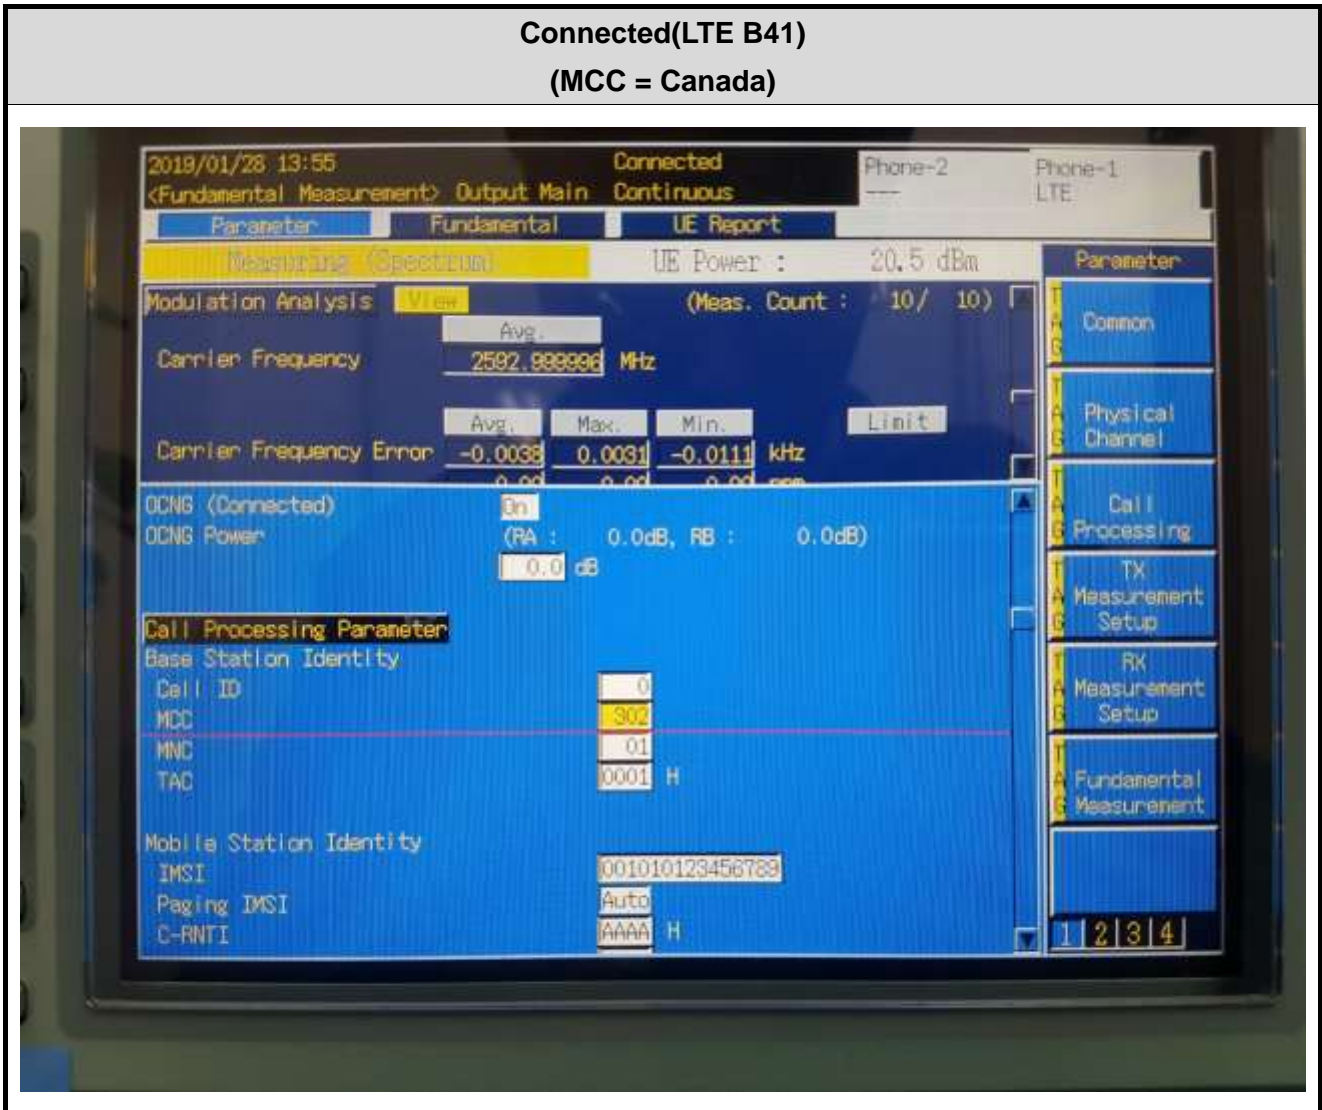

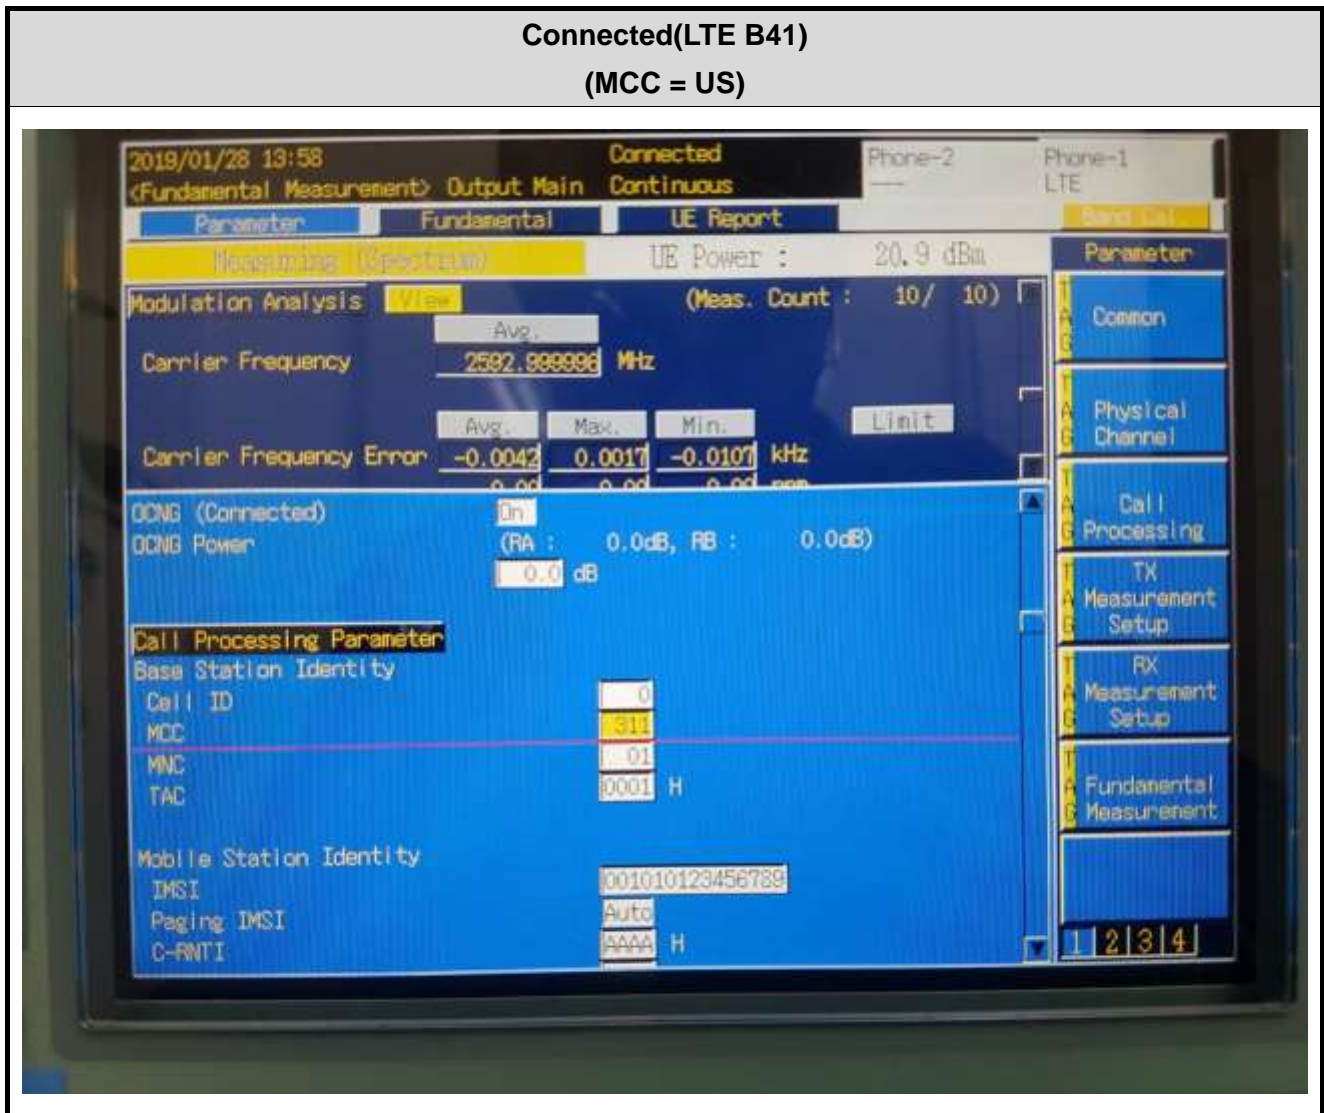

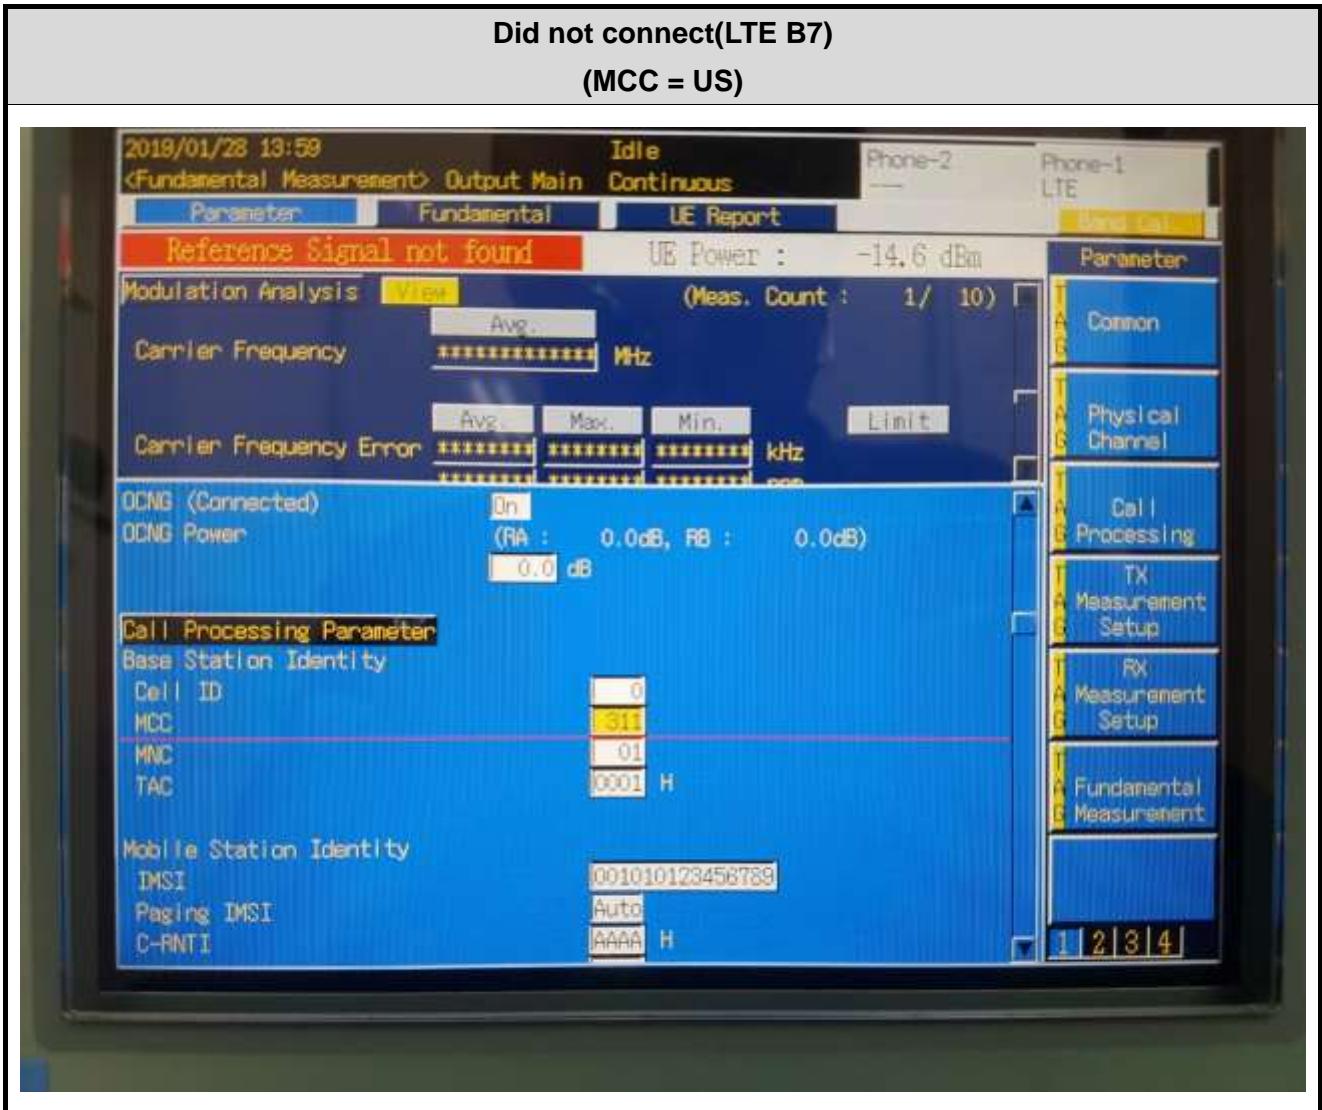


**Did not connect(LTE B38)  
(MCC = US)**

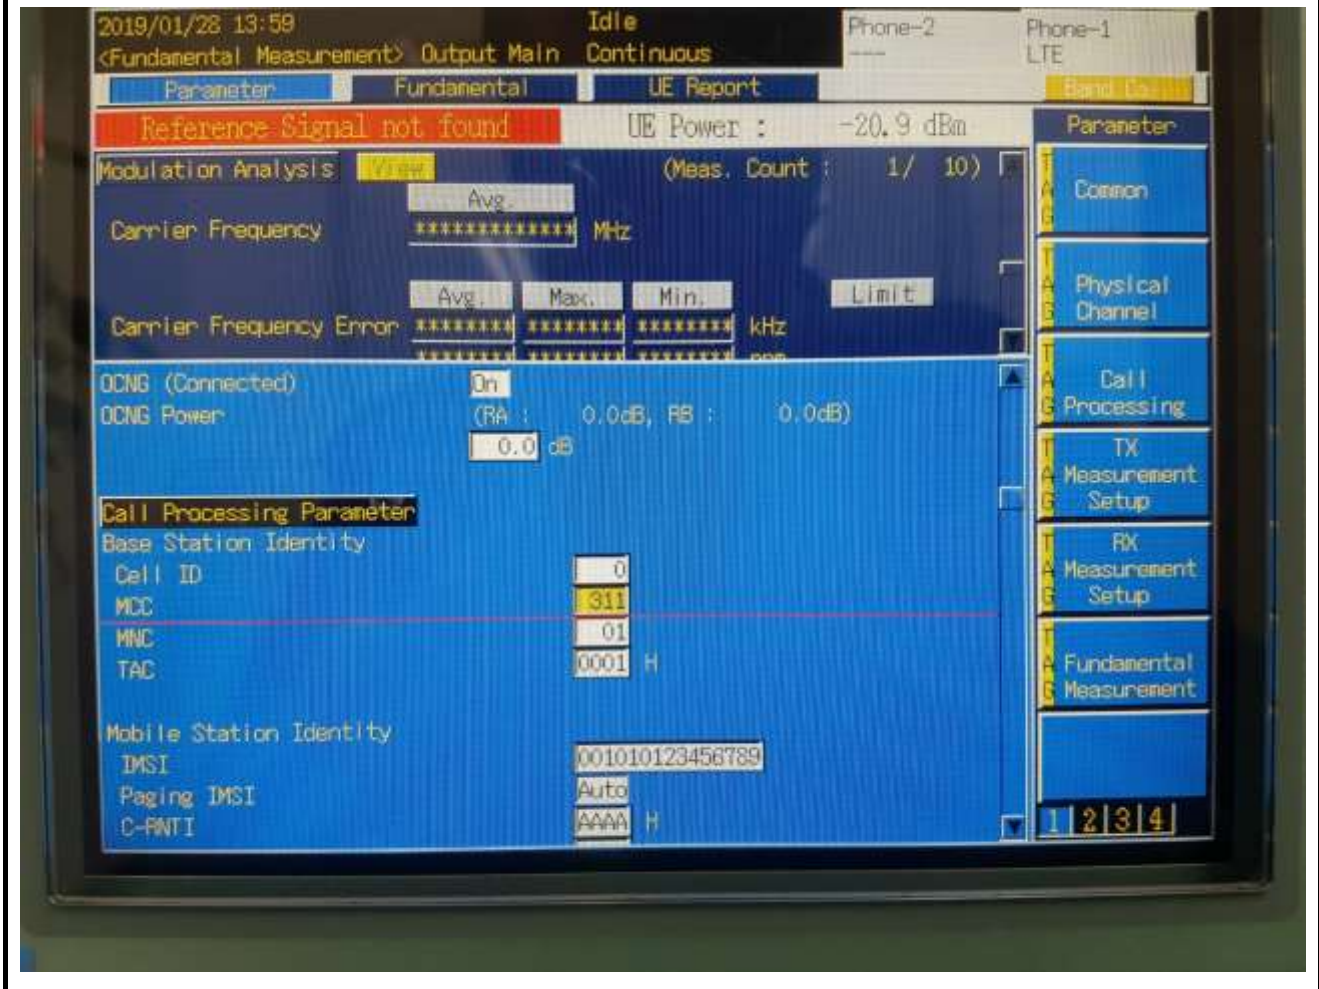




**Did not connect(LTE B40)  
(MCC = US)**

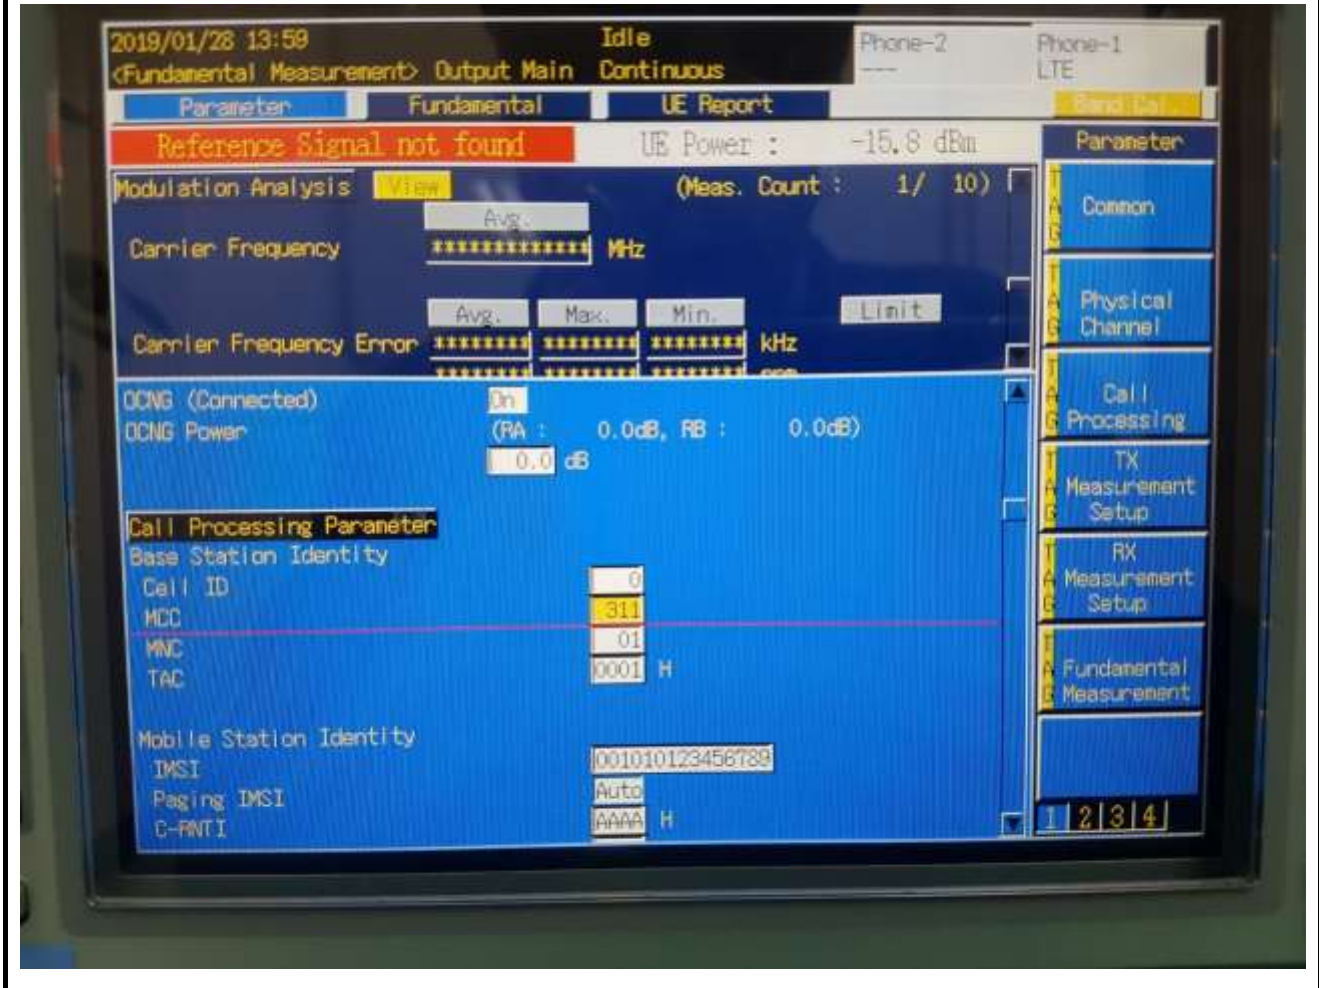


## 9. TEST PLOTS


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25)

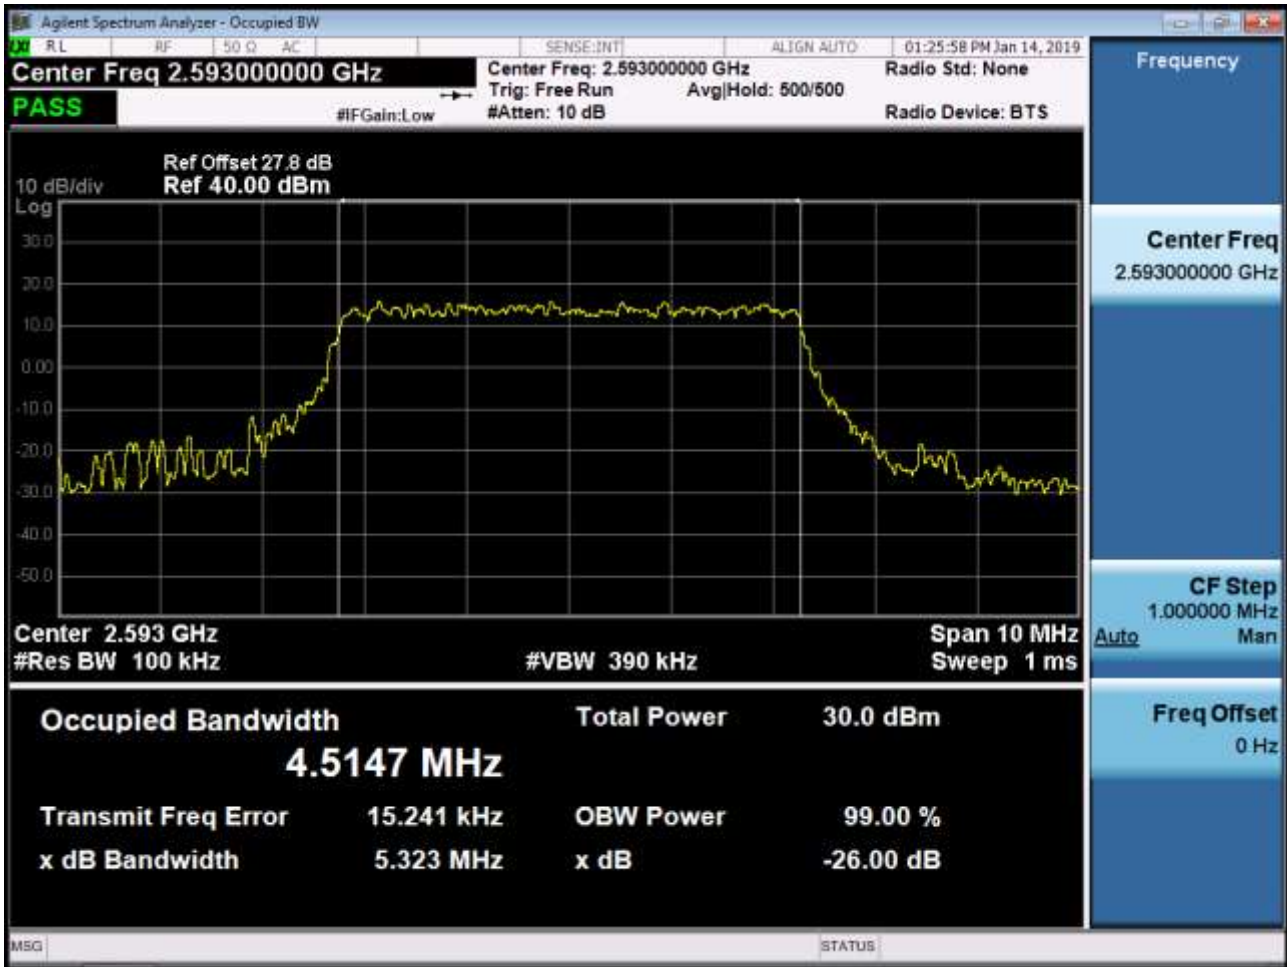


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25)

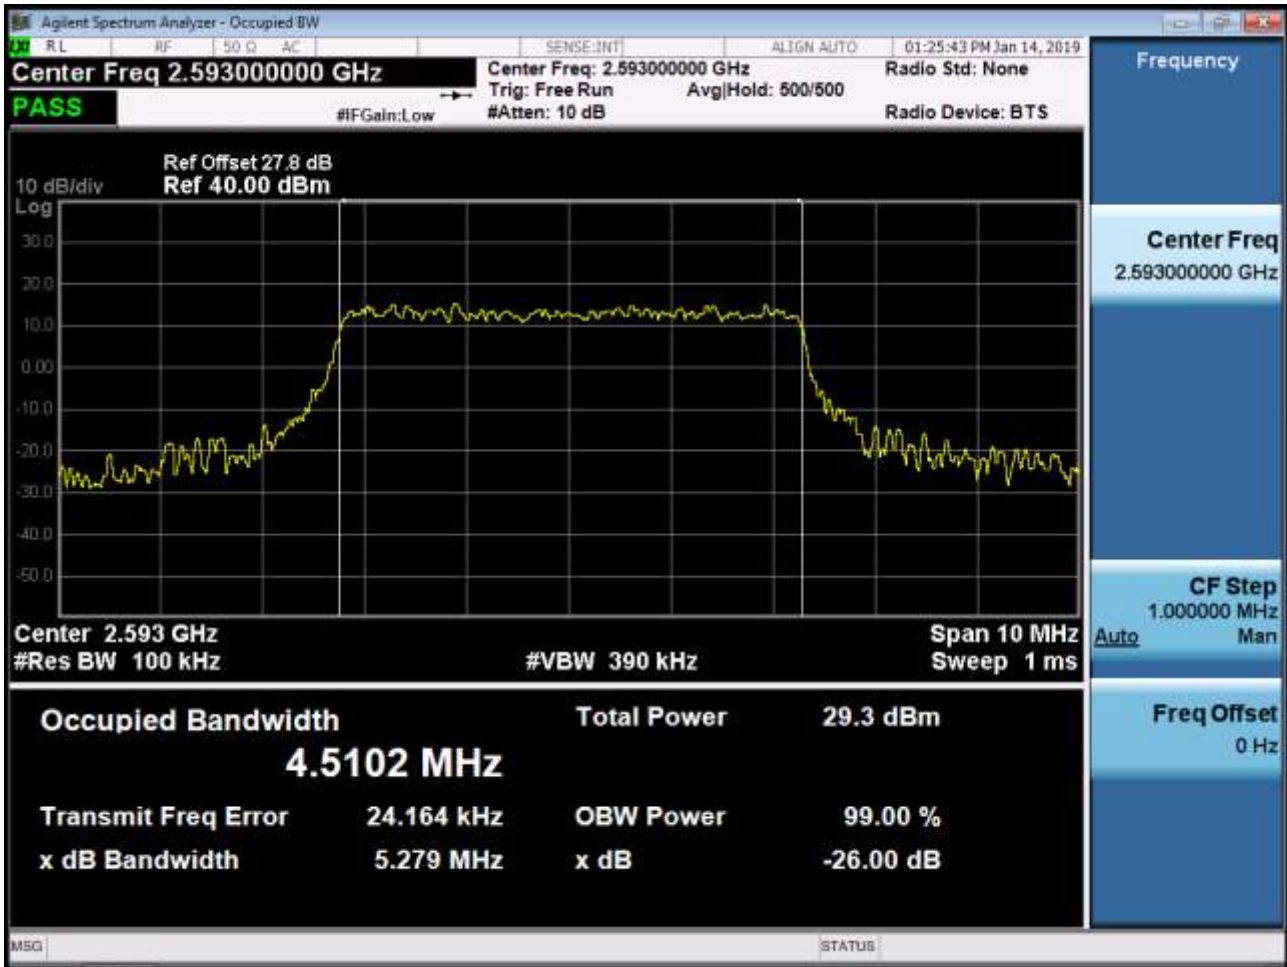

BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50)

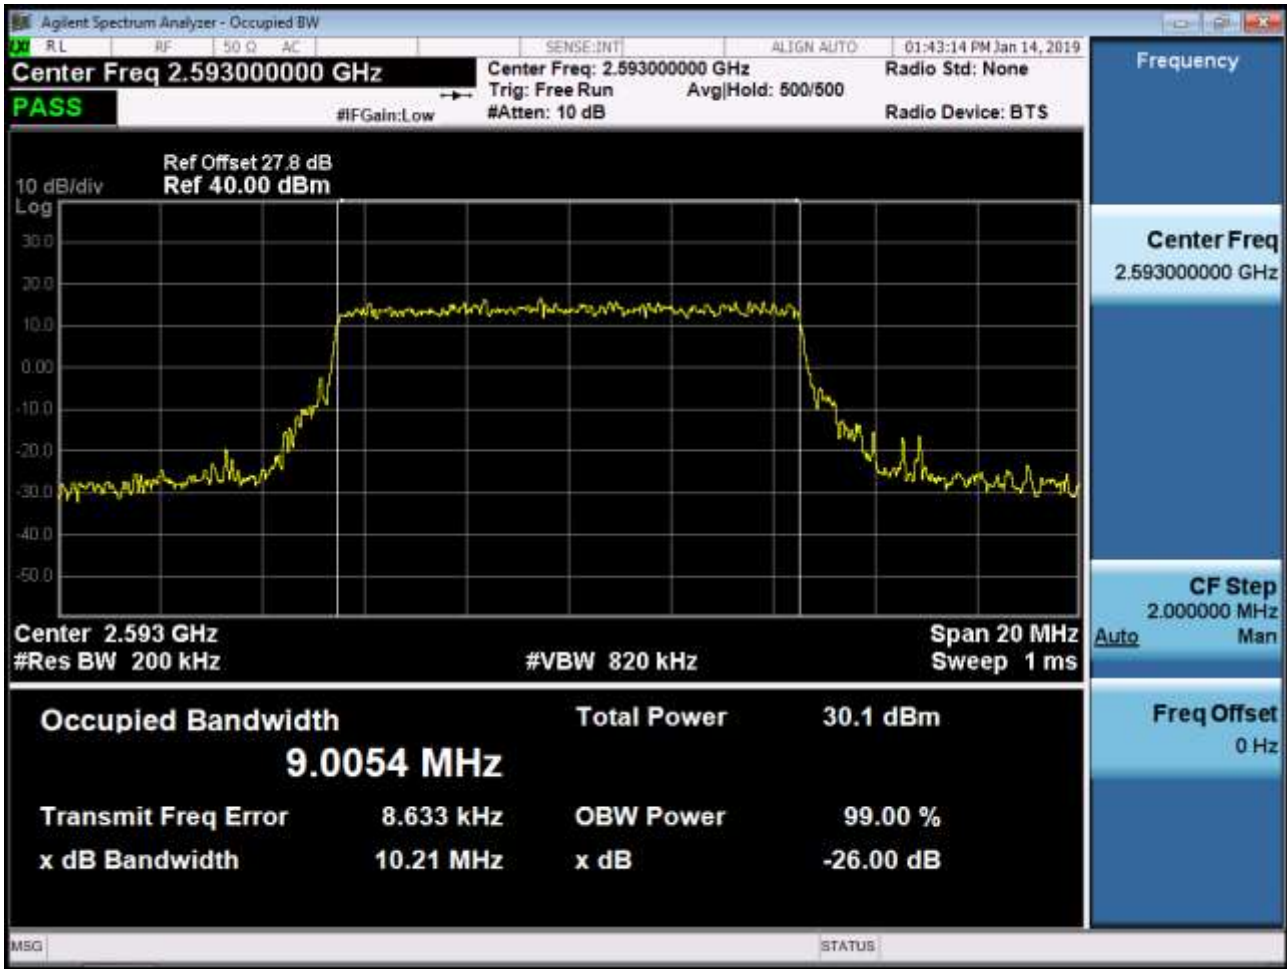


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50)

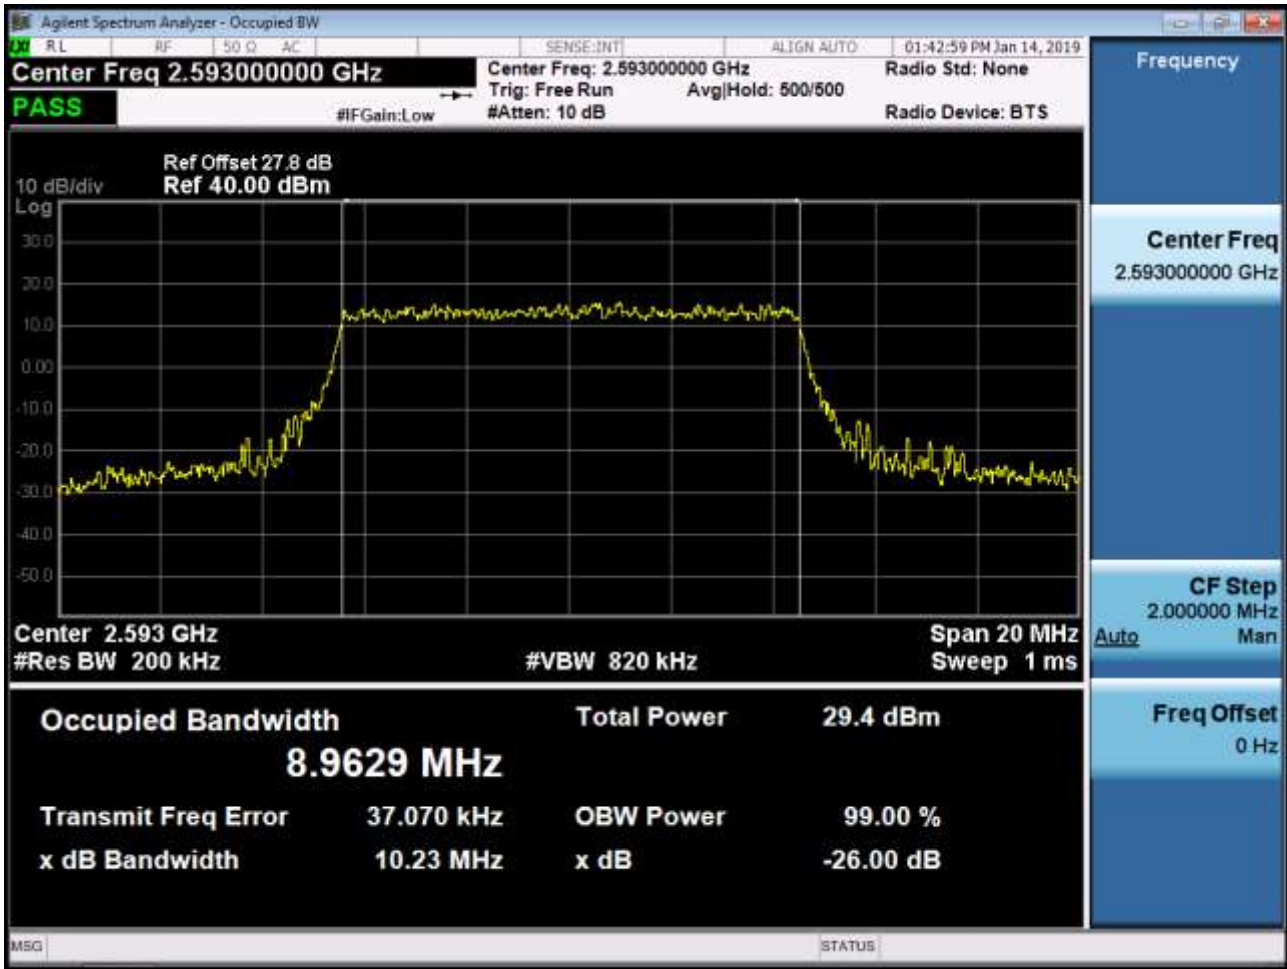




BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75)

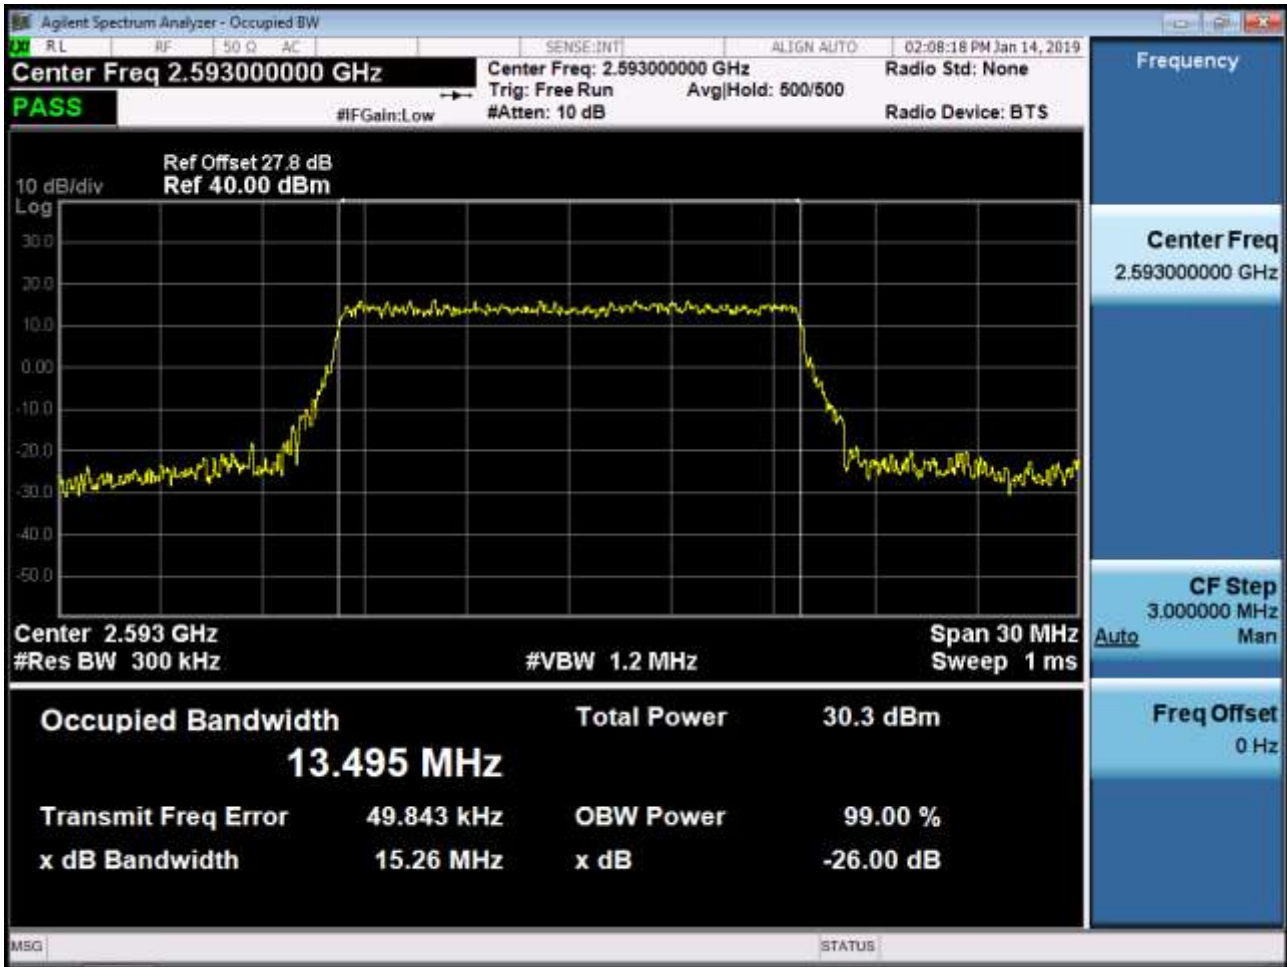


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75)

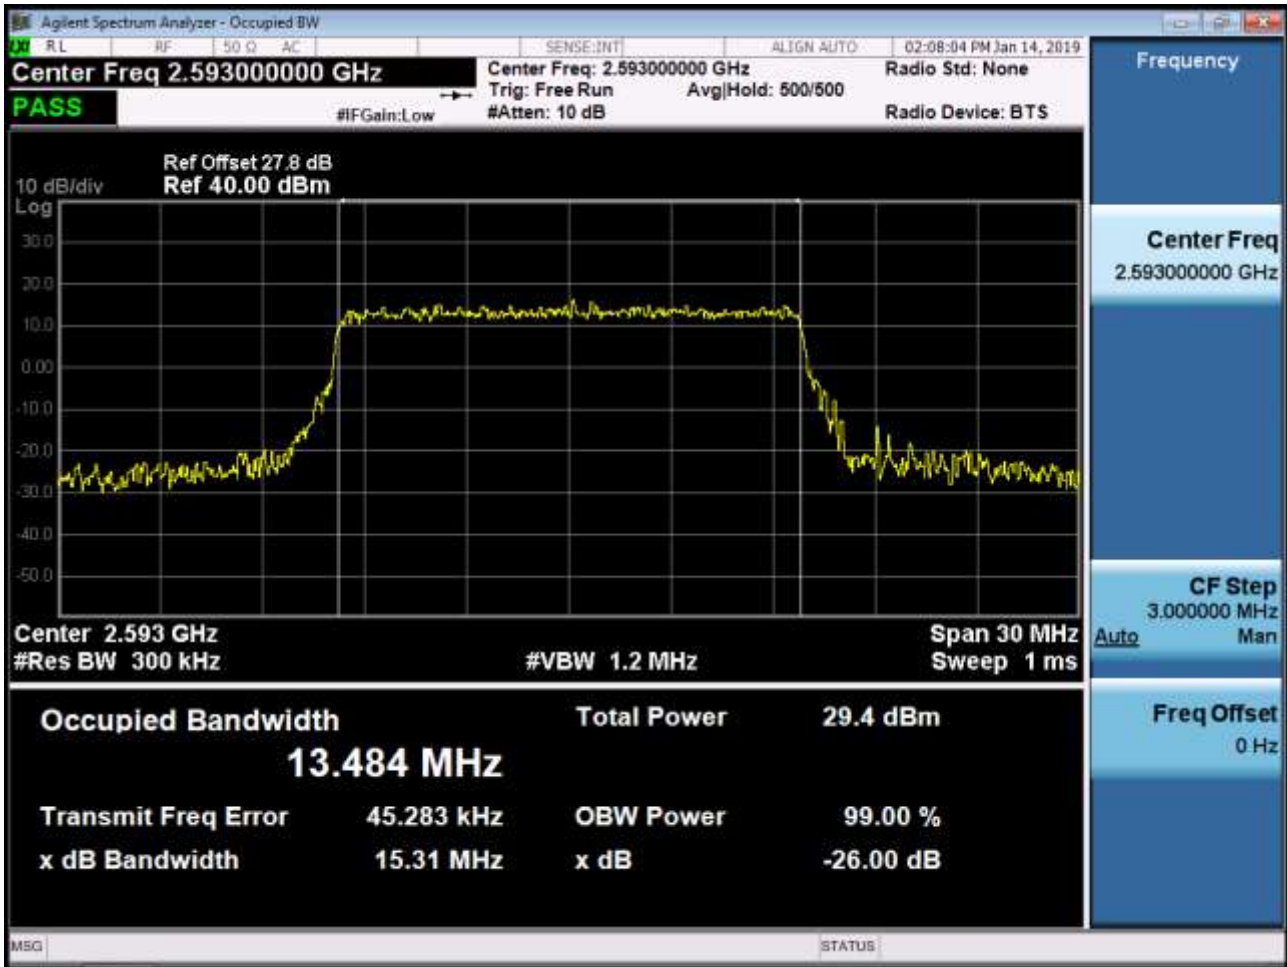





BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100)

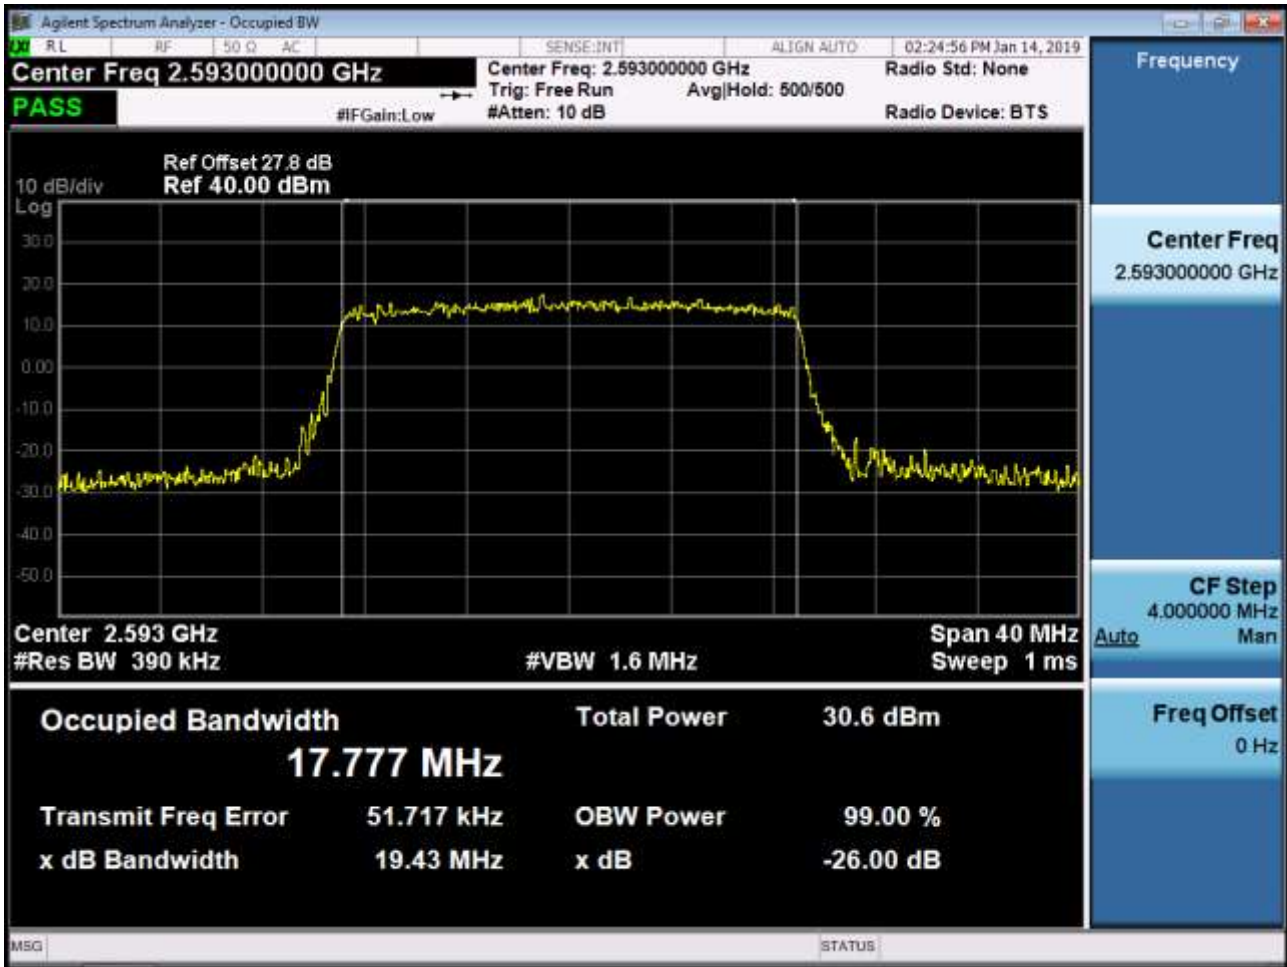


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100)

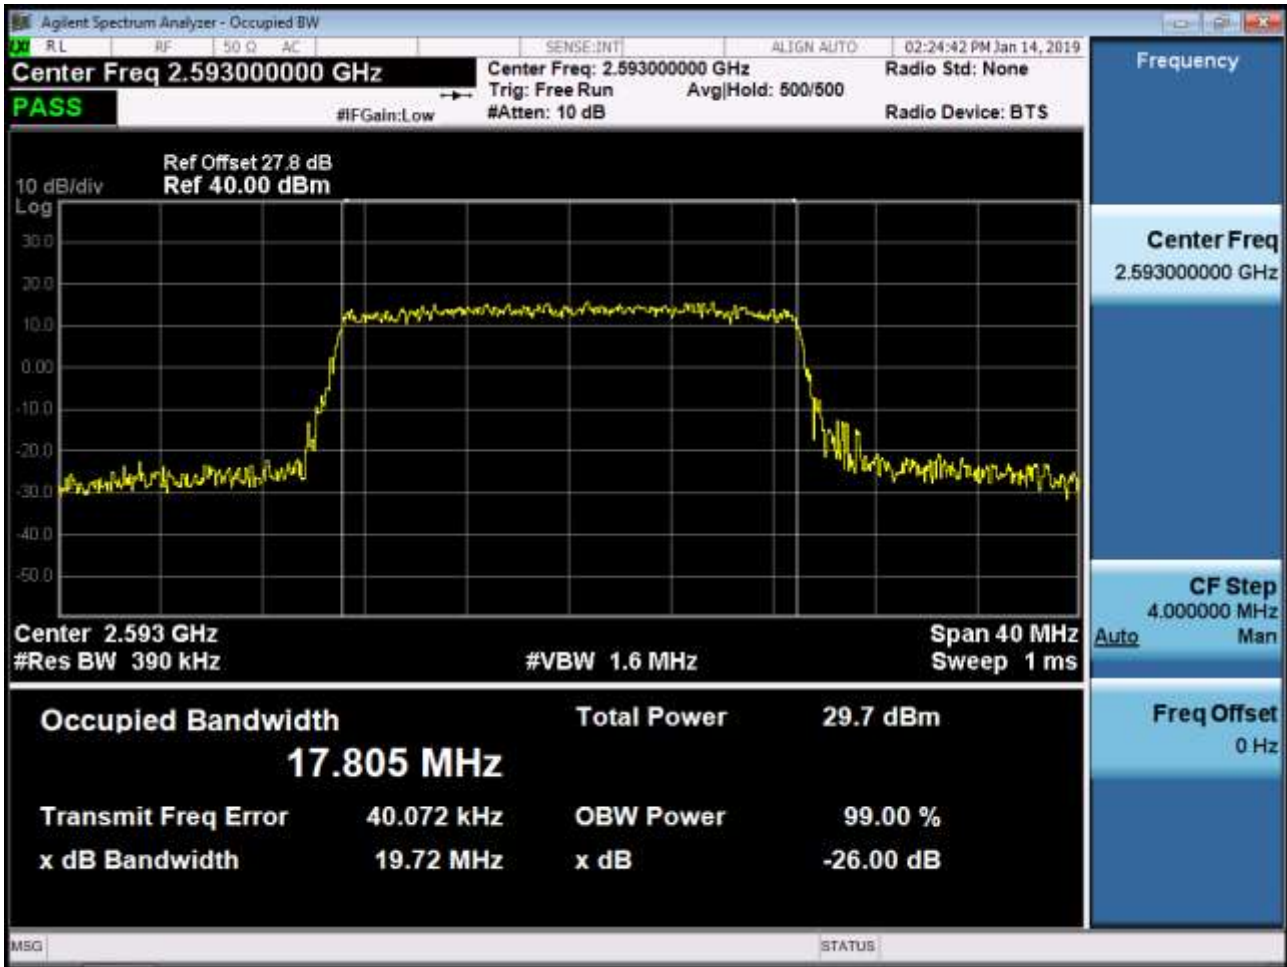


BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25)-1

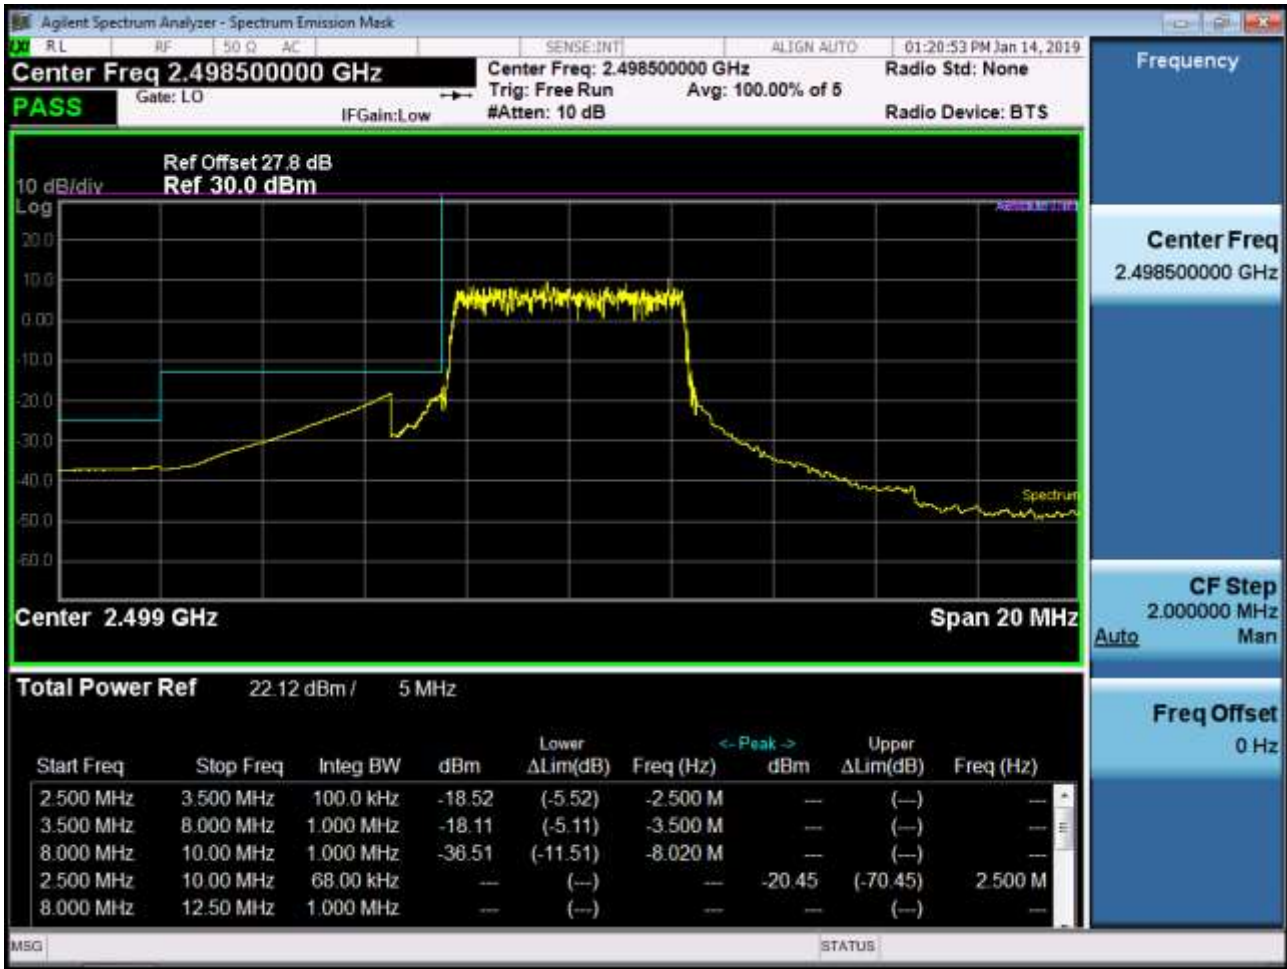

BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25)-2

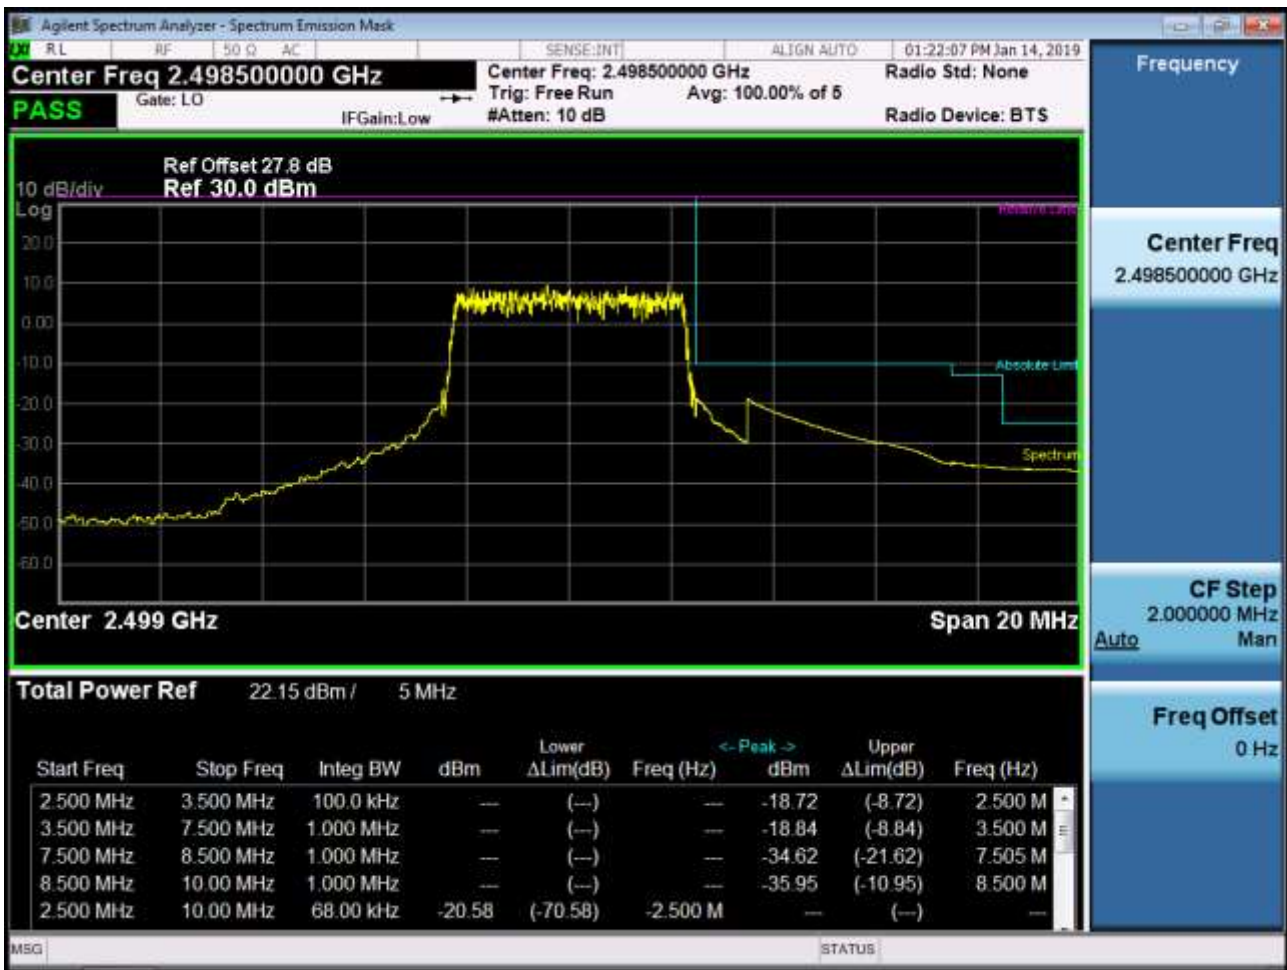


BAND 41. Mid Channel Edge Plot (5 MHz Ch.40620 QPSK RB 25)

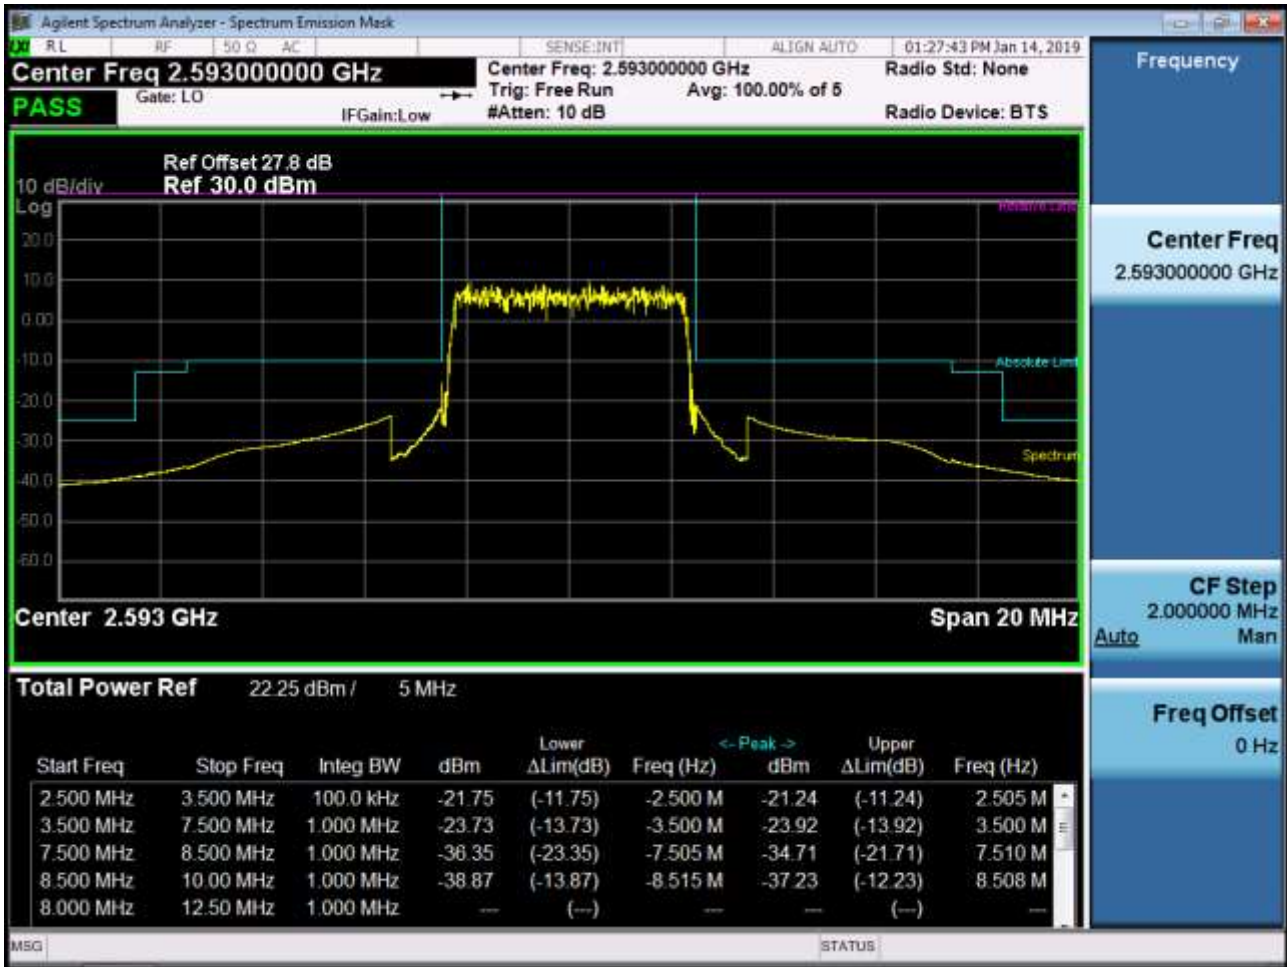




BAND 41. High Channel Edge Plot (5 MHz Ch.41565 QPSK RB 25)

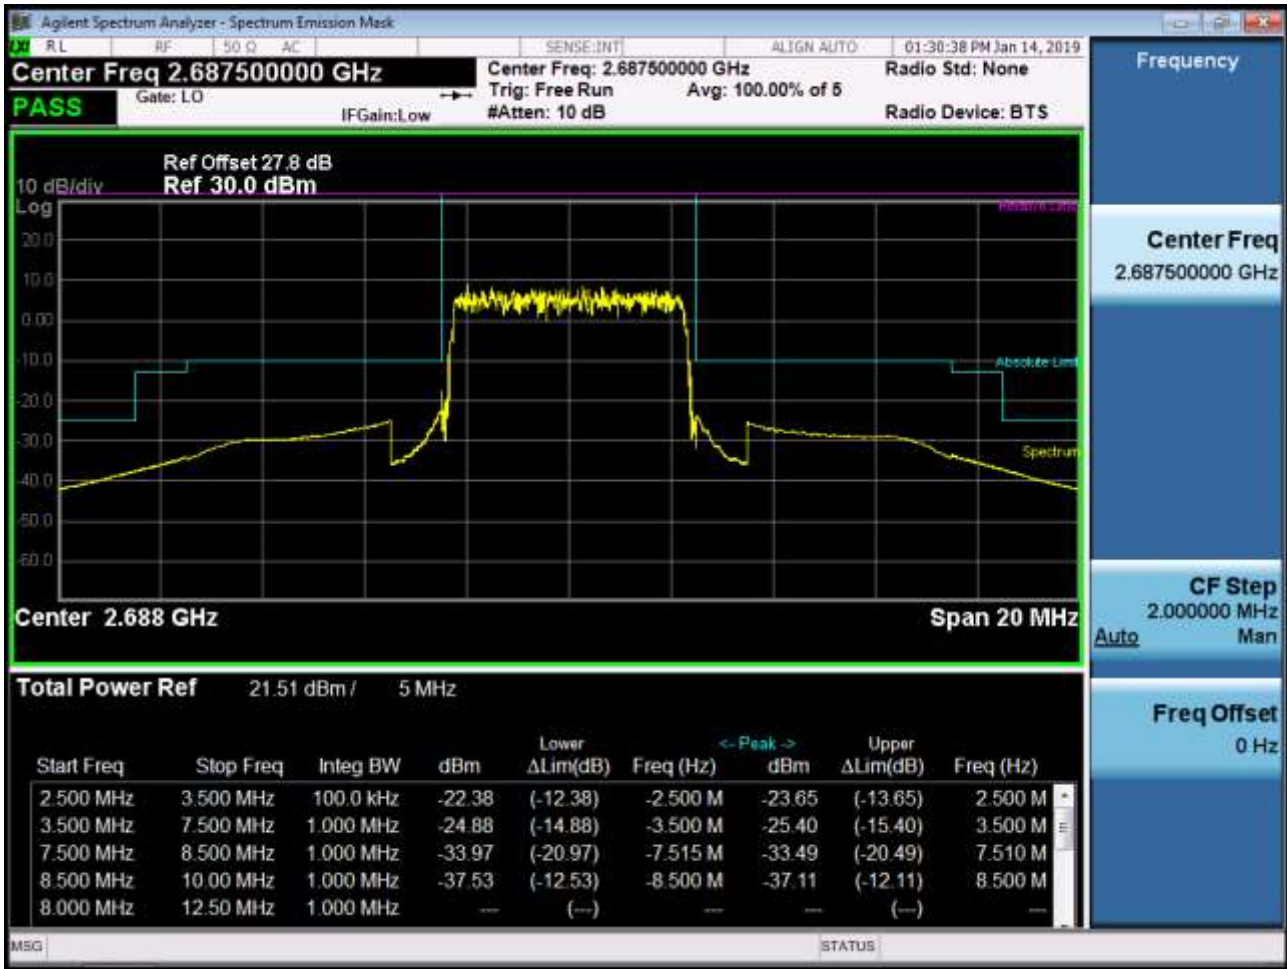

BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 50)-1



BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 50)-2

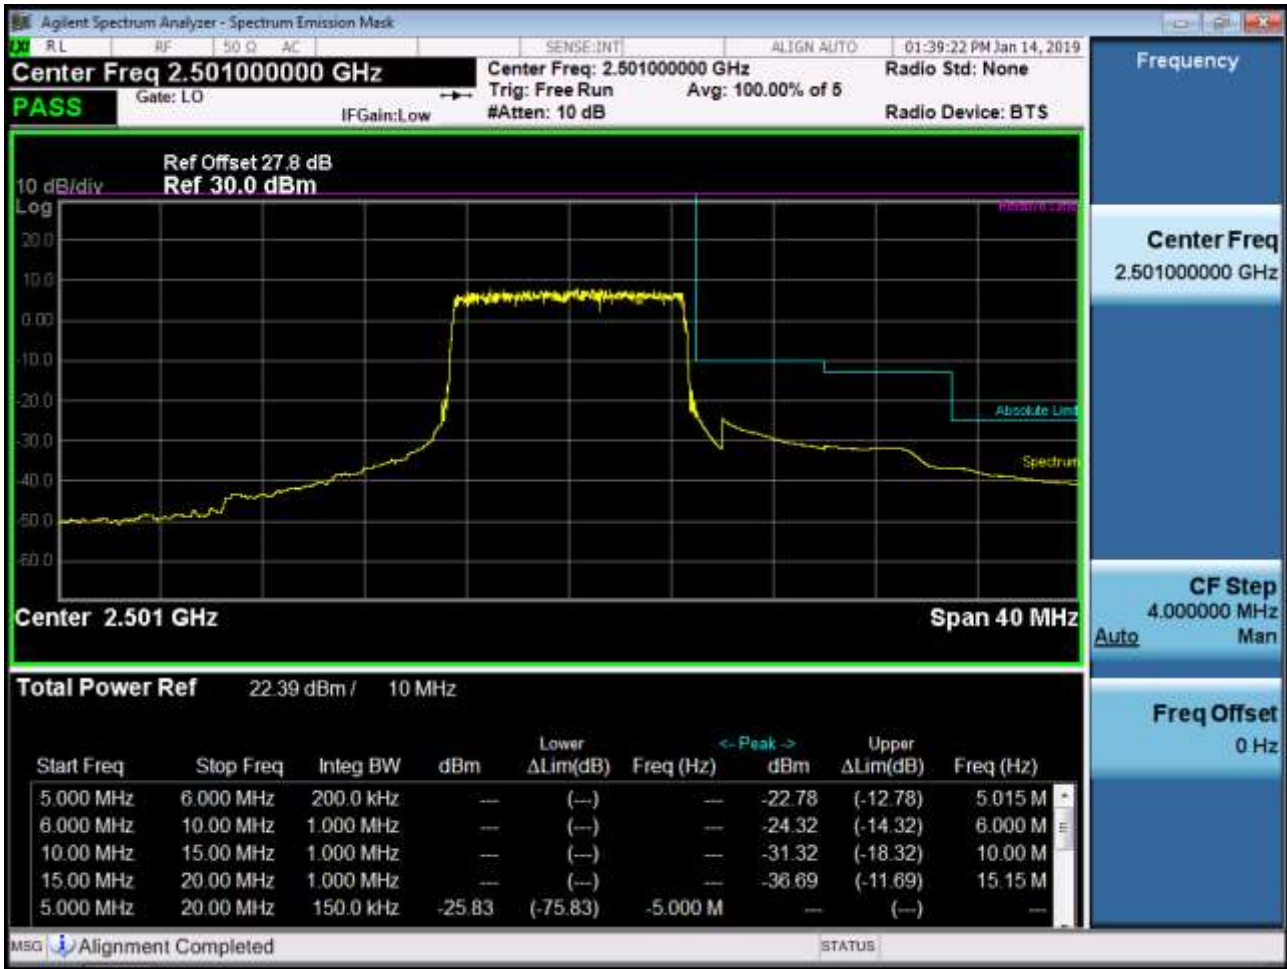



BAND 41. Mid Channel Edge Plot (10 MHz Ch.40620 QPSK RB 50)




BAND 41. High Channel Edge Plot (10 MHz Ch.41540 QPSK RB 50)



BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 75)-1



BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 75)-2

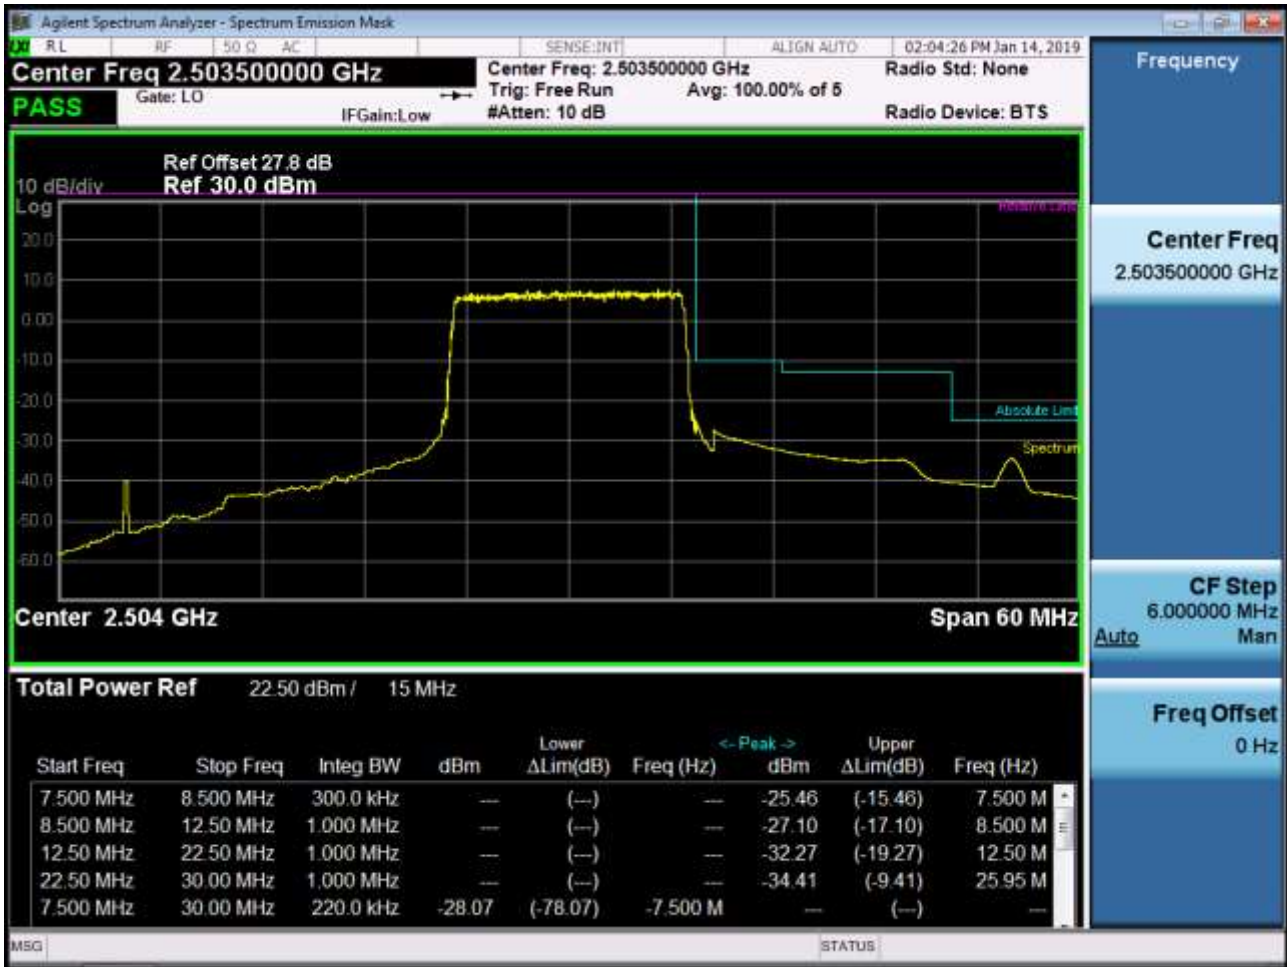

BAND 41. Mid Channel Edge Plot (15 MHz Ch.40620 QPSK RB 75)





BAND 41. High Channel Edge Plot (15 MHz Ch.41515 QPSK RB 75)



BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 100)-1



BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 100)-2






BAND 41. Mid Channel Edge Plot (20 MHz Ch.40620 QPSK RB 100)



BAND 41. High Channel Edge Plot (20 MHz Ch.41490 QPSK RB 100)




BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.39675 QPSK RB 1, Offset 0)

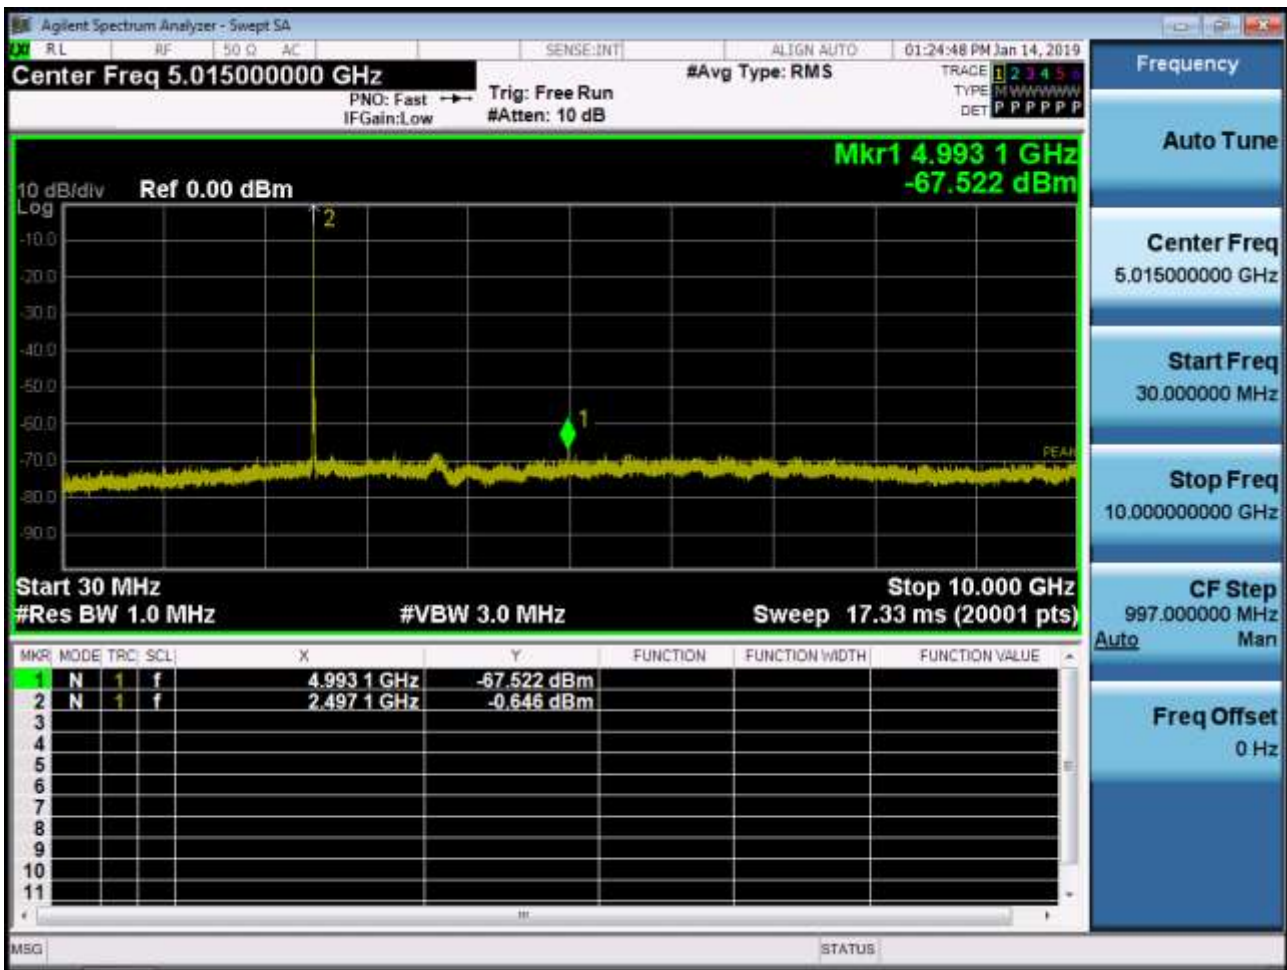

BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 39675 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.40620 QPSK RB 1, Offset 0)

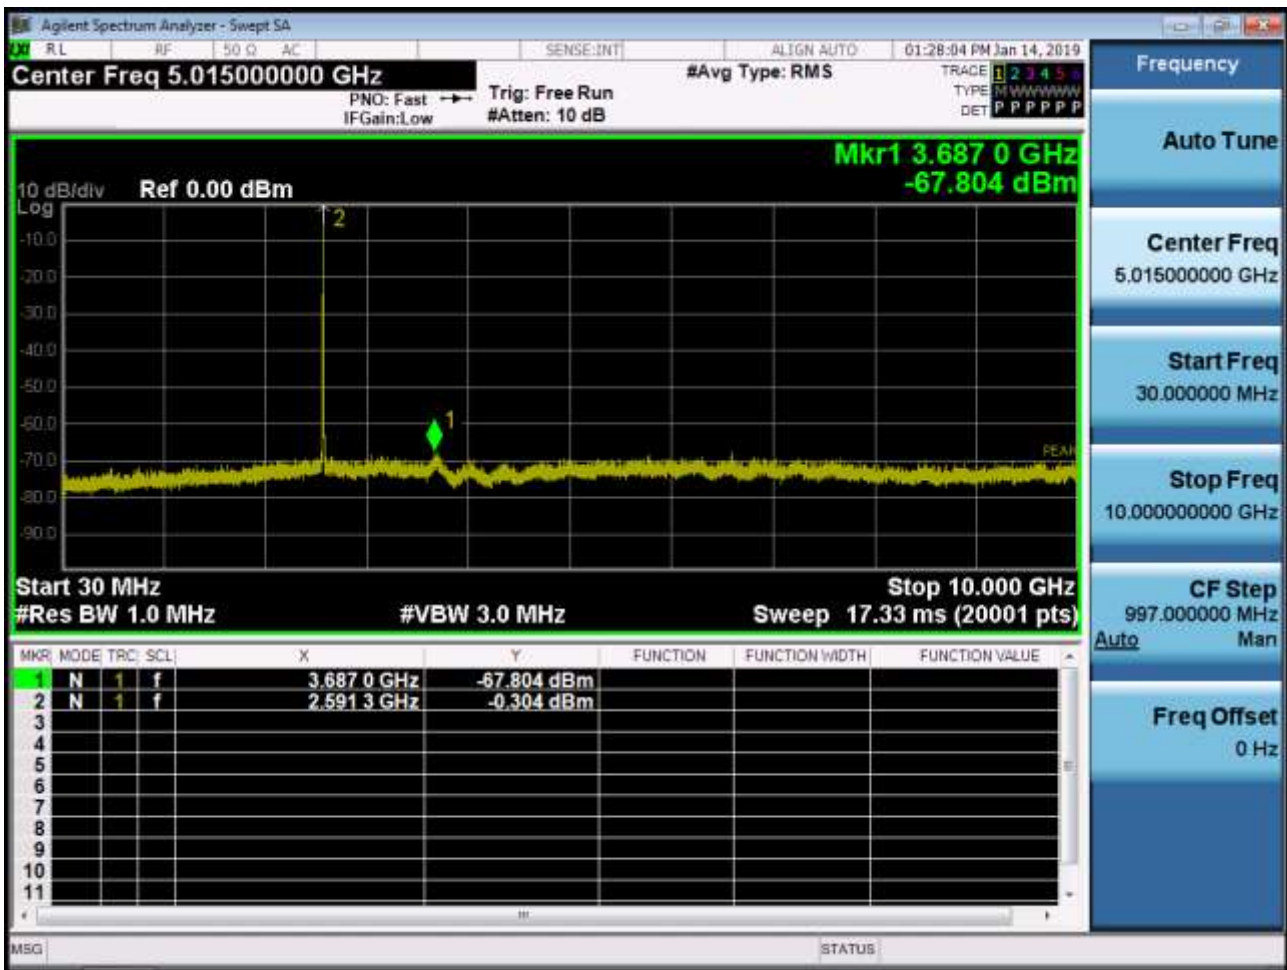




BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 40620 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.41565 QPSK RB 1, Offset 0)

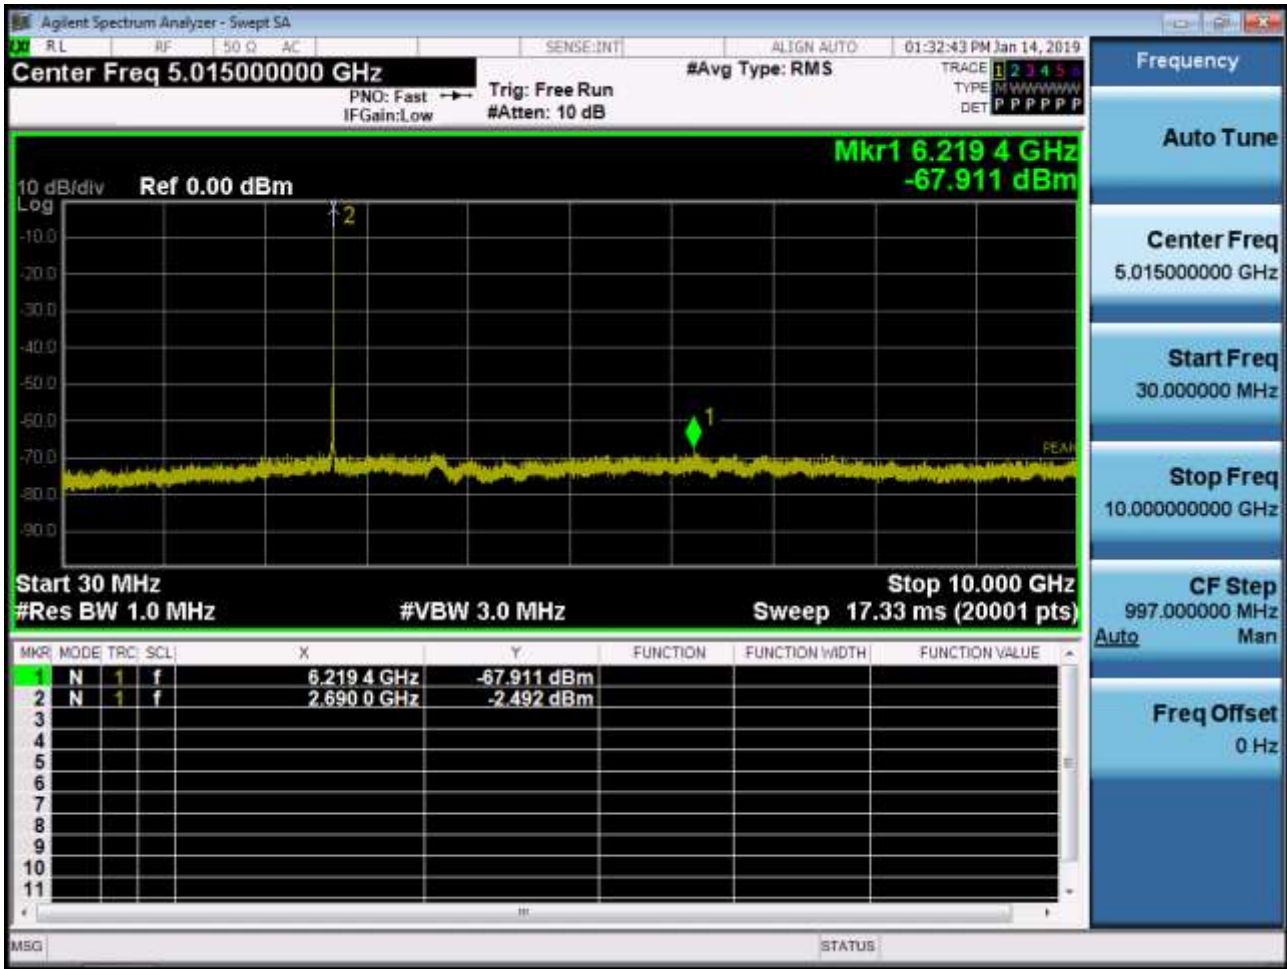


BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 41565 QPSK RB 1, Offset 0)






BAND 41. Conducted Spurious Plot 3 (5 MHz Ch. 41565 QPSK RB 1, Offset 0)

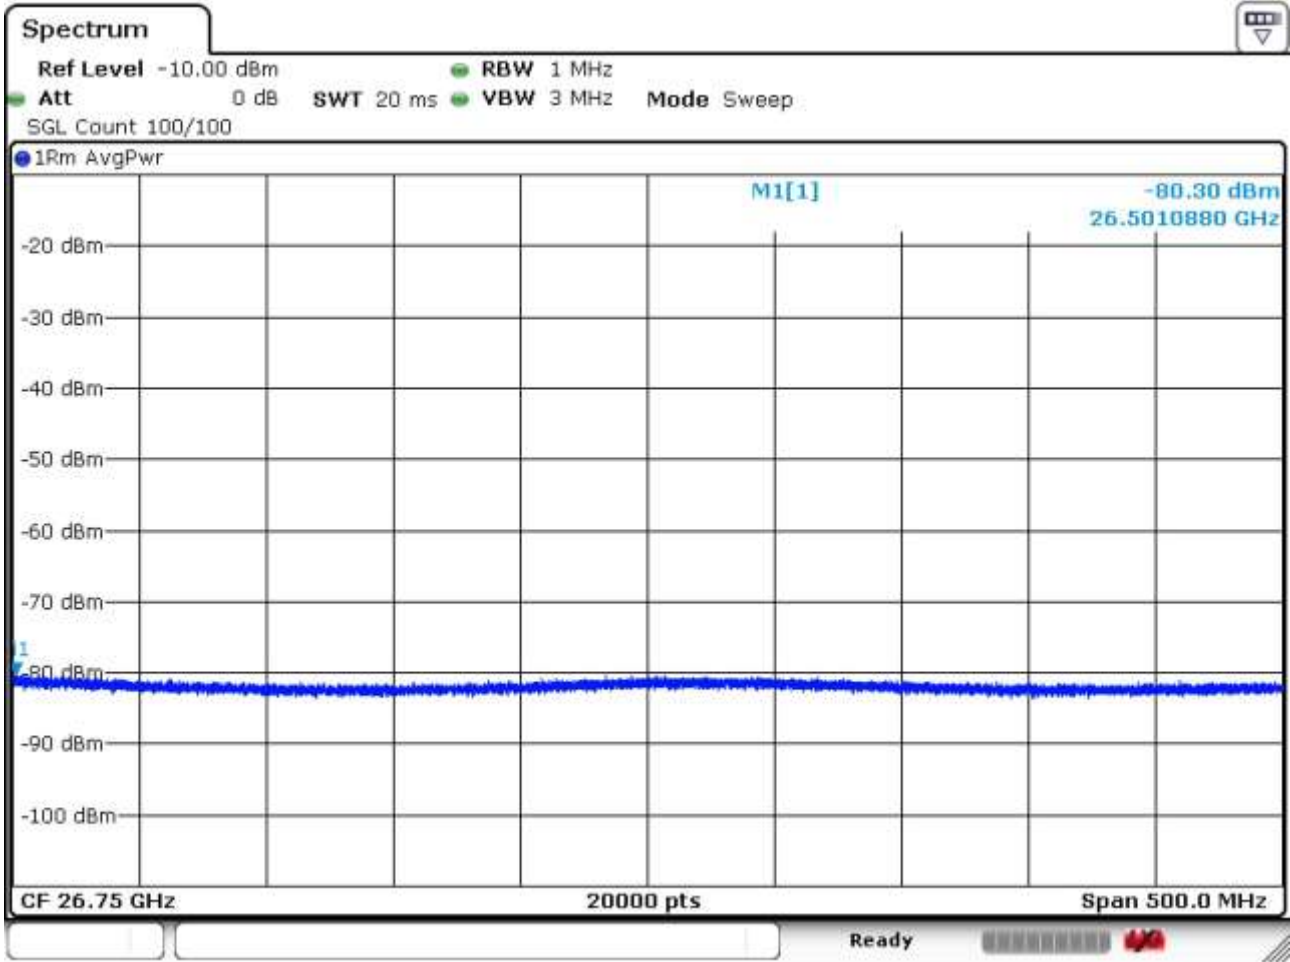


BAND 41. Conducted Spurious Plot 1 (10 MHz Ch.39700 QPSK RB 1, Offset 0)

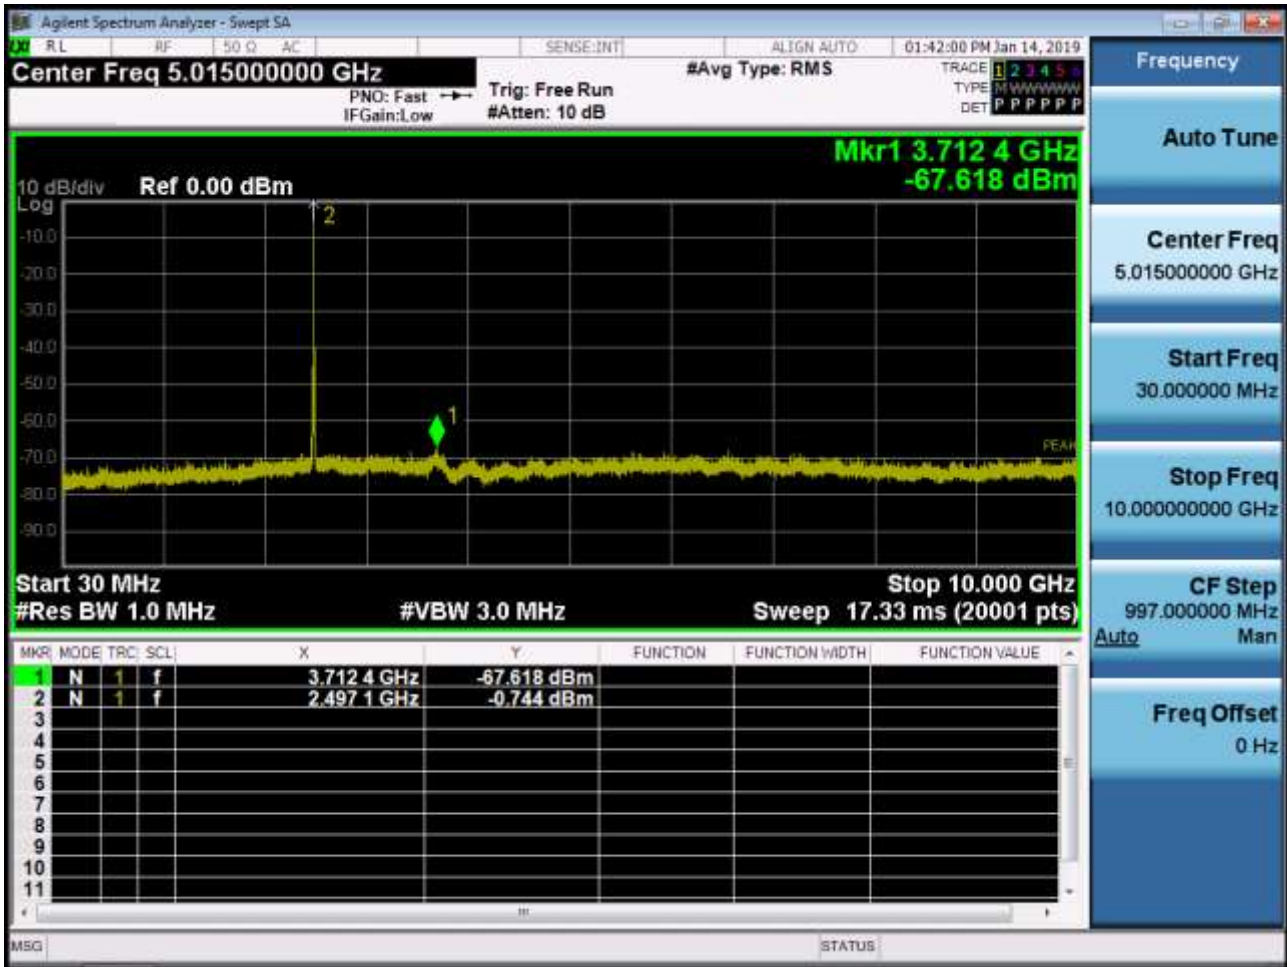

BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 39700 QPSK RB 1, Offset 0)




BAND 41. Conducted Spurious Plot 1 (10 MHz Ch.40620 QPSK RB 1, Offset 0)

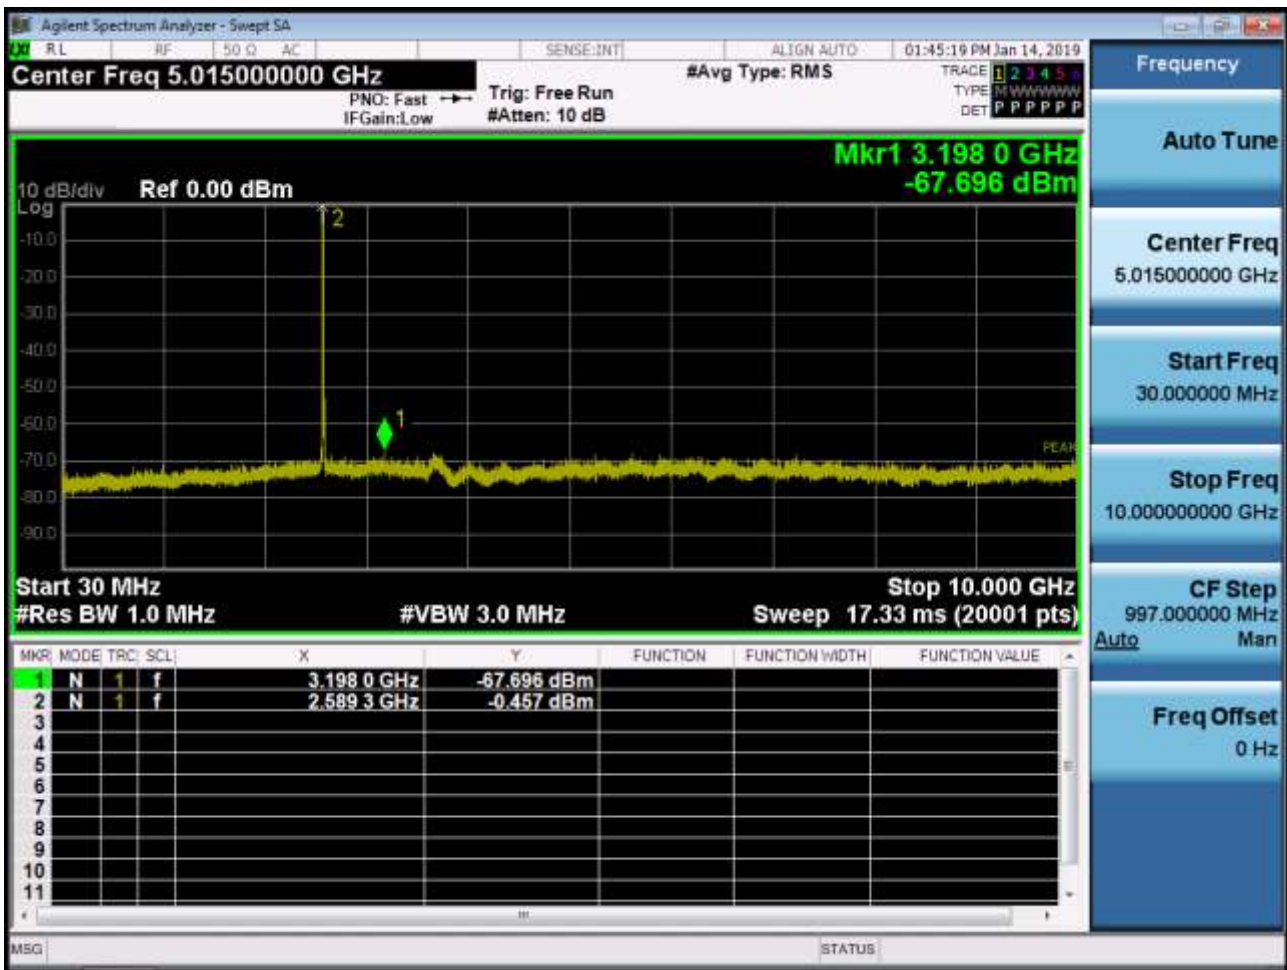

BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 40620 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 1 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)

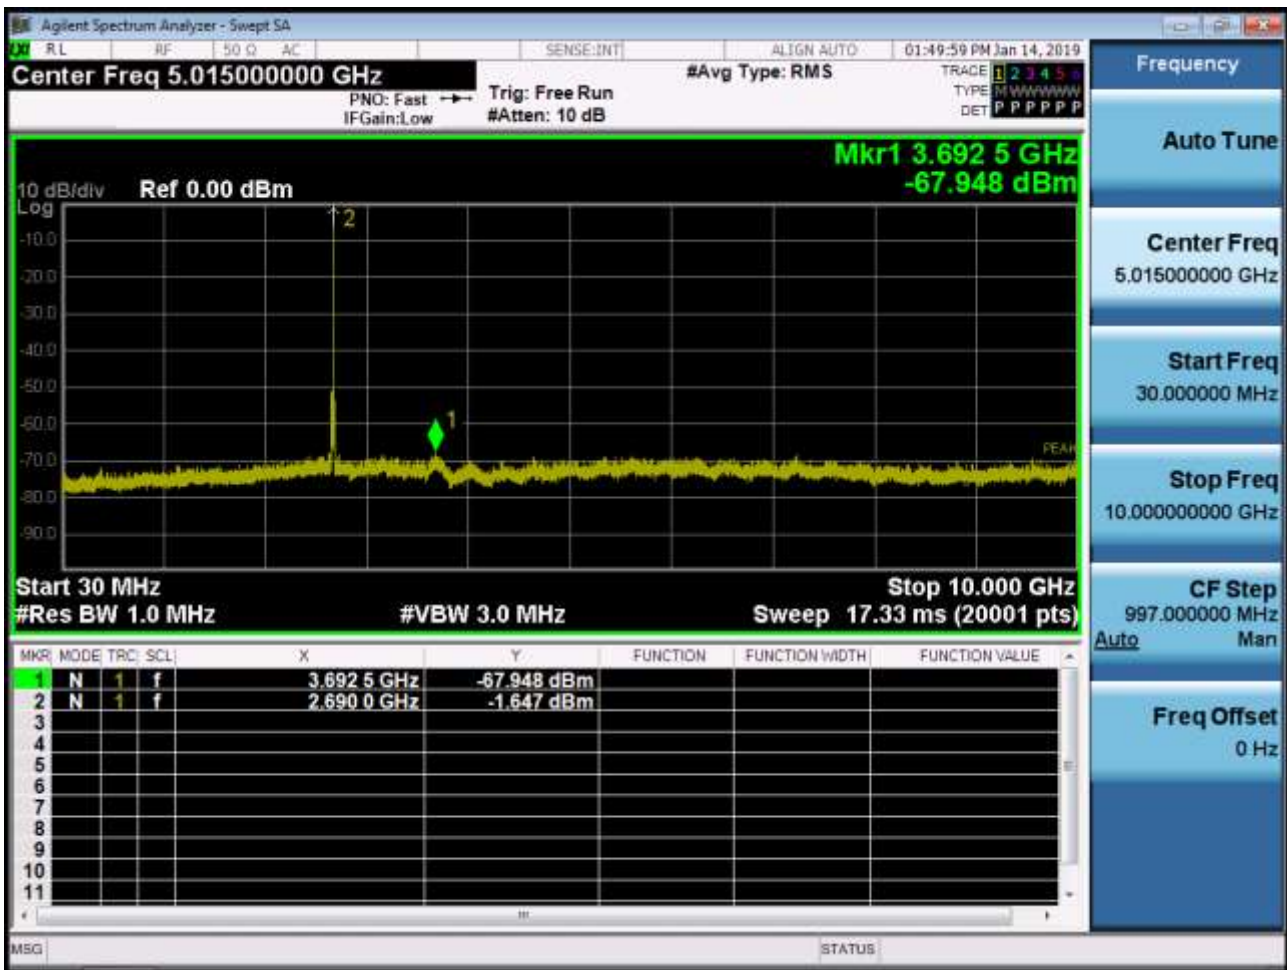




BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)




BAND 41. Conducted Spurious Plot 3 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)

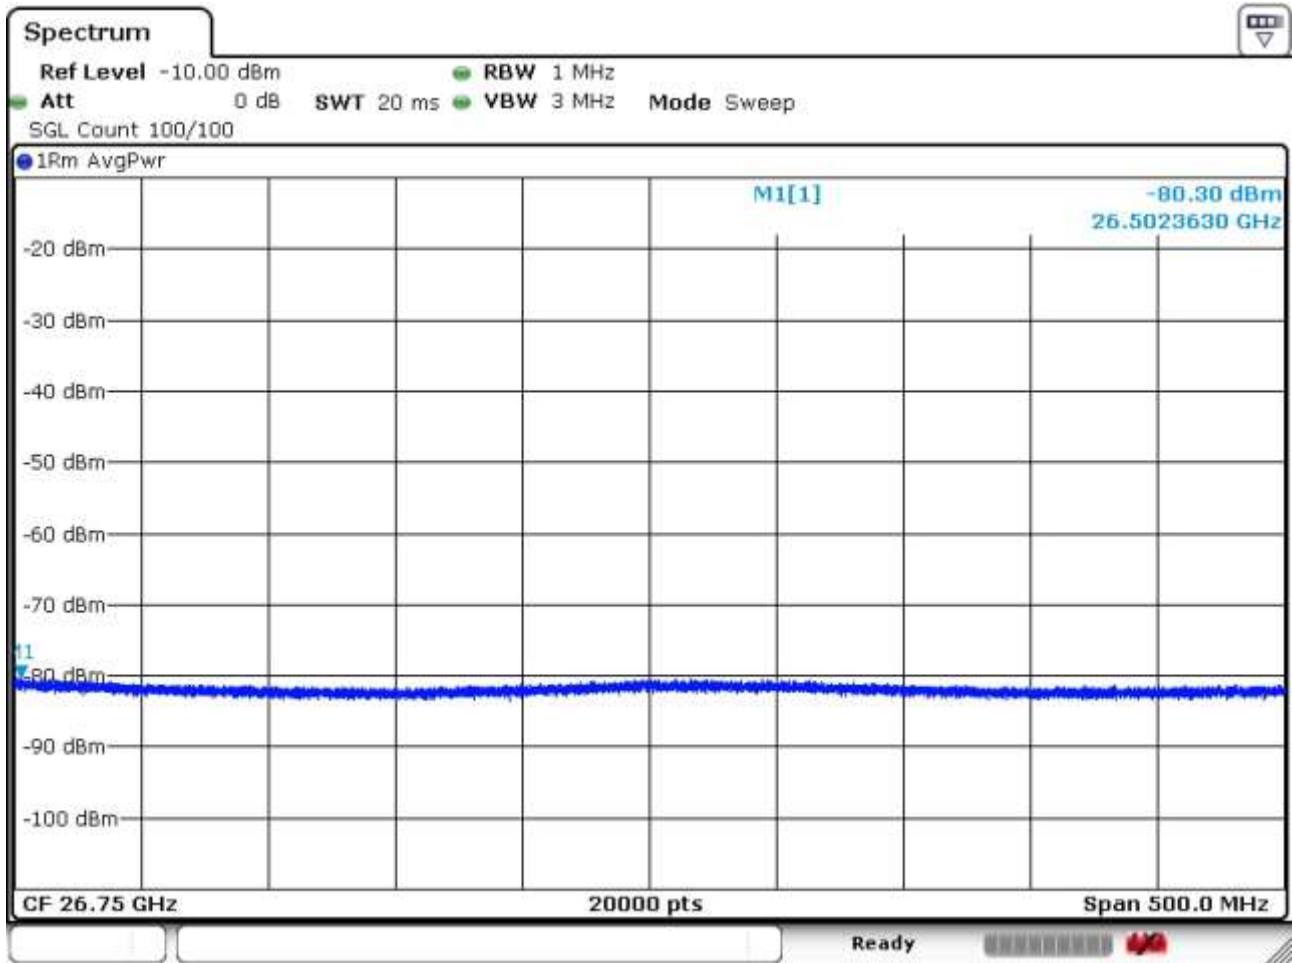




BAND 41. Conducted Spurious Plot 1 (15 MHz Ch.39725 QPSK RB 1, Offset 0)

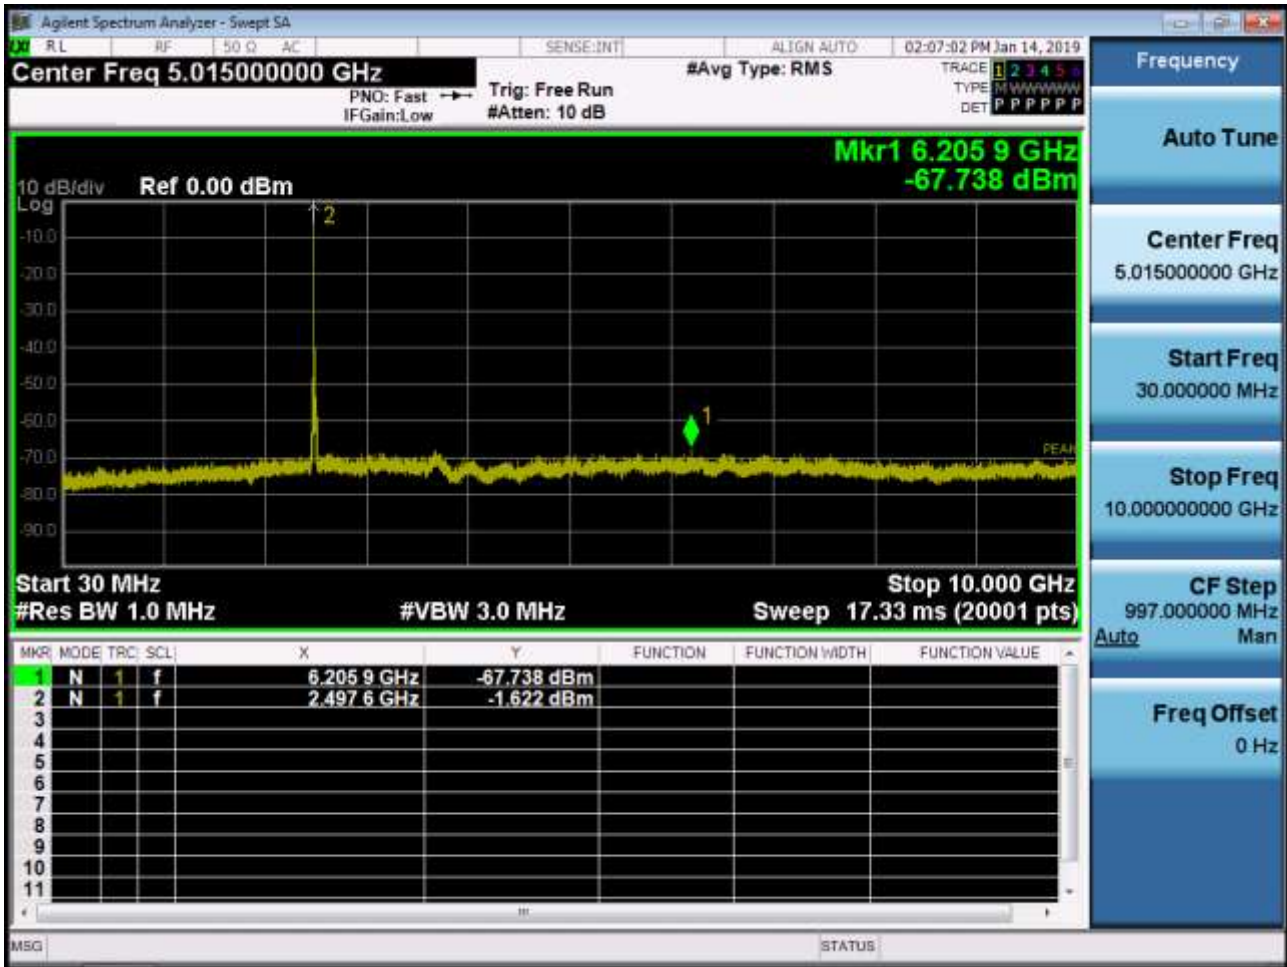

BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 39725 QPSK RB 1, Offset 0)




BAND 41. Conducted Spurious Plot 1 (15 MHz Ch.40620 QPSK RB 1, Offset 0)

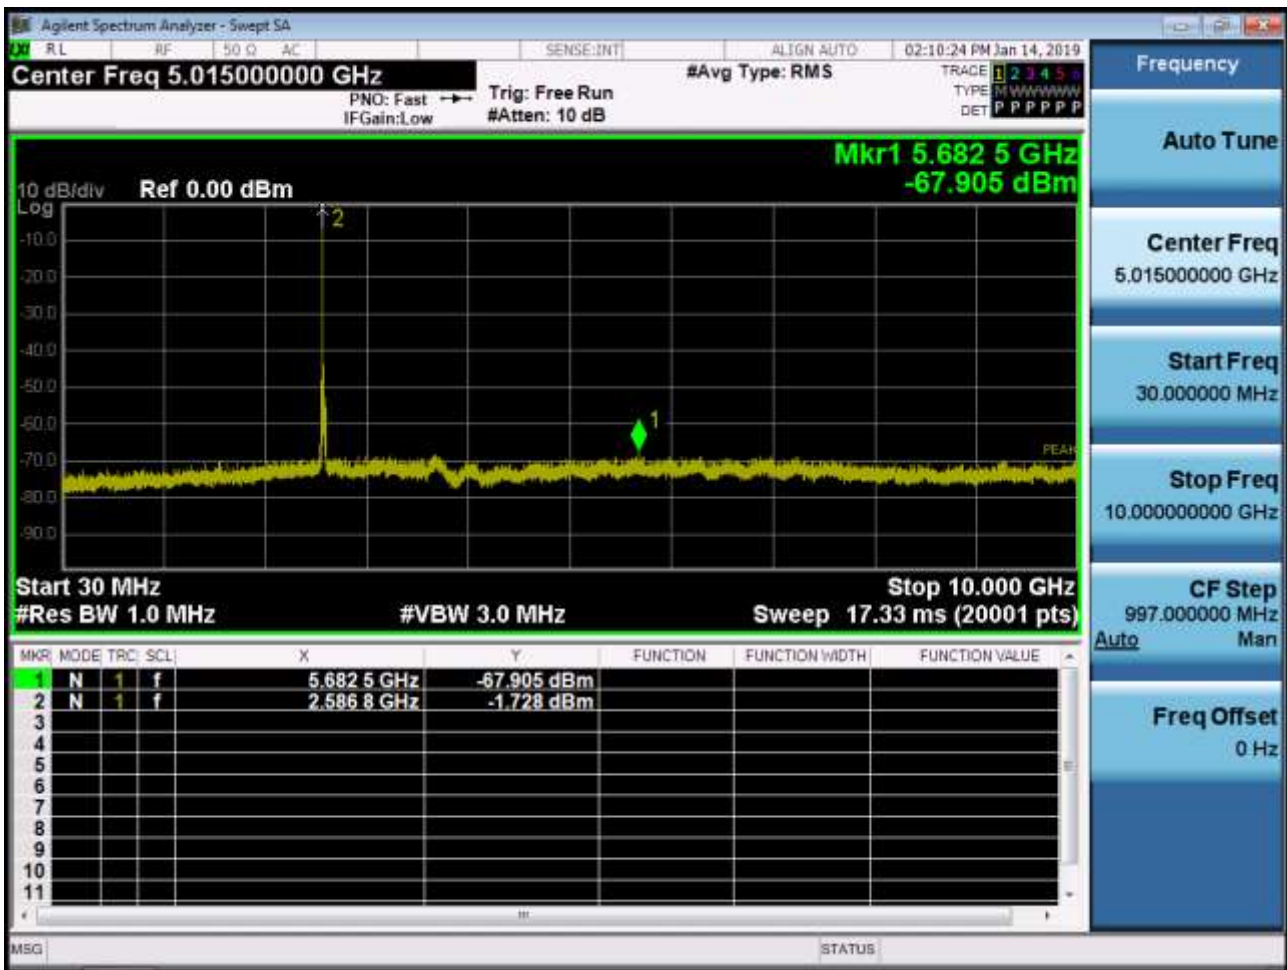

BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 40620 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 1 (15 MHz Ch.41515 QPSK RB 1, Offset 0)

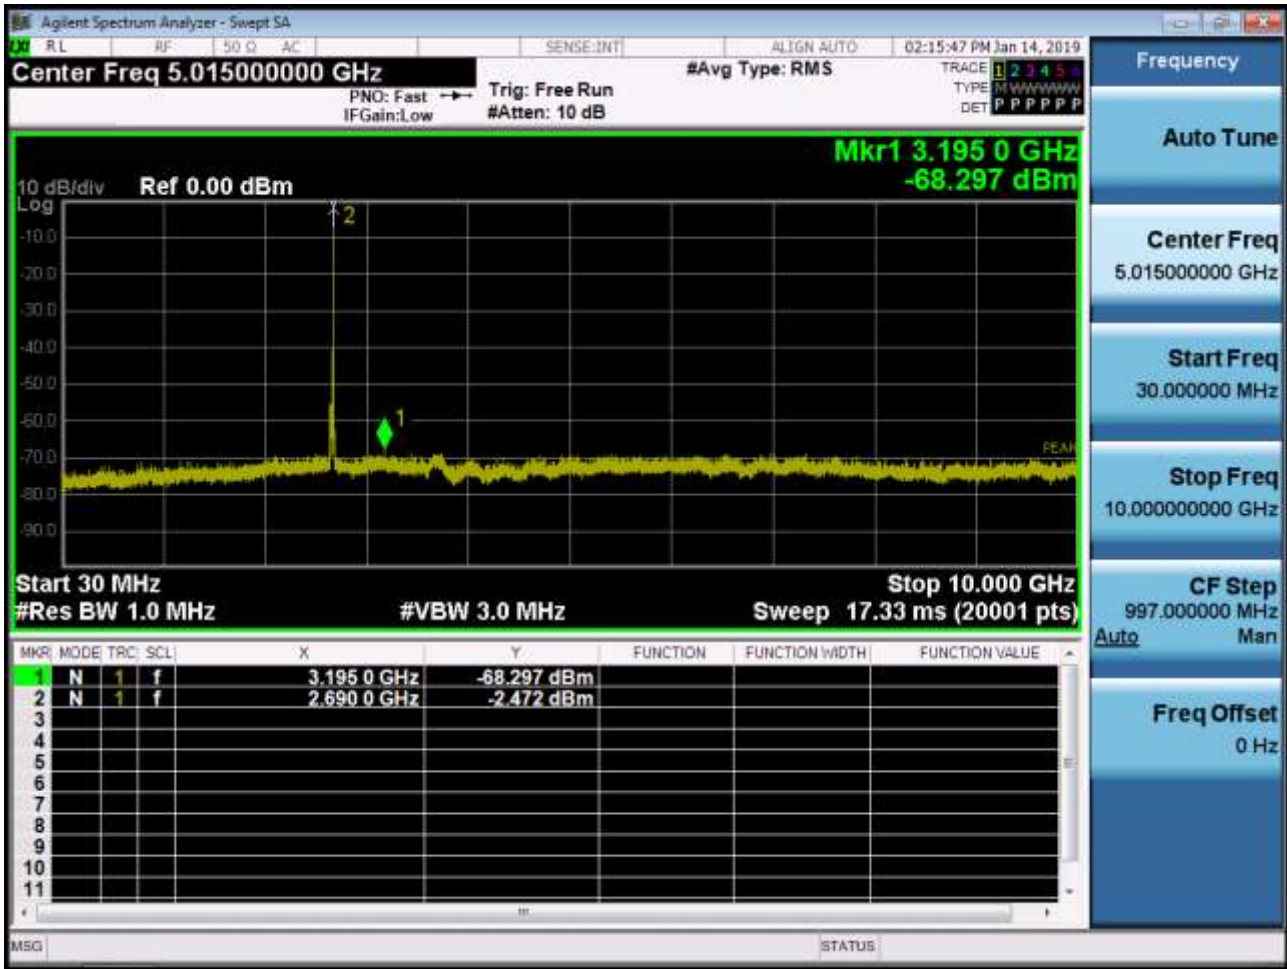


BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 41515 QPSK RB 1, Offset 0)






BAND 41. Conducted Spurious Plot 3 (15 MHz Ch. 41515 QPSK RB 1, Offset 0)

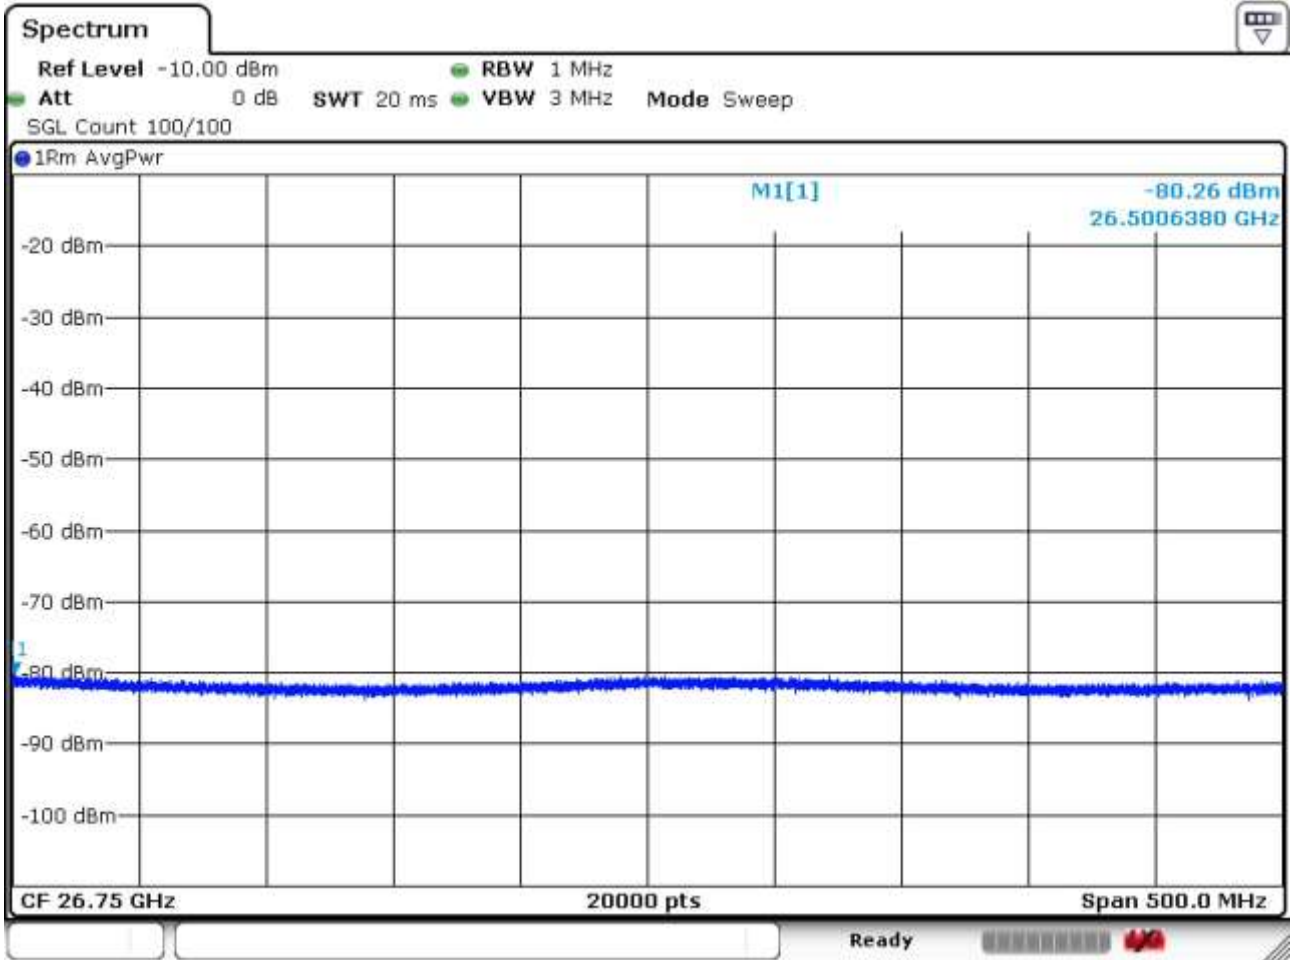

BAND 41. Conducted Spurious Plot 1 (20 MHz Ch.39750 QPSK RB 1, Offset 0)

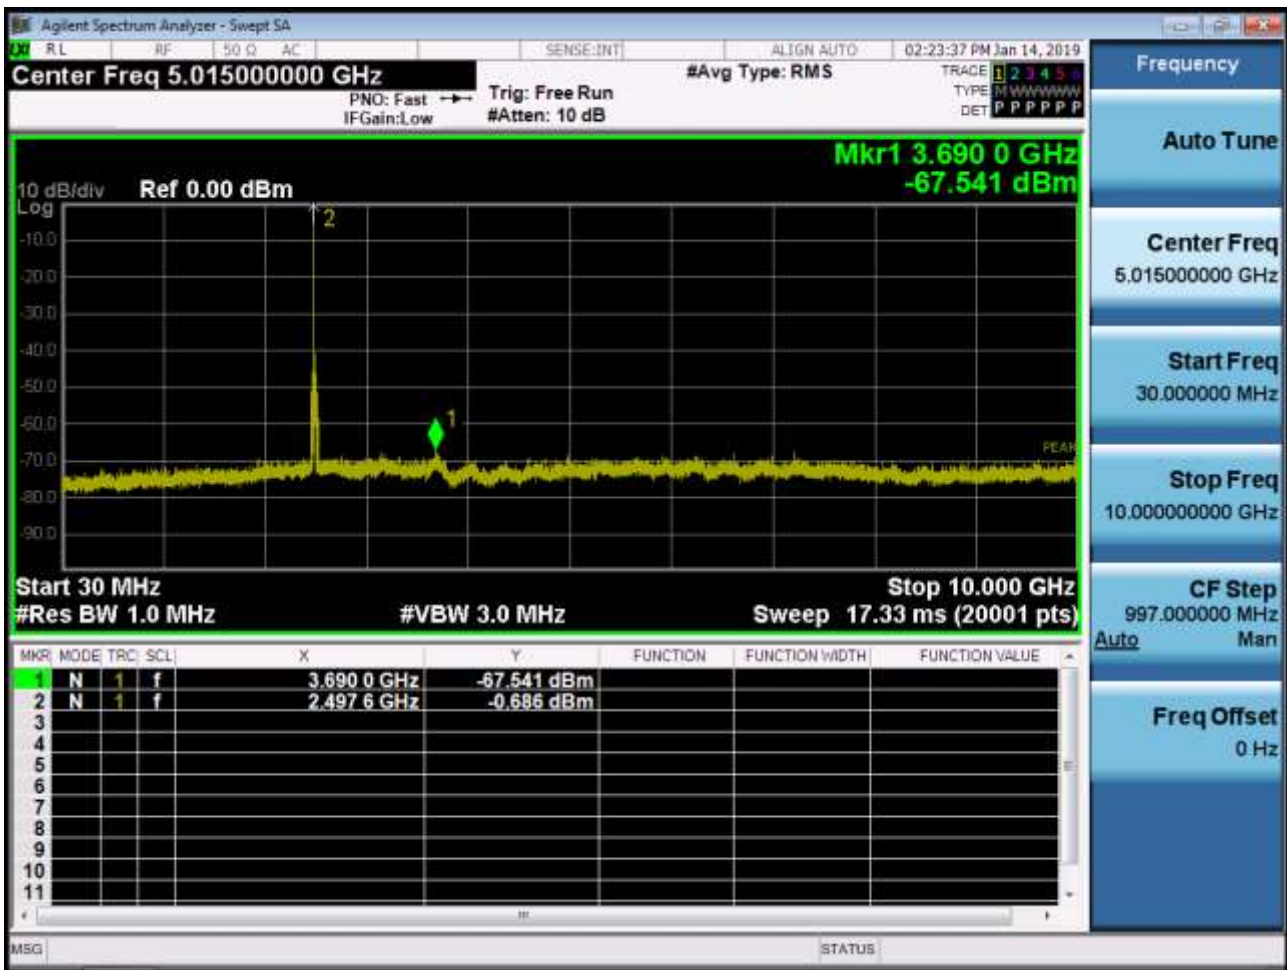




BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 39750 QPSK RB 1, Offset 0)




BAND 41. Conducted Spurious Plot 1 (20 MHz Ch.40620 QPSK RB 1, Offset 0)

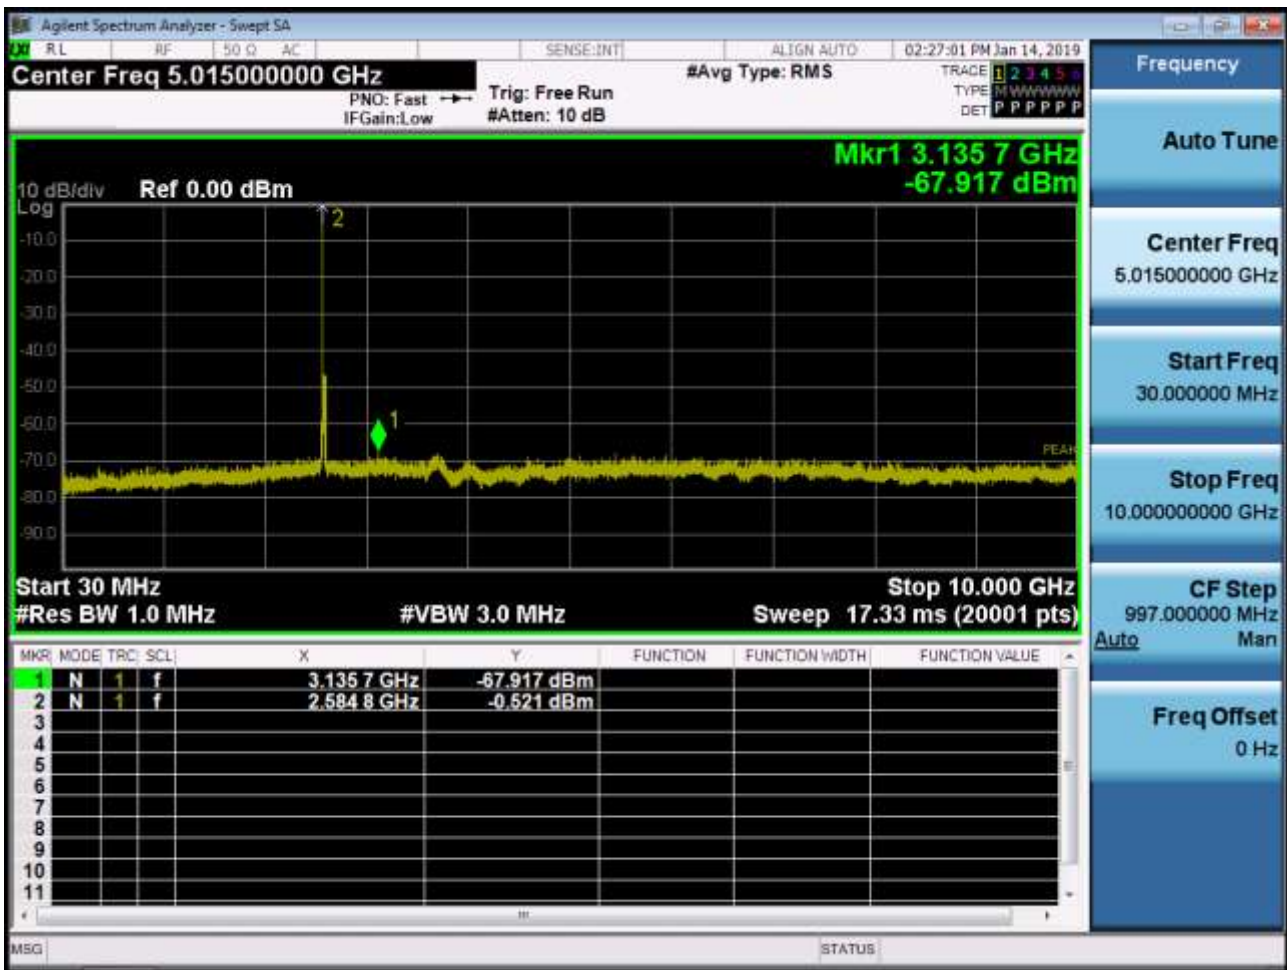

BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 40620 QPSK RB 1, Offset 0)




BAND 41. Conducted Spurious Plot 1 (20 MHz Ch.41490 QPSK RB 1, Offset 0)

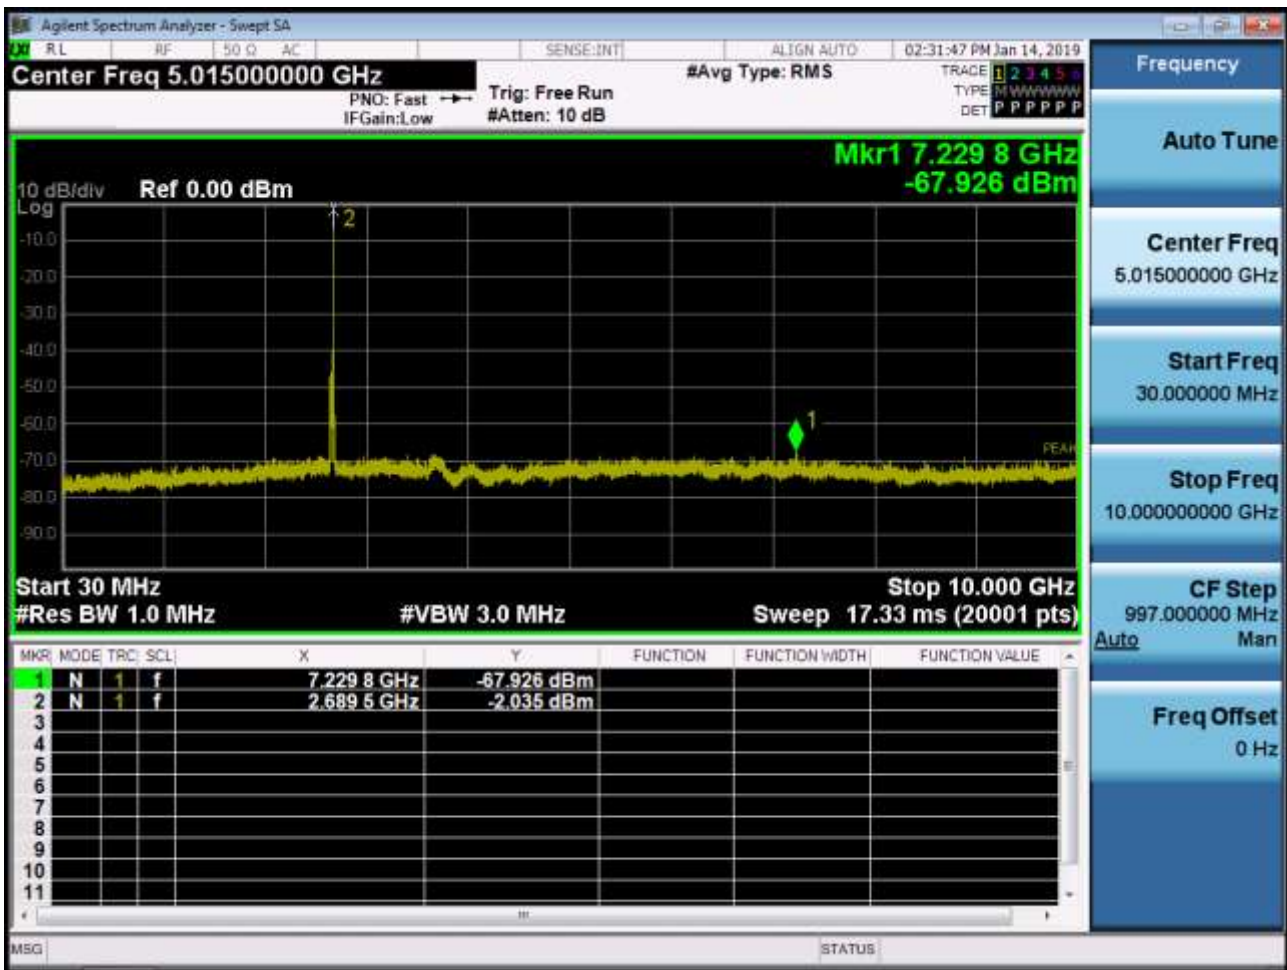

BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 41490 QPSK RB 1, Offset 0)



BAND 41. Conducted Spurious Plot 3 (20 MHz Ch. 41490 QPSK RB 1, Offset 0)

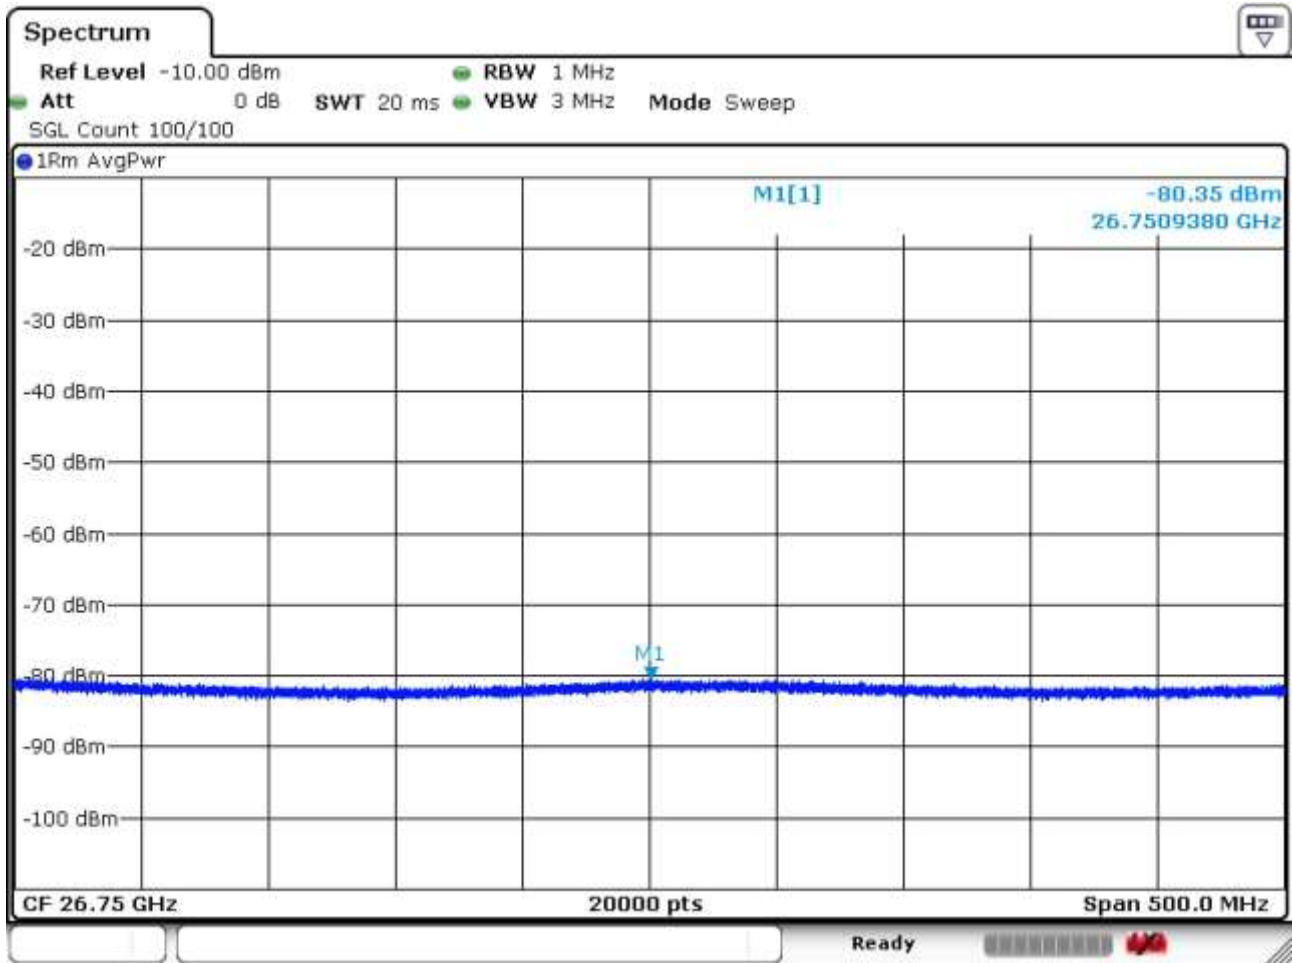

## 10. APPENDIX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1901-FC020-P
2	HCT-RF-1901-FC021-P
3	HCT-RF-1901-FC022-P
4	HCT-RF-1901-FC023-P
5	HCT-RF-1901-FC024-P
6	HCT-RF-1901-FC025-P
7	HCT-RF-1901-FC026-P