

Report No.: HCT-RF-2301-FC025

REVIEWED BY



Report prepared by : Chang Hee Hwang
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2301-FC025	January 11, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION.....	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS.....	11
8. SUMMARY TEST OF RESULTS	26
9. TEST RESULT	27
9.1 DUTY CYCLE.....	27
9.2 6 dB BANDWIDTH	31
9.3 OUTPUT POWER	36
9.4 POWER SPECTRAL DENSITY	48
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS.....	54
9.6 RADIATED SPURIOUS EMISSIONS	71
9.7 RADIATED RESTRICTED BAND EDGES	79
9.8 POWERLINE CONDUCTED EMISSIONS	86
10. LIST OF TEST EQUIPMENT	90
11. ANNEX A_ TEST SETUP PHOTO	92

1. EUT DESCRIPTION

Model	SM-M546B/DS		
Additional Model	-		
EUT Type	Mobile Phone		
Power Supply	DC 3.88 V		
Frequency Range	2412 MHz ~ 2472 MHz		
Max. RF Output Power	<u>Average Power</u>	Ant.1(SISO)	802.11b : 19.29 dBm 802.11g : 16.77 dBm 802.11n(HT20) : 16.78 dBm
		Ant.1&2(MIMO)	802.11n(HT20) : 16.84 dBm
	<u>Peak Power</u>	Ant.1(SISO)	802.11b : 24.95 dBm 802.11g : 26.25 dBm 802.11n(HT20) : 26.29 dBm
		Ant.1&2(MIMO)	802.11n(HT20) : 25.07 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Date(s) of Tests	November 30, 2022 ~ January 10, 2023		
Serial number	Radiated: R3CTB05MEGZ Conducted: R3CTB05MEDJ		

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	Ant1	Ant2	CDD	SDM
802.11b	O	X	X	X
802.11g	O	X	X	X
802.11n(HT20)	O	X	X	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii)

$$\text{Directional gain} = G_{\max} + 10 \cdot \text{LOG}(N_{\text{ANT}} / N_{\text{SS}})$$

Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)
ANT1	-4.60		
ANT2	-4.80		

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where G_N is the gain of the nth antenna and N_{ANT} is the total number of antennas used.

$$\text{Directional gain} = G_{\max} + 10 \cdot \text{LOG}(N_{\text{ANT}} / N_{\text{SS}})$$

Sample MIMO Calculation:

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

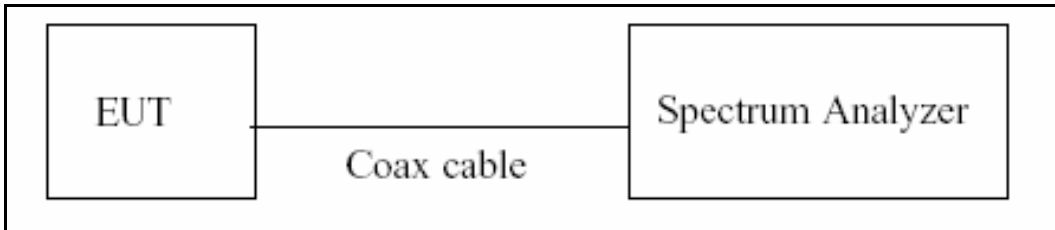

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

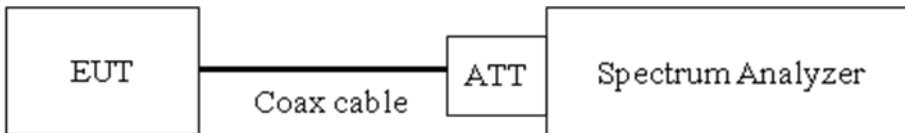

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration

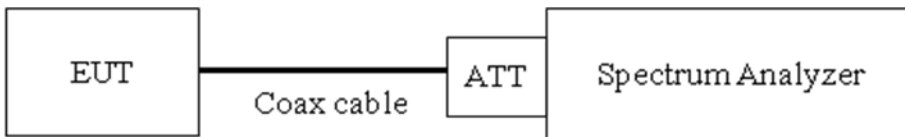

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

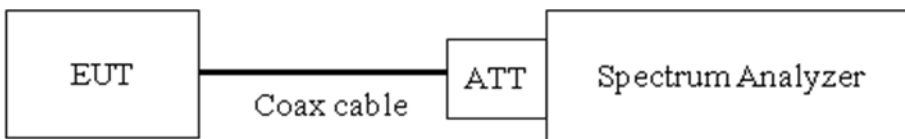

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.04
100	10.07
200	10.12
300	10.17
400	10.20
500	10.21
600	10.21
700	10.23
800	10.24
900	10.26
1000	10.27
2000	10.41
2400	10.43
2500	10.45
3000	10.52
4000	10.60
5000	10.71
6000	10.73
7000	10.80
8000	10.85
9000	10.91
10000	10.97
11000	11.02
12000	11.10
13000	11.19
14000	11.16
15000	11.21
16000	11.22
17000	11.25
18000	11.30
19000	11.32
20000	11.36
21000	11.48
22000	11.55
23000	11.55
24000	11.59
25000	11.68
26000	11.69

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss(1ea)


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

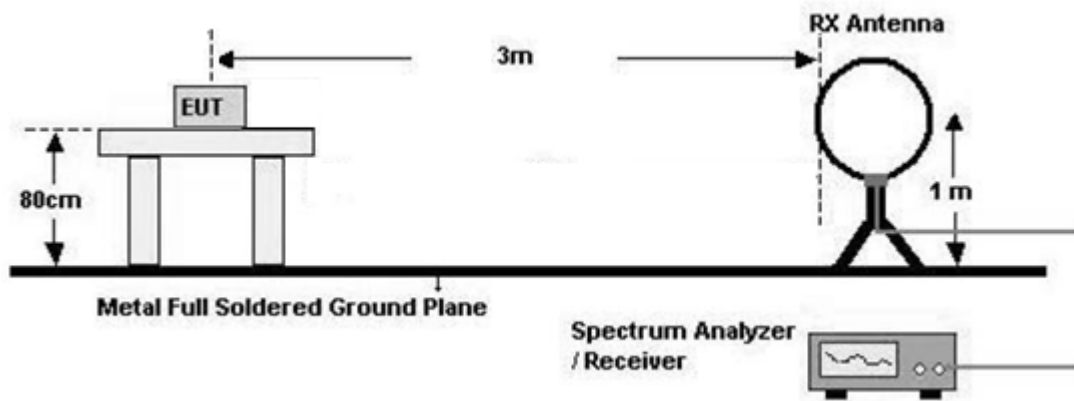

30 MHz - 1 GHz

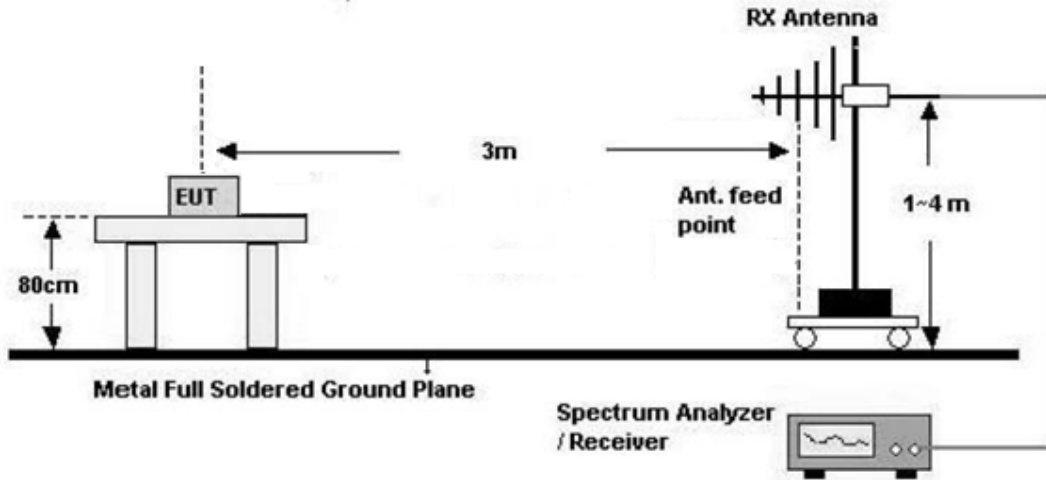

Above 1 GHz

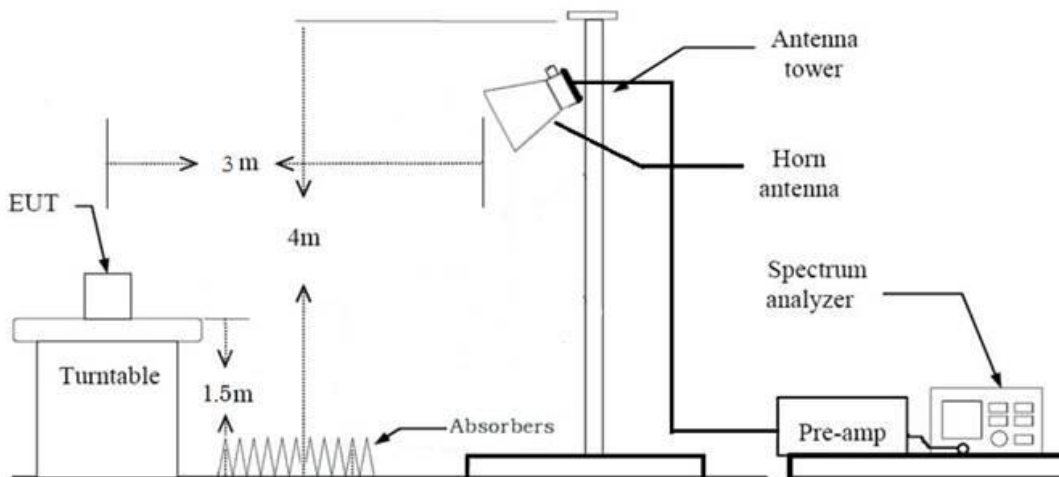

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)} \\ + \text{Duty Cycle Factor}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total(Measurement Type : Peak)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X, Y
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
4. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20): MCS0
5. Radiated Spurious Emission

All Antenna of operation were investigated and the worst case results are reported

 - Antenna Operation Type : Ant.1(SISO), Ant.1+Ant.2(MIMO_SDM)
 - Worst case : Ant.1(SISO)
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc) + Travel Adapter,
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of the highest power.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE

SISO

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.603	8.720	0.987	0.06
	2	4.302	4.435	0.970	0.13
	5.5	1.626	1.740	0.934	0.29
	11	0.861	0.993	0.867	0.62
802.11g	6	1.429	1.528	0.935	0.29
	9	0.958	1.074	0.892	0.50
	12	0.725	0.841	0.861	0.65
	18	0.491	0.611	0.805	0.94
	24	0.370	0.471	0.785	1.05
	36	0.256	0.372	0.687	1.63
	48	0.195	0.294	0.664	1.78
	54	0.180	0.296	0.607	2.17
802.11n (HT20)	6.5 (MCS0)	1.335	1.452	0.920	0.36
	13 (MCS1)	0.687	0.803	0.855	0.68
	19.5 (MCS2)	0.471	0.588	0.802	0.96
	26 (MCS3)	0.365	0.464	0.787	1.04
	39 (MCS4)	0.253	0.372	0.680	1.67
	52 (MCS5)	0.200	0.317	0.632	1.99
	58.5 (MCS6)	0.185	0.301	0.613	2.12
	65 (MCS7)	0.170	0.284	0.598	2.23


MIMO

Mode	Data Rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11n (HT20)	13 (MCS8)	0.694	0.808	0.859	0.66
	26 (MCS9)	0.367	0.486	0.755	1.22
	39 (MCS10)	0.258	0.375	0.689	1.62
	52 (MCS11)	0.203	0.319	0.635	1.97
	78 (MCS12)	0.152	0.269	0.566	2.47
	104 (MCS13)	0.124	0.241	0.516	2.88
	117 (MCS14)	0.114	0.233	0.489	3.11
130 (MCS15)	0.109	0.223	0.489	3.11	


▣ Test Plots

[SISO]


Duty cycle plot (802.11b(1 Mbps))

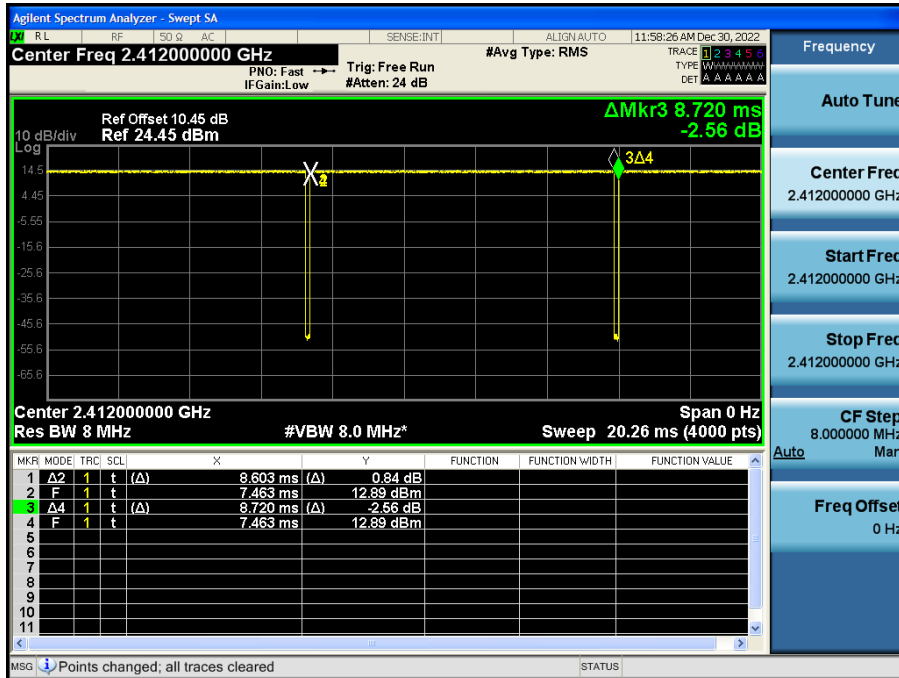

Duty cycle plot (802.11g(6 Mbps))

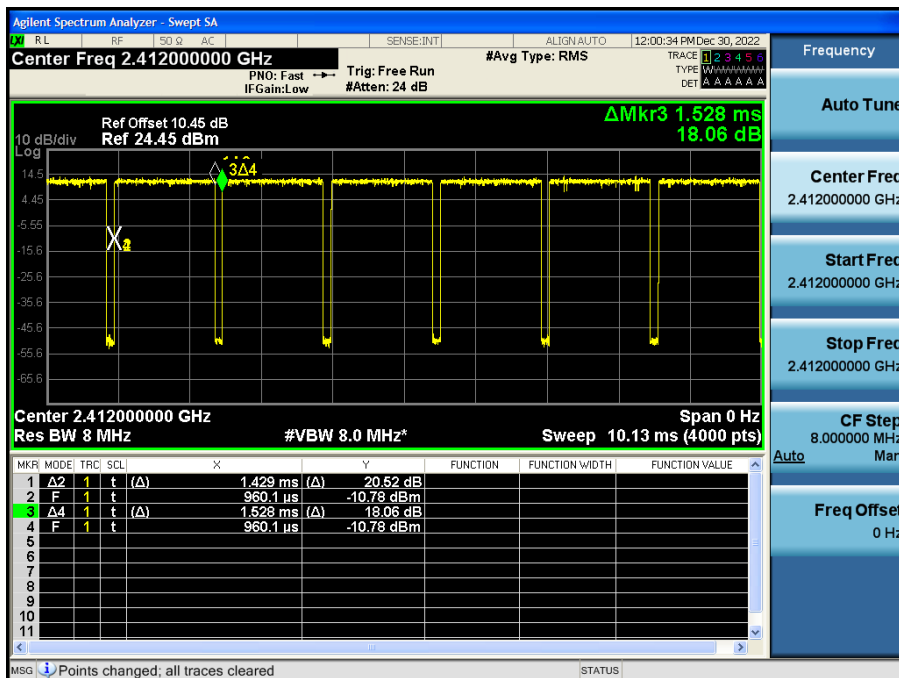


Duty cycle plot (802.11n(MCS0))

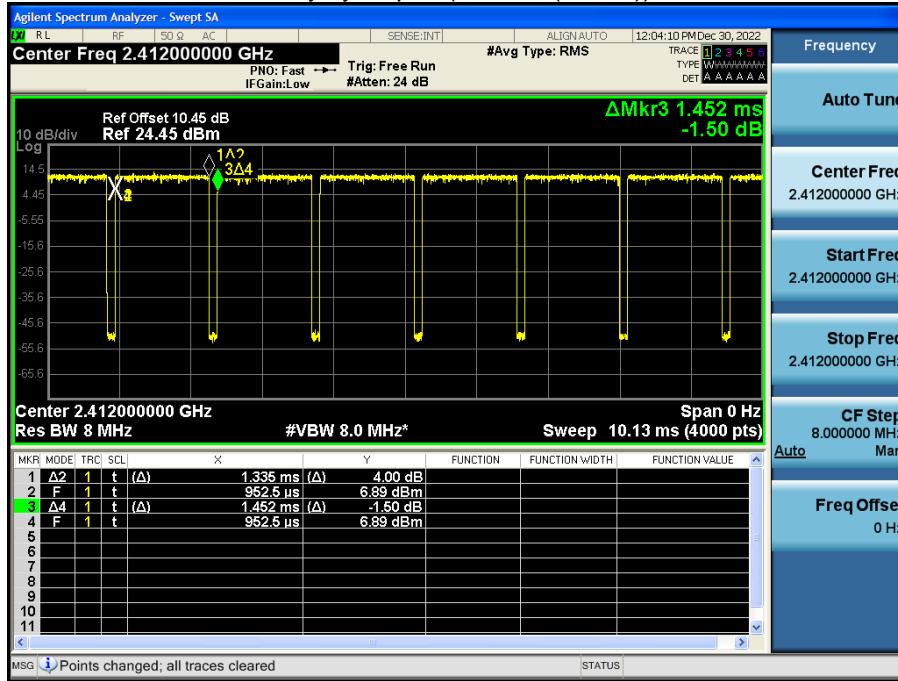

[MIMO]

Duty cycle plot (802.11n(MCS8))

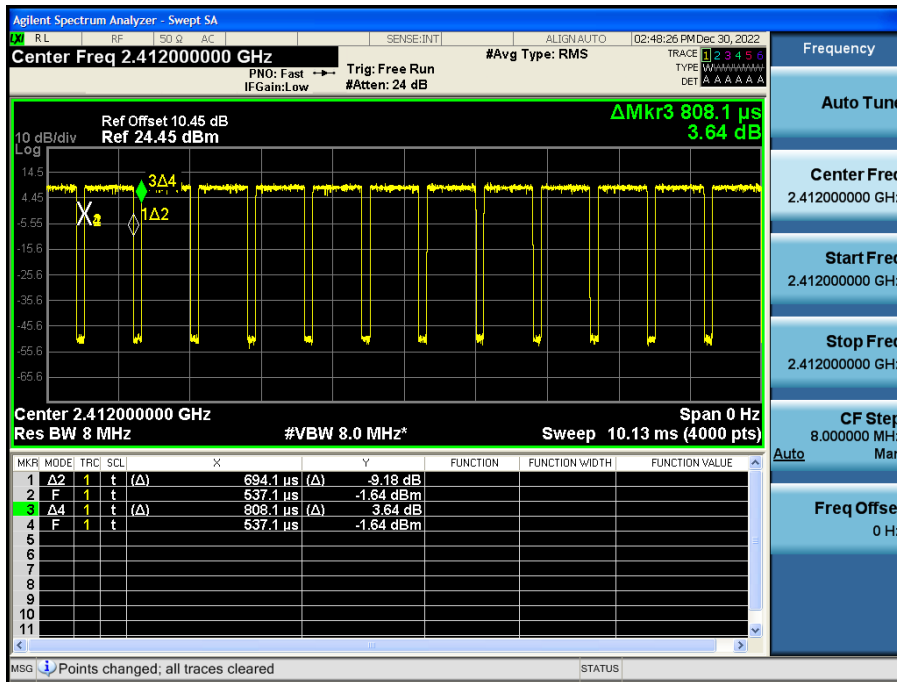

Note:

In order to simplify the report, attached plots were only the lowest data rate.

9.2 6 dB BANDWIDTH**[SISO Ant.1]**

Mode	Frequency [MHz]	Channel No.	6dB Bandwidth [MHz]	Limit [MHz]
802.11b	2412	1	8.111	0.50
	2437	6	8.104	0.50
	2462	11	8.111	0.50
	2467	12	8.109	0.50
	2472	13	8.113	0.50
802.11g	2412	1	15.12	0.50
	2437	6	16.43	0.50
	2462	11	15.09	0.50
	2467	12	15.14	0.50
	2472	13	15.12	0.50
802.11n(HT20)	2412	1	15.12	0.50
	2437	6	17.93	0.50
	2462	11	15.13	0.50
	2467	12	15.14	0.50
	2472	13	15.13	0.50

[MIMO Ant.1]

Mode	Frequency [MHz]	Channel No.	6dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT20)	2412	1	15.12	0.50
	2437	6	17.65	0.50
	2462	11	15.13	0.50
	2467	12	15.13	0.50
	2472	13	15.13	0.50


[MIMO Ant.2]

Mode	Frequency [MHz]	Channel No.	6dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT20)	2412	1	15.09	0.50
	2437	6	17.67	0.50
	2462	11	15.09	0.50
	2467	12	15.13	0.50
	2472	13	15.12	0.50


▣ Test Plots

[SISO Ant.1]


6 dB Bandwidth plot (802.11b-CH 6)

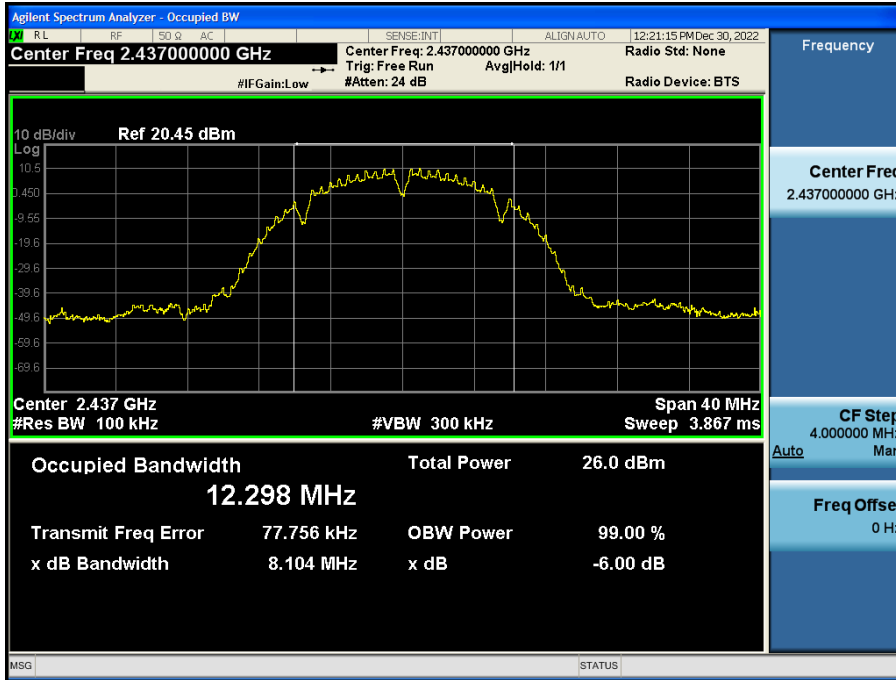

6 dB Bandwidth plot (802.11g-CH 11)

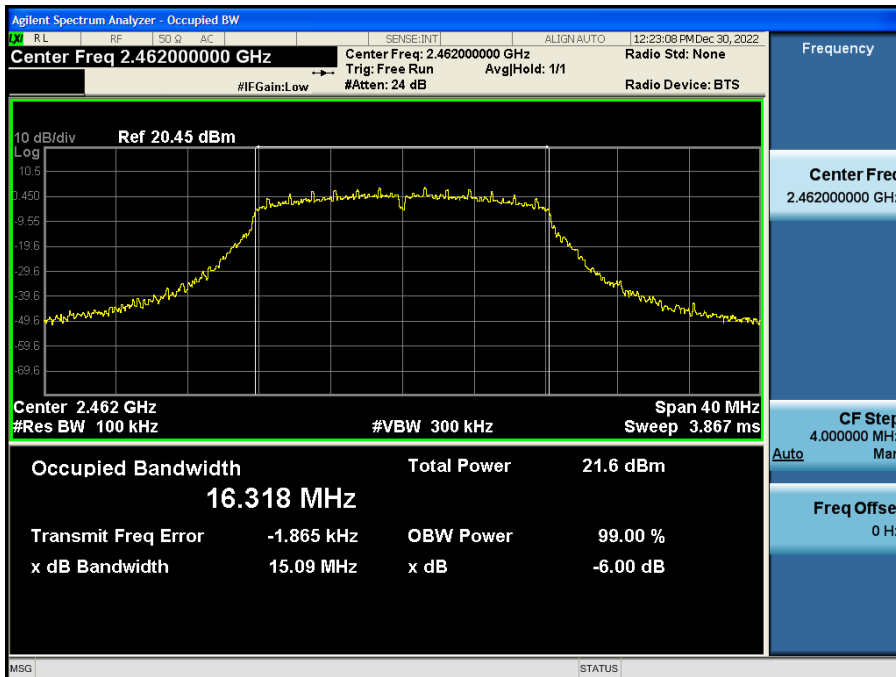


6 dB Bandwidth plot (802.11n_HT20-CH 1)

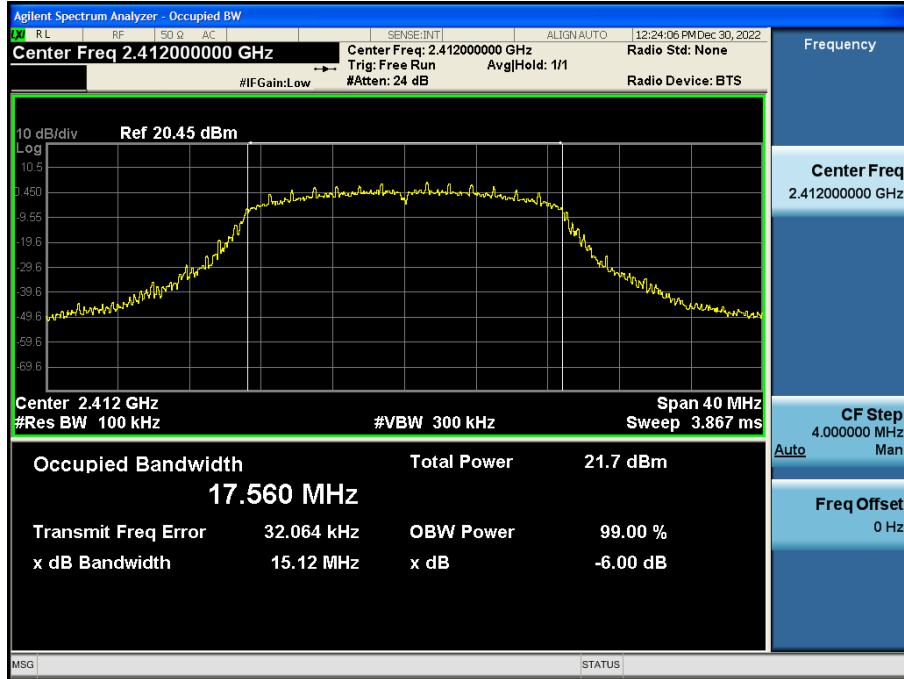


[MIMO Ant.1]

6 dB Bandwidth plot (802.11n_HT20-CH 1)

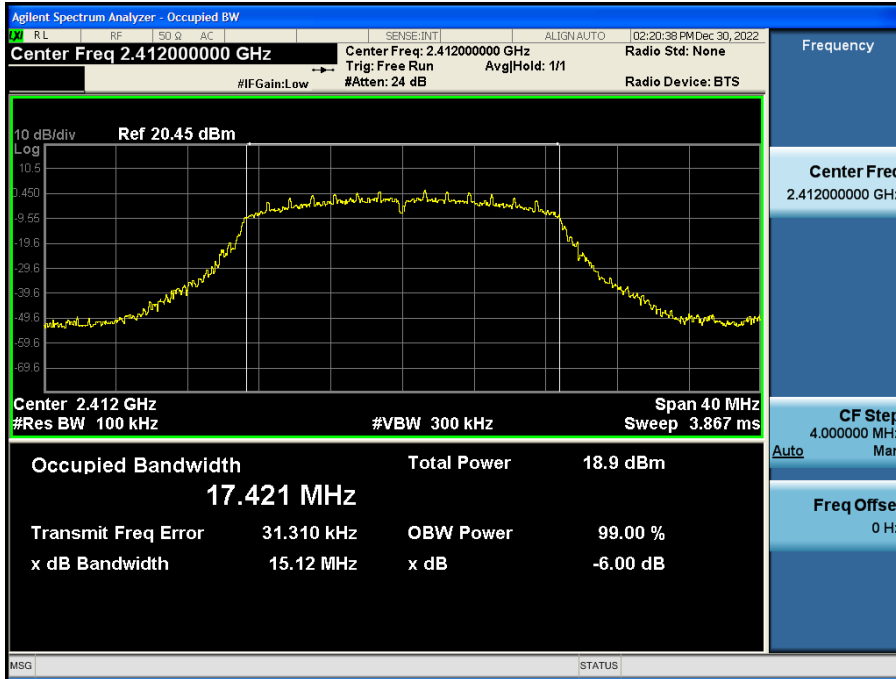

[MIMO Ant.2]

6 dB Bandwidth plot (802.11n_HT20-CH 1)

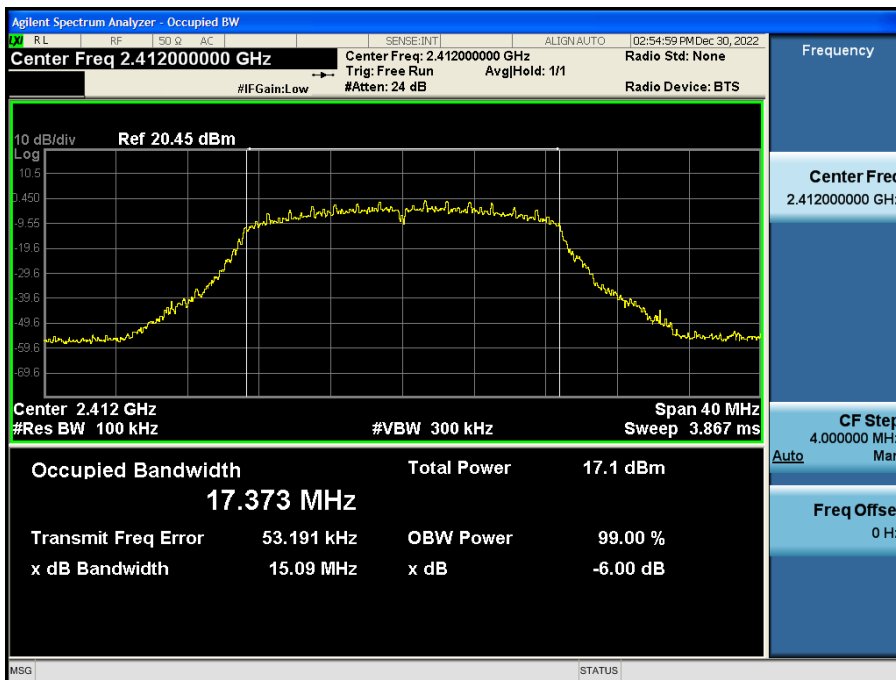

Note:

In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.

9.3 OUTPUT POWER

Power Level Setting

Peak Power

Power Meter offset

Attenuator loss(10 dB) + Cable loss

[SISO Ant.1]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	21.69	30
		2	21.94	30
		5.5	23.49	30
		11	24.95	30
2437	6	1	21.59	30
		2	21.84	30
		5.5	23.39	30
		11	24.86	30
2462	11	1	21.51	30
		2	21.77	30
		5.5	23.34	30
		11	24.82	30
2467	12	1	10.14	30
		2	10.32	30
		5.5	11.82	30
		11	13.30	30
2472	13	1	9.63	30
		2	9.92	30
		5.5	11.44	30
		11	12.93	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	25.09	30
		9	24.94	30
		12	24.61	30
		18	24.68	30
		24	25.41	30
		36	25.20	30
		48	24.18	30
		54	24.46	30
2437	6	6	25.81	30
		9	25.80	30
		12	25.49	30
		18	25.58	30
		24	26.25	30
		36	26.03	30
		48	23.80	30
		54	24.00	30
2462	11	6	24.74	30
		9	24.73	30
		12	24.39	30
		18	24.55	30
		24	25.24	30
		36	25.00	30
		48	23.99	30
		54	24.27	30
2467	12	6	15.54	30
		9	15.54	30
		12	15.14	30
		18	15.26	30
		24	15.98	30
		36	15.76	30
		48	15.69	30
		54	16.02	30
2472	13	6	10.90	30
		9	10.88	30
		12	10.50	30
		18	10.61	30
		24	11.34	30
		36	11.12	30
		48	11.08	30
		54	11.32	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	23.61	30
		1	23.30	30
		2	23.50	30
		3	23.90	30
		4	23.91	30
		5	23.79	30
		6	24.05	30
		7	23.91	30
2437	6	0	25.90	30
		1	25.66	30
		2	25.82	30
		3	26.29	30
		4	26.25	30
		5	23.89	30
		6	24.21	30
		7	24.06	30
2462	11	0	23.26	30
		1	23.04	30
		2	23.24	30
		3	23.60	30
		4	23.61	30
		5	23.54	30
		6	23.78	30
		7	23.68	30
2467	12	0	15.63	30
		1	15.38	30
		2	15.52	30
		3	15.99	30
		4	15.97	30
		5	15.89	30
		6	16.14	30
		7	16.00	30
2472	13	0	8.65	30
		1	8.49	30
		2	8.54	30
		3	9.07	30
		4	9.02	30
		5	8.91	30
		6	9.13	30
		7	9.05	30

[MIMO Ant.1]

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	8	19.44	30
		9	19.25	30
		10	19.10	30
		11	19.57	30
		12	19.62	30
		13	19.51	30
		14	19.78	30
		15	19.59	30
2437	6	8	21.67	30
		9	21.41	30
		10	21.33	30
		11	21.79	30
		12	21.83	30
		13	19.74	30
		14	19.92	30
		15	19.84	30
2462	11	8	19.06	30
		9	18.86	30
		10	18.86	30
		11	19.26	30
		12	19.26	30
		13	19.25	30
		14	19.43	30
		15	19.30	30
2467	12	8	9.40	30
		9	9.16	30
		10	9.04	30
		11	9.47	30
		12	9.57	30
		13	9.46	30
		14	9.64	30
		15	9.49	30
2472	13	8	9.31	30
		9	9.09	30
		10	8.98	30
		11	9.44	30
		12	9.46	30
		13	9.44	30
		14	9.67	30
		15	9.50	30

[MIMO Ant.2]

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	8	18.47	30
		9	17.66	30
		10	17.75	30
		11	17.99	30
		12	18.08	30
		13	17.90	30
		14	18.01	30
		15	17.92	30
2437	6	8	22.42	30
		9	21.63	30
		10	21.71	30
		11	22.03	30
		12	22.12	30
		13	20.16	30
		14	20.33	30
		15	20.19	30
2462	11	8	18.20	30
		9	17.45	30
		10	17.54	30
		11	17.76	30
		12	17.85	30
		13	17.64	30
		14	17.78	30
		15	17.72	30
2467	12	8	8.65	30
		9	7.88	30
		10	7.96	30
		11	8.20	30
		12	8.30	30
		13	8.09	30
		14	8.21	30
		15	8.16	30
2472	13	8	9.61	30
		9	8.86	30
		10	8.96	30
		11	9.18	30
		12	9.24	30
		13	9.10	30
		14	9.28	30
		15	9.14	30

[MIMO Ant.1 + Ant.2]

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	8	19.44	18.47	21.99	30
		9	19.25	17.66	21.54	30
		10	19.10	17.75	21.49	30
		11	19.57	17.99	21.86	30
		12	19.62	18.08	21.93	30
		13	19.51	17.90	21.79	30
		14	19.78	18.01	22.00	30
		15	19.59	17.92	21.84	30
2437	6	8	21.67	22.42	25.07	30
		9	21.41	21.63	24.53	30
		10	21.33	21.71	24.54	30
		11	21.79	22.03	24.92	30
		12	21.83	22.12	24.99	30
		13	19.74	20.16	22.96	30
		14	19.92	20.33	23.14	30
		15	19.84	20.19	23.03	30
2462	11	8	19.06	18.20	21.66	30
		9	18.86	17.45	21.23	30
		10	18.86	17.54	21.26	30
		11	19.26	17.76	21.59	30
		12	19.26	17.85	21.62	30
		13	19.25	17.64	21.53	30
		14	19.43	17.78	21.69	30
		15	19.30	17.72	21.59	30
2467	12	8	9.40	8.65	12.05	30
		9	9.16	7.88	11.58	30
		10	9.04	7.96	11.54	30
		11	9.47	8.20	11.89	30
		12	9.57	8.30	11.99	30
		13	9.46	8.09	11.84	30
		14	9.64	8.21	12.00	30
		15	9.49	8.16	11.88	30
2472	13	8	9.31	9.61	12.47	30
		9	9.09	8.86	11.99	30
		10	8.98	8.96	11.98	30
		11	9.44	9.18	12.32	30
		12	9.46	9.24	12.36	30
		13	9.44	9.10	12.28	30
		14	9.67	9.28	12.49	30
		15	9.50	9.14	12.34	30

Average Power

Power Meter offset Loss = Attenuator loss(20 dB) + Cable loss

[SISO Ant.1]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	19.14	0.06	19.20	30
		2	19.08	0.13	19.21	30
		5.5	18.92	0.29	19.21	30
		11	18.67	0.62	19.29	30
2437	6	1	18.51	0.06	18.57	30
		2	18.48	0.13	18.61	30
		5.5	18.30	0.29	18.60	30
		11	18.11	0.62	18.73	30
2462	11	1	18.79	0.06	18.85	30
		2	18.76	0.13	18.89	30
		5.5	18.58	0.29	18.88	30
		11	18.38	0.62	19.00	30
2467	12	1	3.80	0.06	3.86	30
		2	3.73	0.13	3.86	30
		5.5	3.58	0.29	3.87	30
		11	3.37	0.62	3.99	30
2472	13	1	3.81	0.06	3.86	30
		2	3.74	0.13	3.88	30
		5.5	3.54	0.29	3.83	30
		11	3.35	0.62	3.97	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	14.29	0.29	14.59	30
		9	14.17	0.50	14.66	30
		12	14.03	0.65	14.67	30
		18	13.76	0.94	14.70	30
		24	13.49	1.05	14.54	30
		36	13.01	1.63	14.64	30
		48	12.66	1.78	14.44	30
		54	12.51	2.17	14.68	30
2437	6	6	16.40	0.29	16.69	30
		9	16.25	0.50	16.75	30
		12	16.11	0.65	16.76	30
		18	15.83	0.94	16.77	30
		24	15.50	1.05	16.55	30
		36	15.02	1.63	16.65	30
		48	12.81	1.78	14.59	30
		54	12.65	2.17	14.82	30
2462	11	6	14.23	0.29	14.52	30
		9	14.06	0.50	14.56	30
		12	13.89	0.65	14.54	30
		18	13.68	0.94	14.63	30
		24	13.37	1.05	14.42	30
		36	12.94	1.63	14.57	30
		48	12.56	1.78	14.34	30
		54	12.40	2.17	14.57	30
2467	12	6	3.22	0.29	3.51	30
		9	3.08	0.50	3.58	30
		12	2.91	0.65	3.56	30
		18	2.64	0.94	3.58	30
		24	2.36	1.05	3.42	30
		36	1.93	1.63	3.55	30
		48	1.56	1.78	3.34	30
		54	1.41	2.17	3.57	30
2472	13	6	3.17	0.29	3.46	30
		9	2.99	0.50	3.49	30
		12	2.87	0.65	3.52	30
		18	2.62	0.94	3.56	30
		24	2.34	1.05	3.39	30
		36	1.92	1.63	3.55	30
		48	1.49	1.78	3.27	30
		54	1.37	2.17	3.54	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	14.07	0.36	14.43	30
		1	13.73	0.68	14.41	30
		2	13.51	0.96	14.47	30
		3	13.25	1.04	14.29	30
		4	12.85	1.67	14.52	30
		5	12.46	1.99	14.45	30
		6	12.38	2.12	14.50	30
		7	12.16	2.23	14.39	30
2437	6	0	16.38	0.36	16.74	30
		1	16.01	0.68	16.69	30
		2	15.78	0.96	16.74	30
		3	15.53	1.04	16.57	30
		4	15.10	1.67	16.78	30
		5	12.85	1.99	14.84	30
		6	12.75	2.12	14.87	30
		7	12.54	2.23	14.77	30
2462	11	0	14.06	0.36	14.42	30
		1	13.68	0.68	14.36	30
		2	13.50	0.96	14.46	30
		3	13.23	1.04	14.27	30
		4	12.82	1.67	14.49	30
		5	12.43	1.99	14.42	30
		6	12.37	2.12	14.49	30
		7	12.17	2.23	14.40	30
2467	12	0	3.04	0.36	3.41	30
		1	2.67	0.68	3.35	30
		2	2.45	0.96	3.41	30
		3	2.20	1.04	3.24	30
		4	1.79	1.67	3.47	30
		5	1.43	1.99	3.43	30
		6	1.31	2.12	3.43	30
		7	1.14	2.23	3.37	30
2472	13	0	3.01	0.36	3.38	30
		1	2.62	0.68	3.30	30
		2	2.40	0.96	3.36	30
		3	2.16	1.04	3.20	30
		4	1.75	1.67	3.42	30
		5	1.40	1.99	3.40	30
		6	1.30	2.12	3.42	30
		7	1.11	2.23	3.34	30

[MIMO Ant.1]

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	8	11.03	0.66	11.69	30
		9	10.51	1.22	11.72	30
		10	10.05	1.62	11.67	30
		11	9.79	1.97	11.76	30
		12	9.21	2.47	11.68	30
		13	8.77	2.88	11.64	30
		14	8.62	3.11	11.73	30
		15	8.52	3.11	11.63	30
2437	6	8	13.10	0.66	13.76	30
		9	12.56	1.22	13.78	30
		10	12.18	1.62	13.80	30
		11	11.84	1.97	13.81	30
		12	11.25	2.47	13.73	30
		13	8.75	2.88	11.62	30
		14	8.66	3.11	11.76	30
		15	8.57	3.11	11.68	30
2462	11	8	10.70	0.66	11.36	30
		9	10.18	1.22	11.40	30
		10	9.86	1.62	11.48	30
		11	9.61	1.97	11.58	30
		12	8.99	2.47	11.46	30
		13	8.54	2.88	11.42	30
		14	8.45	3.11	11.56	30
		15	8.33	3.11	11.44	30
2467	12	8	0.74	0.66	1.40	30
		9	0.24	1.22	1.46	30
		10	-0.21	1.62	1.41	30
		11	-0.49	1.97	1.48	30
		12	-1.06	2.47	1.41	30
		13	-1.52	2.88	1.35	30
		14	-1.63	3.11	1.47	30
		15	-1.77	3.11	1.34	30
2472	13	8	0.62	0.66	1.28	30
		9	0.10	1.22	1.32	30
		10	-0.33	1.62	1.29	30
		11	-0.59	1.97	1.38	30
		12	-1.19	2.47	1.28	30
		13	-1.63	2.88	1.25	30
		14	-1.73	3.11	1.37	30
		15	-1.90	3.11	1.21	30

[MIMO Ant.2]

802.11nHT20 Mode		MCS Index	Measured Power dBm	Duty Cycle Factor	Measured PowerdBm + Duty Cycle Factor	Limit dBm
Frequency [MHz]	Channel No.					
2412	1	8	9.20	0.66	9.86	30
		9	8.67	1.22	9.89	30
		10	8.25	1.62	9.87	30
		11	7.99	1.97	9.96	30
		12	7.37	2.47	9.84	30
		13	6.99	2.88	9.87	30
		14	6.84	3.11	9.94	30
		15	6.67	3.11	9.78	30
2437	6	8	13.08	0.66	13.74	30
		9	12.56	1.22	13.78	30
		10	12.15	1.62	13.76	30
		11	11.87	1.97	13.84	30
		12	11.24	2.47	13.72	30
		13	8.86	2.88	11.73	30
		14	8.66	3.11	11.77	30
		15	8.52	3.11	11.63	30
2462	11	8	9.03	0.66	9.69	30
		9	8.53	1.22	9.75	30
		10	8.17	1.62	9.78	30
		11	7.86	1.97	9.83	30
		12	7.29	2.47	9.76	30
		13	6.89	2.88	9.77	30
		14	6.72	3.11	9.83	30
		15	6.60	3.11	9.71	30
2467	12	8	-0.51	0.66	0.15	30
		9	-1.04	1.22	0.18	30
		10	-1.42	1.62	0.20	30
		11	-1.70	1.97	0.27	30
		12	-2.30	2.47	0.17	30
		13	-2.74	2.88	0.13	30
		14	-2.88	3.11	0.22	30
		15	-3.03	3.11	0.08	30
2472	13	8	0.44	0.66	1.10	30
		9	-0.10	1.22	1.12	30
		10	-0.50	1.62	1.12	30
		11	-0.79	1.97	1.18	30
		12	-1.40	2.47	1.07	30
		13	-1.78	2.88	1.09	30
		14	-1.95	3.11	1.16	30
		15	-2.12	3.11	0.99	30

[MIMO Ant.1 + Ant2]

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	8	11.69	9.86	13.88	30
		9	11.72	9.89	13.91	30
		10	11.67	9.87	13.87	30
		11	11.76	9.96	13.96	30
		12	11.68	9.84	13.87	30
		13	11.64	9.87	13.85	30
		14	11.73	9.94	13.94	30
2437	6	8	13.76	13.74	16.76	30
		9	13.78	13.78	16.79	30
		10	13.80	13.76	16.79	30
		11	13.81	13.84	16.84	30
		12	13.73	13.72	16.73	30
		13	11.62	11.73	14.69	30
		14	11.76	11.77	14.78	30
2462	11	8	11.36	9.69	13.61	30
		9	11.40	9.75	13.66	30
		10	11.48	9.78	13.72	30
		11	11.58	9.83	13.81	30
		12	11.46	9.76	13.70	30
		13	11.42	9.77	13.68	30
		14	11.56	9.83	13.79	30
2467	12	8	1.40	0.15	3.83	30
		9	1.46	0.18	3.88	30
		10	1.41	0.20	3.85	30
		11	1.48	0.27	3.93	30
		12	1.41	0.17	3.84	30
		13	1.35	0.13	3.80	30
		14	1.47	0.22	3.90	30
2472	13	8	1.28	1.10	4.20	30
		9	1.32	1.12	4.23	30
		10	1.29	1.12	4.21	30
		11	1.38	1.18	4.29	30
		12	1.28	1.07	4.19	30
		13	1.25	1.09	4.18	30
		14	1.37	1.16	4.28	30
		15	1.21	0.99	4.11	30

9.4 POWER SPECTRAL DENSITY

[SISO Ant.1]

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11b	2412	1	-1.401	0.62	-0.783	8 dBm / 3 kHz
	2437	6	-2.011	0.62	-1.393	
	2462	11	-1.646	0.62	-1.028	
	2467	12	-16.966	0.62	-16.348	
	2472	13	-16.692	0.62	-16.074	
802.11g	2412	1	-9.400	0.94	-8.458	
	2437	6	-7.793	0.94	-6.851	
	2462	11	-9.653	0.94	-8.711	
	2467	12	-20.824	0.94	-19.882	
	2472	13	-20.888	0.94	-19.946	
802.11n(HT20)	2412	1	-9.498	1.67	-7.825	
	2437	6	-8.176	1.67	-6.503	
	2462	11	-9.161	1.67	-7.488	
	2467	12	-21.039	1.67	-19.366	
	2472	13	-21.338	1.67	-19.665	

[MIMO Ant.1]

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11n(HT20)	2412	1	-11.120	1.97	-9.147	8 dBm / 3 kHz
	2437	6	-13.814	1.97	-11.841	
	2462	11	-10.682	1.97	-8.709	
	2467	12	-21.268	1.97	-19.295	
	2472	13	-20.727	1.97	-18.754	

[MIMO Ant.2]

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11n(HT20)	2412	1	-12.048	1.97	-10.075	8 dBm / 3 kHz
	2437	6	-8.828	1.97	-6.855	
	2462	11	-12.395	1.97	-10.422	
	2467	12	-21.799	1.97	-19.826	
	2472	13	-21.210	1.97	-19.237	

[MIMO Ant1. + Ant.2]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Ant.1 Measured Power(dBm) + Duty Cycle Factor	Ant.2 Measured Power(dBm) + Duty Cycle Factor	MIMO Measured Power(dBm)	Limit (dBm)
802.11n(HT20)	2412	1	-9.147	-10.075	-6.576	8 dBm / 3 kHz
	2437	6	-11.841	-6.855	-5.659	
	2462	11	-8.709	-10.422	-6.471	
	2467	12	-19.295	-19.826	-16.542	
	2472	13	-18.754	-19.237	-15.979	

Note :

1. Spectrum Measured Levels are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(10 dB) + Cable loss


▣ Test Plots

[SISO Ant.1]


Power Spectral Density (802.11b-CH 1)

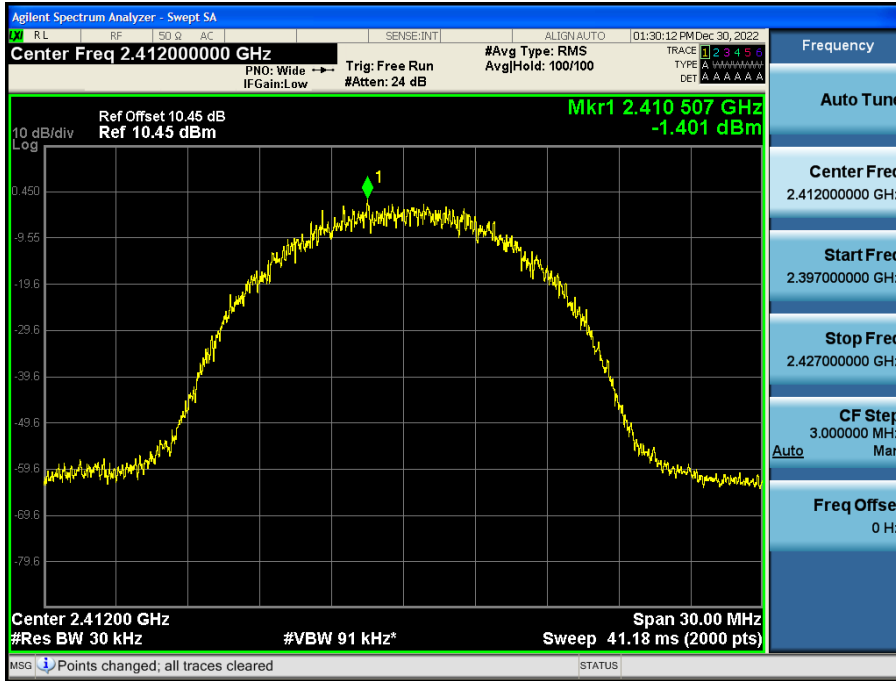

Power Spectral Density (802.11g-CH 6)

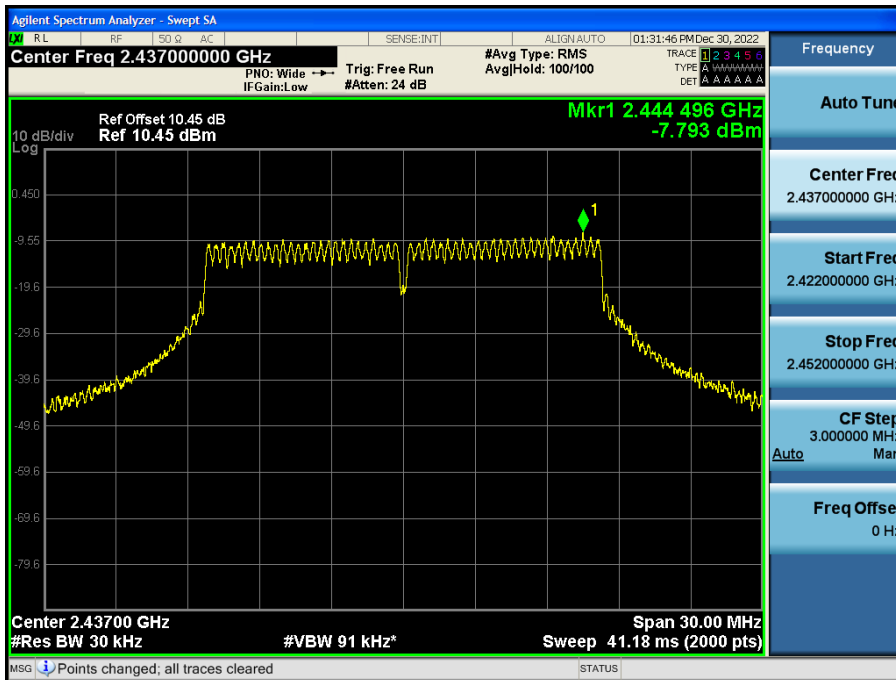


Power Spectral Density (802.11n_HT20-CH 6)

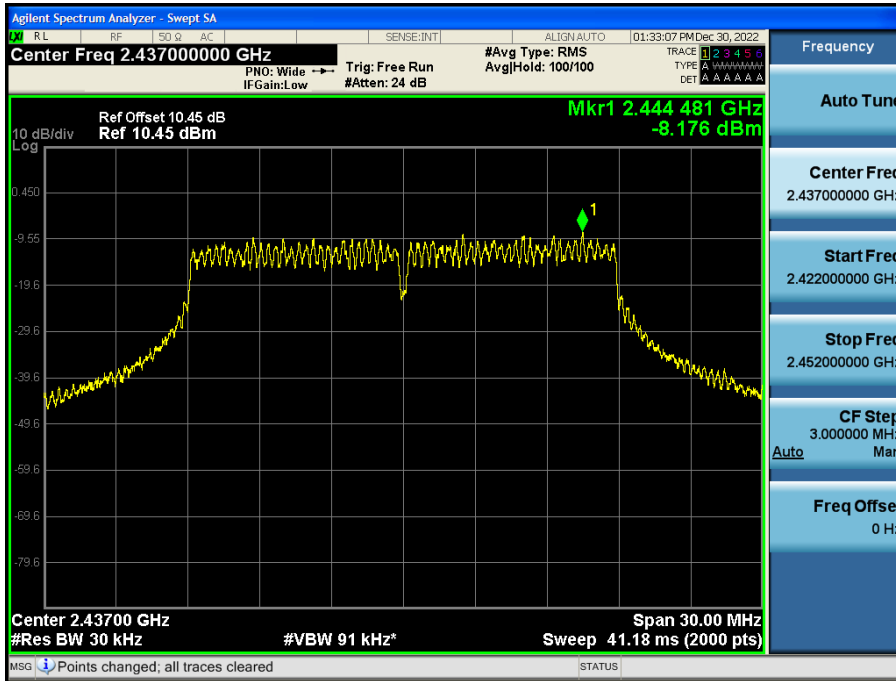


[MIMO Ant.1]

Power Spectral Density (802.11n_HT20-CH 6)

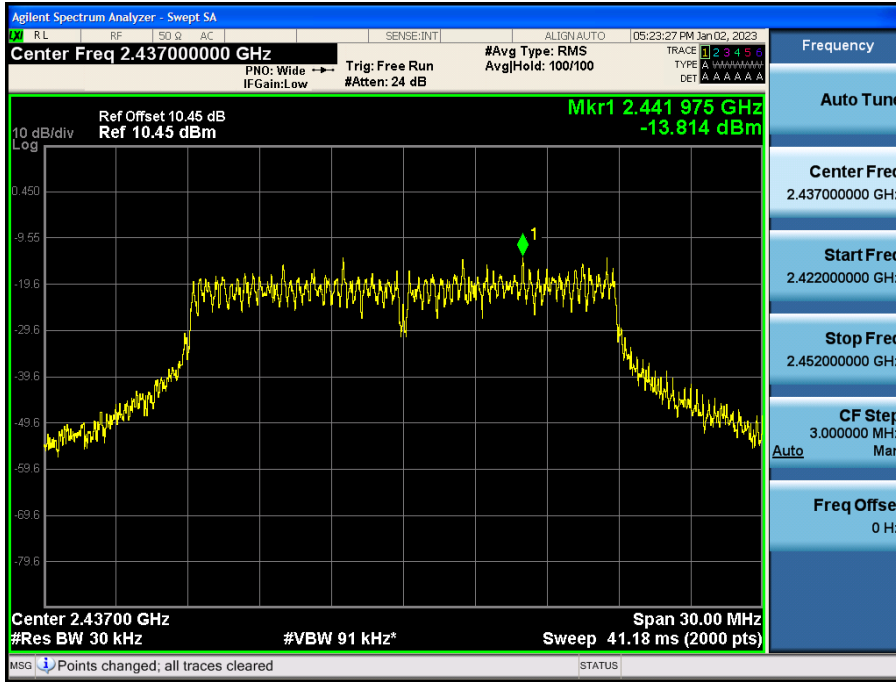

[MIMO Ant.2]

Power Spectral Density (802.11n_HT20-CH 6)

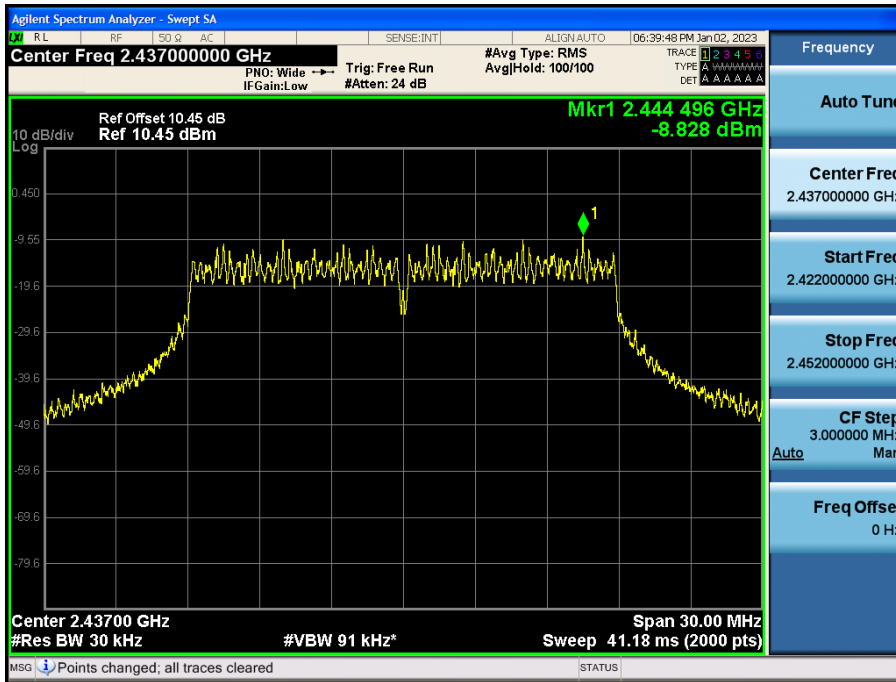

Note :

In order to simplify the report, attached plots were only the worst case PSD channel.

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

[SISO Ant.1]

▣ Test Plots(Band Edge)


Band Edge (802.11b-CH1)

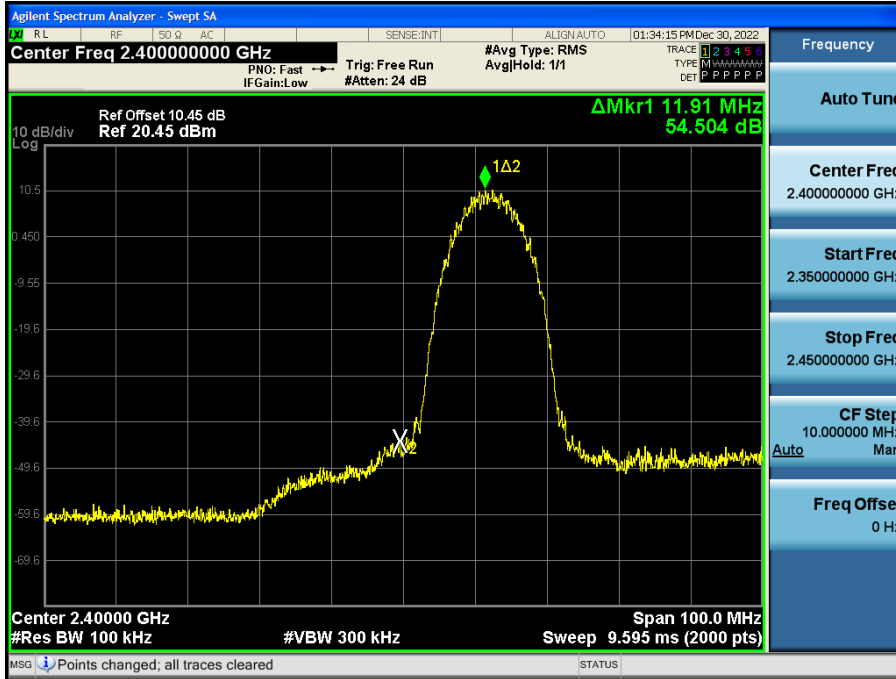


Band Edge (802.11b-CH11)




Band Edge (802.11b-CH12)

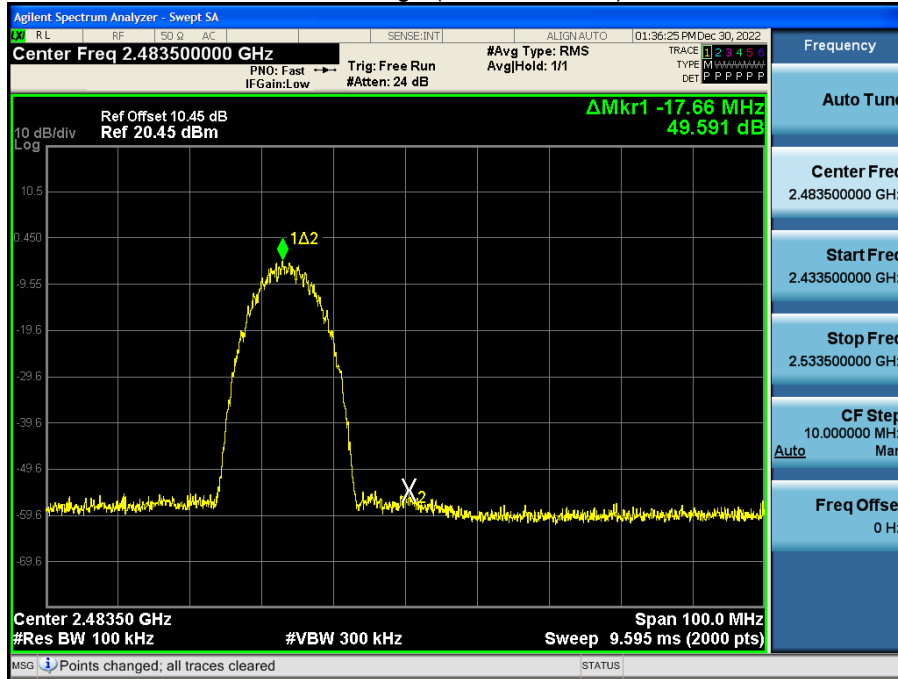


Band Edge (802.11b-CH13)

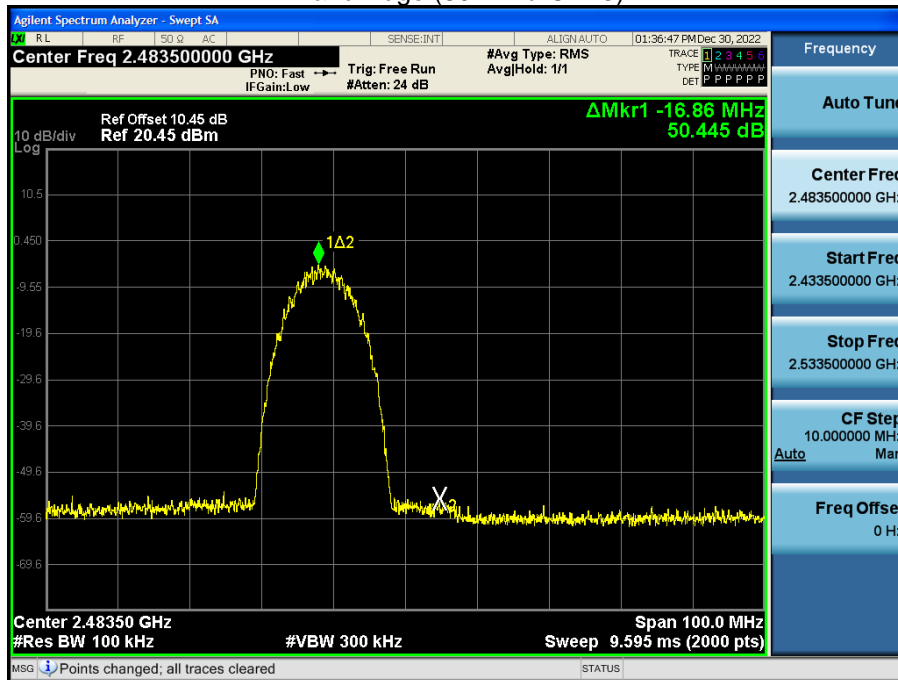


Band Edge (802.11g-CH1)

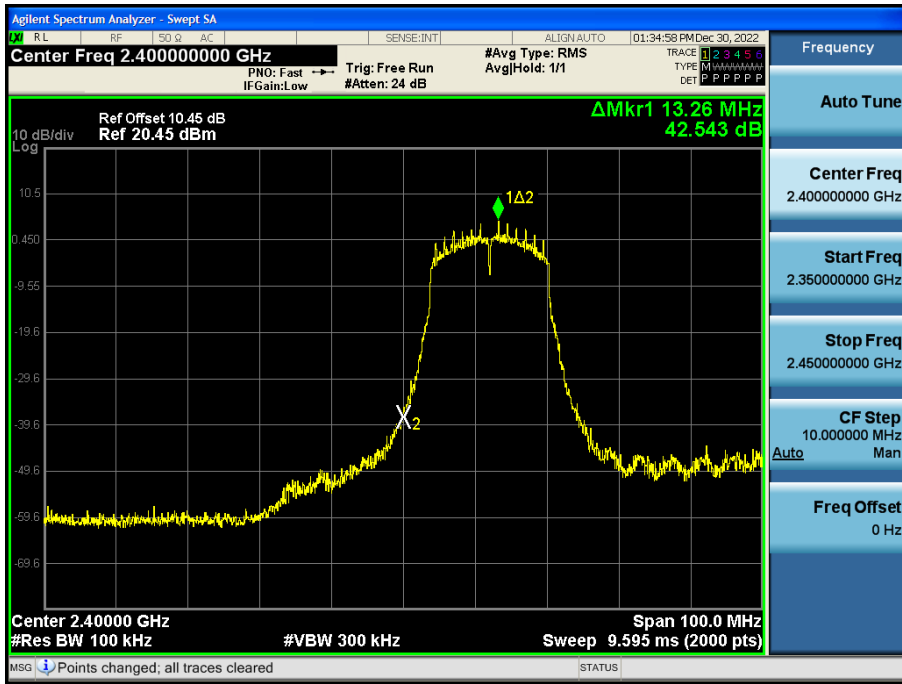


Band Edge (802.11g-CH11)

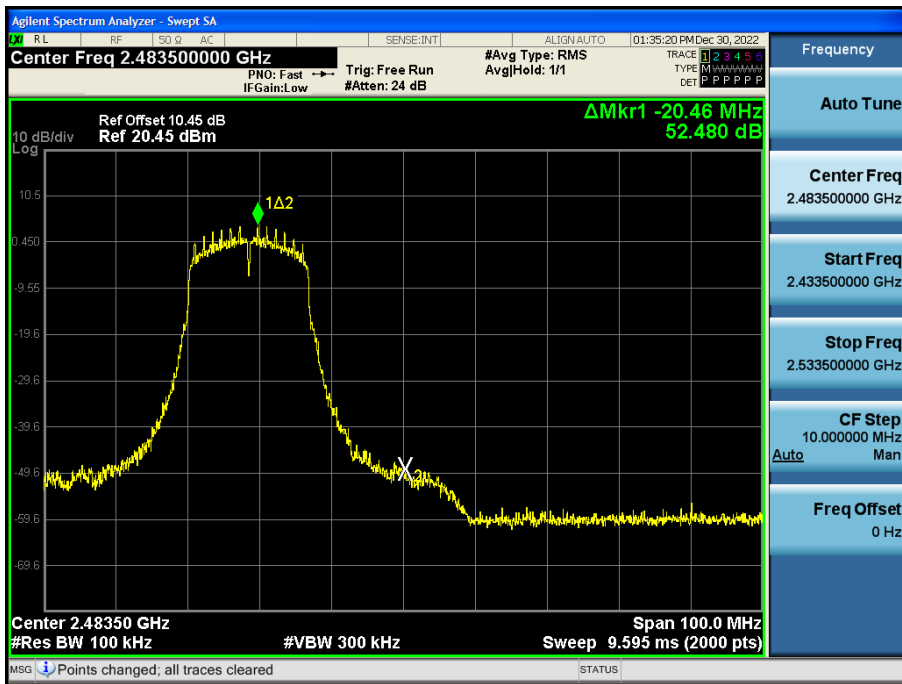


Band Edge (802.11g-CH12)

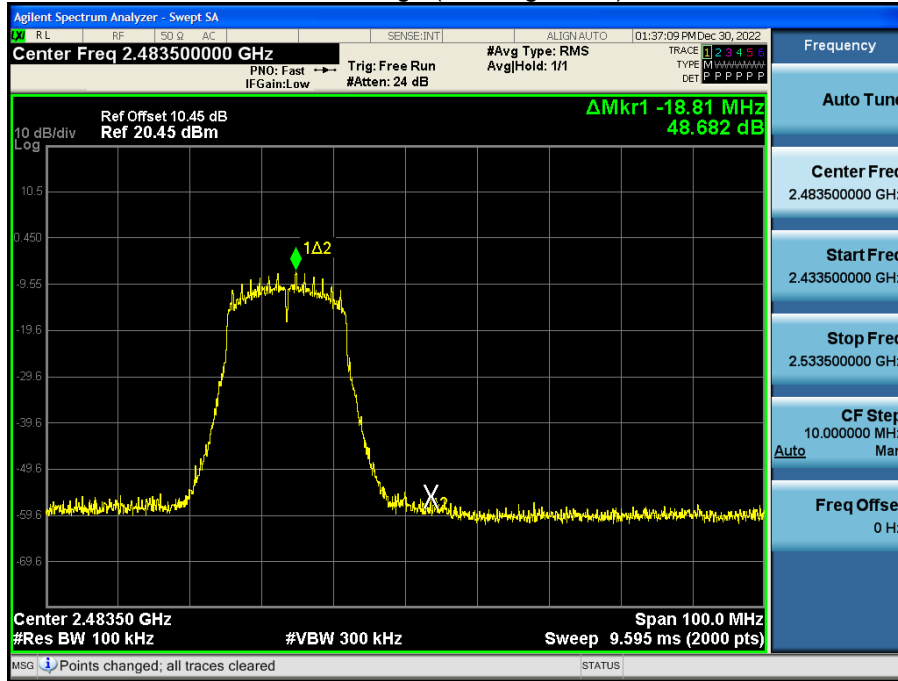


Band Edge (802.11g-CH13)

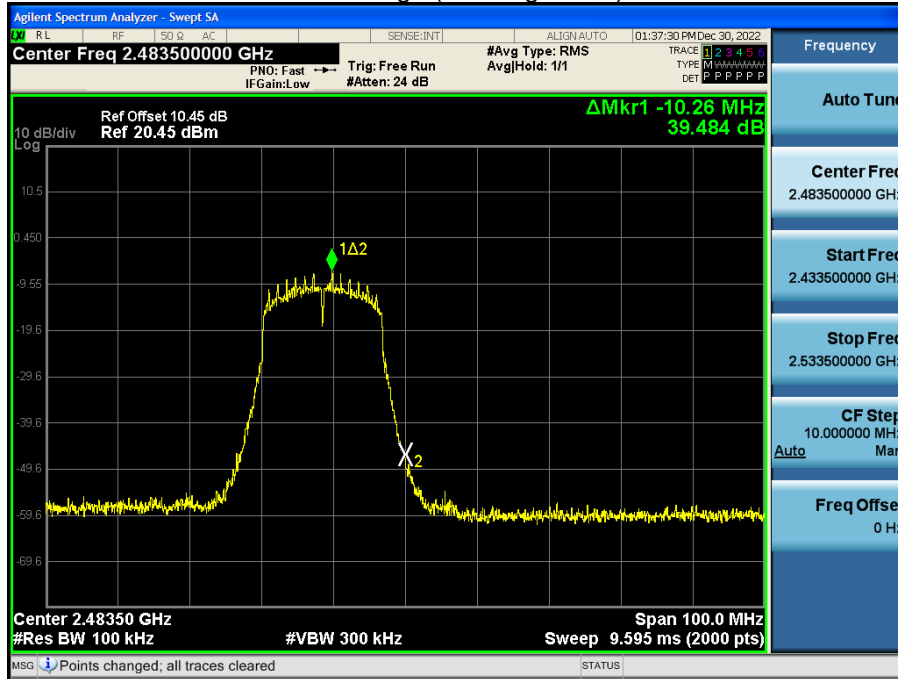


Band Edge (802.11n_HT20-CH1)

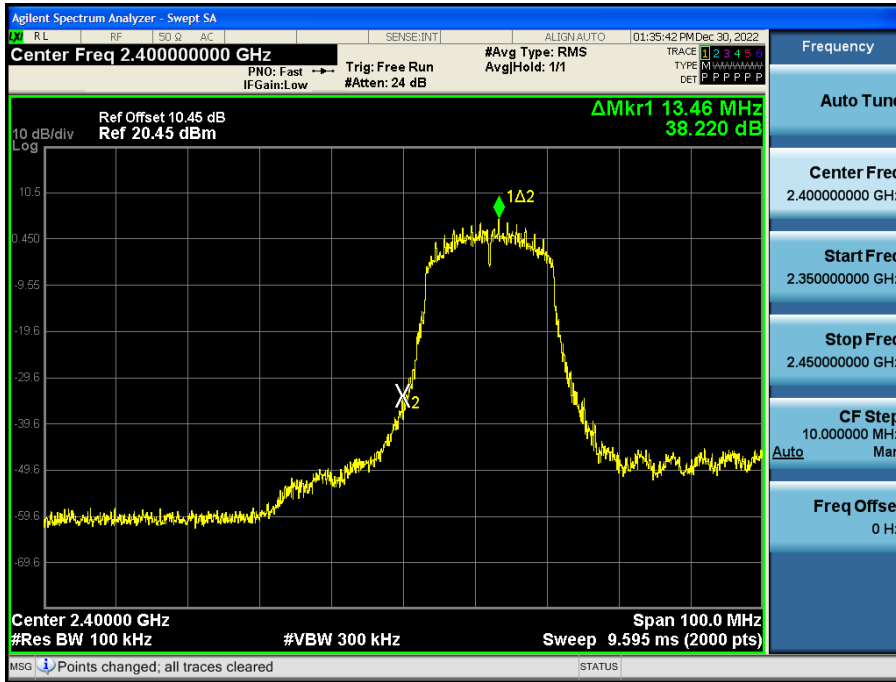


Band Edge (802.11n_HT20-CH11)

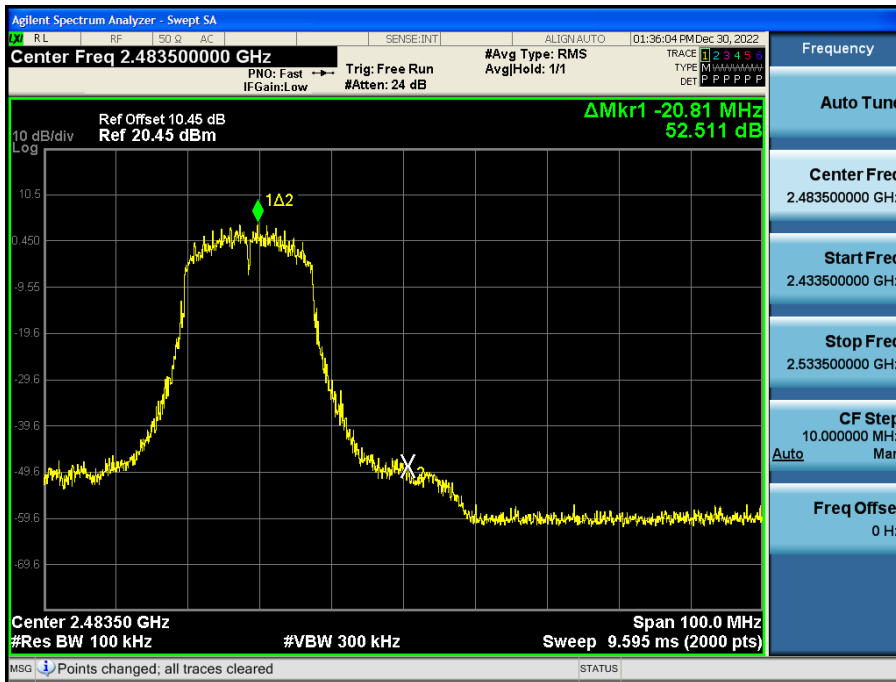

Band Edge (802.11n_HT20-CH12)

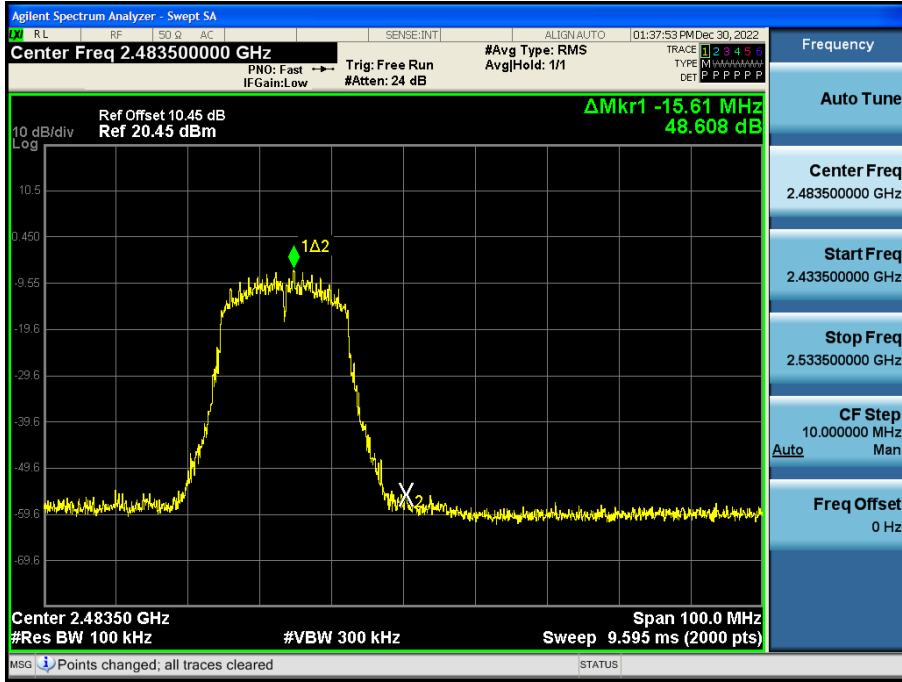


Band Edge (802.11n_HT20-CH13)

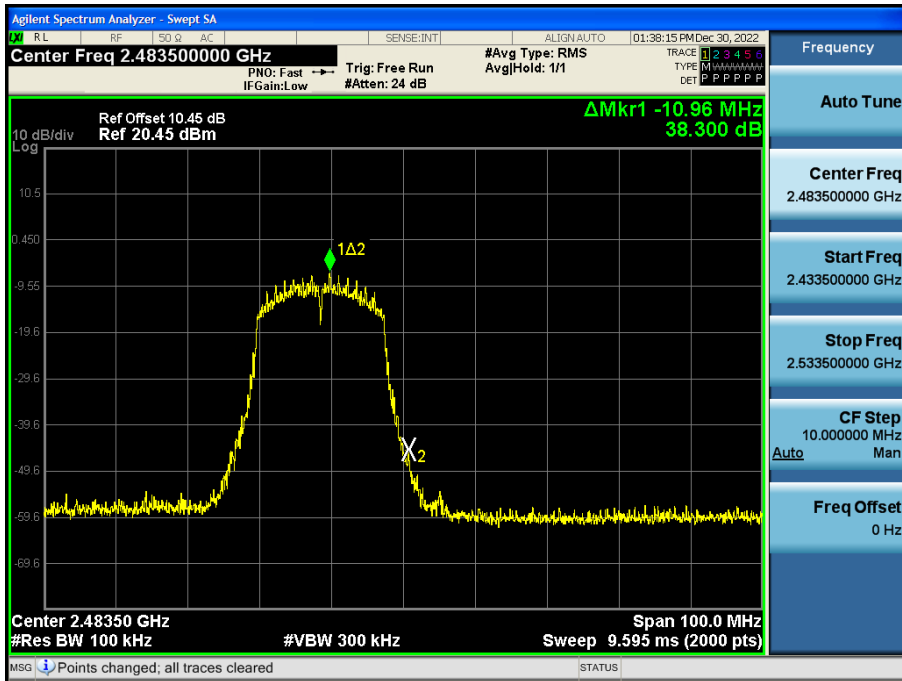


[MIMO Ant.1]

☑ Test Plots(Band Edge)


Band Edge (802.11n_HT20-CH1)

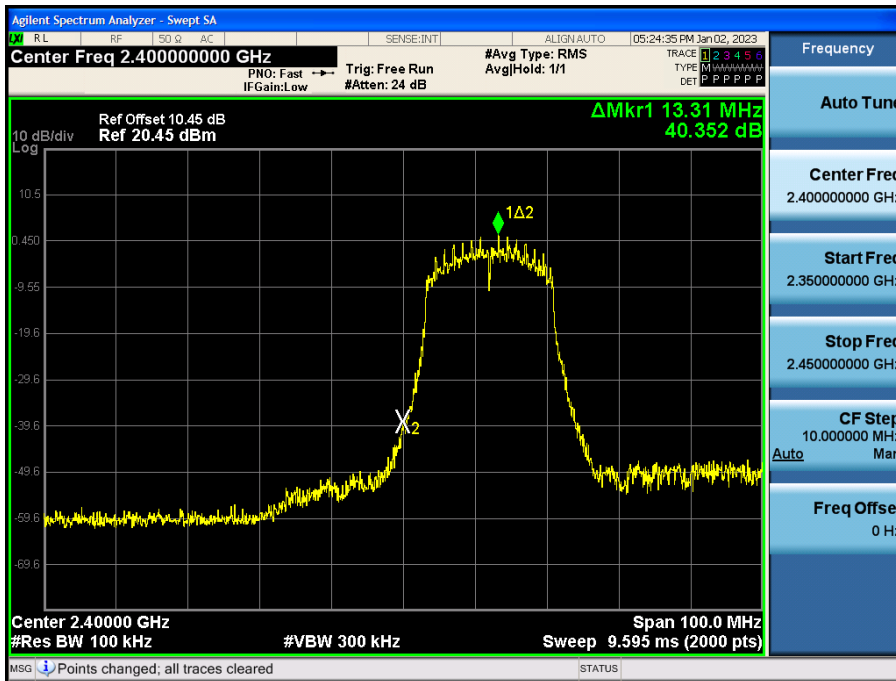


Band Edge (802.11n_HT20-CH11)

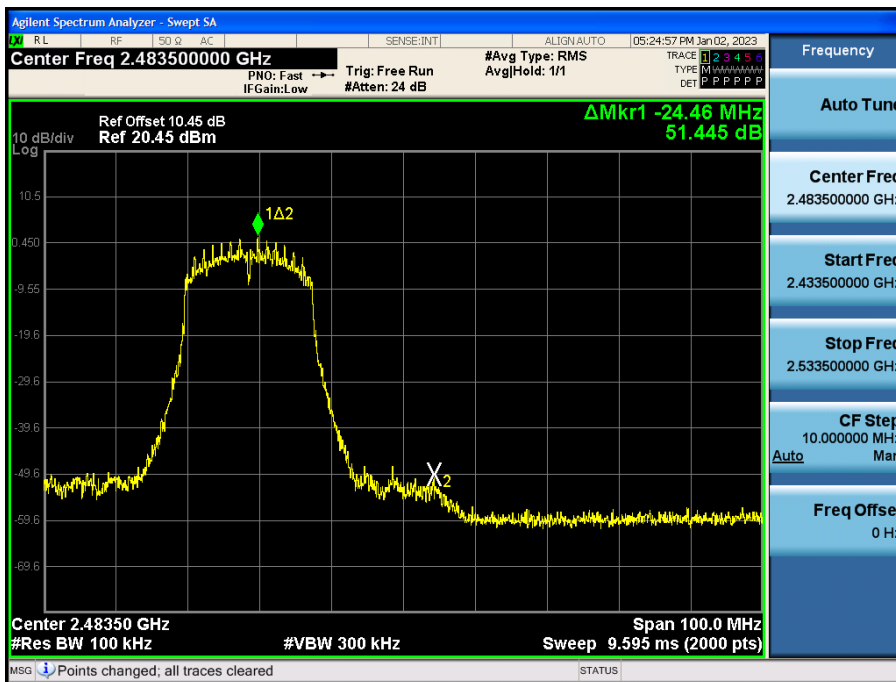

Band Edge (802.1n_HT20-CH12)

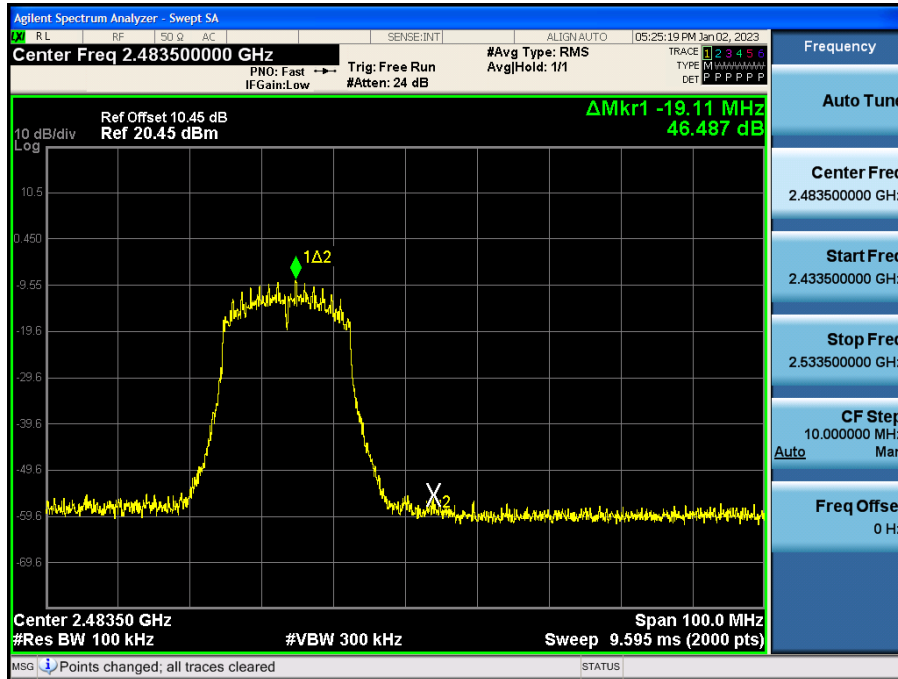


Band Edge (802.11n_HT20-CH13)

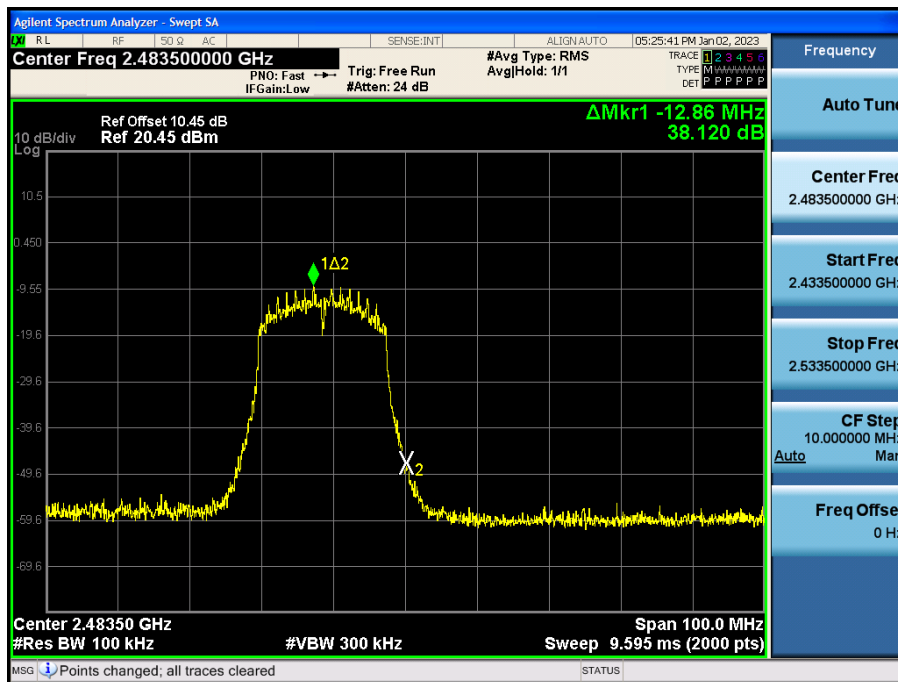


[MIMO Ant.2]

☑ Test Plots(Band Edge)


Band Edge (802.11n_HT20-CH1)

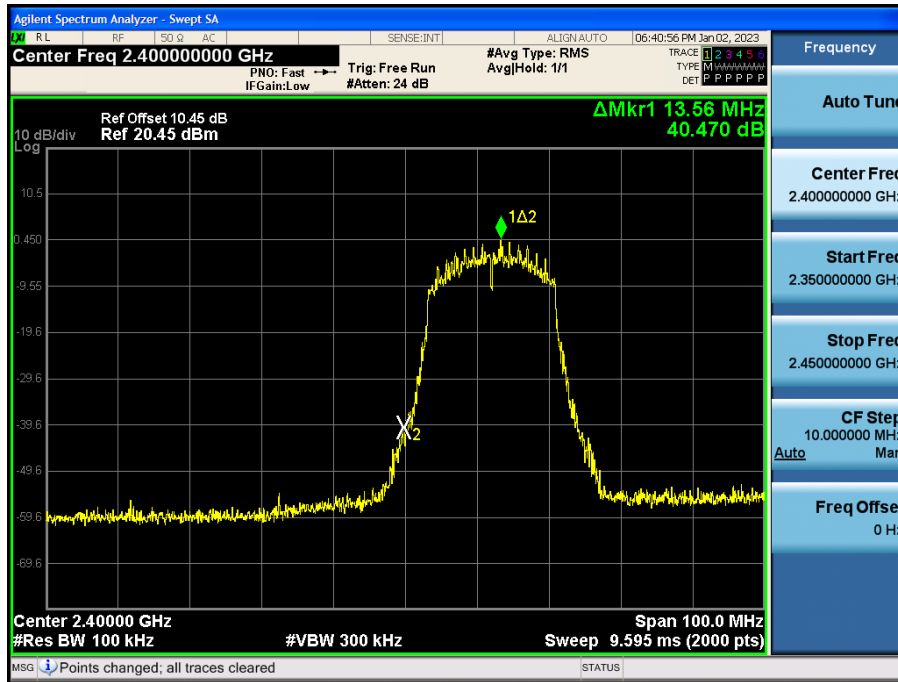


Band Edge (802.11n_HT20-CH11)

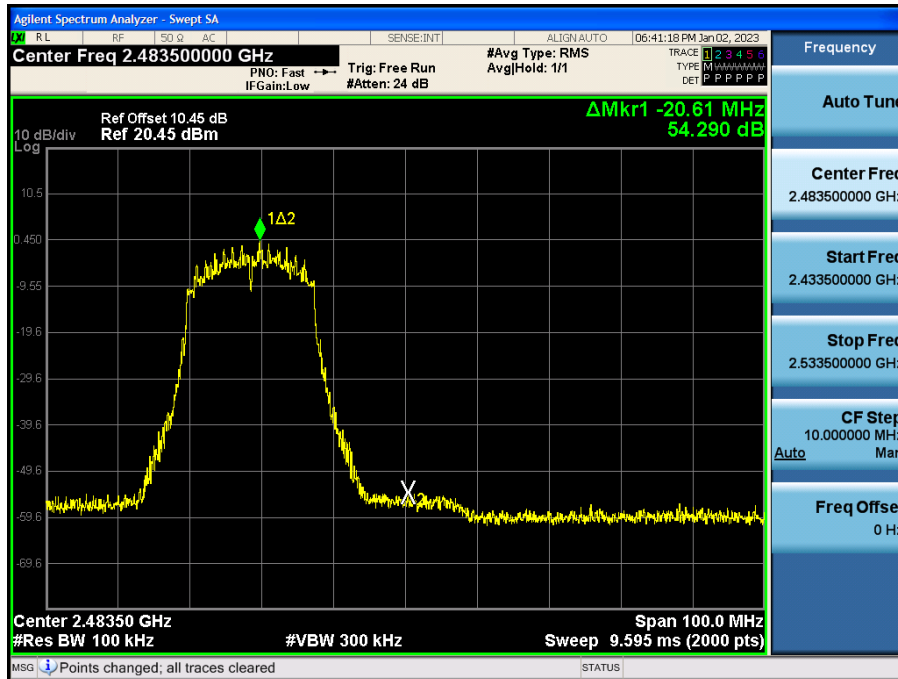

Band Edge (802.11n_HT20-CH12)

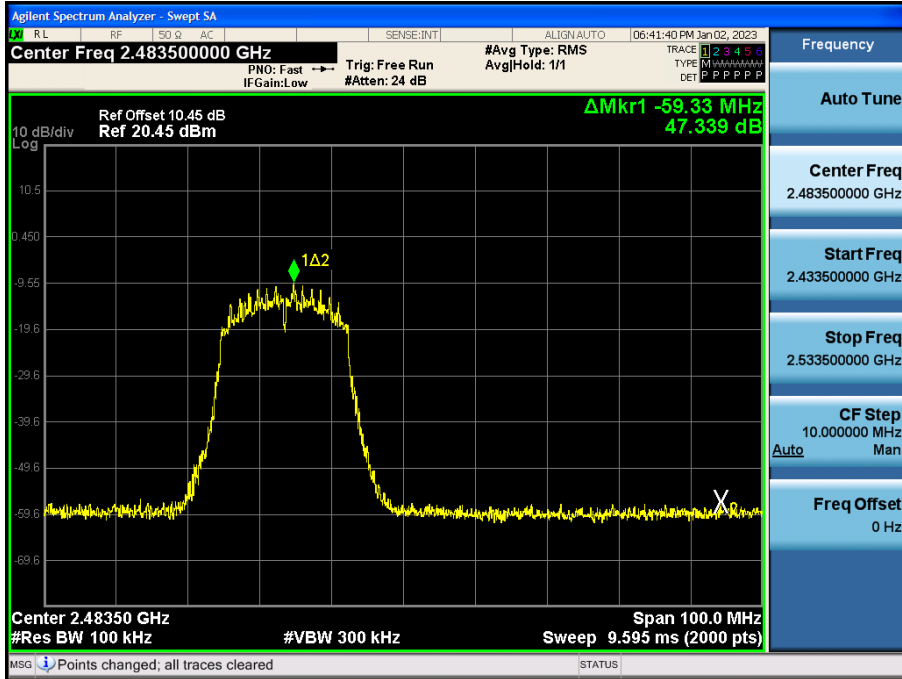

Band Edge (802.11n_HT20-CH13)

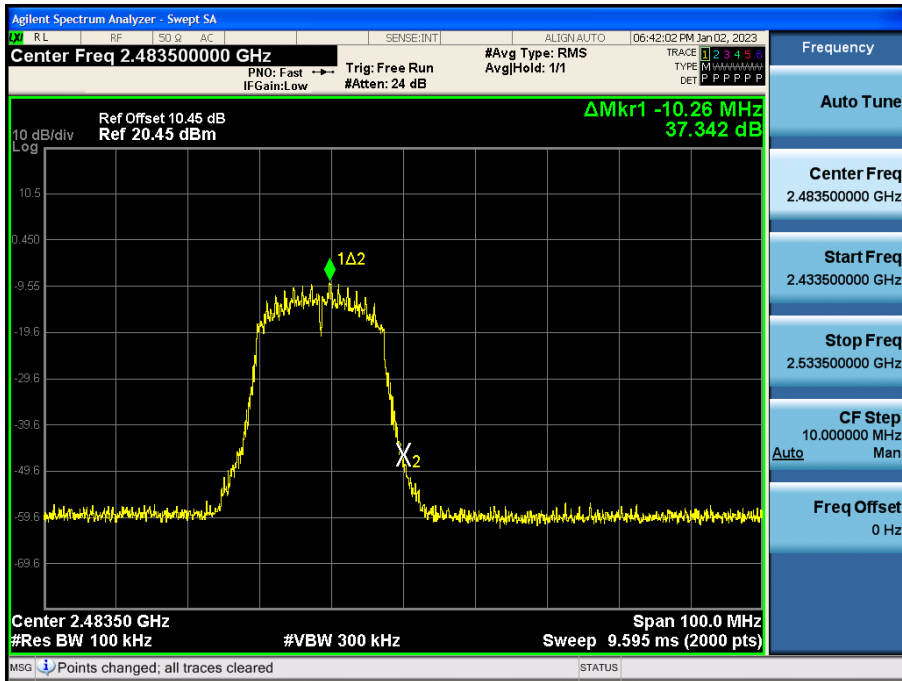


☑ Test Plots(Conducted Spurious Emission) 30 MHz ~ 26.5 GHz


[SISO Ant.1]

30 MHz ~ 26.5 GHz


802.11b_Ch.1_11 Mbps

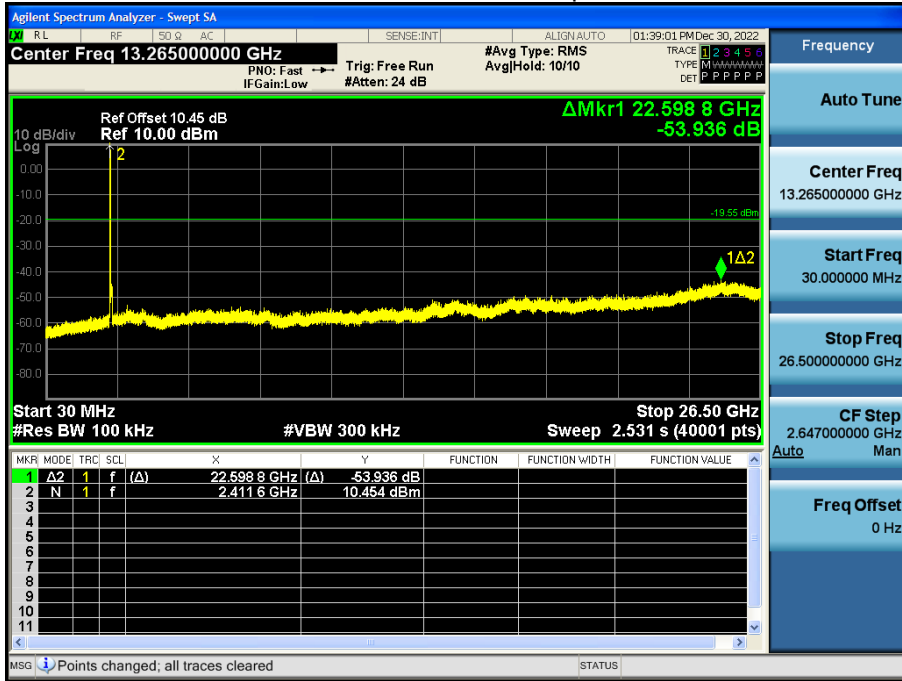

802.11b_Ch.6_11 Mbps

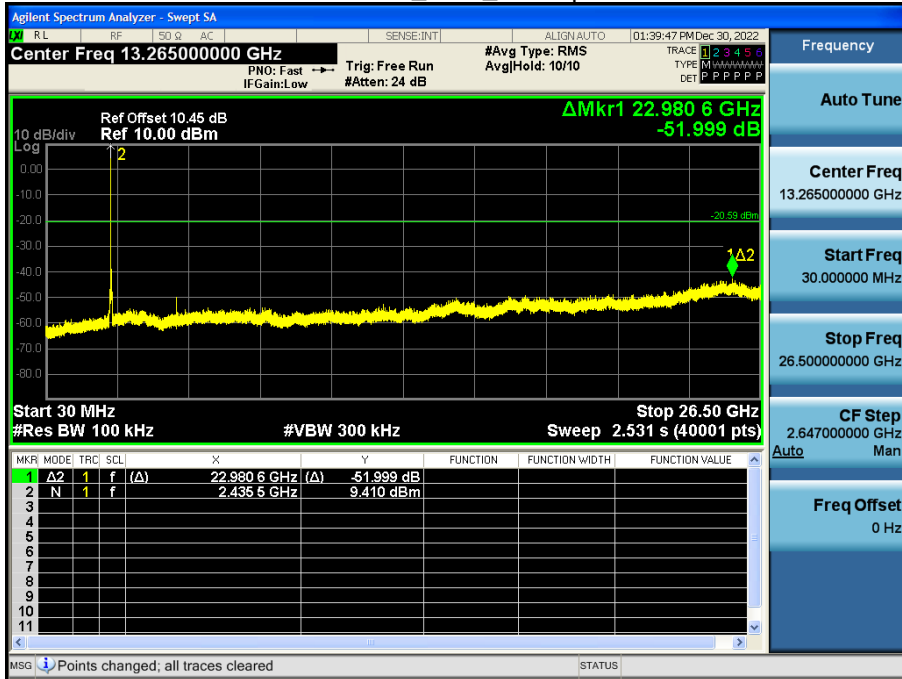


802.11b_Ch.11_11 Mbps

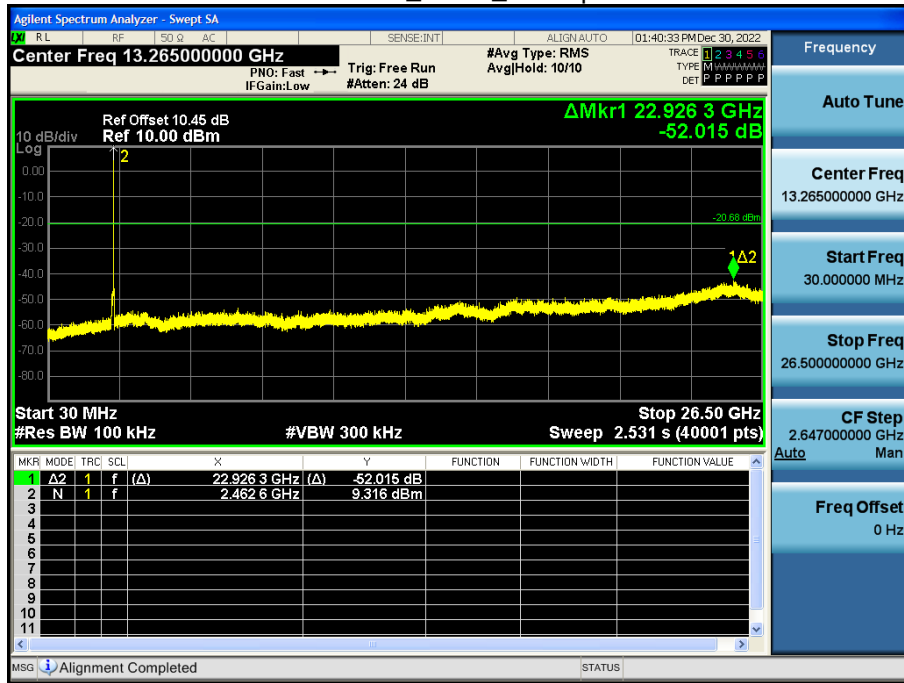


[MIMO Ant.1]


802.11n_HT20_Ch.1_MCS11

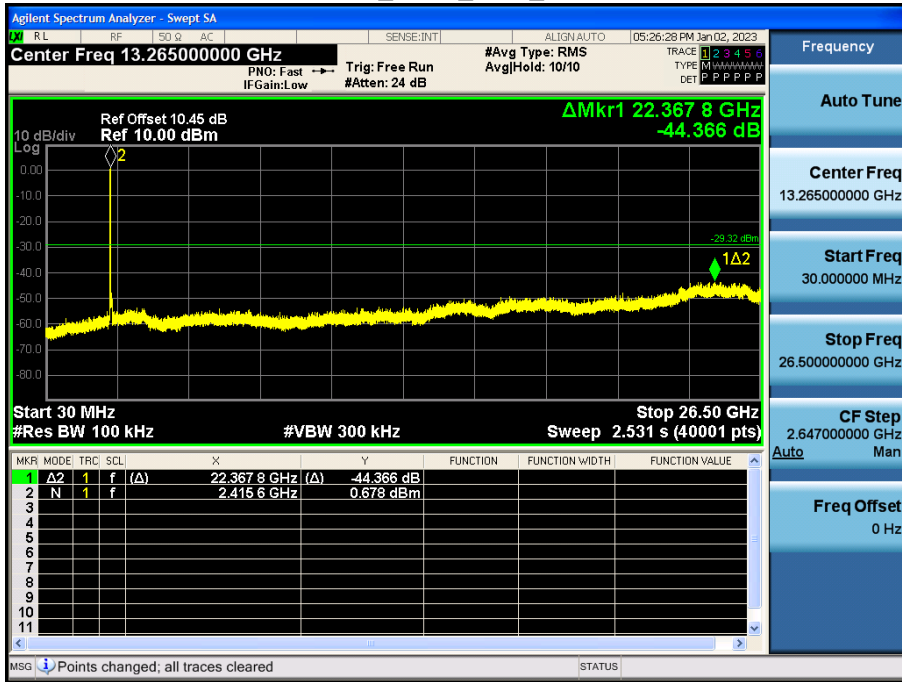

802.11n_HT20_Ch.6_MCS11

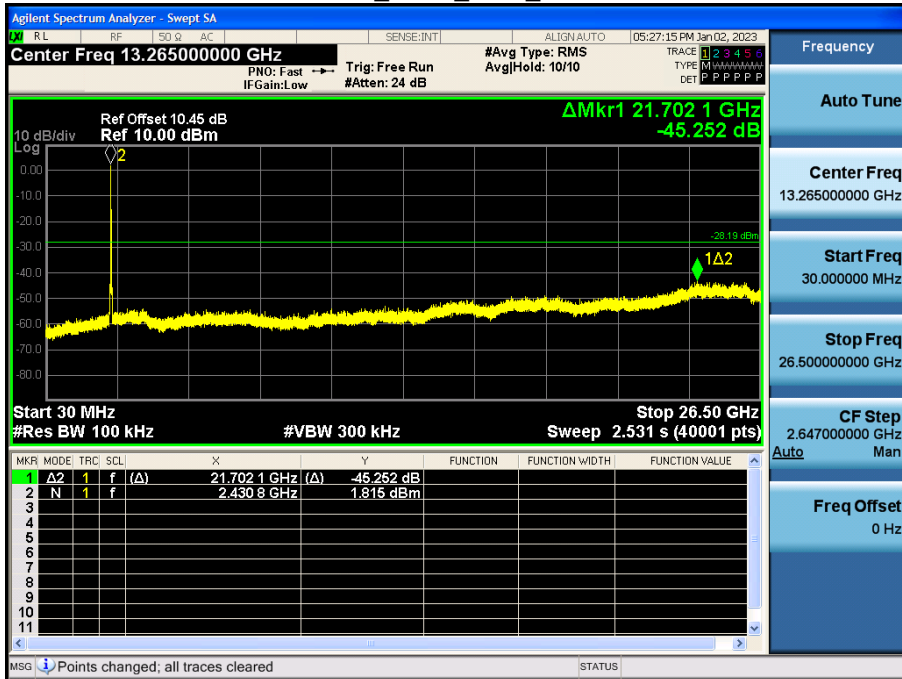


802.11n_HT20_Ch.11_MCS11

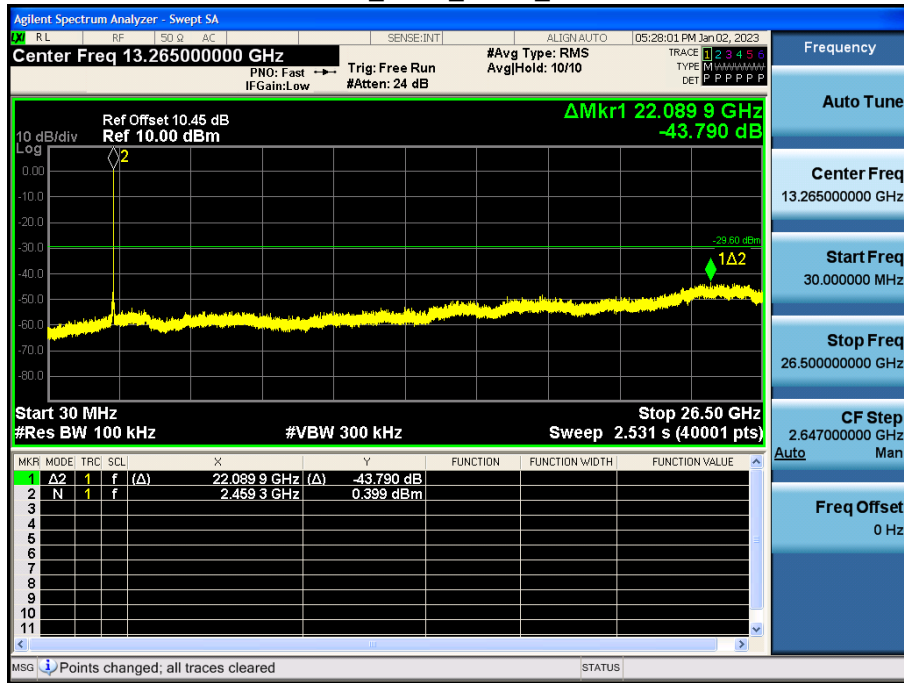


[MIMO Ant.2]


802.11n_HT20_Ch.1_MCS11

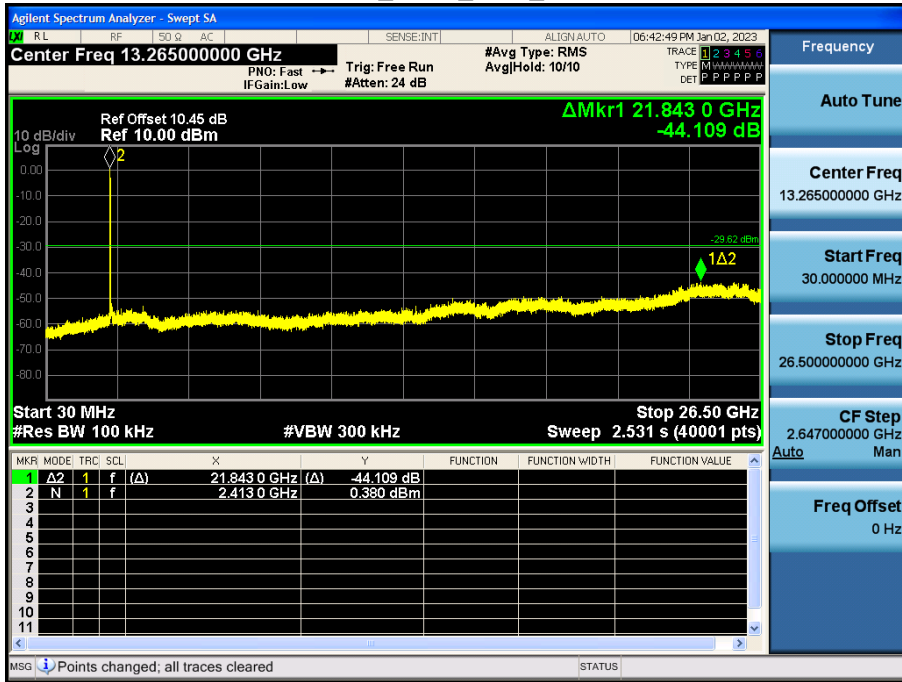

802.11n_HT20_Ch.6_MCS11

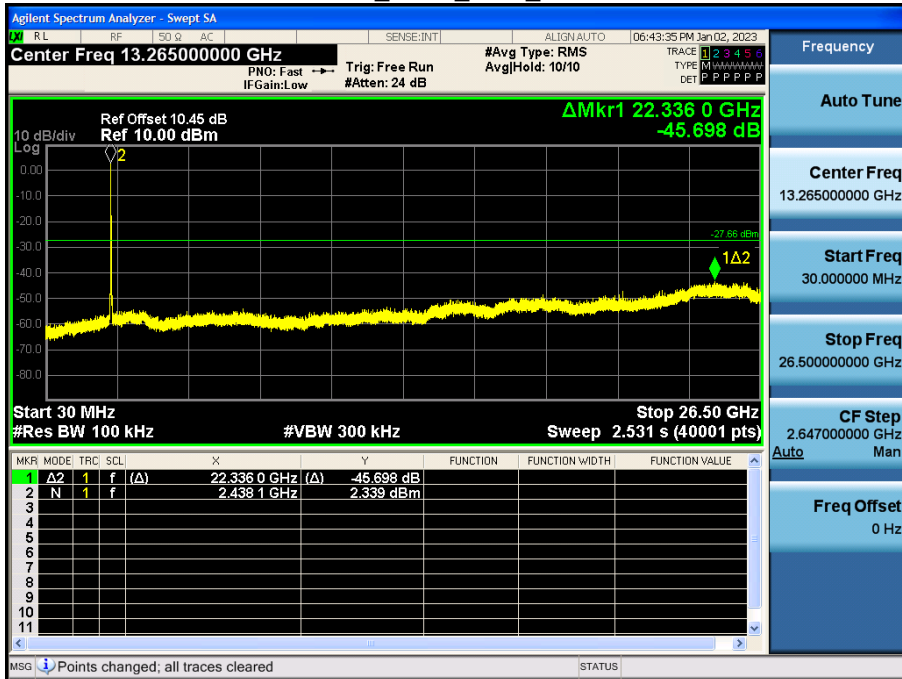

802.11n_HT20_Ch.11_MCS11

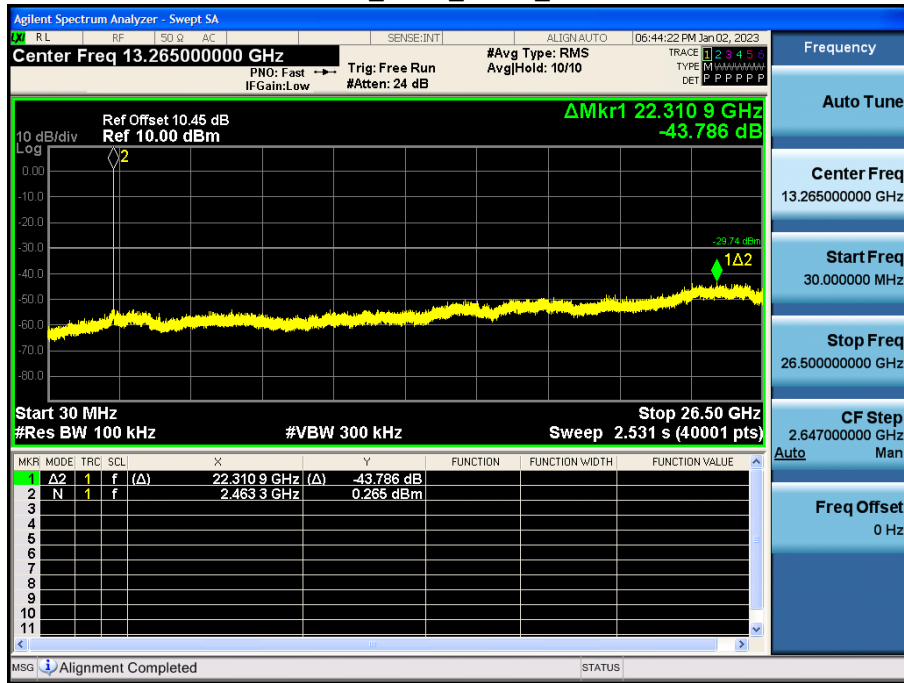

9.6 RADIATED SPURIOUS EMISSIONS**Frequency Range : 9 kHz – 30 MHz**

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz**[SISO Ant.1]**

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4824	49.81	3.57	V	53.38	73.98	20.60	PK
4824	44.35	3.57	V	47.92	53.98	6.06	AV
7236	44.32	12.30	V	56.62	73.98	17.37	PK
7236	35.93	12.30	V	48.23	53.98	5.76	AV
4824	50.02	3.57	H	53.59	73.98	20.39	PK
4824	45.48	3.57	H	49.05	53.98	4.93	AV
7236	43.91	12.30	H	56.21	73.98	17.78	PK
7236	34.75	12.30	H	47.05	53.98	6.94	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437 MHz
 Channel No. 06 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4874	49.85	3.76	V	53.61	73.98	20.38	PK
4874	45.05	3.76	V	48.81	53.98	5.18	AV
7311	41.55	11.51	V	53.06	73.98	20.92	PK
7311	31.87	11.51	V	43.38	53.98	10.60	AV
4874	50.39	3.76	H	54.15	73.98	19.84	PK
4874	46.04	3.76	H	49.80	53.98	4.19	AV
7311	42.79	11.51	H	54.30	73.98	19.68	PK
7311	32.91	11.51	H	44.42	53.98	9.56	AV

Operation Mode: 802.11b
Transfer Rate: 1 Mbps
Operating Frequency: 2462 MHz
Channel No.: 11 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4924	47.06	4.78	V	51.84	73.98	22.14	PK
4924	42.51	4.78	V	47.29	53.98	6.69	AV
7386	42.07	12.03	V	54.10	73.98	19.88	PK
7386	32.33	12.03	V	44.36	53.98	9.62	AV
4924	48.39	4.78	H	53.17	73.98	20.81	PK
4924	43.45	4.78	H	48.23	53.98	5.75	AV
7386	41.36	12.03	H	53.39	73.98	20.59	PK
7386	31.29	12.03	H	43.32	53.98	10.66	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2412 MHz
Channel No. 01 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4824	51.84	0.00	3.57	V	55.41	73.98	18.57	PK
4824	38.29	0.29	3.57	V	42.15	53.98	11.83	AV
7236	41.48	0.00	12.30	V	53.78	73.98	20.21	PK
7236	28.85	0.29	12.30	V	41.44	53.98	12.55	AV
4824	52.27	0.00	3.57	H	55.84	73.98	18.14	PK
4824	39.71	0.29	3.57	H	43.57	53.98	10.41	AV
7236	42.17	0.00	12.30	H	54.47	73.98	19.52	PK
7236	29.81	0.29	12.30	H	42.40	53.98	11.59	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2437 MHz
Channel No. 06 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4874	52.64	0.00	3.76	V	56.40	73.98	17.59	PK
4874	40.82	0.29	3.76	V	44.87	53.98	9.12	AV
7311	40.45	0.00	11.51	V	51.96	73.98	22.02	PK
7311	29.16	0.29	11.51	V	40.96	53.98	13.02	AV
4874	52.88	0.00	3.76	H	56.64	73.98	17.35	PK
4874	41.53	0.29	3.76	H	45.58	53.98	8.41	AV
7311	41.23	0.00	11.51	H	52.74	73.98	21.24	PK
7311	29.22	0.29	11.51	H	41.02	53.98	12.96	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2462 MHz
Channel No. 11 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4924	48.46	0.00	4.78	V	53.24	73.98	20.74	PK
4924	36.98	0.29	4.78	V	42.05	53.98	11.93	AV
7386	39.90	0.00	12.03	V	51.93	73.98	22.05	PK
7386	28.53	0.29	12.03	V	40.85	53.98	13.13	AV
4924	49.55	0.00	4.78	H	54.33	73.98	19.65	PK
4924	37.07	0.29	4.78	H	42.14	53.98	11.84	AV
7386	40.08	0.00	12.03	H	52.11	73.98	21.87	PK
7386	28.61	0.29	12.03	H	40.93	53.98	13.05	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz
 Channel No.: 01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	50.19	0.00	3.57	V	53.76	73.98	20.22	PK
4824	38.75	0.36	3.57	V	42.68	53.98	11.30	AV
7236	40.20	0.00	12.30	V	52.50	73.98	21.49	PK
7236	29.68	0.36	12.30	V	42.34	53.98	11.65	AV
4824	52.11	0.00	3.57	H	55.68	73.98	18.30	PK
4824	39.20	0.36	3.57	H	43.13	53.98	10.85	AV
7236	42.24	0.00	12.30	H	54.54	73.98	19.45	PK
7236	29.73	0.36	12.30	H	42.39	53.98	11.60	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2437 MHz
 Channel No.: 06 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	51.84	0.00	3.76	V	55.60	73.98	18.39	PK
4874	40.76	0.36	3.76	V	44.88	53.98	9.11	AV
7311	40.93	0.00	11.51	V	52.44	73.98	21.54	PK
7311	29.02	0.36	11.51	V	40.89	53.98	13.09	AV
4874	52.90	0.00	3.76	H	56.66	73.98	17.33	PK
4874	41.12	0.36	3.76	H	45.24	53.98	8.75	AV
7311	41.02	0.00	11.51	H	52.53	73.98	21.45	PK
7311	29.16	0.36	11.51	H	41.03	53.98	12.95	AV

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2462 MHz
Channel No.: 11 Ch


Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4924	48.49	0.00	4.78	V	53.27	73.98	20.71	PK
4924	35.77	0.36	4.78	V	40.91	53.98	13.07	AV
7386	40.08	0.00	12.03	V	52.11	73.98	21.87	PK
7386	28.49	0.36	12.03	V	40.88	53.98	13.10	AV
4924	48.95	0.00	4.78	H	53.73	73.98	20.25	PK
4924	36.93	0.36	4.78	H	42.07	53.98	11.91	AV
7386	40.91	0.00	12.03	H	52.94	73.98	21.04	PK
7386	28.63	0.36	12.03	H	41.02	53.98	12.96	AV

Note:


Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Result (802.11b_1 Mbps, Ch.6 2nd Harmonic)

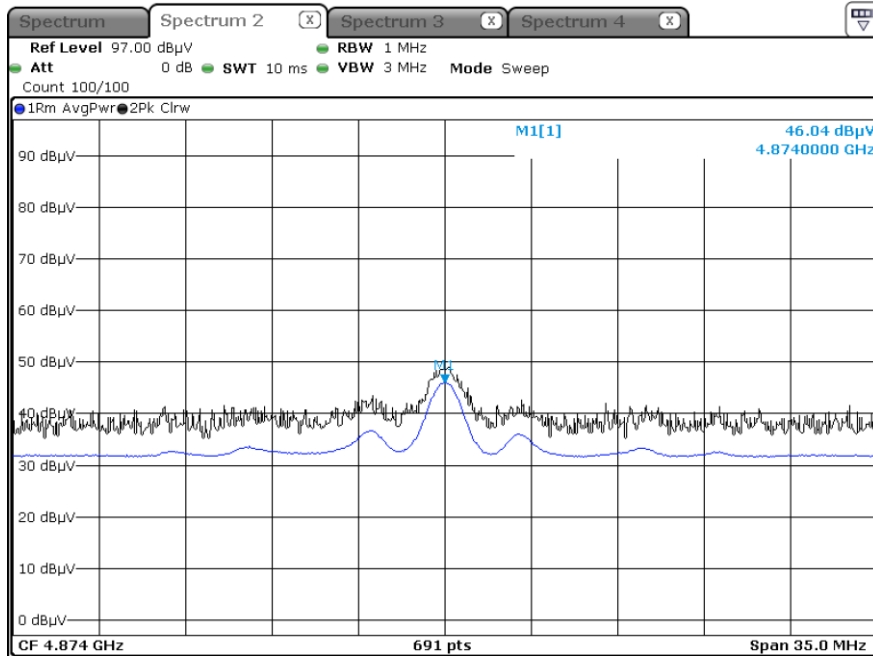

Radiated Spurious Emissions plot – Peak Result (802.11b_1 Mbps, Ch.6 2nd Harmonic)

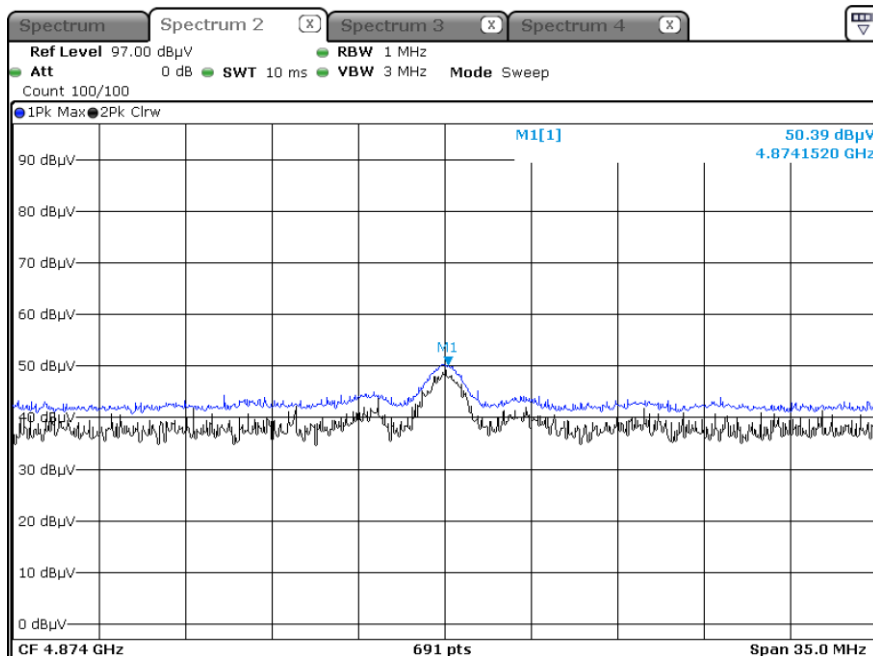

Note: Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES**[SISO Ant.1]**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	29.166	34.50	H	63.67	73.98	10.31	PK
2390.0	11.290	34.50	H	45.79	53.98	8.19	AV
2390.0	27.912	34.50	V	62.41	73.98	11.57	PK
2390.0	10.907	34.50	V	45.41	53.98	8.57	AV
2483.5	32.590	34.87	H	67.46	73.98	6.52	PK
2483.5	12.618	34.87	H	47.49	53.98	6.49	AV
2483.5	32.450	34.87	V	67.32	73.98	6.66	PK
2483.5	11.920	34.87	V	46.79	53.98	7.19	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	22.818	34.87	H	57.69	73.98	16.29	PK
2483.5	11.677	34.87	H	46.55	53.98	7.43	AV
2483.5	21.151	34.87	V	56.03	73.98	17.95	PK
2483.5	11.040	34.87	V	45.91	53.98	8.07	AV
2483.5	22.400	34.87	H	57.27	73.98	16.71	PK
2483.5	11.778	34.87	H	46.65	53.98	7.33	AV
2483.5	21.880	34.87	V	56.75	73.98	17.23	PK
2483.5	11.540	34.87	V	46.41	53.98	7.57	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2412 MHz, 2462 MHz
Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	29.306	0.00	34.50	H	63.81	73.98	10.17	PK
2390.0	10.657	0.29	34.50	H	45.45	53.98	8.53	AV
2390.0	28.623	0.00	34.50	V	63.12	73.98	10.86	PK
2390.0	10.520	0.29	34.50	V	45.31	53.98	8.67	AV
2483.5	33.063	0.00	34.87	H	67.94	73.98	6.04	PK
2483.5	14.788	0.29	34.87	H	49.95	53.98	4.03	AV
2483.5	32.013	0.00	34.87	V	66.89	73.98	7.09	PK
2483.5	13.552	0.29	34.87	V	48.72	53.98	5.26	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2417 MHz
Channel No. 2 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	30.784	0.00	34.50	H	65.29	73.98	8.69	PK
2390.0	13.126	0.29	34.50	H	47.92	53.98	6.06	AV
2390.0	29.688	0.00	34.50	V	64.19	73.98	9.79	PK
2390.0	12.694	0.29	34.50	V	47.49	53.98	6.49	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2457 MHz
 Channel No. 10 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	32.501	0.00	34.87	H	67.38	73.98	6.60	PK
#2483.5~2484.5	16.300	0.29	34.87	H	51.46	53.98	2.52	AV
2484.5	16.070	0.29	34.87	H	51.23	53.98	2.75	AV
2483.5	31.767	0.00	34.87	V	66.64	73.98	7.34	PK
#2483.5~2484.5	15.920	0.29	34.87	V	51.08	53.98	2.90	AV
2484.5	15.876	0.29	34.87	V	51.04	53.98	2.94	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No. 12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	27.879	0.00	34.87	H	62.75	73.98	11.23	PK
2483.5	12.563	0.29	34.87	H	47.73	53.98	6.25	AV
2483.5	26.500	0.00	34.87	V	61.37	73.98	12.61	PK
2483.5	11.940	0.29	34.87	V	47.10	53.98	6.88	AV
2483.5	32.859	0.00	34.87	H	67.73	73.98	6.25	PK
#2483.5~2484.5	12.830	0.29	34.87	H	47.99	53.98	5.99	AV
2484.5	11.341	0.29	34.87	H	46.51	53.98	7.47	AV
2483.5	32.247	0.00	34.87	V	67.12	73.98	6.86	PK
#2483.5~2484.5	11.970	0.29	34.87	V	47.13	53.98	6.85	AV
2484.5	10.952	0.29	34.87	V	46.12	53.98	7.86	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)
Transfer Rate: 0
Operating Frequency: 2412 MHz, 2462 MHz
Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	34.599	0.00	34.50	H	69.10	73.98	4.88	PK
2390.0	15.612	0.36	34.50	H	50.47	53.98	3.51	AV
2390.0	34.384	0.00	34.50	V	68.89	73.98	5.09	PK
2390.0	14.971	0.36	34.50	V	49.83	53.98	4.15	AV
2483.5	32.483	0.00	34.87	H	67.36	73.98	6.62	PK
2483.5	15.046	0.36	34.87	H	50.28	53.98	3.70	AV
2483.5	31.846	0.00	34.87	V	66.72	73.98	7.26	PK
2483.5	14.138	0.36	34.87	V	49.37	53.98	4.61	AV

Operation Mode: 802.11n (HT20)
Transfer Rate: 0
Operating Frequency: 2417 MHz
Channel No. 2 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	30.330	0.00	34.50	H	64.83	73.98	9.15	PK
2390.0	14.367	0.36	34.50	H	49.23	53.98	4.75	AV
2390.0	29.554	0.00	34.50	H	64.06	73.98	9.92	PK
2390.0	13.907	0.36	34.50	V	48.77	53.98	5.21	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	35.888	0.00	34.87	H	70.76	73.98	3.22	PK
#2483.5~2484.5	16.370	0.36	34.87	H	51.60	53.98	2.38	AV
#2484.5~2485.5	14.750	0.00	34.87	H	49.62	53.98	4.36	AV
2485.5~	16.233	0.36	34.87	H	51.47	53.98	2.51	AV
2483.5	35.126	0.00	34.87	H	70.00	73.98	3.98	PK
#2483.5~2484.5	15.880	0.36	34.87	H	51.11	53.98	2.87	AV
#2484.5~2485.5	15.640	0.00	34.87	H	50.51	53.98	3.47	AV
2485.5~	15.988	0.36	34.87	H	51.22	53.98	2.76	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No.: 12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	29.164	0.00	34.87	H	64.04	73.98	9.94	PK
2483.5	12.577	0.36	34.87	H	47.81	53.98	6.17	AV
2483.5	28.430	0.00	34.87	V	63.30	73.98	10.68	PK
2483.5	12.339	0.36	34.87	V	47.57	53.98	6.41	AV
2483.5	36.924	0.00	34.87	H	71.80	73.98	2.18	PK
#2483.5~2484.5	14.460	0.36	34.87	H	49.69	53.98	4.29	AV
2484.5	14.544	0.36	34.87	H	49.78	53.98	4.20	AV
2483.5	35.353	0.00	34.87	V	70.23	73.98	3.75	PK
#2483.5~2484.5	13.250	0.36	34.87	V	48.48	53.98	5.50	AV
2484.5	13.952	0.36	34.87	V	49.19	53.98	4.79	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)


■ Test Plots

Radiated Restricted Band Edges plot – Peak Result (802.11n (HT20)_ MCS0, Ch.13)



Radiated Restricted Band Edges plot – Average Result (802.11n (HT20)_MCS0, Ch.13)

Integration method Used

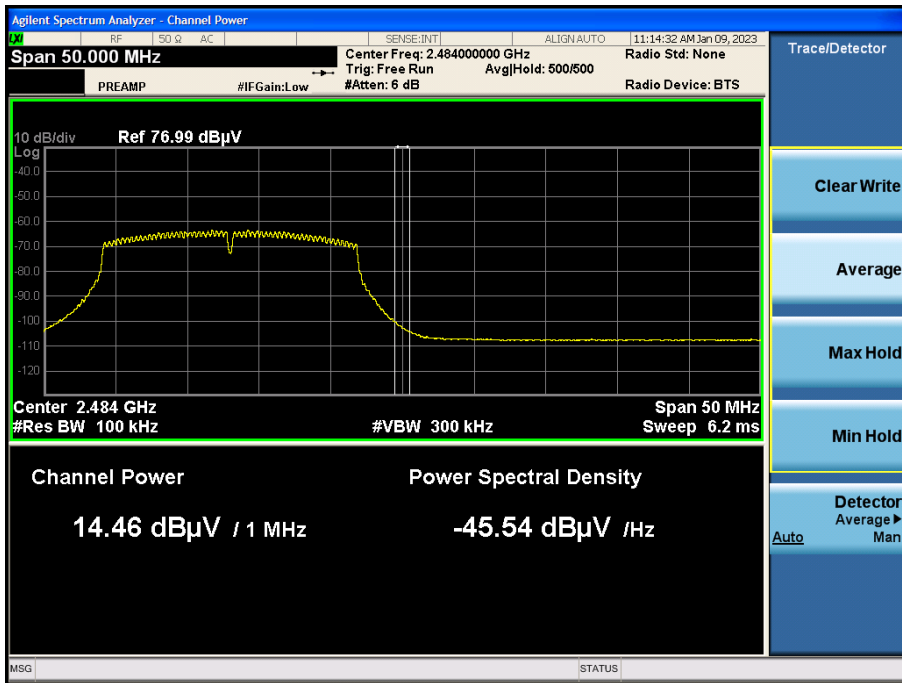

Radiated Restricted Band Edges plot – Peak Result (802.11n (HT20)_MCS0, Ch.13)



Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT : SM-M546B/DS
 Operating Conditions : 2.4G WLAN L1

Full Spectrum

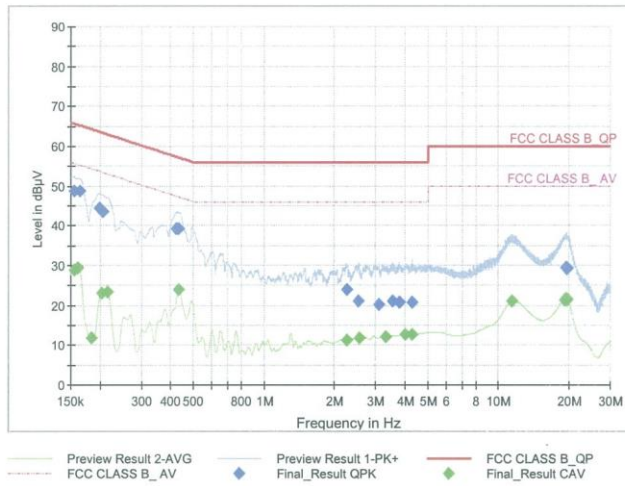

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	48.82	65.75	16.93	9.000	L1	OFF	9.7
0.1635	48.89	65.28	16.40	9.000	L1	OFF	9.7
0.1995	44.41	63.63	19.22	9.000	L1	OFF	9.7
0.2063	43.52	63.36	19.84	9.000	L1	OFF	9.7
0.4245	39.23	57.36	18.13	9.000	L1	OFF	9.7
0.4335	39.13	57.19	18.05	9.000	L1	OFF	9.7
2.2550	24.08	56.00	31.92	9.000	L1	OFF	9.8
2.5318	20.94	56.00	35.06	9.000	L1	OFF	9.8
3.0898	20.23	56.00	35.77	9.000	L1	OFF	9.8
3.5195	20.98	56.00	35.02	9.000	L1	OFF	9.8
3.7940	20.87	56.00	35.13	9.000	L1	OFF	9.8
4.2890	20.64	56.00	35.36	9.000	L1	OFF	9.8
19.2853	29.42	60.00	30.58	9.000	L1	OFF	10.3
19.4360	29.37	60.00	30.63	9.000	L1	OFF	10.3
19.4945	29.40	60.00	30.60	9.000	L1	OFF	10.3
19.5418	29.19	60.00	30.81	9.000	L1	OFF	10.3
19.6318	29.16	60.00	30.84	9.000	L1	OFF	10.3
19.6610	29.09	60.00	30.91	9.000	L1	OFF	10.3

2022-12-03

오후 5:11:31

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	28.87	55.75	26.88	9.000	L1	OFF	9.7
0.1613	29.46	55.40	25.94	9.000	L1	OFF	9.7
0.1838	11.95	54.31	42.37	9.000	L1	OFF	9.7
0.2040	22.96	53.45	30.49	9.000	L1	OFF	9.7
0.2153	23.30	53.00	29.70	9.000	L1	OFF	9.7
0.4335	24.07	47.19	23.11	9.000	L1	OFF	9.7
2.2550	11.32	46.00	34.68	9.000	L1	OFF	9.8
2.2595	11.21	46.00	34.79	9.000	L1	OFF	9.8
2.5520	11.80	46.00	34.20	9.000	L1	OFF	9.8
3.2990	12.16	46.00	33.84	9.000	L1	OFF	9.8
4.0145	12.68	46.00	33.32	9.000	L1	OFF	9.8
4.2890	12.75	46.00	33.25	9.000	L1	OFF	9.8
11.3923	21.06	50.00	28.94	9.000	L1	OFF	10.1
19.1570	21.41	50.00	28.59	9.000	L1	OFF	10.3
19.3640	21.50	50.00	28.50	9.000	L1	OFF	10.3
19.4338	21.56	50.00	28.44	9.000	L1	OFF	10.3
19.4630	21.54	50.00	28.46	9.000	L1	OFF	10.3
19.6228	21.34	50.00	28.66	9.000	L1	OFF	10.3

2022-12-03

오후 5:11:31

Conducted Emissions (Line 2)

Test


1 / 2

Test Report

Common Information

EUT : SM-M546B/DS
 Operating Conditions : 2.4G WLAN N

Full Spectrum

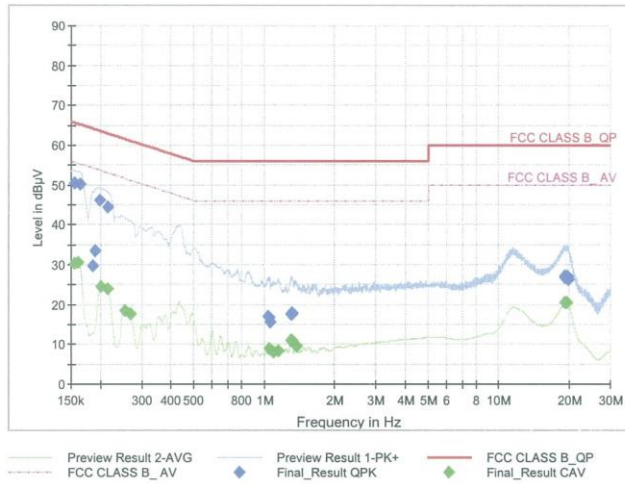

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	50.37	65.75	15.38	9.000	N	OFF	9.6
0.1635	50.28	65.28	15.00	9.000	N	OFF	9.6
0.1860	29.70	64.21	34.51	9.000	N	OFF	9.6
0.1905	33.36	64.02	30.65	9.000	N	OFF	9.6
0.1995	46.09	63.63	17.54	9.000	N	OFF	9.6
0.2153	44.54	63.00	18.46	9.000	N	OFF	9.6
1.0423	17.16	56.00	38.84	9.000	N	OFF	9.7
1.0490	16.64	56.00	39.36	9.000	N	OFF	9.7
1.0580	15.71	56.00	40.29	9.000	N	OFF	9.7
1.2988	17.70	56.00	38.30	9.000	N	OFF	9.7
1.3123	17.82	56.00	38.18	9.000	N	OFF	9.7
1.3190	17.47	56.00	38.53	9.000	N	OFF	9.7
19.1188	26.81	60.00	33.19	9.000	N	OFF	10.4
19.1930	27.02	60.00	32.98	9.000	N	OFF	10.4
19.4405	26.93	60.00	33.07	9.000	N	OFF	10.5
19.4878	26.99	60.00	33.01	9.000	N	OFF	10.5
19.5148	26.93	60.00	33.07	9.000	N	OFF	10.5
19.7510	26.36	60.00	33.64	9.000	N	OFF	10.5

2022-12-03

오후 5:02:56

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	30.39	55.75	25.37	9.000	N	OFF	9.6
0.1613	30.46	55.40	24.94	9.000	N	OFF	9.6
0.2018	24.60	53.54	28.94	9.000	N	OFF	9.6
0.2153	23.99	53.00	29.01	9.000	N	OFF	9.6
0.2535	18.36	51.64	33.28	9.000	N	OFF	9.6
0.2693	17.72	51.14	33.42	9.000	N	OFF	9.6
1.0445	8.88	46.00	37.12	9.000	N	OFF	9.7
1.0985	7.97	46.00	38.03	9.000	N	OFF	9.7
1.1480	8.36	46.00	37.64	9.000	N	OFF	9.7
1.3055	10.95	46.00	35.05	9.000	N	OFF	9.7
1.3100	10.88	46.00	35.12	9.000	N	OFF	9.7
1.3730	9.48	46.00	36.52	9.000	N	OFF	9.7
19.1930	20.43	50.00	29.57	9.000	N	OFF	10.4
19.2133	20.52	50.00	29.48	9.000	N	OFF	10.4
19.3280	20.57	50.00	29.43	9.000	N	OFF	10.5
19.3550	20.56	50.00	29.44	9.000	N	OFF	10.5
19.4203	20.58	50.00	29.42	9.000	N	OFF	10.5
19.6048	20.45	50.00	29.55	9.000	N	OFF	10.5

2022-12-03

오후 5:02:56

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY52350879	01/02/2024	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/14/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Keysight	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	05001	05/18/2023	Annual
DC Power Supply	E3632A	H.P	KR75303243	04/25/2023	Annual
Attenuator(10 dB)	8493C	Hewlett Packard	07560	06/14/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/22/2023	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	03/24/2024	Biennial
Horn Antenna (15GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	102168	07/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY52350879	01/02/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/07/2023	Annual
High Pass Filter	WHK3.0/18G-10EF	Wainwright Instruments	8	01/21/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	25	01/21/2023	Annual
Attenuator (3 dB)	18B-03	Api tech.	1	01/21/2023	Annual
Attenuator(10 dB)	8493C-10	Agilent	08285	01/21/2023	Annual
Power Amplifier	CBLU1183540	CERNEX	22964	01/21/2023	Annual
Power Amplifier	CBL06185030	CERNEX	22965	01/21/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2301-FC025-P