



MEASUREMENT REPORT
FCC Part 15.247 WLAN 802.11a/b/g/n/ac

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:
7/28 - 10/2/2014, 11/24 -12/24/2014
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1411242157.A3L

FCC ID:	A3LSMN916KOR
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model(s): SM-N916S, SM-N916K, SM-N916L
EUT Type: Portable Handset
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Procedure(s): KDB 558074 v03r02, KDB 662911 v02r01

Mode	Tx Frequency (MHz)	ANT1				ANT2				MIMO			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2462	51.404	17.11	93.972	19.73	43.853	16.42	80.910	19.08	N/A			
802.11g	2412 - 2462	19.320	12.86	116.681	20.67	21.577	13.34	110.662	20.44	N/A			
802.11n	2412 - 2462	15.524	11.91	93.541	19.71	17.179	12.35	82.035	19.14	29.352	14.68	110.967	20.45
802.11a	5745 - 5825	11.194	10.49	71.614	18.55	10.069	10.03	53.580	17.29	N/A			
802.11n (20MHz)	5745 - 5825	11.194	10.49	64.863	18.12	10.069	10.03	50.350	17.02	18.874	12.76	72.303	18.59
802.11n (40MHz)	5755 - 5795	8.872	9.48	48.978	16.90	8.492	9.29	40.738	16.10	17.164	12.35	63.973	18.06
802.11ac (80MHz)	5775	6.577	8.18	27.290	14.36	6.039	7.81	25.177	14.01	12.053	10.81	41.826	16.21

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 v03r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President







FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 1 of 121	

TABLE OF CONTENTS


FCC PART 15.247 MEASUREMENT REPORT		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES		5
2.3 TEST CONFIGURATION		6
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		6
3.0 DESCRIPTION OF TEST		7
3.1 EVALUATION PROCEDURE.....		7
3.2 AC LINE CONDUCTED EMISSIONS.....		7
3.3 RADIATED EMISSIONS		8
3.4 ENVIRONMENTAL CONDITIONS		8
4.0 ANTENNA REQUIREMENTS		9
5.0 TEST EQUIPMENT CALIBRATION DATA.....		10
6.0 TEST RESULTS		11
6.1 SUMMARY		11
6.2 6DB BANDWIDTH MEASUREMENT		12
6.3 OUTPUT POWER MEASUREMENT		33
6.4 POWER SPECTRAL DENSITY		42
6.5 CONDUCTED EMISSIONS AT THE BAND EDGE.....		64
6.6 CONDUCTED SPURIOUS EMISSIONS.....		79
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS – ABOVE 1 GHZ		93
6.8 ANTENNA-1 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....		105
6.9 ANTENNA-2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....		109
6.10 MIMO RADIATED RESTRICTED BAND EDGE MEASUREMENTS		113
6.11 LINE-CONDUCTED TEST DATA.....		117
7.0 CONCLUSION		121

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset		Page 2 of 121



MEASUREMENT REPORT

FCC Part 15.247



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.247

BASE MODEL: SM-N916S

FCC ID: A3LSMN916KOR

FCC CLASSIFICATION: Digital Transmission System (DTS)


Test Device Serial No.: 40BA6, F1920, Production Pre-Production Engineering
F1922, 34 V2, N4921KEa4P

DATE(S) OF TEST: 7/28 - 10/2/2014, 11/24 -12/24/2014



TEST REPORT S/N: 0Y1411242157.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSMN916KOR	 FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 3 of 121

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

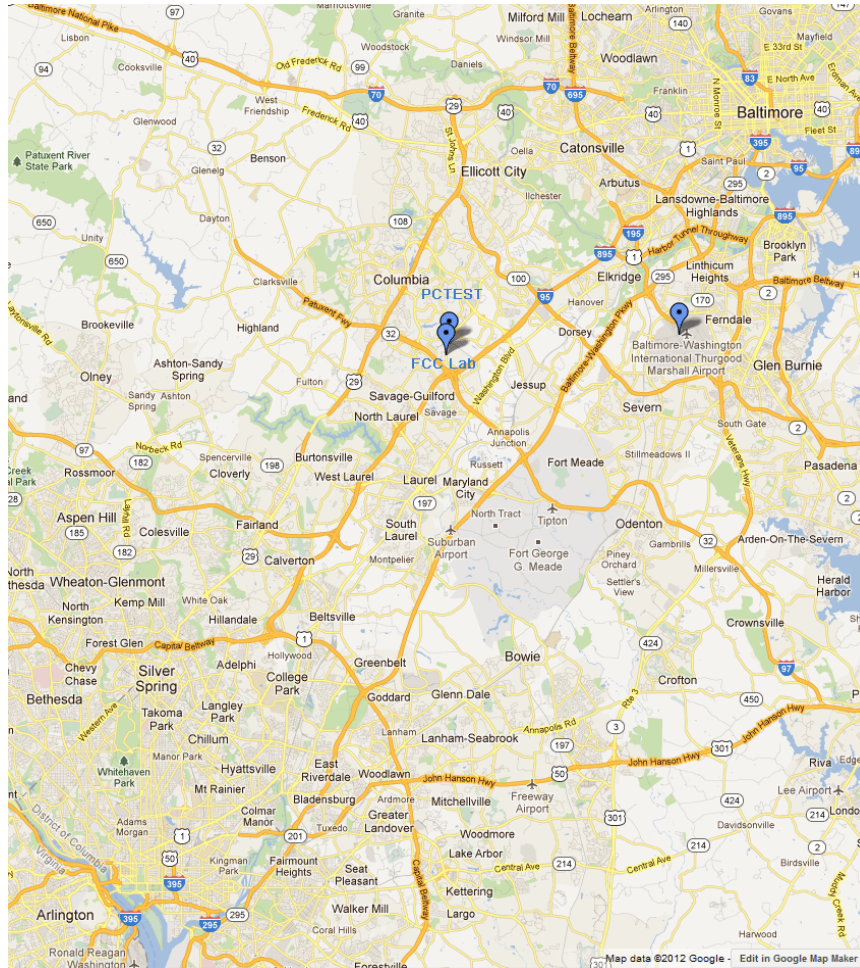


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 4 of 121

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN916KOR**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

1900 GSM/GPRS, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11a/b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Note: The circuitry for this device is electrically identical to a device bearing the FCC ID: A3LSMN910S. Thus, the data found within this report, excluding line conducted, conducted powers, radiated spurious emissions, and emissions at the band edge, was taken from the A3LSMN910S.

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 v03r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
2.4GHz	b	99.50	99.50	N/A
	g	98.90	99.04	N/A
	n	99.16	98.68	98.68
5GHz	a	99.05	99.34	N/A
	n (HT20)	98.46	99.29	98.75
	n (HT40)	97.72	96.93	95.74
	ac (HT80)	88.50	92.01	91.28

The device employs MIMO technology. Below are the possible configurations.



WiFi Configurations		SISO		SDM	
		ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✗	✗
	11g	✓	✓	✗	✗
	11n	✓	✓	✓	✓
5GHz	11a	✓	✓	✗	✗
	11n (20MHz)	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓

Table 2-1. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 5 of 121	



Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n – 20MHz)
13.5/15Mbps, 27/30Mbps, 40.5/45Mbps, 54/60Mbps, 81/90Mbps, 108/120Mbps,
121.5/135Mbps, 135/150Mbps (n – 40MHz)
29.3/32.5Mbps, 58.5/65Mbps, 87.8/97.5Mbps, 117/130Mbps, 175.5/195Mbps,
234/260Mbps, 263.3/292.5Mbps, 292.5/325Mbps, 351/390Mbps, 390/433.3Mbps
(ac – 80MHz BW)

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSMN916KOR was tested per the guidance of KDB 558074 v03r02. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.3, 6.4, 6.5, and 6.6 for antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset		Page 6 of 121

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 v03r02 were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSMN916KOR**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.11. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement of ACLC emissions were made with EMI Receiver mode of the Agilent MXE.

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset		Page 7 of 121

3.3 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. For the EUT positioning, "X" is defined with the EUT lying flat on the test surface, "Y" is defined with the EUT standing up on its side, and "Z" is defined with the EUT standing upright.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 8 of 121	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:



The **Samsung Portable Handset FCC ID: A3LSMN916KOR** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Ch.	BW (MHz)	Frequency (MHz)
149	20	5745
151	20 / 40	5755
153	20	5765
155	20 / 80	5775
157	20	5785

Ch.	BW (MHz)	Frequency (MHz)
159	20 / 40	5795
161	20	5805
163	20	5815
165	20	5825

Table 4-1. Frequency/ Channel Operations

FCC ID: A3LSMN916KOR	 FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 9 of 121

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	5/29/2014	Annual	5/29/2015	N/A
-	WL25-1	Conducted Cable Set (25GHz)	1/29/2014	Annual	1/29/2015	N/A
Agilent	8447D	Broadband Amplifier	6/2/2014	Annual	6/2/2015	1937A03348
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/16/2014	Annual	4/16/2015	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Anritsu	ML2495A	Power Meter	10/31/2013	Annual	10/31/2014	941001
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Annual	4/8/2015	846215
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Biennial	6/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Emco	3816/2	Line Impedance Stabilization Network	2/12/2013	Biennial	2/12/2015	9709-1077
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	1/30/2014	Annual	1/30/2015	251425001
K & L	11SH10-6000/T18000	High Pass Filter	2/7/2014	Annual	2/7/2015	1
K & L	11SH10-3075/U18000	High Pass Filter	5/2/2014	Annual	5/2/2015	2
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	1/28/2014	Annual	1/28/2015	N/A
Rhode & Schwarz	TS-PR18	Pre-Amplifier	6/12/2014	Annual	6/12/2015	101622
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

Table 5-1. Annual Test Equipment Calibration Schedule (Used for 7/28 – 10/2/2014)

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	5/29/2014	Annual	5/29/2015	N/A
-	WL25-1	Conducted Cable Set (25GHz)	1/29/2014	Annual	1/29/2015	N/A
Agilent	8447D	Broadband Amplifier	6/2/2014	Annual	6/2/2015	1937A03348
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/16/2014	Annual	4/16/2015	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9038A	MXE EMI Receiver	1/3/2014	Annual	1/3/2015	MY51210133
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Biennial	4/8/2016	846215
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Biennial	6/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Emco	3816/2	Line Impedance Stabilization Network	2/12/2013	Biennial	2/12/2015	9709-1077
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	1/30/2014	Annual	1/30/2015	251425001
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
K & L	11SH10-6000/T18000	High Pass Filter	12/1/2014	Annual	12/1/2015	1
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	1/28/2014	Annual	1/28/2015	N/A
Rhode & Schwarz	TS-PR18	Pre-Amplifier	6/12/2014	Annual	6/12/2015	101622
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/15/2014	Annual	5/15/2015	100037
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140420

Table 5-2. Annual Test Equipment Calibration Schedule (Used for 11/24 – 12/24/2014)

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 10 of 121	

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMN916KOR
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
15.247(a)(2)	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.247(b)(3)	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3
15.247(e)	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 0
15.247(d)	Band Edge / Out-of-Band Emissions	Conducted ≥ 30dBc		PASS	Sections 6.5, 6.6
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 0, 6.8, 6.9, 6.10
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.11

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation”, Version 2.8.

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 11 of 121	

6.2 6dB Bandwidth Measurement

§15.247(a.2)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

KDB 558074 v03r02 – Section 8.2 Option 2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-1. Test Instrument & Measurement Setup

Test Notes



None


FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 12 of 121	

Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	8.064	0.500	Pass
2437	6	b	1	8.062	0.500	Pass
2462	11	b	1	8.105	0.500	Pass
2412	1	g	6	15.14	0.500	Pass
2437	6	g	6	15.40	0.500	Pass
2462	11	g	6	15.69	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	15.10	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	15.71	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	15.72	0.500	Pass
5745	149	a	6	14.77	0.500	Pass
5785	157	a	6	15.09	0.500	Pass
5825	165	a	6	14.18	0.500	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	15.12	0.500	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	15.15	0.500	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	15.08	0.500	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	35.11	0.500	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	35.15	0.500	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.10	0.500	Pass

Table 6-2. Conducted Bandwidth Measurements

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 13 of 121	

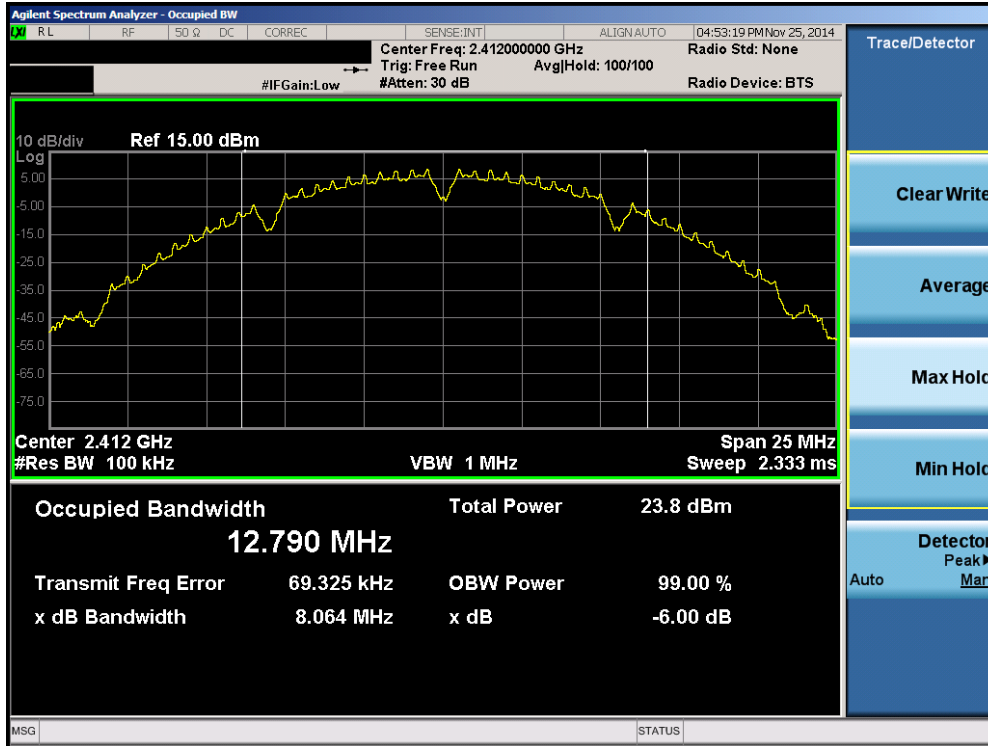


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

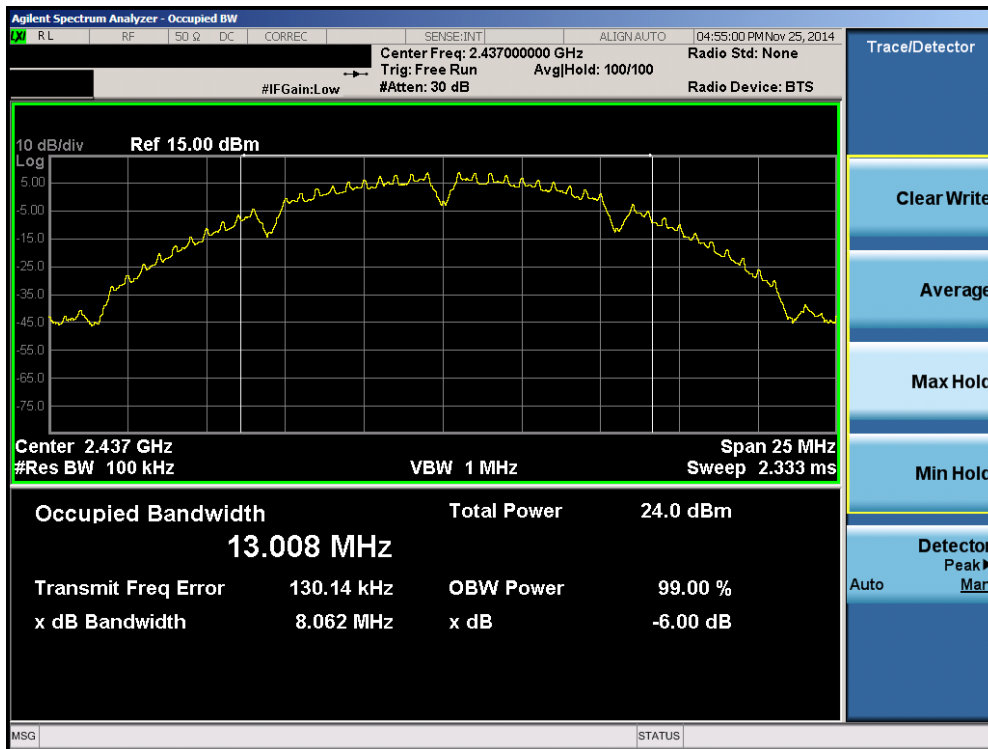


Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 14 of 121

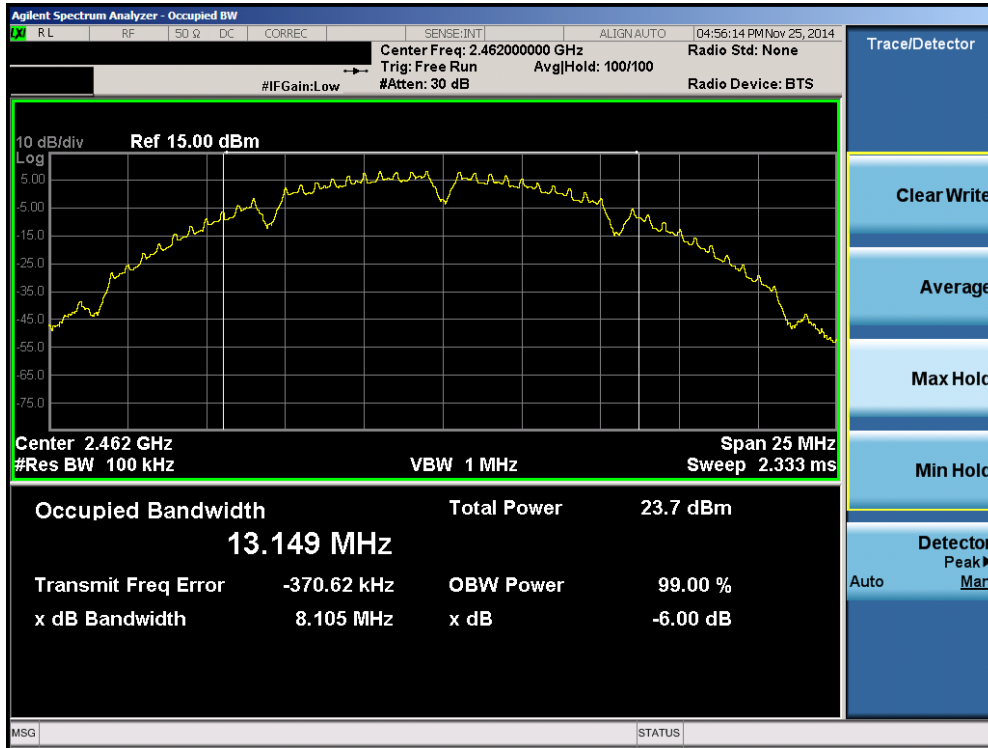


Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

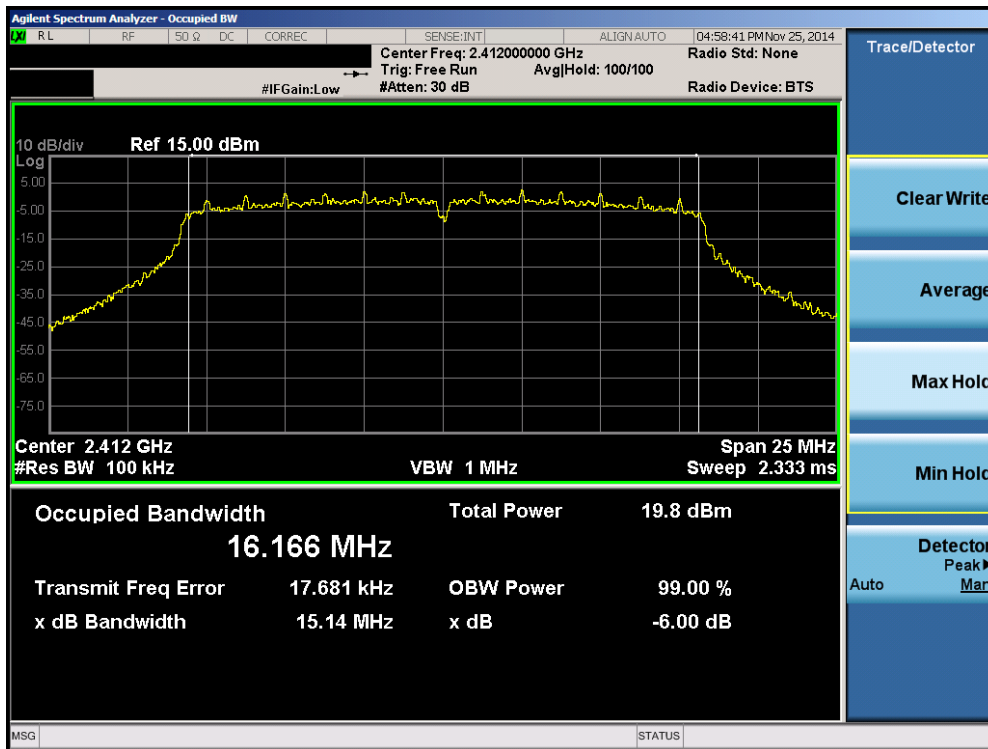


Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 15 of 121

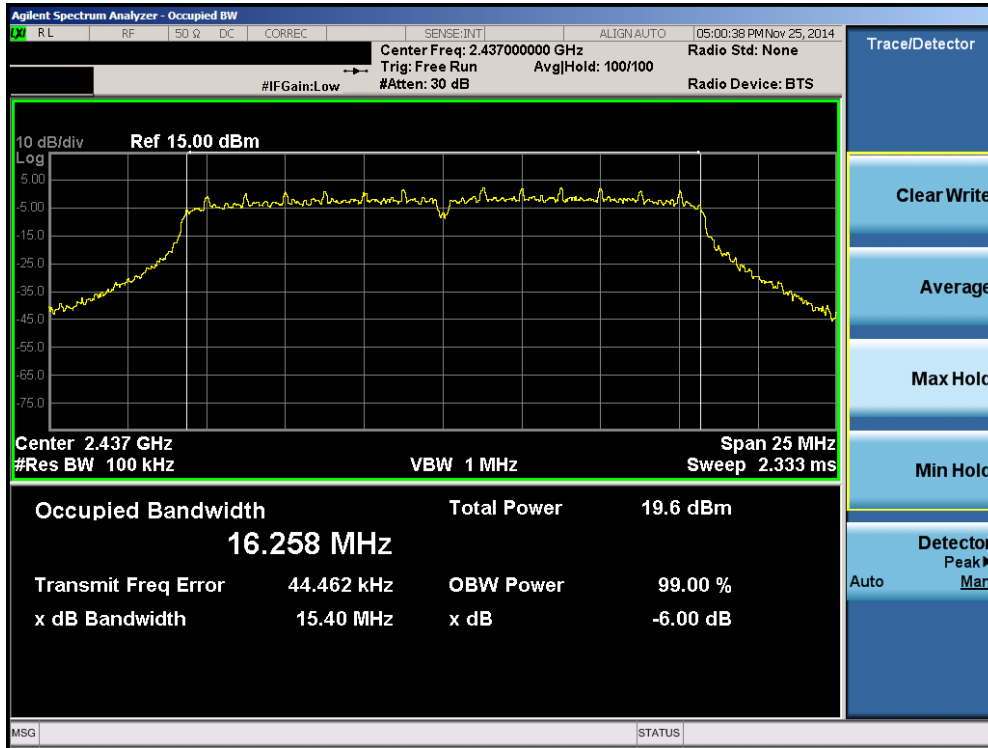


Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

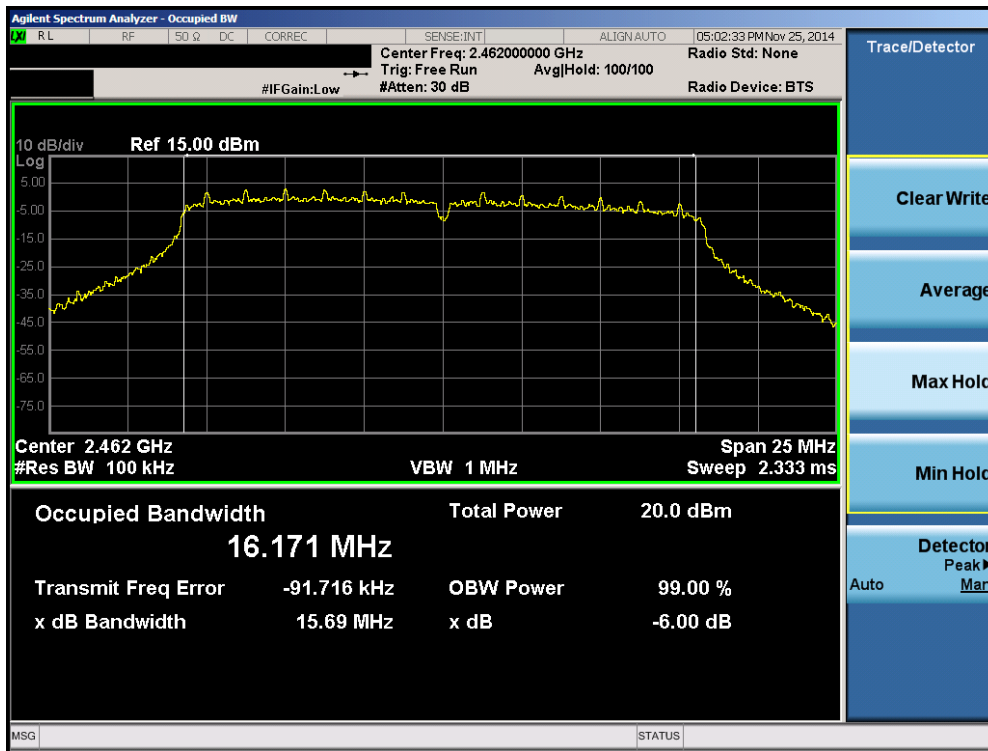


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 16 of 121

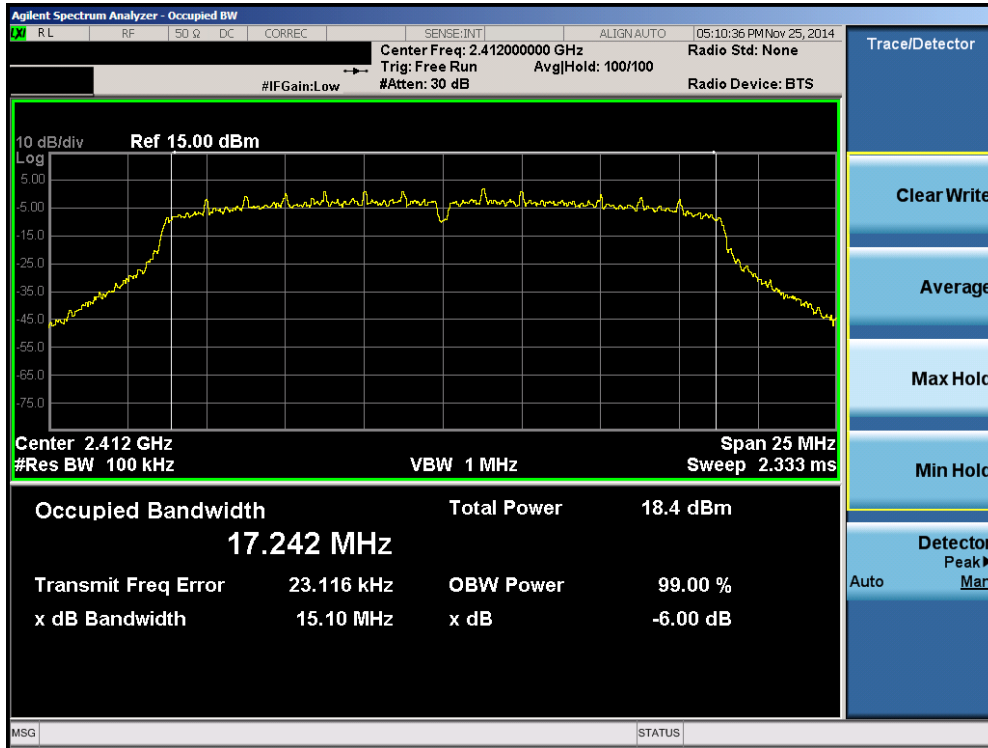


Plot 6-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

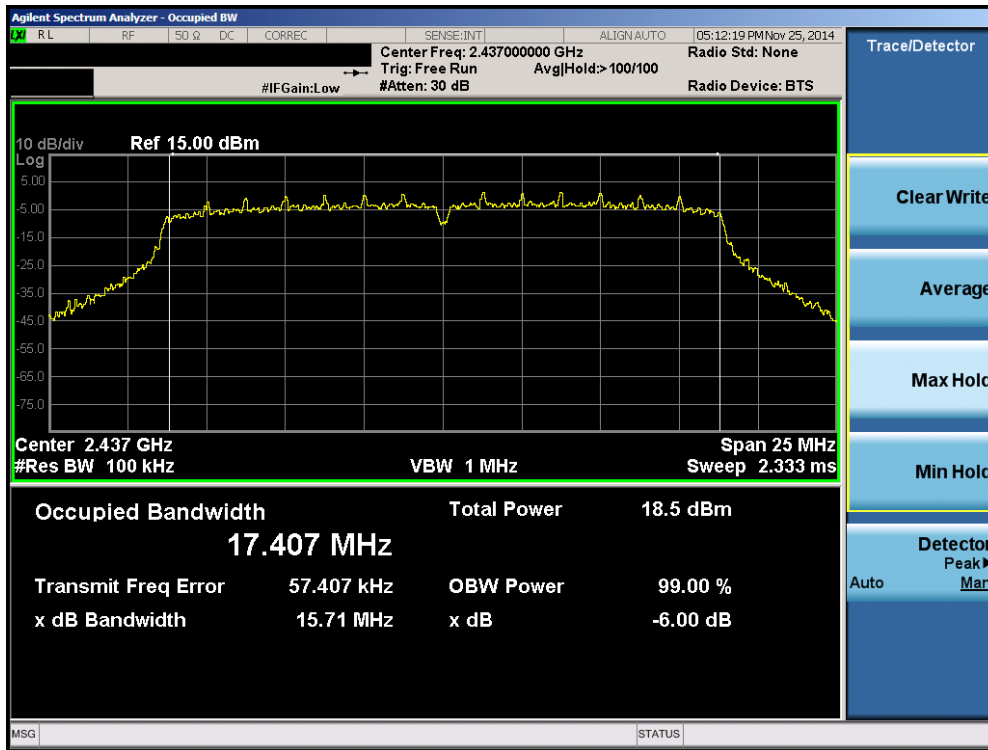


Plot 6-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 17 of 121

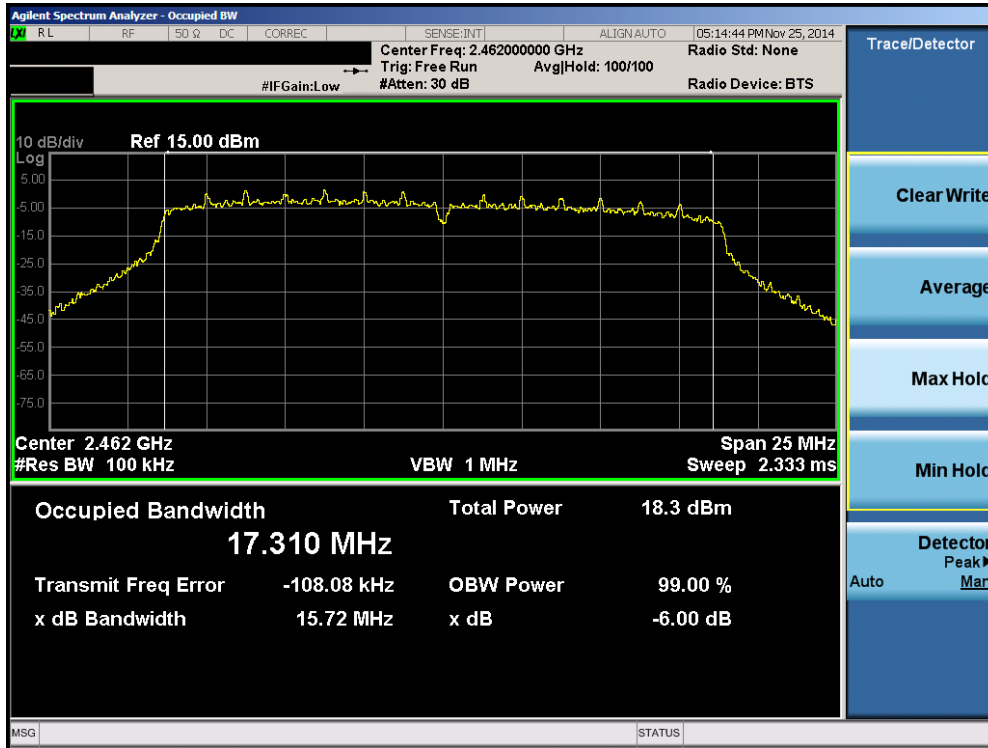


Plot 6-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

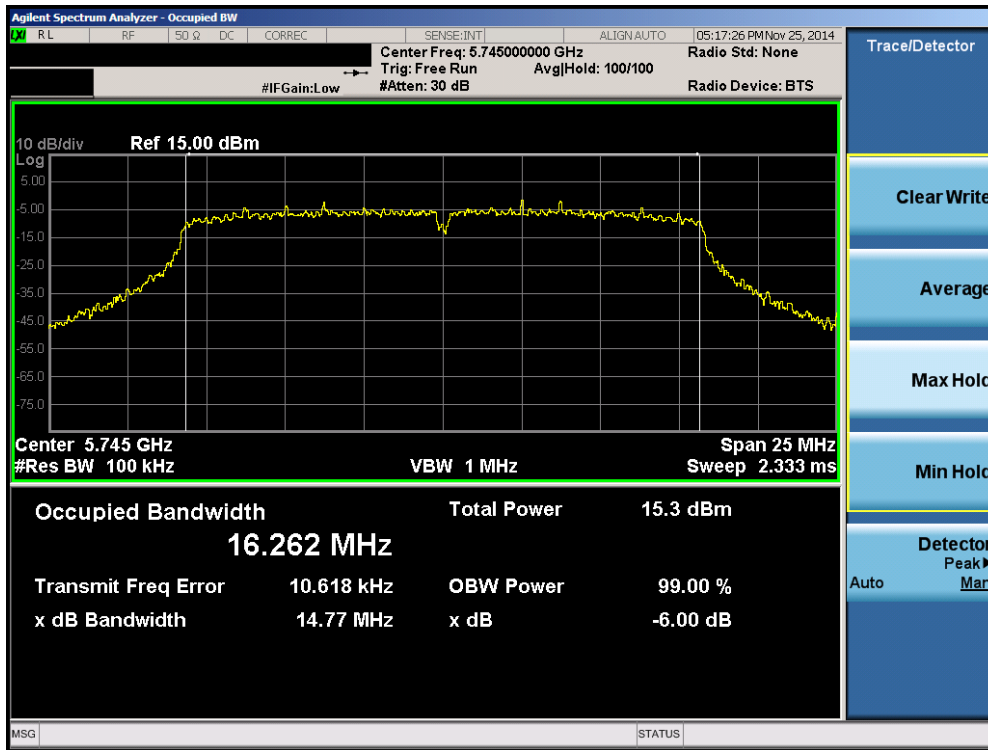


Plot 6-10. 6dB Bandwidth Plot (802.11a – Ch. 149)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 18 of 121

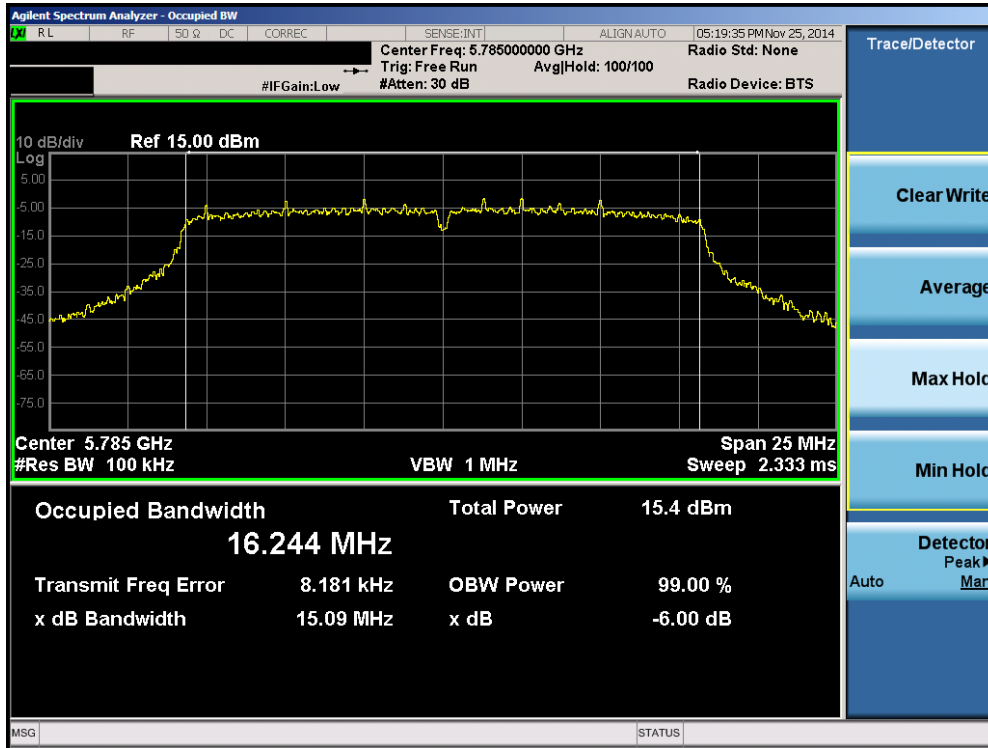


Plot 6-11. 6dB Bandwidth Plot (802.11a – Ch. 157)

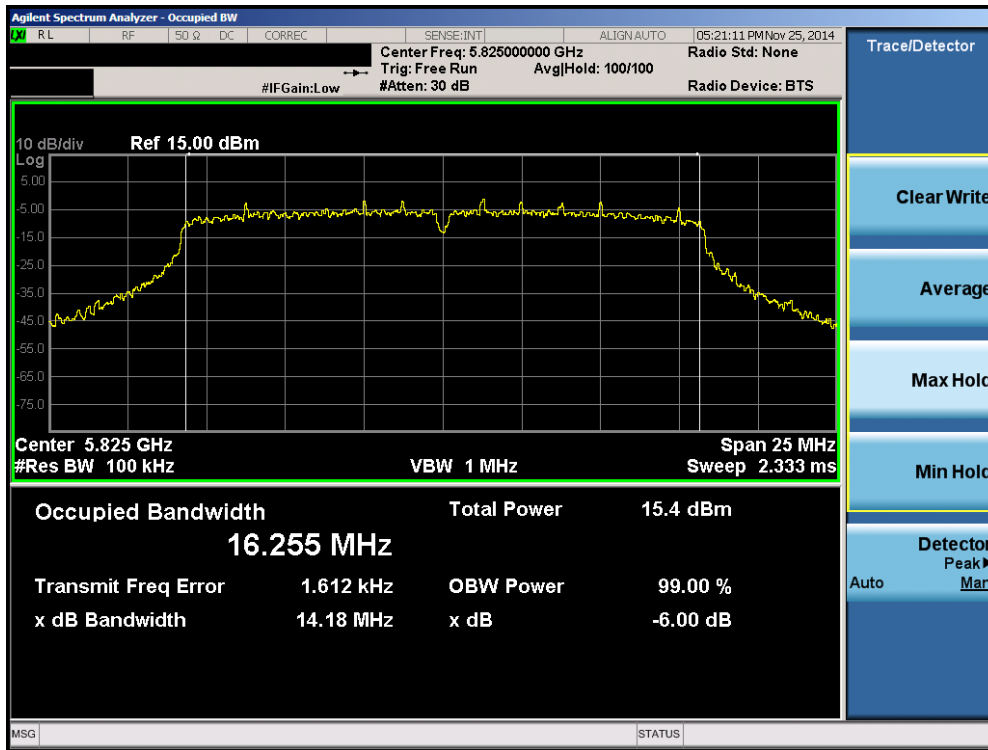


Plot 6-12. 6dB Bandwidth Plot (802.11a – Ch. 165)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 19 of 121

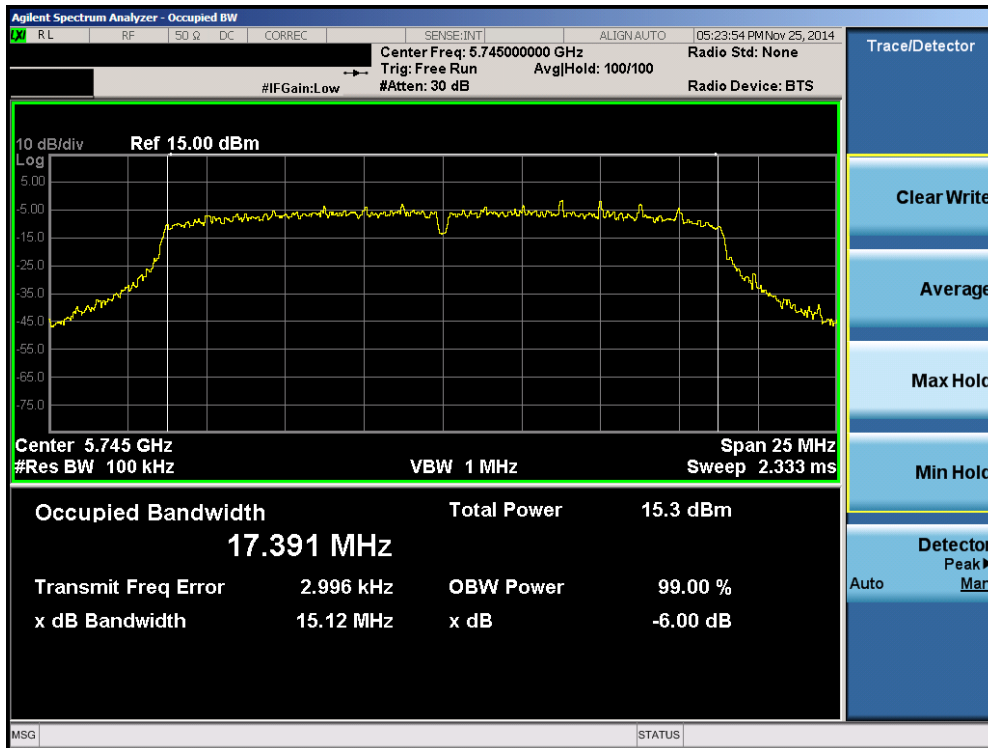


Plot 6-13. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

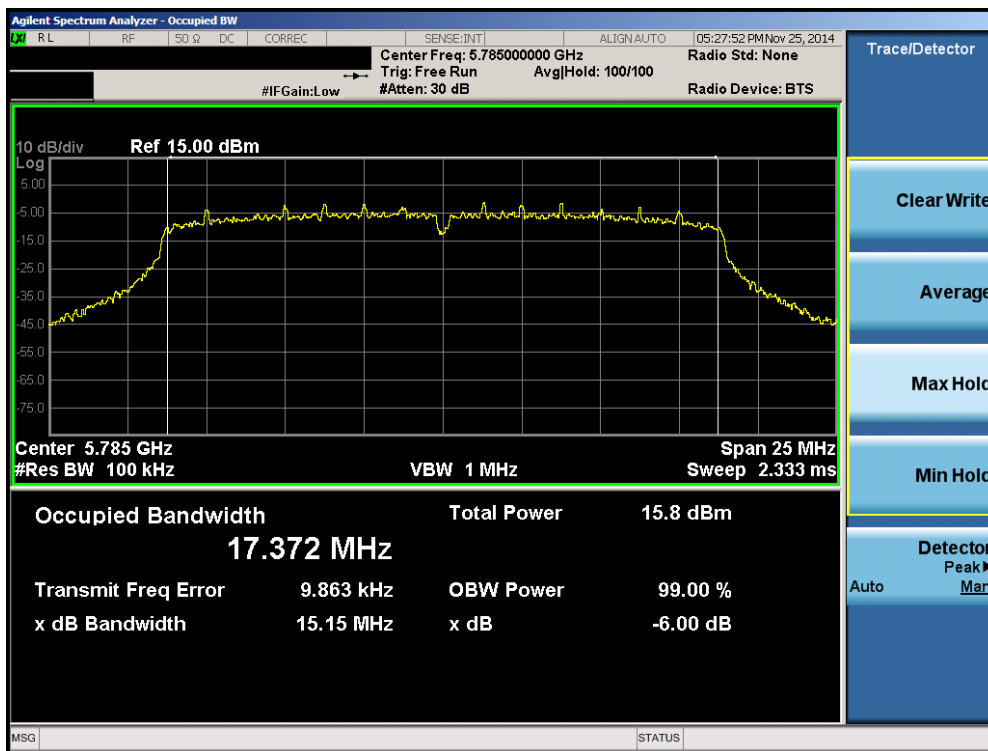


Plot 6-14. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 20 of 121

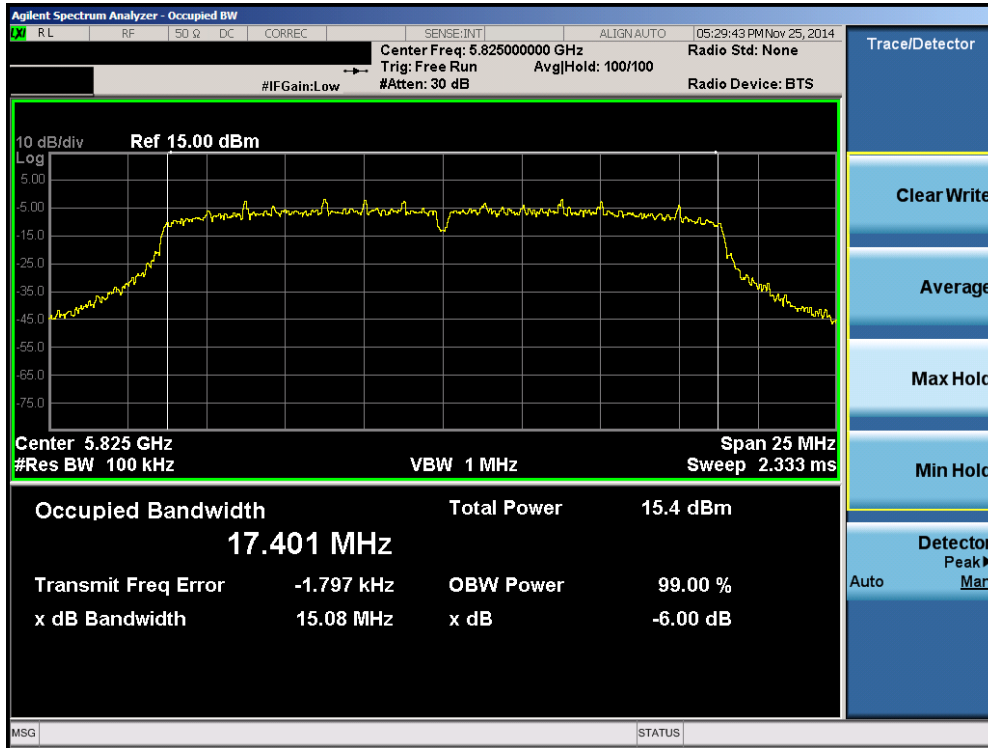


Plot 6-15. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

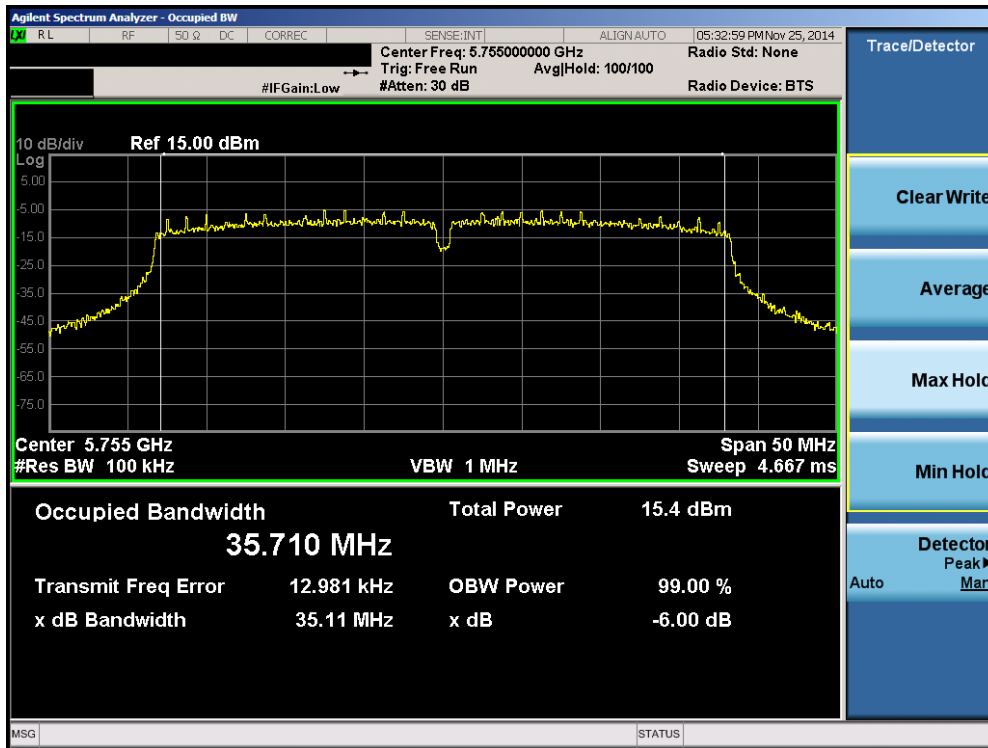


Plot 6-16. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 21 of 121

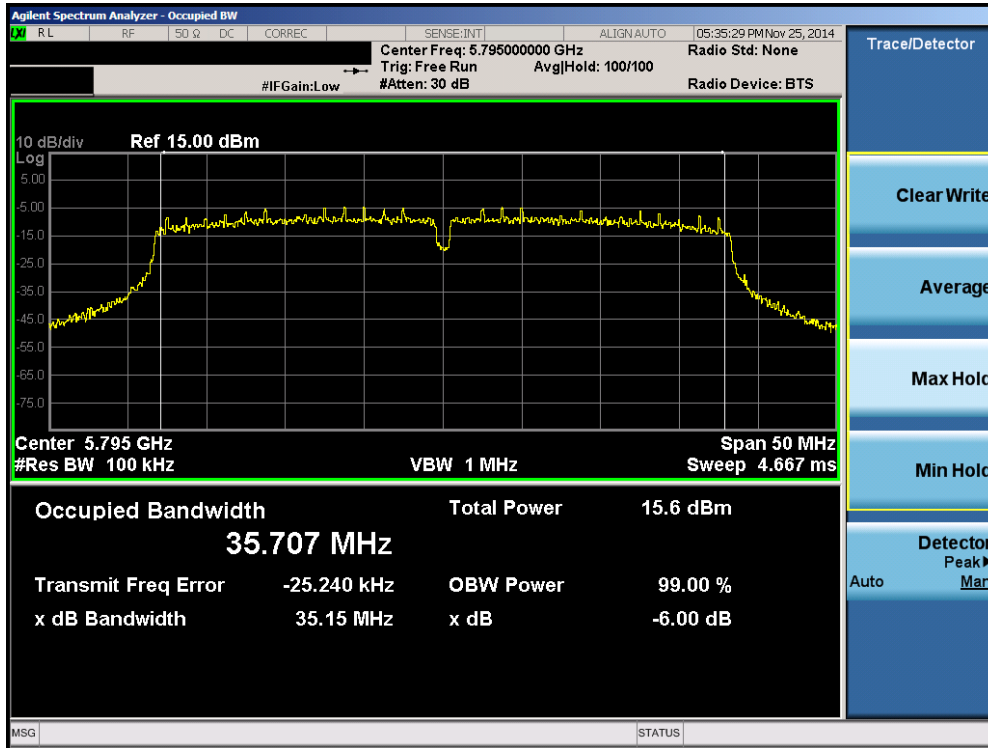

Plot 6-17. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

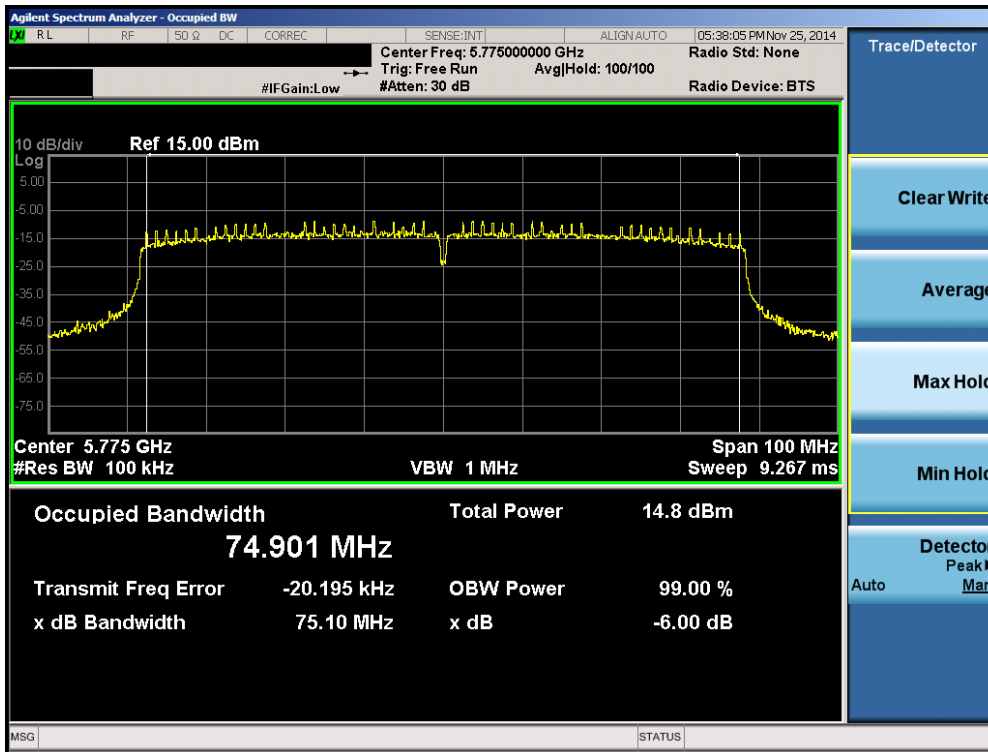



Plot 6-18. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)


FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 22 of 121

Antenna-2 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	8.077	0.500	Pass
2437	6	b	1	7.593	0.500	Pass
2462	11	b	1	8.554	0.500	Pass
2412	1	g	6	15.11	0.500	Pass
2437	6	g	6	15.40	0.500	Pass
2462	11	g	6	12.99	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	15.12	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	15.72	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	15.70	0.500	Pass
5745	149	a	6	14.82	0.500	Pass
5785	157	a	6	15.04	0.500	Pass
5825	165	a	6	15.66	0.500	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	15.14	0.500	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	15.10	0.500	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	15.10	0.500	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	35.04	0.500	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	35.10	0.500	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	73.90	0.500	Pass

Table 6-3. Conducted Bandwidth Measurements

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 23 of 121	

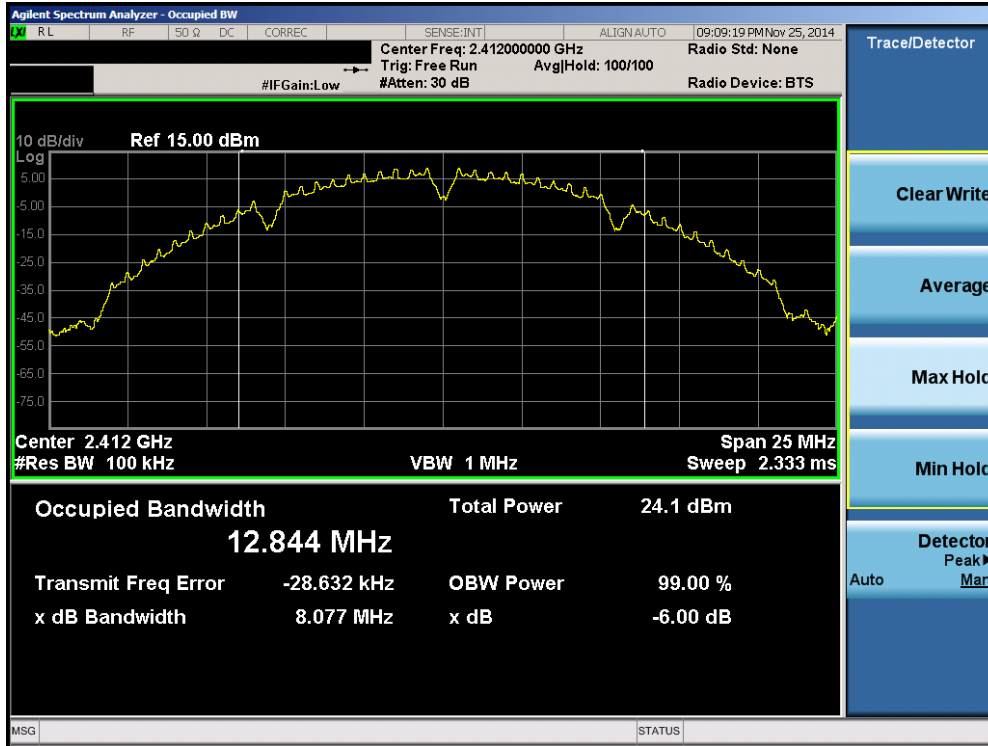


Plot 6-19. 6dB Bandwidth Plot (802.11b – Ch. 1)

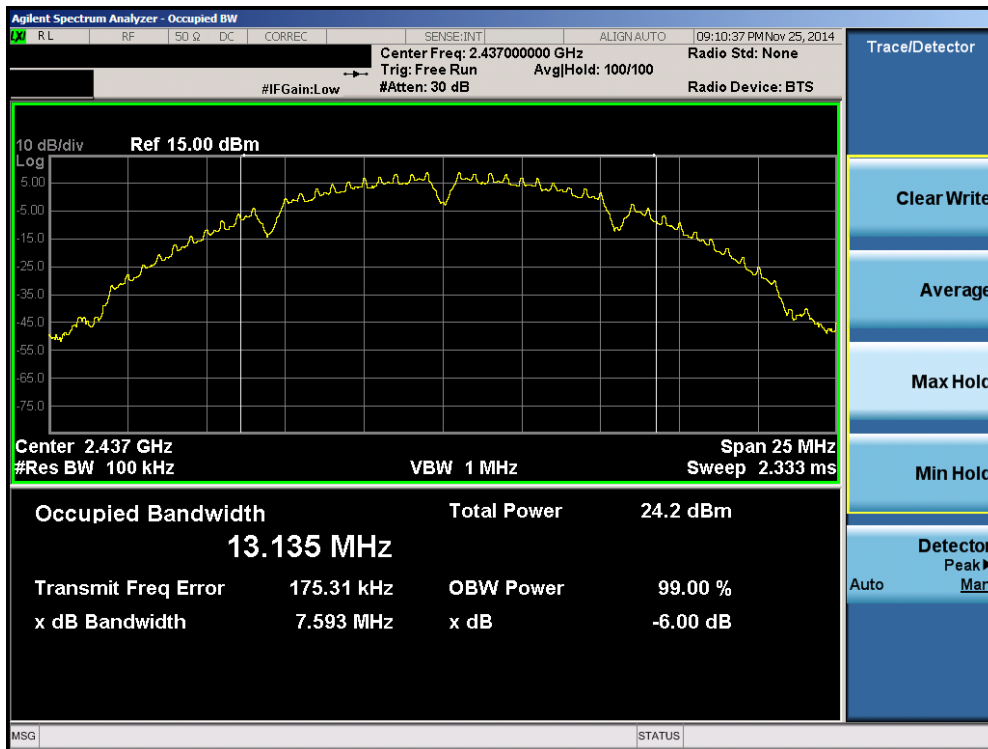


Plot 6-20. 6dB Bandwidth Plot (802.11b – Ch. 6)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 24 of 121

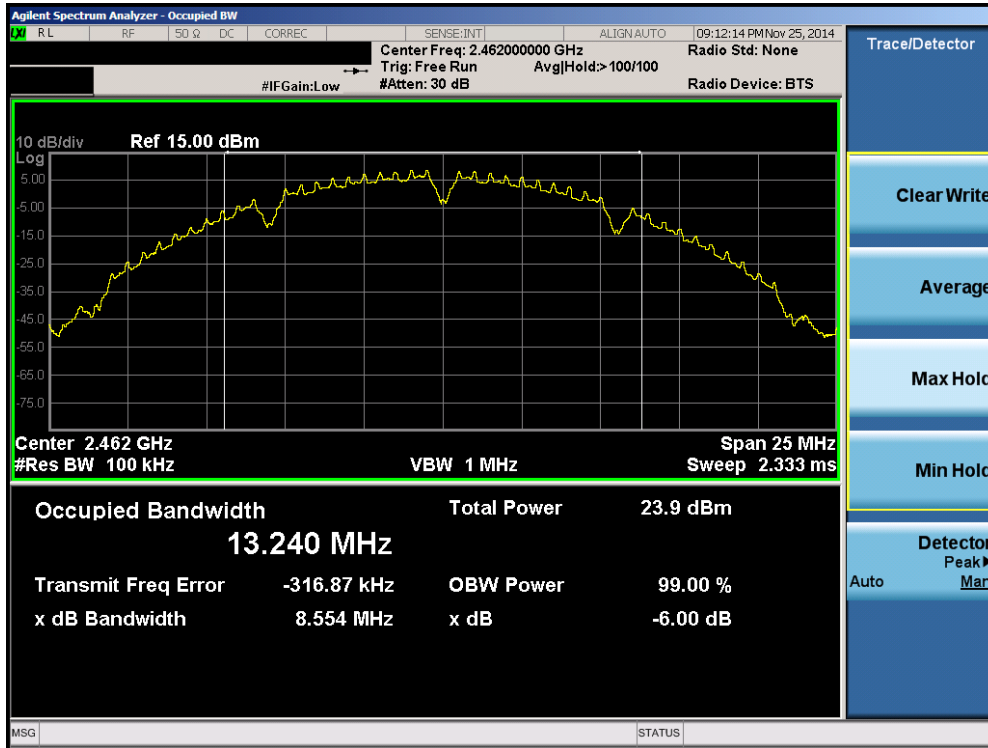


Plot 6-21. 6dB Bandwidth Plot (802.11b – Ch. 11)

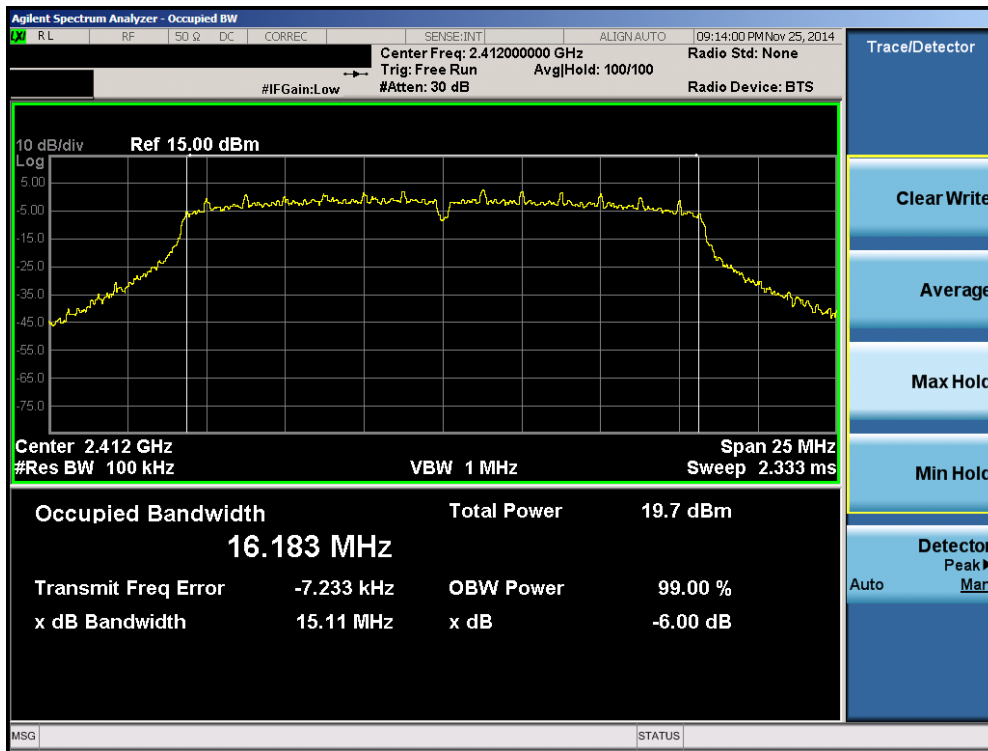


Plot 6-22. 6dB Bandwidth Plot (802.11g – Ch. 1)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 25 of 121

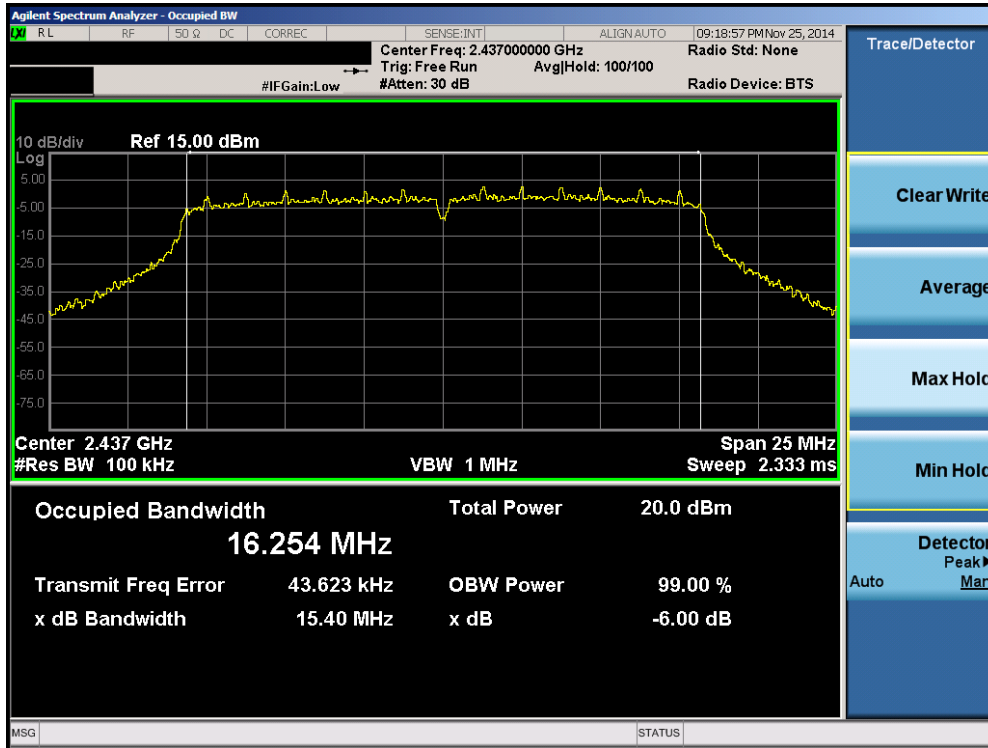


Plot 6-23. 6dB Bandwidth Plot (802.11g – Ch. 6)

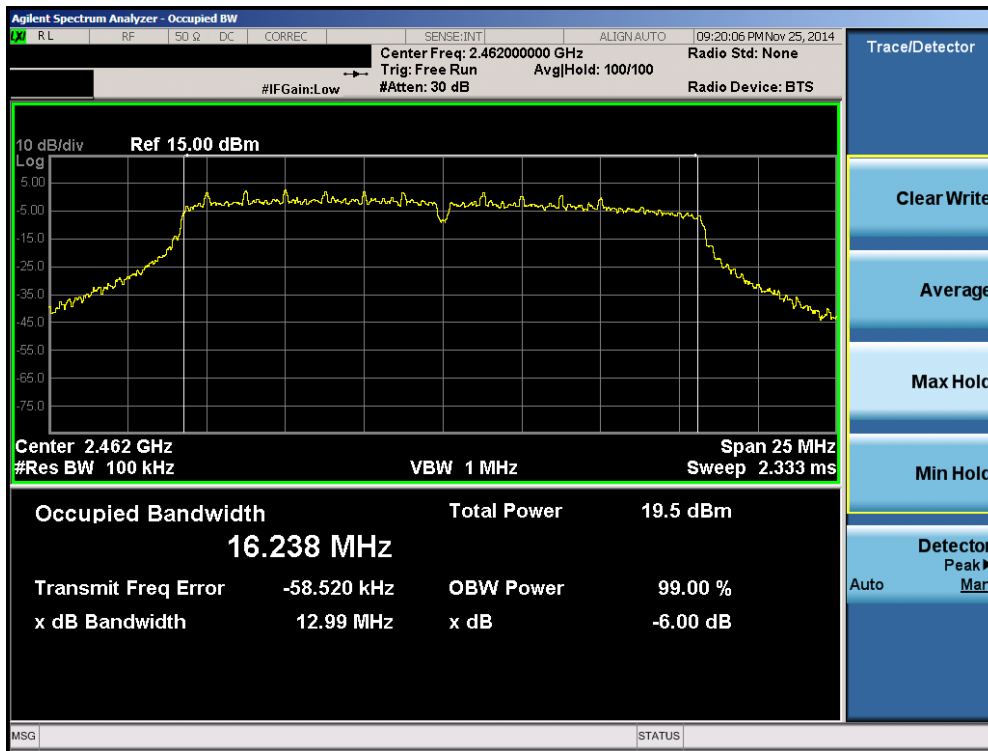


Plot 6-24. 6dB Bandwidth Plot (802.11g – Ch. 11)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 26 of 121

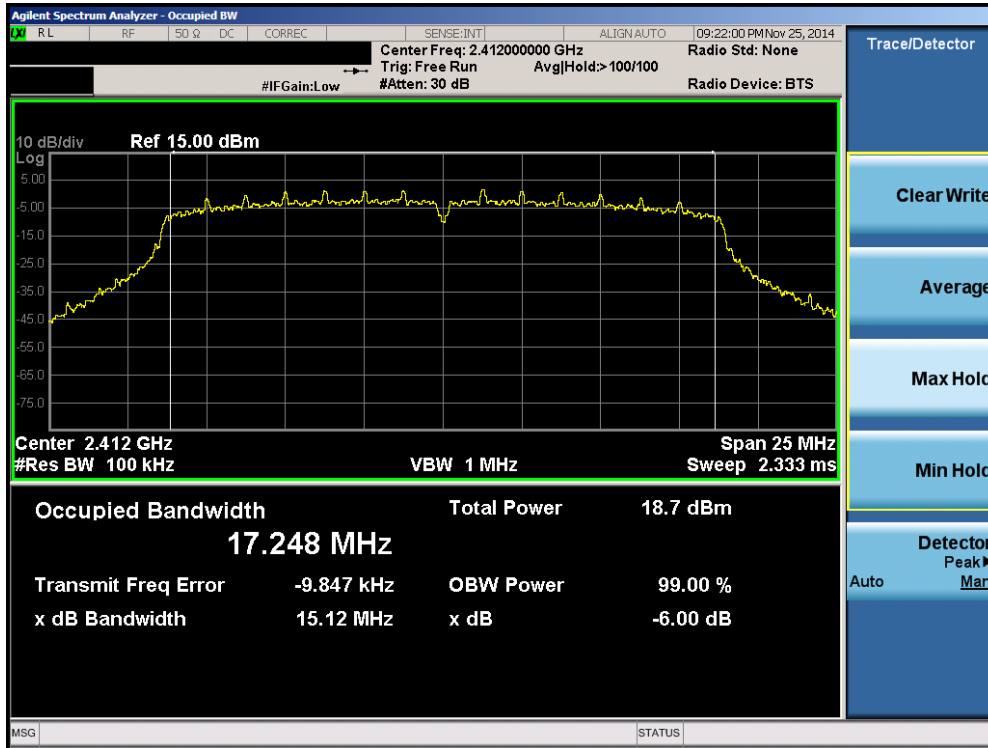


Plot 6-25. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

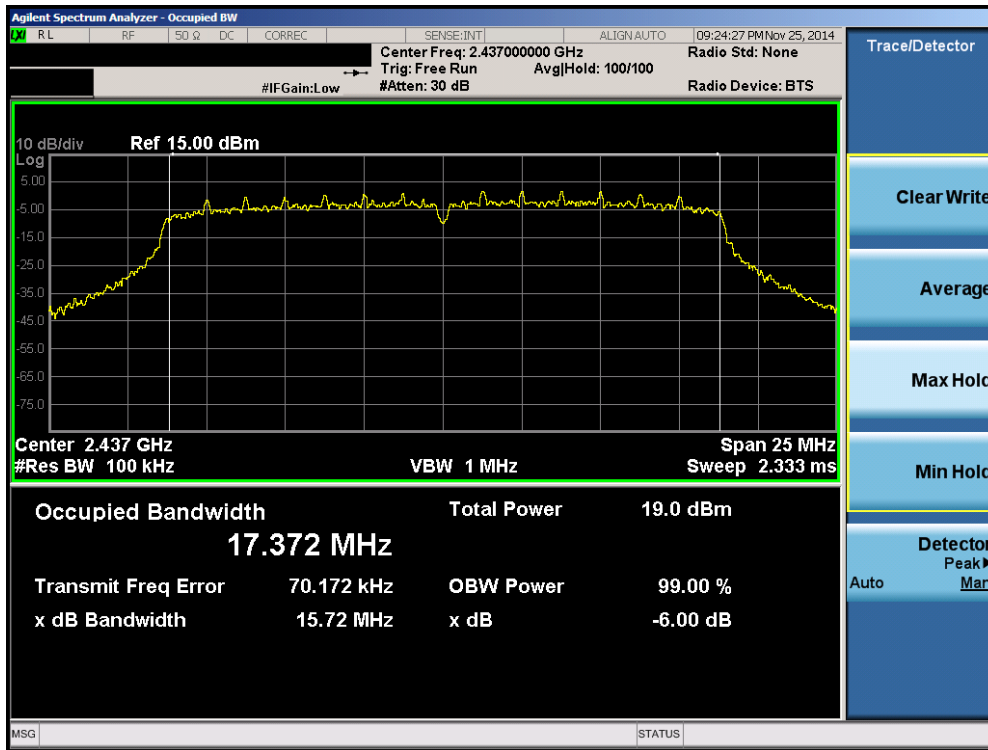


Plot 6-26. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 27 of 121

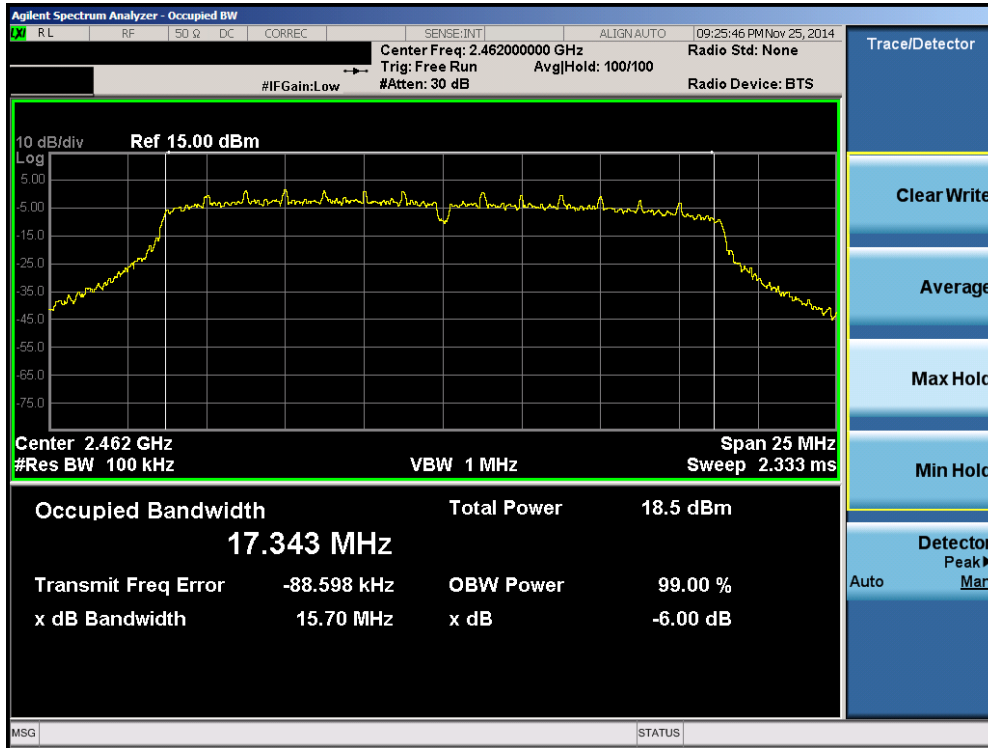


Plot 6-27. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

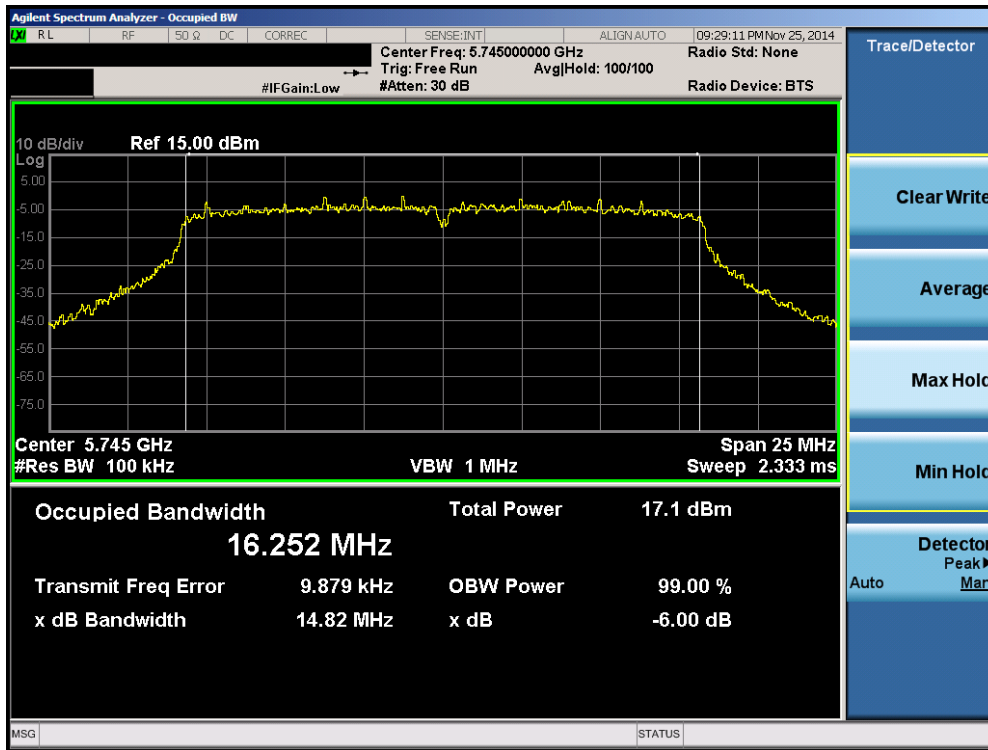


Plot 6-28. 6dB Bandwidth Plot (802.11a – Ch. 149)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 28 of 121

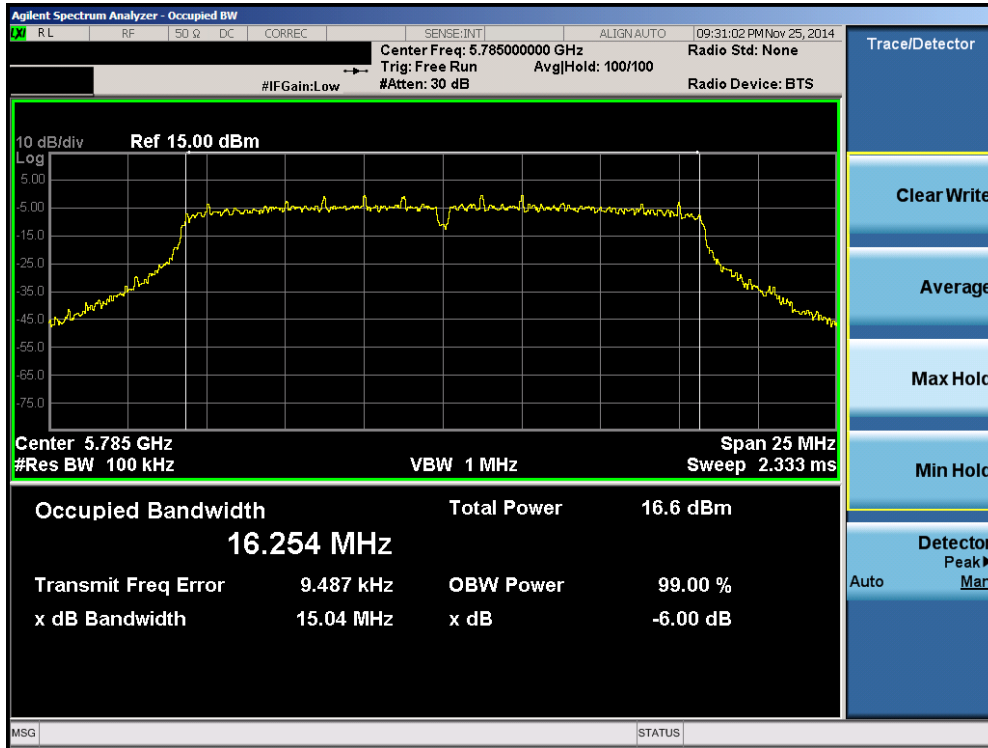


Plot 6-29. 6dB Bandwidth Plot (802.11a – Ch. 157)

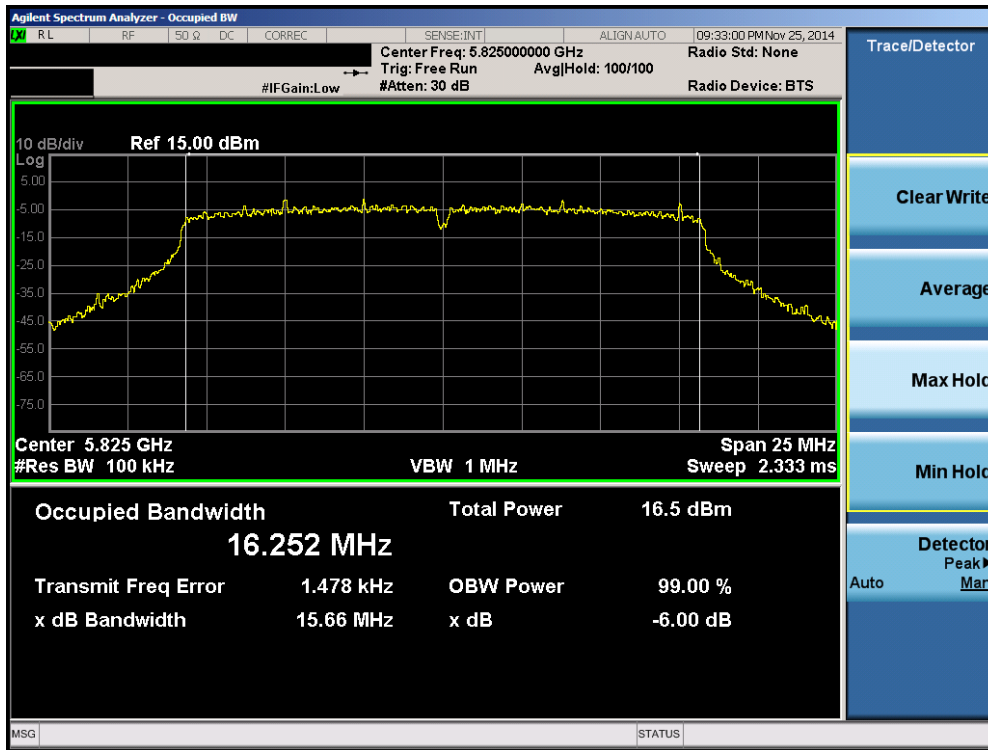


Plot 6-30. 6dB Bandwidth Plot (802.11a – Ch. 165)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 29 of 121

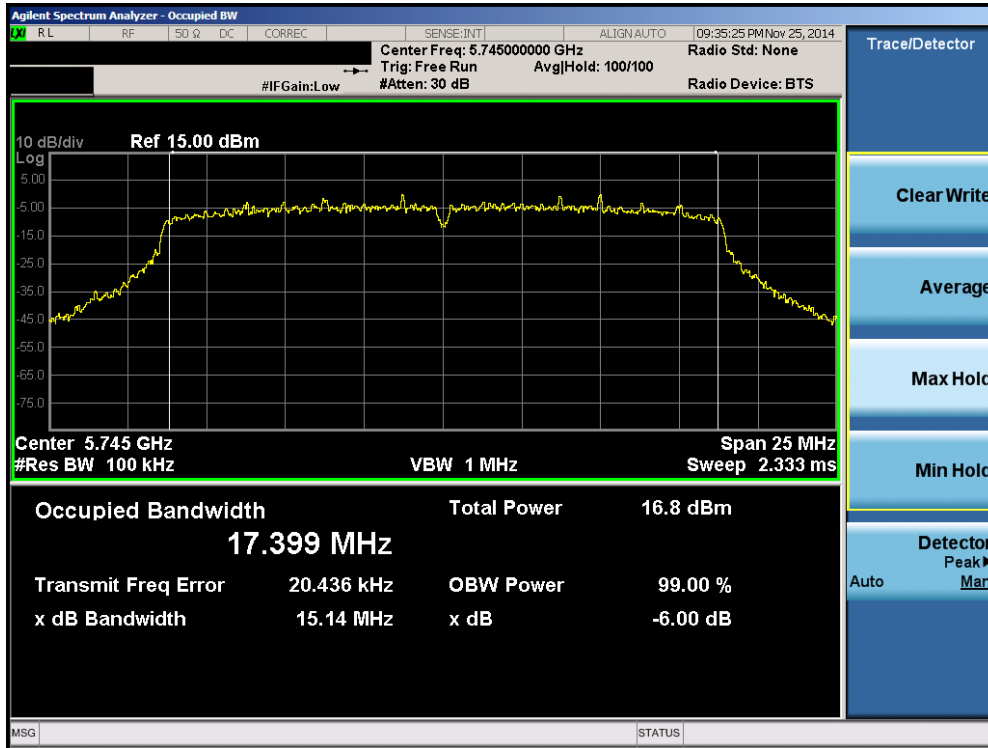


Plot 6-31. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

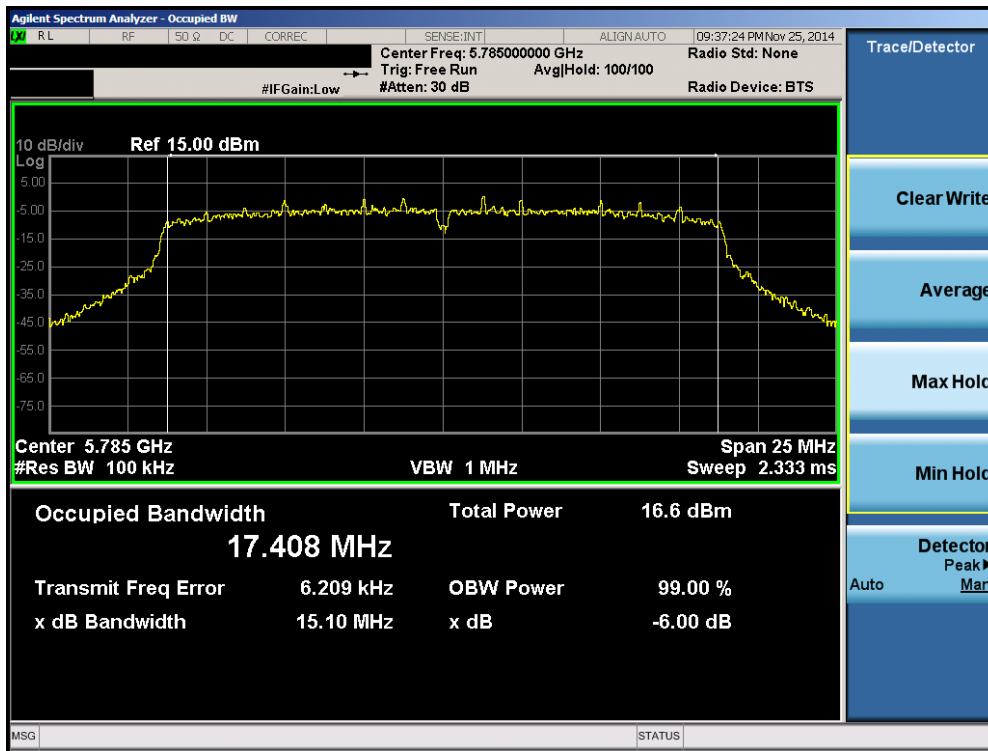


Plot 6-32. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 30 of 121

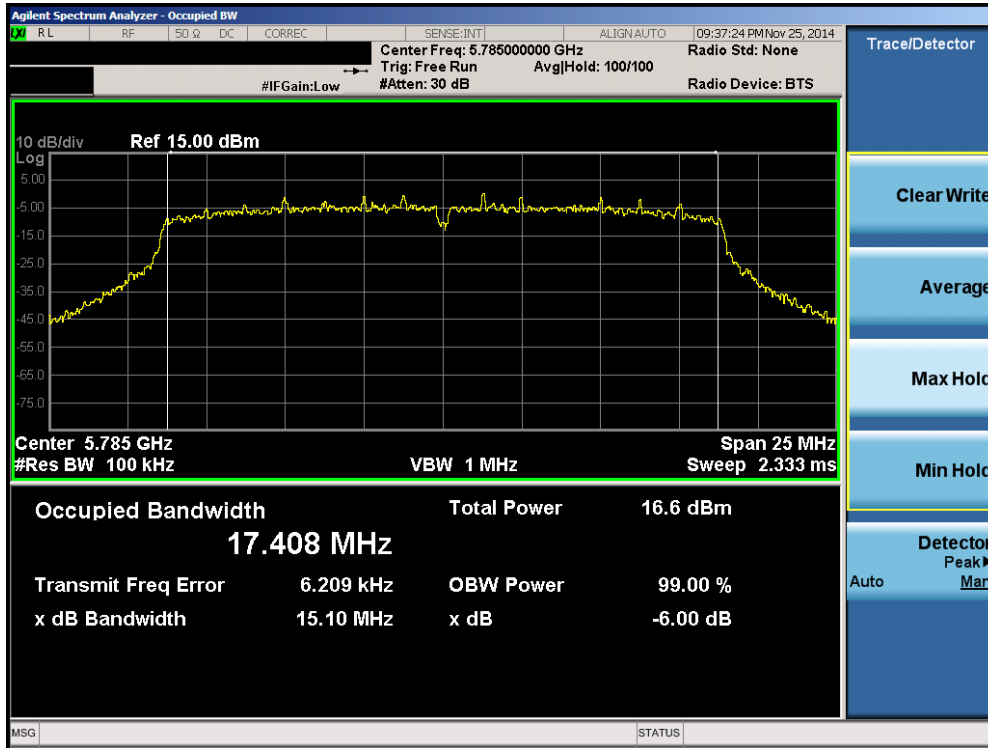


Plot 6-33. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

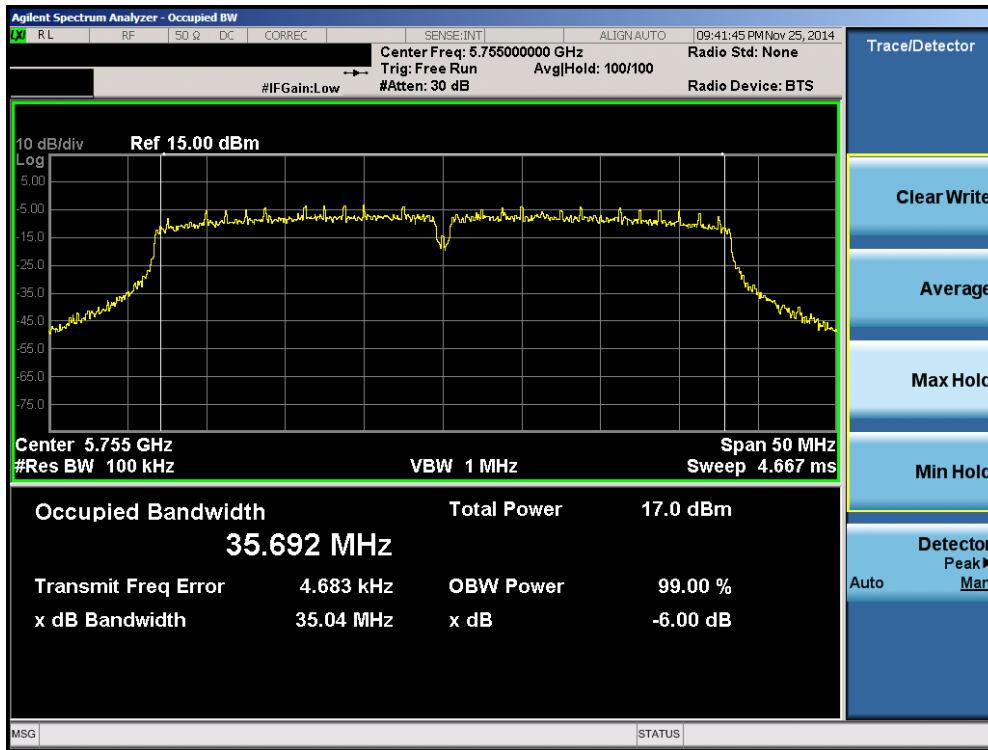


Plot 6-34. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 31 of 121

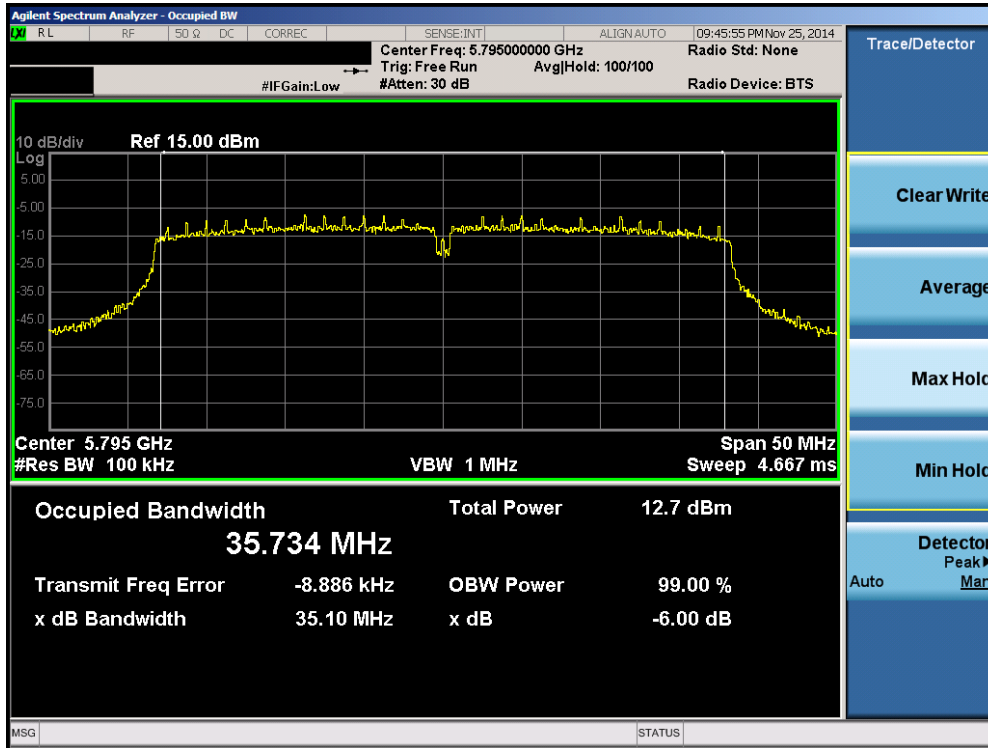

Plot 6-35. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

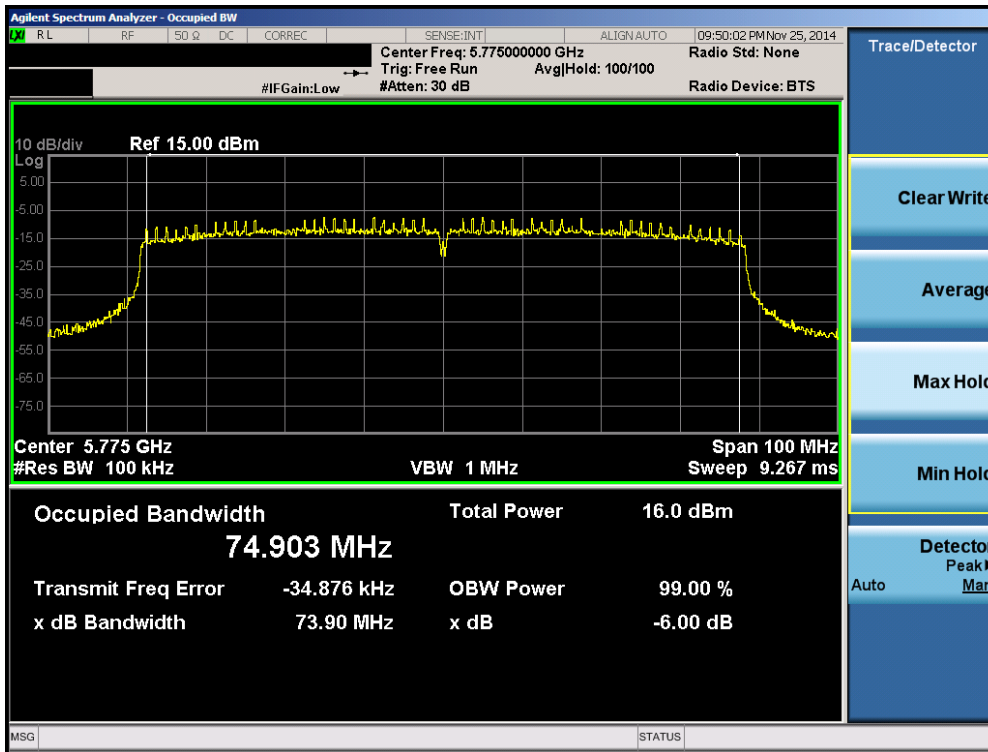

Plot 6-36. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMN916KOR	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 32 of 121

6.3 Output Power Measurement §15.247(b.3)

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

KDB 558074 v03r02 – Section 9.1.2 PKPM1 Peak Power Method
 KDB 558074 v03r02 – Section 9.2.3.2 Method AVGP-M-G
 KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGP-M-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

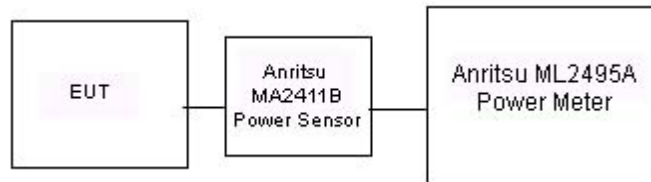




Figure 6-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 33 of 121	

Antenna-1 Output Power Measurement – 802.11b/g/n (2.4GHz)

Mode	Freq [MHz]	Channel	Detector	802.11b Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	AVG	16.98	17.08	17.11	17.06
			PEAK	19.73	19.70	19.71	19.68
802.11b	2437	6	AVG	16.89	17.05	17.08	16.99
			PEAK	19.42	19.43	19.24	19.24
802.11b	2462	11	AVG	16.62	16.74	16.81	16.63
			PEAK	19.06	19.02	19.12	18.88



Table 6-4. 802.11b Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	12.60	12.62	12.59	12.63	12.79	12.86	12.81	12.82
			PEAK	18.81	18.73	18.85	19.04	20.60	20.54	20.62	20.67
802.11g	2437	6	AVG	12.47	12.46	12.41	12.46	12.65	12.65	12.68	12.66
			PEAK	18.66	18.50	18.53	18.96	20.38	20.29	20.59	20.62
802.11g	2462	11	AVG	12.47	12.51	12.43	12.48	12.62	12.75	12.68	12.63
			PEAK	18.62	18.57	18.63	18.73	20.55	20.33	20.34	20.41

Table 6-5. 802.11g Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11n (2.4GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	AVG	11.53	11.51	11.54	11.91	11.86	11.87	11.90	11.88
			PEAK	17.80	17.81	17.89	19.66	19.67	19.71	16.67	19.68
802.11n	2437	6	AVG	11.43	11.47	11.43	11.85	11.76	11.80	11.81	11.80
			PEAK	17.56	17.39	17.66	19.30	19.32	19.42	16.39	19.35
802.11n	2462	11	AVG	11.06	11.01	11.10	11.45	11.34	11.46	11.43	11.40
			PEAK	17.22	17.17	17.20	18.92	19.02	19.22	16.08	19.09

Table 6-6. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 34 of 121	



Antenna-1 Output Power Measurement – 802.11a/n/ac (5GHz)

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	9.84	9.88	9.90	9.92	10.13	10.13	10.16	10.19
			PEAK	15.74	15.77	15.90	16.05	17.79	17.74	17.98	17.75
802.11a	5765	153	AVG	9.75	9.83	9.82	9.78	10.05	10.03	10.13	10.05
			PEAK	15.72	15.65	15.83	16.08	17.84	17.81	17.95	17.69
802.11a	5785	157	AVG	9.82	9.82	9.90	9.86	10.10	10.10	10.17	10.19
			PEAK	15.78	15.90	15.95	16.22	17.95	17.96	18.05	17.87
802.11a	5805	161	AVG	10.17	10.22	10.20	10.20	10.37	10.47	10.48	10.47
			PEAK	16.08	16.08	16.08	16.31	18.12	18.17	18.34	18.09
802.11a	5825	165	AVG	10.29	10.30	10.28	10.29	10.47	10.49	10.45	10.49
			PEAK	16.15	16.14	16.37	16.46	18.38	18.25	18.55	18.25

Table 6-7. 802.11a Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	5745	149	AVG	9.68	9.62	9.75	10.11	10.13	10.17	10.16	10.19
			PEAK	15.67	15.62	15.95	17.64	17.67	17.76	17.67	17.84
802.11n	5765	153	AVG	9.51	9.42	9.63	9.95	9.95	10.03	9.99	9.99
			PEAK	15.51	15.46	15.81	17.41	17.48	17.64	17.34	17.68
802.11n	5785	157	AVG	9.57	9.48	9.64	10.05	9.96	10.03	10.01	10.06
			PEAK	15.60	15.50	15.94	17.47	17.59	17.63	17.62	17.82
802.11n	5805	161	AVG	9.87	9.84	9.97	10.23	10.34	10.34	10.33	10.41
			PEAK	15.85	15.81	16.17	17.87	17.83	17.97	17.88	17.99
802.11n	5825	165	AVG	10.01	9.93	10.12	10.44	10.49	10.47	10.46	10.45
			PEAK	15.99	15.94	16.25	18.03	18.06	17.98	17.96	18.12

Table 6-8. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 35 of 121	

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27	40.5	54	81	108	121.5	135
802.11n	5755	151	AVG	9.19	9.16	9.21	9.22	9.21	9.19	9.23	9.21
			PEAK	15.13	15.02	15.17	16.46	16.62	16.17	16.57	16.61
802.11n	5795	159	AVG	9.42	9.44	9.45	9.42	9.45	9.44	9.39	9.48
			PEAK	15.25	15.10	15.40	16.59	16.72	16.20	16.53	16.90

Table 6-9. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				6.5 Mbps
802.11ac	5745	149	AVG	9.73
			PEAK	15.77
802.11ac	5785	157	AVG	9.64
			PEAK	15.64
802.11ac	5825	165	AVG	9.97
			PEAK	15.97



Table 6-10. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				13.5 Mbps
802.11ac	5755	151	AVG	9.16
			PEAK	15.14
802.11ac	5795	159	AVG	9.38
			PEAK	15.41

Table 6-11. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5775	155	AVG	8.02	7.97	8.08	7.99	8.10	8.18	8.01	7.91	7.99	8.02
			PEAK	13.39	13.34	13.51	14.14	14.36	14.21	14.11	14.12	14.13	14.13

Table 6-12. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 -12/24/2014	EUT Type: Portable Handset	Page 36 of 121	

Antenna-2 Output Power Measurement – 802.11b/g/n (2.4GHz)

Mode	Freq [MHz]	Channel	Detector	802.11b Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	AVG	16.15	16.37	16.41	16.42
			PEAK	18.64	19.08	19.00	18.91
802.11b	2437	6	AVG	16.18	16.42	16.42	16.39
			PEAK	18.68	18.97	18.98	18.97
802.11b	2462	11	AVG	15.87	16.12	16.20	16.08
			PEAK	18.27	18.57	18.53	18.59



Table 6-13. 802.11b Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	12.63	12.68	12.79	12.78	12.97	12.91	13.02	12.93
			PEAK	18.35	18.38	18.63	18.78	19.90	20.13	19.87	19.94
802.11g	2437	6	AVG	12.95	12.95	13.05	13.10	13.25	13.27	13.34	13.29
			PEAK	18.61	18.60	18.86	19.01	20.16	20.44	20.18	20.17
802.11g	2462	11	AVG	12.56	12.61	12.68	12.63	12.97	12.85	12.93	12.83
			PEAK	18.20	18.34	18.38	18.71	19.63	19.90	19.77	19.62

Table 6-14. 802.11g Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11n (2.4GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	AVG	11.31	11.29	11.36	11.63	11.62	11.63	11.67	11.56
			PEAK	16.94	17.00	17.21	18.67	18.61	18.58	18.65	18.68
802.11n	2437	6	AVG	11.89	11.80	11.97	12.25	12.18	12.19	12.35	12.15
			PEAK	17.32	17.43	17.53	19.14	18.89	19.05	18.92	19.08
802.11n	2462	11	AVG	11.49	11.46	11.60	11.80	11.79	11.83	11.90	11.80
			PEAK	17.07	17.16	17.45	18.78	18.84	18.77	18.79	18.94

Table 6-15. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 37 of 121	



Antenna-2 Output Power Measurement – 802.11a/n (5GHz)

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	9.79	9.82	9.79	9.91	10.02	10.03	9.93	9.97
			PEAK	15.42	15.51	15.56	17.08	17.29	17.09	17.04	17.17
802.11a	5765	153	AVG	9.44	9.49	9.50	9.55	9.72	9.73	9.61	9.61
			PEAK	14.99	14.93	15.14	16.65	16.74	16.58	16.59	16.65
802.11a	5785	157	AVG	9.48	9.52	9.53	9.65	9.63	9.77	9.62	9.66
			PEAK	15.12	15.26	15.38	16.63	16.87	16.71	16.77	16.85
802.11a	5805	161	AVG	9.66	9.76	9.73	9.69	9.92	9.90	9.73	9.84
			PEAK	15.31	15.40	15.27	17.02	16.99	17.05	16.89	16.96
802.11a	5825	165	AVG	9.62	9.73	9.57	9.79	9.84	9.84	9.77	9.83
			PEAK	15.25	15.41	15.40	16.83	17.05	16.85	16.95	17.06

Table 6-16. 802.11a Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	5745	149	AVG	9.62	9.64	9.69	10.01	10.03	10.02	10.03	9.98
			PEAK	15.16	15.43	15.42	17.02	16.97	16.99	17.01	17.01
802.11n	5765	153	AVG	9.28	9.31	9.33	9.65	9.76	9.75	9.66	9.59
			PEAK	14.85	15.02	15.05	16.67	16.73	16.67	16.69	16.64
802.11n	5785	157	AVG	9.31	9.41	9.31	9.70	9.69	9.69	9.67	9.68
			PEAK	14.77	14.96	14.95	16.60	16.38	16.60	16.52	16.77
802.11n	5805	161	AVG	9.56	9.59	9.61	9.99	9.97	9.97	9.95	9.92
			PEAK	15.07	15.48	15.32	16.95	16.88	16.94	16.96	16.85
802.11n	5825	165	AVG	9.47	9.47	9.58	9.85	9.85	9.90	9.80	9.84
			PEAK	15.13	15.25	15.38	16.99	17.02	16.91	16.94	16.94

Table 6-17. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMN916KOR		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset		Page 38 of 121

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27	40.5	54	81	108	121.5	135
802.11n	5755	151	AVG	9.23	9.11	9.09	9.07	9.12	9.07	9.09	9.23
			PEAK	14.79	14.71	14.83	16.02	15.88	15.63	15.75	15.96
802.11n	5795	159	AVG	9.25	9.17	9.08	9.08	9.07	9.13	9.16	9.29
			PEAK	14.83	14.79	14.80	15.93	15.92	15.69	15.93	16.10

Table 6-18. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				6.5 Mbps
802.11ac	5745	149	AVG	9.65
			PEAK	15.15
802.11ac	5785	157	AVG	9.26
			PEAK	14.74
802.11ac	5825	165	AVG	9.48
			PEAK	15.02

Table 6-19. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				13.5 Mbps
802.11ac	5755	151	AVG	9.08
			PEAK	14.92
802.11ac	5795	159	AVG	9.10
			PEAK	14.95

Table 6-20. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5775	155	AVG	7.57	7.62	7.63	7.76	7.71	7.77	7.78	7.77	7.81	7.79
			PEAK	13.01	13.13	13.19	13.81	13.83	13.91	13.96	14.01	13.94	13.97

Table 6-21. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

MIMO Output Power Measurement – 802.11n (2.4GHz, 5GHz)

Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11n	2412	1	AVG	11.53	11.31	14.43
			PEAK	17.80	16.94	20.40
802.11n	2437	6	AVG	11.43	11.89	14.68
			PEAK	17.56	17.32	20.45
802.11n	2462	11	AVG	11.06	11.49	14.29
			PEAK	17.22	17.07	20.16



Table 6-22. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements

20MHz BW 802.11n (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11n	5745	149	AVG	9.68	9.62	12.66
			PEAK	15.67	15.16	18.43
802.11n	5765	153	AVG	9.51	9.28	12.41
			PEAK	15.51	14.85	18.20
802.11n	5785	157	AVG	9.57	9.31	12.45
			PEAK	15.60	14.77	18.22
802.11n	5805	161	AVG	9.87	9.56	12.73
			PEAK	15.85	15.07	18.49
802.11n	5825	165	AVG	10.01	9.47	12.76
			PEAK	15.99	15.13	18.59

Table 6-23. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

40MHz BW 802.11n (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11n	5755	151	AVG	9.19	9.23	12.22
			PEAK	15.13	14.79	17.97
802.11n	5795	159	AVG	9.42	9.25	12.35
			PEAK	15.25	14.83	18.06

Table 6-24. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 40 of 121	

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS0		
				ANT1	ANT2	MIMO
802.11ac	5745	149	AVG	9.73	9.65	12.70
			PEAK	15.77	15.15	18.48
802.11ac	5785	157	AVG	9.64	9.26	12.46
			PEAK	15.64	14.74	18.22
802.11ac	5825	165	AVG	9.97	9.48	12.74
			PEAK	15.97	15.02	18.53

Table 6-25. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS0		
				ANT1	ANT2	MIMO
802.11ac	5755	151	AVG	9.16	9.08	12.13
			PEAK	15.14	14.92	18.04
802.11ac	5795	159	AVG	9.38	9.10	12.25
			PEAK	15.41	14.95	18.20

Table 6-26. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

80MHz BW 802.11ac (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS0		
				ANT1	ANT2	MIMO
802.11ac	5775	155	AVG	8.02	7.57	10.81
			PEAK	13.39	13.01	16.21

Table 6-27. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

Note:



Per KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 11.53 dBm for Antenna-1 and 11.31 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(11.53 \text{ dBm} + 11.31 \text{ dBm}) = (14.22 \text{ mW} + 13.52 \text{ mW}) = 27.74 \text{ mW} = 14.43 \text{ dBm}$$

FCC ID: A3LSMN916KOR	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1411242157.A3L	Test Dates: 7/28 - 10/2/2014, 11/24 - 12/24/2014	EUT Type: Portable Handset	Page 41 of 121	