



Plot 7-694. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – PCC 1/49 SCC 1/0 – Low Channel)

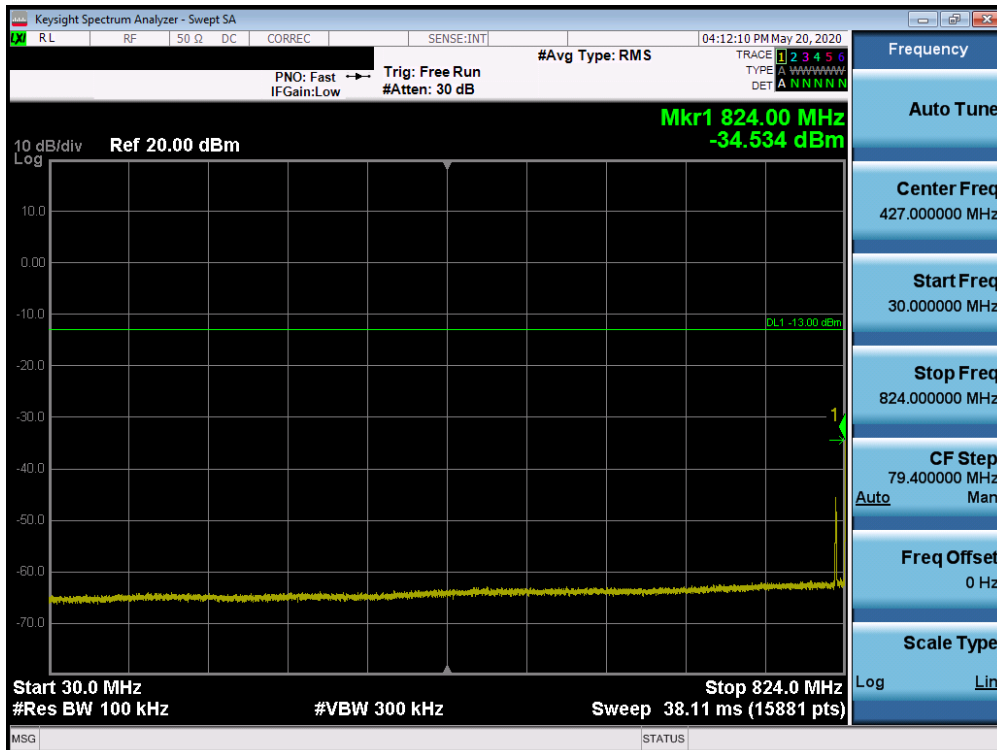


Plot 7-695. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – PCC 1/0 SCC 1/49 – High Channel)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 381 of 494

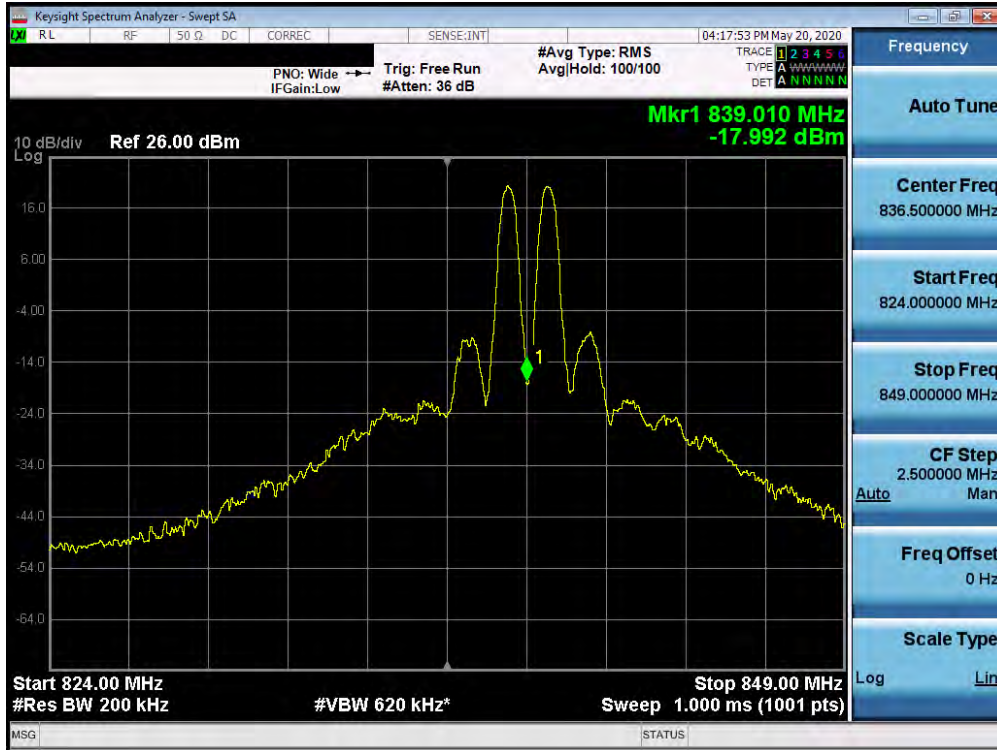


Plot 7-696. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – PCC 1/0 SCC 1/49 – High Channel)

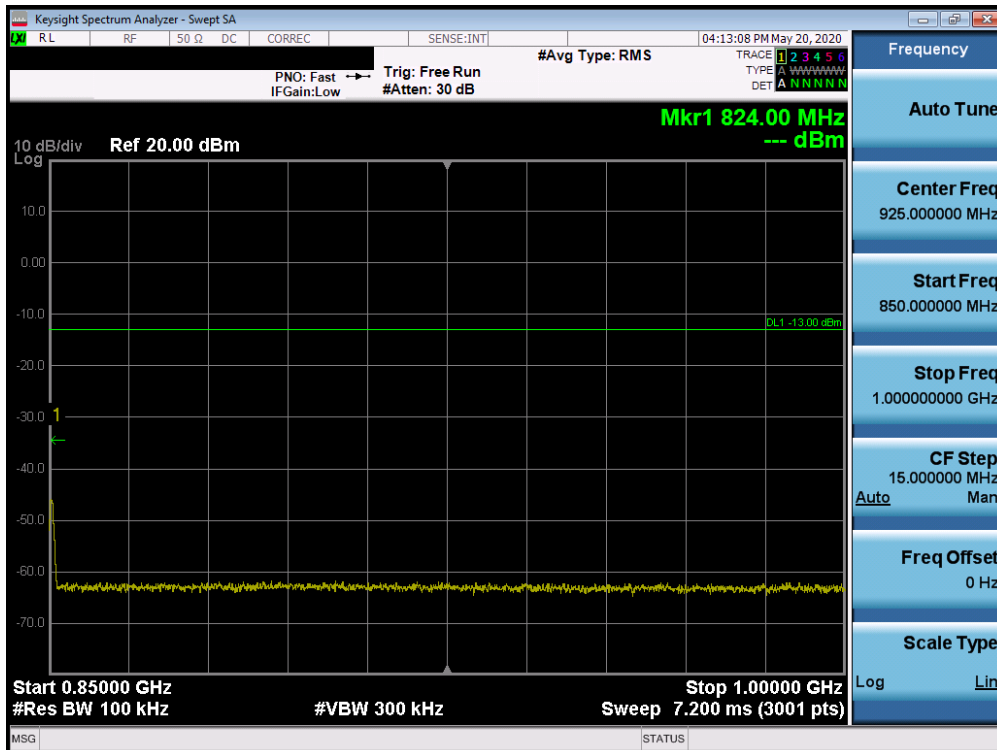


Plot 7-697. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – PCC 1/0 SCC 1/49 – High Channel)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 382 of 494

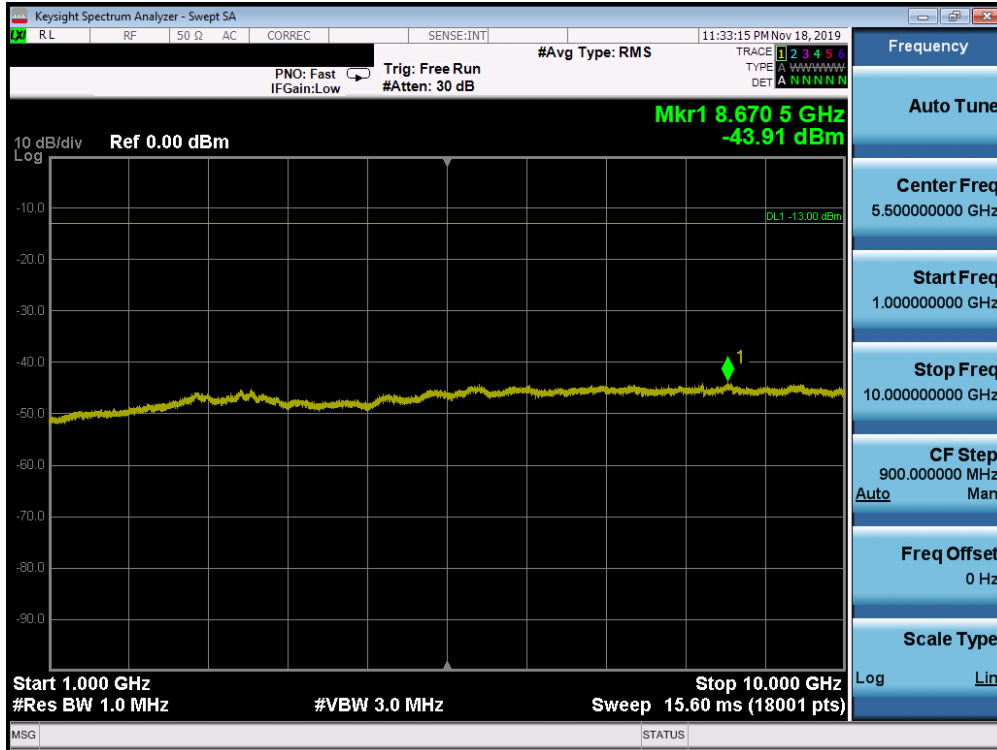


Plot 7-698. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – PCC 1/0 SCC 1/49 – High Channel)

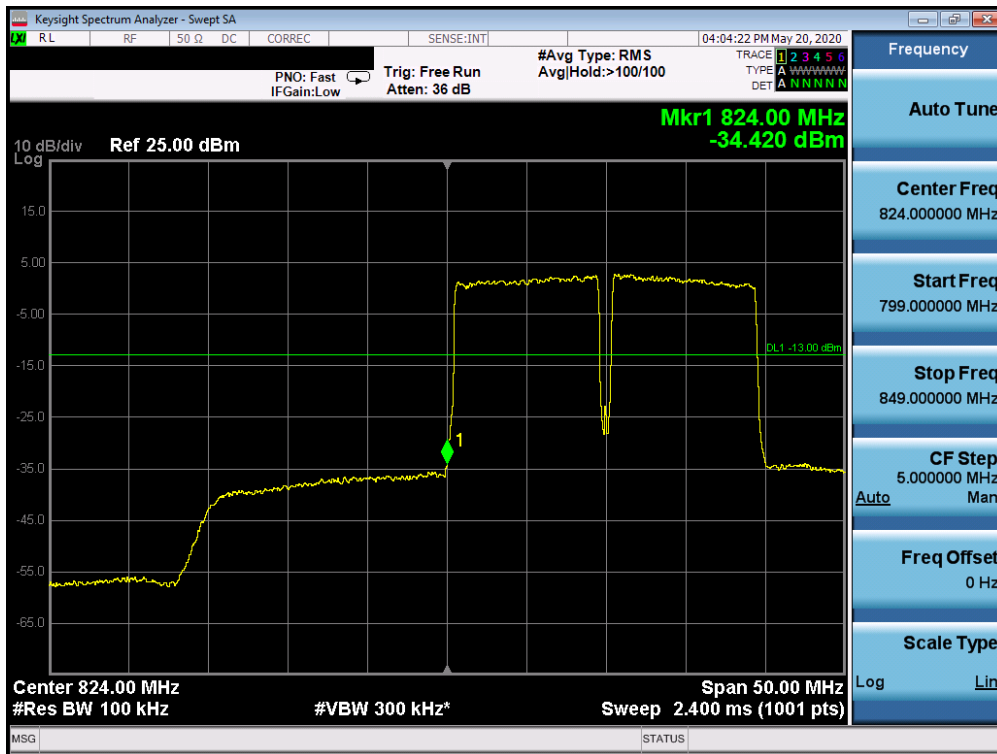

Plot 7-699. Lower Band Edge Plot (Band 5 QPSK – PCC:10 MHz SCC:10 MHz – Full RB)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 383 of 494

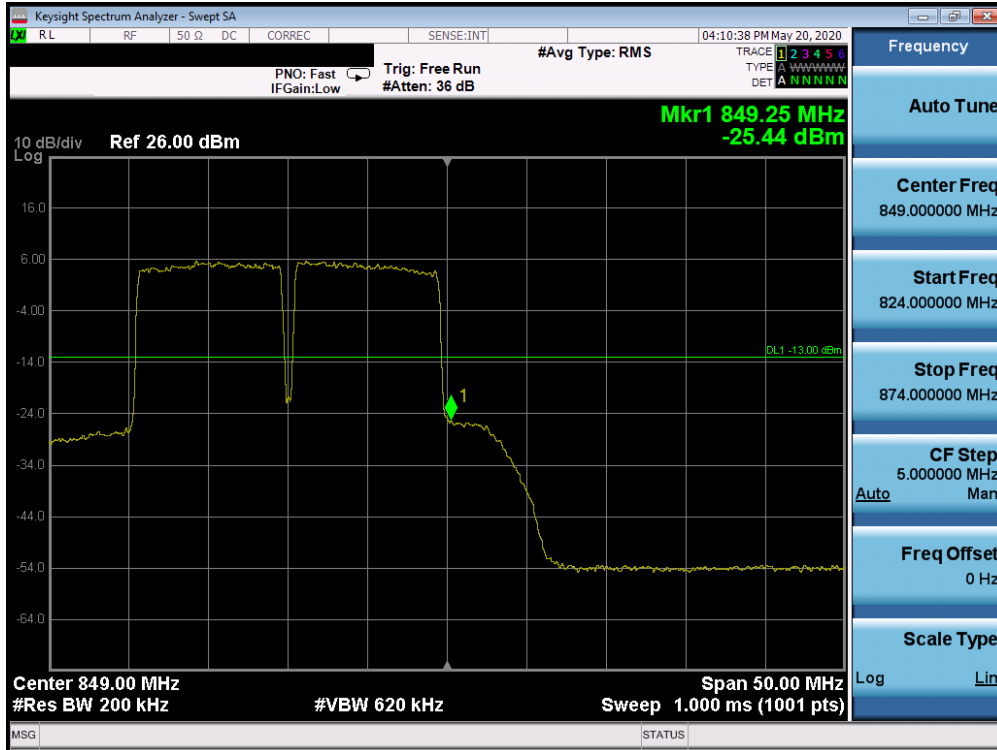

Plot 7-700. Upper Band Edge Plot (Band 5 QPSK – PCC:10 MHz SCC:10 MHz – Full RB)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 384 of 494

Uplink CA Configuration 66B/C


PCC						SCC						ULCA Tx.Power (dBm)
Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	
132072	1720.0	20	QPSK	1	99	132270	1739.8	20	QPSK	1	0	23.41
132322	1745.0	20	QPSK	1	99	132520	1764.8	20	QPSK	1	0	23.55
132572	1770.0	20	QPSK	1	0	132374	1750.2	20	QPSK	1	99	24.06

Table 7-5. Conducted Powers (B66 – 20MHz + 20MHz Channel Bandwidth – PCC/SCC: RB Size 1)


PCC						SCC						ULCA Tx.Power (dBm)
Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	
132072	1720.0	20	QPSK	100	0	132270	1739.8	20	QPSK	100	0	22.01
132072	1720.0	20	16-QAM	100	0	132270	1739.8	20	16-QAM	100	0	21.23
132072	1720.0	20	64-QAM	100	0	132270	1739.8	20	64-QAM	100	0	20.41
132072	1720.0	20	256-QAM	100	0	132270	1739.8	20	256-QAM	100	0	18.30

Table 7-6. Conducted Powers (B66 with Various Combinations for 20MHz + 20MHz Channel Bandwidth)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 385 of 494

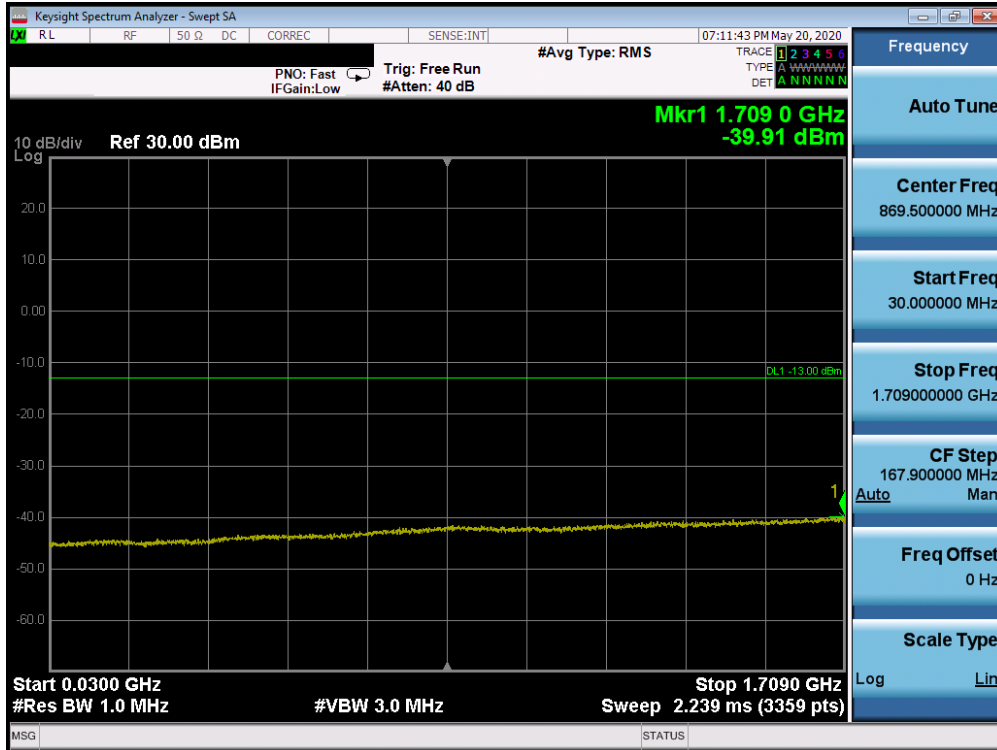


Plot 7-701. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/99 SCC 1/0 – Low Channel)

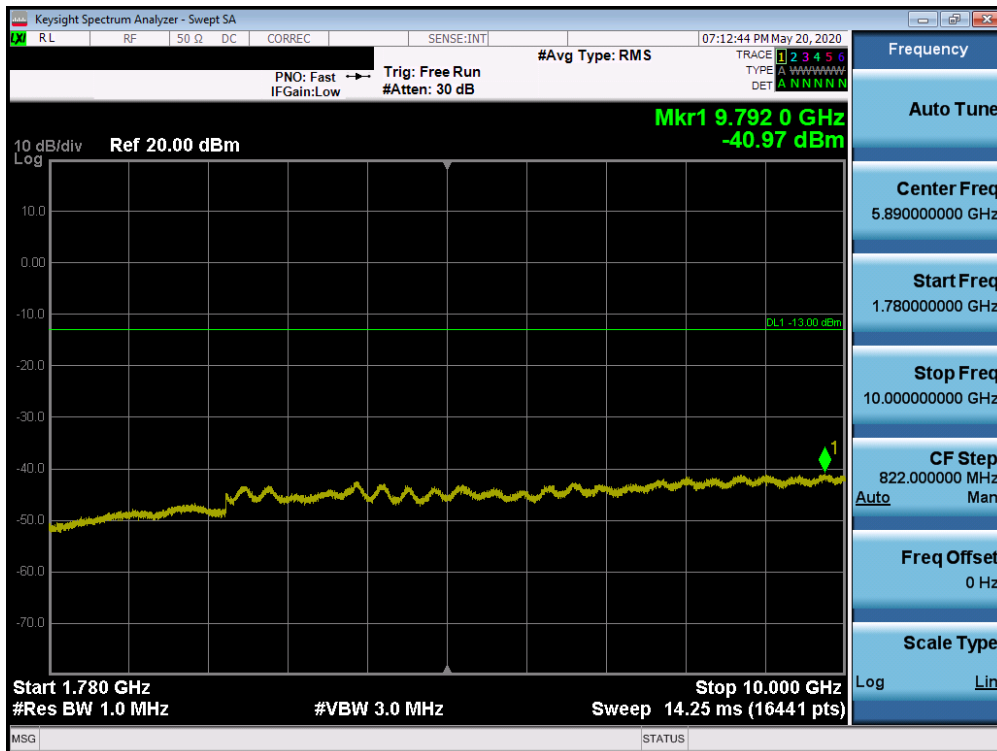


Plot 7-702. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/99 SCC 1/0 – Low Channel)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 386 of 494

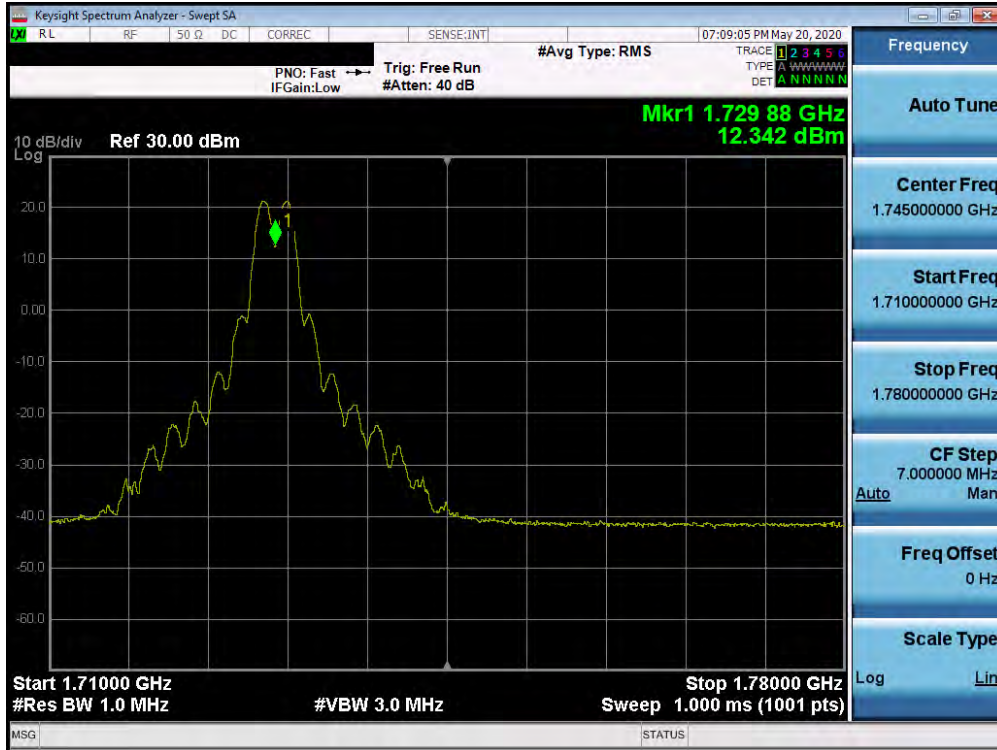


Plot 7-703. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/99 SCC 1/0 – Low Channel)

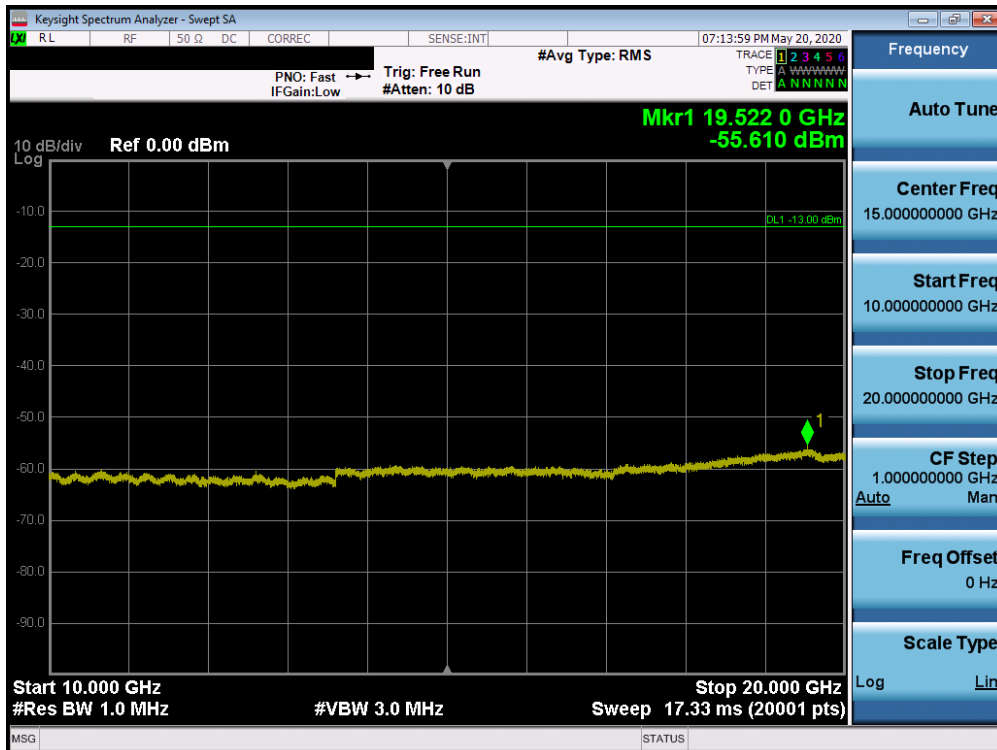


Plot 7-704. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/99 SCC 1/0 – Low Channel)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 387 of 494

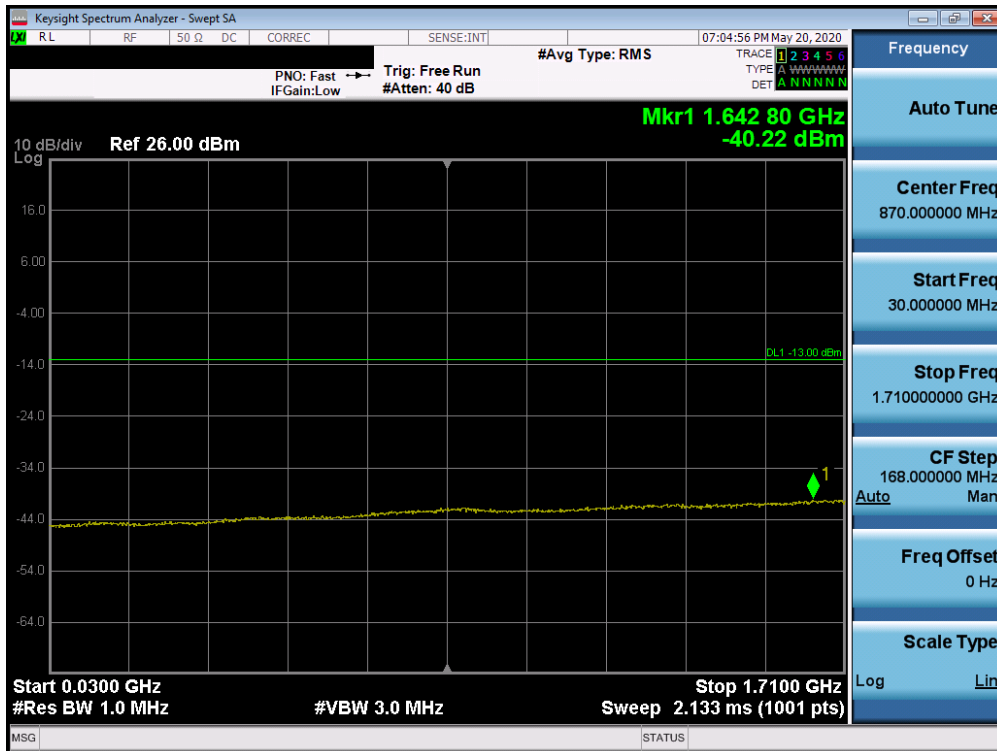


Plot 7-705. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/99 SCC 1/0 – Mid Channel)

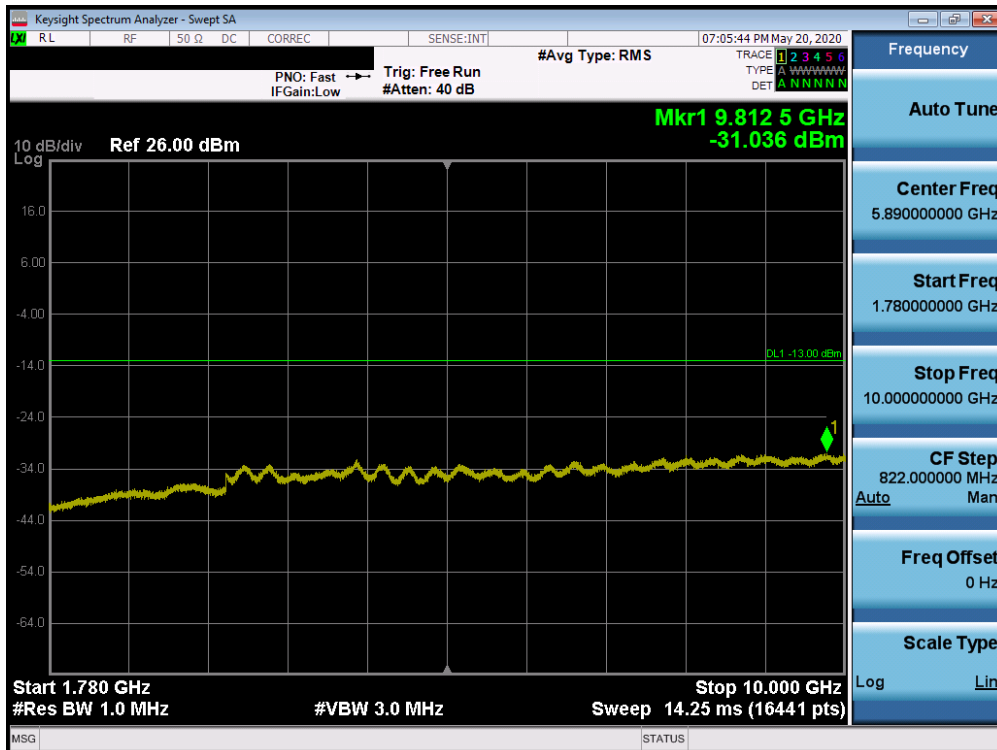


Plot 7-706. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/99 SCC 1/0 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 388 of 494

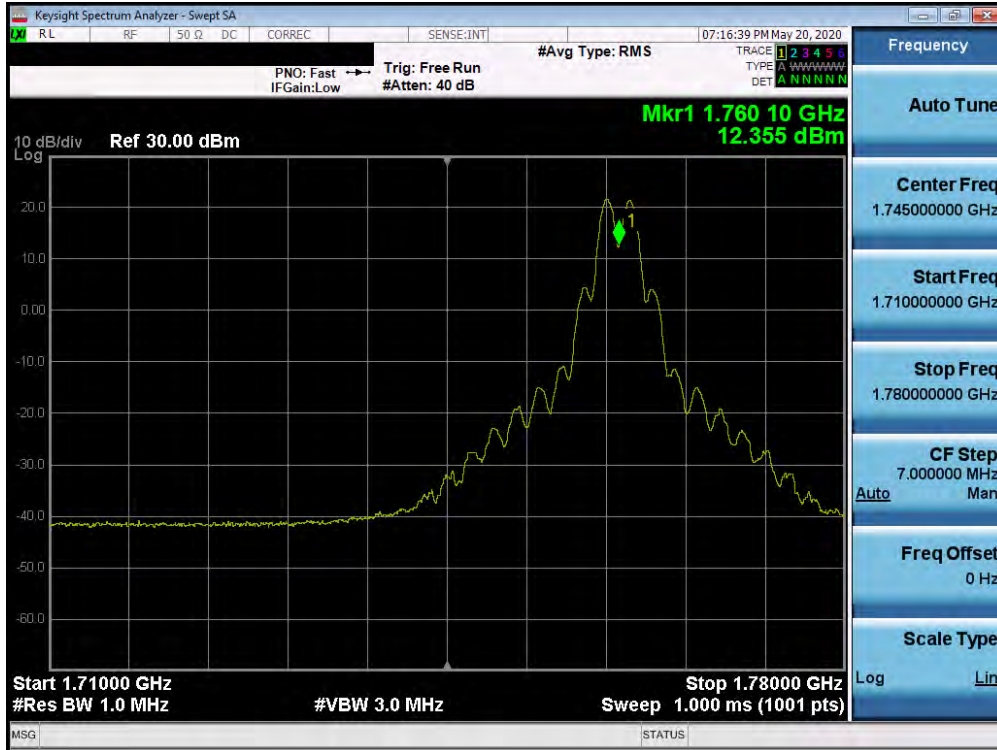


Plot 7-711. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/0 SCC 1/99 – High Channel)

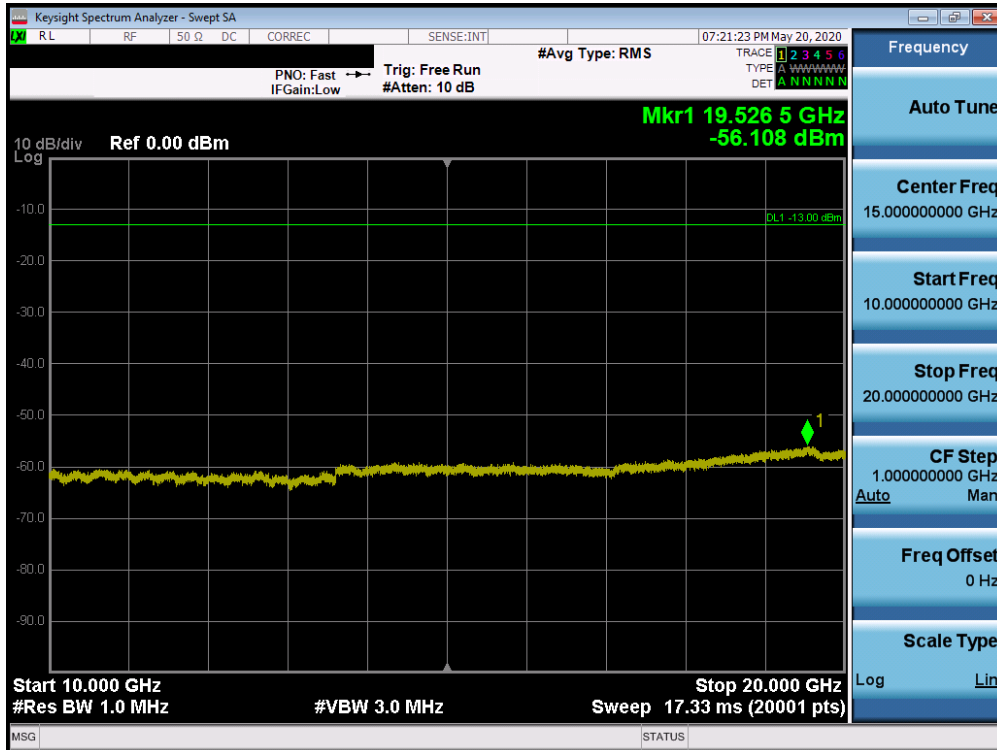


Plot 7-712. Conducted Spurious Plot (Band 66 – 20.0MHz QPSK – PCC 1/0 SCC 1/99 – High Channel)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 391 of 494

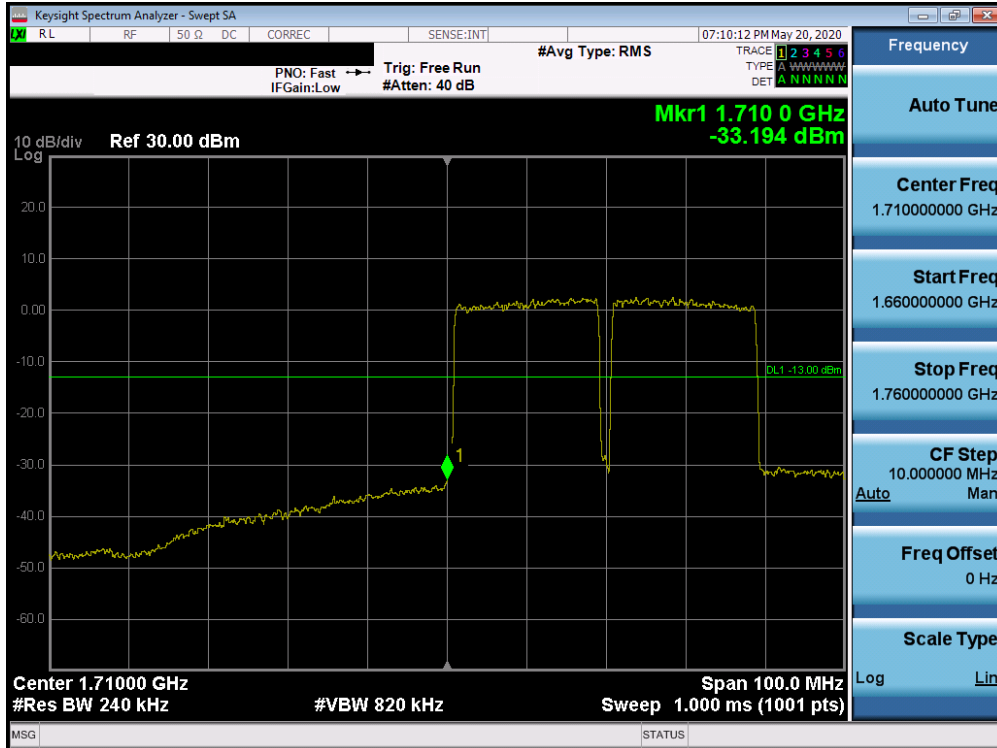

Plot 7-713. Lower Band Edge Plot (Band 66 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

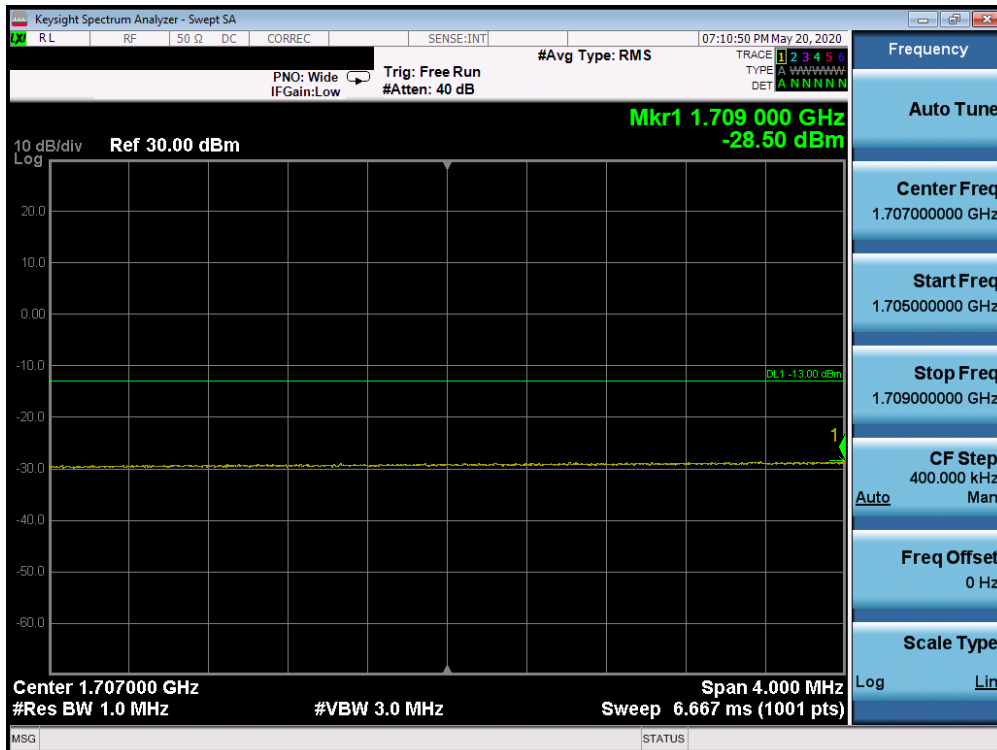


Plot 7-714. Extended Lower Band Edge Plot (Band 66 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 392 of 494



Plot 7-715. Upper Band Edge Plot (Band 66 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

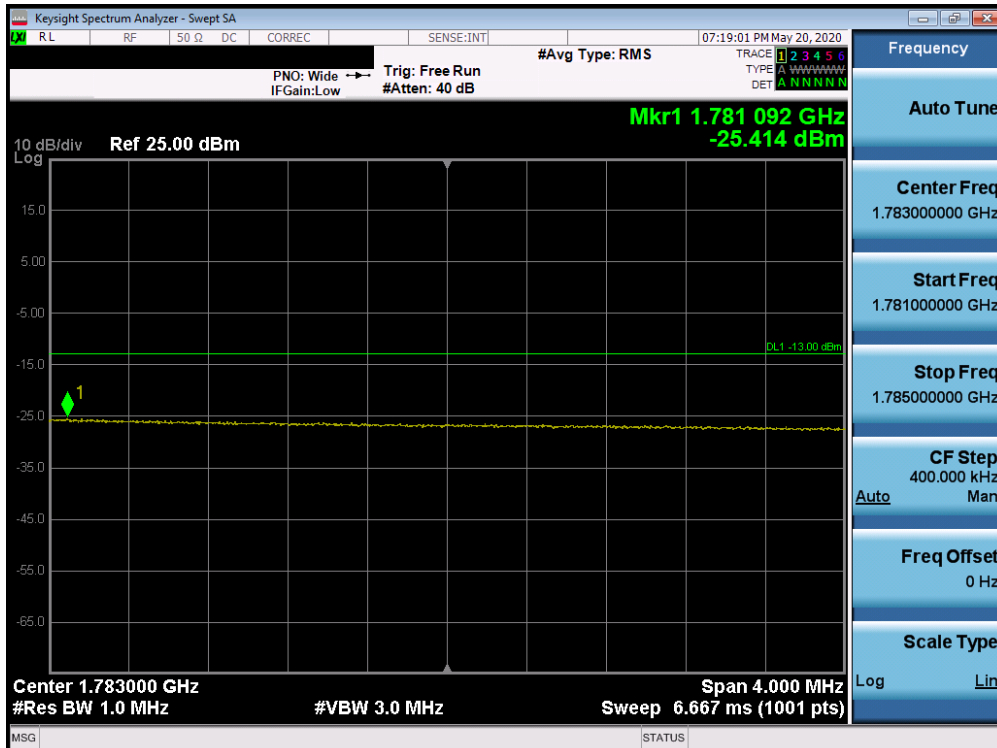

Plot 7-716. Extended Upper Band Edge Plot (Band 66 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 393 of 494

Uplink CA Configuration 41C

PCC						SCC						ULCA Tx.Power (dBm)
Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	
39750	2506.0	20	QPSK	1	99	39948	2525.8	20	QPSK	1	0	26.01
40620	2593.0	20	QPSK	1	99	40818	2612.8	20	QPSK	1	0	26.48
41490	2680.0	20	QPSK	1	0	41292	2660.2	20	QPSK	1	99	26.00

Table 7-7. Conducted Powers (B41 – Left Carrier: RB Size 1 Offset Max Right Carrier: RB Size 1 Offset 0)

PCC						SCC						ULCA Tx.Power (dBm)
Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	
39650	2496.0	20	QPSK	100	0	39948	2525.8	20	QPSK	100	0	24.32
39650	2496.0	20	16-QAM	100	0	39948	2525.8	20	16-QAM	100	0	23.18
39650	2496.0	20	64-QAM	100	0	39948	2525.8	20	64-QAM	100	0	22.01
39650	2496.0	20	256-QAM	100	0	39948	2525.8	20	256-QAM	100	0	19.65

Table 7-8. Conducted Powers (B41 with Various Combinations for 20MHz Channel Bandwidth)

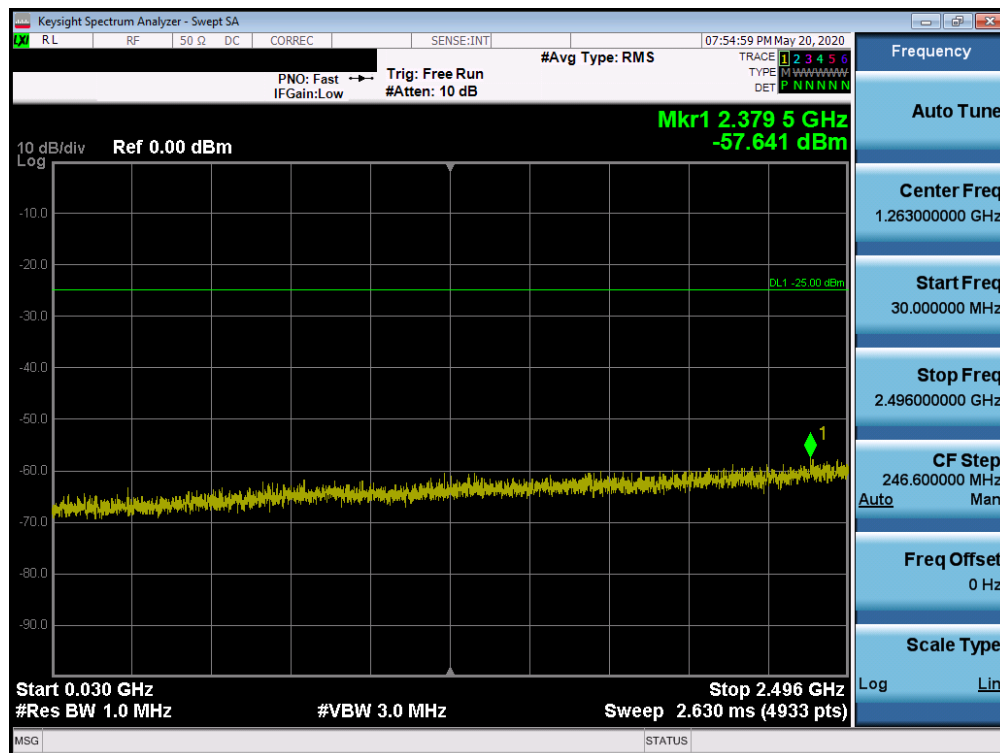


Table 7-717. Conducted Spurious Plot (Band 41 – 20.0MHz QPSK – Left Carrier 1/99 Right Carrier 1/0 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 394 of 494

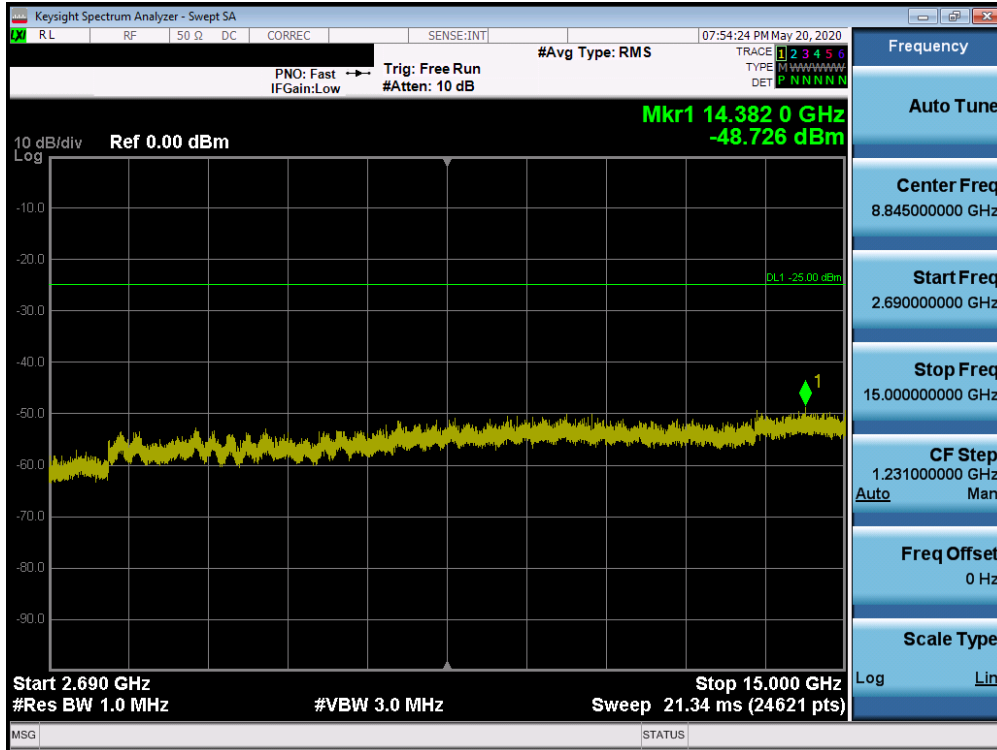


Table 7-718. Conducted Spurious Plot (Band 41 – 20.0MHz QPSK – Left Carrier 1/99 Right Carrier 1/0 – Mid Channel)

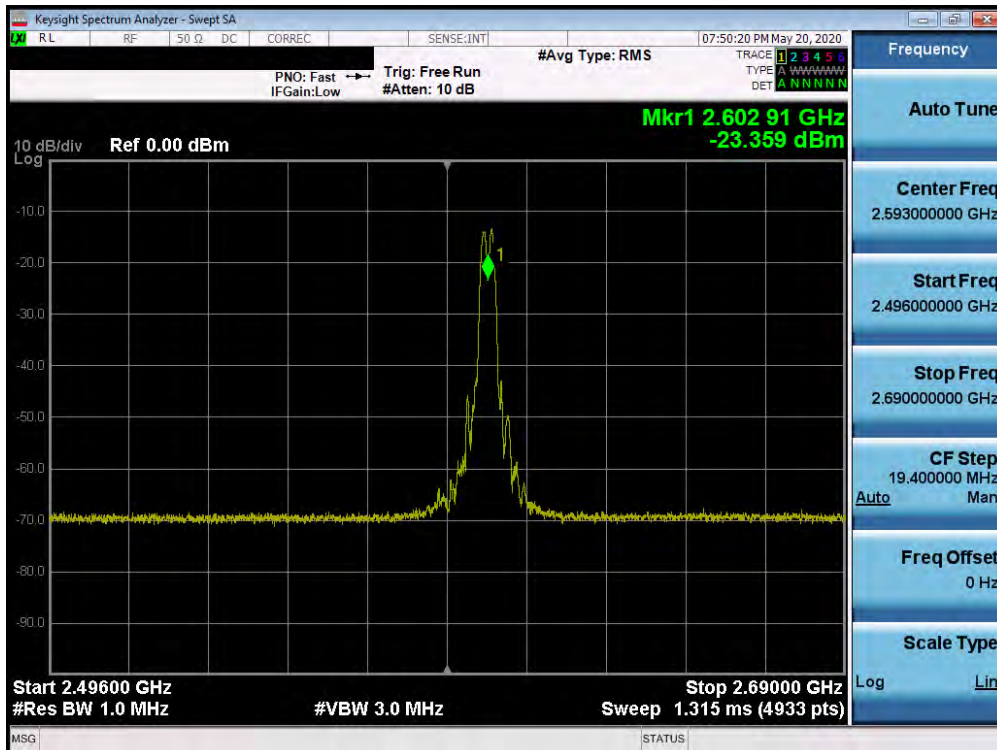


Table 7-719. Conducted Spurious Plot (Band 41 – 20.0MHz QPSK – Left Carrier 1/99 Right Carrier 1/0 – Mid Channel)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 395 of 494

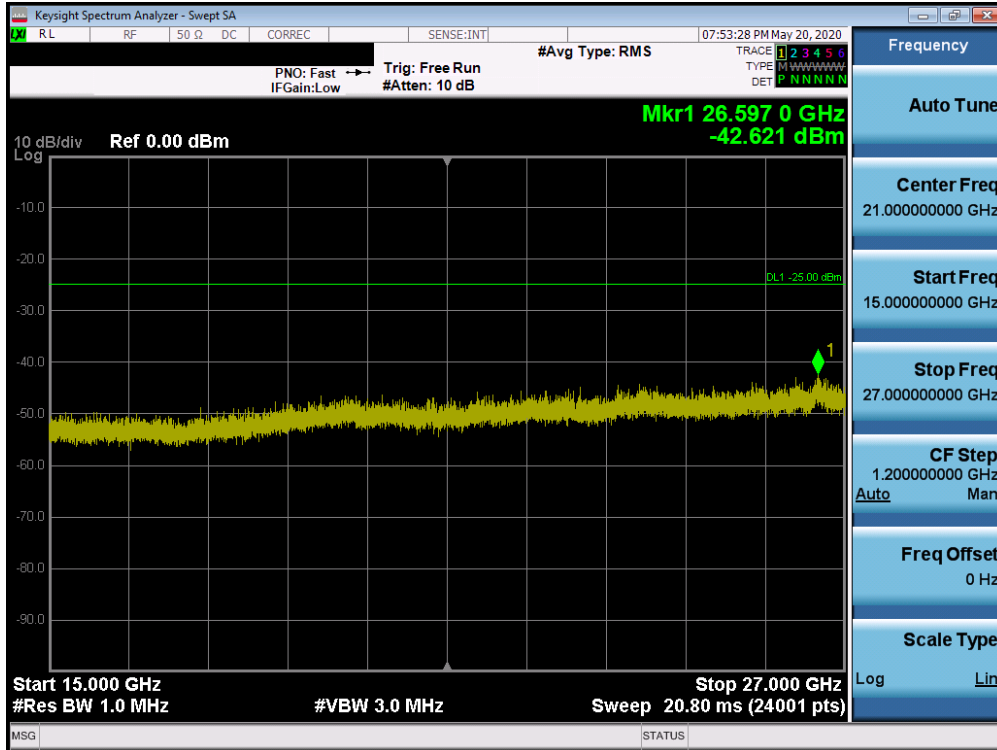


Table 7-720. Conducted Spurious Plot (Band 41 – 20.0MHz QPSK – Left Carrier 1/99 Right Carrier 1/0 – Mid Channel)

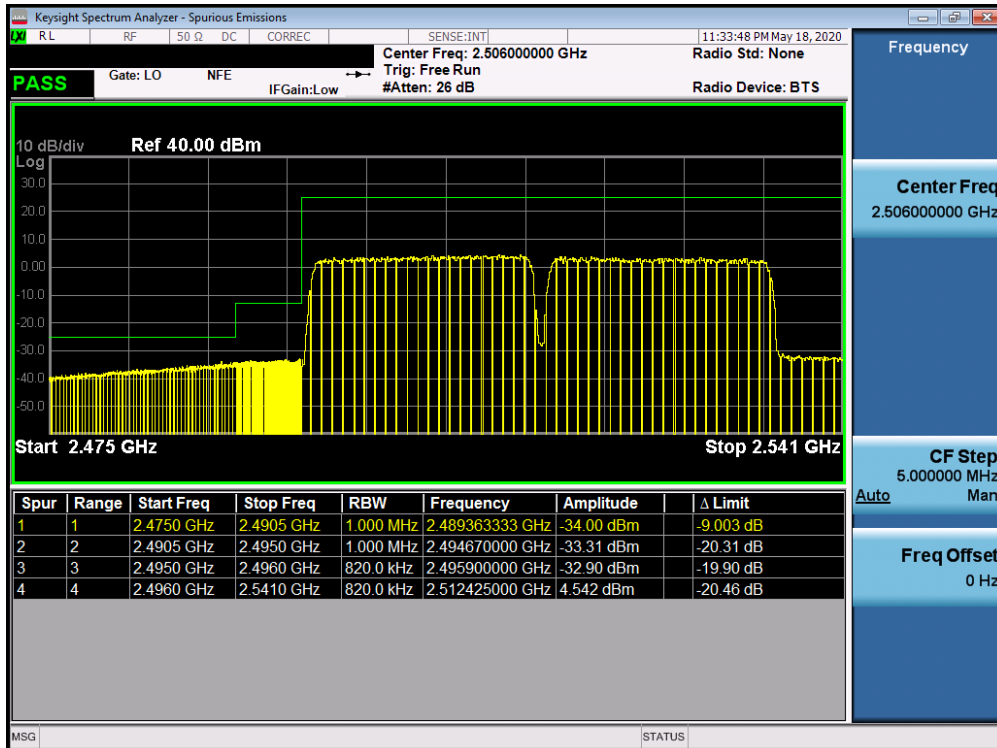


Table 7-721. Lower ACP Plot (Band 41 QPSK – Left Carrier:20 MHz Right Carrier:20 MHz – Full RB)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 396 of 494

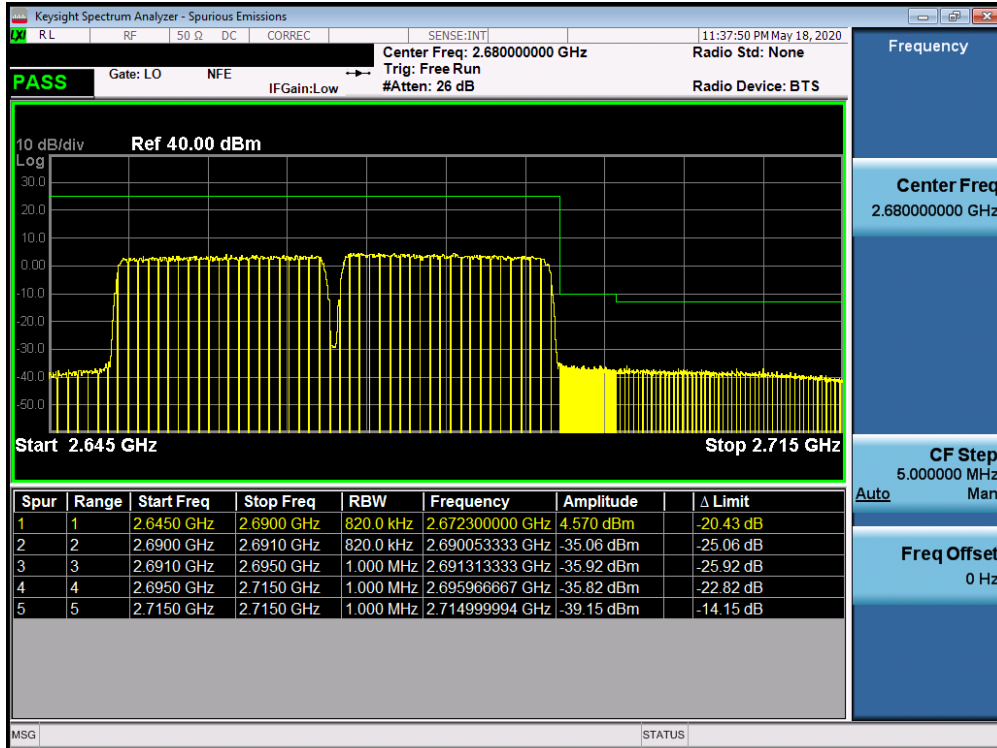


Table 7-722. Upper ACP Plot (Band 41 QPSK – Left Carrier:20 MHz Right Carrier:20 MHz – Full RB)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 397 of 494

7.7 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 398 of 494

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

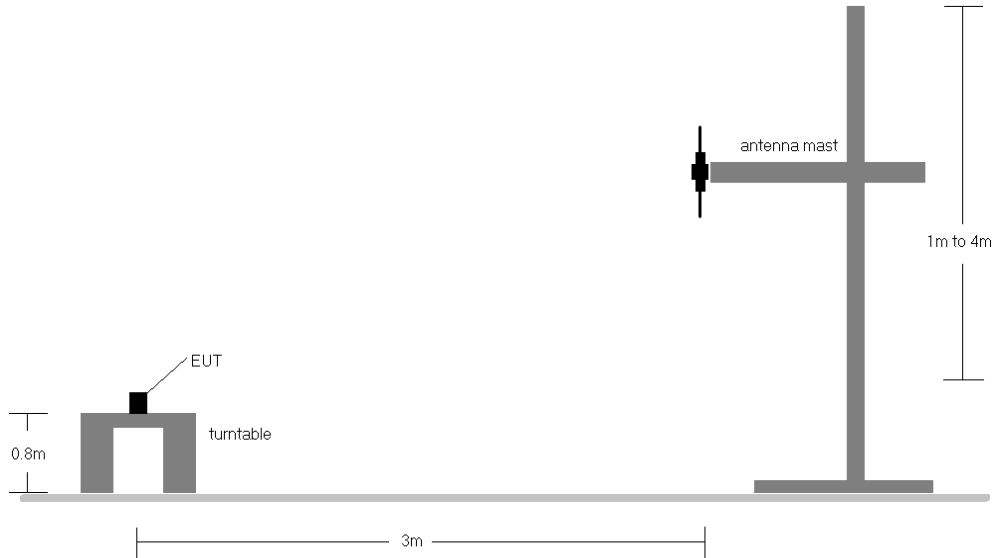


Figure 7-6. Radiated Test Setup <1GHz

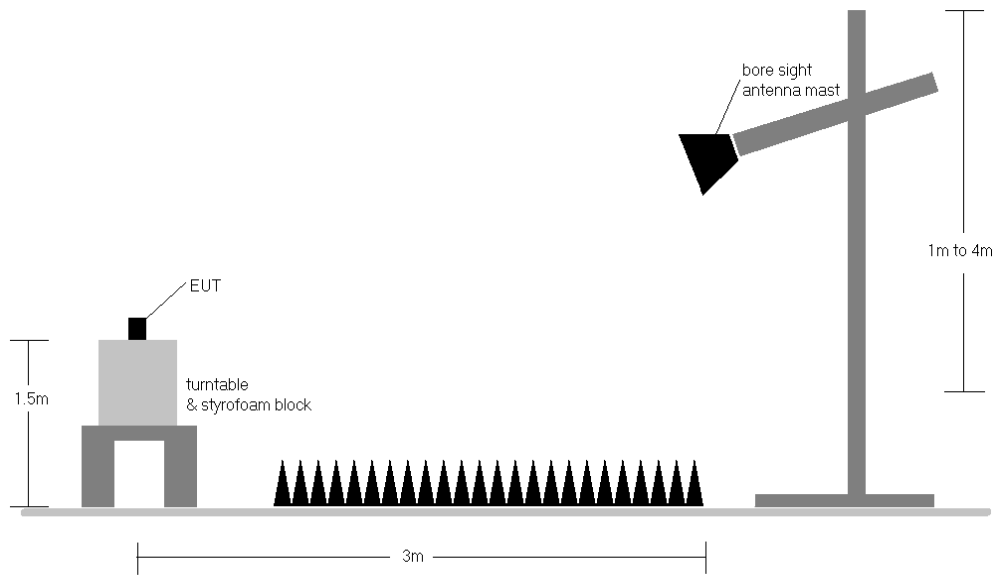


Figure 7-7. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 399 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
665.50	5	QPSK	V	172	79	16.48	2.99	17.32	0.054	34.77	-17.45
680.50	5	QPSK	V	164	70	16.20	3.19	17.24	0.053	34.77	-17.53
695.50	5	QPSK	V	152	59	15.81	3.38	17.04	0.051	34.77	-17.73
665.50	5	16-QAM	V	172	79	15.55	2.99	16.39	0.044	34.77	-18.38
665.50	5	64-QAM	V	172	79	14.66	2.99	15.50	0.035	34.77	-19.27
665.50	5	256-QAM	V	172	79	11.74	2.99	12.58	0.018	34.77	-22.19
668.00	10	QPSK	V	160	70	16.26	3.02	17.13	0.052	34.77	-17.64
680.50	10	QPSK	V	170	64	16.16	3.19	17.20	0.052	34.77	-17.57
693.00	10	QPSK	V	146	62	15.95	3.34	17.14	0.052	34.77	-17.63
680.50	10	16-QAM	V	170	64	15.19	3.19	16.23	0.042	34.77	-18.54
680.50	10	64-QAM	V	170	64	14.50	3.19	15.54	0.036	34.77	-19.23
680.50	10	256-QAM	V	170	64	11.37	3.19	12.41	0.017	34.77	-22.36
670.50	15	QPSK	V	166	81	16.19	3.06	17.10	0.051	34.77	-17.67
680.50	15	QPSK	V	166	58	16.13	3.19	17.17	0.052	34.77	-17.60
690.50	15	QPSK	V	153	69	15.91	3.31	17.07	0.051	34.77	-17.70
680.50	15	16-QAM	V	166	58	15.26	3.19	16.30	0.043	34.77	-18.47
680.50	15	64-QAM	V	166	58	14.44	3.19	15.48	0.035	34.77	-19.29
690.50	15	256-QAM	V	153	69	11.54	3.31	12.70	0.019	34.77	-22.07
673.00	20	QPSK	V	166	81	14.14	3.09	15.08	0.032	34.77	-19.69
680.50	20	QPSK	V	166	58	15.53	3.19	16.57	0.045	34.77	-18.21
688.00	20	QPSK	V	153	69	16.07	3.28	17.20	0.052	34.77	-17.57
688.00	20	16-QAM	V	153	69	15.42	3.28	16.55	0.045	34.77	-18.22
688.00	20	64-QAM	V	153	69	14.42	3.28	15.55	0.036	34.77	-19.22
688.00	20	256-QAM	V	153	69	11.22	3.28	12.35	0.017	34.77	-22.42
665.50	5	QPSK	H	235	74	13.73	3.19	14.77	0.030	34.77	-20.01
665.50	5 (WCP)	QPSK	V	156	77	13.19	3.19	14.23	0.026	34.77	-20.55

Table 7-9. ERP Data (Band 71)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 400 of 494



Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
20 MHz	π/2 BPSK	673.0	V	176.0	81.0	4.09	1 / 0	13.34	15.28	0.034	34.77	-19.49
		680.5	V	179.0	61.0	4.24	1 / 0	14.12	16.21	0.042	34.77	-18.57
		688.0	V	179.0	77.0	4.48	1 / 0	14.09	16.42	0.044	34.77	-18.35
	QPSK	673.0	V	176.0	81.0	4.09	1 / 0	13.42	15.36	0.034	34.77	-19.41
		680.5	V	179.0	61.0	4.24	1 / 0	14.28	16.37	0.043	34.77	-18.41
		688.0	V	179.0	77.0	4.48	1 / 0	14.22	16.55	0.045	34.77	-18.22
	16-QAM	688.0	V	179.0	77.0	4.48	1 / 0	13.49	15.82	0.038	34.77	-18.95
64-QAM	680.5	V	179.0	61.0	4.24	1 / 0	12.45	14.54	0.028	34.77	-20.24	
256-QAM	680.5	V	179.0	61.0	4.24	1 / 0	10.62	12.71	0.019	34.77	-22.07	
15 MHz	π/2 BPSK	670.5	V	176.0	81.0	3.96	1/1	14.44	16.25	0.042	34.77	-18.52
		680.5	V	179.0	61.0	4.24	1/1	14.20	16.29	0.043	34.77	-18.49
		690.5	V	179.0	77.0	4.41	1/1	13.77	16.03	0.040	34.77	-18.74
	QPSK	670.5	V	176.0	81.0	3.96	1/1	14.55	16.36	0.043	34.77	-18.41
		680.5	V	179.0	61.0	4.24	1/1	14.21	16.30	0.043	34.77	-18.48
		690.5	V	179.0	77.0	4.41	1/1	13.67	15.93	0.039	34.77	-18.84
	16-QAM	670.5	V	176.0	81.0	3.96	1/1	14.46	16.27	0.042	34.77	-18.50
64-QAM	670.5	V	176.0	81.0	3.96	1/1	13.36	15.17	0.033	34.77	-19.60	
256-QAM	670.5	V	176.0	81.0	3.96	1/1	11.46	13.27	0.021	34.77	-21.50	
10 MHz	π/2 BPSK	668.0	V	176.0	81.0	3.82	1/1	14.57	16.25	0.042	34.77	-18.52
		680.5	V	179.0	61.0	4.24	1/1	14.20	16.29	0.043	34.77	-18.49
		693.0	V	179.0	77.0	4.44	1/1	13.74	16.03	0.040	34.77	-18.74
	QPSK	668.0	V	176.0	81.0	3.82	1/1	14.68	16.36	0.043	34.77	-18.41
		680.5	V	179.0	61.0	4.24	1/1	14.21	16.30	0.043	34.77	-18.48
		693.0	V	179.0	77.0	4.44	1/1	13.64	15.93	0.039	34.77	-18.84
	16-QAM	680.5	V	179.0	61.0	4.24	1/1	13.77	15.86	0.039	34.77	-18.92
64-QAM	680.5	V	179.0	61.0	4.24	1/1	12.45	14.54	0.028	34.77	-20.24	
256-QAM	680.5	V	179.0	61.0	4.24	1/1	10.49	12.58	0.018	34.77	-22.19	
5 MHz	π/2 BPSK	665.5	V	176.0	81.0	3.79	1/1	14.53	16.17	0.041	34.77	-18.60
		680.5	V	179.0	61.0	4.24	1/1	14.17	16.26	0.042	34.77	-18.52
		695.5	V	179.0	77.0	4.58	1/1	13.55	15.97	0.040	34.77	-18.80
	QPSK	665.5	V	176.0	81.0	3.79	1/1	14.53	16.17	0.041	34.77	-18.60
		680.5	V	179.0	61.0	4.24	1/1	14.23	16.32	0.043	34.77	-18.46
		695.5	V	179.0	77.0	4.58	1/1	13.50	15.92	0.039	34.77	-18.85
	16-QAM	665.5	V	176.0	81.0	3.79	1/1	14.32	15.96	0.039	34.77	-18.81
64-QAM	665.5	V	176.0	81.0	3.79	1/1	13.10	14.74	0.030	34.77	-20.03	
256-QAM	665.5	V	176.0	81.0	3.79	1/1	11.05	12.69	0.019	34.77	-22.08	
	QPSK (CP-OFDM)	688.0	V	179.0	61.0	4.48	1 / 0	13.94	16.27	0.042	34.77	-18.50
	QPSK (Opposite Pol.)	688.0	H	179.0	61.0	4.48	1 / 0	12.74	15.07	0.032	34.77	-19.70
	QPSK (WCP)	688.0	V	184.0	42.0	4.48	1 / 0	12.62	14.95	0.031	34.77	-19.82

Table 7-10. ERP Data (Band n71)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 401 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	V	150	108	14.76	4.56	17.17	0.052	34.77	-17.60	19.32	0.086	36.99	-17.67
707.50	1.4	QPSK	V	104	95	14.57	4.62	17.04	0.051	34.77	-17.73	19.19	0.083	36.99	-17.80
715.30	1.4	QPSK	V	111	48	14.30	4.72	16.87	0.049	34.77	-17.90	19.02	0.080	36.99	-17.97
699.70	1.4	16-QAM	V	150	108	13.77	4.56	16.18	0.041	34.77	-18.59	18.33	0.068	36.99	-18.66
715.30	1.4	64-QAM	V	111	48	12.62	4.72	15.19	0.033	34.77	-19.58	17.34	0.054	36.99	-19.65
699.70	1.4	256-QAM	V	150	108	9.95	4.56	12.36	0.017	34.77	-22.41	14.51	0.028	36.99	-22.48
700.50	3	QPSK	V	150	108	14.79	4.59	17.23	0.053	34.77	-17.54	19.38	0.087	36.99	-17.61
707.50	3	QPSK	V	104	95	14.67	4.62	17.14	0.052	34.77	-17.63	19.29	0.085	36.99	-17.70
714.50	3	QPSK	V	111	48	14.41	4.71	16.97	0.050	34.77	-17.80	19.12	0.082	36.99	-17.87
700.50	3	16-QAM	V	150	108	14.01	4.59	16.45	0.044	34.77	-18.32	18.60	0.072	36.99	-18.39
700.50	3	64-QAM	V	150	108	12.86	4.59	15.30	0.034	34.77	-19.47	17.45	0.056	36.99	-19.54
700.50	3	256-QAM	V	150	108	10.04	4.59	12.48	0.018	34.77	-22.29	14.63	0.029	36.99	-22.36
701.50	5	QPSK	V	150	108	14.31	4.60	16.76	0.047	34.77	-18.01	18.91	0.078	36.99	-18.08
707.50	5	QPSK	V	104	95	14.82	4.62	17.29	0.054	34.77	-17.48	19.44	0.088	36.99	-17.55
713.50	5	QPSK	V	111	48	14.31	4.70	16.86	0.048	34.77	-17.91	19.01	0.080	36.99	-17.98
707.50	5	16-QAM	V	104	95	13.79	4.62	16.26	0.042	34.77	-18.51	18.41	0.069	36.99	-18.58
707.50	5	64-QAM	V	104	95	12.88	4.62	15.35	0.034	34.77	-19.42	17.50	0.056	36.99	-19.49
701.50	5	256-QAM	V	150	108	9.98	4.60	12.43	0.017	34.77	-22.34	14.58	0.029	36.99	-22.41
704.00	10	QPSK	V	175	140	16.58	4.58	19.01	0.080	34.77	-15.76	21.16	0.131	36.99	-15.83
707.50	10	QPSK	V	179	128	16.78	4.62	19.25	0.084	34.77	-15.52	21.40	0.138	36.99	-15.59
711.00	10	QPSK	V	179	133	16.92	4.67	19.44	0.088	34.77	-15.33	21.59	0.144	36.99	-15.40
704.00	10	16-QAM	V	175	140	15.50	4.58	17.93	0.062	34.77	-16.84	20.08	0.102	36.99	-16.91
704.00	10	64-QAM	V	175	140	14.31	4.58	16.74	0.047	34.77	-18.03	18.89	0.077	36.99	-18.10
707.50	10	256-QAM	V	179	128	12.44	4.62	14.91	0.031	34.77	-19.86	17.06	0.051	36.99	-19.93
711.00	10	QPSK	H	147	206	13.21	4.62	15.68	0.037	34.77	-19.09	17.83	0.061	36.99	-19.16
711.00	10 (WCP)	QPSK	V	177	223	12.11	4.62	14.58	0.029	34.77	-20.19	16.73	0.047	36.99	-20.26

Table 7-11. ERP Data (Band 12)


FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 402 of 494	

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15 MHz	π/2 BPSK	704.0	H	129.0	85.0	3.58	1 / 1	14.01	17.59	0.1	36.99	-19.40	15.44	0.035	34.77	-19.33
		707.5	H	129.0	98.0	3.72	1 / 1	13.69		0.1	36.99	-19.58	15.26	0.034	34.77	-19.51
		711.0	H	133.0	75.0	3.67	1 / 1	14.77		0.1	36.99	-18.55	16.29	0.043	34.77	-18.48
	QPSK	704.0	H	129.0	85.0	3.58	1 / 1	14.12	17.70	0.059	36.99	-19.29	15.55	0.036	34.77	-19.22
		707.5	H	129.0	98.0	3.72	1 / 1	13.86	17.58	0.057	36.99	-19.41	15.43	0.035	34.77	-19.34
		711.0	H	133.0	75.0	3.67	1 / 1	14.81	18.48	0.070	36.99	-18.51	16.33	0.043	34.77	-18.44
		711.0	H	133.0	75.0	3.67	1 / 1	13.63	17.30	0.054	36.99	-19.69	15.15	0.033	34.77	-19.62
	16-QAM	711.0	H	133.0	75.0	3.67	1 / 1	12.69	16.36	0.043	36.99	-20.63	14.21	0.026	34.77	-20.56
	256-QAM	711.0	H	133.0	75.0	3.67	1 / 1	14.70	18.37	0.069	36.99	-18.62	16.22	0.042	34.77	-18.55
	10 MHz	π/2 BPSK	704.0	H	129.0	85.0	3.58	1 / 1	13.89	17.47	0.1	36.99	-19.52	15.32	0.034	34.77
707.5			H	129.0	98.0	3.72	1 / 1	13.87	0.1		36.99	-19.40	15.44	0.035	34.77	-19.33
711.0			H	133.0	75.0	3.67	1 / 1	14.16	0.1		36.99	-19.16	15.68	0.037	34.77	-19.09
QPSK		701.5	H	129.0	85.0	3.58	1 / 1	13.87	17.45	0.056	36.99	-19.54	15.30	0.034	34.77	-19.47
		707.5	H	129.0	98.0	3.72	1 / 1	13.85	17.57	0.057	36.99	-19.42	15.42	0.035	34.77	-19.35
		713.5	H	133.0	75.0	3.67	1 / 1	14.25	17.92	0.062	36.99	-19.07	15.77	0.038	34.77	-19.00
		701.5	H	129.0	85.0	3.58	1 / 1	13.66	17.24	0.053	36.99	-19.75	15.09	0.032	34.77	-19.68
16-QAM		713.5	H	133.0	75.0	3.67	1 / 1	11.93	15.60	0.036	36.99	-21.39	13.45	0.022	34.77	-21.32
256-QAM		713.5	H	133.0	75.0	3.67	1 / 1	14.48	18.15	0.065	36.99	-18.84	16.00	0.040	34.77	-18.77
5 MHz		π/2 BPSK	704.0	H	129.0	85.0	3.58	1 / 1	14.36	17.94	0.1	36.99	-19.05	15.79	0.038	34.77
	707.5		H	129.0	98.0	3.72	1 / 1	14.07	0.1		36.99	-19.20	15.64	0.037	34.77	-19.13
	711.0		H	133.0	75.0	3.67	1 / 1	14.35	0.1		36.99	-18.97	15.87	0.039	34.77	-18.90
	QPSK	700.5	H	129.0	85.0	3.58	1 / 1	13.83	17.41	0.055	36.99	-19.58	15.26	0.034	34.77	-19.51
		707.5	H	129.0	98.0	3.72	1 / 1	13.71	17.43	0.055	36.99	-19.56	15.28	0.034	34.77	-19.49
		714.5	H	133.0	75.0	3.67	1 / 1	14.42	18.09	0.064	36.99	-18.90	15.94	0.039	34.77	-18.83
		714.5	H	133.0	75.0	3.67	1 / 1	13.64	17.31	0.054	36.99	-19.68	15.16	0.033	34.77	-19.61
	16-QAM	700.5	H	129.0	85.0	3.58	1 / 1	12.60	16.18	0.042	36.99	-20.81	14.03	0.025	34.77	-20.74
	256-QAM	714.5	H	133.0	75.0	3.67	1 / 1	14.64	18.31	0.068	36.99	-18.68	16.16	0.041	34.77	-18.61
	Opposite Pol.	711.0	V	241.0	116.0	3.67	1 / 1	12.50	16.17	0.041	36.99	-20.82	14.02	0.025	34.77	-20.75
WCP	711.0	V	241.0	214.0	3.67	1 / 1	11.60	15.27	0.034	36.99	-21.72	13.12	0.020	34.77	-21.65	

Table 7-12. ERP Data (Band n12)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
779.50	5	QPSK	H	231	72	16.86	5.82	20.53	0.113	34.77	-14.25	22.68	0.185	36.99	-14.31
782.00	5	QPSK	H	237	79	16.98	5.89	20.72	0.118	34.77	-14.05	22.87	0.194	36.99	-14.12
784.50	5	QPSK	H	229	83	16.69	5.92	20.46	0.111	34.77	-14.31	22.61	0.182	36.99	-14.38
782.00	5	16-QAM	H	237	79	16.08	5.89	19.82	0.096	34.77	-14.95	21.97	0.158	36.99	-15.02
779.50	5	64-QAM	H	231	72	14.85	5.82	18.52	0.071	34.77	-16.26	20.67	0.117	36.99	-16.32
782.00	5	256-QAM	H	237	79	12.82	5.89	16.56	0.045	34.77	-18.21	18.71	0.074	36.99	-18.28
782.00	10	QPSK	H	237	79	16.79	5.89	20.53	0.113	34.77	-14.24	22.68	0.185	36.99	-14.31
782.00	10	16-QAM	H	237	79	15.82	5.89	19.56	0.090	34.77	-15.21	21.71	0.148	36.99	-15.28
782.00	10	64-QAM	H	237	79	13.99	5.89	17.73	0.059	34.77	-17.04	19.88	0.097	36.99	-17.11
782.00	10	256-QAM	H	237	79	11.91	5.89	15.65	0.037	34.77	-19.12	17.80	0.060	36.99	-19.19
782.00	5	QPSK	V	145	128	15.62	5.89	19.36	0.086	34.77	-15.41	21.51	0.142	36.99	-15.48
782.00	5 (WCP)	QPSK	V	156	201	12.93	5.89	16.67	0.046	34.77	-18.10	18.82	0.076	36.99	-18.17

Table 7-13. ERP Data (Band 13)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 403 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	V	145	125	13.46	6.36	17.67	0.058	38.45	-20.78	19.82	0.096	40.61	-20.79
836.50	1.4	QPSK	V	143	130	13.64	6.38	17.87	0.061	38.45	-20.58	20.02	0.100	40.61	-20.59
848.30	1.4	QPSK	V	143	116	12.91	6.50	17.26	0.053	38.45	-21.19	19.41	0.087	40.61	-21.20
836.50	1.4	16-QAM	V	143	130	12.73	6.38	16.96	0.050	38.45	-21.49	19.11	0.081	40.61	-21.50
836.50	1.4	64-QAM	V	143	130	11.97	6.38	16.20	0.042	38.45	-22.25	18.35	0.068	40.61	-22.26
836.50	1.4	256-QAM	V	143	130	10.39	6.38	14.62	0.029	38.45	-23.83	16.77	0.048	40.61	-23.84
825.50	3	QPSK	V	145	125	13.35	6.36	17.56	0.057	38.45	-20.89	19.71	0.094	40.61	-20.90
836.50	3	QPSK	V	143	130	13.61	6.38	17.84	0.061	38.45	-20.61	19.99	0.100	40.61	-20.62
847.50	3	QPSK	V	143	116	13.26	6.49	17.60	0.058	38.45	-20.85	19.75	0.094	40.61	-20.86
836.50	3	16-QAM	V	143	130	12.76	6.38	16.99	0.050	38.45	-21.46	19.14	0.082	40.61	-21.47
836.50	3	64-QAM	V	143	130	11.75	6.38	15.98	0.040	38.45	-22.47	18.13	0.065	40.61	-22.48
836.50	3	256-QAM	V	143	130	10.95	6.38	15.18	0.033	38.45	-23.27	17.33	0.054	40.61	-23.28
826.50	5	QPSK	V	145	125	13.38	6.37	17.60	0.058	38.45	-20.85	19.75	0.094	40.61	-20.86
836.50	5	QPSK	V	143	130	13.64	6.38	17.87	0.061	38.45	-20.58	20.02	0.100	40.61	-20.59
846.50	5	QPSK	V	143	116	13.31	6.48	17.64	0.058	38.45	-20.81	19.79	0.095	40.61	-20.82
836.50	5	16-QAM	V	143	130	12.81	6.38	17.04	0.051	38.45	-21.41	19.19	0.083	40.61	-21.42
836.50	5	64-QAM	V	143	130	11.85	6.38	16.08	0.041	38.45	-22.37	18.23	0.067	40.61	-22.38
836.50	5	256-QAM	V	143	130	10.34	6.38	14.57	0.029	38.45	-23.88	16.72	0.047	40.61	-23.89
829.00	10	QPSK	V	145	125	13.65	6.40	17.90	0.062	38.45	-20.55	20.05	0.101	40.61	-20.56
836.50	10	QPSK	V	143	130	13.76	6.38	17.99	0.063	38.45	-20.46	20.14	0.103	40.61	-20.47
844.00	10	QPSK	V	143	116	13.70	6.46	18.01	0.063	38.45	-20.44	20.16	0.104	40.61	-20.45
836.50	10	16-QAM	V	143	130	12.98	6.38	17.21	0.053	38.45	-21.24	19.36	0.086	40.61	-21.25
836.50	10	64-QAM	V	143	130	12.22	6.38	16.45	0.044	38.45	-22.00	18.60	0.072	40.61	-22.01
836.50	10	256-QAM	V	143	130	10.90	6.38	15.13	0.033	38.45	-23.32	17.28	0.053	40.61	-23.33

Table 7-14. ERP Data (Band 26/5)


Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
831.50	15	QPSK	V	145	125	13.53	6.43	17.81	0.060	38.45	-20.64	19.96	0.099	40.61	-20.65
836.50	15	QPSK	V	143	130	13.45	6.38	17.68	0.059	38.45	-20.77	19.83	0.096	40.61	-20.78
841.50	15	QPSK	V	143	116	13.77	6.43	18.05	0.064	38.45	-20.40	20.20	0.105	40.61	-20.41
841.50	15	16-QAM	V	143	116	13.01	6.43	17.29	0.054	38.45	-21.16	19.44	0.088	40.61	-21.17
841.50	15	64-QAM	V	143	116	11.88	6.43	16.16	0.041	38.45	-22.29	18.31	0.068	40.61	-22.30
841.50	15	256-QAM	V	143	116	10.52	6.43	14.80	0.030	38.45	-23.65	16.95	0.050	40.61	-23.66
841.50	15	QPSK	H	101	66	13.62	6.38	17.85	0.061	38.45	-20.60	20.00	0.100	40.61	-20.61
841.50	15 (WCP)	QPSK	V	133	273	11.21	6.38	15.44	0.035	38.45	-23.01	17.59	0.057	40.61	-23.02

Table 7-15. ERP Data (Band 26)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 404 of 494	



Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]	
20 MHz	π/2 BPSK	834.0	V	136.0	6.35	1 / 0	13.72	17.92	0.062	38.45	-20.53	20.07	0.102	40.61	-20.53	
		836.5	V	140.0	6.38	1 / 0	13.82	18.05	0.064	38.45	-20.40	20.20	0.105	40.61	-20.41	
		839.0	V	142.0	6.40	1 / 0	13.58	17.83	0.061	38.45	-20.62	19.98	0.100	40.61	-20.62	
	QPSK	834.0	V	136.0	6.35	1 / 0	14.08	18.28	0.067	38.45	-20.17	20.43	0.110	40.61	-20.17	
		836.5	V	140.0	6.38	1 / 0	14.12	18.35	0.068	38.45	-20.10	20.50	0.112	40.61	-20.11	
		839.0	V	142.0	6.40	1 / 0	13.50	17.75	0.060	38.45	-20.70	19.90	0.098	40.61	-20.70	
		16-QAM	836.5	V	140.0	6.38	1 / 0	13.54	17.77	0.060	38.45	-20.68	19.92	0.098	40.61	-20.69
		64-QAM	836.5	V	140.0	6.38	1 / 0	11.98	16.21	0.042	38.45	-22.24	18.36	0.069	40.61	-22.25
		256-QAM	836.5	V	140.0	6.38	1 / 0	10.14	14.37	0.027	38.45	-24.08	16.52	0.045	40.61	-24.09
15 MHz	π/2 BPSK	831.5	V	136.0	6.35	1 / 0	9.19	15.54	0.036	38.45	-22.91	15.54	0.036	40.61	-25.06	
		836.5	V	140.0	6.38	1 / 0	9.29	15.67	0.037	38.45	-22.78	15.67	0.037	40.61	-24.94	
		841.5	V	142.0	6.40	1 / 0	9.05	15.45	0.035	38.45	-23.00	15.45	0.035	40.61	-25.15	
	QPSK	831.5	V	136.0	6.35	1 / 0	9.45	15.80	0.038	38.45	-22.65	15.80	0.038	40.61	-24.80	
		836.5	V	140.0	6.38	1 / 0	9.49	15.87	0.039	38.45	-22.58	15.87	0.039	40.61	-24.74	
		841.5	V	142.0	6.40	1 / 0	8.87	15.27	0.034	38.45	-23.18	15.27	0.034	40.61	-25.33	
		16-QAM	836.5	V	140.0	6.38	1 / 0	9.21	15.59	0.036	38.45	-22.86	15.59	0.036	40.61	-25.02
		64-QAM	836.5	V	140.0	6.38	1 / 0	7.65	14.03	0.025	38.45	-24.42	14.03	0.025	40.61	-26.58
		256-QAM	836.5	V	140.0	6.38	1 / 0	5.81	12.19	0.017	38.45	-26.26	12.19	0.017	40.61	-28.42
10 MHz	π/2 BPSK	829.0	V	136.0	6.35	1 / 0	9.34	15.69	0.037	38.45	-22.76	15.69	0.037	40.61	-24.91	
		836.5	V	140.0	6.38	1 / 0	9.44	15.82	0.038	38.45	-22.63	15.82	0.038	40.61	-24.79	
		844.0	V	142.0	6.40	1 / 0	9.20	15.60	0.036	38.45	-22.85	15.60	0.036	40.61	-25.00	
	QPSK	829.0	V	136.0	6.35	1 / 0	9.54	15.89	0.039	38.45	-22.56	15.89	0.039	40.61	-24.71	
		836.5	V	140.0	6.38	1 / 0	9.58	15.96	0.039	38.45	-22.49	15.96	0.039	40.61	-24.65	
		844.0	V	142.0	6.40	1 / 0	8.96	15.36	0.034	38.45	-23.09	15.36	0.034	40.61	-25.24	
		16-QAM	836.5	V	140.0	6.38	1 / 0	9.65	16.03	0.040	38.45	-22.42	16.03	0.040	40.61	-24.58
		64-QAM	836.5	V	140.0	6.38	1 / 0	8.09	14.47	0.028	38.45	-23.98	14.47	0.028	40.61	-26.14
		256-QAM	836.5	V	140.0	6.38	1 / 0	6.25	12.63	0.018	38.45	-25.82	12.63	0.018	40.61	-27.98
5 MHz	π/2 BPSK	829.0	V	136.0	6.35	1 / 0	9.23	15.58	0.036	38.45	-22.87	15.58	0.036	40.61	-25.02	
		836.5	V	140.0	6.38	1 / 0	9.33	15.71	0.037	38.45	-22.74	15.71	0.037	40.61	-24.90	
		844.0	V	142.0	6.40	1 / 0	9.09	15.49	0.035	38.45	-22.96	15.49	0.035	40.61	-25.11	
	QPSK	829.0	V	136.0	6.35	1 / 0	9.33	15.68	0.037	38.45	-22.77	15.68	0.037	40.61	-24.92	
		836.5	V	140.0	6.38	1 / 0	9.49	15.87	0.039	38.45	-22.58	15.87	0.039	40.61	-24.74	
		844.0	V	142.0	6.40	1 / 0	8.85	15.25	0.034	38.45	-23.20	15.25	0.034	40.61	-25.35	
		16-QAM	836.5	V	140.0	6.38	1 / 0	9.75	16.13	0.041	38.45	-22.32	16.13	0.041	40.61	-24.48
		64-QAM	836.5	V	140.0	6.38	1 / 0	8.19	14.57	0.029	38.45	-23.88	14.57	0.029	40.61	-26.04
		256-QAM	836.5	V	140.0	6.38	1 / 0	6.04	12.42	0.017	38.45	-26.03	12.42	0.017	40.61	-28.19
QPSK (CP-OFDM)	836.5	V	132.0	6.38	1 / 0	11.25	17.63	0.058	38.45	-20.82	19.78	0.095	40.61	-20.83		
QPSK (Opposite Pol.)	836.5	H	144.0	6.38	1 / 0	9.12	15.50	0.035	38.45	-22.95	17.65	0.058	40.61	-22.96		

Table 7-16. ERP Data (Band n5)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 405 of 494	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	H	130	150	13.18	9.47	22.65	0.184	30.00	-7.35
1745.00	1.4	QPSK	H	128	164	13.39	9.26	22.65	0.184	30.00	-7.35
1779.30	1.4	QPSK	H	122	160	14.24	9.29	23.53	0.225	30.00	-6.47
1745.00	1.4	16-QAM	H	128	164	12.86	9.26	22.12	0.163	30.00	-7.88
1710.70	1.4	64-QAM	H	130	150	12.21	9.47	21.68	0.147	30.00	-8.32
1710.70	1.4	256-QAM	H	130	150	9.60	9.47	19.07	0.081	30.00	-10.93
1711.50	3	QPSK	H	140	160	14.29	9.47	23.76	0.238	30.00	-6.24
1745.00	3	QPSK	H	128	147	14.27	9.26	23.53	0.225	30.00	-6.47
1778.50	3	QPSK	H	130	157	14.16	9.28	23.44	0.221	30.00	-6.56
1745.00	3	16-QAM	H	128	147	12.95	9.26	22.21	0.166	30.00	-7.79
1711.50	3	64-QAM	H	140	160	12.34	9.47	21.81	0.152	30.00	-8.19
1711.50	3	256-QAM	H	140	160	9.67	9.47	19.14	0.082	30.00	-10.86
1712.50	5	QPSK	H	130	111	14.06	9.46	23.52	0.225	30.00	-6.48
1745.00	5	QPSK	H	128	127	14.32	9.26	23.58	0.228	30.00	-6.42
1777.50	5	QPSK	H	131	160	14.25	9.28	23.53	0.225	30.00	-6.47
1712.50	5	16-QAM	H	130	111	13.06	9.46	22.52	0.179	30.00	-7.48
1712.50	5	64-QAM	H	130	111	12.29	9.46	21.75	0.150	30.00	-8.25
1712.50	5	256-QAM	H	130	111	9.70	9.46	19.16	0.082	30.00	-10.84
1715.00	10	QPSK	H	128	163	14.17	9.44	23.61	0.230	30.00	-6.39
1745.00	10	QPSK	H	131	160	14.34	9.26	23.60	0.229	30.00	-6.40
1775.00	10	QPSK	H	124	170	14.46	9.28	23.74	0.237	30.00	-6.26
1775.00	10	16-QAM	H	124	170	13.10	9.28	22.38	0.173	30.00	-7.62
1715.00	10	64-QAM	H	128	163	12.21	9.44	21.65	0.146	30.00	-8.35
1715.00	10	256-QAM	H	128	163	9.70	9.44	19.14	0.082	30.00	-10.86
1717.50	15	QPSK	H	141	162	14.31	9.43	23.74	0.237	30.00	-6.26
1745.00	15	QPSK	H	128	154	14.41	9.26	23.67	0.233	30.00	-6.33
1772.50	15	QPSK	H	131	152	14.36	9.27	23.63	0.231	30.00	-6.37
1772.50	15	16-QAM	H	131	152	12.98	9.27	22.25	0.168	30.00	-7.75
1717.50	15	64-QAM	H	141	162	12.51	9.43	21.94	0.156	30.00	-8.06
1717.50	15	256-QAM	H	141	162	9.81	9.43	19.24	0.084	30.00	-10.76
1720.00	20	QPSK	H	133	157	14.37	9.41	23.78	0.239	30.00	-6.22
1745.00	20	QPSK	H	128	157	14.47	9.26	23.73	0.236	30.00	-6.27
1770.00	20	QPSK	H	122	167	12.45	9.27	21.72	0.149	30.00	-8.28
1720.00	20	16-QAM	H	133	157	13.59	9.41	23.00	0.200	30.00	-7.00
1720.00	20	64-QAM	H	133	157	12.65	9.41	22.06	0.161	30.00	-7.94
1720.00	20	256-QAM	H	133	157	9.75	9.41	19.16	0.082	30.00	-10.84
1720.00	20	QPSK	V	137	343	13.75	9.41	23.16	0.207	30.00	-6.84
1720.00	20 (WCP)	QPSK	H	295	359	12.67	9.41	22.08	0.162	30.00	-7.92

Table 7-17. EIRP Data (Band 66/4)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 406 of 494



Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	π/2 BPSK	1720.0	V	144.0	141.0	9.31	1 / 50	15.13	24.44	0.278	30.00	-5.56
		1745.0	V	133.0	150.0	9.14	1 / 50	13.64	22.78	0.190	30.00	-7.22
		1770.0	V	139.0	29.0	9.17	1 / 50	12.37	21.54	0.143	30.00	-8.46
	QPSK	1720.0	V	144.0	141.0	9.31	1 / 50	15.33	24.64	0.291	30.00	-5.36
		1745.0	V	133.0	150.0	9.14	1 / 50	14.08	23.22	0.210	30.00	-6.78
		1770.0	V	139.0	29.0	9.17	1 / 50	12.49	21.66	0.147	30.00	-8.34
	16-QAM	1720.0	V	144.0	141.0	9.31	1 / 50	14.40	23.71	0.235	30.00	-6.29
64-QAM	1720.0	V	144.0	141.0	9.31	1 / 50	12.86	22.17	0.165	30.00	-7.83	
256-QAM	1720.0	V	144.0	141.0	9.31	1 / 50	11.35	20.66	0.116	30.00	-9.34	
15 MHz	π/2 BPSK	1717.5	V	144.0	141.0	9.33	1/1	15.20	24.53	0.284	30.00	-5.47
		1745.0	V	133.0	150.0	9.14	1/1	13.64	22.78	0.190	30.00	-7.22
		1772.5	V	139.0	29.0	9.18	1/1	12.56	21.74	0.149	30.00	-8.26
	QPSK	1717.5	V	144.0	141.0	9.33	1/1	15.24	24.57	0.287	30.00	-5.43
		1745.0	V	133.0	150.0	9.14	1/1	14.00	23.14	0.206	30.00	-6.86
		1772.5	V	139.0	29.0	9.18	1/1	12.38	21.56	0.143	30.00	-8.44
	16-QAM	1717.5	V	144.0	141.0	9.33	1/1	14.64	23.97	0.250	30.00	-6.03
64-QAM	1717.5	V	144.0	141.0	9.33	1/1	13.49	22.82	0.192	30.00	-7.18	
256-QAM	1717.5	V	144.0	141.0	9.33	1/1	10.90	20.23	0.106	30.00	-9.77	
10 MHz	π/2 BPSK	1715.0	V	144.0	141.0	9.35	1/26	15.35	24.70	0.295	30.00	-5.30
		1745.0	V	133.0	150.0	9.14	1/26	13.84	22.98	0.199	30.00	-7.02
		1775.0	V	139.0	29.0	9.18	1/26	12.73	21.92	0.156	30.00	-8.08
	QPSK	1715.0	V	144.0	141.0	9.35	1/26	15.21	24.56	0.286	30.00	-5.44
		1745.0	V	133.0	150.0	9.14	1/26	14.15	23.29	0.213	30.00	-6.71
		1775.0	V	139.0	29.0	9.18	1/26	12.44	21.63	0.146	30.00	-8.37
	16-QAM	1715.0	V	144.0	141.0	9.35	1/26	14.59	23.94	0.248	30.00	-6.06
64-QAM	1715.0	V	144.0	141.0	9.35	1/26	13.44	22.79	0.190	30.00	-7.21	
256-QAM	1715.0	V	144.0	141.0	9.35	1/26	10.65	20.00	0.100	30.00	-10.00	
5 MHz	π/2 BPSK	1712.5	V	144.0	141.0	9.37	1/13	15.08	24.44	0.278	30.00	-5.56
		1745.0	V	133.0	150.0	9.14	1/13	13.80	22.94	0.197	30.00	-7.06
		1777.5	V	139.0	29.0	9.19	1/23	12.52	21.71	0.148	30.00	-8.29
	QPSK	1712.5	V	144.0	141.0	9.37	1/13	15.24	24.60	0.289	30.00	-5.40
		1745.0	V	133.0	150.0	9.14	1/13	14.10	23.24	0.211	30.00	-6.76
		1777.5	V	139.0	29.0	9.19	1/23	12.50	21.69	0.148	30.00	-8.31
	16-QAM	1712.5	V	144.0	141.0	9.37	1/13	14.52	23.88	0.244	30.00	-6.12
64-QAM	1712.5	V	144.0	141.0	9.37	1/13	13.37	22.73	0.188	30.00	-7.27	
256-QAM	1712.5	V	144.0	141.0	9.37	1/13	10.69	20.05	0.101	30.00	-9.95	
	QPSK (CP-OFDM)	1720.0	V	144.0	141.0	9.31	1 / 50	13.04	22.35	0.172	30.00	-7.65
	QPSK (Opposite Pol.)	1720.0	H	222.0	246.0	9.31	1 / 50	13.69	23.00	0.200	30.00	-7.00
	QPSK (WCP)	1720.0	V	210.0	209.0	9.31	1 / 50	11.32	20.63	0.116	30.00	-9.37

Table 7-18. EIRP Data (Band n66)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 407 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	H	121	11	13.84	9.51	23.35	0.216	33.01	-9.66
1882.50	1.4	QPSK	H	146	134	13.50	9.96	23.46	0.222	33.01	-9.55
1914.30	1.4	QPSK	H	115	321	14.07	10.32	24.39	0.275	33.01	-8.62
1914.30	1.4	16-QAM	H	115	321	13.13	10.32	23.45	0.221	33.01	-9.56
1914.30	1.4	64-QAM	H	115	321	12.07	10.32	22.39	0.173	33.01	-10.62
1914.30	1.4	256-QAM	H	115	321	9.15	10.32	19.47	0.089	33.01	-13.54
1851.50	3	QPSK	H	121	21	13.83	9.52	23.35	0.216	33.01	-9.66
1882.50	3	QPSK	H	121	11	13.60	9.96	23.56	0.227	33.01	-9.45
1913.50	3	QPSK	H	111	321	14.10	10.31	24.41	0.276	33.01	-8.60
1913.50	3	16-QAM	H	111	321	13.14	10.31	23.45	0.221	33.01	-9.56
1913.50	3	64-QAM	H	111	321	12.21	10.31	22.52	0.179	33.01	-10.49
1913.50	3	256-QAM	H	111	321	9.18	10.31	19.49	0.089	33.01	-13.52
1852.50	5	QPSK	H	117	24	13.80	9.54	23.34	0.216	33.01	-9.67
1882.50	5	QPSK	H	159	26	13.64	9.96	23.60	0.229	33.01	-9.41
1912.50	5	QPSK	H	111	5	14.07	10.30	24.37	0.274	33.01	-8.64
1912.50	5	16-QAM	H	111	5	13.19	10.30	23.49	0.223	33.01	-9.52
1912.50	5	64-QAM	H	111	5	12.18	10.30	22.48	0.177	33.01	-10.53
1912.50	5	256-QAM	H	111	5	9.17	10.30	19.47	0.089	33.01	-13.54
1855.00	10	QPSK	H	116	10	13.81	9.57	23.38	0.218	33.01	-9.63
1882.50	10	QPSK	H	109	12	13.62	9.96	23.58	0.228	33.01	-9.43
1910.00	10	QPSK	H	113	344	14.08	10.28	24.36	0.273	33.01	-8.65
1910.00	10	16-QAM	H	113	344	13.48	10.28	23.76	0.238	33.01	-9.25
1910.00	10	64-QAM	H	113	344	12.34	10.28	22.62	0.183	33.01	-10.39
1910.00	10	256-QAM	H	113	344	9.29	10.28	19.57	0.091	33.01	-13.44
1857.50	15	QPSK	H	116	10	13.80	9.61	23.41	0.219	33.01	-9.60
1882.50	15	QPSK	H	109	12	13.50	9.96	23.46	0.222	33.01	-9.55
1907.50	15	QPSK	H	113	344	14.13	10.26	24.39	0.275	33.01	-8.62
1907.50	15	16-QAM	H	113	344	13.55	10.26	23.81	0.240	33.01	-9.20
1907.50	15	64-QAM	H	113	344	12.39	10.26	22.65	0.184	33.01	-10.36
1907.50	15	256-QAM	H	113	344	9.28	10.26	19.54	0.090	33.01	-13.47
1860.00	20	QPSK	H	116	10	13.94	9.64	23.58	0.228	33.01	-9.43
1882.50	20	QPSK	H	109	12	13.74	9.96	23.70	0.234	33.01	-9.31
1905.00	20	QPSK	H	113	344	14.40	10.24	24.64	0.291	33.01	-8.37
1860.00	20	16-QAM	H	116	10	11.67	9.64	21.31	0.135	33.01	-11.70
1860.00	20	64-QAM	H	116	10	11.01	9.64	20.65	0.116	33.01	-12.36
1860.00	20	256-QAM	H	116	10	9.21	9.64	18.85	0.077	33.01	-14.16
1905.00	20	QPSK	V	204	119	11.94	9.96	21.90	0.155	33.01	-11.11
1905.00	20 (WCP)	QPSK	H	123	278	12.41	9.96	22.37	0.173	33.01	-10.64

Table 7-19. EIRP Data (Band 25/2)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 408 of 494

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	π/2 BPSK	1860.0	H	158.0	162.0	9.98	1 / 25	12.77	22.75	0.188	33.01	-10.26
		1882.5	H	155.0	157.0	10.15	1 / 25	13.28	23.43	0.220	33.01	-9.58
		1905.0	H	147.0	196.0	10.31	1 / 25	12.79	23.10	0.204	33.01	-9.91
	QPSK	1860.0	H	158.0	162.0	9.98	1 / 25	12.21	22.19	0.166	33.01	-10.82
		1882.5	H	155.0	157.0	10.15	1 / 25	13.67	23.82	0.241	33.01	-9.19
		1905.0	H	147.0	196.0	10.31	1 / 25	13.18	23.49	0.224	33.01	-9.52
	16-QAM	1882.5	H	155.0	157.0	10.15	1 / 25	12.46	22.61	0.182	33.01	-10.40
64-QAM	1882.5	H	155.0	157.0	10.15	1 / 25	10.75	20.90	0.123	33.01	-12.11	
256-QAM	1882.5	H	155.0	157.0	10.15	1 / 25	8.86	19.01	0.080	33.01	-14.00	
15 MHz	π/2 BPSK	1857.5	H	158.0	162.0	9.98	1 / 12	12.71	22.69	0.186	33.01	-10.32
		1882.5	H	155.0	157.0	10.15	1 / 12	13.19	23.34	0.216	33.01	-9.67
		1907.5	H	147.0	196.0	10.31	1 / 12	12.76	23.07	0.203	33.01	-9.94
	QPSK	1857.5	H	158.0	162.0	9.98	1 / 12	12.13	22.11	0.163	33.01	-10.90
		1882.5	H	155.0	157.0	10.15	1 / 12	13.63	23.78	0.239	33.01	-9.23
		1907.5	H	147.0	196.0	10.31	1 / 12	13.24	23.55	0.227	33.01	-9.46
	16-QAM	1882.5	H	155.0	157.0	10.15	1 / 12	12.74	22.89	0.195	33.01	-10.12
64-QAM	1882.5	H	155.0	157.0	10.15	1 / 12	10.34	20.49	0.112	33.01	-12.52	
256-QAM	1882.5	H	155.0	157.0	10.15	1 / 12	8.74	18.89	0.077	33.01	-14.12	
10 MHz	π/2 BPSK	1855.0	H	158.0	162.0	9.98	1 / 7	13.04	23.02	0.200	33.01	-9.99
		1882.5	H	155.0	157.0	10.15	1 / 7	13.28	23.43	0.220	33.01	-9.58
		1910.0	H	147.0	196.0	10.31	1 / 7	12.85	23.16	0.207	33.01	-9.85
	QPSK	1855.0	H	158.0	162.0	9.98	1 / 7	12.47	22.45	0.176	33.01	-10.56
		1882.5	H	155.0	157.0	10.15	1 / 7	13.57	23.72	0.236	33.01	-9.29
		1910.0	H	147.0	196.0	10.31	1 / 7	13.09	23.40	0.219	33.01	-9.61
	16-QAM	1882.5	H	155.0	157.0	10.15	1 / 7	12.65	22.80	0.191	33.01	-10.21
64-QAM	1882.5	H	155.0	157.0	10.15	1 / 7	10.25	20.40	0.110	33.01	-12.61	
256-QAM	1882.5	H	155.0	157.0	10.15	1 / 7	8.65	18.80	0.076	33.01	-14.21	
5 MHz	π/2 BPSK	1852.5	H	158.0	162.0	9.98	1 / 3	12.69	22.67	0.185	33.01	-10.34
		1882.5	H	155.0	157.0	10.15	1 / 3	12.95	23.10	0.204	33.01	-9.91
		1912.5	H	147.0	196.0	10.31	1 / 3	12.47	22.78	0.190	33.01	-10.23
	QPSK	1852.5	H	158.0	162.0	9.98	1 / 3	12.03	22.01	0.159	33.01	-11.00
		1882.5	H	155.0	157.0	10.15	1 / 3	13.55	23.70	0.235	33.01	-9.31
		1912.5	H	147.0	196.0	10.31	1 / 3	12.57	22.88	0.194	33.01	-10.13
	16-QAM	1882.5	H	155.0	157.0	10.15	1 / 3	12.13	22.28	0.169	33.01	-10.73
64-QAM	1882.5	H	155.0	157.0	10.15	1 / 3	9.73	19.88	0.097	33.01	-13.13	
256-QAM	1882.5	H	155.0	157.0	10.15	1 / 3	8.13	18.28	0.067	33.01	-14.73	
	QPSK (CP-OFDM)	1902.5	H	158.0	163.0	10.31	1 / 12	12.74	23.05	0.202	33.01	-9.96
	QPSK (Opposite Pol.)	1902.5	V	252.0	141.0	10.31	1 / 12	9.77	20.08	0.102	33.01	-12.93

Table 7-20. EIRP Data (Band n25/2)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 409 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2307.50	5	QPSK	V	151	254	12.53	10.26	22.79	0.190	23.98	-1.19
2312.50	5	QPSK	V	145	248	12.14	10.24	22.38	0.173	23.98	-1.60
2312.50	5	16-QAM	V	145	248	11.48	10.24	21.72	0.149	23.98	-2.26
2307.50	5	64-QAM	V	151	254	9.66	10.26	19.92	0.098	23.98	-4.06
2307.50	5	256-QAM	V	151	254	8.12	10.26	18.38	0.069	23.98	-5.60
2310.00	10	QPSK	V	149	244	12.66	10.25	22.91	0.195	23.98	-1.07
2310.00	10	16-QAM	V	149	244	11.96	10.25	22.21	0.166	23.98	-1.77
2310.00	10	64-QAM	V	149	244	10.14	10.25	20.39	0.109	23.98	-3.59
2310.00	10	256-QAM	V	149	244	7.80	10.25	18.05	0.064	23.98	-5.93
2310.00	10	QPSK	H	147	333	10.49	10.25	20.74	0.119	23.98	-3.24
2310.00	10 (WCP)	QPSK	V	234	278	10.16	10.25	20.41	0.110	23.98	-3.57

Table 7-21. EIRP Data (Band 30)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 410 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2502.50	5	QPSK	H	149	322	13.25	9.46	22.71	0.187	33.01	-10.30
2535.00	5	QPSK	H	145	320	13.91	9.42	23.33	0.215	33.01	-9.68
2567.50	5	QPSK	H	141	316	13.12	9.48	22.60	0.182	33.01	-10.41
2502.50	5	16-QAM	H	149	322	13.67	9.46	23.13	0.206	33.01	-9.88
2535.00	5	64-QAM	H	145	320	12.24	9.42	21.66	0.147	33.01	-11.35
2502.50	5	256-QAM	H	149	322	9.57	9.46	19.03	0.080	33.01	-13.98
2505.00	10	QPSK	H	149	322	13.95	9.45	23.40	0.219	33.01	-9.61
2535.00	10	QPSK	H	145	320	14.05	9.42	23.47	0.222	33.01	-9.54
2565.00	10	QPSK	H	141	316	12.75	9.47	22.22	0.167	33.01	-10.79
2505.00	10	16-QAM	H	149	322	13.68	9.45	23.13	0.206	33.01	-9.88
2505.00	10	64-QAM	H	149	322	12.41	9.45	21.86	0.153	33.01	-11.15
2505.00	10	256-QAM	H	149	322	9.53	9.45	18.98	0.079	33.01	-14.03
2507.50	15	QPSK	H	149	322	14.01	9.45	23.46	0.222	33.01	-9.55
2535.00	15	QPSK	H	145	320	13.91	9.42	23.33	0.215	33.01	-9.68
2562.50	15	QPSK	H	141	316	12.65	9.46	22.11	0.163	33.01	-10.90
2535.00	15	16-QAM	H	145	320	13.49	9.42	22.91	0.195	33.01	-10.10
2535.00	15	64-QAM	H	145	320	12.31	9.42	21.73	0.149	33.01	-11.28
2507.50	15	256-QAM	H	149	322	9.68	9.45	19.13	0.082	33.01	-13.88
2510.00	20	QPSK	H	149	322	14.14	9.45	23.59	0.228	33.01	-9.42
2535.00	20	QPSK	H	145	320	13.20	9.42	22.62	0.183	33.01	-10.39
2560.00	20	QPSK	H	141	316	12.72	9.45	22.17	0.165	33.01	-10.84
2510.00	20	16-QAM	H	149	322	13.45	9.45	22.90	0.195	33.01	-10.11
2510.00	20	64-QAM	H	149	322	11.67	9.45	21.12	0.129	33.01	-11.89
2510.00	20	256-QAM	H	149	322	9.21	9.45	18.66	0.073	33.01	-14.35
2510.00	20	QPSK	V	101	268	10.61	9.42	20.03	0.101	33.01	-12.98
2510.00	20 (WCP)	QPSK	V	125	271	7.27	9.42	16.69	0.047	33.01	-16.32

Table 7-22. EIRP Data (Band 7)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 411 of 494

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2498.50	5	QPSK	H	141	141	15.61	9.46	25.07	0.321	33.01	-7.94
2593.00	5	QPSK	H	110	136	16.49	9.58	26.07	0.405	33.01	-6.94
2687.50	5	QPSK	H	122	-133	15.23	9.85	25.08	0.322	33.01	-7.93
2593.00	5	16-QAM	H	110	136	16.07	9.58	25.65	0.367	33.01	-7.36
2593.00	5	64-QAM	H	110	136	15.15	9.58	24.73	0.297	33.01	-8.28
2593.00	5	256-QAM	H	110	136	11.98	9.58	21.56	0.143	33.01	-11.45
2501.00	10	QPSK	H	141	141	15.82	9.46	25.28	0.337	33.01	-7.73
2593.00	10	QPSK	H	110	136	16.62	9.58	26.20	0.417	33.01	-6.81
2685.00	10	QPSK	H	122	-133	15.30	9.85	25.15	0.327	33.01	-7.86
2593.00	10	16-QAM	H	110	136	16.11	9.58	25.69	0.371	33.01	-7.32
2593.00	10	64-QAM	H	110	136	15.06	9.58	24.64	0.291	33.01	-8.37
2593.00	10	256-QAM	H	110	136	12.08	9.58	21.66	0.147	33.01	-11.35
2503.50	15	QPSK	H	141	141	15.76	9.45	25.21	0.332	33.01	-7.80
2593.00	15	QPSK	H	110	136	16.54	9.58	26.12	0.409	33.01	-6.89
2682.50	15	QPSK	H	122	-133	15.11	9.86	24.97	0.314	33.01	-8.04
2593.00	15	16-QAM	H	110	136	15.62	9.58	25.20	0.331	33.01	-7.81
2593.00	15	64-QAM	H	110	136	14.70	9.58	24.28	0.268	33.01	-8.73
2593.00	15	256-QAM	H	110	136	11.86	9.58	21.44	0.139	33.01	-11.57
2506.00	20	QPSK	H	141	141	15.96	9.45	25.41	0.348	33.01	-7.60
2593.00	20	QPSK	H	110	136	16.64	9.58	26.22	0.419	33.01	-6.79
2680.00	20	QPSK	H	122	-133	15.26	9.86	25.12	0.325	33.01	-7.89
2593.00	20	16-QAM	H	110	136	15.58	9.58	25.16	0.328	33.01	-7.85
2593.00	20	64-QAM	H	110	136	14.46	9.58	24.04	0.254	33.01	-8.97
2593.00	20	256-QAM	H	110	136	13.16	9.58	22.74	0.188	33.01	-10.27
2593.00	20	QPSK	V	111	98	12.41	9.58	21.99	0.158	33.01	-11.02
2593.00	20 (WCP)	QPSK	H	222	48	16.64	9.58	24.60	0.288	33.01	-8.41

Table 7-23. EIRP Data (Band 41)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 412 of 494

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
100 MHz	π/2 BPSK	2546.0	H	151.0	312.0	9.41	1 / 273	13.58	22.99	0.199	33.01	-10.02
		2593.0	H	106.0	316.0	9.58	1 / 1	13.88	23.46	0.222	33.01	-9.55
		2640.0	H	116.0	319.0	9.87	1 / 137	13.22	23.09	0.204	33.01	-9.92
	QPSK	2546.0	H	151.0	312.0	9.41	1 / 273	13.20	22.61	0.183	33.01	-10.40
		2593.0	H	106.0	316.0	9.58	1 / 1	12.77	22.35	0.172	33.01	-10.66
		2640.0	H	116.0	319.0	9.87	1 / 137	12.58	22.45	0.176	33.01	-10.56
	16-QAM	2546.0	H	151.0	312.0	9.41	1 / 273	11.91	21.32	0.136	33.01	-11.69
64-QAM	2546.0	H	151.0	312.0	9.41	1 / 273	10.00	19.41	0.087	33.01	-13.60	
256-QAM	2640.0	H	116.0	319.0	9.87	1 / 137	9.04	18.91	0.078	33.01	-14.10	
90 MHz	π/2 BPSK	2541.0	H	151.0	312.0	9.42	1 / 123	13.65	23.06	0.202	33.01	-9.95
		2593.0	H	106.0	316.0	9.58	1 / 123	13.33	22.91	0.195	33.01	-10.10
		2645.0	H	116.0	319.0	9.90	1 / 123	13.35	23.25	0.211	33.01	-9.76
	QPSK	2541.0	H	151.0	312.0	9.42	1 / 123	13.40	22.81	0.191	33.01	-10.20
		2593.0	H	106.0	316.0	9.58	1 / 123	12.32	21.90	0.155	33.01	-11.11
		2645.0	H	116.0	319.0	9.90	1 / 123	11.37	21.27	0.134	33.01	-11.74
	16-QAM	2541.0	H	151.0	312.0	9.42	1 / 123	12.48	21.89	0.155	33.01	-11.12
64-QAM	2541.0	H	151.0	312.0	9.42	1 / 123	9.77	19.18	0.083	33.01	-13.83	
256-QAM	2645.0	H	116.0	319.0	9.90	1 / 123	8.02	17.92	0.062	33.01	-15.09	
80 MHz	π/2 BPSK	2536.0	H	151.0	312.0	9.42	1 / 108	13.66	23.08	0.203	33.01	-9.93
		2593.0	H	106.0	316.0	9.58	1 / 108	13.84	23.42	0.220	33.01	-9.59
		2650.0	H	116.0	319.0	9.93	1 / 108	13.14	23.07	0.203	33.01	-9.94
	QPSK	2536.0	H	151.0	312.0	9.42	1 / 108	13.93	23.35	0.216	33.01	-9.66
		2593.0	H	106.0	316.0	9.58	1 / 108	13.38	22.96	0.198	33.01	-10.05
		2650.0	H	116.0	319.0	9.93	1 / 108	13.43	23.36	0.217	33.01	-9.65
	16-QAM	2650.0	H	116.0	319.0	9.93	1 / 108	11.53	21.46	0.140	33.01	-11.55
64-QAM	2536.0	H	151.0	312.0	9.42	1 / 108	8.80	18.22	0.066	33.01	-14.79	
256-QAM	2536.0	H	151.0	312.0	9.42	1 / 108	6.30	15.72	0.037	33.01	-17.29	
60 MHz	π/2 BPSK	2526.0	H	151.0	312.0	9.43	1 / 81	14.17	23.60	0.229	33.01	-9.41
		2593.0	H	106.0	316.0	9.58	1 / 81	13.91	23.49	0.223	33.01	-9.52
		2660.0	H	116.0	319.0	9.91	1 / 81	13.17	23.08	0.203	33.01	-9.93
	QPSK	2526.0	H	151.0	312.0	9.43	1 / 81	13.65	23.08	0.203	33.01	-9.93
		2593.0	H	106.0	316.0	9.58	1 / 81	12.70	22.28	0.169	33.01	-10.73
		2660.0	H	116.0	319.0	9.91	1 / 81	12.90	22.81	0.191	33.01	-10.20
	16-QAM	2526.0	H	151.0	312.0	9.43	1 / 81	12.33	21.76	0.150	33.01	-11.25
64-QAM	2526.0	H	151.0	312.0	9.43	1 / 81	9.78	19.21	0.083	33.01	-13.80	
256-QAM	2660.0	H	116.0	319.0	9.91	1 / 81	8.96	18.87	0.077	33.01	-14.14	
50 MHz	π/2 BPSK	2521.0	H	151.0	312.0	9.44	1 / 66	13.97	23.40	0.219	33.01	-9.61
		2593.0	H	106.0	316.0	9.58	1 / 66	14.08	23.66	0.232	33.01	-9.35
		2665.0	H	116.0	319.0	9.90	1 / 66	13.46	23.36	0.217	33.01	-9.65
	QPSK	2521.0	H	151.0	312.0	9.44	1 / 66	13.40	22.83	0.192	33.01	-10.18
		2593.0	H	106.0	316.0	9.58	1 / 66	12.97	22.55	0.180	33.01	-10.46
		2665.0	H	116.0	319.0	9.90	1 / 66	12.94	22.84	0.192	33.01	-10.17
	16-QAM	2521.0	H	151.0	312.0	9.44	1 / 66	12.59	22.02	0.159	33.01	-10.99
64-QAM	2521.0	H	151.0	312.0	9.44	1 / 66	9.94	19.37	0.087	33.01	-13.64	
256-QAM	2593.0	H	106.0	316.0	9.58	1 / 66	7.21	16.79	0.048	33.01	-16.22	
40 MHz	π/2 BPSK	2516.0	H	151.0	312.0	9.44	1 / 52	13.01	22.45	0.176	33.01	-10.56
		2593.0	H	106.0	316.0	9.58	1 / 52	13.59	23.17	0.208	33.01	-9.84
		2670.0	H	116.0	319.0	9.89	1 / 52	13.12	23.01	0.200	33.01	-10.00
	QPSK	2516.0	H	151.0	312.0	9.44	1 / 52	12.87	22.31	0.170	33.01	-10.70
		2593.0	H	106.0	316.0	9.58	1 / 52	12.76	22.34	0.171	33.01	-10.67
		2670.0	H	116.0	319.0	9.89	1 / 52	12.96	22.85	0.193	33.01	-10.16
	16-QAM	2593.0	H	106.0	316.0	9.58	1 / 52	11.59	21.17	0.131	33.01	-11.84
64-QAM	2593.0	H	106.0	316.0	9.58	1 / 52	8.27	17.85	0.061	33.01	-15.16	
256-QAM	2593.0	H	106.0	316.0	9.58	1 / 52	7.79	17.37	0.055	33.01	-15.64	
20 MHz	π/2 BPSK	2506.0	H	151.0	312.0	9.45	1 / 26	12.43	21.88	0.154	33.01	-11.13
		2593.0	H	106.0	316.0	9.58	1 / 26	13.11	22.69	0.186	33.01	-10.32
		2680.0	H	116.0	319.0	9.86	1 / 26	11.23	21.09	0.129	33.01	-11.92
	QPSK	2506.0	H	151.0	312.0	9.45	1 / 26	12.58	22.03	0.160	33.01	-10.98
		2593.0	H	106.0	316.0	9.58	1 / 26	12.28	21.86	0.154	33.01	-11.15
		2680.0	H	116.0	319.0	9.86	1 / 26	12.23	22.09	0.162	33.01	-10.92
	16-QAM	2593.0	H	106.0	316.0	9.58	1 / 26	11.49	21.07	0.128	33.01	-11.94
64-QAM	2593.0	H	106.0	316.0	9.58	1 / 26	8.61	18.19	0.066	33.01	-14.82	
256-QAM	2593.0	H	106.0	316.0	9.58	1 / 26	7.45	17.03	0.050	33.01	-15.98	
	QPSK (CP-OFDM)	2593.0	H	112.0	21.0	9.58	1 / 0	7.75	17.33	0.054	33.01	-15.68
	QPSK (Opposite Pol.)	2593.0	V	164.0	98.0	9.58	1 / 0	8.54	18.12	0.065	33.01	-14.89
	QPSK (WCP)	2593.0	V	152.0	22.0	9.58	1 / 0	7.69	17.27	0.053	33.01	-15.74

Table 7-24. EIRP Data (Band n41)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 413 of 494

7.8 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 414 of 494

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

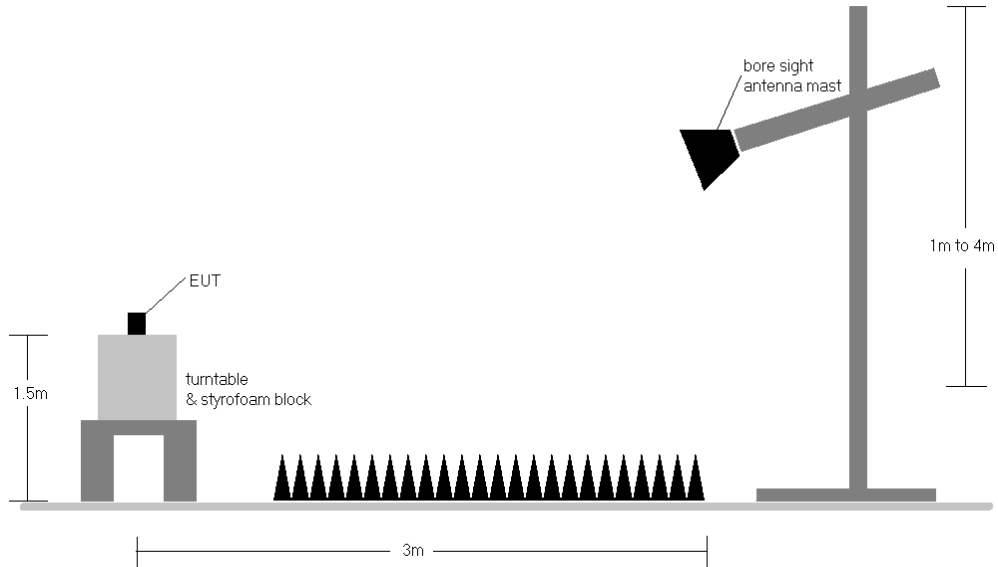



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 415 of 494

Band 71

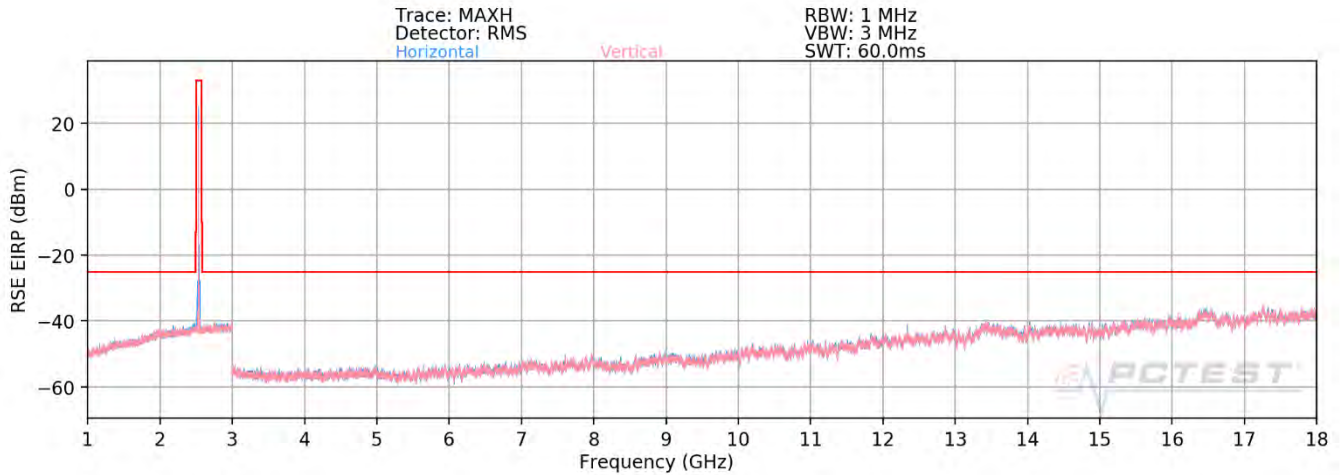

Plot 7-723. Radiated Spurious Plot above 1GHz (Band 71)

OPERATING FREQUENCY: 673.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1346.00	H	100	173	-55.17	2.91	-52.26	-39.3
2019.00	H	111	128	-65.30	2.82	-62.48	-49.5
2692.00	H	-	-	-66.53	4.53	-62.00	-49.0
3365.00	H	-	-	-67.86	6.10	-61.77	-48.8

Table 7-25. Radiated Spurious Data (Band 71 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset			Page 416 of 494

OPERATING FREQUENCY: 680.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1361.00	H	101	194	-57.81	2.88	-54.94	-41.9
2041.50	H	107	70	-63.93	2.73	-61.20	-48.2
2722.00	H	-	-	-66.92	4.63	-62.30	-49.3
3402.50	H	-	-	-68.26	6.26	-62.00	-49.0

Table 7-26. Radiated Spurious Data (Band 71 – Mid Channel)


OPERATING FREQUENCY: 688.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1376.00	H	101	175	-56.70	2.64	-54.06	-41.1
2064.00	H	127	132	-64.80	2.82	-61.98	-49.0
2752.00	H	-	-	-66.02	4.60	-61.42	-48.4
3440.00	H	-	-	-67.78	6.28	-61.50	-48.5


Table 7-27. Radiated Spurious Data (Band 71 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 417 of 494	


Band n71

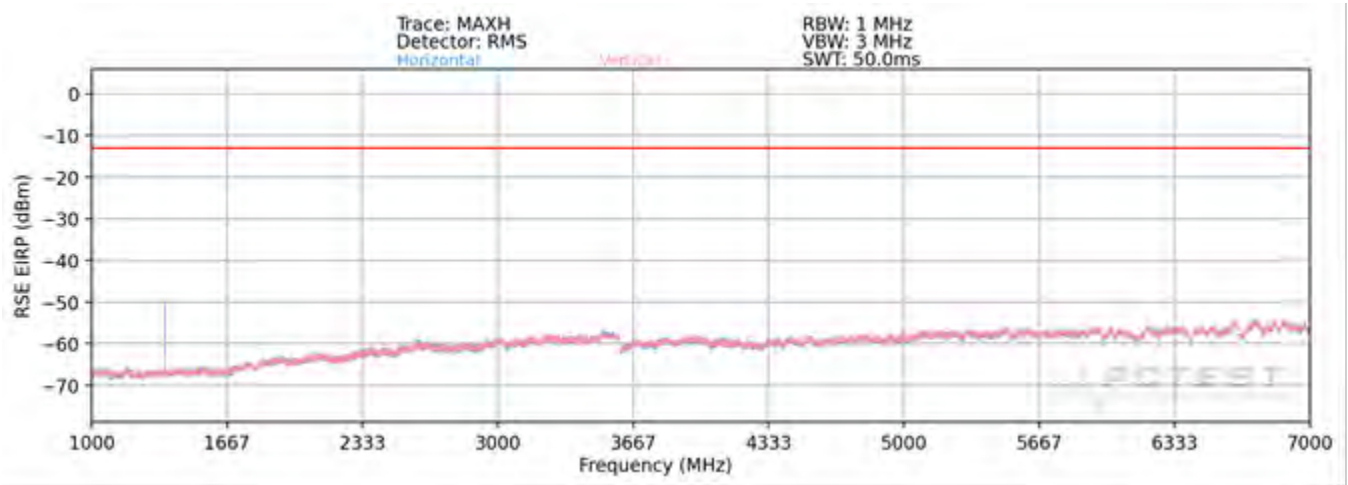

Plot 7-724. Radiated Spurious Plot above 1GHz (n71)

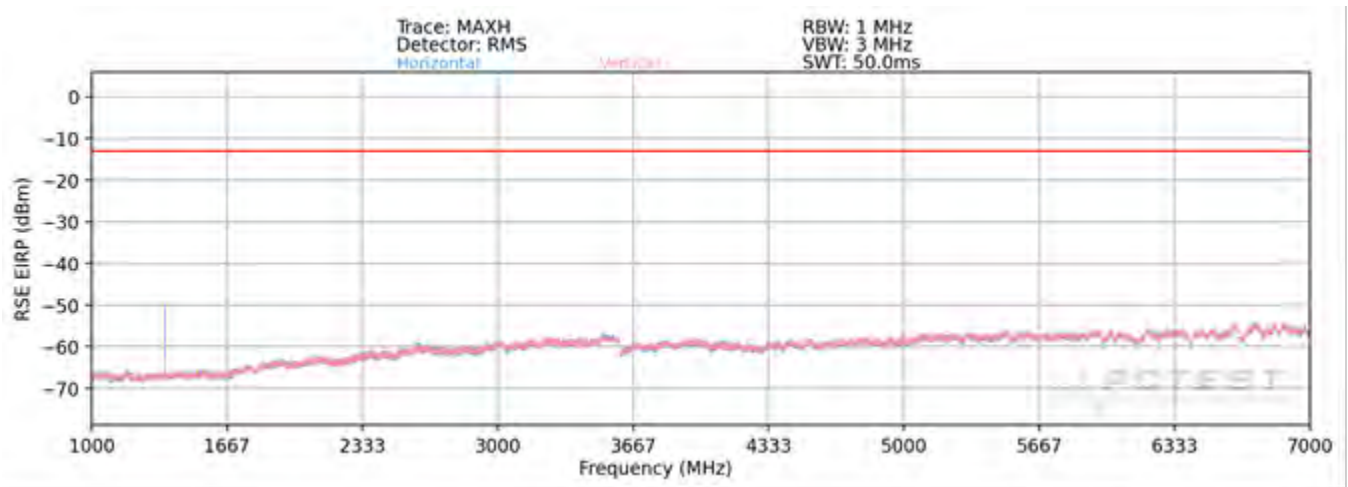

Plot 7-725. Radiated Spurious Plot above 1GHz (n71 + B2)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 418 of 494

OPERATING FREQUENCY: 673.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1346.00	H	172	214	-56.76	7.50	-49.26	-36.3
2019.00	H	-	-	-70.86	8.71	-62.14	-49.1
2692.00	H	-	-	-68.20	10.02	-58.18	-45.2
3365.00	H	-	-	-67.20	9.69	-57.51	-44.5

Table 7-28. Radiated Spurious Data (n71 – Low Channel)

OPERATING FREQUENCY: 680.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1361.00	H	161	201	-55.73	7.51	-48.21	-35.2
2041.50	H	169	194	-70.38	8.79	-61.59	-48.6
2722.00	H	-	-	-67.95	10.11	-57.84	-44.8
3402.50	H	-	-	-67.11	9.83	-57.28	-44.3



Table 7-29. Radiated Spurious Data (n71 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 419 of 494	


OPERATING FREQUENCY: 688.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1376.00	H	164	204	-70.17	7.49	-62.67	-49.7
2064.00	H	-	-	-70.33	8.83	-61.50	-48.5
2752.00	H	-	-	-69.78	10.20	-59.58	-46.6
3440.00	H	-	-	-67.60	9.87	-57.73	-44.7
4128.00	H	-	-	-72.42	10.21	-62.20	-49.2

Table 7-30. Radiated Spurious Data (n71 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 420 of 494

Band 12

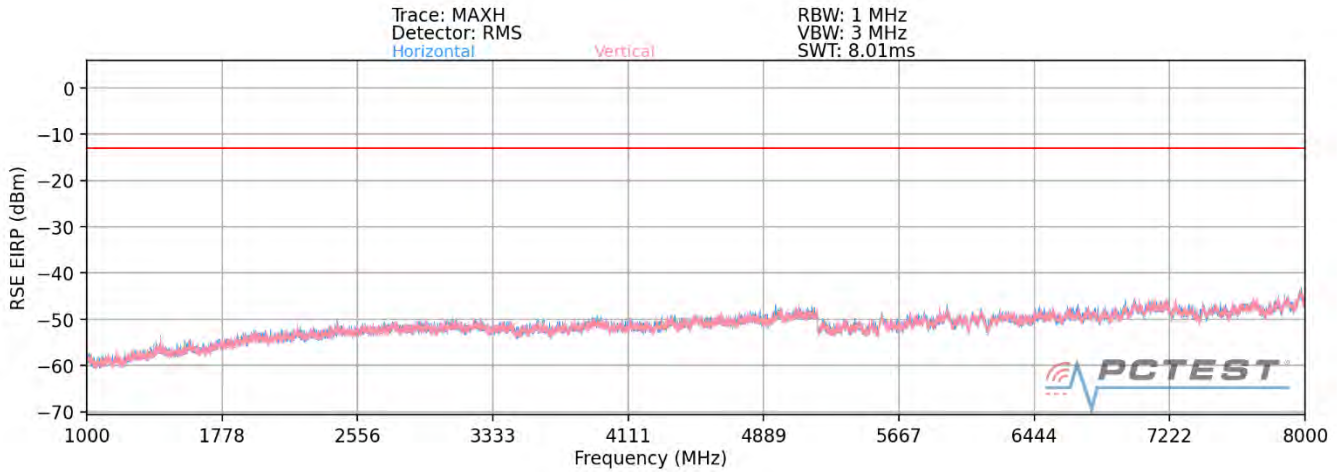

Plot 7-726. Radiated Spurious Plot above 1GHz (Band 12)

OPERATING FREQUENCY: 704.00 MHz

MODULATION SIGNAL: QPSK

BANDWIDTH: 10.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1408.00	H	101	173	-62.52	2.30	-60.22	-47.2
2112.00	H	126	189	-61.09	3.12	-57.97	-45.0
2816.00	H	-	-	-67.03	4.82	-62.20	-49.2
3520.00	H	-	-	-68.23	6.48	-61.75	-48.8

Table 7-31. Radiated Spurious Data (Band 12 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 421 of 494	

OPERATING FREQUENCY: 707.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1415.00	H	107	218	-62.80	2.39	-60.41	-47.4
2122.50	H	102	191	-62.59	3.14	-59.45	-46.5
2830.00	H	-	-	-66.91	4.87	-62.05	-49.0
3537.50	H	-	-	-68.76	6.45	-62.31	-49.3

Table 7-32. Radiated Spurious Data (Band 12 – Mid Channel)


OPERATING FREQUENCY: 711.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1422.00	H	147	169	-63.23	2.53	-60.71	-47.7
2133.00	H	117	190	-62.62	3.11	-59.51	-46.5
2844.00	H	-	-	-66.82	4.91	-61.91	-48.9
3555.00	H	-	-	-68.14	6.46	-61.69	-48.7


Table 7-33. Radiated Spurious Data (Band 12 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 422 of 494	

Band n12

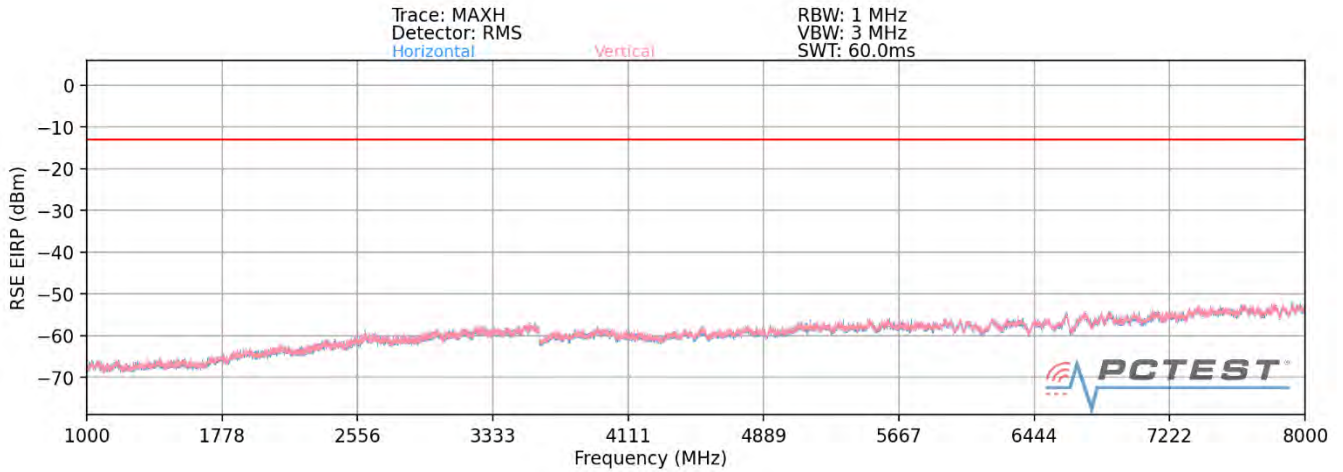

Plot 7-727. Radiated Spurious Plot above 1GHz (n12)

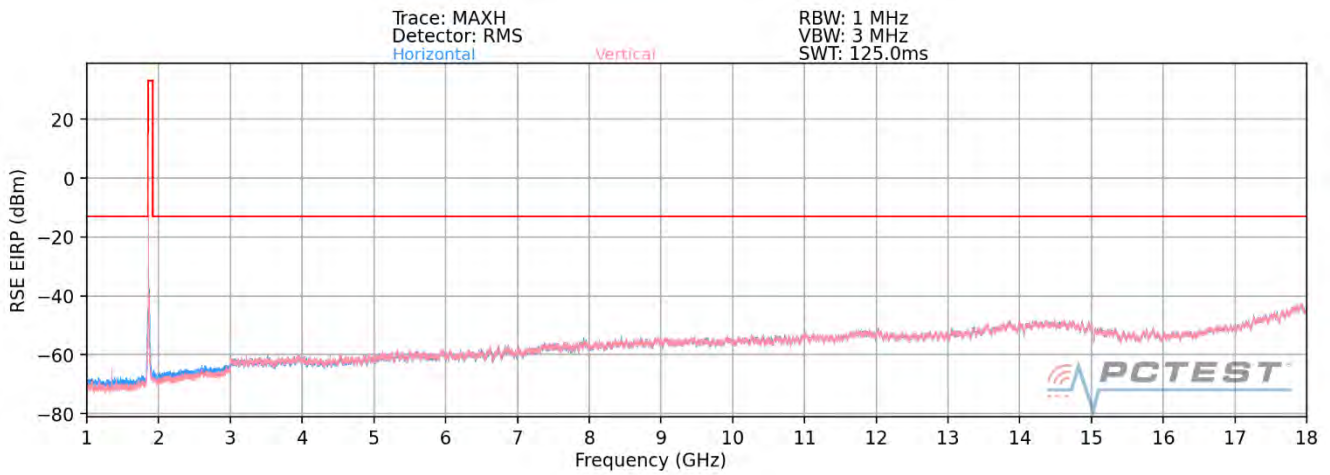

Plot 7-728. Radiated Spurious Plot above 1GHz (n12 + B2)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 423 of 494

OPERATING FREQUENCY: 704.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1408.00	H	390	148	-70.36	7.57	-62.79	-49.8
2112.00	H	-	-	-69.39	8.88	-60.51	-47.5
2816.00	H	-	-	-68.77	10.15	-58.62	-45.6
3520.00	H	-	-	-65.58	9.94	-55.64	-42.6

Table 7-34. Radiated Spurious Data (Band n12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1415.00	H	143	201	-70.11	7.66	-62.45	-49.5
2122.50	H	-	-	-68.93	8.89	-60.04	-47.0
2830.00	H	-	-	-68.38	10.12	-58.26	-45.3
3537.50	H	-	-	-65.86	9.93	-55.93	-42.9

Table 7-35. Radiated Spurious Data (Band n12 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 424 of 494


OPERATING FREQUENCY: 711.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1422.00	H	152	222	-71.45	7.75	-63.70	-50.7
2133.00	H	-	-	-69.57	8.90	-60.67	-47.7
2844.00	H	-	-	-68.80	10.10	-58.70	-45.7
3555.00	H	-	-	-66.69	9.92	-56.76	-43.8

Table 7-36. Radiated Spurious Data (Band n12 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset			Page 425 of 494

Band 13

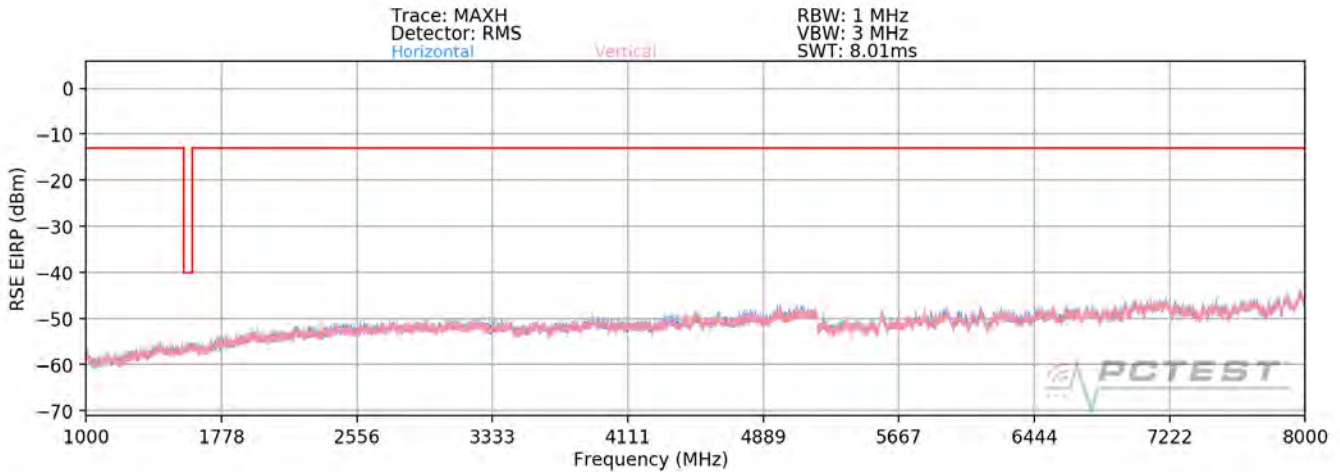

Plot 7-729. Radiated Spurious Plot above 1GHz (Band 13)

OPERATING FREQUENCY: 782.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2346.00	V	107	135	-57.25	4.00	-53.25	-40.3
3128.00	V	-	-	-65.06	5.38	-59.68	-46.7
3910.00	V	-	-	-66.86	7.09	-59.77	-46.8
4692.00	V	-	-	-67.30	8.37	-58.94	-45.9

Table 7-37. Radiated Spurious Data (Band 13 – Mid Channel)


MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	V	138	130	-66.39	3.53	-62.86	-22.9

Table 7-38. Radiated Spurious Data (Band 13 – 1559-1610MHz Band)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 426 of 494

Band 26/5

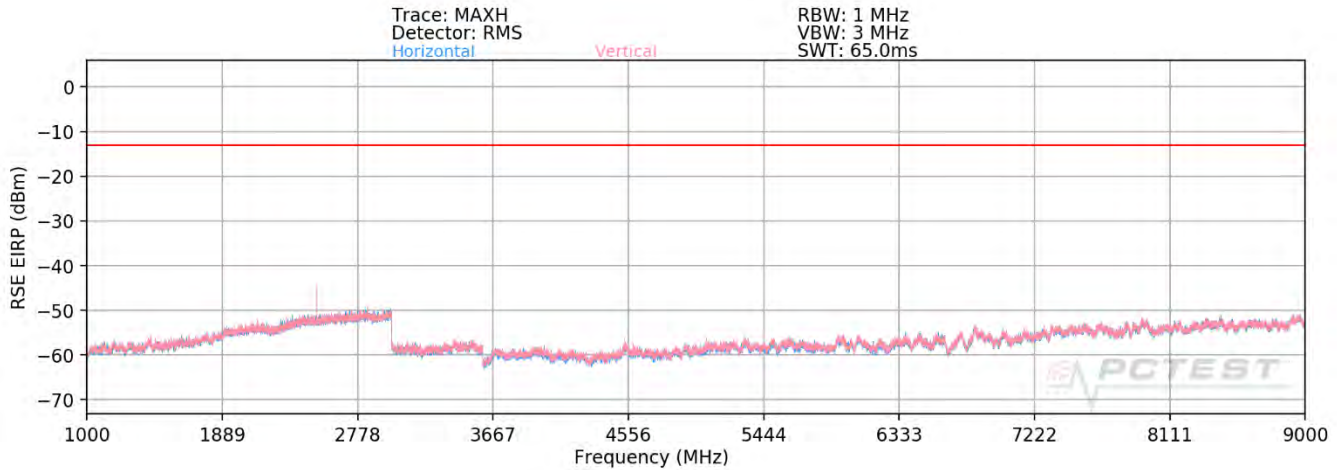

Plot 7-730. Radiated Spurious Plot above 1GHz (Band 26/5)

OPERATING FREQUENCY: 829.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1658.00	V	-	-	-75.16	3.12	-72.04	-59.0
2487.00	V	112	147	-55.40	3.87	-51.53	-38.5
3316.00	V	-	-	-72.33	6.01	-66.32	-53.3
4145.00	V	-	-	-73.01	7.77	-65.24	-52.2

Table 7-39. Radiated Spurious Data (Band 26/5 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 427 of 494	

OPERATING FREQUENCY: 836.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.00	V	-	-	-75.29	3.10	-72.20	-59.2
2509.50	V	113	147	-56.01	4.02	-51.99	-39.0
3346.00	V	-	-	-71.97	6.03	-65.94	-52.9
4182.50	V	-	-	-72.74	7.79	-64.95	-52.0

Table 7-40. Radiated Spurious Data (Band 26/5 – Mid Channel)


OPERATING FREQUENCY: 844.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1688.00	V	-	-	-75.46	3.18	-72.28	-59.3
2532.00	V	111	134	-56.57	4.10	-52.47	-39.5
3376.00	V	-	-	-72.81	6.15	-66.66	-53.7
4220.00	V	-	-	-73.42	7.88	-65.54	-52.5

Table 7-41. Radiated Spurious Data (Band 26/5 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 428 of 494

Band n5

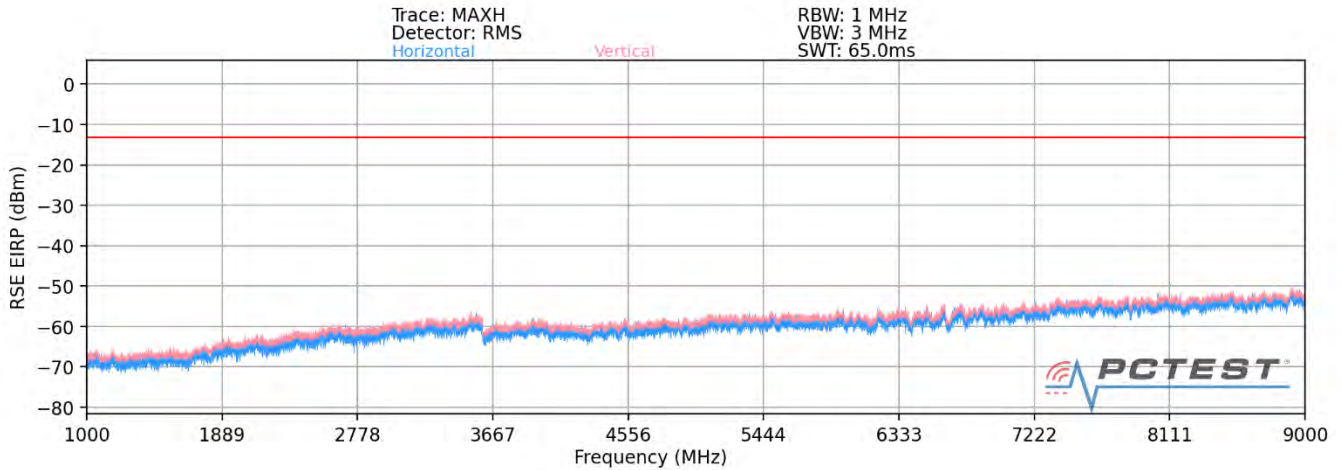

Plot 7-731. Radiated Spurious Plot above 1GHz (Band n5)

OPERATING FREQUENCY: 834.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1668.00	V	-	-	-73.00	8.98	-64.02	-51.0
2502.00	V	-	-	-69.71	9.78	-59.93	-46.9
3336.00	V	-	-	-66.31	9.63	-56.69	-43.7

Table 7-42. Radiated Spurious Data (Band n5 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 429 of 494	

OPERATING FREQUENCY: 836.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.00	V	-	-	-73.45	8.98	-64.47	-51.5
2509.50	V	-	-	-68.88	9.78	-59.09	-46.1
3346.00	V	-	-	-66.76	9.63	-57.13	-44.1

Table 7-43. Radiated Spurious Data (Band n5 – Mid Channel)


OPERATING FREQUENCY: 839.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1678.00	V	-	-	-73.19	8.98	-64.21	-51.2
2517.00	V	-	-	-69.47	9.78	-59.69	-46.7
3356.00	V	-	-	-65.56	9.66	-55.90	-42.9

Table 7-44. Radiated Spurious Data (Band n5 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 430 of 494

Band 66/4

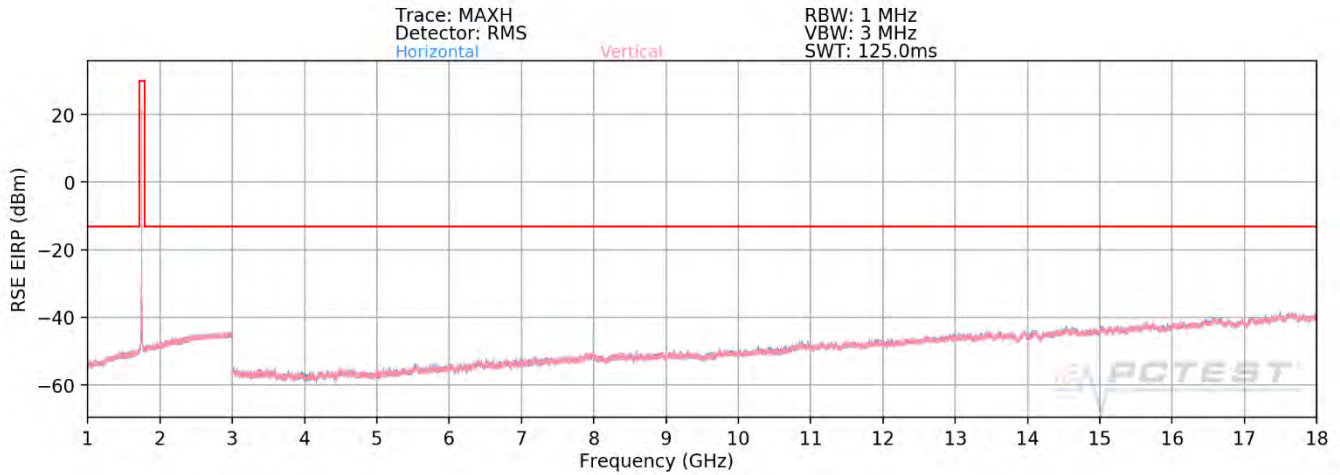

Plot 7-732. Radiated Spurious Plot above 1GHz (Band 66/4)

OPERATING FREQUENCY: 1720.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	-	-	-64.77	6.28	-58.49	-45.5
5160.00	H	-	-	-69.66	8.98	-60.67	-47.7
6880.00	H	123	150	-66.91	9.42	-57.49	-44.5
8600.00	H	-	-	-67.30	9.62	-57.68	-44.7
10320.00	H	-	-	-65.42	9.56	-55.85	-42.9

Table 7-45. Radiated Spurious Data (Band 66/4 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 431 of 494	

OPERATING FREQUENCY: 1745.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	398	155	-65.31	6.47	-58.84	-45.8
5235.00	H	-	-	-69.54	8.97	-60.57	-47.6
6980.00	H	113	149	-68.33	9.23	-59.10	-46.1
8725.00	H	-	-	-66.29	9.59	-56.69	-43.7
10470.00	H	-	-	-66.15	9.43	-56.72	-43.7

Table 7-46. Radiated Spurious Data (Band 66/4 – Mid Channel)


OPERATING FREQUENCY: 1770.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3540.00	H	40	160	-63.95	6.45	-57.50	-44.5
5310.00	H	-	-	-69.21	9.09	-60.12	-47.1
7080.00	H	112	149	-67.94	9.17	-58.77	-45.8
8850.00	H	-	-	-67.14	9.57	-57.57	-44.6
10620.00	H	-	-	-65.16	9.55	-55.61	-42.6


Table 7-47. Radiated Spurious Data (Band 66/4 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 432 of 494


NR Band n66

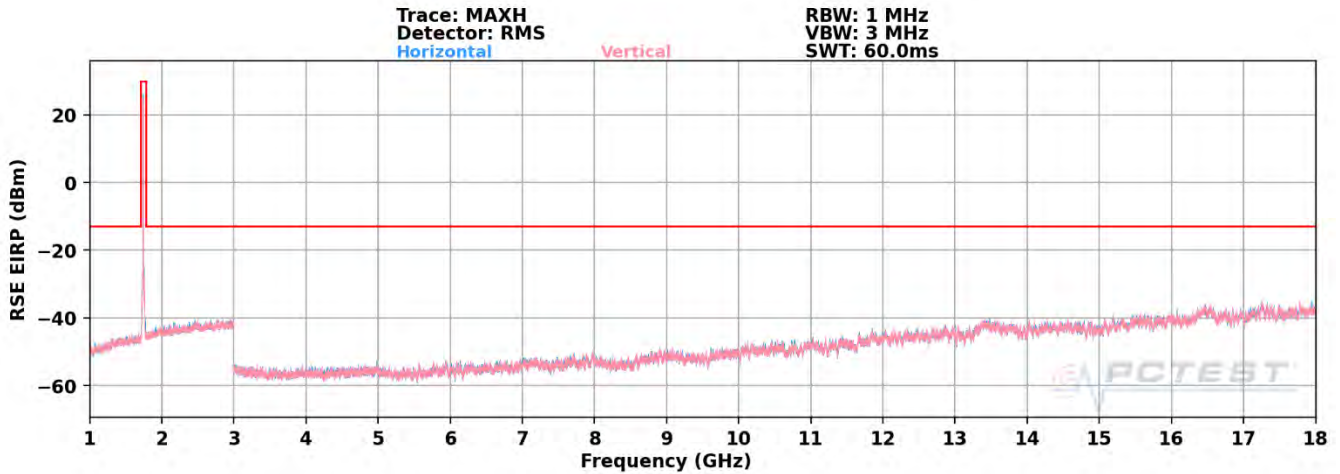

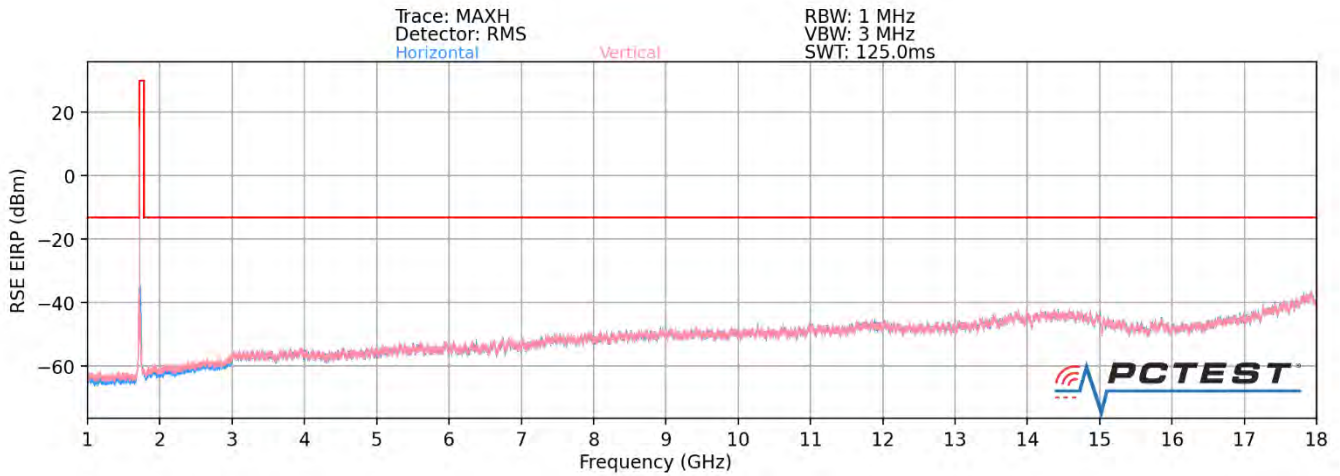

Plot 7-733. Radiated Spurious Plot above 1GHz (n66 Standalone)

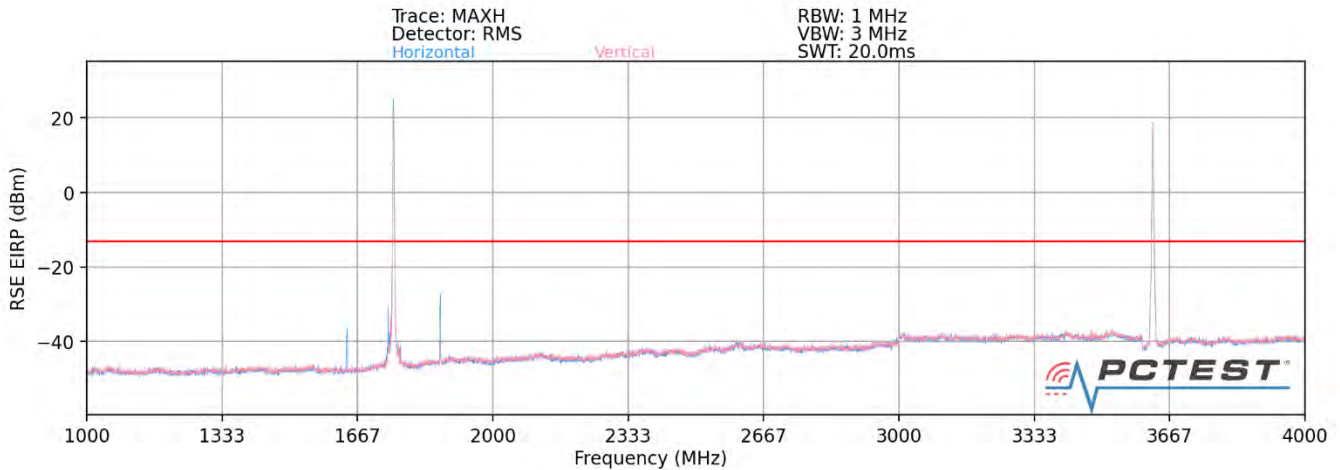


Plot 7-734. Radiated Spurious Plot above 1GHz (n66+ Anchor B12 EN-DC)



Plot 7-735. Radiated Spurious Plot above 1GHz (n66+ Anchor B48 EN-DC 1GHz - 4GHz)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 433 of 494

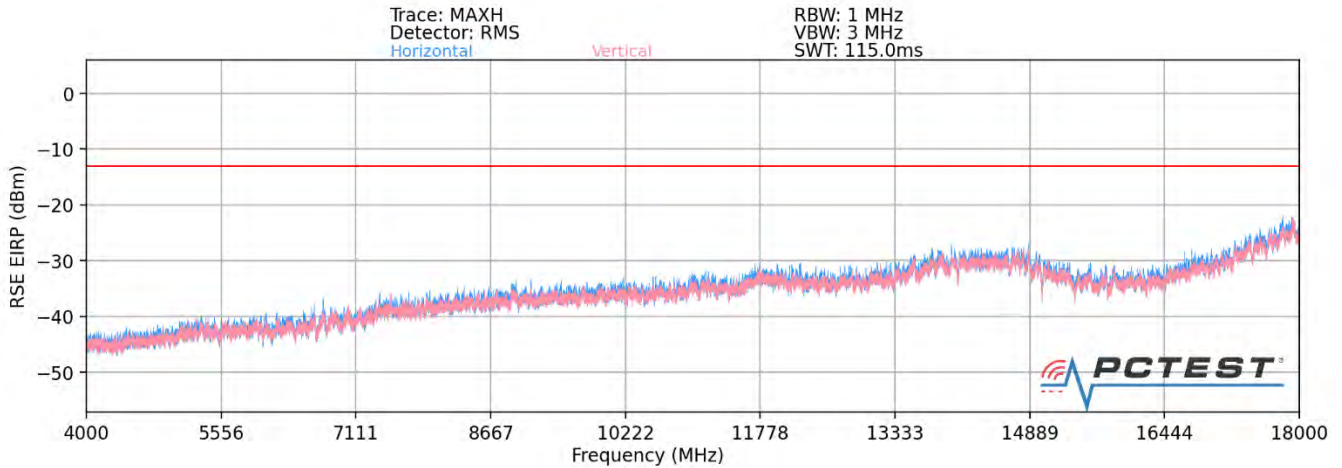


Plot 7-736. Radiated Spurious Plot above 1GHz (n66+ Anchor B48 EN-DC 4GHz – 18GHz)

OPERATING FREQUENCY: 1720.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	127	149	-66.45	6.28	-60.17	-47.2
5160.00	H	-	-	-70.31	8.98	-61.33	-48.3
6880.00	H	-	-	-69.32	9.42	-59.90	-46.9
8600.00	H	-	-	-69.24	9.62	-59.62	-46.6

Table 7-48. Radiated Spurious Data (n66 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 434 of 494	

OPERATING FREQUENCY: 1745.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	133	141	-68.23	6.47	-61.76	-48.8
5235.00	H	-	-	-70.08	8.97	-61.11	-48.1
6980.00	H	111	162	-67.63	9.23	-58.41	-45.4
8725.00	H	-	-	-67.67	9.59	-58.08	-45.1
10470.00	H	-	-	-64.44	9.43	-55.01	-42.0

Table 7-49. Radiated Spurious Data (n66 – Mid Channel)


OPERATING FREQUENCY: 1770.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3540.00	H	147	127	-68.23	6.45	-61.78	-48.8
5310.00	H	-	-	-70.33	9.09	-61.24	-48.2
7080.00	H	-	-	-67.71	9.17	-58.54	-45.5
8850.00	H	-	-	-67.71	9.57	-58.14	-45.1

Table 7-50. Radiated Spurious Data (n66 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 435 of 494

Band 25/2

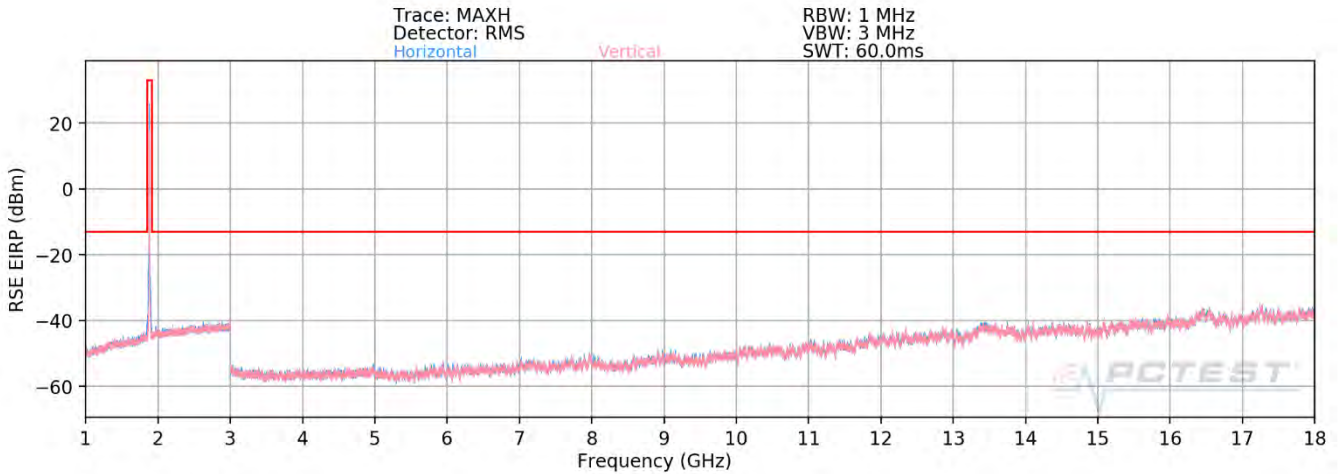

Plot 7-737. Radiated Spurious Plot above 1GHz (Band 25/2)

OPERATING FREQUENCY: 1860.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3720.00	H	400	135	-69.33	6.90	-62.43	-49.4
5580.00	H	-	-	-71.68	9.06	-62.62	-49.6
7440.00	H	-	-	-69.64	9.26	-60.38	-47.4

Table 7-51. Radiated Spurious Data (Band 25/2 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 436 of 494	

OPERATING FREQUENCY: 1882.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3765.00	H	388	153	-70.65	6.94	-63.71	-50.7
5647.50	H	-	-	-72.34	9.17	-63.17	-50.2
7530.00	H	-	-	-69.50	9.31	-60.19	-47.2

Table 7-52. Radiated Spurious Data (Band 25/2 – Mid Channel)


OPERATING FREQUENCY: 1905.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3810.00	H	400	157	-69.75	7.07	-62.68	-49.7
5715.00	H	-	-	-72.06	9.04	-63.02	-50.0
7620.00	H	-	-	-70.30	9.27	-61.04	-48.0


Table 7-53. Radiated Spurious Data (Band 25/2 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 437 of 494


NR Band n25/2

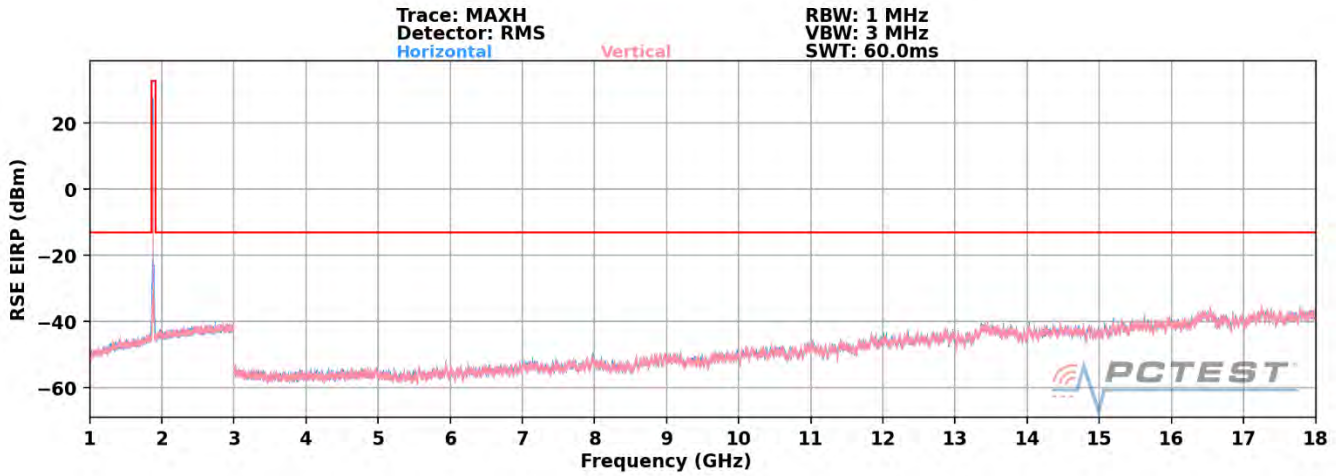

Plot 7-738. Radiated Spurious Plot above 1GHz (n25/2 Standalone)

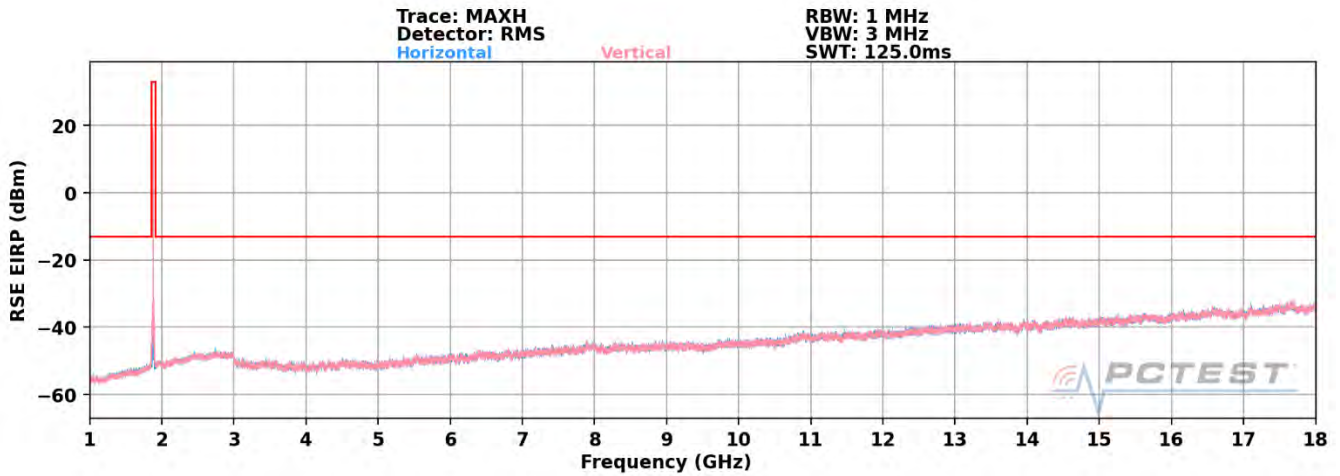

Plot 7-739. Radiated Spurious Plot above 1GHz (n25/2 Anchor B13 EN-DC)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 438 of 494

OPERATING FREQUENCY: 1860.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3720.00	H	386	125	-69.49	9.54	-59.95	-47.0
5580.00	H	385	121	-69.34	11.02	-58.33	-45.3
7440.00	H	-	-	-69.00	11.01	-57.98	-45.0
9300.00	H	-	-	-67.75	11.64	-56.11	-43.1

Table 7-54. Radiated Spurious Data (n25/2 – Low Channel)

OPERATING FREQUENCY: 1882.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3765.00	H	-	-	-72.07	9.39	-62.69	-49.7
5647.50	H	-	-	-71.90	11.22	-60.67	-47.7
7530.00	H	-	-	-68.62	11.16	-57.45	-44.5
9412.50	H	-	-	-67.14	11.60	-55.54	-42.5



Table 7-55. Radiated Spurious Data (n25/2 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 439 of 494


OPERATING FREQUENCY: 1905.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3810.00	H	398	250	-68.31	9.32	-58.98	-46.0
5715.00	H	398	146	-71.58	11.38	-60.20	-47.2
7620.00	H	-	-	-69.65	11.32	-58.34	-45.3
9525.00	H	-	-	-67.54	11.76	-55.78	-42.8

Table 7-56. Radiated Spurious Data (n25/2 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 440 of 494

Band 30

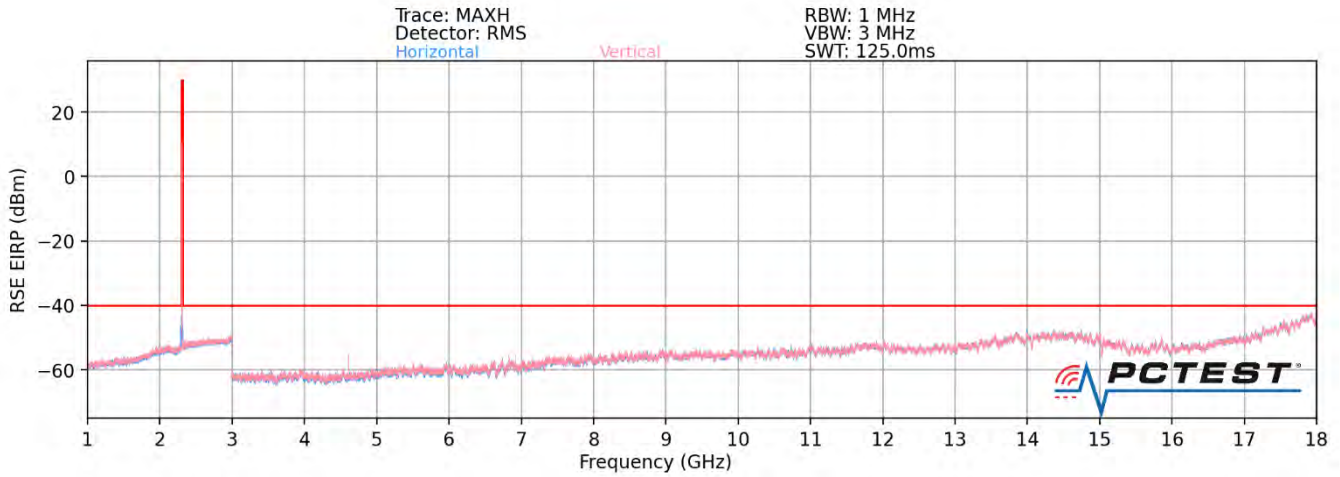

Plot 7-740. Radiated Spurious Plot above 1GHz (Band 30)


OPERATING FREQUENCY: 2310.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
4620.00	H	101	212	-52.85	8.42	-44.43	-4.4
6930.00	H	-	-	-57.11	9.38	-47.72	-7.7
9240.00	H	-	-	-54.59	9.46	-45.12	-5.1
11550.00	H	-	-	-54.71	9.48	-45.23	-5.2


Table 7-57. Radiated Spurious Data (Band 30)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 441 of 494	

Band 41/38

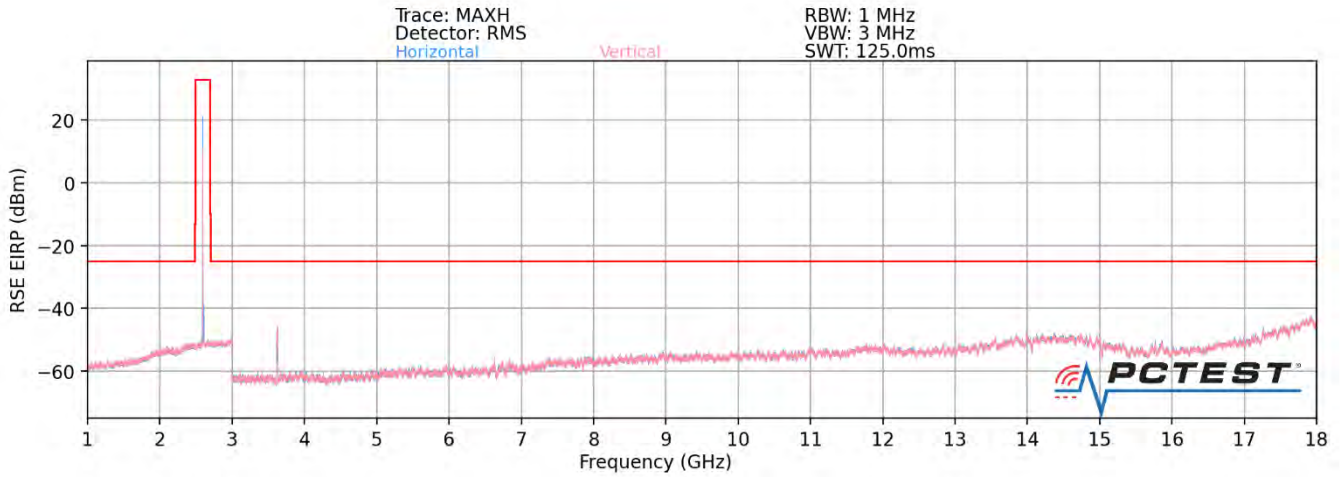

Plot 7-741. Radiated Spurious Plot above 1GHz (Band 41/38)

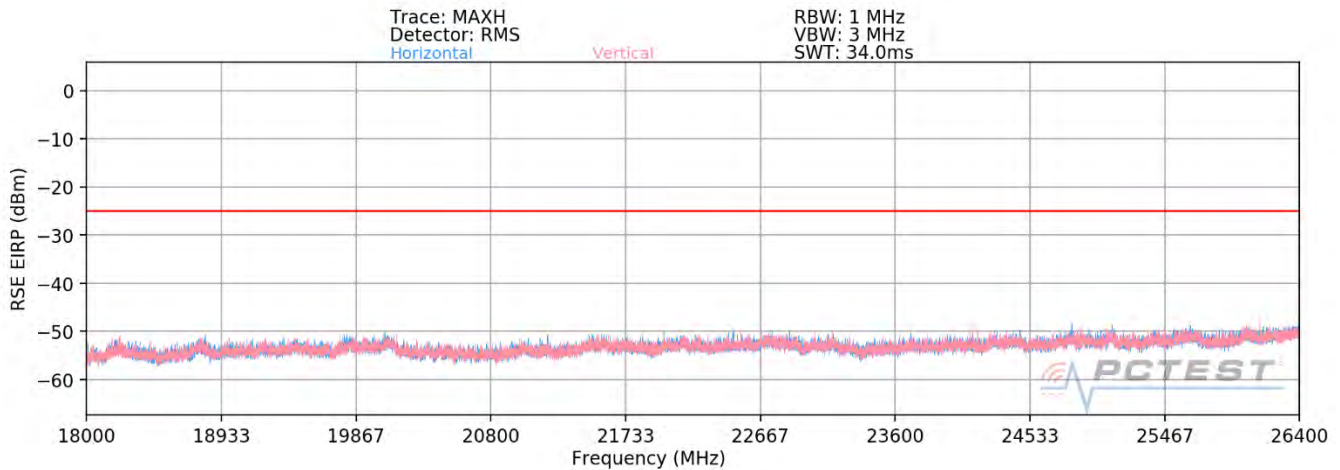

Plot 7-742. Radiated Spurious Plot 18GHz – 26.5GHz (Band 41/38)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 442 of 494

OPERATING FREQUENCY: 2510.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5020.00	V	176	301	-59.97	8.78	-51.18	-26.2
7530.00	V	-	-	-56.21	9.31	-46.90	-21.9
10040.00	V	-	-	-55.16	9.78	-45.38	-20.4
12550.00	V	-	-	-49.37	8.80	-40.57	-15.6
15060.00	V	-	-	-45.77	8.89	-36.89	-11.9

Table 7-58. Radiated Spurious Data (Band 41/38 – Low Channel)

OPERATING FREQUENCY: 2535.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5070.00	V	172	289	-55.86	8.89	-46.97	-22.0
7605.00	V	176	300	-55.97	9.25	-46.72	-21.7
10140.00	V	-	-	-53.19	9.75	-43.44	-18.4
12675.00	V	-	-	-45.54	8.89	-36.66	-11.7
15210.00	V	-	-	-43.37	8.73	-34.64	-9.6


Table 7-59. Radiated Spurious Data (Band 41/38 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 443 of 494


OPERATING FREQUENCY: 2560.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5120.00	V	106	191	-58.01	8.91	-49.09	-24.1
7680.00	V	107	200	-52.06	9.28	-42.79	-17.8
10240.00	V	-	-	-51.60	9.66	-41.95	-16.9
12800.00	V	-	-	-46.21	8.87	-37.33	-12.3
15360.00	V	-	-	-42.73	8.44	-34.29	-9.3


Table 7-60. Radiated Spurious Data (Band 41/38 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 444 of 494


NR Band n41

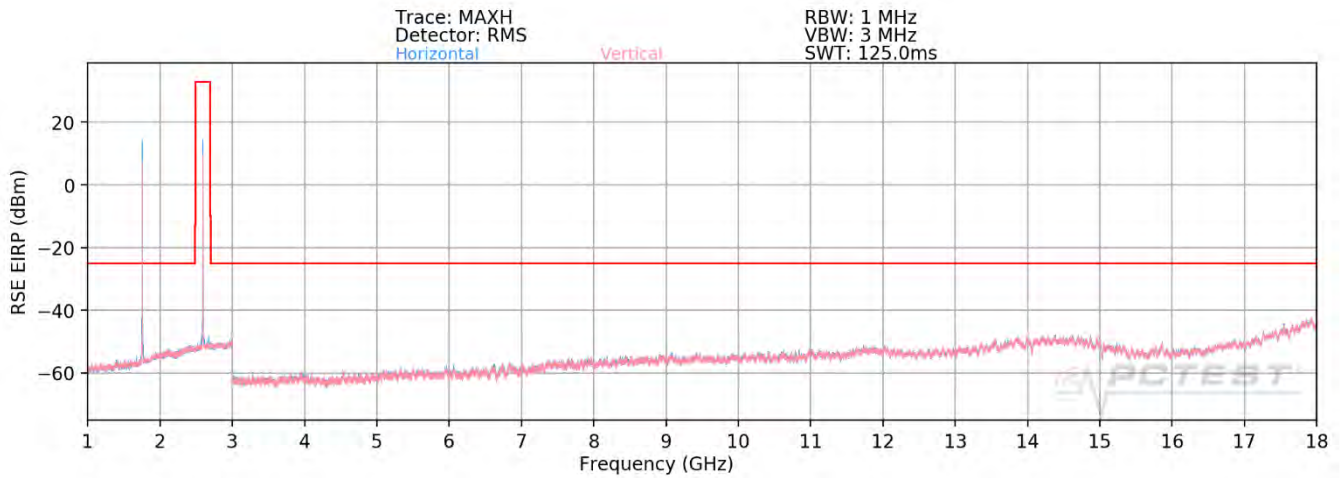

Plot 7-743. Radiated Spurious Plot above 1GHz (n41 Standalone)

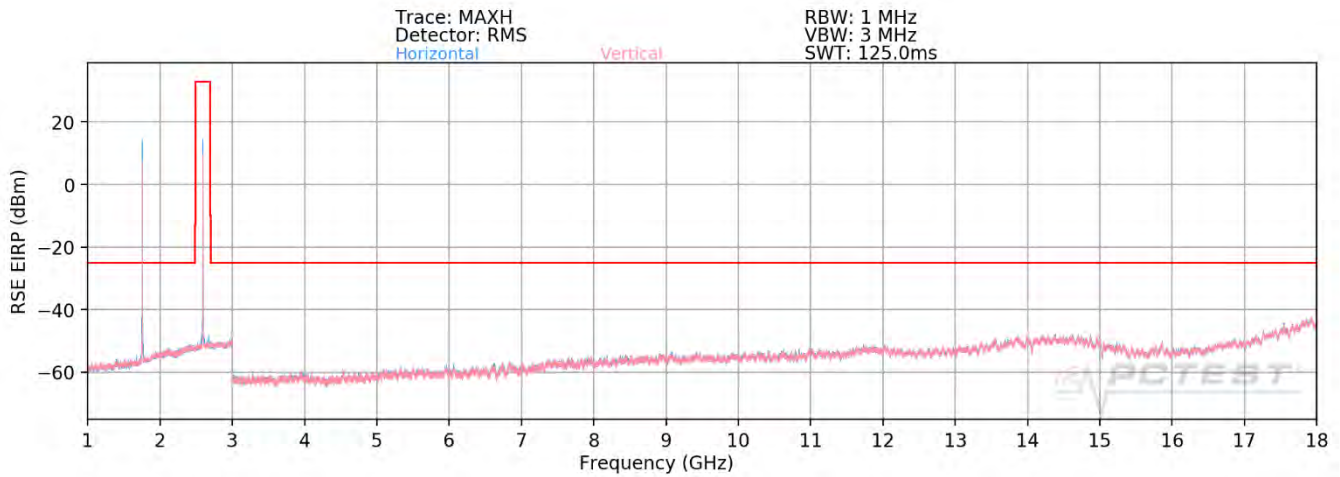

Plot 7-744. Radiated Spurious Plot above 1GHz (n41 + Anchor B66 EN-DC)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 445 of 494

OPERATING FREQUENCY: 2545.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 100.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5090.00	V	111	136	-61.87	10.73	-51.15	-26.1
7635.00	V	-	-	-67.37	11.35	-56.02	-31.0
10180.00	V	-	-	-66.33	12.15	-54.18	-29.2
12725.00	V	114	204	-62.71	13.68	-49.03	-24.0
15270.00	V	-	-	-66.80	14.92	-51.88	-26.9
17815.00	V	-	-	-54.03	9.99	-44.05	-19.0

Table 7-61. Radiated Spurious Data (Band n41 – Low Channel)

OPERATING FREQUENCY: 2593.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 100.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5186.00	V	119	233	-62.53	10.77	-51.75	-26.8
7779.00	V	118	147	-62.76	11.47	-51.29	-26.3
10372.00	V	116	182	-65.67	12.48	-53.19	-28.2
12965.00	V	-	-	-66.24	13.34	-52.89	-27.9
15558.00	V	-	-	-70.19	16.37	-53.82	-28.8


Table 7-62. Radiated Spurious Data (Band n41 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 446 of 494


OPERATING FREQUENCY: 2645.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 100.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5290.00	V	125	237	-62.26	10.72	-51.54	-26.5
7935.00	V	163	188	-61.10	11.28	-49.82	-24.8
10580.00	V	157	195	-65.55	12.64	-52.91	-27.9
13225.00	V	-	-	-65.76	13.04	-52.72	-27.7
15870.00	V	-	-	-68.79	16.70	-52.09	-27.1

Table 7-63. Radiated Spurious Data (Band n41 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 447 of 494

Band 7

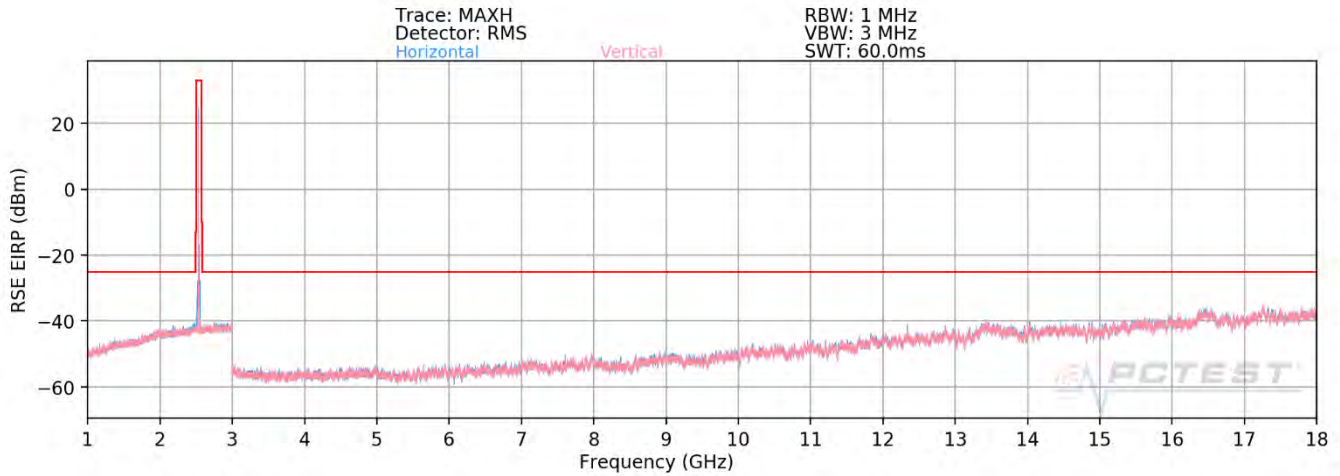

Plot 7-745. Radiated Spurious Plot above 1GHz (Band 7)

OPERATING FREQUENCY: 2510.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5020.00	V	176	301	-59.97	8.78	-51.18	-26.2
7530.00	V	-	-	-56.21	9.31	-46.90	-21.9
10040.00	V	-	-	-55.16	9.78	-45.38	-20.4
12550.00	V	-	-	-49.37	8.80	-40.57	-15.6
15060.00	V	-	-	-45.77	8.89	-36.89	-11.9

Table 7-64. Radiated Spurious Data (Band 7 – Low Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 448 of 494	

OPERATING FREQUENCY: 2535.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5070.00	V	172	289	-55.86	8.89	-46.97	-22.0
7605.00	V	176	300	-55.97	9.25	-46.72	-21.7
10140.00	V	-	-	-53.19	9.75	-43.44	-18.4
12675.00	V	-	-	-45.54	8.89	-36.66	-11.7
15210.00	V	-	-	-43.37	8.73	-34.64	-9.6

Table 7-65. Radiated Spurious Data (Band 7 – Mid Channel)

OPERATING FREQUENCY: 2560.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5120.00	V	106	191	-58.01	8.91	-49.09	-24.1
7680.00	V	107	200	-52.06	9.28	-42.79	-17.8
10240.00	V	-	-	-51.60	9.66	-41.95	-16.9
12800.00	V	-	-	-46.21	8.87	-37.33	-12.3
15360.00	V	-	-	-42.73	8.44	-34.29	-9.3

Table 7-66. Radiated Spurious Data (Band 7 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 449 of 494

7.9 Uplink Carrier Aggregation Radiated Measurements

§2.1053,

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. No. of sweep points $\geq 2 \times$ span / RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. The trace was allowed to stabilize

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 450 of 494

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

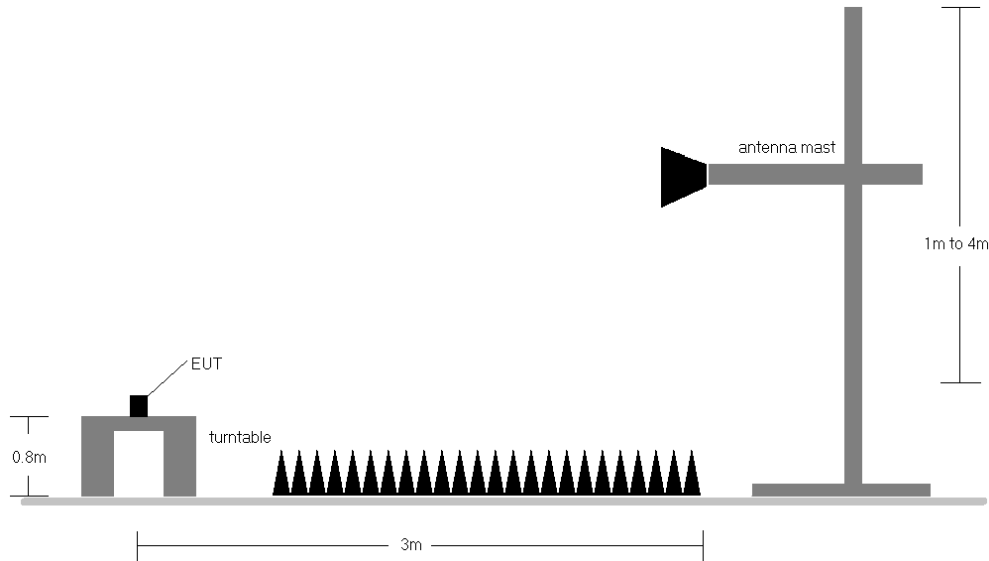



Figure 7-9. Test Instrument & Measurement Setup

Test Notes


- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery. This unit was tested with its standard battery.
- 3) Radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) No significant emissions were found as a result of two uplink carriers operating contiguously.

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 451 of 494

ULCA Band 5

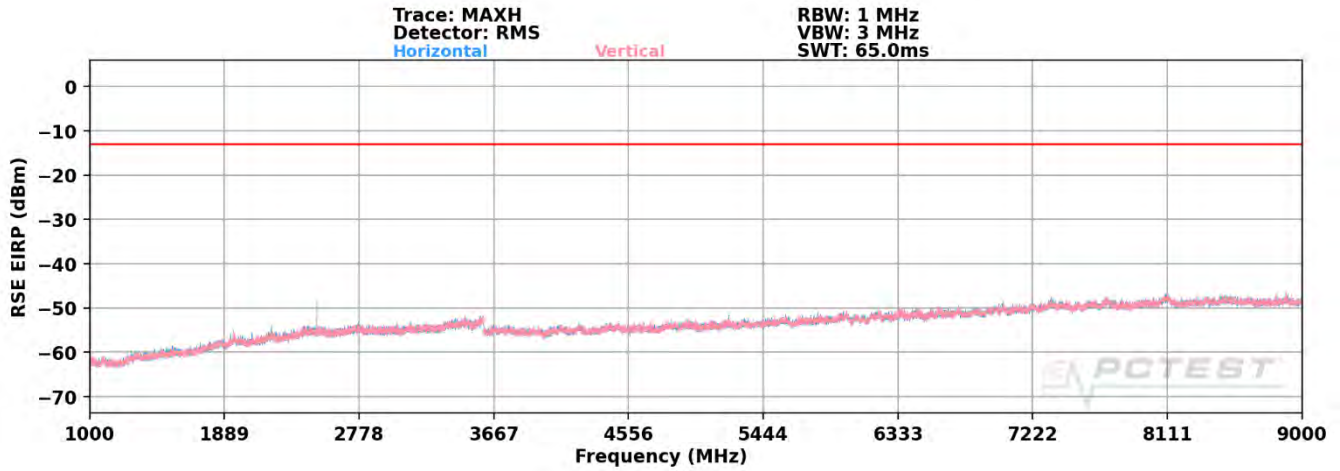

Plot 7-746. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 5 Low Channel – PCC/SCC: 1RB)

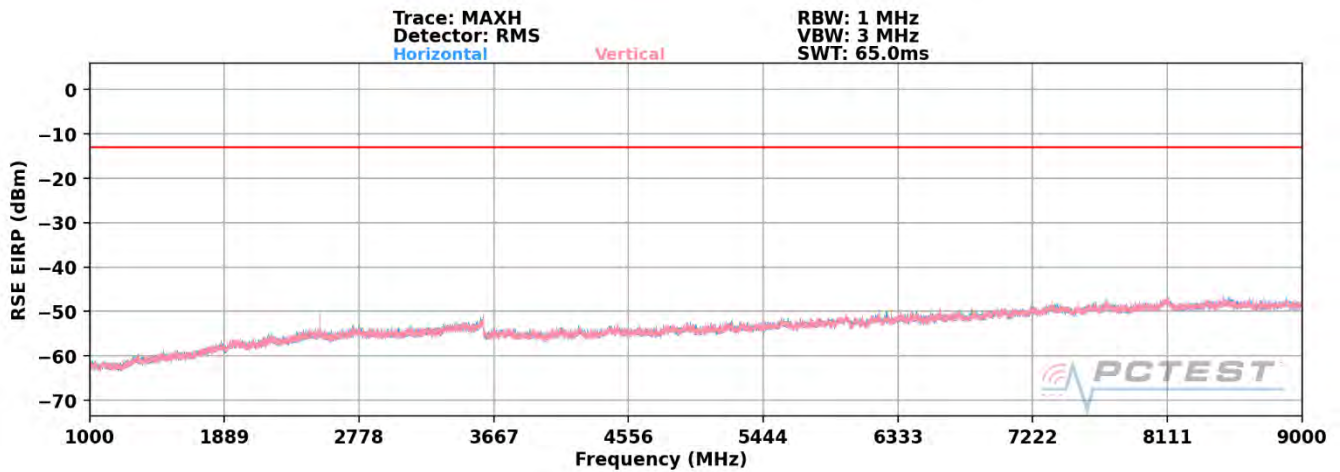

Plot 7-747. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 5 High Channel – PCC/SCC: 1RB)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 452 of 494

OPERATING FREQUENCY (PCC): _____ 829.00 _____ MHz
 OPERATING FREQUENCY (SCC): _____ 838.90 _____ MHz
 CHANNEL (PCC): _____ 20450 _____
 CHANNEL (SCC): _____ 20549 _____
 MODULATION SIGNAL: _____ QPSK _____
 BANDWIDTH: _____ 10.0 _____ MHz
 DISTANCE: _____ 3 _____ meters
 LIMIT: _____ -13 _____ dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1658.00	V	-	-	-75.28	3.12	-72.16	-59.2
2487.00	V	121	150	-55.14	3.87	-51.27	-38.3
3316.00	V	-	-	-72.23	6.01	-66.22	-53.2
4145.00	V	-	-	-75.18	7.77	-67.41	-54.4

Plot 7-67. Radiated Spurious Data (ULCA B5 PCC: RB 1 Offset 49, SCC: RB 1 Offset 0 – Low Channel)


OPERATING FREQUENCY (PCC): _____ 844.00 _____ MHz
 OPERATING FREQUENCY (SCC): _____ 834.10 _____ MHz
 CHANNEL (PCC): _____ 20600 _____
 CHANNEL (SCC): _____ 20501 _____
 MODULATION SIGNAL: _____ QPSK _____
 BANDWIDTH: _____ 10.0 _____ MHz
 DISTANCE: _____ 3 _____ meters
 LIMIT: _____ -13 _____ dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1688.00	V	-	-	-75.71	3.18	-72.53	-59.5
2532.00	V	121	158	-55.28	4.10	-51.18	-38.2
3376.00	V	-	-	-73.61	6.15	-67.46	-54.5
4220.00	V	-	-	-74.44	7.88	-66.56	-53.6


Plot 7-68. Radiated Spurious Data (ULCA B5 PCC: RB 1 Offset 0, SCC: RB 1 Offset 49 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 453 of 494


ULCA Band 66

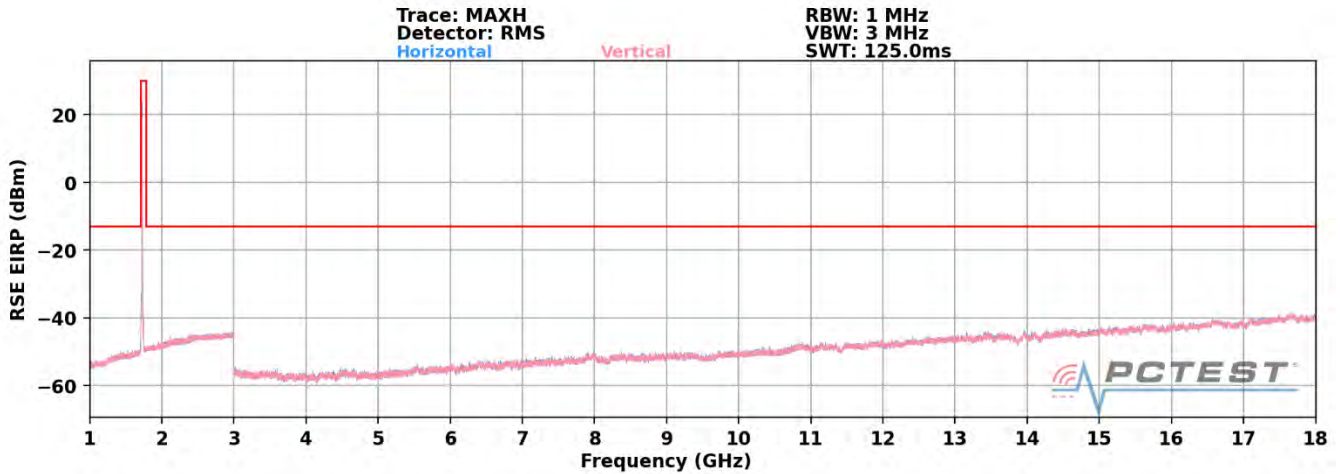

Plot 7-748. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 66 Low Channel – PCC/SCC: 1RB)

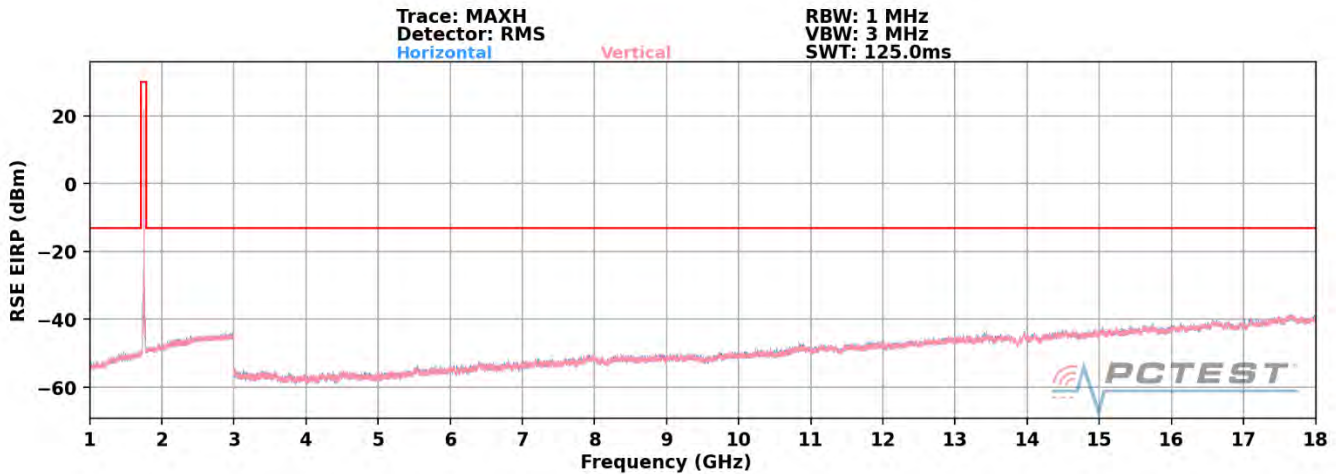

Plot 7-749. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 66 Mid Channel – PCC/SCC: 1RB)

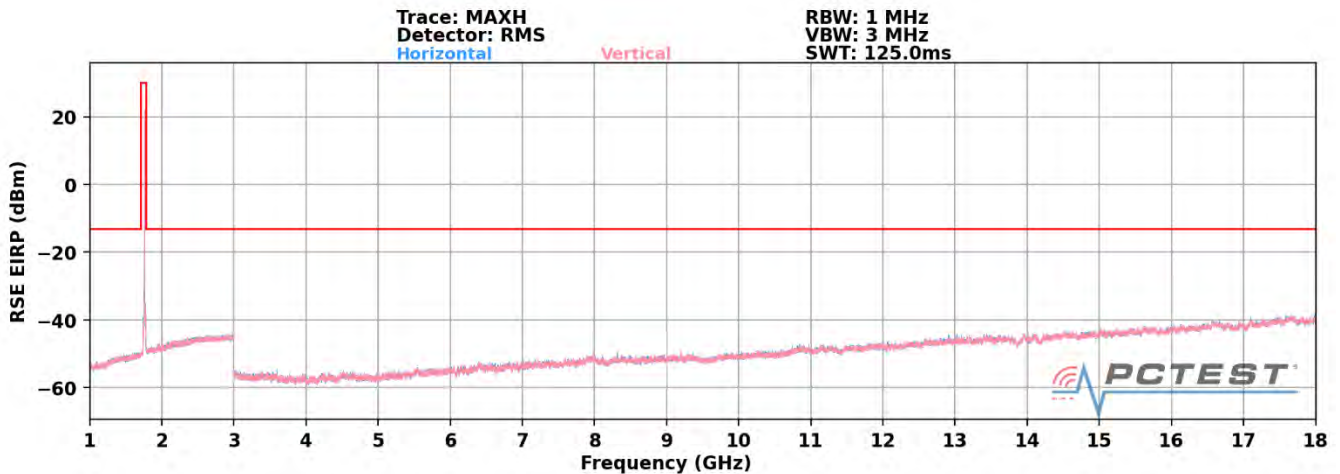

Plot 7-750. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 66 High Channel – PCC/SCC: 1RB)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 454 of 494

OPERATING FREQUENCY (PCC): _____ 1720.00 _____ MHz
 OPERATING FREQUENCY (SCC): _____ 1739.80 _____ MHz
 CHANNEL (PCC): _____ 132072 _____
 CHANNEL (SCC): _____ 132270 _____
 MODULATION SIGNAL: _____ QPSK _____
 BANDWIDTH: _____ 20.0 _____ MHz
 DISTANCE: _____ 3 _____ meters
 LIMIT: _____ -13 _____ dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	102	81	-67.81	6.28	-61.53	-48.5
5160.00	H	102	213	-68.83	8.98	-59.85	-46.8
6880.00	H	-	-	-70.41	9.42	-60.99	-48.0
8600.00	H	-	-	-68.68	9.62	-59.06	-46.1

Plot 7-69. Radiated Spurious Data (ULCA B66 PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Low Channel)

OPERATING FREQUENCY (PCC): _____ 1745.00 _____ MHz
 OPERATING FREQUENCY (SCC): _____ 1764.80 _____ MHz
 CHANNEL (PCC): _____ 132322 _____
 CHANNEL (SCC): _____ 132520 _____
 MODULATION SIGNAL: _____ QPSK _____
 BANDWIDTH: _____ 20.0 _____ MHz
 DISTANCE: _____ 3 _____ meters
 LIMIT: _____ -13 _____ dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	135	146	-67.11	6.47	-60.64	-47.6
5235.00	H	115	216	-69.85	8.97	-60.88	-47.9
6980.00	H	-	-	-69.80	9.23	-60.58	-47.6
8725.00	H	-	-	-67.52	9.59	-57.93	-44.9


Plot 7-70. Radiated Spurious Data (ULCA B66 PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 455 of 494


OPERATING FREQUENCY (PCC): _____ 1770.00 MHz
 OPERATING FREQUENCY (SCC): _____ 1750.20 MHz
 CHANNEL (PCC): _____ 132572
 CHANNEL (SCC): _____ 132374
 MODULATION SIGNAL: _____ QPSK
 BANDWIDTH: _____ 20.0 MHz
 DISTANCE: _____ 3 meters
 LIMIT: _____ -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3540.00	H	107	144	-67.53	6.45	-61.08	-48.1
5310.00	H	103	217	-70.19	9.09	-61.10	-48.1
7080.00	H	-	-	-69.54	9.17	-60.37	-47.4
8850.00	H	-	-	-67.26	9.57	-57.69	-44.7


Plot 7-71. Radiated Spurious Data (ULCA B66 PCC: RB 1 Offset 0, SCC: RB 1 Offset 99 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 456 of 494


ULCA Band 7

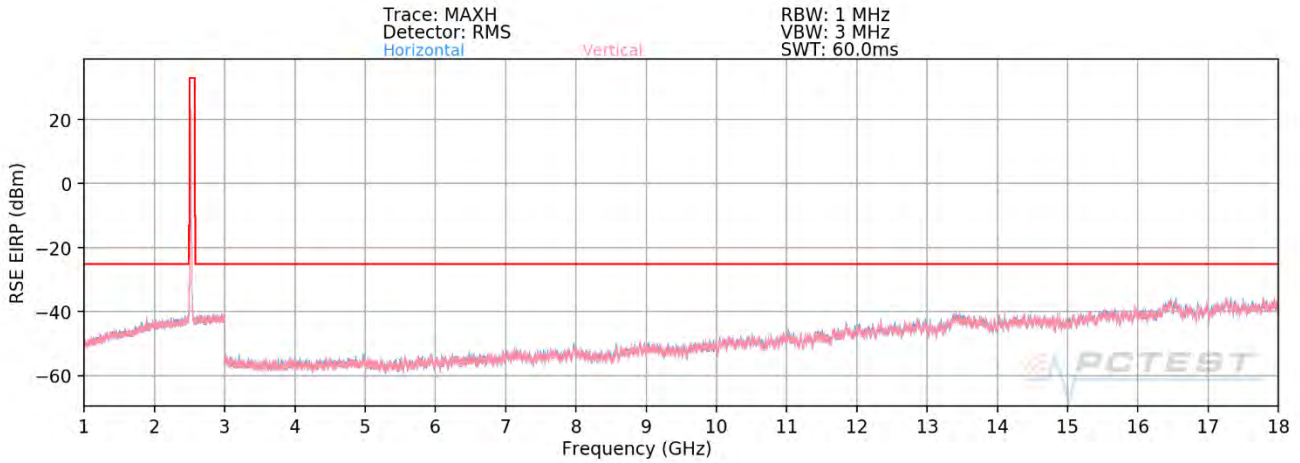


Plot 7-751. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 7 Low Channel – PCC/SCC: 1RB)

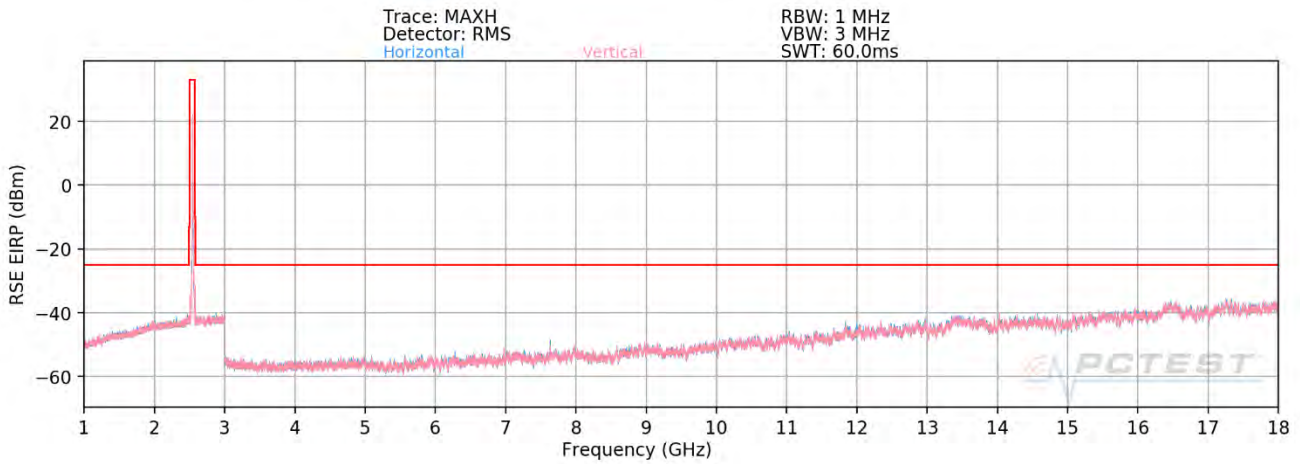

Plot 7-752. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 7 Mid Channel – PCC/SCC: 1RB)

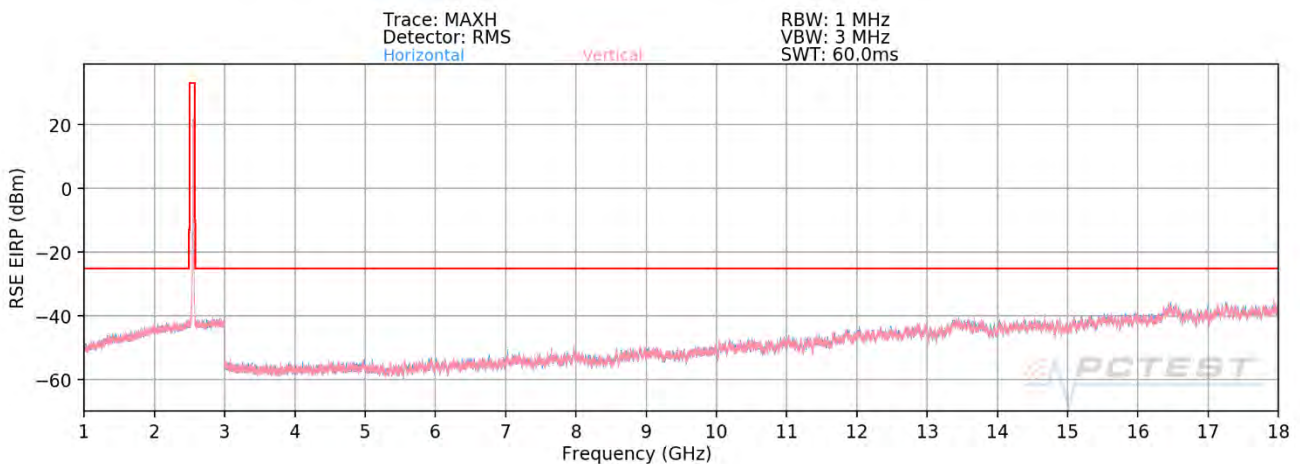

Plot 7-753. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 7 High Channel – PCC/SCC: 1RB)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 457 of 494

OPERATING FREQUENCY (PCC): 2510.00 MHz
 OPERATING FREQUENCY (SCC): 2529.80 MHz
 CHANNEL (PCC): 20850
 CHANNEL (SCC): 21048
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5020.00	H	145	322	-66.77	8.78	-57.98	-45.0
7530.00	H	104	12	-61.58	9.31	-52.27	-39.3
10040.00	H	-	-	-64.57	9.78	-54.79	-41.8
12550.00	H	-	-	-60.09	8.80	-51.29	-38.3

Plot 7-72. Radiated Spurious Data (ULCA B7 PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Low Channel)

OPERATING FREQUENCY (PCC): 2535.00 MHz
 OPERATING FREQUENCY (SCC): 2554.80 MHz
 CHANNEL (PCC): 21100
 CHANNEL (SCC): 21298
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5070.00	H	150	312	-67.50	8.89	-58.61	-45.6
7605.00	H	103	13	-61.84	9.25	-52.59	-39.6
10140.00	H	-	-	-66.74	9.75	-56.99	-44.0
12675.00	H	-	-	-62.56	8.89	-53.67	-40.7



Plot 7-73. Radiated Spurious Data (ULCA B7 PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Mid Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 458 of 494


OPERATING FREQUENCY (PCC): 2560.00 MHz
 OPERATING FREQUENCY (SCC): 2540.20 MHz
 CHANNEL (PCC): 21350
 CHANNEL (SCC): 21152
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5120.00	H	141	317	-67.00	8.91	-58.08	-45.1
7680.00	H	106	18	-63.83	9.28	-54.56	-41.6
10240.00	H	-	-	-65.01	9.66	-55.36	-42.4
12800.00	H	-	-	-60.28	8.87	-51.40	-38.4


Plot 7-74. Radiated Spurious Data (ULCA B7 PCC: RB 1 Offset 0, SCC: RB 1 Offset 99 – High Channel)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 459 of 494


ULCA Band 41

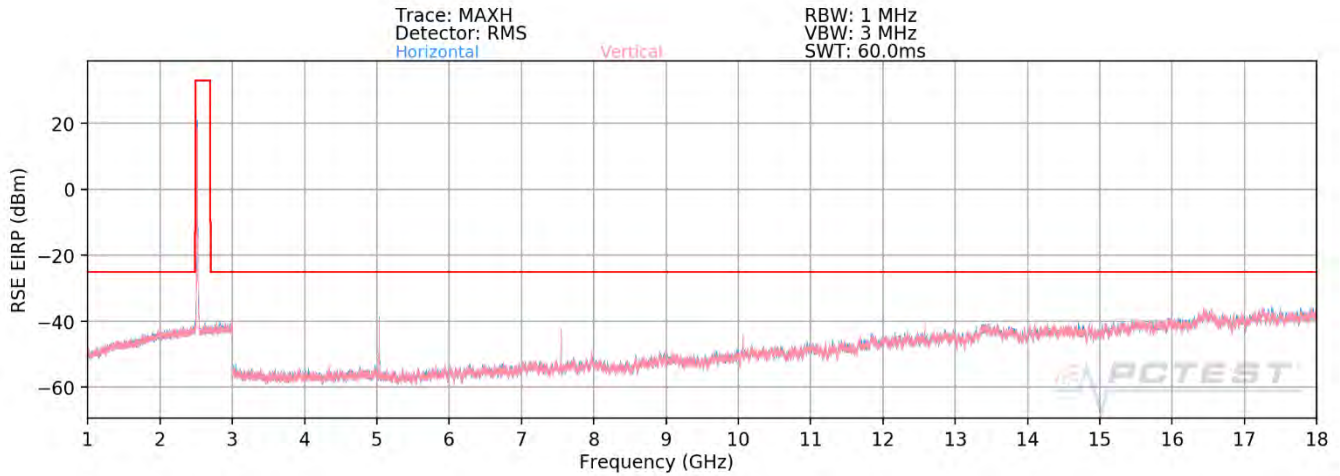

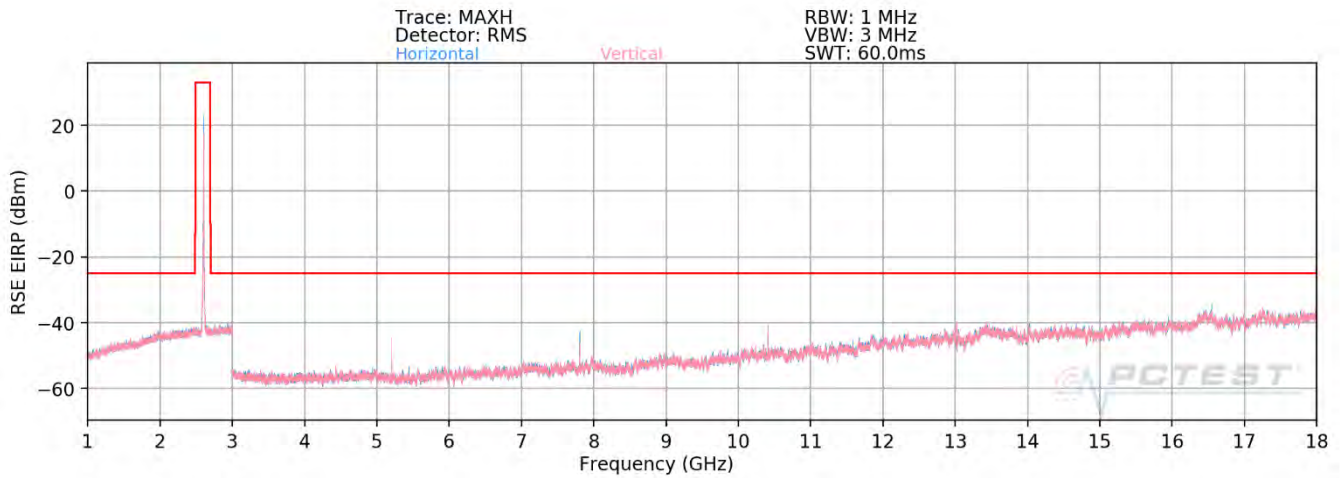

Plot 7-754. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 41 Low Channel – PCC/SCC: 1RB)

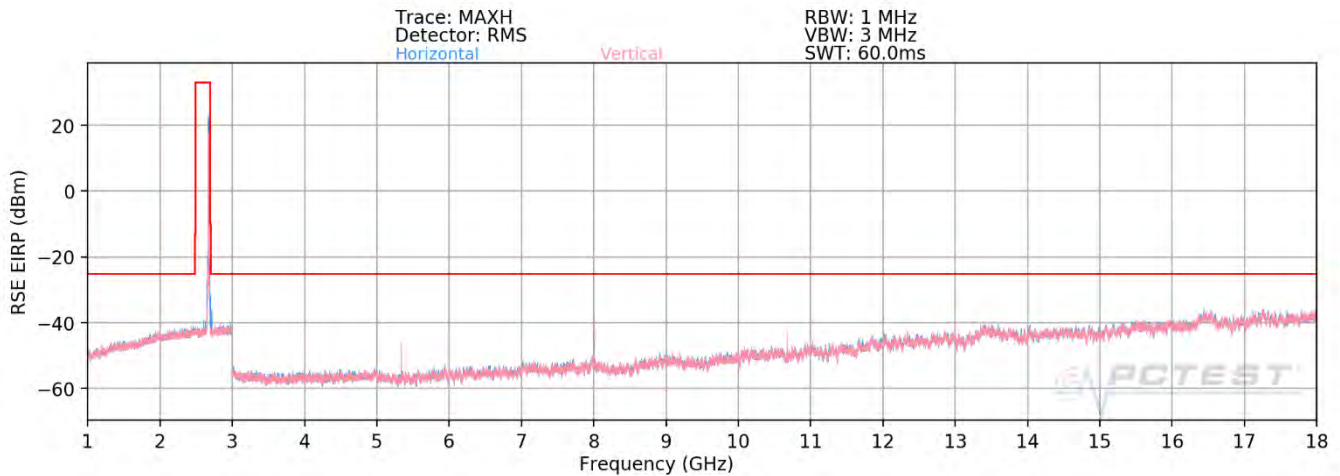

Plot 7-755. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 41 Mid Channel – PCC/SCC: 1RB)



Plot 7-756. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 41 High Channel – PCC/SCC: 1RB)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 460 of 494

OPERATING FREQUENCY (PCC): 2506.00 MHz
 OPERATING FREQUENCY (SCC): 2525.80 MHz
 CHANNEL (PCC): 39750
 CHANNEL (SCC): 39948
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5012.00	V	103	167	-45.74	8.56	-37.18	-12.2
7518.00	V	101	323	-55.61	8.49	-47.12	-22.1
10024.00	V	108	36	-53.80	9.85	-43.95	-18.9
12530.00	V	103	178	-47.97	9.07	-38.90	-13.9
15036.00	V	114	49	-47.17	8.77	-38.40	-13.4
17542.00	V	-	-	-44.15	7.64	-36.51	-11.5

Plot 7-75. Radiated Spurious Plot (ULCA B41 Left Carrier: RB 1 Offset 99, Right Carrier: RB 1 Offset 0)

OPERATING FREQUENCY (PCC): 2593.00 MHz
 OPERATING FREQUENCY (SCC): 2612.80 MHz
 CHANNEL (PCC): 40620
 CHANNEL (SCC): 40818
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5186.00	V	101	152	-49.24	8.70	-40.54	-15.5
7779.00	V	109	36	-52.48	8.69	-43.79	-18.8
10372.00	V	100	16	-48.89	9.62	-39.27	-14.3
12965.00	V	101	158	-45.93	8.99	-36.94	-11.9
15558.00	V	107	79	-46.93	8.32	-38.60	-13.6

Plot 7-76. Radiated Spurious Plot (ULCA B41 Left Carrier: RB 100 Offset 0, Right Carrier: RB 100 Offset 0)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 461 of 494

OPERATING FREQUENCY (PCC): 2680.00 MHz
 OPERATING FREQUENCY (SCC): 2660.20 MHz
 CHANNEL (PCC): 41490
 CHANNEL (SCC): 41292
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5360.00	V	101	147	-52.13	8.70	-43.44	-18.4
8040.00	V	113	277	-46.22	8.95	-37.27	-12.3
10720.00	V	102	39	-50.41	9.32	-41.09	-16.1
13400.00	V	121	37	-46.41	8.77	-37.64	-12.6
16080.00	V	107	68	-44.02	8.01	-36.01	-11.0

Plot 7-77. Radiated Spurious Data (ULCA B41 Left Carrier: RB 1 Offset 0, Right Carrier: RB 1 Offset 99)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 462 of 494	

7.10 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 463 of 494

Band 71 Frequency Stability Measurements



OPERATING FREQUENCY: 680,500,000 Hz
 CHANNEL: _____
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	680,500,081	81	0.0000119
100 %		- 20	680,500,233	233	0.0000342
100 %		- 10	680,500,118	118	0.0000173
100 %		0	680,500,167	167	0.0000245
100 %		+ 10	680,499,755	-245	-0.0000360
100 %		+ 20	680,500,024	24	0.0000035
100 %		+ 30	680,499,966	-34	-0.0000050
100 %		+ 40	680,500,007	7	0.0000010
100 %		+ 50	680,500,037	37	0.0000054
85 %		+ 20	680,500,292	292	0.0000429

Table 7-78. Frequency Stability Data (Band 71)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 464 of 494	

Band 71 Frequency Stability Measurements

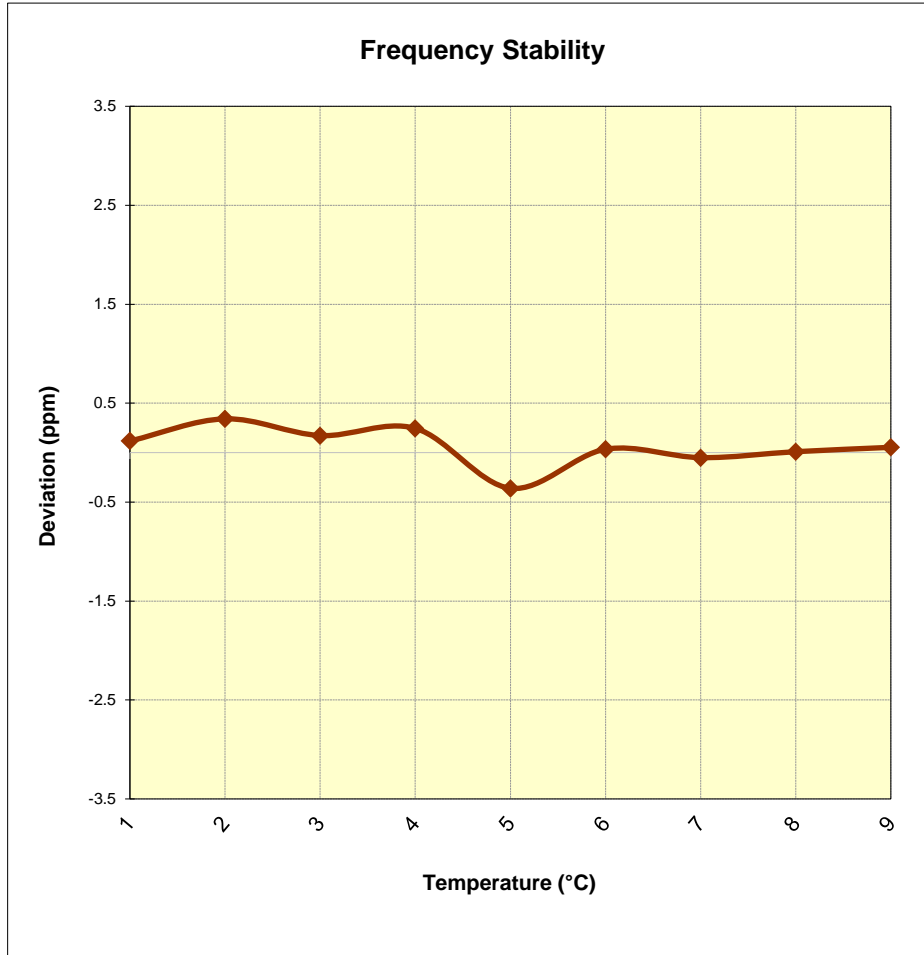


Figure 7-10. Frequency Stability Graph (Band 71)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 465 of 494

Band n71 Frequency Stability Measurements

OPERATING FREQUENCY: 680,500,000 Hz
 CHANNEL: _____
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	680,499,821	-179	-0.0000263
100 %		- 20	680,500,333	333	0.0000489
100 %		- 10	680,500,270	270	0.0000397
100 %		0	680,499,870	-130	-0.0000191
100 %		+ 10	680,500,378	378	0.0000555
100 %		+ 20	680,500,042	42	0.0000062
100 %		+ 30	680,499,722	-278	-0.0000409
100 %		+ 40	680,499,989	-11	-0.0000016
100 %		+ 50	680,499,703	-297	-0.0000436
BATT. ENDPOINT			+ 20	680,500,084	84

Table 7-79. Frequency Stability Data (Band n71)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 466 of 494	

Band n71 Frequency Stability Measurements

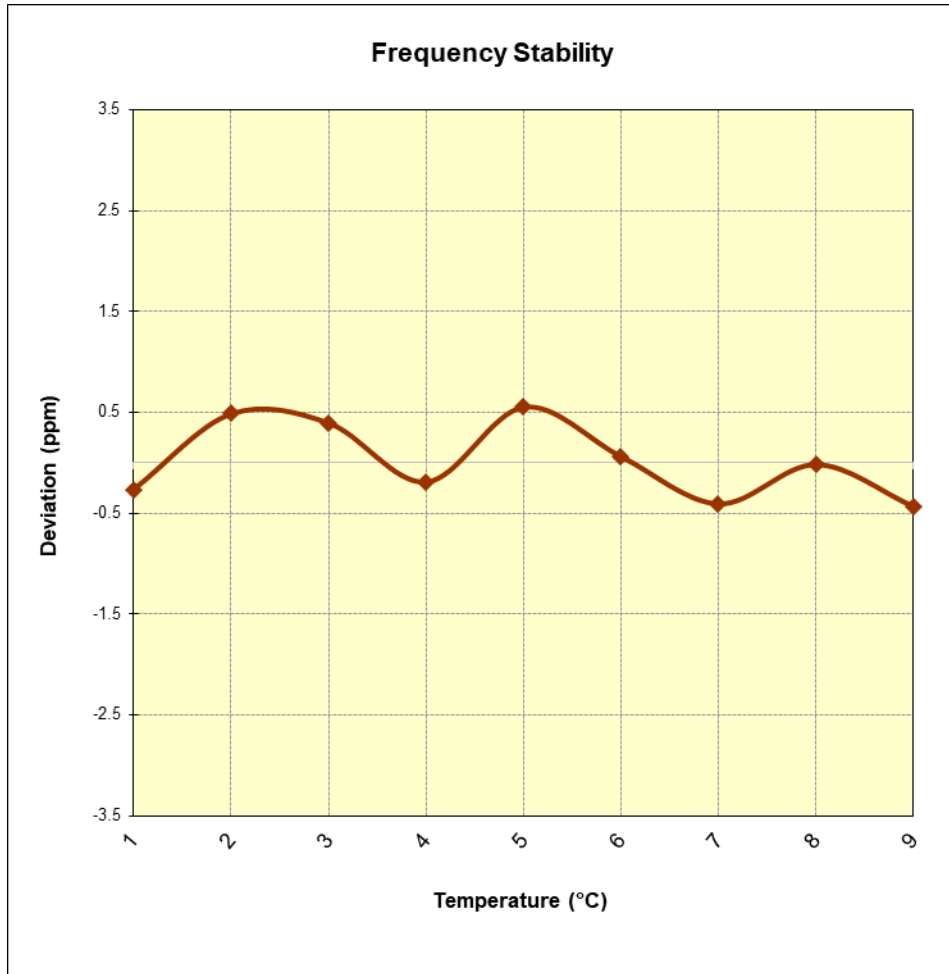


Figure 7-11. Frequency Stability Graph (Band n71)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 467 of 494

Band 12 Frequency Stability Measurements



OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	707,500,067	67	0.0000095
100 %		- 20	707,499,985	-15	-0.0000021
100 %		- 10	707,499,731	-269	-0.0000380
100 %		0	707,499,864	-136	-0.0000192
100 %		+ 10	707,500,215	215	0.0000304
100 %		+ 20	707,499,939	-61	-0.0000086
100 %		+ 30	707,499,895	-105	-0.0000148
100 %		+ 40	707,499,712	-288	-0.0000407
100 %		+ 50	707,500,017	17	0.0000024
BATT. ENDPOINT		2.84	+ 20	707,499,884	-116

Table 7-80. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 468 of 494	

Band 12 Frequency Stability Measurements

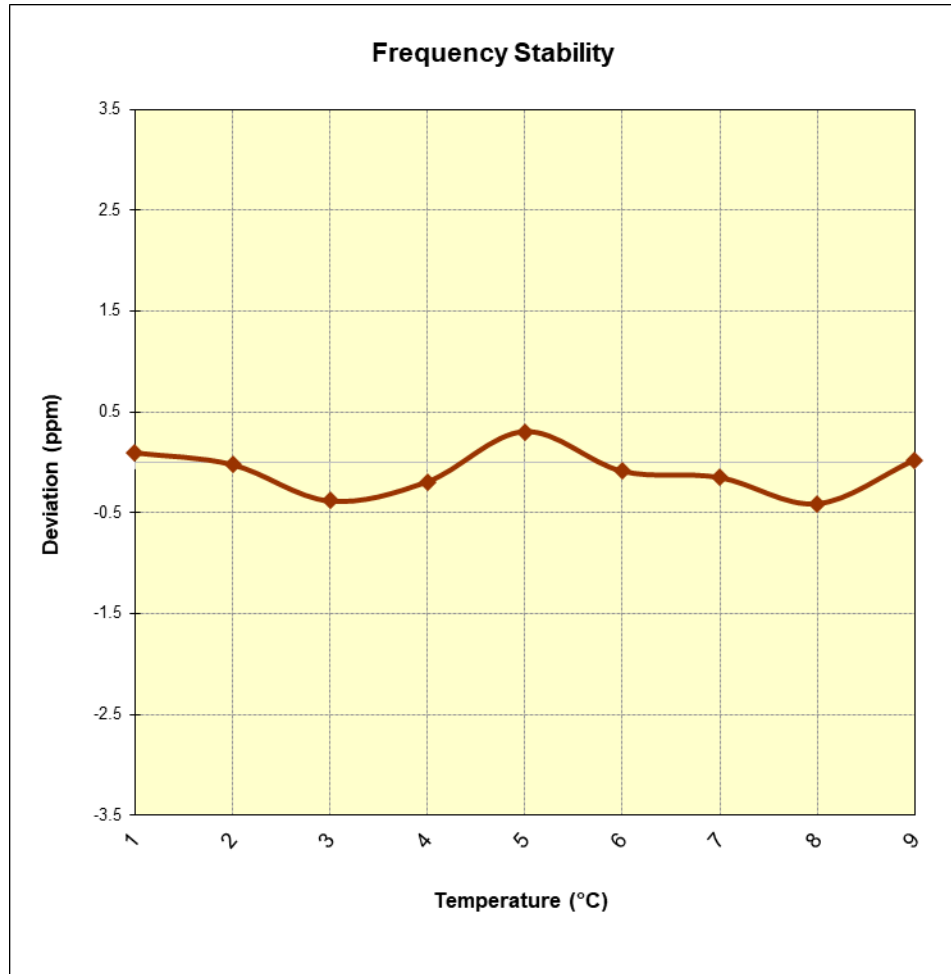


Figure 7-12. Frequency Stability Graph (Band 12)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 469 of 494

Band n12 Frequency Stability Measurements

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	707,500,310	310	0.0000438
100 %		- 20	707,499,706	-294	-0.0000416
100 %		- 10	707,500,196	196	0.0000277
100 %		0	707,499,891	-109	-0.0000154
100 %		+ 10	707,499,983	-17	-0.0000024
100 %		+ 20	707,499,959	-41	-0.0000058
100 %		+ 30	707,499,754	-246	-0.0000348
100 %		+ 40	707,499,798	-202	-0.0000286
100 %		+ 50	707,499,970	-30	-0.0000042
BATT. ENDPOINT			+ 20	707,499,977	-23

Table 7-81. Frequency Stability Data (Band n12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 470 of 494

Band n12 Frequency Stability Measurements

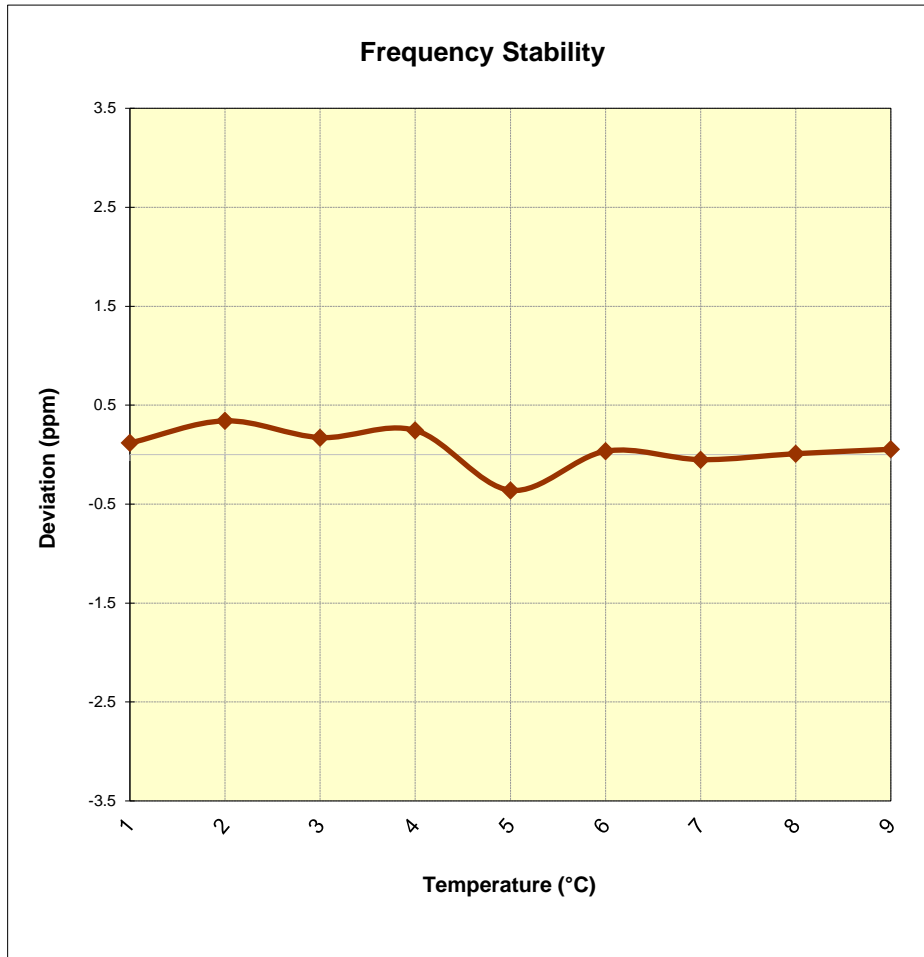


Figure 7-13. Frequency Stability Graph (Band n12)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 471 of 494

Band 13 Frequency Stability Measurements



OPERATING FREQUENCY: 782,000,000 Hz
 CHANNEL: 23230
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	782,000,188	188	0.0000240
100 %		- 20	781,999,798	-202	-0.0000258
100 %		- 10	782,000,091	91	0.0000116
100 %		0	782,000,038	38	0.0000049
100 %		+ 10	782,000,155	155	0.0000198
100 %		+ 20	782,000,143	143	0.0000183
100 %		+ 30	781,999,884	-116	-0.0000148
100 %		+ 40	782,000,013	13	0.0000017
100 %		+ 50	781,999,815	-185	-0.0000237
BATT. ENDPOINT		2.84	+ 20	781,999,863	-137

Table 7-82. Frequency Stability Data (Band 13)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 472 of 494	

Band 13 Frequency Stability Measurements

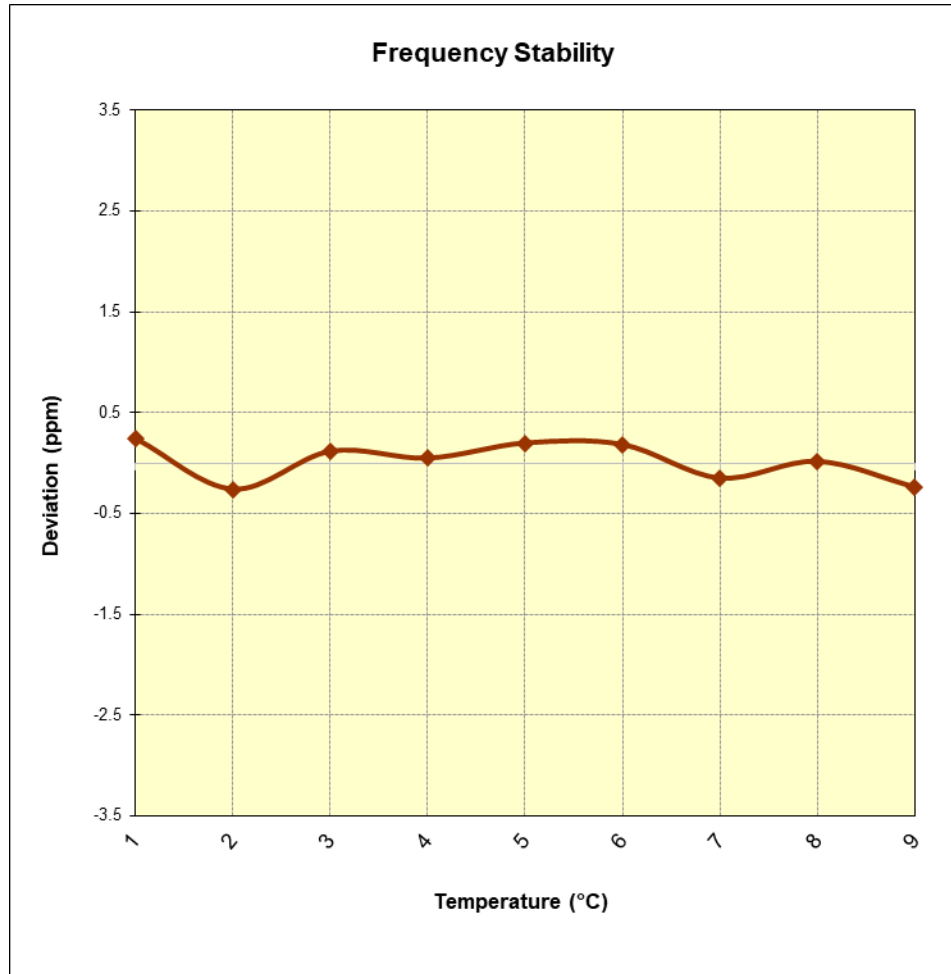


Figure 7-14. Frequency Stability Graph (Band 13)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 473 of 494

Band 26/5 Frequency Stability Measurements

OPERATING FREQUENCY: 831,500,000 Hz
 CHANNEL: 26865
 REFERENCE VOLTAGE: 4.21 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	831,500,002	2	0.0000002
100 %		- 20	831,500,361	361	0.0000434
100 %		- 10	831,500,151	151	0.0000182
100 %		0	831,499,900	-100	-0.0000120
100 %		+ 10	831,499,897	-103	-0.0000124
100 %		+ 20	831,499,938	-62	-0.0000075
100 %		+ 30	831,500,261	261	0.0000314
100 %		+ 40	831,500,274	274	0.0000330
100 %		+ 50	831,500,061	61	0.0000073
BATT. ENDPOINT		2.84	+ 20	831,500,183	183

Table 7-83. Frequency Stability Data (Band 26/5)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 474 of 494	

Band 26/5 Frequency Stability Measurements

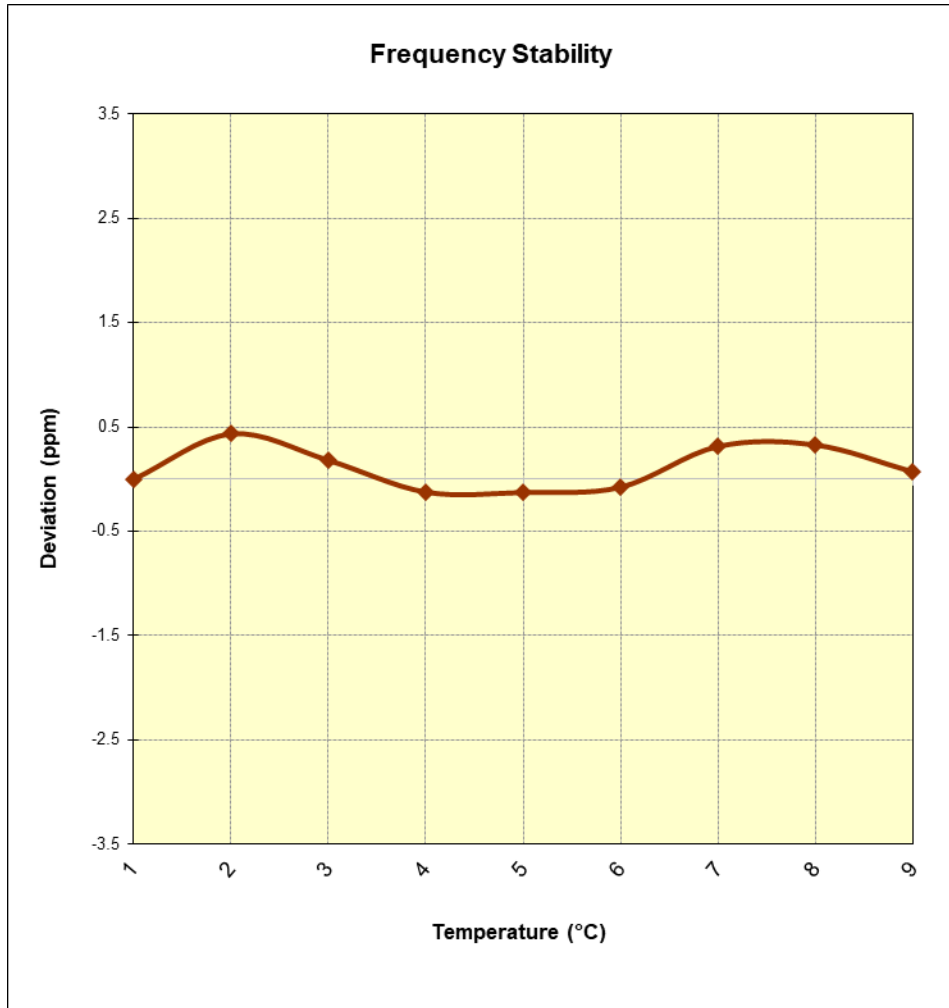


Figure 7-15. Frequency Stability Graph (Band 26/5)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 475 of 494	

Band n5 Frequency Stability Measurements



OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 4.21 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	836,499,920	-80	-0.0000096
100 %		- 20	836,500,052	52	0.0000062
100 %		- 10	836,500,012	12	0.0000014
100 %		0	836,499,973	-27	-0.0000032
100 %		+ 10	836,499,968	-32	-0.0000038
100 %		+ 20	836,500,109	109	0.0000130
100 %		+ 30	836,499,824	-176	-0.0000210
100 %		+ 40	836,500,333	333	0.0000398
100 %		+ 50	836,500,009	9	0.0000011
BATT. ENDPOINT			+ 20	836,500,029	29

Table 7-84. Frequency Stability Data (Band n5)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 476 of 494	

Band n5 Frequency Stability Measurements

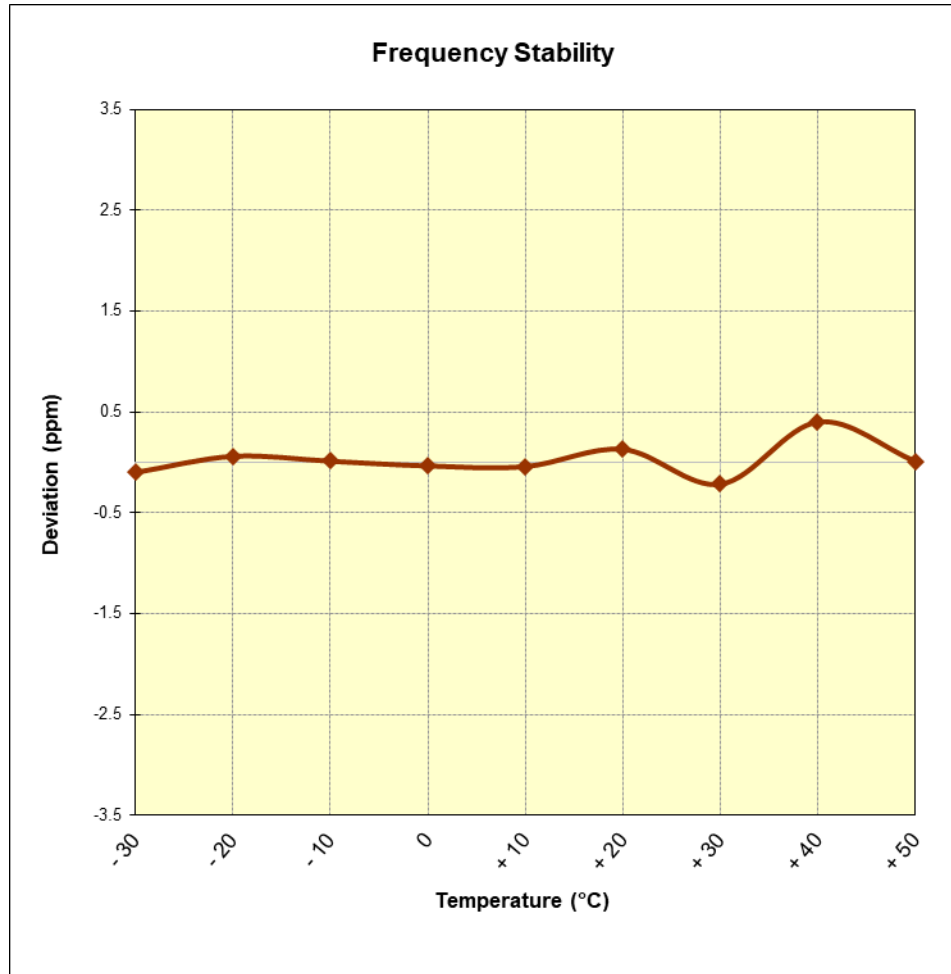


Figure 7-16. Frequency Stability Graph (Band n5)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 477 of 494

Band 66/4 Frequency Stability Measurements



OPERATING FREQUENCY: 1,745,000,000 Hz
 CHANNEL: 132322
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	1,744,999,689	-311	-0.0000178
100 %		- 20	1,744,999,624	-376	-0.0000215
100 %		- 10	1,744,999,871	-129	-0.0000074
100 %		0	1,745,000,009	9	0.0000005
100 %		+ 10	1,745,000,013	13	0.0000007
100 %		+ 20	1,745,000,277	277	0.0000159
100 %		+ 30	1,745,000,038	38	0.0000022
100 %		+ 40	1,744,999,960	-40	-0.0000023
100 %		+ 50	1,745,000,113	113	0.0000065
BATT. ENDPOINT		2.84	+ 20	1,745,000,215	215

Table 7-85. Frequency Stability Data (Band 66/4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 478 of 494	

Band 66/4 Frequency Stability Measurements

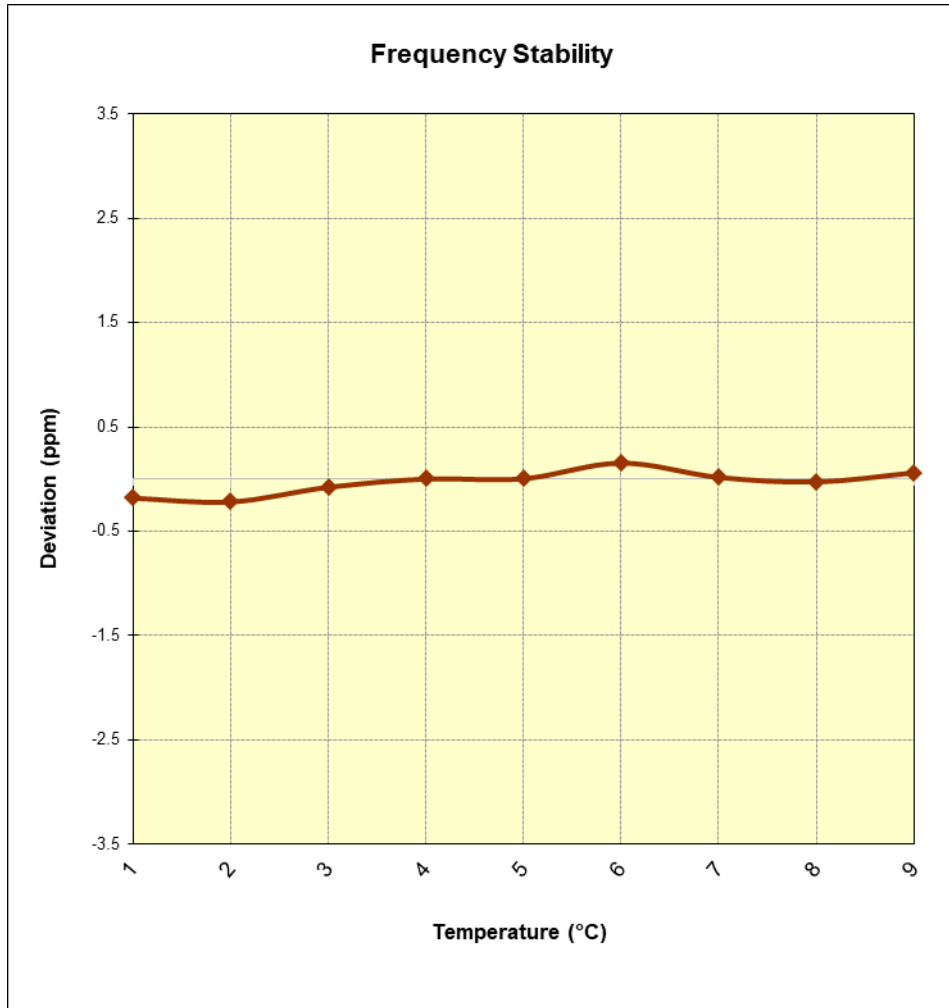


Figure 7-17. Frequency Stability Graph (Band 66/4)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 479 of 494	

Band n66 Frequency Stability Measurements



OPERATING FREQUENCY: 1,745,000,000 Hz
 CHANNEL: 132322
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)	
100 %	4.21	- 30	1,744,999,943	-57	-0.0000033	
100 %		- 20	1,744,999,861	-139	-0.0000080	
100 %		- 10	1,744,999,794	-206	-0.0000118	
100 %		0	1,745,000,064	64	0.0000037	
100 %		+ 10	1,744,999,812	-188	-0.0000108	
100 %		+ 20	1,745,000,356	356	0.0000204	
100 %		+ 30	1,744,999,713	-287	-0.0000164	
100 %		+ 40	1,745,000,198	198	0.0000113	
100 %		+ 50	1,744,999,932	-68	-0.0000039	
BATT. ENDPOINT			+ 20	1,744,999,776	-224	-0.0000128

Table 7-86. Frequency Stability Data (Band n66)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 480 of 494

Band n66 Frequency Stability Measurements

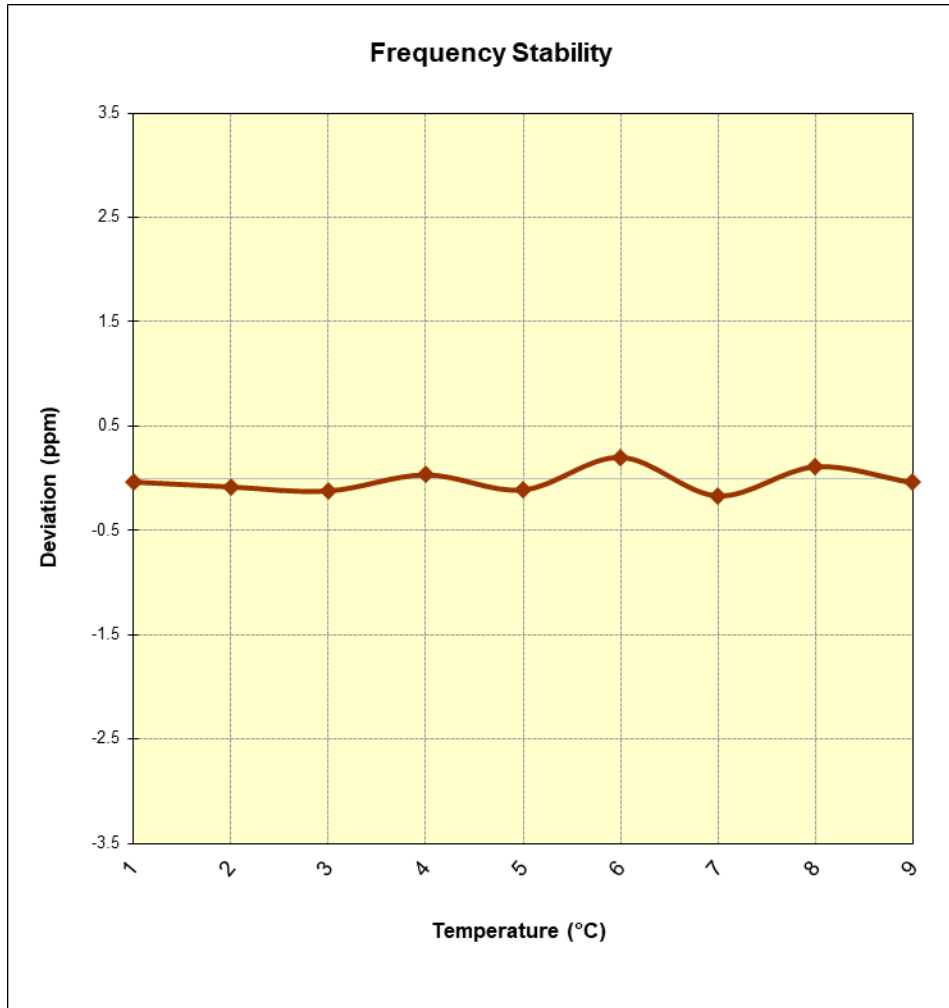


Figure 7-18. Frequency Stability Graph (Band n66)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 481 of 494	

Band 25/2 Frequency Stability Measurements



OPERATING FREQUENCY: 1,882,500,000 Hz
 CHANNEL: 26365
 REFERENCE VOLTAGE: 4.21 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	1,882,500,098	98	0.0000052
100 %		- 20	1,882,499,765	-235	-0.0000125
100 %		- 10	1,882,499,994	-6	-0.0000003
100 %		0	1,882,500,212	212	0.0000113
100 %		+ 10	1,882,499,989	-11	-0.0000006
100 %		+ 20	1,882,499,699	-301	-0.0000160
100 %		+ 30	1,882,500,122	122	0.0000065
100 %		+ 40	1,882,499,929	-71	-0.0000038
100 %		+ 50	1,882,499,631	-369	-0.0000196
BATT. ENDPOINT		2.84	+ 20	1,882,499,638	-362

Table 7-87. Frequency Stability Data (Band 25/2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 482 of 494	

Band 25/2 Frequency Stability Measurements

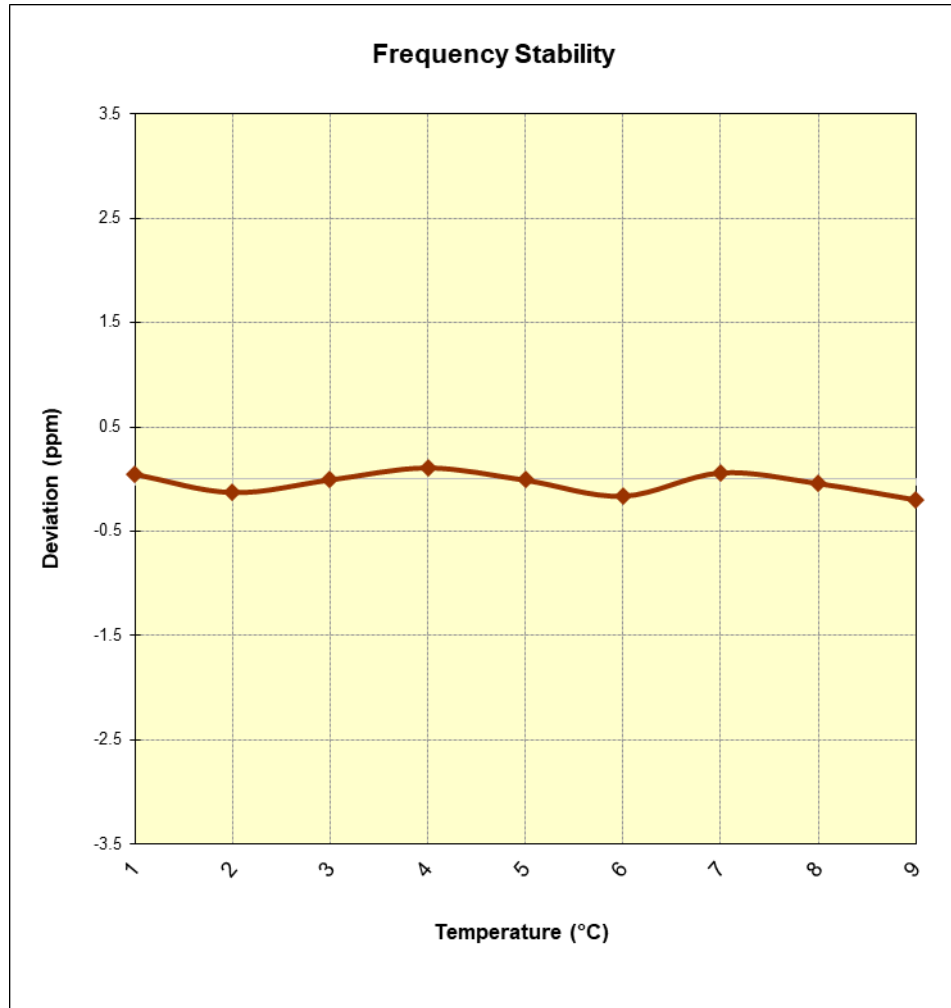


Figure 7-19. Frequency Stability Graph (Band 25/2)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 483 of 494

Band n25/2 Frequency Stability Measurements



OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 4.21 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	1,880,000,160	160	0.0000085
100 %		- 20	1,879,999,703	-297	-0.0000158
100 %		- 10	1,880,000,329	329	0.0000175
100 %		0	1,880,000,352	352	0.0000187
100 %		+ 10	1,879,999,776	-224	-0.0000119
100 %		+ 20	1,879,999,875	-125	-0.0000066
100 %		+ 30	1,880,000,021	21	0.0000011
100 %		+ 40	1,879,999,978	-22	-0.0000012
100 %		+ 50	1,880,000,088	88	0.0000047
BATT. ENDPOINT			+ 20	1,879,999,785	-215

Table 7-88. Frequency Stability Data (Band n25/2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 484 of 494

Band n25/2 Frequency Stability Measurements

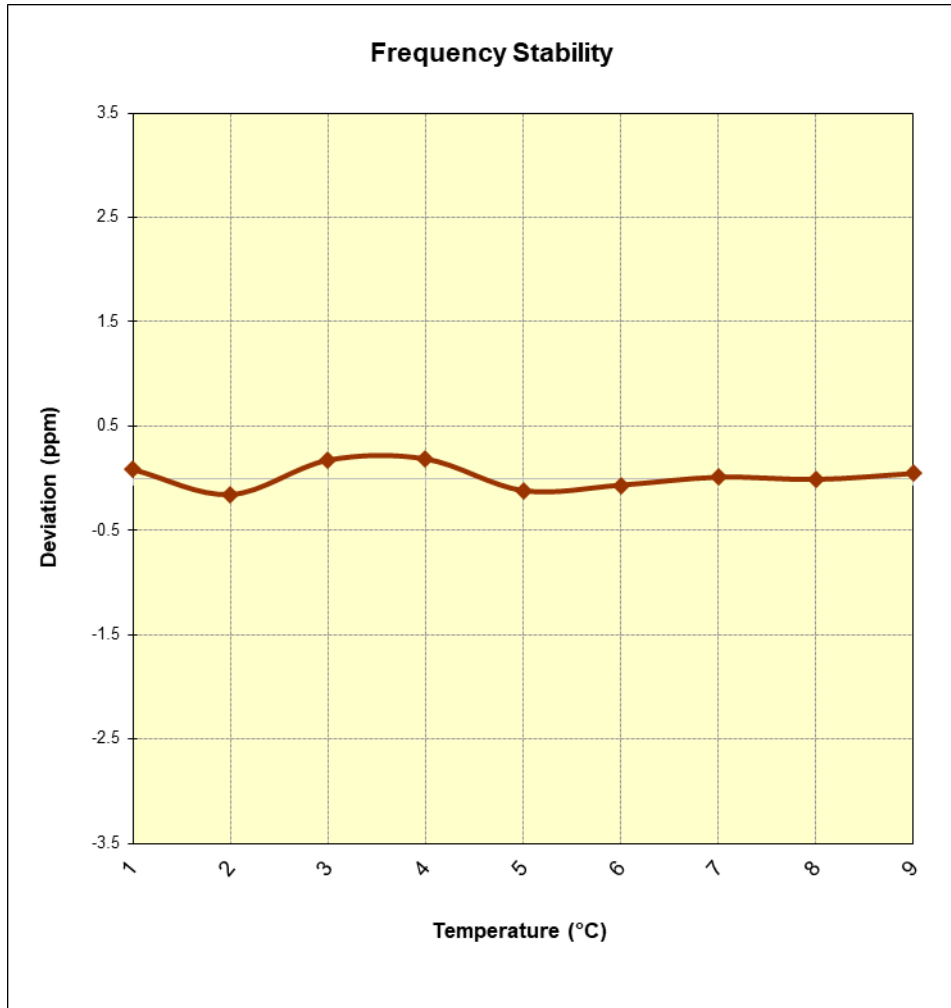


Figure 7-20. Frequency Stability Graph (Band n25/2)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 485 of 494	

Band 30 Frequency Stability Measurements


OPERATING FREQUENCY: 2,310,000,000 Hz
 CHANNEL: 27710
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	2,309,999,963	-37	-0.0000016
100 %		- 20	2,310,000,071	71	0.0000031
100 %		- 10	2,310,000,334	334	0.0000145
100 %		0	2,309,999,918	-82	-0.0000035
100 %		+ 10	2,309,999,932	-68	-0.0000029
100 %		+ 20	2,309,999,867	-133	-0.0000058
100 %		+ 30	2,310,000,006	6	0.0000003
100 %		+ 40	2,309,999,811	-189	-0.0000082
100 %		+ 50	2,309,999,851	-149	-0.0000065
BATT. ENDPOINT		2.84	+ 20	2,309,999,572	-428

Table 7-89. Frequency Stability Data (Band 30)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 486 of 494	

Band 30 Frequency Stability Measurements

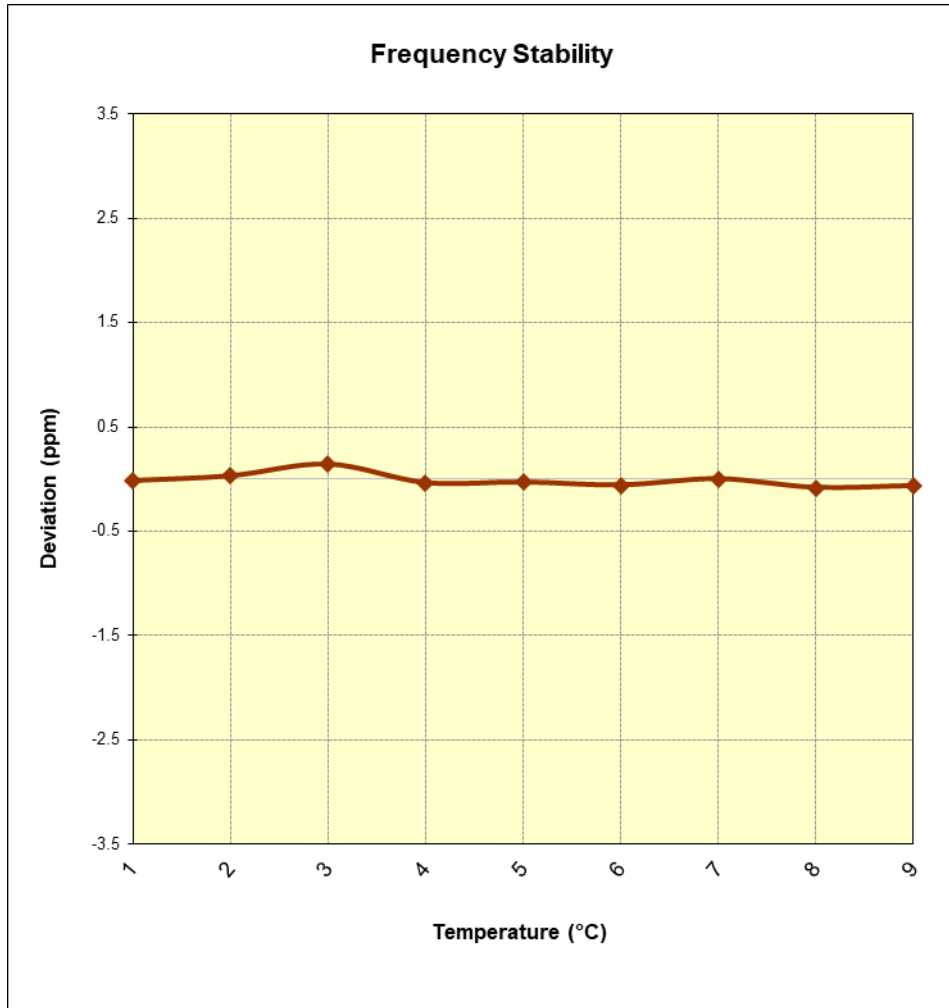


Figure 7-21. Frequency Stability Graph (Band 30)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 487 of 494

Band 41 Frequency Stability Measurements



OPERATING FREQUENCY: 2,593,000,000 Hz
 CHANNEL: 40620
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	2,593,000,002	2	0.0000001
100 %		- 20	2,593,000,316	316	0.0000122
100 %		- 10	2,592,999,663	-337	-0.0000130
100 %		0	2,592,999,984	-16	-0.0000006
100 %		+ 10	2,593,000,178	178	0.0000069
100 %		+ 20	2,593,000,467	467	0.0000180
100 %		+ 30	2,592,999,920	-80	-0.0000031
100 %		+ 40	2,592,999,693	-307	-0.0000118
100 %		+ 50	2,593,000,293	293	0.0000113
BATT. ENDPOINT		2.84	+ 20	2,593,000,023	23

Table 7-90. Frequency Stability Data (Band 41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 488 of 494	

Band 41 Frequency Stability Measurements

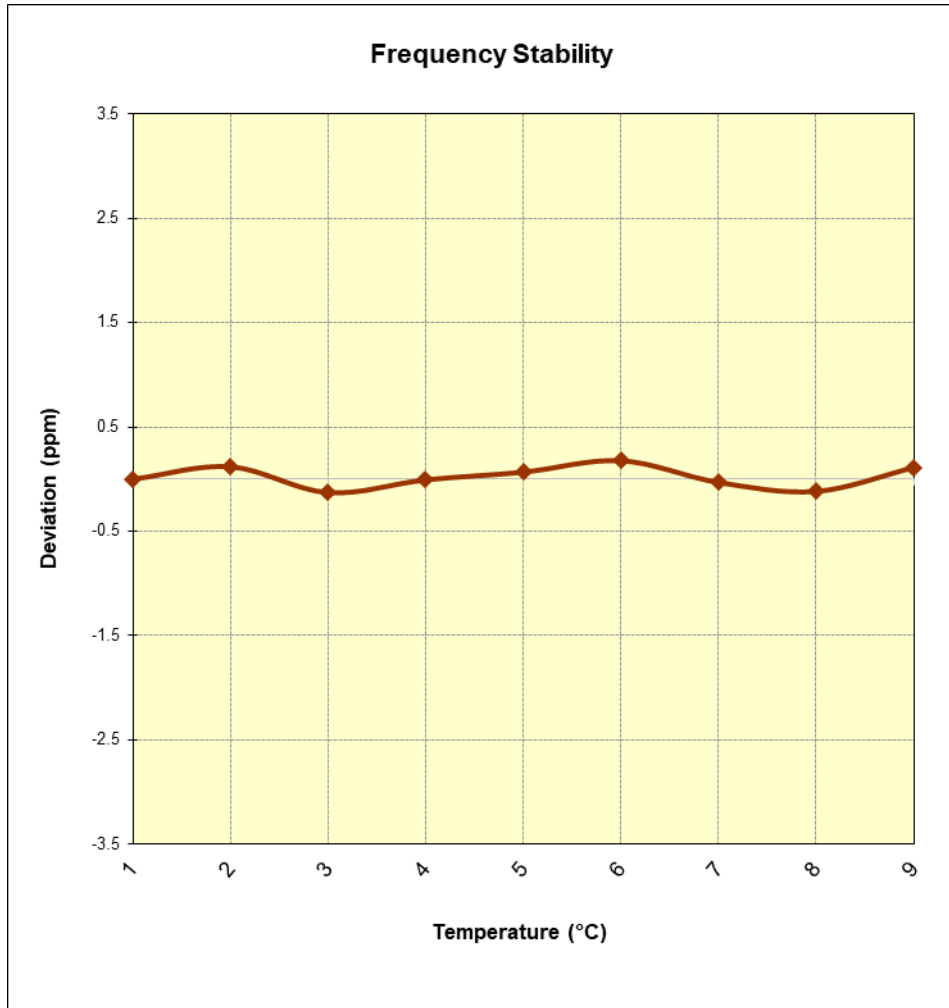


Figure 7-22. Frequency Stability Graph (Band 41)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 489 of 494	

Band n41 Frequency Stability Measurements



OPERATING FREQUENCY: 2,593,000,000 Hz
 CHANNEL: 40620
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	2,593,000,026	26	0.0000010
100 %		- 20	2,593,000,069	69	0.0000027
100 %		- 10	2,592,999,853	-147	-0.0000057
100 %		0	2,593,000,285	285	0.0000110
100 %		+ 10	2,593,000,362	362	0.0000140
100 %		+ 20	2,593,000,095	95	0.0000037
100 %		+ 30	2,592,999,837	-163	-0.0000063
100 %		+ 40	2,592,999,933	-67	-0.0000026
100 %		+ 50	2,592,999,866	-134	-0.0000052
BATT. ENDPOINT			+ 20	2,592,999,967	-33

Table 7-91. Frequency Stability Data (Band n41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 490 of 494

Band n41 Frequency Stability Measurements

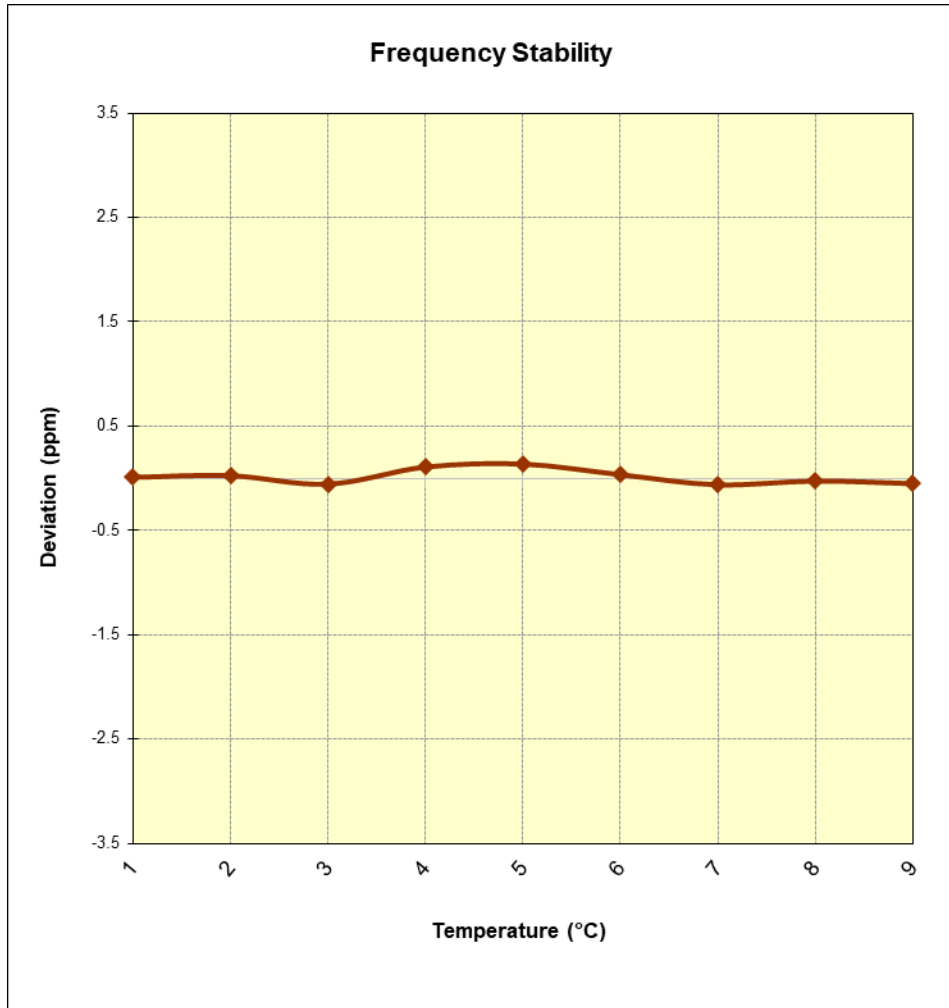


Figure 7-23. Frequency Stability Graph (Band n41)

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 491 of 494

Band 7 Frequency Stability Measurements



OPERATING FREQUENCY: 2,535,000,000 Hz
 CHANNEL: 21100
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	2,535,000,023	23	0.0000009
100 %		- 20	2,535,000,197	197	0.0000078
100 %		- 10	2,535,000,099	99	0.0000039
100 %		0	2,535,000,081	81	0.0000032
100 %		+ 10	2,534,999,768	-232	-0.0000092
100 %		+ 20	2,534,999,939	-61	-0.0000024
100 %		+ 30	2,534,999,942	-58	-0.0000023
100 %		+ 40	2,534,999,719	-281	-0.0000111
100 %		+ 50	2,535,000,169	169	0.0000067
BATT. ENDPOINT		2.84	+ 20	2,535,000,138	138

Table 7-92. Frequency Stability Data (Band 7)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 492 of 494

Band 7 Frequency Stability Measurements

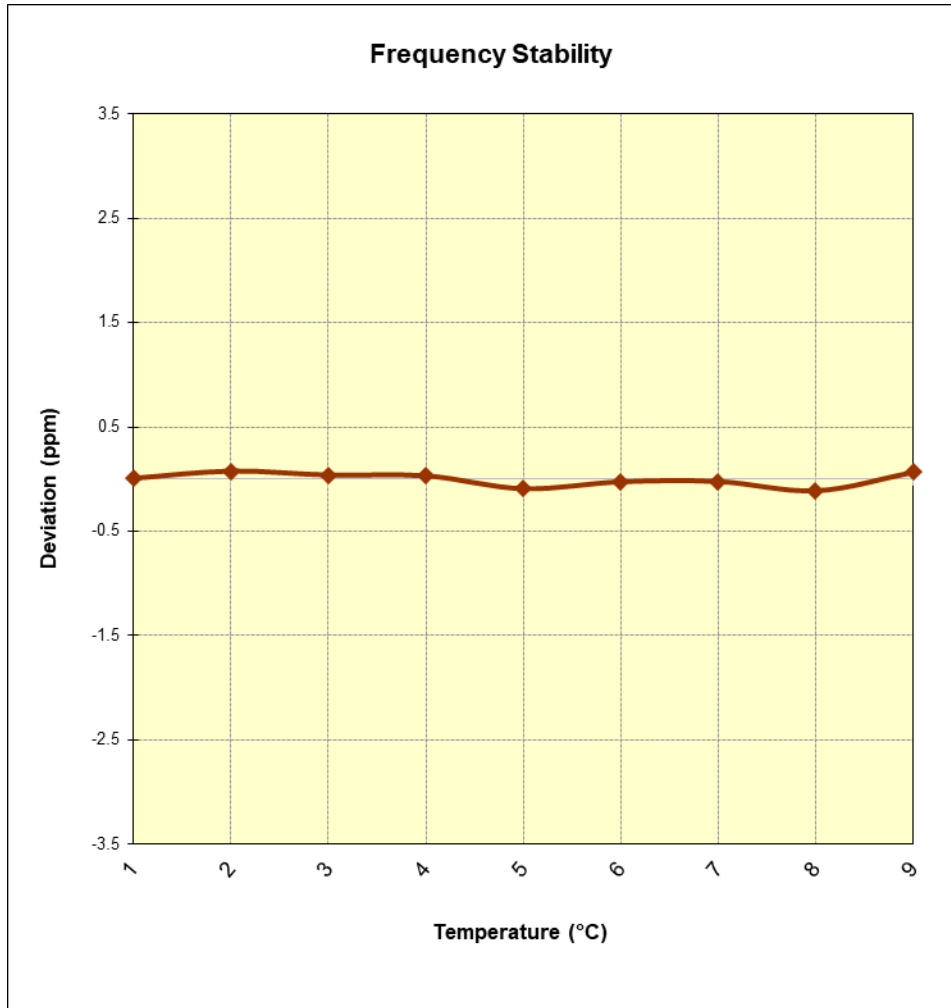


Figure 7-24. Frequency Stability Graph (Band 7)

FCC ID: A3LSMN986U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset		Page 493 of 494

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset** **FCC ID: A3LSMN986U** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules for LTE operation only.

FCC ID: A3LSMN986U		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2004170065-03-R3.A3L	Test Dates: 4/17 - 6/22/2020	EUT Type: Portable Handset	Page 494 of 494