

Head Tissue Simulating Liquids

Head Tissue	Parameters according to IEEE Std 1528-2013 / IEC 62209 / FCC KDB 865664 D01		
Narrow-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	HSL300V2	300	Water, Sugar
	HSL450V2	450	Water, Sugar
	HSL750V2	750	Water, Sugar
	HSL900V2	835, 900	Water, Sugar
	HSL1450V2	1450, 1500, 1640	Water, DGBE
	HSL1750V2	1750	Water, DGBE
	HSL1800V2	1800, 1900	Water, DGBE
	HSL1900V2	1900	Water, DGBE
	HSL1950V2	1950, 2000	Water, DGBE
HSL2450V2	2450, 2600	Water, DGBE	
Broad-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	HBBL30-250V3	30-250	Water, Tween
	HBBL1350-1850V3	1400-1800	Water, Tween
	HBBL1550-1950V3	1750-1900	Water, Tween
	HBBL1900-3800V3	1950-3000	Water, Tween
HBBL3500-5800V5	3500-5800	Water, Oil	

Body Tissue Simulating Liquids

Body Tissue (Muscle)	Parameters according to FCC KDB 865664 D01		
Narrow-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	MSL300V2	300	Water, Sugar
	MSL450V2	400, 450	Water, Sugar
	MSL750V2	750	Water, Sugar
	MSL900V2	835, 900	Water, Sugar
	MSL1450V2	1450, 1500, 1640	Water, DGBE
	MSL1750V2	1750	Water, DGBE
	MSL1800V2	1800, 1900	Water, DGBE
	MSL1900V2	1900	Water, DGBE
	MSL1950V2	1950, 2100	Water, DGBE
MSL2450V2	2450, 2600	Water, DGBE	
Broad-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	MBBL130-250V3	130-250	Water, Tween
	MBBL1350-1850V3	1350-1800	Water, Tween
	MBBL1550-1950V3	1550-1850	Water, Tween
	MBBL1900-3800V3	1950-3800	Water, Tween
MBBL3500-5800V5	3500-5800	Water, Oil	

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MSL750V2)
Product No.	SL AAM 075 AA (Charge: 140729-3)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	30-Jul-14
Operator	CL

Additional Information

TSL Density	1.212 g/cm ³
TSL Heat-capacity	3.006 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
600	57.4	25.30	0.84	56.1	0.95	2.2	-11.3
625	57.1	24.93	0.87	56.0	0.95	2.0	-9.2
650	56.9	24.55	0.89	55.9	0.96	1.7	-7.1
675	56.6	24.23	0.91	55.8	0.96	1.4	-5.0
700	56.3	23.90	0.93	55.7	0.96	1.0	-3.0
725	56.1	23.66	0.95	55.6	0.96	0.8	-0.8
750	55.8	23.41	0.98	55.5	0.96	0.6	1.4
775	55.6	23.20	1.00	55.4	0.97	0.3	3.6
800	55.3	22.99	1.02	55.3	0.97	0.0	5.8
825	55.1	22.83	1.05	55.2	0.98	-0.2	7.1
838	55.0	22.74	1.06	55.2	0.98	-0.4	7.8
850	54.9	22.66	1.07	55.2	0.99	-0.5	8.4
875	54.7	22.51	1.10	55.1	1.02	-0.8	7.5
900	54.4	22.35	1.12	55.0	1.05	-1.1	6.6
925	54.2	22.22	1.14	55.0	1.06	-1.4	7.6
950	54.0	22.09	1.17	54.9	1.08	-1.7	8.5
975	53.8	21.99	1.19	54.9	1.09	-2.0	9.7
1000	53.6	21.90	1.22	54.8	1.10	-2.3	11.0

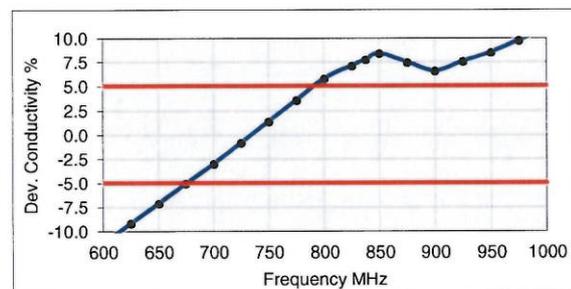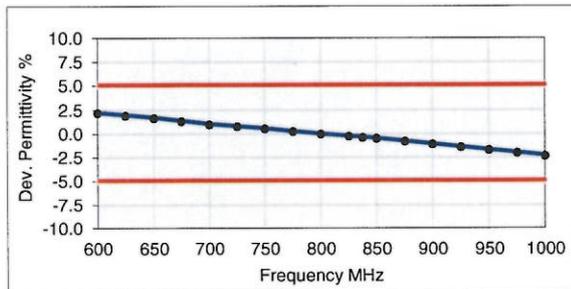

Measurement Certificate / Material Test

Item Name **Body Tissue Simulating Liquid (MSL900V2)**
 Product No. SL AAM 090 CA (Charge: 140710-1)
 Manufacturer SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient Environment temperatur (22 ± 3)°C and humidity < 70%.
 TSL Temperature 22°C
 Test Date 16-Jul-14
 Operator IEN

Additional Information

TSL Density 1.208 g/cm3
 TSL Heat-capacity 3.113 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
700	56.6	22.41	0.87	55.7	0.96	1.6	-9.0
725	56.4	22.23	0.90	55.6	0.96	1.3	-6.8
750	56.1	22.04	0.92	55.5	0.96	1.1	-4.5
775	55.9	21.88	0.94	55.4	0.97	0.8	-2.3
800	55.6	21.72	0.97	55.3	0.97	0.5	-0.1
825	55.4	21.59	0.99	55.2	0.98	0.3	1.3
838	55.3	21.52	1.00	55.2	0.98	0.2	2.0
850	55.2	21.46	1.01	55.2	0.99	0.0	2.6
875	54.9	21.35	1.04	55.1	1.02	-0.2	2.0
900	54.7	21.25	1.06	55.0	1.05	-0.5	1.3
925	54.5	21.17	1.09	55.0	1.06	-0.9	2.5
950	54.3	21.08	1.11	54.9	1.08	-1.2	3.6
975	54.1	21.01	1.14	54.9	1.09	-1.5	4.9
1000	53.8	20.95	1.17	54.8	1.10	-1.8	6.1
1025	53.6	20.88	1.19	54.8	1.11	-2.1	7.3
1050	53.4	20.81	1.22	54.7	1.12	-2.4	8.5
1075	53.2	20.79	1.24	54.7	1.13	-2.7	9.8
1100	53.0	20.76	1.27	54.7	1.14	-3.0	11.2
1125	52.8	20.71	1.30	54.6	1.15	-3.3	12.3
1150	52.6	20.66	1.32	54.6	1.17	-3.7	13.4
1175	52.4	20.64	1.35	54.5	1.18	-3.9	14.7
1200	52.2	20.63	1.38	54.5	1.19	-4.2	15.9

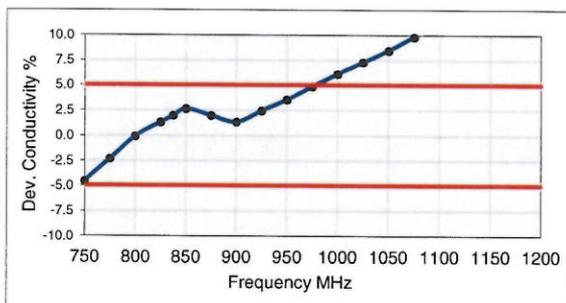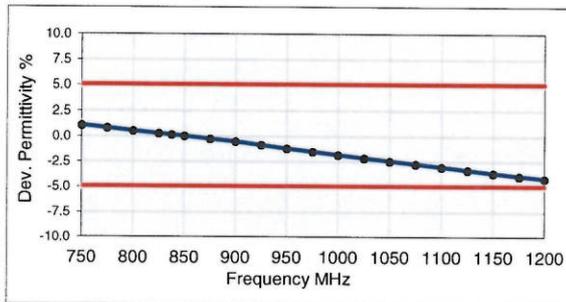

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MBBL1550-1950V3)
Product No.	SL AAM 181 AA (Charge: 140826-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	27-Aug-14
Operator	IEN

Additional Information

TSL Density	1.042 g/cm ³
TSL Heat-capacity	3.475 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
1500	53.6	14.84	1.24	53.9	1.33	-0.7	-7.0
1525	53.5	14.85	1.26	53.9	1.35	-0.8	-6.5
1550	53.4	14.85	1.28	53.9	1.36	-0.9	-6.0
1575	53.3	14.85	1.30	53.8	1.38	-1.0	-5.6
1600	53.2	14.85	1.32	53.8	1.39	-1.1	-5.1
1625	53.2	14.86	1.34	53.8	1.41	-1.1	-4.7
1650	53.1	14.87	1.36	53.7	1.43	-1.1	-4.2
1675	53.0	14.88	1.39	53.6	1.44	-1.2	-3.8
1700	52.9	14.89	1.41	53.6	1.46	-1.2	-3.3
1725	52.9	14.91	1.43	53.5	1.47	-1.2	-2.8
1750	52.8	14.93	1.45	53.4	1.49	-1.2	-2.3
1775	52.7	14.94	1.48	53.4	1.50	-1.2	-1.9
1800	52.6	14.96	1.50	53.3	1.52	-1.2	-1.5
1825	52.6	14.98	1.52	53.3	1.52	-1.4	0.1
1850	52.5	15.01	1.54	53.3	1.52	-1.5	1.6
1875	52.4	15.02	1.57	53.3	1.52	-1.6	3.1
1900	52.4	15.03	1.59	53.3	1.52	-1.8	4.5
1925	52.3	15.06	1.61	53.3	1.52	-1.9	6.1
1950	52.2	15.09	1.64	53.3	1.52	-2.0	7.7
1975	52.2	15.11	1.66	53.3	1.52	-2.1	9.2
2000	52.1	15.13	1.68	53.3	1.52	-2.2	10.7

