



FCC CFR47 PART 15 SUBPART C

DTS Wireless LAN

C2PC CERTIFICATION TEST REPORT

FOR

WCDMA/LTE Watch + Bluetooth/BLE and DTS b/g/n

MODEL NUMBER : SM-R765T, SM-R765A

FCC ID: A3LSMR765U

REPORT NUMBER: 4787713126-E1V2

ISSUE DATE: DEC 13, 2016

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	12/12/16	Initial issue	Junwhan Lee
V2	12/13/16	Addressed TCB's questions	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	7
5.2. <i>MAXIMUM OUTPUT POWER</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. MEASUREMENT METHODS	11
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	12
8.1. <i>ON TIME AND DUTY CYCLE RESULTS</i>	12
9. SUMMARY TABLE	14
10. OUTPUT POWER	15
10.1.1. 802.11b MODE IN THE 2.4 GHz BAND	16
10.1.2. 802.11g MODE IN THE 2.4 GHz BAND	17
10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	18
11. RADIATED TEST RESULTS	19
11.1. <i>LIMITS AND PROCEDURE</i>	19
11.2. <i>TRANSMITTER ABOVE 1 GHz</i>	21
11.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	21
11.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	31
11.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND	41
11.3. <i>WORST-CASE BELOW 1 GHz</i>	51
12. AC POWER LINE CONDUCTED EMISSIONS	53
13. SETUP PHOTOS	56

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: WCDMA/LTE Watch + Bluetooth/BLE and DTS b/g/n
MODEL NUMBER: SM-R765T, SM-R765A
SERIAL NUMBER: R3AH80076HN, R3AH80078JW, R3AH800781V (RADIATED)
DATE TESTED: DEC 07, 2016 - DEC 11, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a WCDMA/LTE Watch + Bluetooth/BLE and DTS b/g/n.
This test report addresses the DTS (WLAN) operational mode.

SM-R765T and SM-R765A are same H/W and only difference is supported band.
Band4 (LTE and WCDMA) of SM-R765A are disabled by S/W.
SM-R765T was used for the test.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
2412 - 2462	802.11b	16.65	46.24
	802.11g	14.53	28.38
	802.11n HT20	14.04	25.35

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antennas, with a antenna's maximum gain of -4.5 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Adapter	SAMSUNG	ETA0U60JBE	RT2H608ES/7-E	N/A
Data Cable	SAMSUNG	ECB-DU2EBE	N/A	N/A
Wireless Charger	SAMSUNG	EP-YO760	RF7HA2DVAYVCIS	A3LEPYO760


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable DTS mode.

SETUP DIAGRAM FOR TESTS

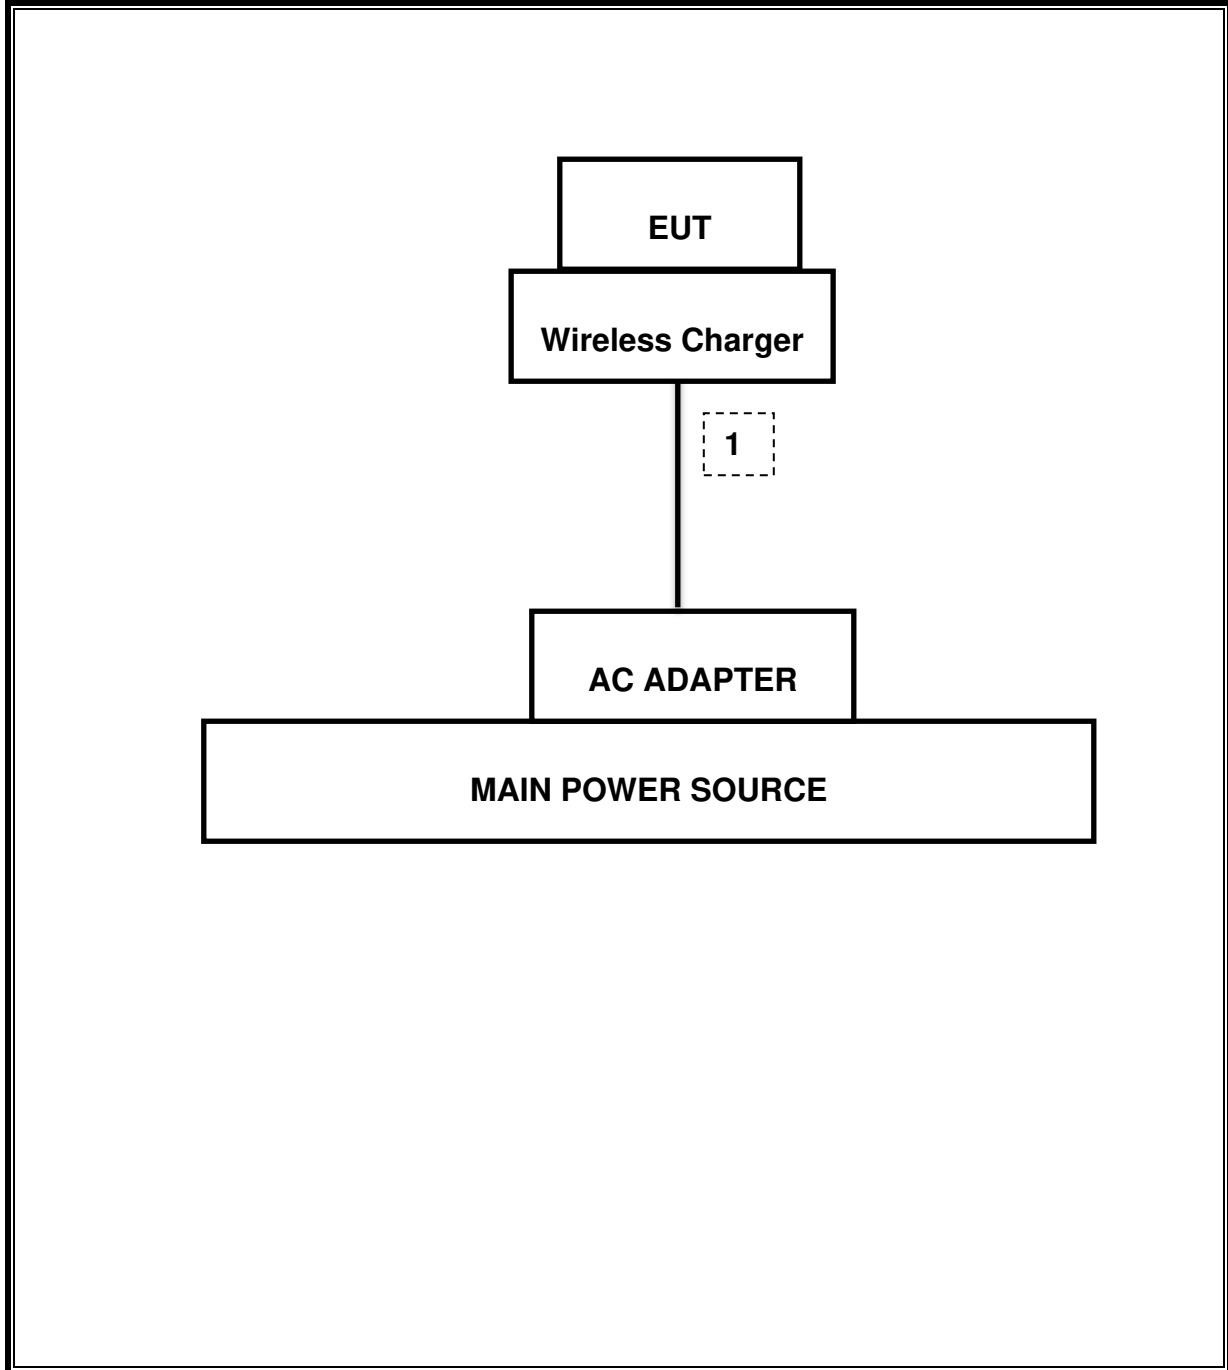

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-17-17
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-16-17
Preamplifier	ETS	3115-PA	00167475	08-17-17
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-16-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-17-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-16-17
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-17
Average Power Sensor	R&S	NRZ-Z91	102681	08-16-17
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-16-17
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-16-17
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-17-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-16-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-17-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-16-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-17-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-16-17
LISN	R&S	ENV-216	101836	08-16-17
LISN	R&S	ENV-216	101837	08-16-17
Attenuator	PASTERNAK	PE7087-10	A009	08-16-17
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	11-25-17

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r05: Measurement Procedure §9.2.3.1 AVGPM is used for average power and §10.3 AVGPSD-1, §10.5 AVGPSD-2 are used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS


None; for reporting purposes only.

8.1. ON TIME AND DUTY CYCLE RESULTS


Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
802.11b	8.604	8.707	0.988	98.8%	0.00	0.010
802.11g	1.426	1.535	0.929	92.9%	0.32	0.701
802.11n HT20	1.336	1.444	0.925	92.5%	0.34	0.749

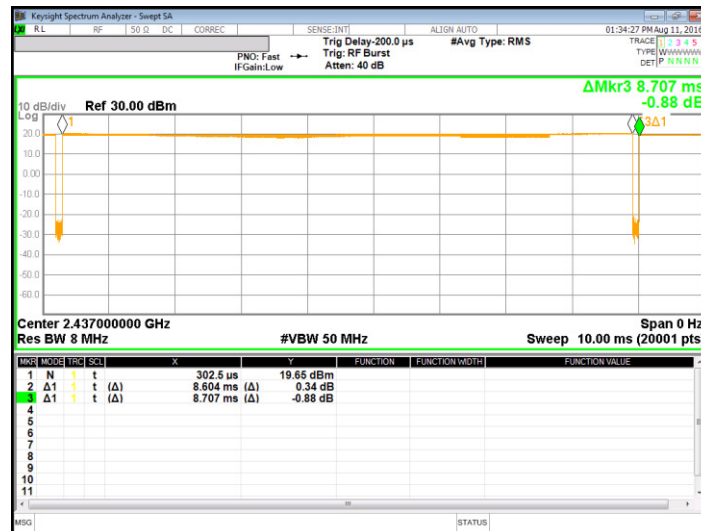

[802.11b]

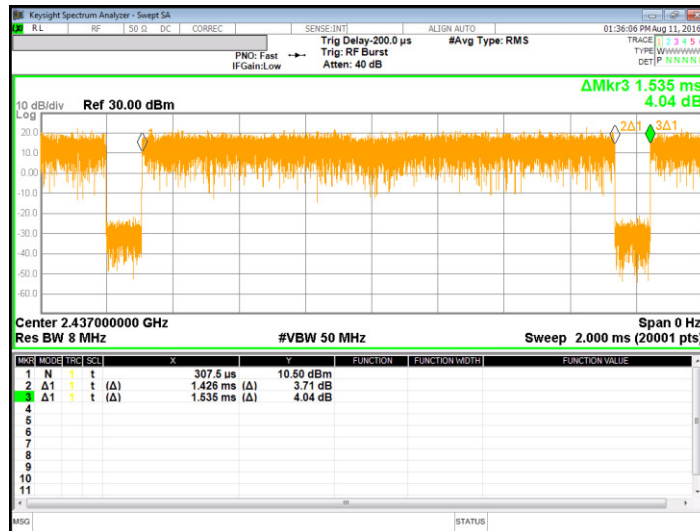

[802.11g]

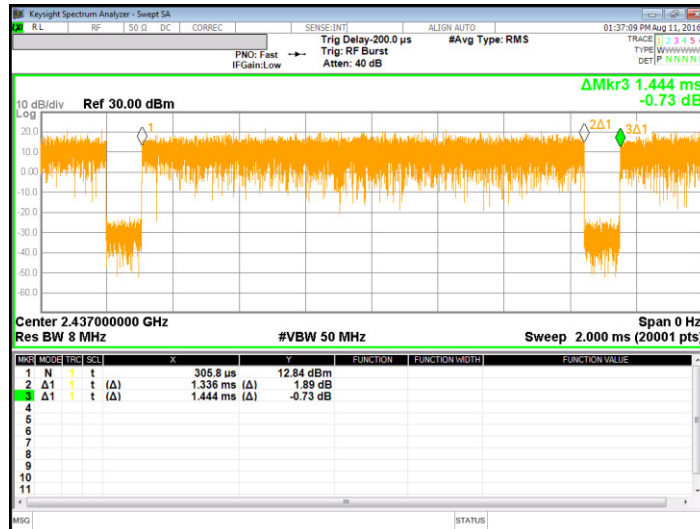

[802.11n]

**Note: Duty cycle test data is from test result of original filing.
 (FCC ID: A3LSMR765U, TEST REPORT: 16K23793-E1V2)**

9. SUMMARY TABLE

C2PC Reason

: The changes of this C2PC model are two matching component of Bluetooth/Wi-Fi antenna.
 So we tested only conducted output power, Bluetooth/Wi-Fi radiated and AC conducted emission items.

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	See original
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-30dBc		Pass	See original
15.247	TX conducted output power	<30dBm		Pass	16.65dBm (Av)
15.247	PSD	<8dBm		Pass	See original
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	45.29 dBuV (Pk)
15.205, 15.209	Radiated Spurious Emission	< 74dBuV/m	Radiated	Pass	66.86 dBuV/m (Pk)

10. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Duty cycle correction factor is already added to the average output power results for duty cycle factor < 98%. (802.11g, 802.11n mode)

RESULTS

10.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-4.50	30.00	30.00	36.00	30.00
Mid	2437	-4.50	30.00	30.00	36.00	30.00
High	2462	-4.50	30.00	30.00	36.00	30.00

Results

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	16.38	16.38	36.00	-19.62
Mid	2437	16.65	16.65	36.00	-19.35
High	2462	15.93	15.93	36.00	-20.07
Worst			16.65	36.00	-19.35

10.1.2. 802.11g MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-4.50	30.00	30.00	36.00	30.00
Mid	2437	-4.50	30.00	30.00	36.00	30.00
High	2462	-4.50	30.00	30.00	36.00	30.00

Results

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	14.50	14.50	36.00	-21.50
Mid	2437	14.53	14.53	36.00	-21.47
High	2462	14.25	14.25	36.00	-21.75
Worst			14.53	36.00	-21.47

10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-4.50	30.00	30.00	36.00	30.00
Mid	2437	-4.50	30.00	30.00	36.00	30.00
High	2462	-4.50	30.00	30.00	36.00	30.00

Results

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	13.96	13.96	36.00	-22.04
Mid	2437	14.04	14.04	36.00	-21.96
High	2462	13.83	13.83	36.00	-22.17
Worst			14.04	36.00	-21.96

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions)
Duty cycle factor= $10\log(1/x)$ For this sample B mode = 0dB (duty cycle >98%); G mode = 0.32dB; N mode = 0.34dB.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Formula for converting the filed strength from uV/m to dBuV/m is:
Limit (dBuV/m) = $20 \log \text{limit (uV/m)}$

11.2. TRANSMITTER ABOVE 1 GHz

11.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

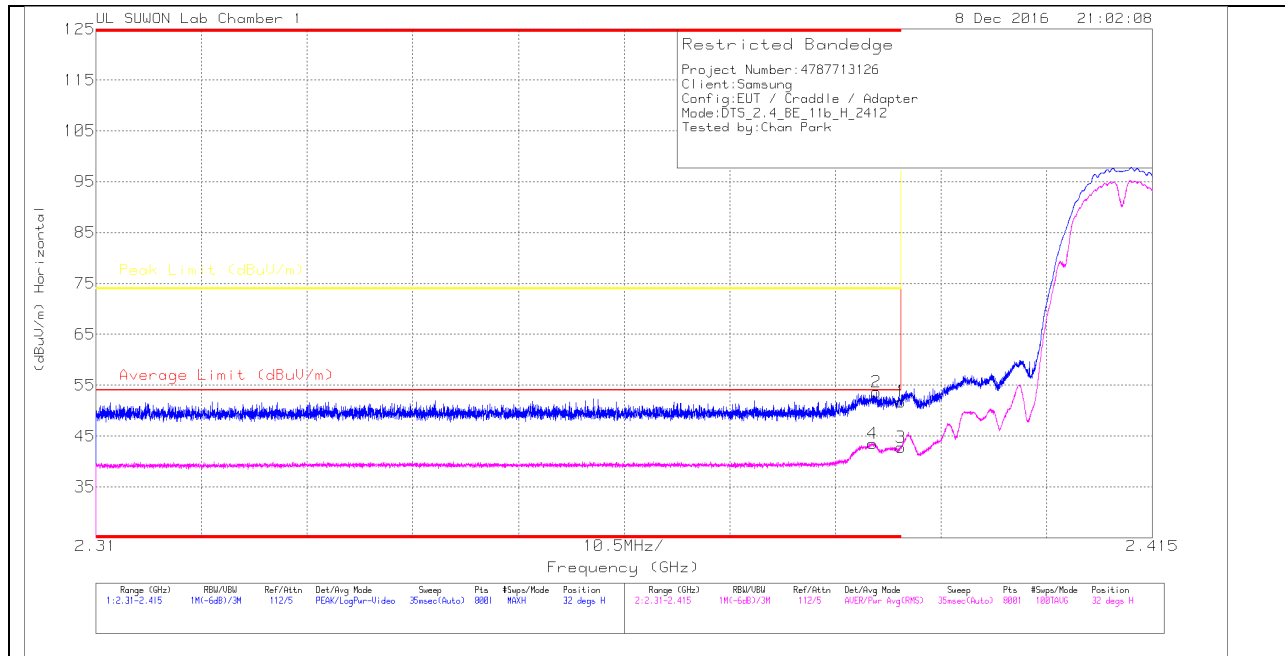

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/00168 717_15061 9	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.35	Pk	31.8	-28.4	0	51.75	-	-	74	-22.25	32	106	H
2	* 2.388	50.3	Pk	31.8	-28.4	0	53.7	-	-	74	-20.3	32	106	H
3	* 2.39	39.34	RMS	31.8	-28.4	0	42.74	54	-11.26	-	-	32	106	H
4	* 2.387	40.28	RMS	31.8	-28.5	0	43.58	54	-10.42	-	-	32	106	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

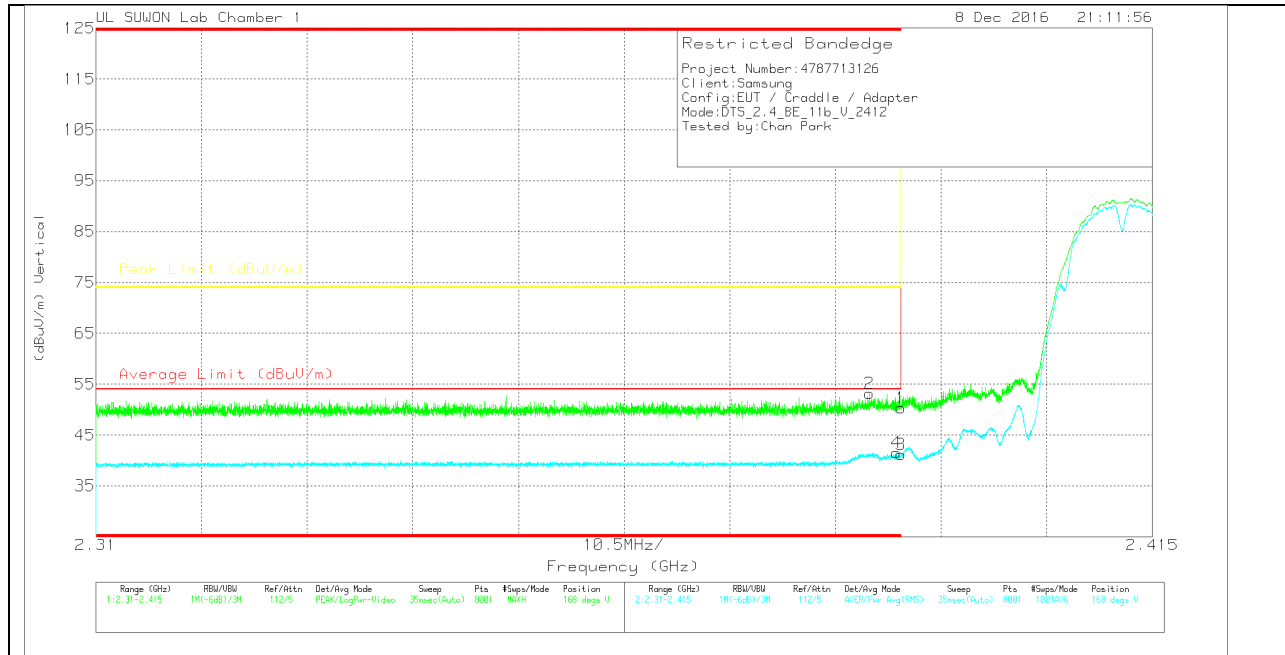

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.95	Pk	31.8	-28.4	0	50.35	-	-	74	-23.65	168	102	V
2	* 2.387	49.88	Pk	31.8	-28.5	0	53.18	-	-	74	-20.82	168	102	V
3	* 2.39	37.72	RMS	31.8	-28.4	0	41.12	54	-12.88	-	-	168	102	V
4	* 2.39	38.14	RMS	31.8	-28.4	0	41.54	54	-12.46	-	-	168	102	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

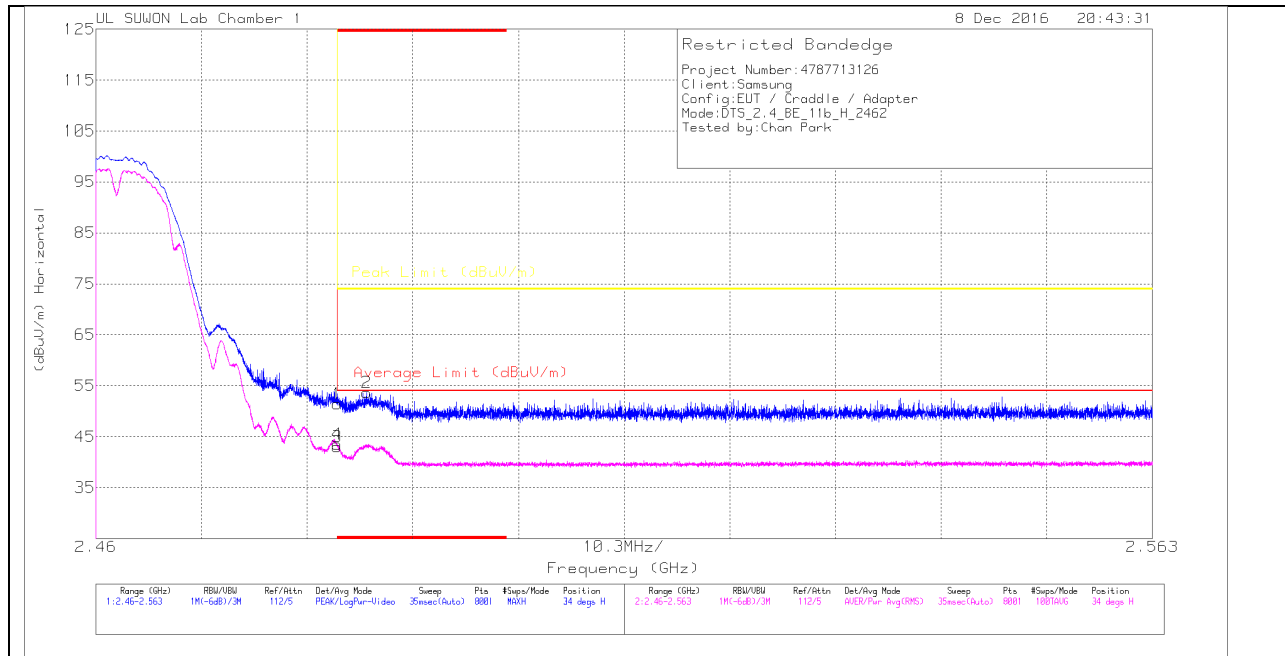

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.76	Pk	32	-28.3	0	51.46	-	-	74	-22.54	34	138	H
2	* 2.486	49.97	Pk	32	-28.3	0	53.67	-	-	74	-20.33	34	138	H
3	* 2.484	39.34	RMS	32	-28.3	0	43.04	54	-10.96	-	-	34	138	H
4	* 2.484	39.82	RMS	32	-28.3	0	43.52	54	-10.48	-	-	34	138	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

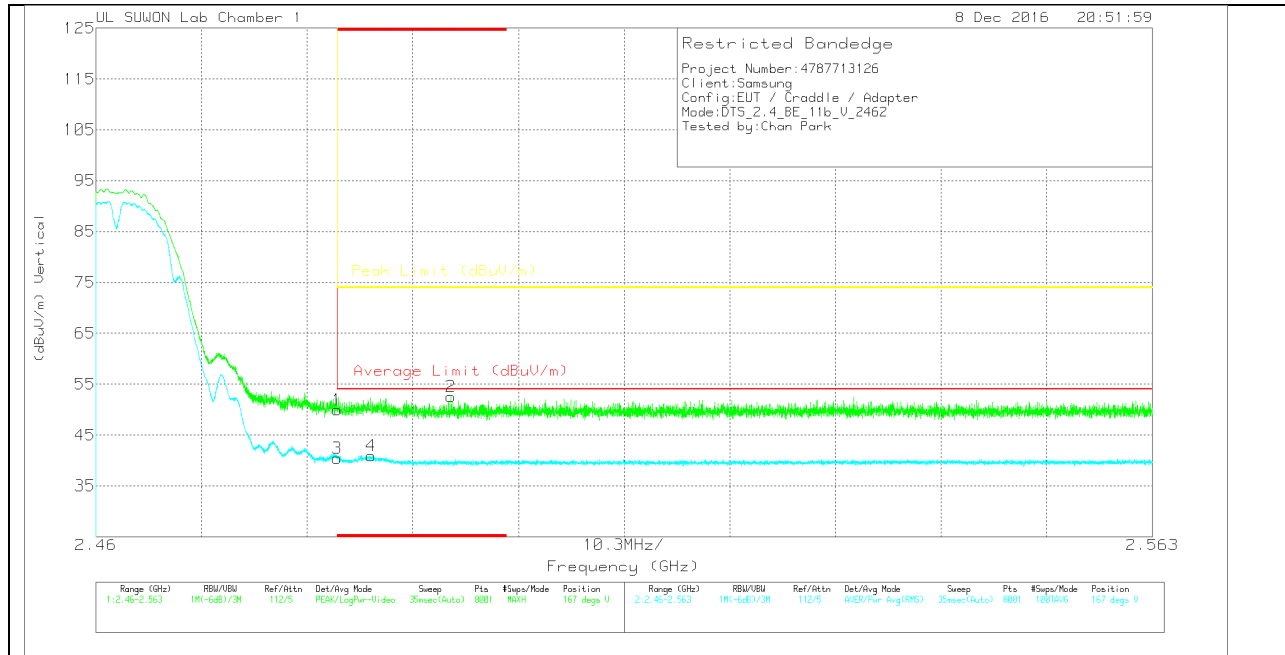

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.29	Pk	32	-28.3	0	49.99	-	-	74	-24.01	167	100	V
2	* 2.495	48.89	Pk	32	-28.3	0	52.59	-	-	74	-21.41	167	100	V
3	* 2.484	36.78	RMS	32	-28.3	0	40.48	54	-13.52	-	-	167	100	V
4	* 2.487	37.23	RMS	32	-28.3	0	40.93	54	-13.07	-	-	167	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

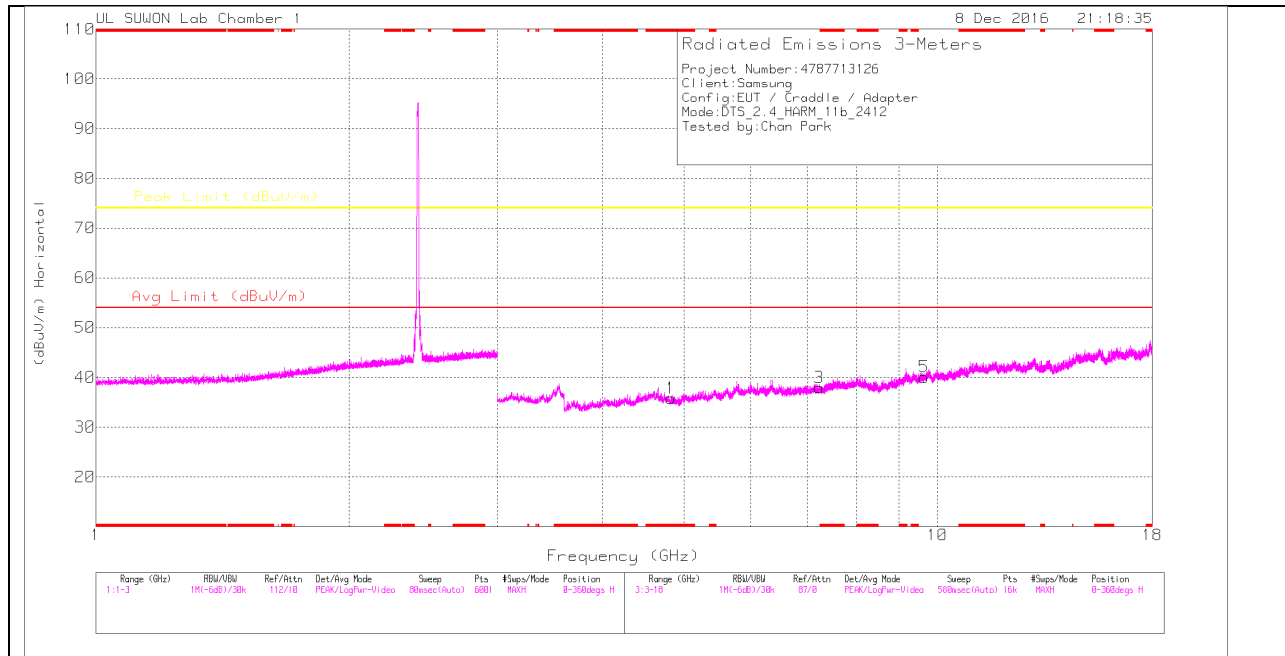

LOW CHANNEL VERTICAL

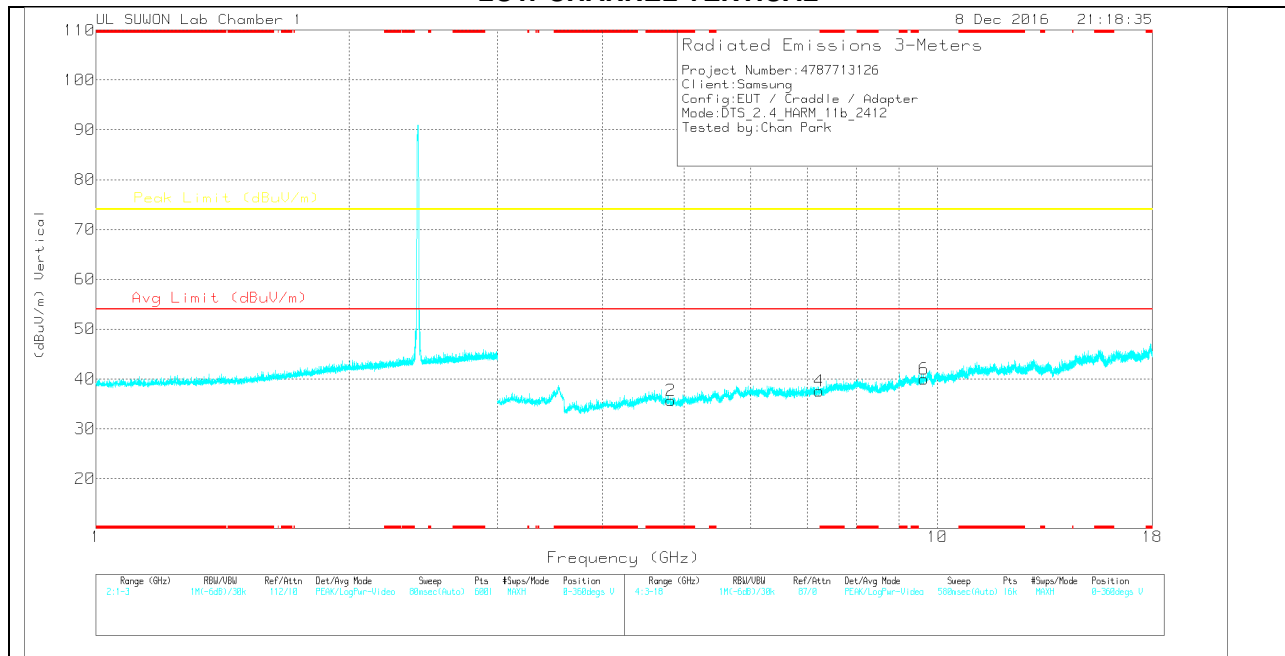

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.822	35.33	PK	34	-33.5	0	35.83	-	-	74	-38.17	0-360	150	H
3	7.235	33.07	PK	35.7	-30.8	0	37.97	-	-	74	-36.03	0-360	250	H
5	9.648	30.35	PK	37.1	-27.4	0	40.05	-	-	74	-33.95	0-360	250	H
2	* 4.823	35.16	PK	34	-33.5	0	35.66	-	-	74	-38.34	0-360	150	V
4	7.235	32.72	PK	35.7	-30.8	0	37.62	-	-	74	-36.38	0-360	150	V
6	9.648	30.34	PK	37.1	-27.4	0	40.04	-	-	74	-33.96	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

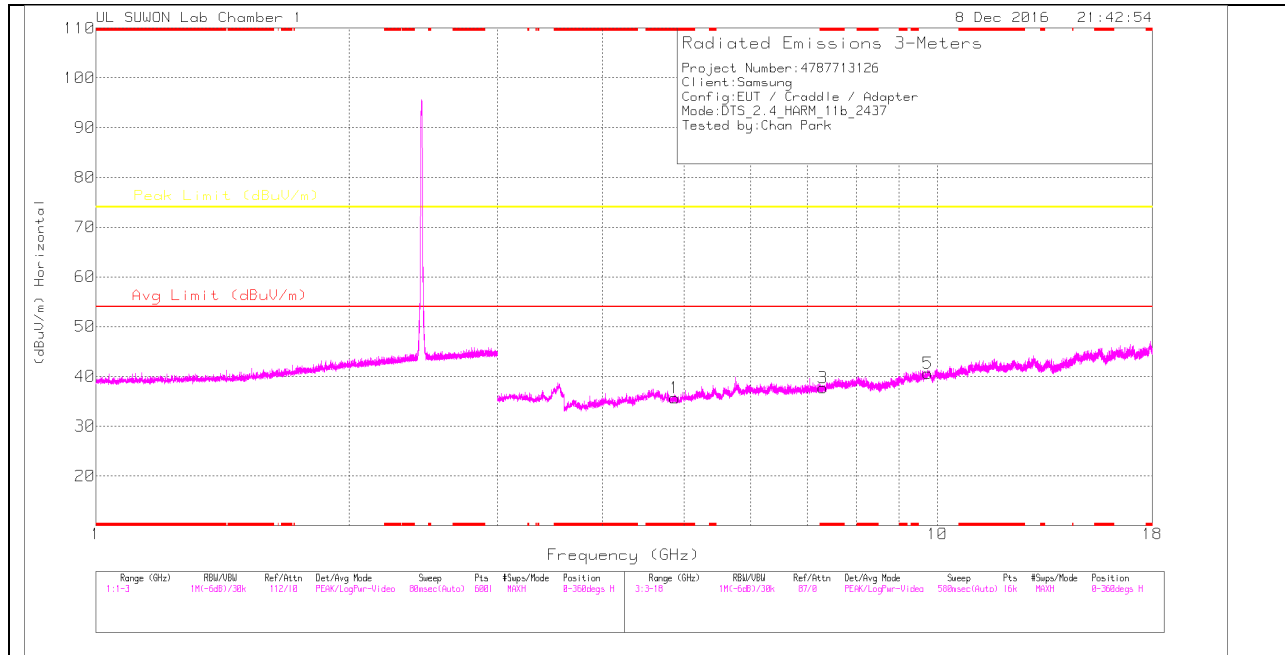

MID CHANNEL VERTICAL

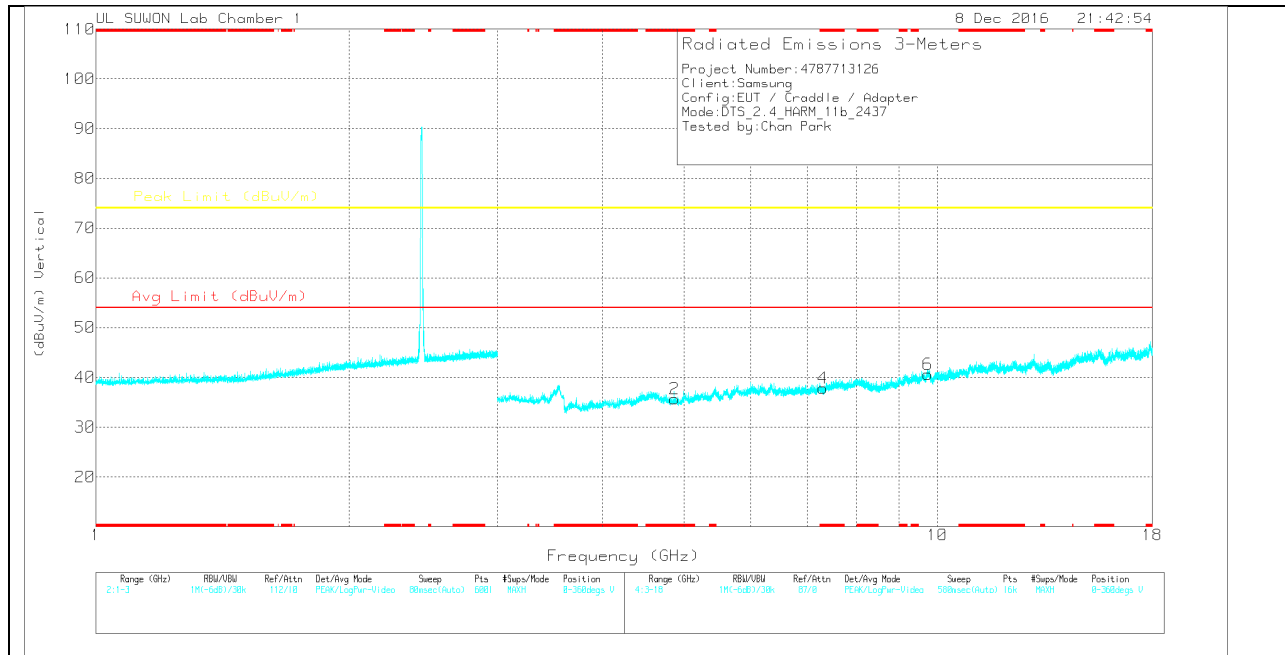

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.875	35.25	PK	34	-33.6	0	35.65	-	-	74	-38.35	0-360	150	H
3	* 7.311	32.49	PK	35.7	-30.5	0	37.69	-	-	74	-36.31	0-360	150	H
5	9.748	30.2	PK	37.2	-26.8	0	40.6	-	-	74	-33.4	0-360	250	H
2	* 4.872	35.34	PK	34	-33.6	0	35.74	-	-	74	-38.26	0-360	150	V
4	* 7.31	32.68	PK	35.7	-30.5	0	37.88	-	-	74	-36.12	0-360	150	V
6	9.748	30.21	PK	37.2	-26.8	0	40.61	-	-	74	-33.39	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

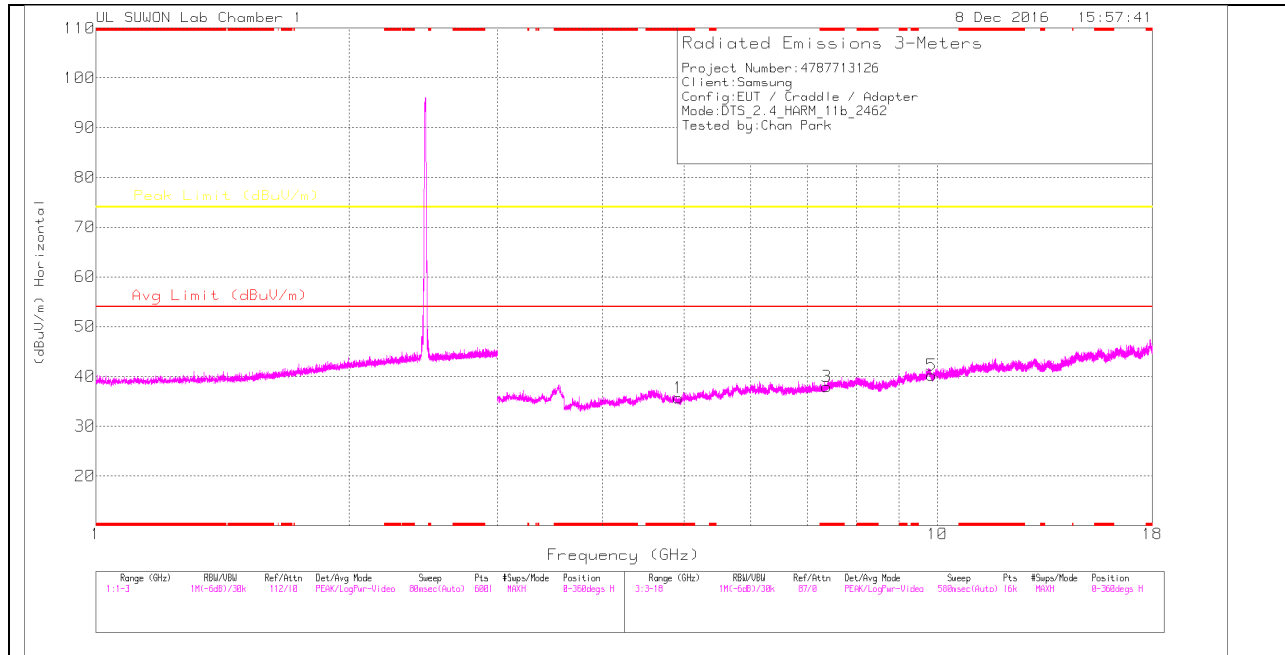

HIGH CHANNEL VERTICAL

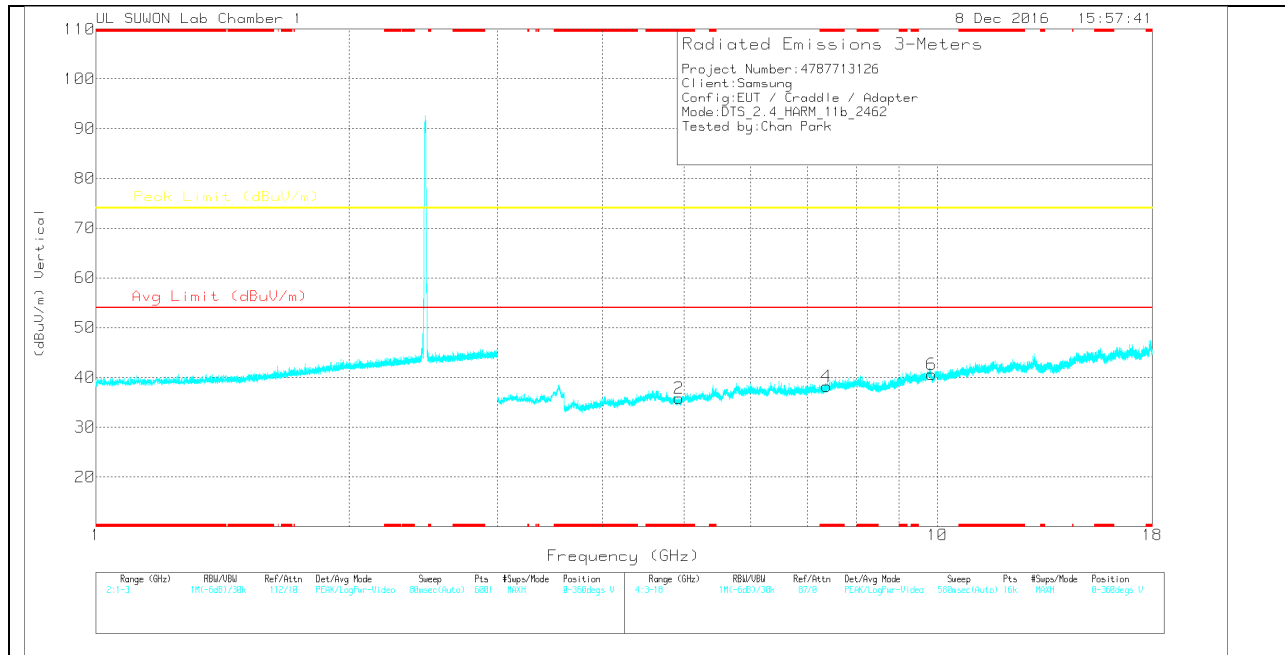

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.924	35.14	PK	34	-33.4	0	35.74	-	-	74	-38.26	0-360	150	H
3	* 7.389	32.62	PK	35.8	-30.5	0	37.92	-	-	74	-36.08	0-360	150	H
5	9.849	30.49	PK	37.3	-27.5	0	40.29	-	-	74	-33.71	0-360	150	H
2	* 4.926	35.16	PK	34	-33.4	0	35.76	-	-	74	-38.24	0-360	150	V
4	* 7.389	32.95	PK	35.8	-30.5	0	38.25	-	-	74	-35.75	0-360	150	V
6	9.849	30.84	PK	37.3	-27.5	0	40.64	-	-	74	-33.36	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

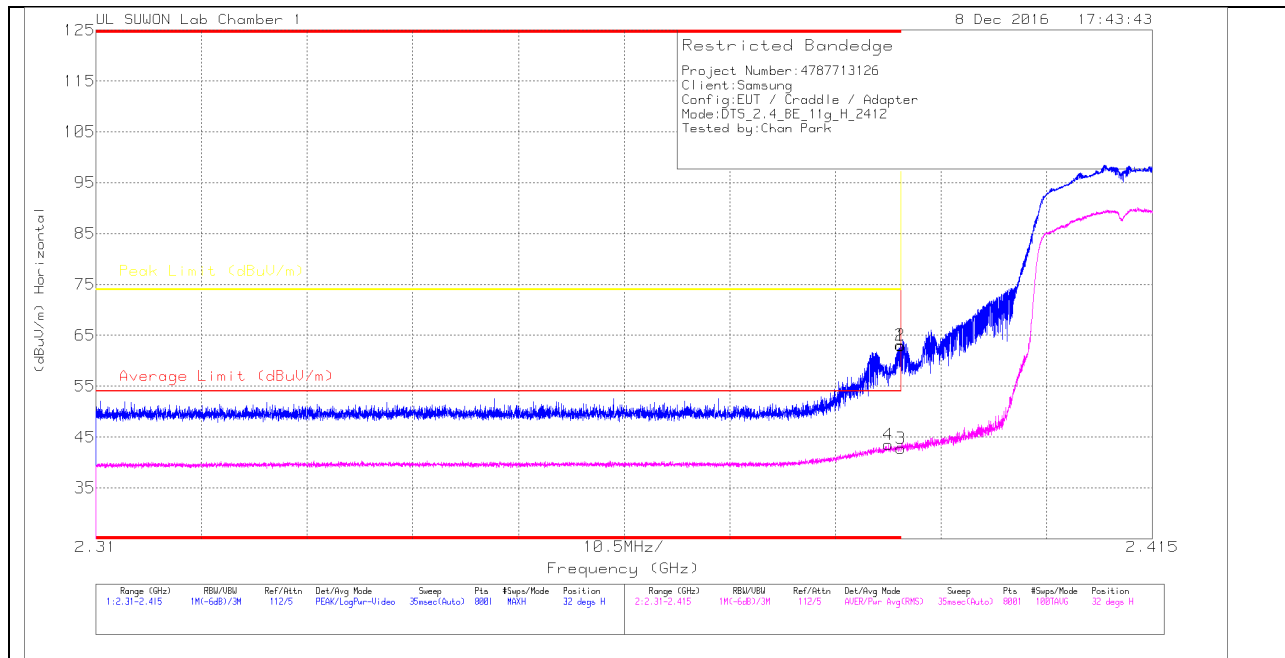

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	59.54	Pk		-28.4	0	62.94	-	-	74	-11.06	32	106	H
2	* 2.39	59.7	Pk		-28.4	0	63.1	-	-	74	-10.9	32	106	H
3	* 2.39	39.05	RMS		-28.4	.32	42.77	54	-11.23	-	-	32	106	H
4	* 2.389	39.77	RMS		-28.4	.32	43.49	54	-10.51	-	-	32	106	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

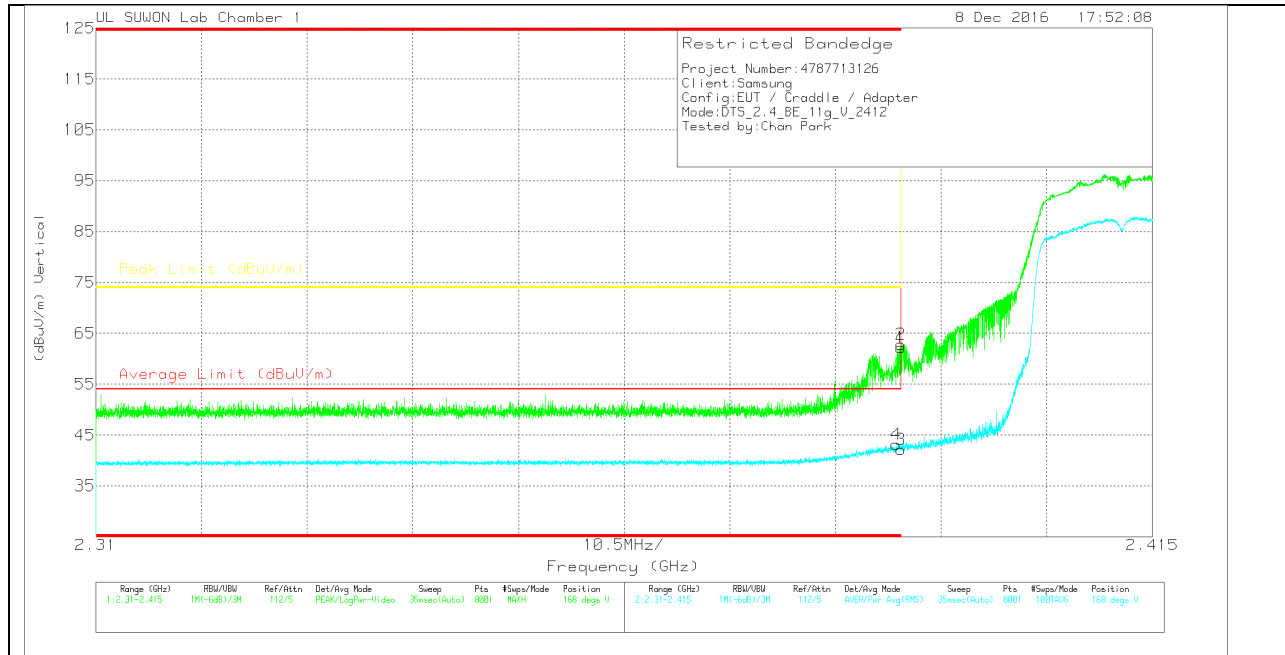

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	58.76	Pk		-28.4	0	62.16	-	-	74	-11.84	168	102	V
2	* 2.39	59.47	Pk		-28.4	0	62.87	-	-	74	-11.13	168	102	V
3	* 2.39	38.45	RMS		-28.4	.32	42.17	54	-11.83	-	-	168	102	V
4	* 2.39	39.42	RMS		-28.4	.32	43.14	54	-10.86	-	-	168	102	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

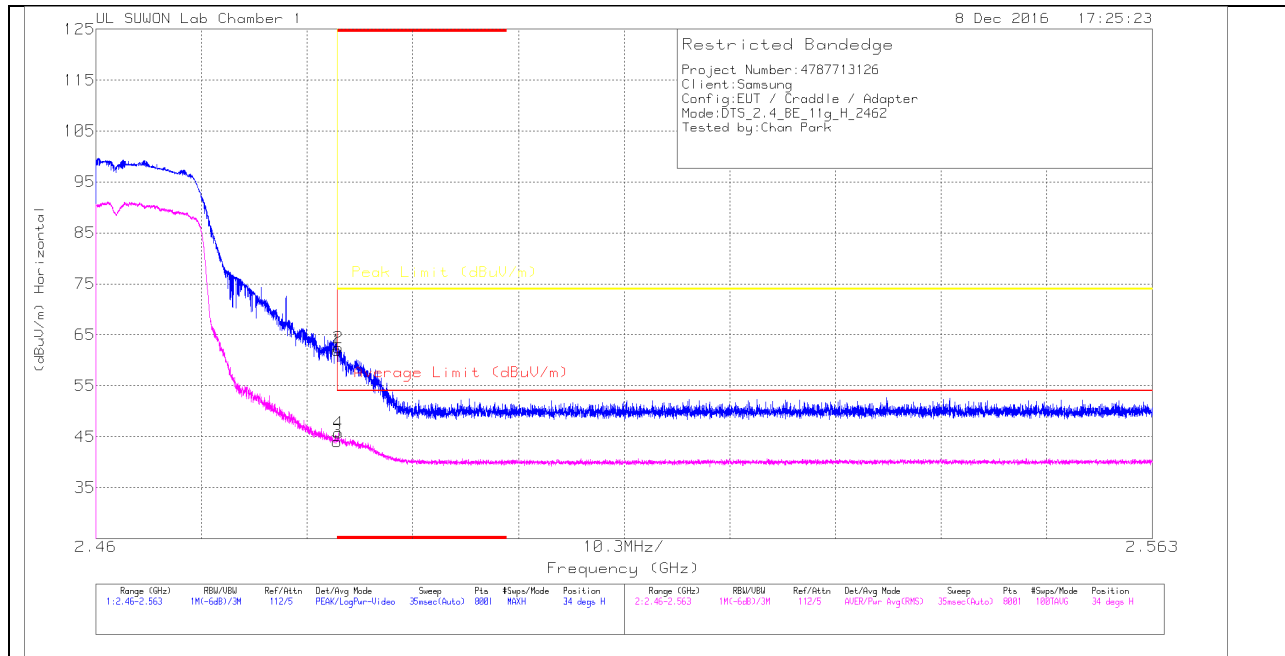

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	58.2	Pk	32	-28.3	0	61.9	-	-	74	-12.1	34	296	H
2	* 2.484	58.76	Pk	32	-28.3	0	62.46	-	-	74	-11.54	34	296	H
3	* 2.484	40.06	RMS	32	-28.3	.32	44.08	54	-9.92	-	-	34	296	H
4	* 2.484	41.69	RMS	32	-28.3	.32	45.71	54	-8.29	-	-	34	296	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

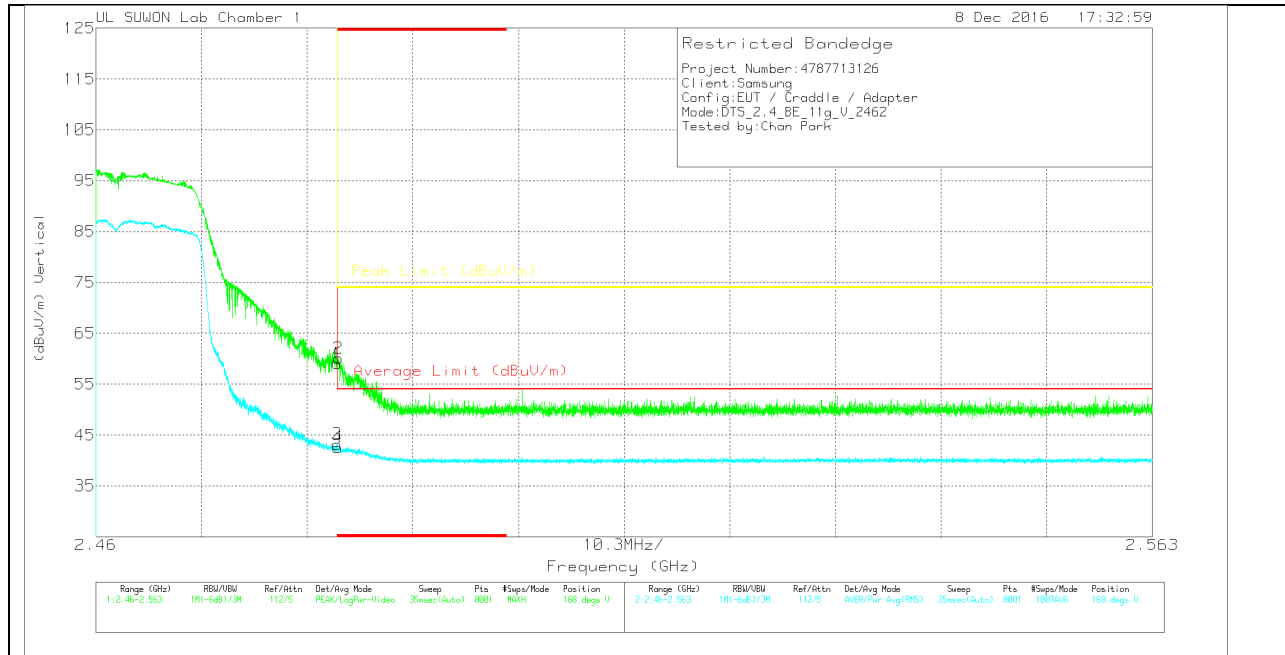

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.41	Pk	32	-28.3	0	59.11	-	-	74	-14.89	168	100	V
2	* 2.484	56.4	Pk	32	-28.3	0	60.1	-	-	74	-13.9	168	100	V
3	* 2.484	39.19	RMS	32	-28.3	.32	43.21	54	-10.79	-	-	168	100	V
4	* 2.484	38.57	RMS	32	-28.3	.32	42.59	54	-11.41	-	-	168	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

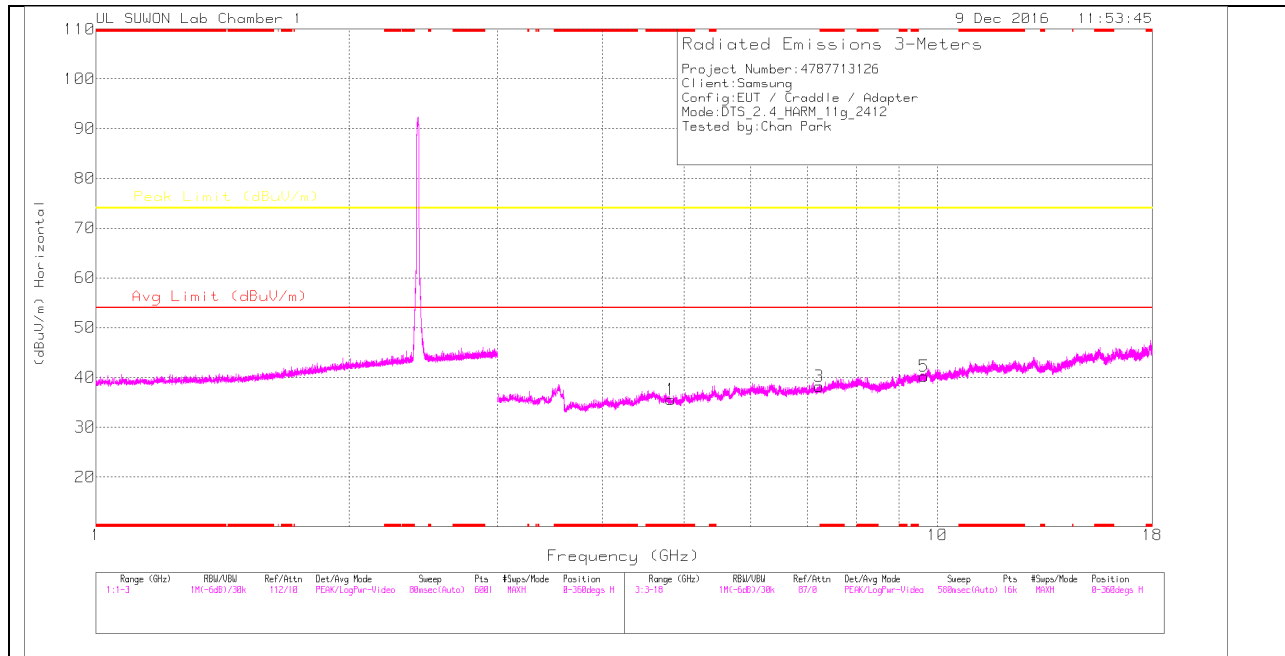

LOW CHANNEL VERTICAL

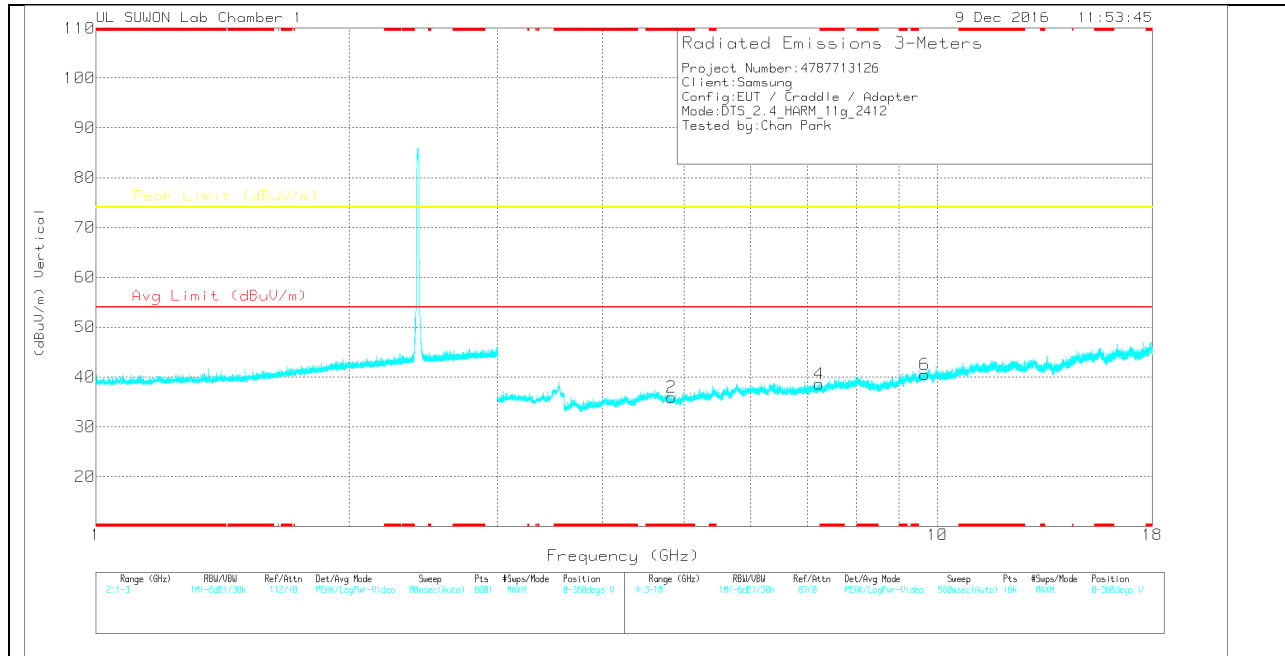

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.825	35.1	PK	34	-33.5	0	35.6	-	-	74	-38.4	0-360	250	H
3	7.238	33.16	PK	35.7	-30.7	0	38.16	-	-	74	-35.84	0-360	250	H
5	9.647	30.59	PK	37.1	-27.4	0	40.29	-	-	74	-33.71	0-360	250	H
2	* 4.827	35.44	PK	34	-33.5	0	35.94	-	-	74	-38.06	0-360	250	V
4	7.236	33.6	PK	35.7	-30.7	0	38.6	-	-	74	-35.4	0-360	250	V
6	9.652	30.8	PK	37.1	-27.4	0	40.5	-	-	74	-33.5	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

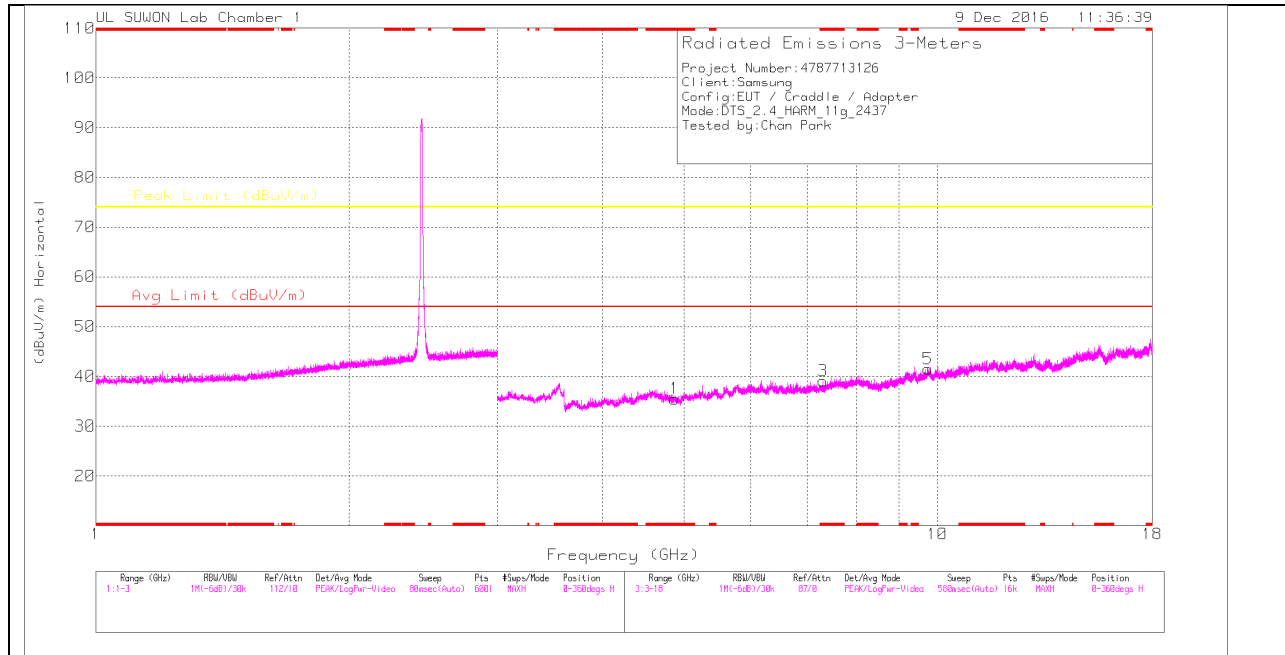

MID CHANNEL VERTICAL

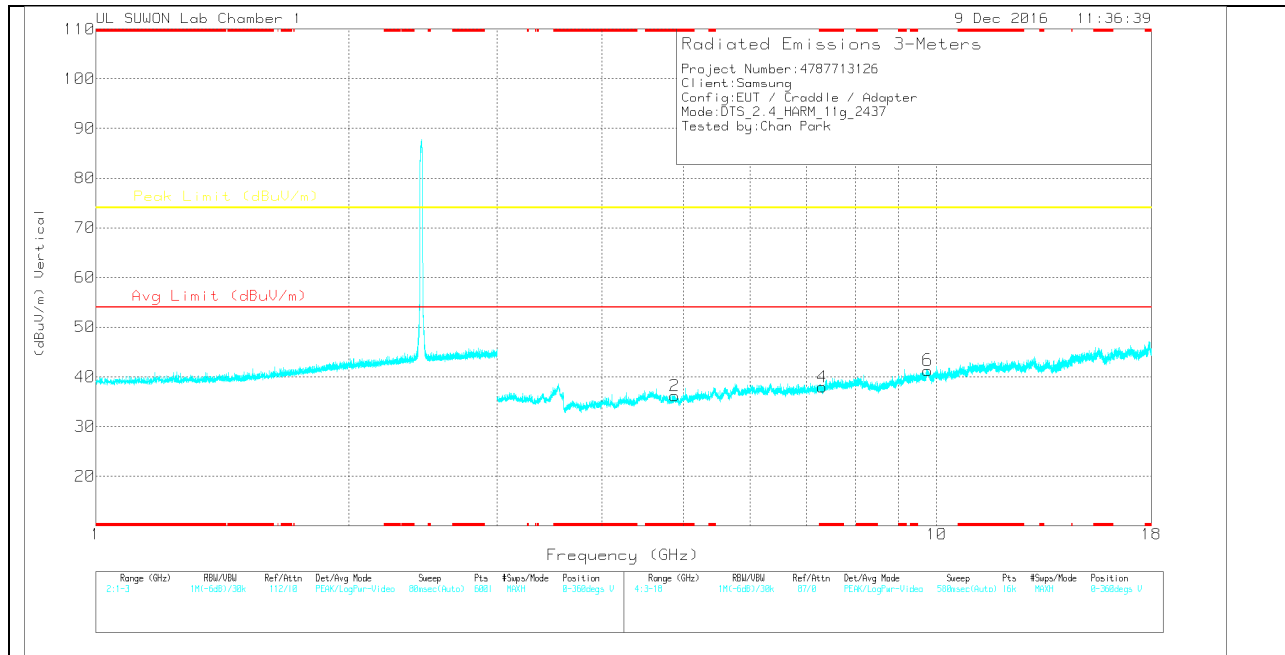

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.875	35.1	PK	34	-33.6	0	35.5	-	-	74	-38.5	0-360	150	H
3	* 7.314	33.78	PK	35.8	-30.5	0	39.08	-	-	74	-34.92	0-360	150	H
5	9.747	31.12	PK	37.2	-26.8	0	41.52	-	-	74	-32.48	0-360	150	H
2	* 4.878	35.71	PK	34	-33.5	0	36.21	-	-	74	-37.79	0-360	150	V
4	* 7.309	32.76	PK	35.7	-30.5	0	37.96	-	-	74	-36.04	0-360	150	V
6	9.751	30.91	PK	37.2	-26.8	0	41.31	-	-	74	-32.69	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

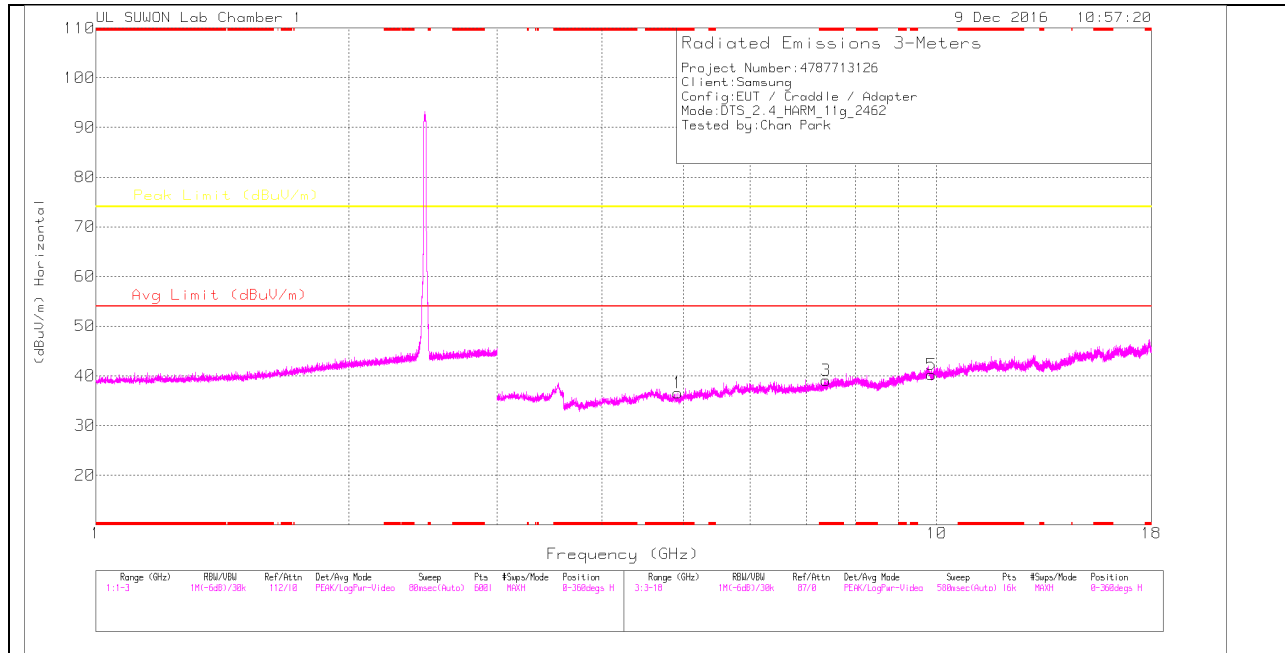

HIGH CHANNEL VERTICAL

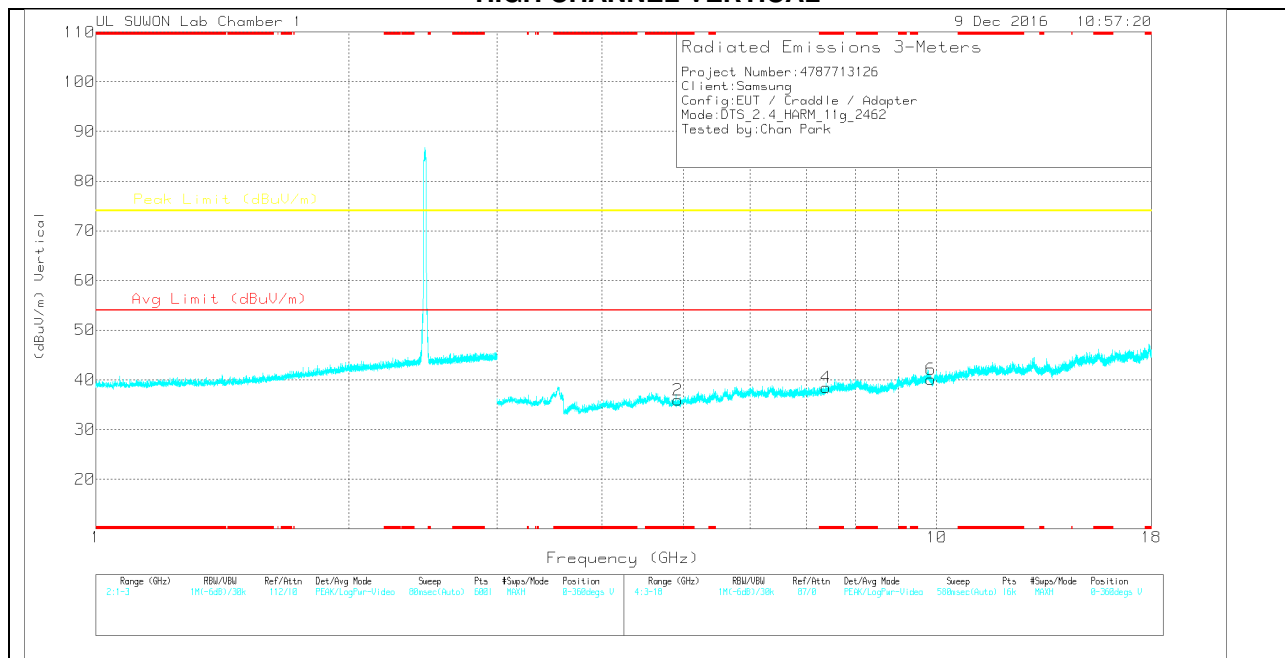

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.922	35.99	PK	34	-33.4	0	36.59	-	-	74	-37.41	0-360	250	H
3	* 7.388	33.83	PK	35.8	-30.5	0	39.13	-	-	74	-34.87	0-360	150	H
5	9.851	30.47	PK	37.3	-27.5	0	40.27	-	-	74	-33.73	0-360	250	H
2	* 4.924	35.38	PK	34	-33.4	0	35.98	-	-	74	-38.02	0-360	250	V
4	* 7.387	33.12	PK	35.8	-30.5	0	38.42	-	-	74	-35.58	0-360	250	V
6	9.848	30.34	PK	37.3	-27.5	0	40.14	-	-	74	-33.86	0-360	150	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

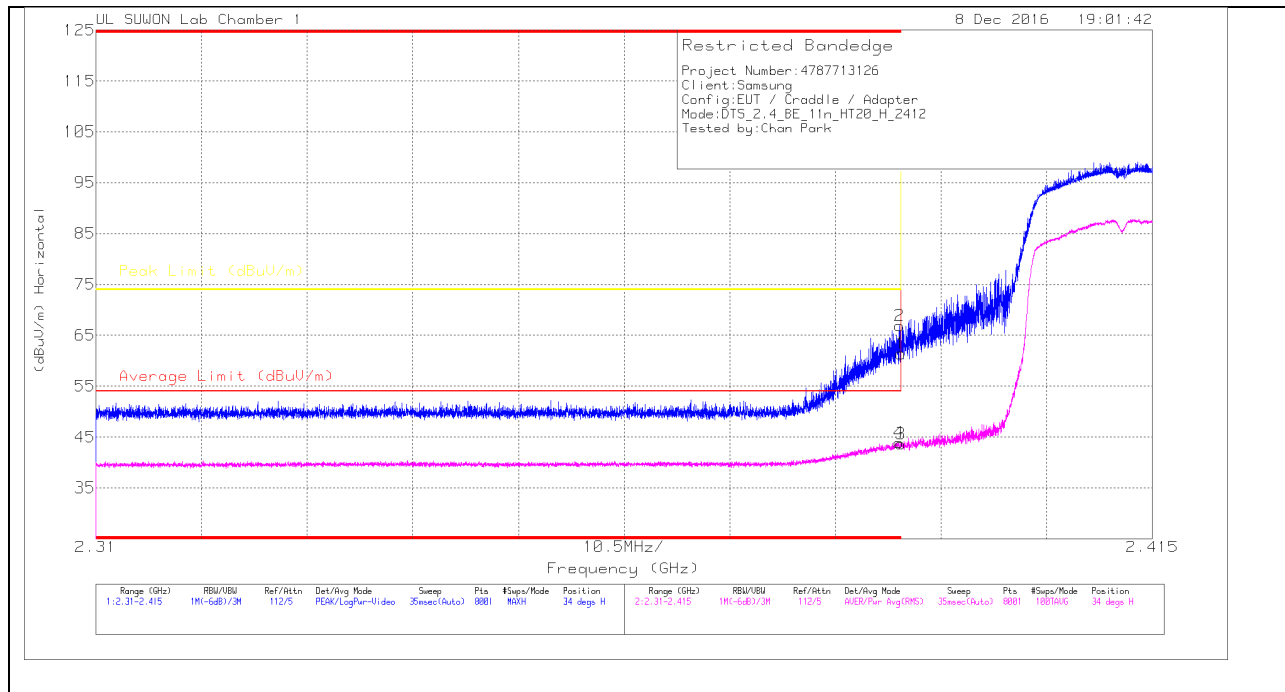

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	58	Pk		-28.4	0	61.4	-	-	74	-12.6	34	164	H
2	* 2.39	63.46	Pk		-28.4	0	66.86	-	-	74	-7.14	34	164	H
3	* 2.39	39.91	RMS		-28.4	.34	43.65	54	-10.35	-	-	34	164	H
4	* 2.39	40.18	RMS		-28.4	.34	43.92	54	-10.08	-	-	34	164	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

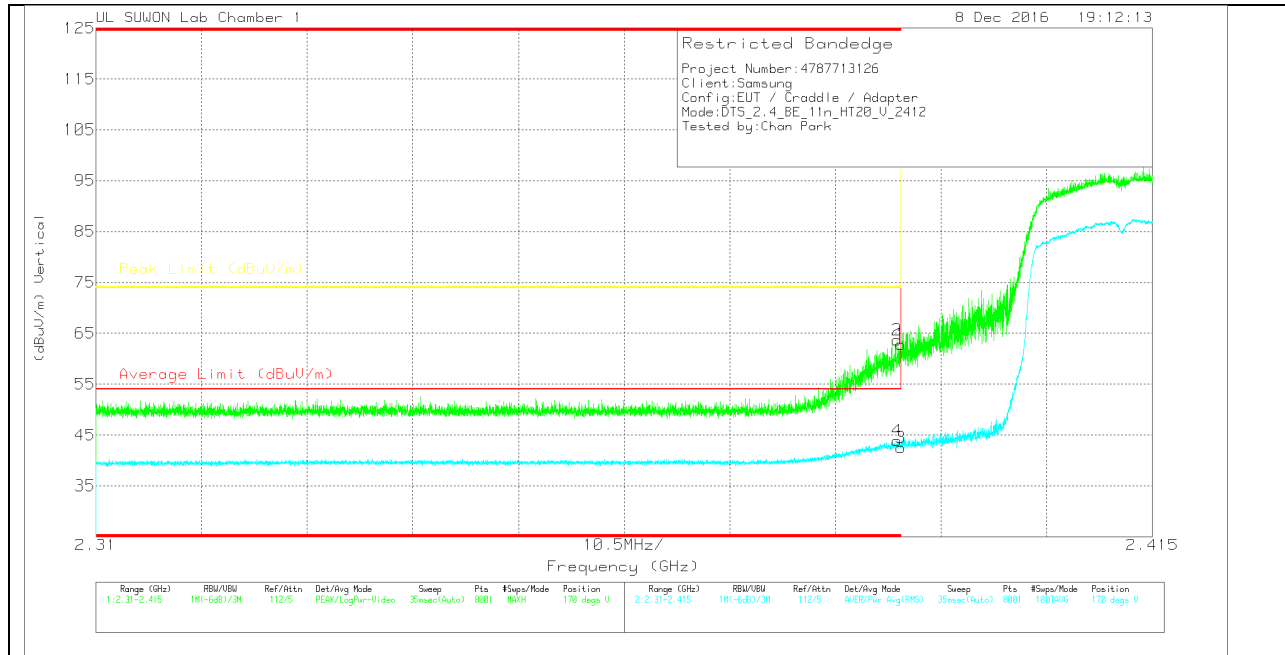

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	59.4	Pk	31.8	-28.4	0	62.8	-	-	74	-11.2	170	101	V
2	* 2.39	60.26	Pk	31.8	-28.4	0	63.66	-	-	74	-10.34	170	101	V
3	* 2.39	38.83	RMS	31.8	-28.4	.34	42.57	54	-11.43	-	-	170	101	V
4	* 2.39	40.16	RMS	31.8	-28.4	.34	43.9	54	-10.1	-	-	170	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

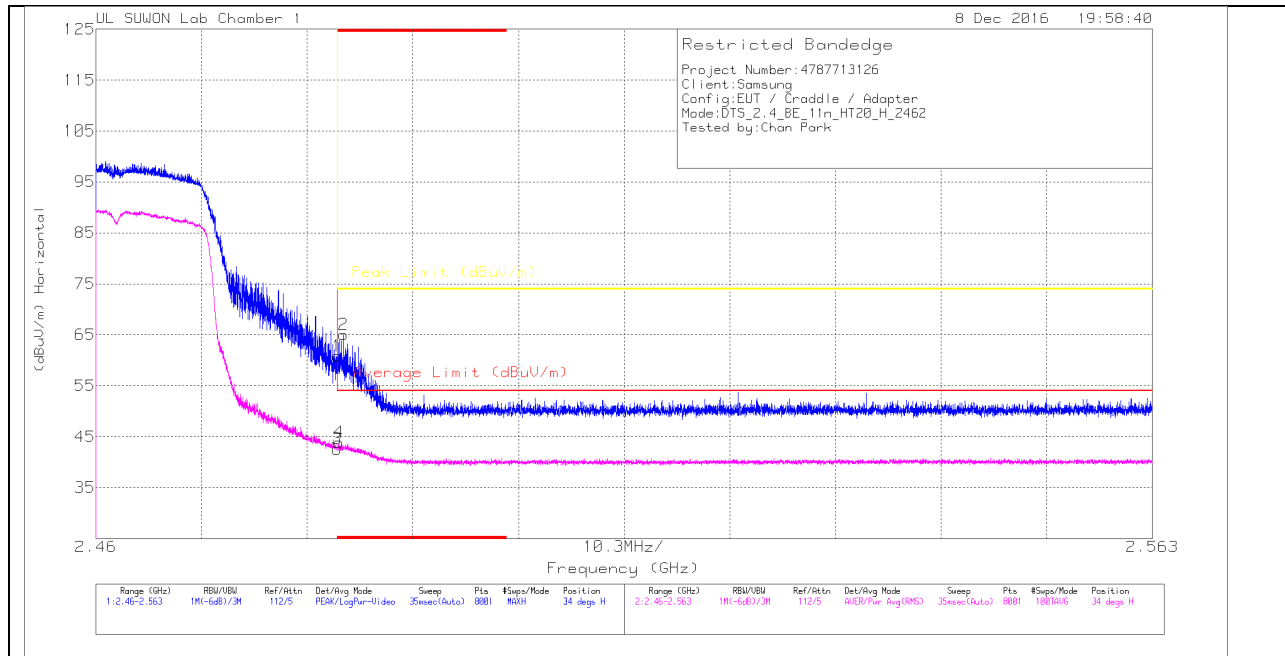

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/00168 717/_15061_9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.13	Pk	32	-28.3	0	60.83	-	-	74	-13.17	34	135	H
2	* 2.484	61.38	Pk	32	-28.3	0	65.08	-	-	74	-8.92	34	135	H
3	* 2.484	38.56	RMS	32	-28.3	.34	42.6	54	-11.4	-	-	34	135	H
4	* 2.484	39.91	RMS	32	-28.3	.34	43.95	54	-10.05	-	-	34	135	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

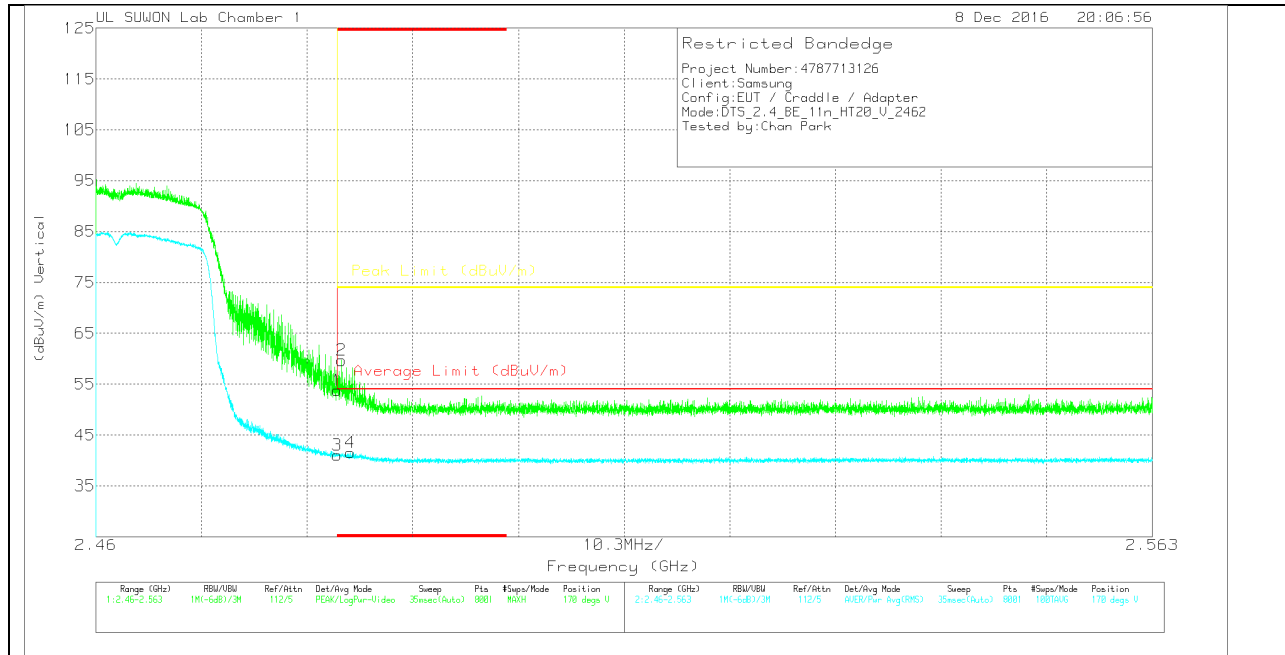

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.06	Pk	32	-28.3	0	53.76	-	-	74	-20.24	170	101	V
2	* 2.484	55.97	Pk	32	-28.3	0	59.67	-	-	74	-14.33	170	101	V
3	* 2.484	36.98	RMS	32	-28.3	.34	41.02	54	-12.98	-	-	170	101	V
4	* 2.485	37.53	RMS	32	-28.3	.34	41.57	54	-12.43	-	-	170	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

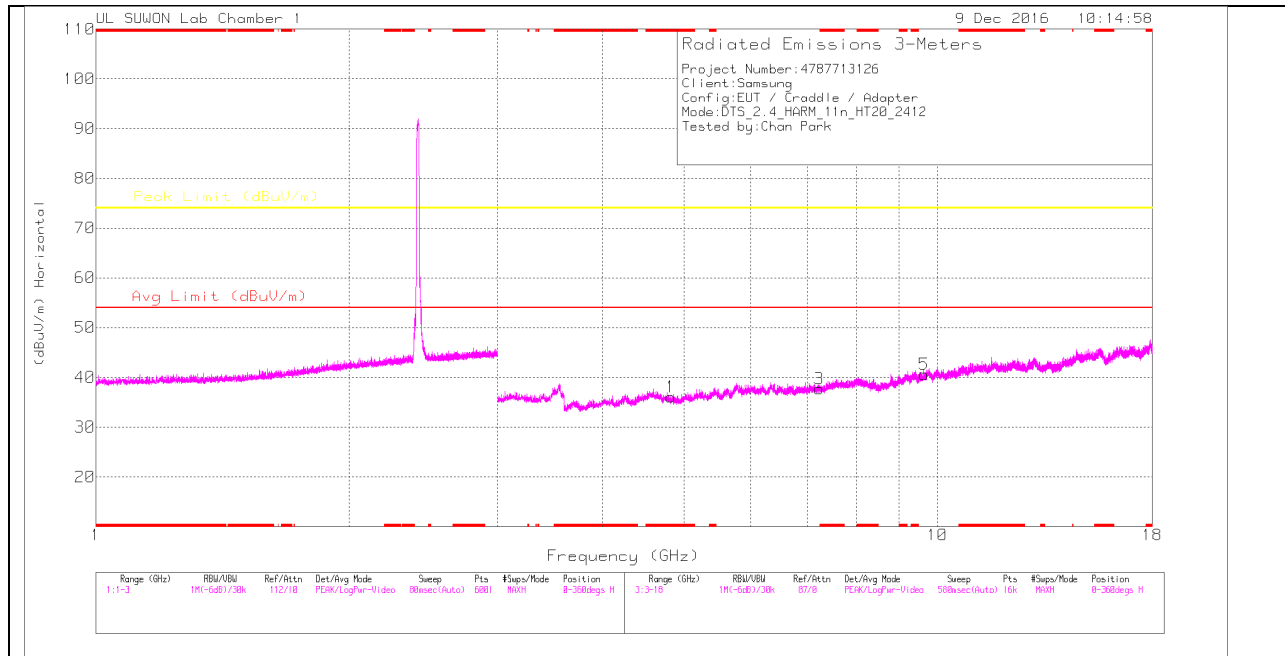

LOW CHANNEL VERTICAL

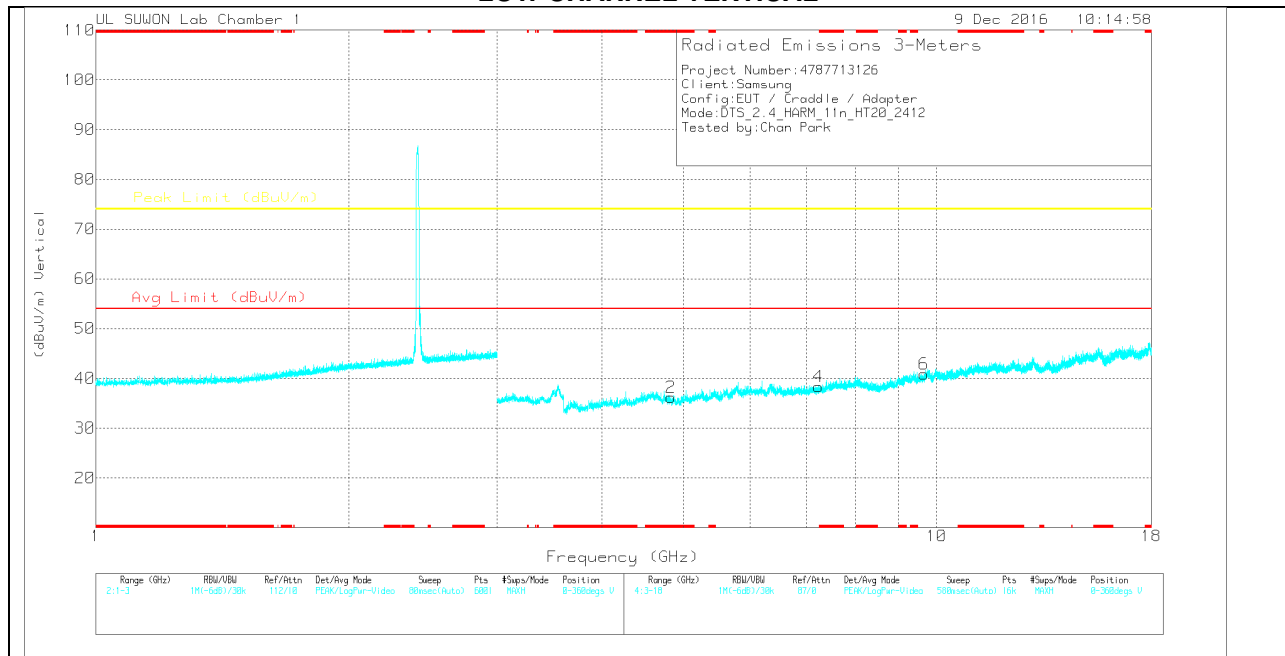

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.822	35.55	PK	34	-33.5	0	36.05	-	-	74	-37.95	0-360	250	H
3	7.236	32.75	PK	35.7	-30.7	0	37.75	-	-	74	-36.25	0-360	250	H
5	9.646	30.9	PK	37.1	-27.4	0	40.6	-	-	74	-33.4	0-360	250	H
2	* 4.827	35.65	PK	34	-33.5	0	36.15	-	-	74	-37.85	0-360	250	V
4	7.237	33.39	PK	35.7	-30.7	0	38.39	-	-	74	-35.61	0-360	250	V
6	9.65	31.16	PK	37.1	-27.4	0	40.86	-	-	74	-33.14	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

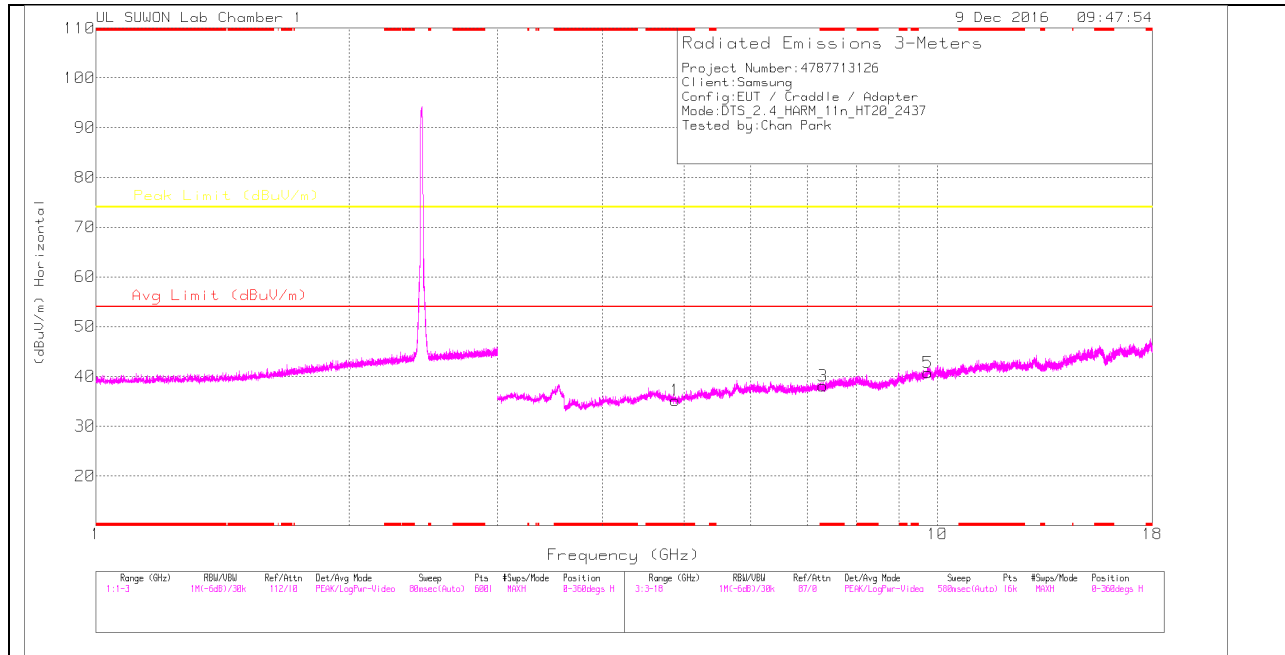

MID CHANNEL VERTICAL

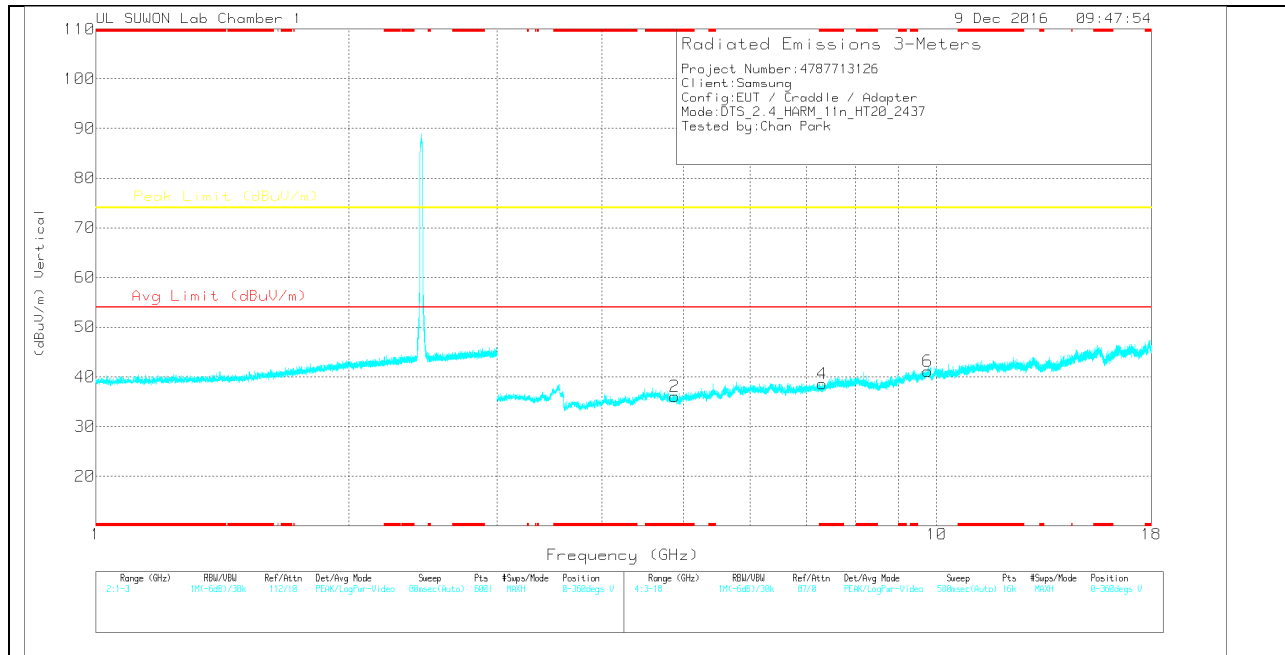

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.876	34.83	PK	34	-33.6	0	35.23	-	-	74	-38.77	0-360	150	H
3	* 7.311	32.9	PK	35.7	-30.5	0	38.1	-	-	74	-35.9	0-360	150	H
5	9.748	30.35	PK	37.2	-26.8	0	40.75	-	-	74	-33.25	0-360	150	H
2	* 4.876	35.69	PK	34	-33.6	0	36.09	-	-	74	-37.91	0-360	150	V
4	* 7.315	33.39	PK	35.8	-30.6	0	38.59	-	-	74	-35.41	0-360	250	V
6	9.75	30.76	PK	37.2	-26.8	0	41.16	-	-	74	-32.84	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

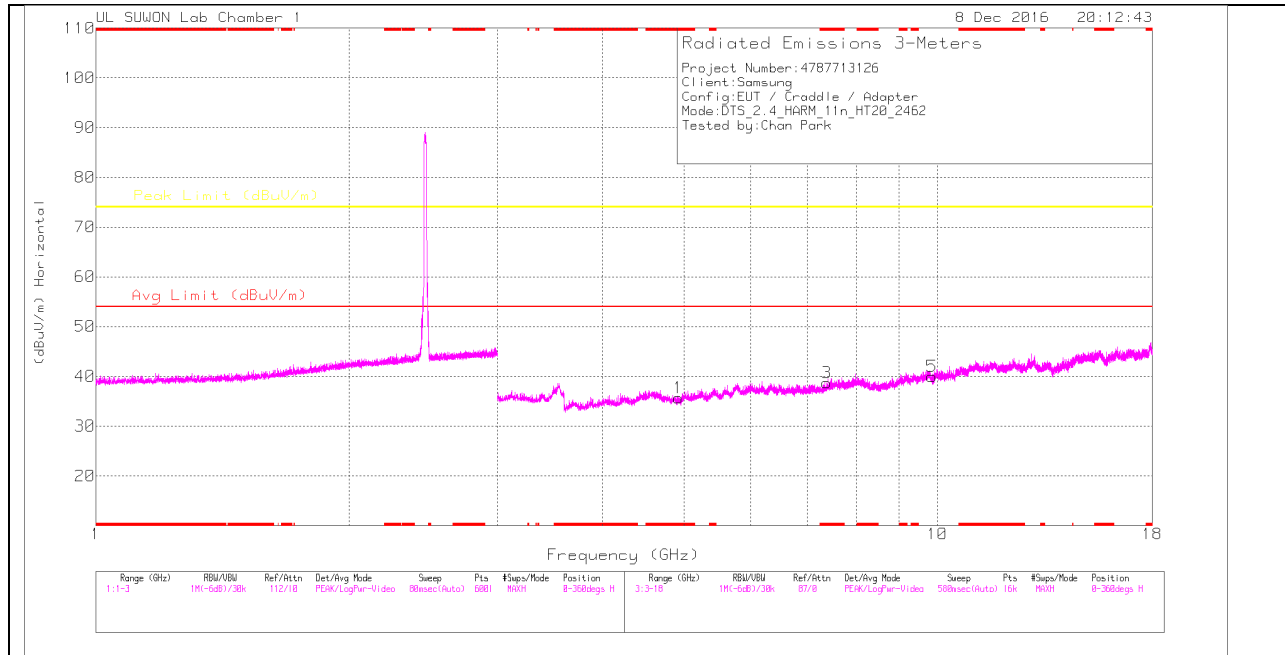

HIGH CHANNEL VERTICAL

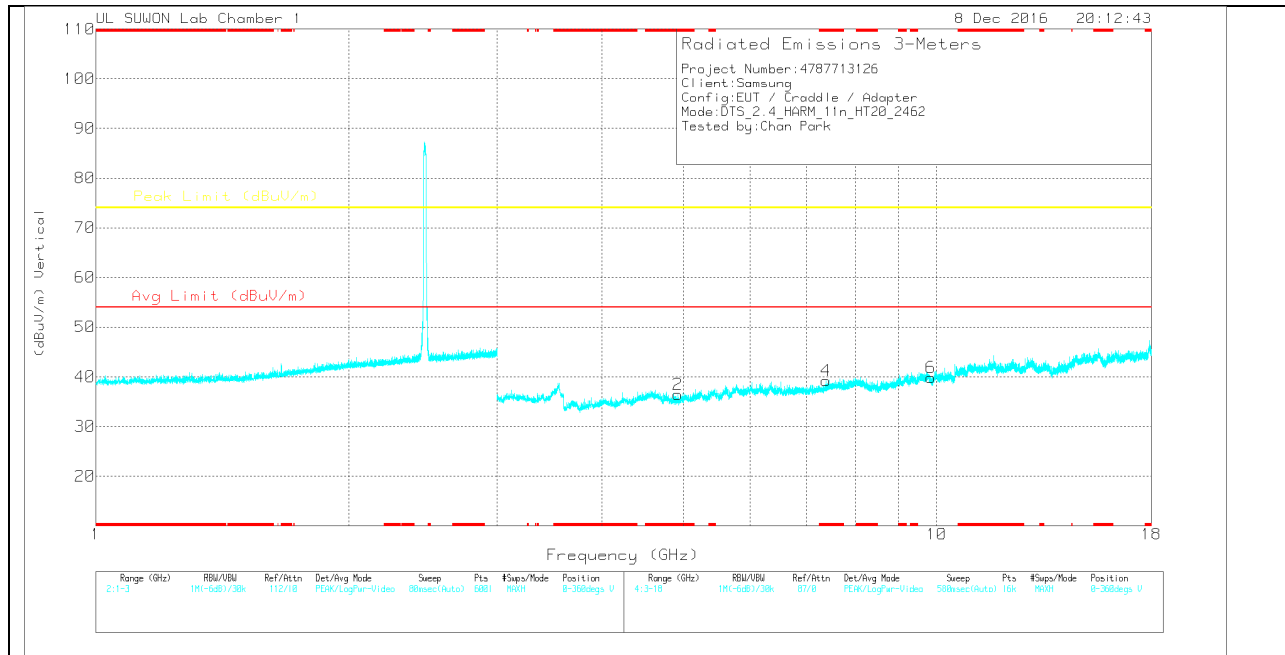

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.926	35.05	PK	34	-33.4	0	35.65	-	-	74	-38.35	0-360	250	H
3	* 7.384	33.47	PK	35.8	-30.6	0	38.67	-	-	74	-35.33	0-360	150	H
5	9.85	30.14	PK	37.3	-27.5	0	39.94	-	-	74	-34.06	0-360	150	H
2	* 4.92	35.9	PK	34	-33.4	0	36.5	-	-	74	-37.5	0-360	250	V
4	* 7.38	34.04	PK	35.8	-30.6	0	39.24	-	-	74	-34.76	0-360	250	V
6	9.843	29.95	PK	37.3	-27.4	0	39.85	-	-	74	-34.15	0-360	150	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

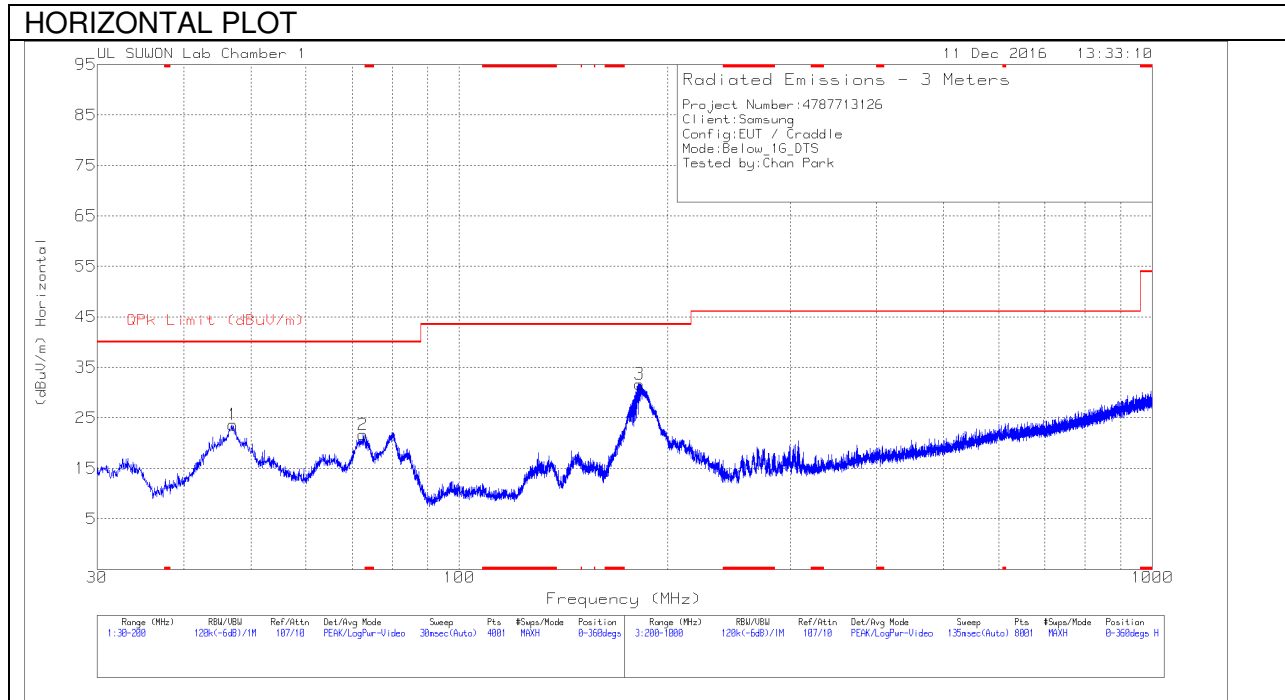

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

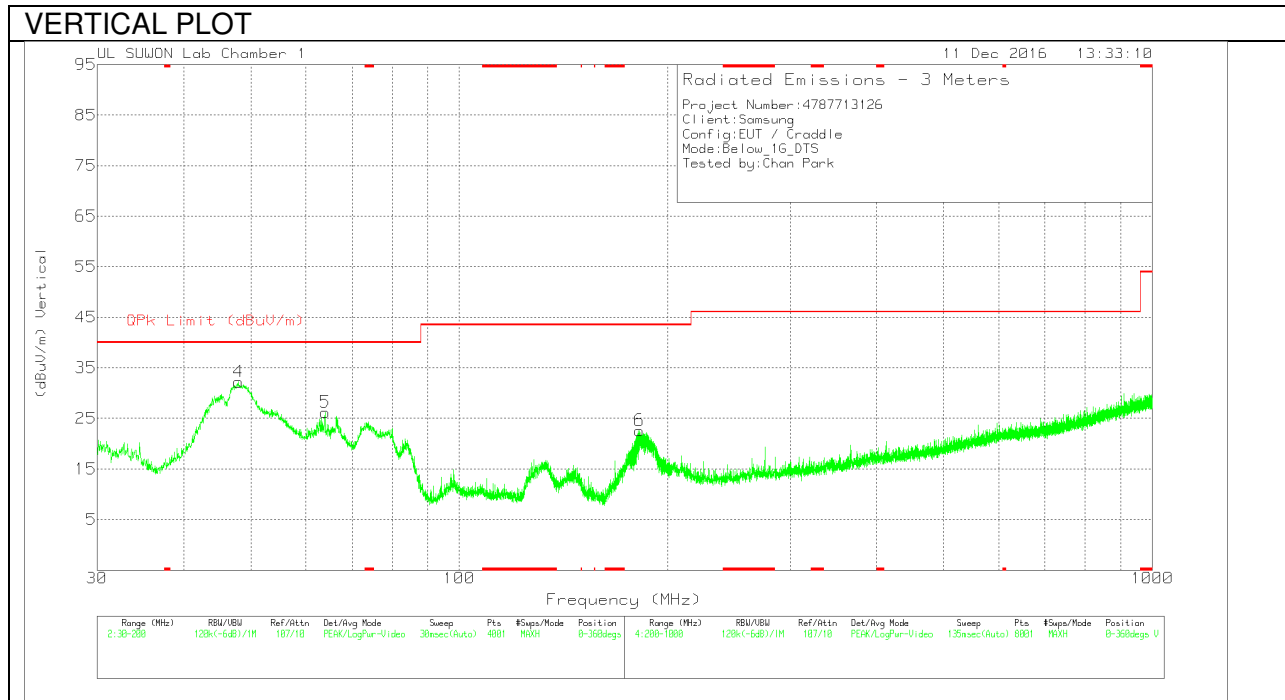

Below 1G Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	47.1275	40.12	Pk	13.7	-30.2	23.62	40	-16.38	0-360	300	H
2	72.6275	42.46	Pk	8.9	-29.7	21.66	40	-18.34	0-360	300	H
3	182.065	50.39	Pk	9.6	-28.3	31.69	43.52	-11.83	0-360	100	H
4	47.9775	48.61	Pk	13.8	-30.2	32.21	40	-7.79	0-360	100	V
5	64.0425	44.71	Pk	11.4	-29.9	26.21	40	-13.79	0-360	100	V
6	181.81	41.3	Pk	9.6	-28.3	22.6	43.52	-20.92	0-360	200	V

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
182.1356	50.27	Qp	9.6	-28.3	31.57	43.52	-11.95	214	135	H
47.3255	45.04	Qp	13.7	-30.2	28.54	40	-11.46	139	100	V

Qp - Quasi-Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS

LINE 1 PLOT

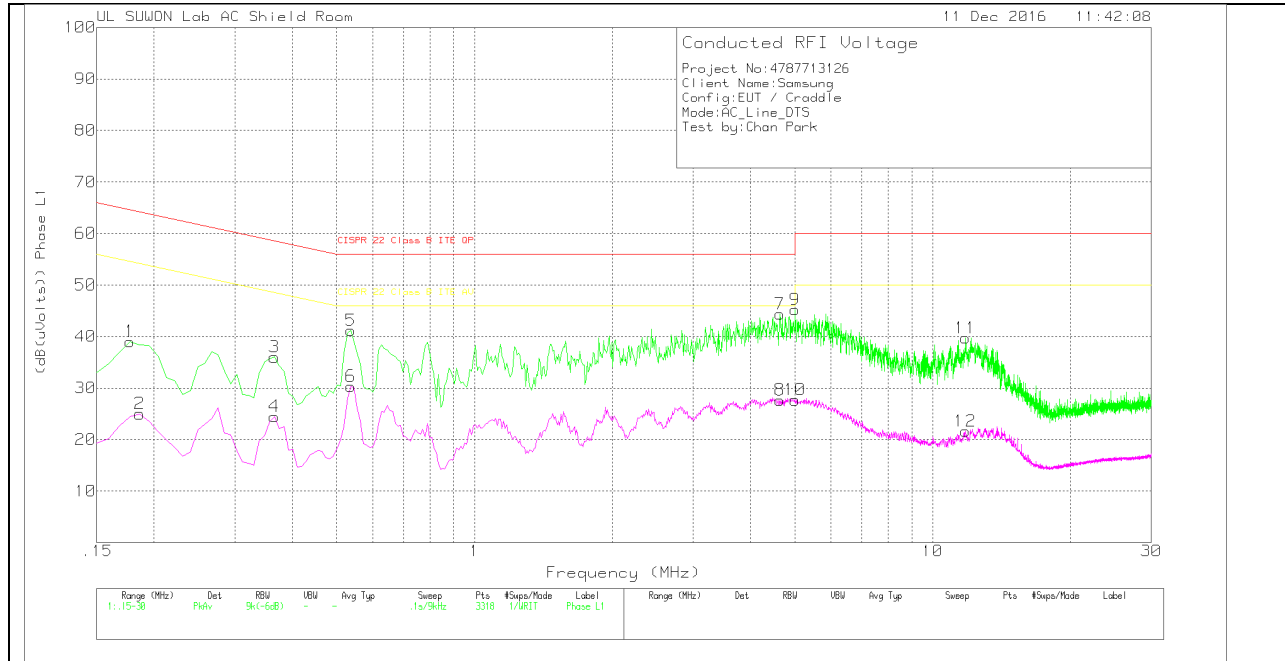

LINE 1 RESULTS


Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_L1	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.177	28.83	Pk	10.2	0	39.03	64.63	-25.6	-	-
2	.186	14.89	Av	10.1	0	24.99	-	-	54.21	-29.22
3	.366	25.9	Pk	10.1	0	36	58.59	-22.59	-	-
4	.366	14.38	Av	10.1	0	24.48	-	-	48.59	-24.11
5	.537	31.05	Pk	10.1	0	41.15	56	-14.85	-	-
6	.537	20.23	Av	10.1	0	30.33	-	-	46	-15.67
7	4.641	34.47	Pk	9.8	.1	44.37	56	-11.63	-	-
8	4.641	17.76	Av	9.8	.1	27.66	-	-	46	-18.34
9	5.01	35.31	Pk	9.8	.1	45.21	60	-14.79	-	-
10	5.001	17.79	Av	9.8	.1	27.69	-	-	50	-22.31
11	11.787	29.38	Pk	10.1	.2	39.68	60	-20.32	-	-
12	11.778	11.3	Av	10.1	.2	21.6	-	-	50	-28.4

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

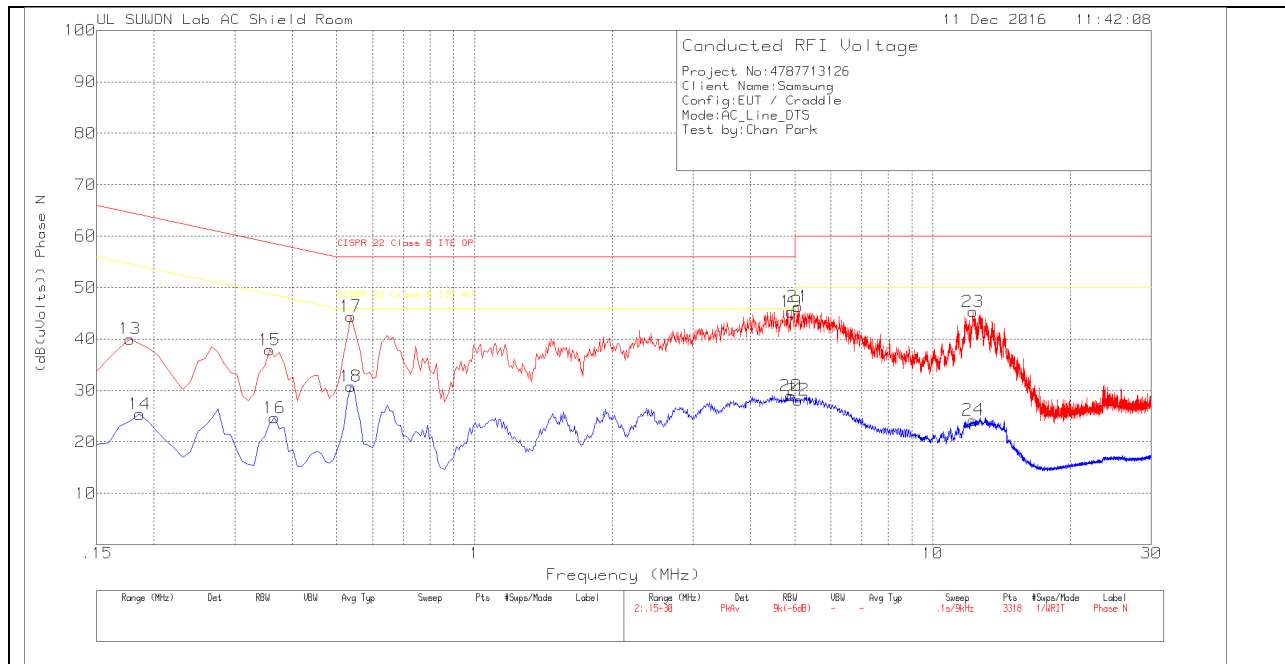

LINE 2 RESULTS

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_N	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.177	29.92	Pk	10.1	0	40.02	64.63	-24.61	-	-
14	.186	15.37	Av	10	0	25.37	-	-	54.21	-28.84
15	.357	27.88	Pk	10	0	37.88	58.8	-20.92	-	-
16	.366	14.6	Av	10.1	0	24.7	-	-	48.59	-23.89
17	.537	34.28	Pk	10.1	0	44.38	56	-11.62	-	-
18	.537	20.66	Av	10.1	0	30.76	-	-	46	-15.24
19	4.911	35.39	Pk	9.8	.1	45.29	56	-10.71	-	-
20	4.902	19.04	Av	9.8	.1	28.94	-	-	46	-17.06
21	5.082	36.38	Pk	9.8	.1	46.28	60	-13.72	-	-
22	5.091	18.25	Av	9.8	.1	28.15	-	-	50	-21.85
23	12.237	34.94	Pk	10.2	.2	45.34	60	-14.66	-	-
24	12.264	13.84	Av	10.2	.2	24.24	-	-	50	-25.76

Pk - Peak detector

Av - Average detection