

# FCC BT LE REPORT

## Class II Permissive Change

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Address:**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Date of Issue:**

21 November 2019

**Test Site/Location:**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-1911-FC015-R2**FCC ID:****A3LSMR825****APPLICANT:****SAMSUNG Electronics Co., Ltd.****Model:**

SM-R825F

**EUT Type:**

Smart Watch

**Average Output Power:**

8.83 dBm (7.638 mW)

**Frequency Range:**

2402 MHz -2480 MHz

**Modulation type**

GFSK

**FCC Classification:**

Digital Transmission System(DTS)

**FCC Rule Part(s):**

Part 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

**Report prepared by : Jung Ki Lim****Engineer of Telecommunication testing center****Approved by : Jong Seok Lee****Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1911-FC015	15 November 2019	- First Approval Report
HCT-RF-1911-FC015-R1	20 November 2019	- Revised the model name (page 1) - Deleted statement to refer to the duty cycle specified in Section 9.1 (page 17,19) - Added the note ( page 22)
HCT-RF-1911-FC015-R2	21 November 2019	-Added the duty cycle information ( page 19) - Removed the conducted equipment list

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

# Table of Contents

1. EUT DESCRIPTION .....	4
2. TEST METHODOLOGY .....	5
EUT CONFIGURATION .....	5
EUT EXERCISE .....	5
GENERAL TEST PROCEDURES .....	5
DESCRIPTION OF TEST MODES .....	6
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS .....	6
FACILITIES .....	6
EQUIPMENT .....	6
5. ANTENNA REQUIREMENTS .....	7
6. MEASUREMENT UNCERTAINTY .....	7
7. DESCRIPTION OF TESTS .....	8
8. SUMMARY TEST OF RESULTS .....	22
9. TEST RESULT .....	23
9.1 RADIATED SPURIOUS EMISSIONS .....	23
9.2 RADIATED RESTRICTED BAND EDGES .....	30
10. LIST OF TEST EQUIPMENT .....	34
11. ANNEX A_ TEST SETUP PHOTO .....	35

## 1. EUT DESCRIPTION

<b>Model</b>	SM-R825F	
<b>EUT Type</b>	Smart Watch	
<b>Power Supply</b>	DC 3.85 V	
<b>Battery Information</b>	Model: EB-BR820ABY Type: Li-ion Battery	
<b>Wireless PAD</b>	Model : EP-OR825 Manufacture: SEV	
<b>Frequency Range</b>	2402 MHz - 2480 MHz	
<b>Max. RF Output Power</b>	Peak (For information only)	1M 37Byte : 9.214 dBm (8.344 mW) 1M 255Byte : 9.066 dBm (8.065 mW)
	Average	1M 37Byte: 8.83 dBm (7.638 mW) 1M 255Byte: 8.71 dBm (7.430 mW)
<b>Modulation Type</b>	GFSK	
<b>Bluetooth Version</b>	5.0	
<b>Number of Channels</b>	40 Channels	
<b>Antenna Specification</b>	Antenna type: PIFA Peak Gain : -8.20 dBi	
<b>Date(s) of Tests</b>	September 15, 2019~ November 11, 2019	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032 ).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

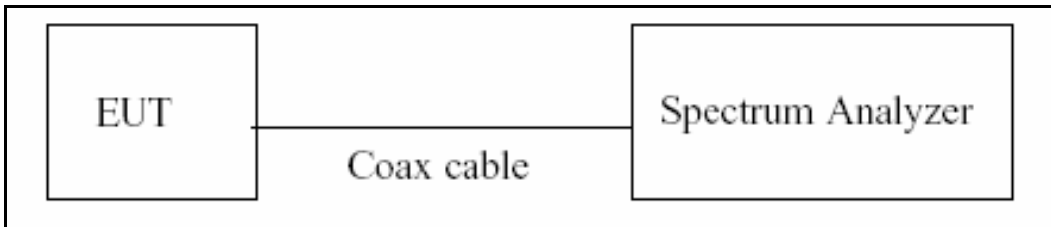

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$




## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400	10.65
2500	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53
26000	12.02

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


**7.6. Radiated Test**

**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


Below 30 MHz

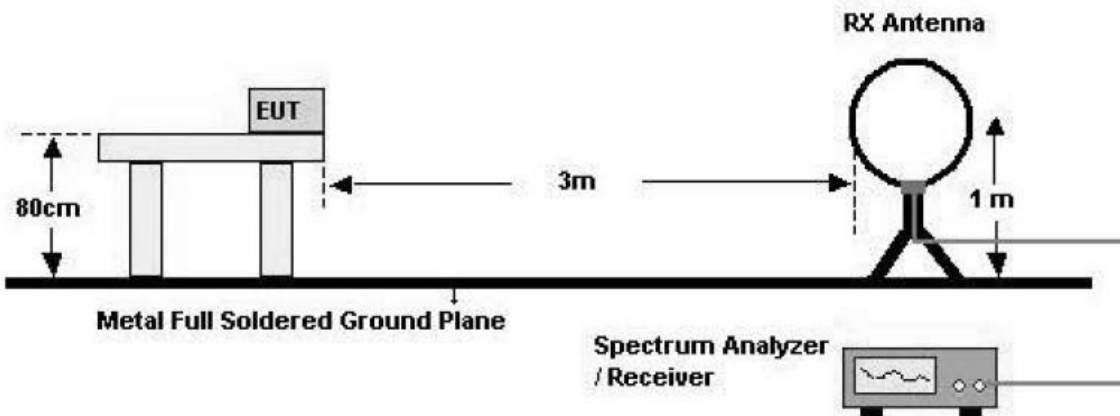

30 MHz - 1 GHz

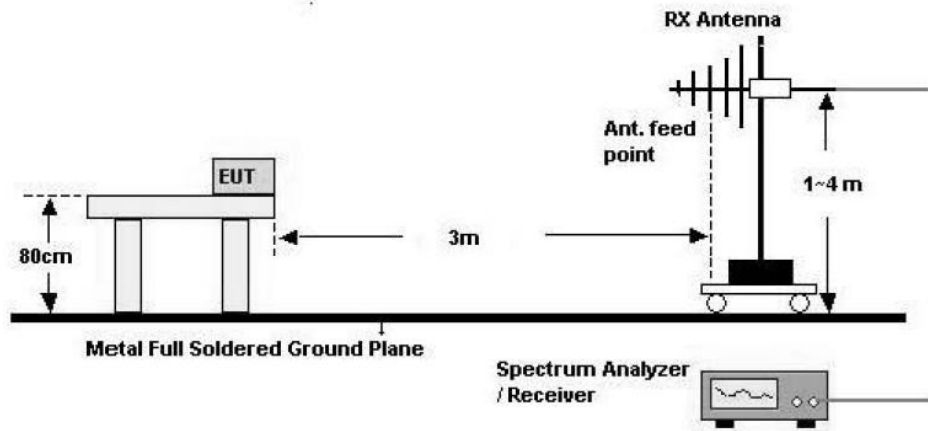

Above 1 GHz

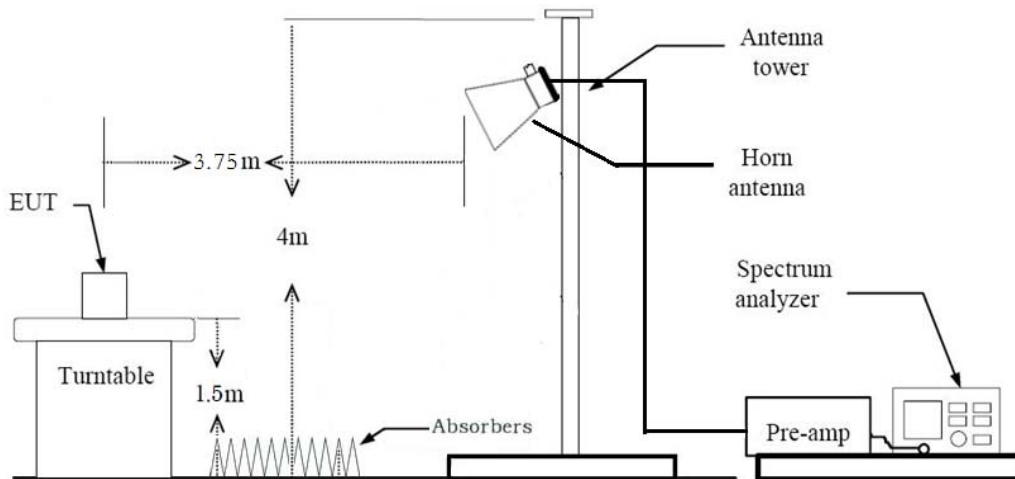

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance : 3 m

#### 8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 \times$  RBW

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

#### **KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### **Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

##### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.



**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

## 11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

## (1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

## (2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} + \text{Distance Factor(D.F)} + \text{Duty Cycle Factor}$$

**[Duty cycle information]**

Packet length (Byte)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
37	0.377	0.623	0.60	2.19
255	2.130	2.500	0.85	0.70

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Worst case configuration and mode

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories (Charging Doc+Travel Adapter)
  - Worstcase : Stand alone
2. EUT Axis:
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : Y
3. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

**8. SUMMARY TEST OF RESULTS**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result	Status
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS	NT <sup>Note2</sup>
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		<b>See Note3</b>	C <sup>Note4</sup>
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS	NT <sup>Note2</sup>
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS	NT <sup>Note2</sup>
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS	NT <sup>Note2</sup>
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS	PASS

**Note:**

1. C = Comply, NT = Not Tested, NA = Not Applicable, NC = Not Comply
2. C2PC model is electrically identical to the Original model.  
The Product Equality Declaration includes detailed information about the changes between the devices.
3. See SAR Report
4. We verified that max conducted output power remain same as original prior to performing the spot checks for radiated spurious emissions and band edge to confirm that the proposed changes had not adversely affected the previously reported values in the original filing.

## 9. TEST RESULT

### 9.1 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

**Mode : 1M Bit/s (37 Byte)**

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.05	0.00	-0.15	V	47.90	73.98	26.08	PK
4804	36.76	2.19	-0.15	V	38.80	53.98	15.19	AV
7206	48.73	0.00	9.23	V	57.96	73.98	16.03	PK
7206	33.94	2.19	9.23	V	45.35	53.98	8.63	AV
4804	48.33	0.00	-0.15	H	48.18	73.98	25.80	PK
4804	36.63	2.19	-0.15	H	38.67	53.98	15.32	AV
7206	47.59	0.00	9.23	H	56.82	73.98	17.17	PK
7206	34.03	2.19	9.23	H	45.44	53.98	8.54	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	47.06	0.00	0.33	V	47.39	73.98	26.59	PK
4880	35.99	2.19	0.33	V	38.51	53.98	15.48	AV
7320	46.78	0.00	8.89	V	55.67	73.98	18.31	PK
7320	34.62	2.19	8.89	V	45.70	53.98	8.29	AV
4880	47.74	0.00	0.33	H	48.07	73.98	25.91	PK
4880	36.08	2.19	0.33	H	38.60	53.98	15.39	AV
7320	46.57	0.00	8.89	H	55.46	73.98	18.52	PK
7320	34.58	2.19	8.89	H	45.66	53.98	8.33	AV



Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.28	0.00	0.33	V	48.61	73.98	25.37	PK
4960	37.10	2.19	0.33	V	39.62	53.98	14.37	AV
7440	45.74	0.00	9.43	V	55.17	73.98	18.81	PK
7440	34.07	2.19	9.43	V	45.69	53.98	8.29	AV
4960	48.81	0.00	0.33	H	49.14	73.98	24.84	PK
4960	37.14	2.19	0.33	H	39.66	53.98	14.33	AV
7440	46.08	0.00	9.43	H	55.51	73.98	18.47	PK
7440	34.17	2.19	9.43	H	45.79	53.98	8.19	AV

**Mode : 1M Bit/s (255 Byte)**

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	47.67	0.00	-0.15	V	47.52	73.98	26.46	PK
4804	36.59	0.70	-0.15	V	37.14	53.98	16.84	AV
7206	48.35	0.00	9.23	V	57.58	73.98	16.41	PK
7206	33.98	0.70	9.23	V	43.90	53.98	10.08	AV
4804	48.19	0.00	-0.15	H	48.04	73.98	25.94	PK
4804	36.70	0.70	-0.15	H	37.25	53.98	16.73	AV
7206	48.55	0.00	9.23	H	57.78	73.98	16.21	PK
7206	34.12	0.70	9.23	H	44.04	53.98	9.94	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	47.68	0.00	0.33	V	48.01	73.98	25.97	PK
4880	35.84	0.70	0.33	V	36.87	53.98	17.11	AV
7320	47.05	0.00	8.89	V	55.94	73.98	18.04	PK
7320	34.68	0.70	8.89	V	44.27	53.98	9.71	AV
4880	48.11	0.00	0.33	H	48.44	73.98	25.54	PK
4880	36.00	0.70	0.33	H	37.03	53.98	16.95	AV
7320	47.35	0.00	8.89	H	56.24	73.98	17.74	PK
7320	34.61	0.70	8.89	H	44.20	53.98	9.78	AV


Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.33	0.00	0.33	V	48.66	73.98	25.32	PK
4960	36.98	0.70	0.33	V	38.01	53.98	15.97	AV
7440	45.20	0.00	9.43	V	54.63	73.98	19.35	PK
7440	34.00	0.70	9.43	V	44.13	53.98	9.85	AV
4960	48.51	0.00	0.33	H	48.84	73.98	25.14	PK
4960	37.22	0.70	0.33	H	38.25	53.98	15.73	AV
7440	46.62	0.00	9.43	H	56.05	73.98	17.93	PK
7440	34.15	0.70	9.43	H	44.28	53.98	9.70	AV




☐ 1M Bit/s 255 Byte Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

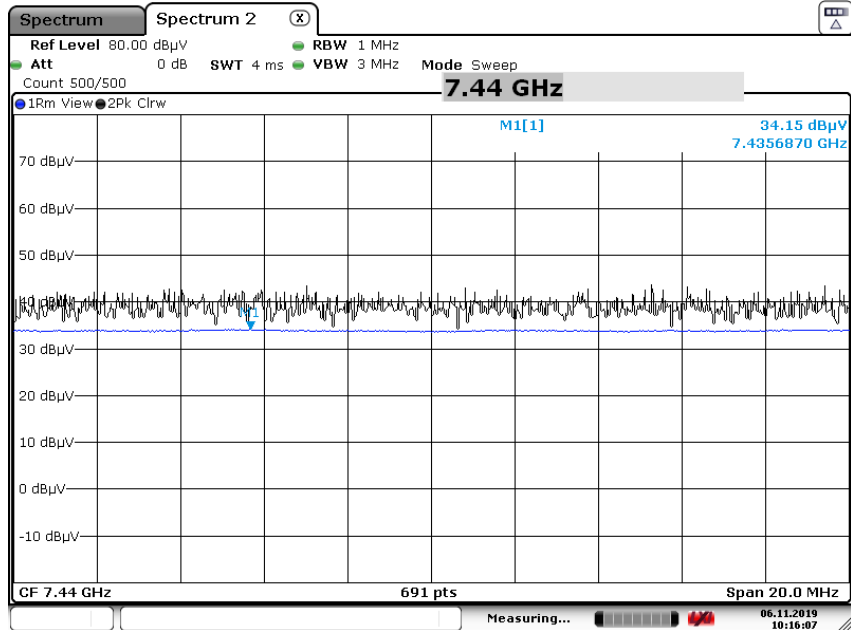

Date: 6.NOV.2019 10:16:06

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

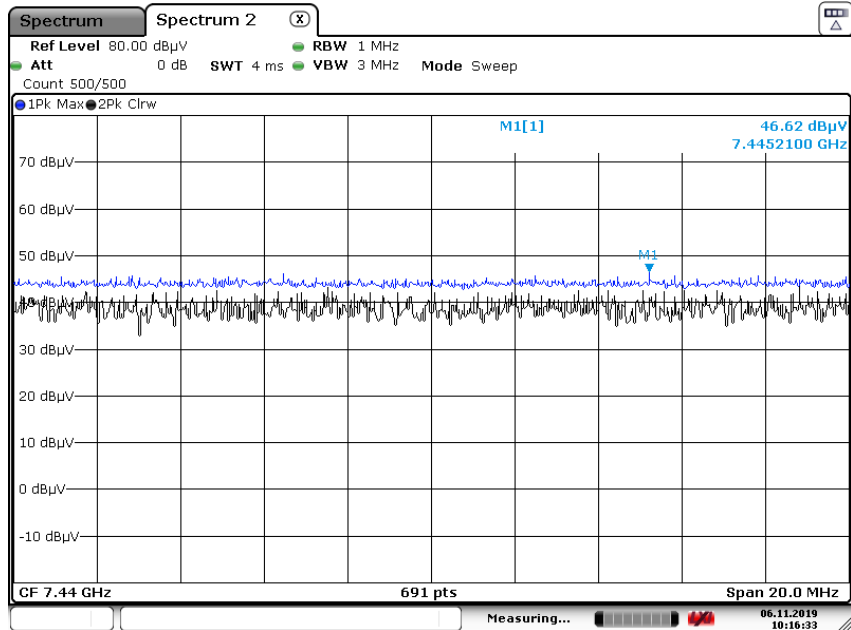

Date: 6.NOV.2019 10:16:33

**Note:**

Plot of worst case are only reported.

**9.2 RADIATED RESTRICTED BAND EDGES**

**Mode : 1M Bit/s 37 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.55	0.00	33.62	H	52.17	73.98	21.81	PK
2390.0	7.78	2.19	33.62	H	43.59	53.98	10.39	AV
2390.0	19.24	0.00	33.62	V	52.86	73.98	21.12	PK
2390.0	8.19	2.19	33.62	V	44.00	53.98	9.99	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	20.89	0.00	33.12	H	54.01	73.98	19.98	PK
2483.5	9.47	2.19	33.12	H	44.78	53.98	9.20	AV
2483.5	21.98	0.00	33.12	V	55.10	73.98	18.88	PK
2483.5	9.61	2.19	33.12	V	44.92	53.98	9.06	AV

**Mode : 1M Bit/s 255 byte**

Operating Frequency 2402 MHz  
 Channel No. 0


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.05	0.00	33.62	H	51.67	73.98	22.31	PK
2390.0	7.61	0.70	33.62	H	41.93	53.98	12.05	AV
2390.0	18.73	0.00	33.62	V	52.35	73.98	21.63	PK
2390.0	7.67	0.70	33.62	V	41.99	53.98	11.99	AV

Operating Frequency 2480 MHz  
 Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.04	0.00	33.12	H	52.16	73.98	21.82	PK
2483.5	9.52	0.70	33.12	H	43.33	53.98	10.65	AV
2483.5	21.28	0.00	33.12	V	54.40	73.98	19.58	PK
2483.5	9.69	0.70	33.12	V	43.51	53.98	10.47	AV

☐ Mode : 1M Bit/s (37 Byte) Test Plots (Worst case : Y-V)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

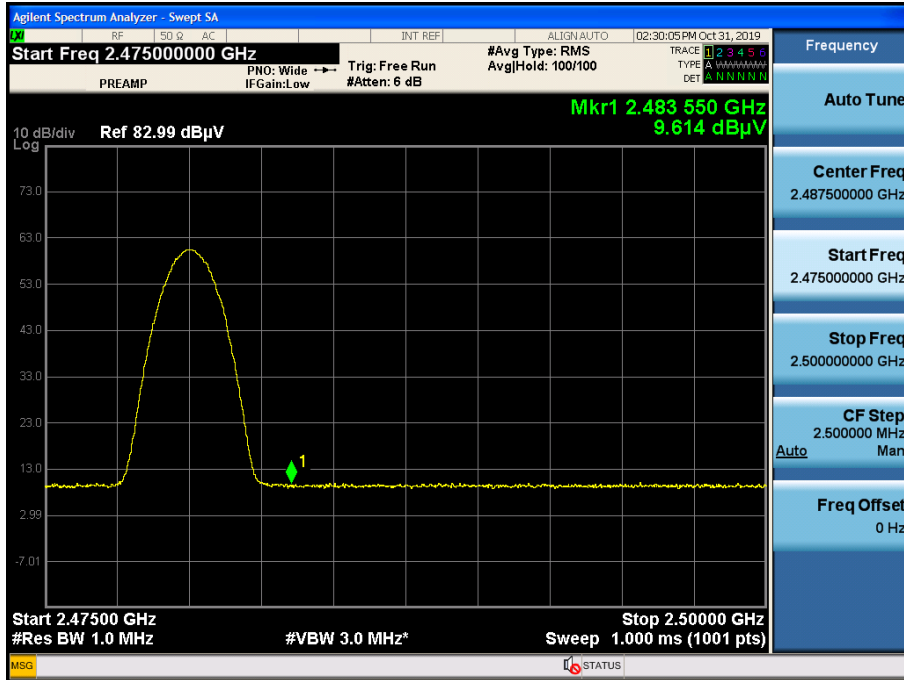

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

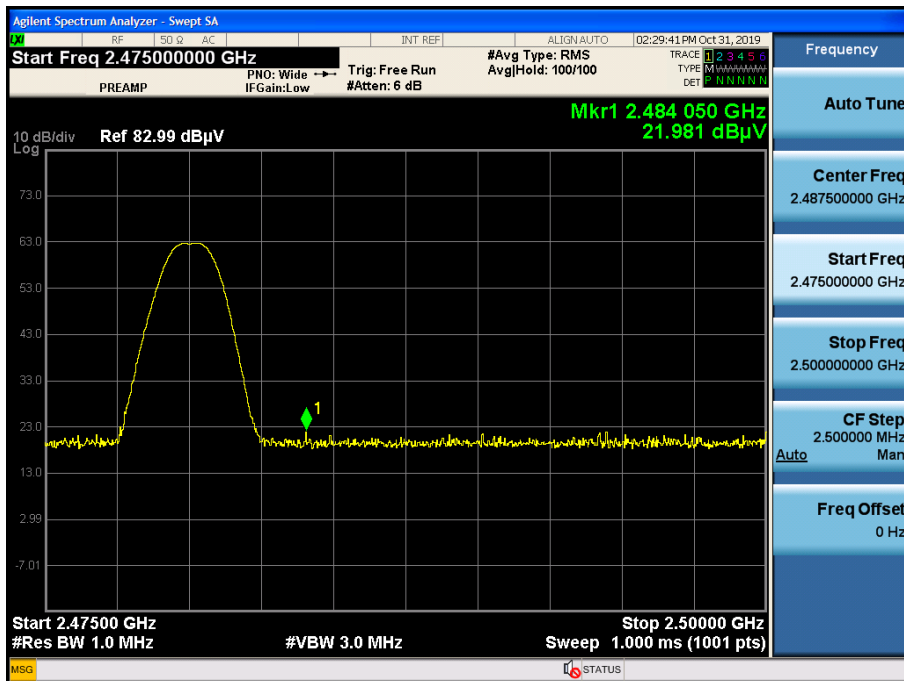


**Note:**

Plot of worst case are only reported.




☐ Mode : 1M Bit/s (255 Byte) Test Plots (Worst case : Y-V)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

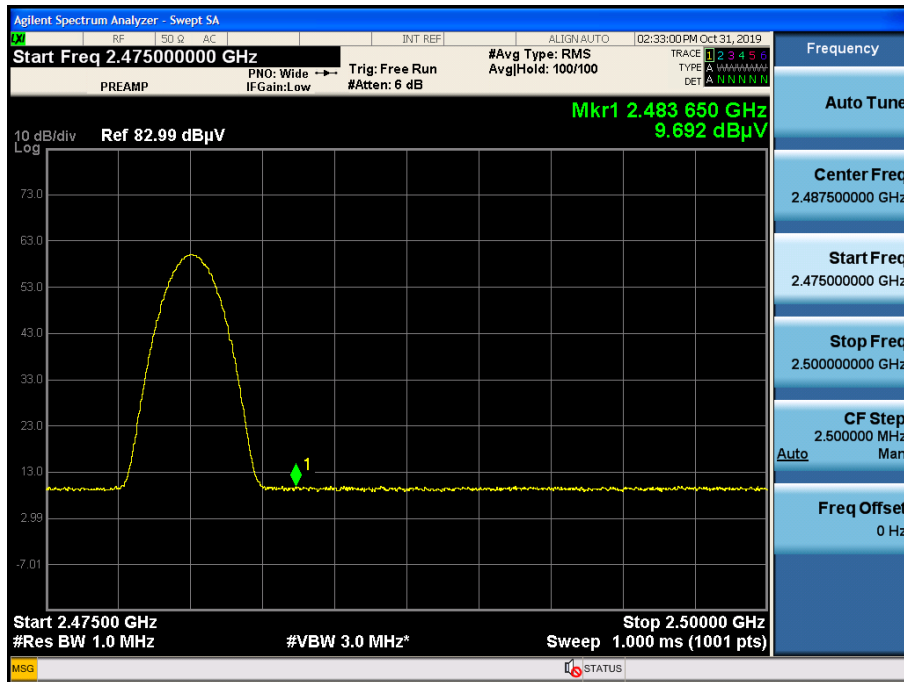

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

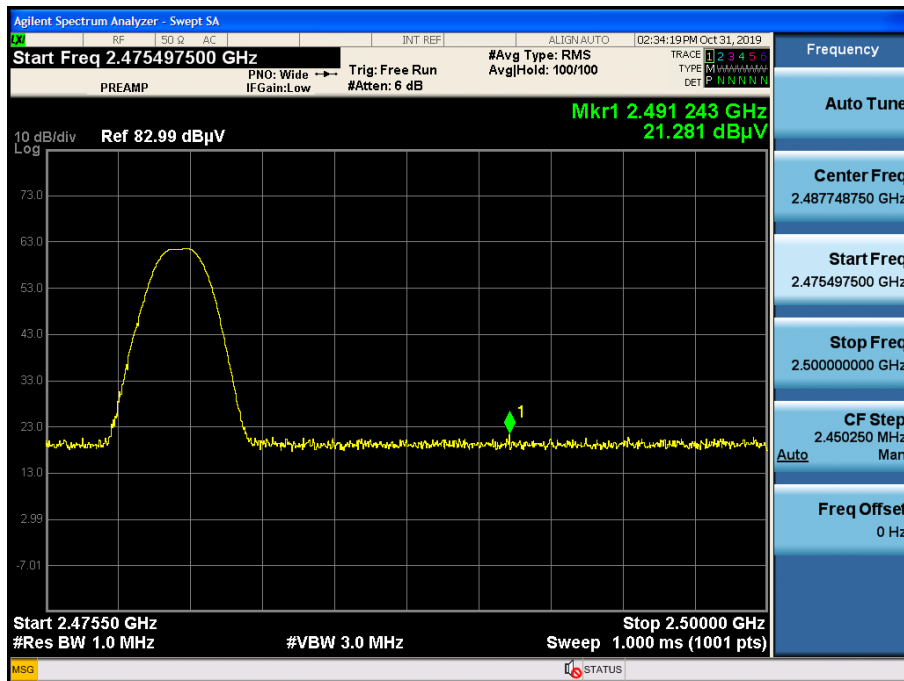

**Note:**

Plot of worst case are only reported.

## 10. LIST OF TEST EQUIPMENT

### Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	05/09/2019	Annual	100854
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	05/23/2019	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/15/2019	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/01/2019	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/01/2019	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1911-FC015-P