






# TEST REPORT

<b>Eurofins KCTL Co.,Ltd.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-70-5008-1021 Fax: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: <b>KR23-SEF0089</b> Page (1) of (25)	
<b>1. Client</b> <ul style="list-style-type: none"> <li>◦ Name : Samsung Electronics Co., Ltd.</li> <li>◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea</li> <li>◦ Date of Receipt : 2023-03-23</li> </ul>		
<b>2. Use of Report</b> : Certification		
<b>3. Name of Product / Model</b> : Smart wearable / SM-R955U		
<b>4. Manufacturer / Country of Origin</b> : Samsung Electronics Co., Ltd. / Vietnam		
<b>5. Date of Test</b> : 2023-05-15 to 2023-05-16		
<b>6. Location of Test</b> : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)		
<b>7. Test method used</b> : 47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014		
<b>8. FCC ID</b> : A3LSMR955		
<b>9. Test Results</b> : Refer to the test result in the test report		
Affirmation	Tested by  Name : Byunghwan Min (Signature)	Technical Manager  Name : Moonseop Cho (Signature)
2023-05-19		
<b>Eurofins KCTL Co.,Ltd.</b>		
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.		

## REPORT REVISION HISTORY

Date	Revision	Page No
2023-05-19	Originally issued	-

*This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

## General remarks for test reports

### Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:


#### Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

# Contents

<b>1. Applicant information .....</b>	<b>4</b>
<b>2. Laboratory information.....</b>	<b>5</b>
<b>3. Test system configuration.....</b>	<b>5</b>
3.1 Operation environment.....	6
3.2 Measurement Uncertainty .....	7
<b>4. Description of EUT .....</b>	<b>9</b>
4.1 General information.....	9
4.2 Product description.....	10
4.3 Auxiliary equipments .....	10
4.4 Test configuration .....	11
4.5 Operating conditions .....	13
<b>5. Summary of test results .....</b>	<b>14</b>
5.1 Summary of EMI emission test results .....	14
<b>6. Test results .....</b>	<b>15</b>
6.1 Conducted Emissions.....	15
6.2 Radiated Emission .....	18

<b>Eurofins KCTL Co.,Ltd.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-31-285-0894 Fax: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: KR23-SEF0089 Page (4) of (25)	   KCTL
--	---	--

## 1. Applicant information

**Applicant:** Samsung Electronics Co., Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Manufacturer:** Samsung Electronics Co., Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Factory #1:** AG TECH CO.,LTD  
**Address:** Lot G3, Que Vo Industrial Park(Expanded Area), Nam son Ward,  
Bac Ninh Province, Vietnam

**Factory #2:** ALMUS VINA  
**Address:** Lot CN07A, Phu Ha Industrial Park, Ha Thach Commune,  
Phu Tho Town, Phu Tho Province, Vietnam

## 2. Laboratory information

### Address

#### **Eurofins KCTL Co.,Ltd. (Suwon Lab.)**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 70 5008 1021

Facsimile Number: 82 505 299 8311


FCC Site Designation No: KR0040

VCCI Registration No.: R-20080, G-20078, C-20059, T-20056

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**

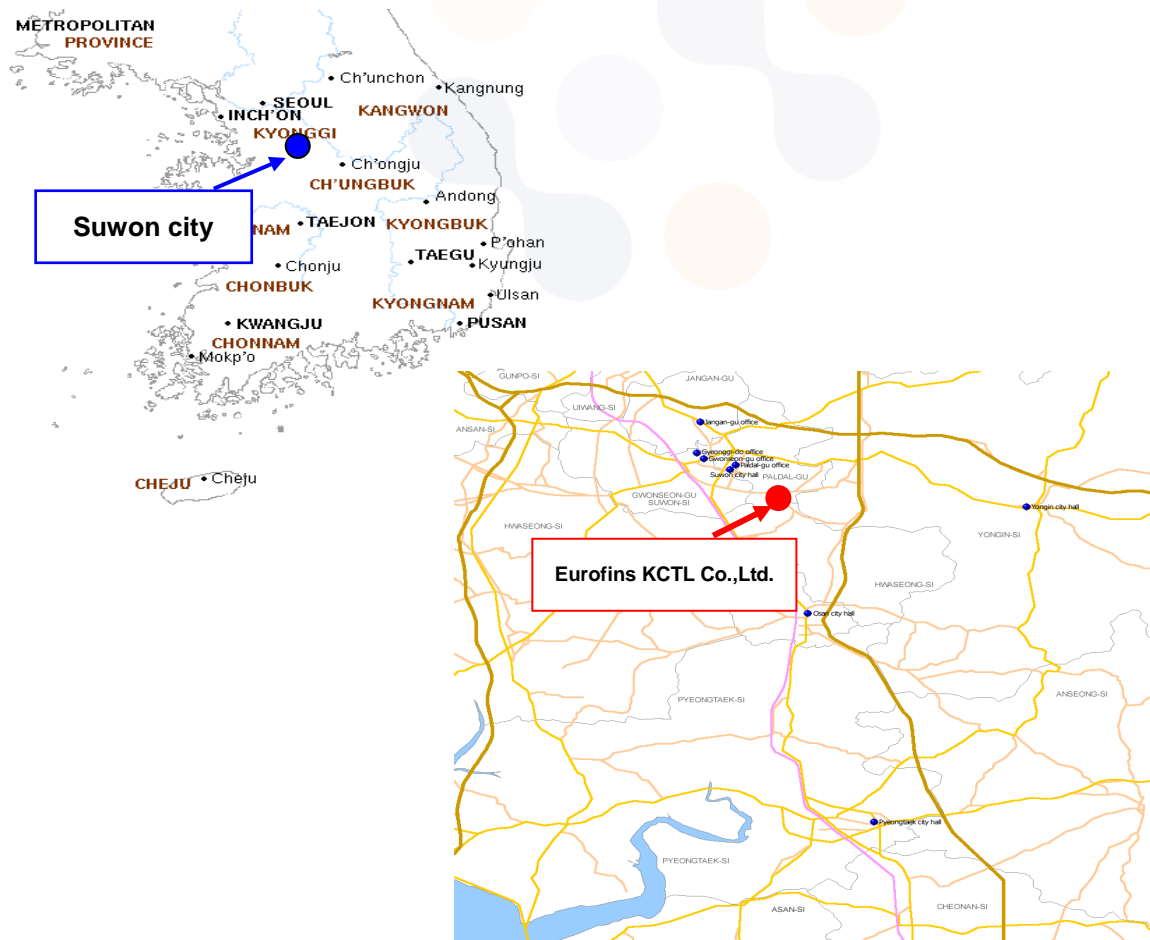

### 3. Test system configuration

#### 3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber 10 m (RE)	22.8 °C	32.4 % R.H.	-
Shielded room(CE)	22.6 °C	30.0 % R.H.	-

#### Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted Emission measurement (Confidence level about 95 %, $k = 2$ )			
Shielded Room (CE#1)	9 kHz ~ 150 kHz:	3.58 dB	
	150 kHz ~ 30 MHz:	3.16 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz:	3.58 dB	
	150 kHz ~ 30 MHz:	3.16 dB	
Radiated Emission measurement (Confidence level about 95 %, $k = 2$ )			
10 m Chamber (4F)	30 MHz ~ 300 MHz	3 m:	4.96 dB
		10 m:	4.96 dB
	300 MHz ~ 1 000 MHz	3 m:	4.08 dB
		10 m:	4.06 dB
	1 GHz ~ 6 GHz	3 m:	5.52 dB
	6 GHz ~ 18 GHz	3 m:	6.18 dB
	18 GHz ~ 30 GHz	3 m:	5.00 dB
30 GHz ~ 40 GHz	3 m:	4.50 dB	
10 m Chamber (2F)	30 MHz ~ 300 MHz	3 m:	4.50 dB
		10 m:	4.50 dB
	300 MHz ~ 1 000 MHz	3 m:	3.50 dB
		10 m:	3.48 dB
	1 GHz ~ 6 GHz	3 m:	5.04 dB
6 GHz ~ 18 GHz	3 m:	6.10 dB	

### 3.3 Measurement Program

These test items were performed by software programs;

Test item	Measurement Program		Used
Conducted Emission	EP5/CE_Ver 5.4.0(TOYO)		☒
Radiated Emission	2F	EP10/RE_Ver 2021.01.000 (TOYO)	☒
	4F	EP5/RE_Ver 5.11.10(TOYO)	





## 4. Description of EUT

### 4.1 General information

Declared Hardware Version	REV1.0
Declared Software Version	SM-R955U_R955U.001, SM-R955F_R955F.001
Operating Band(s)	WCDMA 2/4/5 LTE 2/4/5/7/12/13/25/26/66/71



## 4.2 Product description


Type of product	Smart wearable
Model name (Basic)	SM-R955U
Model name (Variant)	SM-R955F
Difference	SW Difference
Serial no	-
Testing voltage	120 V, 60 Hz / DC 3.88 V
Input/Output rating	120 V, 60 Hz (Power supplied from Wireless Charger Adapter) DC 3.88 V (Built in Battery)
Internal clock frequency	Above 108 MHz
RF Frequency	LTE Band 5_869 MHz ~ 894 MHz LTE Band 12_729 MHz ~ 746 MHz LTE Band 13_746 MHz ~ 756 MHz LTE Band 26_859 MHz ~ 894 MHz LTE Band 71_617 MHz ~ 652 MHz WCDMA 5: 869 MHz ~ 894 MHz
Note	-The following accessory was provided by the manufacturer. 1) Wireless Charger (EP-OR900) - FCC ID & IC: A3LEPOR900 / 649E-EPOR900

## 4.3 Auxiliary equipments

Type	Model / Part #	S/N	Manufacturer
Wireless Charger	EP-OR900	-	SAMSUNG
Adapter	EP-TA800	-	DONGYANG E&P VIETNAM CO.,LTD.
Radio Communication Tester	CMW500	-	R&S
Spiral ANT	-	-	-


## 4.4 Test configuration

[Test #1]

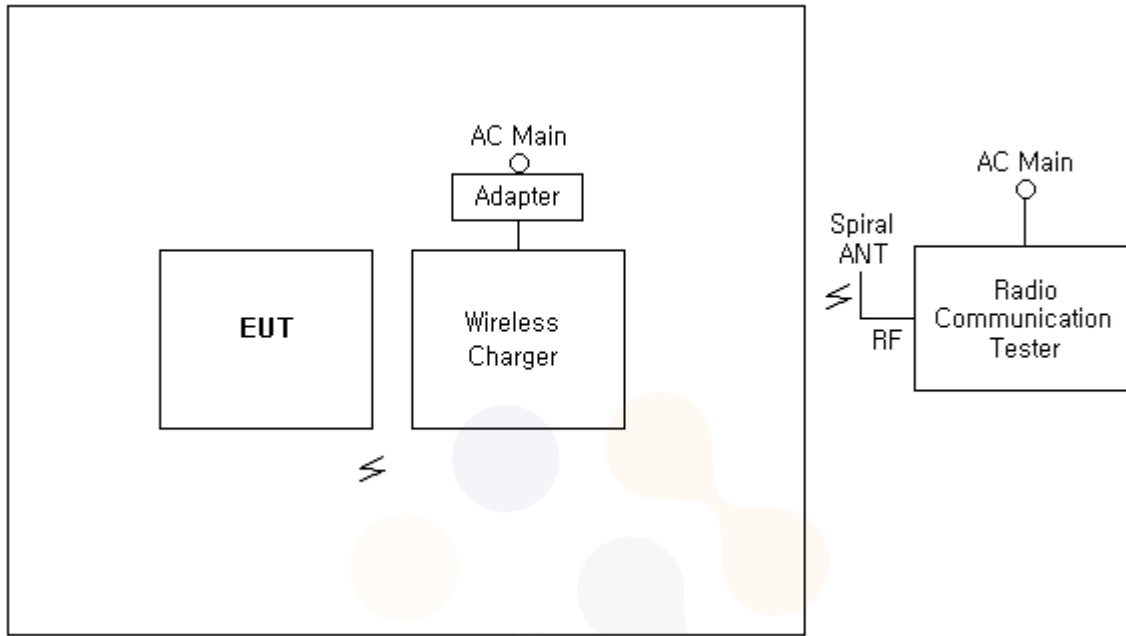

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	<b>EUT</b>	-	-	-	-	-
2	Wireless Charger	USB	Adapter	-	0.9	Unshield
3	Radio Communication Tester	RF	Spiral ANT	-	3.0	Shield

[Test #2]

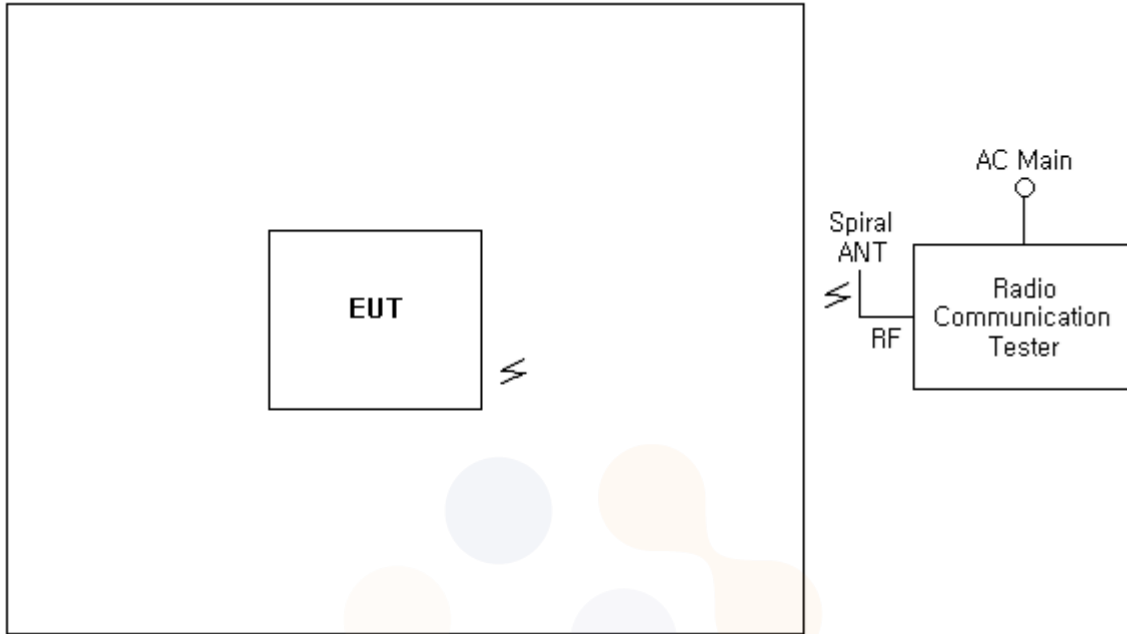

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	<b>EUT</b>	-	-	-	-	-
2	Radio Communication Tester	RF	Spiral ANT	-	3.0	Shield

## 4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
Test #1	Wireless Charging(w/TA) + Cellular receiver (LTE 26_Middle)
Test #2	Battery + Cellular receiver (LTE 26_Middle)

Note 1. All cellular RX bands operating below 960 MHz, including WCDMA and LTE have been investigated with low/middle/high channels. Among the bands, LTE 26\_Middel is the worst mode.

Note 2. It means this device needs to be tested with 3 orientations (x, y and z) and at least the worst case orientation shall be set for final test.

It was determined that Z orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z orientation.

## 5. Summary of test results

### 5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
<input checked="" type="checkbox"/>	Conducted Emission	47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014	Pass
<input checked="" type="checkbox"/>	Radiated Emission	47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014	Pass



## 6. Test results

### 6.1 Conducted Emissions

Testing voltage	120 V, 60 Hz		
Test facility	Shielded room (CE#1)		
Date	2023-05-15		
Temperature (°C)	22.6 °C	Humidity (% R.H.)	30.0 % R.H.
Remarks	Pass		

#### 6.1.1 Limits of conducted emissions measurement

Frequency [MHz]	Class A (dB( $\mu$ V))		Class B (dB( $\mu$ V))	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 <sup>1)</sup>	56 ~ 46 <sup>1)</sup>
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

<sup>1)</sup> The limit decreases linearly with the logarithm of frequency

### 6.1.2 Measurement procedure

The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement.


### 6.1.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESCI 3	101408	R&S	2023.08.18	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	ENV216	101358	R&S	2023.09.29	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	ENV216	101352	R&S	2024.03.28	<input type="checkbox"/>



### 6.1.4 Conducted emissions measurement result

#### AC Main

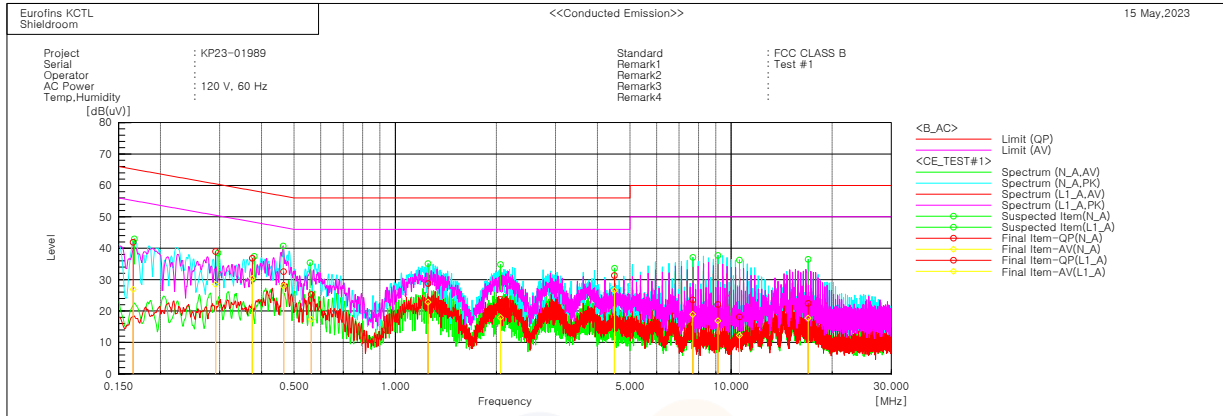

#### Final Result

--- N_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16575	31.7	16.7	10.2	41.9	26.9	65.2	55.2	23.3	28.3
2	0.29154	29.1	18.7	9.8	38.9	28.5	60.5	50.5	21.6	22.0
3	0.37527	26.9	20.5	9.9	36.8	30.4	58.4	48.4	21.6	18.0
4	0.56223	15.2	7.3	10.0	25.2	17.3	56.0	46.0	30.8	28.7
5	1.25182	19.0	13.0	9.8	28.8	22.8	56.0	46.0	27.2	23.2
6	2.05929	13.8	8.1	9.8	23.6	17.9	56.0	46.0	32.4	28.1
7	4.49396	21.4	16.7	9.9	31.3	26.6	56.0	46.0	24.7	19.4
8	7.69658	13.4	8.8	10.1	23.5	18.9	60.0	50.0	36.5	31.1
9	9.13576	11.8	6.7	10.2	22.0	16.9	60.0	50.0	38.0	33.1
10	10.58527	7.9	2.0	10.2	18.1	12.2	60.0	50.0	41.9	37.8
11	16.97005	11.7	7.0	10.7	22.4	17.7	60.0	50.0	37.6	32.3

--- L1_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.46512	22.7	18.0	9.9	32.6	27.9	56.6	46.6	24.0	18.7

## 6.2 Radiated Emission

Testing voltage	120 V, 60 Hz / DC 3.88 V		
Test facility	10 m Chamber (4F)		
Test distance	3 m		
Date	2023-05-16		
Temperature (°C)	22.8 °C	Humidity (% R.H.)	32.4 % R.H.
Remarks	Pass		

### 6.2.1 Limits of radiated emission measurement

Frequency [MHz]	Class A at 10 m QP(dB(μV/m))		Class B at 3 m QP(dB(μV/m))	
	FCC <sup>1)</sup>	ISED (ICES Issue 7)	FCC <sup>1)</sup>	ISED (ICES Issue 7)
30-88	39.1	40.0	40.0	40.0
88-216	43.5	43.5	43.5	43.5
216-230	46.4	46.4	46.0	46.0
230-960	46.4	47.0	46.0	47.0
Above 960	49.5	49.5	54.0	54.0

- <sup>1)</sup>: Alternative standard: CISPR, Pub. 22

- Test data in this section has been taken against the FCC 15.109(a) or (B) Limit as it is the most stringent limit.

By complying with more restrictive FCC 15.109 Limit compliance with the ICES-003 Issue 7 limit also demonstrated.

### 6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### 6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESCI 7	100872	R&S	2024.01.18	☒
Bilog Antenna	CBL 6112D	37876	TESEQ	2024.09.07	☒
AMPLIFIER	310N	293004	SONOMA	2023.08.18	☒
ATTENUATOR	8491B	MY39270292	AGILENT	-	☒
Antenna Mast	MA4640-XP-ET	-	Innco Systems	-	☒
Turn Table	DT3000-2t	-	Innco Systems	-	☒
DOUBLE RIDGED HORN ANTENNA	3117	00161083	ETS-LINDGREN	2024.01.27	☒
AMPLIFIER	BBV9718C	00138	SCHWARZBECK	2023.10.14	☒
Horn Antenna	3116C	00218560	ETS-LINDGREN	2024.03.27	☒
Amplifier	JS44-18004000-33-8P	2055879	L-3 Narda-MITEQ	2024.03.28	☒
PXA SIGNAL ANALYZER	N9030A	MY54170575	KEYSIGHT	2024.03.17	☒

### 6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB


The result is  $30 + 12 + 5 + 6 - 35 = 18 \text{ dB } (\mu\text{V/m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average

## 6.2.5 Radiated emission measurement result


30 MHz ~ 1 GHz

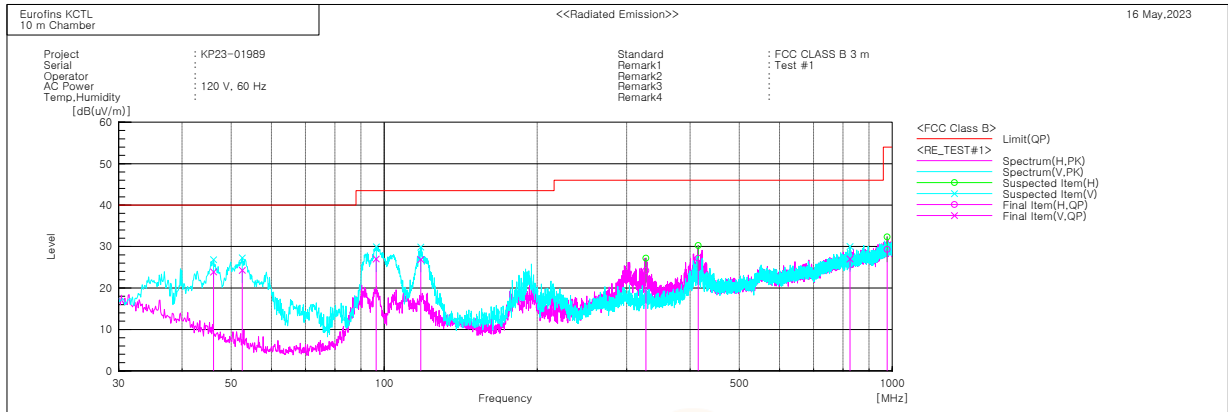

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c. f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	46.116	V	37.8	-13.9	23.9	40.0	16.1	192.0	342.0
2	52.542	V	40.9	-16.6	24.3	40.0	15.7	142.0	27.0
3	96.401	V	39.7	-12.7	27.0	43.5	16.5	123.0	124.0
4	118.020	V	37.4	-10.5	26.9	43.5	16.6	126.0	289.0
5	327.380	H	29.0	-4.8	24.2	46.0	21.8	220.0	268.0
6	415.077	H	28.2	-1.0	27.2	46.0	18.8	279.0	348.0
7	825.629	V	18.2	8.8	27.0	46.0	19.0	100.0	234.0
8	976.892	H	17.0	12.3	29.3	54.0	24.7	333.0	247.0


1 GHz ~ 18 GHz

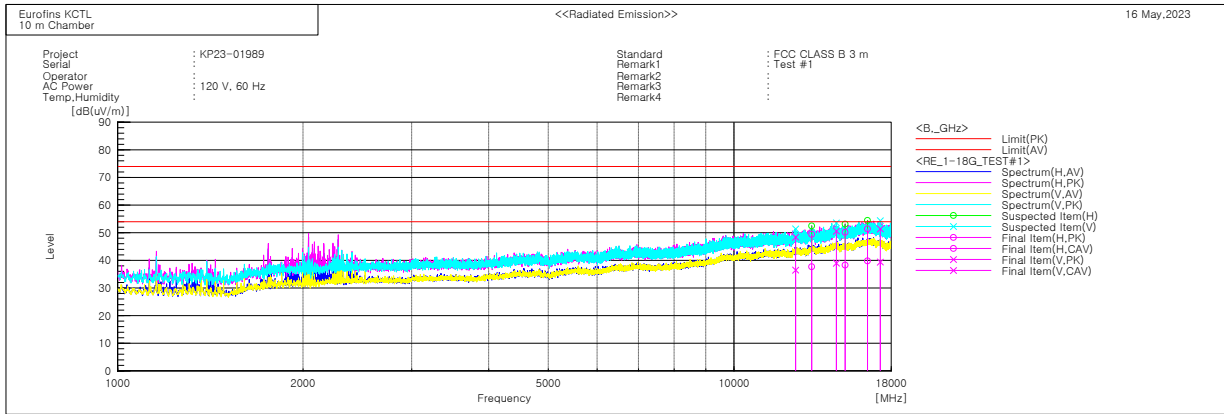

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	12592.870	V	31.8	19.9	16.6	48.4	36.5	74.0	54.0	25.6	17.5	135.0	101.0
2	13368.970	H	32.4	20.7	17.0	49.4	37.7	74.0	54.0	24.6	16.3	149.0	200.0
3	14862.700	V	33.5	21.9	17.1	50.6	39.0	74.0	54.0	23.4	15.0	245.0	114.0
4	15155.740	H	33.6	21.8	16.5	50.1	38.3	74.0	54.0	23.9	15.7	127.0	261.0
5	16469.080	H	32.6	21.0	18.8	51.4	39.8	74.0	54.0	22.6	14.2	139.0	72.0
6	17275.740	V	32.9	20.9	18.5	51.4	39.4	74.0	54.0	22.6	14.6	150.0	257.0


18 GHz ~ 30 GHz

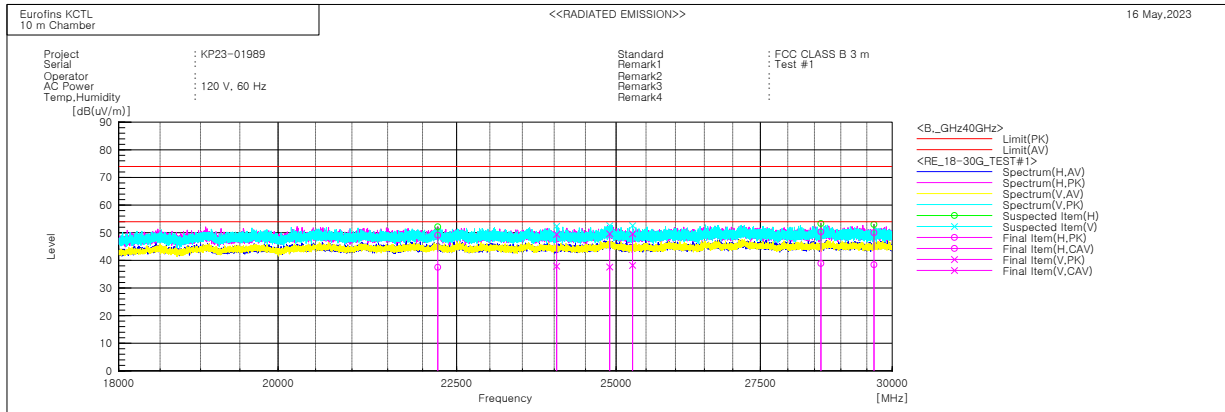

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	22222.450	H	46.4	34.8	2.7	49.1	37.5	74.0	54.0	24.9	16.5	135.0	155.0
2	24035.770	V	46.4	34.9	3.0	49.4	37.9	74.0	54.0	24.6	16.1	285.0	319.0
3	24893.140	V	45.8	33.8	3.8	49.6	37.6	74.0	54.0	24.4	16.4	125.0	55.0
4	25273.550	V	46.1	34.7	3.5	49.6	38.2	74.0	54.0	24.4	15.8	247.0	28.0
5	28619.380	H	46.3	34.9	4.0	50.3	38.9	74.0	54.0	23.7	15.1	329.0	78.0
6	29638.750	H	46.5	34.9	3.5	50.0	38.4	74.0	54.0	24.0	15.6	185.0	142.0


30 MHz ~ 1 GHz

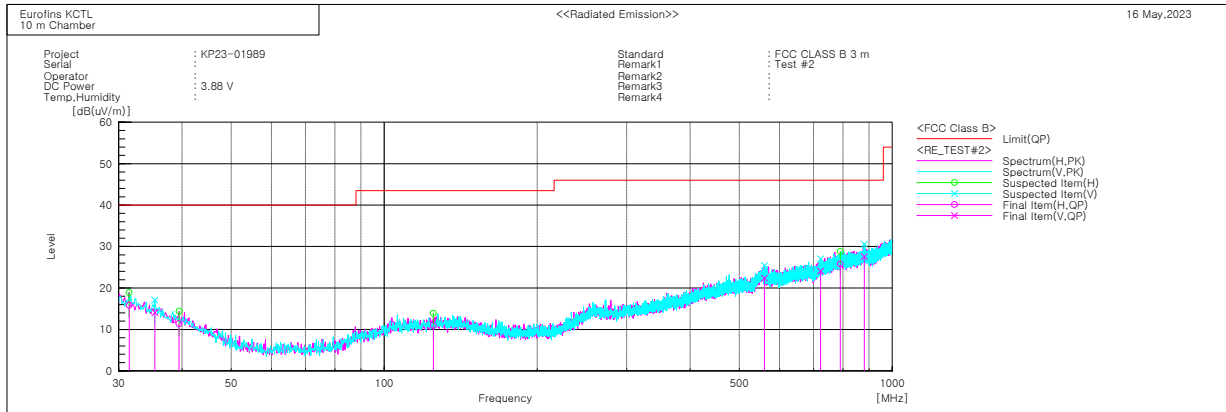

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	31.489	H	22.0	-6.2	15.8	40.0	24.2	300.0	299.0
2	35.357	V	22.3	-8.2	14.1	40.0	25.9	191.0	61.0
3	39.426	H	21.7	-10.3	11.4	40.0	28.6	246.0	185.0
4	124.911	H	20.9	-10.0	10.9	43.5	32.6	235.0	353.0
5	560.350	V	18.4	4.0	22.4	46.0	23.6	192.0	136.0
6	722.827	V	17.8	6.3	24.1	46.0	21.9	263.0	80.0
7	790.150	H	17.2	8.6	25.8	46.0	20.2	338.0	261.0
8	881.004	V	17.8	9.8	27.6	46.0	18.4	100.0	110.0

1 GHz ~ 18 GHz

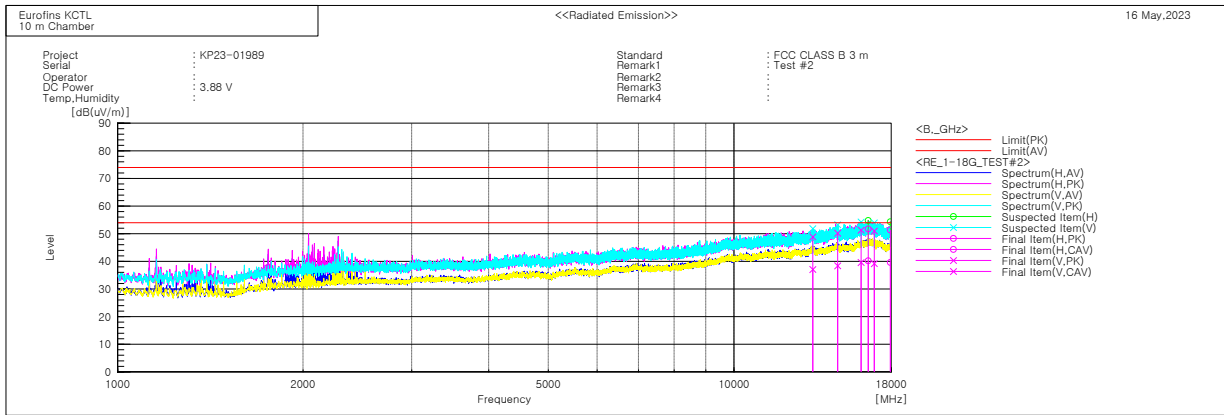

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	13431.020	V	31.7	19.9	17.2	48.9	37.1	74.0	54.0	25.1	16.9	128.0	231.0
2	14737.590	V	33.5	21.7	16.7	50.2	38.4	74.0	54.0	23.8	15.6	163.0	128.0
3	16083.170	V	33.6	21.9	17.7	51.3	39.6	74.0	54.0	22.7	14.4	100.0	59.0
4	16510.790	H	32.7	21.2	19.0	51.7	40.2	74.0	54.0	22.3	13.8	281.0	137.0
5	16896.670	V	31.6	19.8	19.4	51.0	39.2	74.0	54.0	23.0	14.8	253.0	345.0
6	17934.550	H	31.5	19.8	19.8	51.3	39.6	74.0	54.0	22.7	14.4	352.0	287.0



18 GHz ~ 30 GHz

