**MEASUREMENT REPORT**
FCC Part 15B**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

9/21 - 10/26/2018

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1811190204-07.A3L

FCC ID:

A3LSMS260DL

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S260DL

EUT Type:

Portable Handset

FCC Classification:

Part 15 Class B Computing Device Peripheral (JBP)

FCC Rule Part(s):

FCC Part 15 Subpart B

Test Procedure(s):

ANSI C63.4-2014

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2014 (See Test Report). Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 1 of 25	

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.1	PCTEST Test Location	3
1.2	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	SAMPLE CALCULATIONS	7
4.1	Conducted Emission Measurement Sample Calculation	7
4.2	Radiated Emission Measurement Sample Calculation	7
5.0	Measurement Uncertainty	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	Test Support Equipment	11
7.3	Radiated Measurement Data	13
7.4	Line Conducted Measurement Data	16
8.0	CONCLUSION	25

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 2 of 25	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.1 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.2 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 3 of 25	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS260DL**. The test data contained in this report pertains only to the emissions due to the digital circuitry of the EUT.

Test Device Serial No.: 17909, 18022, 24616, 07960

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)

2.3 Test Configuration

The EUT was tested with a laptop PC connected via USB interface port. The EUT was exercised during testing by means of software installed on the PC. Since the EUT is a peripheral device, the host PC was populated with another USB device and an additional peripheral device with a non-USB interface, as shown in Table 7-2, thus satisfying the minimum system requirement of two different I/O interfaces. All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

For more information please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 4 of 25

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.4. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 5 of 25

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 6 of 25	

4.0 SAMPLE CALCULATIONS

4.1 Conducted Emission Measurement Sample Calculation

@ 20.3 MHz

Class B limit = 60.0 dB μ V (Quasi-peak limit)
 Reading = - 57.8 dBm (calibrated quasi-peak level)
 Convert to dB μ V = - 57.8 + 107 = 49.2 dB μ V

 Margin = 49.2 - 60.0 = - 10.8 dB
 = 10.8 dB below limit

4.2 Radiated Emission Measurement Sample Calculation

@ 66.7 MHz

Class B limit = 100 μ V/m = 40.0 dB μ V/m
 Reading = - 76.0 dBm (calibrated level)
 Convert to dB μ V = - 76.0 + 107 = 31.0 dB μ V
 Antenna Factor + Cable Loss = 5.8 dB/m
 Total = 36.8 dB μ V/m

 Margin = 36.8 - 40.0 = - 3.2 dB
 = 3.2 dB below limit

Note:

$$\text{Level [dB}\mu\text{V]} = 20 \log_{10} (\text{Level } [\mu\text{V/m}])$$

$$\text{Level [dB}\mu\text{V]} = \text{Level [dBm]} + 107$$

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07-A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 7 of 25

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 8 of 25

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9038A	MXE EMI Receiver	6/11/2018	Annual	6/11/2019	MY51210133
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	6/18/2018	Biennial	6/18/2020	114451
Rohde & Schwarz	CMU200	Base Station Simulator	5/18/2018	Annual	5/18/2019	109892
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/21/2018	Annual	5/21/2019	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/18/2018	Annual	6/18/2019	102134
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 9 of 25

7.0 TEST DATA

7.1 Summary

Test Date(s): 9/21 - 10/26/2018

Test Engineer:



FCC Part 15 Section	Description	Result
15.107	Conducted Emissions	PASS
15.109	Radiated Emissions	PASS

Table 7-1. Summary of Test Results

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 10 of 25

7.2 Test Support Equipment

Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Samsung EVO SD Card	Model:	N/A	S/N:	N/A
Dell Laptop	Model:	Latitude E5570	S/N:	H6TYTF2
Dell AC Adapter	Model:	HA65NM130	S/N:	N/A
CISCO Router	Model:	Linksys E900	S/N:	12310C65201062

Table 7-2. Test Support Equipment Used

Case 1				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Samsung EVO SD Card	Model:	N/A	S/N:	N/A
Dell Laptop	Model:	Latitude E5570	S/N:	H6TYTF2
Dell AC Adapter	Model:	HA65NM130	S/N:	N/A
Case 2				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung Earphone	Model:	N/A	S/N:	N/A
Case 3				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Samsung Earphone	Model:	N/A	S/N:	N/A
AudioQuest Caebon OTG Adapter	Model:	N/A	S/N:	N/A
Tecknet Mouse	Model:	UM013	S/N:	MGQ398

Table 7-3. Test Support Equipment Used (Radiated)

FCC ID: A3LSMS260DL			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 11 of 25		

Case 1				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Dell Laptop	Model:	Latitude E5570	S/N:	H6TYTF2
Dell AC Adapter	Model:	HA65NM130	S/N:	N/A
CISCO Router	Model:	Linksys E900	S/N:	12310C65201062
Case 2				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Samsung Earphone	Model:	N/A	S/N:	N/A
Case 3				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Samsung Earphone	Model:	N/A	S/N:	N/A
AudioQuest Caebon OTG Adapter	Model:	N/A	S/N:	N/A
Tecknet Mouse	Model:	UM013	S/N:	MGQ398
Case 4				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A
Samsung Earphone	Model:	N/A	S/N:	N/A
Case 5				
Samsung Travel Adapter	Model:	EP-TA200	S/N:	R37K6PAALY1DK3
Samsung USB Cable	Model:	N/A	S/N:	N/A

Table 7-4. Test Support Equipment Used (AC Line Conducted)

Note: See test configuration in each test section for actual configuration. See test setup photographs for actual system test setup.

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 12 of 25	

7.3 Radiated Measurement Data

§15.109

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.105 of the Title 47 CFR must not exceed the limits shown in Table 7-5 per Section 15.109.

Frequency [MHz]	Field Strength Limit [μV/m]
30 – 88	100
88 – 216	150
216 – 960	200
> 960	500

Table 7-5. 3-Meter Radiated Limits (Section 15.109)

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown test setup photos provided.

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 13 of 25

Test Configuration

1. USB Data Communication with PC (from external memory data)
2. Camera (rear) + Charging (w/ TA) + FM (Low Ch.)
3. Camera (front) + USB OTG (w/ USB gender: mouse) + FM (Mid Ch.)


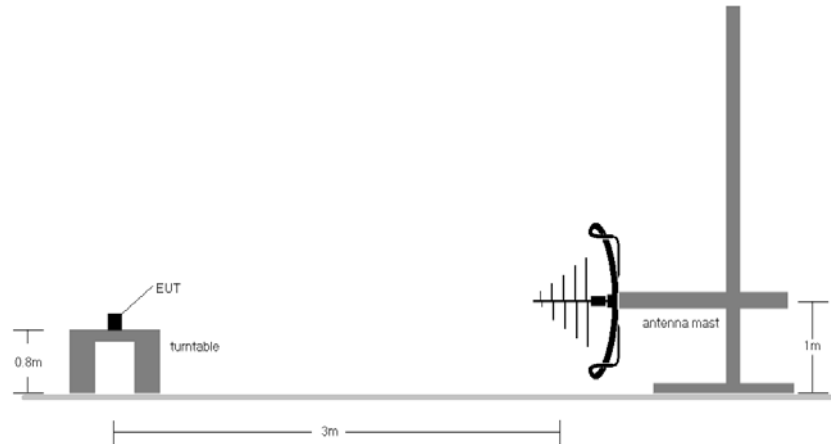


Figure 7-1. Radiated Test Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated emissions were measured from 30MHz –30GHz to ensure that the provisions of 15.33(b)(1) are satisfied with respect to the upper frequency scanning range.
3. The radiated limits for unintentional radiators at a distance of 3 meters are used in the table above, as specified in 15.109(a).
4. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
5. $AFCL\ (dB/m) = Antenna\ Factor\ (dB/m) + Cable\ Loss\ (dB)$
6. $Level\ (dB\mu V/m) = Analyzer\ Reading\ (dBm) + AFCL\ (dB/m) + 107$
7. $Margin\ (dB) = Field\ strength\ (dB\mu V/m) - Limit\ (dB\mu V/m)$
8. Measurements are made using a CISPR quasi-peak detector with a 120kHz resolution bandwidth. Above 1GHz, peak measurements are made using a peak detector with a resolution bandwidth of 1MHz and a video bandwidth of 3MHz and average measurements are made with a RMS detector using a resolution bandwidth of 1MHz and a video bandwidth of 3MHz.
9. Calibrated linearly polarized broadband and horn antennas were used for measurements below and above 1GHz, respectively. For measurements made below 1GHz, the results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antennas was found to be less than 2:1.
10. Calibrated low-loss microwaves cables and broadband amplifiers are used.

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 14 of 25

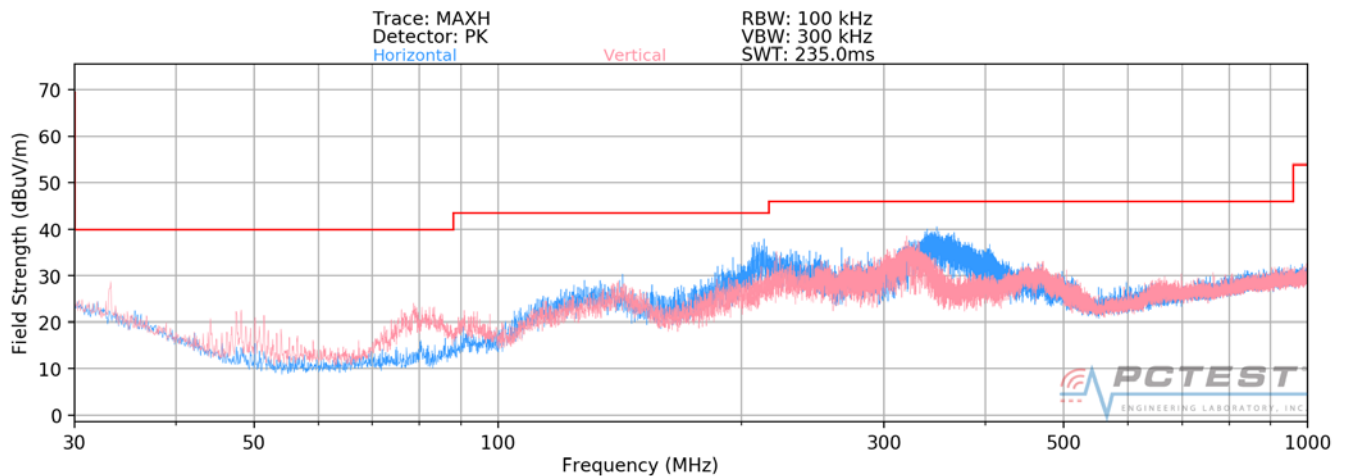

Plot 7-1. Radiated Spurious Plot below 1GHz (Configuration 1)

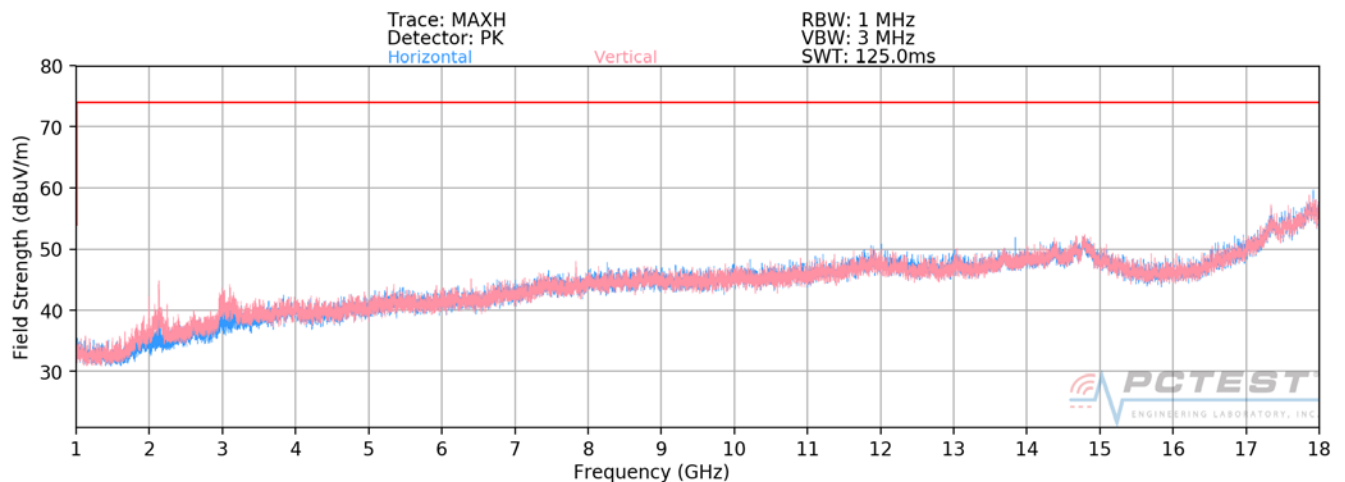


Plot 7-2. Radiated Spurious Plot above 1GHz (Configuration 1)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
33.00	Quasi-Peak	V	133	80	-78.19	-10.27	18.54	40.00	-21.46
47.58	Quasi-Peak	V	119	246	-77.96	-20.35	8.69	40.00	-31.31
82.67	Quasi-Peak	V	110	116	-67.69	-21.60	17.71	40.00	-22.29
144.68	Quasi-Peak	H	207	228	-66.41	-16.43	24.16	43.52	-19.37
210.00	Quasi-Peak	V	145	173	-65.30	-18.11	23.59	43.52	-19.93
346.68	Quasi-Peak	H	121	236	-57.86	-13.41	35.73	46.02	-10.29

Table 7-6. Radiated Measurements at 3-meters (Configuration 1)

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)					SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset					Page 15 of 25	

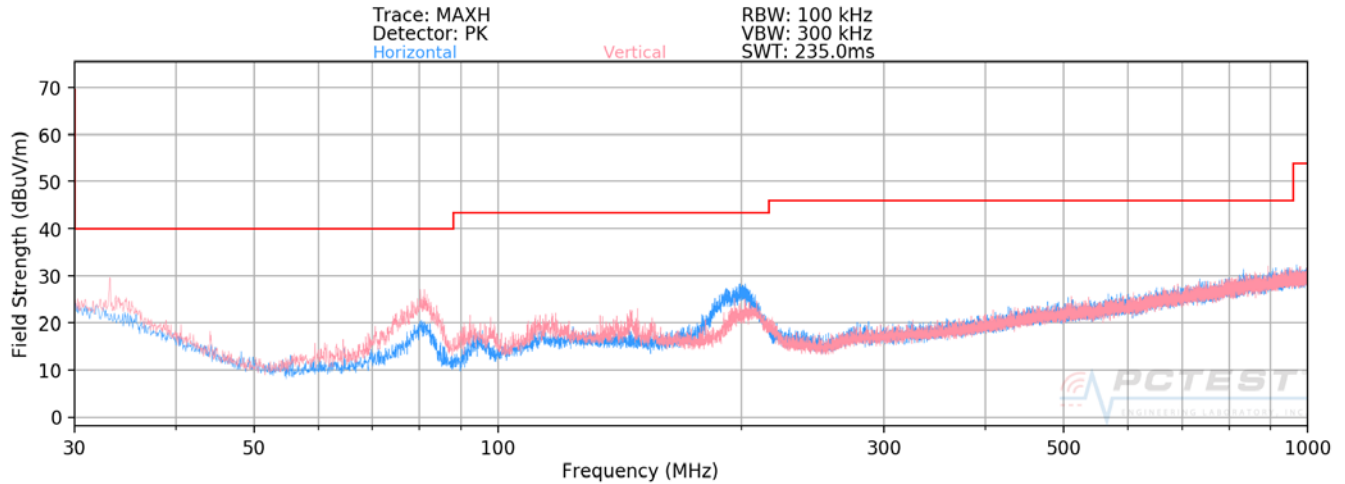

Plot 7-3. Radiated Spurious Plot below 1GHz (Configuration 2)

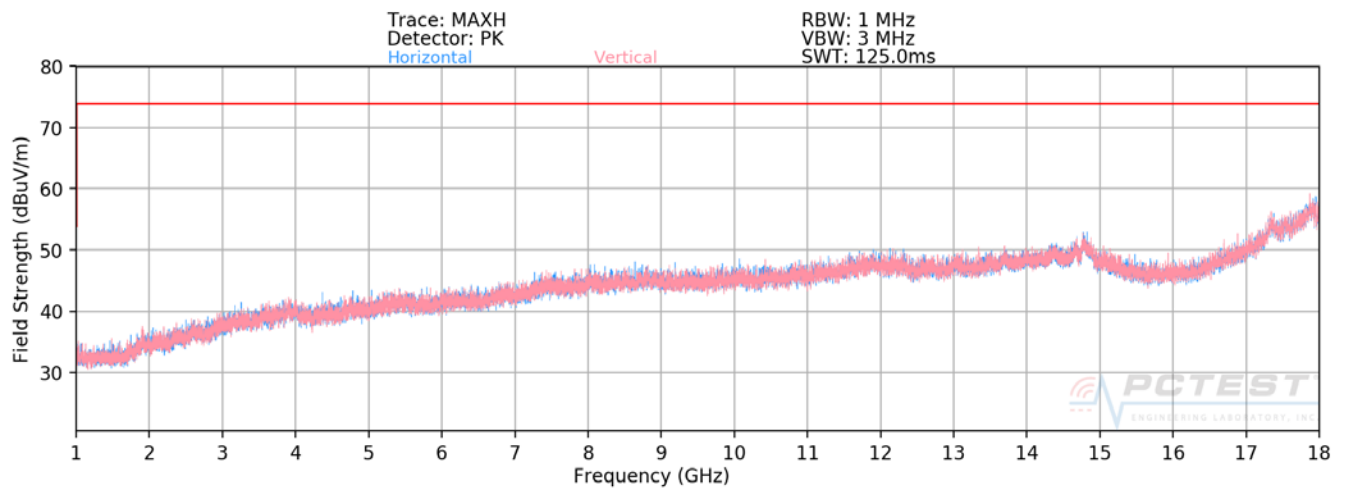


Plot 7-4. Radiated Spurious Plot above 1GHz (Configuration 2)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
38.75	Quasi-Peak	V	118	115	-79.02	-11.10	16.88	40.00	-23.12
81.00	Quasi-Peak	V	117	144	-69.52	-21.32	16.16	40.00	-23.84
94.14	Quasi-Peak	V	114	129	-72.53	-20.69	13.78	43.52	-29.74
119.96	Quasi-Peak	V	360	91	-77.07	-15.57	14.36	43.52	-29.17
149.66	Quasi-Peak	V	389	223	-75.09	-16.43	15.48	43.52	-28.05
204.88	Quasi-Peak	V	127	252	-74.17	-16.16	16.67	43.52	-26.86

Table 7-7. Radiated Measurements at 3-meters (Configuration 2)

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)					SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset					Page 16 of 25	

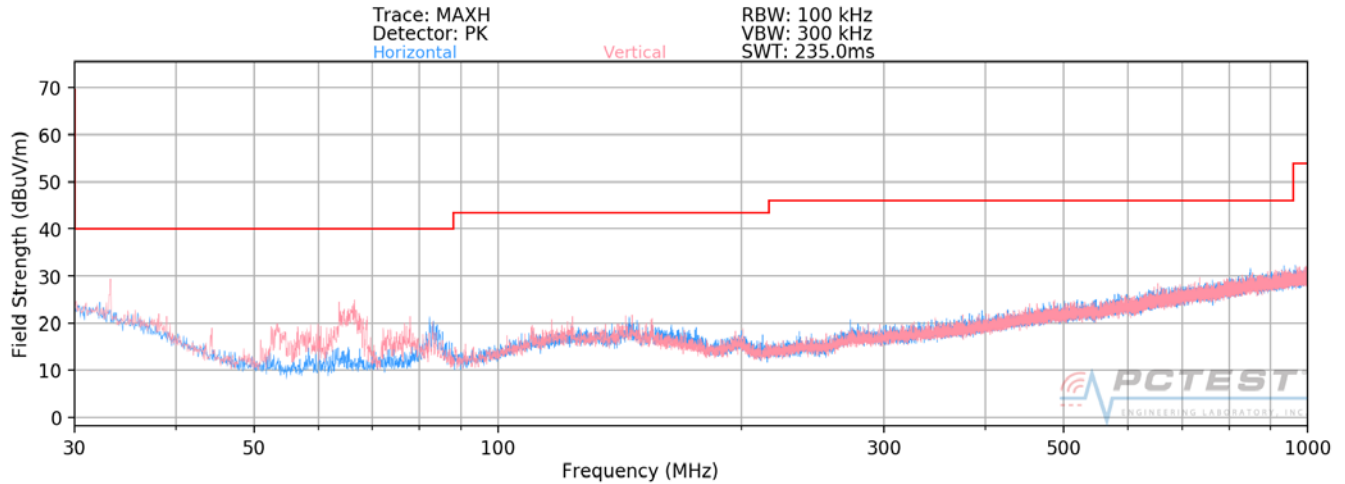

Plot 7-5. Radiated Spurious Plot below 1GHz (Configuration 3)

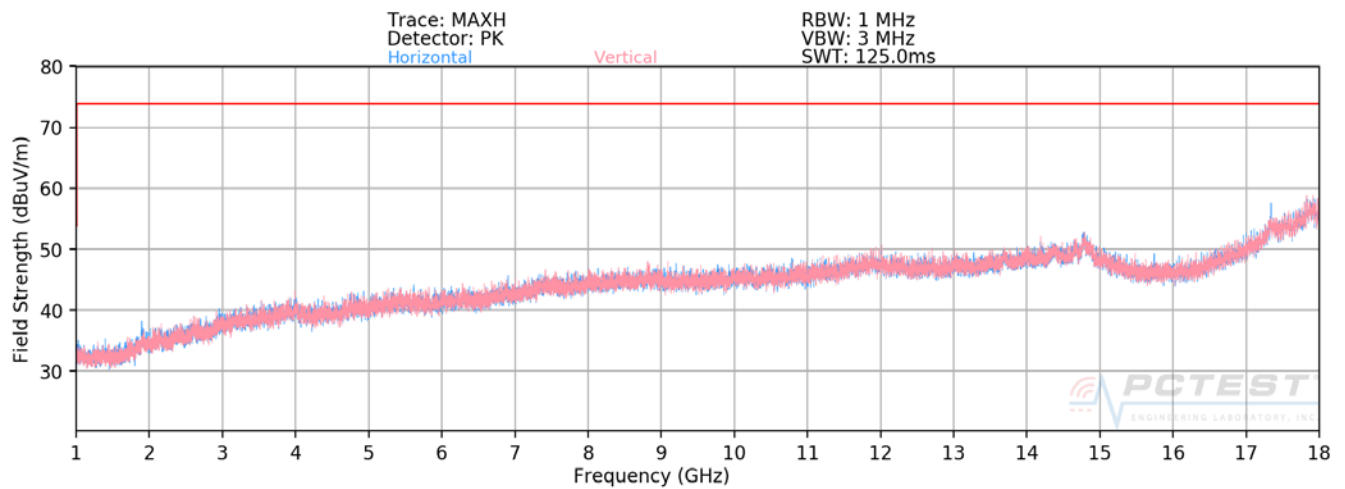

Plot 7-6. Radiated Spurious Plot above 1GHz (Configuration 3)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
33.14	Quasi-Peak	V	110	106	-79.34	-10.27	17.39	40.00	-22.61
44.29	Quasi-Peak	V	114	102	-75.95	-20.35	10.70	40.00	-29.30
53.72	Quasi-Peak	V	260	127	-75.51	-21.60	9.89	40.00	-30.11
65.22	Quasi-Peak	V	120	180	-77.29	-16.43	13.28	40.00	-26.72
78.00	Quasi-Peak	V	262	153	-73.21	-18.11	15.68	40.00	-24.32
83.00	Quasi-Peak	H	235	221	-70.85	-13.41	22.74	40.00	-17.26

Table 7-8. Radiated Measurements at 3-meters (Configuration 3)

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)				SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset				Page 17 of 25	

7.4 Line Conducted Measurement Data

§15.107

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.107.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-9. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset	Page 18 of 25	

Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.

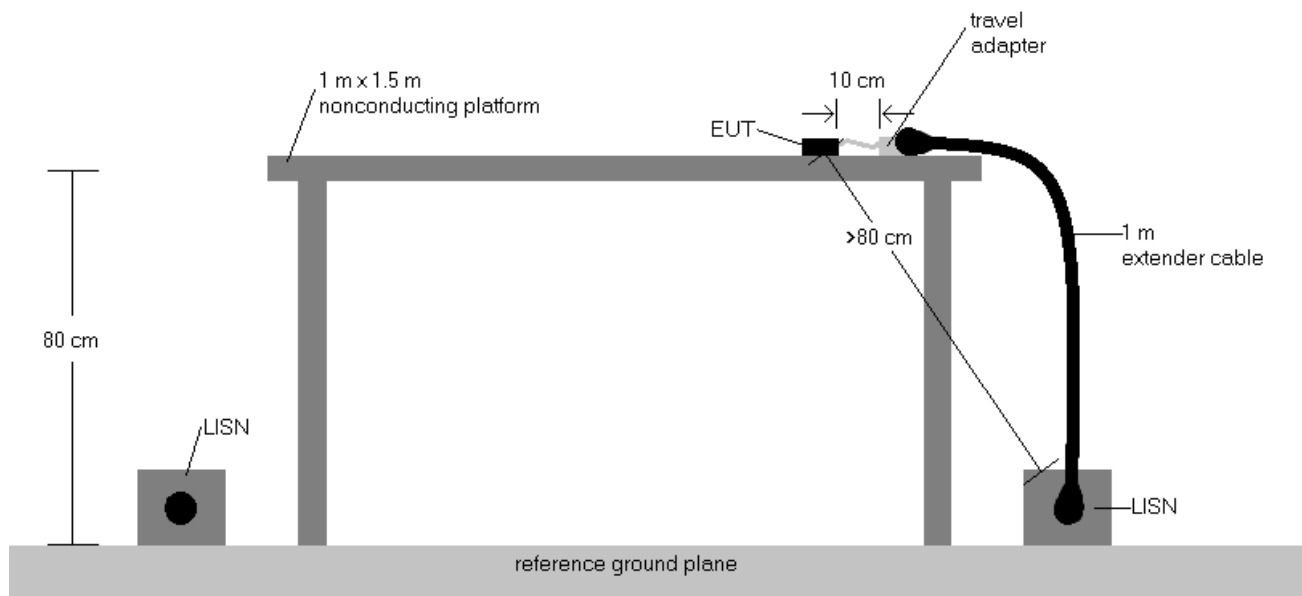


Figure 7-2. Test Instrument & Measurement Setup


EUT Configuration

1. USB Data Communication with PC (from external memory data)
2. Camera (rear) + Charging (w/ TA) + FM (Low Ch.) + License Rx mode (Worst Band Mid Ch)
3. Camera (front) + Charging (w/ TA) + FM (Mid Ch.)
4. Charging (w/ TA) + FM (High Ch.)
5. Video + Audio playback from Internal memory data + Charging (w/ TA)


Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Reading (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Limit (dBμV) – QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 19 of 25

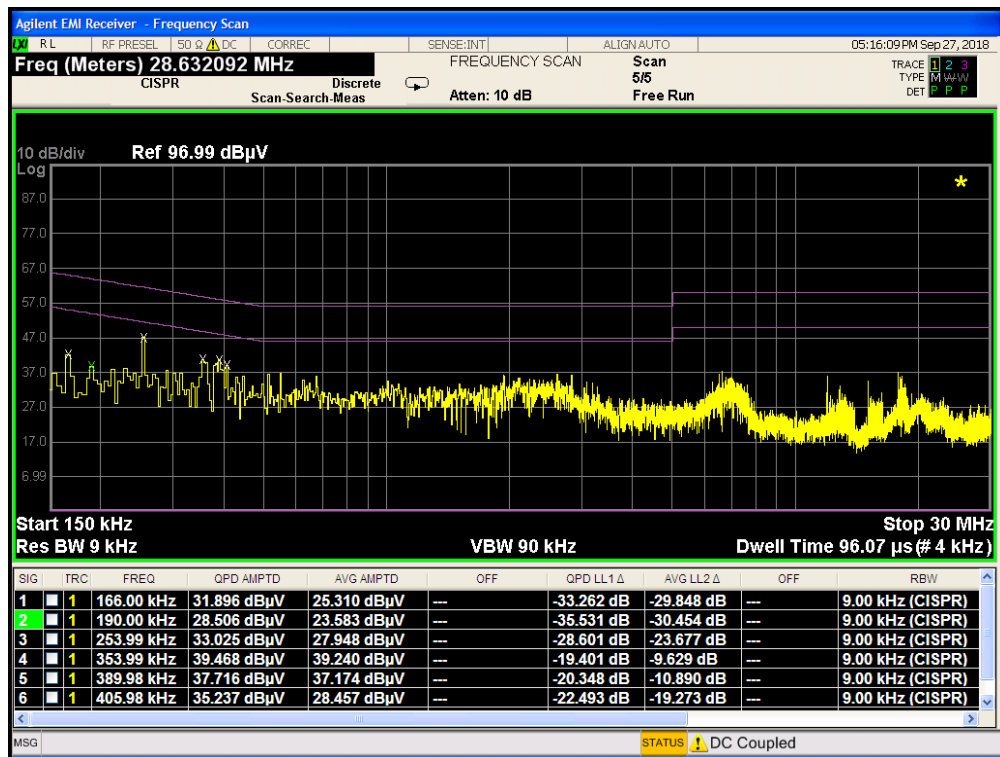


Plot 7-7. Line Conducted Plot (L1- Configuration 1)

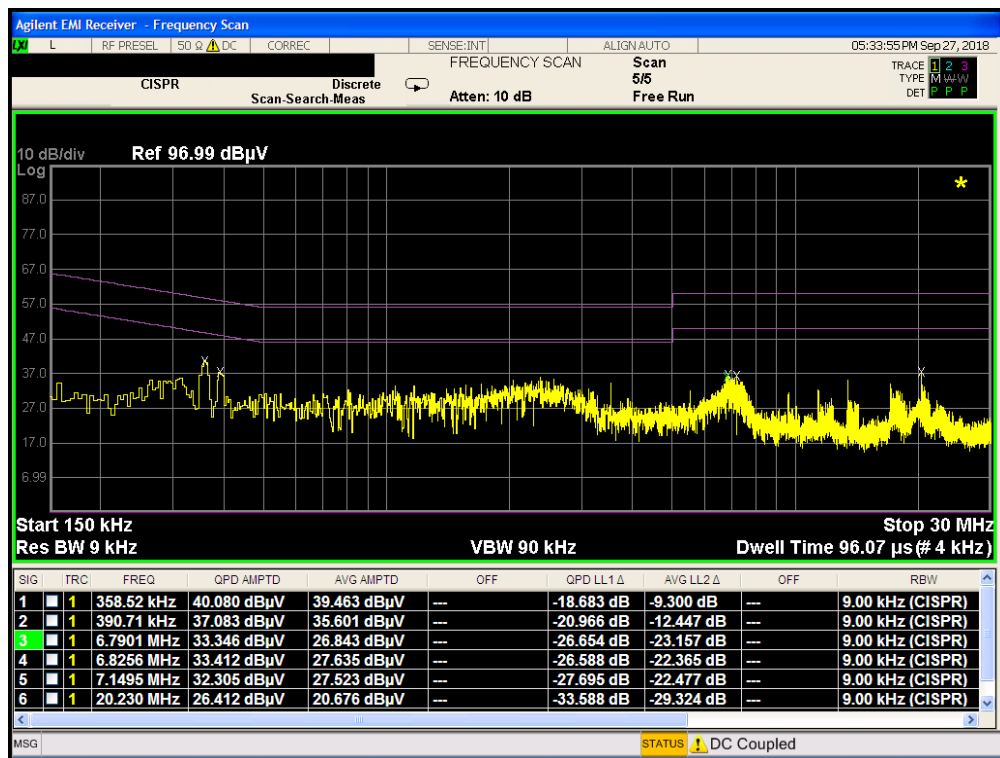


Plot 7-8. Line Conducted Plot (N- Configuration 1)

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 20 of 25

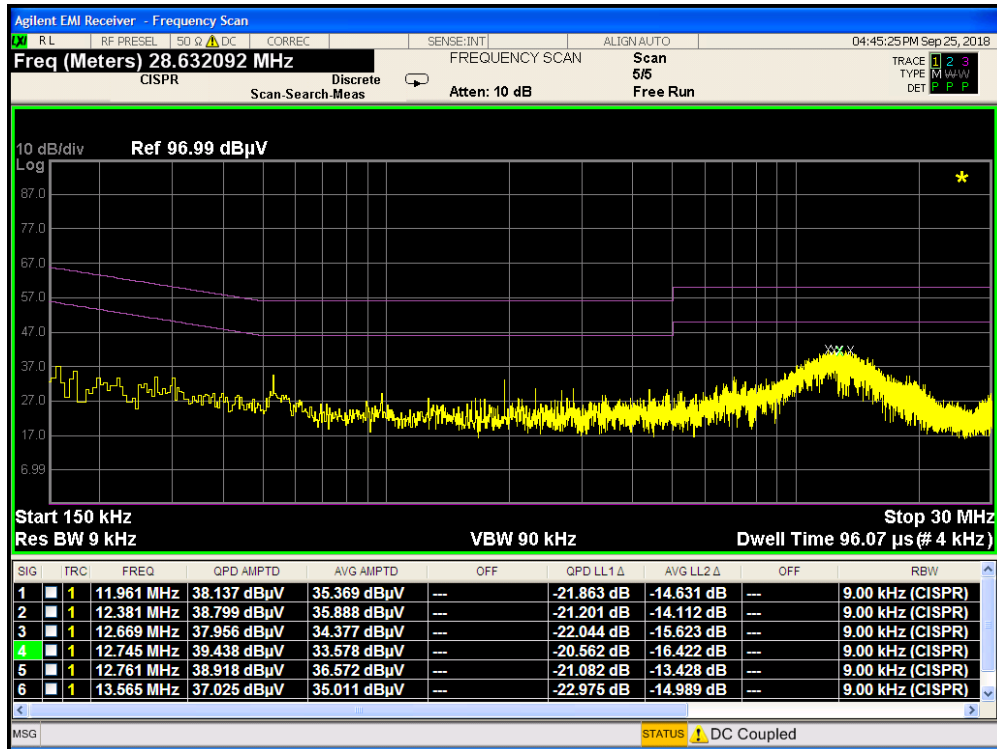


Plot 7-9. Line Conducted Plot (L1 - Configuration 2)

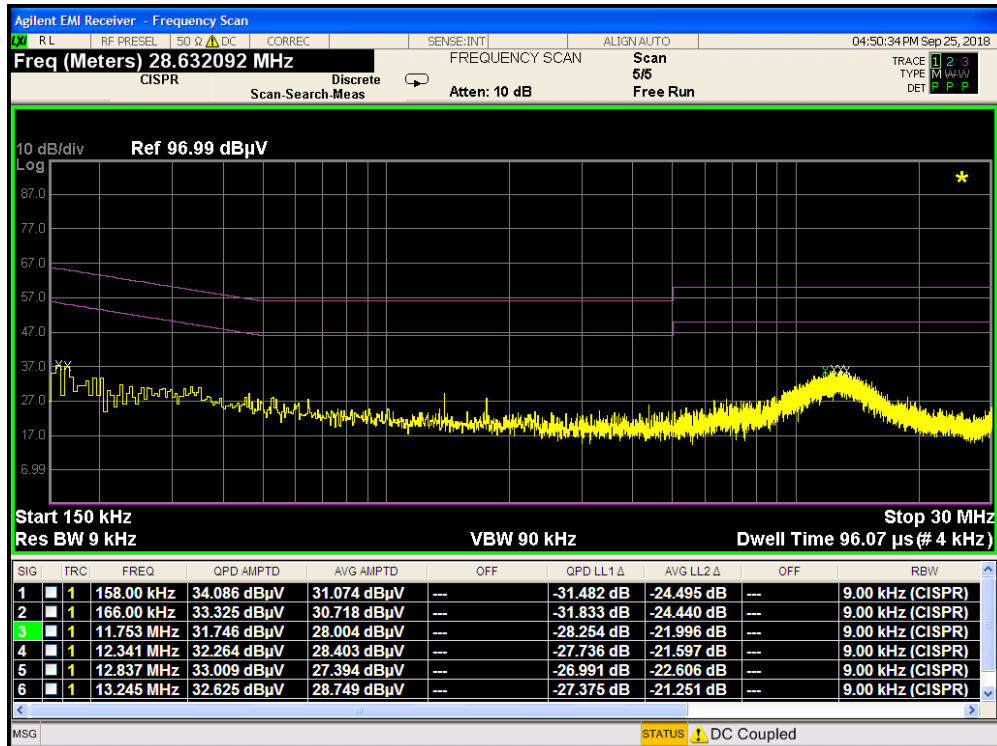


Plot 7-10. Line Conducted Plot (N - Configuration 2)

FCC ID: A3LSMS260DL			MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset				Page 21 of 25

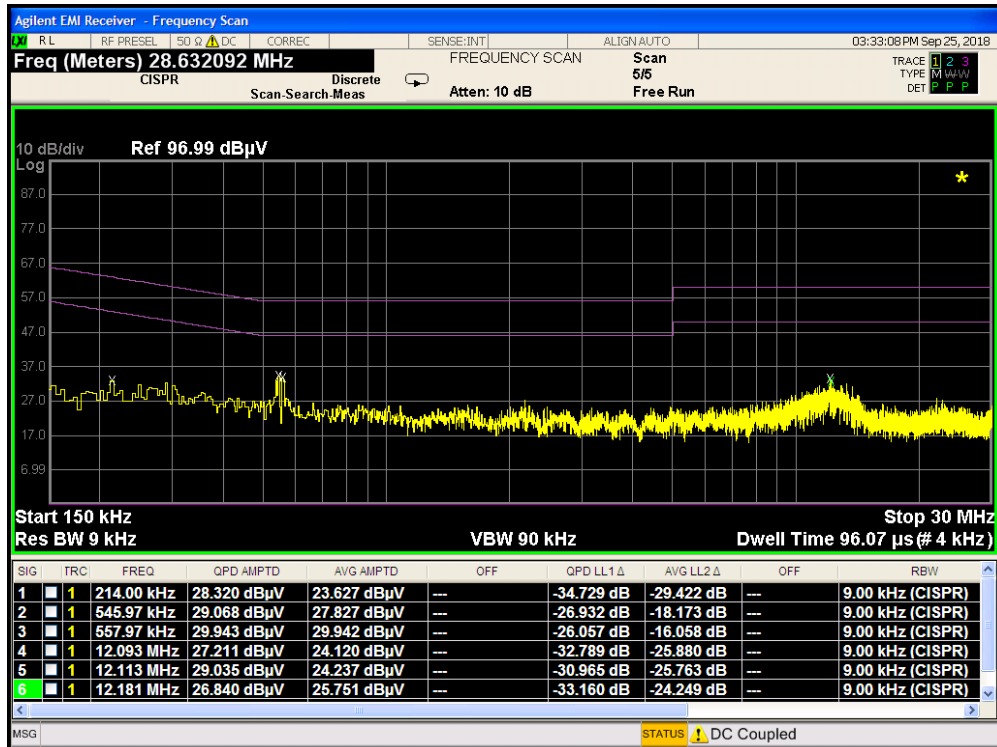


Plot 7-11. Line Conducted Plot (L1 - Configuration 3)

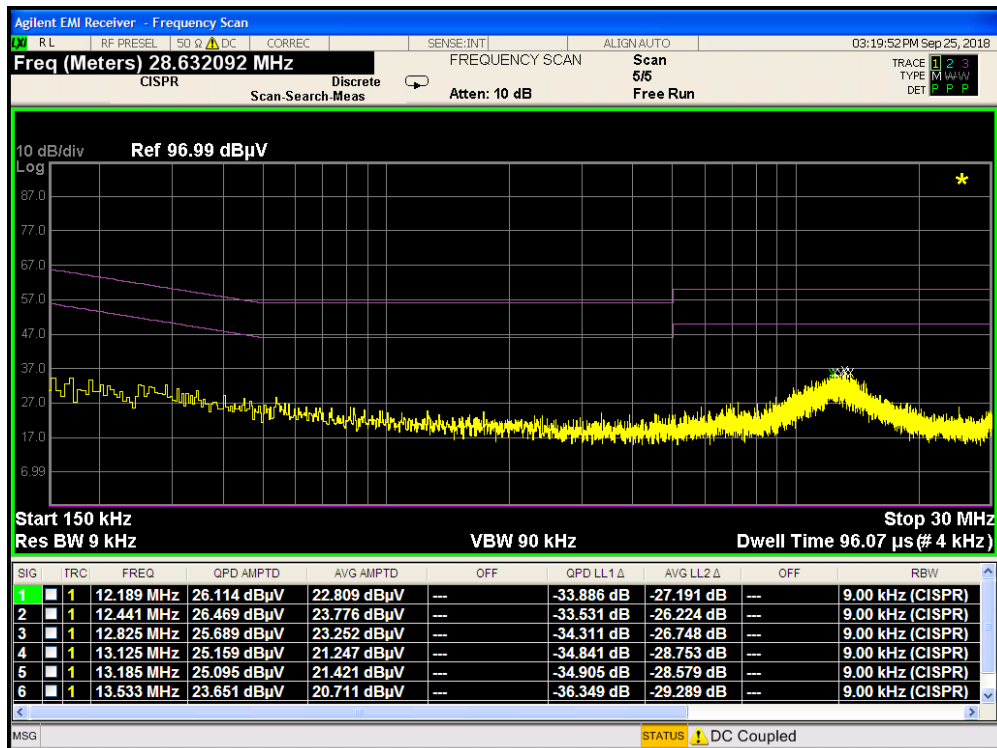


Plot 7-12. Line Conducted Plot (N - Configuration 3)

FCC ID: A3LSMS260DL			MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset				Page 22 of 25

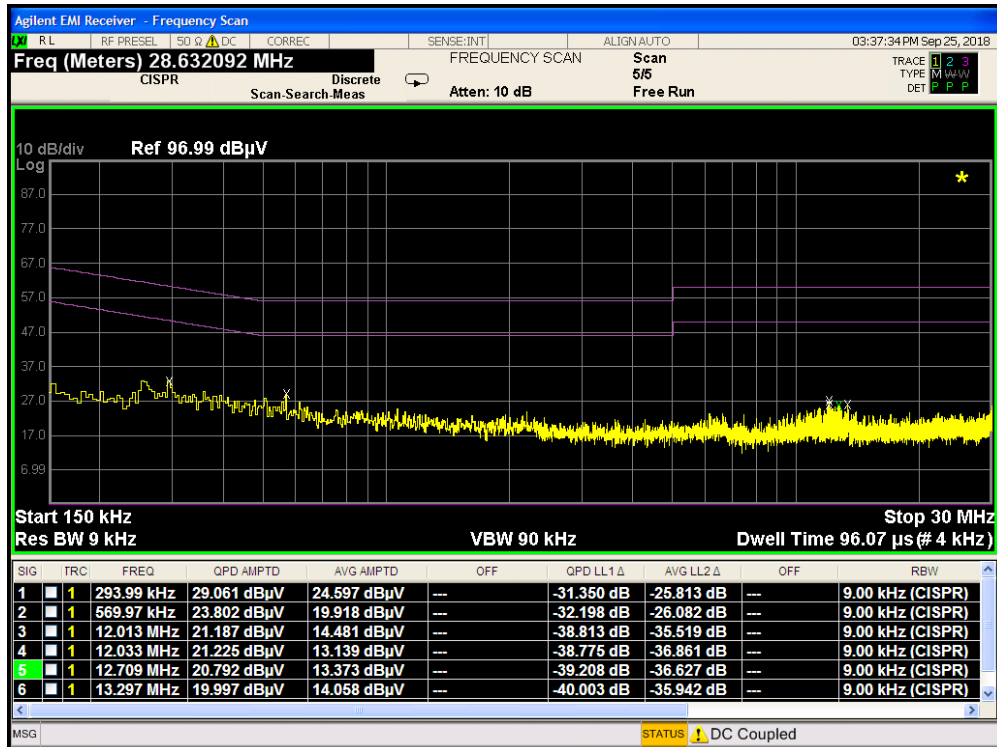


Plot 7-13. Line Conducted Plot (L1 - Configuration 4)

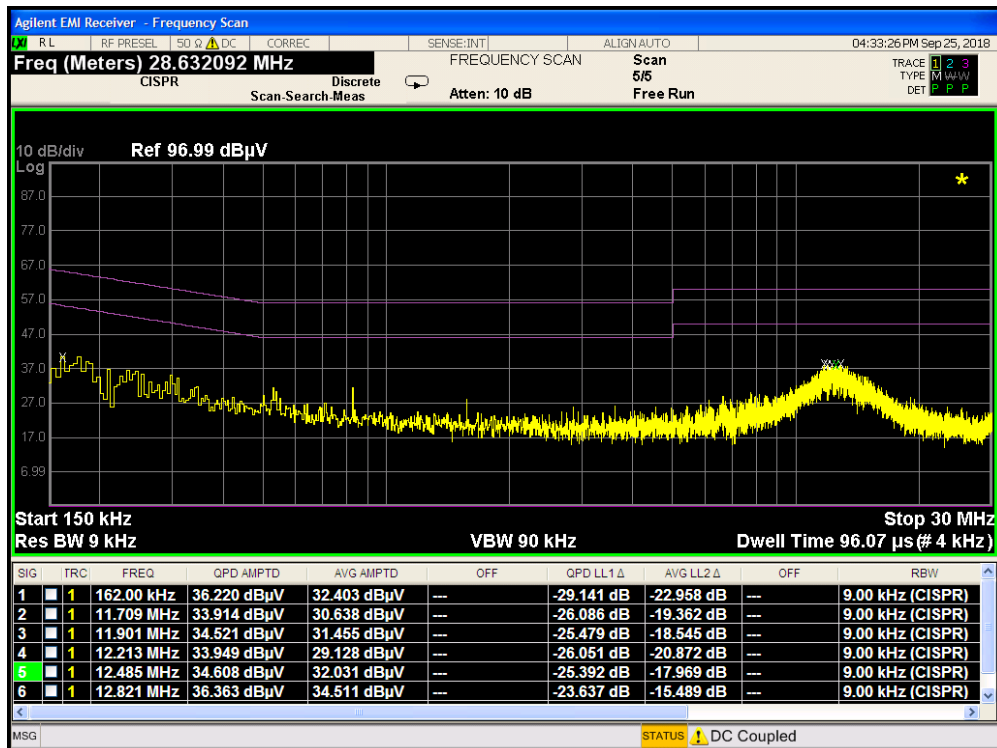


Plot 7-14. Line Conducted Plot (N - Configuration 4)

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset			Page 23 of 25

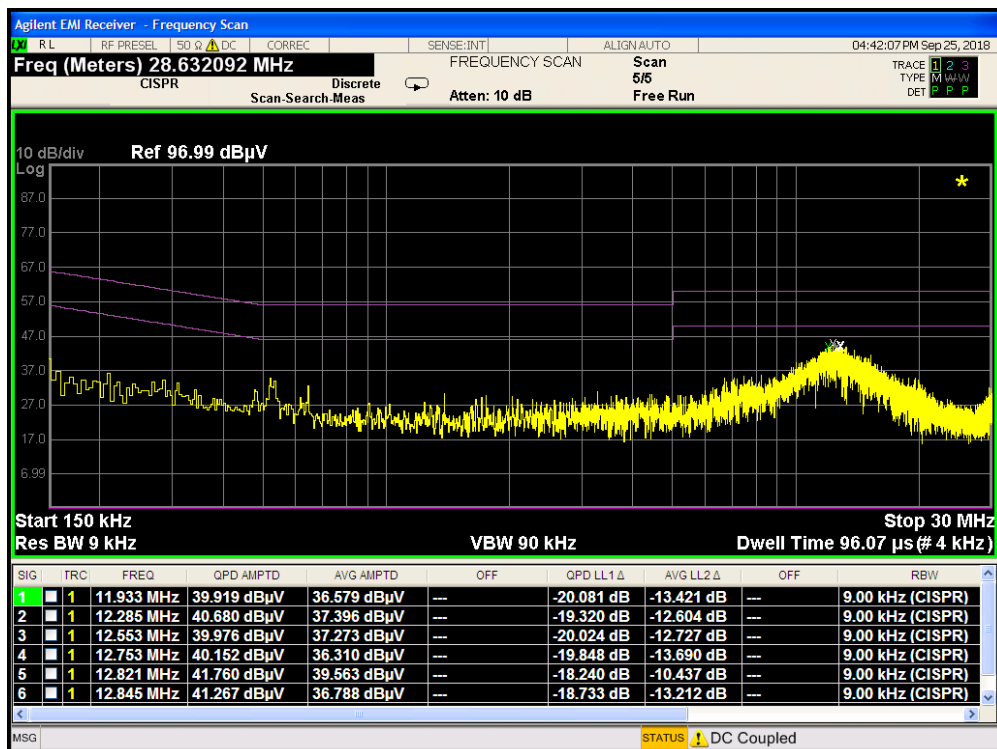

Plot 7-15. Line Conducted Plot (L1 - Configuration 5)

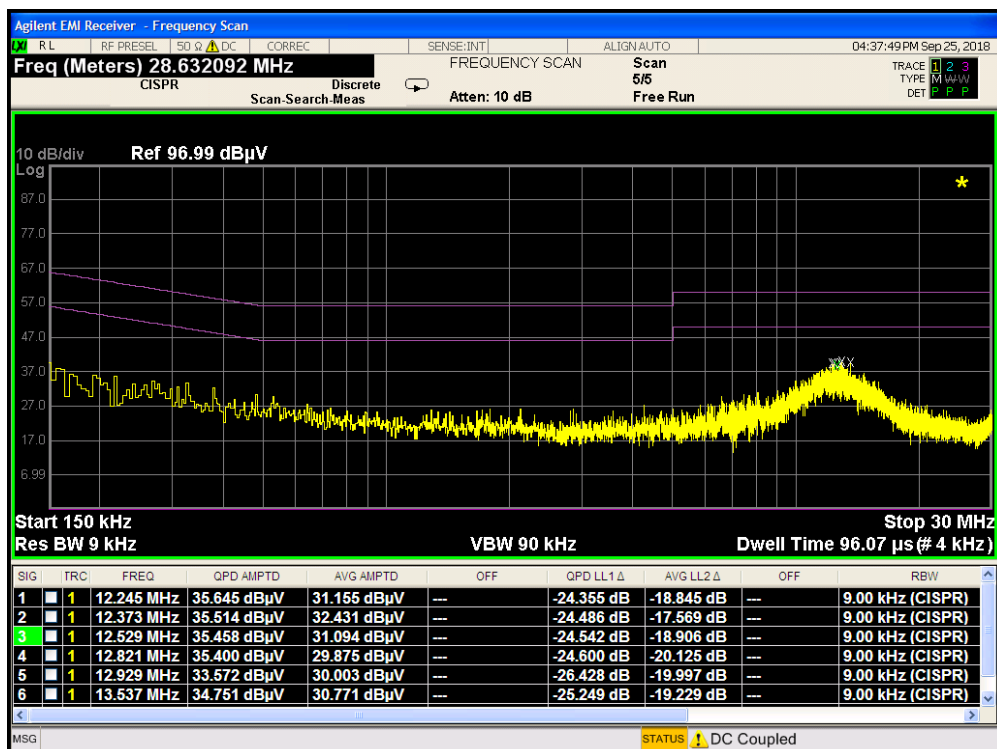

Plot 7-16. Line Conducted Plot (N - Configuration 5)

FCC ID: A3LSMS260DL	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 24 of 25

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS260DL** has been tested to comply with the requirements specified in §15.107 and §15.109 of the FCC rules.

FCC ID: A3LSMS260DL		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1811190204-07.A3L	Test Dates: 9/21 - 10/26/2018	EUT Type: Portable Handset		Page 25 of 25