



## PART 22 MEASUREMENT REPORT

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea


**Date of Testing:**  
12/09/2021 - 12/31/2021  
**Test Report Issue Date:**  
01/07/2022  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M2112090153-02.A3L

<b>FCC ID:</b>	<b>A3LSMS901JPN</b>
<b>Applicant Name:</b>	<b>Samsung Electronics Co., Ltd.</b>



<b>Application Type:</b>	Certification
<b>Model:</b>	SC-51C
<b>Additional Model(s):</b>	SCG13
<b>EUT Type:</b>	Portable Handset
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part:</b>	22
<b>Test Procedure(s):</b>	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




  
\_\_\_\_\_  
Randy Ortanez  
President




<b>FCC ID:</b> A3LSMS901JPN	 <b>PART 22 MEASUREMENT REPORT</b> 	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset
		Page 1 of 56


# TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	10
7.1	Summary .....	10
7.2	Occupied Bandwidth .....	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	18
7.4	Band Edge Emissions at Antenna Terminal .....	34
7.5	Radiated Power (ERP) .....	41
7.6	Radiated Spurious Emissions Measurements .....	44
7.7	Frequency Stability / Temperature Variation .....	52
8.0	CONCLUSION.....	56

<b>FCC ID:</b> A3LSMS901JPN	 <b>PCTEST</b> <small>Proud to be part of  element</small>	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 2 of 56	



## PART 22 MEASUREMENT REPORT





Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
LTE Band 5	10 MHz	QPSK	829.0 - 844.0	0.115	20.61	0.189	22.76	9M03G7D
		16QAM	829.0 - 844.0	0.093	19.67	0.152	21.82	9M01W7D
	5 MHz	QPSK	826.5 - 846.5	0.115	20.61	0.189	22.76	4M52G7D
		16QAM	826.5 - 846.5	0.097	19.86	0.159	22.01	4M54W7D
	3 MHz	QPSK	825.5 - 847.5	0.117	20.68	0.192	22.83	2M72G7D
		16QAM	825.5 - 847.5	0.099	19.96	0.162	22.11	2M72W7D
1.4 MHz	QPSK	824.7 - 848.3	0.116	20.66	0.191	22.81	1M11G7D	
	16QAM	824.7 - 848.3	0.098	19.89	0.160	22.04	1M11W7D	

EUT Overview (LTE)

Mode	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	824.2 - 848.8	0.489	26.89	0.802	29.04	245KGXW
EDGE	8-PSK	824.2 - 848.8	0.136	21.32	0.222	23.47	231KG7W
WCDMA	Spread Spectrum	826.4 - 846.6	0.108	20.34	0.177	22.49	4M16F9W

EUT Overview (2G/3G)

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 3 of 56

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMS901JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset		Page 4 of 56

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS901JPN**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

**Test Device Serial No.:** 0018M, 0004M, 0007M, 0012M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer



### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 5 of 56	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

<b>FCC ID:</b> A3LSMS901JPN	 <small>Proud to be part of element</small>	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 6 of 56	

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS901JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 7 of 56	

## 5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
-	ETS	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	ETS
-	LTx1	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx2
Agilent	E5515C	Wireless Communications Test Set	N/A			GB45360985
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Agilent	N9030A	50GHz PXA Signal Analyzer	1/20/2021	Annual	1/20/2022	US51350301
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201525694
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	8/27/2020	Annual	8/27/2022	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	00125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	00114451
Keysight Technologies	N9030A	PXA Signal Analyzer	9/2/2020	Annual	12/20/2021	MY55410501
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	2/1/2022	MY51210133
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	1/21/2021	Annual	1/21/2022	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	2/10/2021	Annual	2/10/2022	103187

Table 5-1. Test Equipment

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 8 of 56	



## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

#### **Emission Designator = 250KGXW**

GSM BW = 250 kHz  
 G = Phase Modulation  
 X = Cases not otherwise covered  
 W = Combination (Audio/Data)

### EDGE Emission Designator

#### **Emission Designator = 250KG7W**

EDGE BW = 250 kHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 W = Combination (Audio/Data)

### WCDMA Emission Designator

#### **Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data)

### QPSK Modulation

#### **Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

### QAM Modulation



#### **Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 9 of 56

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS901JPN  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
<b>CONDUCTED</b>	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.6
<b>RADIATED</b>	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 10 of 56

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

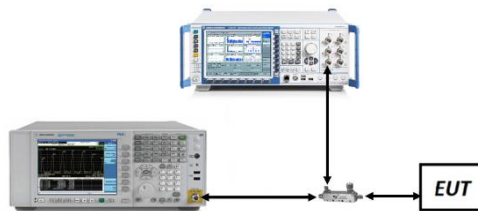


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 11 of 56

## LTE Band 5

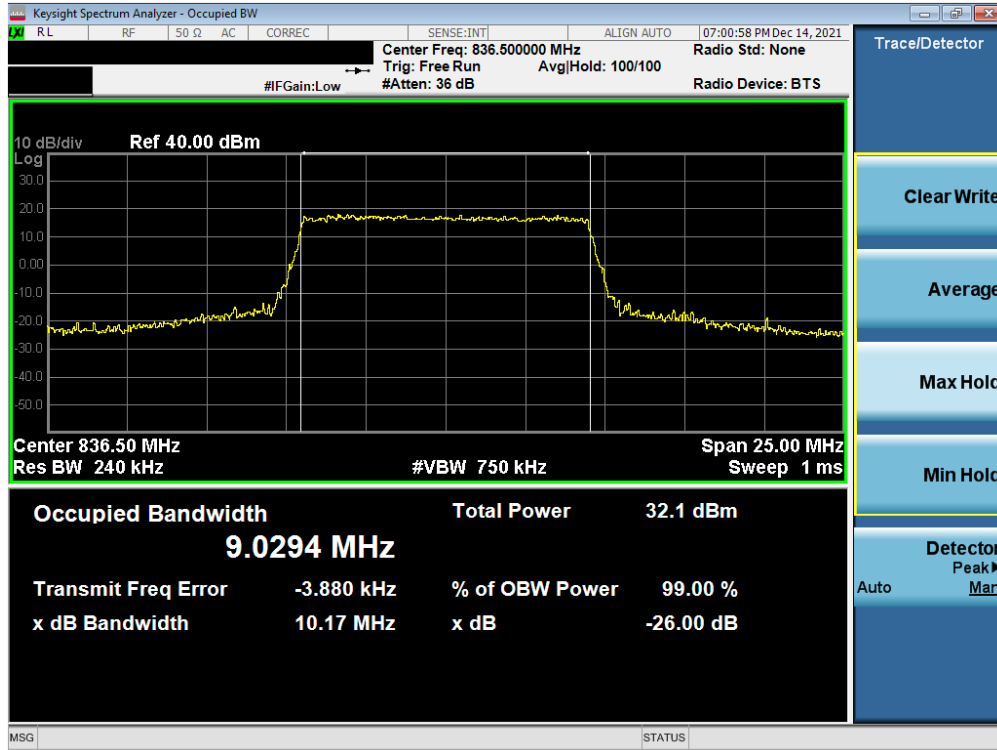


Plot 7-1. Occupied Bandwidth Plot (LTE Band 5 - 10MHz QPSK - Full RB)

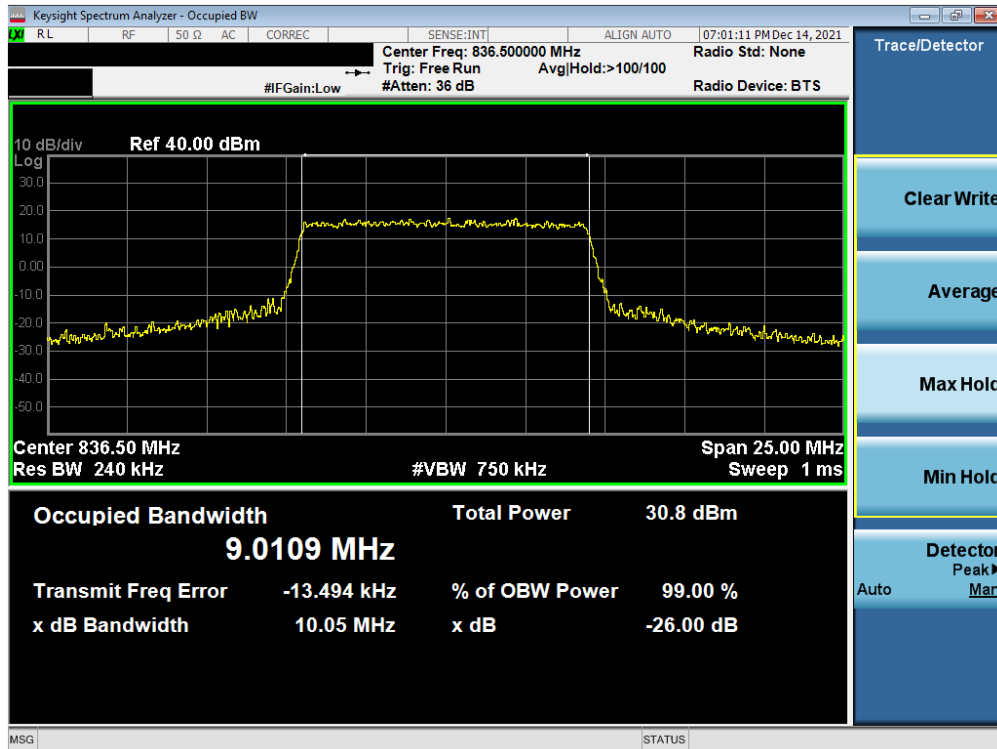


Plot 7-2. Occupied Bandwidth Plot (LTE Band 5 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 12 of 56

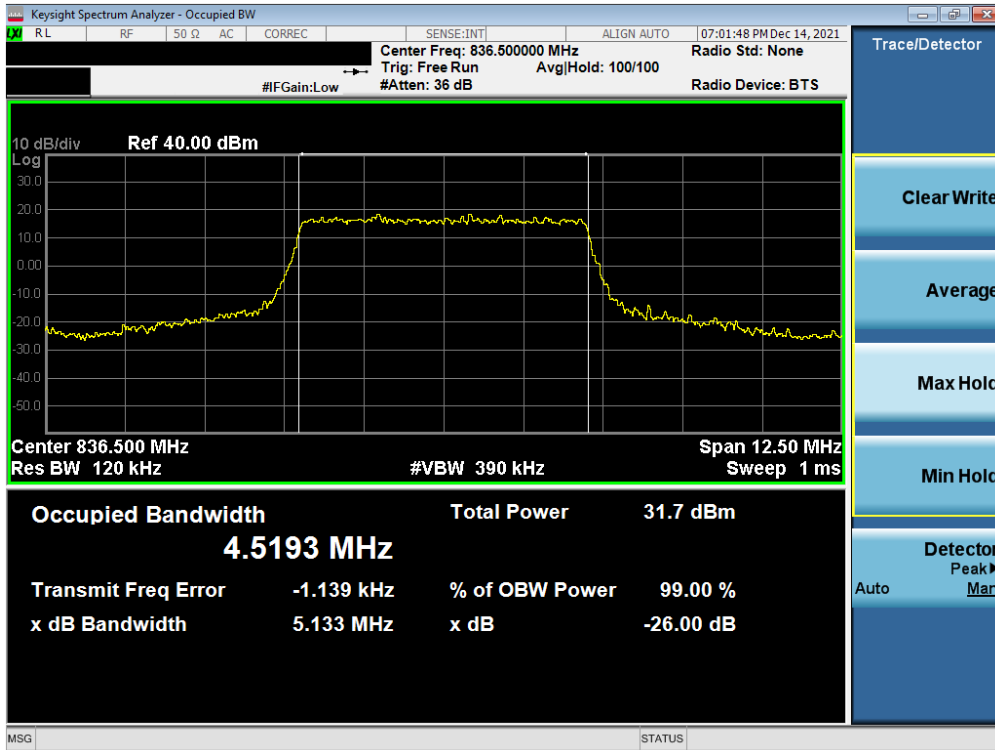


Plot 7-3. Occupied Bandwidth Plot (LTE Band 5 - 5MHz QPSK - Full RB)

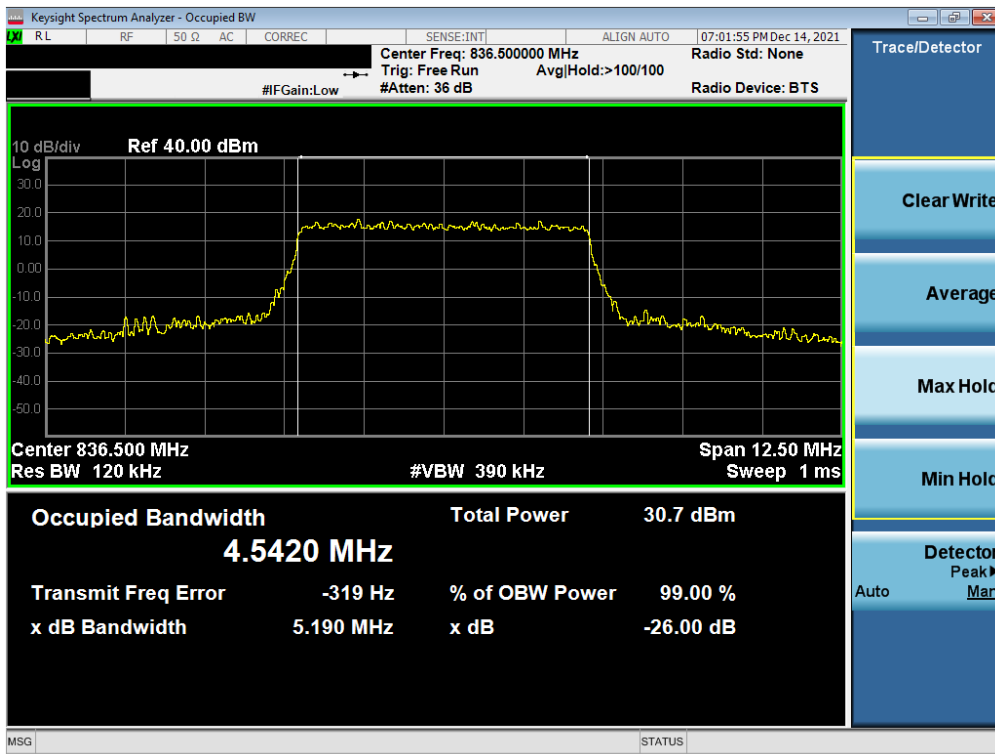

Plot 7-4. Occupied Bandwidth Plot (LTE Band 5 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 13 of 56

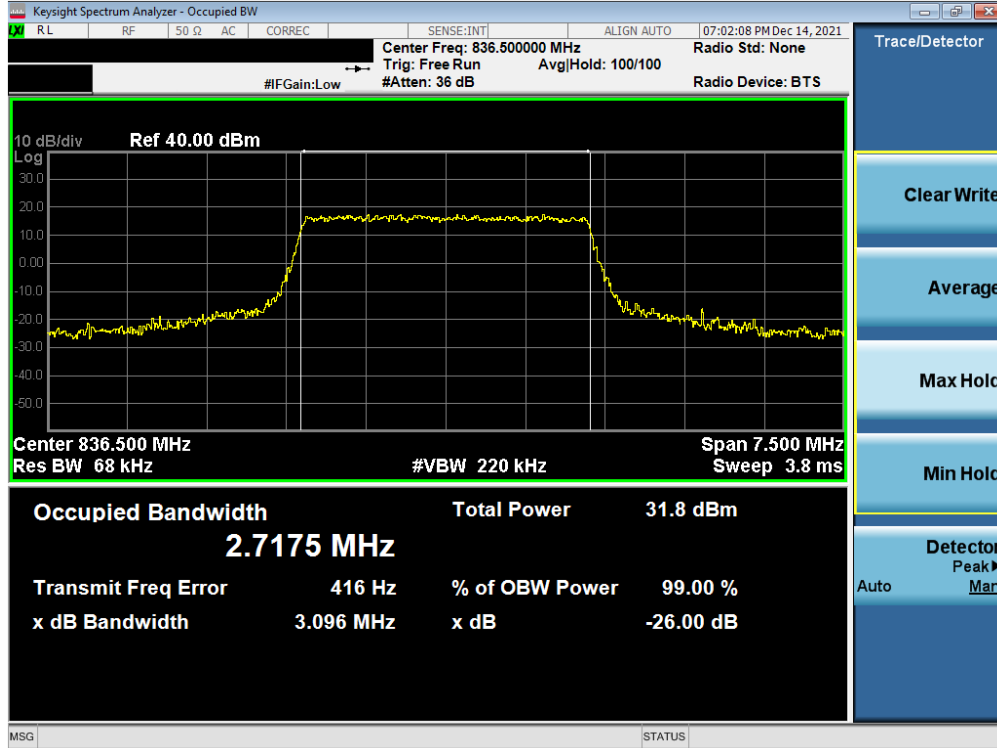


Plot 7-5. Occupied Bandwidth Plot (LTE Band 5 - 3MHz QPSK - Full RB)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 5 - 3MHz 16-QAM - Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 14 of 56

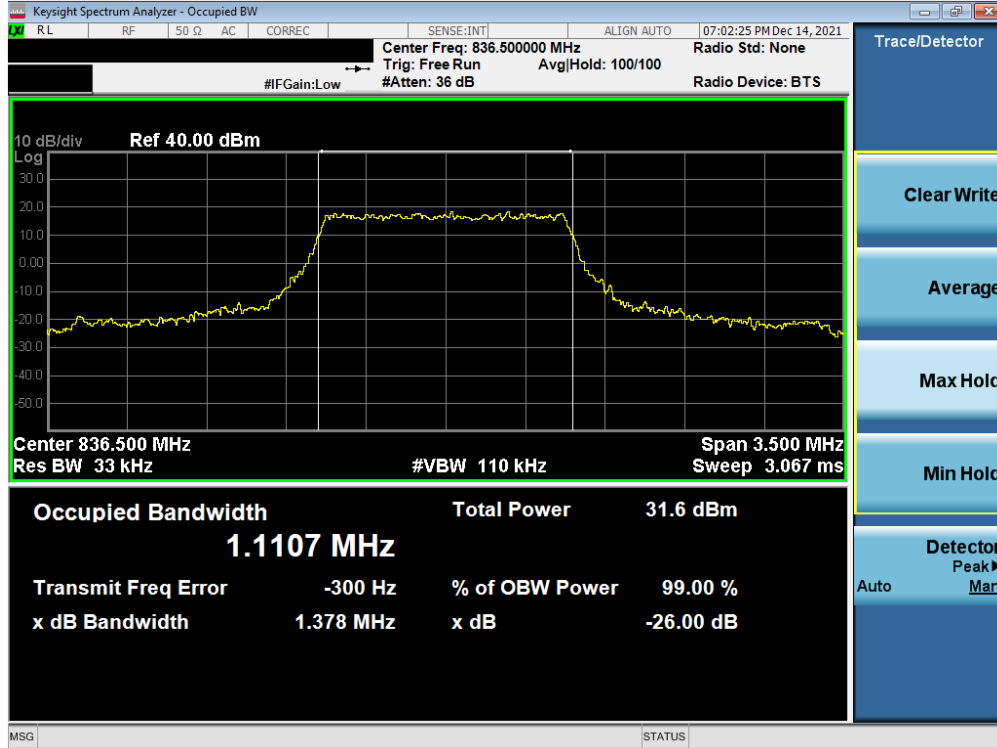


Plot 7-7. Occupied Bandwidth Plot (LTE Band 5 - 1.4MHz QPSK - Full RB)

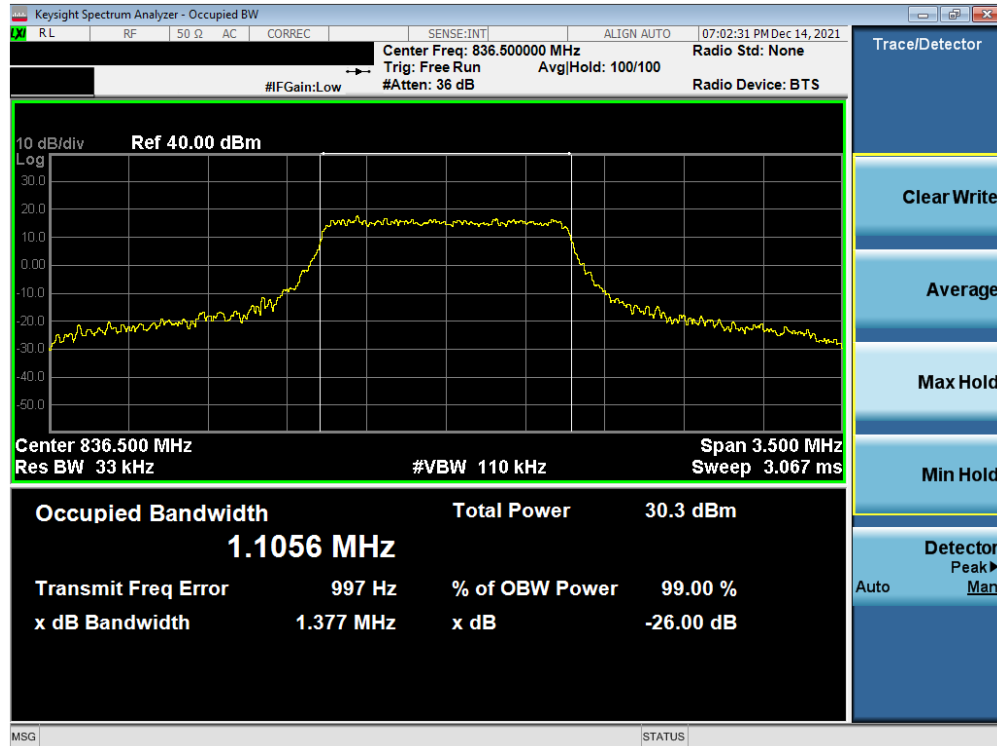


Plot 7-8. Occupied Bandwidth Plot (LTE Band 5 - 1.4MHz 16-QAM - Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 15 of 56

## GPRS Cell

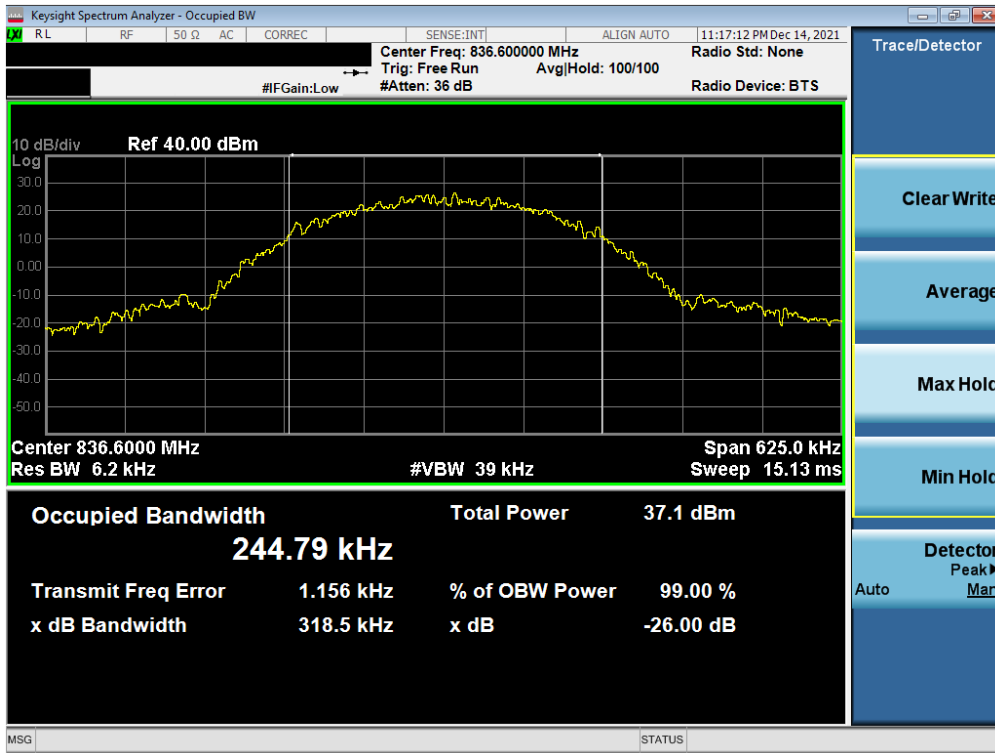

Plot 7-9. Occupied Bandwidth Plot (GPRS, Ch. 190)

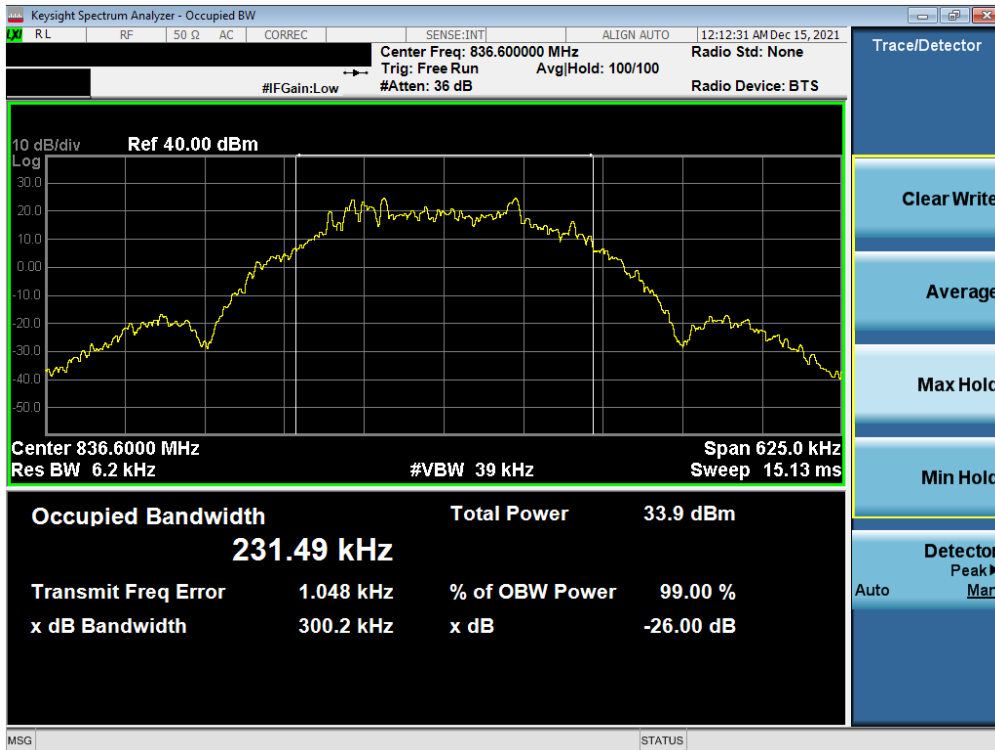


Plot 7-10. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 16 of 56



# WCDMA Cell

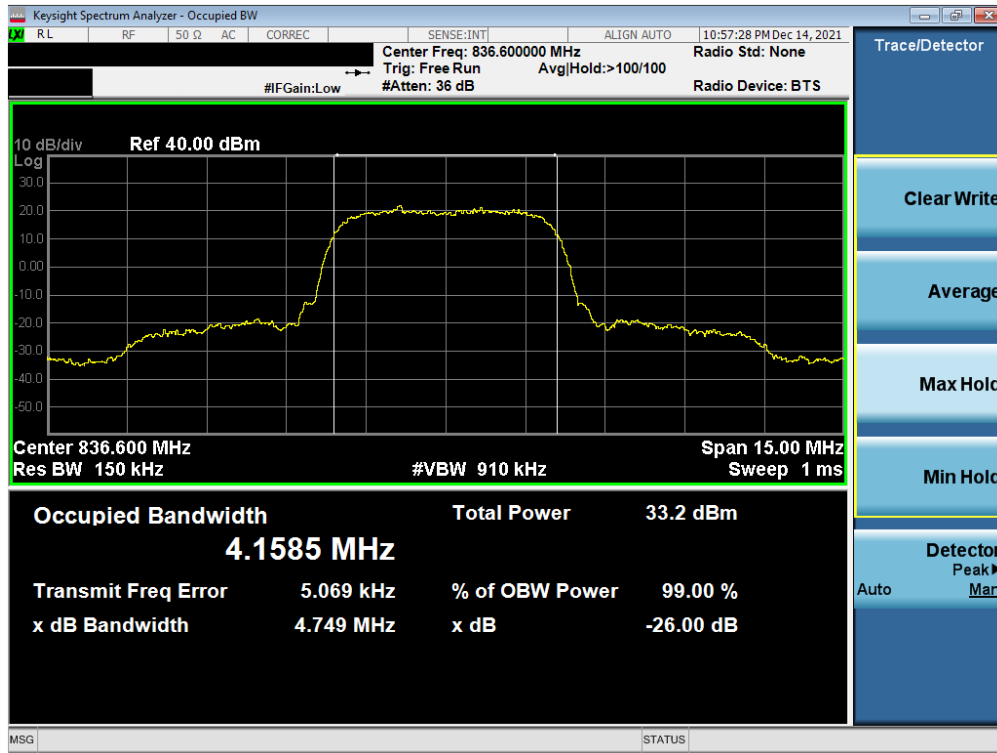

Plot 7-11. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 17 of 56

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

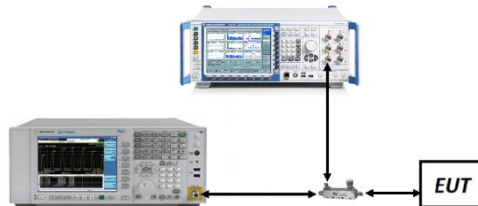


**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


1. Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 18 of 56

## LTE Band 5

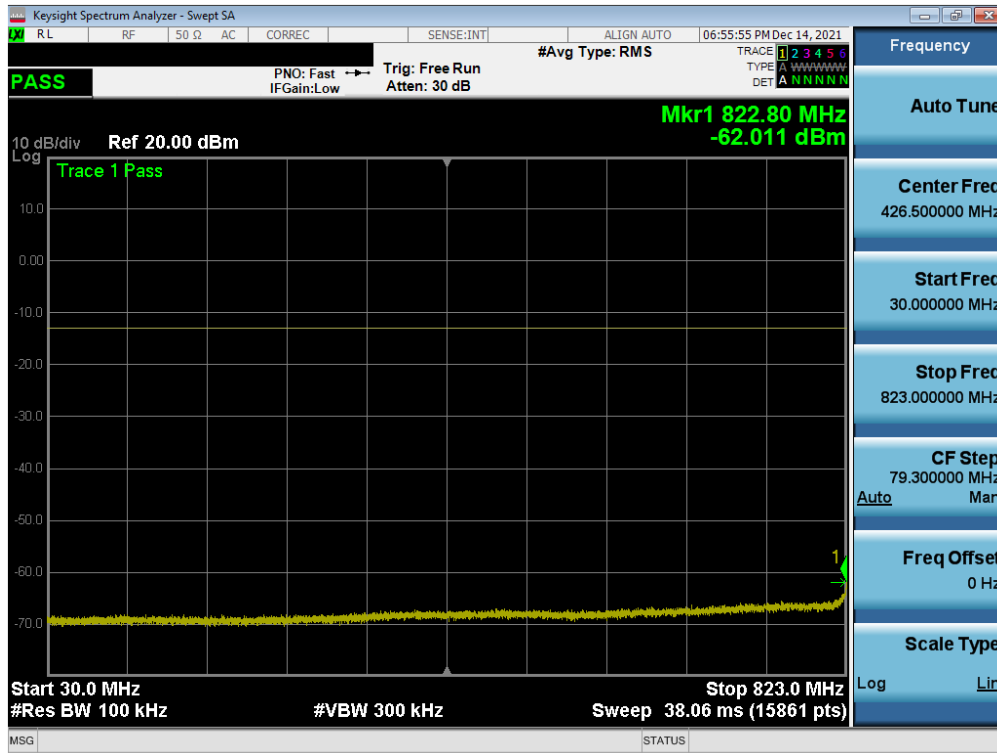


Plot 7-12. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Low Channel)

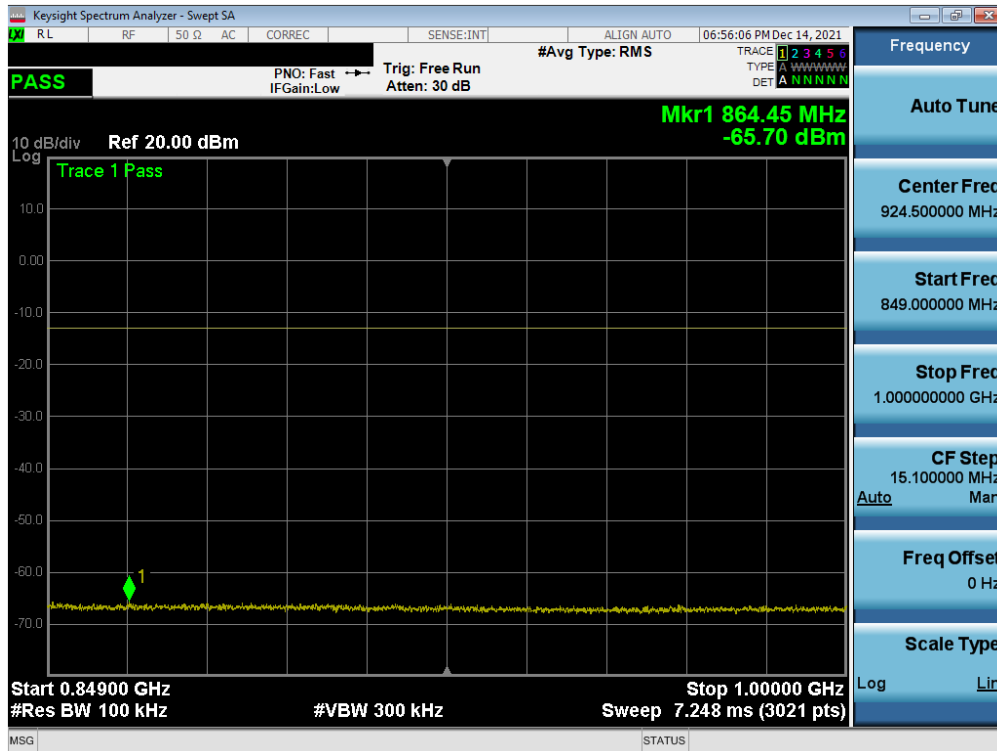


Plot 7-13. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Low Channel)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 19 of 56

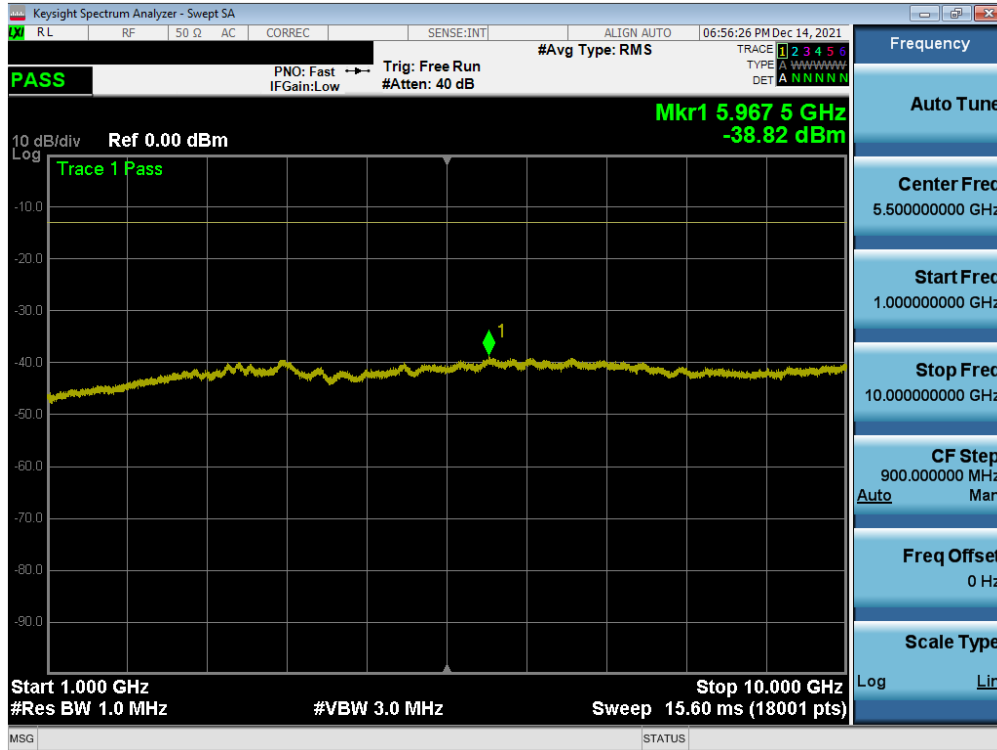


Plot 7-14. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Low Channel)

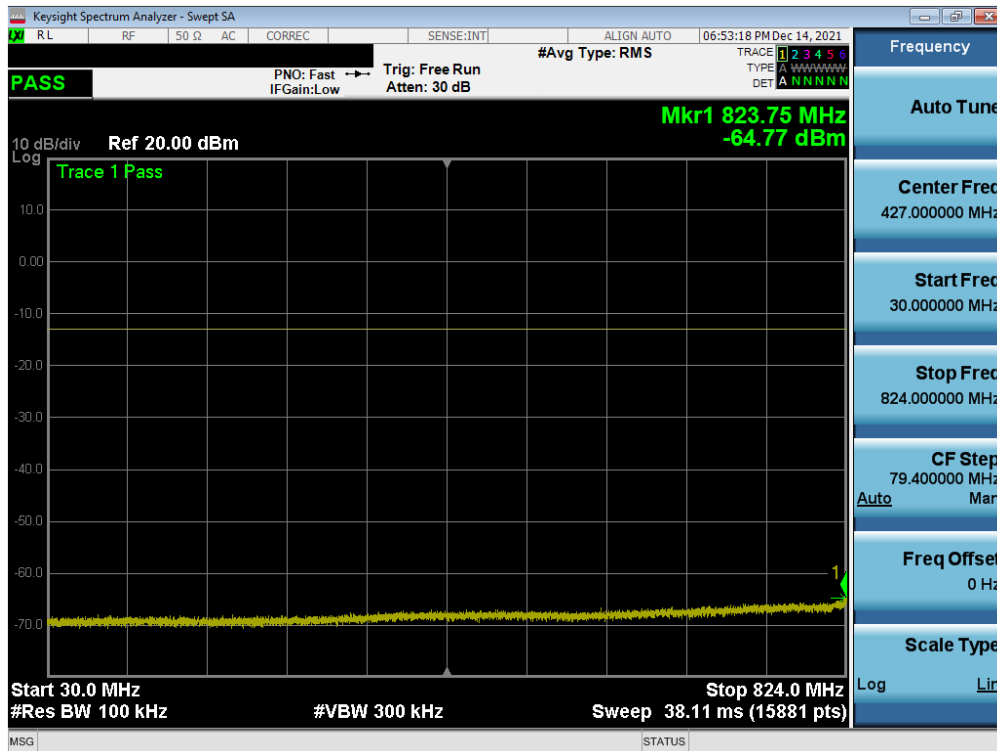


Plot 7-15. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Mid Channel)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 20 of 56

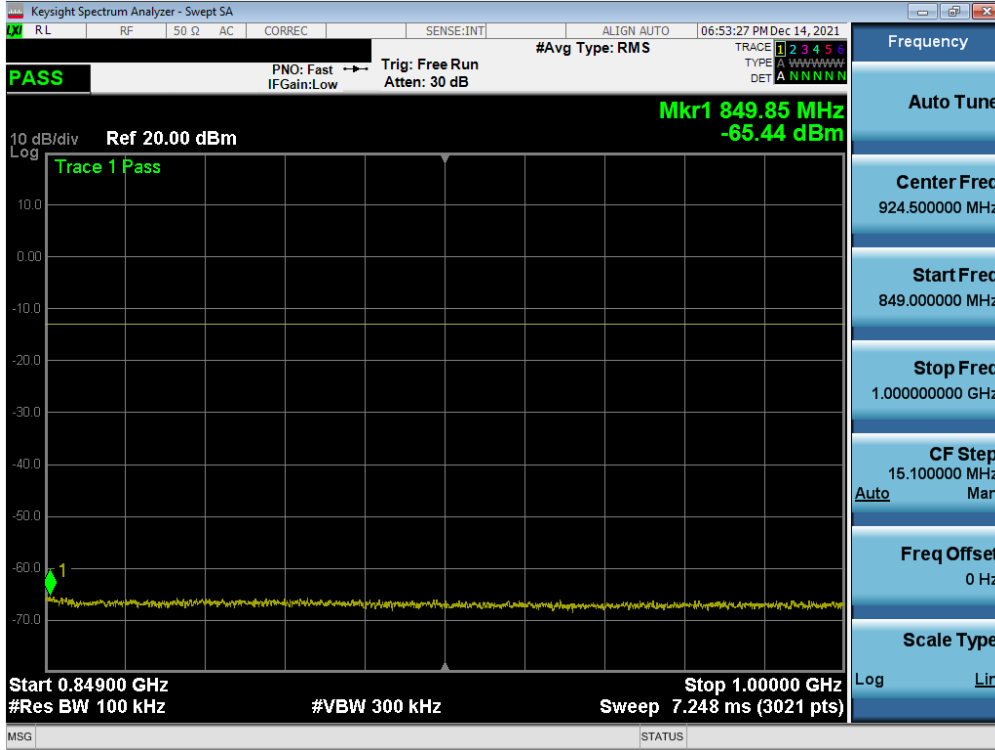


Plot 7-16. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Mid Channel)

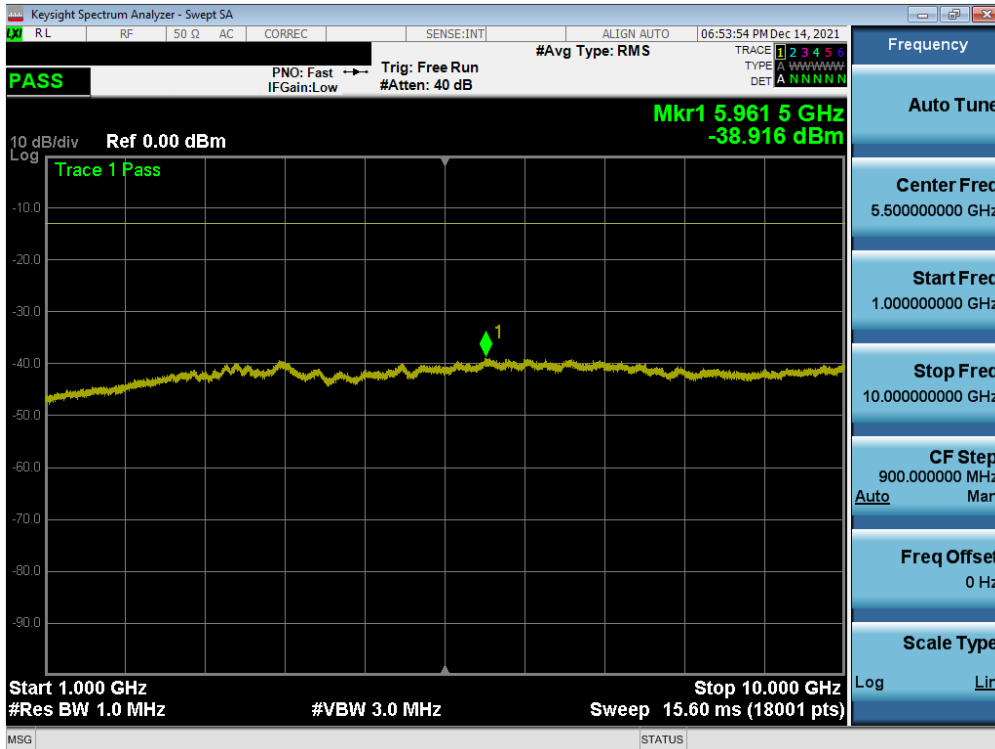


Plot 7-17. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - Mid Channel)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 21 of 56

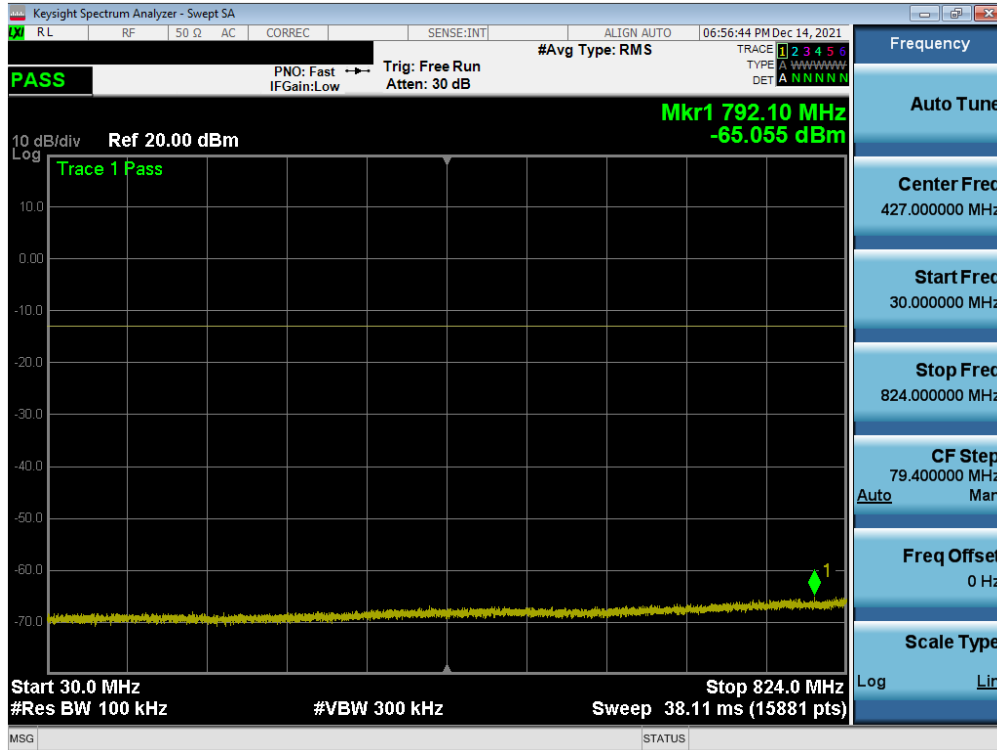


Plot 7-18. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - High Channel)

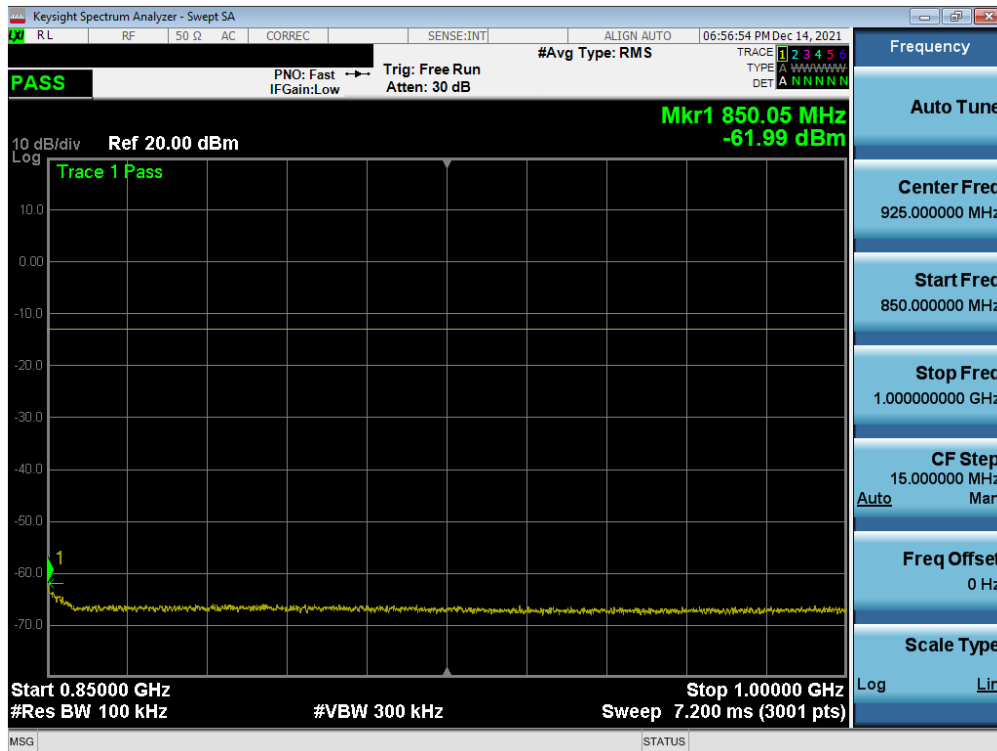

Plot 7-19. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - High Channel)


FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 22 of 56

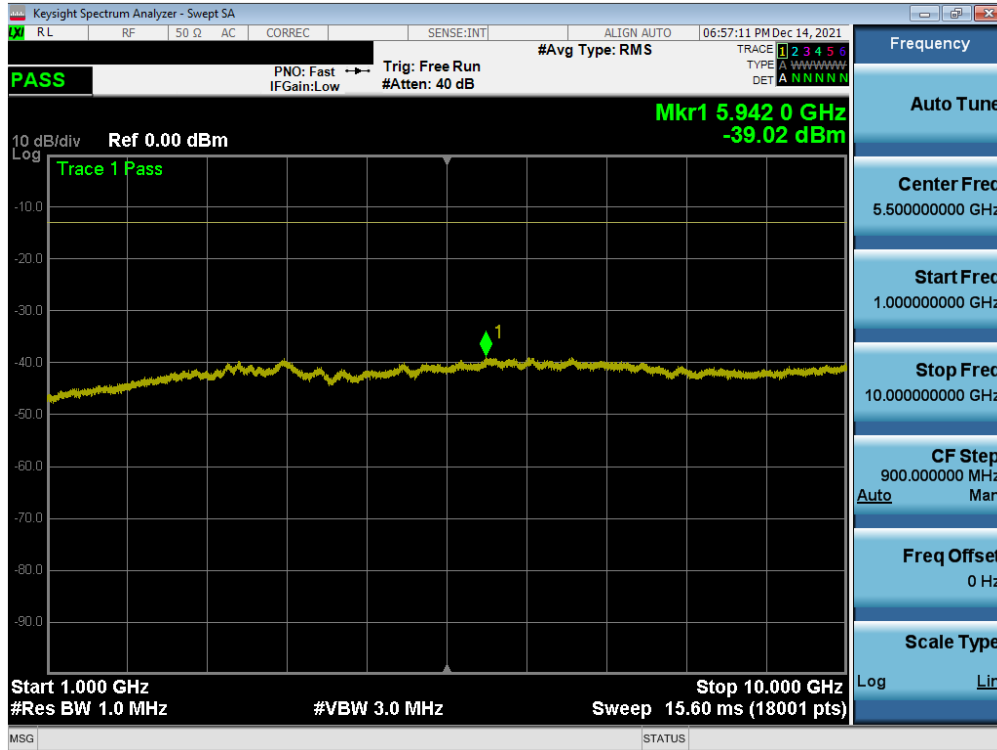


Plot 7-20. Conducted Spurious Plot (LTE Band 5 - 10MHz QPSK - 1 RB - High Channel)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 23 of 56

**GSM/GPRS Cell**

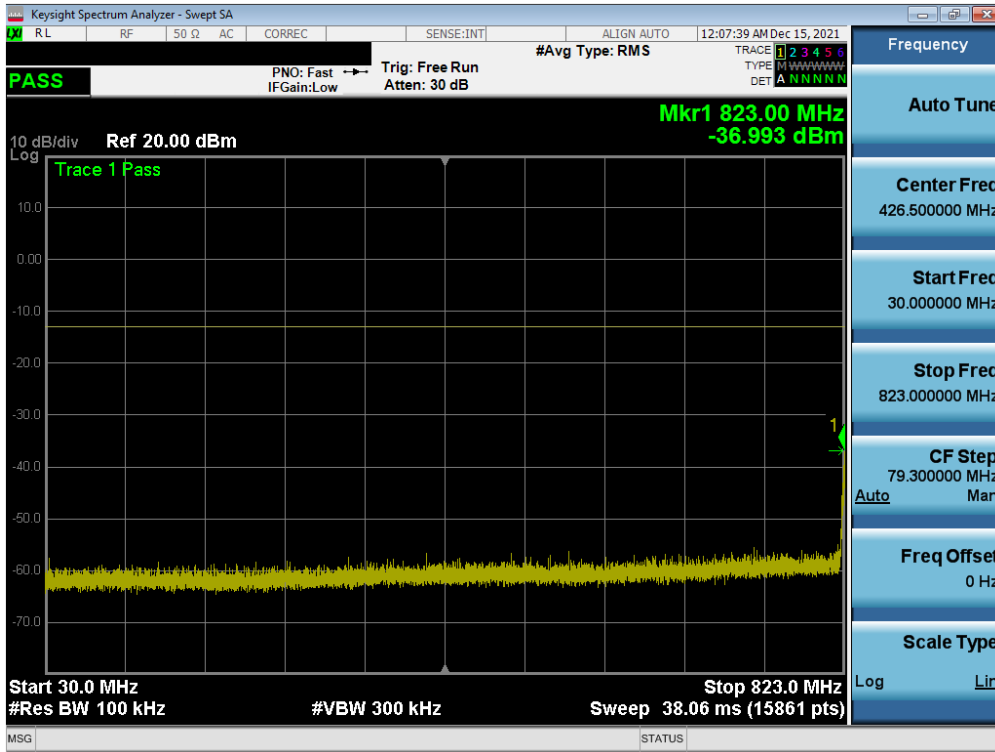


Plot 7-21. Conducted Spurious Plot (GPRS Ch. 128)

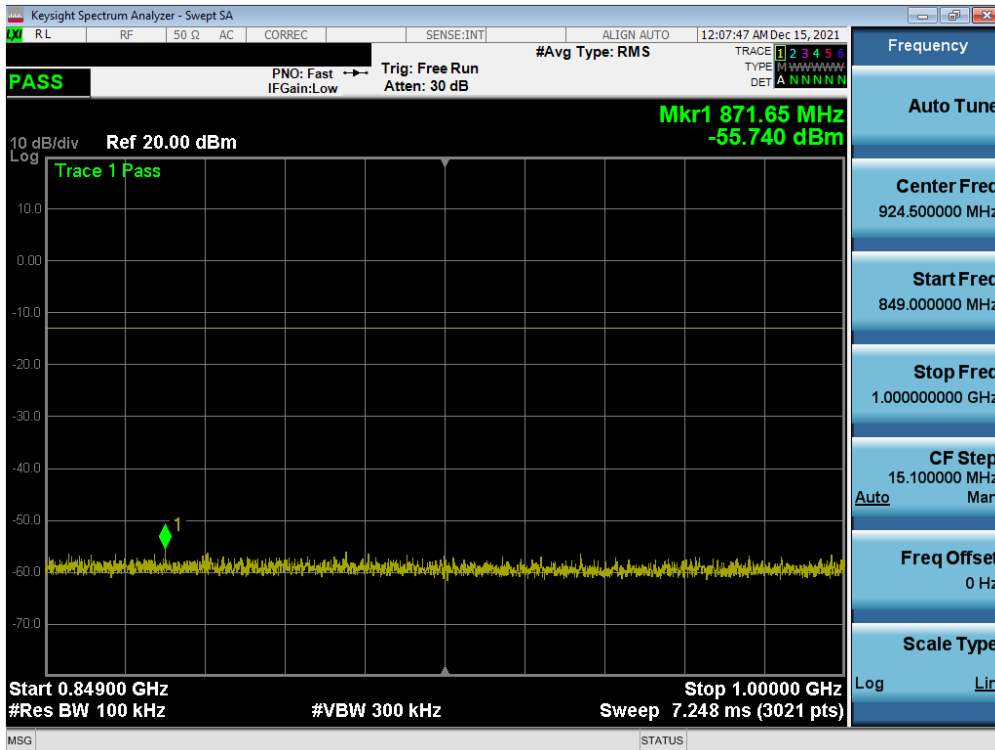


Plot 7-22. Conducted Spurious Plot (GPRS Ch. 128)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 24 of 56



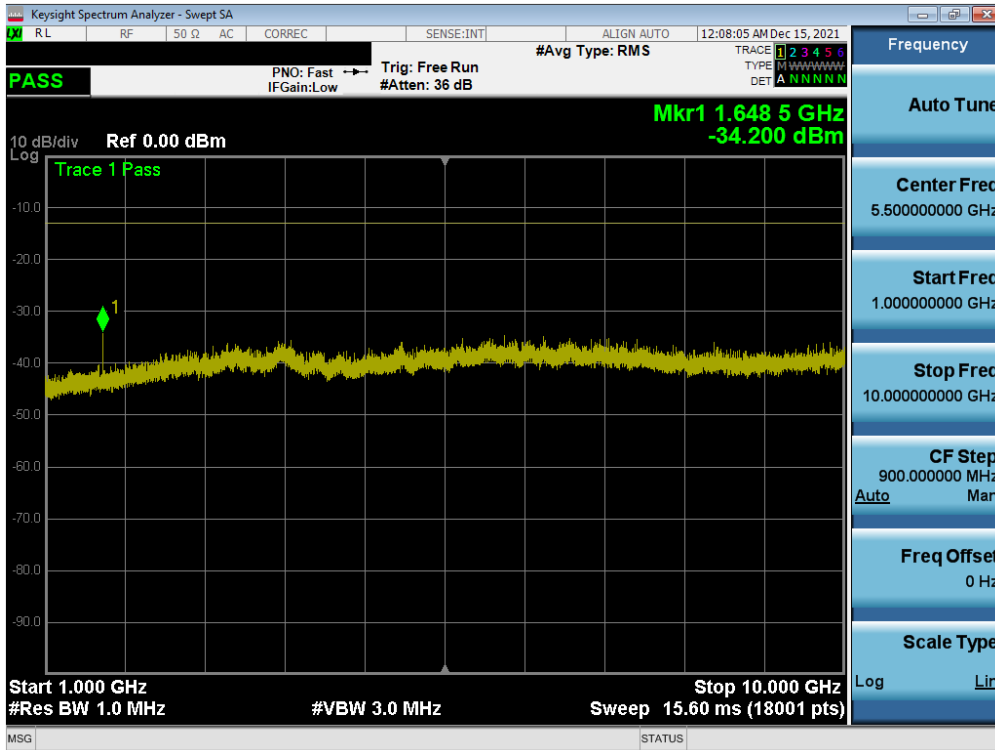


Plot 7-23. Conducted Spurious Plot (GPRS Ch. 128)

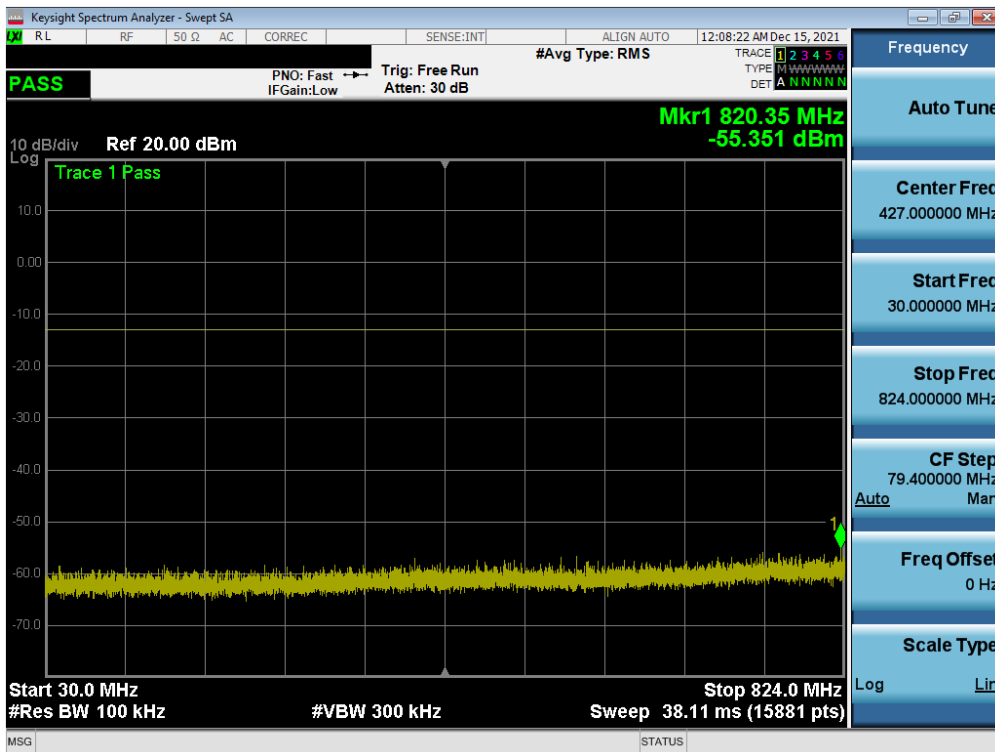


Plot 7-24. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 25 of 56

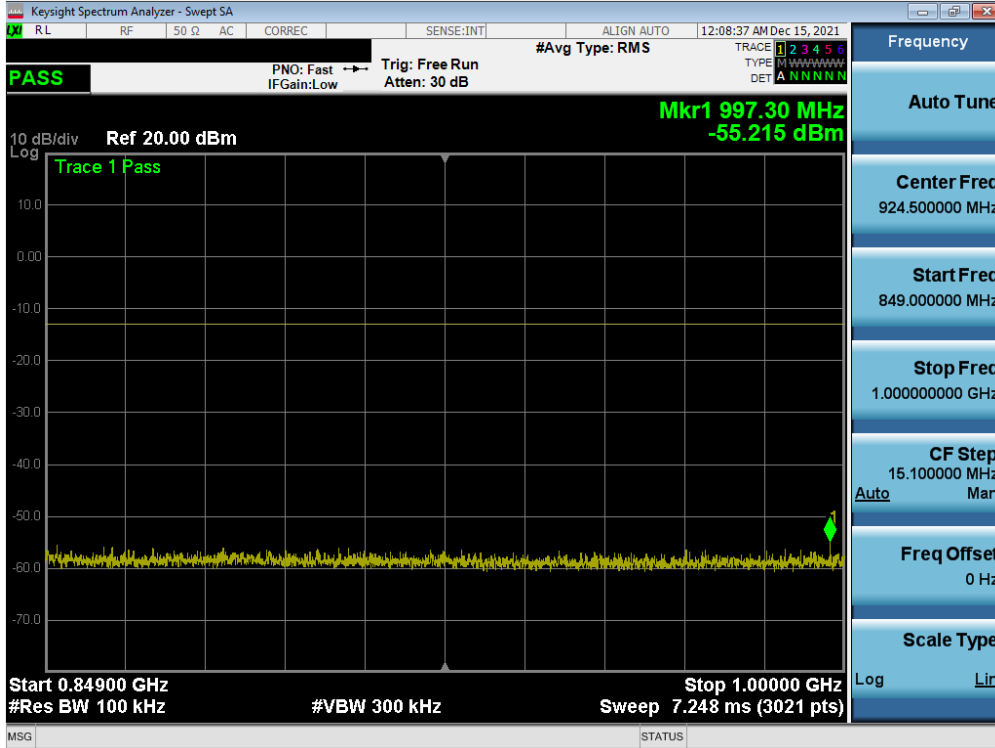


Plot 7-25. Conducted Spurious Plot (GPRS Ch. 190)

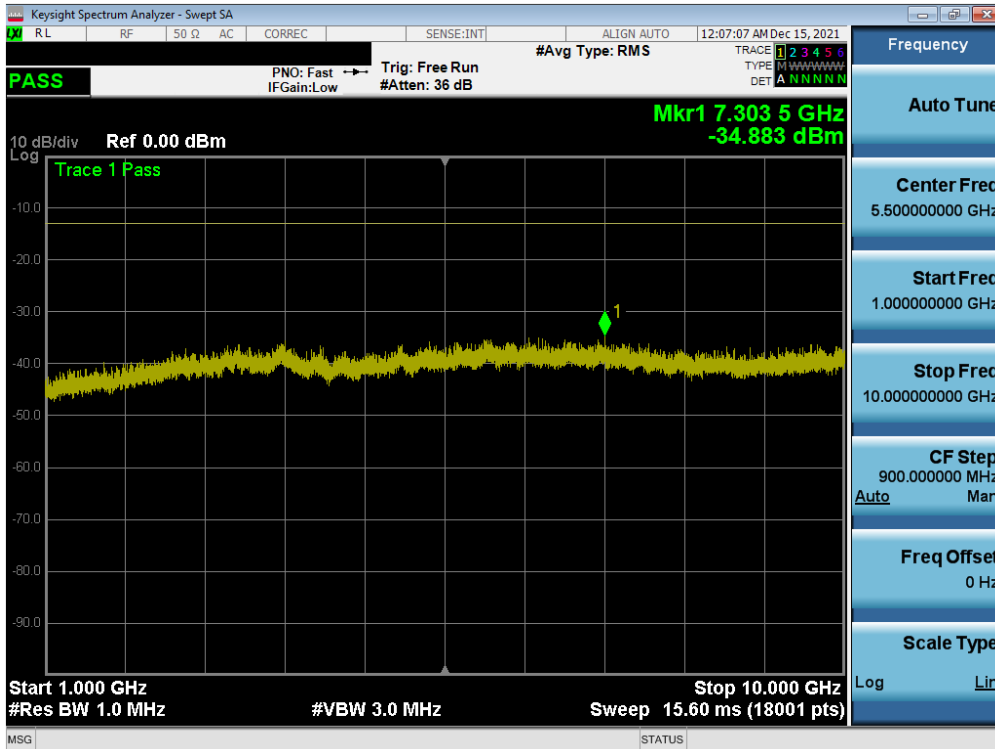


Plot 7-26. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 26 of 56

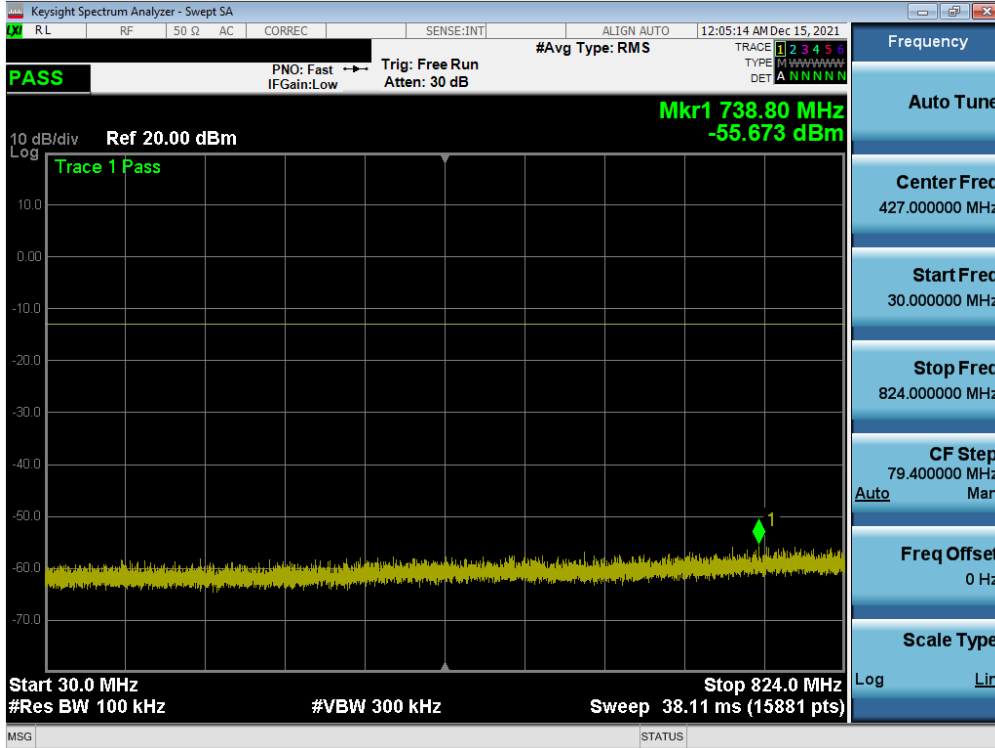


Plot 7-27. Conducted Spurious Plot (GPRS Ch. 251)

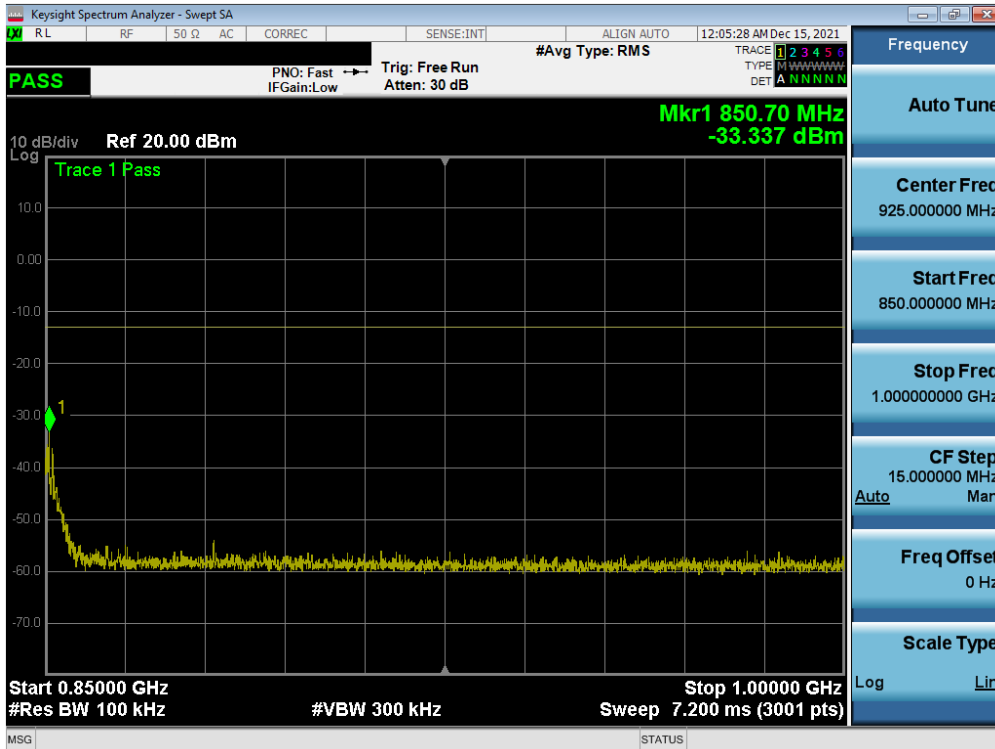

Plot 7-28. Conducted Spurious Plot (GPRS Ch. 251)


FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 27 of 56

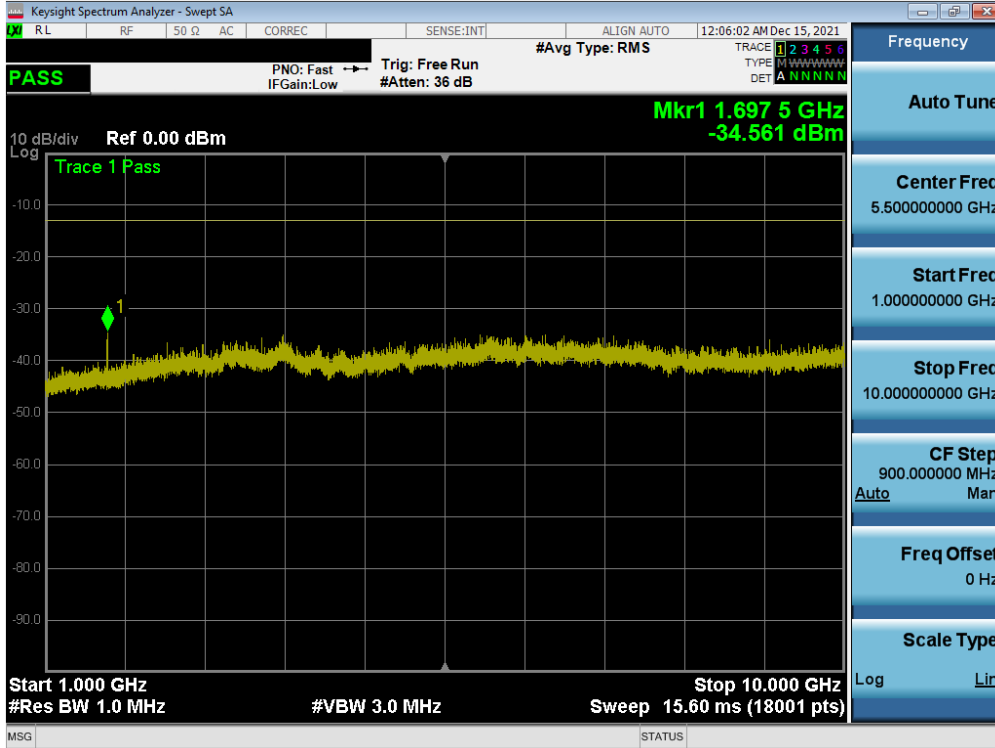


Plot 7-29. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 28 of 56

# WCDMA Cell

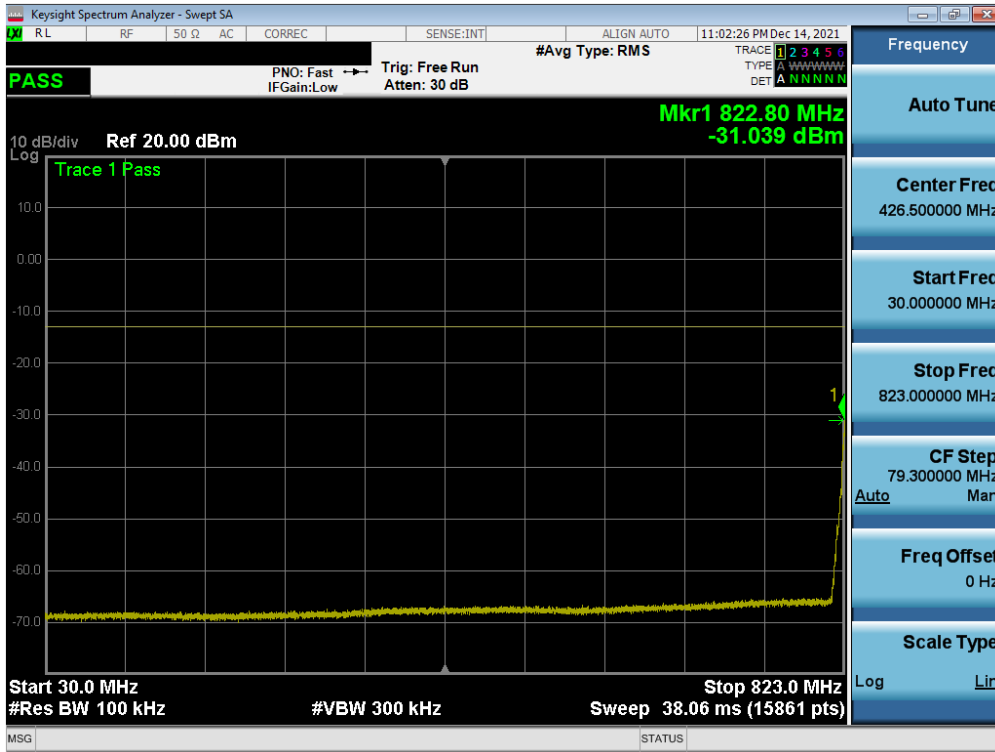


Plot 7-30. Conducted Spurious Plot (WCDMA Ch. 4132)

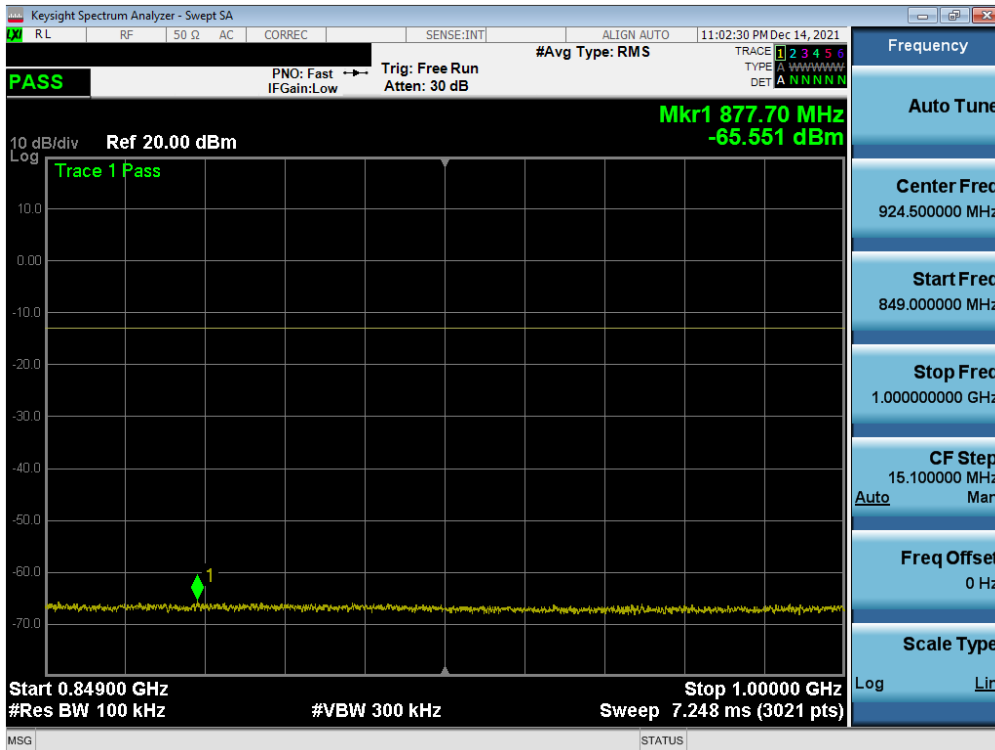


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: A3LSMS901JPN	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 29 of 56

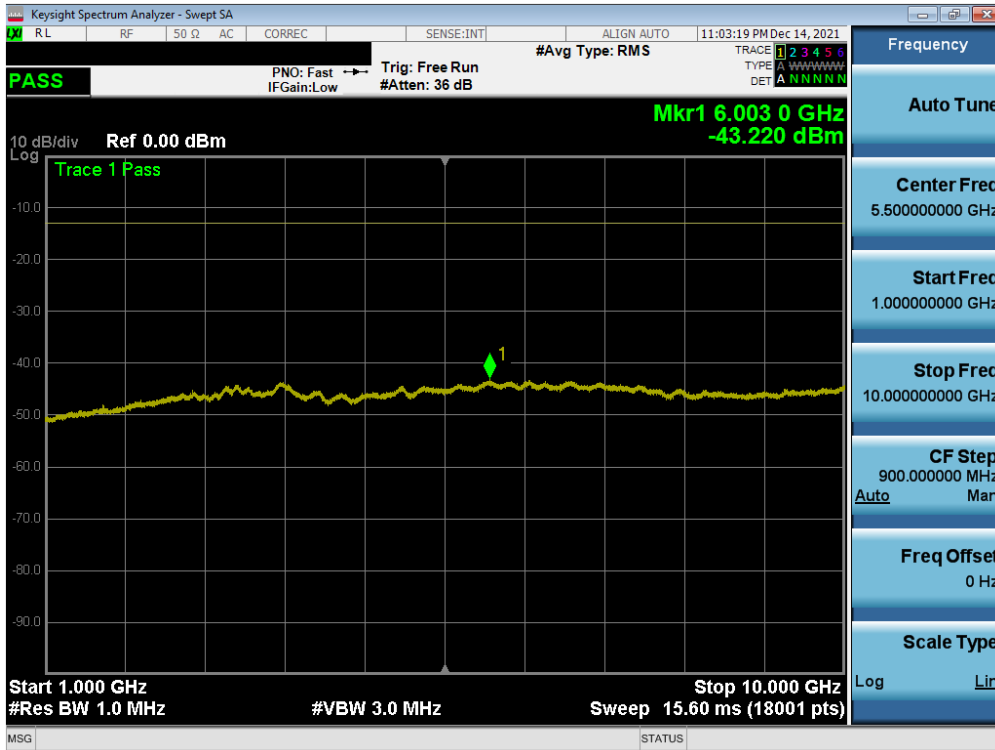


Plot 7-32. Conducted Spurious Plot (WCDMA Ch. 4132)

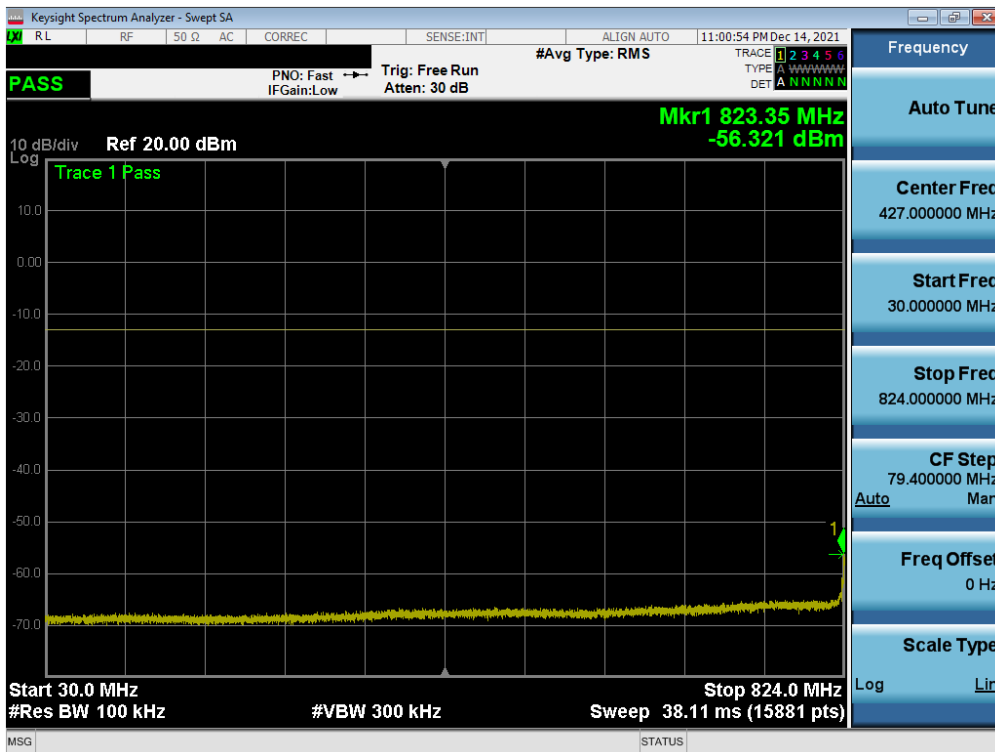


Plot 7-33. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 30 of 56

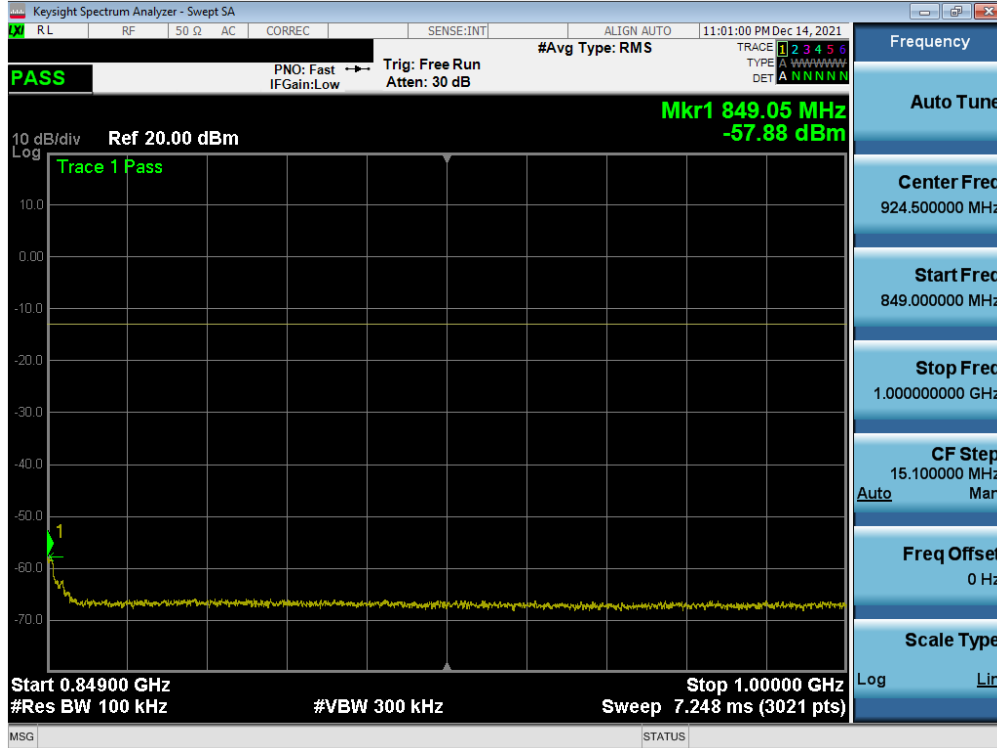


Plot 7-34. Conducted Spurious Plot (WCDMA Ch. 4183)

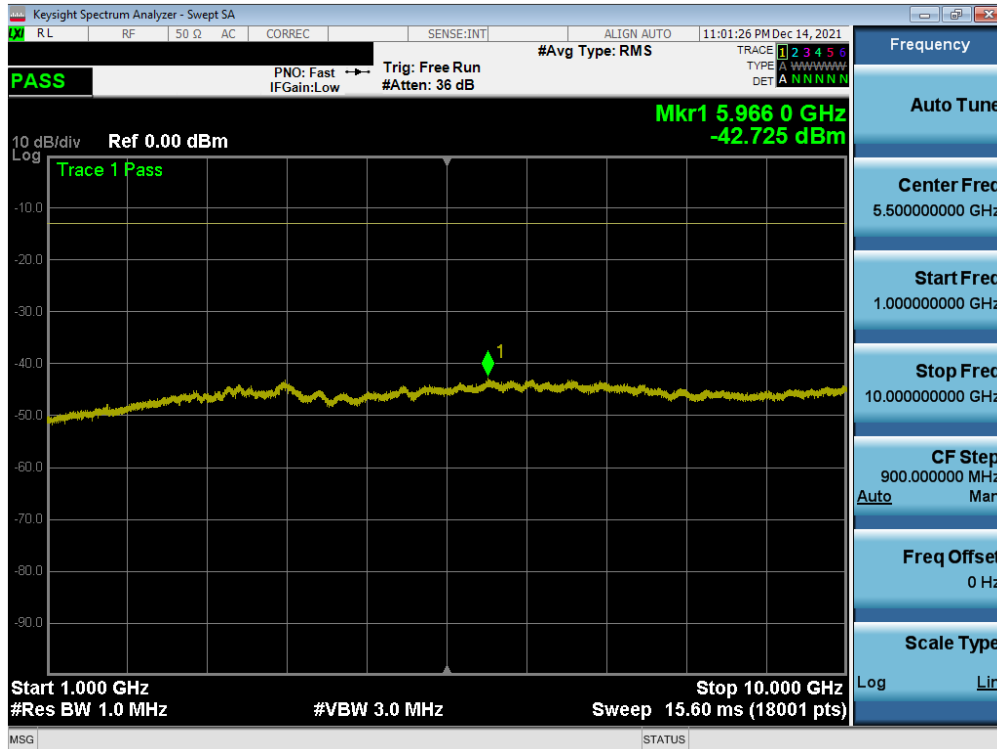


Plot 7-35. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 31 of 56

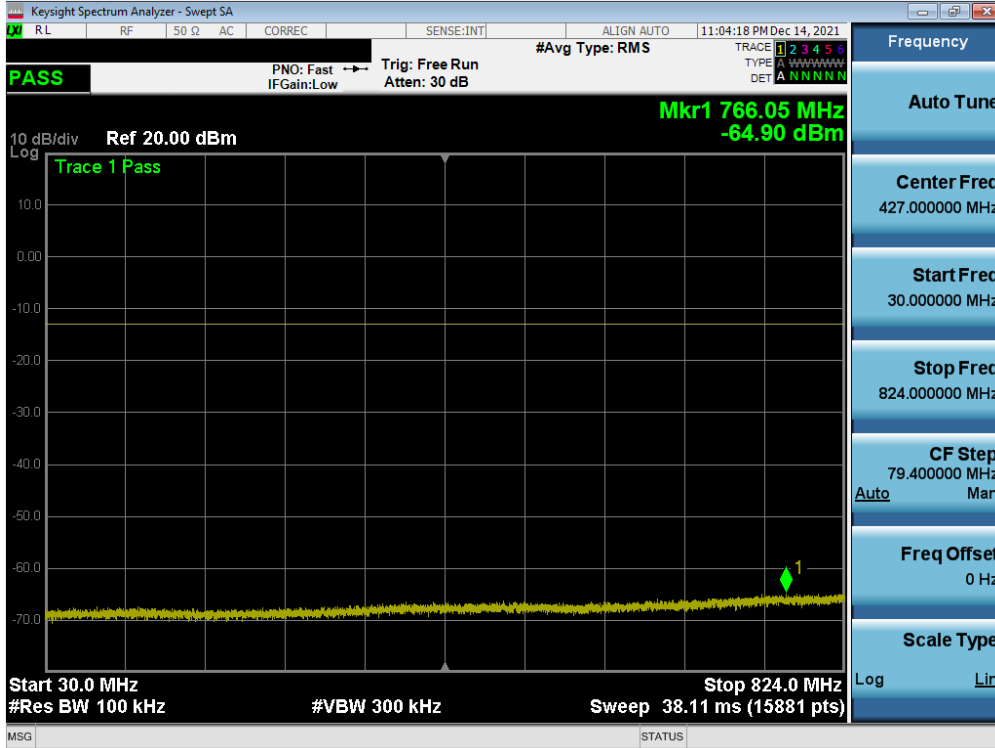


Plot 7-36. Conducted Spurious Plot (WCDMA Ch. 4233)

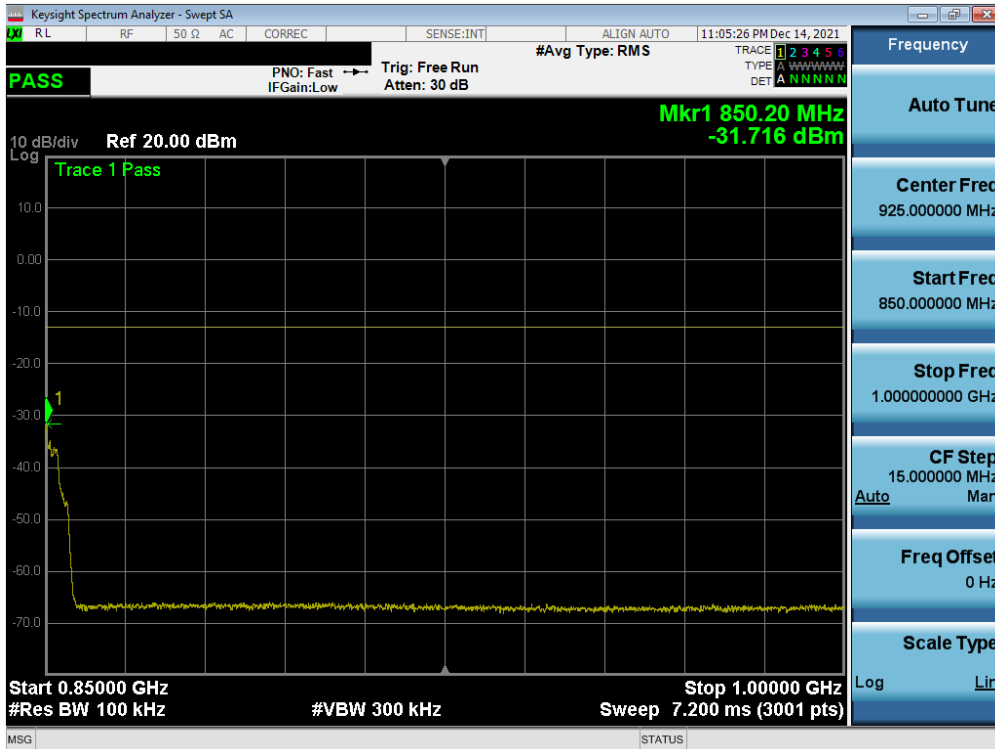

Plot 7-37. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 32 of 56



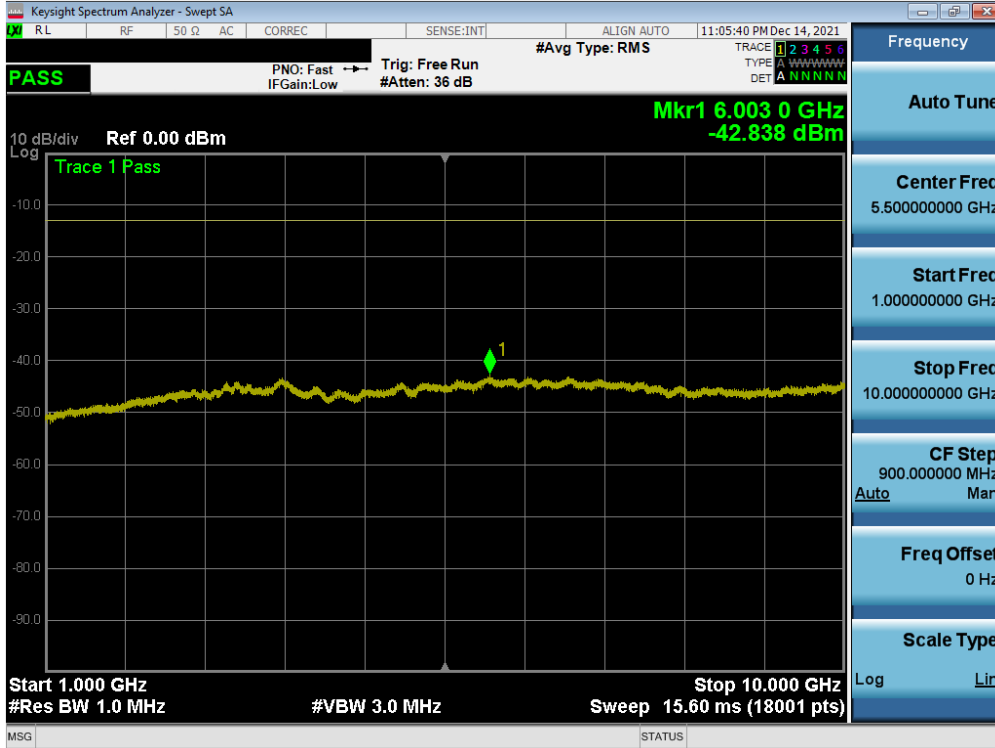

Plot 7-38. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 33 of 56

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3.  $RBW \geq 1\%$  of the emission bandwidth
4.  $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

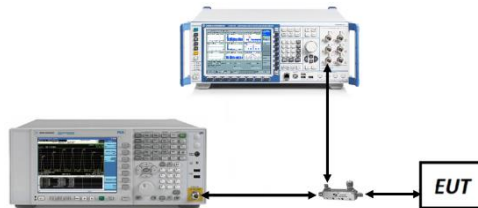


**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


1. Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 34 of 56

### LTE Band 5

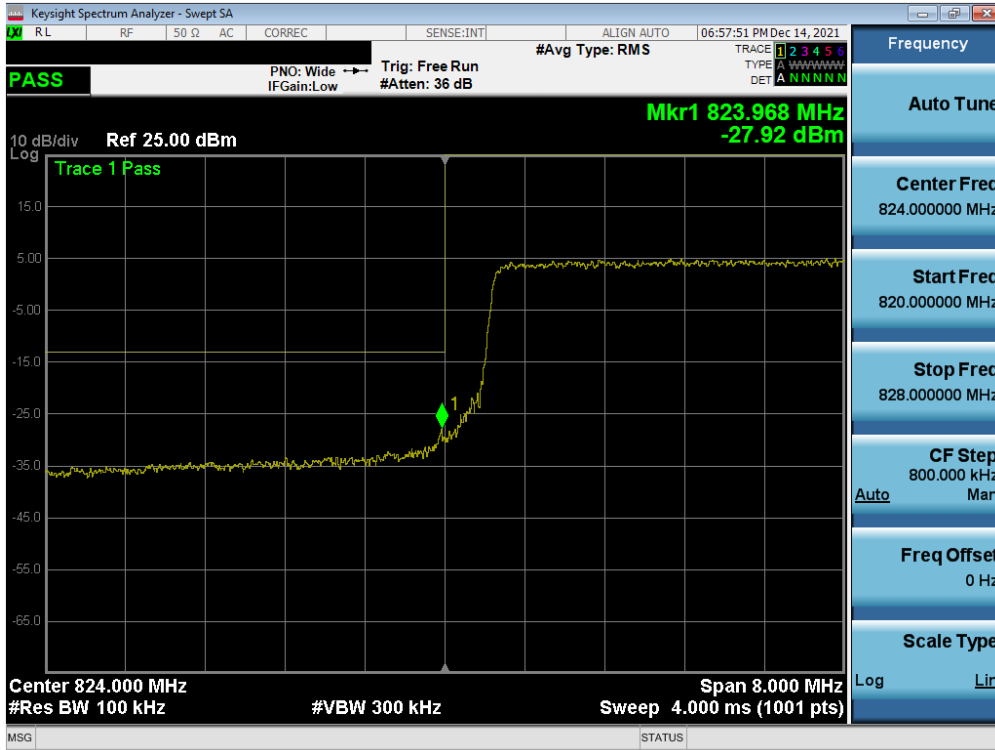


Plot 7-39. Lower Band Edge Plot (LTE Band 5 - 10MHz QPSK – Full RB)

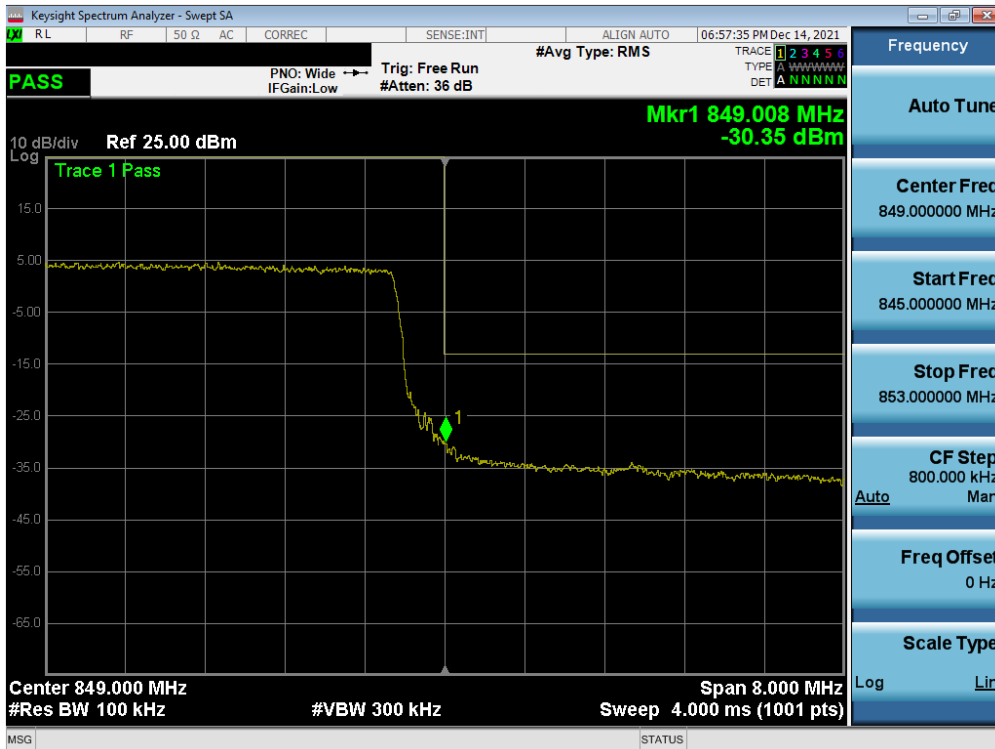


Plot 7-40. Upper Band Edge Plot (LTE Band 5 - 10MHz QPSK – Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 35 of 56

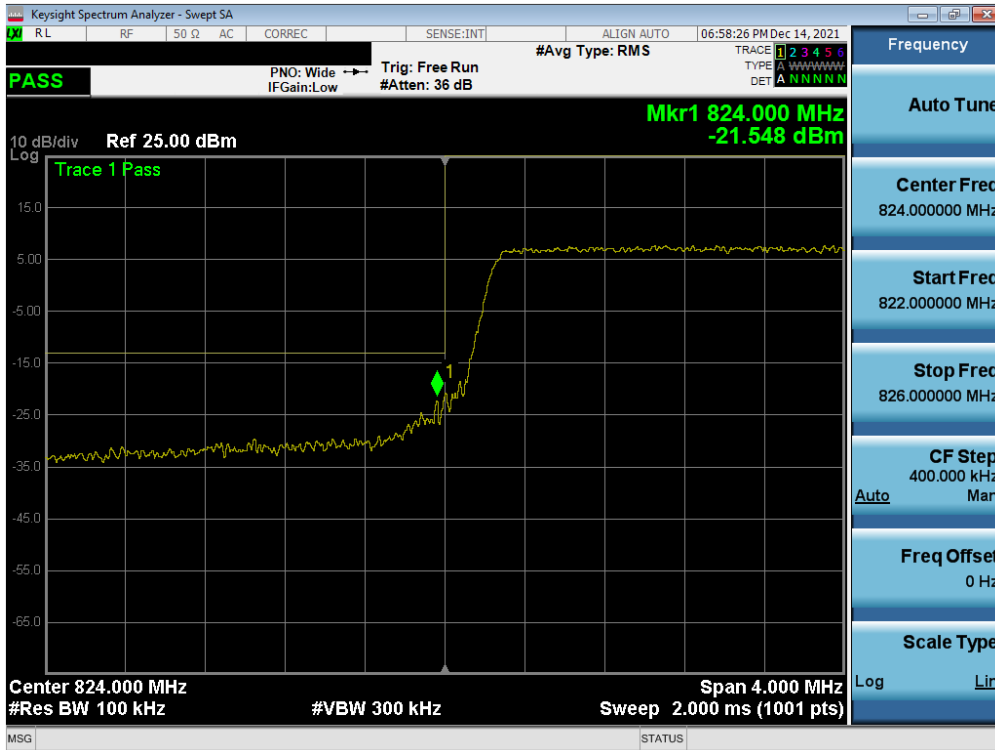


Plot 7-41. Lower Band Edge Plot (LTE Band 5 - 5MHz QPSK – Full RB)

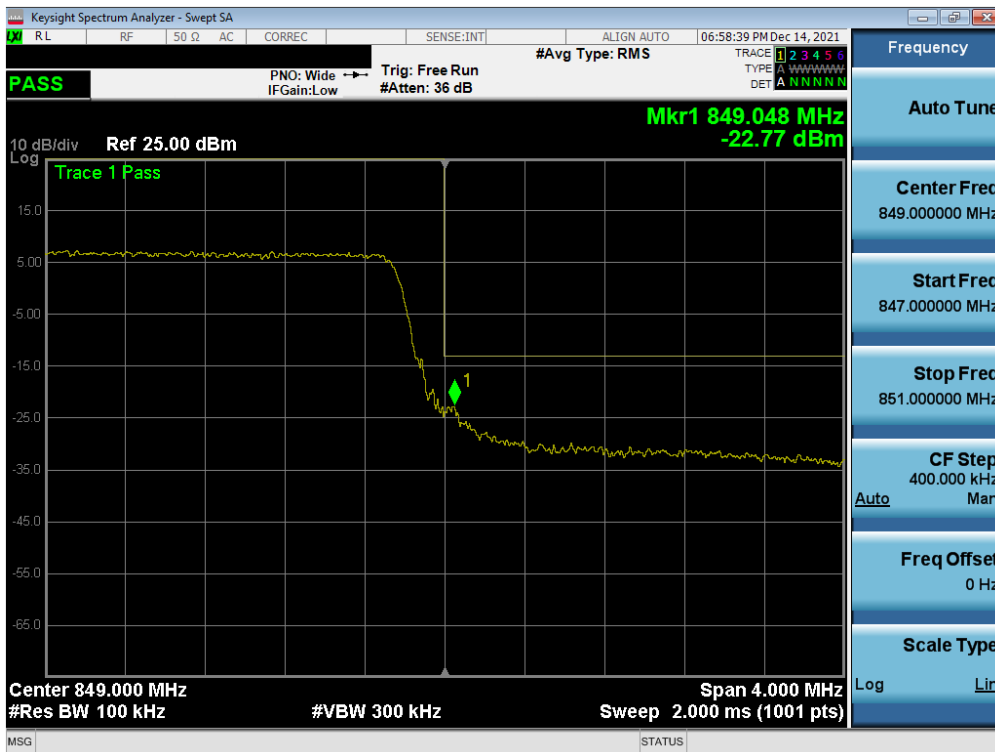

Plot 7-42. Upper Band Edge Plot (LTE Band 5 - 5MHz QPSK – Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 36 of 56

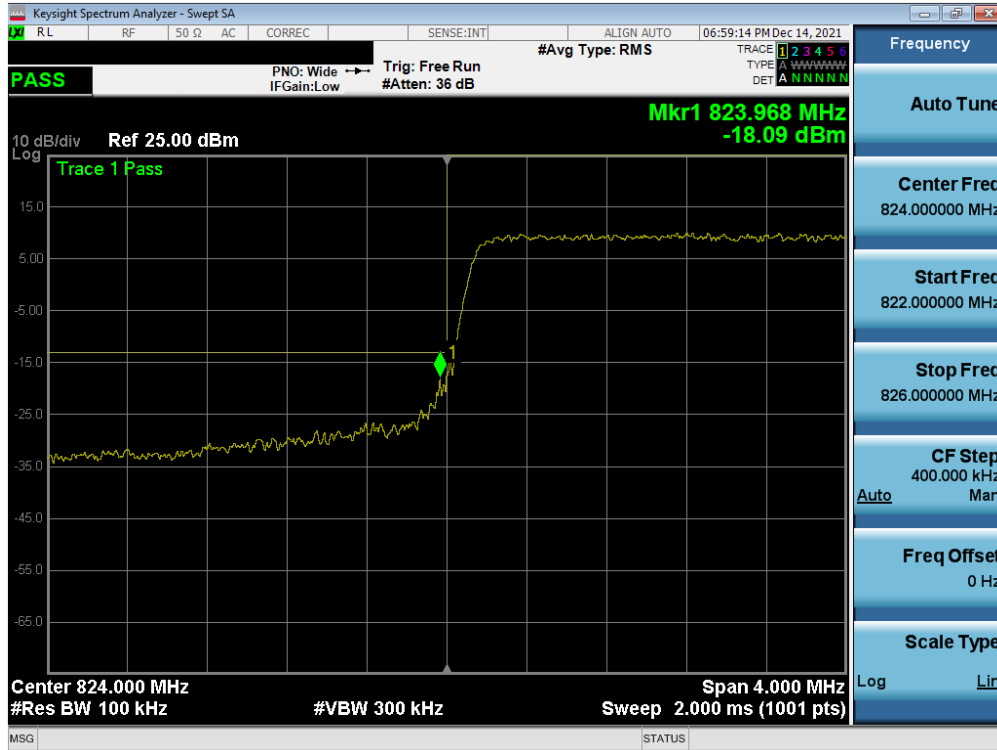


Plot 7-43. Lower Band Edge Plot (LTE Band 5 - 3MHz QPSK – Full RB)



Plot 7-44. Upper Band Edge Plot (LTE Band 5 - 3MHz QPSK – Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 37 of 56

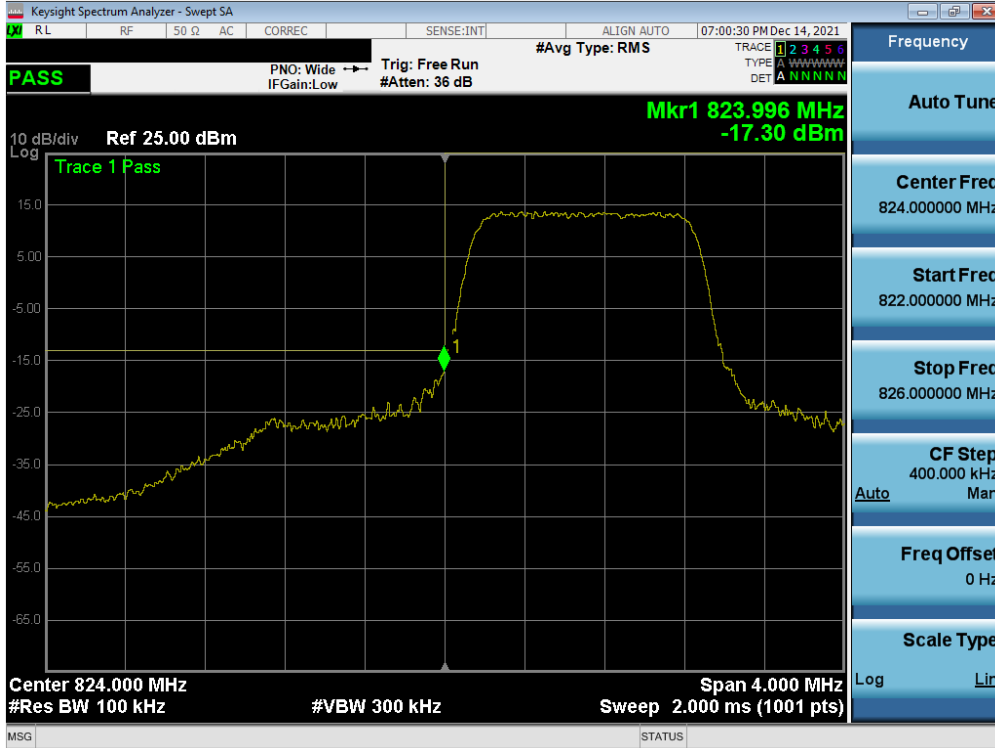


Plot 7-45. Lower Band Edge Plot (LTE Band 5 – 1.4MHz QPSK – Full RB)




Plot 7-46. Upper Band Edge Plot (LTE Band 5 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 38 of 56

**GSM/GPRS Cell**

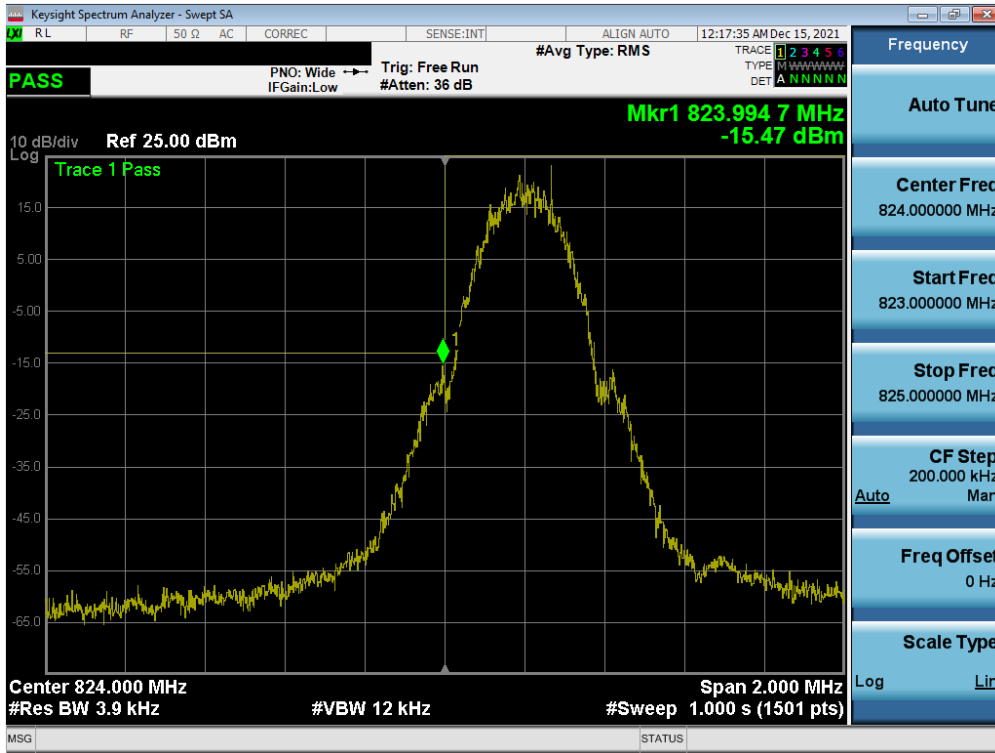


Plot 7-47. Lower Band Edge Plot (GPRS Cell – Ch. 128)

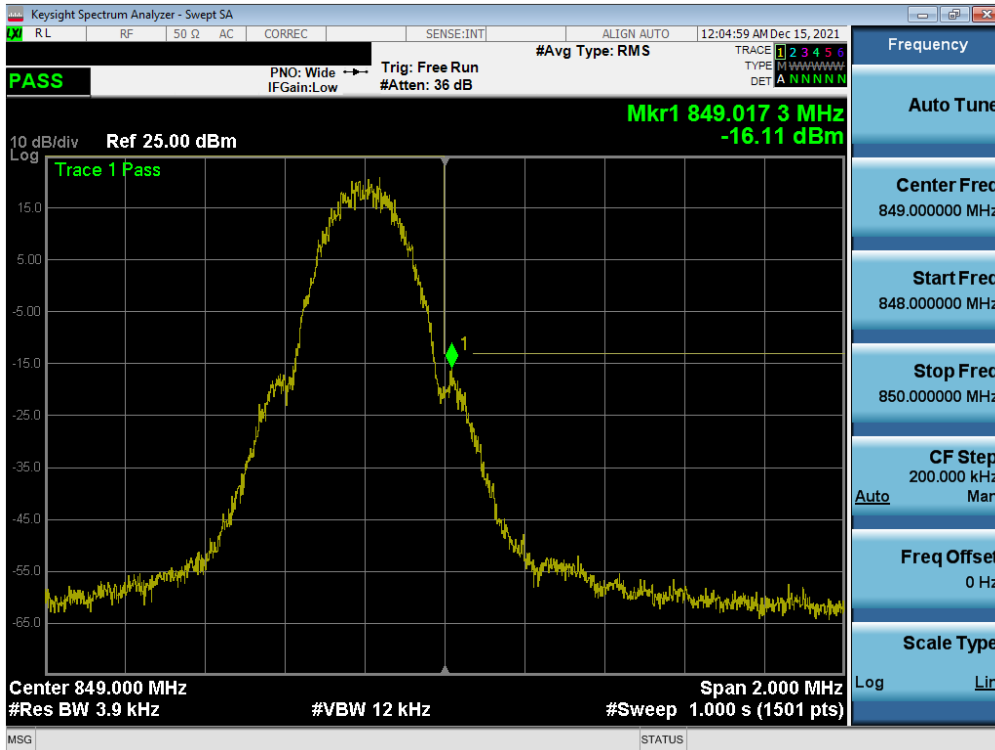

Plot 7-48. Upper Band Edge Plot (GPRS Cell – Ch. 251)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 39 of 56

# WCDMA Cell

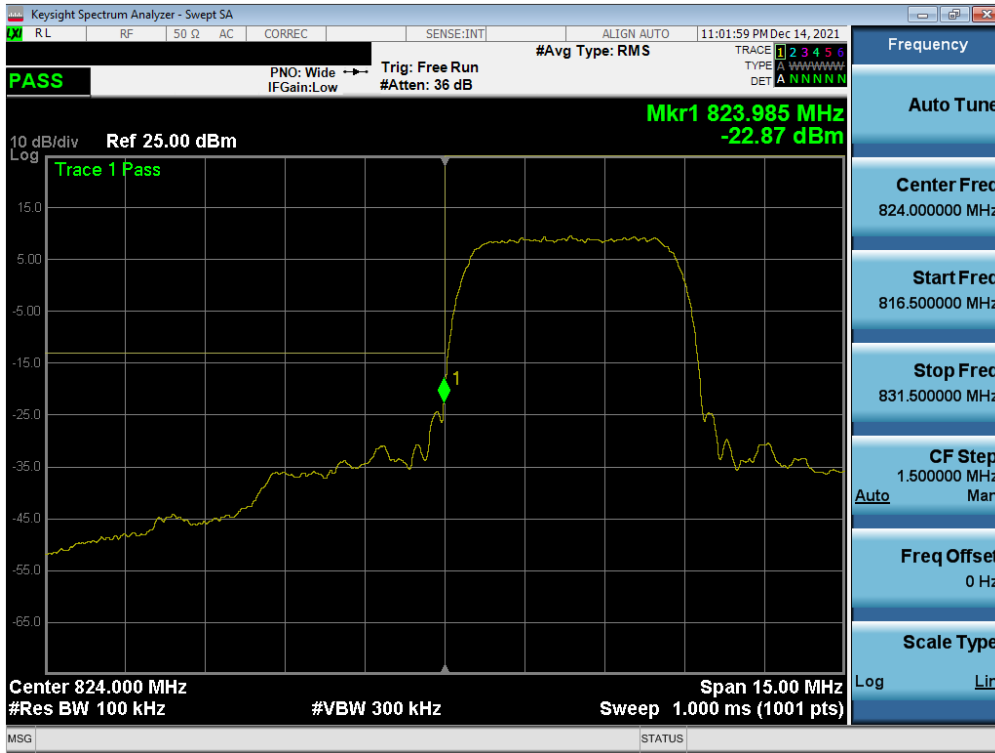

Plot 7-49. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)



Plot 7-50. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 40 of 56



## 7.5 Radiated Power (ERP)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 41 of 56

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

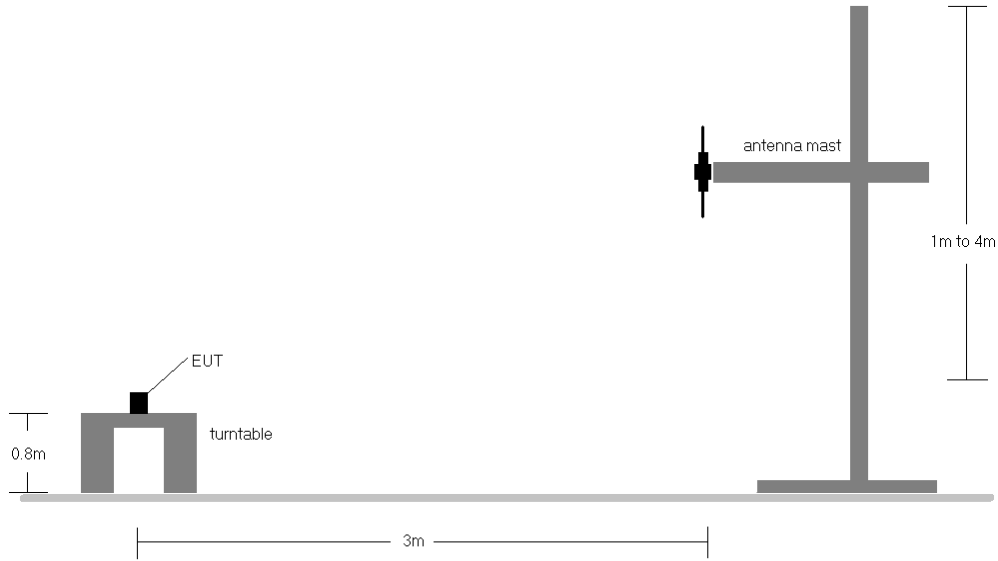

**Figure 7-4. Radiated Test Setup <1GHz**

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.

FCC ID: A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 42 of 56	

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
10 MHz	QPSK	829.0	H	218	277	6.70	1 / 0	16.06	20.61	0.115	38.45	-17.84	22.76	0.189	40.61	-17.85
	QPSK	836.5	H	219	272	6.73	1 / 0	15.62	20.20	0.105	38.45	-18.25	22.35	0.172	40.61	-18.26
	QPSK	844.0	H	204	279	6.76	1 / 0	15.57	20.18	0.104	38.45	-18.27	22.33	0.171	40.61	-18.28
	16-QAM	829.0	H	218	277	6.70	1 / 0	15.12	19.67	0.093	38.45	-18.78	21.82	0.152	40.61	-18.79
5 MHz	QPSK	829.0	H	218	277	6.67	1 / 12	16.08	20.61	0.115	38.45	-17.84	22.76	0.189	40.61	-17.85
	QPSK	836.5	H	219	272	6.73	1 / 0	15.63	20.21	0.105	38.45	-18.24	22.36	0.172	40.61	-18.25
	QPSK	844.0	H	204	279	6.78	1 / 12	15.74	20.37	0.109	38.45	-18.08	22.52	0.179	40.61	-18.09
	16-QAM	829.0	H	218	277	6.67	1 / 12	15.34	19.86	0.097	38.45	-18.59	22.01	0.159	40.61	-18.60
3 MHz	QPSK	829.0	H	218	277	6.66	1 / 7	16.17	20.68	0.117	38.45	-17.77	22.83	0.192	40.61	-17.78
	QPSK	836.5	H	219	272	6.73	1 / 7	15.61	20.19	0.104	38.45	-18.26	22.34	0.171	40.61	-18.27
	QPSK	844.0	H	204	279	6.79	1 / 7	15.58	20.23	0.105	38.45	-18.23	22.38	0.173	40.61	-18.23
	16-QAM	829.0	H	218	277	6.66	1 / 7	15.44	19.96	0.099	38.45	-18.49	22.11	0.162	40.61	-18.50
1.4 MHz	QPSK	829.0	H	218	277	6.66	1 / 5	16.16	20.66	0.116	38.45	-17.79	22.81	0.191	40.61	-17.80
	QPSK	836.5	H	219	272	6.73	1 / 3	15.54	20.12	0.103	38.45	-18.33	22.27	0.169	40.61	-18.34
	QPSK	844.0	H	204	279	6.77	1 / 5	15.53	20.15	0.103	38.45	-18.30	22.30	0.170	40.61	-18.31
	16-QAM	829.0	H	218	277	6.66	1 / 5	15.39	19.89	0.098	38.45	-18.56	22.04	0.160	40.61	-18.56
10 MHz	QPSK (Opposite Pol.)	829.0	V	137	252	6.10	0.00	15.92	19.87	0.097	38.45	-18.58	22.02	0.159	40.61	-18.59
	QPSK (WCP)	829.0	H	200	270	6.70	0.00	12.54	17.09	0.051	38.45	-21.36	19.24	0.084	40.61	-21.37



Table 7-2. ERP Data (LTE Band 5)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.2	GPRS850	V	131	260	22.45	6.13	26.43	0.440	38.45	-12.02	28.58	0.721	40.61	-12.03
836.6	GPRS850	V	145	242	22.86	6.18	26.89	0.489	38.45	-11.56	29.04	0.802	40.61	-11.57
848.8	GPRS850	V	144	249	22.28	6.41	26.54	0.450	38.45	-11.92	28.69	0.739	40.61	-11.92
836.6	GPRS850	H	187	173	20.42	6.74	25.01	0.317	38.45	-13.44	27.16	0.520	40.61	-13.45
836.6	EDGE850	V	145	242	17.29	6.18	21.32	0.136	38.45	-17.13	23.47	0.222	40.61	-17.14
836.6	GPRS850 (WCP)	V	118	292	16.62	6.18	20.65	0.116	38.45	-17.80	22.80	0.191	40.61	-17.81

Table 7-3. ERP Data (GPRS Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.4	WCDMA850	H	224	288	15.66	6.67	20.18	0.104	38.45	-18.27	22.33	0.171	40.61	-18.27
836.6	WCDMA850	H	225	278	15.75	6.74	20.34	0.108	38.45	-18.11	22.49	0.177	40.61	-18.12
846.6	WCDMA850	H	212	282	15.14	6.78	19.77	0.095	38.45	-18.68	21.92	0.156	40.61	-18.68
836.6	WCDMA850	V	137	258	13.86	6.18	17.89	0.062	38.45	-20.56	20.04	0.101	40.61	-20.57
836.6	WCDMA850 (WCP)	V	127	285	9.49	6.74	14.08	0.026	38.45	-24.37	16.23	0.042	40.61	-24.38

Table 7-4. ERP Data (WCDMA Cell)

FCC ID: A3LSMS901JPN		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 43 of 56	

## 7.6 Radiated Spurious Emissions Measurements

### Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: A3LSMS901JPN	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 44 of 56

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

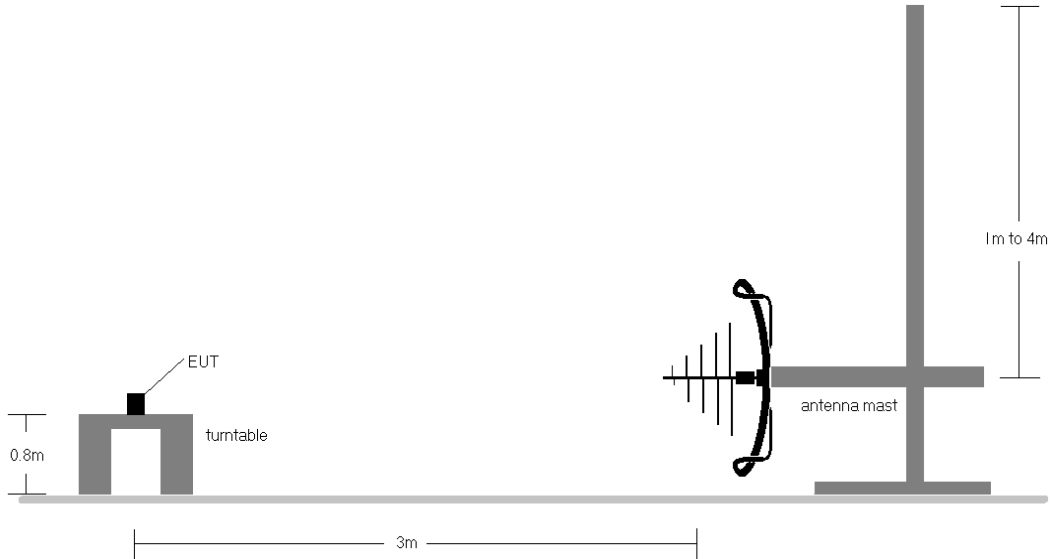

**Figure 7-5. Test Instrument & Measurement Setup < 1GHz**

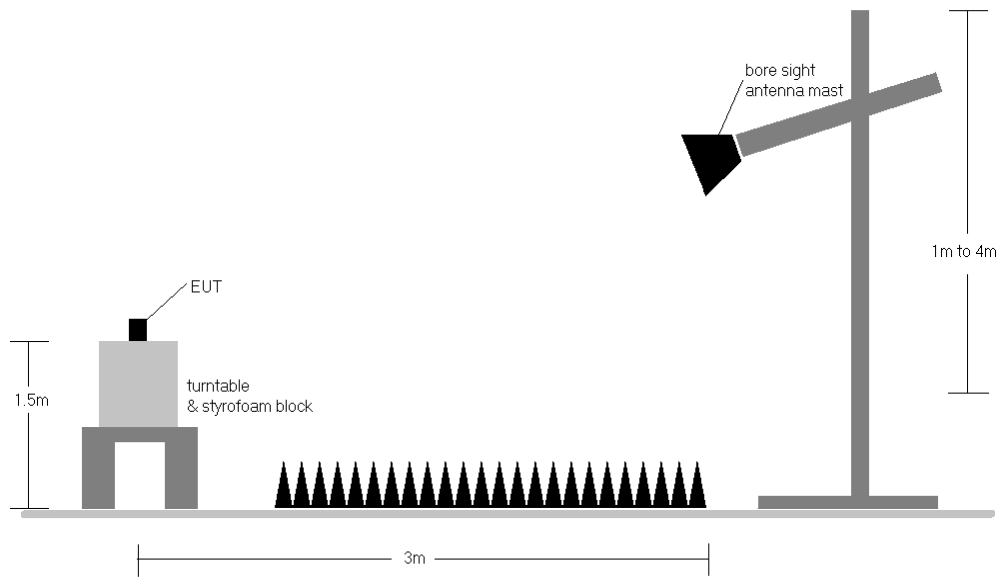



**Figure 7-6. Test Instrument & Measurement Setup >1 GHz**


<p>FCC ID: A3LSMS901JPN</p>	<p><b>PCTEST</b> Proud to be part of element</p>	<p><b>PART 22 MEASUREMENT REPORT</b></p>	<p><b>Approved by:</b> Technical Manager</p>
<p><b>Test Report S/N:</b> 1M2112090153-02.A3L</p>	<p><b>Test Dates:</b> 12/09/2021 - 12/31/2021</p>	<p><b>EUT Type:</b> Portable Handset</p>	<p>Page 45 of 56</p>

## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMS901JPN	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 46 of 56

## LTE Band 5

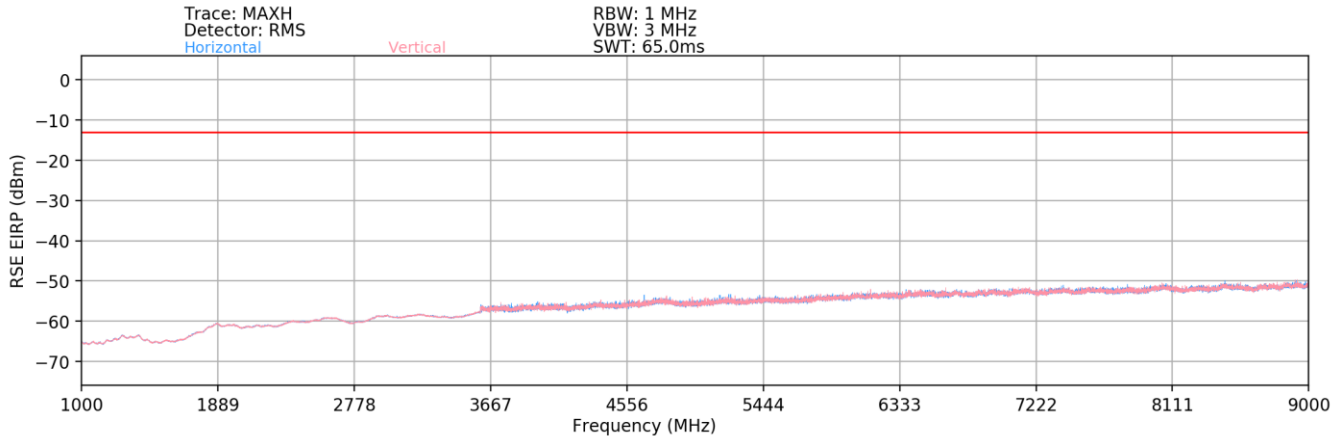

**Plot 7-51. Radiated Spurious Plot (LTE Band 5)**

<b>Bandwidth (MHz):</b>	10
<b>Frequency (MHz):</b>	829
<b>RB / Offset:</b>	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1658.00	H	-	-	-76.41	-3.79	26.80	-68.46	-13.00	-55.46
2487.00	H	-	-	-76.69	0.46	30.77	-64.48	-13.00	-51.48
3316.00	H	-	-	-77.18	1.80	31.62	-63.64	-13.00	-50.64
4145.00	H	-	-	-77.23	2.87	32.64	-62.61	-13.00	-49.61
4974.00	H	-	-	-77.78	3.89	33.11	-62.15	-13.00	-49.15

**Table 7-5. Radiated Spurious Data (LTE Band 5 – Low Channel)**

<b>Bandwidth (MHz):</b>	10
<b>Frequency (MHz):</b>	836.5
<b>RB / Offset:</b>	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	H	-	-	-76.35	-3.65	27.00	-68.26	-13.00	-55.26
2509.50	H	141	23	-76.38	0.71	31.33	-63.93	-13.00	-50.93
3346.00	H	-	-	-77.23	1.89	31.66	-63.60	-13.00	-50.60
4182.50	H	-	-	-77.58	2.84	32.26	-62.99	-13.00	-49.99
5019.00	H	-	-	-78.16	4.19	33.03	-62.23	-13.00	-49.23



**Table 7-6. Radiated Spurious Data (LTE Band 5 – Mid Channel)**

<b>FCC ID:</b> A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 47 of 56	

Bandwidth (MHz):	10
Frequency (MHz):	844
RB / Offset:	1 / 25


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1688.00	H	-	-	-76.35	-3.38	27.27	-67.99	-13.00	-54.99
2532.00	H	-	-	-76.81	1.04	31.23	-64.03	-13.00	-51.03
3376.00	H	-	-	-76.93	1.77	31.84	-63.42	-13.00	-50.42
4220.00	H	-	-	-77.03	2.82	32.79	-62.47	-13.00	-49.47
5064.00	H	-	-	-78.31	4.52	33.21	-62.05	-13.00	-49.05

**Table 7-7. Radiated Spurious Data (LTE Band 5 – High Channel)**

FCC ID: A3LSMS901JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 48 of 56



## GSM/GPRS Cell

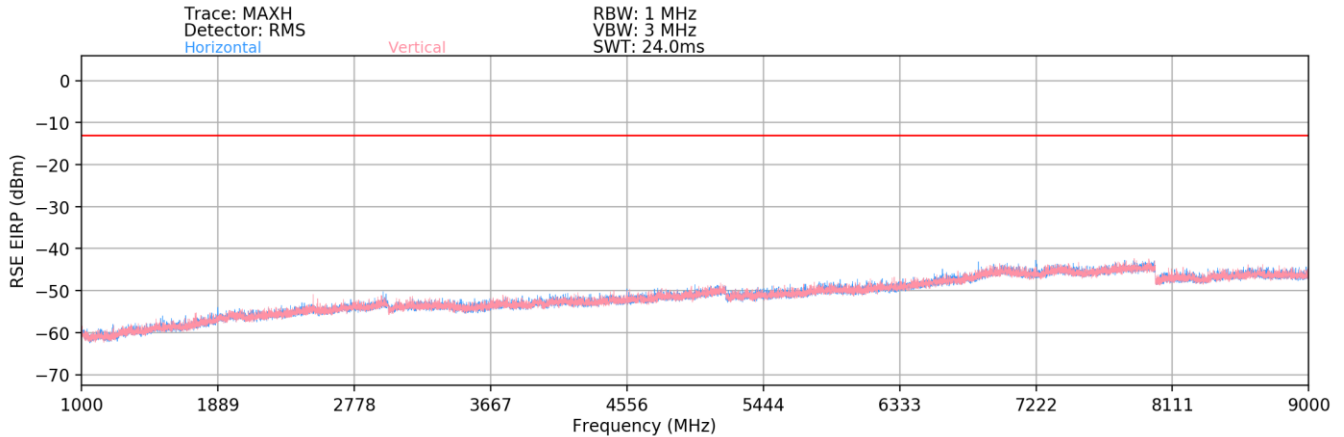

**Plot 7-52. Radiated Spurious Plot (GPRS Cell)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	128
<b>Frequency (MHz):</b>	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	V	-	-	-69.02	-0.96	37.02	-58.24	-13.00	-45.24
2472.6	V	144	318	-66.24	3.36	44.12	-51.14	-13.00	-38.14
3296.8	V	-	-	-69.74	4.82	42.08	-53.18	-13.00	-40.18
4121.0	V	-	-	-70.51	6.10	42.59	-52.66	-13.00	-39.66
4945.2	V	-	-	-70.67	7.51	43.84	-51.42	-13.00	-38.42

**Table 7-8. Radiated Spurious Data (GPRS Cell – Low Channel)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	190
<b>Frequency (MHz):</b>	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	V	-	-	-67.78	-0.88	38.34	-56.92	-13.00	-43.92
2509.8	V	142	316	-64.38	3.40	46.02	-49.24	-13.00	-36.24
3346.4	V	-	-	-69.90	5.10	42.20	-53.05	-13.00	-40.05
4183.0	V	-	-	-69.68	5.92	43.24	-52.02	-13.00	-39.02
5019.6	V	-	-	-70.46	7.10	43.64	-51.62	-13.00	-38.62




**Table 7-9. Radiated Spurious Data (GPRS Cell – Mid Channel)**

<b>FCC ID:</b> A3LSMS901JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 49 of 56	


<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	251
<b>Frequency (MHz):</b>	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.6	V	-	-	-68.58	-0.66	37.76	-57.50	-13.00	-44.50
2546.4	V	159	311	-66.50	3.00	43.50	-51.76	-13.00	-38.76
3395.2	V	-	-	-69.57	5.11	42.54	-52.72	-13.00	-39.72
4244.0	V	-	-	-70.46	5.93	42.47	-52.78	-13.00	-39.78
5092.8	V	-	-	-70.05	7.63	44.58	-50.68	-13.00	-37.68

**Table 7-10. Radiated Spurious Data (GPRS Cell – High Channel)**

<b>FCC ID:</b> A3LSMS901JPN	 <b>PCTEST</b> Proud to be part of  element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset		Page 50 of 56

## WCDMA Cell

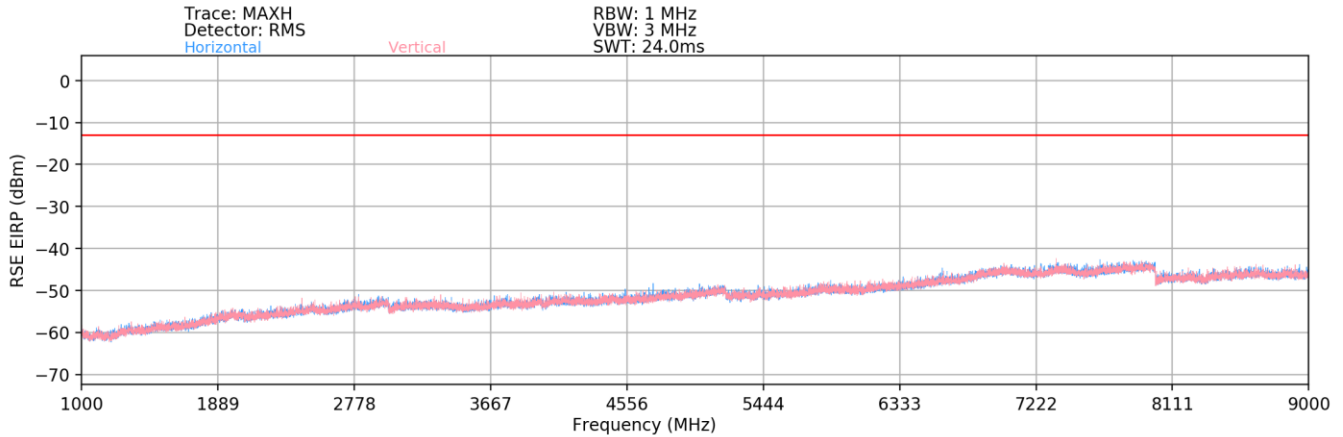

Plot 7-53. Radiated Spurious Plot (WCDMA Cell)

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.80	H	-	-	-76.79	-0.97	29.24	-66.02	-13.00	-53.02
2479.20	H	-	-	-77.63	3.44	32.81	-62.45	-13.00	-49.45
3305.60	H	-	-	-78.18	4.83	33.65	-61.61	-13.00	-48.61

Table 7-11. Radiated Spurious Data (WCDMA Cell – Low Channel)

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	-	-	-76.46	-0.88	29.66	-65.60	-13.00	-52.60
2509.80	H	-	-	-77.48	3.40	32.92	-62.34	-13.00	-49.34
3346.40	H	-	-	-78.40	5.10	33.70	-61.55	-13.00	-48.55

Table 7-12. Radiated Spurious Data (WCDMA Cell – Mid Channel)

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.20	H	-	-	-76.78	-0.70	29.52	-65.74	-13.00	-52.74
2539.80	H	-	-	-77.39	3.06	32.67	-62.59	-13.00	-49.59
3386.40	H	-	-	-78.29	5.19	33.90	-61.35	-13.00	-48.35

Table 7-13. Radiated Spurious Data (WCDMA Cell – High Channel)

FCC ID: A3LSMS901JPN	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 51 of 56

## 7.7 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.***

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


### Test Notes

None



FCC ID: A3LSMS901JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset		Page 52 of 56

LTE Band 5					
Operating Frequency (Hz):		836,500,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,500,454	59	0.0000070
		- 20	836,500,935	540	0.0000646
		- 10	836,500,762	367	0.0000439
		0	836,500,132	-263	-0.0000314
		+ 10	836,499,298	-1,097	-0.0001311
		+ 20 (Ref)	836,500,395	0	0.0000000
		+ 30	836,500,504	109	0.0000130
		+ 40	836,500,572	177	0.0000211
Battery Endpoint	3.36	+ 20	836,501,227	832	0.0000994

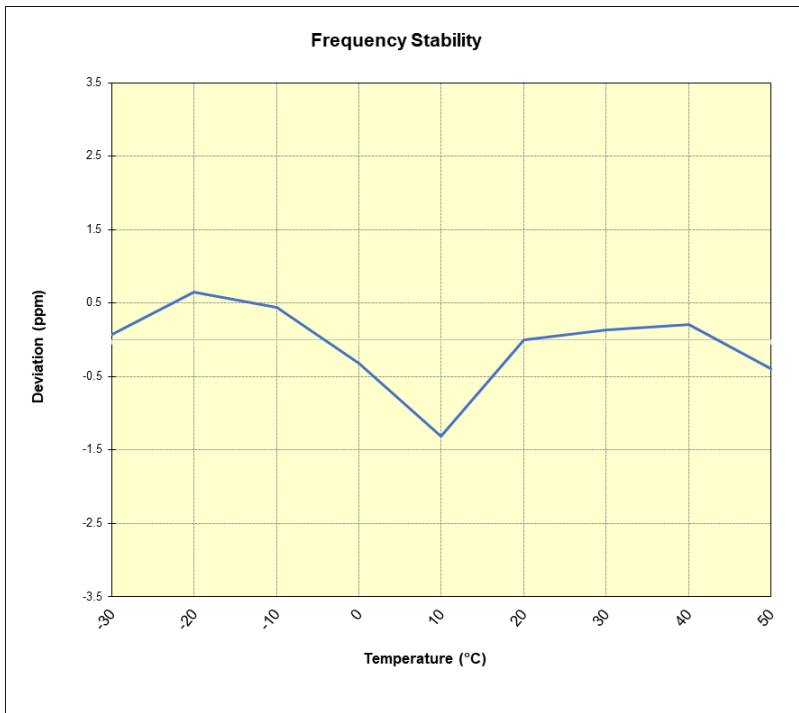Table 7-14. LTE Band 5 Frequency Stability Data




Plot 7-54. LTE Band 5 Frequency Stability Chart



FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset	Page 53 of 56	

GSM/GPRS Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,600,356	-1,019	-0.0001218
		- 20	836,600,629	-746	-0.0000892
		- 10	836,601,428	52	0.0000062
		0	836,602,419	1,043	0.0001247
		+ 10	836,602,157	781	0.0000934
		+ 20 (Ref)	836,601,375	0	0.0000000
		+ 30	836,602,417	1,041	0.0001245
		+ 40	836,602,409	1,034	0.0001236
Battery Endpoint	3.36	+ 20	836,601,574	198	0.0000237

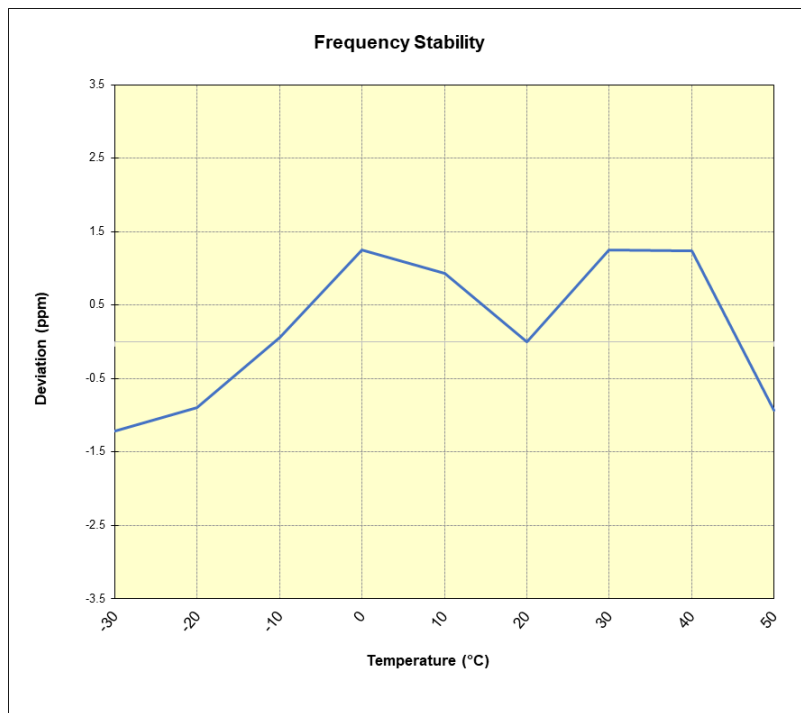Table 7-15. GSM/GPRS Cell Frequency Stability Data




Plot 7-55. GSM/GPRS Cell Frequency Stability Chart



FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 54 of 56

WCDMA Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,600,954	950	0.0001136
		- 20	836,600,542	538	0.0000643
		- 10	836,599,033	-971	-0.0001161
		0	836,601,225	1,221	0.0001459
		+ 10	836,601,180	1,176	0.0001406
		+ 20 (Ref)	836,600,004	0	0.0000000
		+ 30	836,600,742	738	0.0000882
		+ 40	836,601,030	1,026	0.0001226
		+ 50	836,599,762	-242	-0.0000289
Battery Endpoint	3.36	+ 20	836,601,033	1,029	0.0001230

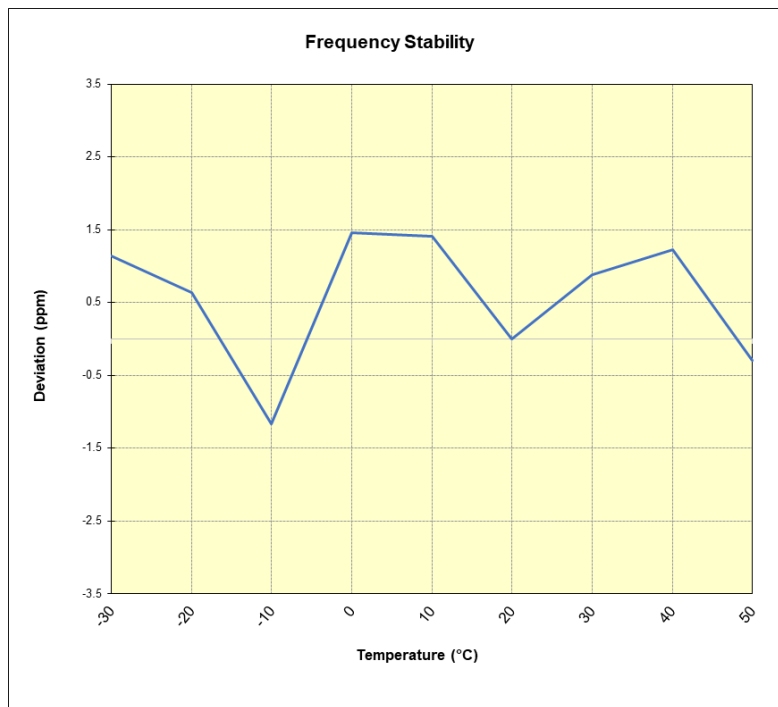Table 7-16. WCDMA Cell Frequency Stability Data





Plot 7-56. WCDMA Cell Frequency Stability Chart

FCC ID: A3LSMS901JPN	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2112090153-02.A3L	Test Dates: 12/09/2021 - 12/31/2021	EUT Type: Portable Handset		Page 55 of 56

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMS901JPN** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: A3LSMS901JPN	 <b>PART 22 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112090153-02.A3L	<b>Test Dates:</b> 12/09/2021 - 12/31/2021	<b>EUT Type:</b> Portable Handset	Page 56 of 56