



PART 90 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

10/8/2021 - 11/10/2021

Test Report Issue Date:

12/17/2021

Test Site/Location:

PCTEST Lab. Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2109220110-06.A3L

| | |
|-------------------|--------------------------------------|
| FCC ID: | A3LSMS908E |
| APPLICANT: | Samsung Electronics Co., Ltd. |

Application Type:

Certification

Model:

SM-S908E/DS

Additional Model(s):

SM-S908E

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

§2.1049, §22(H), §90(S)

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168
D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by






| | | | |
|--|---|---|--|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 1 of 35 |

TABLE OF CONTENTS


| | | |
|-----|---|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope | 4 |
| 1.2 | PCTEST Test Location..... | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION..... | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Test Configuration | 5 |
| 2.4 | EMI Suppression Device(s)/Modifications | 5 |
| 3.0 | DESCRIPTION OF TESTS | 6 |
| 3.1 | Evaluation Procedure | 6 |
| 3.2 | Radiated Power and Radiated Spurious Emissions | 6 |
| 4.0 | MEASUREMENT UNCERTAINTY | 7 |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA | 8 |
| 6.0 | SAMPLE CALCULATIONS | 9 |
| 7.0 | TEST RESULTS | 10 |
| 7.1 | Summary..... | 10 |
| 7.2 | Occupied Bandwidth | 11 |
| 7.3 | Spurious and Harmonic Emissions at Antenna Terminal | 17 |
| 7.4 | Band Edge Emissions at Antenna Terminal | 20 |
| 7.5 | Conducted Power Output Data | 26 |
| 7.6 | Radiated Power (ERP)..... | 27 |
| 7.7 | Radiated Spurious Emissions Measurements..... | 30 |
| 7.8 | Frequency Stability / Temperature Variation | 33 |
| 8.0 | CONCLUSION..... | 35 |

| | | | | |
|--|---|--------------------------------------|---|--|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | | Page 2 of 35 |





MEASUREMENT REPORT

FCC Part 22 & 90



| Mode | Bandwidth | Modulation | Tx Frequency Range [MHz] | Measurement | Max. Power [W] | Max. Power [dBm] | Emission Designator |
|-------------|-----------|------------|--------------------------|-------------|----------------|------------------|---------------------|
| LTE Band 26 | 15 MHz | QPSK | 821.5 | ERP | 0.057 | 17.57 | 13M6G7D |
| | | 16QAM | 821.5 | ERP | 0.041 | 16.12 | 13M6W7D |
| | 15 MHz | QPSK | 821.5 | Conducted | 0.286 | 24.56 | 13M6G7D |
| | | 16QAM | 821.5 | Conducted | 0.244 | 23.88 | 13M6W7D |
| | 10 MHz | QPSK | 819.0 | Conducted | 0.302 | 24.79 | 9M05G7D |
| | | 16QAM | 819.0 | Conducted | 0.266 | 24.24 | 9M05W7D |
| | 5 MHz | QPSK | 816.5 - 821.5 | Conducted | 0.310 | 24.91 | 4M54G7D |
| | | 16QAM | 816.5 - 821.5 | Conducted | 0.249 | 23.97 | 4M55W7D |
| | 3 MHz | QPSK | 815.5 - 822.5 | Conducted | 0.310 | 24.91 | 2M73G7D |
| | | 16QAM | 815.5 - 822.5 | Conducted | 0.264 | 24.21 | 2M75W7D |
| | 1.4 MHz | QPSK | 814.7 - 823.3 | Conducted | 0.309 | 24.90 | 1M12G7D |
| | | 16QAM | 814.7 - 823.3 | Conducted | 0.260 | 24.16 | 1M12W7D |

EUT Overview

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 3 of 35 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- PCTEST is an ISO 17025-2017 accredited test facility under the National Voluntary Laboratory Accreditation Program (NVLAP) with Certificate number 600143-0 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (26168) test laboratory with the site description on file with ISED.

| | | | | |
|---|---|-------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | | Page 4 of 35 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS908E**. The test data contained in this report pertains only to the emissions due to the EUT’s licensed transmitters that operate under the provisions of Part.

Test Device Serial No.: 1643M, 0722M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, Ultra Wideband



2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

| | | | | |
|---|---|-------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 5 of 35 | |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.



Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.



All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

| | | | |
|---|---|-------------------------------|--|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 6 of 35 |

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.20 |
| Radiated Disturbance (<1GHz) | 3.01 |
| Radiated Disturbance (>1GHz) | 5.56 |
| Radiated Disturbance (>18GHz) | 3.16 |

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 7 of 35 |

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|--------------|-------------------------------------|------------|--------------|------------|---------------|
| Agilent | E5515C | WIRELESS COMMUNICATION TEST SET | 2/19/2021 | Annual | 2/18/2022 | MY50262130 |
| Agilent | N9030A | PXA Signal Analyzer | 7/6/2021 | Annual | 7/5/2022 | MY49432391 |
| Anritsu | S820E | Cable and Antenna Analyzer | 7/7/2021 | Annual | 7/6/2022 | 6201300731 |
| Anritsu | MA24106A | USB Power Sensor | 7/7/2021 | Annual | 7/6/2022 | 1244512 |
| Anritsu | MA24106A | USB Power Sensor | 2/19/2021 | Annual | 2/18/2022 | 1344557 |
| Com-Power | AL-130 | 9kHz - 30MHz Loop Antenna | 10/29/2020 | Biennial | 10/28/2022 | 10160045 |
| Com-Power | PAM-118A | Preamplifier | 7/7/2021 | Annual | 7/6/2022 | 551042 |
| Espec | SH-242 | Environmental Chamber | 9/15/2021 | Annual | 9/14/2022 | 93011064 |
| ETS Lindgren | 3110C | Biconical Antenna | 7/9/2020 | Biennial | 7/8/2022 | 00211248 |
| ETS Lindgren | 3110C | Biconical Antenna | 7/9/2020 | Biennial | 7/8/2022 | 00211250 |
| Fairview Microwave | FM2CP1122-10 | Coupler | 7/7/2021 | Annual | 7/6/2022 | 1946 |
| Keysight Technologies | N9030B | MXA Signal Analyzer | 5/11/2021 | Annual | 5/10/2022 | MY57142018 |
| Mini Circuits | ZUDC10-83-S+ | Coupler | 9/15/2021 | Annual | 9/14/2022 | 2111 |
| Mini-Circuits | BW-N10W5+ | Attenuator | 7/6/2021 | Annual | 7/5/2022 | 1607 |
| Mini-Circuits | BW-N10W5+ | Attenuator | 7/6/2021 | Annual | 7/5/2022 | 1607 |
| Rohde & Schwarz | TS-PR18 | Preamplifier | 7/8/2021 | Annual | 7/7/2022 | 102141 |
| Rohde & Schwarz | SMBV100B | Signal Generator | 11/4/2021 | Annual | 11/3/2022 | 101568 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 7/6/2021 | Annual | 7/5/2022 | 116851 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 2/19/2021 | Annual | 2/18/2022 | 131453 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 2/19/2021 | Annual | 2/18/2022 | 131454 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 2/19/2021 | Annual | 2/18/2022 | 150117 |
| Rohde & Schwarz | ESW | EMI Test Receiver | 7/6/2021 | Annual | 7/5/2022 | 101761 |
| Rohde & Schwarz | FSW43 | Signal & Spectrum Analyzer | 9/15/2021 | Annual | 9/14/2022 | 101250 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 2/19/2021 | Annual | 2/18/2022 | 102131 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 3/29/2021 | Annual | 3/28/2022 | 102151 |
| Schwarzbeck | UHA9105 | Dipole Antenna | 7/9/2020 | Biennial | 7/8/2022 | 91052522 |
| Sunol | DRH-118 | Horn Antenna | 7/14/2021 | Biennial | 7/13/2023 | A102416-1 |
| Sunol | DRH-118 | Horn Antenna | 1/12/2021 | Biennial | 1/11/2023 | A060215 |

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 8 of 35 |

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

- LTE BW = 8.62 MHz
- G = Phase Modulation
- 7 = Quantized/Digital Info
- D = Data transmission, telemetry, telecommand

QAM Modulation



Emission Designator = 8M45W7D

- LTE BW = 8.45 MHz
- W = Amplitude/Angle Modulated
- 7 = Quantized/Digital Info
- D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

| | | | | |
|---|---|-------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 9 of 35 | |

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS908E
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

| Test Condition | Test Description | FCC Part Section(s) | Test Limit | Test Result | Reference |
|------------------|--|---------------------|--|-------------|-------------------|
| CONDUCTED | Occupied Bandwidth | 2.1049 | N/A | PASS | Section 7.2 |
| | Conducted Band Edge / Spurious Emissions (LTE Band 26) | 2.1051, 90.691(a) | > 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions except emissions beyond 37.5kHz from the block edge > 50 + 10 log ₁₀ (P[Watts]) at Band Edge and for all out- | PASS | Sections 7.3, 7.4 |
| | Frequency Stability | 2.1055, 90.213 | < 2.5 ppm | PASS | Section 7.8 |
| | Conducted Power | 2.1046, 90.635 | < 100 Watts | PASS | Section 7.5 |
| RADIATED | Effective Radiated Power (LTE Band 26) | 22.913(a)(2) | < 7 Watts max. ERP | PASS | Section 7.6 |
| | Radiated Spurious Emissions (LTE Band 26) | 2.1053, 90.691(a) | > 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions except emissions beyond 37.5kHz from the block edge > 50 + 10 log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge | PASS | Section 7.7 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

| | | | | |
|---|---|-------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | | Page 10 of 35 |

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 11 of 35 |

LTE Band 26




Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB)

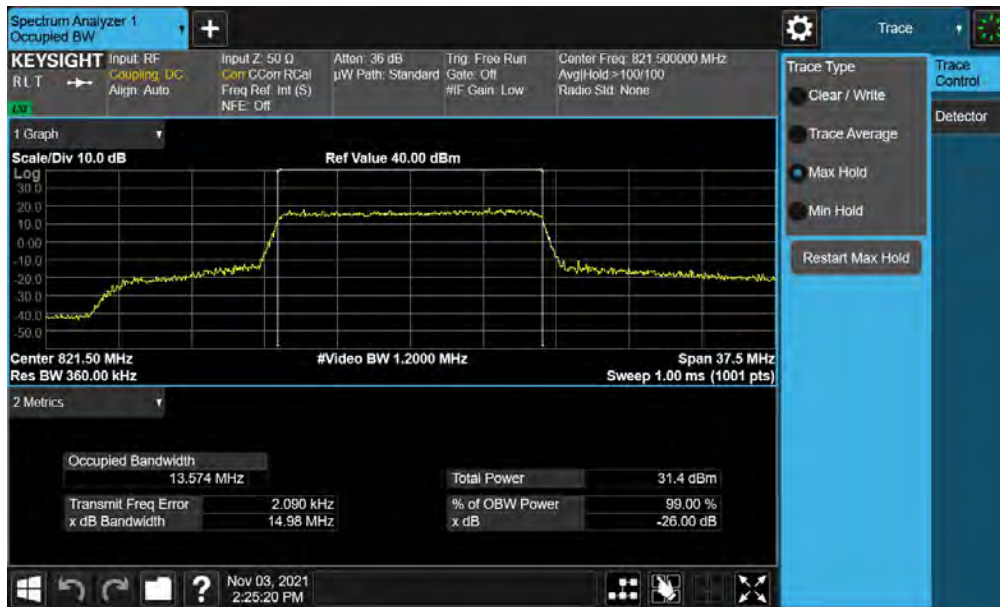

Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS908E | PART 90 MEASUREMENT REPORT | | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 12 of 35 |

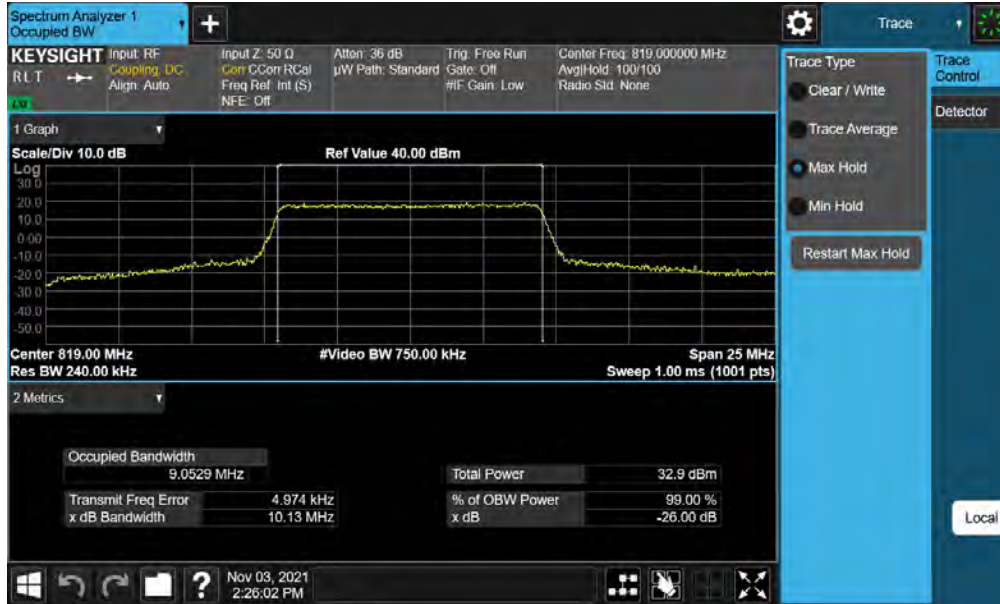

Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB)



Plot 7-4. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 13 of 35 |




Plot 7-5. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB)



Plot 7-6. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 14 of 35 |

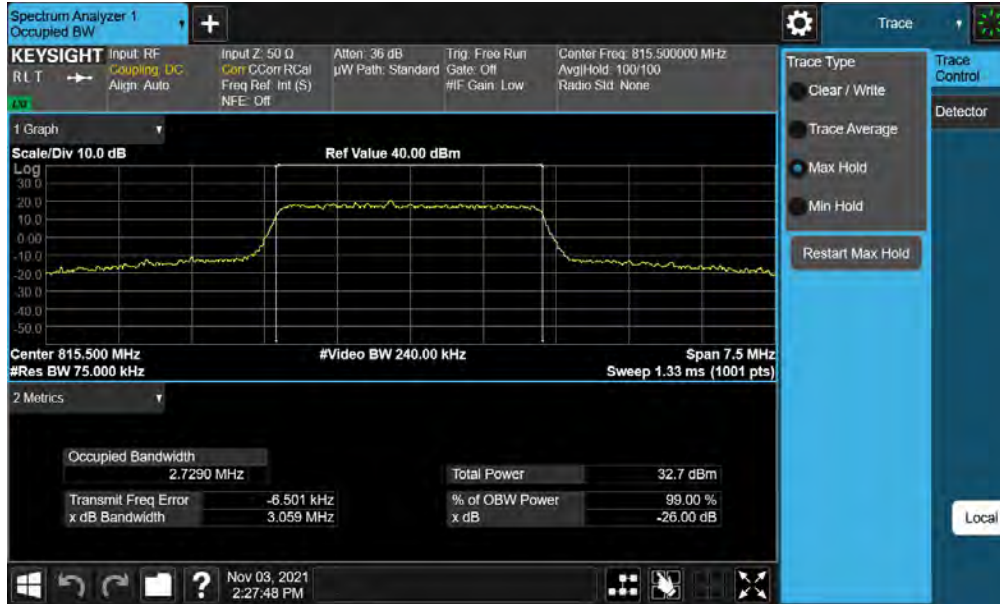

Plot 7-7. Occupied Bandwidth Plot (LTE Band 26 - 3MHz QPSK - Full RB)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 16-QAM - Full RB)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 15 of 35 |



Plot 7-9. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz QPSK - Full RB)



Plot 7-10. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 16-QAM - Full RB)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 16 of 35 |

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings



1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 100kHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 17 of 35 |

LTE Band 26

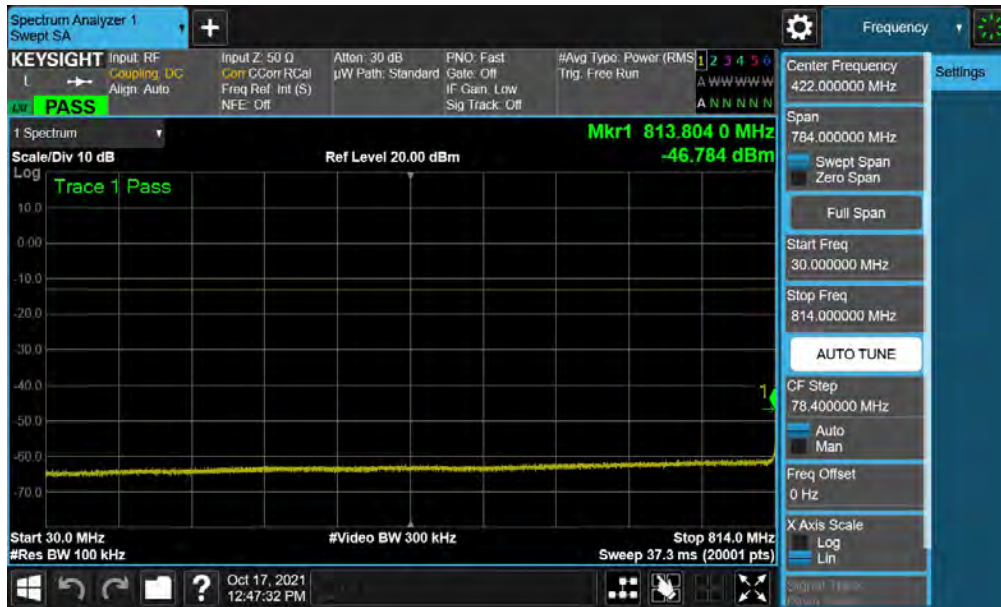

Plot 7-11. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0)



Plot 7-12. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0)

| | | | | |
|---|---------------------------------------|-------------------------------|--|-----------------------------------|
| FCC ID: A3LSMS908E | | PART 90 MEASUREMENT REPORT | | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | | Page 18 of 35 |



Plot 7-13. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS908E | PART 90 MEASUREMENT REPORT | | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 19 of 35 |

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee’s frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee’s frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings



1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





Figure 7-3. Test Instrument & Measurement Setup

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 20 of 35 |

Test Notes

For channel edge emission, the signal analyzer’s “ACP” measurement capability is used.


Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

| | | | |
|--|---|--------------------------------------|---|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 21 of 35 |

LTE Band 26




Plot 7-14. Channel Edge Plot (LTE Band 26 - 15MHz QPSK - Mid Channel)

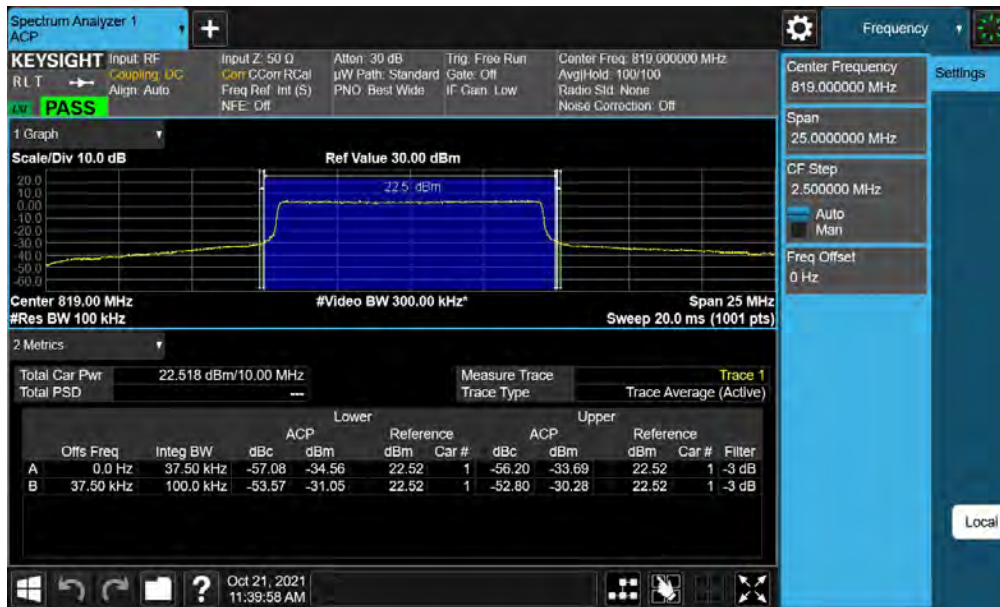

Plot 7-15. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Mid Channel)

| | | | |
|---|--|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST <small>Proved to be part of</small> | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 22 of 35 |

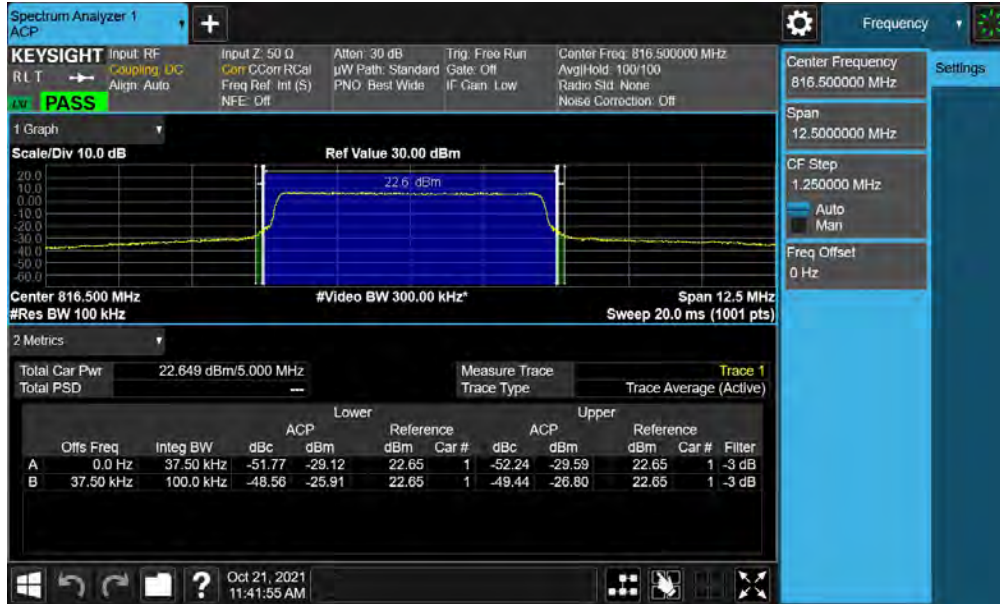

Plot 7-16. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Low Channel)




Plot 7-17. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - High Channel)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 23 of 35 |



Plot 7-18. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Low Channel)

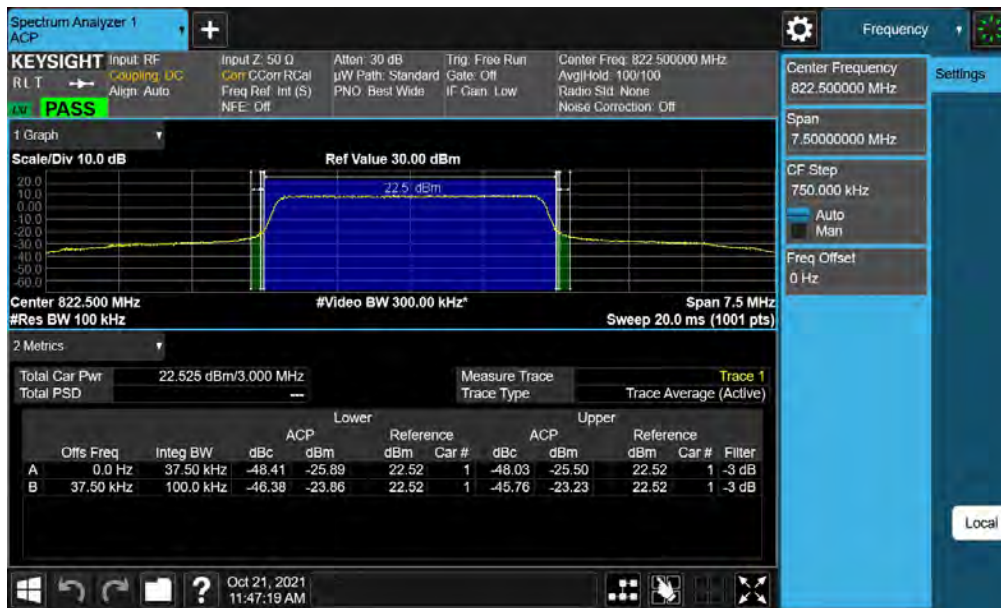

Plot 7-19. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - High Channel)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 24 of 35 |



Plot 7-20. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Low Channel)



Plot 7-21. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - High Channel)

| | | | |
|---|---------------------------------------|-----------------------------------|--|
| FCC ID: A3LSMS908E | PCTEST Proud to be part of | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 25 of 35 |

7.5 Conducted Power Output Data



§2.1046 §2.1046 §90.635

| Bandwidth | Modulation | Channel | Frequency [MHz] | RB Size/Offset | Conducted Power [dBm] | Conducted Power [Watts] | Conducted Power Limit [dBm] | Margin [dB] |
|-----------|------------|---------|-----------------|----------------|-----------------------|-------------------------|-----------------------------|-------------|
| 15 MHz | QPSK | 26765 | 821.5 | 1 / 37 | 24.56 | 0.286 | 50.00 | -25.44 |
| | 16-QAM | 26765 | 821.5 | 1 / 0 | 23.88 | 0.244 | 50.00 | -26.12 |
| | 64-QAM | 26765 | 821.5 | 1 / 37 | 22.78 | 0.190 | 50.00 | -27.22 |
| | 256-QAM | 26765 | 821.5 | 1 / 0 | 19.63 | 0.092 | 50.00 | -30.37 |
| 10 MHz | QPSK | 26740 | 819.0 | 1 / 0 | 24.79 | 0.302 | 50.00 | -25.21 |
| | 16-QAM | 26740 | 819.0 | 1 / 0 | 24.24 | 0.266 | 50.00 | -25.76 |
| | 64-QAM | 26740 | 819.0 | 1 / 0 | 23.25 | 0.211 | 50.00 | -26.75 |
| | 256-QAM | 26740 | 819.0 | 1 / 25 | 19.58 | 0.091 | 50.00 | -30.42 |
| 5 MHz | QPSK | 26715 | 816.5 | 1 / 12 | 24.91 | 0.310 | 50.00 | -25.09 |
| | | 26765 | 821.5 | 1 / 12 | 24.76 | 0.299 | 50.00 | -25.24 |
| | 16-QAM | 26715 | 816.5 | 1 / 0 | 23.95 | 0.249 | 50.00 | -26.05 |
| | | 26765 | 821.5 | 1 / 12 | 23.97 | 0.249 | 50.00 | -26.03 |
| | 64-QAM | 26715 | 816.5 | 1 / 12 | 23.19 | 0.208 | 50.00 | -26.81 |
| | | 26765 | 821.5 | 1 / 0 | 23.06 | 0.202 | 50.00 | -26.94 |
| | 256-QAM | 26715 | 816.5 | 1 / 12 | 19.65 | 0.092 | 50.00 | -30.35 |
| | | 26765 | 821.5 | 1 / 0 | 19.35 | 0.086 | 50.00 | -30.65 |
| 3 MHz | QPSK | 26705 | 815.5 | 1 / 7 | 24.91 | 0.310 | 50.00 | -25.09 |
| | | 26775 | 822.5 | 1 / 0 | 24.66 | 0.292 | 50.00 | -25.34 |
| | 16-QAM | 26705 | 815.5 | 1 / 14 | 24.21 | 0.264 | 50.00 | -25.79 |
| | | 26775 | 822.5 | 1 / 7 | 23.94 | 0.248 | 50.00 | -26.06 |
| | 64-QAM | 26705 | 815.5 | 1 / 7 | 23.07 | 0.203 | 50.00 | -26.93 |
| | | 26775 | 822.5 | 1 / 7 | 22.93 | 0.196 | 50.00 | -27.07 |
| | 256-QAM | 26705 | 815.5 | 1 / 0 | 19.57 | 0.091 | 50.00 | -30.43 |
| | | 26775 | 822.5 | 1 / 7 | 19.20 | 0.083 | 50.00 | -30.80 |
| 1.4 MHz | QPSK | 26697 | 814.7 | 1 / 0 | 24.90 | 0.309 | 50.00 | -25.10 |
| | | 26783 | 823.3 | 1 / 0 | 24.44 | 0.278 | 50.00 | -25.56 |
| | 16-QAM | 26697 | 814.7 | 1 / 5 | 24.16 | 0.260 | 50.00 | -25.84 |
| | | 26783 | 823.3 | 1 / 0 | 23.98 | 0.250 | 50.00 | -26.02 |
| | 64-QAM | 26697 | 814.7 | 1 / 3 | 23.09 | 0.204 | 50.00 | -26.91 |
| | | 26783 | 823.3 | 1 / 3 | 22.70 | 0.186 | 50.00 | -27.30 |
| | 256-QAM | 26697 | 814.7 | 1 / 3 | 19.74 | 0.094 | 50.00 | -30.26 |
| | | 26783 | 823.3 | 1 / 3 | 19.77 | 0.095 | 50.00 | -30.23 |

Table 7-2. Conducted Power Output Data (LTE Band 26)

NOTES:

- For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
- This unit was tested with its standard battery.

| | | | | |
|---|---|-------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | | Page 26 of 35 |

7.6 Radiated Power (ERP)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.


Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 27 of 35 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

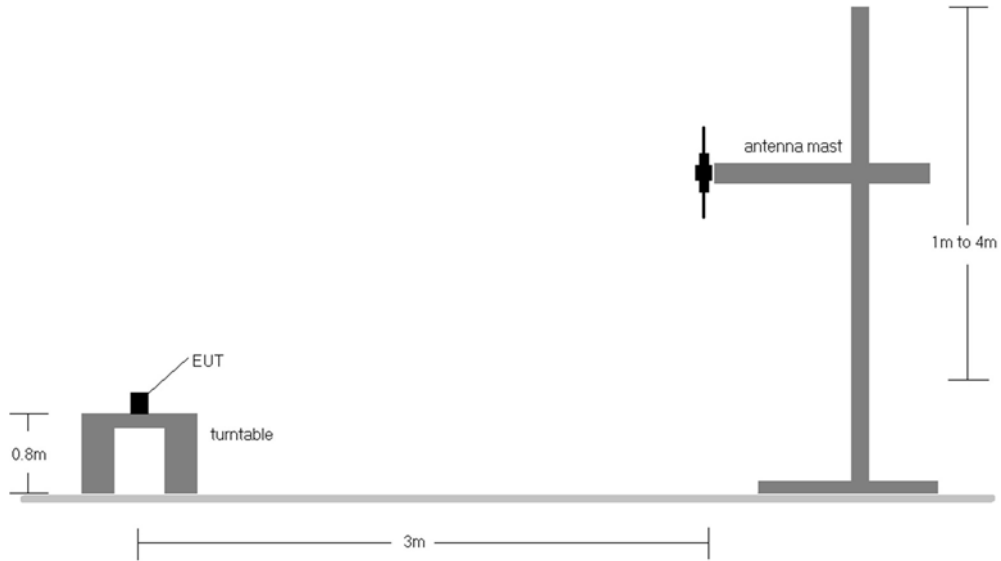


Figure 7-4. Radiated Test Setup <1GHz



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

| | | | |
|--|--|--------------------------------------|--|
| FCC ID: A3LSMS908E | | PART 90 MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 28 of 35 |

| Bandwidth | Mod. | Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Ant. Gain [dBi] | RB Size/Offset | Substitute Level [dBm] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------|------------|-----------------|-----------------|---------------------|----------------------------|-----------------|----------------|------------------------|-----------|-------------|-----------------|-------------|
| 15 MHz | QPSK | 821.5 | V | 135 | 80 | 1.24 | 1 / 74 | 18.48 | 17.57 | 0.057 | 38.45 | -20.88 |
| | 16-QAM | 821.5 | V | 135 | 80 | 1.24 | 1 / 74 | 17.03 | 16.12 | 0.041 | 38.45 | -22.33 |
| 1.4 MHz | QPSK (WCP) | 821.5 | V | 126 | 83 | 1.24 | 1 / 5 | 14.21 | 13.30 | 0.021 | 38.45 | -25.15 |

Table 7-3. ERP Data (LTE Band 26)

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 29 of 35 |

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

| | | | |
|--|---|--------------------------------------|---|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 30 of 35 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

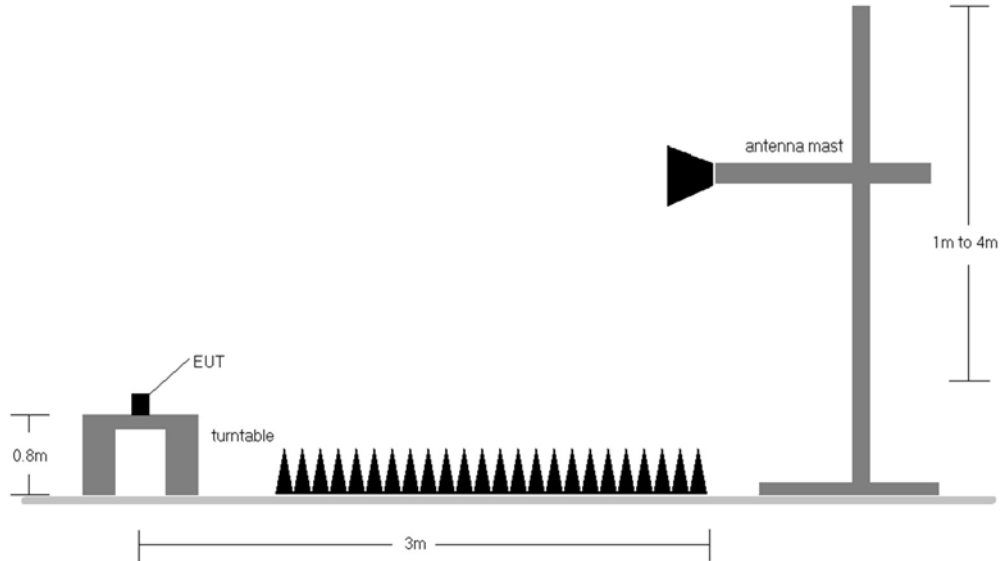





Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a. $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b. $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log D - 104.8$; where D is the measurement distance in meters.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 31 of 35 |

LTE Band 26

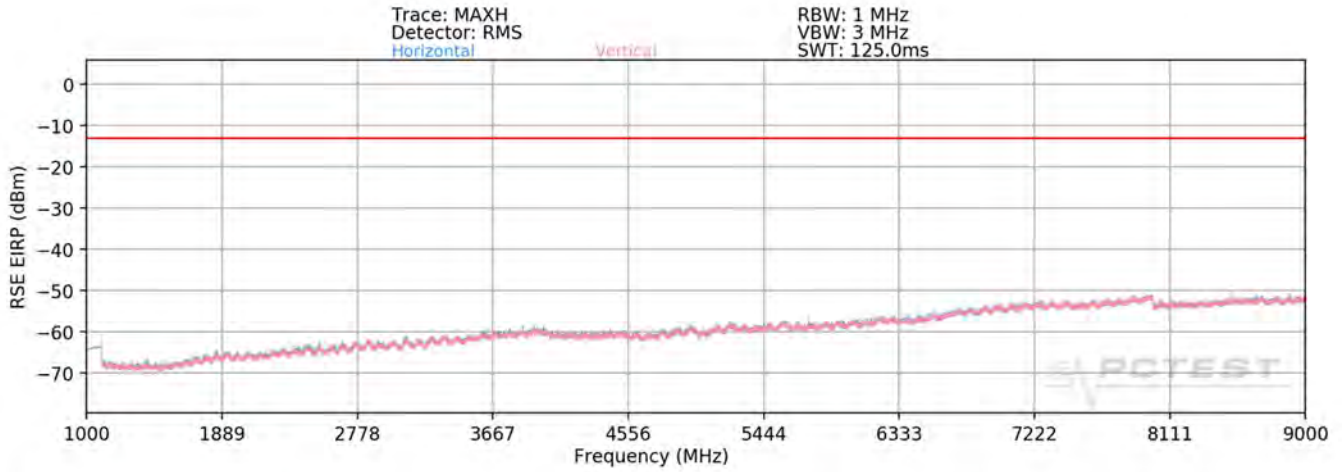



Plot 7-22. Radiated Spurious Plot (LTE Band 26)

| | |
|----------------------------|--------|
| Bandwidth (MHz): | 15 |
| Frequency (MHz): | 821.5 |
| Modulation Signal: | QPSK |
| RB Config (Size / Offset): | 1 / 37 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 1643.00 | V | - | - | -75.11 | -7.55 | 24.34 | -70.92 | -13.00 | -57.92 |
| 2464.50 | V | - | - | -75.64 | -4.01 | 27.35 | -67.91 | -13.00 | -54.91 |
| 3286.00 | V | - | - | -76.35 | -0.82 | 29.83 | -65.43 | -13.00 | -52.43 |
| 4107.50 | V | - | - | -77.02 | 1.18 | 31.16 | -64.09 | -13.00 | -51.09 |

Table 7-4. Radiated Spurious Data (LTE Band 26 – Mid Channel)

| | | | | |
|---|---|-----------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS908E |  | PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | | Page 32 of 35 |

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 33 of 35 |



LTE Band 26

| LTE Band 26 | | | | | |
|---------------------------|-------------|-----------------------|----------------|-----------------|---------------|
| Operating Frequency (Hz): | | 819,000,000 | | | |
| Ref. Voltage (VDC): | | 4.39 | | | |
| Deviation Limit: | | ± 0.00025% or 2.5 ppm | | | |
| Voltage (%) | Power (VDC) | Temp (°C) | Frequency (Hz) | Freq. Dev. (Hz) | Deviation (%) |
| 100 % | 4.39 | - 30 | 819,000,328 | 189 | 0.0000230 |
| | | - 20 | 819,000,055 | -85 | -0.0000104 |
| | | - 10 | 818,999,941 | -199 | -0.0000242 |
| | | 0 | 818,999,061 | -1,079 | -0.0001317 |
| | | + 10 | 819,000,060 | -80 | -0.0000097 |
| | | + 20 (Ref) | 819,000,140 | 0 | 0.0000000 |
| | | + 30 | 819,000,029 | -111 | -0.0000135 |
| | | + 40 | 819,001,034 | 895 | 0.0001092 |
| | | + 50 | 819,000,780 | 641 | 0.0000782 |
| Battery Endpoint | 3.80 | + 20 | 819,001,494 | 1,355 | 0.0001654 |

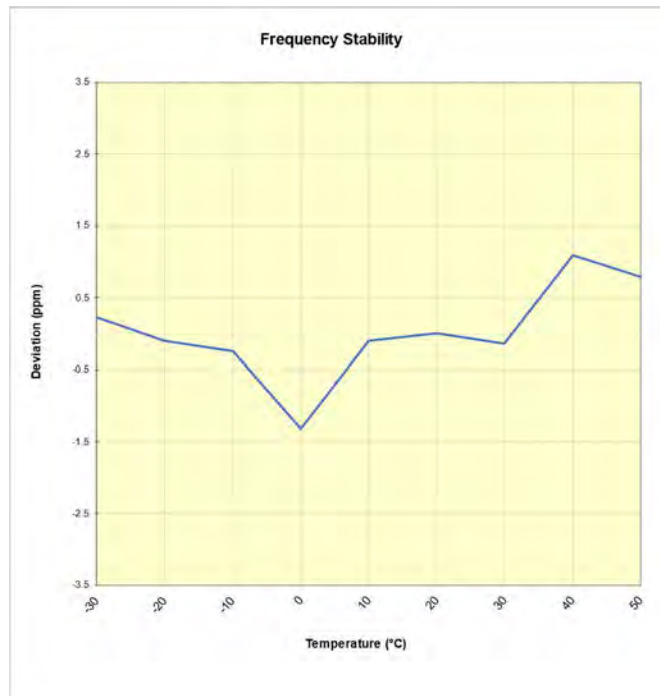Table 7-5. LTE Band 26 Frequency Stability Data





Plot 7-23. LTE Band 26 Frequency Stability Chart

| | | | |
|---|--|---|-----------------------------------|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset | Page 34 of 35 |

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS908E** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

| | | |
|--|---|--|
| FCC ID: A3LSMS908E |  PART 90 MEASUREMENT REPORT  | Approved by: Technical Manager |
| Test Report S/N: 1M2109220110-06.A3L | Test Dates: 10/8/2021 - 11/10/2021 | EUT Type: Portable Handset |
| Page 35 of 35 | | |