

MEASUREMENT REPORT FCC Part 15F ULTRA WIDEBAND

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 10/5 – 12/16/2022
Test Report Issue Date:
 12/16/2022
Test Site/Location:
 Element Lab. Yongin-Si, Gyeonggi-do, South Korea
Test Report Serial No.:
 1M2212080137-08-R1.A3L

FCC ID:	A3LSMS918JPN
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model(s): SC-52D, SCG20
EUT Type: Portable Handset
FCC Classification: Ultra Wideband (UWB)
FCC Rule Parts(s): FCC Part 15 Subpart F (15.519, 15.521)
UWB Classification: Hand-held Communication Device
Test Procedure(s): ANSI C63.10-2013, KDB 393764 D01


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.10-2013 (See Test Report). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2212080137-08-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 1 of 82



TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
2.5	Antenna Description.....	4
2.6	Software and Firmware.....	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure.....	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	Antenna Requirements	7
5.0	Measurement Uncertainty	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	10dBc Bandwidth Measurement.....	11
7.3	Cessation Time.....	44
7.4	Peak Power and Maximum Average Emissions	46
7.5	Radiated Measurement Data above 960MHz.....	57
7.6	Radiated Spurious Emissions Measurements – Below 1GHz.....	71
7.7	Line Conducted Measurement Data	76
8.0	CONCLUSION	82

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 2 of 82

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 3 of 82

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS918JPN**. The test data contained in this report pertains only to the EUT's ultra-wideband transmitter.

Test Device Serial No.: 0119M, 0962M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, UWB, Wireless Power Transfer.

2.3 Test Configuration

The EUT was tested per the guidance of Section 10 of ANSI C63.10-2013. The EUT setup procedures of ANSI C63.10-2013 were used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Section 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, respectively.

The Equipment Under Test (EUT) was capable of operating on two antennas in two separate modes [HPRF, preamble 27] and [BPRF, preamble 9~12]. Care was taken to ensure the worst-case modes were investigated and reported.

For more information, please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain [dBi]	Antenna 2 Gain [dBi]
6.5	-5.4	-4.2
8.0	-4.8	-4.9

Table 2-1. Maximum Peak Antenna Gain

2.6 Software and Firmware

The test was conducted with firmware version N795OMU0AVL2 installed on the EUT.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 4 of 82

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by SY cooperation RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the R&S ESW was used to perform AC line conducted emissions testing. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 5 of 82

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 6 of 82

4.0 ANTENNA REQUIREMENTS

Except from §15.203 of the FCC Rules/Regulations:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are permanently attached
- There are no provisions for a connection to an external antenna

The EUT complies with the requirements of §15.203.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 7 of 82

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Disturbance	1.60
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	3.08

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 8 of 82

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
COM-Power Corporation	AL-130R	Active Loop Antenna(9kHz-30MHz)	2022-10-21	Biennial	2024-10-20	10160045
Schwarzbeck	VULB9162	Broadband TRILOG Antenna(30MHz-1GHz)	2021-07-13	Biennial	2023-07-12	9162-217
Sunol Sciences	DRH-118	Horn Antenna(1GHz-18GHz)	2021-01-12	Biennial	2023-01-11	A060215
NARDA	180-442A-KF	Horn Antenna(18GHz-40GHz)	2022-11-23	Biennial	2024-11-22	T058701-03
Agilent	N9030A	PXA Signal Analyzer(3Hz-26.5GHz)	2022-07-04	Annual	2023-07-03	MY49432391
Rohde & Schwarz	ESW	EMI Test Receiver(2Hz-44GHz)	2022-07-04	Annual	2023-07-03	101761
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer(2Hz-43.5GHz)	2022-01-18	Annual	2023-01-17	101955
Anritsu	S820E	Cable and Antenna Analyzer	2022-07-06	Annual	2023-07-05	1839097
Anritsu	TOSLKF50A-40	Calibration Kit	N/A	-	N/A	1825024
Rohde & Schwarz	ENV216	Two-Line V-Network	2022-05-09	Annual	2023-05-08	101319
TESTEK	-	LISN Extension Cord	2022-05-09	Annual	2023-05-08	N/A
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	2022-03-02	Annual	2023-03-01	102131
Rohde & Schwarz	TS-PR1840	Preamplifier(18GHz-40GHz)	2022-07-06	Annual	2023-07-05	100049
MINI-CIRCUITS	BW-N10W5+	ATTENUATOR(DC-18GHz)	2022-05-09	Annual	2023-05-08	2106

Table 6-1. Test Equipment Calibration Schedule

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 9 of 82

7.0 TEST DATA

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS918JPN
 FCC Classification: Ultra-Wideband (UWB)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference	
§15.503, §15.519 (b)	10dBc Bandwidth	≥ 500MHz	RADIATED	PASS	Section 7.2	
§15.519(a)(1)	Cessation Time	Transmission shall cease in less than 10s		PASS		Section 7.3
§15.519(e)	Maximum Peak Power	< 0dBm EIRP in 50MHz BW				Section 7.4
§15.519(c)	Maximum Average Emission in the range of 3100 – 10600 MHz	< -41.3 EIRP in dBm				Section 7.4
§15.519(c)	Radiated Emissions Above 960MHz	See table in 15.519(c) for details				Section 7.4, 7.5
§15.519(d)	Radiated Emissions in the 1164 – 1240Mhz and 1559 – 1610MHz GPS Bands	< -85.3 EIRP in dBm				Section 7.5
§15.519(c), §15.519(a)	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209				Section 7.6
§15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.7	

Table 7-1. Summary of Test Results

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 10 of 82

7.2 10dBc Bandwidth Measurement

§15.503(a), §15.519(b)

Test Overview and Limit

Per the definition of 15.503, the UWB Bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

The 10dB bandwidth of the UWB signal must remain fully within the 3100 – 10,600MHz band. The 10dB bandwidth of the UWB signal must also be greater than or equal to 500MHz.

Test Procedures Used

ANSI C63.10-2013 Section 10.1

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Span was set wide enough to capture the 10dB points of the signal
5. Trace mode = max hold
6. Sweep = 2s
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument and Measurement Setup

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 11 of 82

Frequency [GHz]	Channel	Preamble ID	Config	Mode	F _M [GHz]	F _L [GHz]	F _H [GHz]	F _c [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
6.5	5	9	SP0	BPRF	6.645	6.239	6.769	6.504	529.77	500	Pass
		9	SP1	BPRF	6.646	6.240	6.770	6.505	529.77	500	Pass
		9	SP3	BPRF	6.727	6.228	6.770	6.499	542.70	500	Pass
		10	SP0	BPRF	6.646	6.233	6.760	6.497	527.18	500	Pass
		10	SP1	BPRF	6.645	6.234	6.758	6.496	524.59	500	Pass
		10	SP3	BPRF	6.717	6.238	6.770	6.504	532.36	500	Pass
		11	SP0	BPRF	6.713	6.263	6.768	6.515	504.75	500	Pass
		11	SP1	BPRF	6.713	6.262	6.768	6.515	505.61	500	Pass
		11	SP3	BPRF	6.717	6.239	6.770	6.504	530.63	500	Pass
		12	SP0	BPRF	6.712	6.248	6.769	6.509	520.27	500	Pass
		12	SP1	BPRF	6.712	6.244	6.770	6.507	525.45	500	Pass
		12	SP3	BPRF	6.717	6.242	6.767	6.504	525.45	500	Pass
		27	SP0	HPRF	6.732	6.248	6.761	6.504	513.38	500	Pass
		27	SP1	HPRF	6.731	6.248	6.763	6.506	514.24	500	Pass
		27	SP3	HPRF	6.707	6.248	6.771	6.509	523.73	500	Pass
8.0	9	9	SP0	BPRF	8.143	7.724	8.270	7.997	546.16	500	Pass
		9	SP1	BPRF	8.143	7.724	8.268	7.996	543.57	500	Pass
		9	SP3	BPRF	8.225	7.717	8.272	7.994	554.78	500	Pass
		10	SP0	BPRF	8.178	7.729	8.258	7.994	528.91	500	Pass
		10	SP1	BPRF	8.176	7.729	8.296	8.013	566.87	500	Pass
		10	SP3	BPRF	8.215	7.718	8.276	7.997	558.24	500	Pass
		11	SP0	BPRF	8.212	7.727	8.267	7.997	539.26	500	Pass
		11	SP1	BPRF	8.211	7.726	8.268	7.997	541.84	500	Pass
		11	SP3	BPRF	8.225	7.716	8.271	7.994	554.79	500	Pass
		12	SP0	BPRF	8.178	7.722	8.274	7.998	552.20	500	Pass
		12	SP1	BPRF	8.178	7.720	8.270	7.995	550.48	500	Pass
		12	SP3	BPRF	8.215	7.716	8.288	8.002	572.27	500	Pass
		27	SP0	HPRF	8.229	7.721	8.261	7.991	540.12	500	Pass
		27	SP1	HPRF	8.229	7.721	8.272	7.997	550.48	500	Pass
		27	SP3	HPRF	8.205	7.718	8.273	7.995	554.79	500	Pass

Table 7-2. UWB 10dBc Bandwidth Summary [ANT 1]

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 12 of 82

10dBc Bandwidth Results



Plot 7-1. 10dBc Bandwidth – CH.5 - SP0 – Preamble 9



Plot 7-2. 10dBc Bandwidth – CH.5 – SP1 – Preamble 9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 13 of 82



Plot 7-3. 10dBc Bandwidth – CH.5 – SP3 – Preamble 9




Plot 7-4. 10dBc Bandwidth – CH.5 - SP0 – Preamble 10

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 14 of 82



Plot 7-5. 10dBc Bandwidth – CH.5 – SP1 – Preamble 10

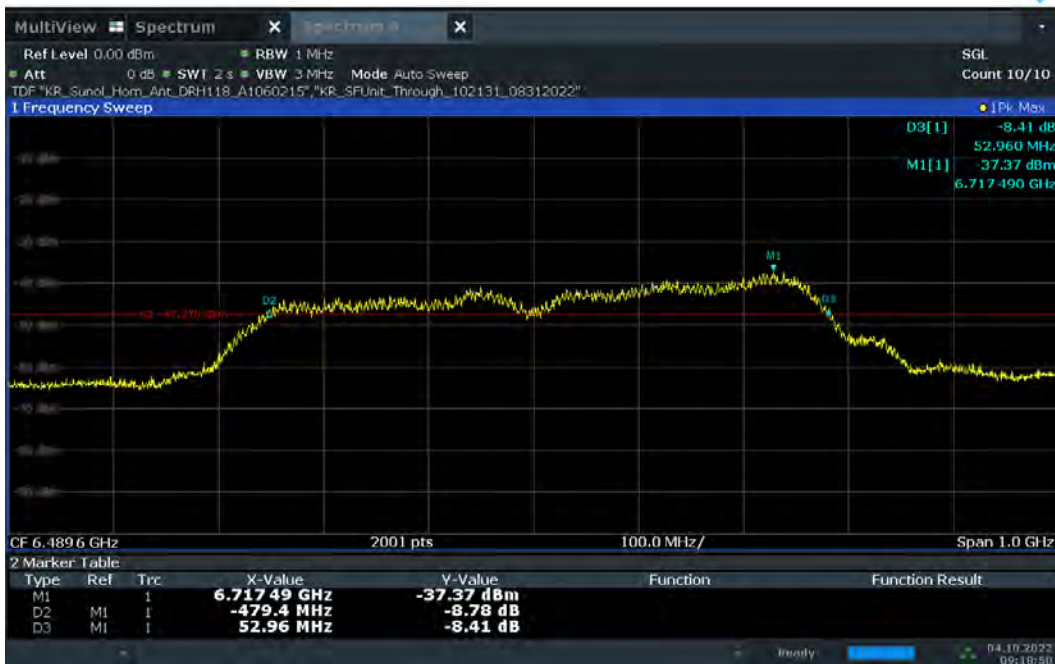

Plot 7-6. 10dBc Bandwidth – CH.5 – SP3 – Preamble 10

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 15 of 82




Plot 7-7. 10dBc Bandwidth – CH.5 - SP0 – Preamble 11



Plot 7-8. 10dBc Bandwidth – CH.5 – SP1 – Preamble 11

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 16 of 82

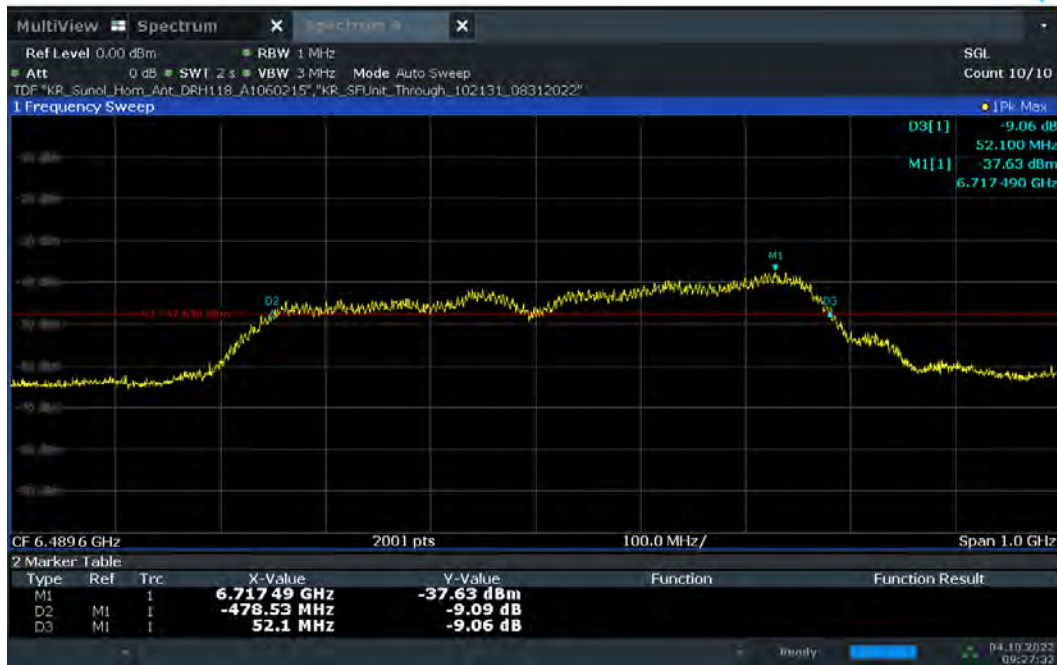

Plot 7-9. 10dBc Bandwidth – CH.5 – SP3 – Preamble 11



Plot 7-10. 10dBc Bandwidth – CH.5 - SP0 – Preamble 12

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 17 of 82



Plot 7-11. 10dBc Bandwidth – CH.5 – SP1 – Preamble 12




Plot 7-12. 10dBc Bandwidth – CH.5 – SP3 – Preamble 12

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 18 of 82




Plot 7-13. 10dBc Bandwidth – CH.5 - SP0 – Preamble 27

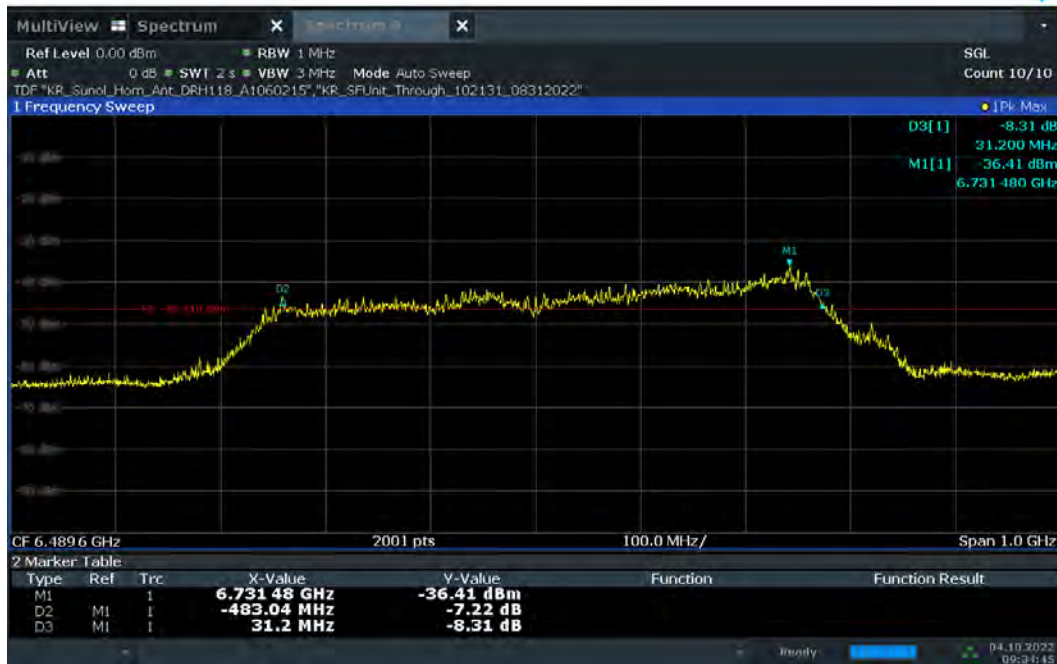

Plot 7-14. 10dBc Bandwidth – CH.5 – SP1 – Preamble 27

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 19 of 82

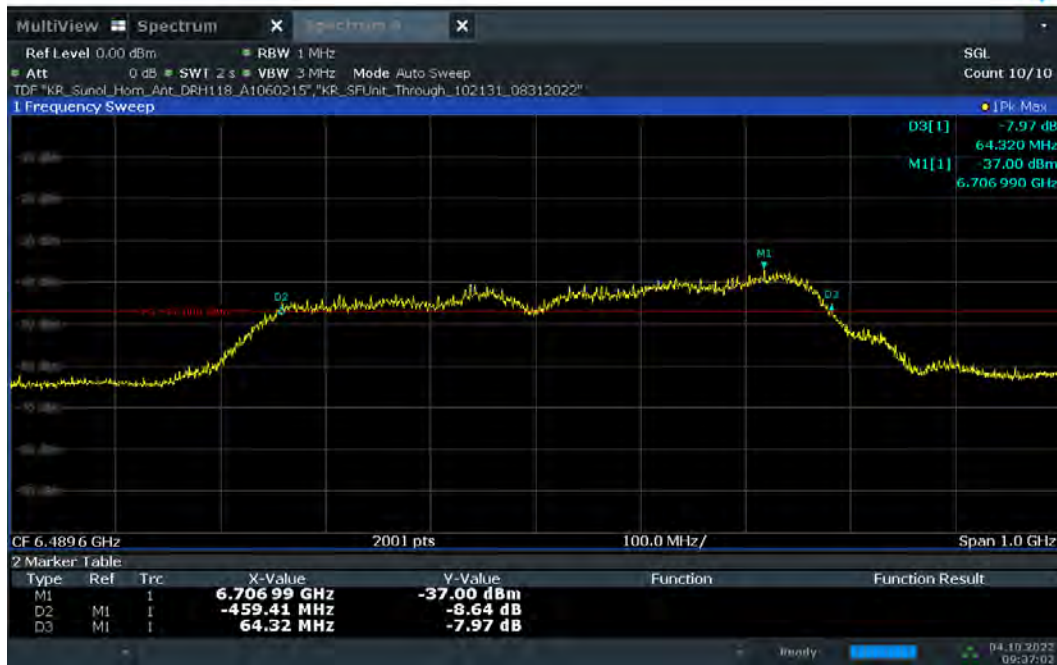

Plot 7-15. 10dBc Bandwidth – CH.5 – SP3 – Preamble 27



Plot 7-16. 10dBc Bandwidth – CH.9 - SP0 – Preamble 9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 20 of 82



Plot 7-17. 10dBc Bandwidth – CH.9 – SP1 – Preamble 9



Plot 7-18. 10dBc Bandwidth – CH.9 – SP3 – Preamble 9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 21 of 82



Plot 7-19. 10dBc Bandwidth – CH.9 - SP0 – Preamble 10



Plot 7-20. 10dBc Bandwidth – CH.9 – SP1 – Preamble 10

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 22 of 82



Plot 7-21. 10dBc Bandwidth – CH.9 – SP3 – Preamble 10



Plot 7-22. 10dBc Bandwidth – CH.9 - SP0 – Preamble 11

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 23 of 82



Plot 7-23. 10dBc Bandwidth – CH.9 – SP1 – Preamble 11



Plot 7-24. 10dBc Bandwidth – CH.9 – SP3 – Preamble 11

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 24 of 82



Plot 7-25. 10dBc Bandwidth – CH.9 - SP0 – Preamble 12



Plot 7-26. 10dBc Bandwidth – CH.9 – SP1 – Preamble 12

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 25 of 82



Plot 7-27. 10dBc Bandwidth – CH.9 – SP3 – Preamble 12



Plot 7-28. 10dBc Bandwidth – CH.9 - SP0 – Preamble 27

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 26 of 82



Plot 7-29. 10dBc Bandwidth – CH.9 – SP1 – Preamble 27



Plot 7-30. 10dBc Bandwidth – CH.9 – SP3 – Preamble 27

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 27 of 82

Frequency [GHz]	Channel	Preamble ID	Config	Mode	F _M [GHz]	F _L [GHz]	F _H [GHz]	F _c [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
6.5	5	9	SP0	BPRF	6.455	6.235	6.745	6.490	510.79	500	Pass
		9	SP1	BPRF	6.455	6.234	6.745	6.489	510.78	500	Pass
		9	SP3	BPRF	6.439	6.234	6.745	6.489	511.15	500	Pass
		10	SP0	BPRF	6.491	6.236	6.743	6.489	507.34	500	Pass
		10	SP1	BPRF	6.692	6.437	6.944	6.691	506.48	500	Pass
		10	SP3	BPRF	6.439	6.234	6.745	6.490	511.65	500	Pass
		11	SP0	BPRF	6.462	6.235	6.745	6.490	510.79	500	Pass
		11	SP1	BPRF	6.439	6.234	6.745	6.490	511.65	500	Pass
		11	SP3	BPRF	6.439	6.235	6.745	6.490	510.29	500	Pass
		12	SP0	BPRF	6.429	6.234	6.745	6.490	511.64	500	Pass
		12	SP1	BPRF	6.449	6.234	6.745	6.490	511.64	500	Pass
		12	SP3	BPRF	6.439	6.234	6.745	6.490	511.65	500	Pass
		27	SP0	HPRF	6.420	6.229	6.747	6.488	517.68	500	Pass
		27	SP1	HPRF	6.427	6.231	6.746	6.489	515.10	500	Pass
		27	SP3	HPRF	6.427	6.236	6.743	6.489	507.33	500	Pass
8.0	9	9	SP0	BPRF	8.023	7.731	8.243	7.987	511.15	500	Pass
		9	SP1	BPRF	8.022	7.731	8.242	7.987	510.79	500	Pass
		9	SP3	BPRF	8.048	7.724	8.243	7.984	518.55	500	Pass
		10	SP0	BPRF	7.988	7.734	8.241	7.988	507.25	500	Pass
		10	SP1	BPRF	7.988	7.734	8.241	7.988	507.34	500	Pass
		10	SP3	BPRF	8.019	7.724	8.242	7.983	517.96	500	Pass
		11	SP0	BPRF	8.013	7.731	8.243	7.987	511.65	500	Pass
		11	SP1	BPRF	8.016	7.726	8.242	7.984	516.19	500	Pass
		11	SP3	BPRF	8.048	7.729	8.242	7.985	513.37	500	Pass
		12	SP0	BPRF	8.066	7.729	8.243	7.986	514.23	500	Pass
		12	SP1	BPRF	8.067	7.725	8.243	7.984	517.68	500	Pass
		12	SP3	BPRF	8.048	7.729	8.243	7.986	514.23	500	Pass
		27	SP0	HPRF	8.057	7.727	8.241	7.984	514.23	500	Pass
		27	SP1	HPRF	8.050	7.726	8.242	7.984	515.96	500	Pass
		27	SP3	HPRF	8.050	7.728	8.241	7.985	513.37	500	Pass

Table 7-3. UWB 10dBc Bandwidth Summary [ANT 2]

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 28 of 82

10dBc Bandwidth Results



Plot 7-31. 10dBc Bandwidth – CH.5 - SP0 – Preamble 9



Plot 7-32. 10dBc Bandwidth – CH.5 – SP1 – Preamble 9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 29 of 82



Plot 7-33. 10dBc Bandwidth – CH.5 – SP3 – Preamble 9




Plot 7-34. 10dBc Bandwidth – CH.5 - SP0 – Preamble 10

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 30 of 82



Plot 7-35. 10dBc Bandwidth – CH.5 – SP1 – Preamble 10

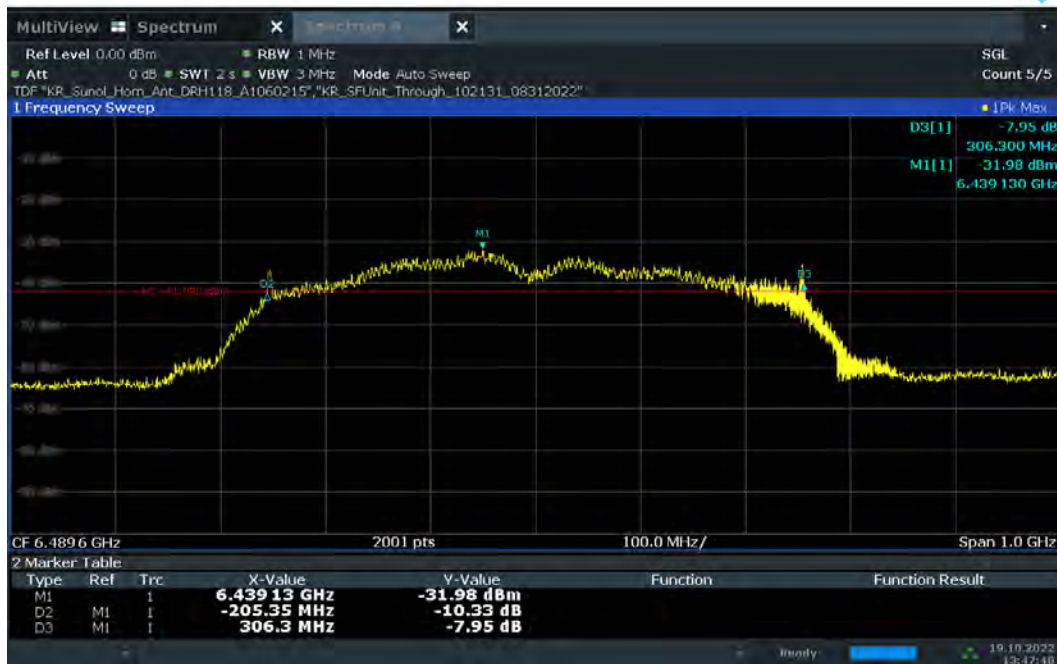

Plot 7-36. 10dBc Bandwidth – CH.5 – SP3 – Preamble 10

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 31 of 82




Plot 7-37. 10dBc Bandwidth – CH.5 - SP0 – Preamble 11



Plot 7-38. 10dBc Bandwidth – CH.5 – SP1 – Preamble 11

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 32 of 82

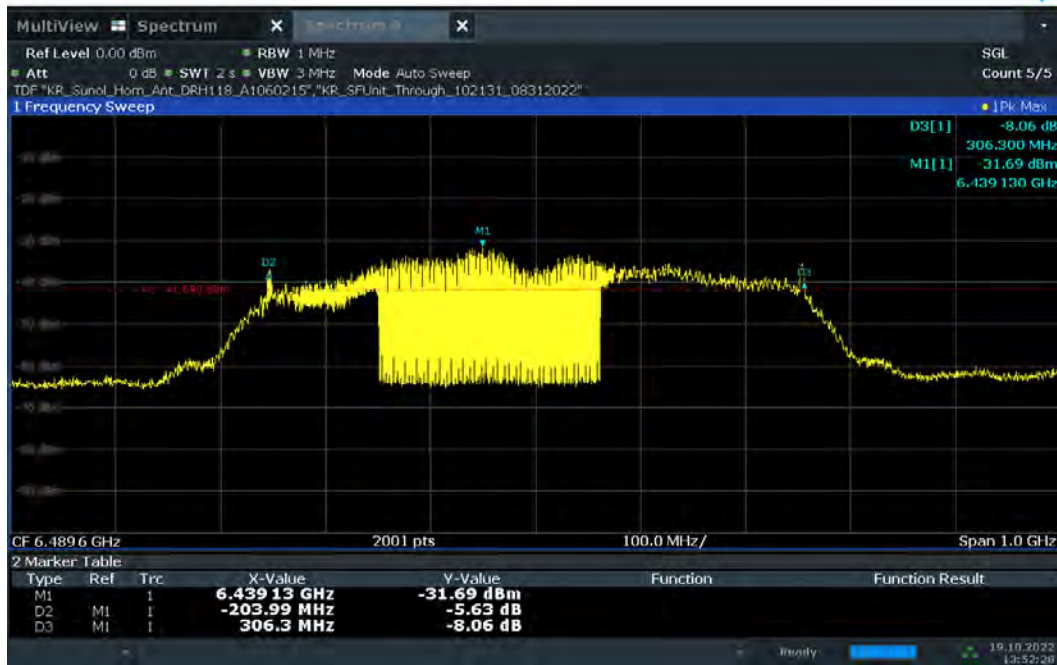


Plot 7-39. 10dBc Bandwidth – CH.5 – SP3 – Preamble 11




Plot 7-40. 10dBc Bandwidth – CH.5 - SP0 – Preamble 12

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 33 of 82

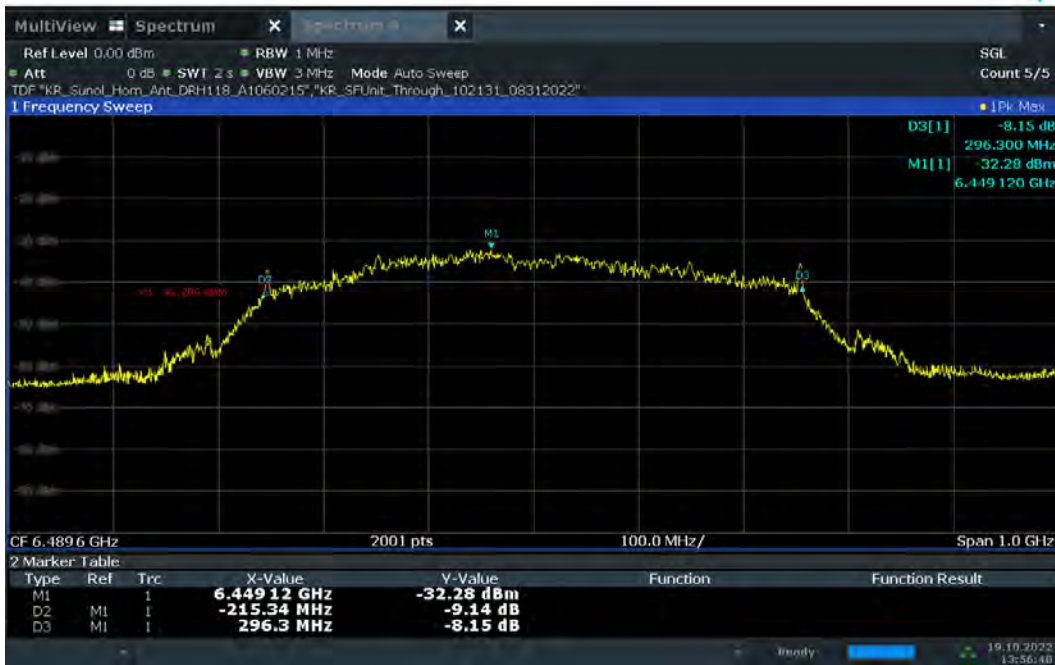


Plot 7-41. 10dBc Bandwidth – CH.5 – SP1 – Preamble 12

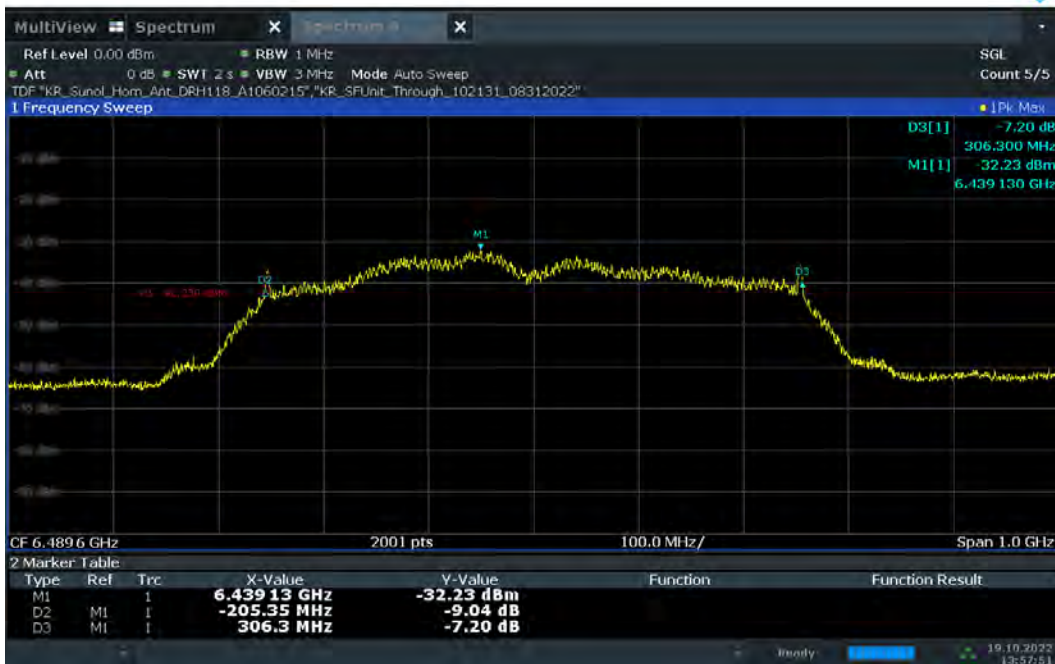


Plot 7-42. 10dBc Bandwidth – CH.5 – SP3 – Preamble 12

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 34 of 82

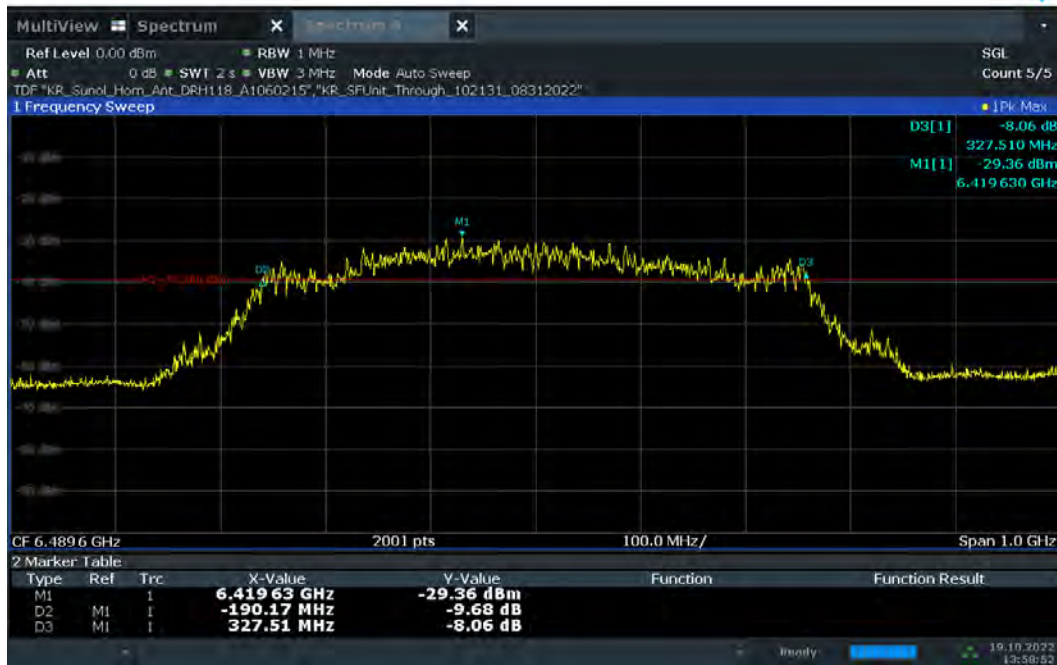


Plot 7-43. 10dBc Bandwidth – CH.5 - SP0 – Preamble 27

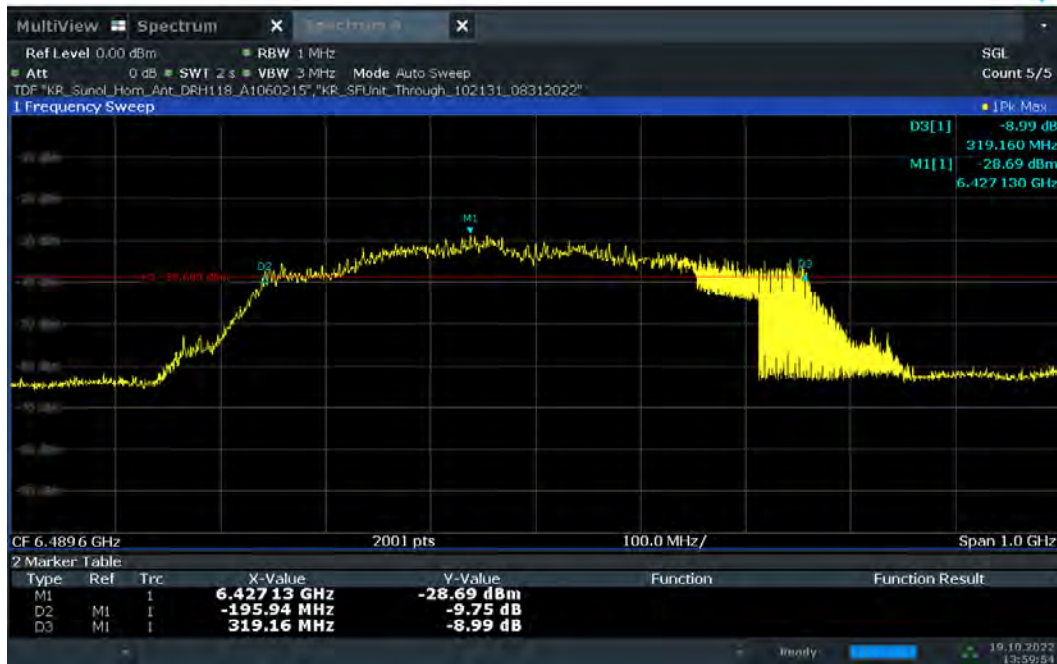

Plot 7-44. 10dBc Bandwidth – CH.5 – SP1 – Preamble 27

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 35 of 82

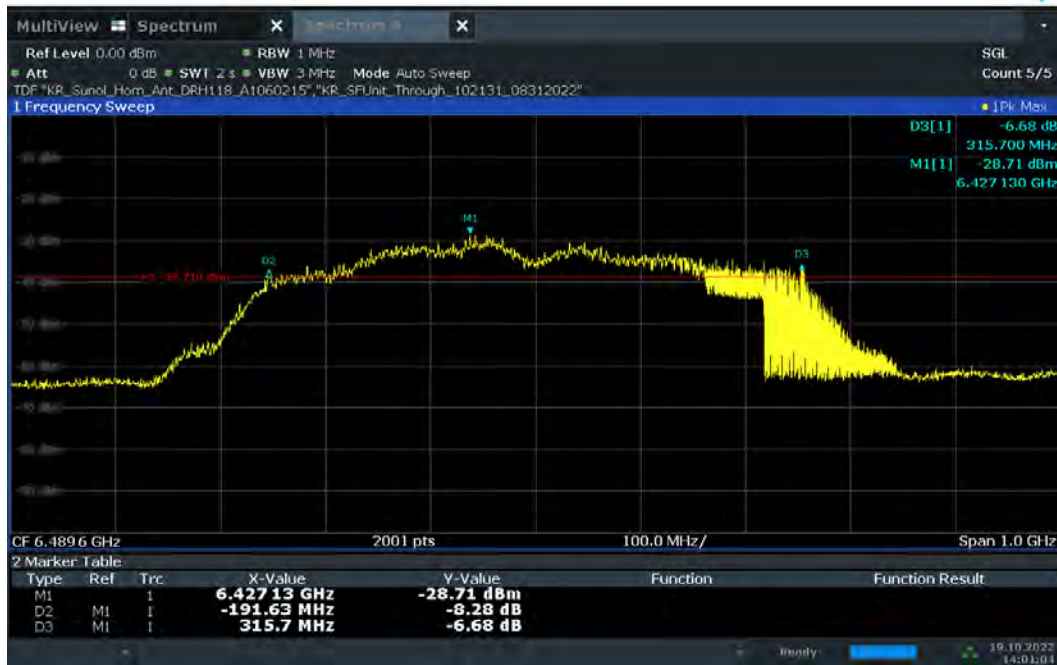

Plot 7-45. 10dBc Bandwidth – CH.5 – SP3 – Preamble 27




Plot 7-46. 10dBc Bandwidth – CH.9 - SP0 – Preamble 9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 36 of 82



Plot 7-47. 10dBc Bandwidth – CH.9 – SP1 – Preamble 9

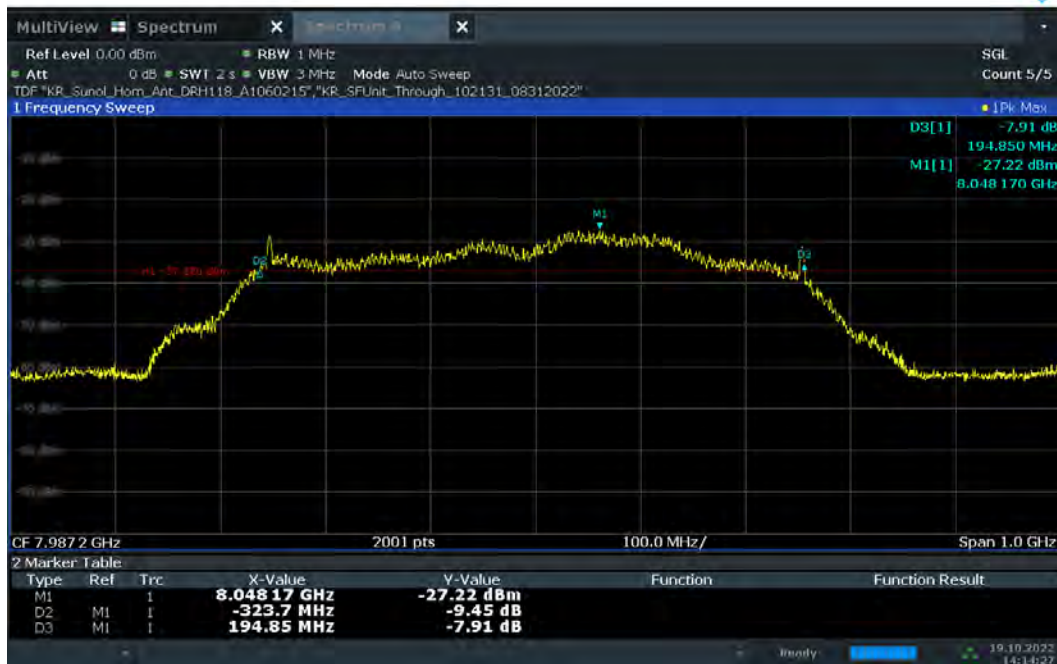


Plot 7-48. 10dBc Bandwidth – CH.9 – SP3 – Preamble 9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 37 of 82



Plot 7-49. 10dBc Bandwidth – CH.9 - SP0 – Preamble 10

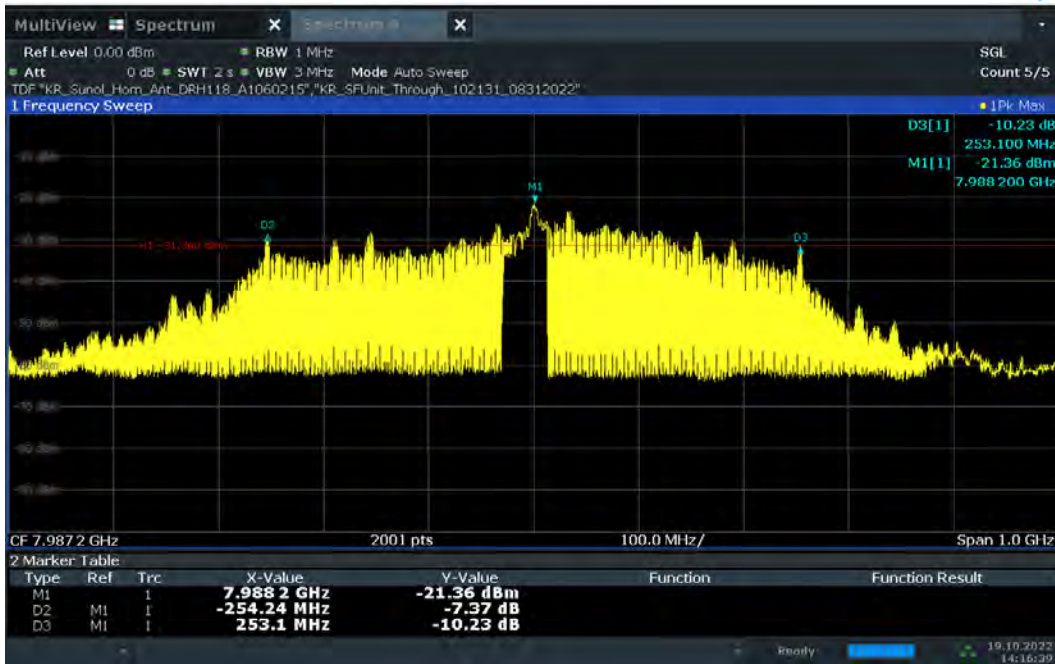

Plot 7-50. 10dBc Bandwidth – CH.9 – SP1 – Preamble 10

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 38 of 82




Plot 7-51. 10dBc Bandwidth – CH.9 – SP3 – Preamble 10



Plot 7-52. 10dBc Bandwidth – CH.9 - SP0 – Preamble 11

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 39 of 82

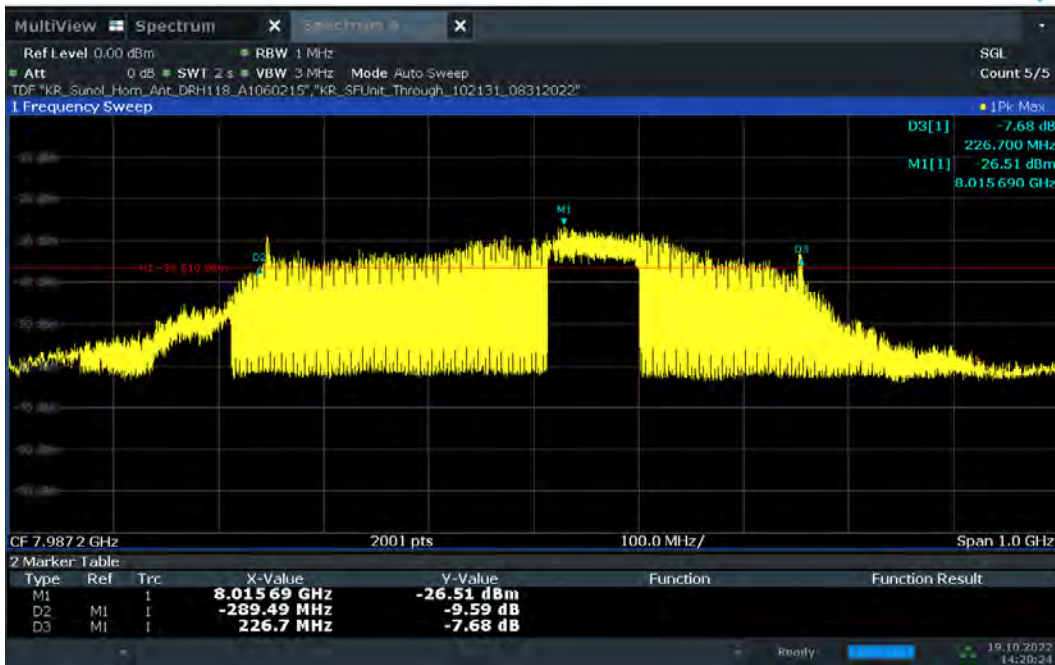

Plot 7-53. 10dBc Bandwidth – CH.9 – SP1 – Preamble 11



Plot 7-54. 10dBc Bandwidth – CH.9 – SP3 – Preamble 11

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 40 of 82




Plot 7-55. 10dBc Bandwidth – CH.9 - SP0 – Preamble 12




Plot 7-56. 10dBc Bandwidth – CH.9 – SP1 – Preamble 12

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 41 of 82

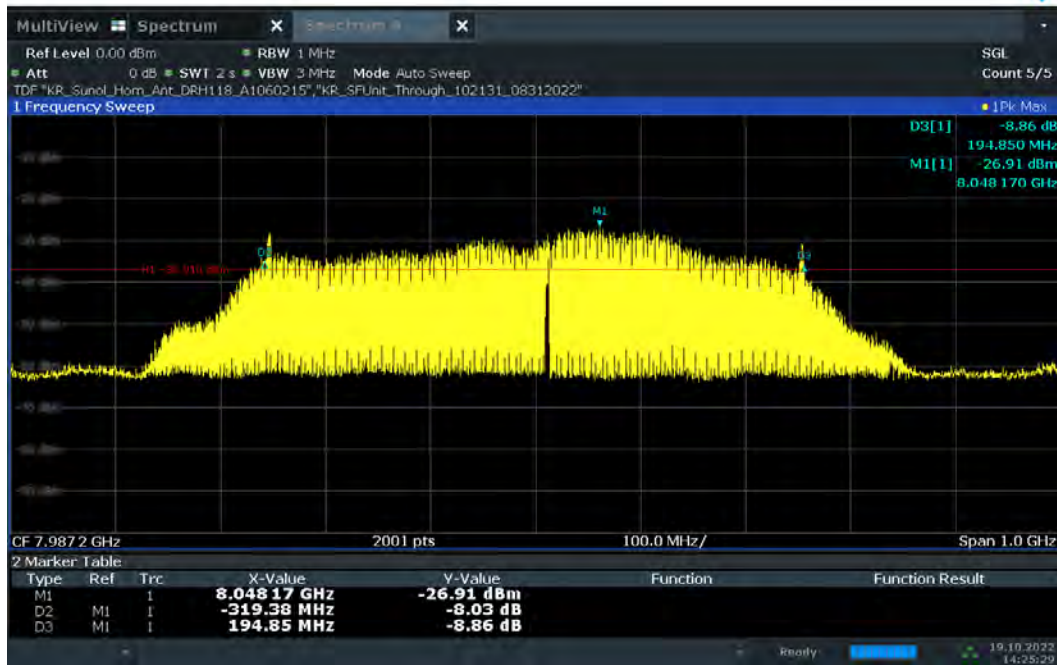

Plot 7-57. 10dBc Bandwidth – CH.9 – SP3 – Preamble 12

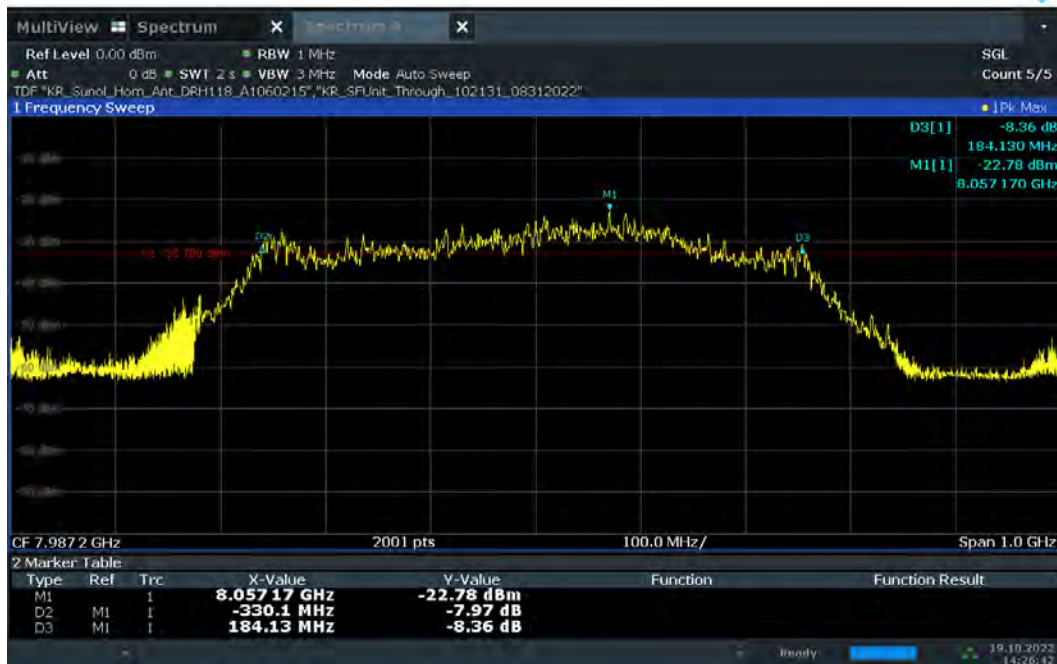

Plot 7-58. 10dBc Bandwidth – CH.9 - SP0 – Preamble 27

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 42 of 82



Plot 7-59. 10dBc Bandwidth – CH.9 – SP1 – Preamble 27



Plot 7-60. 10dBc Bandwidth – CH.9 – SP3 – Preamble 27

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 43 of 82

7.3 Cessation Time

§15.519(a)(1)

Test Overview and Limit

§15.519(a)(1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgment from the associated receiver that its transmission is being received an acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span = 0 Span Mode
4. Sweep time shall be sufficient to demonstrate EUTs compliance with the rule part.


Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument and Measurement Setup

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 44 of 82

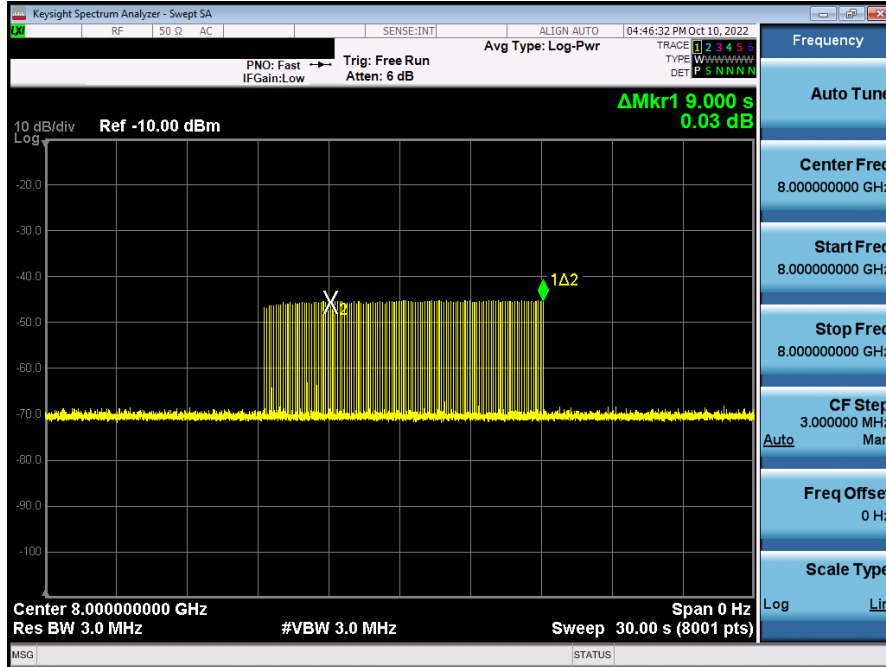

Plot 7-61. Cessation Time Plot

Test Note

Marker1 represents the EUT for UWB stop receiving, and 1Δ2 shows the EUT for UWB cease transmitting.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 45 of 82



7.4 Peak Power and Maximum Average Emissions

§15.519(e), §15.519(c)

Test Overview and Limit

15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP.

15.519 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100 - 10600	-41.3

Table 7-4. Average EIRP Limit

Test Procedures Used

ANSI C63.10-2013

Test Settings

Peak:

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 50MHz, VBW = 80MHz
3. Detector = Peak
4. Sweep time = auto coupled
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average:

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz, VBW = 3MHz
3. Detector = Average (RMS)
4. Sweep time = No more than 1ms integration period over measurement bin
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 46 of 82



Test Note

All combinations of HPRF/BPRF, power mode, and preamble are investigated for average and peak EIRP measurements. Only the worst case combinations are reported for each channel and each antenna.

RESULTS – BPRF

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin [dB]
1	5	SP0	9	V	6.7395	-2.71	0	-2.71
	9	SP0	9	V	8.2336	-1.69	0	-1.69
2	5	SP0	9	V	6.4841	-2.16	0	-2.16
	9	SP0	9	V	8.0672	-1.67	0	-1.67

Table 7-5. BPRF Highest Peak Power Results

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Average Power (dBm)	Average Limit (dBm)	Margin [dB]
1	5	SP3	9	V	6.7165	-43.58	-41.3	-2.28
	9	SP3	12	V	8.2121	-42.84	-41.3	-1.54
2	5	SP3	10	V	6.4476	-43.10	-41.3	-1.80
	9	SP3	9	V	8.0337	-43.68	-41.3	-2.38

Table 7-6. BPRF Highest Average Power Results

Sample Calculation:

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$RSE \text{ EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + AFCL \text{ (dB/m)} + 20\text{Log(Dm)} - 104.8$$

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 47 of 82




Plot 7-62. UWB Peak Power Measurement - ANT 1 - CH.5 – BPRF



Plot 7-63. UWB Peak Power Measurement - ANT 1 - CH.9 – BPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 48 of 82

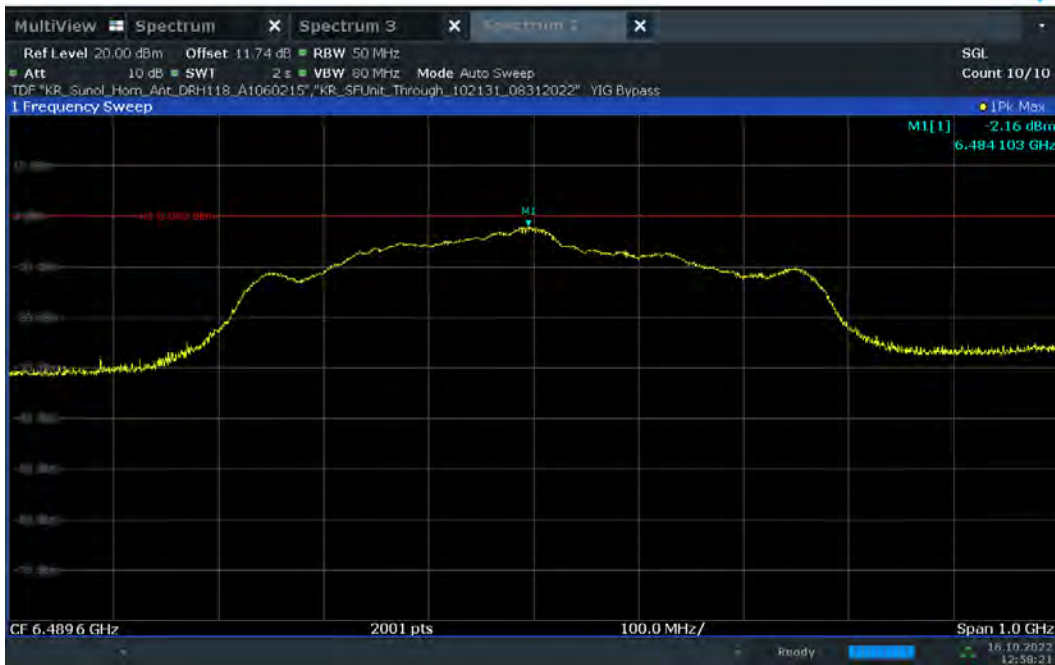


Plot 7-64. UWB Peak Power Measurement - ANT 2 - CH.5 – BPRF



Plot 7-65. UWB Peak Power Measurement - ANT 2 - CH.9 – BPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 49 of 82

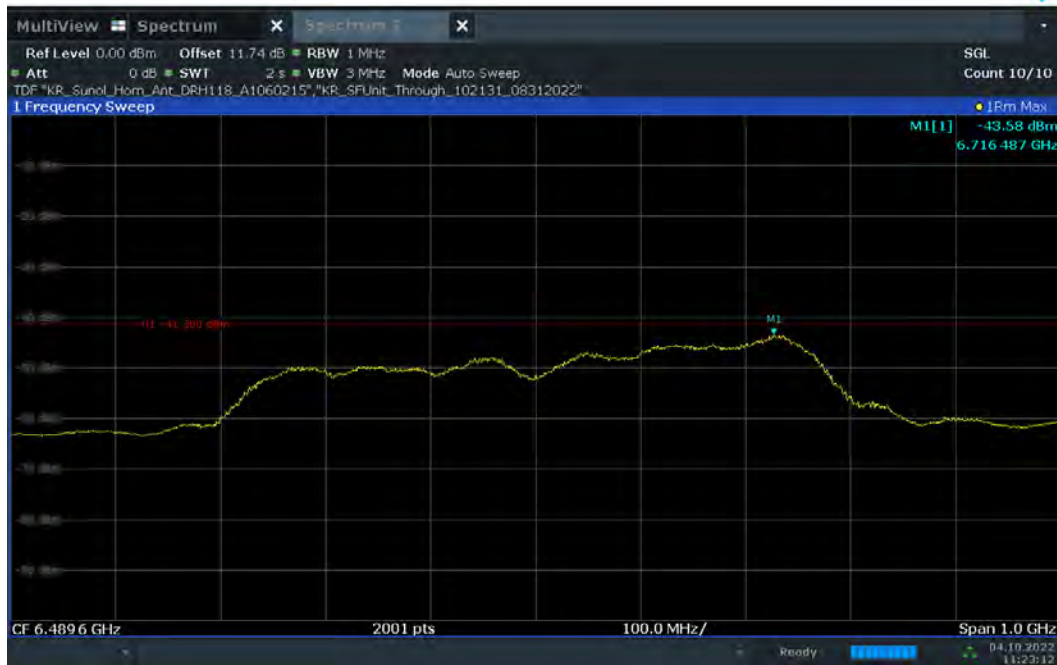


Plot 7-66. UWB Average Power Measurement - ANT 1 - CH.5 – BPRF



Plot 7-67. UWB Average Power Measurement - ANT 1 - CH.9 – BPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 50 of 82

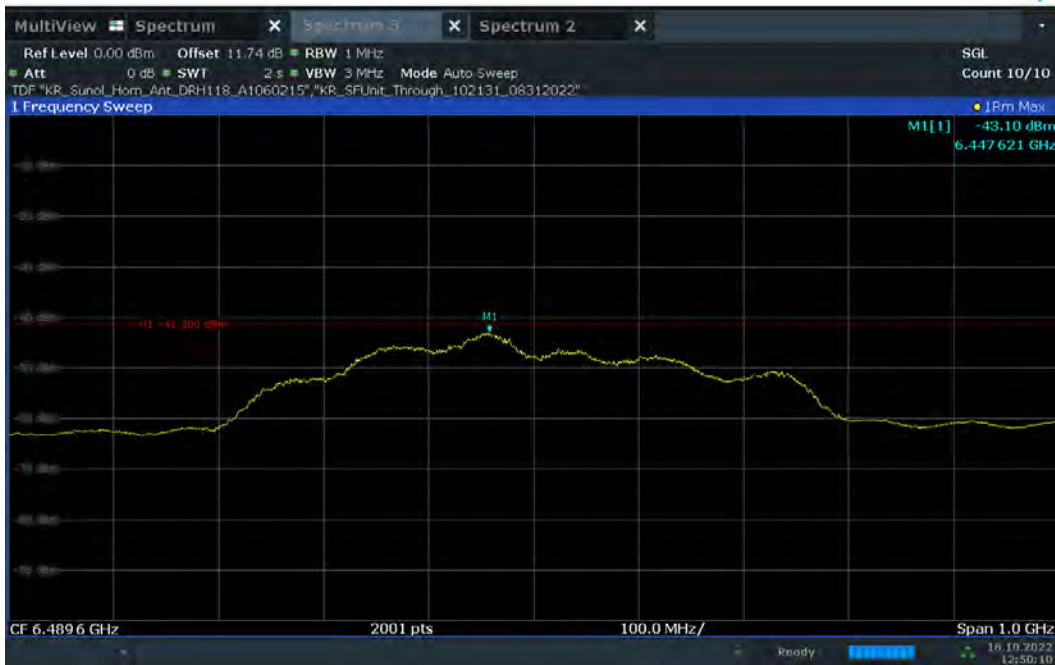

Plot 7-68. UWB Average Power Measurement - ANT 2 - CH.5 – BPRF



Plot 7-69. UWB Average Power Measurement - ANT 2 - CH.9 – BPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 51 of 82



RESULTS – HPRF

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin [dB]
1	5	SP0	27	V	6.7390	-8.83	0	-8.83
	9	SP0	27	V	8.1151	-5.66	0	-5.66
2	5	SP0	27	V	6.3627	-9.37	0	-9.37
	9	SP0	27	V	8.1126	-6.4	0	-6.4

Table 7-7. HPRF Highest Peak Power Results

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Average Power (dBm)	Average Limit (dBm)	Margin [dB]
1	5	SP0	27	V	6.7200	-43.94	-41.3	-2.64
	9	SP0	27	V	8.2176	-43	-41.3	-1.7
2	5	SP3	27	V	6.4486	-43.39	-41.3	-2.09
	9	SP3	27	V	8.0327	-43.89	-41.3	-2.59

Table 7-8. HPRF Highest Average Power Results

Sample Calculation

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter

$$RSE \text{ EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + AFCL \text{ (dB/m)} + 20\text{Log}(Dm) - 104.8$$

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 52 of 82



Plot 7-70. UWB Peak Power Measurement - ANT 1 - CH.5 – HPRF



Plot 7-71. UWB Peak Power Measurement - ANT 1 - CH.9 – HPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 53 of 82




Plot 7-72. UWB Peak Power Measurement - ANT 2 - CH.5 – HPRF




Plot 7-73. UWB Peak Power Measurement - ANT 2 - CH.9 – HPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 54 of 82

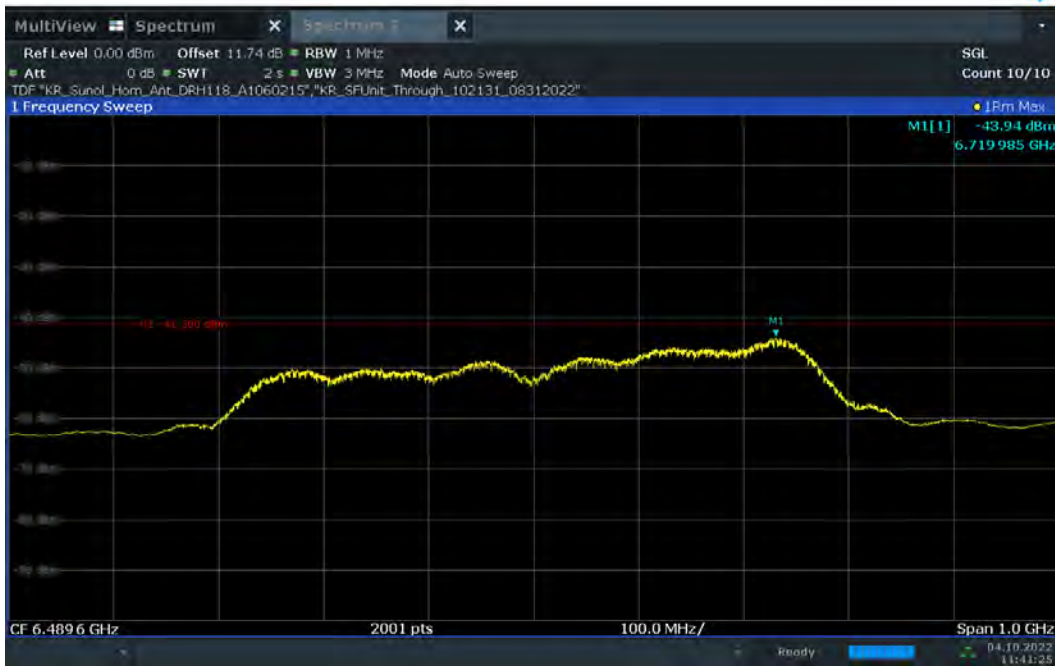

Plot 7-74. UWB Average Power Measurement - ANT 1 - CH.5 – HPRF

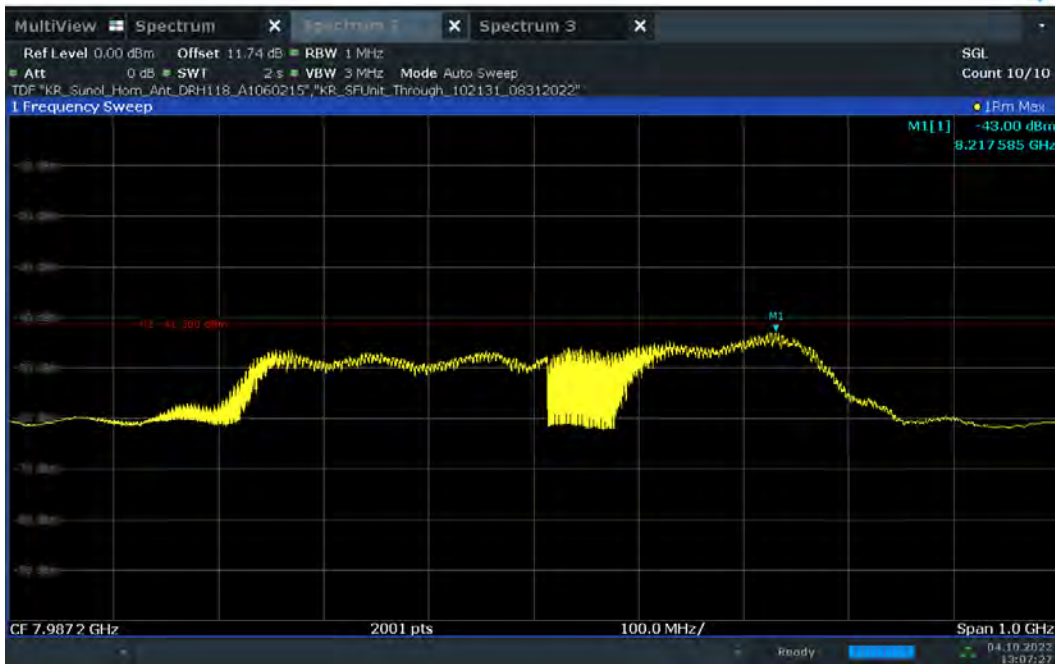


Plot 7-75. UWB Average Power Measurement - ANT 1 - CH.9 – HPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 55 of 82



Plot 7-76. UWB Average Power Measurement - ANT 2 - CH.5 – HPRF

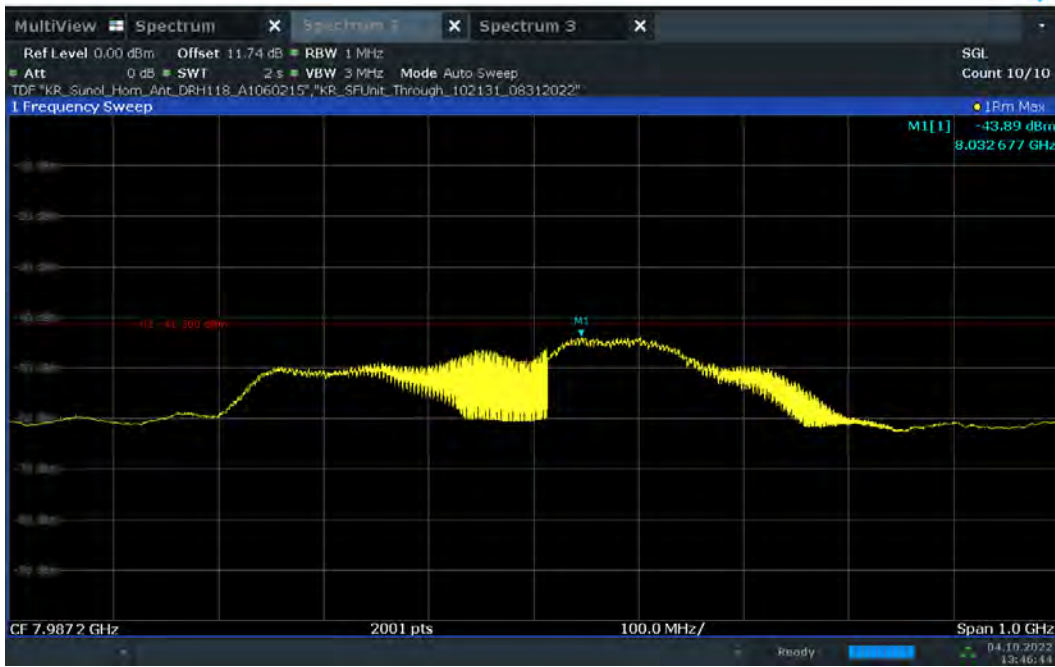

Plot 7-77. UWB Average Power Measurement - ANT 2 - CH.9 – HPRF

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 56 of 82



7.5 Radiated Measurement Data above 960MHz

§15.519 (c), §15.519(d)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

§15.519(c)

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Table 7-9. Above 960MHz Average Limits

§15.519(d)

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

Table 7-10. Above 960MHz Average Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Average EIRP Measurements

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz (30kHz for emissions in the GPS bands)
3. VBW = 3MHz (100kHz for the emissions in the GPS bands)
4. Detector = RMS
5. Sweep time = No more than 1ms integration period over each measurement bin
6. Trace mode = Max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 57 of 82

Test Setup

The EUT and measurement equipment were set up as shown test setup photos provided.

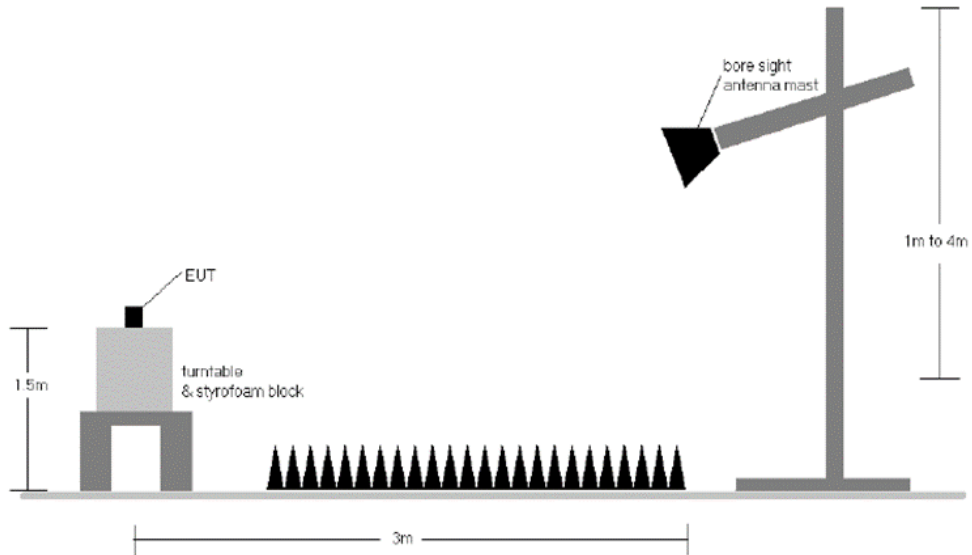


Figure 7-3. Radiated Test Setup > 1GHz

Test Notes

1. All modes of operation and settings (Preamble, Packet Type, etc) were investigated and the worst-case emissions are reported.
2. The RBW for measurements in the GPS Bands were reduced to 30kHz in order to prove compliance.
3. 1000 ~ 18000 MHz and above 18000 MHz pre-scan plots were conducted at 0.7 and 0.6 meter respectively. The plots are only for the purpose of spurious emission identification.
4. All final measurements were made at 0.7 and 0.6 meters respectively.
5. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
6. AFCL (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)


Sample Calculation

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE level is calculated by applying the additional factors shown below for a test distance of 3 meter.


Spurious Emission Level (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 58 of 82

Channel 5 ANTENNA 1:

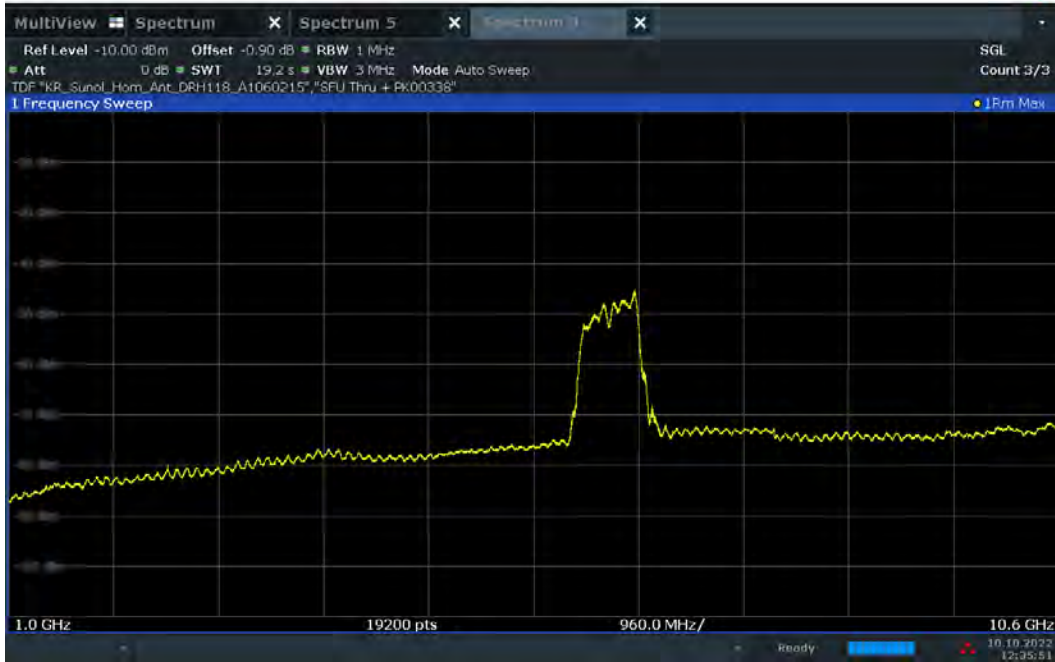

Plot 7-78. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.5 - ANT 1

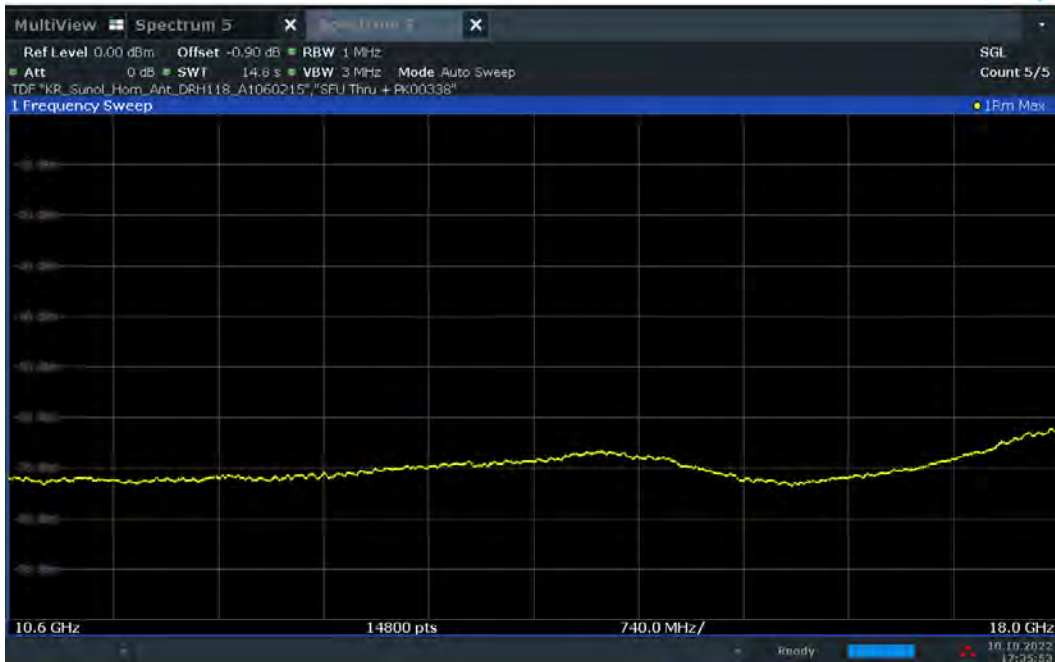

Plot 7-79. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.5 - ANT 1

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 - 12/16/2022	EUT Type: Portable Handset	Page 59 of 82




Plot 7-80. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.5 - ANT 1 – GPS band



Plot 7-81. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.5 - ANT 1 – GPS band

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 60 of 82

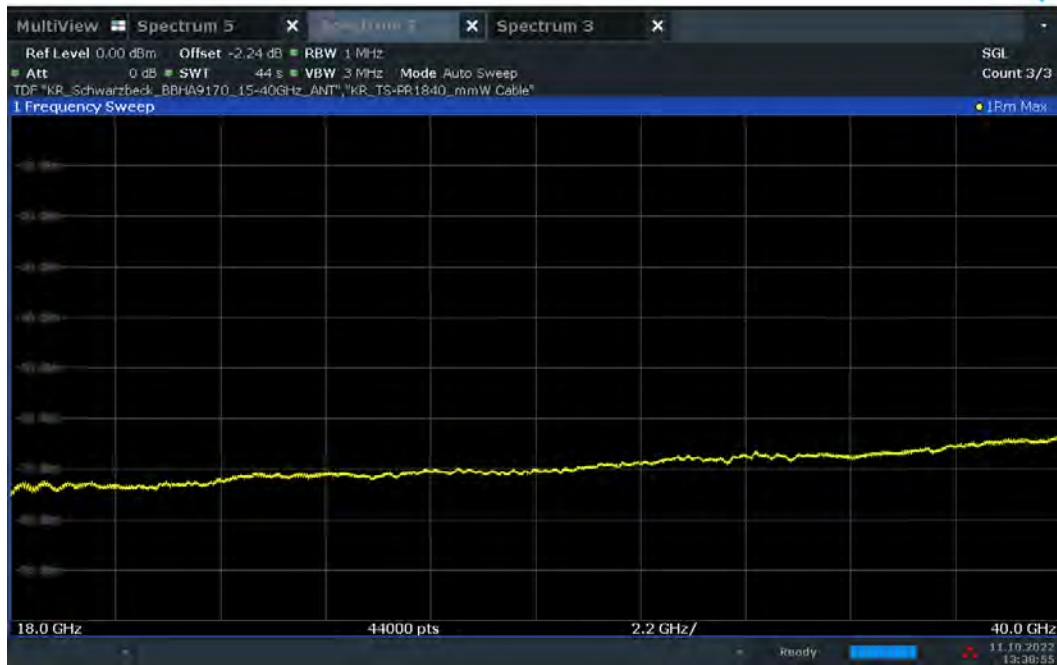

Plot 7-82. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.5 - ANT 1

Channel:	5
Frequency (MHz):	6489.6
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1536	RMS	H	-	-	-83.29	-75.30	-7.99
1900	RMS	H	-	-	-82.21	-63.30	-18.91
3098	RMS	H	-	-	-79.35	-61.30	-18.05
10515	RMS	H	-	-	-71.60	-41.30	-30.30
12979	RMS	H	-	-	-71.12	-61.30	-9.82
25958	RMS	H	-	-	-70.83	-61.30	-9.53

Table 7-11. Radiated Spurious Emissions CH. 5 – ANT1


Channel:	5
Frequency (MHz):	6489.6
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1164	RMS	H	-	-	-99.85	-85.30	-14.55
1176	RMS	H	-	-	-100.29	-85.30	-14.99
1211	RMS	H	-	-	-100.42	-85.30	-15.12
1569	RMS	H	-	-	-99.94	-85.30	-14.64
1579	RMS	H	-	-	-100.20	-85.30	-14.90
1600	RMS	H	-	-	-100.27	-85.30	-14.97


Table 7-12. Radiated Spurious Emissions CH. 5 – ANT1 – GPS BANDS

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 61 of 82

Channel 5 ANTENNA 2:

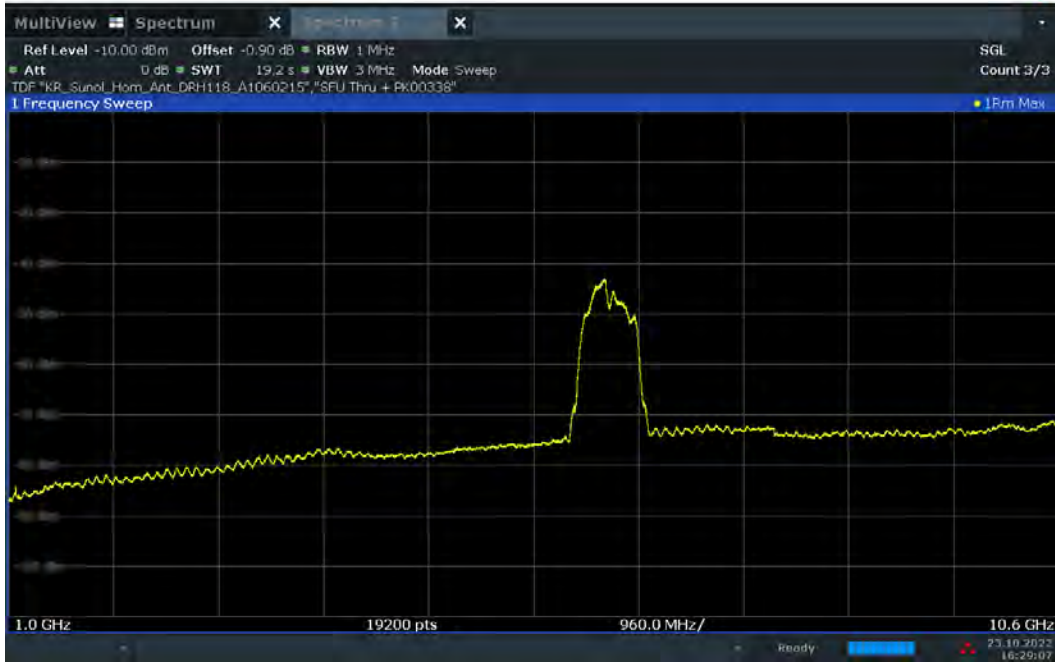

Plot 7-83. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.5 - ANT 2

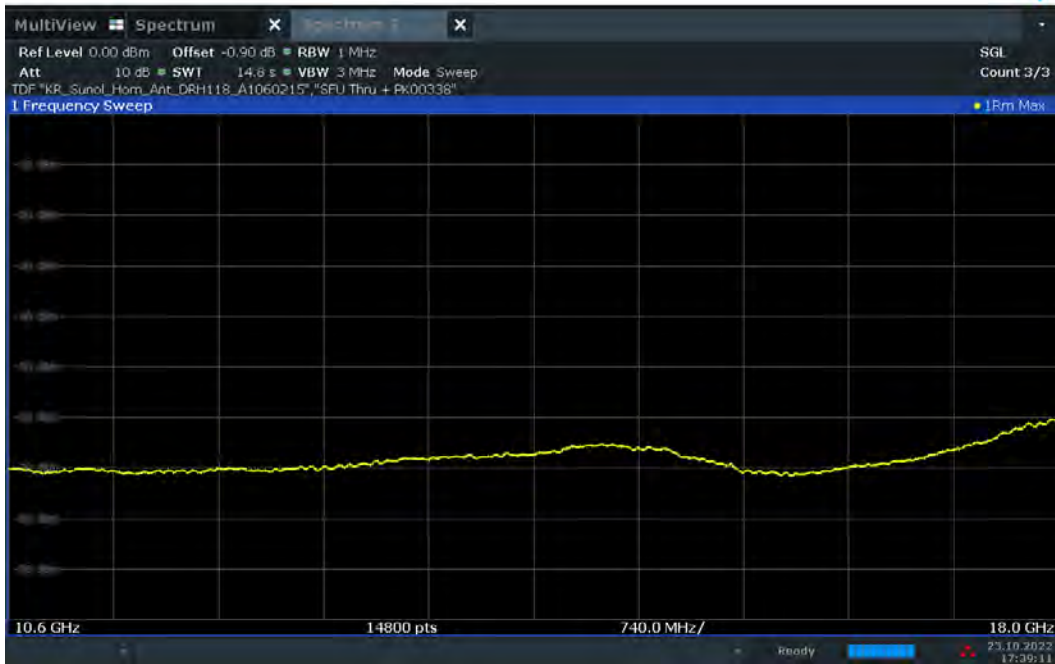


Plot 7-84. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.5 - ANT 2

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 62 of 82




Plot 7-85. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.5 - ANT 2 – GPS band

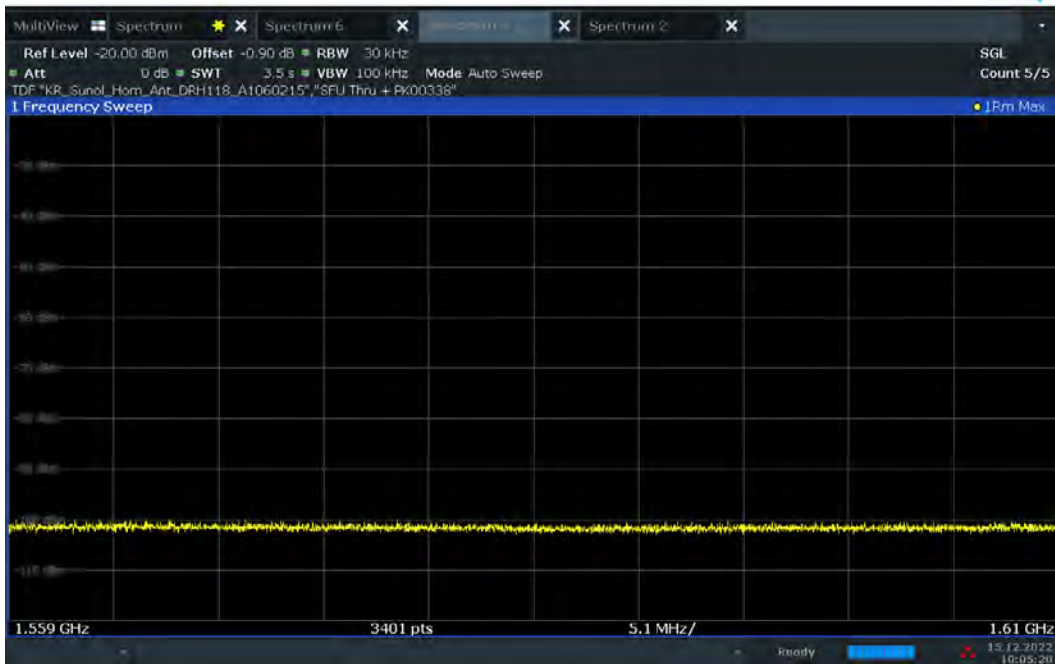

Plot 7-86. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.5 - ANT 2 – GPS band

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 63 of 82

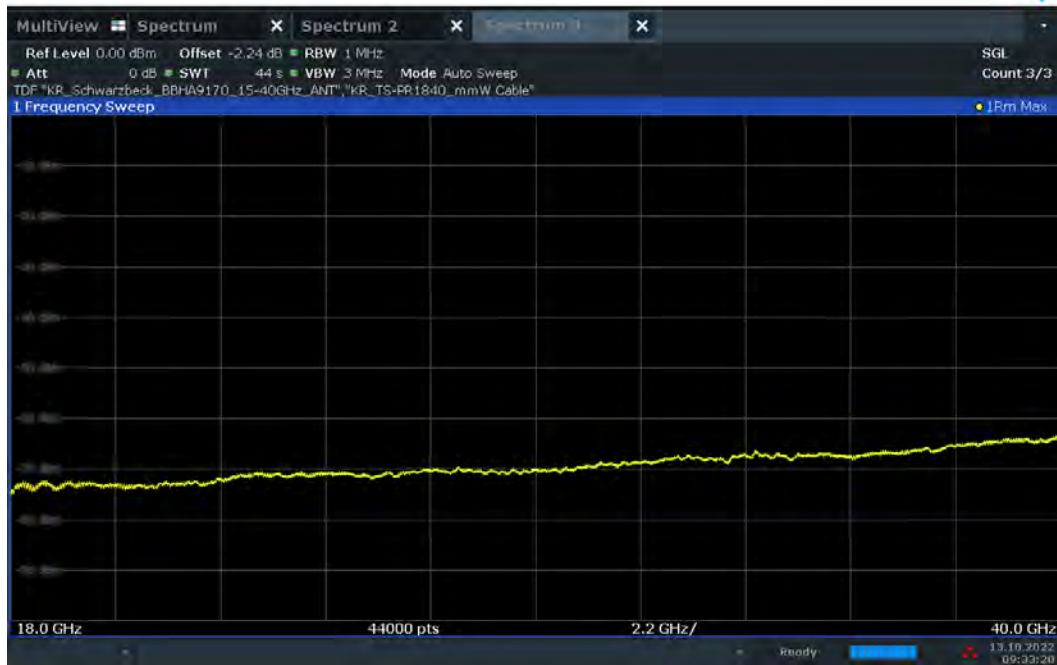

Plot 7-87. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.5 - ANT 2

Channel:	5
Frequency (MHz):	6489.6
Preamble ID	10
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1519	RMS	H	-	-	-83.37	-75.30	-8.15
1895	RMS	H	-	-	-81.91	-63.30	-18.62
3096	RMS	H	-	-	-79.20	-61.30	-17.89
10599	RMS	H	-	-	-71.71	-41.30	-30.52
12979	RMS	H	-	-	-71.23	-61.30	-8.47
25958	RMS	H	-	-	-70.98	-61.30	-9.49

Table 7-13. Radiated Spurious Emissions CH. 5 – ANT2


Channel:	5
Frequency (MHz):	6489.6
Preamble ID	10
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1170	RMS	H	-	-	-100.36	-85.30	-15.06
1187	RMS	H	-	-	-100.35	-85.30	-15.05
1220	RMS	H	-	-	-100.27	-85.30	-14.97
1562	RMS	H	-	-	-100.10	-85.30	-14.80
1570	RMS	H	-	-	-100.07	-85.30	-14.77
1578	RMS	H	-	-	-100.30	-85.30	-15.00


Table 7-14. Radiated Spurious Emissions CH. 5 – ANT2 – GPS BANDS

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 64 of 82

Channel 9 ANTENNA 1:

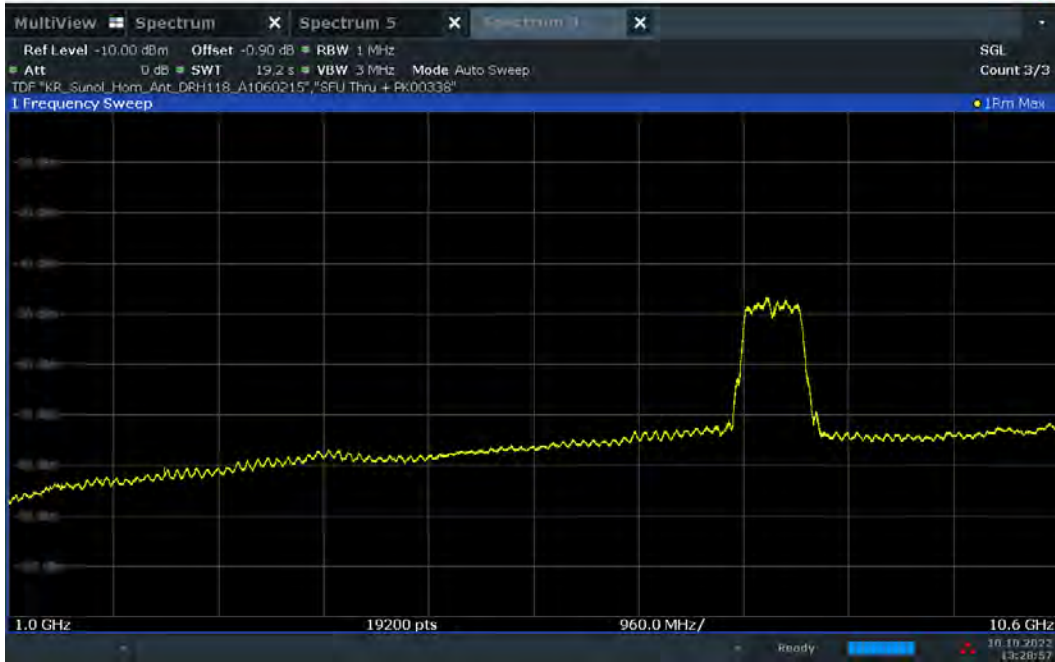

Plot 7-88. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.9 - ANT 1

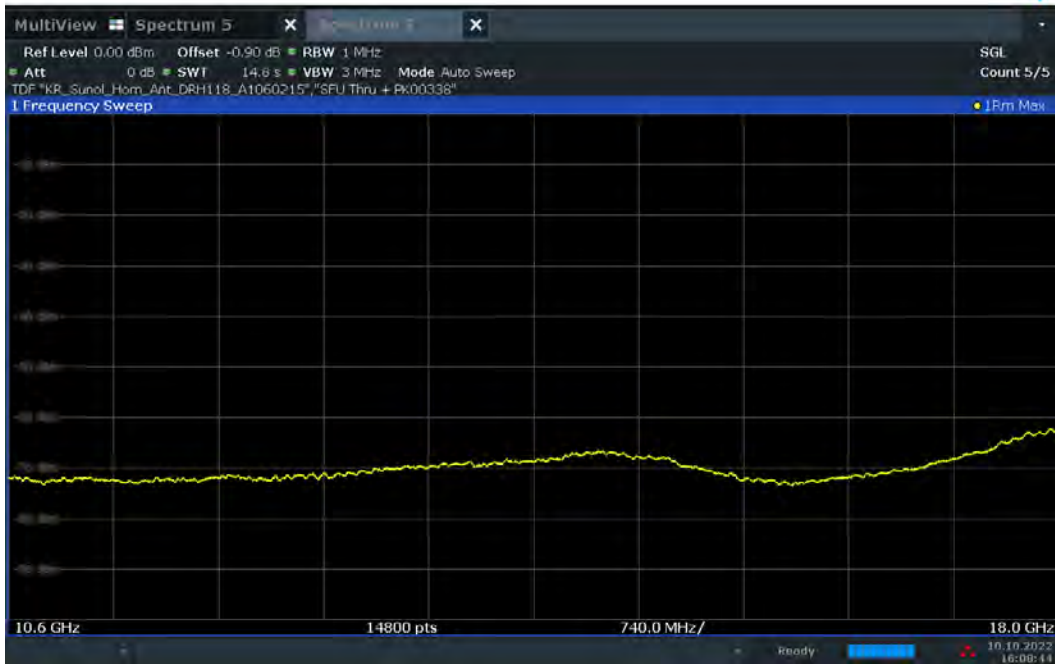

Plot 7-89. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.9 - ANT 1

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 - 12/16/2022	EUT Type: Portable Handset	Page 65 of 82




Plot 7-90. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.9 - ANT 1 – GPS band



Plot 7-91. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.9 - ANT 1 – GPS band

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 66 of 82

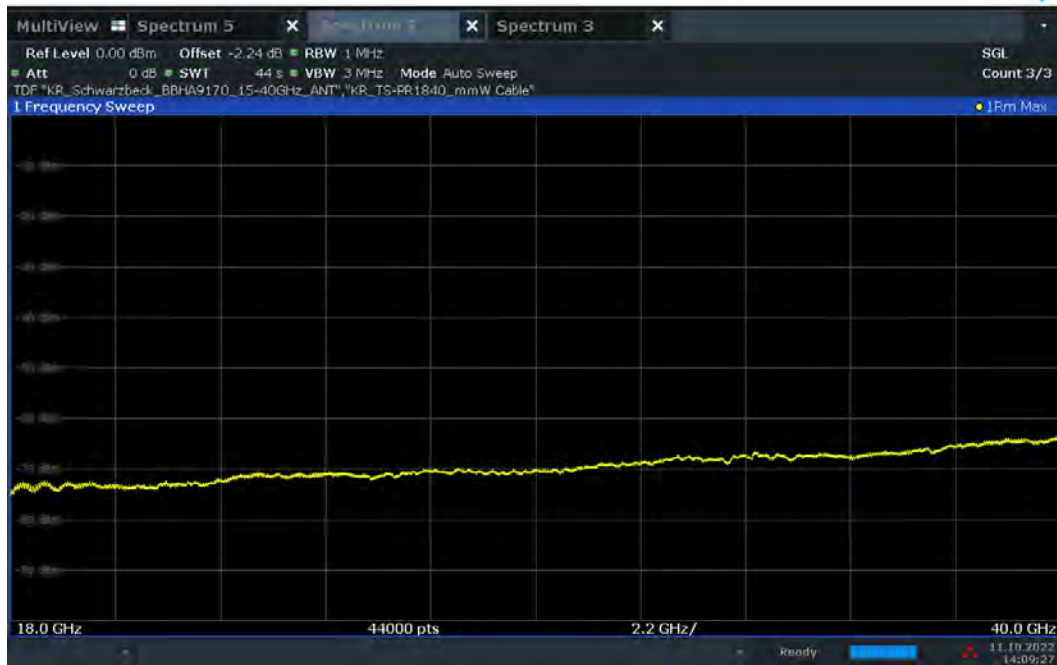

Plot 7-92. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.9 - ANT 1

Channel:	9
Frequency (MHz):	7987.2
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1534	RMS	V	-	-	-83.48	-75.30	-8.18
1896	RMS	V	-	-	-82.32	-63.30	-19.02
3097	RMS	V	-	-	-79.44	-61.30	-18.14
10599	RMS	V	-	-	-72.38	-41.30	-31.08
15974	RMS	V	-	-	-72.36	-61.30	-11.06
31949	RMS	V	-	-	-67.89	-61.30	-6.59

Table 7-15. Radiated Spurious Emissions CH. 9 – ANT1


Channel:	9
Frequency (MHz):	7987.2
Preamble ID	12
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1169	RMS	V	-	-	-99.93	-85.30	-14.63
1174	RMS	V	-	-	-100.00	-85.30	-14.70
1203	RMS	V	-	-	-100.26	-85.30	-14.96
1562	RMS	V	-	-	-100.28	-85.30	-14.98
1573	RMS	V	-	-	-99.99	-85.30	-14.69
1576	RMS	V	-	-	-100.17	-85.30	-14.87


Table 7-16. Radiated Spurious Emissions CH. 9 – ANT1 – GPS BANDS

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 67 of 82

Channel 9 ANTENNA 2:

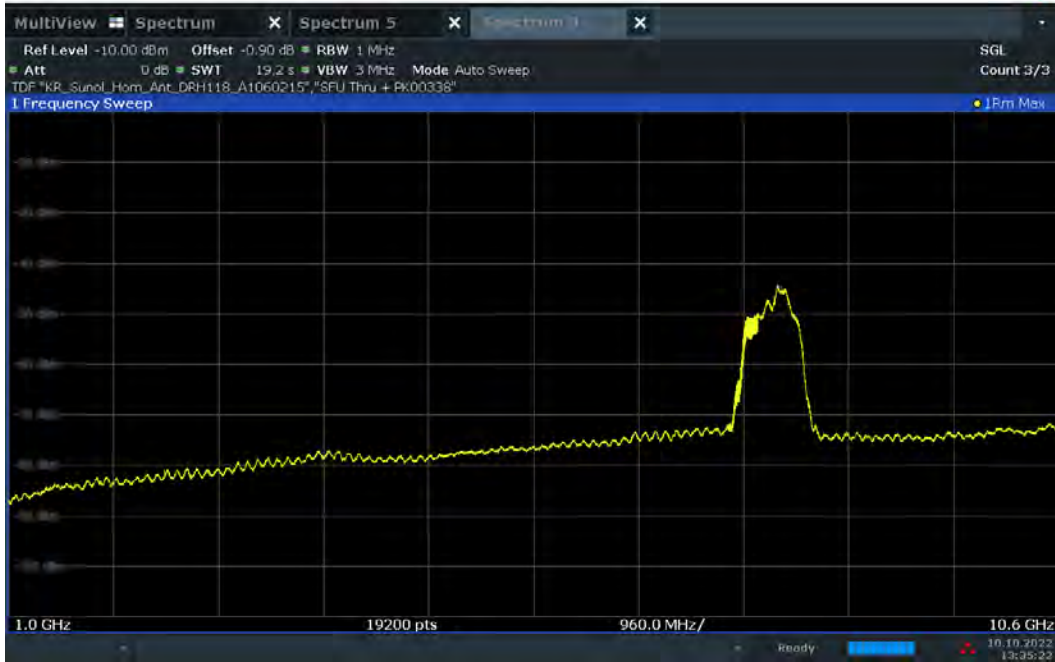

Plot 7-93. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.9 - ANT 2

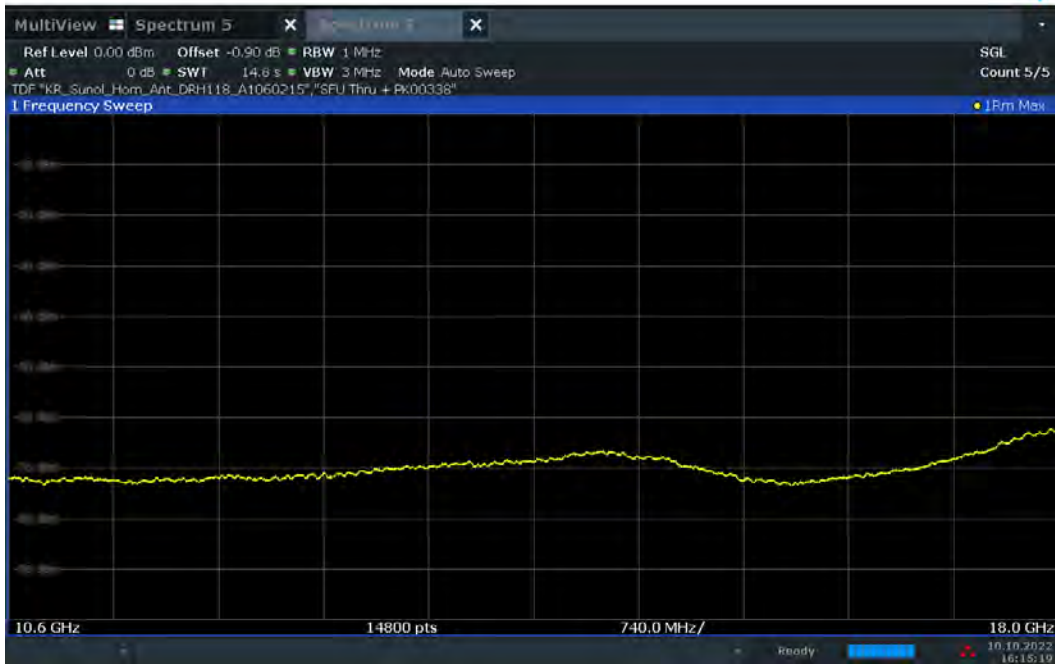


Plot 7-94. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.9 - ANT 2

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 - 12/16/2022	EUT Type: Portable Handset	Page 68 of 82




Plot 7-95. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.9 - ANT 2 – GPS band

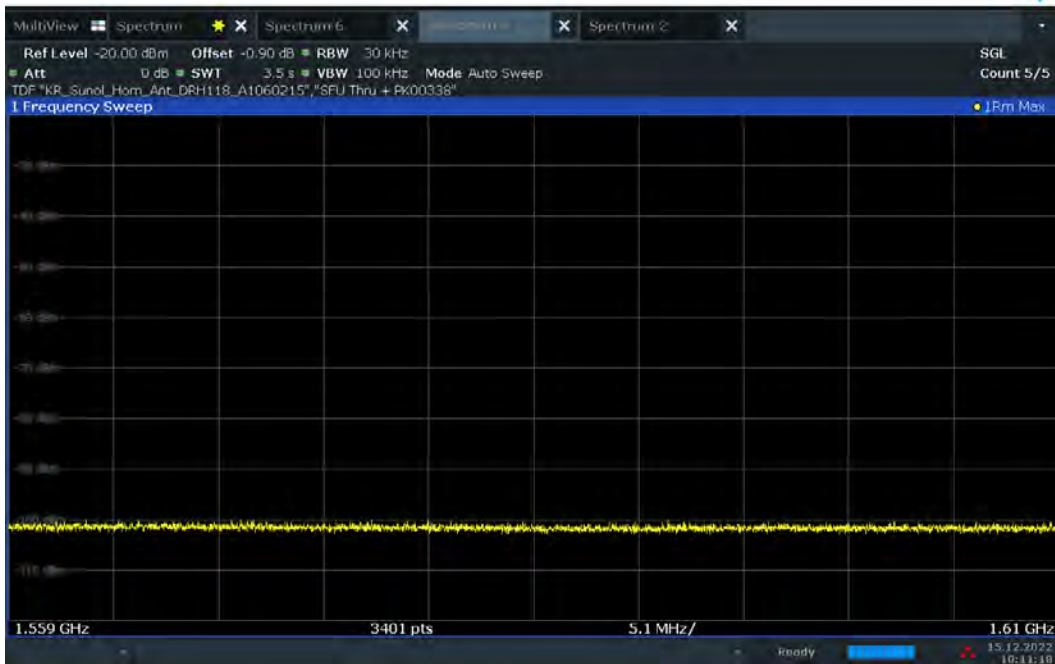

Plot 7-96. Radiated Spurious Pre-Scan 1559 - 1610 MHz – CH 9 - ANT 2 – GPS band

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 69 of 82

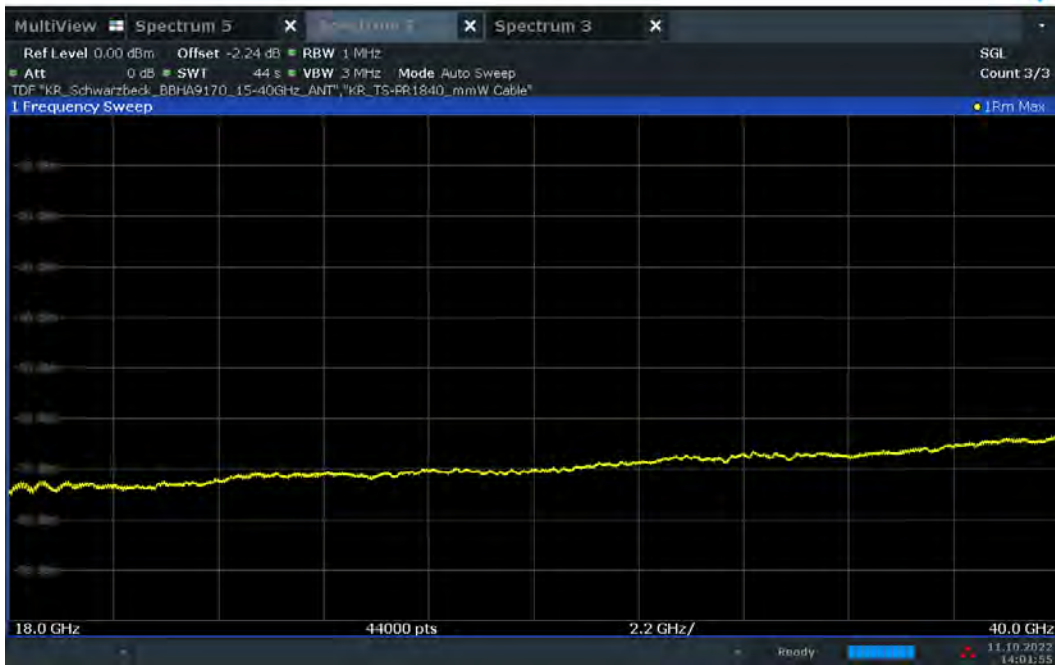

Plot 7-97. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.9 - ANT 2

Channel:	9
Frequency (MHz):	7987.2
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1531	RMS	V	-	-	-83.41	-75.30	-8.32
1983	RMS	V	-	-	-82.32	-63.30	-19.20
3097	RMS	V	-	-	-79.36	-61.30	-18.03
10598	RMS	V	-	-	-71.67	-41.30	-31.01
15974	RMS	V	-	-	-72.27	-61.30	-11.14
31949	RMS	V	-	-	-65.16	-61.30	-6.43

Table 7-17. Radiated Spurious Emissions CH. 9 – ANT2

Channel:	9
Frequency (MHz):	7987.2
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1167	RMS	V	-	-	-99.83	-85.30	-14.53
1177	RMS	V	-	-	-100.09	-85.30	-14.79
1200	RMS	V	-	-	-100.25	-85.30	-14.95
1563	RMS	V	-	-	-100.15	-85.30	-14.85
1577	RMS	V	-	-	-100.23	-85.30	-14.93
1591	RMS	V	-	-	-100.17	-85.30	-14.87

Table 7-18. Radiated Spurious Emissions CH. 9 – ANT2 – GPS BANDS

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 70 of 82



7.6 Radiated Spurious Emissions Measurements – Below 1GHz
§15.209(a), §15.519(c)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-19 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-19. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 71 of 82

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

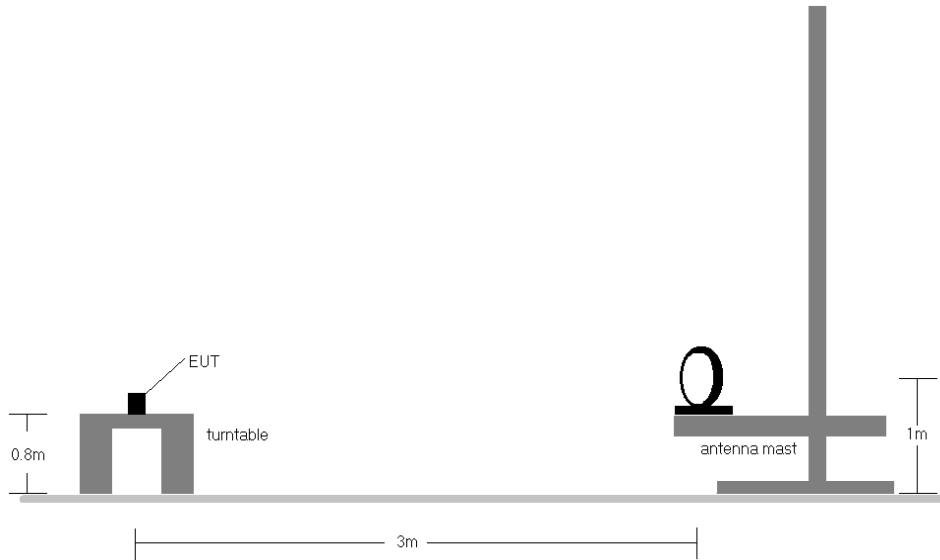


Figure 7-4. Radiated Test Setup < 30Mhz

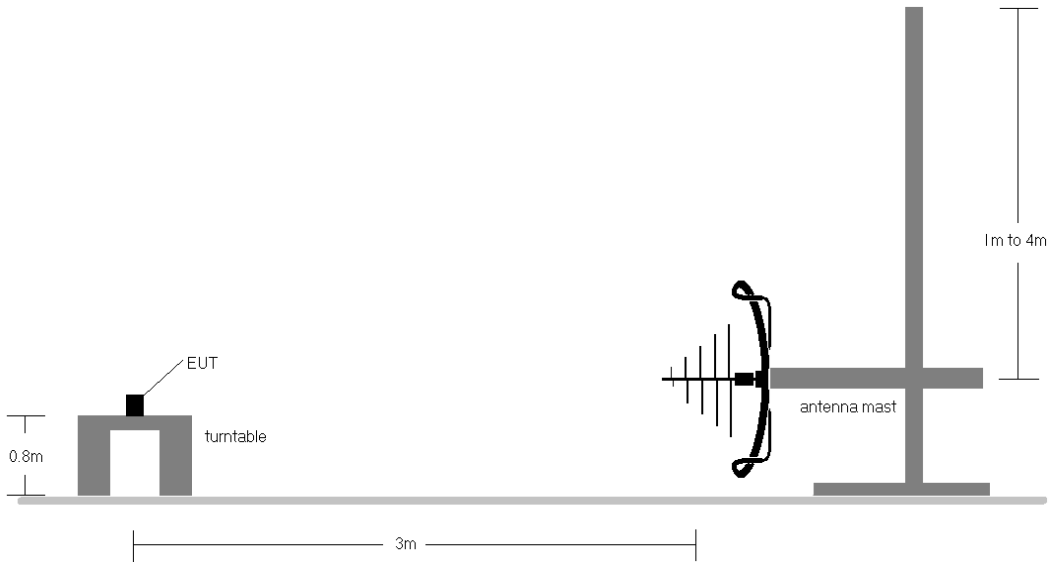


Figure 7-5. Radiated Test Setup < 1GHz


FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 72 of 82



Test Notes

1. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
2. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
3. Emissions were measured at a 3 meter test distance.
4. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
5. No spurious emissions were detected within 20dB of the limit below 30MHz.
6. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.


FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 73 of 82

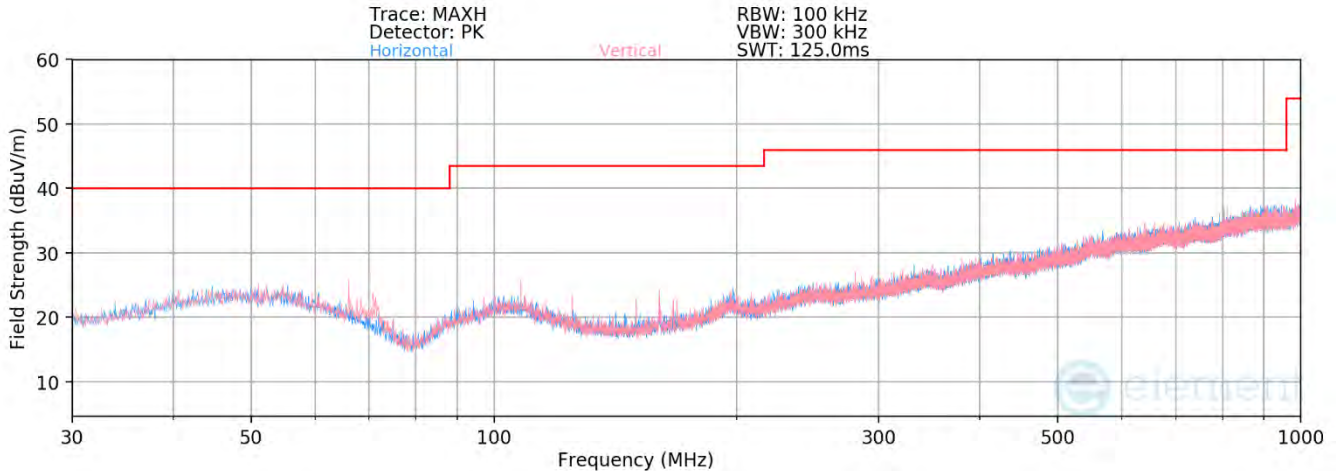

Plot 7-98. 30MHz - 1 GHz Pre-Scan Plots ANT1 – CH 5

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
66.39	Quasi-Peak	V	132	110	-97.52	11.57	21.05	40.00	-18.95
125.00	Quasi-Peak	V	118	85	-95.25	9.91	21.66	43.52	-21.86
166.36	Quasi-Peak	V	121	105	-94.32	9.79	22.47	43.52	-21.05

Table 7-20. Radiated Spurious Emissions Below 1GHz ANT1 – CH5

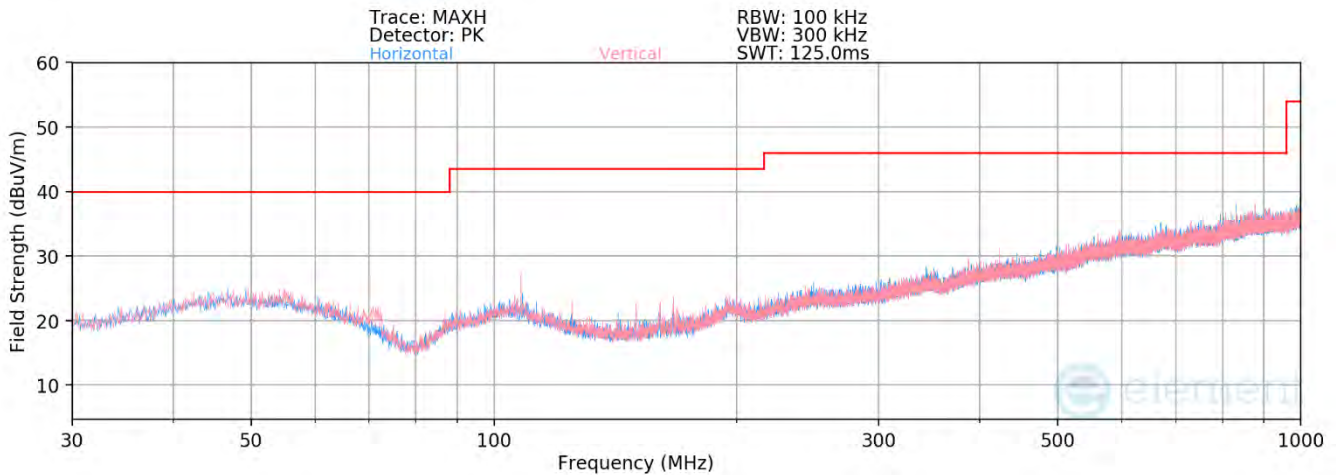


Plot 7-99. 30MHz - 1 GHz Pre-Scan Plots ANT1 – CH 9

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
125.00	Quasi-Peak	V	120	85	-96.14	9.91	20.77	43.52	-22.75
166.00	Quasi-Peak	V	115	99	-93.97	9.76	22.79	43.52	-20.73
958.41	Quasi-Peak	V	-	-	-96.36	25.16	35.80	46.02	-10.22

Table 7-21. Radiated Spurious Emissions Below 1GHz ANT1 – CH9


FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 74 of 82

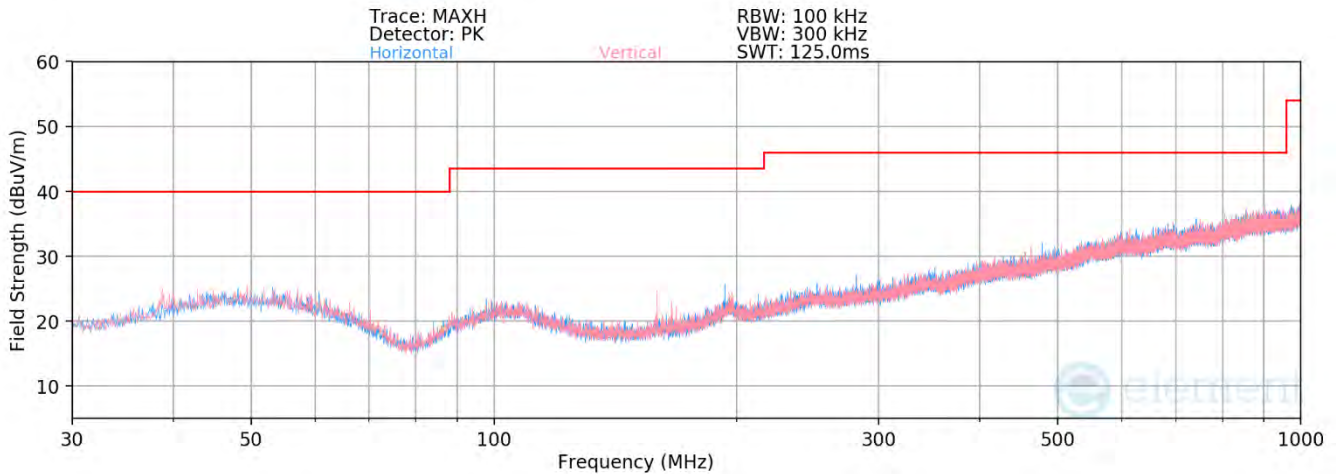

Plot 7-100. 30MHz - 1 GHz Pre-Scan Plots ANT2 – CH 5

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
159.27	Quasi-Peak	V	345	121	-88.27	9.56	28.29	43.52	-15.23
189.22	Quasi-Peak	V	-	-	-98.10	11.76	20.66	43.52	-22.86
849.42	Quasi-Peak	V	-	-	-94.96	24.43	36.47	46.02	-9.56

Table 7-22. Radiated Spurious Emissions Below 1GHz ANT2 – CH5

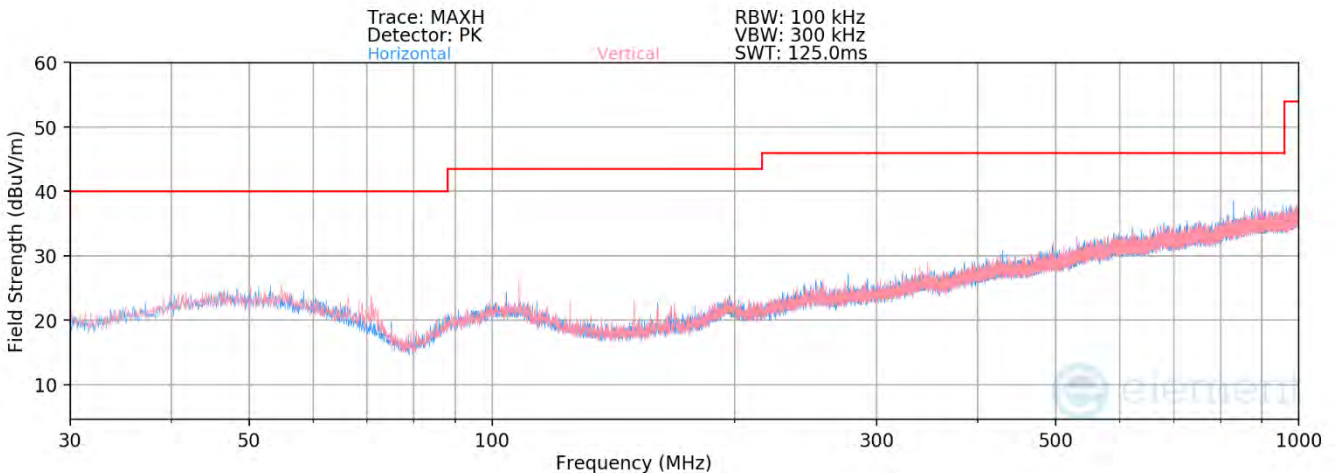

Plot 7-101. 30MHz - 1 GHz Pre-Scan Plots ANT2 – CH 9

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
125.00	Quasi-Peak	V	121	97	-95.85	9.91	21.06	43.52	-22.46
166.51	Quasi-Peak	V	131	88	-94.21	9.81	22.60	43.52	-20.92
953.56	Quasi-Peak	V	-	-	-96.52	25.09	35.57	46.02	-10.45

Table 7-23. Radiated Spurious Emissions Below 1GHz ANT2 – CH9

FCC ID: A3LSMS918JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset		Page 75 of 82



7.7 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All emissions must not exceed the limits shown in Table 7-24 per FCC 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-24. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 76 of 82

Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.


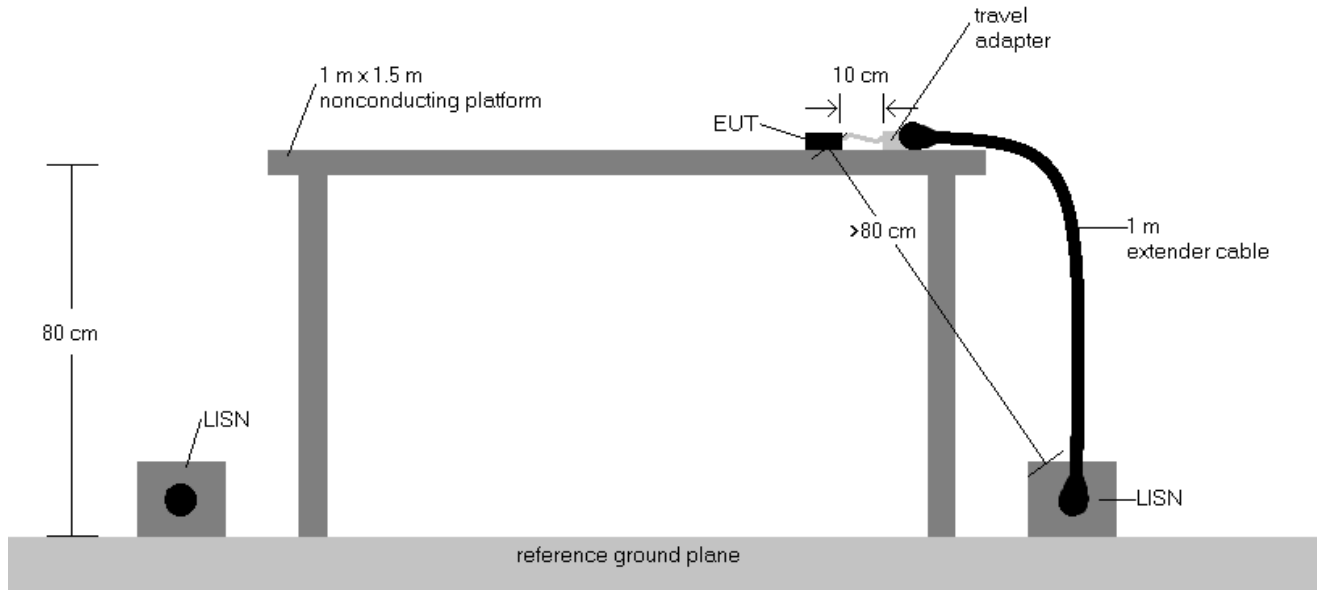


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 and RSS-Gen.
3. L1 = Phase; N = Neutral
4. $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
5. $QP/AV\ Level (dB\mu V) = QP/AV\ Reading (dB\mu V) + Factor (dB)$
6. $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
7. Traces shown in plot are made using a quasi-peak and average detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 77 of 82

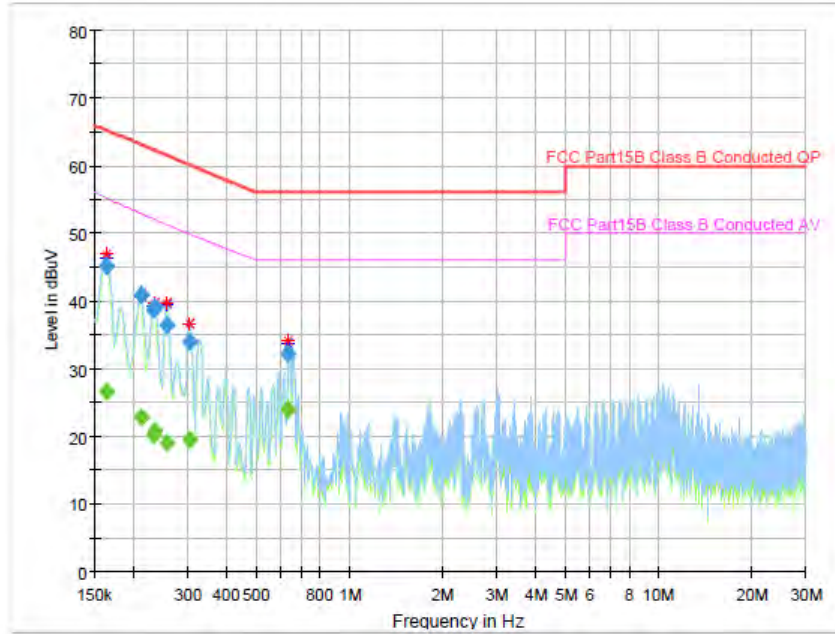


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.164925	---	26.56	55.14	28.58	1000.0	9.000	L1	9.9
0.164925	45.05	---	65.21	20.16	1000.0	9.000	L1	9.9
0.212685	---	22.75	52.90	30.14	1000.0	9.000	L1	9.8
0.212685	40.95	---	63.10	22.15	1000.0	9.000	L1	9.8
0.233580	---	20.15	52.09	31.94	1000.0	9.000	L1	9.7
0.233580	38.61	---	62.32	23.71	1000.0	9.000	L1	9.7
0.236565	---	20.82	51.98	31.16	1000.0	9.000	L1	9.7
0.236565	39.07	---	62.22	23.14	1000.0	9.000	L1	9.7
0.257460	---	18.97	51.27	32.30	1000.0	9.000	L1	9.7
0.257460	36.43	---	61.51	25.08	1000.0	9.000	L1	9.7
0.305220	---	19.37	49.86	30.49	1000.0	9.000	L1	9.7
0.305220	33.89	---	60.10	26.21	1000.0	9.000	L1	9.7
0.636555	---	23.96	46.00	22.04	1000.0	9.000	L1	9.9
0.636555	32.21	---	56.00	23.79	1000.0	9.000	L1	9.9

Plot 7-102. Line Conducted Plot (L1) ANT 1 – CH 5

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 78 of 82

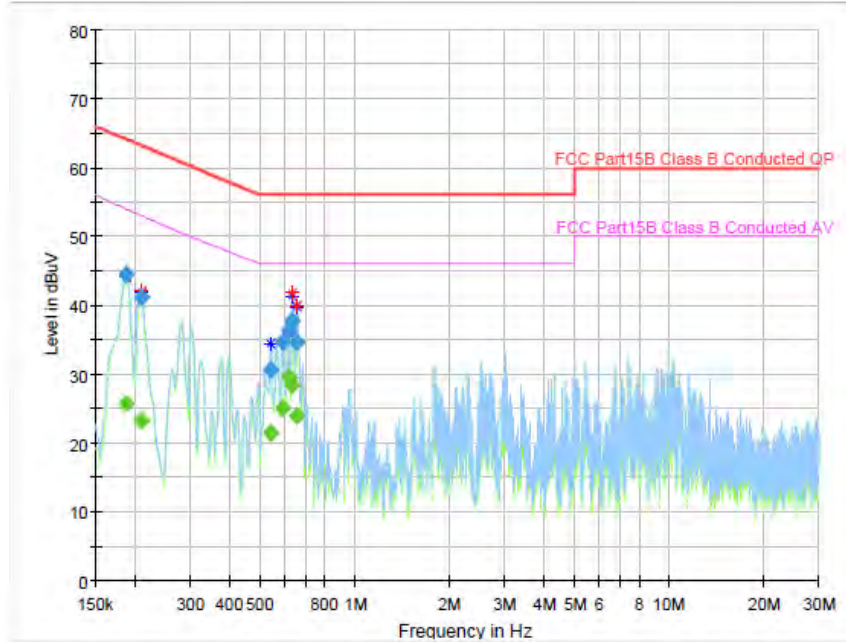


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.188805	---	25.68	53.93	28.26	1000.0	9.000	N	9.9
0.188805	44.38	---	64.09	19.71	1000.0	9.000	N	9.9
0.209700	---	23.20	53.02	29.82	1000.0	9.000	N	9.8
0.209700	41.03	---	63.22	22.19	1000.0	9.000	N	9.8
0.541035	---	21.47	46.00	24.53	1000.0	9.000	N	9.9
0.541035	30.51	---	56.00	25.49	1000.0	9.000	N	9.9
0.591780	---	25.13	46.00	20.87	1000.0	9.000	N	9.9
0.591780	34.65	---	56.00	21.35	1000.0	9.000	N	9.9
0.615660	---	29.47	46.00	16.53	1000.0	9.000	N	9.9
0.615660	36.31	---	56.00	19.69	1000.0	9.000	N	9.9
0.636555	---	28.30	46.00	17.70	1000.0	9.000	N	9.9
0.636555	37.71	---	56.00	18.29	1000.0	9.000	N	9.9
0.657450	---	23.86	46.00	22.14	1000.0	9.000	N	9.9
0.657450	34.58	---	56.00	21.42	1000.0	9.000	N	9.9

Plot 7-103. Line Conducted Plot (N) ANT 1 – CH 5

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 79 of 82

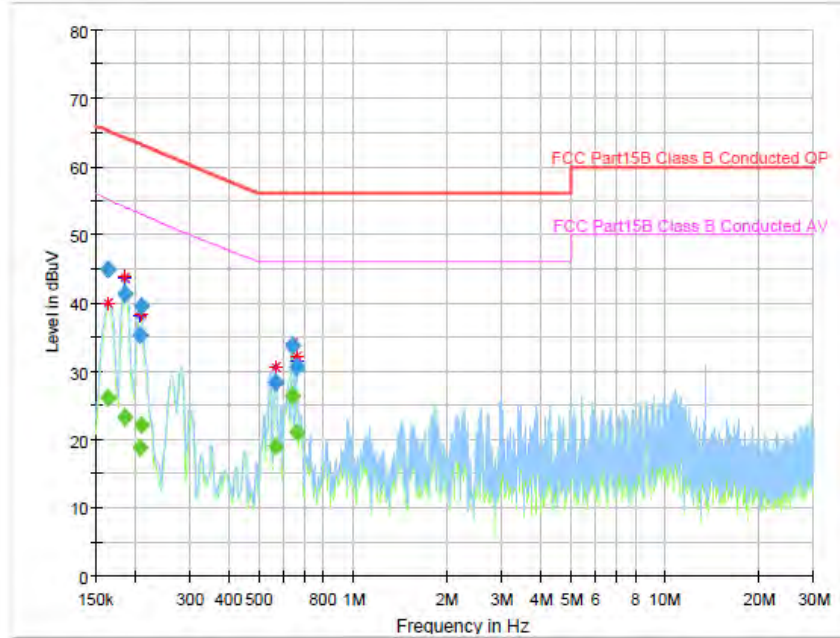


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.164925	---	26.09	55.14	29.05	1000.0	9.000	L1	9.9
0.164925	45.01	---	65.21	20.21	1000.0	9.000	L1	9.9
0.185820	---	23.29	54.08	30.79	1000.0	9.000	L1	9.9
0.185820	41.29	---	64.22	22.93	1000.0	9.000	L1	9.9
0.206715	---	18.86	53.14	34.28	1000.0	9.000	L1	9.9
0.206715	35.24	---	63.34	28.10	1000.0	9.000	L1	9.9
0.209700	---	22.05	53.02	30.97	1000.0	9.000	L1	9.8
0.209700	39.60	---	63.22	23.62	1000.0	9.000	L1	9.8
0.564915	---	18.94	46.00	27.06	1000.0	9.000	L1	9.9
0.564915	28.27	---	56.00	27.73	1000.0	9.000	L1	9.9
0.639540	---	26.33	46.00	19.67	1000.0	9.000	L1	9.9
0.639540	33.79	---	56.00	22.21	1000.0	9.000	L1	9.9
0.660435	---	21.11	46.00	24.89	1000.0	9.000	L1	9.9
0.660435	30.69	---	56.00	25.31	1000.0	9.000	L1	9.9

Plot 7-104. Line Conducted Plot (L1) ANT 2 – CH 9

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 80 of 82

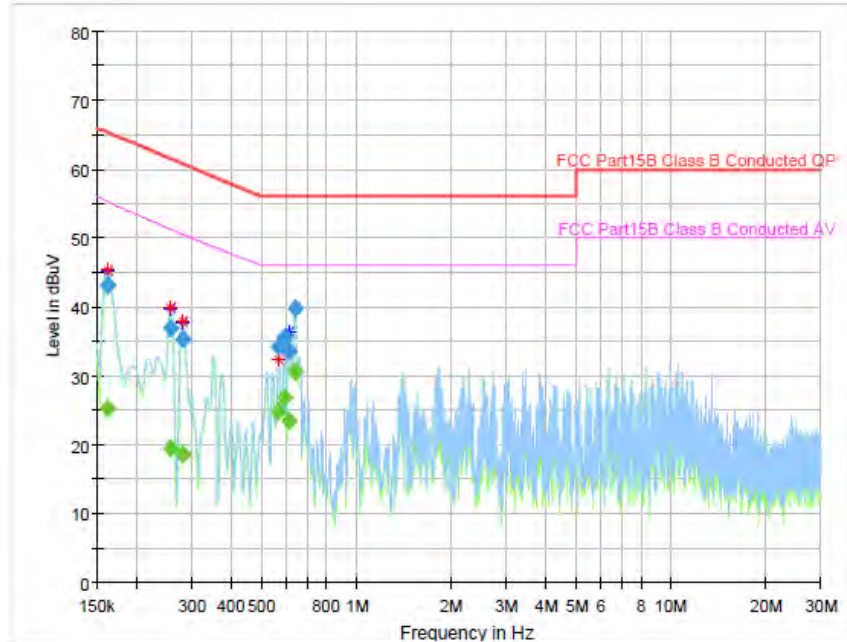

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.161940	---	25.24	55.30	30.06	1000.0	9.000	N	9.9
0.161940	43.12	---	65.36	22.24	1000.0	9.000	N	9.9
0.257460	---	19.54	51.27	31.73	1000.0	9.000	N	9.7
0.257460	36.94	---	61.51	24.57	1000.0	9.000	N	9.7
0.281340	---	18.58	50.53	31.95	1000.0	9.000	N	9.7
0.281340	35.35	---	60.78	25.42	1000.0	9.000	N	9.7
0.567900	---	24.87	46.00	21.13	1000.0	9.000	N	9.9
0.567900	34.16	---	56.00	21.84	1000.0	9.000	N	9.9
0.591780	---	26.77	46.00	19.23	1000.0	9.000	N	9.9
0.591780	35.49	---	56.00	20.51	1000.0	9.000	N	9.9
0.612675	---	23.53	46.00	22.47	1000.0	9.000	N	9.9
0.612675	33.55	---	56.00	22.45	1000.0	9.000	N	9.9
0.639540	---	30.57	46.00	15.43	1000.0	9.000	N	9.9
0.639540	39.79	---	56.00	16.21	1000.0	9.000	N	9.9

Plot 7-105. Line Conducted Plot (N) ANT 2 – CH 9

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 81 of 82

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS918JPN** has been tested to comply with the requirements specified in §15.519 and §15.521 of the FCC rules.

FCC ID: A3LSMS918JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212080137-08-R1.A3L	Test Dates: 10/5 – 12/16/2022	EUT Type: Portable Handset	Page 82 of 82