



# ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.381.1520  
<http://www.element.com>

## MEASUREMENT REPORT FCC Part 15.407 802.11a/ax/be WiFi 6E (OFDM)

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
8/22 – 11/09/2023  
**Test Report Issue Date:**  
11/27/2023  
**Test Site/Location:**  
Element lab., Columbia, MD, USA  
**Test Report Serial No.:**  
1M2308210093-15-R1.A3L


<b>FCC ID:</b>	<b>A3LSMS928B</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

**Application Type:** Certification  
**Model:** SM-S928B/DS  
**Additional Model(s):** SM-S928B  
**EUT Type:** Portable Handset  
**Frequency Range:** 5935 – 7115MHz  
**Modulation Type:** OFDM  
**FCC Classification:** 15E 6GHz Low Power Dual Client (6CD)  
**FCC Rule Part(s):** Part 15 Subpart E (15.407)  
**Test Procedure(s):** ANSI C63.10-2013, KDB 987594 D02 v01r01,  
KDB 648474 D03 v01r04

Note: This revised Test Report (S/N: 1M2308210093-15-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 RJ Ortanez  
 Executive Vice President



<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 1 of 158

## T A B L E O F C O N T E N T S

1.0	INTRODUCTION .....	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	9
2.4	Test Configuration.....	9
2.5	Software and Firmware .....	9
2.6	EMI Suppression Device(s) / Modifications.....	9
3.0	DESCRIPTION OF TESTS .....	10
3.1	Evaluation Procedure .....	10
3.2	AC Line Conducted Emissions .....	10
3.3	Radiated Emissions.....	11
3.4	Environmental Conditions.....	11
4.0	ANTENNA REQUIREMENTS .....	12
5.0	MEASUREMENT UNCERTAINTY .....	13
6.0	TEST EQUIPMENT CALIBRATION DATA.....	14
7.0	TEST RESULTS .....	15
7.1	Summary.....	15
7.2	26dB Bandwidth Measurement.....	17
7.3	UNII Output Power Measurement.....	43
7.4	Maximum Power Spectral Density .....	51
7.5	In-Band Emissions .....	87
7.6	Contention Based Protocol.....	122
7.6.1	AWGN Plot .....	126
7.6.2	CBP Timing Plots .....	127
7.6.3	Channel Move Plots.....	135
7.7	Radiated Emission Measurements .....	137
7.7.1	MIMO Radiated Spurious Emission Measurements .....	141
7.7.2	MIMO Radiated Band Edge Measurements (20MHz BW).....	146
7.7.3	MIMO Radiated Band Edge Measurements (40MHz BW).....	147
7.7.4	MIMO Radiated Band Edge Measurements (80MHz BW).....	148
7.7.5	MIMO Radiated Band Edge Measurements (160MHz BW).....	149
7.7.6	MIMO Radiated Band Edge Measurements (320MHz BW).....	150
7.8	Line Conducted Test Data.....	151
8.0	CONCLUSION.....	158

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 2 of 158

## MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	MIMO	
			Max. Power [mW]	Max. Power [dBm]
20	5	5935 - 6415	11.75	10.70
	6	6435 - 6515	8.23	9.15
	7	6535 - 6875	9.83	9.93
	8	6895 - 7115	8.59	9.34
40	5	5965 - 6405	20.90	13.20
	6	6445 - 6525	16.11	12.07
	7	6565 - 6845	16.71	12.23
	8	6885 - 7085	18.14	12.59
80	5	5985 - 6385	44.99	16.53
	6	6465	34.69	15.40
	7	6545 - 6865	38.97	15.91
	8	6945 - 7025	37.30	15.72
160	5	6025 - 6345	57.75	17.62
	6	6505	47.75	16.79
	7	6665 - 6825	50.32	17.02
	8	6985	50.32	17.02
320	5	6105 - 6265	55.29	17.43
	6	6425	42.64	16.30
	7	6585 - 6745	46.26	16.65
	8	6905	44.60	16.49

**EUT Overview - LPI**

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	MIMO	
			Max. Power [mW]	Max. Power [dBm]
20	5	5935 - 6415	59.03	17.71
	7	6535 - 6875	48.17	16.83
40	5	5965 - 6405	57.82	17.62
	7	6565 - 6845	46.99	16.72
80	5	5985 - 6385	139.19	21.44
	7	6545 - 6865	149.00	21.73
160	5	6025 - 6345	154.00	21.88
	7	6665 - 6825	148.50	21.72
320	5	6105 - 6265	147.44	21.69
	7	6585 - 6745	151.44	21.80

**EUT Overview - SP**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 3 of 158

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO\IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 4 of 158

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Electronics Co., Ltd. Portable Handset FCC: A3LSMS928B**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

**Test Device Serial No.:** 0735M, 0734M, 1498M, 1133M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
2	5935	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a/ax/be (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 5 of 158

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
47	6185			175	6825		
79	6345						

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
31	6105	95	6425	127	6585	191	6905
63	6265			159	6745		

Table 2-5. 802.11be (320MHz BW) Frequency / Channel Operations

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 6 of 158

**Notes:**

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, 160MHz and 320MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO (1+2)	
		Duty Cycle [%]	Radiated DCCF [dB]
6GHz	a	96.62	0.15
	ax (HE20)	99.65	N/A
	be (EHT20)	99.65	N/A
	ax (HE40)	99.67	N/A
	be (EHT40)	99.67	N/A
	ax (HE80)	99.67	N/A
	be (EHT80)	99.67	N/A
	ax (HE160)	99.67	N/A
	be (EHT160)	99.67	N/A
	be (EHT320)	99.67	N/A

**Table 2-6. Measured Duty Cycles**

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
6GHz	11a	✓	✓	✓	✓	✗	✗
	11ax	✓	✓	✓	✓	✓	✓
	11be	✓	✓	✓	✓	✓	✓

**Table 2-7. Antenna / Technology Configurations**

✓= Support; ✗= NOT Support  
**SISO** = Single Input Single Output  
**SDM** = Spatial Diversity Multiplexing – MIMO function  
**CDD** = Cyclic Delay Diversity – 2Tx Function

- The device supports the following data rates (shown in Mbps):

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 7 of 158

802.11a	Spatial Stream	OFDM (802.11ax/be)														
		20MHz			40MHz			80MHz			160MHz			320MHz		
		0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI
6	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3	144.1	136.1	122.5
9	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	288.2	272.2	245
12	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8	432.4	408.3	367.5
18	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	576.5	544.4	490
24	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	864.7	816.7	735
36	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	1152.9	1088.9	980
48	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3	1297.1	1225	1102.5
54	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5	1441.2	1361.1	1225
	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	1729.4	1633.3	1470
	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7	1921.6	1814.8	1633.3
	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8	2402	2268.5	2041.7
	1	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5	2594.1	2450	2205
	1	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225	2882.4	2722.2	2450
6	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	288.2	272.2	245
9	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	576.5	544.4	490
12	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	864.7	816.7	735
18	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	1152.9	1088.9	980
24	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	1729.4	1633.3	1470
36	2	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980	2305.9	2177.8	1960
48	2	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5	2594.1	2450	2205
54	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225	2882.4	2722.2	2450
	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470	3458.8	3266.7	2940
	2	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3	3843.1	3629.6	3266.7
	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5	4323.5	4083.3	3675
	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7	4803.9	4537	4083.3
	2	309.7	292.5	263.3	619.4	585	526.5	1297.1	1225	1102.5	2594.1	2450	2205	5188.2	4900	4410
	2	344.1	325	292.5	688.2	650	585	1441.2	1361.1	1225	2882.4	2722.2	2450	5764.7	5444.4	4900

**Table 2-8. Supported Data Rates**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 8 of 158





### 2.3 Antenna Description

The following antenna gains are used in this device per the "Unlicensed Band Antenna Gain" document provided by the client. This document is also included in the filing as a public exhibit.

Frequency	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 MHz	-5.08	-3.51	-1.25
6025 MHz	-6.16	-3.51	-1.72
6125 MHz	-5.69	-4.03	-1.81
6325 MHz	-6.15	-4.69	-2.38
6425 MHz	-5.93	-4.21	-2.02
6525 MHz	-6.31	-4.88	-2.56
6625MHz	-6.53	-4.94	-2.69
6725MHz	-7.03	-5.35	-3.14
6825MHz	-6.90	-3.96	-2.30
6925MHz	-7.12	-4.40	-2.64
7025MHz	-6.72	-3.50	-1.95
7125MHz	-8.11	-3.15	-2.27

**Table 2-9 Antenna Peak Gain per Frequency**

	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 – 6425 MHz	-5.08	-3.51	-1.25
6425 – 6525 MHz	-5.93	-4.21	-2.02
6525 – 6875 MHz	-6.90	-3.96	-2.30
6875 – 7125 MHz	-6.72	-3.50	-1.95

**Table 2-10. Antenna Peak Gain**

### 2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 987594 D02 v01r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

This device operates in the 5.925-7.125 GHz band when under control of a low power indoor access point. Additionally, the device may operate in the 5.925-6.425 GHz and 6.525-6.875 GHz bands when under control of a standard power access point.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.5 Software and Firmware

The test was conducted with firmware version S928BXXU0AWH9 installed on the EUT.

### 2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 9 of 158

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 987594 D02 v01r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 10 of 158

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precautions were taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height were noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 11 of 158

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 12 of 158

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Contention Based Protocol Conducted Measurements	0.86
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 13 of 158

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	ETS-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-001
-	ETS-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-002
-	MD 1M 18-40	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	MD 1M 18-40
-	WL40-1	Conducted Cable Set (40GHz)	1/12/2023	Annual	1/12/2024	WL40-1
-	WL25-1	Conducted Cable Set (25GHz)	1/12/2023	Annual	1/12/2024	WL25-1
Anritsu	MA24406A	Microwave Peak Power Sensor	9/7/2023	Annual	9/7/2024	11240
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/5/2022	Biennial	7/5/2024	9203-2178
Pasternack	MNLC-2	Line Conducted Emission Cable (NM)	1/11/2023	Annual	1/11/2024	MNLC-2
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	8/11/2022	Biennial	8/11/2024	114451
ETS Lindgren	3116C	1-18 GHz DRG Horn Antenna	2/27/2023	Biennial	2/27/2024	00218893
ETS Lindgren	3115	Double Ridged Guide Horn	4/12/2022	Biennial	4/12/2024	82333
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2025	121034
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2023	Annual	3/15/2024	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	3/15/2023	Annual	3/15/2024	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	1/31/2023	Annual	1/31/2024	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/7/2023	Annual	9/7/2024	MY57141001
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/11/2023	Annual	9/11/2024	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/1/2023	Annual	3/1/2024	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	11/6/2022	Annual	11/6/2023	103187
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	1/13/2023	Annual	1/13/2024	103200
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	2/21/2023	Biennial	2/21/2025	A051107
Sunol	JB6	LB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 14 of 158

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS928B  
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046, 15.407(a)(11)	Maximum Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.3
15.407(a)(8)	Maximum Radiated Output Power	< 24dBm over the frequency band of operation		PASS	Section 7.3
2.1049, 15.407(a)(10)	Occupied Bandwidth/ 26dB Bandwidth	The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.		PASS	Section 7.2
15.407(a)(8)	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p.		PASS	Section 7.4
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7)		PASS	Section 7.5
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7
15.407(b)(9)	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.8

**Table 7-1. Summary of Test Results**

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 15 of 158

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) Per 15.407(a)(7), a device operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands must not have the maximum power spectral density exceed 17 dBm/MHz e.i.r.p., must limit the maximum e.i.r.p. over the frequency band of operation does not exceed 30 dBm, and must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power. Compliance to this clause is addressed via submission of an attestation following Appendix B of KDB 987594 D01 v01r03.
- 5) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.
- 6) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 16 of 158



## 7.2 26dB Bandwidth Measurement

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

### Test Procedure Used

ANSI C63.10-2013 – Section 12.4

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

All cases were investigated; a subset of the taken plots were included to represent relevant settings and measurements.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 17 of 158


	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]
Band 5	5935	2	a	23.44	22.74
	6175	45	a	23.31	23.55
	6415	93	a	23.35	23.02
	5935	2	ax (20MHz)	22.99	24.18
	6175	45	ax (20MHz)	23.30	23.45
	6415	93	ax (20MHz)	23.47	22.72
	5695	3	ax (40MHz)	43.37	44.28
	6165	43	ax (40MHz)	44.65	44.00
	6405	91	ax (40MHz)	44.03	43.52
	5985	7	ax (80MHz)	90.02	88.55
	6145	39	ax (80MHz)	90.86	90.27
	6385	87	ax (80MHz)	90.31	87.71
	6025	15	ax (160MHz)	174.45	172.25
	6185	47	ax (160MHz)	171.96	171.71
	6345	79	ax (160MHz)	174.50	172.28
6105	31	be (320MHz)*	315.81	314.73	
6265	63	be (320MHz)*	315.63	314.68	
Band 6	6345	97	a	23.75	23.69
	6475	105	a	23.83	23.16
	6515	113	a	23.29	23.40
	6345	97	ax (20MHz)	23.68	23.75
	6475	105	ax (20MHz)	22.91	23.02
	6515	113	ax (20MHz)	23.29	22.92
	6445	99	ax (40MHz)	44.34	44.21
	6485	107	ax (40MHz)	44.51	43.79
	6525	115	ax (40MHz)	45.20	45.19
	6465	103	ax (80MHz)	89.01	88.38
	6505	111	ax (160MHz)	175.57	172.19
Band 5/6/7	6425	95	be (320MHz)*	314.96	315.20
Band 7	6535	117	a	23.34	22.90
	6695	149	a	23.65	23.76
	6875	185	a	23.94	23.72
	6535	117	be (20MHz)	22.72	24.27
	6695	149	be (20MHz)	23.26	23.71
	6875	185	be (20MHz)	22.97	24.15
	6565	123	ax (40MHz)	44.07	45.05
	6725	155	ax (40MHz)	43.81	43.88
	6885	179	ax (40MHz)	45.35	43.96
	6545	119	ax (80MHz)	89.86	90.15
	6705	151	ax (80MHz)	90.15	89.48
	6865	183	ax (80MHz)	88.34	88.92
	6665	143	ax (160MHz)	176.18	174.21
	6825	175	ax (160MHz)	175.21	174.22
	Band 6/7	6585	127	be (320MHz)*	315.37
Band 7/8	6745	159	be (320MHz)*	315.15	315.44
Band 8	6895	189	a	22.98	23.56
	6995	209	a	23.64	23.35
	7115	233	a	23.88	23.39
	6895	189	be (20MHz)	23.11	23.08
	6995	209	be (20MHz)	23.25	22.85
	7115	233	be (20MHz)	22.52	23.35
	6925	187	ax (40MHz)	45.02	44.06
	7005	211	ax (40MHz)	44.48	44.15
	7085	227	ax (40MHz)	43.25	43.59
	6945	199	ax (80MHz)	90.42	87.96
	7025	215	ax (80MHz)	90.91	89.18
6985	207	ax (160MHz)	175.21	174.23	
Band 7/8	6905	191	be (320MHz)*	315.92	315.39

**Table 7-2. Summary of Bandwidth Measurements**


\*Occupied Bandwidth Measurement was used to demonstrate compliance.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 18 of 158

### MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 5)

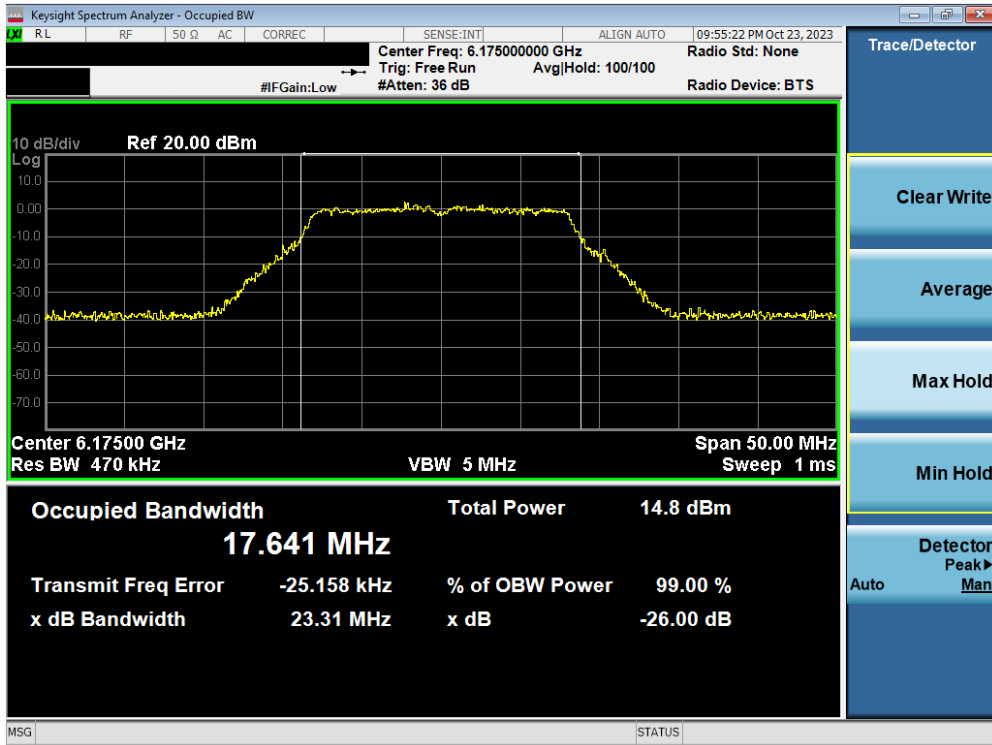


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45)

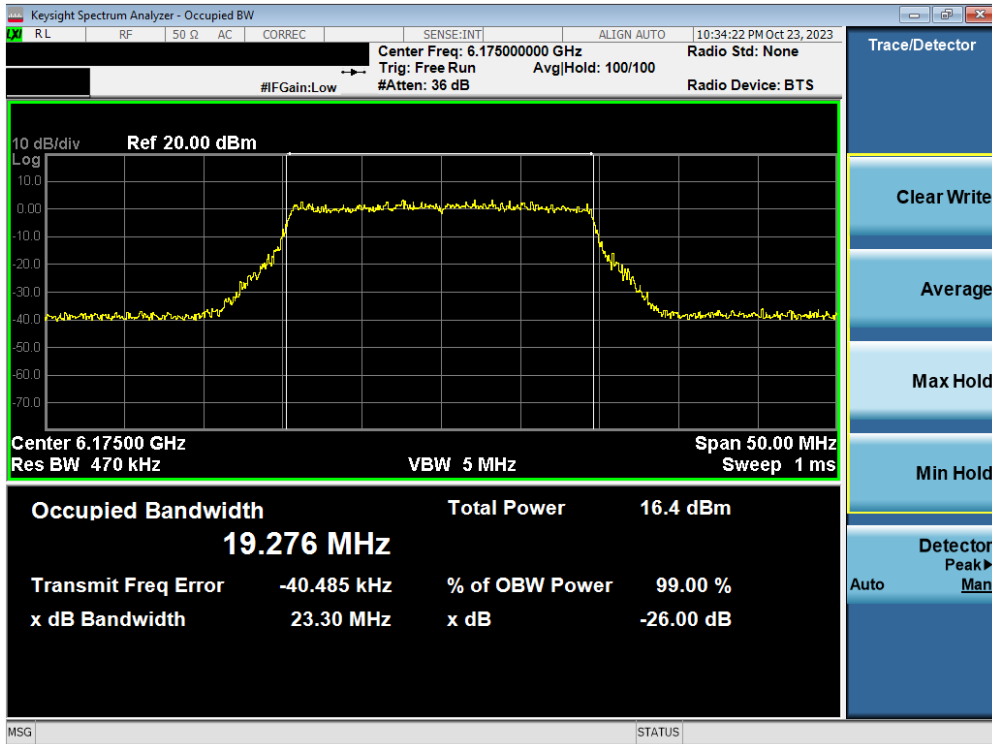


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 5) – Ch. 45)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 19 of 158

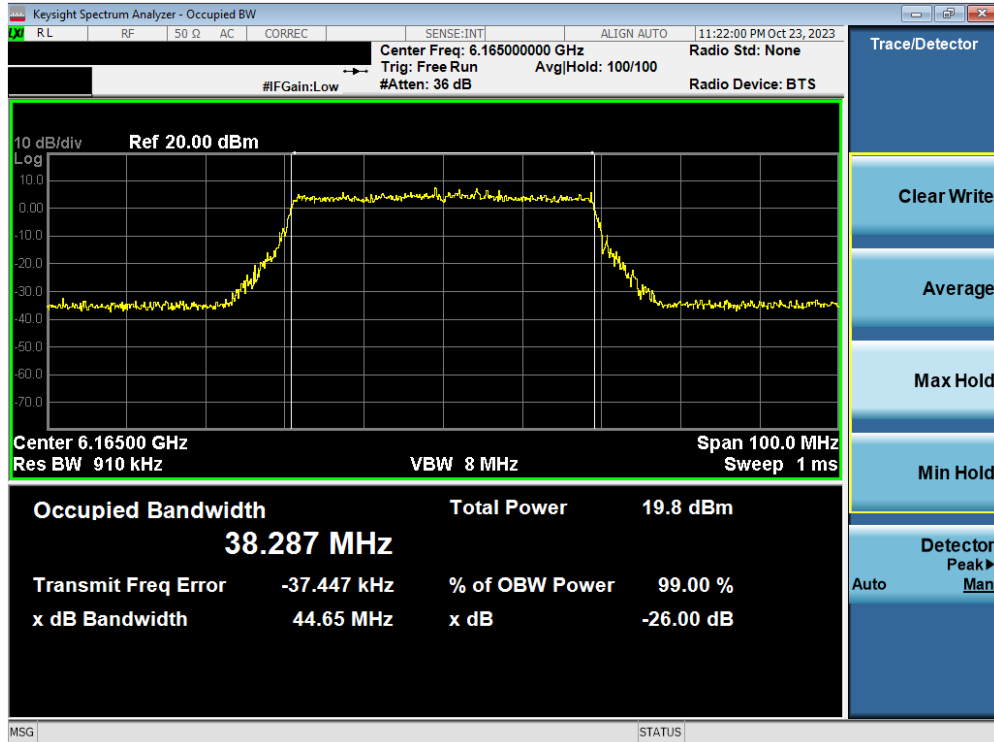


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 5) – Ch. 43)

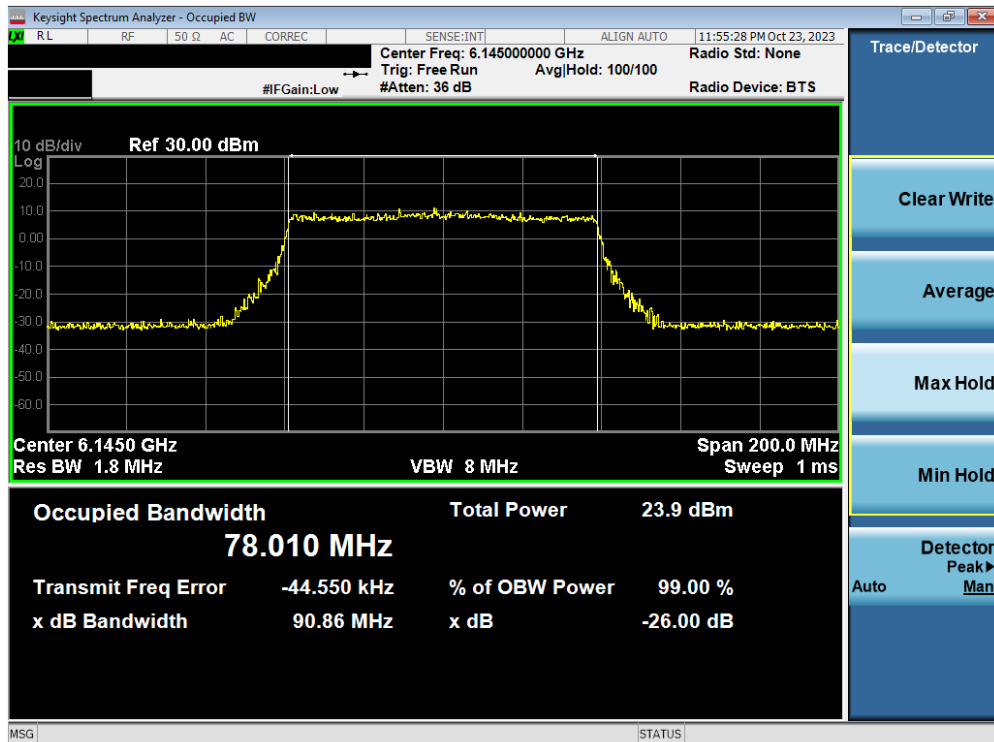


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 5) – Ch. 39)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 20 of 158

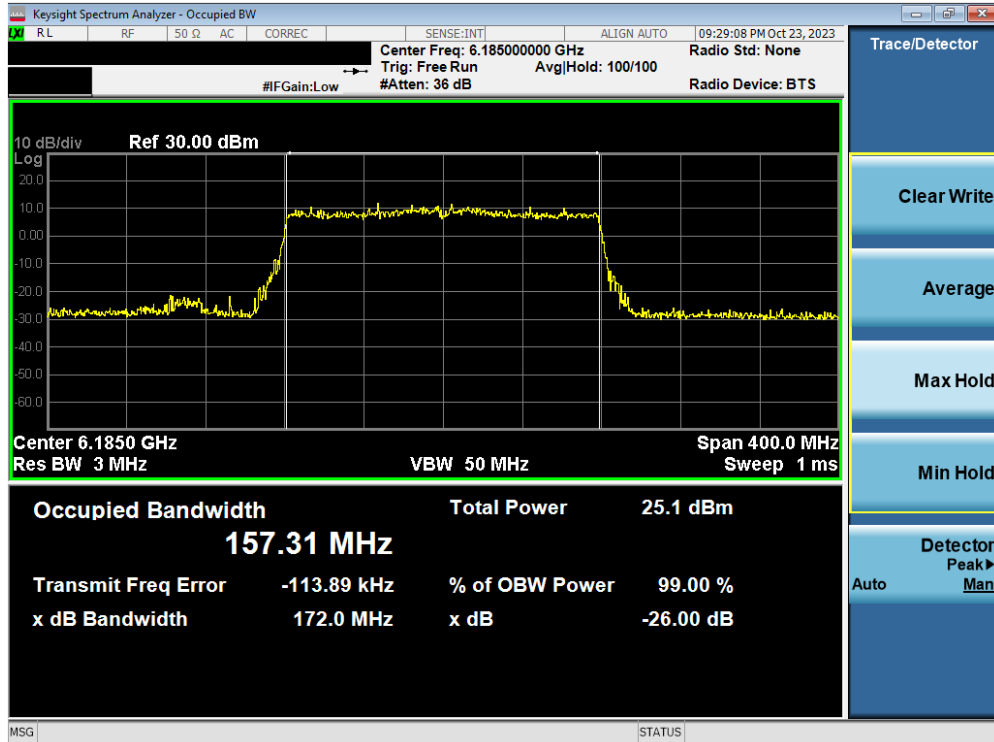


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (UNII Band 5) – Ch. 47)

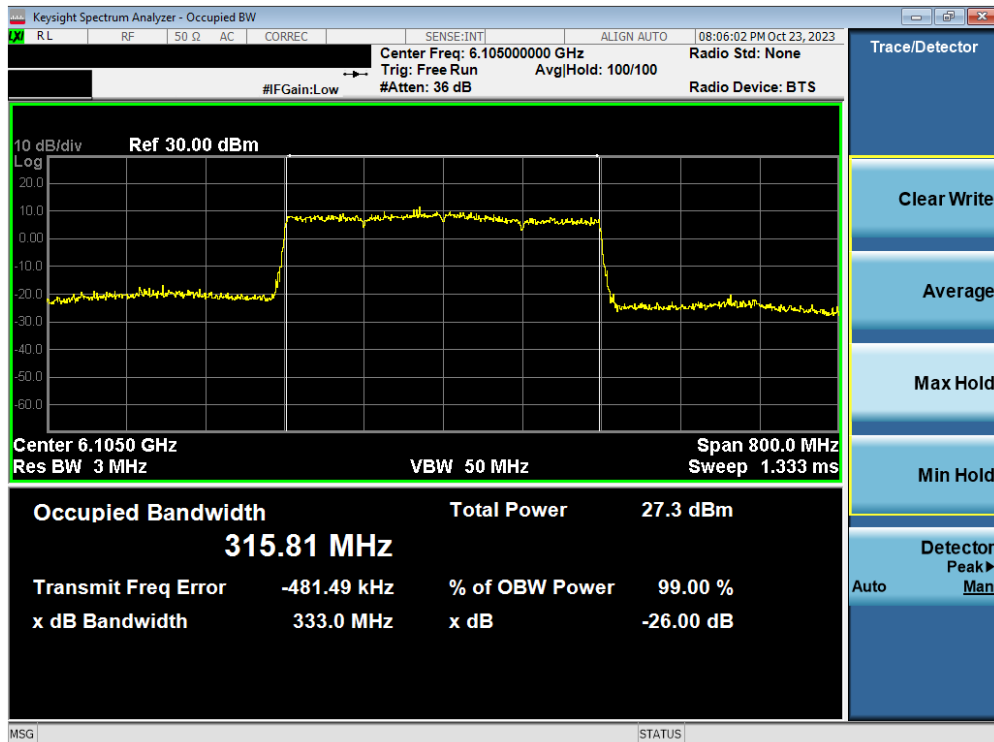


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11be (UNII Band 5) – Ch.31)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 21 of 158

### MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 6)

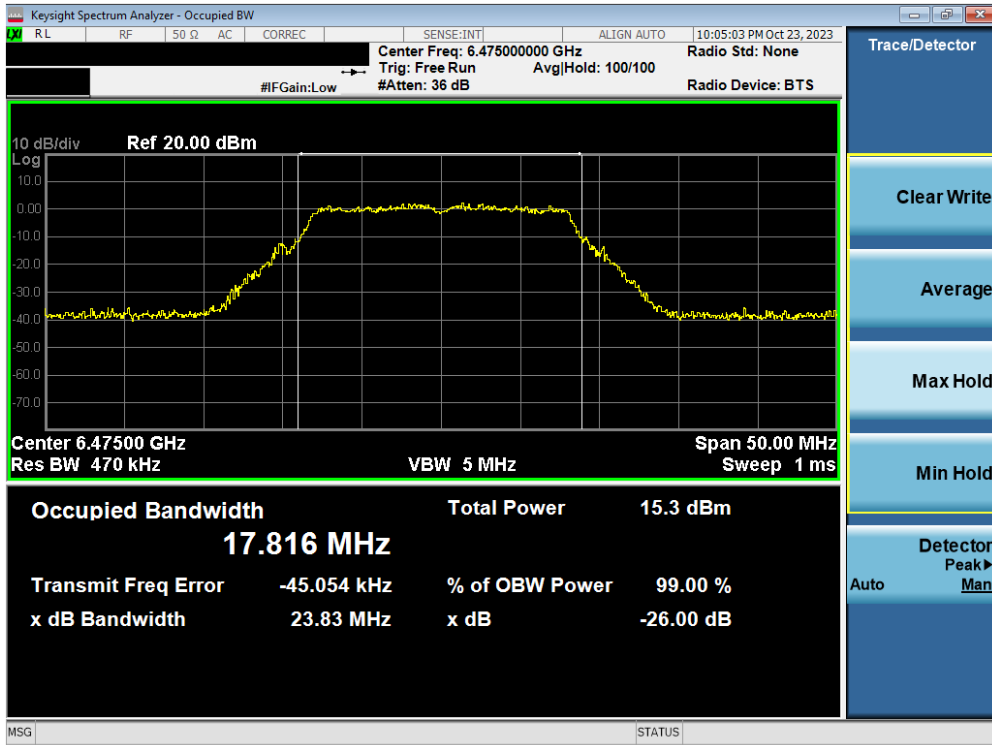


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 105)

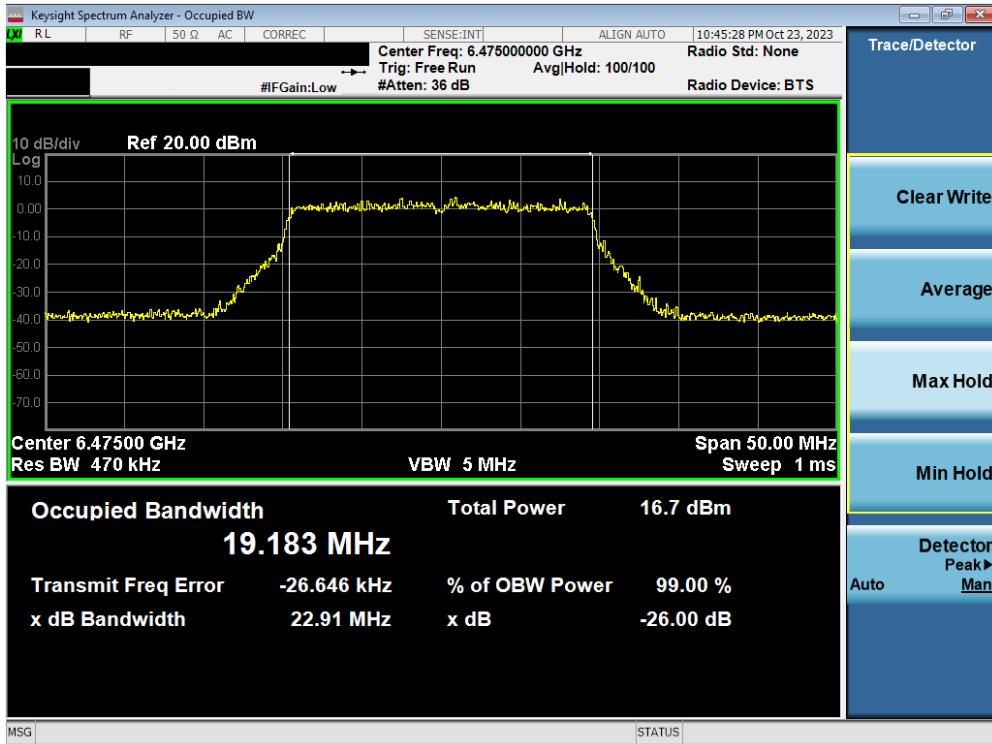


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 6) – Ch. 105)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 22 of 158

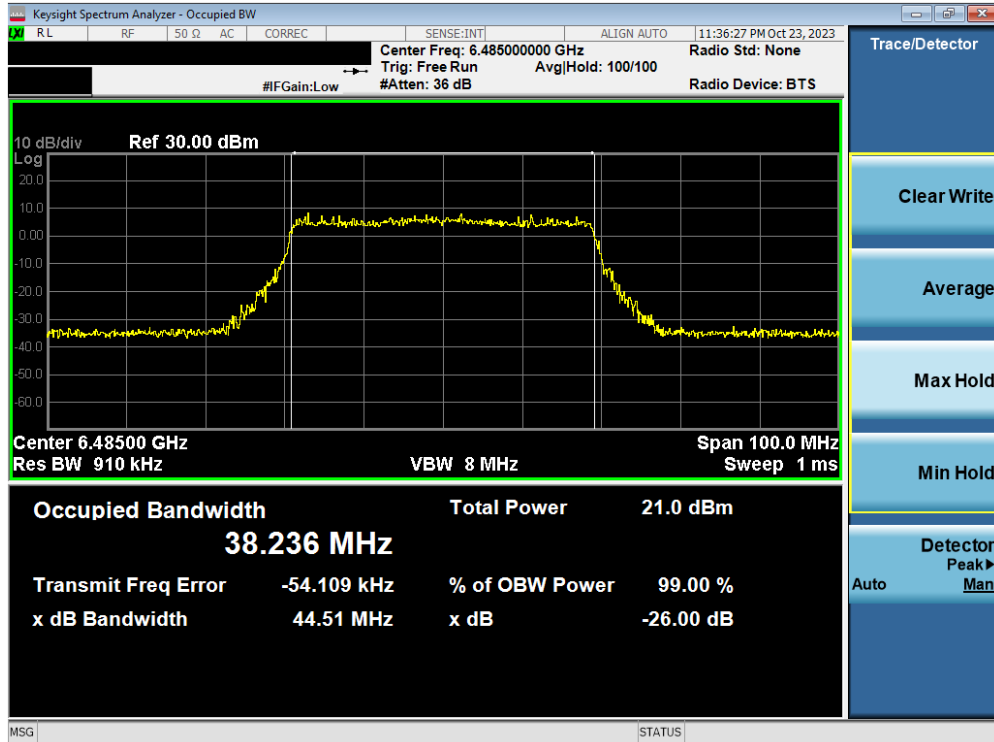


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 6) – Ch. 107)

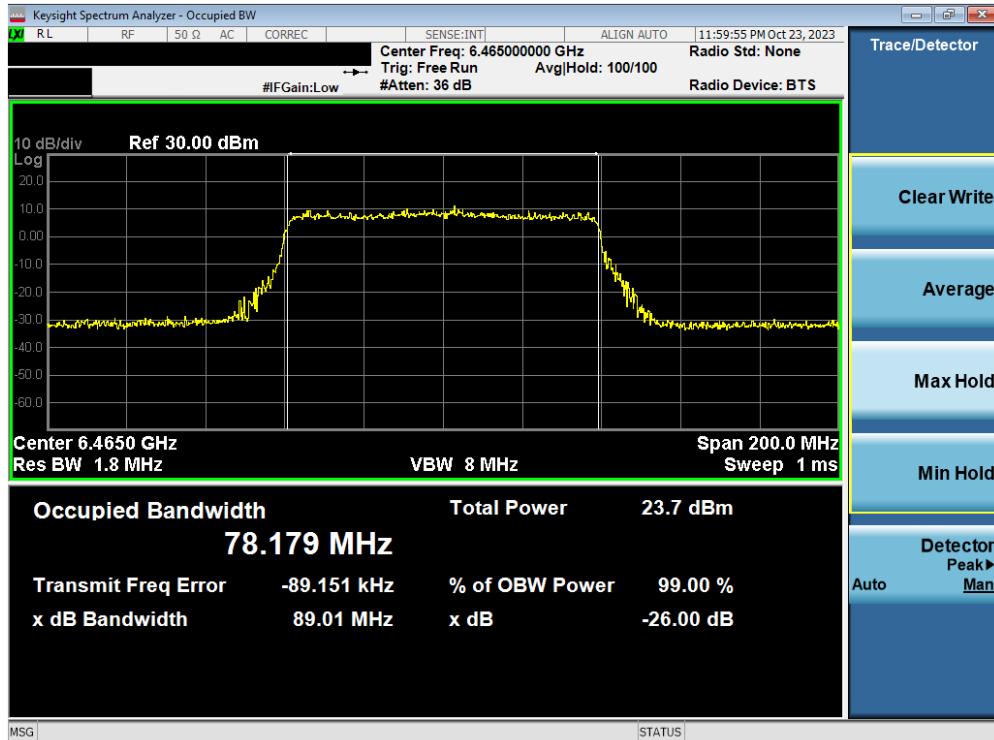


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 6) – Ch. 103)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 23 of 158

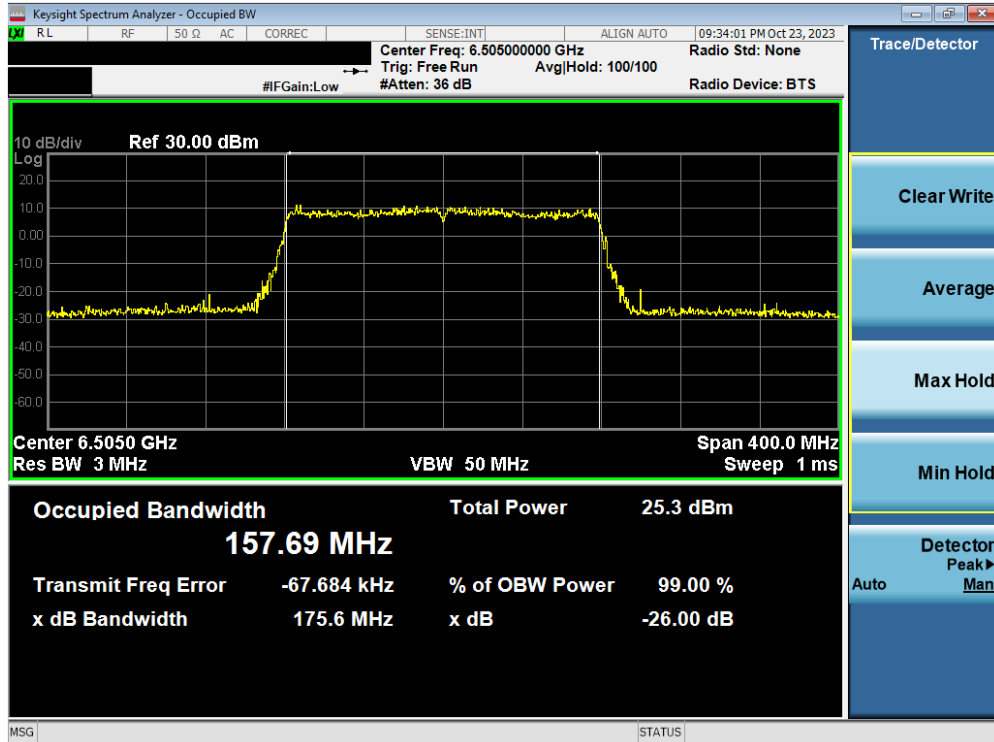

Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (UNII Band 6) – Ch. 111)

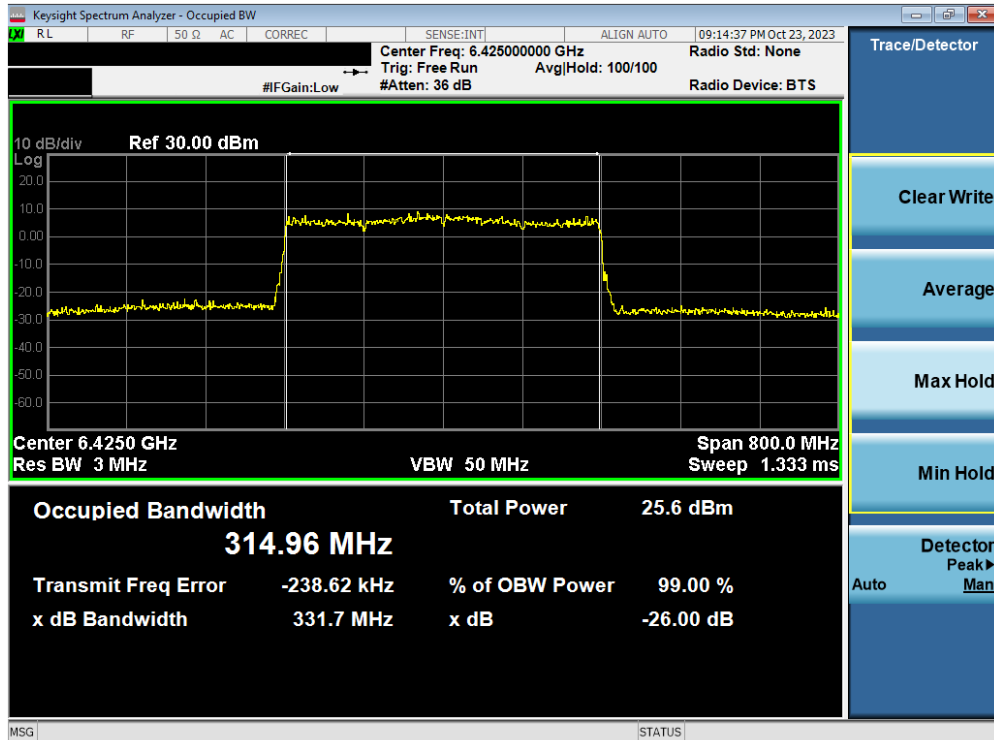


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11be (UNII Band 5/6/7) – Ch. 95)


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 24 of 158



### MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 7)

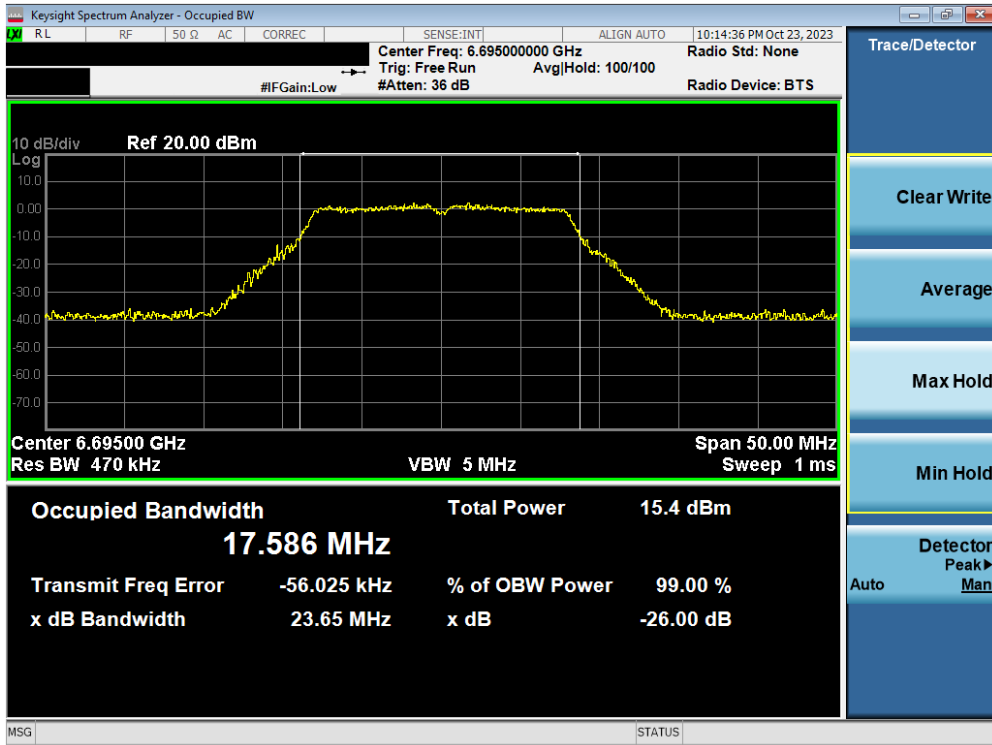


Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149)

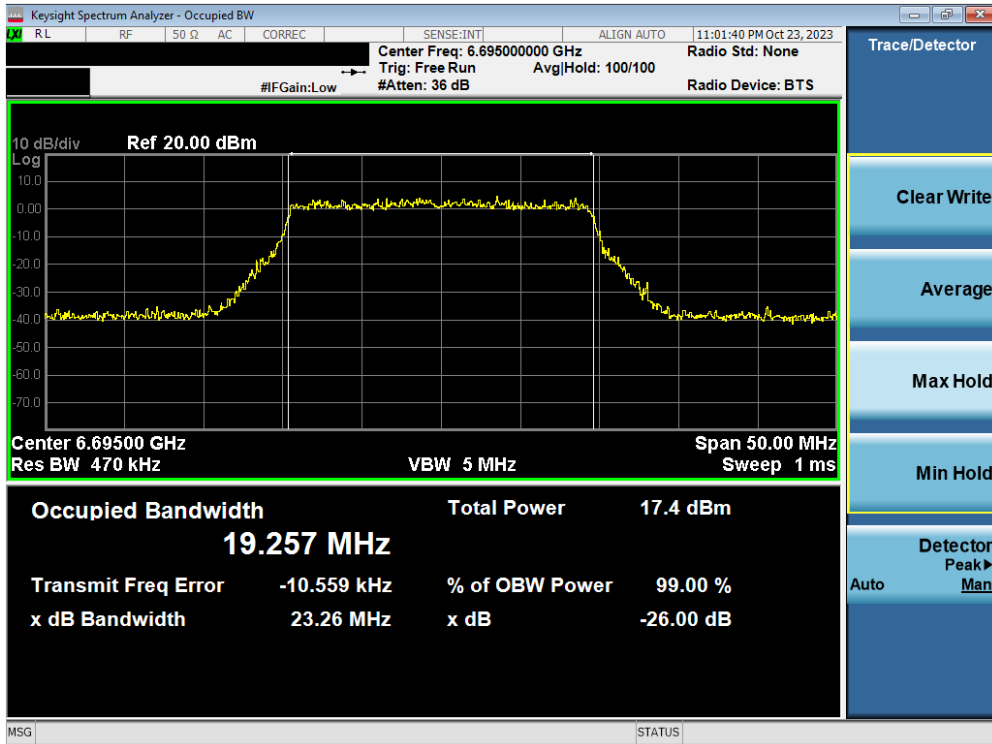


Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 7) – Ch. 149)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 25 of 158

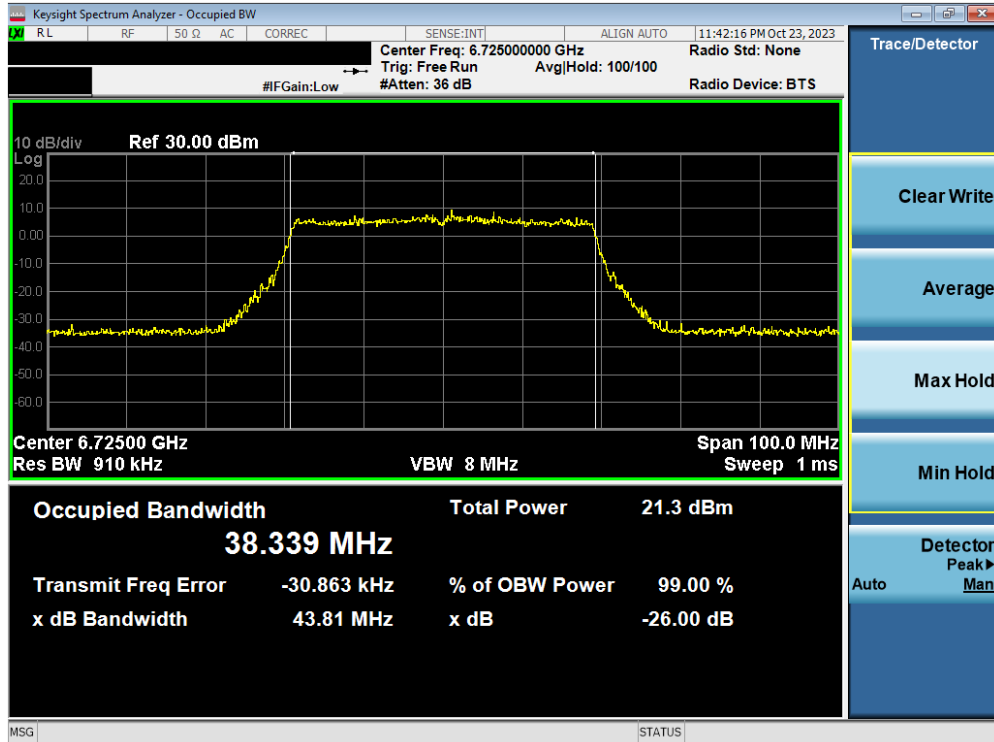


Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 7) – Ch. 155)

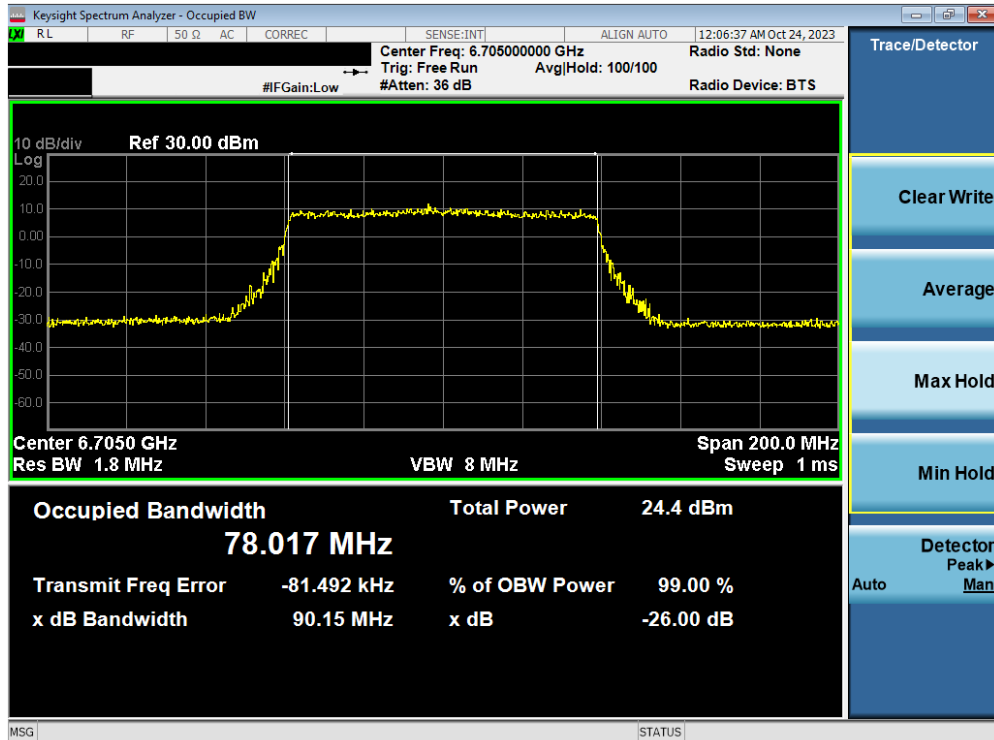


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 7) – Ch. 151)

FCC ID: A3LSMS928B		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 26 of 158	

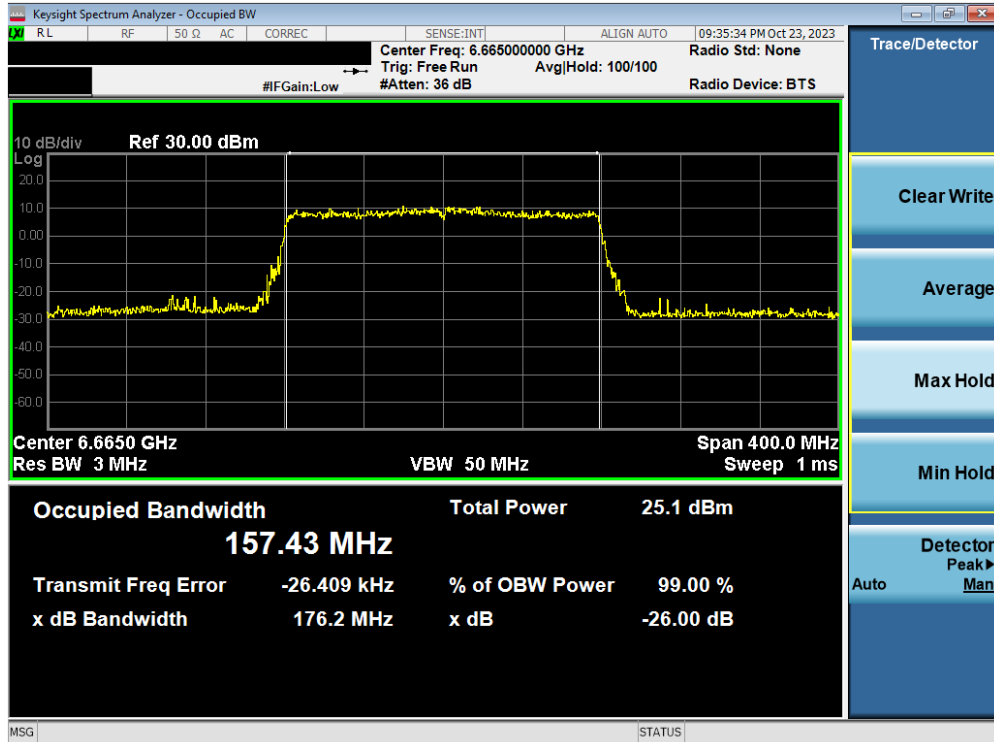


Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (UNII Band 7) – Ch. 143)

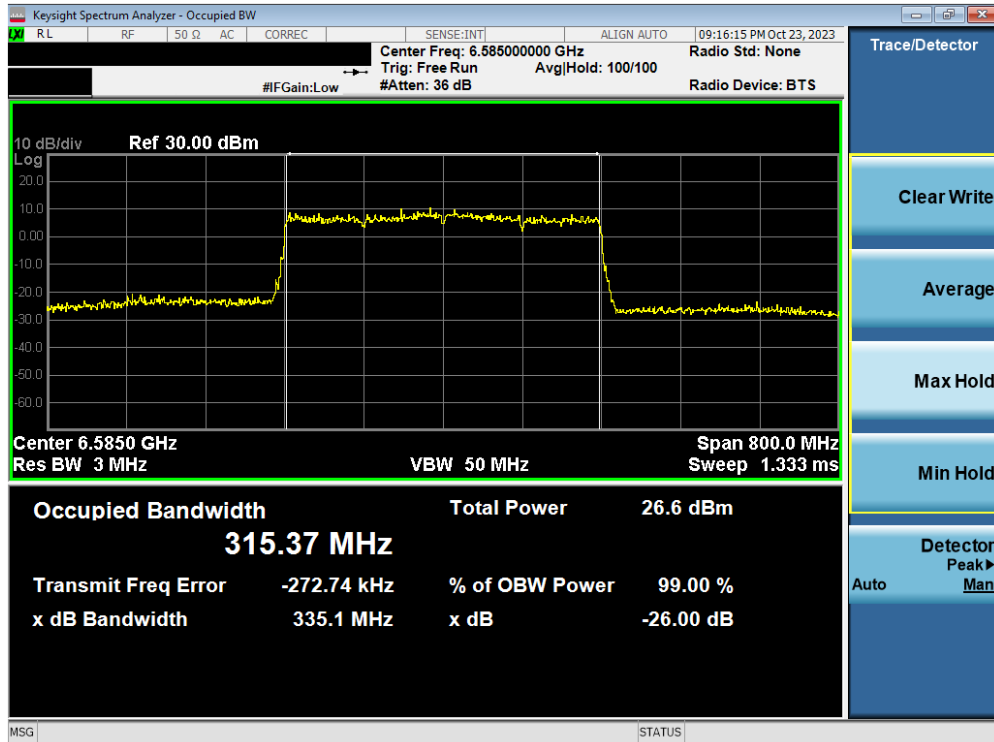


Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11be (UNII Band 6/7) – Ch. 127)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 27 of 158

### MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 8)

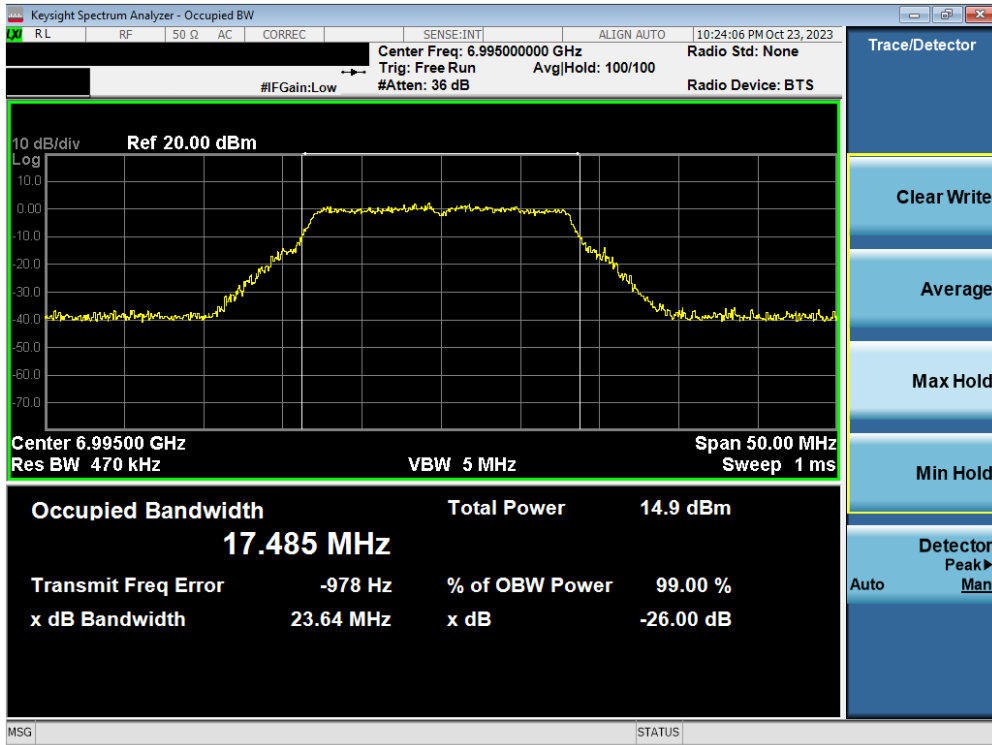


Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 209)

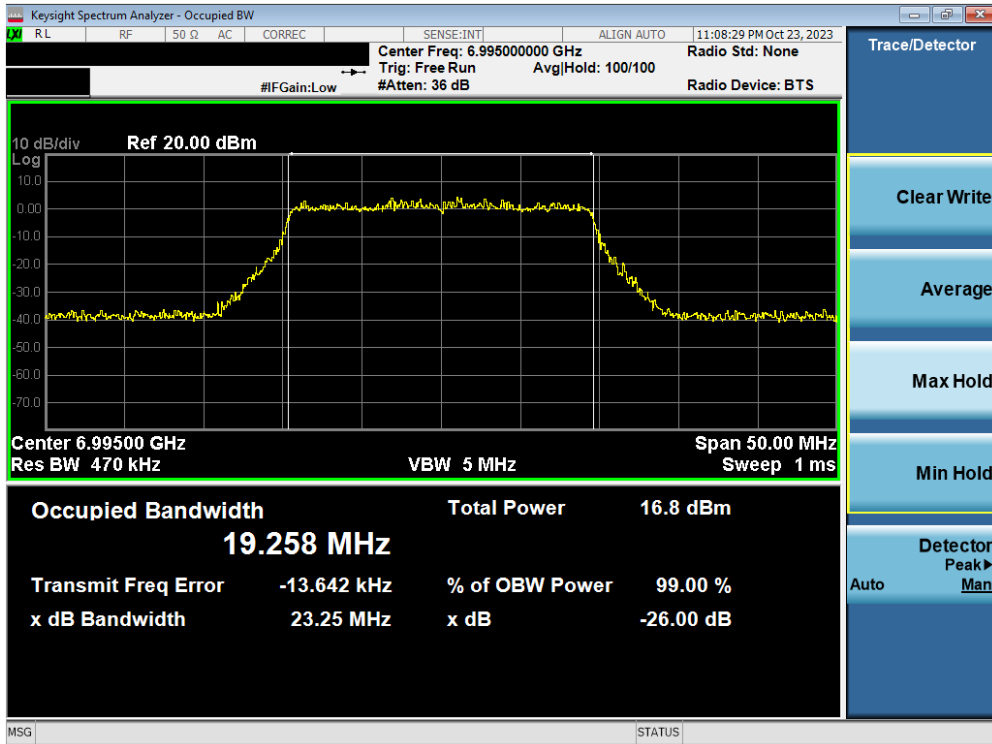


Plot 7-20. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 8) – Ch. 209)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 28 of 158

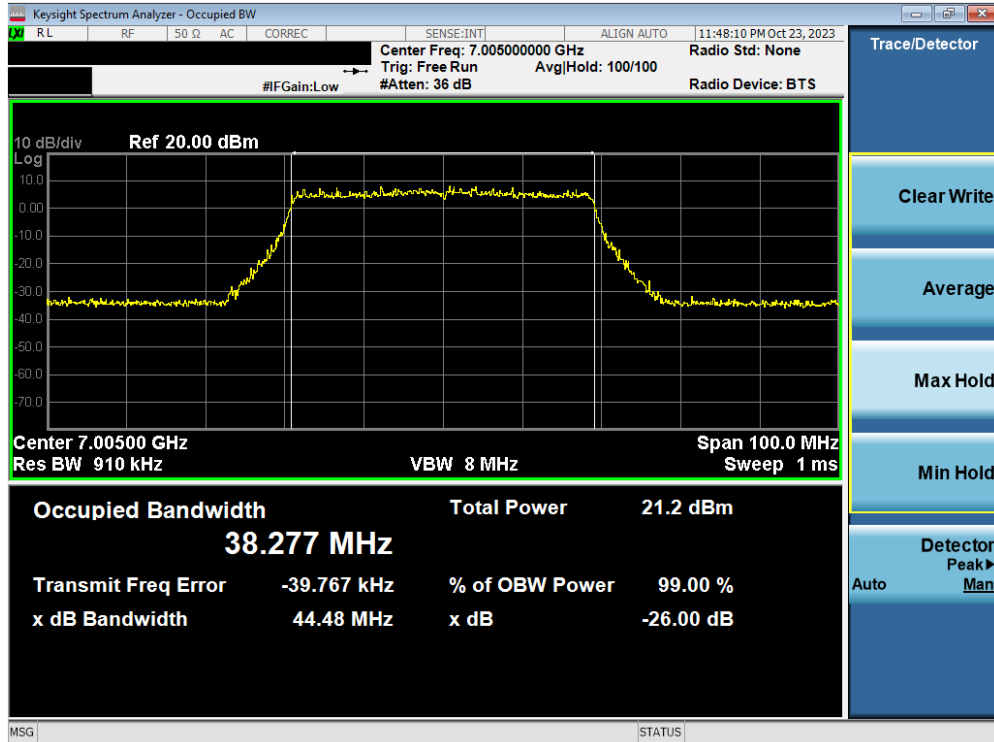


Plot 7-21. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 8) – Ch. 211)

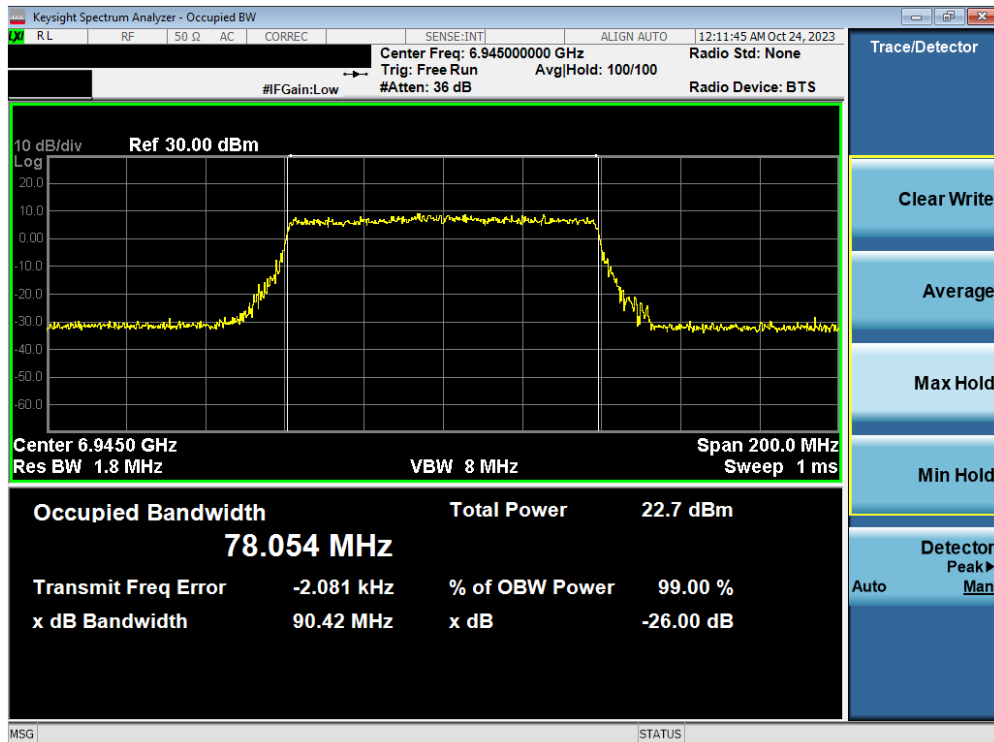


Plot 7-22. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 8) – Ch. 199)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 29 of 158

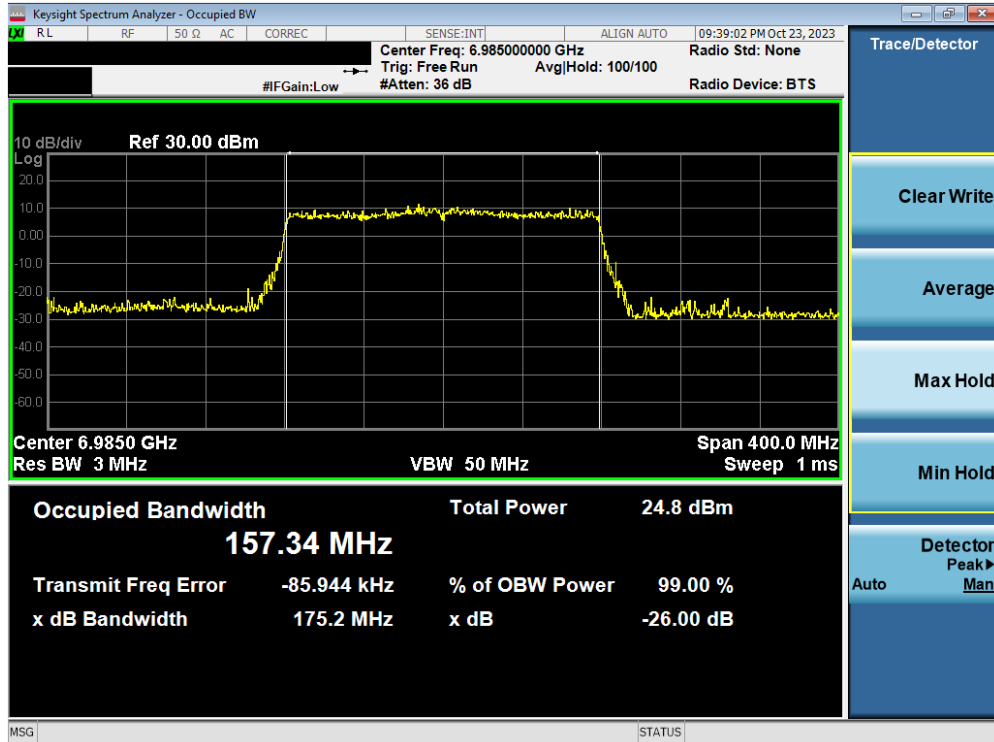


Plot 7-23. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (UNII Band 8) – Ch. 207)

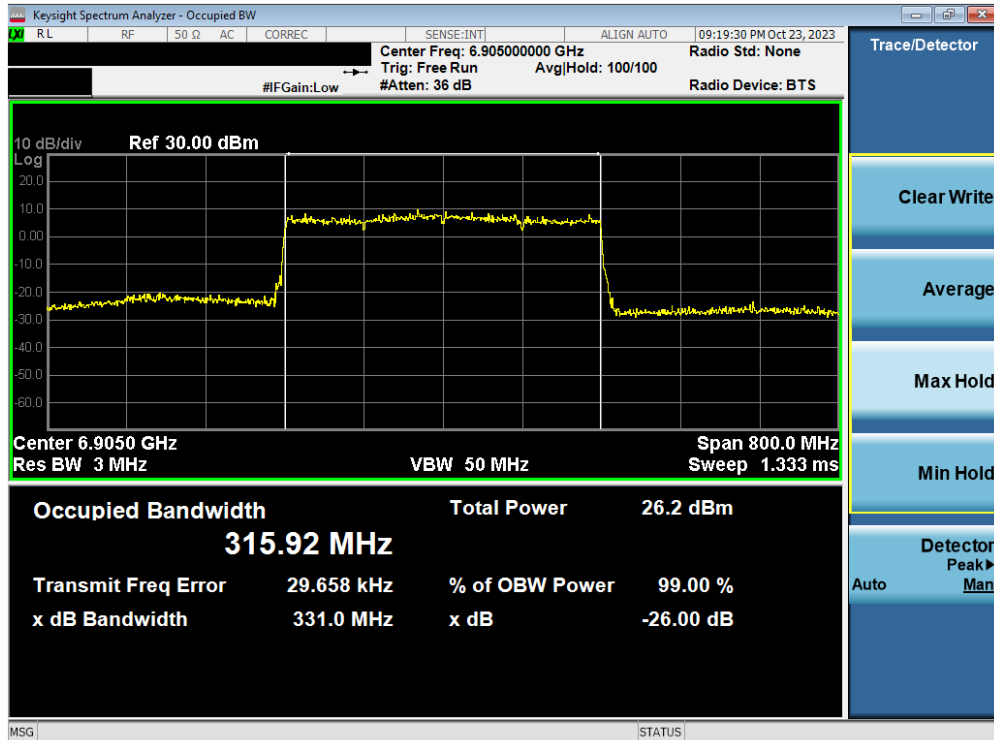


Plot 7-24. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11be (UNII Band 7/8) – Ch. 191)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 30 of 158

### MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 5)

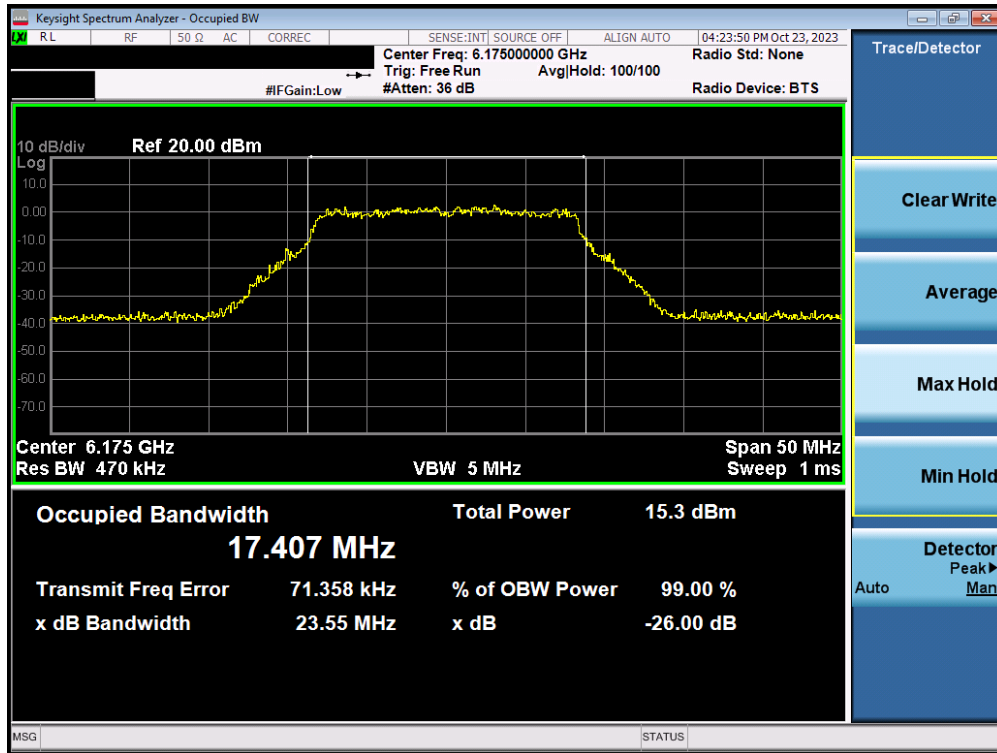


Plot 7-25. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45)

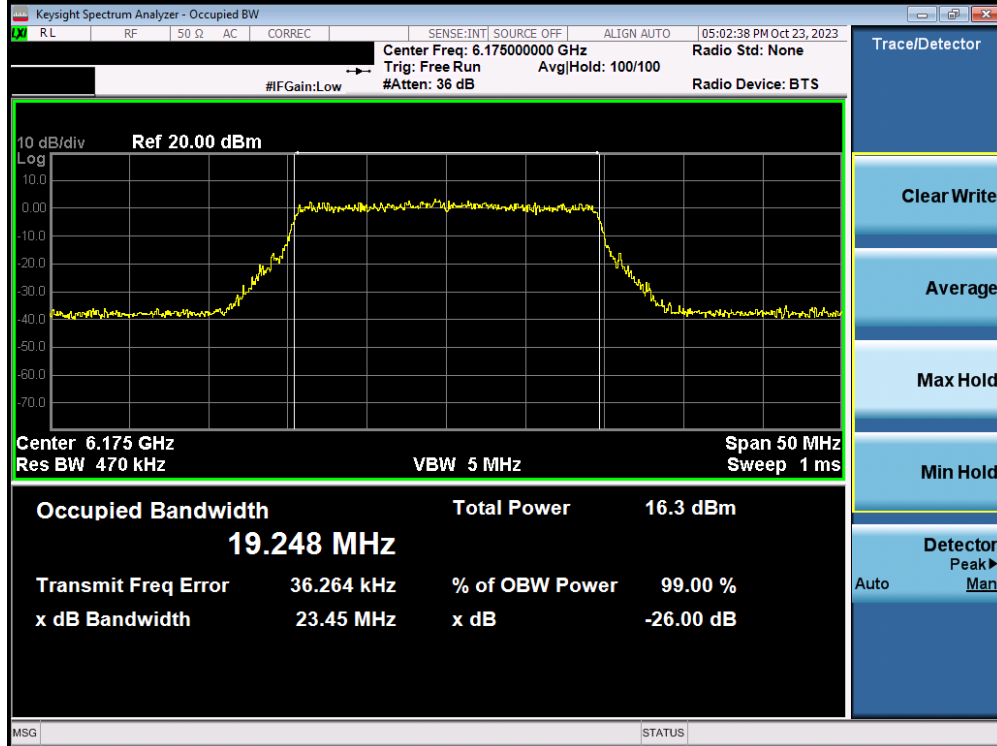


Plot 7-26. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 5) – Ch. 45)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 31 of 158

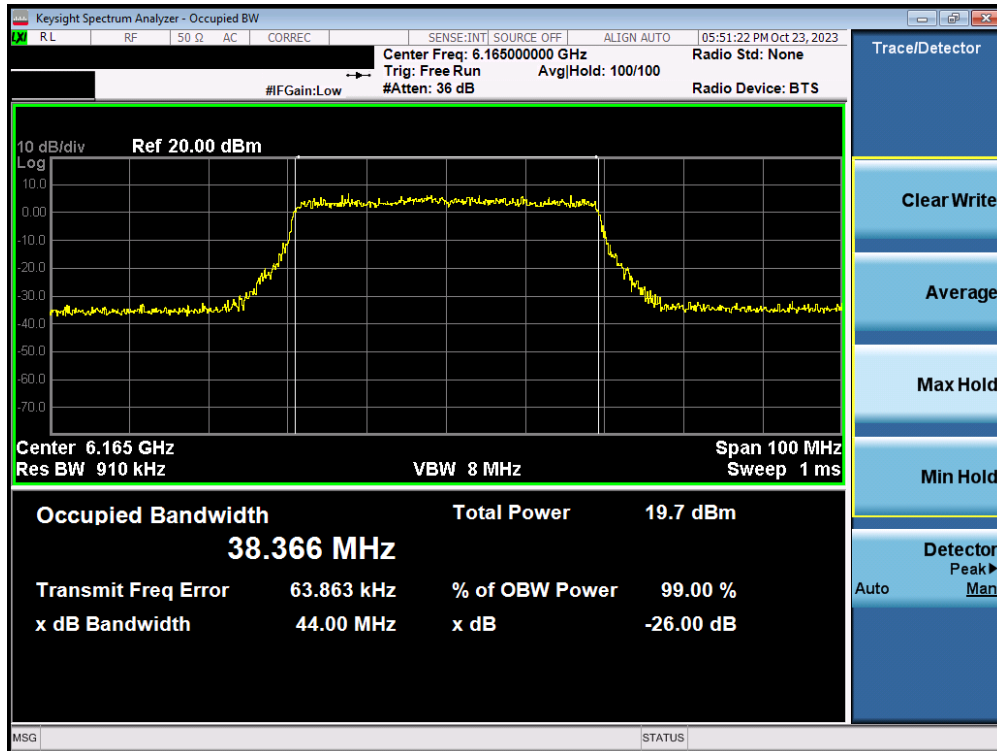


Plot 7-27. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 5) – Ch. 43)

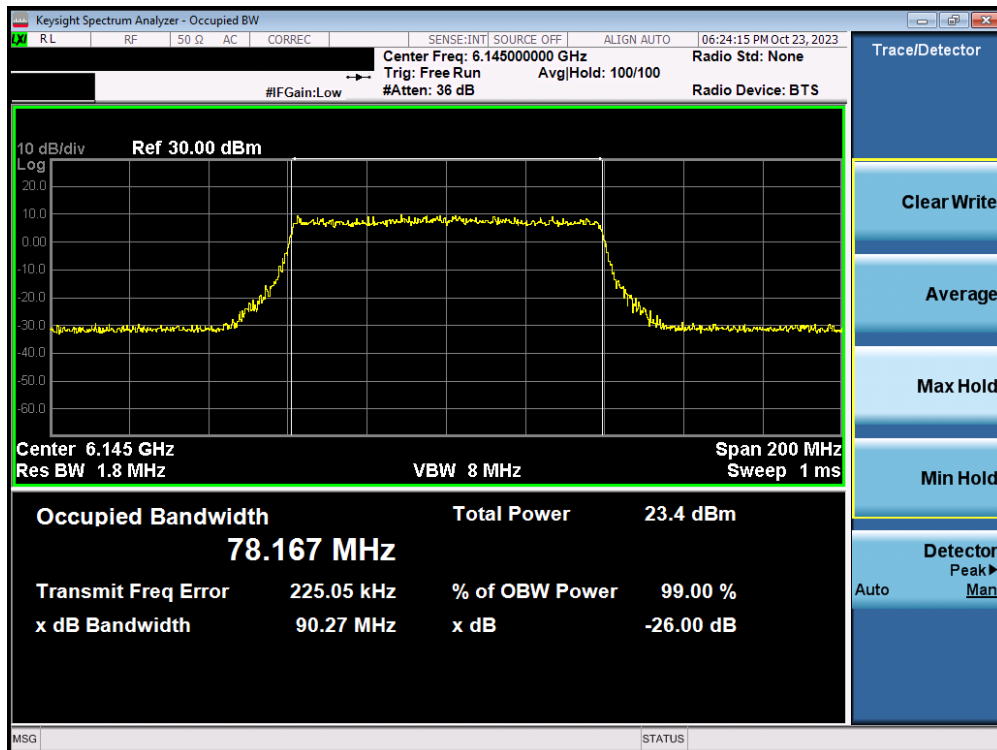


Plot 7-28. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 5) – Ch. 39)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 32 of 158



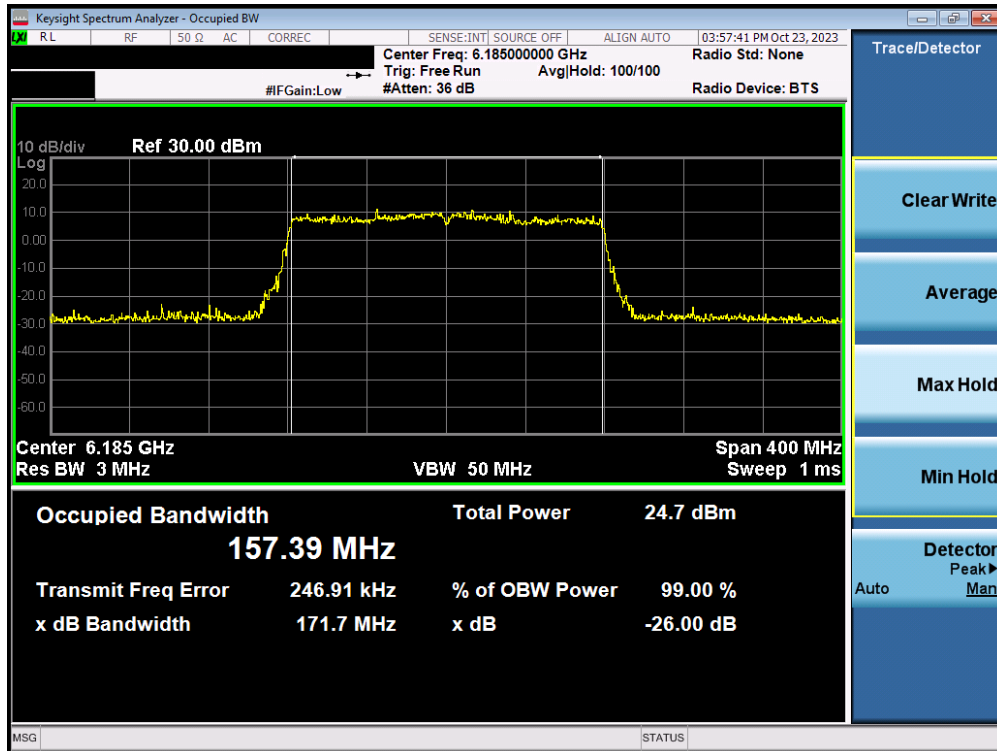


Plot 7-29. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (UNII Band 5) – Ch. 47)

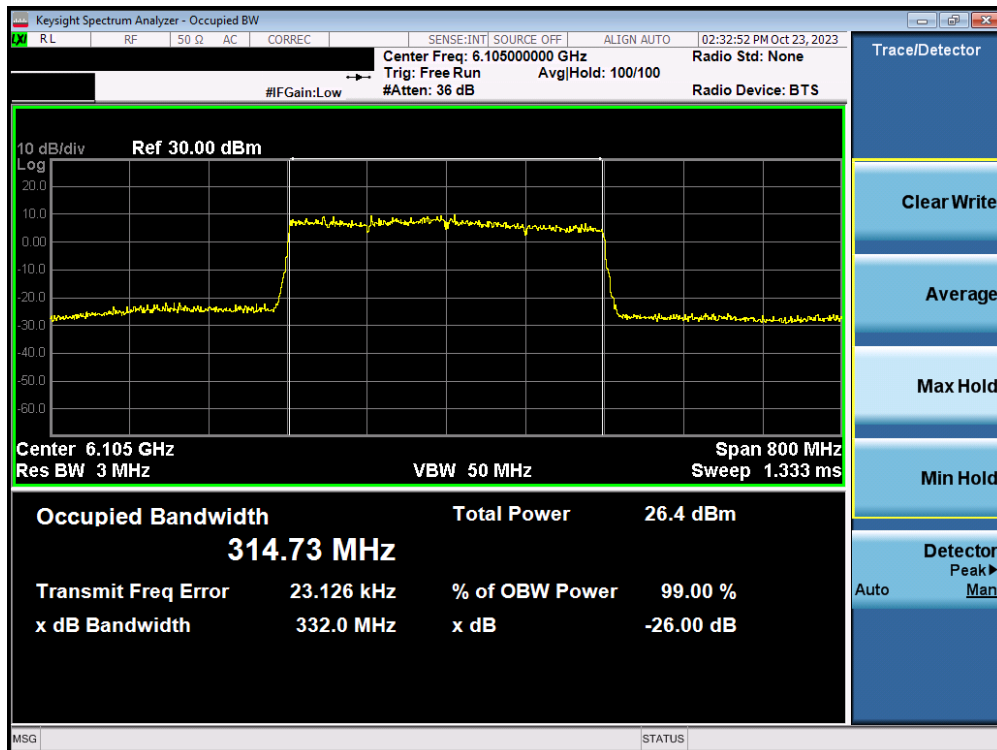


Plot 7-30. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (UNII Band 5) – Ch.31)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 33 of 158

### MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 6)

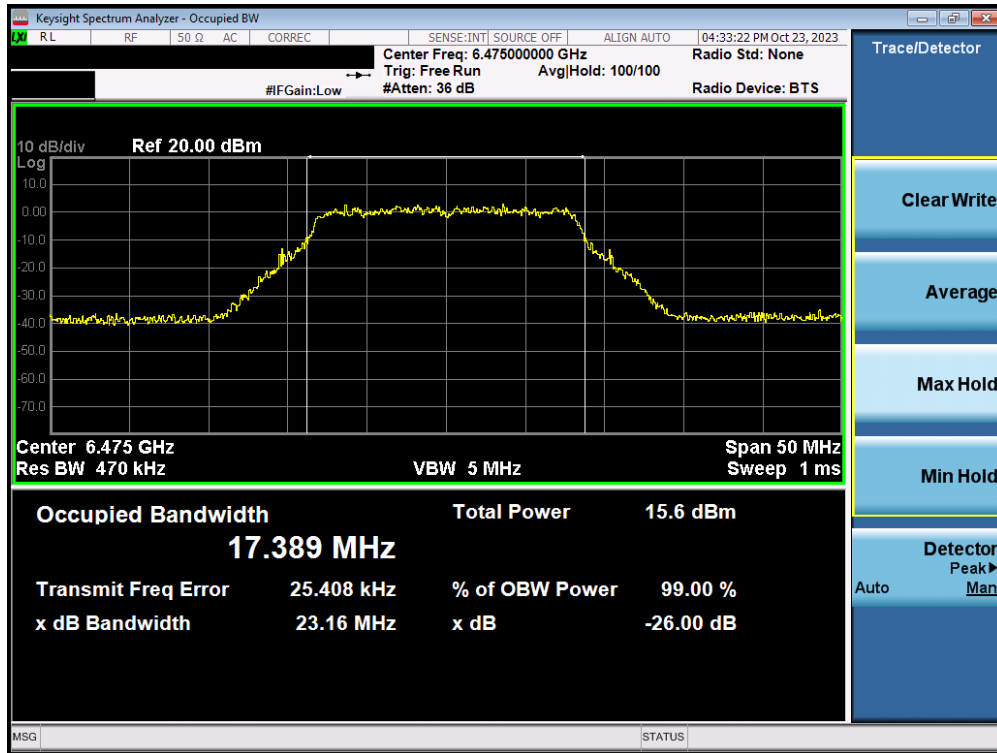


Plot 7-31. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 105)

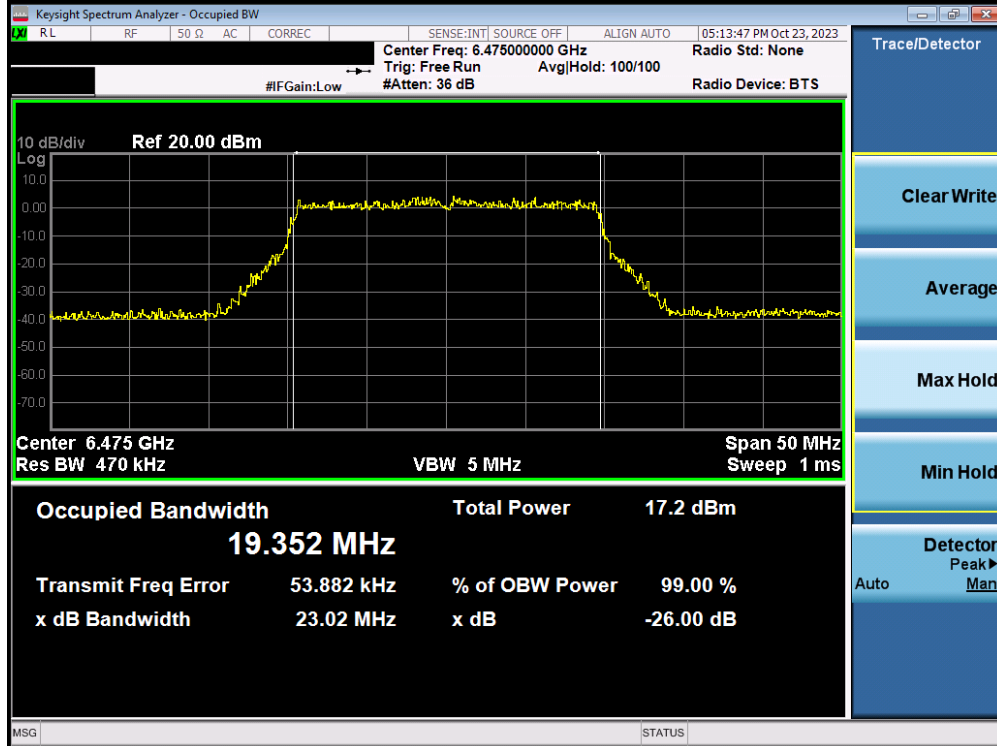


Plot 7-32. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 6) – Ch. 105)

FCC ID: A3LSMS928B		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 34 of 158	

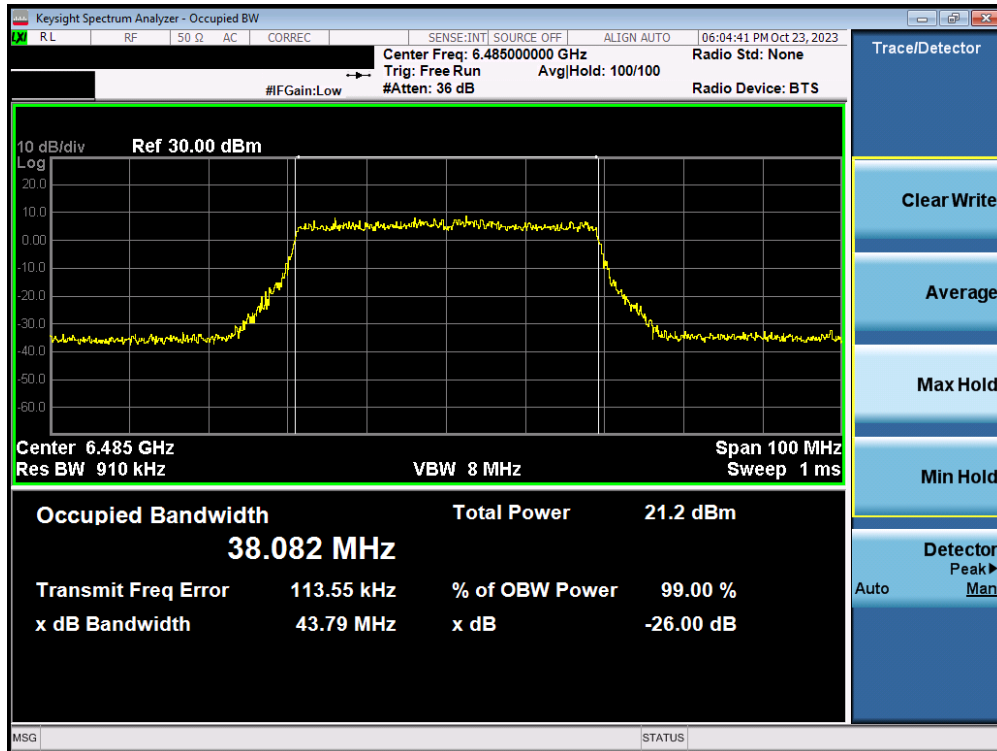


Plot 7-33. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 6) – Ch. 107)

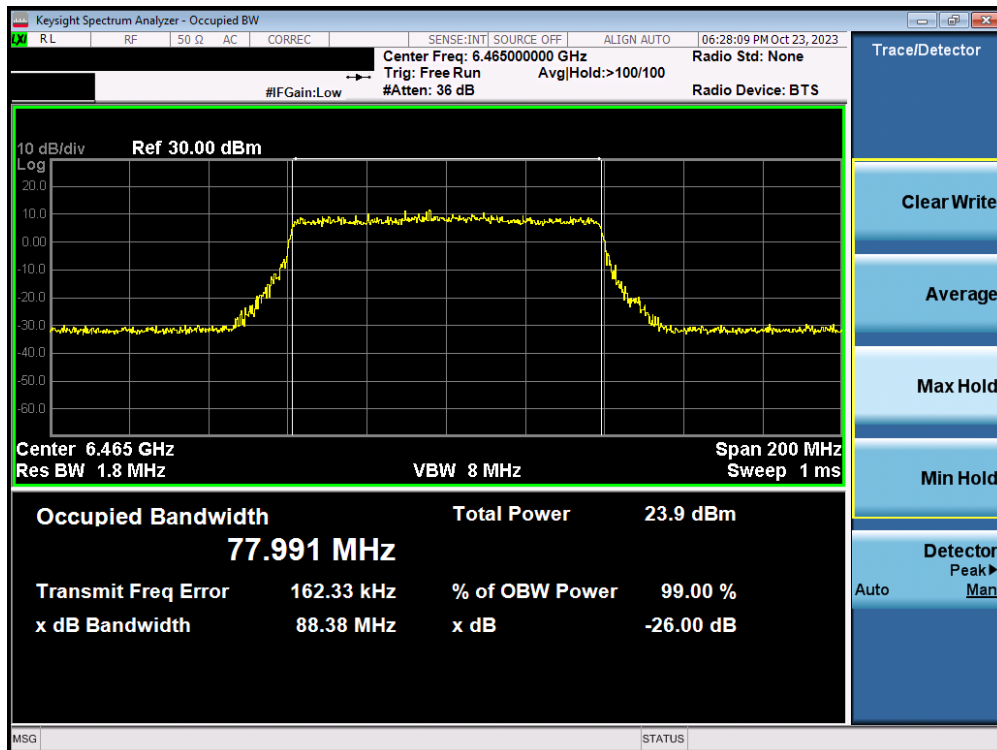


Plot 7-34. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 6) – Ch. 103)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 35 of 158

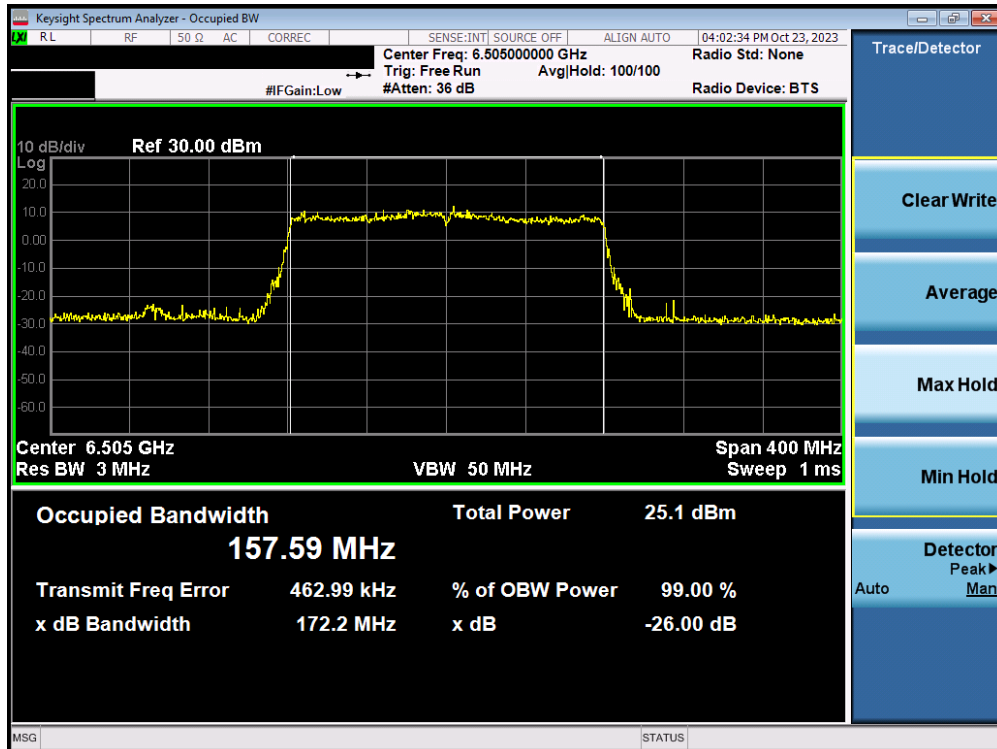


Plot 7-35. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (UNII Band 6) – Ch. 111)

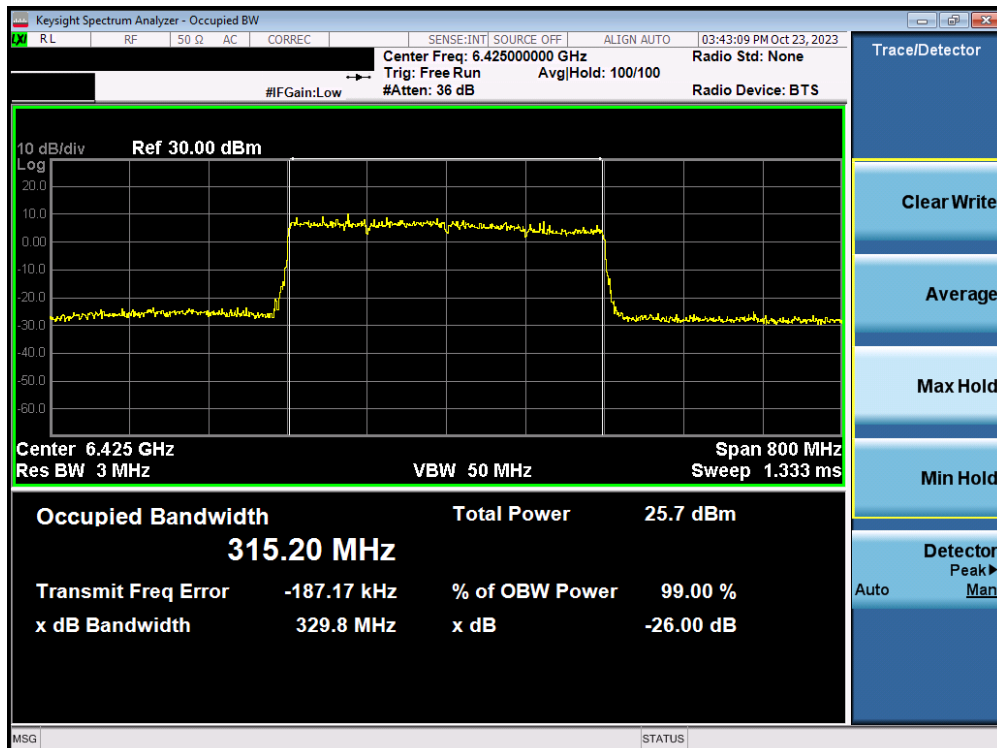


Plot 7-36. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11be (UNII Band 5/6/7) – Ch. 95)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 36 of 158

### MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 7)

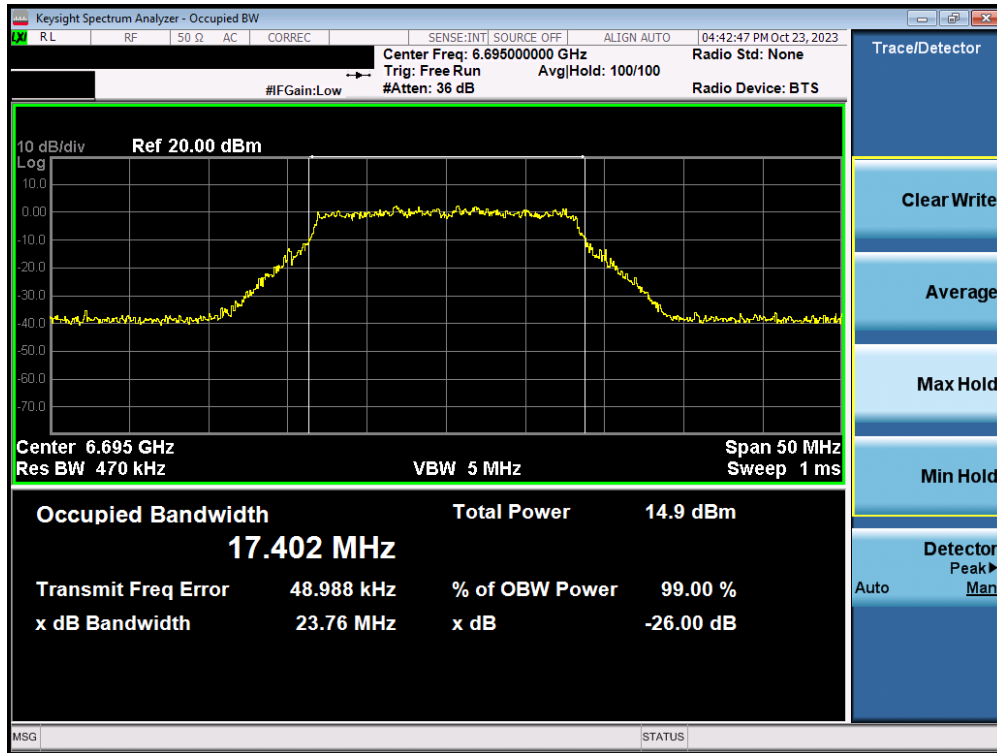


Plot 7-37. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 149)

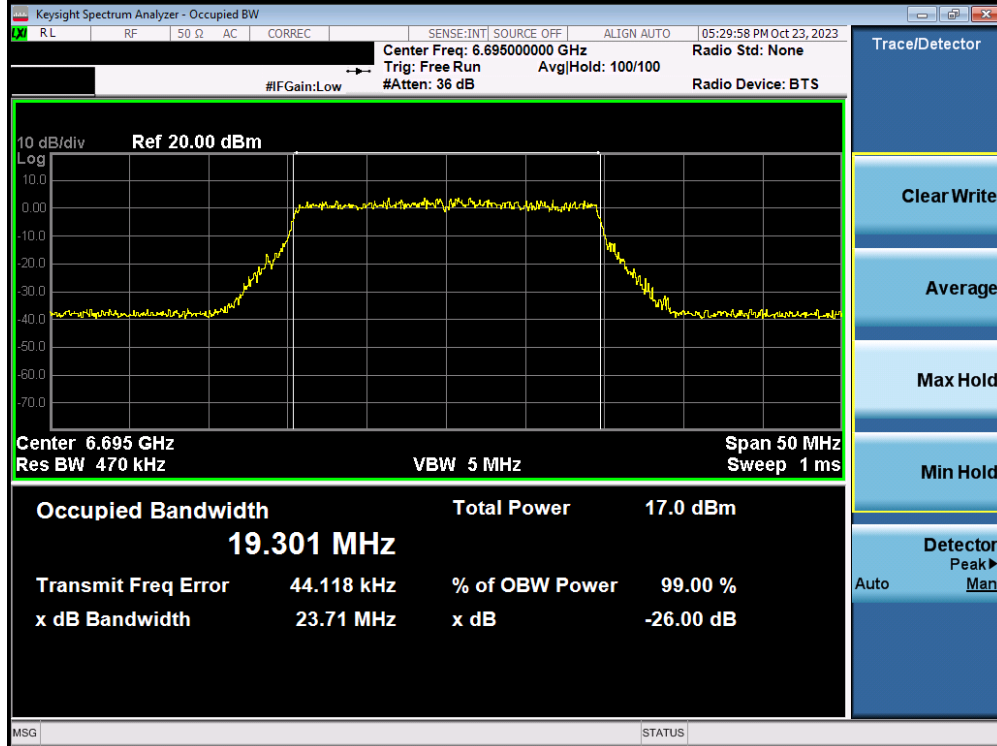


Plot 7-38. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 7) – Ch. 149)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 37 of 158

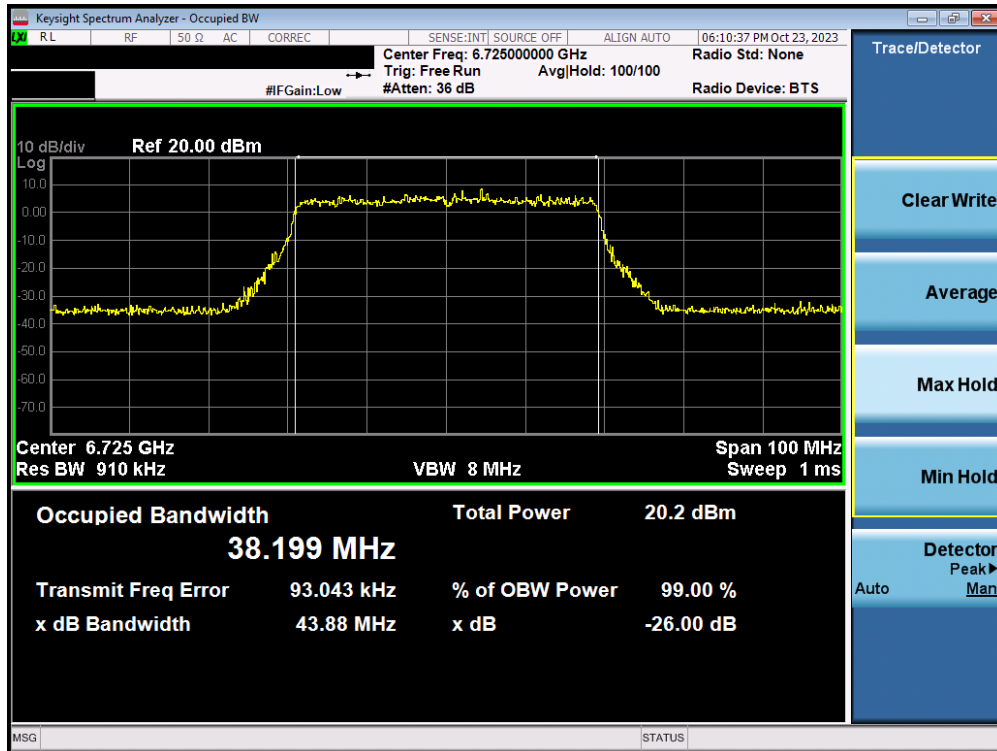


Plot 7-39. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 7) – Ch. 155)

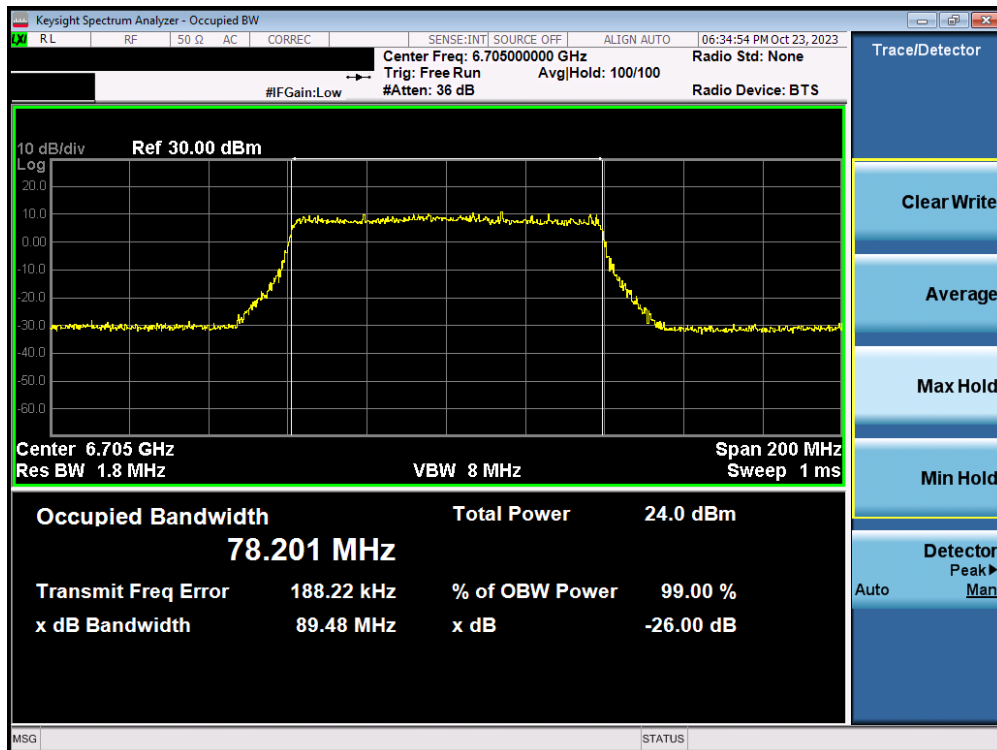


Plot 7-40. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 7) – Ch. 151)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 38 of 158

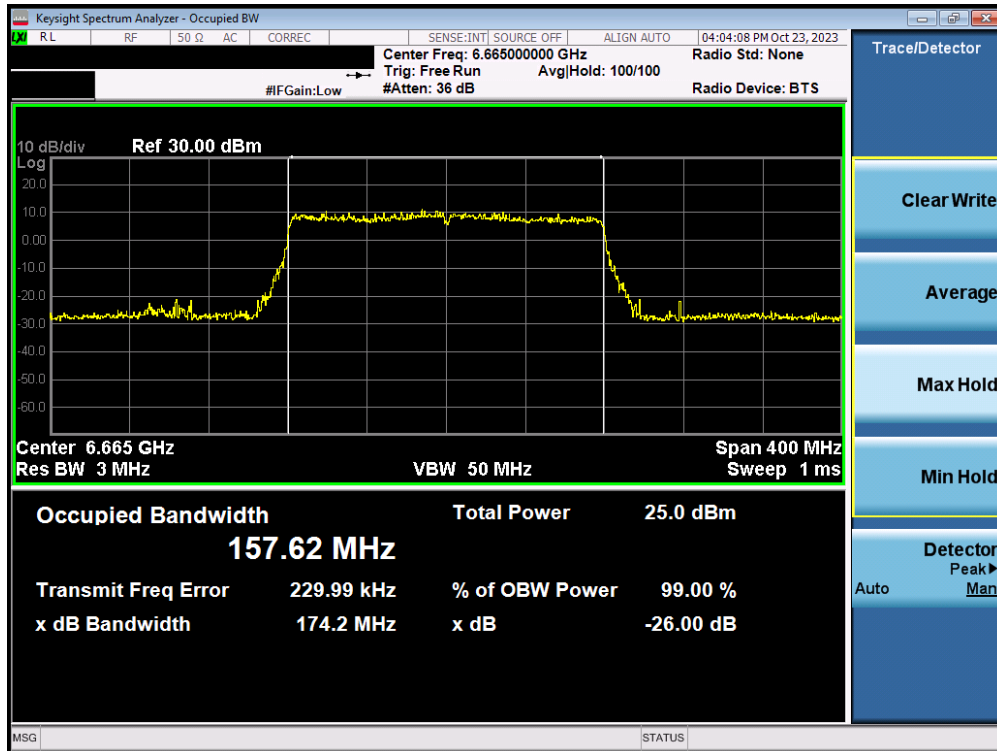

Plot 7-41. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (UNII Band 7) – Ch. 143)

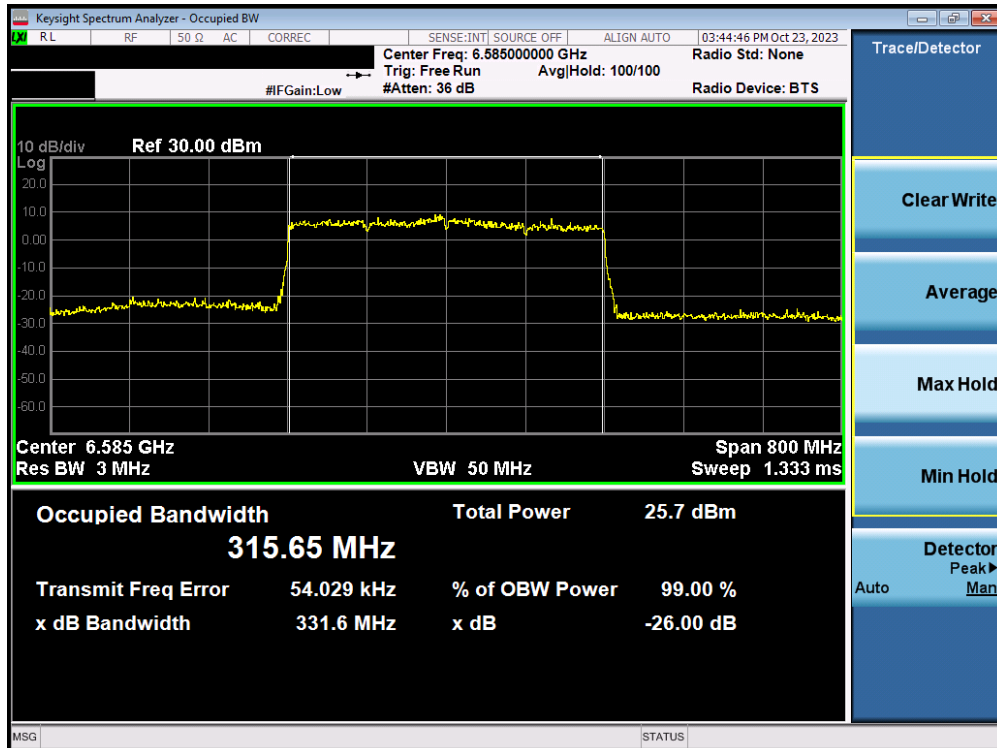


Plot 7-42. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11be (UNII Band 6/7) – Ch. 127)


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 39 of 158



### MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 8)

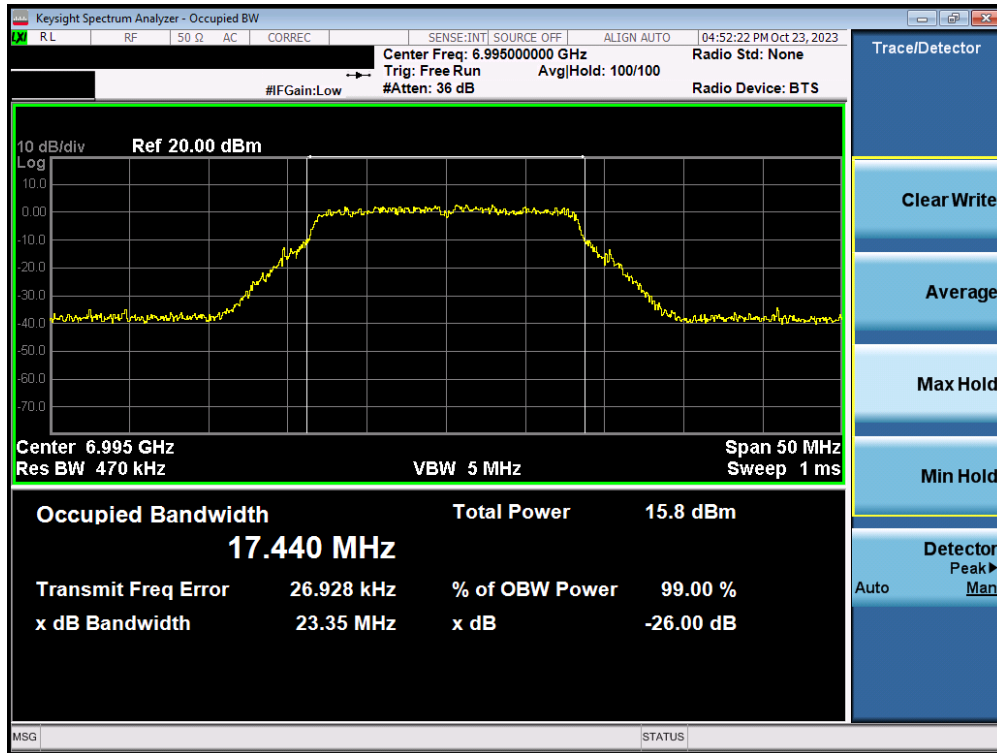


Plot 7-43. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 209)

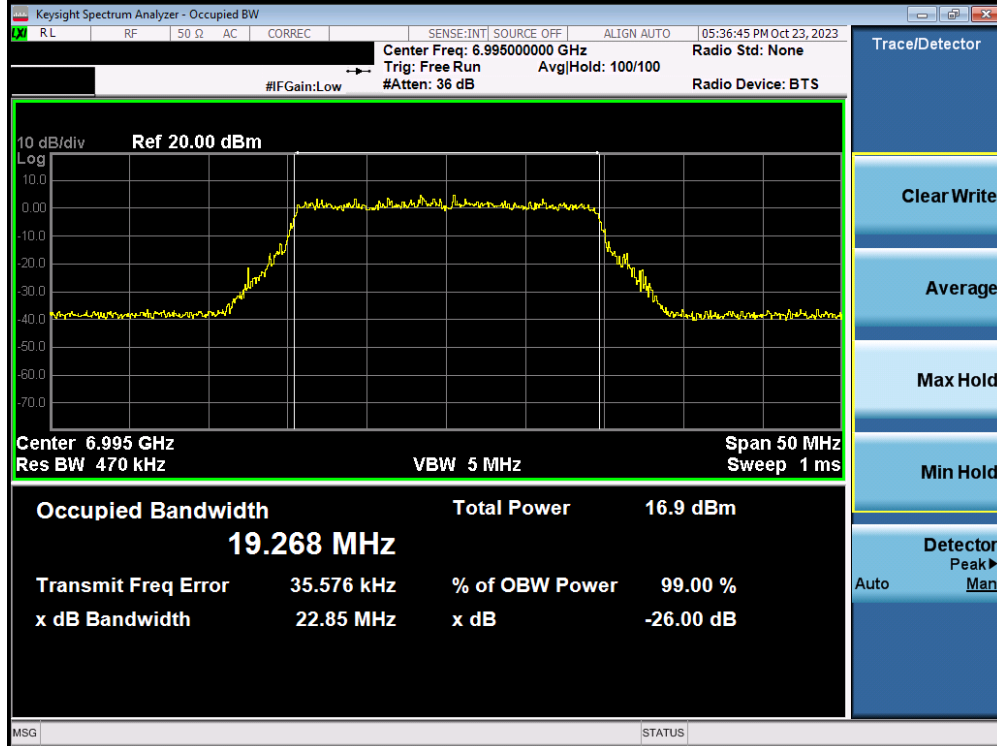


Plot 7-44. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 8) – Ch. 209)

FCC ID: A3LSMS928B		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 40 of 158	



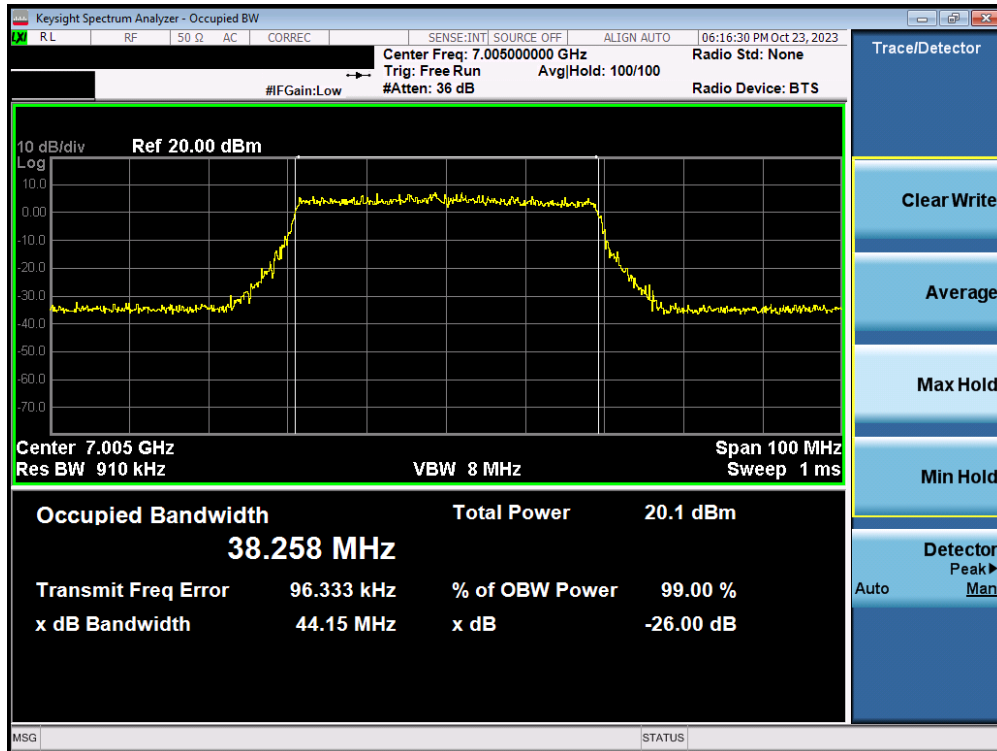


Plot 7-45. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 8) – Ch. 211)

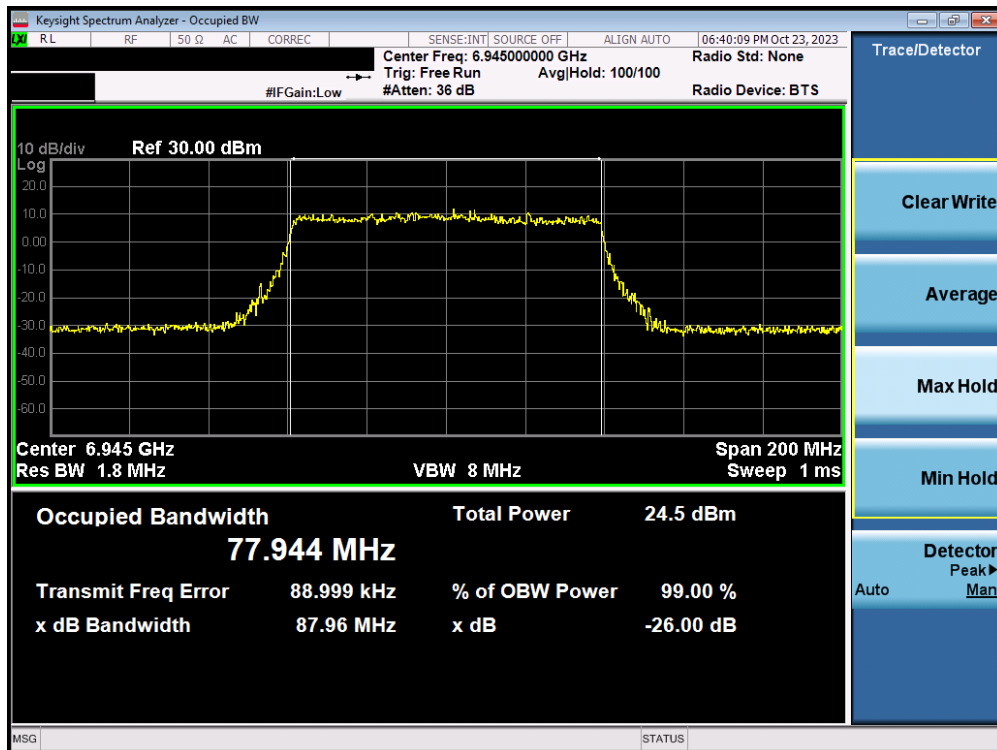


Plot 7-46. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 8) – Ch. 199)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 41 of 158

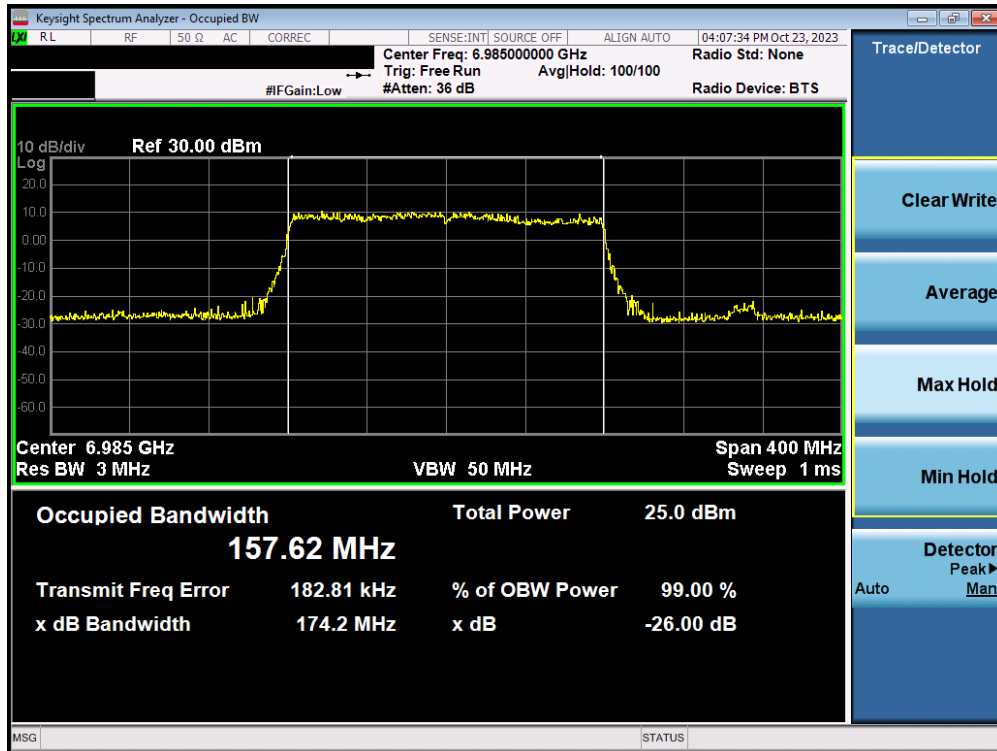

Plot 7-47. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (UNII Band 8) – Ch. 207)

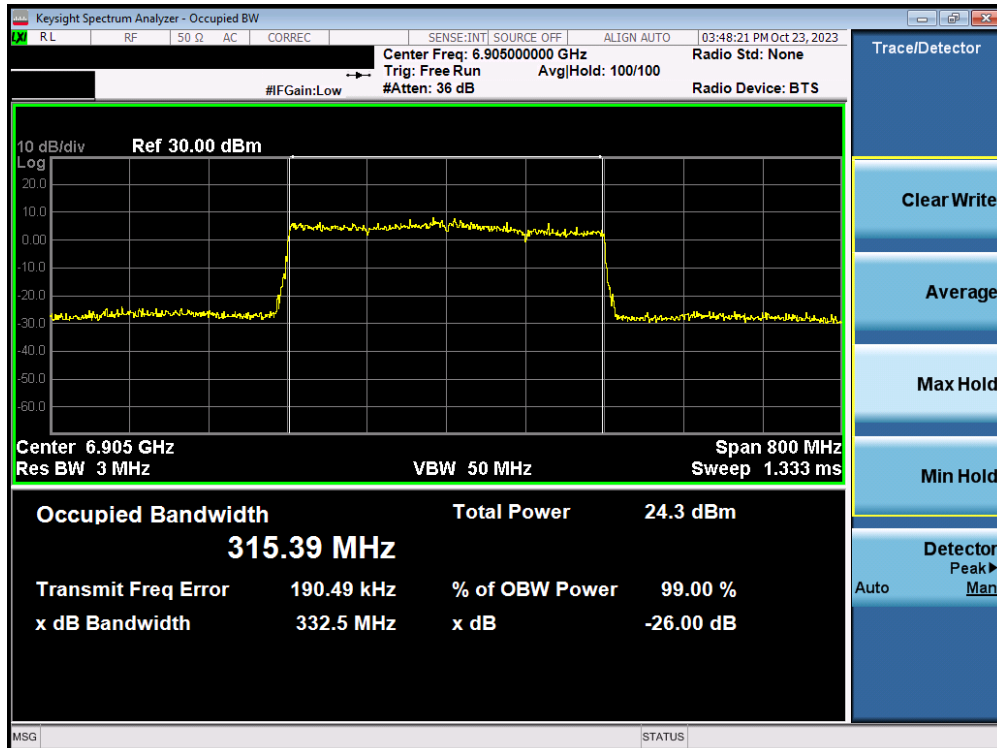

Plot 7-48. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11be (UNII Band 7/8) – Ch. 191)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 42 of 158

### 7.3 UNII Output Power Measurement

#### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

**For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm. For client devices operating under the control of a standard power access point, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.**

#### Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G  
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

#### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

None.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 43 of 158

## MIMO Maximum Conducted Output Power Measurements - LPI

6GHz WIFI (20MHz 802.11a MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	4.79	5.14	7.98	-1.25	6.73	24.00	-17.27
	6175	45	7.96	7.72	10.85	-1.25	9.60	24.00	-14.40
	6415	93	7.99	7.97	10.99	-1.25	9.74	24.00	-14.26
UNII-6	6435	97	7.97	7.98	10.99	-2.59	8.40	24.00	-15.60
	6475	105	7.93	7.88	10.92	-2.59	8.33	24.00	-15.67
	6515	113	7.99	7.81	10.91	-2.59	8.32	24.00	-15.68
UNII-7	6535	117	7.99	7.78	10.90	-2.59	8.31	24.00	-15.69
	6675	145	7.99	7.92	10.97	-2.59	8.38	24.00	-15.62
	6695	149	7.99	7.83	10.92	-2.59	8.33	24.00	-15.67
UNII-8	6875	185	7.99	7.45	10.74	-1.74	9.00	24.00	-15.00
	6895	189	7.88	6.96	10.45	-2.59	7.86	24.00	-16.14
	6995	209	7.36	7.62	10.50	-2.59	7.91	24.00	-16.09
	7115	233	7.99	7.93	10.97	-2.59	8.38	24.00	-15.62

6GHz WIFI (20MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	5.17	5.49	8.34	-1.25	7.09	24.00	-16.91
	6175	45	8.82	8.50	11.68	-1.25	10.43	24.00	-13.57
	6415	93	8.99	8.89	11.95	-1.25	10.70	24.00	-13.30
UNII-6	6435	97	8.76	8.70	11.74	-2.59	9.15	24.00	-14.85
	6475	105	8.75	8.62	11.70	-2.59	9.11	24.00	-14.89
	6515	113	8.76	8.56	11.67	-2.59	9.08	24.00	-14.92
UNII-7	6535	117	8.86	8.50	11.69	-2.59	9.10	24.00	-14.90
	6675	145	8.99	8.84	11.92	-2.59	9.33	24.00	-14.67
	6695	149	8.85	8.45	11.66	-2.59	9.07	24.00	-14.93
UNII-8	6875	185	8.99	8.22	11.63	-1.74	9.89	24.00	-14.11
	6895	189	8.77	7.92	11.38	-2.59	8.79	24.00	-15.21
	6995	209	8.54	8.99	11.78	-2.59	9.19	24.00	-14.81
	7115	233	8.99	8.81	11.91	-2.59	9.32	24.00	-14.68

6GHz WIFI (20MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	5.16	5.49	8.34	-1.25	7.09	24.00	-16.91
	6175	45	8.83	8.51	11.68	-1.25	10.43	24.00	-13.57
	6415	93	8.94	8.84	11.90	-1.25	10.65	24.00	-13.35
UNII-6	6435	97	8.77	8.67	11.73	-2.59	9.14	24.00	-14.86
	6475	105	8.76	8.60	11.69	-2.59	9.10	24.00	-14.90
	6515	113	8.78	8.59	11.70	-2.59	9.11	24.00	-14.89
UNII-7	6535	117	8.86	8.44	11.67	-2.59	9.08	24.00	-14.92
	6675	145	8.94	8.79	11.88	-2.59	9.29	24.00	-14.71
	6695	149	8.91	8.46	11.70	-2.59	9.11	24.00	-14.89
UNII-8	6875	185	8.99	8.30	11.67	-1.74	9.93	24.00	-14.07
	6895	189	8.86	7.85	11.39	-2.59	8.80	24.00	-15.20
	6995	209	8.52	8.99	11.77	-2.59	9.18	24.00	-14.82
	7115	233	8.98	8.85	11.93	-2.59	9.34	24.00	-14.66

Table 7-3. MIMO 20MHz BW (UNII) Maximum Conducted Output Powers

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 44 of 158

6GHz WIFI (40MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5965	3	10.69	11.16	13.94	-1.25	12.69	24.00	-11.31
	6165	43	11.47	11.07	14.28	-1.25	13.03	24.00	-10.97
	6285	67	11.39	11.49	14.45	-1.25	13.20	24.00	-10.80
	6405	91	11.33	11.02	14.18	-1.25	12.93	24.00	-11.07
UNII-6	6445	99	11.47	11.13	14.31	-2.59	11.72	24.00	-12.28
	6485	107	11.27	10.87	14.09	-2.59	11.50	24.00	-12.50
	6525	115	11.49	10.89	14.21	-2.14	12.07	24.00	-11.93
UNII-7	6565	123	11.19	10.53	13.88	-2.14	11.74	24.00	-12.26
	6685	147	11.22	10.74	13.99	-2.14	11.85	24.00	-12.15
	6725	155	10.99	10.41	13.72	-2.14	11.58	24.00	-12.42
	6845	179	11.33	11.23	14.29	-2.14	12.15	24.00	-11.85
UNII-8	6885	187	11.49	10.76	14.15	-1.74	12.41	24.00	-11.59
	7005	211	11.23	10.97	14.11	-1.74	12.37	24.00	-11.63
	7085	227	9.86	11.49	13.76	-1.74	12.02	24.00	-11.98

6GHz WIFI (40MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5965	3	10.33	10.98	13.68	-1.25	12.43	24.00	-11.57
	6165	43	11.18	10.86	14.03	-1.25	12.78	24.00	-11.22
	6285	67	11.06	11.39	14.24	-1.25	12.99	24.00	-11.01
	6405	91	11.30	11.28	14.30	-1.25	13.05	24.00	-10.95
UNII-6	6445	99	11.15	10.92	14.05	-2.59	11.46	24.00	-12.54
	6485	107	11.02	11.06	14.05	-2.59	11.46	24.00	-12.54
	6525	115	11.18	10.61	13.92	-2.14	11.78	24.00	-12.22
UNII-7	6565	123	10.96	10.28	13.64	-2.14	11.50	24.00	-12.50
	6685	147	11.49	11.23	14.37	-2.14	12.23	24.00	-11.77
	6725	155	11.29	10.83	14.08	-2.14	11.94	24.00	-12.06
	6845	179	10.95	11.12	14.05	-2.14	11.91	24.00	-12.09
UNII-8	6885	187	11.14	10.45	13.82	-1.74	12.08	24.00	-11.92
	7005	211	11.43	11.20	14.33	-1.74	12.59	24.00	-11.41
	7085	227	9.93	11.49	13.79	-1.74	12.05	24.00	-11.95

**Table 7-4. MIMO 40MHz BW (UNII) Maximum Conducted Output Powers**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 45 of 158

6GHz WIFI (80MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5985	7	14.31	14.66	17.50	-1.25	16.25	24.00	-7.75
	6145	39	14.70	14.25	17.49	-1.25	16.24	24.00	-7.76
	6305	71	14.26	14.68	17.49	-1.25	16.24	24.00	-7.76
	6385	87	14.89	14.65	17.78	-1.25	16.53	24.00	-7.47
UNII-6	6465	103	14.69	14.54	17.62	-2.59	15.03	24.00	-8.97
UNII-7	6545	119	14.97	14.65	17.82	-2.14	15.68	24.00	-8.32
	6705	151	14.99	14.65	17.83	-2.14	15.69	24.00	-8.31
	6785	167	14.87	14.22	17.57	-2.14	15.43	24.00	-8.57
	6865	183	14.86	14.36	17.63	-1.74	15.89	24.00	-8.11
UNII-8	6945	199	13.35	14.90	17.21	-1.74	15.47	24.00	-8.53
	7025	215	14.99	13.82	17.46	-1.74	15.72	24.00	-8.28

6GHz WIFI (80MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5985	7	14.34	14.66	17.51	-1.25	16.26	24.00	-7.74
	6145	39	14.75	14.24	17.51	-1.25	16.26	24.00	-7.74
	6305	71	14.26	14.68	17.48	-1.25	16.23	24.00	-7.77
	6385	87	14.83	14.72	17.78	-1.25	16.53	24.00	-7.47
UNII-6	6465	103	14.70	14.54	17.63	-2.59	15.04	24.00	-8.96
UNII-7	6545	119	14.98	14.66	17.83	-2.14	15.69	24.00	-8.31
	6705	151	14.96	14.69	17.83	-2.14	15.69	24.00	-8.31
	6785	167	14.86	14.23	17.57	-2.14	15.43	24.00	-8.57
	6865	183	14.87	14.40	17.65	-1.74	15.91	24.00	-8.09
UNII-8	6945	199	13.37	14.93	17.23	-1.74	15.49	24.00	-8.51
	7025	215	14.99	13.81	17.45	-1.74	15.71	24.00	-8.29

**Table 7-5. MIMO 80MHz BW (UNII) Maximum Conducted Output Powers**

6GHz WIFI (160MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	6025	15	15.97	15.13	18.58	-1.25	17.33	24.00	-6.67
	6185	47	15.49	15.20	18.36	-1.25	17.11	24.00	-6.89
	6345	79	15.33	15.41	18.38	-1.25	17.13	24.00	-6.87
UNII-6	6505	111	15.49	15.35	18.43	-2.14	16.29	24.00	-7.71
UNII-7	6665	143	15.46	14.99	18.24	-2.14	16.10	24.00	-7.90
	6825	175	15.50	15.25	18.39	-1.74	16.65	24.00	-7.35
UNII-8	6985	207	15.35	15.41	18.39	-1.74	16.65	24.00	-7.35

6GHz WIFI (160MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	6025	15	15.74	15.28	18.52	-1.25	17.27	24.00	-6.73
	6185	47	15.83	15.55	18.70	-1.25	17.45	24.00	-6.55
	6345	79	15.60	15.99	18.81	-1.25	17.56	24.00	-6.44
UNII-6	6505	111	15.99	15.85	18.93	-2.14	16.79	24.00	-7.21
UNII-7	6665	143	15.83	15.45	18.66	-2.14	16.52	24.00	-7.48
	6825	175	15.82	15.68	18.76	-1.74	17.02	24.00	-6.98
UNII-8	6985	207	15.51	15.98	18.76	-1.74	17.02	24.00	-6.98

**Table 7-6. MIMO 160MHz BW (UNII) Maximum Conducted Output Powers**

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 46 of 158

6GHz WIFI (320MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
I-5	6105	31	15.85	15.06	18.48	-1.25	17.23	24.00	-6.77
I-5	6265	63	15.35	15.63	18.51	-1.25	17.26	24.00	-6.74
I-6	6425	95	15.58	15.75	18.68	-2.59	16.09	24.00	-7.91
I-7	6585	127	15.99	15.52	18.77	-2.14	16.63	24.00	-7.37
I-7	6745	159	15.87	15.42	18.66	-2.14	16.52	24.00	-7.48
I-8	6905	191	15.72	14.22	18.04	-1.74	16.30	24.00	-7.70

**Table 7-7. MIMO 320MHz BW (UNII) Maximum Conducted Output Powers**

Bandwidth	Band	Freq [MHz]	Channel	Puncture Size	Average Conducted Power (dBm)						Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					Puncture Case									
					90_Low			91_Mid1						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
80MHz BW	5	6145	39	20MHz	14.67	14.15	17.43	14.53	14.03	17.30	-1.25	16.2	24.0	-7.82
	6	6465	103	20MHz	14.99	14.97	17.99	14.95	14.89	17.93	-2.59	15.4	24.0	-8.60
	7	6705	151	20MHz	14.97	14.44	17.72	14.87	14.37	17.64	-2.14	15.6	24.0	-8.42
	8	6945	199	20MHz	13.30	14.61	17.01	13.69	14.99	17.40	-1.74	15.7	24.0	-8.34
160MHz BW	5	6185	47	40MHz	15.68	15.61	18.66	15.78	15.57	18.69	-1.25	17.4	24.0	-6.56
	6	6505	111	40MHz	15.90	15.73	18.82	15.95	15.93	18.95	-2.59	16.4	24.0	-7.64
	7	6665	143	40MHz	15.66	15.42	18.55	15.77	15.52	18.65	-2.14	16.5	24.0	-7.49
	8	6985	207	40MHz	15.25	15.86	18.58	15.49	15.99	18.76	-1.74	17.0	24.0	-6.98
160MHz BW	5	6185	47	20MHz	15.65	15.51	18.59	15.97	15.74	18.86	-1.25	17.6	24.0	-6.38
	6	6505	111	20MHz	15.81	15.74	18.78	15.66	15.57	18.63	-2.59	16.2	24.0	-7.80
	7	6665	143	20MHz	15.61	15.19	18.41	15.99	15.38	18.71	-2.14	16.6	24.0	-7.43
	8	6985	207	20MHz	15.21	15.75	18.50	15.59	15.52	18.57	-1.74	16.8	24.0	-7.18
320MHz BW	5	6105	31	120MHz	15.99	15.16	18.61	15.98	15.16	18.60	-1.25	17.4	24.0	-6.64
	6	6425	95	120MHz	15.65	15.95	18.81	15.59	15.87	18.74	-2.59	16.2	24.0	-7.78
	7	6585	127	120MHz	15.66	14.94	18.33	15.99	15.56	18.79	-2.14	16.7	24.0	-7.35
	8	6905	191	120MHz	15.84	14.23	18.12	15.66	14.19	18.00	-1.74	16.4	24.0	-7.62
320MHz BW	5	6105	31	80MHz	15.99	15.32	18.68	15.71	14.87	18.32	-1.25	17.4	24.0	-6.57
	6	6425	95	80MHz	15.71	15.81	18.77	15.76	15.99	18.89	-2.59	16.3	24.0	-7.70
	7	6585	127	80MHz	15.65	15.17	18.43	15.87	15.26	18.59	-2.14	16.4	24.0	-7.55
	8	6905	191	80MHz	15.66	14.09	17.96	15.99	14.30	18.24	-1.74	16.5	24.0	-7.51
320MHz BW	5	6105	31	40MHz	15.58	14.75	18.20	15.71	14.84	18.31	-1.25	17.1	24.0	-6.94
	6	6425	95	40MHz	15.69	15.88	18.79	15.68	15.83	18.76	-2.59	16.2	24.0	-7.80
	7	6585	127	40MHz	15.72	15.17	18.46	15.81	15.29	18.57	-2.14	16.4	24.0	-7.57
	8	6905	191	40MHz	15.86	14.15	18.10	15.75	13.98	17.97	-1.74	16.4	24.0	-7.65

**Table 7-8. MIMO Puncture Cases for IEEE 802.11be (UNII) Maximum Conducted Output Power**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 47 of 158



## MIMO Maximum Conducted Output Power Measurements – SP

6GHz WIFI (20MHz 802.11a MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	4.79	5.14	7.98	-1.25	6.73	30.00	-23.27
	6175	45	14.95	14.48	17.73	-1.25	16.48	30.00	-13.52
	6415	93	14.69	14.66	17.68	-1.25	16.43	30.00	-13.57
UNII-7	6535	117	14.62	14.08	17.37	-2.59	14.78	30.00	-15.22
	6675	145	14.66	14.39	17.54	-2.59	14.95	30.00	-15.05
	6695	149	14.93	14.54	17.75	-2.59	15.16	30.00	-14.84

6GHz WIFI (20MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	5.17	5.49	8.34	-1.25	7.09	30.00	-22.91
	6175	45	15.83	15.39	18.63	-1.25	17.38	30.00	-12.62
	6415	93	15.94	15.92	18.94	-1.25	17.69	30.00	-12.31
UNII-7	6535	117	15.99	15.42	18.72	-2.59	16.13	30.00	-13.87
	6675	145	15.99	15.78	18.89	-2.59	16.30	30.00	-13.70
	6695	149	15.81	15.56	18.70	-2.59	16.11	30.00	-13.89

6GHz WIFI (20MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	5.16	5.49	8.34	-1.25	7.09	30.00	-22.91
	6175	45	15.81	15.39	18.62	-1.25	17.37	30.00	-12.63
	6415	93	15.92	15.98	18.96	-1.25	17.71	30.00	-12.29
UNII-7	6535	117	15.98	15.41	18.71	-2.59	16.12	30.00	-13.88
	6675	145	15.99	15.76	18.89	-2.59	16.30	30.00	-13.70
	6695	149	15.72	15.55	18.64	-2.59	16.05	30.00	-13.95

**Table 7-9. MIMO 20MHz BW (UNII) Maximum Conducted Output Powers**

6GHz WIFI (40MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5965	3	15.64	15.99	18.83	-1.25	17.58	30.00	-12.42
	6165	43	15.98	15.45	18.73	-1.25	17.48	30.00	-12.52
	6285	67	15.70	15.95	18.84	-1.25	17.59	30.00	-12.41
	6405	91	15.73	15.67	18.71	-1.25	17.46	30.00	-12.54
UNII-7	6565	123	15.92	15.12	18.55	-2.14	16.41	30.00	-13.59
	6685	147	15.99	15.66	18.84	-2.14	16.70	30.00	-13.30
	6725	155	15.78	15.67	18.74	-2.14	16.60	30.00	-13.40
	6845	179	15.81	15.50	18.67	-2.14	16.53	30.00	-13.47

6GHz WIFI (40MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5965	3	15.31	15.85	18.60	-1.25	17.35	30.00	-12.65
	6165	43	15.73	15.30	18.53	-1.25	17.28	30.00	-12.72
	6285	67	15.44	15.76	18.61	-1.25	17.36	30.00	-12.64
	6405	91	15.83	15.88	18.87	-1.25	17.62	30.00	-12.38
UNII-7	6565	123	15.62	15.10	18.38	-2.14	16.24	30.00	-13.76
	6685	147	15.68	15.32	18.52	-2.14	16.38	30.00	-13.62
	6725	155	15.95	15.75	18.86	-2.14	16.72	30.00	-13.28
	6845	179	15.91	15.80	18.86	-2.14	16.72	30.00	-13.28

**Table 7-10. MIMO 40MHz BW (UNII) Maximum Conducted Output Powers**

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 48 of 158





6GHz WIFI (80MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5985	7	15.77	15.68	18.74	-1.25	17.49	30.00	-12.51
	6145	39	15.78	15.13	18.48	-1.25	17.23	30.00	-12.77
	6305	71	15.79	15.70	18.76	-1.25	17.51	30.00	-12.49
	6385	87	15.74	15.39	18.58	-1.25	17.33	30.00	-12.67
UNII-7	6705	151	15.90	15.25	18.60	-2.14	16.46	30.00	-13.54
	6785	167	15.91	15.11	18.54	-2.14	16.40	30.00	-13.60

6GHz WIFI (80MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5985	7	15.80	15.67	18.75	-1.25	17.50	30.00	-12.50
	6145	39	15.74	15.12	18.45	-1.25	17.20	30.00	-12.80
	6305	71	15.81	15.69	18.76	-1.25	17.51	30.00	-12.49
	6385	87	15.76	15.34	18.57	-1.25	17.32	30.00	-12.68
UNII-7	6705	151	15.88	15.31	18.61	-2.14	16.47	30.00	-13.53
	6785	167	15.88	15.15	18.54	-2.14	16.40	30.00	-13.60

**Table 7-11. MIMO 80MHz BW (UNII) Maximum Conducted Output Powers**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 49 of 158



**Sample MIMO Calculation:**

At 5935MHz in 802.11a (20MHz BW) mode, the average conducted output power was measured to be 4.79 dBm for Antenna-1 and 5.14 dBm for Antenna-2.

$$\text{Antenna 1 + Antenna 2 = MIMO}$$

$$(4.79 \text{ dBm} + 5.14 \text{ dBm}) = (3.01 \text{ mW} + 3.27 \text{ mW}) = 6.28 \text{ mW} = 7.98 \text{ dBm}$$

**Sample Directional Gain Calculation:**

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

**Sample e.i.r.p. Calculation:**

At 5935MHz in 802.11a (20MHz BW) mode, the average MIMO conducted power was calculated to be 7.98 dBm with directional gain of -1.25 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$7.98 \text{ dBm} + (-1.25) \text{ dBi} = 6.73 \text{ dBm}$$

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 50 of 158

## 7.4 Maximum Power Spectral Density

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density for 802.11a/ax.

***In the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed  $-1$  dBm e.i.r.p. in any 1-megahertz band. For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm/MHz e.i.r.p.***

### Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation.
2. Span was set to encompass the entire emission bandwidth of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times$  (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes.
9. Trace was averaged over 100 sweeps.
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 51 of 158

## MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5935	2	a	-3.23	-3.19	-5.08	-3.51	-0.19	-1.25	-1.44	-1	-0.44
	6175	45	a	-2.78	-2.83	-5.69	-4.03	0.20	-1.81	-1.61	-1	-0.61
	6415	93	a	-1.90	-2.59	-6.31	-4.88	0.78	-2.56	-1.77	-1	-0.77
	5935	2	ax (20MHz)	-3.03	-2.78	-5.08	-3.51	0.11	-1.25	-1.14	-1	-0.14
	6175	45	ax (20MHz)	-2.43	-2.85	-5.69	-4.03	0.37	-1.81	-1.44	-1	-0.44
	6415	93	ax (20MHz)	-1.61	-2.35	-6.31	-4.88	1.05	-2.56	-1.51	-1	-0.51
	5695	3	ax (40MHz)	-3.94	-3.43	-3.66	-3.62	-0.67	-0.63	-1.30	-1	-0.30
	6165	43	ax (40MHz)	-2.55	-2.78	-5.69	-4.03	0.34	-1.81	-1.47	-1	-0.47
	6405	91	ax (40MHz)	-2.18	-2.20	-6.31	-4.88	0.82	-2.56	-1.74	-1	-0.74
	5985	7	ax (80MHz)	-2.98	-2.18	-6.16	-3.51	0.45	-1.72	-1.28	-1	-0.28
	6145	39	ax (80MHz)	-2.01	-2.59	-5.69	-4.03	0.72	-1.81	-1.09	-1	-0.09
	6385	87	ax (80MHz)	-2.08	-1.82	-6.31	-4.88	1.06	-2.56	-1.49	-1	-0.49
	6025	15	ax (160MHz)	-3.64	-3.99	-6.16	-3.51	-0.80	-1.72	-2.53	-1	-1.53
	6185	47	ax (160MHz)	-3.85	-3.77	-6.15	-4.69	-0.80	-2.38	-3.18	-1	-2.18
	6345	79	ax (160MHz)	-4.09	-3.28	-5.93	-4.21	-0.65	-2.02	-2.67	-1	-1.67
6105	31	be (320MHz)	-6.08	-6.46	-5.69	-4.03	-3.26	-1.81	-5.07	-1	-4.07	
6265	63	be (320MHz)	-7.27	-6.22	-6.15	-4.69	-3.70	-2.38	-6.08	-1	-5.08	
Band 6	6345	97	a	-2.10	-2.95	-5.93	-4.21	0.51	-2.02	-1.51	-1	-0.51
	6475	105	a	-2.17	-2.33	-6.31	-4.88	0.76	-2.56	-1.79	-1	-0.79
	6515	113	a	-1.70	-1.96	-6.53	-4.94	1.18	-2.69	-1.51	-1	-0.51
	6345	97	ax (20MHz)	-1.78	-2.45	-5.93	-4.21	0.91	-2.02	-1.10	-1	-0.10
	6475	105	ax (20MHz)	-1.87	-1.83	-6.31	-4.88	1.16	-2.56	-1.39	-1	-0.39
	6515	113	ax (20MHz)	-1.49	-2.04	-6.53	-4.94	1.25	-2.69	-1.44	-1	-0.44
	6445	99	ax (40MHz)	-1.37	-1.93	-6.31	-4.88	1.37	-2.56	-1.19	-1	-0.19
	6485	107	ax (40MHz)	-1.75	-1.06	-6.53	-4.94	1.61	-2.69	-1.07	-1	-0.07
	6525	115	ax (40MHz)	-1.51	-1.80	-6.53	-4.94	1.36	-2.69	-1.33	-1	-0.33
	6465	103	ax (80MHz)	-1.89	-1.87	-6.31	-4.88	1.14	-2.56	-1.42	-1	-0.42
	6505	111	ax (160MHz)	-3.87	-3.28	-6.53	-4.94	-0.55	-2.69	-3.24	-1	-2.24
	6425	95	be (320MHz)	-6.21	-6.64	-6.31	-4.88	-3.41	-2.56	-5.96	-1	-4.96
Band 7	6535	117	a	-2.03	-2.52	-6.53	-4.94	0.74	-2.69	-1.95	-1	-0.95
	6695	149	a	-2.06	-2.95	-6.90	-3.96	0.53	-2.30	-1.77	-1	-0.77
	6875	185	a	-2.06	-2.40	-7.12	-4.40	0.79	-2.64	-1.86	-1	-0.86
	6535	117	ax (20MHz)	-1.61	-2.58	-6.53	-4.94	0.94	-2.69	-1.75	-1	-0.75
	6695	149	ax (20MHz)	-1.19	-2.53	-6.90	-3.96	1.20	-2.30	-1.09	-1	-0.09
	6875	185	ax (20MHz)	-1.75	-2.59	-7.12	-4.40	0.86	-2.64	-1.78	-1	-0.78
	6565	123	ax (40MHz)	-1.82	-2.24	-6.53	-4.94	0.99	-2.69	-1.70	-1	-0.70
	6725	155	ax (40MHz)	-1.74	-2.37	-6.90	-3.96	0.97	-2.30	-1.33	-1	-0.33
	6885	179	ax (40MHz)	-2.23	-2.24	-6.72	-3.50	0.78	-1.95	-1.17	-1	-0.17
	6545	119	ax (80MHz)	-1.62	-1.92	-6.53	-4.94	1.25	-2.69	-1.44	-1	-0.44
	6705	151	ax (80MHz)	-1.48	-2.17	-6.90	-3.96	1.20	-2.30	-1.09	-1	-0.09
	6865	183	ax (80MHz)	-1.58	-1.89	-7.12	-4.40	1.28	-2.64	-1.36	-1	-0.36
	6665	143	ax (160MHz)	-3.37	-4.06	-7.03	-5.35	-0.69	-3.14	-3.83	-1	-2.83
	6825	175	ax (160MHz)	-3.73	-3.41	-7.12	-4.40	-0.56	-2.64	-3.20	-1	-2.20
	Band 6/7	6665	127	be (320MHz)	-5.59	-6.01	-7.03	-5.35	-2.79	-3.14	-5.92	-1
Band 7/8	6825	159	be (320MHz)	-5.47	-5.95	-7.12	-4.40	-2.69	-2.64	-5.33	-1	-4.33
Band 8	6895	189	a	-2.02	-2.70	-6.72	-3.50	0.66	-1.95	-1.29	-1	-0.29
	6995	209	a	-2.35	-1.99	-8.11	-3.15	0.84	-2.27	-1.43	-1	-0.43
	7115	233	a	-1.32	-1.36	-9.13	-4.16	1.67	-3.28	-1.61	-1	-0.61
	6895	189	ax (20MHz)	-2.00	-2.79	-6.72	-3.50	0.63	-1.95	-1.32	-1	-0.32
	6995	209	ax (20MHz)	-2.12	-2.10	-8.11	-3.15	0.90	-2.27	-1.37	-1	-0.37
	7115	233	ax (20MHz)	-1.29	-1.09	-9.13	-4.16	1.82	-3.28	-1.46	-1	-0.46
	6925	187	ax (40MHz)	-2.04	-2.84	-6.72	-3.50	0.59	-1.95	-1.36	-1	-0.36
	7005	211	ax (40MHz)	-2.16	-2.46	-8.11	-3.15	0.70	-2.27	-1.57	-1	-0.57
	7085	227	ax (40MHz)	-2.17	-0.69	-9.13	-4.16	1.64	-3.28	-1.64	-1	-0.64
	6945	199	ax (80MHz)	-3.14	-1.42	-6.72	-3.50	0.82	-1.95	-1.13	-1	-0.13
	7025	215	ax (80MHz)	-1.92	-2.77	-8.11	-3.15	0.69	-2.27	-1.58	-1	-0.58
	6985	207	ax (160MHz)	-3.93	-3.86	-8.11	-3.15	-0.88	-2.27	-3.15	-1	-2.15
Band 7/8	6905	191	be (320MHz)	-5.96	-7.44	-6.72	-3.50	-3.62	-1.95	-5.57	-1	-4.57

Table 7-12. MIMO e.i.r.p. Conducted Power Spectral Density Measurements – LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 52 of 158

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5935	2	a	3.49	4.01	-5.08	-3.51	6.77	-1.25	5.52	17	-11.48
	6175	45	a	4.28	4.09	-5.69	-4.03	7.19	-1.81	5.38	17	-11.62
	6415	93	a	4.21	3.71	-6.31	-4.88	6.98	-2.56	4.42	17	-12.58
	5935	2	ax (20MHz)	3.91	4.31	-5.08	-3.51	7.12	-1.25	5.87	17	-11.13
	6175	45	ax (20MHz)	4.63	4.33	-5.69	-4.03	7.49	-1.81	5.68	17	-11.32
	6415	93	ax (20MHz)	4.79	4.56	-6.31	-4.88	7.69	-2.56	5.13	17	-11.87
	5695	3	ax (40MHz)	1.26	1.49	-3.66	-3.62	4.39	-0.63	3.76	17	-13.24
	6165	43	ax (40MHz)	1.45	1.22	-5.69	-4.03	4.34	-1.81	2.53	17	-14.47
	6405	91	ax (40MHz)	1.84	1.81	-6.31	-4.88	4.84	-2.56	2.28	17	-14.72
	5985	7	ax (80MHz)	-2.98	-2.18	-6.16	-3.51	0.45	-1.72	-1.28	17	-18.28
	6145	39	ax (80MHz)	-2.01	-2.59	-5.69	-4.03	0.72	-1.81	-1.09	17	-18.09
	6385	87	ax (80MHz)	-2.08	-1.82	-6.31	-4.88	1.06	-2.56	-1.49	17	-18.49
	6025	15	ax (160MHz)	-3.64	-3.99	-6.16	-3.51	-0.80	-1.72	-2.53	17	-19.53
	6185	47	ax (160MHz)	-3.85	-3.77	-6.15	-4.69	-0.80	-2.38	-3.18	17	-20.18
	6345	79	ax (160MHz)	-4.09	-3.28	-5.93	-4.21	-0.65	-2.02	-2.67	17	-19.67
	6105	31	be (320MHz)	-6.08	-6.46	-5.69	-4.03	-3.26	-1.81	-5.07	17	-22.07
	6265	63	be (320MHz)	-7.27	-6.22	-6.15	-4.69	-3.70	-2.38	-6.08	17	-23.08
	Band 7	6535	117	a	3.72	2.79	-6.53	-4.94	6.29	-2.69	3.60	17
6695		149	a	4.54	3.52	-6.90	-3.96	7.07	-2.30	4.77	17	-12.23
6875		185	a	4.88	3.77	-7.12	-4.40	7.37	-2.64	4.73	17	-12.27
6535		117	ax (20MHz)	4.45	3.59	-6.53	-4.94	7.05	-2.69	4.36	17	-12.64
6695		149	ax (20MHz)	5.02	4.31	-6.90	-3.96	7.69	-2.30	5.39	17	-11.61
6875		185	ax (20MHz)	4.67	3.78	-7.12	-4.40	7.26	-2.64	4.61	17	-12.39
6565		123	ax (40MHz)	1.17	0.71	-6.53	-4.94	3.95	-2.69	1.27	17	-15.73
6725		155	ax (40MHz)	2.17	1.61	-6.90	-3.96	4.91	-2.30	2.61	17	-14.39
6885		179	ax (40MHz)	1.79	1.74	-6.72	-3.50	4.77	-1.95	2.82	17	-14.18
6545		119	ax (80MHz)	-1.62	-1.92	-6.53	-4.94	1.25	-2.69	-1.44	17	-18.44
6705		151	ax (80MHz)	-1.48	-2.17	-6.90	-3.96	1.20	-2.30	-1.09	17	-18.09
6865		183	ax (80MHz)	-1.58	-1.89	-7.12	-4.40	1.28	-2.64	-1.36	17	-18.36
6665		143	ax (160MHz)	-3.37	-4.06	-7.03	-5.35	-0.69	-3.14	-3.83	17	-20.83
6825		175	ax (160MHz)	-3.73	-3.41	-7.12	-4.40	-0.56	-2.64	-3.20	17	-20.20


**Table 7-13. MIMO e.i.r.p. Conducted Power Spectral Density Measurements – SP**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 53 of 158



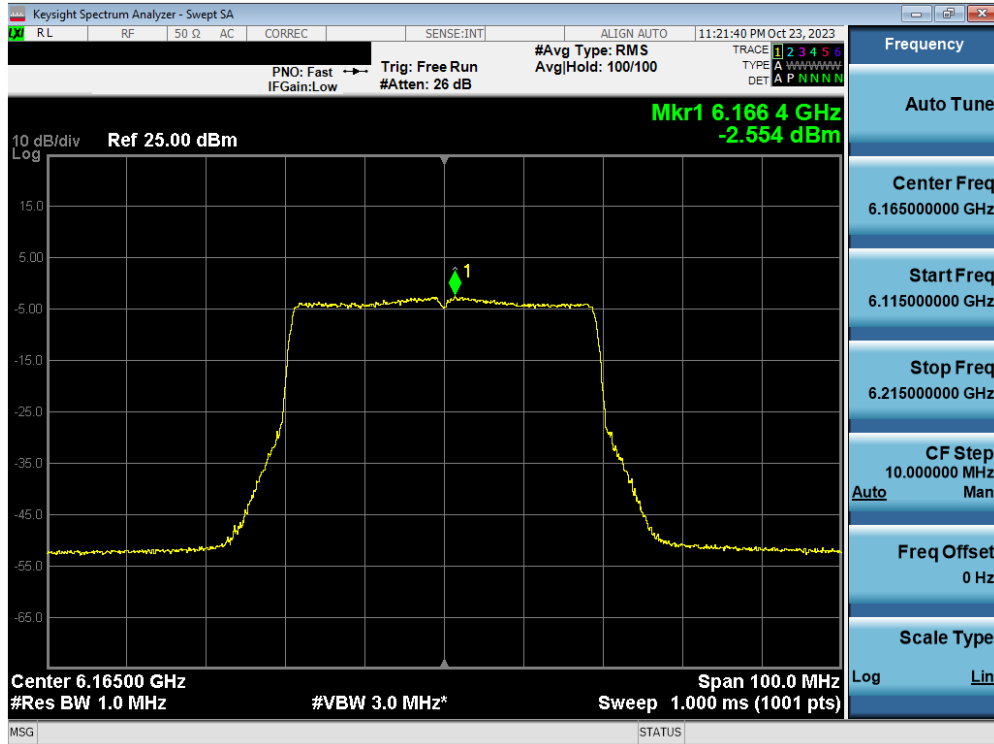

Plot 7-51. Power Spectral Density MIMO ANT1 (40MHz 802.11ax/be (UNII Band 5) – Ch. 43) - LPI

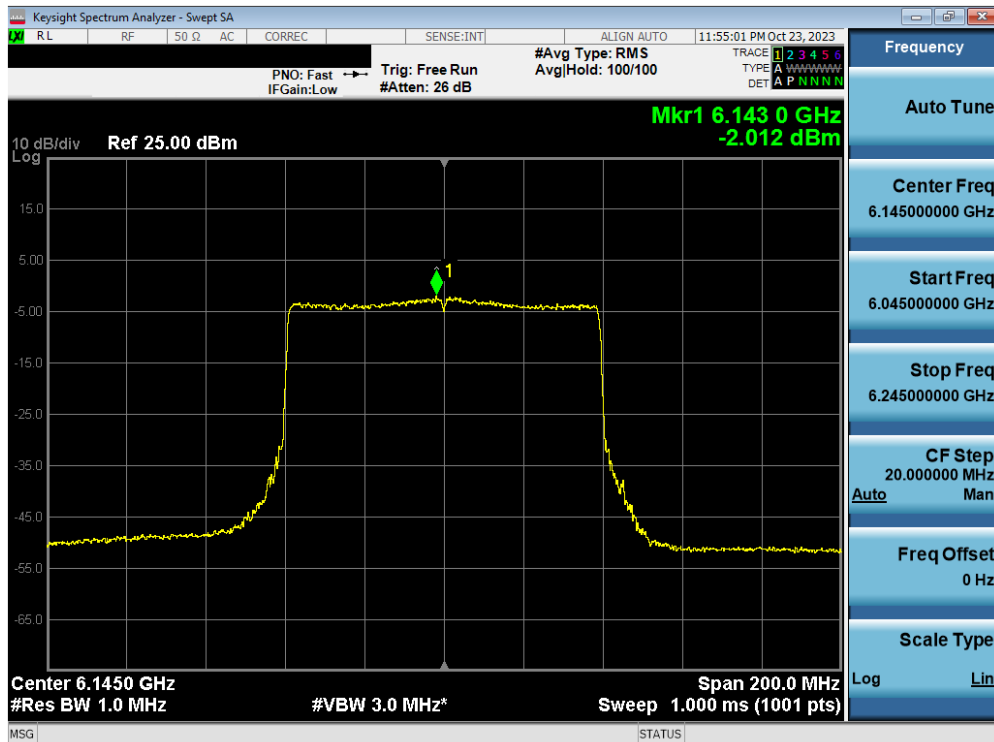

Plot 7-52. Power Spectral Density MIMO ANT1 (80MHz 802.11ax/be (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 55 of 158











### MIMO Antenna-1 Power Spectral Density Measurements - (UNII Band 6)

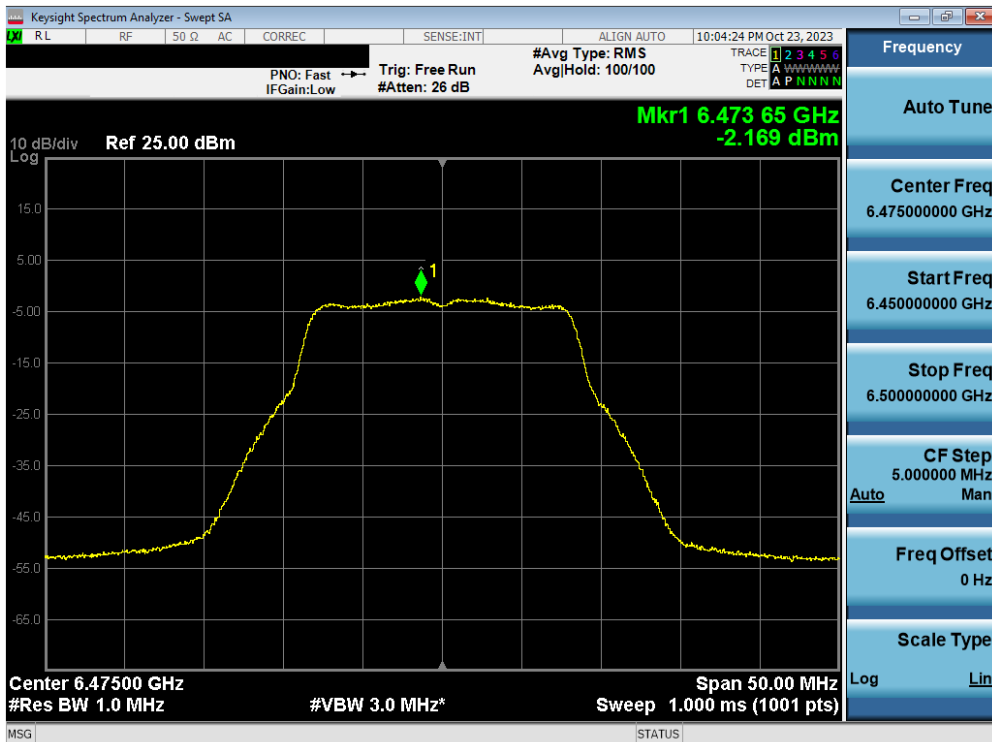


Plot 7-58. Power Spectral Density MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 105) - LPI

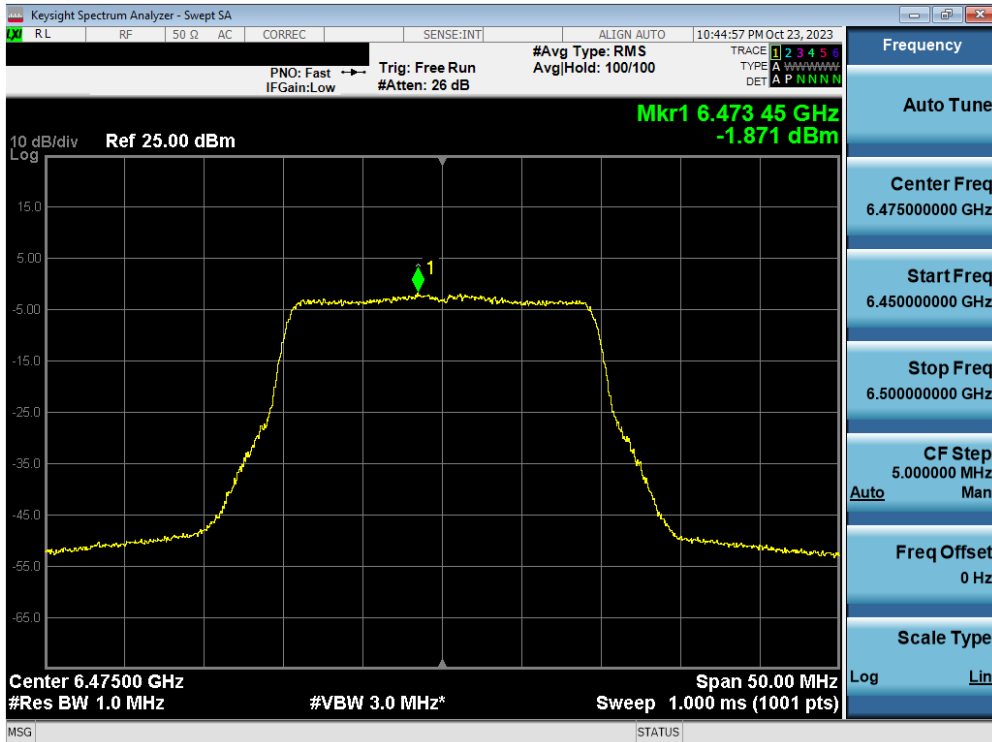


Plot 7-59. Power Spectral Density MIMO ANT1 (20MHz 802.11ax/be (UNII Band 6) – Ch. 105) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 59 of 158



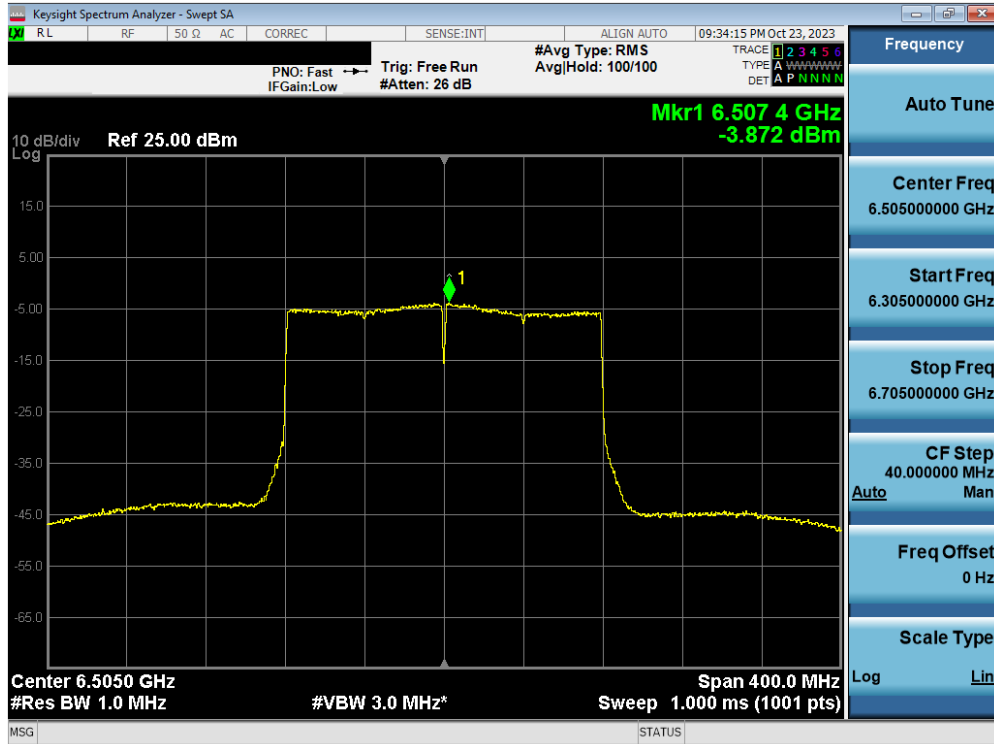


Plot 7-62. Power Spectral Density MIMO ANT1 (160MHz 802.11ax/be (UNII Band 6) – Ch. 111) - LPI

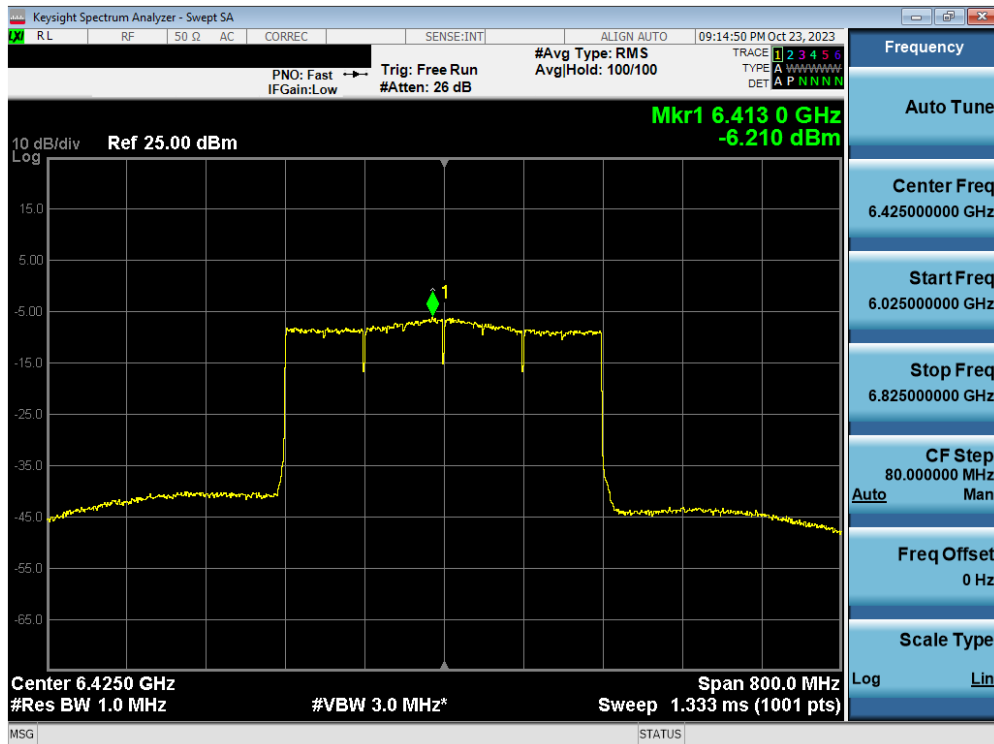


Plot 7-63. Power Spectral Density MIMO ANT1 (320MHz 802.11be (UNII Band 5/6/7) – Ch. 95) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 61 of 158

### MIMO Antenna-1 Power Spectral Density Measurements - (UNII Band 7)

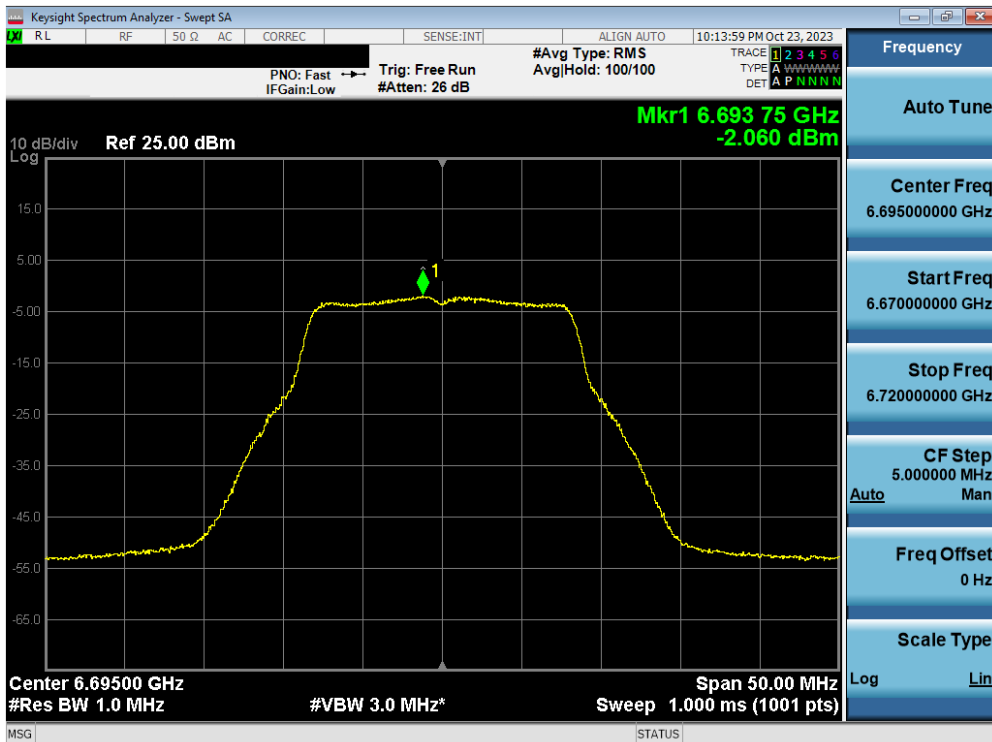

Plot 7-64. Power Spectral Density MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149) - LPI

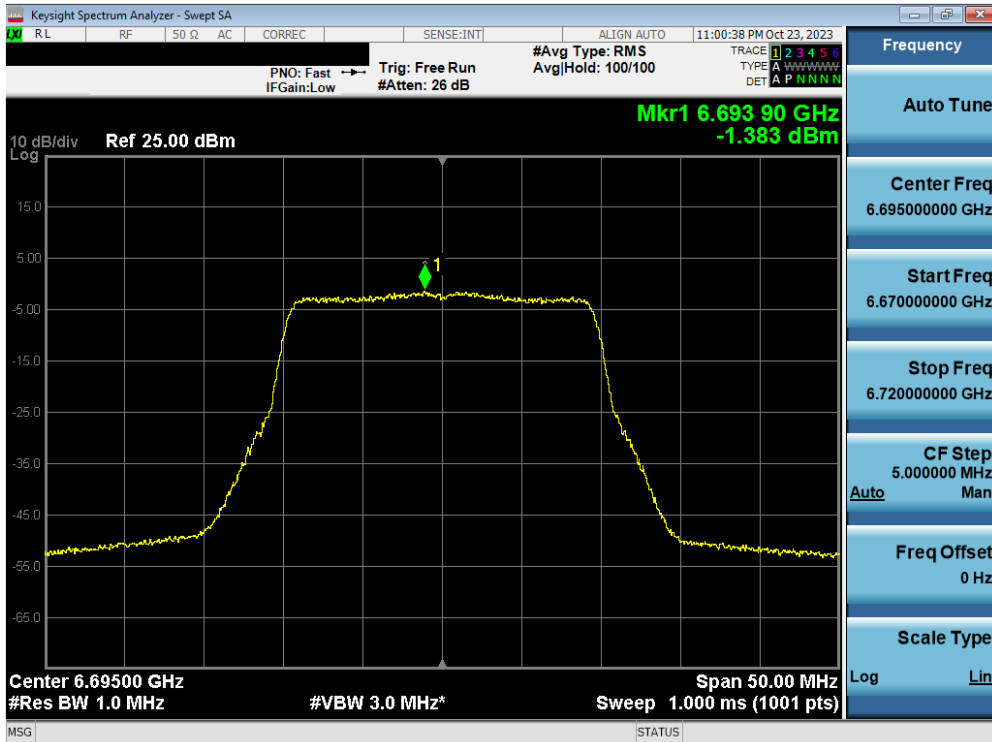


Plot 7-65. Power Spectral Density MIMO ANT1 (20MHz 802.11ax/be (UNII Band 7) – Ch. 149) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 62 of 158








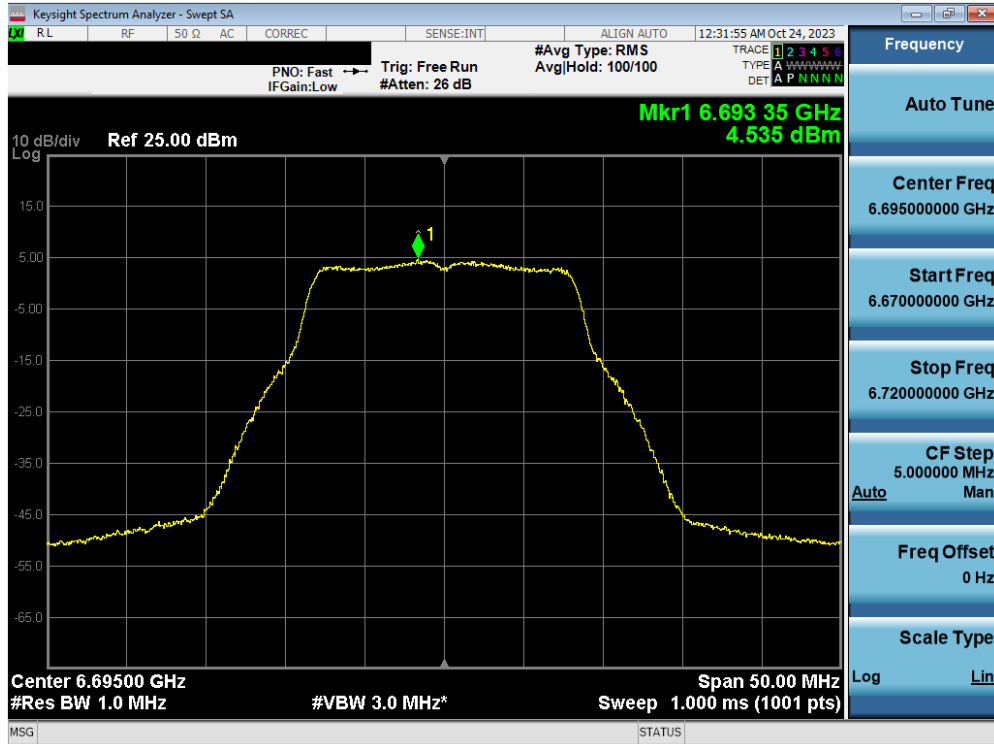


Plot 7-70. Power Spectral Density MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149) - SP

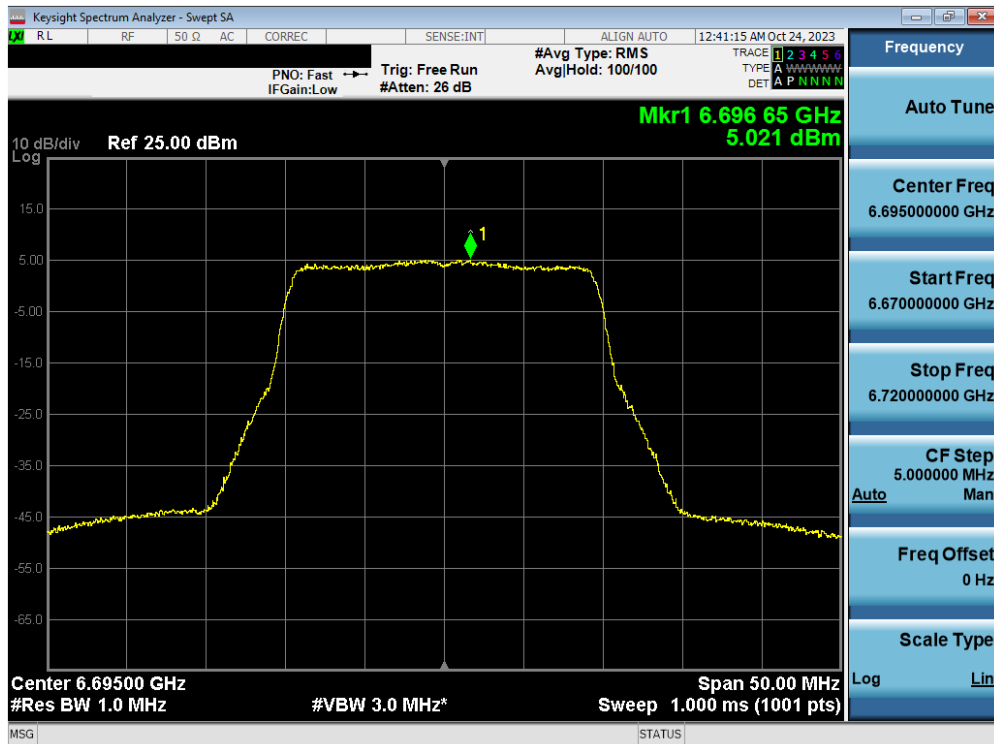

Plot 7-71. Power Spectral Density MIMO ANT1 (20MHz 802.11ax/be (UNII Band 7) – Ch. 149) - SP


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 65 of 158

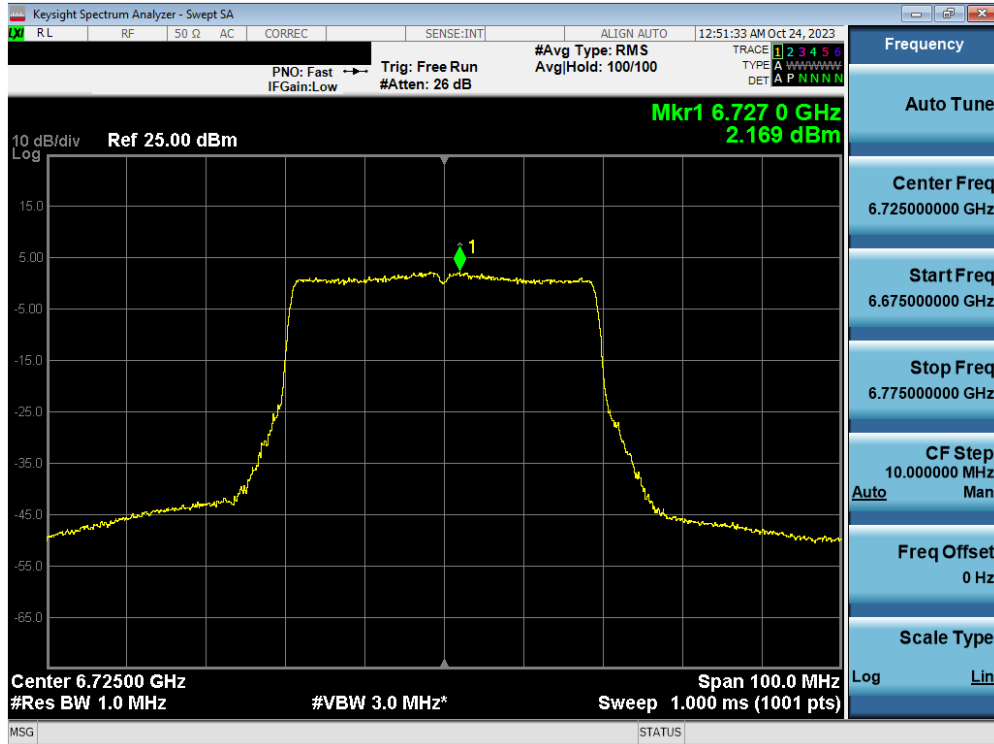


Plot 7-72. Power Spectral Density MIMO ANT1 (40MHz 802.11ax/be (UNII Band 7) – Ch. 155) - SP

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 66 of 158

### MIMO Antenna-1 Power Spectral Density Measurements - (UNII Band 8)

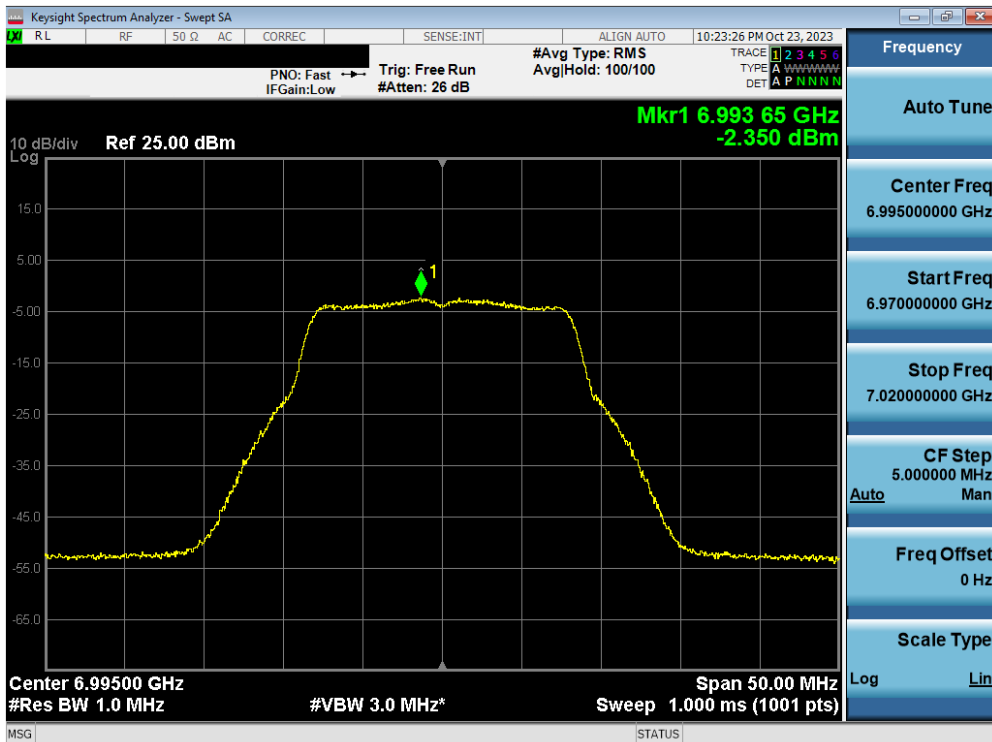


Plot 7-73. Power Spectral Density MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 209) - LPI

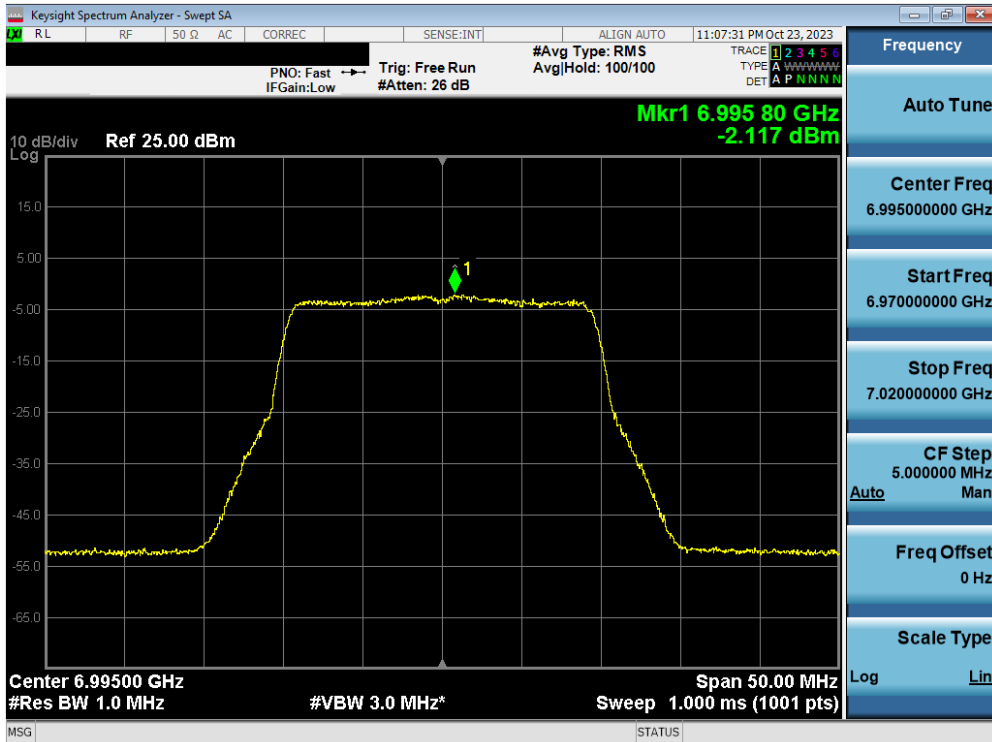


Plot 7-74. Power Spectral Density MIMO ANT1 (20MHz 802.11ax/be (UNII Band 8) – Ch. 209) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 67 of 158

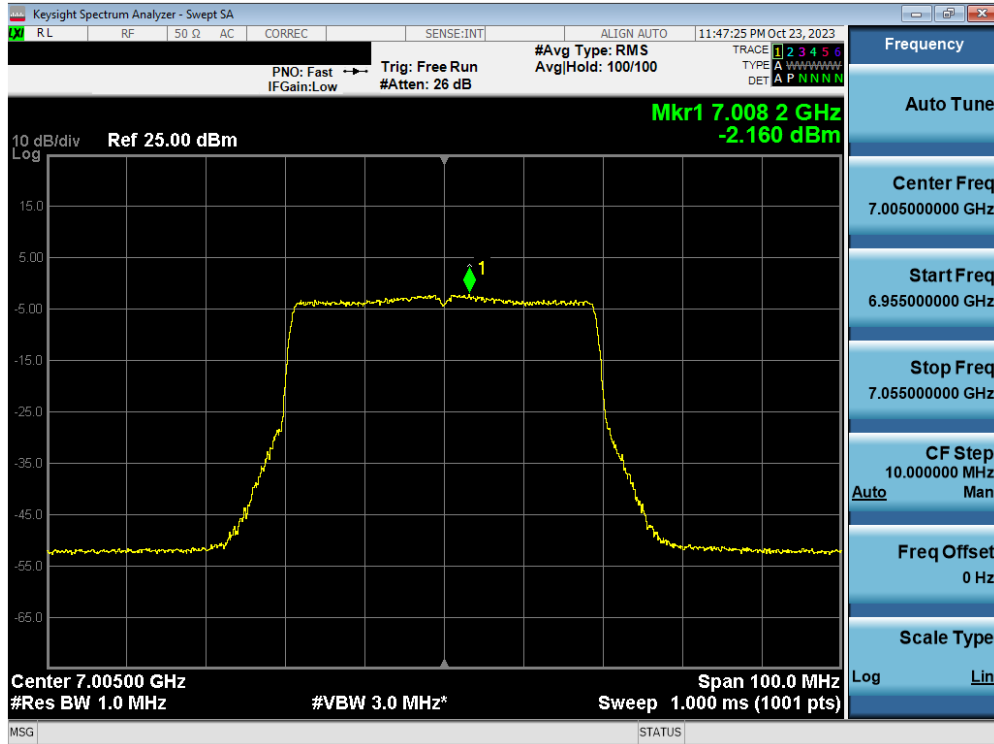


Plot 7-75. Power Spectral Density MIMO ANT1 (40MHz 802.11ax/be (UNII Band 8) – Ch. 211) - LPI

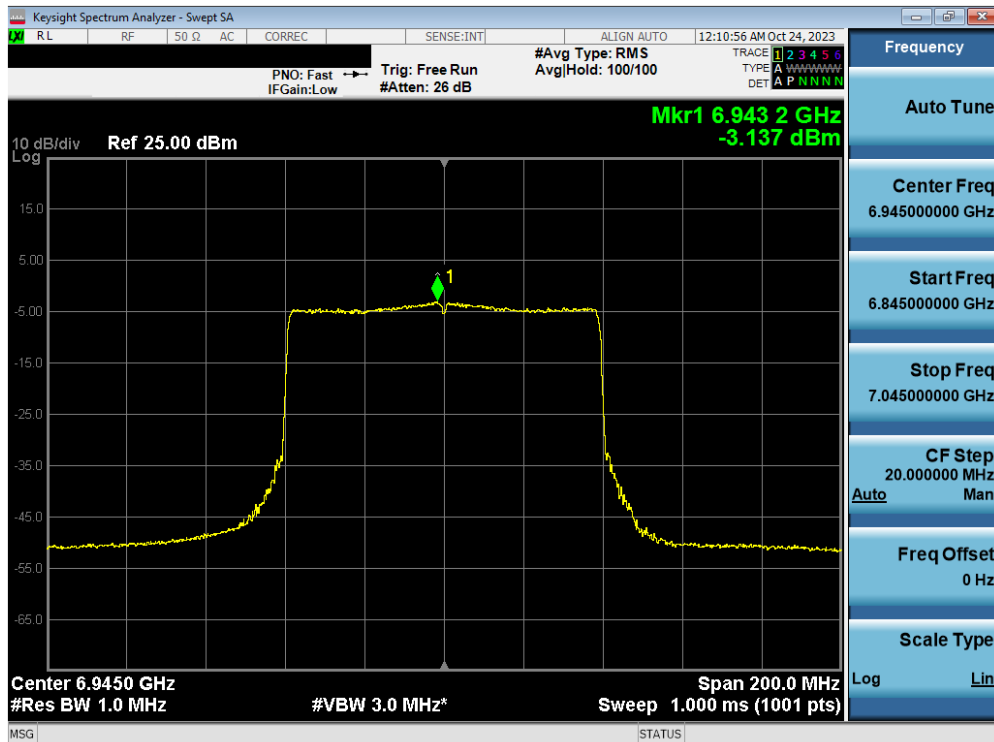


Plot 7-76. Power Spectral Density MIMO ANT1 (80MHz 802.11ax/be (UNII Band 8) – Ch. 199) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 68 of 158

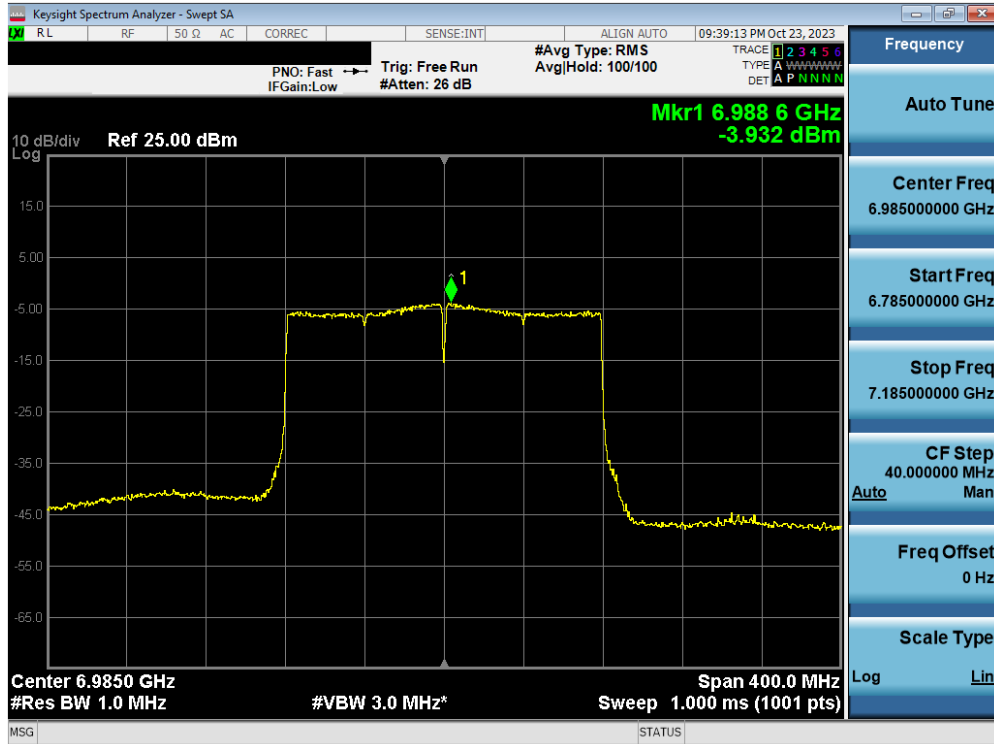


Plot 7-77. Power Spectral Density MIMO ANT1 (160MHz 802.11ax/be (UNII Band 8) – Ch. 207) - LPI

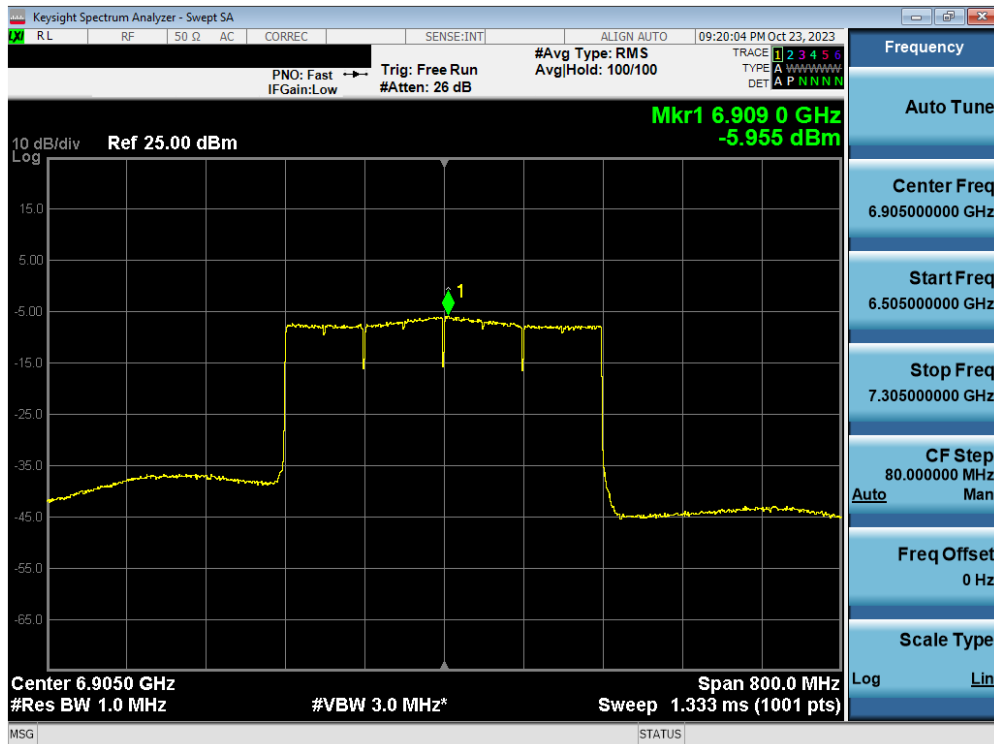


Plot 7-78. Power Spectral Density MIMO ANT1 (320MHz 802.11be (UNII Band 7/8) – Ch. 191) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 69 of 158

### MIMO Antenna-2 Power Spectral Density Measurements - (UNII Band 5)

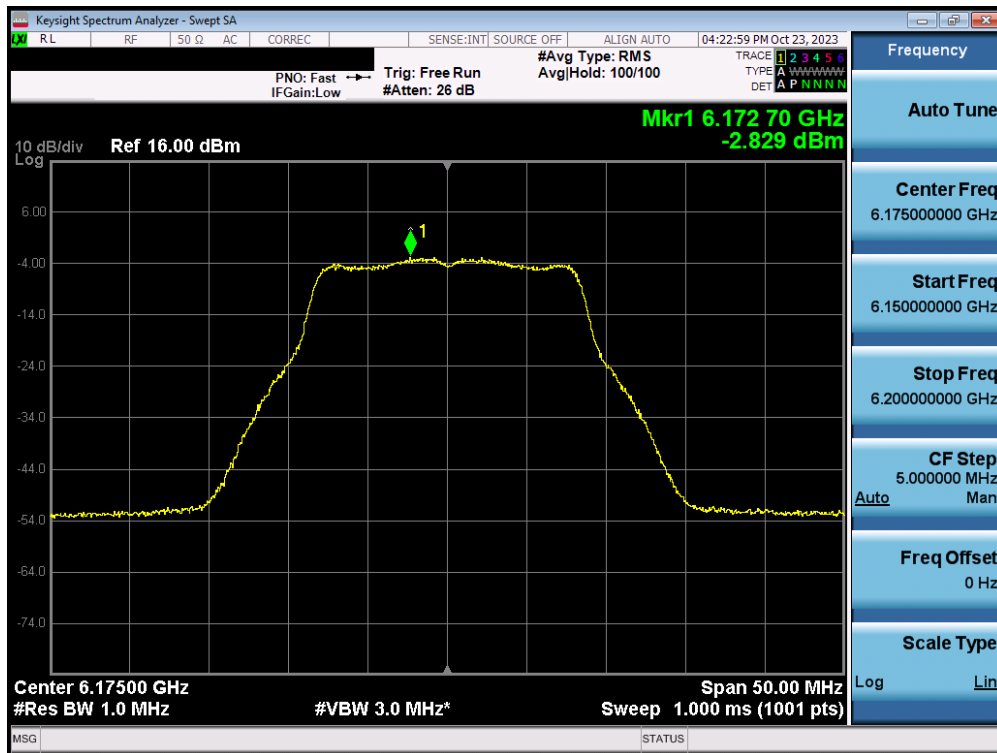


Plot 7-79. Power Spectral Density MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) - LPI

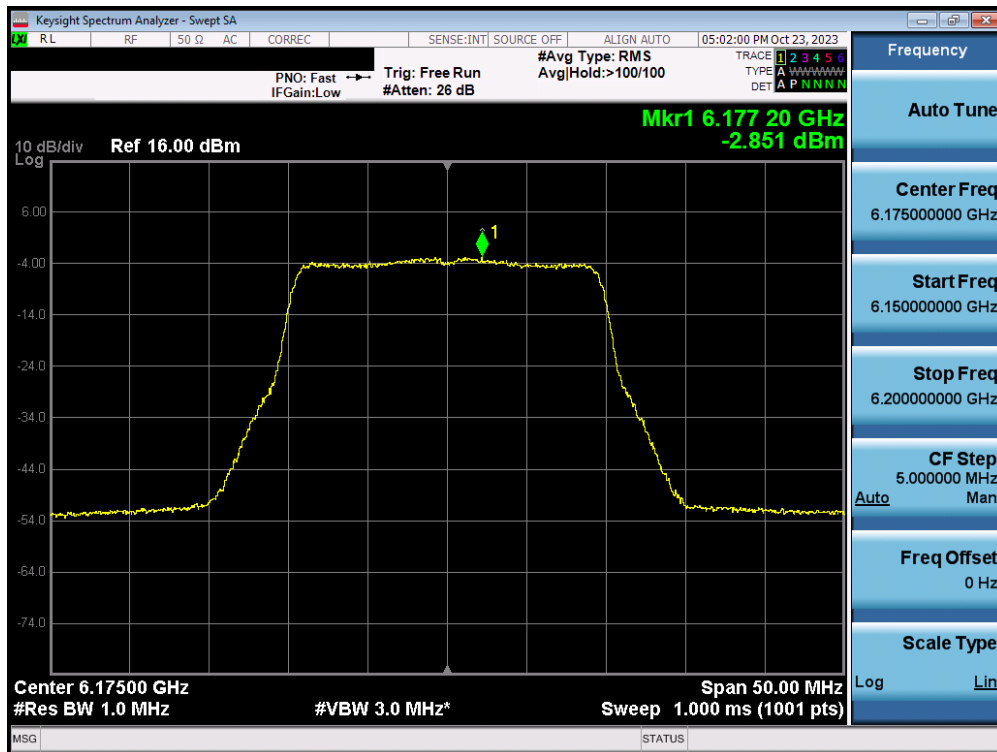


Plot 7-80. Power Spectral Density MIMO ANT2 (20MHz 802.11ax/be (UNII Band 5) – Ch. 45) – LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 70 of 158



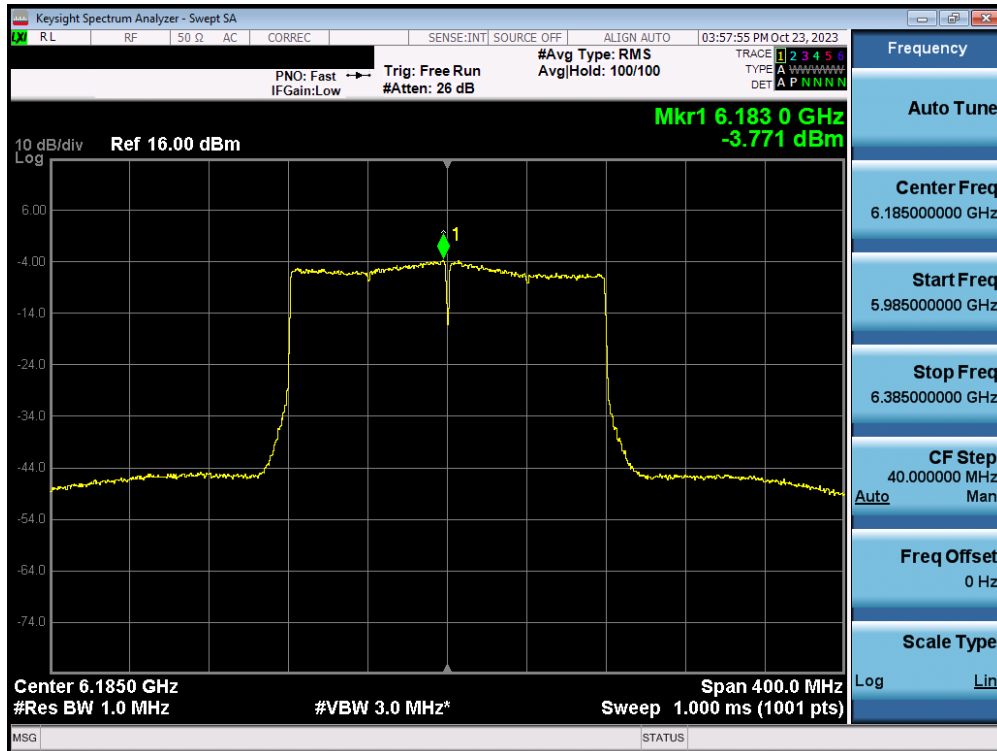


Plot 7-83. Power Spectral Density MIMO ANT2 (160MHz 802.11ax/be (UNII Band 5) – Ch. 47) - LPI

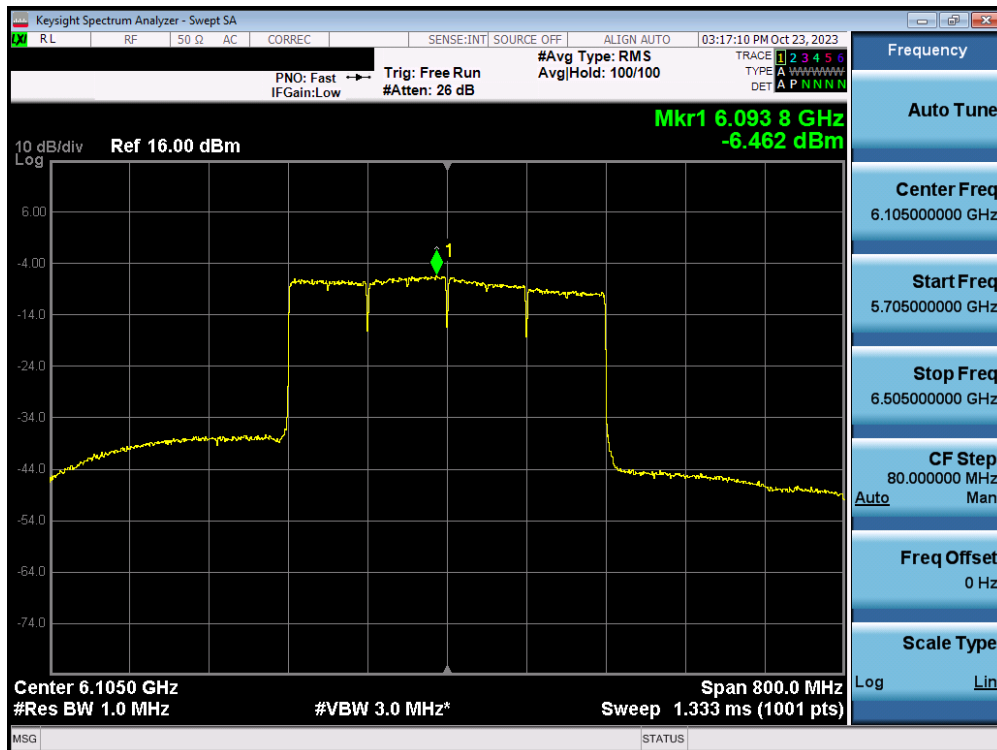


Plot 7-84. Power Spectral Density MIMO ANT2 (320MHz 802.11be (UNII Band 5) – Ch.31) – LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 72 of 158



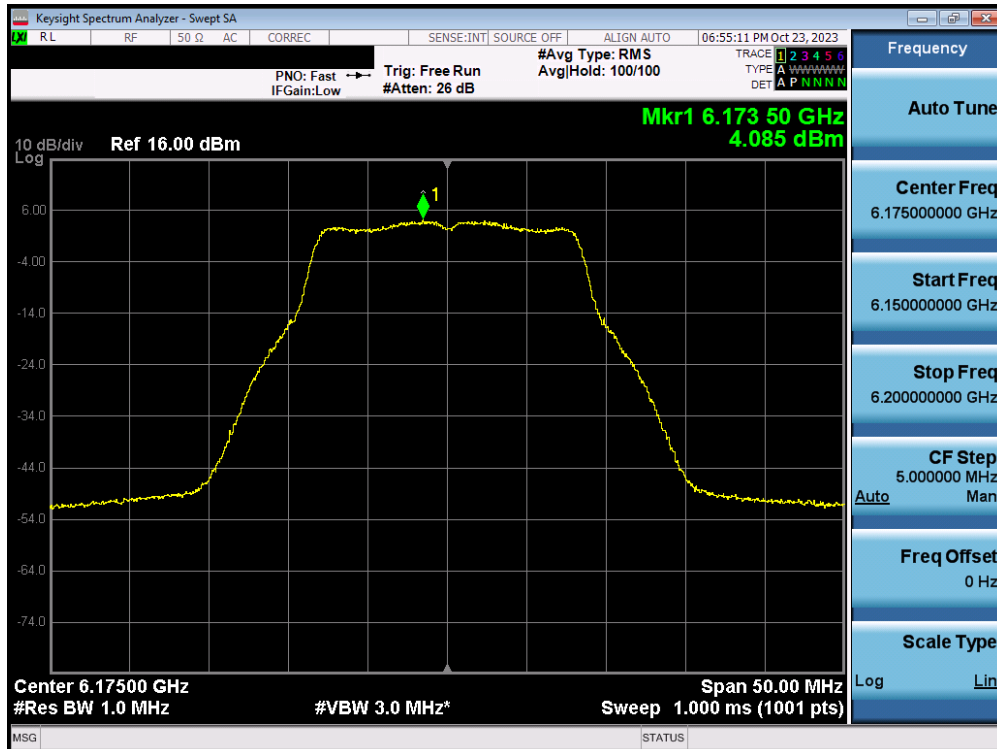


Plot 7-85. Power Spectral Density MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) - SP

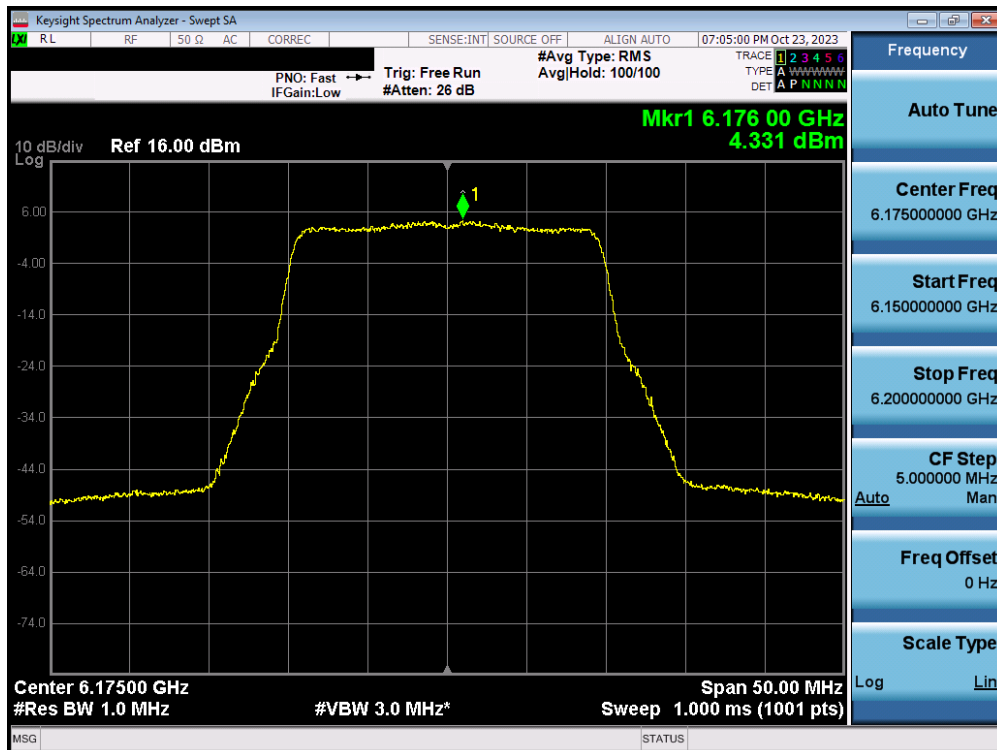

Plot 7-86. Power Spectral Density MIMO ANT2 (20MHz 802.11ax/be (UNII Band 5) – Ch. 45) - SP


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 73 of 158

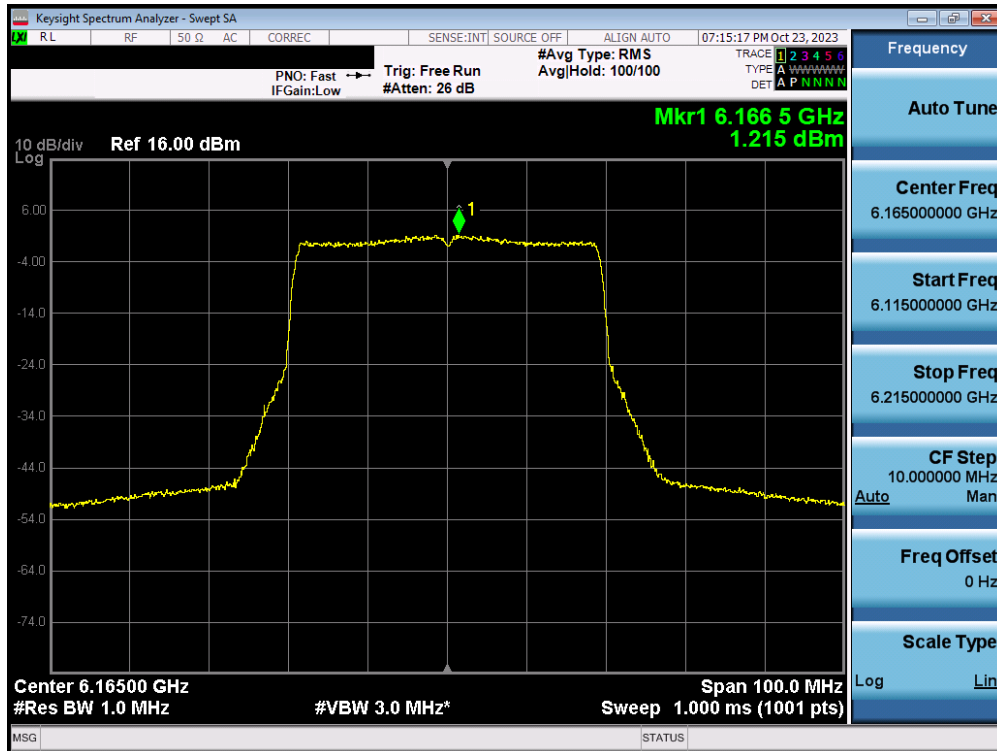


Plot 7-87. Power Spectral Density MIMO ANT2 (40MHz 802.11ax/be (UNII Band 5) – Ch. 43) - SP

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-15-R1.A3L	<b>Test Dates:</b> 8/22 – 11/09/2023	<b>EUT Type:</b> Portable Handset	Page 74 of 158

### MIMO Antenna-2 Power Spectral Density Measurements - (UNII Band 6)

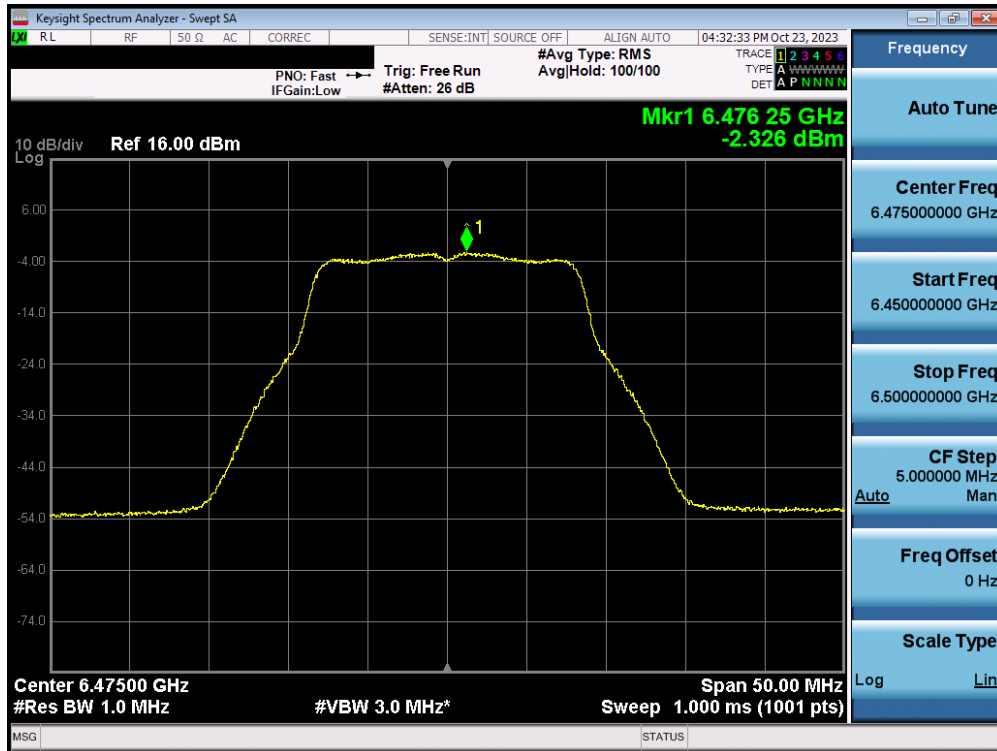


Plot 7-88. Power Spectral Density MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 105) - LPI

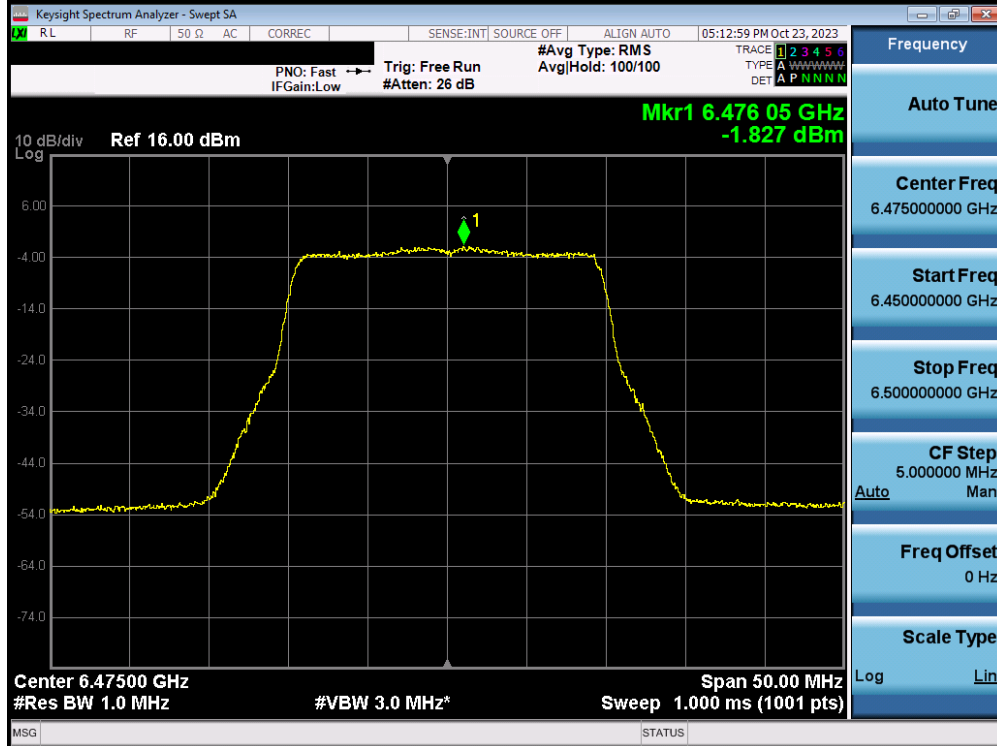


Plot 7-89. Power Spectral Density MIMO ANT2 (20MHz 802.11ax/be (UNII Band 6) – Ch. 105) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 75 of 158

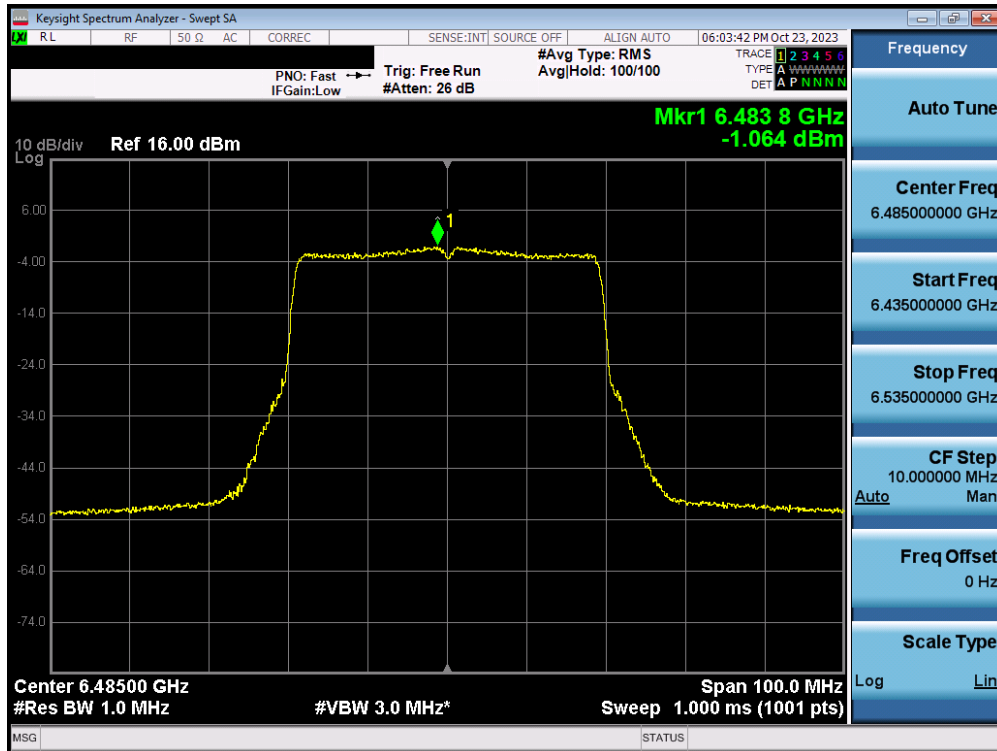


Plot 7-90. Power Spectral Density MIMO ANT2 (40MHz 802.11ax/be (UNII Band 6) – Ch. 107) - LPI

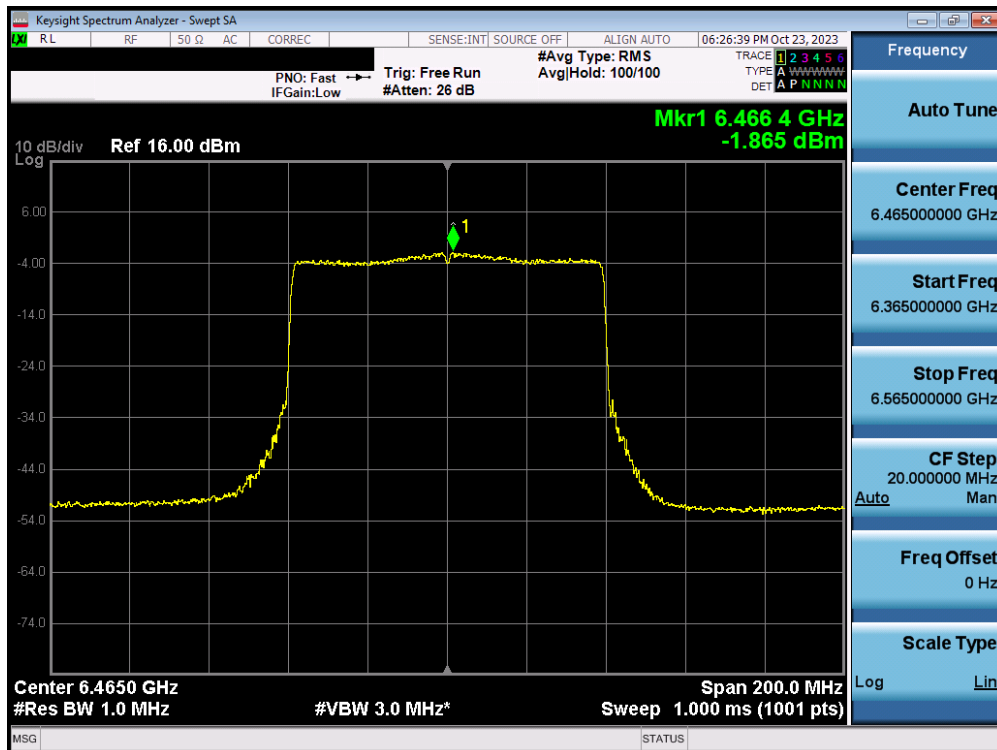

Plot 7-91. Power Spectral Density MIMO ANT2 (80MHz 802.11ax/be (UNII Band 6) – Ch. 103) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 76 of 158

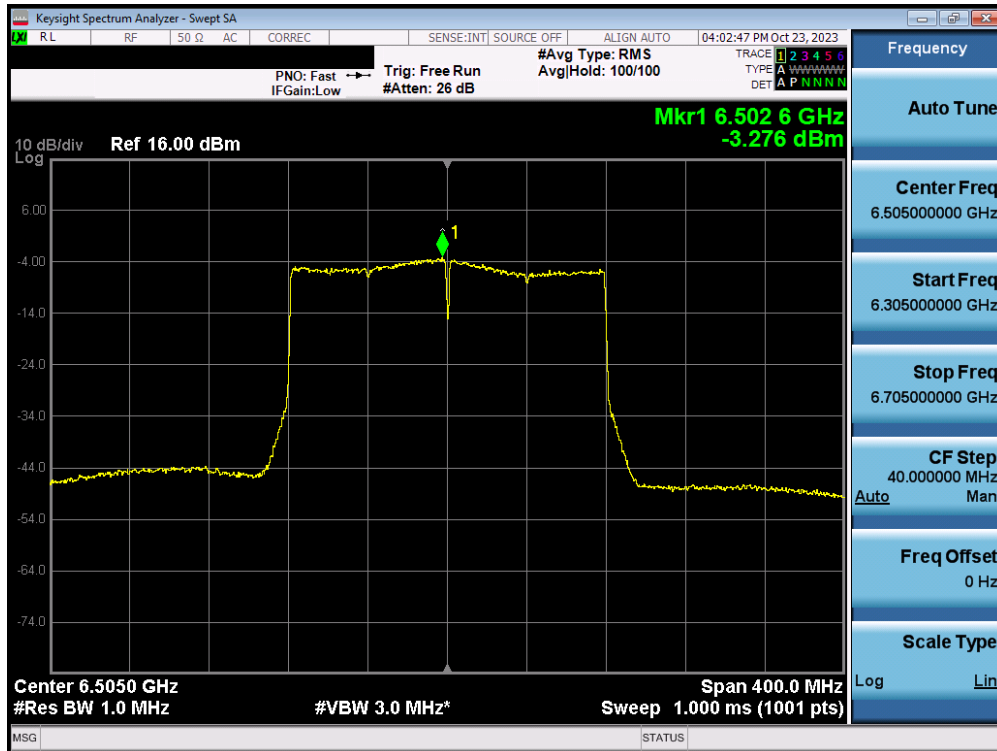


Plot 7-92. Power Spectral Density MIMO ANT2 (160MHz 802.11ax/be (UNII Band 6) – Ch. 111) - LPI




Plot 7-93. Power Spectral Density MIMO ANT2 (320MHz 802.11be (UNII Band 5/6/7) – Ch. 95) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 77 of 158

### MIMO Antenna-2 Power Spectral Density Measurements - (UNII Band 7)

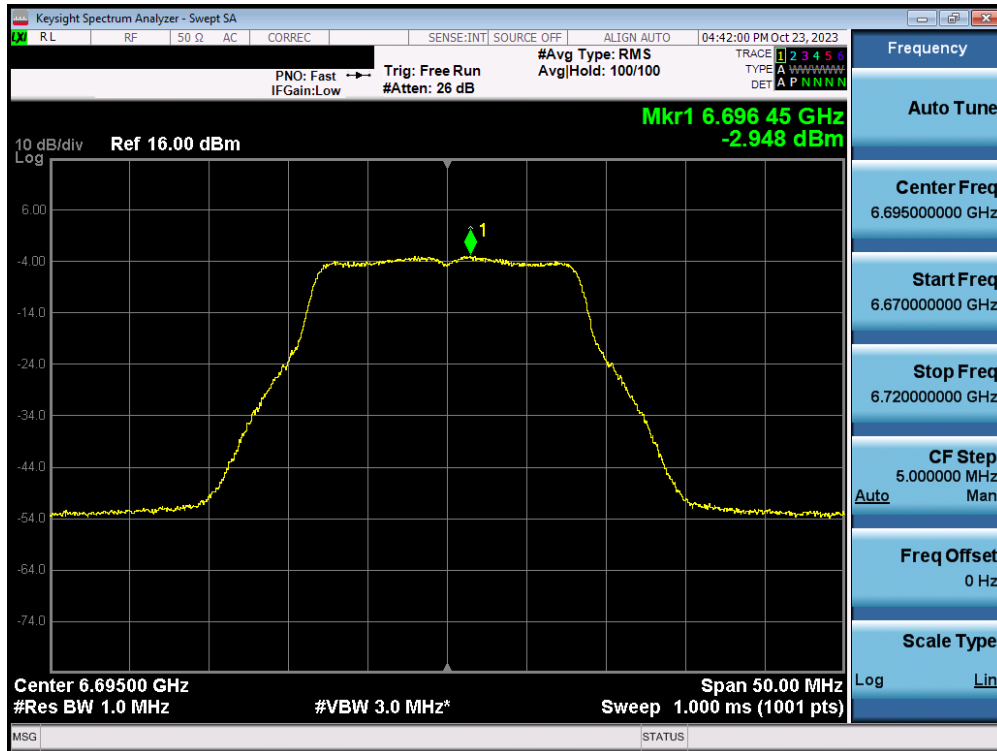

Plot 7-94. Power Spectral Density MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 149) - LPI

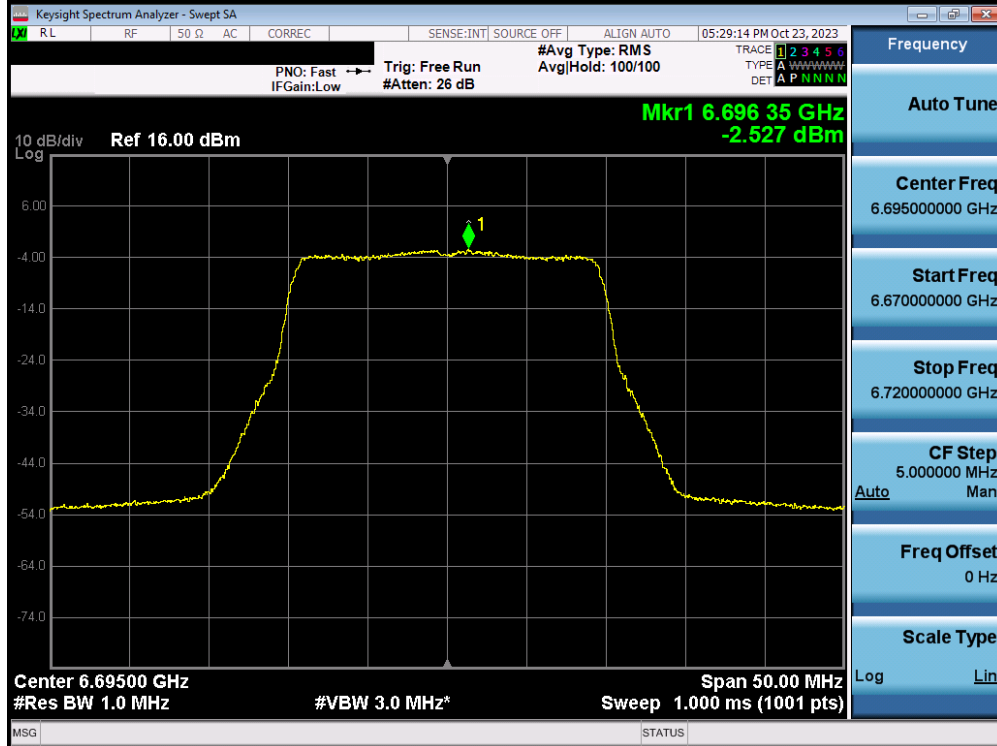

Plot 7-95. Power Spectral Density MIMO ANT2 (20MHz 802.11ax/be (UNII Band 7) – Ch. 149) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 78 of 158