



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.381.1520

<http://www.element.com>

MEASUREMENT REPORT

FCC PART 15.407 802.11a/n/ac/ax/be (OFDM)

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

09/03/2024 – 11/05/2024

Test Report Issue Date:

11/15/2024

Test Site/Location:

Element Lab., Columbia, MD, USA

Element Lab., Morgan Hill, CA, USA

Test Report Serial No.:

1M2408260066-17.A3L

FCC ID:

A3LSMS936B

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S936B/DS

Additional Model(s):

SM-S936B

EUT Type:

Portable Handset

Frequency Range:

5180 – 5885MHz

Modulation Type:

OFDM

FCC Equipment Class:

Unlicensed National Information Infrastructure TX (NII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 1 of 156

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description.....	8
2.4	Test Configuration.....	9
2.5	Software and Firmware	9
2.6	EMI Suppression Device(s) / Modifications.....	9
3.0	DESCRIPTION OF TESTS	10
3.1	Evaluation Procedure	10
3.2	AC Line Conducted Emissions	10
3.3	Radiated Emissions.....	11
3.4	Environmental Conditions.....	11
4.0	ANTENNA REQUIREMENTS	12
5.0	MEASUREMENT UNCERTAINTY	13
6.0	TEST EQUIPMENT CALIBRATION DATA.....	14
7.0	TEST RESULTS	16
7.1	Summary.....	16
7.2	26dB Bandwidth Measurement.....	18
7.2.1	MIMO Antenna-1 26dB Bandwidth Measurements	21
7.2.2	MIMO Antenna-2 26dB Bandwidth Measurements	27
7.3	6dB Bandwidth Measurement	33
7.3.1	MIMO Antenna-1 6dB Bandwidth Measurements	36
7.3.2	MIMO Antenna-2 6dB Bandwidth Measurements	46
7.4	UNII Output Power Measurement.....	56
7.5	Maximum Power Spectral Density.....	74
7.5.1	MIMO Antenna-1 Power Spectral Density Measurements	79
7.5.2	MIMO Antenna-2 Power Spectral Density Measurements	94
7.6	Radiated Emission Measurements	111
7.6.1	MIMO Radiated Spurious Emission Measurements.....	116
7.6.2	MIMO Radiated Spurious Emission Measurements – Simultaneous Transmission.....	124
7.6.3	MIMO Radiated Band Edge Measurements (20MHz BW)	126
7.6.4	MIMO Radiated Band Edge Measurements (40MHz BW)	129
7.6.5	MIMO Radiated Band Edge Measurements (80MHz BW)	132
7.6.6	MIMO Radiated Band Edge Measurements (80MHz BW - Punctured)	135
7.6.7	MIMO Radiated Band Edge Measurements (160MHz BW)	138
7.6.8	MIMO Radiated Band Edge Measurements (160MHz BW - Punctured)	141

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 2 of 156



7.7 Line-Conducted Test Data..... 144

8.0 CONCLUSION..... 156

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 3 of 156

MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	Ant1		Ant2		MIMO	
			Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	1	5180 - 5240	55.08	17.41	56.89	17.55	114.29	20.58
	2A	5260 - 5320	55.34	17.43	55.08	17.41	111.43	20.47
	2C	5500 - 5720	56.89	17.55	55.59	17.45	114.02	20.57
	3	5745 - 5825	57.02	17.56	56.10	17.49	117.73	20.71
	4	5845 - 5885	18.75	12.73	24.04	13.81	88.51	19.47
40	1	5190 - 5230	34.51	15.38	35.48	15.50	74.99	18.75
	2A	5270 - 5310	35.02	15.44	34.83	15.42	73.45	18.66
	2C	5510 - 5710	35.92	15.55	35.73	15.53	75.16	18.76
	3	5755 - 5795	34.14	15.33	35.40	15.49	71.78	18.56
	4	5835 - 5875	15.61	11.93	15.42	11.88	55.08	17.41
80	1	5210	21.28	13.28	23.77	13.76	46.34	16.66
	2A	5290	26.67	14.26	27.86	14.45	57.54	17.60
	2C	5530 - 5690	28.44	14.54	27.86	14.45	58.88	17.70
	3	5775	27.04	14.32	26.92	14.30	57.28	17.58
	4	5855	12.71	11.04	11.56	10.63	45.39	16.57
160	1/2A	5250	21.68	13.36	23.55	13.72	47.21	16.74
	2C	5570	22.23	13.47	21.88	13.40	43.85	16.42
	3/4	5815	10.00	10.00	9.77	9.90	34.36	15.36

EUT Overview

Note: The UNII Band 4 max power values shown in the above table are e.i.r.p values.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 4 of 156

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. ("MD")

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

Measurements were performed at Element located in Morgan Hill, CA 95037, U.S.A. ("CA")

- Element is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 5 of 156

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS936B**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 2054M, 2284M, 1150M, 1292M, 1182M, 1250M, 2066M, 1295M, 1259M, 1258M

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, 850/1900 GSM/GPRS/EDGE, Multi-Band LTE, MultiBand 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825	177	5885

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755	167	5835
:	:	:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795	175	5875
				:	:				
				142	5710				

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775	167	5835
				:	:				
				122	5610				
				:	:				
				138	5690				

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 1/2A		Band 2C		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570	163	5815

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 6 of 156

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		ANT1				ANT2				MIMO (1+2)			
		Duty Cycle [%]	Pulse Width	Period	Radiated DCCF [dB]	Duty Cycle [%]	Pulse Width	Period	Radiated DCCF [dB]	Duty Cycle [%]	Pulse Width	Period	Radiated DCCF [dB]
5GHz	a	96.60	1.151	1.250	0.15	96.60	1.152	1.251	0.15	96.68	0.600	0.698	0.15
	n (HT20)	92.65	1.248	1.347	0.33	92.58	1.247	1.347	0.34	86.71	0.648	0.747	0.62
	ac (VHT20)	92.67	1.252	1.351	0.33	92.67	1.252	1.351	0.33	86.78	0.652	0.751	0.62
	ax (HE20)	99.65	5.446	5.465	N/A	99.65	5.446	5.465	N/A	99.65	5.454	5.473	N/A
	be (EHT20)	99.65	5.454	5.473	N/A	99.63	5.453	5.473	N/A	99.65	5.447	5.466	N/A
	n (HT40)	92.61	1.228	1.326	0.33	92.61	1.228	1.326	0.33	92.79	1.249	1.346	0.33
	ac (VHT40)	98.65	1.320	1.338	N/A	99.02	1.320	1.333	N/A	99.89	0.880	0.881	N/A
	ax (HE40)	99.67	5.446	5.464	N/A	99.67	5.446	5.464	N/A	99.67	5.453	5.471	N/A
	be (EHT40)	99.67	5.454	5.472	N/A	99.69	5.454	5.471	N/A	99.67	5.447	5.465	N/A
	ac (VHT80)	96.60	1.151	1.250	0.15	96.60	1.152	1.251	0.15	96.68	0.600	0.698	0.15
	ax (HE80)	99.65	5.445	5.464	N/A	99.67	5.446	5.464	N/A	99.67	5.453	5.471	N/A
	be (EHT80)	99.67	5.453	5.471	N/A	99.67	5.453	5.471	N/A	99.67	5.447	5.465	N/A
	ac (HT160)	92.11	1.155	1.254	0.36	92.19	1.156	1.254	0.35	85.93	0.603	0.702	0.66
	ax (HE160)	99.67	5.453	5.471	N/A	99.69	5.454	5.471	N/A	99.67	5.453	5.471	N/A
	be (EHT160)	99.67	5.451	5.469	N/A	99.67	5.447	5.465	N/A	99.67	5.447	5.465	N/A

Table 2-5. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ac	✓	✓	✓	✓	✓	✓
	11ax	✓	✓	✓	✓	✓	✓
	11be	✓	✓	✓	✓	✓	✓

Table 2-6. Antenna / Technology Configuration

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 7 of 156

3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index				Spatial Stream	OFDM (802.11n/802.11ac)				OFDM (802.11ac)				OFDM (802.11ax/be)											
20MHz						20MHz		40MHz		80MHz		160MHz		20MHz			40MHz			80MHz			160MHz		
	0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI		0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	
6	0	0	0	0	1	6.5	7.2	13.5	15	29.3	32.5	58.5	65	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	1	1	1	1	1	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	2	2	2	2	1	19.5	21.7	40.5	45	87.8	97.5	175.5	195	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	3	3	3	3	1	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	4	4	4	4	1	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	5	5	5	5	1	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	6	6	6	6	1	58.5	65	121.5	135	263.3	292.5	526.5	585	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	7	7	7	7	1	65	72.2	135	150	292.5	325	585	650	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
		8	8	8	1	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
		9	9	9	1	N/A	N/A	180	200	390	433.3	780	866.7	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
			10	10	1									129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
			11	11	1									143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
				12	1									154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
				13	1									172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
6	8	0	0	0	2	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	9	1	1	1	2	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	10	2	2	2	2	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	11	3	3	3	2	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	12	4	4	4	2	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	13	5	5	5	2	104	115.6	216	240	468	520	936	1040	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	14	6	6	6	2	117	130	243	270	526.5	585	1053	1170	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	15	7	7	7	2	130	144.4	270	300	585	650	1170	1300	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
		8	8	8	2	156	173.3	324	360	702	780	1404	1560	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
		9	9	9	2	N/A	N/A	360	400	780	866.7	1560	1733.3	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
			10	10	2									258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
			11	11	2									286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7
			12	12	2									309.7	292.5	263.3	619.4	585	526.5	1297.1	1225	1102.5	2594.1	2450	2205
			13	13	2									344.1	325	292.5	688.2	650	585	1441.2	1361.1	1225	2882.4	2722.2	2450

Table 2-7. Supported Data Rates

2.3 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Directional Gain (dBi)
5.20	-5.00	-6.85	-2.87
5.22	-5.19	-6.00	-2.58
5.25	-5.02	-5.68	-2.33
5.28	-3.27	-5.41	-1.26
5.30	-4.58	-4.70	-1.63
5.5	-4.40	-5.36	-1.86
5.6	-4.82	-5.13	-1.95
5.7	-3.86	-5.50	-1.63
5.785	-3.52	-4.80	-1.13
5.8	-4.11	-5.06	-1.56
5.805	-4.59	-3.98	-1.27
5.85	-4.61	-4.30	-1.44
5.885	-4.88	-3.65	-1.23

Table 2--8. Antenna Peak Gain by Frequency

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 8 of 156

Frequency [GHz]	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Directional Gain (dBi)
5.15-5.25	-5.02	-5.68	-2.33
5.25-5.35	-3.27	-5.41	-1.26
5.47-5.725	-3.86	-5.50	-1.63
5.725-5.85	-3.52	-4.80	-1.13
5.85-5.895	-4.88	-3.65	-1.23

Table 2--9. Antenna Peak Gain by Band

2.4 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 7.6 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: NQ-WC-06 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with software/firmware version S936BXXU0AXHJ installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 9 of 156

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 10 of 156

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 11 of 156

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 12 of 156

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget – MD

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.65
Line Conducted Disturbance	2.71
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (30MHz - 1GHz)	4.30
Radiated Disturbance (1 - 18GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

Table 5-2. Measurement Uncertainty Budget – CA

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 13 of 156

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	4/2/2024	Annual	4/2/2025	WL40-1
-	AP1-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP1-002
-	ETS-001	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-001
-	ETS-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-002
-	MD 1M 18-40	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	MD 1M 18-40
Anritsu	MA24408A	Microwave Peak Power Sensor	5/21/2024	Annual	5/21/2025	11675
Anritsu	MA24408A	Microwave Peak Power Sensor	4/10/2024	Annual	4/10/2025	12798
ETS-Lindgren	3116C	Horn Antenna (18-40GHz)	2/27/2023	Biennial	2/27/2025	218893
Rohde & Schwarz	TC-TA 18	Vivaldi Antenna	2/23/2023	Biennial	2/23/2025	26040036
Rohde & Schwarz	FSW26	Signal and Spectrum Analyzer (26.5GHz)	3/8/2024	Annual	3/8/2025	103187
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/11/2023	Annual	9/11/2024	100348
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	4/5/2024	Annual	4/5/2025	101716
Pasternak	NMLC-2	EMI Test Receiver (2Hz to 44GHz)	4/2/2024	Annual	4/2/2025	NMLC-2
Rohde & Schwarz	ENV216	Two-Line V-Network	1/31/2023	Biennial	1/31/2025	101379
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	4/9/2024	Annual	4/9/2025	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	2/29/2024	Annual	3/1/2025	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/19/2024	Annual	9/19/2025	MY57141001
Sunol	JB6	JB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Rohde & Schwarz	SMW200A	Vector Signal Generator	4/4/2024	Annual	4/4/2025	109456

Table 6-1. Test Equipment Calibration Table – MD

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	5/29/2024	Annual	11/29/2024	102132
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/15/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	7/5/2024	Annual	7/5/2025	101366
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 6-2. Test Equipment Calibration Table – CA

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 14 of 156



Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 15 of 156

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS936B
 FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference	Test Lab Location
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2	MD
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz and 5850 – 5895MHz)		PASS	Section 7.3	MD
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4	MD
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5	MD
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report	MD
15.407(b)(1), (b)(2), (b)(3), (b)(4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6	CA
15.205, 15.407(b)(1), (b)(4), (b)(5), (b)(6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6	CA
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.7	MD

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.5.0.
- 6) Data was leveraged from model SM-S936U for the certification of SM-S936B. See Table 7-2 for spot-check results.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 16 of 156

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: SM-S936U	Variant Model: SM-S936B	Deviation (dB)	Max Deviation (dB)	Pass/Fail
2.1046, 15.407(a)(8)	Conducted Output Power	Mid Channel Each UNII Band - 802.11a 20MHz	dBm	N/A	20.67	20.64	-0.03	1	PASS
15.209, 15.407(b)(1), 15.407(b)(2), 15.407(b)(3), 15.407(b)(4)	Radiated Spurious Emissions	802.11a MIMO Ch.52 - 7364 - Average	dBm	53.98	48.12	48.68	0.56	3	PASS
15.209	Radiated Band Edge Emissions	802.11n MIMO Ch.36 - Average	dBm	53.98	51.9	51.04	-0.86	3	PASS

Table 7-2. Summary of Spot-checks


5GHz WIFI (20MHz 802.11a MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5200	40	17.44	17.56	20.51	23.98	-3.47	-2.33	18.18	30.00	-11.82
UNII-2A	5300	60	17.11	17.72	20.44	23.98	-3.54	-1.26	19.18	30.00	-10.82
UNII-2C	5600	120	17.38	17.63	20.52	23.98	-3.46	-1.63	18.89	30.00	-11.11
UNII-3	5785	157	17.24	17.84	20.56	30.00	-9.44	-1.13	19.43	36.00	-16.57
UNII-4	5865	173	17.48	17.78	20.64	-	-	-1.23	19.41	30.00	-10.59

Table 7-3. Conducted Output Power Measurements (Spot-check)

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	2A	52	5260	7364.00	Average	H	270	266	-68.25	9.93	0.00	48.68	53.98	-5.30

Table 7-4. Radiated Measurements MIMO (Spot-check)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

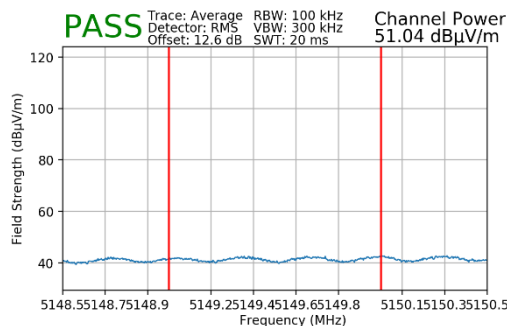

Plot 7-1. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

- Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.
- All test cases were performed to verify the variant EUT is still in compliance with the spot checked results to the reference device and was performed using the guidance of ANSI C63.10-2013.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 17 of 156

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All cases were investigated; a subset of the plots is included to represent relevant settings and measurements.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 18 of 156

MIMO 26dB Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]
Band 1	5180	36	a	21.11	21.12
	5200	40	a	21.45	21.09
	5240	48	a	21.11	20.41
	5180	36	n	20.96	20.95
	5200	40	n	21.70	20.75
	5240	48	n	21.41	21.09
	5180	36	be SU	21.86	22.01
	5200	40	be SU	21.51	21.66
	5240	48	be SU	21.54	21.58
	5190	38	n	42.29	42.34
	5230	46	n	42.85	43.41
	5190	38	be SU	42.33	42.41
	5230	46	be SU	42.40	42.16
	5210	42	ac	93.17	90.86
	5210	42	be SU	90.42	90.55
Band 1/2A	5250	50	ac	180.77	173.50
	5250	50	be SU	174.86	173.59
Band 2A	5260	52	a	20.88	20.50
	5280	56	a	21.21	20.83
	5320	64	a	21.24	21.14
	5260	52	n	21.54	21.30
	5280	56	n	21.35	20.99
	5320	64	n	21.55	21.05
	5260	52	be SU	21.92	21.59
	5280	56	be SU	21.74	21.59
	5320	64	be SU	21.69	21.45
	5270	54	n	44.66	42.19
	5310	62	n	41.84	42.73
	5270	54	be SU	41.71	42.09
	5310	62	be SU	43.24	42.93
	5290	58	ac	92.35	91.96
	5290	58	be SU	88.48	90.12
Band 2C	5500	100	a	21.34	20.83
	5600	120	a	21.29	21.18
	5720	144	a	21.12	21.14
	5500	100	n	21.21	21.17
	5600	120	n	21.56	21.04
	5720	144	n	21.36	21.29
	5500	100	be SU	21.68	21.52
	5600	120	be SU	22.25	21.61
	5720	144	be SU	22.32	21.95
	5510	102	n	41.62	42.57
	5590	118	n	41.55	41.72
	5710	142	n	41.92	42.19
	5510	102	be SU	42.77	41.65
	5590	118	be SU	42.27	42.38
	5710	142	be SU	42.11	42.60
	5530	106	ac	91.19	92.14
	5610	122	ac	91.02	91.78
	5690	138	ac	91.85	92.66
	5530	106	be SU	88.78	90.56
	5610	122	be SU	91.83	88.62
	5690	138	be SU	89.68	89.61
	5570	114	ac	173.71	173.52
	5570	114	be SU	175.47	176.86

Table 7-5. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements MIMO


FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 19 of 156

	Frequency [MHz]	Channel	802.11 MODE	Puncture Size [MHz]	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]
Band 1	5210	42	be	20	80.65	79.02
Band 1/2A	5250	50	be	20	174.50	172.60
Band 2A	5290	58	be	20	79.80	80.36
Band 2C	5610	122	be	20	79.55	79.86
	5570	114	be	20	162.70	161.40


Table 7-6. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements MIMO – Punctured Cases

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 20 of 156

7.2.1 MIMO Antenna-1 26dB Bandwidth Measurements

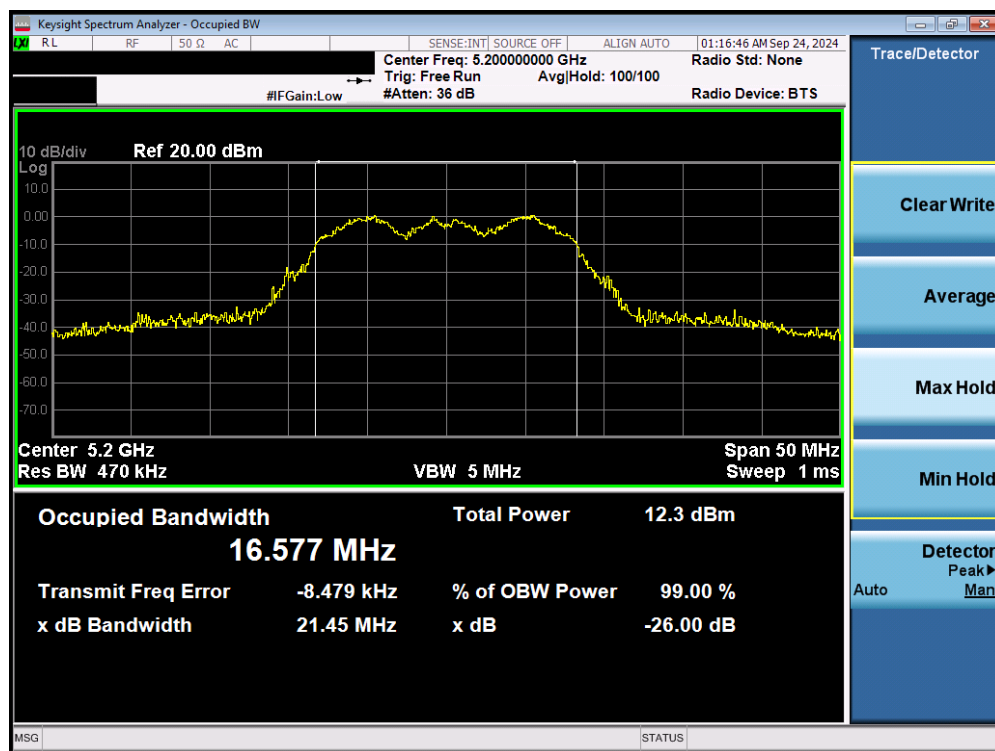


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 1) – Ch. 40)

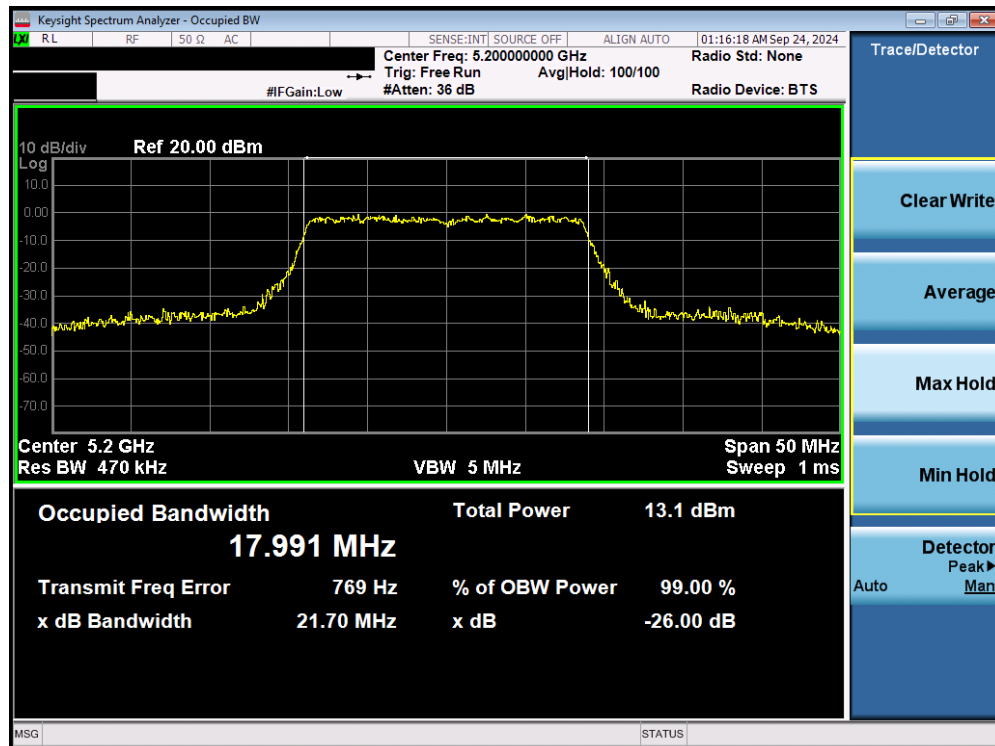


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11n (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 21 of 156

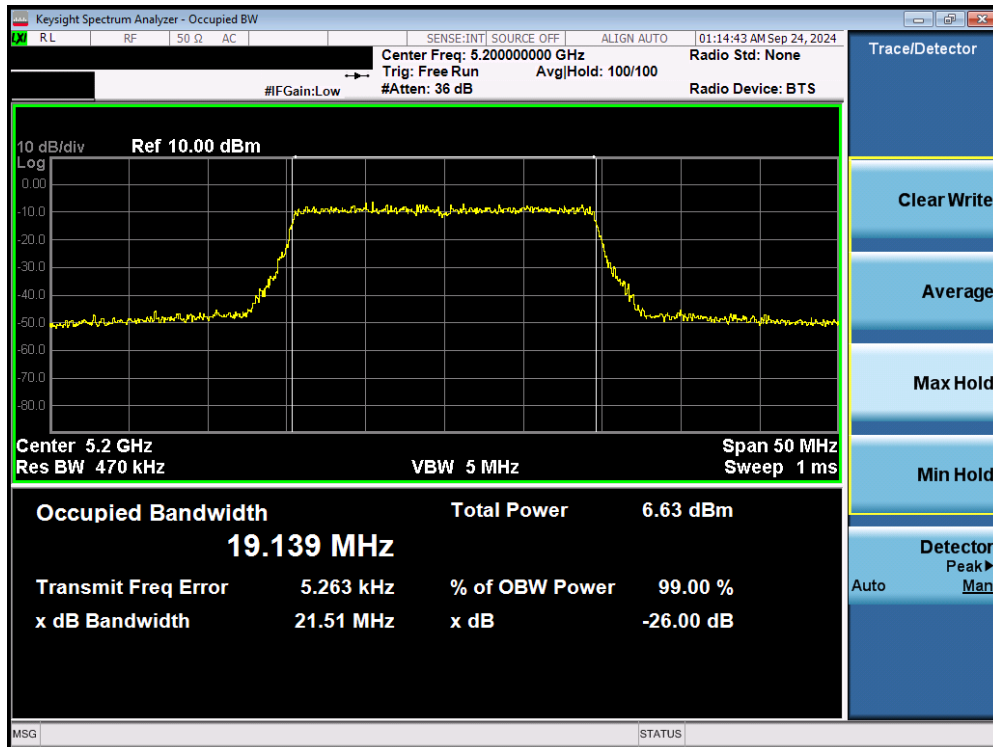


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 1) – Ch. 40)

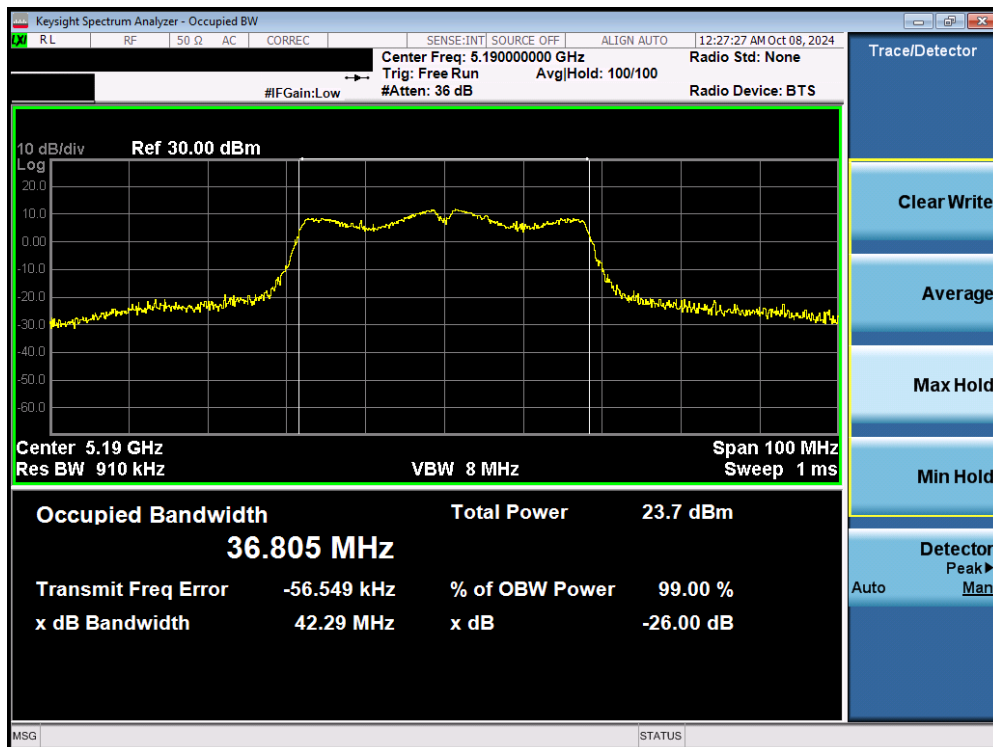


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 22 of 156

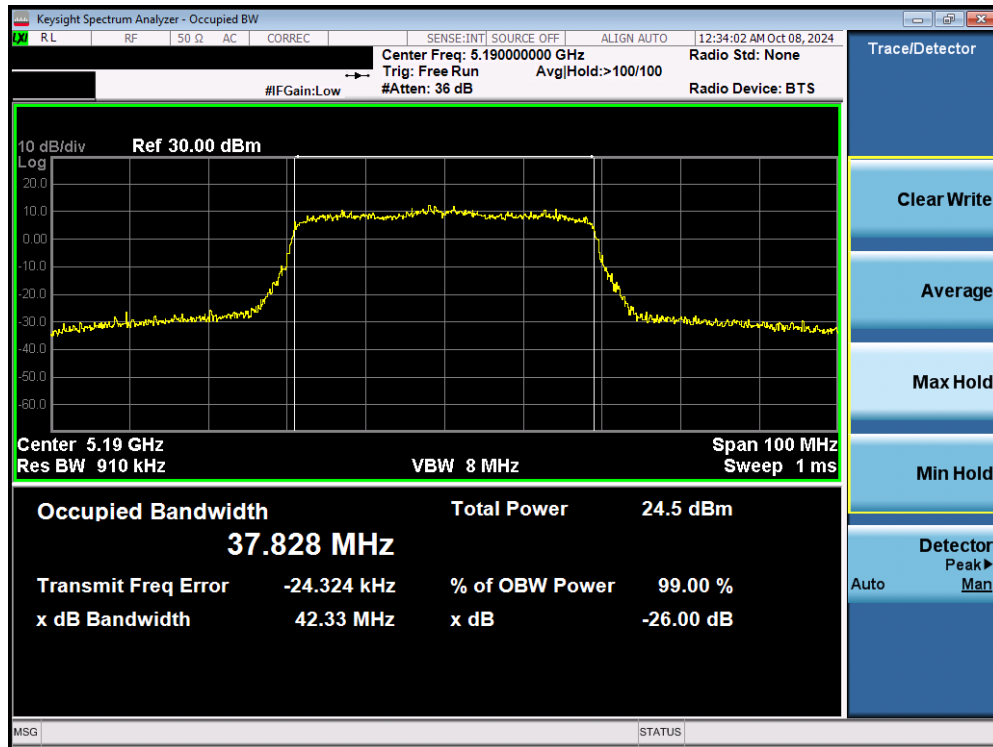


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 1) – Ch. 38)

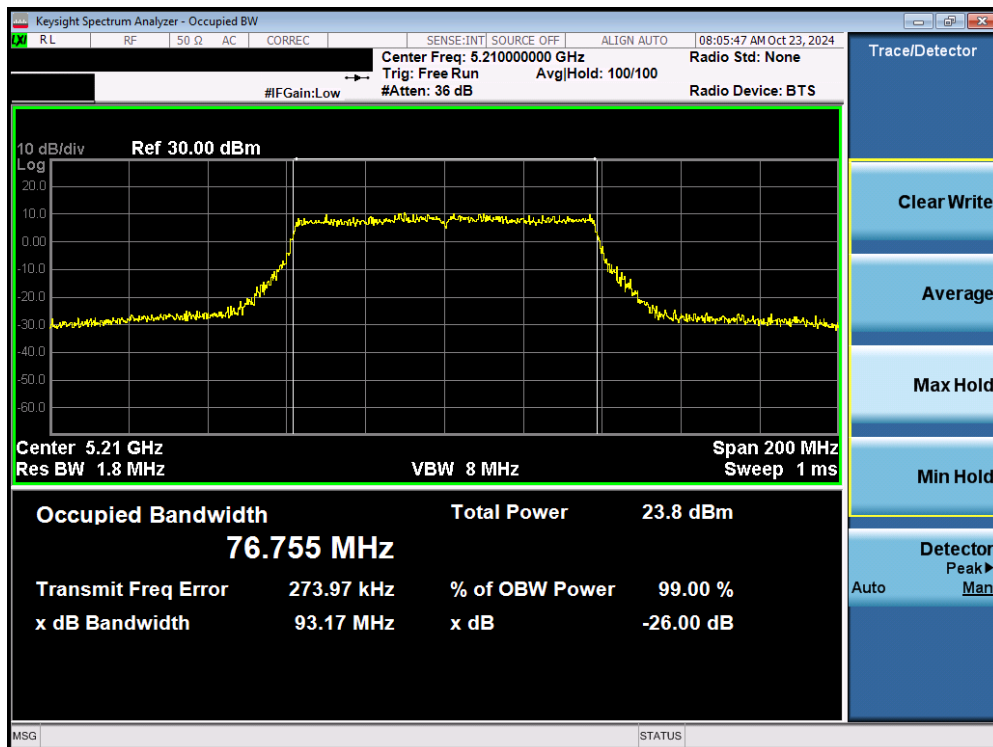


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 23 of 156

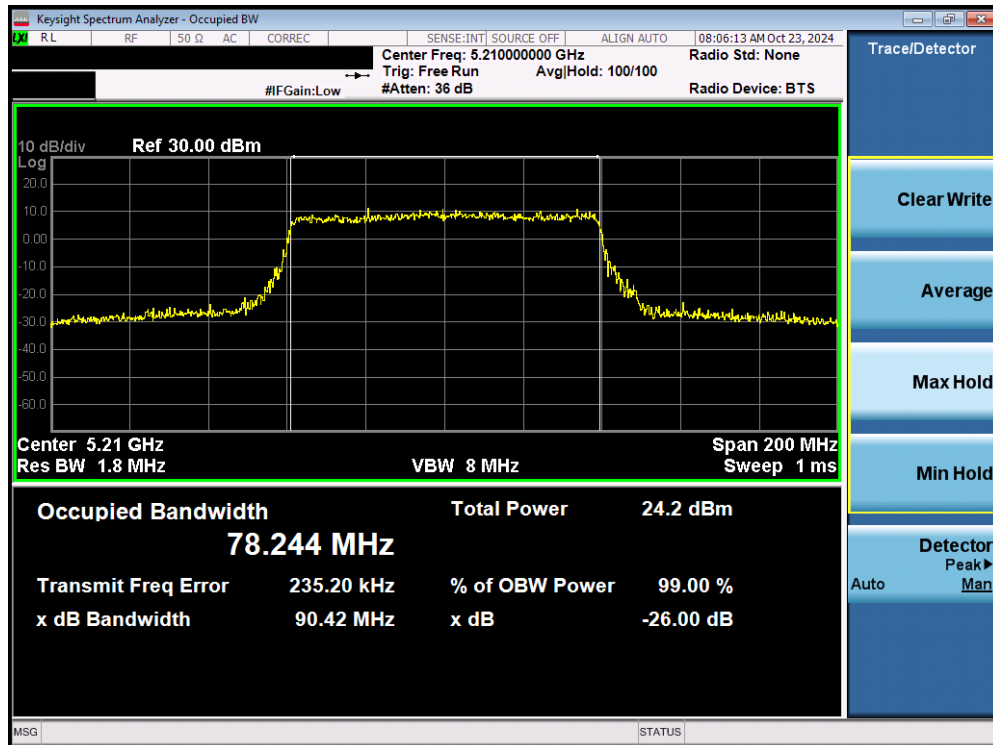


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 1) – Ch. 42)

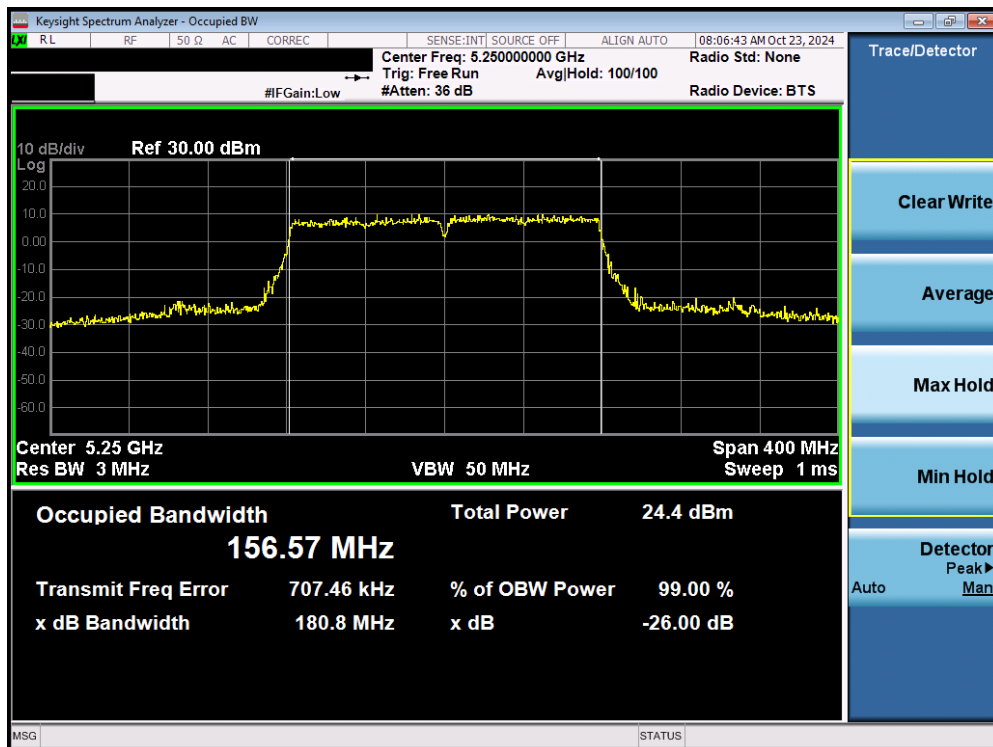


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ac (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 24 of 156

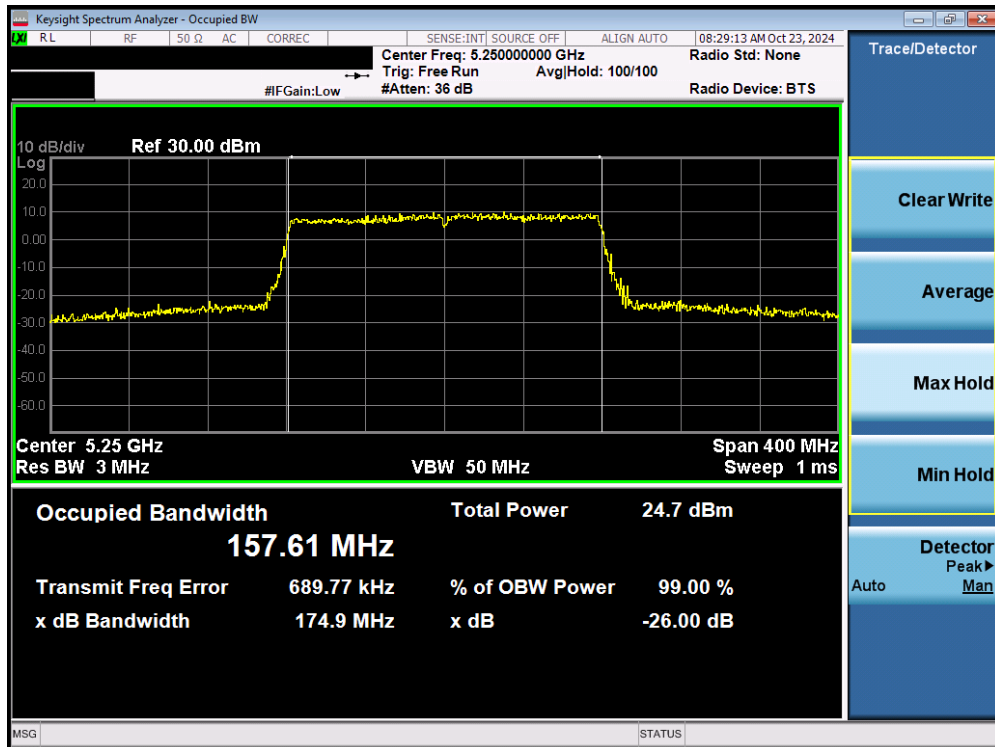


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (UNII Band 1/2A) – Ch. 50)

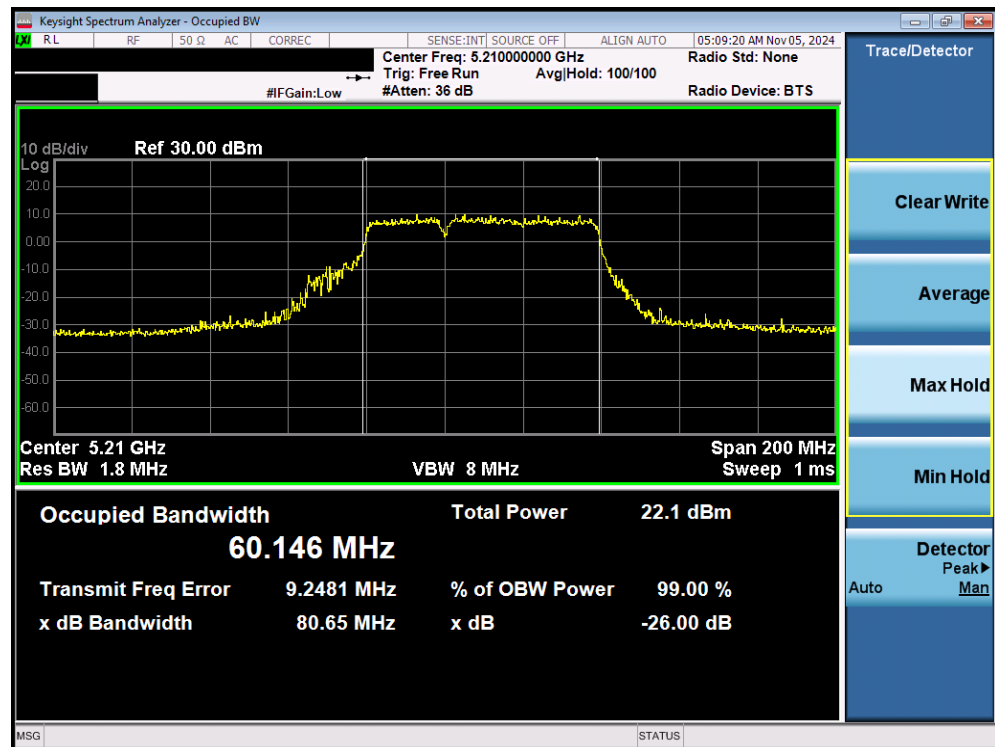

Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11be (20MHz Puncture) (UNII Band 1) – Ch. 42)


FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 25 of 156

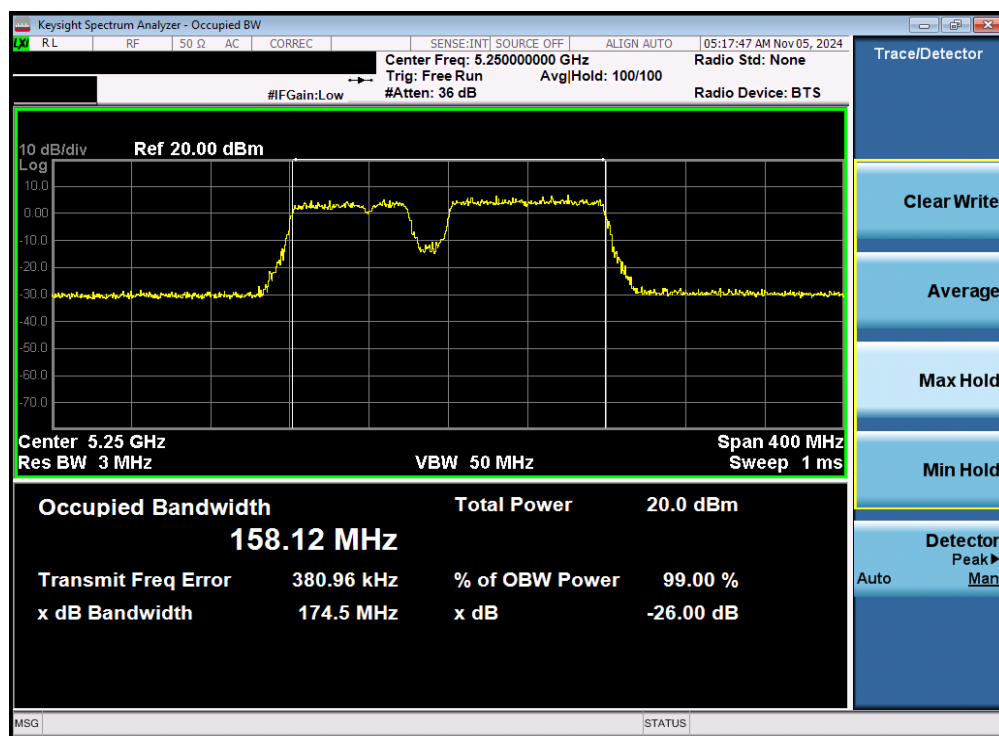


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11be (20MHz Puncture) (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 26 of 156

7.2.2 MIMO Antenna-2 26dB Bandwidth Measurements

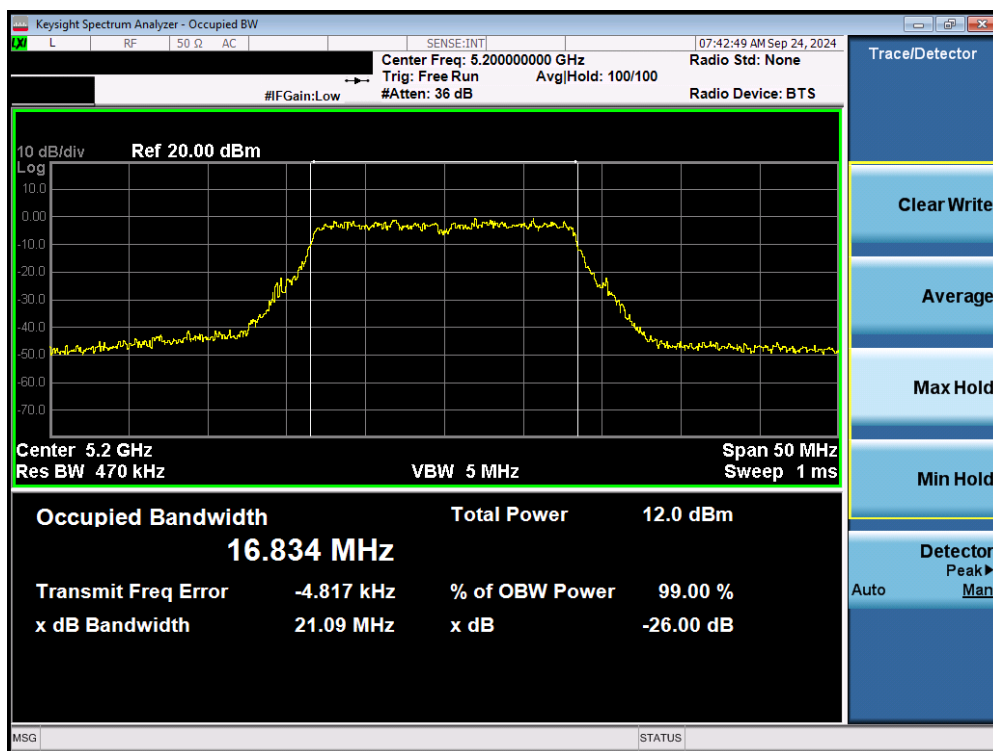


Plot 7-13. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 1) – Ch. 40)

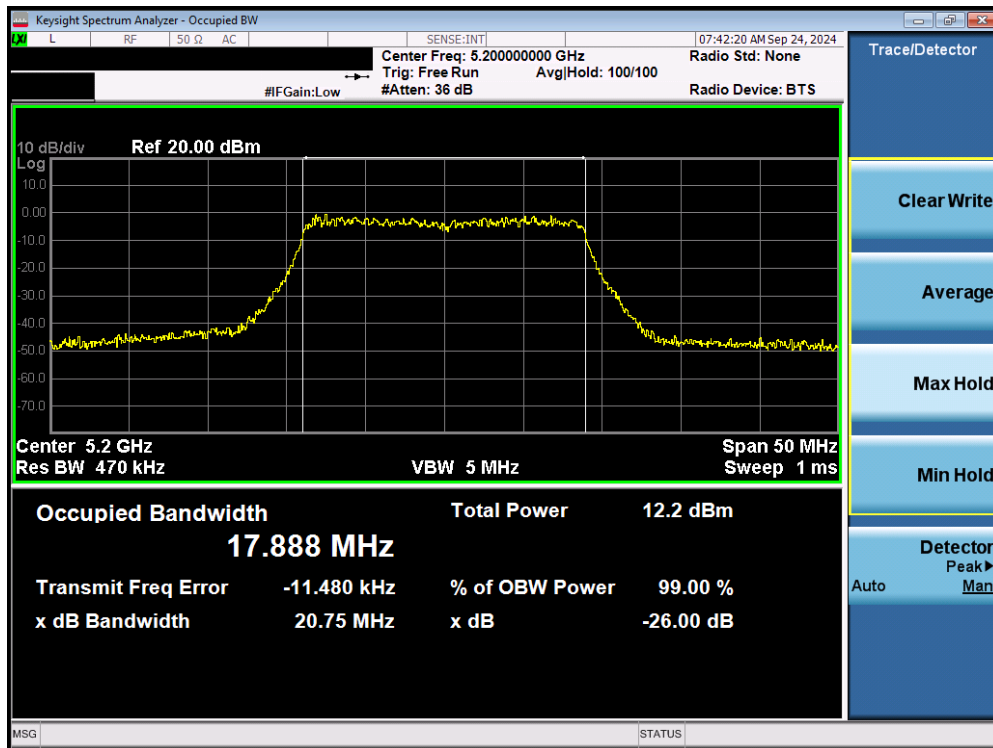


Plot 7-14. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11n (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 27 of 156

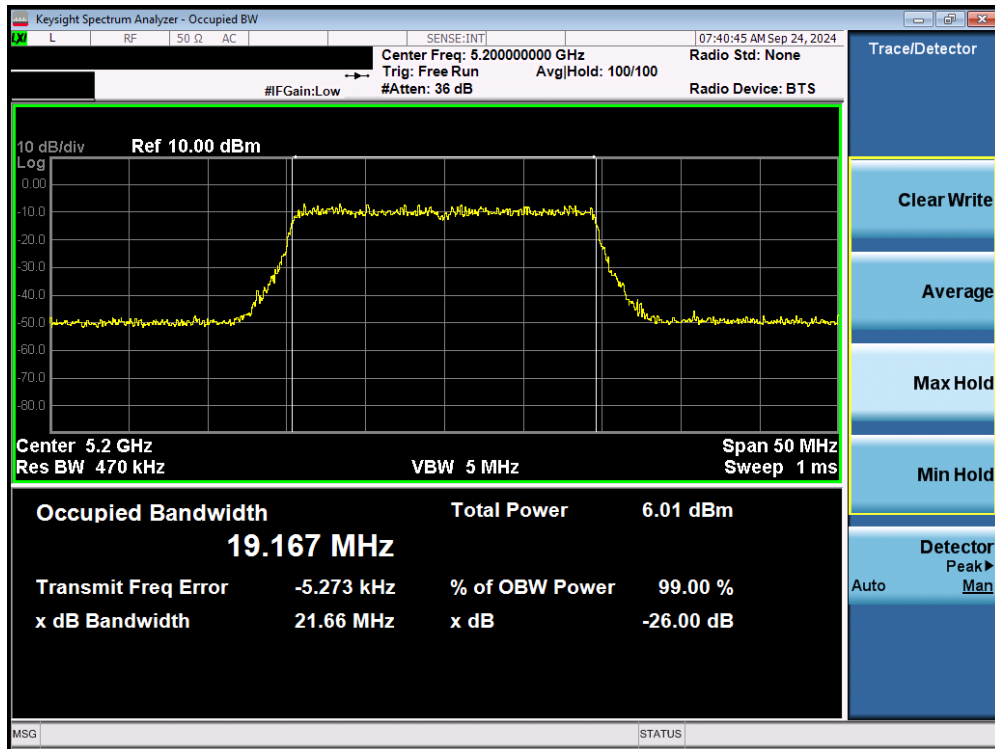


Plot 7-15. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 1) – Ch. 40)

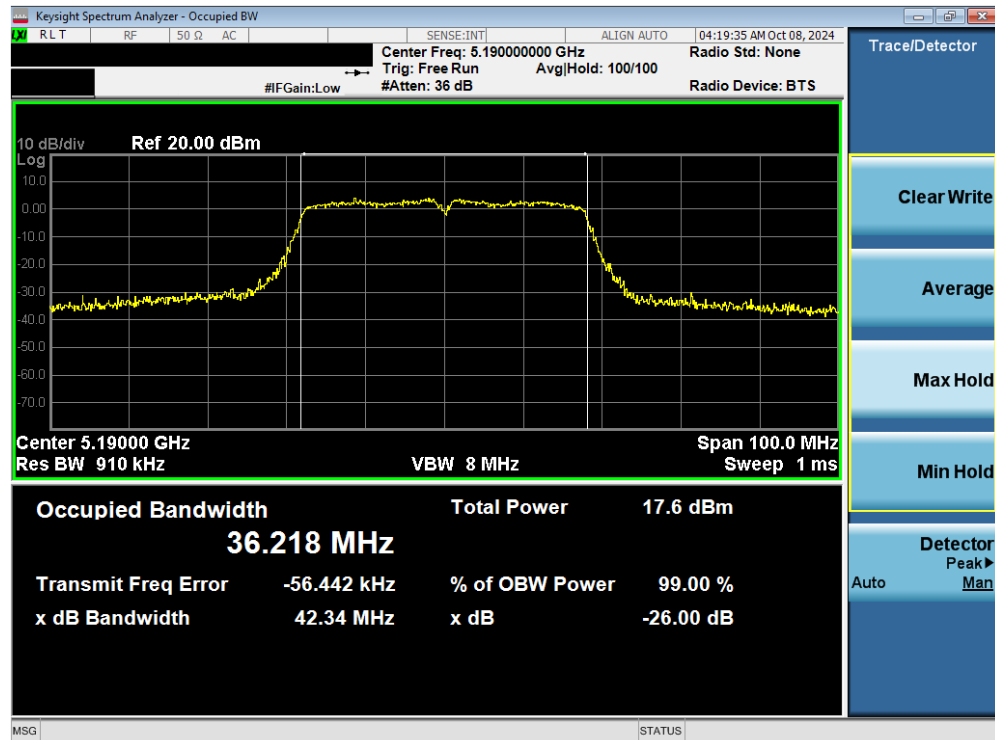


Plot 7-16. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 28 of 156

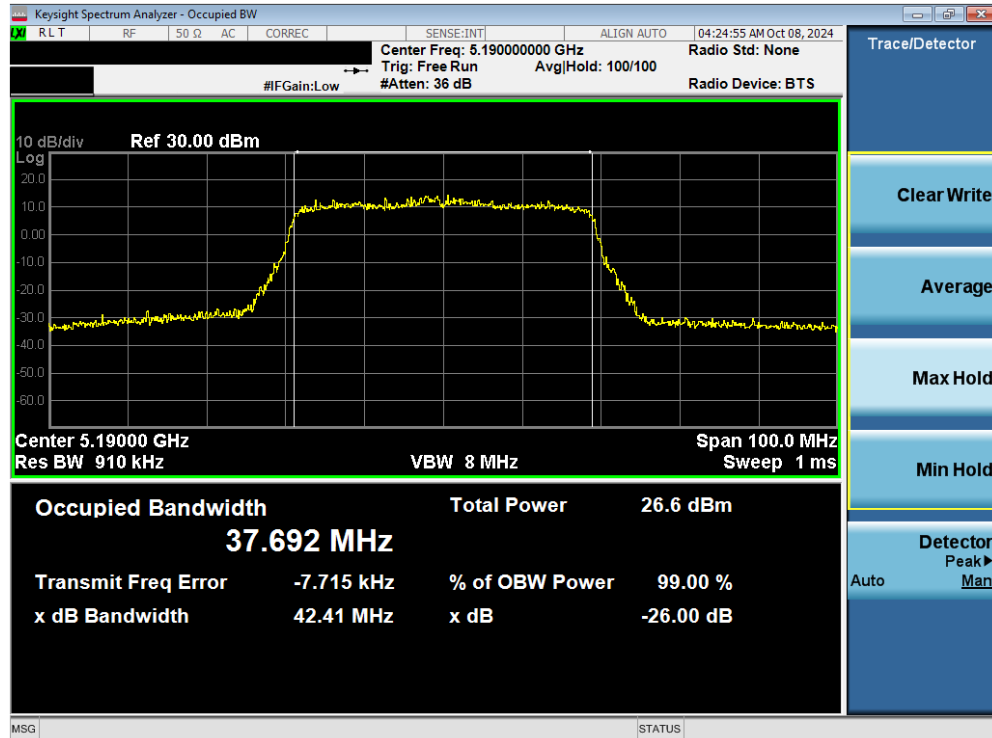


Plot 7-17. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 1) – Ch. 38)

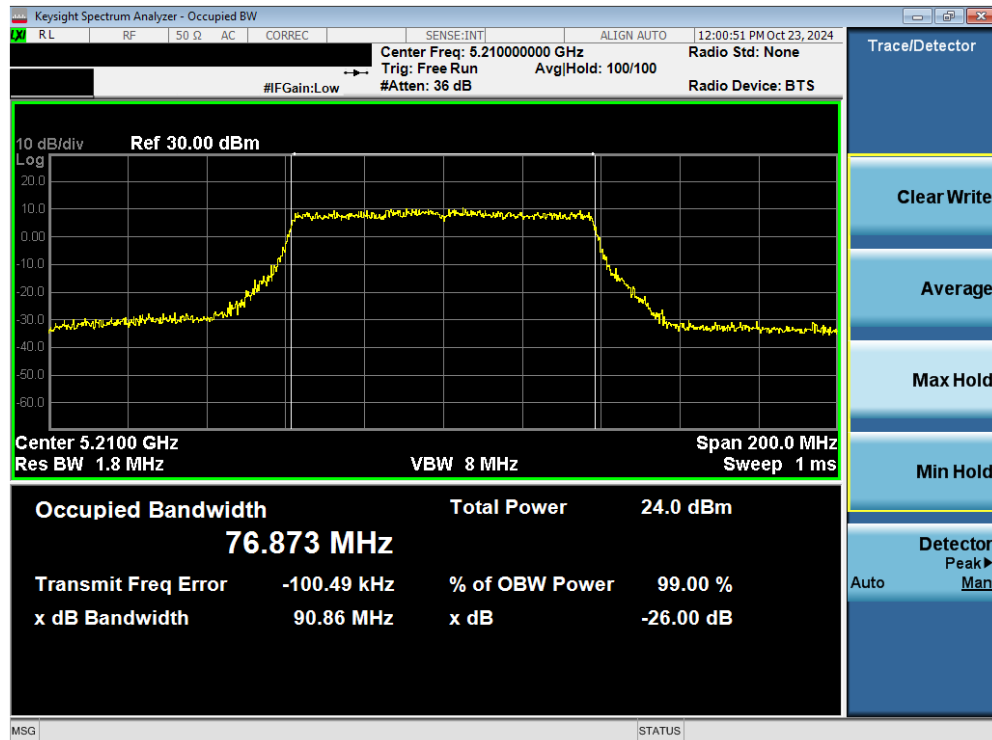


Plot 7-18. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 29 of 156

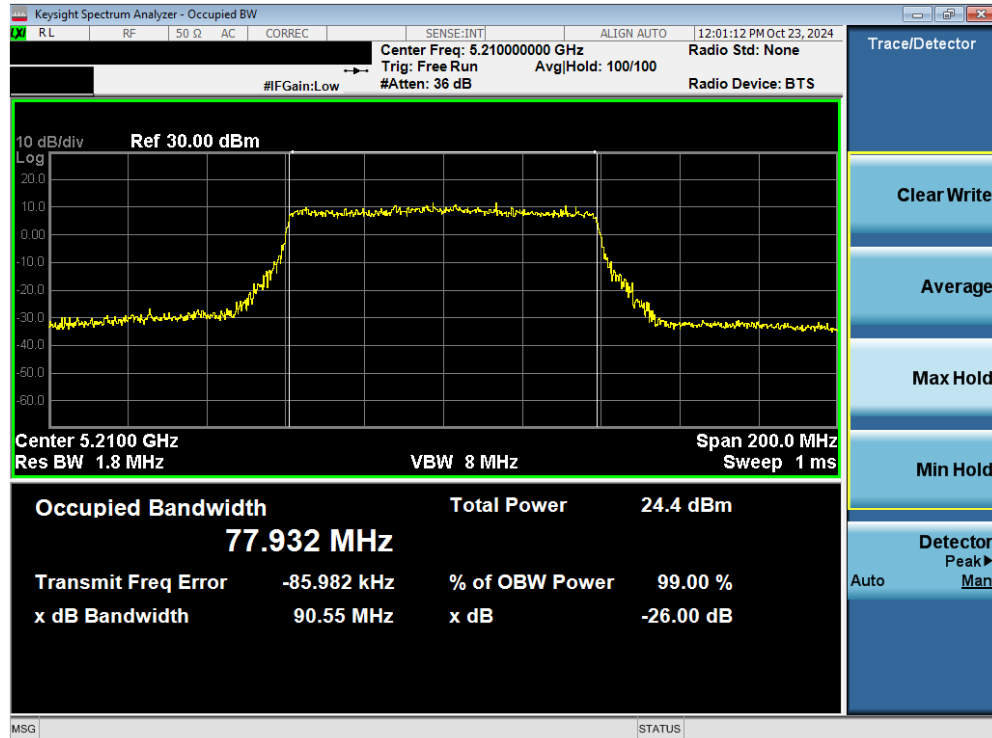


Plot 7-19. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 1) – Ch. 42)

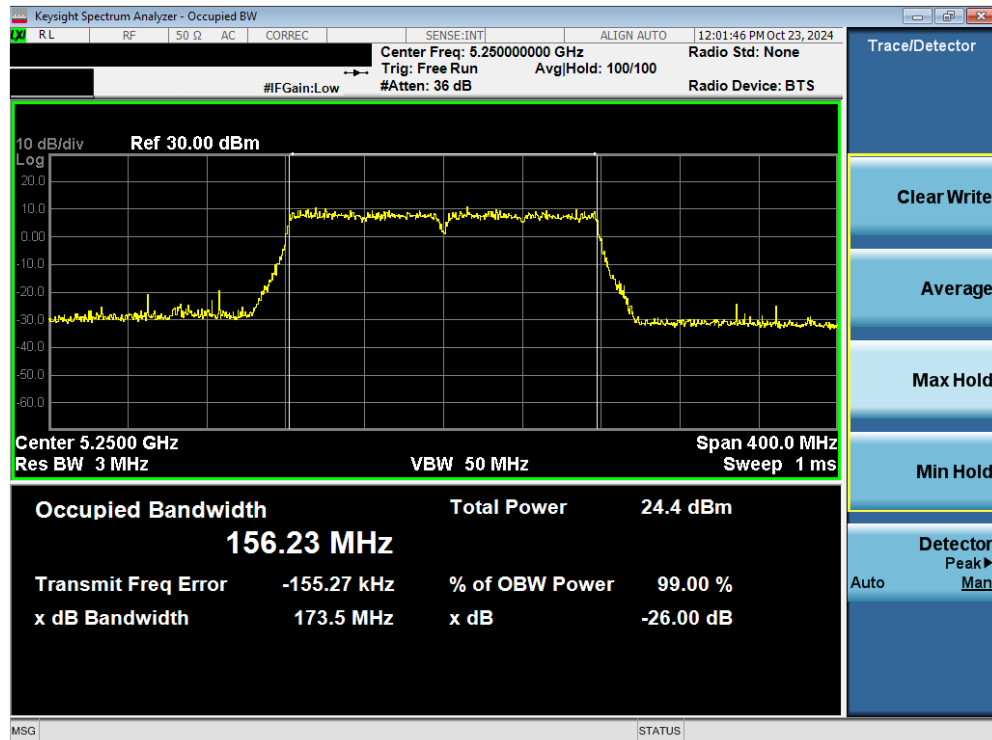


Plot 7-20. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ac (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 30 of 156

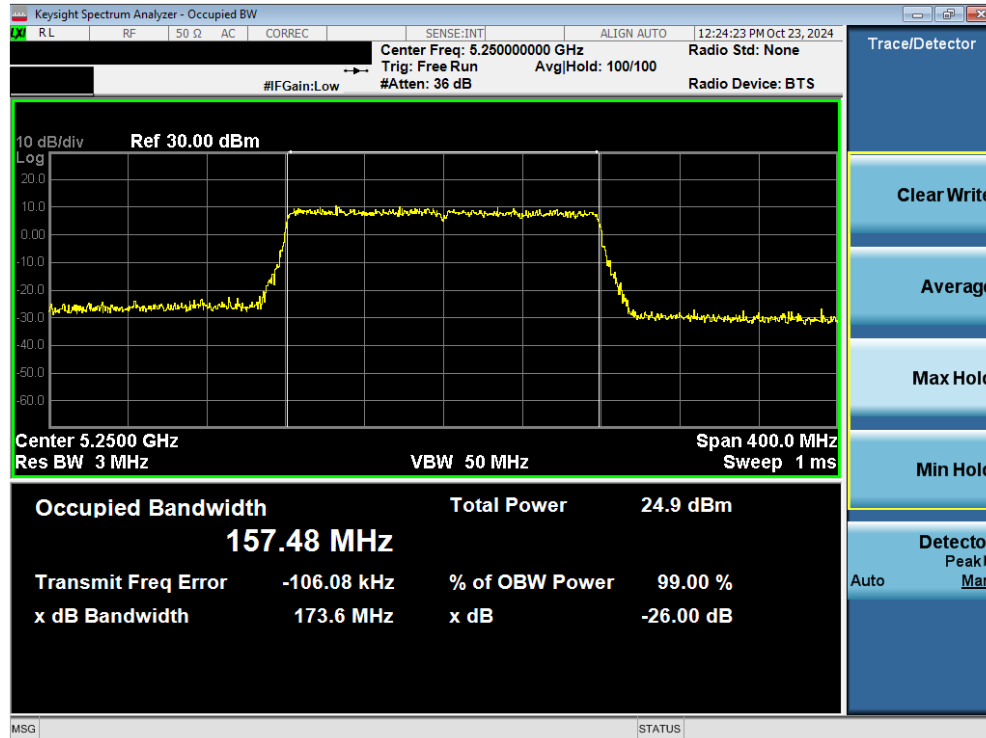


Plot 7-21. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (UNII Band 1/2A) – Ch. 50)

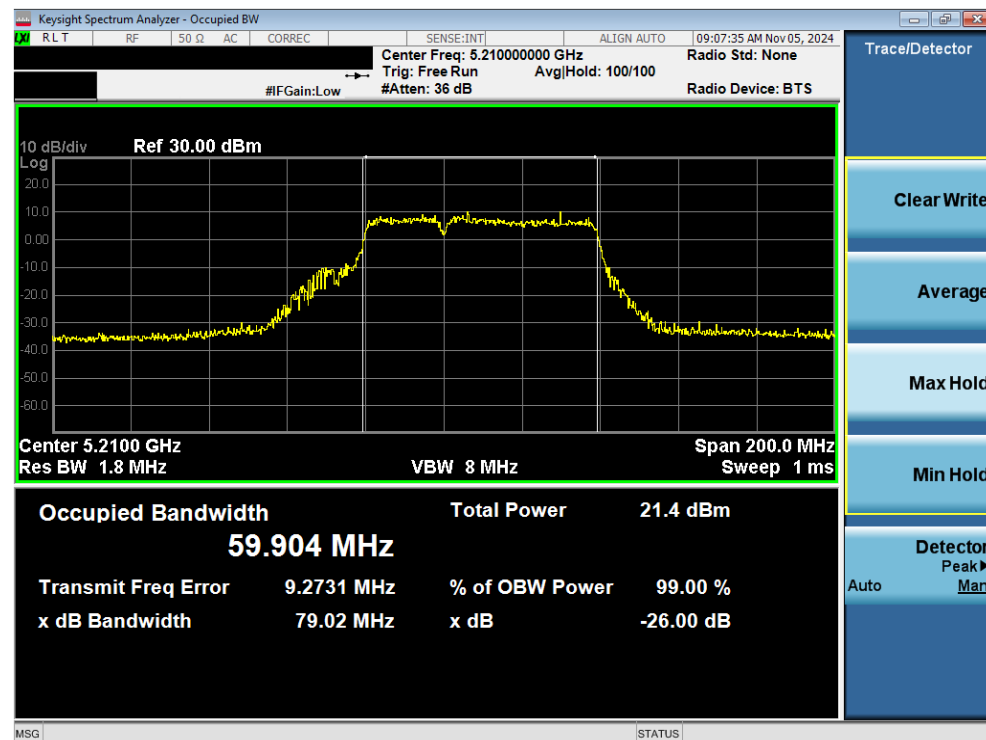

Plot 7-22. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11be (20MHz Puncture) (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 31 of 156

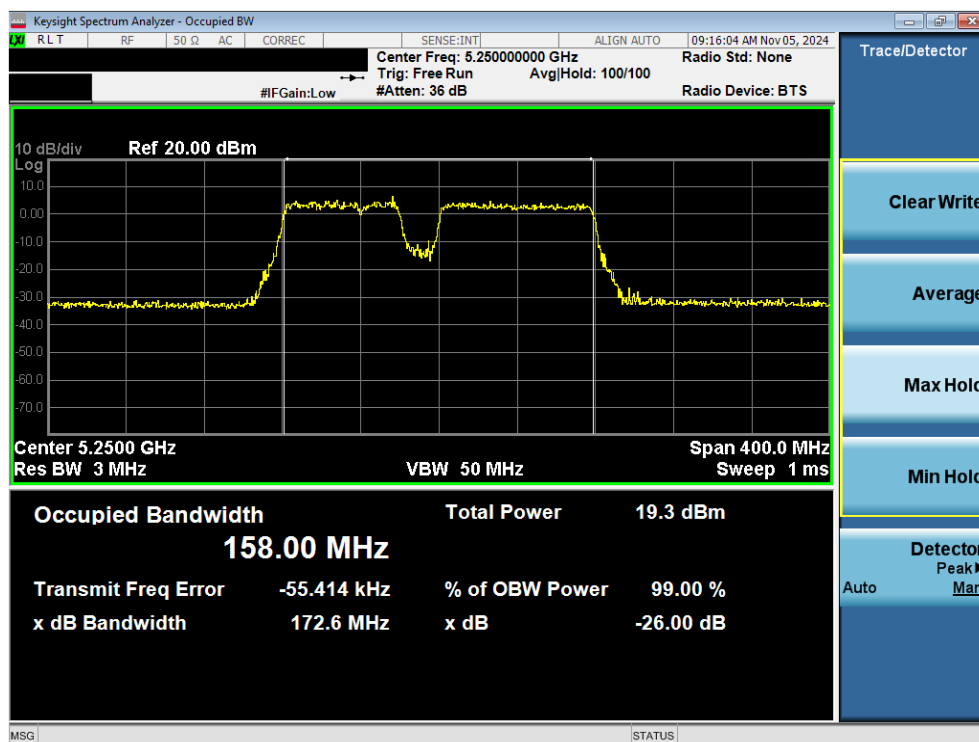

Plot 7-23. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11be (20MHz Puncture) (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 32 of 156

7.3 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band and 5.850 – 5.895GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. All cases were investigated; a subset of the plots is included to represent relevant settings and measurements.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 33 of 156

MIMO 6dB Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 6dB Bandwidth [MHz]	Antenna-2 6dB Bandwidth [MHz]
Band 3	5745	149	a	16.14	16.42
	5785	157	a	16.43	16.43
	5825	165	a	16.36	16.41
	5745	149	n	17.63	17.65
	5785	157	n	17.62	17.63
	5825	165	n	17.58	17.64
	5745	149	be SU	19.02	19.03
	5785	157	be SU	18.96	18.97
	5825	165	be SU	18.87	18.99
	5755	151	n	33.57	35.19
	5795	159	n	35.22	35.44
	5755	151	be SU	35.27	36.05
	5795	159	be SU	37.58	37.69
	5775	155	ac	75.25	76.44
	5775	155	be SU	77.47	78.14

Table 7-7. Band 3 Conducted 6dB Bandwidth Measurements MIMO

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 34 of 156

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 6dB Bandwidth [MHz]	Antenna-2 6dB Bandwidth [MHz]
Band 3/4	5845	169	a	16.42	16.42
Band 4	5865	173	a	16.36	16.43
	5885	177	a	16.40	16.41
Band 3/4	5845	169	n	16.97	17.64
Band 4	5865	173	n	17.60	17.65
	5885	177	n	17.63	17.60
Band 3/4	5845	169	be SU	19.11	19.14
Band 4	5865	173	be SU	18.97	19.03
	5885	177	be SU	19.07	19.15
Band 3/4	5835	167	n	35.20	35.44
Band 4	5875	175	n	35.19	35.49
Band 3/4	5835	167	be SU	35.29	35.15
Band 4	5875	175	be SU	36.34	37.73
Band 3/4	5855	171	ac	75.55	76.27
	5855	171	be SU	77.29	77.94
	5815	163	ac	156.03	156.38
	5815	163	be SU	158.32	158.06


Table 7-8. Bands 3/4 Conducted 6dB Bandwidth Measurements MIMO

	Frequency [MHz]	Channel	802.11 MODE	Puncture Size [MHz]	Antenna-1 6dB Bandwidth [MHz]	Antenna-2 6dB Bandwidth [MHz]
Band 3	5775	155	be	20	58.52	58.84
Band 3/4	5855	171	be	20	58.80	58.72
	5815	163	be	20	138.50	139.20


Table 7-9. Bands 3/4 Conducted 6dB Bandwidth Measurements MIMO – Punctured Cases

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 35 of 156

7.3.1 MIMO Antenna-1 6dB Bandwidth Measurements

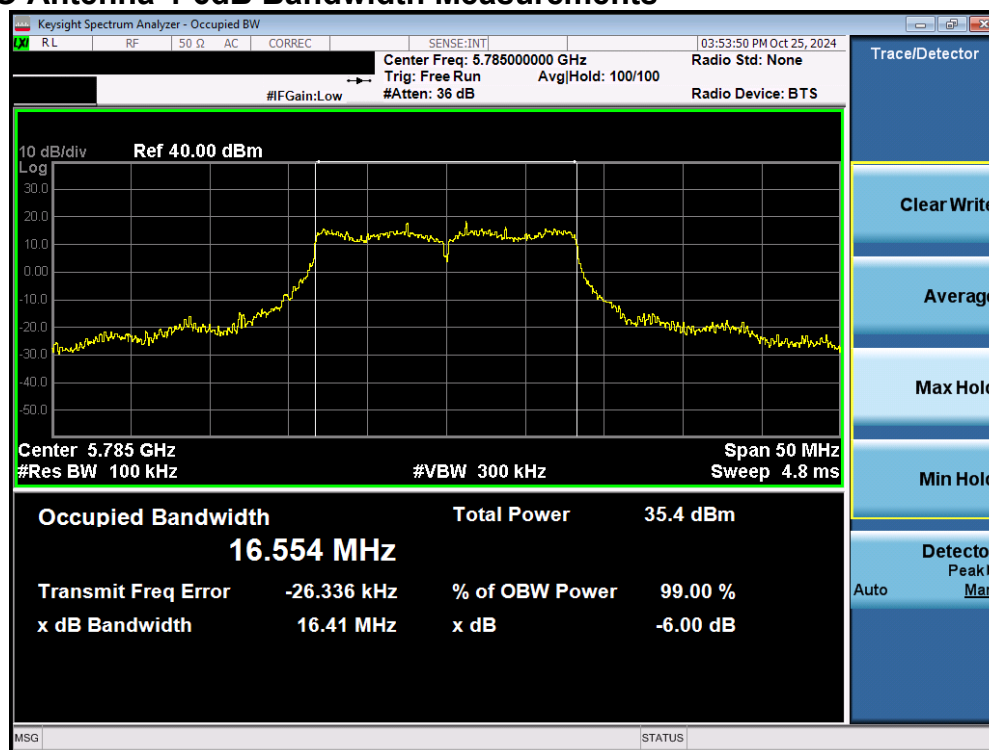


Plot 7-24. 6dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 3) – Ch.157)

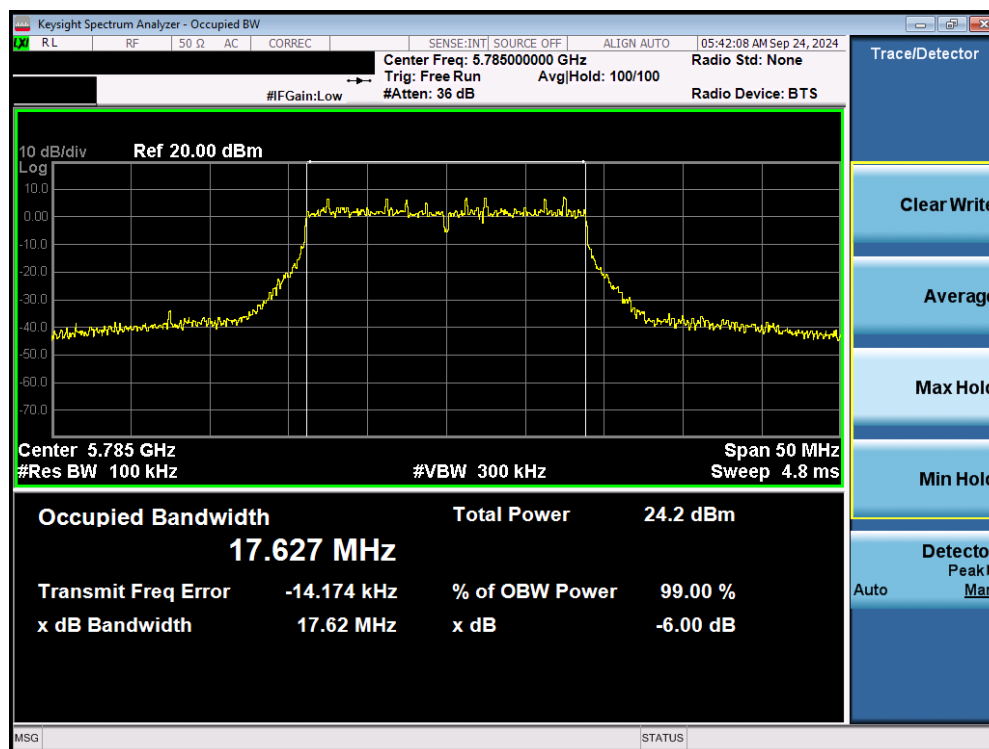


Plot 7-25. 6dB Bandwidth Plot MIMO ANT1 (20MHz 802.11n (UNII Band 3) – Ch.157)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 36 of 156

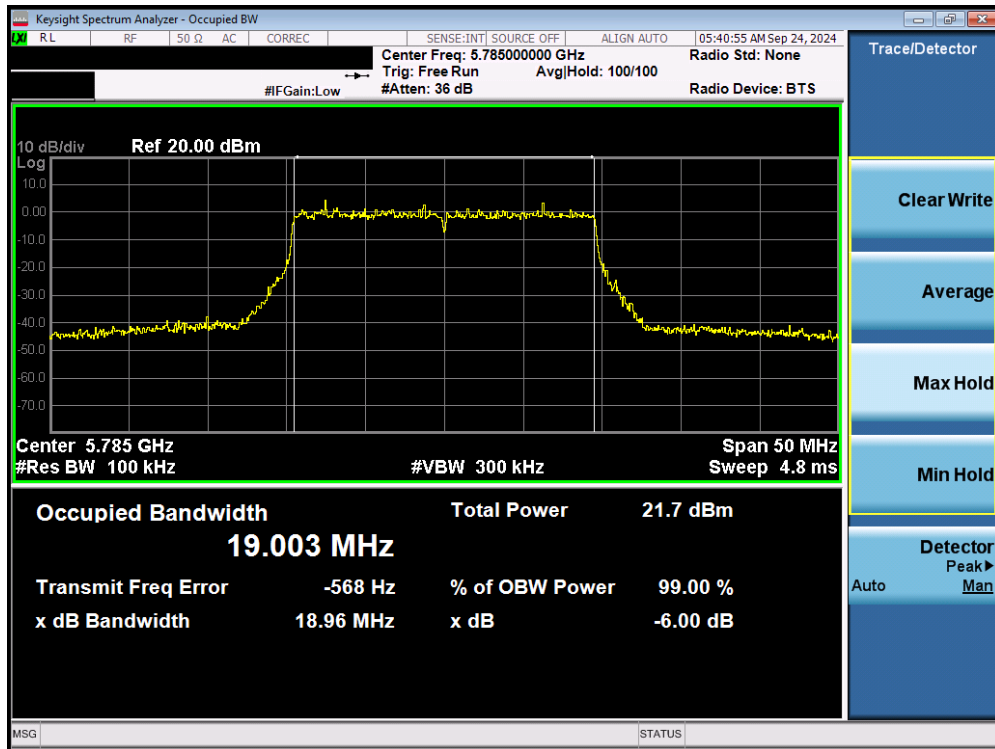


Plot 7-26. 6dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 3) – Ch.157)

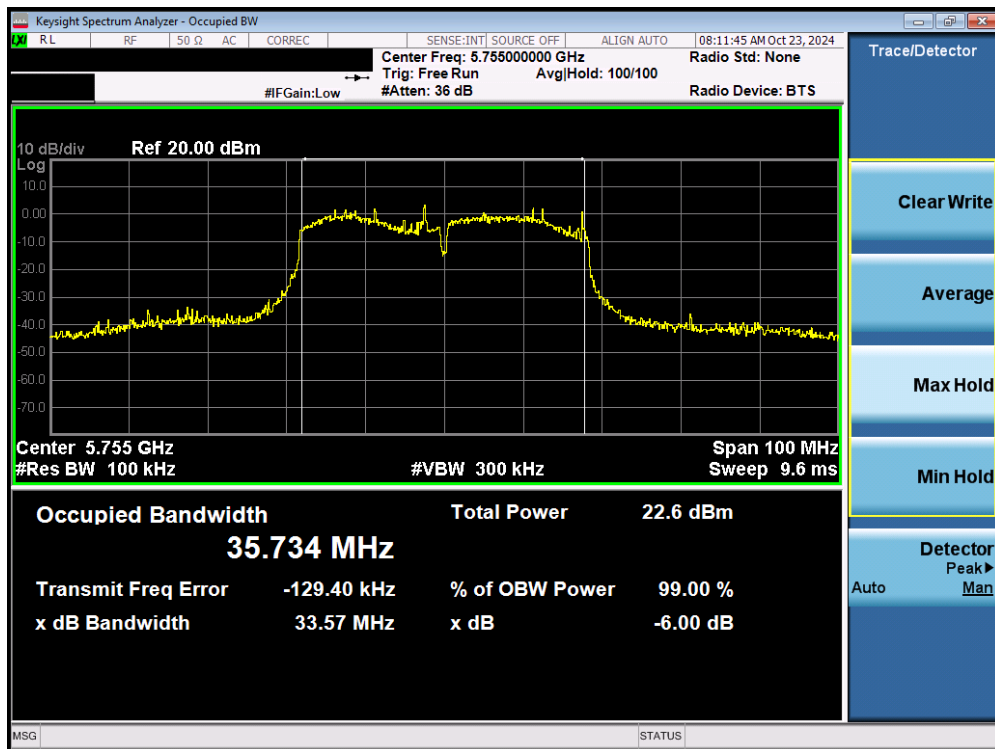


Plot 7-27. 6dB Bandwidth Plot MIMO ANT1 (40MHz 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 37 of 156

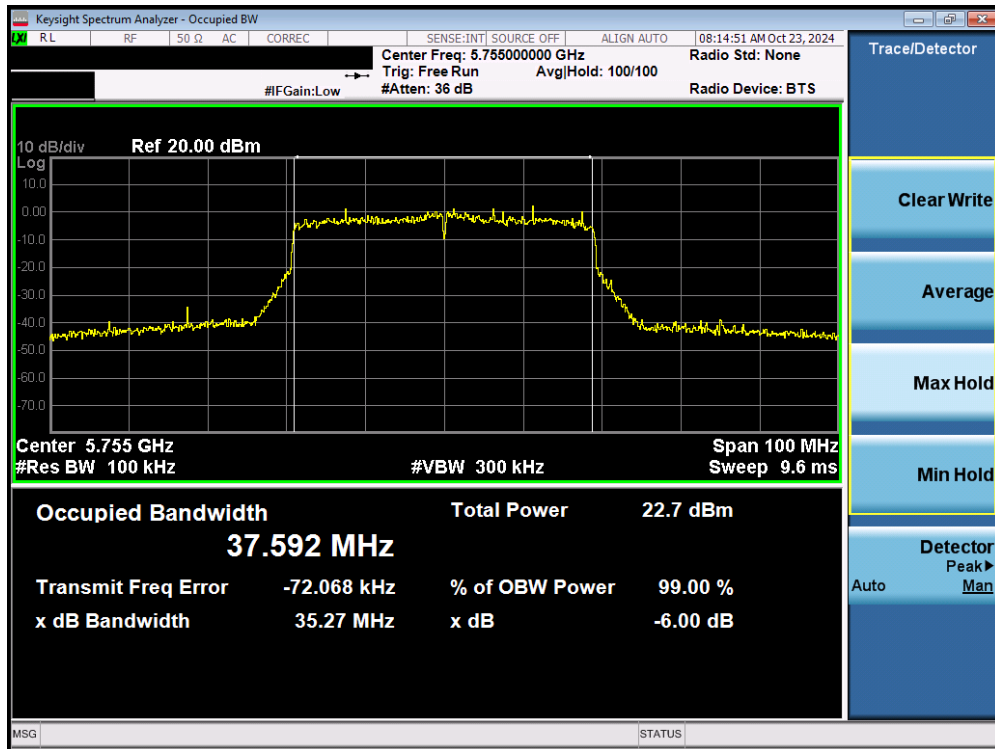


Plot 7-28. 6dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 3) – Ch. 151)

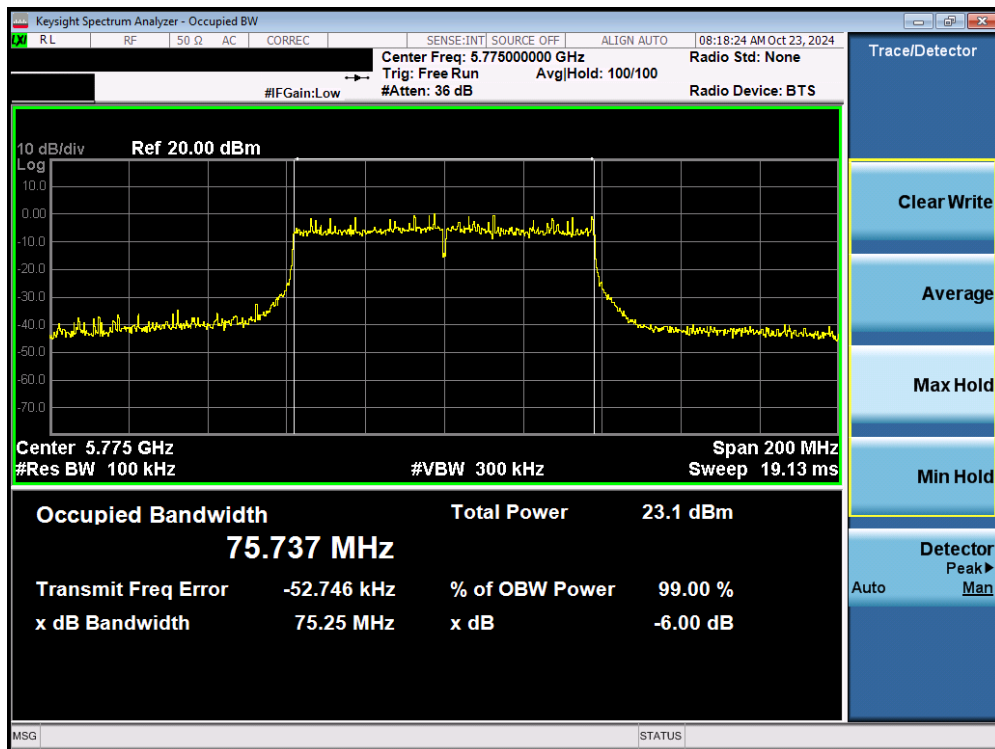


Plot 7-29. 6dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 38 of 156

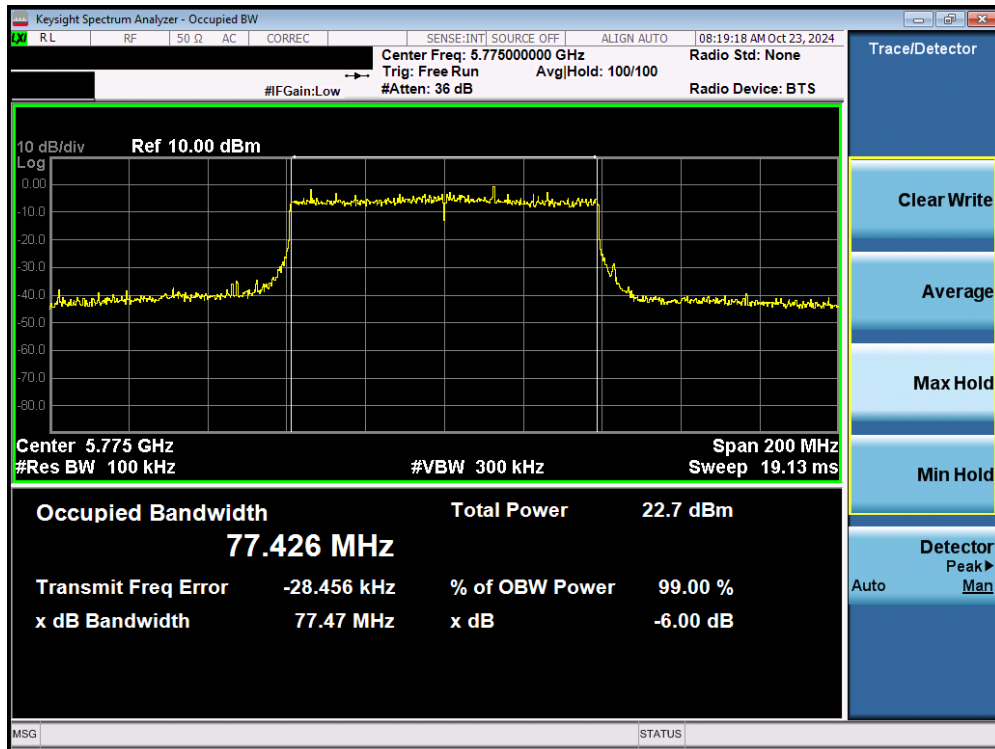


Plot 7-30. 6dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 3) – Ch. 155)

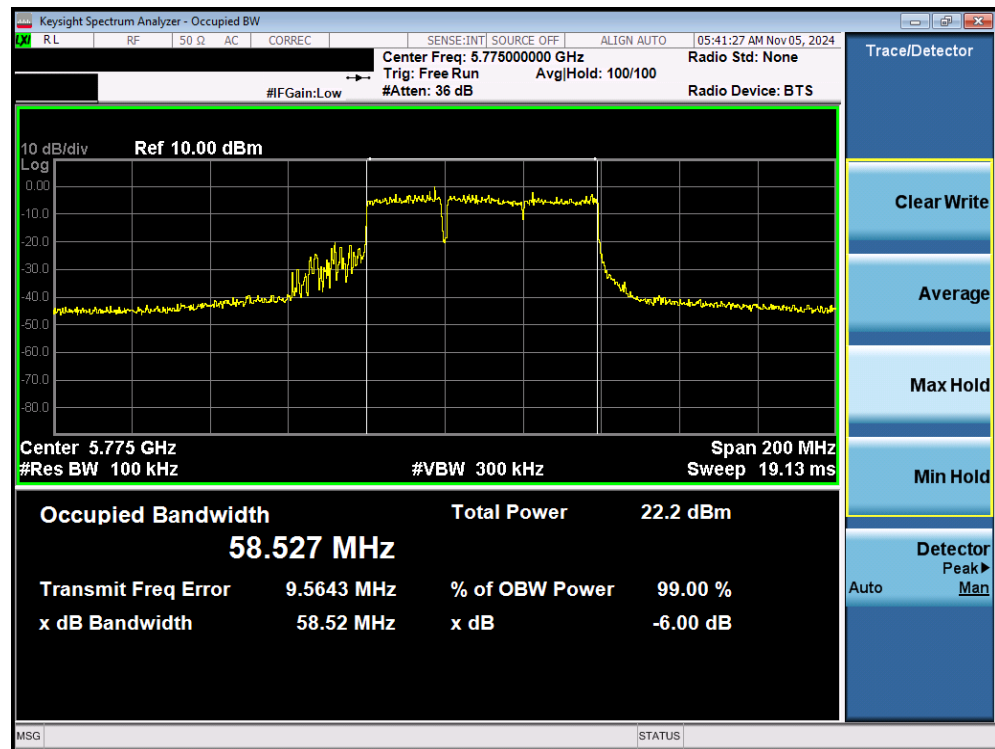


Plot 7-31. 6dB Bandwidth Plot MIMO ANT1 (80MHz 802.11be (20MHz Puncture) (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 39 of 156

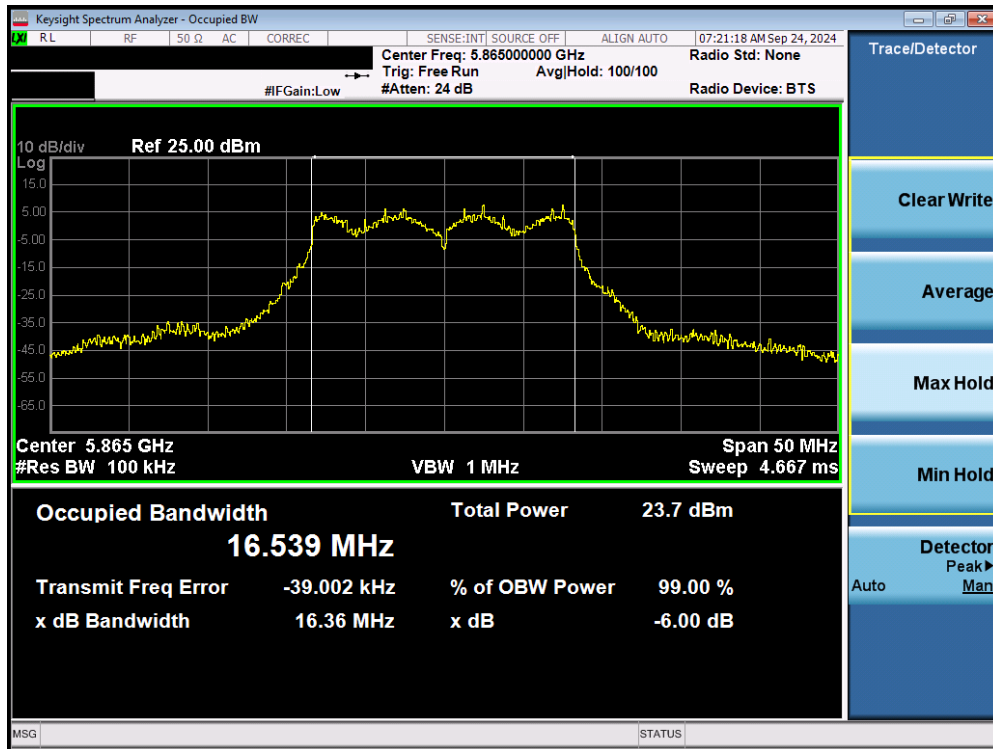


Plot 7-32. 6dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 4) – Ch.173)

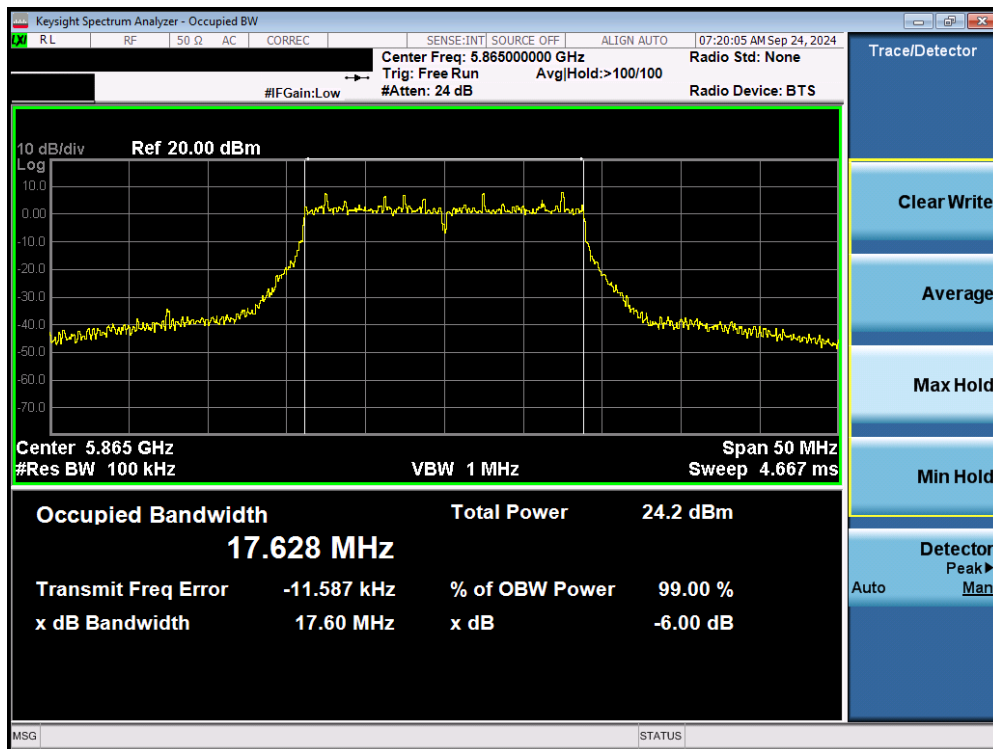


Plot 7-33. 6dB Bandwidth Plot MIMO ANT1 (20MHz 802.11n (UNII Band 4) – Ch.173)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 40 of 156

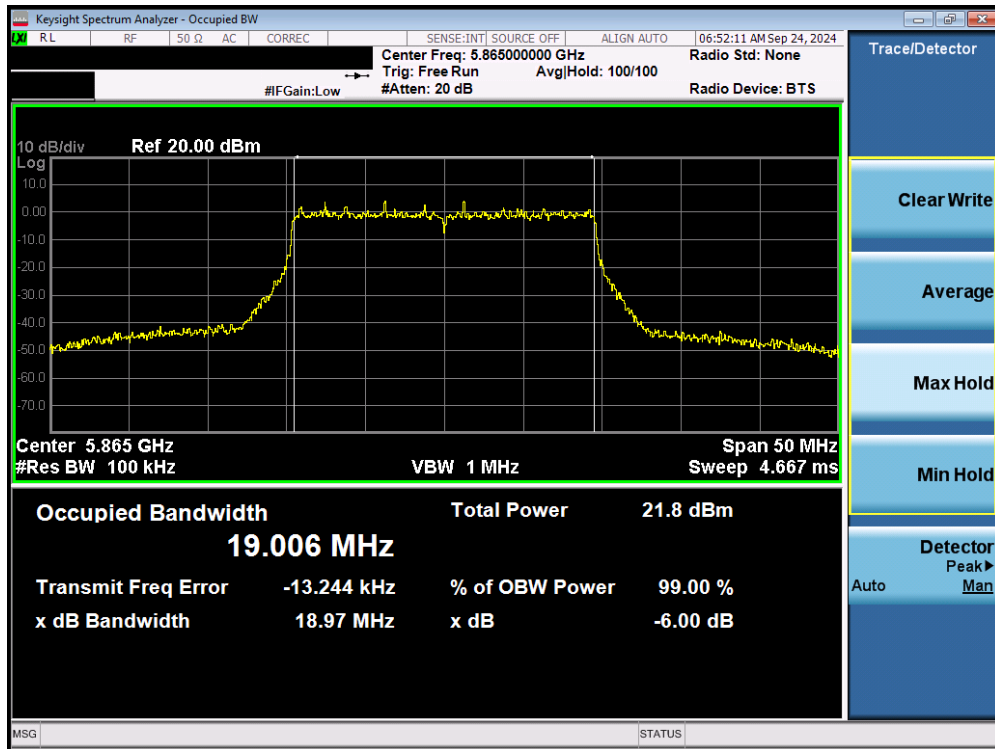


Plot 7-34. 6dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 4) – Ch.173)

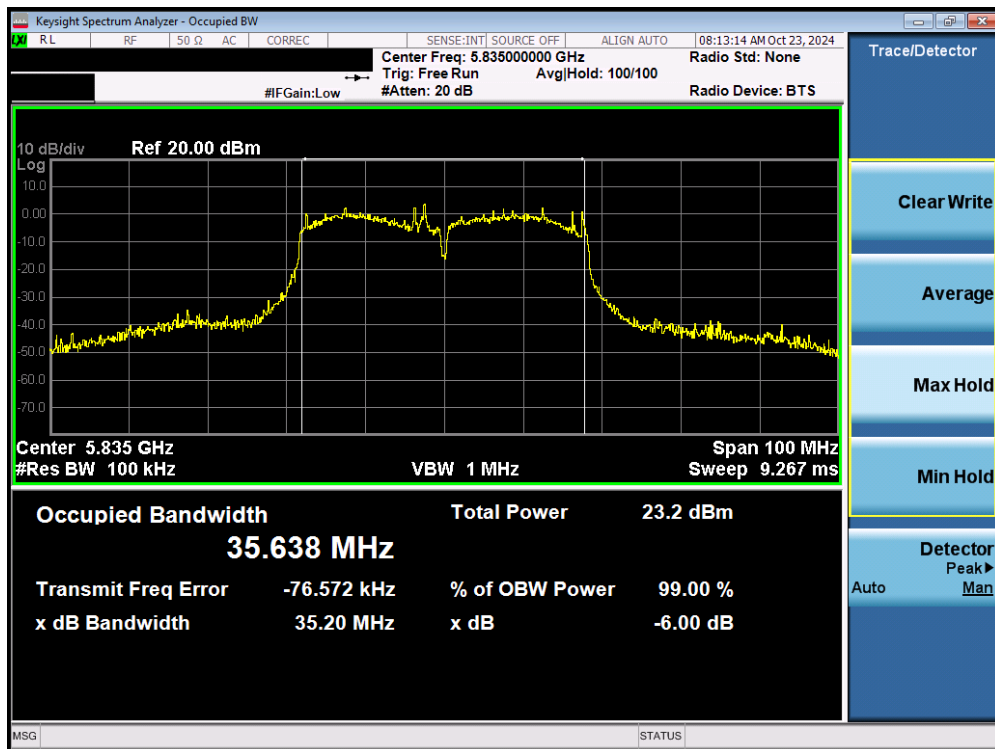


Plot 7-35. 6dB Bandwidth Plot MIMO ANT1 (40MHz 802.11n (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 41 of 156

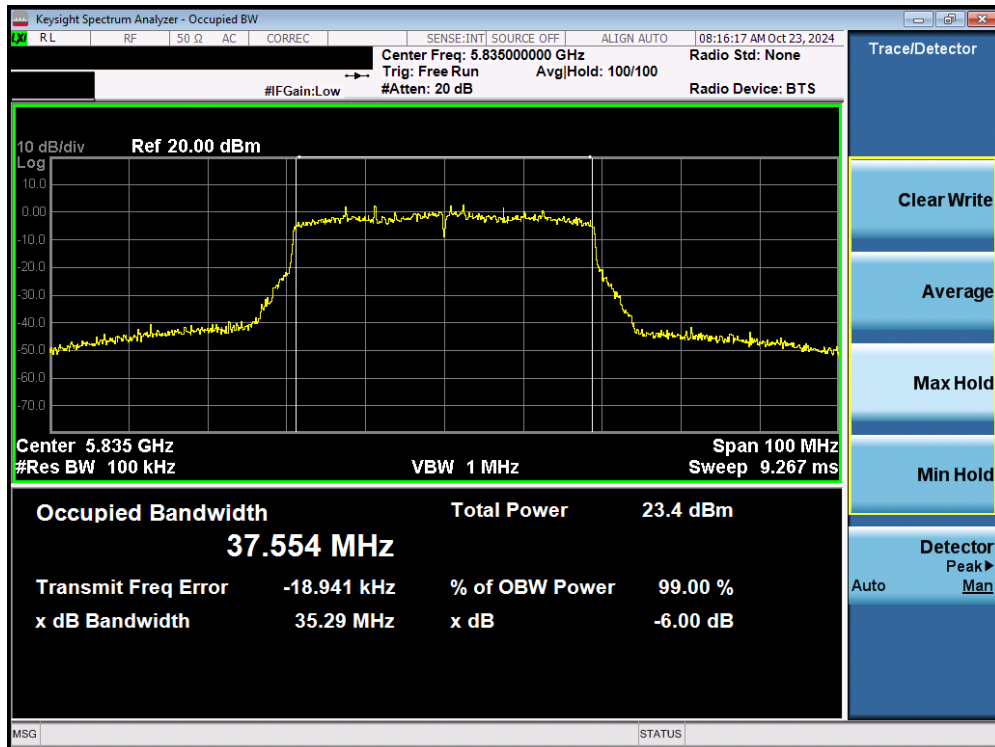


Plot 7-36. 6dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 3/4) – Ch. 167)

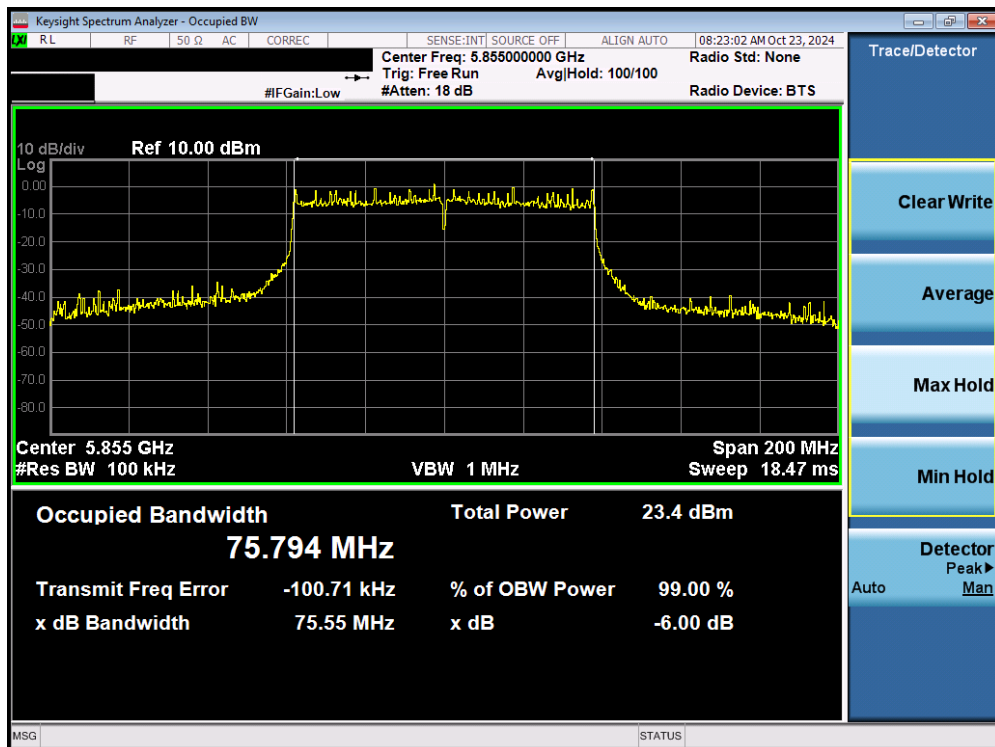


Plot 7-37. 6dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ac (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 42 of 156

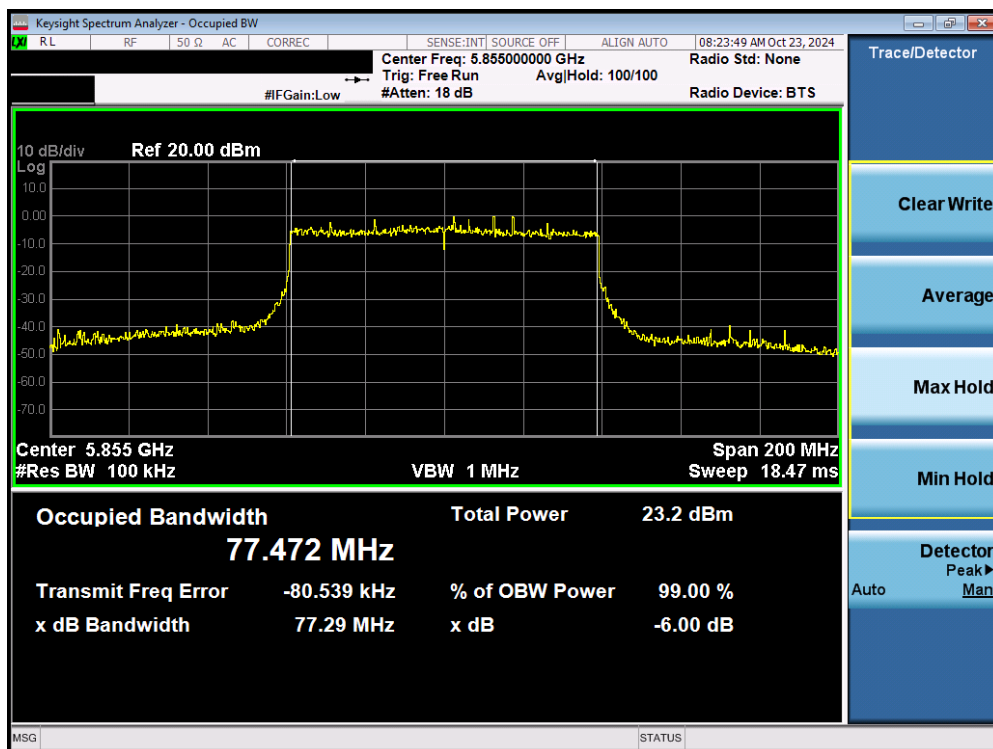


Plot 7-38. 6dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (UNII Band 3/4) – Ch. 171)

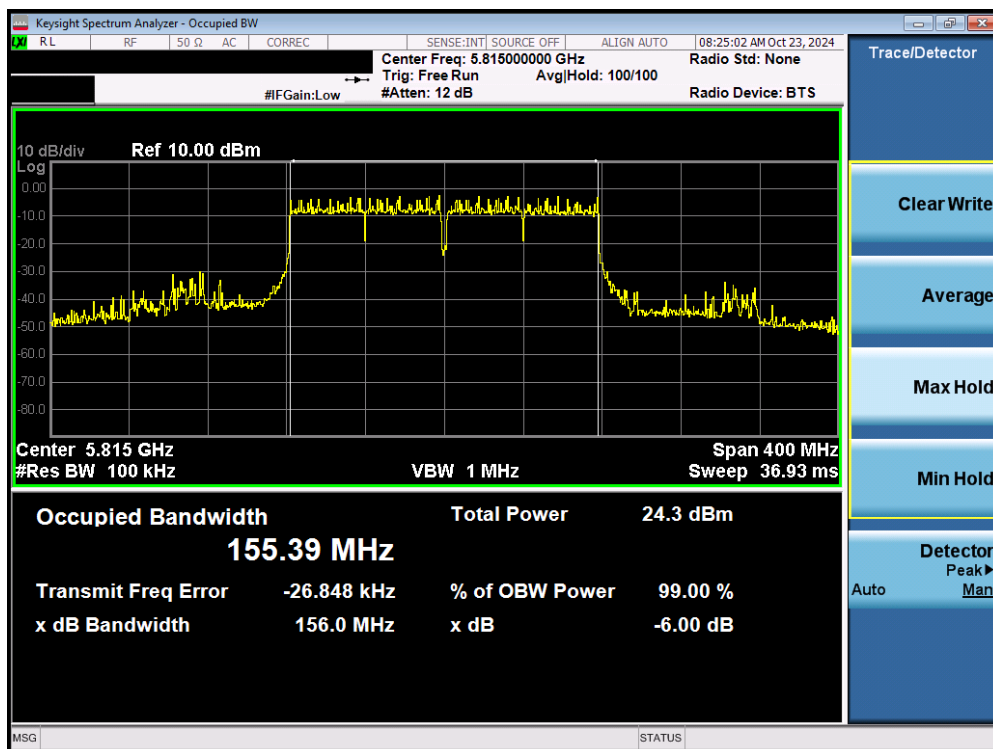


Plot 7-39. 6dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ac (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 43 of 156

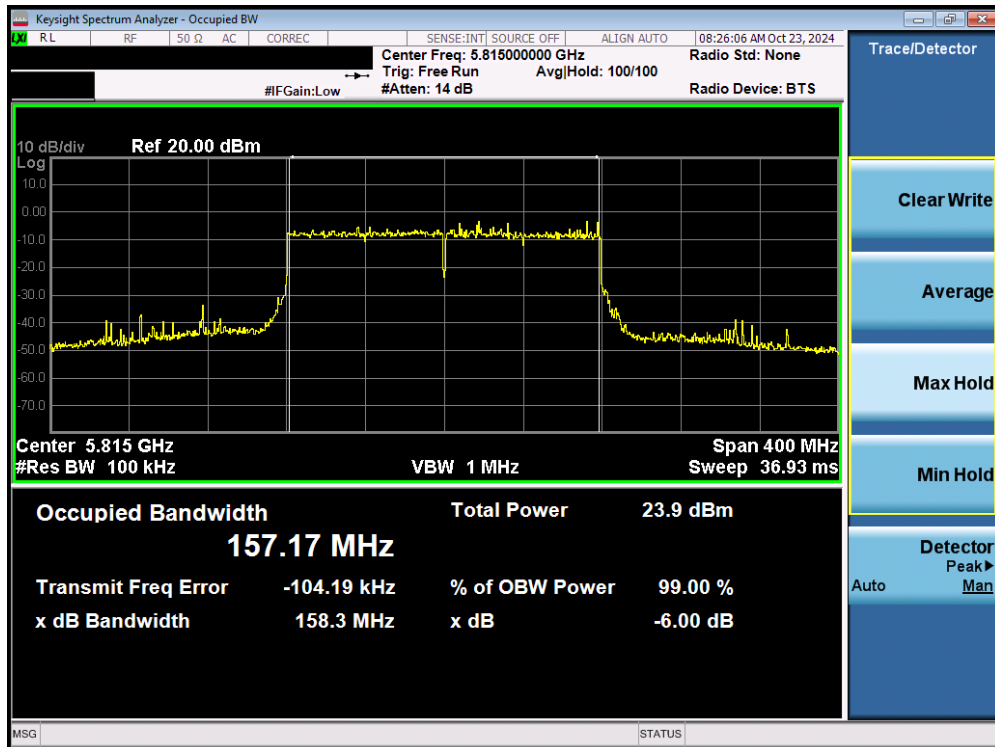


Plot 7-40. 6dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (UNII Band 3/4) – Ch. 163)

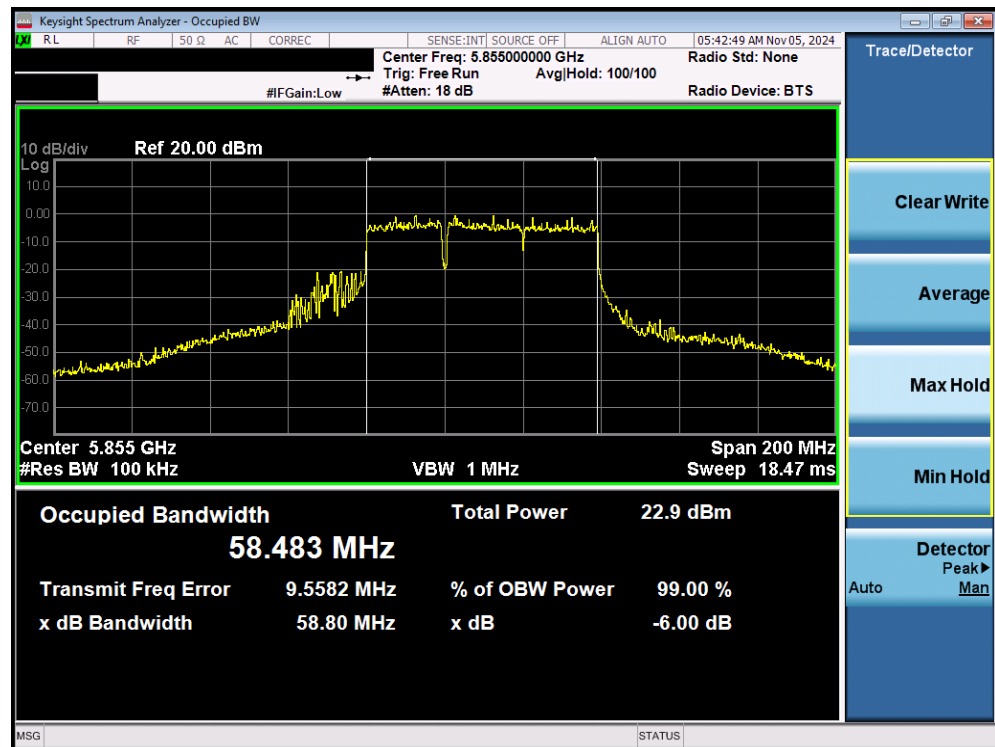

Plot 7-41. 6dB Bandwidth Plot MIMO ANT1 (80MHz 802.11be (20MHz Puncture) (UNII Band 3/4) – Ch. 171)


FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 44 of 156

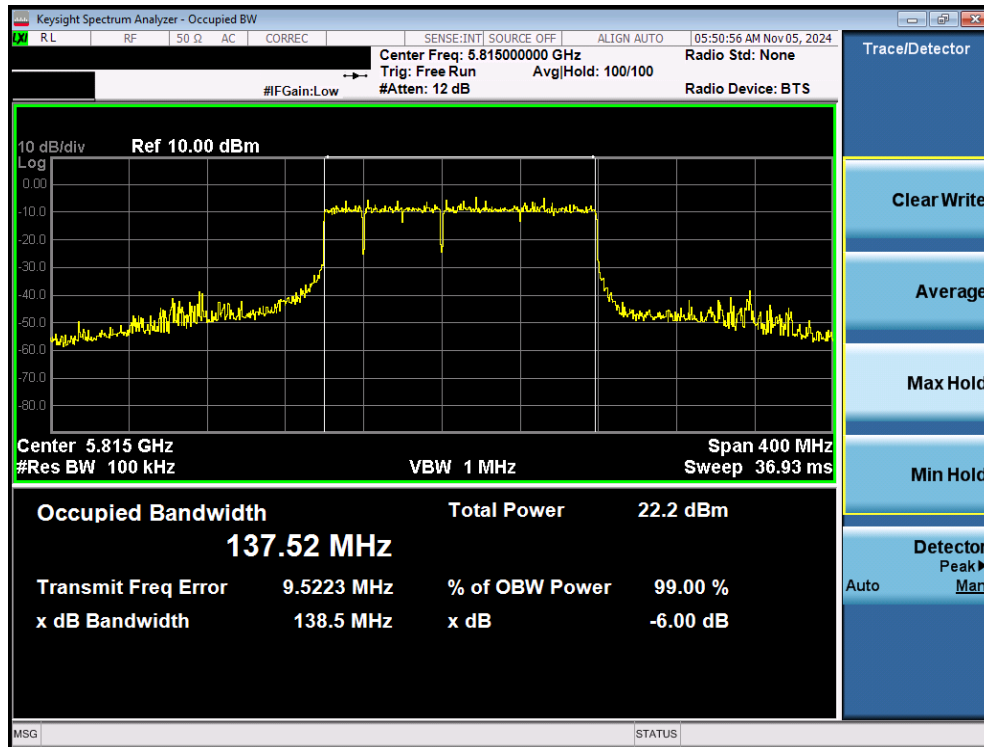


Plot 7-42. 6dB Bandwidth Plot MIMO ANT1 (160MHz 802.11be (20MHz Puncture) (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 45 of 156

7.3.2 MIMO Antenna-2 6dB Bandwidth Measurements

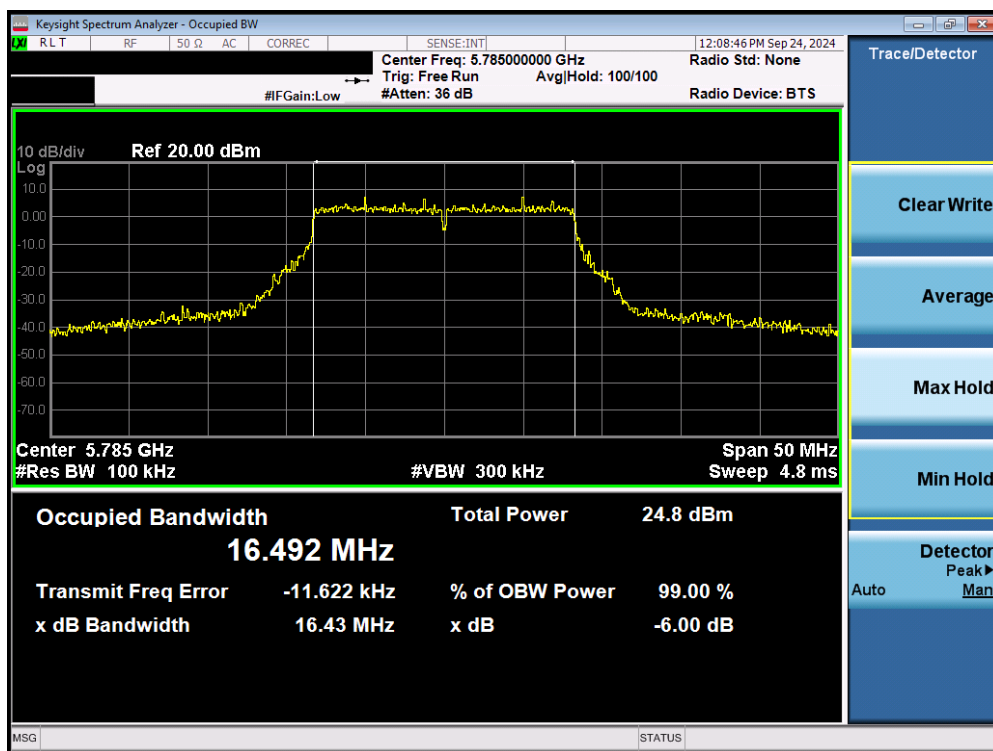


Plot 7-43. 6dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 3) – Ch.157)

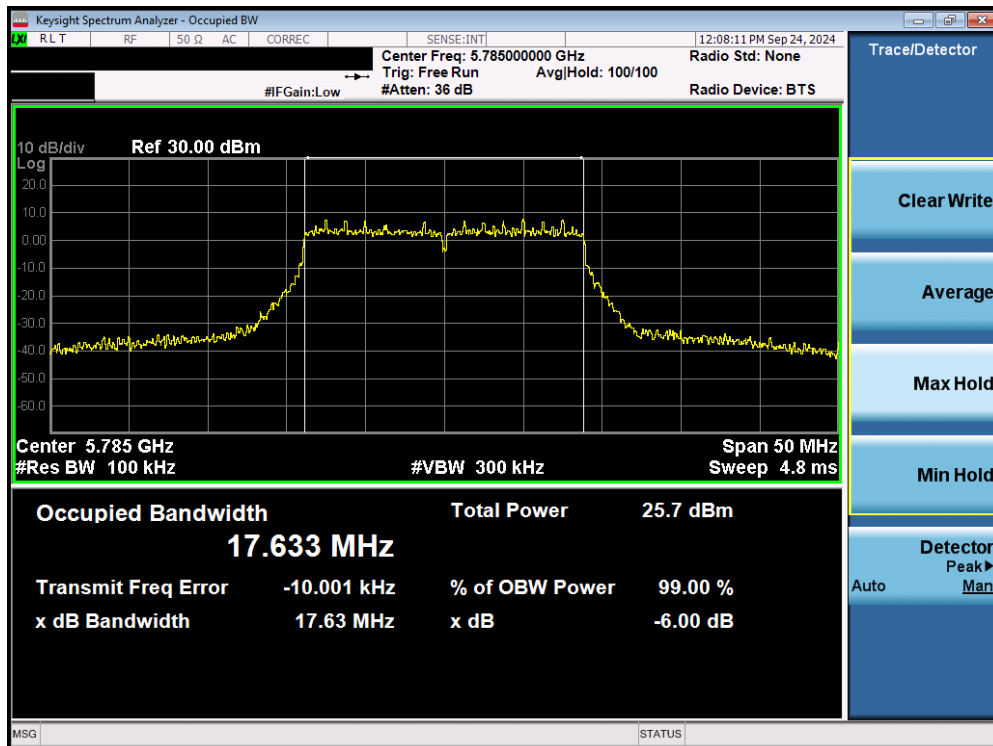


Plot 7-44. 6dB Bandwidth Plot MIMO ANT2 (20MHz 802.11n (UNII Band 3) – Ch.157)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 46 of 156

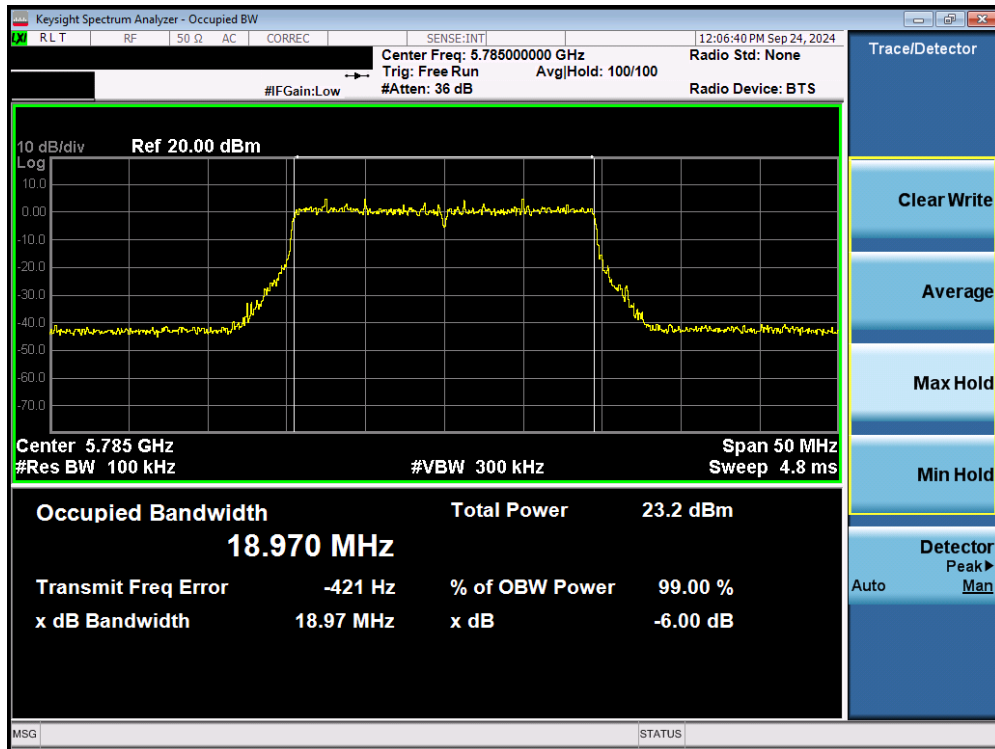


Plot 7-45. 6dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 3) – Ch.157)

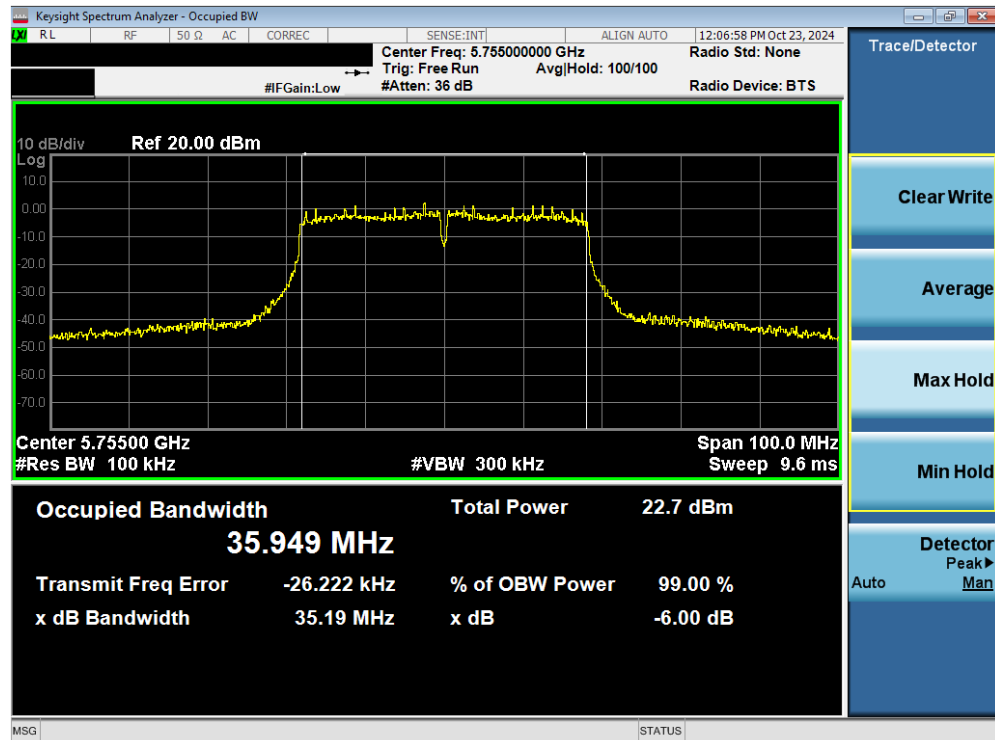

Plot 7-46. 6dB Bandwidth Plot MIMO ANT2 (40MHz 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 47 of 156

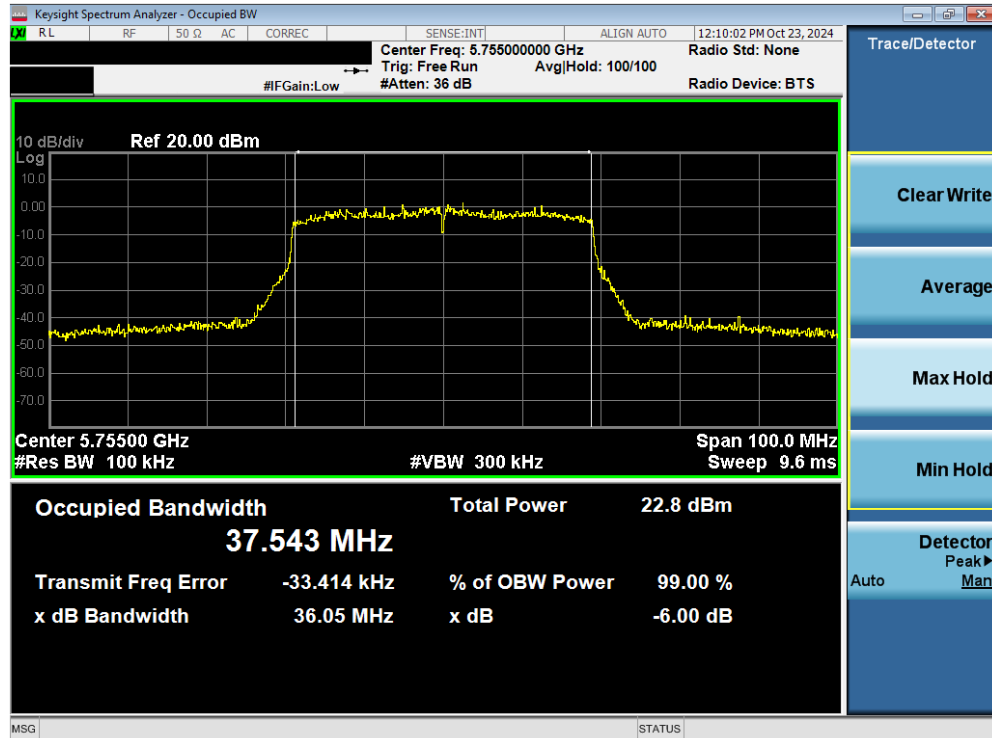


Plot 7-47. 6dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 3) – Ch. 151)




Plot 7-48. 6dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 48 of 156

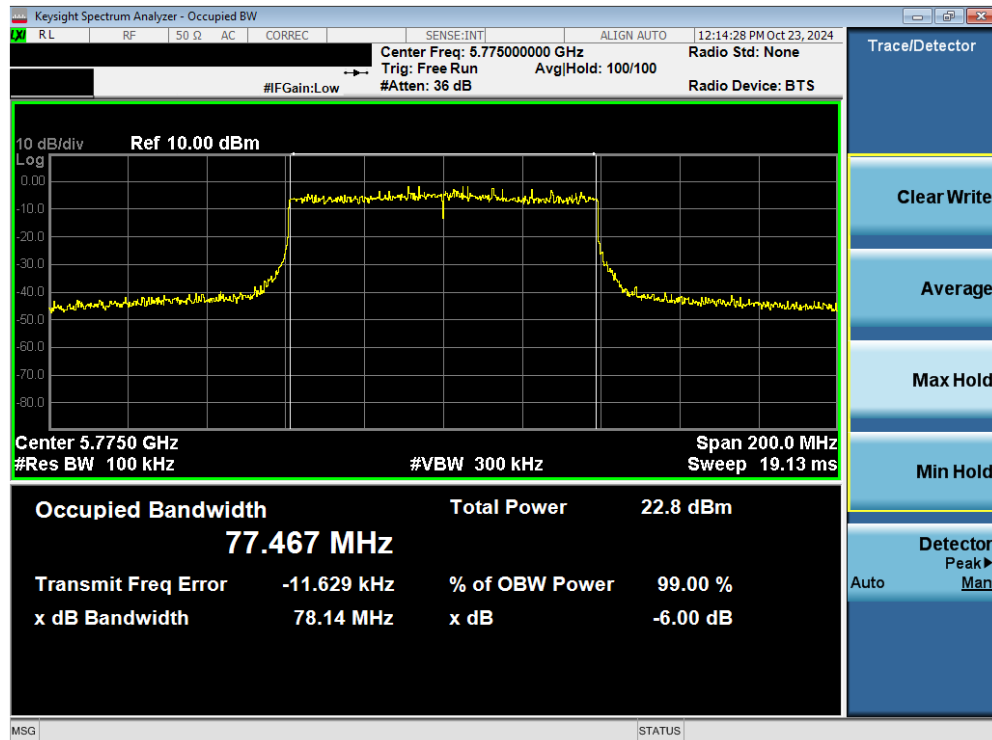


Plot 7-49. 6dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 3) – Ch. 155)

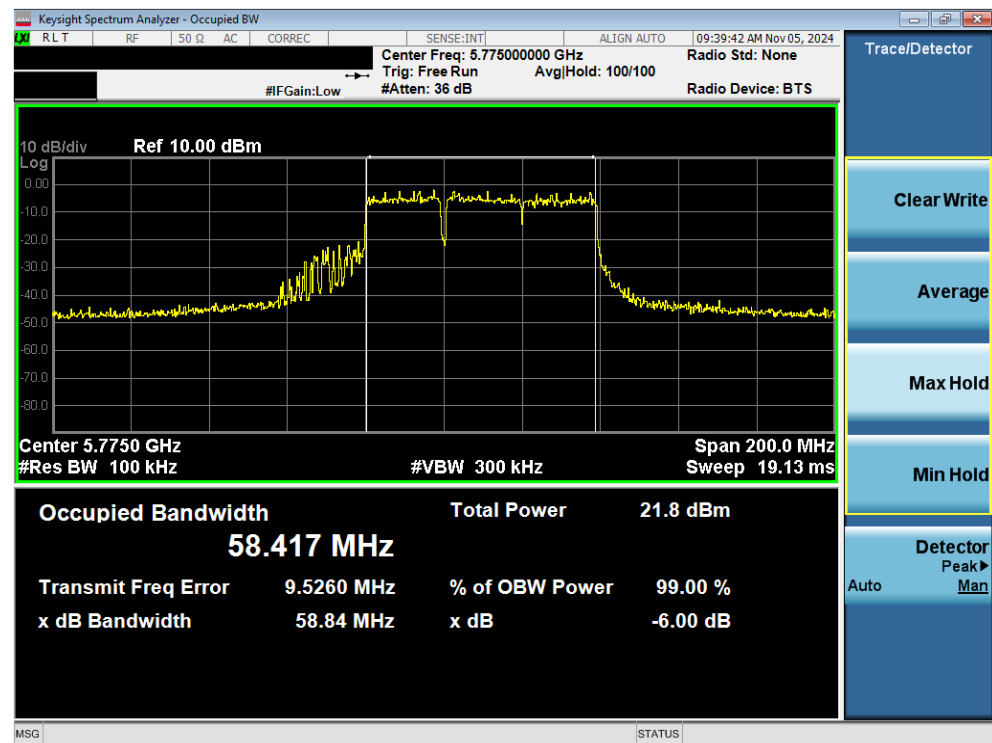


Plot 7-50. 6dB Bandwidth Plot MIMO ANT2 (80MHz 802.11be (20MHz Puncture) (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 49 of 156

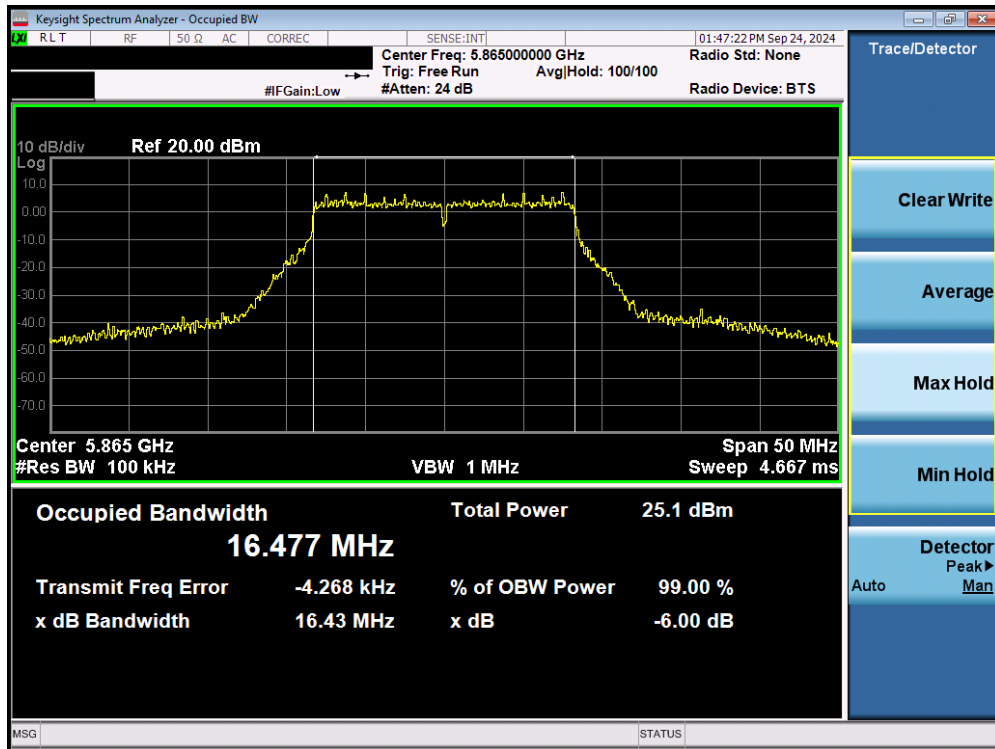


Plot 7-51. 6dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 4) – Ch.173)

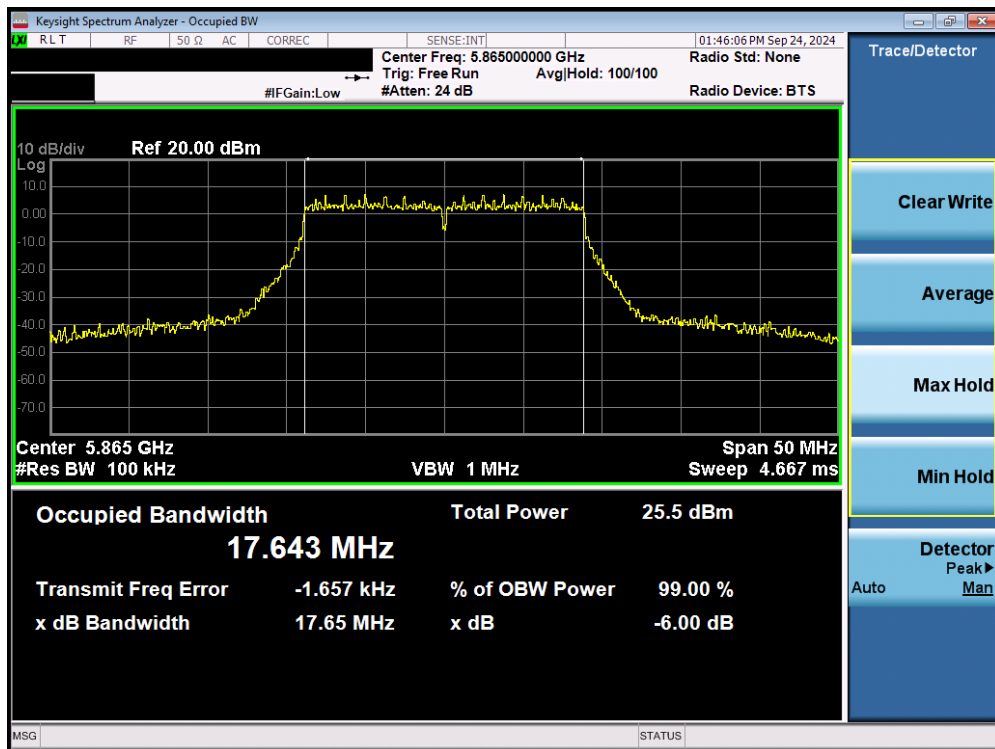


Plot 7-52. 6dB Bandwidth Plot MIMO ANT2 (20MHz 802.11n (UNII Band 4) – Ch.173)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 50 of 156

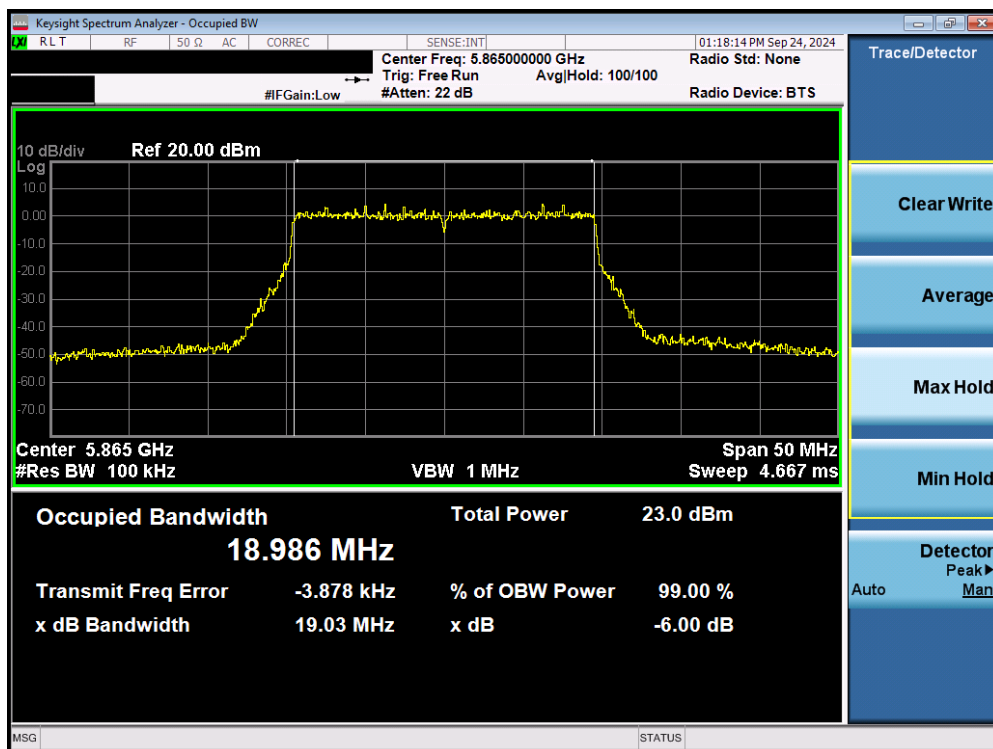


Plot 7-53. 6dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (UNII Band 4) – Ch.173)

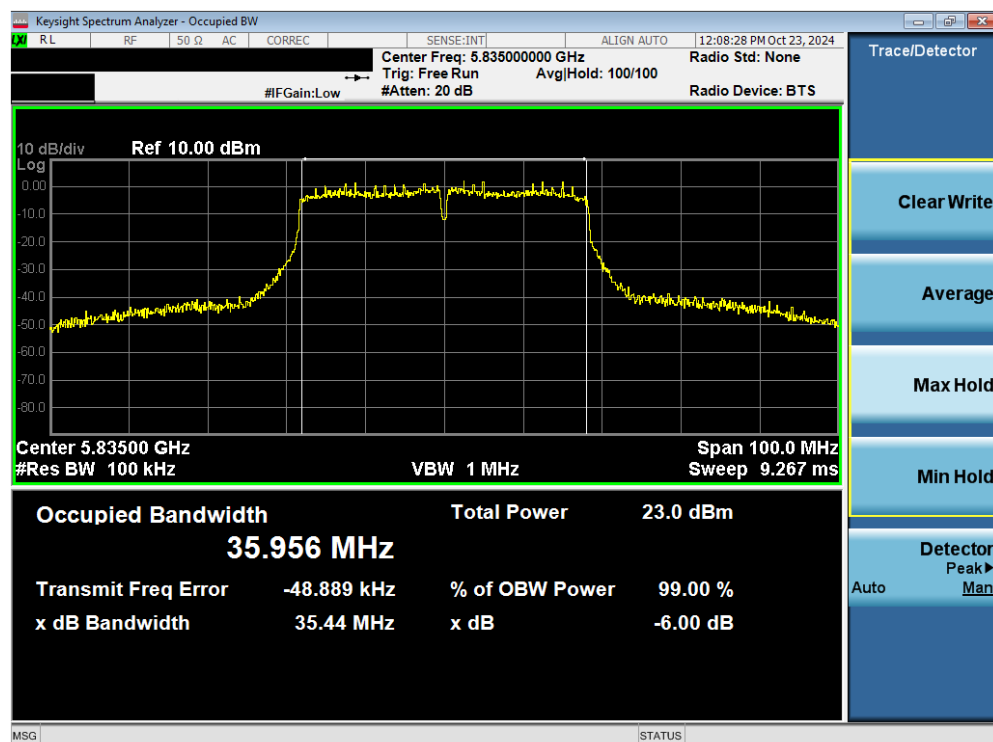


Plot 7-54. 6dB Bandwidth Plot MIMO ANT2 (40MHz 802.11n (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 51 of 156

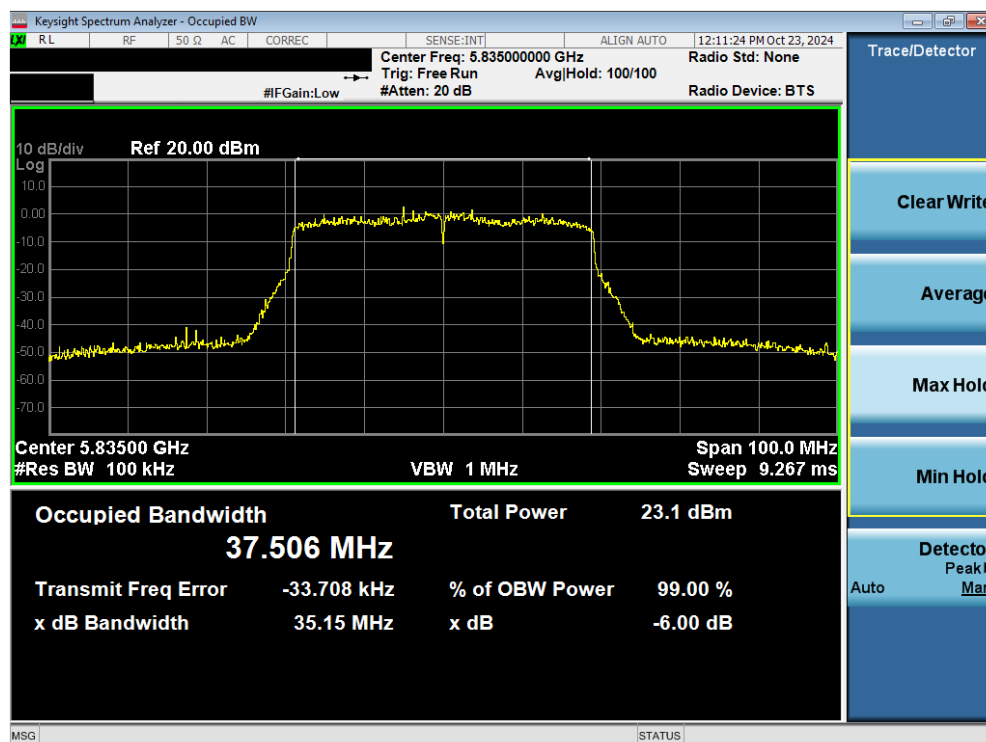


Plot 7-55. 6dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (UNII Band 3/4) – Ch. 167)

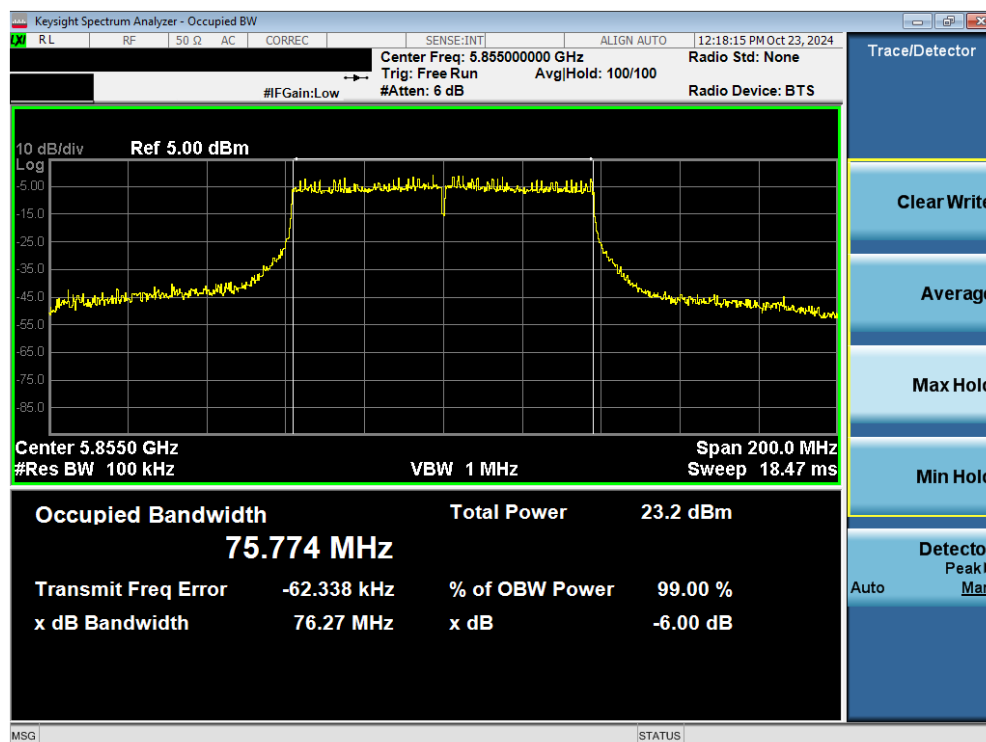


Plot 7-56. 6dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ac (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 52 of 156

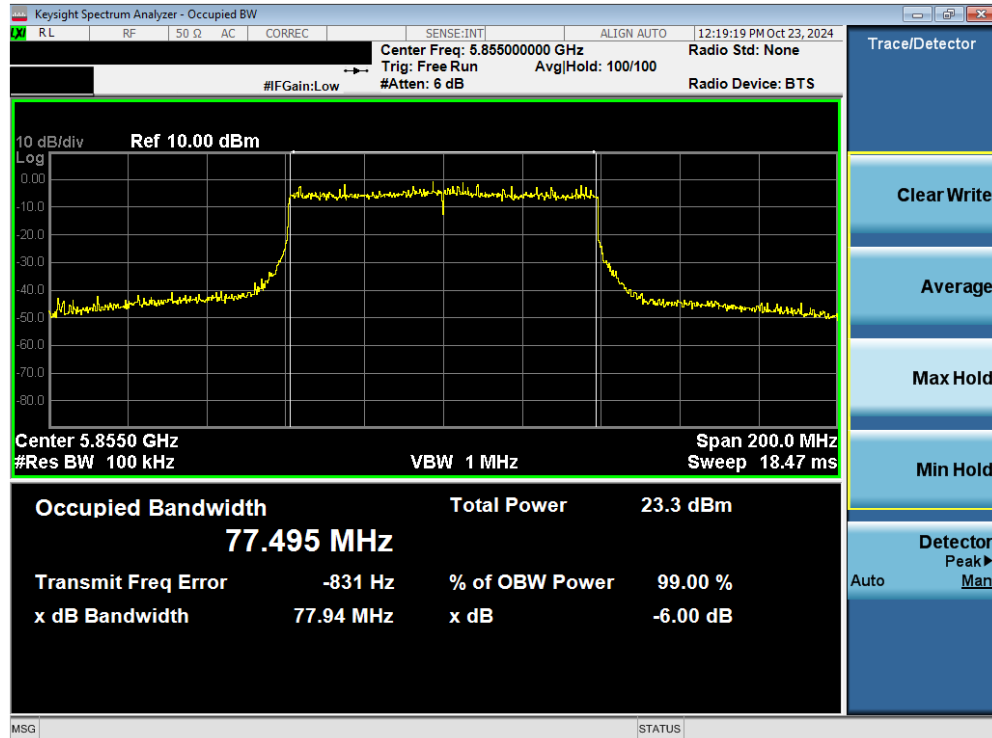


Plot 7-57. 6dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (UNII Band 3/4) – Ch. 171)

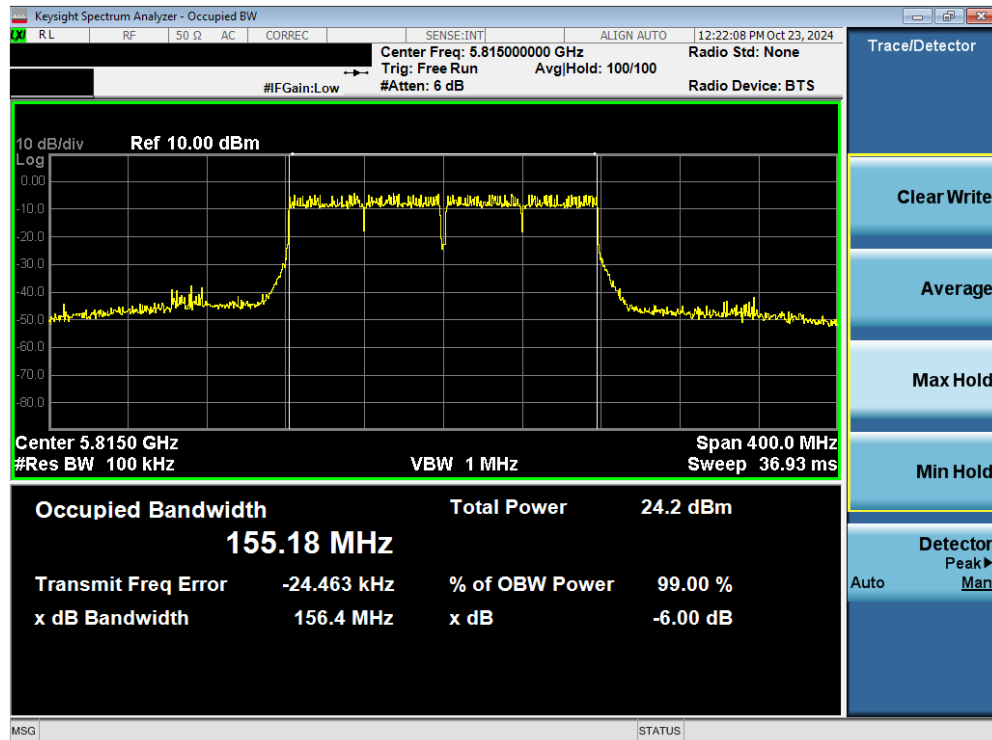


Plot 7-58. 6dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ac (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 53 of 156

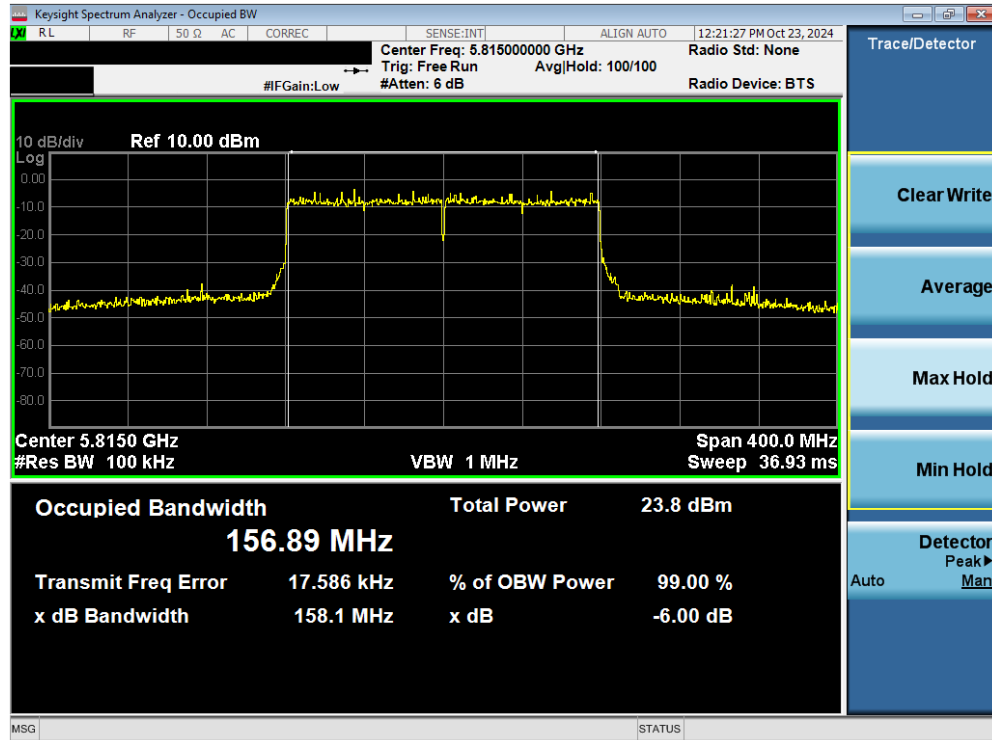


Plot 7-59. 6dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (UNII Band 3/4) – Ch. 163)

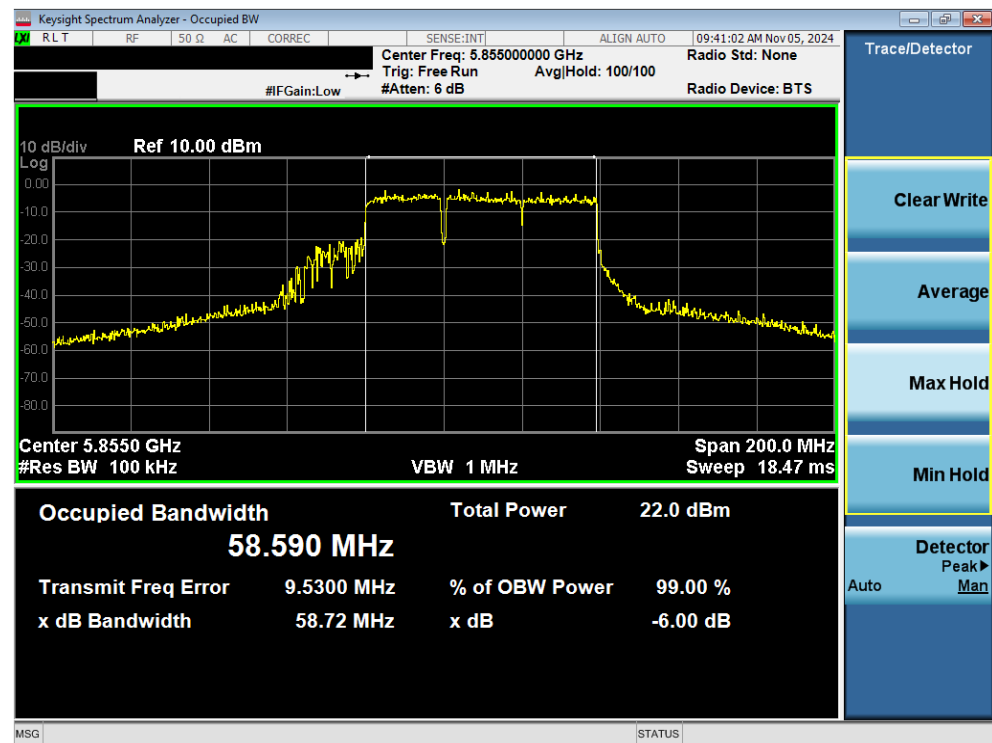

Plot 7-60. 6dB Bandwidth Plot MIMO ANT2 (80MHz 802.11be (20MHz Puncture) (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 54 of 156

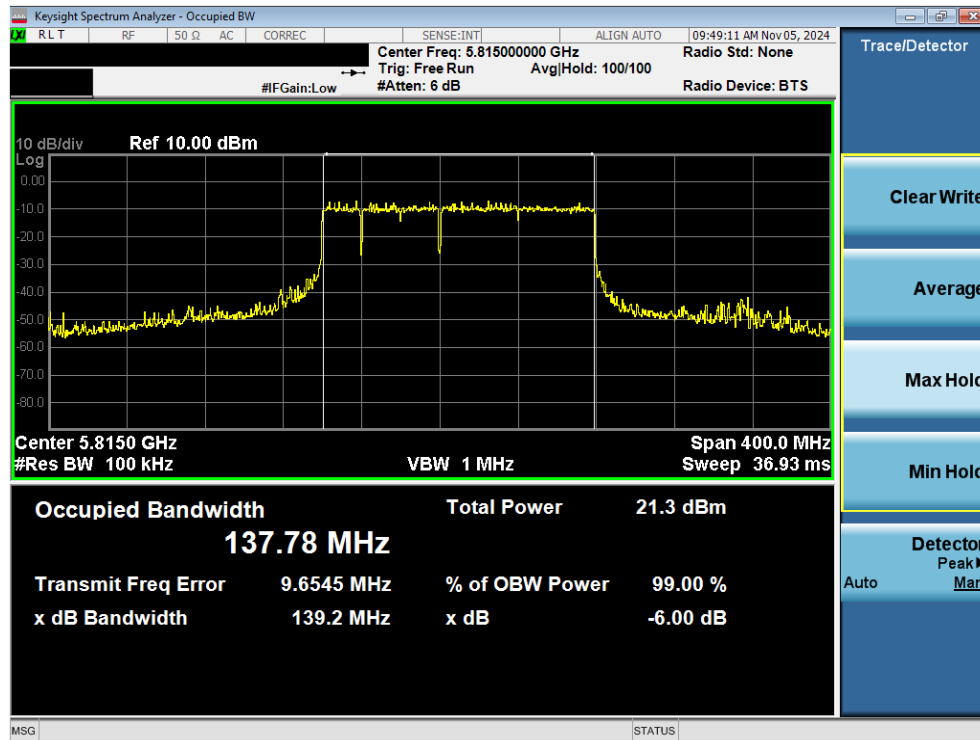

Plot 7-61. 6dB Bandwidth Plot MIMO ANT2 (160MHz 802.11be (20MHz Puncture) (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 55 of 156

7.4 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

The output power limits are as specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit	Maximum e.i.r.p
		FCC	FCC
UNII 1	5.15 – 5.25GHz	23.98dBm (250mW)	N/A
UNII 2A	5.25 – 5.35GHz	The lesser of 23.98dBm (250mW) or 11dBm + 10log ₁₀ B	N/A
UNII 2C	5.47 – 5.725GHz		
UNII 3	5.725 – 5.850GHz	30dBm (1W)	N/A
UNII 4	5.850 – 5.895GHz	N/A	30dBm (1W)

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 56 of 156

SISO ANT1 Maximum Conducted Output Power Measurements

5GHz WIFI (20MHz 802.11a SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	16.58	23.98	-7.40	-5.02	11.56	30.00	-18.44
	5200	40	17.33	23.98	-6.65	-5.02	12.31	30.00	-17.69
	5220	44	17.15	23.98	-6.83	-5.02	12.13	30.00	-17.87
	5240	48	17.38	23.98	-6.60	-5.02	12.36	30.00	-17.64
UNII-2A	5260	52	17.41	23.98	-6.57	-3.27	14.14	30.00	-15.86
	5280	56	17.10	23.98	-6.88	-3.27	13.83	30.00	-16.17
	5300	60	17.36	23.98	-6.62	-3.27	14.09	30.00	-15.91
	5320	64	17.37	23.98	-6.61	-3.27	14.10	30.00	-15.90
UNII-2C	5500	100	17.54	23.98	-6.44	-3.86	13.68	30.00	-16.32
	5600	120	17.51	23.98	-6.47	-3.86	13.65	30.00	-16.35
	5620	124	17.34	23.98	-6.64	-3.86	13.48	30.00	-16.52
	5720	144	17.27	23.98	-6.71	-3.86	13.41	30.00	-16.59
UNII-3	5745	149	17.14	30.00	-12.86	-3.52	13.62	36.00	-22.38
	5785	157	17.38	30.00	-12.62	-3.52	13.86	36.00	-22.14
	5825	165	17.25	30.00	-12.75	-3.52	13.73	36.00	-22.27
UNII-4	5845	169	17.27	-	-	-4.88	12.39	30.00	-17.61
	5865	173	17.34	-	-	-4.88	12.46	30.00	-17.54
	5885	177	17.03	-	-	-4.88	12.15	30.00	-17.85

Table 7-10. SISO ANT1 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11n SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	16.67	23.98	-7.31	-5.02	11.65	30.00	-18.35
	5200	40	17.38	23.98	-6.60	-5.02	12.36	30.00	-17.64
	5220	44	17.18	23.98	-6.80	-5.02	12.16	30.00	-17.84
	5240	48	17.01	23.98	-6.97	-5.02	11.99	30.00	-18.01
UNII-2A	5260	52	17.40	23.98	-6.58	-3.27	14.13	30.00	-15.87
	5280	56	17.07	23.98	-6.91	-3.27	13.80	30.00	-16.20
	5300	60	17.43	23.98	-6.55	-3.27	14.16	30.00	-15.84
	5320	64	16.88	23.98	-7.10	-3.27	13.61	30.00	-16.39
UNII-2C	5500	100	17.55	23.98	-6.43	-3.86	13.69	30.00	-16.31
	5600	120	17.50	23.98	-6.48	-3.86	13.64	30.00	-16.36
	5620	124	17.30	23.98	-6.68	-3.86	13.44	30.00	-16.56
	5720	144	17.22	23.98	-6.76	-3.86	13.36	30.00	-16.64
UNII-3	5745	149	17.01	30.00	-12.99	-3.52	13.49	36.00	-22.51
	5785	157	17.35	30.00	-12.65	-3.52	13.83	36.00	-22.17
	5825	165	17.26	30.00	-12.74	-3.52	13.74	36.00	-22.26
UNII-4	5845	169	17.22	-	-	-4.88	12.34	30.00	-17.66
	5865	173	17.34	-	-	-4.88	12.46	30.00	-17.54
	5885	177	17.53	-	-	-4.88	12.65	30.00	-17.35

Table 7-11. SISO ANT1 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 57 of 156

5GHz WIFI (20MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	16.55	23.98	-7.43	-5.02	11.53	30.00	-18.47
	5200	40	17.26	23.98	-6.72	-5.02	12.24	30.00	-17.76
	5220	44	17.04	23.98	-6.94	-5.02	12.02	30.00	-17.98
	5240	48	17.41	23.98	-6.57	-5.02	12.39	30.00	-17.61
UNII-2A	5260	52	17.29	23.98	-6.69	-3.27	14.02	30.00	-15.98
	5280	56	17.38	23.98	-6.60	-3.27	14.11	30.00	-15.89
	5300	60	17.32	23.98	-6.66	-3.27	14.05	30.00	-15.95
	5320	64	16.72	23.98	-7.26	-3.27	13.45	30.00	-16.55
UNII-2C	5500	100	17.24	23.98	-6.74	-3.86	13.38	30.00	-16.62
	5600	120	17.24	23.98	-6.74	-3.86	13.38	30.00	-16.62
	5620	124	17.24	23.98	-6.74	-3.86	13.38	30.00	-16.62
	5720	144	17.38	23.98	-6.60	-3.86	13.52	30.00	-16.48
UNII-3	5745	149	17.18	30.00	-12.82	-3.52	13.66	36.00	-22.34
	5785	157	17.56	30.00	-12.44	-3.52	14.04	36.00	-21.96
	5825	165	17.42	30.00	-12.58	-3.52	13.90	36.00	-22.10
UNII-4	5845	169	17.57	-	-	-4.88	12.69	30.00	-17.31
	5865	173	17.61	-	-	-4.88	12.73	30.00	-17.27
	5885	177	17.11	-	-	-4.88	12.23	30.00	-17.77

Table 7-12. SISO ANT1 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11ax SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	15.16	23.98	-8.82	-5.02	10.14	30.00	-19.86
	5200	40	15.33	23.98	-8.65	-5.02	10.31	30.00	-19.69
	5220	44	15.22	23.98	-8.76	-5.02	10.20	30.00	-19.80
	5240	48	15.01	23.98	-8.97	-5.02	9.99	30.00	-20.01
UNII-2A	5260	52	15.45	23.98	-8.53	-3.27	12.18	30.00	-17.82
	5280	56	15.02	23.98	-8.96	-3.27	11.75	30.00	-18.25
	5300	60	15.44	23.98	-8.54	-3.27	12.17	30.00	-17.83
	5320	64	15.46	23.98	-8.52	-3.27	12.19	30.00	-17.81
UNII-2C	5500	100	15.07	23.98	-8.91	-3.86	11.21	30.00	-18.79
	5620	124	15.54	23.98	-8.44	-3.86	11.68	30.00	-18.32
	5640	128	15.48	23.98	-8.50	-3.86	11.62	30.00	-18.38
	5720	144	15.05	23.98	-8.93	-3.86	11.19	30.00	-18.81
UNII-3	5745	149	15.34	30.00	-14.66	-3.52	11.82	36.00	-24.18
	5785	157	15.28	30.00	-14.72	-3.52	11.76	36.00	-24.24
	5825	165	15.18	30.00	-14.82	-3.52	11.66	36.00	-24.34
UNII-4	5845	169	15.24	-	-	-4.88	10.36	30.00	-19.64
	5865	173	15.28	-	-	-4.88	10.40	30.00	-19.60
	5885	177	15.36	-	-	-4.88	10.48	30.00	-19.52

Table 7-13. SISO ANT1 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 58 of 156

5GHz WIFI (20MHz 802.11be SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	15.12	23.98	-8.86	-5.02	10.10	30.00	-19.90
	5200	40	15.29	23.98	-8.69	-5.02	10.27	30.00	-19.73
	5220	44	15.18	23.98	-8.80	-5.02	10.16	30.00	-19.84
	5240	48	15.01	23.98	-8.97	-5.02	9.99	30.00	-20.01
UNII-2A	5260	52	15.41	23.98	-8.57	-3.27	12.14	30.00	-17.86
	5280	56	15.04	23.98	-8.94	-3.27	11.77	30.00	-18.23
	5300	60	15.40	23.98	-8.58	-3.27	12.13	30.00	-17.87
	5320	64	15.42	23.98	-8.56	-3.27	12.15	30.00	-17.85
UNII-2C	5500	100	15.03	23.98	-8.95	-3.86	11.17	30.00	-18.83
	5600	120	15.01	23.98	-8.97	-3.86	11.15	30.00	-18.85
	5620	124	15.50	23.98	-8.48	-3.86	11.64	30.00	-18.36
	5720	144	15.01	23.98	-8.97	-3.86	11.15	30.00	-18.85
UNII-3	5745	149	15.30	30.00	-14.70	-6.52	8.78	36.00	-27.22
	5785	157	15.24	30.00	-14.76	-6.52	8.72	36.00	-27.28
	5825	165	15.14	30.00	-14.86	-6.52	8.62	36.00	-27.38
UNII-4	5845	169	15.20	-	-	-4.88	10.32	30.00	-19.68
	5865	173	15.24	-	-	-4.88	10.36	30.00	-19.64
	5885	177	15.32	-	-	-4.88	10.44	30.00	-19.56

Table 7-14. SISO ANT1 20MHz BW 802.11be (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 59 of 156

5GHz WIFI (40MHz 802.11n SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	14.04	23.98	-9.94	-5.02	9.02	30.00	-20.98
	5230	46	15.33	23.98	-8.65	-5.02	10.31	30.00	-19.69
UNII-2A	5270	54	15.40	23.98	-8.58	-3.27	12.13	30.00	-17.87
	5310	62	13.75	23.98	-10.23	-3.27	10.48	30.00	-19.52
UNII-2C	5510	102	13.89	23.98	-10.09	-3.86	10.03	30.00	-19.97
	5590	118	15.51	23.98	-8.47	-3.86	11.65	30.00	-18.35
	5630	126	15.44	23.98	-8.54	-3.86	11.58	30.00	-18.42
	5710	142	15.45	23.98	-8.53	-3.86	11.59	30.00	-18.41
UNII-3	5755	151	15.29	30.00	-14.71	-3.52	11.77	36.00	-24.23
	5795	159	15.02	30.00	-14.98	-3.52	11.50	36.00	-24.50
UNII-4	5835	167	15.41	-	-	-3.52	11.89	30.00	-18.11
	5875	175	15.25	-	-	-4.88	10.37	30.00	-19.63

Table 7-15. SISO ANT1 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	15.08	23.98	-8.90	-5.02	10.06	30.00	-19.94
	5230	46	15.37	23.98	-8.61	-5.02	10.35	30.00	-19.65
UNII-2A	5270	54	15.44	23.98	-8.54	-3.27	12.17	30.00	-17.83
	5310	62	15.33	23.98	-8.65	-3.27	12.06	30.00	-17.94
UNII-2C	5510	102	15.21	23.98	-8.77	-3.86	11.35	30.00	-18.65
	5590	118	15.55	23.98	-8.43	-3.86	11.69	30.00	-18.31
	5630	126	15.48	23.98	-8.50	-3.86	11.62	30.00	-18.38
	5710	142	15.49	23.98	-8.49	-3.86	11.63	30.00	-18.37
UNII-3	5755	151	15.33	30.00	-14.67	-3.52	11.81	36.00	-24.19
	5795	159	15.06	30.00	-14.94	-3.52	11.54	36.00	-24.46
UNII-4	5835	167	15.45	-	-	-3.52	11.93	30.00	-18.07
	5875	175	15.29	-	-	-4.88	10.41	30.00	-19.59

Table 7-16. SISO ANT1 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11ax SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	13.94	23.98	-10.04	-5.02	8.92	30.00	-21.08
	5230	46	15.38	23.98	-8.60	-5.02	10.36	30.00	-19.64
UNII-2A	5270	54	15.25	23.98	-8.73	-3.27	11.98	30.00	-18.02
	5310	62	15.28	23.98	-8.70	-3.27	12.01	30.00	-17.99
UNII-2C	5510	102	15.36	23.98	-8.62	-3.86	11.50	30.00	-18.50
	5590	118	15.37	23.98	-8.61	-3.86	11.51	30.00	-18.49
	5630	126	15.28	23.98	-8.70	-3.86	11.42	30.00	-18.58
	5710	142	15.43	23.98	-8.55	-3.86	11.57	30.00	-18.43
UNII-3	5755	151	15.18	30.00	-14.82	-3.52	11.66	36.00	-24.34
	5795	159	15.01	30.00	-14.99	-3.52	11.49	36.00	-24.51
UNII-4	5835	167	15.05	-	-	-3.52	11.53	30.00	-18.47
	5875	175	15.27	-	-	-4.88	10.39	30.00	-19.61

Table 7-17. SISO ANT1 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 60 of 156

5GHz WIFI (40MHz 802.11be SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	13.86	23.98	-10.12	-5.02	8.84	30.00	-21.16
	5230	46	15.06	23.98	-8.92	-5.02	10.04	30.00	-19.96
UNII-2A	5270	54	15.04	23.98	-8.94	-3.27	11.77	30.00	-18.23
	5310	62	15.09	23.98	-8.89	-3.27	11.82	30.00	-18.18
UNII-2C	5510	102	15.17	23.98	-8.81	-3.86	11.31	30.00	-18.69
	5590	118	15.26	23.98	-8.72	-3.86	11.40	30.00	-18.60
	5630	126	15.09	23.98	-8.89	-3.86	11.23	30.00	-18.77
	5710	142	15.19	23.98	-8.79	-3.86	11.33	30.00	-18.67
UNII-3	5755	151	15.01	30.00	-14.99	-6.52	8.49	36.00	-27.51
	5795	159	15.30	30.00	-14.70	-6.52	8.78	36.00	-27.22
UNII-4	5835	167	15.28	-	-	-4.88	10.40	30.00	-19.60
	5875	175	15.09	-	-	-4.88	10.21	30.00	-19.79

Table 7-18. SISO ANT1 40MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	11.23	23.98	-12.75	-5.02	6.21	30.00	-23.79
UNII-2A	5290	58	12.43	23.98	-11.55	-3.27	9.16	30.00	-20.84
	5530	106	11.63	23.98	-12.35	-3.86	7.77	30.00	-22.23
UNII-2C	5610	122	14.21	23.98	-9.77	-3.86	10.35	30.00	-19.65
	5690	138	14.22	23.98	-9.76	-3.86	10.36	30.00	-19.64
UNII-3	5775	155	14.32	30.00	-15.68	-3.52	10.80	36.00	-25.20
UNII-4	5885	171	14.56	-	-	-3.52	11.04	30.00	-18.96

Table 7-19. SISO ANT1 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 61 of 156

5GHz WIFI (80MHz 802.11ax SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	13.16	23.98	-10.82	-5.02	8.14	30.00	-21.86
UNII-2A	5290	58	14.07	23.98	-9.91	-3.27	10.80	30.00	-19.20
UNII-2C	5530	106	13.20	23.98	-10.78	-3.86	9.34	30.00	-20.66
	5610	122	14.06	23.98	-9.92	-3.86	10.20	30.00	-19.80
	5690	138	14.26	23.98	-9.72	-3.86	10.40	30.00	-19.60
UNII-3	5775	155	14.23	30.00	-15.77	-3.52	10.71	36.00	-25.29
UNII-4	5885	171	14.56	-	-	-3.52	11.04	30.00	-18.96

Table 7-20. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11be SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	10.53	23.98	-13.45	-5.02	5.51	30.00	-24.49
UNII-2A	5290	58	11.77	23.98	-12.21	-3.27	8.50	30.00	-21.50
UNII-2C	5530	106	11.33	23.98	-12.65	-3.86	7.47	30.00	-22.53
	5610	122	14.34	23.98	-9.64	-3.86	10.48	30.00	-19.52
	5690	138	14.54	23.98	-9.44	-3.86	10.68	30.00	-19.32
UNII-3	5775	155	14.01	30.00	-15.99	-6.52	7.49	36.00	-28.51
UNII-4	5885	171	14.39	-	-	-4.88	9.51	30.00	-20.49

Table 7-21. SISO ANT1 80MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ac SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1/2A	5250	50	13.30	23.98	-10.68	-3.27	10.03	30.00	-19.97
UNII-2C	5570	114	13.01	23.98	-10.97	-3.86	9.15	30.00	-20.85
UNII-3/4	5815	163	13.22	30.00	-16.78	-3.52	9.70	30.00	-20.30

Table 7-22. SISO ANT1 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ax SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1/2A	5250	50	13.07	23.98	-10.91	-3.27	9.80	30.00	-20.20
UNII-2C	5570	114	13.47	23.98	-10.51	-3.86	9.61	30.00	-20.39
UNII-3/4	5815	163	13.52	30.00	-16.48	-3.52	10.00	30.00	-20.00

Table 7-23. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11be SISO ANT1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1/2A	5250	50	13.36	23.98	-10.62	-3.27	10.09	30.00	-19.91
UNII-2C	5570	114	13.30	23.98	-10.68	-3.86	9.44	30.00	-20.56
UNII-3/4	5815	163	13.35	30.00	-16.65	-4.88	8.47	30.00	-21.53

Table 7-24. SISO ANT1 160MHz BW 802.11be (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset		Page 62 of 156

SISO ANT2 Maximum Conducted Output Power Measurements

5GHz WIFI (20MHz 802.11a SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	16.58	23.98	-7.40	-5.68	10.90	30.00	-19.10
	5200	40	17.34	23.98	-6.64	-5.68	11.66	30.00	-18.34
	5220	44	17.55	23.98	-6.43	-5.68	11.87	30.00	-18.13
	5240	48	17.46	23.98	-6.52	-5.68	11.78	30.00	-18.22
UNII-2A	5260	52	17.20	23.98	-6.78	-5.41	11.79	30.00	-18.21
	5280	56	17.11	23.98	-6.87	-5.41	11.70	30.00	-18.30
	5300	60	17.11	23.98	-6.87	-5.41	11.70	30.00	-18.30
	5320	64	17.41	23.98	-6.57	-5.41	12.00	30.00	-18.00
UNII-2C	5500	100	17.40	23.98	-6.58	-5.50	11.90	30.00	-18.10
	5600	120	17.45	23.98	-6.53	-5.50	11.95	30.00	-18.05
	5620	124	17.01	23.98	-6.97	-5.50	11.51	30.00	-18.49
	5720	144	17.33	23.98	-6.65	-5.50	11.83	30.00	-18.17
UNII-3	5745	149	17.23	30.00	-12.77	-4.80	12.43	36.00	-23.57
	5785	157	17.40	30.00	-12.60	-4.80	12.60	36.00	-23.40
	5825	165	17.49	30.00	-12.51	-4.80	12.69	36.00	-23.31
UNII-4	5845	169	17.46	-	-	-3.65	13.81	30.00	-16.19
	5865	173	17.42	-	-	-3.65	13.77	30.00	-16.23
	5885	177	17.37	-	-	-3.65	13.72	30.00	-16.28

Table 7-25. SISO ANT2 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11n SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	16.63	23.98	-7.35	-5.68	10.95	30.00	-19.05
	5200	40	17.36	23.98	-6.62	-5.68	11.68	30.00	-18.32
	5220	44	17.55	23.98	-6.43	-5.68	11.87	30.00	-18.13
	5240	48	17.48	23.98	-6.50	-5.68	11.80	30.00	-18.20
UNII-2A	5260	52	17.18	23.98	-6.80	-5.41	11.77	30.00	-18.23
	5280	56	17.08	23.98	-6.90	-5.41	11.67	30.00	-18.33
	5300	60	17.10	23.98	-6.88	-5.41	11.69	30.00	-18.31
	5320	64	16.93	23.98	-7.05	-5.41	11.52	30.00	-18.48
UNII-2C	5500	100	17.37	23.98	-6.61	-5.50	11.87	30.00	-18.13
	5600	120	17.45	23.98	-6.53	-5.50	11.95	30.00	-18.05
	5620	124	17.34	23.98	-6.64	-5.50	11.84	30.00	-18.16
	5720	144	17.39	23.98	-6.59	-5.50	11.89	30.00	-18.11
UNII-3	5745	149	17.20	30.00	-12.80	-4.80	12.40	36.00	-23.60
	5785	157	17.41	30.00	-12.59	-4.80	12.61	36.00	-23.39
	5825	165	17.01	30.00	-12.99	-4.80	12.21	36.00	-23.79
UNII-4	5845	169	17.40	-	-	-3.65	13.75	30.00	-16.25
	5865	173	17.34	-	-	-3.65	13.69	30.00	-16.31
	5885	177	17.36	-	-	-3.65	13.71	30.00	-16.29

Table 7-26. SISO ANT2 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 63 of 156

5GHz WIFI (20MHz 802.11ac SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	16.71	23.98	-7.27	-5.68	11.03	30.00	-18.97
	5200	40	17.37	23.98	-6.61	-5.68	11.69	30.00	-18.31
	5220	44	17.15	23.98	-6.83	-5.68	11.47	30.00	-18.53
	5240	48	17.05	23.98	-6.93	-5.68	11.37	30.00	-18.63
UNII-2A	5260	52	17.37	23.98	-6.61	-5.41	11.96	30.00	-18.04
	5280	56	17.36	23.98	-6.62	-5.41	11.95	30.00	-18.05
	5300	60	17.40	23.98	-6.58	-5.41	11.99	30.00	-18.01
	5320	64	16.69	23.98	-7.29	-5.41	11.28	30.00	-18.72
UNII-2C	5500	100	17.29	23.98	-6.69	-5.50	11.79	30.00	-18.21
	5600	120	17.31	23.98	-6.67	-5.50	11.81	30.00	-18.19
	5620	124	17.17	23.98	-6.81	-5.50	11.67	30.00	-18.33
	5720	144	17.31	23.98	-6.67	-5.50	11.81	30.00	-18.19
UNII-3	5745	149	17.14	30.00	-12.86	-4.80	12.34	36.00	-23.66
	5785	157	17.33	30.00	-12.67	-4.80	12.53	36.00	-23.47
	5825	165	17.42	30.00	-12.58	-4.80	12.62	36.00	-23.38
UNII-4	5845	169	17.45	-	-	-3.65	13.80	30.00	-16.20
	5865	173	17.38	-	-	-3.65	13.73	30.00	-16.27
	5885	177	17.40	-	-	-3.65	13.75	30.00	-16.25

Table 7-27. SISO ANT2 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11ax SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	15.47	23.98	-8.51	-5.68	9.79	30.00	-20.21
	5200	40	15.62	23.98	-8.36	-5.68	9.94	30.00	-20.06
	5220	44	15.81	23.98	-8.17	-5.68	10.13	30.00	-19.87
	5240	48	15.77	23.98	-8.21	-5.68	10.09	30.00	-19.91
UNII-2A	5260	52	15.46	23.98	-8.52	-5.41	10.05	30.00	-19.95
	5280	56	15.49	23.98	-8.49	-5.41	10.08	30.00	-19.92
	5300	60	15.67	23.98	-8.31	-5.41	10.26	30.00	-19.74
	5320	64	15.33	23.98	-8.65	-5.41	9.92	30.00	-20.08
UNII-2C	5500	100	15.95	23.98	-8.03	-5.50	10.45	30.00	-19.55
	5600	120	15.51	23.98	-8.47	-5.50	10.01	30.00	-19.99
	5620	124	15.38	23.98	-8.60	-5.50	9.88	30.00	-20.12
	5720	144	15.54	23.98	-8.44	-5.50	10.04	30.00	-19.96
UNII-3	5745	149	15.85	30.00	-14.15	-4.80	11.05	36.00	-24.95
	5785	157	15.60	30.00	-14.40	-4.80	10.80	36.00	-25.20
	5825	165	15.65	30.00	-14.35	-4.80	10.85	36.00	-25.15
UNII-4	5845	169	15.63	-	-	-3.65	11.98	30.00	-18.02
	5865	173	15.50	-	-	-3.65	11.85	30.00	-18.15
	5885	177	15.56	-	-	-3.65	11.91	30.00	-18.09

Table 7-28. SISO ANT2 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 64 of 156

5GHz WIFI (20MHz 802.11be SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5180	36	15.42	23.98	-8.56	-5.68	9.74	30.00	-20.26
	5200	40	15.57	23.98	-8.41	-5.68	9.89	30.00	-20.11
	5220	44	15.76	23.98	-8.22	-5.68	10.08	30.00	-19.92
	5240	48	15.72	23.98	-8.26	-5.68	10.04	30.00	-19.96
UNII-2A	5260	52	15.41	23.98	-8.57	-5.41	10.00	30.00	-20.00
	5280	56	15.44	23.98	-8.54	-5.41	10.03	30.00	-19.97
	5300	60	15.62	23.98	-8.36	-5.41	10.21	30.00	-19.79
	5320	64	15.28	23.98	-8.70	-5.41	9.87	30.00	-20.13
UNII-2C	5500	100	15.90	23.98	-8.08	-5.50	10.40	30.00	-19.60
	5600	120	15.46	23.98	-8.52	-5.50	9.96	30.00	-20.04
	5620	124	15.33	23.98	-8.65	-5.50	9.83	30.00	-20.17
	5720	144	15.49	23.98	-8.49	-5.50	9.99	30.00	-20.01
UNII-3	5745	149	15.80	30.00	-14.20	-4.80	11.00	36.00	-25.00
	5785	157	15.55	30.00	-14.45	-4.80	10.75	36.00	-25.25
	5825	165	15.60	30.00	-14.40	-4.80	10.80	36.00	-25.20
UNII-4	5845	169	15.58	-	-	-3.65	11.93	30.00	-18.07
	5865	173	15.45	-	-	-3.65	11.80	30.00	-18.20
	5885	177	15.51	-	-	-3.65	11.86	30.00	-18.14

Table 7-29. SISO ANT2 20MHz BW 802.11be (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 65 of 156

5GHz WIFI (40MHz 802.11n SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	13.80	23.98	-10.18	-5.02	8.78	30.00	-21.22
	5230	46	15.07	23.98	-8.91	-5.02	10.05	30.00	-19.95
UNII-2A	5270	54	15.36	23.98	-8.62	-3.27	12.09	30.00	-17.91
	5310	62	13.79	23.98	-10.19	-3.27	10.52	30.00	-19.48
UNII-2C	5510	102	13.90	23.98	-10.08	-3.86	10.04	30.00	-19.96
	5590	118	15.47	23.98	-8.51	-3.86	11.61	30.00	-18.39
	5630	126	15.30	23.98	-8.68	-3.86	11.44	30.00	-18.56
	5710	142	15.34	23.98	-8.64	-3.86	11.48	30.00	-18.52
UNII-3	5755	151	15.16	30.00	-14.84	-3.52	11.64	36.00	-24.36
	5795	159	15.43	30.00	-14.57	-3.52	11.91	36.00	-24.09
UNII-4	5835	167	15.07	-	-	-3.65	11.42	30.00	-18.58
	5875	175	15.12	-	-	-3.65	11.47	30.00	-18.53

Table 7-30. SISO ANT2 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11ac SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	15.42	23.98	-8.56	-5.02	10.40	30.00	-19.60
	5230	46	15.13	23.98	-8.85	-5.02	10.11	30.00	-19.89
UNII-2A	5270	54	15.42	23.98	-8.56	-3.27	12.15	30.00	-17.85
	5310	62	15.42	23.98	-8.56	-3.27	12.15	30.00	-17.85
UNII-2C	5510	102	15.38	23.98	-8.60	-3.86	11.52	30.00	-18.48
	5590	118	15.53	23.98	-8.45	-3.86	11.67	30.00	-18.33
	5630	126	15.36	23.98	-8.62	-3.86	11.50	30.00	-18.50
	5710	142	15.40	23.98	-8.58	-3.86	11.54	30.00	-18.46
UNII-3	5755	151	15.22	30.00	-14.78	-3.52	11.70	36.00	-24.30
	5795	159	15.49	30.00	-14.51	-3.52	11.97	36.00	-24.03
UNII-4	5835	167	15.13	-	-	-3.65	11.48	30.00	-18.52
	5875	175	15.18	-	-	-3.65	11.53	30.00	-18.47

Table 7-31. SISO ANT2 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11ax SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	13.77	23.98	-10.21	-5.02	8.75	30.00	-21.25
	5230	46	15.50	23.98	-8.48	-5.02	10.48	30.00	-19.52
UNII-2A	5270	54	15.37	23.98	-8.61	-3.27	12.10	30.00	-17.90
	5310	62	15.34	23.98	-8.64	-3.27	12.07	30.00	-17.93
UNII-2C	5510	102	15.34	23.98	-8.64	-3.86	11.48	30.00	-18.52
	5590	118	15.46	23.98	-8.52	-3.86	11.60	30.00	-18.40
	5630	126	15.26	23.98	-8.72	-3.86	11.40	30.00	-18.60
	5710	142	15.34	23.98	-8.64	-3.86	11.48	30.00	-18.52
UNII-3	5755	151	15.15	30.00	-14.85	-3.52	11.63	36.00	-24.37
	5795	159	15.47	30.00	-14.53	-3.52	11.95	36.00	-24.05
UNII-4	5835	167	15.06	-	-	-3.65	11.41	30.00	-18.59
	5875	175	15.11	-	-	-3.65	11.46	30.00	-18.54

Table 7-32. SISO ANT2 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset		Page 66 of 156

5GHz WIFI (20MHz 802.11be SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5190	38	13.65	23.98	-10.33	-5.02	8.63	30.00	-21.37
	5230	46	15.35	23.98	-8.63	-5.02	10.33	30.00	-19.67
UNII-2A	5270	54	15.24	23.98	-8.74	-3.27	11.97	30.00	-18.03
	5310	62	15.25	23.98	-8.73	-3.27	11.98	30.00	-18.02
UNII-2C	5510	102	15.23	23.98	-8.75	-3.86	11.37	30.00	-18.63
	5590	118	15.40	23.98	-8.58	-3.86	11.54	30.00	-18.46
	5630	126	15.12	23.98	-8.86	-3.86	11.26	30.00	-18.74
	5710	142	15.21	23.98	-8.77	-3.86	11.35	30.00	-18.65
UNII-3	5755	151	15.08	30.00	-14.92	-6.52	8.56	36.00	-27.44
	5795	159	15.34	30.00	-14.66	-6.52	8.82	36.00	-27.18
UNII-4	5835	167	15.53	-	-	-3.65	11.88	30.00	-18.12
	5875	175	15.43	-	-	-3.65	11.78	30.00	-18.22

Table 7-33. SISO ANT2 40MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11ac SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	11.41	23.98	-12.57	-5.68	5.73	30.00	-24.27
UNII-2A	5290	58	12.22	23.98	-11.76	-5.41	6.81	30.00	-23.19
	5530	106	11.57	23.98	-12.41	-5.50	6.07	30.00	-23.93
UNII-2C	5610	122	14.02	23.98	-9.96	-5.50	8.52	30.00	-21.48
	5690	138	14.01	23.98	-9.97	-5.50	8.51	30.00	-21.49
UNII-3	5775	155	14.05	30.00	-15.95	-4.80	9.25	36.00	-26.75
UNII-4	5885	171	14.03	-	-	-3.65	10.38	30.00	-19.62

Table 7-34. SISO ANT2 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 67 of 156

5GHz WIFI (80MHz 802.11ax SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	13.76	23.98	-10.22	-5.68	8.08	30.00	-21.92
UNII-2A	5290	58	14.23	23.98	-9.75	-5.41	8.82	30.00	-21.18
UNII-2C	5530	106	13.49	23.98	-10.49	-5.50	7.99	30.00	-22.01
	5610	122	14.12	23.98	-9.86	-5.50	8.62	30.00	-21.38
	5690	138	14.45	23.98	-9.53	-5.50	8.95	30.00	-21.05
UNII-3	5775	155	14.30	30.00	-15.70	-4.80	9.50	36.00	-26.50
UNII-4	5885	171	14.28	-	-	-3.65	10.63	30.00	-19.37

Table 7-35. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11be SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1	5210	42	11.45	23.98	-12.53	-5.68	5.77	30.00	-24.23
UNII-2A	5290	58	11.69	23.98	-12.29	-5.41	6.28	30.00	-23.72
UNII-2C	5530	106	11.54	23.98	-12.44	-5.50	6.04	30.00	-23.96
	5610	122	14.39	23.98	-9.59	-5.50	8.89	30.00	-21.11
	5690	138	14.27	23.98	-9.71	-5.50	8.77	30.00	-21.23
UNII-3	5775	155	14.11	30.00	-15.89	-4.80	9.31	36.00	-26.69
UNII-4	5885	171	14.16	-	-	-3.65	10.51	30.00	-19.49

Table 7-36. SISO ANT2 80MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ac SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1/2A	5250	50	13.72	23.98	-10.26	-5.41	8.31	30.00	-21.69
UNII-2C	5570	114	13.40	23.98	-10.58	-5.50	7.90	30.00	-22.10
UNII-3/4	5815	163	13.55	30.00	-16.45	-3.65	9.90	30.00	-20.10

Table 7-37. SISO ANT2 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ax SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1/2A	5250	50	13.27	23.98	-10.71	-5.41	7.86	30.00	-22.14
UNII-2C	5570	114	13.35	23.98	-10.63	-5.50	7.85	30.00	-22.15
UNII-3/4	5815	163	13.28	30.00	-16.72	-3.65	9.63	30.00	-20.37

Table 7-38. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11be SISO ANT2)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]						
UNII-1/2A	5250	50	13.10	23.98	-10.88	-5.41	7.69	30.00	-22.31
UNII-2C	5570	114	13.14	23.98	-10.84	-5.50	7.64	30.00	-22.36
UNII-3/4	5815	163	13.08	30.00	-16.92	-3.65	9.43	30.00	-20.57

Table 7-39. SISO ANT2 160MHz BW 802.11be (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 68 of 156

MIMO Maximum Conducted Output Power Measurements

5GHz WIFI (20MHz 802.11a MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	16.22	16.54	19.39	23.98	-4.59	-2.33	17.06	30.00	-12.94
	5200	40	17.45	17.68	20.58	23.98	-3.40	-2.33	18.25	30.00	-11.75
	5220	44	17.16	17.83	20.52	23.98	-3.46	-2.33	18.19	30.00	-11.81
	5240	48	17.03	17.79	20.44	23.98	-3.54	-2.33	18.11	30.00	-11.89
UNII-2A	5260	52	17.09	17.69	20.41	23.98	-3.57	-1.26	19.15	30.00	-10.85
	5280	56	17.06	17.63	20.36	23.98	-3.62	-1.26	19.10	30.00	-10.90
	5300	60	17.04	17.68	20.38	23.98	-3.60	-1.26	19.12	30.00	-10.88
	5320	64	16.41	16.93	19.69	23.98	-4.29	-1.26	18.43	30.00	-11.57
UNII-2C	5500	100	17.01	17.77	20.42	23.98	-3.56	-1.63	18.79	30.00	-11.21
	5600	120	17.42	17.70	20.57	23.98	-3.41	-1.63	18.94	30.00	-11.06
	5620	124	17.25	17.63	20.45	23.98	-3.53	-1.63	18.82	30.00	-11.18
	5720	144	17.03	17.77	20.43	23.98	-3.55	-1.63	18.80	30.00	-11.20
UNII-3	5745	149	17.08	17.63	20.37	30.00	-9.63	-1.13	19.24	36.00	-16.76
	5785	157	17.35	17.88	20.63	30.00	-9.37	-1.13	19.50	36.00	-16.50
	5825	165	17.42	17.96	20.71	30.00	-9.29	-1.13	19.58	36.00	-16.42
UNII-4	5845	169	17.39	17.97	20.70	-	-	-1.23	19.47	30.00	-10.53
	5865	173	17.50	17.82	20.67	-	-	-1.23	19.44	30.00	-10.56
	5885	177	17.04	17.30	20.18	-	-	-1.23	18.95	30.00	-11.05

Table 7-40. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11n MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	16.50	16.69	19.61	23.98	-4.37	-2.33	17.28	30.00	-12.72
	5200	40	17.17	17.32	20.26	23.98	-3.72	-2.33	17.93	30.00	-12.07
	5220	44	17.02	17.57	20.31	23.98	-3.67	-2.33	17.98	30.00	-12.02
	5240	48	17.08	17.51	20.31	23.98	-3.67	-2.33	17.98	30.00	-12.02
UNII-2A	5260	52	17.07	17.73	20.42	23.98	-3.56	-1.26	19.16	30.00	-10.84
	5280	56	17.28	17.64	20.47	23.98	-3.51	-1.26	19.21	30.00	-10.79
	5300	60	17.08	17.65	20.38	23.98	-3.60	-1.26	19.12	30.00	-10.88
	5320	64	16.12	16.45	19.30	23.98	-4.68	-1.26	18.04	30.00	-11.96
UNII-2C	5500	100	17.03	17.66	20.37	23.98	-3.61	-1.63	18.74	30.00	-11.26
	5620	124	17.20	17.65	20.44	23.98	-3.54	-1.63	18.81	30.00	-11.19
	5720	144	17.01	17.77	20.42	23.98	-3.56	-1.63	18.79	30.00	-11.21
UNII-3	5745	149	17.02	17.62	20.34	30.00	-9.66	-1.13	19.21	36.00	-16.79
	5785	157	17.18	17.92	20.58	30.00	-9.42	-1.13	19.45	36.00	-16.55
	5825	165	17.07	17.98	20.56	30.00	-9.44	-1.13	19.43	36.00	-16.57
UNII-4	5845	169	17.13	17.92	20.55	-	-	-1.23	19.32	30.00	-10.68
	5865	173	17.19	17.89	20.56	-	-	-1.23	19.33	30.00	-10.67
	5885	177	17.27	17.99	20.66	-	-	-1.23	19.43	30.00	-10.57

Table 7-41. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	16.46	16.73	19.61	23.98	-4.37	-2.33	17.28	30.00	-12.72
	5200	40	17.17	17.33	20.26	23.98	-3.72	-2.33	17.93	30.00	-12.07
	5220	44	17.07	17.54	20.32	23.98	-3.66	-2.33	17.99	30.00	-12.01
	5240	48	17.06	17.46	20.27	23.98	-3.71	-2.33	17.94	30.00	-12.06
UNII-2A	5260	52	17.04	17.74	20.41	23.98	-3.57	-1.26	19.15	30.00	-10.85
	5280	56	17.29	17.61	20.46	23.98	-3.52	-1.26	19.20	30.00	-10.80
	5300	60	17.01	17.63	20.34	23.98	-3.64	-1.26	19.08	30.00	-10.92
	5320	64	16.07	16.43	19.26	23.98	-4.72	-1.26	18.00	30.00	-12.00
UNII-2C	5500	100	17.04	17.73	20.41	23.98	-3.57	-1.63	18.78	30.00	-11.22
	5600	120	17.37	17.66	20.53	23.98	-3.45	-1.63	18.90	30.00	-11.10
	5620	124	17.16	17.57	20.38	23.98	-3.60	-1.63	18.75	30.00	-11.25
	5720	144	17.04	17.79	20.44	23.98	-3.54	-1.63	18.81	30.00	-11.19
UNII-3	5745	149	17.03	17.99	20.55	30.00	-9.45	-1.13	19.42	36.00	-16.58
	5785	157	17.18	17.93	20.58	30.00	-9.42	-1.13	19.45	36.00	-16.55
	5825	165	17.02	17.99	20.54	30.00	-9.46	-1.13	19.41	36.00	-16.59
	5845	169	17.14	17.93	20.56	-	-	-1.23	19.33	30.00	-10.67
UNII-4	5865	173	17.16	17.92	20.57	-	-	-1.23	19.34	30.00	-10.66
	5885	177	17.34	17.99	20.69	-	-	-1.23	19.46	30.00	-10.54

Table 7-42. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 69 of 156

5GHz WIFI (20MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	15.21	15.22	18.23	23.98	-5.75	-2.33	15.90	30.00	-14.10
	5200	40	15.35	15.32	18.35	23.98	-5.63	-2.33	16.02	30.00	-13.98
	5220	44	15.10	15.48	18.30	23.98	-5.68	-2.33	15.97	30.00	-14.03
	5240	48	15.41	15.96	18.70	23.98	-5.28	-2.33	16.37	30.00	-13.63
UNII-2A	5260	52	15.26	15.77	18.53	23.98	-5.45	-1.26	17.27	30.00	-12.73
	5280	56	15.43	15.74	18.60	23.98	-5.38	-1.26	17.34	30.00	-12.66
	5300	60	15.46	15.84	18.66	23.98	-5.32	-1.26	17.40	30.00	-12.60
	5320	64	15.26	15.49	18.39	23.98	-5.59	-1.26	17.13	30.00	-12.87
UNII-2C	5500	100	15.11	15.84	18.50	23.98	-5.48	-1.63	16.87	30.00	-13.13
	5600	120	15.01	15.35	18.19	23.98	-5.79	-1.63	16.56	30.00	-13.44
	5620	124	15.41	15.85	18.65	23.98	-5.33	-1.63	17.02	30.00	-12.98
	5720	144	15.05	15.96	18.54	23.98	-5.44	-1.63	16.91	30.00	-13.09
UNII-3	5745	149	15.06	15.69	18.40	30.00	-11.60	-1.13	17.27	36.00	-18.73
	5785	157	15.01	15.47	18.26	30.00	-11.74	-1.13	17.13	36.00	-18.87
	5825	165	15.01	15.59	18.32	30.00	-11.68	-1.13	17.19	36.00	-18.81
UNII-4	5845	169	15.03	15.55	18.31	-	-	-1.23	17.08	30.00	-12.92
	5865	173	15.04	15.52	18.30	-	-	-1.23	17.07	30.00	-12.93
	5885	177	15.17	15.45	18.32	-	-	-1.23	17.09	30.00	-12.91

Table 7-43. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	180	36	15.35	15.60	18.49	23.98	-5.49	-2.33	16.16	30.00	-13.84
	200	40	15.56	15.76	18.67	23.98	-5.31	-2.33	16.34	30.00	-13.66
	220	44	15.26	15.93	18.62	23.98	-5.36	-2.33	16.29	30.00	-13.71
	240	48	15.04	15.84	18.47	23.98	-5.51	-2.33	16.14	30.00	-13.86
UNII-2A	260	52	15.41	15.99	18.72	23.98	-5.26	-1.26	17.46	30.00	-12.54
	280	56	15.11	15.54	18.34	23.98	-5.64	-1.26	17.08	30.00	-12.92
	300	60	15.05	15.57	18.33	23.98	-5.65	-1.26	17.07	30.00	-12.93
	320	64	15.43	15.77	18.61	23.98	-5.37	-1.26	17.35	30.00	-12.65
UNII-2C	500	100	15.38	15.98	18.70	23.98	-5.28	-1.63	17.07	30.00	-12.93
	600	120	15.28	15.64	18.47	23.98	-5.51	-1.63	16.84	30.00	-13.16
	620	124	15.08	15.54	18.33	23.98	-5.65	-1.63	16.70	30.00	-13.30
	720	144	15.02	15.72	18.39	23.98	-5.59	-1.63	16.76	30.00	-13.24
UNII-3	745	149	15.08	15.99	18.57	30.00	-11.43	-2.61	15.96	36.00	-20.04
	785	157	15.13	15.83	18.50	30.00	-11.50	-2.61	15.90	36.00	-20.10
	825	165	15.06	15.90	18.51	30.00	-11.49	-2.61	15.90	36.00	-20.10
UNII-4	845	169	15.06	15.83	18.47	-	-	-1.23	17.24	30.00	-12.76
	865	173	15.17	15.80	18.51	-	-	-1.23	17.27	30.00	-12.73
	885	177	15.29	15.76	18.54	-	-	-1.23	17.31	30.00	-12.69

Table 7-44. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11n MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	13.51	13.64	16.59	23.98	-7.39	-2.33	14.26	30.00	-15.74
	5230	46	15.20	15.78	18.51	23.98	-5.47	-2.33	16.18	30.00	-13.82
UNII-2A	5270	54	15.02	15.52	18.29	23.98	-5.69	-1.26	17.03	30.00	-12.97
	5310	62	13.51	13.86	16.70	23.98	-7.28	-1.26	15.44	30.00	-14.56
UNII-2C	5510	102	13.59	13.93	16.77	23.98	-7.21	-1.63	15.14	30.00	-14.86
	5590	118	15.16	15.69	18.44	23.98	-5.54	-1.63	16.81	30.00	-13.19
	5630	126	15.01	15.54	18.29	23.98	-5.69	-1.63	16.66	30.00	-13.34
	5710	142	15.02	15.98	18.54	23.98	-5.44	-1.63	16.91	30.00	-13.09
UNII-3	5755	151	15.05	15.95	18.53	30.00	-11.47	-1.13	17.40	36.00	-18.60
	5795	159	15.04	15.79	18.44	30.00	-11.56	-1.13	17.31	36.00	-18.69
UNII-4	5835	167	15.03	15.97	18.54	-	-	-1.13	17.41	30.00	-12.59
	5875	175	15.12	15.89	18.53	-	-	-1.23	17.30	30.00	-12.70

Table 7-45. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 70 of 156

5GHz WIFI (40MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	15.54	15.62	18.59	23.98	-5.39	-2.33	16.26	30.00	-13.74
	5230	46	15.23	15.81	18.54	23.98	-5.44	-2.33	16.21	30.00	-13.79
UNII-2A	5270	54	15.05	15.55	18.32	23.98	-5.66	-1.26	17.06	30.00	-12.94
	5310	62	15.21	15.88	18.57	23.98	-5.41	-1.26	17.31	30.00	-12.69
UNII-2C	5510	102	15.32	15.99	18.68	23.98	-5.30	-1.63	17.05	30.00	-12.95
	5590	118	15.19	15.72	18.47	23.98	-5.51	-1.63	16.84	30.00	-13.16
	5630	126	15.04	15.57	18.32	23.98	-5.66	-1.63	16.69	30.00	-13.31
	5710	142	15.05	15.98	18.55	23.98	-5.43	-1.63	16.92	30.00	-13.08
UNII-3	5755	151	15.08	15.98	18.56	30.00	-11.44	-1.13	17.43	36.00	-18.57
	5795	159	15.07	15.82	18.47	30.00	-11.53	-1.13	17.34	36.00	-18.66
UNII-4	5835	167	15.06	15.89	18.51	-	-	-1.13	17.38	30.00	-12.62
	5875	175	15.15	15.92	18.56	-	-	-1.23	17.33	30.00	-12.67

Table 7-46. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	13.19	13.39	16.30	23.98	-7.68	-2.33	13.97	30.00	-16.03
	5230	46	15.47	15.99	18.75	23.98	-5.23	-2.33	16.42	30.00	-13.58
UNII-2A	5270	54	15.33	15.94	18.66	23.98	-5.32	-1.26	17.40	30.00	-12.60
	5310	62	15.30	15.88	18.61	23.98	-5.37	-1.26	17.35	30.00	-12.65
UNII-2C	5510	102	15.04	15.95	18.53	23.98	-5.45	-1.63	16.90	30.00	-13.10
	5590	118	15.51	15.98	18.76	23.98	-5.22	-1.63	17.13	30.00	-12.87
	5630	126	15.34	15.86	18.62	23.98	-5.36	-1.63	16.99	30.00	-13.01
	5710	142	15.04	15.99	18.55	23.98	-5.43	-1.63	16.92	30.00	-13.08
UNII-3	5755	151	15.05	15.81	18.46	30.00	-11.54	-1.13	17.33	36.00	-18.67
	5795	159	15.09	15.69	18.41	30.00	-11.59	-1.13	17.28	36.00	-18.72
UNII-4	5835	167	15.08	15.77	18.45	-	-	-1.13	17.32	30.00	-12.68
	5875	175	15.08	15.78	18.45	-	-	-1.23	17.22	30.00	-12.78

Table 7-47. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	190	38	13.58	13.82	16.71	23.98	-7.27	-2.33	14.38	30.00	-15.62
	230	46	15.27	15.99	18.66	23.98	-5.32	-2.33	16.33	30.00	-13.67
UNII-2A	270	54	15.18	15.80	18.51	23.98	-5.47	-1.26	17.25	30.00	-12.75
	310	62	15.11	15.77	18.46	23.98	-5.52	-1.26	17.20	30.00	-12.80
UNII-2C	510	102	15.01	15.74	18.40	23.98	-5.58	-1.63	16.77	30.00	-13.23
	590	118	15.33	15.93	18.65	23.98	-5.33	-1.63	17.02	30.00	-12.98
	630	126	15.22	15.77	18.51	23.98	-5.47	-1.63	16.88	30.00	-13.12
	710	142	15.04	15.92	18.51	23.98	-5.47	-1.63	16.88	30.00	-13.12
UNII-3	755	151	15.08	15.75	18.44	30.00	-11.56	-2.61	15.83	36.00	-20.17
	795	159	15.04	15.55	18.31	30.00	-11.69	-2.61	15.70	36.00	-20.30
UNII-4	835	167	15.07	15.62	18.36	-	-	-1.23	17.13	30.00	-12.87
	875	175	15.04	15.66	18.37	-	-	-1.23	17.14	30.00	-12.86

Table 7-48. MIMO 40MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
	5210	42	11.01	11.85	14.46	23.98	-9.52	-2.33	12.13	30.00	-17.87
A	5290	58	12.49	12.98	15.75	23.98	-8.23	-1.26	14.49	30.00	-15.51
UNII-2C	5530	106	11.03	11.48	14.27	23.98	-9.71	-1.63	12.64	30.00	-17.36
	5610	122	14.24	14.62	17.44	23.98	-6.54	-1.63	15.81	30.00	-14.19
	5690	138	14.06	14.58	17.34	23.98	-6.64	-1.63	15.71	30.00	-14.29
	5775	155	14.09	14.90	17.52	30.00	-12.48	-1.13	16.39	36.00	-19.61
	5885	171	14.25	14.86	17.58	-	-	-1.13	16.45	30.00	-13.55

Table 7-49. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMS936B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset		Page 71 of 156

5GHz WIFI (80MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
A	5210	42	13.33	13.95	16.66	23.98	-7.32	-2.33	14.33	30.00	-15.67
	5290	58	14.08	14.70	17.41	23.98	-6.57	-1.26	16.15	30.00	-13.85
UNII-2C	5530	106	13.43	13.98	16.72	23.98	-7.26	-1.63	15.09	30.00	-14.91
	5610	122	14.24	14.72	17.50	23.98	-6.48	-1.63	15.87	30.00	-14.13
	5690	138	14.06	14.59	17.34	23.98	-6.64	-1.63	15.71	30.00	-14.29
	5775	155	14.10	14.99	17.58	30.00	-12.42	-1.13	16.45	36.00	-19.55
	5885	171	14.38	14.98	17.70	-	-	-1.13	16.57	30.00	-13.43

Table 7-50. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-2C	210	42	10.72	10.99	13.87	23.98	-10.11	-2.33	11.54	30.00	-18.46
	290	58	12.07	12.41	15.25	23.98	-8.73	-1.26	13.99	30.00	-16.01
	530	106	11.35	11.69	14.53	23.98	-9.45	-1.63	12.90	30.00	-17.10
	610	122	14.46	14.90	17.70	23.98	-6.28	-1.63	16.07	30.00	-13.93
	690	138	14.03	14.89	17.49	23.98	-6.49	-1.63	15.86	30.00	-14.14
	775	155	14.07	14.74	17.43	30.00	-12.57	-2.61	14.82	36.00	-21.18
	885	171	14.07	14.70	17.41	-	-	-1.23	16.18	30.00	-13.82

Table 7-51. MIMO 80MHz BW 802.11be (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
J11-1/2A	5250	50	13.30	13.72	16.53	23.98	-7.45	-1.26	15.27	30.00	-14.73
N11-2C	5570	114	13.03	13.40	16.23	23.98	-7.75	-1.63	14.60	30.00	-15.40
N11-3/4	5815	163	13.05	13.55	16.32	30.00	-13.68	-1.13	15.19	30.00	-14.81

Table 7-52. MIMO 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
J11-1/2A	5250	50	13.51	13.94	16.74	23.98	-7.24	-1.26	15.48	30.00	-14.52
N11-2C	5570	114	13.01	13.77	16.42	23.98	-7.56	-1.63	14.79	30.00	-15.21
N11-3/4	5815	163	13.22	13.73	16.49	30.00	-13.51	-1.13	15.36	30.00	-14.64

Table 7-53. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
	250	50	13.32	13.73	16.54	23.98	-7.44	-1.26	15.28	30.00	-14.72
	570	114	13.01	13.57	16.31	23.98	-7.67	-1.63	14.68	30.00	-15.32
	815	163	13.05	13.53	16.31	30.00	-13.69	-1.23	15.08	30.00	-14.92

Table 7-54. MIMO 160MHz BW 802.11be (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Puncture Size	Average Conducted Power (dBm)												Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Dr. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]						
					Puncture Case																							
					90						93																	
					ANT1			ANT2			MIMO			ANT1									ANT2			MIMO		
					90	93	96	90	93	96	90	93	96	90	93	96							90	93	96			
1	5210	42	20MHz	13.66	14.37	17.04	13.52	14.18	16.87	13.63	14.23	16.95	23.98	-6.94	-2.33	14.71	30.0	-15.29										
2A	5210	58	20MHz	15.01	15.75	18.41	15.21	15.99	18.63	15.01	15.65	18.35	23.98	-5.35	-1.26	13.76	30.0	-17.24										
	5530	137	20MHz	13.72	14.49	17.13	13.60	14.43	17.05	13.65	14.49	17.10	23.98	-6.85	-1.63	15.50	30.0	-14.50										
2C	5610	122	20MHz	15.05	15.96	18.54	15.05	15.73	18.41	15.05	15.99	18.56	23.98	-5.42	-1.63	16.92	30.0	-13.08										
	5690	138	20MHz	15.05	15.60	18.34	15.07	15.90	18.52	15.04	15.60	18.34	23.98	-5.46	-1.63	16.38	30.0	-13.12										
3	5725	150	20MHz	15.01	15.90	18.49	15.02	15.82	18.44	15.02	15.90	18.49	30	-11.51	-2.61	15.89	36.0	-20.11										
4	5855	171	20MHz	15.37	15.99	18.70	15.20	15.92	18.59	15.32	15.95	18.66	-	-	-	17.47	30.0	-12.53										

Table 7-55. MIMO 80MHz BW 802.11be (UNII) Maximum Conducted Output Power – 20MHz Puncture

160MHz BW	Average Conducted Power (dBm)												Conducted Power Limit (dBm)	Conducted Power Margin (dBm)	Dr. Ant. Gain (dB)	Max e.i.r.p (dBm)	e.i.r.p Limit (dBm)	e.i.r.p Margin (dB)
	Puncture Case																	
	94																	
	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
1/2A	5250	50	40MHz	11.01	11.80	14.43	11.38	11.99	14.71	11.01	11.78	14.42	23.98	-9.27	-2.33	12.37	30.0	-17.63
2C	5570	114	40MHz	11.12	11.97	14.58	11.10	11.98	14.57	11.03	11.82	14.45	23.98	-9.40	-1.63	12.95	30.0	-17.05
3C	5815	163	40MHz	14.06	14.93	17.53	14.26	14.99	17.65	14.02	14.82	17.45	-	-	-1.23	16.42	30.0	-13.58

Table 7-56. MIMO 160MHz BW 802.11be (UNII) Maximum Conducted Output Power – 20MHz Puncture

160MHz BW	Average Conducted Power (dBm)															Conducted Power Limit [dBm]	Conducted Power Margin [dBm]	Dr. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]							
	Band	Freq [MHz]	Channel	Puncture Size	Puncture Case																							
					96									99								1098						
					ANT1			ANT2			MIMO			ANT1								ANT2			MIMO			
					ANT1			ANT2			MIMO			ANT1								ANT2			MIMO			
					ANT1			ANT2			MIMO			ANT1								ANT2			MIMO			
1/2A	5250	50	20MHz	11.05	11.75	14.42	11.07	11.60	14.35	11.02	11.65	14.36	23.98	-9.56	-2.33	12.09	30.0	-17.91										
2C	1114	20MHz	11.01	11.75	14.41	11.04	11.78	14.44	11.05	11.99	14.56	23.98	-9.42	-1.63	12.92	30.0	-17.08											
3/0	5815	63	20MHz	14.09	14.79	17.46	14.02	14.70	17.38	14.01	14.75	17.41	-	-	-	16.23	30.0	-13.77										

Table 7-57. MIMO 160MHz BW 802.11be (UNII) Maximum Conducted Output Power – 40MHz Puncture

FCC ID: A3LSMS936B		MEASUREMENT REPORT										Approved by: Technical Manager	
Test Report S/N: 1M2408260066-17.A3L		Test Dates: 09/03/2024 – 11/5/2024		EUT Type: Portable Handset								Page 72 of 156	

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 16.50 dBm for Antenna 1 and 16.69dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(16.50\text{dBm} + 16.69\text{dBm}) = (44.668 + 46.666\text{mW}) = 91.334\text{mW} = 19.61\text{dBm}$$

Sample e.i.r.p Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average MIMO conducted power was calculated to be 19.61dBm with directional gain of -2.33 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$19.61 \text{ dBm} + -2.33 \text{ dBi} = 17.28 \text{ dBm}$$

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 73 of 156

7.5 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density.

The output power density limits are as specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit
		FCC
UNII 1	5.15 – 5.25GHz	11dBm/MHz
UNII 2A	5.25 – 5.35GHz	
UNII 2C	5.47 – 5.725GHz	
UNII 3	5.725 – 5.850GHz	30dBm/500kHz
UNII 4	5.850 – 5.895GHz	14dBm/MHz e.i.r.p

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2 (Method SA-1)

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 74 of 156



Test Notes

1. All cases were investigated; a subset of the plots is included to represent relevant settings and measurements.

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 75 of 156

Summed MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna 1 PSD [dBm]	Antenna 2 PSD [dBm]	DCCF [dB]	MIMO Summed PSD [dBm]	PSD Limit [dBm]	Margin [dB]
Band 1	5180	36	a	7.79	5.94	0.28	10.25	11.00	-0.75
	5200	40	a	7.50	7.24	0.28	10.67	11.00	-0.33
	5240	48	a	7.88	5.39	0.28	10.10	11.00	-0.90
	5180	36	n	5.43	5.20	0.34	8.66	11.00	-2.34
	5200	40	n	6.84	6.98	0.34	10.26	11.00	-0.74
	5240	48	n	5.66	4.86	0.34	8.63	11.00	-2.37
	5180	36	be SU	3.12	-9.18	0.00	3.37	11.00	-7.63
	5200	40	be SU	6.86	6.82	0.00	9.85	11.00	-1.15
	5240	48	be SU	3.13	2.48	0.00	5.83	11.00	-5.17
	5190	38	n	3.54	3.28	0.33	6.75	11.00	-4.25
	5230	46	n	5.60	5.11	0.33	8.70	11.00	-2.30
	5190	38	be SU	3.82	3.25	0.00	6.55	11.00	-4.45
	5230	46	be SU	2.72	2.86	0.00	5.80	11.00	-5.20
	5210	42	ac	-4.37	-2.90	0.36	-0.20	11.00	-11.20
Band 1/2A	5210	42	be SU	-2.34	-2.83	0.00	0.43	11.00	-10.57
	5250	50	ac	-5.81	-6.22	0.35	-2.65	11.00	-13.65
Band 2A	5250	50	be SU	-4.43	-4.65	0.00	-1.52	11.00	-12.52
	5260	52	a	7.86	5.15	0.28	10.00	11.00	-1.00
	5280	56	a	5.68	4.76	0.28	8.53	11.00	-2.47
	5320	64	a	7.06	4.11	0.28	9.12	11.00	-1.88
	5260	52	n	5.78	4.45	0.34	8.51	11.00	-2.49
	5280	56	n	5.83	4.31	0.34	8.49	11.00	-2.51
	5320	64	n	4.82	3.56	0.34	7.59	11.00	-3.41
	5260	52	be SU	3.52	2.16	0.00	5.90	11.00	-5.10
	5280	56	be SU	3.18	1.92	0.00	5.61	11.00	-5.39
	5320	64	be SU	2.84	1.73	0.00	5.33	11.00	-5.67
	5270	54	n	4.09	5.08	0.33	7.96	11.00	-3.04
	5310	62	n	3.93	3.09	0.33	6.87	11.00	-4.13
	5270	54	be SU	6.21	4.87	0.00	8.60	11.00	-2.40
	5310	62	be SU	-4.20	2.59	0.00	3.41	11.00	-7.59
	5290	58	ac	-2.46	-0.99	0.36	1.71	11.00	-9.29
	5290	58	be SU	-1.50	-2.00	0.00	1.27	11.00	-9.73
Band 2C	5500	100	a	7.43	6.06	0.28	10.09	11.00	-0.91
	5600	120	a	6.85	6.21	0.28	9.83	11.00	-1.17
	5720	144	a	6.90	7.02	0.28	10.25	11.00	-0.75
	5500	100	n	5.34	5.49	0.34	8.76	11.00	-2.24
	5600	120	n	4.88	5.39	0.34	8.49	11.00	-2.51
	5720	144	n	4.93	6.43	0.34	9.10	11.00	-1.90
	5500	100	be SU	3.07	3.10	0.00	6.09	11.00	-4.91
	5600	120	be SU	2.34	3.43	0.00	5.93	11.00	-5.07
	5720	144	be SU	2.42	3.82	0.00	6.19	11.00	-4.81
	5510	102	n	2.63	1.61	0.33	5.49	11.00	-5.51
	5590	118	n	2.48	1.86	0.33	5.52	11.00	-5.48
	5710	142	n	2.62	1.78	0.33	5.56	11.00	-5.44
	5510	102	be SU	2.02	2.69	0.00	5.38	11.00	-5.62
	5590	118	be SU	2.08	2.37	0.00	5.23	11.00	-5.77
	5710	142	be SU	1.92	2.59	0.00	5.28	11.00	-5.72
	5530	106	ac	-3.42	-2.30	0.36	0.55	11.00	-10.45
	5610	122	ac	-3.08	-1.97	0.36	0.88	11.00	-10.12
	5690	138	ac	-2.68	-1.81	0.36	1.15	11.00	-9.85
	5530	106	be SU	-3.63	-1.94	0.00	0.31	11.00	-10.69
	5610	122	be SU	-3.56	-2.09	0.00	0.25	11.00	-10.75
	5690	138	be SU	-2.96	-1.80	0.00	0.67	11.00	-10.33
	5570	114	ac	-7.68	-6.14	0.35	-3.48	11.00	-14.48
	5570	114	be SU	-5.90	-6.32	0.00	-3.09	11.00	-14.09

Table 7-58. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 76 of 156

	Frequency [MHz]	Channel	802.11 MODE	Puncture Size [MHz]	Antenna 1 PSD [dBm]	Antenna 2 PSD [dBm]	MIMO Summed PSD [dBm]	Max PSD [dBm]	Margin [dB]
Band 1	5210	42	be	20	-3.41	-3.93	-0.65	11.00	-11.65
Band 1/2A	5250	50	be	40	-8.45	-9.17	-5.79	11.00	-16.79
Band 2A	5290	58	be	20	-2.27	-2.52	0.62	11.00	-10.38
Band 2C	5610	122	be	20	-3.58	-3.48	-0.52	11.00	-11.52
	5570	114	be	20	-9.30	-9.07	-6.17	11.00	-17.17

Table 7-59. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements – Puncture Cases

	Frequency [MHz]	Channel	802.11 MODE	Antenna 1 PSD [dBm]	Antenna 2 PSD [dBm]	MIMO Summed PSD [dBm]	Max PSD [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	4.04	3.98	7.30	30.00	-22.70
	5785	157	a	4.42	4.05	7.53	30.00	-22.47
	5825	165	a	4.79	3.96	7.68	30.00	-22.32
	5745	149	n	2.02	3.41	6.12	30.00	-23.88
	5785	157	n	2.32	3.47	6.29	30.00	-23.71
	5825	165	n	2.16	3.43	6.19	30.00	-23.81
	5745	149	be SU	-0.10	0.91	3.44	30.00	-26.56
	5785	157	be SU	0.04	1.12	3.62	30.00	-26.38
	5825	165	be SU	0.20	0.95	3.60	30.00	-26.40
	5755	151	n	-0.13	-0.94	2.83	30.00	-27.17
	5795	159	n	0.20	-0.90	3.03	30.00	-26.97
	5755	151	be SU	-0.75	-0.72	2.28	30.00	-27.72
	5795	159	be SU	-0.23	-0.31	2.74	30.00	-27.26
	5775	155	ac	-4.44	-4.80	-1.24	30.00	-31.24
	5775	155	be SU	-4.85	-4.56	-1.70	30.00	-31.70

Table 7-60. Band 3 MIMO Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Puncture Size [MHz]	Antenna 1 PSD [dBm]	Antenna 2 PSD [dBm]	MIMO Summed PSD [dBm]	Max PSD [dBm/500kHz]	Margin [dB]
Band 3	5775	155	be	20	-4.63	-4.81	-1.71	30.00	-31.71

Table 7-61. Band 3 MIMO Conducted Power Spectral Density Measurements – Punctured Cases

FCC ID: A3LSMS936B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset		Page 77 of 156

	Frequency [MHz]	Channel	802.11 MODE	Antenna 1 PSD [dBm]	Antenna 2 PSD [dBm]	MIMO Summed PSD [dBm]	Directional Antenna Gain [dBi]	DCCF [dB]	EIRP PSD [dBm]	EIRP PSD Limit [dBm]	Margin [dB]
nd 3/4	5845	169	a	7.42	6.68	10.08	-1.44	0.28	8.91	14.00	-5.09
Band 4	5865	173	a	6.99	6.69	9.85	-1.44	0.28	8.69	14.00	-5.31
	5885	177	a	5.48	4.47	8.01	-1.44	0.28	6.85	14.00	-7.15
nd 3/4	5845	169	n	5.36	6.05	8.73	-1.44	0.34	7.62	14.00	-6.38
Band 4	5865	173	n	4.99	6.24	8.67	-1.44	0.34	7.57	14.00	-6.43
	5885	177	n	5.17	4.17	7.71	-1.44	0.34	6.61	14.00	-7.39
nd 3/4	5845	169	be SU	3.01	3.91	6.49	-1.44	0.00	5.05	14.00	-8.95
Band 4	5865	173	be SU	3.24	3.88	6.58	-1.44	0.00	5.14	14.00	-8.86
	5885	177	be SU	3.43	3.54	6.49	-1.44	0.00	5.05	14.00	-8.95
nd 3/4	5835	167	n	3.41	2.71	6.08	-1.44	0.33	4.97	14.00	-9.03
and 4	5875	175	n	3.14	2.67	5.92	-1.44	0.33	4.81	14.00	-9.19
nd 3/4	5835	167	be SU	0.70	1.76	4.27	-1.44	0.00	2.83	14.00	-11.17
and 4	5875	175	be SU	2.30	2.88	5.61	-1.44	0.00	4.16	14.00	-9.84
Band 3/4	5855	171	ac	-1.72	-1.89	1.21	-1.44	0.36	0.12	14.00	-13.88
	5855	171	be SU	-1.45	-1.81	1.39	-1.44	0.00	-0.06	14.00	-14.06
	5815	163	ac	-5.59	-5.37	-2.47	-1.44	0.35	-3.56	14.00	-17.56
	5815	163	be SU	-5.15	-4.99	-2.05	-1.44	0.00	-3.50	14.00	-17.50


Table 7-62. Bands 3/4 MIMO Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Puncture Size [MHz]	Antenna 1 PSD [dBm]	Antenna 2 PSD [dBm]	MIMO Summed PSD [dBm]	Directional Antenna Gain [dBi]	EIRP PSD [dBm]	Max EIRP PSD [dBm]	Margin [dB]
Band 3/4	5855	171	be	20	-1.19	-1.82	1.52	-1.44	0.07	14.00	-13.93
	5815	163	be	40	-5.93	-6.17	-3.04	-1.44	-4.48	14.00	-18.48


Table 7-63. Bands 3/4 MIMO Conducted Power Spectral Density Measurements – Punctured Cases

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 78 of 156

7.5.1 MIMO Antenna-1 Power Spectral Density Measurements

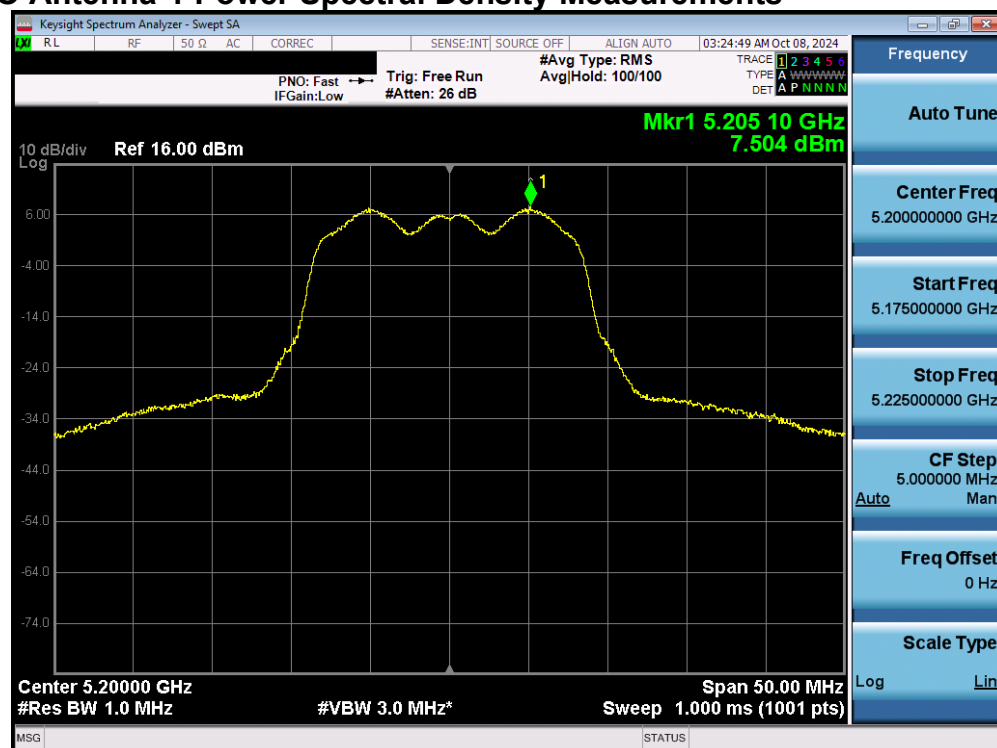


Plot 7-62. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11a (UNII Band 1) – Ch. 40)

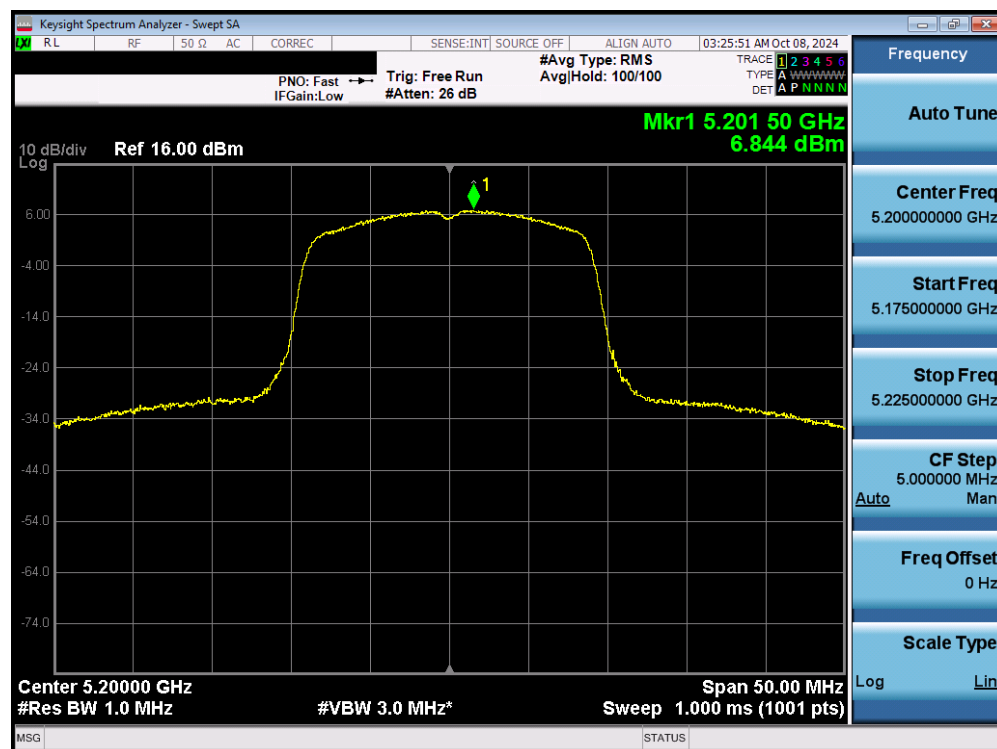


Plot 7-63. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11n (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 79 of 156

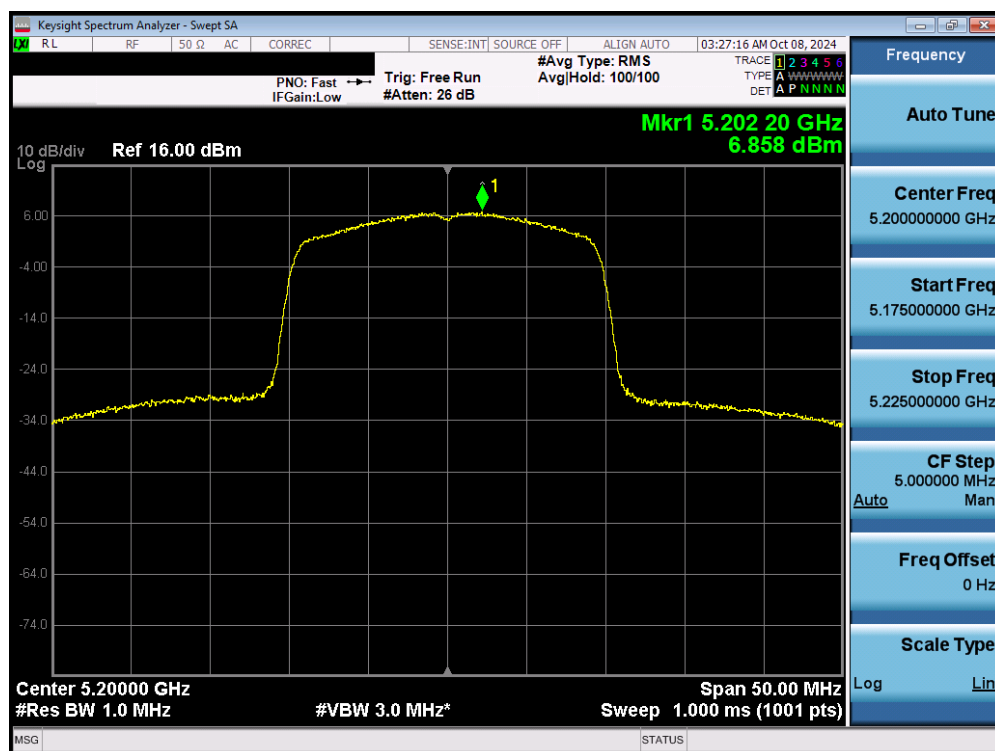


Plot 7-64. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (UNII Band 1) – Ch. 40)

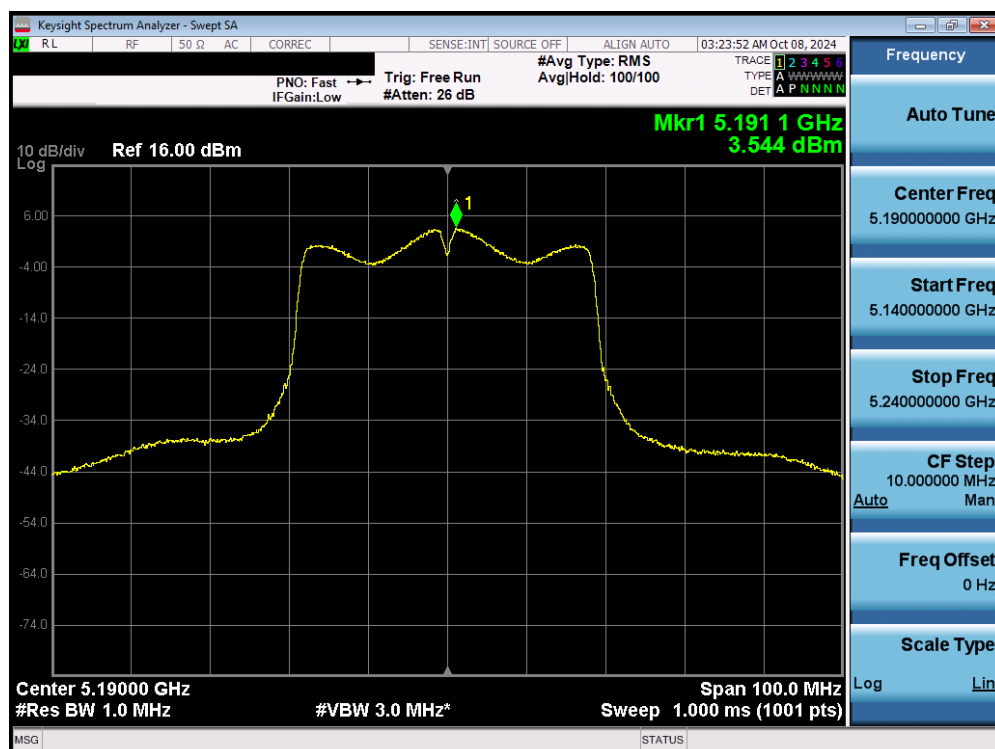


Plot 7-65. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 80 of 156

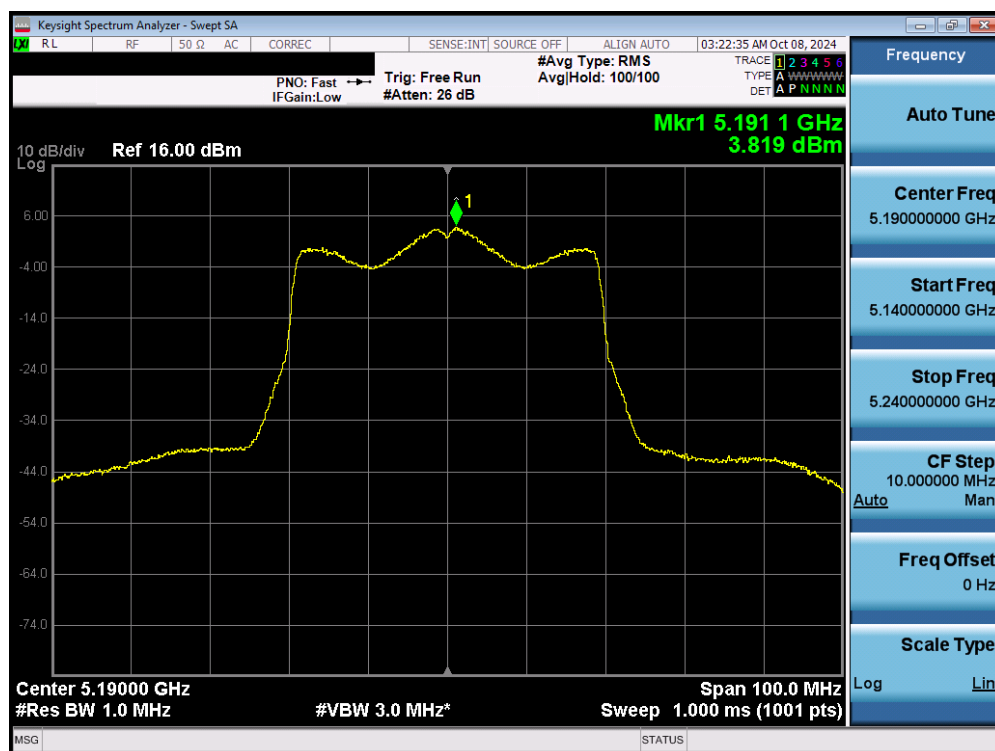

Plot 7-66. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (UNII Band 1) – Ch. 38)

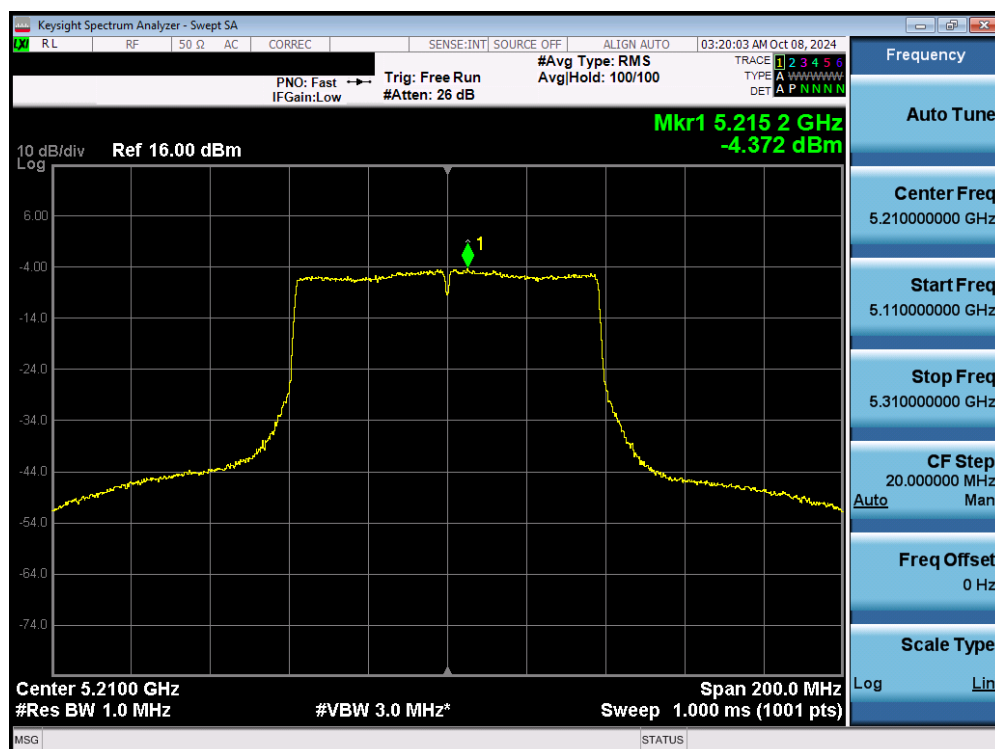

Plot 7-67. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260066-17.A3L	Test Dates: 09/03/2024 – 11/5/2024	EUT Type: Portable Handset	Page 81 of 156