



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>

PART 22 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

09/06/2024 - 11/08/2024

Test Report Issue Date:

11/10/2024

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2408260069-04.A3L

FCC ID:

A3LSMS938B

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S938B/DS

Additional Model:

SM-S938B

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

22

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 1 of 102

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE EMISSION DESIGNATORS	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	41
7.4	Band Edge Emissions at Antenna Terminal.....	60
7.5	Radiated Power (ERP)	72
7.6	Radiated Spurious Emissions Measurements	78
7.7	Frequency Stability / Temperature Variation	97
8.0	CONCLUSION.....	102

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 2 of 102

PART 22 MEASUREMENT REPORT

Antenna-1								
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	824.2 - 848.8	0.941	29.74	1.544	31.89	246KGXW
EDGE	N/A	8-PSK	824.2 - 848.8	0.181	22.59	0.298	24.74	240KG7W
WCDMA	N/A	Spread Spectrum	826.4 - 846.6	0.093	19.70	0.153	21.85	4M15F9W
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.120	20.80	0.197	22.95	13M5G7D
		16QAM	831.5 - 841.5	0.101	20.02	0.165	22.17	13M5W7D
	10 MHz	QPSK	829.0 - 844.0	0.119	20.76	0.196	22.91	9M01G7D
		16QAM	829.0 - 844.0	0.104	20.19	0.171	22.34	9M01W7D
	5 MHz	QPSK	826.5 - 846.5	0.120	20.80	0.197	22.95	4M50G7D
		16QAM	826.5 - 846.5	0.108	20.33	0.177	22.48	4M50W7D
	3 MHz	QPSK	825.5 - 847.5	0.123	20.89	0.201	23.04	2M71G7D
		16QAM	825.5 - 847.5	0.105	20.20	0.172	22.35	2M71W7D
	1.4 MHz	QPSK	824.7 - 848.3	0.123	20.89	0.201	23.04	1M11G7D
		16QAM	824.7 - 848.3	0.103	20.11	0.168	22.26	1M10W7D
NR Band n26/5	20 MHz	$\pi/2$ BPSK	834.0 - 839.0	0.110	20.40	0.180	22.55	18M0G7D
		QPSK	834.0 - 839.0	0.106	20.25	0.174	22.40	19M0G7D
		16QAM	834.0 - 839.0	0.082	19.14	0.135	21.29	19M0W7D
	15 MHz	$\pi/2$ BPSK	831.5 - 841.5	0.111	20.46	0.183	22.61	13M5G7D
		QPSK	831.5 - 841.5	0.110	20.41	0.180	22.56	14M2G7D
		16QAM	831.5 - 841.5	0.084	19.24	0.138	21.39	14M2W7D
	10 MHz	$\pi/2$ BPSK	829.0 - 844.0	0.111	20.44	0.181	22.59	9M00G7D
		QPSK	829.0 - 844.0	0.110	20.41	0.180	22.56	9M35G7D
		16QAM	829.0 - 844.0	0.085	19.30	0.140	21.45	9M35W7D
	5 MHz	$\pi/2$ BPSK	826.5 - 846.5	0.114	20.58	0.188	22.73	4M51G7D
		QPSK	826.5 - 846.5	0.110	20.41	0.180	22.56	4M53G7D
		16QAM	826.5 - 846.5	0.086	19.36	0.141	21.51	4M58W7D

Antenna-2								
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	824.2 - 848.8	0.438	26.41	0.719	28.56	245KGXW
EDGE	N/A	8-PSK	824.2 - 848.8	0.145	21.61	0.237	23.76	240KG7W
WCDMA	N/A	Spread Spectrum	826.4 - 846.6	0.066	18.20	0.108	20.35	4M15F9W
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.058	17.61	0.095	19.76	13M5G7D
		16QAM	831.5 - 841.5	0.044	16.48	0.073	18.63	13M6W7D
	10 MHz	QPSK	829.0 - 844.0	0.056	17.47	0.092	19.62	9M03G7D
		16QAM	829.0 - 844.0	0.046	16.60	0.075	18.75	9M02W7D
	5 MHz	QPSK	826.5 - 846.5	0.057	17.52	0.093	19.67	4M51G7D
		16QAM	826.5 - 846.5	0.047	16.71	0.077	18.86	4M53W7D
	3 MHz	QPSK	825.5 - 847.5	0.057	17.54	0.093	19.69	2M71G7D
		16QAM	825.5 - 847.5	0.046	16.63	0.076	18.78	2M71W7D
	1.4 MHz	QPSK	824.7 - 848.3	0.056	17.49	0.092	19.64	1M10G7D
		16QAM	824.7 - 848.3	0.045	16.51	0.073	18.66	1M10W7D
NR Band n26/5	20 MHz	$\pi/2$ BPSK	834.0 - 839.0	0.043	16.29	0.070	18.44	18M0G7D
		QPSK	834.0 - 839.0	0.042	16.25	0.069	18.40	19M0G7D
		16QAM	834.0 - 839.0	0.033	15.12	0.053	17.27	19M1W7D
	15 MHz	$\pi/2$ BPSK	831.5 - 841.5	0.045	16.52	0.074	18.67	13M5G7D
		QPSK	831.5 - 841.5	0.043	16.35	0.071	18.50	14M2G7D
		16QAM	831.5 - 841.5	0.037	15.63	0.060	17.78	14M2W7D
	10 MHz	$\pi/2$ BPSK	829.0 - 844.0	0.045	16.54	0.074	18.69	9M01G7D
		QPSK	829.0 - 844.0	0.044	16.42	0.072	18.57	9M36G7D
		16QAM	829.0 - 844.0	0.034	15.38	0.057	17.53	9M37W7D
	5 MHz	$\pi/2$ BPSK	826.5 - 846.5	0.045	16.54	0.074	18.69	4M51G7D
		QPSK	826.5 - 846.5	0.044	16.40	0.072	18.55	4M51G7D
		16QAM	826.5 - 846.5	0.035	15.39	0.057	17.54	4M58W7D

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset		Page 3 of 102

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. (“MD”)

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 4 of 102

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS938B**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

Test Device Serial No.: 0670R, 0741M, 0734M, 0286M, 0334M, 0099M, 0084M, 0081M

2.2 Device Capabilities

This device contains the following capabilities:

800/1900 GSM/GPRS/EDGE, GSM/GPRS/EDGE, WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, WLAN, UNII, Bluetooth (1x, EDR, LE), NFC, WPT, UWB

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-P2400 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

Band	Ant1	Ant2
GSM/GPRS	Ant A	Ant E
WCDMA	Ant A	Ant E
LTE Band 26/5	Ant A	Ant E
NR Band n26/5	Ant A	Ant E

Table 2-1. Antenna Naming Convention

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S938BXXU0AXHN installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 5 of 102

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 6 of 102

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget – MD

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 7 of 102

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP2
-	AP1	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP1
-	ETS	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS
-	LTx1	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx1
-	LTx4	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx4
-	LTx5	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx5
Agilent	N9030A	50GHz PXA Signal Analyzer	4/23/2024	Annual	4/23/2025	US51350301
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Emco	3116	Horn Antenna (18 - 40GHz)	7/5/2023	Triennial	7/5/2025	9203-2178
Espec	ESX-2CA	Environmental Chamber	9/26/2024	Annual	9/26/2026	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/29/2023	Biennial	3/29/2025	128337
ETS Lindgren	3164-10	Quad Ridge Horn 400MHz - 10000MHz	7/13/2023	Biennial	7/13/2025	00166283
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	2/29/2024	Annual	3/1/2025	MY55410501
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	3/8/2024	Annual	3/8/2025	103187
Sunol	JB6	LB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816

Table 5-1. Test Equipment Calibration Table – MD

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 8 of 102

6.0 SAMPLE EMISSION DESIGNATORS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 9 of 102

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS938B
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/WCDMA/NR/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.3, 7.4
	Peak-to-Average Ratio	N/A	≤ 13 dB	PASS	Sections 7.5
	Frequency Stability	2.1055, 22.355	The carrier frequency of the transmitter must be maintained within the 2.5ppm	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	$> 43 + 10 \log_{10} (P[\text{Watts}])$ for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.2.2.
- 5) No conducted powers were included in the report. For the conducted power measurements please see the **RF Exposure Report**.
- 6) Data was leveraged from model SM-S938U for the certification of SM-S938B/DS. See Table 7-2 for spot-check results.


FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: SM-S938U	Variant Model: SM-S938B	Deviation (dB)	Max Deviation (dB)	Pass/Fail
22	Conducted Output Power	Low Ch. 5MHz, 826.5MHz, QPSK, Ant A	dBm	N/A	24.81	24.79	-0.02	1	PASS
	Occupied Bandwidth	Mid Ch, 15MHz, QPSK, Ant A	dBm	N/A	13.54	13.63	-	N/A	PASS
	ERP	Mid Ch., 836.5MHz, QPSK, Ant A	dBm	>30	20.89	20.77	-0.12	3	PASS
	RSE	Mid Ch., 2509.5MHz, Ant E	dBm	-13	-48.18	-48.98	-0.80	3	PASS

Table 7-2. Summary of Spot-Checks

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset		Page 10 of 102

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
5 MHz	QPSK	26815	826.5	1 / 0	24.79
		26915	836.5	1 / 12	24.42
		27015	846.5	1 / 24	24.32
	16QAM	27015	846.5	1 / 24	23.81

Table 7-3. Conducted Output Power Measurements (Spot-check)

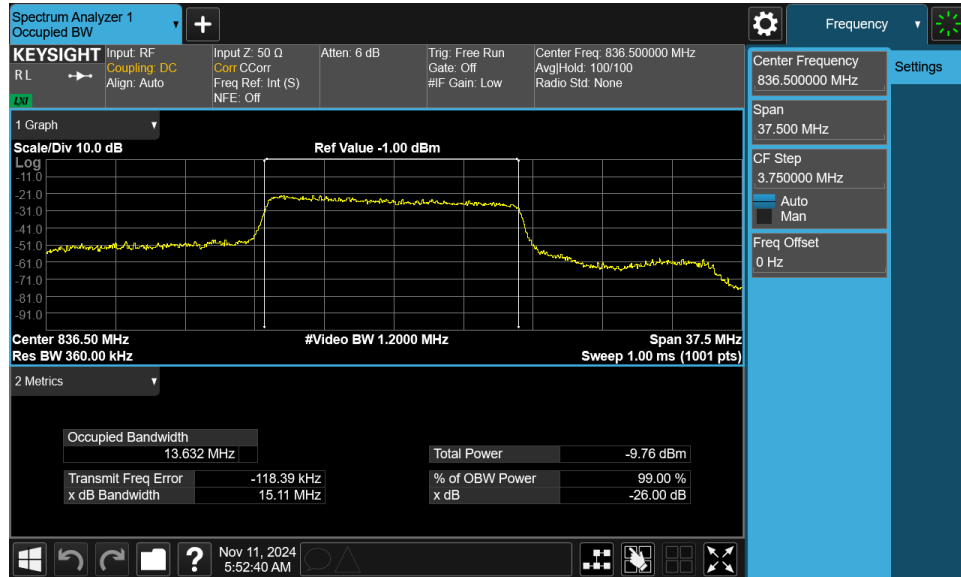

Plot 7-1. Occupied Bandwidth (Spot-check) – LTE Band 13 Ant 1

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
3 MHz	QPSK	836.50	H	221	241	1.54	1 / 0	21.38	20.77	0.119	38.45	-17.68

Table 7-4. ERP Measurements (Spot-check)

Bandwidth (MHz):	15
Frequency (MHz):	836.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2509.50	V	129	265	-56.78	-3.94	46.28	-48.98	-13.00	-35.98

Table 7-5. Radiated Spurious Measurements (Spot-check)

- Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.
- All test cases were performed to verify the variant EUT is still in compliance with the spot checked results to the reference device and was performed using the guidance of ANSI C63.26-2015.

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset		Page 11 of 102

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

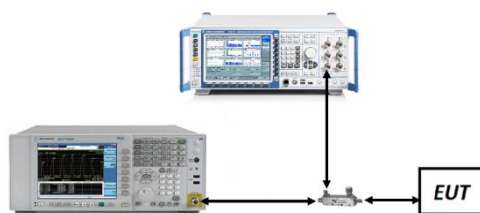


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.



FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 12 of 102

Mode	Bandwidth	Modulation	OBW [MHz]
GSM-Cell	N/A	GMSK	0.246
GSM-Cell Edge		8-PSK	0.240
WCDMA-Cell		Spread Spectrum	4.15
LTE-B26-5	15MHz	QPSK	13.54
		16QAM	13.51
	10MHz	QPSK	9.01
		16QAM	9.01
	5 MHz	QPSK	4.50
		16QAM	4.50
	3 MHz	QPSK	2.71
		16QAM	2.71
	1.4 MHz	QPSK	1.11
		16QAM	1.10
NR-n26-5	20 MHz	$\pi/2$ BPSK	17.98
		QPSK	18.98
		16QAM	19.02
	15 MHz	$\pi/2$ BPSK	13.51
		QPSK	14.20
		16QAM	14.20
	10 MHz	$\pi/2$ BPSK	9.00
		QPSK	9.35
		16QAM	9.35
	5 MHz	$\pi/2$ BPSK	4.51
		QPSK	4.53
		16QAM	4.58

Table 7-6. Occupied Bandwidth Results – Ant1


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 13 of 102

GPRS Cell – Ant1

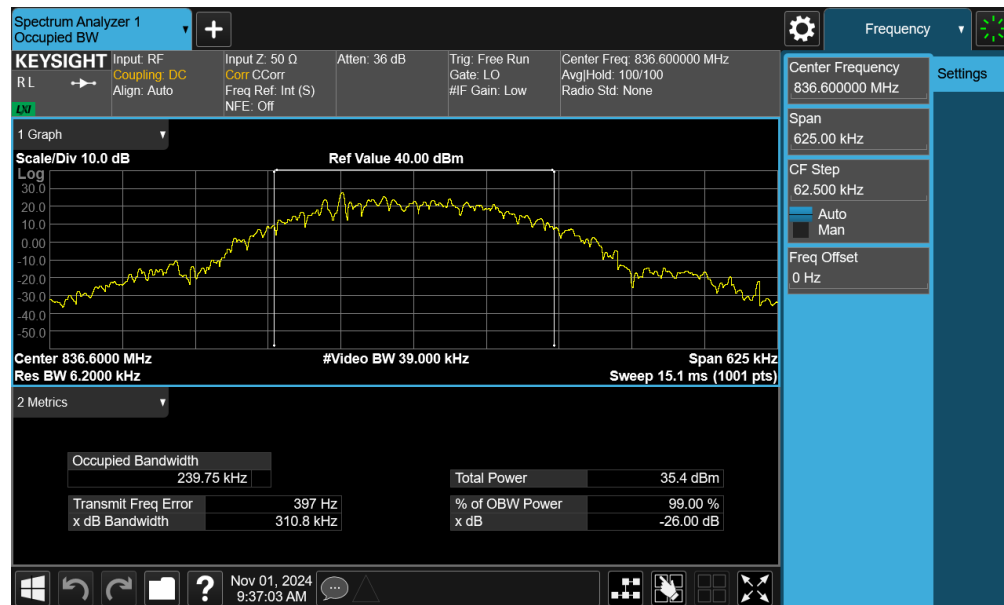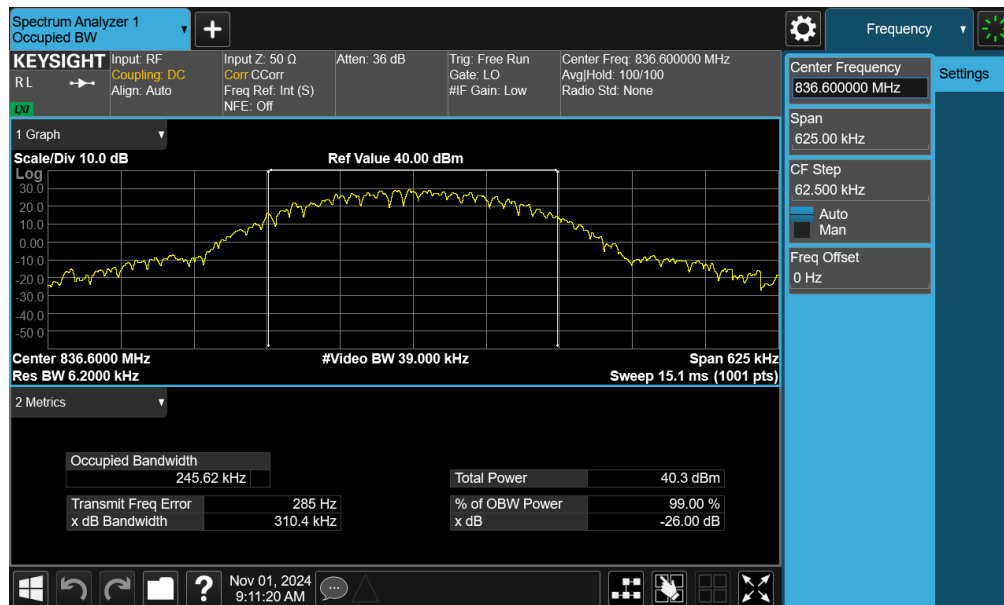

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 14 of 102

WCDMA Cell – Ant1

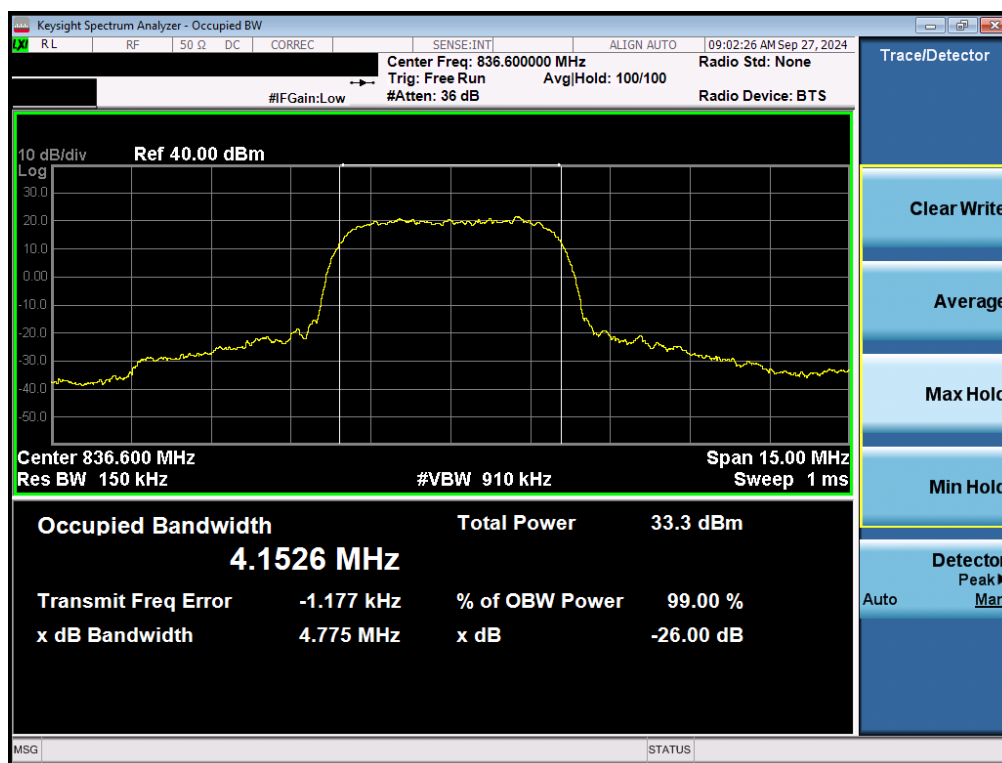


Plot 7-4. Occupied Bandwidth Plot (WCDMA, Ch. 4183 – Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 15 of 102

LTE Band 26/5 – Ant1




Plot 7-5. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB - Ant1)

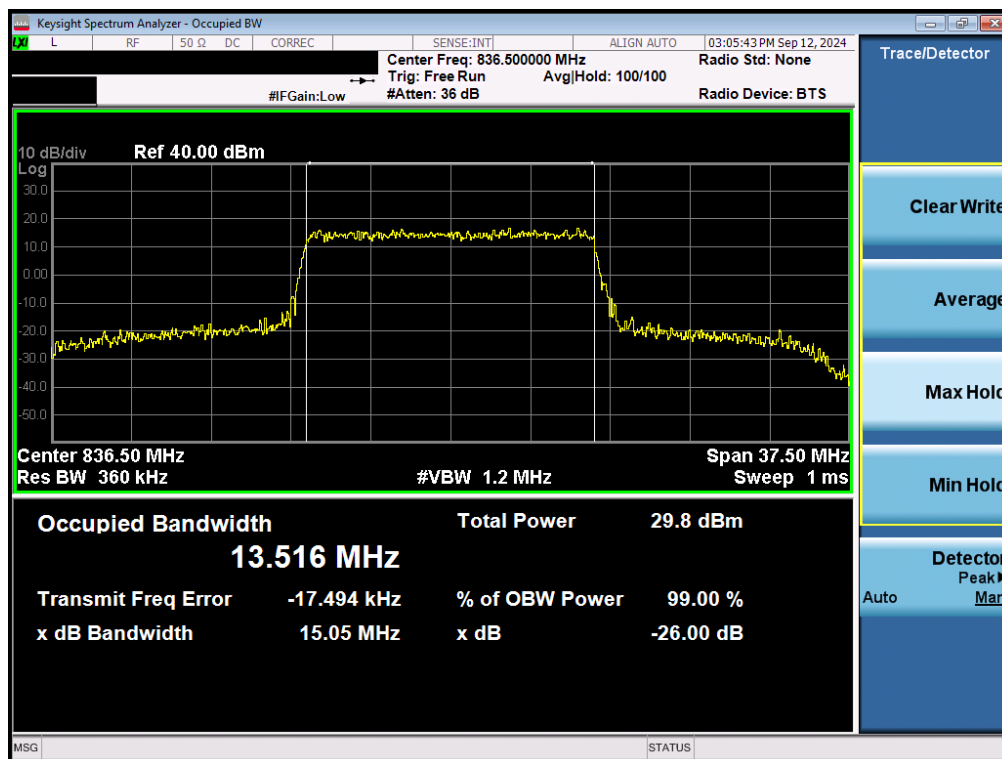

Plot 7-6. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 16 of 102

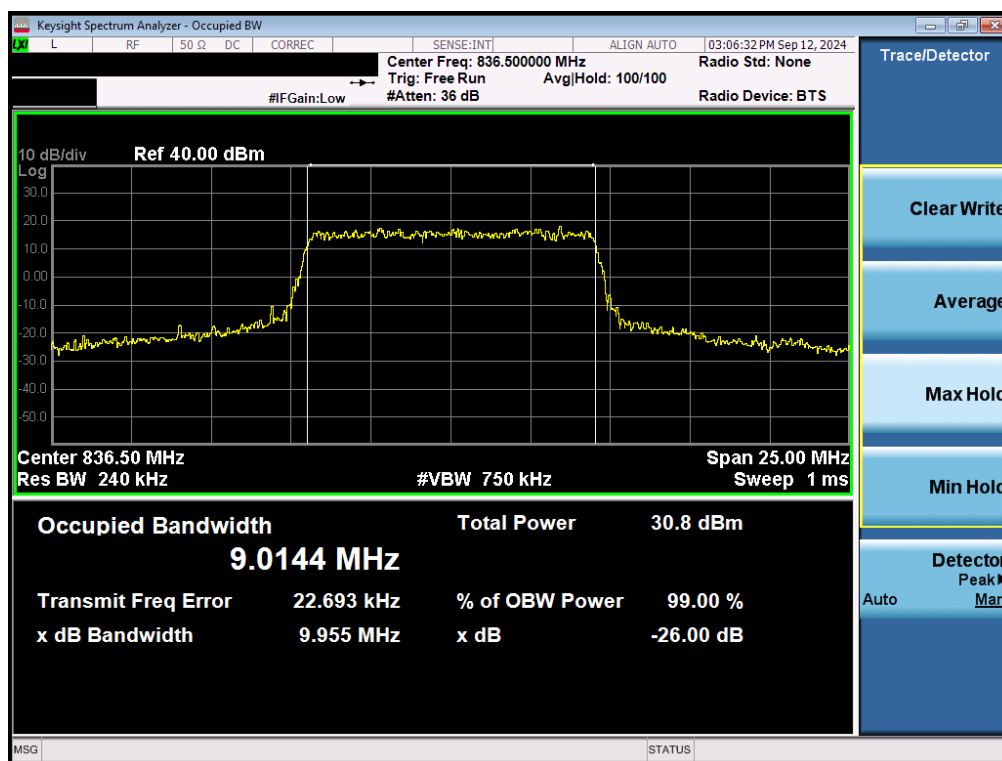

Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB - Ant1)




Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 17 of 102




Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB - Ant1)

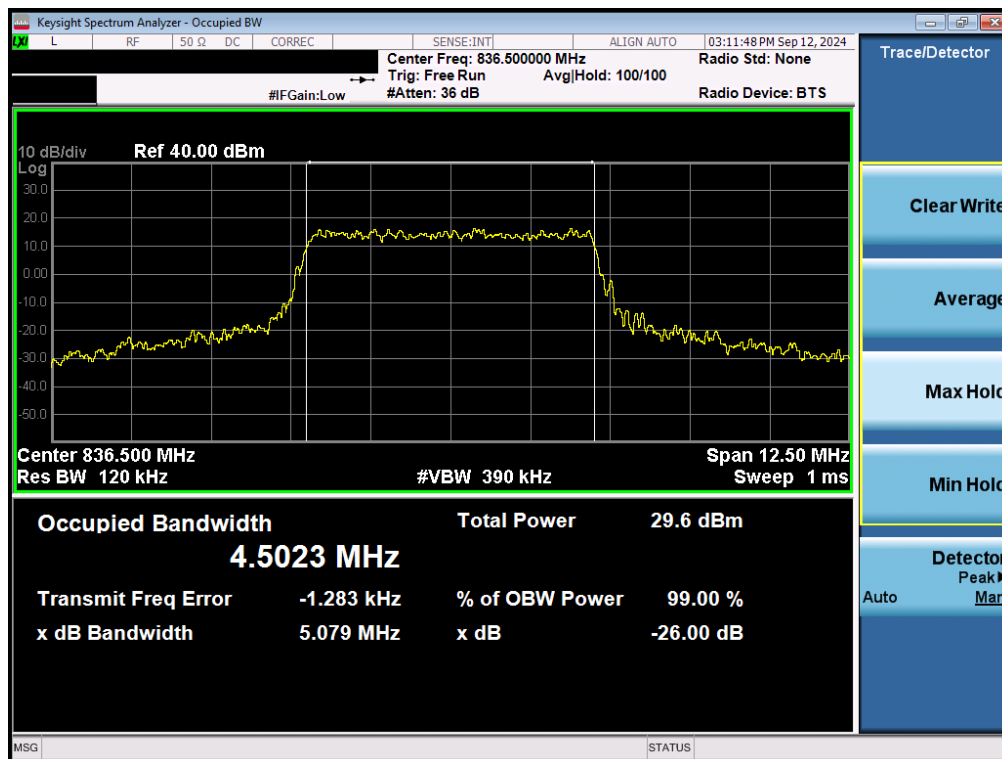


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 18 of 102

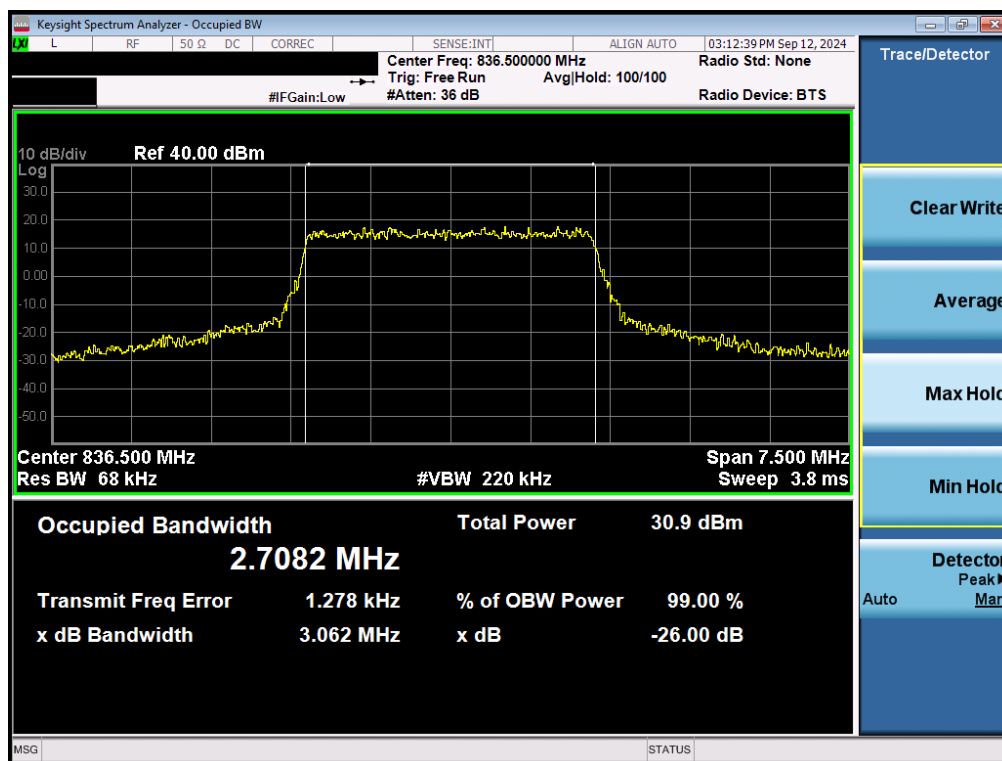


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB - Ant1)

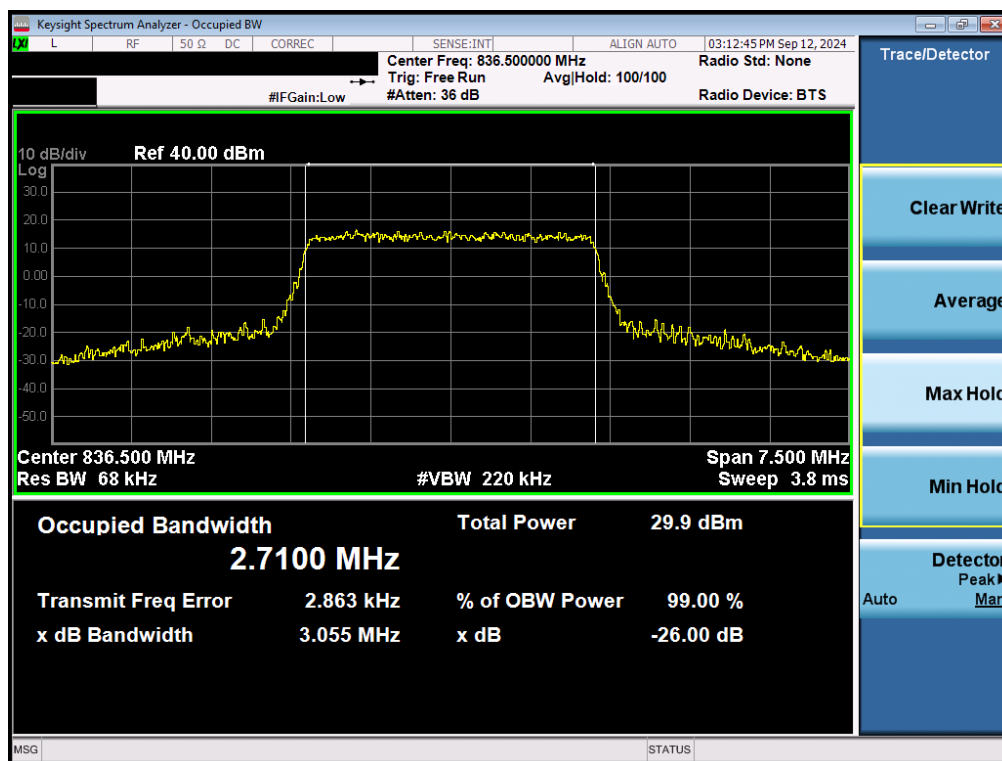

Plot 7-12. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 19 of 102

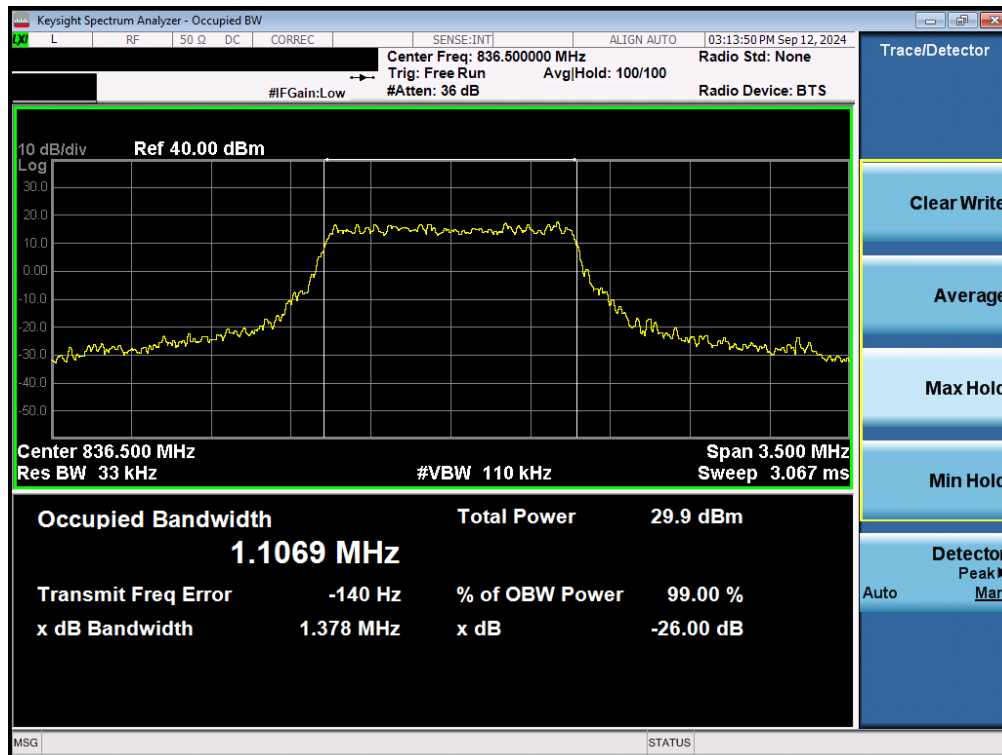


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB - Ant1)




Plot 7-14. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 20 of 102

NR Band n26/5 – Ant1

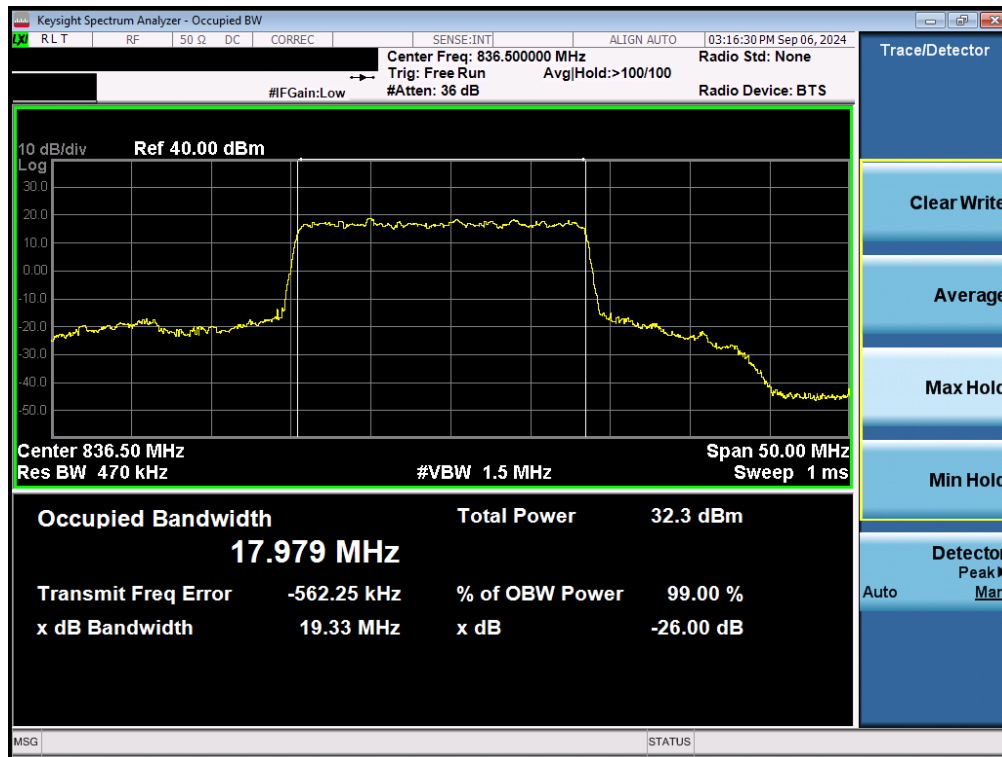


Plot 7-15. Occupied Bandwidth Plot (NR Band n26/5 - 20MHz $\pi/2$ BPSK - Full RB - Ant1)

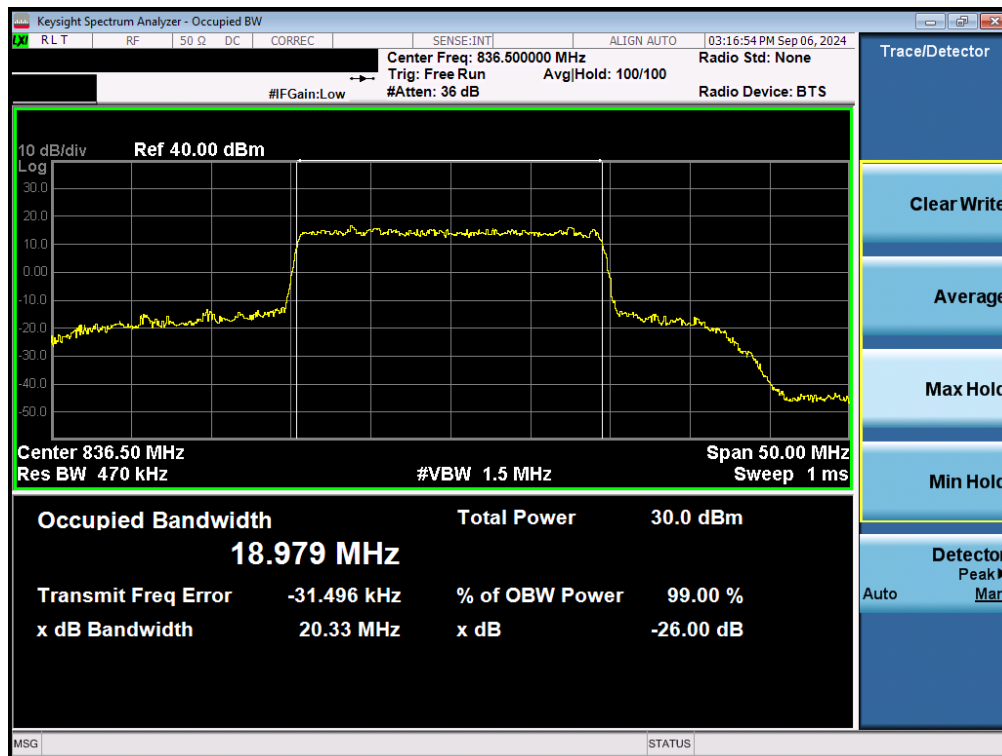


Plot 7-16. Occupied Bandwidth Plot (NR Band n26/5 - 20MHz QPSK - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 21 of 102

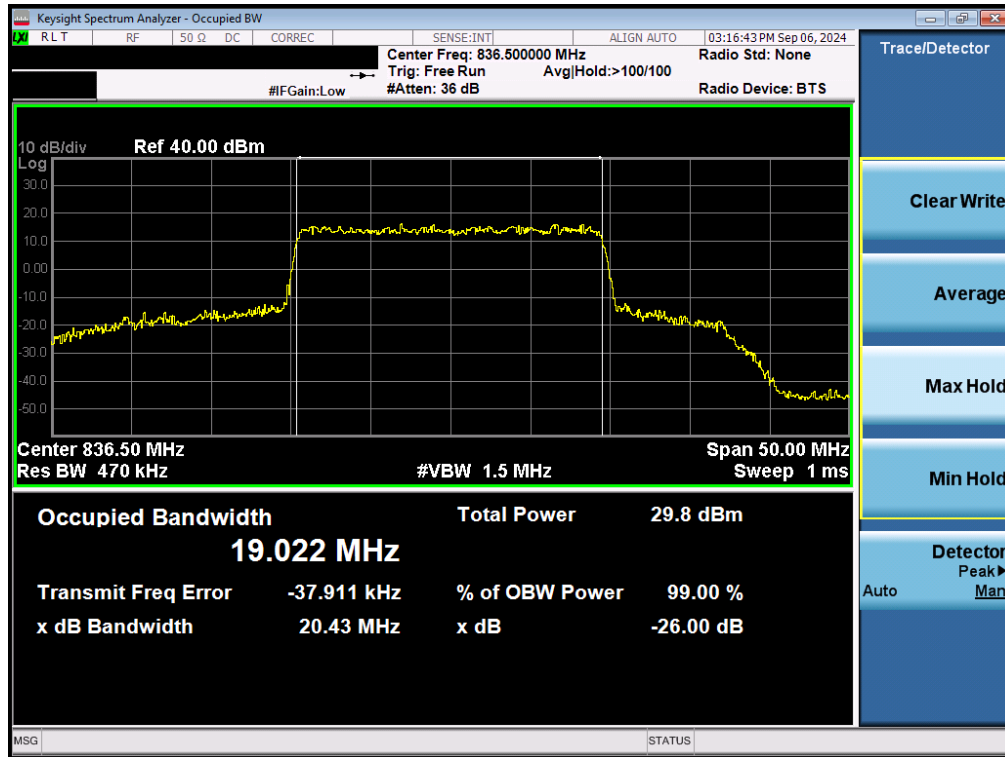

Plot 7-17. Occupied Bandwidth Plot (NR Band n26/5 - 20MHz 16-QAM - Full RB - Ant1)

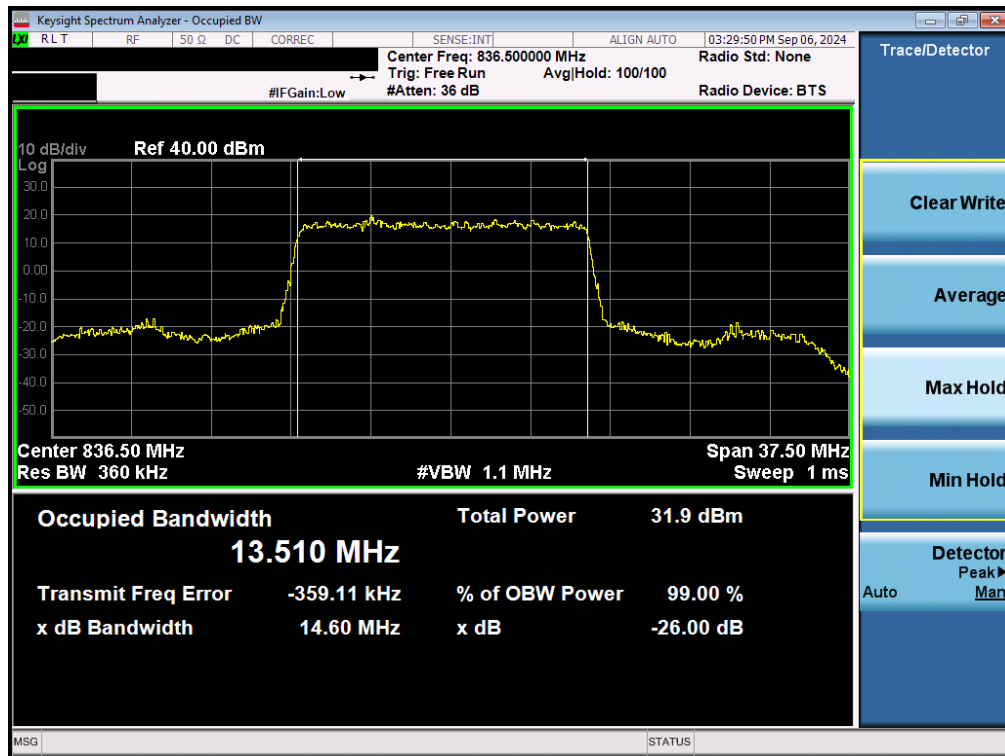

Plot 7-18. Occupied Bandwidth Plot (NR Band n26/5 - 15MHz $\pi/2$ BPSK - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 22 of 102




Plot 7-19. Occupied Bandwidth Plot (NR Band n26/5 - 15MHz QPSK - Full RB - Ant1)




Plot 7-20. Occupied Bandwidth Plot (NR Band n26/5 - 15MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 23 of 102

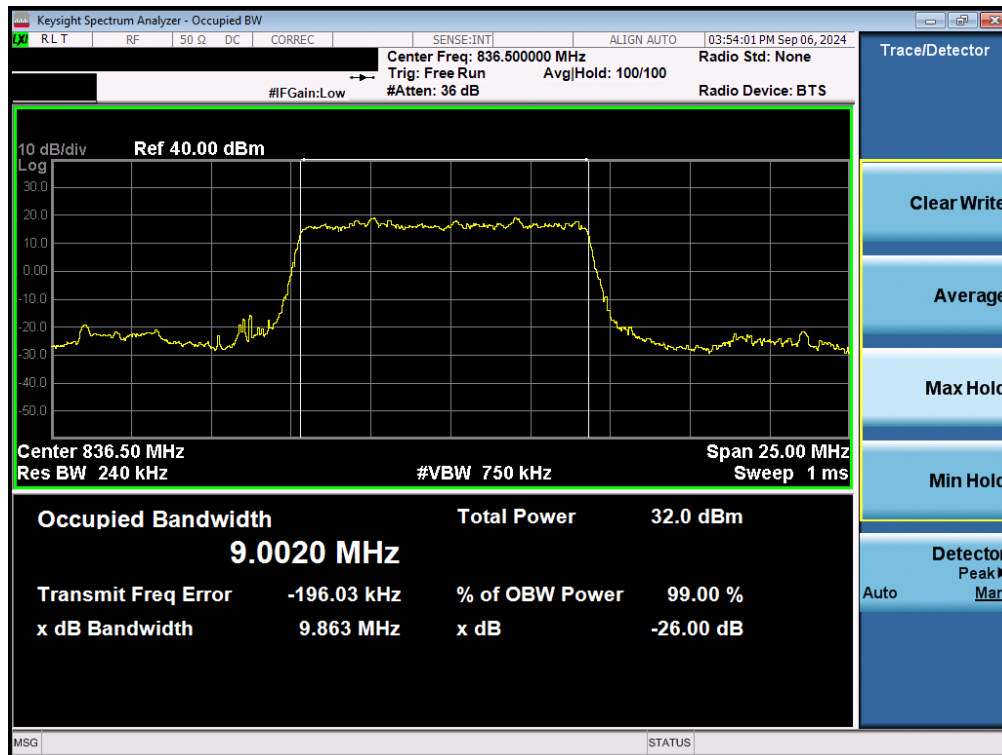


Plot 7-21. Occupied Bandwidth Plot (NR Band n26/5 - 10MHz $\pi/2$ BPSK - Full RB - Ant1)

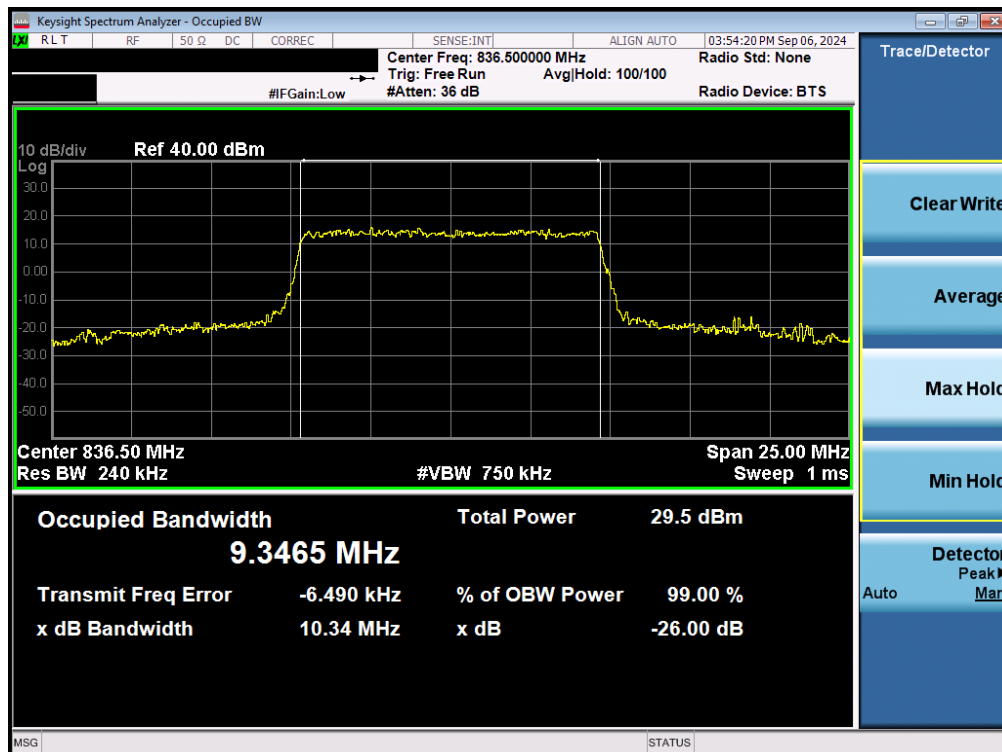

Plot 7-22. Occupied Bandwidth Plot (NR Band n26/5 - 10MHz QPSK - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 24 of 102

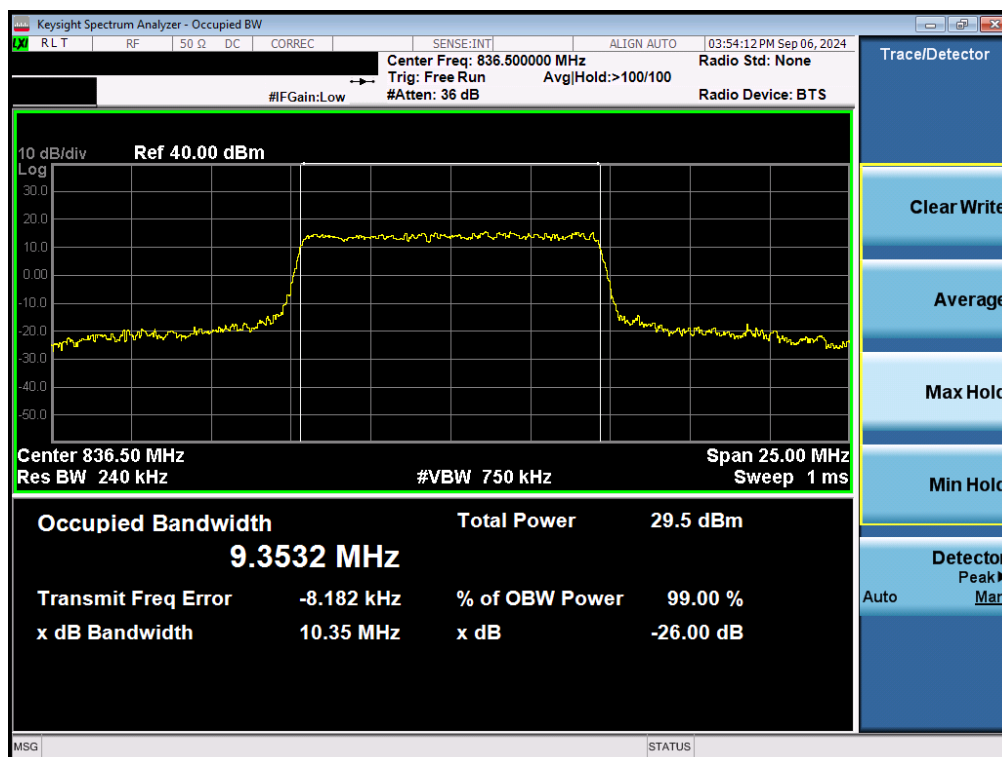


Plot 7-23. Occupied Bandwidth Plot (NR Band n26/5 - 10MHz 16-QAM - Full RB - Ant1)




Plot 7-24. Occupied Bandwidth Plot (NR Band n26/5 - 5MHz $\pi/2$ BPSK - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 25 of 102

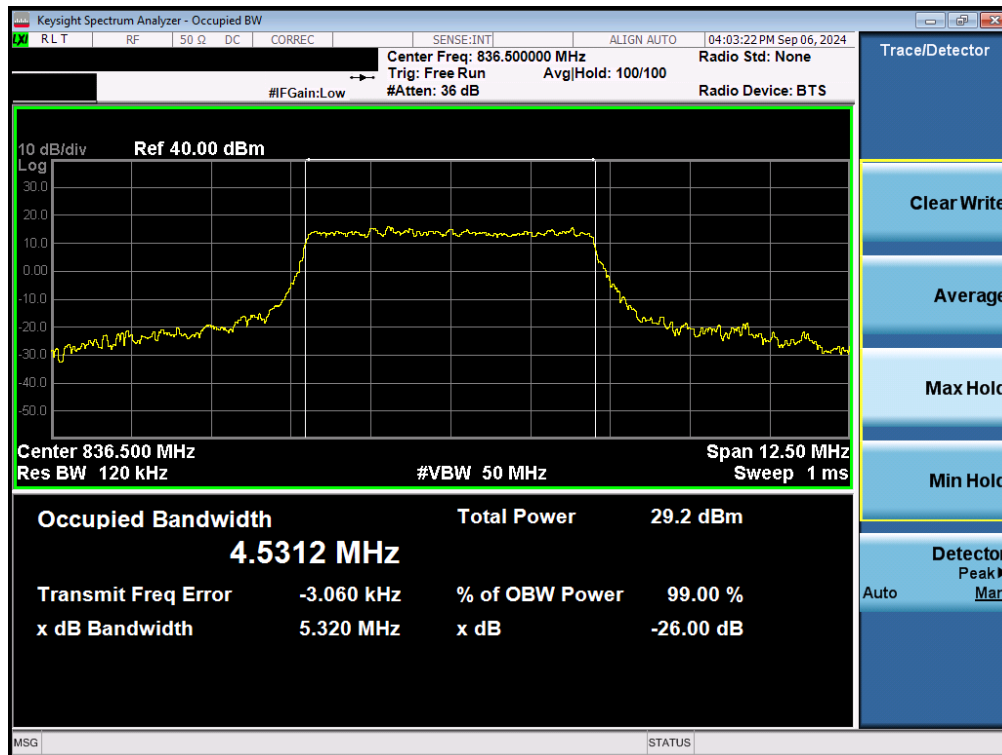

Plot 7-25. Occupied Bandwidth Plot (NR Band n26/5 - 5MHz QPSK - Full RB - Ant1)

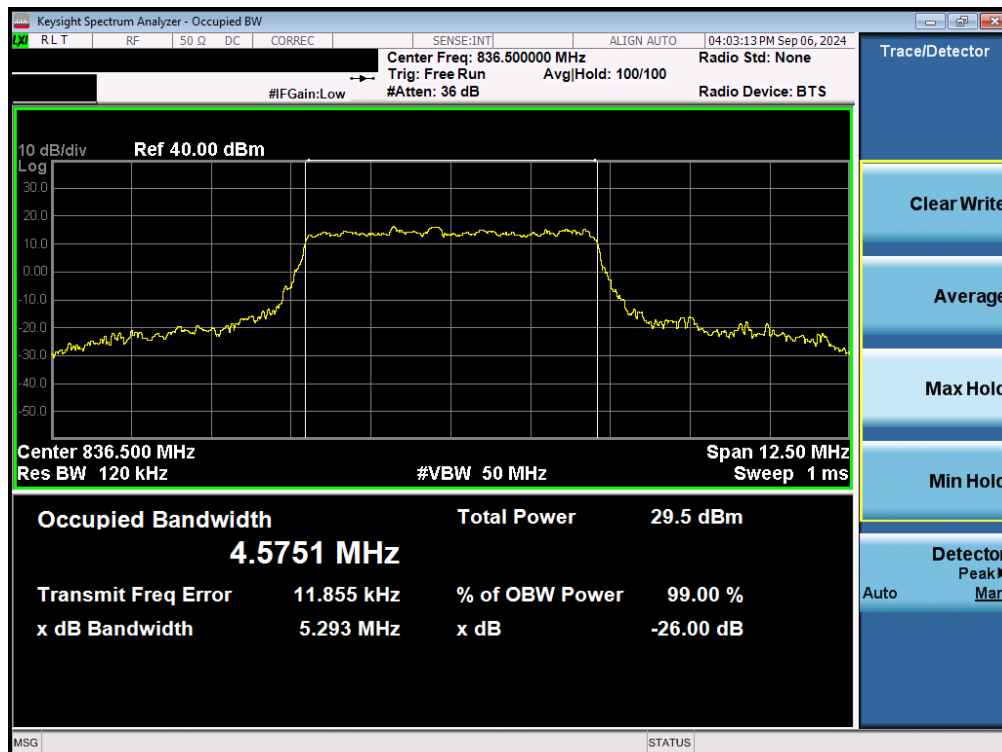

Plot 7-26. Occupied Bandwidth Plot (NR Band n26/5 - 5MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 26 of 102

Mode	Bandwidth	Modulation	OBW [MHz]
GSM-Cell	N/A	GMSK	0.245
GSM-Cell Edge		8-PSK	0.240
WCDMA-Cell		Spread Spectrum	4.15
LTE-B26-5	15MHz	QPSK	13.51
		16QAM	13.51
	10MHz	QPSK	9.03
		16QAM	9.02
	5 MHz	QPSK	4.51
		16QAM	4.53
	3 MHz	QPSK	2.71
		16QAM	2.71
	1.4 MHz	QPSK	1.10
		16QAM	1.10
NR-n26-5	20 MHz	$\pi/2$ BPSK	17.99
		QPSK	18.99
		16QAM	19.11
	15 MHz	$\pi/2$ BPSK	13.50
		QPSK	14.21
		16QAM	14.24
	10 MHz	$\pi/2$ BPSK	9.01
		QPSK	9.36
		16QAM	9.37
	5 MHz	$\pi/2$ BPSK	4.51
		QPSK	4.51
		16QAM	4.58

Table 7-7. Occupied Bandwidth Results – Ant2


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 27 of 102

GPRS Cell – Ant2



FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 28 of 102


WCDMA Cell – Ant2

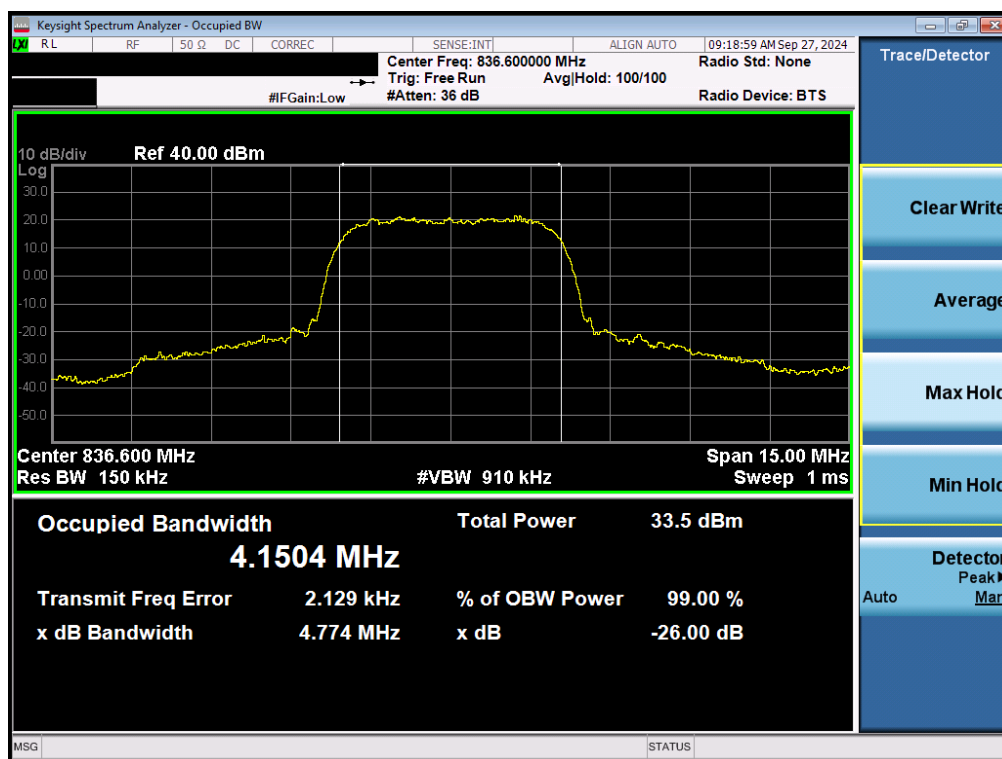


Plot 7-29. Occupied Bandwidth Plot (WCDMA, Ch. 4183 – Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 29 of 102

LTE Band 26/5 – Ant2

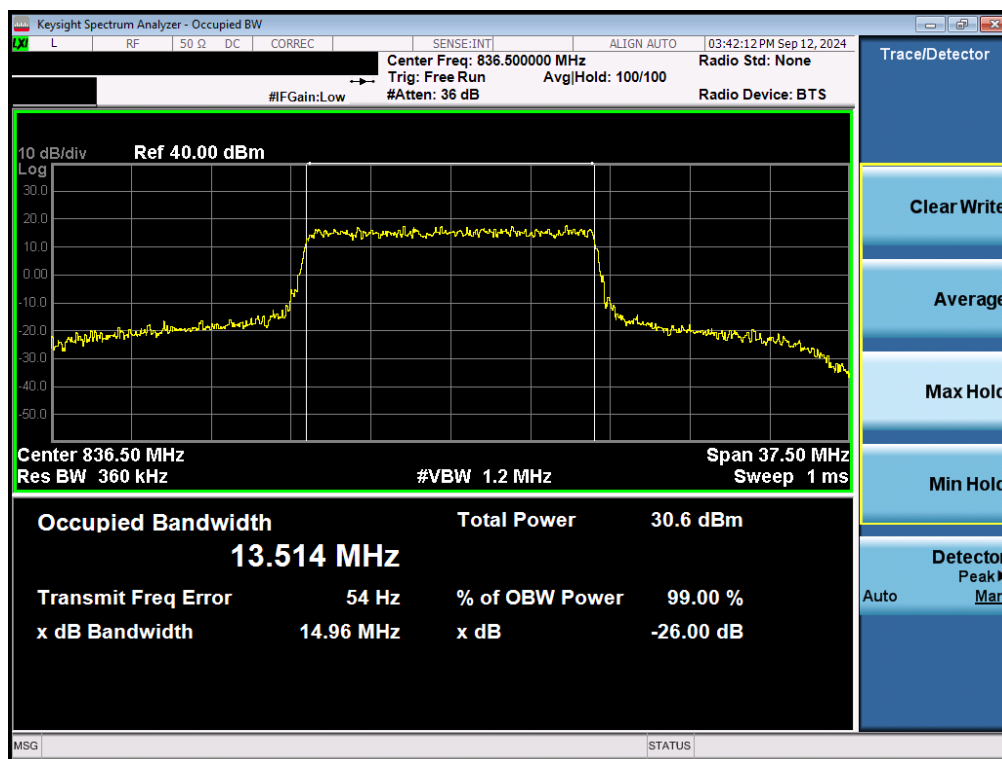

Plot 7-30. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB - Ant2)

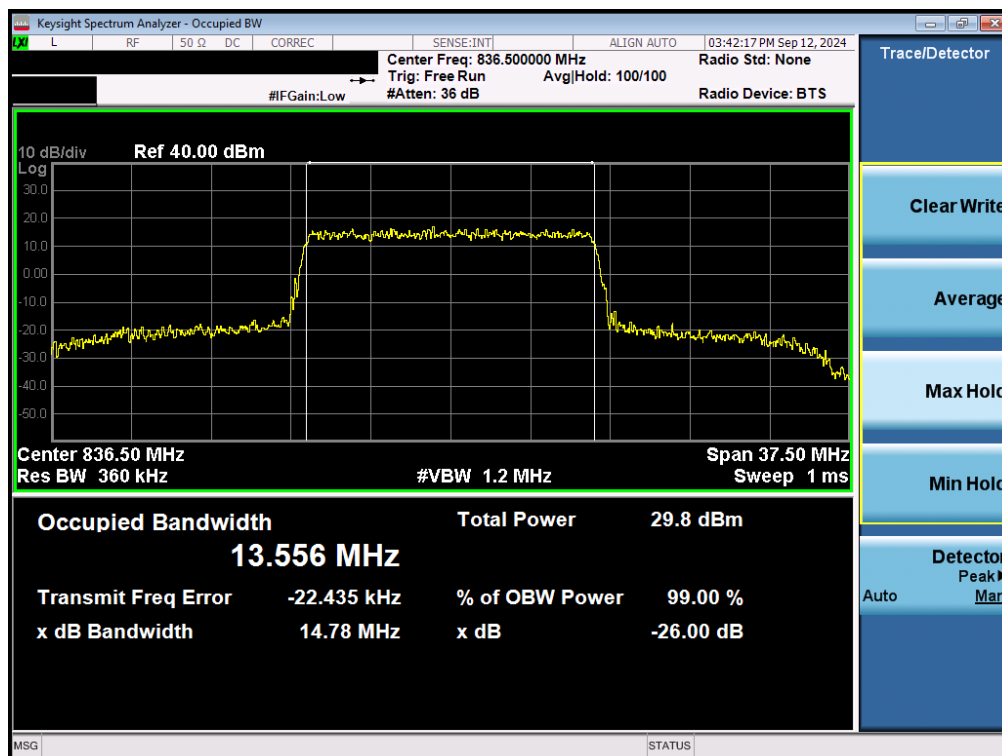

Plot 7-31. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 30 of 102



Plot 7-32. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB - Ant2)




Plot 7-33. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 31 of 102




Plot 7-34. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB - Ant2)

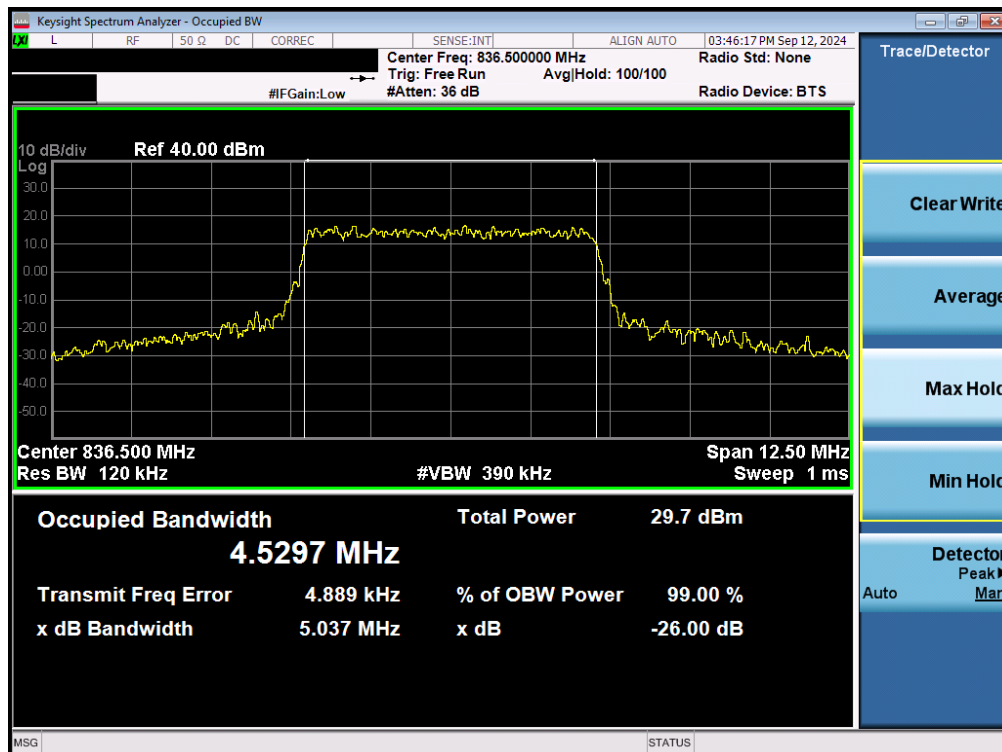


Plot 7-35. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 32 of 102

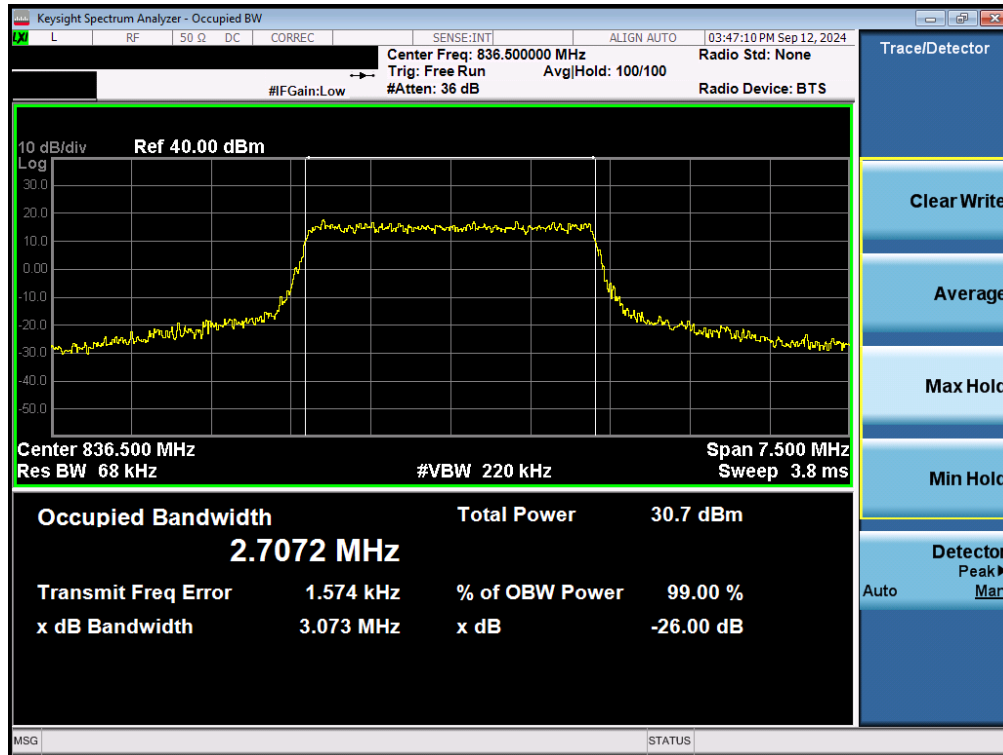


Plot 7-36. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB - Ant2)

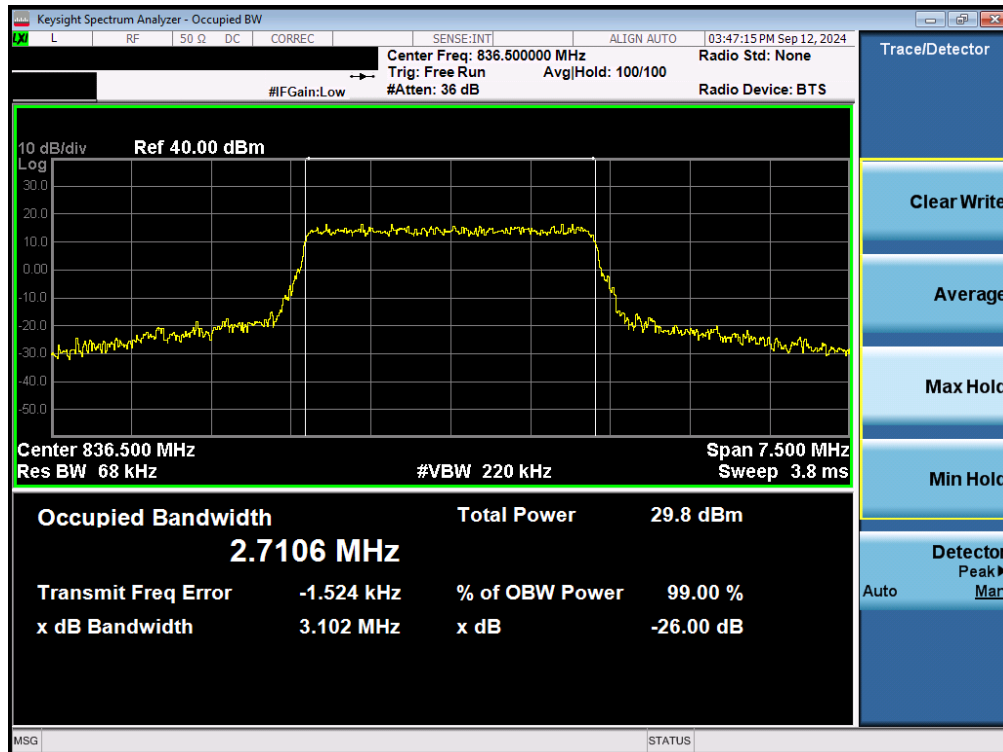

Plot 7-37. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 33 of 102

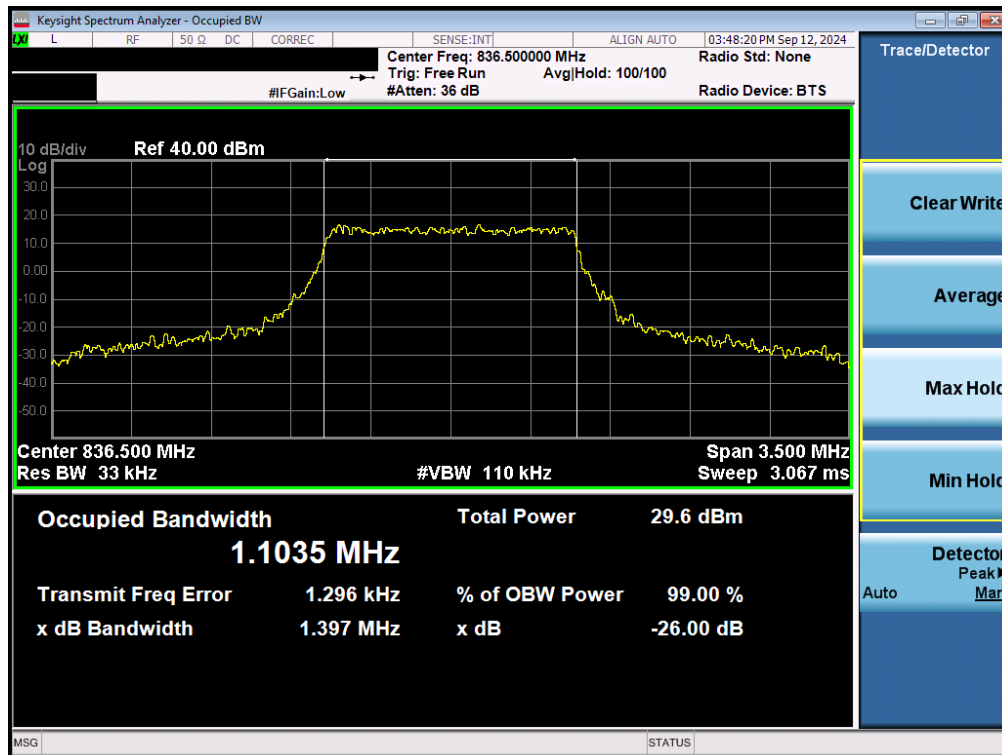


Plot 7-38. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB - Ant2)




Plot 7-39. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 34 of 102

NR Band n26/5 – Ant2

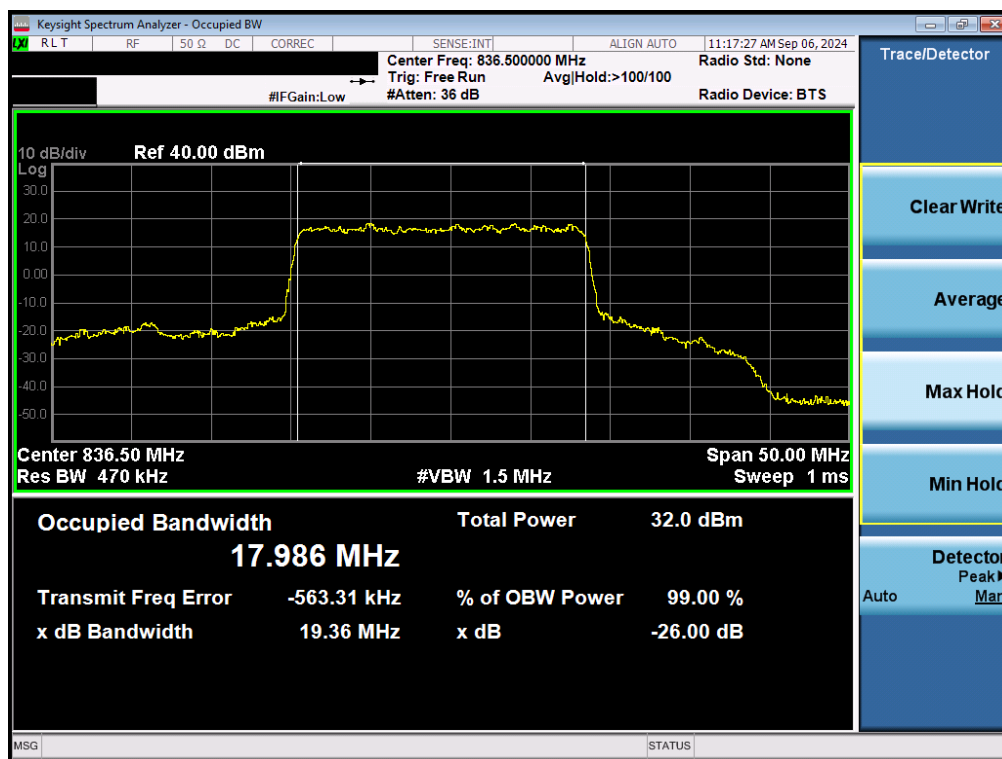


Plot 7-40. Occupied Bandwidth Plot (NR Band n26/5 - 20MHz $\pi/2$ BPSK - Full RB - Ant2)

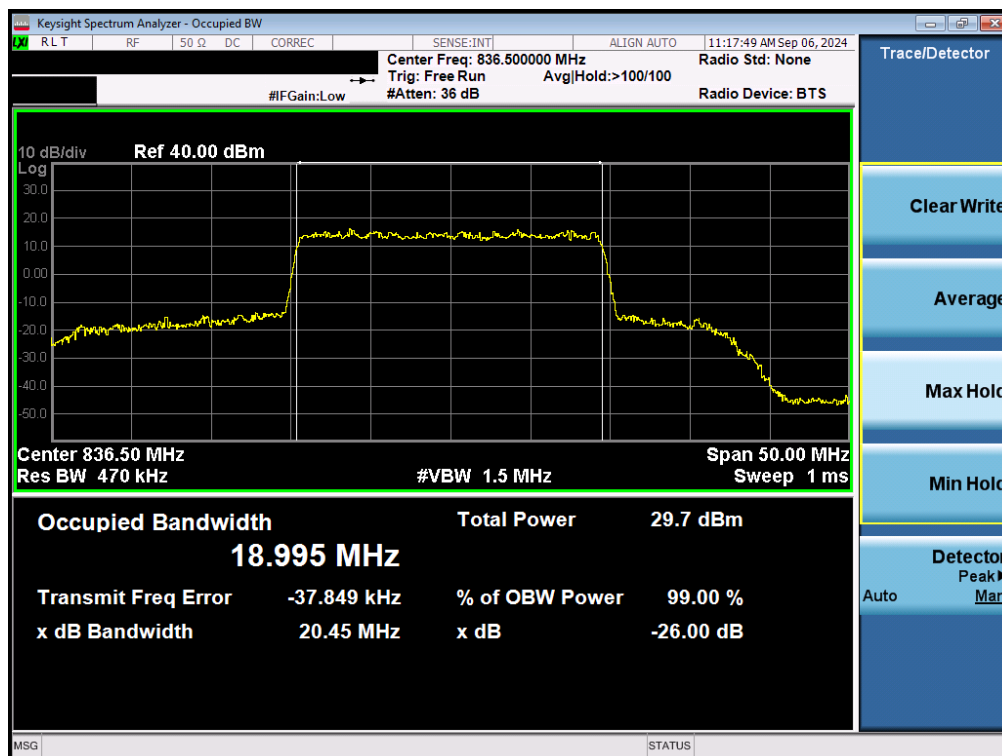


Plot 7-41. Occupied Bandwidth Plot (NR Band n26/5 - 20MHz QPSK - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 35 of 102

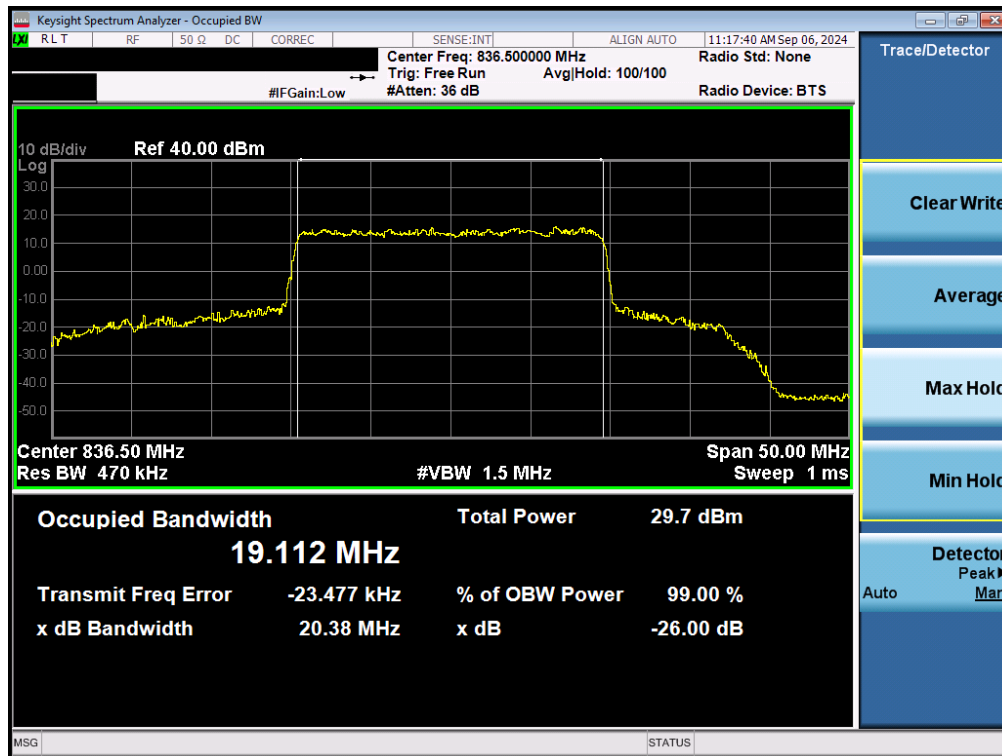

Plot 7-42. Occupied Bandwidth Plot (NR Band n26/5 - 20MHz 16-QAM - Full RB - Ant2)

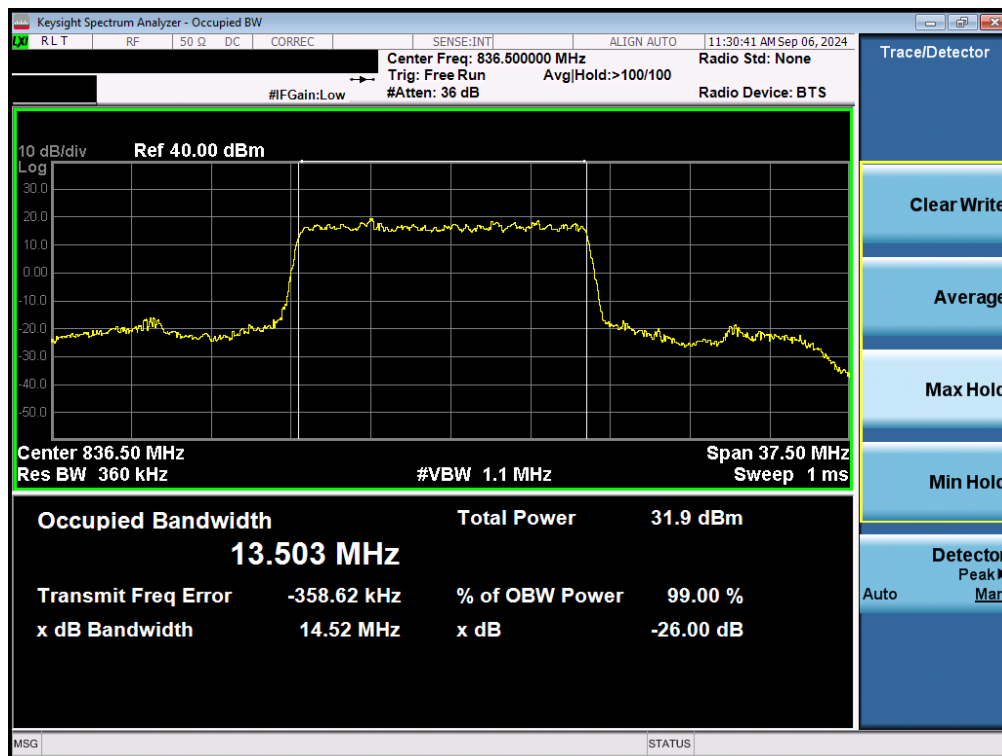


Plot 7-43. Occupied Bandwidth Plot (NR Band n26/5 - 15MHz $\pi/2$ BPSK - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 36 of 102




Plot 7-44. Occupied Bandwidth Plot (NR Band n26/5 - 15MHz QPSK - Full RB - Ant2)

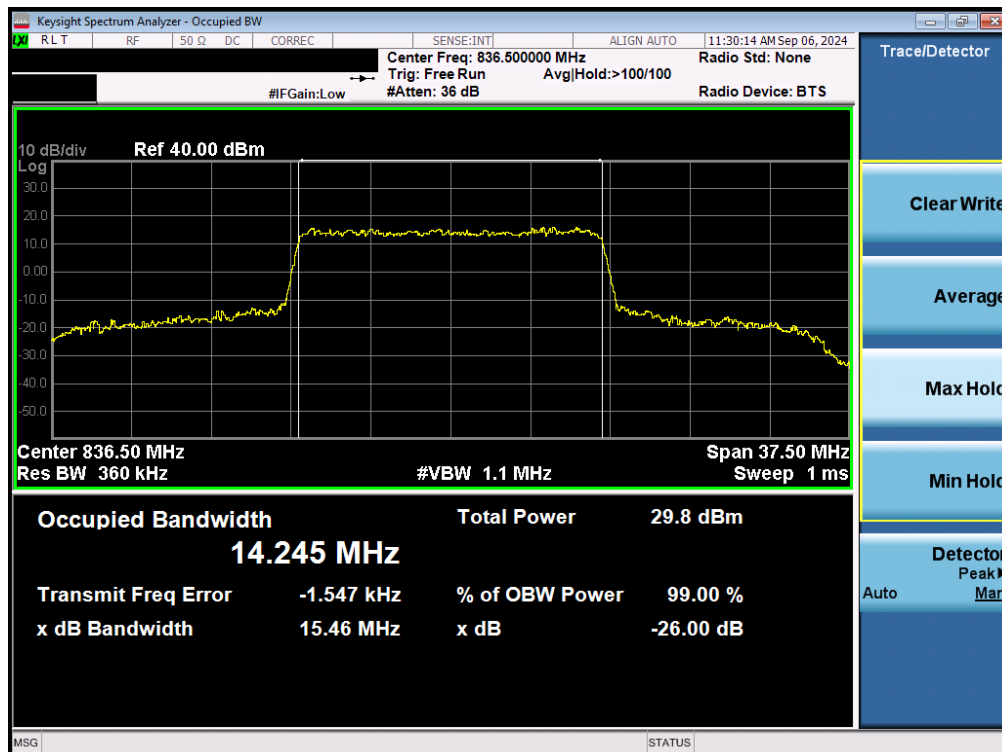

Plot 7-45. Occupied Bandwidth Plot (NR Band n26/5 - 15MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 37 of 102

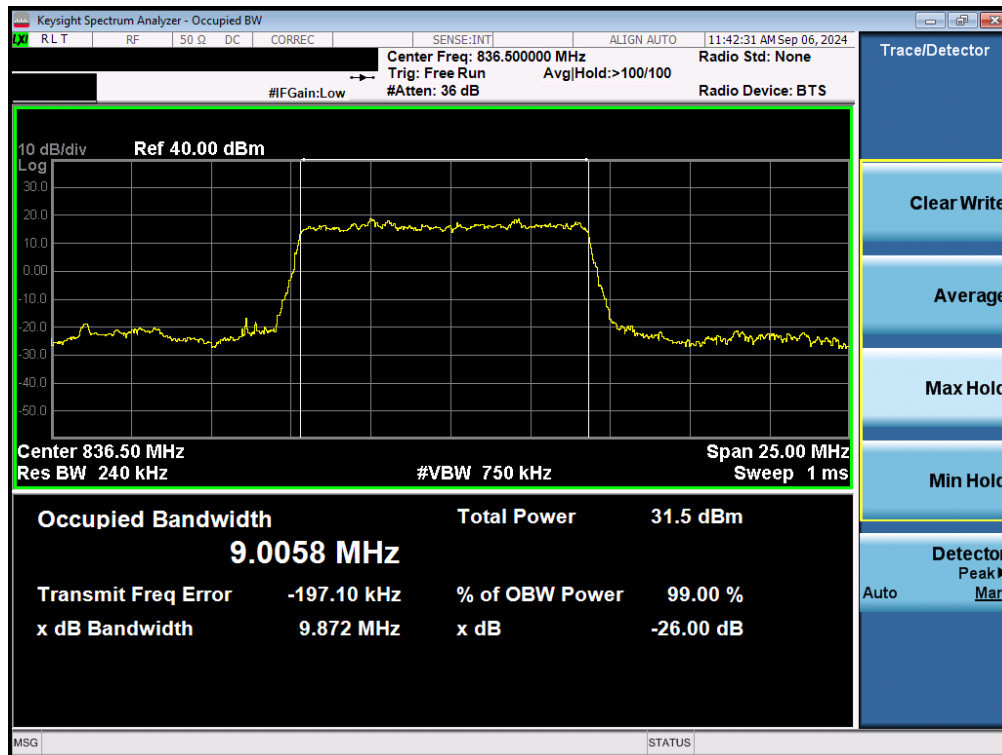

Plot 7-46. Occupied Bandwidth Plot (NR Band n26/5 - 10MHz $\pi/2$ BPSK - Full RB - Ant2)




Plot 7-47. Occupied Bandwidth Plot (NR Band n26/5 - 10MHz QPSK - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 38 of 102



Plot 7-48. Occupied Bandwidth Plot (NR Band n26/5 - 10MHz 16-QAM - Full RB - Ant2)

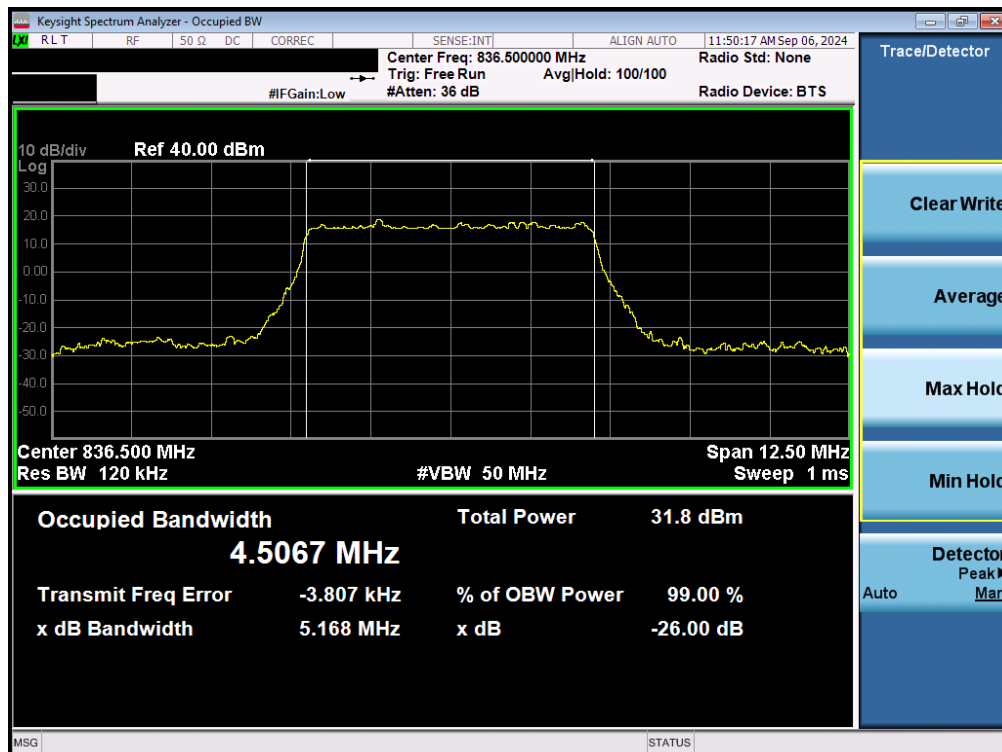


Plot 7-49. Occupied Bandwidth Plot (NR Band n26/5 - 5MHz $\pi/2$ BPSK - Full RB - Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 39 of 102



Plot 7-50. Occupied Bandwidth Plot (NR Band n26/5 - 5MHz QPSK - Full RB - Ant2)

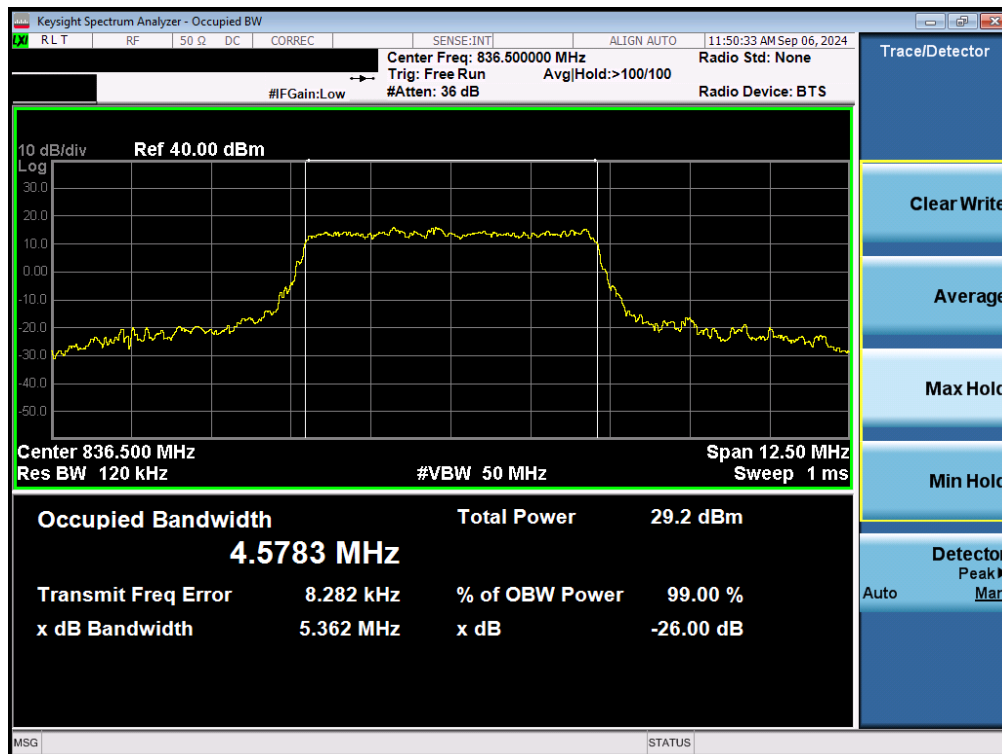

Plot 7-51. Occupied Bandwidth Plot (NR Band n26/5 - 5MHz 16-QAM - Full RB - ABnt2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 40 of 102

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

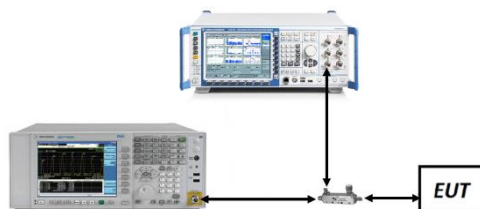


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 41 of 102

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
GSM-Cell	250kHz	Low	30.0 - 823.0	-32.30	-13.0	-19.30
		Low	849.0 - 1000.0	-56.65	-13.0	-43.65
		Low	1000.0 - 10000.0	-29.26	-13.0	-16.26
		Mid	30.0 - 824.0	-56.27	-13.0	-43.26
		Mid	849.0 - 1000.0	-56.71	-13.0	-43.71
		Mid	1000.0 - 10000.0	-29.90	-13.0	-16.90
		High	30.0 - 824.0	-56.42	-13.0	-43.42
		High	850.0 - 1000.0	-36.71	-13.0	-23.71
		High	1000.0 - 10000.0	-28.25	-13.0	-15.25
WCDMA-Cell	5MHz	Low	30.0 - 823.0	-27.82	-13.0	-14.82
		Low	849.0 - 1000.0	-65.79	-13.0	-52.79
		Low	1000.0 - 10000.0	-46.96	-13.0	-33.96
		Mid	30.0 - 824.0	-56.63	-13.0	-43.63
		Mid	849.0 - 1000.0	-57.69	-13.0	-44.69
		Mid	1000.0 - 10000.0	-47.59	-13.0	-34.59
		High	30.0 - 824.0	-64.94	-13.0	-51.94
		High	850.0 - 1000.0	-30.90	-13.0	-17.90
		High	1000.0 - 10000.0	-47.71	-13.0	-34.71
LTE-B26-5	10MHz	Low	30.0 - 823.0	-61.89	-13.0	-48.89
		Low	849.0 - 1000.0	-65.27	-13.0	-52.26
		Low	1000.0 - 10000.0	-44.88	-13.0	-31.88
		Mid	30.0 - 824.0	-64.08	-13.0	-51.08
		Mid	849.0 - 1000.0	-65.05	-13.0	-52.05
		Mid	1000.0 - 10000.0	-44.53	-13.0	-31.53
		High	30.0 - 824.0	-64.97	-13.0	-51.97
		High	850.0 - 1000.0	-62.66	-13.0	-49.66
		High	1000.0 - 10000.0	-44.68	-13.0	-31.68
NR-n26-5	20MHz	Low	30.0 - 824.0	-60.61	-13.0	-47.61
		Low	849.0 - 1000.0	-63.84	-13.0	-50.84
		Low	1000.0 - 10000.0	-45.19	-13.0	-32.19
		Mid	30.0 - 824.0	-61.59	-13.0	-48.59
		Mid	849.0 - 1000.0	-62.76	-13.0	-49.76
		Mid	1000.0 - 10000.0	-45.77	-13.0	-32.77
		High	30.0 - 824.0	-63.20	-13.0	-50.20
		High	849.0 - 1000.0	-63.10	-13.0	-50.10
		High	1000.0 - 10000.0	-45.26	-13.0	-32.26


Table 7-8. Conducted Spurious Emissions Results – Ant1

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 42 of 102

GSM/GPRS Cell – Ant1

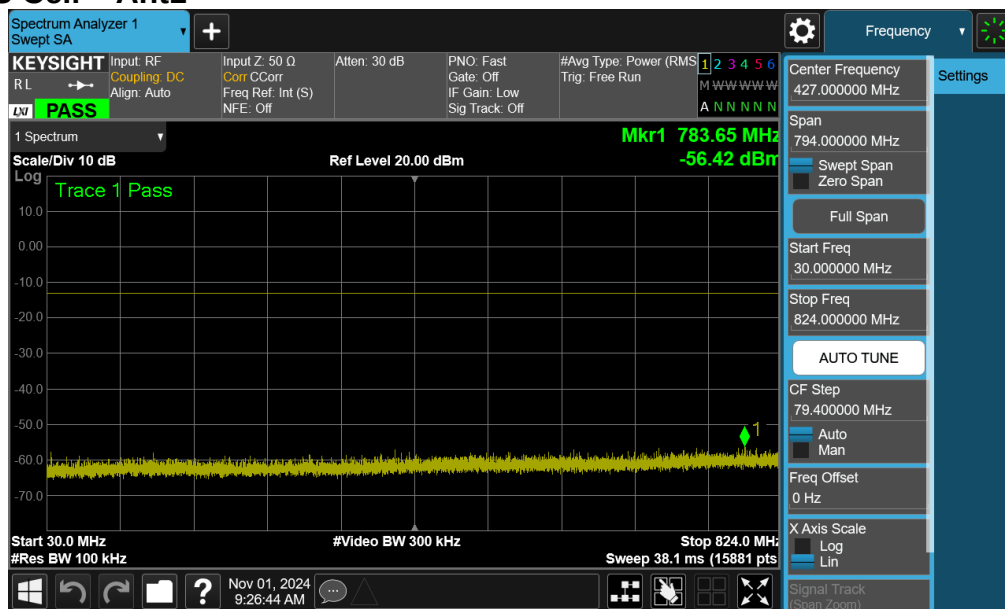


Plot 7-52. Conducted Spurious Plot (GPRS Ch. 251 – Ant1)

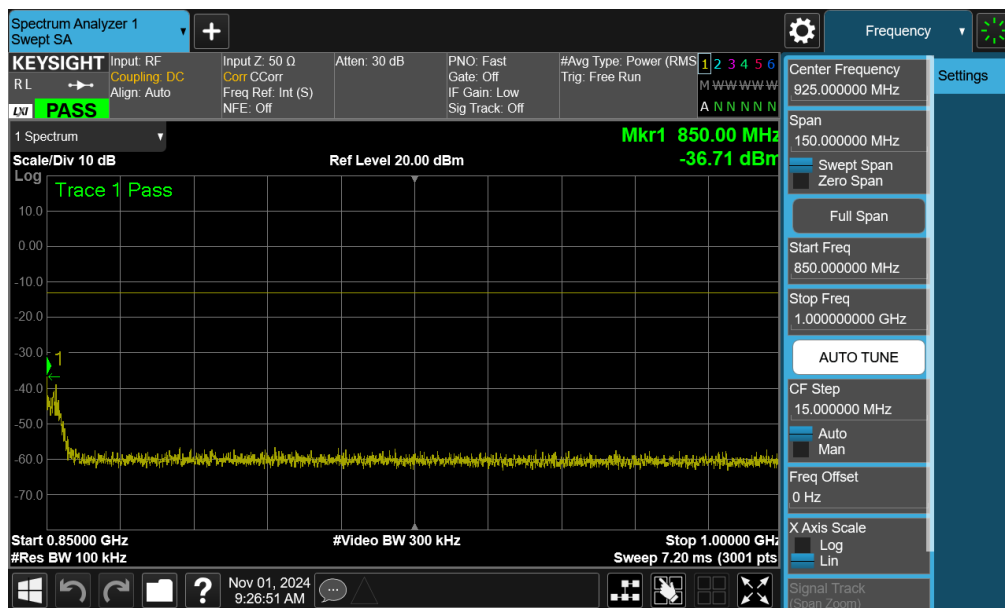

Plot 7-53. Conducted Spurious Plot (GPRS Ch. 251 – Ant1)


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 43 of 102

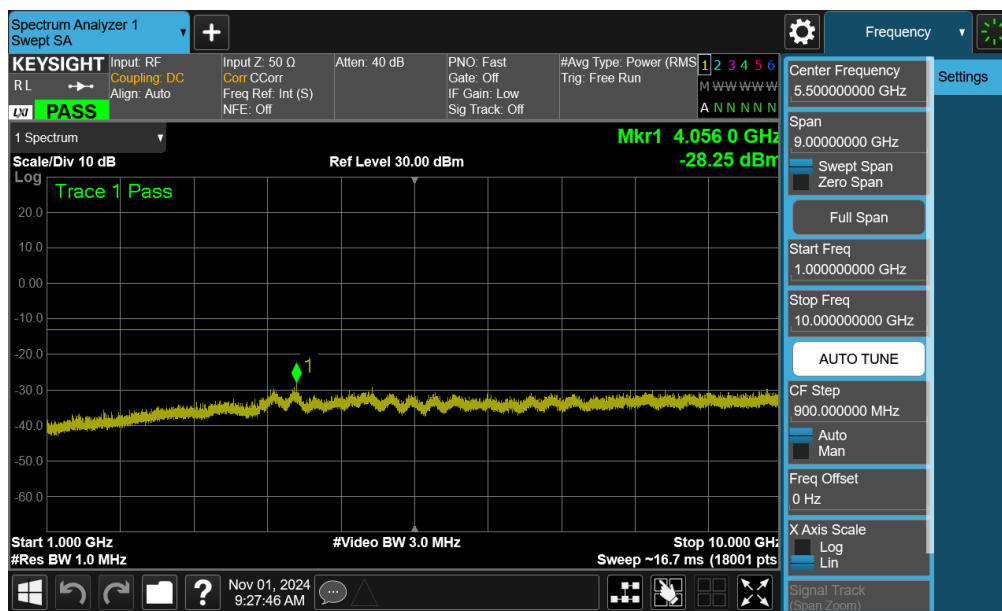


Plot 7-54. Conducted Spurious Plot (GPRS Ch. 251 – Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 44 of 102

WCDMA Cell – Ant1

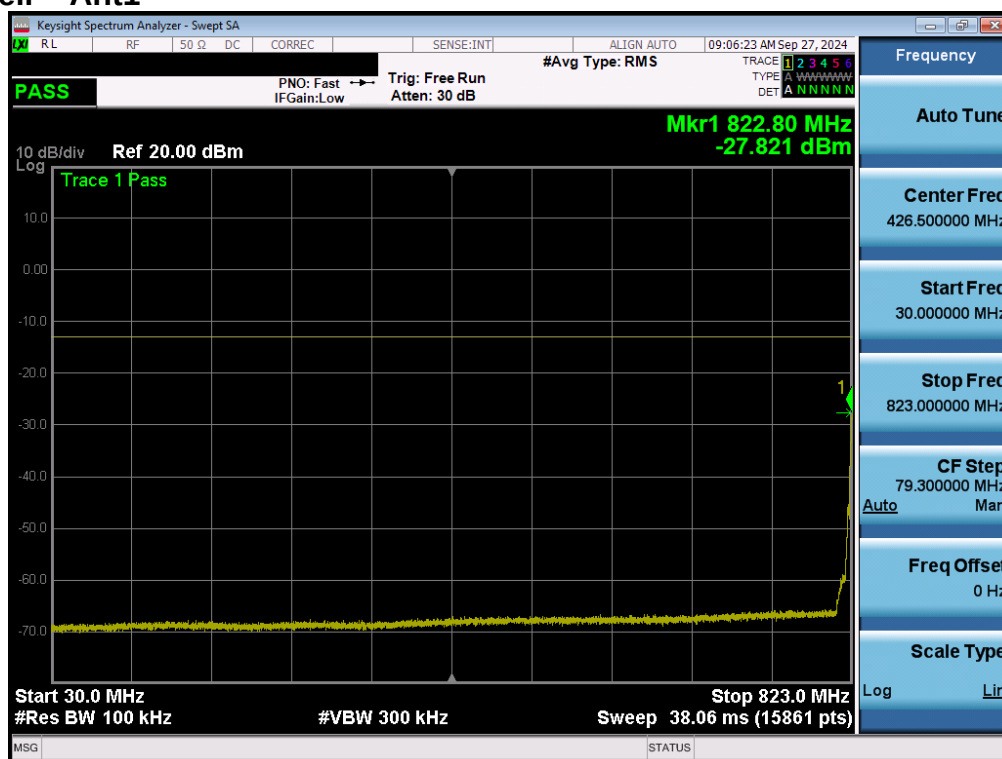


Plot 7-55. Conducted Spurious Plot (WCDMA Low – Ant1)

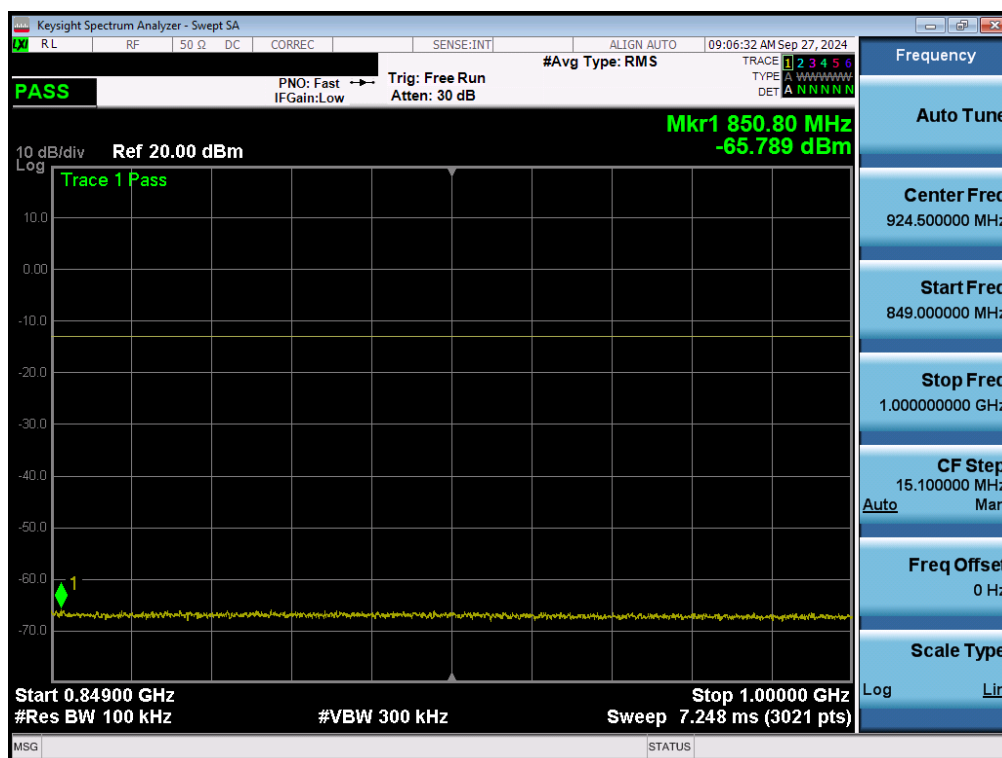

Plot 7-56. Conducted Spurious Plot (WCDMA Low – Ant1)


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 45 of 102

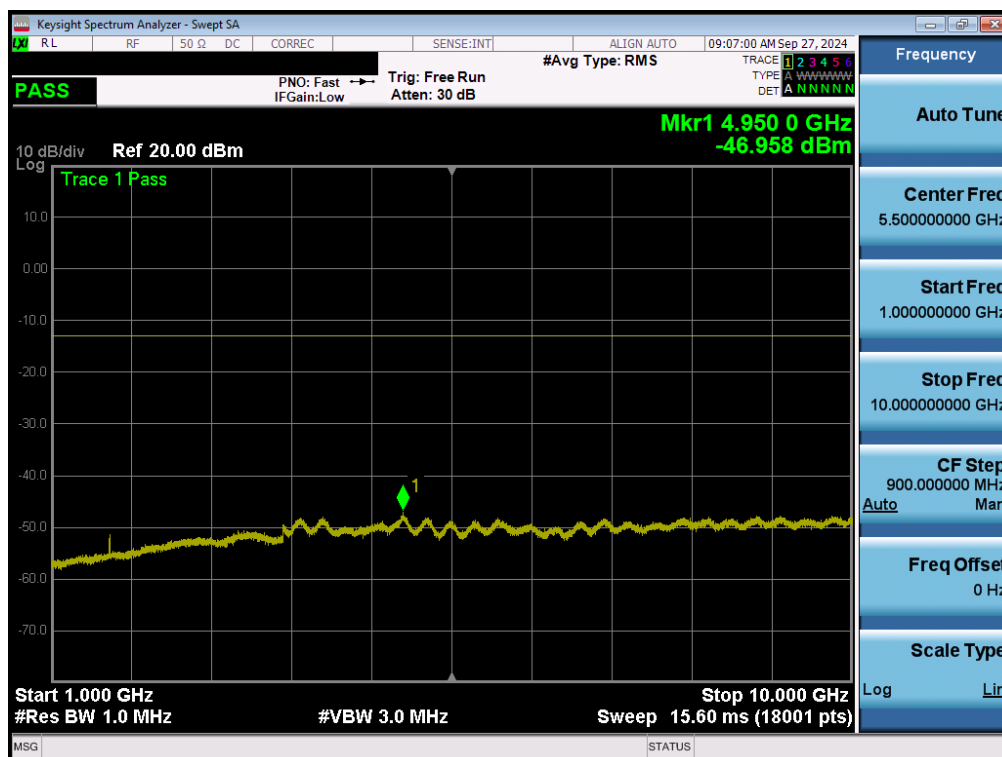


Plot 7-57. Conducted Spurious Plot (WCDMA Low – Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 46 of 102

LTE Band 26/5 – Ant1

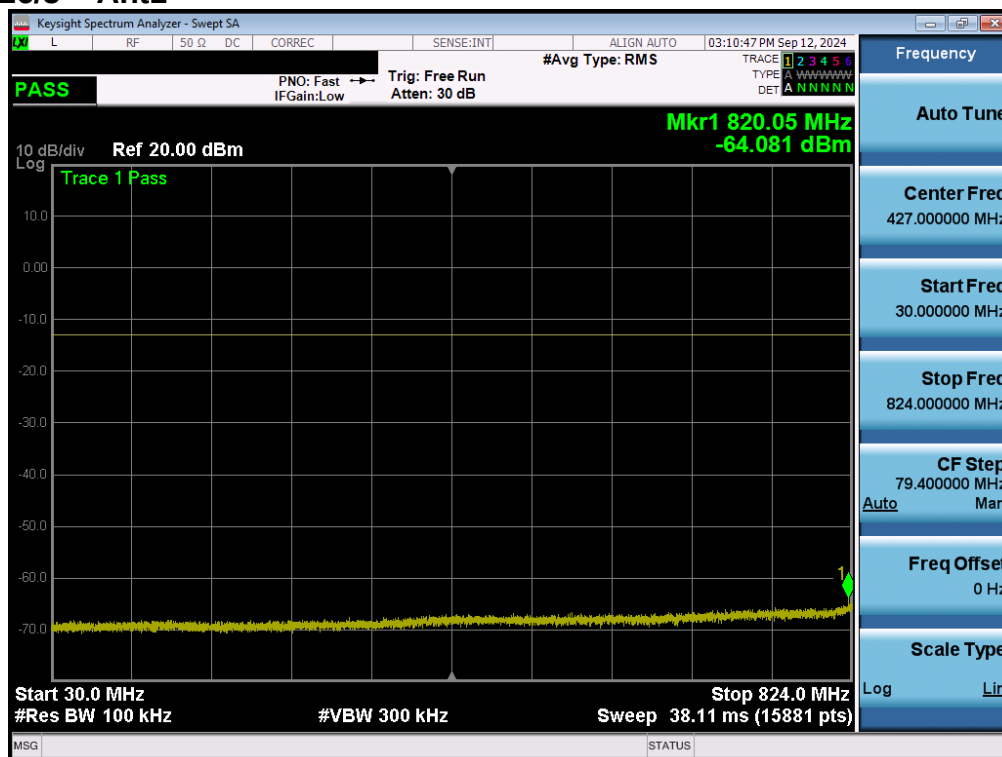


Plot 7-58. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel – Ant1)

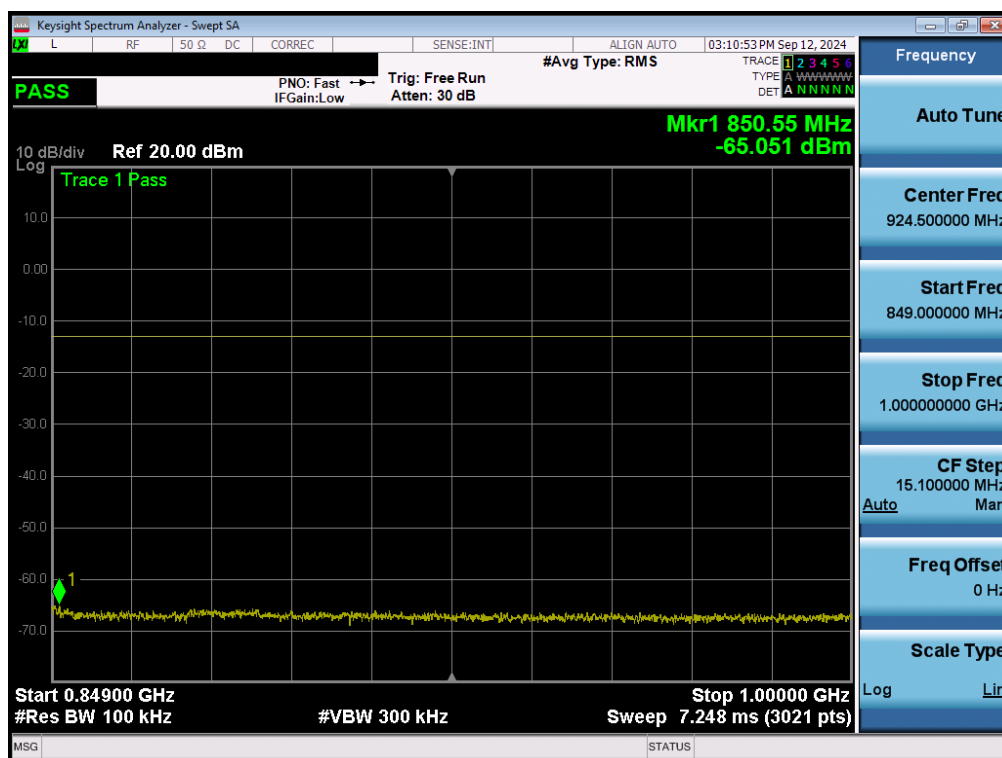

Plot 7-59. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel – Ant1)


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 47 of 102

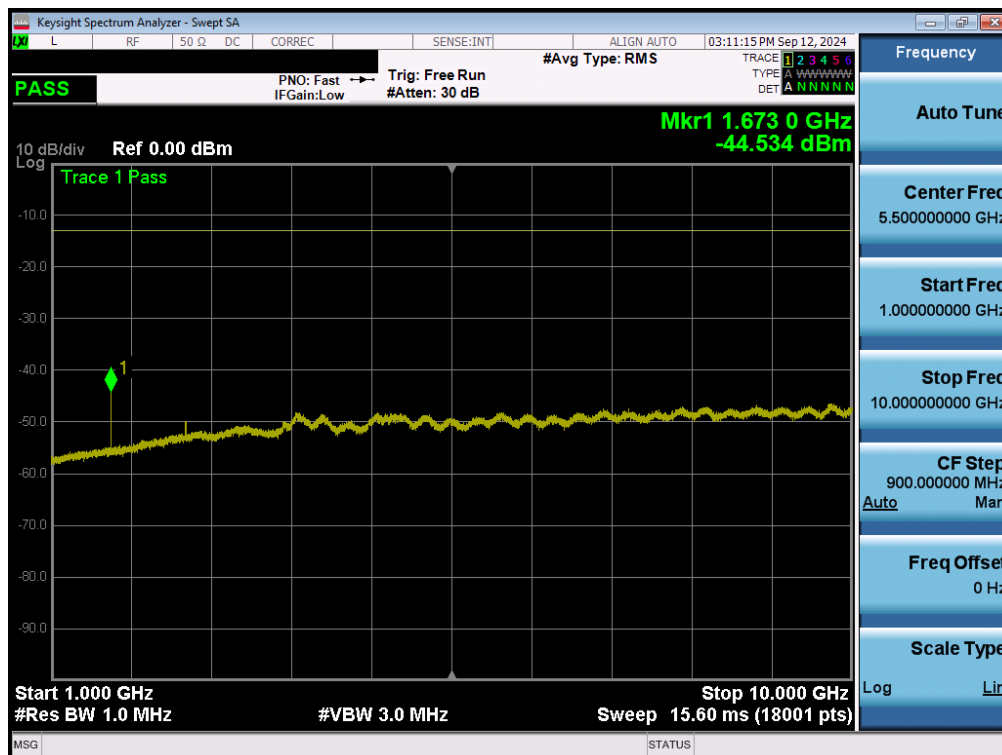


Plot 7-60. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel – Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 48 of 102

NR Band n26/5 – Ant1

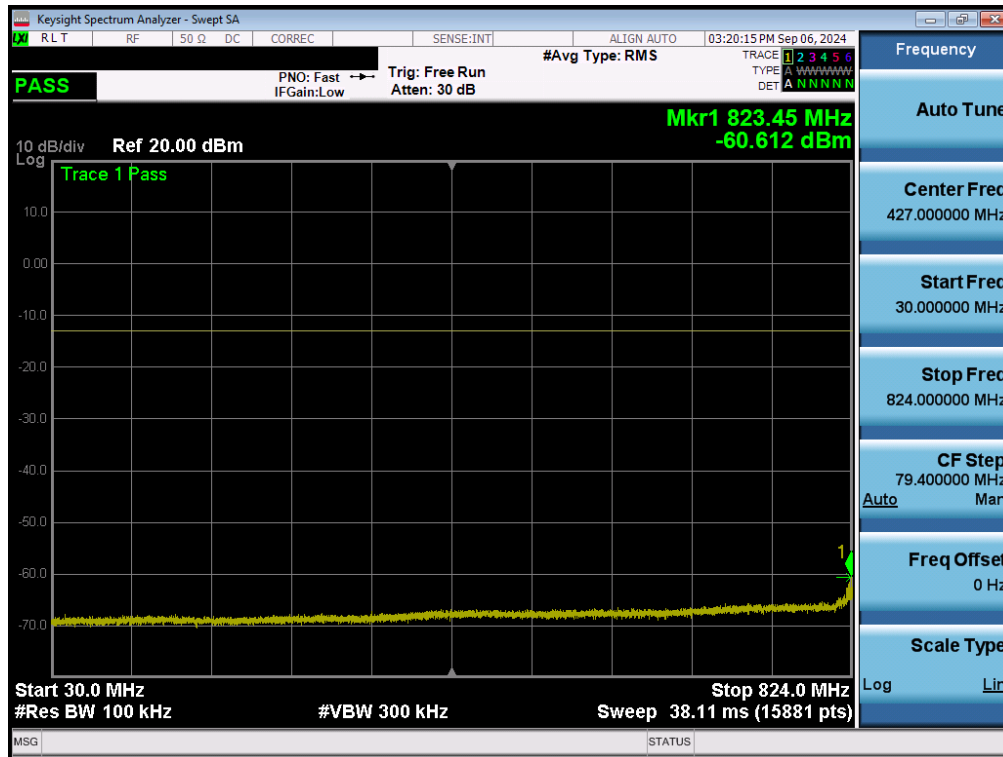


Plot 7-61. Conducted Spurious Plot (NR Band n26/5 - 20.0MHz - 1 RB - Low Channel - Ant1)

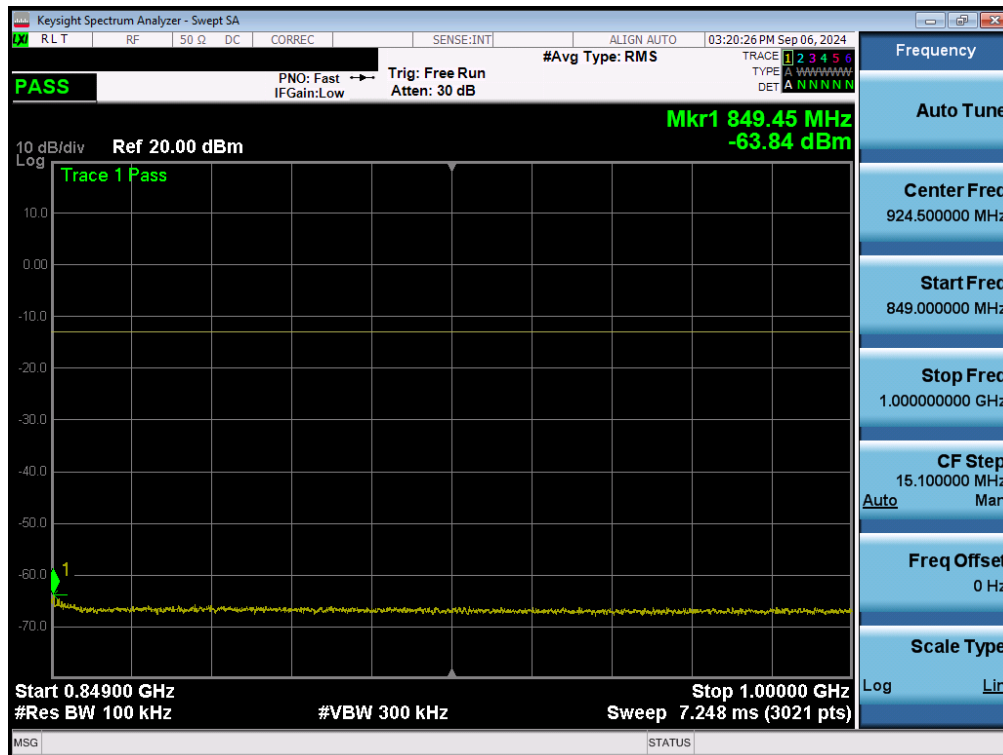

Plot 7-62. Conducted Spurious Plot (NR Band n26/5 - 20.0MHz - 1 RB - Low Channel - Ant1)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 49 of 102

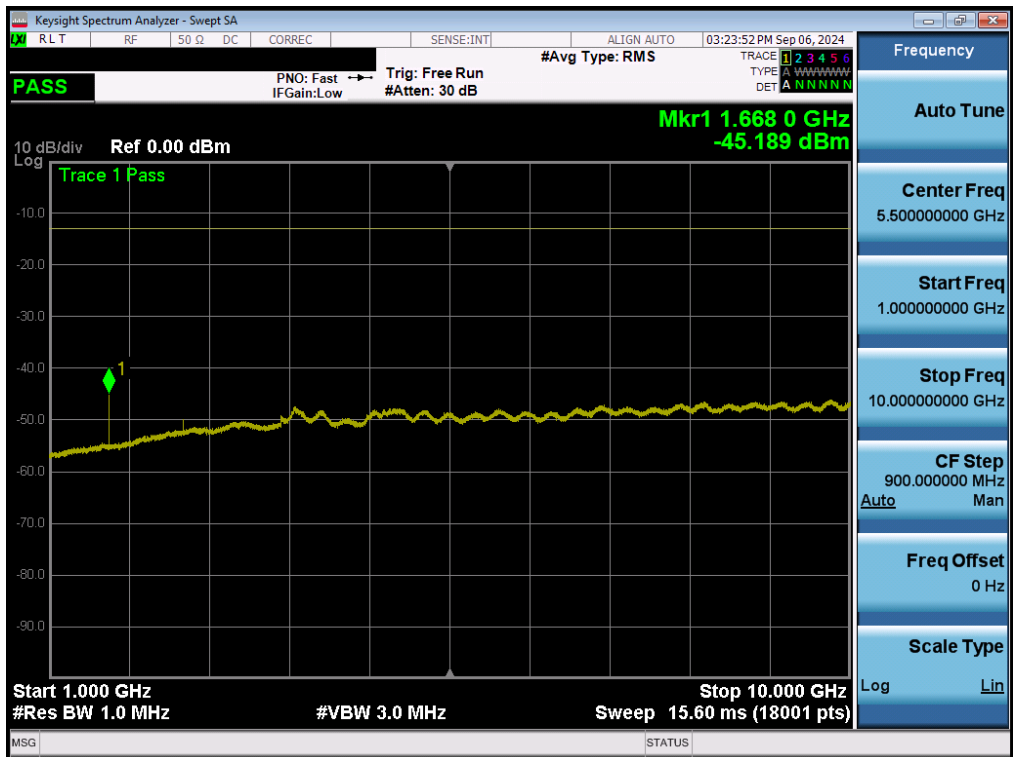

Plot 7-63. Conducted Spurious Plot (NR Band n26/5 - 20.0MHz - 1 RB - Low Channel - Ant1)


FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 50 of 102

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
GSM-Cell	250kHz	Low	30.0 - 823.0	-32.52	-13.0	-19.52
		Low	849.0 - 1000.0	-56.56	-13.0	-43.56
		Low	1000.0 - 10000.0	-29.80	-13.0	-16.80
		Mid	30.0 - 824.0	-53.99	-13.0	-40.98
		Mid	849.0 - 1000.0	-56.97	-13.0	-43.96
		Mid	1000.0 - 10000.0	-29.04	-13.0	-16.04
		High	30.0 - 824.0	-54.02	-13.0	-41.02
		High	850.0 - 1000.0	-33.58	-13.0	-20.58
		High	1000.0 - 10000.0	-29.79	-13.0	-16.79
WCDMA-Cell	5MHz	Low	30.0 - 823.0	-27.07	-13.0	-14.07
		Low	849.0 - 1000.0	-65.37	-13.0	-52.37
		Low	1000.0 - 10000.0	-47.30	-13.0	-34.30
		Mid	30.0 - 824.0	-56.46	-13.0	-43.46
		Mid	849.0 - 1000.0	-57.17	-13.0	-44.17
		Mid	1000.0 - 10000.0	-47.35	-13.0	-34.35
		High	30.0 - 824.0	-64.86	-13.0	-51.86
		High	850.0 - 1000.0	-29.31	-13.0	-16.31
		High	1000.0 - 10000.0	-47.35	-13.0	-34.35
LTE-B26-5	10MHz	Low	30.0 - 823.0	-61.90	-13.0	-48.90
		Low	849.0 - 1000.0	-65.45	-13.0	-52.45
		Low	1000.0 - 10000.0	-45.06	-13.0	-32.06
		Mid	30.0 - 824.0	-64.92	-13.0	-51.92
		Mid	849.0 - 1000.0	-65.20	-13.0	-52.20
		Mid	1000.0 - 10000.0	-45.19	-13.0	-32.19
		High	30.0 - 824.0	-65.30	-13.0	-52.30
		High	850.0 - 1000.0	-62.91	-13.0	-49.91
		High	1000.0 - 10000.0	-46.08	-13.0	-33.08
NR-n26-5	20MHz	Low	30.0 - 824.0	-59.92	-13.0	-46.91
		Low	849.0 - 1000.0	-63.79	-13.0	-50.79
		Low	1000.0 - 10000.0	-45.89	-13.0	-32.89
		Mid	30.0 - 824.0	-61.81	-13.0	-48.81
		Mid	849.0 - 1000.0	-62.77	-13.0	-49.77
		Mid	1000.0 - 10000.0	-45.87	-13.0	-32.87
		High	30.0 - 824.0	-62.28	-13.0	-49.28
		High	849.0 - 1000.0	-62.67	-13.0	-49.67
		High	1000.0 - 10000.0	-45.94	-13.0	-32.94


Table 7-9. Conducted Spurious Emissions Results – Ant2

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 51 of 102

GSM/GPRS Cell – Ant2

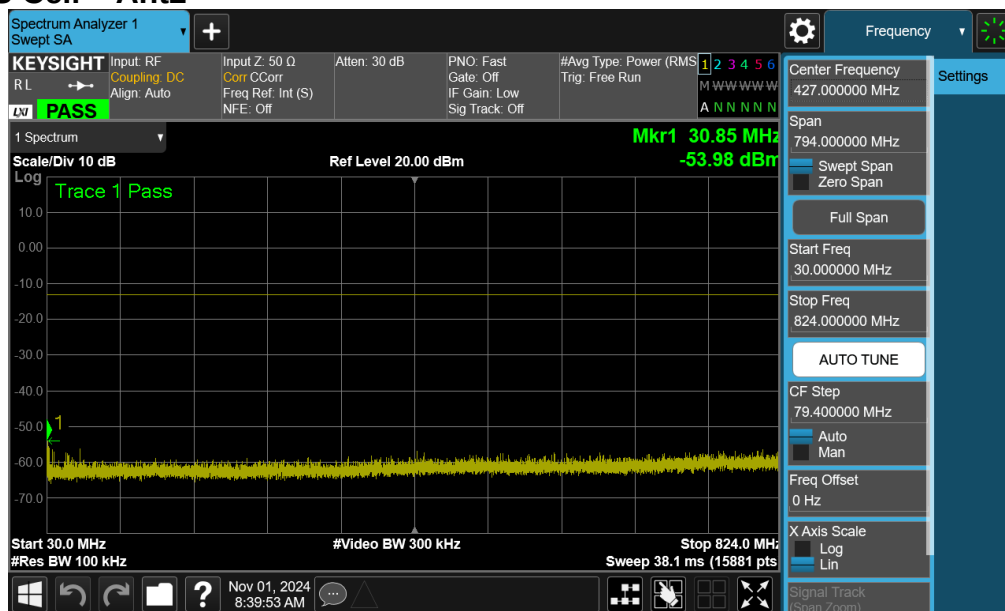


Plot 7-64. Conducted Spurious Plot (GPRS Ch. 128 – Ant2)

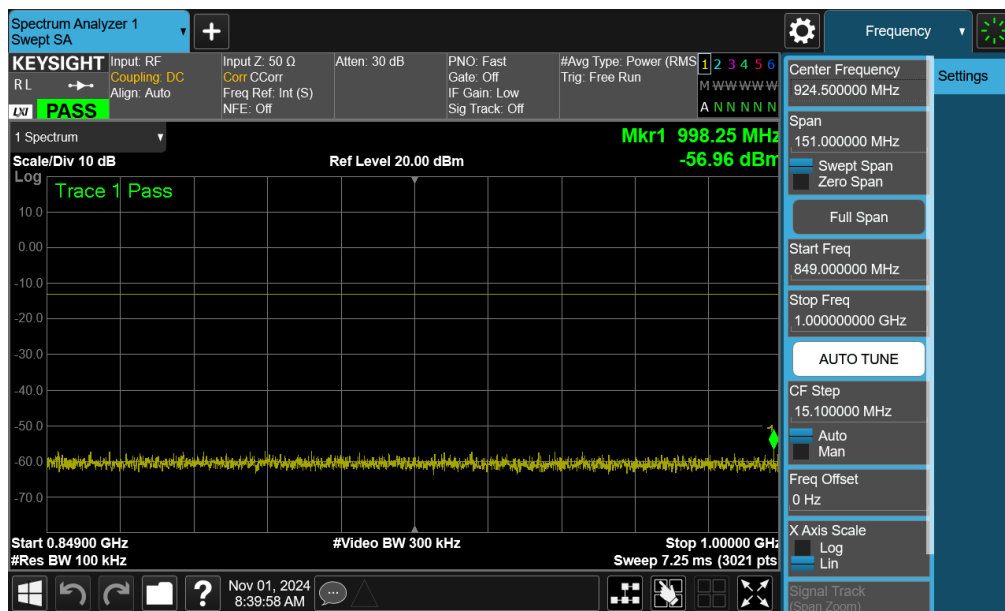

Plot 7-65. Conducted Spurious Plot (GPRS Ch. 128 – Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 52 of 102

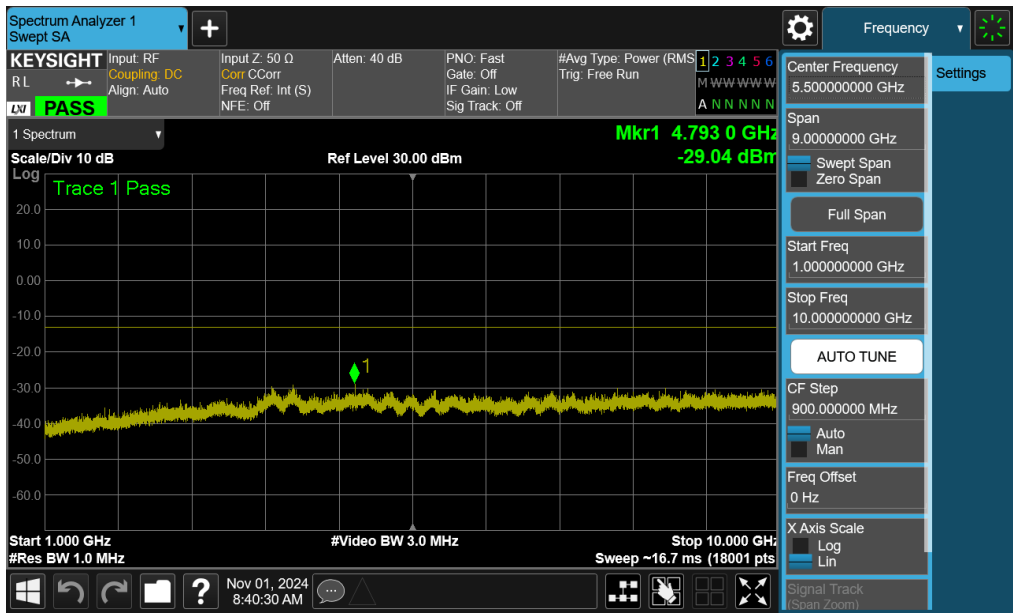

Plot 7-66. Conducted Spurious Plot (GPRS Ch. 128 – Ant2)

FCC ID: A3LSMS938B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-04.A3L	Test Dates: 09/06/2024 - 11/08/2024	EUT Type: Portable Handset	Page 53 of 102