


Plot 7-75. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 3) – Ch. 157)



Plot 7-76. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 3) – Ch. 151)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 68 of 105

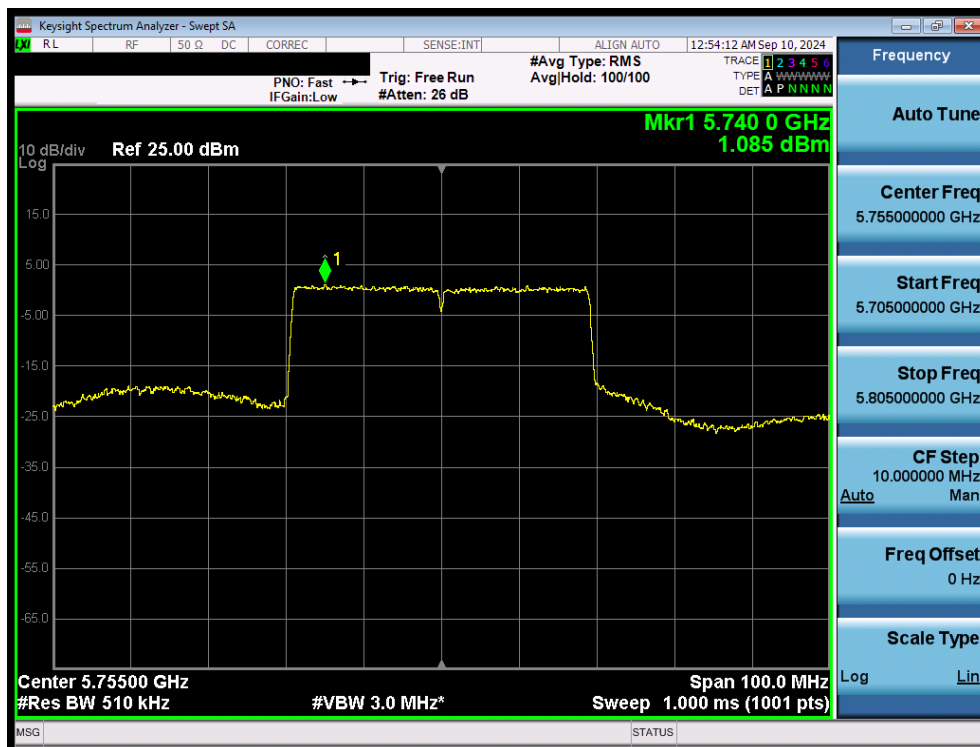

Plot 7-77. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 69 of 105

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna-1 and Antenna-2 were first measured separately with reduced Antenna-1 and Antenna-2 powers per manufacture's tune-up document. The measured values were then summed in linear power units then converted back to dBm.

Sample Directional Gain Calculation:

Assuming the antenna gain is -5.03 dBi for Antenna-1 and -4.87 dBi for Antenna-2.

$$\begin{aligned} \text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{-8.61/20} + 10^{-7.68/20} / 2] \text{ dBi} \\ &= -1.94 \text{ dBi} \end{aligned}$$

Sample MIMO Calculation:

Assuming the average conducted power spectral density was measured to be 7.52 dBm for Antenna-1 and 8.06 dBm for Antenna-2.

$$\text{Antenna-1} + \text{Antenna-2} = \text{MIMO}$$

$$(7.52 \text{ dBm} + 8.06 \text{ dBm}) = (5.651 \text{ mW} + 6.391 \text{ mW}) = 12.042 \text{ mW} = 10.81 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

Assuming the average MIMO power density was calculated to be 10.81 dBm with directional gain of -1.94 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{directional gain (dBi)}$$

$$10.81 \text{ dBm} + (-1.94) \text{ dBi} = 8.87 \text{ dBm}$$

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 70 of 105

7.6 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400√F (kHz)	300
0.490 – 1.705 MHz	24000√F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-28. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10-2013 – Section 12.7.4.4 (Band Edge Measurements)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 71 of 105

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 72 of 105

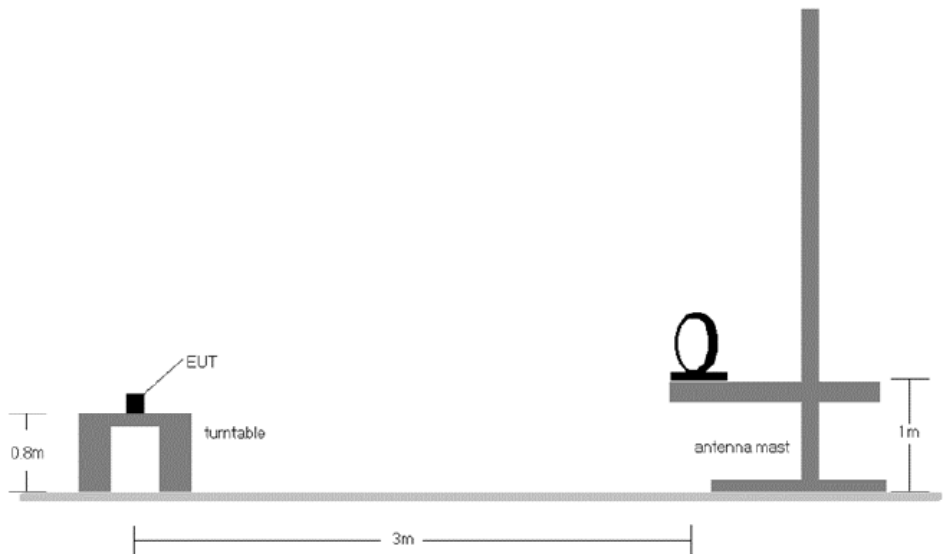


Figure 7-5. Radiated Test Setup < 30MHz

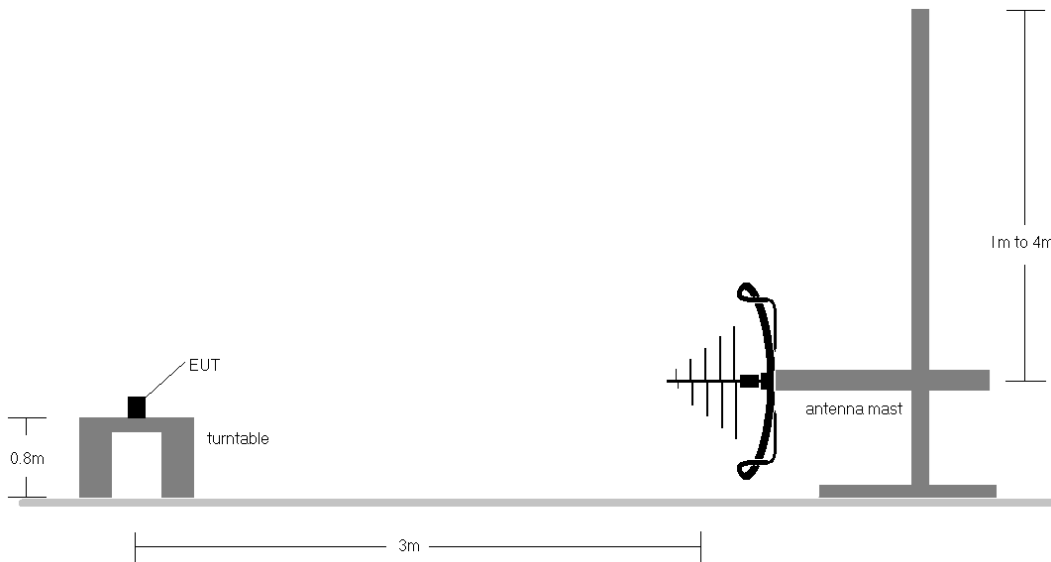


Figure 7-6. Radiated Test Setup < 1GHz

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 73 of 105

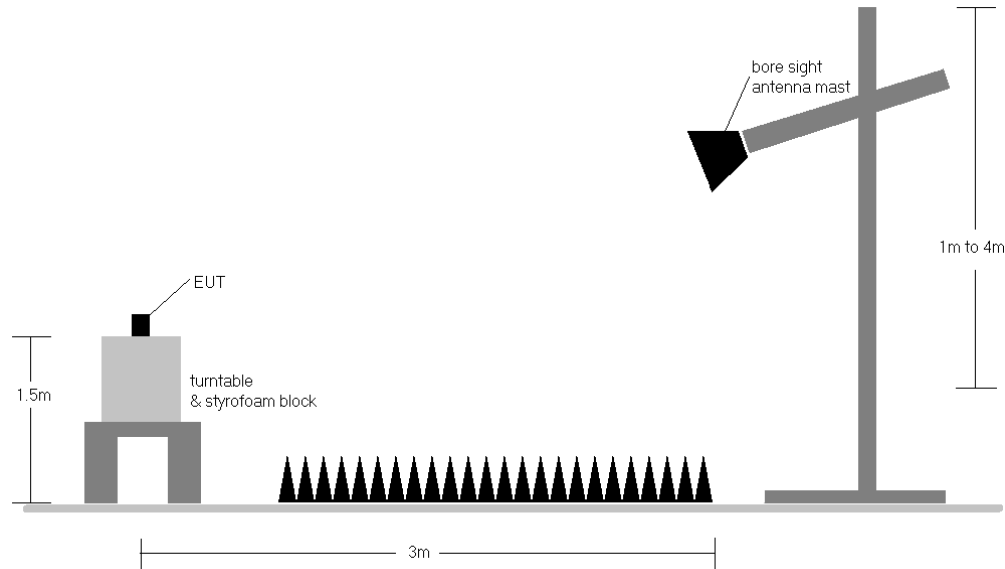


Figure 7-7. Radiated Test Setup > 1GHz

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 74 of 105

9. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
10. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
11. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section Radiated Spurious Emission Measurements – Above 1GHz was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 75 of 105


7.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

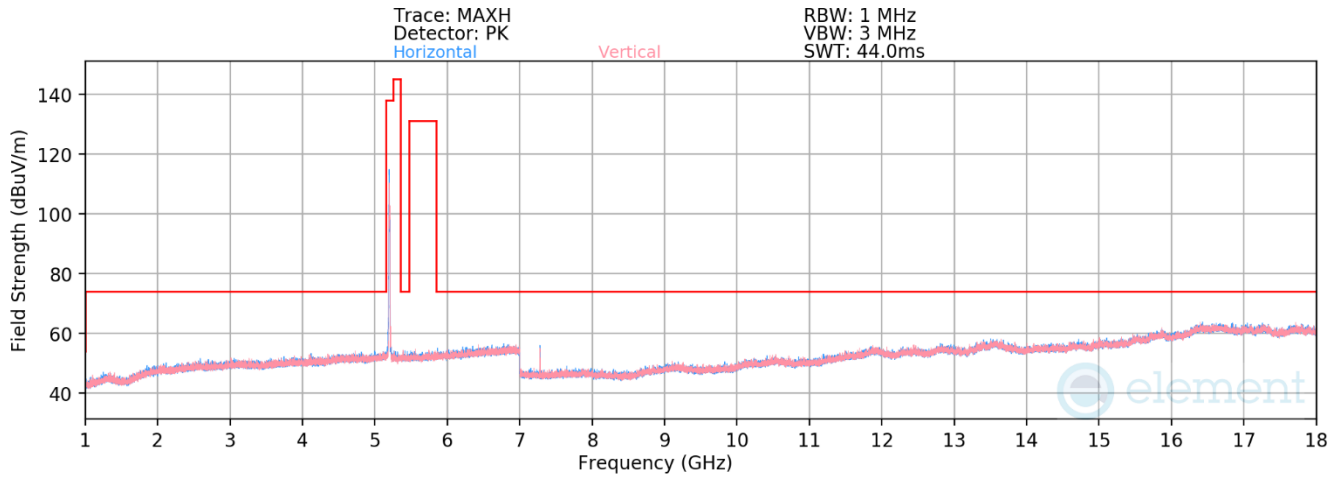

Plot 7-78. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)

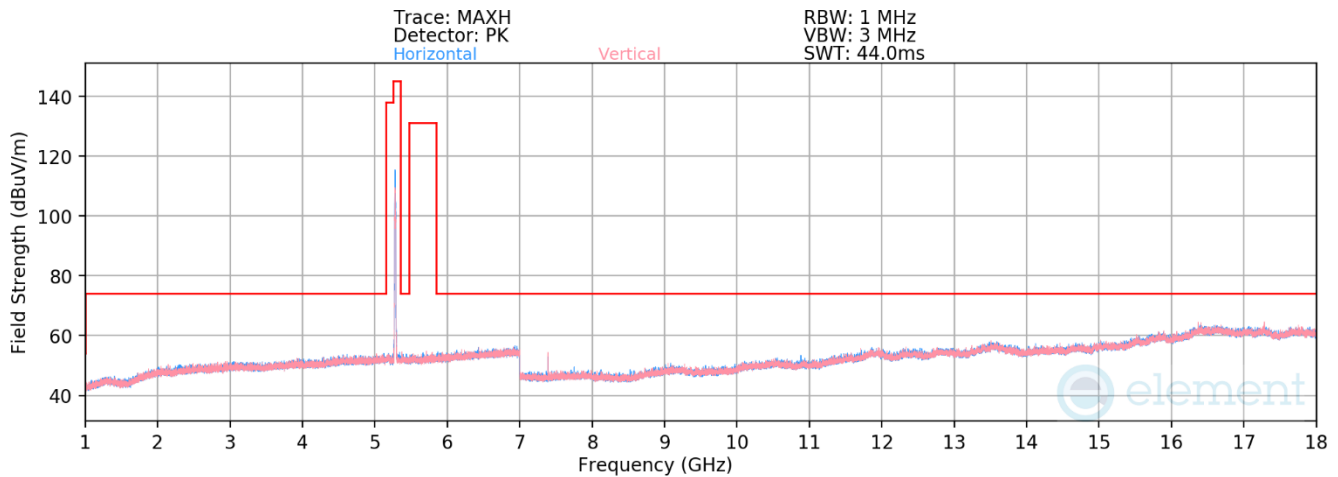


Plot 7-79. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)

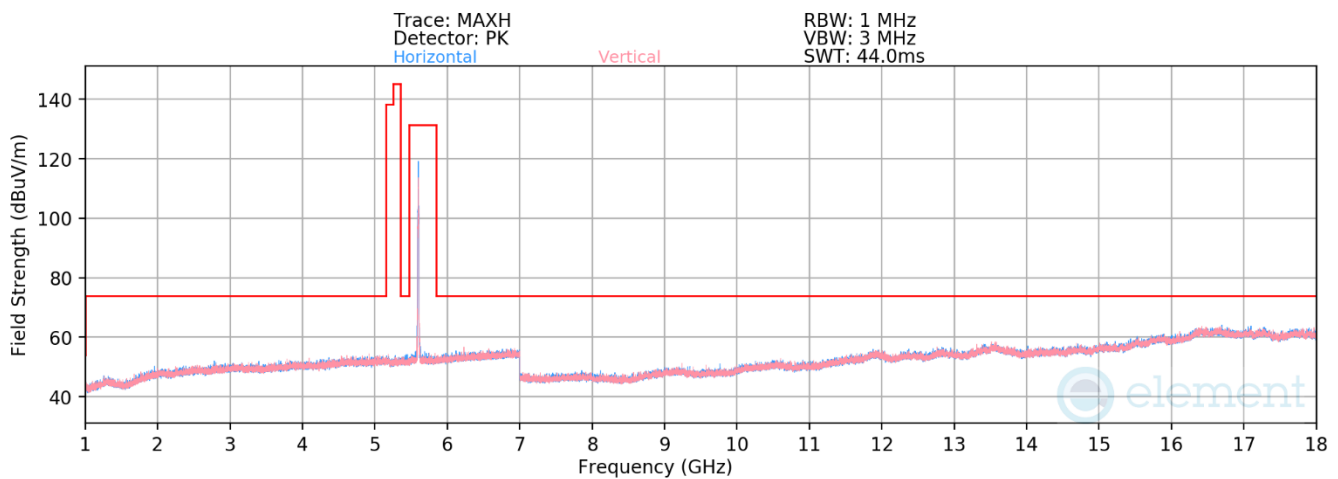


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 76 of 105


Plot 7-80. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)

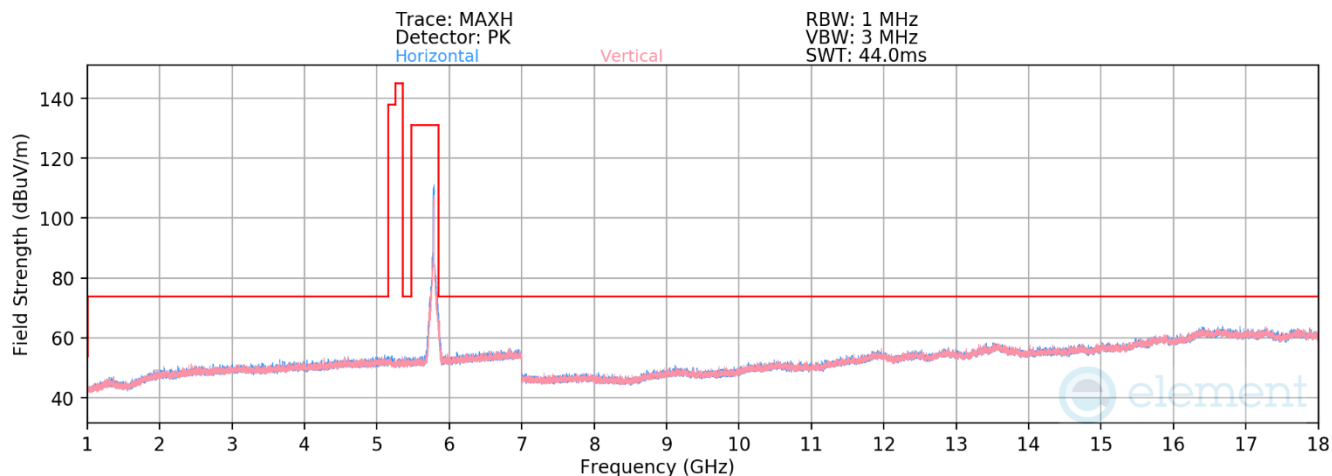

Plot 7-81. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 3 Ch. 157)

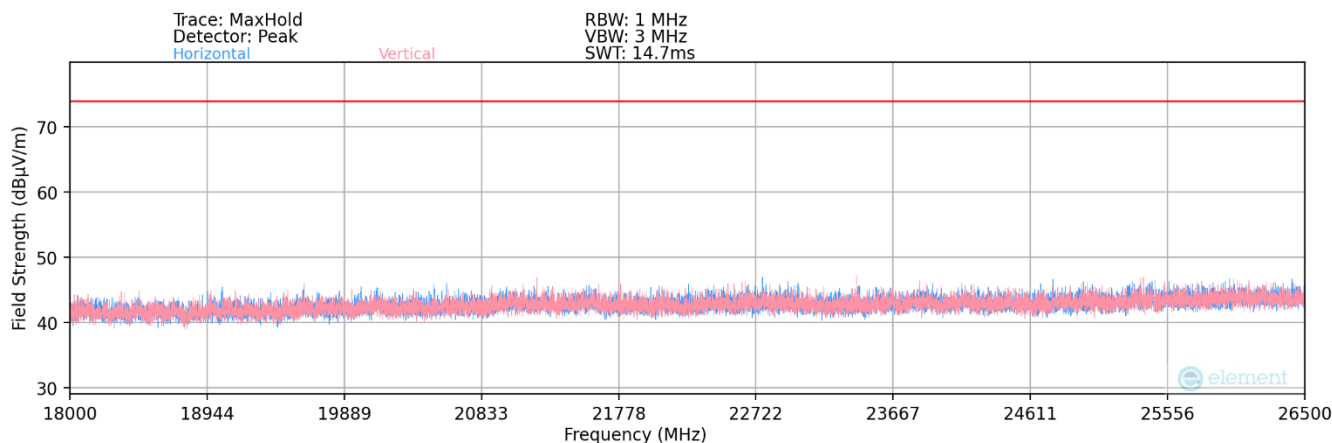

Plot 7-82. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

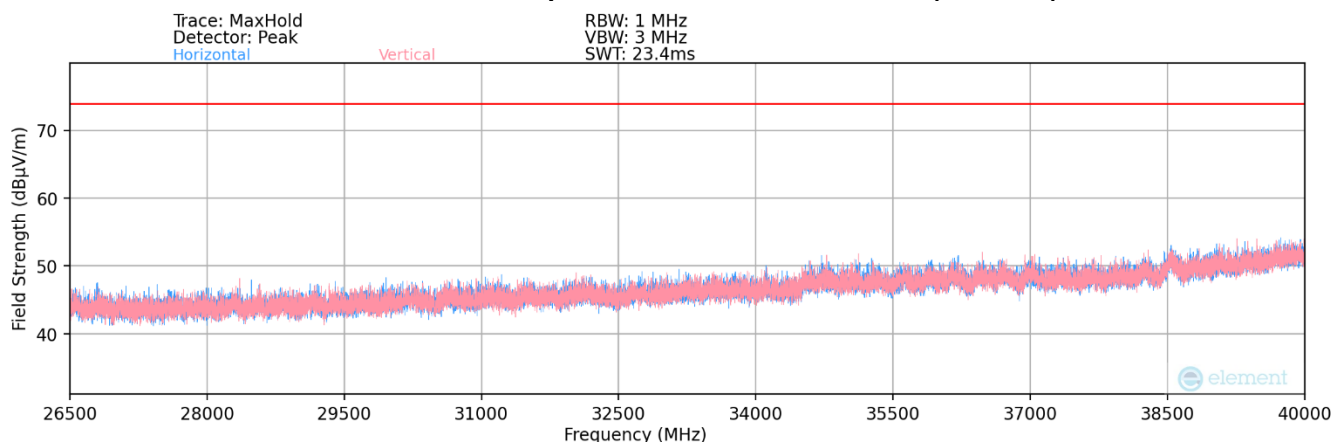

Plot 7-83. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 77 of 105

MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 1

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
802.11ax RU 26T	MIMO	1	36	5180	4	*	7252.00	Average	H	100	129	-71.25	14.59	50.34	53.98	-3.64
						*	7252.00	Peak	H	100	129	-63.03	14.59	58.56	73.98	-15.42
							10360.00	Peak	V	-	-	-73.61	18.09	51.48	68.20	-16.72
						*	15540.00	Average	H	-	-	-86.00	27.24	48.24	53.98	-5.74
						*	15540.00	Peak	H	-	-	-74.15	27.24	60.09	73.98	-13.89
			40	5200	4	*	7280.00	Average	H	103	129	-71.68	14.22	49.54	53.98	-4.44
						*	7280.00	Peak	H	103	129	-63.06	14.22	58.16	73.98	-15.82
							10400.00	Peak	V	-	-	-73.13	17.95	51.82	68.20	-16.38
						*	15600.00	Average	H	-	-	-85.87	26.86	47.99	53.98	-5.99
						*	15600.00	Peak	H	-	-	-73.63	26.84	60.21	73.98	-13.77
						*	7336.00	Average	V	102	61	-73.29	14.23	47.94	53.98	-6.04
						*	7336.00	Peak	V	102	61	-63.54	14.23	57.69	73.98	-16.29
							10480.00	Peak	H	-	-	-73.73	18.30	51.57	68.20	-16.63
						*	15720.00	Average	V	-	-	-86.79	28.61	48.82	53.98	-5.16
						*	15720.00	Peak	V	-	-	-73.49	27.64	61.15	73.98	-12.83
			48	5240	4											

Table 7-29. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 78 of 105

MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2A

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 26T	MIMO	2A	52	5260	4	*	7364.00	Average	V	112	61	-73.59	14.24	47.65	53.98	-6.33
						*	7364.00	Peak	V	112	61	-62.75	14.24	58.49	73.98	-15.49
							10520.00	Peak	V	-	-	-72.79	18.59	52.80	68.20	-15.40
						*	15780.00	Average	H	-	-	-86.41	28.52	49.11	53.98	-4.87
			56	5280	4	*	15780.00	Peak	H	-	-	-75.46	28.52	60.06	73.98	-13.92
						*	7392.00	Average	V	108	60	-74.71	14.23	46.52	53.98	-7.46
						*	7392.00	Peak	V	108	60	-64.64	14.23	56.59	73.98	-17.39
							10560.00	Peak	V	-	-	-73.28	18.59	52.31	68.20	-15.89
						*	15840.00	Average	H	-	-	-86.28	28.71	49.43	53.98	-4.55
						*	15840.00	Peak	H	-	-	-75.34	28.71	60.37	73.98	-13.61
						*	7448.00	Average	V	100	60	-74.47	14.08	46.61	53.98	-7.37
						*	7448.00	Peak	V	100	60	-65.52	14.08	55.56	73.98	-18.42
			64	5320	4	*	10640.00	Average	H	-	-	-84.50	18.37	40.87	53.98	-13.11
						*	10640.00	Peak	H	-	-	-73.37	18.62	52.25	73.98	-21.73
						*	15960.00	Average	V	-	-	-85.84	28.00	49.16	53.98	-4.82
						*	15960.00	Peak	V	-	-	-75.04	28.01	59.97	73.98	-14.01

Table 7-30. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 79 of 105

MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2C

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 26T	MIMO	2C	100	5500	4	*	7700.00	Average	V	106	73	-78.72	14.32	42.60	53.98	-11.38
						*	7700.00	Peak	V	106	73	-68.56	14.29	52.73	73.98	-21.25
						*	11000.00	Average	V	-	-	-85.63	19.08	40.45	53.98	-13.53
						*	11000.00	Peak	V	-	-	-74.08	19.06	51.98	73.98	-22.00
						*	16500.00	Peak	V	-	-	-74.19	29.65	62.46	68.20	-5.74
						*	7840.00	Peak	V	105	80	-71.21	14.11	49.90	68.20	-18.30
			120	5600	4	*	11200.00	Average	V	-	-	-85.30	19.45	41.15	53.98	-12.83
						*	11200.00	Peak	V	-	-	-74.09	19.45	52.36	73.98	-21.62
						*	16800.00	Peak	H	-	-	-73.81	29.56	62.75	68.20	-5.45
			144	5720	4	*	11440.00	Average	H	-	-	-85.16	19.80	41.64	53.98	-12.34
						*	11440.00	Peak	H	-	-	-73.22	19.80	53.58	73.98	-20.40
						*	17160.00	Peak	V	-	-	-74.72	29.84	62.12	68.20	-6.08

Table 7-31. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 80 of 105


MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 3

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 26T	MIMO	3	149	5745	4	*	11490.00	Average	H	-	-	-84.78	20.05	42.27	53.98	-11.71
						*	11490.00	Peak	H	-	-	-73.91	20.21	53.30	73.98	-20.68
							17235.00	Peak	V	-	-	-74.01	30.05	63.04	68.20	-5.16
			157	5785	4	*	11570.00	Average	V	-	-	-84.97	20.62	42.65	53.98	-11.33
						*	11570.00	Peak	V	-	-	-73.21	19.95	53.74	73.98	-20.24
							17355.00	Peak	V	-	-	-73.56	30.22	63.66	68.20	-4.54
			165	5825	4	*	11650.00	Average	V	-	-	-84.93	20.44	42.51	53.98	-11.47
						*	11650.00	Peak	V	-	-	-73.43	20.29	53.86	73.98	-20.12
							17475.00	Peak	V	-	-	-74.14	29.63	62.49	68.20	-5.71


Table 7-32. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 81 of 105

7.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

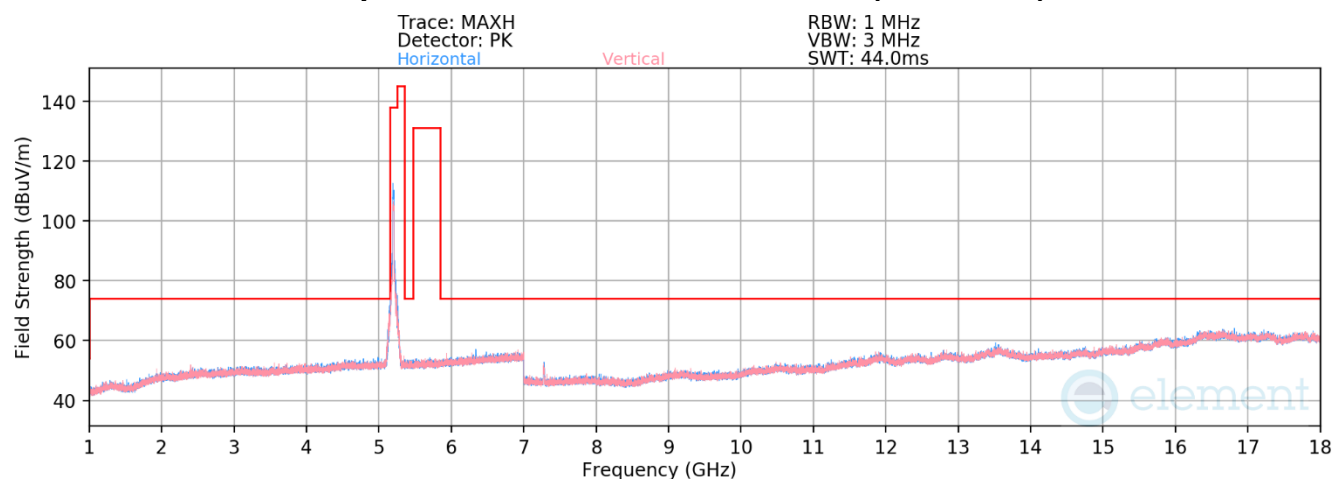


Plot 7-84. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)

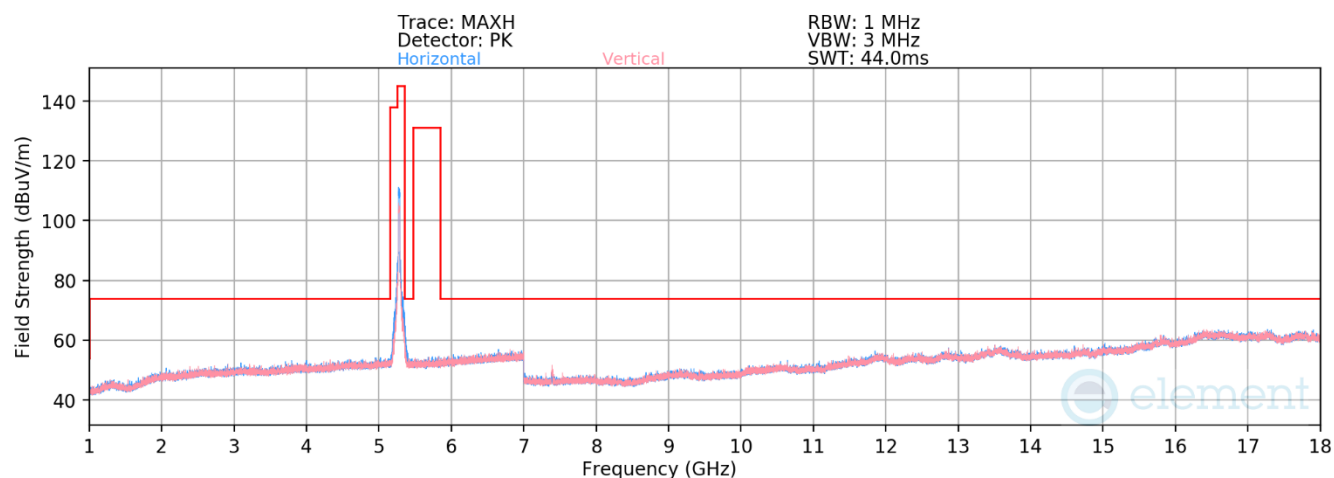


Plot 7-85. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 82 of 105

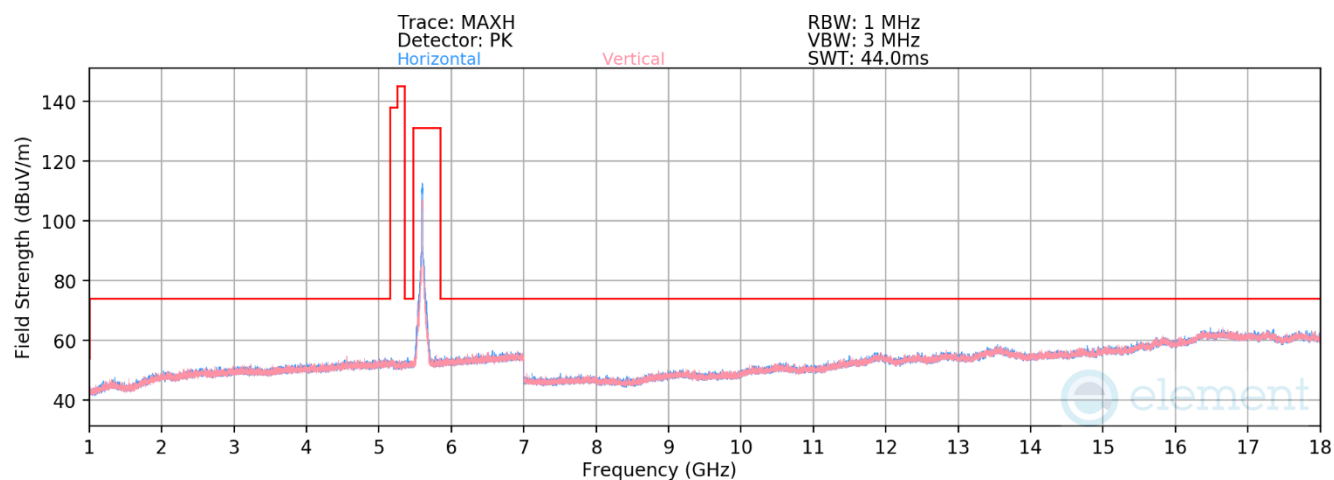


Plot 7-86. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)

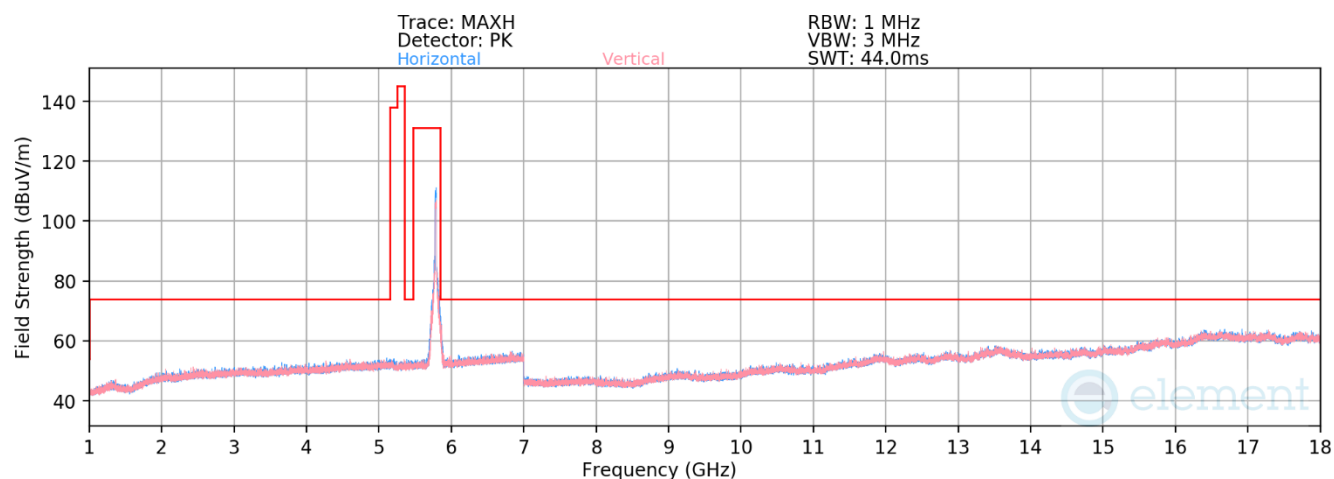


Plot 7-87. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 3 Ch. 157)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 83 of 105

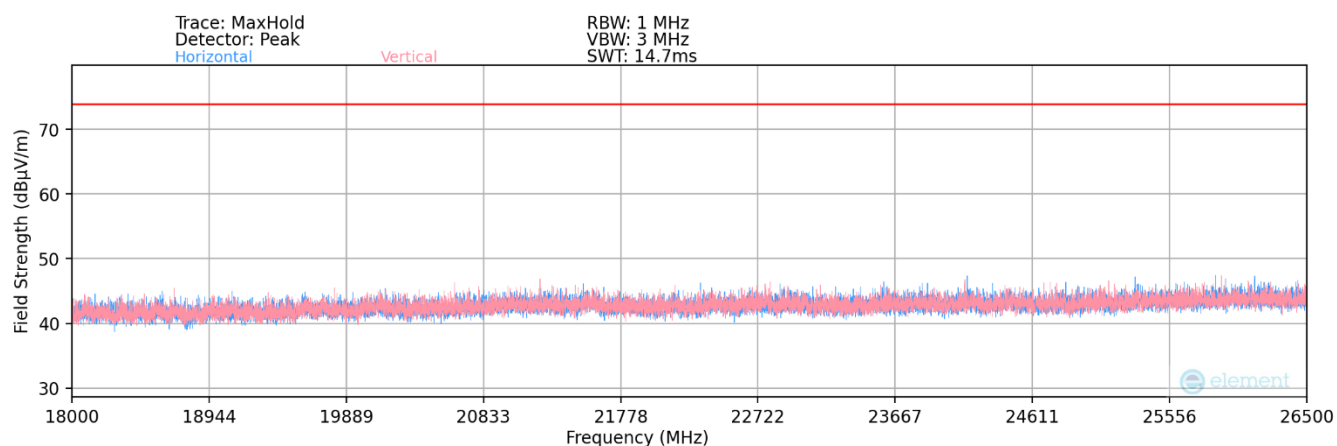

Plot 7-88. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

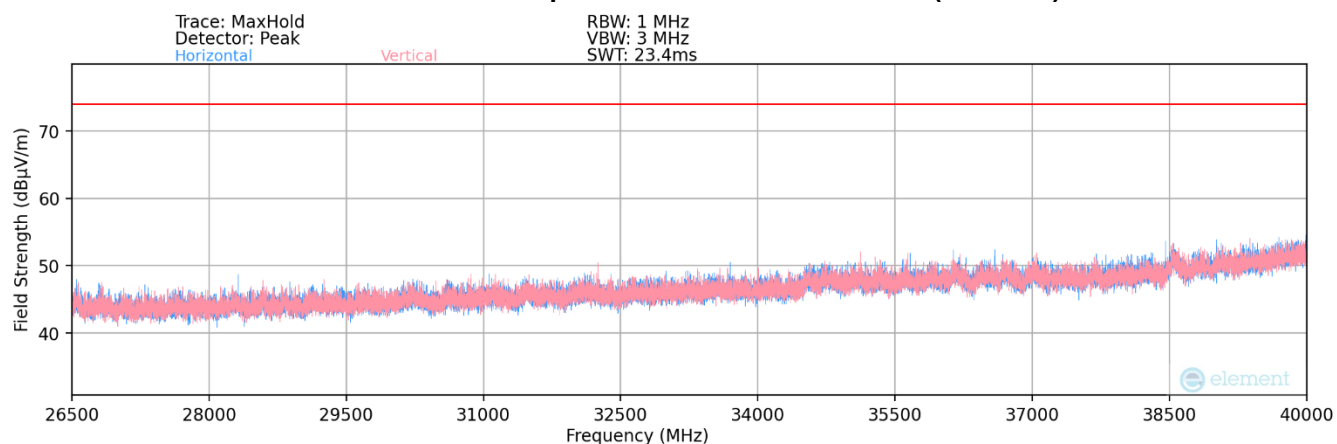

Plot 7-89. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 84 of 105

MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 1

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax RU 242T	MIMO	1	36	5180	61		7255.00	Average	V	110	61	-78.76	14.56	42.80	53.98	-11.18
							7255.00	Peak	V	110	61	-67.62	14.56	53.94	73.98	-20.04
							10360.00	Peak	H	-	-	-72.92	17.66	51.74	68.20	-16.46
						*	15540.00	Average	H	-	-	-85.55	27.27	48.72	53.98	-5.26
			40	5200	61	*	15540.00	Peak	H	-	-	-74.52	27.24	59.72	73.98	-14.26
							7282.00	Average	V	100	59	-78.45	14.22	42.77	53.98	-11.21
							7282.00	Peak	V	100	59	-67.11	14.22	54.11	73.98	-19.87
							10400.00	Peak	H	-	-	-73.62	17.95	51.33	68.20	-16.87
			48	5240	61	*	15600.00	Average	H	-	-	-85.93	26.86	47.93	53.98	-6.05
						*	15600.00	Peak	H	-	-	-74.57	26.73	59.16	73.98	-14.82
							7335.00	Average	V	100	74	-78.91	14.23	42.32	53.98	-11.66
							7335.00	Peak	V	100	74	-68.13	14.23	53.10	73.98	-20.88
							10480.00	Peak	V	-	-	-73.54	18.17	51.63	68.20	-16.57
						*	15720.00	Average	H	-	-	-86.88	28.61	48.73	53.98	-5.25
						*	15720.00	Peak	H	-	-	-75.23	28.61	60.38	73.98	-13.60

Table 7-33. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 85 of 105

MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 2A

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 242T	MIMO	2A	52	5260	61		7359.00	Average	V	100	57	-78.55	14.24	42.69	53.98	-11.29
							7359.00	Peak	V	100	57	-68.34	14.24	52.90	73.98	-21.08
							10520.00	Peak	H	-	-	-73.54	18.30	51.76	68.20	-16.44
						*	15780.00	Average	V	-	-	-86.49	28.09	48.60	53.98	-5.38
			56	5280	61	*	15780.00	Peak	V	-	-	-74.43	28.09	60.66	73.98	-13.32
							7394.00	Average	V	100	56	-94.89	28.58	40.69	53.98	-13.29
							7394.00	Peak	V	100	56	-84.68	28.59	50.91	73.98	-23.07
							10560.00	Peak	V	-	-	-73.81	18.81	52.00	68.20	-16.20
			64	5320	61	*	15840.00	Average	V	-	-	-71.56	14.23	49.67	53.98	-4.31
						*	15840.00	Peak	V	-	-	-60.00	14.12	61.12	73.98	-12.86
						*	7448.00	Average	V	101	70	-79.44	14.04	41.60	53.98	-12.38
						*	7448.00	Peak	V	101	70	-68.67	14.04	52.37	73.98	-21.61
						*	10640.00	Average	H	-	-	-85.13	18.62	40.49	53.98	-13.49
						*	10640.00	Peak	H	-	-	-73.89	18.94	52.05	73.98	-21.93
						*	15960.00	Average	V	-	-	-86.03	28.00	48.97	53.98	-5.01
						*	15960.00	Peak	V	-	-	-74.49	28.17	60.68	73.98	-13.30

Table 7-34. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 86 of 105

MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 2C

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 242T	MIMO	2C	100	5500	61	*	11000.00	Average	H	-	-	-85.60	18.99	40.39	53.98	-13.59
						*	11000.00	Peak	H	-	-	-74.39	18.99	51.60	73.98	-22.38
							16500.00	Peak	V	-	-	-74.07	29.65	62.58	68.20	-5.62
			120	5600	61	*	11200.00	Average	V	-	-	-85.15	19.45	41.30	53.98	-12.68
						*	11200.00	Peak	V	-	-	-73.75	19.52	52.77	73.98	-21.21
							16800.00	Peak	H	-	-	-73.32	29.56	63.24	68.20	-4.96
			144	5720	61	*	11440.00	Average	V	-	-	-85.45	20.24	41.79	53.98	-12.19
						*	11440.00	Peak	V	-	-	-73.95	20.24	53.29	73.98	-20.69
							17160.00	Peak	V	-	-	-74.20	29.84	62.64	68.20	-5.56

Table 7-35. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 87 of 105

MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 3


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 242T	MIMO	3	149	5745	61	*	11490.00	Average	V	-	-	-84.76	19.77	42.01	53.98	-11.97
						*	11490.00	Peak	V	-	-	-73.22	19.63	53.41	73.98	-20.57
							17235.00	Peak	H	-	-	-74.33	30.15	62.82	68.20	-5.38
			157	5785	61	*	11570.00	Average	H	-	-	-84.88	20.43	42.55	53.98	-11.43
						*	11570.00	Peak	H	-	-	-74.19	20.54	53.35	73.98	-20.63
							17355.00	Peak	V	-	-	-74.09	30.37	63.28	68.20	-4.92
			165	5825	61	*	11650.00	Average	H	-	-	-84.92	20.28	42.36	53.98	-11.62
						*	11650.00	Peak	H	-	-	-72.60	19.91	54.31	73.98	-19.67
							17475.00	Peak	V	-	-	-74.52	29.98	62.46	68.20	-5.74

Table 7-36. Radiated Measurements MIMO (242 Tones)


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 88 of 105

7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

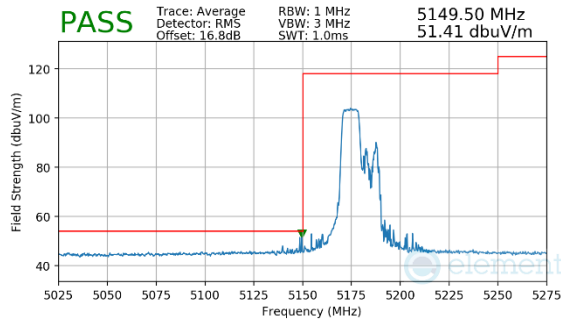


Plot 7-90. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 106 Tones)

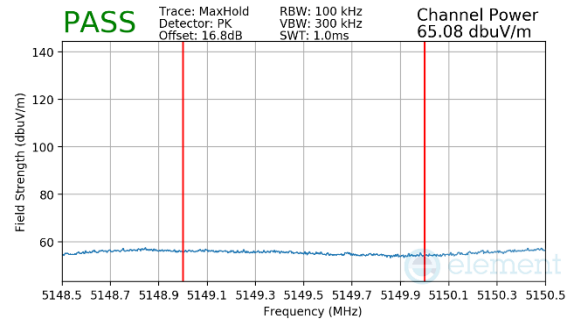


Plot 7-91. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 106 Tones)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

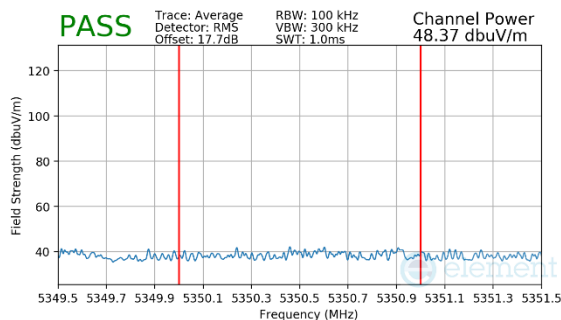


Plot 7-92. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 106 Tones)

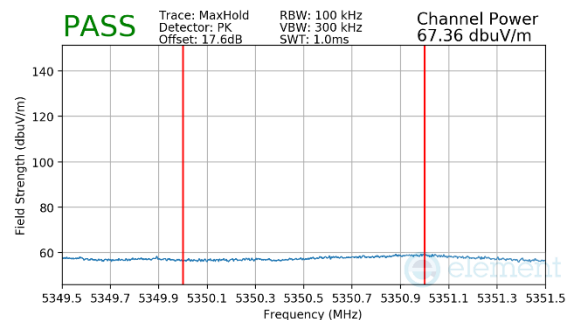


Plot 7-93. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 106 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 89 of 105

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

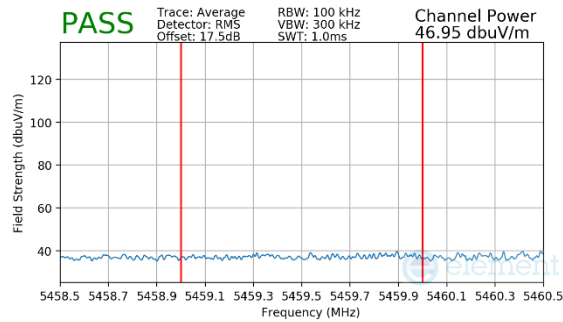


**Plot 7-94. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 2C – 106 Tones)**

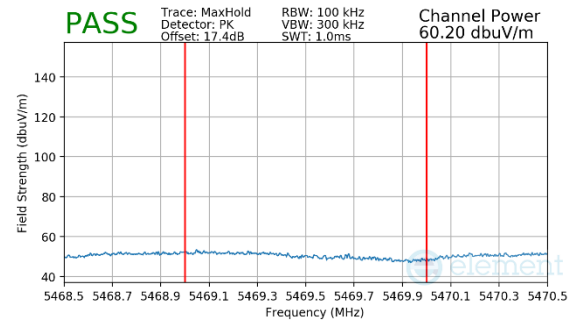

**Plot 7-95. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 2C – 106 Tones)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

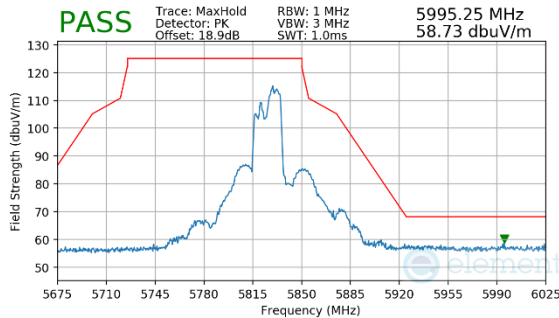


**Plot 7-96. Radiated Upper Band Edge Plot MIMO
(Peak – UNII Band 3 – 106 Tones)**


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 90 of 105

7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

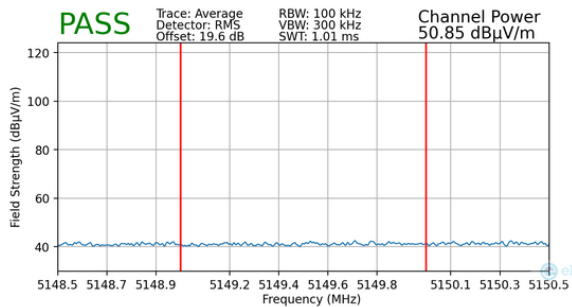


Plot 7-97. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 106+26 Tones)

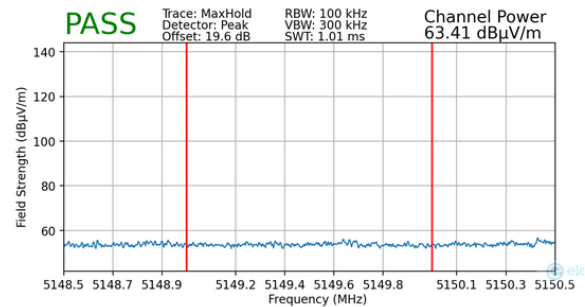


Plot 7-98. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 106+26 Tones)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

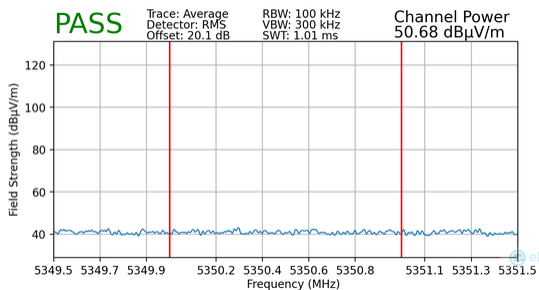


Plot 7-99. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 106+26 Tones)

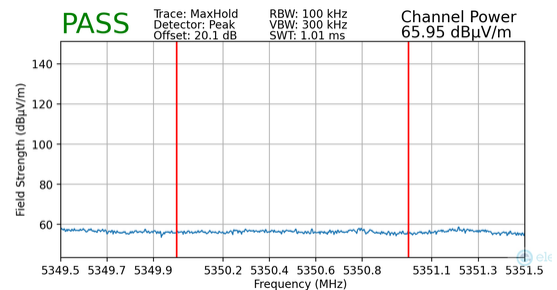


Plot 7-100. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 106+26 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 91 of 105

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

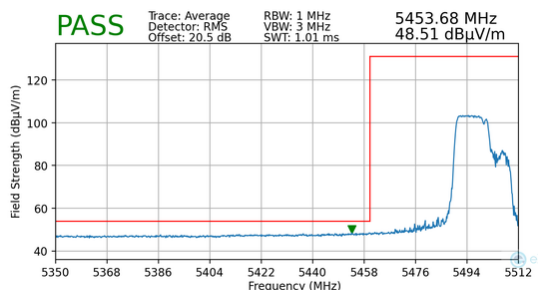


**Plot 7-101. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 2C – 106+26 Tones)**

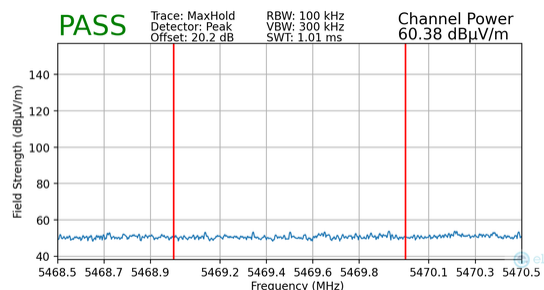

**Plot 7-102. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 2C – 106+26 Tones)**

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

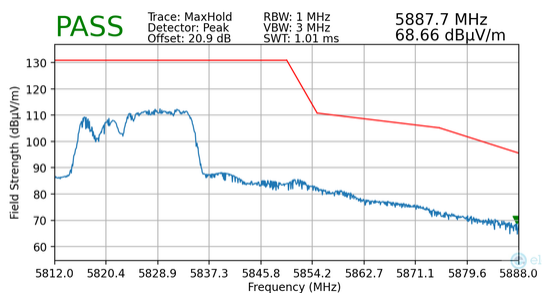


**Plot 7-103. Radiated Upper Band Edge Plot MIMO
(Peak – UNII Band 3 – 106+26 Tones)**


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 92 of 105

7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

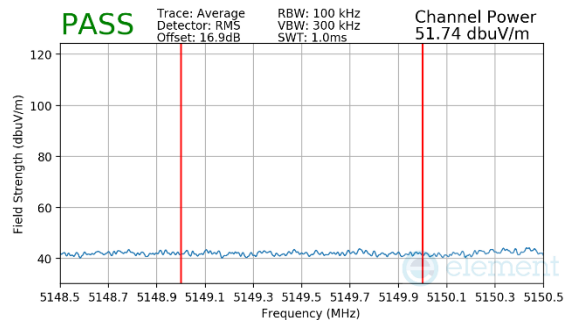


Plot 7-104. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 242 Tones)

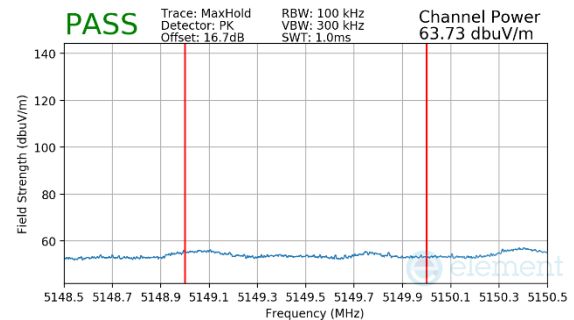


Plot 7-105. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 242 Tones)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

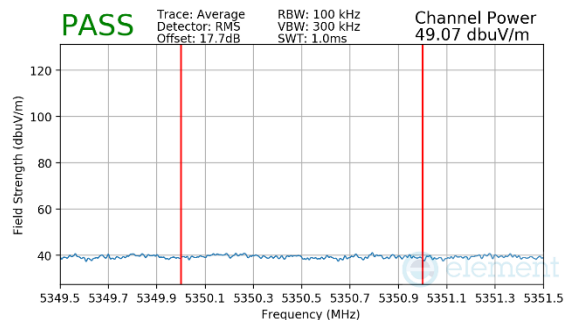


Plot 7-106. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 242 Tones)

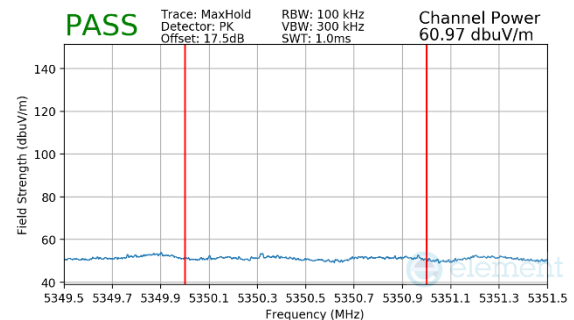


Plot 7-107. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 242 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 93 of 105

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

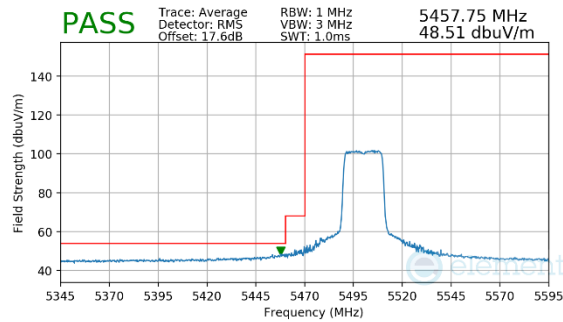


**Plot 7-108. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 2C – 242 Tones)**

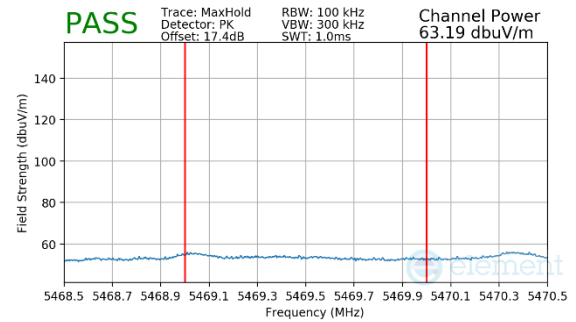

**Plot 7-109. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 2C – 242 Tones)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

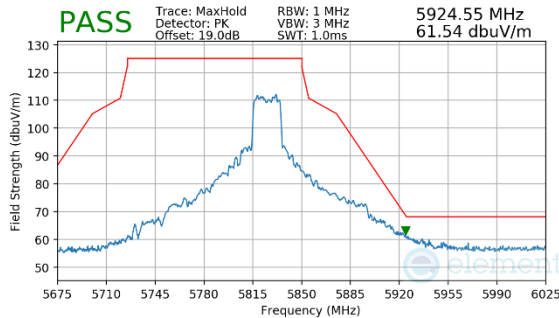


**Plot 7-110. Radiated Upper Band Edge Plot MIMO
(Peak – UNII Band 3 – 242 Tones)**


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 94 of 105

7.6.6 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	65
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

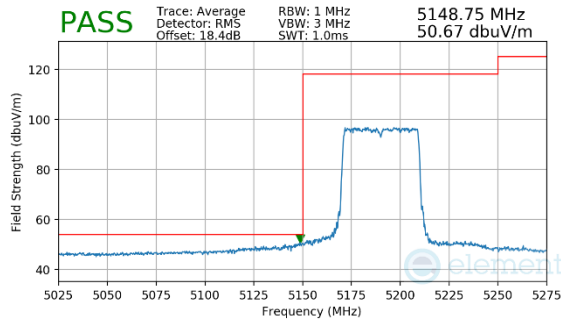


Plot 7-111. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 484 Tones)

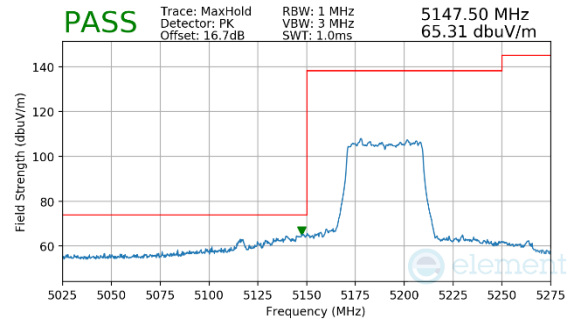


Plot 7-112. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 484 Tones)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	65
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

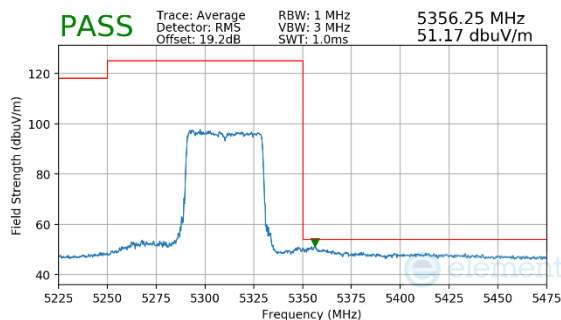


Plot 7-113. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 484 Tones)

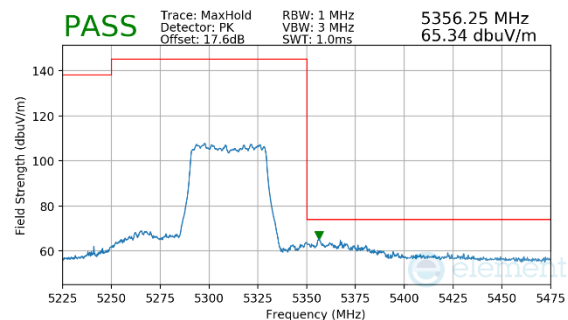


Plot 7-114. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 484 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 95 of 105

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

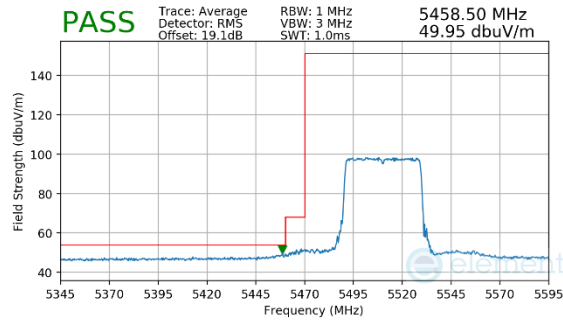


Plot 7-115. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 484 Tones)

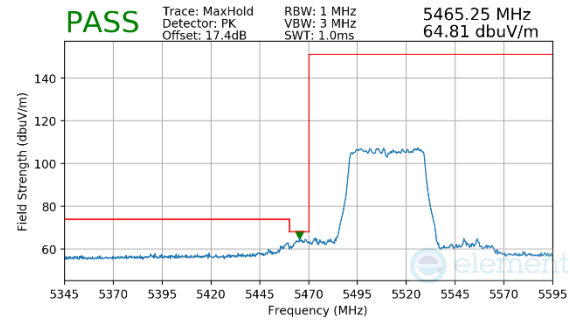

Plot 7-116. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 484 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

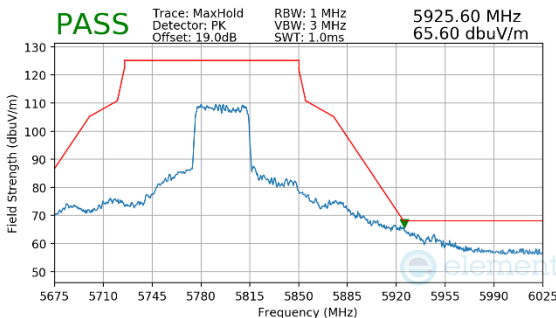


Plot 7-117. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 484 Tones)


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 96 of 105

7.6.7 MIMO Radiated Band Edge Measurements (80MHz BW – Partial Tones – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	92
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

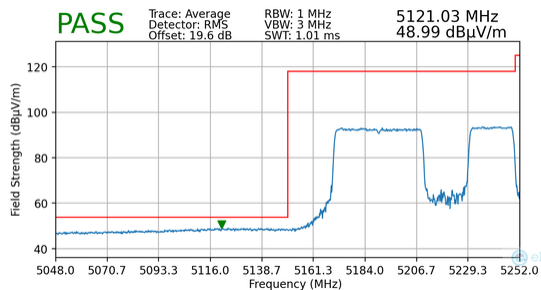


Plot 7-118. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 484+242 Tones)

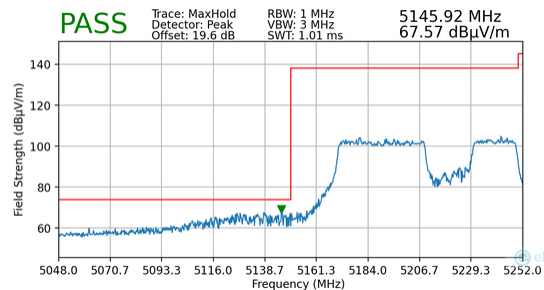


Plot 7-119. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 484+242 Tones)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	91
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

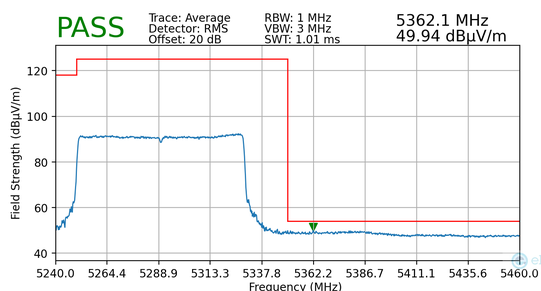


Plot 7-120. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 484+242 Tones)

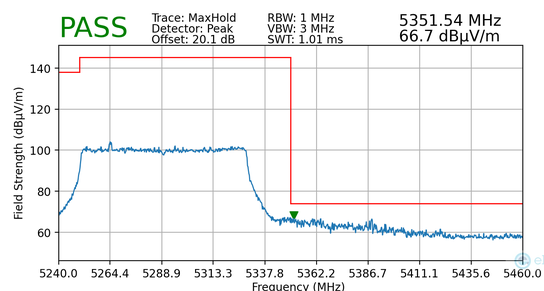


Plot 7-121. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 484+242 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 97 of 105

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 5530MHz
Channel: 106

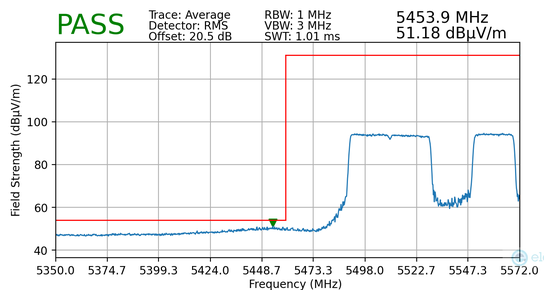


Plot 7-122. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 484+242 Tones)

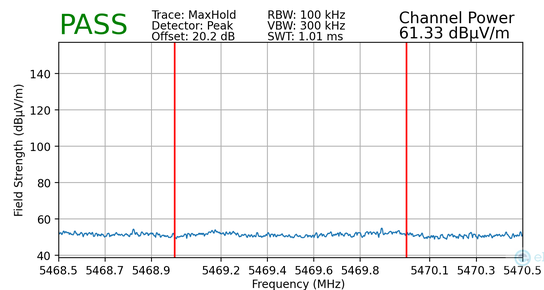

Plot 7-123. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 484+242 Tones)

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 5775MHz
Channel: 155

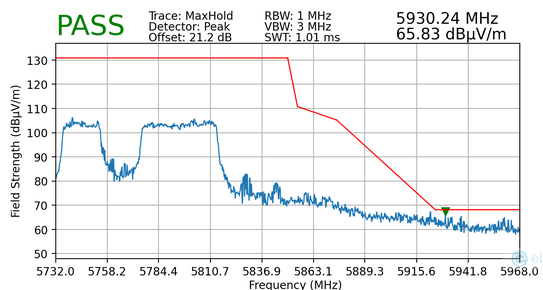


Plot 7-124. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 484+242 Tones)


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 98 of 105

7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	67
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

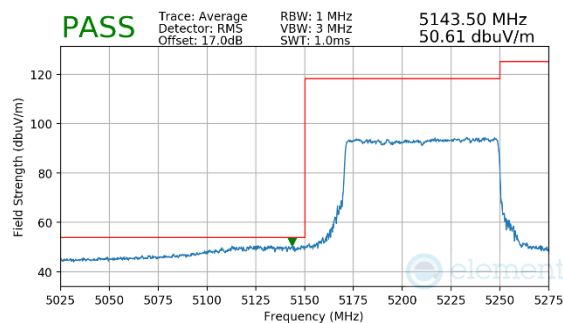


Plot 7-125. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 996 Tones)

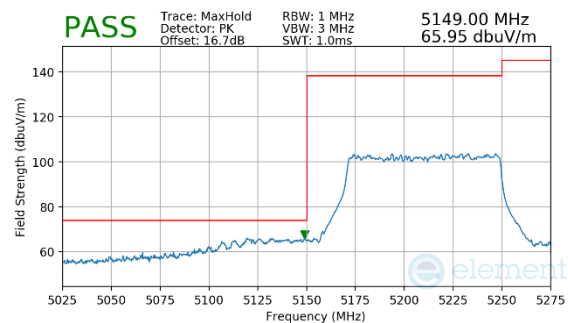


Plot 7-126. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 996 Tones)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	67
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

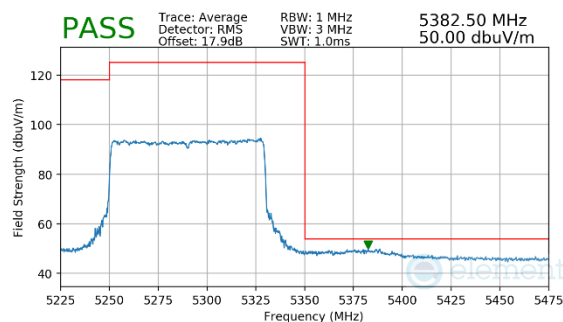


Plot 7-127. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 996 Tones)

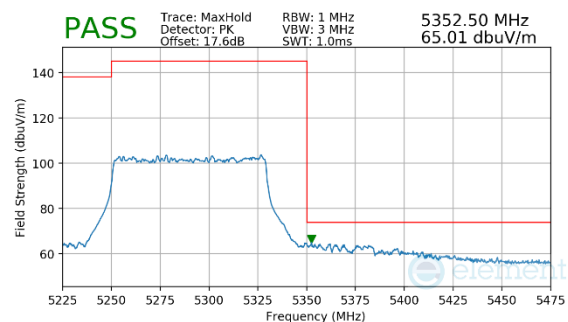


Plot 7-128. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 996 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 99 of 105

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

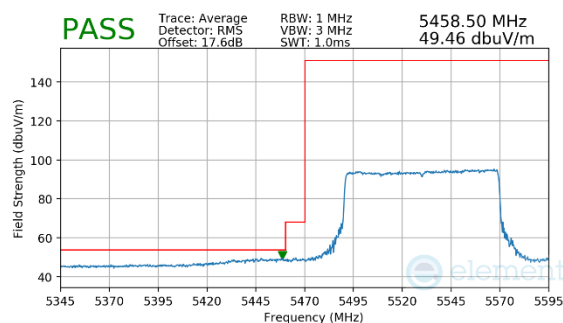


Plot 7-129. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 996 Tones)

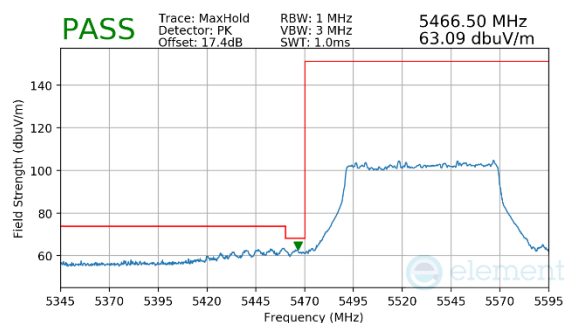

Plot 7-130. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 996 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

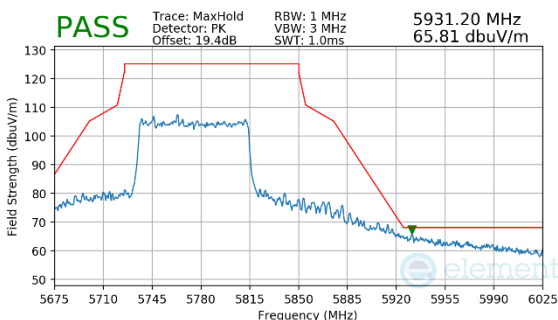


Plot 7-131. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 996 Tones)


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 100 of 105

7.6.9 MIMO Radiated Band Edge Measurements (160MHz BW – Partial Tones – 996+484T)

Worst Case Mode:	802.11
Worst Case Transfer Rate:	MCS0
RU Index:	95
Distance of Measurements:	3 Meters
Operating Frequency:	5250MHz
Channel:	50

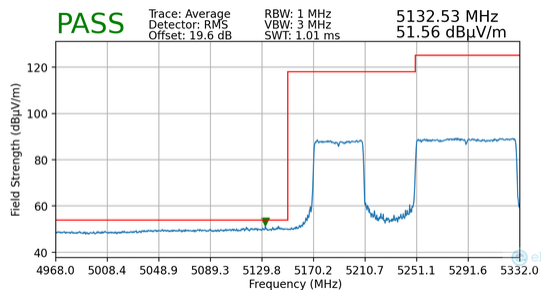


Plot 7-132. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 996+484 Tones)

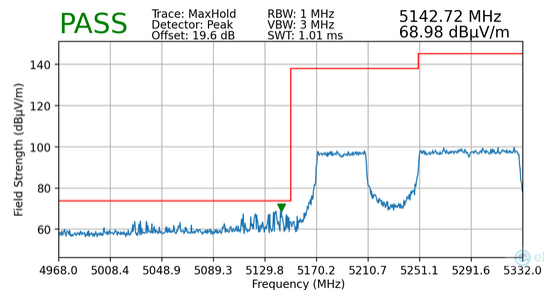


Plot 7-133. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 996+484 Tones)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	95
Distance of Measurements:	3 Meters
Operating Frequency:	5250MHz
Channel:	50

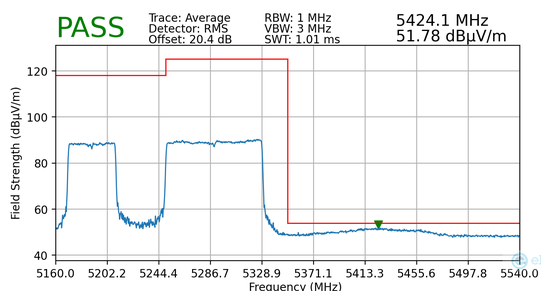


Plot 7-134. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 996+484 Tones)

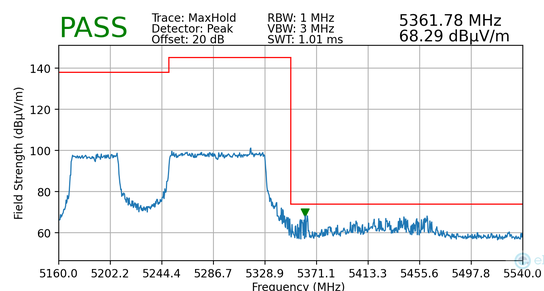


Plot 7-135. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 996+484 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 101 of 105

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index:	1094
Distance of Measurements:	3 Meters
Operating Frequency:	5570MHz
Channel:	114

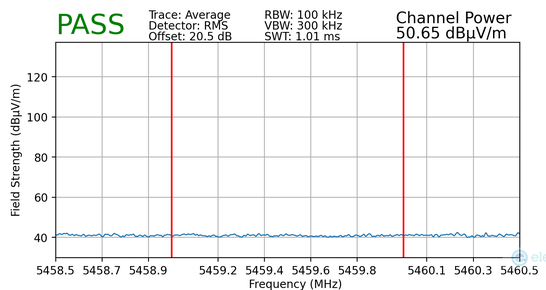

**Plot 7-136. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 2C – 996+484 Tones)**

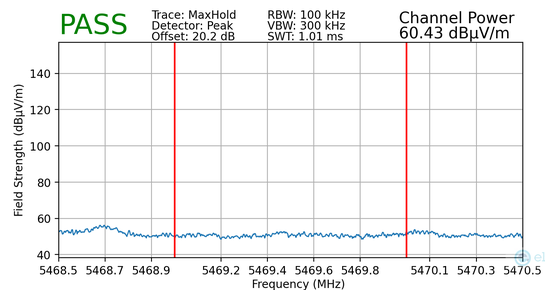


**Plot 7-137. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 2C – 996+484 Tones)**


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 102 of 105

7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	68
Distance of Measurements:	3 Meters
Operating Frequency:	5250MHz
Channel:	50

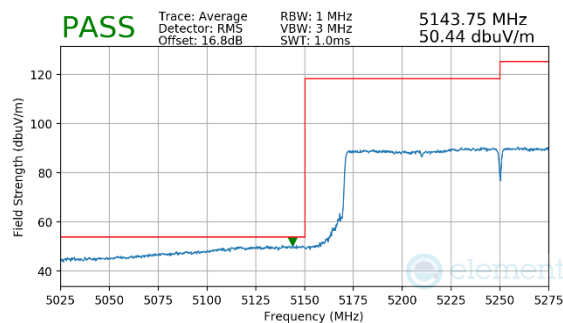


Plot 7-138. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 2x996 Tones)

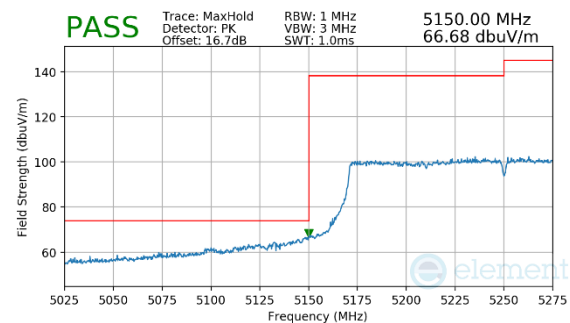


Plot 7-139. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 2x996 Tones)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	68
Distance of Measurements:	3 Meters
Operating Frequency:	5250MHz
Channel:	50

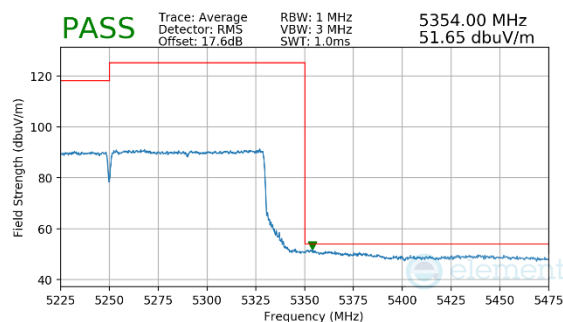

Plot 7-140. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 2x996 Tones)

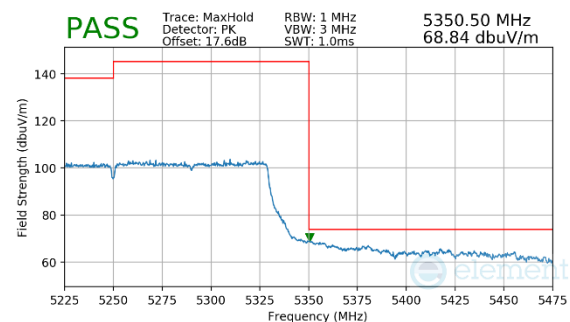


Plot 7-141. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 2x996 Tones)


FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 103 of 105



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	68
Distance of Measurements:	3 Meters
Operating Frequency:	5570MHz
Channel:	114

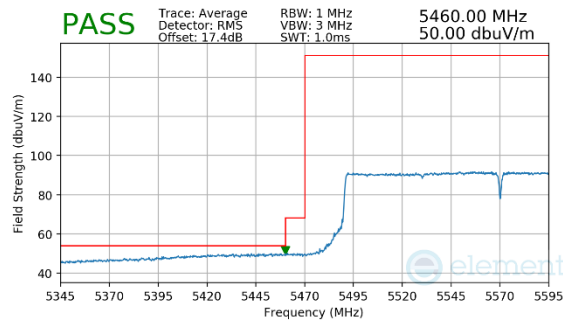

Plot 7-142. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 2C – 2x996 Tones)

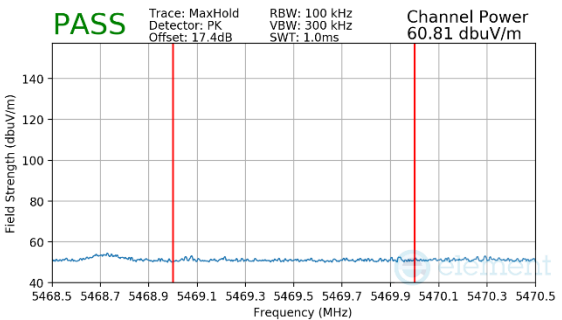

Plot 7-143. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 2C – 2x996 Tones)

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 104 of 105



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS938B** is in compliance with FCC Part Subpart E (15.407) of the FCC rules.

FCC ID: A3LSMS938B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260069-18.A3L	Test Dates: 09/03/2024 - 11/07/2024	EUT Type: Portable Handset	Page 105 of 105