



SAR EVALUATION REPORT

Applicant Name:
 Samsung Electronics, Co. Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do 443-742, Korea

Date of Testing:
 03/09/15 - 04/27/15
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 0Y1503040516-R2.A3L

FCC ID: A3LSMS978L

APPLICANT: SAMSUNG ELECTRONICS, CO. LTD.


DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model(s): SM-S978L

| Equipment Class | Band & Mode | Tx Frequency | SAR | |
|---|------------------|-----------------------|------------------|-----------------------|
| | | | 1 gm Head (W/kg) | 1 gm Body-Worn (W/kg) |
| PCE | Cell. CDMA/EVDO | 824.70 - 848.31 MHz | 0.71 | 0.65 |
| PCE | PCS CDMA/EVDO | 1851.25 - 1908.75 MHz | 0.45 | 0.47 |
| PCE | LTE Band 13 | 779.5 - 784.5 MHz | 0.41 | 0.66 |
| PCE | LTE Band 4 (AWS) | 1710.7 - 1754.3 MHz | 0.30 | 0.40 |
| DTS | 2.4 GHz WLAN | 2412 - 2462 MHz | 0.53 | < 0.1 |
| DSS/DTS | Bluetooth | 2402 - 2480 MHz | N/A | |
| Simultaneous SAR per KDB 690783 D01v01r03: | | | 1.24 | 0.79 |

Note: This revised Test Report (S/N: 0Y1503040516-R2.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.



Randy Ortanez
 President





The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 1 of 41 | |

T A B L E O F C O N T E N T S

| | | |
|--|---|----|
| 1 | DEVICE UNDER TEST | 3 |
| 2 | LTE INFORMATION | 6 |
| 3 | INTRODUCTION | 7 |
| 4 | DOSIMETRIC ASSESSMENT | 8 |
| 5 | DEFINITION OF REFERENCE POINTS | 9 |
| 6 | TEST CONFIGURATION POSITIONS FOR HANDSETS | 10 |
| 7 | RF EXPOSURE LIMITS | 13 |
| 8 | FCC MEASUREMENT PROCEDURES | 14 |
| 9 | RF CONDUCTED POWERS | 18 |
| 10 | SYSTEM VERIFICATION | 27 |
| 11 | SAR DATA SUMMARY | 29 |
| 12 | FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS | 34 |
| 13 | SAR MEASUREMENT VARIABILITY | 36 |
| 14 | EQUIPMENT LIST | 37 |
| 15 | MEASUREMENT UNCERTAINTIES | 38 |
| 16 | CONCLUSION | 39 |
| 17 | REFERENCES | 40 |
| APPENDIX A: SAR TEST PLOTS | | |
| APPENDIX B: SAR DIPOLE VERIFICATION PLOTS | | |
| APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES | | |
| APPENDIX D: SAR TISSUE SPECIFICATIONS | | |
| APPENDIX E: SAR SYSTEM VALIDATION | | |
| APPENDIX F: DUT ANTENNA DIAGRAM AND SAR TEST SETUP PHOTOGRAPHS | | |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST <small>ENGINEERING LABORATORY, INC.</small> | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 2 of 41 |

1 DEVICE UNDER TEST

1.1 Device Overview

| Band & Mode | Operating Modes | Tx Frequency |
|------------------|-----------------|-----------------------|
| Cell. CDMA/EVDO | Voice/Data | 824.70 - 848.31 MHz |
| PCS CDMA/EVDO | Voice/Data | 1851.25 - 1908.75 MHz |
| LTE Band 13 | Data | 779.5 - 784.5 MHz |
| LTE Band 4 (AWS) | Data | 1710.7 - 1754.3 MHz |
| 2.4 GHz WLAN | Data | 2412 - 2462 MHz |
| Bluetooth | Data | 2402 - 2480 MHz |
| NFC | Data | 13.56 MHz |



1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

| Mode / Band | | Modulated Average (dBm) |
|-----------------|---------|-------------------------|
| Cell. CDMA/EVDO | Maximum | 25.0 |
| | Nominal | 24.5 |
| PCS CDMA/EVDO | Maximum | 25.0 |
| | Nominal | 24.5 |

| Mode / Band | | Modulated Average (dBm) |
|------------------|---------|-------------------------|
| LTE Band 13 | Maximum | 24.0 |
| | Nominal | 23.5 |
| LTE Band 4 (AWS) | Maximum | 24.0 |
| | Nominal | 23.5 |

| Mode / Band | | Modulated Average (dBm) |
|------------------------|---------|-------------------------|
| IEEE 802.11b (2.4 GHz) | Maximum | 14.5 |
| | Nominal | 14.0 |
| IEEE 802.11g (2.4 GHz) | Maximum | 12.0 |
| | Nominal | 11.5 |
| IEEE 802.11n (2.4 GHz) | Maximum | 9.5 |
| | Nominal | 9.0 |
| Bluetooth | Maximum | 9.5 |
| | Nominal | 9.0 |
| Bluetooth LE | Maximum | 0.5 |
| | Nominal | 0.0 |

| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 3 of 41 |

1.3 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. The overall diagonal dimension of the device is < 160 mm and the diagonal display is < 150 mm. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

1.4 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device which has irremovable battery and back cover. The NFC antenna location diagram can be found in Appendix F.

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

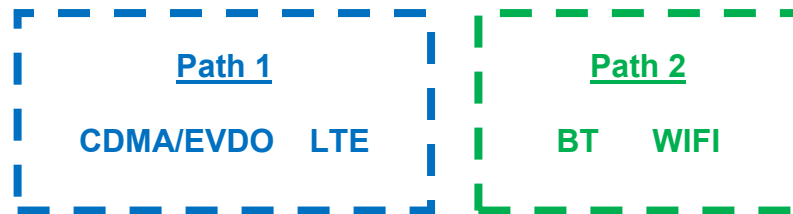




Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-1
Simultaneous Transmission Scenarios

| No. | Capable Transmit Configuration | Head | Body-Worn Accessory | Notes |
|-----|-------------------------------------|------|---------------------|---|
| 1 | 1x CDMA voice + 2.4 GHz WI-FI | Yes | Yes | |
| 2 | 1x CDMA voice + 2.4 GHz Bluetooth | N/A | Yes | |
| 3 | LTE + 2.4 GHz Bluetooth | N/A | Yes* | *-Pre-installed VOIP applications are considered. |
| 4 | CDMA/EVDO data + 2.4 GHz Bluetooth | N/A | Yes* | *-Pre-installed VOIP applications are considered. |
| 5 | CDMA/EVDO data + 2.4 GHz WI-FI | N/A | N/A | Not supported by SW |
| 6 | LTE + 2.4 GHz WI-FI | N/A | N/A | Not supported by SW |
| 7 | 1x CDMA voice + CDMA/EVDO data | N/A | N/A | Not supported by HW |
| 8 | CDMA/EVDO data + LTE | N/A | N/A | Not supported by HW |
| 9 | 1x CDMA voice + LTE | N/A | N/A | Not supported by HW |
| 10 | 1x CDMA voice + LTE + 2.4 GHz WI-FI | N/A | N/A | Not supported by HW |

1. All licensed modes share the same antenna path and cannot transmit simultaneously.
2. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
3. WIFI Hotspot is not supported by this device. 3rd party applications that may enable WIFI hotspot have also been disabled. The operational description contains more information.

| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 4 of 41 |

1.6 SAR Test Exclusions Applied

(A) WIFI/BT

Per FCC KDB 447498 D01v05, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(9/15) * \sqrt{2.480}] = 0.9 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

(B) Licensed Transmitter(s)

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05.

1.7 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.



1.8 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01, D05 (3G/4G)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.



| | Head Serial Number | Body-Worn Serial Number |
|------------------|--------------------|-------------------------|
| Cell. CDMA/EVDO | 990004756080085 | 990004756080085 |
| PCS CDMA/EVDO | 990004756086298 | 990004756086298 |
| LTE Band 13 | 990004756080085 | 990004756080085 |
| LTE Band 4 (AWS) | 990004756080085 | 990004756080085 |
| 2.4 GHz WLAN | 990004756081075 | 990004756081075 |

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 5 of 41 |

2

LTE INFORMATION

| LTE Information | | | |
|---|--|----------------|----------------|
| FCC ID | A3LSMS978L | | |
| Form Factor | Portable Handset | | |
| Frequency Range of each LTE transmission band | LTE Band 13 (779.5 - 784.5 MHz) | | |
| | LTE Band 4 (AWS) (1710.7 - 1754.3 MHz) | | |
| Channel Bandwidths | LTE Band 13: 5 MHz, 10 MHz | | |
| | LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz | | |
| Channel Numbers and Frequencies (MHz) | Low | Mid | High |
| LTE Band 13: 5 MHz | 779.5 (23205) | 782 (23230) | 784.5 (23255) |
| LTE Band 13: 10 MHz | N/A | 782 (23230) | N/A |
| LTE Band 4 (AWS): 1.4 MHz | 1710.7 (19957) | 1732.5 (20175) | 1754.3 (20393) |
| LTE Band 4 (AWS): 3 MHz | 1711.5 (19965) | 1732.5 (20175) | 1753.5 (20385) |
| LTE Band 4 (AWS): 5 MHz | 1712.5 (19975) | 1732.5 (20175) | 1752.5 (20375) |
| LTE Band 4 (AWS): 10 MHz | 1715 (20000) | 1732.5 (20175) | 1750 (20350) |
| LTE Band 4 (AWS): 15 MHz | 1717.5 (20025) | 1732.5 (20175) | 1747.5 (20325) |
| LTE Band 4 (AWS): 20 MHz | 1720 (20050) | 1732.5 (20175) | 1745 (20300) |
| UE Category | 4 | | |
| Modulations Supported in UL | QPSK, 16QAM | | |
| LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided) | YES | | |
| A-MPR (Additional MPR) disabled for SAR Testing? | YES | | |
| LTE Release 10 Additional Information | This device does not support full LTE Release 10 Features such as: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eICI, WIFI Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA. | | |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 6 of 41 | |

3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 7 of 41 | |

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASy manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01*

| Frequency | Maximum Area Scan Resolution (mm) (Δx_{area} , Δy_{area}) | Maximum Zoom Scan Resolution (mm) (Δx_{zoom} , Δy_{zoom}) | Maximum Zoom Scan Spatial Resolution (mm) | | | Minimum Zoom Scan Volume (mm) (x,y,z) |
|-----------|--|--|---|----------------------|-------------------------------|--|
| | | | Uniform Grid | Graded Grid | | |
| | | | | $\Delta z_{zoom}(n)$ | $\Delta z_{zoom}(1)^*$ | |
| ≤ 2 GHz | ≤ 15 | ≤ 8 | ≤ 5 | ≤ 4 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 30 |
| 2-3 GHz | ≤ 12 | ≤ 5 | ≤ 5 | ≤ 4 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 30 |
| 3-4 GHz | ≤ 12 | ≤ 5 | ≤ 4 | ≤ 3 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 28 |
| 4-5 GHz | ≤ 10 | ≤ 4 | ≤ 3 | ≤ 2.5 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 25 |
| 5-6 GHz | ≤ 10 | ≤ 4 | ≤ 2 | ≤ 2 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 22 |

*Also compliant to IEEE 1528-2013 Table 6

| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 8 of 41 |

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

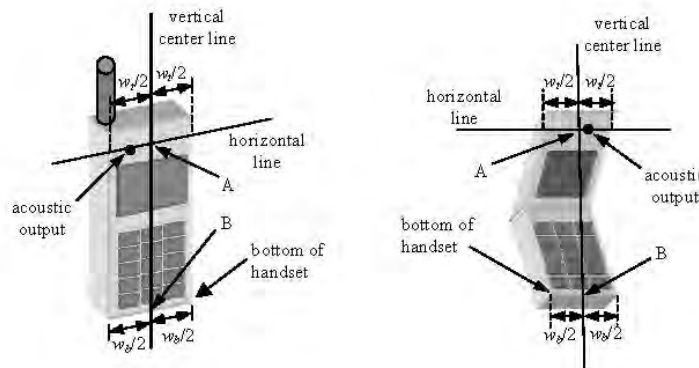




Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

| | | | | |
|--------------------------------------|--|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  SAMSUNG | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 9 of 41 |

6 TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

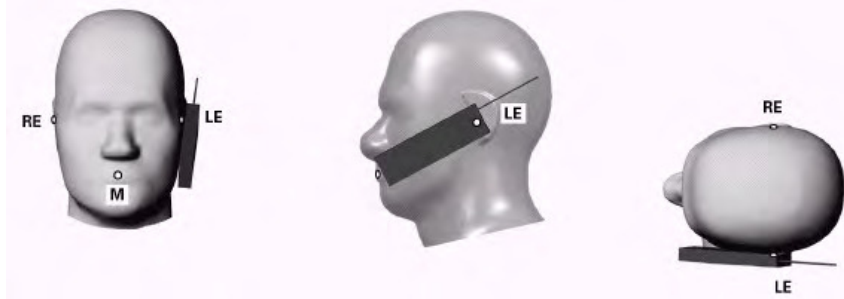




Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 10 of 41 |

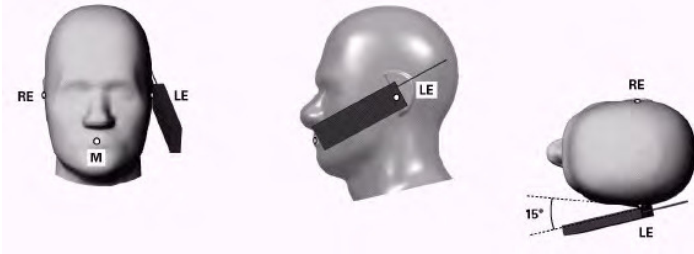


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

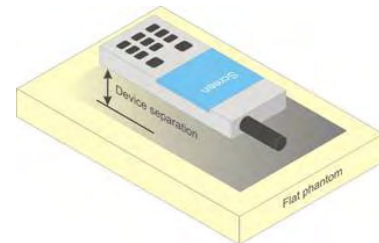




Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.



Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 11 of 41 |

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v05, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

| | | | |
|--------------------------------------|--|-------------------------------|--|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 12 of 41 |

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

| HUMAN EXPOSURE LIMITS | | |
|---|---|---|
| | UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g) | CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g) |
| Peak Spatial Average SAR Head | 1.6 | 8.0 |
| Whole Body SAR | 0.08 | 0.4 |
| Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc. | 4.0 | 20 |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 13 of 41 | |

8

FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.



8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 14 of 41 |

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

| Parameter | Units | Value |
|------------------------------|--------------|-------|
| I_{or} | dBm/1.23 MHz | -104 |
| $\frac{Pilot E_c}{I_{or}}$ | dB | -7 |
| $\frac{Traffic E_c}{I_{or}}$ | dB | -7.4 |

Table 8-2
Parameters for Max. Power for RC3

| Parameter | Units | Value |
|------------------------------|--------------|-------|
| I_{or} | dBm/1.23 MHz | -86 |
| $\frac{Pilot E_c}{I_{or}}$ | dB | -7 |
| $\frac{Traffic E_c}{I_{or}}$ | dB | -7.4 |

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.



8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at fullrate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section **Error! Reference source not found.** for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements

SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 15 of 41 |

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with Ev-Do capabilities, the 3G SAR test reduction procedure is applied to Ev-Do Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.5 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations



A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 16 of 41 |

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.



8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

8.6.2 Frequency Channel Configurations [24]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 17 of 41 | |

9 RF CONDUCTED POWERS



9.1 CDMA Conducted Powers

| Band | Channel | Rule Part | Frequency | SO55 [dBm] | SO55 [dBm] | TDSO SO32 [dBm] | TDSO SO32 [dBm] | 1x EvDO Rev. 0 [dBm] | 1x EvDO Rev. A [dBm] |
|----------|---------|-----------|-----------|------------|------------|-----------------|-----------------|----------------------|----------------------|
| | F-RC | | MHz | RC1 | RC3 | FCH+SCH | FCH | (RTAP) | (RETAP) |
| Cellular | 1013 | 22H | 824.7 | 24.63 | 24.65 | 24.64 | 24.76 | 24.79 | 24.74 |
| | 384 | 22H | 836.52 | 24.68 | 24.65 | 24.71 | 24.95 | 24.96 | 24.94 |
| | 777 | 22H | 848.31 | 24.55 | 24.58 | 24.63 | 24.63 | 24.71 | 24.68 |
| PCS | 25 | 24E | 1851.25 | 24.67 | 24.84 | 24.75 | 24.82 | 24.74 | 24.73 |
| | 600 | 24E | 1880 | 24.64 | 24.75 | 24.72 | 24.70 | 24.75 | 24.71 |
| | 1175 | 24E | 1908.75 | 24.32 | 24.45 | 24.55 | 24.50 | 24.53 | 24.50 |

Note: RC1 is only applicable for IS-95 compatibility.



Figure 9-1
Power Measurement Setup

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 18 of 41 | |

9.2 LTE Conducted Powers

9.2.1

LTE Band 13



Table 9-1
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|-------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Mid | 782.0 | 23230 | 10 | QPSK | 1 | 0 | 23.93 | 0 | 0 |
| | 782.0 | 23230 | 10 | QPSK | 1 | 25 | 23.91 | 0 | 0 |
| | 782.0 | 23230 | 10 | QPSK | 1 | 49 | 23.68 | 0 | 0 |
| | 782.0 | 23230 | 10 | QPSK | 25 | 0 | 22.65 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | QPSK | 25 | 12 | 22.69 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | QPSK | 25 | 25 | 22.72 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | QPSK | 50 | 0 | 22.67 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | 16QAM | 1 | 0 | 22.75 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | 16QAM | 1 | 25 | 22.67 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | 16QAM | 1 | 49 | 22.79 | 0-1 | 1 |
| | 782.0 | 23230 | 10 | 16QAM | 25 | 0 | 21.81 | 0-2 | 2 |
| | 782.0 | 23230 | 10 | 16QAM | 25 | 12 | 21.70 | 0-2 | 2 |
| | 782.0 | 23230 | 10 | 16QAM | 25 | 25 | 21.72 | 0-2 | 2 |
| 782.0 | 23230 | 10 | 16QAM | 50 | 0 | 21.70 | 0-2 | 2 | |

Table 9-2
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|-------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Mid | 782.0 | 23230 | 5 | QPSK | 1 | 0 | 23.92 | 0 | 0 |
| | 782.0 | 23230 | 5 | QPSK | 1 | 12 | 23.91 | 0 | 0 |
| | 782.0 | 23230 | 5 | QPSK | 1 | 24 | 23.72 | 0 | 0 |
| | 782.0 | 23230 | 5 | QPSK | 12 | 0 | 22.64 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | QPSK | 12 | 6 | 22.82 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | QPSK | 12 | 13 | 22.77 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | QPSK | 25 | 0 | 22.74 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | 16-QAM | 1 | 0 | 22.87 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | 16-QAM | 1 | 12 | 22.80 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | 16-QAM | 1 | 24 | 22.67 | 0-1 | 1 |
| | 782.0 | 23230 | 5 | 16-QAM | 12 | 0 | 21.72 | 0-2 | 2 |
| | 782.0 | 23230 | 5 | 16-QAM | 12 | 6 | 21.67 | 0-2 | 2 |
| | 782.0 | 23230 | 5 | 16-QAM | 12 | 13 | 21.64 | 0-2 | 2 |
| 782.0 | 23230 | 5 | 16-QAM | 25 | 0 | 21.80 | 0-2 | 2 | |

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 19 of 41 |



9.2.2

LTE Band 4 (AWS)

Table 9-3
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth



| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|-----|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Mid | 1732.5 | 20175 | 20 | QPSK | 1 | 0 | 23.94 | 0 | 0 |
| | 1732.5 | 20175 | 20 | QPSK | 1 | 50 | 23.90 | 0 | 0 |
| | 1732.5 | 20175 | 20 | QPSK | 1 | 99 | 23.45 | 0 | 0 |
| | 1732.5 | 20175 | 20 | QPSK | 50 | 0 | 22.60 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | QPSK | 50 | 25 | 22.38 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | QPSK | 50 | 50 | 22.27 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | QPSK | 100 | 0 | 22.47 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | 16QAM | 1 | 0 | 22.61 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | 16QAM | 1 | 50 | 22.40 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | 16QAM | 1 | 99 | 22.32 | 0-1 | 1 |
| | 1732.5 | 20175 | 20 | 16QAM | 50 | 0 | 21.38 | 0-2 | 2 |
| | 1732.5 | 20175 | 20 | 16QAM | 50 | 25 | 21.27 | 0-2 | 2 |
| | 1732.5 | 20175 | 20 | 16QAM | 50 | 50 | 21.22 | 0-2 | 2 |
| | 1732.5 | 20175 | 20 | 16QAM | 100 | 0 | 21.33 | 0-2 | 2 |

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 20 of 41 |

**Table 9-4
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth**

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|--------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low | 1717.5 | 20025 | 15 | QPSK | 1 | 0 | 23.91 | 0 | 0 |
| | 1717.5 | 20025 | 15 | QPSK | 1 | 36 | 23.90 | 0 | 0 |
| | 1717.5 | 20025 | 15 | QPSK | 1 | 74 | 23.62 | 0 | 0 |
| | 1717.5 | 20025 | 15 | QPSK | 36 | 0 | 22.70 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | QPSK | 36 | 18 | 22.60 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | QPSK | 36 | 37 | 22.55 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | QPSK | 75 | 0 | 22.55 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | 16QAM | 1 | 0 | 22.47 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | 16QAM | 1 | 36 | 22.46 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | 16QAM | 1 | 74 | 22.24 | 0-1 | 1 |
| | 1717.5 | 20025 | 15 | 16QAM | 36 | 0 | 21.76 | 0-2 | 2 |
| | 1717.5 | 20025 | 15 | 16QAM | 36 | 18 | 21.70 | 0-2 | 2 |
| 1717.5 | 20025 | 15 | 16QAM | 36 | 37 | 21.54 | 0-2 | 2 | |
| 1717.5 | 20025 | 15 | 16QAM | 75 | 0 | 21.59 | 0-2 | 2 | |
| Mid | 1732.5 | 20175 | 15 | QPSK | 1 | 0 | 23.95 | 0 | 0 |
| | 1732.5 | 20175 | 15 | QPSK | 1 | 36 | 23.67 | 0 | 0 |
| | 1732.5 | 20175 | 15 | QPSK | 1 | 74 | 23.70 | 0 | 0 |
| | 1732.5 | 20175 | 15 | QPSK | 36 | 0 | 22.56 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | QPSK | 36 | 18 | 22.35 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | QPSK | 36 | 37 | 22.30 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | QPSK | 75 | 0 | 22.32 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | 16QAM | 1 | 0 | 22.76 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | 16QAM | 1 | 36 | 22.67 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | 16QAM | 1 | 74 | 22.54 | 0-1 | 1 |
| | 1732.5 | 20175 | 15 | 16QAM | 36 | 0 | 21.66 | 0-2 | 2 |
| | 1732.5 | 20175 | 15 | 16QAM | 36 | 18 | 21.50 | 0-2 | 2 |
| 1732.5 | 20175 | 15 | 16QAM | 36 | 37 | 21.44 | 0-2 | 2 | |
| 1732.5 | 20175 | 15 | 16QAM | 75 | 0 | 21.38 | 0-2 | 2 | |
| High | 1747.5 | 20325 | 15 | QPSK | 1 | 0 | 23.65 | 0 | 0 |
| | 1747.5 | 20325 | 15 | QPSK | 1 | 36 | 23.91 | 0 | 0 |
| | 1747.5 | 20325 | 15 | QPSK | 1 | 74 | 23.99 | 0 | 0 |
| | 1747.5 | 20325 | 15 | QPSK | 36 | 0 | 22.58 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | QPSK | 36 | 18 | 22.63 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | QPSK | 36 | 37 | 22.57 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | QPSK | 75 | 0 | 22.58 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | 16QAM | 1 | 0 | 22.78 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | 16QAM | 1 | 36 | 22.85 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | 16QAM | 1 | 74 | 22.96 | 0-1 | 1 |
| | 1747.5 | 20325 | 15 | 16QAM | 36 | 0 | 21.63 | 0-2 | 2 |
| | 1747.5 | 20325 | 15 | 16QAM | 36 | 18 | 21.65 | 0-2 | 2 |
| 1747.5 | 20325 | 15 | 16QAM | 36 | 37 | 21.56 | 0-2 | 2 | |
| 1747.5 | 20325 | 15 | 16QAM | 75 | 0 | 21.60 | 0-2 | 2 | |

| | | |
|--------------------------------------|--|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset |
| Page 21 of 41 | | |

**Table 9-5
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth**

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|--------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low | 1715 | 20000 | 10 | QPSK | 1 | 0 | 23.93 | 0 | 0 |
| | 1715 | 20000 | 10 | QPSK | 1 | 25 | 23.90 | 0 | 0 |
| | 1715 | 20000 | 10 | QPSK | 1 | 49 | 23.98 | 0 | 0 |
| | 1715 | 20000 | 10 | QPSK | 25 | 0 | 22.62 | 0-1 | 1 |
| | 1715 | 20000 | 10 | QPSK | 25 | 12 | 22.65 | 0-1 | 1 |
| | 1715 | 20000 | 10 | QPSK | 25 | 25 | 22.70 | 0-1 | 1 |
| | 1715 | 20000 | 10 | QPSK | 50 | 0 | 22.73 | 0-1 | 1 |
| | 1715 | 20000 | 10 | 16QAM | 1 | 0 | 22.79 | 0-1 | 1 |
| | 1715 | 20000 | 10 | 16QAM | 1 | 25 | 22.35 | 0-1 | 1 |
| | 1715 | 20000 | 10 | 16QAM | 1 | 49 | 22.88 | 0-1 | 1 |
| | 1715 | 20000 | 10 | 16QAM | 25 | 0 | 21.59 | 0-2 | 2 |
| | 1715 | 20000 | 10 | 16QAM | 25 | 12 | 21.47 | 0-2 | 2 |
| | 1715 | 20000 | 10 | 16QAM | 25 | 25 | 21.50 | 0-2 | 2 |
| Mid | 1732.5 | 20175 | 10 | QPSK | 1 | 0 | 23.91 | 0 | 0 |
| | 1732.5 | 20175 | 10 | QPSK | 1 | 25 | 23.83 | 0 | 0 |
| | 1732.5 | 20175 | 10 | QPSK | 1 | 49 | 23.45 | 0 | 0 |
| | 1732.5 | 20175 | 10 | QPSK | 25 | 0 | 22.44 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | QPSK | 25 | 12 | 22.38 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | QPSK | 25 | 25 | 22.23 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | QPSK | 50 | 0 | 22.33 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | 16QAM | 1 | 0 | 22.60 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | 16QAM | 1 | 25 | 22.70 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | 16QAM | 1 | 49 | 22.81 | 0-1 | 1 |
| | 1732.5 | 20175 | 10 | 16QAM | 25 | 0 | 21.40 | 0-2 | 2 |
| | 1732.5 | 20175 | 10 | 16QAM | 25 | 12 | 21.55 | 0-2 | 2 |
| | 1732.5 | 20175 | 10 | 16QAM | 25 | 25 | 21.46 | 0-2 | 2 |
| 1732.5 | 20175 | 10 | 16QAM | 50 | 0 | 21.37 | 0-2 | 2 | |
| High | 1750 | 20350 | 10 | QPSK | 1 | 0 | 23.86 | 0 | 0 |
| | 1750 | 20350 | 10 | QPSK | 1 | 25 | 23.96 | 0 | 0 |
| | 1750 | 20350 | 10 | QPSK | 1 | 49 | 23.78 | 0 | 0 |
| | 1750 | 20350 | 10 | QPSK | 25 | 0 | 22.68 | 0-1 | 1 |
| | 1750 | 20350 | 10 | QPSK | 25 | 12 | 22.64 | 0-1 | 1 |
| | 1750 | 20350 | 10 | QPSK | 25 | 25 | 22.61 | 0-1 | 1 |
| | 1750 | 20350 | 10 | QPSK | 50 | 0 | 22.71 | 0-1 | 1 |
| | 1750 | 20350 | 10 | 16QAM | 1 | 0 | 22.88 | 0-1 | 1 |
| | 1750 | 20350 | 10 | 16QAM | 1 | 25 | 22.76 | 0-1 | 1 |
| | 1750 | 20350 | 10 | 16QAM | 1 | 49 | 22.90 | 0-1 | 1 |
| | 1750 | 20350 | 10 | 16QAM | 25 | 0 | 21.68 | 0-2 | 2 |
| | 1750 | 20350 | 10 | 16QAM | 25 | 12 | 21.77 | 0-2 | 2 |
| | 1750 | 20350 | 10 | 16QAM | 25 | 25 | 21.68 | 0-2 | 2 |
| 1750 | 20350 | 10 | 16QAM | 50 | 0 | 21.67 | 0-2 | 2 | |



| | | |
|--------------------------------------|--|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset |
| | | Page 22 of 41 |

Table 9-6
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|--------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low | 1712.5 | 19975 | 5 | QPSK | 1 | 0 | 23.72 | 0 | 0 |
| | 1712.5 | 19975 | 5 | QPSK | 1 | 12 | 23.85 | 0 | 0 |
| | 1712.5 | 19975 | 5 | QPSK | 1 | 24 | 23.54 | 0 | 0 |
| | 1712.5 | 19975 | 5 | QPSK | 12 | 0 | 22.65 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | QPSK | 12 | 6 | 22.62 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | QPSK | 12 | 13 | 22.61 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | QPSK | 25 | 0 | 22.59 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | 16-QAM | 1 | 0 | 22.89 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | 16-QAM | 1 | 12 | 22.87 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | 16-QAM | 1 | 24 | 22.82 | 0-1 | 1 |
| | 1712.5 | 19975 | 5 | 16-QAM | 12 | 0 | 21.55 | 0-2 | 2 |
| | 1712.5 | 19975 | 5 | 16-QAM | 12 | 6 | 21.54 | 0-2 | 2 |
| 1712.5 | 19975 | 5 | 16-QAM | 12 | 13 | 21.70 | 0-2 | 2 | |
| 1712.5 | 19975 | 5 | 16-QAM | 25 | 0 | 21.55 | 0-2 | 2 | |
| Mid | 1732.5 | 20175 | 5 | QPSK | 1 | 0 | 23.57 | 0 | 0 |
| | 1732.5 | 20175 | 5 | QPSK | 1 | 12 | 23.41 | 0 | 0 |
| | 1732.5 | 20175 | 5 | QPSK | 1 | 24 | 23.71 | 0 | 0 |
| | 1732.5 | 20175 | 5 | QPSK | 12 | 0 | 22.45 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | QPSK | 12 | 6 | 22.61 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | QPSK | 12 | 13 | 22.32 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | QPSK | 25 | 0 | 22.31 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | 16-QAM | 1 | 0 | 22.34 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | 16-QAM | 1 | 12 | 22.41 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | 16-QAM | 1 | 24 | 22.62 | 0-1 | 1 |
| | 1732.5 | 20175 | 5 | 16-QAM | 12 | 0 | 21.22 | 0-2 | 2 |
| | 1732.5 | 20175 | 5 | 16-QAM | 12 | 6 | 21.26 | 0-2 | 2 |
| 1732.5 | 20175 | 5 | 16-QAM | 12 | 13 | 21.16 | 0-2 | 2 | |
| 1732.5 | 20175 | 5 | 16-QAM | 25 | 0 | 21.38 | 0-2 | 2 | |
| High | 1752.5 | 20375 | 5 | QPSK | 1 | 0 | 23.50 | 0 | 0 |
| | 1752.5 | 20375 | 5 | QPSK | 1 | 12 | 23.77 | 0 | 0 |
| | 1752.5 | 20375 | 5 | QPSK | 1 | 24 | 23.52 | 0 | 0 |
| | 1752.5 | 20375 | 5 | QPSK | 12 | 0 | 22.68 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | QPSK | 12 | 6 | 22.63 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | QPSK | 12 | 13 | 22.65 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | QPSK | 25 | 0 | 22.68 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | 16-QAM | 1 | 0 | 22.84 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | 16-QAM | 1 | 12 | 22.68 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | 16-QAM | 1 | 24 | 22.78 | 0-1 | 1 |
| | 1752.5 | 20375 | 5 | 16-QAM | 12 | 0 | 21.74 | 0-2 | 2 |
| | 1752.5 | 20375 | 5 | 16-QAM | 12 | 6 | 21.65 | 0-2 | 2 |
| 1752.5 | 20375 | 5 | 16-QAM | 12 | 13 | 21.64 | 0-2 | 2 | |
| 1752.5 | 20375 | 5 | 16-QAM | 25 | 0 | 21.73 | 0-2 | 2 | |





| | | | | |
|---|--|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST <small>ENGINEERING LABORATORY, INC.</small> | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: OY1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 23 of 41 |



Table 9-7
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|--------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low | 1711.5 | 19965 | 3 | QPSK | 1 | 0 | 23.85 | 0 | 0 |
| | 1711.5 | 19965 | 3 | QPSK | 1 | 7 | 23.84 | 0 | 0 |
| | 1711.5 | 19965 | 3 | QPSK | 1 | 14 | 23.78 | 0 | 0 |
| | 1711.5 | 19965 | 3 | QPSK | 8 | 0 | 22.71 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | QPSK | 8 | 4 | 22.64 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | QPSK | 8 | 7 | 22.54 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | QPSK | 15 | 0 | 22.60 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | 16-QAM | 1 | 0 | 22.37 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | 16-QAM | 1 | 7 | 22.14 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | 16-QAM | 1 | 14 | 22.38 | 0-1 | 1 |
| | 1711.5 | 19965 | 3 | 16-QAM | 8 | 0 | 21.70 | 0-2 | 2 |
| | 1711.5 | 19965 | 3 | 16-QAM | 8 | 4 | 21.64 | 0-2 | 2 |
| 1711.5 | 19965 | 3 | 16-QAM | 8 | 7 | 21.55 | 0-2 | 2 | |
| 1711.5 | 19965 | 3 | 16-QAM | 15 | 0 | 21.76 | 0-2 | 2 | |
| Mid | 1732.5 | 20175 | 3 | QPSK | 1 | 0 | 23.60 | 0 | 0 |
| | 1732.5 | 20175 | 3 | QPSK | 1 | 7 | 23.33 | 0 | 0 |
| | 1732.5 | 20175 | 3 | QPSK | 1 | 14 | 23.53 | 0 | 0 |
| | 1732.5 | 20175 | 3 | QPSK | 8 | 0 | 22.47 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | QPSK | 8 | 4 | 22.35 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | QPSK | 8 | 7 | 22.37 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | QPSK | 15 | 0 | 22.35 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | 16-QAM | 1 | 0 | 22.11 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | 16-QAM | 1 | 7 | 22.32 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | 16-QAM | 1 | 14 | 22.23 | 0-1 | 1 |
| | 1732.5 | 20175 | 3 | 16-QAM | 8 | 0 | 21.48 | 0-2 | 2 |
| | 1732.5 | 20175 | 3 | 16-QAM | 8 | 4 | 21.26 | 0-2 | 2 |
| 1732.5 | 20175 | 3 | 16-QAM | 8 | 7 | 21.29 | 0-2 | 2 | |
| 1732.5 | 20175 | 3 | 16-QAM | 15 | 0 | 21.40 | 0-2 | 2 | |
| High | 1753.5 | 20385 | 3 | QPSK | 1 | 0 | 23.61 | 0 | 0 |
| | 1753.5 | 20385 | 3 | QPSK | 1 | 7 | 23.74 | 0 | 0 |
| | 1753.5 | 20385 | 3 | QPSK | 1 | 14 | 23.84 | 0 | 0 |
| | 1753.5 | 20385 | 3 | QPSK | 8 | 0 | 22.62 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | QPSK | 8 | 4 | 22.65 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | QPSK | 8 | 7 | 22.71 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | QPSK | 15 | 0 | 22.72 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | 16-QAM | 1 | 0 | 22.72 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | 16-QAM | 1 | 7 | 22.83 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | 16-QAM | 1 | 14 | 22.94 | 0-1 | 1 |
| | 1753.5 | 20385 | 3 | 16-QAM | 8 | 0 | 21.59 | 0-2 | 2 |
| | 1753.5 | 20385 | 3 | 16-QAM | 8 | 4 | 21.77 | 0-2 | 2 |
| 1753.5 | 20385 | 3 | 16-QAM | 8 | 7 | 21.73 | 0-2 | 2 | |
| 1753.5 | 20385 | 3 | 16-QAM | 15 | 0 | 21.78 | 0-2 | 2 | |

| | | |
|--------------------------------------|--|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset |
| Page 24 of 41 | | |

**Table 9-8
LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth**

| | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|--------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low | 1710.7 | 19957 | 1.4 | QPSK | 1 | 0 | 23.87 | 0 | 0 |
| | 1710.7 | 19957 | 1.4 | QPSK | 1 | 2 | 23.92 | 0 | 0 |
| | 1710.7 | 19957 | 1.4 | QPSK | 1 | 5 | 23.84 | 0 | 0 |
| | 1710.7 | 19957 | 1.4 | QPSK | 3 | 0 | 23.64 | 0 | 0 |
| | 1710.7 | 19957 | 1.4 | QPSK | 3 | 2 | 23.69 | 0 | 0 |
| | 1710.7 | 19957 | 1.4 | QPSK | 3 | 3 | 23.63 | 0 | 0 |
| | 1710.7 | 19957 | 1.4 | QPSK | 6 | 0 | 22.78 | 0-1 | 1 |
| | 1710.7 | 19957 | 1.4 | 16-QAM | 1 | 0 | 22.44 | 0-1 | 1 |
| | 1710.7 | 19957 | 1.4 | 16-QAM | 1 | 2 | 22.55 | 0-1 | 1 |
| | 1710.7 | 19957 | 1.4 | 16-QAM | 1 | 5 | 22.42 | 0-1 | 1 |
| | 1710.7 | 19957 | 1.4 | 16-QAM | 3 | 0 | 22.33 | 0-1 | 1 |
| | 1710.7 | 19957 | 1.4 | 16-QAM | 3 | 2 | 22.77 | 0-1 | 1 |
| | 1710.7 | 19957 | 1.4 | 16-QAM | 3 | 3 | 22.46 | 0-1 | 1 |
| 1710.7 | 19957 | 1.4 | 16-QAM | 6 | 0 | 21.68 | 0-2 | 2 | |
| Mid | 1732.5 | 20175 | 1.4 | QPSK | 1 | 0 | 23.55 | 0 | 0 |
| | 1732.5 | 20175 | 1.4 | QPSK | 1 | 2 | 23.77 | 0 | 0 |
| | 1732.5 | 20175 | 1.4 | QPSK | 1 | 5 | 23.60 | 0 | 0 |
| | 1732.5 | 20175 | 1.4 | QPSK | 3 | 0 | 23.46 | 0 | 0 |
| | 1732.5 | 20175 | 1.4 | QPSK | 3 | 2 | 23.44 | 0 | 0 |
| | 1732.5 | 20175 | 1.4 | QPSK | 3 | 3 | 23.30 | 0 | 0 |
| | 1732.5 | 20175 | 1.4 | QPSK | 6 | 0 | 22.40 | 0-1 | 1 |
| | 1732.5 | 20175 | 1.4 | 16-QAM | 1 | 0 | 22.43 | 0-1 | 1 |
| | 1732.5 | 20175 | 1.4 | 16-QAM | 1 | 2 | 22.45 | 0-1 | 1 |
| | 1732.5 | 20175 | 1.4 | 16-QAM | 1 | 5 | 22.35 | 0-1 | 1 |
| | 1732.5 | 20175 | 1.4 | 16-QAM | 3 | 0 | 22.58 | 0-1 | 1 |
| | 1732.5 | 20175 | 1.4 | 16-QAM | 3 | 2 | 22.43 | 0-1 | 1 |
| | 1732.5 | 20175 | 1.4 | 16-QAM | 3 | 3 | 22.40 | 0-1 | 1 |
| 1732.5 | 20175 | 1.4 | 16-QAM | 6 | 0 | 21.34 | 0-2 | 2 | |
| High | 1754.3 | 20393 | 1.4 | QPSK | 1 | 0 | 23.79 | 0 | 0 |
| | 1754.3 | 20393 | 1.4 | QPSK | 1 | 2 | 23.83 | 0 | 0 |
| | 1754.3 | 20393 | 1.4 | QPSK | 1 | 5 | 23.68 | 0 | 0 |
| | 1754.3 | 20393 | 1.4 | QPSK | 3 | 0 | 23.68 | 0 | 0 |
| | 1754.3 | 20393 | 1.4 | QPSK | 3 | 2 | 23.69 | 0 | 0 |
| | 1754.3 | 20393 | 1.4 | QPSK | 3 | 3 | 23.79 | 0 | 0 |
| | 1754.3 | 20393 | 1.4 | QPSK | 6 | 0 | 22.70 | 0-1 | 1 |
| | 1754.3 | 20393 | 1.4 | 16-QAM | 1 | 0 | 22.90 | 0-1 | 1 |
| | 1754.3 | 20393 | 1.4 | 16-QAM | 1 | 2 | 22.84 | 0-1 | 1 |
| | 1754.3 | 20393 | 1.4 | 16-QAM | 1 | 5 | 22.95 | 0-1 | 1 |
| | 1754.3 | 20393 | 1.4 | 16-QAM | 3 | 0 | 22.70 | 0-1 | 1 |
| | 1754.3 | 20393 | 1.4 | 16-QAM | 3 | 2 | 22.83 | 0-1 | 1 |
| | 1754.3 | 20393 | 1.4 | 16-QAM | 3 | 3 | 22.74 | 0-1 | 1 |
| 1754.3 | 20393 | 1.4 | 16-QAM | 6 | 0 | 21.62 | 0-2 | 2 | |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 25 of 41 |

9.3 WLAN Conducted Powers

**Table 9-9
IEEE 802.11b Average RF Power**

| Mode | Freq | Channel | 802.11b (2.4 GHz) Conducted Power [dBm] | | | |
|---------|-------|---------|---|-------|-------|-------|
| | | | Data Rate [Mbps] | | | |
| | [MHz] | 1 | 2 | 5.5 | 11 | |
| 802.11b | 2412 | 1* | 14.09 | 13.81 | 13.83 | 13.89 |
| 802.11b | 2437 | 6* | 14.49 | 14.18 | 14.22 | 14.20 |
| 802.11b | 2462 | 11* | 14.07 | 13.76 | 13.75 | 13.86 |

**Table 9-10
IEEE 802.11g Average RF Power**

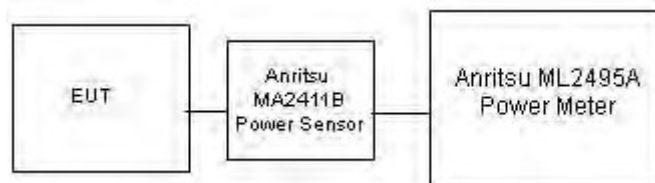
| Mode | Freq | Channel | 802.11g (2.4 GHz) Conducted Power [dBm] | | | | | | | |
|---------|-------|---------|---|-------|-------|-------|-------|-------|-------|-------|
| | | | Data Rate [Mbps] | | | | | | | |
| | [MHz] | 6 | 9 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 802.11g | 2412 | 1 | 11.39 | 11.17 | 11.23 | 11.21 | 11.31 | 11.29 | 11.35 | 11.36 |
| 802.11g | 2437 | 6 | 11.58 | 11.36 | 11.40 | 11.40 | 11.52 | 11.45 | 11.52 | 11.51 |
| 802.11g | 2462 | 11 | 10.97 | 11.07 | 11.07 | 11.14 | 11.15 | 11.16 | 11.22 | 11.24 |

**Table 9-11
IEEE 802.11n Average RF Power**



| Mode | Freq | Channel | 802.11n (2.4 GHz) Conducted Power [dBm] | | | | | | | |
|---------|-------|---------|---|------|------|------|------|------|------|------|
| | | | Data Rate [Mbps] | | | | | | | |
| | [MHz] | 6.5 | 13 | 20 | 26 | 39 | 52 | 58 | 65 | |
| 802.11n | 2412 | 1 | 9.39 | 8.93 | 8.91 | 8.92 | 8.87 | 8.87 | 8.89 | 8.97 |
| 802.11n | 2437 | 6 | 9.44 | 9.03 | 8.96 | 8.91 | 8.92 | 8.87 | 8.89 | 9.01 |
| 802.11n | 2462 | 11 | 8.95 | 8.92 | 8.87 | 8.89 | 8.80 | 8.86 | 8.84 | 8.96 |

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz operations, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-2
Power Measurement Setup for Bandwidths < 50 MHz**

| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 26 of 41 |



10 SYSTEM VERIFICATION

10.1 Tissue Verification

**Table 10-1
Measured Tissue Properties**

| Calibrated for Tests Performed on: | Tissue Type | Tissue Temp During Calibration (C°) | Measured Frequency (MHz) | Measured Conductivity, σ (S/m) | Measured Dielectric Constant, ϵ | TARGET Conductivity, σ (S/m) | TARGET Dielectric Constant, ϵ | % dev σ | % dev ϵ |
|------------------------------------|-------------|-------------------------------------|--------------------------|---------------------------------------|--|-------------------------------------|--|----------------|------------------|
| 03/10/2015 | 750H | 21.8 | 725 | 0.880 | 41.834 | 0.891 | 42.071 | -1.23% | -0.56% |
| | | | 740 | 0.889 | 41.664 | 0.893 | 41.994 | -0.45% | -0.79% |
| | | | 755 | 0.907 | 41.455 | 0.894 | 41.916 | 1.45% | -1.10% |
| | | | 770 | 0.919 | 41.127 | 0.895 | 41.838 | 2.68% | -1.70% |
| | | | 785 | 0.931 | 41.008 | 0.896 | 41.760 | 3.91% | -1.80% |
| 03/12/2015 | 835H | 22.3 | 820 | 0.901 | 40.408 | 0.899 | 41.578 | 0.22% | -2.81% |
| | | | 835 | 0.917 | 40.194 | 0.900 | 41.500 | 1.89% | -3.15% |
| | | | 850 | 0.929 | 39.993 | 0.916 | 41.500 | 1.42% | -3.63% |
| 03/09/2015 | 1750H | 22.4 | 1710 | 1.286 | 38.755 | 1.348 | 40.142 | -4.60% | -3.46% |
| | | | 1750 | 1.325 | 38.599 | 1.371 | 40.079 | -3.36% | -3.69% |
| | | | 1790 | 1.365 | 38.418 | 1.394 | 40.016 | -2.08% | -3.99% |
| 03/16/2015 | 1900H | 23.4 | 1850 | 1.376 | 38.311 | 1.400 | 40.000 | -1.71% | -4.22% |
| | | | 1880 | 1.406 | 38.182 | 1.400 | 40.000 | 0.43% | -4.54% |
| | | | 1910 | 1.435 | 38.074 | 1.400 | 40.000 | 2.50% | -4.82% |
| 03/09/2015 | 2450H | 22.7 | 2401 | 1.775 | 39.264 | 1.756 | 39.287 | 1.08% | -0.06% |
| | | | 2450 | 1.834 | 39.060 | 1.800 | 39.200 | 1.89% | -0.36% |
| | | | 2499 | 1.890 | 38.874 | 1.853 | 39.138 | 2.00% | -0.67% |
| 04/27/2015 | 750B | 21.3 | 725 | 0.952 | 55.280 | 0.961 | 55.629 | -0.94% | -0.63% |
| | | | 740 | 0.968 | 55.136 | 0.963 | 55.570 | 0.52% | -0.78% |
| | | | 755 | 0.983 | 54.950 | 0.964 | 55.512 | 1.97% | -1.01% |
| | | | 770 | 0.994 | 54.804 | 0.965 | 55.453 | 3.01% | -1.17% |
| | | | 785 | 1.009 | 54.614 | 0.966 | 55.395 | 4.45% | -1.41% |
| 04/27/2015 | 835B | 21.7 | 820 | 0.972 | 54.430 | 0.969 | 55.258 | 0.31% | -1.50% |
| | | | 835 | 0.984 | 54.320 | 0.970 | 55.200 | 1.44% | -1.59% |
| | | | 850 | 0.999 | 54.176 | 0.988 | 55.154 | 1.11% | -1.77% |
| 04/27/2015 | 1750B | 21.4 | 1710 | 1.408 | 53.031 | 1.463 | 53.537 | -3.76% | -0.95% |
| | | | 1750 | 1.451 | 52.881 | 1.488 | 53.432 | -2.49% | -1.03% |
| | | | 1790 | 1.497 | 52.760 | 1.514 | 53.326 | -1.12% | -1.06% |
| 04/25/2015 | 1900B | 23.5 | 1850 | 1.495 | 51.523 | 1.520 | 53.300 | -1.64% | -3.33% |
| | | | 1880 | 1.529 | 51.377 | 1.520 | 53.300 | 0.59% | -3.61% |
| | | | 1910 | 1.575 | 51.359 | 1.520 | 53.300 | 3.62% | -3.64% |
| 04/27/2015 | 2450B | 23.2 | 2401 | 1.942 | 50.466 | 1.903 | 52.765 | 2.05% | -4.36% |
| | | | 2450 | 2.011 | 50.356 | 1.950 | 52.700 | 3.13% | -4.45% |
| | | | 2499 | 2.072 | 50.149 | 2.019 | 52.638 | 2.63% | -4.73% |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 27 of 41 |

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-2
System Verification Results

| System Verification TARGET & MEASURED | | | | | | | | | | | | |
|--|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|-----------------------------------|-------------------------------------|---|-----------------------------|
| SAR System # | Tissue Frequency (MHz) | Tissue Type | Date: | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Dipole SN | Probe SN | Measured SAR _{1g} (W/kg) | 1 W Target SAR _{1g} (W/kg) | 1 W Normalized SAR _{1g} (W/kg) | Deviation _{1g} (%) |
| J | 750 | HEAD | 03/10/2015 | 23.1 | 21.8 | 0.100 | 1003 | 3022 | 0.800 | 8.090 | 8.000 | -1.11% |
| D | 835 | HEAD | 03/12/2015 | 23.0 | 22.3 | 0.100 | 4d133 | 3263 | 0.978 | 9.200 | 9.780 | 6.30% |
| K | 1750 | HEAD | 03/09/2015 | 23.9 | 22.4 | 0.100 | 1008 | 3288 | 3.720 | 36.900 | 37.200 | 0.81% |
| B | 1900 | HEAD | 03/16/2015 | 24.1 | 23.4 | 0.100 | 5d148 | 3334 | 4.140 | 40.600 | 41.400 | 1.97% |
| E | 2450 | HEAD | 03/09/2015 | 23.1 | 22.7 | 0.100 | 719 | 3332 | 4.970 | 52.100 | 49.700 | -4.61% |
| B | 750 | BODY | 04/27/2015 | 22.3 | 21.3 | 0.100 | 1046 | 3334 | 0.869 | 8.290 | 8.690 | 4.83% |
| D | 835 | BODY | 04/27/2015 | 22.1 | 21.7 | 0.100 | 4d133 | 3209 | 0.935 | 9.350 | 9.350 | 0.00% |
| G | 1750 | BODY | 04/27/2015 | 22.3 | 21.4 | 0.100 | 1008 | 3318 | 3.580 | 37.600 | 35.800 | -4.79% |
| K | 1900 | BODY | 04/25/2015 | 21.5 | 23.5 | 0.100 | 5d149 | 3288 | 4.270 | 40.400 | 42.700 | 5.69% |
| A | 2450 | BODY | 04/27/2015 | 21.8 | 23.2 | 0.050 | 882 | 3331 | 2.720 | 50.700 | 54.400 | 7.30% |

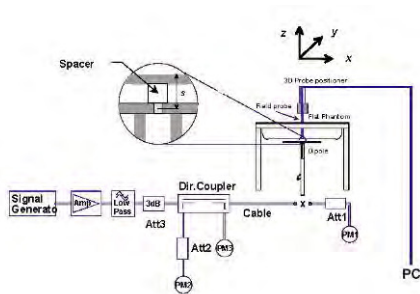




Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 28 of 41 | |

11 SAR DATA SUMMARY



11.1 Standalone Head SAR Data

**Table 11-1
Cell. CDMA Head SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | |
|---|-----|------------|------------|-----------------------------|-----------------------|------------------|---|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY | | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz | Ch. | | | | | | | | | | (W/kg) | | (W/kg) | |
| 836.52 | 384 | Cell. CDMA | RC3 / SO55 | 25.0 | 24.65 | 0.02 | Right | Cheek | 990004756080085 | 1:1 | 0.610 | 1.084 | 0.661 | |
| 836.52 | 384 | Cell. CDMA | RC3 / SO55 | 25.0 | 24.65 | 0.09 | Right | Tilt | 990004756080085 | 1:1 | 0.391 | 1.084 | 0.424 | |
| 836.52 | 384 | Cell. CDMA | RC3 / SO55 | 25.0 | 24.65 | 0.02 | Left | Cheek | 990004756080085 | 1:1 | 0.656 | 1.084 | 0.711 | |
| 836.52 | 384 | Cell. CDMA | RC3 / SO55 | 25.0 | 24.65 | 0.08 | Left | Tilt | 990004756080085 | 1:1 | 0.395 | 1.084 | 0.428 | |
| 836.52 | 384 | Cell. CDMA | EVDO RevA | 25.0 | 24.94 | 0.00 | Right | Cheek | 990004756080085 | 1:1 | 0.589 | 1.014 | 0.597 | |
| 836.52 | 384 | Cell. CDMA | EVDO RevA | 25.0 | 24.94 | 0.06 | Right | Tilt | 990004756080085 | 1:1 | 0.363 | 1.014 | 0.368 | |
| 836.52 | 384 | Cell. CDMA | EVDO RevA | 25.0 | 24.94 | 0.05 | Left | Cheek | 990004756080085 | 1:1 | 0.701 | 1.014 | 0.711 | A1 |
| 836.52 | 384 | Cell. CDMA | EVDO RevA | 25.0 | 24.94 | 0.10 | Left | Tilt | 990004756080085 | 1:1 | 0.408 | 1.014 | 0.414 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | |

**Table 11-2
PCS CDMA Head SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | |
|---|-----|-----------|------------|-----------------------------|-----------------------|------------------|---|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY | | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz | Ch. | | | | | | | | | | (W/kg) | | (W/kg) | |
| 1880.00 | 600 | PCS CDMA | RC3 / SO55 | 25.0 | 24.75 | 0.08 | Right | Cheek | 990004756086298 | 1:1 | 0.307 | 1.059 | 0.325 | |
| 1880.00 | 600 | PCS CDMA | RC3 / SO55 | 25.0 | 24.75 | -0.09 | Right | Tilt | 990004756086298 | 1:1 | 0.196 | 1.059 | 0.208 | |
| 1880.00 | 600 | PCS CDMA | RC3 / SO55 | 25.0 | 24.75 | -0.19 | Left | Cheek | 990004756086298 | 1:1 | 0.423 | 1.059 | 0.448 | A2 |
| 1880.00 | 600 | PCS CDMA | RC3 / SO55 | 25.0 | 24.75 | 0.12 | Left | Tilt | 990004756086298 | 1:1 | 0.208 | 1.059 | 0.220 | |
| 1880.00 | 600 | PCS CDMA | EVDO RevA | 25.0 | 24.71 | 0.15 | Right | Cheek | 990004756086298 | 1:1 | 0.234 | 1.069 | 0.250 | |
| 1880.00 | 600 | PCS CDMA | EVDO RevA | 25.0 | 24.71 | -0.08 | Right | Tilt | 990004756086298 | 1:1 | 0.174 | 1.069 | 0.186 | |
| 1880.00 | 600 | PCS CDMA | EVDO RevA | 25.0 | 24.71 | -0.15 | Left | Cheek | 990004756086298 | 1:1 | 0.415 | 1.069 | 0.444 | |
| 1880.00 | 600 | PCS CDMA | EVDO RevA | 25.0 | 24.71 | 0.14 | Left | Tilt | 990004756086298 | 1:1 | 0.178 | 1.069 | 0.190 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 29 of 41 | |

**Table 11-3
LTE Band 13 Head SAR**



| MEASUREMENT RESULTS | | | | | | | | | | | | | | | | | | | |
|---|-------|------|-----------------|-----------------------------|-----------------------|------------------|----------|------|---------------|---|---------|-----------|----------------------|-----------------|----------|----------------|-----------------|--------|----|
| FREQUENCY | | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Side | Test Position | Modulation | RB Size | RB Offset | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # | |
| MHz | Ch. | | | | | | | | | | | | | | (W/kg) | | (W/kg) | | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 24.0 | 23.93 | -0.04 | 0 | Right | Cheek | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.345 | 1.016 | 0.351 | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 23.0 | 22.72 | 0.01 | 1 | Right | Cheek | QPSK | 25 | 25 | 990004756080085 | 1:1 | 0.265 | 1.067 | 0.283 | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 24.0 | 23.93 | 0.17 | 0 | Right | Tilt | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.210 | 1.016 | 0.213 | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 23.0 | 22.72 | 0.02 | 1 | Right | Tilt | QPSK | 25 | 25 | 990004756080085 | 1:1 | 0.156 | 1.067 | 0.166 | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 24.0 | 23.93 | 0.04 | 0 | Left | Cheek | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.407 | 1.016 | 0.414 | A3 |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 23.0 | 22.72 | 0.01 | 1 | Left | Cheek | QPSK | 25 | 25 | 990004756080085 | 1:1 | 0.383 | 1.067 | 0.409 | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 24.0 | 23.93 | 0.01 | 0 | Left | Tilt | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.206 | 1.016 | 0.209 | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 23.0 | 22.72 | -0.08 | 1 | Left | Tilt | QPSK | 25 | 25 | 990004756080085 | 1:1 | 0.196 | 1.067 | 0.209 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | | |

**Table 11-4
LTE Band 4 (AWS) Head SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | | | | | |
|---|-------|------|------------------|-----------------------------|-----------------------|------------------|----------|------|---------------|---|---------|-----------|----------------------|-----------------|----------|----------------|-----------------|--------|----|
| FREQUENCY | | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Side | Test Position | Modulation | RB Size | RB Offset | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # | |
| MHz | Ch. | | | | | | | | | | | | | | (W/kg) | | (W/kg) | | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 24.0 | 23.94 | 0.02 | 0 | Right | Cheek | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.216 | 1.014 | 0.219 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 23.0 | 22.60 | 0.13 | 1 | Right | Cheek | QPSK | 50 | 0 | 990004756080085 | 1:1 | 0.161 | 1.096 | 0.176 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 24.0 | 23.94 | -0.04 | 0 | Right | Tilt | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.133 | 1.014 | 0.135 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 23.0 | 22.60 | -0.07 | 1 | Right | Tilt | QPSK | 50 | 0 | 990004756080085 | 1:1 | 0.119 | 1.096 | 0.130 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 24.0 | 23.94 | -0.07 | 0 | Left | Cheek | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.298 | 1.014 | 0.302 | A4 |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 23.0 | 22.60 | 0.02 | 1 | Left | Cheek | QPSK | 50 | 0 | 990004756080085 | 1:1 | 0.249 | 1.096 | 0.273 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 24.0 | 23.94 | -0.05 | 0 | Left | Tilt | QPSK | 1 | 0 | 990004756080085 | 1:1 | 0.181 | 1.014 | 0.184 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 23.0 | 22.60 | 0.05 | 1 | Left | Tilt | QPSK | 50 | 0 | 990004756080085 | 1:1 | 0.151 | 1.096 | 0.165 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | | |

**Table 11-5
DTS Head SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | |
|---|-----|--------------|---------|-----------------------------|-----------------------|------------------|-------|---------------|----------------------|---|------------|----------|----------------|-----------------|--------|
| FREQUENCY | | Mode | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side | Test Position | Device Serial Number | Data Rate (Mbps) | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz | Ch. | | | | | | | | | | | (W/kg) | | (W/kg) | |
| 2437 | 6 | IEEE 802.11b | DSSS | 14.5 | 14.49 | 0.00 | Right | Cheek | 990004756081075 | 1 | 1:1 | 0.325 | 1.002 | 0.326 | |
| 2437 | 6 | IEEE 802.11b | DSSS | 14.5 | 14.49 | 0.04 | Right | Tilt | 990004756081075 | 1 | 1:1 | 0.349 | 1.002 | 0.350 | |
| 2437 | 6 | IEEE 802.11b | DSSS | 14.5 | 14.49 | 0.02 | Left | Cheek | 990004756081075 | 1 | 1:1 | 0.532 | 1.002 | 0.533 | A5 |
| 2437 | 6 | IEEE 802.11b | DSSS | 14.5 | 14.49 | 0.02 | Left | Tilt | 990004756081075 | 1 | 1:1 | 0.403 | 1.002 | 0.404 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | | | |

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 30 of 41 |

11.2 Standalone Body-Worn SAR Data

**Table 11-6
CDMA Body-Worn SAR Data**



| MEASUREMENT RESULTS | | | | | | | | | | | | | | |
|---|-----|------------|-------------|-----------------------------|-----------------------|------------------|---|----------------------|------------|------|-----------------|----------------|------------------------|--------|
| FREQUENCY | | Mode | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | Duty Cycle | Side | SAR (1g) (W/kg) | Scaling Factor | Scaled SAR (1g) (W/kg) | Plot # |
| MHz | Ch. | | | | | | | | | | | | | |
| 836.52 | 384 | Cell. CDMA | TDSO / SO32 | 25.0 | 24.95 | 0.00 | 15 mm | 990004756080085 | 1:1 | back | 0.638 | 1.012 | 0.646 | A6 |
| 1880.00 | 600 | PCS CDMA | TDSO / SO32 | 25.0 | 24.70 | 0.00 | 15 mm | 990004756086298 | 1:1 | back | 0.440 | 1.072 | 0.472 | A7 |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | |

**Table 11-7
LTE Body-Worn SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | | | | | |
|---|-------|------|------------------|-----------------------------|-----------------------|------------------|---|----------------------|-----------------|---------|-----------|---------|-------|------------|-----------------|----------------|------------------------|--------|----|
| FREQUENCY | | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number | Modulation | RB Size | RB Offset | Spacing | Side | Duty Cycle | SAR (1g) (W/kg) | Scaling Factor | Scaled SAR (1g) (W/kg) | Plot # | |
| MHz | Ch. | | | | | | | | | | | | | | | | | | |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 24.0 | 23.93 | -0.13 | 0 | 990004756080085 | QPSK | 1 | 0 | 15 mm | back | 1:1 | 0.654 | 1.016 | 0.664 | A8 |
| 782.00 | 23230 | Mid | LTE Band 13 | 10 | 23.0 | 22.72 | -0.04 | 1 | 990004756080085 | QPSK | 25 | 25 | 15 mm | back | 1:1 | 0.545 | 1.067 | 0.582 | |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 24.0 | 23.94 | 0.12 | 0 | 990004756080085 | QPSK | 1 | 0 | 15 mm | back | 1:1 | 0.390 | 1.014 | 0.395 | A9 |
| 1732.50 | 20175 | Mid | LTE Band 4 (AWS) | 20 | 23.0 | 22.60 | 0.05 | 1 | 990004756080085 | QPSK | 50 | 0 | 15 mm | back | 1:1 | 0.316 | 1.096 | 0.346 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | | | | | |

**Table 11-8
DTS Body-Worn SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | |
|---|-----|--------------|---------|-----------------------------|-----------------------|------------------|---|----------------------|------------------|------|------------|-----------------|----------------|------------------------|--------|
| FREQUENCY | | Mode | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | Data Rate (Mbps) | Side | Duty Cycle | SAR (1g) (W/kg) | Scaling Factor | Scaled SAR (1g) (W/kg) | Plot # |
| MHz | Ch. | | | | | | | | | | | | | | |
| 2437 | 6 | IEEE 802.11b | DSSS | 14.5 | 14.49 | 0.07 | 15 mm | 990004756081075 | 1 | back | 1:1 | 0.058 | 1.002 | 0.058 | A10 |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 31 of 41 |



11.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01 v01, variability SAR tests are performed when the measured SAR results for a frequency band are greater than 0.8 W/kg. Variability measurements were not required since all measured SAR < 0.8 W/kg. Please see Section 13 for variability analysis.

CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO and TDSO / SO32 FCH+SCH SAR tests were not required since the average output power was not more than 0.25 dB higher than the TDSO / SO32 FCH only powers, per FCC KDB Publication 941225 D01.
3. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
4. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.



| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 32 of 41 |

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI operations: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. WIFI transmission was verified using an uncalibrated spectrum analyzer.
3. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other default channels was not required.

| | | | |
|---|--|--------------------------------------|--|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 33 of 41 |

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures



This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2.2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1
Estimated SAR**

| Mode | Frequency | Maximum Allowed Power | Separation Distance (Body) | Estimated SAR (Body) |
|------------------|-------------|-----------------------|----------------------------|----------------------|
| | [MHz] | [dBm] | [mm] | [W/kg] |
| Bluetooth | 2480 | 9.50 | 15 | 0.126 |

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

| | | | | |
|---|--|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST <small>ENGINEERING LABORATORY, INC.</small> | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 34 of 41 |

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

| Simult Tx | Configuration | Cell. CDMA SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) | Simult Tx | Configuration | PCS CDMA SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|-----------|---------------|-----------------------|-------------------------|--------------|-----------|---------------|---------------------|-------------------------|--------------|
| Head SAR | Right Cheek | 0.661 | 0.326 | 0.987 | Head SAR | Right Cheek | 0.325 | 0.326 | 0.651 |
| | Right Tilt | 0.424 | 0.350 | 0.774 | | Right Tilt | 0.208 | 0.350 | 0.558 |
| | Left Cheek | 0.711 | 0.533 | 1.244 | | Left Cheek | 0.448 | 0.533 | 0.981 |
| | Left Tilt | 0.428 | 0.404 | 0.832 | | Left Tilt | 0.220 | 0.404 | 0.624 |

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-3
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

| Configuration | Mode | CDMA SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|---------------|------------|-----------------|-------------------------|--------------|
| Back Side | Cell. CDMA | 0.646 | 0.058 | 0.704 |
| Back Side | PCS CDMA | 0.472 | 0.058 | 0.530 |



Table 12-4
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

| Configuration | Mode | CDMA/LTE SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|---------------|------------------|---------------------|----------------------|--------------|
| Back Side | Cell. CDMA | 0.646 | 0.126 | 0.772 |
| Back Side | PCS CDMA | 0.472 | 0.126 | 0.598 |
| Back Side | LTE Band 13 | 0.664 | 0.126 | 0.790 |
| Back Side | LTE Band 4 (AWS) | 0.395 | 0.126 | 0.521 |

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

12.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 35 of 41 | |



13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was not assessed for each frequency band since all measured SAR values are < 0.80 W/kg.

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.



| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 36 of 41 |

14 EQUIPMENT LIST

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|--------------------|------------|---|------------|--------------|------------|---------------|
| Gigatronics | 80701A | (0.05-18GHz) Power Sensor | 10/30/2014 | Annual | 10/30/2015 | 1833460 |
| Agilent | E8257D | (250kHz-20GHz) Signal Generator | 4/15/2014 | Annual | 4/15/2015 | MY45470194 |
| Agilent | 8753E | (30kHz-6GHz) Network Analyzer | 12/30/2014 | Annual | 12/30/2015 | JP38020182 |
| Agilent | 8594A | (9kHz-2.9GHz) Spectrum Analyzer | N/A | N/A | N/A | 3051A00187 |
| Agilent | 8648D | (9kHz-4GHz) Signal Generator | 4/15/2014 | Annual | 4/15/2015 | 3629U00687 |
| SPEAG | D750V3 | 750 MHz Dipole | 1/16/2015 | Annual | 1/16/2016 | 1003 |
| SPEAG | D750V3 | 750 MHz Dipole | 2/19/2015 | Annual | 2/19/2016 | 1046 |
| SPEAG | D835V2 | 835 MHz SAR Dipole | 7/24/2014 | Annual | 7/24/2015 | 4d133 |
| SPEAG | D1765V2 | 1765 MHz SAR Dipole | 5/7/2014 | Annual | 5/7/2015 | 1008 |
| SPEAG | D1900V2 | 1900 MHz SAR Dipole | 7/23/2014 | Annual | 7/23/2015 | 5d149 |
| SPEAG | D1900V2 | 1900 MHz SAR Dipole | 2/18/2015 | Annual | 2/18/2016 | 5d148 |
| SPEAG | D2450V2 | 2450 MHz SAR Dipole | 8/11/2014 | Annual | 8/11/2015 | 719 |
| SPEAG | D2450V2 | 2450 MHz SAR Dipole | 2/18/2015 | Annual | 2/18/2016 | 882 |
| SPEAG | ES3DV3 | SAR Probe | 5/15/2014 | Annual | 5/15/2015 | 3263 |
| SPEAG | ES3DV2 | SAR Probe | 8/19/2014 | Annual | 8/19/2015 | 3022 |
| SPEAG | ES3DV3 | SAR Probe | 9/18/2014 | Annual | 9/18/2015 | 3332 |
| SPEAG | ES3DV3 | SAR Probe | 9/24/2014 | Annual | 9/24/2015 | 3288 |
| SPEAG | ES3DV3 | SAR Probe | 3/19/2015 | Annual | 3/19/2016 | 3209 |
| SPEAG | ES3DV3 | SAR Probe | 12/16/2014 | Annual | 12/16/2015 | 3334 |
| SPEAG | ES3DV3 | SAR Probe | 1/23/2015 | Annual | 1/23/2016 | 3318 |
| SPEAG | ES3DV3 | SAR Probe | 8/20/2014 | Annual | 8/20/2015 | 3331 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 5/14/2014 | Annual | 5/14/2015 | 859 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 8/12/2014 | Annual | 8/12/2015 | 1322 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 9/17/2014 | Annual | 9/17/2015 | 1323 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 9/18/2014 | Annual | 9/18/2015 | 1364 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 3/13/2015 | Annual | 3/13/2016 | 1334 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 12/12/2014 | Annual | 12/12/2015 | 1415 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 1/14/2015 | Annual | 1/14/2016 | 1272 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 10/31/2014 | Annual | 10/31/2015 | 1333 |
| Rohde & Schwarz | CMU200 | Base Station Simulator | 4/24/2014 | Annual | 4/24/2015 | 836371/0079 |
| Rohde & Schwarz | CMU200 | Base Station Simulator | 6/6/2014 | Annual | 6/6/2015 | 109892 |
| SPEAG | DAK-3.5 | Dielectric Assessment Kit | 5/6/2014 | Annual | 5/6/2015 | 1070 |
| Mitutoyo | CD-6°CSX | Digital Caliper | 5/8/2014 | Biennial | 5/8/2016 | 13264162 |
| Fisher Scientific | 15-077-960 | Digital Thermometer | 12/4/2013 | Biennial | 12/4/2015 | 130764558 |
| Agilent | E4438C | ESG Vector Signal Generator | 3/31/2014 | Annual | 3/31/2015 | MY42082659 |
| Agilent | E4438C | ESG Vector Signal Generator | 3/15/2015 | Annual | 3/15/2016 | MY45091346 |
| Control Company | 4052 | Long Stem Thermometer | 9/27/2013 | Biennial | 9/27/2015 | 130567447 |
| Agilent | N5182A | MXG Vector Signal Generator | 4/15/2014 | Annual | 4/15/2015 | MY47420800 |
| Agilent | N5182A | MXG Vector Signal Generator | 3/16/2015 | Annual | 3/16/2016 | MY47420651 |
| SPEAG | DAKS-3.5 | Portable Dielectric Assessment Kit | 7/15/2014 | Annual | 7/15/2015 | 1039 |
| Anritsu | MA2411B | Pulse Power Sensor | 3/25/2014 | Annual | 3/25/2015 | 1207470 |
| Anritsu | MA2411B | Pulse Power Sensor | 11/13/2014 | Annual | 11/13/2015 | 1339018 |
| Anritsu | ML2495A | Power Meter | 10/31/2013 | Biennial | 10/31/2015 | 941001 |
| Anritsu | ML2495A | Power Meter | 10/31/2013 | Biennial | 10/31/2015 | 1039008 |
| Anritsu | MT8820C | Radio Communication Analyzer | 5/6/2014 | Annual | 5/6/2015 | 6201144419 |
| Anritsu | MT8820C | Radio Communication Analyzer | 8/28/2014 | Annual | 8/28/2015 | 6201240328 |
| Rohde & Schwarz | CMW500 | Radio Communication Tester | 4/17/2014 | Annual | 4/17/2015 | 101699 |
| Rohde & Schwarz | CMW500 | Radio Communication Tester | 4/17/2014 | Annual | 4/17/2015 | 102060 |
| Tektronix | RSA6114A | Real Time Spectrum Analyzer | 4/16/2014 | Annual | 4/16/2015 | B010177 |
| Agilent | 8753ES | S-Parameter Network Analyzer | 5/22/2014 | Annual | 5/22/2015 | US39170118 |
| Fisher Scientific | S97611 | Thermometer | 4/12/2013 | Biennial | 4/12/2015 | 130219303 |
| Fisher Scientific | S97611 | Thermometer | 4/12/2013 | Biennial | 4/12/2015 | 130219304 |
| Seekonk | NC-100 | Torque Wrench | 3/18/2014 | Biennial | 3/18/2016 | N/A |
| Seekonk | NC-100 | Torque Wrench 5/16", 8" lbs | 3/18/2014 | Biennial | 3/18/2016 | N/A |
| VWR | 36934-158 | Wall-Mounted Thermometer | 8/8/2013 | Biennial | 8/8/2015 | 130477877 |
| Amplifier Research | 15S1G6 | Amplifier | CBT | N/A | CBT | 433971 |
| Amplifier Research | 15S1G6 | Amplifier | CBT | N/A | CBT | 433972 |
| Narda | 4772-3 | Attenuator (3dB) | CBT | N/A | CBT | 9406 |
| MCL | BW-NGW5+ | 6dB Attenuator | CBT | N/A | CBT | 1139 |
| Mini-Circuits | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator | CBT | N/A | CBT | N/A |
| Mini-Circuits | BW-N20W5 | Power Attenuator | CBT | N/A | CBT | 1226 |
| Pasternack | PE2208-6 | Bidirectional Coupler | CBT | N/A | CBT | N/A |
| Pasternack | PE2209-10 | Bidirectional Coupler | CBT | N/A | CBT | N/A |
| MiniCircuits | SLP-2400+ | Low Pass Filter | CBT | N/A | CBT | R8979500903 |
| Mini-Circuits | NLP-1200+ | Low Pass Filter DC to 1000 MHz | CBT | N/A | CBT | N/A |
| Mini-Circuits | NLP-2950+ | Low Pass Filter DC to 2700 MHz | CBT | N/A | CBT | N/A |

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment item was used solely within its respective calibration period.



| | | | | |
|--------------------------------------|--|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 37 of 41 |

15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

| a | b | c | d | e= f(d,k) | f | g | h = c x f/e | i = c x g/e | k | |
|---|----------------------|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|-----|
| Uncertainty Component | IEEE 1528 Sec. | Tol. (± %) | Prob. Dist. | Div. | c _i 1gm | c _i 10 gms | 1gm u _i (± %) | 10gms u _i (± %) | v _i | |
| Measurement System | | | | | | | | | | |
| Probe Calibration | E.2.1 | 6.0 | N | 1 | 1.0 | 1.0 | 6.0 | 6.0 | ∞ | |
| Axial Isotropy | E.2.2 | 0.25 | N | 1 | 0.7 | 0.7 | 0.2 | 0.2 | ∞ | |
| Hemishperical Isotropy | E.2.2 | 1.3 | N | 1 | 1.0 | 1.0 | 1.3 | 1.3 | ∞ | |
| Boundary Effect | E.2.3 | 0.4 | N | 1 | 1.0 | 1.0 | 0.4 | 0.4 | ∞ | |
| Linearity | E.2.4 | 0.3 | N | 1 | 1.0 | 1.0 | 0.3 | 0.3 | ∞ | |
| System Detection Limits | E.2.5 | 5.1 | N | 1 | 1.0 | 1.0 | 5.1 | 5.1 | ∞ | |
| Readout Electronics | E.2.6 | 1.0 | N | 1 | 1.0 | 1.0 | 1.0 | 1.0 | ∞ | |
| Response Time | E.2.7 | 0.8 | R | 1.73 | 1.0 | 1.0 | 0.5 | 0.5 | ∞ | |
| Integration Time | E.2.8 | 2.6 | R | 1.73 | 1.0 | 1.0 | 1.5 | 1.5 | ∞ | |
| RF Ambient Conditions | E.6.1 | 3.0 | R | 1.73 | 1.0 | 1.0 | 1.7 | 1.7 | ∞ | |
| Probe Positioner Mechanical Tolerance | E.6.2 | 0.4 | R | 1.73 | 1.0 | 1.0 | 0.2 | 0.2 | ∞ | |
| Probe Positioning w/ respect to Phantom | E.6.3 | 2.9 | R | 1.73 | 1.0 | 1.0 | 1.7 | 1.7 | ∞ | |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | E.5 | 1.0 | R | 1.73 | 1.0 | 1.0 | 0.6 | 0.6 | ∞ | |
| Test Sample Related | | | | | | | | | | |
| Test Sample Positioning | E.4.2 | 6.0 | N | 1 | 1.0 | 1.0 | 6.0 | 6.0 | 287 | |
| Device Holder Uncertainty | E.4.1 | 3.32 | R | 1.73 | 1.0 | 1.0 | 1.9 | 1.9 | ∞ | |
| Output Power Variation - SAR drift measurement | 6.6.2 | 5.0 | R | 1.73 | 1.0 | 1.0 | 2.9 | 2.9 | ∞ | |
| Phantom & Tissue Parameters | | | | | | | | | | |
| Phantom Uncertainty (Shape & Thickness tolerances) | E.3.1 | 4.0 | R | 1.73 | 1.0 | 1.0 | 2.3 | 2.3 | ∞ | |
| Liquid Conductivity - deviation from target values | E.3.2 | 5.0 | R | 1.73 | 0.64 | 0.43 | 1.8 | 1.2 | ∞ | |
| Liquid Conductivity - measurement uncertainty | E.3.3 | 3.8 | N | 1 | 0.64 | 0.43 | 2.4 | 1.6 | 6 | |
| Liquid Permittivity - deviation from target values | E.3.2 | 5.0 | R | 1.73 | 0.60 | 0.49 | 1.7 | 1.4 | ∞ | |
| Liquid Permittivity - measurement uncertainty | E.3.3 | 4.5 | N | 1 | 0.60 | 0.49 | 2.7 | 2.2 | 6 | |
| Combined Standard Uncertainty (k=1) | | | | | | | RSS | 12.1 | 11.7 | 299 |
| Expanded Uncertainty (95% CONFIDENCE LEVEL) | | | | | | | k=2 | 24.2 | 23.5 | |

The above measurement uncertainties are according to IEEE Std. 1528-2003



| | | | |
|--------------------------------------|--|-------------------------------|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 38 of 41 |

16 CONCLUSION

16.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 39 of 41 |

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

| | | | |
|---|--|--------------------------------------|--|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT  | | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | Page 40 of 41 |

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices and UMPC Devices KDB Publications 941225, D01-D05
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMS978L |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Document S/N: 0Y1503040516-R2.A3L | Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | Page 41 of 41 |

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756080085

Communication System: UID 0, Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.52 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 40.174$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-12-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3263; ConvF(6.23, 6.23, 6.23); Calibrated: 5/15/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. EVDO Rev. A, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.58 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.882 W/kg

SAR (1 g) = 0.701 W/kg

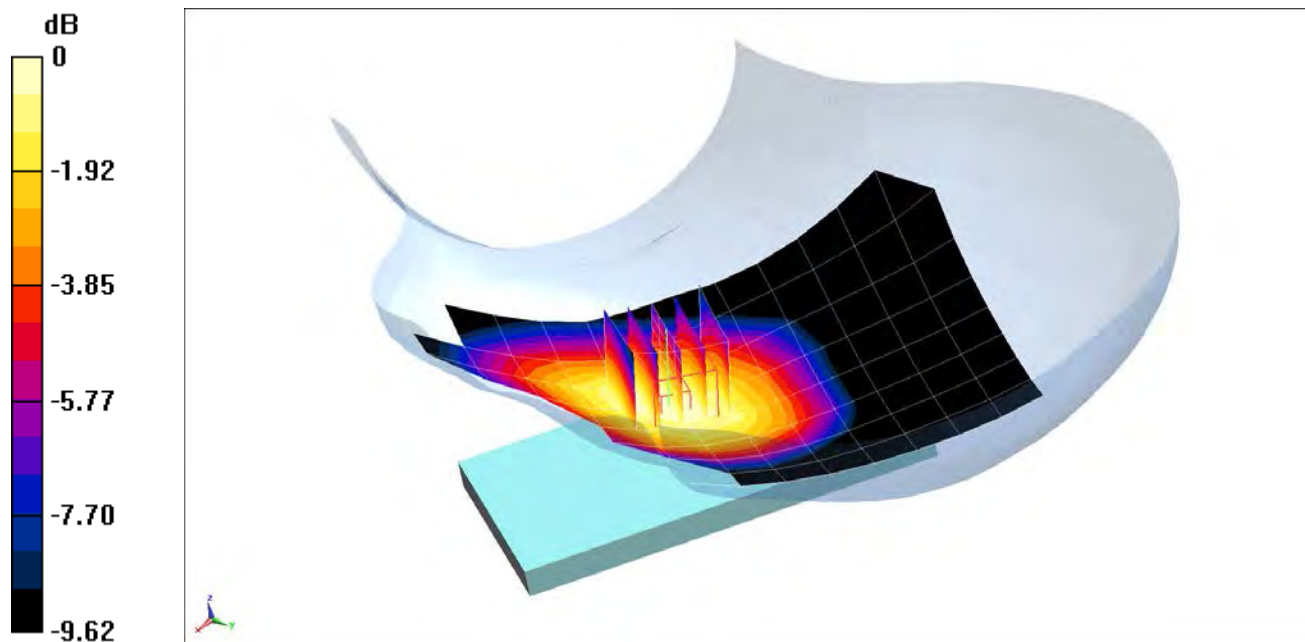

0 dB = 0.773 W/kg = -1.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756086298

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 38.182$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 03-16-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3334; ConvF(5.03, 5.03, 5.03); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: PCS CDMA, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.82 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR (1 g) = 0.423 W/kg

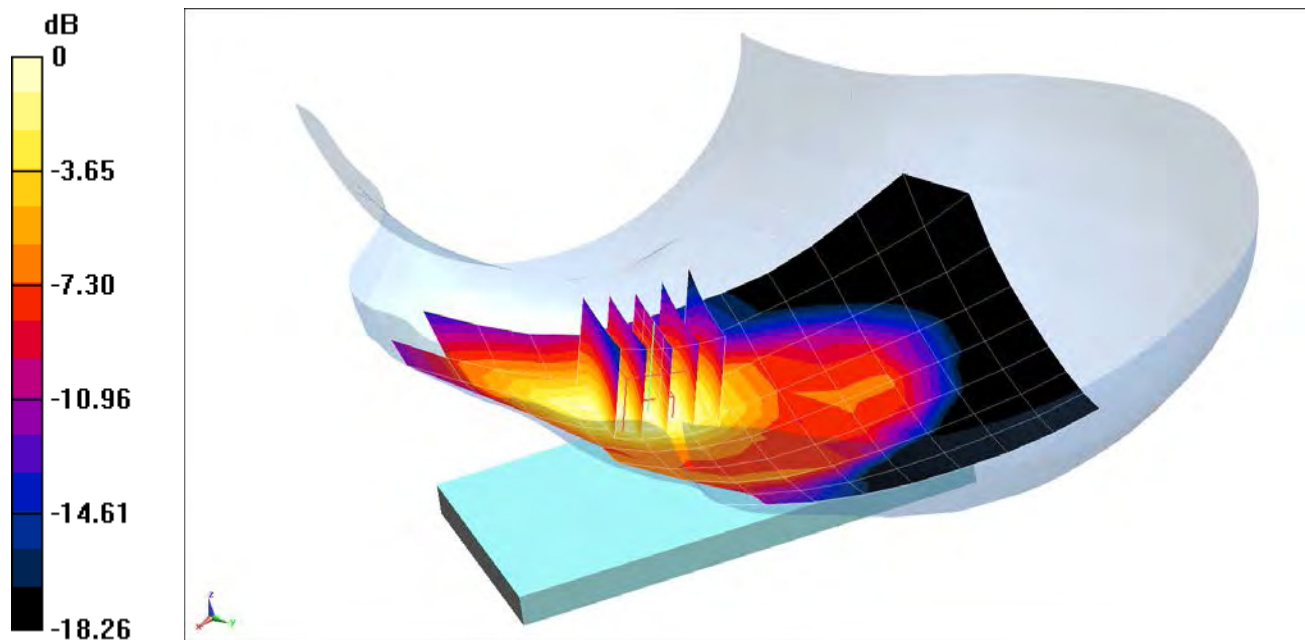

0 dB = 0.507 W/kg = -2.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756080085

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 41.032$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-10-2015; Ambient Temp: 23.1°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.39, 6.39, 6.39); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch, QPSK
10 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.08 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR (1 g) = 0.407 W/kg

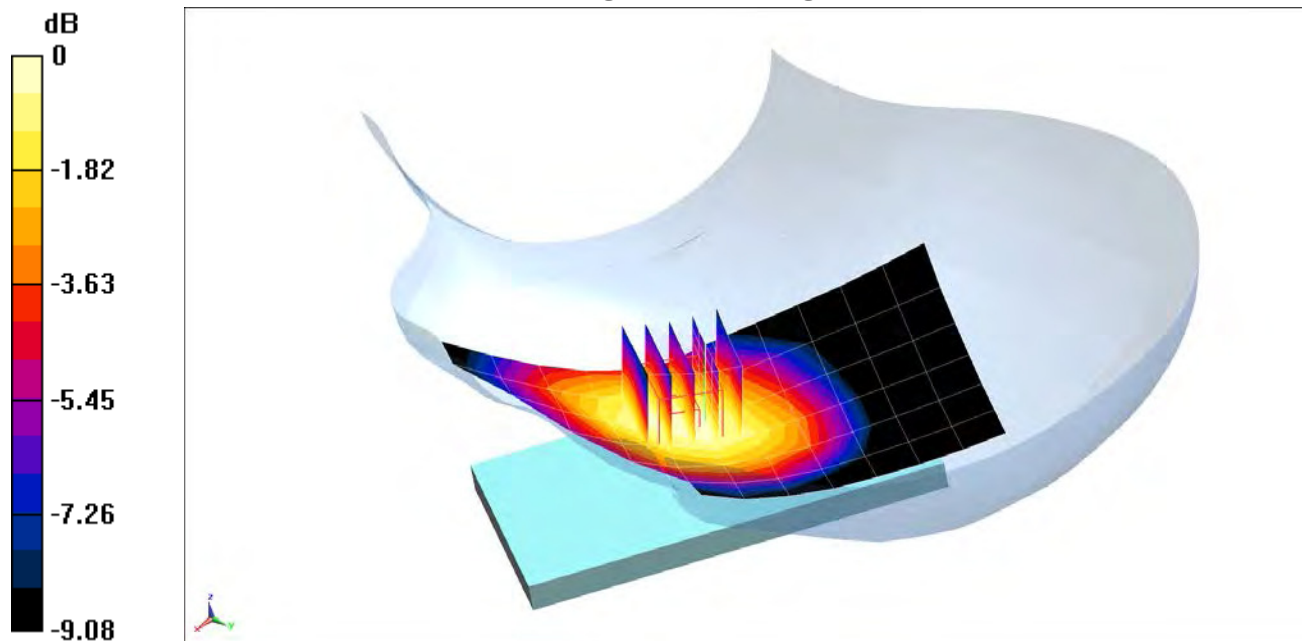

0 dB = 0.452 W/kg = -3.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756080085

Communication System: UID 0, LTE RF Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.308$ S/m; $\epsilon_r = 38.667$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 03-09-2015; Ambient Temp: 23.9°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(5.38, 5.38, 5.38); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch, QPSK
20 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.77 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR (1 g) = 0.298 W/kg

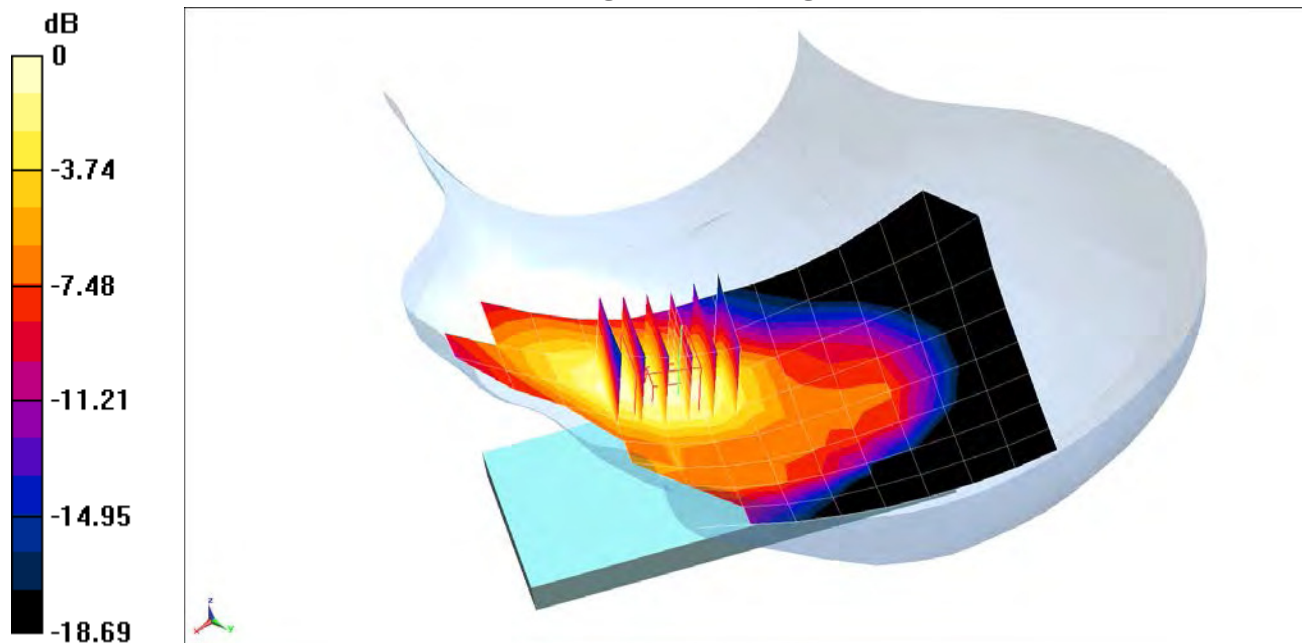

0 dB = 0.341 W/kg = -4.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756081075

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 39.114$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 03-09-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3332; ConvF(4.49, 4.49, 4.49); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, Left Head, Cheek, Ch 6, 1 Mbps


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.33 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR (1 g) = 0.532 W/kg

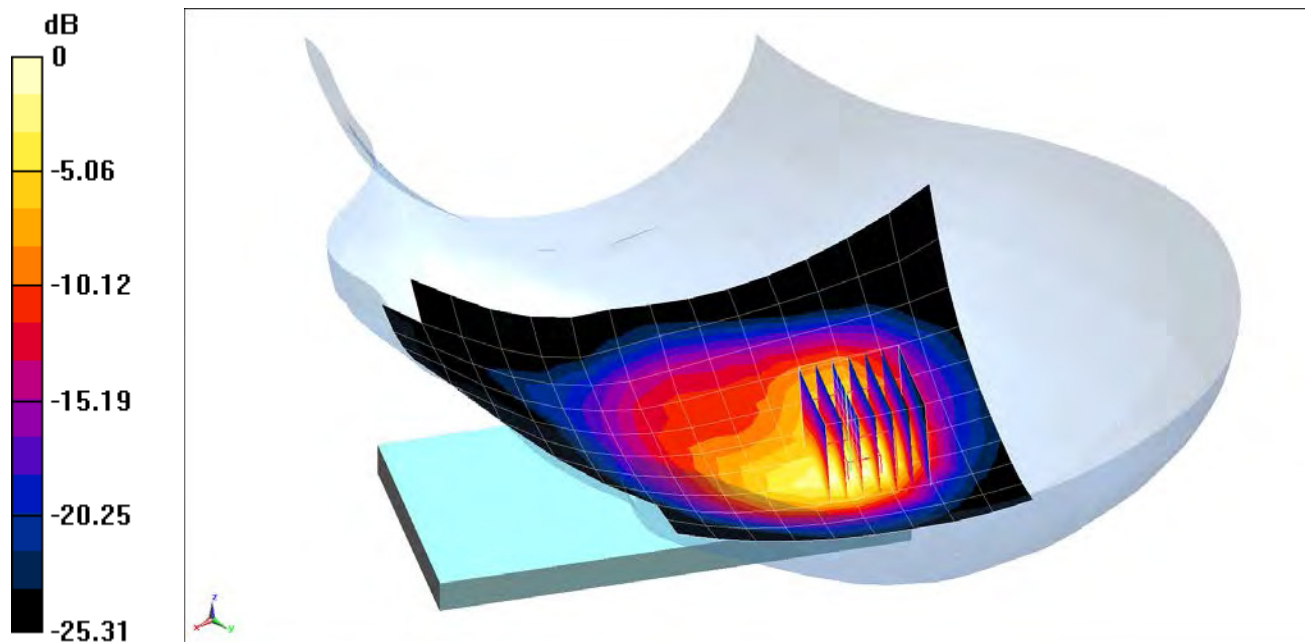

0 dB = 0.712 W/kg = -1.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756080085

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.52$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.305$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-27-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015
Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. CDMA, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.14 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.800 W/kg

SAR (1 g) = 0.638 W/kg

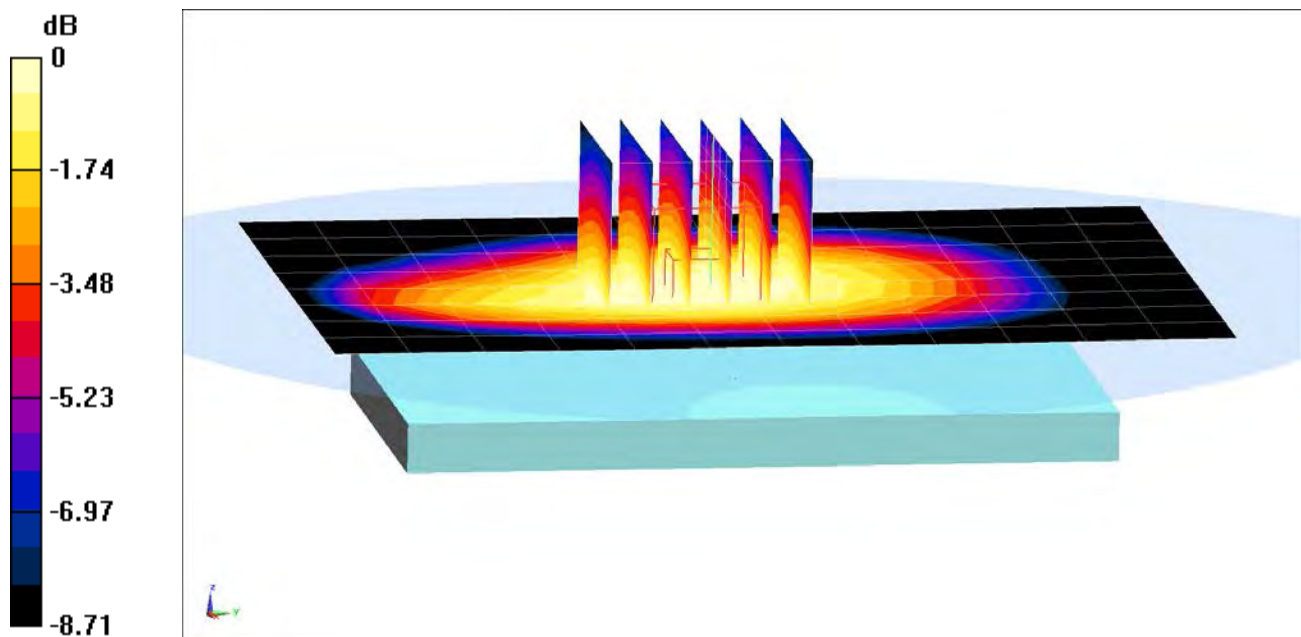

0 dB = 0.696 W/kg = -1.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756086298

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 51.377$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-25-2015; Ambient Temp: 21.5°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.09 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR (1 g) = 0.440 W/kg

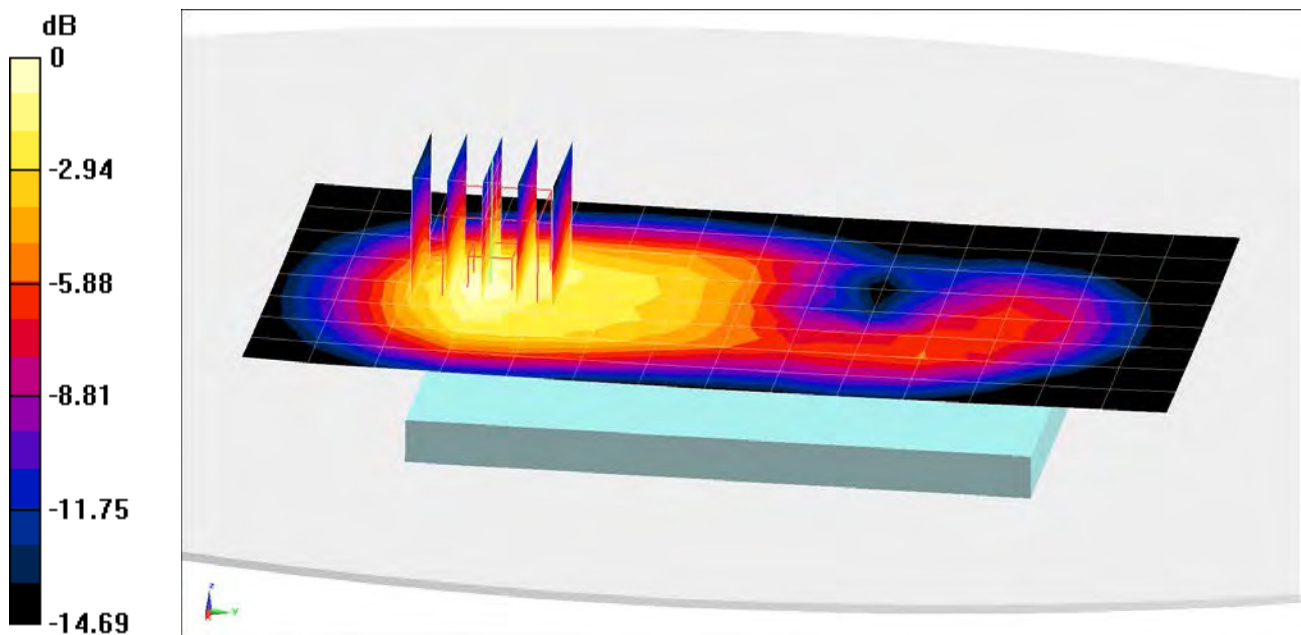

0 dB = 0.520 W/kg = -2.84 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756080085

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 54.652$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-27-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3334; ConvF(6.09, 6.09, 6.09); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, QPSK
10 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.89 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.811 W/kg

SAR (1 g) = 0.654 W/kg

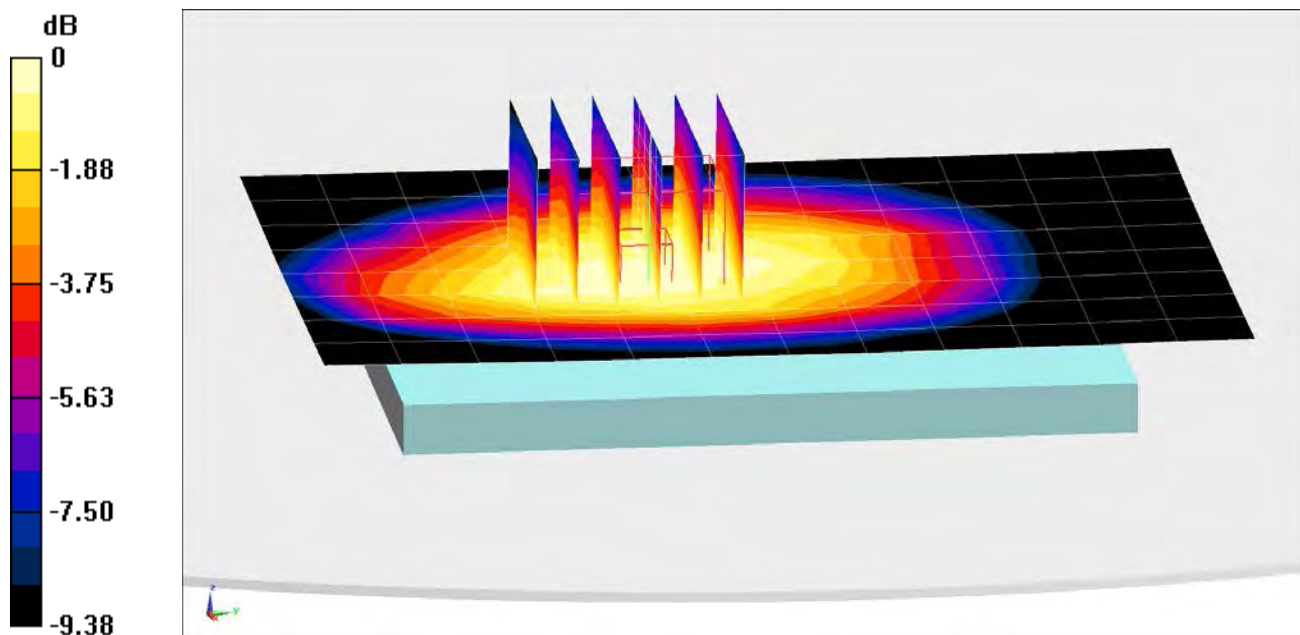

0 dB = 0.725 W/kg = -1.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756080085

Communication System: UID 0, LTE Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.5$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 52.947$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-27-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(4.95, 4.95, 4.95); Calibrated: 1/23/2015;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch, QPSK
20 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.606 W/kg

SAR (1 g) = 0.390 W/kg

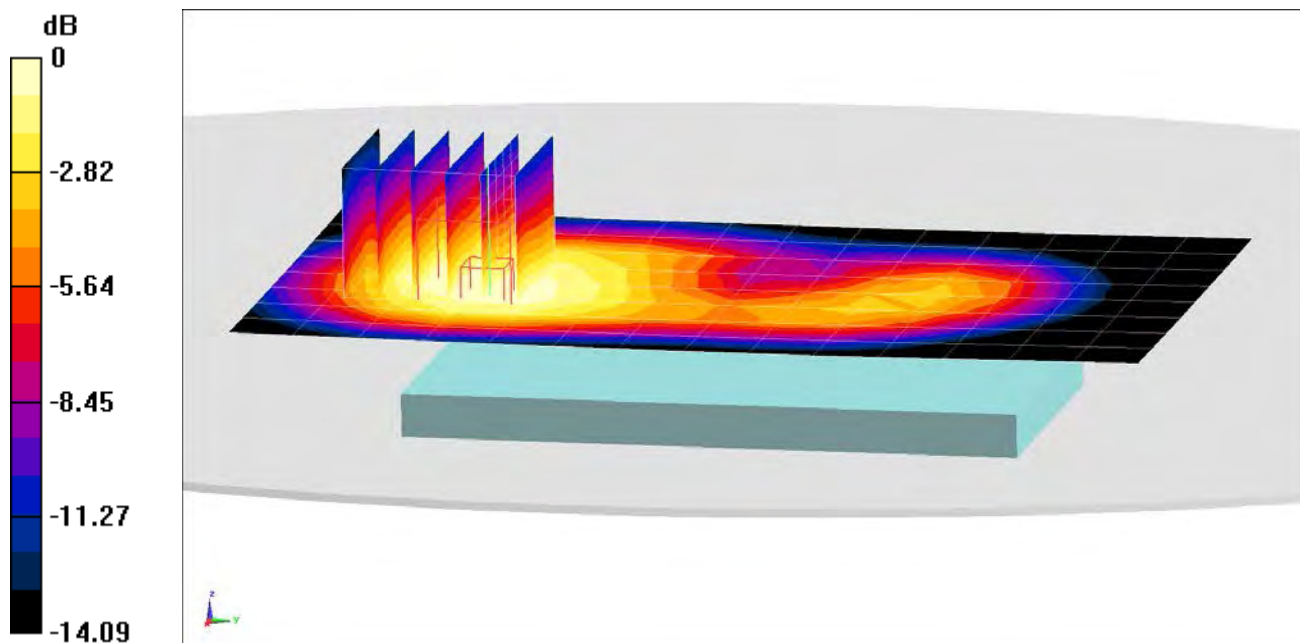

0 dB = 0.458 W/kg = -3.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS978L; Type: Portable Handset; Serial: 990004756081075

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.993 \text{ S/m}$; $\epsilon_r = 50.385$ $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-27-2015; Ambient Temp: 21.8°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3331; ConvF(4.29, 4.29, 4.29); Calibrated: 8/20/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, Body SAR, Ch 6, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.628 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR (1 g) = 0.058 W/kg

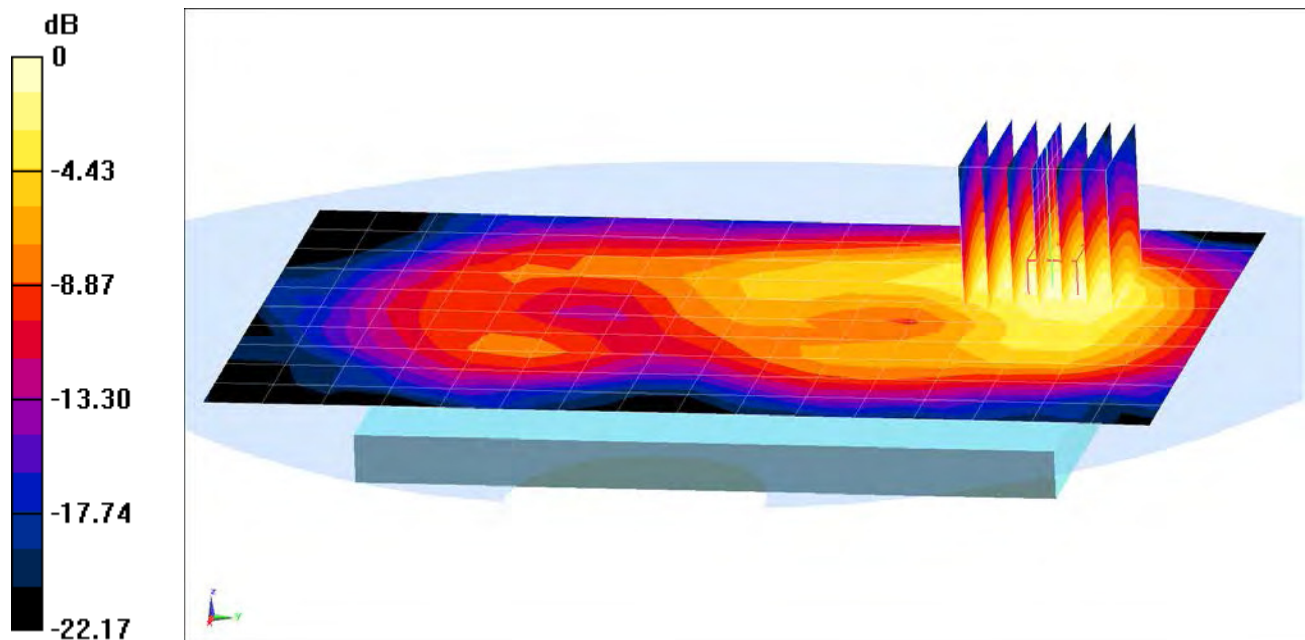

0 dB = 0.175 W/kg = -7.57 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 750 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.525$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-10-2015; Ambient Temp: 23.1°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(6.39, 6.39, 6.39); Calibrated: 8/19/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.17 W/kg

SAR (1 g) = 0.800 W/kg

Deviation = -1.11%

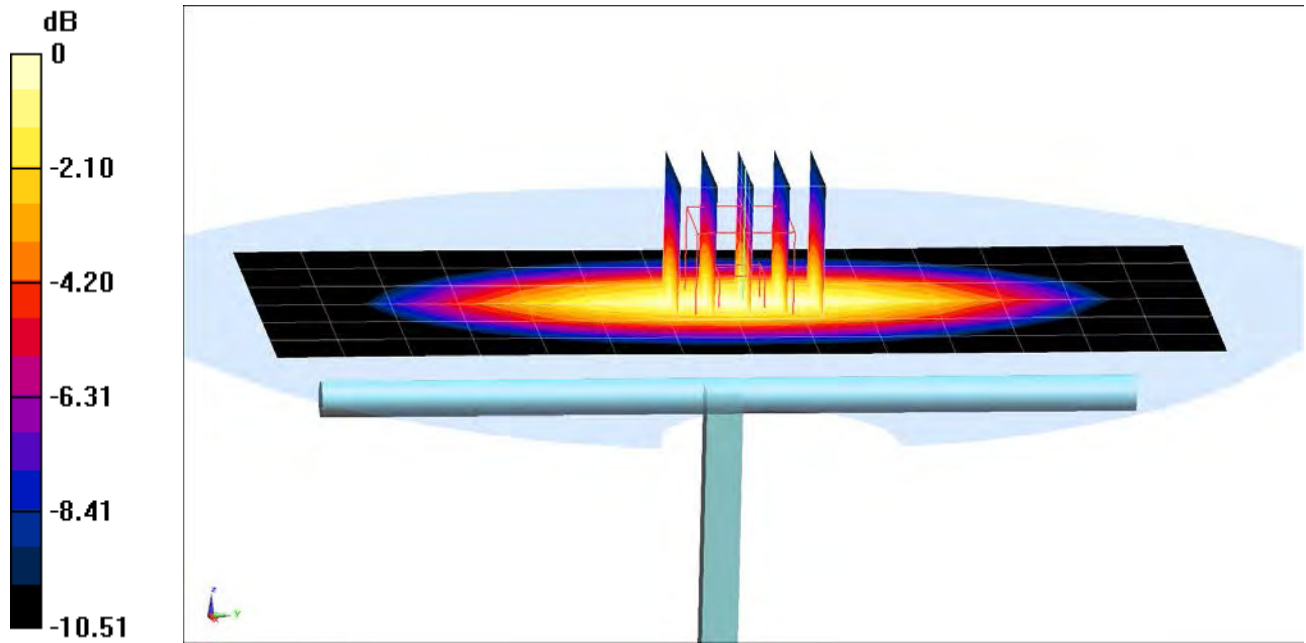

0 dB = 0.935 W/kg = -0.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133


Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used:
 $f = 835 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 40.194$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-12-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3263; ConvF(6.23, 6.23, 6.23); Calibrated: 5/15/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 5/14/2014
Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20 dBm (100 mW)
Peak SAR (extrapolated) = 1.46 W/kg
SAR (1 g) = 0.978 W/kg
Deviation = 6.30%

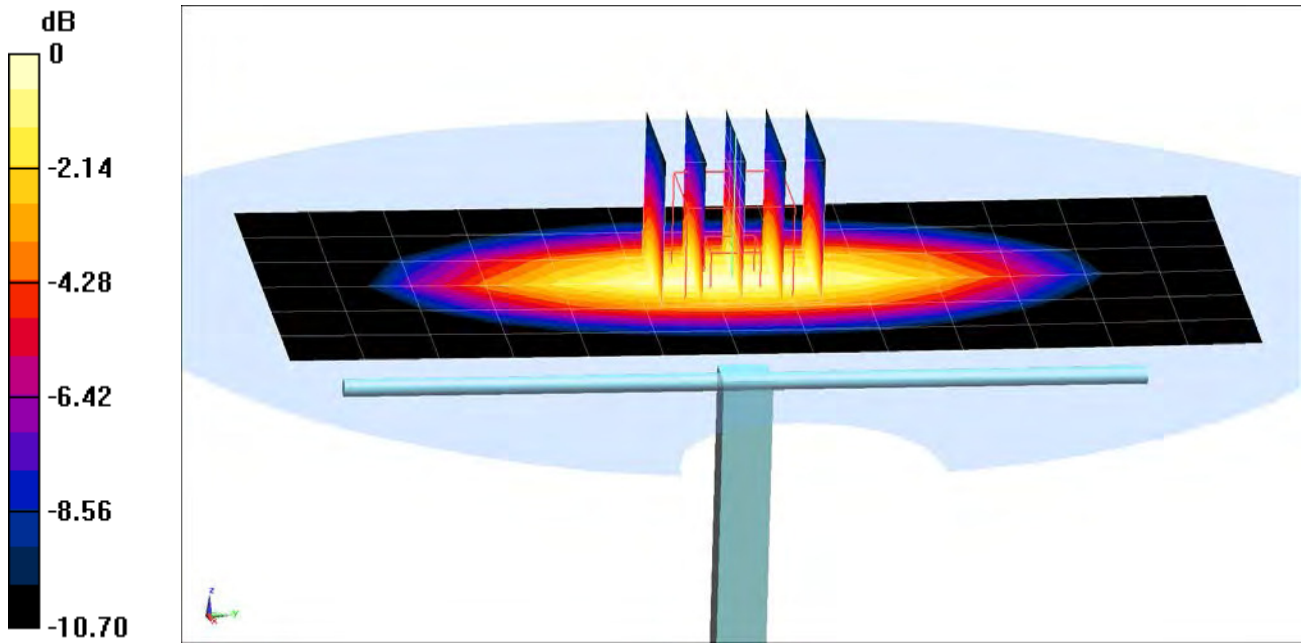

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used:
 $f = 1750 \text{ MHz}$; $\sigma = 1.325 \text{ S/m}$; $\epsilon_r = 38.599$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2015; Ambient Temp: 23.9°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(5.38, 5.38, 5.38); Calibrated: 9/24/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.71 W/kg

SAR (1 g) = 3.72 W/kg

Deviation = 0.81%

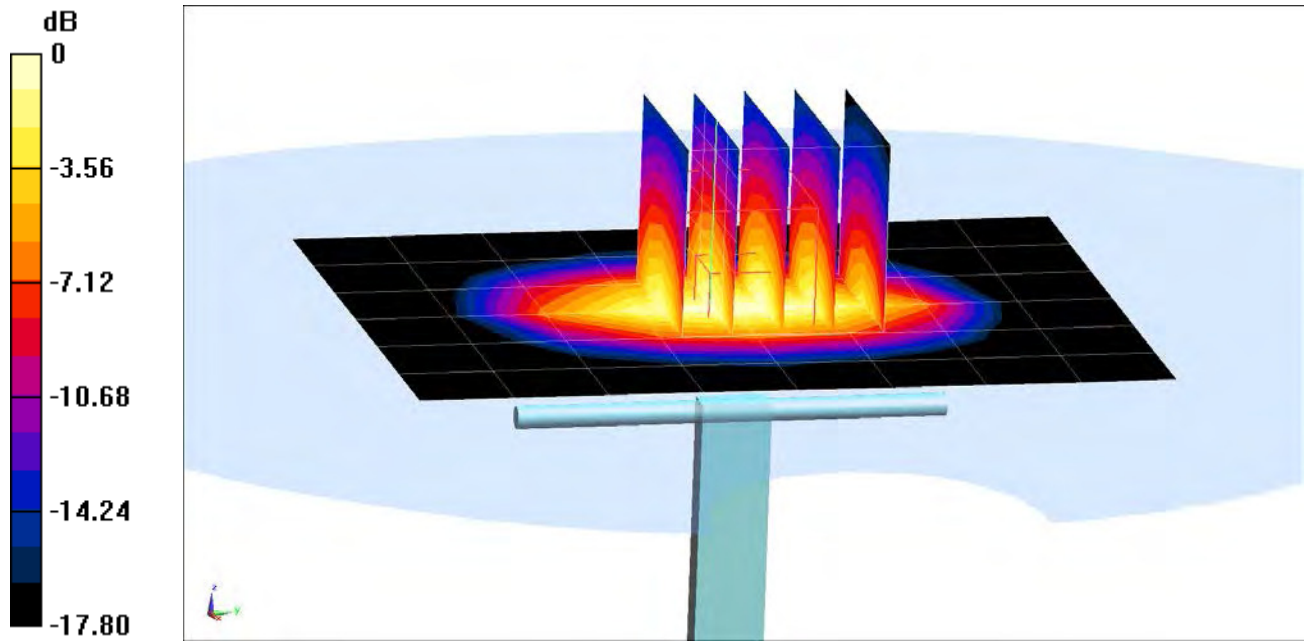

0 dB = 4.61 W/kg = 6.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.425 \text{ S/m}$; $\epsilon_r = 38.11$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-16-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3334; ConvF(5.03, 5.03, 5.03); Calibrated: 12/16/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1415; Calibrated: 12/12/2014
Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.71 W/kg

SAR (1 g) = 4.14 W/kg

Deviation = 1.97%

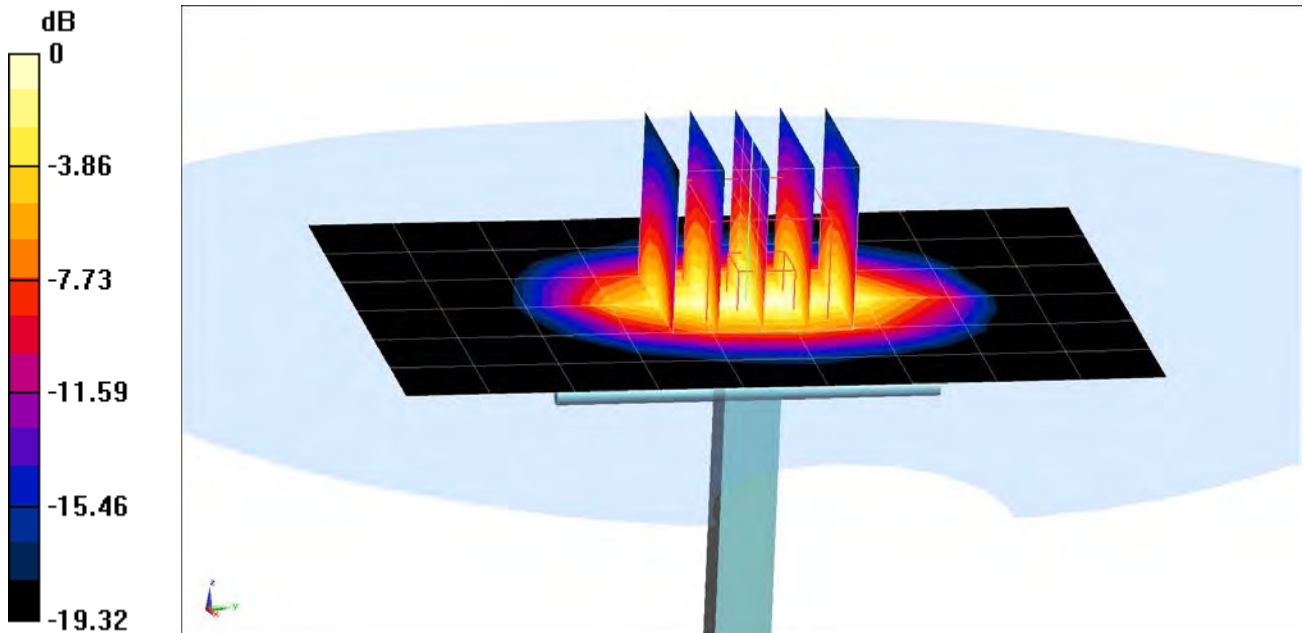

0 dB = 5.27 W/kg = 7.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used:
 $f = 2450 \text{ MHz}$; $\sigma = 1.834 \text{ S/m}$; $\epsilon_r = 39.06$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3332; ConvF(4.49, 4.49, 4.49); Calibrated: 9/18/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 9/17/2014
Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 10.7 W/kg

SAR (1 g) = 4.97 W/kg

Deviation = -4.61%

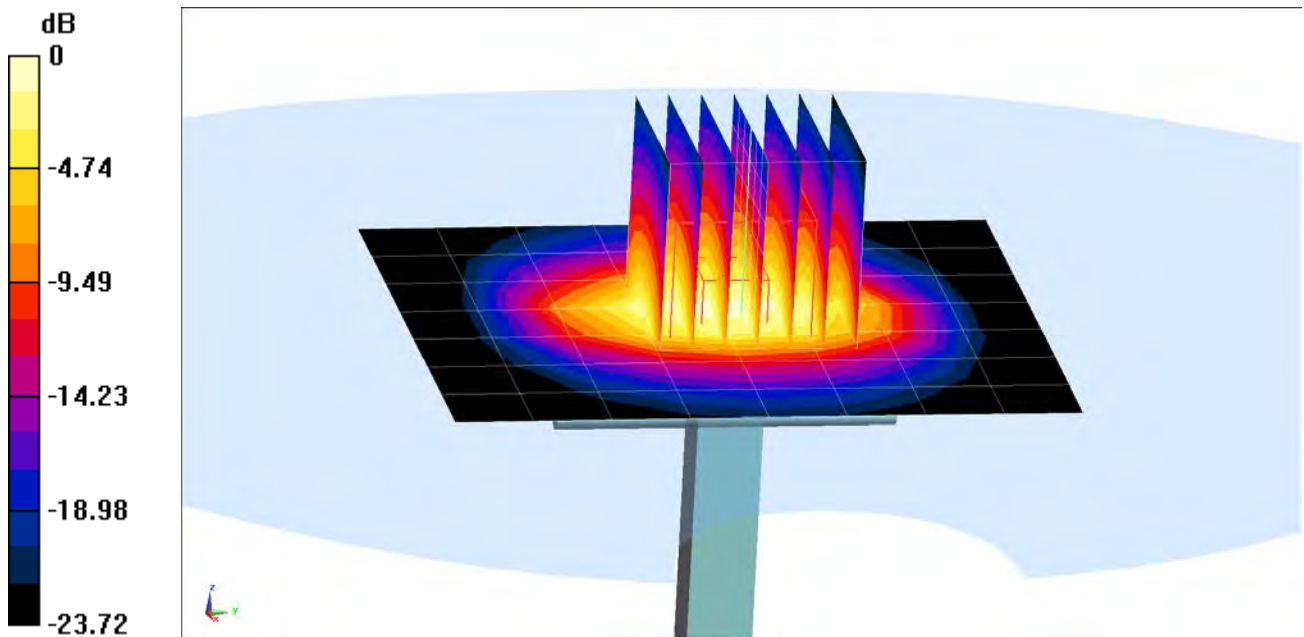

0 dB = 6.51 W/kg = 8.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used (interpolated):
 $f = 750 \text{ MHz}$; $\sigma = 0.978 \text{ S/m}$; $\epsilon_r = 55.012$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-27-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3334; ConvF(6.09, 6.09, 6.09); Calibrated: 12/16/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1415; Calibrated: 12/12/2014
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1158
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.26 W/kg

SAR (1 g) = 0.869 W/kg

Deviation = 4.83%

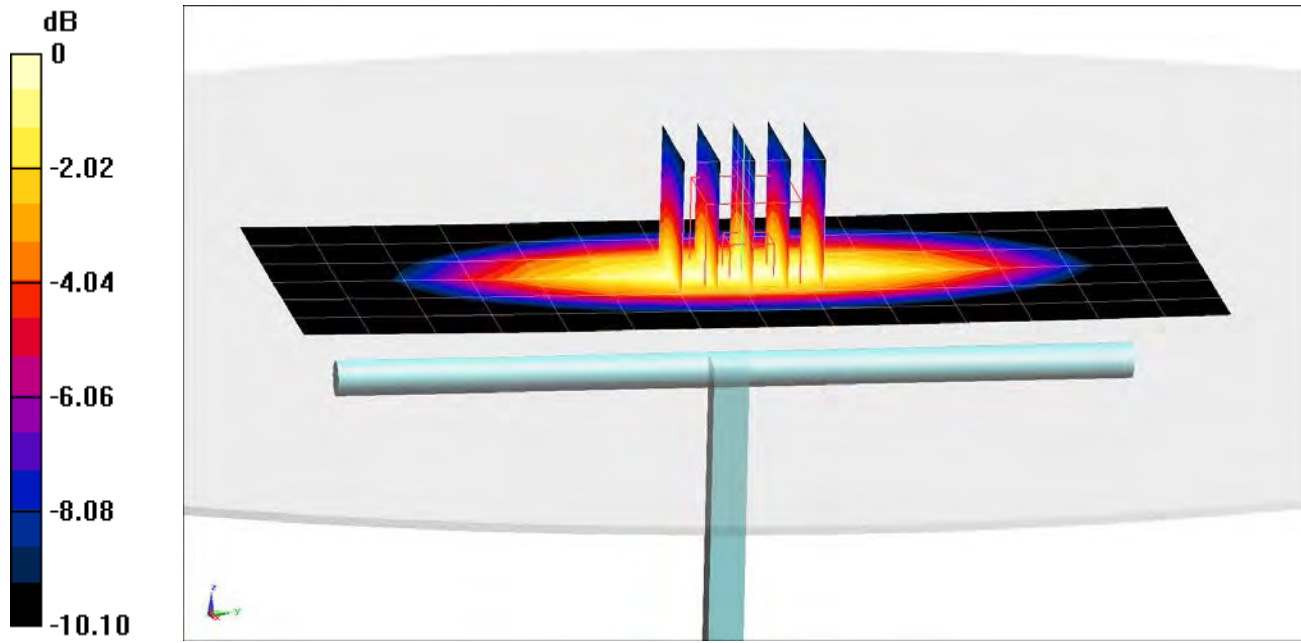

0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133


Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used:
 $f = 835 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 54.32$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-27-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015
Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20 dBm (100 mW)
Peak SAR (extrapolated) = 1.37 W/kg
SAR (1 g) = 0.935 W/kg
Deviation = 0.00%

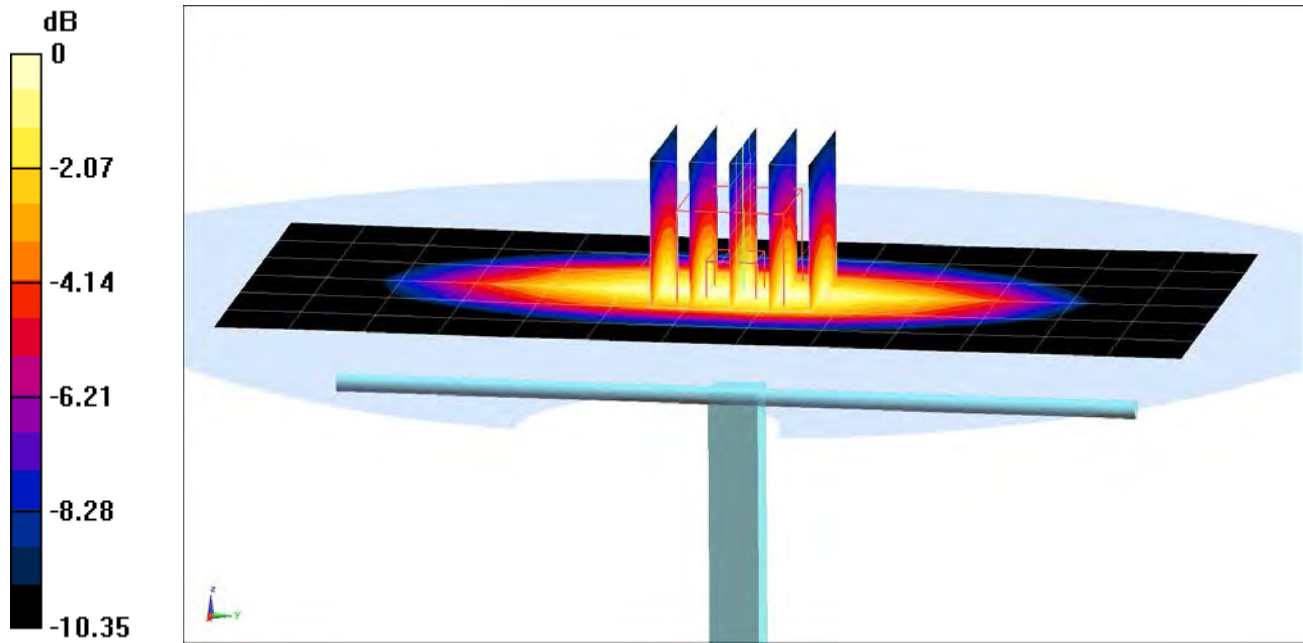

0 dB = 1.13 W/kg = 0.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used:
 $f = 1750 \text{ MHz}$; $\sigma = 1.451 \text{ S/m}$; $\epsilon_r = 52.881$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-27-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(4.95, 4.95, 4.95); Calibrated: 1/23/2015;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.29 W/kg

SAR (1 g) = 3.58 W/kg

Deviation = -4.79%

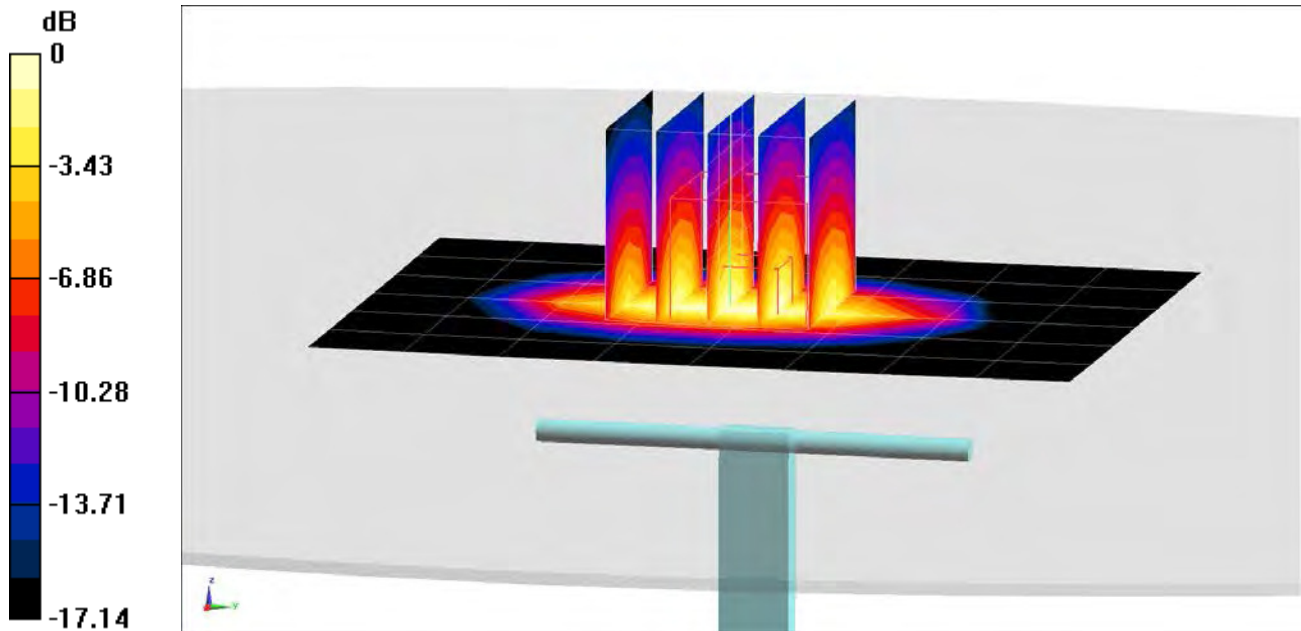

0 dB = 4.42 W/kg = 6.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.56 \text{ S/m}$; $\epsilon_r = 51.365$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-25-2015; Ambient Temp: 21.5°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.66 W/kg

SAR (1 g) = 4.27 W/kg

Deviation = 5.69%

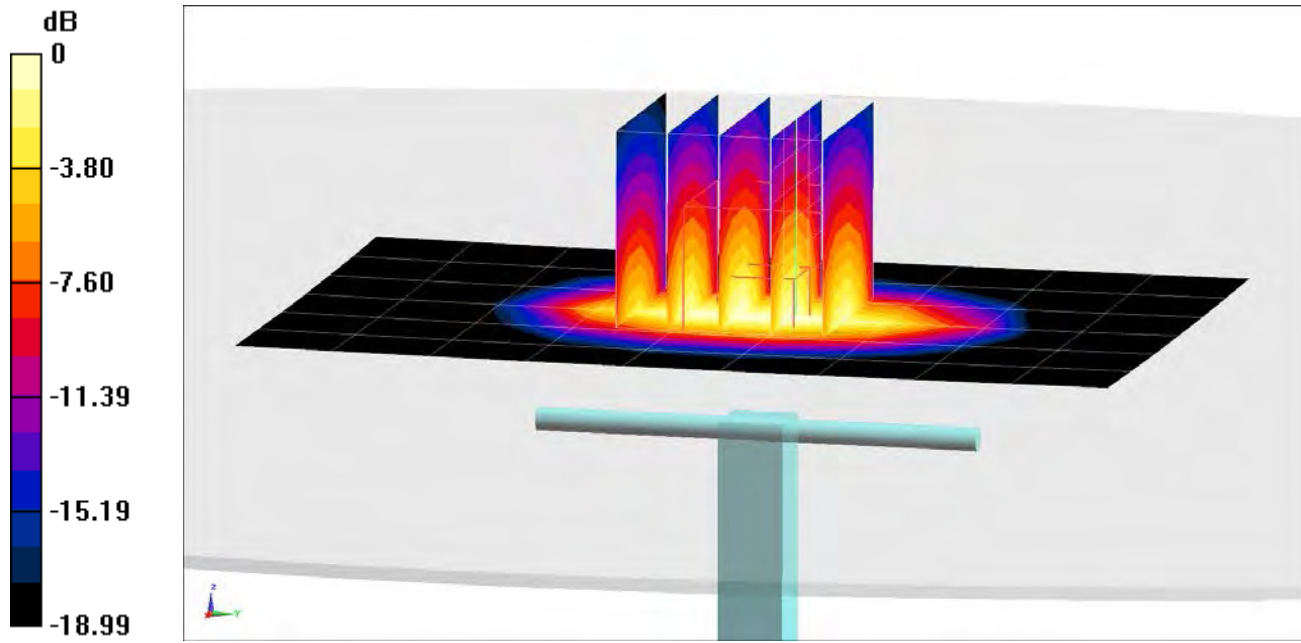

0 dB = 5.03 W/kg = 7.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 882

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used:
 $f = 2450 \text{ MHz}$; $\sigma = 2.011 \text{ S/m}$; $\epsilon_r = 50.356$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-27-2015; Ambient Temp: 21.8°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3331; ConvF(4.29, 4.29, 4.29); Calibrated: 8/20/2014;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 10/31/2014
Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 6.05 W/kg

SAR (1 g) = 2.72 W/kg

Deviation = 7.30%

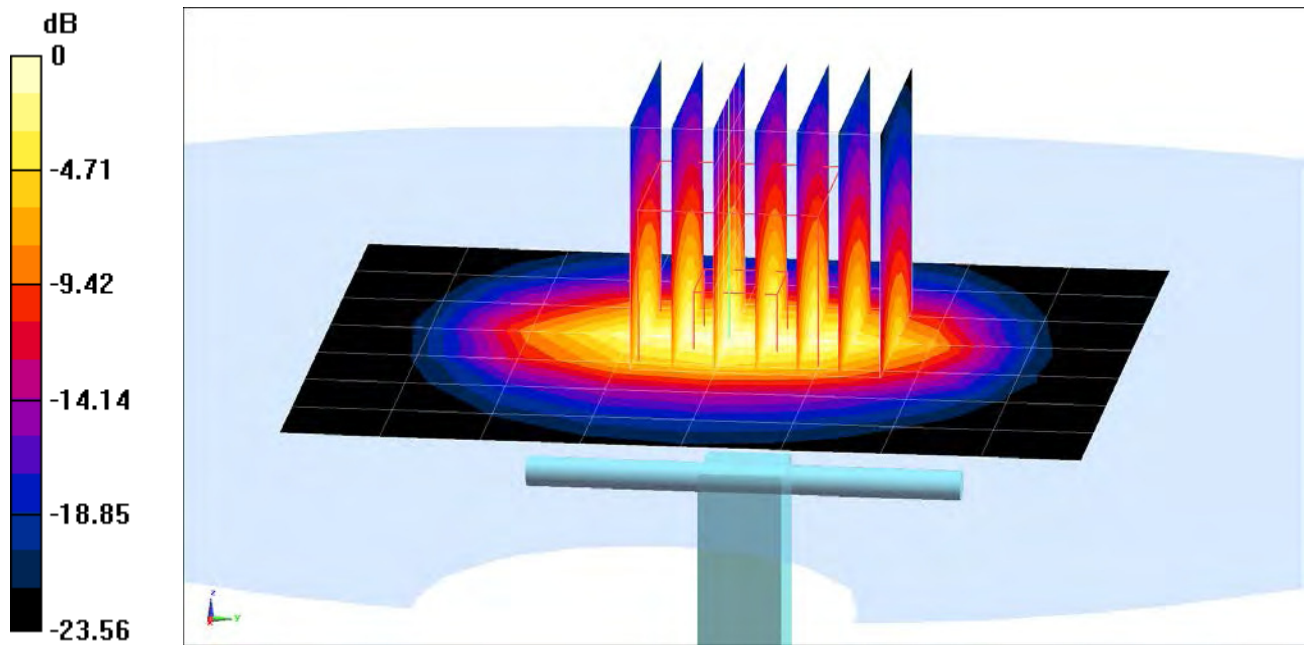

0 dB = 6.55 W/kg = 8.16 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Certificate No: **D750V3-1003_Jan15**

Client **PC Test**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1003**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

CC
2/3/15

Calibration date: **January 16, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | US37292783 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | MY41092317 | 07-Oct-14 (No. 217-02021) | Oct-15 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-14 (No. ES3-3205_Dec14) | Dec-15 |
| DAE4 | SN: 601 | 18-Aug-14 (No. DAE4-601_Aug14) | Aug-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Issued: January 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 750 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.9 | 0.89 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 41.7 \pm 6 % | 0.91 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.06 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 8.09 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.35 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 5.32 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.5 | 0.96 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 56.0 \pm 6 % | 0.99 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.16 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 8.46 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.42 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 5.58 W/kg \pm 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.7 Ω - 1.4 j Ω |
| Return Loss | - 28.5 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.3 Ω - 3.8 j Ω |
| Return Loss | - 27.5 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.043 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|------------------|
| Manufactured by | SPEAG |
| Manufactured on | January 21, 2009 |

DASY5 Validation Report for Head TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.44, 6.44, 6.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.08 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

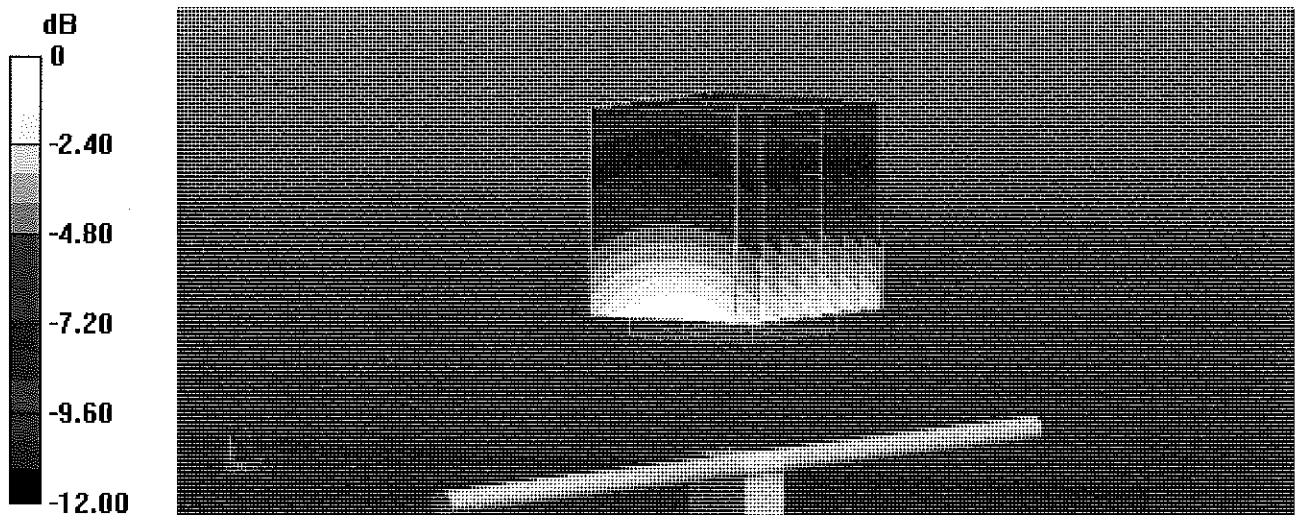

0 dB = 2.41 W/kg = 3.82 dBW/kg

Impedance Measurement Plot for Head TSL


16 Jan 2015 16:07:22
[CH1] S11 1 U FS 1: 53.666 Ω -1.3730 Δ 154.55 pF 750.000 000 MHz

*
Del

CA

Avg
16

H1d

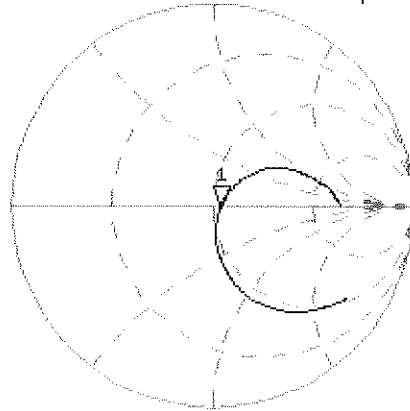


CH2 S11 LOG 5 dB/REF -20 dB 1:-28.456 dB 750.000 000 MHz

CA

Avg
16

H1d

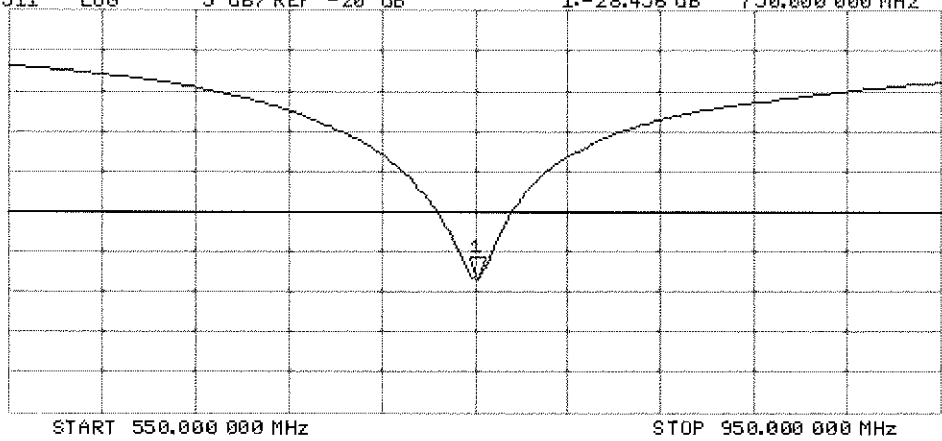

DASY5 Validation Report for Body TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.21, 6.21, 6.21); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.21 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

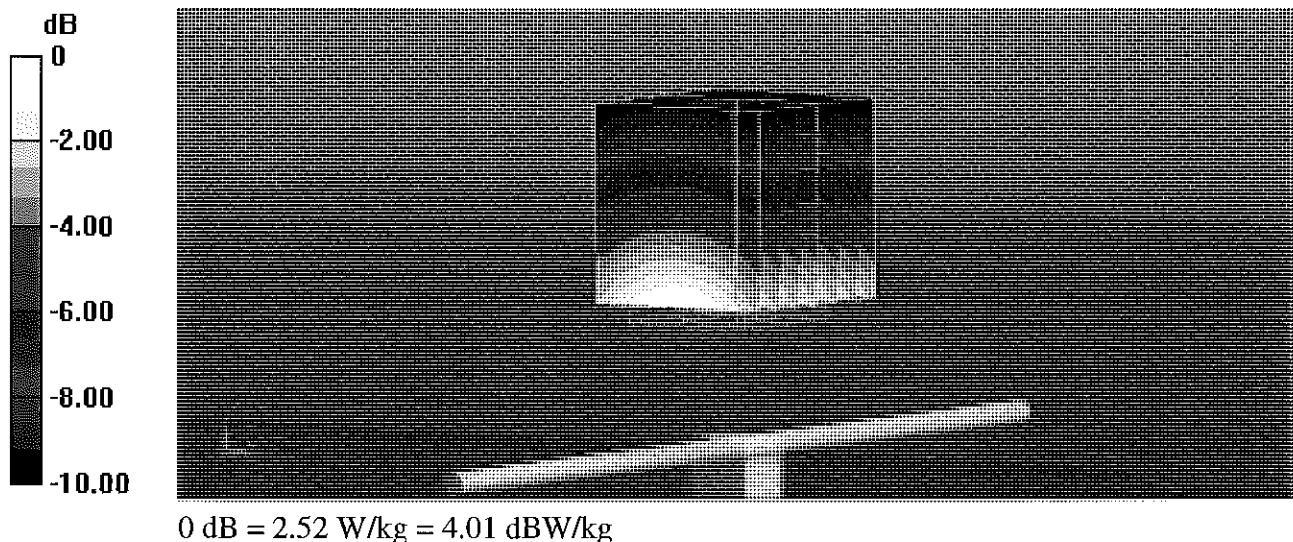


Impedance Measurement Plot for Body TSL

16 Jan 2015 13:37:35

[CH1] S11 1 U FS 1: 48.268 Ω -3.7676 Ω 56.324 pF 750.000 000 MHz

*
De1
CA

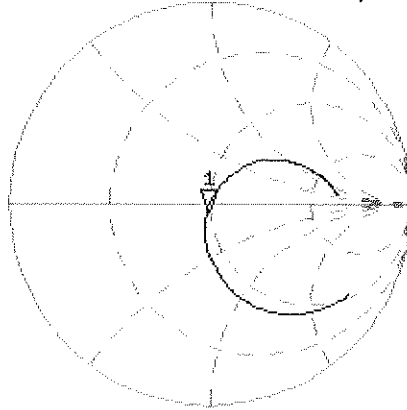

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.498 dB 750.000 000 MHz

CA

Avg
16

H1d

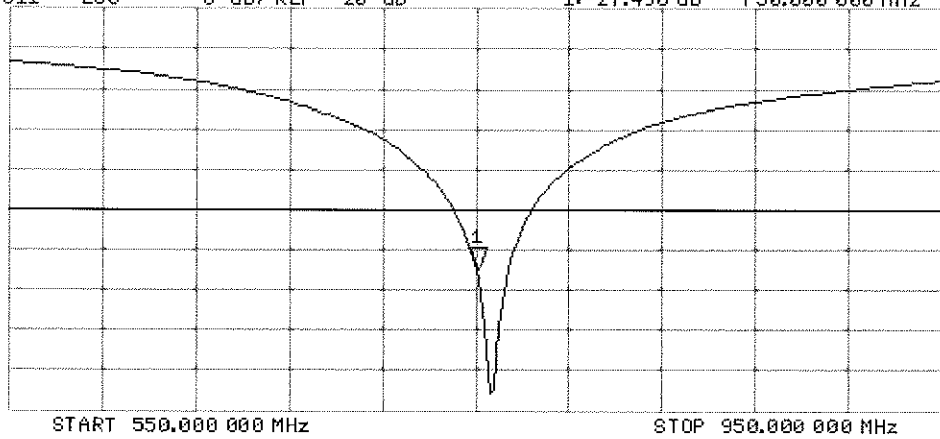

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d133_Jul14**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d133**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

CC
W/G/M

Calibration date: **July 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | US37292783 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | MY41092317 | 09-Oct-13 (No. 217-01828) | Oct-14 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-13 (No. ES3-3205_Dec13) | Dec-14 |
| DAE4 | SN: 601 | 30-Apr-14 (No. DAE4-601_Apr14) | Apr-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8763E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Jeton Kastrali** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: July 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 41.1 ± 6 % | 0.94 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 2.38 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.20 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 1.53 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 5.96 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 53.8 ± 6 % | 1.02 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 2.44 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.35 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 1.59 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.15 W/kg ± 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 51.6 Ω - 1.0 $j\Omega$ |
| Return Loss | - 34.7 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 47.8 Ω - 3.3 $j\Omega$ |
| Return Loss | - 27.8 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.395 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 22, 2011 |

DASY5 Validation Report for Head TSL

Date: 24.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.79 W/kg

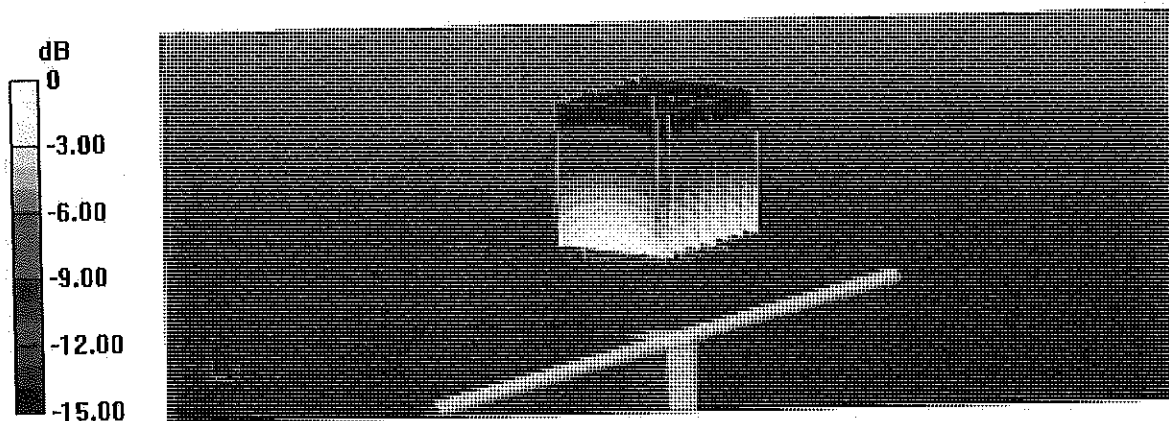

Impedance Measurement Plot for Head TSL

24 Jul 2014 11:33:11

[CHI] S11 1 U FS



Z: 51.553 Ω -1.0293 Ω 105.19 pF 835.000 000 MHz

De1

CA

Avg
16

H1d

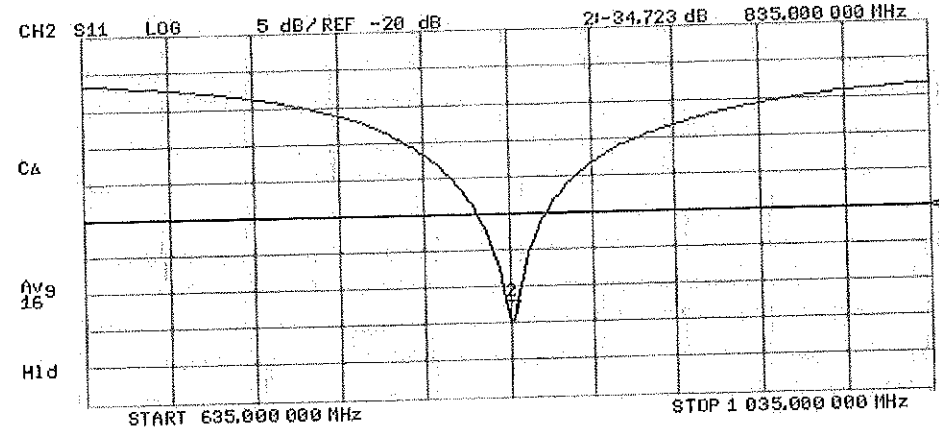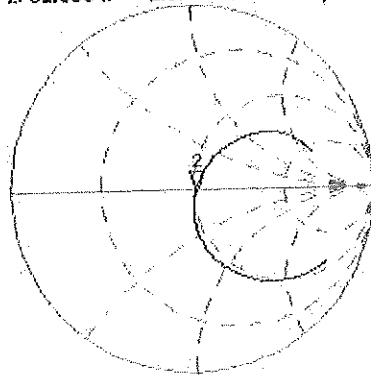

DASY5 Validation Report for Body TSL

Date: 17.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133


Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: $f = 835$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.61 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.59 W/kg
SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg
Maximum value of SAR (measured) = 2.84 W/kg

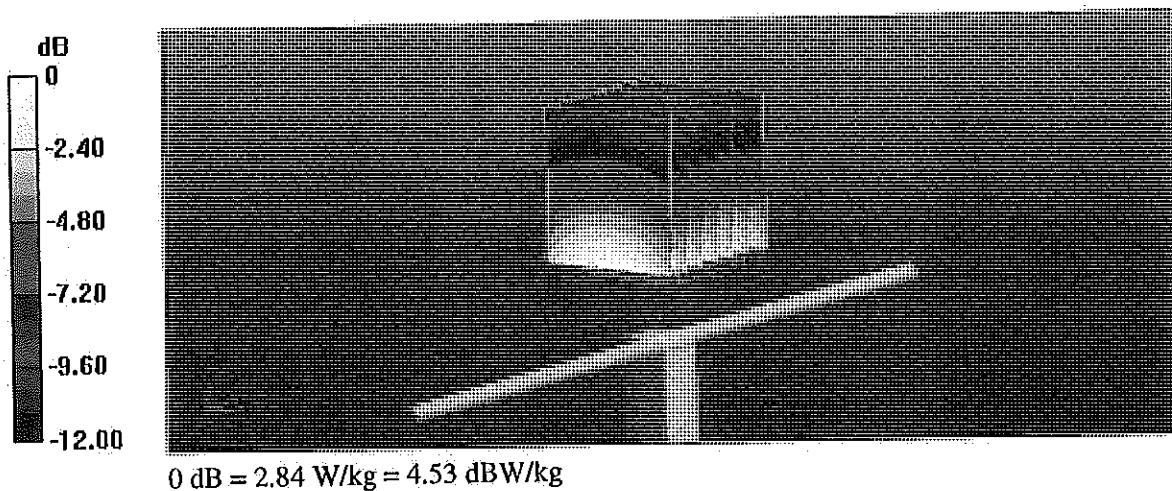

Impedance Measurement Plot for Body TSL


17 Jul 2014 13:43:24

CH1 S11 1 U F8

1: 47.799 Ω -3.3184 Ω 57.439 pF


835.000 000 MHz

*
Del
CA

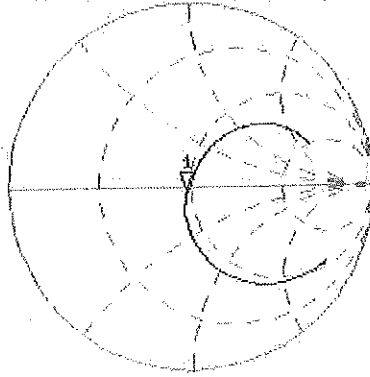

Avg
16

H1d

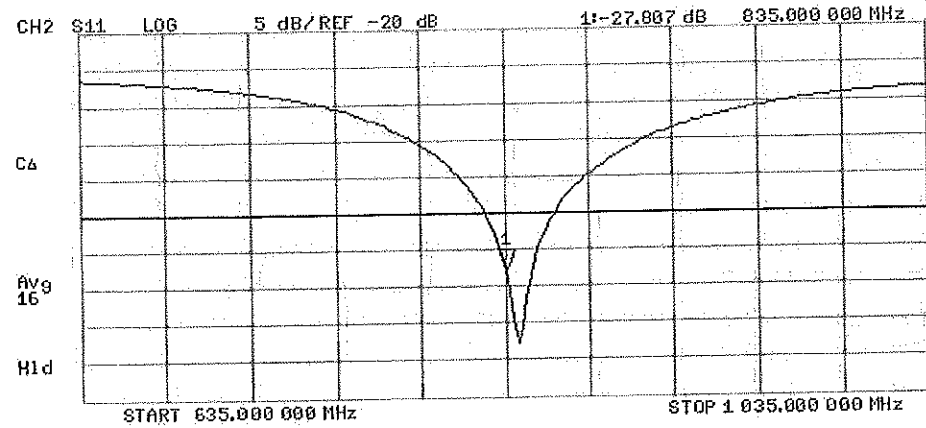



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1765V2-1008_May14**

CALIBRATION CERTIFICATE

Object **D1765V2 - SN: 1008**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

*CCV
6/2/14*

Calibration date: **May 07, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | US37292783 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | MY41092317 | 09-Oct-13 (No. 217-01828) | Oct-14 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-13 (No. ES3-3205_Dec13) | Dec-14 |
| DAE4 | SN: 601 | 30-Apr-14 (No. DAE4-601_Apr14) | Apr-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Jeton Kastrati** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: May 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1750 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.1 | 1.37 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.0 \pm 6 % | 1.36 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 9.23 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 36.9 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 4.87 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 19.5 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.4 | 1.49 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 52.2 \pm 6 % | 1.48 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 9.41 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 37.6 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.02 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 20.1 W/kg \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.7 Ω - 6.1 j Ω |
| Return Loss | - 23.6 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 43.7 Ω - 6.4 j Ω |
| Return Loss | - 20.4 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.211 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|------------------|
| Manufactured by | SPEAG |
| Manufactured on | October 06, 2005 |

DASY5 Validation Report for Head TSL

Date: 07.05.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.23, 5.23, 5.23); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.06 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.23 W/kg; SAR(10 g) = 4.87 W/kg

Maximum value of SAR (measured) = 11.7 W/kg

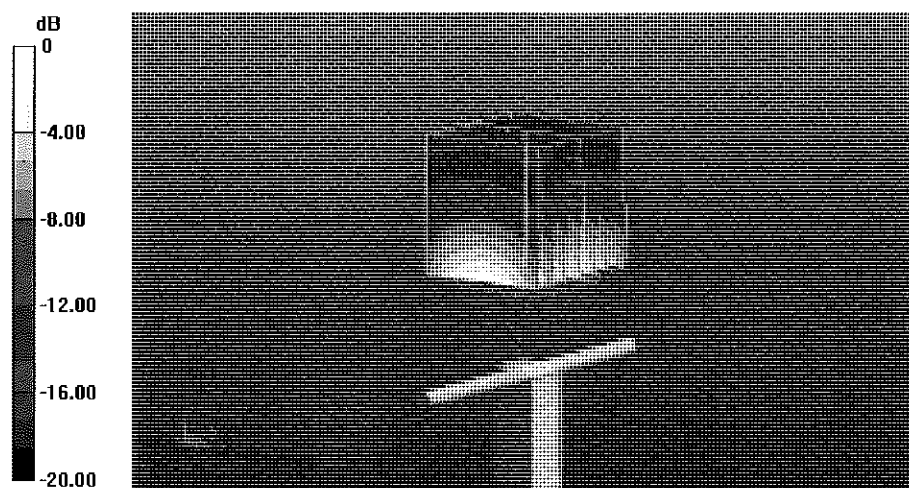

0 dB = 11.7 W/kg = 10.68 dBW/kg

Impedance Measurement Plot for Head TSL

7 May 2014 09:22:35


CH1 S11 1 U FS 1: 47.709 Ω -6.0566 Ω 15.016 pF 1 750.000 000 MHz

*
De1

CΔ

Avg
16

H1 d

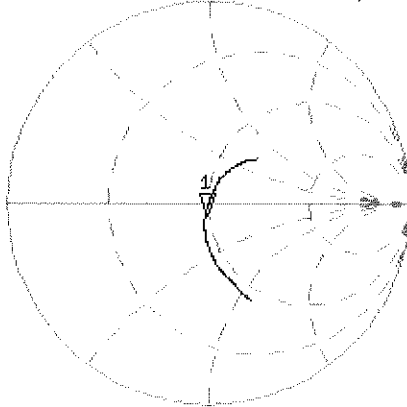


CH2 S11 LOG 5 dB/REF -20 dB 1:-23.588 dB 1 750.000 000 MHz

CΔ

Avg
16

H1 d

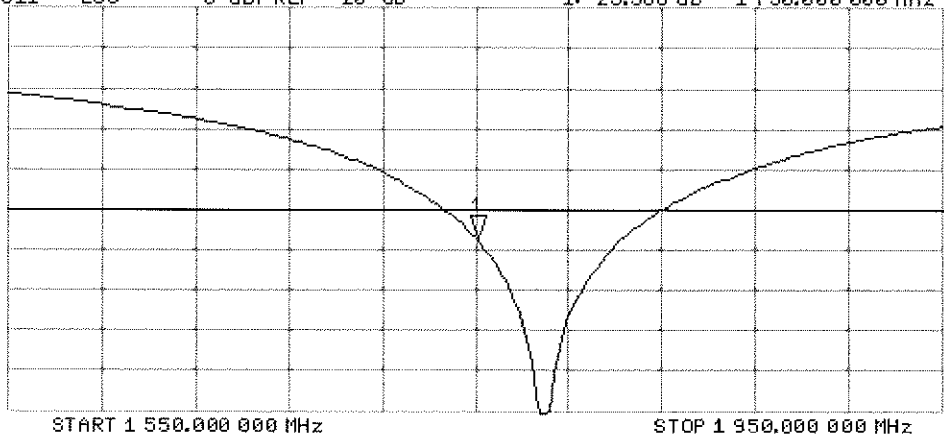

DASY5 Validation Report for Body TSL

Date: 07.05.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.89, 4.89, 4.89); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.01 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.41 W/kg; SAR(10 g) = 5.02 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

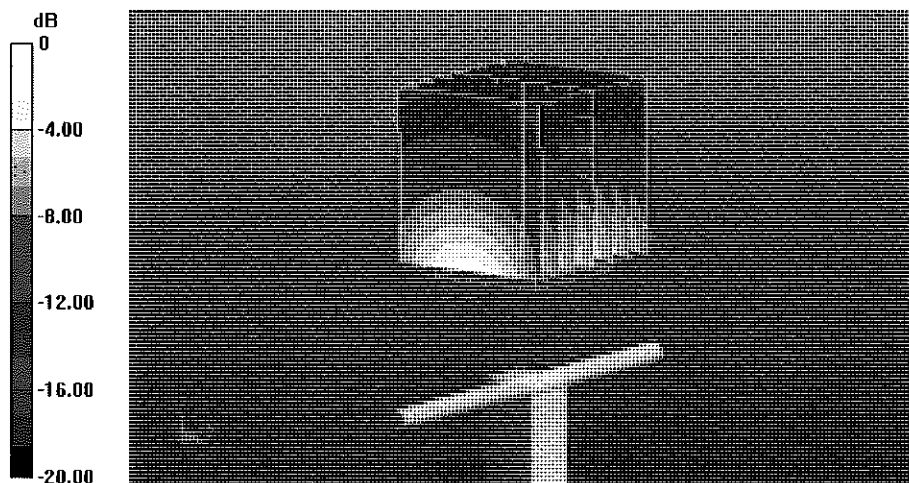


0 dB = 11.8 W/kg = 10.72 dBW/kg

Impedance Measurement Plot for Body TSL

7 May 2014 09:21:55


CH1 S11 1 U FS 1: 43.727 Ω -5.3691 Ω 14.279 pF 1 750.000 000 MHz

*
De1
CA
Avg
16
H1d

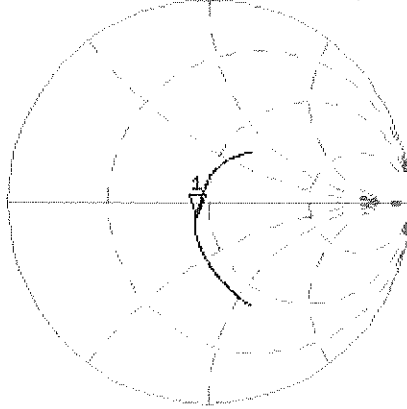

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.428 dB 1 750.000 000 MHz

CA
Avg
16
H1d

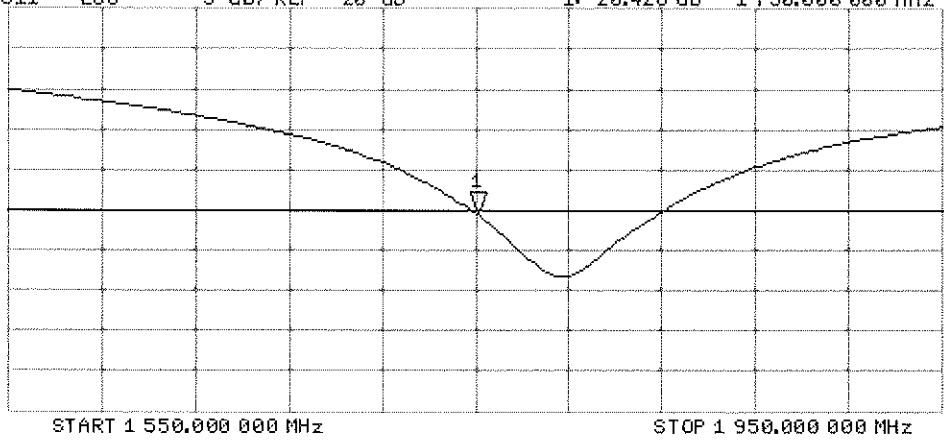



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d148_Feb15**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d148**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

CC ✓
3/6/15

Calibration date: **February 18, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | US37292783 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | MY41092317 | 07-Oct-14 (No. 217-02021) | Oct-15 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-14 (No. ES3-3205_Dec14) | Dec-15 |
| DAE4 | SN: 601 | 18-Aug-14 (No. DAE4-601_Aug14) | Aug-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature:

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature:

Issued: February 18, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.1 \pm 6 % | 1.42 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 10.3 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 40.6 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.37 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 21.3 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 53.1 \pm 6 % | 1.53 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 10.1 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 40.2 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.40 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 21.5 W/kg \pm 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.4 Ω + 6.2 j Ω |
| Return Loss | - 23.8 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.2 Ω + 6.6 j Ω |
| Return Loss | - 23.1 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.198 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|----------------|
| Manufactured by | SPEAG |
| Manufactured on | March 11, 2011 |

DASY5 Validation Report for Head TSL

Date: 18.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5, 5, 5); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.30 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.37 W/kg

Maximum value of SAR (measured) = 13.0 W/kg

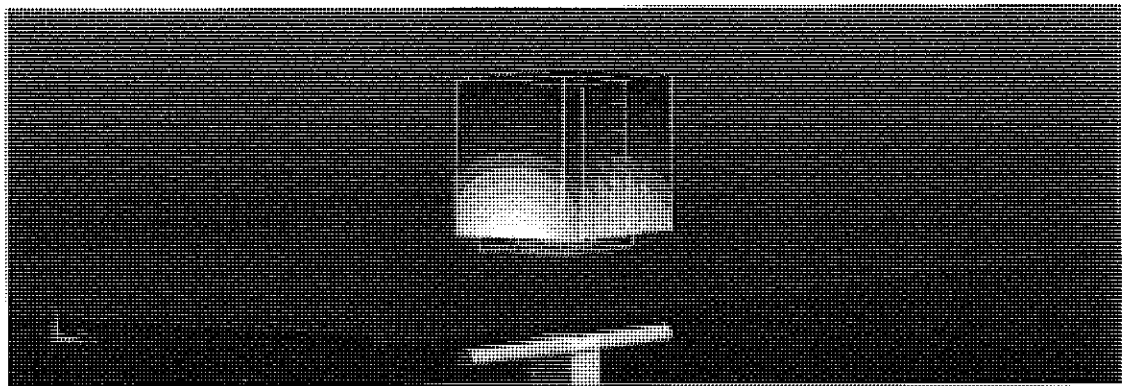

0 dB = 13.0 W/kg = 11.14 dBW/kg

Impedance Measurement Plot for Head TSL

18 Feb 2015 13:12:24

CH1 S11 1 U FS

1: 52.393 Ω 6.1895 Ω 518.46 μH


1 900.000 000 MHz

*
De1

CA

Avg
16

H1 d

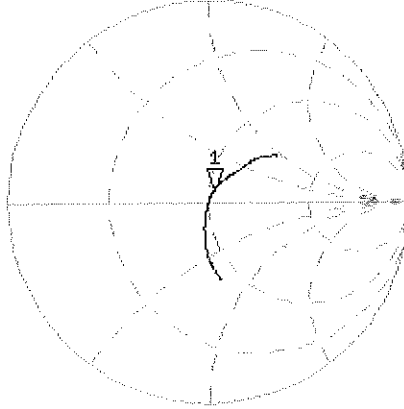

CH2 S11 LOG


5 dB/REF -20 dB

1: -23.774 dB 1 900.000 000 MHz

CA

Avg
16

H1 d

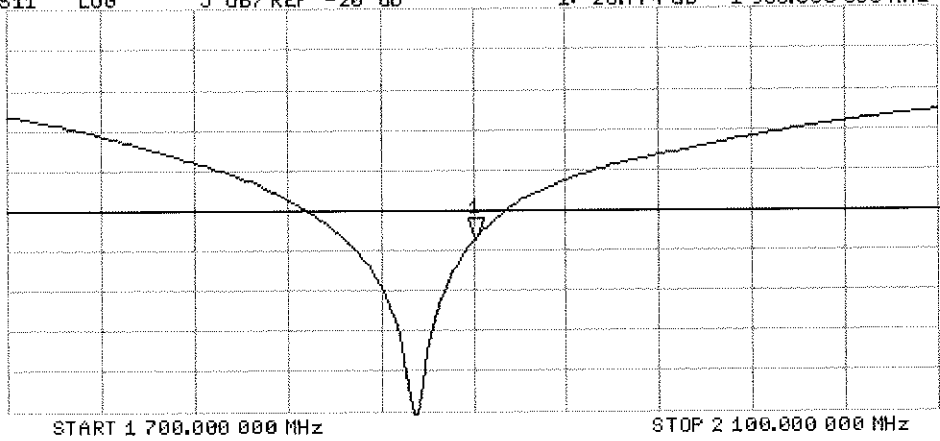


Impedance Measurement Plot for Body TSL

18 Feb 2015 13:11:53


CH1 S11 1 U FS 1: 48.238 Ω 6.6348 Ω 555.77 pF 1 900.000 000 MHz

*
De l
CA
Avg
16
H1 d

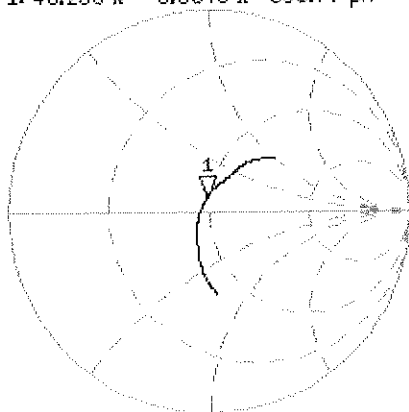

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.131 dB 1 900.000 000 MHz

CA
Avg
16
H1 d

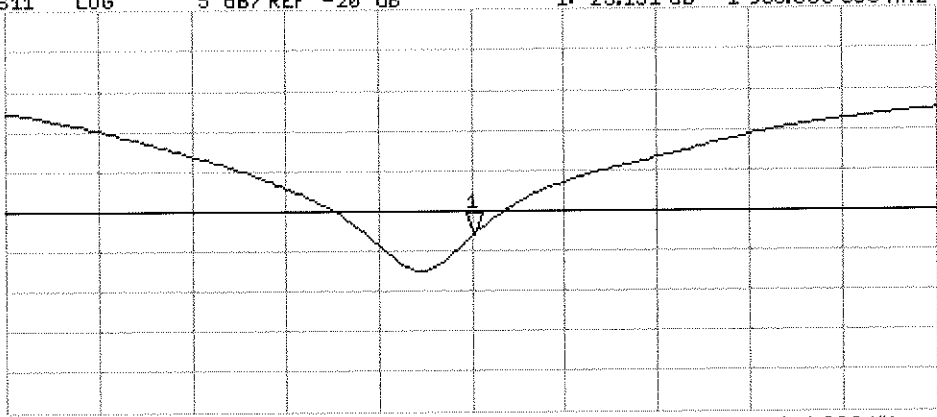

START 1 700.000 000 MHz STOP 2 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 18.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.4 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

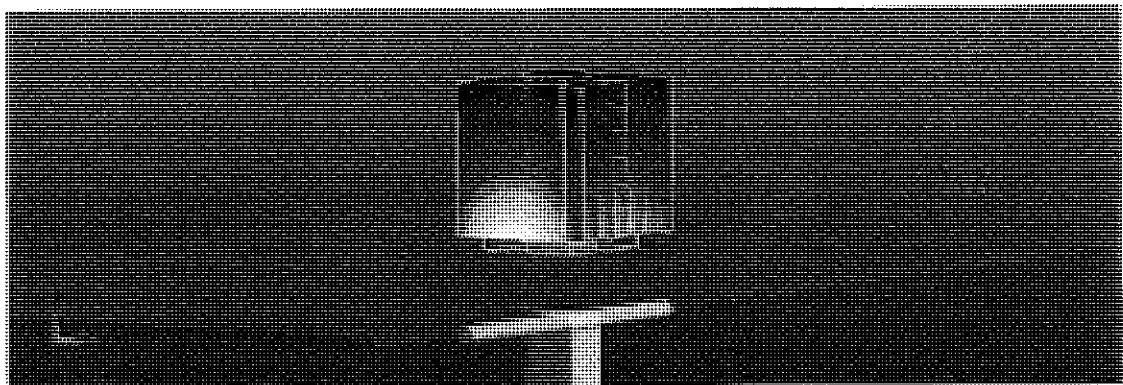

0 dB = 12.7 W/kg = 11.04 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-719_Aug14**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 719**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 11, 2014**

✓
KOK
9/8/14

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | US37292783 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | MY41092317 | 09-Oct-13 (No. 217-01828) | Oct-14 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-13 (No. ES3-3205_Dec13) | Dec-14 |
| DAE4 | SN: 601 | 30-Apr-14 (No. DAE4-601_Apr14) | Apr-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Michael Weber** Function: **Laboratory Technician** Signature: *M. Weber*

Approved by: **Katja Pokovic** Technical Manager *[Signature]*

Issued: August 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 38.0 \pm 6 % | 1.82 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 13.2 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 52.1 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 6.09 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 24.2 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 50.5 \pm 6 % | 2.02 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 13.3 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 51.8 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 6.10 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 24.0 W/kg \pm 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.9 Ω + 3.0 j Ω |
| Return Loss | - 25.2 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.9 Ω + 5.8 j Ω |
| Return Loss | - 24.7 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.149 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|--------------------|
| Manufactured by | SPEAG |
| Manufactured on | September 10, 2002 |

DASY5 Validation Report for Head TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.09 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

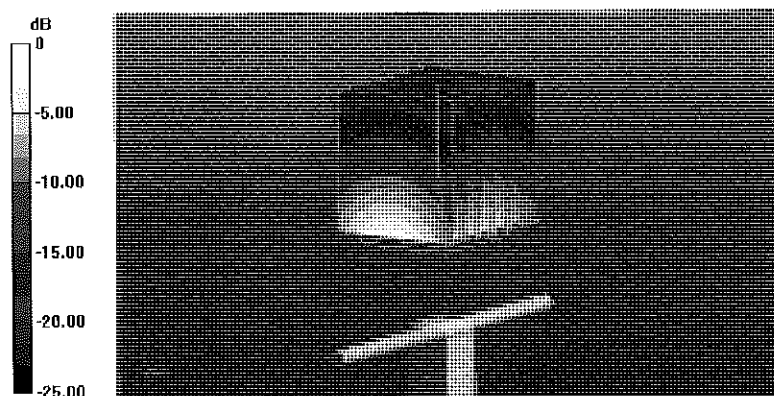


0 dB = 17.4 W/kg = 12.41 dBW/kg

Impedance Measurement Plot for Head TSL


11 Aug 2014 11:49:06
[CH1] S11 1 U FS 1: 54.887 Ω 3.0391 Ω 197.42 pF 2 450.000 000 MHz

*
Del
C Δ
Avg
16
H1 d

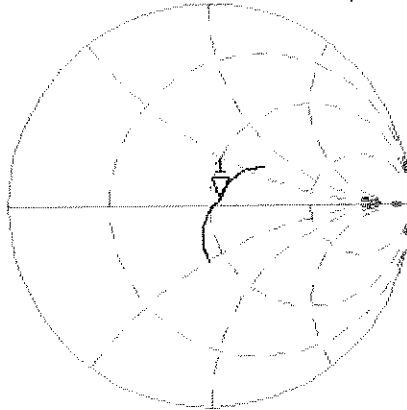

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.212 dB 2 450.000 000 MHz

C Δ
Avg
16
H1 d

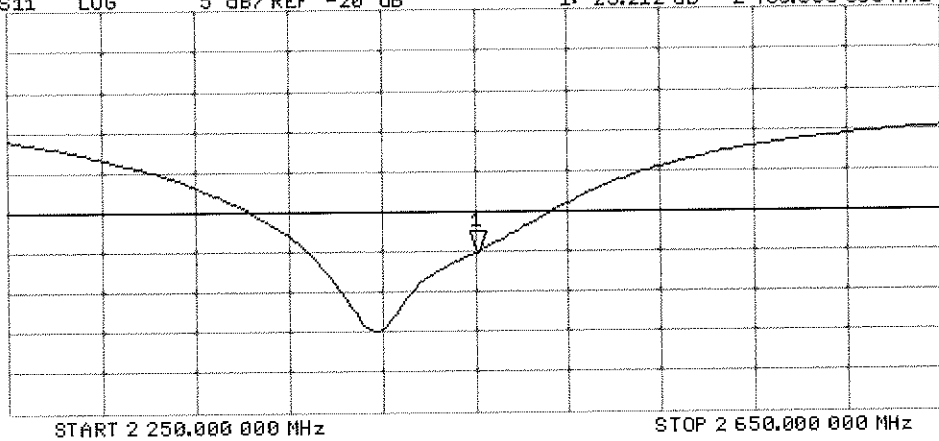

DASY5 Validation Report for Body TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.08 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.1 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

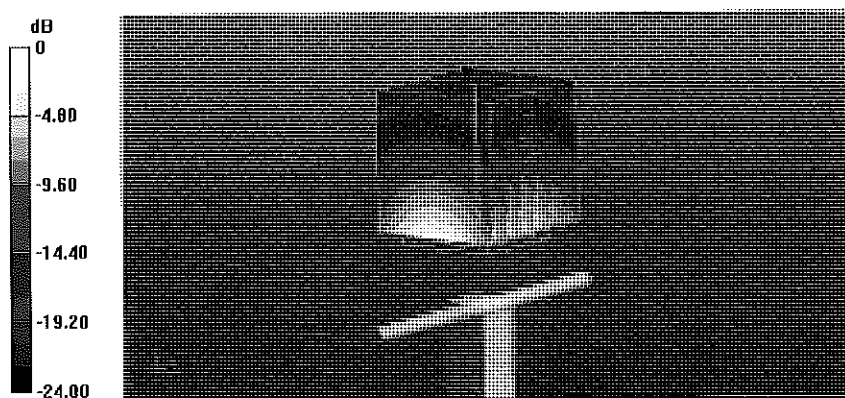

0 dB = 17.6 W/kg = 12.46 dBW/kg

Impedance Measurement Plot for Body TSL

11 Aug 2014 11:48:32


[CHI] S11 1 U FS 1: 50.928 Δ 5.8223 Δ 378.22 pF 2 450.000 000 MHz

*
De 1

CA

Avg
15

H1 d

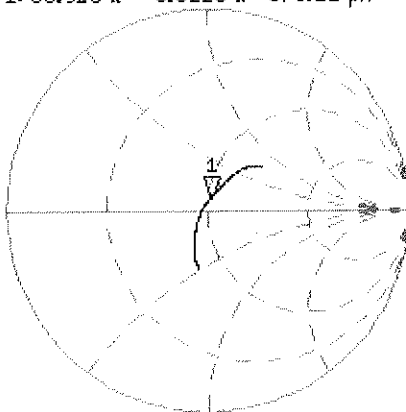


CH2 S11 LOG 5 dB/REF -20 dB 1:-24.679 dB 2 450.000 000 MHz

CA

Avg
15

H1 d

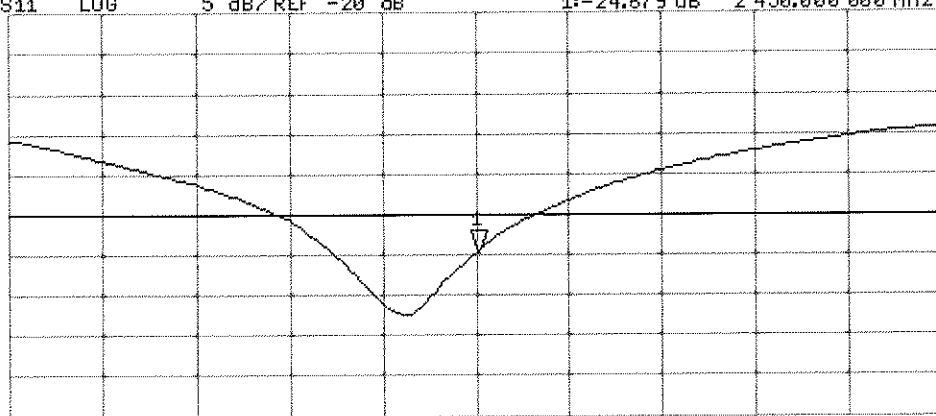

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1046_Feb15**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1046**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **February 19, 2015**

*BN ✓
3/6/2015*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | US37292783 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | MY41092317 | 07-Oct-14 (No. 217-02021) | Oct-15 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-14 (No. ES3-3205_Dec14) | Dec-15 |
| DAE4 | SN: 601 | 18-Aug-14 (No. DAE4-601_Aug14) | Aug-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Jeton Kastrati** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: February 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 750 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.9 | 0.89 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 41.6 ± 6 % | 0.90 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 2.03 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 8.04 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 1.33 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 5.28 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.5 | 0.96 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 53.9 ± 6 % | 0.98 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 2.12 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 8.29 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 1.39 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 5.47 W/kg ± 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 55.8 Ω + 1.5 j Ω |
| Return Loss | - 24.9 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.4 Ω - 1.3 j Ω |
| Return Loss | - 34.5 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.038 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|--------------------|
| Manufactured by | SPEAG |
| Manufactured on | September 02, 2011 |

DASY5 Validation Report for Head TSL

Date: 18.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1046

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.44, 6.44, 6.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=15$ mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.99 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

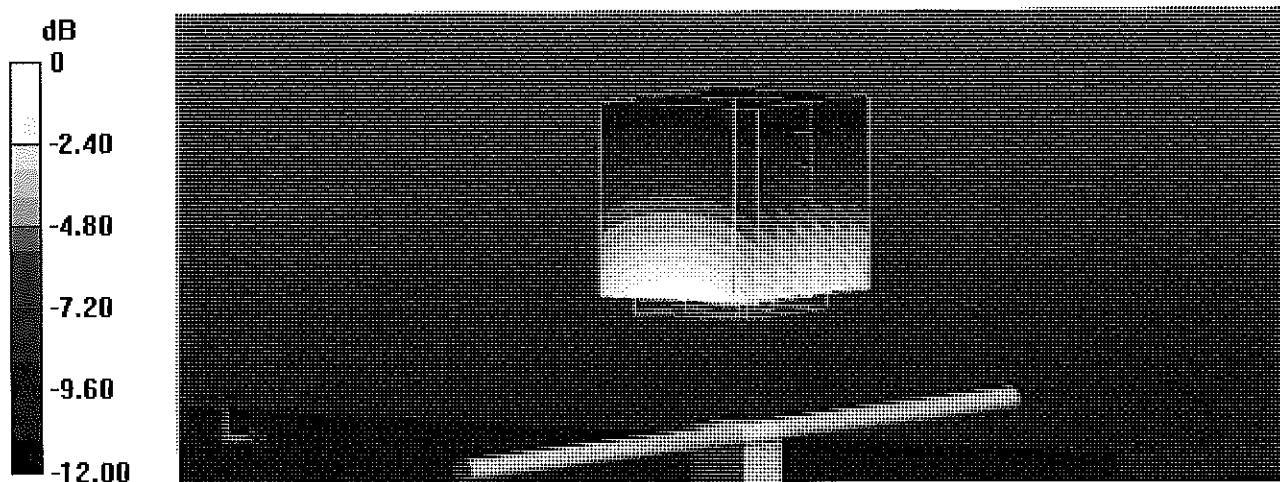

0 dB = 2.37 W/kg = 3.75 dBW/kg

Impedance Measurement Plot for Head TSL

18 Feb 2015 17:03:54

CH1 S11 1 U FS

1: 55.801 Ω 1.5195 μ 322.45 pF


750.000 000 MHz

*
De1

Cor

Avg
16

H1d

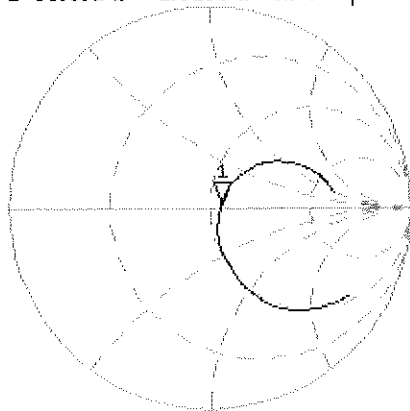

CH2 S11

LOG

5 dB/REF -20 dB


1: -24.935 dB

750.000 000 MHz

Cor

Avg
16

H1d

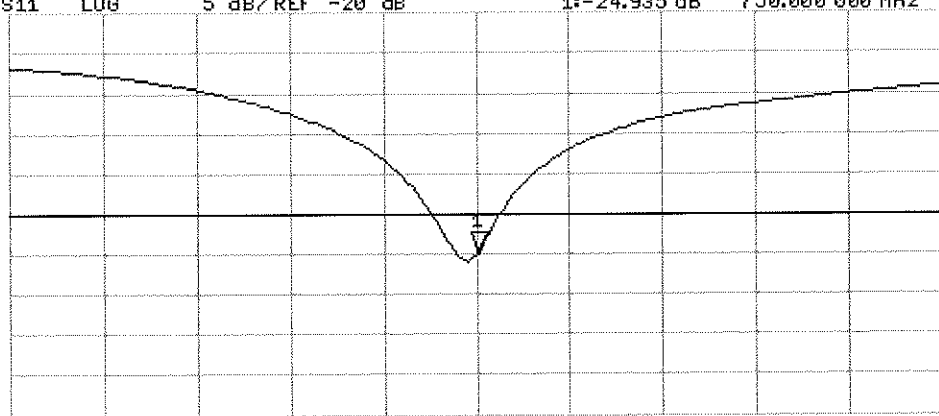

START 550.000 000 MHz

STOP 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 19.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1046

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.21, 6.21, 6.21); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/ $P_{in}=250 \text{ mW}$, $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:



Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.00 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 2.12 W/kg ; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.46 W/kg

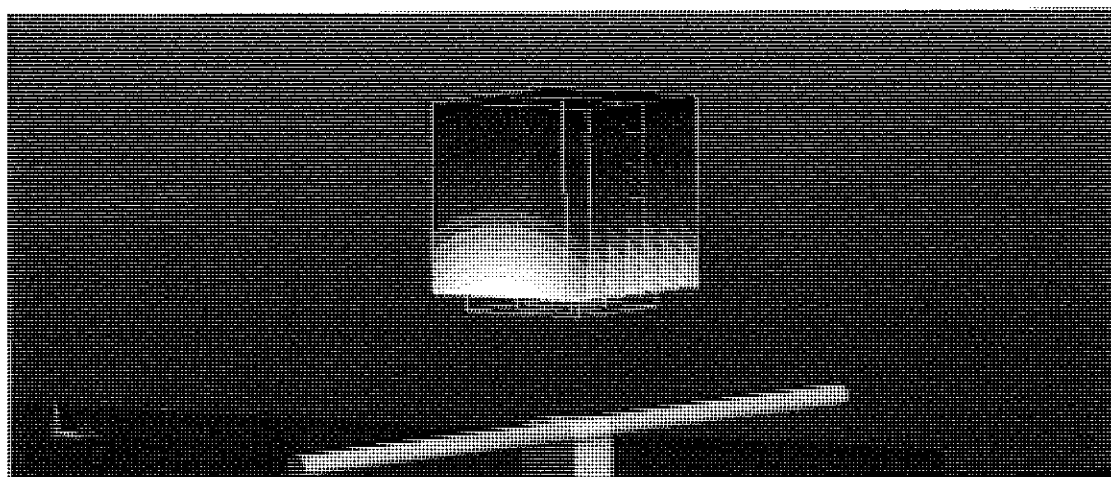

0 dB = $2.46 \text{ W/kg} = 3.91 \text{ dBW/kg}$

Impedance Measurement Plot for Body TSL

19 Feb 2015 09:09:32

CH1 S11 1 U FS

1: 51.357 Ω -1.2813 Ω 165.62 μ F


750.000 000 MHz

*
De1

CA

Avg
16

H1d

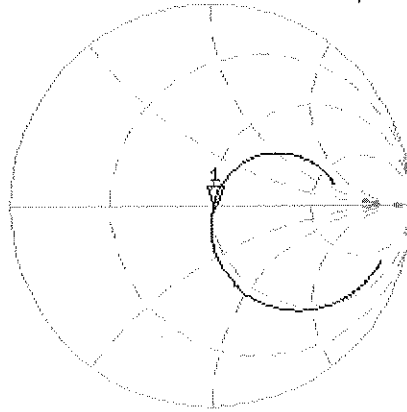


CH2 S11 LOG 5 dB/REF -20 dB 1: -34.515 dB 750.000 000 MHz

CA

Avg
16

H1d

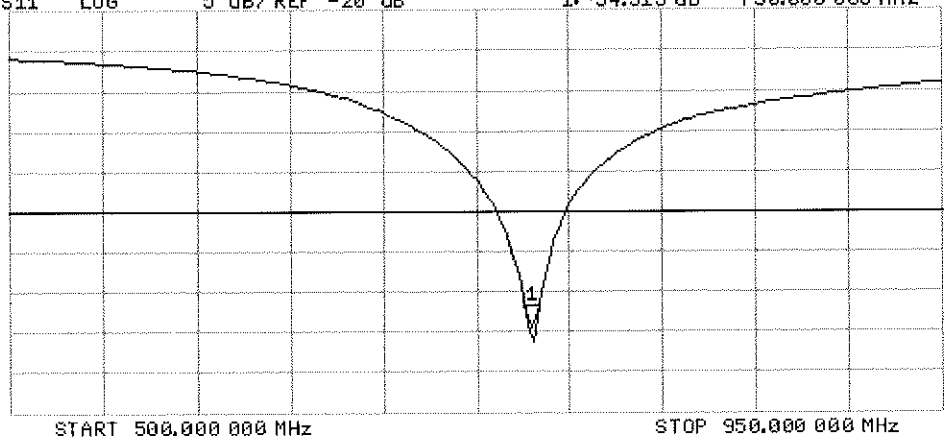

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1900V2-5d149_Jul14**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d149**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

CC
11/5/14

Calibration date: **July 23, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | US37292783 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | MY41092317 | 09-Oct-13 (No. 217-01828) | Oct-14 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-13 (No. ES3-3205_Dec13) | Dec-14 |
| DAE4 | SN: 601 | 30-Apr-14 (No. DAE4-601_Apr14) | Apr-15 |
| Secondary Standards | ID # | Check Date (In house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | in house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | in house check: Oct-14 |

| | | | |
|----------------|-------------------------------|--|---------------|
| Calibrated by: | Name Jeton Kastrati | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Technical Manager | |

Issued: July 23, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 39.5 ± 6 % | 1.38 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 10.0 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 40.2 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 5.24 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 21.0 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 52.5 ± 6 % | 1.51 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 10.1 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 40.4 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 5.33 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 21.3 W/kg ± 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.6 Ω + 5.5 j Ω |
| Return Loss | - 24.6 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.8 Ω + 6.1 j Ω |
| Return Loss | - 24.0 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.197 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|----------------|
| Manufactured by | SPEAG |
| Manufactured on | March 11, 2011 |

DASY5 Validation Report for Head TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.06, 5.06, 5.06); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 100I
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

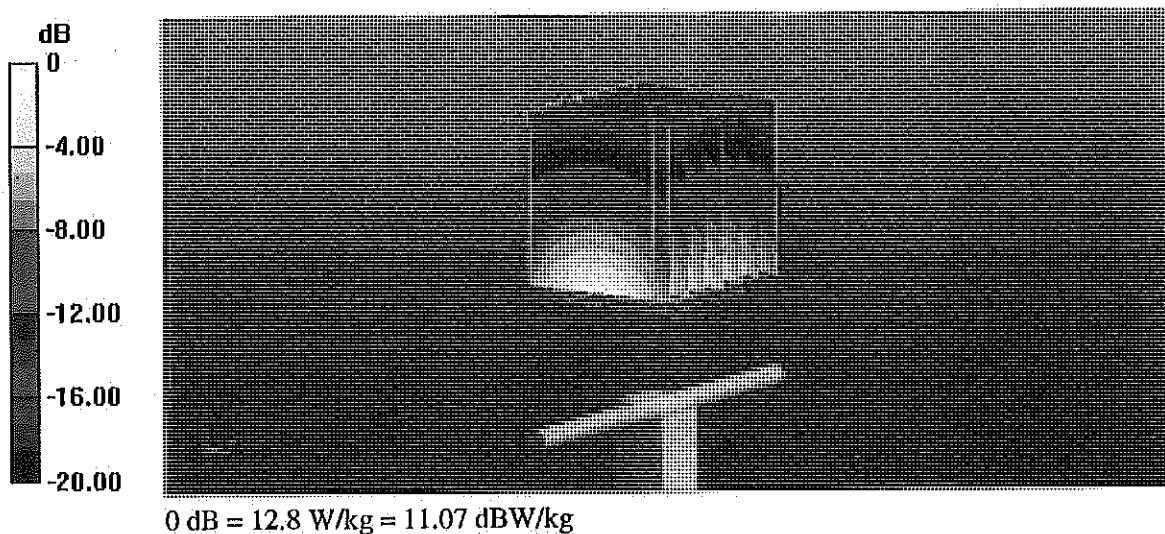


Impedance Measurement Plot for Head TSL

23 Jul 2014 10:46:05

CH1 S11 1 U FS 1: 52.600 Ω 5.4570 Ω 457.11 pF 1 900.000 000 MHz

*
Del
Cor

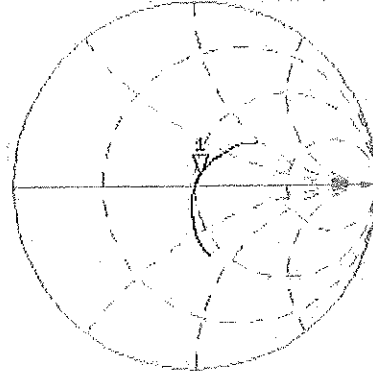

avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.600 dB 1 900.000 000 MHz

Cor

avg
16

H1d

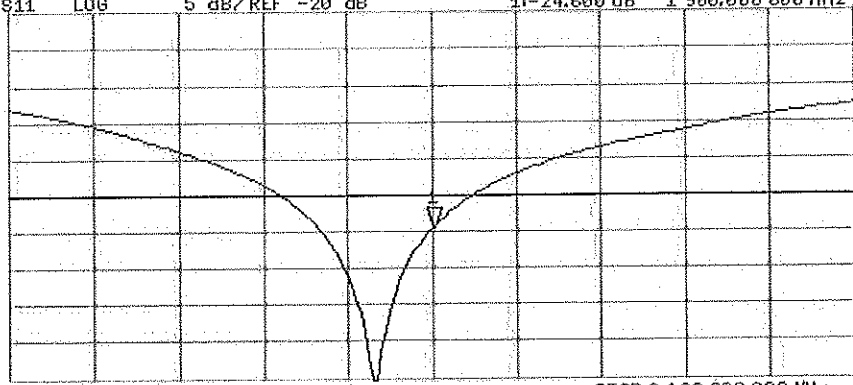

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.33 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

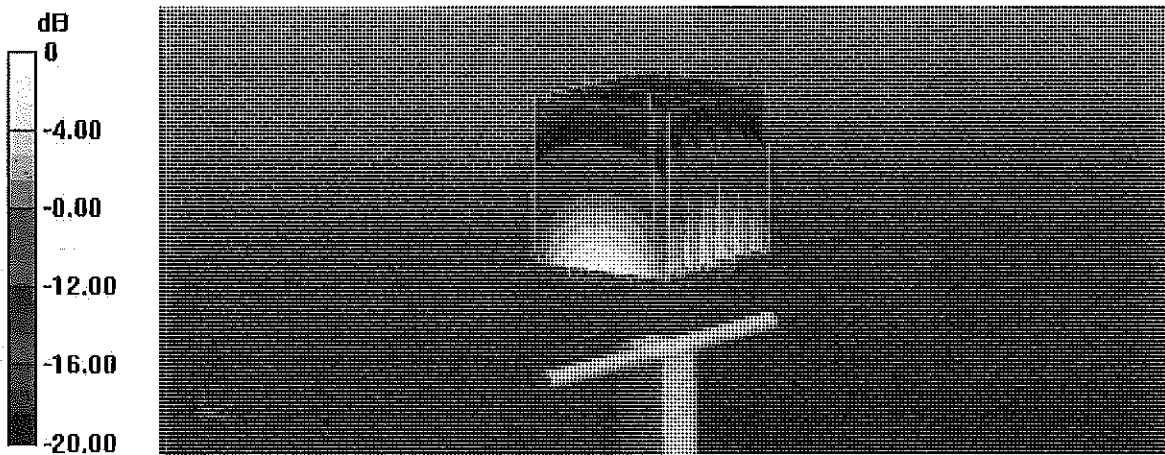


0 dB = 12.8 W/kg = 11.07 dBW/kg

Impedance Measurement Plot for Body TSL

23 Jul 2014 10:45:45

CH1 S11 1 U FS 1: 48.789 Ω 6.1426 Ω 514.54 pF 1 900.000 000 MHz


*
Del
Cor

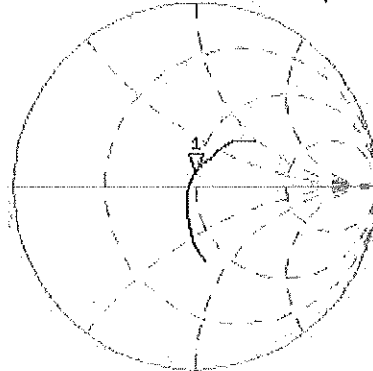

Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.974 dB 1 900.000 000 MHz

Cor
Avg
16
H1d

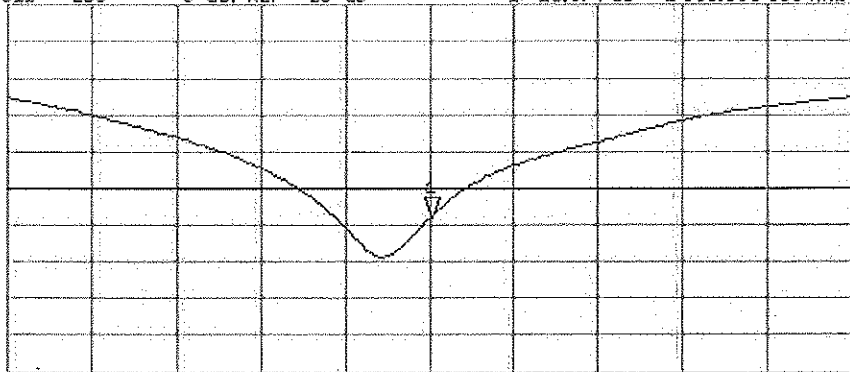



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-882_Feb15**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:882**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **February 18, 2015**

PTV
3/6/15

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | US37292783 | 07-Oct-14 (No. 217-02020) | Oct-15 |
| Power sensor HP 8481A | MY41092317 | 07-Oct-14 (No. 217-02021) | Oct-15 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 03-Apr-14 (No. 217-01918) | Apr-15 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921) | Apr-15 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-14 (No. ES3-3205_Dec14) | Dec-15 |
| DAE4 | SN: 601 | 18-Aug-14 (No. DAE4-601_Aug14) | Aug-15 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature: *[Handwritten Signature]*

Approved by: **Katja Pokovic** Name: Katja Pokovic Technical Manager

Signature: *[Handwritten Signature]*

Issued: February 18, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 38.2 \pm 6 % | 1.87 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 13.4 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 52.3 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 6.16 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 24.3 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 51.7 \pm 6 % | 2.04 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 13.0 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 50.7 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.97 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 23.5 W/kg \pm 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.8 Ω - 0.2 j Ω |
| Return Loss | - 31.2 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.4 Ω + 1.9 j Ω |
| Return Loss | - 34.4 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.156 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|------------------|
| Manufactured by | SPEAG |
| Manufactured on | October 06, 2011 |

DASY5 Validation Report for Head TSL

Date: 18.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:882

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue - ES Probe/Pin=250 mW, d=10mm/Zoom Scan



(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.95 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 17.3 W/kg

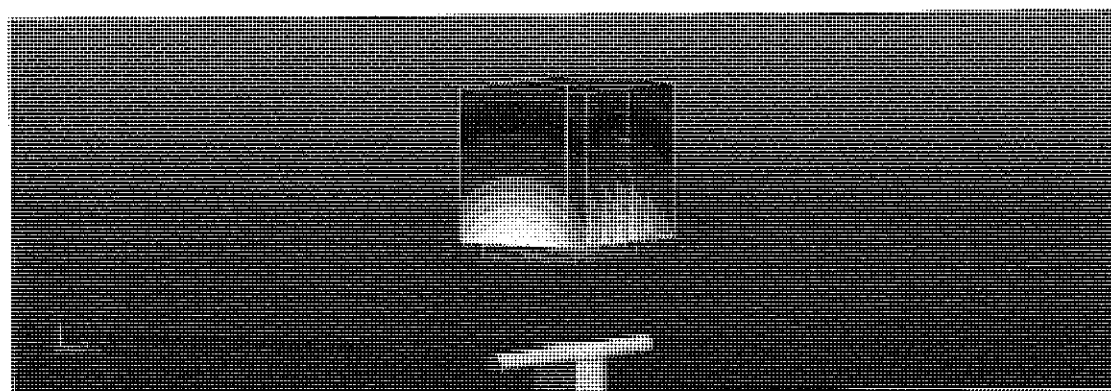

0 dB = 17.3 W/kg = 12.38 dBW/kg

Impedance Measurement Plot for Head TSL

18 Feb 2015 11:27:18


CH1 S11 1 U FS 1: 52.885 Δ -212.89 m Δ 305.14 pF 2 450.000 000 MHz

*
De1

C Δ

Avg
16

H1d

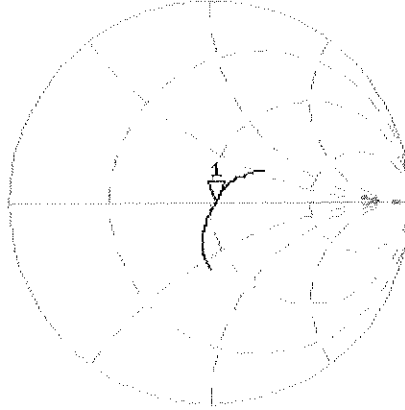


CH2 S11 LOG 5 dB/REF -20 dB 1: -31.245 dB 2 450.000 000 MHz

C Δ

Avg
16

H1d

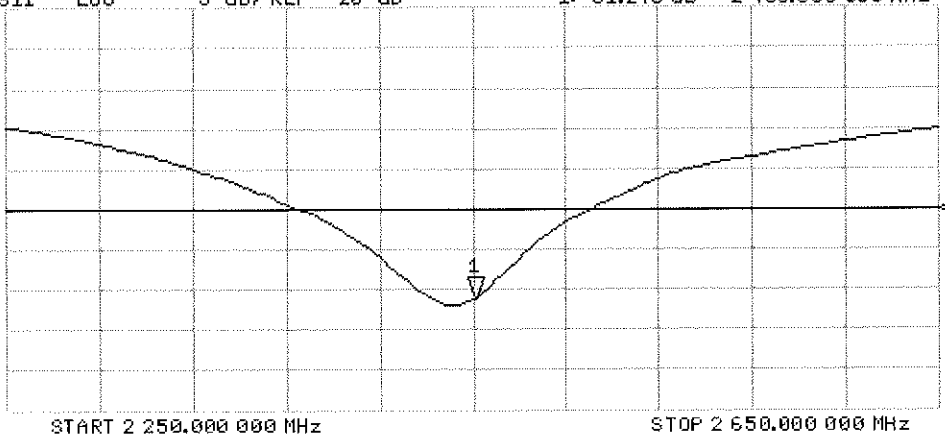

DASY5 Validation Report for Body TSL

Date: 18.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:882

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue - ES Probe/Pin=250 mW, d=10mm/Zoom Scan



(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.16 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 5.97 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

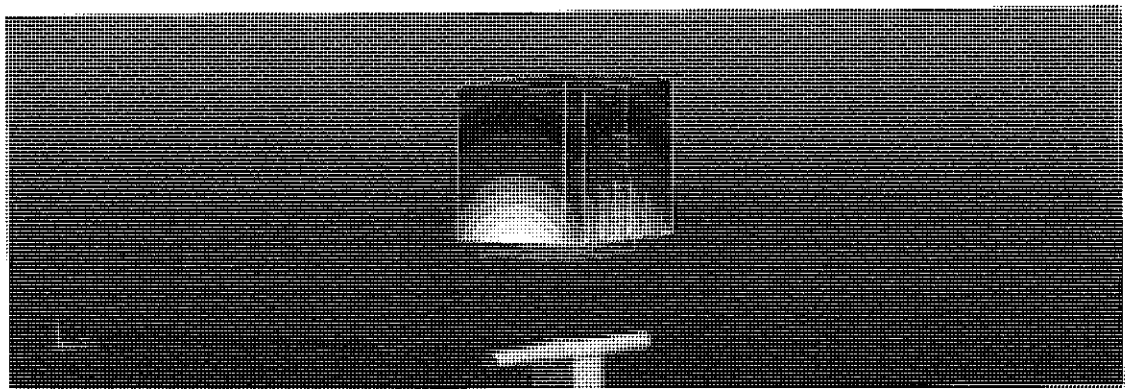


0 dB = 17.0 W/kg = 12.30 dBW/kg

Impedance Measurement Plot for Body TSL

18 Feb 2015 11:26:48

CH1 S11 1 U FS 1: 50.354 Δ 1.8009 Δ 122.18 μ H 2 450.000 000 MHz


*
De1
C Δ
Avg
15

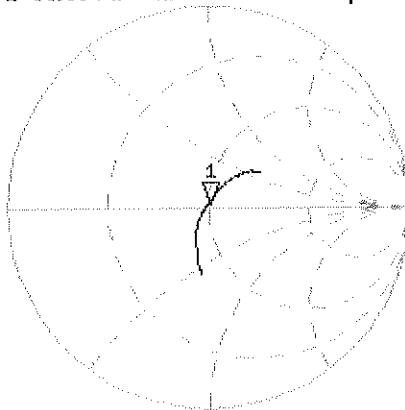

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -34.367 dB 2 450.000 000 MHz

C Δ
Avg
15

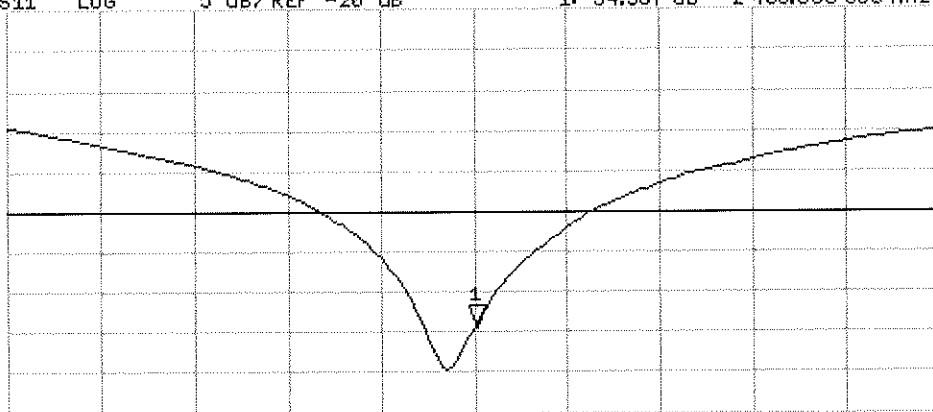

H1d

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3022_Aug14/2**

CALIBRATION CERTIFICATE (Replacement of No: ES3-3022_Aug14)

Object **ES3DV2 - SN:3022**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes** CC
D/M/14

Calibration date: **August 19, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | | | |
|----------------|-------------------------------|--|---------------|
| Calibrated by: | Name Jeton Kastrali | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | |

Issued: November 3, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV2

SN:3022

Manufactured: April 15, 2003
Calibrated: August 19, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.00 | 1.04 | 0.96 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 103.0 | 96.3 | 101.6 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|---------------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 181.8 | $\pm 2.7 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 183.0 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 192.3 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.51 | 63.1 | 12.7 | 10.00 | 42.6 | $\pm 1.9 \%$ |
| | | Y | 2.62 | 63.1 | 12.9 | | 42.7 | |
| | | Z | 3.12 | 65.7 | 13.6 | | 40.4 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 3.33 | 67.8 | 19.2 | 2.91 | 145.9 | $\pm 0.9 \%$ |
| | | Y | 3.13 | 64.9 | 16.9 | | 147.4 | |
| | | Z | 3.20 | 66.4 | 18.2 | | 139.6 | |
| 10012- CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.05 | 70.1 | 19.8 | 1.87 | 147.2 | $\pm 0.9 \%$ |
| | | Y | 2.62 | 65.1 | 16.2 | | 147.4 | |
| | | Z | 2.85 | 68.2 | 18.4 | | 141.7 | |
| 10013- CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.10 | 70.9 | 23.6 | 9.46 | 143.9 | $\pm 3.0 \%$ |
| | | Y | 11.04 | 70.2 | 22.9 | | 144.2 | |
| | | Z | 10.77 | 70.2 | 23.1 | | 134.7 | |
| 10021- DAB | GSM-FDD (TDMA, GMSK) | X | 19.66 | 99.7 | 28.6 | 9.39 | 126.0 | $\pm 1.9 \%$ |
| | | Y | 11.04 | 89.6 | 25.5 | | 138.9 | |
| | | Z | 10.45 | 88.8 | 24.9 | | 137.5 | |
| 10023- DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 20.19 | 99.6 | 28.5 | 9.57 | 142.0 | $\pm 2.5 \%$ |
| | | Y | 10.53 | 88.4 | 25.0 | | 145.5 | |
| | | Z | 15.52 | 96.5 | 27.8 | | 147.6 | |
| 10024- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 31.93 | 99.6 | 25.2 | 6.56 | 149.5 | $\pm 1.9 \%$ |
| | | Y | 12.70 | 87.9 | 22.2 | | 148.0 | |
| | | Z | 27.00 | 99.8 | 25.7 | | 135.3 | |
| 10027- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 38.32 | 99.8 | 23.8 | 4.80 | 148.1 | $\pm 2.2 \%$ |
| | | Y | 9.80 | 83.2 | 19.3 | | 138.8 | |
| | | Z | 31.96 | 99.9 | 24.2 | | 128.9 | |
| 10028- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 40.03 | 99.5 | 22.8 | 3.55 | 130.5 | $\pm 2.2 \%$ |
| | | Y | 40.27 | 99.6 | 23.0 | | 148.1 | |
| | | Z | 43.09 | 99.7 | 22.5 | | 140.1 | |
| 10032- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 38.93 | 99.4 | 20.4 | 1.16 | 146.7 | $\pm 1.9 \%$ |
| | | Y | 32.83 | 92.5 | 17.9 | | 139.2 | |
| | | Z | 31.94 | 99.5 | 20.8 | | 133.1 | |
| 10039- CAB | CDMA2000 (1xRTT, RC1) | X | 4.66 | 66.8 | 19.3 | 4.57 | 144.5 | $\pm 1.2 \%$ |
| | | Y | 4.56 | 65.3 | 17.9 | | 137.2 | |
| | | Z | 4.52 | 66.1 | 18.7 | | 131.7 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 3.82 | 66.0 | 18.7 | 3.97 | 140.3 | ±0.9 % |
| | | Y | 3.77 | 64.5 | 17.3 | | 133.6 | |
| | | Z | 3.79 | 65.7 | 18.4 | | 128.2 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 4.40 | 66.2 | 18.5 | 3.98 | 130.9 | ±1.2 % |
| | | Y | 4.39 | 65.0 | 17.4 | | 131.1 | |
| | | Z | 4.47 | 66.3 | 18.4 | | 140.0 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.30 | 67.3 | 19.8 | 5.67 | 137.4 | ±1.7 % |
| | | Y | 6.25 | 66.3 | 18.9 | | 135.9 | |
| | | Z | 6.36 | 67.4 | 19.7 | | 147.5 | |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.14 | 66.8 | 19.6 | 5.80 | 134.6 | ±1.7 % |
| | | Y | 6.17 | 66.1 | 18.9 | | 133.9 | |
| | | Z | 6.24 | 67.0 | 19.7 | | 144.5 | |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 6 MHz, QPSK) | X | 5.82 | 66.3 | 19.4 | 5.75 | 131.2 | ±1.7 % |
| | | Y | 5.82 | 65.4 | 18.6 | | 130.3 | |
| | | Z | 5.91 | 66.5 | 19.4 | | 140.4 | |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.00 | 68.5 | 21.2 | 8.10 | 124.3 | ±2.5 % |
| | | Y | 9.89 | 67.9 | 20.6 | | 124.0 | |
| | | Z | 10.05 | 68.6 | 21.2 | | 133.2 | |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.01 | 68.6 | 21.2 | 8.07 | 125.8 | ±2.5 % |
| | | Y | 9.91 | 67.9 | 20.7 | | 125.8 | |
| | | Z | 10.09 | 68.8 | 21.3 | | 134.7 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 9.69 | 75.5 | 26.4 | 9.28 | 144.7 | ±3.3 % |
| | | Y | 9.09 | 72.7 | 24.6 | | 143.2 | |
| | | Z | 8.54 | 72.0 | 24.5 | | 124.8 | |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 5.82 | 66.2 | 19.4 | 5.75 | 131.3 | ±1.9 % |
| | | Y | 6.06 | 66.3 | 19.1 | | 149.2 | |
| | | Z | 5.91 | 66.5 | 19.4 | | 140.7 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.27 | 66.9 | 19.7 | 5.82 | 136.5 | ±1.4 % |
| | | Y | 6.19 | 65.8 | 18.7 | | 128.4 | |
| | | Z | 6.33 | 67.0 | 19.6 | | 145.4 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.81 | 66.4 | 19.7 | 5.73 | 134.8 | ±1.7 % |
| | | Y | 4.92 | 66.1 | 19.1 | | 149.9 | |
| | | Z | 4.78 | 66.4 | 19.6 | | 141.2 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 7.83 | 76.6 | 27.2 | 9.21 | 131.4 | ±3.5 % |
| | | Y | 7.54 | 74.5 | 25.8 | | 147.8 | |
| | | Z | 7.71 | 76.7 | 27.4 | | 145.3 | |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.90 | 66.9 | 20.0 | 5.72 | 147.6 | ±1.4 % |
| | | Y | 4.90 | 66.0 | 19.1 | | 148.0 | |
| | | Z | 4.78 | 66.4 | 19.6 | | 141.6 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.90 | 66.9 | 20.0 | 5.72 | 148.1 | ±1.4 % |
| | | Y | 4.89 | 65.9 | 19.0 | | 146.9 | |
| | | Z | 4.80 | 66.5 | 19.7 | | 142.1 | |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 9.80 | 68.7 | 21.4 | 8.09 | 135.1 | ±2.7 % |
| | | Y | 9.78 | 68.2 | 20.9 | | 135.5 | |
| | | Z | 9.70 | 68.5 | 21.2 | | 130.2 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.79 | 68.7 | 21.4 | 8.10 | 136.4 | ±2.7 % |
| | | Y | 9.81 | 68.3 | 20.9 | | 138.0 | |
| | | Z | 9.72 | 68.6 | 21.3 | | 132.8 | |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 9.68 | 68.6 | 21.3 | 8.03 | 136.0 | ±2.7 % |
| | | Y | 9.74 | 68.3 | 21.0 | | 137.4 | |
| | | Z | 9.62 | 68.5 | 21.2 | | 132.6 | |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 10.20 | 69.1 | 21.5 | 8.06 | 143.4 | ±2.5 % |
| | | Y | 9.91 | 60.0 | 20.7 | | 125.8 | |
| | | Z | 10.27 | 69.4 | 21.6 | | 148.4 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 6.87 | 66.9 | 19.6 | 5.97 | 139.5 | ±1.9 % |
| | | Y | 7.04 | 66.9 | 19.3 | | 149.3 | |
| | | Z | 6.89 | 67.0 | 19.5 | | 143.5 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 7.66 | 75.9 | 26.9 | 9.21 | 126.1 | ±3.0 % |
| | | Y | 7.17 | 73.1 | 25.1 | | 132.1 | |
| | | Z | 7.18 | 74.6 | 26.3 | | 128.0 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 8.58 | 73.1 | 25.3 | 9.24 | 127.6 | ±3.3 % |
| | | Y | 8.22 | 71.0 | 23.7 | | 126.9 | |
| | | Z | 8.83 | 74.3 | 26.0 | | 149.8 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 9.69 | 75.5 | 26.5 | 9.30 | 143.8 | ±3.3 % |
| | | Y | 8.88 | 72.0 | 24.2 | | 135.2 | |
| | | Z | 8.83 | 72.9 | 25.1 | | 131.3 | |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 5.87 | 67.0 | 19.2 | 4.87 | 141.2 | ±1.4 % |
| | | Y | 5.77 | 65.8 | 18.1 | | 136.0 | |
| | | Z | 5.71 | 66.3 | 18.6 | | 132.7 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.44 | 67.2 | 19.2 | 3.96 | 147.3 | ±0.9 % |
| | | Y | 4.29 | 65.3 | 17.6 | | 139.2 | |
| | | Z | 4.31 | 66.3 | 18.5 | | 139.6 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.60 | 67.1 | 19.1 | 3.46 | 137.8 | ±0.7 % |
| | | Y | 3.44 | 64.8 | 17.2 | | 129.6 | |
| | | Z | 3.48 | 66.2 | 18.4 | | 130.5 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.50 | 66.9 | 18.9 | 3.39 | 139.5 | ±0.7 % |
| | | Y | 3.38 | 64.8 | 17.2 | | 132.0 | |
| | | Z | 3.48 | 66.5 | 18.5 | | 133.1 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.12 | 66.7 | 19.6 | 5.81 | 133.3 | ±1.9 % |
| | | Y | 6.35 | 66.7 | 19.3 | | 149.3 | |
| | | Z | 6.17 | 66.8 | 19.5 | | 132.7 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.72 | 67.4 | 20.0 | 6.06 | 138.7 | ±1.7 % |
| | | Y | 6.63 | 66.3 | 19.1 | | 131.4 | |
| | | Z | 6.72 | 67.3 | 19.9 | | 138.7 | |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 2.90 | 69.9 | 19.8 | 1.71 | 146.4 | ±0.5 % |
| | | Y | 2.54 | 65.2 | 16.5 | | 139.3 | |
| | | Z | 2.75 | 68.1 | 18.5 | | 146.4 | |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.12 | 69.3 | 21.9 | 8.36 | 142.9 | ±3.0 % |
| | | Y | 10.01 | 68.5 | 21.3 | | 135.2 | |
| | | Z | 10.11 | 69.3 | 21.9 | | 141.7 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 4.59 | 68.2 | 19.0 | 3.76 | 126.7 | ±0.7 % |
| | | Y | 4.59 | 67.2 | 18.0 | | 142.4 | |
| | | Z | 4.64 | 68.5 | 19.0 | | 143.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.64 | 68.8 | 19.3 | 3.77 | 147.1 | ±0.9 % |
| | | Y | 4.47 | 67.1 | 17.9 | | 139.6 | |
| | | Z | 4.54 | 68.4 | 18.9 | | 147.2 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 2.66 | 69.0 | 19.4 | 1.54 | 145.8 | ±0.5 % |
| | | Y | 2.40 | 64.8 | 16.2 | | 140.0 | |
| | | Z | 2.62 | 67.8 | 18.4 | | 147.2 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.97 | 69.1 | 21.7 | 8.23 | 142.0 | ±3.0 % |
| | | Y | 10.08 | 68.9 | 21.4 | | 145.8 | |
| | | Z | 10.01 | 69.2 | 21.8 | | 143.3 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[^] The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Pages 8 and 9).

[^] Numerical linearization parameter: uncertainty not required.

[^] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.39 | 6.39 | 6.39 | 0.20 | 2.24 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.18 | 6.18 | 6.18 | 0.23 | 1.98 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.04 | 5.04 | 5.04 | 0.51 | 1.35 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 4.85 | 4.85 | 4.85 | 0.38 | 1.66 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.31 | 4.31 | 4.31 | 0.66 | 1.28 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.13 | 4.13 | 4.13 | 0.76 | 1.28 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 450 | 56.7 | 0.94 | 6.78 | 6.78 | 6.78 | 0.12 | 1.30 | ± 13.3 % |
| 600 | 56.1 | 0.95 | 6.72 | 6.72 | 6.72 | 0.05 | 1.20 | ± 13.3 % |
| 750 | 55.5 | 0.96 | 6.02 | 6.02 | 6.02 | 0.23 | 2.05 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 5.98 | 5.98 | 5.98 | 0.29 | 1.85 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.70 | 4.70 | 4.70 | 0.66 | 1.25 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.49 | 4.49 | 4.49 | 0.33 | 2.02 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.05 | 4.05 | 4.05 | 0.80 | 1.01 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 3.94 | 3.94 | 3.94 | 0.68 | 1.03 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


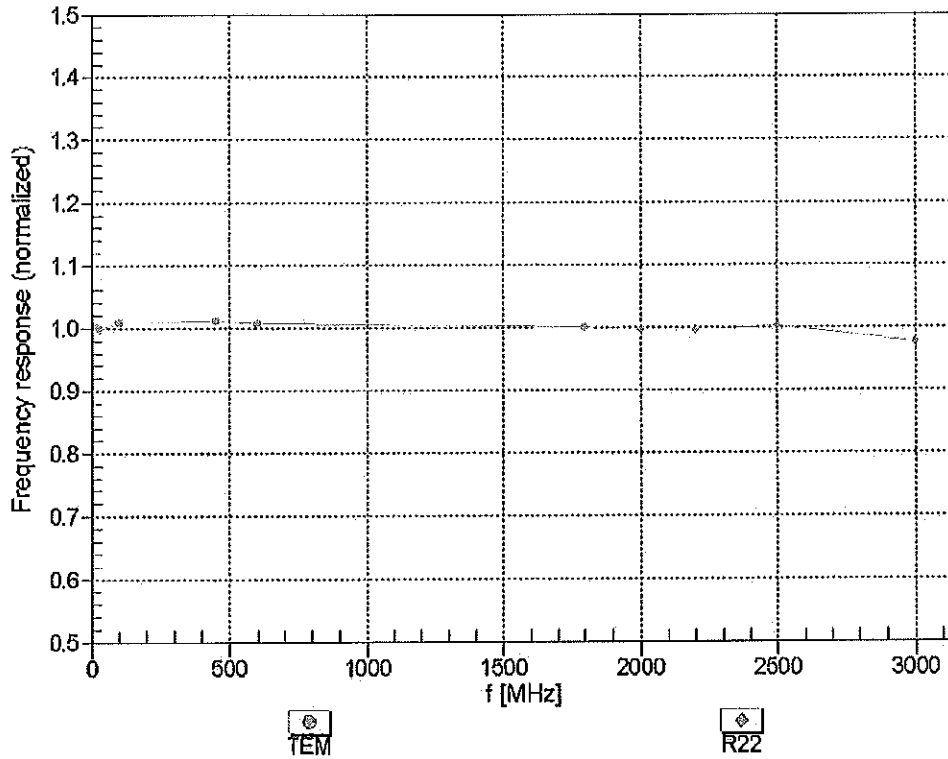


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

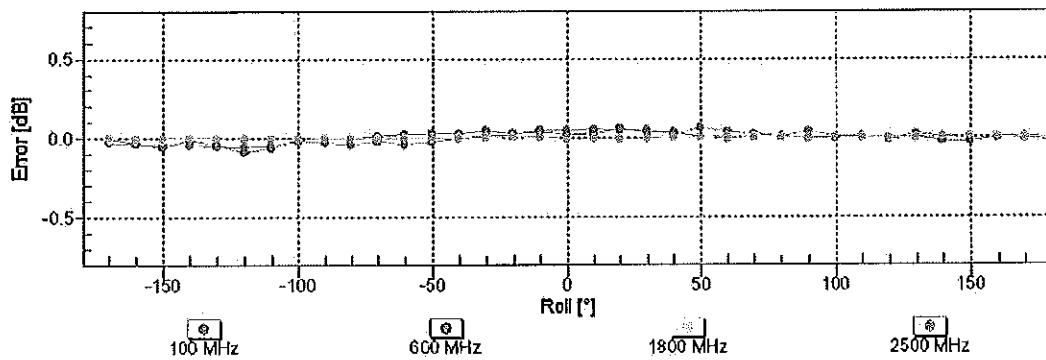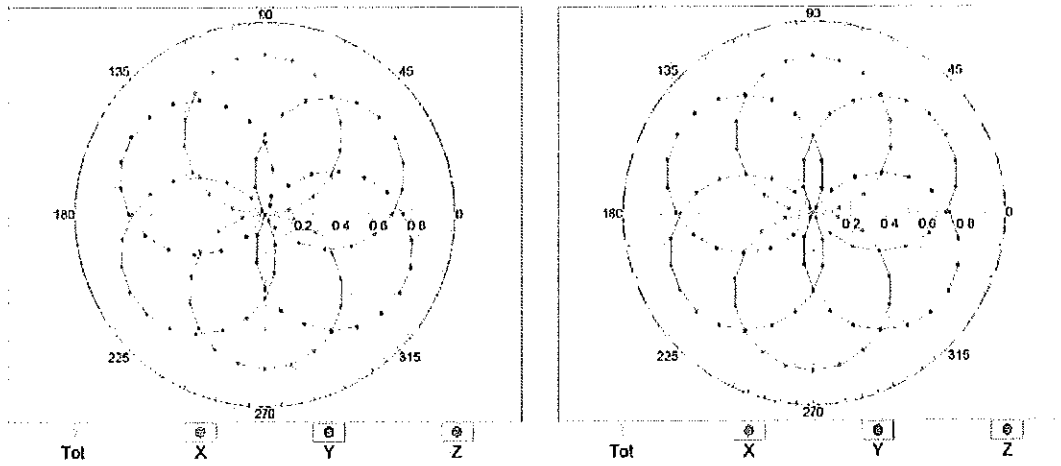


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(SAR_{head})$ (TEM cell, $f_{eval} = 1900$ MHz)

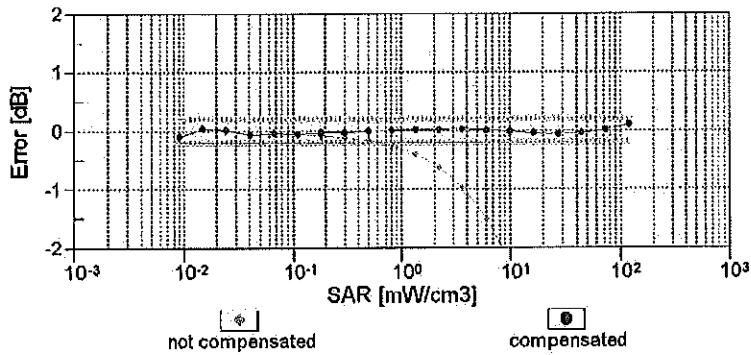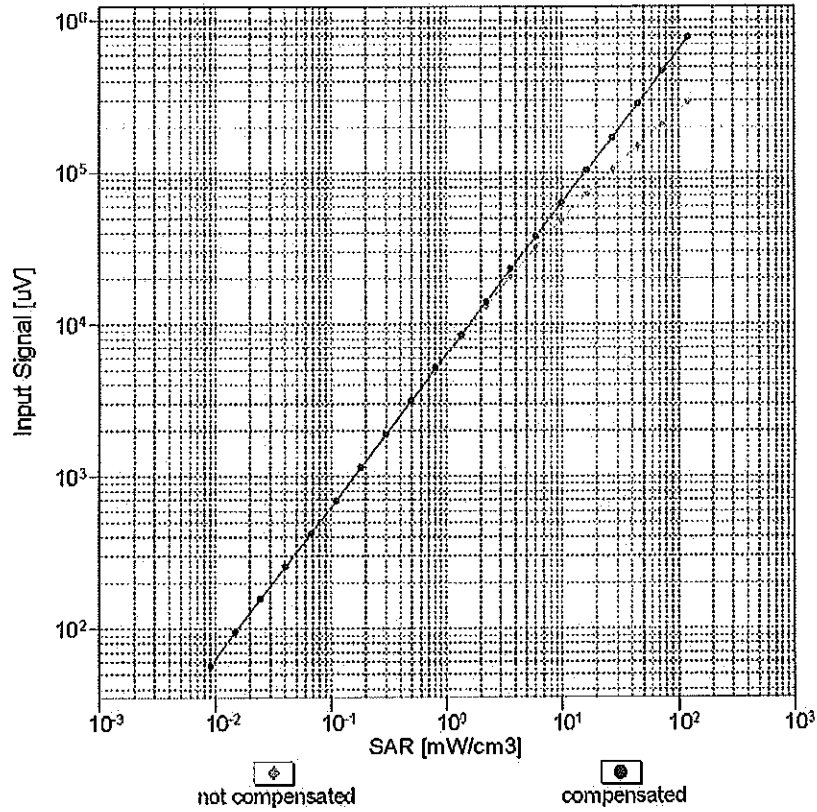


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

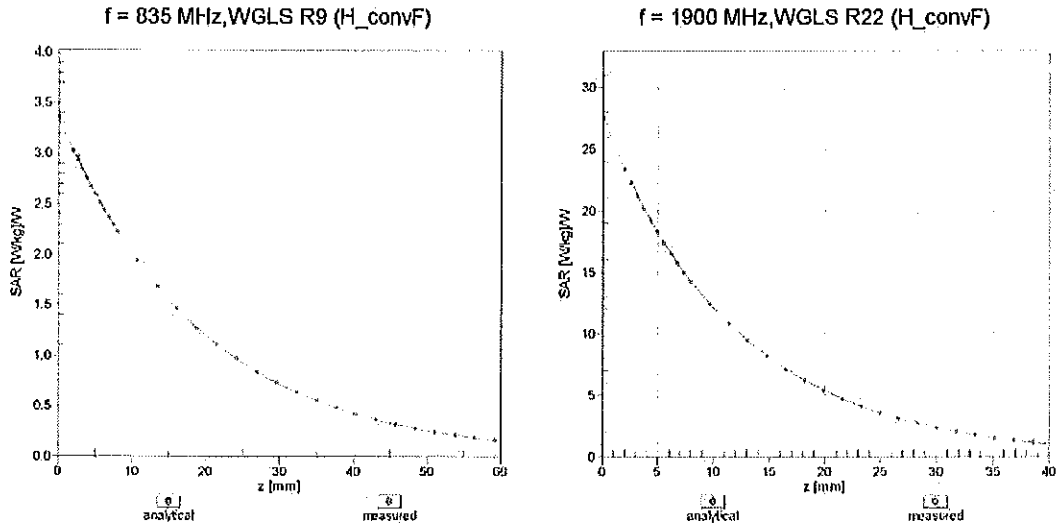

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

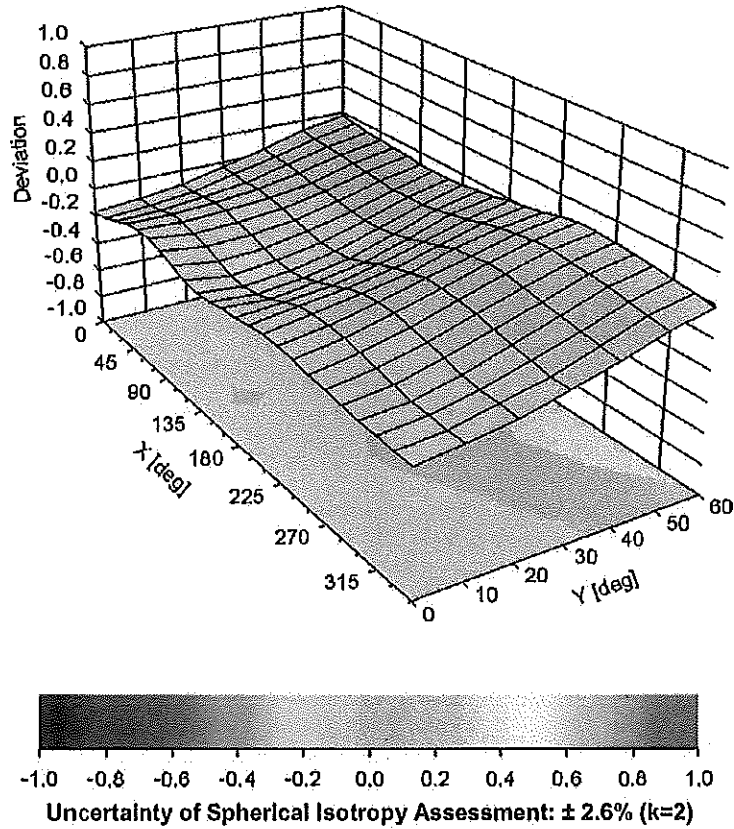

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -80,3 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3263_May14**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3263**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

OCV
7/17/14

Calibration date: **May 15, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|----------------------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |
| | | | Issued: May 15, 2014 |

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3263

Manufactured: January 25, 2010
Calibrated: May 15, 2014

Calibrated for DASYS/EASY Systems
(Note: non-compatible with DASYS2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.21 | 1.24 | 1.13 | $\pm 10.1\%$ |
| DCP (mV) ^B | 103.8 | 102.3 | 104.7 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|---------------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 156.3 | $\pm 3.5\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 203.1 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 197.2 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.33 | 59.4 | 10.8 | 10.00 | 46.4 | $\pm 1.4\%$ |
| | | Y | 4.39 | 63.4 | 13.6 | | 50.8 | |
| | | Z | 1.35 | 55.5 | 7.8 | | 39.6 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 3.49 | 68.2 | 19.1 | 2.91 | 126.7 | $\pm 0.7\%$ |
| | | Y | 3.28 | 66.9 | 18.5 | | 120.7 | |
| | | Z | 2.74 | 63.1 | 15.1 | | 113.5 | |
| 10012- CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.51 | 72.0 | 20.3 | 1.87 | 127.9 | $\pm 0.7\%$ |
| | | Y | 3.21 | 69.4 | 18.8 | | 124.1 | |
| | | Z | 1.93 | 60.6 | 12.6 | | 113.3 | |
| 10013- CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.30 | 70.8 | 23.3 | 9.46 | 125.2 | $\pm 2.5\%$ |
| | | Y | 12.42 | 72.7 | 24.4 | | 129.4 | |
| | | Z | 10.03 | 67.8 | 21.1 | | 105.5 | |
| 10021- DAB | GSM-FDD (TDMA, GMSK) | X | 24.45 | 99.1 | 27.6 | 9.39 | 141.4 | $\pm 1.4\%$ |
| | | Y | 29.93 | 99.5 | 29.0 | | 124.5 | |
| | | Z | 4.53 | 73.0 | 18.1 | | 111.6 | |
| 10023- DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 25.10 | 99.7 | 27.9 | 9.57 | 134.2 | $\pm 1.9\%$ |
| | | Y | 24.85 | 96.1 | 28.0 | | 120.2 | |
| | | Z | 5.99 | 76.5 | 19.1 | | 142.5 | |
| 10024- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 24.34 | 93.0 | 23.0 | 6.56 | 117.1 | $\pm 1.4\%$ |
| | | Y | 26.49 | 92.6 | 24.2 | | 148.7 | |
| | | Z | 4.00 | 69.6 | 13.8 | | 136.6 | |
| 10027- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 51.24 | 99.9 | 23.5 | 4.80 | 131.1 | $\pm 1.9\%$ |
| | | Y | 56.83 | 99.5 | 24.3 | | 101.8 | |
| | | Z | 1.70 | 61.4 | 9.1 | | 107.7 | |
| 10028- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 60.12 | 99.6 | 22.2 | 3.55 | 138.7 | $\pm 1.9\%$ |
| | | Y | 64.73 | 99.9 | 23.4 | | 105.5 | |
| | | Z | 1.13 | 58.4 | 6.0 | | 116.0 | |
| 10032- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 77.27 | 99.6 | 19.6 | 1.16 | 149.5 | $\pm 2.5\%$ |
| | | Y | 60.44 | 99.7 | 21.0 | | 109.4 | |
| | | Z | 0.34 | 55.9 | 2.9 | | 131.4 | |
| 10039- CAB | CDMA2000 (1xRTT, RC1) | X | 4.79 | 66.8 | 19.0 | 4.57 | 124.5 | $\pm 0.9\%$ |
| | | Y | 4.85 | 66.4 | 18.8 | | 125.6 | |
| | | Z | 4.06 | 63.4 | 16.1 | | 108.1 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 3.93 | 66.1 | 18.5 | 3.97 | 119.8 | ±0.7 % |
| | | Y | 3.90 | 65.5 | 18.2 | | 120.1 | |
| | | Z | 3.29 | 62.4 | 15.3 | | 108.5 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 4.68 | 66.9 | 18.7 | 3.98 | 131.2 | ±0.7 % |
| | | Y | 4.64 | 66.6 | 18.6 | | 130.5 | |
| | | Z | 4.15 | 64.5 | 16.5 | | 118.8 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.61 | 68.1 | 20.0 | 5.67 | 137.5 | ±1.7 % |
| | | Y | 6.70 | 68.4 | 20.2 | | 137.7 | |
| | | Z | 5.90 | 65.6 | 17.9 | | 124.0 | |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.44 | 67.5 | 19.8 | 5.80 | 135.1 | ±1.7 % |
| | | Y | 6.60 | 68.0 | 20.1 | | 135.4 | |
| | | Z | 5.75 | 64.9 | 17.6 | | 121.8 | |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 6.14 | 67.1 | 19.7 | 5.75 | 131.6 | ±1.2 % |
| | | Y | 6.28 | 67.4 | 19.9 | | 132.7 | |
| | | Z | 5.62 | 65.5 | 18.2 | | 118.4 | |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.18 | 68.8 | 21.2 | 8.10 | 124.3 | ±1.9 % |
| | | Y | 10.60 | 69.7 | 21.8 | | 126.2 | |
| | | Z | 9.38 | 67.0 | 19.8 | | 108.4 | |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.23 | 68.9 | 21.3 | 8.07 | 125.0 | ±1.9 % |
| | | Y | 10.56 | 69.6 | 21.7 | | 127.1 | |
| | | Z | 9.37 | 67.1 | 19.8 | | 109.1 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 10.23 | 75.7 | 26.0 | 9.28 | 125.0 | ±2.7 % |
| | | Y | 14.60 | 83.3 | 29.5 | | 147.3 | |
| | | Z | 8.05 | 69.7 | 22.3 | | 106.3 | |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.12 | 67.0 | 19.6 | 5.75 | 131.6 | ±1.4 % |
| | | Y | 6.28 | 67.4 | 19.9 | | 132.4 | |
| | | Z | 5.49 | 64.7 | 17.4 | | 117.9 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.57 | 67.5 | 19.8 | 5.82 | 136.0 | ±1.4 % |
| | | Y | 6.71 | 67.9 | 20.1 | | 137.1 | |
| | | Z | 5.89 | 65.2 | 17.8 | | 122.4 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.82 | 66.0 | 19.3 | 5.73 | 113.5 | ±1.4 % |
| | | Y | 5.12 | 66.3 | 19.4 | | 116.6 | |
| | | Z | 4.75 | 65.9 | 18.3 | | 142.7 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 9.53 | 80.6 | 28.6 | 9.21 | 136.5 | ±2.2 % |
| | | Y | 11.32 | 81.6 | 28.8 | | 109.2 | |
| | | Z | 6.84 | 72.0 | 23.8 | | 117.3 | |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.86 | 66.2 | 19.4 | 5.72 | 112.9 | ±1.2 % |
| | | Y | 5.10 | 66.2 | 19.4 | | 115.9 | |
| | | Z | 4.55 | 64.9 | 17.8 | | 137.7 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.81 | 66.0 | 19.2 | 5.72 | 111.6 | ±1.2 % |
| | | Y | 5.13 | 66.4 | 19.5 | | 116.1 | |
| | | Z | 4.70 | 65.7 | 18.3 | | 137.1 | |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 9.80 | 68.3 | 21.0 | 8.09 | 117.2 | ±2.2 % |
| | | Y | 10.23 | 69.1 | 21.6 | | 121.5 | |
| | | Z | 9.85 | 68.9 | 20.8 | | 148.4 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.81 | 68.4 | 21.1 | 8.10 | 117.7 | ±2.2 % |
| | | Y | 10.23 | 69.2 | 21.6 | | 121.7 | |
| | | Z | 9.87 | 69.0 | 20.9 | | 149.9 | |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 9.71 | 68.3 | 21.0 | 8.03 | 117.8 | ±2.2 % |
| | | Y | 10.12 | 69.1 | 21.6 | | 121.0 | |
| | | Z | 8.90 | 66.6 | 19.6 | | 104.1 | |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 10.14 | 68.7 | 21.2 | 8.06 | 122.3 | ±1.9 % |
| | | Y | 10.52 | 69.5 | 21.7 | | 125.4 | |
| | | Z | 9.28 | 66.8 | 19.6 | | 108.5 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 7.25 | 67.8 | 19.9 | 5.97 | 146.3 | ±1.7 % |
| | | Y | 7.32 | 67.5 | 19.8 | | 149.3 | |
| | | Z | 6.52 | 65.7 | 18.0 | | 130.7 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 9.55 | 80.7 | 28.7 | 9.21 | 137.2 | ±2.5 % |
| | | Y | 11.34 | 81.7 | 28.9 | | 109.9 | |
| | | Z | 6.98 | 72.5 | 24.0 | | 119.5 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 9.26 | 74.1 | 25.3 | 9.24 | 115.6 | ±3.3 % |
| | | Y | 13.72 | 82.5 | 29.3 | | 137.9 | |
| | | Z | 8.83 | 73.3 | 24.4 | | 144.1 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 10.06 | 75.2 | 25.8 | 9.30 | 122.9 | ±2.7 % |
| | | Y | 14.69 | 83.4 | 29.6 | | 147.6 | |
| | | Z | 8.02 | 69.6 | 22.3 | | 103.4 | |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 6.08 | 67.2 | 19.0 | 4.87 | 140.2 | ±1.2 % |
| | | Y | 6.23 | 67.5 | 19.2 | | 143.5 | |
| | | Z | 5.52 | 65.4 | 17.4 | | 125.1 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.44 | 66.7 | 18.7 | 3.96 | 122.1 | ±0.7 % |
| | | Y | 4.39 | 66.3 | 18.5 | | 124.4 | |
| | | Z | 3.83 | 63.7 | 16.0 | | 114.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.64 | 66.7 | 18.6 | 3.46 | 115.7 | ±0.7 % |
| | | Y | 3.60 | 66.0 | 18.2 | | 118.0 | |
| | | Z | 3.17 | 64.2 | 16.3 | | 108.4 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.62 | 67.0 | 18.8 | 3.39 | 116.9 | ±0.9 % |
| | | Y | 3.54 | 66.1 | 18.2 | | 119.1 | |
| | | Z | 3.24 | 64.2 | 15.8 | | 145.6 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.43 | 67.5 | 19.8 | 5.81 | 132.0 | ±1.4 % |
| | | Y | 6.60 | 68.0 | 20.1 | | 134.9 | |
| | | Z | 5.81 | 65.4 | 18.0 | | 115.0 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 7.04 | 68.1 | 20.2 | 6.06 | 137.5 | ±1.4 % |
| | | Y | 7.19 | 68.6 | 20.5 | | 140.3 | |
| | | Z | 6.26 | 65.7 | 18.2 | | 119.6 | |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 3.05 | 70.0 | 19.4 | 1.71 | 121.7 | ±0.7 % |
| | | Y | 2.91 | 68.7 | 18.7 | | 123.4 | |
| | | Z | 1.83 | 60.2 | 12.3 | | 108.4 | |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.05 | 68.7 | 21.4 | 8.36 | 117.3 | ±1.9 % |
| | | Y | 10.57 | 69.7 | 22.0 | | 122.8 | |
| | | Z | 9.11 | 66.5 | 19.7 | | 103.1 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 4.81 | 68.3 | 18.8 | 3.76 | 125.8 | ±0.7 % |
| | | Y | 4.65 | 66.5 | 18.1 | | 130.8 | |
| | | Z | 3.98 | 64.7 | 16.0 | | 114.7 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.91 | 69.1 | 19.2 | 3.77 | 123.3 | ±0.7 % |
| | | Y | 4.60 | 66.6 | 18.1 | | 128.5 | |
| | | Z | 3.73 | 64.0 | 15.4 | | 112.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 2.78 | 69.0 | 19.0 | 1.54 | 121.9 | ±0.7 % |
| | | Y | 2.46 | 66.8 | 17.9 | | 122.5 | |
| | | Z | 1.83 | 60.9 | 13.0 | | 112.4 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.88 | 68.4 | 21.2 | 8.23 | 116.6 | ±1.7 % |
| | | Y | 10.29 | 69.2 | 21.7 | | 121.5 | |
| | | Z | 9.25 | 67.3 | 20.2 | | 103.4 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 8 and 9).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.42 | 6.42 | 6.42 | 0.72 | 1.18 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.23 | 6.23 | 6.23 | 0.27 | 2.02 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.41 | 5.41 | 5.41 | 0.74 | 1.23 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.08 | 5.08 | 5.08 | 0.80 | 1.16 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.47 | 4.47 | 4.47 | 0.80 | 1.22 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.33 | 4.33 | 4.33 | 0.66 | 1.41 | ± 12.0 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.19 | 6.19 | 6.19 | 0.52 | 1.41 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.16 | 6.16 | 6.16 | 0.68 | 1.28 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.98 | 4.98 | 4.98 | 0.38 | 1.91 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.78 | 4.78 | 4.78 | 0.66 | 1.35 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.27 | 4.27 | 4.27 | 0.72 | 1.13 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.11 | 4.11 | 4.11 | 0.74 | 1.07 | ± 12.0 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)



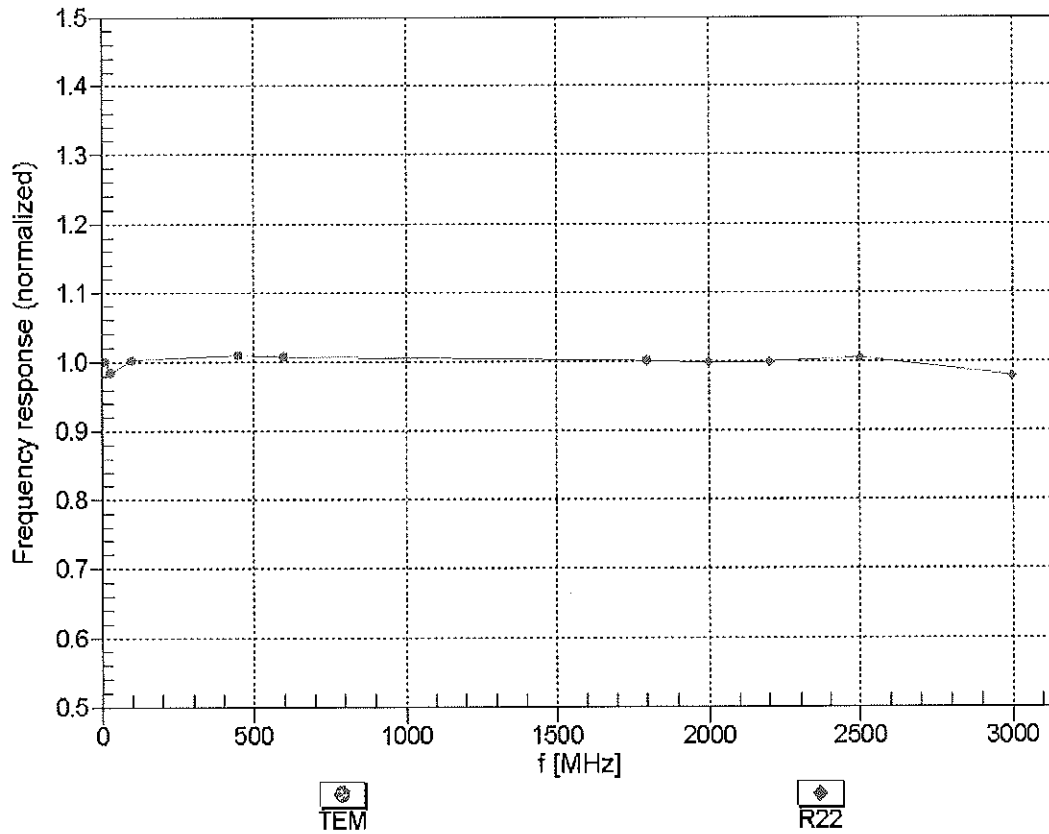


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

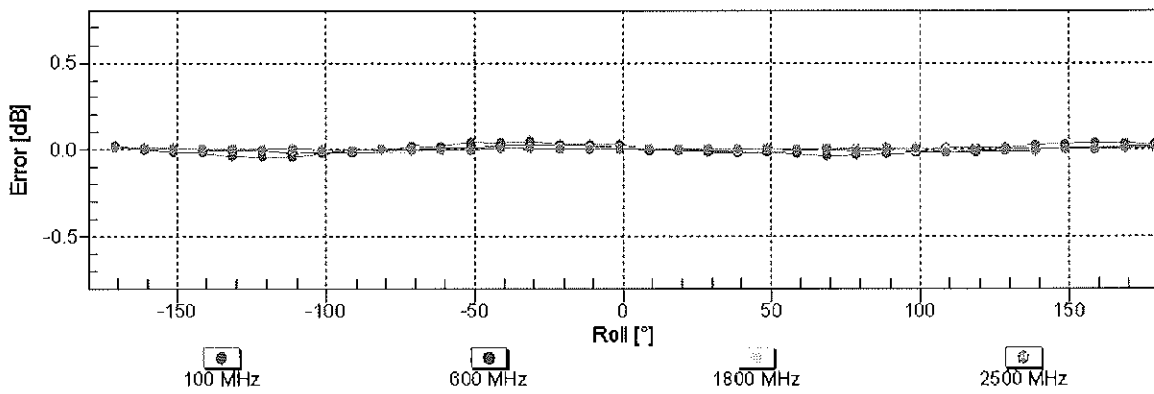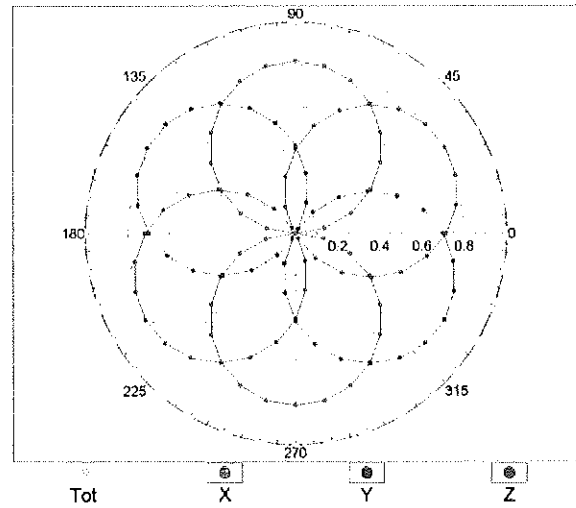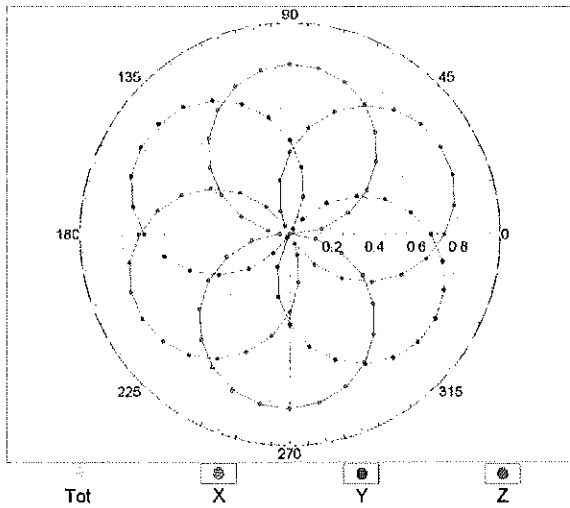


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}}=1900 \text{ MHz}$)

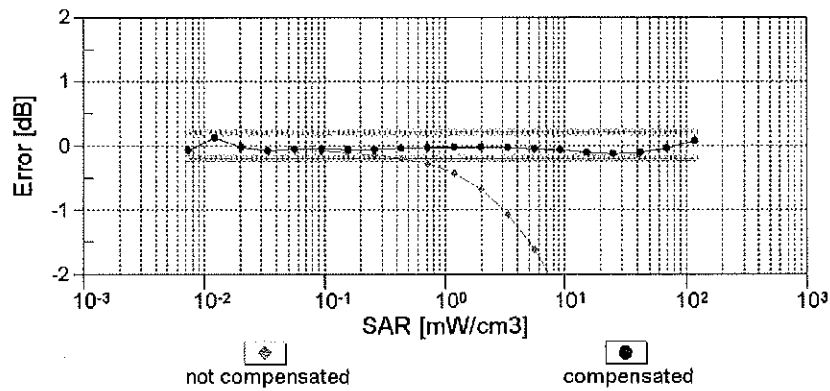
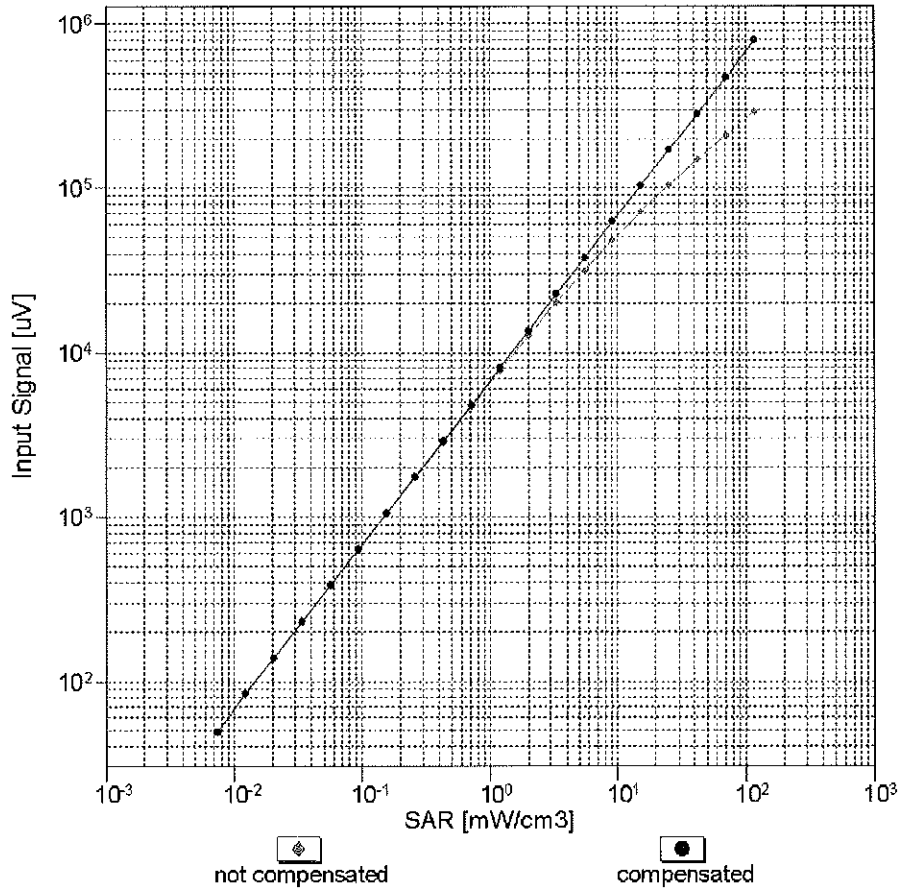


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

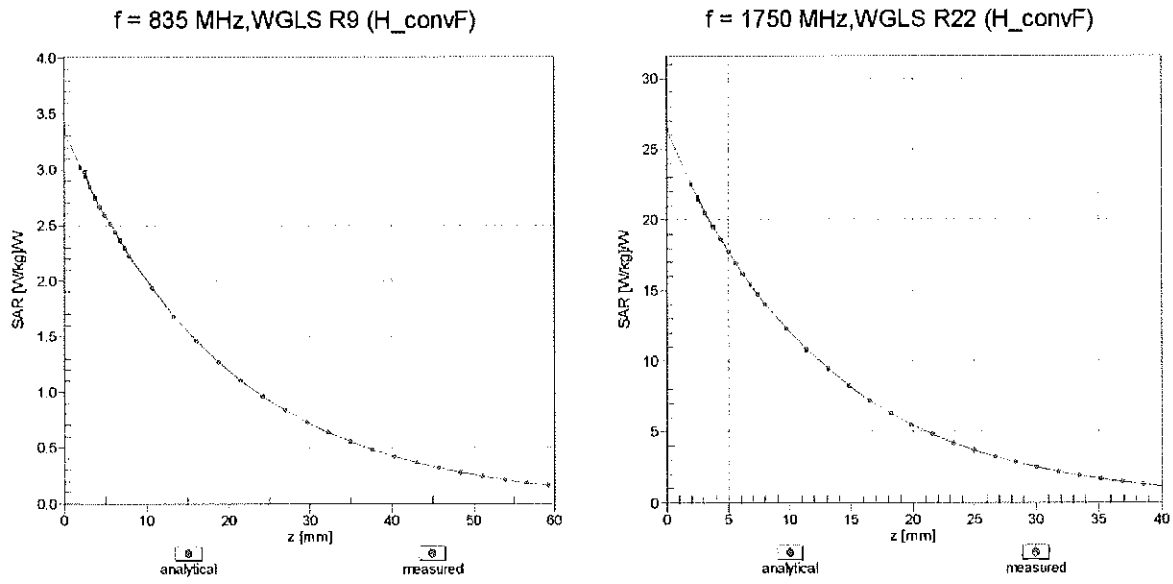

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

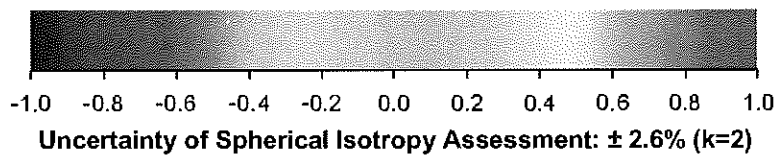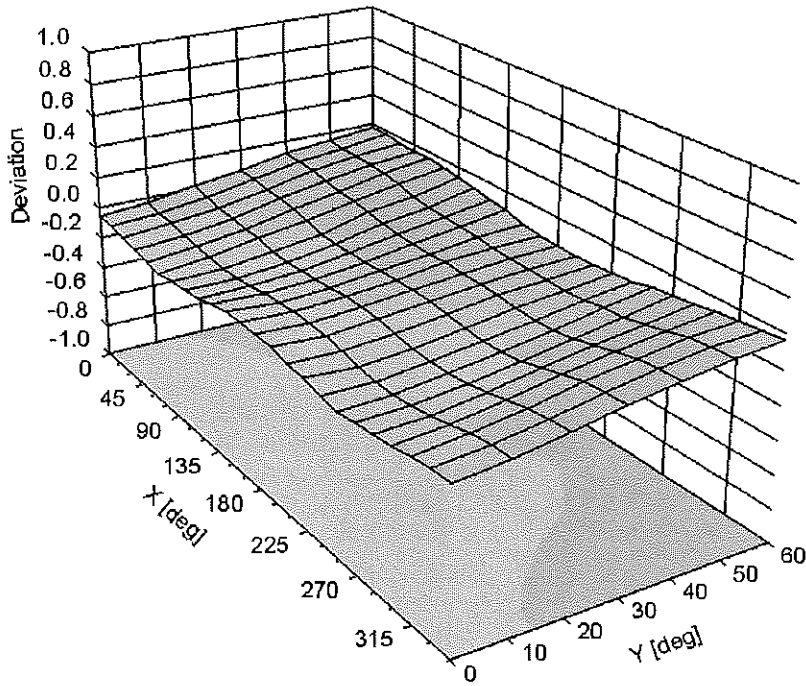

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -111.2 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S S C S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3288_Sep14/2**

CALIBRATION CERTIFICATE (Replacement of No:ES3-3288_Sep14)

Object **ES3DV3 - SN:3288**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes** CC
11/12/14

Calibration date: **September 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | Name | Function | Signature |
|----------------|---------------|-----------------------|-----------|
| Calibrated by: | Leif Klysner | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: November 3, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3288

| | |
|---------------|--------------------|
| Manufactured: | July 6, 2010 |
| Repaired: | September 18, 2014 |
| Calibrated: | September 24, 2014 |

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.05 | 1.16 | 0.92 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 105.1 | 104.6 | 106.7 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|---------------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 195.8 | $\pm 3.5 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 175.9 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 177.1 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.71 | 61.9 | 11.4 | 10.00 | 40.3 | $\pm 2.2 \%$ |
| | | Y | 2.37 | 60.2 | 11.2 | | 42.6 | |
| | | Z | 1.54 | 56.6 | 8.9 | | 41.2 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 3.29 | 67.1 | 18.4 | 2.91 | 133.8 | $\pm 0.5 \%$ |
| | | Y | 3.43 | 67.9 | 18.9 | | 139.5 | |
| | | Z | 3.45 | 68.1 | 18.9 | | 141.3 | |
| 10012- CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 2.99 | 68.9 | 18.6 | 1.87 | 135.1 | $\pm 0.7 \%$ |
| | | Y | 3.59 | 72.4 | 20.4 | | 140.7 | |
| | | Z | 3.54 | 72.4 | 20.3 | | 143.0 | |
| 10013- CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.15 | 70.8 | 23.3 | 9.46 | 132.3 | $\pm 3.5 \%$ |
| | | Y | 11.29 | 70.8 | 23.2 | | 141.1 | |
| | | Z | 11.07 | 70.7 | 23.2 | | 139.2 | |
| 10021- DAB | GSM-FDD (TDMA, GMSK) | X | 14.71 | 90.5 | 24.5 | 9.39 | 149.0 | $\pm 1.9 \%$ |
| | | Y | 16.40 | 92.8 | 26.0 | | 131.3 | |
| | | Z | 11.34 | 87.2 | 23.6 | | 126.1 | |
| 10023- DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 15.91 | 92.2 | 25.3 | 9.57 | 138.9 | $\pm 2.5 \%$ |
| | | Y | 21.25 | 96.9 | 27.2 | | 142.0 | |
| | | Z | 11.68 | 87.2 | 23.5 | | 145.9 | |
| 10024- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 38.62 | 99.8 | 24.7 | 6.56 | 123.8 | $\pm 2.2 \%$ |
| | | Y | 36.71 | 99.7 | 25.2 | | 128.1 | |
| | | Z | 36.56 | 99.4 | 24.5 | | 129.5 | |
| 10027- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 56.60 | 99.6 | 22.6 | 4.80 | 138.8 | $\pm 1.9 \%$ |
| | | Y | 46.94 | 99.9 | 23.7 | | 149.9 | |
| | | Z | 51.17 | 99.8 | 22.9 | | 144.9 | |
| 10028- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 70.88 | 100.0 | 21.6 | 3.55 | 147.5 | $\pm 1.9 \%$ |
| | | Y | 52.58 | 99.8 | 22.6 | | 129.4 | |
| | | Z | 76.98 | 99.8 | 21.2 | | 128.7 | |
| 10032- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 98.89 | 99.5 | 18.9 | 1.16 | 135.8 | $\pm 1.4 \%$ |
| | | Y | 78.39 | 99.6 | 19.5 | | 141.7 | |
| | | Z | 95.21 | 95.5 | 17.1 | | 143.4 | |
| 10039- CAB | CDMA2000 (1xRTT, RC1) | X | 4.72 | 66.7 | 18.9 | 4.57 | 133.7 | $\pm 0.9 \%$ |
| | | Y | 4.85 | 67.1 | 19.1 | | 137.7 | |
| | | Z | 4.81 | 67.4 | 19.2 | | 141.9 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 3.91 | 66.3 | 18.6 | 3.97 | 129.5 | ±0.7 % |
| | | Y | 4.00 | 66.6 | 18.7 | | 133.7 | |
| | | Z | 3.99 | 66.8 | 18.8 | | 137.5 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 4.63 | 66.9 | 18.7 | 3.98 | 141.4 | ±0.7 % |
| | | Y | 4.78 | 67.5 | 19.0 | | 147.7 | |
| | | Z | 4.57 | 66.8 | 18.6 | | 127.8 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.59 | 68.2 | 20.1 | 5.67 | 149.2 | ±1.4 % |
| | | Y | 6.36 | 67.3 | 19.6 | | 130.7 | |
| | | Z | 6.36 | 67.5 | 19.6 | | 133.6 | |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.44 | 67.8 | 20.0 | 5.80 | 146.6 | ±1.4 % |
| | | Y | 6.23 | 66.8 | 19.4 | | 128.8 | |
| | | Z | 6.24 | 67.1 | 19.6 | | 131.4 | |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 6.08 | 67.1 | 19.6 | 5.75 | 143.2 | ±1.4 % |
| | | Y | 6.20 | 67.4 | 19.8 | | 148.0 | |
| | | Z | 5.92 | 66.6 | 19.3 | | 128.5 | |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.32 | 69.3 | 21.5 | 8.10 | 137.0 | ±2.2 % |
| | | Y | 10.31 | 69.1 | 21.4 | | 143.5 | |
| | | Z | 10.37 | 69.5 | 21.6 | | 146.1 | |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.35 | 69.4 | 21.6 | 8.07 | 138.3 | ±2.2 % |
| | | Y | 10.36 | 69.3 | 21.4 | | 146.4 | |
| | | Z | 10.42 | 69.6 | 21.6 | | 149.0 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 9.95 | 75.7 | 26.2 | 9.28 | 134.9 | ±3.3 % |
| | | Y | 10.37 | 76.0 | 26.1 | | 146.6 | |
| | | Z | 9.77 | 75.4 | 26.0 | | 142.5 | |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.12 | 67.2 | 19.7 | 5.75 | 144.9 | ±1.4 % |
| | | Y | 6.21 | 67.4 | 19.8 | | 148.8 | |
| | | Z | 5.91 | 66.5 | 19.3 | | 128.7 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.28 | 66.7 | 19.4 | 5.82 | 125.5 | ±1.2 % |
| | | Y | 6.37 | 66.8 | 19.4 | | 129.7 | |
| | | Z | 6.36 | 67.1 | 19.6 | | 132.9 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 5.08 | 67.6 | 20.2 | 5.73 | 147.0 | ±1.2 % |
| | | Y | 4.95 | 66.6 | 19.6 | | 128.6 | |
| | | Z | 4.91 | 66.9 | 19.8 | | 131.2 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 8.18 | 77.2 | 27.2 | 9.21 | 123.4 | ±2.7 % |
| | | Y | 8.37 | 76.6 | 26.6 | | 129.5 | |
| | | Z | 7.97 | 76.7 | 26.9 | | 128.7 | |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 5.05 | 67.4 | 20.1 | 5.72 | 146.2 | ±1.4 % |
| | | Y | 5.10 | 67.3 | 20.0 | | 142.8 | |
| | | Z | 4.87 | 66.7 | 19.6 | | 129.6 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 5.04 | 67.4 | 20.0 | 5.72 | 145.5 | ±1.2 % |
| | | Y | 5.12 | 67.4 | 20.0 | | 143.4 | |
| | | Z | 4.87 | 66.7 | 19.6 | | 129.9 | |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 9.92 | 68.9 | 21.4 | 8.09 | 131.0 | ±2.2 % |
| | | Y | 9.84 | 68.5 | 21.1 | | 130.0 | |
| | | Z | 9.94 | 69.0 | 21.4 | | 138.6 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.90 | 68.9 | 21.4 | 8.10 | 130.8 | ±2.2 % |
| | | Y | 9.81 | 68.4 | 21.0 | | 131.4 | |
| | | Z | 9.95 | 69.1 | 21.5 | | 140.5 | |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 9.81 | 68.8 | 21.3 | 8.03 | 130.0 | ±2.2 % |
| | | Y | 9.89 | 68.9 | 21.3 | | 138.1 | |
| | | Z | 9.89 | 69.1 | 21.5 | | 140.5 | |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 10.25 | 69.2 | 21.4 | 8.06 | 137.1 | ±2.2 % |
| | | Y | 10.30 | 69.2 | 21.4 | | 144.4 | |
| | | Z | 10.38 | 69.6 | 21.6 | | 148.4 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 6.90 | 66.8 | 19.3 | 5.97 | 132.8 | ±1.4 % |
| | | Y | 7.09 | 67.3 | 19.6 | | 142.0 | |
| | | Z | 7.04 | 67.4 | 19.6 | | 143.5 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 9.61 | 81.9 | 29.6 | 9.21 | 149.3 | ±2.7 % |
| | | Y | 8.66 | 77.6 | 27.1 | | 133.7 | |
| | | Z | 8.20 | 77.5 | 27.3 | | 132.2 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 9.16 | 74.5 | 25.8 | 9.24 | 126.3 | ±3.0 % |
| | | Y | 9.62 | 75.0 | 25.8 | | 137.4 | |
| | | Z | 9.16 | 74.8 | 25.9 | | 135.2 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 9.97 | 75.7 | 26.3 | 9.30 | 133.7 | ±3.3 % |
| | | Y | 10.38 | 75.9 | 26.1 | | 146.1 | |
| | | Z | 9.91 | 75.7 | 26.3 | | 143.8 | |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 5.86 | 66.6 | 18.7 | 4.87 | 129.9 | ±0.9 % |
| | | Y | 6.01 | 67.1 | 19.0 | | 135.7 | |
| | | Z | 5.95 | 67.1 | 19.0 | | 139.4 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.40 | 66.7 | 18.6 | 3.96 | 136.4 | ±0.7 % |
| | | Y | 4.55 | 67.3 | 19.0 | | 138.3 | |
| | | Z | 4.56 | 67.6 | 19.1 | | 144.3 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.64 | 66.9 | 18.7 | 3.46 | 127.4 | ±0.5 % |
| | | Y | 3.77 | 67.6 | 19.1 | | 130.2 | |
| | | Z | 3.72 | 67.5 | 19.0 | | 134.4 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.58 | 67.0 | 18.7 | 3.39 | 128.4 | ±0.5 % |
| | | Y | 3.73 | 67.7 | 19.1 | | 132.7 | |
| | | Z | 3.69 | 67.8 | 19.1 | | 136.1 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.43 | 67.7 | 19.9 | 5.81 | 145.5 | ±1.4 % |
| | | Y | 6.49 | 67.7 | 19.9 | | 149.5 | |
| | | Z | 6.23 | 67.0 | 19.6 | | 129.5 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.74 | 67.3 | 19.8 | 6.06 | 126.7 | ±1.4 % |
| | | Y | 6.83 | 67.5 | 19.8 | | 132.9 | |
| | | Z | 6.81 | 67.6 | 19.9 | | 135.8 | |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 3.00 | 69.9 | 19.4 | 1.71 | 133.9 | ±0.5 % |
| | | Y | 3.30 | 71.5 | 20.1 | | 141.0 | |
| | | Z | 3.22 | 71.4 | 20.0 | | 142.9 | |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.17 | 69.2 | 21.8 | 8.36 | 130.5 | ±2.5 % |
| | | Y | 10.20 | 69.1 | 21.6 | | 138.4 | |
| | | Z | 10.20 | 69.4 | 21.8 | | 140.7 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 4.75 | 68.3 | 18.8 | 3.76 | 138.5 | ±0.7 % |
| | | Y | 5.00 | 69.1 | 19.2 | | 146.7 | |
| | | Z | 4.92 | 69.2 | 19.1 | | 148.5 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.73 | 68.6 | 18.9 | 3.77 | 136.3 | ±0.7 % |
| | | Y | 4.97 | 69.4 | 19.4 | | 143.7 | |
| | | Z | 4.91 | 69.6 | 19.3 | | 146.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 2.65 | 68.1 | 18.5 | 1.54 | 135.2 | ±0.5 % |
| | | Y | 3.05 | 70.8 | 19.9 | | 140.7 | |
| | | Z | 2.87 | 69.8 | 19.3 | | 144.8 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.00 | 69.0 | 21.5 | 8.23 | 130.8 | ±2.2 % |
| | | Y | 10.06 | 68.9 | 21.4 | | 138.6 | |
| | | Z | 10.08 | 69.3 | 21.7 | | 141.6 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 8 and 9).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.81 | 6.81 | 6.81 | 0.37 | 1.70 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.51 | 6.51 | 6.51 | 0.45 | 1.52 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.38 | 5.38 | 5.38 | 0.44 | 1.58 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.17 | 5.17 | 5.17 | 0.80 | 1.18 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.56 | 4.56 | 4.56 | 0.80 | 1.21 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.44 | 4.44 | 4.44 | 0.80 | 1.22 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.38 | 6.38 | 6.38 | 0.31 | 1.89 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.32 | 6.32 | 6.32 | 0.55 | 1.39 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 5.03 | 5.03 | 5.03 | 0.57 | 1.44 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.82 | 4.82 | 4.82 | 0.51 | 1.54 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.36 | 4.36 | 4.36 | 0.71 | 1.07 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.22 | 4.22 | 4.22 | 0.80 | 1.07 | ± 12.0 % |


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field

(TEM-Cell:ifi1110 EXX, Waveguide: R22)


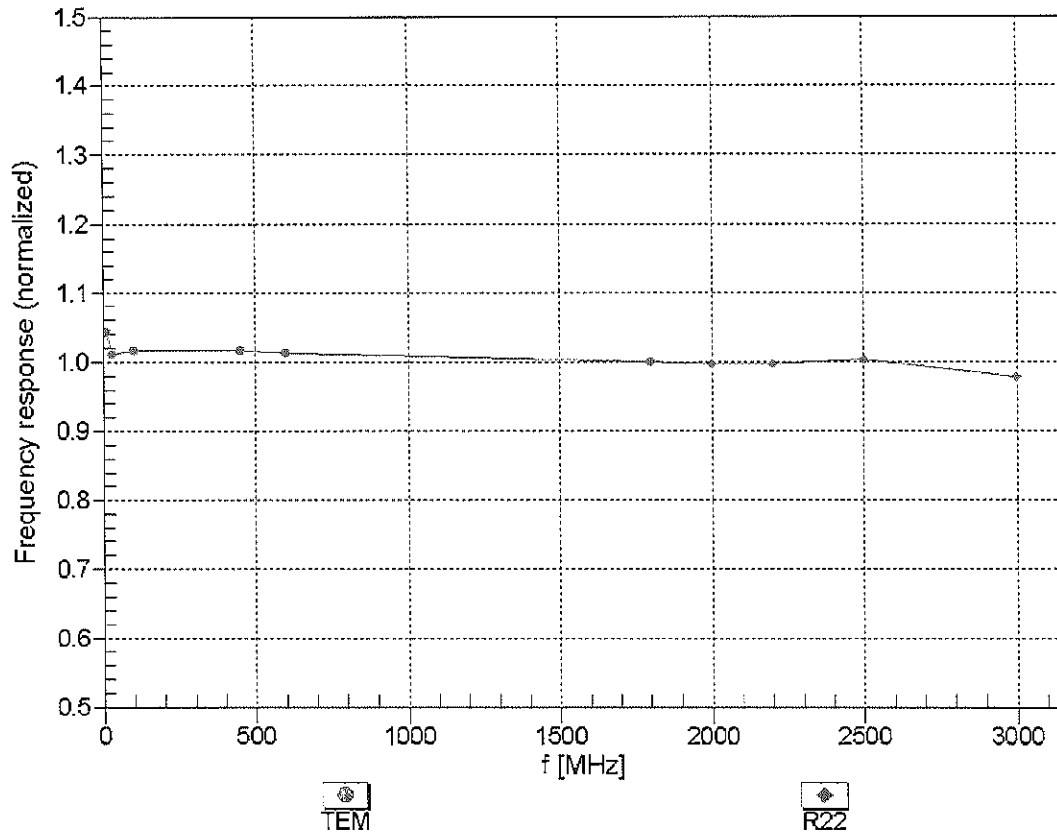


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

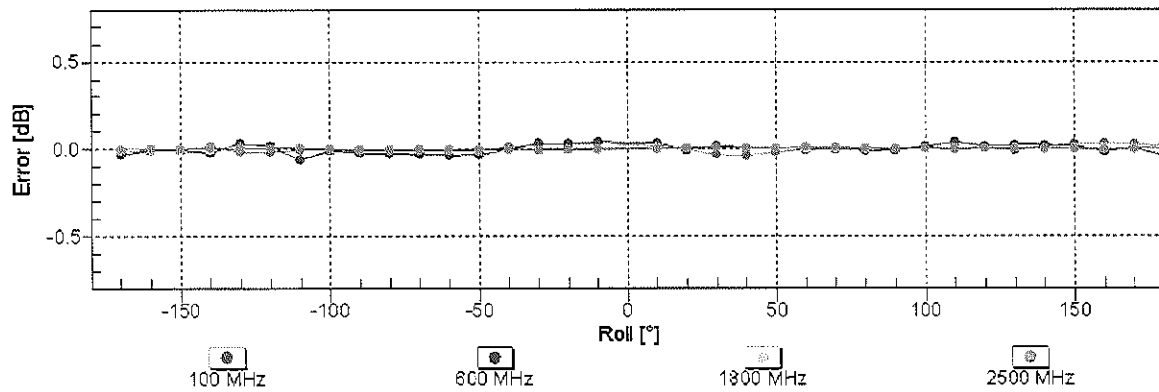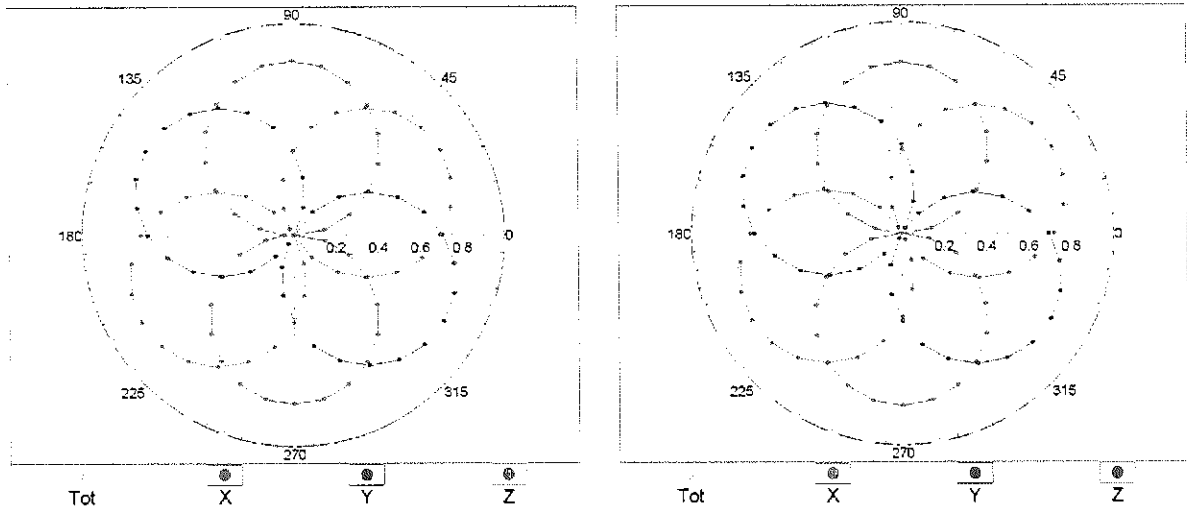


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}}= 1900 \text{ MHz}$)

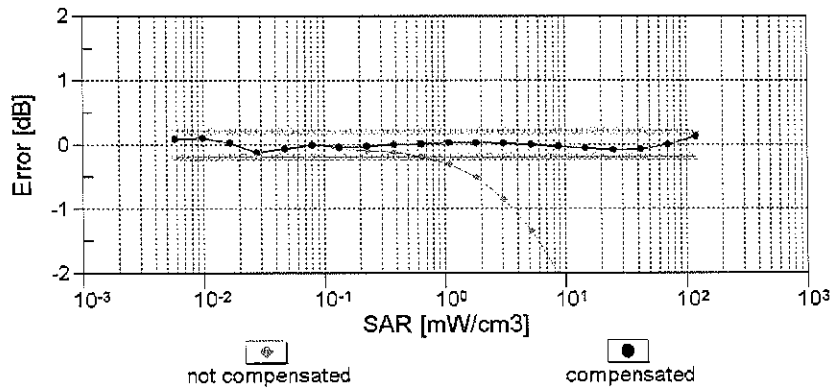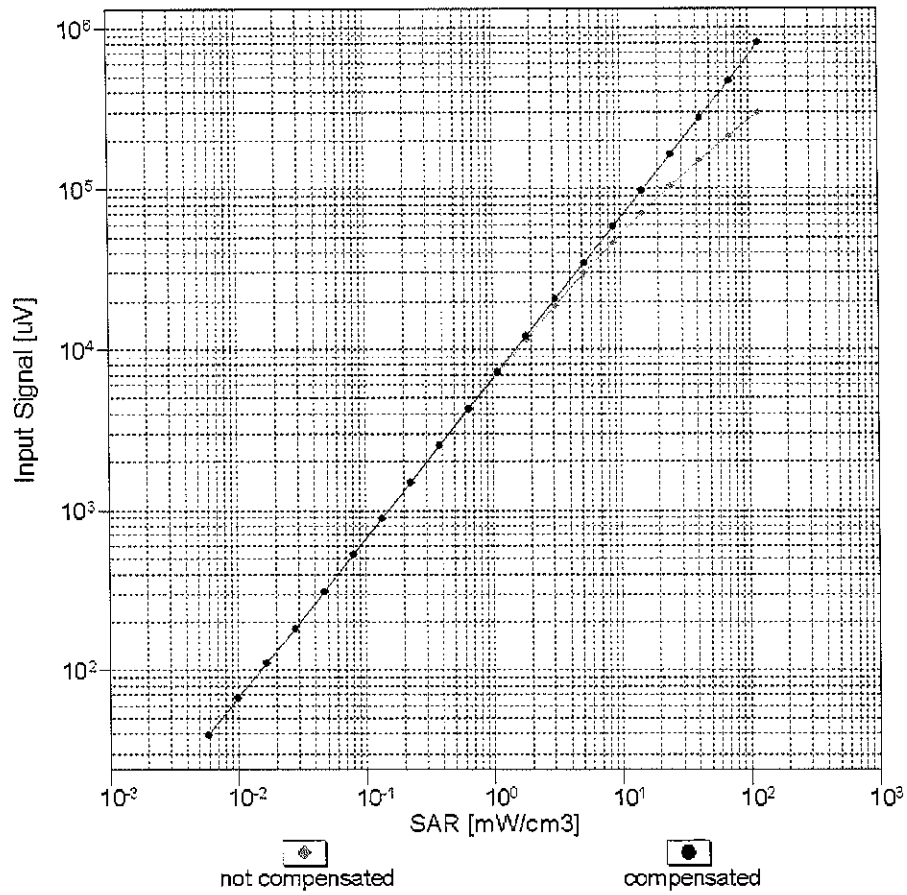



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

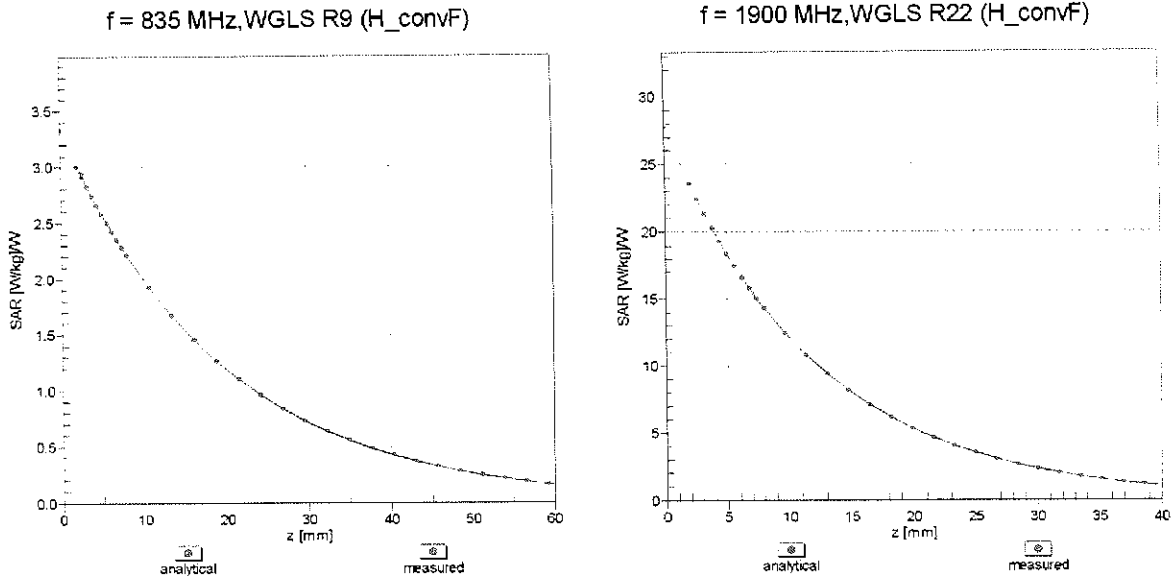

Deviation from Isotropy in Liquid

Error (ϕ, θ), f = 900 MHz

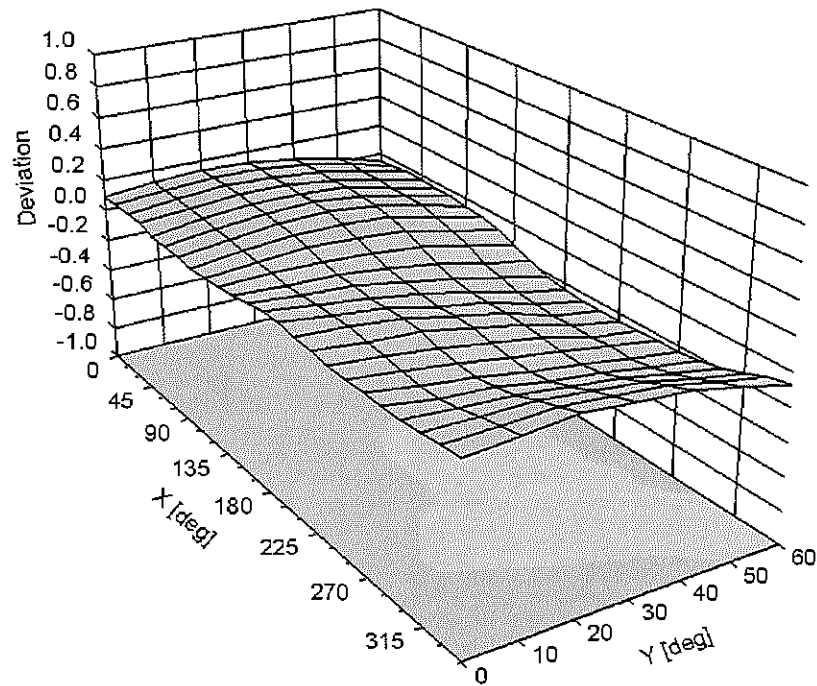

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -110 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3334_Dec14**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3334**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

CC
12/31/14

Calibration date: **December 16, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 789 | 30-Apr-14 (No. DAE4-789_Apr14) | Apr-15 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

| | Name | Function | Signature |
|---|---------------|-----------------------|---------------------------|
| Calibrated by: | Leif Klyssner | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |
| | | | Issued: December 16, 2014 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | Information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical Isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3334

| | |
|---------------|-------------------|
| Manufactured: | January 24, 2012 |
| Repaired: | December 9, 2014 |
| Calibrated: | December 16, 2014 |

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.04 | 1.05 | 1.01 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 106.5 | 105.0 | 105.6 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^F (k=2) |
|-----------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 188.0 | $\pm 3.0 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 183.2 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 181.8 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 4.61 | 67.2 | 13.7 | 10.00 | 38.4 | $\pm 1.4 \%$ |
| | | Y | 20.36 | 82.7 | 18.7 | | 38.0 | |
| | | Z | 17.55 | 80.3 | 17.6 | | 37.0 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 3.56 | 68.4 | 19.1 | 2.91 | 148.4 | $\pm 0.7 \%$ |
| | | Y | 3.44 | 68.1 | 19.2 | | 146.9 | |
| | | Z | 3.52 | 68.3 | 19.1 | | 144.7 | |
| 10012-CAB | IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps) | X | 3.54 | 71.9 | 20.0 | 1.87 | 148.0 | $\pm 0.7 \%$ |
| | | Y | 3.51 | 72.2 | 20.5 | | 148.9 | |
| | | Z | 3.80 | 73.3 | 20.6 | | 144.6 | |
| 10013-CAB | IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.39 | 71.1 | 23.3 | 9.46 | 149.8 | $\pm 3.8 \%$ |
| | | Y | 11.54 | 71.8 | 24.0 | | 149.5 | |
| | | Z | 11.11 | 70.5 | 23.0 | | 141.6 | |
| 10021-DAB | GSM-FDD (TDMA, GMSK) | X | 15.29 | 91.3 | 25.0 | 9.39 | 131.9 | $\pm 1.7 \%$ |
| | | Y | 24.16 | 100.0 | 28.4 | | 142.8 | |
| | | Z | 13.05 | 89.2 | 24.5 | | 126.5 | |
| 10023-DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 16.07 | 91.7 | 25.1 | 9.57 | 144.0 | $\pm 2.2 \%$ |
| | | Y | 19.00 | 95.3 | 26.8 | | 136.4 | |
| | | Z | 13.93 | 89.8 | 24.6 | | 141.0 | |
| 10024-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 19.98 | 91.0 | 22.4 | 6.56 | 134.2 | $\pm 1.9 \%$ |
| | | Y | 34.78 | 99.7 | 25.5 | | 145.0 | |
| | | Z | 29.89 | 96.8 | 24.1 | | 129.8 | |
| 10027-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 56.30 | 99.7 | 22.8 | 4.80 | 125.2 | $\pm 1.9 \%$ |
| | | Y | 41.16 | 99.6 | 23.9 | | 131.2 | |
| | | Z | 50.78 | 99.8 | 23.1 | | 147.6 | |
| 10028-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 49.35 | 99.7 | 22.5 | 3.55 | 133.2 | $\pm 2.2 \%$ |
| | | Y | 46.49 | 99.6 | 22.9 | | 139.2 | |
| | | Z | 58.21 | 99.7 | 22.0 | | 129.4 | |
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 56.54 | 100.0 | 20.2 | 1.16 | 128.0 | $\pm 1.7 \%$ |
| | | Y | 20.03 | 99.3 | 22.4 | | 130.3 | |
| | | Z | 84.01 | 100.0 | 19.4 | | 141.0 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.44 | 67.6 | 19.6 | 5.67 | 138.5 | $\pm 1.4 \%$ |
| | | Y | 6.50 | 67.9 | 20.0 | | 142.1 | |
| | | Z | 6.31 | 67.2 | 19.4 | | 129.4 | |

| | | | | | | | | |
|-----------|--|---|-------|------|------|------|-------|--------|
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 9.77 | 73.6 | 24.6 | 9.29 | 129.6 | ±3.3 % |
| | | Y | 10.52 | 76.0 | 26.3 | | 132.1 | |
| | | Z | 10.21 | 75.0 | 25.4 | | 147.7 | |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.36 | 67.2 | 19.6 | 5.80 | 136.8 | ±1.4 % |
| | | Y | 6.31 | 67.3 | 19.8 | | 137.2 | |
| | | Z | 6.20 | 66.7 | 19.3 | | 128.8 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 9.96 | 68.3 | 20.8 | 8.07 | 126.5 | ±2.5 % |
| | | Y | 10.12 | 68.8 | 21.3 | | 126.6 | |
| | | Z | 10.22 | 69.0 | 21.2 | | 143.7 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 9.29 | 73.0 | 24.4 | 9.28 | 125.3 | ±3.3 % |
| | | Y | 9.65 | 74.5 | 25.6 | | 124.4 | |
| | | Z | 9.65 | 74.3 | 25.2 | | 141.1 | |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.03 | 66.7 | 19.3 | 5.75 | 132.7 | ±1.4 % |
| | | Y | 5.97 | 66.7 | 19.5 | | 132.7 | |
| | | Z | 6.17 | 67.3 | 19.7 | | 148.3 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.47 | 67.2 | 19.5 | 5.82 | 138.1 | ±1.4 % |
| | | Y | 6.44 | 67.3 | 19.8 | | 138.2 | |
| | | Z | 6.27 | 66.6 | 19.2 | | 126.8 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 5.03 | 66.9 | 19.6 | 5.73 | 137.2 | ±1.2 % |
| | | Y | 4.97 | 67.0 | 19.9 | | 135.7 | |
| | | Z | 4.91 | 66.5 | 19.5 | | 127.1 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 8.53 | 77.4 | 26.9 | 9.21 | 142.4 | ±2.7 % |
| | | Y | 9.59 | 81.3 | 29.3 | | 142.3 | |
| | | Z | 7.78 | 75.0 | 25.7 | | 126.7 | |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 5.02 | 67.0 | 19.7 | 5.72 | 131.8 | ±1.2 % |
| | | Y | 4.98 | 67.0 | 19.9 | | 136.1 | |
| | | Z | 4.95 | 66.8 | 19.6 | | 128.1 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.99 | 66.8 | 19.6 | 5.72 | 131.2 | ±1.2 % |
| | | Y | 4.99 | 67.1 | 20.0 | | 136.2 | |
| | | Z | 4.92 | 66.6 | 19.5 | | 127.9 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.98 | 68.8 | 21.2 | 8.10 | 141.7 | ±2.5 % |
| | | Y | 10.14 | 69.5 | 21.8 | | 147.2 | |
| | | Z | 9.85 | 68.6 | 21.1 | | 137.5 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 7.17 | 67.5 | 19.6 | 5.97 | 146.0 | ±1.4 % |
| | | Y | 7.13 | 67.7 | 19.9 | | 149.9 | |
| | | Z | 7.12 | 67.5 | 19.6 | | 142.9 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 8.29 | 76.6 | 26.5 | 9.21 | 136.1 | ±2.7 % |
| | | Y | 9.60 | 81.4 | 29.3 | | 142.3 | |
| | | Z | 7.98 | 75.8 | 26.1 | | 132.9 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 9.27 | 74.1 | 25.1 | 9.24 | 139.1 | ±3.3 % |
| | | Y | 10.25 | 77.5 | 27.4 | | 146.3 | |
| | | Z | 9.07 | 73.7 | 25.0 | | 135.8 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 9.95 | 74.9 | 25.4 | 9.30 | 147.0 | ±3.3 % |
| | | Y | 9.80 | 75.0 | 25.9 | | 125.9 | |
| | | Z | 9.74 | 74.6 | 25.4 | | 143.8 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10275-CAB | UMTS-FDD (HSUPA, Sublest 5, 3GPP Rel8.4) | X | 4.63 | 67.6 | 19.0 | 3.96 | 147.5 | ±0.7 % |
| | | Y | 4.41 | 66.9 | 18.9 | | 129.5 | |
| | | Z | 4.61 | 67.6 | 19.1 | | 148.1 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.83 | 67.7 | 19.0 | 3.46 | 133.7 | ±0.7 % |
| | | Y | 3.71 | 67.4 | 19.0 | | 139.0 | |
| | | Z | 3.86 | 68.1 | 19.2 | | 133.7 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.85 | 68.2 | 19.2 | 3.39 | 136.7 | ±0.5 % |
| | | Y | 3.67 | 67.5 | 19.1 | | 141.3 | |
| | | Z | 3.75 | 67.8 | 19.0 | | 136.2 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.31 | 67.1 | 19.5 | 5.81 | 130.6 | ±1.4 % |
| | | Y | 6.32 | 67.3 | 19.8 | | 135.1 | |
| | | Z | 6.24 | 66.9 | 19.4 | | 129.2 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.85 | 67.5 | 19.8 | 6.06 | 135.1 | ±1.4 % |
| | | Y | 6.90 | 67.9 | 20.2 | | 141.5 | |
| | | Z | 6.82 | 67.5 | 19.8 | | 135.1 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 5.04 | 69.1 | 19.1 | 3.76 | 126.0 | ±0.5 % |
| | | Y | 4.90 | 69.0 | 19.3 | | 129.6 | |
| | | Z | 5.11 | 69.7 | 19.4 | | 125.8 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 5.05 | 69.6 | 19.4 | 3.77 | 147.1 | ±0.7 % |
| | | Y | 4.84 | 69.2 | 19.5 | | 127.8 | |
| | | Z | 5.15 | 70.1 | 19.6 | | 143.3 | |
| 10415-AAA | IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 3.13 | 71.2 | 19.9 | 1.54 | 144.5 | ±0.5 % |
| | | Y | 2.93 | 70.4 | 19.9 | | 149.8 | |
| | | Z | 3.18 | 71.6 | 20.1 | | 141.4 | |
| 10416-AAA | IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.11 | 69.0 | 21.4 | 8.23 | 144.3 | ±2.5 % |
| | | Y | 10.21 | 69.6 | 21.9 | | 148.3 | |
| | | Z | 9.99 | 68.9 | 21.3 | | 141.1 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL. (see Pages 7 and 8).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^f | Conductivity (S/m) ^f | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.51 | 6.51 | 6.51 | 0.80 | 1.17 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.25 | 6.25 | 6.25 | 0.38 | 1.58 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.21 | 5.21 | 5.21 | 0.43 | 1.63 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.03 | 5.03 | 5.03 | 0.53 | 1.45 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.51 | 4.51 | 4.51 | 0.80 | 1.26 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.31 | 4.31 | 4.31 | 0.79 | 1.27 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^c | Relative Permittivity ^f | Conductivity (S/m) ^f | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^d (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.09 | 6.09 | 6.09 | 0.49 | 1.47 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.14 | 6.14 | 6.14 | 0.69 | 1.27 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.94 | 4.94 | 4.94 | 0.80 | 1.24 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.73 | 4.73 | 4.73 | 0.62 | 1.44 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.28 | 4.28 | 4.28 | 0.80 | 1.13 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.16 | 4.16 | 4.16 | 0.75 | 1.25 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


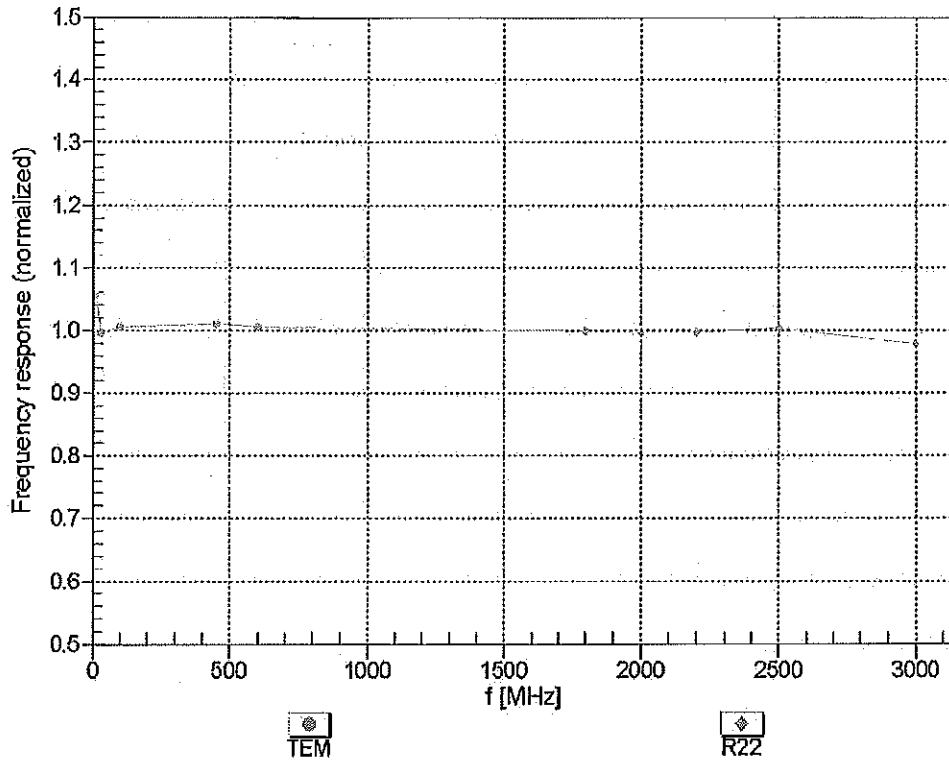


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

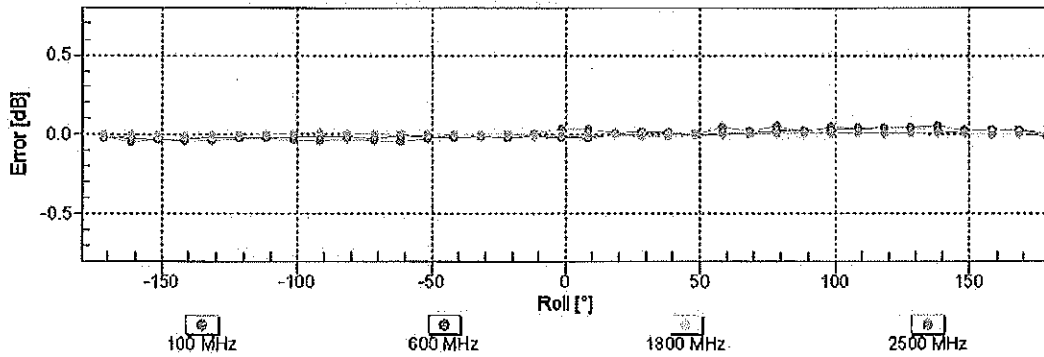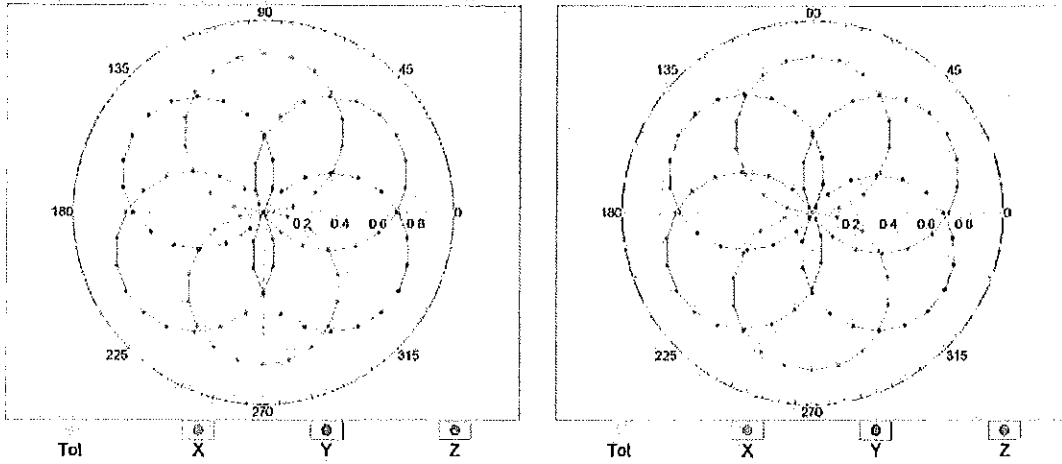


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

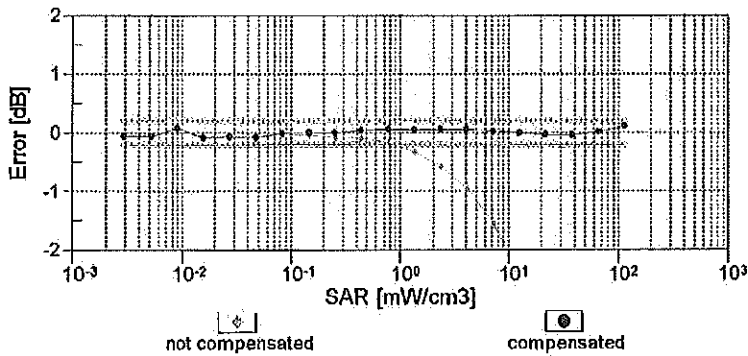
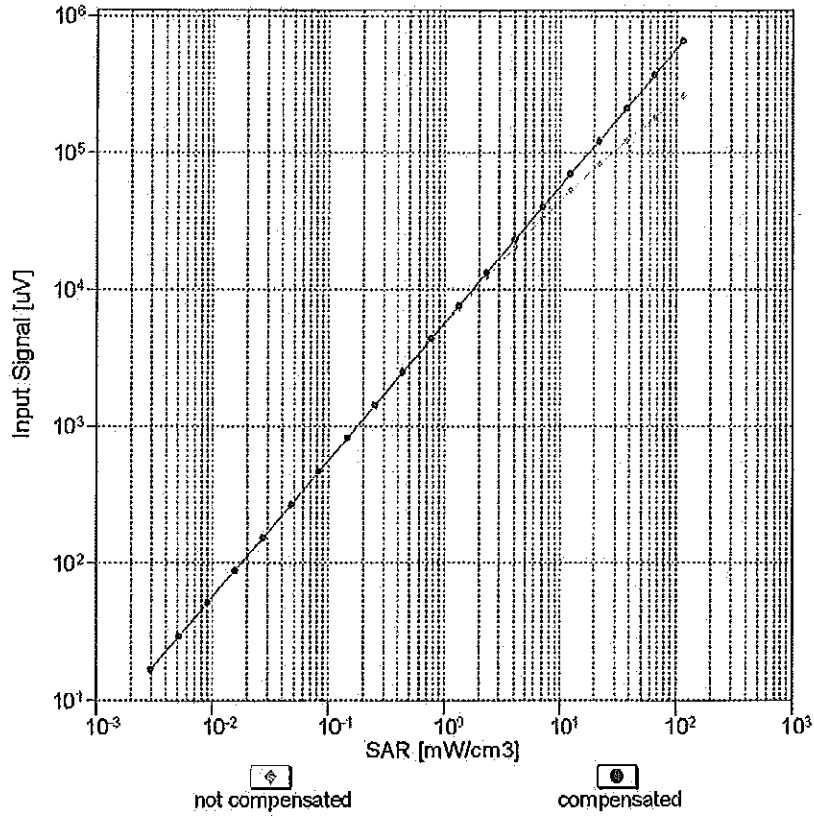


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

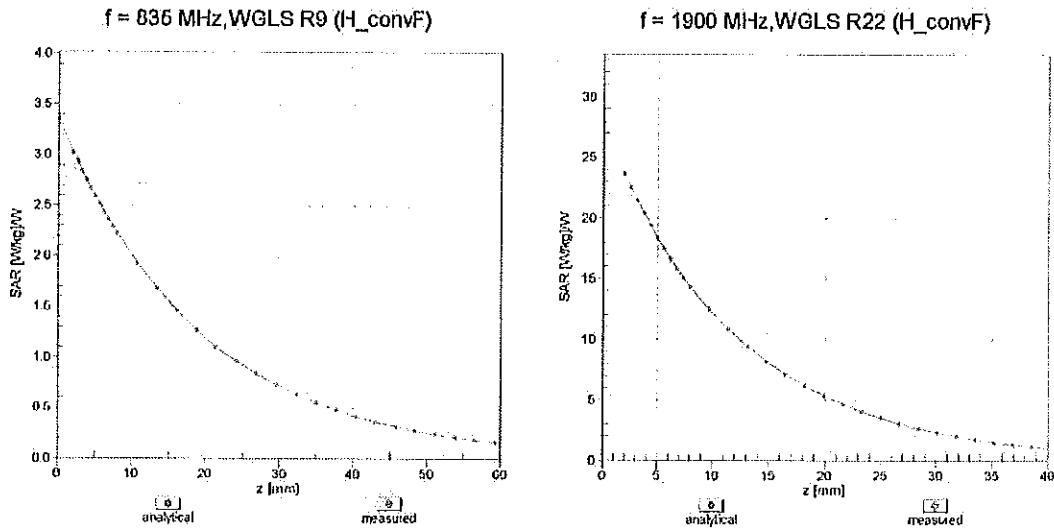

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

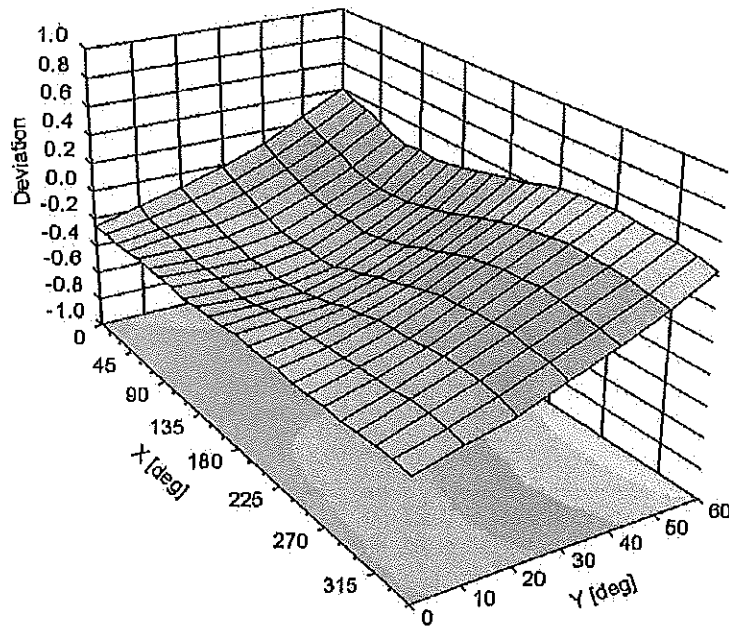

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 18.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3332_Sep14/2**

CALIBRATION CERTIFICATE (Replacement of No: ES3-3332_Sep14)

Object **ES3DV3 - SN:3332**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes CC
12/12/14

Calibration date: **September 18, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | in house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | in house check: Oct-14 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|--------------------------|
| Calibrated by: | Israe El-Naouq | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |
| | | | Issued: November 3, 2014 |

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from Isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3332

Manufactured: January 24, 2012
Calibrated: September 18, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.94 | 1.15 | 0.98 | $\pm 10.1\%$ |
| DCP (mV) ^B | 105.8 | 103.8 | 112.4 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^F (k=2) |
|---------------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 178.7 | $\pm 3.0\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 199.5 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 186.5 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 55.60 | 92.4 | 20.6 | 10.00 | 35.7 | $\pm 1.7\%$ |
| | | Y | 2.80 | 61.2 | 11.6 | | 42.9 | |
| | | Z | 10.49 | 80.1 | 18.0 | | 36.1 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 3.47 | 67.9 | 18.8 | 2.91 | 141.3 | $\pm 0.7\%$ |
| | | Y | 3.29 | 67.0 | 18.4 | | 138.2 | |
| | | Z | 3.78 | 70.4 | 20.1 | | 147.9 | |
| 10012- CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.53 | 72.0 | 20.1 | 1.87 | 141.7 | $\pm 0.7\%$ |
| | | Y | 3.03 | 69.1 | 18.8 | | 141.1 | |
| | | Z | 4.06 | 75.5 | 21.6 | | 148.2 | |
| 10013- CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.87 | 69.8 | 22.6 | 9.46 | 137.3 | $\pm 3.5\%$ |
| | | Y | 11.63 | 71.7 | 23.9 | | 141.9 | |
| | | Z | 10.51 | 69.6 | 22.5 | | 139.2 | |
| 10021- DAB | GSM-FDD (TDMA, GMSK) | X | 6.92 | 78.4 | 20.1 | 9.39 | 137.0 | $\pm 2.5\%$ |
| | | Y | 26.20 | 99.6 | 27.8 | | 141.5 | |
| | | Z | 5.13 | 78.3 | 21.1 | | 144.7 | |
| 10023- DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 9.10 | 83.6 | 22.5 | 9.57 | 144.0 | $\pm 2.5\%$ |
| | | Y | 26.31 | 100.0 | 28.1 | | 136.7 | |
| | | Z | 6.15 | 81.6 | 22.5 | | 139.9 | |
| 10024- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 10.54 | 84.1 | 20.4 | 6.56 | 141.8 | $\pm 2.5\%$ |
| | | Y | 40.55 | 99.6 | 24.9 | | 142.2 | |
| | | Z | 6.45 | 81.5 | 20.2 | | 145.7 | |
| 10027- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 28.34 | 94.6 | 21.9 | 4.80 | 131.4 | $\pm 2.5\%$ |
| | | Y | 52.22 | 99.6 | 23.3 | | 126.8 | |
| | | Z | 28.33 | 99.5 | 23.9 | | 140.7 | |
| 10028- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 52.17 | 100.0 | 22.2 | 3.55 | 147.0 | $\pm 1.7\%$ |
| | | Y | 57.29 | 99.6 | 22.4 | | 133.0 | |
| | | Z | 25.84 | 99.5 | 23.3 | | 126.2 | |
| 10032- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 59.05 | 100.0 | 19.9 | 1.16 | 135.5 | $\pm 1.9\%$ |
| | | Y | 100.00 | 99.7 | 19.2 | | 143.5 | |
| | | Z | 34.97 | 100.0 | 20.4 | | 143.1 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 4.78 | 66.9 | 18.9 | 4.57 | 134.6 | ±0.9 % |
| | | Y | 4.85 | 67.1 | 19.1 | | 141.0 | |
| | | Z | 4.76 | 67.8 | 19.4 | | 140.7 | |
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 3.98 | 66.4 | 18.6 | 3.97 | 130.4 | ±0.7 % |
| | | Y | 3.98 | 66.5 | 18.7 | | 136.2 | |
| | | Z | 4.04 | 67.7 | 19.2 | | 137.4 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 4.75 | 67.3 | 18.8 | 3.98 | 144.4 | ±0.7 % |
| | | Y | 4.55 | 66.5 | 18.5 | | 126.5 | |
| | | Z | 4.72 | 67.9 | 19.0 | | 128.1 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.26 | 66.9 | 19.2 | 5.67 | 124.5 | ±1.2 % |
| | | Y | 6.38 | 67.4 | 19.7 | | 131.7 | |
| | | Z | 6.36 | 67.7 | 19.7 | | 132.3 | |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.44 | 67.5 | 19.7 | 5.80 | 147.4 | ±1.4 % |
| | | Y | 6.31 | 67.2 | 19.7 | | 130.2 | |
| | | Z | 6.17 | 67.2 | 19.6 | | 130.1 | |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 6.08 | 66.9 | 19.5 | 5.75 | 142.7 | ±1.4 % |
| | | Y | 5.97 | 66.6 | 19.4 | | 127.3 | |
| | | Z | 5.84 | 66.7 | 19.3 | | 126.2 | |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.13 | 68.7 | 21.0 | 8.10 | 136.9 | ±2.5 % |
| | | Y | 10.57 | 69.9 | 21.9 | | 146.3 | |
| | | Z | 10.06 | 69.0 | 21.1 | | 143.6 | |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.12 | 68.6 | 21.0 | 8.07 | 138.2 | ±2.5 % |
| | | Y | 10.60 | 69.9 | 21.9 | | 148.0 | |
| | | Z | 10.07 | 69.0 | 21.1 | | 146.6 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 8.76 | 71.7 | 23.8 | 9.28 | 130.7 | ±3.0 % |
| | | Y | 10.03 | 75.2 | 25.9 | | 121.5 | |
| | | Z | 8.15 | 70.7 | 23.5 | | 134.1 | |
| 10164-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.10 | 67.0 | 19.5 | 5.75 | 144.4 | ±1.4 % |
| | | Y | 5.98 | 66.6 | 19.4 | | 127.8 | |
| | | Z | 5.84 | 66.6 | 19.3 | | 127.2 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.56 | 67.5 | 19.7 | 5.82 | 149.5 | ±1.7 % |
| | | Y | 6.41 | 67.1 | 19.6 | | 132.5 | |
| | | Z | 6.17 | 66.8 | 19.4 | | 130.4 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 5.01 | 67.0 | 19.7 | 5.73 | 147.8 | ±1.2 % |
| | | Y | 5.01 | 66.9 | 19.8 | | 132.1 | |
| | | Z | 4.75 | 66.9 | 19.7 | | 130.3 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 7.65 | 75.0 | 25.8 | 9.21 | 144.9 | ±2.7 % |
| | | Y | 10.17 | 82.4 | 29.7 | | 136.4 | |
| | | Z | 6.53 | 72.3 | 24.6 | | 145.6 | |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.98 | 66.9 | 19.6 | 5.72 | 141.0 | ±1.2 % |
| | | Y | 4.98 | 66.7 | 19.7 | | 130.5 | |
| | | Z | 4.71 | 66.7 | 19.5 | | 128.1 | |

| | | | | | | | | |
|-----------|--|---|-------|------|------|------|-------|--------|
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.95 | 66.7 | 19.5 | 5.72 | 139.8 | ±1.2 % |
| | | Y | 4.97 | 66.7 | 19.7 | | 129.5 | |
| | | Z | 4.72 | 66.8 | 19.6 | | 128.0 | |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 9.75 | 68.2 | 20.9 | 8.09 | 131.8 | ±2.5 % |
| | | Y | 10.16 | 69.4 | 21.7 | | 139.2 | |
| | | Z | 9.62 | 68.6 | 21.0 | | 137.3 | |
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.77 | 68.3 | 20.9 | 8.10 | 133.6 | ±2.5 % |
| | | Y | 10.17 | 69.4 | 21.8 | | 140.1 | |
| | | Z | 9.61 | 68.5 | 21.0 | | 140.1 | |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 9.69 | 68.3 | 20.9 | 8.03 | 133.6 | ±2.5 % |
| | | Y | 10.05 | 69.3 | 21.7 | | 139.2 | |
| | | Z | 9.58 | 68.7 | 21.1 | | 139.4 | |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 10.13 | 68.7 | 21.0 | 8.06 | 140.7 | ±2.5 % |
| | | Y | 10.61 | 69.8 | 21.8 | | 145.1 | |
| | | Z | 10.11 | 69.1 | 21.2 | | 148.4 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 7.03 | 67.2 | 19.4 | 5.97 | 138.0 | ±1.4 % |
| | | Y | 7.07 | 67.2 | 19.6 | | 140.2 | |
| | | Z | 6.97 | 67.8 | 19.7 | | 144.6 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 7.11 | 72.9 | 24.7 | 9.21 | 124.6 | ±2.7 % |
| | | Y | 10.04 | 82.0 | 29.5 | | 135.7 | |
| | | Z | 6.29 | 71.2 | 24.0 | | 126.2 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 8.61 | 72.5 | 24.3 | 9.24 | 145.2 | ±3.3 % |
| | | Y | 10.53 | 77.8 | 27.4 | | 136.7 | |
| | | Z | 7.56 | 70.0 | 23.1 | | 126.7 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 8.74 | 71.6 | 23.8 | 9.30 | 128.7 | ±3.3 % |
| | | Y | 11.51 | 79.1 | 28.0 | | 147.2 | |
| | | Z | 8.07 | 70.4 | 23.2 | | 134.1 | |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 5.90 | 66.7 | 18.7 | 4.87 | 128.0 | ±0.9 % |
| | | Y | 5.93 | 66.8 | 18.9 | | 134.5 | |
| | | Z | 5.92 | 67.6 | 19.1 | | 138.2 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.53 | 67.1 | 18.8 | 3.96 | 133.8 | ±0.7 % |
| | | Y | 4.48 | 67.0 | 18.8 | | 139.6 | |
| | | Z | 4.62 | 68.3 | 19.3 | | 145.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.82 | 67.8 | 19.0 | 3.46 | 147.6 | ±0.7 % |
| | | Y | 3.66 | 67.0 | 18.8 | | 131.7 | |
| | | Z | 3.97 | 69.6 | 20.0 | | 135.9 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.70 | 67.5 | 18.8 | 3.39 | 128.1 | ±0.7 % |
| | | Y | 3.60 | 66.9 | 18.7 | | 132.5 | |
| | | Z | 3.80 | 68.9 | 19.5 | | 139.8 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.47 | 67.6 | 19.8 | 5.81 | 149.7 | ±1.7 % |
| | | Y | 6.24 | 66.9 | 19.5 | | 126.3 | |
| | | Z | 6.20 | 67.3 | 19.6 | | 130.9 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.72 | 67.1 | 19.5 | 6.06 | 128.8 | ±1.4 % |
| | | Y | 6.85 | 67.7 | 20.0 | | 132.4 | |
| | | Z | 6.75 | 67.7 | 19.8 | | 136.6 | |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 3.27 | 71.1 | 19.8 | 1.71 | 140.1 | ±0.7 % |
| | | Y | 2.95 | 69.4 | 19.1 | | 139.8 | |
| | | Z | 3.75 | 74.4 | 21.2 | | 146.9 | |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.04 | 68.7 | 21.3 | 8.36 | 136.3 | ±2.5 % |
| | | Y | 10.42 | 69.8 | 22.1 | | 138.1 | |
| | | Z | 9.84 | 68.9 | 21.3 | | 139.7 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 5.01 | 69.3 | 19.2 | 3.76 | 144.3 | ±0.7 % |
| | | Y | 4.79 | 68.1 | 18.7 | | 146.3 | |
| | | Z | 5.40 | 72.5 | 20.8 | | 146.7 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.97 | 69.5 | 19.3 | 3.77 | 141.3 | ±0.7 % |
| | | Y | 4.72 | 68.2 | 18.8 | | 143.1 | |
| | | Z | 5.12 | 71.8 | 20.5 | | 144.4 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 3.05 | 70.5 | 19.5 | 1.54 | 139.7 | ±0.7 % |
| | | Y | 2.71 | 68.7 | 18.9 | | 140.2 | |
| | | Z | 4.22 | 77.3 | 22.5 | | 145.9 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.92 | 68.6 | 21.1 | 8.23 | 136.3 | ±2.5 % |
| | | Y | 10.20 | 69.4 | 21.8 | | 138.3 | |
| | | Z | 9.76 | 68.8 | 21.3 | | 138.9 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 8 and 9).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.56 | 6.56 | 6.56 | 0.50 | 1.43 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.31 | 6.31 | 6.31 | 0.61 | 1.31 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.17 | 5.17 | 5.17 | 0.62 | 1.33 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.04 | 5.04 | 5.04 | 0.80 | 1.17 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.49 | 4.49 | 4.49 | 0.77 | 1.24 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.35 | 4.35 | 4.35 | 0.73 | 1.38 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.24 | 6.24 | 6.24 | 0.50 | 1.50 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.21 | 6.21 | 6.21 | 0.45 | 1.59 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.88 | 4.88 | 4.88 | 0.39 | 1.78 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.64 | 4.64 | 4.64 | 0.61 | 1.47 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.31 | 4.31 | 4.31 | 0.80 | 1.18 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.11 | 4.11 | 4.11 | 0.68 | 0.99 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe lip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


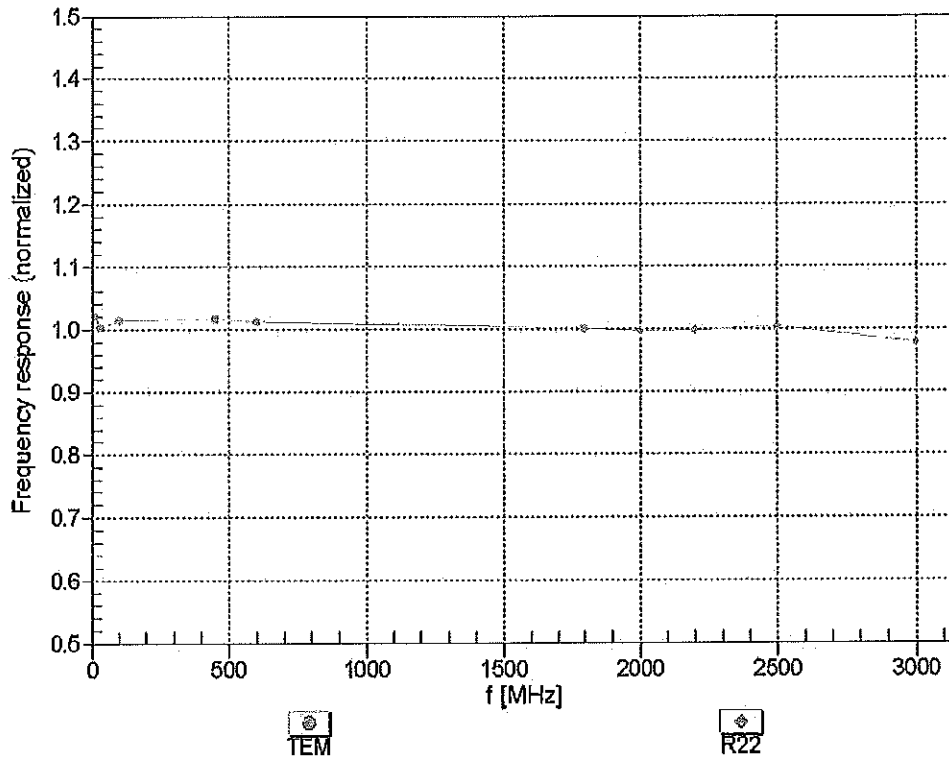


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

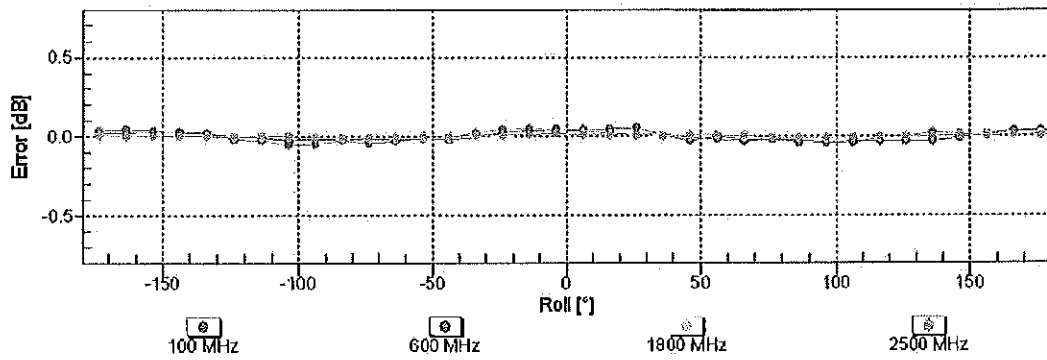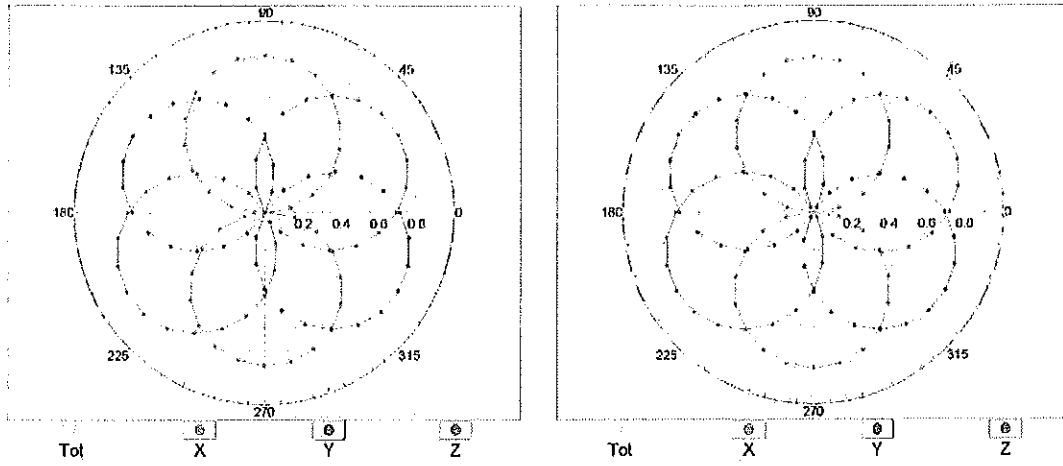


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{eval} = 1900$ MHz)

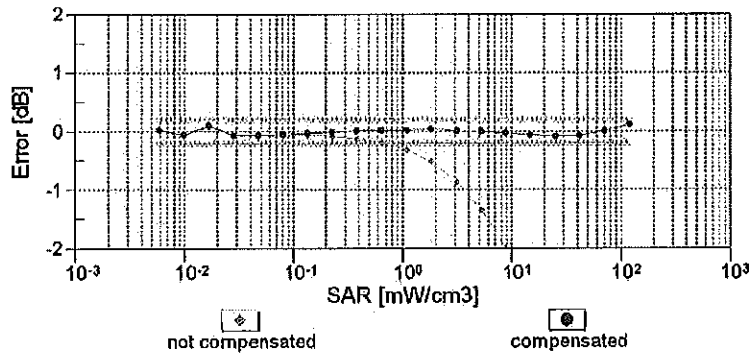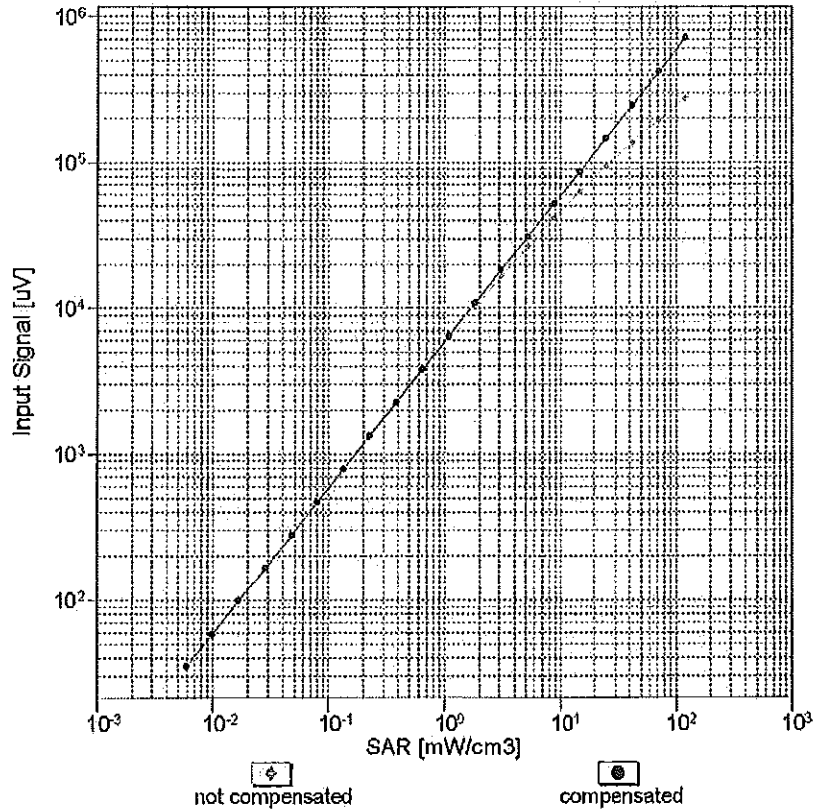


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

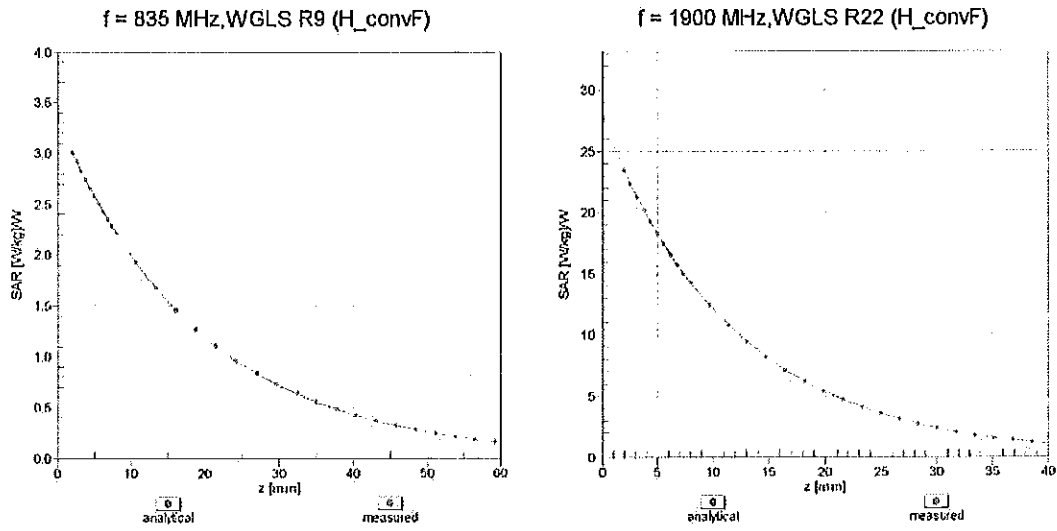

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

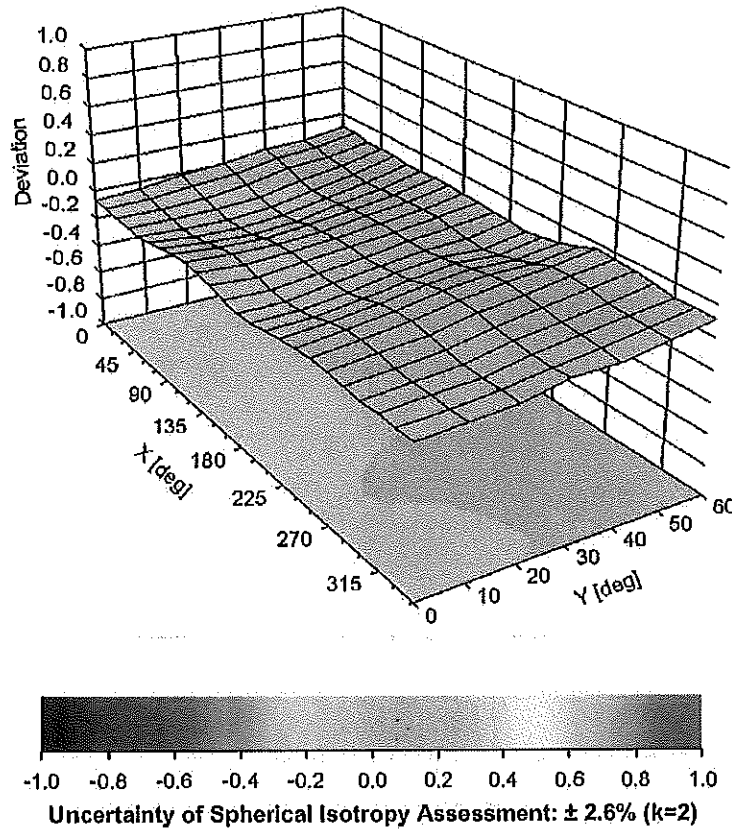

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -3.7 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3209_Mar15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3209**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 19, 2015**

BW ✓
3/26

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-14 (No. ES3-3013_Dec14) | Dec-15 |
| DAE4 | SN: 660 | 14-Jan-15 (No. DAE4-660_Jan15) | Jan-16 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

| | | | |
|----------------|------------------------------|--|---------------|
| Calibrated by: | Name Israe Elnaouq | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | |

Issued: March 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*: *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

Probe ES3DV3

SN:3209

Manufactured: October 14, 2008
Calibrated: March 19, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.35 | 1.33 | 1.14 | $\pm 10.1\%$ |
| DCP (mV) ^B | 102.0 | 100.9 | 103.3 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 214.5 | $\pm 3.5\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 192.6 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 199.1 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.61 | 65.1 | 12.2 | 10.00 | 42.3 | $\pm 1.7\%$ |
| | | Y | 1.39 | 57.8 | 8.9 | | 42.7 | |
| | | Z | 4.57 | 70.3 | 14.0 | | 38.3 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 3.12 | 66.3 | 18.1 | 2.91 | 130.3 | $\pm 0.7\%$ |
| | | Y | 3.08 | 65.6 | 17.5 | | 132.2 | |
| | | Z | 3.32 | 67.7 | 19.0 | | 137.6 | |
| 10012-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 2.54 | 66.8 | 17.8 | 1.87 | 131.1 | $\pm 0.7\%$ |
| | | Y | 2.67 | 67.1 | 17.7 | | 131.6 | |
| | | Z | 2.85 | 69.2 | 19.1 | | 138.0 | |
| 10013-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.78 | 70.5 | 23.4 | 9.46 | 146.9 | $\pm 2.7\%$ |
| | | Y | 10.39 | 69.2 | 22.5 | | 123.5 | |
| | | Z | 10.50 | 69.9 | 23.1 | | 128.4 | |
| 10021-DAB | GSM-FDD (TDMA, GMSK) | X | 3.65 | 74.2 | 17.7 | 9.39 | 130.0 | $\pm 1.9\%$ |
| | | Y | 6.62 | 83.5 | 22.0 | | 149.4 | |
| | | Z | 4.25 | 76.8 | 19.2 | | 136.2 | |
| 10023-DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 3.95 | 75.3 | 18.4 | 9.57 | 138.8 | $\pm 2.5\%$ |
| | | Y | 4.99 | 78.2 | 19.8 | | 143.3 | |
| | | Z | 4.11 | 75.8 | 18.9 | | 129.3 | |
| 10024-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 6.44 | 80.3 | 17.7 | 6.56 | 135.0 | $\pm 1.7\%$ |
| | | Y | 3.76 | 73.7 | 16.0 | | 144.2 | |
| | | Z | 11.61 | 88.5 | 20.7 | | 148.0 | |
| 10027-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 43.77 | 99.9 | 21.8 | 4.80 | 131.8 | $\pm 1.7\%$ |
| | | Y | 13.95 | 87.5 | 19.0 | | 142.7 | |
| | | Z | 39.96 | 99.9 | 22.1 | | 145.6 | |
| 10028-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 62.88 | 99.8 | 20.4 | 3.55 | 144.5 | $\pm 2.2\%$ |
| | | Y | 2.45 | 70.4 | 12.9 | | 130.3 | |
| | | Z | 80.83 | 99.9 | 19.9 | | 135.1 | |
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 0.32 | 58.4 | 4.3 | 1.16 | 144.1 | $\pm 1.9\%$ |
| | | Y | 16.25 | 79.9 | 12.1 | | 129.5 | |
| | | Z | 95.90 | 91.1 | 14.4 | | 134.6 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.32 | 67.4 | 19.8 | 5.67 | 138.3 | $\pm 1.4\%$ |
| | | Y | 6.35 | 67.3 | 19.5 | | 144.4 | |
| | | Z | 6.20 | 67.1 | 19.6 | | 127.7 | |

| | | | | | | | | |
|-----------|--|---|-------|------|------|------|-------|--------|
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 8.72 | 73.1 | 25.3 | 9.29 | 138.6 | ±2.7 % |
| | | Y | 8.88 | 72.9 | 24.9 | | 147.9 | |
| | | Z | 8.48 | 72.3 | 24.9 | | 127.4 | |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.14 | 66.9 | 19.6 | 5.80 | 136.2 | ±1.7 % |
| | | Y | 6.20 | 66.8 | 19.4 | | 142.8 | |
| | | Z | 6.10 | 66.8 | 19.6 | | 126.2 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.05 | 68.9 | 21.4 | 8.07 | 126.8 | ±2.2 % |
| | | Y | 9.98 | 68.5 | 21.1 | | 132.4 | |
| | | Z | 10.23 | 69.4 | 21.7 | | 140.4 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 8.16 | 72.2 | 25.0 | 9.28 | 133.6 | ±2.7 % |
| | | Y | 8.33 | 72.0 | 24.5 | | 142.6 | |
| | | Z | 8.40 | 73.1 | 25.6 | | 147.5 | |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 5.83 | 66.5 | 19.4 | 5.75 | 133.1 | ±1.4 % |
| | | Y | 5.89 | 66.3 | 19.2 | | 139.3 | |
| | | Z | 6.00 | 67.2 | 19.9 | | 146.5 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.26 | 66.9 | 19.6 | 5.82 | 138.8 | ±1.7 % |
| | | Y | 6.34 | 67.0 | 19.5 | | 145.1 | |
| | | Z | 6.22 | 66.9 | 19.7 | | 128.8 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.77 | 66.7 | 19.8 | 5.73 | 135.9 | ±1.4 % |
| | | Y | 4.89 | 66.6 | 19.5 | | 141.8 | |
| | | Z | 4.85 | 66.8 | 19.9 | | 128.3 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 6.77 | 75.0 | 26.9 | 9.21 | 144.2 | ±2.5 % |
| | | Y | 6.56 | 72.6 | 25.2 | | 131.1 | |
| | | Z | 6.68 | 74.0 | 26.4 | | 137.1 | |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.80 | 66.9 | 19.9 | 5.72 | 135.2 | ±1.4 % |
| | | Y | 4.87 | 66.5 | 19.5 | | 140.6 | |
| | | Z | 5.03 | 67.7 | 20.4 | | 149.4 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.77 | 66.7 | 19.8 | 5.72 | 134.7 | ±1.2 % |
| | | Y | 4.88 | 66.5 | 19.5 | | 140.6 | |
| | | Z | 4.84 | 66.8 | 19.9 | | 127.8 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.97 | 69.5 | 21.9 | 8.10 | 145.2 | ±2.2 % |
| | | Y | 9.60 | 68.2 | 21.0 | | 125.1 | |
| | | Z | 9.80 | 69.1 | 21.7 | | 133.9 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 6.95 | 67.5 | 19.8 | 5.97 | 147.3 | ±1.4 % |
| | | Y | 6.73 | 66.4 | 19.1 | | 128.7 | |
| | | Z | 6.89 | 67.4 | 19.8 | | 137.2 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 6.85 | 75.4 | 27.2 | 9.21 | 146.0 | ±2.5 % |
| | | Y | 6.54 | 72.5 | 25.1 | | 131.6 | |
| | | Z | 6.76 | 74.4 | 26.6 | | 138.2 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 7.58 | 71.3 | 24.6 | 9.24 | 126.6 | ±2.5 % |
| | | Y | 7.73 | 71.1 | 24.2 | | 133.3 | |
| | | Z | 7.82 | 72.4 | 25.3 | | 139.0 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 8.18 | 72.2 | 25.1 | 9.30 | 133.6 | ±2.7 % |
| | | Y | 8.35 | 72.0 | 24.6 | | 141.1 | |
| | | Z | 8.42 | 73.2 | 25.6 | | 147.0 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.22 | 66.1 | 18.4 | 3.96 | 128.8 | ±0.9 % |
| | | Y | 4.24 | 65.9 | 18.1 | | 133.8 | |
| | | Z | 4.39 | 67.1 | 19.0 | | 141.7 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.51 | 66.7 | 18.6 | 3.46 | 140.9 | ±0.7 % |
| | | Y | 3.52 | 66.2 | 18.1 | | 143.4 | |
| | | Z | 3.58 | 67.2 | 19.0 | | 131.7 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.45 | 66.7 | 18.5 | 3.39 | 142.0 | ±0.7 % |
| | | Y | 3.50 | 66.4 | 18.2 | | 146.9 | |
| | | Z | 3.61 | 67.8 | 19.3 | | 132.2 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.15 | 66.9 | 19.6 | 5.81 | 136.3 | ±1.4 % |
| | | Y | 6.20 | 66.8 | 19.4 | | 140.3 | |
| | | Z | 6.11 | 66.8 | 19.6 | | 126.6 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.80 | 67.8 | 20.1 | 6.06 | 143.2 | ±1.7 % |
| | | Y | 6.80 | 67.5 | 19.9 | | 147.4 | |
| | | Z | 6.71 | 67.6 | 20.1 | | 131.9 | |
| 10400-AAB | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 10.31 | 70.0 | 22.4 | 8.37 | 147.9 | ±3.0 % |
| | | Y | 9.88 | 68.5 | 21.3 | | 127.2 | |
| | | Z | 10.13 | 69.5 | 22.1 | | 135.8 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 4.60 | 68.6 | 18.9 | 3.76 | 128.2 | ±0.5 % |
| | | Y | 4.58 | 67.9 | 18.4 | | 134.2 | |
| | | Z | 4.86 | 69.6 | 19.5 | | 142.6 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.57 | 68.9 | 19.1 | 3.77 | 149.7 | ±0.5 % |
| | | Y | 4.51 | 68.0 | 18.5 | | 132.3 | |
| | | Z | 4.78 | 69.6 | 19.5 | | 140.3 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 2.47 | 67.0 | 17.9 | 1.54 | 128.1 | ±0.7 % |
| | | Y | 2.46 | 66.4 | 17.4 | | 132.5 | |
| | | Z | 2.72 | 69.1 | 19.2 | | 140.6 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.12 | 69.7 | 22.1 | 8.23 | 146.8 | ±2.7 % |
| | | Y | 9.66 | 68.2 | 21.1 | | 125.0 | |
| | | Z | 9.91 | 69.2 | 21.8 | | 134.3 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 7 and 8).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.34 | 6.34 | 6.34 | 0.29 | 2.02 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.04 | 6.04 | 6.04 | 0.23 | 2.57 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.23 | 5.23 | 5.23 | 0.80 | 1.08 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.05 | 5.05 | 5.05 | 0.10 | 2.40 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 4.76 | 4.76 | 4.76 | 0.70 | 1.27 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.53 | 4.53 | 4.53 | 0.80 | 1.22 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.36 | 4.36 | 4.36 | 0.75 | 1.31 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.12 | 6.12 | 6.12 | 0.34 | 1.81 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.07 | 6.07 | 6.07 | 0.37 | 1.79 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.86 | 4.86 | 4.86 | 0.67 | 1.43 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.57 | 4.57 | 4.57 | 0.57 | 1.53 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 4.28 | 4.28 | 4.28 | 0.80 | 1.19 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.12 | 4.12 | 4.12 | 0.72 | 1.15 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 3.92 | 3.92 | 3.92 | 0.80 | 1.10 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

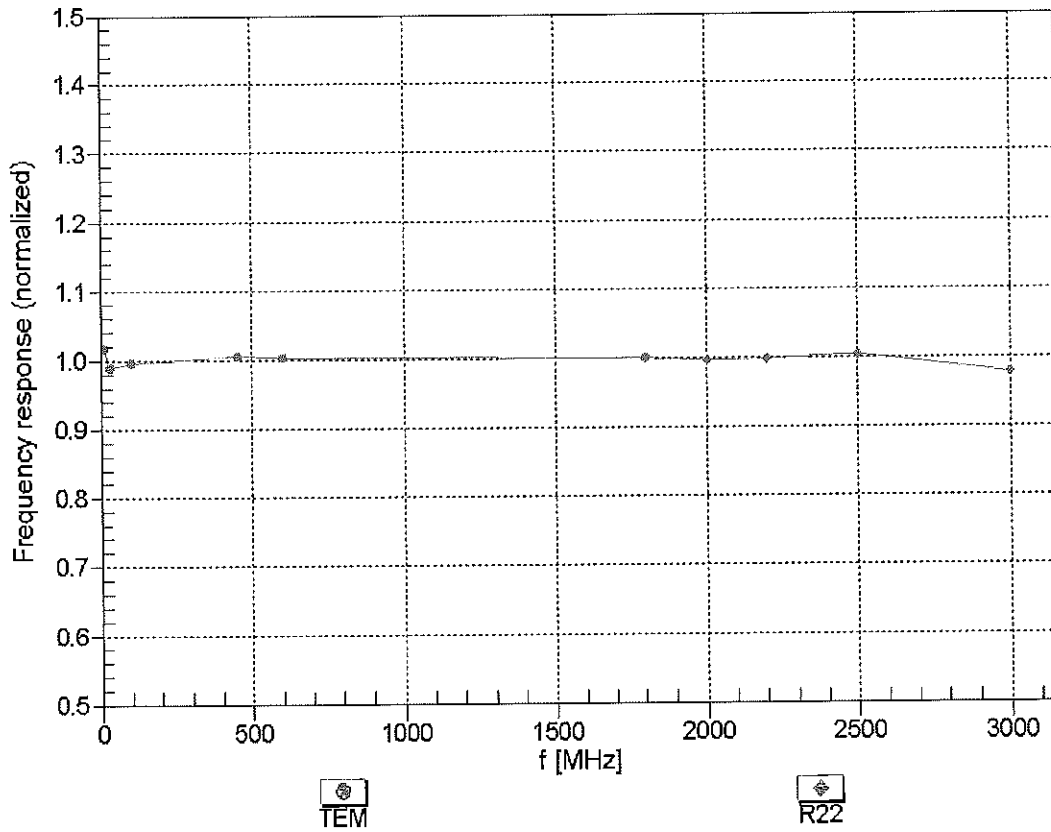



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


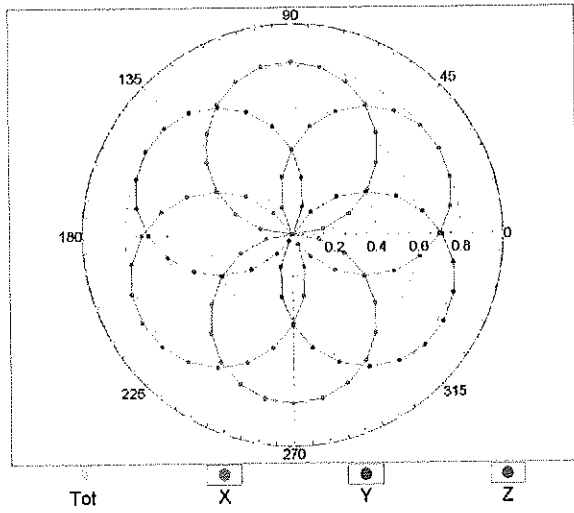


f=1800 MHz, R22

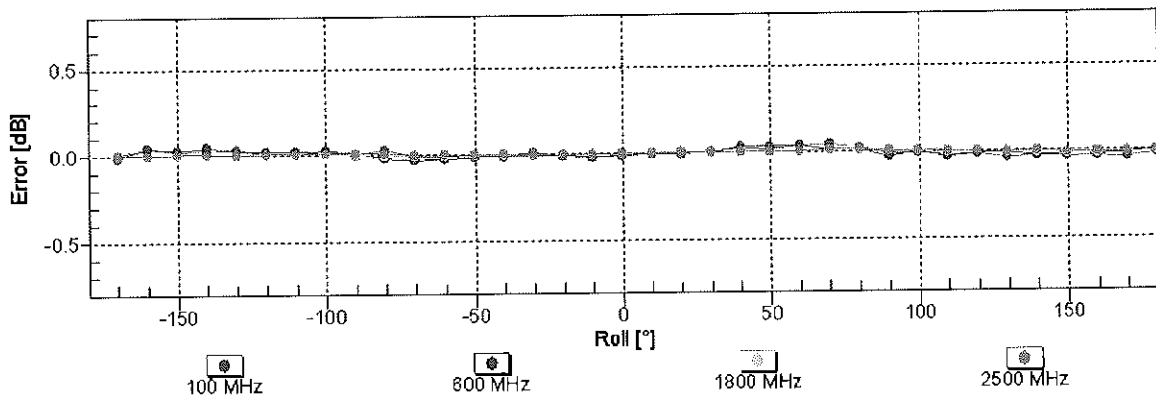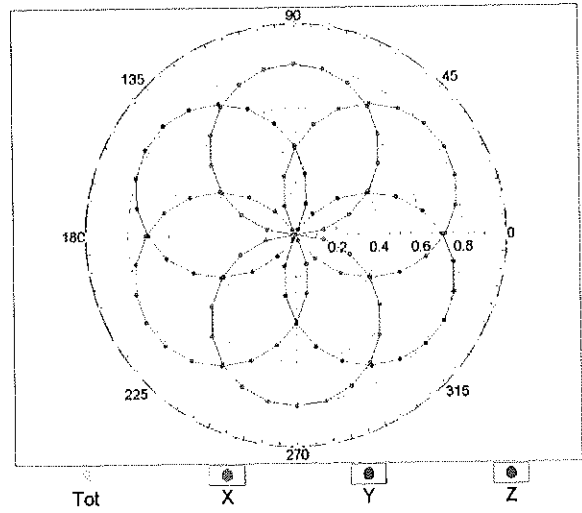

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)


Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

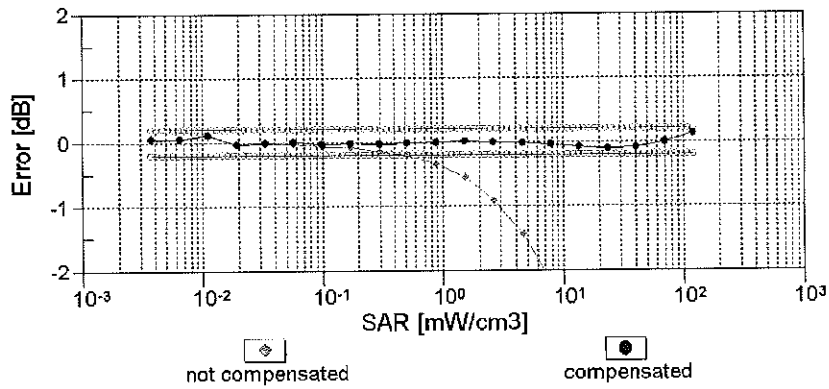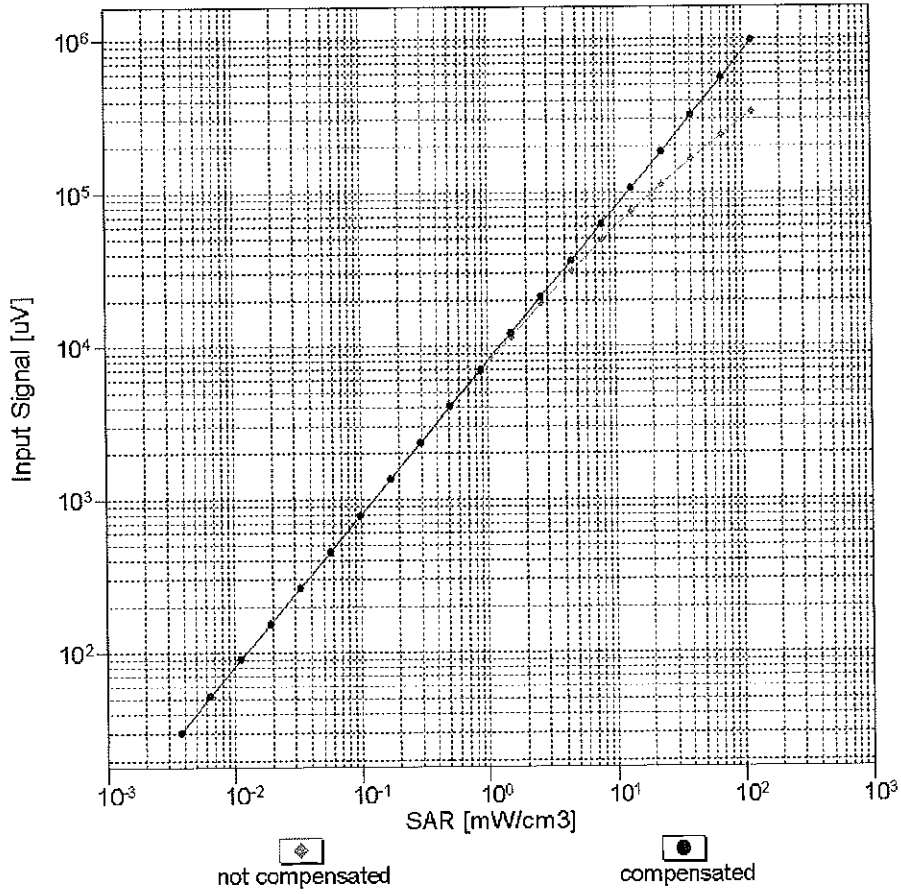


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment



f = 835 MHz, WGLS R9 (H_convF)

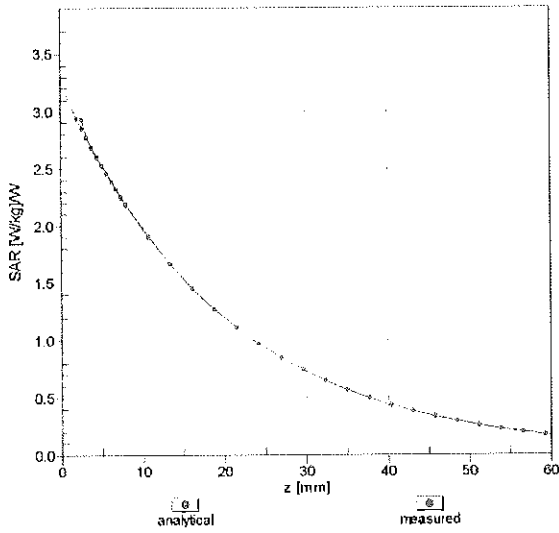

f = 1900 MHz, WGLS R22 (H_convF)

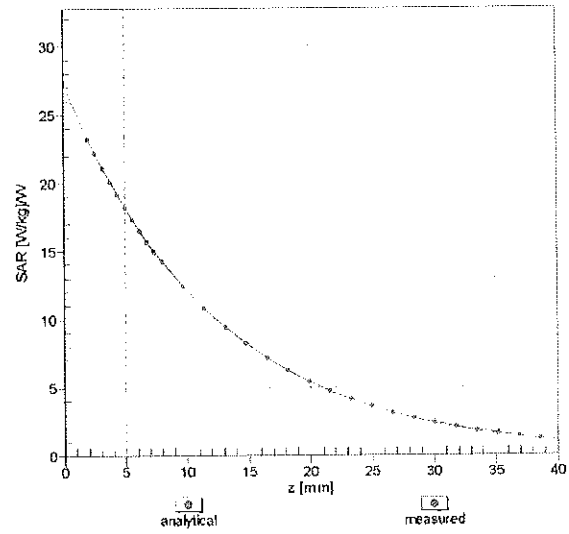

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

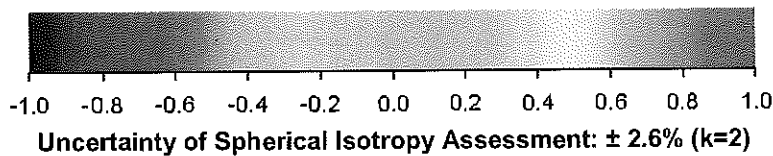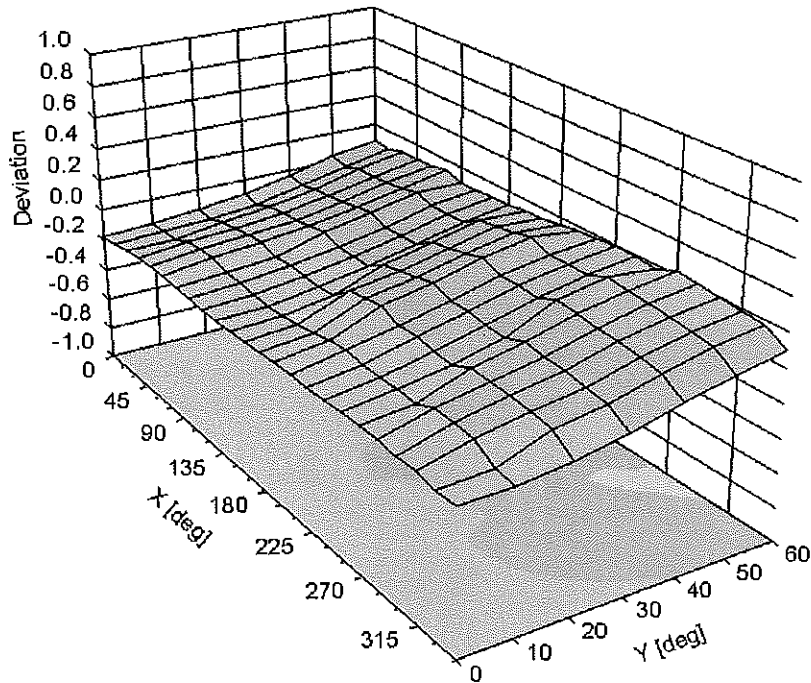

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -40.3 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3318_Jan15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3318**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

CC
1/30/15

Calibration date: **January 23, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-14 (No. ES3-3013_Dec14) | Dec-15 |
| DAE4 | SN: 660 | 14-Jan-15 (No. DAE4-660_Jan15) | Jan-16 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

| | | | |
|----------------|------------------------------|--|---------------|
| Calibrated by: | Name Israe Elnaouq | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature |

Issued: January 26, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-----------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., θ = 0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*; *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

Probe ES3DV3

SN:3318

Manufactured: January 10, 2012
Calibrated: January 23, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.15 | 0.92 | 1.28 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 106.4 | 109.2 | 103.4 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|---------------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 200.6 | $\pm 3.5 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 185.3 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 207.7 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 3.26 | 66.4 | 14.0 | 10.00 | 41.4 | $\pm 1.2 \%$ |
| | | Y | 1.76 | 59.6 | 9.8 | | 36.1 | |
| | | Z | 1.82 | 57.7 | 9.6 | | 43.6 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 3.48 | 68.9 | 19.9 | 2.91 | 120.2 | $\pm 0.5 \%$ |
| | | Y | 3.76 | 70.1 | 19.9 | | 146.0 | |
| | | Z | 3.11 | 66.0 | 17.9 | | 124.4 | |
| 10012- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.71 | 74.2 | 21.7 | 1.87 | 121.7 | $\pm 0.7 \%$ |
| | | Y | 3.65 | 73.3 | 20.7 | | 147.5 | |
| | | Z | 2.77 | 67.4 | 17.8 | | 126.6 | |
| 10013- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.68 | 69.5 | 22.7 | 9.46 | 114.7 | $\pm 2.5 \%$ |
| | | Y | 10.82 | 70.4 | 23.0 | | 139.8 | |
| | | Z | 11.22 | 71.1 | 23.7 | | 122.2 | |
| 10021- DAB | GSM-FDD (TDMA, GMSK) | X | 16.13 | 95.0 | 26.6 | 9.39 | 122.7 | $\pm 2.2 \%$ |
| | | Y | 4.61 | 73.1 | 17.2 | | 130.8 | |
| | | Z | 15.10 | 92.0 | 25.4 | | 135.9 | |
| 10023- DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 17.03 | 96.8 | 27.5 | 9.57 | 113.0 | $\pm 1.9 \%$ |
| | | Y | 4.15 | 71.7 | 16.8 | | 119.9 | |
| | | Z | 21.50 | 98.0 | 27.5 | | 130.9 | |
| 10024- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 35.51 | 99.5 | 24.5 | 6.56 | 147.6 | $\pm 2.7 \%$ |
| | | Y | 6.12 | 77.2 | 17.1 | | 118.1 | |
| | | Z | 38.50 | 99.7 | 24.7 | | 114.0 | |
| 10027- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 45.57 | 99.9 | 23.2 | 4.80 | 113.3 | $\pm 1.7 \%$ |
| | | Y | 2.73 | 68.4 | 12.6 | | 133.3 | |
| | | Z | 54.59 | 99.9 | 22.9 | | 131.0 | |
| 10028- DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 53.68 | 99.5 | 21.9 | 3.55 | 123.0 | $\pm 3.0 \%$ |
| | | Y | 60.05 | 99.8 | 21.1 | | 144.9 | |
| | | Z | 66.60 | 99.6 | 21.6 | | 140.7 | |
| 10032- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 20.92 | 99.4 | 21.8 | 1.16 | 136.6 | $\pm 2.2 \%$ |
| | | Y | 95.40 | 88.3 | 13.8 | | 117.6 | |
| | | Z | 100.00 | 99.5 | 18.7 | | 110.1 | |
| 10100- CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.50 | 68.1 | 20.2 | 5.67 | 130.5 | $\pm 1.2 \%$ |
| | | Y | 6.11 | 66.7 | 19.2 | | 107.2 | |
| | | Z | 6.55 | 68.2 | 20.1 | | 142.7 | |

| | | | | | | | | |
|-----------|--|---|-------|------|------|------|-------|--------|
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 9.76 | 74.8 | 25.9 | 9.29 | 116.0 | ±2.5 % |
| | | Y | 8.85 | 72.2 | 24.1 | | 134.9 | |
| | | Z | 10.83 | 77.4 | 27.2 | | 131.5 | |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.36 | 67.7 | 20.1 | 5.80 | 128.7 | ±1.2 % |
| | | Y | 5.92 | 66.1 | 19.0 | | 106.6 | |
| | | Z | 6.42 | 67.7 | 20.0 | | 140.4 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.20 | 69.1 | 21.6 | 8.07 | 118.1 | ±2.5 % |
| | | Y | 10.27 | 69.3 | 21.4 | | 143.9 | |
| | | Z | 10.43 | 69.7 | 21.8 | | 131.0 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 9.09 | 73.7 | 25.5 | 9.28 | 112.0 | ±2.7 % |
| | | Y | 8.35 | 71.5 | 23.9 | | 131.1 | |
| | | Z | 9.58 | 74.4 | 25.6 | | 126.8 | |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.01 | 67.0 | 19.8 | 5.75 | 126.4 | ±1.2 % |
| | | Y | 6.17 | 67.7 | 19.9 | | 148.9 | |
| | | Z | 6.07 | 67.1 | 19.7 | | 137.2 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.41 | 67.4 | 19.9 | 5.82 | 130.9 | ±0.9 % |
| | | Y | 6.06 | 66.2 | 19.0 | | 109.1 | |
| | | Z | 6.54 | 67.7 | 20.0 | | 142.6 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.79 | 66.5 | 19.8 | 5.73 | 109.4 | ±0.9 % |
| | | Y | 4.82 | 67.1 | 19.8 | | 128.8 | |
| | | Z | 4.85 | 66.4 | 19.5 | | 119.0 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 8.44 | 79.3 | 28.7 | 9.21 | 125.1 | ±2.5 % |
| | | Y | 7.15 | 75.0 | 26.0 | | 144.0 | |
| | | Z | 10.13 | 83.8 | 30.8 | | 141.9 | |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 5.13 | 68.2 | 20.8 | 5.72 | 146.5 | ±0.9 % |
| | | Y | 4.77 | 66.8 | 19.6 | | 125.2 | |
| | | Z | 4.81 | 66.2 | 19.4 | | 118.5 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 5.11 | 68.1 | 20.7 | 5.72 | 146.4 | ±0.9 % |
| | | Y | 4.79 | 67.0 | 19.7 | | 126.0 | |
| | | Z | 4.88 | 66.6 | 19.7 | | 118.9 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.63 | 68.3 | 21.2 | 8.10 | 108.2 | ±2.5 % |
| | | Y | 9.84 | 68.9 | 21.3 | | 135.5 | |
| | | Z | 9.99 | 69.2 | 21.7 | | 124.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 6.99 | 67.3 | 19.7 | 5.97 | 134.8 | ±0.9 % |
| | | Y | 6.73 | 66.8 | 19.2 | | 115.9 | |
| | | Z | 6.71 | 66.2 | 19.0 | | 106.3 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 7.79 | 76.4 | 27.0 | 9.21 | 126.4 | ±2.5 % |
| | | Y | 7.19 | 75.1 | 26.1 | | 144.7 | |
| | | Z | 10.12 | 83.9 | 30.9 | | 142.0 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 8.19 | 71.9 | 24.7 | 9.24 | 103.3 | ±2.2 % |
| | | Y | 7.76 | 70.8 | 23.6 | | 122.0 | |
| | | Z | 9.31 | 75.2 | 26.4 | | 119.1 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 8.90 | 73.0 | 25.1 | 9.30 | 108.7 | ±2.2 % |
| | | Y | 8.38 | 71.6 | 24.0 | | 129.7 | |
| | | Z | 10.15 | 76.5 | 26.9 | | 126.1 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.42 | 67.2 | 19.2 | 3.96 | 119.1 | ±0.7 % |
| | | Y | 4.71 | 68.5 | 19.5 | | 143.8 | |
| | | Z | 4.39 | 66.7 | 18.6 | | 131.7 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.65 | 67.5 | 19.3 | 3.46 | 111.3 | ±0.5 % |
| | | Y | 3.89 | 69.0 | 19.6 | | 130.9 | |
| | | Z | 3.49 | 66.1 | 18.2 | | 122.4 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.60 | 67.6 | 19.3 | 3.39 | 114.4 | ±0.5 % |
| | | Y | 3.85 | 69.1 | 19.7 | | 133.4 | |
| | | Z | 3.45 | 66.2 | 18.2 | | 123.7 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.36 | 67.6 | 20.1 | 5.81 | 128.7 | ±1.2 % |
| | | Y | 5.95 | 66.1 | 19.0 | | 106.5 | |
| | | Z | 6.39 | 67.6 | 19.9 | | 140.7 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.98 | 68.4 | 20.6 | 6.06 | 134.9 | ±1.2 % |
| | | Y | 6.52 | 66.7 | 19.3 | | 111.3 | |
| | | Z | 7.06 | 68.6 | 20.5 | | 146.2 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 4.97 | 69.7 | 19.7 | 3.76 | 122.2 | ±0.5 % |
| | | Y | 5.31 | 71.6 | 20.2 | | 143.6 | |
| | | Z | 4.54 | 67.3 | 18.2 | | 133.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.77 | 69.4 | 19.6 | 3.77 | 120.8 | ±0.5 % |
| | | Y | 5.40 | 72.4 | 20.6 | | 141.3 | |
| | | Z | 4.71 | 68.5 | 18.9 | | 131.5 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 3.07 | 71.7 | 20.7 | 1.54 | 120.5 | ±0.7 % |
| | | Y | 3.52 | 73.8 | 21.0 | | 142.0 | |
| | | Z | 2.38 | 66.1 | 17.4 | | 129.6 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.73 | 68.3 | 21.2 | 8.23 | 114.7 | ±2.5 % |
| | | Y | 9.99 | 69.2 | 21.5 | | 138.0 | |
| | | Z | 10.10 | 69.4 | 21.9 | | 125.3 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 7 and 8).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.58 | 6.58 | 6.58 | 0.36 | 1.73 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.39 | 6.39 | 6.39 | 0.80 | 1.14 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.27 | 5.27 | 5.27 | 0.76 | 1.19 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.05 | 5.05 | 5.05 | 0.44 | 1.55 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 4.78 | 4.78 | 4.78 | 0.80 | 1.23 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.50 | 4.50 | 4.50 | 0.55 | 1.49 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.34 | 4.34 | 4.34 | 0.76 | 1.32 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.22 | 6.22 | 6.22 | 0.67 | 1.28 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.23 | 6.23 | 6.23 | 0.80 | 1.19 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.95 | 4.95 | 4.95 | 0.40 | 1.77 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.76 | 4.76 | 4.76 | 0.60 | 1.48 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 4.52 | 4.52 | 4.52 | 0.80 | 1.19 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.37 | 4.37 | 4.37 | 0.72 | 1.23 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.17 | 4.17 | 4.17 | 0.80 | 1.00 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

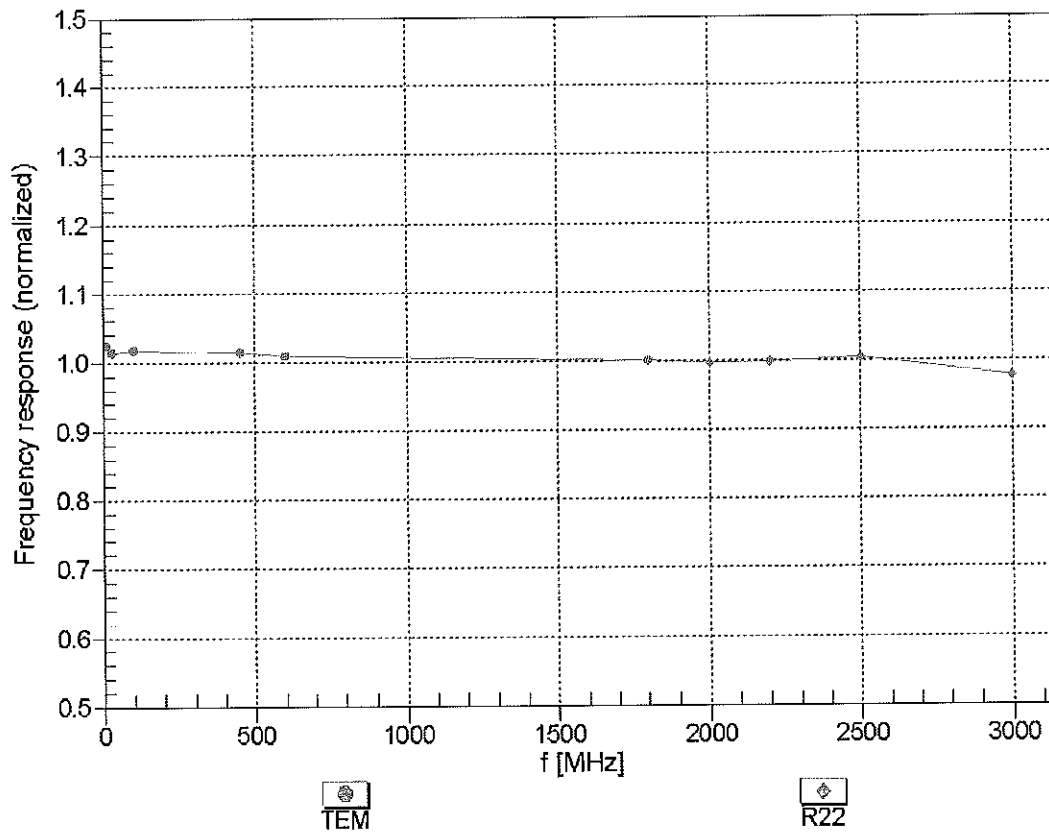



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


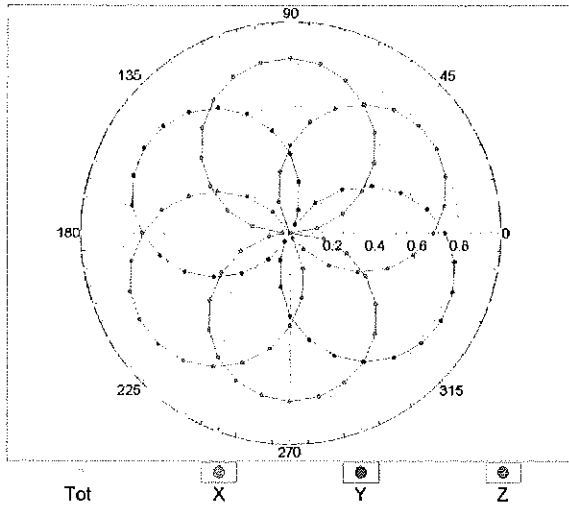


f=1800 MHz,R22

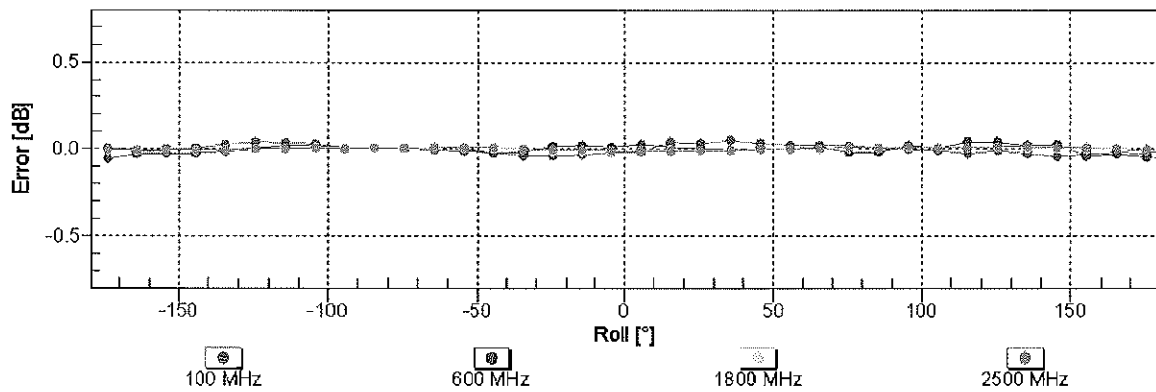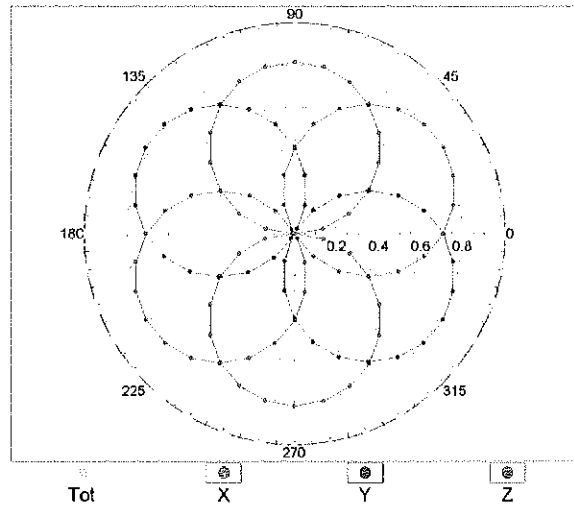


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

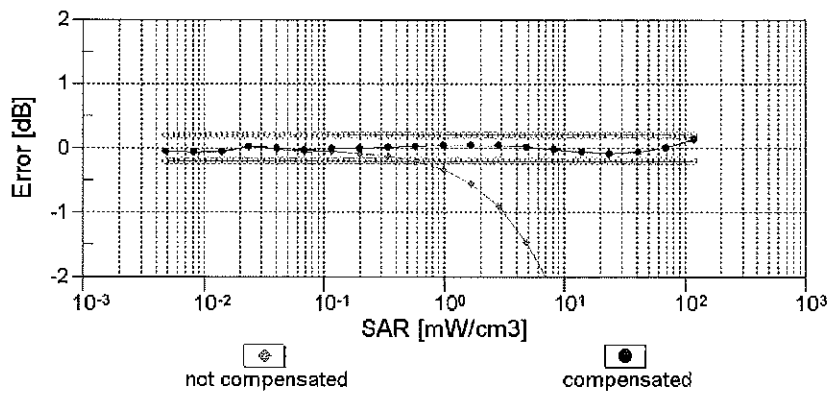
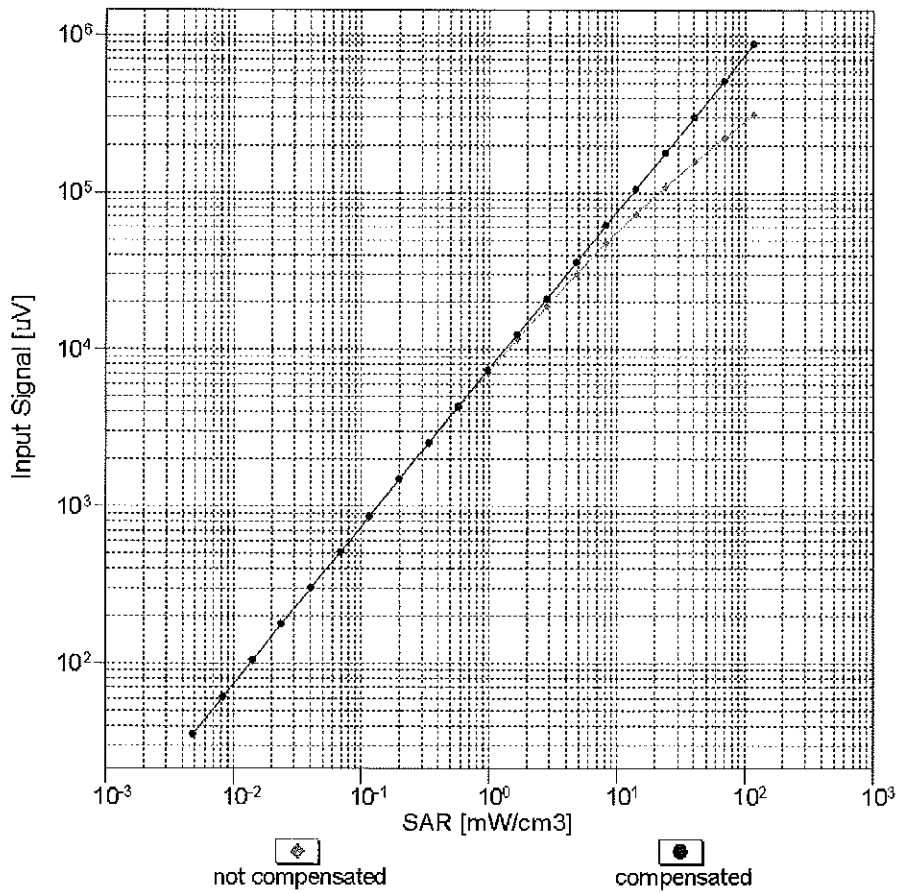


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

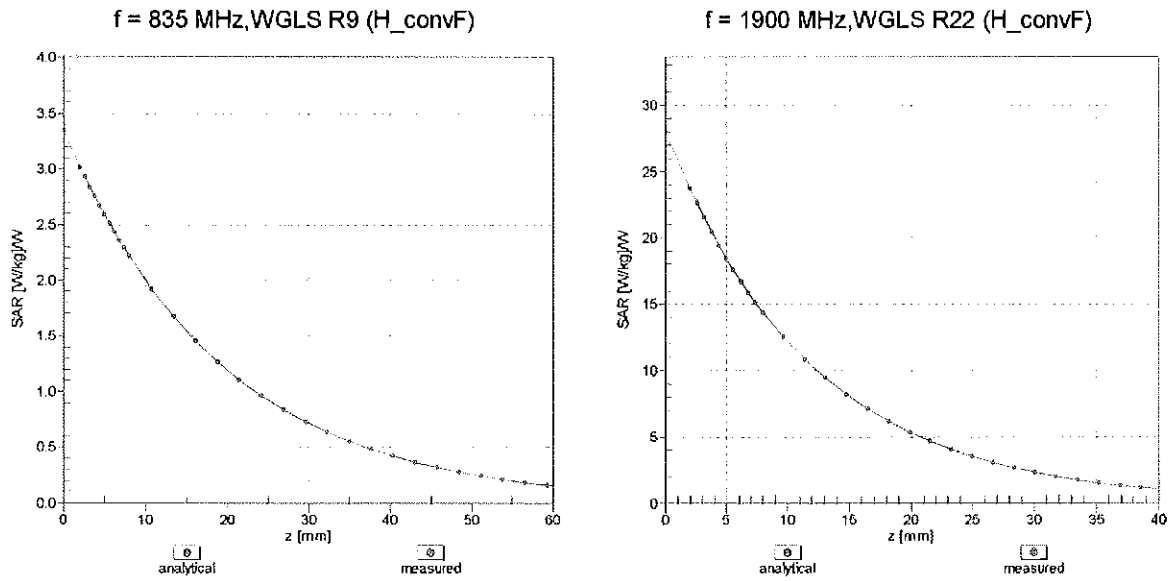

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

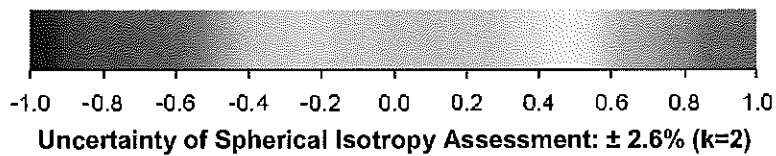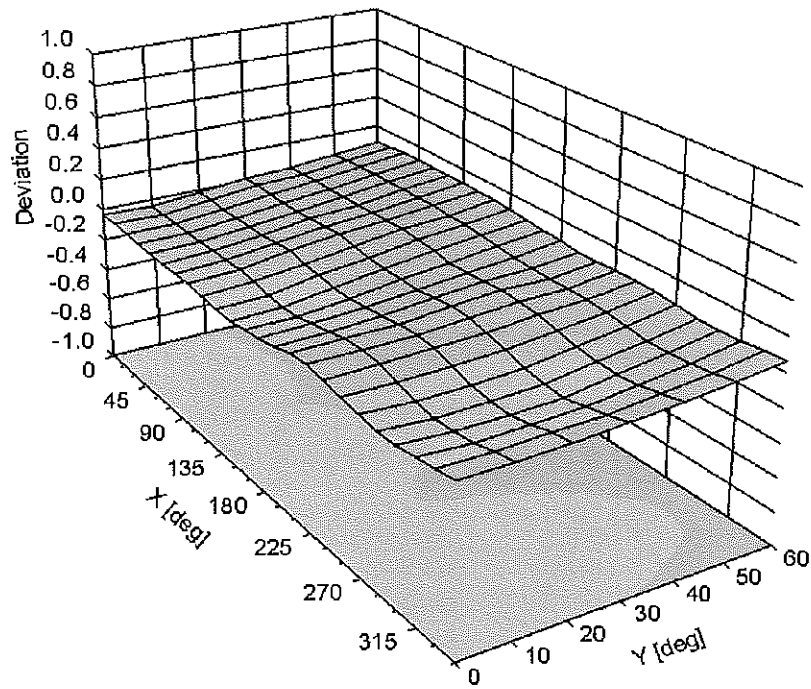

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -104.4 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3331_Aug14/2**

CALIBRATION CERTIFICATE (Replacement of No: ES3-3331_Aug14)

Object: **ES3DV3 - SN:3331**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes CC
2014/14

Calibration date: **August 20, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | in house check: Apr-16 |
| Network Analyzer HP 8763E | US37390585 | 18-Oct-01 (in house check Oct-13) | in house check: Oct-14 |

Calibrated by: **Lelf Klysnar** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Kalja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

issued: November 3, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3331

Manufactured: January 24, 2012
Calibrated: August 20, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3331

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---------------------------------------|----------|----------|----------|--------------|
| Norm ($\mu V/(V/m)^2$) ^A | 1.16 | 1.22 | 0.65 | $\pm 10.1\%$ |
| DCP (mV) ^B | 97.2 | 104.5 | 101.6 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu V}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----------|---|---|---------|------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 196.9 | $\pm 2.7\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 202.0 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 182.4 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 3.20 | 62.4 | 12.3 | 10.00 | 41.8 | $\pm 1.7\%$ |
| | | Y | 3.15 | 62.4 | 12.1 | | 43.7 | |
| | | Z | 36.65 | 88.0 | 19.5 | | 35.8 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 3.03 | 63.8 | 15.9 | 2.91 | 133.8 | $\pm 0.9\%$ |
| | | Y | 3.28 | 67.2 | 18.6 | | 140.9 | |
| | | Z | 3.32 | 66.8 | 18.3 | | 146.0 | |
| 10012-CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 2.51 | 63.6 | 15.0 | 1.87 | 134.4 | $\pm 0.9\%$ |
| | | Y | 3.11 | 69.9 | 19.3 | | 144.5 | |
| | | Z | 2.92 | 68.3 | 18.4 | | 145.1 | |
| 10013-CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.32 | 70.3 | 22.8 | 9.46 | 135.4 | $\pm 3.5\%$ |
| | | Y | 11.79 | 72.2 | 24.2 | | 146.6 | |
| | | Z | 11.30 | 70.4 | 22.8 | | 145.6 | |
| 10021-DAB | GSM-FDD (TDMA, GMSK) | X | 11.03 | 85.1 | 23.4 | 9.39 | 127.4 | $\pm 2.2\%$ |
| | | Y | 25.94 | 99.5 | 28.1 | | 119.9 | |
| | | Z | 11.02 | 88.4 | 24.4 | | 123.1 | |
| 10023-DAB | GPRS-FDD (TDMA, GMSK, TN 0) | X | 12.84 | 87.5 | 24.3 | 9.57 | 138.6 | $\pm 2.5\%$ |
| | | Y | 26.90 | 99.8 | 28.2 | | 146.7 | |
| | | Z | 10.27 | 87.7 | 24.4 | | 113.6 | |
| 10024-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 14.52 | 85.4 | 20.8 | 6.56 | 149.8 | $\pm 2.2\%$ |
| | | Y | 38.05 | 99.6 | 25.4 | | 119.6 | |
| | | Z | 31.13 | 99.9 | 25.4 | | 147.0 | |
| 10027-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 6.94 | 75.0 | 16.0 | 4.80 | 136.5 | $\pm 1.7\%$ |
| | | Y | 55.93 | 99.7 | 23.3 | | 134.0 | |
| | | Z | 38.81 | 99.8 | 23.8 | | 145.4 | |
| 10028-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 4.68 | 71.0 | 13.6 | 3.55 | 149.6 | $\pm 1.7\%$ |
| | | Y | 58.60 | 99.9 | 22.7 | | 140.1 | |
| | | Z | 41.15 | 99.6 | 22.7 | | 129.1 | |
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 1.18 | 62.6 | 8.4 | 1.16 | 134.1 | $\pm 1.7\%$ |
| | | Y | 81.15 | 99.6 | 19.6 | | 149.1 | |
| | | Z | 50.90 | 99.9 | 20.1 | | 142.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 4.57 | 64.6 | 17.2 | 4.57 | 130.2 | $\pm 1.4\%$ |
| | | Y | 4.83 | 67.2 | 19.3 | | 145.2 | |
| | | Z | 4.79 | 66.5 | 18.8 | | 141.3 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 3.91 | 64.7 | 17.0 | 3.97 | 148.6 | ±1.4 % |
| | | Y | 3.94 | 66.4 | 18.7 | | 139.3 | |
| | | Z | 3.93 | 65.9 | 18.3 | | 136.4 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 4.42 | 64.7 | 16.9 | 3.98 | 138.2 | ±1.2 % |
| | | Y | 4.53 | 66.5 | 18.6 | | 128.9 | |
| | | Z | 4.60 | 66.3 | 18.3 | | 127.5 | |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.39 | 66.6 | 18.8 | 5.67 | 143.8 | ±1.9 % |
| | | Y | 6.42 | 67.7 | 19.9 | | 134.4 | |
| | | Z | 6.37 | 66.9 | 19.2 | | 132.5 | |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.27 | 66.1 | 18.6 | 5.80 | 140.5 | ±1.9 % |
| | | Y | 6.27 | 67.1 | 19.7 | | 132.3 | |
| | | Z | 6.27 | 66.5 | 19.1 | | 131.1 | |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 5.98 | 65.6 | 18.4 | 5.75 | 137.0 | ±1.9 % |
| | | Y | 5.98 | 66.8 | 19.6 | | 129.1 | |
| | | Z | 5.98 | 66.2 | 19.1 | | 128.1 | |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.08 | 68.1 | 20.6 | 8.10 | 131.5 | ±3.3 % |
| | | Y | 10.54 | 69.9 | 22.0 | | 148.4 | |
| | | Z | 10.46 | 69.1 | 21.2 | | 149.0 | |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.12 | 68.2 | 20.6 | 8.07 | 132.9 | ±2.7 % |
| | | Y | 10.54 | 69.9 | 21.9 | | 149.5 | |
| | | Z | 10.04 | 68.1 | 20.6 | | 123.5 | |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 10.07 | 74.1 | 24.8 | 9.28 | 135.5 | ±3.8 % |
| | | Y | 10.33 | 76.0 | 26.3 | | 123.9 | |
| | | Z | 9.05 | 71.9 | 23.9 | | 145.1 | |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 5.96 | 65.6 | 18.4 | 5.75 | 137.0 | ±1.9 % |
| | | Y | 5.93 | 66.5 | 19.4 | | 128.7 | |
| | | Z | 6.00 | 66.2 | 19.1 | | 129.9 | |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.41 | 66.2 | 18.7 | 5.82 | 141.3 | ±1.9 % |
| | | Y | 6.42 | 67.3 | 19.8 | | 133.3 | |
| | | Z | 6.45 | 66.8 | 19.3 | | 133.9 | |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 5.01 | 65.6 | 18.5 | 5.73 | 139.9 | ±1.7 % |
| | | Y | 5.00 | 66.9 | 19.8 | | 133.5 | |
| | | Z | 4.88 | 66.1 | 19.2 | | 132.6 | |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 9.20 | 77.8 | 26.8 | 9.21 | 149.1 | ±3.8 % |
| | | Y | 11.00 | 84.2 | 30.5 | | 140.6 | |
| | | Z | 7.06 | 72.2 | 24.3 | | 129.4 | |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.93 | 65.2 | 18.3 | 5.72 | 131.8 | ±1.7 % |
| | | Y | 5.03 | 67.0 | 19.9 | | 133.9 | |
| | | Z | 4.97 | 66.5 | 19.4 | | 148.0 | |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.97 | 65.4 | 18.3 | 5.72 | 137.6 | ±1.9 % |
| | | Y | 5.01 | 66.9 | 19.8 | | 133.3 | |
| | | Z | 4.96 | 66.5 | 19.4 | | 146.6 | |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 9.74 | 67.7 | 20.4 | 8.09 | 123.4 | ±3.0 % |
| | | Y | 10.16 | 69.5 | 21.8 | | 142.8 | |
| | | Z | 10.03 | 68.5 | 21.0 | | 136.4 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 9.71 | 67.7 | 20.4 | 8.10 | 124.5 | ±3.0 % |
| | | Y | 10.16 | 69.5 | 21.9 | | 144.1 | |
| | | Z | 10.17 | 68.9 | 21.2 | | 146.1 | |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 9.59 | 67.5 | 20.3 | 8.03 | 123.8 | ±3.0 % |
| | | Y | 10.07 | 69.5 | 21.8 | | 143.7 | |
| | | Z | 10.08 | 68.9 | 21.2 | | 145.5 | |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 10.01 | 68.0 | 20.5 | 8.06 | 129.1 | ±2.7 % |
| | | Y | 10.16 | 69.0 | 21.4 | | 123.7 | |
| | | Z | 10.02 | 68.1 | 20.7 | | 123.3 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 6.84 | 65.7 | 18.3 | 5.97 | 128.3 | ±1.7 % |
| | | Y | 7.10 | 67.5 | 19.8 | | 145.9 | |
| | | Z | 7.17 | 67.2 | 19.4 | | 146.7 | |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 9.23 | 77.8 | 26.8 | 9.21 | 149.7 | ±4.1 % |
| | | Y | 11.46 | 85.4 | 31.1 | | 143.6 | |
| | | Z | 7.17 | 72.6 | 24.5 | | 132.3 | |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 9.84 | 74.4 | 25.0 | 9.24 | 143.3 | ±4.1 % |
| | | Y | 11.53 | 80.3 | 28.7 | | 147.8 | |
| | | Z | 8.43 | 71.1 | 23.5 | | 136.1 | |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 9.60 | 72.7 | 24.1 | 9.30 | 124.1 | ±3.5 % |
| | | Y | 10.50 | 76.3 | 26.6 | | 125.1 | |
| | | Z | 9.07 | 72.0 | 23.9 | | 144.3 | |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 5.95 | 66.0 | 18.0 | 4.87 | 147.1 | ±1.7 % |
| | | Y | 6.00 | 67.2 | 19.2 | | 139.8 | |
| | | Z | 6.11 | 67.0 | 18.9 | | 140.5 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 4.17 | 64.3 | 16.7 | 3.96 | 129.0 | ±1.2 % |
| | | Y | 4.50 | 67.3 | 19.1 | | 144.7 | |
| | | Z | 4.48 | 66.8 | 18.5 | | 141.5 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 3.50 | 64.4 | 16.6 | 3.46 | 142.1 | ±1.2 % |
| | | Y | 3.69 | 67.2 | 19.0 | | 134.8 | |
| | | Z | 3.67 | 66.6 | 18.5 | | 130.8 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 3.45 | 64.5 | 16.5 | 3.39 | 145.2 | ±1.2 % |
| | | Y | 3.64 | 67.3 | 19.0 | | 135.9 | |
| | | Z | 3.66 | 67.0 | 18.7 | | 133.8 | |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.28 | 66.1 | 18.6 | 5.81 | 139.0 | ±1.9 % |
| | | Y | 6.28 | 67.2 | 19.8 | | 130.1 | |
| | | Z | 6.29 | 66.6 | 19.2 | | 128.4 | |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.86 | 66.8 | 19.1 | 6.06 | 144.5 | ±1.9 % |
| | | Y | 6.89 | 67.9 | 20.2 | | 135.9 | |
| | | Z | 6.88 | 67.3 | 19.6 | | 135.0 | |
| 10315-AAA | IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 2.32 | 63.0 | 14.7 | 1.71 | 128.7 | ±0.7 % |
| | | Y | 3.14 | 71.0 | 20.1 | | 142.2 | |
| | | Z | 2.95 | 69.2 | 18.9 | | 142.4 | |
| 10316-AAA | IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 9.99 | 68.0 | 20.8 | 8.36 | 125.5 | ±3.3 % |
| | | Y | 10.41 | 69.8 | 22.2 | | 141.5 | |
| | | Z | 10.36 | 69.1 | 21.4 | | 143.6 | |

| | | | | | | | | |
|-----------|---|---|-------|------|------|------|-------|--------|
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 4.41 | 65.2 | 16.6 | 3.76 | 135.0 | ±0.9 % |
| | | Y | 4.81 | 68.3 | 19.0 | | 149.0 | |
| | | Z | 4.82 | 68.1 | 18.7 | | 150.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 4.31 | 65.1 | 16.6 | 3.77 | 131.6 | ±0.9 % |
| | | Y | 4.71 | 68.2 | 19.0 | | 146.2 | |
| | | Z | 4.86 | 68.7 | 19.0 | | 147.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 2.13 | 62.1 | 14.2 | 1.54 | 128.1 | ±0.7 % |
| | | Y | 2.65 | 68.6 | 19.0 | | 142.6 | |
| | | Z | 2.74 | 68.5 | 18.7 | | 143.2 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.84 | 67.8 | 20.6 | 8.23 | 125.2 | ±3.0 % |
| | | Y | 10.22 | 69.5 | 21.9 | | 142.0 | |
| | | Z | 10.23 | 68.9 | 21.3 | | 144.4 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Pages 8 and 9).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3331

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.47 | 6.47 | 6.47 | 0.48 | 1.48 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.24 | 6.24 | 6.24 | 0.30 | 1.98 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.28 | 5.28 | 5.28 | 0.75 | 1.19 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.09 | 5.09 | 5.09 | 0.80 | 1.16 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.48 | 4.48 | 4.48 | 0.70 | 1.32 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.38 | 4.38 | 4.38 | 0.80 | 1.29 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3331

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 6.12 | 6.12 | 6.12 | 0.64 | 1.30 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.14 | 6.14 | 6.14 | 0.80 | 1.14 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 4.93 | 4.93 | 4.93 | 0.46 | 1.67 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.73 | 4.73 | 4.73 | 0.44 | 1.72 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.29 | 4.29 | 4.29 | 0.71 | 0.98 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.23 | 4.23 | 4.23 | 0.68 | 1.00 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)


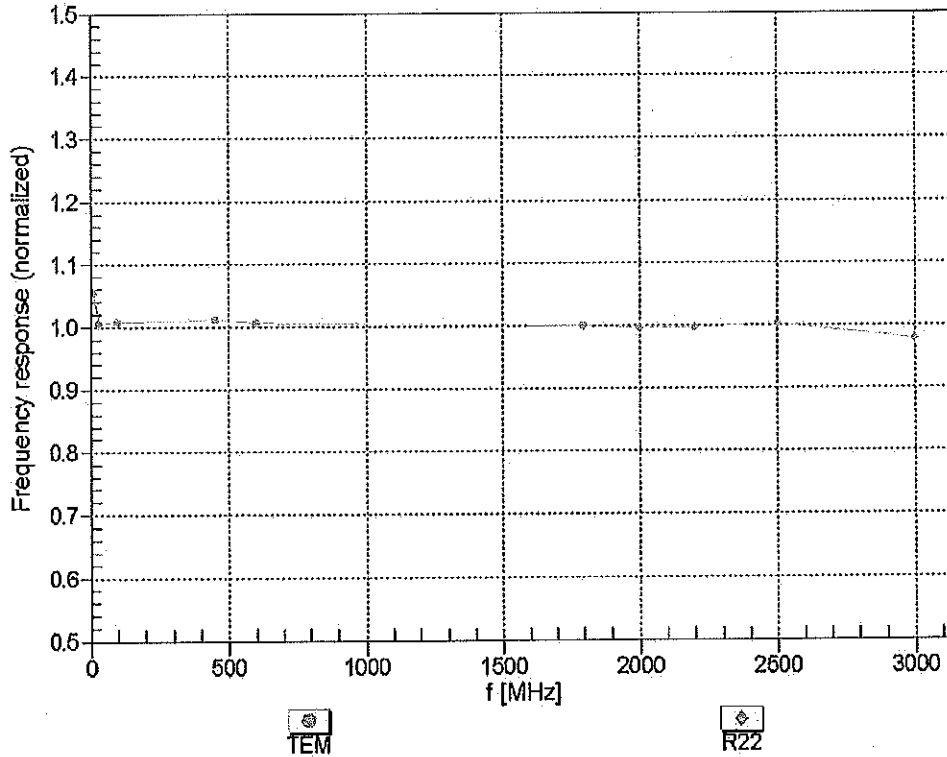


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz, TEM

f=1800 MHz, R22

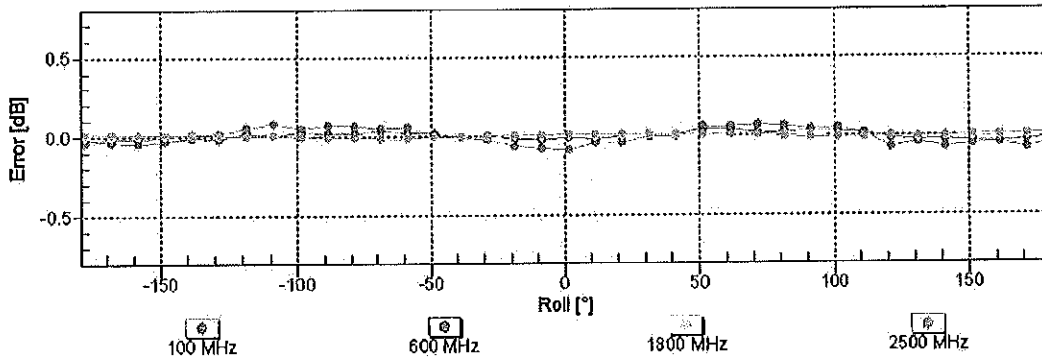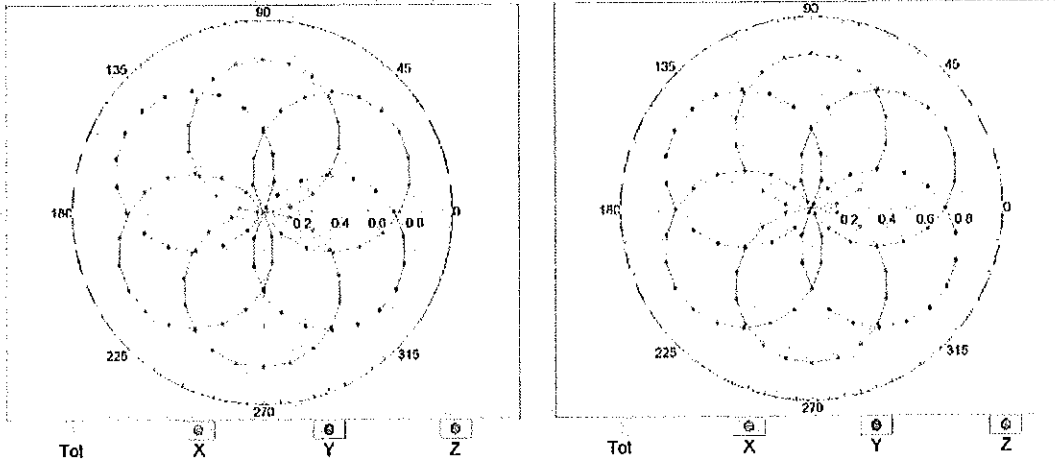


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

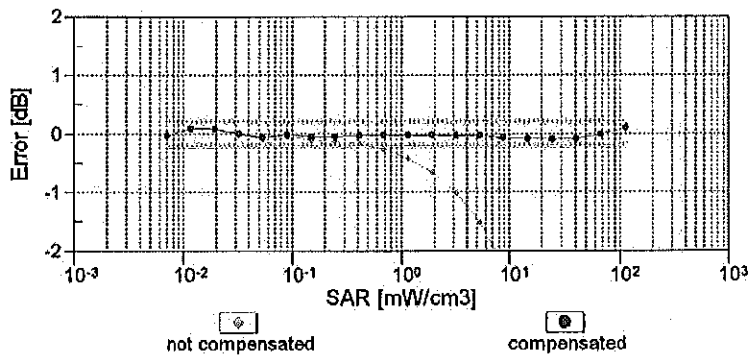
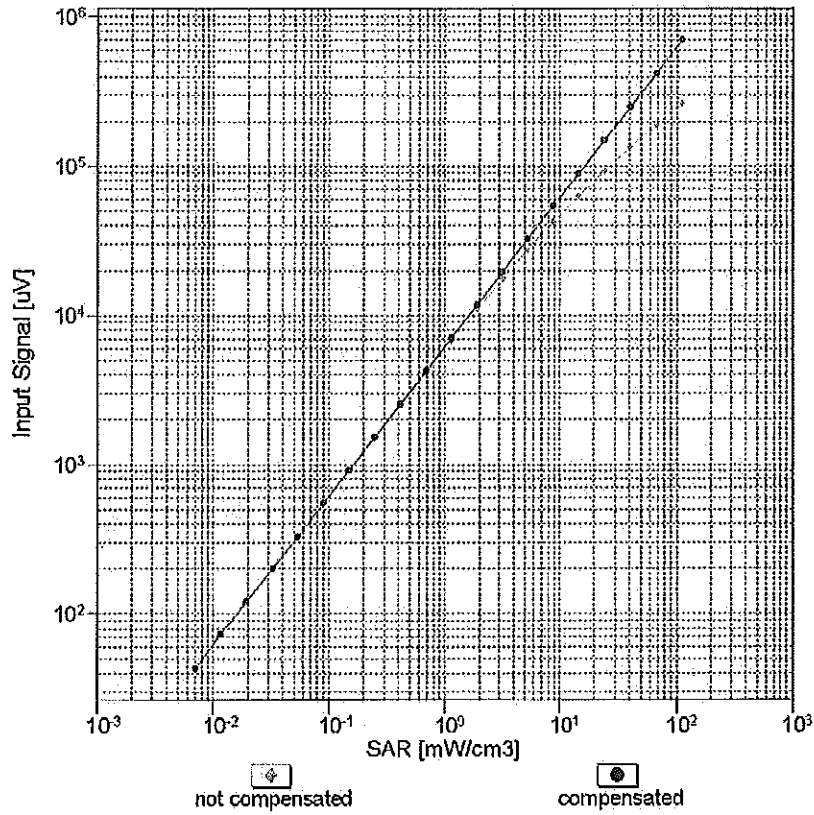


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

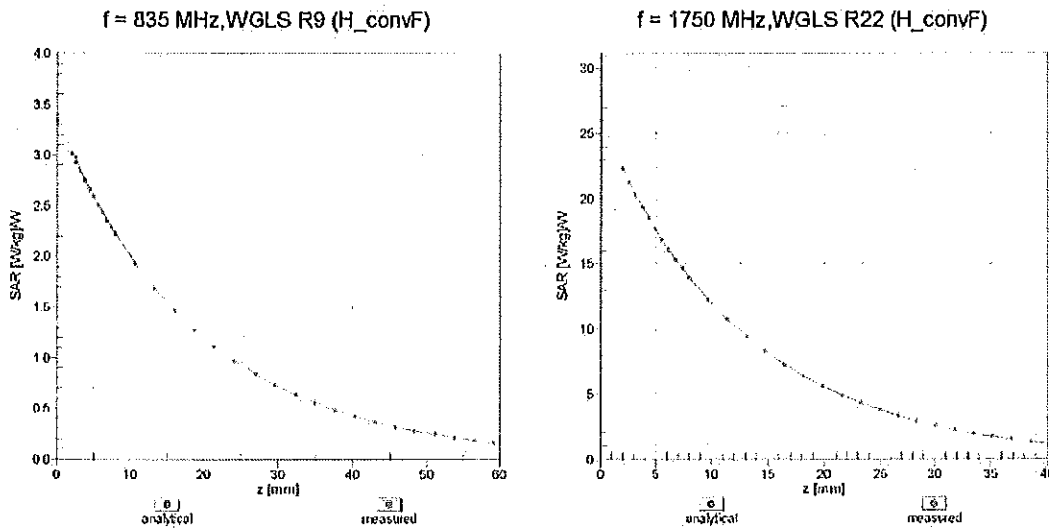

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

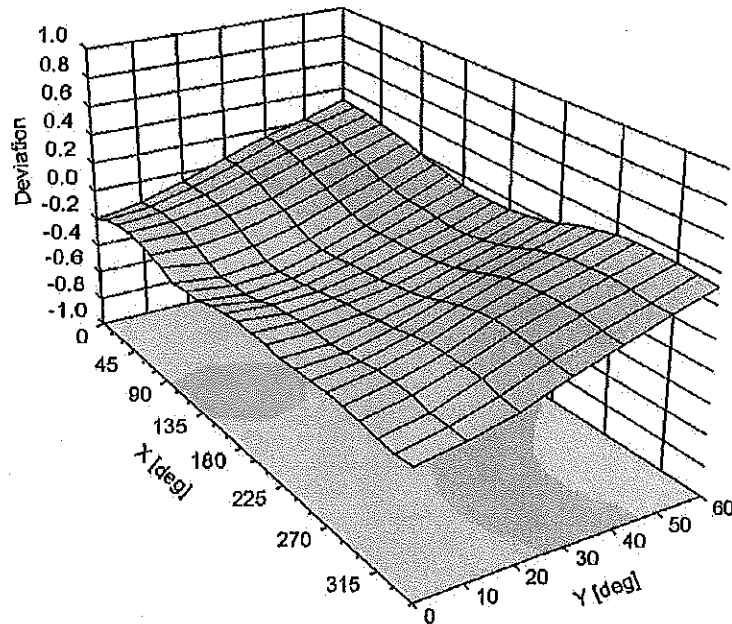

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3331**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -108.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:



- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho' \cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

**Table D-I
Composition of the Tissue Equivalent Matter**

| Frequency (MHz) | 750 | 750 | 835 | 835 | 1750 | 1750 | 1900 | 1900 | 2450 | 2450 |
|---------------------------|------|------|-------|-------|------|------|-------|-------|------|------|
| Tissue | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body |
| Ingredients (% by weight) | | | | | | | | | | |
| Bactericide | | | 0.1 | 0.1 | | | | | | |
| DGBE | | | | | 47 | 31 | 44.92 | 29.44 | | 26.7 |
| HEC | | | 1 | 1 | | | | | | |
| NaCl | | | 1.45 | 0.94 | 0.4 | 0.2 | 0.18 | 0.39 | | 0.1 |
| Sucrose | | | 57 | 44.9 | | | | | | |
| Water | | | 40.45 | 53.06 | 52.6 | 68.8 | 54.9 | 70.17 | | 73.2 |

| | | | | |
|---|--|------------------------------|---|--|
| FCC ID: A3LSMS978L |  <small>PROBING TECHNOLOGIES, INC.</small> | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | | APPENDIX D: Page 1 of 4 |

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

| | |
|------------------------|---|
| H ₂ O | Water, 35 – 58% |
| Sucrose | Sugar, white, refined, 40 – 60% |
| NaCl | Sodium Chloride, 0 – 6% |
| Hydroxyethyl-cellulose | Medium Viscosity (CAS# 9004-62-0), <0.3% |
| Preventol-D7 | Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7% |

Relevant for safety; Refer to the respective Safety Data Sheet*.

Figure D-1
Composition of 750 MHz Head and Body Tissue Equivalent Matter

Note: 750MHz liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

Measurement Certificate / Material Test

| | |
|--------------|--|
| Item Name | Body Tissue Simulating Liquid (MSL750V2) |
| Product No. | SL AAM 075 AA (Charge: 130828-1) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1526 and IEC 62209 compliance standards.

Test Condition

| | |
|-----------------|---|
| Ambient | Environment temperatur (22 ± 3)°C and humidity < 70%. |
| TSL Temperature | 22°C |
| Test Date | 28-Aug-13 |
| Operator | IEN |

Additional Information

| | |
|-------------------|-------------------------|
| TSL Density | 1.212 g/cm ³ |
| TSL Heat-capacity | 3.006 kJ/(kg*K) |

| f (MHz) | Measured | | | Target | | Diff. to Target [%] | |
|------------|-------------|--------------|-------------|-------------|-------------|---------------------|-------------|
| | HP-e' | HP-e'' | sigma | eps | sigma | Δ-eps | Δ-sigma |
| 600 | 57.4 | 24.76 | 0.83 | 56.1 | 0.95 | 2.3 | -13.2 |
| 625 | 57.1 | 24.42 | 0.85 | 56.0 | 0.95 | 2.0 | -11.0 |
| 650 | 56.8 | 24.09 | 0.87 | 55.9 | 0.96 | 1.6 | -8.9 |
| 675 | 56.6 | 23.80 | 0.89 | 55.8 | 0.96 | 1.3 | -6.7 |
| 700 | 56.3 | 23.52 | 0.92 | 55.7 | 0.96 | 1.0 | -4.5 |
| 725 | 56.1 | 23.27 | 0.94 | 55.6 | 0.96 | 0.8 | -2.4 |
| 750 | 55.8 | 23.03 | 0.96 | 55.5 | 0.96 | 0.5 | -0.3 |
| 775 | 55.6 | 22.87 | 0.99 | 55.4 | 0.97 | 0.2 | 2.1 |
| 800 | 55.3 | 22.71 | 1.01 | 55.3 | 0.97 | -0.1 | 4.5 |
| 825 | 55.1 | 22.54 | 1.03 | 55.2 | 0.98 | -0.3 | 5.8 |
| 838 | 54.9 | 22.45 | 1.05 | 55.2 | 0.98 | -0.5 | 6.4 |
| 850 | 54.8 | 22.37 | 1.06 | 55.2 | 0.98 | -0.6 | 7.0 |
| 875 | 54.6 | 22.25 | 1.08 | 55.1 | 1.02 | -0.9 | 6.2 |
| 900 | 54.4 | 22.13 | 1.11 | 55.0 | 1.05 | -1.1 | 5.5 |
| 925 | 54.2 | 22.02 | 1.13 | 55.0 | 1.06 | -1.5 | 6.6 |
| 950 | 53.9 | 21.91 | 1.16 | 54.9 | 1.08 | -1.8 | 7.7 |
| 975 | 53.7 | 21.84 | 1.18 | 54.9 | 1.09 | -2.2 | 9.0 |
| 1000 | 53.5 | 21.77 | 1.21 | 54.8 | 1.10 | -2.5 | 10.3 |

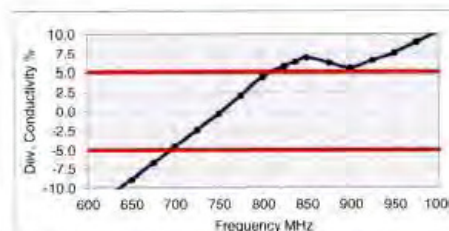
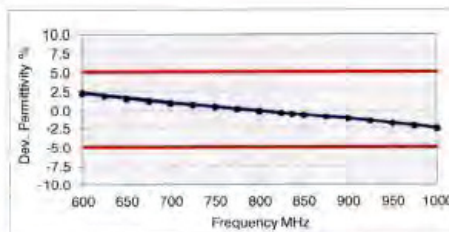


Figure D-2
750MHz Body Tissue Equivalent Matter

| | | | | |
|------------------------------------|-------------------------------|-----------------------|--|---------------------------------|
| FCC ID: A3LSMS978L | | SAR EVALUATION REPORT | | Reviewed by: Quality Manager |
| Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | | APPENDIX D: Page 2 of 4 |

Measurement Certificate / Material Test

| | |
|--------------|--|
| Item Name | Head Tissue Simulating Liquid (HSL750V2) |
| Product No. | SL AAH 075 AA (Charge: 130826-2) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Environment temperatur (22 ± 3)°C and humidity < 70%.
 TSL Temperature 22°C
 Test Date 28-Aug-13
 Operator IEN

Additional Information

TSL Density 1.284 g/cm³
 TSL Heat-capacity 2.701 kJ/(kg*K)

| f [MHz] | Measured | | | Target | | Diff.to Target [%] | |
|------------|-------------|--------------|-------------|-------------|-------------|--------------------|------------|
| | HP-e' | HP-e'' | sigma | eps | sigma | Δ-eps | Δ-sigma |
| 600 | 44.4 | 23.32 | 0.78 | 42.7 | 0.88 | 3.9 | -11.7 |
| 625 | 44.0 | 23.05 | 0.80 | 42.6 | 0.88 | 3.4 | -9.3 |
| 650 | 43.6 | 22.78 | 0.82 | 42.5 | 0.89 | 2.8 | -7.0 |
| 675 | 43.3 | 22.54 | 0.85 | 42.3 | 0.89 | 2.2 | -4.7 |
| 700 | 42.9 | 22.30 | 0.87 | 42.2 | 0.89 | 1.6 | -2.4 |
| 725 | 42.6 | 22.10 | 0.89 | 42.1 | 0.89 | 1.2 | 0.0 |
| 750 | 42.3 | 21.90 | 0.91 | 41.9 | 0.89 | 0.8 | 2.3 |
| 775 | 41.9 | 21.74 | 0.94 | 41.8 | 0.90 | 0.2 | 4.6 |
| 800 | 41.6 | 21.57 | 0.96 | 41.7 | 0.90 | -0.3 | 7.0 |
| 825 | 41.3 | 21.42 | 0.98 | 41.6 | 0.91 | -0.8 | 8.4 |
| 838 | 41.1 | 21.35 | 0.99 | 41.5 | 0.91 | -1.0 | 9.1 |
| 850 | 41.0 | 21.27 | 1.01 | 41.5 | 0.92 | -1.3 | 9.8 |
| 875 | 40.7 | 21.14 | 1.03 | 41.5 | 0.94 | -2.0 | 9.1 |
| 900 | 40.4 | 21.00 | 1.05 | 41.5 | 0.97 | -2.6 | 9.4 |
| 925 | 40.1 | 20.89 | 1.07 | 41.5 | 0.98 | -3.2 | 9.4 |
| 950 | 39.9 | 20.78 | 1.10 | 41.4 | 0.99 | -3.8 | 10.4 |
| 975 | 39.6 | 20.69 | 1.12 | 41.4 | 1.00 | -4.4 | 11.7 |
| 1000 | 39.3 | 20.60 | 1.15 | 41.3 | 1.01 | -4.9 | 12.9 |

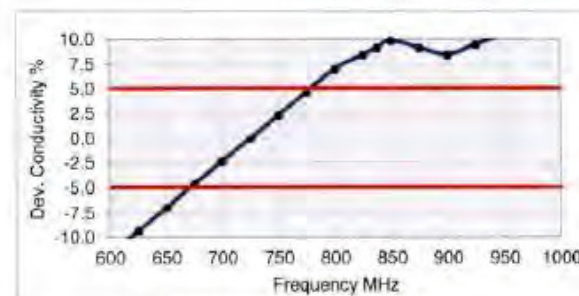
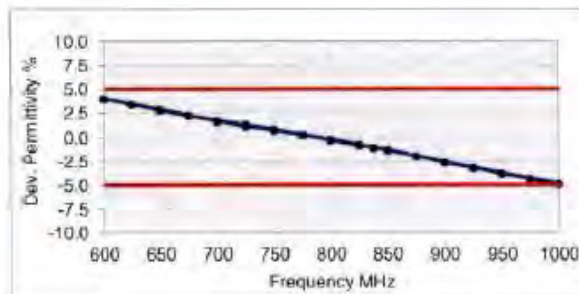




Figure D-3
750MHz Head Tissue Equivalent Matter

| | | | | |
|------------------------------------|---|-----------------------|---|---------------------------------|
| FCC ID: A3LSMS978L |  | SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | | APPENDIX D: Page 3 of 4 |

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

| | |
|---------|---|
| H2O | Water, 52 – 75% |
| C8H18O3 | Diethylene glycol monobutyl ether (DGBE), 25 – 48% (CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8) Relevant for safety; Refer to the respective Safety Data Sheet*. |
| NaCl | Sodium Chloride, <1.0% |

Figure D-4

Composition of 2.4 GHz Head Tissue Equivalent Matter

Note: 2.4 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

Measurement Certificate / Material Test

| | |
|--------------|---|
| Item Name | Head Tissue Simulating Liquid (HSL2450V2) |
| Product No. | SL AAH 245 BA (Charge: 130926-1) |
| Manufacturer | SPEAG |

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Environment temperatur (22 ± 3)°C and humidity < 70%.
 TSL Temperature 23°C
 Test Date 2-Oct-13
 Operator CL

Additional Information

TSL Density 0.988 g/cm³
 TSL Heat-capacity 3.680 kJ/(kg·K)

| f (MHz) | Measured | | | Target | | Diff. to Target [%] | |
|---------|----------|--------|-------|--------|-------|---------------------|---------|
| | HP-e' | HP-e'' | sigma | eps | sigma | Δ-eps | Δ-sigma |
| 1900 | 40.3 | 11.88 | 1.26 | 40.0 | 1.40 | 0.0 | -10.3 |
| 1925 | 40.3 | 11.98 | 1.28 | 40.0 | 1.40 | 0.6 | -8.3 |
| 1950 | 40.2 | 12.08 | 1.31 | 40.0 | 1.40 | 0.4 | -6.4 |
| 1975 | 40.1 | 12.15 | 1.34 | 40.0 | 1.40 | 0.2 | -4.6 |
| 2000 | 40.0 | 12.23 | 1.36 | 40.0 | 1.40 | -0.1 | -2.8 |
| 2025 | 39.9 | 12.34 | 1.39 | 40.0 | 1.42 | -0.2 | -2.3 |
| 2050 | 39.8 | 12.45 | 1.42 | 39.9 | 1.44 | -0.3 | -1.7 |
| 2075 | 39.7 | 12.54 | 1.45 | 39.9 | 1.47 | -0.4 | -1.3 |
| 2100 | 39.6 | 12.64 | 1.48 | 39.8 | 1.49 | -0.5 | -0.8 |
| 2125 | 39.5 | 12.69 | 1.50 | 39.8 | 1.51 | -0.7 | -0.7 |
| 2150 | 39.4 | 12.75 | 1.52 | 39.7 | 1.53 | -0.8 | -0.6 |
| 2175 | 39.3 | 12.84 | 1.55 | 39.7 | 1.56 | -1.0 | 0.1 |
| 2200 | 39.2 | 12.94 | 1.58 | 39.6 | 1.58 | -1.2 | 0.4 |
| 2225 | 39.1 | 13.00 | 1.61 | 39.6 | 1.60 | -1.3 | 0.6 |
| 2250 | 39.0 | 13.07 | 1.64 | 39.6 | 1.62 | -1.4 | 0.8 |
| 2275 | 38.9 | 13.15 | 1.66 | 39.5 | 1.64 | -1.5 | 1.2 |
| 2300 | 38.8 | 13.22 | 1.69 | 39.5 | 1.67 | -1.7 | 1.5 |
| 2325 | 38.7 | 13.32 | 1.72 | 39.4 | 1.69 | -1.9 | 2.0 |
| 2350 | 38.6 | 13.42 | 1.75 | 39.4 | 1.71 | -2.0 | 2.5 |
| 2375 | 38.5 | 13.49 | 1.78 | 39.3 | 1.73 | -2.1 | 2.8 |
| 2400 | 38.4 | 13.56 | 1.81 | 39.3 | 1.76 | -2.3 | 3.1 |
| 2425 | 38.3 | 13.63 | 1.84 | 39.2 | 1.78 | -2.5 | 3.5 |
| 2450 | 38.2 | 13.71 | 1.87 | 39.2 | 1.80 | -2.6 | 3.8 |
| 2475 | 38.1 | 13.79 | 1.90 | 39.2 | 1.83 | -2.8 | 3.9 |
| 2500 | 38.0 | 13.87 | 1.93 | 39.1 | 1.85 | -3.0 | 4.0 |
| 2525 | 37.9 | 13.96 | 1.96 | 39.1 | 1.88 | -3.1 | 4.2 |
| 2550 | 37.8 | 14.05 | 1.99 | 39.1 | 1.91 | -3.3 | 4.4 |
| 2575 | 37.7 | 14.11 | 2.02 | 39.0 | 1.94 | -3.5 | 4.4 |
| 2600 | 37.5 | 14.17 | 2.05 | 39.0 | 1.96 | -3.8 | 4.4 |
| 2625 | 37.4 | 14.23 | 2.08 | 39.0 | 1.99 | -4.0 | 4.4 |
| 2650 | 37.3 | 14.30 | 2.11 | 38.9 | 2.02 | -4.2 | 4.5 |
| 2675 | 37.2 | 14.37 | 2.14 | 38.9 | 2.05 | -4.4 | 4.6 |
| 2700 | 37.1 | 14.45 | 2.17 | 38.9 | 2.07 | -4.6 | 4.7 |

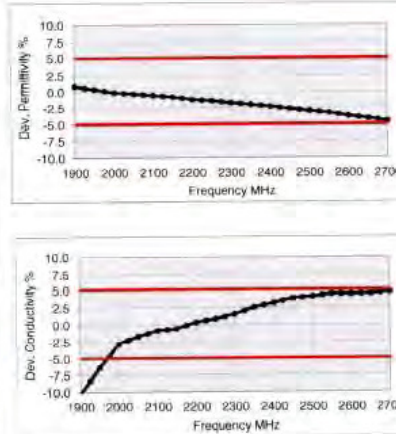


Figure D-5

2.4 GHz Head Tissue Equivalent Matter

| | | | | |
|------------------------------------|-------------------------------|-----------------------|--|---------------------------------|
| FCC ID: A3LSMS978L | | SAR EVALUATION REPORT | | Reviewed by: Quality Manager |
| Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | | | APPENDIX D: Page 4 of 4 |

APPENDIX E: SAR SYSTEM VALIDATION



Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 v01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-I
SAR System Validation Summary

| SAR SYSTEM # | FREQ. [MHz] | DATE | PROBE SN | PROBE TYPE | PROBE CAL. POINT | | COND. | PERM. | CW VALIDATION | | | MOD. VALIDATION | | |
|--------------|-------------|------------|----------|------------|------------------|------|-------|-------------------|---------------|-----------------|----------------|-----------------|-------------|------|
| | | | | | | | (σ) | (ε _r) | SENSI-TIVITY | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE | DUTY FACTOR | PAR |
| J | 750 | 9/26/2014 | 3022 | ES3DV2 | 750 | Head | 0.916 | 40.24 | PASS | PASS | PASS | N/A | N/A | N/A |
| D | 835 | 8/8/2014 | 3263 | ES3DV3 | 835 | Head | 0.907 | 40.44 | PASS | PASS | PASS | GMSK | PASS | N/A |
| K | 1750 | 10/16/2014 | 3288 | ES3DV3 | 1750 | Head | 1.368 | 38.52 | PASS | PASS | PASS | N/A | N/A | N/A |
| B | 1900 | 1/6/2015 | 3334 | ES3DV3 | 1900 | Head | 1.444 | 38.33 | PASS | PASS | PASS | GMSK | PASS | N/A |
| E | 2450 | 11/5/2014 | 3332 | ES3DV3 | 2450 | Head | 1.868 | 39.67 | PASS | PASS | PASS | OFDM/TDD | PASS | PASS |
| B | 750 | 1/3/2015 | 3334 | ES3DV3 | 750 | Body | 0.987 | 56.40 | PASS | PASS | PASS | N/A | N/A | N/A |
| D | 835 | 4/8/2015 | 3209 | ES3DV3 | 835 | Body | 1.007 | 54.13 | PASS | PASS | PASS | GMSK | PASS | N/A |
| G | 1750 | 2/4/2015 | 3318 | ES3DV3 | 1750 | Body | 1.451 | 51.41 | PASS | PASS | PASS | N/A | N/A | N/A |
| K | 1900 | 10/15/2014 | 3288 | ES3DV3 | 1900 | Body | 1.532 | 50.91 | PASS | PASS | PASS | GMSK | PASS | N/A |
| A | 2450 | 1/14/2015 | 3331 | ES3DV3 | 2450 | Body | 2.004 | 50.59 | PASS | PASS | PASS | OFDM | N/A | PASS |

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

| | | | |
|------------------------------------|---|---|---------------------------------|
| FCC ID: A3LSMS978L |  SAR EVALUATION REPORT |  | Reviewed by: Quality Manager |
| Test Dates: 03/09/15 - 04/27/15 | DUT Type: Portable Handset | APPENDIX E: Page 1 of 1 | |