



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E**

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Tablet + Bluetooth, DTS b/g/n

MODEL NUMBER : SM-T561Y

FCC ID: A3LSMT561Y

REPORT NUMBER: 15K20294-E4

ISSUE DATE: APRIL 24, 2015

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by
**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

Rev.	Issue Date	Revisions	Revised By
--	04/24/15	Initial issue	CY Choi

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER (GSM)	7
5.3. MAXIMUM OUTPUT POWER (WCDMA)	7
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.5. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. Summary Table	11
8. RF POWER OUTPUT VERIFICATION	12
8.1. GSM/GPRS/EDGE	12
8.1.1. GSM OUTPUT POWER RESULT.....	13
8.2. UMTS REL 99.....	14
9. PEAK TO AVERAGE RATIO	19
9.1. CONDUCTED PEAK TO AVERAGE RESULT.....	19
9.2. CONDUCTED PEAK TO AVERAGE PLOTS.....	20
10. LIMITS AND CONDUCTED RESULTS.....	21
10.1. OCCUPIED BANDWIDTH.....	21
10.1.1. OCCUPIED BANDWIDTH RESULTS.....	21
10.1.2. OCCUPIED BANDWIDTH PLOTS	22
10.2. BAND EDGE EMISSIONS	24
10.2.1. BAND EDGE PLOTS	25
10.3. OUT OF BAND EMISSIONS	27
10.3.1. OUT OF BAND EMISSIONS RESULT	27
10.3.2. OUT OF BAND EMISSIONS PLOTS.....	28
10.1. FREQUENCY STABILITY	30
10.1.1. FREQUENCY STABILITY RESULTS.....	31

11.	RADIATED TEST RESULTS	33
11.1.	<i>RADIATED POWER (ERP & EIRP).....</i>	33
11.1.1.	ERP/EIRP Results.....	34
11.1.2.	ERP/EIRP DATA.....	35
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	37
11.2.1.	SPURIOUS RADIATION PLOTS.....	38
12.	SETUP PHOTOS	42

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA Tablet + Bluetooth and DTS b/g/n
MODEL NUMBER: SM-T561Y
SERIAL NUMBER: R32G301WP2N (RADIATED); R32G301WPDV (CONDUCTED)
DATE TESTED: MARCH 11 - APRIL 20, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



Ji Ho Choi
Suwon Lab Manager
UL Korea, Ltd.

CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☐ Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Tablet + Bluetooth and DTS b/g/n.

5.2. MAXIMUM OUTPUT POWER (GSM)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
GSM850	824~849	GMSK	32.58	1809.62		
		GPRS	32.58	1812.72	26.72	469.89
		EGPRS	RX only			
GSM1900	1850~1910	GMSK	29.32	855.09		
		GPRS	29.32	855.17	31.44	1393.16
		EGPRS	RX only			

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 5	824~849	REL99	22.99	199.25	17.49	56.10
		HSDPA	21.79	151.13	16.48	44.46
		HSUPA	21.50	141.25		

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a FPCB antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM 850 / WCDMA Band 5 824 ~ 849 MHz	0.7
GSM 1900 1850 ~ 1910 MHz	5.5

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12EWE	N/A	N/A
Data Cable	SAMSUNG	ECB-DU68WC	N/A	N/A
Earphone	SAMSUNG	GH59-11129H	N/A	N/A

I/O CABLES (CONDUCTED SETUP)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	0.2m	NA
2	Antenna Port	1	EUT	Shielded	0.3m	NA
3	RF In/Out	1	Communication Test Set	Shielded	0.5m	NA

I/O CABLES (RADIATED SETUP)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

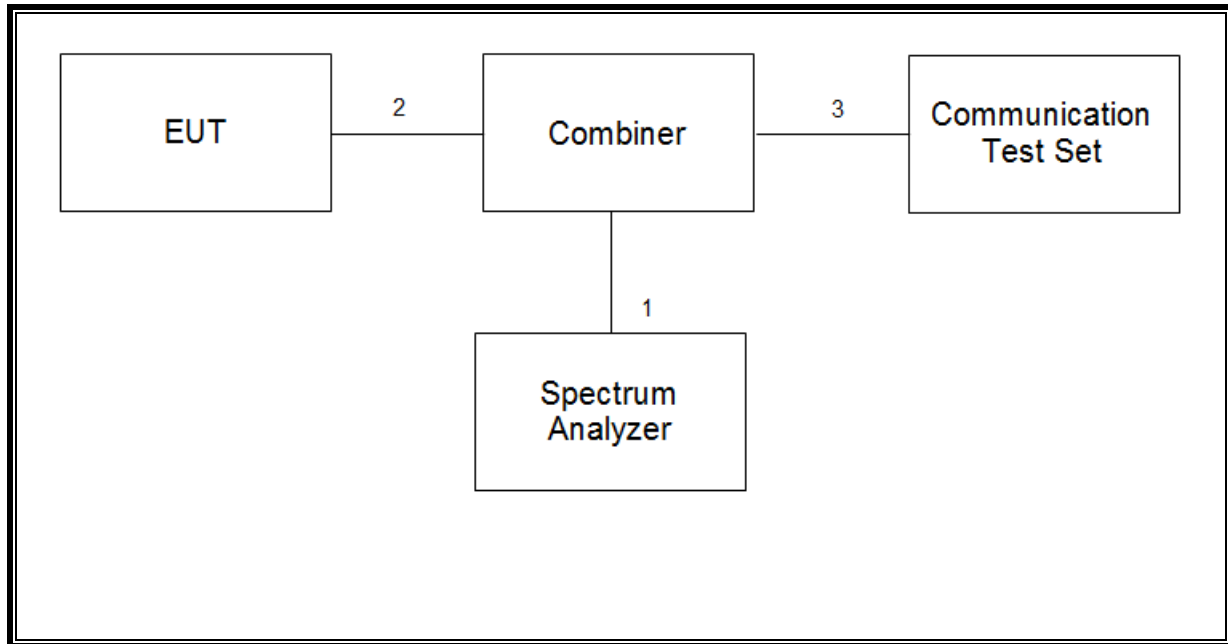

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

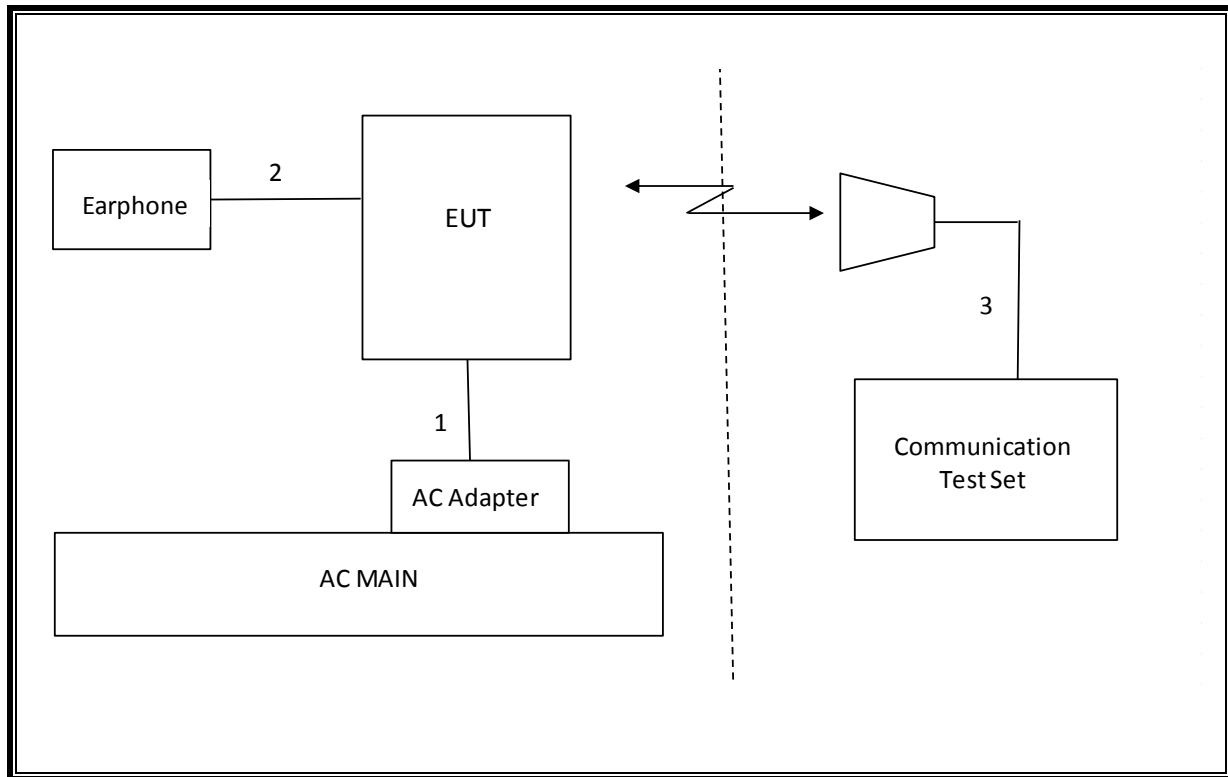

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	07-29-11
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	950	11-17-15
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	11-17-15
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	11-18-15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	09-23-15
Communications Test Set	R&S	CMW500	150312	08-13-15
Average Power Sensor	R&S	NRZ-Z91	102681	11-17-15
Average Power Sensor	Agilent / HP	U2000	MY54270007	09-23-15
EMI Test Receive, 40 GHz	R&S	ESU40	100439	11-17-15
EMI Test Receive, 3 GHz	R&S	ESR3	101832	11-17-15
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	11-17-15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	11-17-15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	11-17-15
Combiner	WEINSCHTEL	1575	2153	11-17-15
Temperature Chamber	ESPEC	SH-642	93001109	11-13-15
DC Power Supply	Agilent / HP	E3640A	MY54226395	09-23-15

7. Summary Table

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	4.099 MHz
22.917(a) 24.238(a)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-21.65 dBm
2.1046	Conducted output power	N/A		Pass	32.58 dBm
22.355 24.235	Frequency Stability	2.5PPM		Pass	0.035PPM
22.913(a)(2)	Effective Radiated Power	38 dBm	Radiated	Pass	26.72 dBm
24.232(c)	Equivalent Isotropic Radiated Power	33dBm		Pass	31.44 dBm
22.917(a) 24.238(a)	Radiated Spurious Emission	-13dBm		Pass	-36.7 dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Power		with Pwr Back-off	
						Burst Pwr (dBm)	Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	32.6	23.5	26.9	17.9
				190	836.6	32.5	23.4	27.0	18.0
				251	848.8	32.5	23.5	27.1	18.1
	GPRS (GMSK)	CS1	1	128	824.2	32.6	23.6	26.9	17.9
				190	836.6	32.5	23.5	27.0	18.0
				251	848.8	32.5	23.5	27.1	18.1
			2	128	824.2	31.0	25.0	24.9	18.9
				190	836.6	31.0	25.0	25.0	19.0
				251	848.8	31.1	25.1	25.1	19.1
			3	128	824.2	28.9	24.7	23.0	18.7
				190	836.6	29.0	24.8	23.1	18.8
				251	848.8	29.1	24.8	23.2	18.9
			4	128	824.2	26.9	23.9	20.9	17.9
				190	836.6	27.0	24.0	21.1	18.1
				251	848.8	27.1	24.1	21.2	18.2

EGPRS(8PSK) is Rx only

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Power		with Pwr Back-off	
						Burst Pwr (dBm)	Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	29.1	20.0	22.1	13.1
				661	1880.0	29.3	20.3	22.2	13.1
				810	1909.8	29.1	20.1	22.1	13.0
	GPRS (GMSK)	CS1	1	512	1850.2	29.1	20.0	22.1	13.1
				661	1880.0	29.3	20.3	22.1	13.1
				810	1909.8	29.1	20.1	22.1	13.0
			2	512	1850.2	26.8	20.7	20.1	14.1
				661	1880.0	26.8	20.8	20.2	14.2
				810	1909.8	26.7	20.7	20.1	14.1
			3	512	1850.2	24.2	19.9	18.1	13.8
				661	1880.0	24.2	20.0	18.1	13.9
				810	1909.8	24.2	19.9	18.0	13.7
			4	512	1850.2	22.3	19.2	17.1	14.1
				661	1880.0	22.3	19.3	17.1	14.1
				810	1909.8	22.2	19.2	17.1	14.0

EGPRS(8PSK) is Rx only

8.2. UMTS REL 99

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

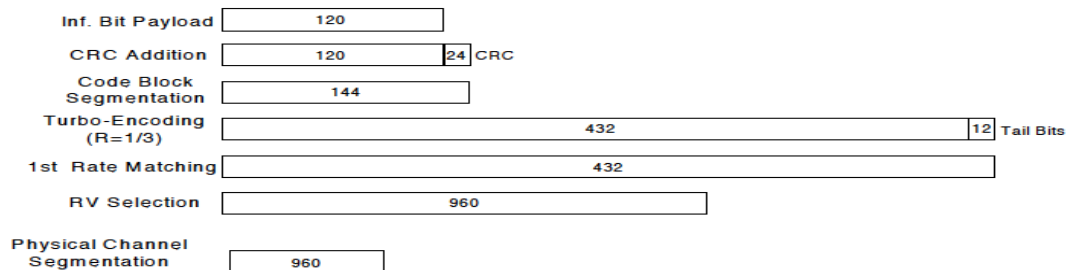


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)	
						Max	Pwr Back-off
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.0	19.0
			4183	836.6	N/A	22.9	19.3
			4233	846.6	N/A	22.6	19.4
	HSDPA	Subtest 1	4132	826.4	0	21.6	18.0
			4183	836.6	0	21.7	18.2
			4233	846.6	0	21.7	18.4
		Subtest 2	4132	826.4	0	21.6	18.1
			4183	836.6	0	21.7	18.3
			4233	846.6	0	21.7	18.3
		Subtest 3	4132	826.4	0.5	21.7	18.1
			4183	836.6	0.5	21.8	18.3
			4233	846.6	0.5	21.8	18.4
		Subtest 4	4132	826.4	0.5	21.6	18.1
			4183	836.6	0.5	21.7	18.3
			4233	846.6	0.5	21.7	18.3
	HSUPA	Subtest 1	4132	826.4	0	20.8	17.5
			4183	836.6	0	20.9	17.7
			4233	846.6	0	20.9	17.8
		Subtest 2	4132	826.4	2	18.9	17.5
			4183	836.6	2	19.1	17.3
			4233	846.6	2	19.0	17.4
		Subtest 3	4132	826.4	1	20.1	17.7
			4183	836.6	1	20.3	17.2
			4233	846.6	1	20.2	17.9
		Subtest 4	4132	826.4	2	19.7	17.5
			4183	836.6	2	19.8	17.5
			4233	846.6	2	19.7	17.7
		Subtest 5	4132	826.4	0	21.4	17.1
			4183	836.6	0	21.5	17.7
			4233	846.6	0	21.5	17.8

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT


GSM

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
GSM850	190	836.6	GPRS	2.60	13.00
			EGPRS	RX only	
GSM1900	661	1880.0	GPRS	2.61	
			EGPRS	RX only	

WCDMA

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 5	4183	836.6	REL99	2.96	13.00
			HSDPA	3.18	

9.2. CONDUCTED PEAK TO AVERAGE PLOTS

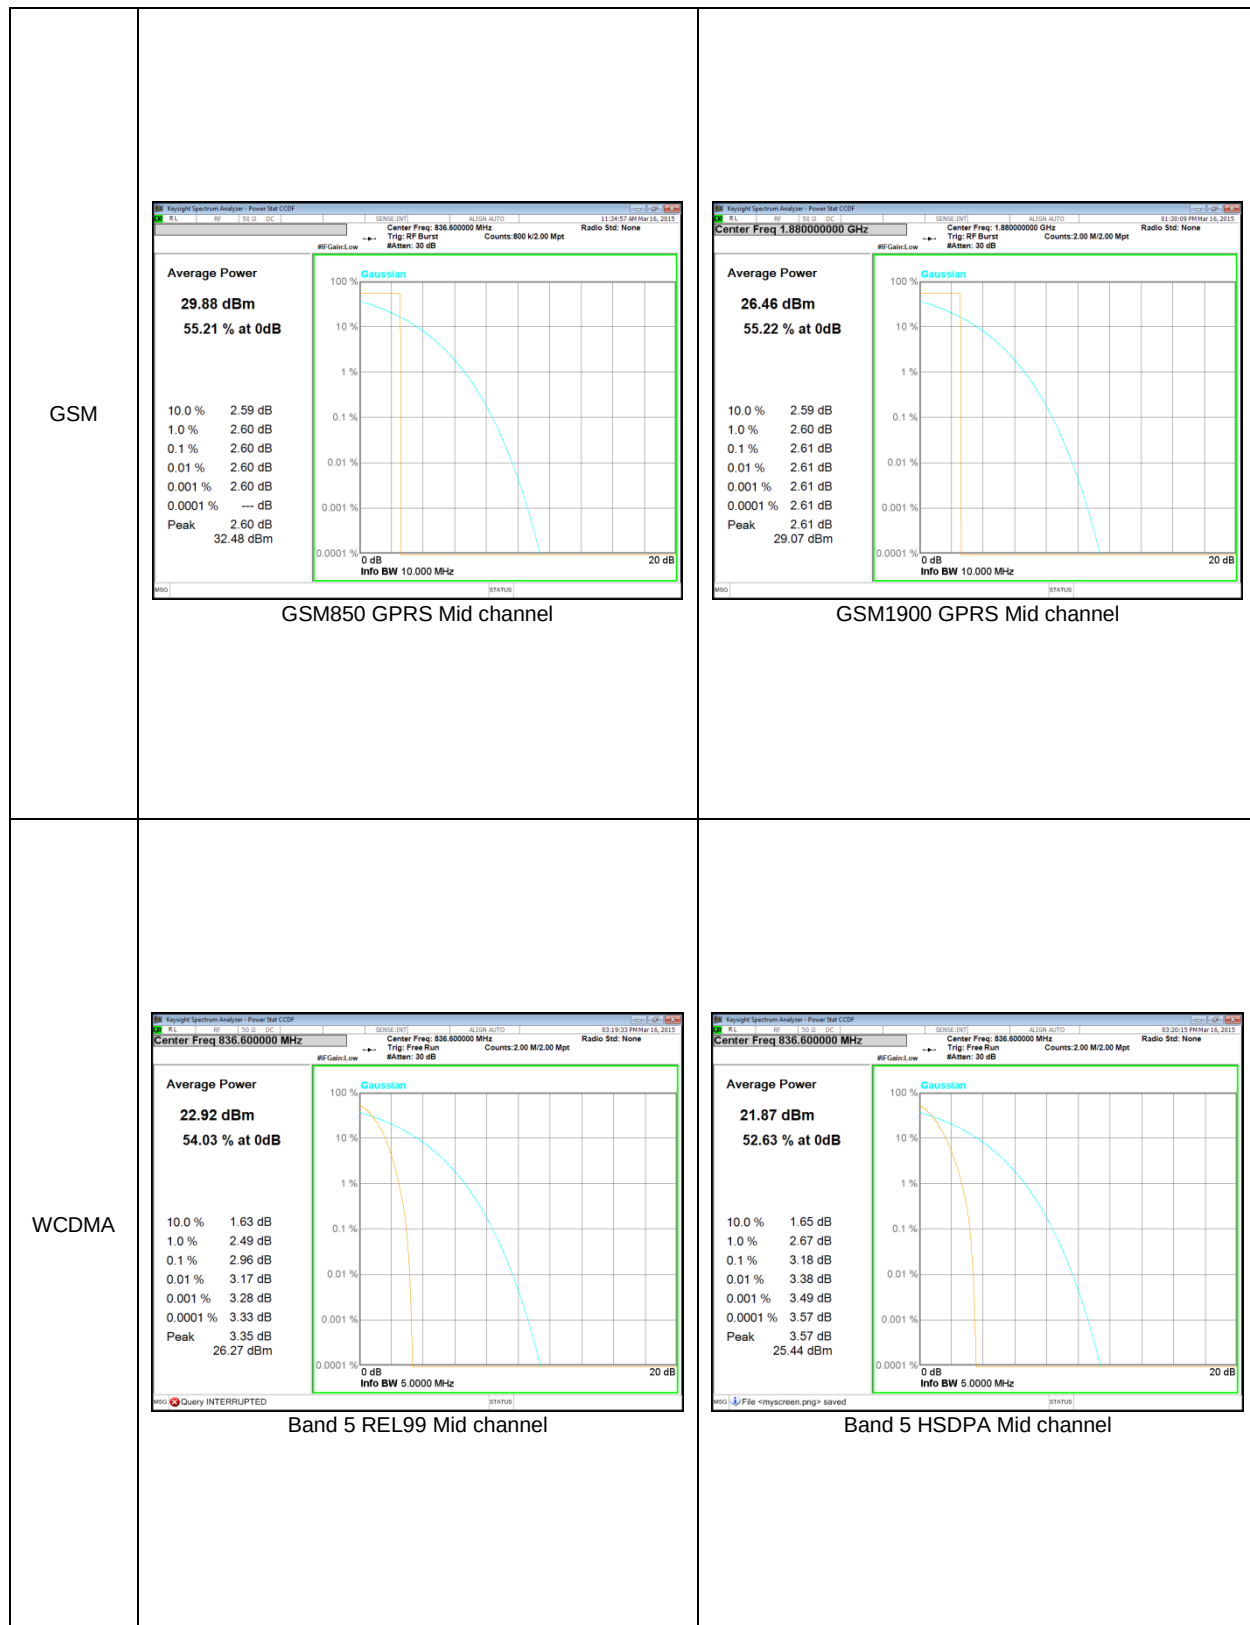

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM


Band	Mode	Channel	f [MHz]	99% BW [KHz]	26dB BW [KHz]
GSM850	GPRS	128	824.2	244.5	315.5
		190	836.6	245.6	318.6
		251	848.8	245.4	321.8
GSM1900	GPRS	512	1850.2	245.1	315.8
		661	1880.0	247.6	321.1
		810	1909.8	246.3	320.5

WCDMA

Band	Mode	Channel	f [MHz]	99% BW [MHz]	26dB BW [MHz]
Band 5	REL99	4132	826.4	4.081	4.641
		4183	836.6	4.089	4.637
		4233	846.6	4.093	4.649
	HSDPA	4132	826.4	4.083	4.634
		4183	836.6	4.099	4.656
		4233	846.6	4.078	4.637

10.1.2. OCCUPIED BANDWIDTH PLOTS

GSM

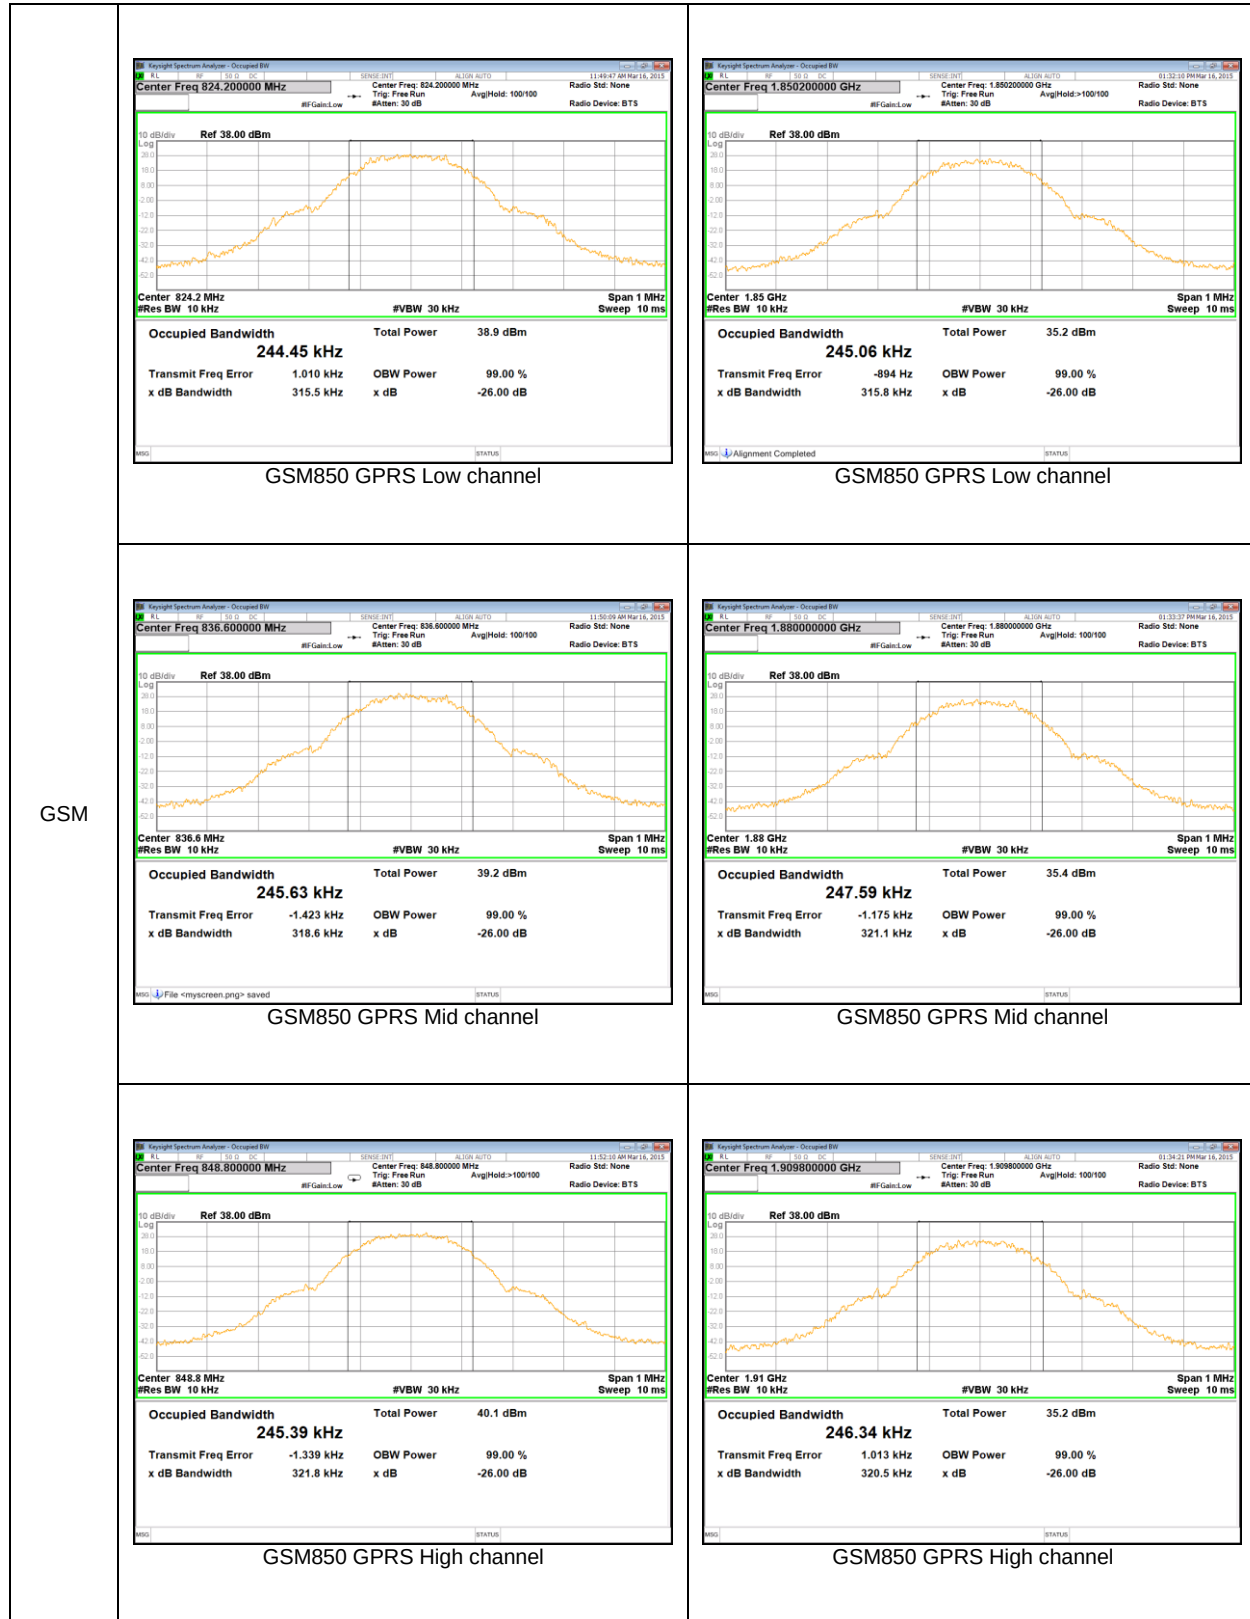

WCDMA



10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

GSM


Band	Mode	Side	f [MHz]	Level [dBm]	Limit [dBm]
GSM850	GPRS	Lower	823.9956	-21.65	-13.00
		Upper	849.0269	-24.60	
GSM1900	GPRS	Lower	1849.9892	-28.86	
		Upper	1910.0247	-27.14	

WCDMA


Band	Mode	Side	f [MHz]	Level [dBm]	Limit [dBm]
Band 5	REL99	Lower	823.8350	-29.64	-13.00
		Upper	849.1067	-30.92	
	HSDPA	Lower	823.8779	-27.27	
		Upper	849.0880	-28.03	

10.2.1. BAND EDGE PLOTS

GSM

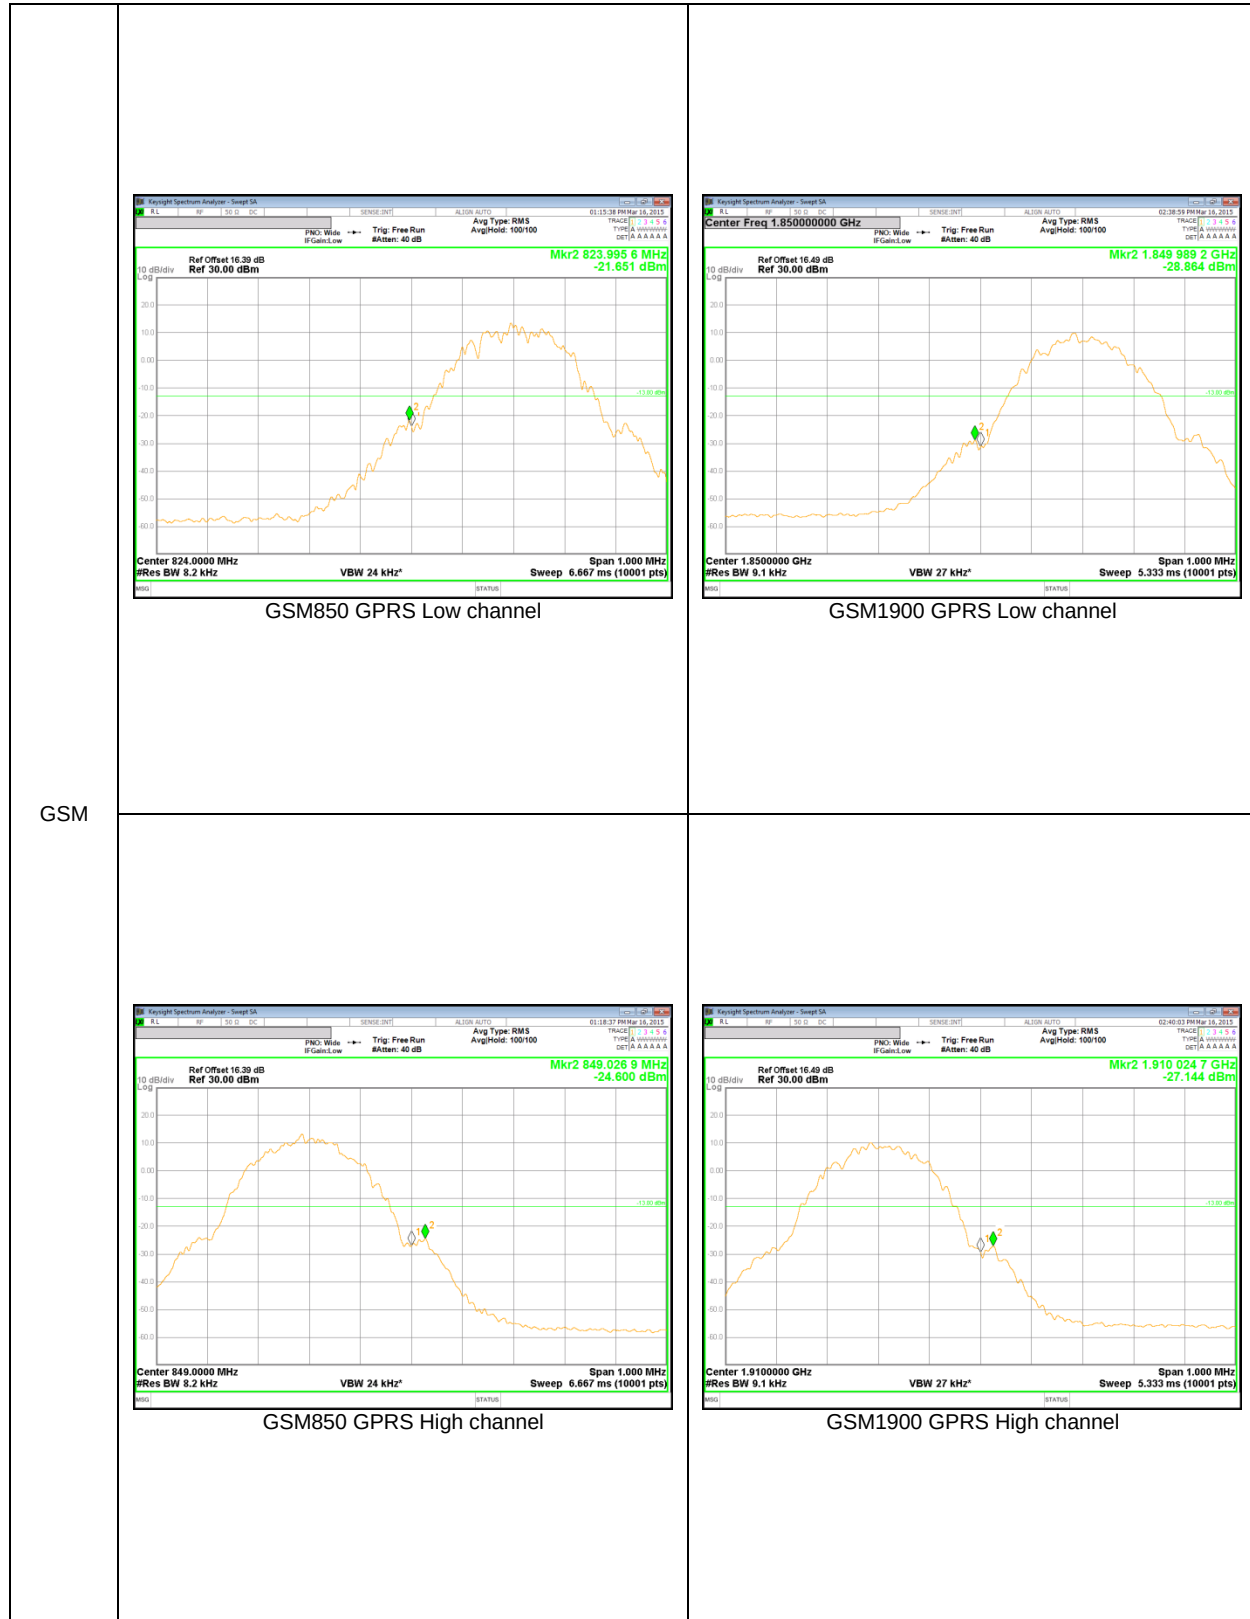

WCDMA

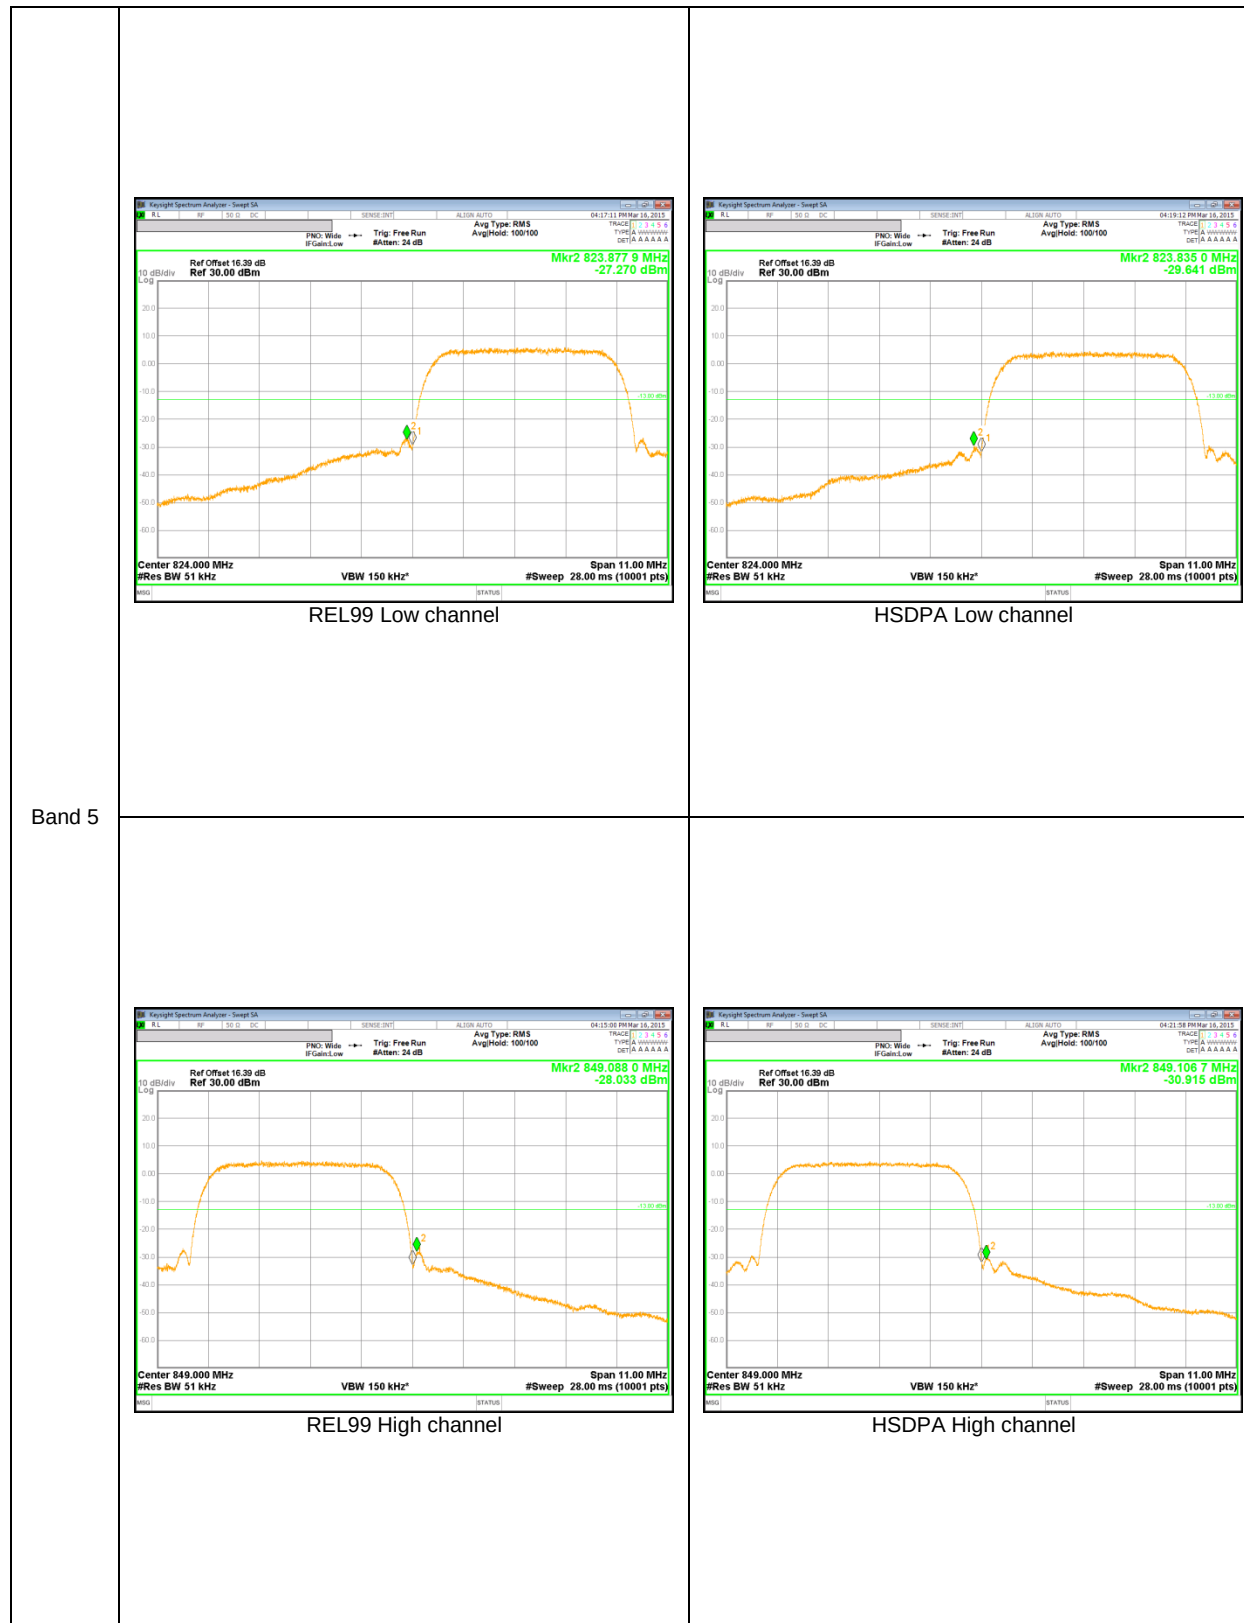

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

GSM


Band	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]	Margin [dB]
GSM850	GPRS	824.2	-27.21	-13.00	14.21
		836.6	-27.55		14.55
		848.8	-27.51		14.51
GSM1900	GPRS	1850.2	-26.48		13.48
		1880.0	-26.32		13.32
		1909.8	-26.76		13.76

WCDMA


Band	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]	Margin [dB]
Band 5	REL99	826.4	-32.72	-13.00	19.72
		836.6	-34.09		21.09
		846.6	-33.03		20.03
	HSDPA	826.4	-33.57		20.57
		836.6	-33.97		20.97
		846.6	-33.49		20.49

10.3.2. OUT OF BAND EMISSIONS PLOTS

GSM

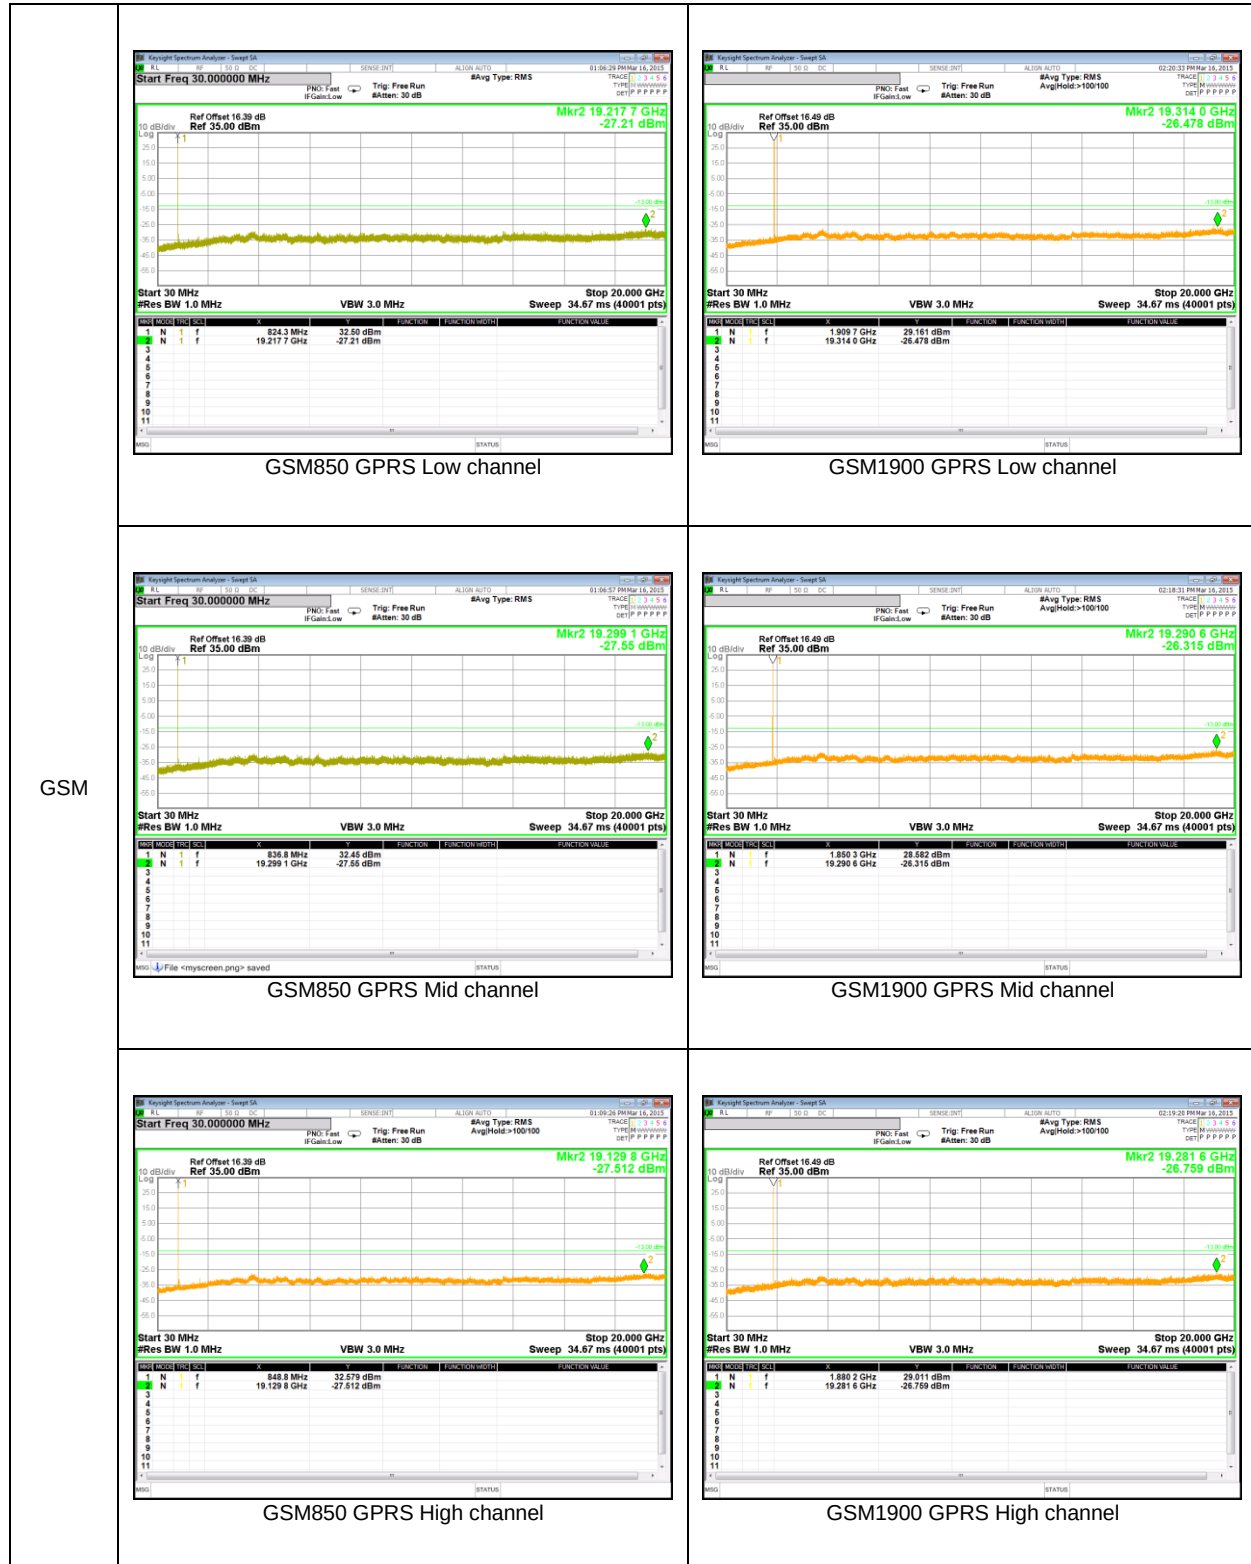

WCDMA Band 5

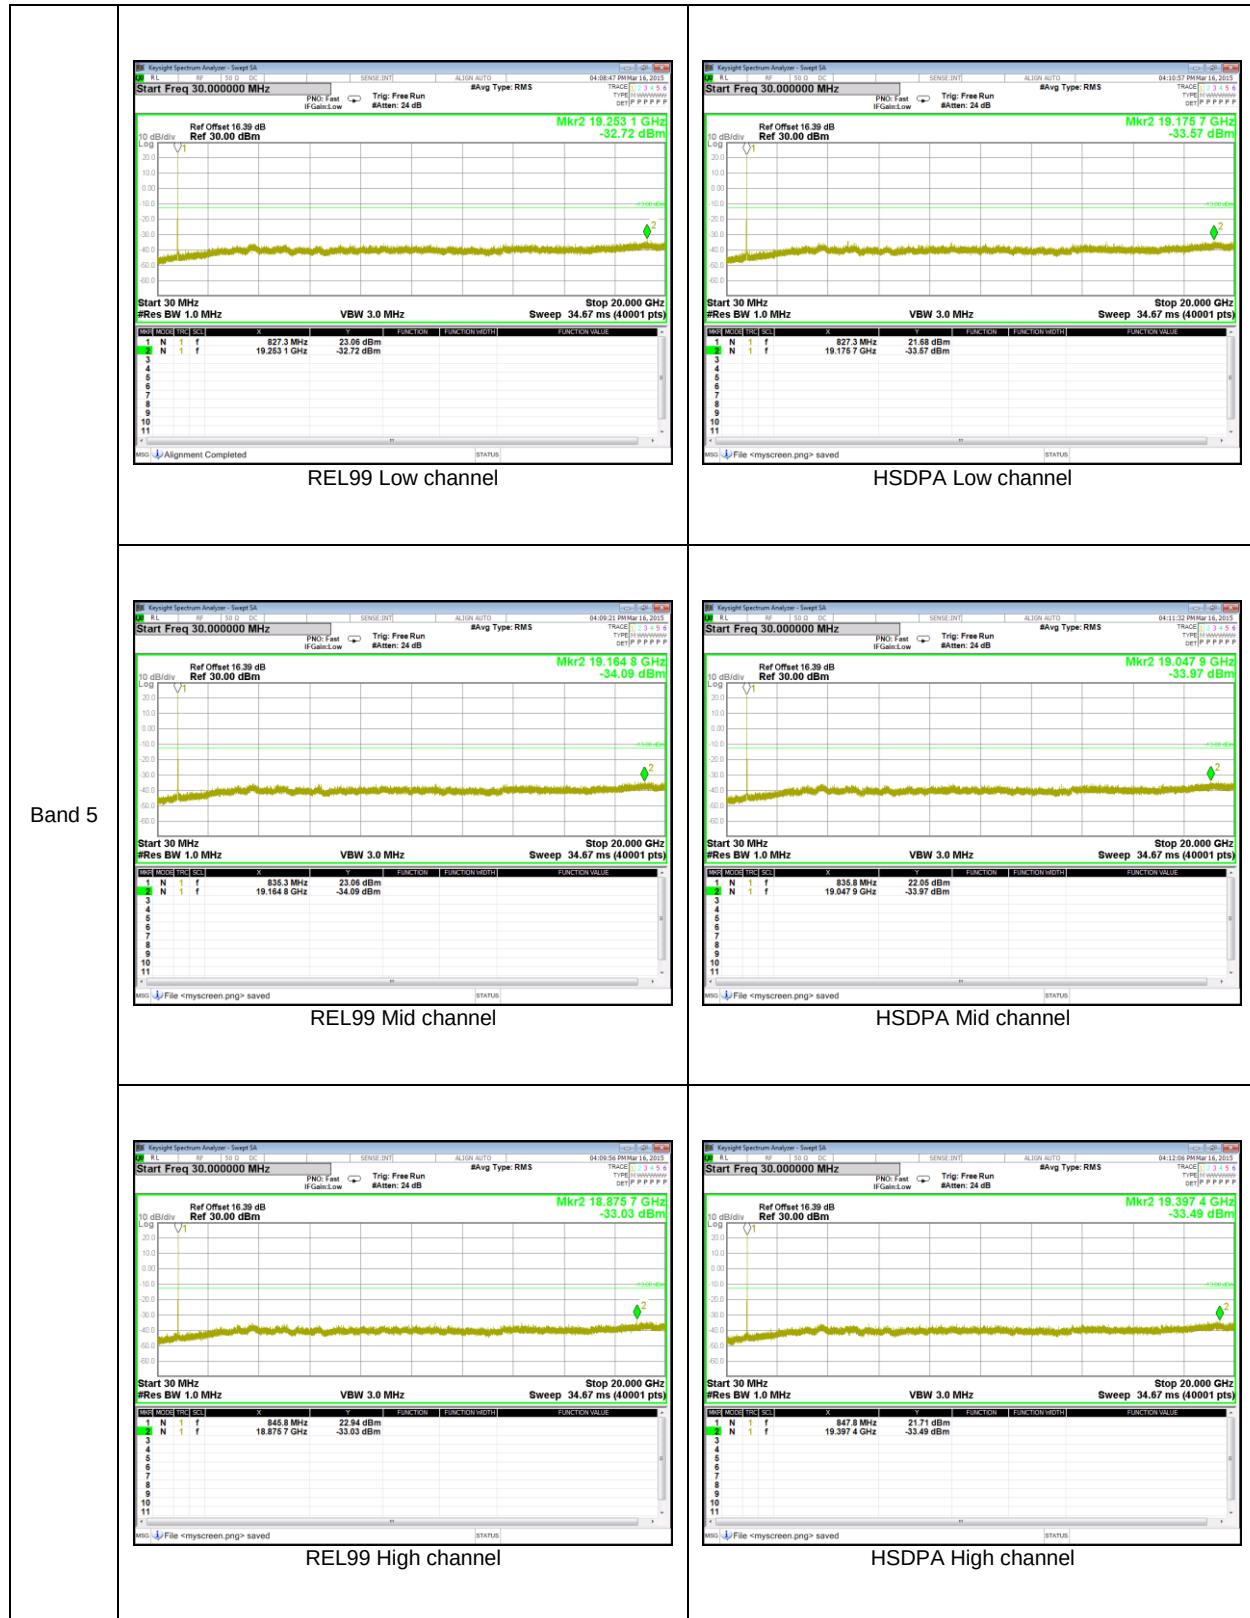

10.1. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

RESULTS

See the following pages.

10.1.1. FREQUENCY STABILITY RESULTS

GSM 850, Channel 190, Frequency 836.6 MHz

Reference Frequency: GSM 850 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.59998386	0.030	2.5
3.80	40	836.60000981	-0.001	2.5
3.80	30	836.59998589	0.028	2.5
3.80	20	836.60000933	0	2.5
3.80	10	836.60001124	-0.002	2.5
3.80	0	836.60000898	0.000	2.5
3.80	-10	836.59999025	0.023	2.5
3.80	-20	836.59998906	0.024	2.5
3.80	-30	836.59998957	0.024	2.5

Reference Frequency: GSM 850 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.250 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.60000933	0	2.5
4.20	20	836.59999093	0.022	2.5
3.40	20	836.60000736	0.002	2.5

GSM 1900, Channel 661, Frequency 1880 MHz

Reference Frequency: GSM 1900 Mid Channel 1880 MHz @ 20°C				
Limit: +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.99994324	0.021	2.5
3.80	40	1880.00002735	-0.023	2.5
3.80	30	1879.99996268	0.011	2.5
3.80	20	1879.99998324	0	2.5
3.80	10	1879.99997043	0.007	2.5
3.80	0	1879.99994870	0.018	2.5
3.80	-10	1880.00004966	-0.035	2.5
3.80	-20	1879.99994050	0.023	2.5
3.80	-30	1879.99994737	0.019	2.5

Reference Frequency: GSM 1900 Mid Channel 1880 MHz @ 20°C				
Limit: +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.99998324	0	2.5
4.20	20	1879.99998195	0.001	2.5
3.40	20	1880.00001317	-0.016	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; MXA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (i.e., RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	512	824.2	25.92	390.4
		661	836.6	26.21	417.3
		810	848.8	26.72	469.6
GSM1900	GPRS	512	1850.2	30.70	1174.4
		661	1880.0	31.44	1393.2
		810	1909.8	31.10	1289.1

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	17.49	56.0
		4183	836.6	16.77	47.5
		4233	846.6	16.70	46.7
	HSDPA	4132	826.4	14.59	28.7
		4183	836.6	15.42	34.8
		4233	846.6	16.48	44.4

11.1.2. ERP/EIRP DATA

GSM

Band

GSM850

GPRS

High Frequency Substitution Measurement

UL Korea, Ltd. Suwon Laboratory Chamber 1

Company:

Samsung

Project #:

15K20294

Date:

March 11, 2015

Test Engineer:

Steven.Kim

Configuration:

EUT ONLY, X Position

Mode:

GPRS 850 MHz

Test Equipment:

Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT)

Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	22.47	V	1.1	-1.6	19.85	38.5	-18.6	
824.20	28.54	H	1.1	-1.6	25.92	38.5	-12.5	
Mid Ch								
836.60	22.14	V	1.1	-1.4	19.65	38.5	-18.8	
836.60	28.70	H	1.1	-1.4	26.21	38.5	-12.2	
High Ch								
848.80	21.48	V	1.1	-1.3	19.12	38.5	-19.3	
848.80	29.08	H	1.1	-1.3	26.72	38.5	-11.7	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

GSM

Band

GSM1900

GPRS

High Frequency Substitution Measurement

UL Korea, Ltd. Suwon Laboratory Chamber 1

Company:

Samsung

Project #:

15K20294

Date:

March 11, 2015

Test Engineer:

Steven.Kim

Configuration:

EUT ONLY, X Position

Mode:

GPRS 1900MHz

Test Equipment:

Receiving: 3117, and Chamber 1 SMA Cables

Substitution: 3115 Substitution, 3m SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1850.20	15.6	V	1.60	9.12	23.13	33.0	-9.9	
1850.20	23.2	H	1.60	9.12	30.70	33.0	-2.3	
Mid Ch								
1880.00	21.9	V	1.62	8.98	29.28	33.0	-3.7	
1880.00	24.1	H	1.62	8.98	31.44	33.0	-1.6	
High Ch								
1909.80	16.9	V	1.63	8.83	24.11	33.0	-8.9	
1909.80	23.9	H	1.63	8.83	31.10	33.0	-1.9	

Rev. 3.17.11

WCDMA Band 5 REL99	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 1																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		15K20294																																																																																															
	Date:		March 12, 2015																																																																																															
	Test Engineer:		Steven.Kim																																																																																															
	Configuration:		EUT ONLY, X Position																																																																																															
	Mode:		Rel 99_850 MHz																																																																																															
	Test Equipment:																																																																																																	
	Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT)																																																																																																	
	Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.																																																																																																	
<table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Margin (dB)</th><th></th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>826.40</td><td>14.26</td><td>V</td><td>1.1</td><td>-1.5</td><td>11.65</td><td>38.5</td><td>-26.8</td><td></td></tr><tr><td>826.40</td><td>20.10</td><td>H</td><td>1.1</td><td>-1.5</td><td>17.49</td><td>38.5</td><td>-21.0</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.60</td><td>13.07</td><td>V</td><td>1.1</td><td>-1.4</td><td>10.58</td><td>38.5</td><td>-27.9</td><td></td></tr><tr><td>836.60</td><td>19.26</td><td>H</td><td>1.1</td><td>-1.4</td><td>16.77</td><td>38.5</td><td>-21.7</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>846.60</td><td>11.79</td><td>V</td><td>1.1</td><td>-1.3</td><td>9.41</td><td>38.5</td><td>-29.0</td><td></td></tr><tr><td>846.60</td><td>19.08</td><td>H</td><td>1.1</td><td>-1.3</td><td>16.70</td><td>38.5</td><td>-21.8</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)		Low Ch									826.40	14.26	V	1.1	-1.5	11.65	38.5	-26.8		826.40	20.10	H	1.1	-1.5	17.49	38.5	-21.0		Mid Ch									836.60	13.07	V	1.1	-1.4	10.58	38.5	-27.9		836.60	19.26	H	1.1	-1.4	16.77	38.5	-21.7		High Ch									846.60	11.79	V	1.1	-1.3	9.41	38.5	-29.0		846.60	19.08	H	1.1	-1.3	16.70	38.5	-21.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)																																																																																											
Low Ch																																																																																																		
826.40	14.26	V	1.1	-1.5	11.65	38.5	-26.8																																																																																											
826.40	20.10	H	1.1	-1.5	17.49	38.5	-21.0																																																																																											
Mid Ch																																																																																																		
836.60	13.07	V	1.1	-1.4	10.58	38.5	-27.9																																																																																											
836.60	19.26	H	1.1	-1.4	16.77	38.5	-21.7																																																																																											
High Ch																																																																																																		
846.60	11.79	V	1.1	-1.3	9.41	38.5	-29.0																																																																																											
846.60	19.08	H	1.1	-1.3	16.70	38.5	-21.8																																																																																											
Rev. 3.17.11																																																																																																		

WCDMA Band 5 HSDPA	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 1																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		15K20294																																																																																															
	Date:		March 12, 2015																																																																																															
	Test Engineer:		Steven.Kim																																																																																															
	Configuration:		EUT ONLY, X Position																																																																																															
	Mode:		HSDPA_850 MHz																																																																																															
	Test Equipment:																																																																																																	
	Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT)																																																																																																	
	Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.																																																																																																	
<table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Margin (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>826.40</td><td>11.48</td><td>V</td><td>1.1</td><td>-1.5</td><td>8.87</td><td>38.5</td><td>-29.6</td><td></td></tr><tr><td>826.40</td><td>17.20</td><td>H</td><td>1.1</td><td>-1.5</td><td>14.59</td><td>38.5</td><td>-23.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.60</td><td>12.44</td><td>V</td><td>1.1</td><td>-1.4</td><td>9.95</td><td>38.5</td><td>-28.5</td><td></td></tr><tr><td>836.60</td><td>17.91</td><td>H</td><td>1.1</td><td>-1.4</td><td>15.42</td><td>38.5</td><td>-23.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>846.60</td><td>11.78</td><td>V</td><td>1.1</td><td>-1.3</td><td>9.40</td><td>38.5</td><td>-29.1</td><td></td></tr><tr><td>846.60</td><td>18.86</td><td>H</td><td>1.1</td><td>-1.3</td><td>16.48</td><td>38.5</td><td>-22.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									826.40	11.48	V	1.1	-1.5	8.87	38.5	-29.6		826.40	17.20	H	1.1	-1.5	14.59	38.5	-23.9		Mid Ch									836.60	12.44	V	1.1	-1.4	9.95	38.5	-28.5		836.60	17.91	H	1.1	-1.4	15.42	38.5	-23.0		High Ch									846.60	11.78	V	1.1	-1.3	9.40	38.5	-29.1		846.60	18.86	H	1.1	-1.3	16.48	38.5	-22.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
Low Ch																																																																																																		
826.40	11.48	V	1.1	-1.5	8.87	38.5	-29.6																																																																																											
826.40	17.20	H	1.1	-1.5	14.59	38.5	-23.9																																																																																											
Mid Ch																																																																																																		
836.60	12.44	V	1.1	-1.4	9.95	38.5	-28.5																																																																																											
836.60	17.91	H	1.1	-1.4	15.42	38.5	-23.0																																																																																											
High Ch																																																																																																		
846.60	11.78	V	1.1	-1.3	9.40	38.5	-29.1																																																																																											
846.60	18.86	H	1.1	-1.3	16.48	38.5	-22.0																																																																																											
Rev. 3.17.11																																																																																																		

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

GSM Band GSM850 GPRS	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																				
	Company:		Samsung																																																																																																																																																																																																																																		
	Project #:		15K20294																																																																																																																																																																																																																																		
	Date:		March 11, 2015																																																																																																																																																																																																																																		
	Test Engineer:		Steven.Kim																																																																																																																																																																																																																																		
	Configuration:		EUT / AC Adapter / Earphone, X Position																																																																																																																																																																																																																																		
	Mode:		GPRS 850 MHz																																																																																																																																																																																																																																		
Chamber Pre-amplifier Filter Limit Chamber 1 AFS42 Filter 1 Part 22																																																																																																																																																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch, 824.2MHz</td></tr> <tr> <td>1.6484</td><td>-5.6</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-44.8</td><td>-13.0</td><td>-31.8</td><td></td></tr> <tr> <td>2.4726</td><td>-3.3</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-42.4</td><td>-13.0</td><td>-29.4</td><td></td></tr> <tr> <td>3.2968</td><td>-13.6</td><td>V</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-52.2</td><td>-13.0</td><td>-39.2</td><td></td></tr> <tr> <td>1.6484</td><td>0.4</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-38.8</td><td>-13.0</td><td>-25.8</td><td></td></tr> <tr> <td>2.4726</td><td>0.3</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-38.8</td><td>-13.0</td><td>-25.8</td><td></td></tr> <tr> <td>3.2968</td><td>-5.4</td><td>H</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-44.0</td><td>-13.0</td><td>-31.0</td><td></td></tr> <tr> <td colspan="10">Mid Ch, 836.6MHz</td></tr> <tr> <td>1.6730</td><td>-13.6</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-52.8</td><td>-13.0</td><td>-39.8</td><td></td></tr> <tr> <td>2.5098</td><td>-5.7</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-44.7</td><td>-13.0</td><td>-31.7</td><td></td></tr> <tr> <td>3.3464</td><td>-5.5</td><td>V</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-44.1</td><td>-13.0</td><td>-31.1</td><td></td></tr> <tr> <td>1.6730</td><td>-6.5</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-45.7</td><td>-13.0</td><td>-32.7</td><td></td></tr> <tr> <td>2.5098</td><td>0.5</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-38.5</td><td>-13.0</td><td>-25.5</td><td></td></tr> <tr> <td>3.3464</td><td>-4.6</td><td>H</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-43.1</td><td>-13.0</td><td>-30.1</td><td></td></tr> <tr> <td colspan="10">High Ch, 848.8MHz</td></tr> <tr> <td>1.6976</td><td>-8.6</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-47.8</td><td>-13.0</td><td>-34.8</td><td></td></tr> <tr> <td>2.5466</td><td>-7.1</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-46.2</td><td>-13.0</td><td>-33.2</td><td></td></tr> <tr> <td>3.3952</td><td>-8.4</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-46.9</td><td>-13.0</td><td>-33.9</td><td></td></tr> <tr> <td>1.6976</td><td>-6.6</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-45.7</td><td>-13.0</td><td>-32.7</td><td></td></tr> <tr> <td>2.5466</td><td>0.1</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-38.9</td><td>-13.0</td><td>-25.9</td><td></td></tr> <tr> <td>3.3952</td><td>-5.8</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-44.3</td><td>-13.0</td><td>-31.3</td><td></td></tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 824.2MHz										1.6484	-5.6	V	3.0	40.2	1.0	-44.8	-13.0	-31.8		2.4726	-3.3	V	3.0	40.1	1.0	-42.4	-13.0	-29.4		3.2968	-13.6	V	3.0	39.6	1.0	-52.2	-13.0	-39.2		1.6484	0.4	H	3.0	40.2	1.0	-38.8	-13.0	-25.8		2.4726	0.3	H	3.0	40.1	1.0	-38.8	-13.0	-25.8		3.2968	-5.4	H	3.0	39.6	1.0	-44.0	-13.0	-31.0		Mid Ch, 836.6MHz										1.6730	-13.6	V	3.0	40.2	1.0	-52.8	-13.0	-39.8		2.5098	-5.7	V	3.0	40.1	1.0	-44.7	-13.0	-31.7		3.3464	-5.5	V	3.0	39.6	1.0	-44.1	-13.0	-31.1		1.6730	-6.5	H	3.0	40.2	1.0	-45.7	-13.0	-32.7		2.5098	0.5	H	3.0	40.1	1.0	-38.5	-13.0	-25.5		3.3464	-4.6	H	3.0	39.6	1.0	-43.1	-13.0	-30.1		High Ch, 848.8MHz										1.6976	-8.6	V	3.0	40.2	1.0	-47.8	-13.0	-34.8		2.5466	-7.1	V	3.0	40.1	1.0	-46.2	-13.0	-33.2		3.3952	-8.4	V	3.0	39.5	1.0	-46.9	-13.0	-33.9		1.6976	-6.6	H	3.0	40.2	1.0	-45.7	-13.0	-32.7		2.5466	0.1	H	3.0	40.1	1.0	-38.9	-13.0	-25.9		3.3952	-5.8	H	3.0	39.5	1.0	-44.3	-13.0	-31.3	
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, 824.2MHz																																																																																																																																																																																																																																					
1.6484	-5.6	V	3.0	40.2	1.0	-44.8	-13.0	-31.8																																																																																																																																																																																																																													
2.4726	-3.3	V	3.0	40.1	1.0	-42.4	-13.0	-29.4																																																																																																																																																																																																																													
3.2968	-13.6	V	3.0	39.6	1.0	-52.2	-13.0	-39.2																																																																																																																																																																																																																													
1.6484	0.4	H	3.0	40.2	1.0	-38.8	-13.0	-25.8																																																																																																																																																																																																																													
2.4726	0.3	H	3.0	40.1	1.0	-38.8	-13.0	-25.8																																																																																																																																																																																																																													
3.2968	-5.4	H	3.0	39.6	1.0	-44.0	-13.0	-31.0																																																																																																																																																																																																																													
Mid Ch, 836.6MHz																																																																																																																																																																																																																																					
1.6730	-13.6	V	3.0	40.2	1.0	-52.8	-13.0	-39.8																																																																																																																																																																																																																													
2.5098	-5.7	V	3.0	40.1	1.0	-44.7	-13.0	-31.7																																																																																																																																																																																																																													
3.3464	-5.5	V	3.0	39.6	1.0	-44.1	-13.0	-31.1																																																																																																																																																																																																																													
1.6730	-6.5	H	3.0	40.2	1.0	-45.7	-13.0	-32.7																																																																																																																																																																																																																													
2.5098	0.5	H	3.0	40.1	1.0	-38.5	-13.0	-25.5																																																																																																																																																																																																																													
3.3464	-4.6	H	3.0	39.6	1.0	-43.1	-13.0	-30.1																																																																																																																																																																																																																													
High Ch, 848.8MHz																																																																																																																																																																																																																																					
1.6976	-8.6	V	3.0	40.2	1.0	-47.8	-13.0	-34.8																																																																																																																																																																																																																													
2.5466	-7.1	V	3.0	40.1	1.0	-46.2	-13.0	-33.2																																																																																																																																																																																																																													
3.3952	-8.4	V	3.0	39.5	1.0	-46.9	-13.0	-33.9																																																																																																																																																																																																																													
1.6976	-6.6	H	3.0	40.2	1.0	-45.7	-13.0	-32.7																																																																																																																																																																																																																													
2.5466	0.1	H	3.0	40.1	1.0	-38.9	-13.0	-25.9																																																																																																																																																																																																																													
3.3952	-5.8	H	3.0	39.5	1.0	-44.3	-13.0	-31.3																																																																																																																																																																																																																													
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																					

UL Korea, Ltd. Suwon Laboratory FORM ID: FCC_15C
218Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea TEL: (031) 337-9902 FAX: (031) 213-5433
UL Korea, Ltd. Confidential
This report shall not be reproduced except in full, without the written approval of UL Korea, Ltd.

WCDMA Band 5 REL99	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 15K20294 Date: March 11, 2015 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / X Position Mode: Tx, REL99,850MHz									
	Chamber		Pre-amplifier		Filter		Limit			
	Chamber 1		AFS42		Filter 1		Part 24			
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 826.40MHz									
	1.6520	-13.1	V	3.0	40.2	1.0	-52.3	-13.0	-39.3	
	2.4790	-17.6	V	3.0	40.1	1.0	-56.7	-13.0	-43.7	
	3.3056	-20.5	V	3.0	39.6	1.0	-59.1	-13.0	-46.1	
	1.6520	-8.9	H	3.0	40.2	1.0	-48.1	-13.0	-35.1	
2.4790	-13.4	H	3.0	40.1	1.0	-52.5	-13.0	-39.5		
3.3056	-19.9	H	3.0	39.6	1.0	-58.5	-13.0	-45.5		
Mid Ch, 836.6MHz										
1.6732	-18.6	V	3.0	40.2	1.0	-57.7	-13.0	-44.7		
2.5098	-15.9	V	3.0	40.1	1.0	-55.0	-13.0	-42.0		
3.3464	-19.7	V	3.0	39.6	1.0	-58.3	-13.0	-45.3		
1.6732	-12.0	H	3.0	40.2	1.0	-51.2	-13.0	-38.2		
2.5098	-16.2	H	3.0	40.1	1.0	-55.3	-13.0	-42.3		
3.3464	-19.4	H	3.0	39.6	1.0	-58.0	-13.0	-45.0		
High Ch, 846.6MHz										
1.6932	-17.9	V	3.0	40.2	1.0	-57.1	-13.0	-44.1		
2.5390	-19.9	V	3.0	40.1	1.0	-59.0	-13.0	-46.0		
3.3860	-18.7	V	3.0	39.5	1.0	-57.2	-13.0	-44.2		
1.6932	-11.1	H	3.0	40.2	1.0	-50.2	-13.0	-37.2		
2.5390	-18.9	H	3.0	40.1	1.0	-58.0	-13.0	-45.0		
3.3860	-18.2	H	3.0	39.5	1.0	-56.7	-13.0	-43.7		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

WCDMA Band 5 HSDPA	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 15K20294 Date: March 11, 2015 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / X Position Mode: Tx, HSDPA,850MHz									
	Chamber Chamber 1 Pre-amplifier AFS42 Filter Filter 1 Limit Part 24									
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 826.40MHz									
	1.6520	-15.9	V	3.0	40.2	1.0	-55.1	-13.0	-42.1	
	2.4790	-19.7	V	3.0	40.1	1.0	-58.8	-13.0	-45.8	
	3.3056	-23.0	V	3.0	39.6	1.0	-61.6	-13.0	-48.6	
	1.6520	-12.0	H	3.0	40.2	1.0	-51.2	-13.0	-38.2	
	2.4790	-17.5	H	3.0	40.1	1.0	-56.6	-13.0	-43.6	
3.3056	-23.4	H	3.0	39.6	1.0	-62.0	-13.0	-49.0		
Mid Ch, 836.6MHz										
1.6732	-20.0	V	3.0	40.2	1.0	-59.2	-13.0	-46.2		
2.5098	-16.4	V	3.0	40.1	1.0	-55.5	-13.0	-42.5		
3.3464	-20.9	V	3.0	39.6	1.0	-59.5	-13.0	-46.5		
1.6732	-14.6	H	3.0	40.2	1.0	-53.8	-13.0	-40.8		
2.5098	-18.0	H	3.0	40.1	1.0	-57.1	-13.0	-44.1		
3.3464	-20.8	H	3.0	39.6	1.0	-59.4	-13.0	-46.4		
High Ch, 846.6MHz										
1.6932	-18.6	V	3.0	40.2	1.0	-57.8	-13.0	-44.8		
2.5390	-20.0	V	3.0	40.1	1.0	-59.0	-13.0	-46.0		
3.3860	-18.5	V	3.0	39.5	1.0	-57.1	-13.0	-44.1		
1.6932	-12.3	H	3.0	40.2	1.0	-51.5	-13.0	-38.5		
2.5390	-19.0	H	3.0	40.1	1.0	-58.1	-13.0	-45.1		
3.3860	-17.6	H	3.0	39.5	1.0	-56.1	-13.0	-43.1		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										