

EMC TEST REPORT




Project No.	LBE20142157	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	April 4, 2014	
EUT	Type of device	<input checked="" type="checkbox"/> Class B personal computers and peripherals <input type="checkbox"/> All other devices	
	Equipment authorization	<input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification	
	FCC ID	A3LSMT700	
	Kind of product	Portable Device	
	Model No.	SM-T700	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	SAMSUNG ELECTRONICS CO., LTD. 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea SAMSUNG ELECTRONICS CO., LTD. SEVT 443-370 Yenphong 1-I.P, Yenprung Commune, Yenphong Dist., Bacninh Province Vietnam	
Applied Standards		FCC Part 15, Subpart B, Class B / ANSI C63.4-2009	
Test Period		April 21, 2014 ~ April 25, 2014	
Issue date		April 30, 2014	
Test result : Complied The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
Tested by : Sung-Wook Choi 		Reviewed by : Jong-Sup Jeong 	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.			
 (Maetan dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea Tel: 82 31 279 1750, Fax: 82 31 279 1745			

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	4
4.3 Details of Sampling	4
4.4 Used cable description	5
4.5 Test arrangement	5
4.6 EUT Description	6
4.7 Clock Frequencies	6
4.8 Test configuration and condition	7
4.9 Measurement uncertainty	7

5. Result of individual tests

5.1 Conducted disturbance	8
5.2 Radiated disturbance	10

1. Report Information

1.1 Revision history

No	Revised detailed information
Issue 0	- LBE20142157 (SAMSUNG)

2. Summary of test results

2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2009 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742 Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Portable Device	SM-T700	-	SAMSUNG	A3LSMT700
B	Battery	EB-BT705FBE	-	SAMSUNG	-
C	Headset	EO-HS3303WE	-	SAMSUNG	-
D	Data Cable	ECB-DU4AWE	SJ1D715DSE	SAMSUNG	-
E	microSD Card	32GB	-	SAMSUNG	-
F	Desk-Top Computer	DM300S3A	EBDEDC6FFD	SAMSUNG	DoC
			-	SAMSUNG	DoC
G	LCD TV Monitor	CF19MS	CF19H1LS700048Y	SAMSUNG	DoC
		EF23TS	EM23H1LS300070L	SAMSUNG	DoC
H	Mouse	SML-210PB	TAKD125021R	SAMSUNG	DoC
I	Keyboard	SDM8500P	8M001183	SAMSUNG	DoC
J	Gigabit Switch 8	J9794A	CN33FQ703Q	HP	DoC
			CN33FQ71XK	HP	DoC
K	Power Supply	EADP-15DC A	DIKD1245096741	Delta	DoC
			DIKD1245096576	Delta	DoC

This tablet device does not contain the minimum number of ports required for personal computer testing per ANSI C63.4, but the EUT is attached to a computer through its only available port, which represents worst case emissions. All other aspects of C63.4 testing requirements were maintained.

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
-------------------------	-------------------------------

4.3 Details of Sampling

Customer selected, single unit.

4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item	Specification
Operating Temperature (°C)	-20 ~ +60
Operating Humidity (%)	0 ~ 95

4.6.2 The variant models

- SM-T2556

4.7 Clock Frequencies

Kind of Clocks	Frequency [MHz]
CPU	1 900

4.8 Test configuration and condition

- The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- The EUT was connected to the PC by using USB data cable to charge.
- The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	3.12 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	4.03 dB
	Vertical	4.13 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	4.53 dB
	Vertical	4.51 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports

Frequency range Limits MHz	Resolution Bandwidth	Limits dB(μ V)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-010	LISN	ESH3-Z5	R&S	100263	2013-10-17	12
E5I-018	EMI Test Receiver	ESU8	R&S	100484	2013-06-12	12
E5I-043	LISN	ENV216	R&S	101630	2013-06-07	12

5.1.2 Temperature and humidity condition

Test date	2014-04-25	Test engineer	Sung-Wook Choi
Climate condition	Ambient temperature	23.1 °C	Limit (15.0 to 35.0) °C
	Relative humidity	39.6 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.7 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR14)		

5.1.3 Test results

- Operating Mode 1: AC Mains

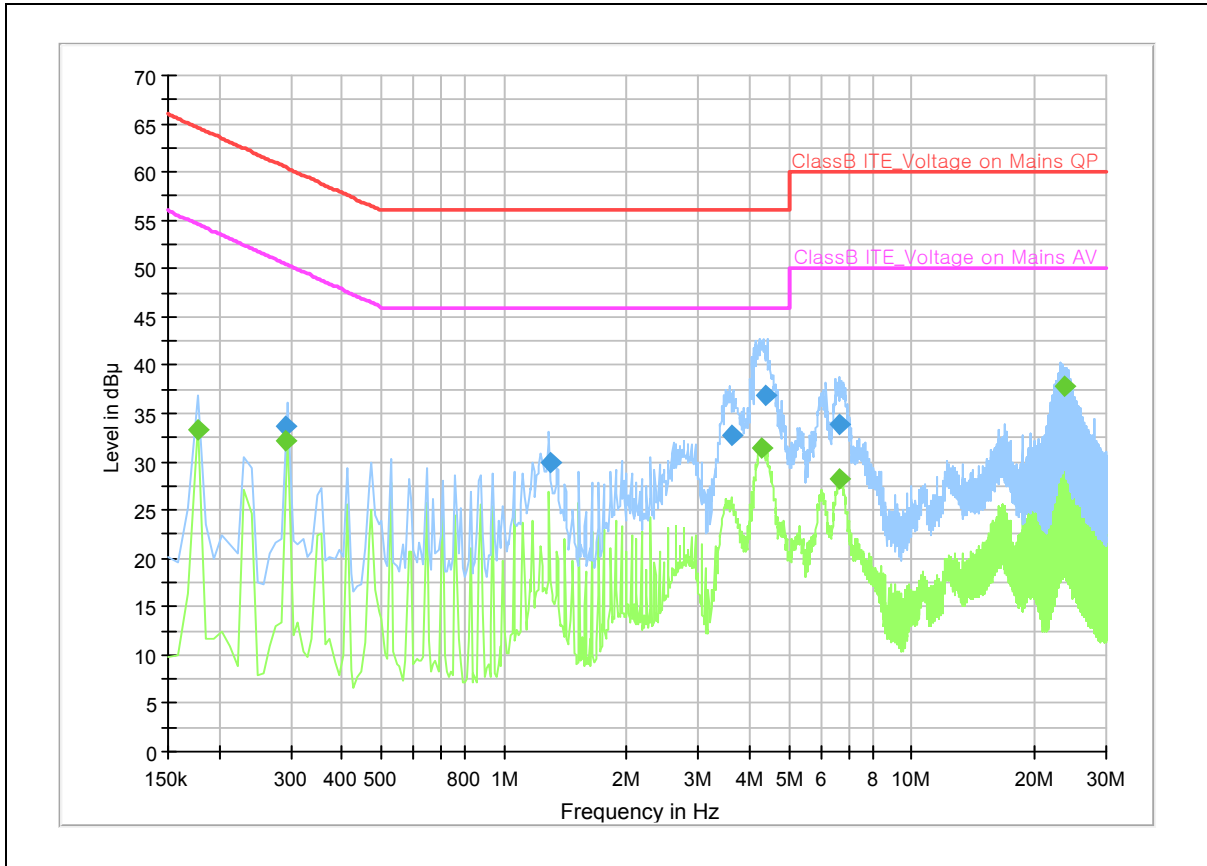

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak(QP) /CISPR-Average(CAV) final measurement results table:

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.178	---	33.4	54.6	21.2	L1	9.9
0.292	---	32.1	50.5	18.4	L1	9.9
0.292	33.7	---	60.5	26.8	L1	9.9
1.295	29.9	---	56.0	26.1	L1	9.8
3.608	32.7	---	56.0	23.3	L1	9.7
4.279	---	31.5	46.0	14.5	L1	9.7
4.385	37.0	---	56.0	19.0	L1	9.7
6.644	---	28.3	50.0	21.7	L1	9.8
6.645	33.9	---	60.0	26.1	L1	9.8
23.749	---	37.7	50.0	12.3	N	10.0

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/CISPR-average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency in accordance with internal maximum operating frequency at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1	3	0 ~ 345 (Step size: 15 degrees)

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and CISPR-average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-017	EMI Test Receiver	ESU8	R&S	100483	2013-06-11	12
E5I-021	EMI Test Receiver	ESU40	R&S	100376	2013-06-11	12
E5I-035	Horn Antenna	HF907	R&S	100506	2013-04-02	24
E5I-072	BiLog Antenna	CBL6112D	Teseq	36009	2013-06-03	24
E5I-071	BiLog Antenna	CBL6112D	Teseq	35384	2013-05-23	24
E5I-073	Preamplifier	310N	Sonoma	332016	2013-06-10	12
E5I-074	Preamplifier	310N	Sonoma	332017	2013-06-10	12


5.2.2 Temperature and humidity condition

Test date	2014-04-21	Test engineer	Sung-Wook Choi
Climate condition	Ambient temperature	21.5 °C	Limit (15.0 to 35.0) °C
	Relative humidity	38.6 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.2 kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC8)		

5.2.3 Test results

Operating Mode 1

- Frequencies below 1 GHz

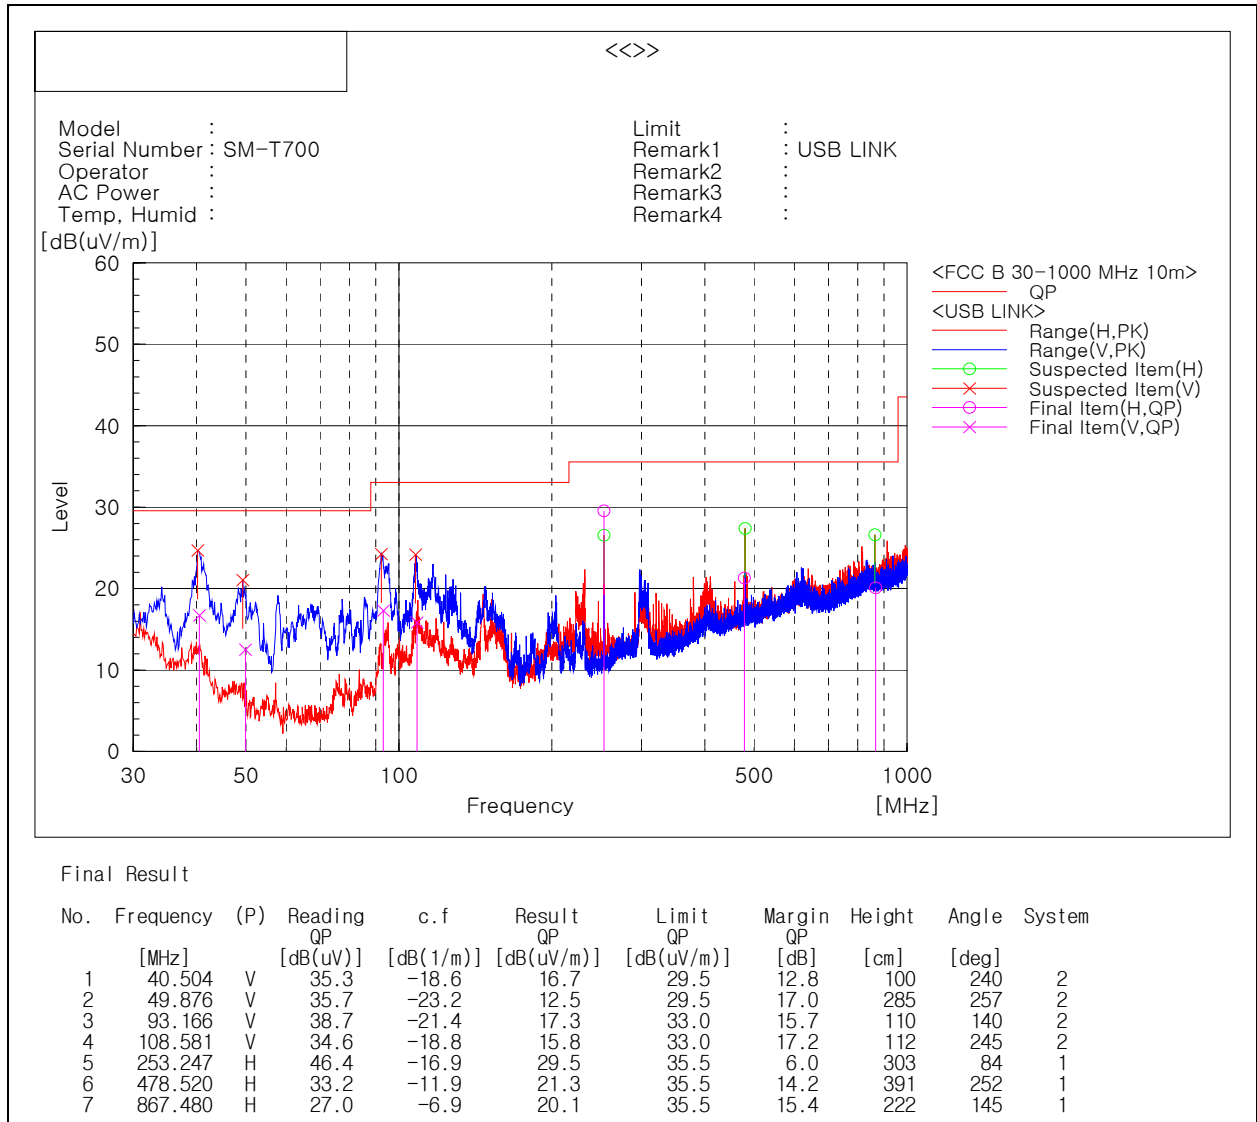


Note) Receiving antenna polarization : Horizontal, Vertical
 Test Distance : 10 m, Antenna Height : 1 to 4 meters
 Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)
 Margin (QP) = Limit - Level (QP)
 QP = Quasi-Peak, c.f = Correction Factor

5.2.3 Test results

Operating Mode 1

- Frequencies above 1 GHz

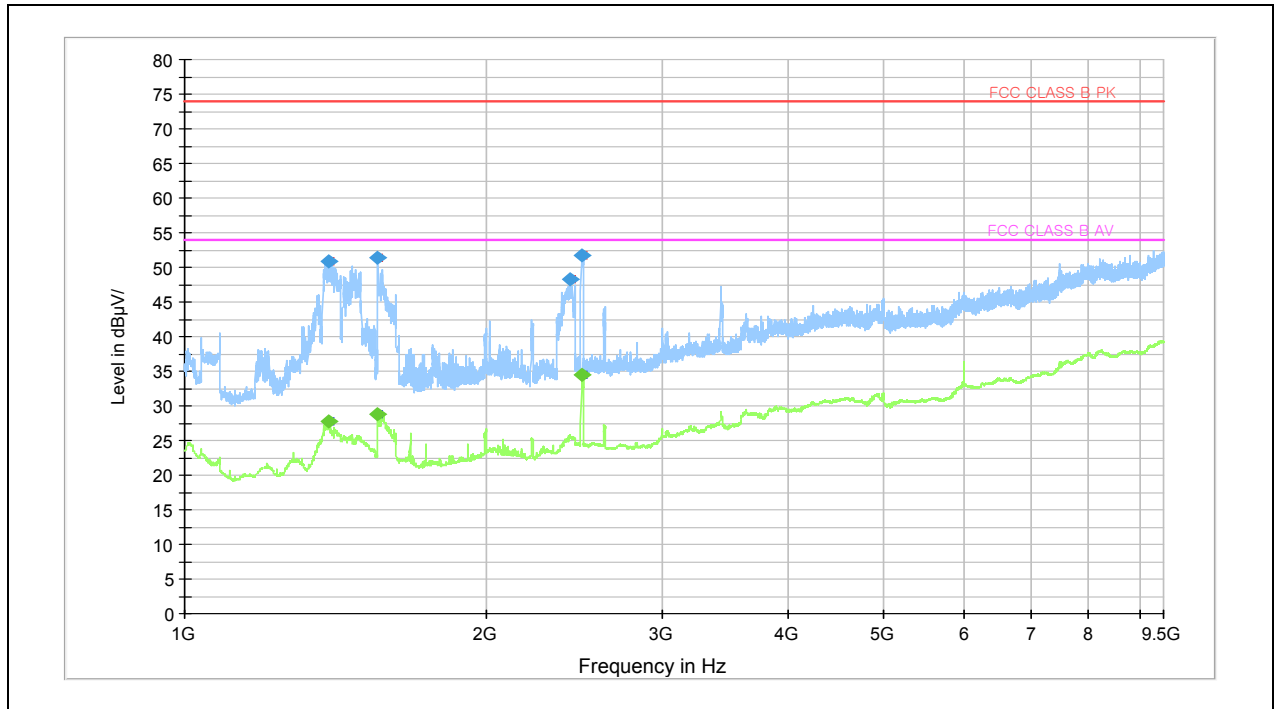

Final measurement results table(PK):

Frequency (MHz)	Level (dBuV/m)	Height (cm)	Polarisation	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1 395.500	50.8	100	V	150.0	-7.5	23.2	74.0
1 560.000	51.4	100	V	180.0	-6.2	22.6	74.0
2 423.000	48.3	100	H	45.0	-1.4	25.7	74.0
2 496.000	51.7	100	H	90.0	-0.8	22.3	74.0

Final measurement results table(CAV):

Frequency (MHz)	Level (dBuV/m)	Height (cm)	Polarisation	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1 393.500	27.7	100	V	180.0	-7.5	26.3	54.0
1 560.000	28.7	100	V	180.0	-6.2	25.3	54.0
2 496.000	34.5	100	H	75.0	-0.8	19.5	54.0

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor