

EMC TEST REPORT



Project No.	LBE20210197	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea	
	Date of receipt	March 29, 2021	
EUT	Type of device	<input checked="" type="checkbox"/> All other Receivers subject to part15 <input checked="" type="checkbox"/> Class B Personal Computers and peripherals <input checked="" type="checkbox"/> Other Class B digital devices and peripherals <input type="checkbox"/> FM Broadcast Receiver	
	Equipment authorization	<input checked="" type="checkbox"/> Certification <input type="checkbox"/> Supplier's Declaration of Conformity	
	FCC ID	A3LSMT736B	
	Kind of product	Portable Device	
	Model No.	SM-T736B	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	Samsung Electronics Vietnam Thai Nguyen Co., Ltd. Yen Binh Industrial Zone Pho Ten Dist., Thai Nguyen Province, Vietnam	
Applied Standards	47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014		
Test Period	March 29, 2021 ~ April 02, 2021		
Issue date	April 09, 2021		
Test result : Complied The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
Tested by : Ji-Yeon Lee 		Reviewed by : Sun-Ho Kim 	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from Global CS Center.			
Samsung Electronics Co Ltd, Global CS Center (Maetan dong) 129, Samsung-ro, Yeongtong-Gu, Suwon-Si, Gyeonggi-Do 16677, Korea			

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	5
4.3 Details of Sampling	5
4.4 Used cable description	6
4.5 Test arrangement	7
4.6 EUT Description	10
4.7 EUT Frequencies	10
4.8 Test configuration and condition	10
4.9 Measurement uncertainty	11

5. Result of individual tests

5.1 Conducted emission	12
5.2 Radiated emission	19

1. Report Information

1.1 Revision history

No.	Date of Issue	Revised detailed information
Issue 0	09 April 2021	There are no revisions and this version is basic test report.

※ Remark

Compliance with Part 15B requirements for the receiver part of the licensed transmitter (equipment code CXX) is covered by other test report.

2. Summary of test results

2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted emission (Mains port)	47 CFR Part 15 Subpart B / ANSI C63.4-2014 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated emission		Complied

3. General Information

3.1 Test facility

The Global CS Center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 32, CISPR 16-1-4 and Shielded rooms. And all antennas are properly calibrated using ANSI C63.5:2017.

The Global CS Center is an ISO/IEC 17025 accredited testing laboratory by the National Radio Research Agency with designation No. KR0004. for EMC testing.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID
A	Portable Device	SM-T736B	-	SAMSUNG	A3LSMT736B
B	Battery	EB-BT975ABY	-	SDI	-
C	Headset	GHSS028-K7	-	BUJEON	-
D	Data Cable	EP-DT725	-	KSD	-
E	Micro SD Card	64 GB	-	SAMSUNG	DoC
F	Laptop Computer	Latitude5580	1WYRYM2	Dell	DoC
			D3HRYM2	Dell	DoC
G	Laptop AC Adapter	LA65NM130	5DEA	Dell	DoC
			5B3C	Dell	DoC
H	Mouse	AA-SM7PCPB	CN57BA5903634ADV8J JCD4371	SAMSUNG	DoC
		SNJ-B138	Z5F8353	SAMSUNG	DoC
I	Router	DIR-806A	RF0F1D8018454	D-Link	DoC
			RF0F1D8011504	D-Link	DoC
J	Travel Adapter	EP-TA200	R37NALK0ZP1RC3	Elentec	-
K	DP Monitor	27UD88	711NTQD8H004	LG	DoC
L	DP Monitor AC Adapter	LCAP31	EH8NN629490055062	LG	DoC
M	DP Cable	JCA141	BW2K1709000770	J5CREATE	DoC
N	S-Pen	CP-911-08B	-	Wacom	-
O	Book cover keyboard	EF-DT730	-	SAMSUNG	DoC

This tablet device does not contain the minimum number of ports required for personal computer testing per ANSI C63.4, but the EUT is attached to a computer through its only available port, which represents worst case emissions. All other aspects of C63.4 testing requirements were maintained.

4.2 EUT operating mode

To achieve compliance applied standard specification including CXX, JAB and JBP requirement, the following mode(s) were made during compliance testing:

4.2.1 Conducted emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + Cellular receiver (LTE FDD26 Center Frequency) + Book cover keyboard (Pogo pin)
2	Camera (front) + Charging (w/ TA) + Book cover keyboard (Pogo pin)
3	Video + Audio playback from internal memory data + Charging (w/ TA) + Book cover keyboard (Pogo pin)
4	USB Data Communication with PC (from external memory data) + Book cover keyboard (Pogo pin)

4.2.2 Radiated emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + Book cover keyboard (Pogo pin)
2	Camera (front) (w/ Headset) + Book cover keyboard (Pogo pin)
3	Video + Audio playback from internal memory data (w/ Headset) + Book cover keyboard (Pogo pin)
4	Video + Audio playback from internal memory data + Display out (w/ USB to Direct DP Cable) + Book cover keyboard (Pogo pin)
5	USB Data Communication with PC (from external memory data) + Book cover keyboard (Pogo pin)

4.3 Details of Sampling

Customer selected, single unit.

4.4 Used cable description


The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	1.0	Y	From EUT to Travel Adapter or Laptop Computer
2	Headset	1.3	N	For EUT
3	Power	1.8	N	From Laptop Computer to Laptop AC Adapter
4	Power	1.5	N	For Laptop AC Adapter
5	LAN	1.5	N	From Laptop Computer to Router
6	USB	0.8	Y	From Laptop Computer to Router for DC Power
7	USB	1.8	Y	From Laptop Computer to Mouse
8	DP Cable	1.1	Y	From EUT to DP Monitor
9	Power	1.2	N*)	From DP Monitor to DP Monitor AC Adapter
10	Power	1.8	N	For DP Monitor AC Adapter


*) : 2 ferrite cores are used.

4.5 Test arrangement

4.5.1 Conducted emission

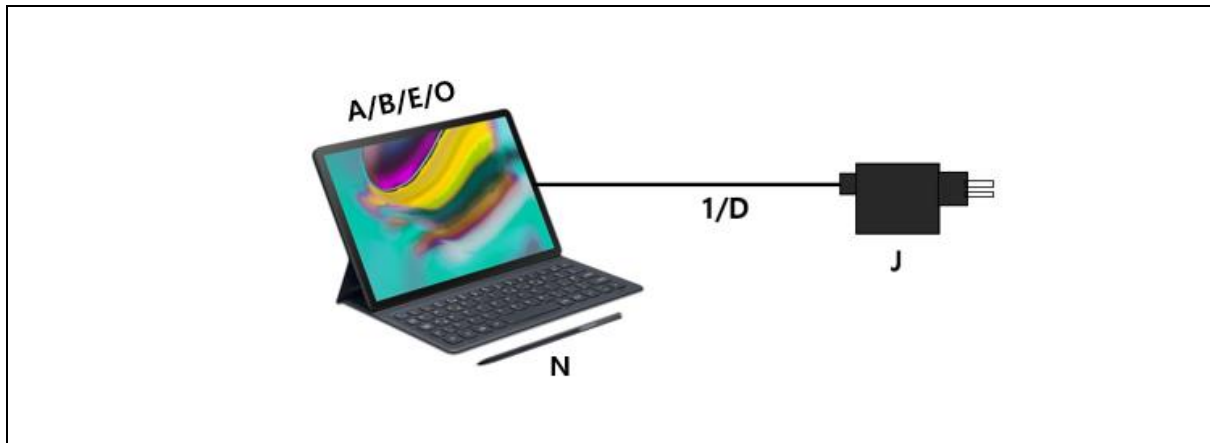


[Mode 1 - 3]

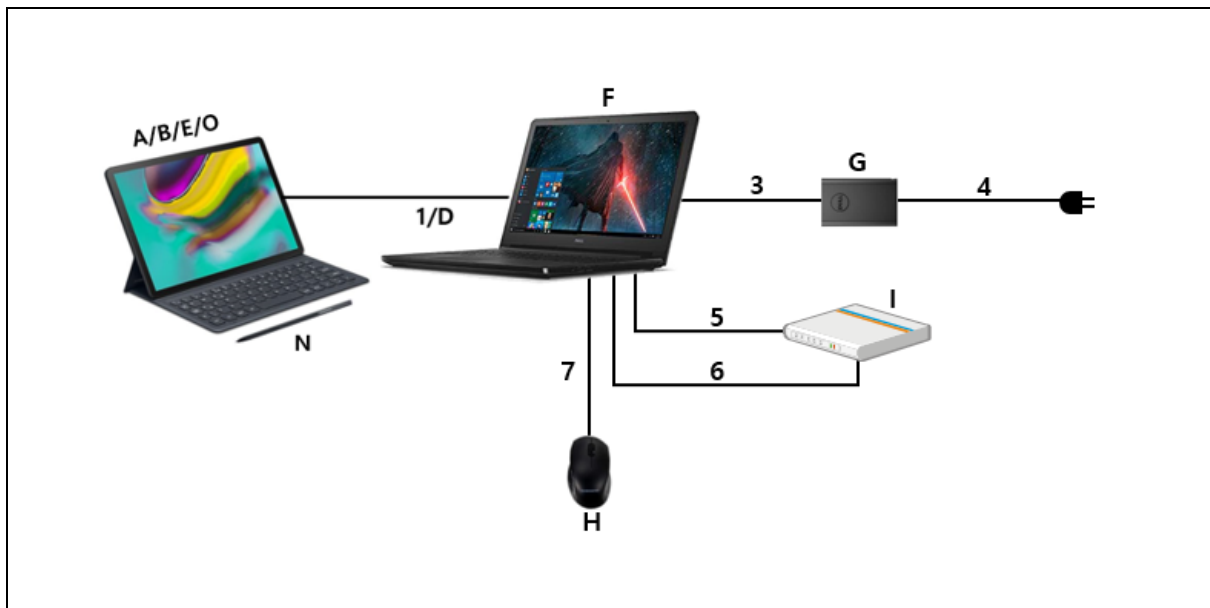


[Mode 4]


4.5.2 Radiated emission

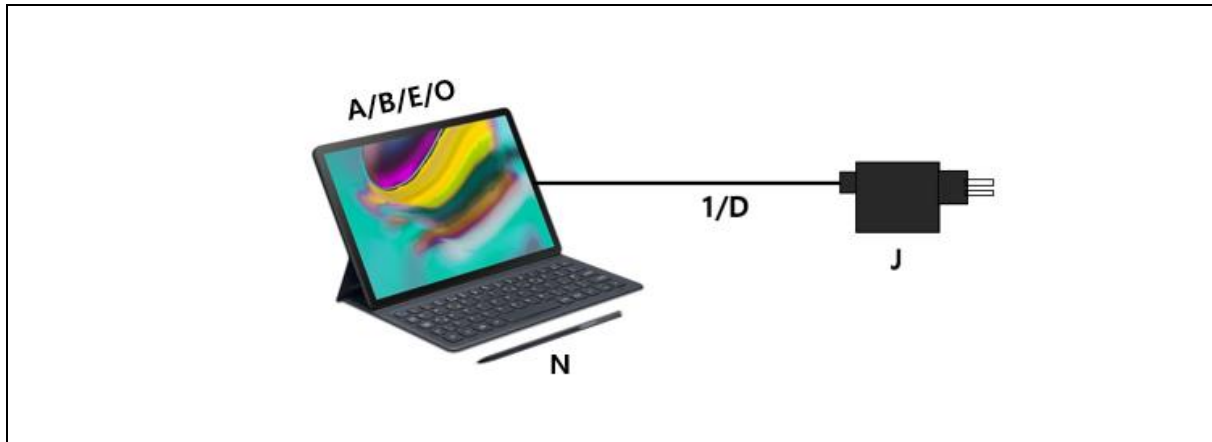


[Mode 1]

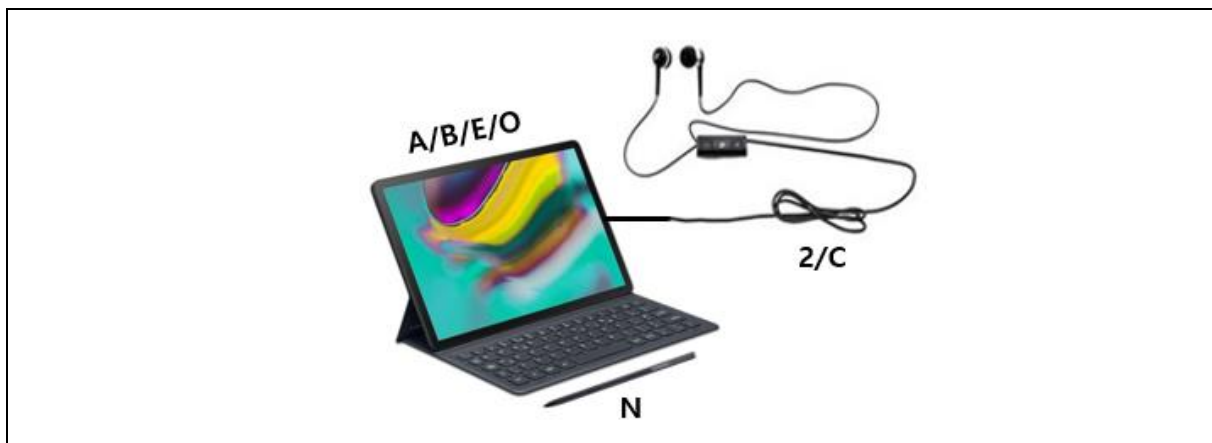

[Mode 2 - 3]

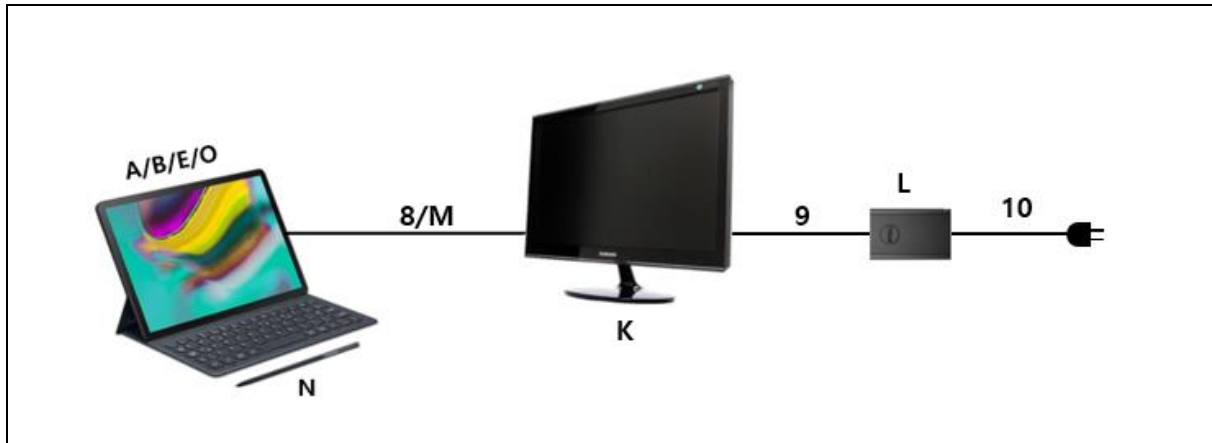

[Mode 4]

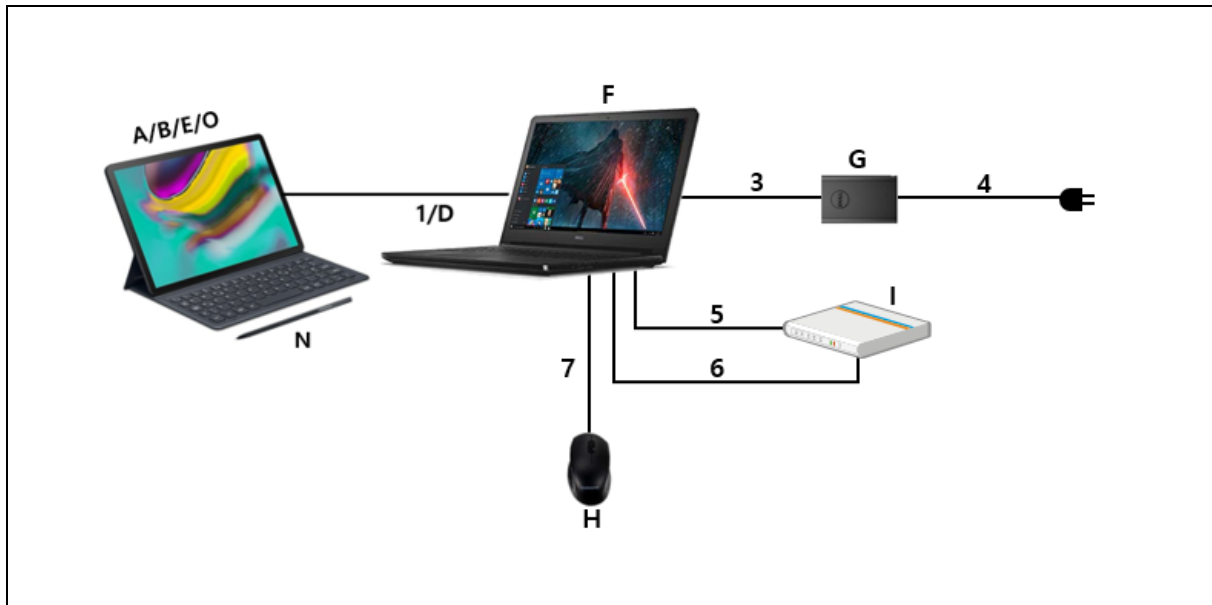

[Mode 5]

4.6 EUT Description

The EUT is a tablet type portable device which can operate on GSM 850/900/1800/1900, WCDMA FDD1/2/4/5/8, LTE FDD1/2/3/4/5/7/8/12/13/17/20/25/26/28/32/66, LTE TDD38/40/41, 5G NR n1/3/5/7/8/20/28/38/40/41/77/78 and incorporates a Bluetooth, Wi-Fi(802.11 a/b/g/n/ac), Camera, Audio, Video, GNSS, DP, Pogo Pin and S-pen.

4.6.1 The variant models

- None

4.7 EUT Frequencies

The highest frequencies (Generated and used)	Frequency [MHz]
Wi-Fi	5 825

4.8 Test configuration and condition

The system was configured for testing in a typical fashion that a customer would normally use.

Cables were attached to each of the available I/O Ports. Where applicable, peripherals were attached to the I/O cables. All the external I/O ports are exercised, as well as internal and the external SD card (if available), by writing and reading arbitrary data or charging with TA.

The EUT was investigated in three orientations and the worst case orientation is reported.

RX mode(850MHz) testing was performed with the LTE FDD26 RX Test mode at center frequency. All licensed communication (850MHz) RX mode, GSM/WCDMA/LTE, test results are not significantly different.

The video and audio were repetitively played with the headset connected.

The video and audio were played on monitor through display out function using direct DP cable.

The camera of the EUT was operated continuously.

The EUT was connected to the book cover keyboard using the pogo pin.

Power source for the EUT operating was supplied by CVCF made by the Pacific Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4-2 and UKAS M3003)

Test type		Measurement uncertainty (C.L. approximately 95 %, $k = 2$)
Conducted emission	AC Mains	2.83 dB
Radiated emission (Below 1 GHz)	Horizontal	3.97 dB
	Vertical	4.39 dB
Radiated emission (Above 1 GHz)	Horizontal	5.21 dB
	Vertical	5.21 dB

* Remark

- 1) The values for uncertainty of conducted and radiated emissions are less than the Corresponding values of U_{cispr} given in CISPR 16-4-2. Therefore no adjustment of measurement results is necessary when comparing them with the relevant limits.

5. Results of individual test

5.1 Conducted emission

The EUT is connected to a LISN via travel adapter. If the EUT is connected to the Laptop Computer USB port, the Laptop AC adapter is connected to a LISN.

Both conducted lines are measured in Quasi-Peak and CISPR-Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted emission at the mains ports of Class B

Frequency range Limits [MHz]	Resolution Bandwidth [kHz]	Limits [dB(μV)]	
		Quasi-peak	Average
0.15 to 0.50	9	66 to 56	56 to 46
0.50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Next Calibration	
					Date	Interval (Month)
E5I-007	LTE Communicator	CMW500	R&S	132729	2022-03-30	12
E5I-127	Two-Line V-Network	ENV216	R&S	102061	2021-07-29	12
E5I-015	EMI Test Receiver	ESU8	R&S	100481	2021-07-01	12
-	Test software	EMC32	R&S	Ver 9.26.01	-	-

5.1.2 Temperature and humidity condition

Test date	2021-04-02	Test engineer	Ji-Yeon Lee
Climate condition	Ambient temperature	(22.9 ± 0.5) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(40.6 ± 0.5) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.3 ± 0.5) kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

5.1.3 Test results

Operating Mode 1: AC Mains

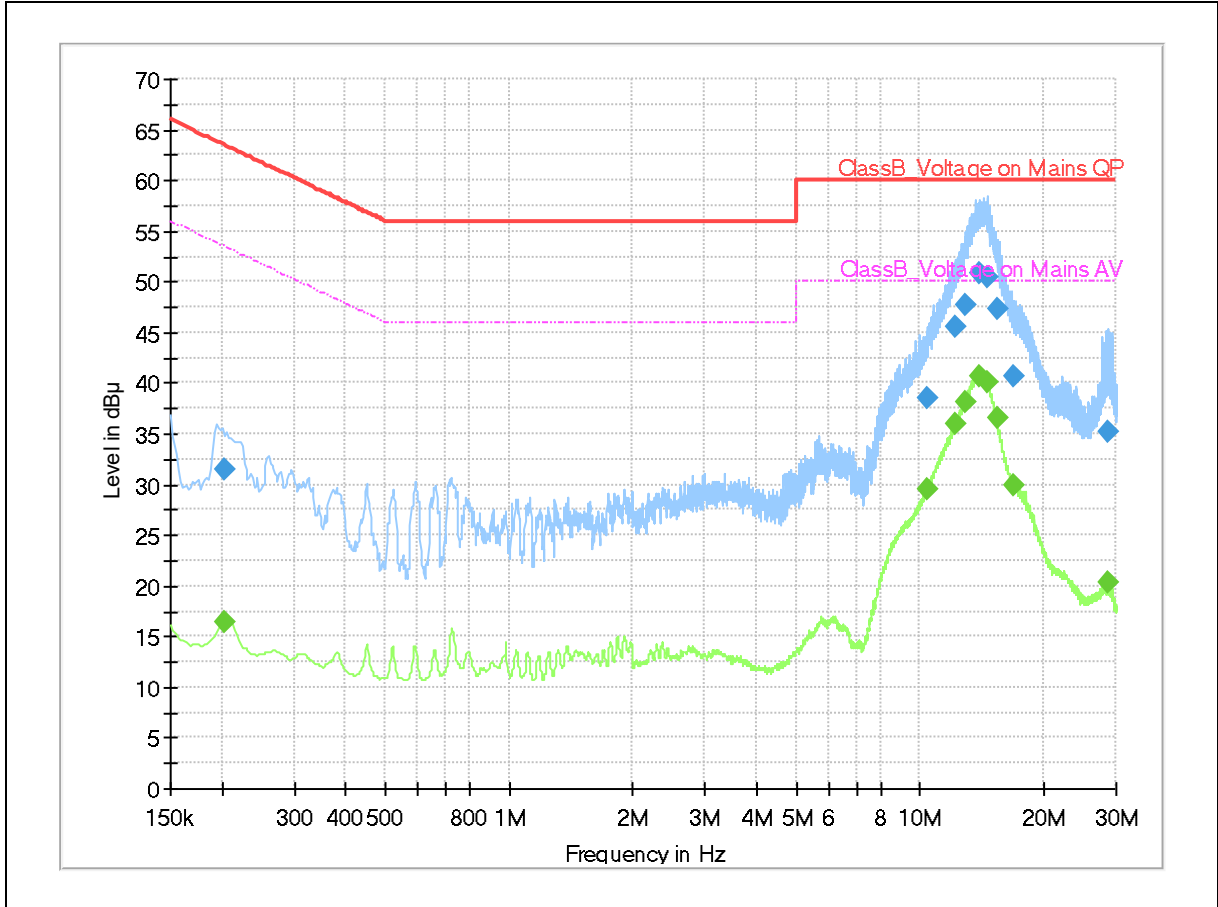

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.204	---	16.36	53.45	37.09	N	10.0
0.204	31.55	---	63.45	31.90	N	10.0
10.397	---	29.57	50.00	20.43	N	10.3
10.397	38.46	---	60.00	21.54	N	10.3
12.260	---	36.07	50.00	13.93	N	10.3
12.260	45.48	---	60.00	14.52	N	10.3
12.919	---	38.20	50.00	11.80	N	10.4
12.919	47.80	---	60.00	12.20	N	10.4
13.954	---	40.66	50.00	9.34	N	10.4
13.954	50.75	---	60.00	9.25	N	10.4
14.609	---	40.00	50.00	10.00	N	10.4
14.609	50.37	---	60.00	9.63	N	10.4
15.405	---	36.63	50.00	13.37	N	10.5
15.405	47.36	---	60.00	12.64	N	10.5
16.940	---	29.85	50.00	20.15	N	10.6
16.940	40.66	---	60.00	19.34	N	10.6
28.570	---	20.35	50.00	29.65	N	10.8
28.570	35.28	---	60.00	24.72	N	10.8


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 2: AC Mains

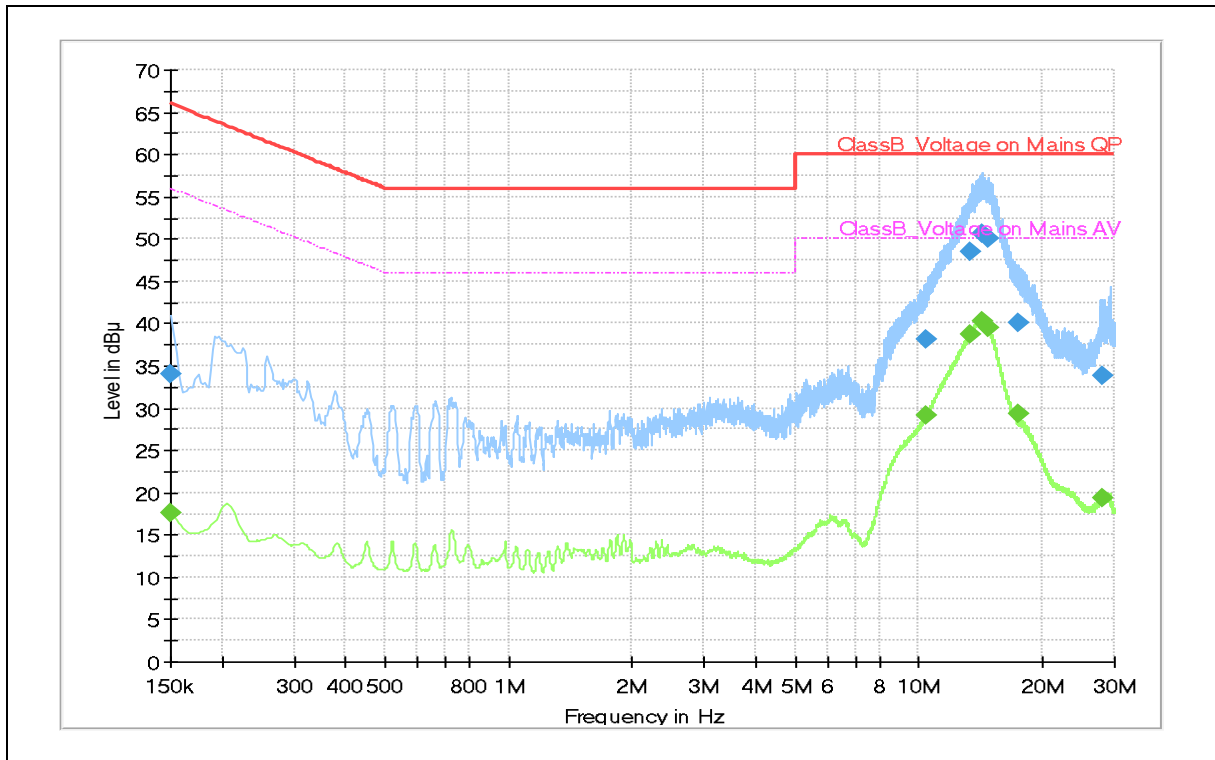

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150	---	17.61	56.00	38.39	L1	9.9
0.150	33.93	---	66.00	32.07	L1	9.9
10.374	---	29.18	50.00	20.82	N	10.3
10.374	38.06	---	60.00	21.94	N	10.3
13.304	---	38.72	50.00	11.28	N	10.4
13.304	48.52	---	60.00	11.48	N	10.4
14.314	---	40.32	50.00	9.68	N	10.4
14.314	50.62	---	60.00	9.38	N	10.4
14.820	---	39.51	50.00	10.49	N	10.5
14.820	50.04	---	60.00	9.96	N	10.5
17.543	---	29.26	50.00	20.74	N	10.6
17.543	40.13	---	60.00	19.87	N	10.6
27.949	---	19.45	50.00	30.55	N	10.8
27.949	33.77	---	60.00	26.23	N	10.8


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 3: AC Mains

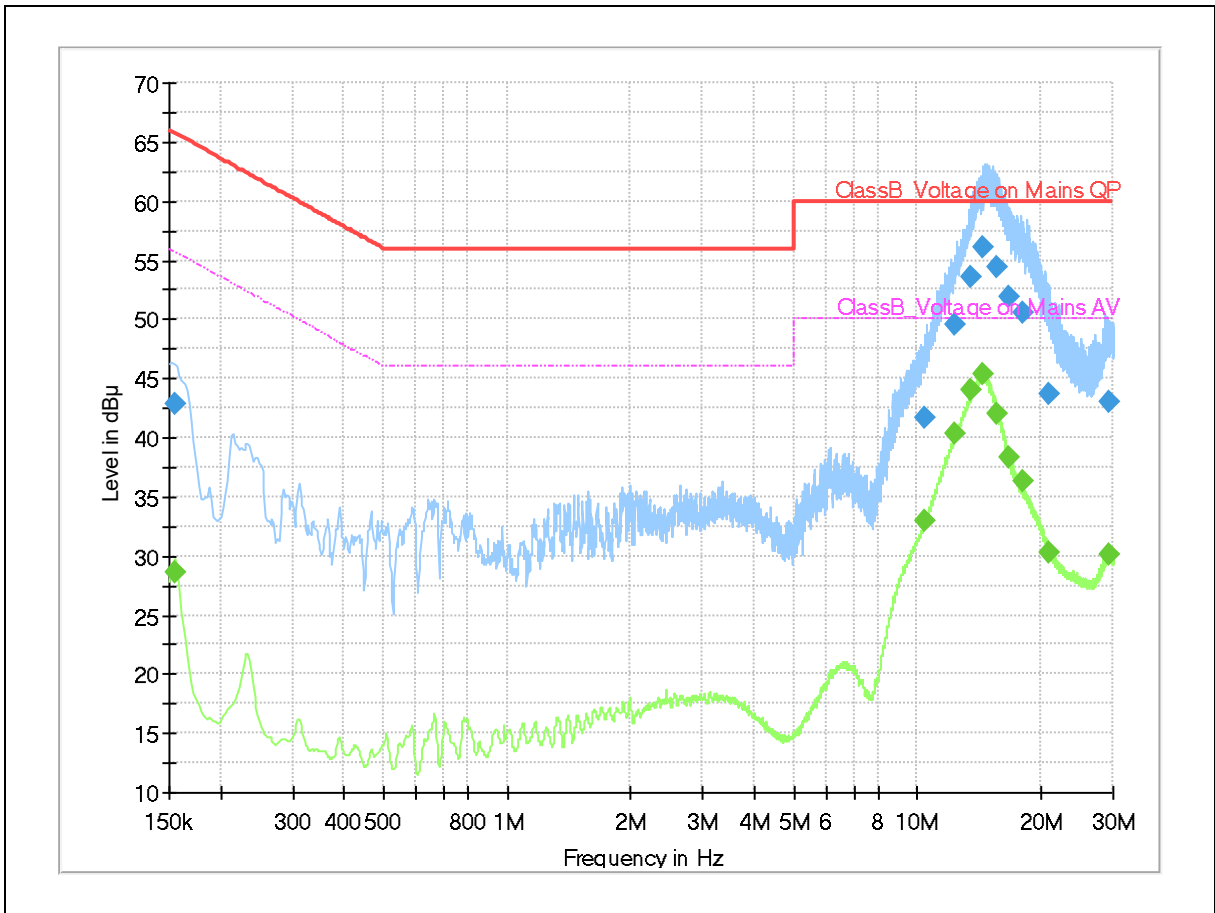

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.155	---	28.52	55.75	27.23	N	10.0
0.155	42.91	---	65.75	22.84	N	10.0
10.397	---	32.97	50.00	17.03	N	10.3
10.397	41.72	---	60.00	18.28	N	10.3
12.368	---	40.40	50.00	9.60	N	10.3
12.368	49.47	---	60.00	10.53	N	10.3
13.535	---	44.09	50.00	5.91	N	10.4
13.535	53.63	---	60.00	6.37	N	10.4
14.485	---	45.43	50.00	4.57	N	10.4
14.485	56.12	---	60.00	3.88	N	10.4
15.673	---	42.08	50.00	7.92	N	10.5
15.673	54.48	---	60.00	5.52	N	10.5
16.656	---	38.40	50.00	11.60	N	10.5
16.656	51.97	---	60.00	8.03	N	10.5
18.038	---	36.29	50.00	13.71	N	10.6
18.038	50.53	---	60.00	9.47	N	10.6
21.041	---	30.30	50.00	19.70	N	10.7
21.041	43.61	---	60.00	16.39	N	10.7
29.213	---	30.06	50.00	19.94	N	10.8
29.213	43.07	---	60.00	16.93	N	10.8


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 4: AC Mains

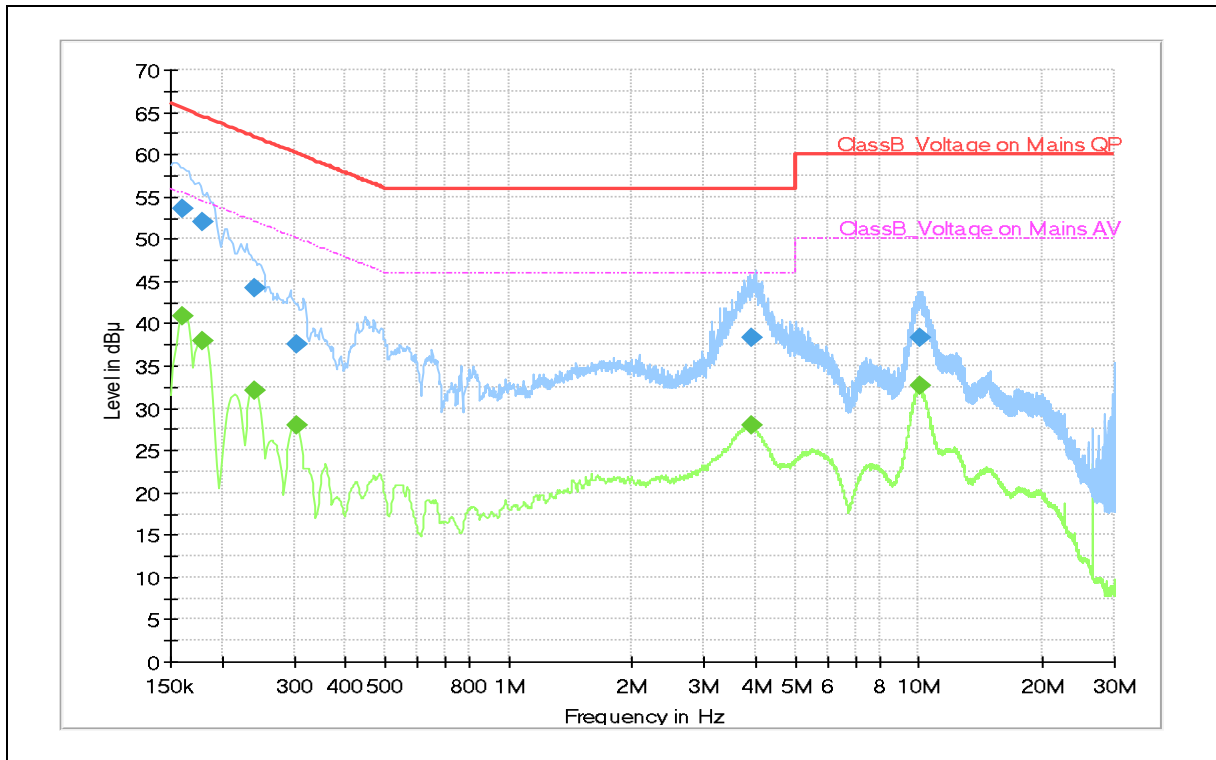

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.161	---	40.82	55.40	14.58	N	10.1
0.161	53.58	---	65.40	11.82	N	10.1
0.179	51.98	---	64.52	12.55	L1	10.1
0.179	---	37.95	54.52	16.57	L1	10.1
0.240	44.15	---	62.10	17.95	L1	9.8
0.240	---	32.07	52.10	20.03	L1	9.8
0.303	37.57	---	60.16	22.59	L1	9.9
0.303	---	27.95	50.16	22.21	L1	9.9
3.910	---	27.96	46.00	18.04	L1	9.8
3.910	38.38	---	56.00	17.62	L1	9.8
10.021	---	32.61	50.00	17.39	L1	9.8
10.021	38.24	---	60.00	21.76	L1	9.8

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

5.2 Radiated emission

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/CISPR-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency generated or used in the device or on which the device operates or tunes at a measurement distance of 3 m for the following antenna and turntable arrangements. The measurements above 1 GHz were performed with the bore-sighting antenna aimed at the EUT.

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and CISPR-average detectors.

Limits for radiated emission of Class B at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Note) Distance correction formula from $D_1(3\text{m})$ to $D_2(10\text{m})$
: Limit at $D_2 = \text{Limit at } D_1 + 20\text{Log}(D_1 / D_2)$

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Next Calibration	
					Date	Interval (Month)
E5I-021	EMI Test Receiver	ESU40	R&S	100376	2022-02-04	12
E5I-016	EMI Test Receiver	ESU8	R&S	100482	2021-06-04	12
E5I-072	BiLog Antenna	CBL6112D	TESEQ	36009	2022-05-15	24
E5I-223	6 dB Fixed Attenuator	8491B-006	Agilent	58359	2022-05-15	24
E5I-120	BiLog Antenna	CBL6112D	TESEQ	36997	2022-05-15	24
E5I-189	6 dB Fixed Attenuator	8491A	Keysight	MY52462295	2022-05-15	24
E5I-073	Preamplifier	310N	SONOMA	332016	2021-05-07	12
E5I-074	Preamplifier	310N	SONOMA	332017	2021-05-07	12
E5I-035	Horn Antenna	HF907	R&S	100506	2021-08-30	24
E5I-040	Signal Conditioning Unit	SCU-18	R&S	10210	2021-04-06	12
E5I-037	WideBand Horn Antenna	WBH 18-40K	R&S	11201	2023-02-15	24
E5I-042	Signal Conditioning Unit	SCU-40A	R&S	10004	2021-09-09	12
-	Test software	EP7RE	TOYO	Ver 5.8.2	-	-
-	Test software	EMC32	R&S	Ver 9.25.00	-	-


5.2.2 Temperature and humidity condition

Test date	2021-03-29 ~ 2021-03-30	Test engineer	Ji-Yeon Lee
Climate condition	Ambient temperature	(23.9 ± 0.5) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(44.5 ± 0.5) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.6 ± 0.5) kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC5)		

5.2.3 Test results

Operating Mode 1

- Frequencies below 1 GHz

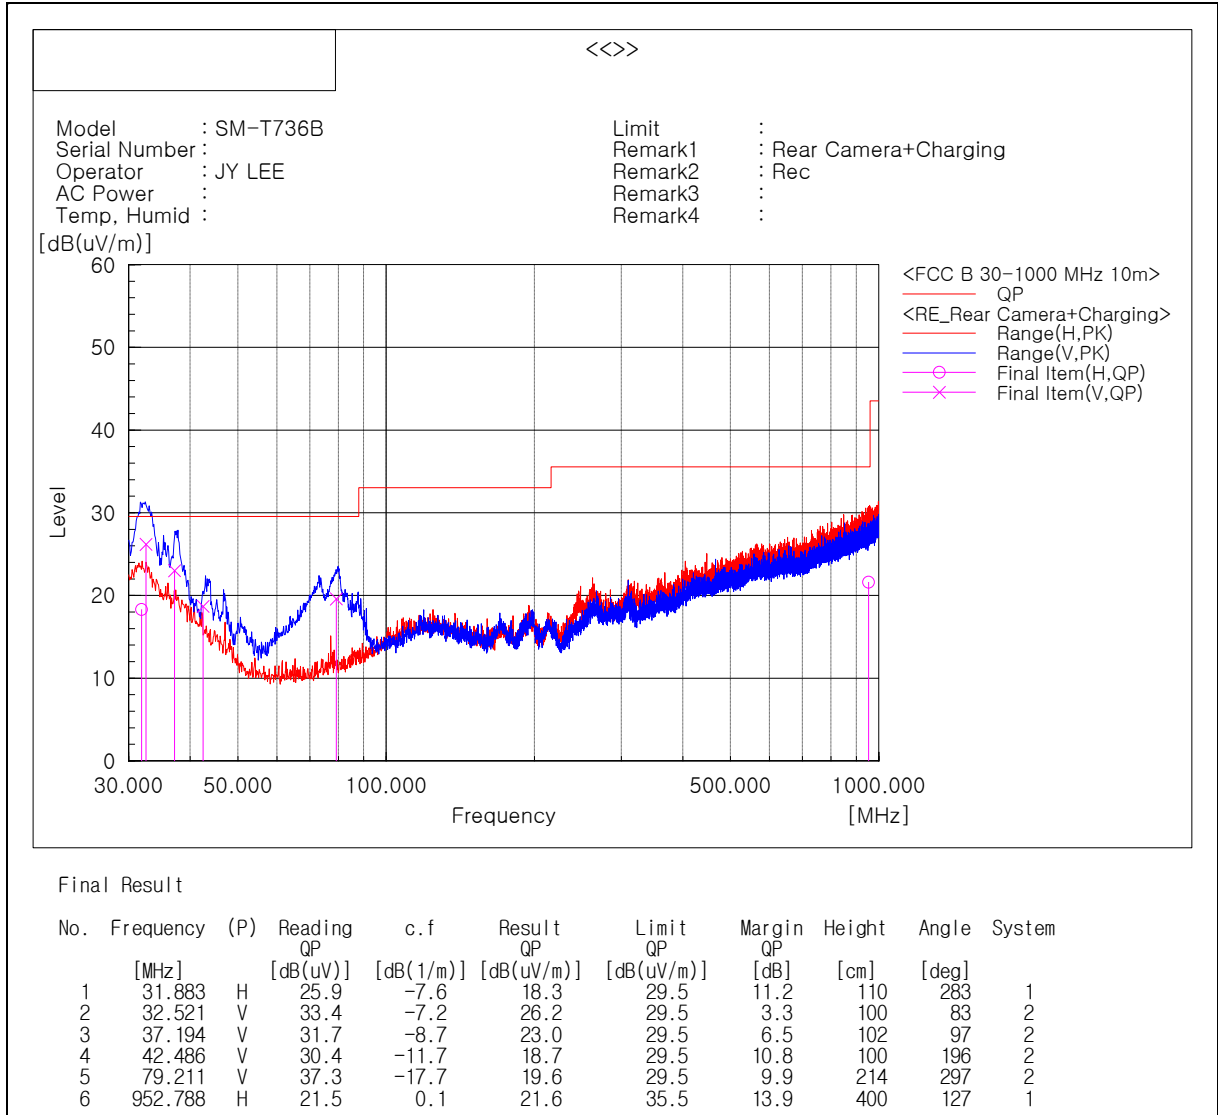

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

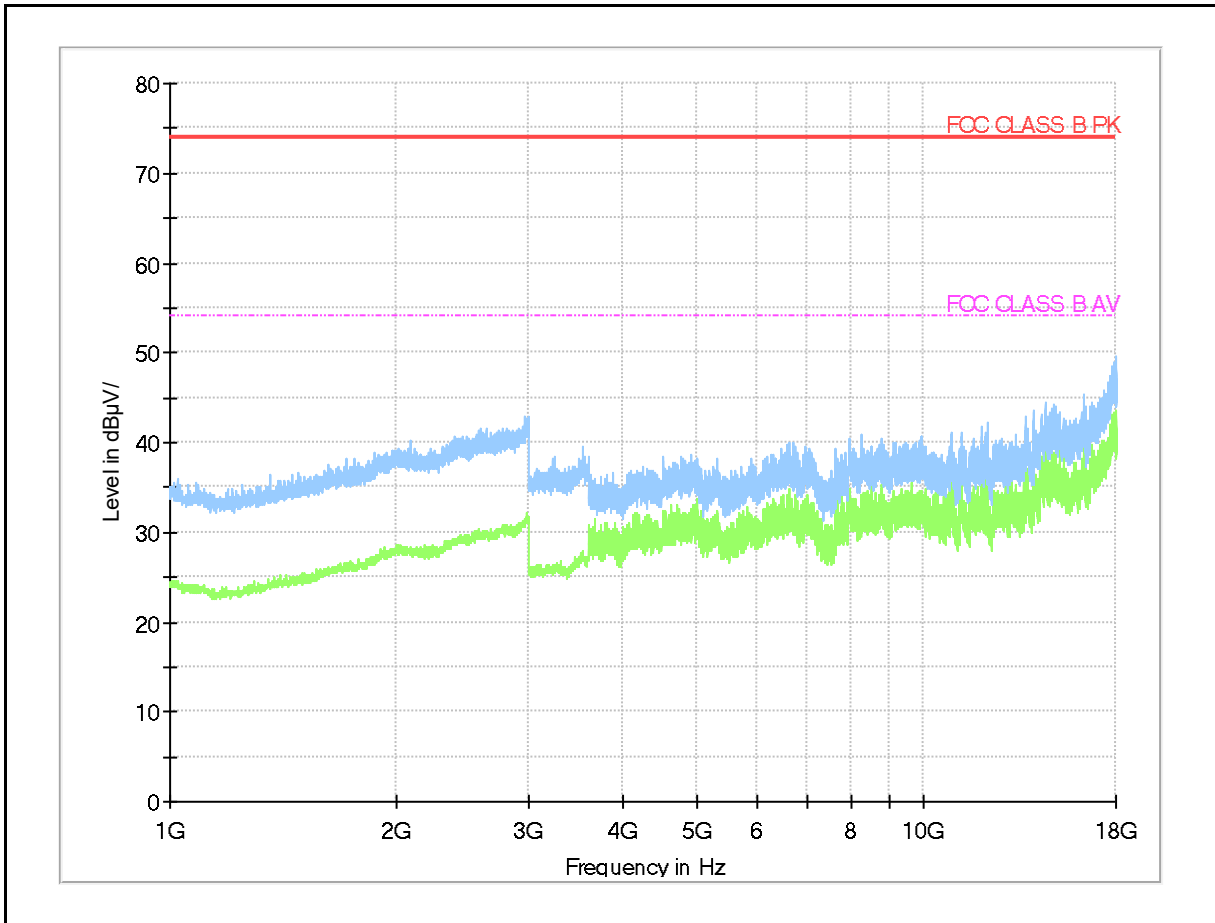

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 2

- Frequencies below 1 GHz

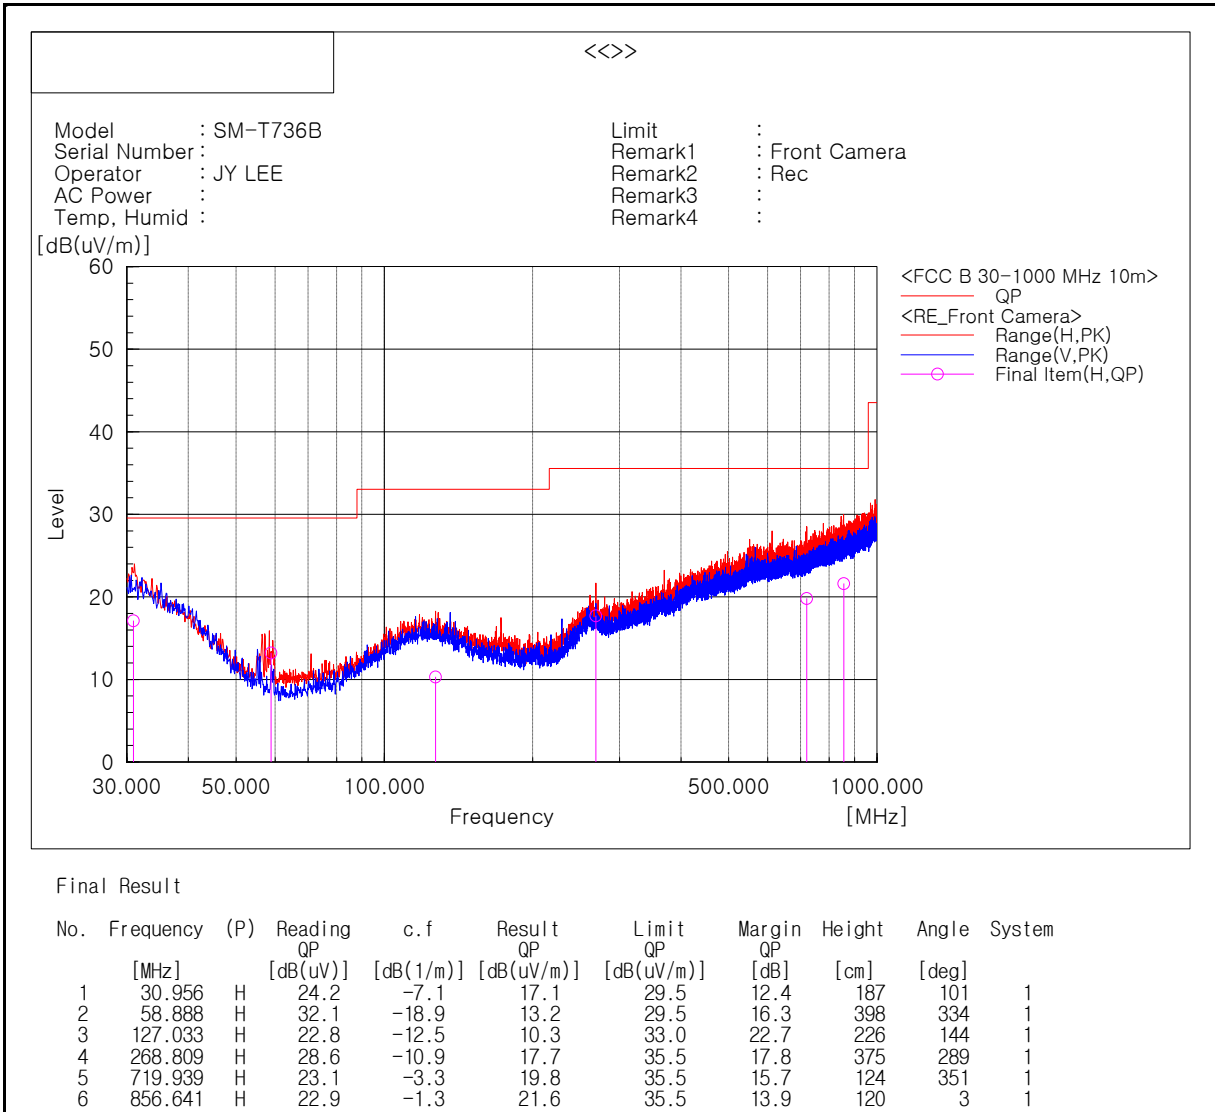


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

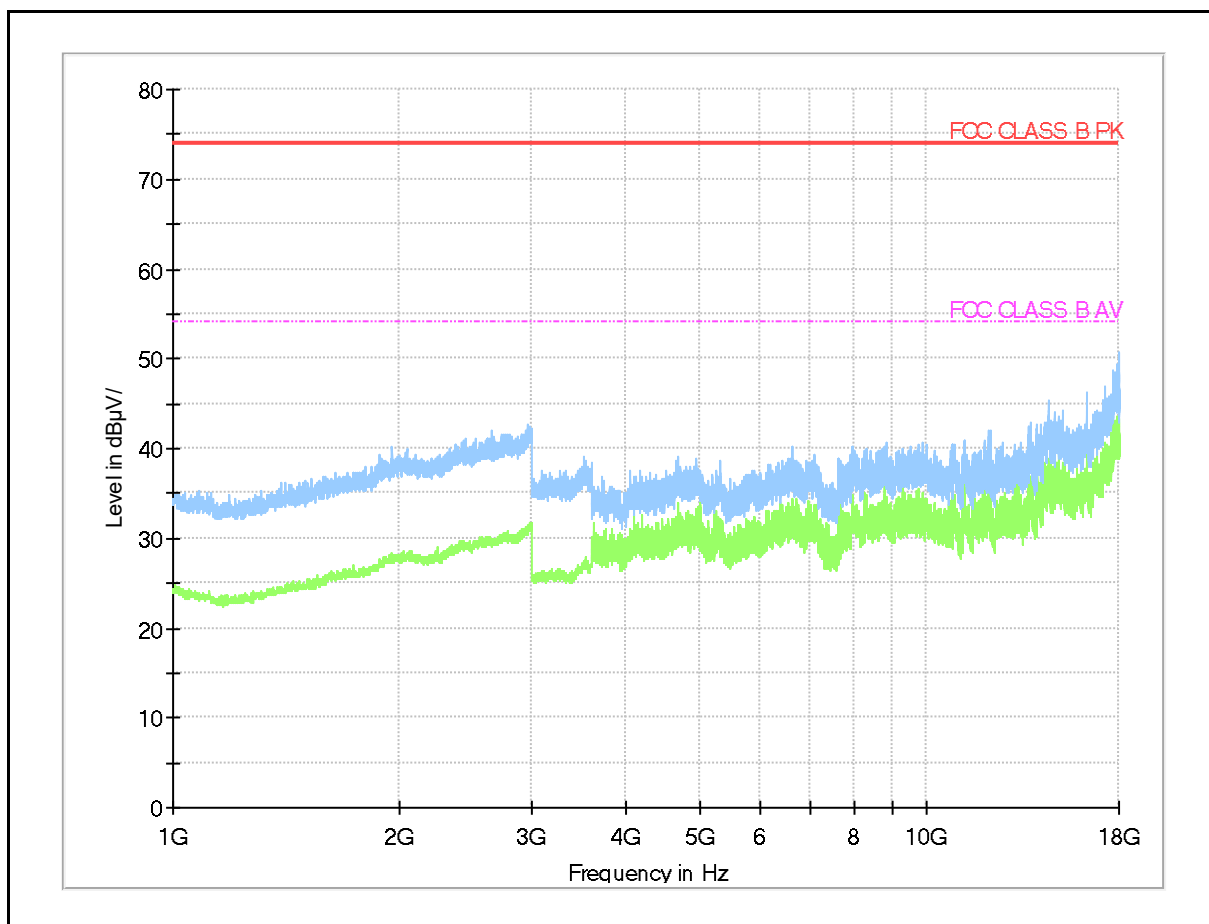- Frequencies above 1 GHz

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 3

- Frequencies below 1 GHz

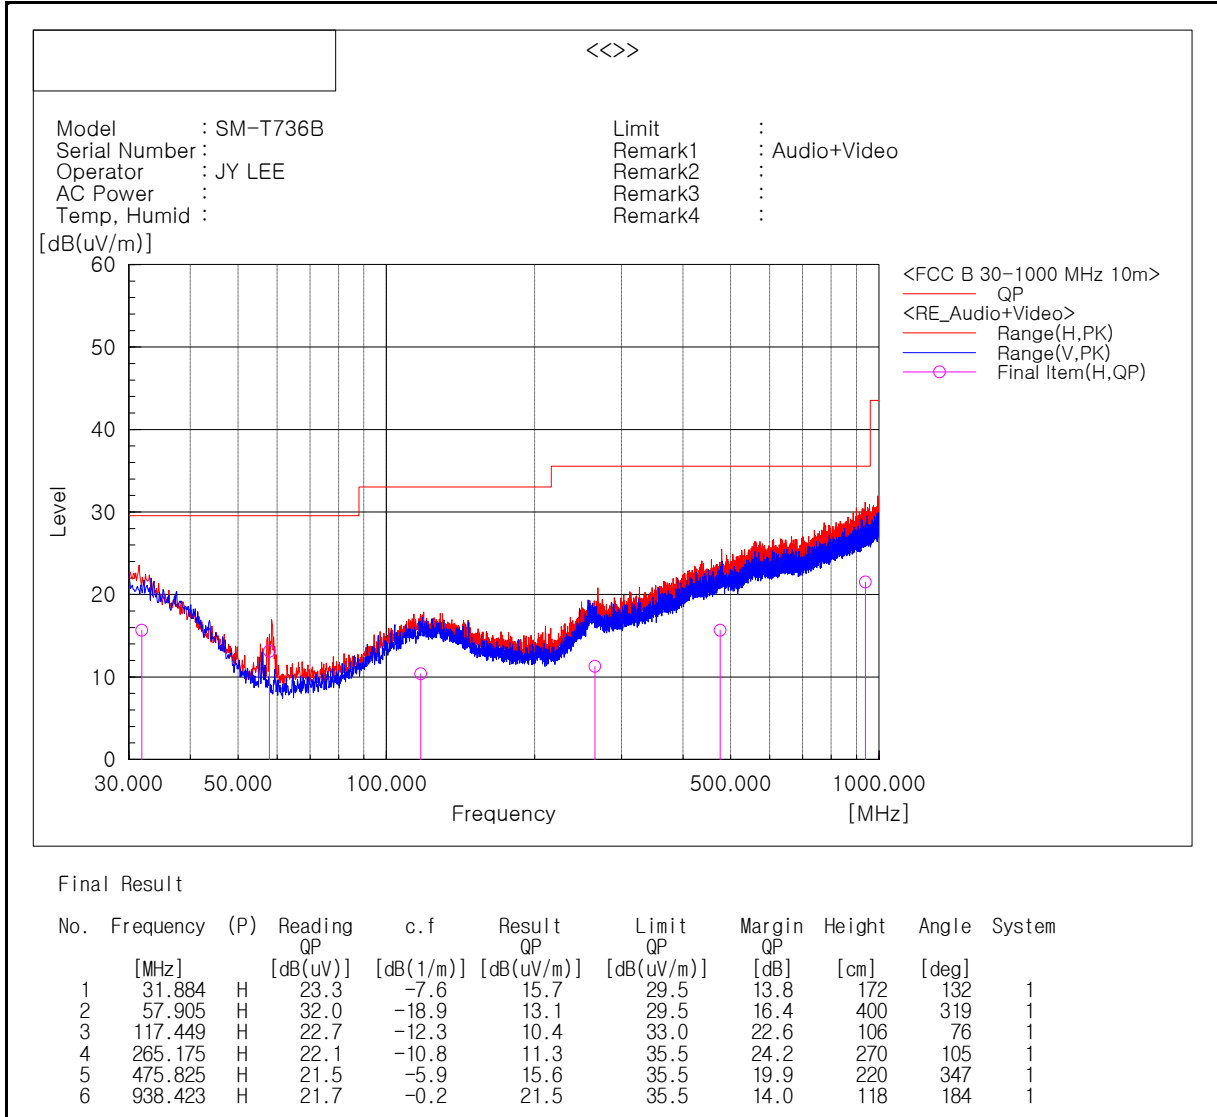


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

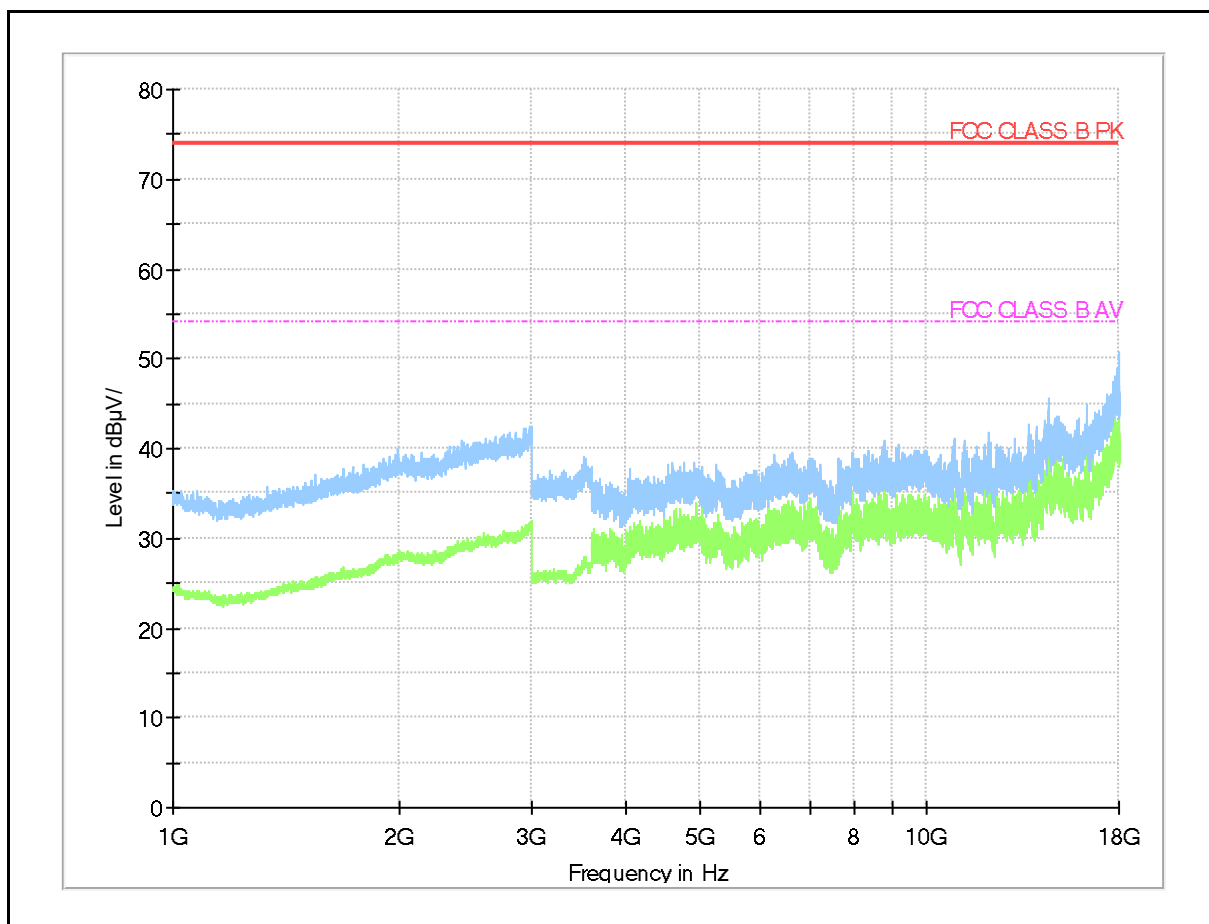- Frequencies above 1 GHz

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 4

- Frequencies below 1 GHz

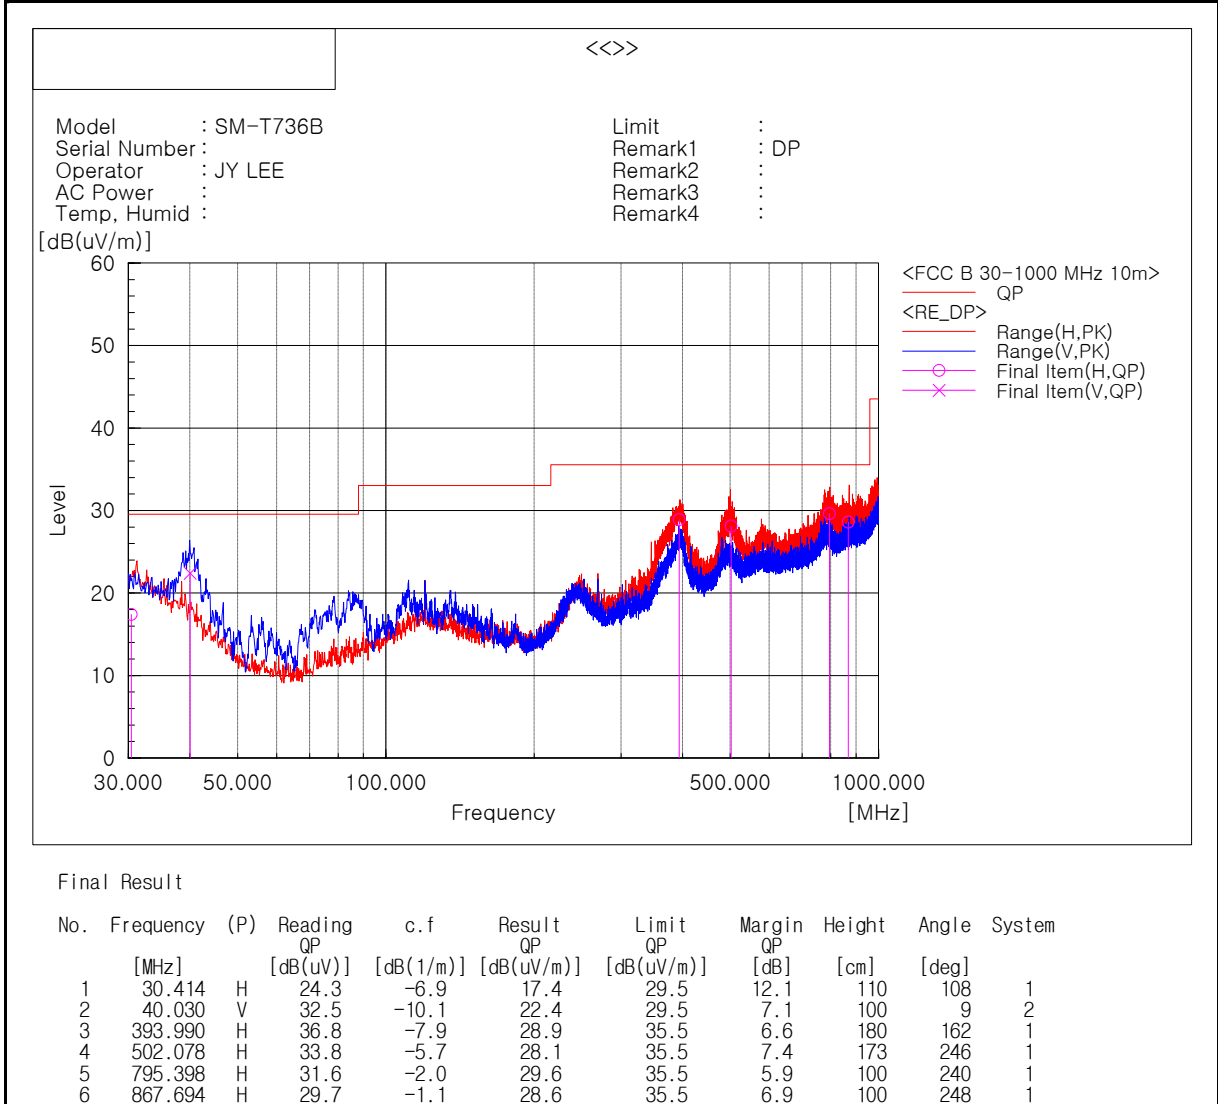

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

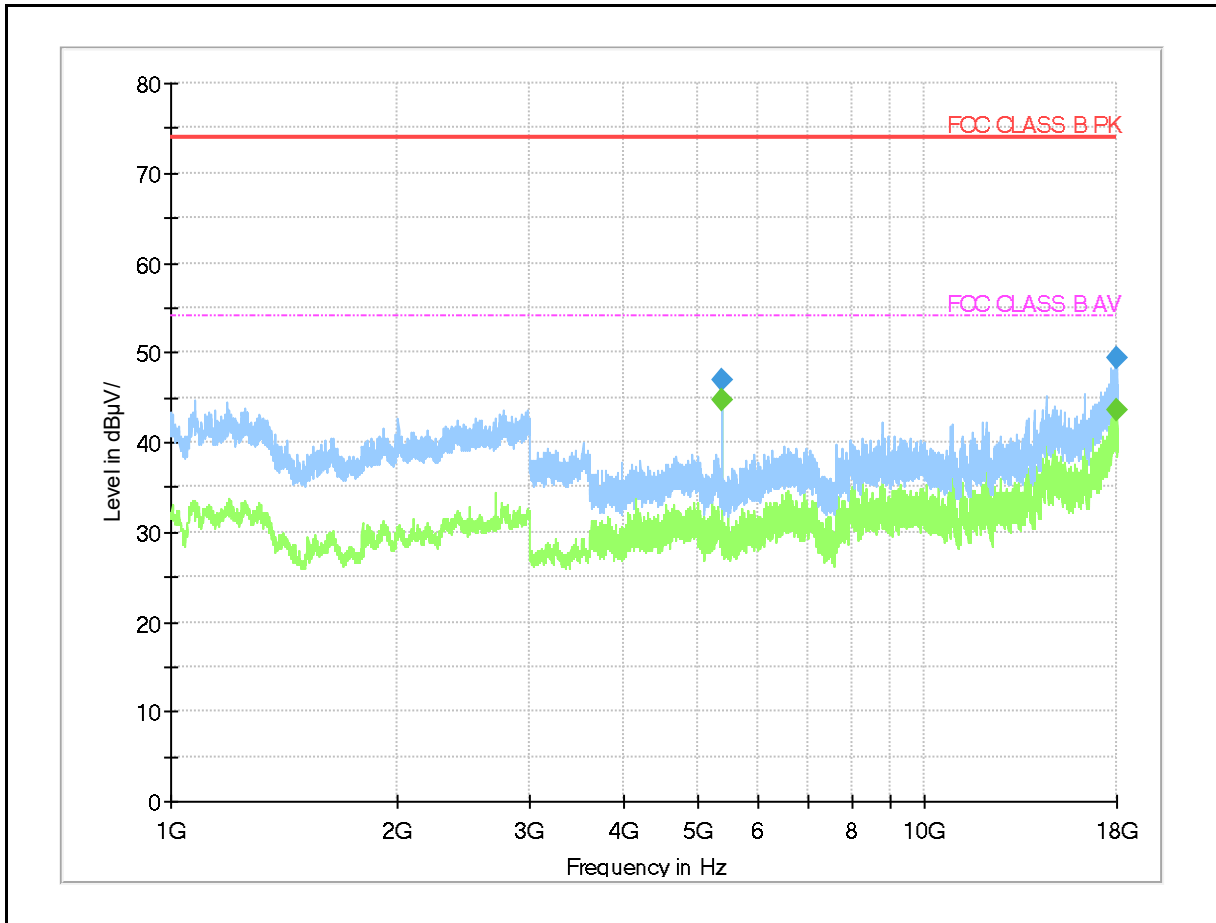

Frequency (MHz)	PK (dBµV/)	CAV (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
5 400.000	---	44.80	54.00	9.20	106.4	H	123.0	6.0
5 400.000	47.01	---	74.00	26.99	104.2	H	123.0	6.0
17 996.000	49.32	---	74.00	24.68	109.0	V	137.0	37.8
17 997.000	---	43.67	54.00	10.33	110.2	V	97.0	37.8

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 5

- Frequencies below 1 GHz

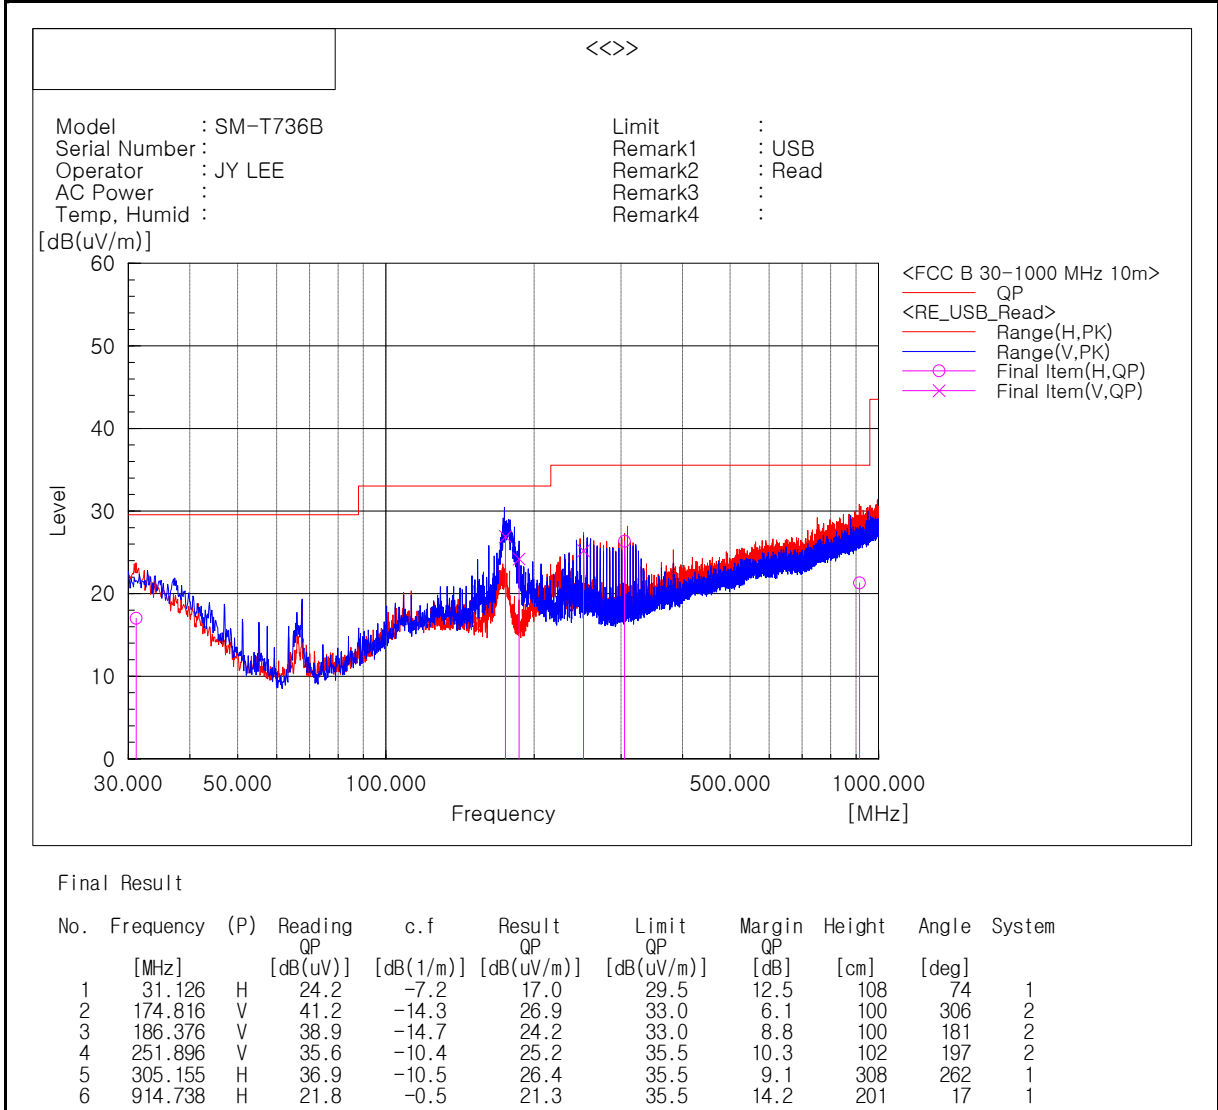

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

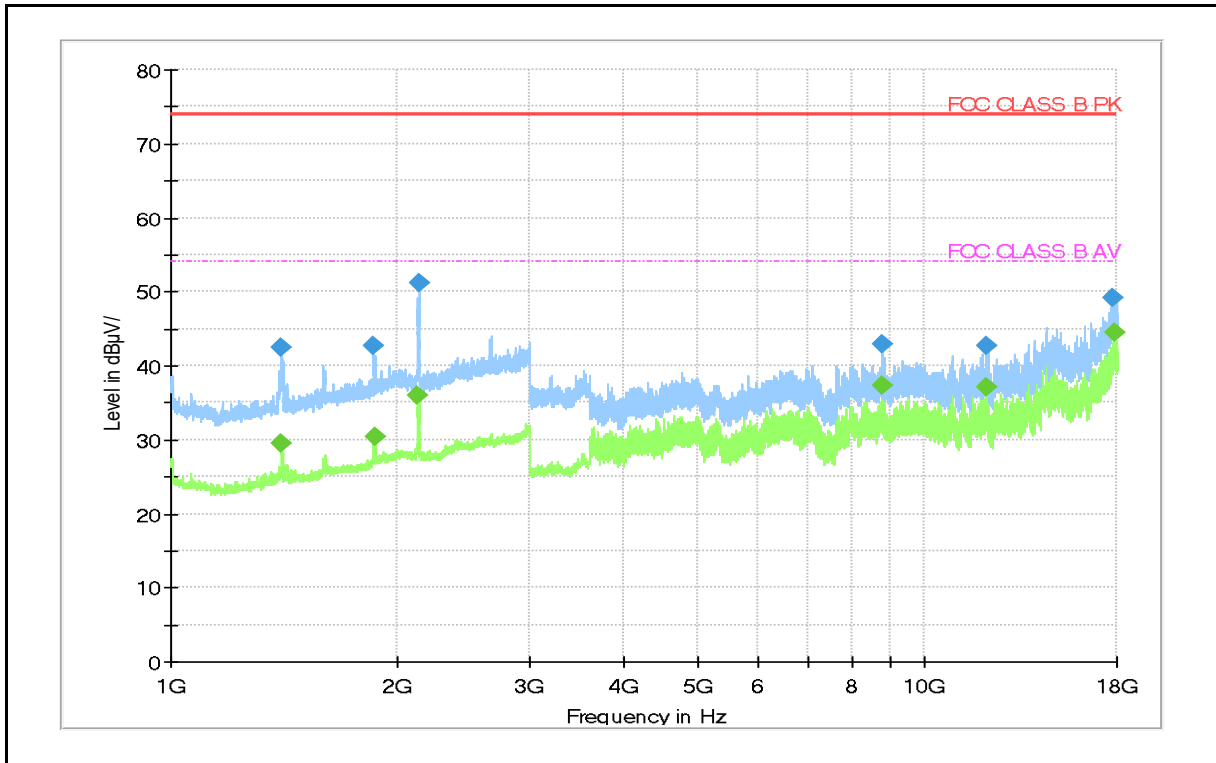

Frequency (MHz)	PK (dBµV/)	CAV (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 400.500	42.49	---	74.00	31.51	102.3	V	351.0	7.6
1 404.500	---	29.53	54.00	24.47	104.1	V	351.0	7.6
1 859.000	42.66	---	74.00	31.34	105.6	H	135.0	10.5
1 863.500	---	30.35	54.00	23.65	107.1	V	0.0	10.6
2 128.500	---	35.94	54.00	18.06	101.0	V	21.0	11.6
2 133.000	51.10	---	74.00	22.90	100.7	V	24.0	11.6
8 797.500	---	37.43	54.00	16.57	109.2	V	82.0	15.9
8 797.500	43.01	---	74.00	30.99	108.4	V	82.0	15.9
12 053.500	42.66	---	74.00	31.34	101.2	V	17.0	21.5
12 056.500	---	37.08	54.00	16.92	100.8	V	297.0	21.5
17 769.000	49.06	---	74.00	24.94	104.0	V	42.0	38.2
17 885.000	---	44.44	54.00	9.56	104.9	V	90.0	38.5

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor