

MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Rep. of Korea

Date of Testing:
7/7 - 7/29/2015
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1507071385.A3L

FCC ID:	A3LSMT817P
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model(s): SM-T817P
EUT Type: Portable Tablet
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
Test Procedure(s): KDB 789033 D02 v01, KDB 644545 v01r02, KDB 662911 D01 v02r01

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	20.701	13.16	22.233	13.47	N/A	
	2A	20	5260 - 5320	20.941	13.21	21.330	13.29		
	2C	20	5500 - 5720	21.478	13.32	20.230	13.06		
	3	20	5745 - 5825	19.953	13.00	20.324	13.08		
802.11n	1	20	5180 - 5240	19.275	12.85	21.979	13.42	41.254	16.15
	2A	20	5260 - 5320	20.417	13.10	21.827	13.39	41.797	16.21
	2C	20	5500 - 5720	20.701	13.16	20.845	13.19	41.308	16.16
	3	20	5745 - 5825	19.454	12.89	20.277	13.07	39.730	15.99
802.11ac	1	20	5180 - 5240	20.559	13.13	22.131	13.45	41.791	16.21
	2A	20	5260 - 5320	22.233	13.47	21.928	13.41	43.466	16.38
	2C	20	5500 - 5720	19.543	12.91	21.232	13.27	40.776	16.10
	3	20	5745 - 5825	21.184	13.26	19.907	12.99	41.090	16.14
802.11n	1	40	5190 - 5230	13.552	11.32	15.066	11.78	28.618	14.57
	2A	40	5270 - 5310	15.740	11.97	14.655	11.66	30.194	14.80
	2C	40	5510 - 5710	17.100	12.33	17.701	12.48	34.521	15.38
	3	40	5755 - 5795	16.982	12.30	17.539	12.44	34.404	15.37
802.11ac	1	40	5190 - 5230	14.997	11.76	14.588	11.64	29.187	14.65
	2A	40	5270 - 5310	16.406	12.15	14.028	11.47	30.305	14.82
	2C	40	5510 - 5710	17.660	12.47	17.022	12.31	34.245	15.35
	3	40	5755 - 5795	17.378	12.40	16.982	12.30	34.360	15.36
802.11ac	1	80	5210	13.122	11.18	13.152	11.19	26.274	14.20
	2A	80	5290	12.942	11.12	12.794	11.07	25.736	14.11
	2C	80	5530 - 5690	13.646	11.35	12.359	10.92	26.005	14.15
	3	80	5775	12.853	11.09	11.803	10.72	24.656	13.92

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01 and KDB 644545 v01r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortañez
President



FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 1 of 208	

TABLE OF CONTENTS


FCC PART 15.407 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 PCTEST TEST LOCATION		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES		5
2.3 TEST CONFIGURATION		6
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		6
3.0 DESCRIPTION OF TEST		7
3.1 EVALUATION PROCEDURE		7
3.2 AC LINE CONDUCTED EMISSIONS		7
3.3 RADIATED EMISSIONS		8
3.4 ENVIRONMENTAL CONDITIONS		8
4.0 ANTENNA REQUIREMENTS		9
5.0 TEST EQUIPMENT CALIBRATION DATA		10
6.0 TEST RESULTS		11
6.1 SUMMARY		11
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC		12
6.3 6DB BANDWIDTH MEASUREMENT – 802.11A/N/AC		45
6.4 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC		56
6.5 MAXIMUM POWER SPECTRAL DENSITY – 802.11A/N/AC		61
6.6 FREQUENCY STABILITY		105
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS – ABOVE 1GHZ		109
6.7.1 ANTENNA-1 RADIATED SPURIOUS EMISSION MEASUREMENTS		112
6.7.2 ANTENNA-2 RADIATED SPURIOUS EMISSION MEASUREMENTS		122
6.7.3 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)		133
6.7.4 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)		140
6.7.5 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)		147
6.7.6 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)		154
6.7.7 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)		161
6.7.8 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)		168
6.7.9 MIMO RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)		175
6.7.10 MIMO RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)		182
6.7.11 MIMO RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)		189
6.8 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ		196
6.9 LINE-CONDUCTED TEST DATA		200
7.0 CONCLUSION		208

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 2 of 208	



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro,
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: SM-T817P

FCC ID: A3LSMT817P

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)


Test Device Serial No.: BT/Wifi rigid, Max Pwr #1 Production Pre-Production Engineering

DATE(S) OF TEST: 7/7 - 7/29/2015



TEST REPORT S/N: 0Y1507071385.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 3 of 208	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

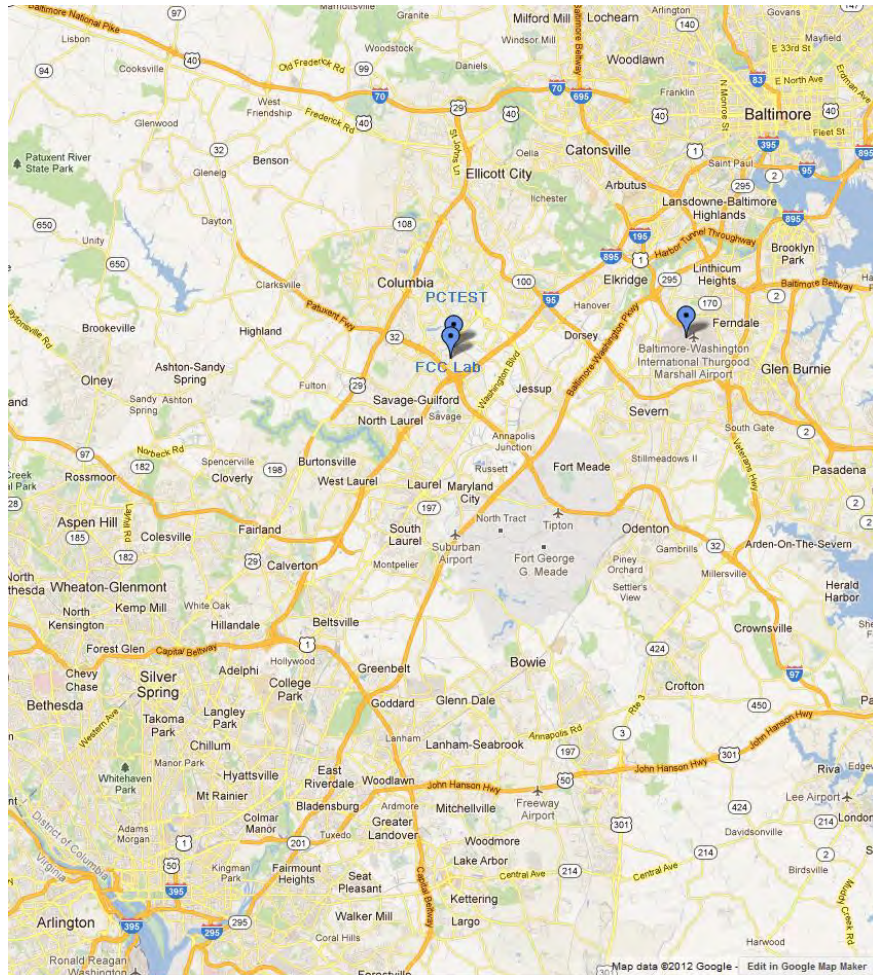




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNI MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 4 of 208	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMT817P**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), ANT+

Note: 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
5GHz	a	99.3	99.3	N/A
	n (HT20)	98.9	99.0	98.6
	ac (HT20)	98.6	99.0	98.4
	n (HT40)	98.7	98.5	98.0
	ac (HT40)	98.9	99.7	98.3
	ac (HT80)	98.5	98.1	90.3

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM	
		ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗
	11n (20MHz)	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓



Table 2-1. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,
 351/390, 390/433.3 (ac – 80MHz BW)



FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 5 of 208	

2.3 Test Configuration

The Samsung Portable Tablet FCC ID: A3LSMT817P was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.3, 6.4, and 6.5 for antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNI MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 6 of 208	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **Samsung Portable Tablet FCC ID: A3LSMT817P**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 9.15.0.

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 7 of 208	

3.3 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 8 of 208	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Tablet are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Samsung Portable Tablet FCC ID: A3LSMT817P** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825



Table 4-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	159	5795
				:	:		
				142	5710		

Table 4-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 9 of 208

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	10/24/2014	Annual	10/24/2015	N/A
-	WL40-1	Conducted Cable Set (40GHz)	10/14/2014	Annual	10/14/2015	N/A
-	RE3	Radiated Emissions Cable Set	10/17/2014	Annual	10/17/2015	N/A
Agilent	8447D	Broadband Amplifier	6/12/2015	Annual	6/12/2016	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9038A	MXE EMI Receiver	3/24/2015	Annual	3/24/2016	MY51210133
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Biennial	4/8/2016	1027293
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	1039008
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/17/2015	Annual	3/17/2016	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	130993
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	11/11/2014	Biennial	11/11/2016	114451
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	10/15/2014	Annual	10/15/2015	251425001
K & L	11SH10-6000/T18000	High Pass Filter	12/1/2014	Annual	12/1/2015	1
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	10/17/2014	Annual	10/17/2015	N/A
Rhode & Schwarz	TS-PR18	Pre-Amplifier	3/5/2015	Annual	3/5/2016	101622
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2015	Annual	3/5/2016	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/3/2015	Annual	3/3/2016	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/12/2015	Annual	3/12/2016	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	3/3/2015	Annual	3/3/2016	100037
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/17/2015	Annual	7/17/2016	100348
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

Table 5-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration due date or calibration date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 10 of 208	

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMT817P
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 6.3
15.407 (a.1)	Maximum Conducted Output Power	< 250mW (23.98dBm) (5150-5250MHz) < 250mW (23.98dBm) (5250-5350MHz) < 250mW (23.98dBm) (5470-5725MHz) < 1W (30dBm) (5725-5850MHz)		PASS	Section 6.4
15.407 (a.1), (5)	Maximum Power Spectral Density	< 11 dBm/MHz (5150-5250MHz, 5250-5350MHz, 5470-5725MHz) < 30 dBm/500kHz (5725-5850MHz)		PASS	Section 6.5
15.407(g)	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (outside 5150-5350MHz, 5470-5725MHz, 5715-5860MHz) < -17 dBm/MHz EIRP (within 5715-5725MHz and 5850-5860MHz)		RADIATED	PASS
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	PASS		Section 6.7, 6.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.9

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.2.

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 11 of 208	

6.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

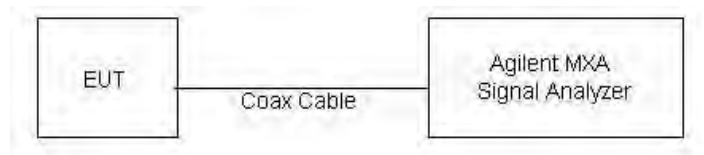




Figure 6-1. Test Instrument & Measurement Setup

Test Notes



None.


FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 12 of 208	

Antenna-1 26 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.45
	5200	40	a	6	21.55
	5240	48	a	6	21.41
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.70
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.65
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.66
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.80
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.90
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.76
Band 2A	5260	52	a	6	21.45
	5280	56	a	6	21.47
	5320	64	a	6	21.44
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.78
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.77
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.77
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.83
	5310	62	n (40MHz)	13.5/15 (MCS0)	40.04
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.25
Band 2C	5500	100	a	6	21.34
	5580	116	a	6	21.40
	5720	144	a	6	21.48
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.64
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.59
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.65
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.76
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.98
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.84
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.43
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.55

Table 6-2. Conducted Bandwidth Measurements

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 13 of 208	

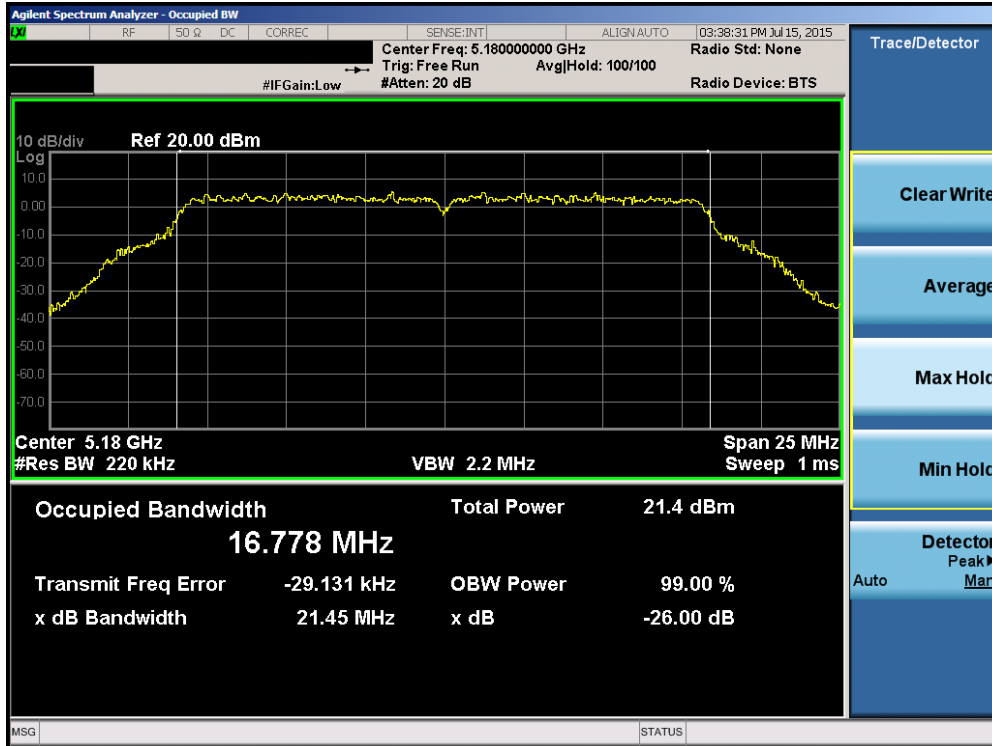


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

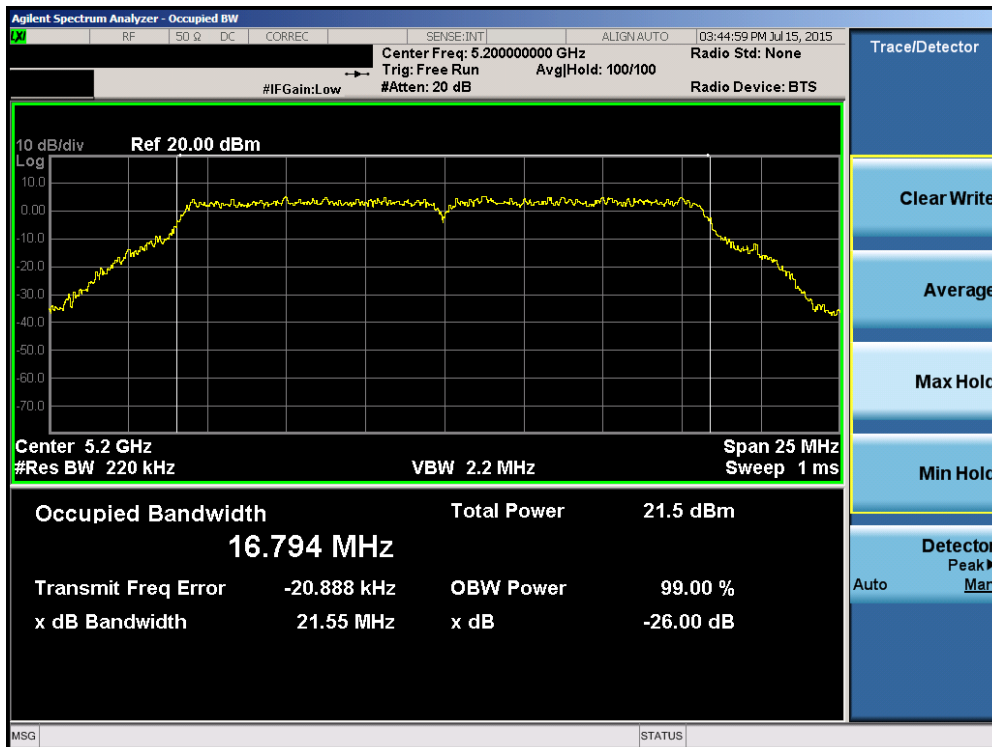


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 14 of 208

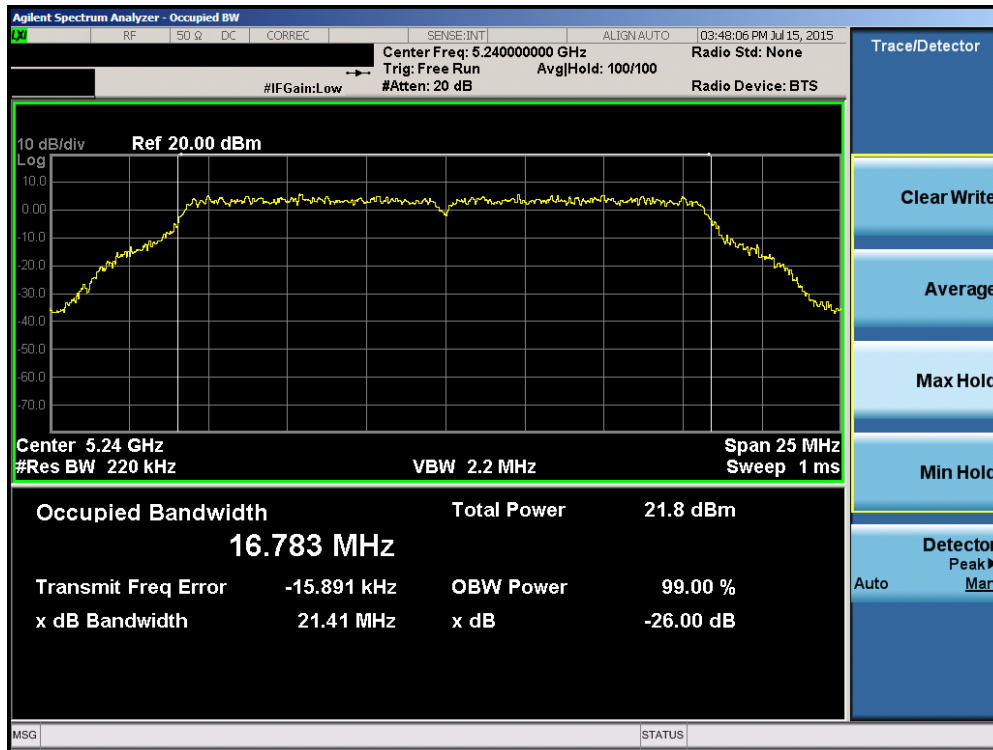


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

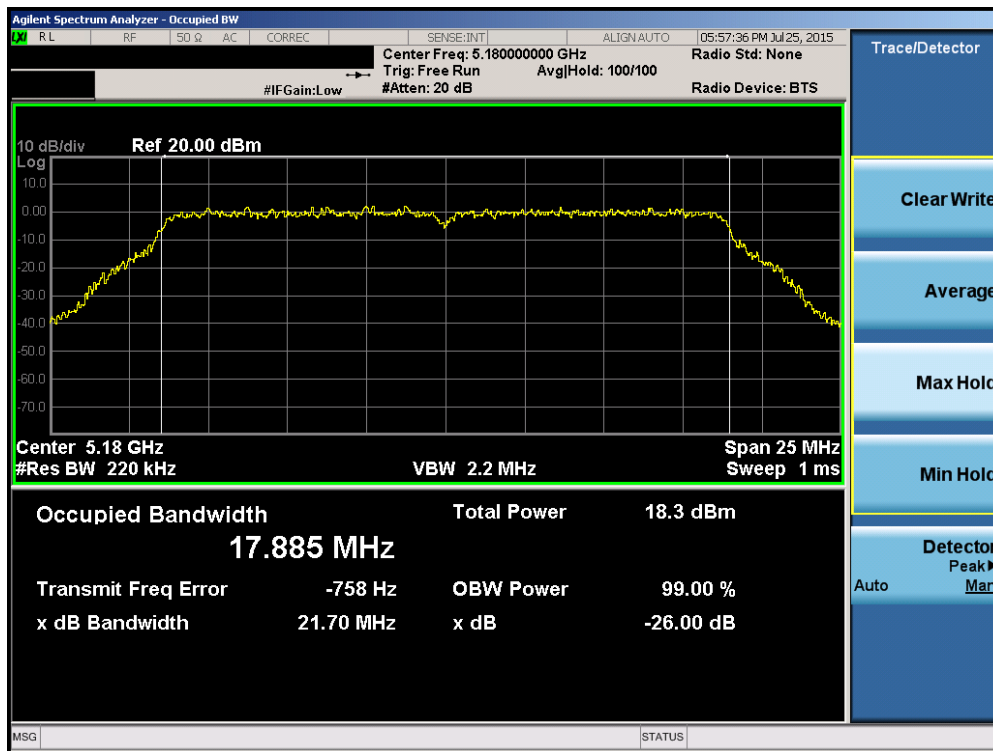


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 15 of 208

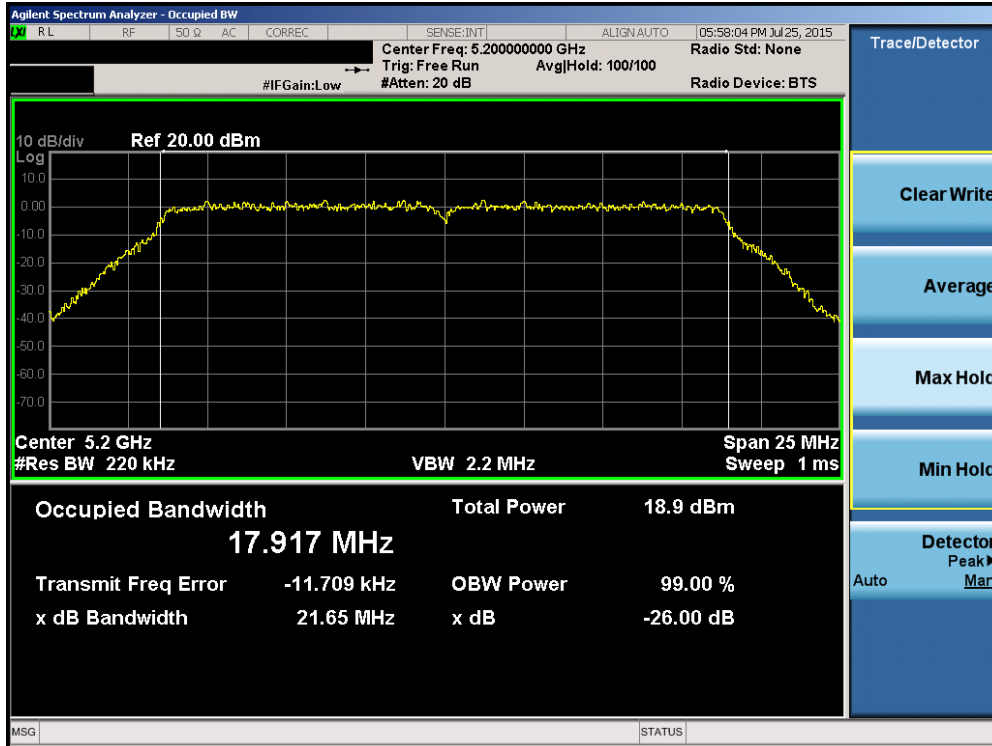


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

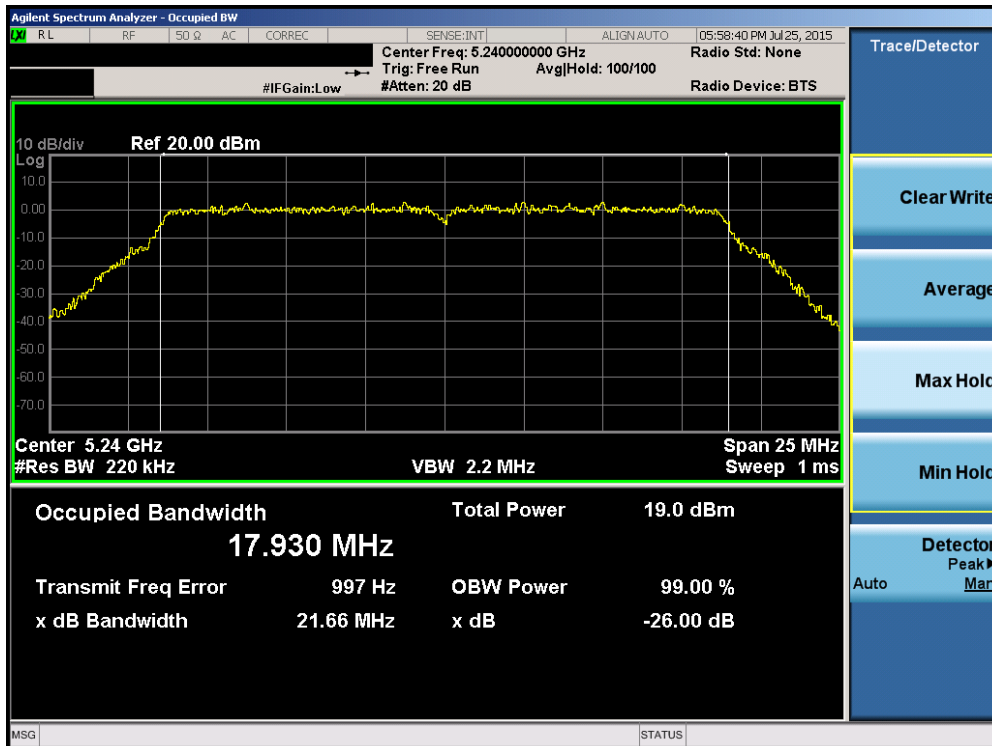


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 16 of 208

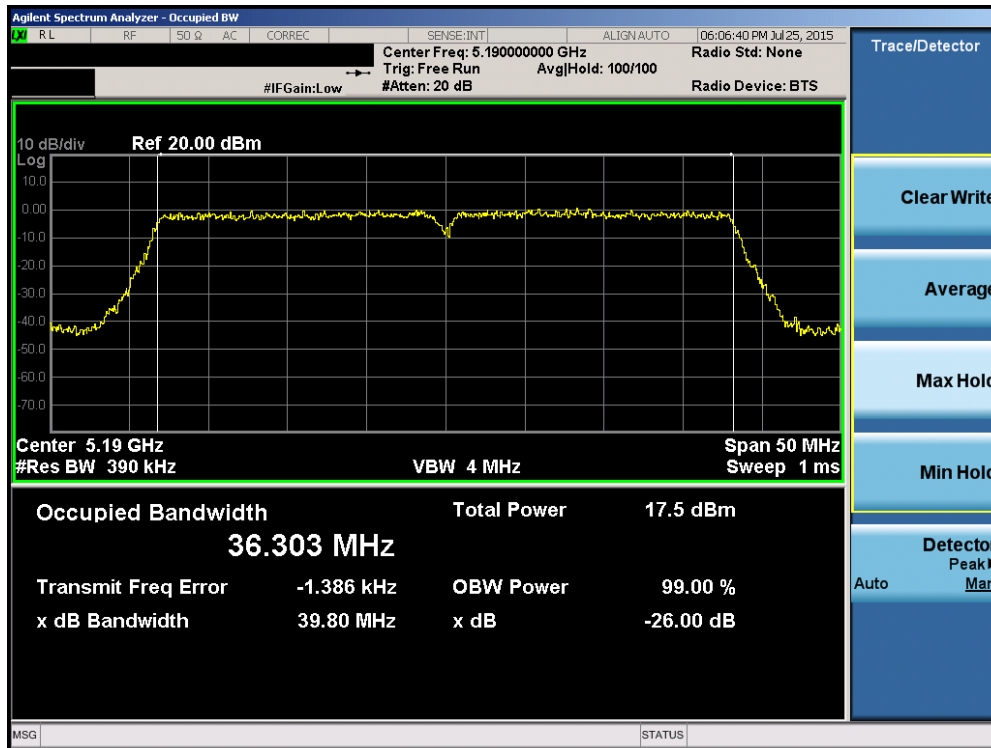


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

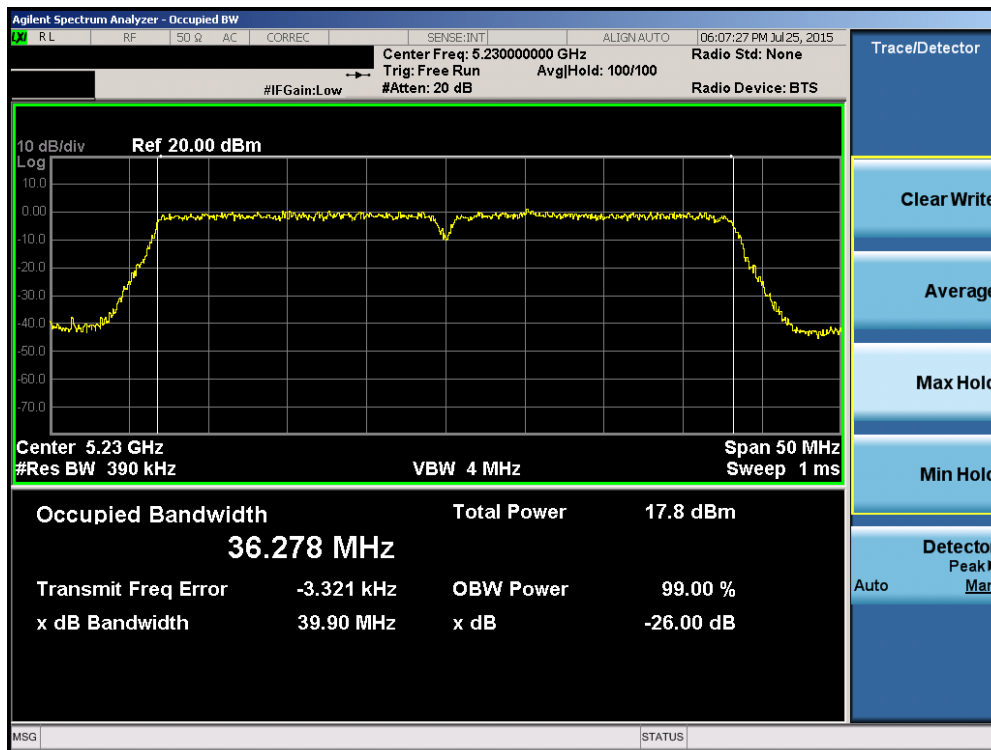


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 17 of 208

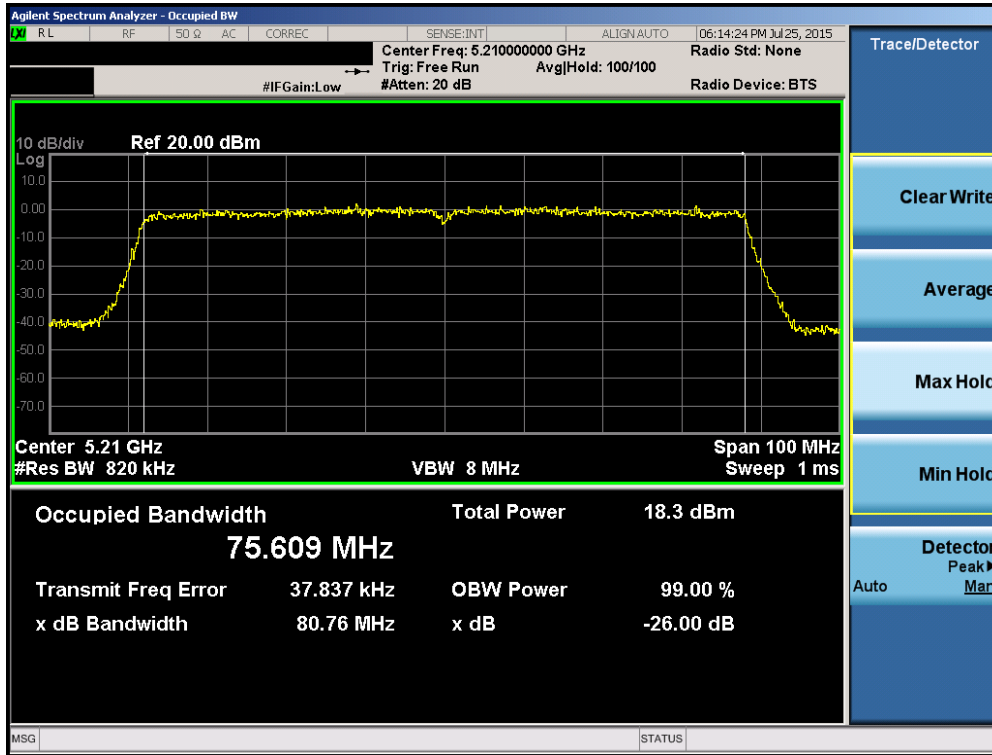


Plot 6-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

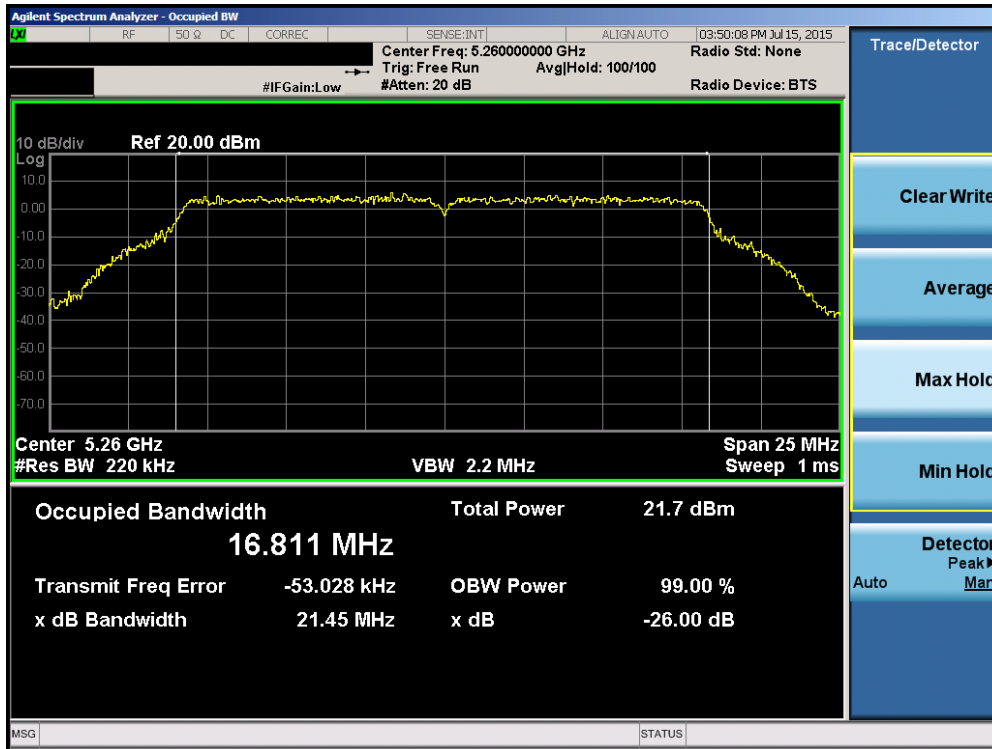


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 18 of 208

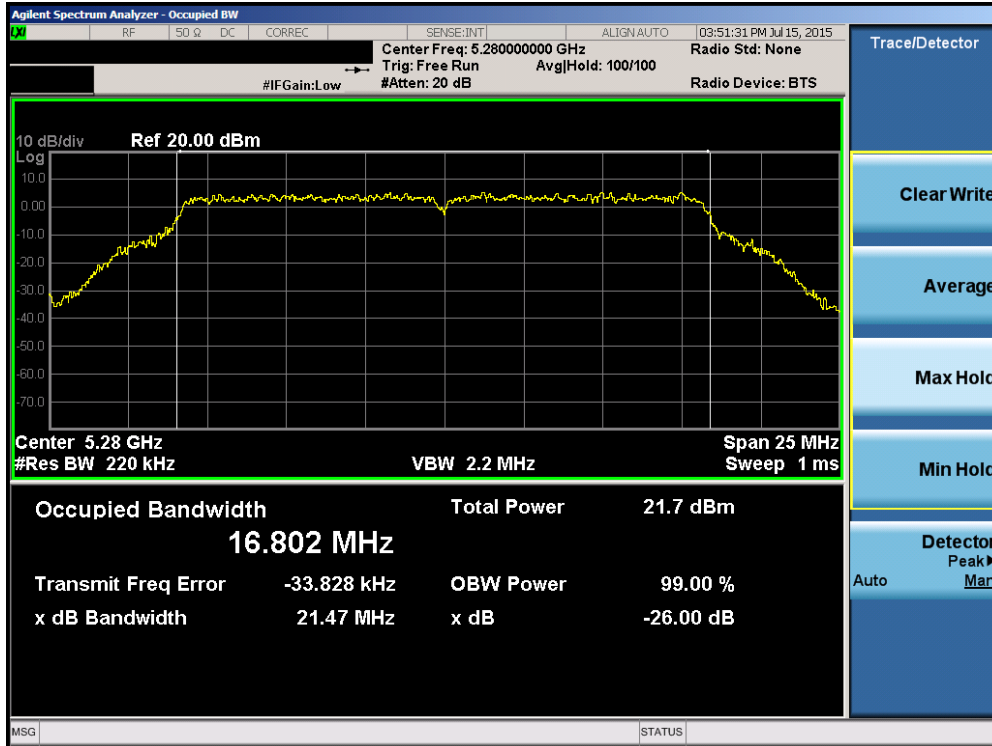


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

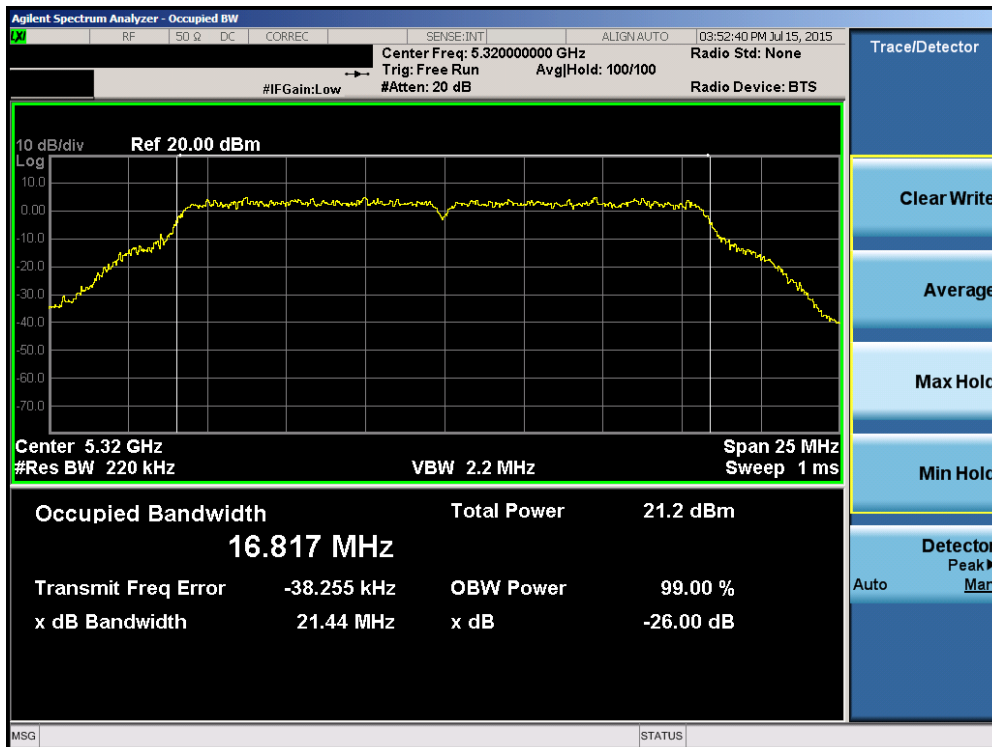


Plot 6-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 19 of 208

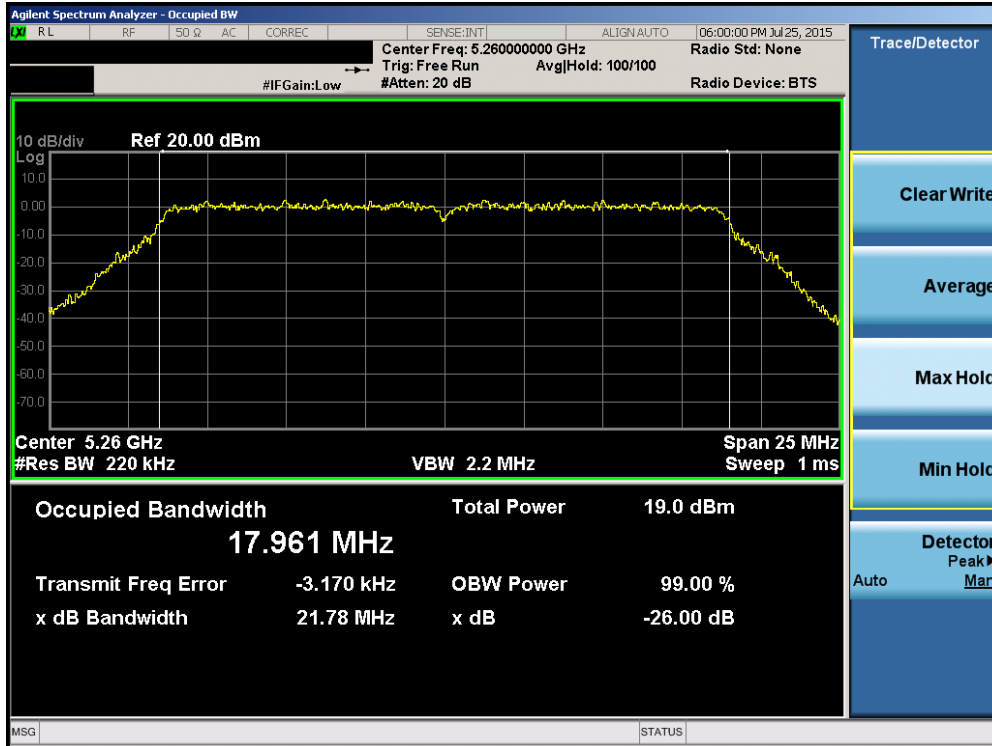


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

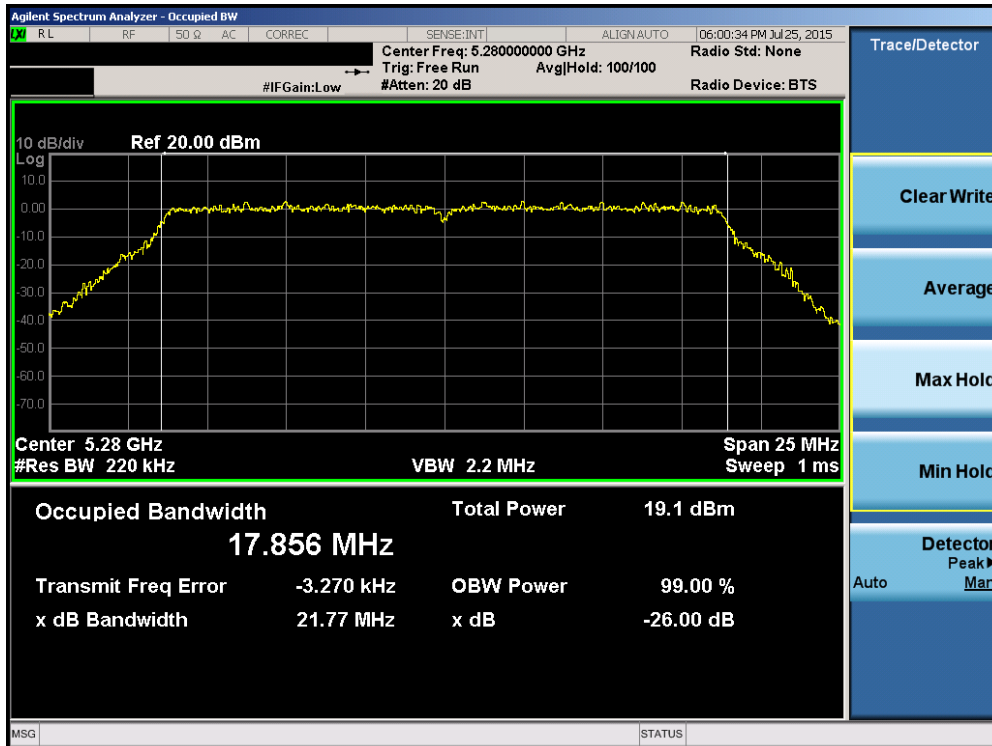


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 20 of 208

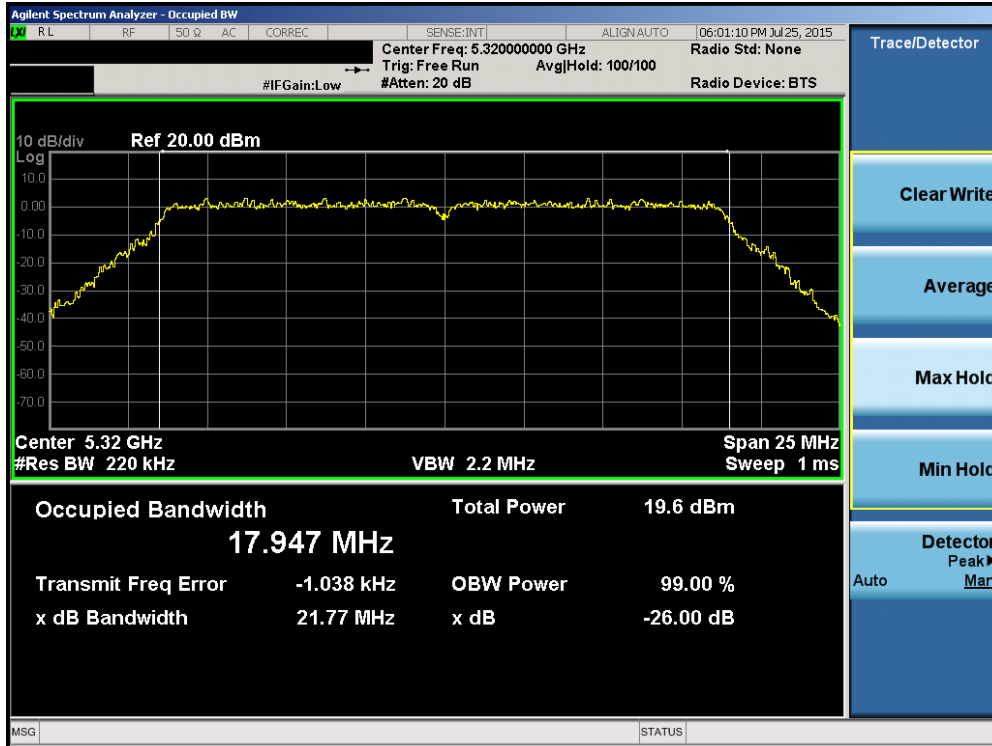


Plot 6-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

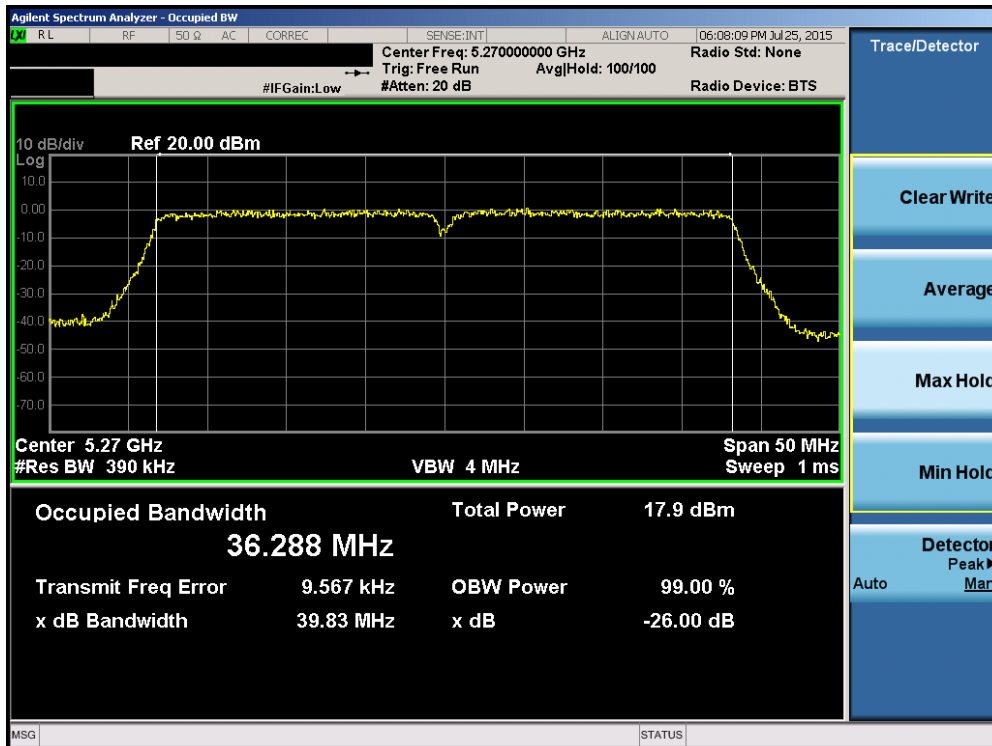


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 21 of 208

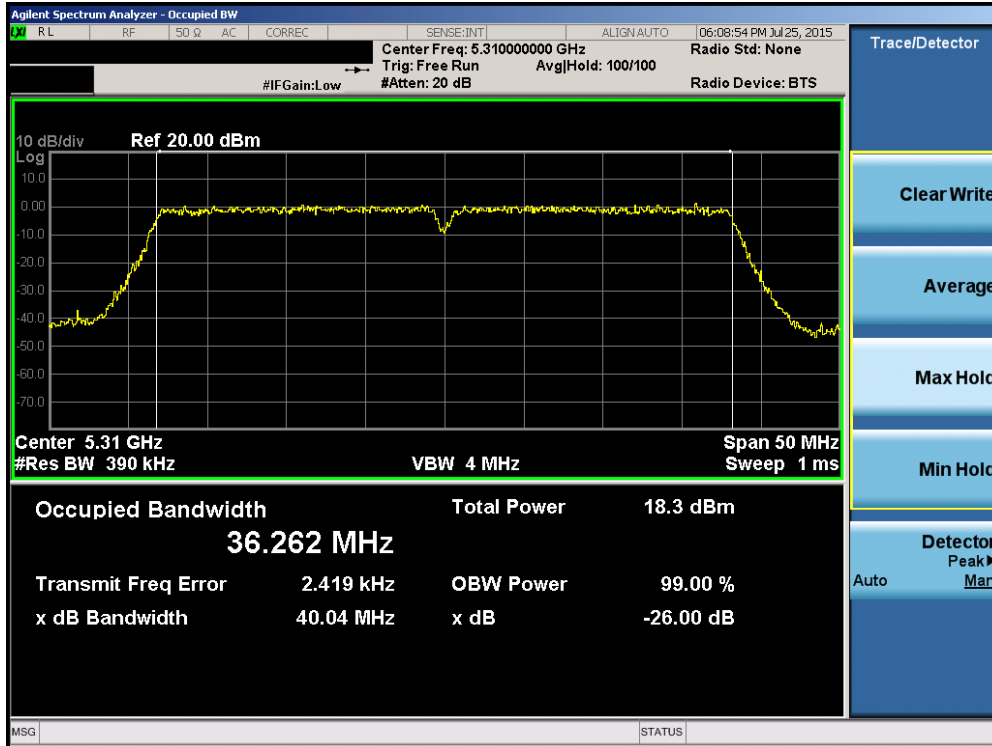


Plot 6-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

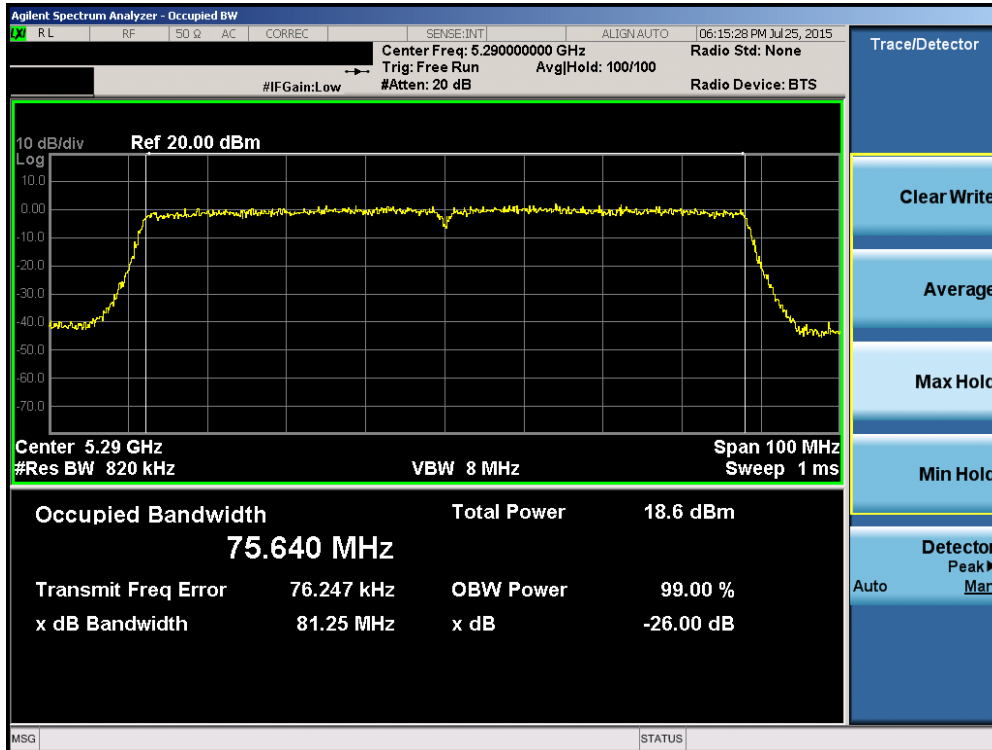


Plot 6-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 22 of 208

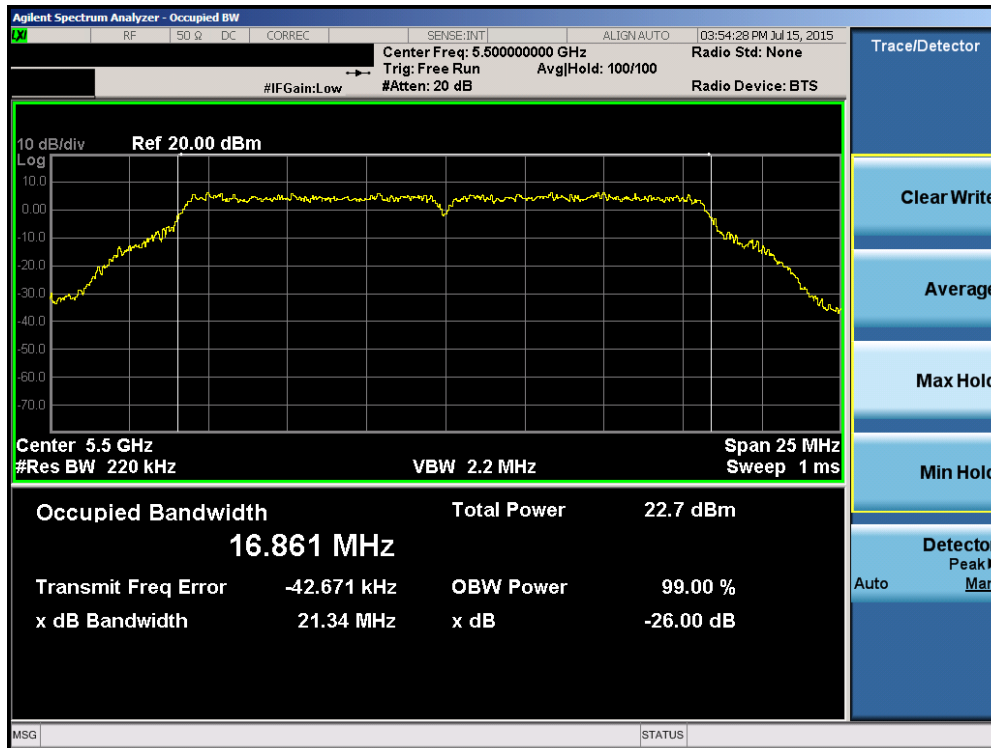


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

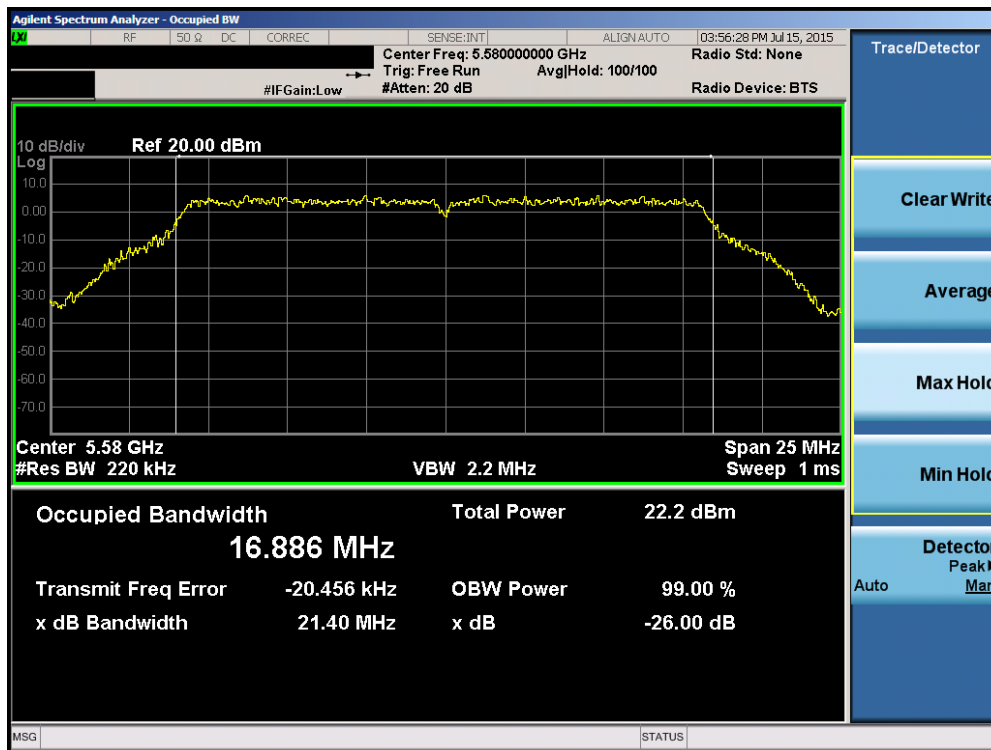


Plot 6-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 23 of 208

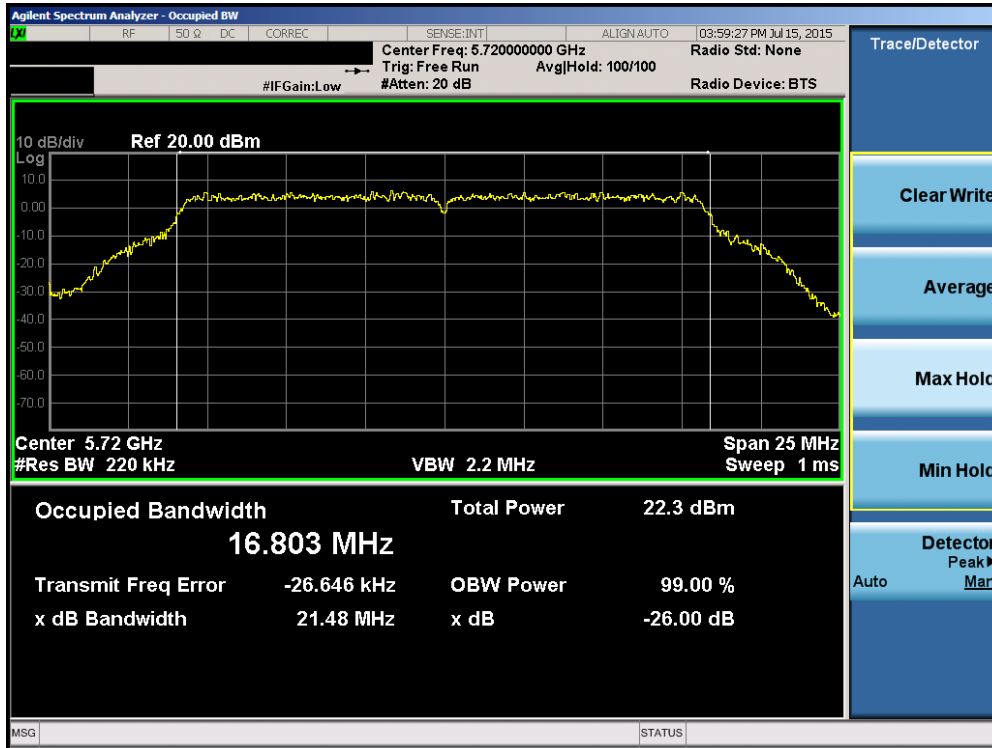


Plot 6-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 140144)

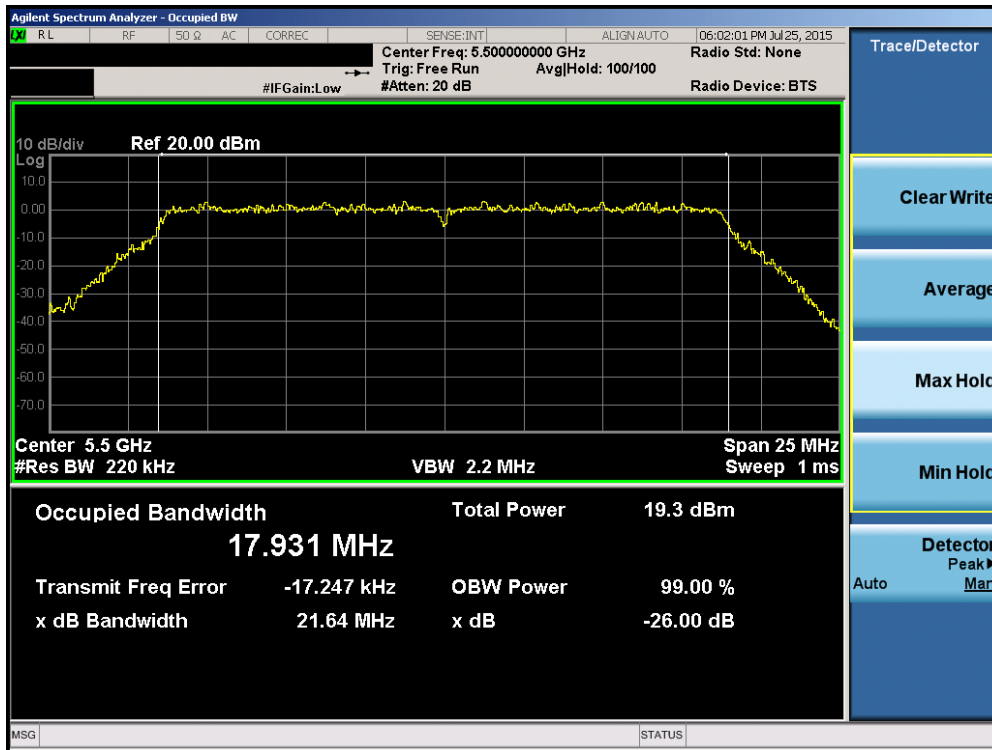


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 24 of 208

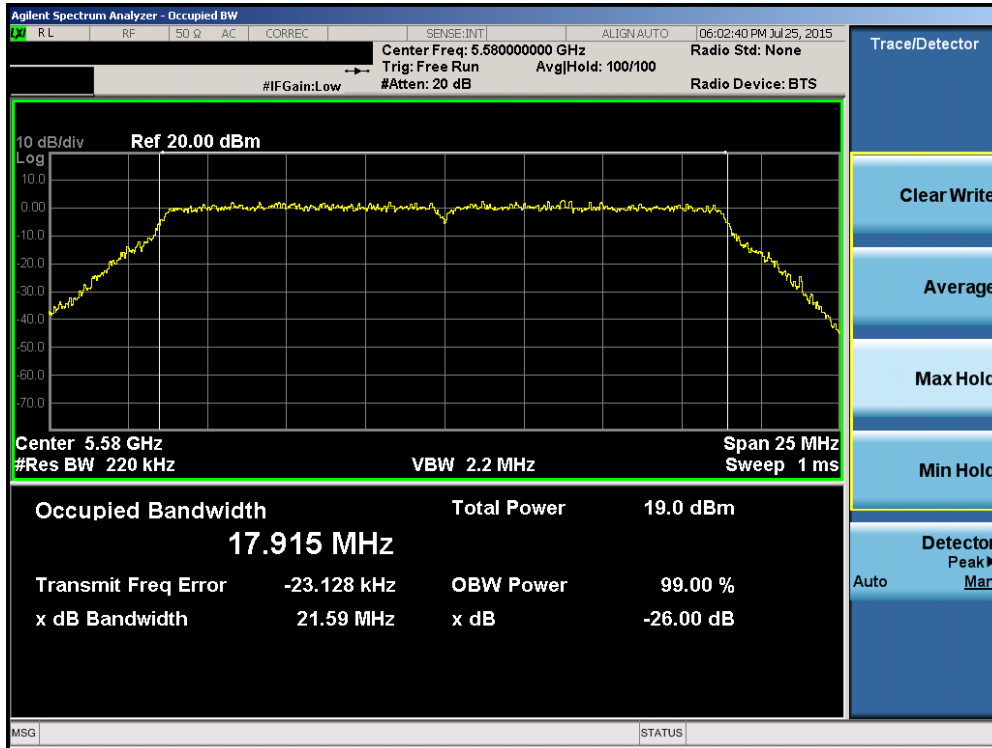


Plot 6-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

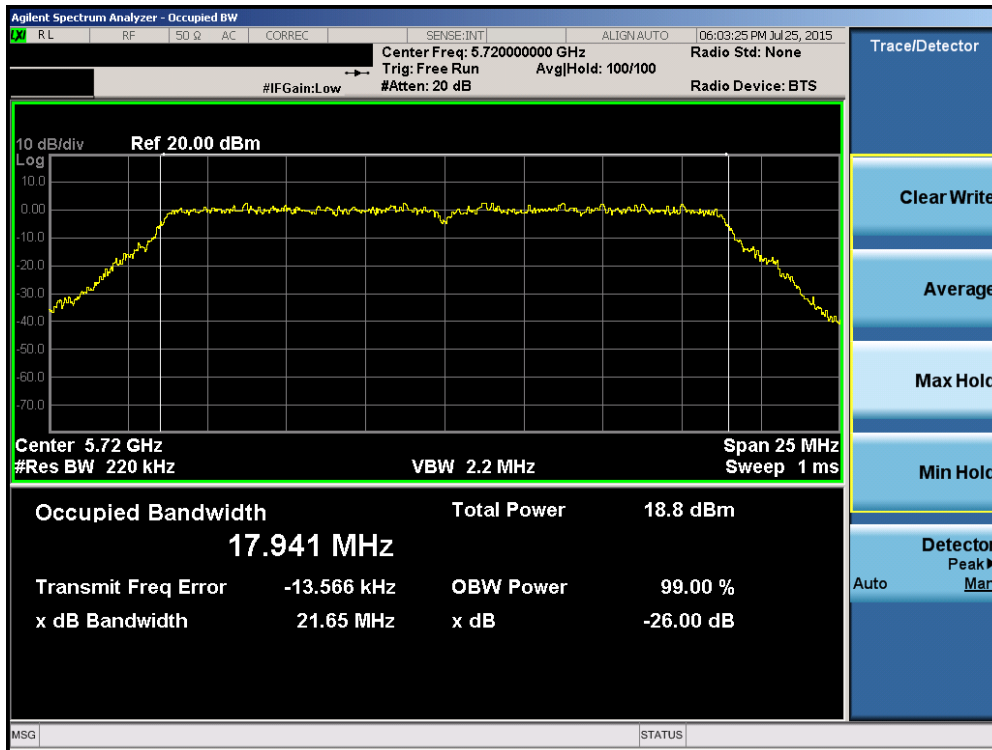


Plot 6-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 25 of 208

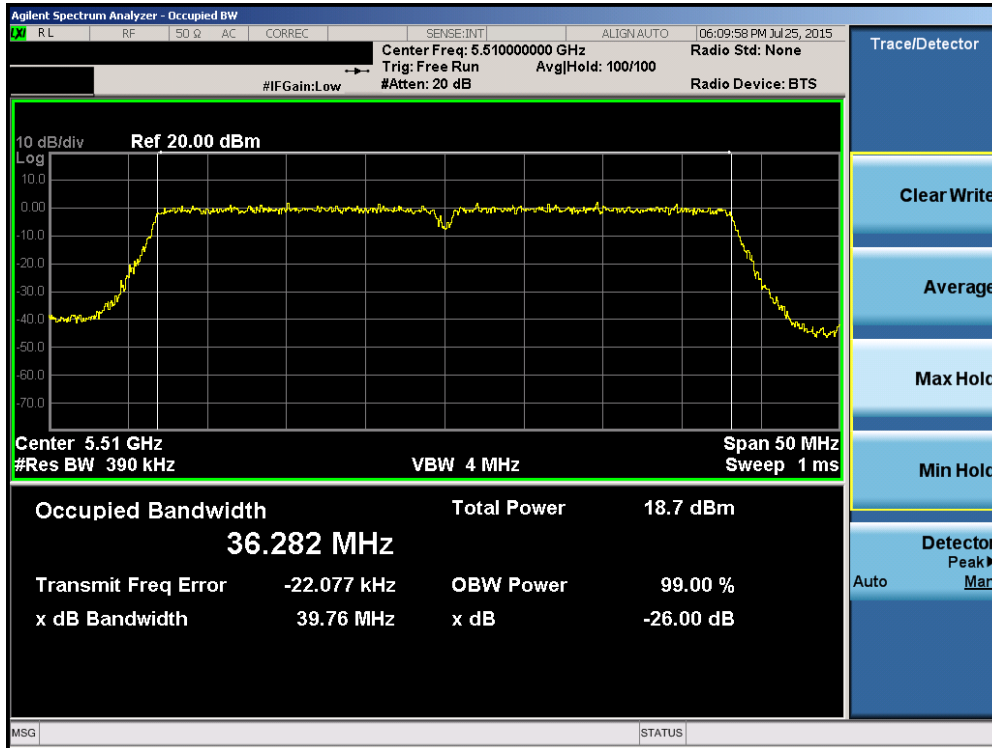


Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

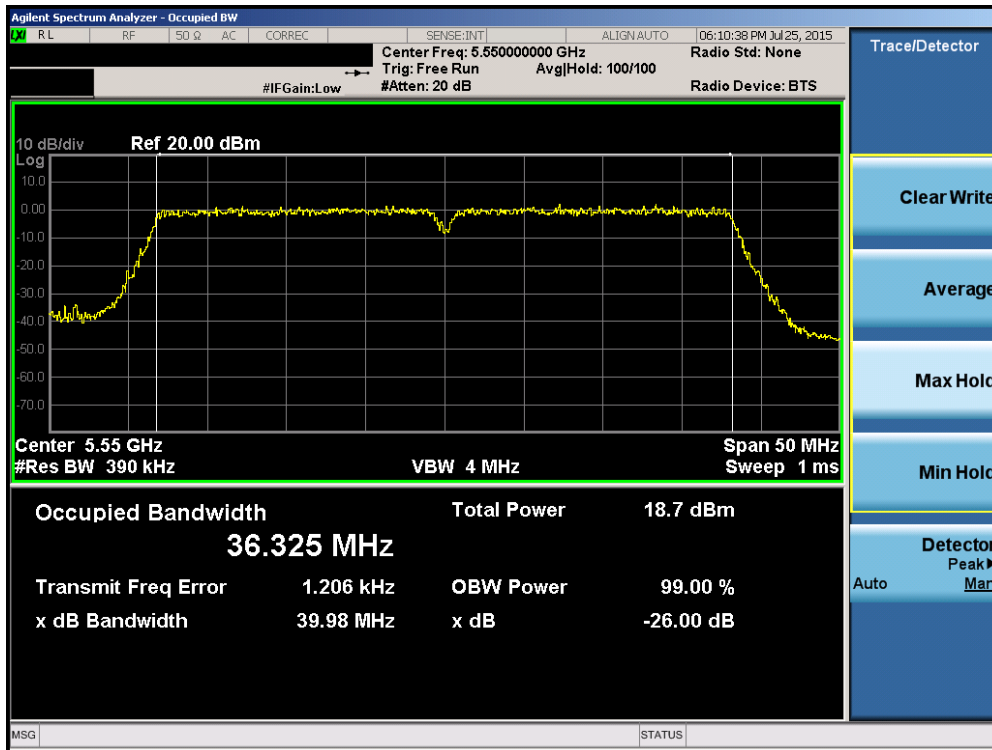


Plot 6-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 26 of 208

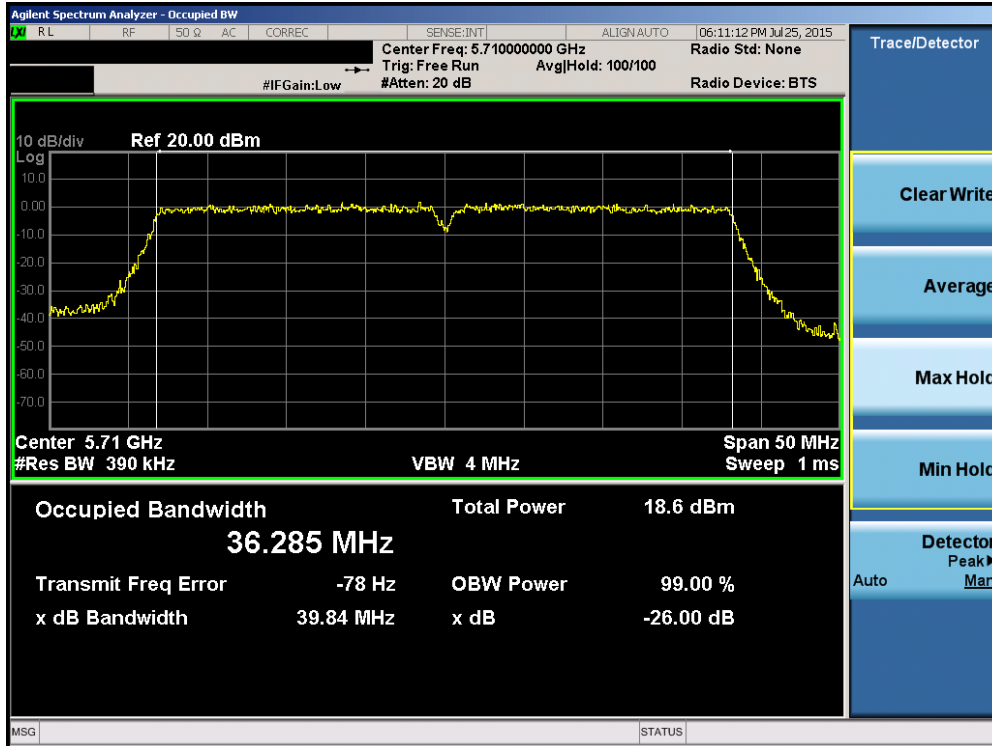


Plot 6-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

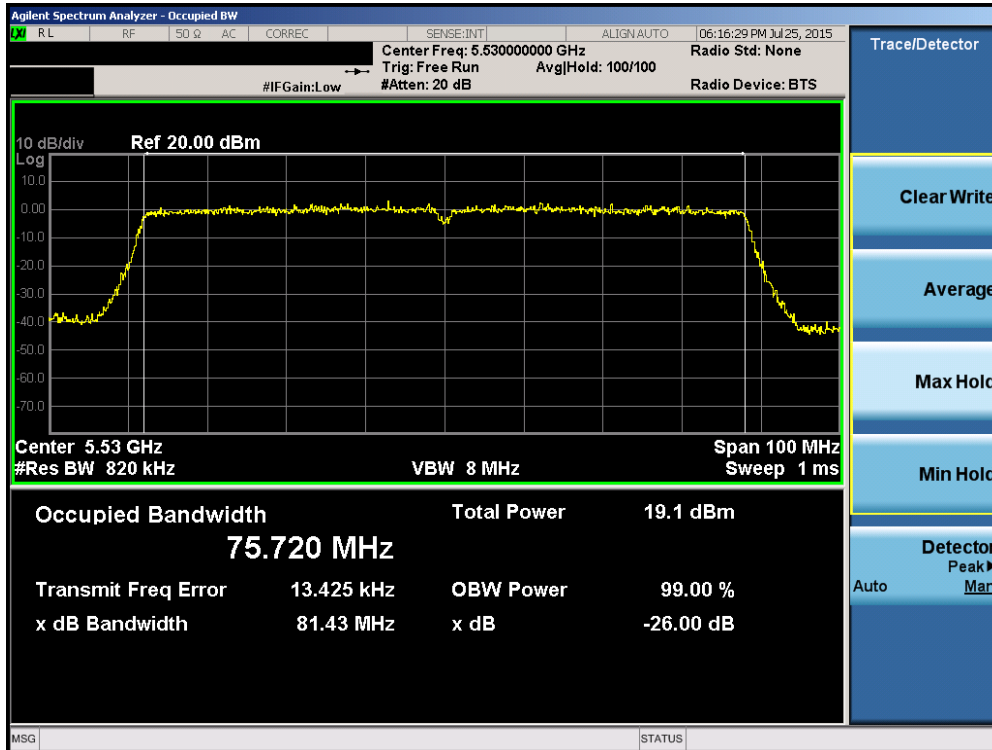

Plot 6-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 27 of 208

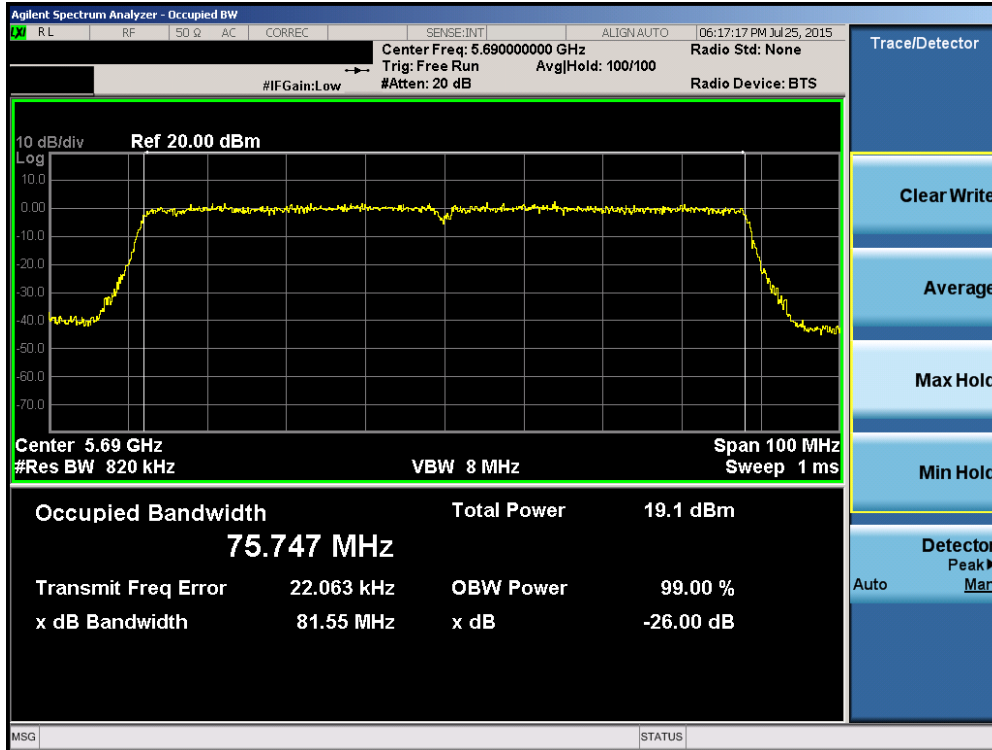



Plot 6-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 28 of 208

Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.67
	5200	40	a	6	21.36
	5240	48	a	6	21.45
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.49
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.68
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.73
	5190	38	n (40MHz)	13.5/15 (MCS0)	40.08
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.80
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.66
Band 2A	5260	52	a	6	21.70
	5280	56	a	6	21.68
	5320	64	a	6	21.45
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.67
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.65
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.74
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.67
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.80
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.35
Band 2C	5500	100	a	6	21.66
	5580	116	a	6	21.51
	5720	144	a	6	21.20
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.70
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.71
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.67
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.85
	5550	110	n (40MHz)	13.5/15 (MCS0)	40.16
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.73
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.57
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.72

Table 6-3. Conducted Bandwidth Measurements

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 29 of 208	

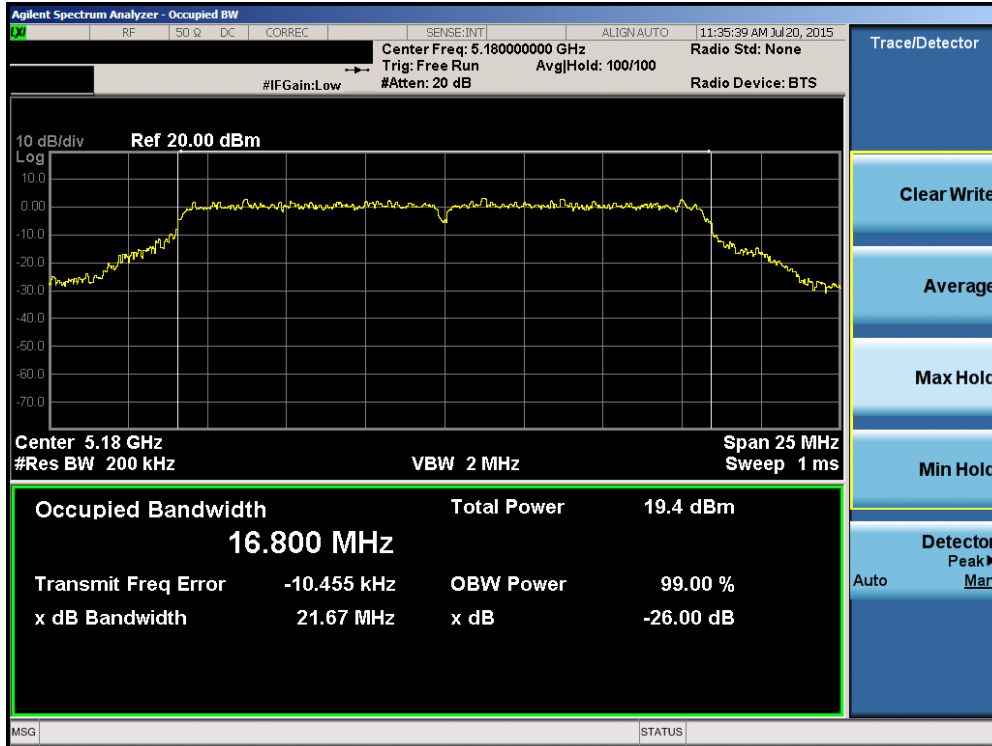


Plot 6-30. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

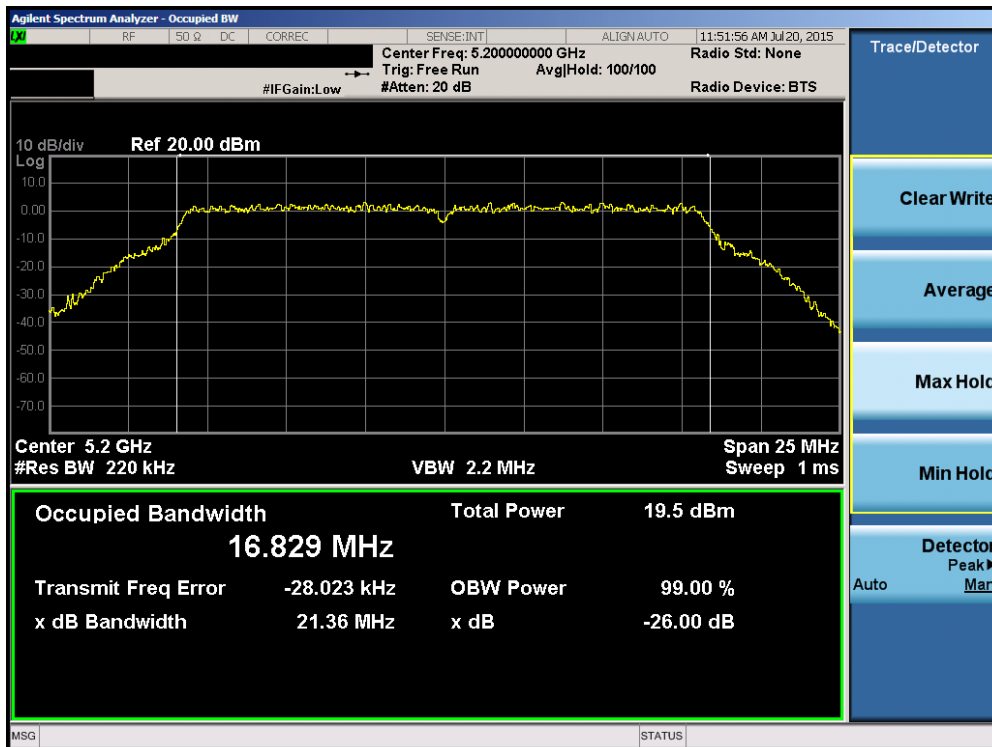


Plot 6-31. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 30 of 208

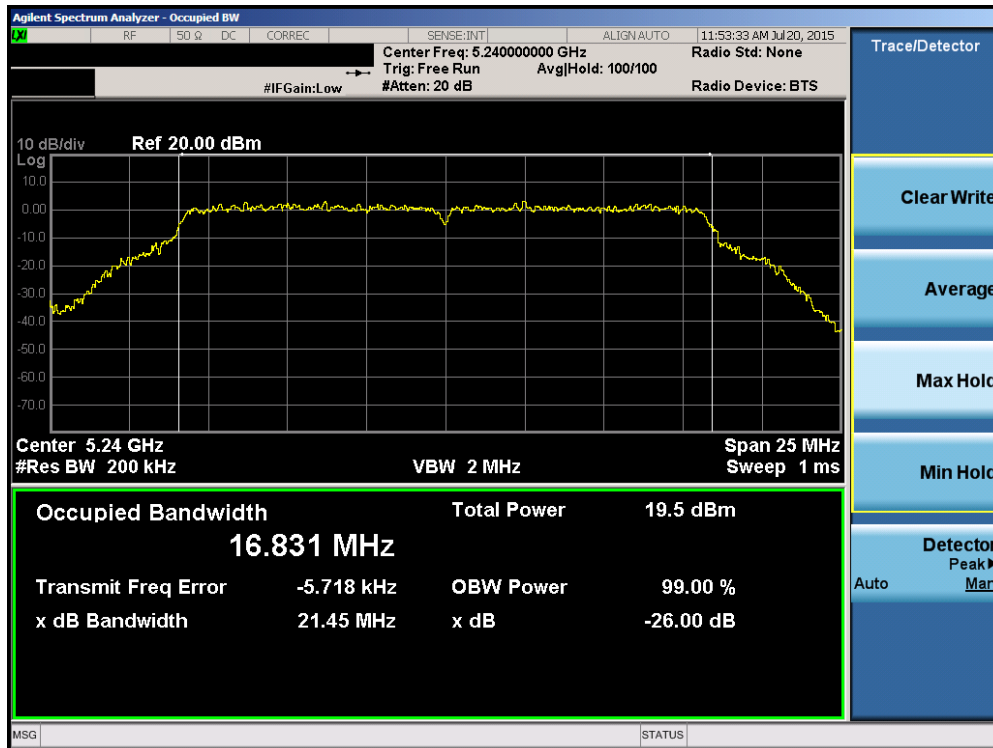


Plot 6-32. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

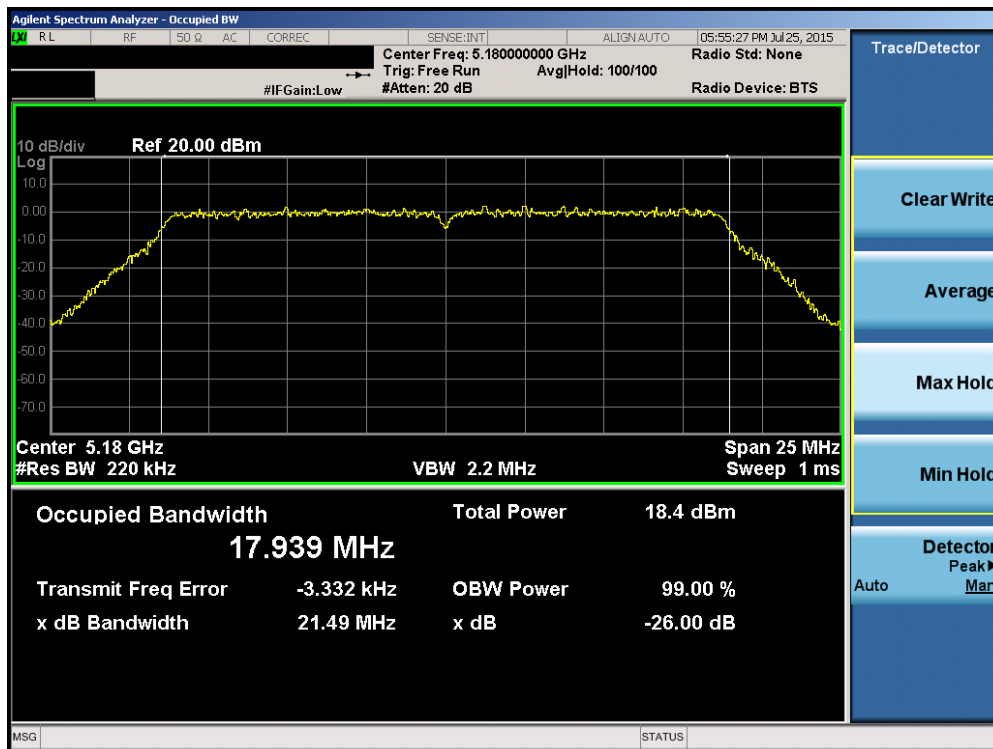


Plot 6-33. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 31 of 208

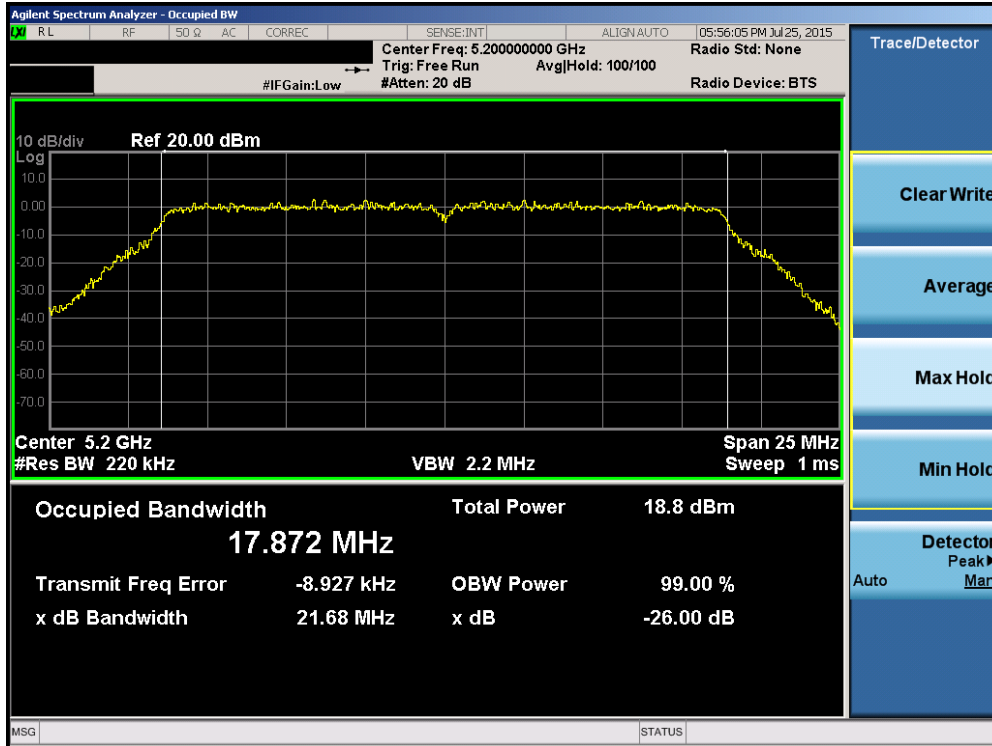


Plot 6-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

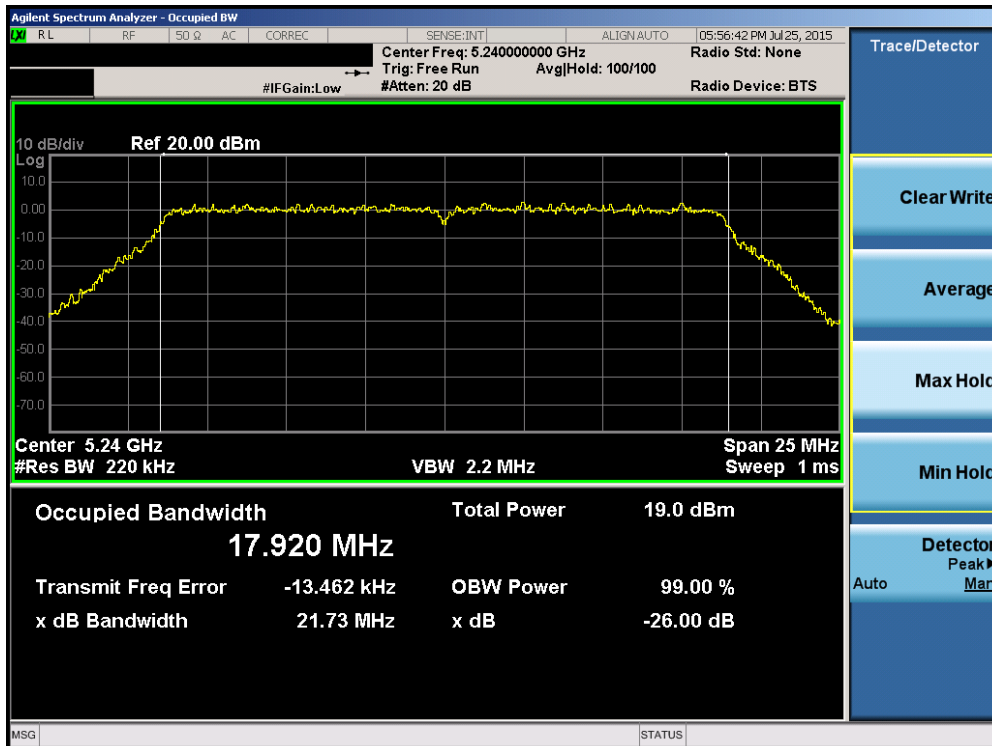


Plot 6-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 32 of 208	

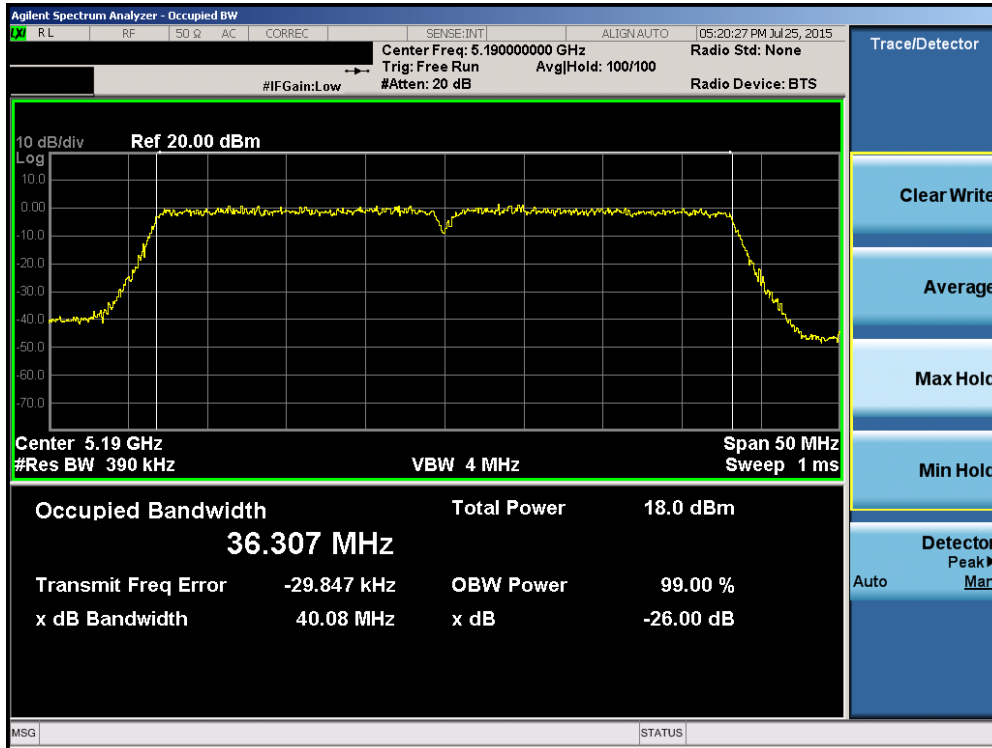


Plot 6-36. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

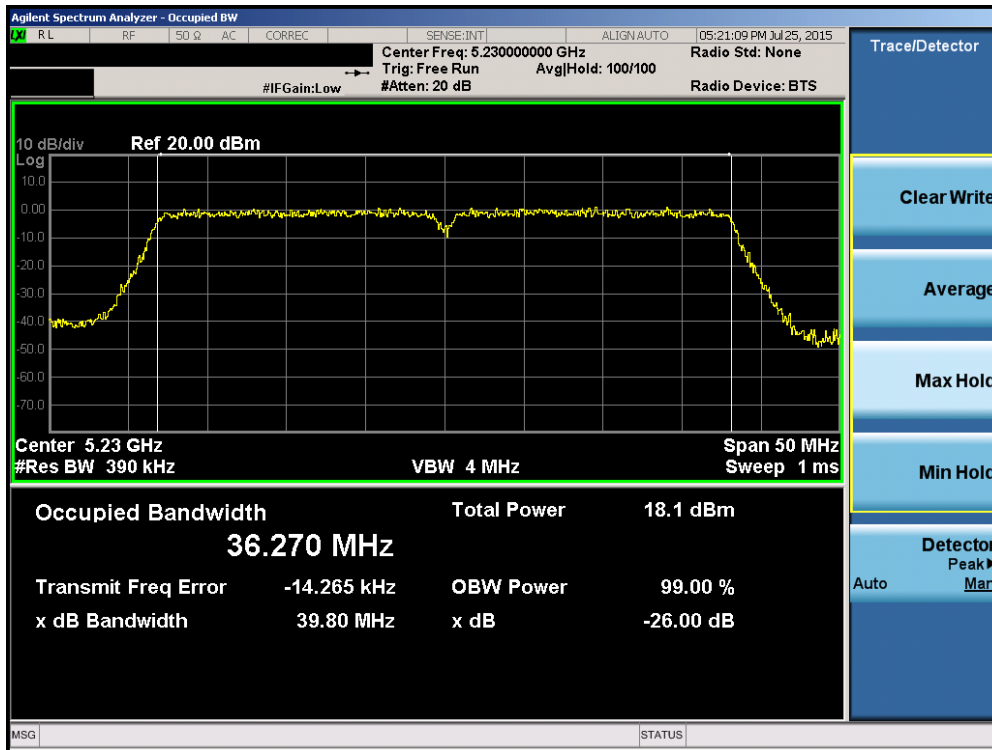


Plot 6-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 33 of 208

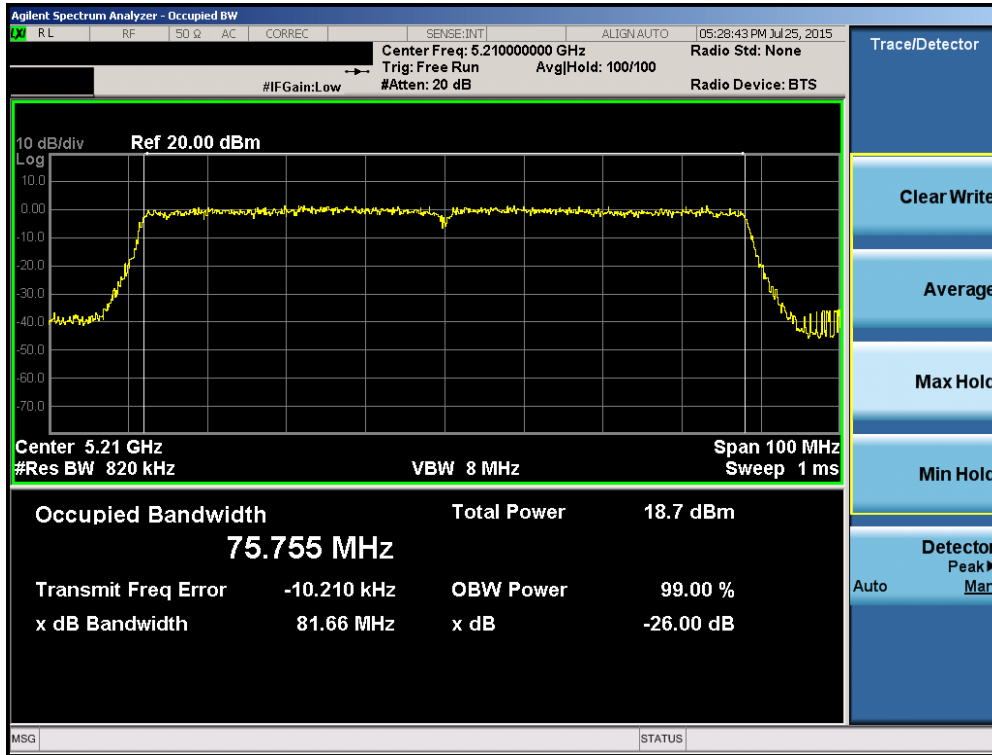


Plot 6-38. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

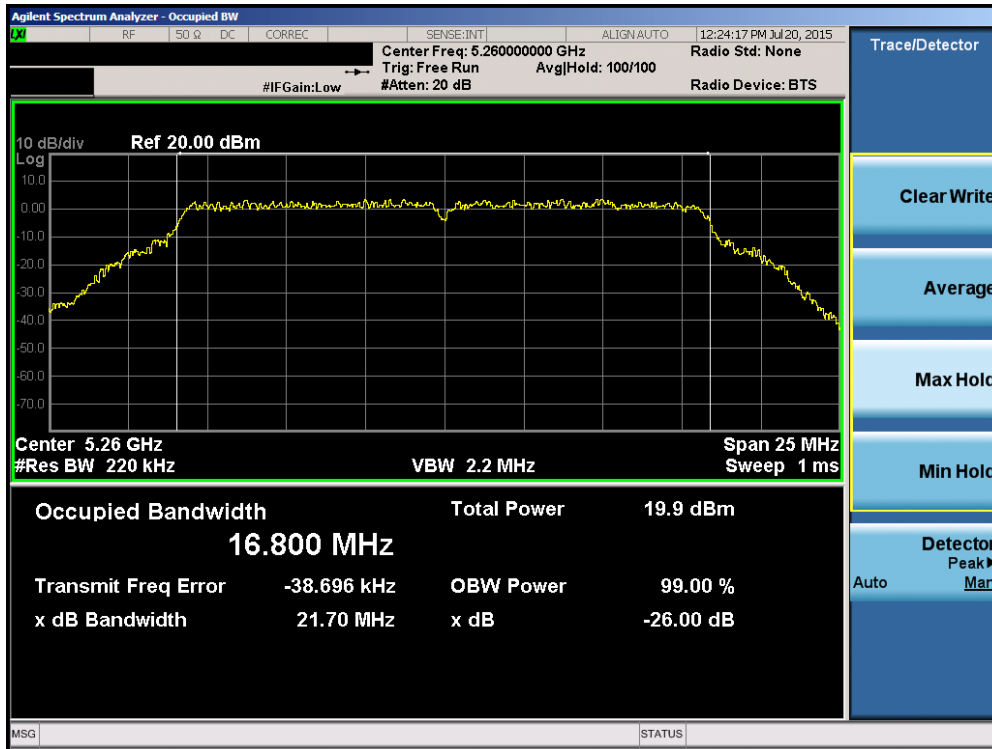


Plot 6-39. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 34 of 208

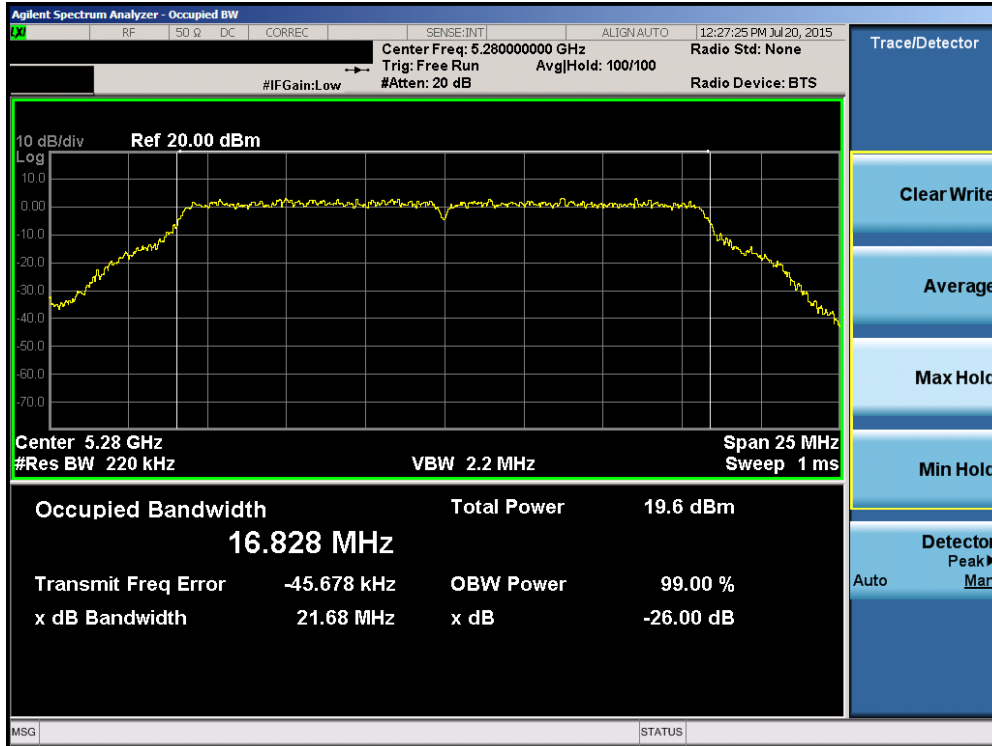


Plot 6-40. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

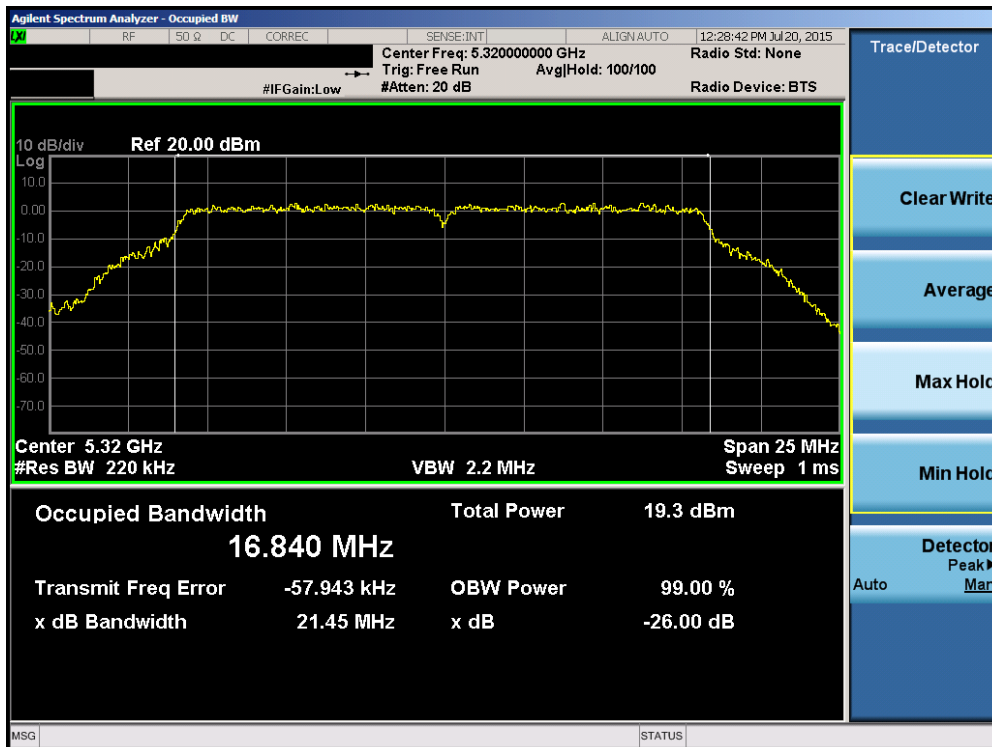


Plot 6-41. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 35 of 208

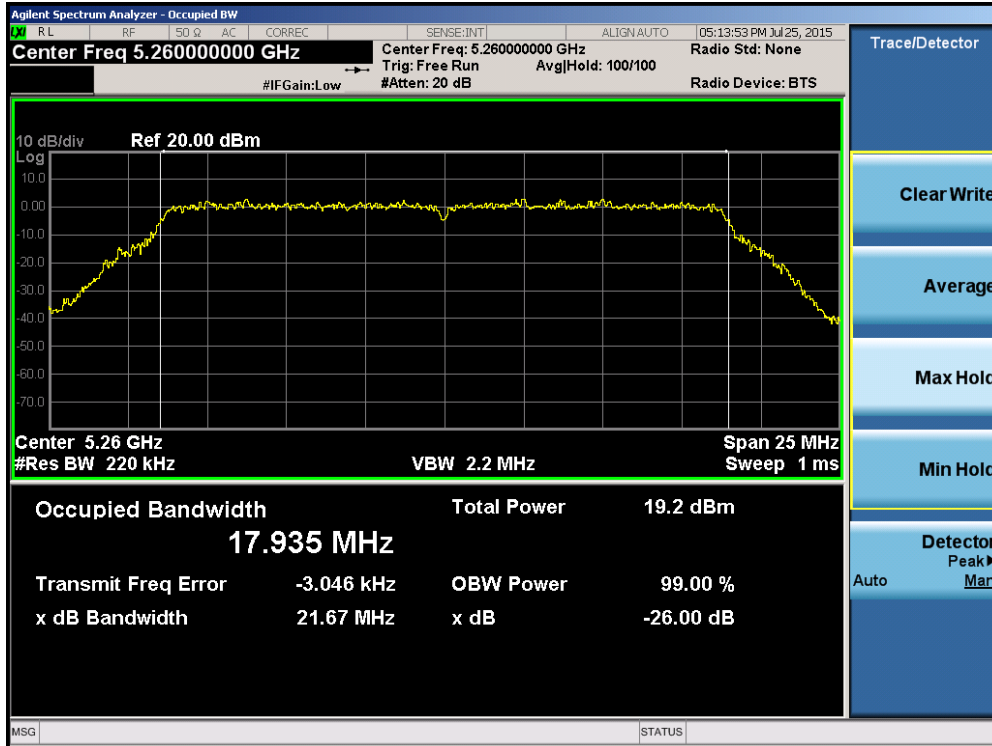


Plot 6-42. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

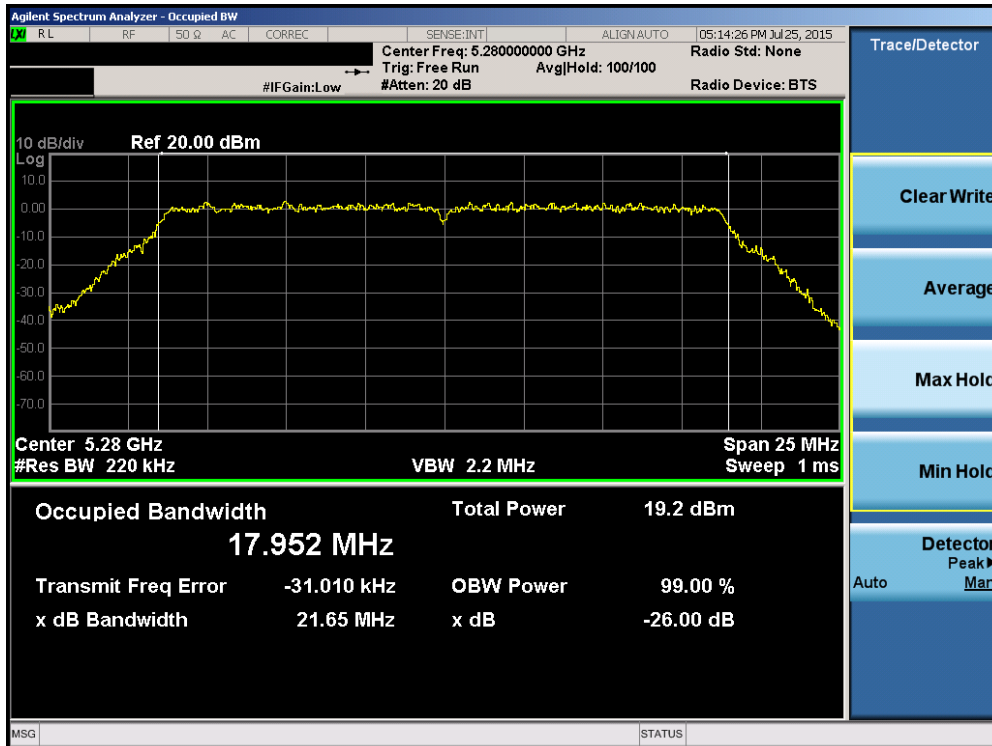


Plot 6-43. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 36 of 208

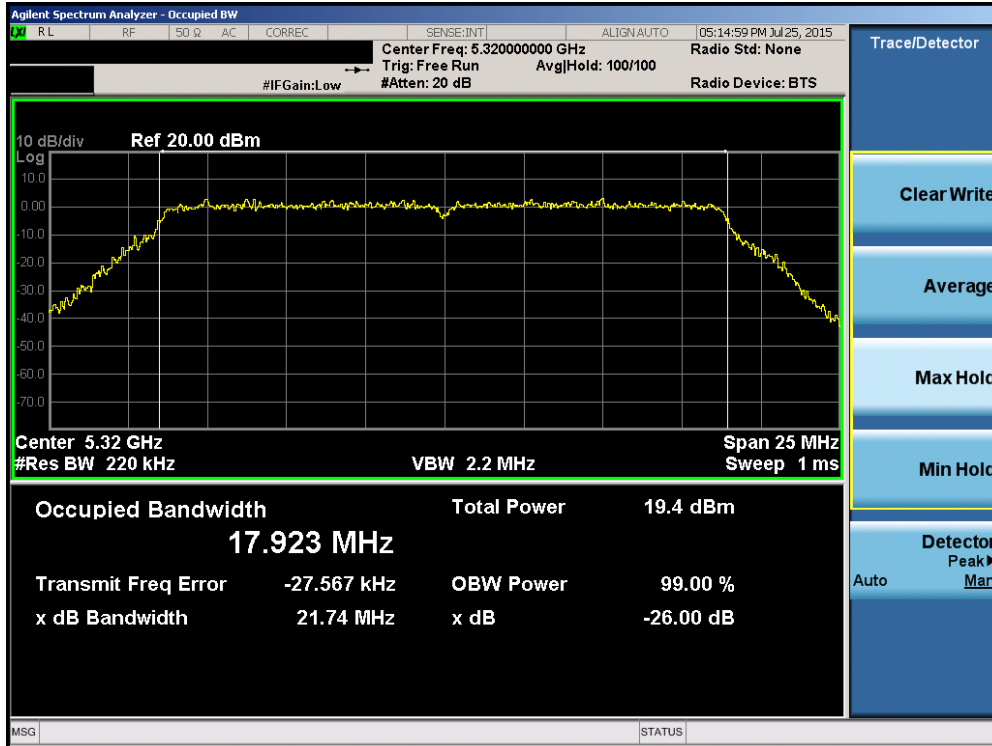


Plot 6-44. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

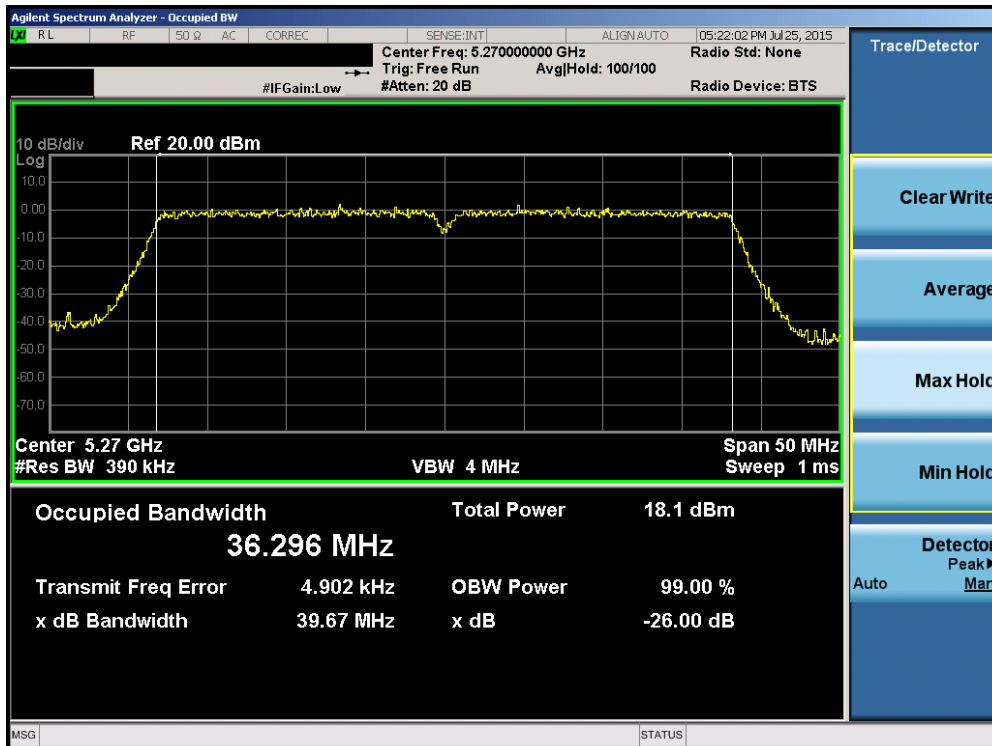


Plot 6-45. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 37 of 208

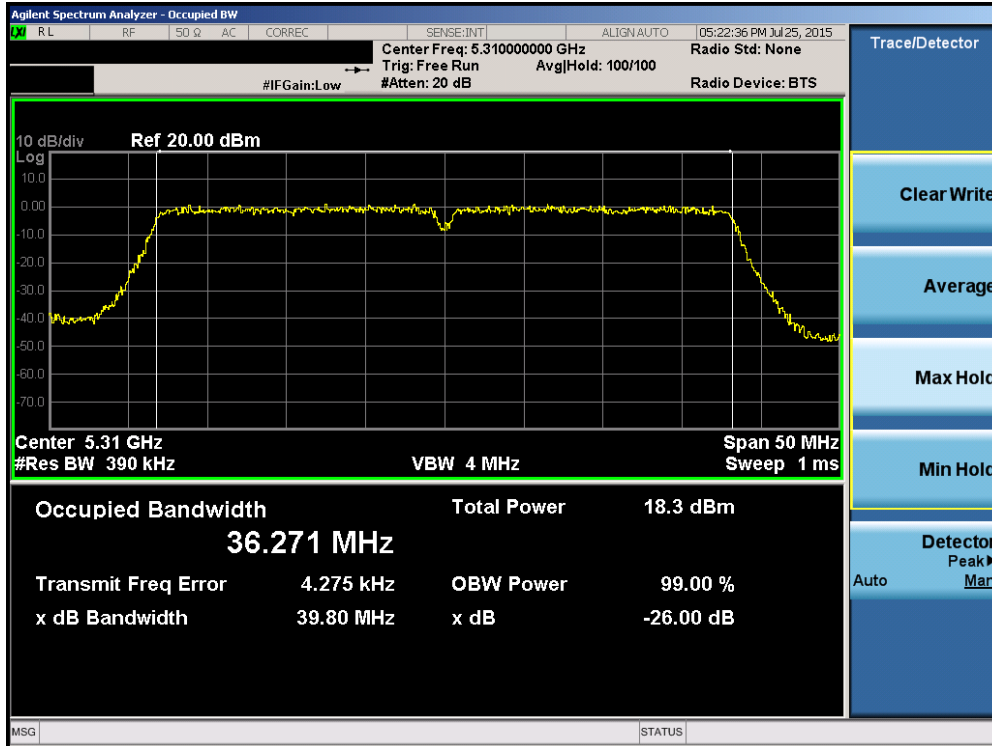


Plot 6-46. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

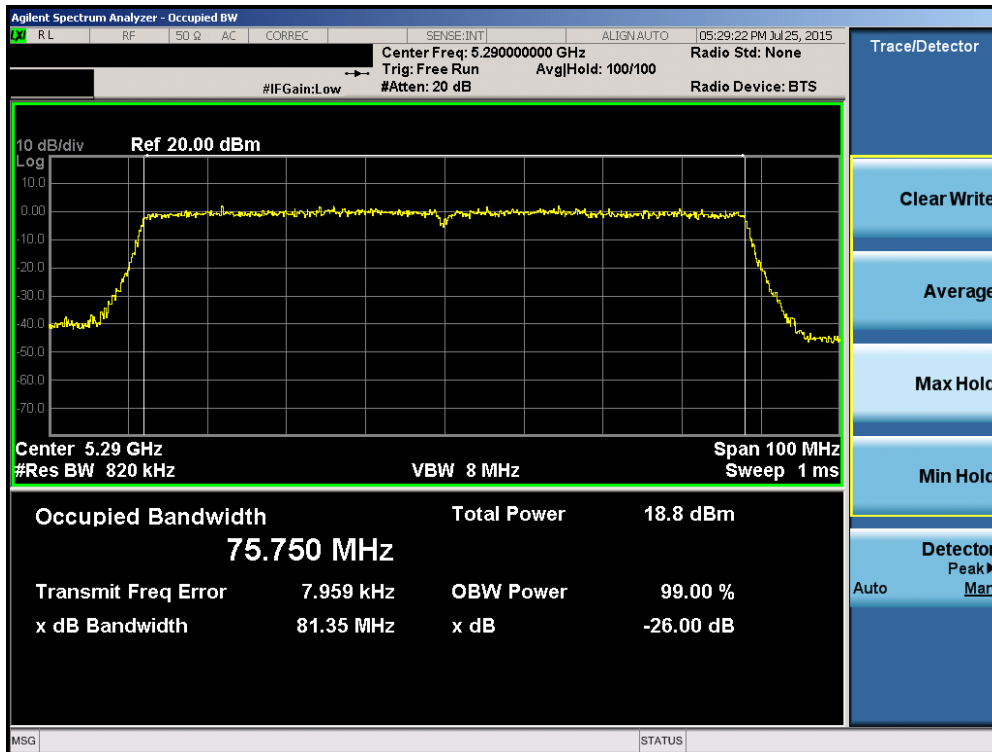


Plot 6-47. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 38 of 208

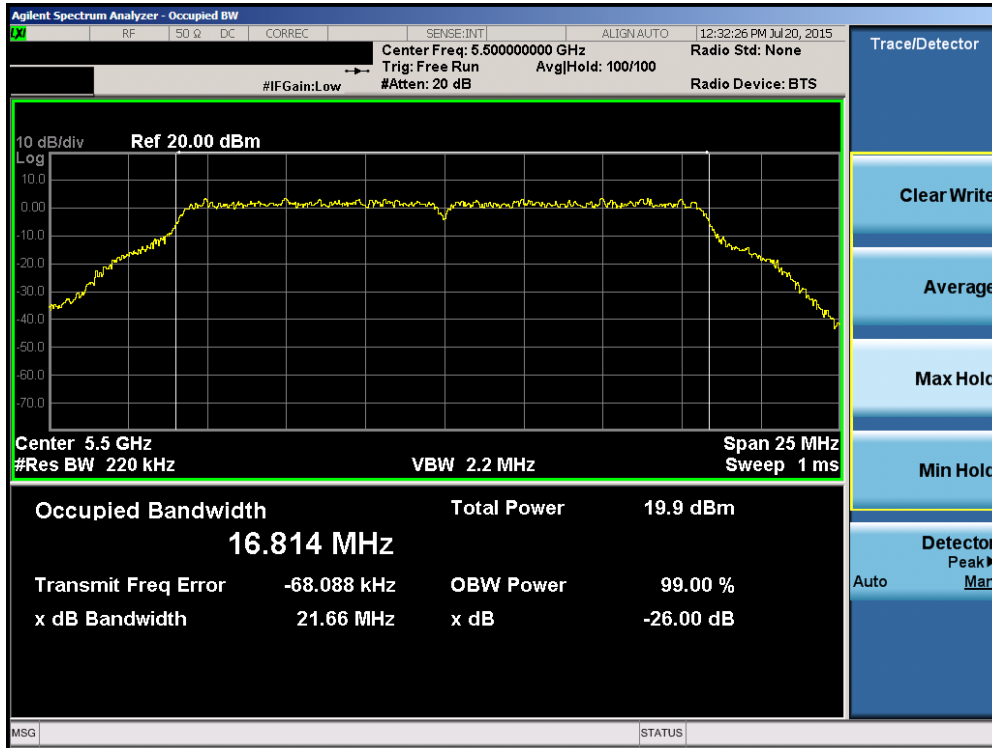


Plot 6-48. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

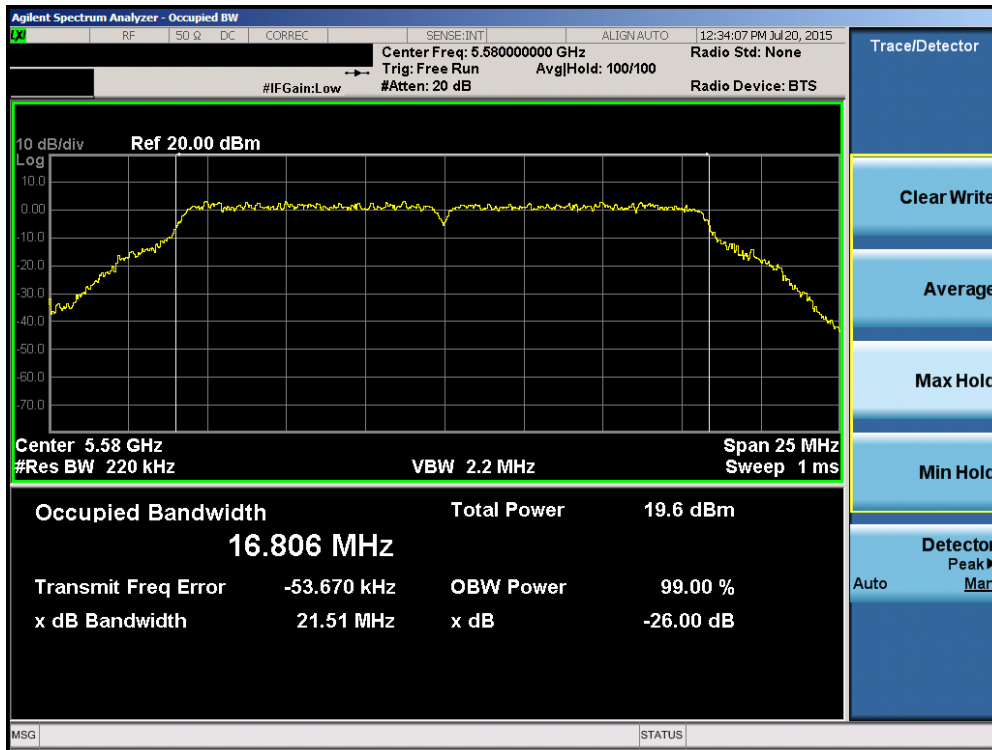


Plot 6-49. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMT817P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 39 of 208

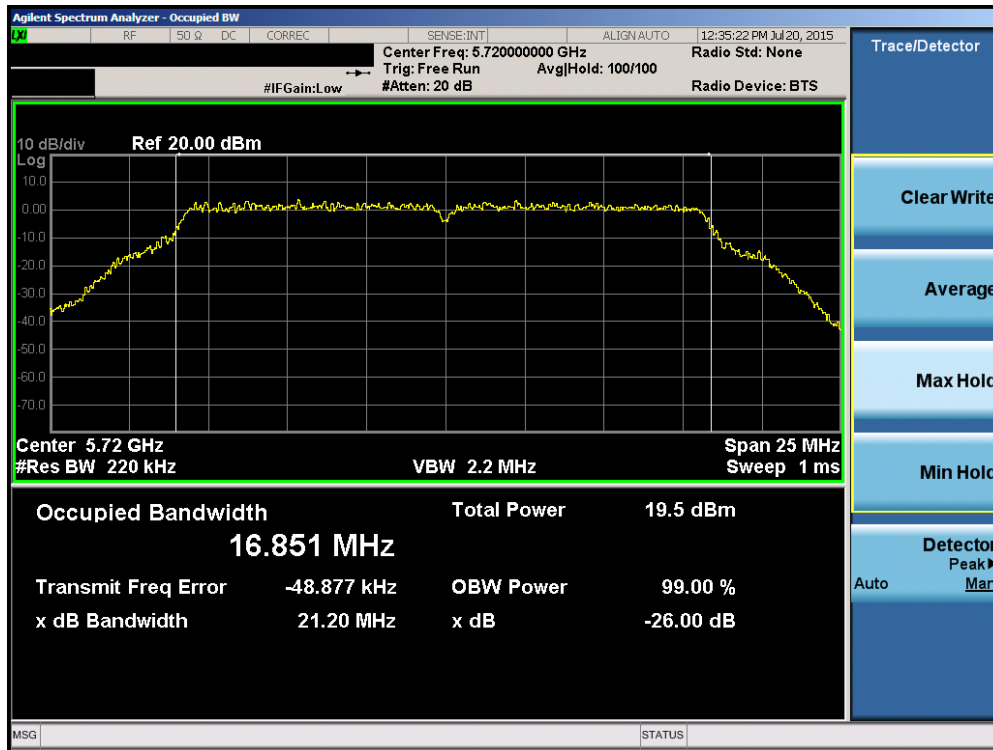


Plot 6-50. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

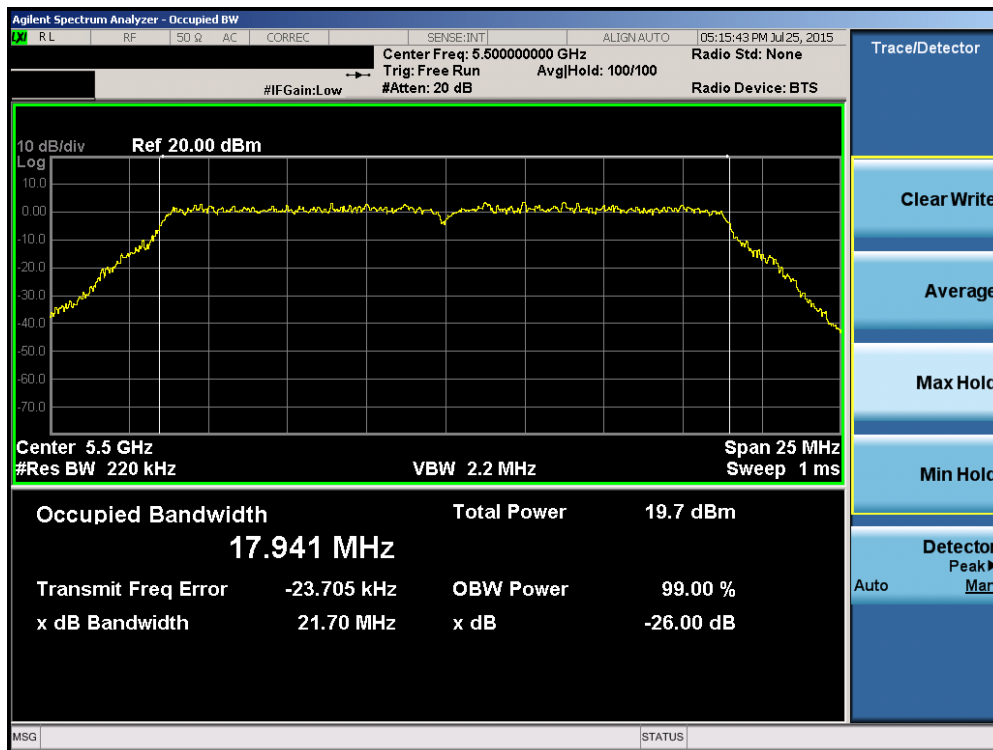


Plot 6-51. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 40 of 208

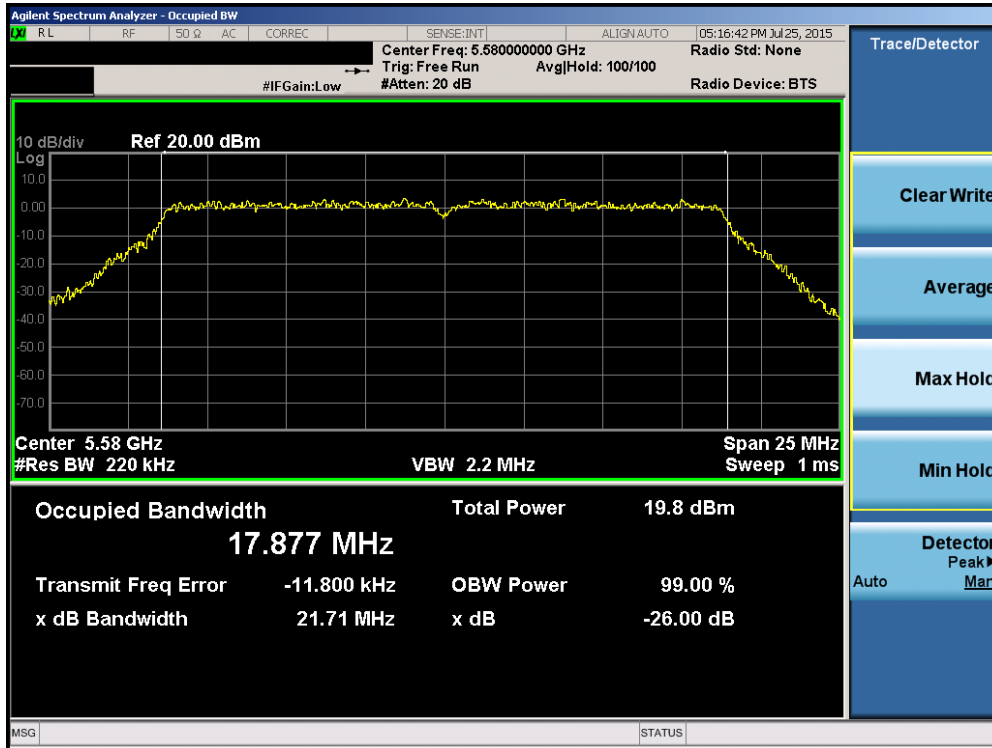


Plot 6-52. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

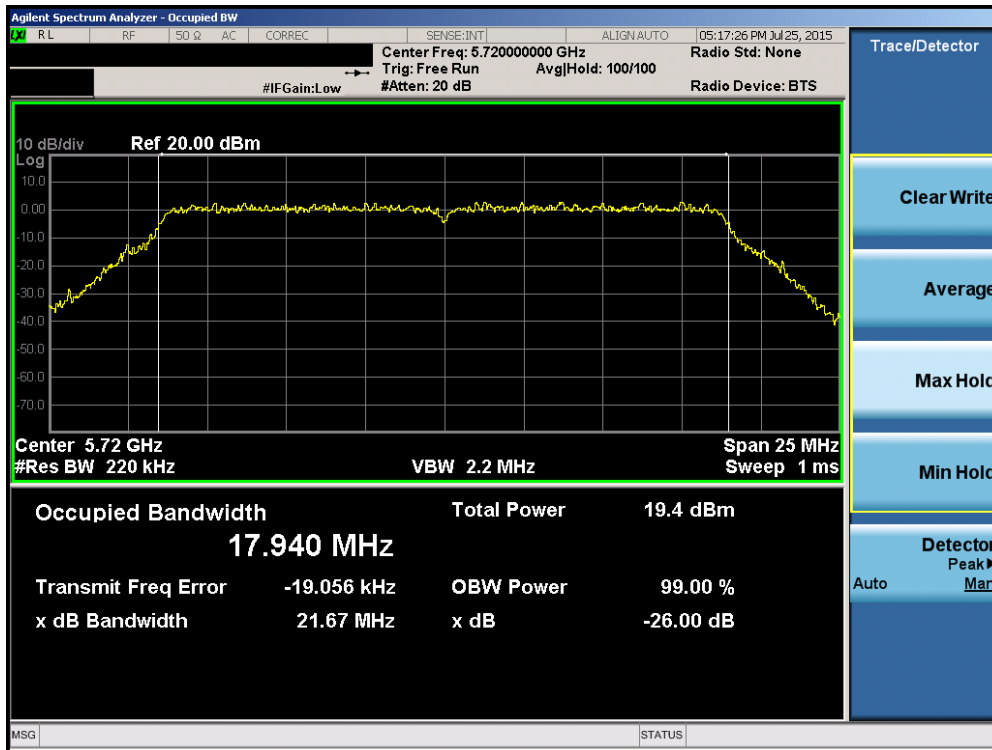


Plot 6-53. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMT817P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 41 of 208

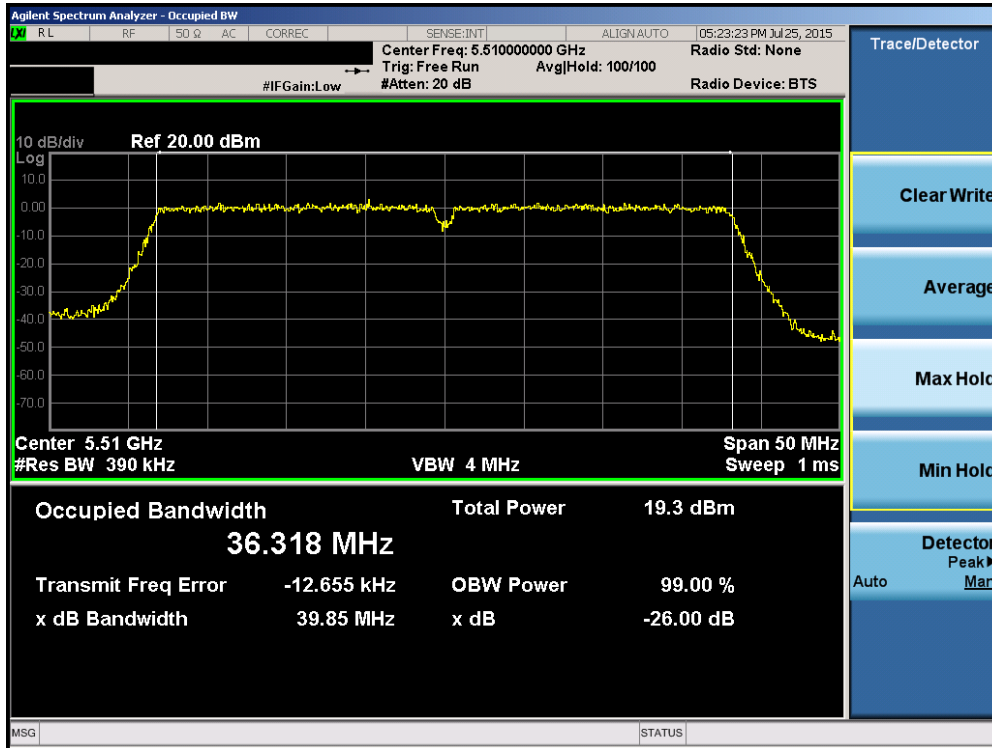


Plot 6-54. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

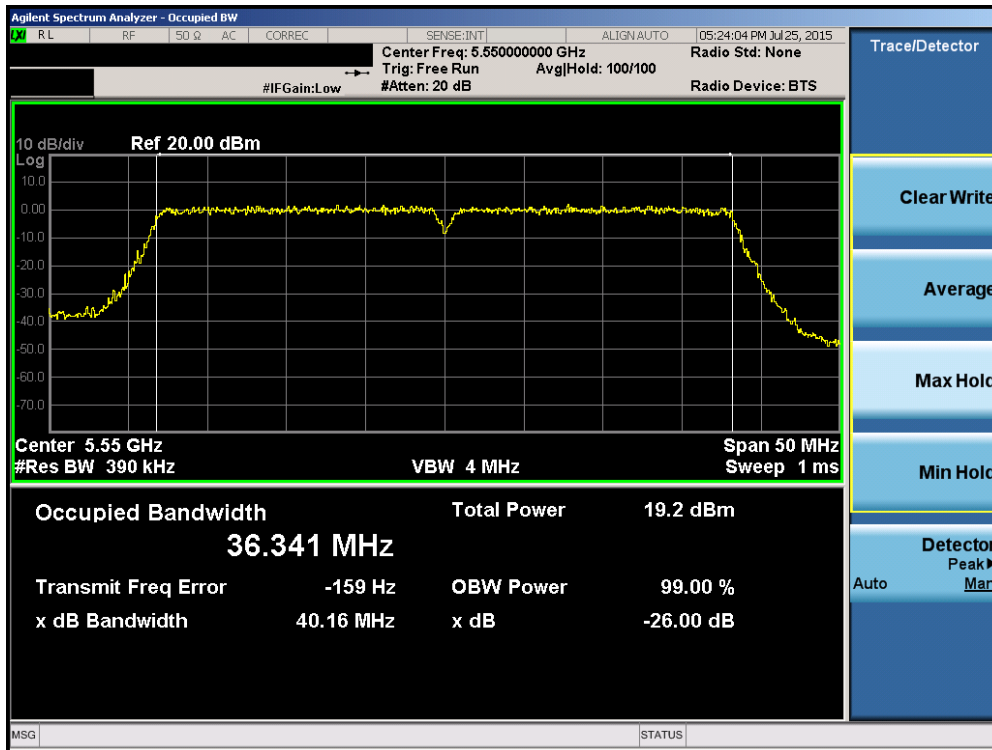


Plot 6-55. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 42 of 208

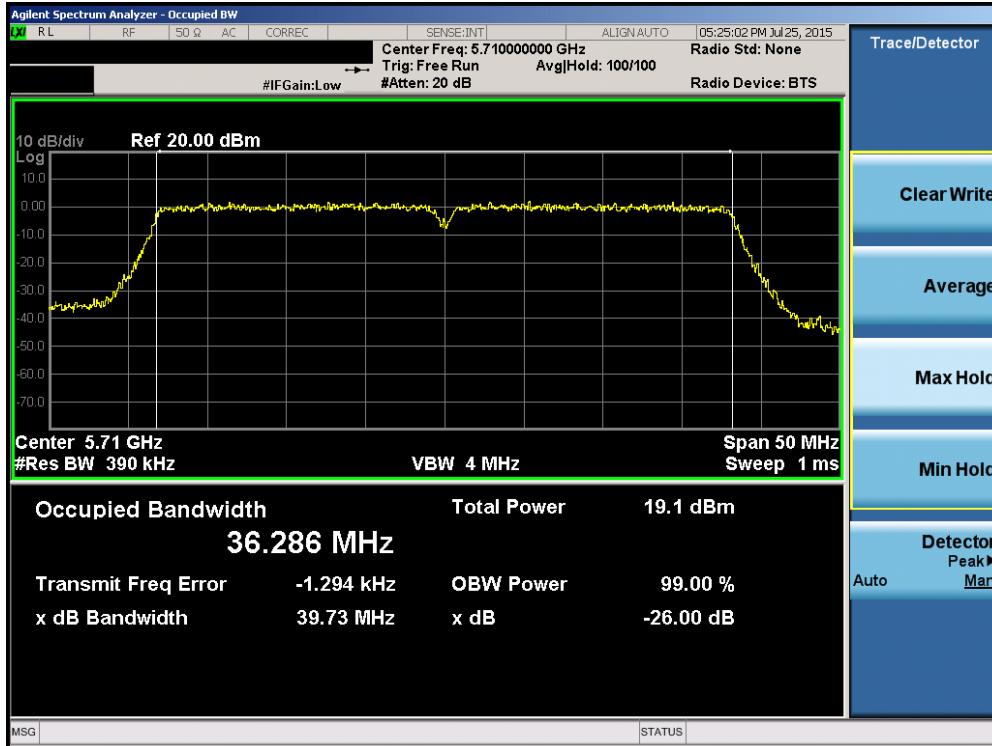


Plot 6-56. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

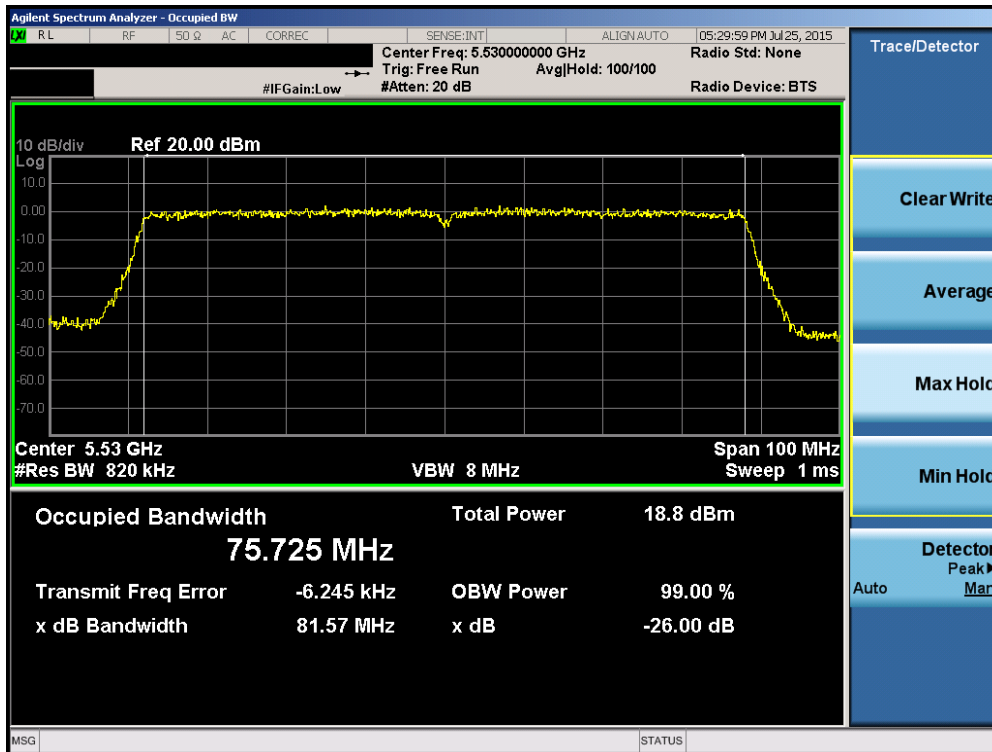

Plot 6-57. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 43 of 208

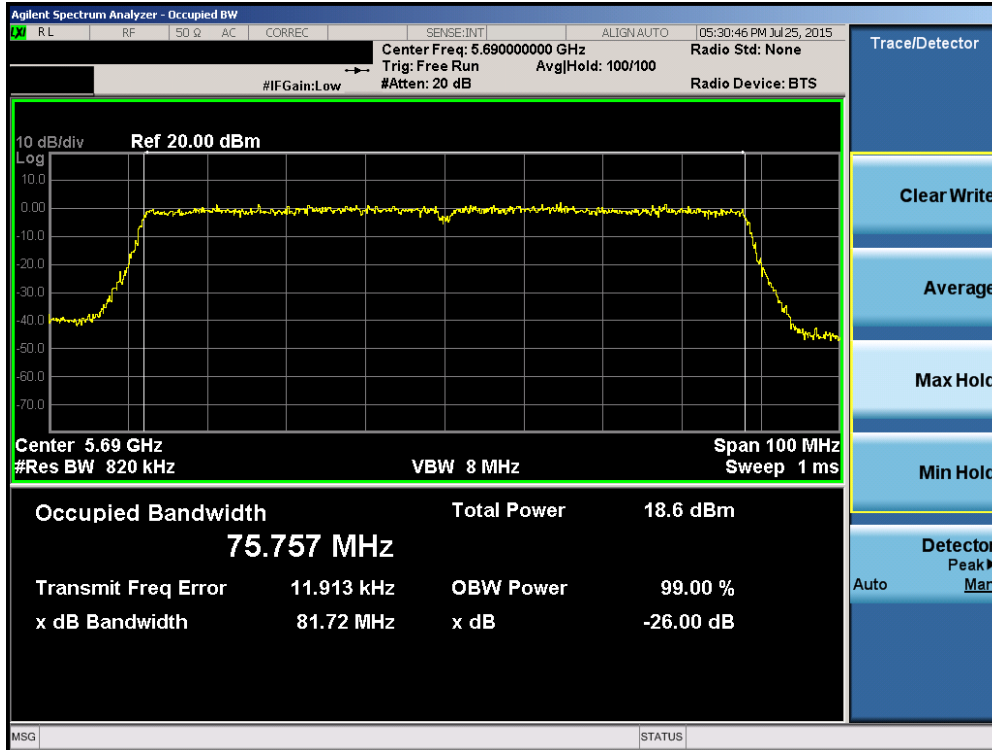

Plot 6-58. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 44 of 208

6.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be \geq 500 kHz.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 45 of 208	

Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.54
	5785	157	a	6	16.48
	5825	165	a	6	16.61
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.56
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.63
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.37
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.33
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.36

Table 6-4. Conducted Bandwidth Measurements

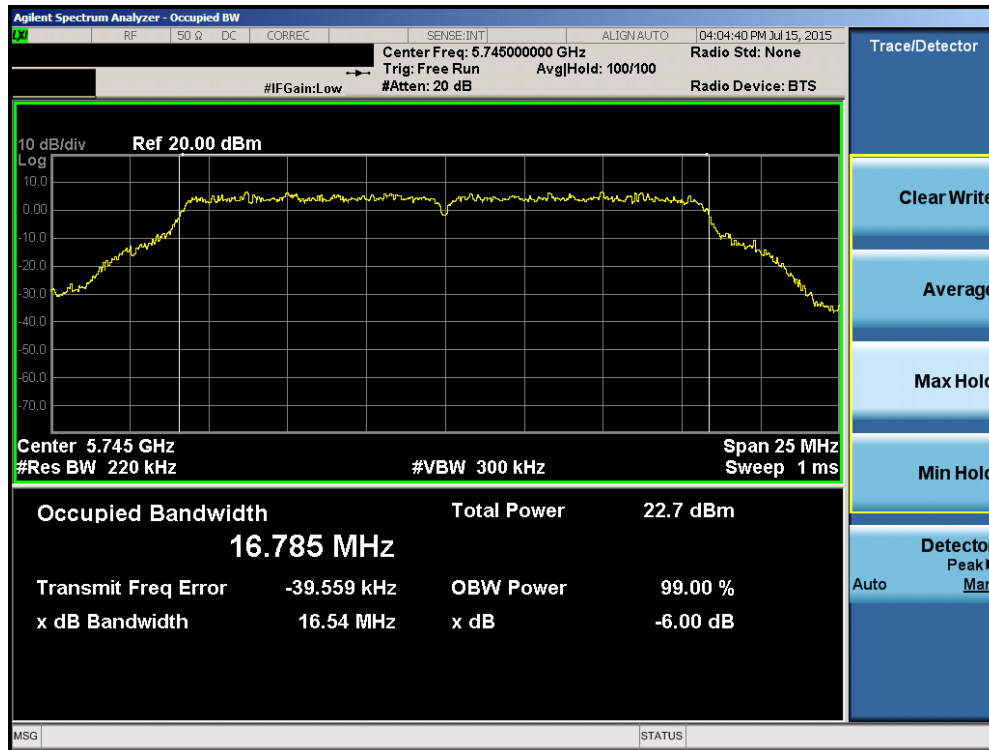


Plot 6-59. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 46 of 208

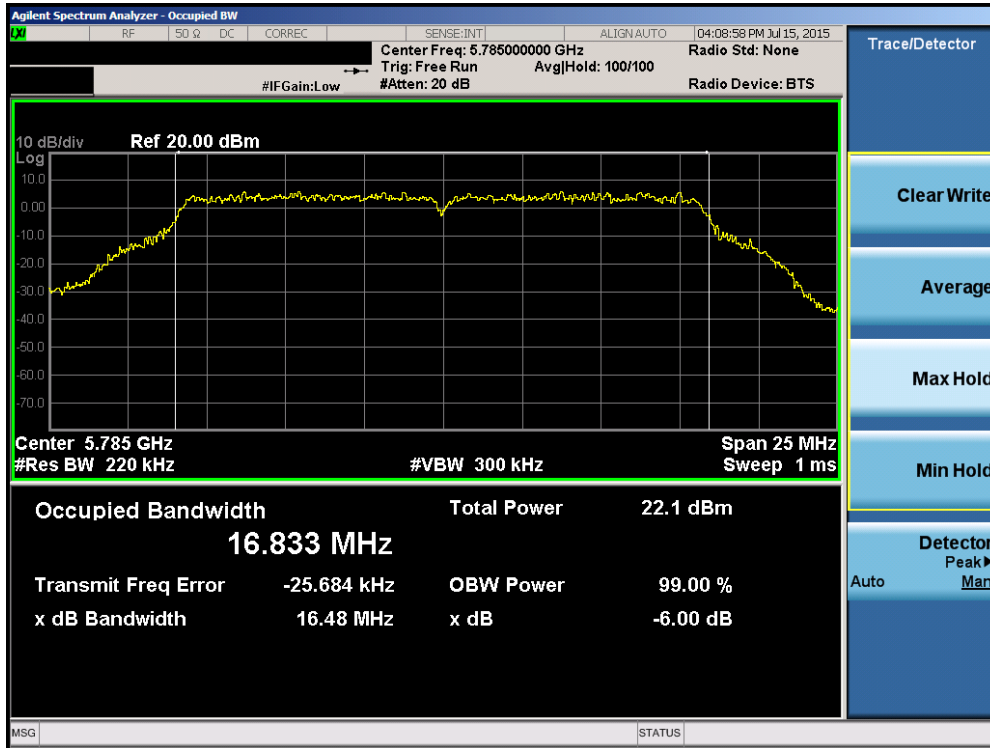


Plot 6-60. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

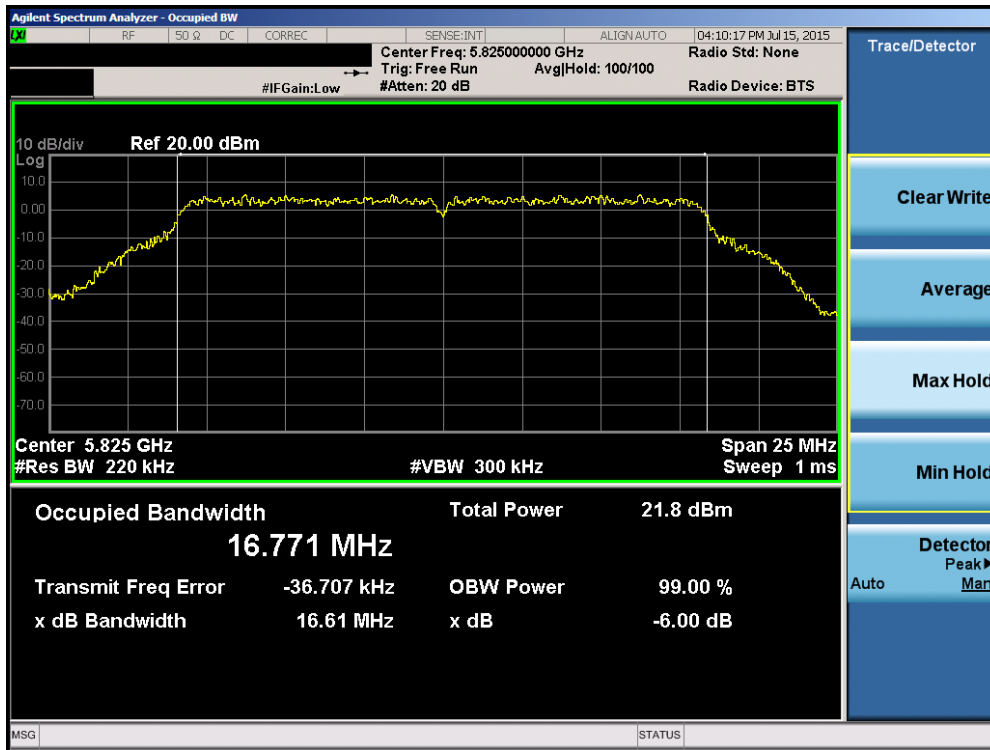


Plot 6-61. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 47 of 208

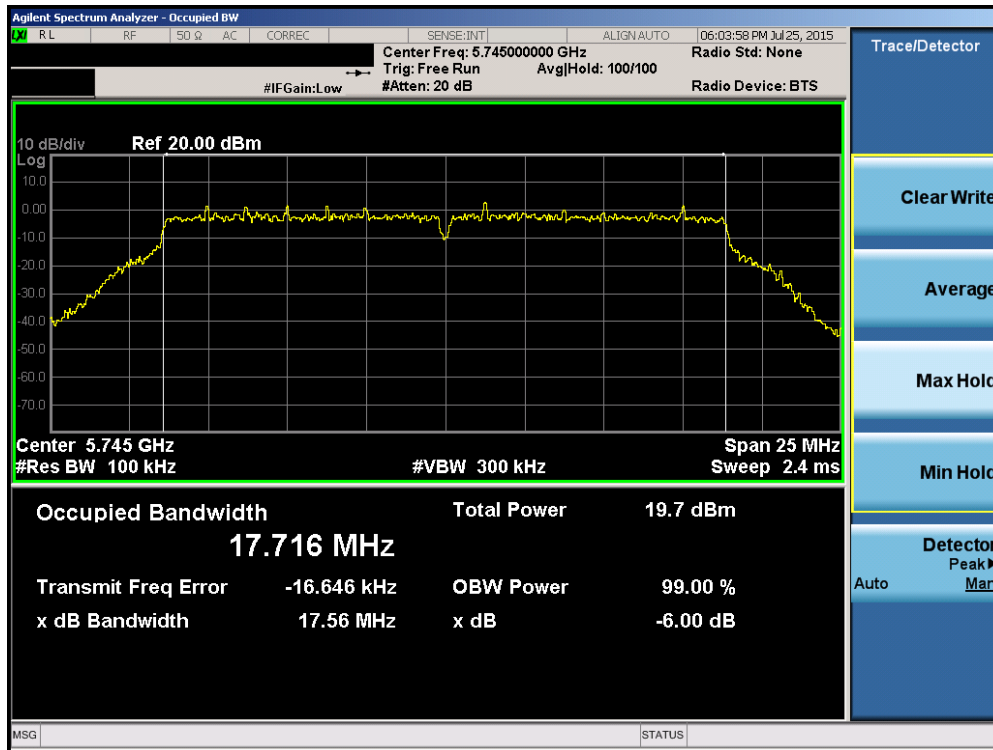


Plot 6-62. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

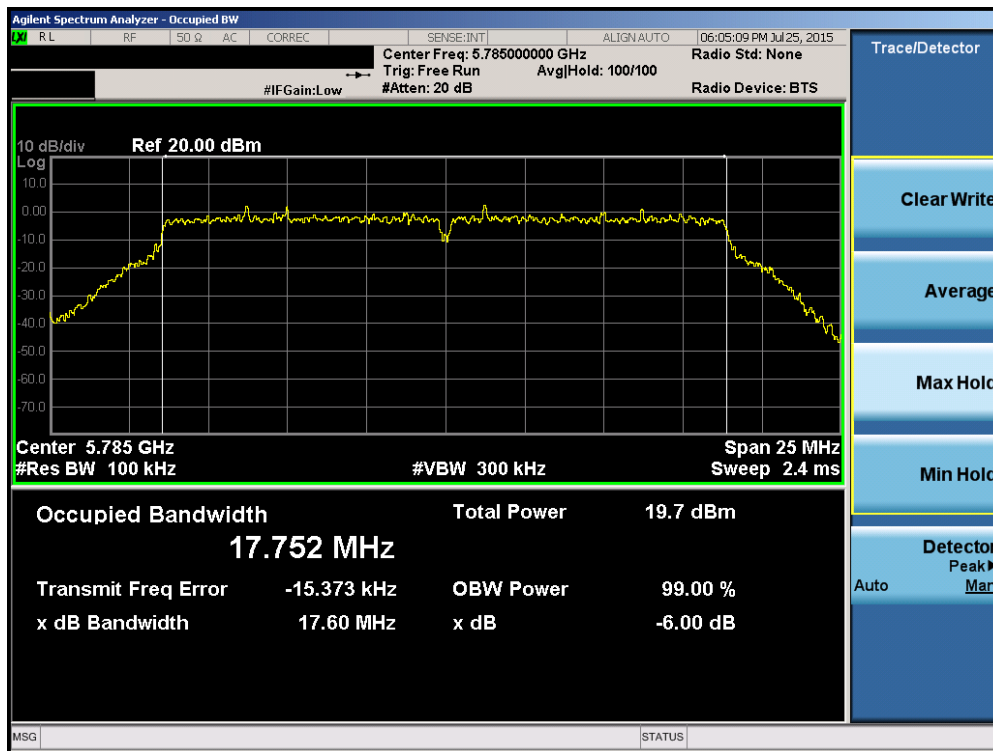


Plot 6-63. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 48 of 208

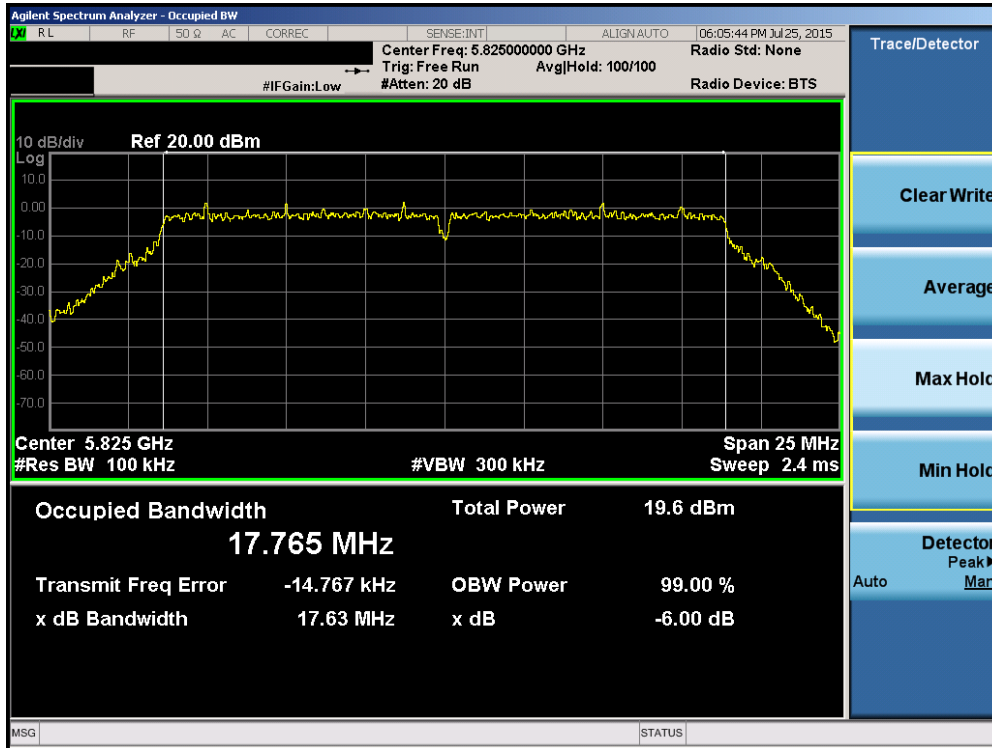


Plot 6-64. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

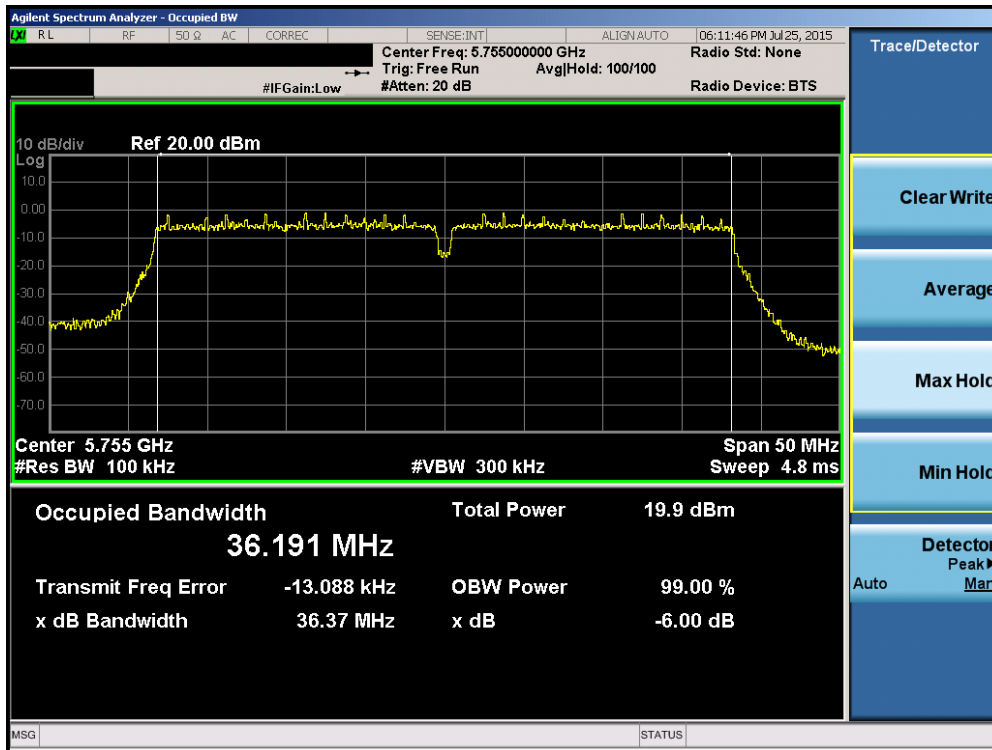


Plot 6-65. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 49 of 208

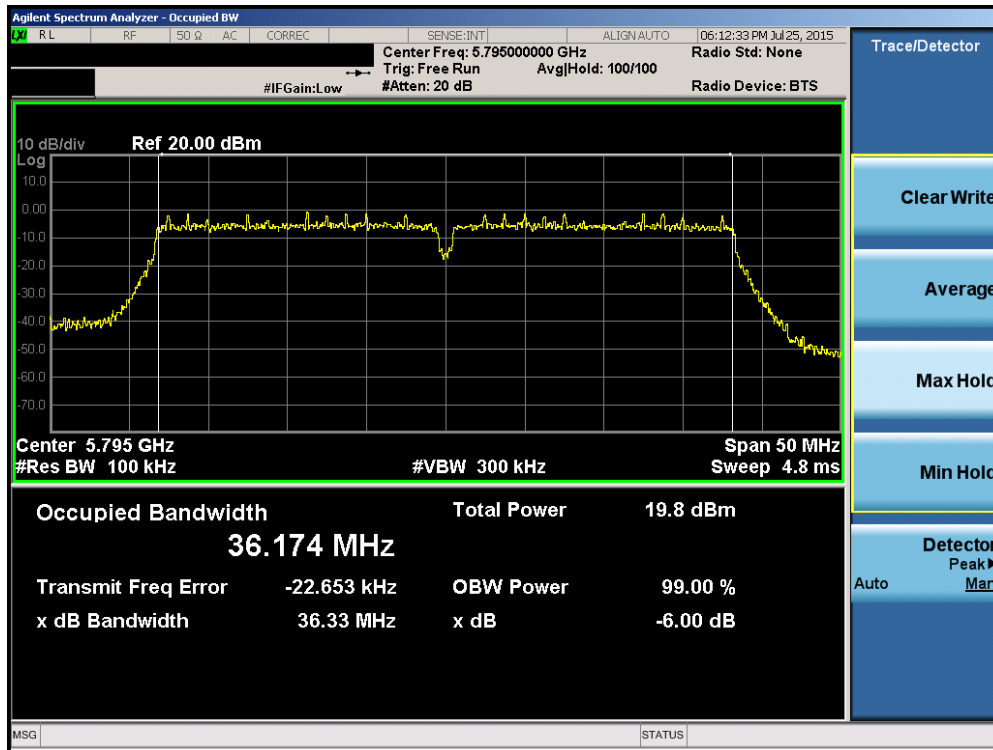

Plot 6-66. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

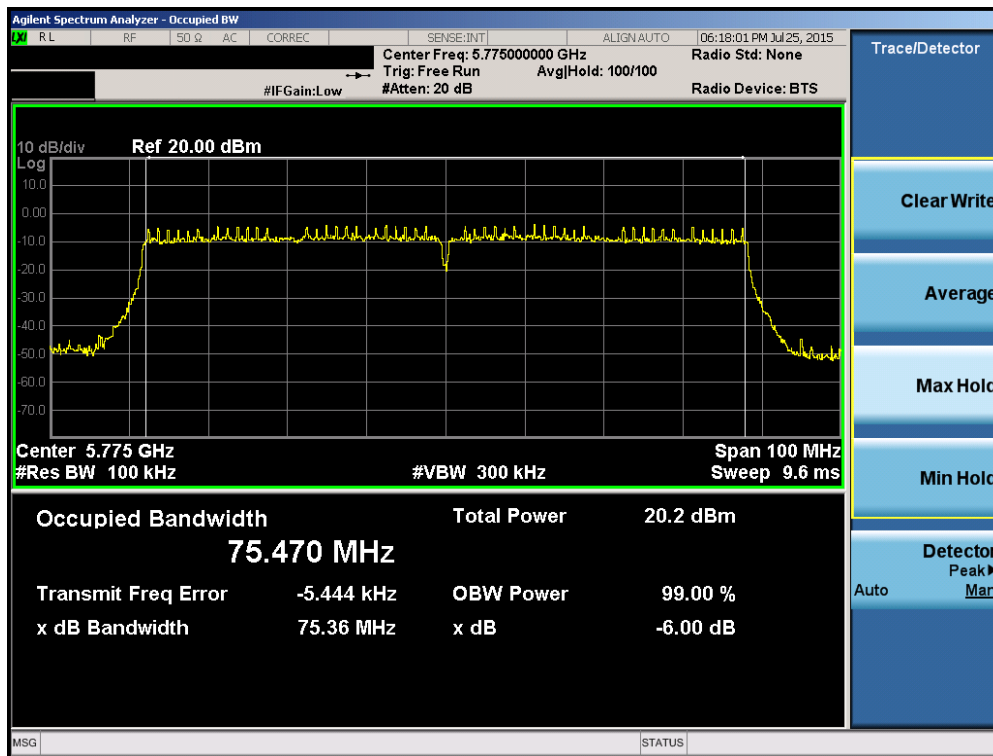


Plot 6-67. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 50 of 208

Antenna-2 6dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.45
	5785	157	a	6	16.35
	5825	165	a	6	16.40
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.64
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.59
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.36
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.36
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.79

Table 6-5. Conducted Bandwidth Measurements

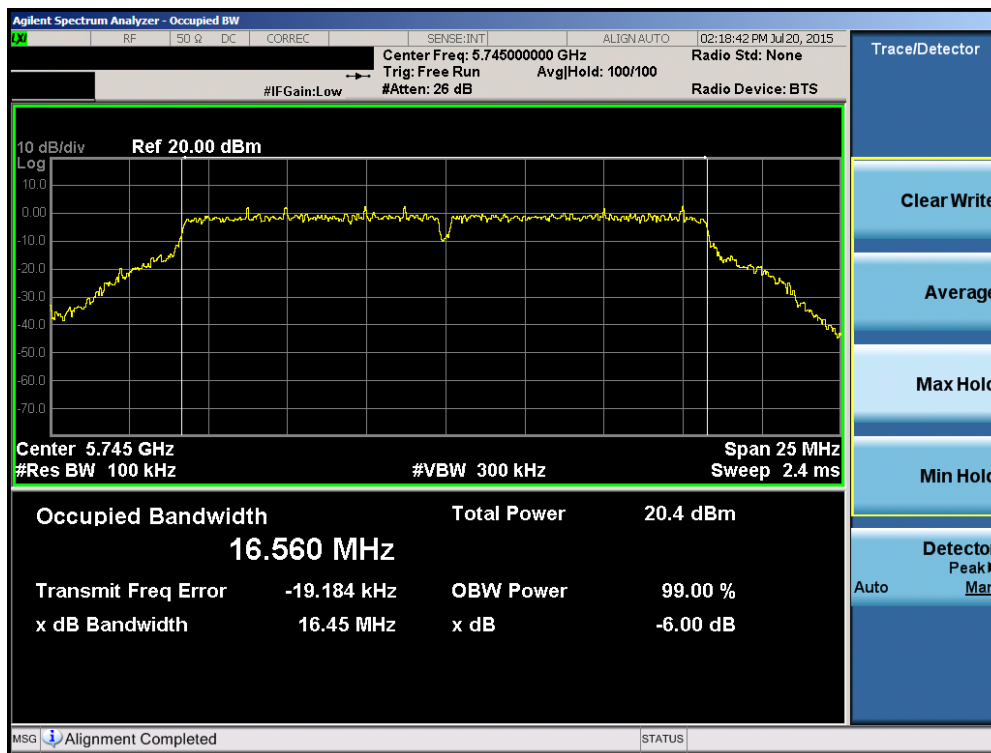


Plot 6-68. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 51 of 208

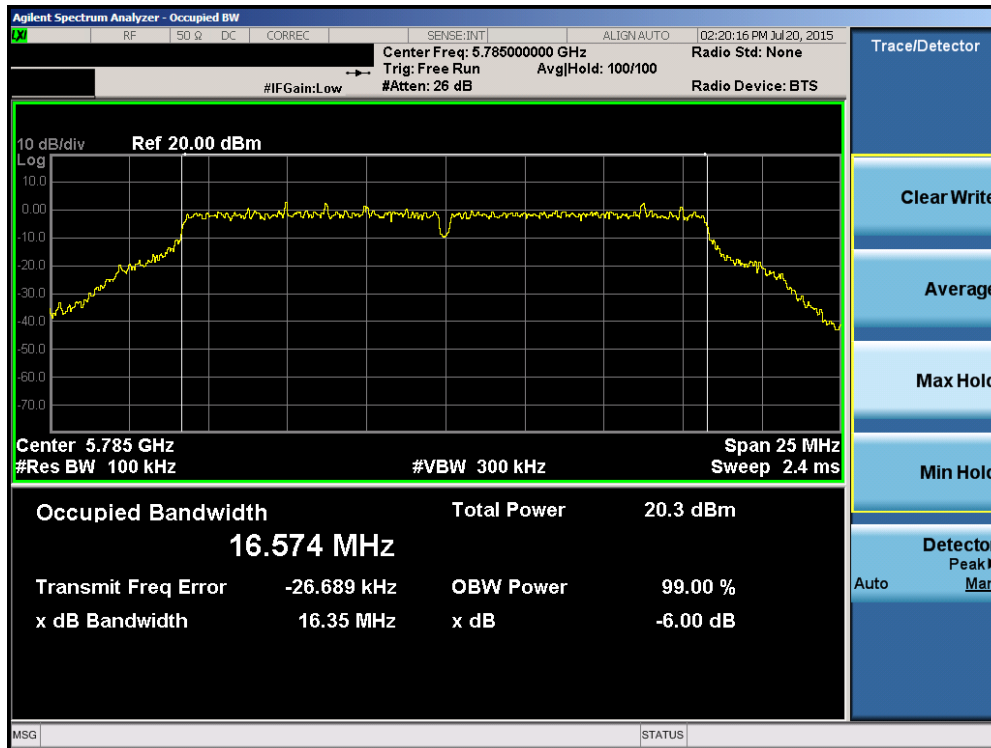


Plot 6-69. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

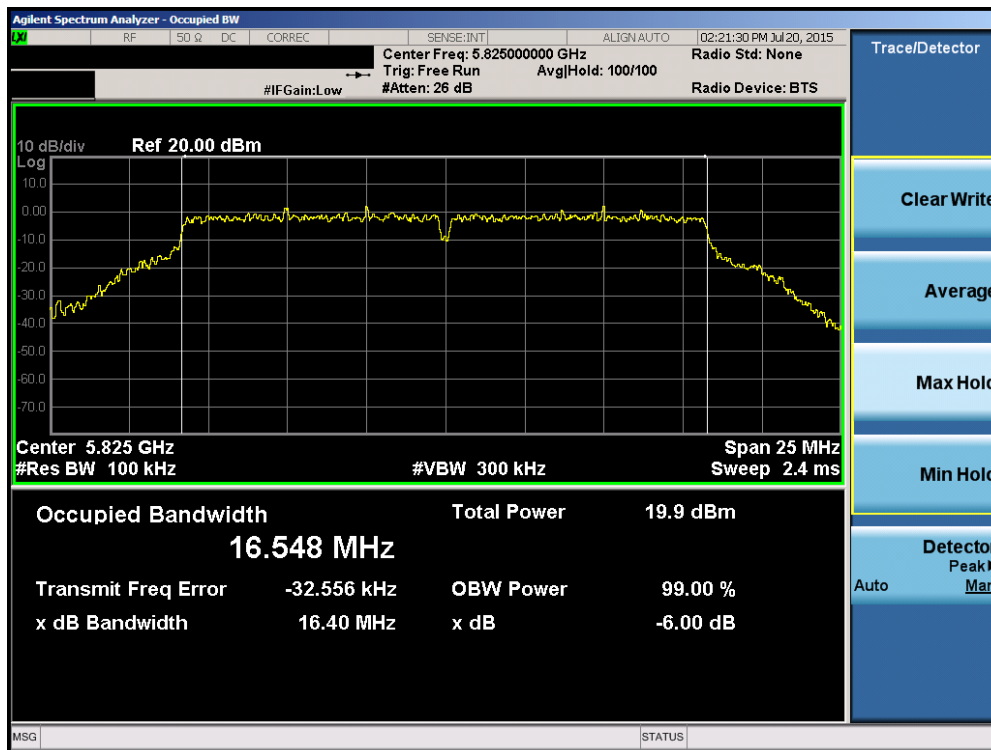


Plot 6-70. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 52 of 208

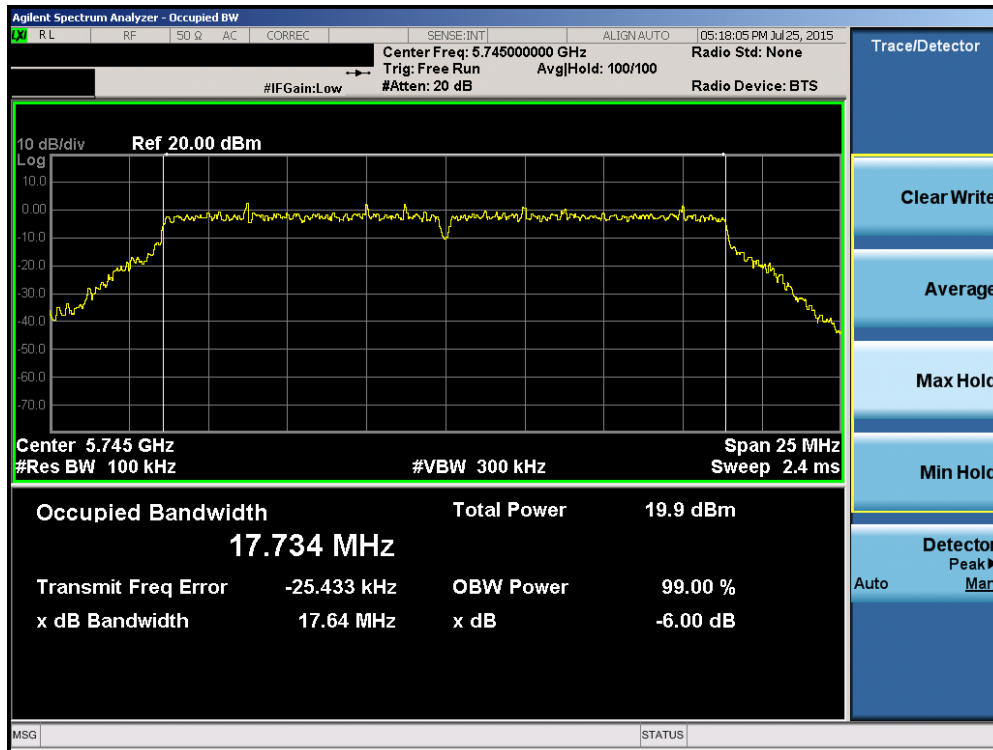


Plot 6-71. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

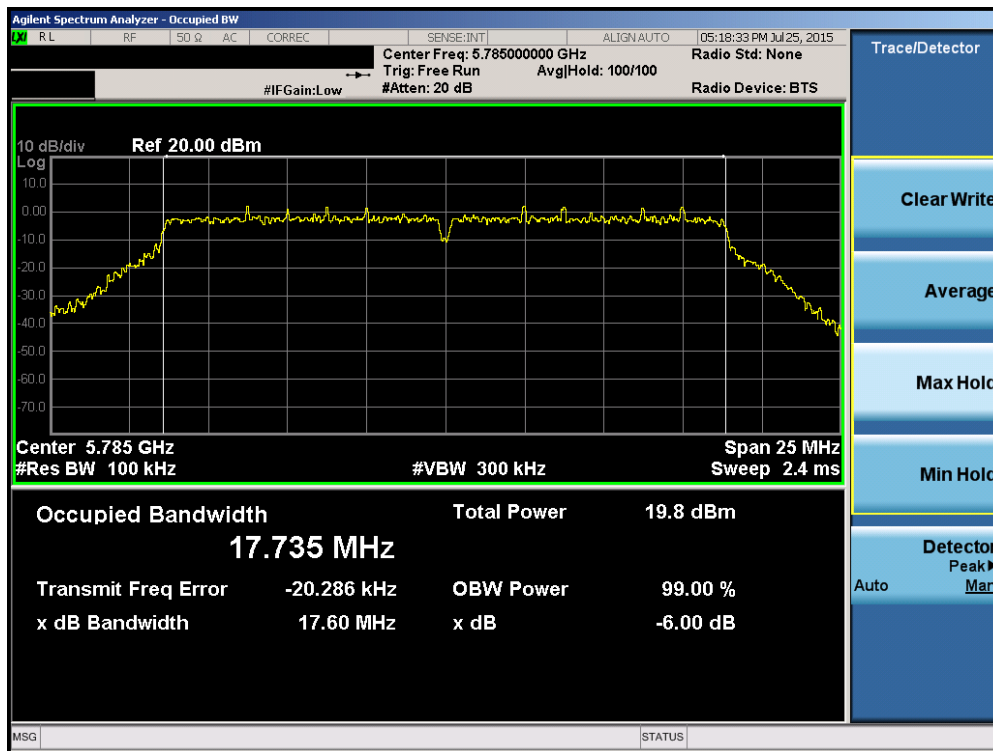


Plot 6-72. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 53 of 208

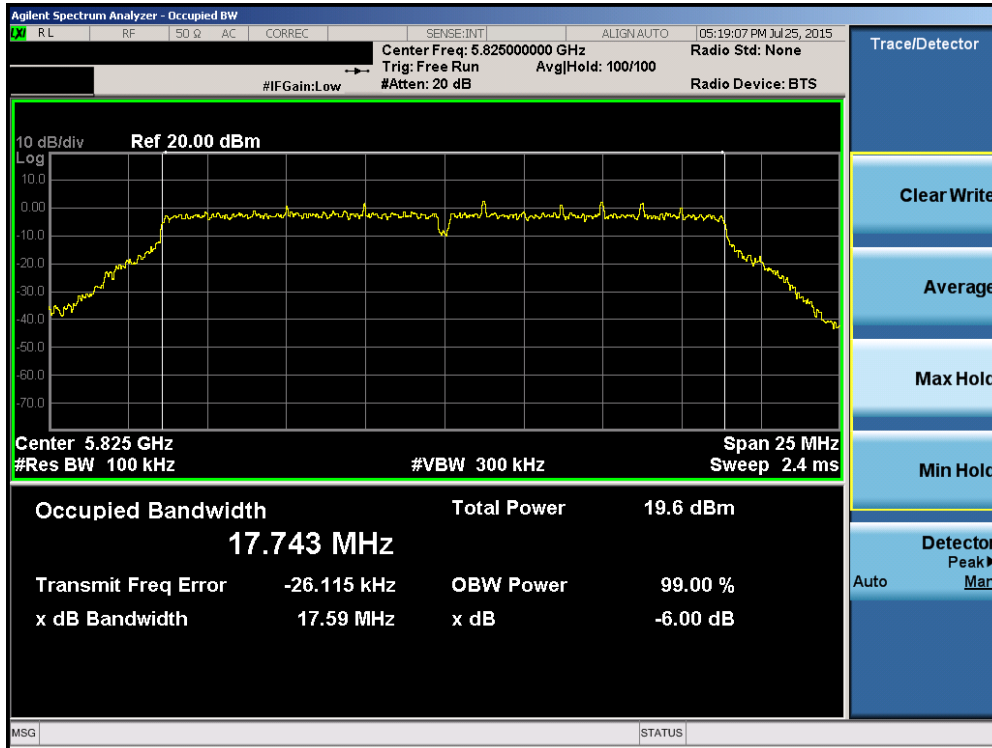


Plot 6-73. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

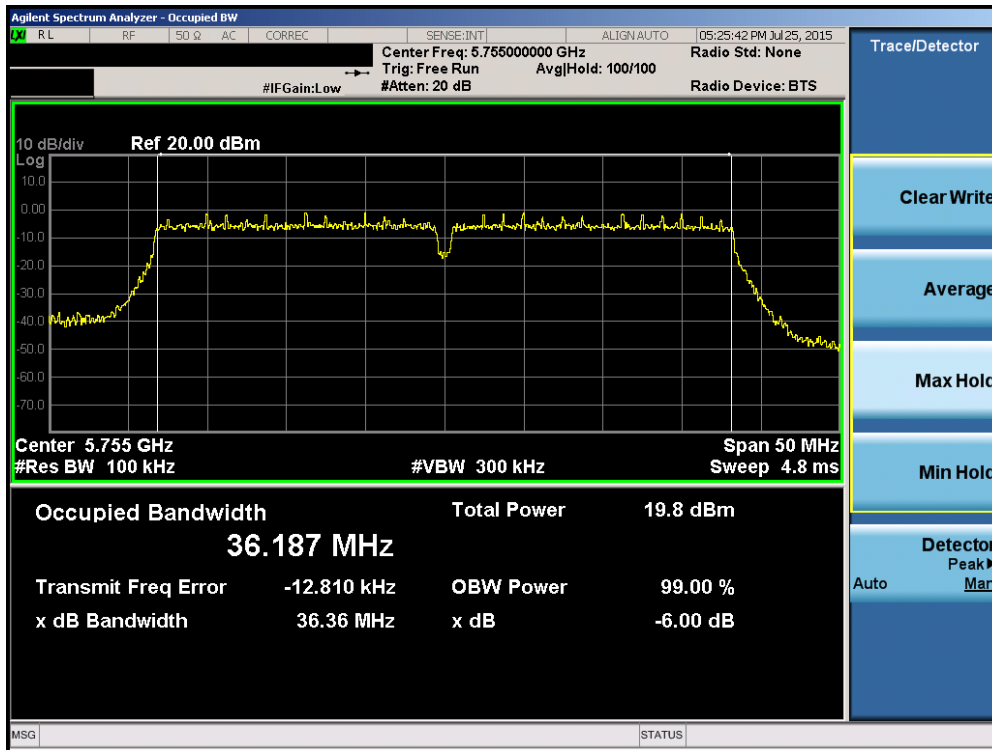


Plot 6-74. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 54 of 208

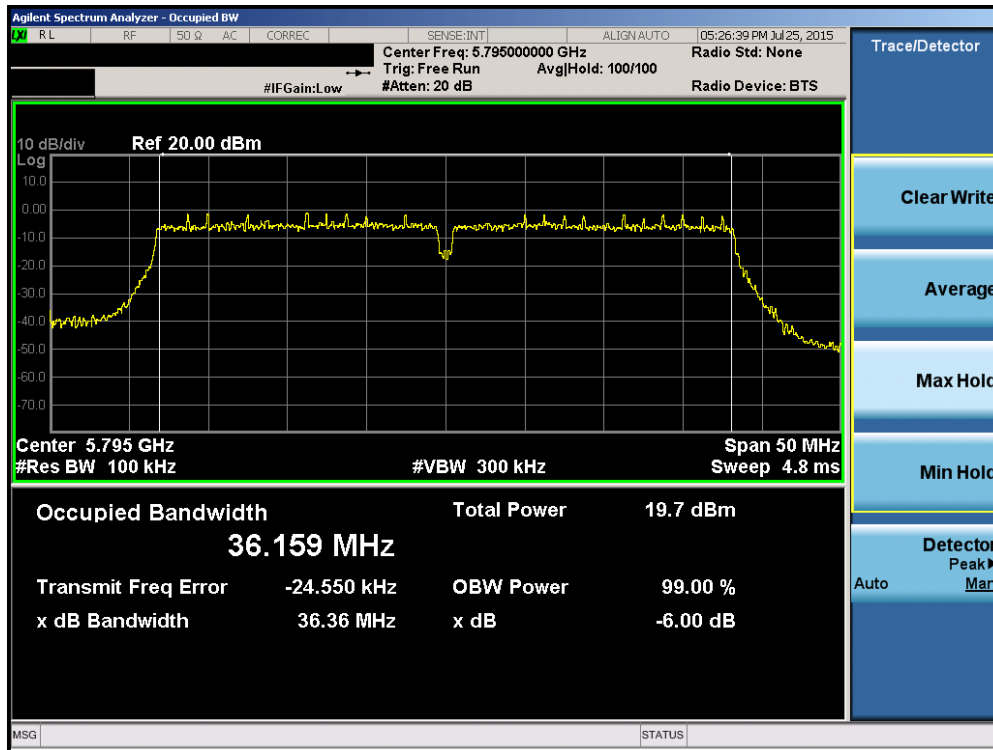

Plot 6-75. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

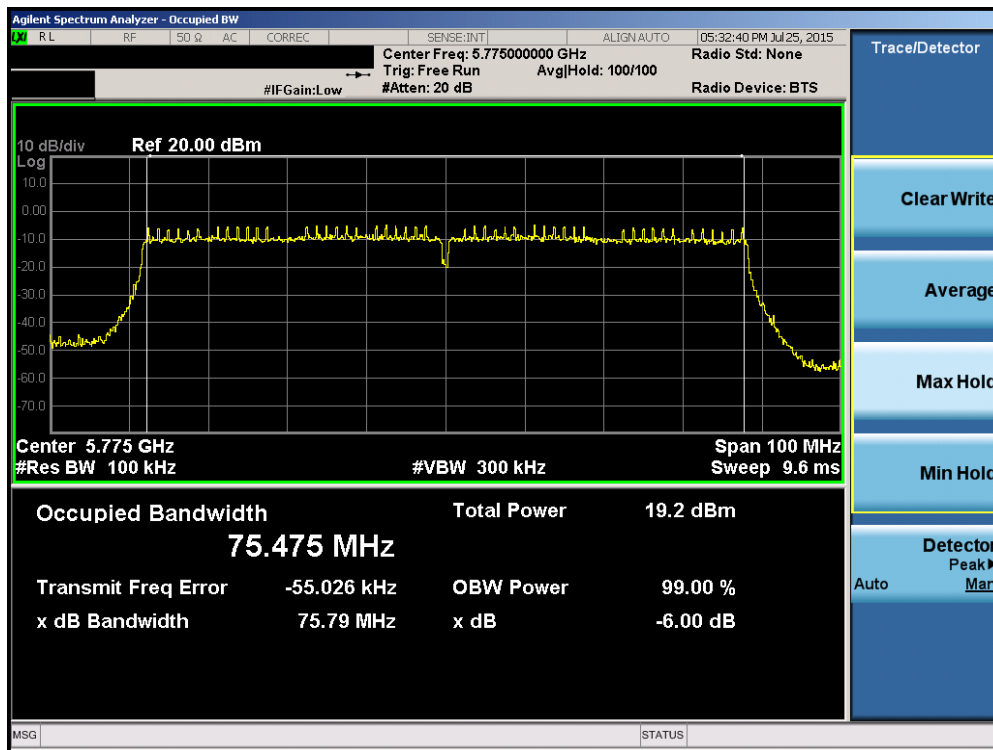

Plot 6-76. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 55 of 208

6.4 UNII Output Power Measurement – 802.11a/n/ac §15.407 (a.1)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.44) = 24.31\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.34) = 24.29\text{dBm}$.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

KDB 789033 D02 v01 – Section E)3)b) Method PM-G
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

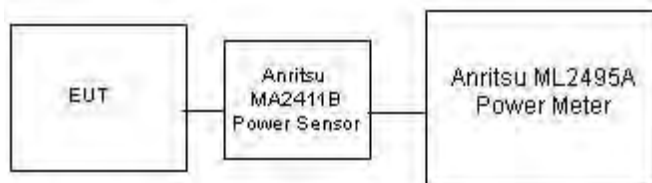




Figure 6-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet		Page 56 of 208

Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	13.15	12.75	12.81
5200	40	AVG	13.16	12.80	12.91
5220	44	AVG	13.11	12.85	12.91
5240	48	AVG	13.13	12.85	13.13
5260	52	AVG	13.12	13.10	13.26
5280	56	AVG	13.05	12.92	13.34
5300	60	AVG	13.21	13.09	13.41
5320	64	AVG	13.21	13.09	13.47
5500	100	AVG	13.32	13.16	12.91
5560	112	AVG	13.03	13.00	12.73
5580	116	AVG	13.07	13.02	12.85
5600	120	AVG	12.79	12.62	12.71
5620	124	AVG	12.91	12.63	12.84
5640	128	AVG	12.75	12.39	12.78
5660	132	AVG	12.70	12.85	12.68
5700	140	AVG	12.55	12.58	12.74
5720	144	AVG	12.39	12.48	12.42
5745	149	AVG	13.00	12.89	13.26
5785	157	AVG	12.77	12.85	13.05
5825	165	AVG	12.33	12.60	13.14



Table 6-6. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	11.22	11.33
5230	46	AVG	11.32	11.76
5270	54	AVG	11.57	11.89
5310	62	AVG	11.97	12.15
5510	102	AVG	12.29	12.34
5550	110	AVG	12.30	12.47
5590	118	AVG	12.33	12.41
5630	126	AVG	12.02	12.32
5670	134	AVG	12.24	12.33
5710	142	AVG	11.96	12.24
5755	151	AVG	12.27	12.40
5795	159	AVG	12.30	12.33

Table 6-7. 40MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (80MHz) Conducted Power [dBm]
			IEEE Transmission Mode
			802.11ac
5210	42	AVG	11.18
5290	58	AVG	11.12
5530	106	AVG	11.35
5610	122	AVG	11.24
5690	138	AVG	10.84
5775	155	AVG	11.09

Table 6-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 57 of 208	

Antenna-2 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	13.46	13.40	13.45
5200	40	AVG	13.43	13.37	13.43
5220	44	AVG	13.38	13.34	13.45
5240	48	AVG	13.47	13.42	13.27
5260	52	AVG	13.19	13.30	13.41
5280	56	AVG	13.29	13.39	13.19
5300	60	AVG	13.22	13.27	13.28
5320	64	AVG	13.07	13.25	13.27
5500	100	AVG	13.05	13.14	13.27
5560	112	AVG	13.04	13.19	13.04
5580	116	AVG	12.97	13.05	13.16
5600	120	AVG	13.06	13.10	13.01
5620	124	AVG	12.94	13.09	12.91
5640	128	AVG	12.88	13.09	13.09
5660	132	AVG	12.92	12.94	12.90
5700	140	AVG	12.84	12.95	12.94
5720	144	AVG	12.75	12.79	12.73
5745	149	AVG	13.08	13.07	12.99
5785	157	AVG	12.95	12.81	12.77
5825	165	AVG	12.60	12.82	12.70



Table 6-9. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	11.76	11.64
5230	46	AVG	11.78	11.52
5270	54	AVG	11.66	11.47
5310	62	AVG	11.60	11.43
5510	102	AVG	12.31	12.25
5550	110	AVG	12.44	12.19
5590	118	AVG	12.37	12.26
5630	126	AVG	12.48	12.31
5670	134	AVG	12.41	12.01
5710	142	AVG	12.43	12.16
5755	151	AVG	12.44	12.30
5795	159	AVG	12.37	12.02

Table 6-10. 40MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (80MHz) Conducted Power [dBm]
			IEEE Transmission Mode
			802.11ac
5210	42	AVG	11.19
5290	58	AVG	11.07
5530	106	AVG	10.92
5610	122	AVG	10.8
5690	138	AVG	10.64
5775	155	AVG	10.72

Table 6-11. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 58 of 208	



MIMO Maximum Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			ANT1	ANT2	MIMO
5180	36	AVG	12.75	13.40	16.10
5200	40	AVG	12.80	13.37	16.10
5220	44	AVG	12.85	13.34	16.11
5240	48	AVG	12.85	13.42	16.15
5260	52	AVG	13.10	13.30	16.21
5280	56	AVG	12.92	13.39	16.17
5300	60	AVG	13.09	13.27	16.19
5320	64	AVG	13.09	13.25	16.18
5500	100	AVG	13.16	13.14	16.16
5560	112	AVG	13.00	13.19	16.11
5580	116	AVG	13.02	13.05	16.05
5640	128	AVG	12.39	13.09	15.76
5660	132	AVG	12.85	12.94	15.91
5700	140	AVG	12.58	12.95	15.78
5720	144	AVG	12.48	12.79	15.65
5745	149	AVG	12.89	13.07	15.99
5785	157	AVG	12.85	12.81	15.84
5825	165	AVG	12.60	12.82	15.72

Table 6-12. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			ANT1	ANT2	MIMO
5180	36	AVG	12.81	13.45	16.15
5200	40	AVG	12.91	13.43	16.19
5220	44	AVG	12.91	13.45	16.20
5240	48	AVG	13.13	13.27	16.21
5260	52	AVG	13.26	13.41	16.35
5280	56	AVG	13.34	13.19	16.28
5300	60	AVG	13.41	13.28	16.36
5320	64	AVG	13.47	13.27	16.38
5500	100	AVG	12.91	13.27	16.10
5560	112	AVG	12.73	13.04	15.90
5580	116	AVG	12.85	13.16	16.02
5640	128	AVG	12.78	13.09	15.95
5660	132	AVG	12.68	12.90	15.80
5700	140	AVG	12.74	12.94	15.85
5720	144	AVG	12.42	12.73	15.59
5745	149	AVG	13.26	12.99	16.14
5785	157	AVG	13.05	12.77	15.92
5825	165	AVG	13.14	12.70	15.94

Table 6-13. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 59 of 208	

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
			ANT1	ANT2	MIMO
5190	38	AVG	11.22	11.76	14.51
5230	46	AVG	11.32	11.78	14.57
5270	54	AVG	11.57	11.66	14.63
5310	62	AVG	11.97	11.60	14.80
5510	102	AVG	12.29	12.31	15.31
5550	110	AVG	12.30	12.44	15.38
5590	118	AVG	12.33	12.37	15.36
5630	126	AVG	12.02	12.48	15.27
5670	134	AVG	12.24	12.41	15.34
5710	142	AVG	11.96	12.43	15.21
5755	151	AVG	12.27	12.44	15.37
5795	159	AVG	12.30	12.37	15.35

Table 6-14. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
			ANT1	ANT2	MIMO
5190	38	AVG	11.33	11.64	14.50
5230	46	AVG	11.76	11.52	14.65
5270	54	AVG	11.89	11.47	14.70
5310	62	AVG	12.15	11.43	14.82
5510	102	AVG	12.34	12.25	15.31
5550	110	AVG	12.47	12.19	15.34
5590	118	AVG	12.41	12.26	15.35
5630	126	AVG	12.32	12.31	15.33
5670	134	AVG	12.33	12.01	15.18
5710	142	AVG	12.24	12.16	15.21
5755	151	AVG	12.40	12.30	15.36
5795	159	AVG	12.33	12.02	15.19

Table 6-15. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	5GHz (80MHz) Conducted Power [dBm]		
		ANT1	ANT2	MIMO
5210	42	11.18	11.19	14.20
5290	58	11.12	11.07	14.11
5530	106	11.35	10.92	14.15
5610	122	11.24	10.8	14.04
5690	138	10.84	10.64	13.75
5775	155	11.09	10.72	13.92

Table 6-16. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Note:



Per KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz the average conducted output power was measured to be 12.75 dBm for Antenna-1 and 13.40 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(12.75 \text{ dBm} + 13.40 \text{ dBm}) = (18.84 \text{ mW} + 21.88 \text{ mW}) = 40.71 \text{ mW} = 16.10 \text{ dBm}$$

FCC ID: A3LSMT817P		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1507071385.A3L	Test Dates: 7/7 - 7/29/2015	EUT Type: Portable Tablet	Page 60 of 208	