

## 10.3 OUT OF BAND EMISSIONS

### RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §27. 53

### LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than  $43 + 10 \log (P)$  dB at the channel edge and  $(55 + 10 \log (P))$ dB at the 5.5 MHz from the channel edges.

### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100KHz for emission below 1GHz and 1MHz for emissions above 1GHz (Tests were performed 1MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = peak;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = max hold;

### RESULTS

**GSM**

Band	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]
GSM850	GPRS	824.2	-24.22	-13.00
		836.6	-24.44	
		848.8	-24.51	
	EGPRS	824.2	-24.33	
		836.6	-23.78	
		848.8	-24.71	
GSM1900	GPRS	1850.2	-22.09	
		1880.0	-21.75	
		1909.8	-22.18	
	EGPRS	1850.2	-21.58	
		1880.0	-21.97	
		1909.8	-21.66	

**WCDMA**

Band	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]
Band 5	REL99	826.4	-32.65	-13.00
		836.6	-32.41	
		846.6	-32.86	
	HSDPA	826.4	-33.24	
		836.6	-32.62	
		846.6	-33.41	
Band 2	REL99	1852.4	-32.12	
		1880.0	-31.31	
		1907.6	-32.05	
	HSDPA	1852.4	-31.72	
		1880.0	-32.02	
		1907.6	-32.12	

**LTE 5**


Bandwidth	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]
10 MHz	QPSK	829.0	-27.34	-13.00
		836.5	-26.25	
		844.0	-26.19	
	16QAM	829.0	-25.99	
		836.5	-26.59	
		844.0	-26.46	
5 MHz	QPSK	826.5	-26.33	
		836.5	-26.40	
		846.5	-26.82	
	16QAM	826.5	-26.72	
		836.5	-26.51	
		846.5	-26.72	
3 MHz	QPSK	825.5	-26.77	
		836.5	-26.46	
		847.5	-26.28	
	16QAM	825.5	-27.54	
		836.5	-27.23	
		847.5	-26.80	
1.4 MHz	QPSK	824.7	-26.70	
		836.5	-26.35	
		848.3	-26.60	
	16QAM	824.7	-26.52	
		836.5	-27.29	
		848.3	-26.65	

**LTE 41**


Bandwidth	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]
20 MHz	QPSK	2565.0	-29.03	-25.00
		2605.0	-29.24	
		2645.0	-29.81	
	16QAM	2565.0	-29.68	
		2605.0	-27.72	
		2645.0	-28.84	
15 MHz	QPSK	2562.5	-28.91	
		2605.0	-29.26	
		2647.5	-29.50	
	16QAM	2562.5	-29.47	
		2605.0	-29.42	
		2647.5	-29.33	
10 MHz	QPSK	2560.0	-29.59	
		2605.0	-29.02	
		2650.0	-29.31	
	16QAM	2560.0	-28.91	
		2605.0	-29.19	
		2650.0	-28.73	
5 MHz	QPSK	2557.5	-29.03	
		2605.0	-29.47	
		2652.5	-29.67	
	16QAM	2557.5	-28.58	
		2605.0	-29.77	
		2652.5	-29.13	

### 10.3.1. OUT OF BAND EMISSIONS PLOTS


#### GSM 850

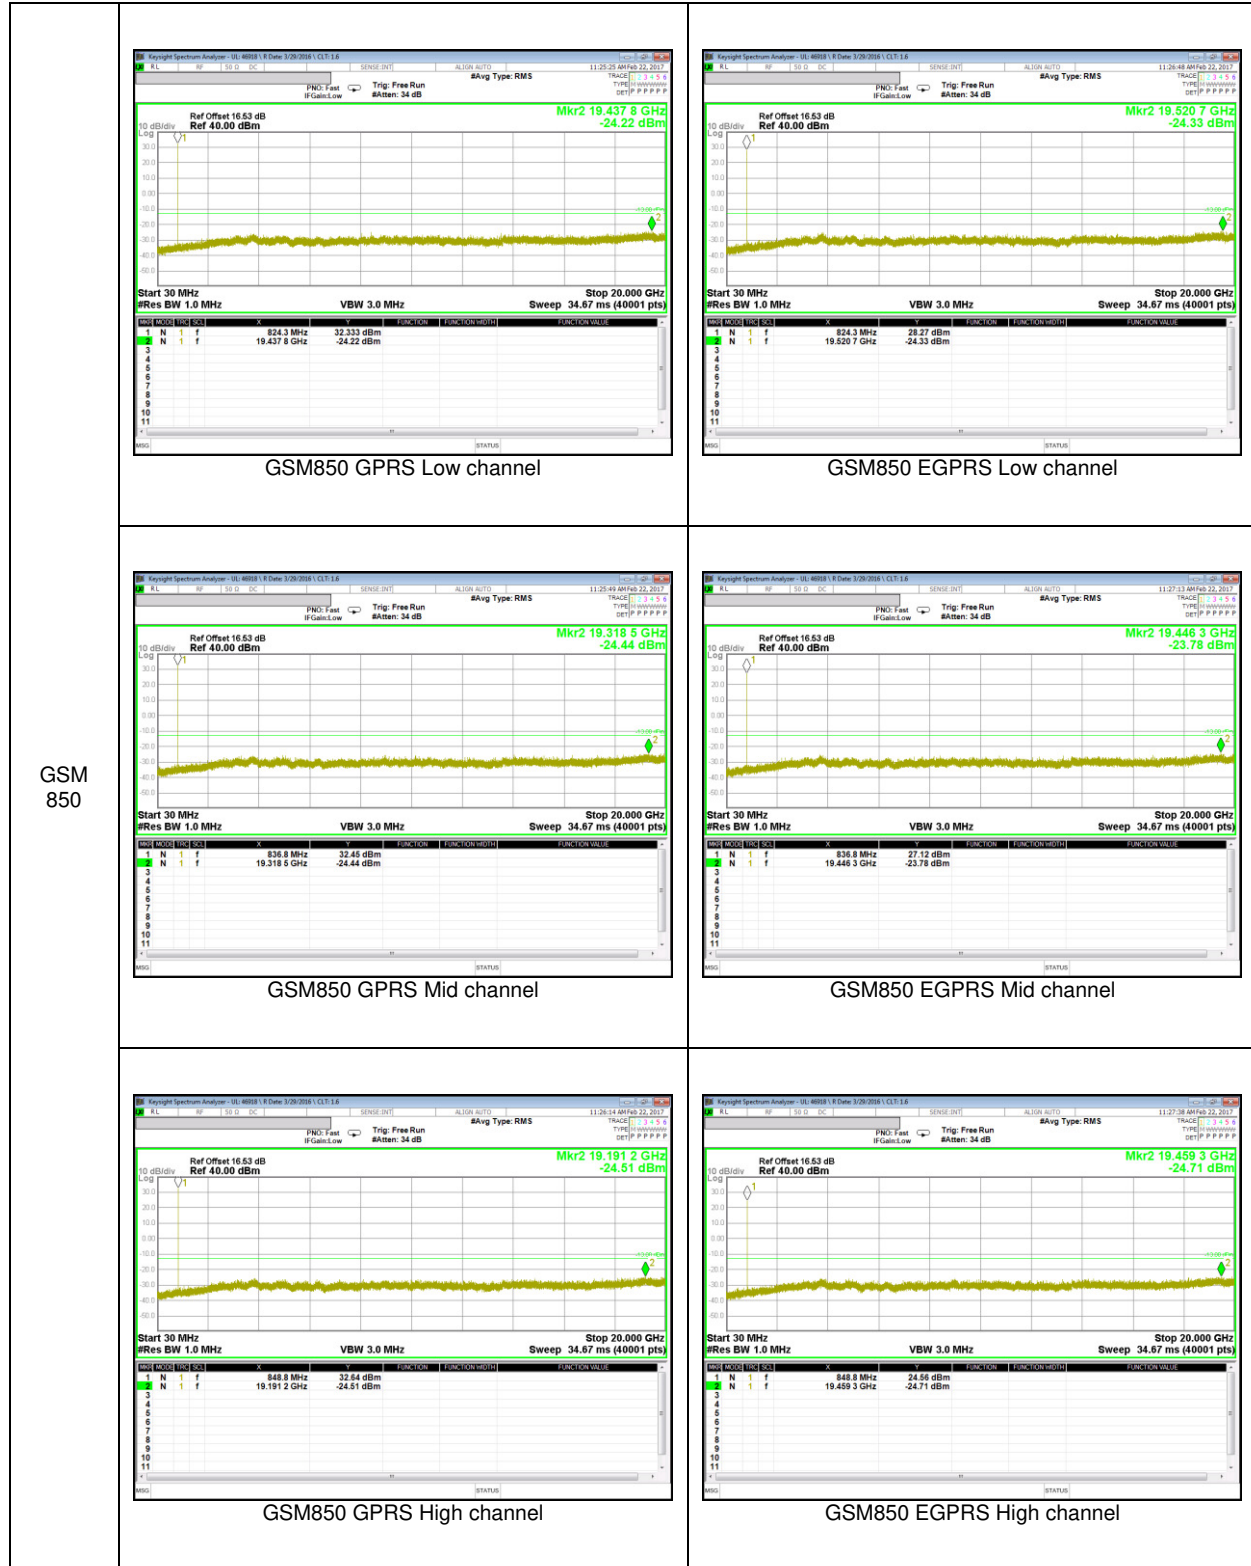


**GSM 1900**

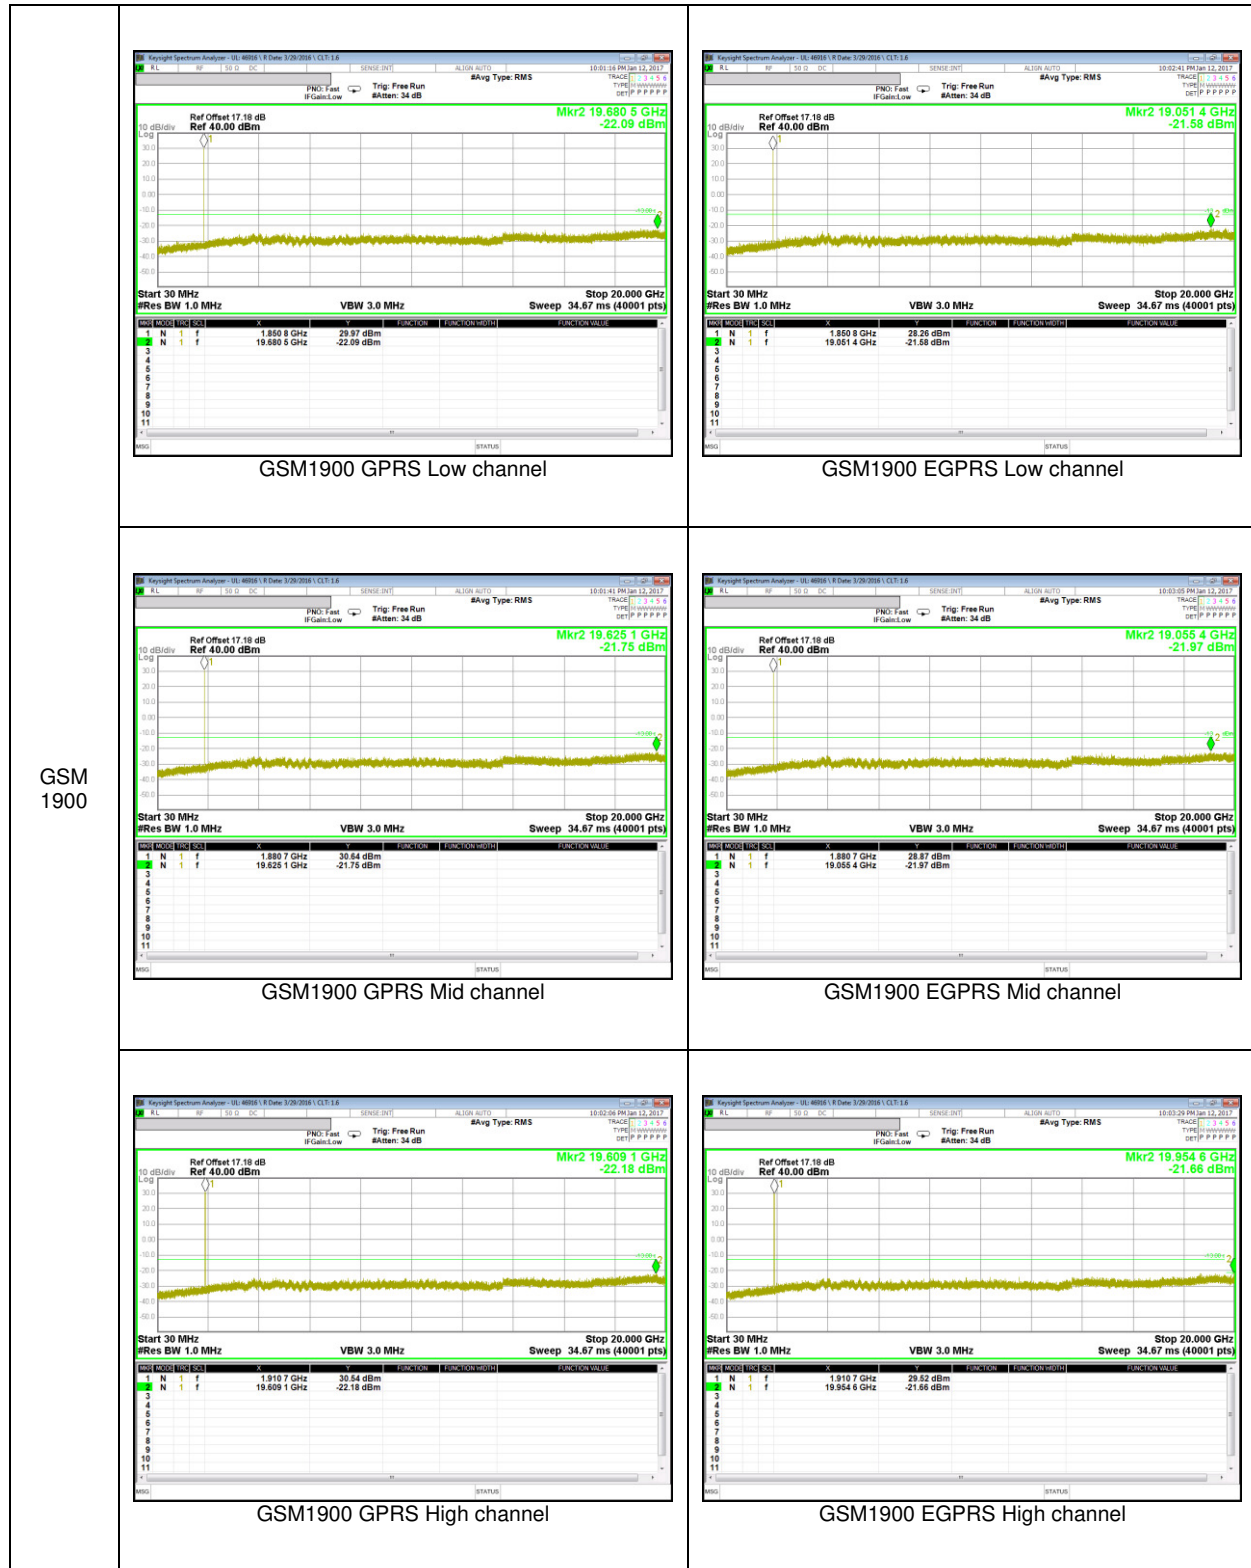

**WCDMA Band 5**

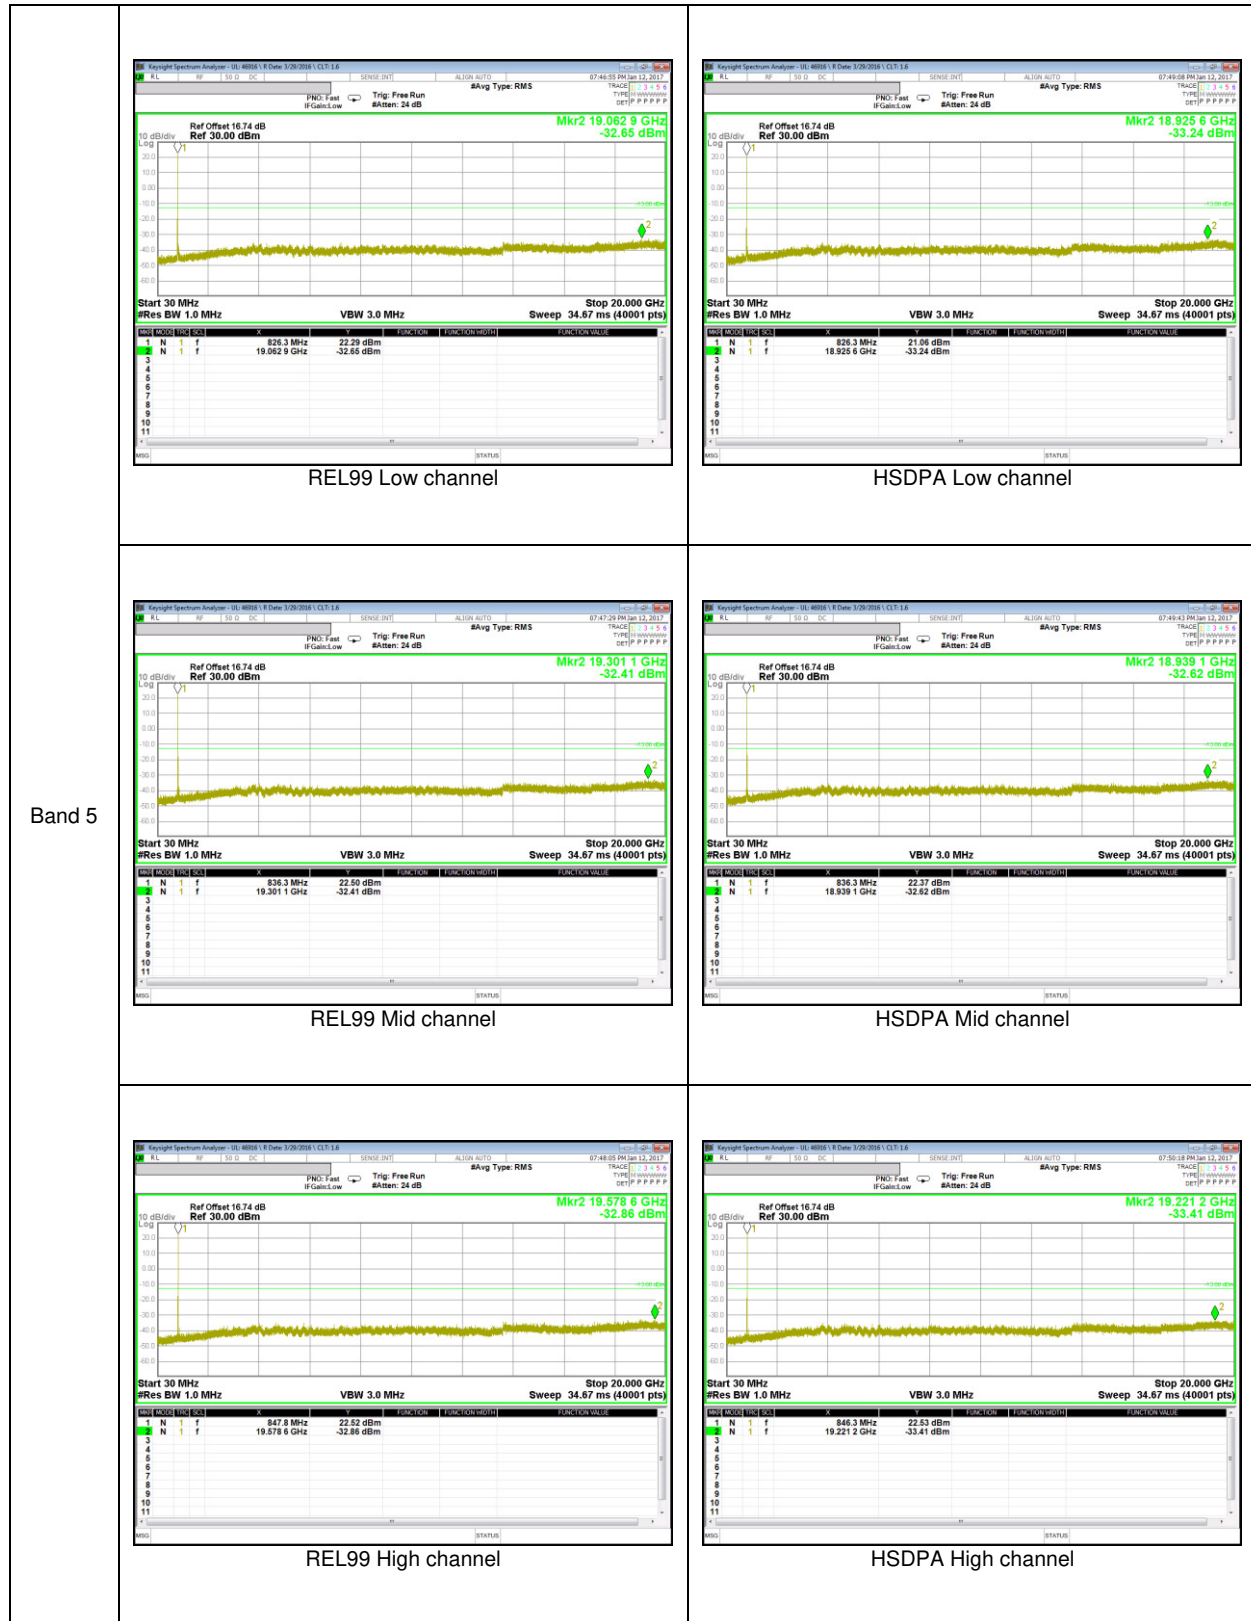



**WCDMA Band 2**

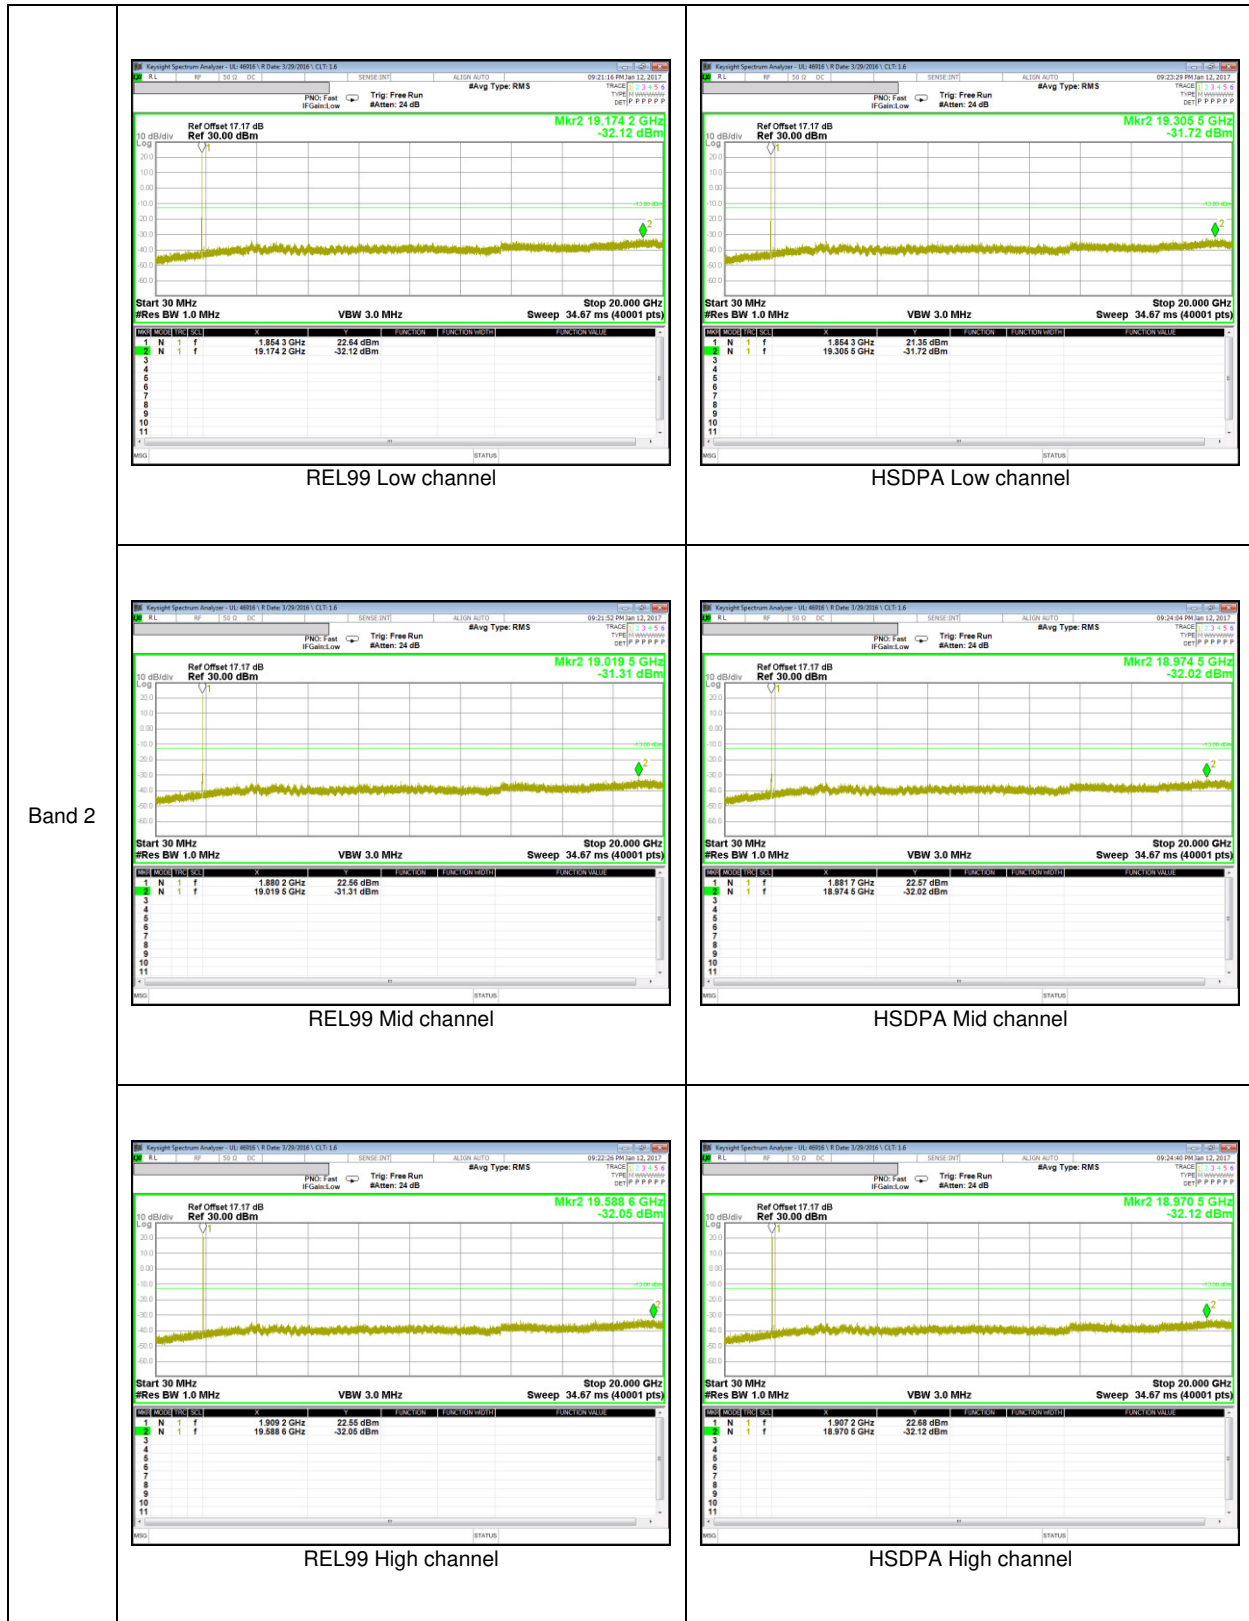



Band 2

**LTE Band 5**

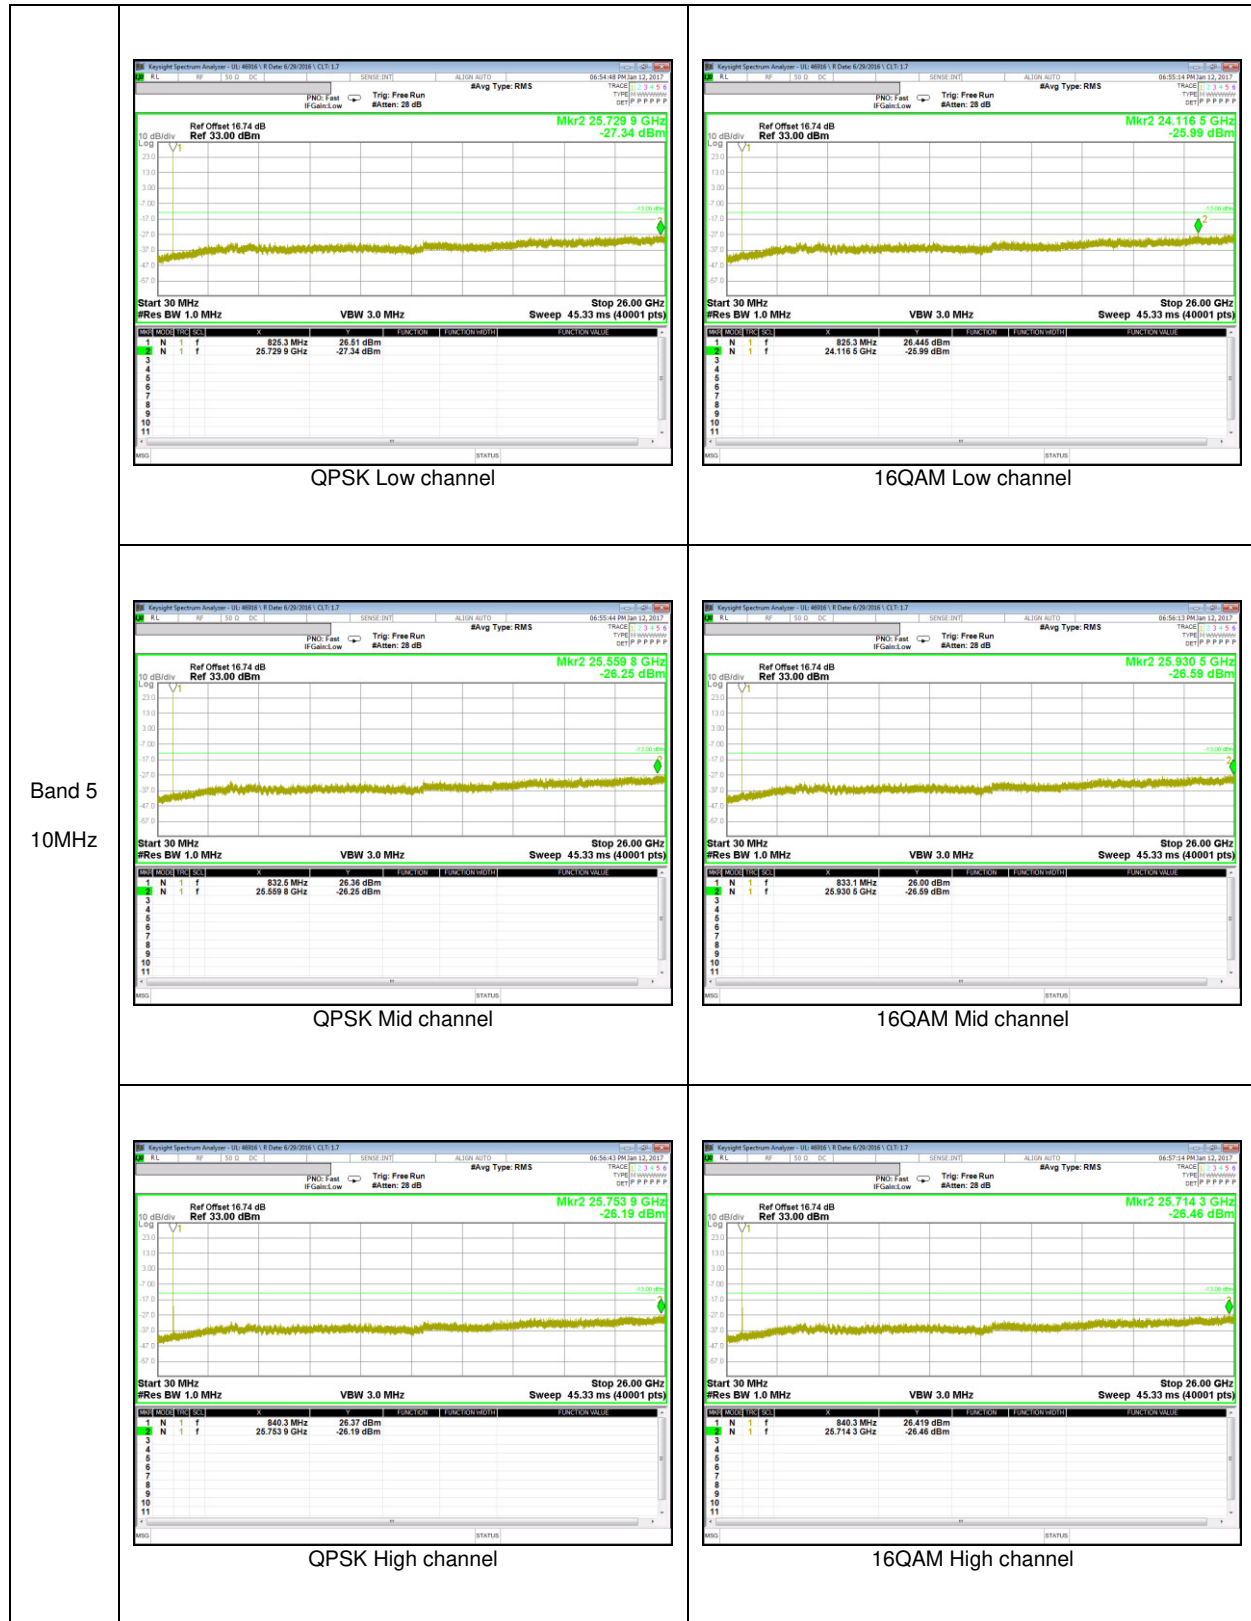


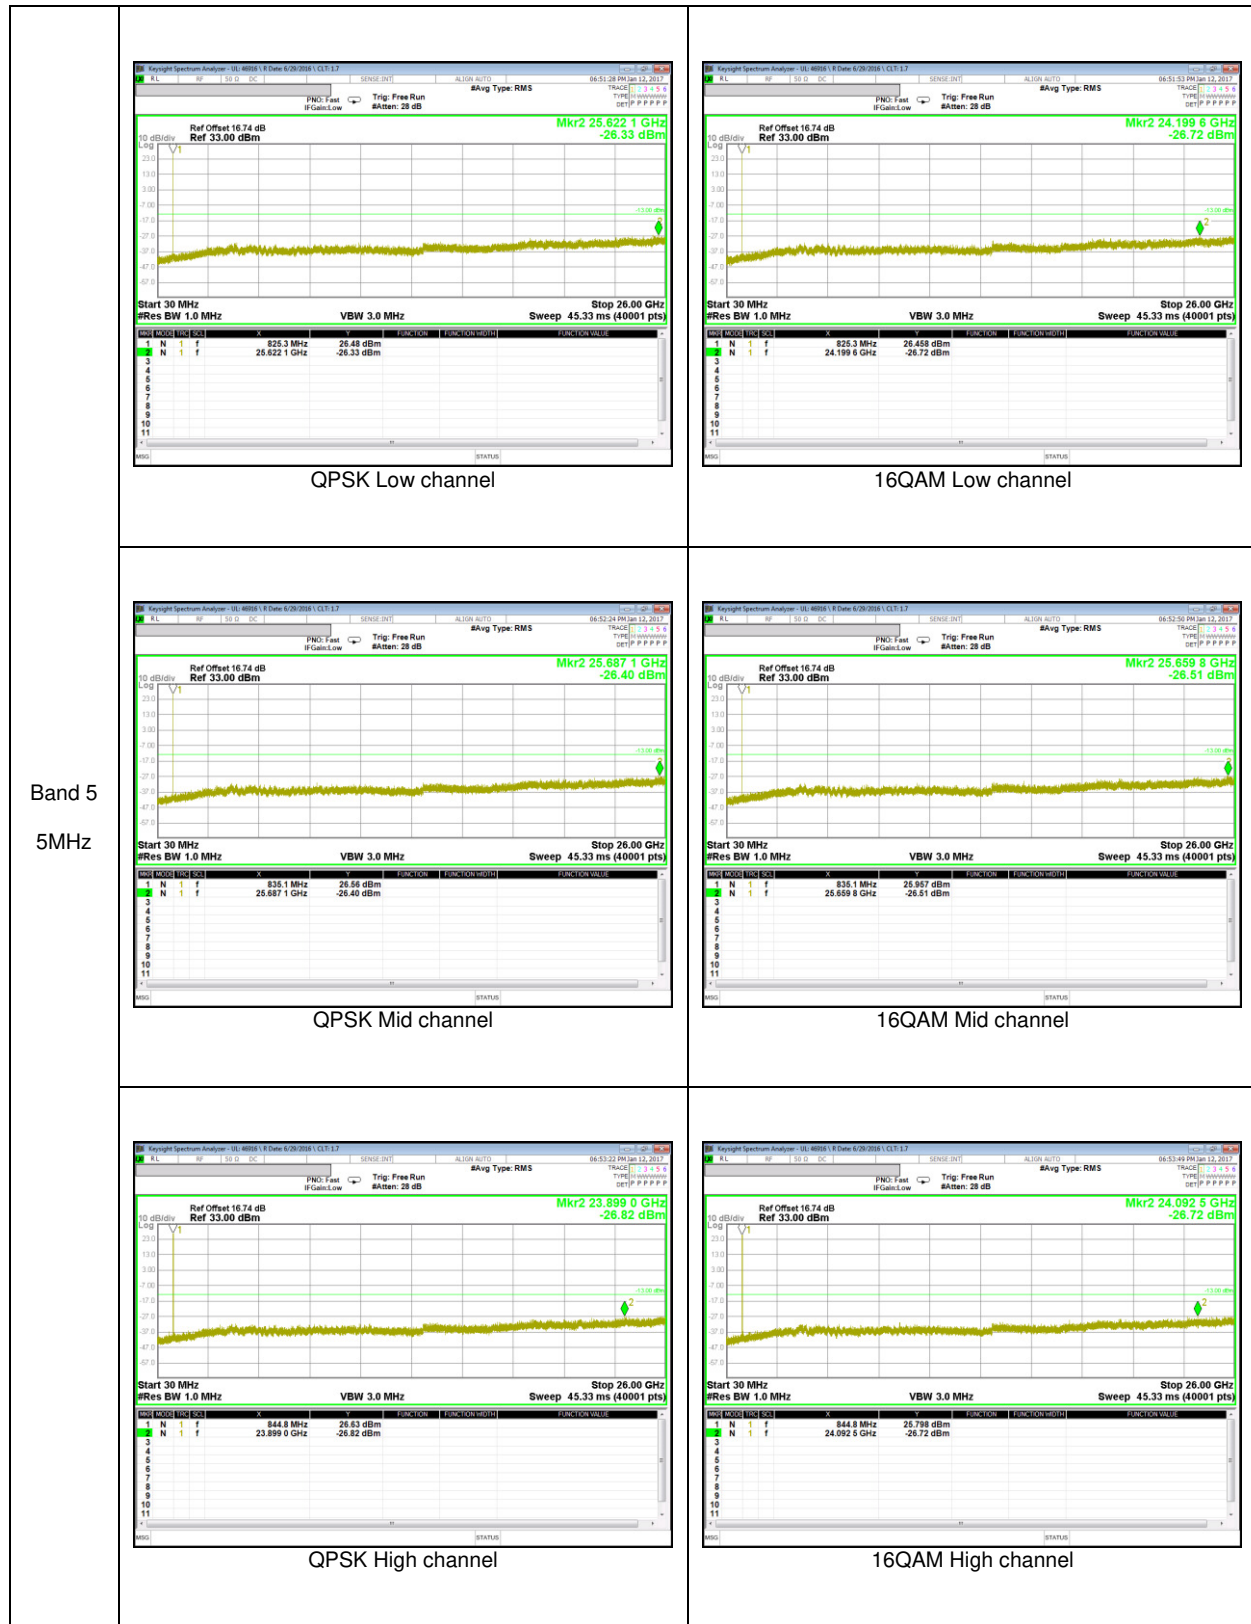


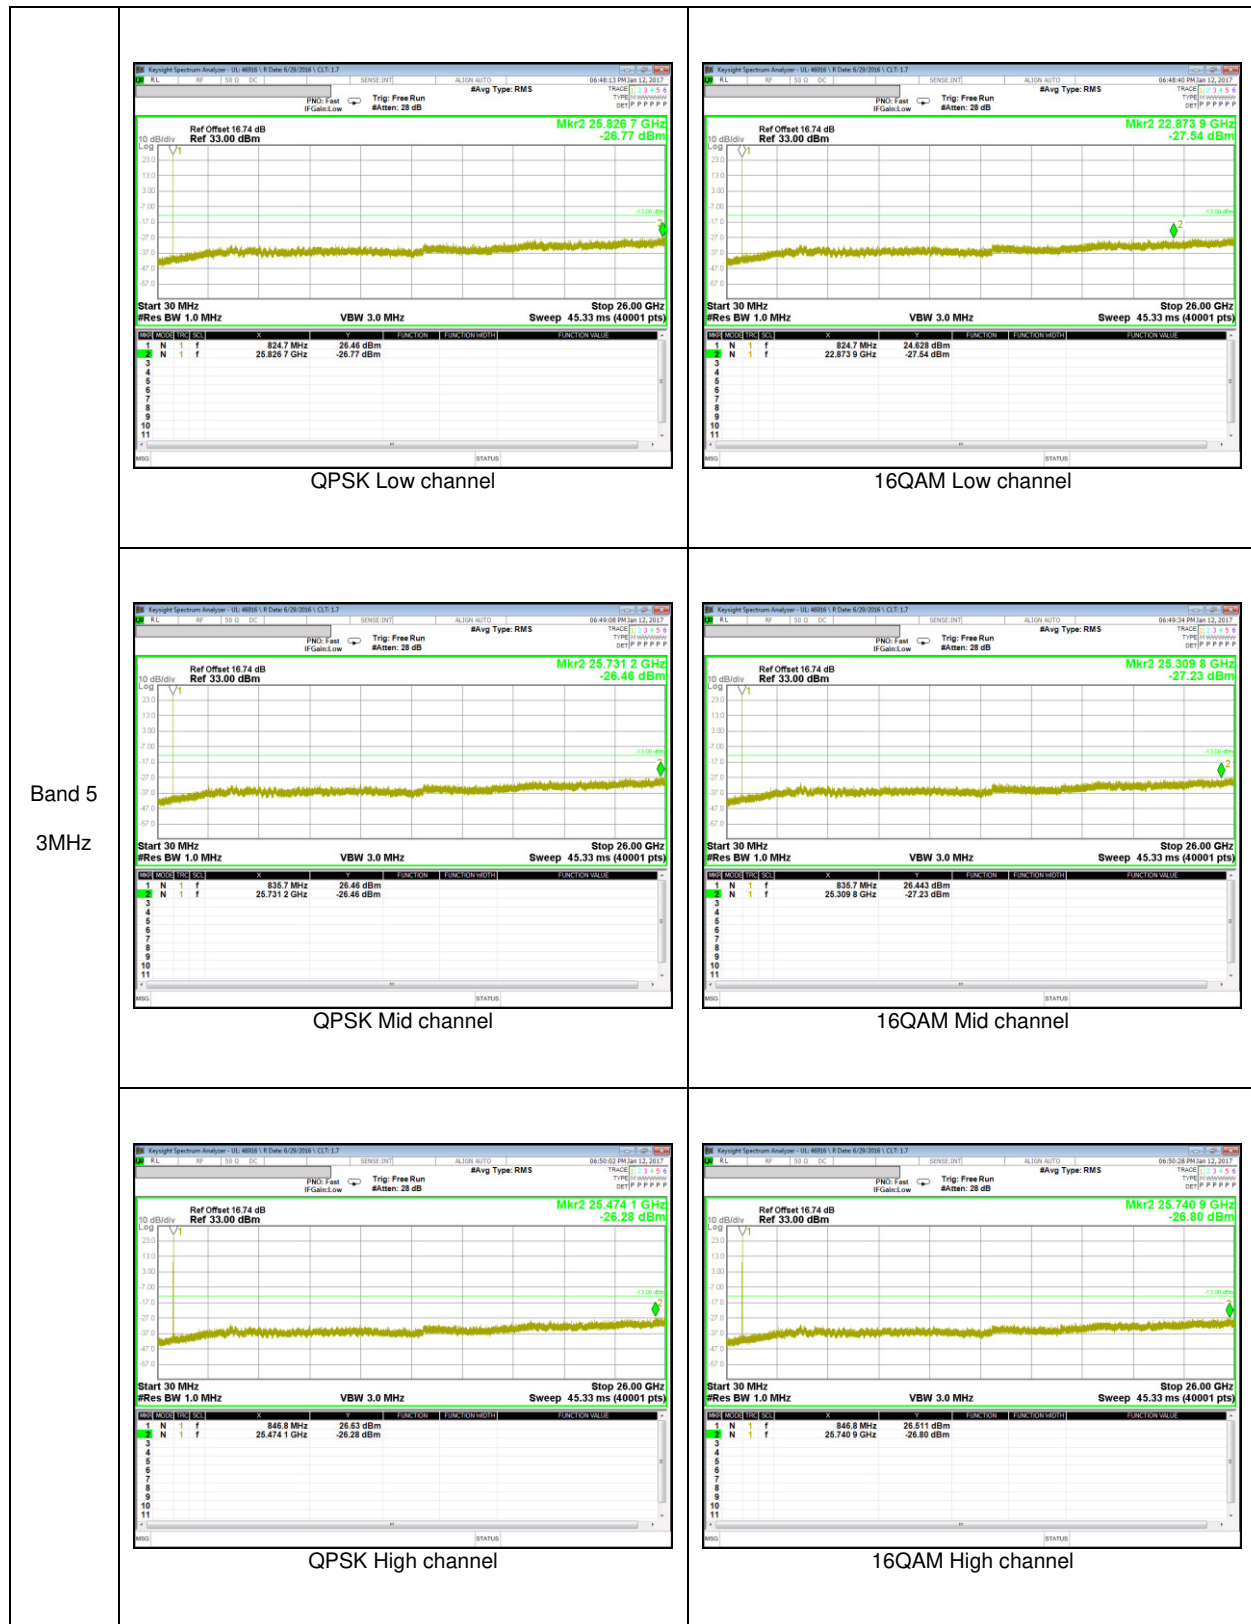


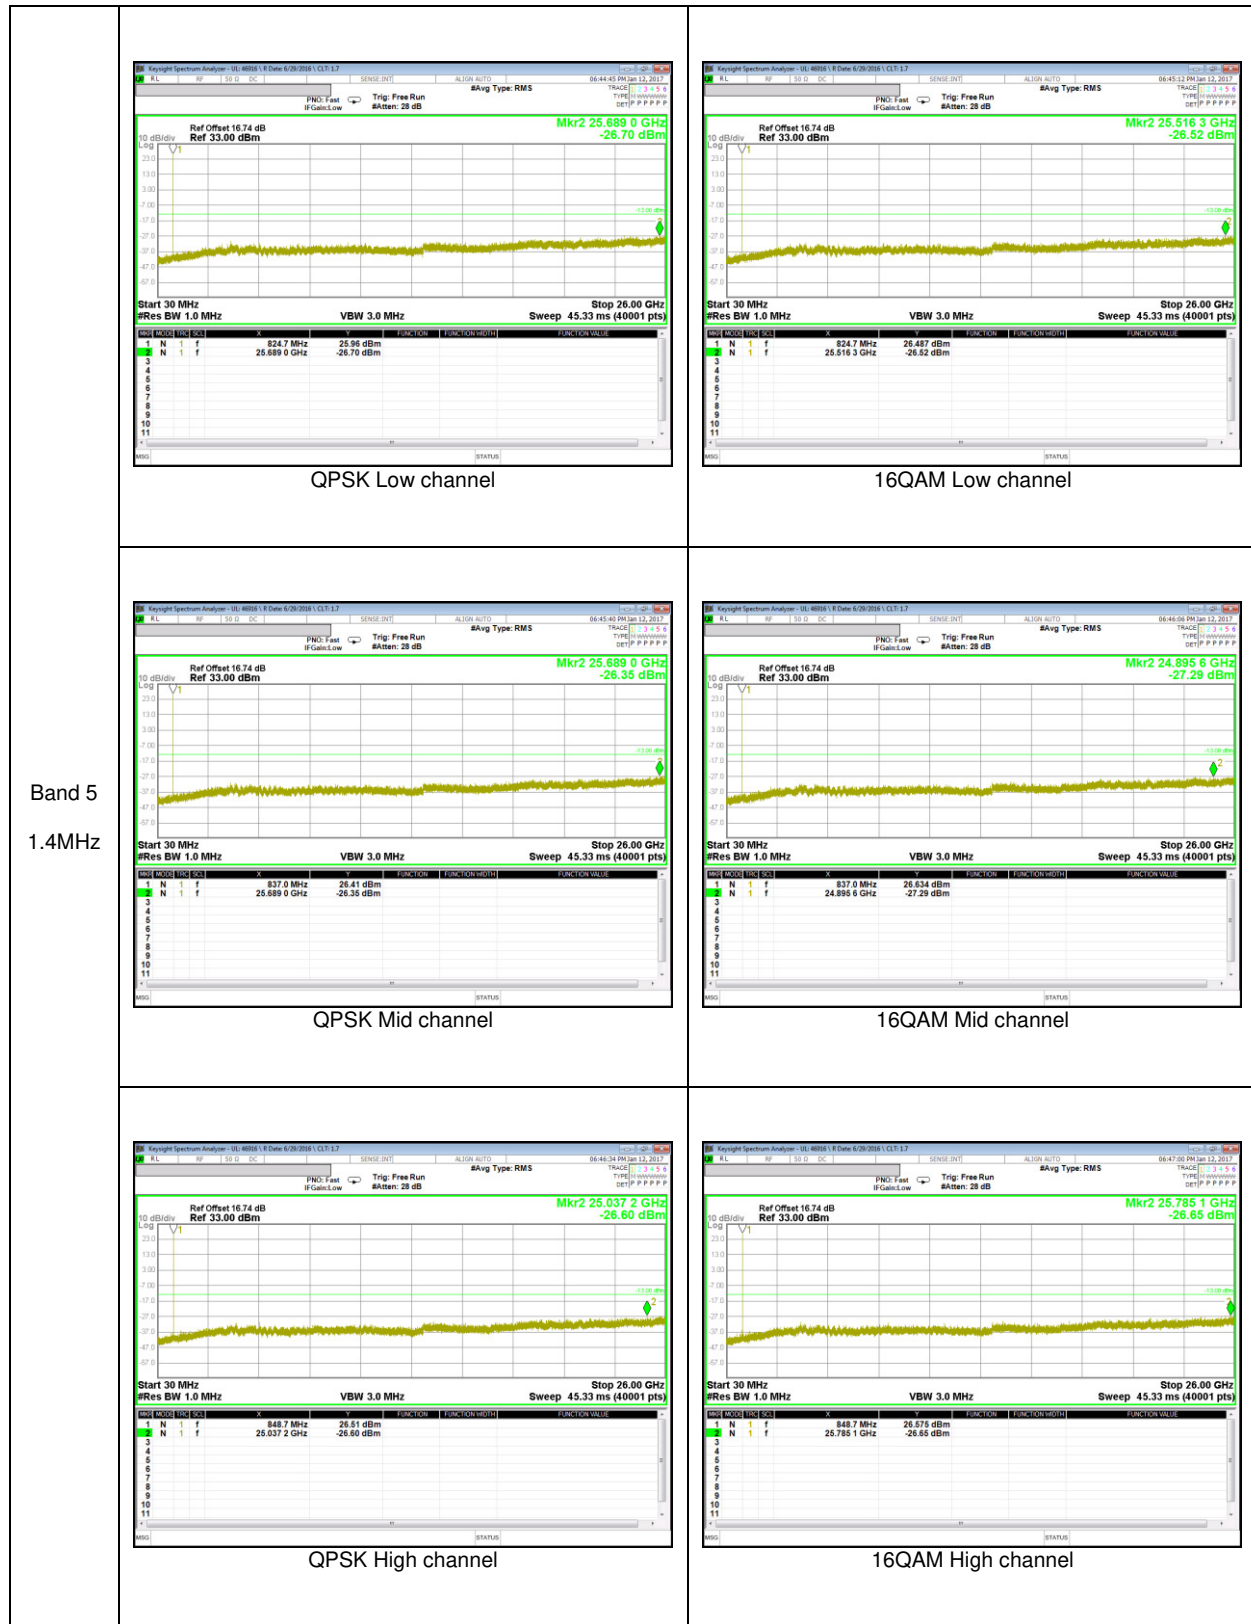


**LTE Band 41**

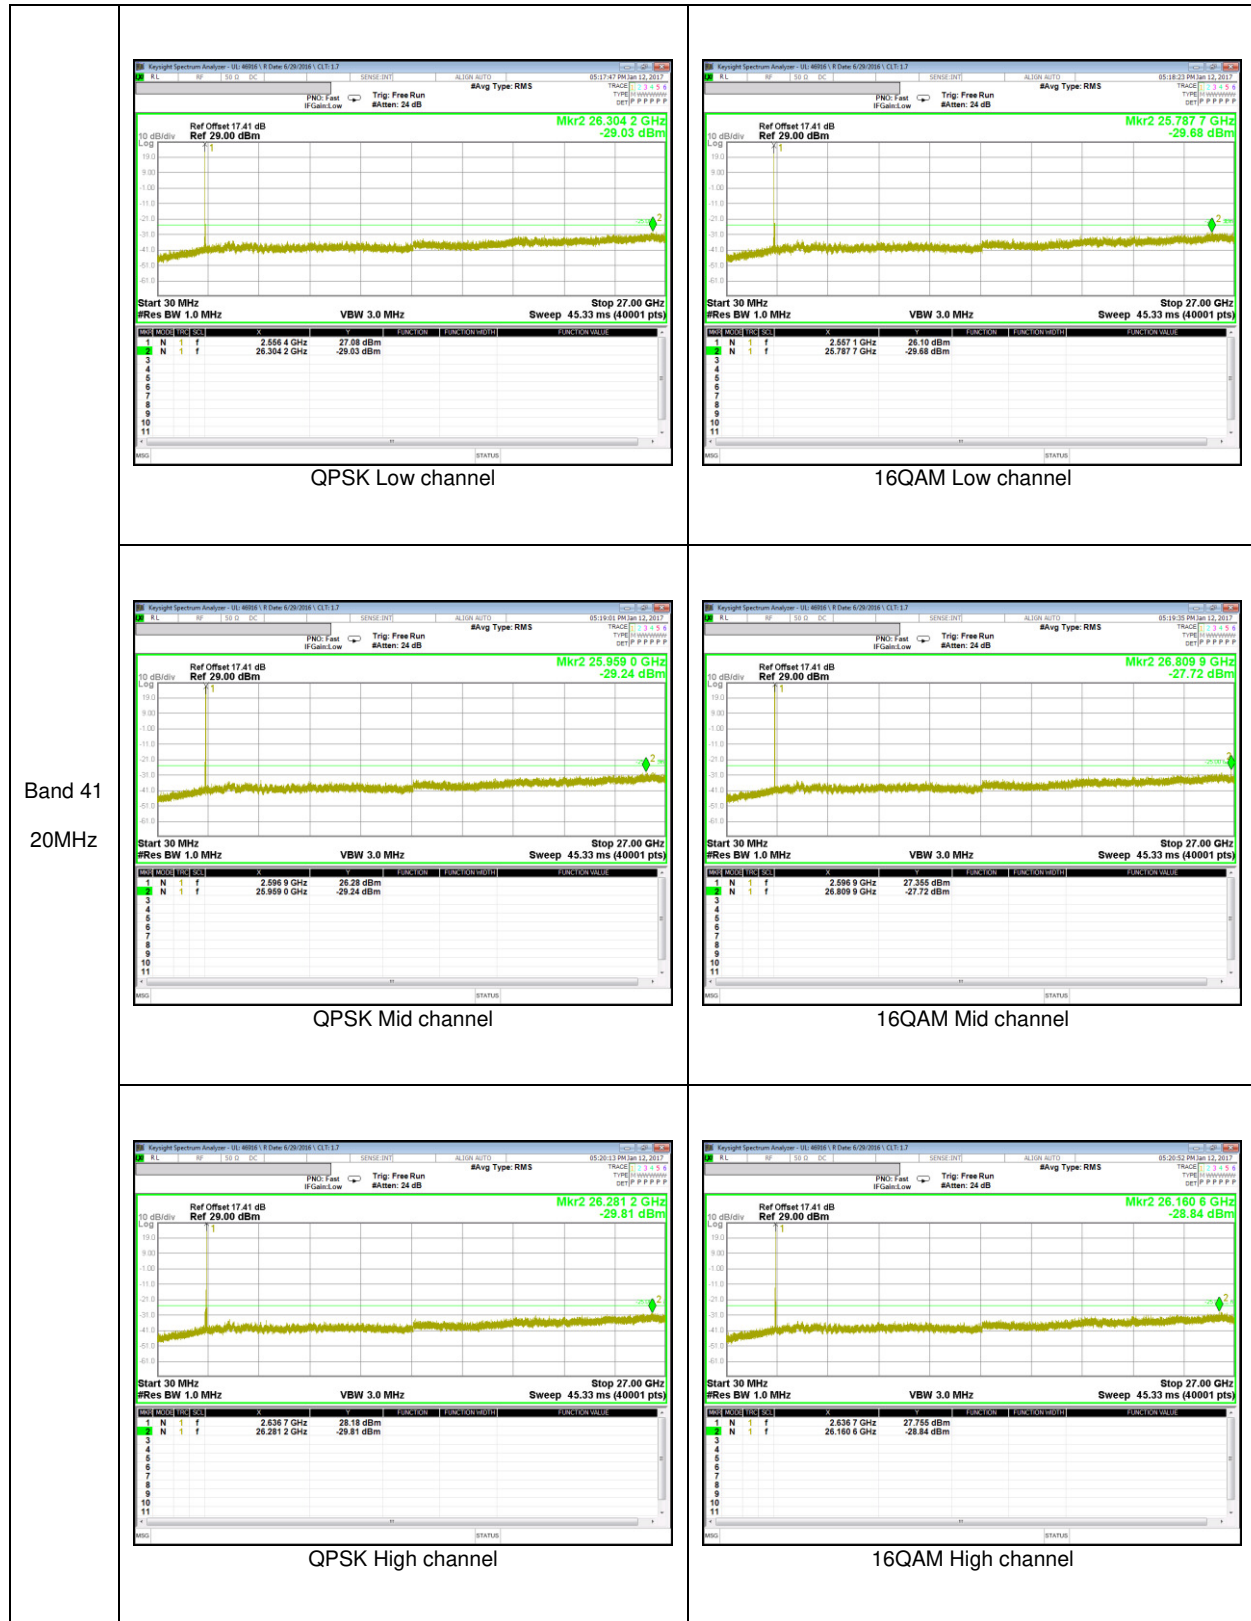

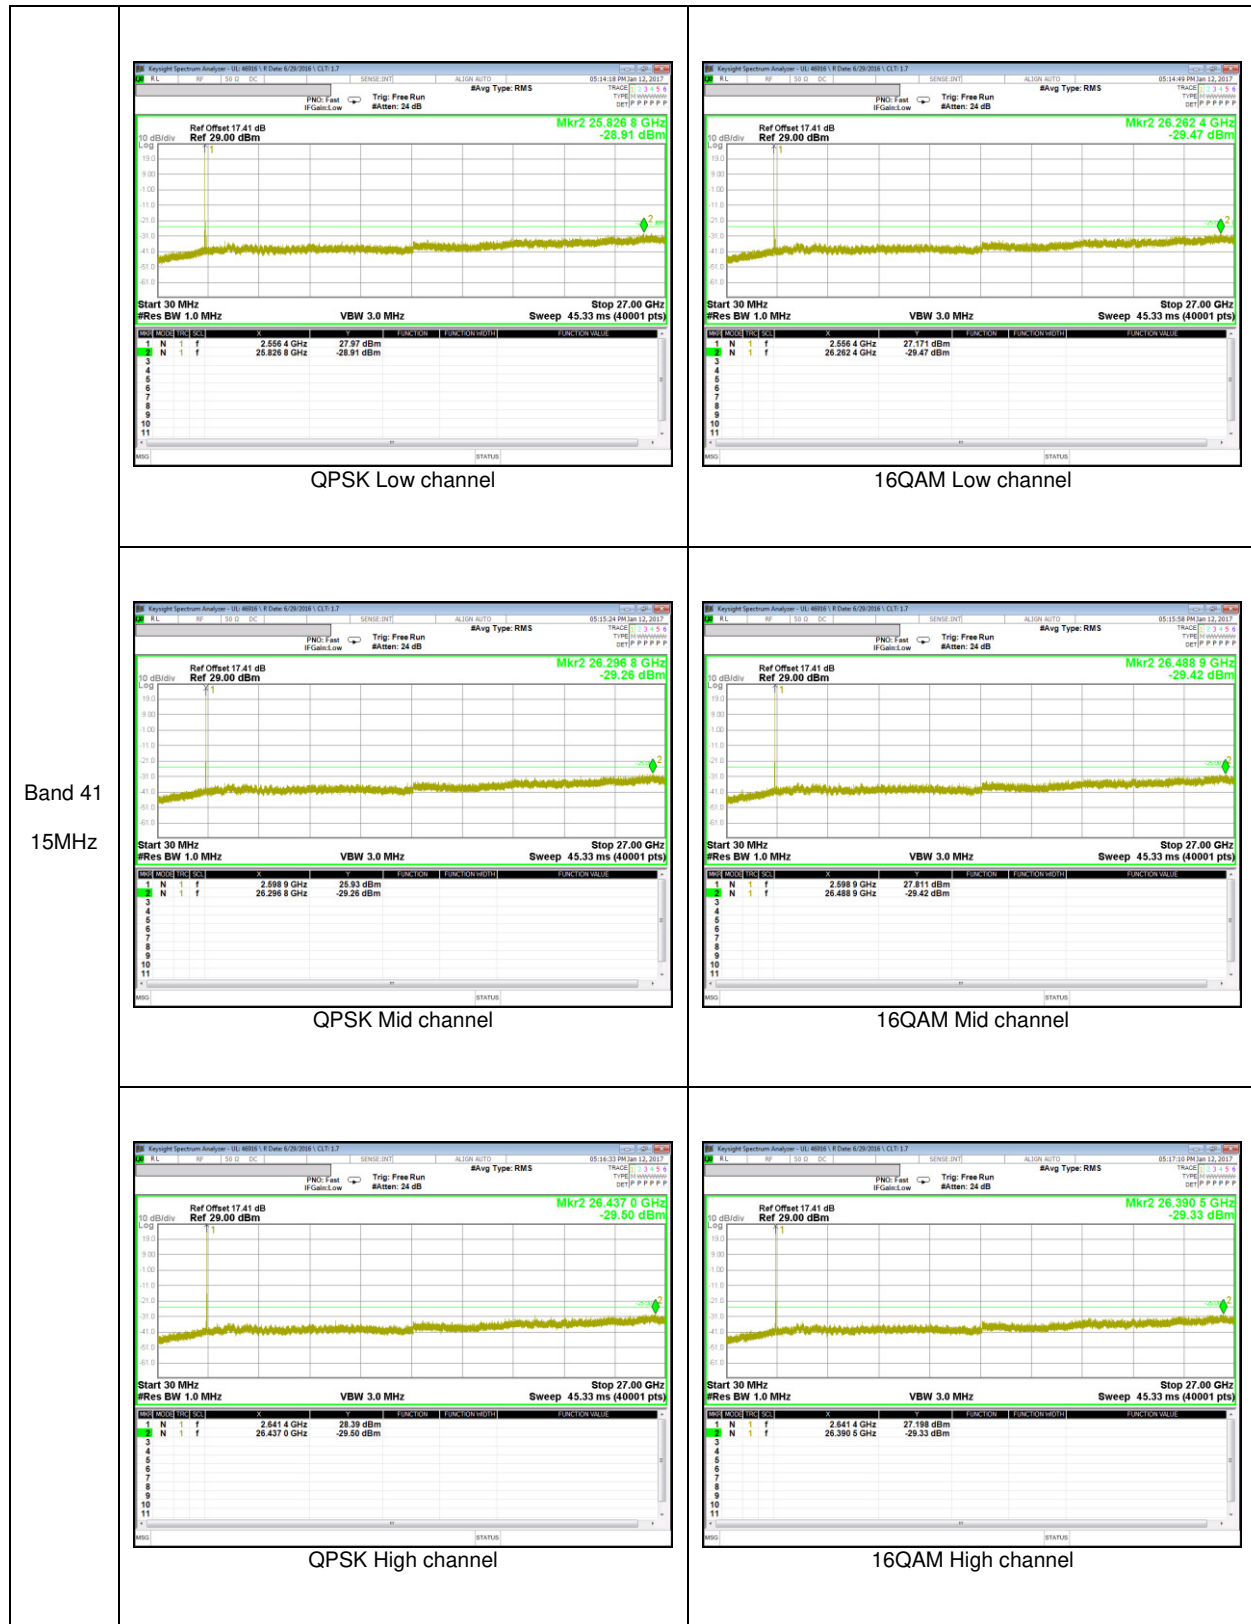

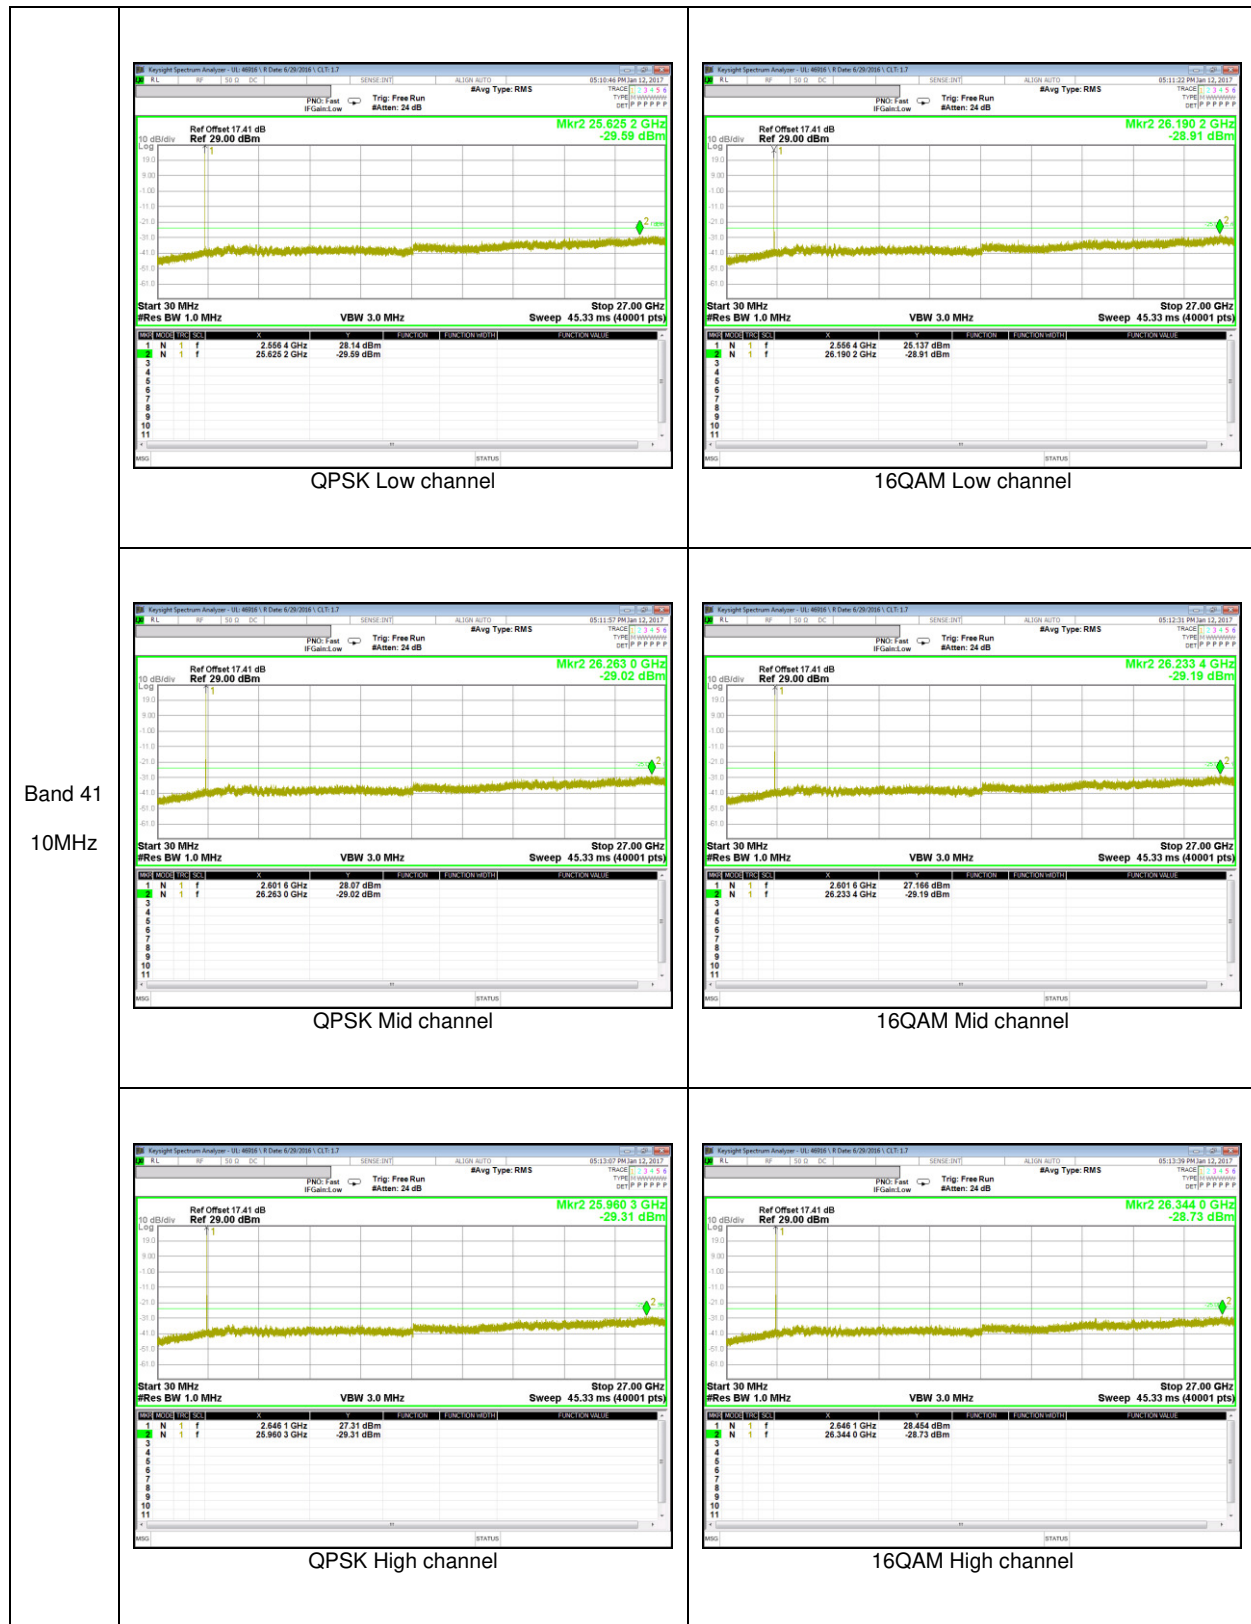

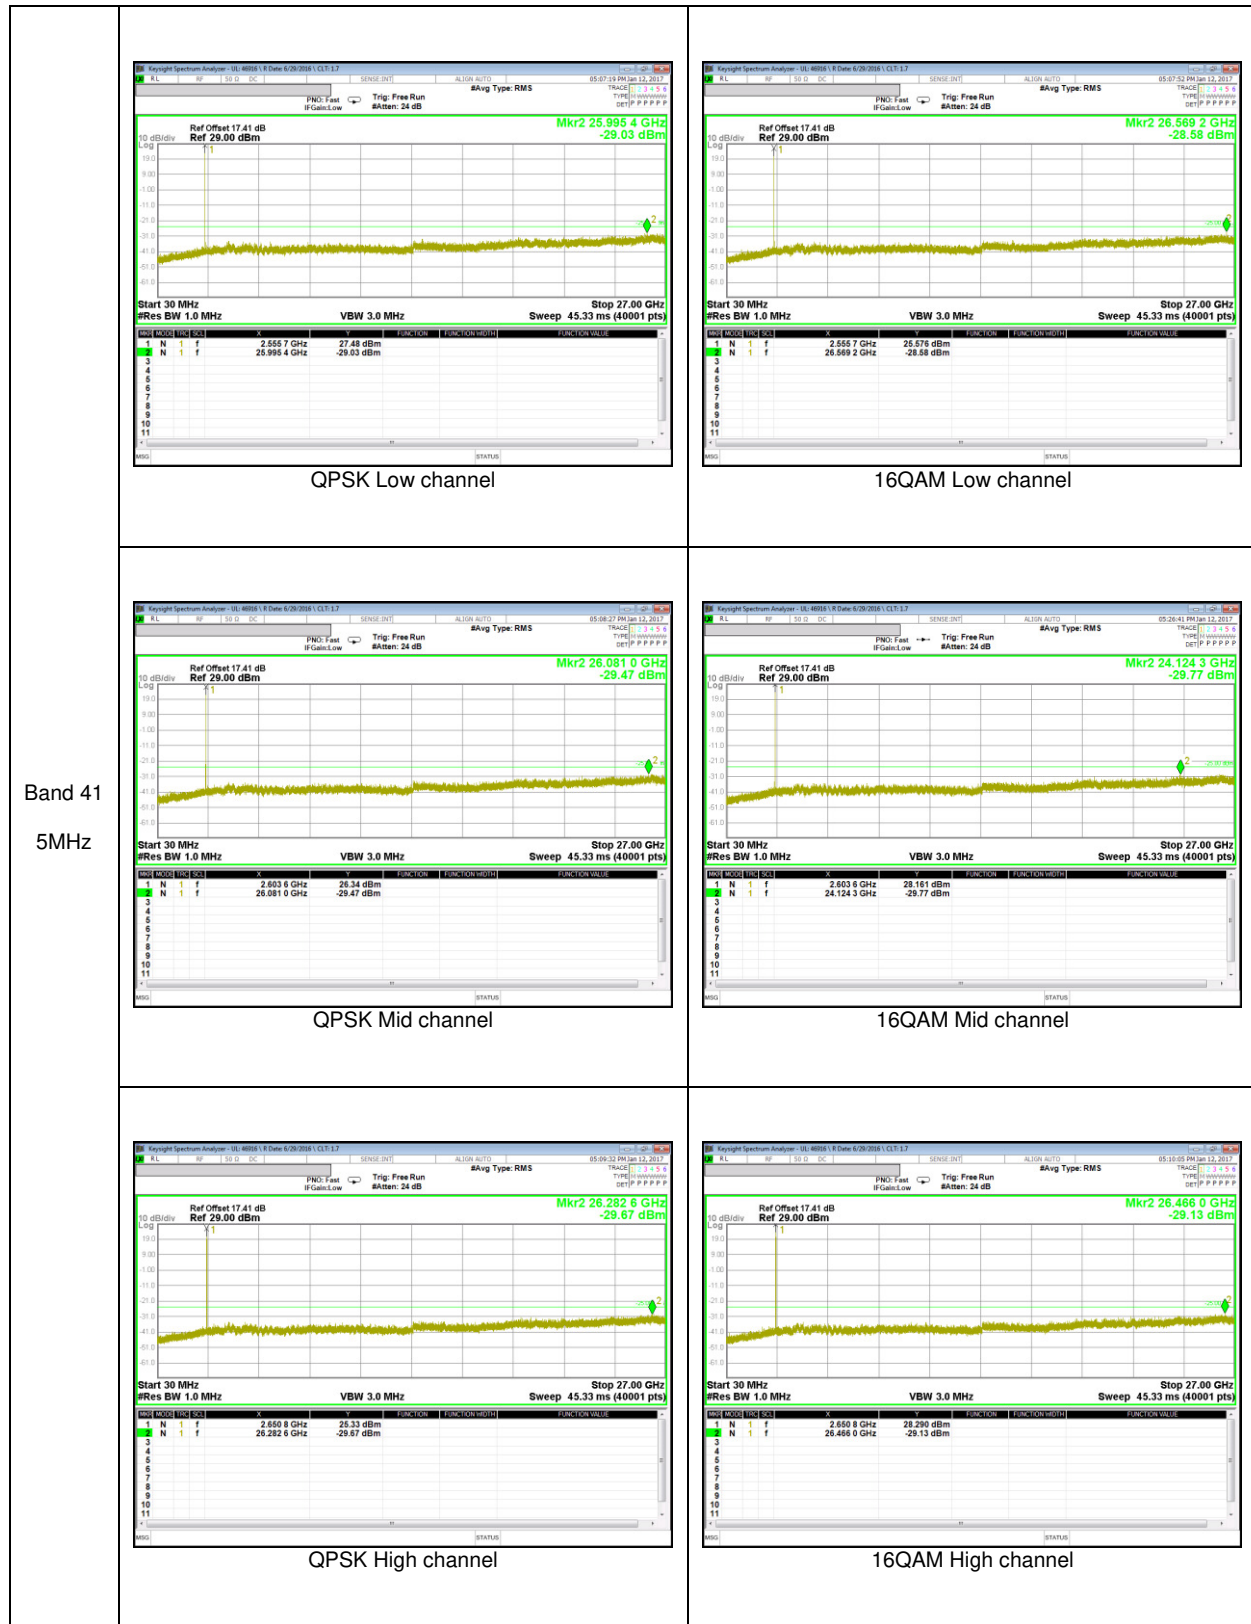

## **10.4. FREQUENCY STABILITY**

### **RULE PART(S)**

FCC: §2.1055, §22.355, §24.235 and §27.54

### **LIMITS**

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

### **RESULTS**

See the following pages.

**10.4.1. FREQUENCY STABILITY RESULTS**

**GSM 850, Channel 190, Frequency 836.6 MHz**

Reference Frequency: GSM850 Mid Channel 836.6 MHz @ 20°C				
Limit: ± 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.60004361	-0.004	2.5
3.80	40	836.60004252	-0.002	2.5
3.80	30	836.60004146	-0.001	2.5
<b>3.80</b>	<b>20</b>	<b>836.60004055</b>	<b>0</b>	<b>2.5</b>
3.80	10	836.60004249	-0.002	2.5
3.80	0	836.60004194	-0.002	2.5
3.80	-10	836.60003965	0.001	2.5
3.80	-20	836.60003994	0.001	2.5
3.80	-30	836.60004039	0.000	2.5

Reference Frequency: GSM850 Mid Channel 836.6 MHz @ 20°C				
Limit: ± 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>836.60004055</b>	<b>0</b>	<b>2.5</b>
4.30	20	836.60004036	0.000	2.5
3.60	20	836.60004142	-0.001	2.5

**WCDMA Band 5, Channel 4183, Frequency 836.6 MHz**

Reference Frequency: WCDMA Band 5 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	836.59999624	0.000	2.5
3.80	40	836.59999563	0.001	2.5
3.80	30	836.59999680	0.000	2.5
<b>3.80</b>	<b>20</b>	836.59999657	<b>0</b>	<b>2.5</b>
3.80	10	836.59999720	-0.001	2.5
3.80	0	836.59999649	0.000	2.5
3.80	-10	836.59999532	0.001	2.5
3.80	-20	836.59999570	0.001	2.5
3.80	-30	836.59999598	0.001	2.5

Reference Frequency: WCDMA Band 5 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
<b>3.80</b>	<b>20</b>	<b>836.59999657</b>	<b>0</b>	<b>2.5</b>
4.30	20	836.59999668	0.000	2.5
3.60	20	836.59999681	0.000	2.5

**LTE Band 5, Channel 20524, Frequency 836.5 MHz**

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
		Limit: +- 2.5 ppm = 2091.250 Hz		
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	836.50000539	0.000	2.5
3.80	40	836.50000583	-0.001	2.5
3.80	30	836.50000407	0.001	2.5
<b>3.80</b>	<b>20</b>	836.50000514	<b>0</b>	<b>2.5</b>
3.80	10	836.50000481	0.000	2.5
3.80	0	836.50000462	0.001	2.5
3.80	-10	836.50000415	0.001	2.5
3.80	-20	836.50000501	0.000	2.5
3.80	-30	836.50000549	0.000	2.5

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
		Limit: +- 2.5 ppm = 2091.250 Hz		
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
<b>3.80</b>	<b>20</b>	<b>836.50000514</b>	<b>0</b>	<b>2.5</b>
4.30	20	836.50000432	0.001	2.5
3.60	20	836.50000561	-0.001	2.5

**GSM 1900, Channel 661, Frequency 1880.0 MHz**

Reference Frequency: GSM1900 Mid Channel 1880 MHz @ 20°C				
Limit: ± 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.00004333	0.002	2.5
3.80	40	1880.00004859	-0.001	2.5
3.80	30	1880.00004468	0.001	2.5
<b>3.80</b>	<b>20</b>	<b>1880.00004701</b>	<b>0</b>	<b>2.5</b>
3.80	10	1880.00004652	0.000	2.5
3.80	0	1880.00004884	-0.001	2.5
3.80	-10	1880.00004865	-0.001	2.5
3.80	-20	1880.00005011	-0.002	2.5
3.80	-30	1880.00004730	0.000	2.5

Reference Frequency: GSM1900 Mid Channel 1880 MHz @ 20°C				
Limit: ± 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>1880.00004701</b>	<b>0</b>	<b>2.5</b>
4.30	20	1880.00004736	0.000	2.5
3.60	20	1880.00004433	0.001	2.5

**WCDMA Band 2, Channel 9400, Frequency 1880.0 MHz**

Reference Frequency: WCDMA Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	1880.00000743	-0.007	2.5
3.80	40	1879.99999283	0.001	2.5
3.80	30	1879.99999376	0.000	2.5
<b>3.80</b>	<b>20</b>	1879.99999394	<b>0</b>	<b>2.5</b>
3.80	10	1879.99999418	0.000	2.5
3.80	0	1879.99999326	0.000	2.5
3.80	-10	1879.99999446	0.000	2.5
3.80	-20	1879.99999379	0.000	2.5
3.80	-30	1879.99999288	0.001	2.5

Reference Frequency: WCDMA Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
<b>3.80</b>	<b>20</b>	<b>1879.99999394</b>	<b>0</b>	<b>2.5</b>
4.30	20	1879.99999351	0.000	2.5
3.60	20	1879.99999427	0.000	2.5

**LTE Band 41, Channel 40740, Frequency 2605.0 MHz**

Reference Frequency: LTE Band41 Mid Channel 2605 MHz @ 20°C				
Limit: ± 2.5 ppm = 6482.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	2605.00003516	-0.001	2.5
3.80	40	2605.00003647	-0.002	2.5
3.80	30	2605.00003671	-0.002	2.5
<b>3.80</b>	<b>20</b>	<b>2605.00003161</b>	<b>0</b>	<b>2.5</b>
3.80	10	2605.00003509	-0.001	2.5
3.80	0	2605.00003439	-0.001	2.5
3.80	-10	2605.00003359	-0.001	2.5
3.80	-20	2605.00003442	-0.001	2.5
3.80	-30	2605.00003585	-0.002	2.5

Reference Frequency: LTE Band41 Mid Channel 2605 MHz @ 20°C				
Limit: ± 2.5 ppm = 6482.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>2605.00003161</b>	<b>0</b>	<b>2.5</b>
4.30	20	2605.00003420	-0.001	2.5
3.60	20	2605.00003523	-0.001	2.5

## 11. RADIATED TEST RESULTS

### 11.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50

#### LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(h) - (2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.(LTE B41)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

#### TEST PROCEDURE

ANSI / TIA / EIA 603D Clause 2.2.17; ESU40 setting reference to 971168 D01 v02r02

For peak power measurement with a ESU40:

a) Set the RBW  $\geq$  OBW; b) Set VBW  $\geq 3 \times$  RBW; c) Set span  $\geq 2 \times$  RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points  $\geq$  span/RBW; g) Trace mode = max hold;

For average power measurement with a ESU40:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW  $\geq 3 \times$  RBW; d) Set number of points in sweep  $\geq 2 \times$  span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle  $\geq 98$ ; h) Use trigger to capture bursts If burst duty cycle  $< 98$ ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function. (RBW/VBW are automatically set for LTE B41)

#### TEST RESULTS

**11.1.1. ERP/EIRP Results**

**GSM**

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	512	824.2	32.83	1918.67
		661	836.6	32.56	1803.02
		810	848.8	33.36	2167.70
	EGPRS	512	824.2	26.76	474.24
		661	836.6	26.98	498.88
		810	848.8	27.84	608.14
GSM1900	GPRS	512	1850.2	30.35	1083.93
		661	1880.0	30.82	1207.81
		810	1909.8	30.60	1148.15
	EGPRS	512	1850.2	27.04	505.82
		661	1880.0	27.22	527.23
		810	1909.8	26.99	500.03

**WCDMA**

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	21.06	127.64
		4183	836.6	21.21	132.13
		4233	846.6	21.63	145.55
	HSDPA	4132	826.4	19.90	97.72
		4183	836.6	19.67	92.68
		4233	846.6	19.72	93.76
Band 2	REL99	9262	1852.4	21.92	155.60
		9400	1880.0	22.82	191.43
		9538	1907.6	22.08	161.44
	HSDPA	9262	1852.4	21.01	126.18
		9400	1880.0	21.70	147.91
		9538	1907.6	20.92	123.59

**LTE Band 5**

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 5	10	QPSK	50/0	829.0	20.16	103.75
			50/0	836.5	20.19	104.47
			50/0	844.0	20.15	103.51
		16QAM	50/0	829.0	19.08	80.91
			50/0	836.5	19.09	81.10
			50/0	844.0	19.07	80.72
	5	QPSK	25/0	826.5	20.44	110.66
			25/0	836.5	20.21	104.95
			25/0	846.5	19.79	95.28
		16QAM	25/0	826.5	19.44	87.90
			25/0	836.5	19.14	82.04
			25/0	846.5	19.26	84.33
	3	QPSK	15/0	825.5	20.53	112.98
			15/0	836.5	20.26	106.17
			15/0	847.5	19.84	96.38
		16QAM	15/0	825.5	19.46	88.31
			15/0	836.5	19.19	82.99
			15/0	847.5	19.30	85.11
	1.4	QPSK	6/0	824.7	18.47	70.31
			6/0	836.5	18.11	64.71
			6/0	848.3	17.57	57.15
		16QAM	6/0	824.7	17.41	55.08
			6/0	836.5	17.10	51.29
			6/0	848.3	17.07	50.93

**LTE Band 41**

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 41	20	QPSK	100/0	2565.0	15.44	34.99
			100/0	2605.0	17.18	52.24
			100/0	2645.0	16.91	49.09
		16QAM	100/0	2565.0	14.16	26.06
			100/0	2605.0	15.60	36.31
			100/0	2645.0	15.42	34.83
	15	QPSK	75/0	2562.5	15.00	31.62
			75/0	2605.0	16.56	45.29
			75/0	2647.5	15.89	38.82
		16QAM	75/0	2562.5	13.43	22.03
			75/0	2605.0	15.21	33.19
			75/0	2647.5	14.41	27.61
	10	QPSK	50/0	2560.0	15.74	37.50
			50/0	2605.0	14.76	29.92
			50/0	2650.0	16.21	41.78
		16QAM	50/0	2560.0	14.13	25.88
			50/0	2605.0	13.18	20.80
			50/0	2650.0	14.67	29.31
	5	QPSK	25/0	2557.5	16.87	48.64
			25/0	2605.0	14.11	25.76
			25/0	2652.5	15.67	36.90
		16QAM	25/0	2557.5	15.78	37.84
			25/0	2605.0	12.87	19.36
			25/0	2652.5	14.53	28.38

**11.1.2. ERP/EIRP DATA**

**GSM 850**

f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
<p><b>High Frequency Substitution Measurement</b>  <b>UL Korea, Ltd. Suwon Laboratory Chamber 2</b></p> <p><b>Company:</b> Samsung  <b>Project #:</b> 4787821324  <b>Date:</b> 02-20-17  <b>Test Engineer:</b> Chan Park  <b>Configuration:</b> EUT ONLY, X Position  <b>Mode:</b> GPRS 850 MHz</p> <p><b>Test Equipment:</b>                      Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT)                      Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.</p>										
<p>Rev. 3.17.11                      Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm</p>										
Low Ch										
824.20		27.76	V	1.1	-1.6	25.14	38.5	-13.3		
824.20		35.45	H	1.1	-1.6	32.83	38.5	-5.6		
Mid Ch										
836.60		28.22	V	1.1	-1.4	25.73	38.5	-12.7		
836.60		35.05	H	1.1	-1.4	32.56	38.5	-5.9		
High Ch										
848.80		27.11	V	1.1	-1.3	24.75	38.5	-13.7		
848.80		35.72	H	1.1	-1.3	33.36	38.5	-5.1		
GSM		<p><b>High Frequency Substitution Measurement</b>  <b>UL Korea, Ltd. Suwon Laboratory Chamber 2</b></p> <p><b>Company:</b> Samsung  <b>Project #:</b> 4787821324  <b>Date:</b> 02-20-17  <b>Test Engineer:</b> Chan Park  <b>Configuration:</b> EUT ONLY, X Position  <b>Mode:</b> EGPRS 850 MHz</p> <p><b>Test Equipment:</b>                      Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT)                      Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.</p>								
GSM850		<p>Rev. 3.17.11                      Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm</p>								
GPRS										
Low Ch										
824.20		21.82	V	1.1	-1.6	19.20	38.5	-19.3		
824.20		29.38	H	1.1	-1.6	26.76	38.5	-11.7		
Mid Ch										
836.60		22.09	V	1.1	-1.4	19.60	38.5	-18.9		
836.60		29.47	H	1.1	-1.4	26.98	38.5	-11.5		
High Ch										
848.80		21.45	V	1.1	-1.3	19.09	38.5	-19.4		
848.80		30.20	H	1.1	-1.3	27.84	38.5	-10.6		
GSM		<p>Rev. 3.17.11                      Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm</p>								
GSM850										
EGPRS										

**GSM 1900**

f GHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																						
										High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2																																																					
<p><b>Company:</b> Samsung  <b>Project #:</b> 4787821324  <b>Date:</b> 01-19-17  <b>Test Engineer:</b> JH Park  <b>Configuration:</b> EUT ONLY, X Position  <b>Mode:</b> GPRS 1900MHz</p> <p><b>Test Equipment:</b>                      Receiving: 3117[00168724] and Chamber 1 SMA Cables                      Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse</p>																																																															
<p>Low Ch</p> <table border="1"> <tr> <td>1850.20</td> <td>23.2</td> <td>V</td> <td>1.60</td> <td>8.80</td> <td>30.35</td> <td>33.0</td> <td>-2.7</td> <td></td> </tr> <tr> <td>1850.20</td> <td>22.2</td> <td>H</td> <td>1.60</td> <td>8.80</td> <td>29.38</td> <td>33.0</td> <td>-3.6</td> <td></td> </tr> </table> <p>Mid Ch</p> <table border="1"> <tr> <td>1880.00</td> <td>23.8</td> <td>V</td> <td>1.62</td> <td>8.62</td> <td>30.82</td> <td>33.0</td> <td>-2.2</td> <td></td> </tr> <tr> <td>1880.00</td> <td>23.2</td> <td>H</td> <td>1.62</td> <td>8.62</td> <td>30.22</td> <td>33.0</td> <td>-2.8</td> <td></td> </tr> </table> <p>High Ch</p> <table border="1"> <tr> <td>1909.80</td> <td>23.8</td> <td>V</td> <td>1.63</td> <td>8.44</td> <td>30.60</td> <td>33.0</td> <td>-2.4</td> <td></td> </tr> <tr> <td>1909.80</td> <td>22.6</td> <td>H</td> <td>1.63</td> <td>8.44</td> <td>29.43</td> <td>33.0</td> <td>-3.6</td> <td></td> </tr> </table>										1850.20	23.2	V	1.60	8.80	30.35	33.0	-2.7		1850.20	22.2	H	1.60	8.80	29.38	33.0	-3.6		1880.00	23.8	V	1.62	8.62	30.82	33.0	-2.2		1880.00	23.2	H	1.62	8.62	30.22	33.0	-2.8		1909.80	23.8	V	1.63	8.44	30.60	33.0	-2.4		1909.80	22.6	H	1.63	8.44	29.43	33.0	-3.6	
1850.20	23.2	V	1.60	8.80	30.35	33.0	-2.7																																																								
1850.20	22.2	H	1.60	8.80	29.38	33.0	-3.6																																																								
1880.00	23.8	V	1.62	8.62	30.82	33.0	-2.2																																																								
1880.00	23.2	H	1.62	8.62	30.22	33.0	-2.8																																																								
1909.80	23.8	V	1.63	8.44	30.60	33.0	-2.4																																																								
1909.80	22.6	H	1.63	8.44	29.43	33.0	-3.6																																																								
Rev. 3.17.11																																																															
<p><b>Company:</b> Samsung  <b>Project #:</b> 4787821324  <b>Date:</b> 01-19-17  <b>Test Engineer:</b> JH Park  <b>Configuration:</b> EUT ONLY, X Position  <b>Mode:</b> EGPRS 1900MHz</p> <p><b>Test Equipment:</b>                      Receiving: 3117[00168724] and Chamber 1 SMA Cables                      Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse</p>																																																															
<p>Low Ch</p> <table border="1"> <tr> <td>1850.20</td> <td>19.8</td> <td>V</td> <td>1.60</td> <td>8.80</td> <td>27.04</td> <td>33.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td>1850.20</td> <td>18.6</td> <td>H</td> <td>1.60</td> <td>8.80</td> <td>25.82</td> <td>33.0</td> <td>-7.2</td> <td></td> </tr> </table> <p>Mid Ch</p> <table border="1"> <tr> <td>1880.00</td> <td>20.2</td> <td>V</td> <td>1.62</td> <td>8.62</td> <td>27.22</td> <td>33.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td>1880.00</td> <td>19.6</td> <td>H</td> <td>1.62</td> <td>8.62</td> <td>26.58</td> <td>33.0</td> <td>-6.4</td> <td></td> </tr> </table> <p>High Ch</p> <table border="1"> <tr> <td>1909.80</td> <td>20.2</td> <td>V</td> <td>1.63</td> <td>8.44</td> <td>26.99</td> <td>33.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td>1909.80</td> <td>19.1</td> <td>H</td> <td>1.63</td> <td>8.44</td> <td>25.90</td> <td>33.0</td> <td>-7.1</td> <td></td> </tr> </table>										1850.20	19.8	V	1.60	8.80	27.04	33.0	-6.0		1850.20	18.6	H	1.60	8.80	25.82	33.0	-7.2		1880.00	20.2	V	1.62	8.62	27.22	33.0	-5.8		1880.00	19.6	H	1.62	8.62	26.58	33.0	-6.4		1909.80	20.2	V	1.63	8.44	26.99	33.0	-6.0		1909.80	19.1	H	1.63	8.44	25.90	33.0	-7.1	
1850.20	19.8	V	1.60	8.80	27.04	33.0	-6.0																																																								
1850.20	18.6	H	1.60	8.80	25.82	33.0	-7.2																																																								
1880.00	20.2	V	1.62	8.62	27.22	33.0	-5.8																																																								
1880.00	19.6	H	1.62	8.62	26.58	33.0	-6.4																																																								
1909.80	20.2	V	1.63	8.44	26.99	33.0	-6.0																																																								
1909.80	19.1	H	1.63	8.44	25.90	33.0	-7.1																																																								
Rev. 3.17.11																																																															

**WCDMA Band 5**

WCDMA Band 5 REL99		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2									
		Company: Samsung Project #: 4787821324 Date: 01-16-17 Test Engineer: Chan Park Configuration: EUT ONLY, X Position Mode: Rel 99_850 MHz  <u>Test Equipment:</u> Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
		Low Ch									
		826.40	16.69	V	1.1	-1.5	14.08	38.5	-24.4		
		826.40	23.67	H	1.1	-1.5	21.06	38.5	-17.4		
		Mid Ch									
		836.60	16.68	V	1.1	-1.4	14.19	38.5	-24.3		
		836.60	23.70	H	1.1	-1.4	21.21	38.5	-17.2		
		High Ch									
		846.60	15.42	V	1.1	-1.3	13.04	38.5	-25.4		
		846.60	24.01	H	1.1	-1.3	21.63	38.5	-16.8		
		Rev. 3.17.11									

WCDMA Band 5 HSDPA		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2									
		Company: Samsung Project #: 4787821324 Date: 01-16-17 Test Engineer: Chan Park Configuration: EUT ONLY, X Position Mode: HSDPA_850 MHz  <u>Test Equipment:</u> Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
		Low Ch									
		826.40	14.52	V	1.1	-1.5	11.91	38.5	-26.5		
		826.40	22.51	H	1.1	-1.5	19.90	38.5	-18.6		
		Mid Ch									
		836.60	14.57	V	1.1	-1.4	12.08	38.5	-26.4		
		836.60	22.16	H	1.1	-1.4	19.67	38.5	-18.8		
		High Ch									
		846.60	13.44	V	1.1	-1.3	11.06	38.5	-27.4		
		846.60	22.10	H	1.1	-1.3	19.72	38.5	-18.7		
		Rev. 3.17.11									

**WCDMA Band 2**

WCDMA Band 2 REL99		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2									
		Company: Samsung Project #: 4787821324 Date: 01-19-17 Test Engineer: JH Park Configuration: EUT ONLY, X Position Mode: REL99_1900 MHz  <u>Test Equipment:</u> Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
		Low Ch									
		1852.40	14.73	V	1.60	8.79	21.92	33.0	-11.1		
		1852.40	14.41	H	1.60	8.79	21.60	33.0	-11.4		
		Mid Ch									
		1880.00	15.82	V	1.62	8.62	22.82	33.0	-10.2		
		1880.00	15.73	H	1.62	8.62	22.73	33.0	-10.3		
		High Ch									
		1907.60	15.26	V	1.63	8.45	22.08	33.0	-10.9		
		1907.60	13.96	H	1.63	8.45	20.78	33.0	-12.2		
		Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
WCDMA Band 2 HSDPA		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2									
		Company: Samsung Project #: 4787821324 Date: 01-19-17 Test Engineer: JH Park Configuration: EUT ONLY, X Position Mode: HSDPA_1900 MHz  <u>Test Equipment:</u> Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
		Low Ch									
		1852.40	13.82	V	1.60	8.79	21.01	33.0	-12.0		
		1852.40	13.28	H	1.60	8.79	20.47	33.0	-12.5		
		Mid Ch									
		1880.00	14.61	V	1.62	8.62	21.61	33.0	-11.4		
		1880.00	14.70	H	1.62	8.62	21.70	33.0	-11.3		
		High Ch									
		1907.60	14.10	V	1.63	8.45	20.92	33.0	-12.1		
		1907.60	12.96	H	1.63	8.45	19.78	33.0	-13.2		
		Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

**LTE Band 5**

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 5 10MHz QPSK	<b>Company:</b> Samsung <b>Project #:</b> 4787821324 <b>Date:</b> 01-19-17 <b>Test Engineer:</b> JH Park <b>Configuration:</b> EUT ONLY, X Position <b>Mode:</b> TX, LTE BAND 5, 10MHz BW, QPSK								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	829.00	14.09	V	1.1	-1.5	11.51	38.5	-26.9	
	829.00	22.74	H	1.1	-1.5	20.16	38.5	-18.3	
	Mid Ch								
	836.50	13.45	V	1.1	-1.4	10.96	38.5	-27.5	
	836.50	22.68	H	1.1	-1.4	20.19	38.5	-18.3	
	High Ch								
	844.00	13.20	V	1.1	-1.3	10.81	38.5	-27.6	
	844.00	22.57	H	1.1	-1.3	20.15	38.5	-18.3	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
	LTE Band 5 10MHz 16QAM	<b>Company:</b> Samsung <b>Project #:</b> 4787821324 <b>Date:</b> 01-19-17 <b>Test Engineer:</b> JH Park <b>Configuration:</b> EUT ONLY, X Position <b>Mode:</b> LTE5 10MHz FUND 16QAM							
<b>Test Equipment:</b> Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.									
f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch									
829.00		13.04	V	1.1	-1.5	10.46	38.5	-28.0	
829.00		21.66	H	1.1	-1.5	19.08	38.5	-19.4	
Mid Ch									
836.50		12.41	V	1.1	-1.4	9.90	38.5	-28.5	
836.50		21.60	H	1.1	-1.4	19.09	38.5	-19.4	
High Ch									
844.00		12.10	V	1.1	-1.3	9.68	38.5	-28.8	
844.00		21.49	H	1.1	-1.3	19.07	38.5	-19.4	
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									