


**802.11n\_HT40\_Lowest Channel (5 755 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu V$ ))	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
<b>Peak data</b>								
5 719.88	H	64.50	33.32	-26.63	-	71.19	110.80	39.61
11 578.78 <sup>1)</sup>	V	52.10	38.44	-41.97	-	48.57	74.00	25.43
17 286.62	H	49.70	38.27	-37.24	-	50.73	68.20	17.47
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


**802.11n\_HT40\_Highest Channel (5 795 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu V$ ))	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
<b>Peak data</b>								
5 866.27	V	47.60	33.87	-26.34	-	55.13	107.60	52.47
11 606.00 <sup>1)</sup>	V	51.40	38.39	-41.89	-	47.90	74.00	26.10
17 276.27	V	49.70	38.25	-37.23	-	50.72	68.20	17.48
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

**802.11n\_HT40\_Lowest Channel (5 755 MHz)**

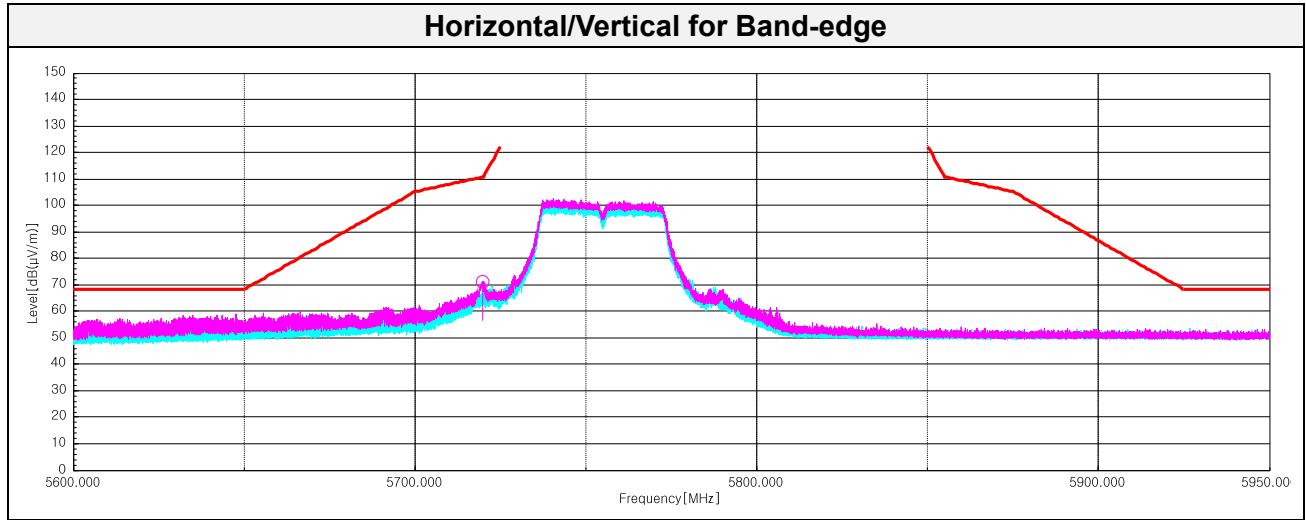

**802.11n\_HT40\_Highest Channel (5 795 MHz)**

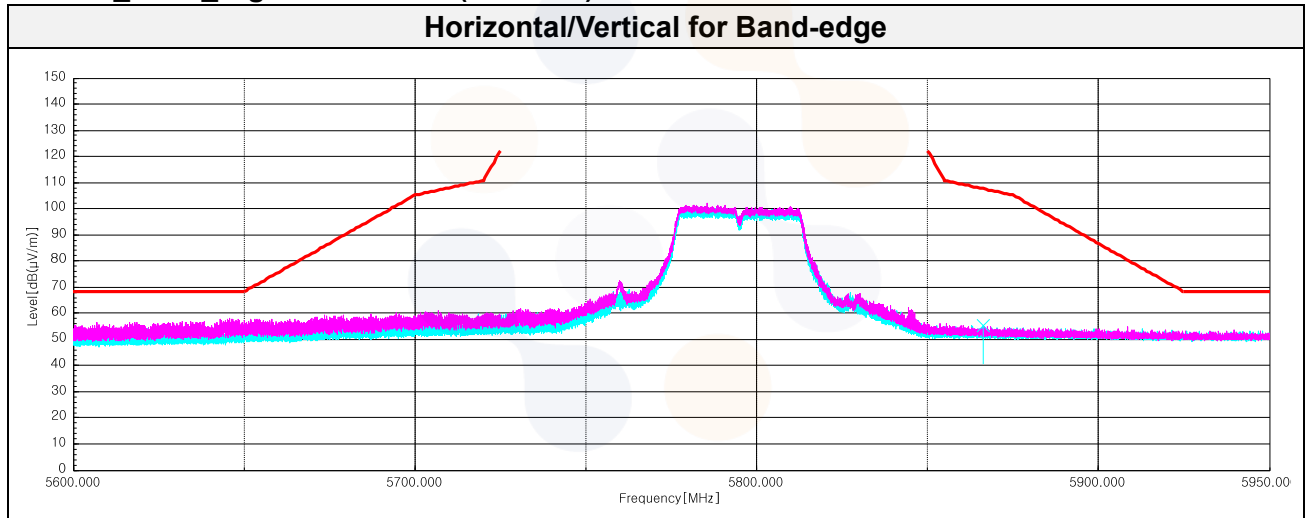

**802.11ac\_VHT20\_Lowest Channel (5 745 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
5 719.02	H	57.20	33.31	-26.63	-	63.88	110.50	46.62
11 443.08 <sup>1)</sup>	H	52.10	38.70	-42.17	-	48.63	74.00	25.37
17 170.08	H	50.00	37.86	-37.34	-	50.52	68.20	17.68
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


**802.11ac\_VHT20\_Middle Channel (5 785 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
11 612.13 <sup>1)</sup>	H	51.90	38.38	-41.87	-	48.41	74.00	25.59
17 325.33	V	49.00	38.35	-37.26	-	50.09	68.20	18.11
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


**802.11ac\_VHT20\_Highest Channel (5 825 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
5 866.18	H	50.50	33.86	-26.34	-	58.02	107.70	49.68
11 563.83 <sup>1)</sup>	H	51.80	38.47	-42.01	-	48.26	74.00	25.74
17 444.93	H	47.30	38.98	-37.31	-	48.97	68.20	19.23
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

**802.11ac\_VHT20\_Lowest Channel (5 745 MHz)**

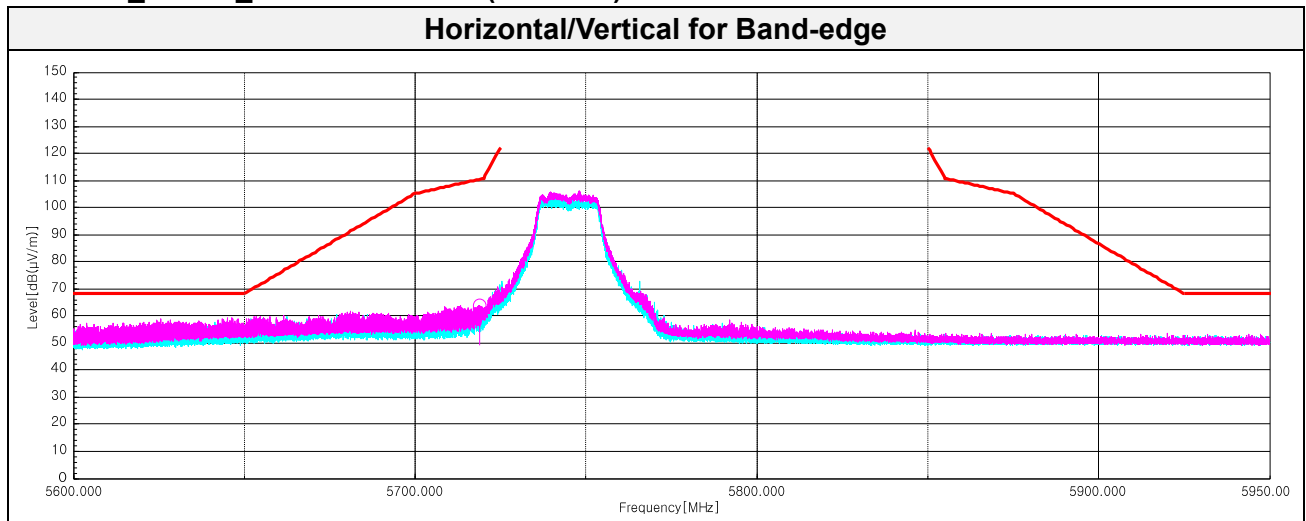

**802.11ac\_VHT20\_Highest Channel (5 825 MHz)**

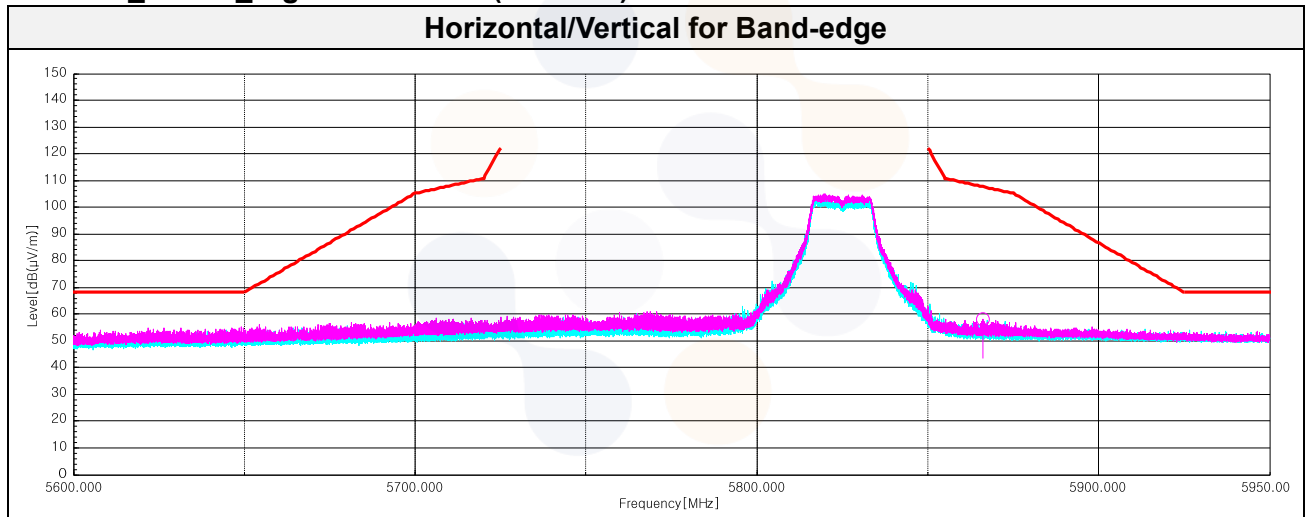


**802.11ac\_VHT40\_Lowest Channel (5 755 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 719.78	H	61.90	33.32	-26.63	-	68.59	110.70	42.11
11 418.93 <sup>1)</sup>	V	52.20	38.70	-42.16	-	48.74	74.00	25.26
17 246.75	H	49.60	38.29	-37.23	-	50.66	68.20	17.54
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


**802.11ac\_VHT40\_Highest Channel (5 795 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
5 862.48	H	48.10	33.85	-26.34	-	55.61	108.70	53.09
11 617.50 <sup>1)</sup>	H	51.80	38.37	-41.85	-	48.32	74.00	25.68
17 255.57	H	49.80	38.21	-37.22	-	50.79	68.20	17.41
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

### 802.11ac\_VHT40\_Lowest Channel (5 755 MHz)

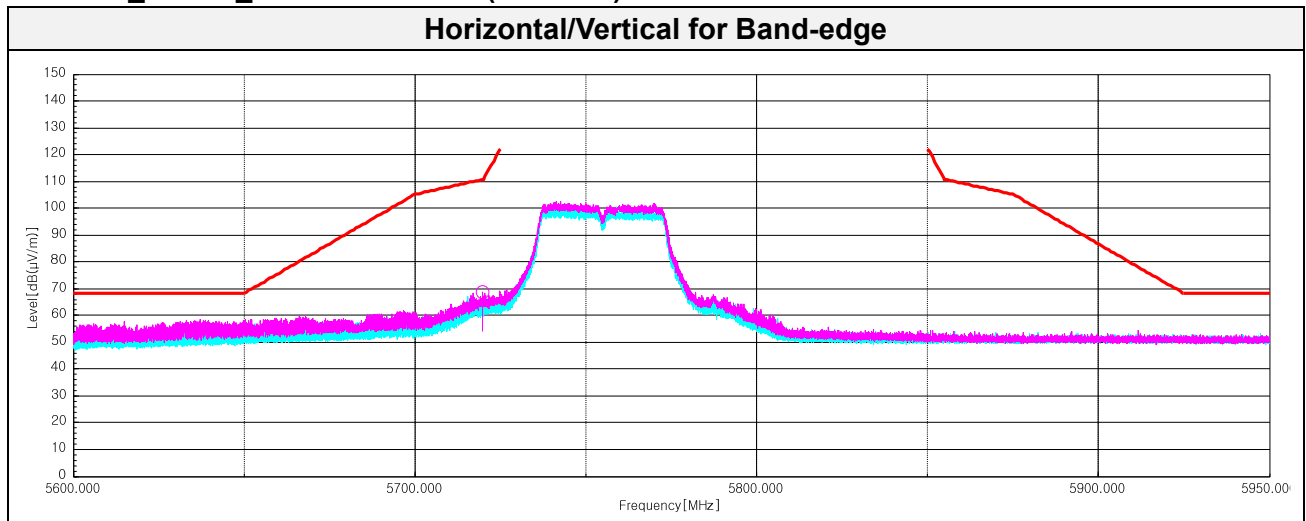


### 802.11ac\_VHT40\_Highest Channel (5 795 MHz)

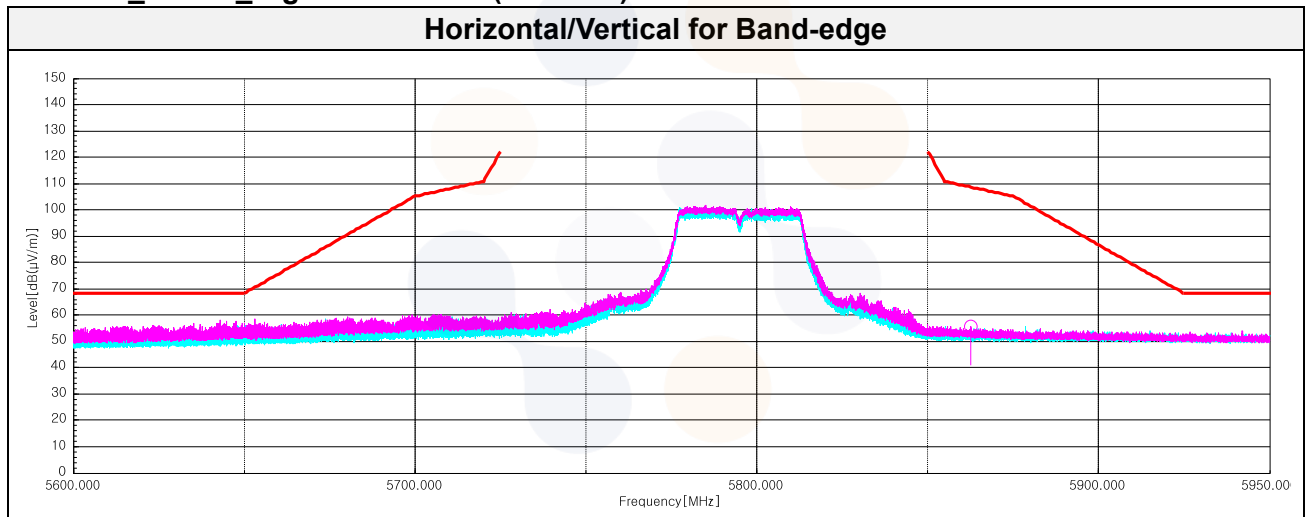

**802.11ac\_VHT80\_Middle Channel (5 775 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
5 716.11	V	63.50	33.30	-26.63	-	70.17	109.70	39.53
5 860.82	V	50.60	33.84	-26.35	-	58.09	109.20	51.11
11 545.82 <sup>1)</sup>	V	52.50	38.51	-42.06	-	48.95	74.00	25.05
17 221.45	H	49.70	38.19	-37.26	-	50.63	68.20	17.57
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

**Horizontal/Vertical for Band-edge**

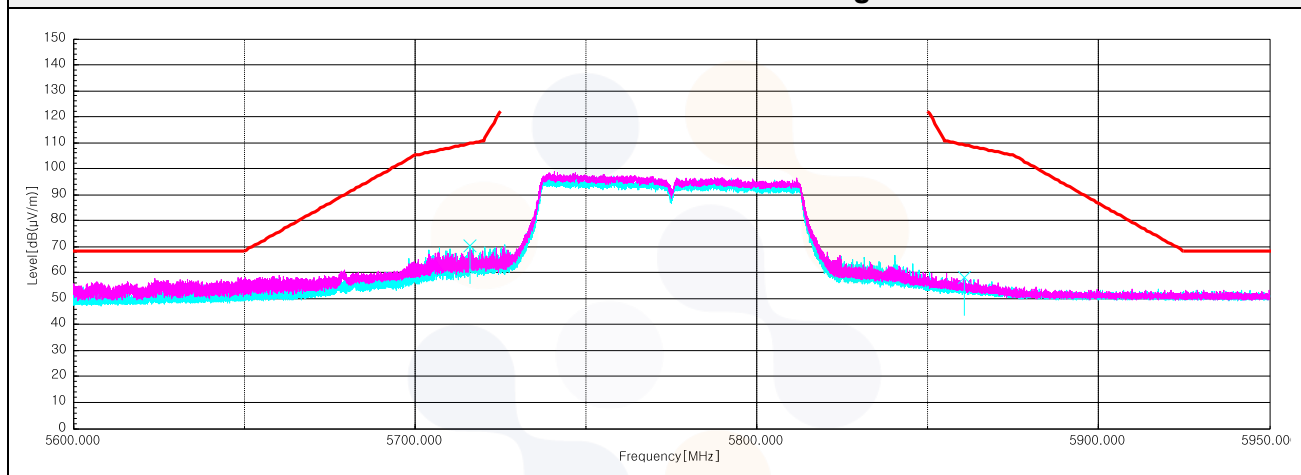


### Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

#### 802.11n HT20\_UNII-3\_2TX MIMO\_Low Channel (5 745 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

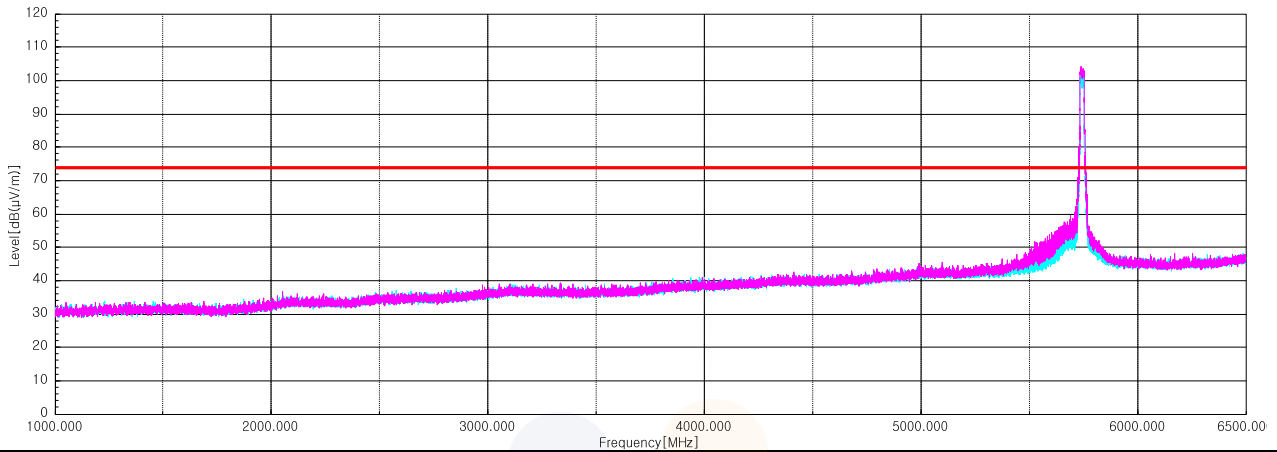

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

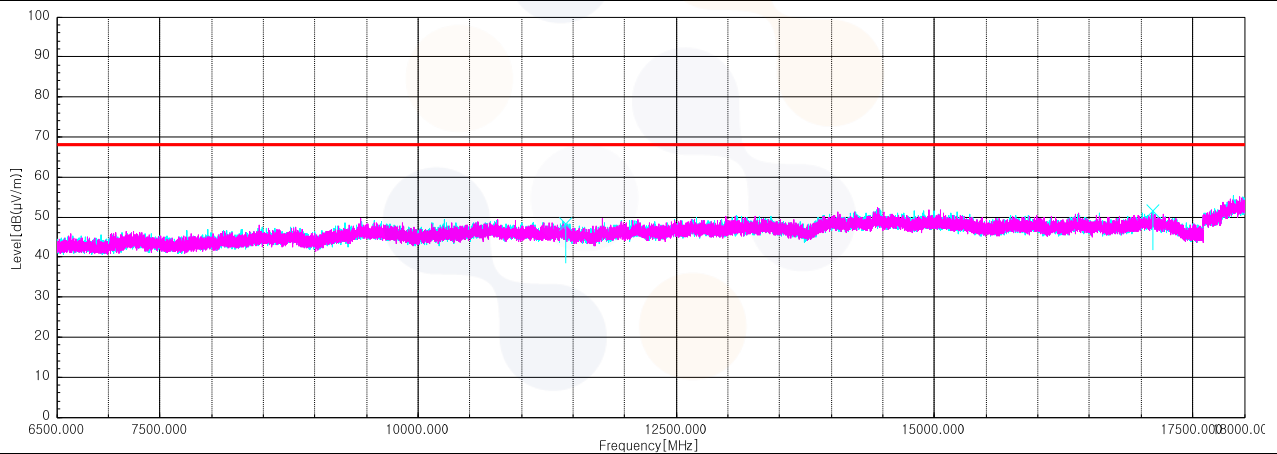


Horizontal/Vertical for 18 GHz ~ 40 GHz

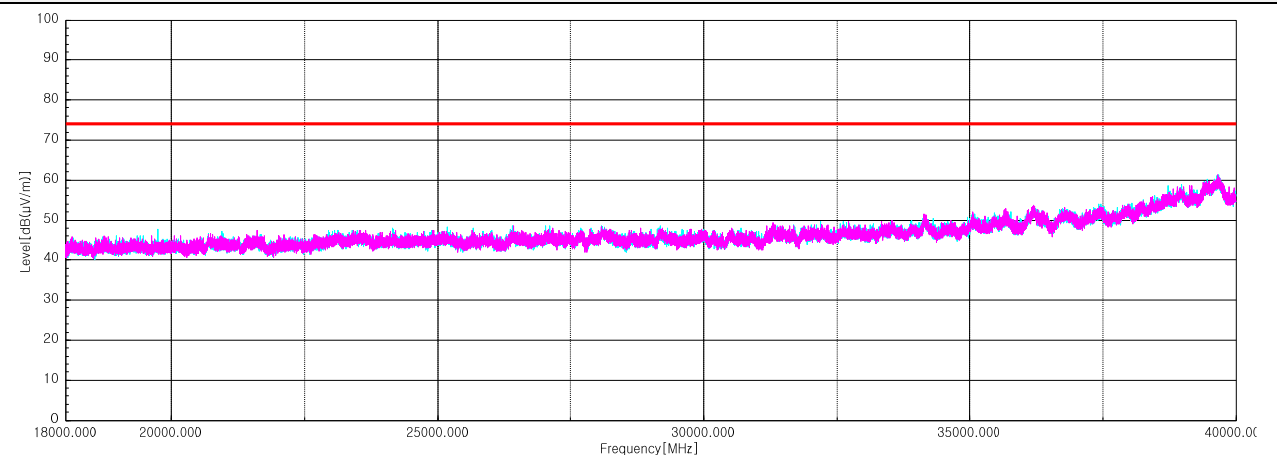



## 7.7. AC Conducted emission

### Test setup

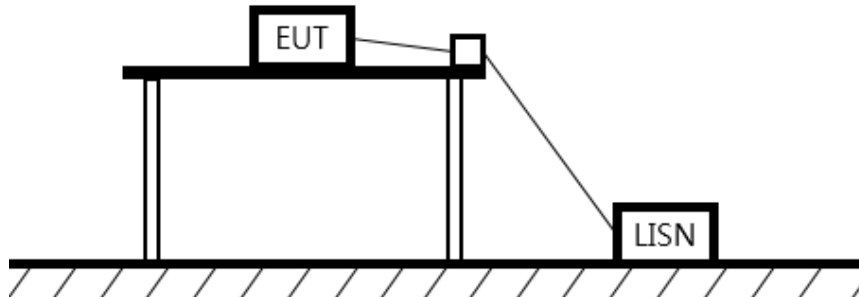

### Limit

#### §15.407

According to 15.207(a) and RSS-Gen (8.8), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

### Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

**Test results**

**Worst case: 802.11a 2TX MIMO / UNII-1\_5 200 MHz**

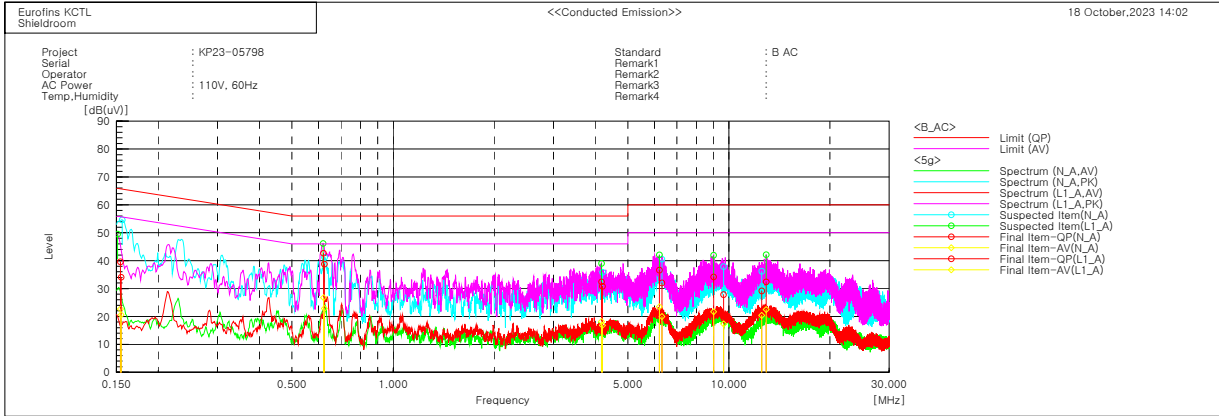

Final Result

--- N_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.1543	29.7	12.8	9.9	39.6	22.7	65.8	55.8	26.2	33.1
2	0.62439	28.8	12.9	9.9	38.7	22.8	56.0	46.0	17.3	23.2
3	4.20212	21.0	7.0	9.8	30.8	16.8	56.0	46.0	25.2	29.2
4	6.31668	22.1	10.1	9.9	32.0	20.0	60.0	50.0	28.0	30.0
5	9.64521	17.4	6.9	10.4	27.8	17.3	60.0	50.0	32.2	32.7
6	12.52143	18.6	9.9	10.5	29.1	20.4	60.0	50.0	30.9	29.6

--- L1_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15494	24.2	10.7	9.9	34.1	20.6	65.7	55.7	31.6	35.1
2	0.62061	32.8	16.8	9.9	42.7	26.7	56.0	46.0	13.3	19.3
3	4.17383	22.6	8.4	9.8	32.4	18.2	56.0	46.0	23.6	27.8
4	6.20998	26.7	13.6	9.9	36.6	23.5	60.0	50.0	23.4	26.5
5	9.00425	23.9	11.4	10.3	34.2	21.7	60.0	50.0	25.8	28.3
6	12.91354	21.8	11.9	10.6	32.4	22.5	60.0	50.0	27.6	27.5

## 8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100806	24.07.03
Spectrum Analyzer	R&S	FSV40	100988	24.07.03
PSA Spectrum Analyzer	Agilent	E4440A	MY44303500	24.07.04
EMI TEST RECEIVER	R&S	ESCI3	100001	24.08.18
Attenuator	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	0002	24.04.25
Attenuator	API Inmet	40AH2W-10	13	24.05.03
DC Power Supply	AGILENT	E3632A	MY40000265	24.04.27
Power Sensor	R&S	NRP-Z81	1137.9009.02- 106223-bB	24.04.25
Vector Signal Generator	R&S	SMBV100A	257566	24.07.04
Signal Generator	R&S	SMB100A	176206	24.01.19
Low Noise Amplifier	TESTEK	TK-PA18H	220123-L	24.10.12*
Low Noise Amplifier	TESTEK	TK-PA1840H	220234-L	24.10.17*
Amplifier	SONOMA INSTRUMENT	310N	421910	24.10.18*
Horn Antenna	SCHWARZBECK	BBHA9120D	2764	24.10.16*
Horn Antenna	SCHWARZBECK	BBHA9170	1266	24.11.17**
Bilog Antenna	Teseq GmbH	CBL 6112D	61521	24.08.10
Loop Antenna	R&S	HFH2-Z2	100355	24.08.10
High Pass Filter	Wainwright Instruments GmbH	WHKX8-5655-6500- 18000-40SS	SN7	24.10.16*
High Pass Filter	Qotana	DBHF058004000A	23041800061	24.07.10
TWO-LINE V - NETWORK	R&S	ENV216	101358	24.09.27*
Controller	INNCO SYSTEMS	CO3000	1441/54370322/P	-
Antenna Mast	INNCO SYSTEMS	MA4640-XP-ET	-	-
Turn Device	INNCO SYSTEMS	DS1200-S-1t	-	-

\*This equipment was calibrated during the test period, and was used after calibration.

\*\*This equipment was calibrated during the test period, and was used before calibration.

**End of test report**