

FCC WPT REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Rep. of Korea

Date of Issue:
May 17, 2023

Test Site/Location:
74, Seoicheon-ro 578 beon-gil, Majang-myeon, Icheon-
si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2305-FC044-R2

FCC ID: A3LSMX818U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-X818U

EUT Type: Tablet

Frequency Range: 531.25 kHz – 656.25 kHz

Max. Transmit Power: 19.80 dB μ V/m @30 m

FCC Classification: Part 15 Low Power Transmitter Below 1705 kHz (DCD)

FCC Rule Part(s): FCC Part 15, Subpart C (15.209)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2305-FC044-R2

REVIEWED BY



Report prepared by : Jin Gwan Lee
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC044	May 09, 2023	- First Approval Report
HCT-RF-2305-FC044-R1	May 15, 2023	- Added the Emission bandwidth on page 30
HCT-RF-2305-FC044-R2	May 17, 2023	<ul style="list-style-type: none">- Revised the frequency range on page 1.- Revised the frequency range on page 5.- Revised the mode of operation on page 5.- Revised the table of worst case on page 9.- Added the information of keyboard cover on page 9.- Revised the note on page 16 – 21.- Revised the table of test result on page 31.

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. WORST CASE CONFIGURATION	9
8. TEST SUMMARY	11
9. RADIATED EMISSION MEASUREMENT	12
10. POWERLINE CONDUCTED EMISSIONS.....	26
11. EMISSION BANDWIDTH PLOT	30
11. LIST OF TEST EQUIPMENT	33
12. Annex A_TEST SETUP PHOTO	34

1. EUT DESCRIPTION

Model	SM-X818U
Additional Model	-
EUT Type	Tablet
Power Supply	DC 3.88 V
Frequency Range	531.25 kHz – 656.25 kHz
Mode of Operation	<ol style="list-style-type: none">1. S-pen Charging (Main Coil): 531.25 kHz2. S-pen Charging (Sub Coil): 531.25 kHz3. S-pen Digitizer<ul style="list-style-type: none">- Button: 531.25 kHz- Writing, Hover: 562.50 kHz- Eraser: 593.75 kHz4. Keyboard cover detection: 656.25 kHz
Max. Transmit Power	19.80 dB μ V/m @30 m
Date(s) of Tests	March 13, 2023 ~ May 15, 2023
Serial number	Radiated: R32W2003JZY

2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.205, 15.207 and 15.209 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

7. WORST CASE CONFIGURATION

Mode	EUT State	Position of Client device	Battery of Client device	Client device
S-pen Charging (Main Coil, Sub Coil)	Charging from EUT to client device (Note 3)	Aligned	Non-fully charged condition	S-pen
	Charging from EUT(Charging from TA) to client device			

Mode	EUT State	Mode of client device	Client device
S-pen Digitizer	Stand alone	Button, Writing, Hover, Eraser	S-pen
	Stand alone + AC adapter		

Mode	EUT State	Client device
Keyboard cover detection	Stand alone	Keyboard cover
	Stand alone + AC adapter	

Note:

1. Client device(S-pen):
 - Model : EJ-PX710
 - Manufacturer : SAMSUNG
 - FCC ID: A3LEJPX710
2. Client device(Keyboard cover):
 - Model : EF-DX815
 - Manufacturer : SAMSUNG
3. All position of loop antenna were investigated and the worst position results are reported.
 - Position : Horizontal, Vertical, Parallel to the ground plane
 - Worst Position : Horizontal
4. Test results are not different between fully charged status and battery level 30% status(EUT condition), test were performed fully charged condition.

5. The EUT was tested in three orthogonal axis(X, Y, Z) and the worst position results are reported.

- Axis : X, Y, Z
- Worst Axis : Y, Z

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : EUT + External accessories(Earphone, Keyboard etc) + Travel Adapter + S-Pen(Client device),
EUT + Travel Adapter + S-Pen(Client device)
- Worstcase : EUT + Travel Adapter + S-Pen(Client device)

8. TEST SUMMARY

Test Description	FCC Rule	Limit	Condition	Result
Radiated emission	§15.209	cf. Section 9	Radiated	Pass
AC Power Line Conducted Emission	§15.207	cf. Section 10		Pass
Emission bandwidth.	§2.1049	<u>See note1</u>		<u>See note1</u>

Note:

1. For reporting purposes only.

9. RADIATED EMISSION MEASUREMENT

Test Settings

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest.
2. RBW :
 - 9 kHz – 150 kHz : 300 Hz
 - 150 kHz – 30 MHz : 10 kHz
 - 30 MHz – 1G Hz : 100 kHz
3. VBW : $\geq 3 \times$ RBW
4. Sweep time : Auto couple
5. Detector : Peak
6. Trace : Maxhold
7. Trace was allowed to stabilize

Limit


Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz) μ V/m@300 m
	0.490 ~1.705	24000/F(kHz) μ V/m@30 m
	1.705 ~ 30	30 μ V/m@30 m
	30 ~ 88	100 ** μ V/m@3 m
	88 ~ 216	150 ** μ V/m@3 m
	216 ~ 960	200 ** μ V/m@3 m
	Above 960	500 μ V/m@3 m


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Test Set-up

Below 30 MHz

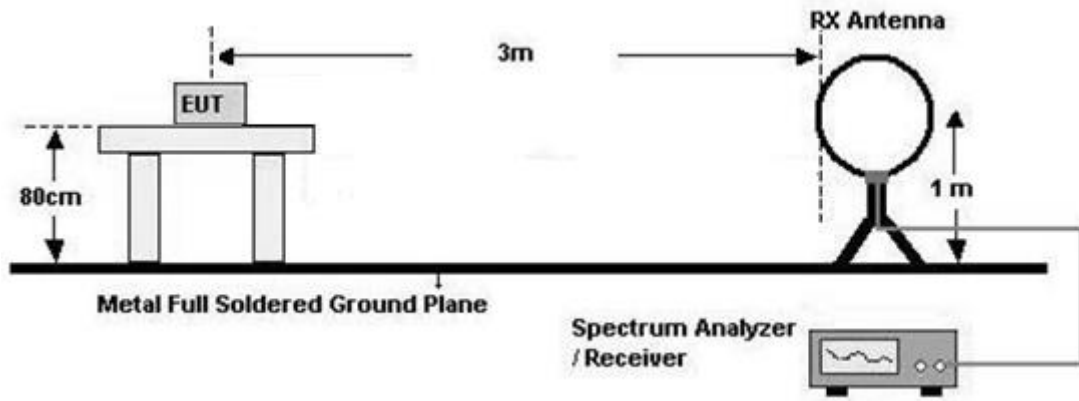

30 MHz - 1 GHz

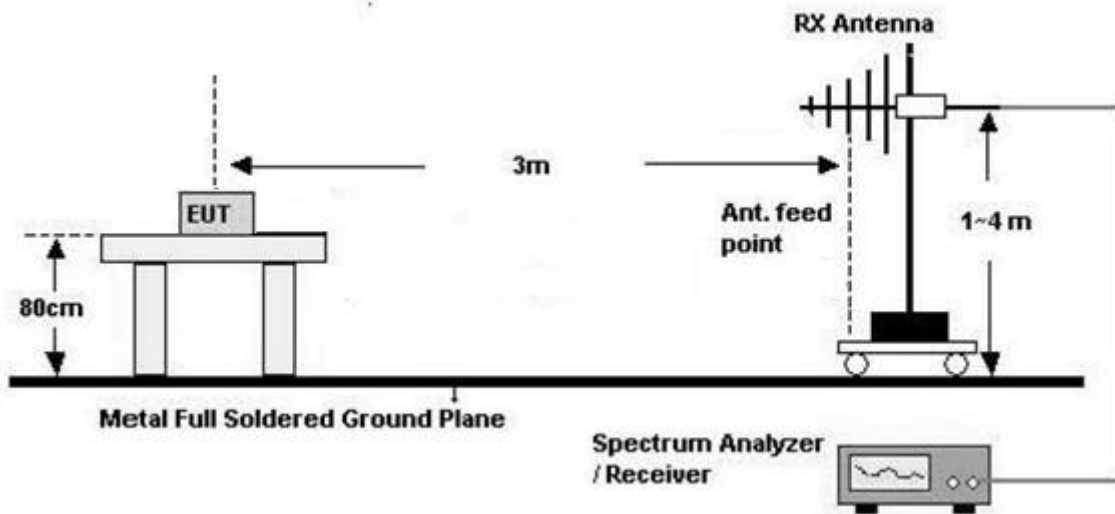

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT.
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:
 - * Result Value(dBμV/m@30 m)
 - = Measured Value(dBμV/m@3 m) + Ant factor(dB/m) + Cable Loss(dB)
 - Distance Correction Factor(dB)
6. Distance Correction
 - * 0.009 MHz – 0.490 MHz :
 - $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
 - * 0.490 MHz – 30 MHz :
 - $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
7. Plots were taken without using any correction factors.
8. The worst case plots are reported.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

■ Test Result (S-pen Digitizer)

Frequency (kHz)	Reading Level (dB μ V/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
19.219	35.64	19.2	0.45	-80.00	-24.71	41.93	66.64
163.5	29.45	19.5	0.56	-80.00	-30.49	23.33	53.82
# 531.25	28.16	19.5	0.55	-40.00	8.21	33.16	24.95
694.4	15.55	19.5	0.55	-40.00	-4.4	30.77	35.17

Note:

1. Mode: Button
2. "#": Fundamental Frequency
3. EUT state: Stand alone
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dB μ V/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
22.038	36.6	19.2	0.45	-80.00	-23.75	40.74	64.49
150.18	31.2	19.5	0.56	-80.00	-28.74	24.07	52.81
# 531.25	28.83	19.5	0.55	-40.00	8.88	33.09	24.21
831.3	17.71	19.5	0.65	-40.00	-2.14	29.21	31.35

Note:

1. Mode: Button
2. "#": Fundamental Frequency
3. EUT state: Stand alone + AC adapter
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dBµV/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
18.185	34.38	19.6	0.39	-80.00	-25.63	42.41	68.04
166.25	29.62	19.5	0.56	-80.00	-30.32	23.19	53.51
# 562.50	27.46	19.5	0.55	-40.00	7.51	32.59	25.08
694.4	17.24	19.5	0.55	-40.00	-2.71	30.77	33.48

Note:

1. Mode: Writing, Hover
2. "#": Fundamental Frequency
3. EUT state: Stand alone
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dBµV/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
19.219	35.22	19.6	0.39	-80.00	-24.79	41.93	66.72
151.26	29.41	19.5	0.56	-80.00	-30.53	24.01	54.54
# 562.50	27.99	19.5	0.55	-40.00	8.04	32.61	24.57
694.4	15.18	19.5	0.55	-40.00	-4.77	30.77	35.54

Note:

1. Mode: Writing, Hover
2. "#": Fundamental Frequency
3. EUT state: Stand alone + AC adapter
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dB μ V/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
19.454	35.83	19.6	0.39	-80.00	-24.18	41.82	66.00
167.33	28.80	19.5	0.56	-80.00	-31.14	23.13	54.27
# 593.75	26.94	19.5	0.55	-40.00	6.99	32.14	25.15
694.4	15.75	19.5	0.55	-40.00	-4.20	30.77	34.97

Note:

1. Mode: Eraser
2. "#": Fundamental Frequency
3. EUT state: Stand alone
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dB μ V/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
19.36	35.40	19.2	0.45	-80.00	-24.95	41.87	66.82
167.93	30.15	19.5	0.56	-80.00	-29.79	23.10	52.89
# 593.75	27.14	19.5	0.55	-40.00	7.19	32.14	24.95
704.2	15.19	19.5	0.65	-40.00	-4.66	30.65	35.31

Note:

1. Mode: Eraser
2. "#": Fundamental Frequency
3. EUT state: Stand alone + AC adapter
4. 30 MHz – 1GHz : No Critical peaks found

■ Test Result (Keyboard cover detection)

Frequency (kHz)	Reading Level (dB μ V/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
19.313	34.65	19.6	0.39	-80.00	-25.36	41.89	67.25
150.78	28.96	19.5	0.56	-80.00	-30.98	24.04	55.02
# 656.25	26.66	19.5	0.55	-40.00	6.71	31.27	24.56
674.9	15.88	19.5	0.55	-40.00	-4.07	31.02	35.09

Note:

1. Mode: Keyboard cover detection
2. "#": Fundamental Frequency
3. EUT state: Stand alone
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dB μ V/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
18.373	34.18	19.6	0.39	-80.00	-25.83	42.32	68.15
398.74	32.80	19.5	0.56	-80.00	-27.14	15.59	42.73
# 656.25	27.07	19.5	0.55	-40.00	7.12	31.25	24.13
674.9	17.42	19.5	0.55	-40.00	-2.53	31.02	33.55

Note:

1. Mode: Keyboard cover detection
2. "#": Fundamental Frequency
3. EUT state: Stand alone + AC adapter
4. 30 MHz – 1GHz : No Critical peaks found

■ Test Result (S-pen Charging (Main Coil))

Frequency (kHz)	Reading Level (dBμV/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
10.245	32.27	19.2	0.45	-80.00	-28.08	47.39	75.47
# 531.25	39.75	19.5	0.55	-40.00	19.80	33.11	13.31
23562.6	10.55	20.1	0.69	-40.00	-8.67	29.54	38.21

Note:

1. Mode: S-pen Charging
2. "#": Fundamental Frequency
3. EUT state: Charging from EUT to client device
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dBμV/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
39.093	36.02	19.6	0.39	-80.00	-23.99	35.76	59.75
# 531.25	38.22	19.5	0.55	-40.00	18.27	33.11	14.84
23013.8	10.46	20.1	0.69	-40.00	-8.76	29.54	38.30

Note:

1. Mode: S-pen Charging
2. "#": Fundamental Frequency
3. EUT state: Charging from EUT(Charging from TA) to client device
4. 30 MHz – 1GHz : No Critical peaks found

■ Test Result (S-pen Charging (Sub Coil))

Frequency (kHz)	Reading Level (dBμV/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
11.04	31.66	19.2	0.45	-80.00	-28.69	46.74	75.43
# 531.25	36.69	19.5	0.55	-40.00	16.74	33.11	16.37
27395.4	11.18	20.0	0.74	-40.00	-8.08	29.54	37.62

Note:

1. Mode: S-pen Charging
2. "#": Fundamental Frequency
3. EUT state: Charging from EUT to client device
4. 30 MHz – 1GHz : No Critical peaks found

Frequency (kHz)	Reading Level (dBμV/m)@3m	Ant.Factor (dB/m)	Cable Loss (dB)	Distance Correction (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
48.913	39.76	19.6	0.54	-80.00	-20.10	33.82	53.92
# 531.25	36.05	19.5	0.55	-40.00	16.10	33.11	17.01
29185.8	10.64	20.0	0.74	-40.00	-8.62	29.54	38.16

Note:

1. Mode: S-pen Charging
2. "#": Fundamental Frequency
3. EUT state: Charging from EUT(Charging from TA) to client device
4. 30 MHz – 1GHz : No Critical peaks found


Test Plot

In order to simplify the report, the worst case results are reported.

(Worst case: Keyboard cover detection, S-pen Charging(Main Coil))


Keyboard cover detection

Frequency Range : 9 kHz – 150 kHz

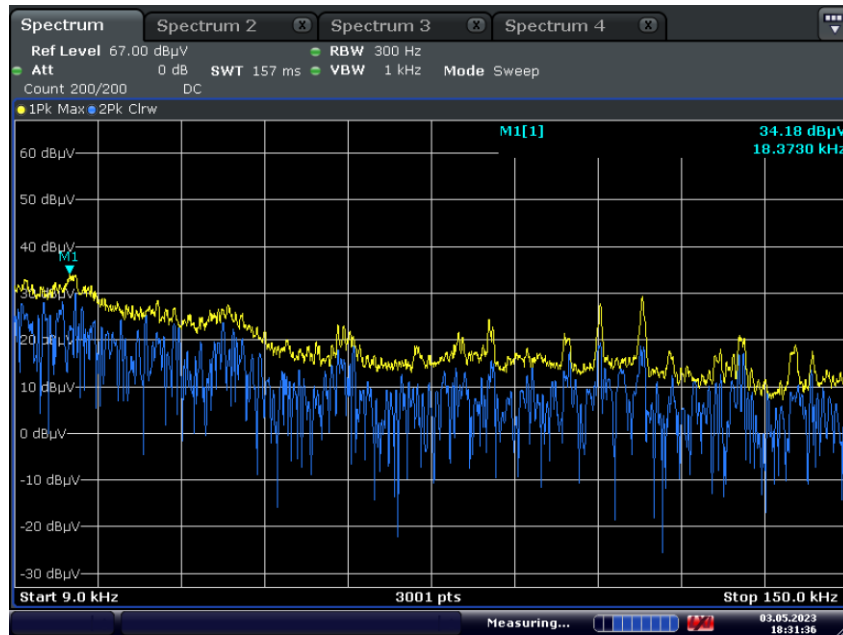


Date: 3.MAY.2023 18:31:36

Frequency Range : 150 kHz – 510 kHz

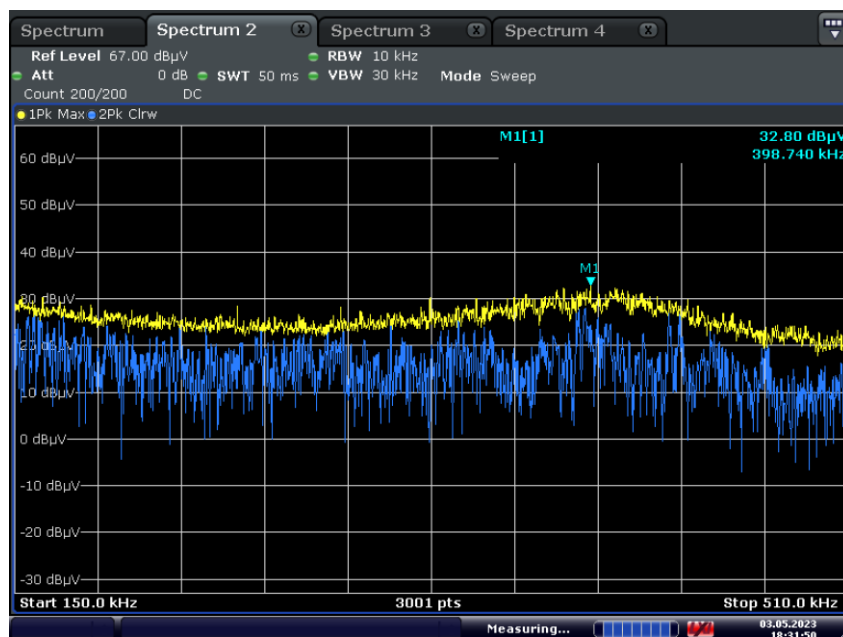


Date: 3.MAY.2023 18:31:51

Frequency Range : 510 kHz – 670 kHz

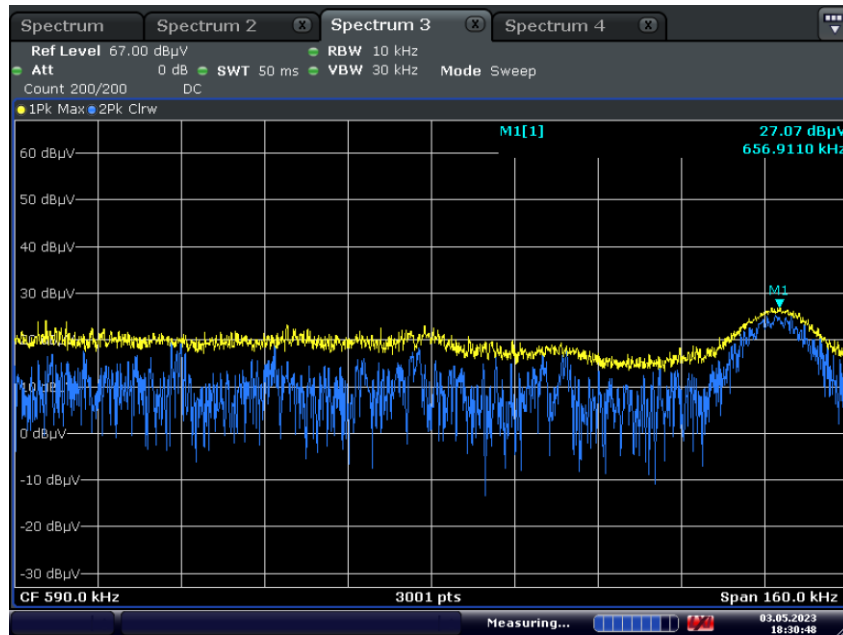

Date: 3.MAY.2023 18:30:49

Frequency Range : 670 kHz – 3 MHz

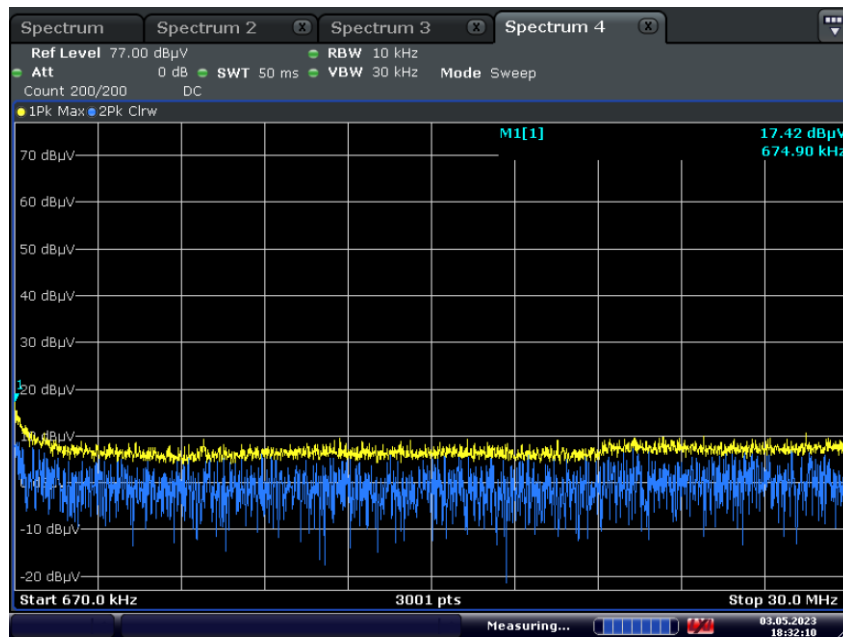


Date: 3.MAY.2023 18:32:10

Frequency Range : 30 MHz – 1 GHz
(30 MHz – 1GHz : No Critical peaks found)


S-pen Charging(Main Coil)

Frequency Range : 9 kHz – 150 kHz

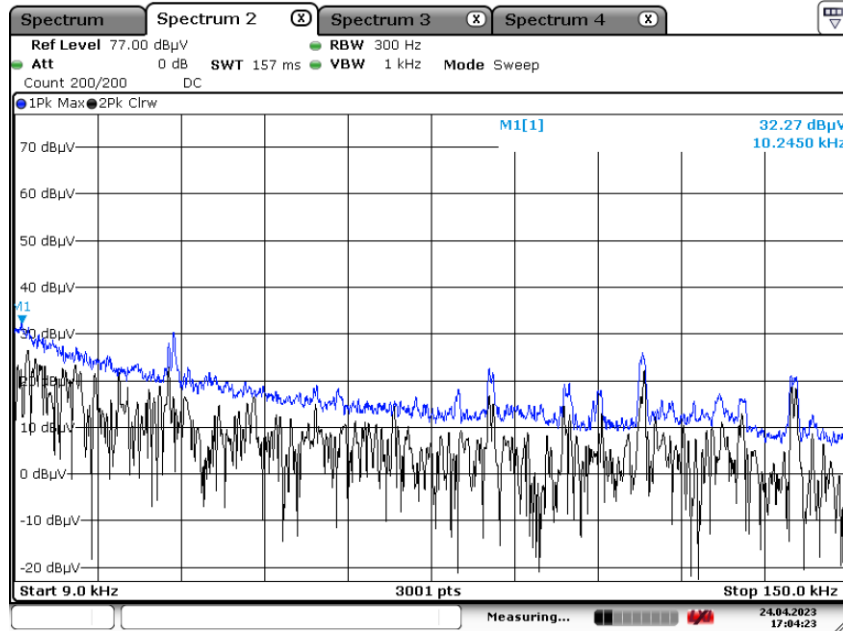


Date: 24.APR.2023 17:04:23

Frequency Range : 150 kHz – 3 MHz

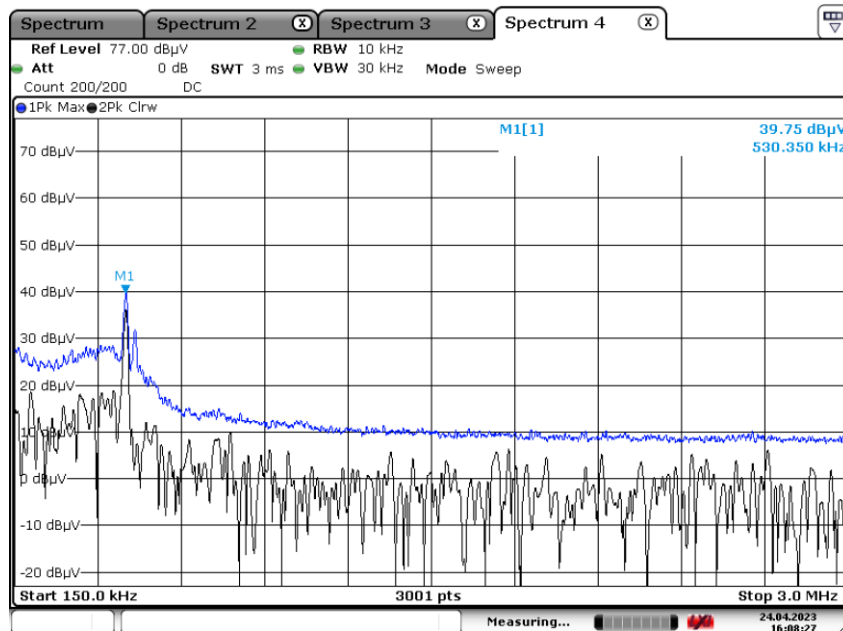

Date: 24.APR.2023 16:08:26

Frequency Range : 3 MHz – 30 MHz

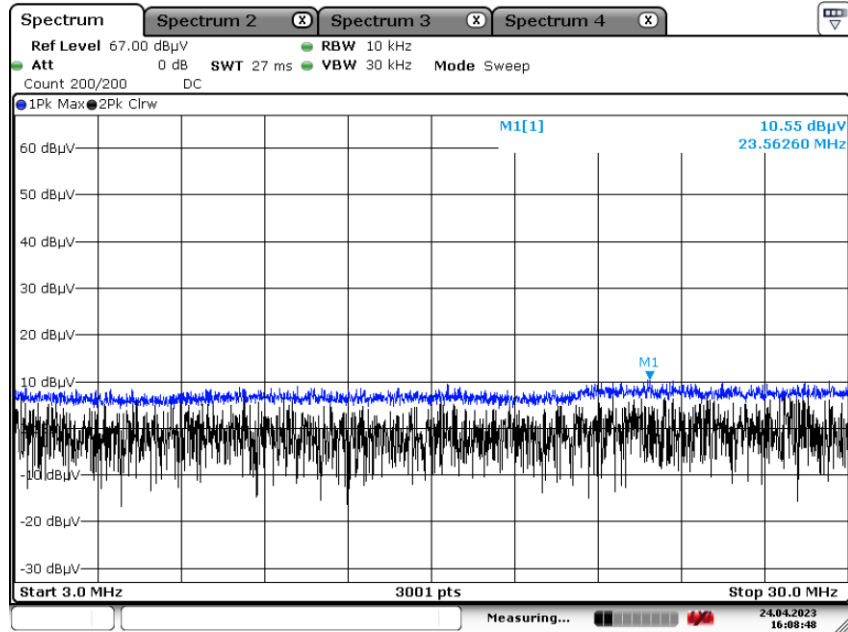

Date: 24.APR.2023 16:08:48

Frequency Range : 30 MHz – 1 GHz
(30 MHz – 1GHz : No Critical peaks found)

10. POWERLINE CONDUCTED EMISSIONS

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

■ **Test Result & Plot**

Mode: S-pen Charging

Test


1 / 2

Test Report

Common Information

EUT : SM-X818U
 Operating Conditions : S-PEN Charging Mode
 Comment :

Full Spectrum

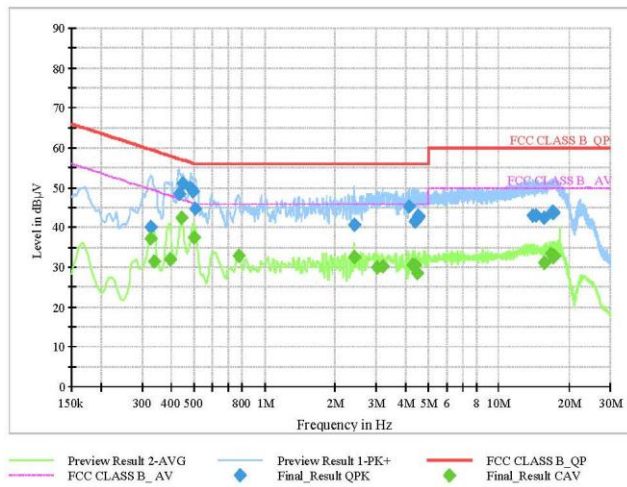

Final Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.3278	40.13	59.51	19.38	1000.0	9.000	L1	OFF	9.7
0.4313	48.58	57.23	8.65	1000.0	9.000	L1	OFF	9.7
0.4470	51.00	56.93	5.93	1000.0	9.000	L1	OFF	9.7
0.4853	49.94	56.25	6.31	1000.0	9.000	L1	OFF	9.7
0.4943	48.98	56.10	7.11	1000.0	9.000	L1	OFF	9.7
0.5068	44.64	56.00	11.36	1000.0	9.000	L1	OFF	9.7
2.4170	40.79	56.00	15.21	1000.0	9.000	L1	OFF	9.7
4.1495	45.18	56.00	10.82	1000.0	9.000	L1	OFF	9.8
4.3678	41.56	56.00	14.44	1000.0	9.000	L1	OFF	9.8
4.4645	42.09	56.00	13.91	1000.0	9.000	L1	OFF	9.8
4.5343	42.89	56.00	13.11	1000.0	9.000	L1	OFF	9.8
4.5388	42.65	56.00	13.35	1000.0	9.000	L1	OFF	9.8
13.8853	42.94	60.00	17.06	1000.0	9.000	L1	OFF	10.2
14.4860	42.97	60.00	17.03	1000.0	9.000	L1	OFF	10.2
15.6718	42.29	60.00	17.71	1000.0	9.000	L1	OFF	10.2
16.9048	43.75	60.00	16.25	1000.0	9.000	L1	OFF	10.3
17.0668	43.53	60.00	16.47	1000.0	9.000	L1	OFF	10.3
17.0735	43.71	60.00	16.29	1000.0	9.000	L1	OFF	10.3

2023-04-18

오전 3:50:17

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.3278	37.14	49.51	12.37	1000.0	9.000	L1	OFF	9.7
0.3368	31.47	49.28	17.81	1000.0	9.000	L1	OFF	9.7
0.3930	32.06	48.00	15.94	1000.0	9.000	L1	OFF	9.7
0.4403	42.31	47.06	4.75	1000.0	9.000	L1	OFF	9.7
0.4988	37.55	46.02	8.47	1000.0	9.000	L1	OFF	9.7
0.7790	32.98	46.00	13.02	1000.0	9.000	L1	OFF	9.7
2.4193	32.65	46.00	13.35	1000.0	9.000	L1	OFF	9.7
3.0065	29.89	46.00	16.11	1000.0	9.000	L1	OFF	9.8
3.1843	30.23	46.00	15.77	1000.0	9.000	L1	OFF	9.8
4.3048	30.55	46.00	15.45	1000.0	9.000	L1	OFF	9.8
4.3700	30.49	46.00	15.51	1000.0	9.000	L1	OFF	9.8
4.4578	28.62	46.00	17.38	1000.0	9.000	L1	OFF	9.8
15.6155	31.25	50.00	18.75	1000.0	9.000	L1	OFF	10.2
16.6415	33.46	50.00	16.54	1000.0	9.000	L1	OFF	10.2
16.6978	33.54	50.00	16.46	1000.0	9.000	L1	OFF	10.3
17.0375	32.70	50.00	17.30	1000.0	9.000	L1	OFF	10.3
17.0713	32.81	50.00	17.19	1000.0	9.000	L1	OFF	10.3
17.3233	32.99	50.00	17.01	1000.0	9.000	L1	OFF	10.3

2023-04-18

오전 3:50:17

Mode: Digitizer S-pen

Test


1 / 1

Test Report

Common Information

EUT : SM-X818U
Operating Conditions : Digitizer Mode
Comment :

Full Spectrum

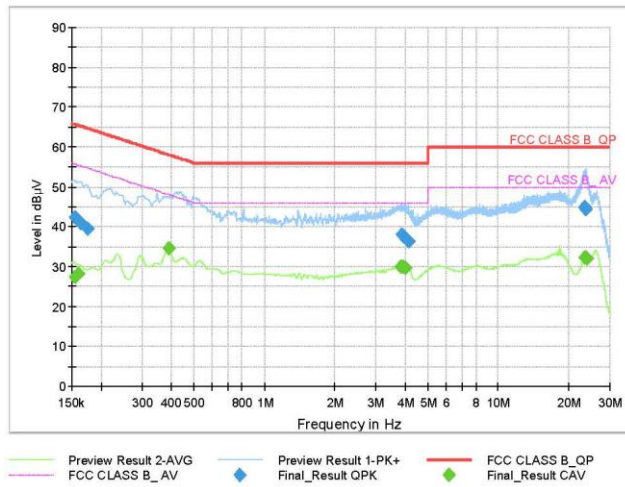

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	42.27	65.75	23.49	1000.0	9.000	L1	OFF	9.7
0.1635	41.08	65.28	24.20	1000.0	9.000	L1	OFF	9.7
0.1748	39.60	64.73	25.13	1000.0	9.000	L1	OFF	9.7
3.8525	38.13	56.00	17.87	1000.0	9.000	L1	OFF	9.8
3.9808	37.54	56.00	18.46	1000.0	9.000	L1	OFF	9.8
4.1428	36.47	56.00	19.53	1000.0	9.000	L1	OFF	9.8
23.4973	44.82	60.00	15.18	1000.0	9.000	L1	OFF	10.5
23.5130	44.86	60.00	15.14	1000.0	9.000	L1	OFF	10.5
23.6840	44.48	60.00	15.52	1000.0	9.000	L1	OFF	10.5

Final Result CAV

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	27.35	55.75	28.40	1000.0	9.000	N	OFF	9.6
0.1613	28.24	55.40	27.16	1000.0	9.000	L1	OFF	9.7
0.3908	34.53	48.05	13.52	1000.0	9.000	L1	OFF	9.7
3.8503	30.01	46.00	15.99	1000.0	9.000	L1	OFF	9.8
3.9335	29.94	46.00	16.06	1000.0	9.000	L1	OFF	9.8
3.9830	29.73	46.00	16.27	1000.0	9.000	L1	OFF	9.8
23.5130	32.43	50.00	17.57	1000.0	9.000	L1	OFF	10.5
23.5760	32.44	50.00	17.56	1000.0	9.000	L1	OFF	10.5
23.8235	32.04	50.00	17.96	1000.0	9.000	L1	OFF	10.5

2023-05-08

오후 7:36:24

11. EMISSION BANDWIDTH PLOT

Test Settings

1. Analyzer frequency set to the frequency of the radiated spurious emissipn of interst
2. RBW : 300 Hz
(Becasue the measured signal is CW/CW-like,adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.)
3. VBW : $\geq 3 \times$ RBW
4. Sweep time : Auto couple
5. Detector : Peak
6. Trace : Maxhold
7. Trace was allowed to stabilize

Limit

None


(for reporting purposes only.)

■ **Test Result**

Mode	Test Frequency (kHz)	Occupied Bandwidth (kHz)
S-pen Digitizer (Button)	531.25	13.056
S-pen Digitizer (Writing)	562.50	9.757
S-pen Digitizer (Eraser)	593.75	12.756
Keyboard cover detection	656.25	8.111
S-pen Charging (Sub Coil)	531.25	14.222
S-pen Charging (Main Coil)	531.25	14.115


■ **Test Plot**

S-pen Charging (Sub Coil)

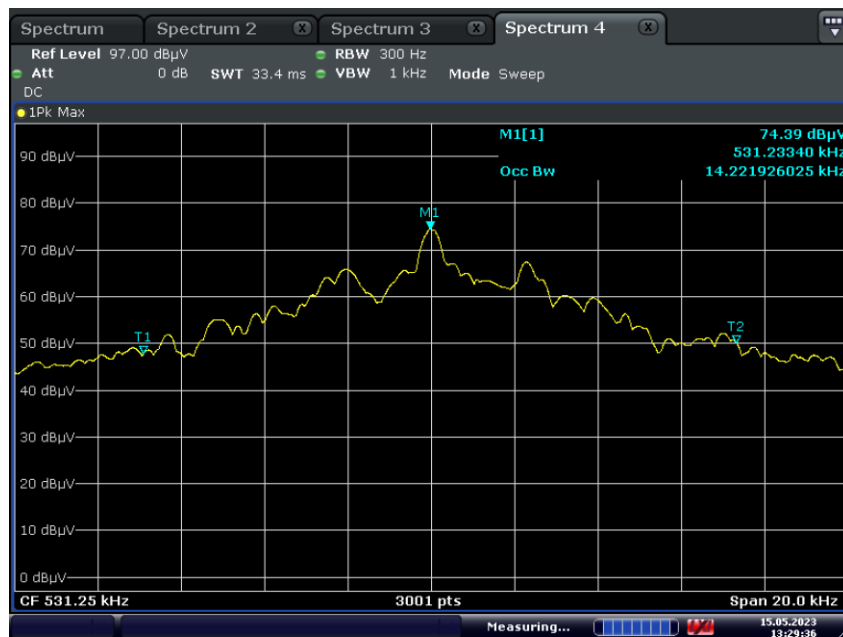

Date: 15.MAY.2023 13:29:36

Keyboard cover detection

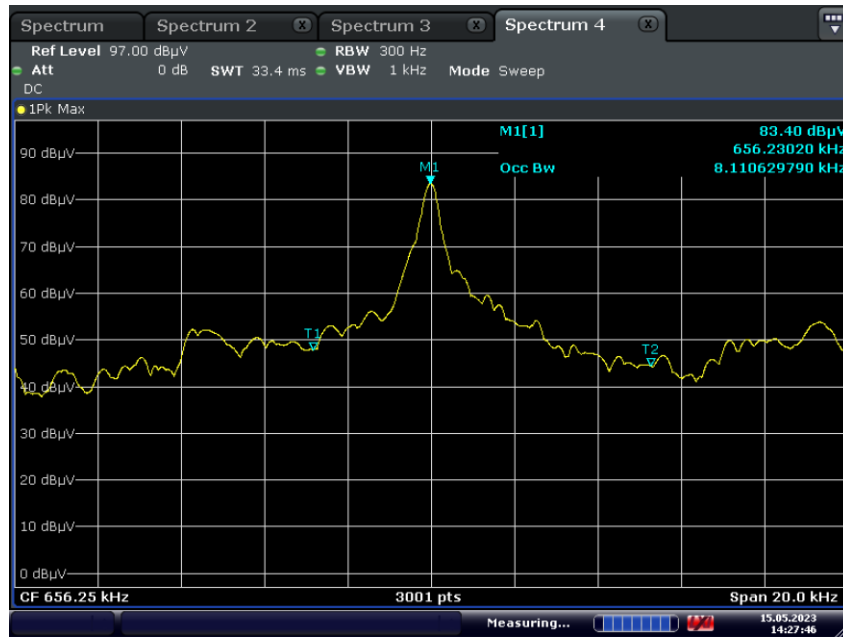

Date: 15.MAY.2023 14:27:47

Note:

In order to simplify the report, the worst case results are reported.

11. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/06/2023	Annual
Spectrum Analyzer	FSV40-N(9 kHz ~ 30 GHz)	Rohde & Schwarz	101068-SZ	09/07/2023	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEX	N/A	12/05/2023	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/05/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. Annex A TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC044-P