




PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 27 Class II Permissive Change

Applicant Name:
Samsung Electronics, Co. Ltd.
18600 Broadwick St.
Rancho Dominguez, CA 90220
United States

Date of Testing:
April 10 - 11, 2008
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0803270373.A3L

FCC ID:	A3LSWCE100
APPLICANT:	SAMSUNG ELECTRONICS, CO. LTD.

Application Type: Class II Permissive Change
FCC Classification: Licensed Non-Broadcast Transmitter (TNB)
FCC Rule Part(s): §2; §27 Subpart M
EUT Type: WiMAX Data Card
Model(s): SWC-E100
Tx Frequency Range: 2498.5 - 2687.5MHz (WiMAX using 5MHz BW)
Max. RF Output Power: 0.159 W EIRP WiMAX (22.02 dBm) (16QAM)
0.153 W EIRP WiMAX (21.84 dBm) (QPSK)
Emission Designator(s): 4M71G7D (QPSK) / 4M70W7D (16QAM)
Test Device Serial No.: *identical prototype [S/N: FF-052-A]*
Class II Perm. Change: Please see Samsung documents for changes
Original Grant Date: 10/29/2007

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is EIRP for Part 27.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President








FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 1 of 22	

TABLE OF CONTENTS


FCC PART 27 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION		4
1.1 MEASUREMENT PROCEDURE		4
1.2 SCOPE		4
1.3 TESTING FACILITY		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.3 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS		6
3.1 OCCUPIED BANDWIDTH EMISSION LIMITS		6
3.2 EBS/BRS - FREQUENCY BLOCKS		6
3.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		7
3.4 RADIATED SPURIOUS AND HARMONIC EMISSIONS		7
3.5 FREQUENCY STABILITY / TEMPERATURE VARIATION		7
4.0 TEST EQUIPMENT CALIBRATION DATA		8
5.0 SAMPLE CALCULATIONS		9
6.0 TEST RESULTS		10
6.1 SUMMARY.....		10
6.2 TRANSMITTER CONDUCTED OUTPUT POWER		11
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....		12
6.4 WIMAX RADIATED MEASUREMENTS.....		13
6.5 WIMAX FREQUENCY STABILITY MEASUREMENTS		16
7.0 PLOT(S) OF EMISSIONS		18
8.0 CONCLUSION.....		22

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 2 of 22



MEASUREMENT REPORT

FCC Part 27




§2.1033 General Information



APPLICANT: Samsung Electronics, Co. Ltd.
APPLICANT ADDRESS: 18600 Broadwick St.
 Rancho Dominguez, CA 90220
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §27(M)
BASE MODEL: SWC-E100
FCC ID: A3LSWCE100
FCC CLASSIFICATION: Licensed Non-Broadcast Transmitter (TNB)
EMISSION DESIGNATOR(S): 4M71G7D (QPSK) / 4M70W7D (16QAM)
MODE: WiMAX
FREQUENCY TOLERANCE: Emission must remain in band
Test Device Serial No.: FF-052-A Production Pre-Production Engineering
DATE(S) OF TEST: April 10 - 11, 2008
TEST REPORT S/N: 0803270373.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.




FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 3 of 22	

1.0 INTRODUCTION

1.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 1-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

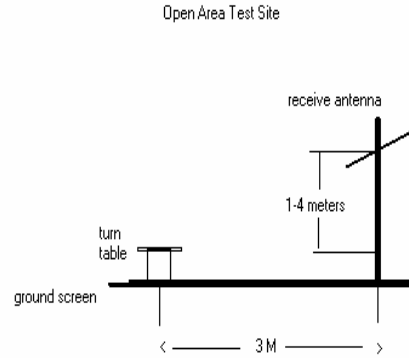

Deviation from Measurement Procedure.....None

Figure 1-1. Diagram of 3-meter outdoor test range

1.2 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 Testing Facility

These measurements were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

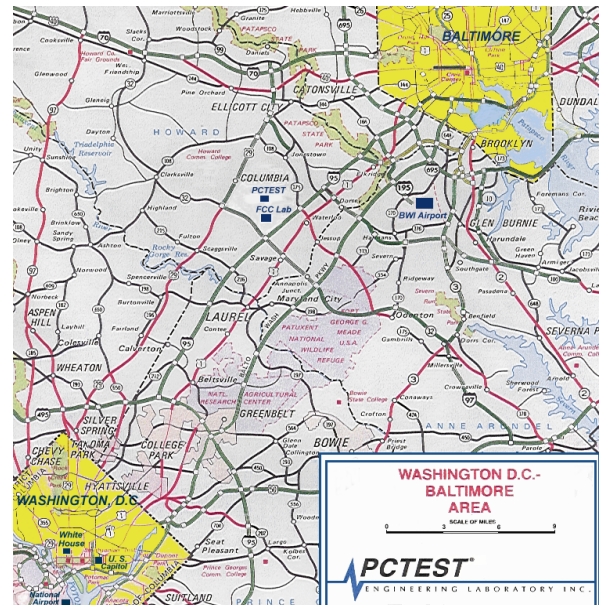


Figure 1-2. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 4 of 22

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung WiMAX Data Card FCC ID: A3LSWCE100**. The test data contained in this report pertains only to the emissions due to the EUT's WiMAX function. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Samsung / Model: SWC-E100	A3LSWCE100	WiMAX Data Card

Table 2-1. EUT Equipment Description

The EUT was set to transmit at full power through test software installed in a laptop computer. Each of the four available types of modulations was tested to determine the configuration producing the worst case emissions. An external trigger was used so that all measurements were made during the transmitters "on" period.

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.3 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 5 of 22	

3.0 DESCRIPTION OF TESTS


3.1 Occupied Bandwidth Emission Limits

§2.1049, §27.53(l)(6)

- a. On any frequency outside but within 5.5MHz from the band edge of a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. At frequencies greater than 5.5MHz from any in-band channel edge, the transmitter power (P) shall be attenuated by at least $55 + 10 \log(P)$ dB.
- b. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- c. When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- d. The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.2 EBS/BRS - Frequency Blocks

§27.5(i)

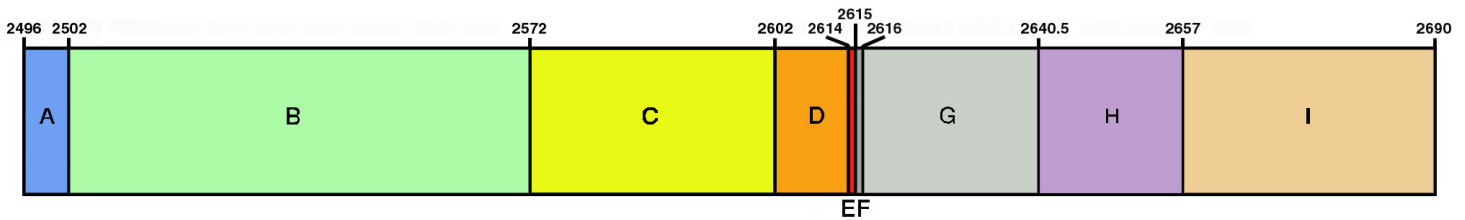

**BLOCK A: 2496MHz – 2502MHz
(BRS)**

**BLOCK B: 2502MHz – 2572MHz
(EBS)**

**BLOCK C: 2572MHz – 2602MHz
(EBS)**

**BLOCK D: 2602MHz – 2614MHz
(BRS)**



**BLOCK E: 2614MHz – 2615MHz
(BRS)**

**BLOCK F: 2615MHz – 2616MHz
(EBS)**

**BLOCK G: 2616MHz – 2640.5MHz
(BRS)**

**BLOCK H: 2640.5MHz – 2657MHz
(EBS)**

**BLOCK A: 2657MHz – 2690MHz
(BRS)**

FCC ID: A3LSWCE100	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 6 of 22	

3.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §27.53(l)(4)(6)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

3.4 Radiated Spurious and Harmonic Emissions

§2.1053, §27.53(l)(4)(6)

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all configurations and the worst case is reported with BAMC 16QAM modulation.

3.5 Frequency Stability / Temperature Variation

§2.1055, §27.54



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.



FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 7 of 22	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	8648D (9kHz-4GHz) Signal Generator	10/11/07	Biennial	10/10/09	3613A00315
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	E4448A (3Hz-50GHz) Spectrum Analyzer	10/01/07	Annual	10/01/08	US42510244
Agilent	E6651A Mobile WiMAX Tester	08/23/07	Biennial	08/22/09	MY47310109
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/08/07	Biennial	03/08/09	MY45470194
Agilent	HP 11713A Attenuation/Switch Driver	12/13/07	Annual	12/13/08	3439A02645
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/13/07	Annual	12/12/08	3008A00985
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
Agilent	HP 8566B (100Hz-22GHz) Spectrum Analyzer	12/13/07	Annual	12/13/08	3638A08713
Agilent	HP 8591A (9kHz-1.8GHz) Spectrum Analyzer	09/18/07	Annual	09/18/08	3144A02458
Agilent	HP 8901A Modulation Analyzer	06/18/07	Annual	06/18/08	2432A03467
Agilent	HP 8903 B Audio Analyzer	06/01/07	Annual	06/01/08	3011A09025
Compliance Design	Roberts Dipole Set	11/09/07	Biennial	11/08/09	146
Compliance Design	Roberts Dipole Set	11/09/07	Biennial	11/08/09	147
EMCO	3116 Horn Antenna (18 - 40GHz)	08/25/05	Triennial	08/24/08	9203-2178
EMCO	3816/2 LISN	08/09/06	Biennial	08/08/08	9707-1077
EMCO	3816/2 LISN	08/09/06	Biennial	08/08/08	9707-1079
EMCO	Dipole Pair	09/20/06	Biennial	09/19/08	23951
EMCO	Model 3115 (1-18GHz) Horn Antenna	09/24/07	Biennial	09/23/09	9704-5182
EMCO	Model 3115 (1-18GHz) Horn Antenna	10/04/07	Biennial	10/03/09	9205-3874
Gigatronics	80701A (0.05-18GHz) Power Sensor	04/20/07	Annual	04/19/08	1835299
Gigatronics	80701A (0.05-18GHz) Power Sensor	06/22/07	Annual	06/21/08	1833460
Gigatronics	8651A (50MHz-18GHz)	04/20/07	Annual	04/19/08	1834052
Gigatronics	8651A Universal Power Meter	06/22/07	Annual	06/21/08	8650319
MiniCircuits	VHF-1300+ High Pass Filter	N/A		N/A	30716
MiniCircuits	VHF-3100+ High Pass Filter	N/A		N/A	30721
Pasternack	PE2208-6 Bidirectional Coupler	N/A		N/A	N/A
Schwarzbeck	UHA9105 Dipole Antenna (400 - 1GHz) Rx	06/19/07	Biennial	06/18/09	91052404
Schwarzbeck	UHA9105 Dipole Antenna (400 - 1GHz) Tx	06/19/07	Biennial	06/18/09	91052403
SOLAR	8012-50 LISN (2)	11/08/07	Biennial	11/07/09	0310233, 0310234

Table 4-1. Test Equipment

FCC ID: A3LSWCE100	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 8 of 22	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 4M62G7D

WiMAX BW = 4.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 4M45D7W

WiMAX BW = 4.45 MHz

D = Amplitude/Angle Modulated



7 = Quantized/Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission – WiMAX Band

Example: Middle Channel WiMAX Mode 2nd Harmonic (5200 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 3.2 dB at 5200 MHz. So 4.9 dB is added to the signal generator reading of -30.00 dBm yielding -25.1 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-25.1) = 50.6$ dBc.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 9 of 22



6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics, Co. Ltd.
 FCC ID: A3LSWCE100
 FCC Classification: Licensed Non-Broadcast Transmitter (TNB)
 Mode(s): WiMAX

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (Tx)					
2.1049, 27.53(l)(6)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 27.53(l)(4)(6)	Band Edge	< 43 + 10log ₁₀ (P[Watts]) within 5.5MHz from the band edge		PASS	Section 7.0
2.1051, 27.53(l)(4)(6)	Conducted Spurious Emissions	< 55 + 10log ₁₀ (P[Watts]) for all emissions greater than 5.5MHz from the band edge		PASS	Section 7.0
2.1046	Transmitter Conducted Output Power Measurements	N/A		PASS	Section 6.2
27.50(h)(2)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP	RADIATED	PASS	Section 6.3
2.1053, 27.53(l)(4)	Undesirable Emissions	< 55 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.4
2.1055, 27.54	Frequency Stability	Fundamental emissions must stay within the allotted band		PASS	Section 6.5
RECEIVER MODE (Rx) / DIGITAL EMISSIONS					
15.107	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Pt. 15B Test Report
15.109	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits or < RSS-Gen limits [Section 6; Table 1]	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Pt. 15B Test Report
RF EXPOSURE					
2.1091 / 2.1093	SAR Test	1.6 W/kg (SAR Limit)	SAR	PASS	SAR Report

Table 6-1. Summary of Test Results

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 10 of 22	

6.2 Transmitter Conducted Output Power

§2.1046

A WiMAX test set was used as an external trigger source to a spectrum analyzer. The trigger was set in such a way that the analyzer recorded power measurements only during the times in which the EUT's was transmitting. The WiMAX conducted powers are reported below as well as a test setup diagram.

			5MHz Bandwidth			
Band	Band Segment	Frequency [MHz]	QPSK		16QAM	
			BAMC	PUSC	BAMC	PUSC
			[dBm]	[dBm]	[dBm]	[dBm]
EBS/BR5	LBS	2501.00	23.18	22.65	23.38	22.54
	MBS	2600.00	23.26	22.77	23.32	22.71
	UBS	2685.00	22.72	22.23	23.21	22.21

Table 6-2. WiMAX Conducted Output Power with 5MHz Bandwidth

			10MHz Bandwidth			
Band	Band Segment	Frequency [MHz]	QPSK		16QAM	
			BAMC	PUSC	BAMC	PUSC
			[dBm]	[dBm]	[dBm]	[dBm]
EBS/BR5	LBS	2501.00	23.10	22.75	23.51	22.51
	MBS	2600.00	23.28	22.90	23.35	22.87
	UBS	2685.00	22.78	22.40	23.42	22.21

Table 6-3. WiMAX Conducted Output Power with 10MHz Bandwidth

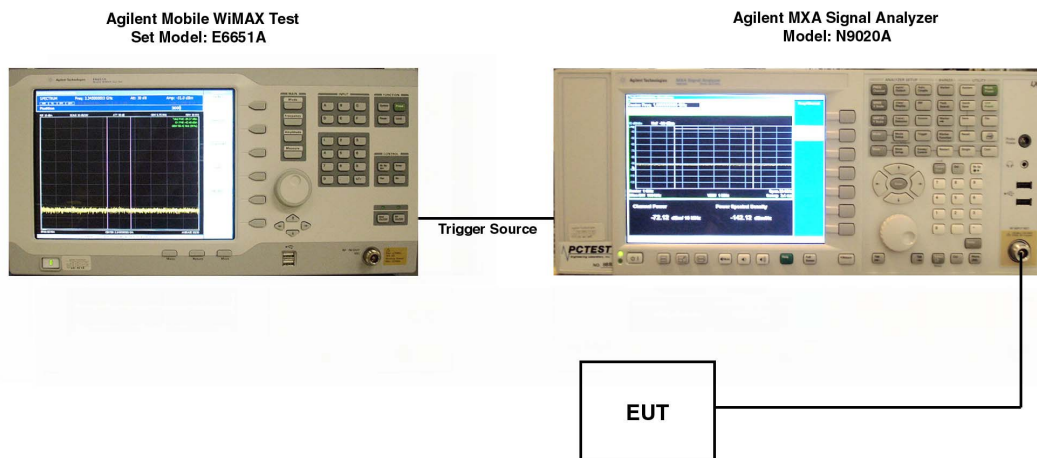




Figure 6-1. WiMAX Conducted Power Test Setup Diagram

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 11 of 22	

6.3 Equivalent Isotropic Radiated Power Output Data

§27.50(h)(2)

POWER: Maximum (WiMAX Mode)

Frequency [MHz]	Modulation	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
2498.50	16QAM	-25.880	13.64	8.00	V	21.64	0.146	Standard
2600.00	16QAM	-27.040	12.48	8.00	V	20.48	0.112	Standard
2687.50	16QAM	-25.500	14.02	8.00	V	22.02	0.159	Standard
2687.50	QPSK	-25.680	13.84	8.00	V	21.84	0.153	Standard



Table 6-4. Equivalent Isotropic Radiated Power Output Data

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. This level was measured by a broadband power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same power meter reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration.

This device was tested under all configurations and the worst case is reported with BAMC 16QAM modulation. This unit was tested with its standard battery.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 12 of 22	

6.4 WiMAX Radiated Measurements

§2.1053, §27.53(l)(4)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 2498.50 MHz
 CHANNEL: LBS
 MEASURED OUTPUT POWER: 22.020 dBm = 0.159 W
 MODULATION SIGNAL: WiMAX (Internal)
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W) =$ 47.02 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
4997.00	-58.82	10.50	-48.32	V	70.3
7495.50	-55.49	10.60	-44.89	V	66.9
9994.00	-56.20	12.00	-44.20	V	66.2
12492.50	-79.01	12.49	-66.52	V	88.5
14991.00	-73.07	12.97	-60.10	V	82.1



Table 6-5. Radiated Spurious Data (WiMAX Mode)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. This level was measured by a broadband power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same power meter reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration.

This device was tested under all configurations and the worst case is reported with BAMC 16QAM modulation. This unit was tested with its standard battery.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 13 of 22	

WiMAX Radiated Measurements (Cont'd)

§2.1053, §27.53(l)(4)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 2600.00 MHz
 CHANNEL: MBS
 MEASURED OUTPUT POWER: 22.020 dBm = 0.159 W
 MODULATION SIGNAL: WiMAX (Internal)
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W) =$ 47.02 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
5200.00	-58.71	10.46	-48.25	V	70.3
7800.00	-56.21	10.84	-45.36	V	67.4
10400.00	-54.72	12.16	-42.56	V	64.6
13000.00	-77.07	12.30	-64.77	V	86.8
15600.00	-75.91	15.30	-60.61	V	82.6



Table 6-6. Radiated Spurious Data (WiMAX Mode)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. This level was measured by a broadband power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same power meter reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration.

This device was tested under all configurations and the worst case is reported with BAMC 16QAM modulation. This unit was tested with its standard battery.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 14 of 22	

WiMAX Radiated Measurements (Cont'd)
§2.1053, §27.53(l)(4)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 2687.50 MHz
 CHANNEL: UBS
 MEASURED OUTPUT POWER: 22.020 dBm = 0.159 W
 MODULATION SIGNAL: WiMAX (Internal)
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W) =$ 47.02 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
5375.00	-59.20	10.42	-48.77	V	70.8
8062.50	-54.50	11.04	-43.46	V	65.5
10750.00	-53.61	12.50	-41.11	V	63.1
13437.50	-75.84	12.30	-63.54	V	85.6
16125.00	-74.75	15.48	-59.28	V	81.3



Table 6-7. Radiated Spurious Data (WiMAX Mode)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. This level was measured by a broadband power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same power meter reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration.

This device was tested under all configurations and the worst case is reported with BAMC 16QAM modulation. This unit was tested with its standard battery.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 15 of 22	

6.5 WiMAX Frequency Stability Measurements

§2.1055, §27.54

OPERATING FREQUENCY: 2,600,000,000 Hz

CHANNEL: MBS



REFERENCE VOLTAGE: 10.65 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	10.65	+ 20 (Ref)	2,600,000,497	497	0.000019
100 %		- 30	2,600,016,351	16351	0.000629
100 %		- 20	2,600,008,981	8981	0.000345
100 %		- 10	2,600,005,023	5023	0.000193
100 %		0	2,599,980,272	-19728	-0.000759
100 %		+ 10	2,600,005,250	5250	0.000202
100 %		+ 20	2,599,994,431	-5569	-0.000214
100 %		+ 30	2,600,003,268	3268	0.000126
100 %		+ 40	2,599,995,214	-4786	-0.000184
100 %		+ 50	2,600,017,714	17714	0.000681
115 %	12.25	+ 20	2,600,009,102	9102	0.000350
BATT. ENDPOINT	9.45	+ 20	2,600,013,450	13450	0.000517

Table 6-8. Frequency Stability Data (WiMAX Mode)

Note:

The frequency deviation was measured to ensure that the channels' emissions remained within the authorized band with varying temperature and voltage.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 16 of 22	

WiMAX Frequency Stability Measurements (Cont'd)
§2.1055, §27.54


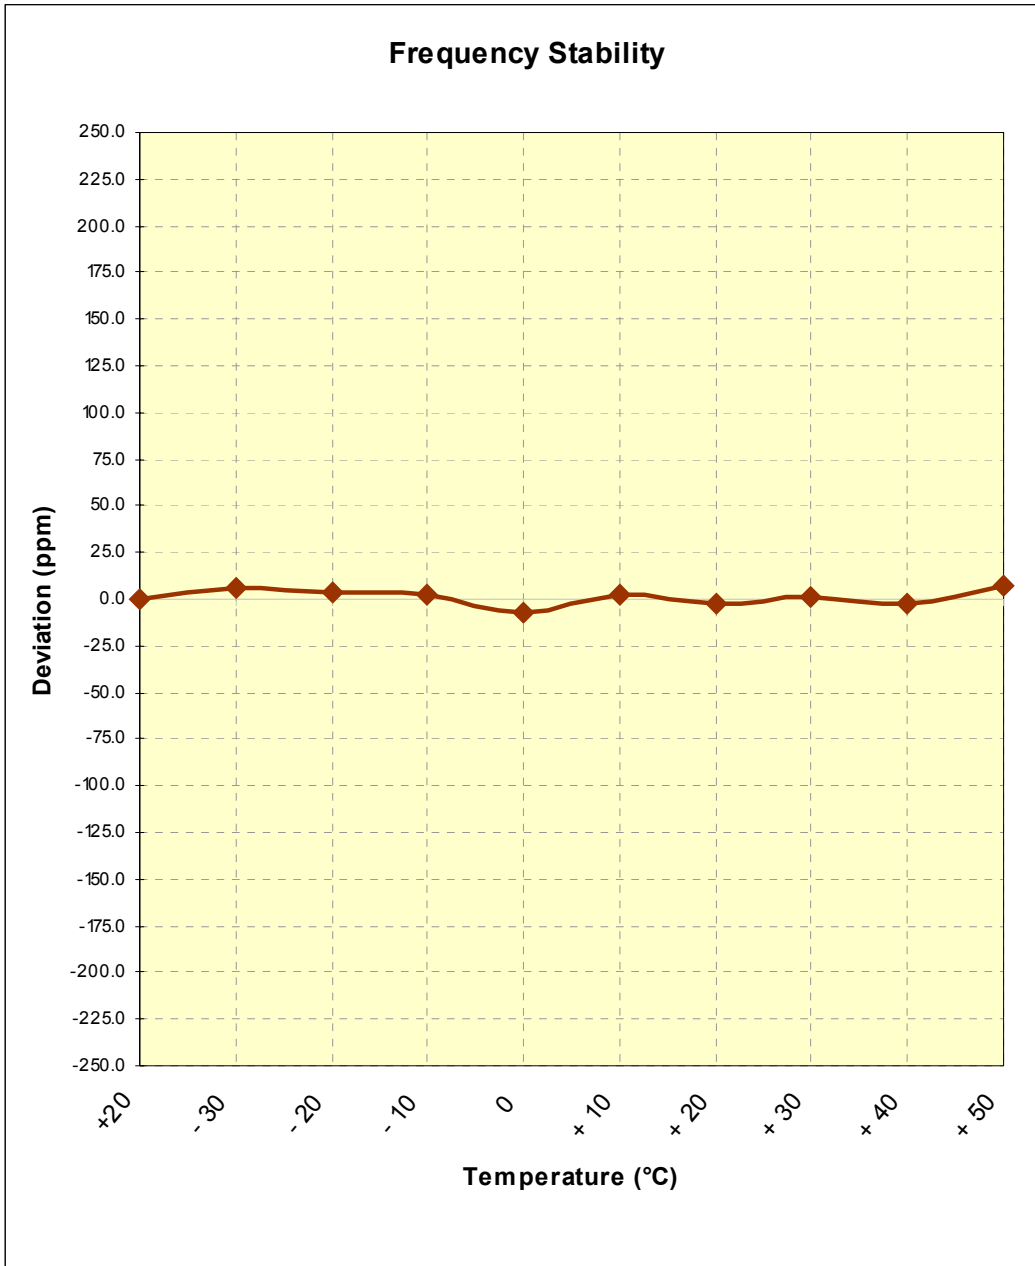


Figure 6-2. Frequency Stability Graph (WiMAX Mode)


Note:

The frequency deviation was measured to ensure that the channels emissions remained within the authorized band with varying temperature and voltage.

FCC ID: A3LSWCE100	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card	Page 17 of 22	

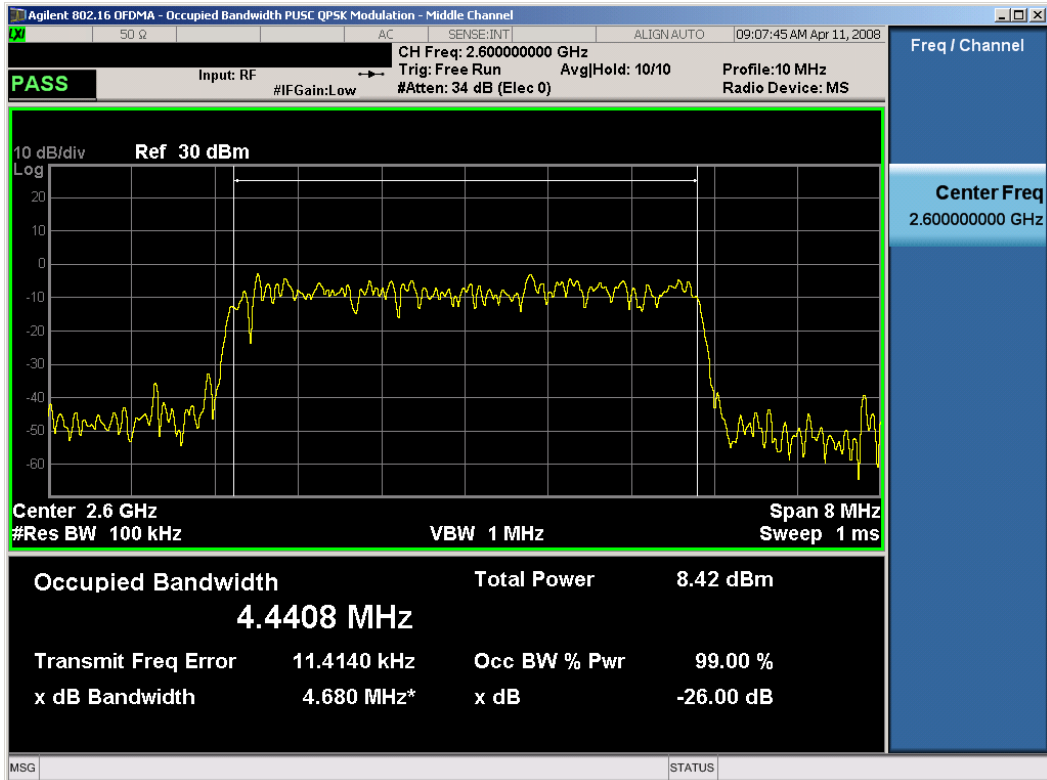


Plot 7-3. Occupied Bandwidth with PUSC QPSK Modulation Plot (WiMAX Mode – Mid Channel)

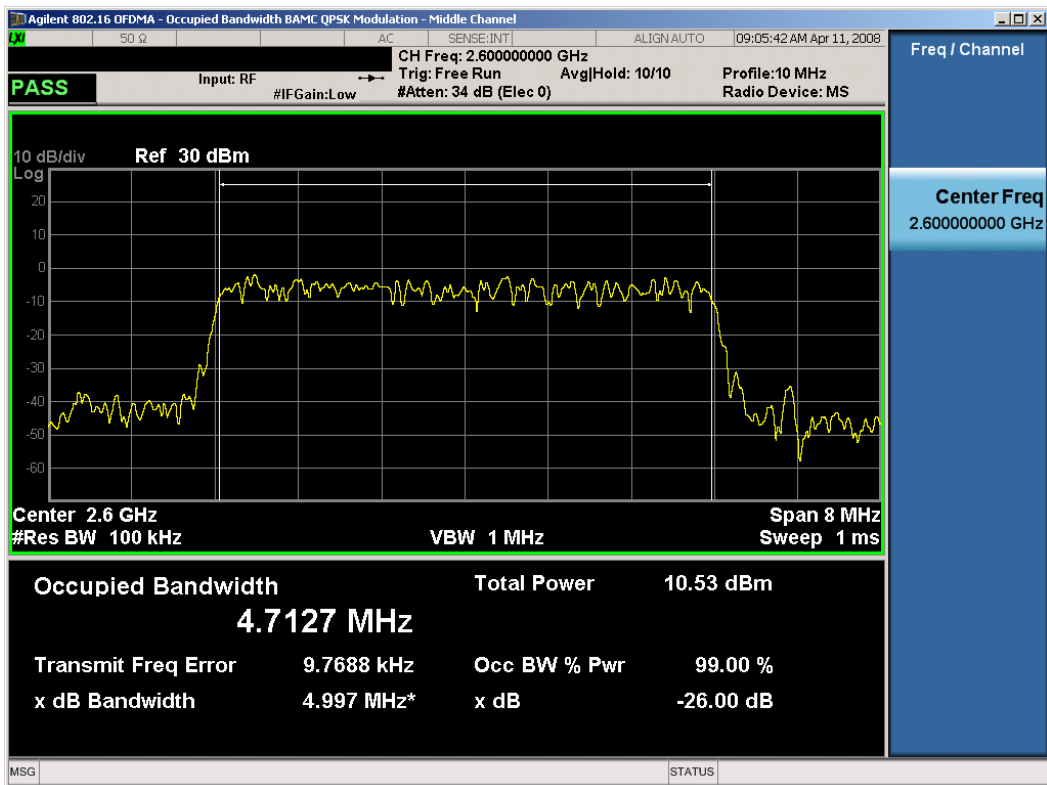


Plot 7-4. Occupied Bandwidth with BAMC QPSK Modulation Plot (WiMAX Mode – Mid Channel)

FCC ID: A3LSWCE100	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 19 of 22

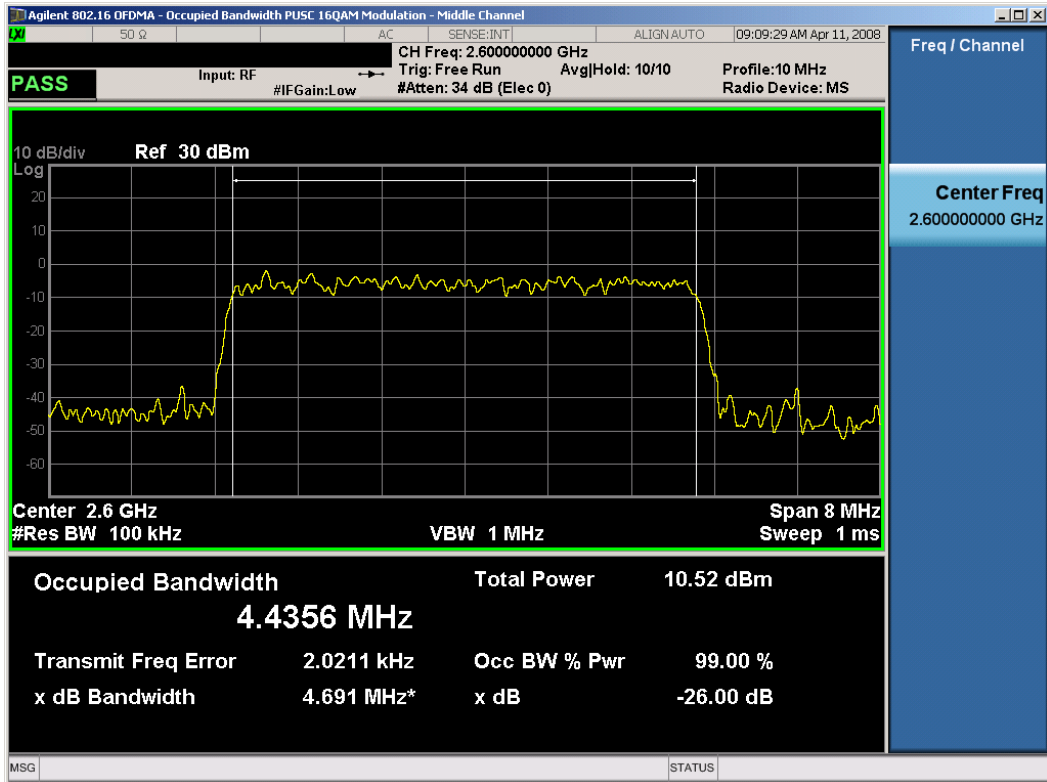

Plot 7-5. Occupied Bandwidth with PUSC 16QAM Modulation Plot (WiMAX Mode – Mid Channel)

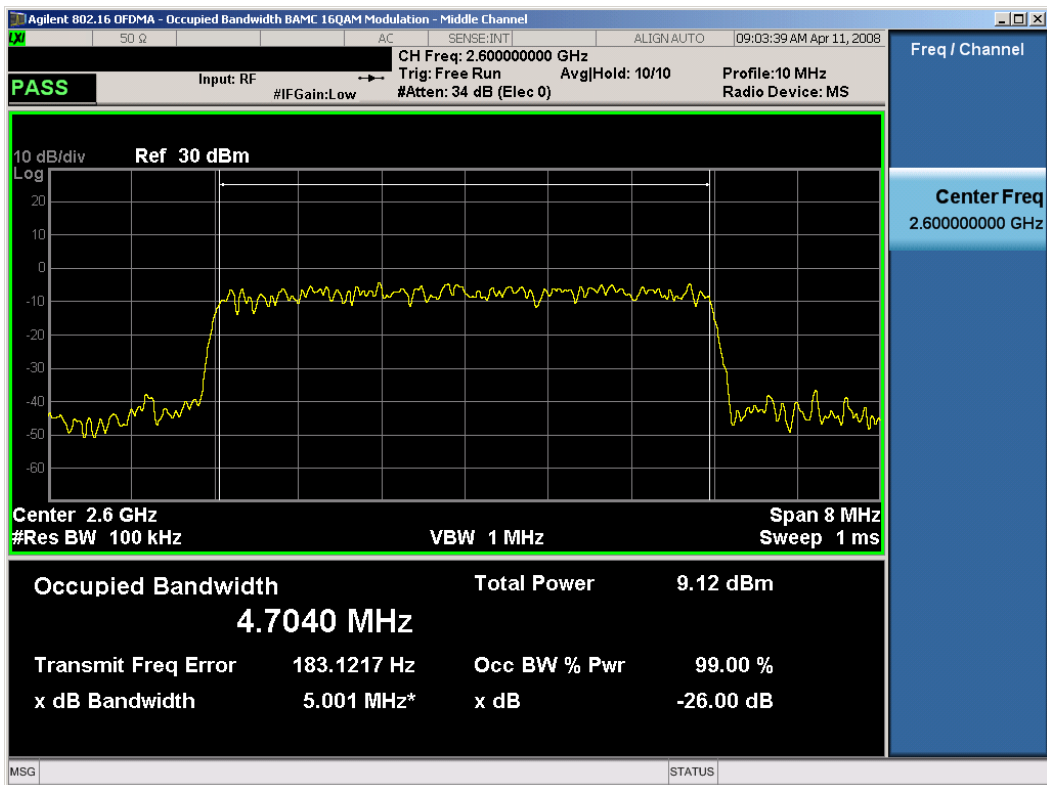

Plot 7-6. Occupied Bandwidth with BAMC 16QAM Modulation Plot (WiMAX Mode – Mid Channel)

FCC ID: A3LSWCE100	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 20 of 22



Plot 7-7. Band Edge Plot (WiMAX Mode – High Channel)





Plot 7-8. 5.5MHz Band Edge Plot (WiMAX Mode – High Channel)

FCC ID: A3LSWCE100	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 21 of 22

8.0 CONCLUSION

The data collected show that the **Samsung WiMAX Data Card FCC ID: A3LSWCE100** complies with all the requirements of Parts 2 and 27 of the FCC rules.

FCC ID: A3LSWCE100		FCC Pt. 27 / 802.16e WiMAX MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0803270373.A3L	Test Dates: April 10 - 11, 2008	EUT Type: WiMAX Data Card		Page 22 of 22