

**CFR 47 FCC PART 15 SUBPART E
ISED RSS-248 ISSUE 2**

TEST REPORT

For

Wi-Fi/BT Transceiver

MODEL NUMBER: WCD940M

REPORT NUMBER: 4791147013-RF-5

ISSUE DATE: February 9, 2024

**FCC ID:A3LWCD940M
IC:649E-WCD940M**

Prepared for

**FCC: Samsung Electronics Co Ltd
19 Chapin Rd., Building D, Pine Brook New Jersey, 07058 United States**

**ISED: SAMSUNG ELECTRONICS CO. LTD.
129 Samsung-ro, Yeongtong-gu, Suwon-Si Gyeonggi-do 16677 Korea (Republic Of)**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>V0</u>	<u>February 9, 2024</u>	<u>Initial Issue</u>	<u></u>

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
On Time And Duty Cycle	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
26dB Emission Bandwidth And 99% Occupied Bandwidth	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a) (10) RSS-248 Issue 2, Clause 4.4 RSS-Gen Clause 6.7	Pass
Conducted Output Power	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC 15.407 (a) RSS-248 Issue 2, Clause 4.5	Pass
Power Spectral Density	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a) RSS-248 Issue 2, Clause 4.5	Pass
In-Band Emissions (Mask)	KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 J	FCC 15.407 (b) RSS-248 Issue 2, Clause 4.6	Pass
Frequency Stability	ANSI C63.10-2013, Clause 6.8	FCC 15.407 (g)	Pass
Contention-based Protocol	KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 I	FCC 15.407 (d) (6) RSS-248 Issue 2, Clause 4.7	Pass
Radiated Emissions And Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205 RSS-248 Issue 2, Clause 4.6 RSS-GEN Clause 8.9	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207 RSS-GEN Clause 8.8	Pass
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2), RSS-Gen Issue 5, Clause 6.8	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E
ISED RSS-248 ISSUE 2> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	9
4.2. <i>MEASUREMENT UNCERTAINTY</i>	9
5. EQUIPMENT UNDER TEST	10
5.1. <i>DESCRIPTION OF EUT</i>	10
5.2. <i>CHANNEL LIST</i>	11
5.3. <i>MAXIMUM POWER</i>	14
5.4. <i>TEST CHANNEL CONFIGURATION</i>	15
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	16
5.6. <i>WORSE CASE CONFIGURATIONS</i>	26
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	29
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	30
6. MEASURING EQUIPMENT AND SOFTWARE USED	31
7. ANTENNA PORT TEST RESULTS	34
7.1. <i>ON TIME AND DUTY CYCLE</i>	34
7.2. <i>26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i>	35
7.3. <i>CONDUCTED OUTPUT POWER</i>	37
7.4. <i>POWER SPECTRAL DENSITY</i>	40
7.5. <i>IN-BAND EMISSIONS (MASK)</i>	43
7.6. <i>FREQUENCY STABILITY</i>	45
7.7. <i>CONTENTION-BASED PROTOCOL</i>	47
8. RADIATED TEST RESULTS	51
8.1. <i>RESTRICTED BANDEDGE</i>	59
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~9 GHZ)</i>	123
8.3. <i>SPURIOUS EMISSIONS(9 GHZ~18 GHZ)</i>	147
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	259
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	262
8.6. <i>SPURIOUS EMISSIONS(26 GHZ~40 GHZ)</i>	264
8.7. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	266
8.8. <i>SIMULTANEOUSLY TRANSMISSION SPURIOUS EMISSIONS</i>	268

9.	AC POWER LINE CONDUCTED EMISSION	272
10.	ANTENNA REQUIREMENT	275
11.	TEST DATA.....	276
11.1.	<i>APPENDIX A1: EMISSION BANDWIDTH</i>	<i>276</i>
11.1.1.	Test Result.....	276
11.1.2.	Test Graphs.....	277
11.2.	<i>APPENDIX A2: EMISSION BANDWIDTH FOR OFDMA</i>	<i>283</i>
11.2.1.	Test Result.....	283
11.2.2.	Test Graphs.....	303
11.3.	<i>APPENDIX B1: OCCUPIED CHANNEL BANDWIDTH</i>	<i>533</i>
11.3.1.	Test Result.....	533
11.3.2.	Test Graphs.....	534
11.4.	<i>APPENDIX B2: OCCUPIED CHANNEL BANDWIDTH FOR OFDMA</i>	<i>540</i>
11.4.1.	Test Result.....	540
11.4.2.	Test Graphs.....	545
11.5.	<i>APPENDIX C: DUTY CYCLE</i>	<i>606</i>
11.5.1.	Test Result.....	606
11.5.2.	Test Graphs.....	607
11.6.	<i>APPENDIX D1: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	<i>612</i>
11.6.1.	Test Result.....	612
11.7.	<i>APPENDIX D2: MAXIMUM CONDUCTED OUTPUT POWER FOR OFDMA.....</i>	<i>613</i>
11.7.1.	Test Result.....	613
11.8.	<i>APPENDIX E1: MAXIMUM POWER SPECTRAL DENSITY.....</i>	<i>623</i>
11.8.1.	Test Result.....	623
11.8.2.	Test Graphs.....	624
11.9.	<i>APPENDIX E2: MAXIMUM POWER SPECTRAL DENSITY FOR OFDMA.....</i>	<i>630</i>
11.9.1.	Test Result.....	630
11.9.2.	Test Graphs.....	638
11.10.	<i>APPENDIX F1: IN-BAND EMISSIONS.....</i>	<i>698</i>
11.10.1.	Test Result.....	698
11.10.2.	Test Graphs.....	699
11.11.	<i>APPENDIX F2: INBAND EMISSIONS FOR OFDMA</i>	<i>702</i>
11.11.1.	Test Result.....	702
11.11.2.	Test Graphs.....	704
11.12.	<i>APPENDIX G: FREQUENCY STABILITY.....</i>	<i>714</i>
11.12.1.	Test Result.....	714
11.13.	<i>APPENDIX H: CONTENTION BASED PROTOCOL</i>	<i>715</i>
11.13.1.	Test Result.....	715
11.13.2.	Test Graphs for worst case	719

1. ATTESTATION OF TEST RESULTS

FCC Applicant Information

Company Name: Samsung Electronics Co Ltd
Address: 19 Chapin Rd., Building D, Pine Brook New Jersey, 07058
United States

ISED Applicant Information

Company Name: SAMSUNG ELECTRONICS CO. LTD.
Address: 129 Samsung-ro, Yeongtong-gu, Suwon-Si Gyeonggi-do 16677
Korea (Republic Of)

Manufacturer Information 1

Company Name: Chendu Xuguang Technology Co.,Ltd.
Address: No.86 2nd section, Park Road, Longquanyi District, Chengdu
City, Sichuan Province, P.R.China

Manufacturer Information 2

Company Name: CHEMTRONICS CO., LTD.
Address: 35, Buk-ri, Namsa-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do,
Korea

Manufacturer Information 3

Company Name: CHEMTROVINA COMPANY LIMITED
Address: Nhon Trach 2 - Loc Khang IZ, Hiep Phuoc Town, Nhon Trach
District, Dong Nai Province, Vietnam

Manufacturer Information 4

Company Name: Shenzhen Zowee Technology Co.,Ltd.
Address: Block 5, Science & Technology Industrial Park of Privately
Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen

Company Name: Shenzhen Zowee Smart Manufacturing Co., Ltd
Address: Factory 1, Factory 2-3 and Dormitory No. 1 & Dormitory No. 2,
No. 149, Tangxiachong Second Industrial Road, Tangxiachong
Community, Yanluo Street, Bao'an District, Shenzhen City; Has
business premises for production and business activities (Floor
1~5), Block D, Factory 10, Tongfu Road, Tangxiachong
Community, Yanluo Street

Company Name: TianJin Zowee Technology Development Co., Ltd.
Address: NO.71 Xinhuan South Street, West Zone of Tianjin Economic
and Technology Development Zone

Manufacturer Information 5


Company Name: SEONG JI SAI GON COMPANY LIMITED
Address 1: No.02, St.3A, Bien Hoa II industrial Zone, Long Binh Tan Ward,
Bien Hoa City, Dong Nai Province, VietNam
Address 2: Nha xuong C, D, Lo.X2, Khu Cong Nghiep Ho Nai, Xa Ho Nai3,
Huyen Trang Bom, Tinh Dong Nai, VietNam

EUT Information

EUT Name: Wi-Fi/BT Transceiver
 Model: WCD940M
 Brand: Samsung
 Sample Received Date: September 27, 2023
 Sample Status: Normal
 Sample ID: 6637995
 Date of Tested: November 20, 2023 to January 8, 2024


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E ISED RSS-248 ISSUE 2	Pass

Prepared By:



Fanny Huang
Engineer Project Associate

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E ISED RSS-248 ISSUE 2, ANSI C63.10-2013, CFR 47 FCC Part 2, CFR 47 FCC Part 15, KDB 789033 D02 v02r01, RSS-GEN Issue 5, RSS-248 Issue 2, KDB414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB987594 D01 U-NII 6GHz General Requirements v02r02, KDB987594 D02 U-NII 6 GHz EMC Measurement v02r01.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Wi-Fi/BT Transceiver
Model	WCD940M

Radio Technology:	IEEE802.11a/ax HE20/HE40/HE80
Operation Frequency:	UNII-5 Band: 5925MHz ~ 6425 MHz UNII-6 Band: 6425MHz ~ 6525 MHz UNII-7 Band: 6525MHz ~ 6875 MHz UNII-8 Band: 6875MHz ~ 7125 MHz
RF Classification:	6XD (indoor client)
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) IEEE 802.11ax HE40: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) IEEE 802.11ax HE80: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Normal Test Voltage:	5 Vdc

5.2. CHANNEL LIST

802.11a					
UNII-5 (For Bandwidth=20MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	/	/	/	/
5	5975	37	6135	69	6295
/	/	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/
21	6055	53	6215	85	6375
/	/	/	/	/	/
/	/	/	/	/	/
UNII-6 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	/	/	/	/
101	6455	/	/	/	/
UNII-7 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	/	/	165	6775
/	/	/	/	/	/
/	/	149	6695	/	/
/	/	/	/	/	/
133	6615	/	/	181	6855
/	/	/	/	/	/
UNII-8 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	/	/	/	/
/	/	/	/	/	/
197	6935	213	7015	229	7095
/	/	/	/	/	/

802.11ax					
UNII-5 (For Bandwidth=20MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	33	6115	65	6275
5	5975	37	6135	69	6295
9	5995	41	6155	73	6315
13	6015	45	6175	77	6335
17	6035	49	6195	81	6355
21	6055	53	6215	85	6375
25	6075	57	6235	89	6395
29	6095	61	6255	93	6415
UNII-6 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	105	6475	113	6515
101	6455	109	6495	/	/
UNII-7 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	141	6655	165	6775
121	6555	145	6675	169	6795
125	6575	149	6695	173	6815
129	6595	153	6715	177	6835
133	6615	157	6735	181	6855
137	6635	161	6755	/	/
UNII-8 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
185	6875	205	6975	225	7075
189	6895	209	6995	229	7095
193	6915	213	7015	233	7115
197	6935	217	7035	/	/
201	6955	221	7055	/	/
UNII-5 (For Bandwidth=40MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	35	6125	67	6285
11	6005	43	6165	75	6325
19	6045	51	6205	83	6365
27	6085	59	6245	91	6405
UNII-6 (For Bandwidth=40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
99	6445	107	6485	115	6525
UNII-7 (For Bandwidth=40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	139	6645	163	6765
123	6605	147	6685	171	6805
131	6645	155	6725	179	6845

UNII-8 (For Bandwidth=40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
187	6885	203	6965	219	7045
195	6925	211	7005	227	7085
UNII-5 (For Bandwidth=80MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	39	6145	71	6305
23	6065	55	6225	87	6385
UNII-6 (For Bandwidth=80 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
103	6465	/	/	/	/
UNII-7 (For Bandwidth=80 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
119	6545	151	6705	/	/
135	6625	167	6785	/	/
UNII-8 (For Bandwidth=80 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
183	6865	199	6945	215	7025

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)	Maximum Average EIRP (dBm)
a	5955 ~ 7115	6.95	8.07
ax HE20		5.72	6.84
ax HE40		7.59	8.71
ax HE80		10.69	11.81

5.4. TEST CHANNEL CONFIGURATION

UNII-5 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 5(Low Channel), CH 37(MID Channel), CH 85(High Channel)	5975 MHz, 6135 MHz, 6375 MHz
802.11ax HE20	CH 1(Low Channel), CH 45(MID Channel), CH 93(High Channel)	5955 MHz, 6175 MHz, 6415 MHz
802.11ax HE40	CH 3(Low Channel), CH 43(MID Channel), CH 91(High Channel)	5965 MHz, 6165 MHz, 6405 MHz
802.11ax HE80	CH 7(Low Channel), CH 39(MID Channel), CH 87(High Channel)	5985 MHz, 6145 MHz, 6385 MHz

UNII-6 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 101(Low Channel)	6455 MHz
802.11ax HE20	CH 97(Low Channel), CH 105(MID Channel), CH 113(High Channel)	6435 MHz, 6475 MHz, 6515 MHz
802.11ax HE40	CH 99(Low Channel), CH 107(MID Channel), CH 115(High Channel)	6445 MHz, 6485 MHz, 6525 MHz
802.11ax HE80	CH 103(Low Channel)	6465 MHz

UNII-7 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 117(Low Channel), CH 149(MID Channel), CH 181(High Channel)	6535 MHz, 6695 MHz, 6855 MHz
802.11ax HE20	CH 117(Low Channel), CH 153(MID Channel), CH 181(High Channel)	6535 MHz, 6715 MHz, 6855 MHz
802.11ax HE40	CH 123(Low Channel), CH 155(MID Channel), CH 179(High Channel)	6565 MHz, 6725 MHz, 6845 MHz
802.11ax HE80	CH 119(Low Channel), CH 151(MID Channel), CH 167(High Channel)	6545 MHz, 6705 MHz, 6785 MHz

UNII-8 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 197(Low Channel), CH 213(MID Channel), CH 229(High Channel)	6935 MHz, 7015 MHz, 7095 MHz
802.11ax HE20	CH 185(Low Channel), CH 213(MID Channel), CH 233 (High Channel)	6875 MHz, 7015 MHz, 7115 MHz
802.11ax HE40	CH 187(Low Channel), CH 211(MID Channel), CH 227(High Channel)	6885 MHz, 7005 MHz, 7085 MHz
802.11ax HE80	CH 183(Low Channel), CH 199(Low Channel), CH 215(High Channel)	6865 MHz, 6945 MHz, 7025 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter					
Test Software	QA tool				

Mode	Freq(MHz)	RU size	RU Index	Dec value from QA		
802.11a	5975	/	/	4	6.5	
	6135	/	/	6.5	6.5	
	6375	/	/	6.5	6.5	
	6455	/	/	6.5	6.5	
	6535	/	/	4	4	
	6695	/	/	4	4	
	6855	/	/	1.5	4	
	6935	/	/	1.5	4	
	7015	/	/	4	6.5	
	7095	/	/	1.5	1.5	
802.11AX 20M	5955	26	0	-6		
			4	-6		
			8	-6		
		52	37	-6		
			38	-6		
			40	-6		
			106	53	-3.5	
				54	-3.5	
			242	61	1.5	
	6175	26	0	-8.5		
			4	-8.5		
			8	-8.5		
		52	37	-8.5		
			38	-8.5		
			40	-8.5		
		106	53	-6		
			54	-6		
			242	61	-1	
	6415	26	0	-8.5		
			4	-8.5		
			8	-8.5		
		52	37	-8.5		
			38	-8.5		
			40	-8.5		
106		53	-6			
		54	-6			
		242	61	-1		

	6435	26	0	-6
			4	-6
			8	-6
		52	37	-3.5
			38	-3.5
			40	-3.5
		106	53	-1
			54	-1
			242	61
	6475	26	0	-6
			4	-6
			8	-6
		52	37	-3.5
			38	-3.5
			40	-3.5
106		53	-1	
		54	-1	
		242	61	1.5
6515	26	0	-6	
		4	-6	
		8	-6	
	52	37	-3.5	
		38	-3.5	
		40	-3.5	
	106	53	-1	
		54	-1	
		242	61	1.5
6535	26	0	-6	
		4	-6	
		8	-6	
	52	37	-3.5	
		38	-3.5	
		40	-3.5	
	106	53	-1	
		54	-1	
		242	61	1.5
6715	26	0	-6	
		4	-6	
		8	-6	
	52	37	-3.5	
		38	-3.5	
		40	-3.5	
	106	53	-1	
		54	-1	
		242	61	1.5

			54	-1	
		242	61	1.5	
	6855	26		0	-8.5
				4	-8.5
				8	-8.5
		52		37	-6
				38	-6
				40	-6
		106		53	-3.5
				54	-3.5
	242		61	-1	
	6875	26		0	-8.5
				4	-8.5
				8	-8.5
		52		37	-8.5
				38	-8.5
				40	-8.5
		106		53	-6
				54	-6
	242		61	-1	
	7015	26		0	-6
				4	-6
				8	-6
		52		37	-6
			38	-6	
			40	-6	
106			53	-1	
			54	-1	
242		61	1.5		
7115	26		0	-11	
			4	-11	
			8	-11	
	52		37	-8.5	
			38	-8.5	
			40	-8.5	
	106		53	-6	
			54	-6	
242		61	-1		
802.11AX 40M	5965	26		0	-7
				8	-7
				17	-7
		52		37	-4.5
				40	-4.5

			44	-4.5
		106	53	-4.5
			54	-4.5
	56		-4.5	
	242	61	0.5	
		62	0.5	
	484	65	5.5	
	6165	26	0	-7
			8	-7
			17	-7
		52	37	-4.5
			40	-4.5
			44	-4.5
		106	53	-2
			54	-2
56			-2	
242		61	3	
		62	3	
484		65	3	
6405	26	0	-7	
		8	-7	
		17	-7	
	52	37	-4.5	
		40	-4.5	
		44	-4.5	
	106	53	-2	
		54	-2	
		56	-2	
	242	61	3	
		62	3	
	484	65	0.5	
6445	26	0	-7	
		8	-7	
		17	-7	
	52	37	-4.5	
		40	-4.5	
		44	-4.5	
	106	53	-2	
		54	-2	
		56	-2	
	242	61	3	
		62	3	
	484	65	5.5	

	6485	26	0	-7
			8	-7
			17	-7
		52	37	-4.5
			40	-4.5
			44	-4.5
		106	53	-2
			54	-2
			56	-2
	242	61	3	
		62	3	
	484	65	5.5	
	6525	26	0	-7
			8	-7
			17	-7
		52	37	-4.5
			40	-4.5
			44	-4.5
		106	53	-2
			54	-2
			56	-2
242		61	3	
		62	3	
484		65	5.5	
6565		26	0	-7
			8	-7
			17	-7
	52	37	-4.5	
		40	-4.5	
		44	-4.5	
	106	53	-2	
		54	-2	
		56	-2	
	242	61	0.5	
		62	0.5	
	484	65	3	
	6725	26	0	-7
			8	-7
			17	-7
52		37	-4.5	
		40	-4.5	
		44	-4.5	
106		53	-2	

			54	-2	
			56	-2	
		242	61	0.5	
			62	0.5	
		484	65	3	
	6845	26		0	-7
				8	-7
				17	-7
		52		37	-4.5
				40	-4.5
				44	-4.5
		106		53	-2
				54	-2
				56	-2
		242		61	0.5
				62	0.5
			484	65	3
	6885	26		0	-7
				8	-7
				17	-7
		52		37	-7
				40	-7
				44	-7
		106		53	-2
			54	-2	
			56	-2	
242			61	0.5	
			62	0.5	
		484	65	0.5	
7005	26		0	-9.5	
			8	-9.5	
			17	-9.5	
	52		37	-7	
			40	-7	
			44	-7	
	106		53	-2	
			54	-2	
			56	-2	
	242		61	0.5	
			62	0.5	
		484	65	3	
7085	26		0	-9.5	
			8	-9.5	

			17	-9.5	
			52	37	-7
				40	-7
				44	-7
				53	-2
			106	54	-2
				56	-2
				61	0.5
			242	62	0.5
				484	65
802.11AX 80M	5985	26	0	-7	
			17	-7	
			36	-7	
		52	37	-4.5	
			44	-4.5	
			52	-4.5	
		106	53	-4.5	
			56	-4.5	
			60	-4.5	
		242	61	0.5	
	62		0.5		
	64		0.5		
	484	65	3		
		66	3		
	996	67	8		
	6145	26	0	-7	
			17	-7	
			36	-7	
		52	37	-4.5	
			44	-4.5	
52			-4.5		
106		53	-2		
		56	-2		
		60	-2		
242		61	3		
	62	3			
	64	3			
484	65	5.5			
	66	5.5			
996	67	5.5			
6385	26	0	-7		
		17	-7		
		36	-7		

		52	37	-4.5	
			44	-4.5	
			52	-4.5	
		106	53	-2	
			56	-2	
			60	-2	
		242	61	3	
			62	3	
			64	3	
	484	65	5.5		
		66	5.5		
	996	67	5.5		
	6465	26	0	-7	
			17	-7	
			36	-7	
		52	37	-4.5	
			44	-4.5	
			52	-4.5	
		106	53	-2	
			56	-2	
			60	-2	
		242	61	3	
			62	3	
			64	3	
		484	65	5.5	
			66	5.5	
		996	67	8	
		6545	26	0	-7
				17	-7
				36	-7
52	37		-4.5		
	44		-4.5		
	52		-4.5		
106	53		-2		
	56		-2		
	60		-2		
242	61		3		
	62		3		
	64		3		
484	65		5.5		
	66		5.5		
996	67		8		
6705	26		0	-7	

		52	17	-7	
			36	-7	
			37	-4.5	
		106	44	-4.5	
			52	-4.5	
			53	-2	
		242	56	-2	
			60	-2	
			61	3	
		484	62	3	
			64	3	
			65	5.5	
		996	66	5.5	
		6785	26	67	8
				0	-7
	17			-7	
	52		36	-7	
			37	-4.5	
			44	-4.5	
	106		52	-4.5	
			53	-2	
			56	-2	
	242		60	-2	
			61	3	
			62	3	
	484		64	3	
			65	5.5	
			66	5.5	
	996	67	8		
	6865	26	0	-7	
17			-7		
36			-7		
52		37	-4.5		
		44	-4.5		
		52	-4.5		
106		53	-2		
		56	-2		
		60	-2		
242		61	0.5		
		62	0.5		
		64	0.5		
484		65	5.5		
		66	5.5		

		996	67	5.5	
	6945	26	0	-7	
			17	-7	
			36	-7	
		52	37	-4.5	
			44	-4.5	
			52	-4.5	
		106	53	-2	
			56	-2	
			60	-2	
		242	61	0.5	
			62	0.5	
			64	0.5	
		484	65	5.5	
			66	5.5	
			996	67	5.5
		7025	26	0	-7
	17			-7	
	36			-7	
	52		37	-4.5	
			44	-4.5	
			52	-4.5	
	106		53	-2	
			56	-2	
			60	-2	
	242		61	0.5	
			62	0.5	
			64	0.5	
	484		65	5.5	
			66	5.5	
			996	67	8

5.6. WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps
802.11ax HE20 mode: MCS0
802.11ax HE40 mode: MCS0
802.11ax HE80 mode: MCS0

802.11a only support SISO mode.
802.11ax HE20/HE40/HE80 support SISO and MIMO mode.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 0 and antenna 1 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

Worst-case selection criteria for 802.11ax test items:

802.11a/ax support OFDMA full RU tone and partial Single RU tone, investigation has been done on all the possible configurations for searching the worst cases, only the worst-case mode data recorded in this report.

Mode	Tones number in RU	RF offset
HE20	26T	0
		4
		8
	52T	37
		38
		40
	106T	53
		54
242T / SU <small>note1</small>		61 / -
HE40	26T	0
		9
		17
	52T	37
		41
		44
	106T	53
		54
		56
	242T	61
62		
484T / SU <small>note1</small>		63 / -
HE80	26T	0
		18
		36
	52T	37
		45
		52
		53
	106T	57
		60
		61
	242T	62
		64
		65
	484T	66
66		
966T / SU <small>note1</small>		67 / -

Note1.

Full RU (Resource Unit) mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the full RU mode with highest output power in MIMO.

Note2.

For the PSD, OBW and 26dBW, it was tested all the tones on middle channel and preformed the spot check on low channel and high channel.

Note3.

For In-Band Emissions has been done on all the possible configurations for searching the worst cases, only the worst-case mode data recorded in this report.

Note4.

For radiated band edge, full test for highest tones, sport check for the lowest offset for low channel and highest offset for high channel.

Note5.

For radiated emission, full test for highest tones, sport check for lowest offset of low channel for each tone.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band	Antenna 0 Gain (dBi)	Antenna 1 Gain (dBi)	Antenna Type
5925 ~ 7125	1.12	-0.37	PCB Antenna

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= G_{ANT} + Array Gain =1.12 dBi

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= G_{ANT} + Array Gain =4.13 dBi

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	AC Adaptor	Lenovo	MACS-1201001202	Input: 100-240 V~50/60 Hz, 0.35 A Output: DC 12V1A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

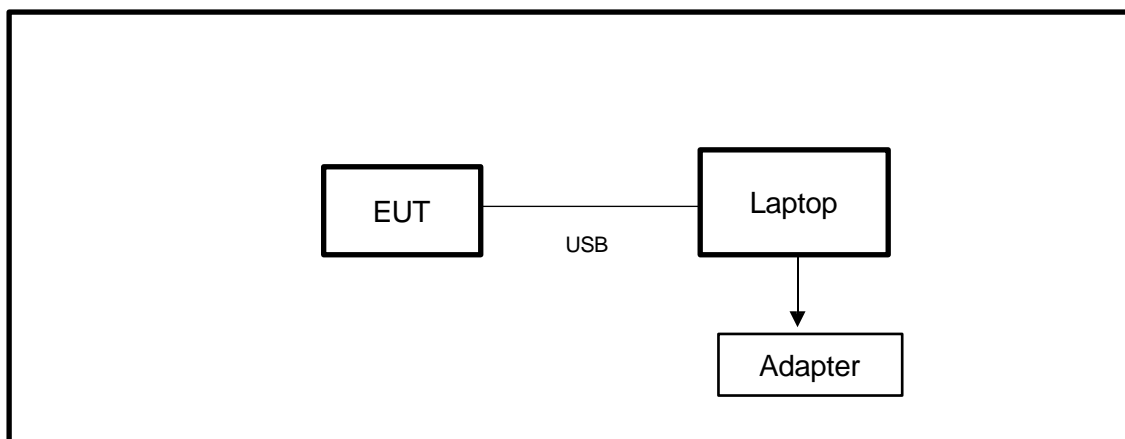

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.31,2023	Mar.30,2024
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	April 18, 2023	April 17, 2024
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Oct.12, 2023	Oct.11, 2024

Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	Oct.12, 2023	Oct.11, 2024
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	Oct.12, 2023	Oct.11, 2024
Highpass Filter	Xingbo	XBLBQ-GTA68	211115-2-1	Oct.12, 2023	Oct.11, 2024
Notch Filter (5905-6445 MHz)	Xingbo	XBLBQ-DZA175	210922-2-1	Oct.12, 2023	Oct.11, 2024
Notch Filter (6425-6525 MHz)	Xingbo	XBLBQ-DZA176	210922-2-2	Oct.12, 2023	Oct.11, 2024
Notch Filter (6825-7125 MHz)	Xingbo	XBLBQ-DZA177	210922-2-3	Oct.12, 2023	Oct.11, 2024
Notch Filter (6525-6875 MHz)	Xingbo	XBLBQ-DZA178	210922-2-4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

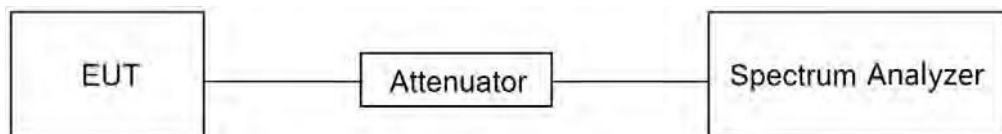

TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	November 11, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	The 26 dB bandwidth of the devices shall not exceed 320 MHz for all channels except the 320 MHz.	5.925-7.125 GHz

ISED RSS-248 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
99 % Occupied Bandwidth	The occupied bandwidth of the device shall not exceed 320 MHz.	5.925-7.125 GHz

TEST PROCEDURE


Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 26 dB Bandwidth: $>3 \times \text{RBW}$ For 99 % Bandwidth: $>3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

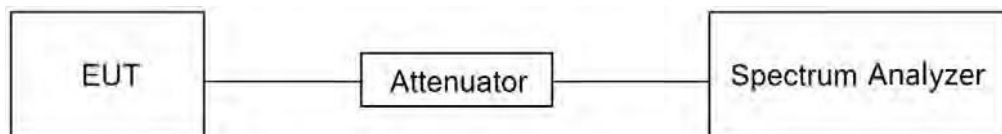

TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	November 11, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Standard Power Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).	5.925-6.425 GHz 6.525-6.875 GHz
	<input type="checkbox"/> Indoor Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.	5.925-7.125 GHz
	<input type="checkbox"/> Subordinate Device The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.	5.925-7.125 GHz
	<input type="checkbox"/> Client Devices, Operating Under The Control Of A Standard Power Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.	5.925-6.425 GHz 6.525-6.875 GHz
	<input checked="" type="checkbox"/> Client Devices, Operating Under The Control Of An Indoor Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.	5.925-7.125 GHz

ISED RSS-248 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Standard Power Access Point The maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 36 dBm and the maximum e.i.r.p. for a device not enclosed by walls and a ceiling, measured at any elevation angle greater than 30 degrees above the horizon, shall not exceed 21 dBm over the 5925-6875 MHz frequency band	5.925-6.425 GHz 6.525-6.875 GHz
	<input type="checkbox"/> Low-Power Indoor Access-Points The maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 30 dBm	5.925-7.125 GHz
	<input type="checkbox"/> Subordinate Device The maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 30 dBm	5.925-7.125 GHz
	<input type="checkbox"/> Standard Client Devices The maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 30 dBm and the maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point	5.925-6.425 GHz 6.525-6.875 GHz
	<input checked="" type="checkbox"/> Low-Power Client Devices The maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm	5.925-7.125 GHz

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times$ span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $<$ 98 %, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with

band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

Method PM (Measurement using an RF average power meter):


- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power was measured using spectrum analyzer.

TEST SETUP



TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	November 11, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Standard Power Access Point The maximum power spectral density must not exceed 23 dBm e.i.r.p. in any 1-megahertz band.	5.925-6.425 GHz 6.525-6.875 GHz
	<input type="checkbox"/> Indoor Access Point The maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.	5.925-7.125 GHz
	<input type="checkbox"/> Subordinate Device The maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.	5.925-7.125 GHz
	<input type="checkbox"/> Client Devices, Operating Under The Control Of A Standard Power Access Point The maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band.	5.925-6.425 GHz 6.525-6.875 GHz
	<input checked="" type="checkbox"/> Client Devices, Operating Under The Control Of An Indoor Access Point The maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.	5.925-7.125 GHz

ISED RSS-248 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Standard Power Access Point The maximum e.i.r.p. spectral density shall not exceed 23 dBm/MHz	5.925-6.425 GHz 6.525-6.875 GHz
	<input type="checkbox"/> Low-Power Indoor Access-Points The maximum e.i.r.p. spectral density shall not exceed 5 dBm/MHz	5.925-7.125 GHz
	<input type="checkbox"/> Subordinate Device The maximum e.i.r.p. spectral density shall not exceed 5 dBm/MHz	5.925-7.125 GHz
	<input type="checkbox"/> Standard Client Devices The maximum e.i.r.p. spectral density shall not exceed 17 dBm/MHz	5.925-6.425 GHz 6.525-6.875 GHz
	<input checked="" type="checkbox"/> Low-Power Client Devices The maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz	5.925-7.125 GHz

TEST PROCEDURE


Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz reference bandwidth.

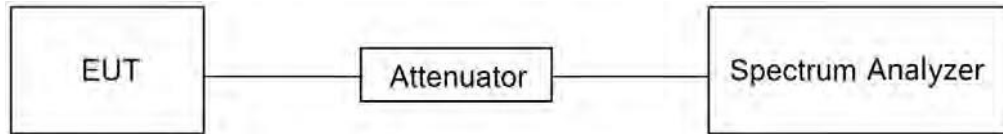TEST SETUP**TEST ENVIRONMENT**

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	November 11, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.5. IN-BAND EMISSIONS (MASK)

LIMITS

Please refer to CFR 47 FCC §15.407 (b) (7) and RSS-248 Issue 2, Clause 4.2 (b)

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.


TEST PROCEDURE

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 J.

Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.

2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

TEST SETUP

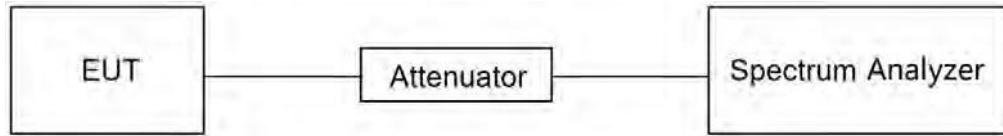

TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	November 11, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

7.6. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -20 °C ~ 50 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % ~ 75 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	T _N (Normal Temperature): 22.2 °C	T _L (Low Temperature): -20 °C
		T _H (High Temperature): 50 °C
Supply Voltage	V _N (Normal Voltage): DC 5 V	V _L (Low Voltage): DC 4.25 V
		V _H (High Voltage): DC 5.75 V

TEST SETUP

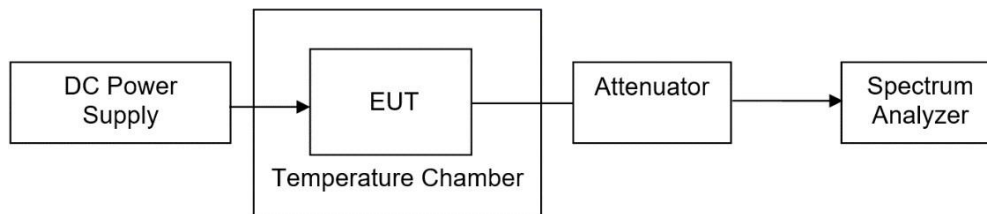

TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	December 12, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

7.7. CONTENTION-BASED PROTOCOL

LIMITS

Please refer to CFR 47 FCC §15.407 (d) (6) and RSS-248 Issue 2 Clause 4.7

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

a) Simulating Incumbent Signal

The incumbent signal is assumed to be noise-like. One example of such transmission could be Digital Video Broadcasting (DVB) systems that use Orthogonal Frequency Division Multiplexing (OFDM). Incumbent systems may also use different bandwidths for their transmissions. A 10 MHz-wide additive white Gaussian noise (AWGN) signal is selected to simulate and represent incumbent transmission.

b) Required number of tests

Incumbent and EUT (access point, subordinate or client) signals may occupy different portions of the channel. Depending on the EUT transmission bandwidth and incumbent signal center frequency (simulated by a 10 MHz-wide AWGN signal), the center frequency of the EUT signal f_{fcc1} may fall within the incumbent's occupied bandwidth (Figure 1.a), or outside of it (Figure 1.b).

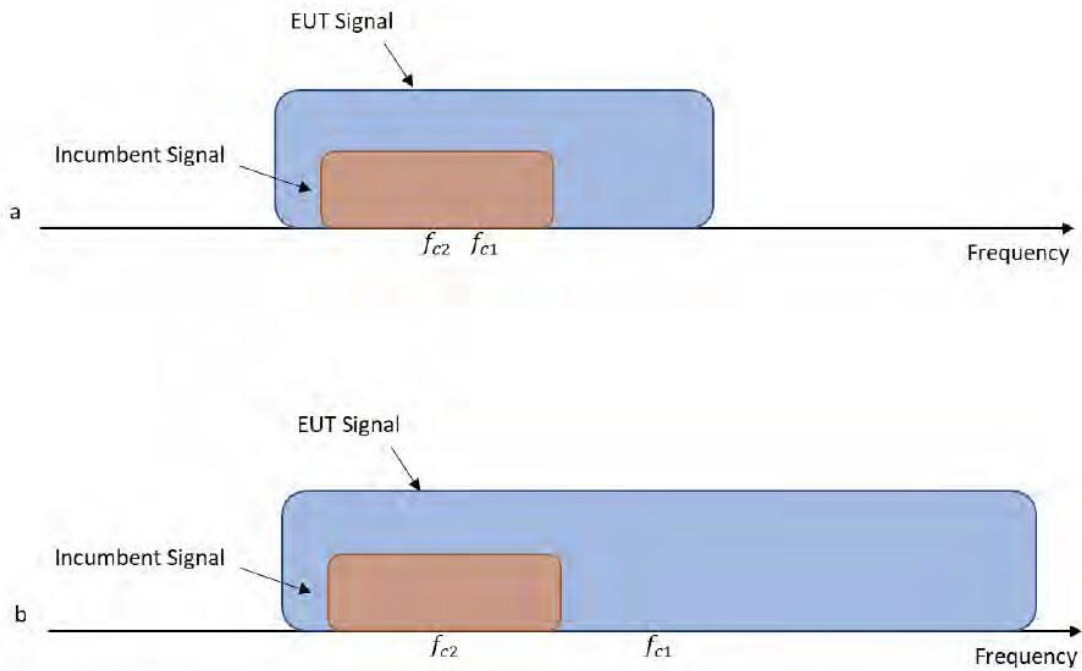


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{cc2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed;

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission


f_{c2} : Center frequency of simulated incumbent signal

TEST PROCEDURE

To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle. To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer 2 to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

TEST SETUP

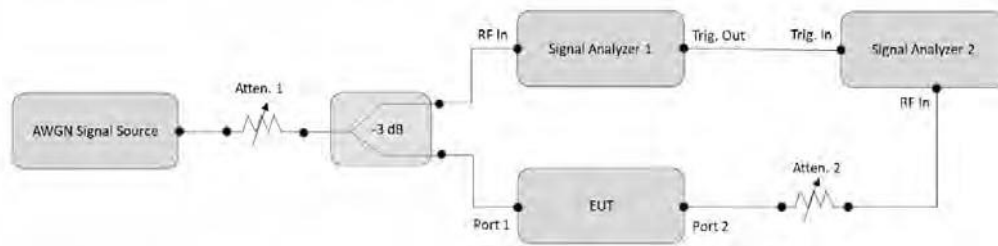

TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	December 21, 2023	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix H

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b) (6).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-248 4.6.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) (6) and ISED RSS-247 4.6.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

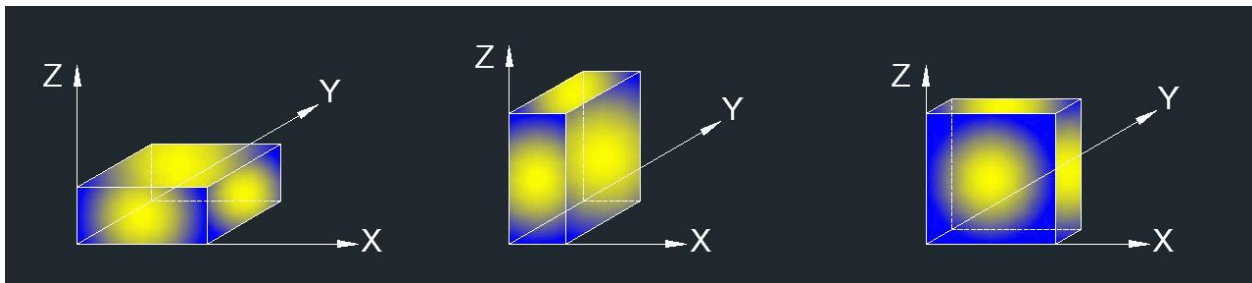

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $dBuA/m = dBuV/m - 20\log_{10}[120\pi] = dBuV/m - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 9 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (9 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

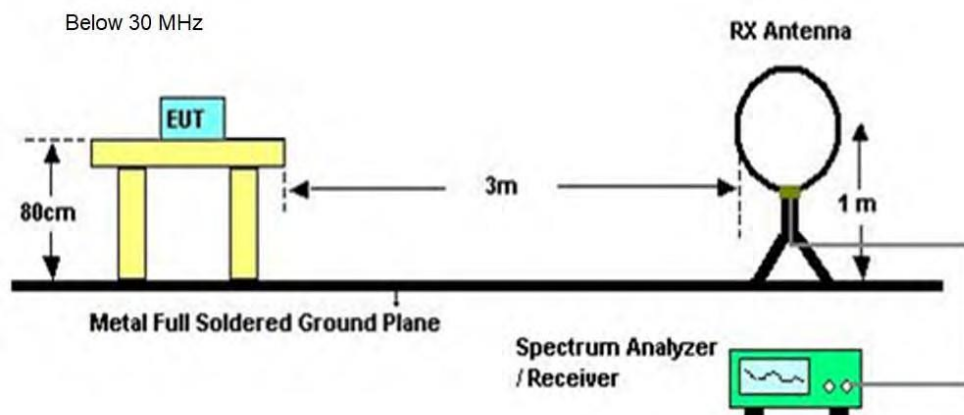

Below 1 GHz and above 30 MHz

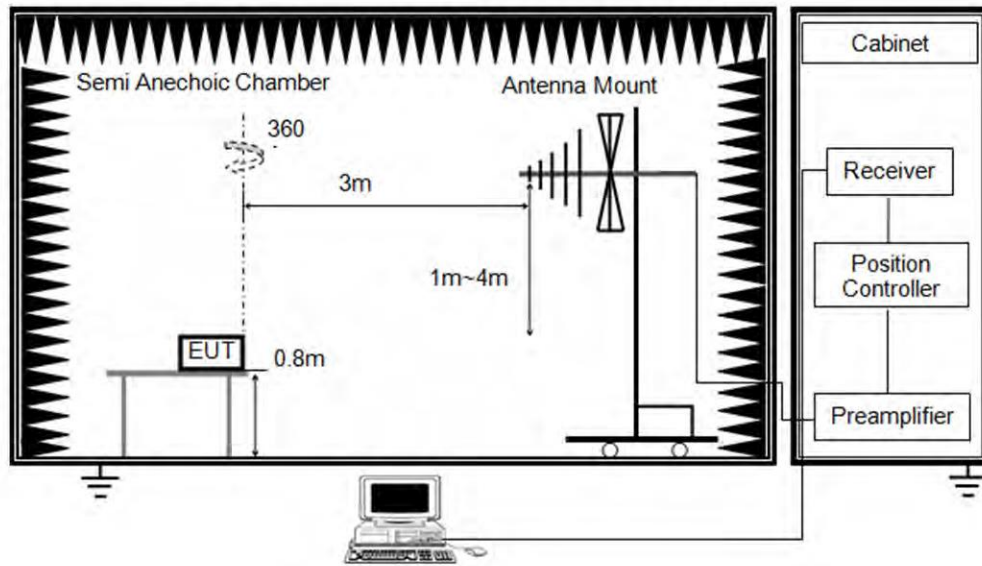

Above 1 GHz

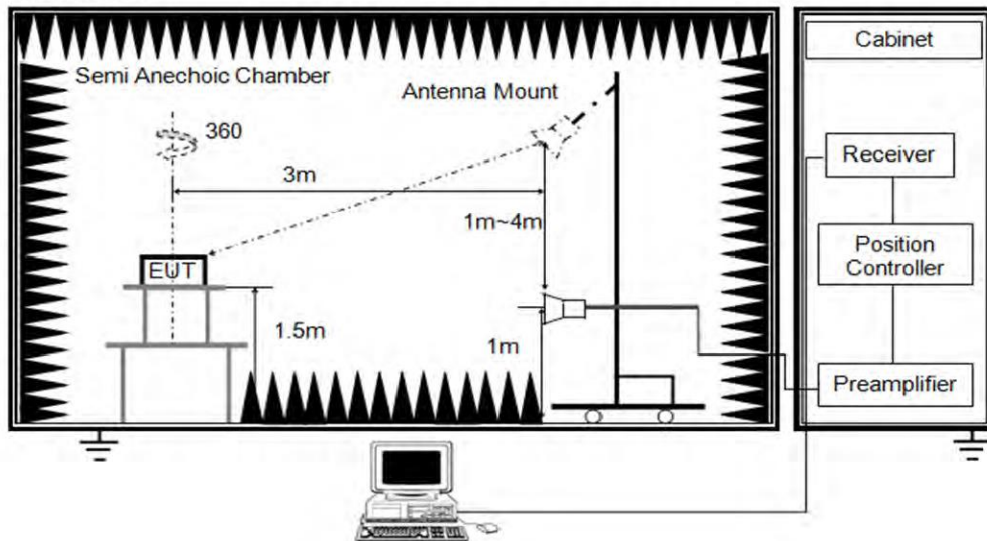

TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	59%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V


TEST DATE / ENGINEER

Test Date	December 20, 2023	Test By	Rex Huang
-----------	-------------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11a 20 PK	Frequency(MHz):	5975
Polarity:	Horizontal	Test Voltage:	DC 5V

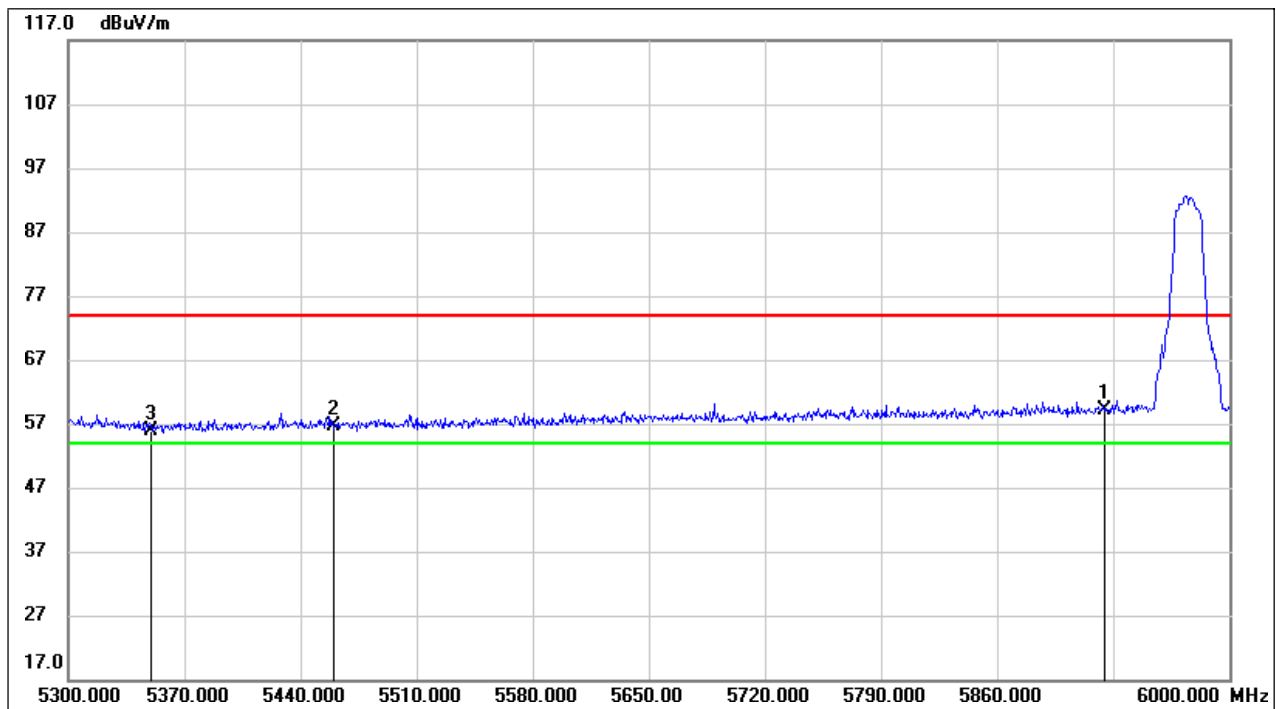


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	17.25	41.80	59.05	74.00	-14.95	peak
2	5460.000	15.96	40.62	56.58	74.00	-17.42	peak
3	5350.000	15.44	40.49	55.93	74.00	-18.07	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5975
Polarity:	Horizontal	Test Voltage:	DC 5V

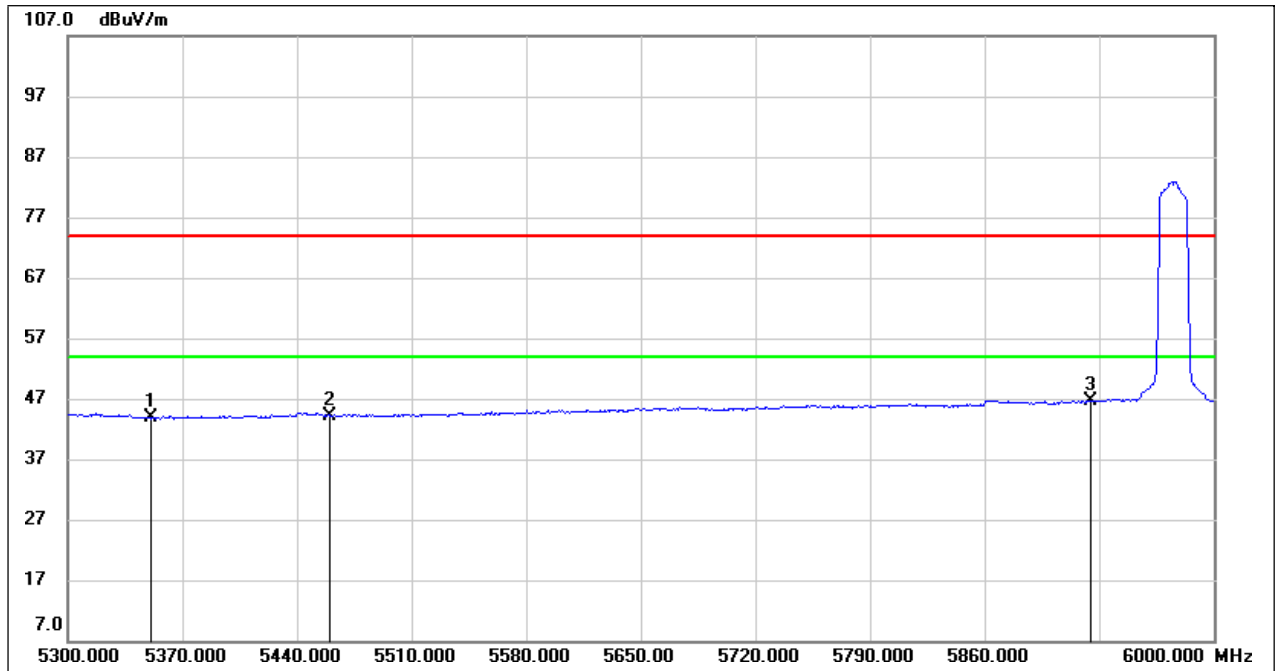


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.28	40.49	43.77	54.00	-10.23	AVG
2	5460.000	3.55	40.62	44.17	54.00	-9.83	AVG
3	5925.000	4.81	41.80	46.61	54.00	-7.39	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	7095
Polarity:	Horizontal	Test Voltage:	DC 5V

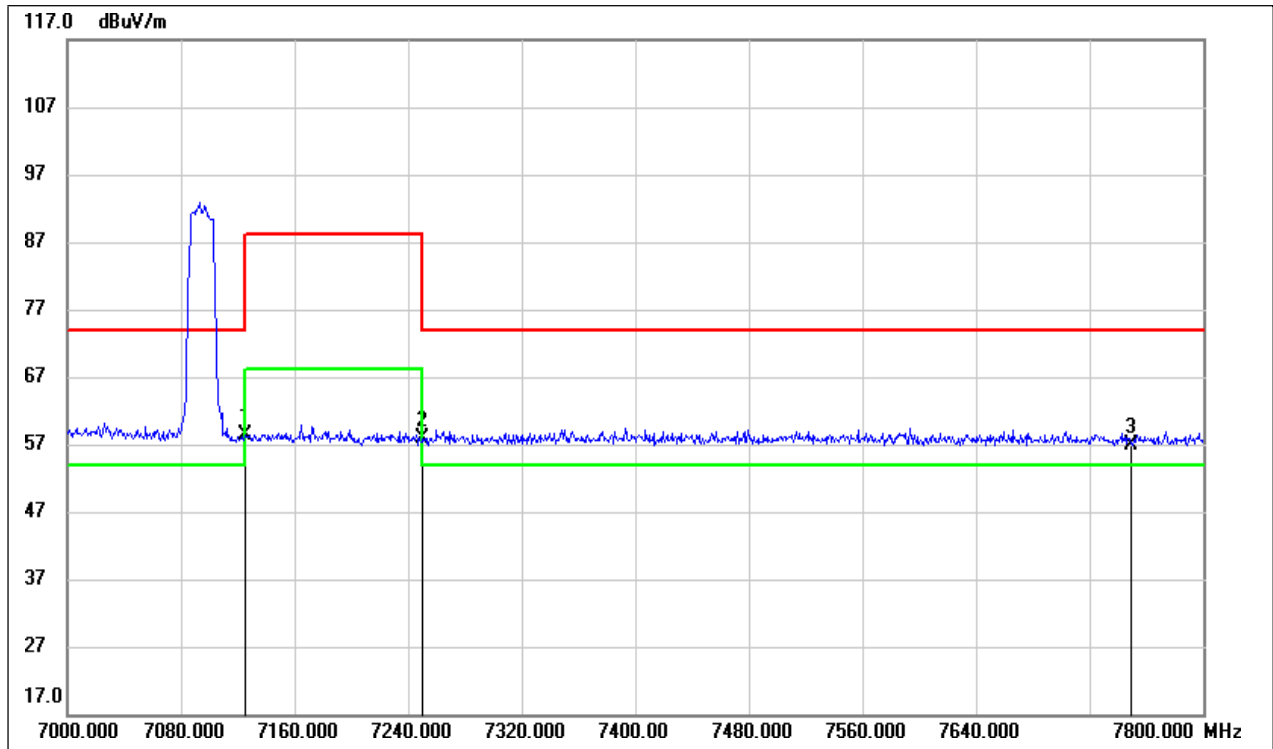


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	13.09	45.36	58.45	74.00	-15.55	peak
2	7250.000	12.56	45.27	57.83	74.00	-16.17	peak
3	7750.000	11.88	45.08	56.96	74.00	-17.04	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	7095
Polarity:	Horizontal	Test Voltage:	DC 5V

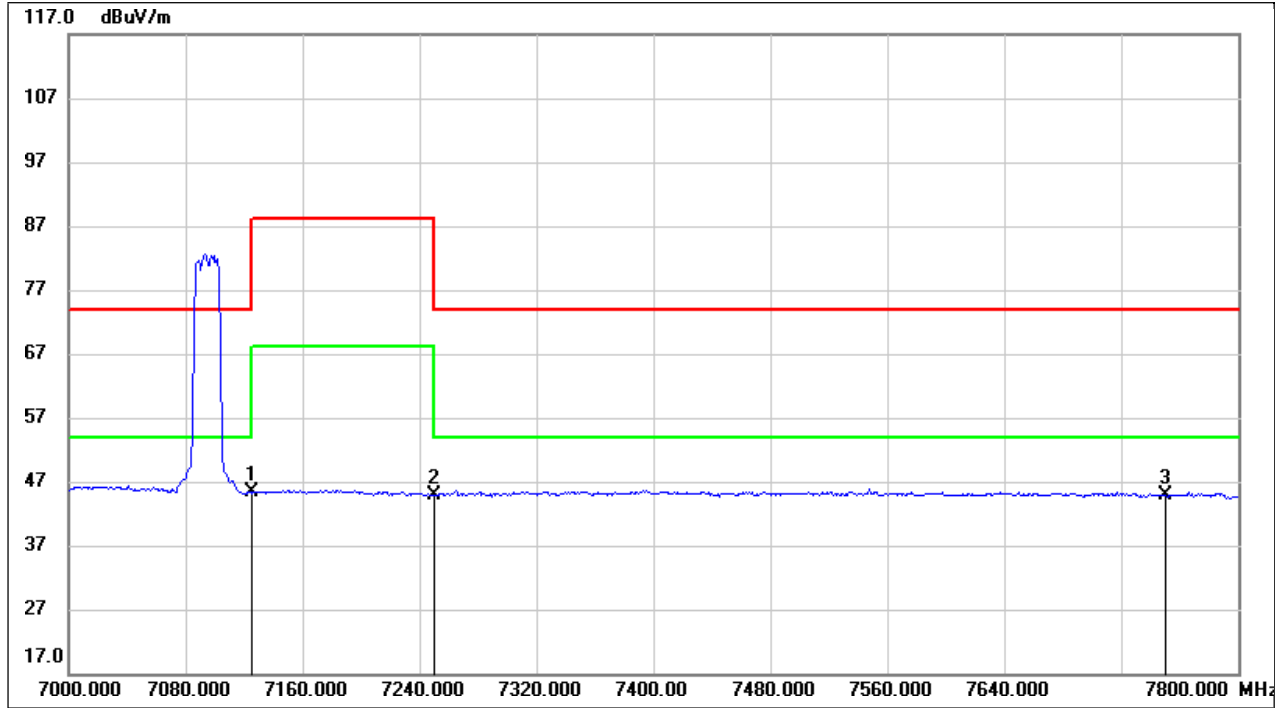


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	0.09	45.36	45.45	54.00	-8.55	AVG
2	7250.000	-0.45	45.27	44.82	54.00	-9.18	AVG
3	7750.000	-0.22	45.08	44.86	54.00	-9.14	AVG

Test Mode:	802.11ax HE20 PK (26Tone Ru0)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

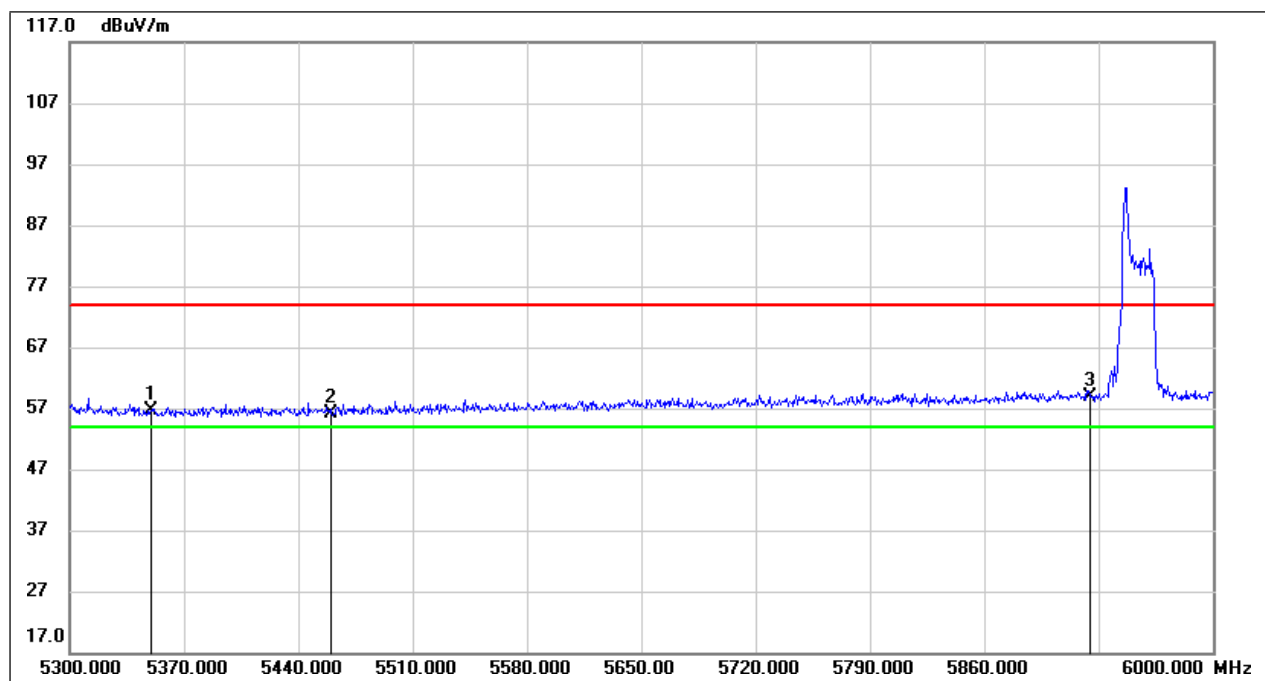


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	16.23	40.49	56.72	74.00	-17.28	peak
2	5460.000	15.52	40.62	56.14	74.00	-17.86	peak
3	5925.000	17.08	41.80	58.88	74.00	-15.12	peak

Test Mode:	802.11ax HE20 AV (26Tone Ru0)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

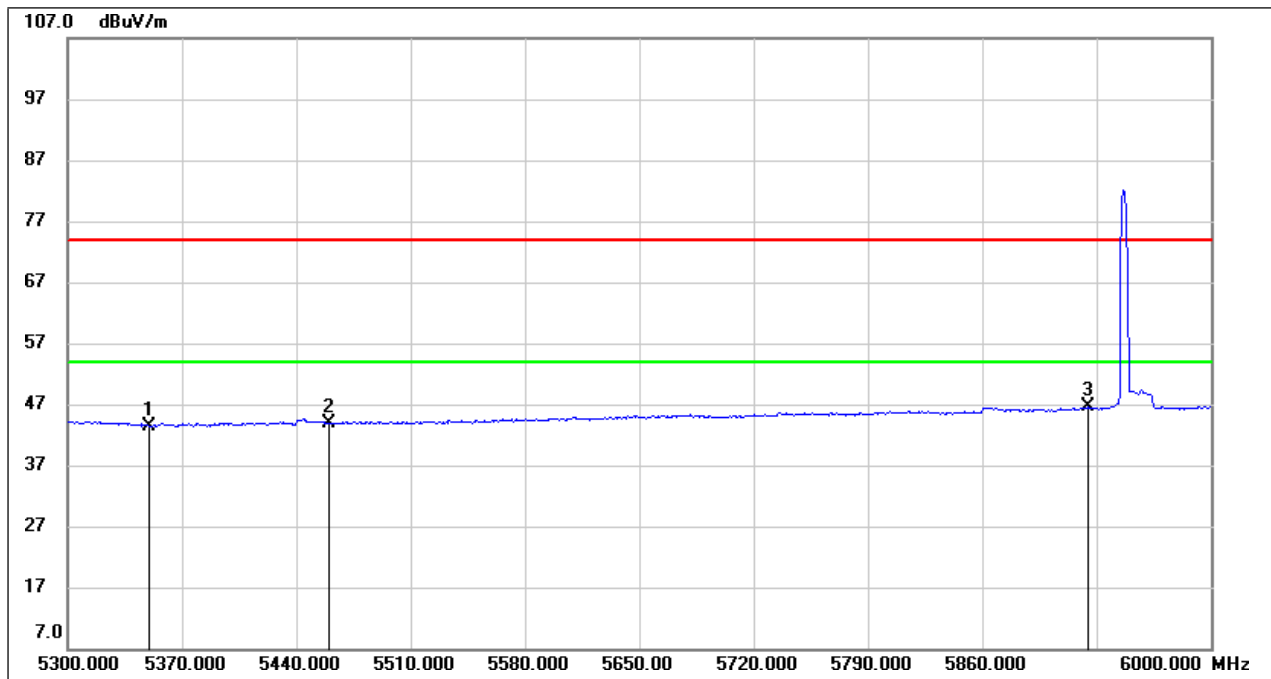


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	2.88	40.49	43.37	54.00	-10.63	AVG
2	5460.000	3.29	40.62	43.91	54.00	-10.09	AVG
3	5925.000	4.73	41.80	46.53	54.00	-7.47	AVG

Test Mode:	802.11ax HE20 PK (52Tone Ru37)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

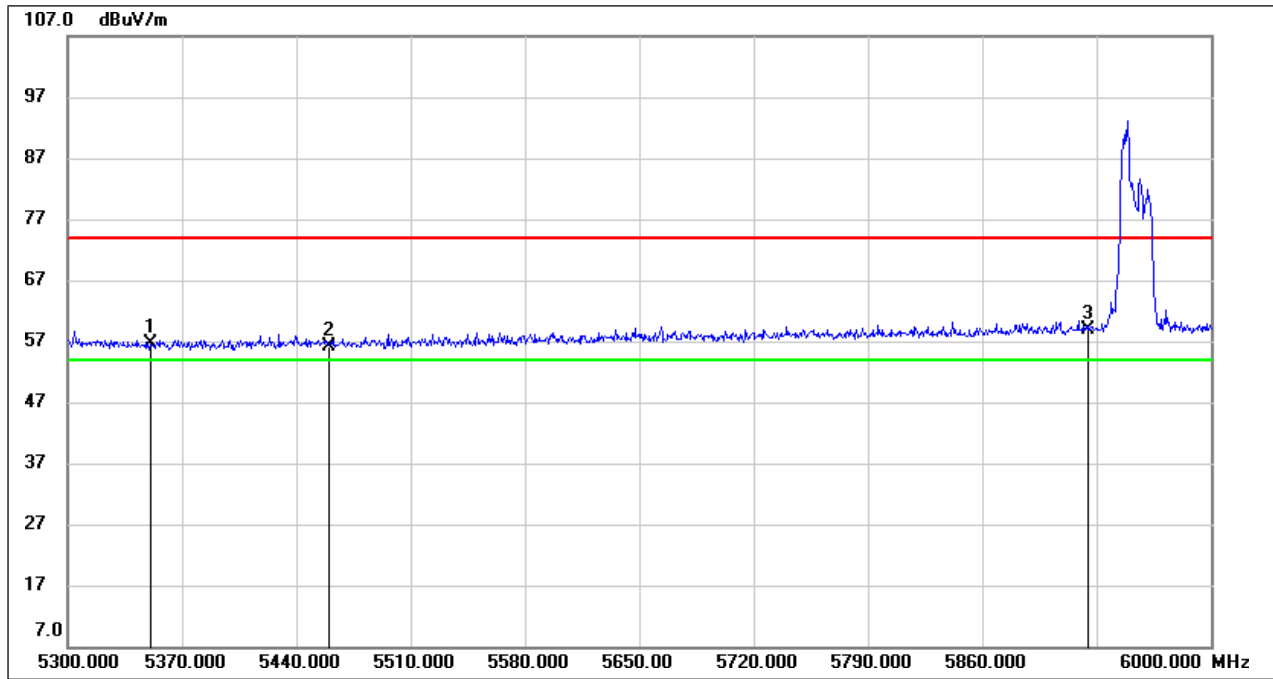


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	16.02	40.49	56.51	74.00	-17.49	peak
2	5460.000	15.63	40.62	56.25	74.00	-17.75	peak
3	5925.000	17.17	41.80	58.97	74.00	-15.03	peak

Test Mode:	802.11ax HE20 AV (52Tone Ru37)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

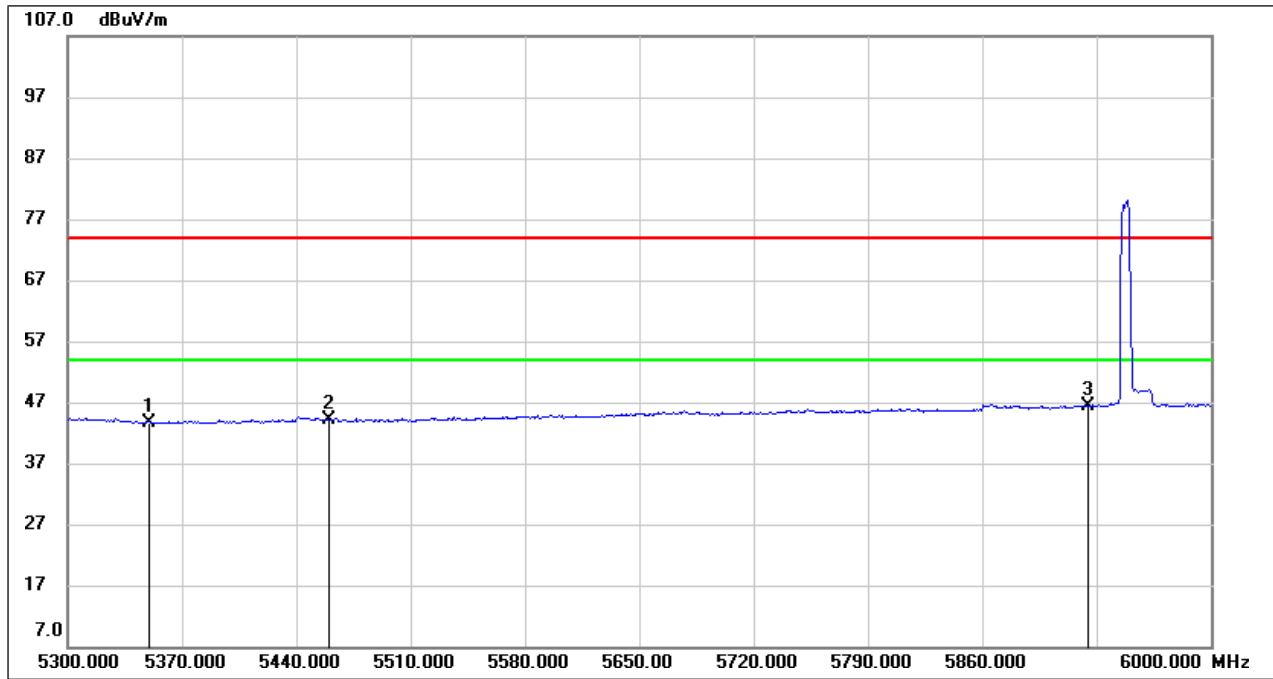


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.10	40.49	43.59	54.00	-10.41	AVG
2	5460.000	3.52	40.62	44.14	54.00	-9.86	AVG
3	5925.000	4.55	41.80	46.35	54.00	-7.65	AVG

Test Mode:	802.11ax HE20 PK (106Tone Ru53)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

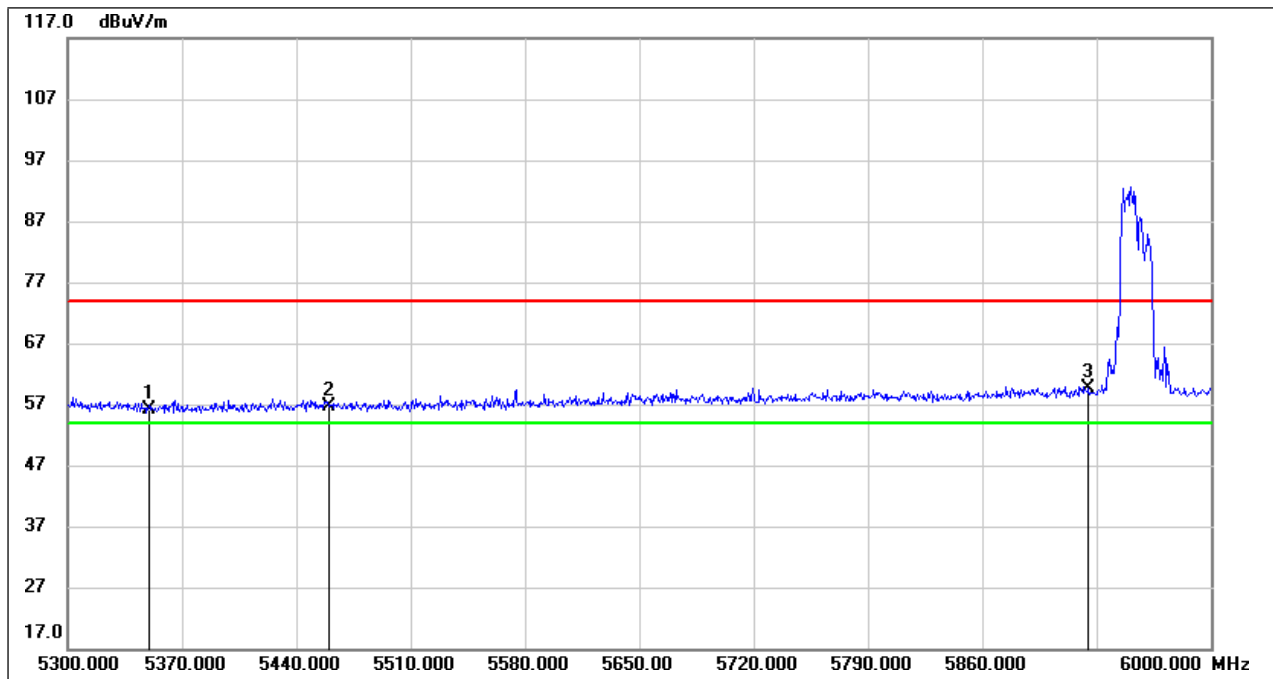


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.72	40.49	56.21	74.00	-17.79	peak
2	5460.000	16.11	40.62	56.73	74.00	-17.27	peak
3	5925.000	17.71	41.80	59.51	74.00	-14.49	peak

Test Mode:	802.11ax HE20 AV (106Tone Ru53)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

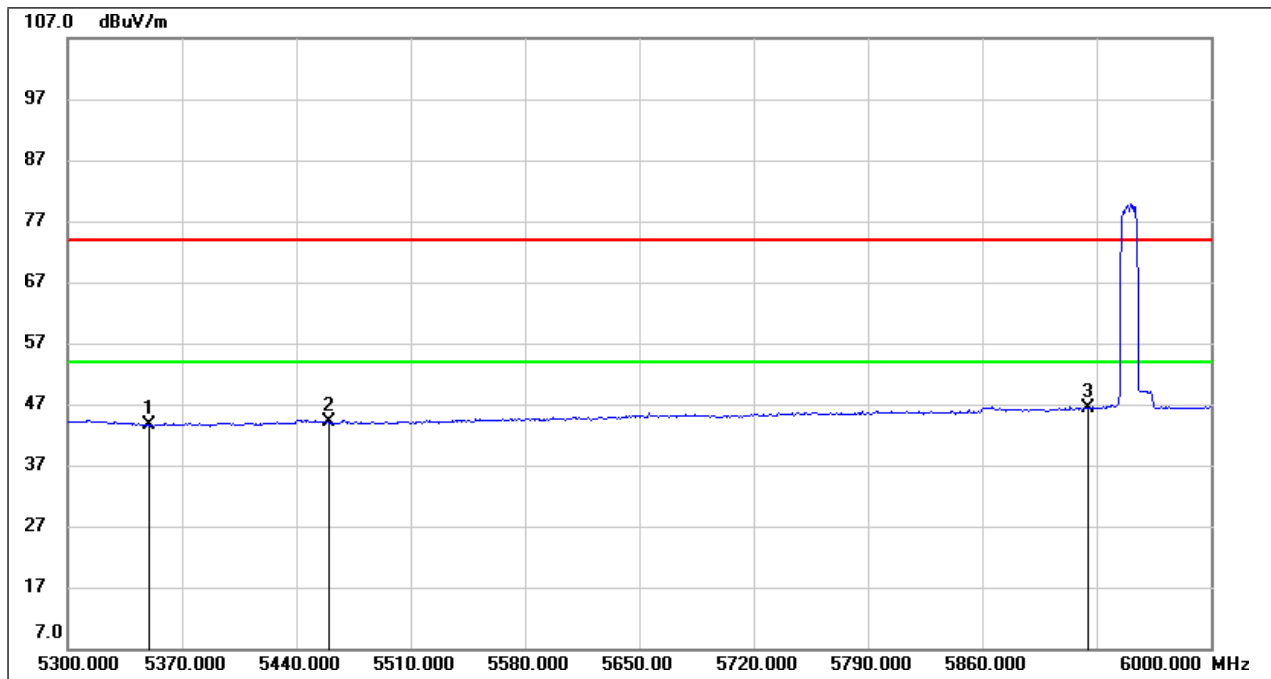


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.05	40.49	43.54	54.00	-10.46	AVG
2	5460.000	3.43	40.62	44.05	54.00	-9.95	AVG
3	5925.000	4.54	41.80	46.34	54.00	-7.66	AVG

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

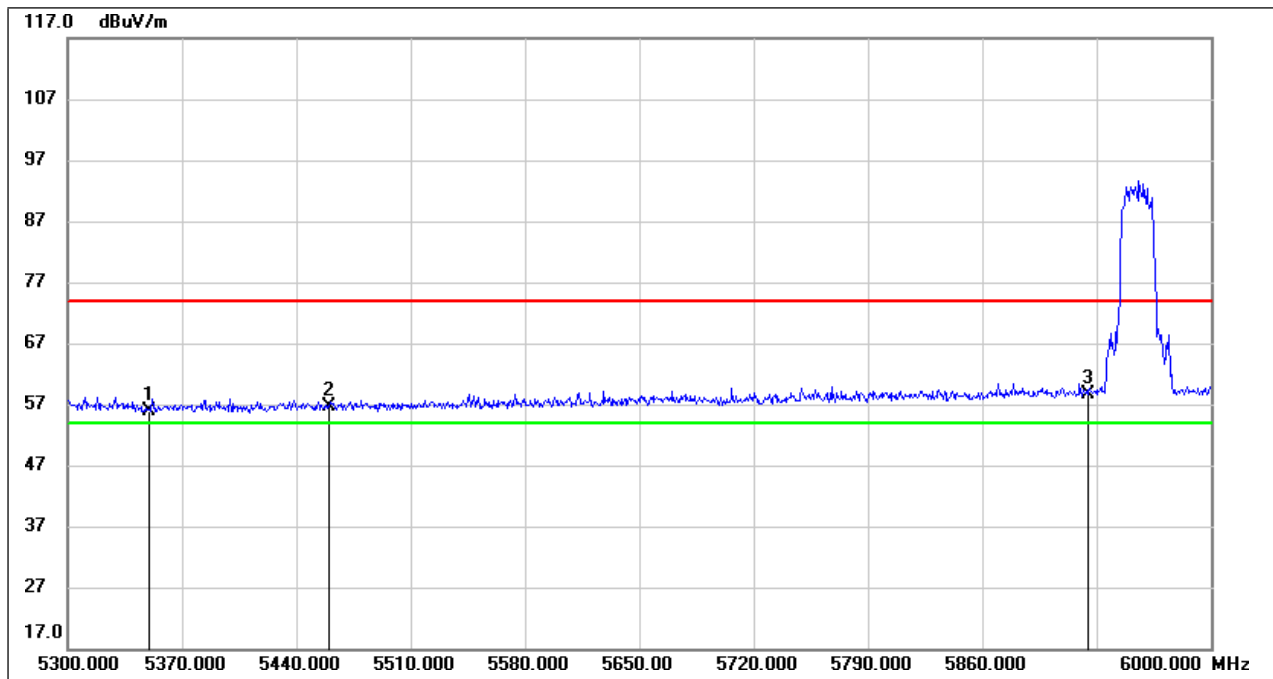


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.27	40.49	55.76	74.00	-18.24	peak
2	5460.000	16.06	40.62	56.68	74.00	-17.32	peak
3	5925.000	16.91	41.80	58.71	74.00	-15.29	peak

Test Mode:	802.11ax HE20 AV (242Tone Ru61)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

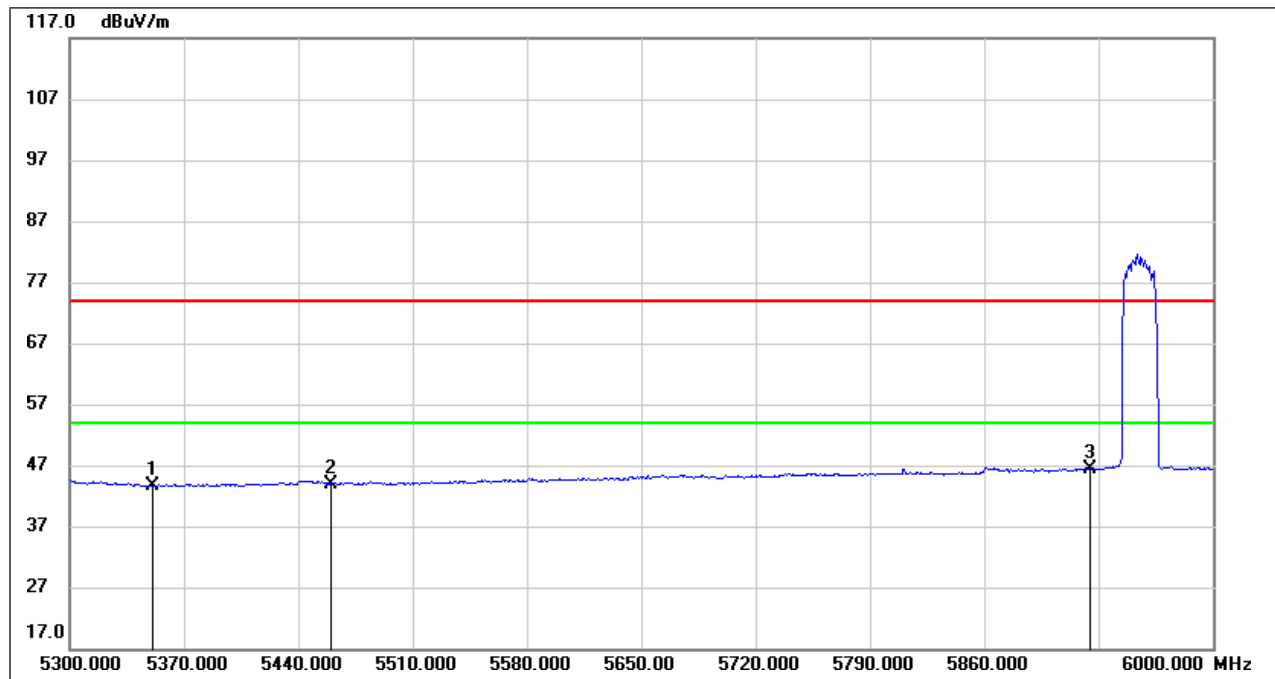


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.11	40.49	43.60	54.00	-10.40	AVG
2	5460.000	3.32	40.62	43.94	54.00	-10.06	AVG
3	5925.000	4.60	41.80	46.40	54.00	-7.60	AVG

Test Mode:	802.11ax HE20 PK (26Tone Ru8)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

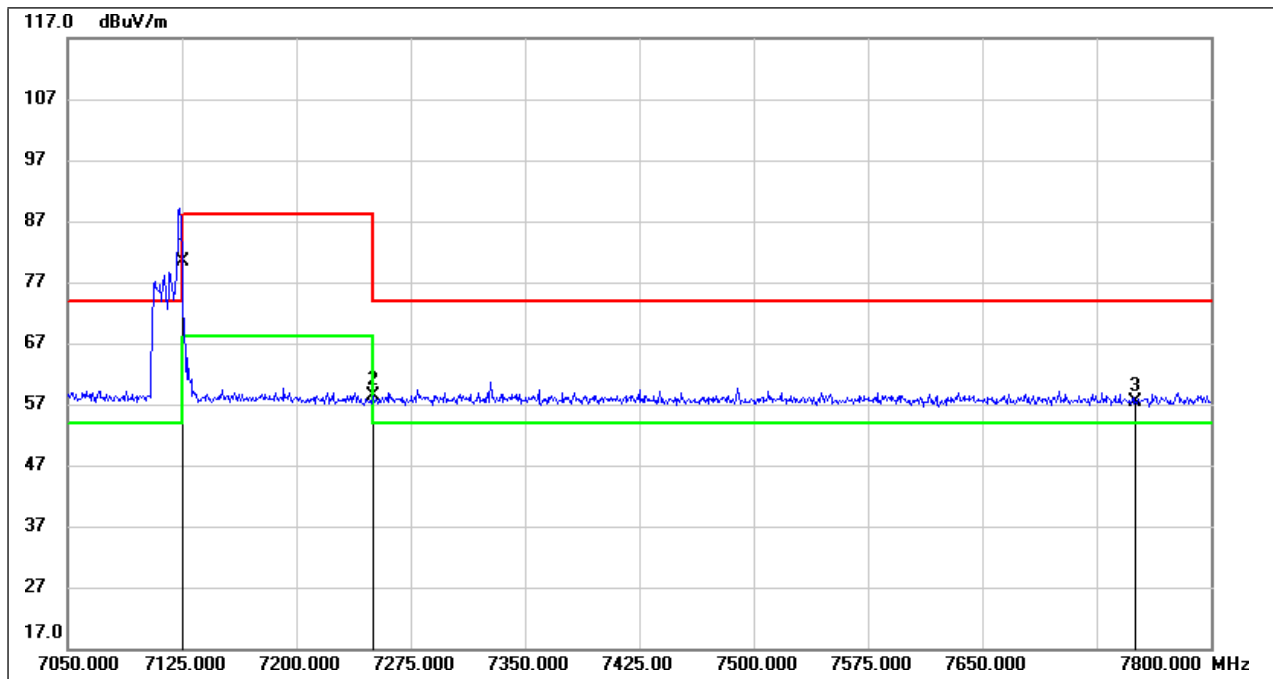


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	35.01	45.36	80.37	88.20	-8.83	peak
2	7250.000	13.06	45.27	58.33	74.00	-15.67	peak
3	7750.000	12.28	45.08	57.36	74.00	-16.64	peak

Test Mode:	802.11ax HE20 AV (26Tone Ru8)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

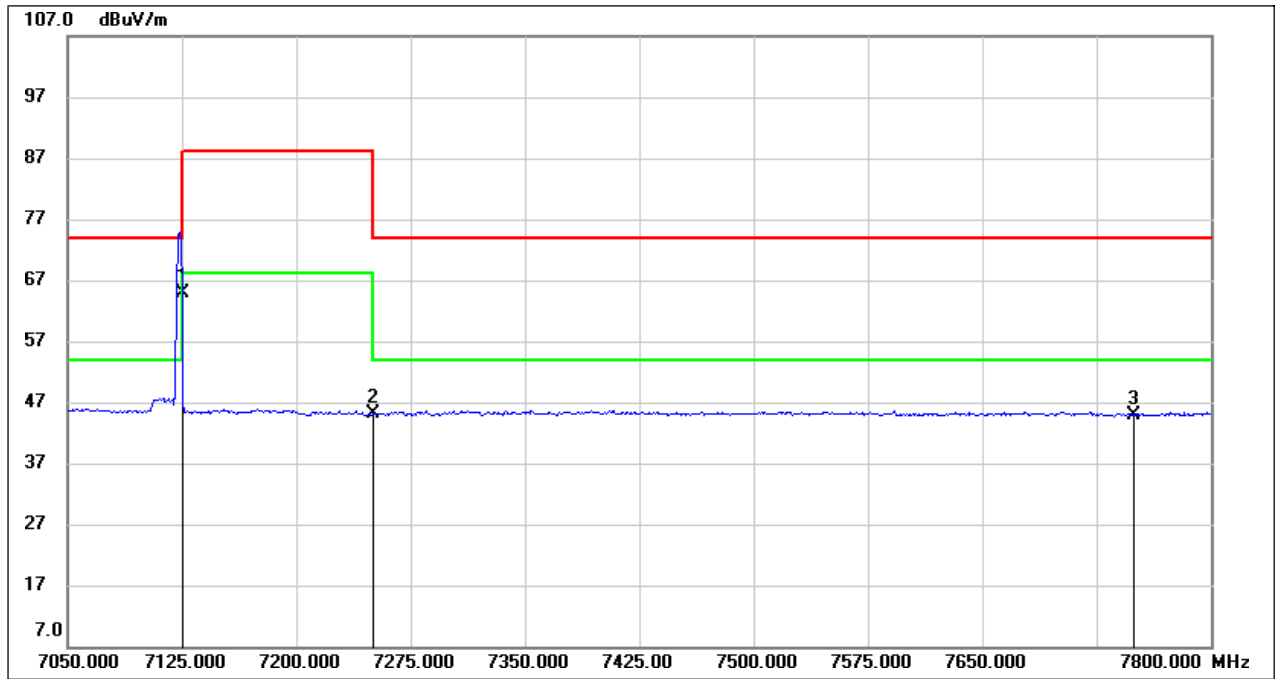


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	19.52	45.36	64.88	68.2	-3.32	AVG
2	7250.000	-0.21	45.27	45.06	54.00	-8.94	AVG
3	7750.000	-0.14	45.08	44.94	54.00	-9.06	AVG

Test Mode:	802.11ax HE20 PK (52Tone Ru40)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

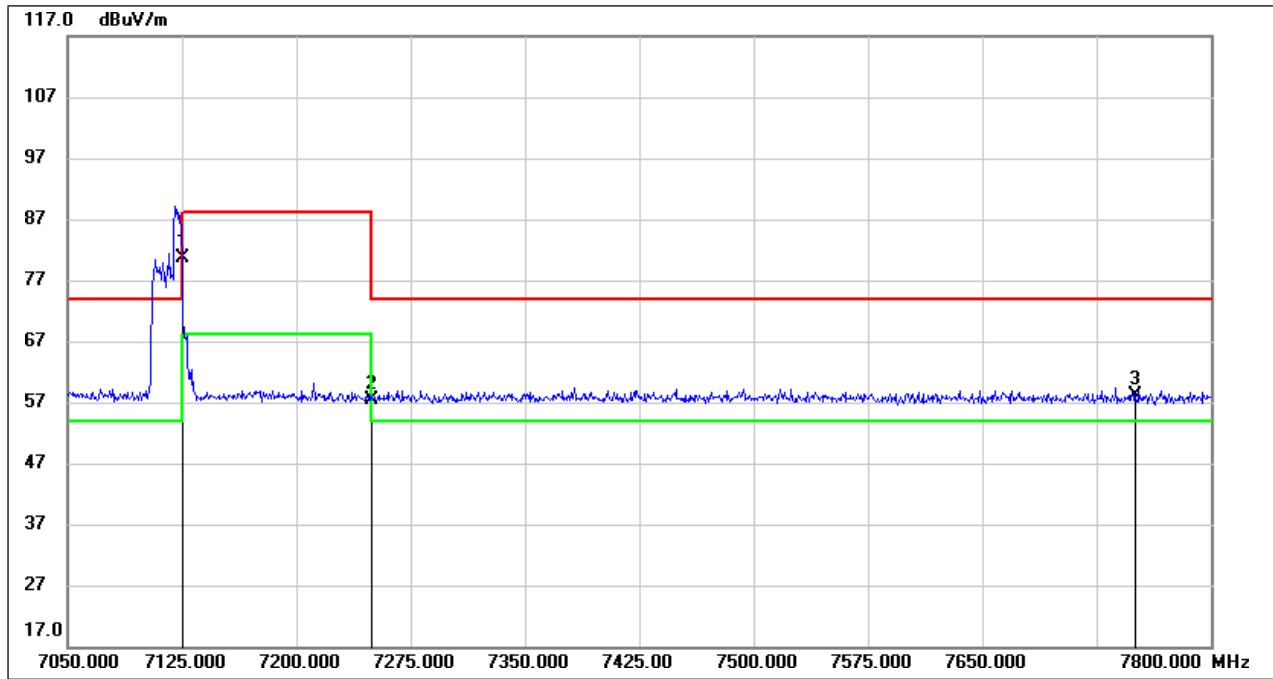


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	35.30	45.36	80.66	88.20	-7.54	peak
2	7250.000	11.99	45.27	57.26	74.00	-16.74	peak
3	7750.000	12.98	45.08	58.06	74.00	-15.94	peak

Test Mode:	802.11ax HE20 AV (52Tone Ru40)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

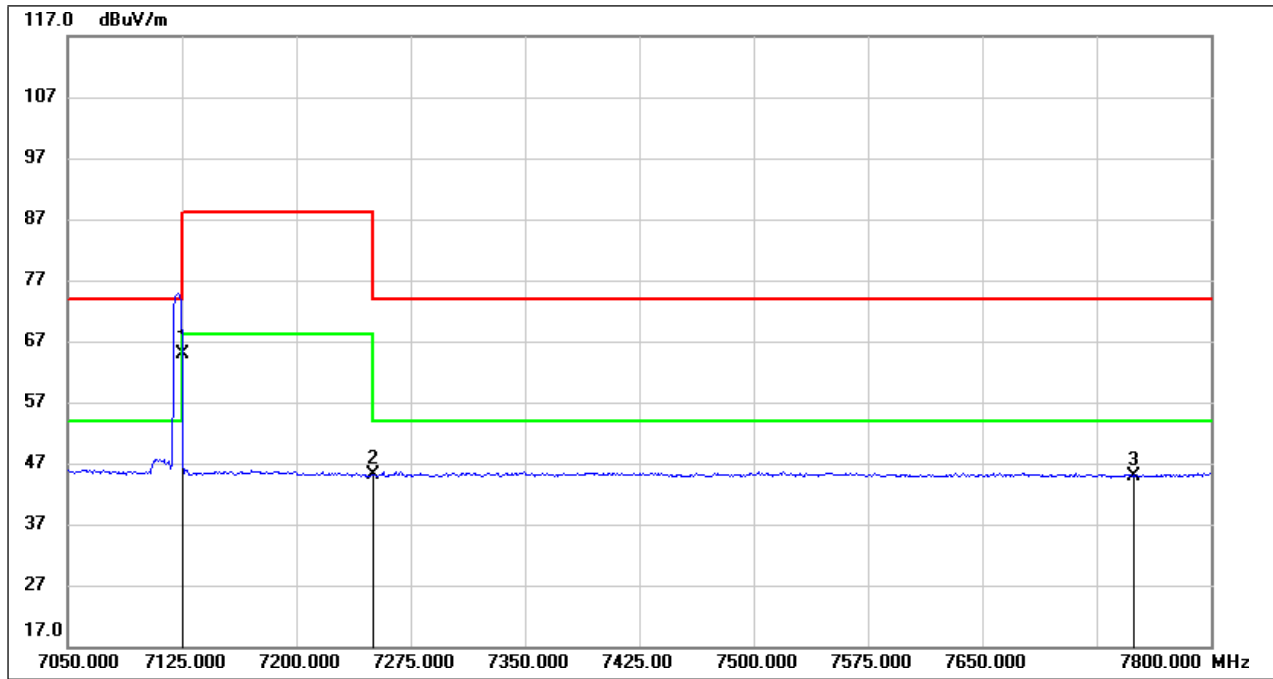


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	19.42	45.36	64.78	68.20	-3.42	AVG
2	7250.000	-0.15	45.27	45.12	54.00	-8.88	AVG
3	7750.000	-0.12	45.08	44.96	54.00	-9.04	AVG

Test Mode:	802.11ax HE20 PK (106Tone Ru54)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

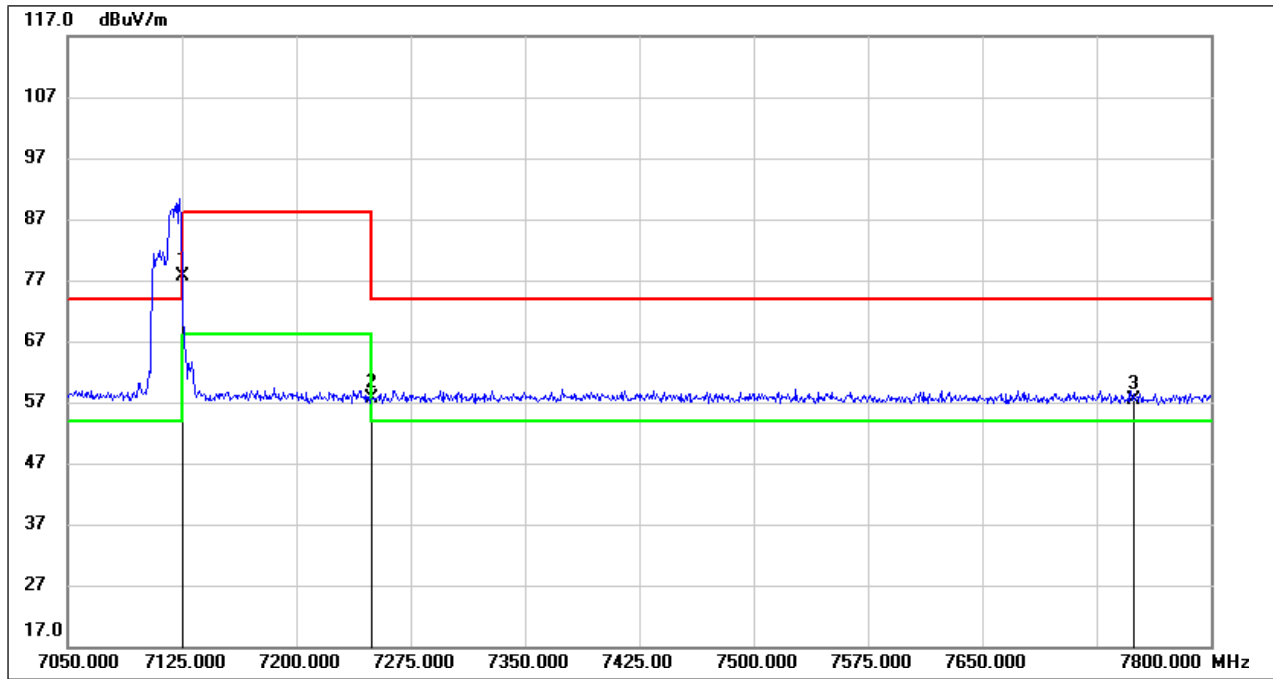


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	32.36	45.36	77.72	88.20	-10.48	peak
2	7250.000	12.29	45.27	57.56	74.00	-16.44	peak
3	7750.000	12.38	45.08	57.46	74.00	-16.54	peak

Test Mode:	802.11ax HE20 AV (106Tone Ru54)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

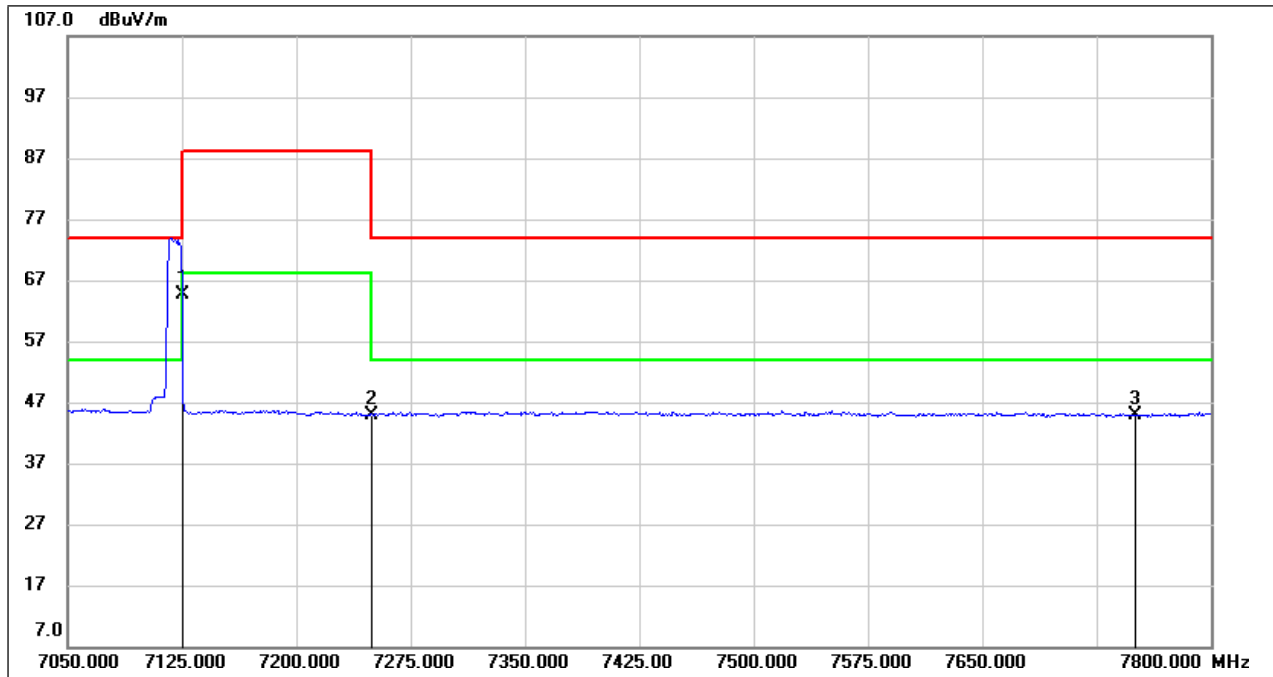


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	19.32	45.36	64.68	68.20	-3.52	AVG
2	7250.000	-0.33	45.27	44.94	54.00	-9.06	AVG
3	7750.000	-0.18	45.08	44.90	54.00	-9.10	AVG

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

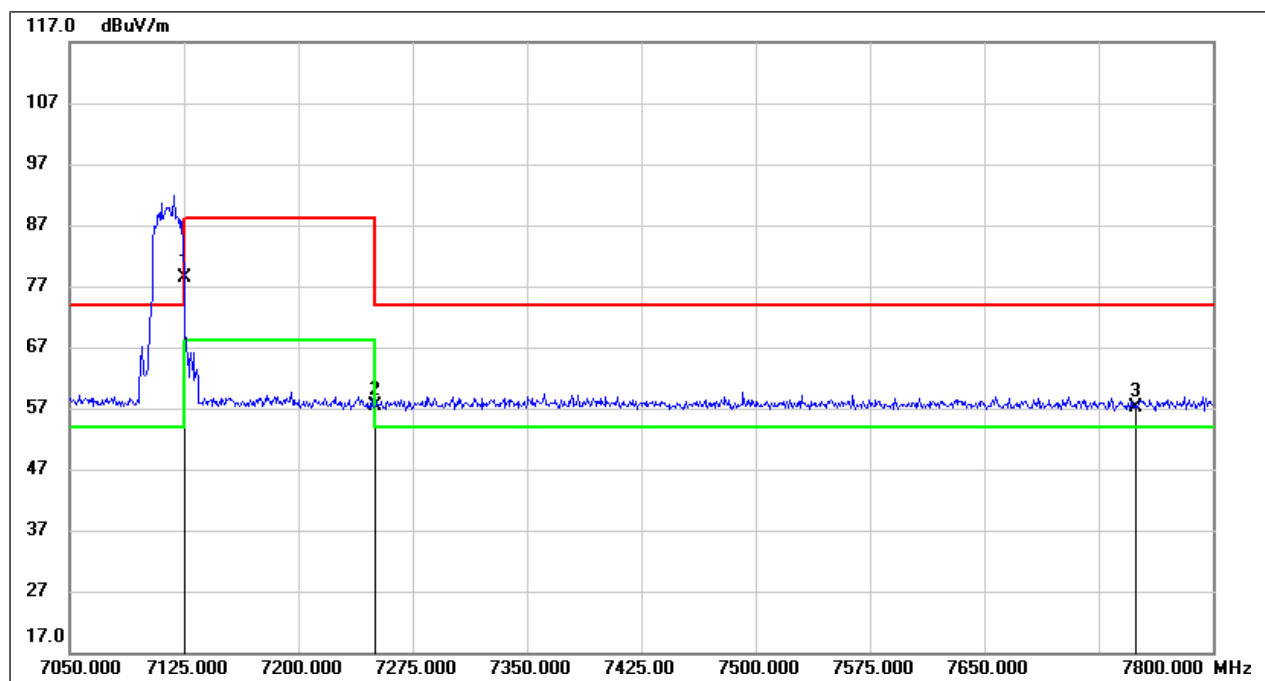


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	33.03	45.36	78.39	88.20	-9.81	peak
2	7250.000	12.10	45.27	57.37	74.00	-16.63	peak
3	7750.000	12.06	45.08	57.14	74.00	-16.86	peak

Test Mode:	802.11ax HE20 AV (242Tone Ru61)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

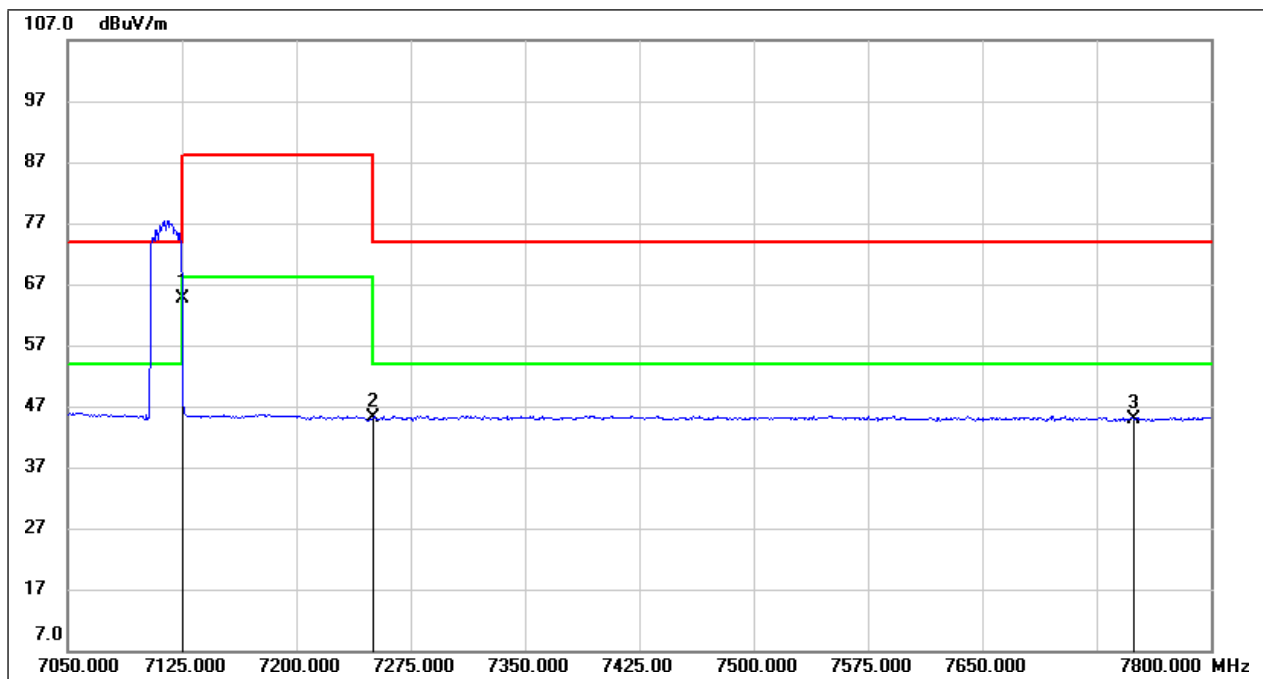


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	19.20	45.36	64.56	68.20	-3.64	AVG
2	7250.000	-0.21	45.27	45.06	54.00	-8.94	AVG
3	7750.000	-0.29	45.08	44.79	54.00	-9.21	AVG

Test Mode:	802.11ax HE40 PK (26Tone Ru0)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

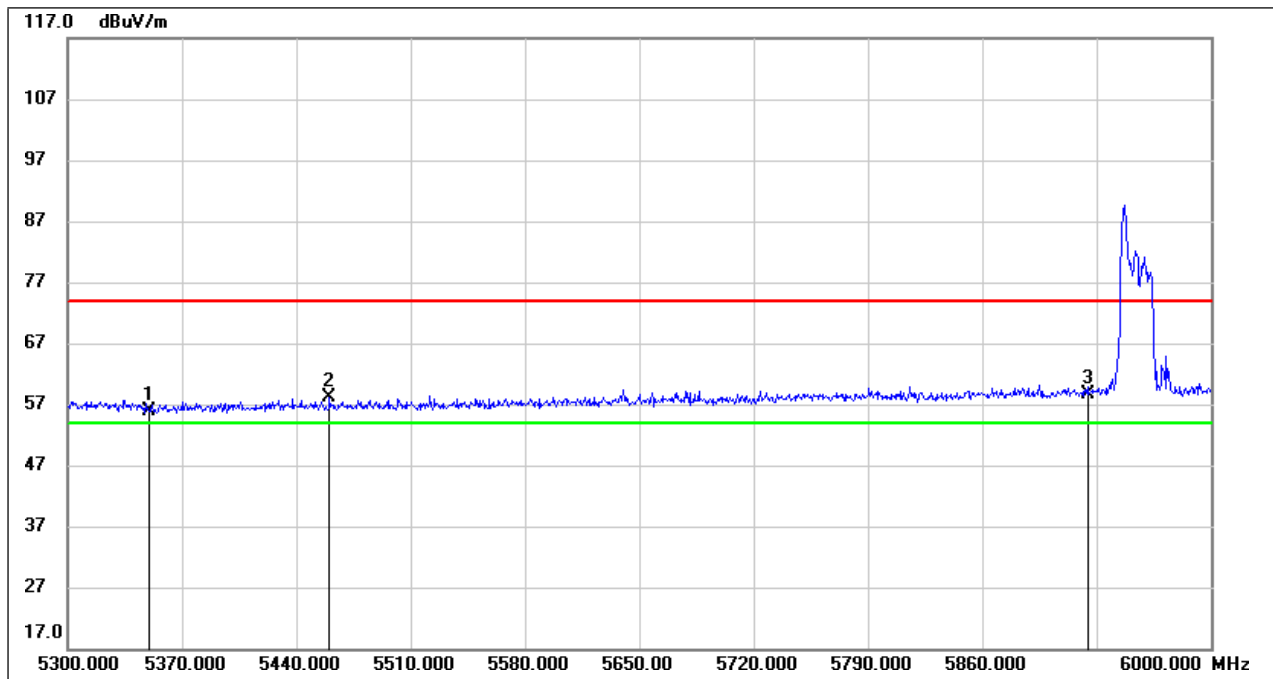


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.37	40.49	55.86	74.00	-18.14	peak
2	5460.000	17.43	40.62	58.05	74.00	-15.95	peak
3	5925.000	16.87	41.80	58.67	74.00	-15.33	peak

Test Mode:	802.11ax HE40 AV (26Tone Ru0)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

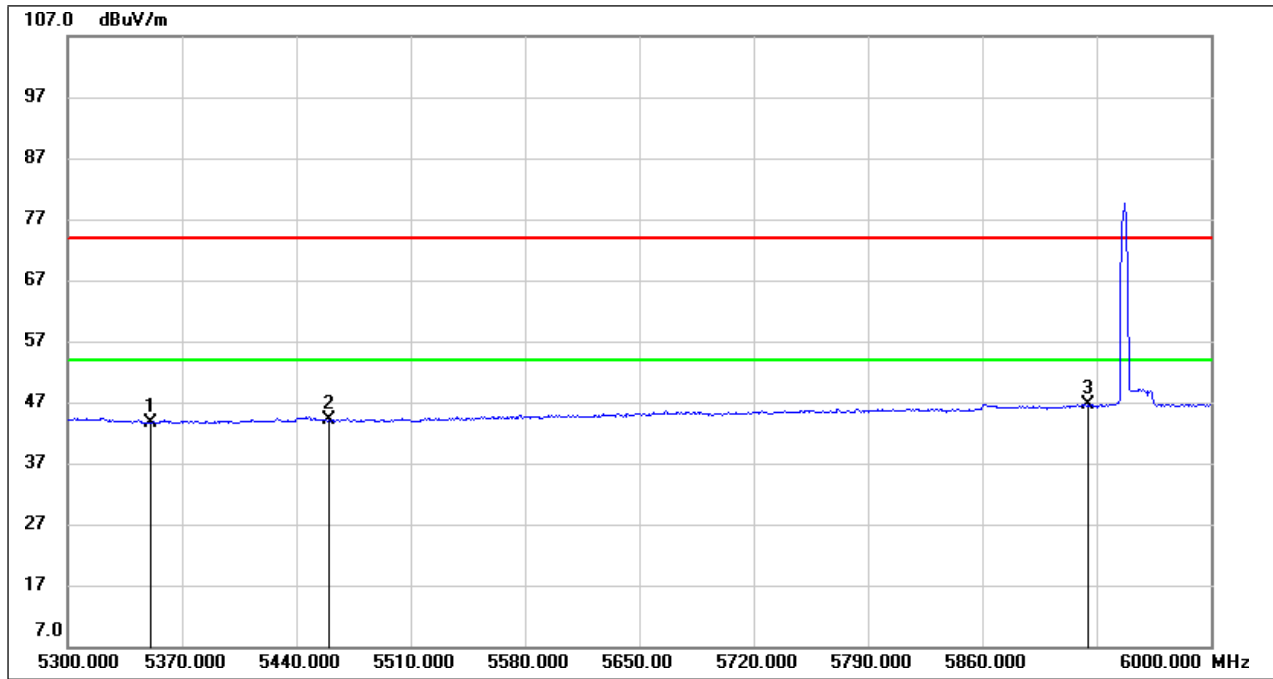


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.11	40.49	43.60	54.00	-10.40	AVG
2	5460.000	3.40	40.62	44.02	54.00	-9.98	AVG
3	5925.000	4.71	41.80	46.51	54.00	-7.49	AVG

Test Mode:	802.11ax HE40 PK (52Tone Ru37)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

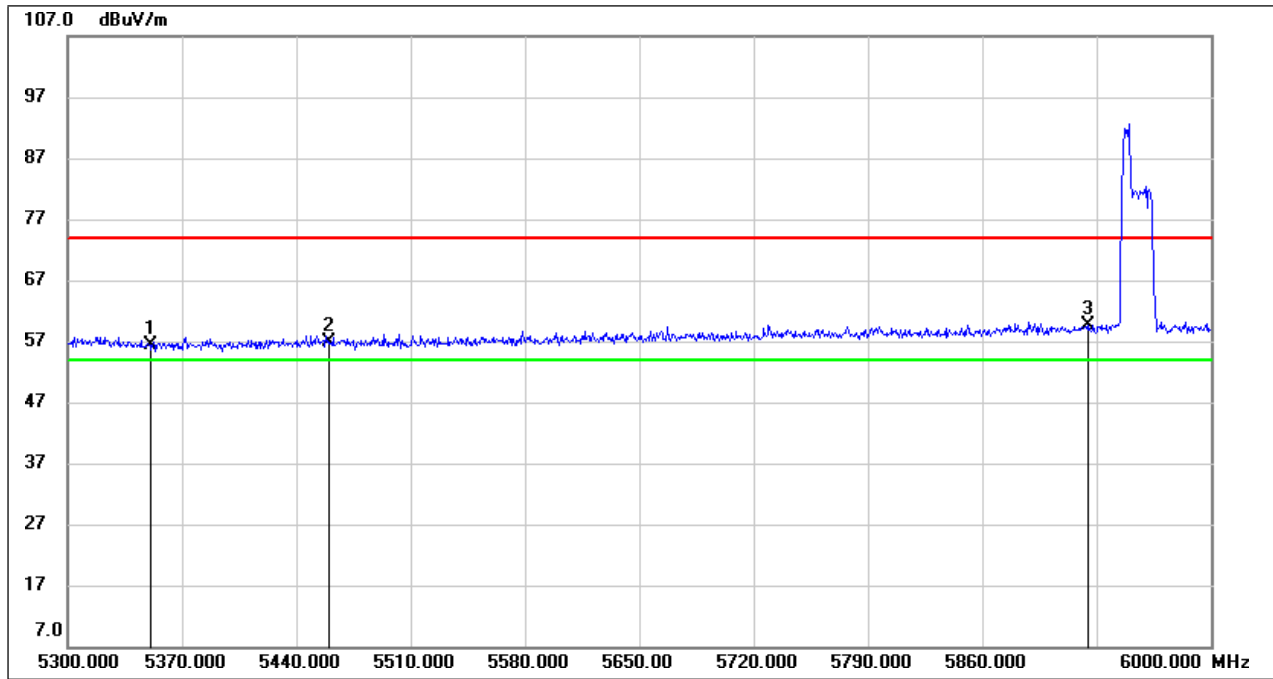


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.92	40.49	56.41	74.00	-17.59	peak
2	5460.000	16.15	40.62	56.77	74.00	-17.23	peak
3	5925.000	17.94	41.80	59.74	74.00	-14.26	peak

Test Mode:	802.11ax HE40 AV (52Tone Ru37)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

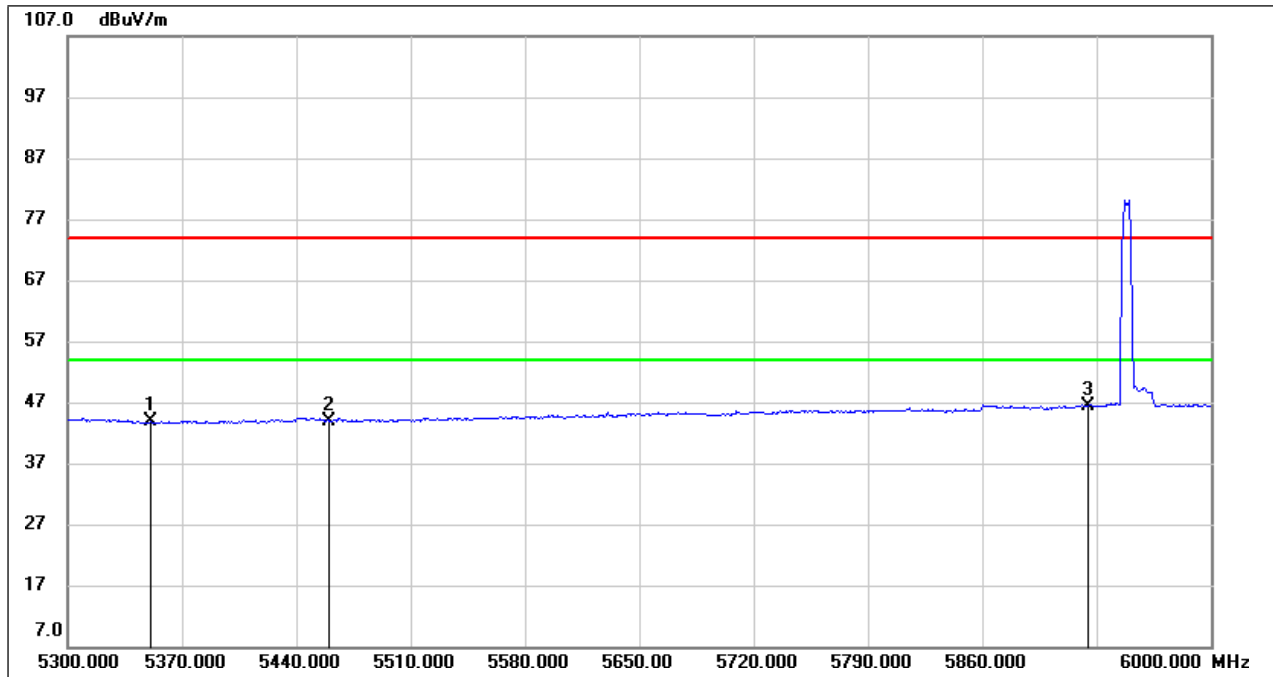


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.36	40.49	43.85	54.00	-10.15	AVG
2	5460.000	3.36	40.62	43.98	54.00	-10.02	AVG
3	5925.000	4.54	41.80	46.34	54.00	-7.66	AVG

Test Mode:	802.11ax HE40 PK (106Tone Ru53)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

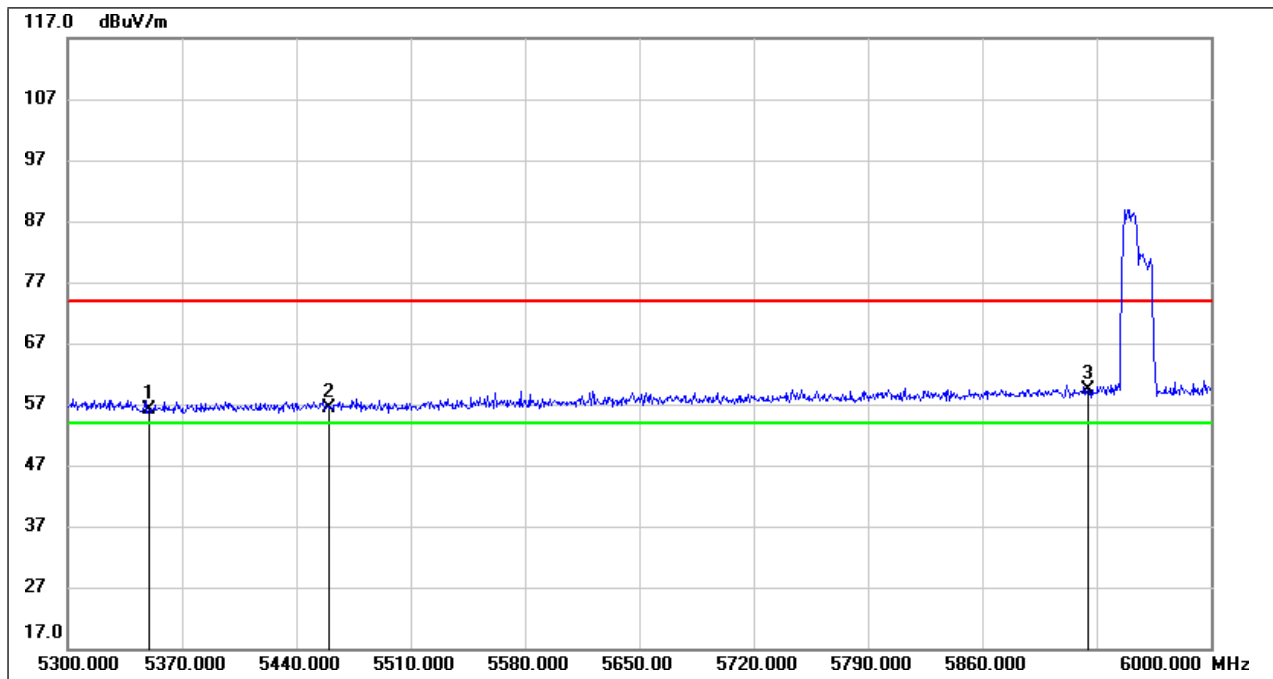


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.52	40.49	56.01	74.00	-17.99	peak
2	5460.000	15.87	40.62	56.49	74.00	-17.51	peak
3	5925.000	17.70	41.80	59.50	74.00	-14.50	peak

Test Mode:	802.11ax HE40 AV (106Tone Ru53)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

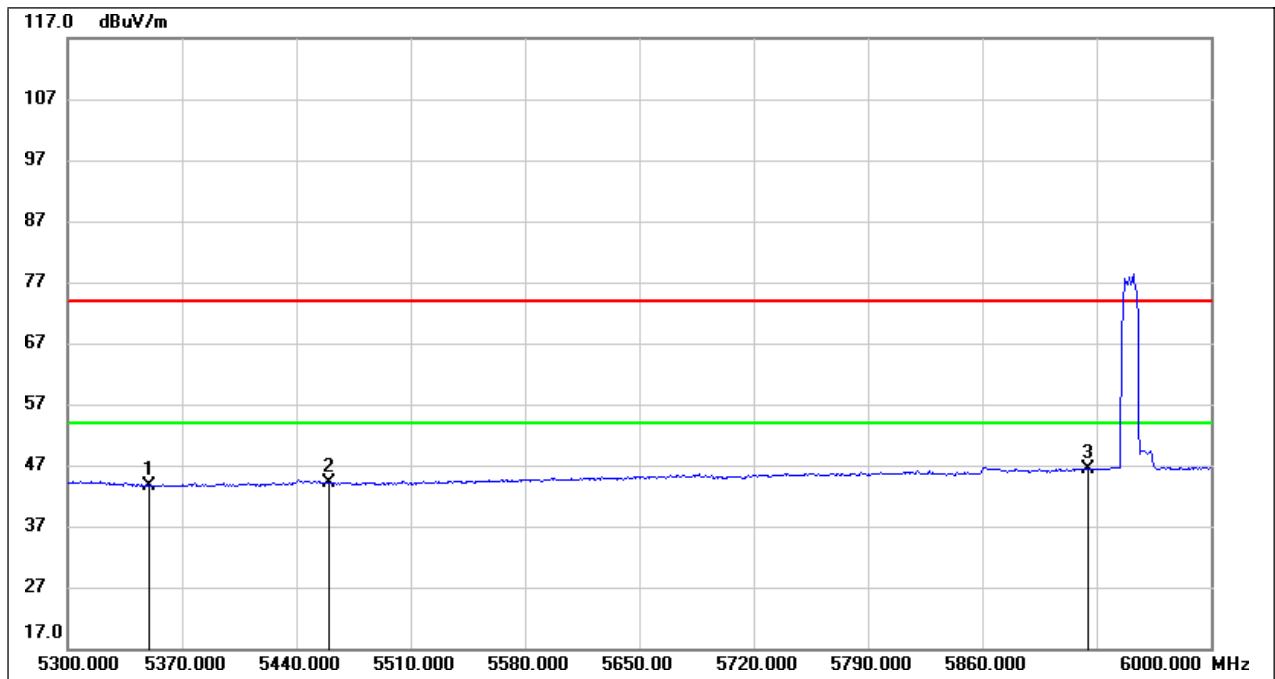


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.13	40.49	43.62	54.00	-10.38	AVG
2	5460.000	3.47	40.62	44.09	54.00	-9.91	AVG
3	5925.000	4.57	41.80	46.37	54.00	-7.63	AVG

Test Mode:	802.11ax HE40 PK (242Tone Ru61)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

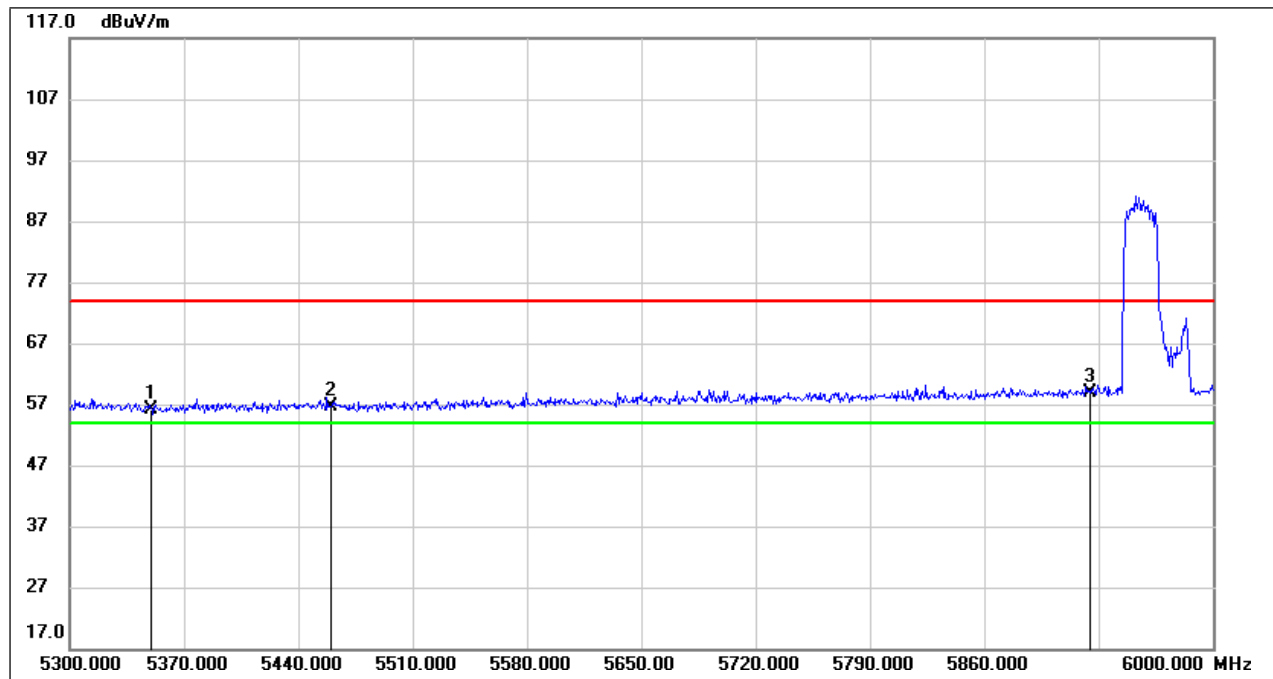


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.73	40.49	56.22	74.00	-17.78	peak
2	5460.000	16.13	40.62	56.75	74.00	-17.25	peak
3	5925.000	17.12	41.80	58.92	74.00	-15.08	peak

Test Mode:	802.11ax HE40 AV (242Tone Ru61)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

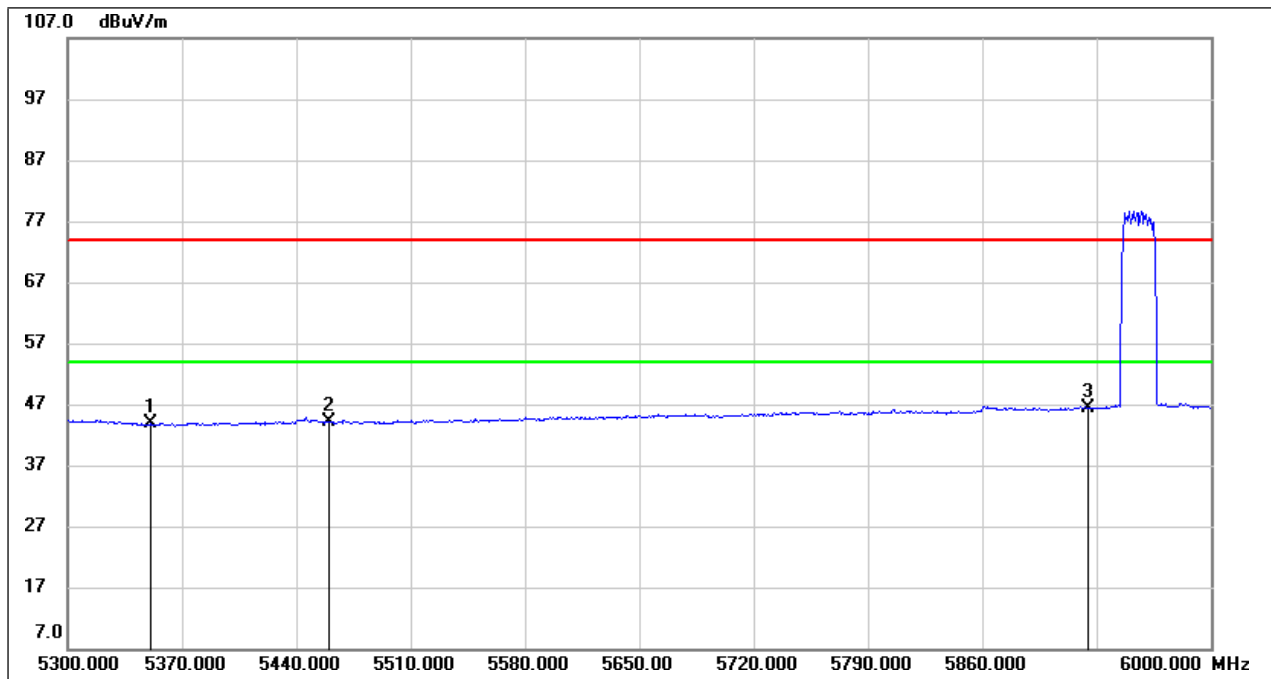


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.35	40.49	43.84	54.00	-10.16	AVG
2	5460.000	3.42	40.62	44.04	54.00	-9.96	AVG
3	5925.000	4.55	41.80	46.35	54.00	-7.65	AVG

Test Mode:	802.11ax HE40 PK (484Tone Ru65)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

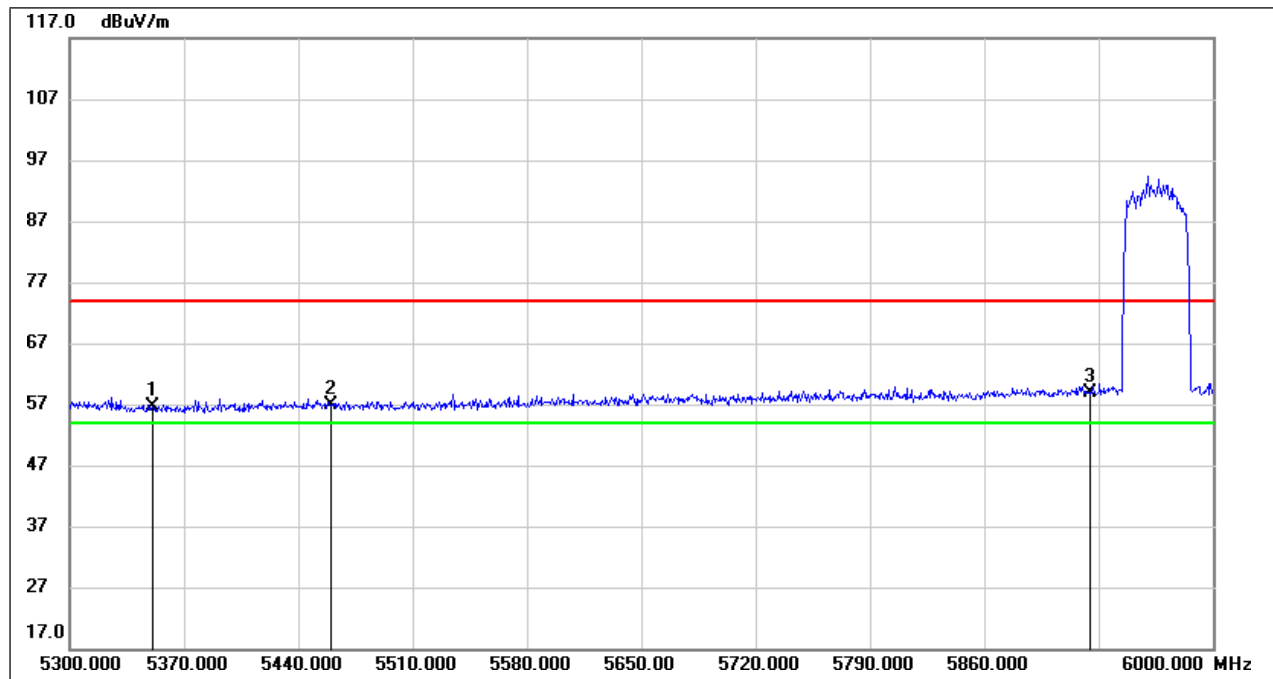


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	16.09	40.49	56.58	74.00	-17.42	peak
2	5460.000	16.32	40.62	56.94	74.00	-17.06	peak
3	5925.000	17.07	41.80	58.87	74.00	-15.13	peak

Test Mode:	802.11ax HE40 AV (484Tone Ru65)	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

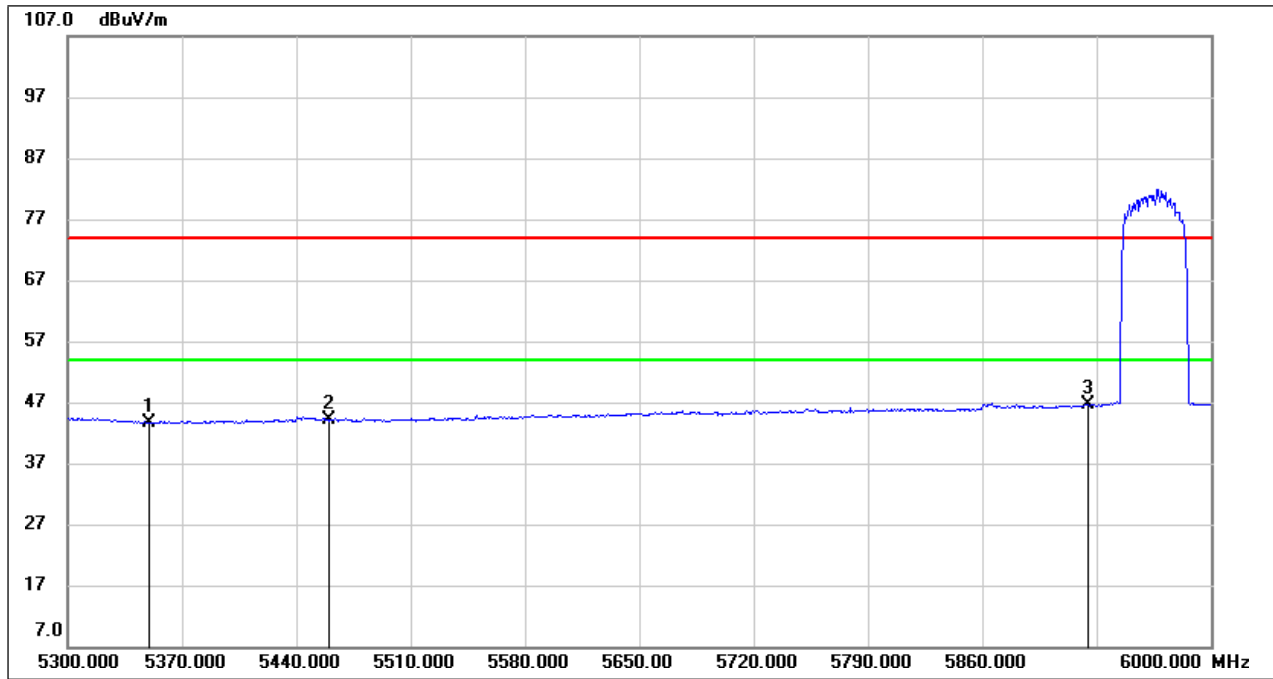


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.09	40.49	43.58	54.00	-10.42	AVG
2	5460.000	3.42	40.62	44.04	54.00	-9.96	AVG
3	5925.000	4.84	41.80	46.64	54.00	-7.36	AVG

Test Mode:	802.11ax HE40 PK (26Tone Ru17)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

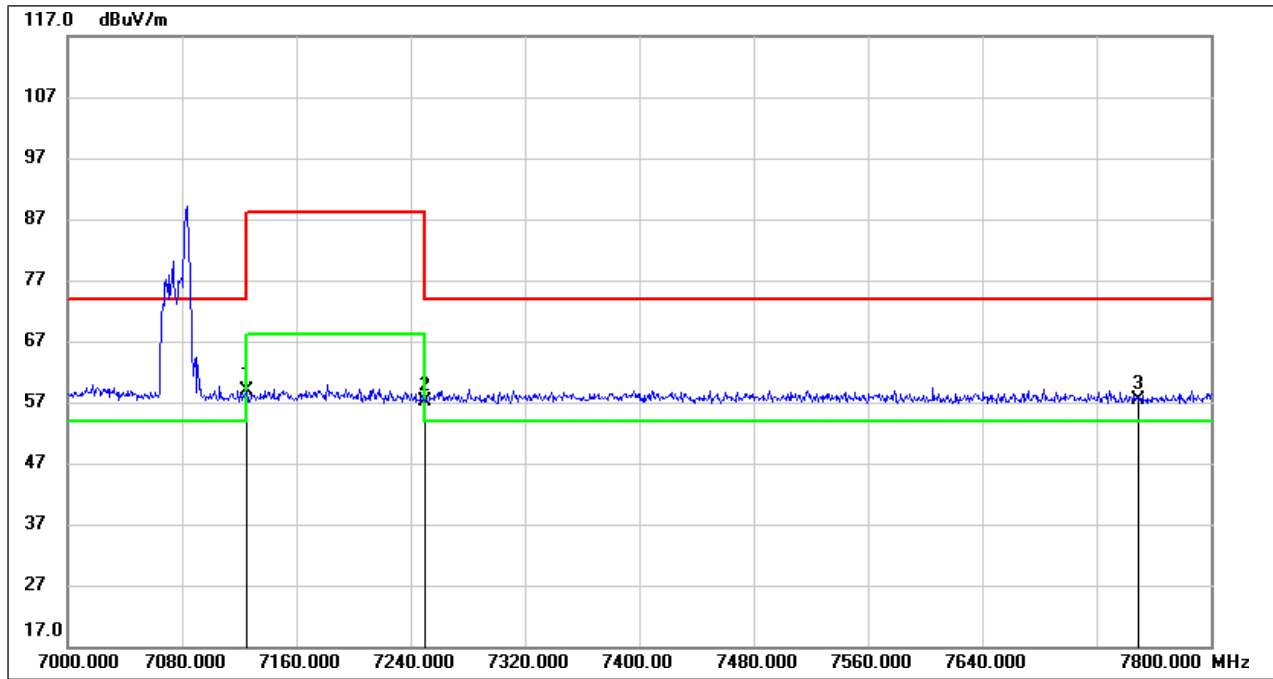


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	13.42	45.36	58.78	74.00	-15.22	peak
2	7250.000	11.96	45.27	57.23	74.00	-16.77	peak
3	7750.000	12.39	45.08	57.47	74.00	-16.53	peak

Test Mode:	802.11ax HE40 AV (26Tone Ru17)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

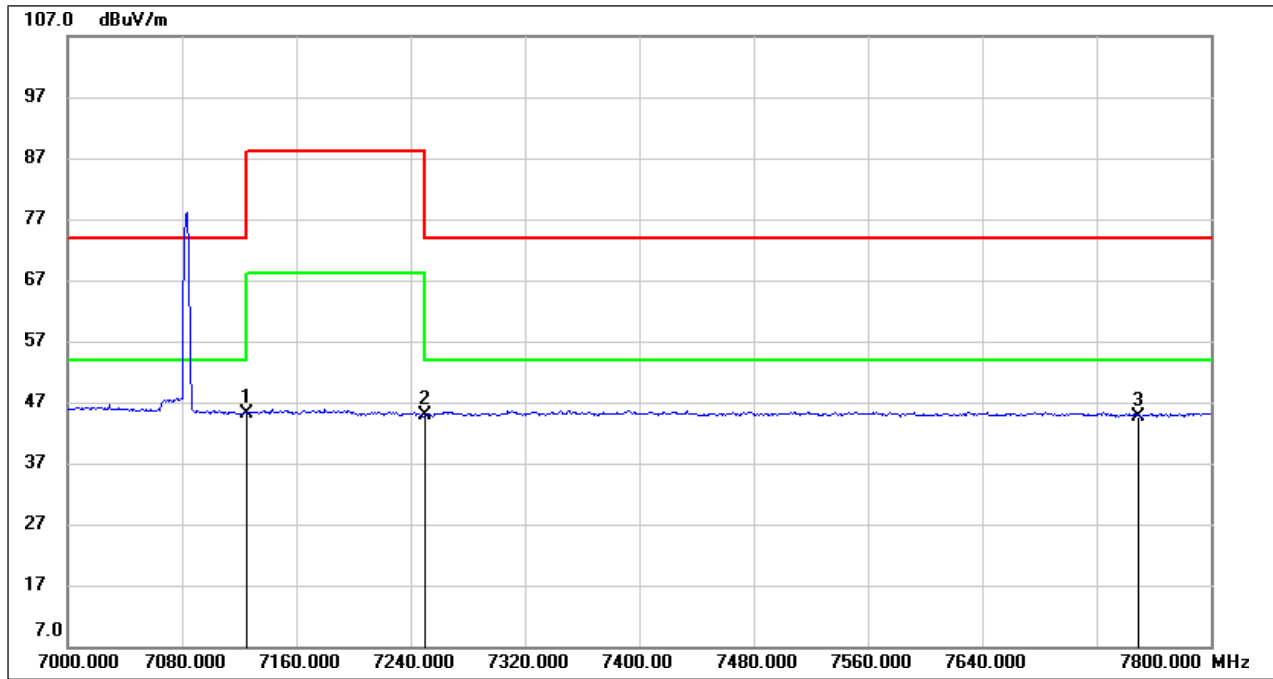


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.17	45.36	45.19	54.00	-8.81	AVG
2	7250.000	-0.42	45.27	44.85	54.00	-9.15	AVG
3	7750.000	-0.33	45.08	44.75	54.00	-9.25	AVG

Test Mode:	802.11ax HE40 PK (52Tone Ru44)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

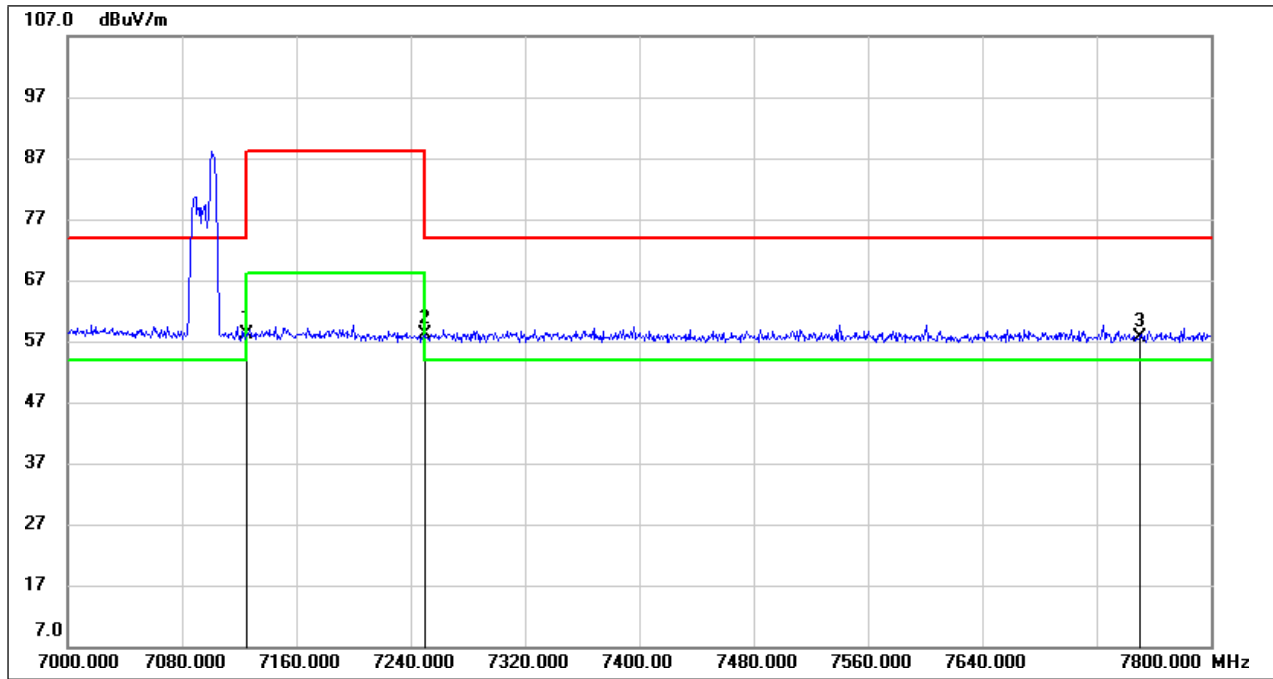


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.86	45.36	58.22	74.00	-15.78	peak
2	7250.000	12.79	45.27	58.06	74.00	-15.94	peak
3	7750.000	12.44	45.08	57.52	74.00	-16.48	peak

Test Mode:	802.11ax HE40 AV (52Tone Ru44)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

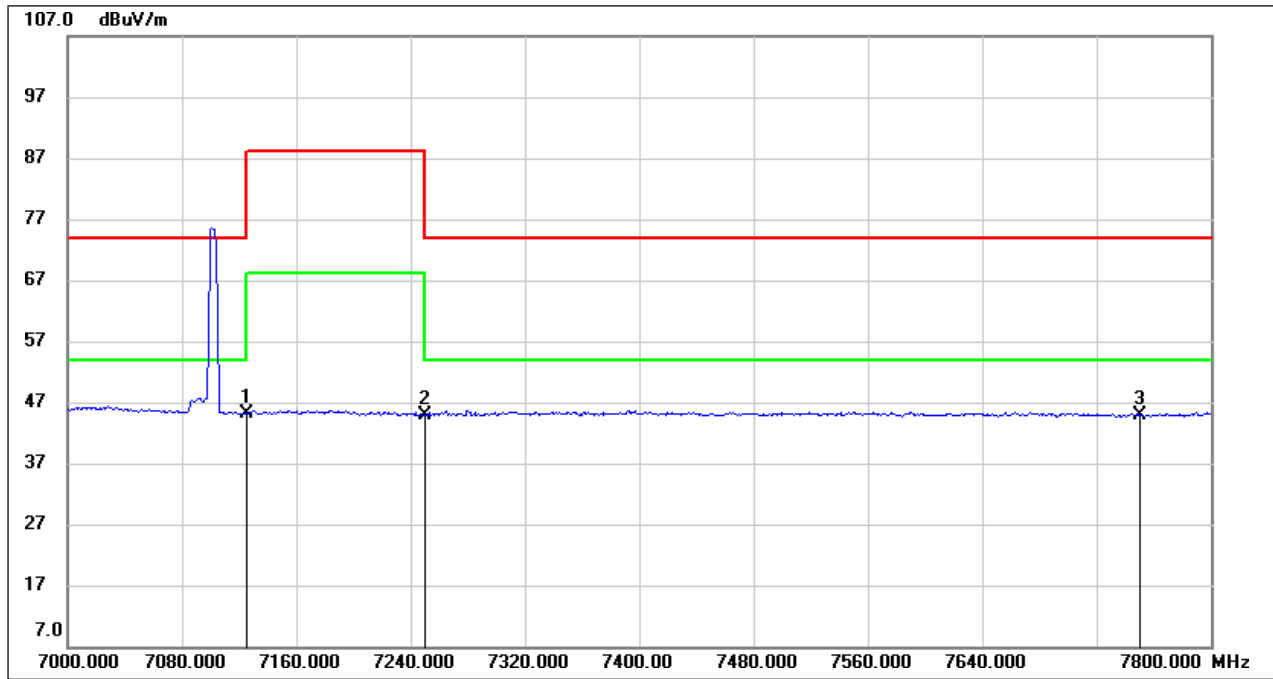


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.13	45.36	45.23	54.00	-8.77	AVG
2	7250.000	-0.45	45.27	44.82	54.00	-9.18	AVG
3	7750.000	-0.15	45.08	44.93	54.00	-9.07	AVG

Test Mode:	802.11ax HE40 PK (106Tone Ru56)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

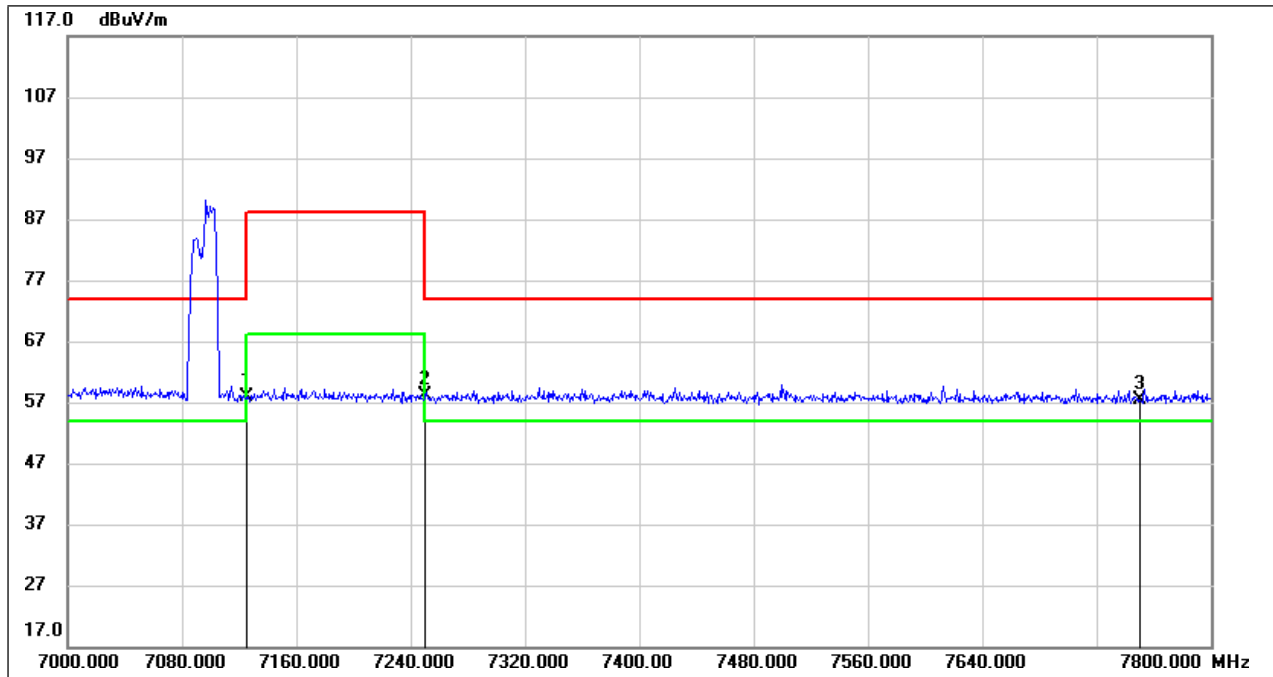


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.43	45.36	57.79	74.00	-16.21	peak
2	7250.000	12.80	45.27	58.07	74.00	-15.93	peak
3	7750.000	12.38	45.08	57.46	74.00	-16.54	peak

Test Mode:	802.11ax HE40 AV (106Tone Ru56)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

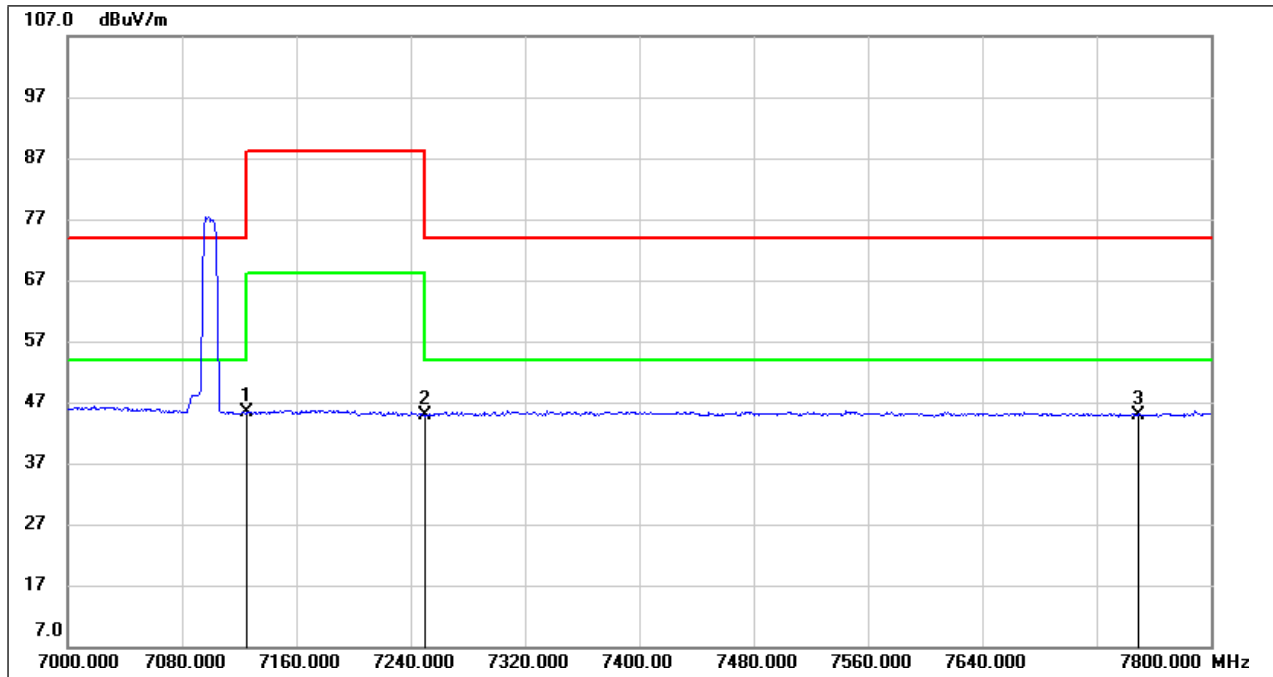


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.08	45.36	45.28	54.00	-8.72	AVG
2	7250.000	-0.41	45.27	44.86	54.00	-9.14	AVG
3	7750.000	-0.08	45.08	45.00	54.00	-9.00	AVG

Test Mode:	802.11ax HE40 PK (242Tone Ru62)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

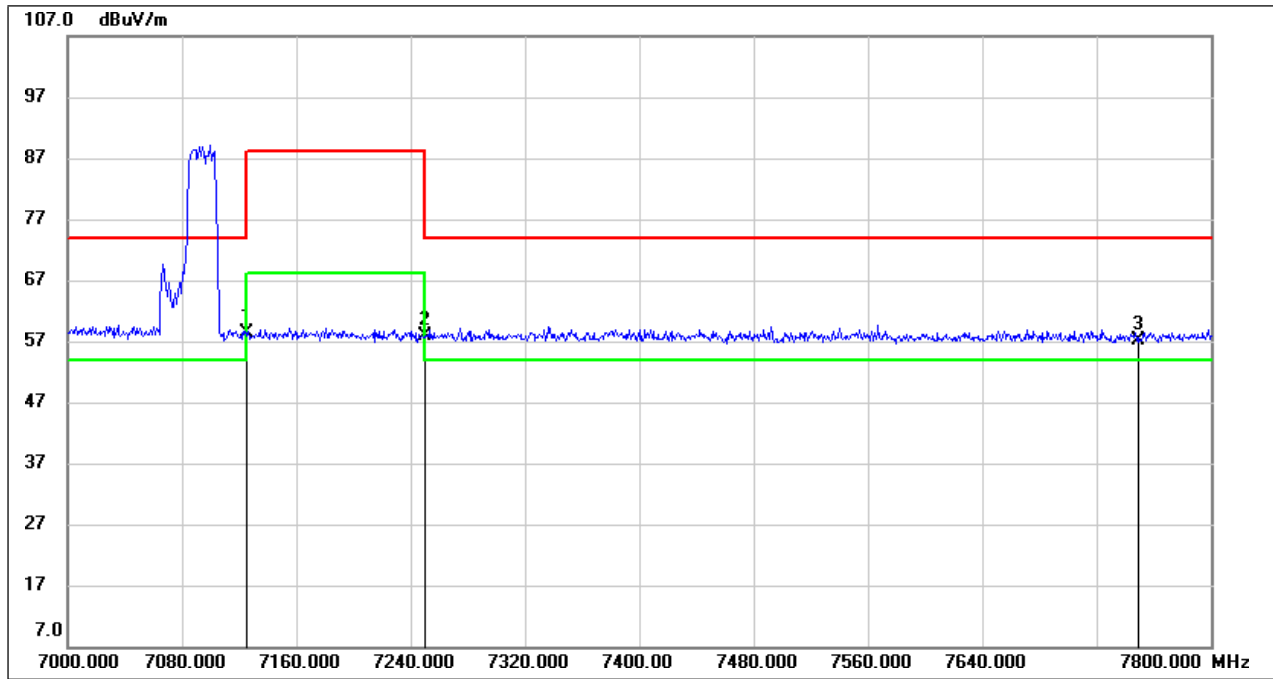


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.98	45.36	58.34	74.00	-15.66	peak
2	7250.000	12.54	45.27	57.81	74.00	-16.19	peak
3	7750.000	12.13	45.08	57.21	74.00	-16.79	peak

Test Mode:	802.11ax HE40 AV (242Tone Ru62)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

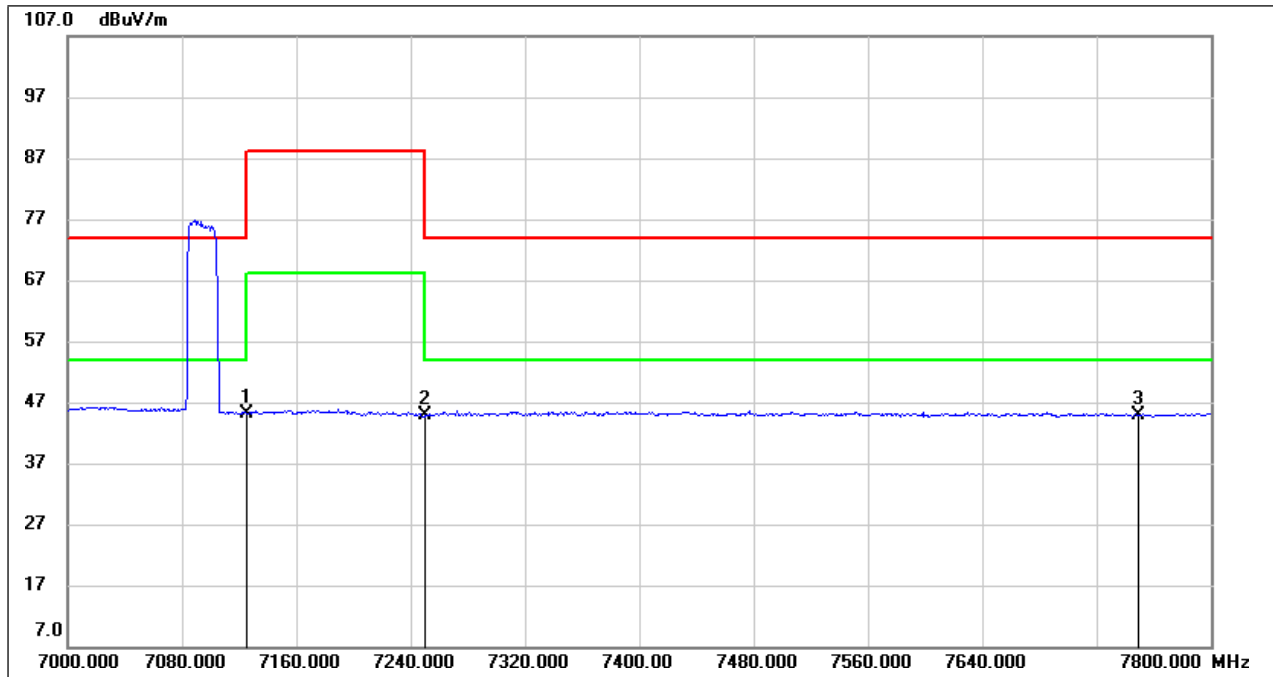


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.18	45.36	45.18	54.00	-8.82	AVG
2	7250.000	-0.28	45.27	44.99	54.00	-9.01	AVG
3	7750.000	-0.26	45.08	44.82	54.00	-9.18	AVG

Test Mode:	802.11ax HE40 PK (484Tone Ru65)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

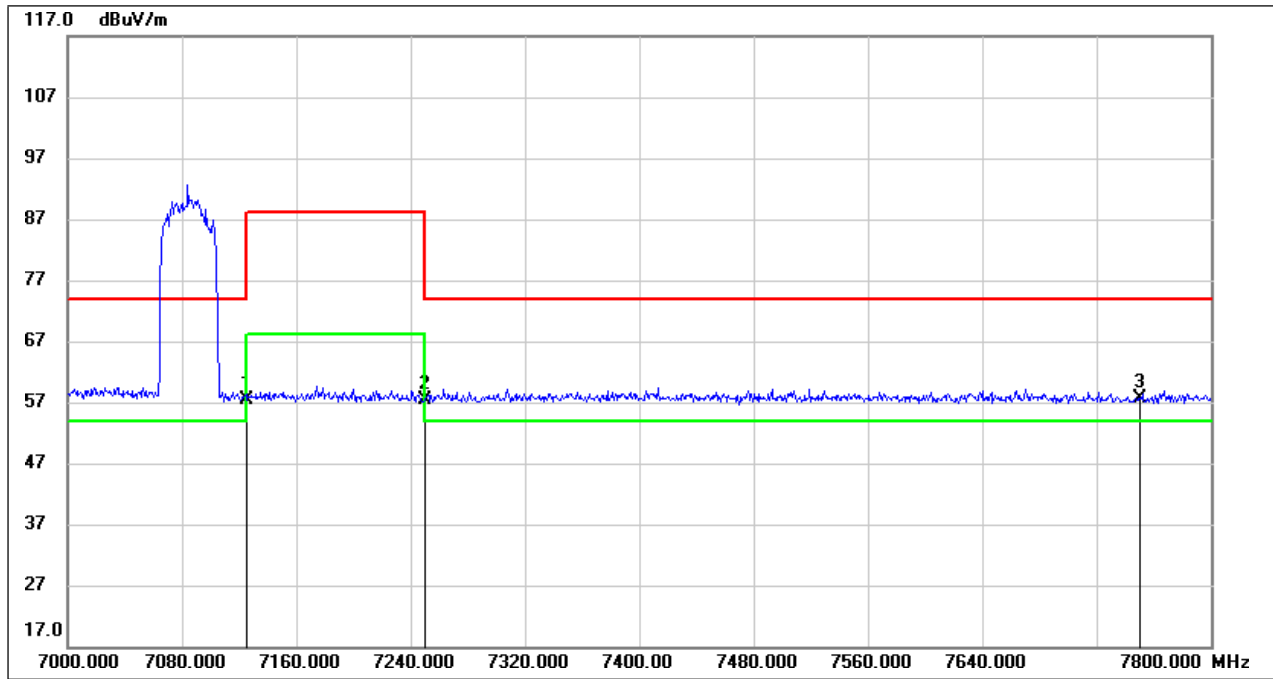


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.01	45.36	57.37	74.00	-16.63	peak
2	7250.000	12.02	45.27	57.29	74.00	-16.71	peak
3	7750.000	12.55	45.08	57.63	74.00	-16.37	peak

Test Mode:	802.11ax HE40 AV (484Tone Ru65)	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

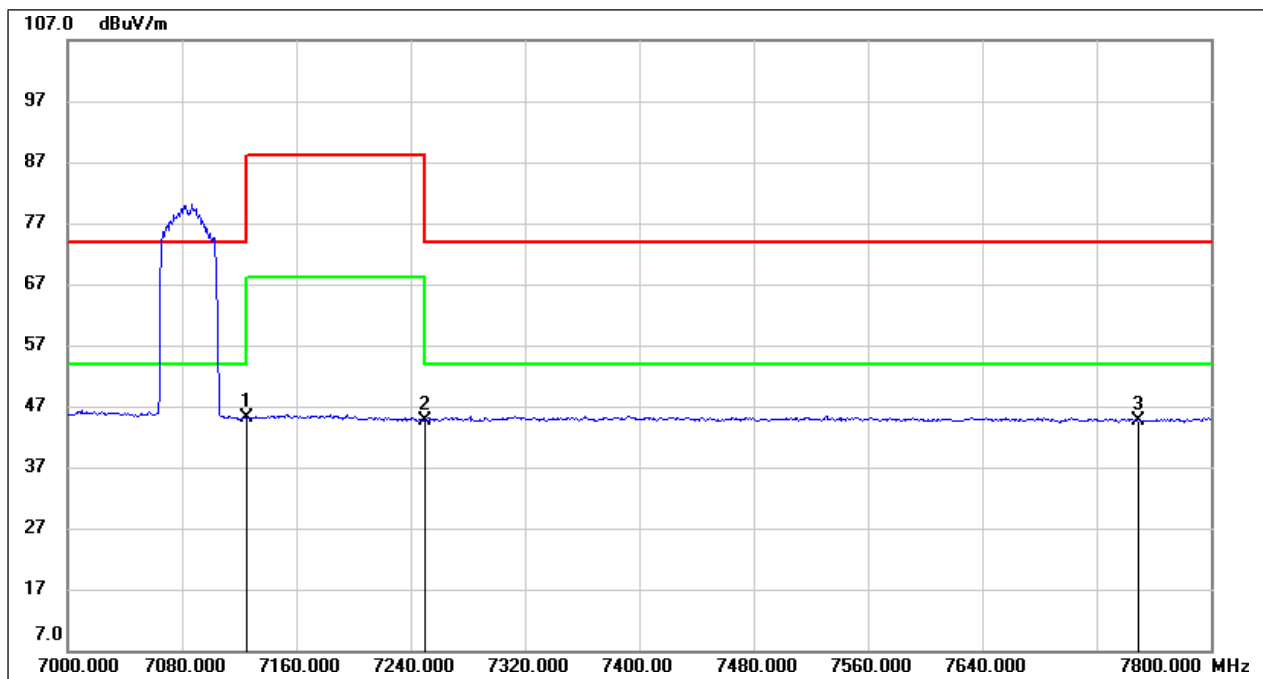


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.25	45.36	45.11	54.00	-8.89	AVG
2	7250.000	-0.61	45.27	44.66	54.00	-9.34	AVG
3	7750.000	-0.43	45.08	44.65	54.00	-9.35	AVG

Test Mode:	802.11ax HE80 PK (26Tone Ru0)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

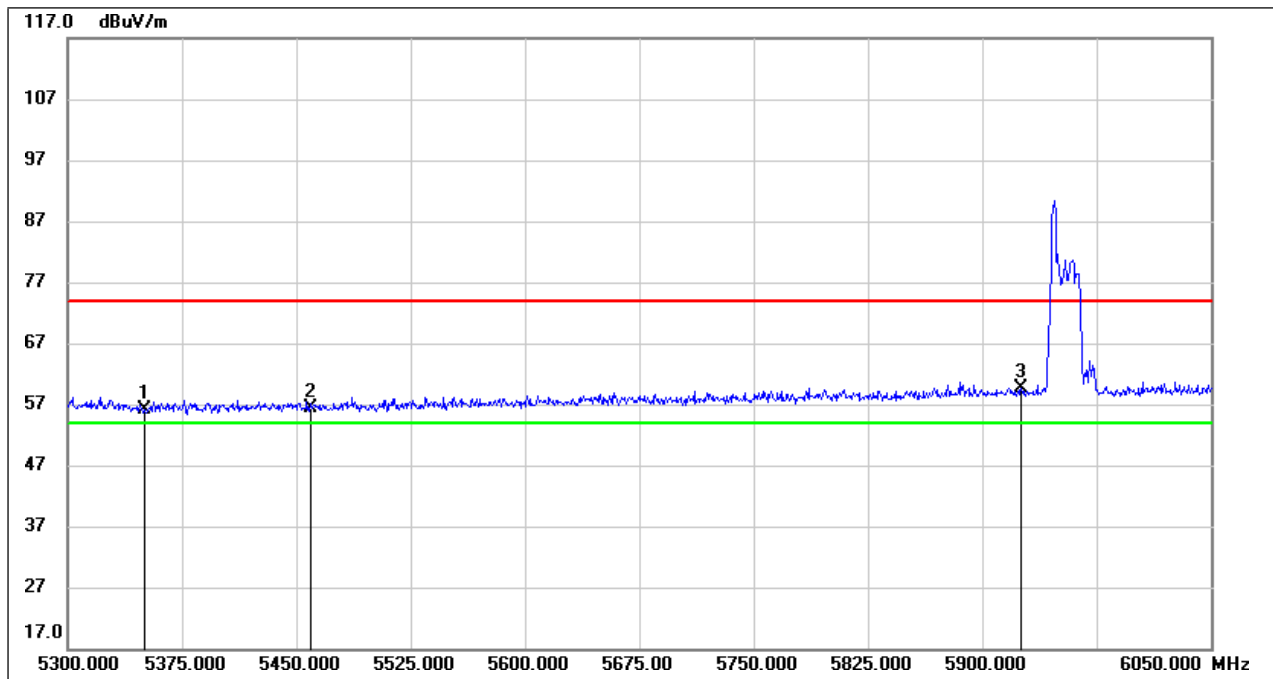


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.62	40.49	56.11	74.00	-17.89	peak
2	5460.000	15.68	40.62	56.30	74.00	-17.70	peak
3	5925.000	17.74	41.80	59.54	74.00	-14.46	peak

Test Mode:	802.11ax HE80 AV (26Tone Ru0)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

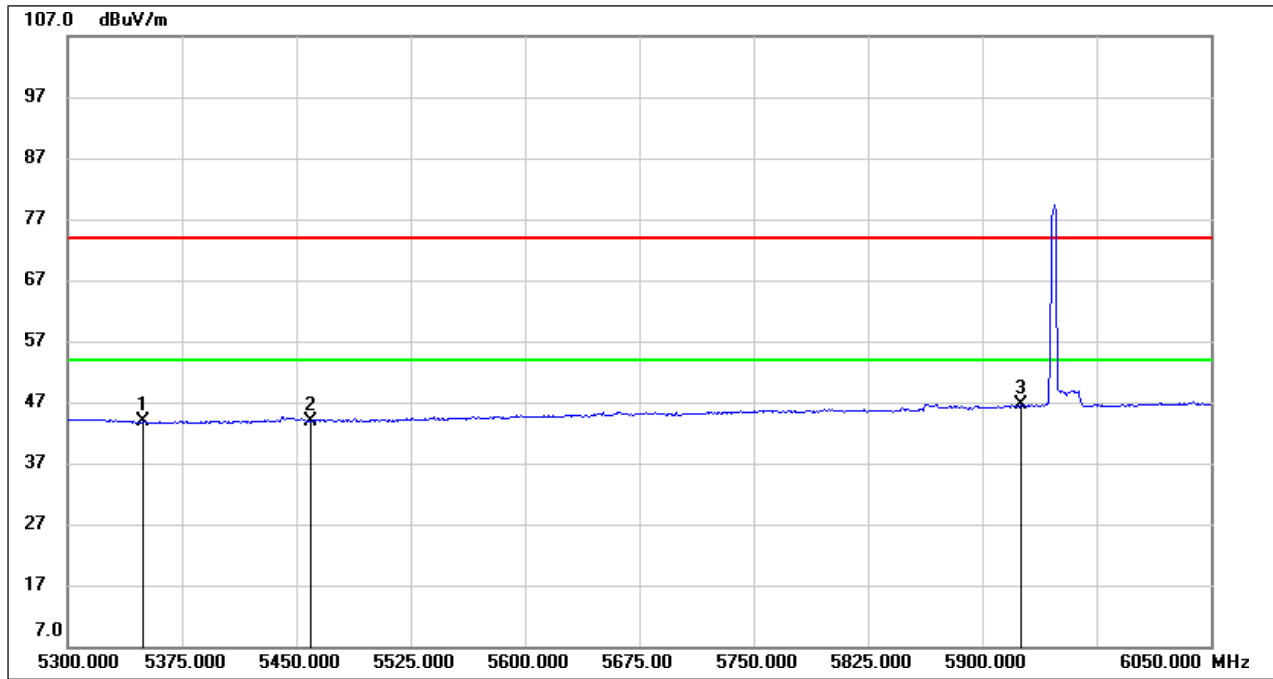


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.34	40.49	43.83	54.00	-10.17	AVG
2	5460.000	3.33	40.62	43.95	54.00	-10.05	AVG
3	5925.000	4.80	41.80	46.60	54.00	-7.40	AVG

Test Mode:	802.11ax HE80 PK (52Tone Ru37)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

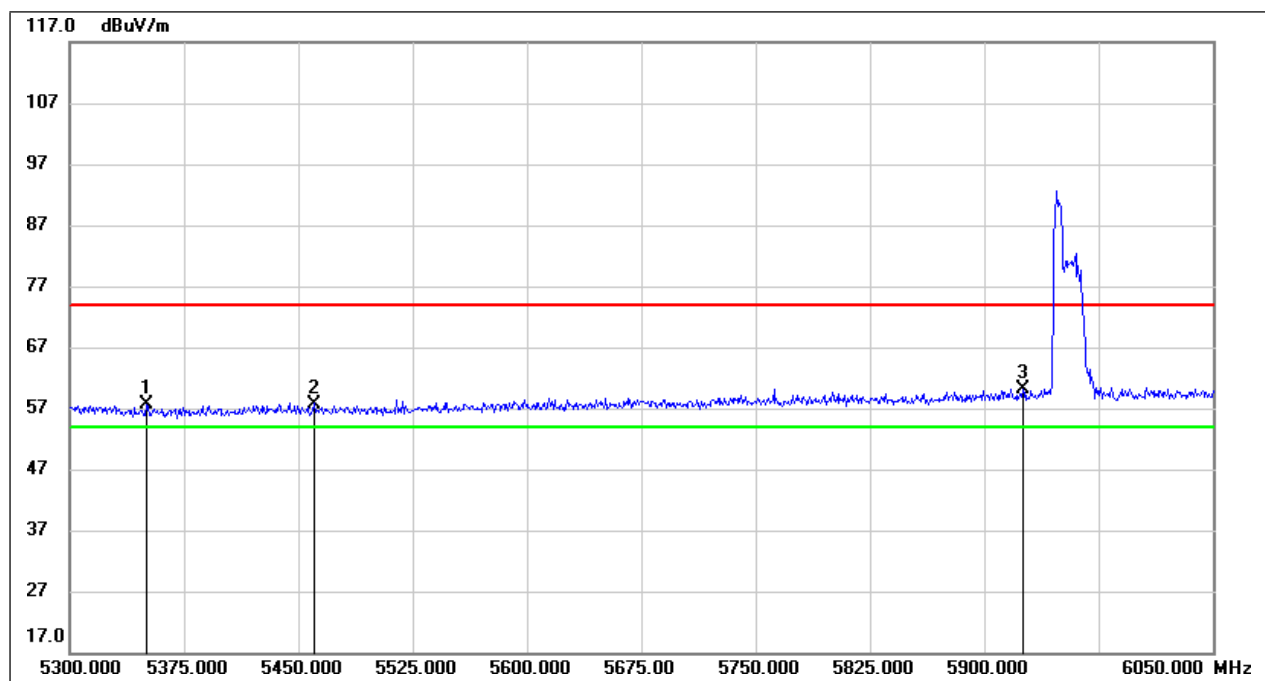


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	17.07	40.49	57.56	74.00	-16.44	peak
2	5460.000	17.13	40.62	57.75	74.00	-16.25	peak
3	5925.000	18.22	41.80	60.02	74.00	-13.98	peak

Test Mode:	802.11ax HE80 AV (52Tone Ru37)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

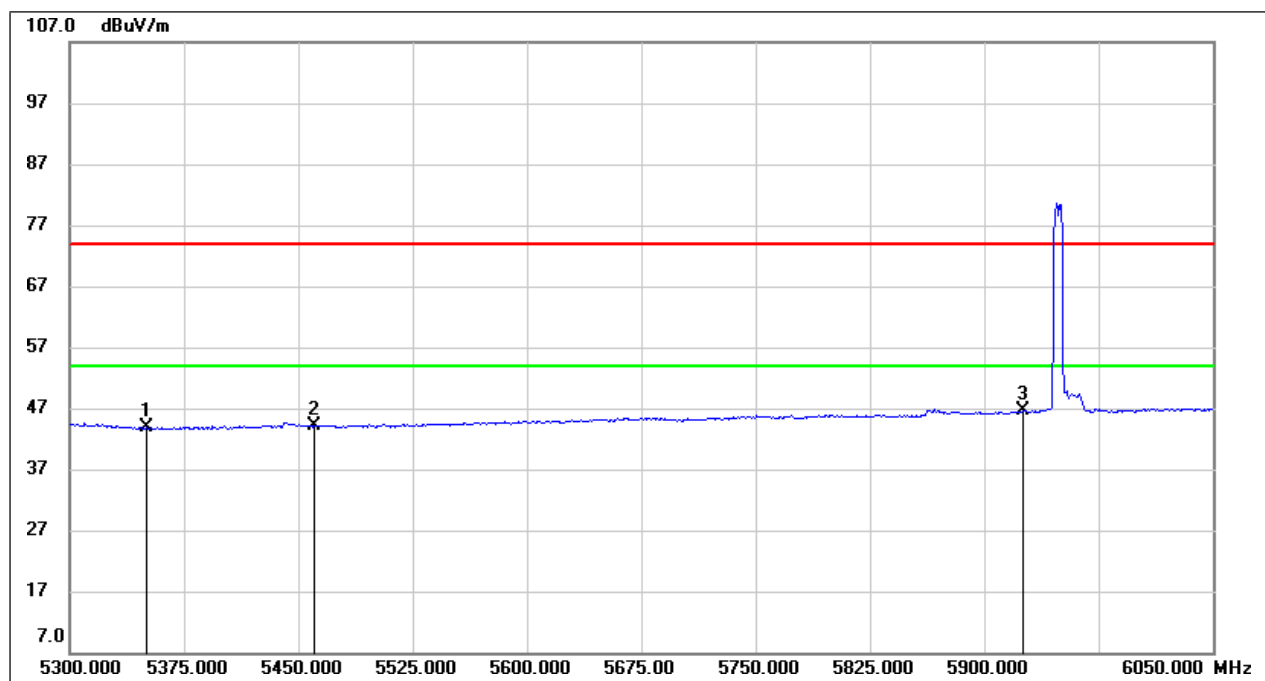


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.30	40.49	43.79	54.00	-10.21	AVG
2	5460.000	3.49	40.62	44.11	54.00	-9.89	AVG
3	5925.000	4.84	41.80	46.64	54.00	-7.36	AVG

Test Mode:	802.11ax HE80 PK (106Tone Ru53)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

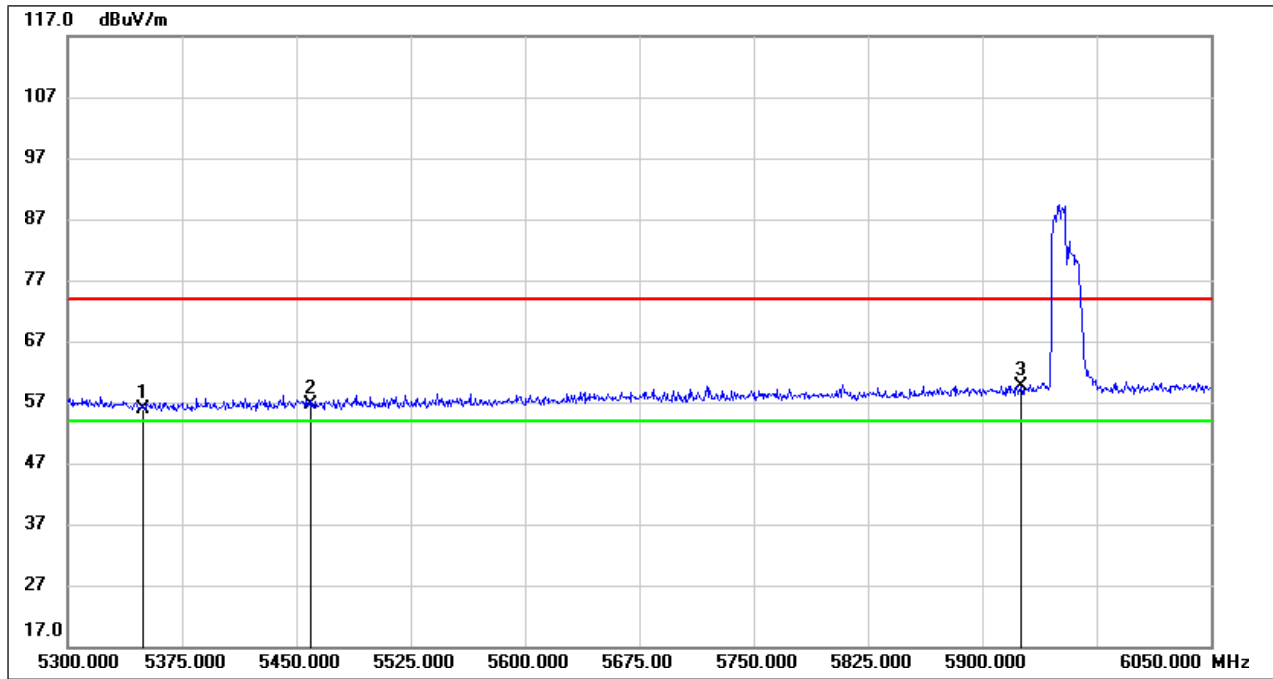


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.48	40.49	55.97	74.00	-18.03	peak
2	5460.000	15.90	40.62	56.52	74.00	-17.48	peak
3	5925.000	17.92	41.80	59.72	74.00	-14.28	peak

Test Mode:	802.11ax HE80 AV (106Tone Ru53)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

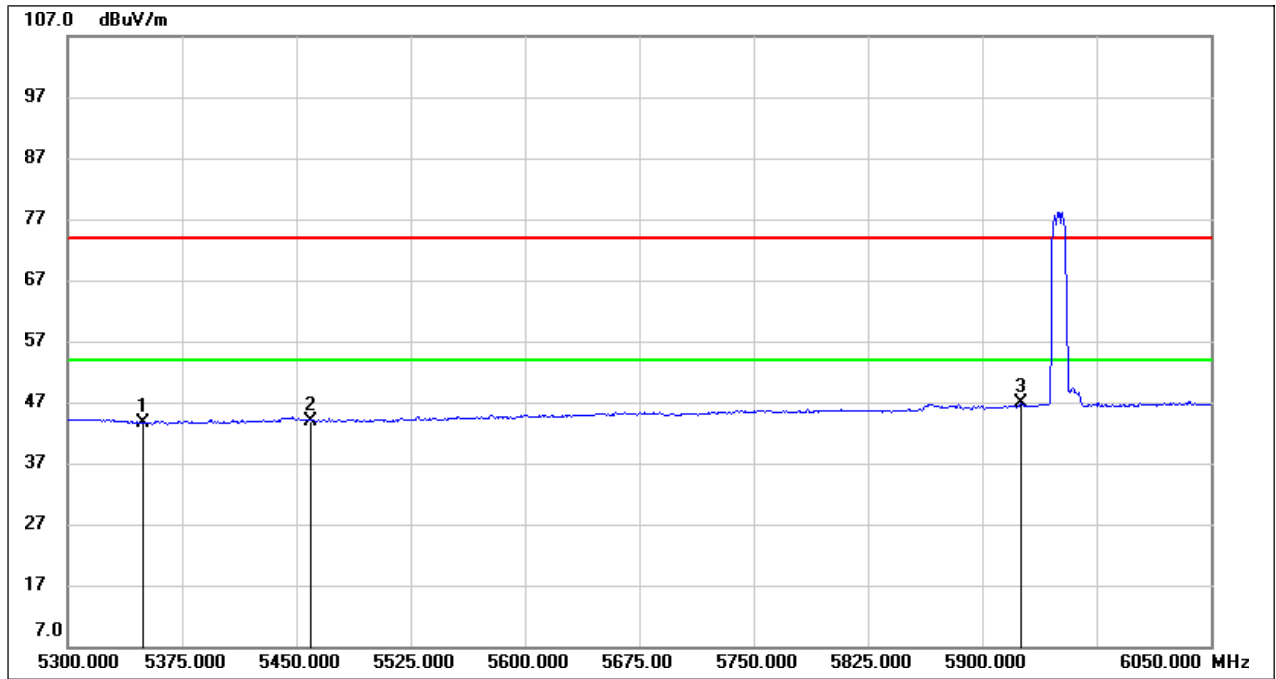


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.05	40.49	43.54	54.00	-10.46	AVG
2	5460.000	3.38	40.62	44.00	54.00	-10.00	AVG
3	5925.000	5.03	41.80	46.83	54.00	-7.17	AVG

Test Mode:	802.11ax HE80 PK (242Tone Ru61)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

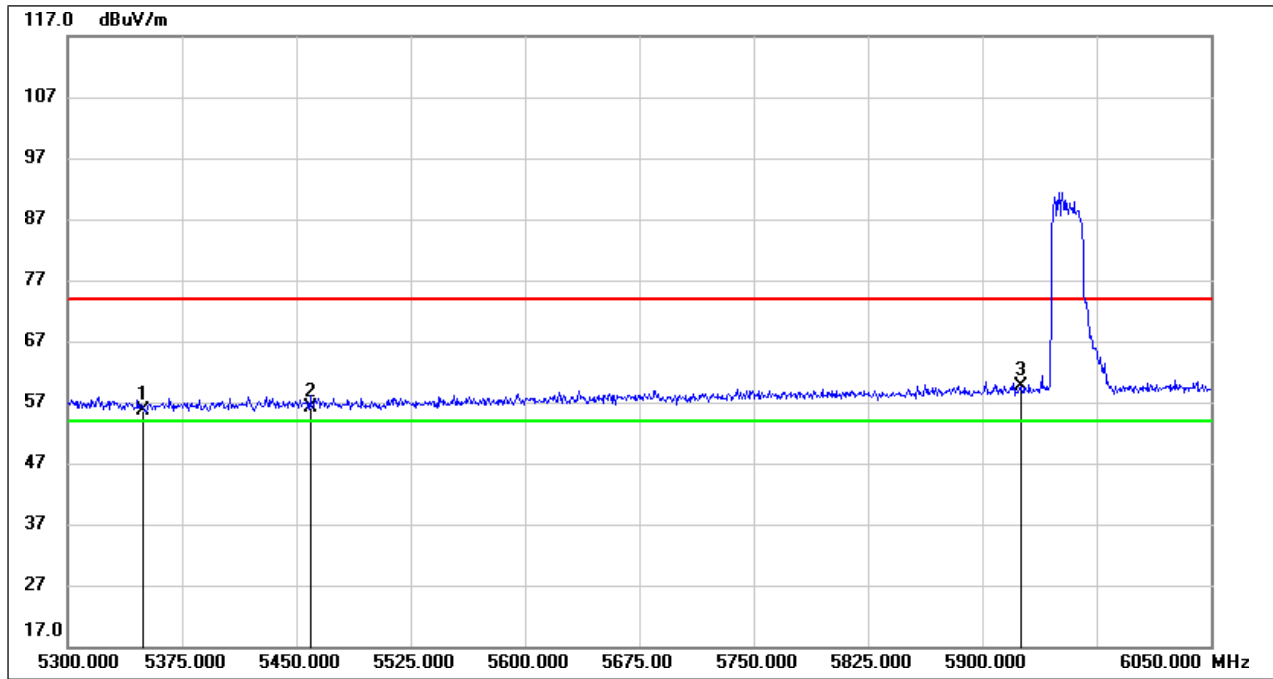


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.16	40.49	55.65	74.00	-18.35	peak
2	5460.000	15.62	40.62	56.24	74.00	-17.76	peak
3	5925.000	17.92	41.80	59.72	74.00	-14.28	peak

Test Mode:	802.11ax HE80 AV (242Tone Ru61)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

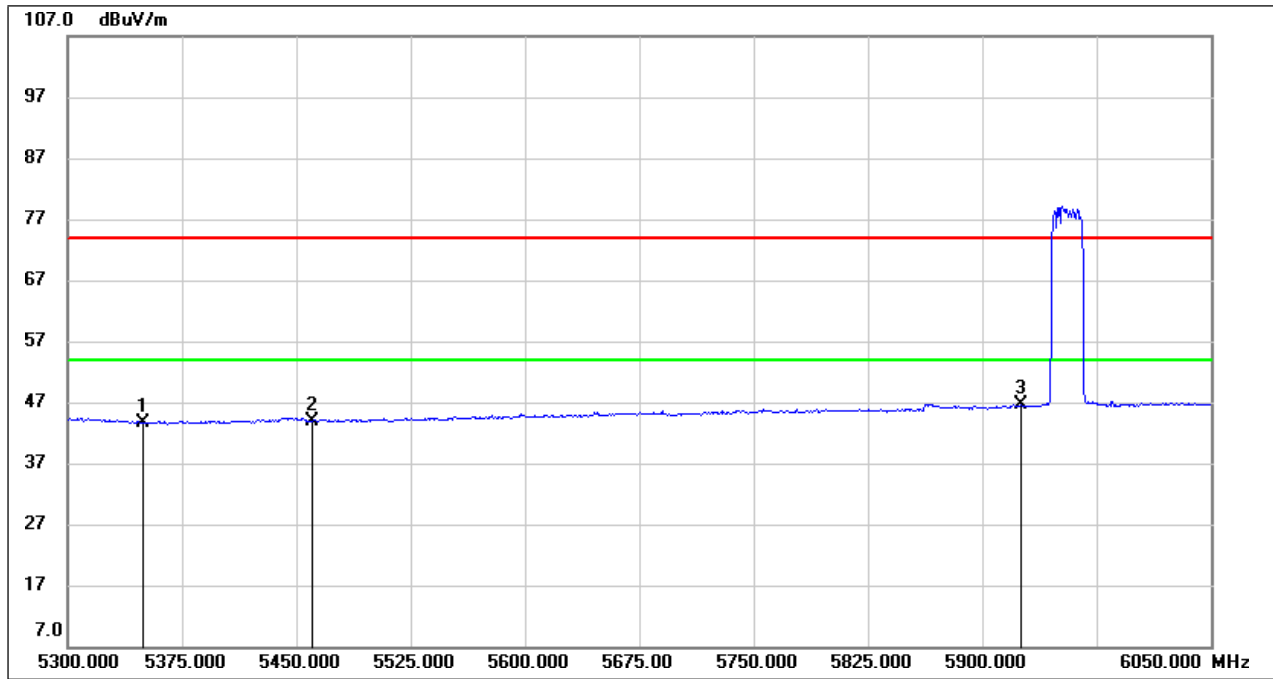


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.07	40.49	43.56	54.00	-10.44	AVG
2	5460.000	3.33	40.62	43.95	54.00	-10.05	AVG
3	5925.000	4.74	41.80	46.54	54.00	-7.46	AVG

Test Mode:	802.11ax HE80 PK (484Tone Ru65)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

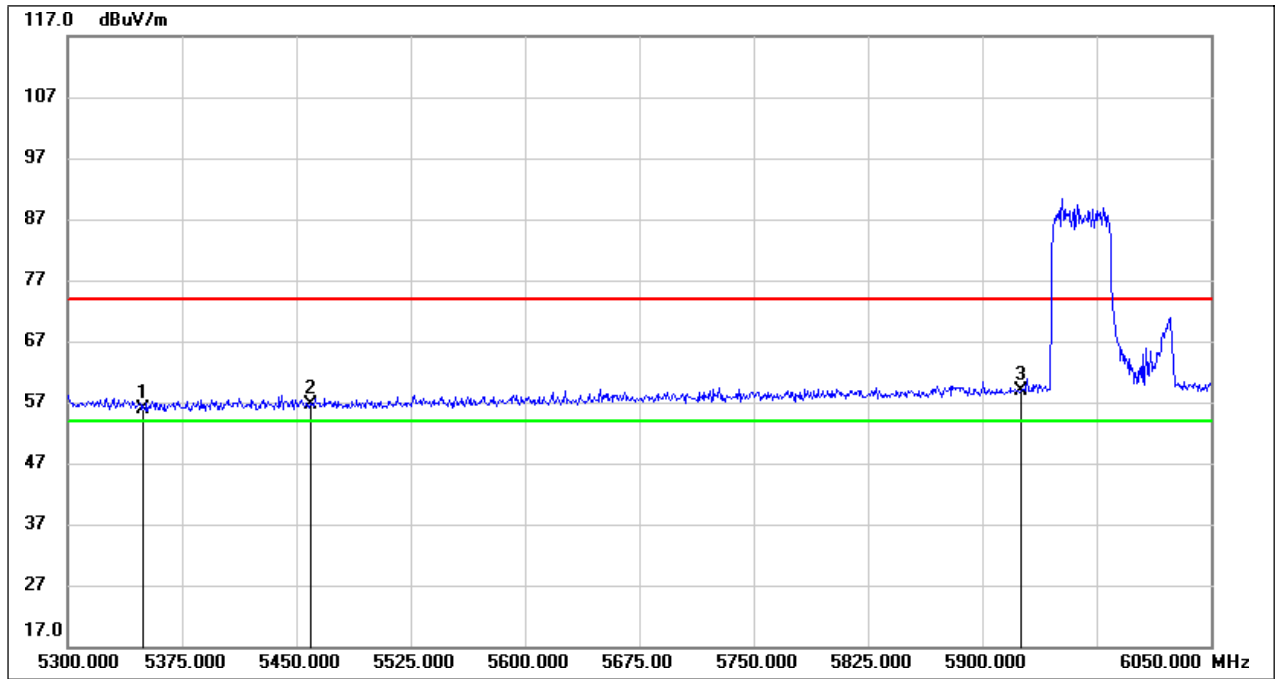


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.27	40.49	55.76	74.00	-18.24	peak
2	5460.000	16.08	40.62	56.70	74.00	-17.30	peak
3	5925.000	16.99	41.80	58.79	74.00	-15.21	peak

Test Mode:	802.11ax HE80 AV (484Tone Ru65)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

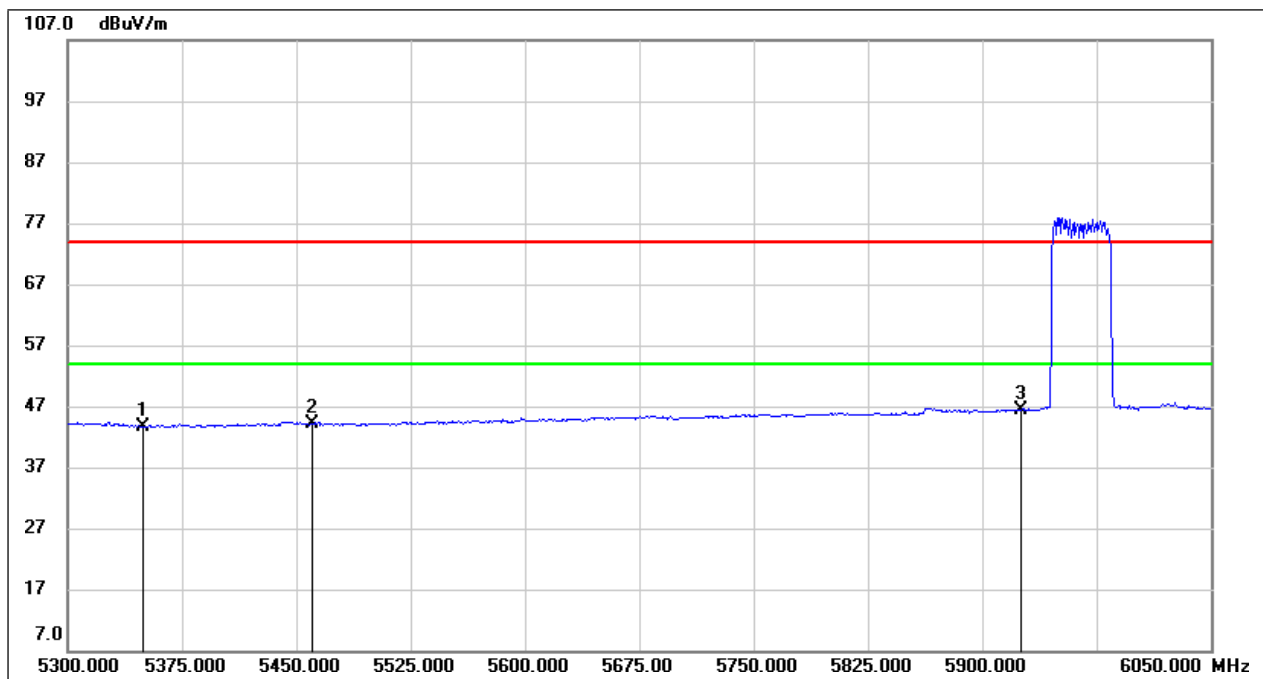


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.18	40.49	43.67	54.00	-10.33	AVG
2	5460.000	3.45	40.62	44.07	54.00	-9.93	AVG
3	5925.000	4.69	41.80	46.49	54.00	-7.51	AVG

Test Mode:	802.11ax HE80 PK (996Tone Ru67)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

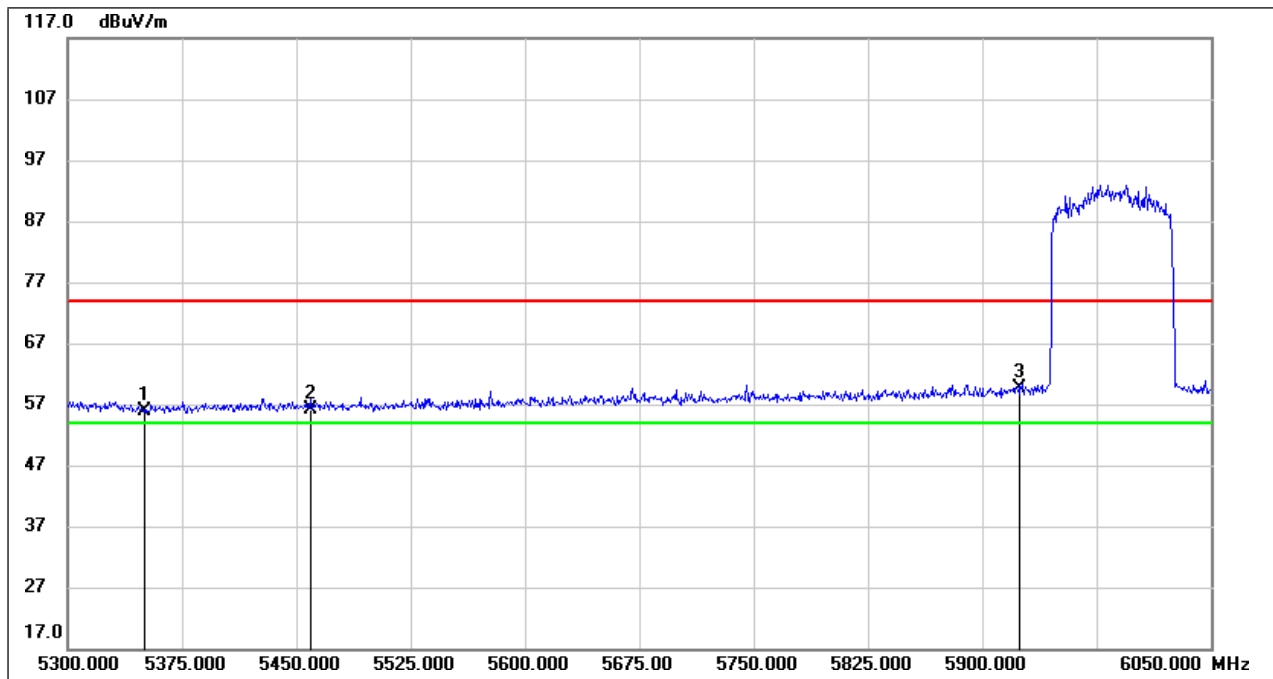


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.51	40.49	56.00	74.00	-18.00	peak
2	5460.000	15.58	40.62	56.20	74.00	-17.80	peak
3	5925.000	17.84	41.80	59.64	74.00	-14.36	peak

Test Mode:	802.11ax HE80 AV (996Tone Ru67)	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

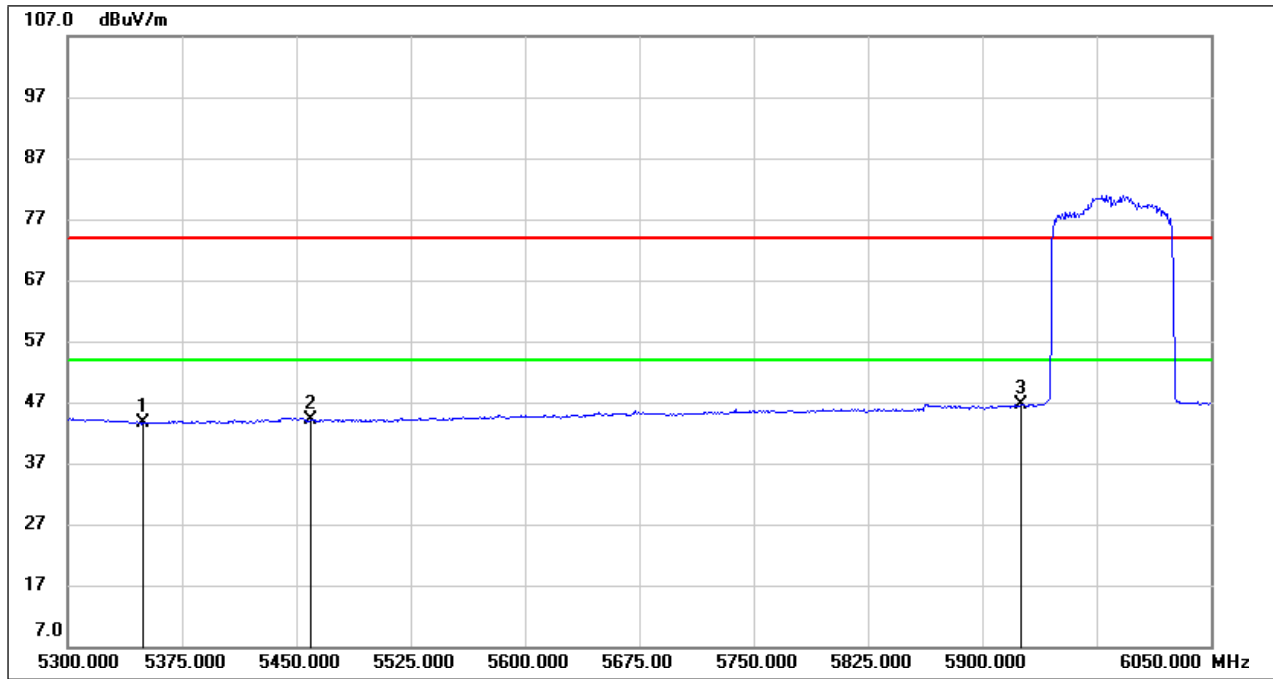


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	3.03	40.49	43.52	54.00	-10.48	AVG
2	5460.000	3.40	40.62	44.02	54.00	-9.98	AVG
3	5925.000	4.83	41.80	46.63	54.00	-7.37	AVG

Test Mode:	802.11ax HE80 PK (26Tone Ru36)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

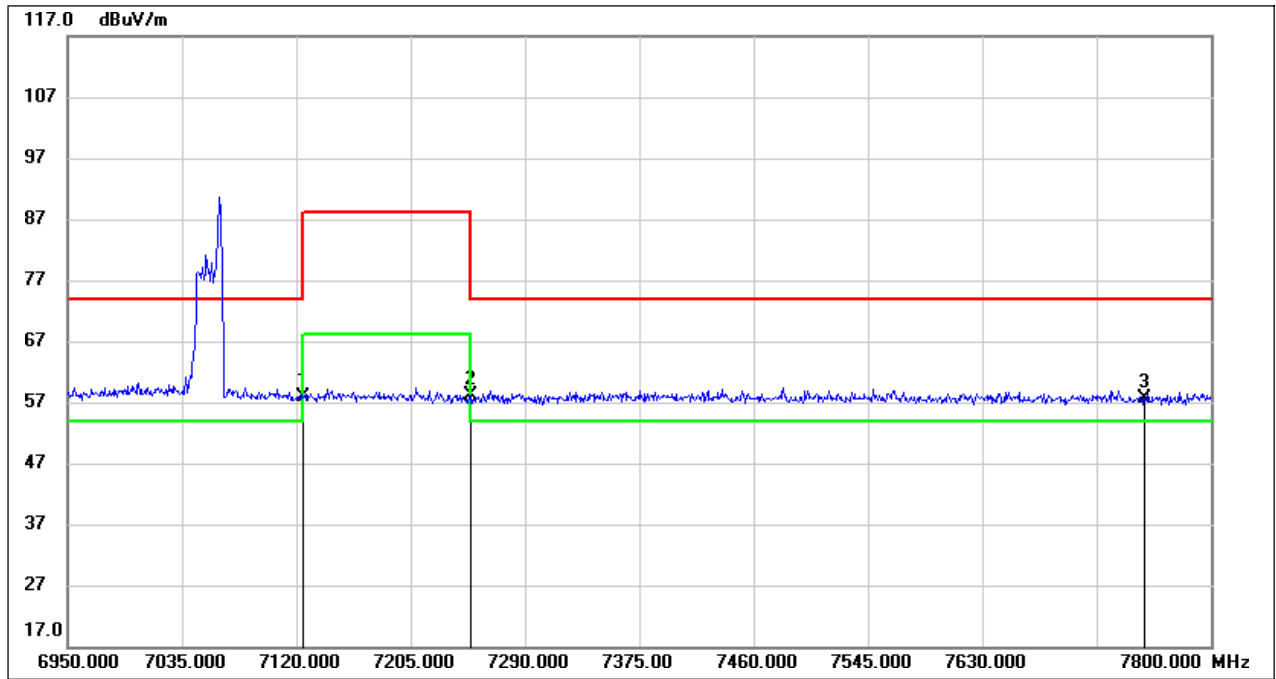


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.50	45.36	57.86	74.00	-16.14	peak
2	7250.000	12.88	45.27	58.15	74.00	-15.85	peak
3	7750.000	12.50	45.08	57.58	74.00	-16.42	peak

Test Mode:	802.11ax HE80 AV (26Tone Ru36)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

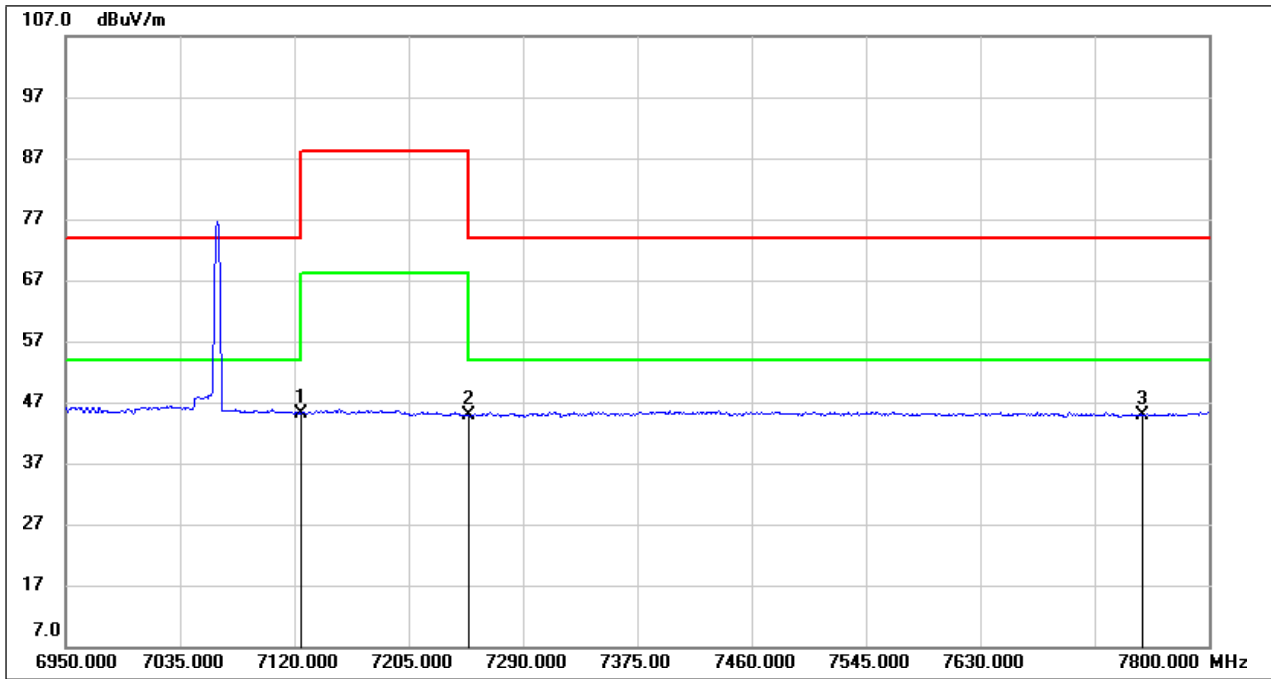


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.11	45.36	45.25	54.00	-8.75	AVG
2	7250.000	-0.45	45.27	44.82	54.00	-9.18	AVG
3	7750.000	-0.20	45.08	44.88	54.00	-9.12	AVG

Test Mode:	802.11ax HE80 PK (52Tone Ru52)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

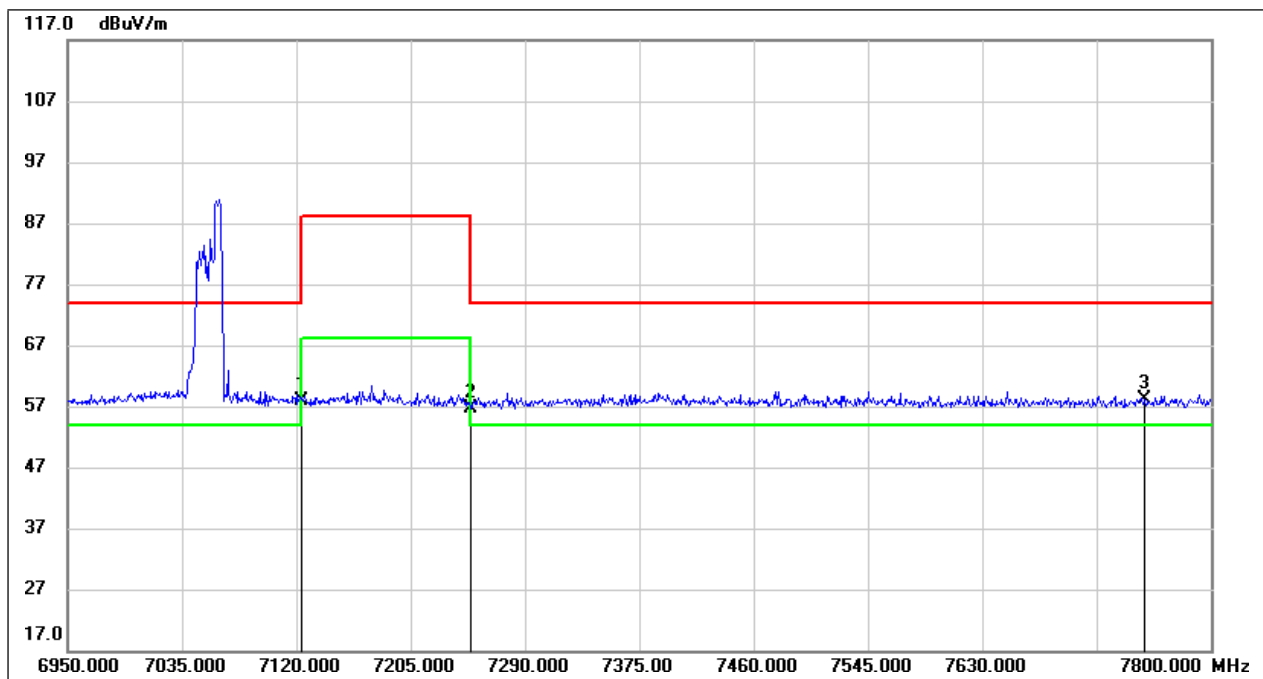


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.49	45.36	57.85	74.00	-16.15	peak
2	7250.000	11.44	45.27	56.71	74.00	-17.29	peak
3	7750.000	13.02	45.08	58.10	74.00	-15.90	peak

Test Mode:	802.11ax HE80 AV (52Tone Ru52)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

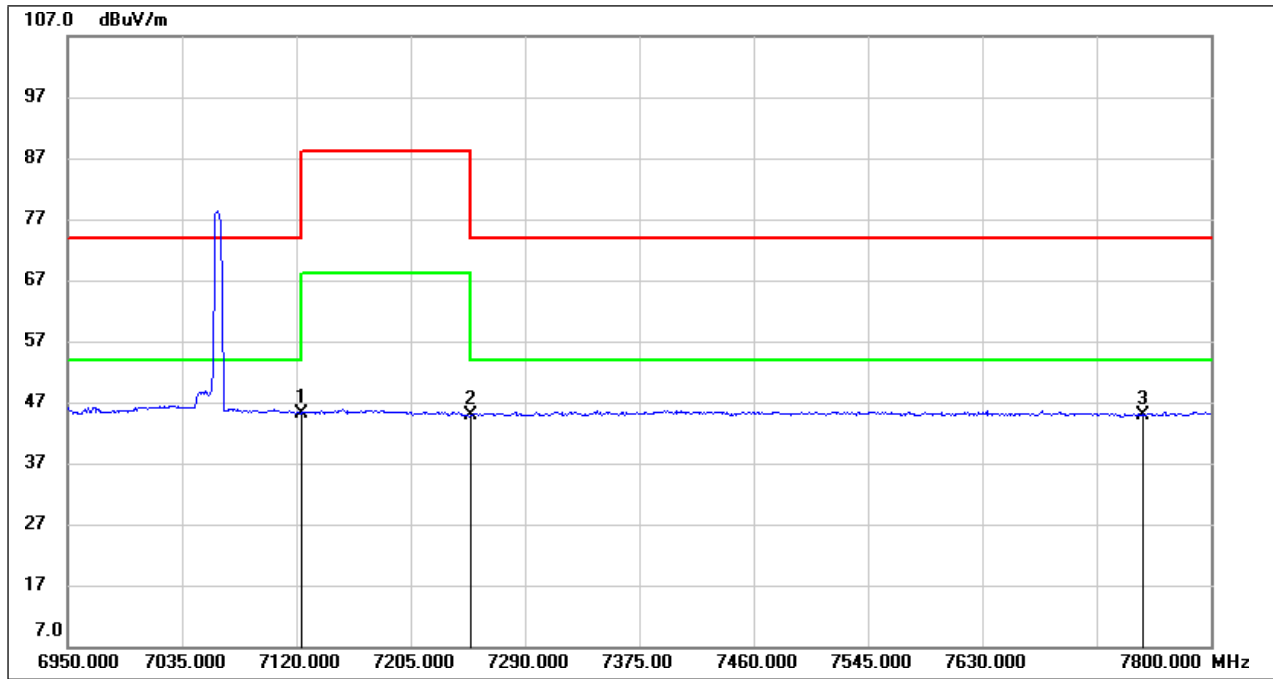


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.11	45.36	45.25	54.00	-8.75	AVG
2	7250.000	-0.46	45.27	44.81	54.00	-9.19	AVG
3	7750.000	-0.21	45.08	44.87	54.00	-9.13	AVG

Test Mode:	802.11ax HE80 PK (106Tone Ru60)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

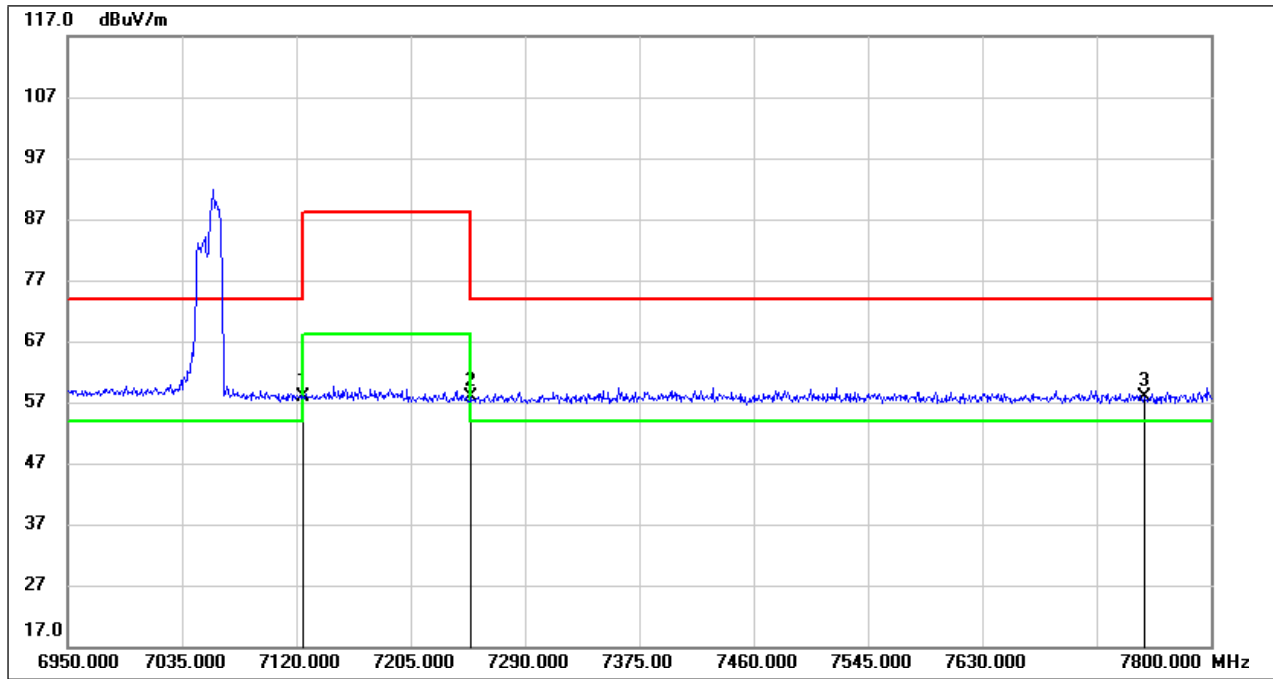


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.64	45.36	58.00	74.00	-16.00	peak
2	7250.000	12.72	45.27	57.99	74.00	-16.01	peak
3	7750.000	12.81	45.08	57.89	74.00	-16.11	peak

Test Mode:	802.11ax HE80 AV (106Tone Ru60)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

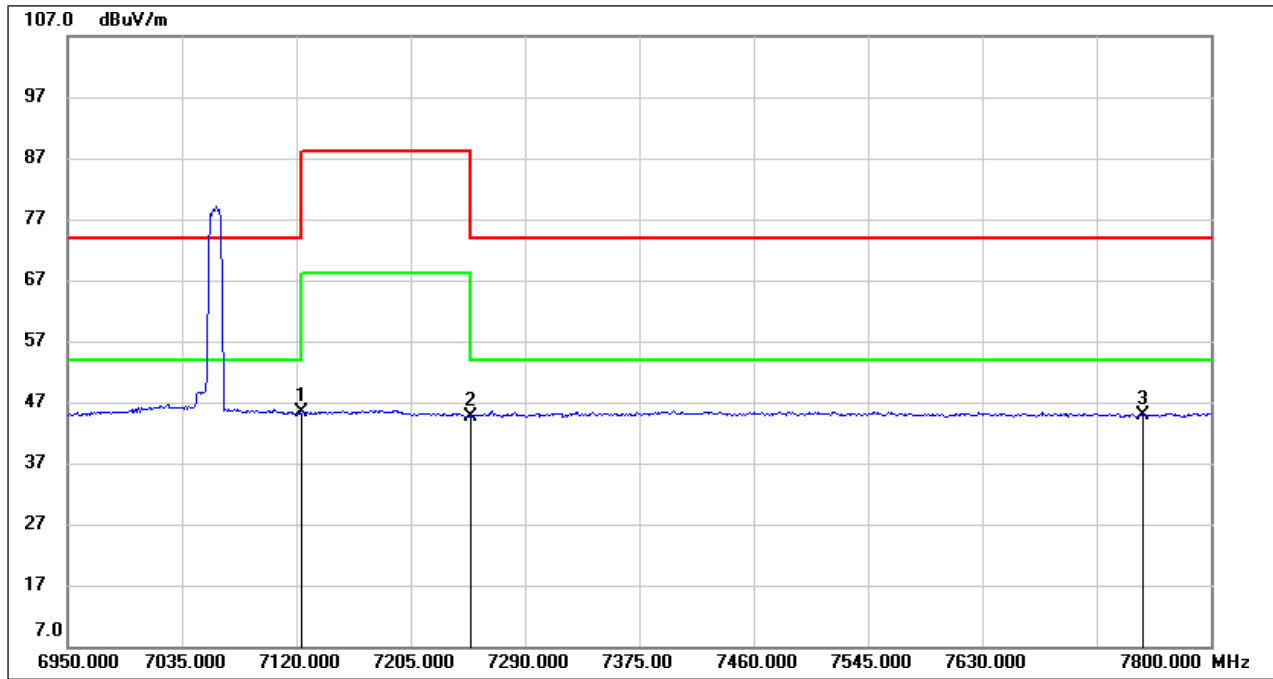


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.09	45.36	45.27	54.00	-8.73	AVG
2	7250.000	-0.58	45.27	44.69	54.00	-9.31	AVG
3	7750.000	-0.21	45.08	44.87	54.00	-9.13	AVG

Test Mode:	802.11ax HE80 PK (242Tone Ru64)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

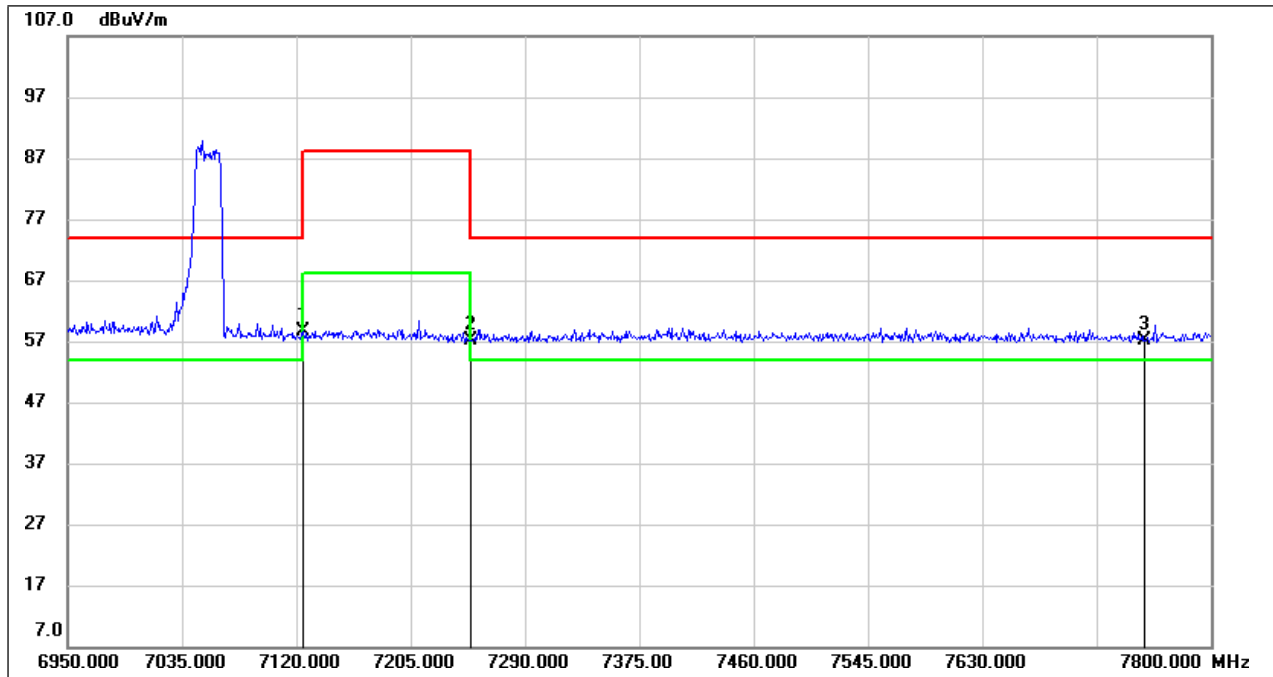


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	13.15	45.36	58.51	74.00	-15.49	peak
2	7250.000	11.79	45.27	57.06	74.00	-16.94	peak
3	7750.000	12.12	45.08	57.20	74.00	-16.80	peak

Test Mode:	802.11ax HE80 AV (242Tone Ru64)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

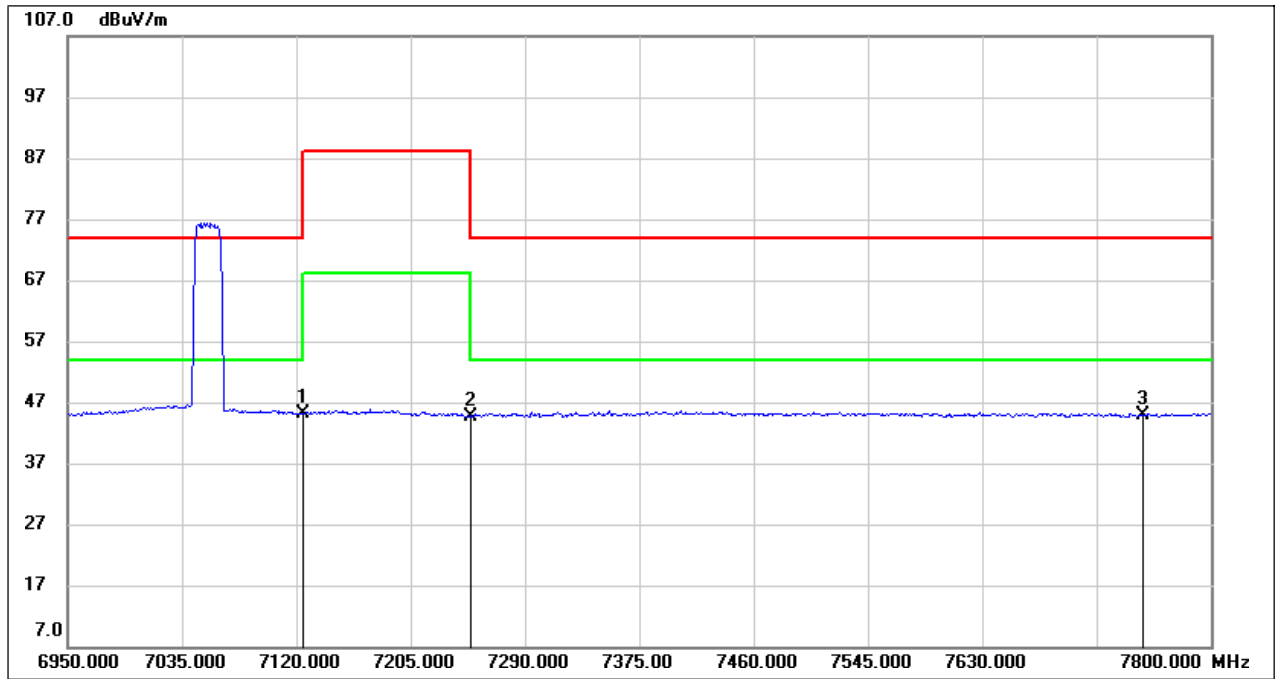


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.14	45.36	45.22	54.00	-8.78	AVG
2	7250.000	-0.65	45.27	44.62	54.00	-9.38	AVG
3	7750.000	-0.25	45.08	44.83	54.00	-9.17	AVG

Test Mode:	802.11ax HE80 PK (484Tone Ru66)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

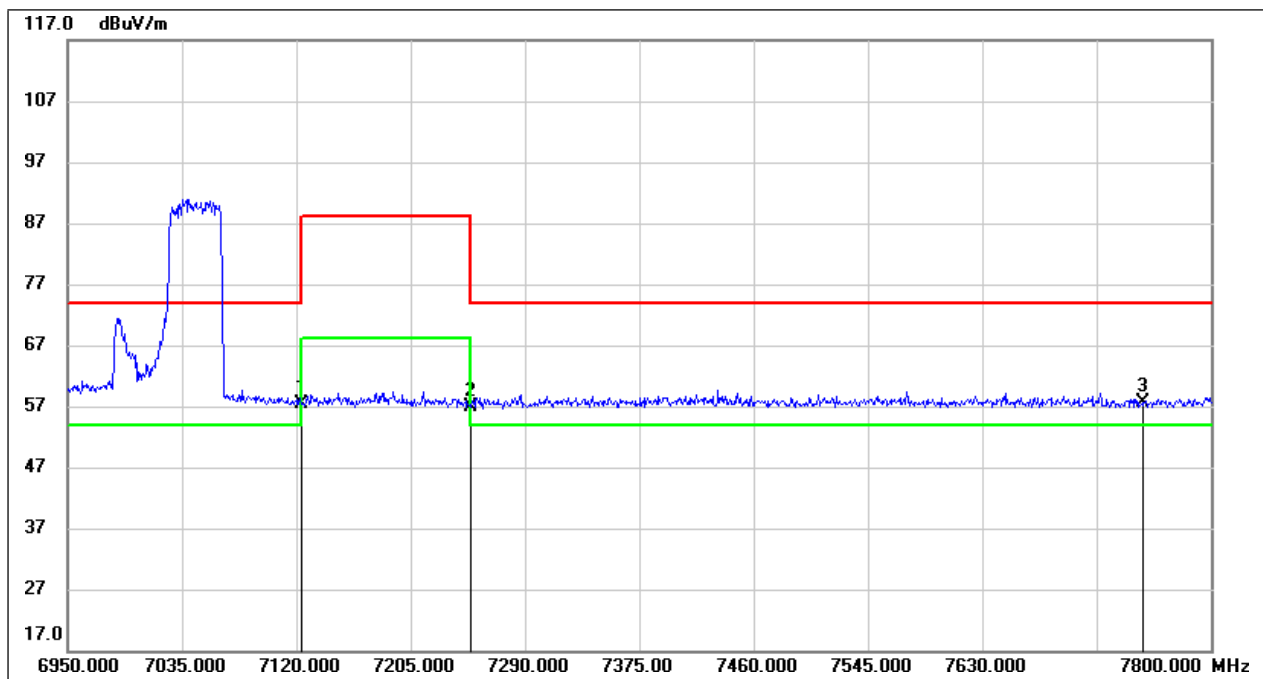


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.08	45.36	57.44	74.00	-16.56	peak
2	7250.000	11.54	45.27	56.81	74.00	-17.19	peak
3	7750.000	12.54	45.08	57.62	74.00	-16.38	peak

Test Mode:	802.11ax HE80 AV (484Tone Ru66)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

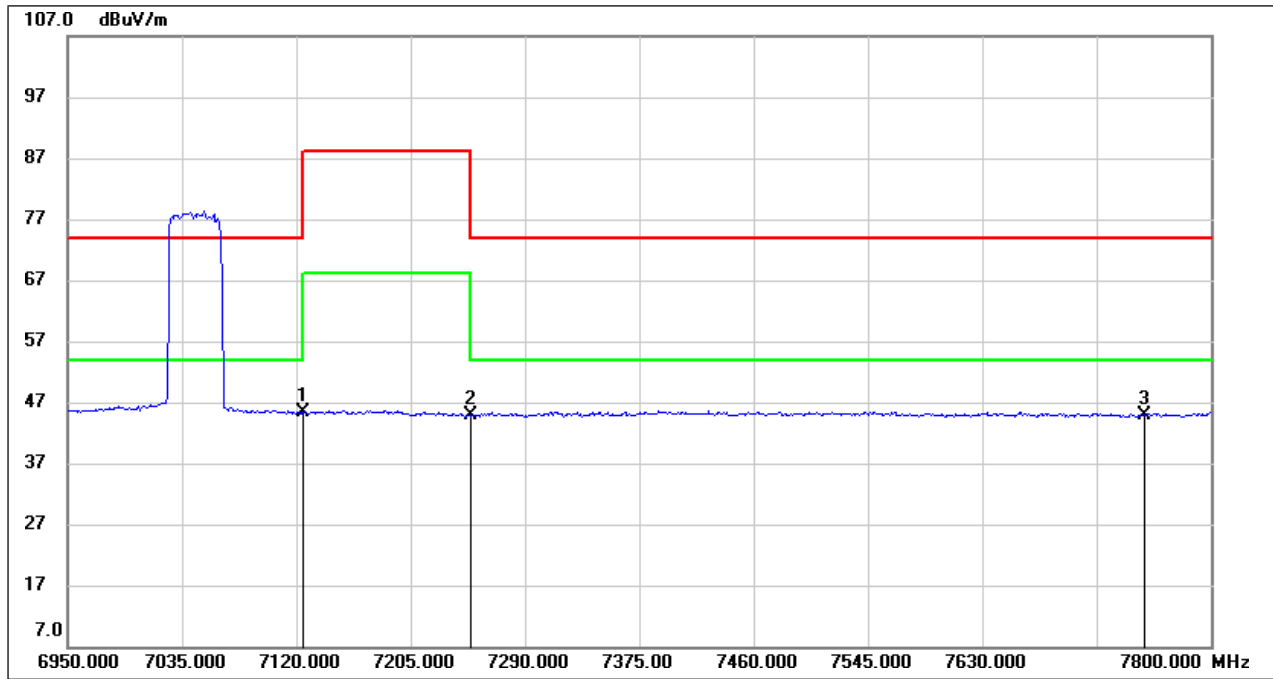


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	-0.02	45.36	45.34	54.00	-8.66	AVG
2	7250.000	-0.41	45.27	44.86	54.00	-9.14	AVG
3	7750.000	-0.21	45.08	44.87	54.00	-9.13	AVG

Test Mode:	802.11ax HE80 PK (996Tone Ru67)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

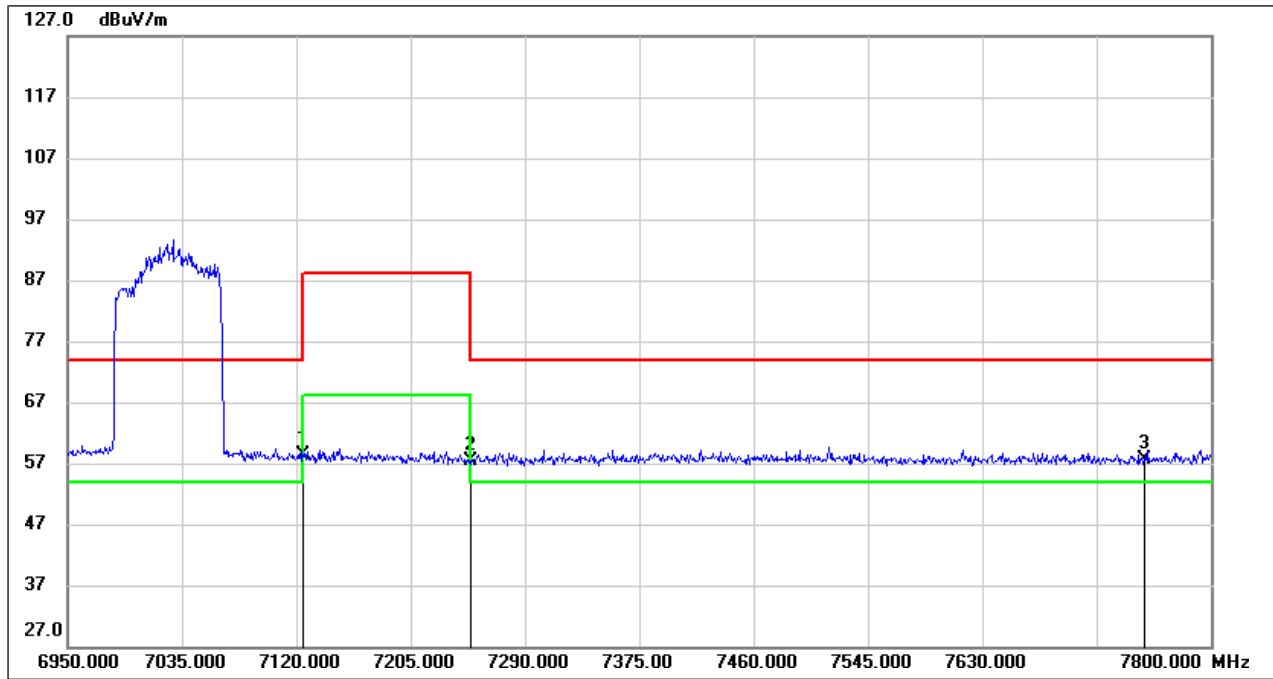

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	12.91	45.36	58.27	74.00	-15.73	peak
2	7250.000	12.00	45.27	57.27	74.00	-16.73	peak
3	7750.000	12.46	45.08	57.54	74.00	-16.46	peak


Test Mode:	802.11ax HE80 AV (996Tone Ru67)	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

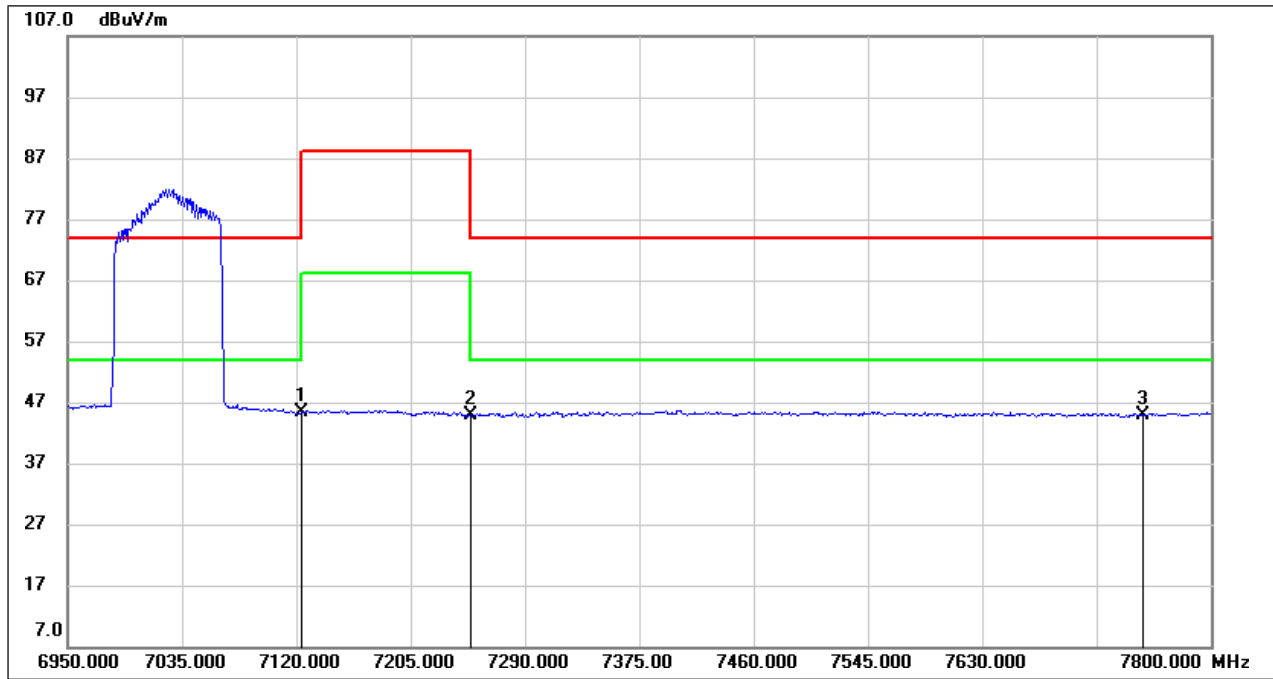

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	0.02	45.36	45.38	54.00	-8.62	AVG
2	7250.000	-0.48	45.27	44.79	54.00	-9.21	AVG
3	7750.000	-0.22	45.08	44.86	54.00	-9.14	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~9 GHZ)

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

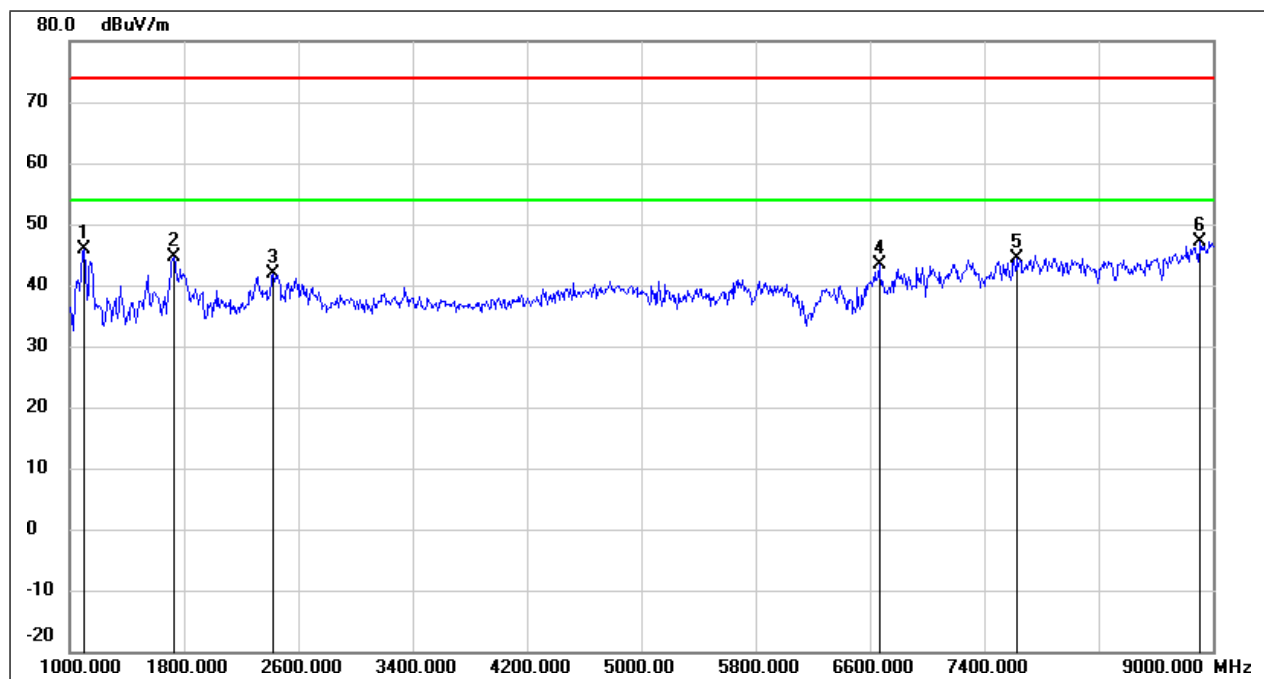


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1096.000	60.51	-14.58	45.93	74.00	-28.07	peak
2	1728.000	56.55	-11.95	44.60	74.00	-29.40	peak
3	2424.000	50.73	-8.88	41.85	74.00	-32.15	peak
4	6664.000	38.79	4.54	43.33	74.00	-30.67	peak
5	7632.000	38.66	5.68	44.34	74.00	-29.66	peak
6	8912.000	37.93	9.11	47.04	74.00	-26.96	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 5V

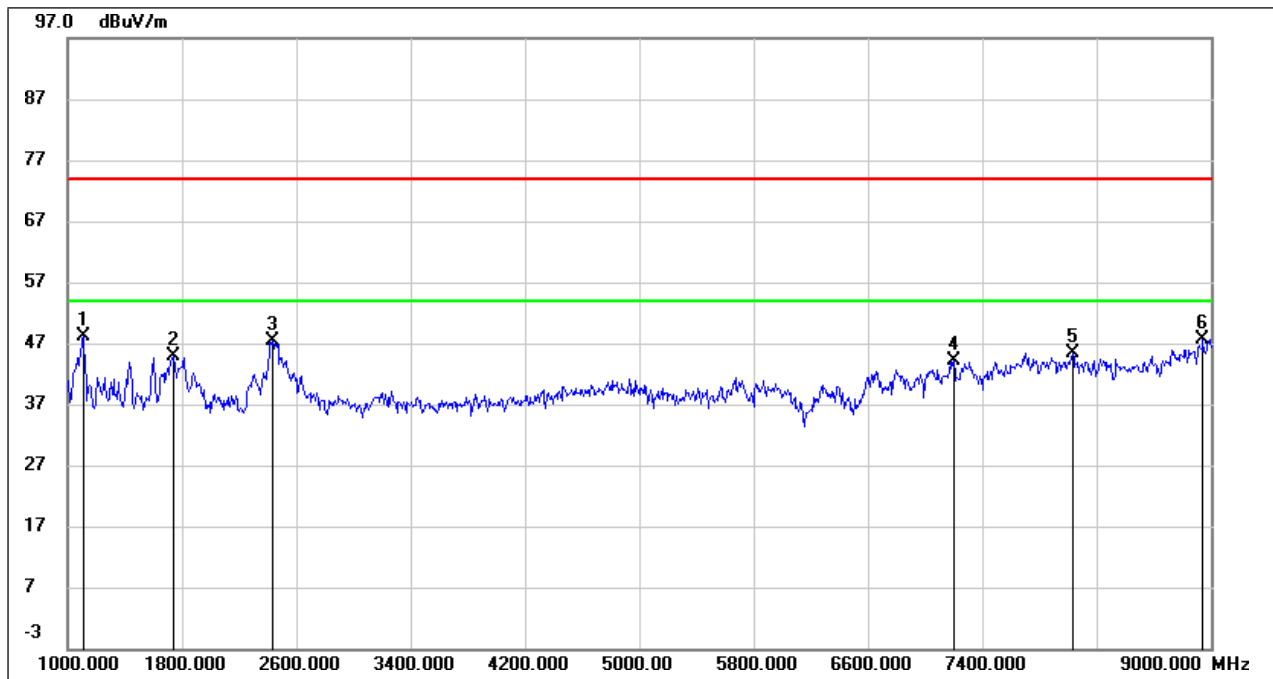


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	62.75	-14.51	48.24	74.00	-25.76	peak
2	1744.000	56.68	-11.90	44.78	74.00	-29.22	peak
3	2432.000	56.21	-8.85	47.36	74.00	-26.64	peak
4	7200.000	38.02	6.00	44.02	74.00	-29.98	peak
5	8032.000	39.78	5.69	45.47	74.00	-28.53	peak
6	8944.000	38.31	9.35	47.66	74.00	-26.34	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6175
Polarity:	Horizontal	Test Voltage:	DC 5V

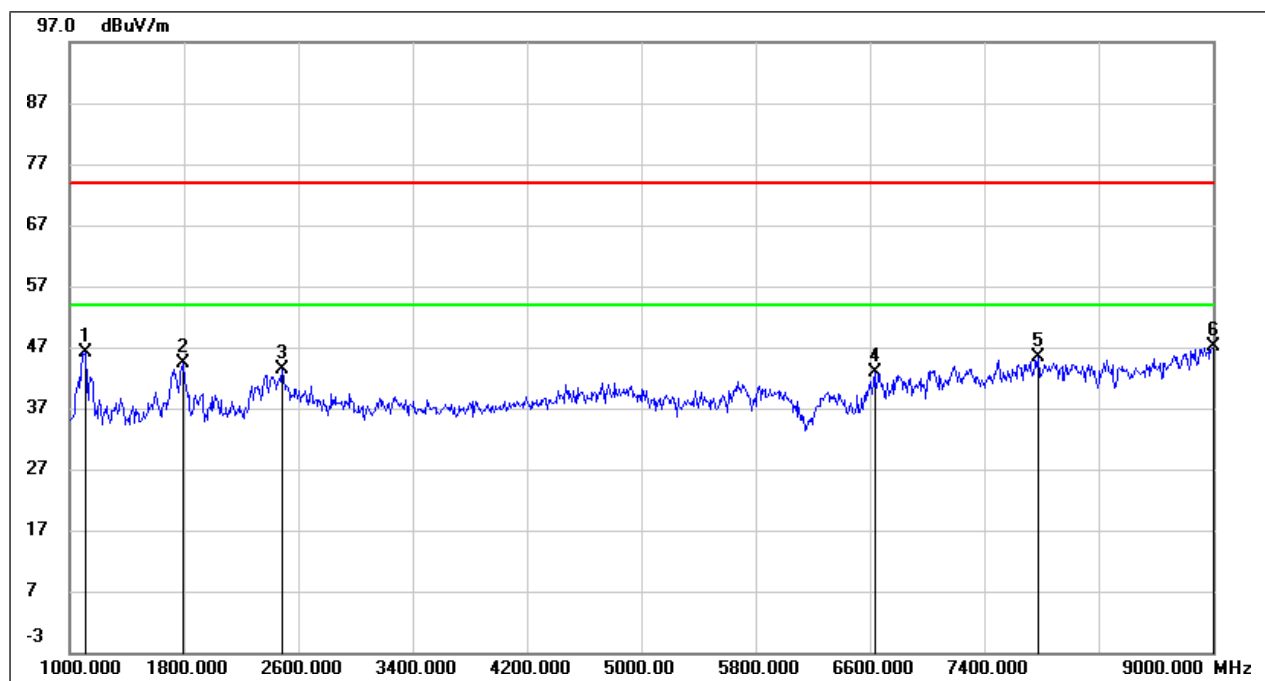


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	60.55	-14.51	46.04	74.00	-27.96	peak
2	1792.000	56.09	-11.75	44.34	74.00	-29.66	peak
3	2488.000	51.84	-8.55	43.29	74.00	-30.71	peak
4	6632.000	38.47	4.38	42.85	74.00	-31.15	peak
5	7776.000	39.74	5.67	45.41	74.00	-28.59	peak
6	9000.000	37.44	9.74	47.18	74.00	-26.82	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6175
Polarity:	Vertical	Test Voltage:	DC 5V

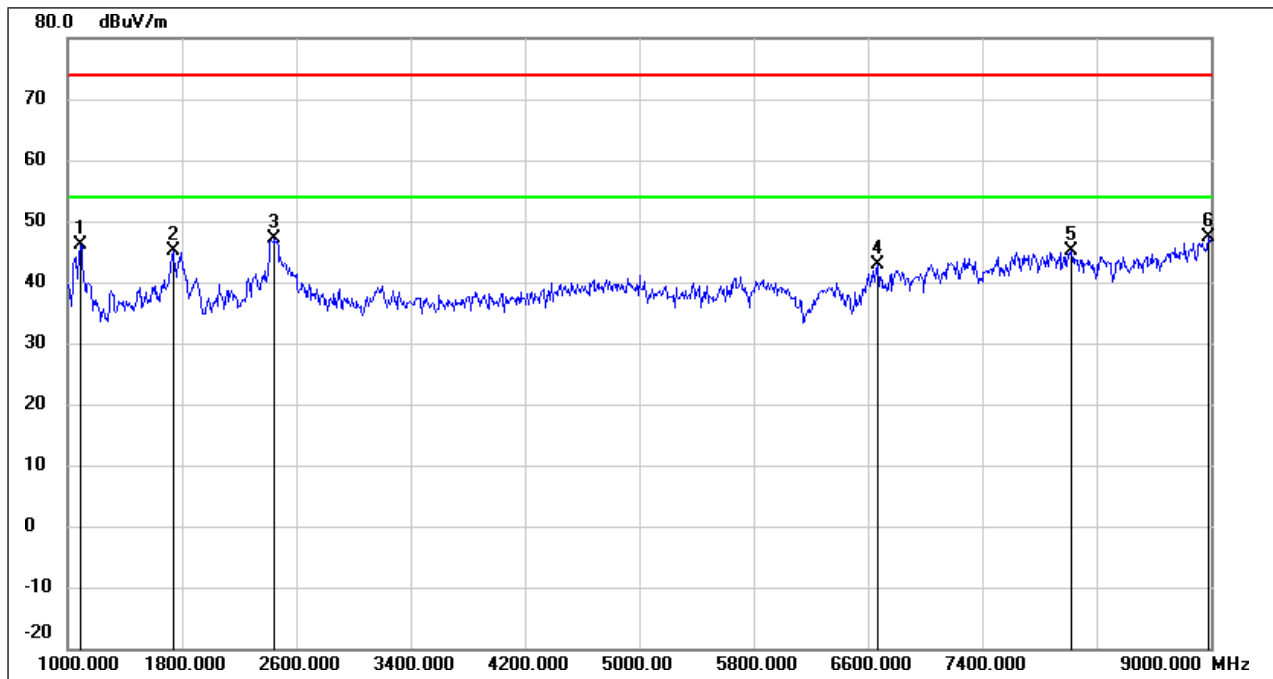


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1088.000	60.77	-14.62	46.15	74.00	-27.85	peak
2	1736.000	56.96	-11.93	45.03	74.00	-28.97	peak
3	2448.000	55.85	-8.77	47.08	74.00	-26.92	peak
4	6672.000	38.28	4.57	42.85	74.00	-31.15	peak
5	8024.000	39.35	5.68	45.03	74.00	-28.97	peak
6	8984.000	37.65	9.62	47.27	74.00	-26.73	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6415
Polarity:	Horizontal	Test Voltage:	DC 5V

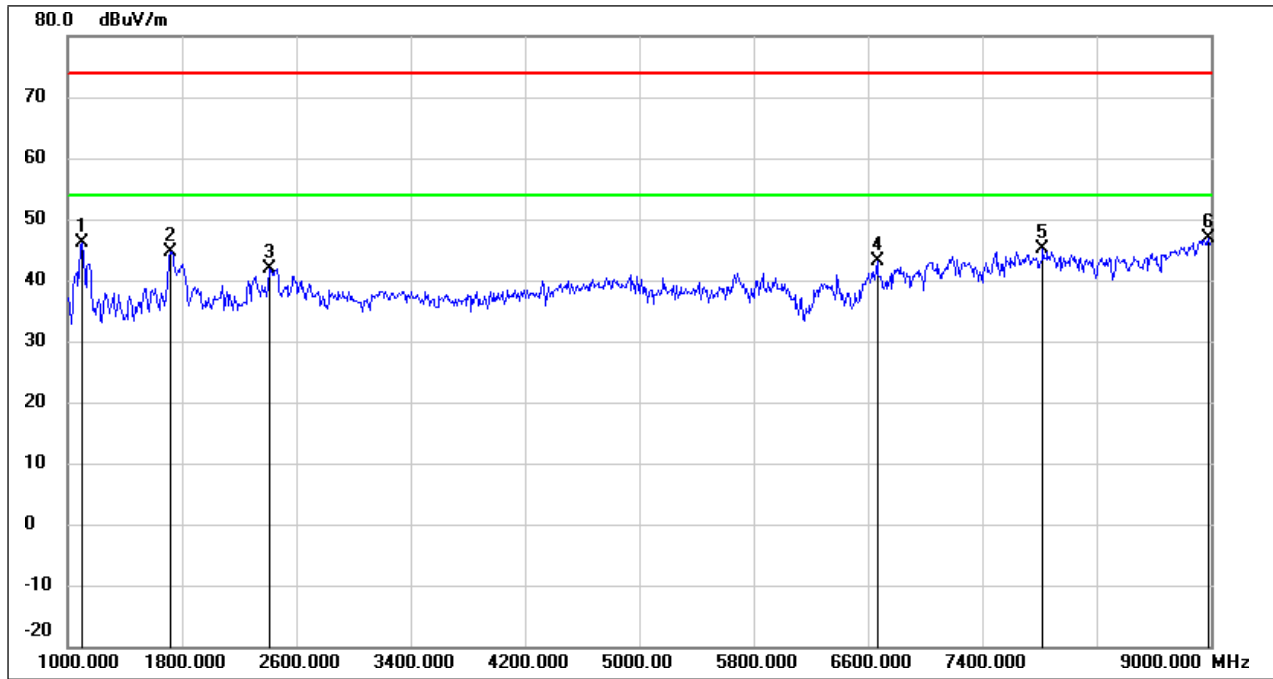


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1096.000	60.59	-14.58	46.01	74.00	-27.99	peak
2	1720.000	56.58	-11.98	44.60	74.00	-29.40	peak
3	2408.000	50.76	-8.96	41.80	74.00	-32.20	peak
4	6664.000	38.66	4.54	43.20	74.00	-30.80	peak
5	7824.000	39.44	5.66	45.10	74.00	-28.90	peak
6	8984.000	37.18	9.62	46.80	74.00	-27.20	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6415
Polarity:	Vertical	Test Voltage:	DC 5V

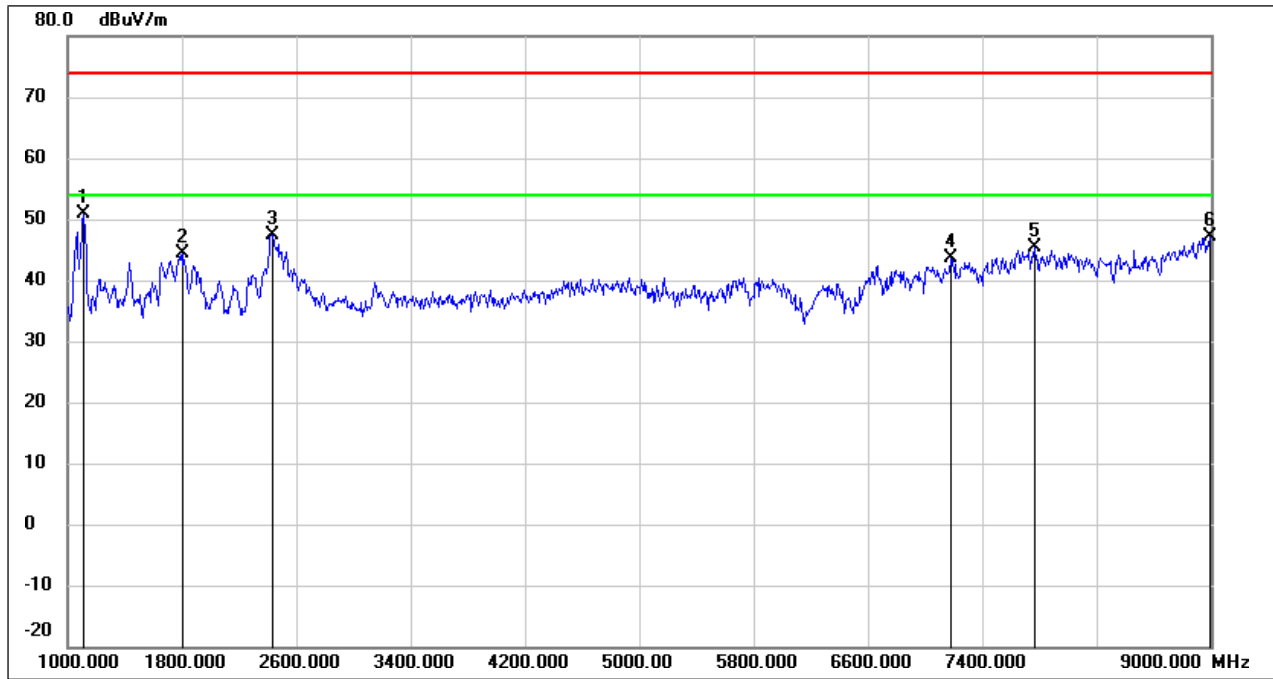


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	65.34	-14.51	50.83	74.00	-23.17	peak
2	1808.000	56.10	-11.69	44.41	74.00	-29.59	peak
3	2432.000	56.22	-8.85	47.37	74.00	-26.63	peak
4	7176.000	37.63	6.02	43.65	74.00	-30.35	peak
5	7768.000	39.67	5.66	45.33	74.00	-28.67	peak
6	8992.000	37.38	9.68	47.06	74.00	-26.94	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6435
Polarity:	Horizontal	Test Voltage:	DC 5V

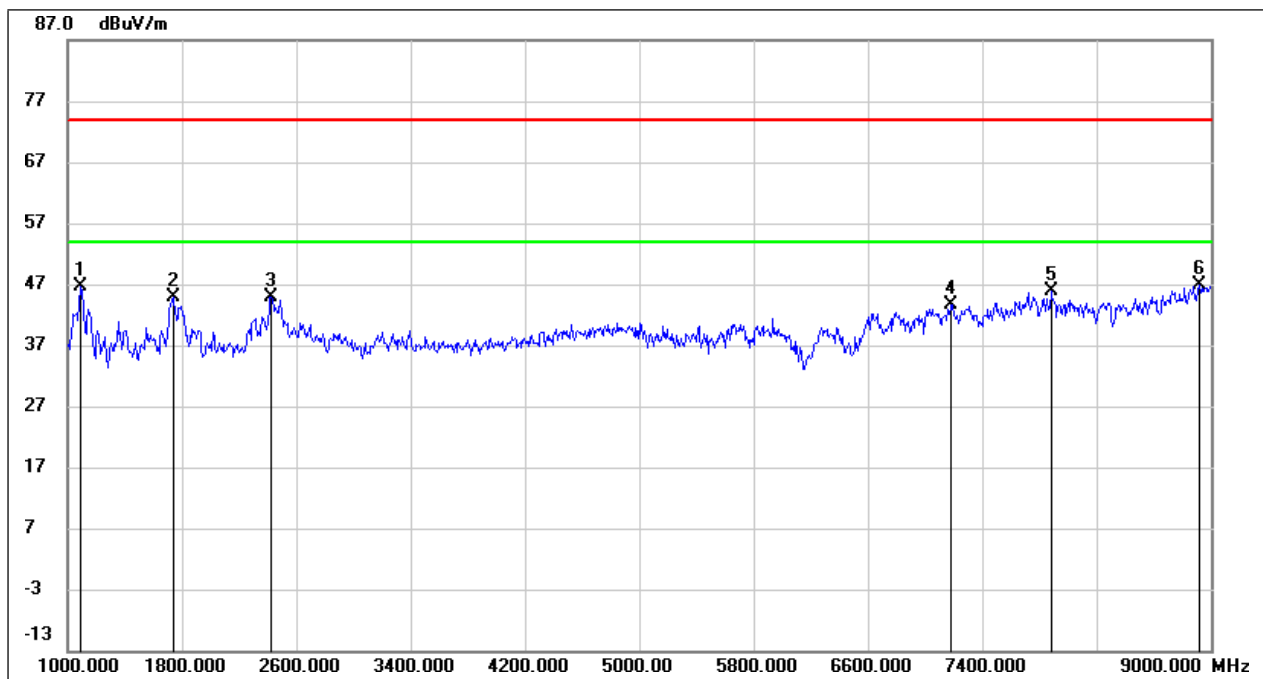


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1088.000	61.31	-14.62	46.69	74.00	-27.31	peak
2	1736.000	56.85	-11.93	44.92	74.00	-29.08	peak
3	2424.000	53.69	-8.88	44.81	74.00	-29.19	peak
4	7184.000	37.67	6.01	43.68	74.00	-30.32	peak
5	7880.000	40.21	5.66	45.87	74.00	-28.13	peak
6	8920.000	37.70	9.17	46.87	74.00	-27.13	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6435
Polarity:	Vertical	Test Voltage:	DC 5V

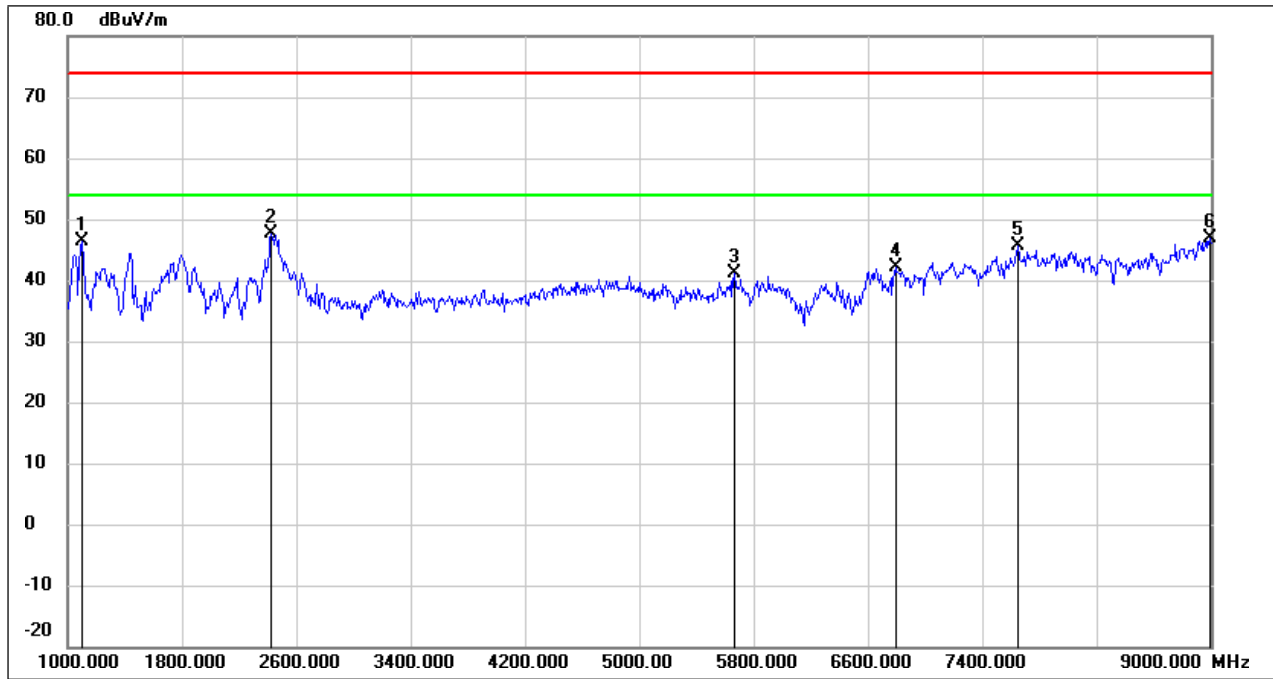


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	61.04	-14.55	46.49	74.00	-27.51	peak
2	2424.000	56.53	-8.88	47.65	74.00	-26.35	peak
3	5664.000	40.16	0.89	41.05	74.00	-32.95	peak
4	6792.000	36.90	5.18	42.08	74.00	-31.92	peak
5	7648.000	39.92	5.68	45.60	74.00	-28.40	peak
6	8992.000	37.09	9.68	46.77	74.00	-27.23	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6475
Polarity:	Horizontal	Test Voltage:	DC 5V

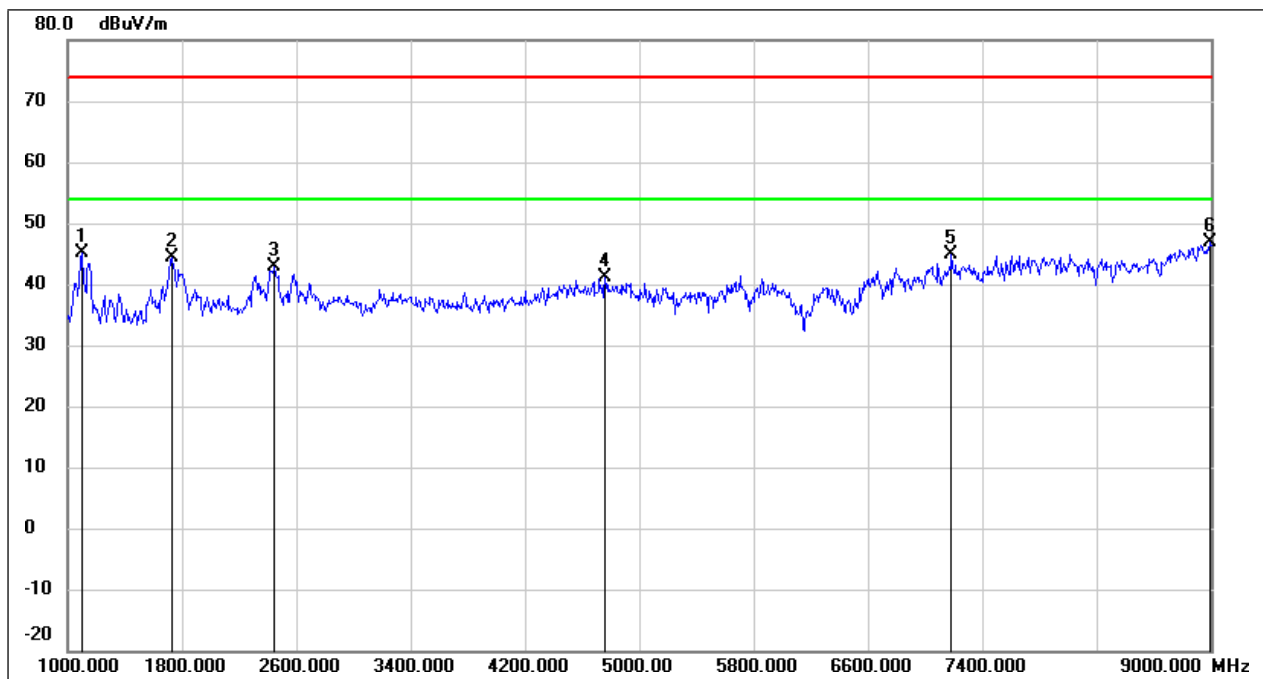


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1096.000	59.69	-14.58	45.11	74.00	-28.89	peak
2	1728.000	56.25	-11.95	44.30	74.00	-29.70	peak
3	2448.000	51.66	-8.77	42.89	74.00	-31.11	peak
4	4760.000	42.24	-1.11	41.13	74.00	-32.87	peak
5	7184.000	38.78	6.01	44.79	74.00	-29.21	peak
6	8992.000	37.21	9.68	46.89	74.00	-27.11	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6475
Polarity:	Vertical	Test Voltage:	DC 5V

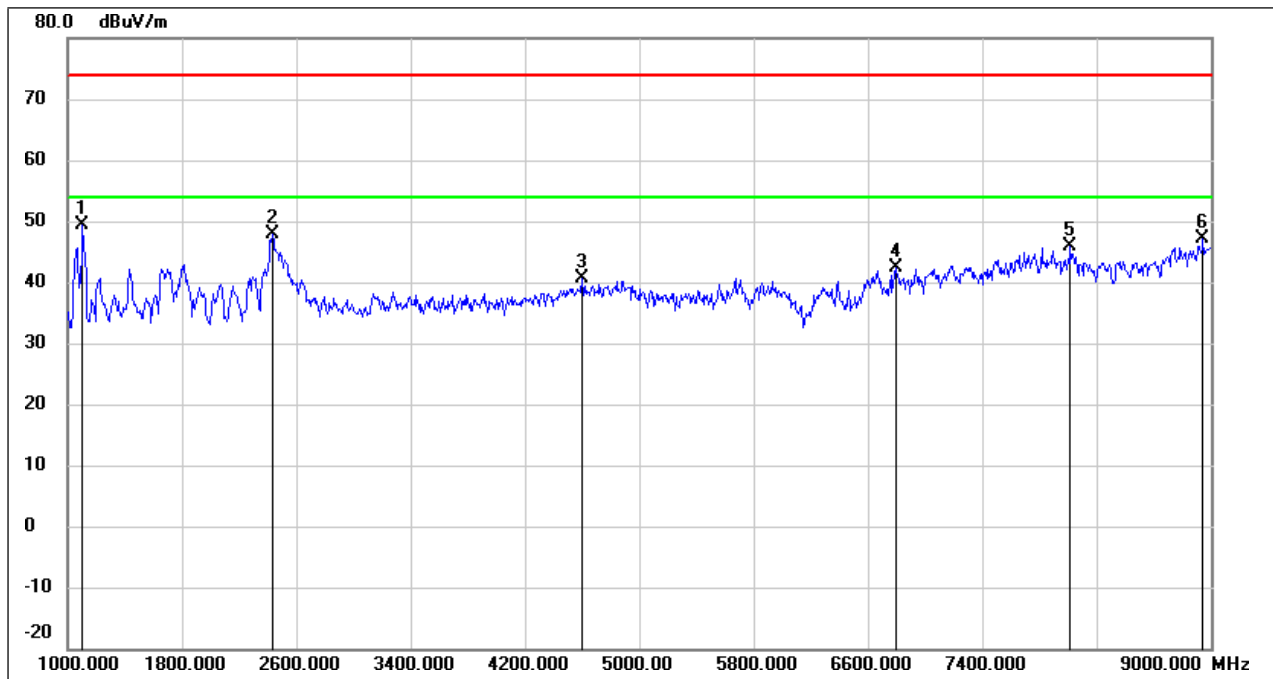


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	63.93	-14.55	49.38	74.00	-24.62	peak
2	2432.000	56.65	-8.85	47.80	74.00	-26.20	peak
3	4600.000	42.40	-1.74	40.66	74.00	-33.34	peak
4	6792.000	37.26	5.18	42.44	74.00	-31.56	peak
5	8016.000	40.24	5.67	45.91	74.00	-28.09	peak
6	8944.000	37.71	9.35	47.06	74.00	-26.94	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6515
Polarity:	Horizontal	Test Voltage:	DC 5V

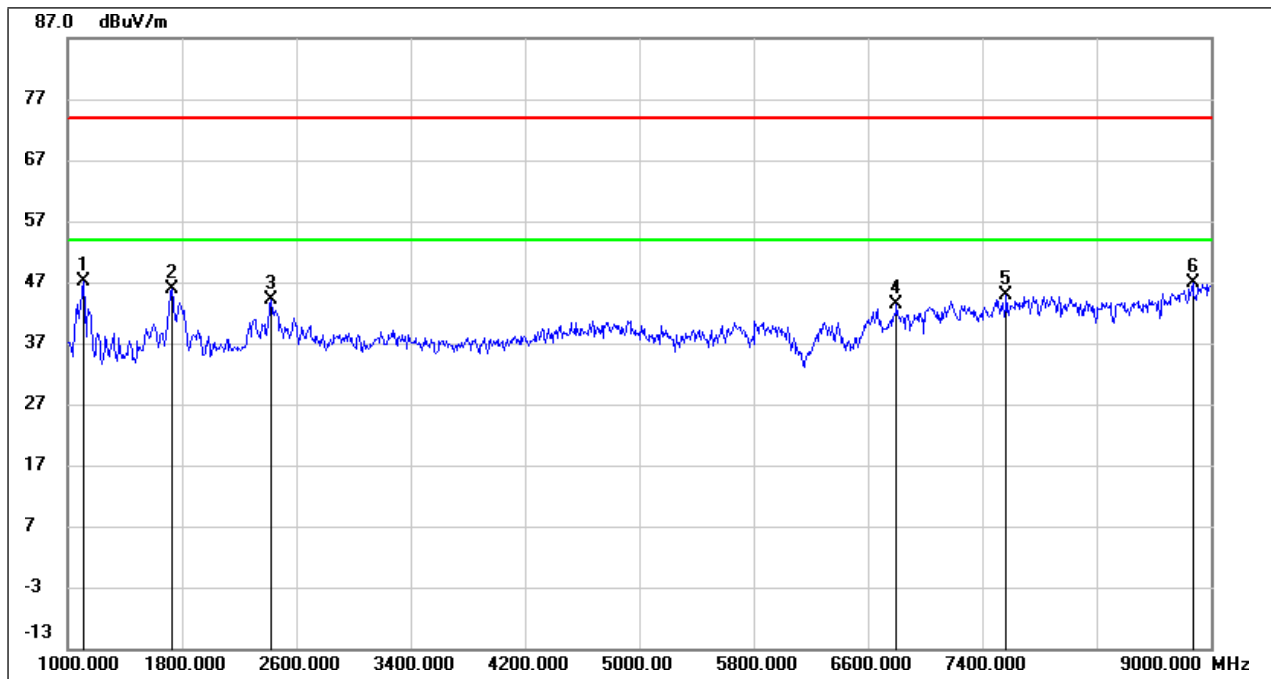


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	61.59	-14.51	47.08	74.00	-26.92	peak
2	1728.000	57.72	-11.95	45.77	74.00	-28.23	peak
3	2424.000	53.02	-8.88	44.14	74.00	-29.86	peak
4	6800.000	38.29	5.21	43.50	74.00	-30.50	peak
5	7568.000	39.29	5.68	44.97	74.00	-29.03	peak
6	8872.000	38.06	8.85	46.91	74.00	-27.09	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6515
Polarity:	Vertical	Test Voltage:	DC 5V

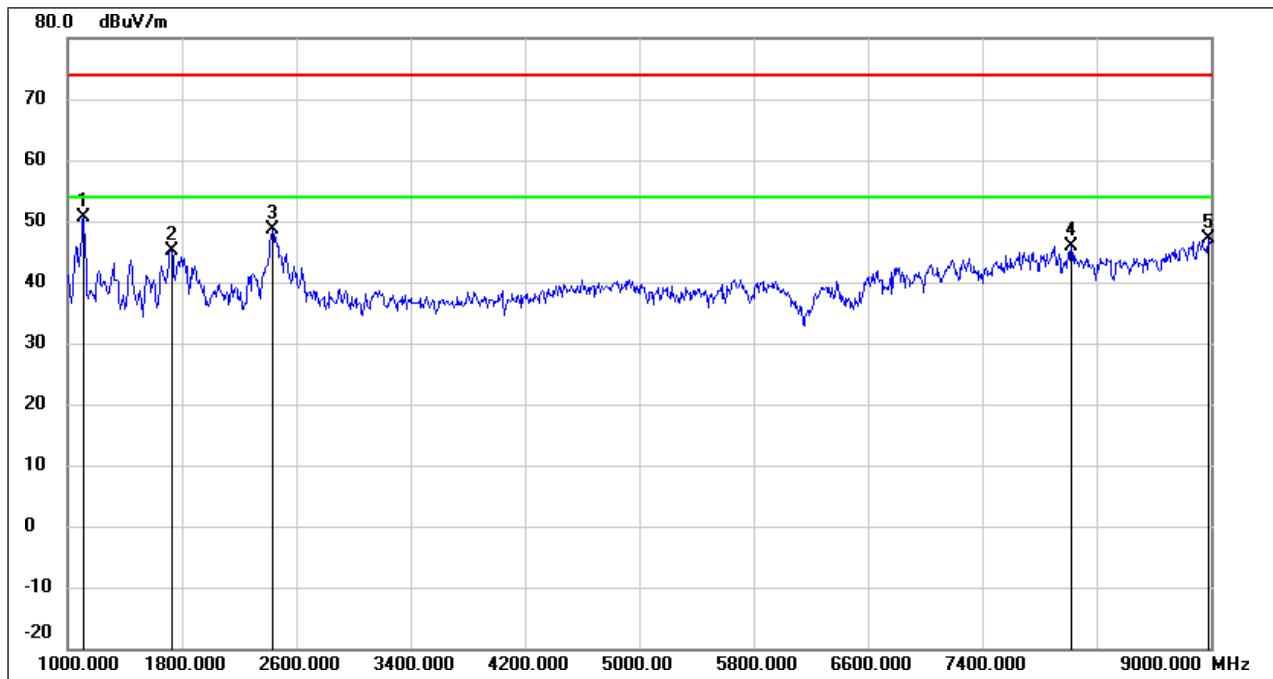


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	65.02	-14.51	50.51	74.00	-23.49	peak
2	1728.000	57.18	-11.95	45.23	74.00	-28.77	peak
3	2432.000	57.43	-8.85	48.58	74.00	-25.42	peak
4	8024.000	40.14	5.68	45.82	74.00	-28.18	peak
5	8984.000	37.47	9.62	47.09	74.00	-26.91	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6535
Polarity:	Horizontal	Test Voltage:	DC 5V

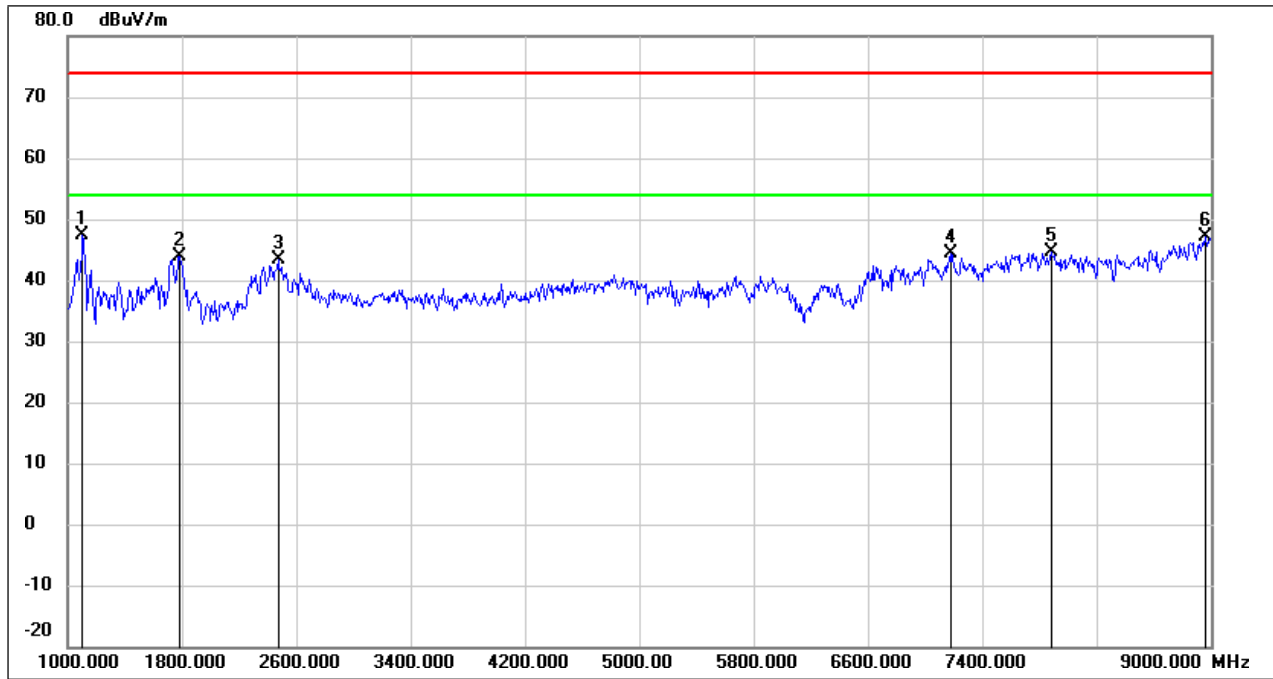


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	62.00	-14.55	47.45	74.00	-26.55	peak
2	1784.000	55.67	-11.77	43.90	74.00	-30.10	peak
3	2472.000	51.91	-8.63	43.28	74.00	-30.72	peak
4	7176.000	38.47	6.02	44.49	74.00	-29.51	peak
5	7880.000	39.07	5.66	44.73	74.00	-29.27	peak
6	8960.000	37.61	9.46	47.07	74.00	-26.93	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6535
Polarity:	Vertical	Test Voltage:	DC 5V

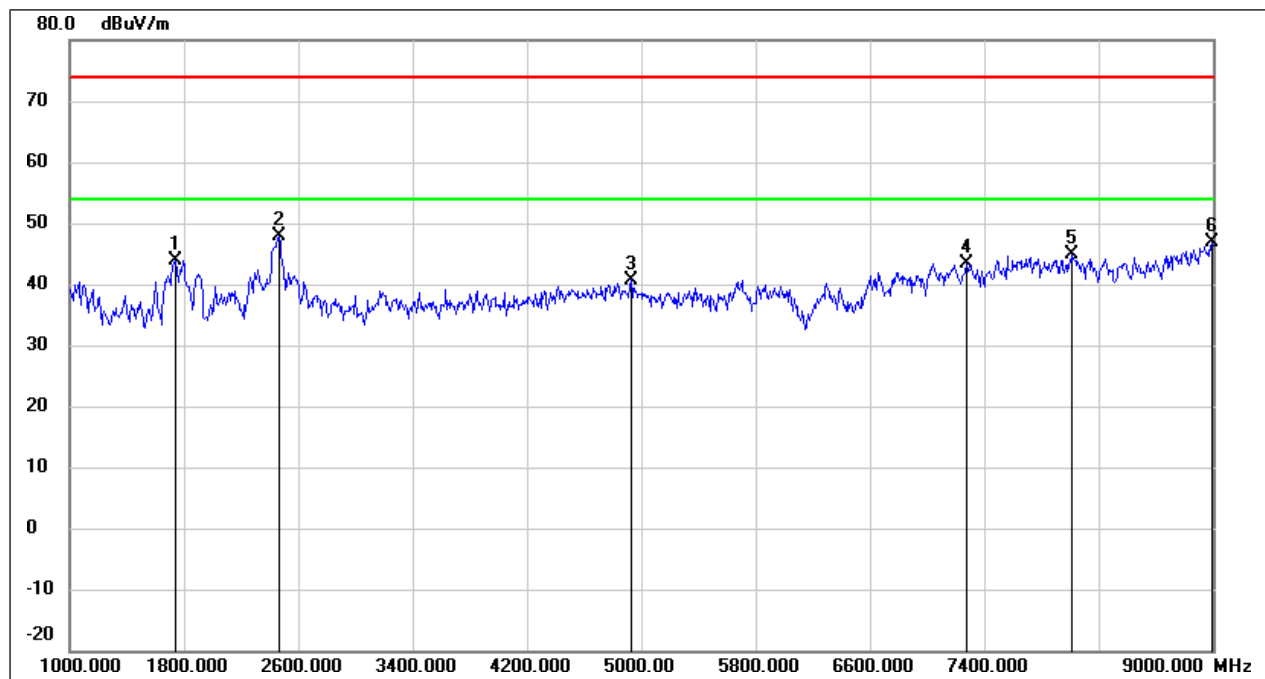


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1744.000	55.80	-11.90	43.90	74.00	-30.10	peak
2	2464.000	56.55	-8.68	47.87	74.00	-26.13	peak
3	4928.000	41.19	-0.44	40.75	74.00	-33.25	peak
4	7272.000	37.46	5.92	43.38	74.00	-30.62	peak
5	8016.000	39.31	5.67	44.98	74.00	-29.02	peak
6	8992.000	37.16	9.68	46.84	74.00	-27.16	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6715
Polarity:	Horizontal	Test Voltage:	DC 5V

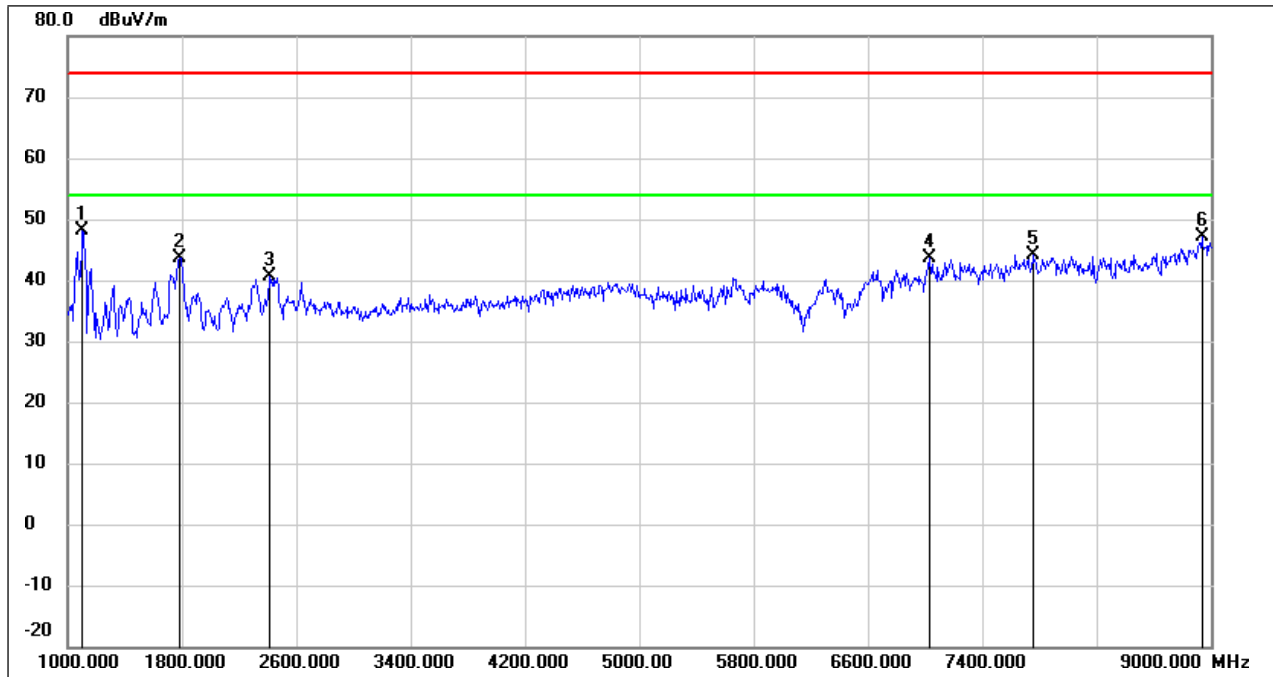


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	62.79	-14.55	48.24	74.00	-25.76	peak
2	1784.000	55.34	-11.77	43.57	74.00	-30.43	peak
3	2416.000	49.47	-8.92	40.55	74.00	-33.45	peak
4	7032.000	37.44	6.17	43.61	74.00	-30.39	peak
5	7752.000	38.50	5.66	44.16	74.00	-29.84	peak
6	8936.000	37.73	9.29	47.02	74.00	-26.98	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6715
Polarity:	Vertical	Test Voltage:	DC 5V

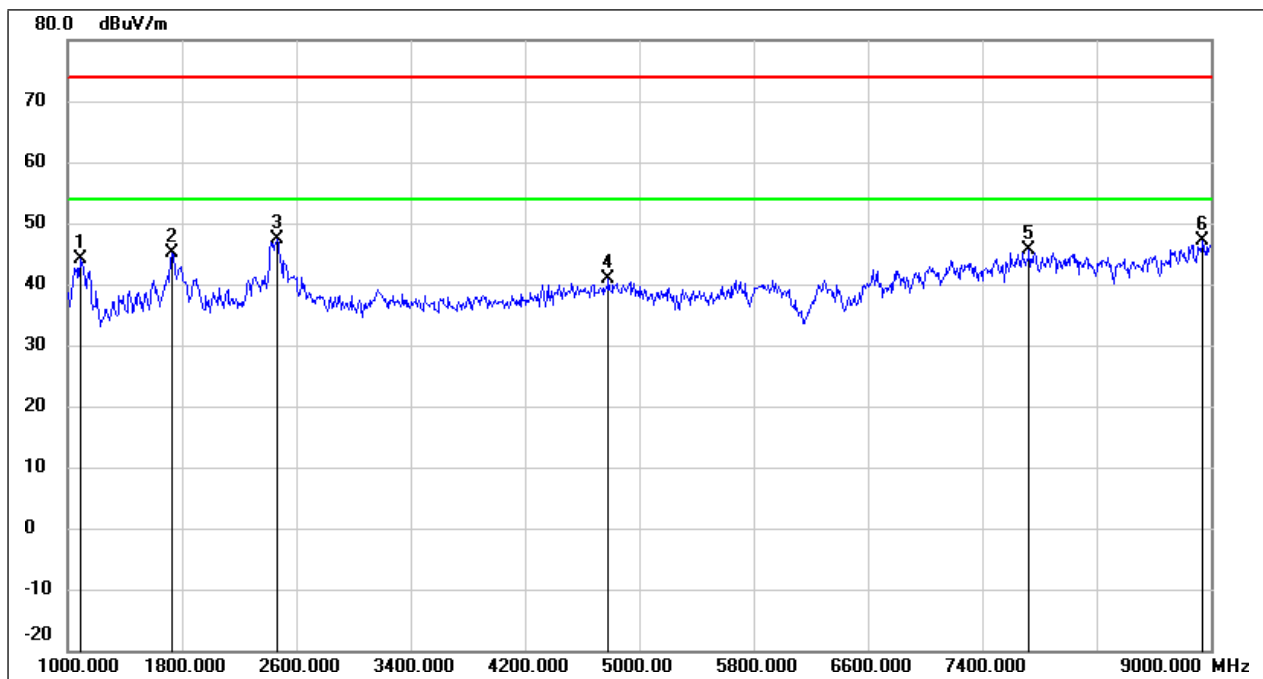


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1088.000	58.85	-14.62	44.23	74.00	-29.77	peak
2	1728.000	57.01	-11.95	45.06	74.00	-28.94	peak
3	2464.000	56.10	-8.68	47.42	74.00	-26.58	peak
4	4784.000	41.92	-1.01	40.91	74.00	-33.09	peak
5	7728.000	39.89	5.68	45.57	74.00	-28.43	peak
6	8944.000	37.73	9.35	47.08	74.00	-26.92	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6855
Polarity:	Horizontal	Test Voltage:	DC 5V

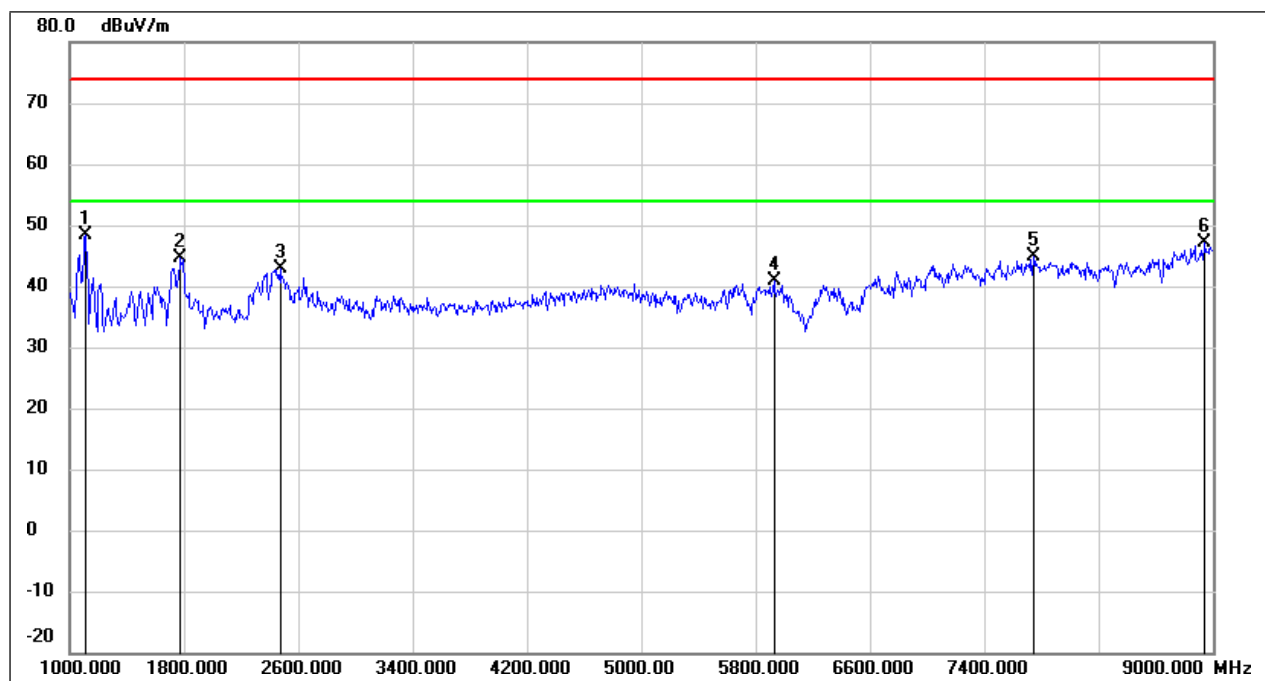


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	62.99	-14.51	48.48	74.00	-25.52	peak
2	1776.000	56.54	-11.80	44.74	74.00	-29.26	peak
3	2472.000	51.59	-8.63	42.96	74.00	-31.04	peak
4	5928.000	39.27	1.64	40.91	74.00	-33.09	peak
5	7744.000	39.11	5.68	44.79	74.00	-29.21	peak
6	8944.000	37.77	9.35	47.12	74.00	-26.88	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6855
Polarity:	Vertical	Test Voltage:	DC 5V

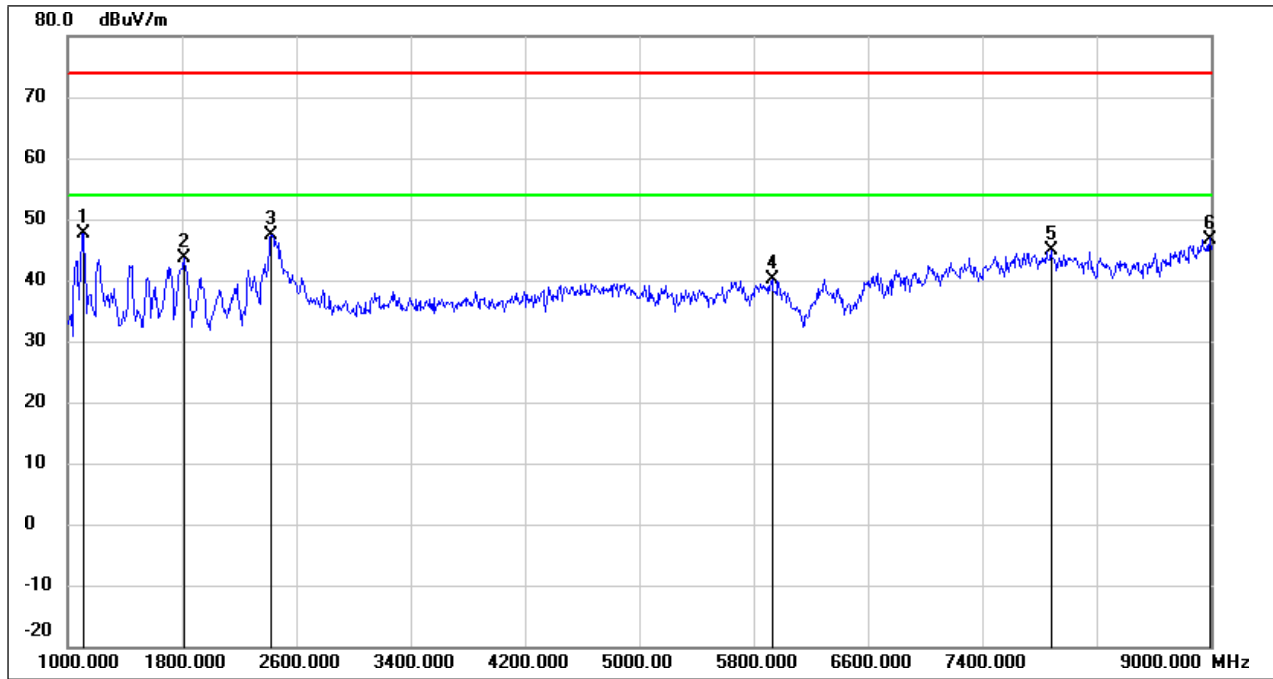


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	62.17	-14.51	47.66	74.00	-26.34	peak
2	1816.000	55.41	-11.67	43.74	74.00	-30.26	peak
3	2424.000	56.30	-8.88	47.42	74.00	-26.58	peak
4	5928.000	38.49	1.64	40.13	74.00	-33.87	peak
5	7880.000	39.10	5.66	44.76	74.00	-29.24	peak
6	8992.000	37.07	9.68	46.75	74.00	-27.25	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6875
Polarity:	Horizontal	Test Voltage:	DC 5V

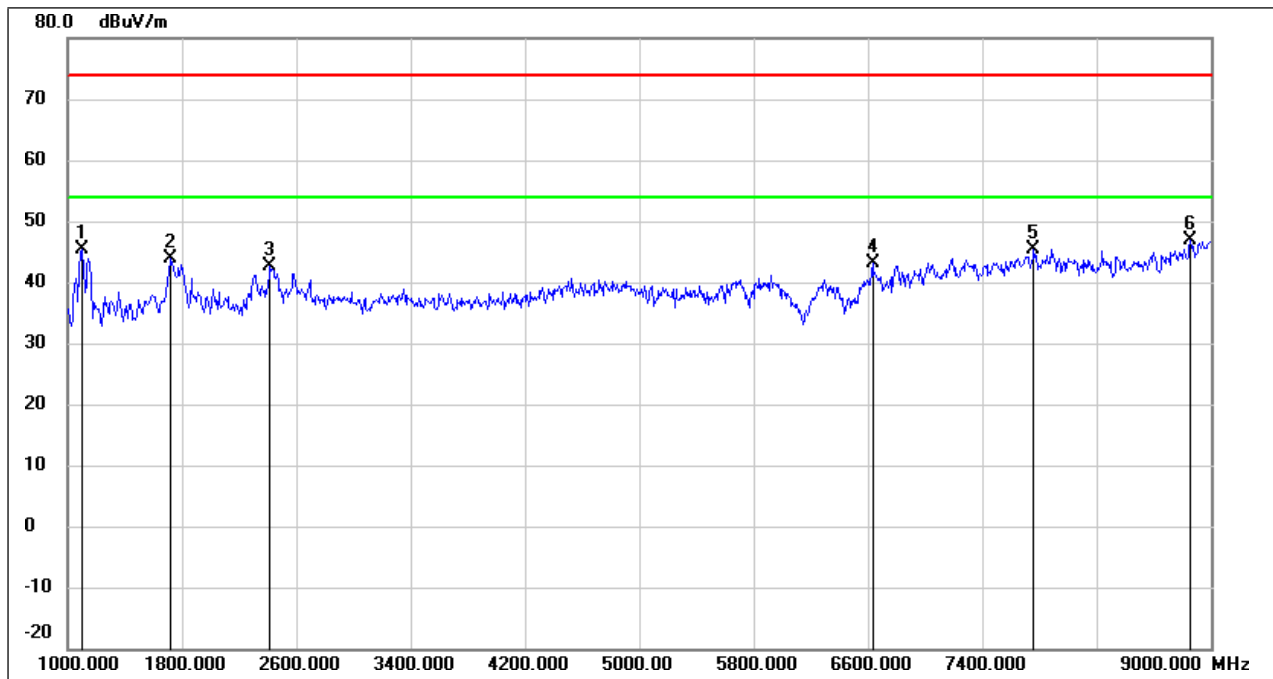


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1096.000	60.04	-14.58	45.46	74.00	-28.54	peak
2	1720.000	55.93	-11.98	43.95	74.00	-30.05	peak
3	2416.000	51.44	-8.92	42.52	74.00	-31.48	peak
4	6632.000	38.70	4.38	43.08	74.00	-30.92	peak
5	7760.000	39.80	5.67	45.47	74.00	-28.53	peak
6	8856.000	38.03	8.73	46.76	74.00	-27.24	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	6875
Polarity:	Vertical	Test Voltage:	DC 5V

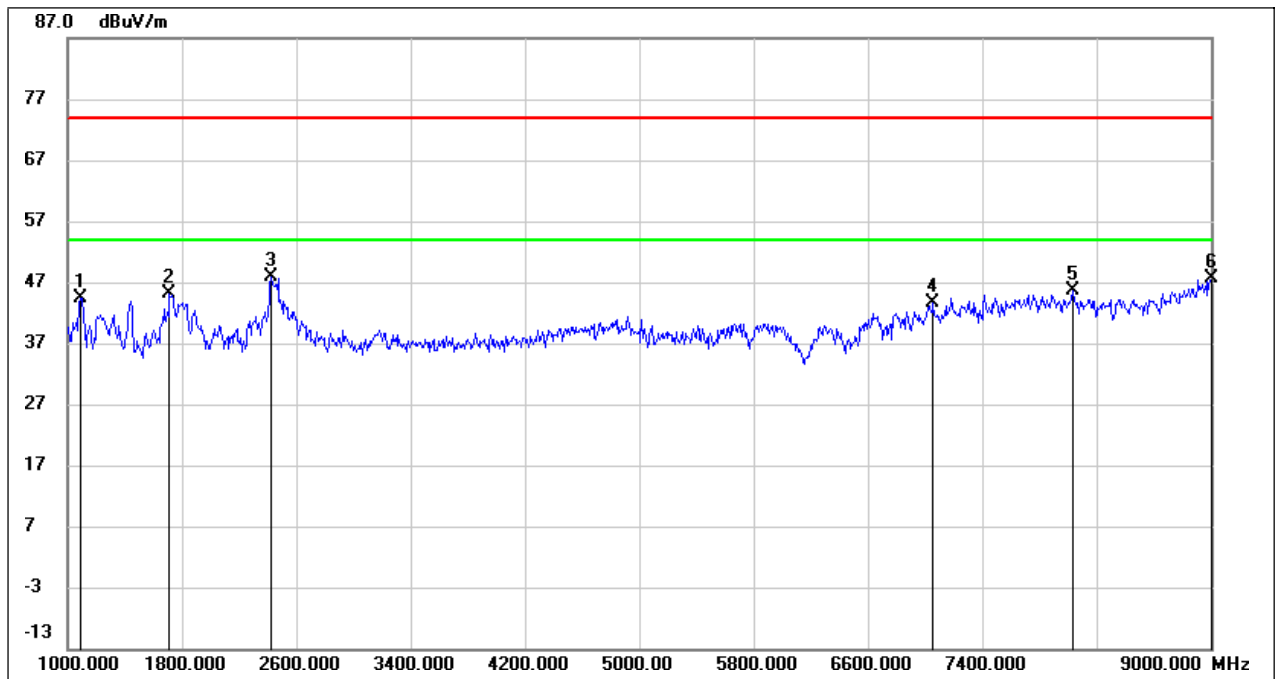


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1088.000	59.01	-14.62	44.39	74.00	-29.61	peak
2	1712.000	57.12	-12.01	45.11	74.00	-28.89	peak
3	2424.000	56.83	-8.88	47.95	74.00	-26.05	peak
4	7056.000	37.44	6.14	43.58	74.00	-30.42	peak
5	8032.000	39.90	5.69	45.59	74.00	-28.41	peak
6	9000.000	37.93	9.74	47.67	74.00	-26.33	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	7015
Polarity:	Horizontal	Test Voltage:	DC 5V

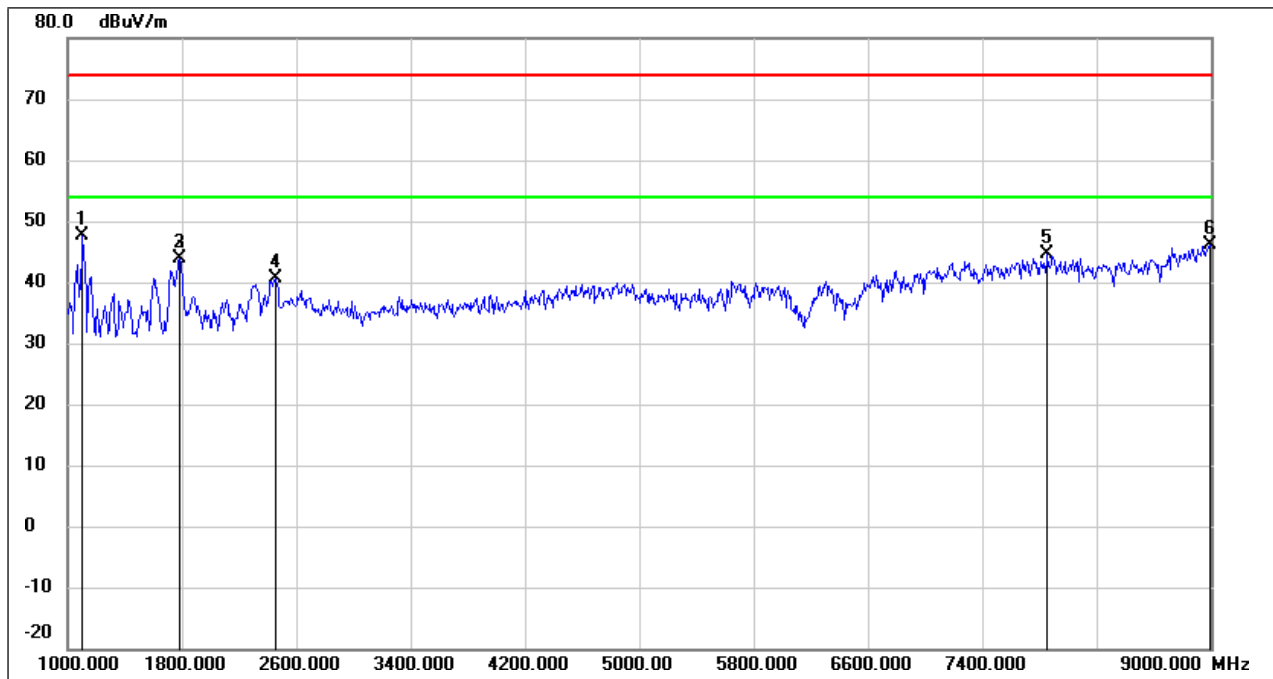


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	62.07	-14.55	47.52	74.00	-26.48	peak
2	1784.000	55.76	-11.77	43.99	74.00	-30.01	peak
3	1784.000	55.76	-11.77	43.99	74.00	-30.01	peak
4	2456.000	49.27	-8.71	40.56	74.00	-33.44	peak
5	7856.000	39.01	5.65	44.66	74.00	-29.34	peak
6	8992.000	36.51	9.68	46.19	74.00	-27.81	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	7015
Polarity:	Vertical	Test Voltage:	DC 5V

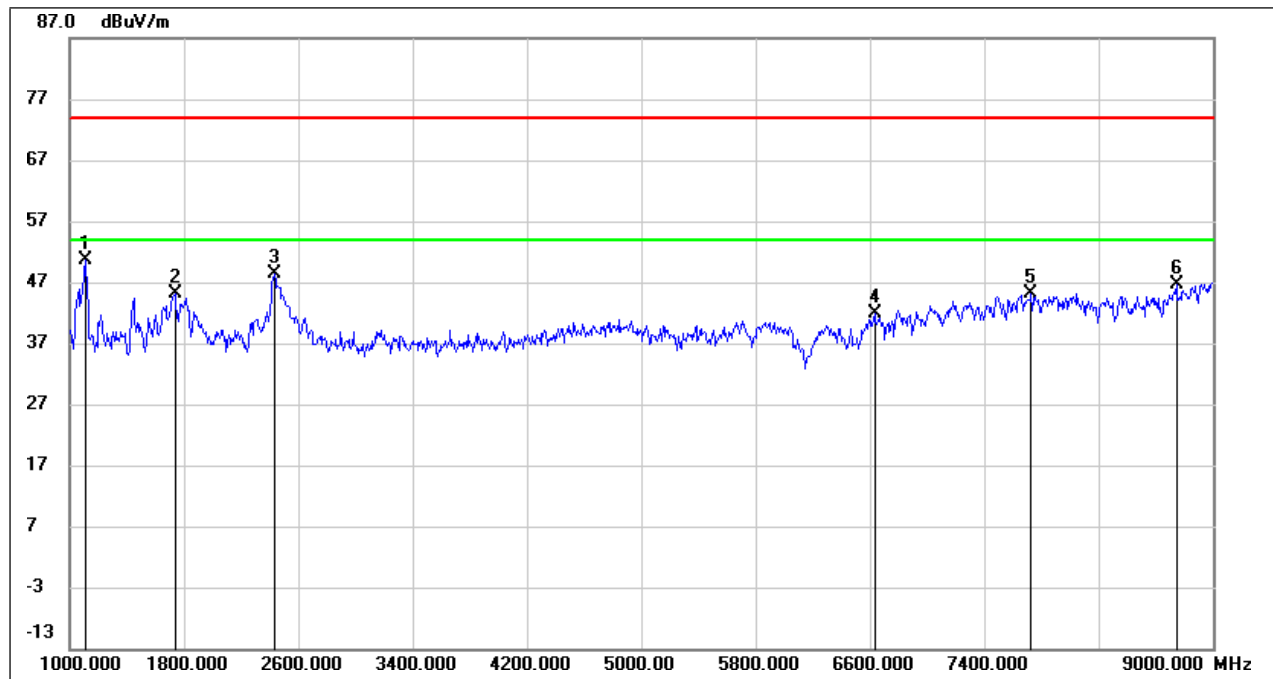


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	65.09	-14.51	50.58	74.00	-23.42	peak
2	1736.000	57.02	-11.93	45.09	74.00	-28.91	peak
3	2432.000	57.29	-8.85	48.44	74.00	-25.56	peak
4	6632.000	37.45	4.38	41.83	74.00	-32.17	peak
5	7728.000	39.44	5.68	45.12	74.00	-28.88	peak
6	8744.000	38.61	7.94	46.55	74.00	-27.45	peak

Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

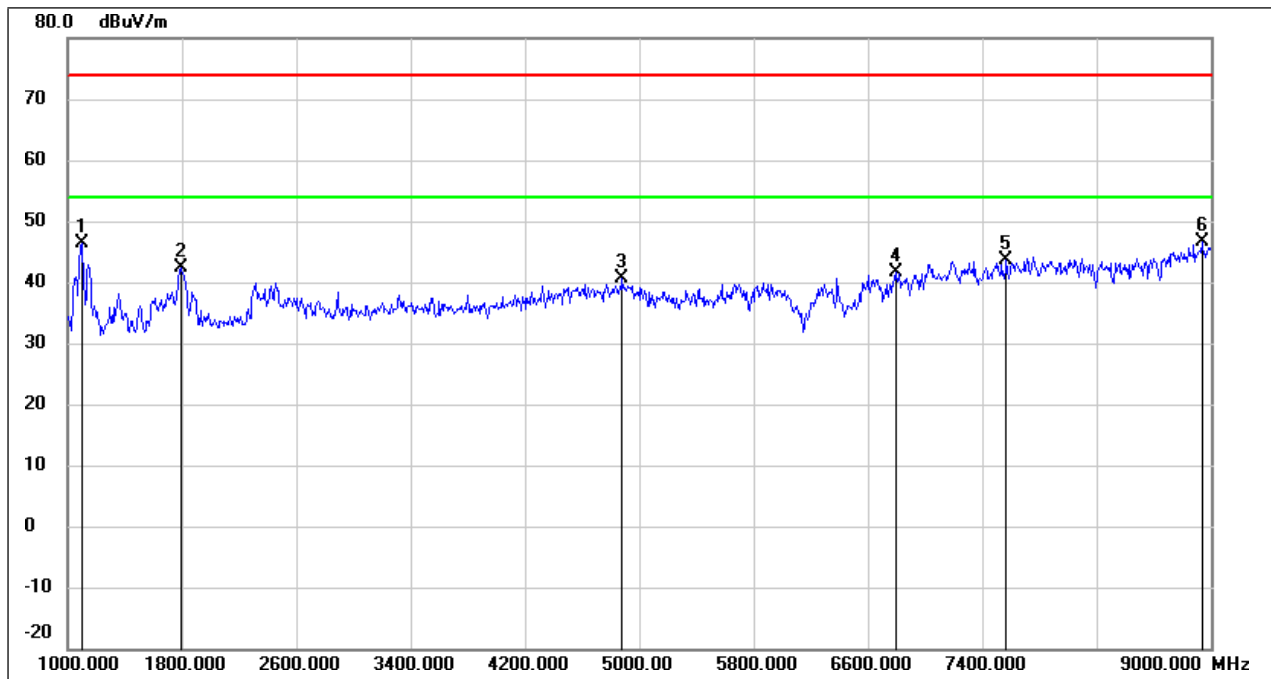

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1096.000	60.88	-14.58	46.30	74.00	-27.70	peak
2	1792.000	54.01	-11.75	42.26	74.00	-31.74	peak
3	4880.000	41.18	-0.63	40.55	74.00	-33.45	peak
4	6792.000	36.49	5.18	41.67	74.00	-32.33	peak
5	7568.000	37.85	5.68	43.53	74.00	-30.47	peak
6	8936.000	37.45	9.29	46.74	74.00	-27.26	peak


Test Mode:	802.11ax HE20 PK (242Tone Ru61)	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 5V

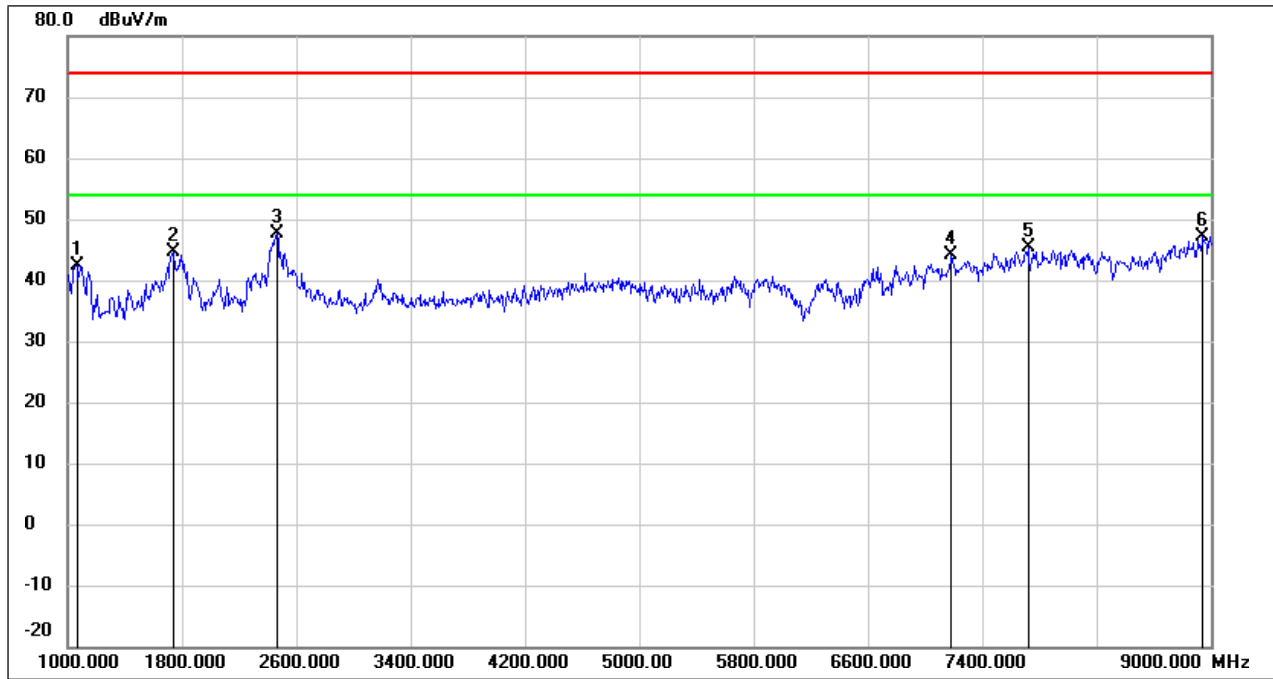

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1064.000	57.13	-14.73	42.40	74.00	-31.60	peak
2	1744.000	56.64	-11.90	44.74	74.00	-29.26	peak
3	2464.000	56.25	-8.68	47.57	74.00	-26.43	peak
4	7184.000	38.12	6.01	44.13	74.00	-29.87	peak
5	7720.000	39.62	5.67	45.29	74.00	-28.71	peak
6	8944.000	37.78	9.35	47.13	74.00	-26.87	peak


8.3. SPURIOUS EMISSIONS(9 GHZ~18 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5975
Polarity:	Horizontal	Test Voltage:	DC 5V

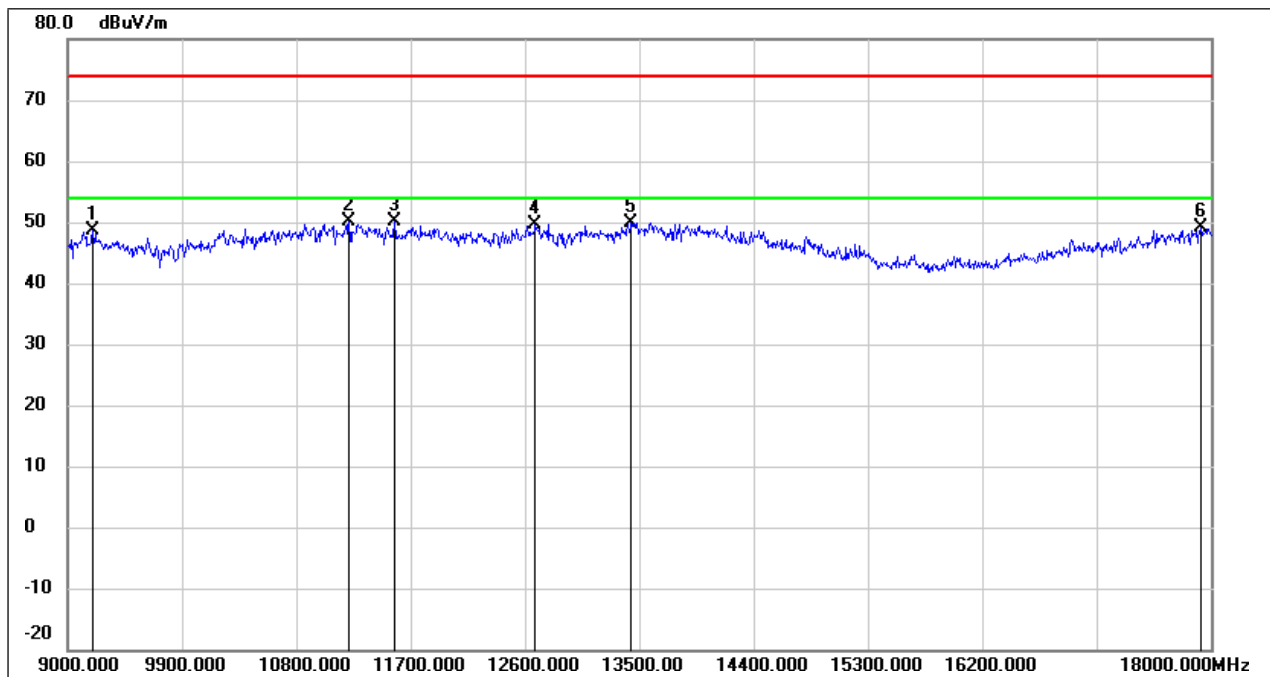


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9198.000	37.77	10.85	48.62	74.00	-25.38	peak
2	11214.000	34.69	15.51	50.20	74.00	-23.80	peak
3	11574.000	33.34	16.74	50.08	74.00	-23.92	peak
4	12681.000	31.68	18.03	49.71	74.00	-24.29	peak
5	13437.000	29.38	20.57	49.95	74.00	-24.05	peak
6	17919.000	24.46	24.64	49.10	74.00	-24.90	peak

Test Mode:	802.11a 20	Frequency(MHz):	5975
Polarity:	Vertical	Test Voltage:	DC 5V

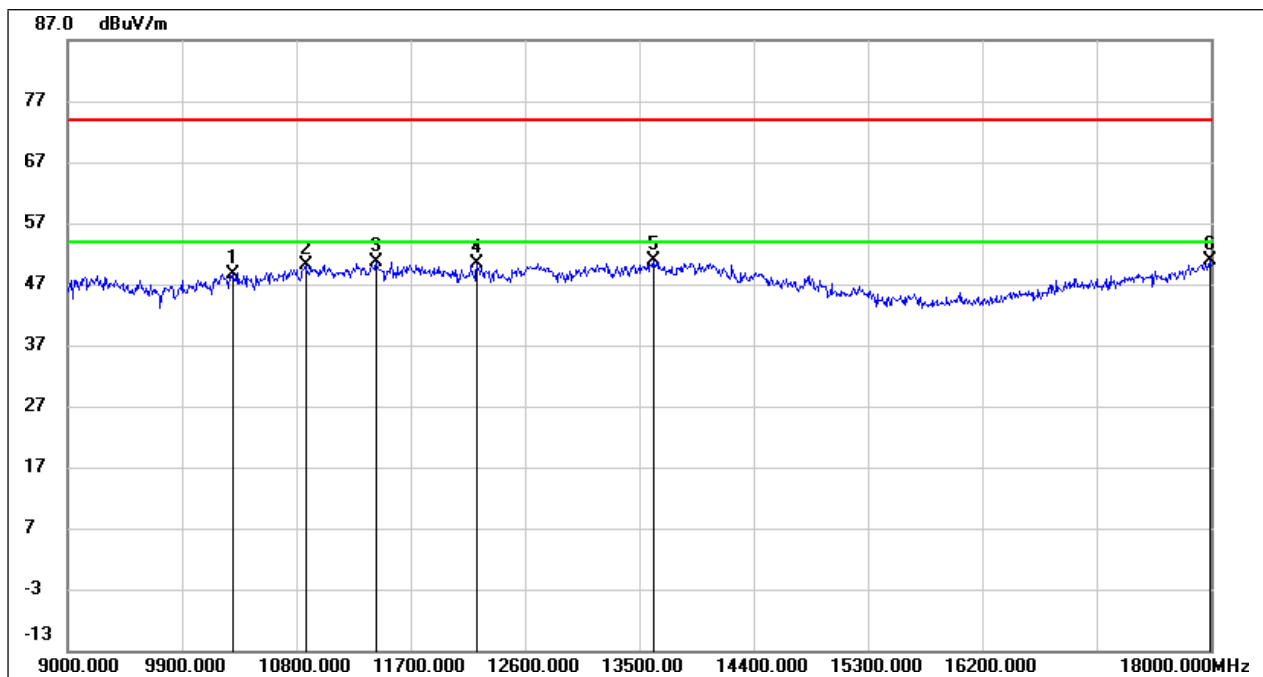


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	35.92	12.69	48.61	74.00	-25.39	peak
2	10872.000	35.79	14.33	50.12	74.00	-23.88	peak
3	11430.000	34.29	16.28	50.57	74.00	-23.43	peak
4	12222.000	32.68	17.74	50.42	74.00	-23.58	peak
5	13608.000	29.86	21.05	50.91	74.00	-23.09	peak
6	17991.000	25.87	25.11	50.98	74.00	-23.02	peak

Test Mode:	802.11a 20	Frequency(MHz):	6135
Polarity:	Horizontal	Test Voltage:	DC 5V

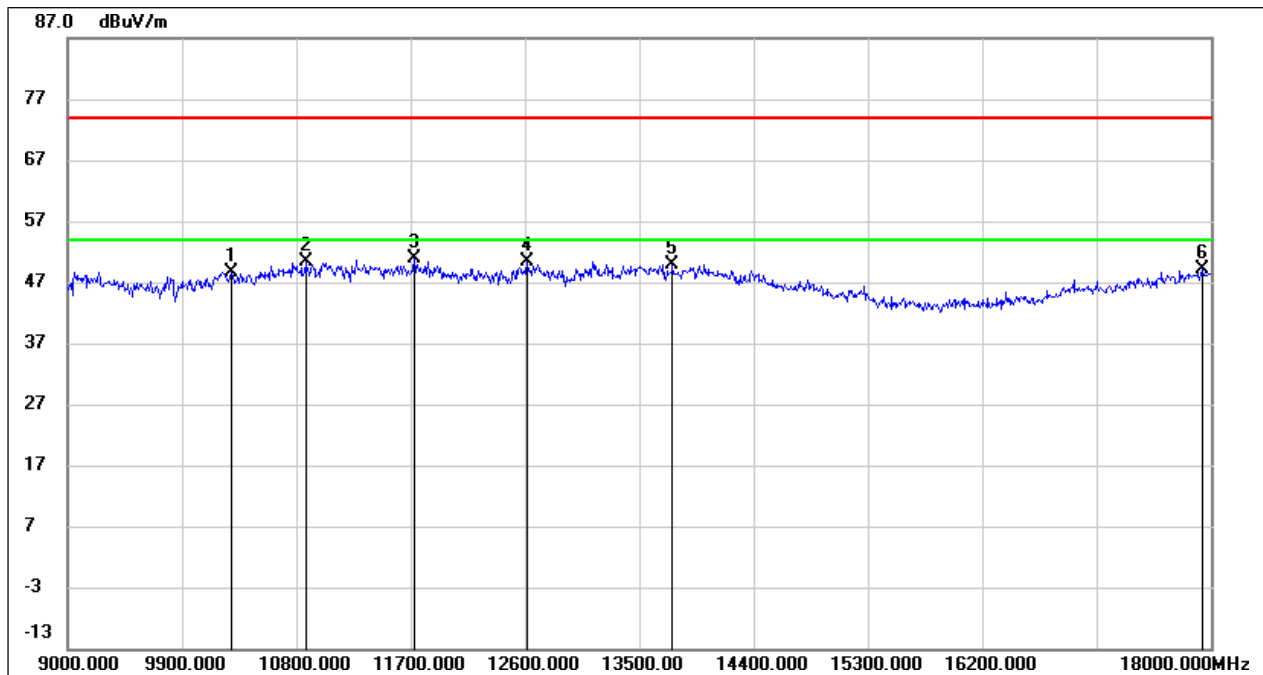


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10287.000	36.00	12.68	48.68	74.00	-25.32	peak
2	10872.000	35.99	14.33	50.32	74.00	-23.68	peak
3	11727.000	33.71	17.16	50.87	74.00	-23.13	peak
4	12618.000	32.52	17.84	50.36	74.00	-23.64	peak
5	13761.000	28.56	21.37	49.93	74.00	-24.07	peak
6	17937.000	24.26	24.76	49.02	74.00	-24.98	peak

Test Mode:	802.11a 20	Frequency(MHz):	6135
Polarity:	Vertical	Test Voltage:	DC 5V

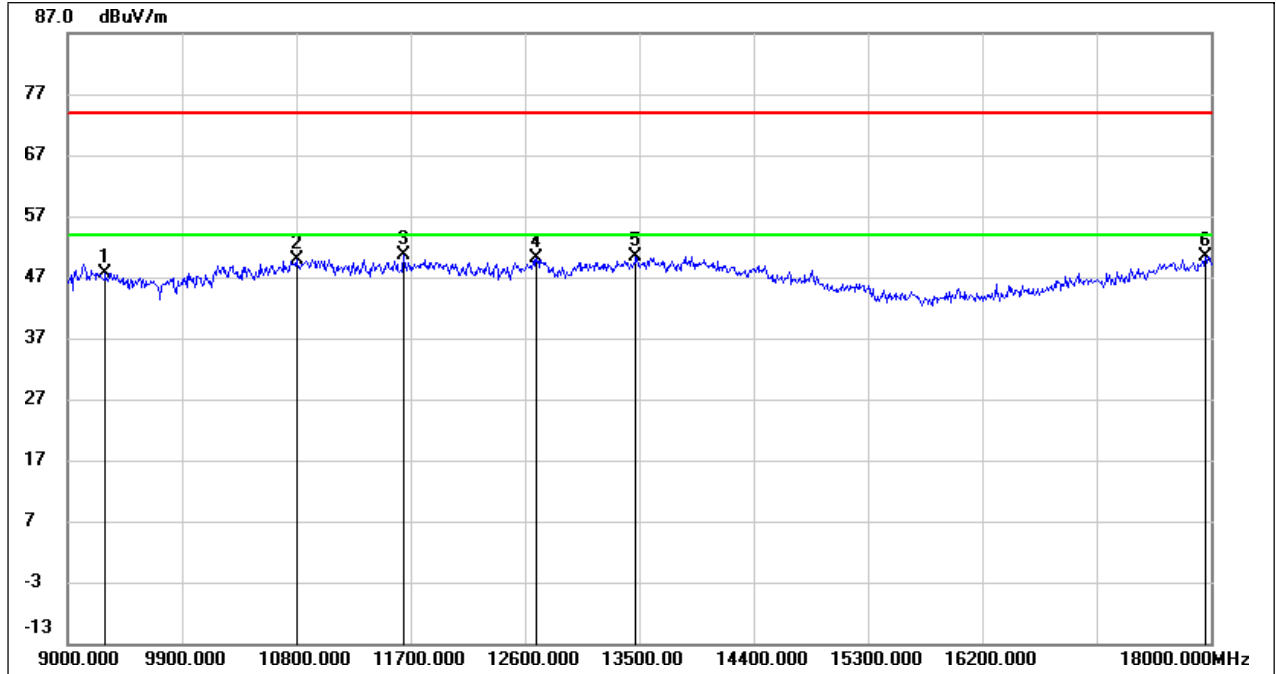


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9297.000	36.78	10.87	47.65	74.00	-26.35	peak
2	10800.000	35.75	14.10	49.85	74.00	-24.15	peak
3	11646.000	33.64	16.94	50.58	74.00	-23.42	peak
4	12690.000	32.16	18.05	50.21	74.00	-23.79	peak
5	13473.000	29.68	20.70	50.38	74.00	-23.62	peak
6	17955.000	25.61	24.87	50.48	74.00	-23.52	peak

Test Mode:	802.11a 20	Frequency(MHz):	6375
Polarity:	Horizontal	Test Voltage:	DC 5V

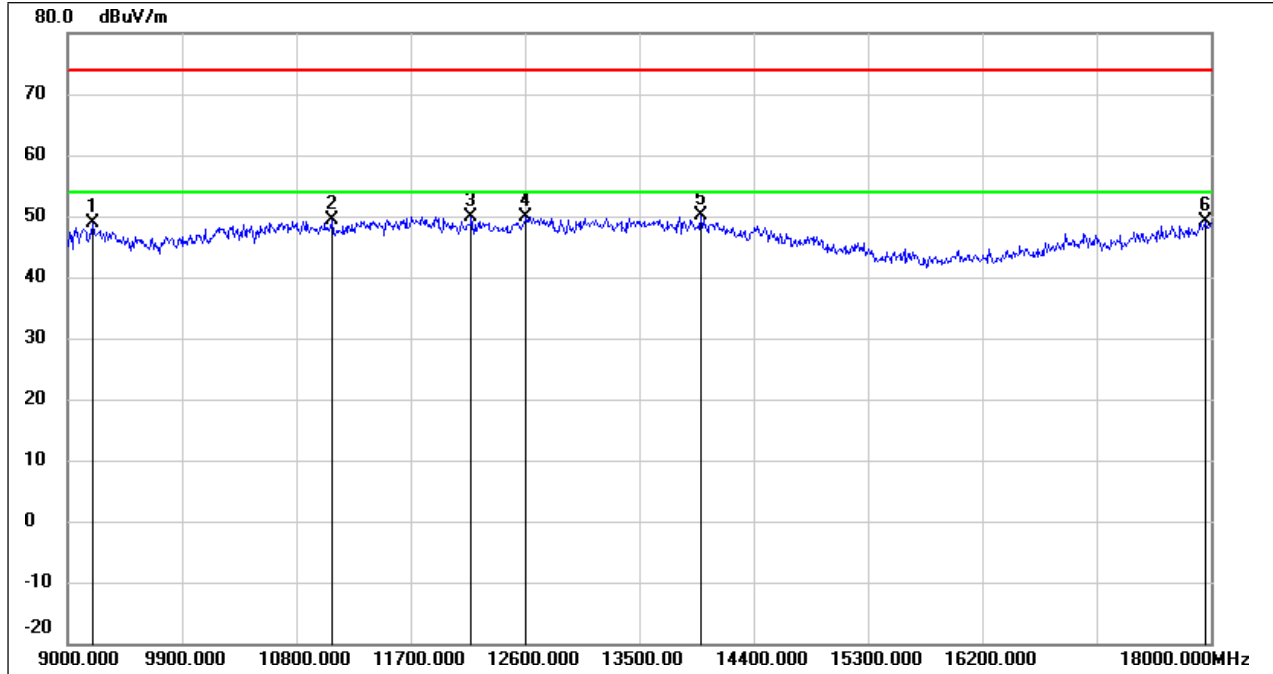


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9198.000	37.92	10.85	48.77	74.00	-25.23	peak
2	11079.000	34.35	15.03	49.38	74.00	-24.62	peak
3	12177.000	32.17	17.77	49.94	74.00	-24.06	peak
4	12609.000	32.09	17.83	49.92	74.00	-24.08	peak
5	13986.000	28.31	21.85	50.16	74.00	-23.84	peak
6	17955.000	24.20	24.87	49.07	74.00	-24.93	peak

Test Mode:	802.11a 20	Frequency(MHz):	6375
Polarity:	Vertical	Test Voltage:	DC 5V

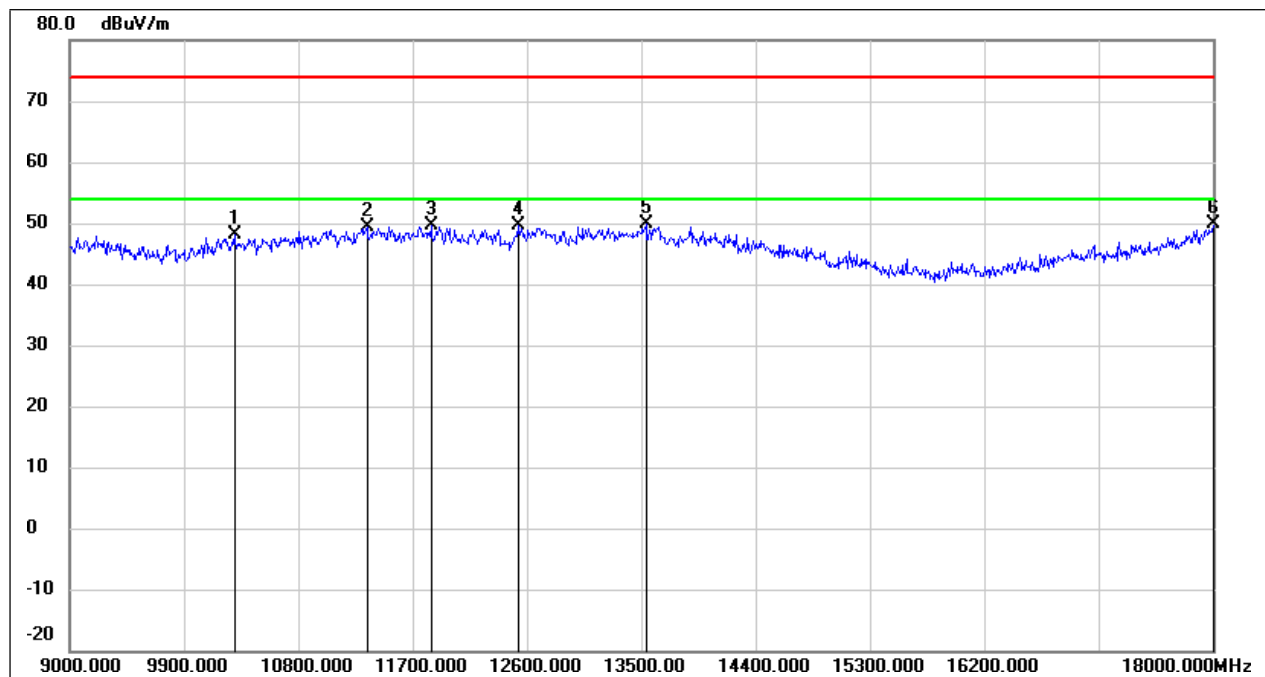


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	35.54	12.69	48.23	74.00	-25.77	peak
2	11340.000	33.46	15.96	49.42	74.00	-24.58	peak
3	11844.000	32.24	17.48	49.72	74.00	-24.28	peak
4	12528.000	32.09	17.60	49.69	74.00	-24.31	peak
5	13536.000	28.98	20.90	49.88	74.00	-24.12	peak
6	18000.000	24.67	25.16	49.83	74.00	-24.17	peak

Test Mode:	802.11a 20	Frequency(MHz):	6455
Polarity:	Horizontal	Test Voltage:	DC 5V

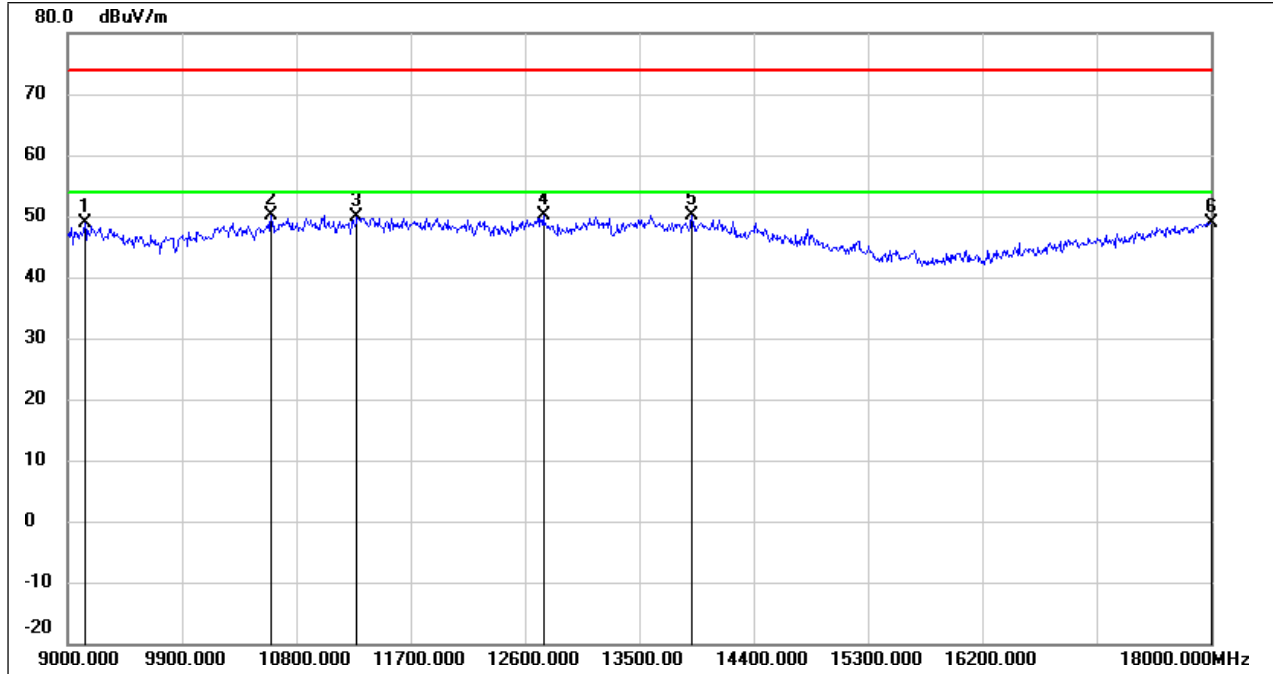


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9135.000	38.07	10.84	48.91	74.00	-25.09	peak
2	10602.000	36.59	13.45	50.04	74.00	-23.96	peak
3	11277.000	34.10	15.73	49.83	74.00	-24.17	peak
4	12744.000	31.85	18.19	50.04	74.00	-23.96	peak
5	13914.000	28.49	21.69	50.18	74.00	-23.82	peak
6	18000.000	23.83	25.16	48.99	74.00	-25.01	peak

Test Mode:	802.11a 20	Frequency(MHz):	6455
Polarity:	Vertical	Test Voltage:	DC 5V

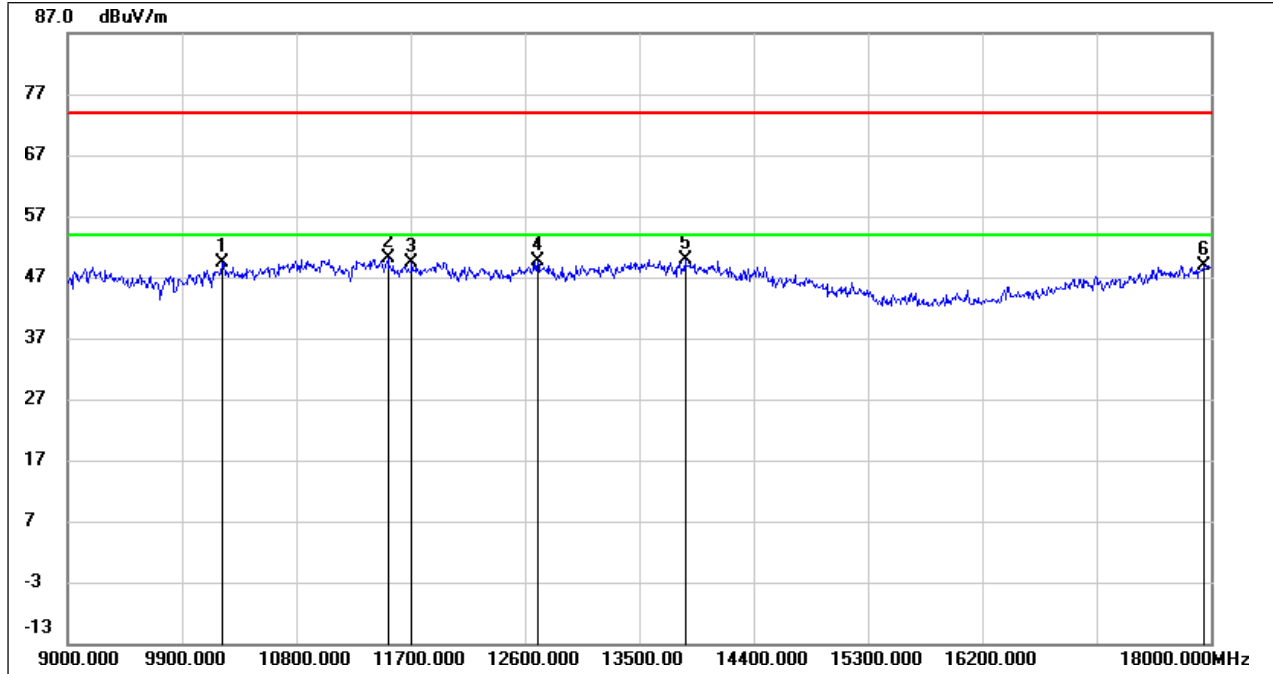


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10215.000	36.95	12.52	49.47	74.00	-24.53	peak
2	11520.000	33.60	16.59	50.19	74.00	-23.81	peak
3	11709.000	32.31	17.11	49.42	74.00	-24.58	peak
4	12699.000	31.61	18.07	49.68	74.00	-24.32	peak
5	13860.000	28.37	21.59	49.96	74.00	-24.04	peak
6	17946.000	24.14	24.82	48.96	74.00	-25.04	peak

Test Mode:	802.11a 20	Frequency(MHz):	6535
Polarity:	Horizontal	Test Voltage:	DC 5V

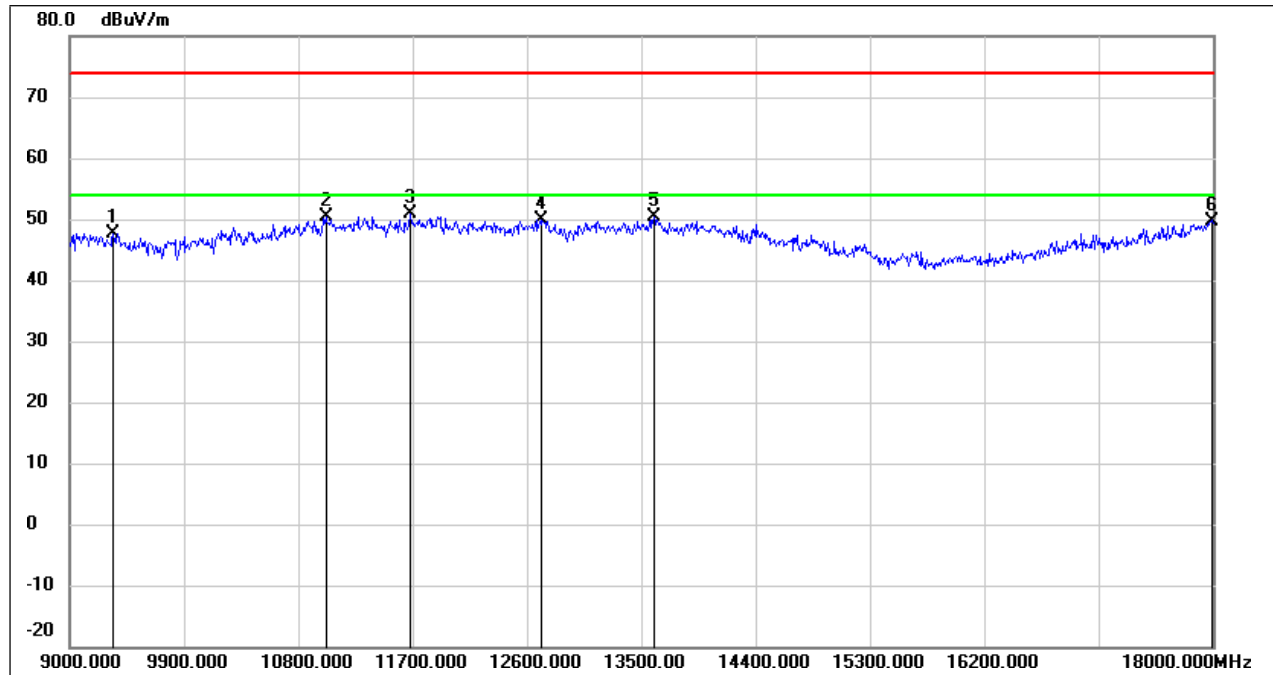


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9342.000	36.86	10.87	47.73	74.00	-26.27	peak
2	11016.000	35.46	14.81	50.27	74.00	-23.73	peak
3	11682.000	33.72	17.04	50.76	74.00	-23.24	peak
4	12708.000	31.85	18.10	49.95	74.00	-24.05	peak
5	13599.000	29.38	21.02	50.40	74.00	-23.60	peak
6	17991.000	24.64	25.11	49.75	74.00	-24.25	peak

Test Mode:	802.11a 20	Frequency(MHz):	6535
Polarity:	Vertical	Test Voltage:	DC 5V

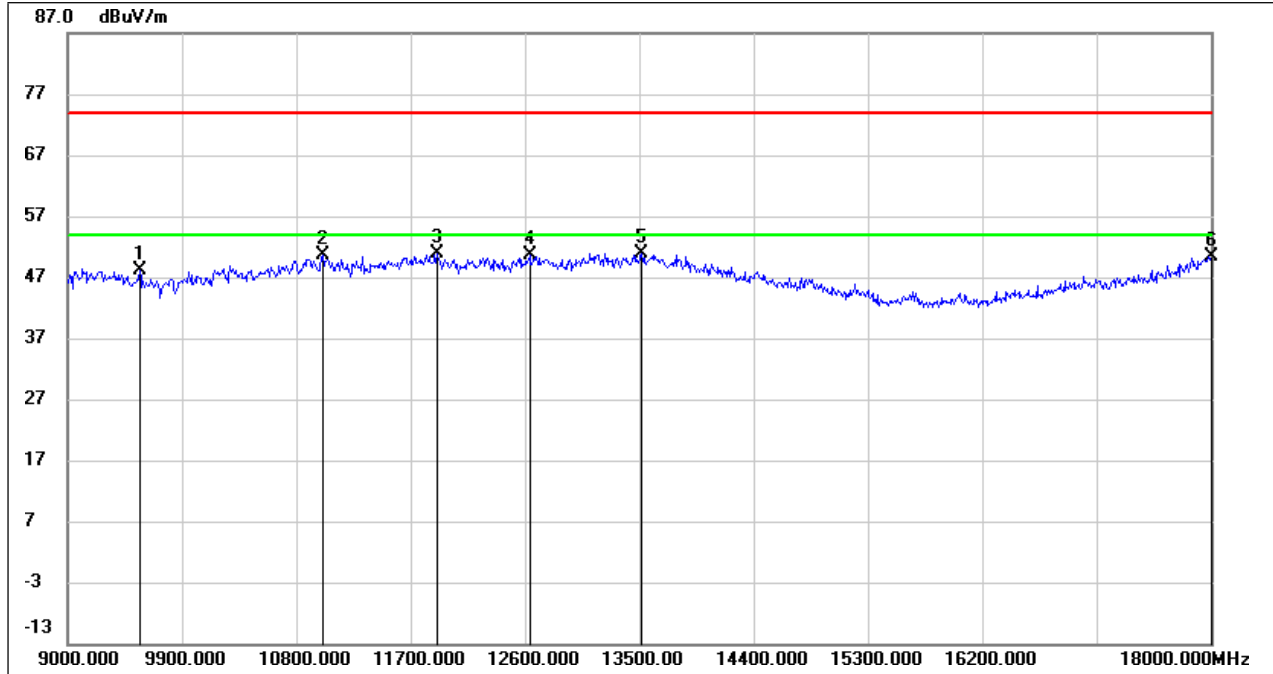


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9567.000	37.18	11.06	48.24	74.00	-25.76	peak
2	11007.000	35.81	14.77	50.58	74.00	-23.42	peak
3	11907.000	33.19	17.66	50.85	74.00	-23.15	peak
4	12636.000	32.72	17.90	50.62	74.00	-23.38	peak
5	13518.000	30.13	20.85	50.98	74.00	-23.02	peak
6	18000.000	25.25	25.16	50.41	74.00	-23.59	peak

Test Mode:	802.11a 20	Frequency(MHz):	6695
Polarity:	Horizontal	Test Voltage:	DC 5V

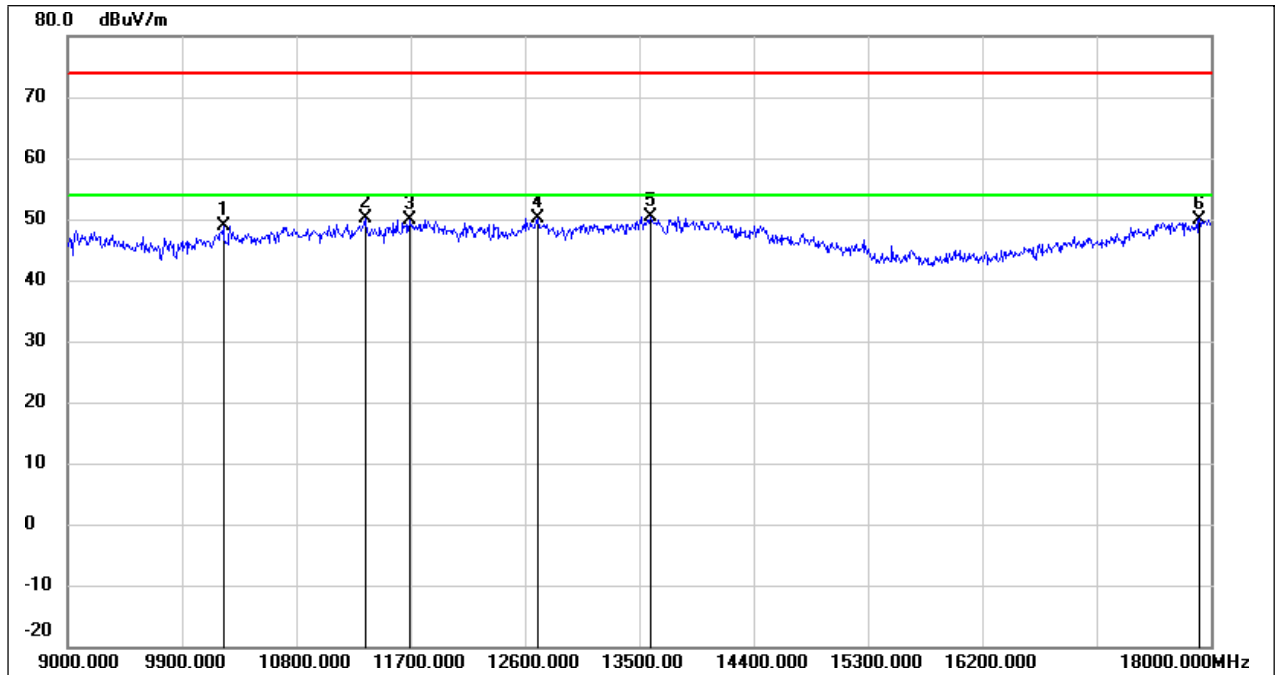


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10224.000	36.31	12.55	48.86	74.00	-25.14	peak
2	11340.000	34.08	15.96	50.04	74.00	-23.96	peak
3	11691.000	32.78	17.05	49.83	74.00	-24.17	peak
4	12699.000	32.05	18.07	50.12	74.00	-23.88	peak
5	13590.000	29.34	21.00	50.34	74.00	-23.66	peak
6	17910.000	25.41	24.59	50.00	74.00	-24.00	peak

Test Mode:	802.11a 20	Frequency(MHz):	6695
Polarity:	Vertical	Test Voltage:	DC 5V

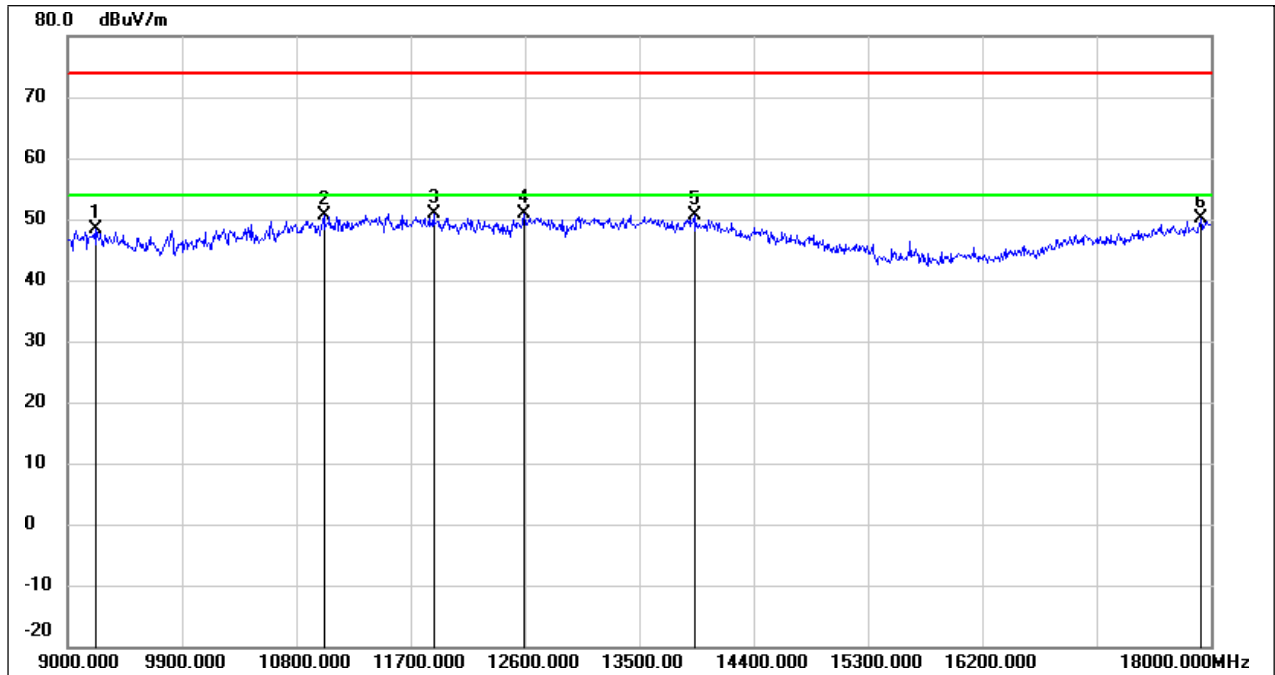


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9225.000	37.54	10.85	48.39	74.00	-25.61	peak
2	11016.000	35.71	14.81	50.52	74.00	-23.48	peak
3	11880.000	33.28	17.58	50.86	74.00	-23.14	peak
4	12591.000	33.10	17.78	50.88	74.00	-23.12	peak
5	13932.000	28.88	21.74	50.62	74.00	-23.38	peak
6	17919.000	25.55	24.64	50.19	74.00	-23.81	peak

Test Mode:	802.11a 20	Frequency(MHz):	6855
Polarity:	Horizontal	Test Voltage:	DC 5V

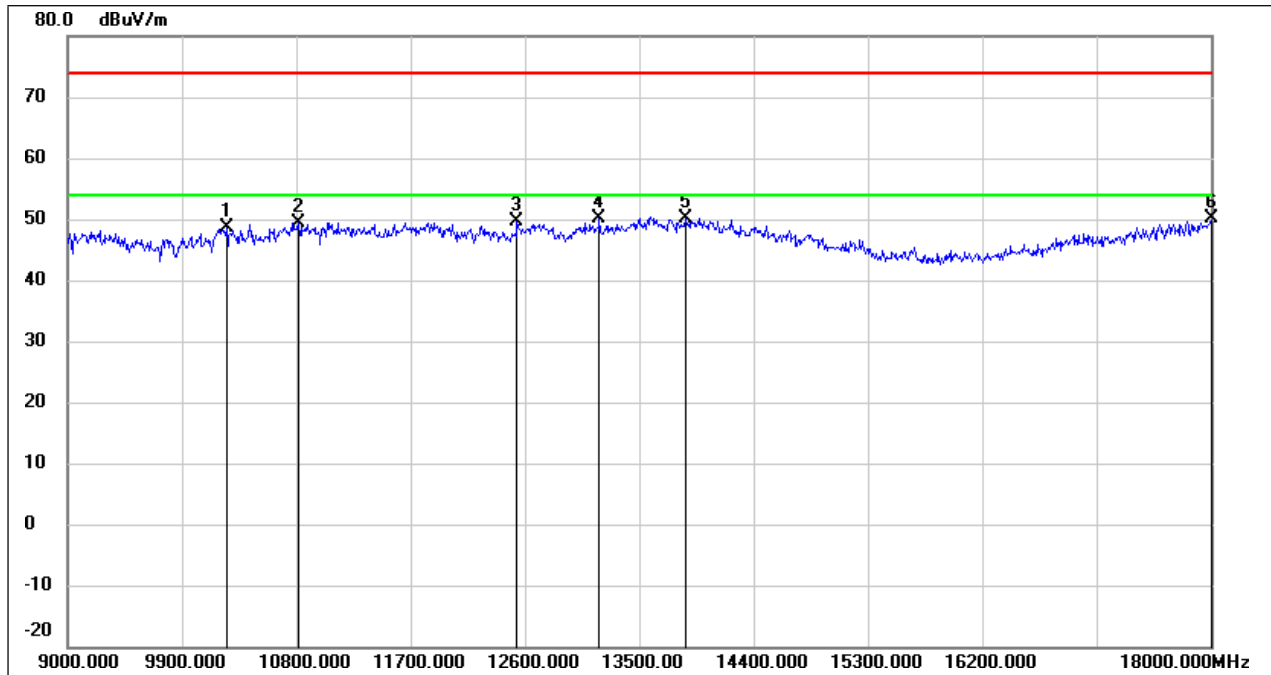


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10251.000	35.93	12.61	48.54	74.00	-25.46	peak
2	10818.000	35.32	14.17	49.49	74.00	-24.51	peak
3	12537.000	31.88	17.63	49.51	74.00	-24.49	peak
4	13185.000	30.44	19.60	50.04	74.00	-23.96	peak
5	13860.000	28.62	21.59	50.21	74.00	-23.79	peak
6	18000.000	25.07	25.16	50.23	74.00	-23.77	peak

Test Mode:	802.11a 20	Frequency(MHz):	6855
Polarity:	Vertical	Test Voltage:	DC 5V

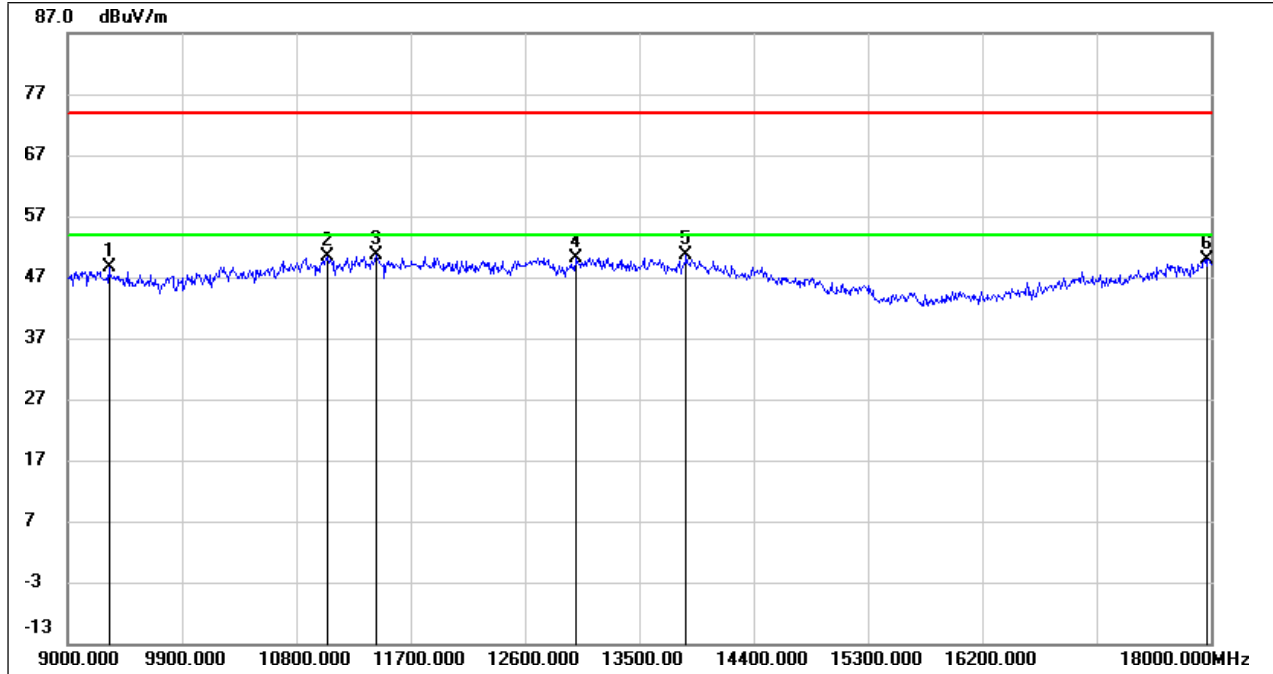


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9324.000	37.68	10.86	48.54	74.00	-25.46	peak
2	11043.000	35.36	14.90	50.26	74.00	-23.74	peak
3	11430.000	34.25	16.28	50.53	74.00	-23.47	peak
4	13005.000	31.33	18.91	50.24	74.00	-23.76	peak
5	13869.000	29.04	21.59	50.63	74.00	-23.37	peak
6	17973.000	24.91	24.99	49.90	74.00	-24.10	peak

Test Mode:	802.11a 20	Frequency(MHz):	6935
Polarity:	Horizontal	Test Voltage:	DC 5V

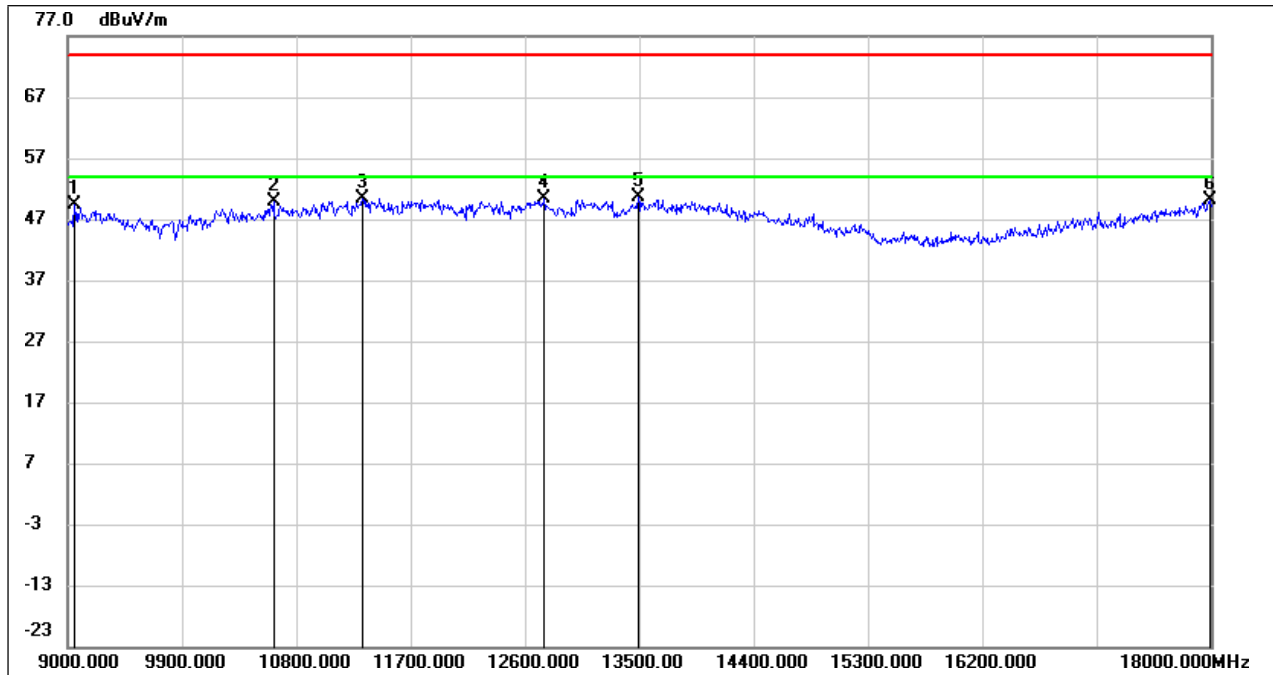


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9054.000	38.44	10.82	49.26	74.00	-24.74	peak
2	10620.000	36.37	13.52	49.89	74.00	-24.11	peak
3	11322.000	34.47	15.90	50.37	74.00	-23.63	peak
4	12753.000	32.06	18.21	50.27	74.00	-23.73	peak
5	13491.000	29.93	20.77	50.70	74.00	-23.30	peak
6	17991.000	24.91	25.11	50.02	74.00	-23.98	peak

Test Mode:	802.11a 20	Frequency(MHz):	6935
Polarity:	Vertical	Test Voltage:	DC 5V

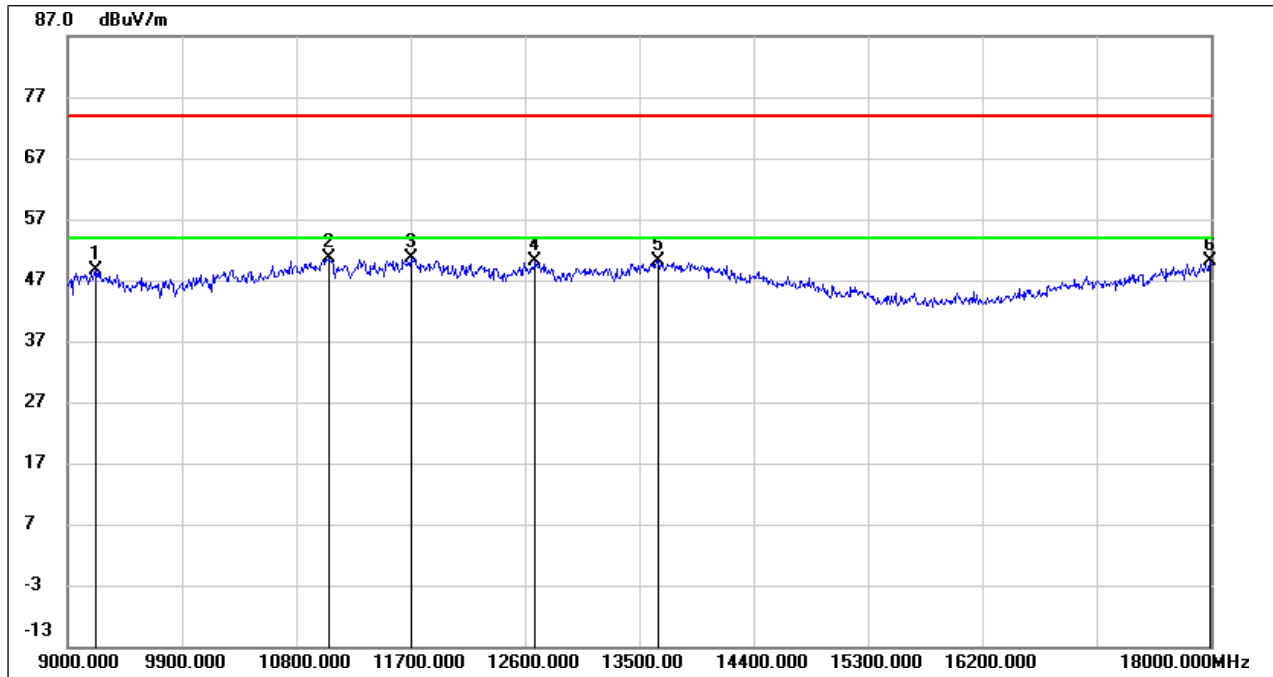


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9216.000	37.70	10.85	48.55	74.00	-25.45	peak
2	11061.000	35.55	14.96	50.51	74.00	-23.49	peak
3	11700.000	33.56	17.08	50.64	74.00	-23.36	peak
4	12681.000	32.17	18.03	50.20	74.00	-23.80	peak
5	13653.000	29.07	21.14	50.21	74.00	-23.79	peak
6	17991.000	25.05	25.11	50.16	74.00	-23.84	peak

Test Mode:	802.11a 20	Frequency(MHz):	7015
Polarity:	Horizontal	Test Voltage:	DC 5V

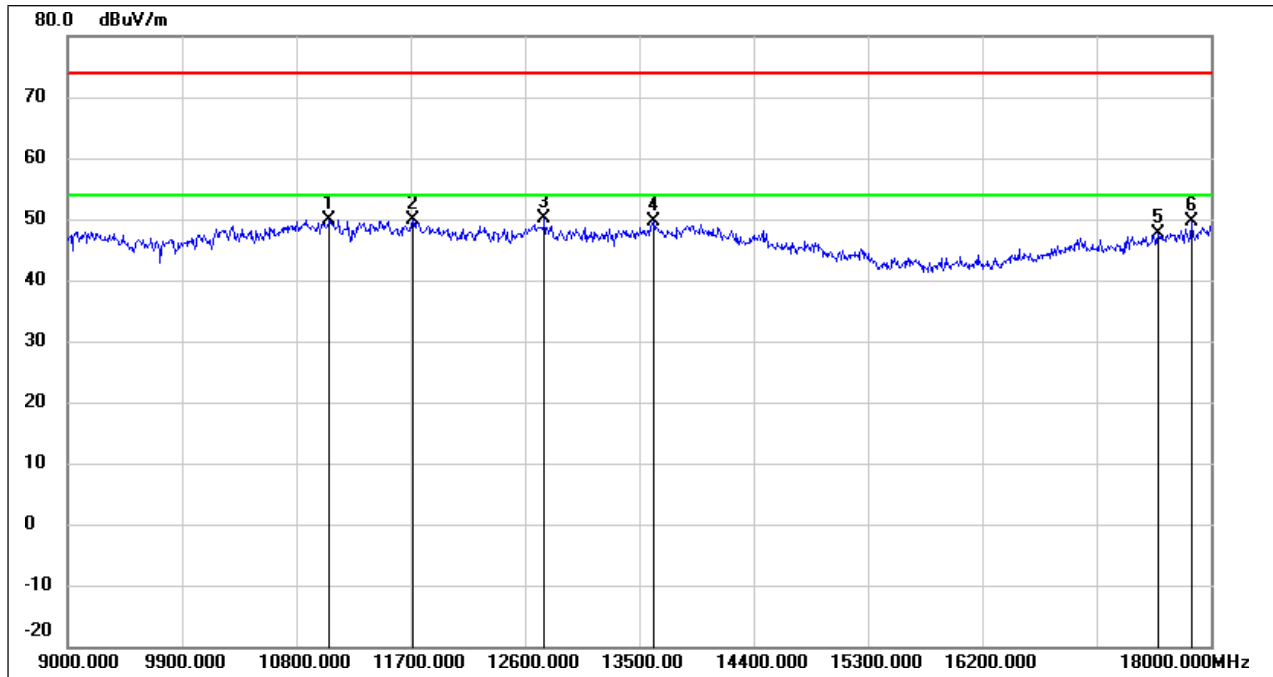


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11061.000	34.86	14.96	49.82	74.00	-24.18	peak
2	11718.000	32.86	17.13	49.99	74.00	-24.01	peak
3	12753.000	31.85	18.21	50.06	74.00	-23.94	peak
4	13617.000	28.46	21.06	49.52	74.00	-24.48	peak
5	17586.000	25.08	22.51	47.59	74.00	-26.41	peak
6	17847.000	25.43	24.18	49.61	74.00	-24.39	peak

Test Mode:	802.11a 20	Frequency(MHz):	7015
Polarity:	Vertical	Test Voltage:	DC 5V

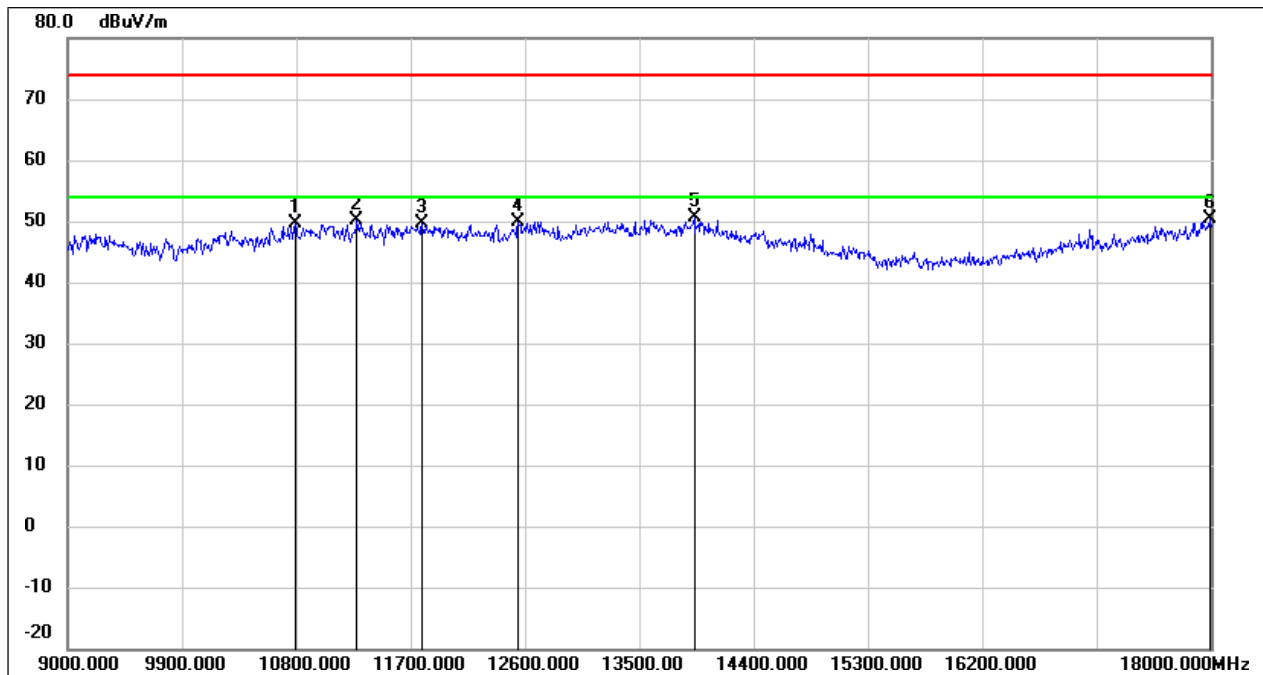


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10791.000	35.65	14.07	49.72	74.00	-24.28	peak
2	11277.000	34.28	15.73	50.01	74.00	-23.99	peak
3	11790.000	32.37	17.33	49.70	74.00	-24.30	peak
4	12546.000	32.32	17.66	49.98	74.00	-24.02	peak
5	13932.000	28.78	21.74	50.52	74.00	-23.48	peak
6	17991.000	25.25	25.11	50.36	74.00	-23.64	peak

Test Mode:	802.11a 20	Frequency(MHz):	7095
Polarity:	Horizontal	Test Voltage:	DC 5V

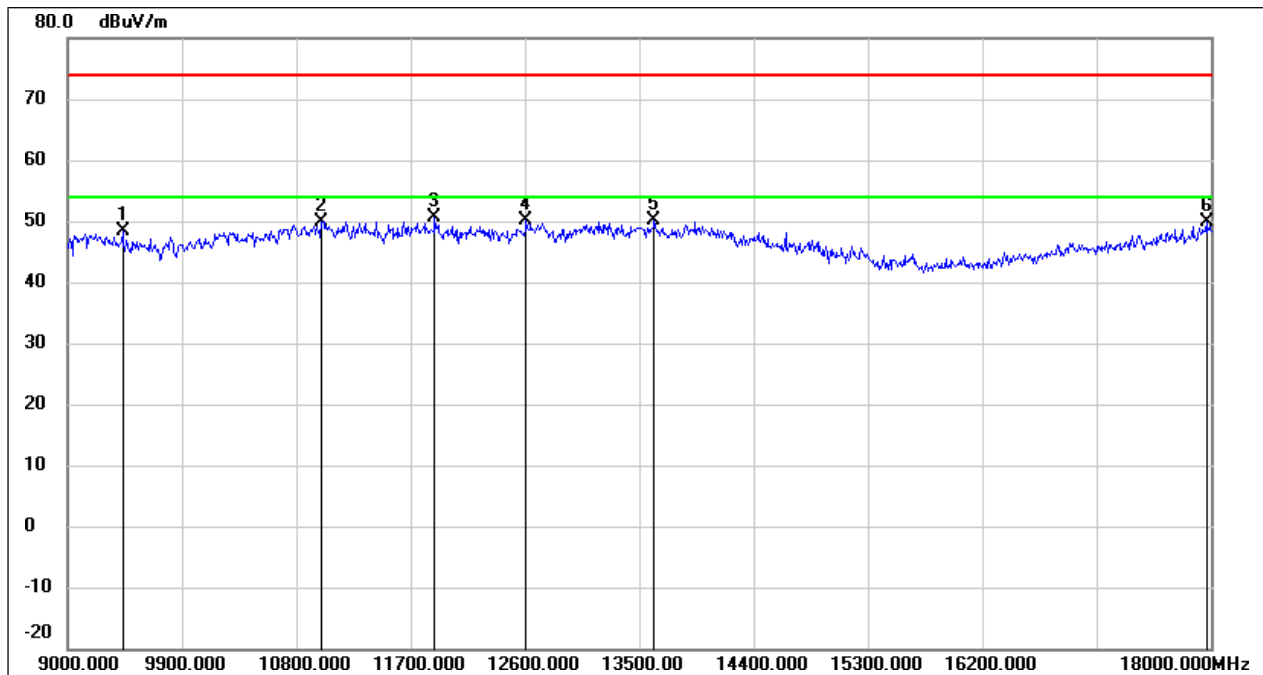


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9432.000	37.46	10.88	48.34	74.00	-25.66	peak
2	10998.000	35.17	14.75	49.92	74.00	-24.08	peak
3	11889.000	33.00	17.60	50.60	74.00	-23.40	peak
4	12609.000	32.39	17.83	50.22	74.00	-23.78	peak
5	13617.000	29.02	21.06	50.08	74.00	-23.92	peak
6	17964.000	25.00	24.92	49.92	74.00	-24.08	peak

Test Mode:	802.11a 20	Frequency(MHz):	7095
Polarity:	Vertical	Test Voltage:	DC 5V

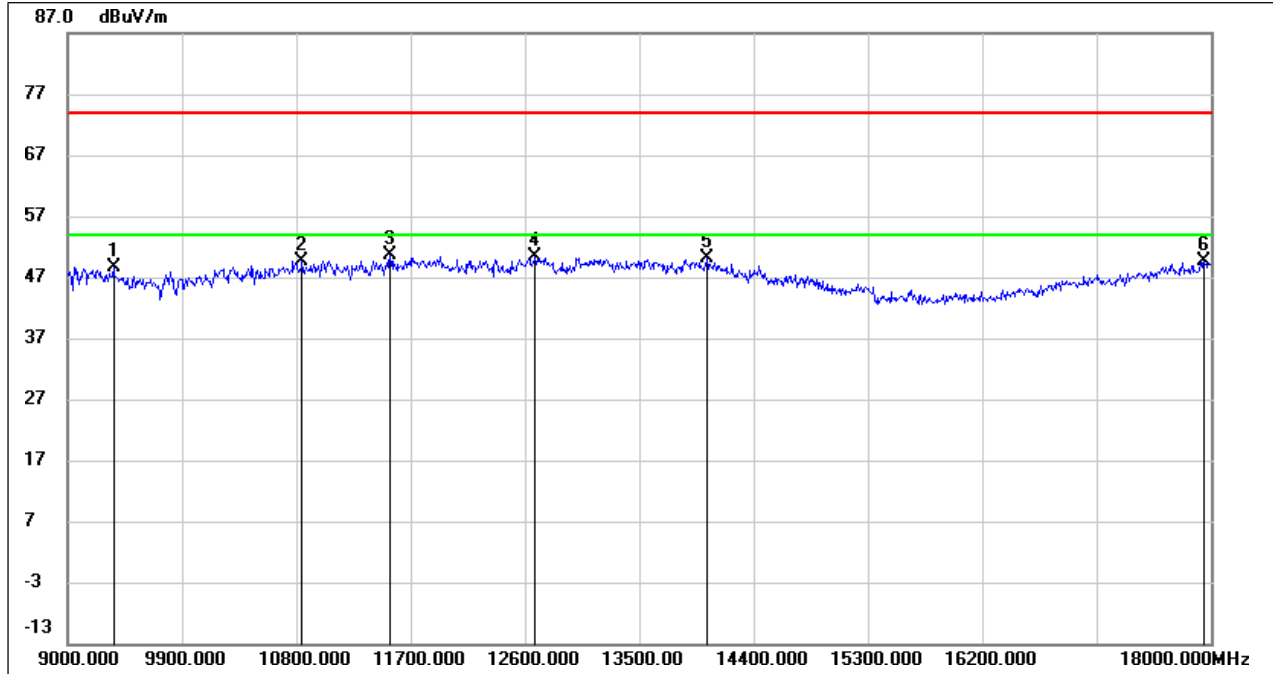


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9360.000	37.65	10.87	48.52	74.00	-25.48	peak
2	10845.000	35.48	14.24	49.72	74.00	-24.28	peak
3	11538.000	34.03	16.63	50.66	74.00	-23.34	peak
4	12681.000	32.34	18.03	50.37	74.00	-23.63	peak
5	14031.000	28.35	21.74	50.09	74.00	-23.91	peak
6	17946.000	24.81	24.82	49.63	74.00	-24.37	peak

Test Mode:	802.11ax HE 20 (26Tone Ru0)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

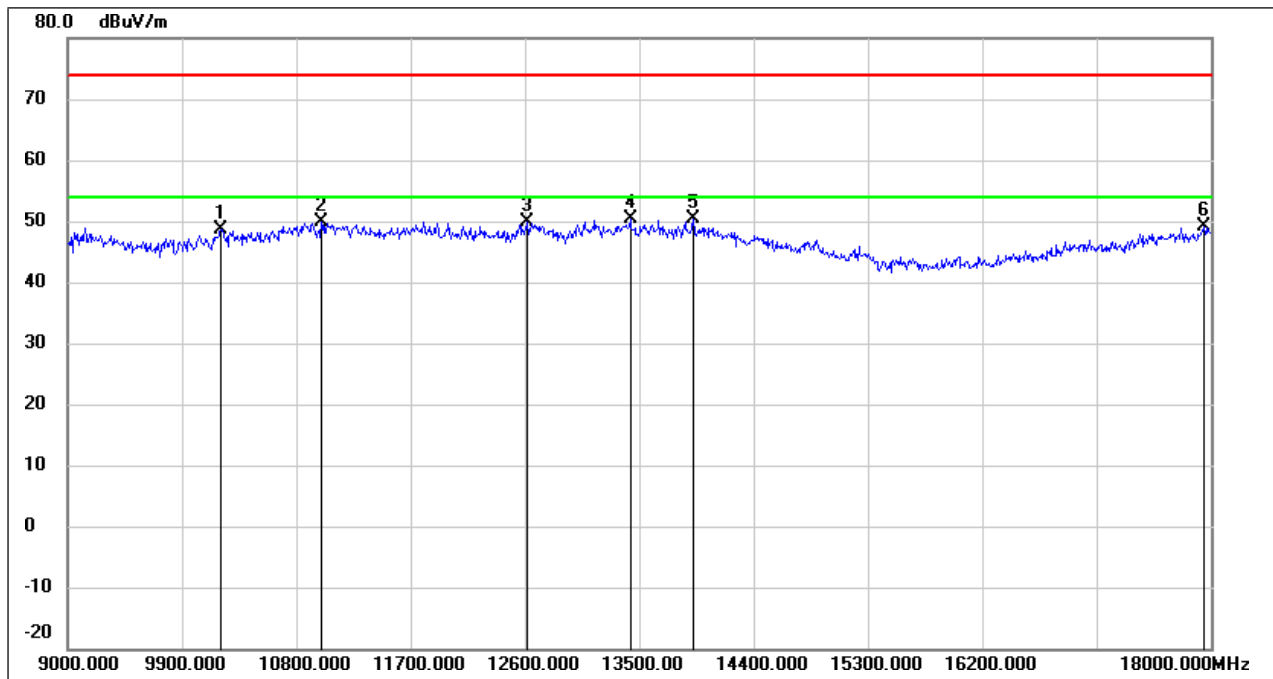


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10206.000	36.08	12.51	48.59	74.00	-25.41	peak
2	10998.000	35.04	14.75	49.79	74.00	-24.21	peak
3	12618.000	32.15	17.84	49.99	74.00	-24.01	peak
4	13428.000	29.76	20.53	50.29	74.00	-23.71	peak
5	13923.000	28.68	21.72	50.40	74.00	-23.60	peak
6	17946.000	24.26	24.82	49.08	74.00	-24.92	peak

Test Mode:	802.11ax HE 20 (26Tone Ru0)	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 5V

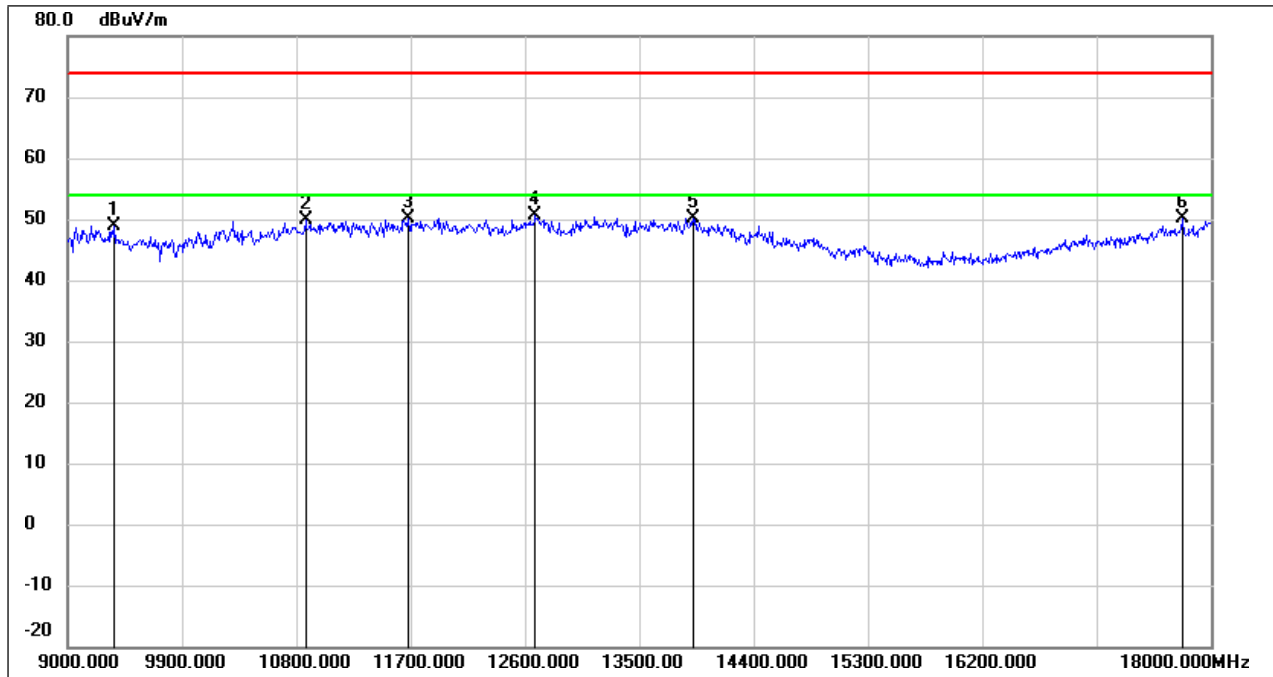

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9369.000	38.09	10.87	48.96	74.00	-25.04	peak
2	10872.000	35.48	14.33	49.81	74.00	-24.19	peak
3	11682.000	33.00	17.04	50.04	74.00	-23.96	peak
4	12681.000	32.66	18.03	50.69	74.00	-23.31	peak
5	13923.000	28.35	21.72	50.07	74.00	-23.93	peak
6	17775.000	26.36	23.72	50.08	74.00	-23.92	peak

Test Mode:	802.11ax HE 20 (52Tone Ru37)	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

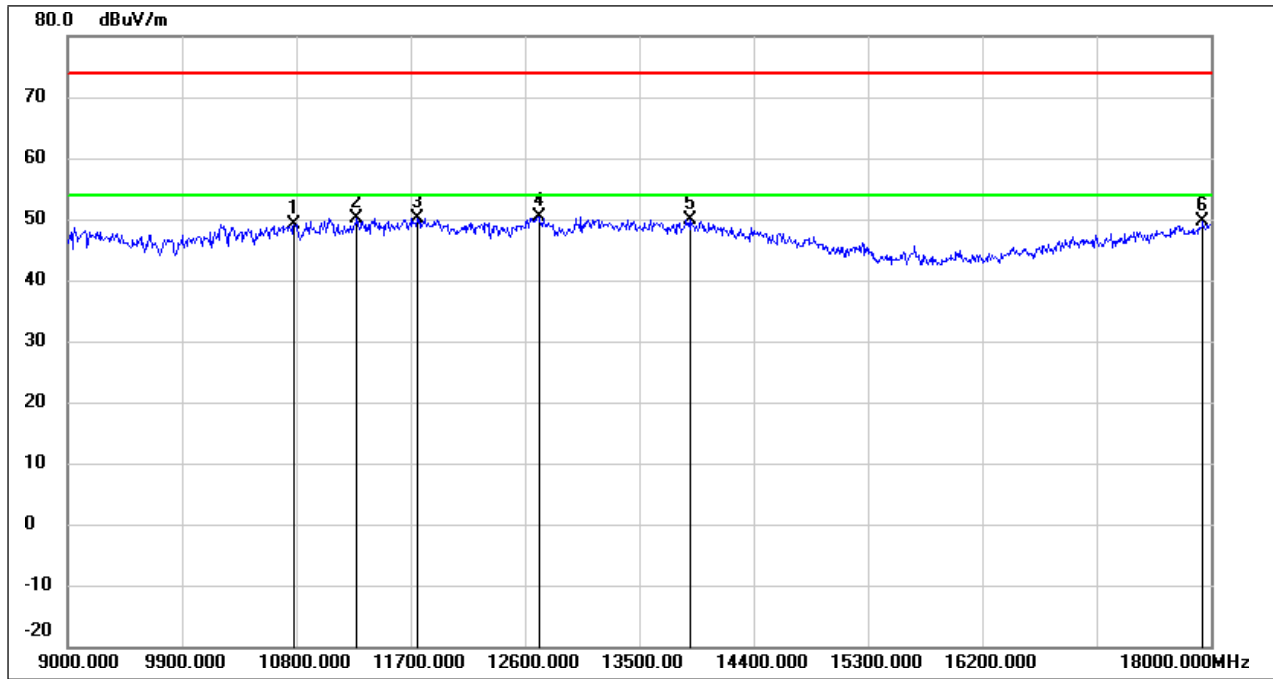

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10782.000	35.07	14.03	49.10	74.00	-24.90	peak
2	11277.000	34.50	15.73	50.23	74.00	-23.77	peak
3	11754.000	33.02	17.23	50.25	74.00	-23.75	peak
4	12708.000	32.28	18.10	50.38	74.00	-23.62	peak
5	13896.000	28.32	21.65	49.97	74.00	-24.03	peak
6	17937.000	24.94	24.76	49.70	74.00	-24.30	peak