

FCC PART 15 SUBPART C TEST REPORT


FCC PART 15 SUBPART E 15.407

Report Reference No......: **MTWC21120955-R1**

FCC ID..... : **A4C-10016A**

Compiled by

(position+printed name+signature)..: File administrators Alisa Luo




Supervised by

(position+printed name+signature)..: Test Engineer Sunny Deng



Approved by

(position+printed name+signature)..: Manager Yvette Zhou



Date of issue.....: January 13,2022

Representative Laboratory Name ..: **Shenzhen Most Technology Service Co., Ltd.**

Address: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,
Nanshan, Shenzhen, Guangdong, China.

Applicant's name.....: **RM Acquisition LLC.**

Address: 8770 West Bryn Mawr Avenue, Chicago, IL 60631

Test specification

Standard: **FCC Part 15 Subpart E 15.407**

Shenzhen Most Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description

Trade Mark: **RAND McNALLY**

Manufacturer.....: **SHEN ZHEN APICAL TECHNOLOGY CO., LTD**

Model/Type reference.....: TND T1050

Listed Models: N/A

Ratings: DC3.7V by Battery
DC 5V(by Car Charger)

Modulation: OFDM

Frequency.....: From 5180MHz-5240MHz; 5260MHz-5320MHz;
5500MHz-5700MHz; 5745MHz-5825MHz

Hardware version: TND T1050-MT8176-MAIN-01B

Software version: O11019. TND 1050 -P1-220110-110

Result.....: **PASS**

TEST REPORT

Equipment under Test : GPS Device

Model /Type : TND T1050

Listed Models : **N/A**

Applicant : RM Acquisition LLC.

Address : 8770 West Bryn Mawr Avenue, Chicago, IL 60631

Manufacturer : SHEN ZHEN APICAL TECHNOLOGY CO., LTD

Address : 9/F,B Building, Tinghua Unis Infoport, Langshan RD, North district, Hi-tech Industrial Park, Nanshan, Shenzhen

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>REVISION HISTORY</u>	<u>4</u>
<u>2</u>	<u>TEST STANDARDS</u>	<u>5</u>
<u>3</u>	<u>SUMMARY</u>	<u>6</u>
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	7
3.6	Block Diagram of Test Setup	7
3.1	Test Item (Equipment Under Test) Description*	7
3.2	Auxiliary Equipment (AE) Description	8
3.3	Antenna Information*	8
3.4	Related Submittal(s) / Grant (s)	8
3.5	Modifications	8
<u>4</u>	<u>TEST ENVIRONMENT</u>	<u>9</u>
4.1	Address of the test laboratory	9
4.2	Test Facility	9
4.3	Environmental conditions	9
4.4	Test Description	10
4.5	Statement of the measurement uncertainty	10
4.6	Equipments Used during the Test	11
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	AC Power Conducted Emission	12
5.2	Radiated Emissions	13
5.3	Conduction spurious emission	24
5.4	Maximum Conducted Average Output Power	46
5.5	Power Spectral Density	49
5.6	Emission Bandwidth (26dBm Bandwidth)	63
5.7	Minimum Emission Bandwidth (6dBm Bandwidth)	74
5.8	Frequency Stability	78
5.9	Duty Cycle Information	81
<u>6</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>85</u>
<u>7</u>	<u>PHOTOS OF THE EUT</u>	<u>86</u>

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2022-01-13	Initial Issue	Alisa Luo

2 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v01r02

3 SUMMARY

3.1 General Remarks

Date of receipt of test sample	:	2021.12.23
Testing commenced on	:	2021.12.24
Testing concluded on	:	2022.01.13

3.2 Product Description

Product Description:	GPS Device			
Model:	TND T1050			
Power supply:	DC3.7V by Battery DC 5V(by Car Charger)			
Testing sample ID:	MT21120200			
WIFI				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5180MHz-5240MHz 5260MHz-5320MHz 5500MHz-5700MHz 5745MHz-5825MHz	5190MHz-5230MHz 5270-5310 5510-5670 5755MHz-5795MHz	5210MHz 5290MHz 5530MHz-5610MHz 5775MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Antenna type:	PCB antenna			
Antenna gain:	5180MHz-5240MHz:2.40dBi, 5260MHz-5320MHz:2.40dBi, 5500MHz-5700MHz:2.40dBi, 5745MHz-5825MHz:2.40dBi			

3.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC3.7V by Battery
DC 5V(by Car Charger)

3.4 Short description of the Equipment under Test (EUT)

This is a GPS Device

For more details, refer to the user's manual of the EUT.

3.5 EUT operation mode


The Applicant provides communication tools software (AT command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220				
	48	5240				
U-NII 2A	52	5260	54	5270	58	5290
	56	5280				
	60	5300				
	64	5320				
U-NII 2C	100	5500	102	5510	106	5530
	104	5520				
	108	5540				
	112	5560				
	116	5580	118	5590		
	120	5600				
	124	5620				
	128	5640				
	132	5660	134	5670	--	--
	140	5700			--	--
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785				
	161	5805				
	165	5825	--	--		

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

3.6 Block Diagram of Test Setup

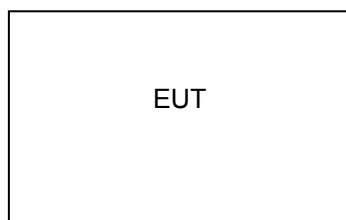

3.1 Test Item (Equipment Under Test) Description*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

*: declared by the applicant. According to customers information EUTs A and B are the same devices.

3.2 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	-			
AE 2	-			

3.3 Antenna Information*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	5180MHz-5240MHz 5260MHz-5320MHz 5500MHz-5700MHz 5745MHz-5825MHz	---	2.4dBi
Antenna 2					

*: declared by the applicant.

3.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

3.5 Modifications

No modifications were implemented to meet testing criteria.

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 0031192610

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

4.3 Environmental conditions

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

4.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS _{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS _{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A _{Note 3}
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	54 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	MCS0
	11n(40MHz),11ac(40MHz)/OFDM	MCS0
	11ac(80MHz)/OFDM	MCS0

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 Db	(1)
Radiated Emission	1~18GHz	4.32 Db	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.6 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	2021/04/19	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	2021/04/19	1 Year
3.	Receiver	R&S	ESCI	100492	2021/04/7	1 Year
4	Receiver	R&S	ESPI	101202	2021/04/7	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	2021/04/7	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	2021/03/14	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	2021/04/7	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	2021/04/16	1 Year
9	Horn antenna	R&S	OBH100400	26999002	2021/04/16	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	2021/04/15	1 Year
11	Spectrum analyzer	R&S	FSP	100019	2021/04/15	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	2021/03/14	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	2021/03/14	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	2021/03/14	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	2021/03/14	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	2021/03/14	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	2021/03/14	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	2021/03/14	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	2021/03/14	1 Year

Note: The Cal.Interval was one year.

5 TEST CONDITIONS AND RESULTS

5.1 AC Power Conducted Emission

TEST CONFIGURATION

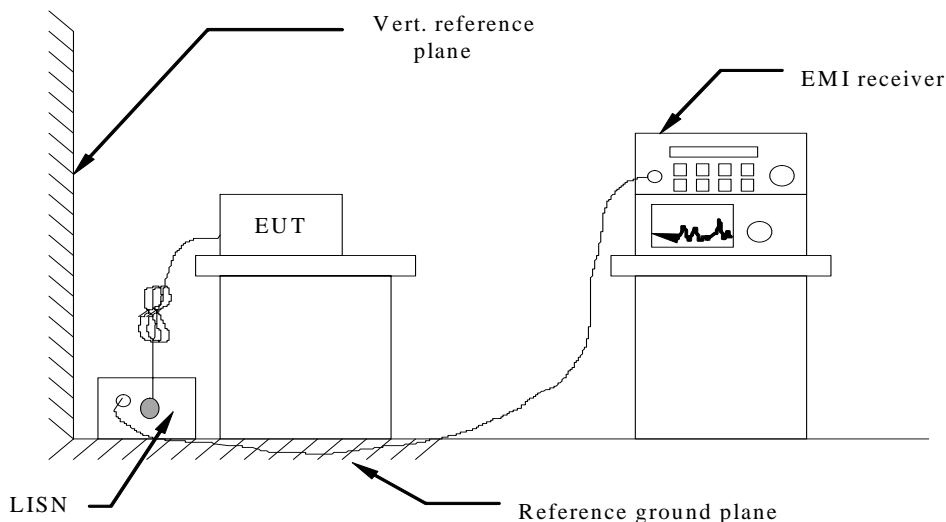

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

N/A

5.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

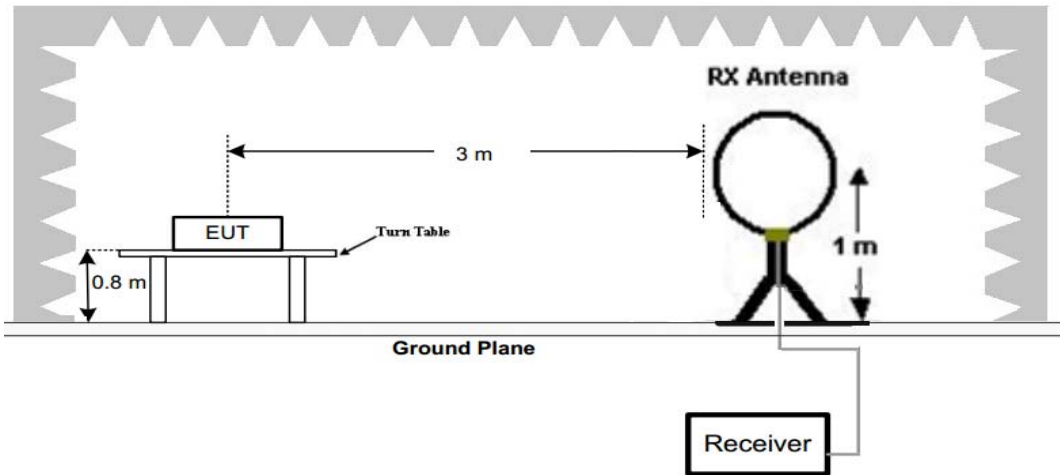

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

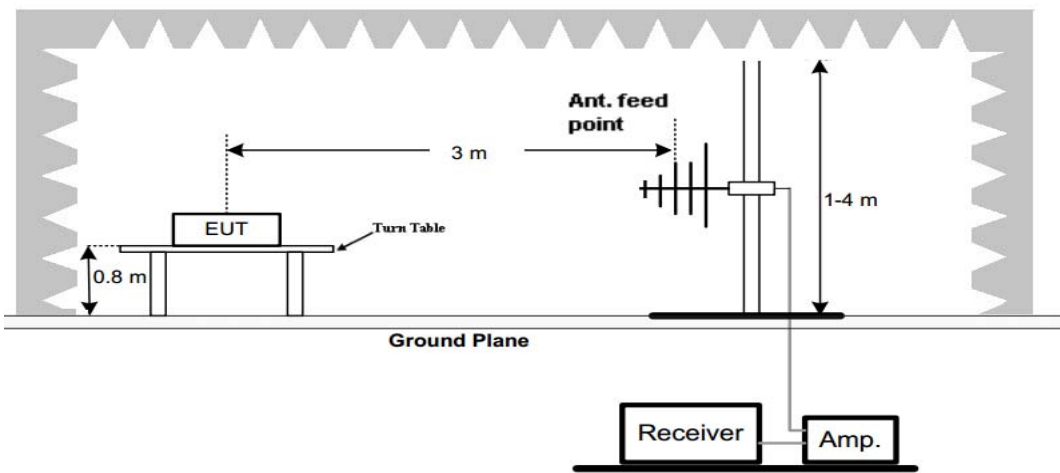

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

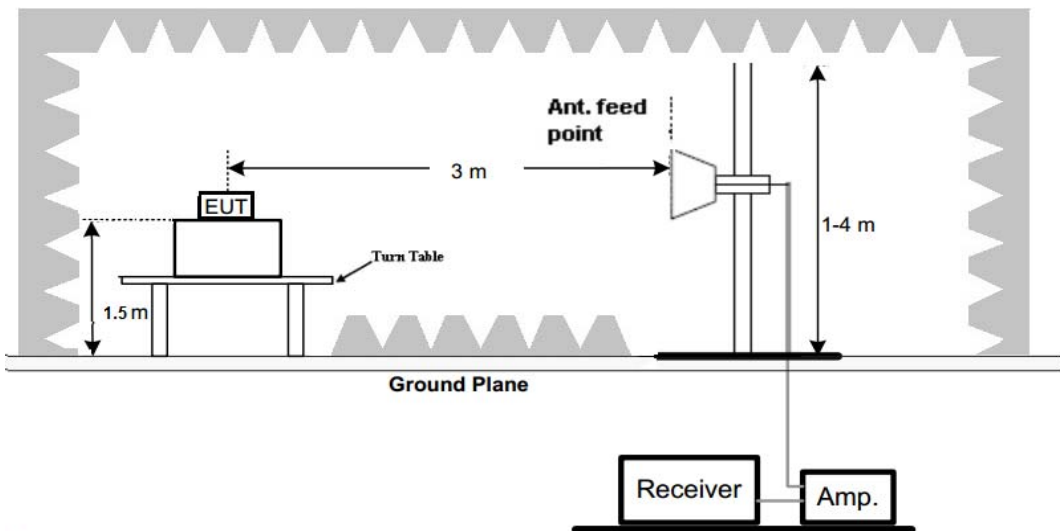

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:


Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:


- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for below 1GHz test, only the worst case 802.11a low channel of U-NII 1 band was recorded.
- All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
- Remark: Result=Reading value+Factor

For 30MHz-1GHz

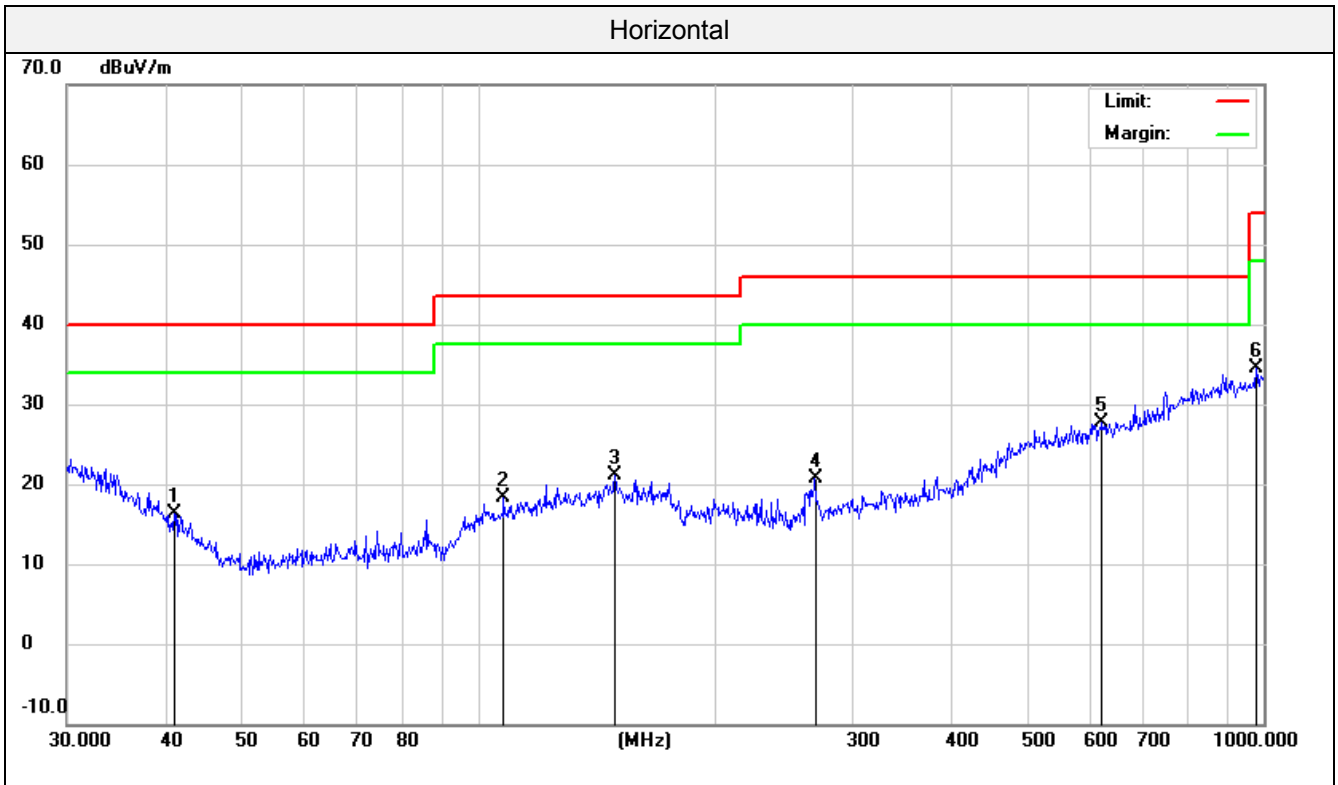

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		41.1320	3.23	13.05	16.28	40.00	-23.72	QP	200	180	
2		107.8877	3.85	14.47	18.32	43.50	-25.18	QP	200	180	
3		149.4857	3.48	17.63	21.11	43.50	-22.39	QP	200	360	
4		268.4853	6.31	14.43	20.74	46.00	-25.26	QP	200	360	
5	*	622.8900	3.58	24.10	27.68	46.00	-18.32	QP	200	355	
6		979.1804	4.68	29.79	34.47	54.00	-19.53	QP	200	326	

*:Maximum data x:Over limit !:over margin

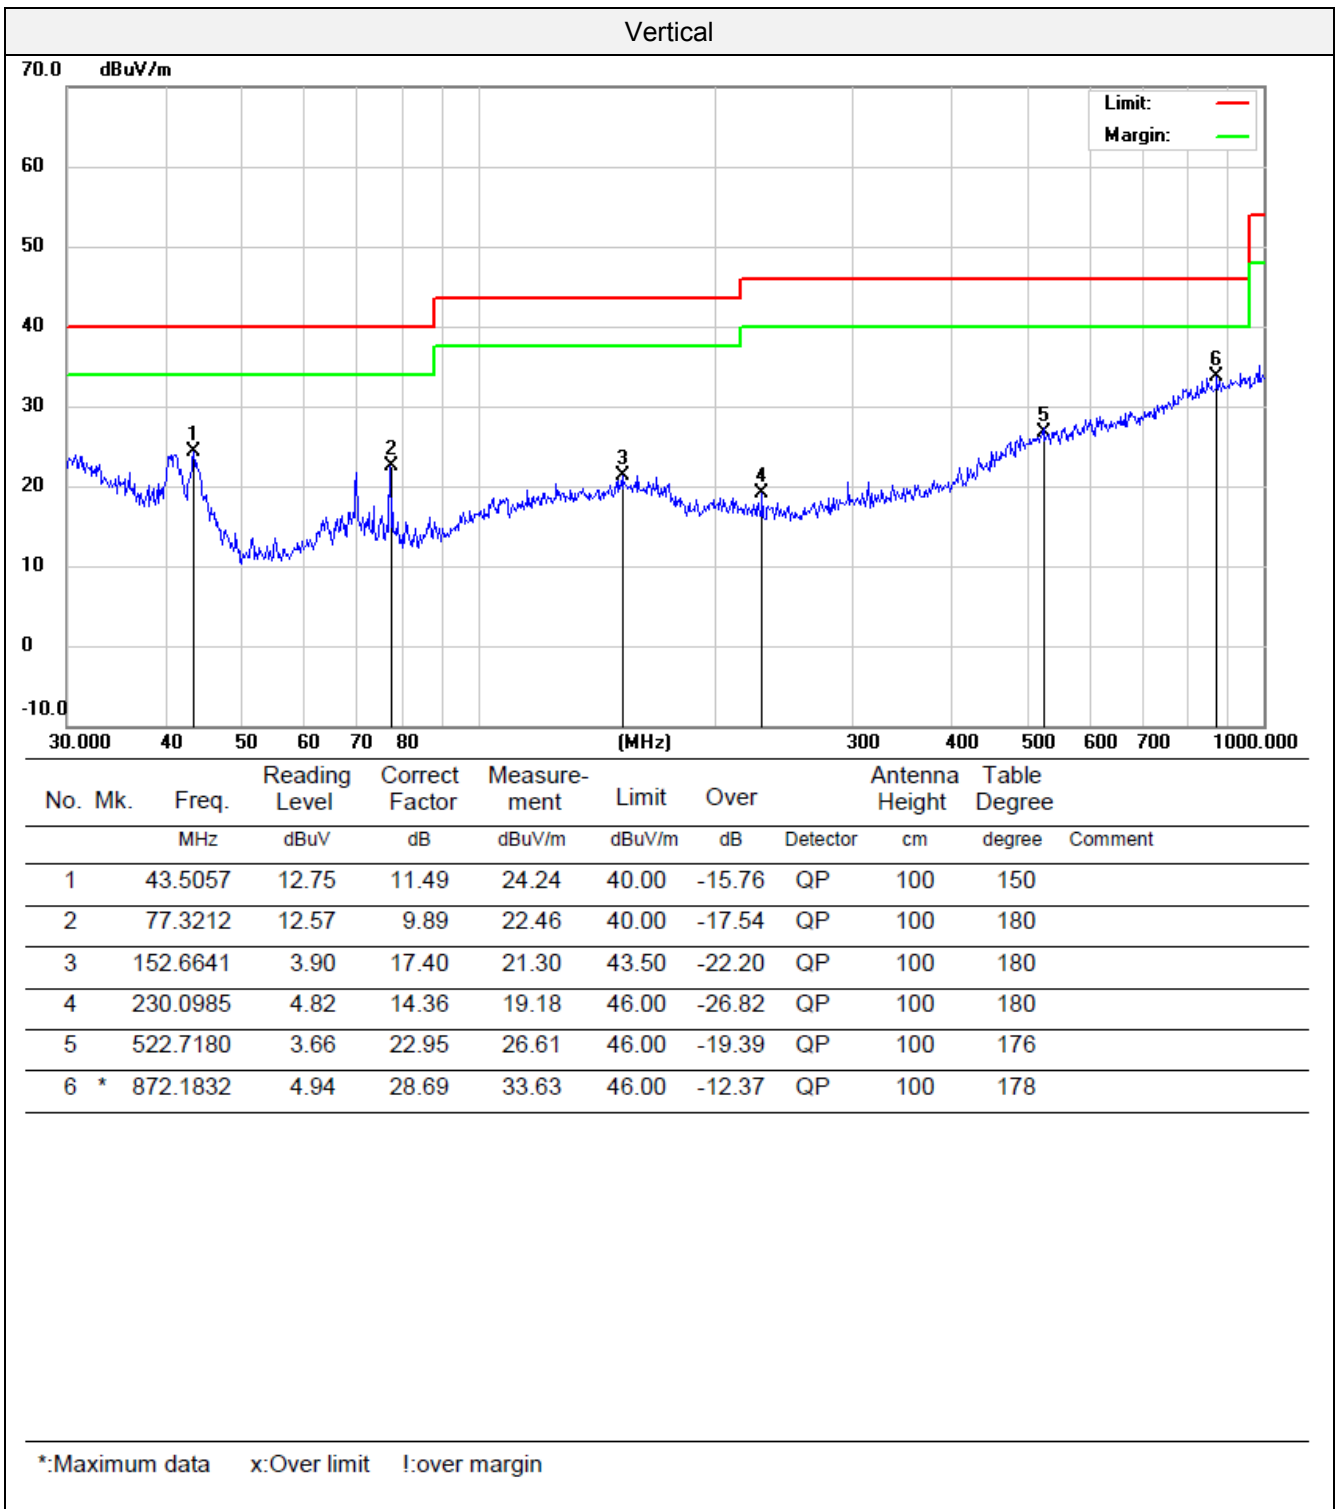

For 1GHz to 40GHz

Note: All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11a Mode -5180MHz									
V	3586	55.53	29.03	5.24	36.4	53.4	68.2	14.8	PK
V	3586	42.36	29.03	5.24	36.4	40.23	54	13.77	AV
H	3586	54.85	29.03	5.24	36.4	52.72	68.2	15.48	PK
H	3586	47.32	29.03	5.24	36.4	45.19	54	8.81	AV
V	10360	34.64	39.41	11.45	34.28	51.22	68.2	16.98	PK
V	10360	24.54	39.41	11.45	34.28	41.12	54	12.88	AV
H	10360	34.61	39.41	11.45	34.28	51.19	68.2	17.01	PK
H	10360	28.15	39.41	11.45	34.28	44.73	54	9.27	AV
802.11a Mode -5200MHz									
V	3586	54.42	29.03	5.24	36.4	52.29	68.2	15.91	PK
V	3586	43.5	29.03	5.24	36.4	41.37	54	12.63	AV
H	3586	53.1	29.03	5.24	36.4	50.97	68.2	17.23	PK
H	3586	47.89	29.03	5.24	36.4	45.76	54	8.24	AV
V	10400	34.83	39.42	11.47	34.28	51.44	68.2	16.76	PK
V	10400	25.47	39.42	11.47	34.28	42.08	54	11.92	AV
H	10400	36.85	39.42	11.47	34.28	53.46	68.2	14.74	PK
H	10400	28.8	39.42	11.47	34.28	45.41	54	8.59	AV
802.11b Mode -5240MHz									
V	3586	55.13	29.03	5.24	36.4	53	68.2	15.2	PK
V	3586	43.5	29.03	5.24	36.4	41.37	54	12.63	AV
H	3586	52.56	29.03	5.24	36.4	50.43	68.2	17.77	PK
H	3586	48.79	29.03	5.24	36.4	46.66	54	7.34	AV
V	10480	35.78	39.43	11.47	34.28	52.4	68.2	15.8	PK
V	10480	27.08	39.43	11.47	34.28	43.7	54	10.3	AV
H	10480	35.69	39.43	11.47	34.28	52.31	68.2	15.89	PK
H	10480	27.54	39.43	11.47	34.28	44.16	54	9.84	AV

U-NII 2A

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11a Mode -5260MHz									
V	3603	54.42	29.03	5.24	36.4	52.29	68.2	15.91	PK
V	3603	43.11	29.03	5.24	36.4	40.98	54	13.02	AV
H	3603	54.96	29.03	5.24	36.4	52.83	68.2	15.37	PK
H	3603	48.39	29.03	5.24	36.4	46.26	54	7.74	AV
V	10520	34.33	39.43	11.47	34.28	50.95	68.2	17.25	PK
V	10520	23.55	39.43	11.47	34.28	40.17	54	13.83	AV
H	10520	36.06	39.43	11.47	34.28	52.68	68.2	15.52	PK
H	10520	28.03	39.43	11.47	34.28	44.65	54	9.35	AV
802.11a Mode -5280MHz									
V	3603	54.91	29.03	5.24	36.4	52.78	68.2	15.42	PK
V	3603	43.81	29.03	5.24	36.4	41.68	54	12.32	AV
H	3603	54.45	29.03	5.24	36.4	52.32	68.2	15.88	PK
H	3603	47.88	29.03	5.24	36.4	45.75	54	8.25	AV
V	10560	37.39	39.43	11.47	34.28	54.01	68.2	14.19	PK
V	10560	26.45	39.43	11.47	34.28	43.07	54	10.93	AV
H	10560	36.03	39.43	11.47	34.28	52.65	68.2	15.55	PK
H	10560	26.75	39.43	11.47	34.28	43.37	54	10.63	AV
802.11b Mode -5320MHz									
V	3603	52.57	29.03	5.24	36.4	50.44	68.2	17.76	PK
V	3603	43	29.03	5.24	36.4	40.87	54	13.13	AV
H	3603	54.93	29.03	5.24	36.4	52.8	68.2	15.4	PK
H	3603	46.86	29.03	5.24	36.4	44.73	54	9.27	AV
V	10640	36.08	39.44	11.47	34.28	52.71	68.2	15.49	PK
V	10640	26.6	39.44	11.47	34.28	43.23	54	10.77	AV
H	10640	34.96	39.44	11.47	34.28	51.59	68.2	16.61	PK
H	10640	28.17	39.44	11.47	34.28	44.8	54	9.2	AV

U-NII 2C

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a Mode -5500MHz									
V	4982	51.63	32.52	5.24	36.4	52.99	68.2	15.21	PK
V	4982	40.16	32.52	5.24	36.4	41.52	54	12.48	AV
H	4982	48.89	32.52	5.24	36.4	50.25	68.2	17.95	PK
H	4982	45.14	32.52	5.24	36.4	46.5	54	7.5	AV
V	11000	35.92	39.46	11.47	34.28	52.57	68.2	15.63	PK
V	11000	24.1	39.46	11.47	34.28	40.75	54	13.25	AV
H	11000	36.08	39.46	11.47	34.28	52.73	68.2	15.47	PK
H	11000	27.46	39.46	11.47	34.28	44.11	54	9.89	AV
802.11a Mode -5600MHz									
V	4982	49.51	32.52	5.24	36.4	50.87	68.2	17.33	PK
V	4982	39.23	32.52	5.24	36.4	40.59	54	13.41	AV
H	4982	51.63	32.52	5.24	36.4	52.99	68.2	15.21	PK
H	4982	44.8	32.52	5.24	36.4	46.16	54	7.84	AV
V	11200	35.58	39.46	11.47	34.28	52.23	68.2	15.97	PK
V	11200	26.9	39.46	11.47	34.28	43.55	54	10.45	AV
H	11200	36.68	39.46	11.47	34.28	53.33	68.2	14.87	PK
H	11200	26.84	39.46	11.47	34.28	43.49	54	10.51	AV
802.11b Mode -5700MHz									
V	4982	50.5	32.52	5.24	36.4	51.86	68.2	16.34	PK
V	4982	40.37	32.52	5.24	36.4	41.73	54	12.27	AV
H	4982	49.35	32.52	5.24	36.4	50.71	68.2	17.49	PK
H	4982	43.45	32.52	5.24	36.4	44.81	54	9.19	AV
V	11400	37.37	39.46	11.47	34.28	54.02	68.2	14.18	PK
V	11400	25.74	39.46	11.47	34.28	42.39	54	11.61	AV
H	11400	34.58	39.46	11.47	34.28	51.23	68.2	16.97	PK
H	11400	27.12	39.46	11.47	34.28	43.77	54	10.23	AV

U-NII 3

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a Mode -5500MHz									
V	5112	53.25	32.84	5.24	36.4	54.93	68.2	13.27	PK
V	5112	39.1	32.84	5.24	36.4	40.78	54	13.22	AV
H	5112	48.73	32.84	5.24	36.4	50.41	68.2	17.79	PK
H	5112	42.39	32.84	5.24	36.4	44.07	54	9.93	AV
V	11490	35.53	39.52	11.47	34.28	52.24	68.2	15.96	PK
V	11490	23.49	39.52	11.47	34.28	40.2	54	13.8	AV
H	11490	36.01	39.52	11.47	34.28	52.72	68.2	15.48	PK
H	11490	27.07	39.52	11.47	34.28	43.78	54	10.22	AV
802.11a Mode -5600MHz									
V	5112	49.81	32.84	5.24	36.4	51.49	68.2	16.71	PK
V	5112	39.09	32.84	5.24	36.4	40.77	54	13.23	AV
H	5112	49.69	32.84	5.24	36.4	51.37	68.2	16.83	PK
H	5112	43.46	32.84	5.24	36.4	45.14	54	8.86	AV
V	11570	35.83	39.52	11.47	34.28	52.54	68.2	15.66	PK
V	11570	27.01	39.52	11.47	34.28	43.72	54	10.28	AV
H	11570	36.31	39.52	11.47	34.28	53.02	68.2	15.18	PK
H	11570	26.94	39.52	11.47	34.28	43.65	54	10.35	AV
802.11b Mode -5700MHz									
V	5112	51.04	32.84	5.24	36.4	52.72	68.2	15.48	PK
V	5112	39.86	32.84	5.24	36.4	41.54	54	12.46	AV
H	5112	49.1	32.84	5.24	36.4	50.78	68.2	17.42	PK
H	5112	43.28	32.84	5.24	36.4	44.96	54	9.04	AV
V	11650	36.41	39.52	11.47	34.28	53.12	68.2	15.08	PK
V	11650	26.43	39.52	11.47	34.28	43.14	54	10.86	AV
H	11650	35.16	39.52	11.47	34.28	51.87	68.2	16.33	PK
H	11650	29.1	39.52	11.47	34.28	45.81	54	8.19	AV

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Radiated Band Edge Test:

All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a									
V	5150	56.35	31.22	7.62	36.5	58.69	74	15.31	PK
V	5150	38.95	31.22	7.62	36.5	41.29	54	12.71	AV
H	5150	54.85	31.22	7.62	36.5	57.19	74	16.81	PK
H	5150	42.19	31.22	7.62	36.5	44.53	54	9.47	AV
V	5350	55.12	31.56	7.83	35.82	58.69	74	15.31	PK
V	5350	39.36	31.56	7.83	35.82	42.93	54	11.07	AV
H	5350	55.47	31.56	7.83	35.82	59.04	74	14.96	PK
H	5350	41.7	31.56	7.83	35.82	45.27	54	8.73	AV

U-NII 2A

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a									
V	5150	54.87	31.22	7.62	36.5	57.21	74	16.79	PK
V	5150	38.27	31.22	7.62	36.5	40.61	54	13.39	AV
H	5150	55.97	31.22	7.62	36.5	58.31	74	15.69	PK
H	5150	42.48	31.22	7.62	36.5	44.82	54	9.18	AV
V	5350	54.36	31.56	7.83	35.82	57.93	74	16.07	PK
V	5350	39.56	31.56	7.83	35.82	43.13	54	10.87	AV
H	5350	53.62	31.56	7.83	35.82	57.19	74	16.81	PK
H	5350	39.77	31.56	7.83	35.82	43.34	54	10.66	AV

U-NII 2C

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a									
V	5460	52.91	31.62	7.89	35.76	56.66	74	17.34	PK
V	5460	37.41	31.62	7.89	35.76	41.16	54	12.84	AV
H	5460	53.95	31.62	7.89	35.76	57.7	74	16.3	PK
H	5460	41.85	31.62	7.89	35.76	45.6	54	8.4	AV
V	5850	53.12	31.71	7.92	35.55	57.2	74	16.8	PK
V	5850	39.76	31.71	7.92	35.55	43.84	54	10.16	AV
H	5850	54.08	31.71	7.92	35.55	58.16	74	15.84	PK
H	5850	39.49	31.71	7.92	35.55	43.57	54	10.43	AV

U-NII 3

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a									
V	5460	54.41	31.62	7.89	35.76	58.16	74	15.84	PK
V	5460	36.4	31.62	7.89	35.76	40.15	54	13.85	AV
H	5460	52.36	31.62	7.89	35.76	56.11	74	17.89	PK
H	5460	43.05	31.62	7.89	35.76	46.8	54	7.2	AV
V	5850	54.95	31.71	7.92	35.55	59.03	74	14.97	PK
V	5850	38.71	31.71	7.92	35.55	42.79	54	11.21	AV
H	5850	54.08	31.71	7.92	35.55	58.16	74	15.84	PK
H	5850	41.75	31.71	7.92	35.55	45.83	54	8.17	AV

5.3 Conduction spurious emission

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW


Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

Test Configuration

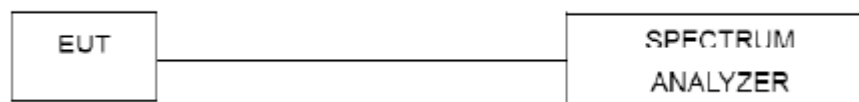

TEST RESULTS

U-NII 1

802.11a



CH36

CH40



CH48

802.11n(HT20)



CH36



CH40



CH48

802.11n(HT40)



CH38



CH46

802.11ac(HT20)



CH36



CH40



CH48

802.11ac(HT40)



CH38



CH46

802.11ac(HT80)



CH42

U-NII 2A

802.11a



CH52



CH56



CH64

802.11n(HT20)



CH52



CH56



CH64

802.11n(HT40)



CH54



CH62

802.11ac(HT20)



CH52




CH56



CH64

802.11ac(HT40)

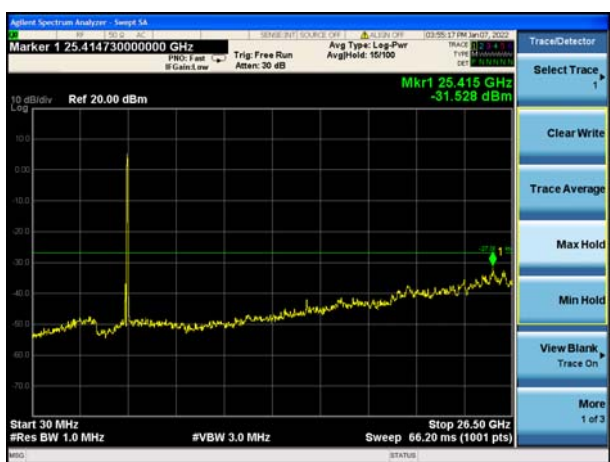

CH54



CH62

802.11ac(HT80)



CH58

U-NII 2C

802.11a



CH100



CH120



CH140

802.11n(HT20)



CH100



CH120



CH140

802.11n(HT40)



CH102



CH118



CH134

802.11ac(HT20)



CH100



CH120



CH140

802.11ac(HT40)



CH102




CH118



CH134

802.11ac(HT80)

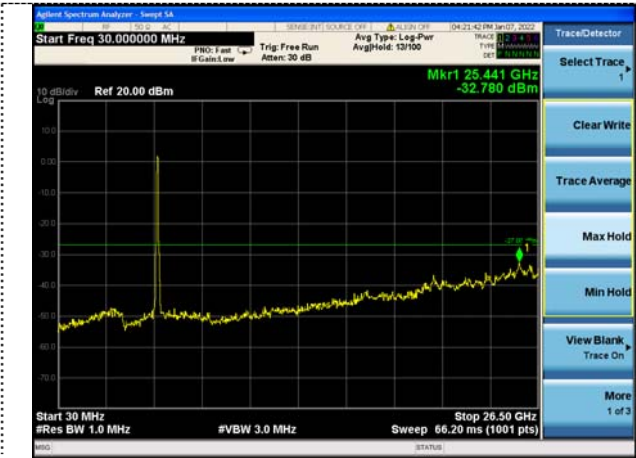

CH106



CH 122

U-NII 3

802.11a



CH149



CH157



CH165

802.11n(HT20)



CH149



CH157



CH165

802.11n(HT40)



CH151



CH159

802.11ac(HT20)



CH149



CH157



CH165

802.11ac(HT40)



CH151



CH159


802.11ac(HT80)




CH155

Band-edge Measurements for RF Conducted Emissions:
U-NII 1

802.11a

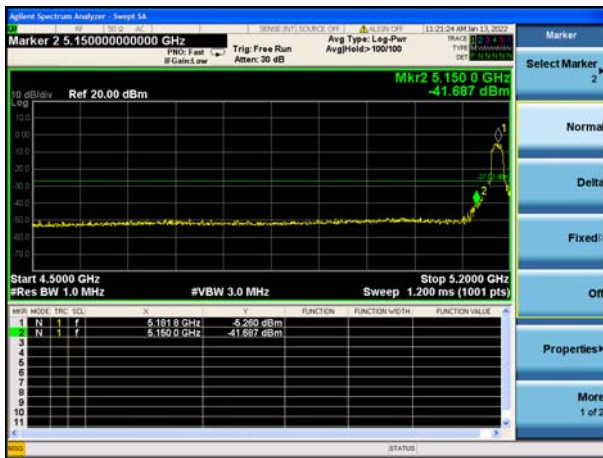


Left bandedge

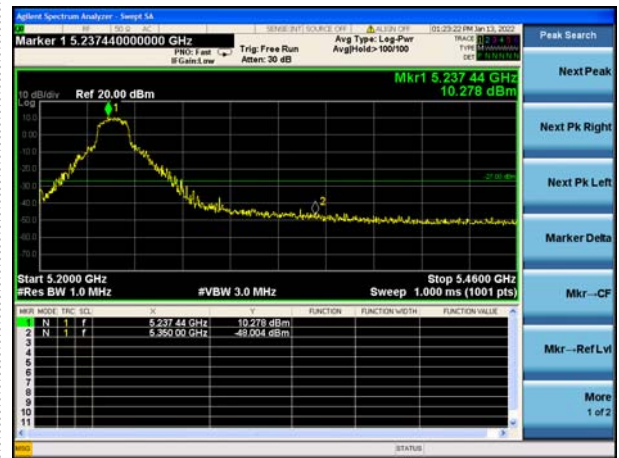


Right bandedge

802.11n(HT20)

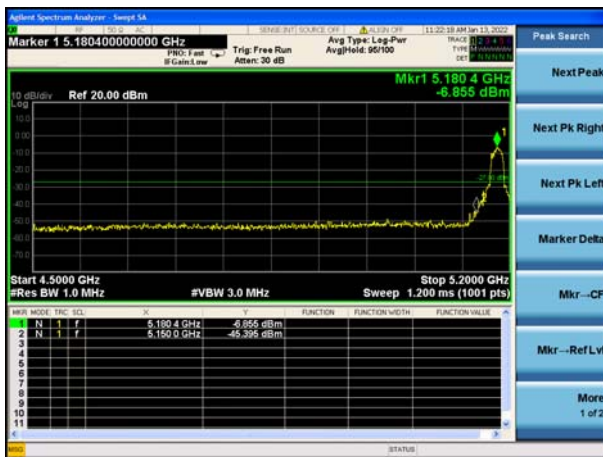


Left bandedge

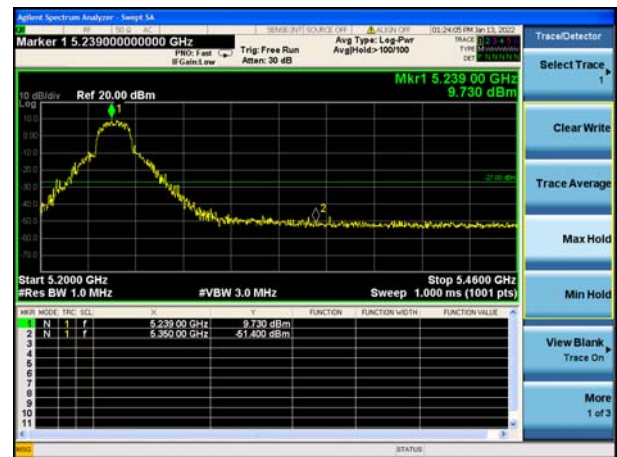


Right bandedge

802.11n(HT40)

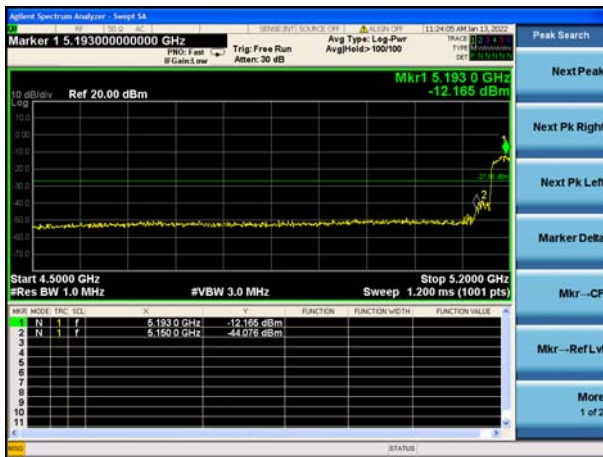


Left bandedge

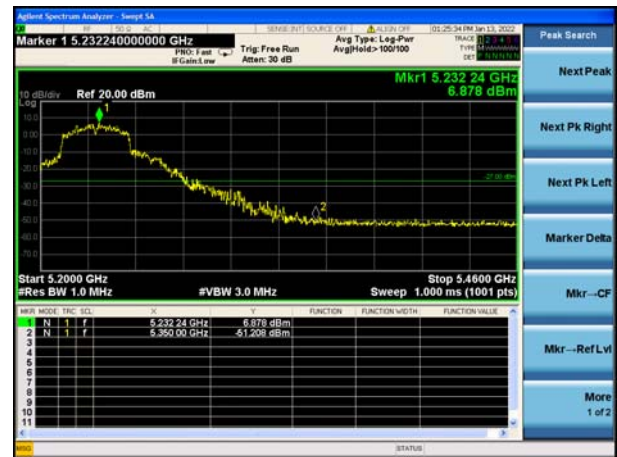


Right bandedge

802.11ac(HT20)

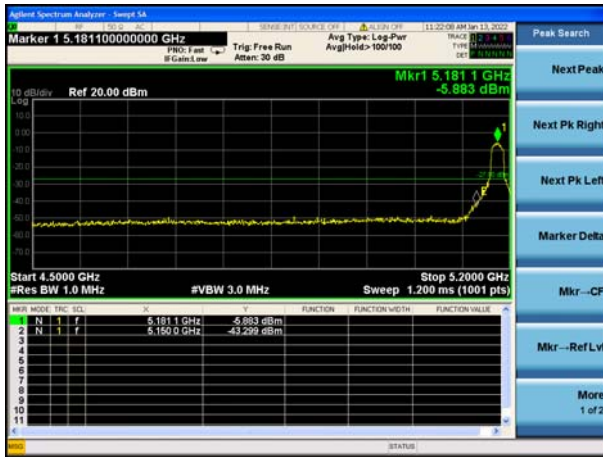


Left bandedge

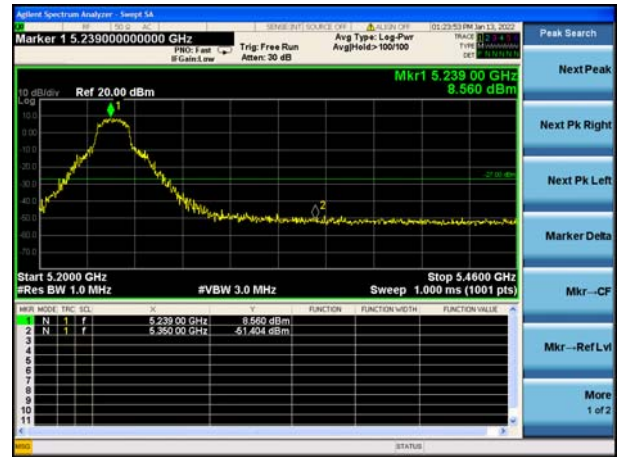

Right bandedge

802.11ac(HT40)

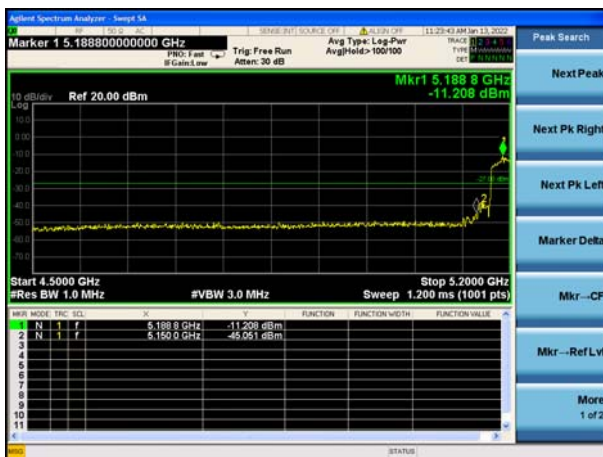


Left bandedge




Right bandedge

802.11ac(HT80)

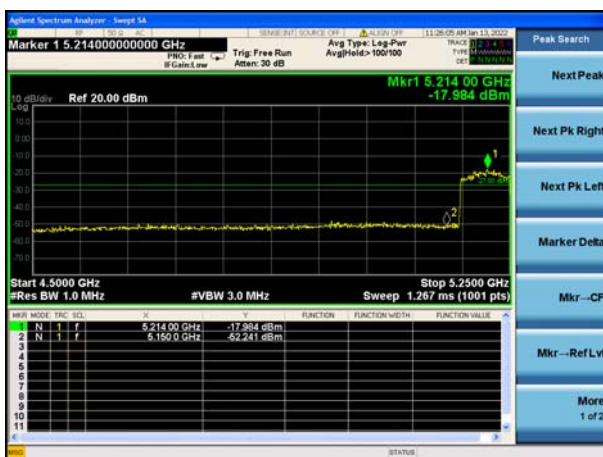


Left bandedge

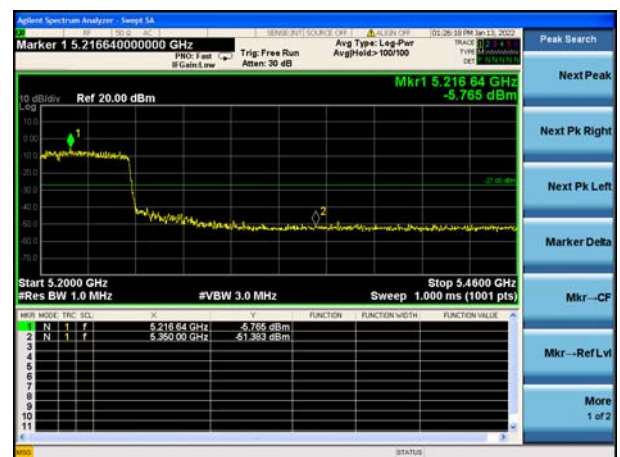


Right bandedge

U-NII 2A

802.11a

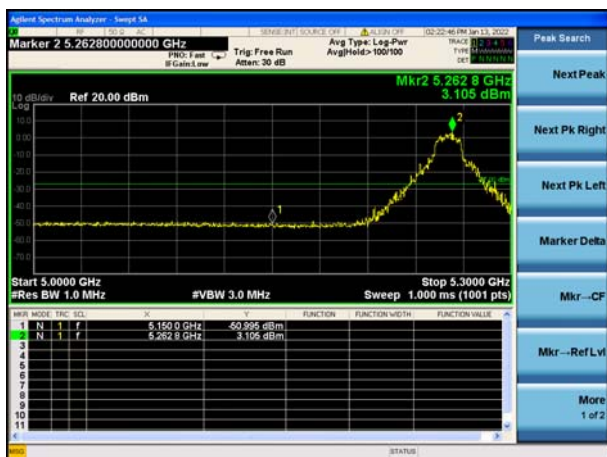


Left bandedge

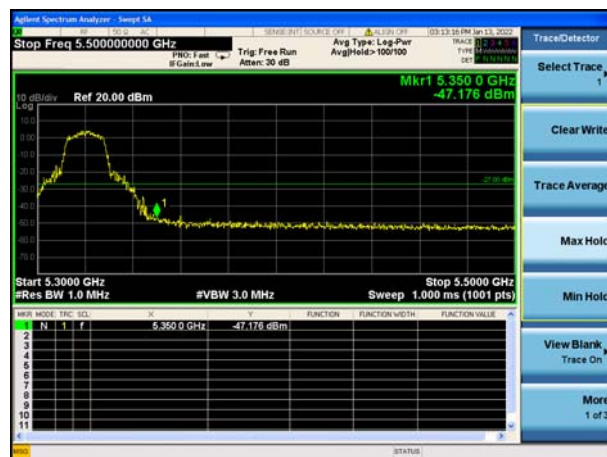


Right bandedge

802.11n(HT20)

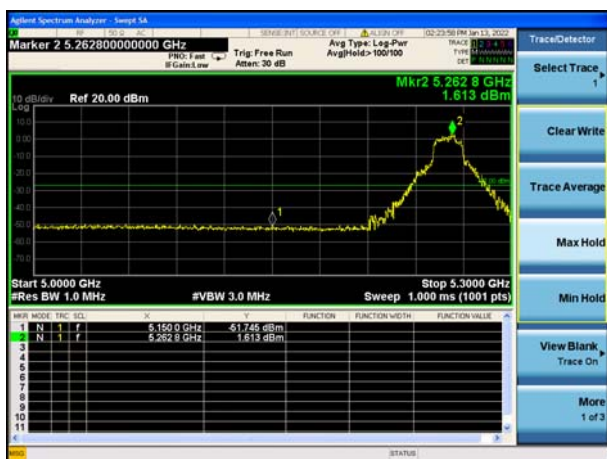


Left bandedge

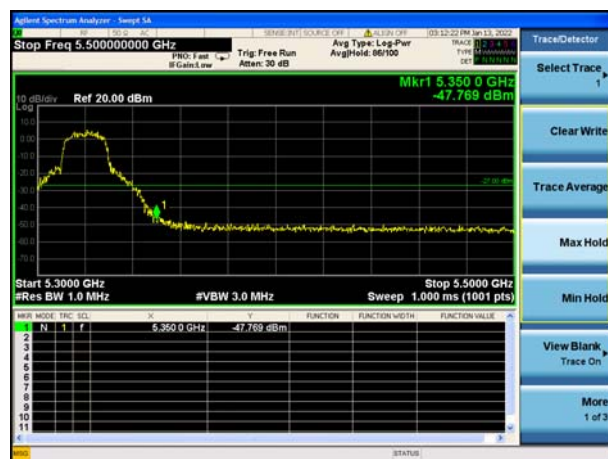


Right bandedge

802.11n(HT40)

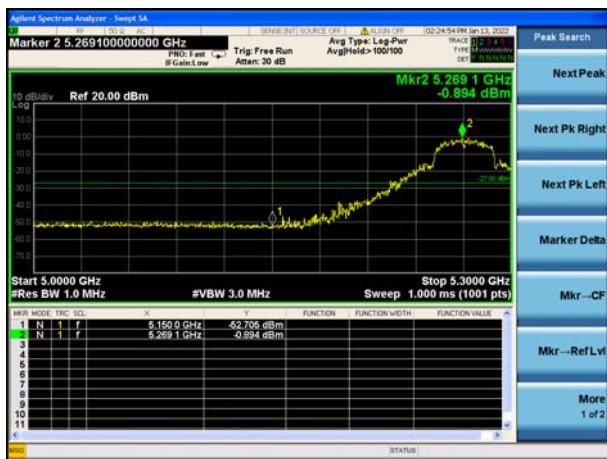


Left bandedge

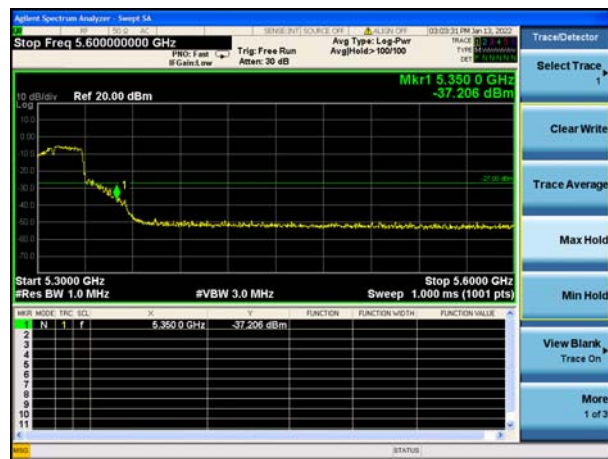

Right bandedge

802.11ac(HT20)

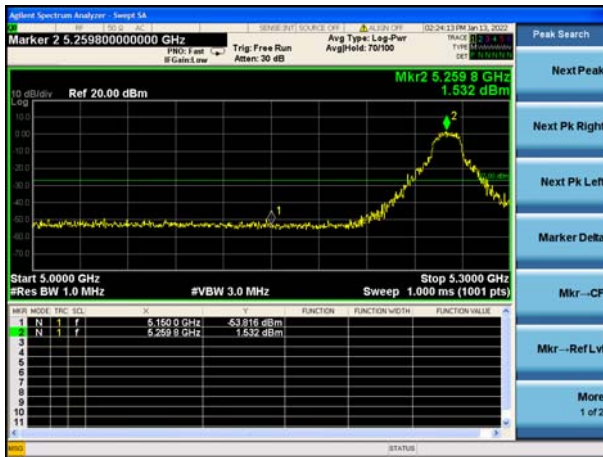

Left bandedge



Right bandedge

802.11ac(HT40)




Left bandedge




Right bandedge

802.11ac(HT80)

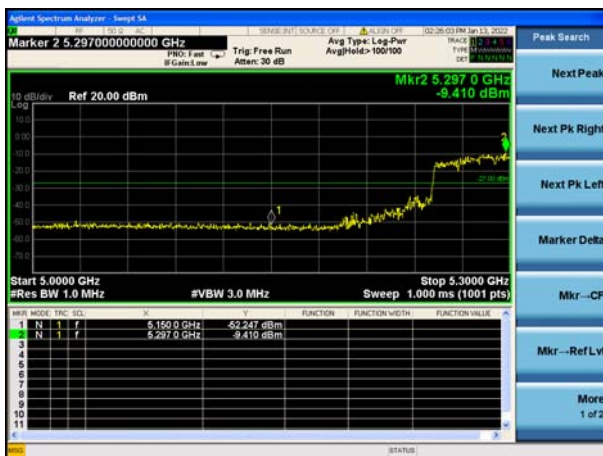


Left bandedge

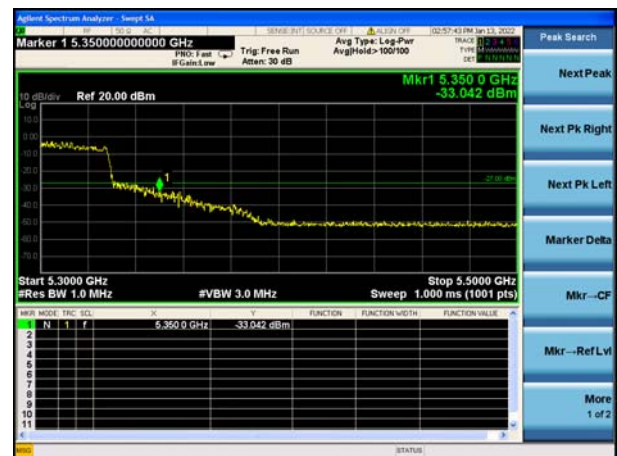


Right bandedge

U-NII 2C

802.11a

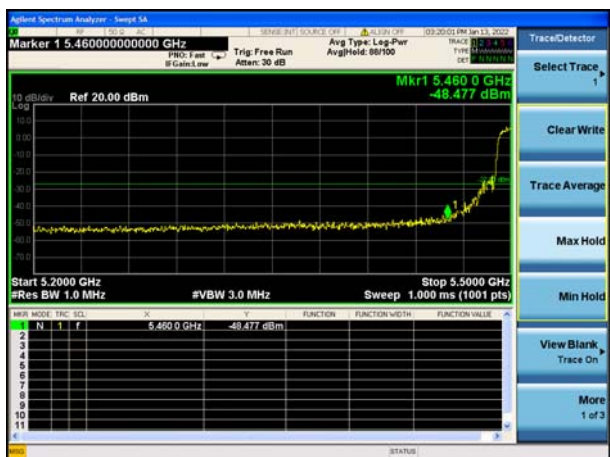


Left bandedge

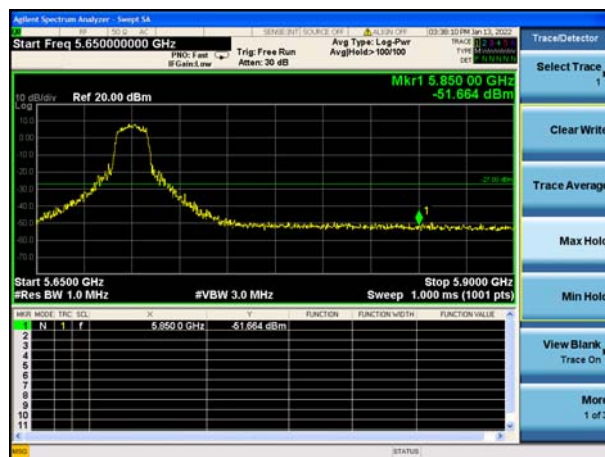


Right bandedge

802.11n(HT20)

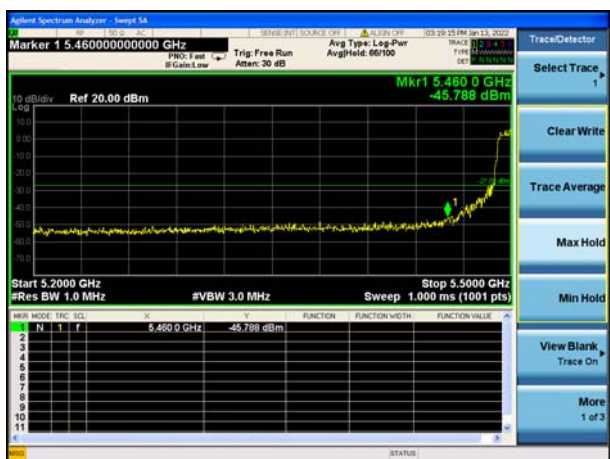

Left bandedge

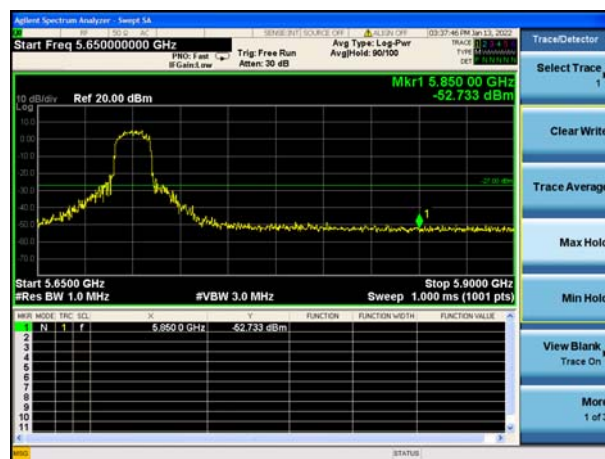


Right bandedge

802.11n(HT40)



Left bandedge

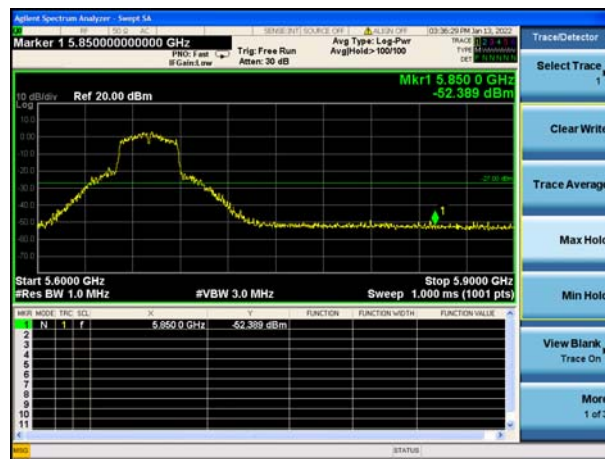


Right bandedge

802.11ac(HT20)



Left bandedge

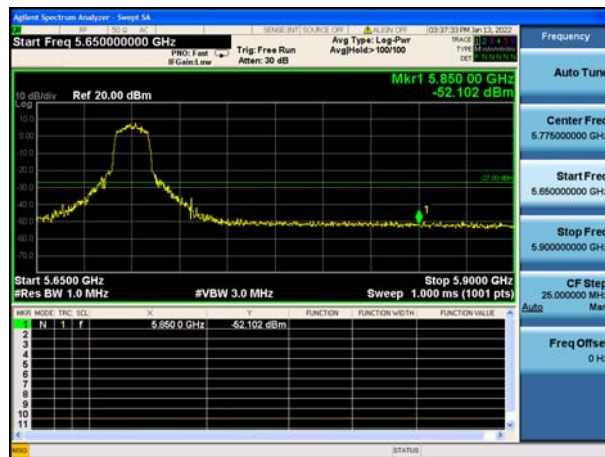

Right bandedge

802.11ac(HT40)



Left bandedge




Right bandedge

802.11ac(HT80)



Left bandedge

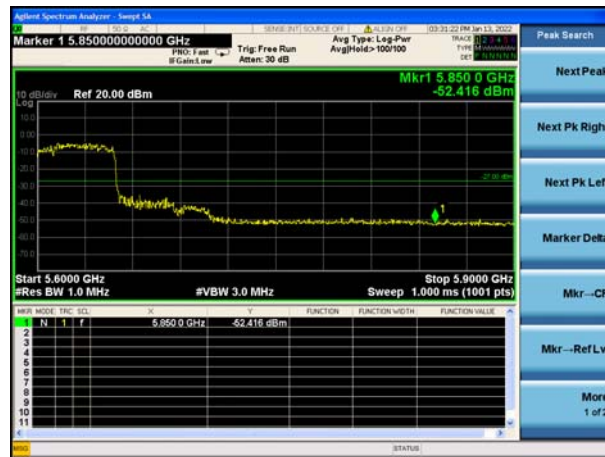

Right bandedge