



REPORT No. : SZ15050021S01

RF EXPOSURE EVALUATION REPORT

APPLICANT : RM Acquisition LLC
PRODUCT NAME : GPS navigation
MODEL NAME : TND 765
TRADE NAME : N/A
BRAND NAME : Rand McNally
FCC ID : A4C01003A
STANDARD(S) : 47CFR 2.1091
KDB 447498 D01 General RF Exposure
Guidance v05r02
ISSUE DATE : 2015-06-30



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION 3

1. TECHNICAL INFORMATION 4

1.1. IDENTIFICATION OF APPLICANT 4

1.2. IDENTIFICATION OF MANUFACTURER 4

1.3. EQUIPMENT UNDER TEST (EUT) 4

1.3.1. PHOTOGRAPHS OF THE EUT 5

1.3.2. IDENTIFICATION OF ALL USED EUT 6

1.4. APPLIED REFERENCE DOCUMENTS 6

2. DEVICE CATEGORY AND RF EXPOSURE LIMIT 7

3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER 8

4. RF EXPOSURE EVALUATION 9

ANNEX C GENERAL INFORMATION 10

Change History		
Issue	Date	Reason for change
1.0	2015-06-30	First edition



REPORT No. : SZ15050021S01

TEST REPORT DECLARATION

Applicant	RM Acquisition LLC
Applicant Address	9855 Woods Drive, Skokies IL 60077
Manufacturer	LONGHORN AUTO LIMITED
Manufacturer Address	Gongyeyuan rd., Dalang street, Longhua , Shenzhen
Product Name	GPS navigation
Model Name	TND 765
Brand Name	Rand McNally
HW Version	RM762_V3.0
SW Version	762.01.01.010
Test Standards	47CFR 2.1091; KDB 447498 D01 General RF Exposure Guidance v05r02
Issue Date	2015-06-30
SAR Evaluation	Not Required

Tested by : Liu Jun
Liu Jun

Reviewed by : Zhu Zhan
Zhu Zhan

Approved by : Zeng Dexin
Zeng Dexin



1. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

1.1. Identification of Applicant

Company Name:	RM Acquisition LLC
Address:	9855 Woods Drive, Skokies IL 60077

1.2. Identification of Manufacturer

Company Name:	LONGHORN AUTO LIMITED
Address:	Gongyeyuan rd., Dalang street, Longhua , Shenzhen

1.3. Equipment Under Test (EUT)


Model Name:	TND 765
Trade Name:	N/A
Brand Name:	Rand McNally
Hardware Version:	RM762_V3.0
Software Version:	762.01.01.010
Frequency Bands:	CDMA/EVDO/EVDO Re.A BC 0: 824-849MHz; CDMA/EVDO/EVDO Re.A BC 1:1850-1910MHz; Wifi802.11b/g/n:2412-2462MHz;
Modulation Mode:	CDMA: CDMA Wifi802.11b: DSSS; Wifi802.11g/n: OFDM;
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype

1.3.1. Photographs of the EUT

1. EUT front view



2. EUT rear view

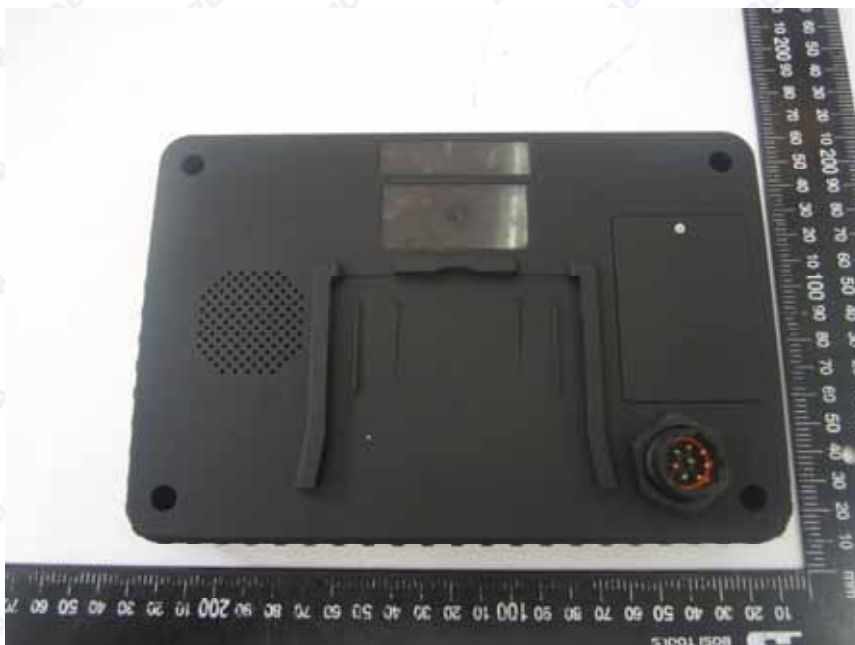



1.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	RM762_V3.0	762.01.01.010

1.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1091	Radiofrequency Radiation Exposure Evaluation: mobile devices
2	KDB 447498 D01v05r02	General RF Exposure Guidance



2. DEVICE CATEGORY AND RF EXPOSURE LIMIT

Per user manual, this device is a GPS navigation. Based on 47CFR 2.1091, this device belongs to mobile device category with General Population/Uncontrolled exposure.

Mobile Devices:

47CFR 2.1091(b)

For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density



3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

1. Wifi 2.4G Conducted Peak Output Power

Band	Channel	Frequency (MHz)	Output Power(dBm)	
			802.11b (DSSS)	802.11g (OFDM)
WiFi 2.4G	1	2412	22.34	23.91
	6	2437	22.56	24.22
	11	2462	22.23	24.05

2. CDMA 1xRTT power

Band	Channel	Frequency (MHz)	Output Power
CDMA BC 0	1013	824.7	27.31
	384	836.52	28.10
	777	848.31	27.79
EVDO BC 0	1013	1851.25	27.30
	384	1880.0	27.87
	777	1908.75	27.64
EVDO A BC 0	1013	1851.25	27.20
	384	1880.0	27.97
	777	1908.75	27.64
CDMA BC 1	25	1851.25	27.10
	600	1880.0	27.14
	1175	1908.75	26.46
EVDO BC 1	25	1851.25	26.05
	600	1880.0	25.74
	1175	1908.75	26.18
EVDO A BC 1	25	1851.25	25.97
	600	1880.0	27.09
	1175	1908.75	26.80



4. RF EXPOSURE EVALUATION

Standalone transmission MPE evaluation

Bands	Frequency (MHz)	Antenna Gain (dBi)	Conducted Power (dBm)	Time-averaging EIRP (mW)	Power density (mW/cm ²)	Limit for MPE (mW/cm ²)
802.11g	2437	0	24.22	264.24	0.05	1.0
CDMA BC0	384	0	28.10	645.65	0.13	0.56
CDMA BC1	600	0	27.14	517.61	0.10	1.0

Note:

1. MPE calculation method

$$\text{Power Density} = \text{EIRP}/4\pi R^2$$

Where: $\text{EIRP} = P \cdot G$

P = Peak out power

G = Antenna gain

R = Separation distance (20cm)



ANNEX C GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

***** END OF REPORT *****