



6.10.2 Test setup


Below 1GHz:

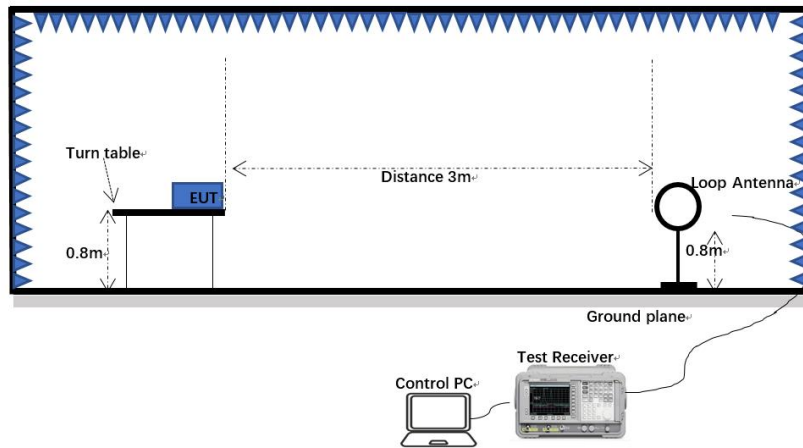

30MHz-1GHz:

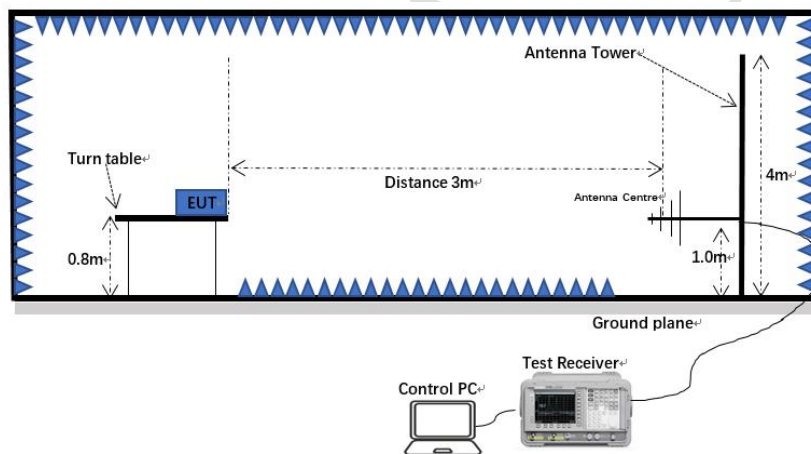

Above 1GHz:

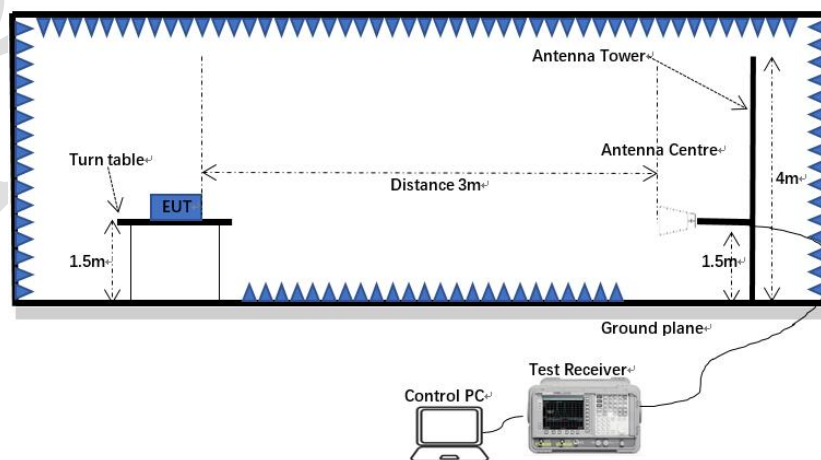

6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown. all modes have been tested, and only the worst mode is showed in the report.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.10.4 Test data

Remark: During the test, pre-scan the GFSK, pi/4QPSK, 8DPSK mode, and found the 8DPSK mode which it is worse case.


Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

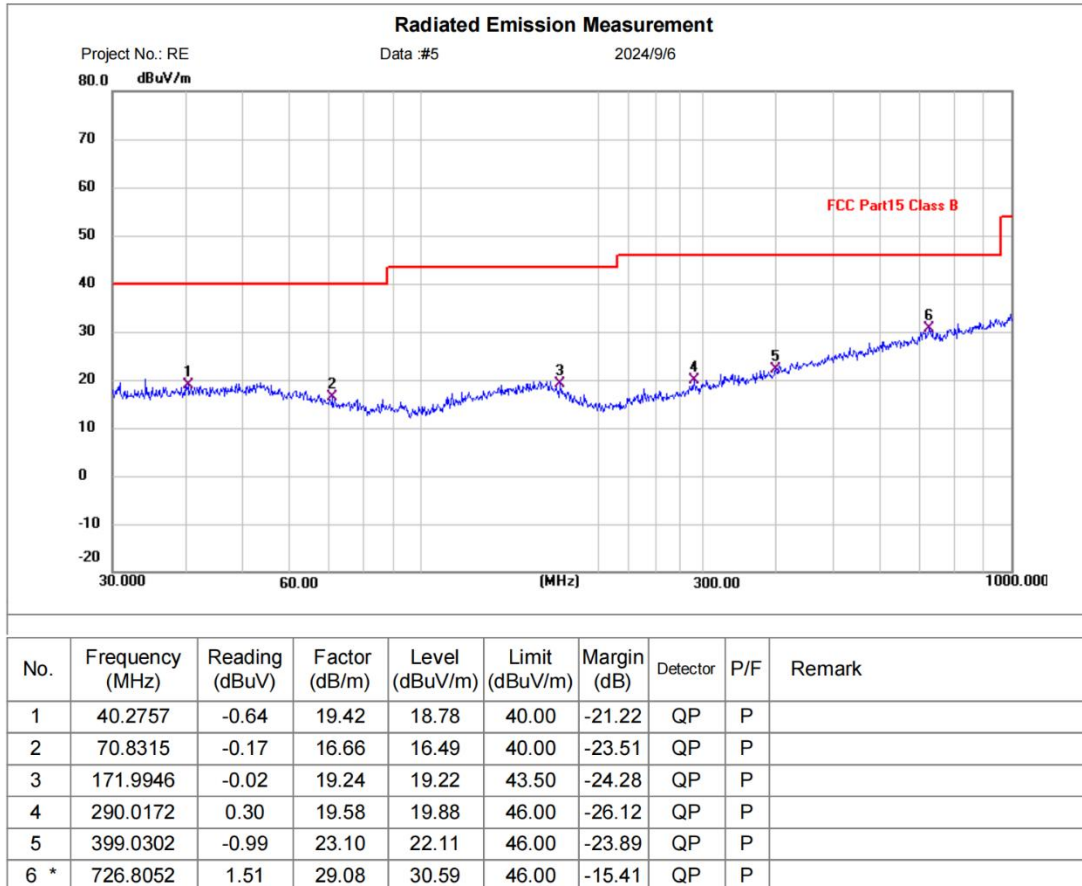

Test Result: Pass

[Test mode: TX]; [Polarity: Vertical]

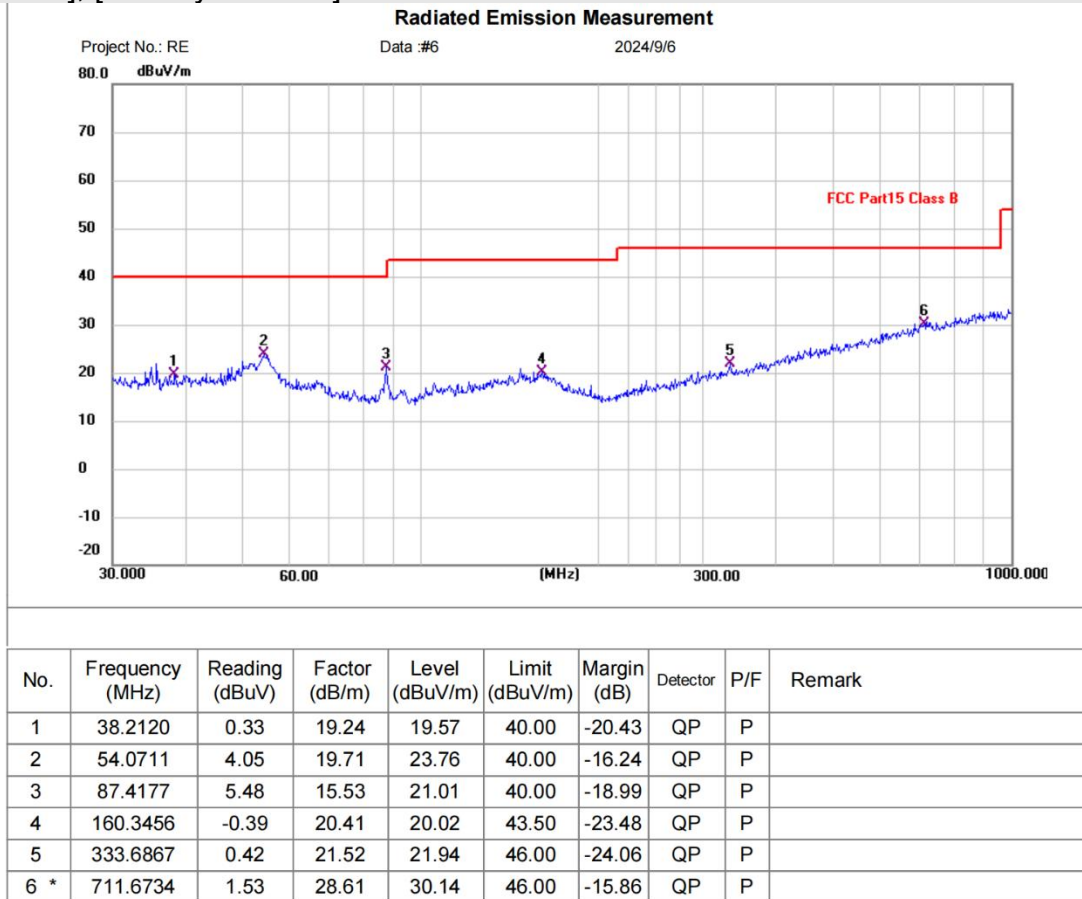


*Maximum data x:Over limit lower margin

Test Result: Pass

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the 8DPSK mode which it is worse case.


Above 1GHz:

[Test mode: TX low channel]; [Polarity: Horizontal]

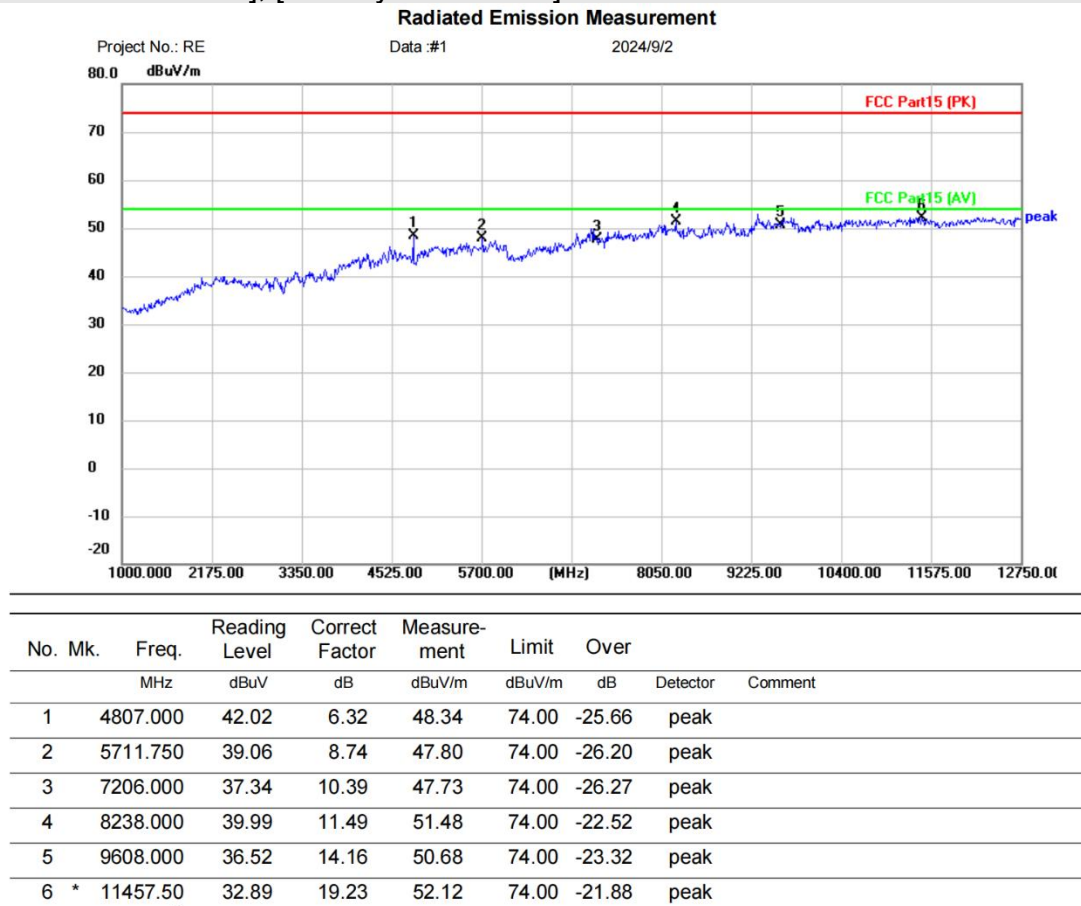

Test Result: Pass


[Test mode: TX low channel]; [Polarity: Vertical]

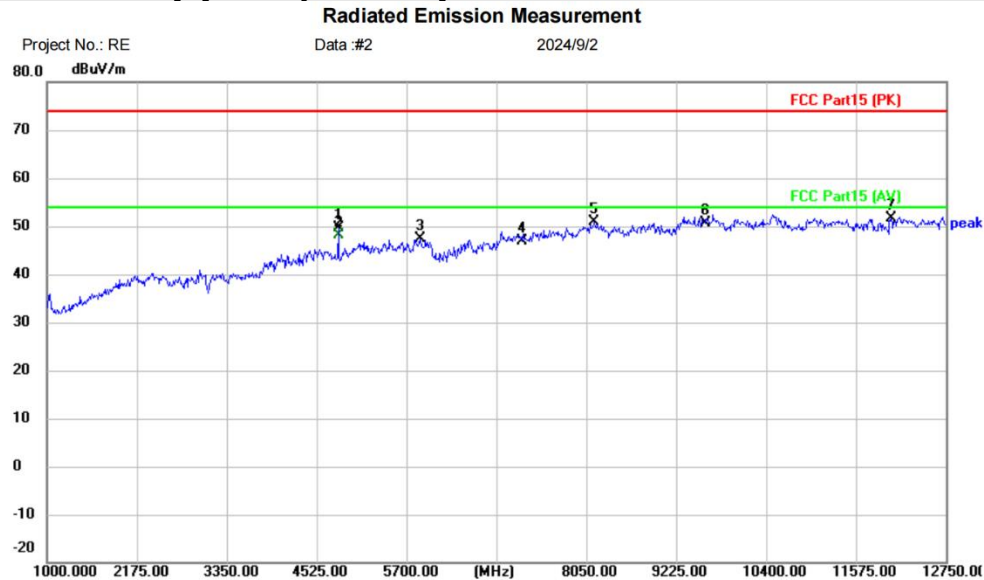

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4807.000	43.25	6.32	49.57	74.00	-24.43	peak	
2	*	4807.000	41.90	6.32	48.22	54.00	-5.78	AVG	
3		5876.250	38.30	8.99	47.29	74.00	-26.71	peak	
4		7206.000	36.58	10.39	46.97	74.00	-27.03	peak	
5		8155.750	39.27	11.64	50.91	74.00	-23.09	peak	
6		9608.000	36.50	14.16	50.66	74.00	-23.34	peak	
7		12033.25	32.80	18.83	51.63	74.00	-22.37	peak	

Test Result: Pass


[Test mode: TX middle channel]; [Polarity: Horizontal]

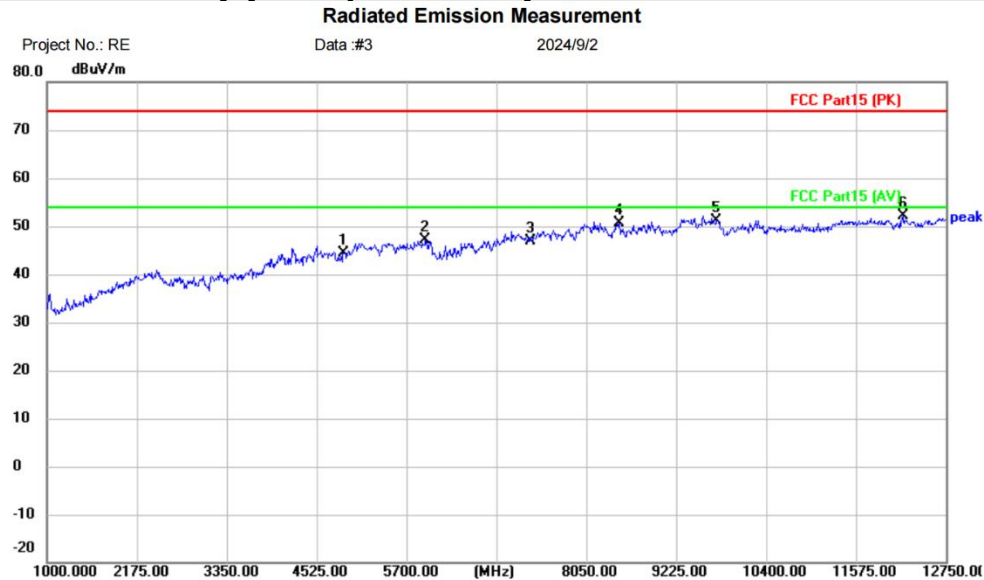

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		4882.000	38.07	6.43	44.50	74.00	-29.50	peak	
2		5946.750	38.20	9.03	47.23	74.00	-26.77	peak	
3		7323.000	36.62	10.17	46.79	74.00	-27.21	peak	
4		8484.750	38.62	11.89	50.51	74.00	-23.49	peak	
5		9764.000	36.16	14.96	51.12	74.00	-22.88	peak	
6	*	12197.75	33.14	18.97	52.11	74.00	-21.89	peak	


Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

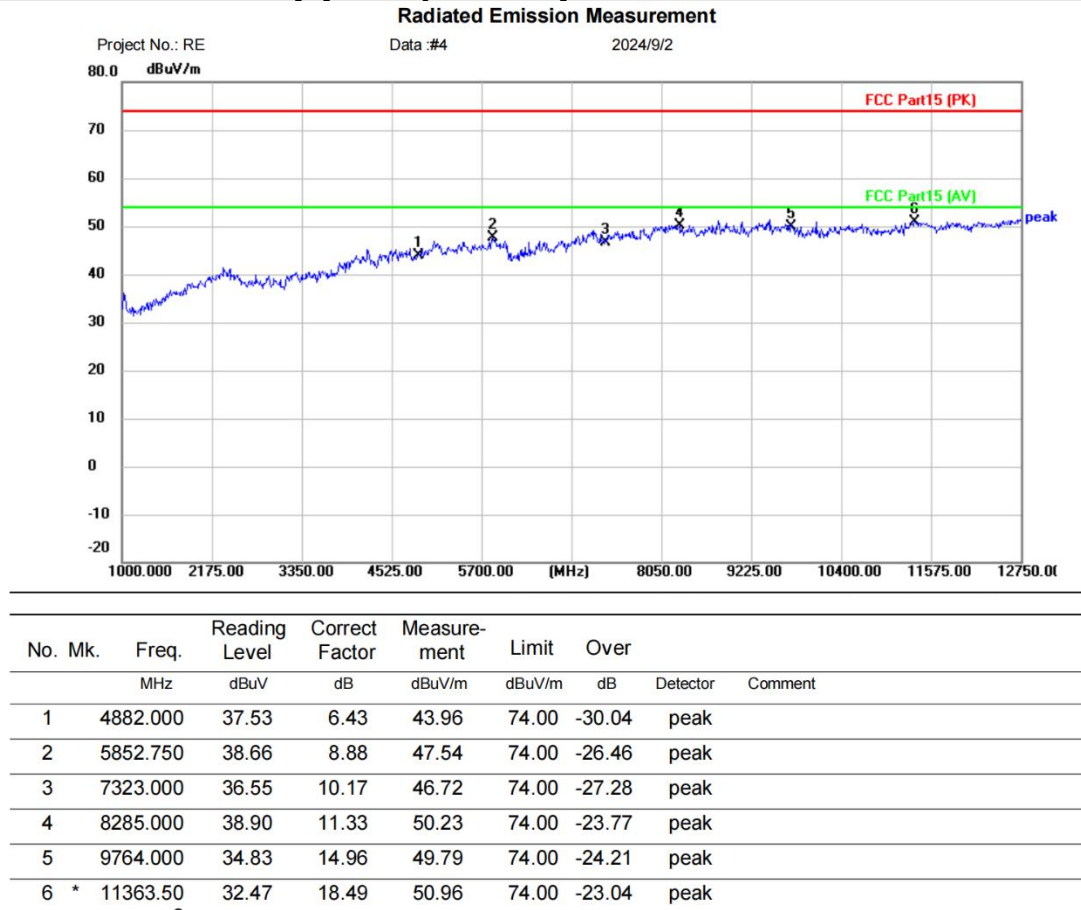


Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

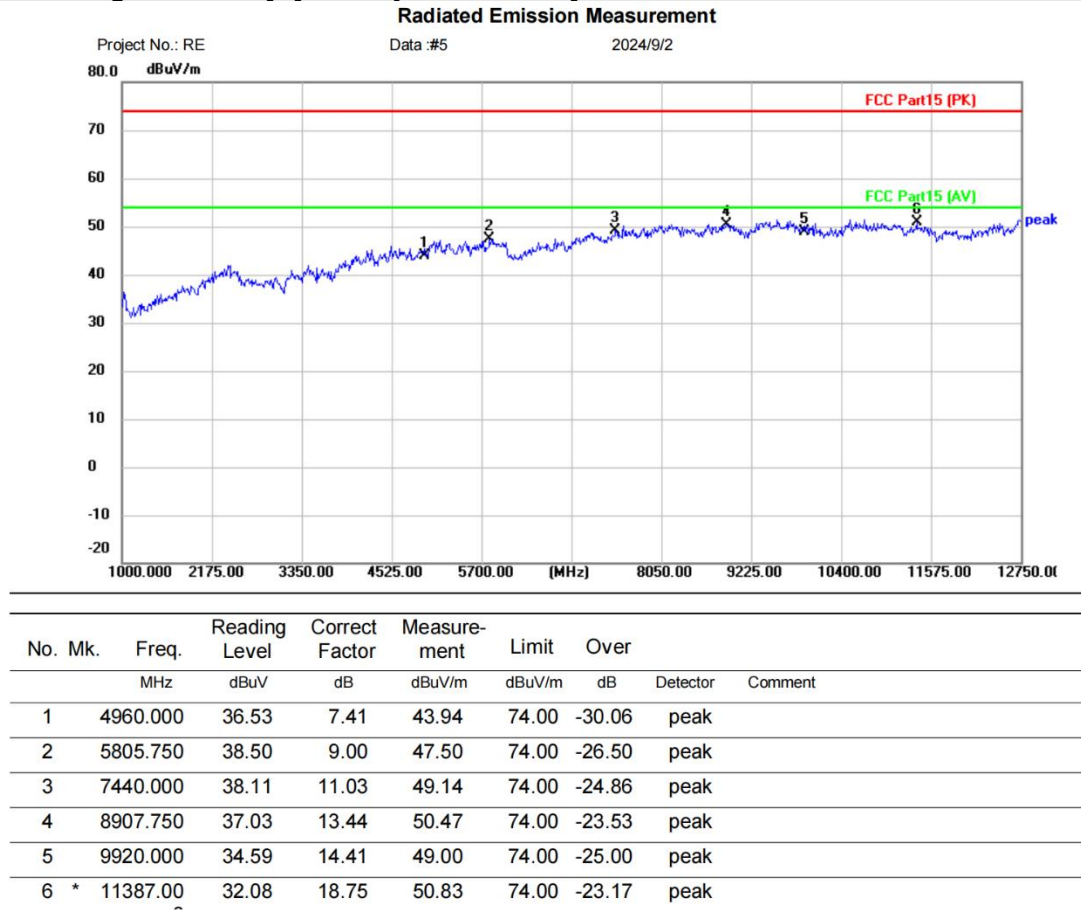

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

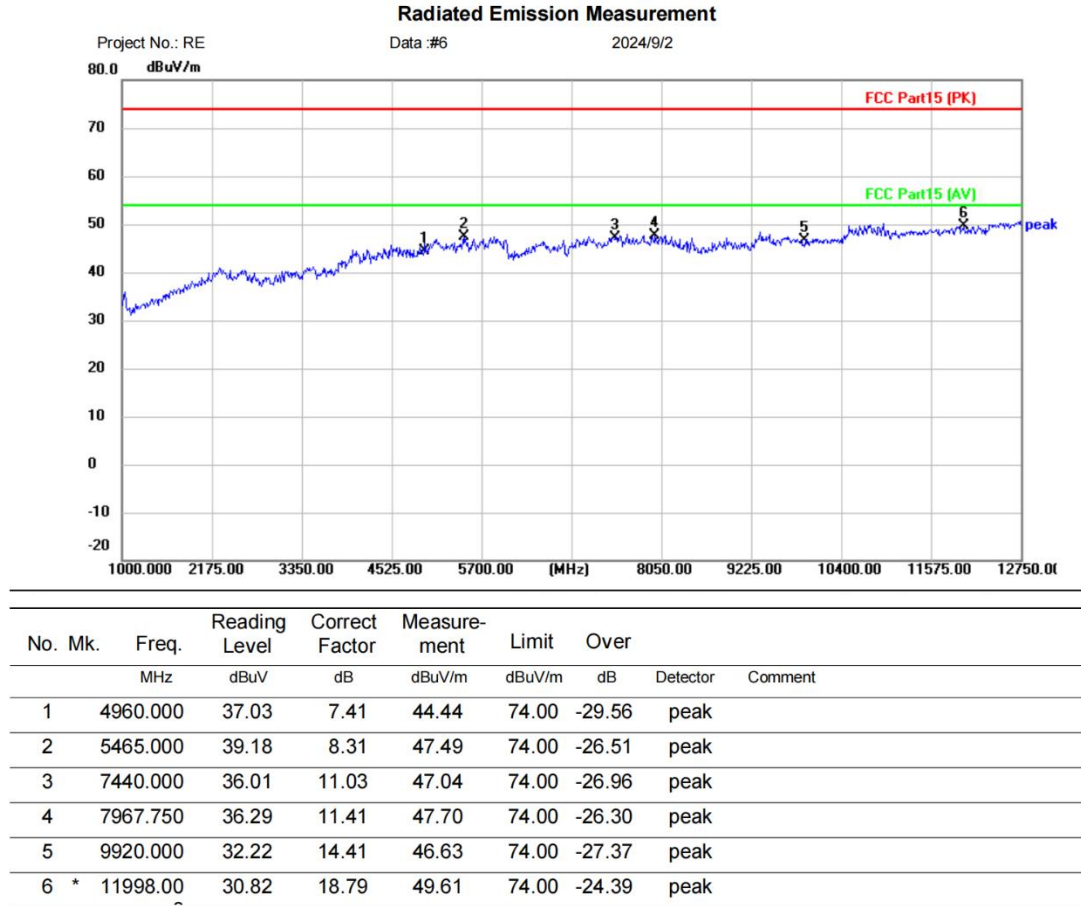

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

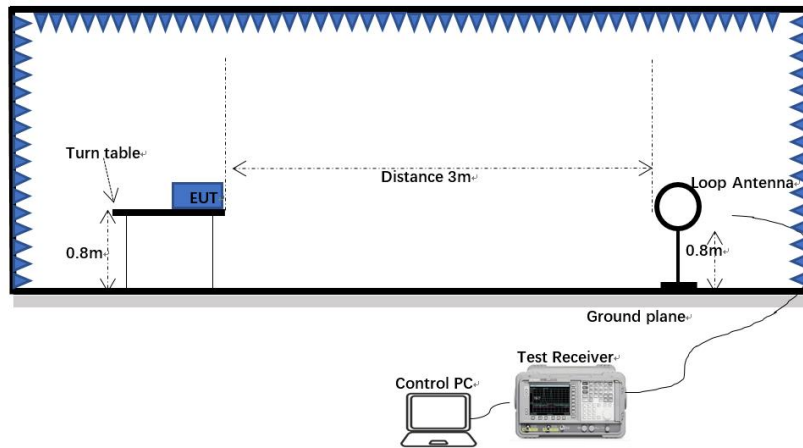

30MHz-1GHz:

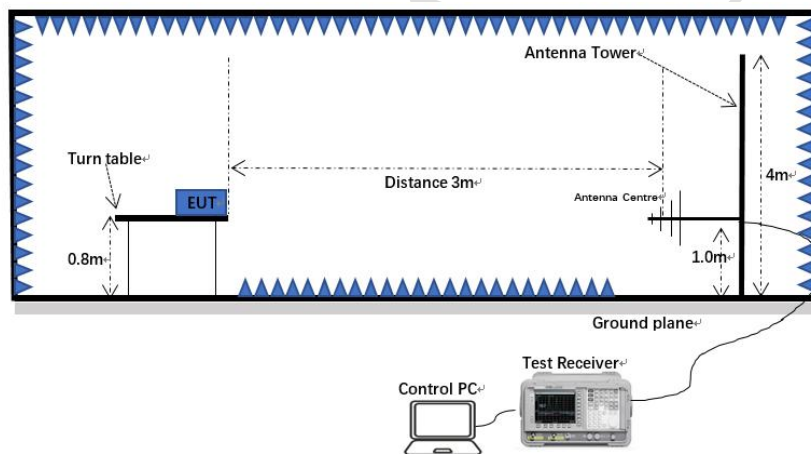

Above 1GHz:

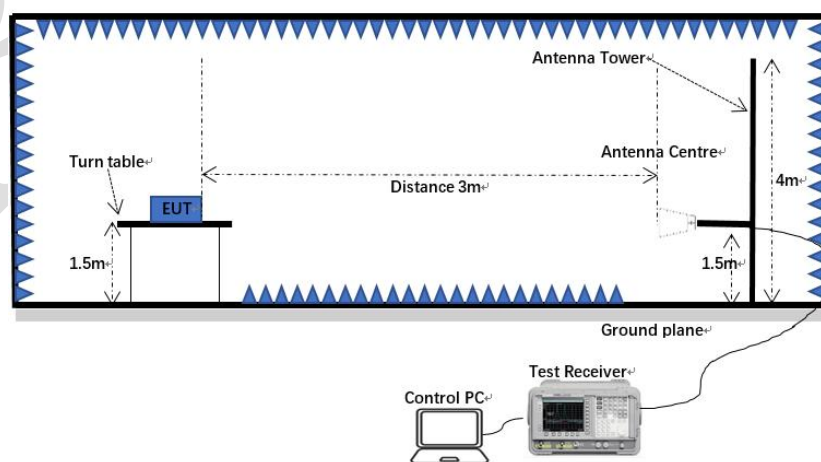

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. all modes have been tested, and only the worst mode is showed in the report.

6.11.4 Test data


Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the 8DPSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

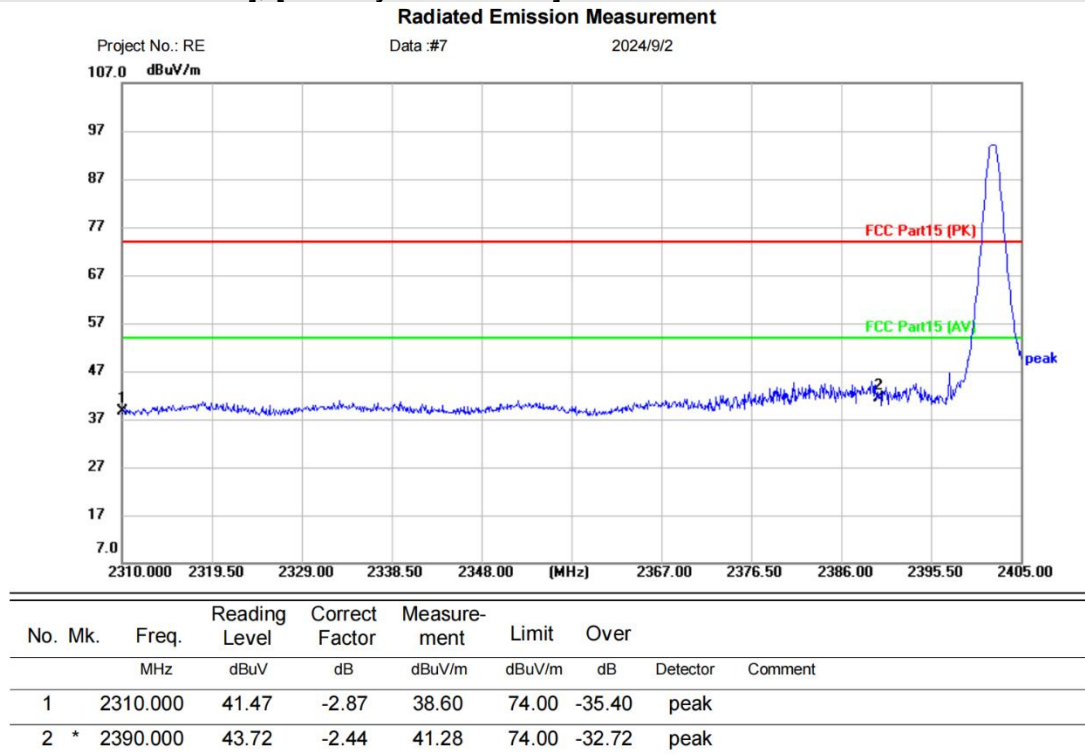


Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]

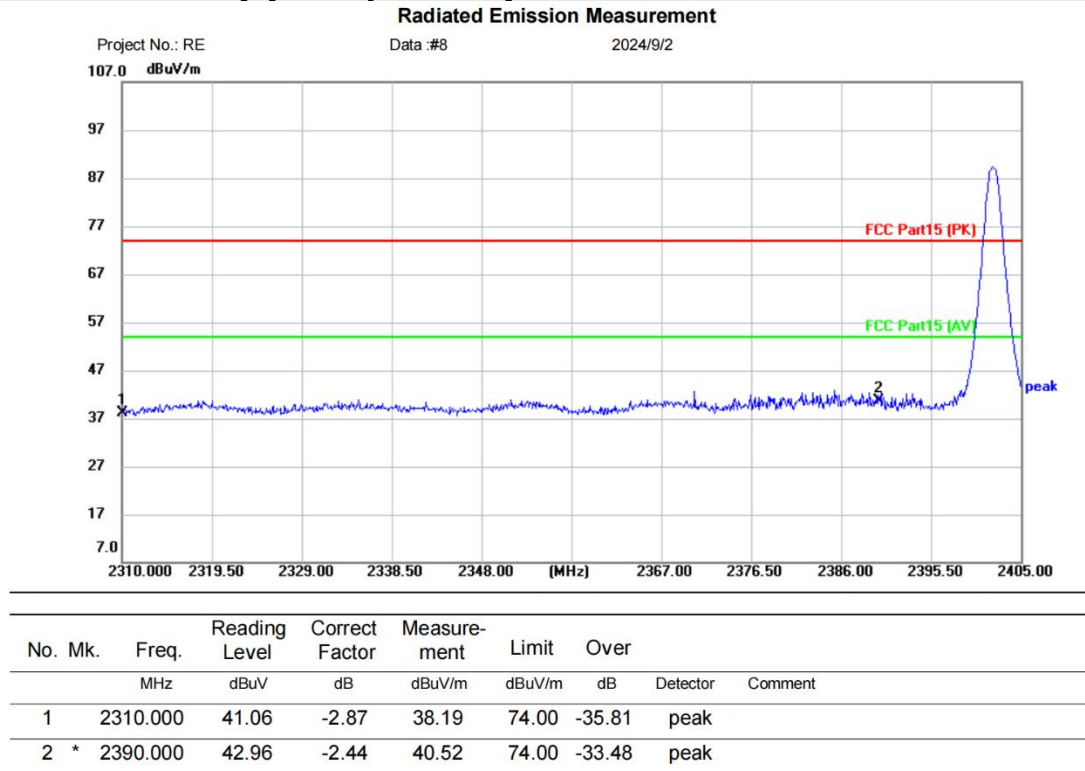

Test Result: Pass


[Test mode: TX High channel]; [Polarity: Horizontal]

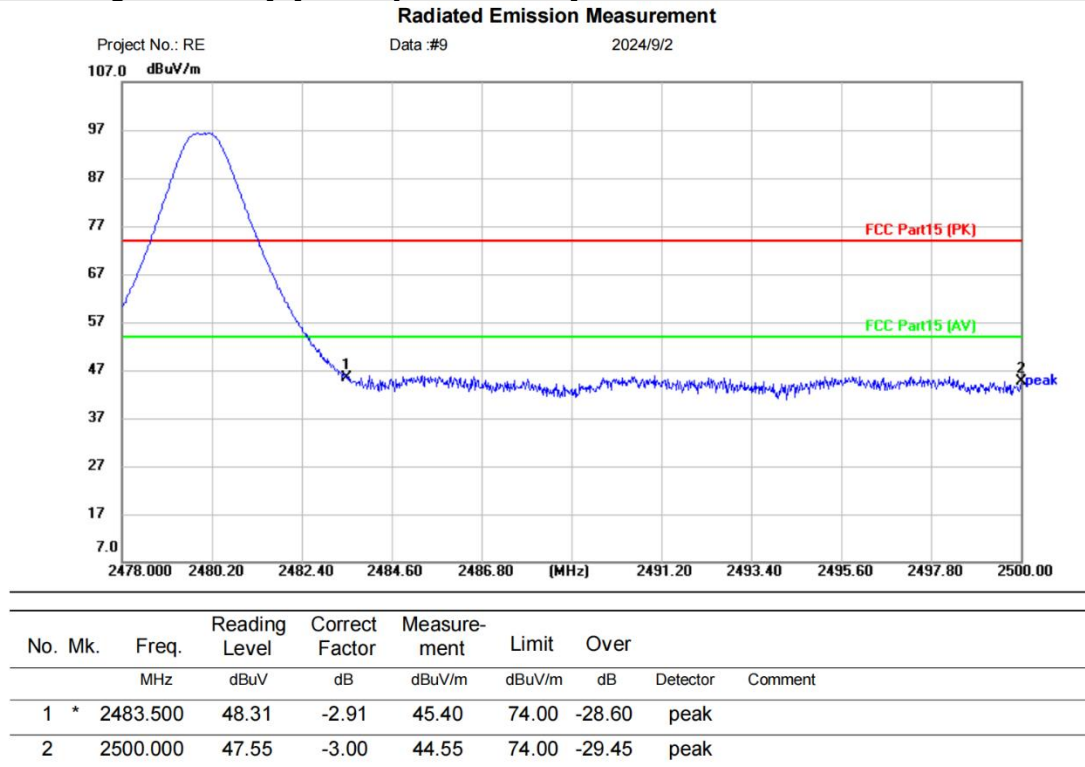

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

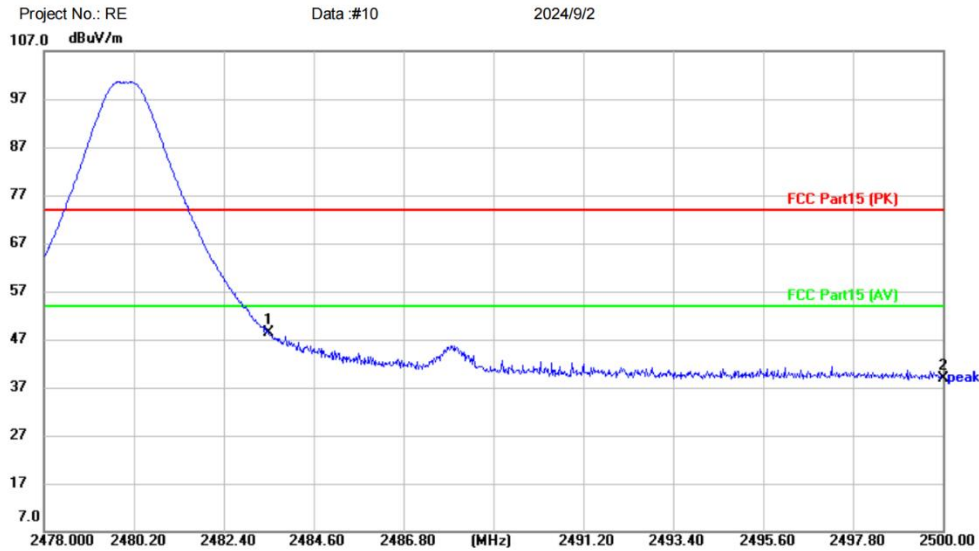

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	51.25	-2.91	48.34	74.00	-25.66	peak	
2		2500.000	41.85	-3.00	38.85	74.00	-35.15	peak	


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	10.486	21	Pass
NVNT	1-DH1	2441	Ant1	10.625	21	Pass
NVNT	1-DH1	2480	Ant1	9.896	21	Pass
NVNT	2-DH1	2402	Ant1	11.72	21	Pass
NVNT	2-DH1	2441	Ant1	11.831	21	Pass
NVNT	2-DH1	2480	Ant1	11.149	21	Pass
NVNT	3-DH1	2402	Ant1	11.751	21	Pass
NVNT	3-DH1	2441	Ant1	11.85	21	Pass
NVNT	3-DH1	2480	Ant1	11.178	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

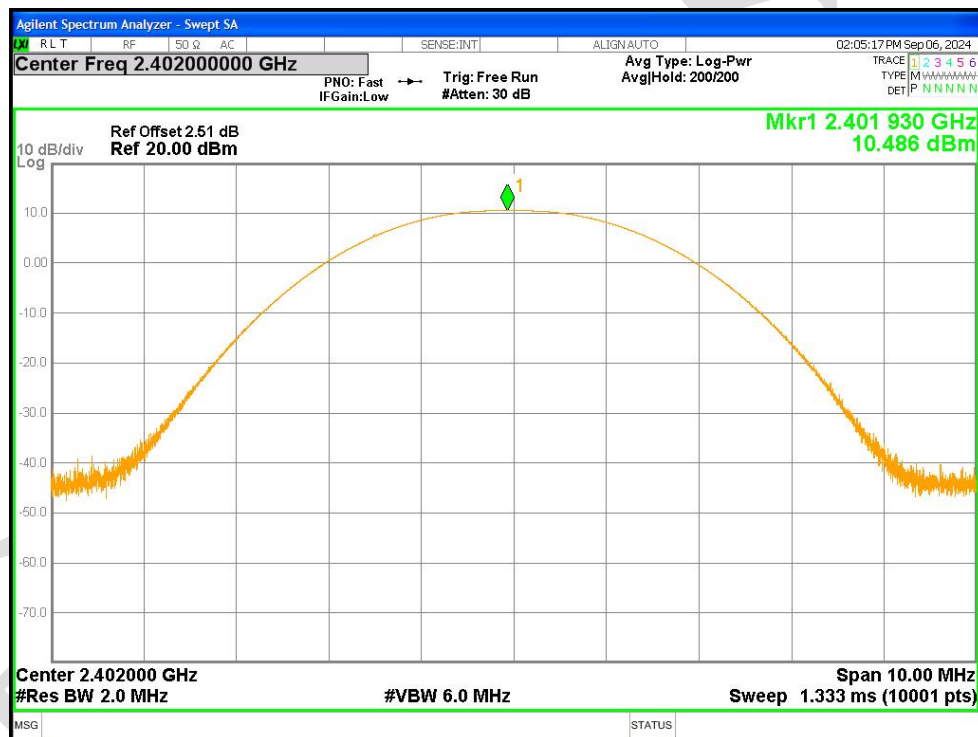


Power NVNT 1-DH1 2441MHz Ant1

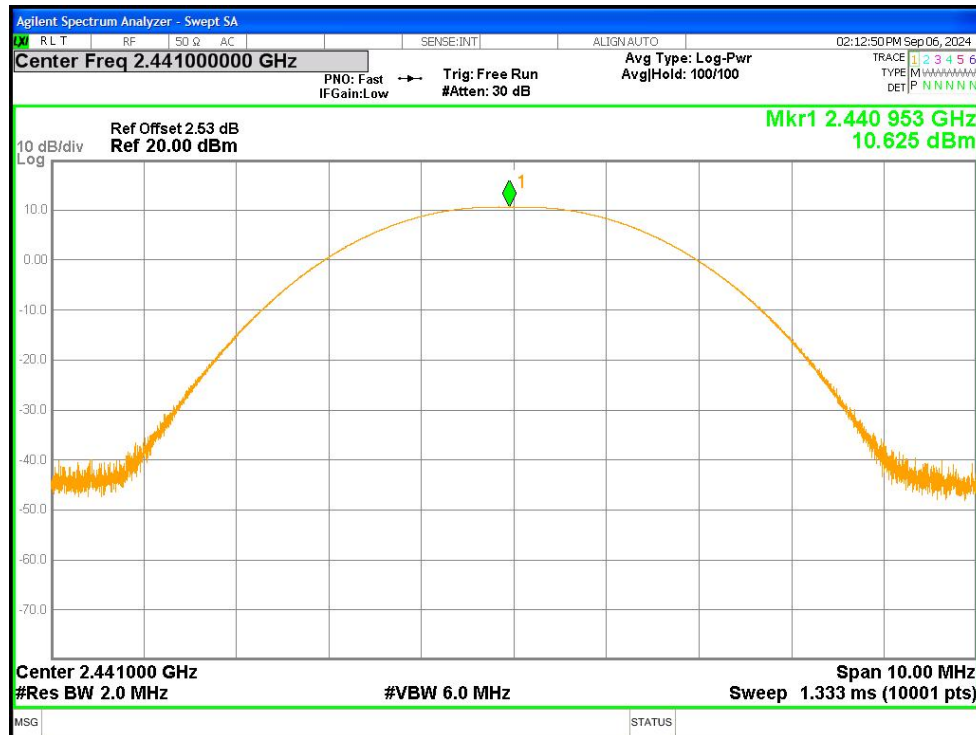


Power NVNT 1-DH1 2480MHz Ant1

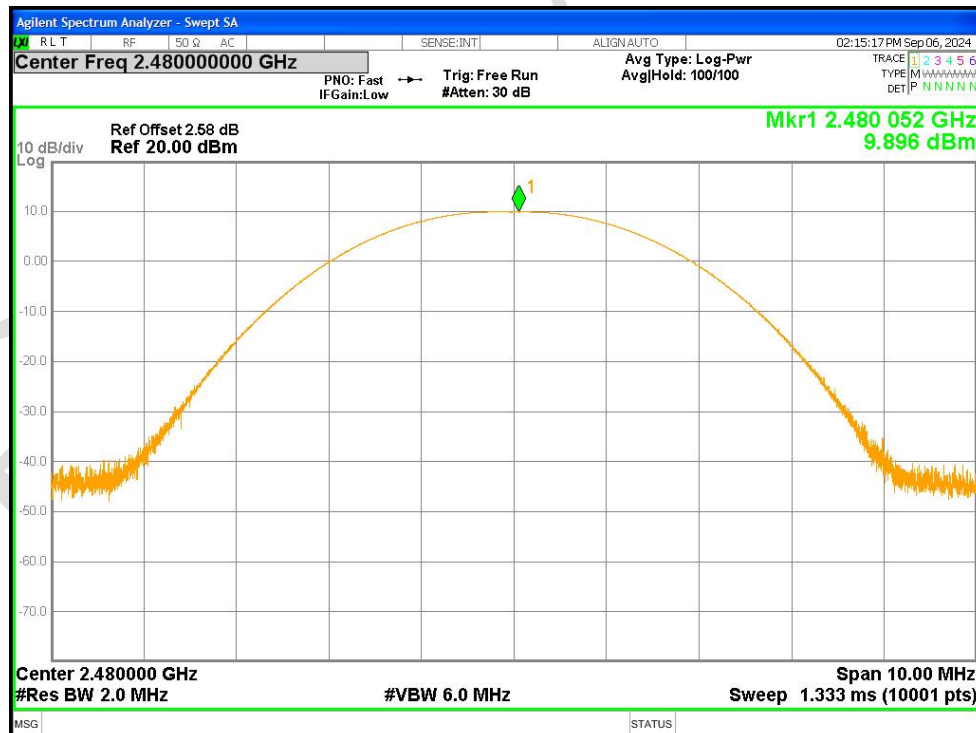


Power NVNT 2-DH1 2402MHz Ant1

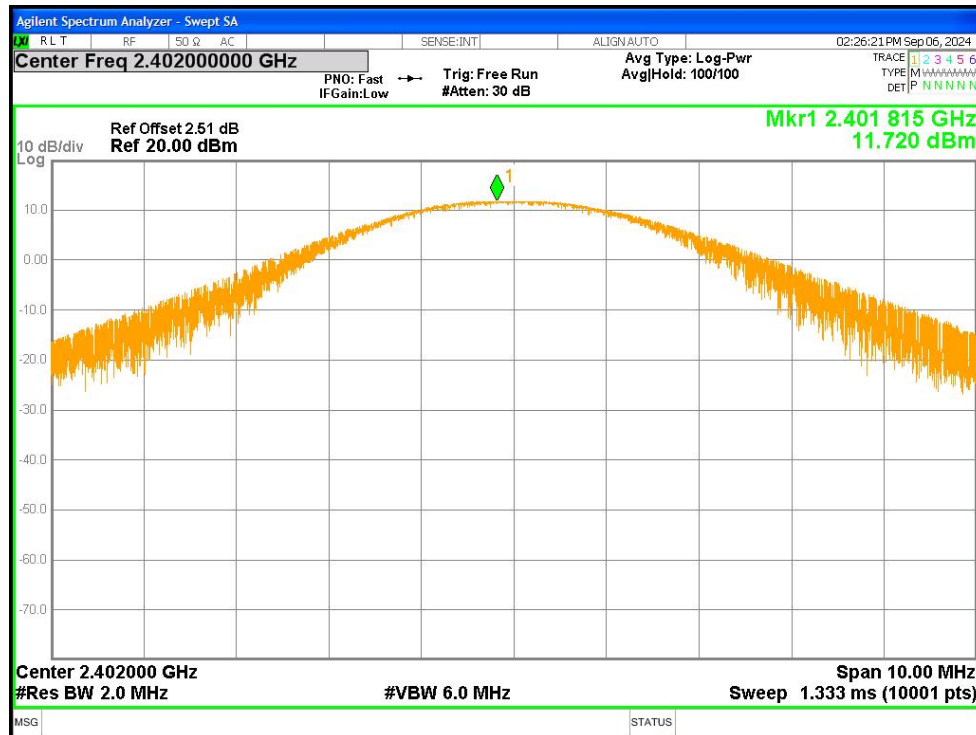


Power NVNT 2-DH1 2441MHz Ant1

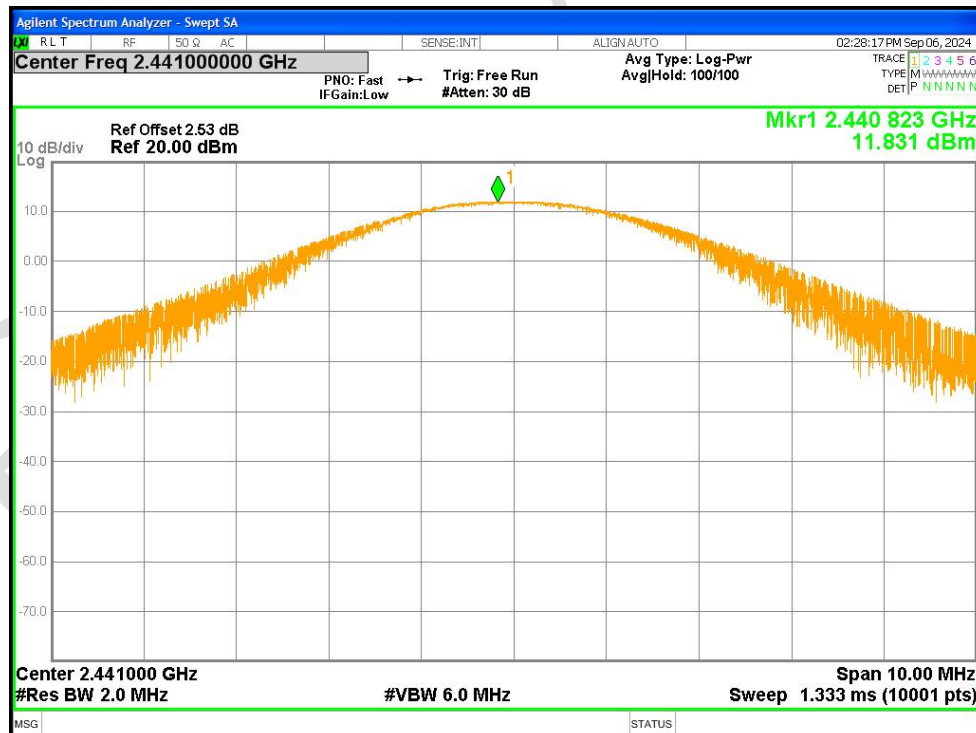


Power NVNT 2-DH1 2480MHz Ant1

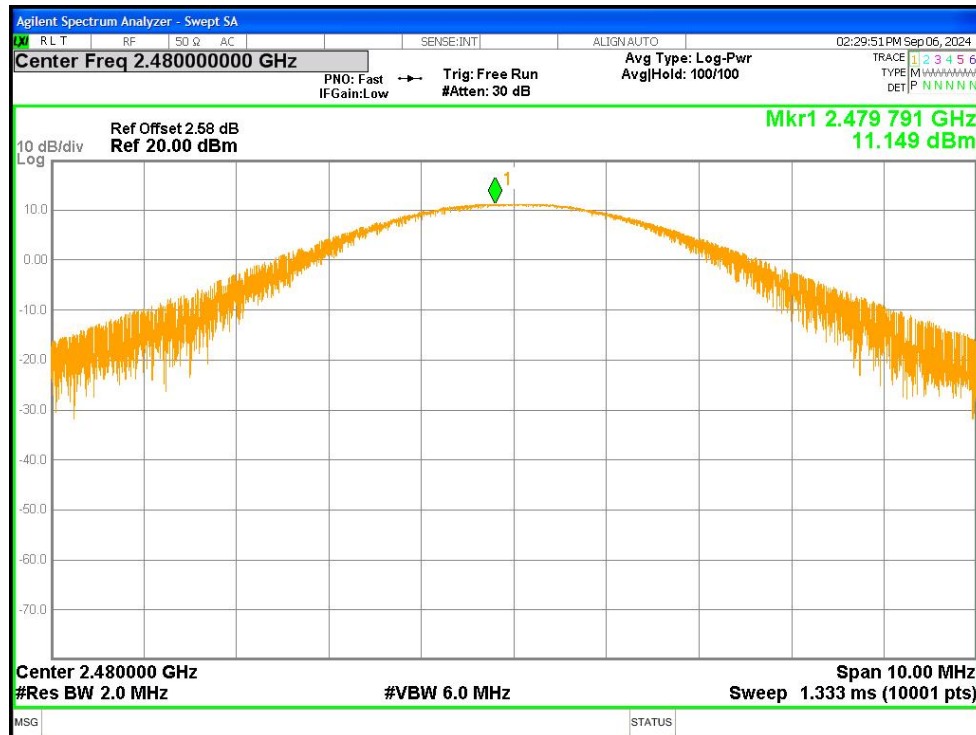


Power NVNT 3-DH1 2402MHz Ant1

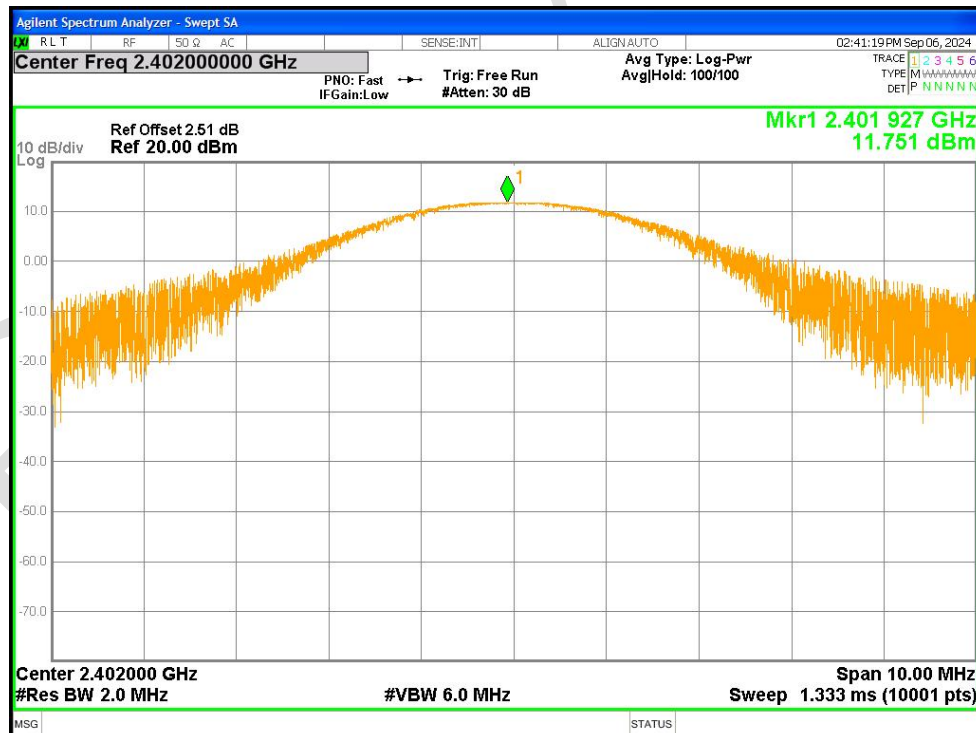

Power NVNT 3-DH1 2441MHz Ant1

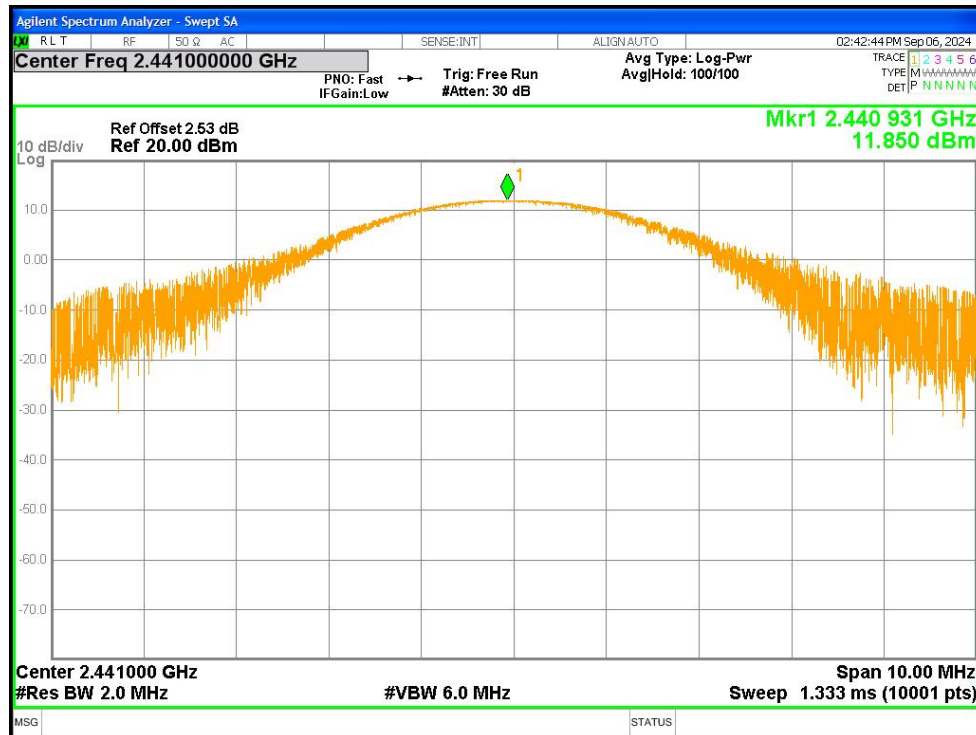


Power NVNT 3-DH1 2480MHz Ant1

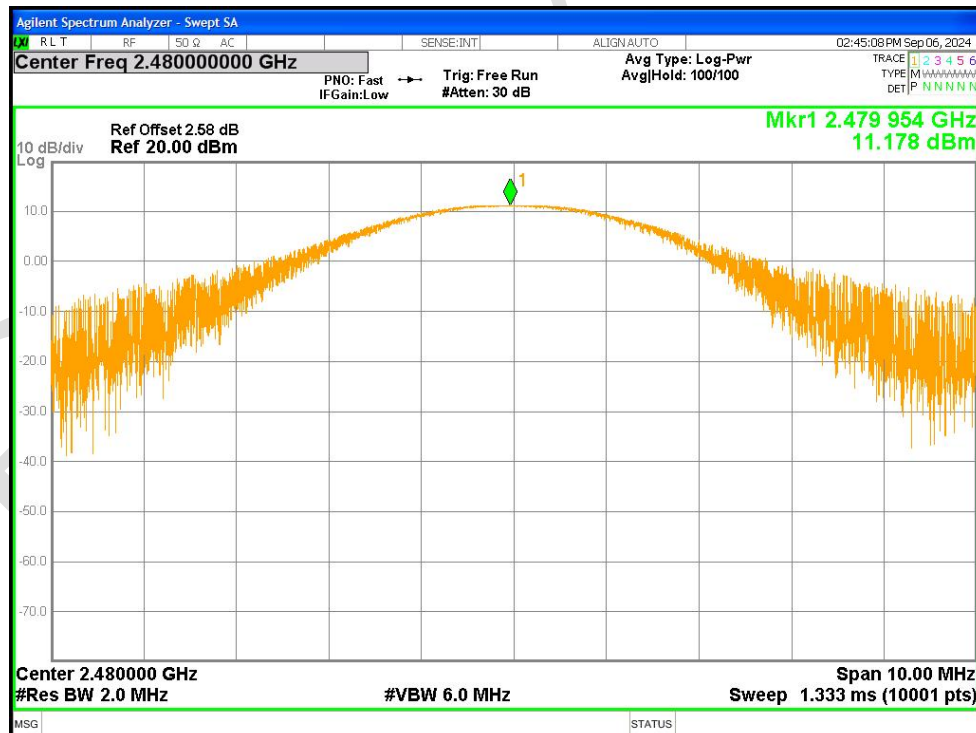


7.2 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.922	Pass
NVNT	1-DH1	2441	Ant1	0.921	Pass
NVNT	1-DH1	2480	Ant1	0.922	Pass
NVNT	2-DH1	2402	Ant1	1.312	Pass
NVNT	2-DH1	2441	Ant1	1.308	Pass
NVNT	2-DH1	2480	Ant1	1.314	Pass
NVNT	3-DH1	2402	Ant1	1.291	Pass
NVNT	3-DH1	2441	Ant1	1.297	Pass
NVNT	3-DH1	2480	Ant1	1.297	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

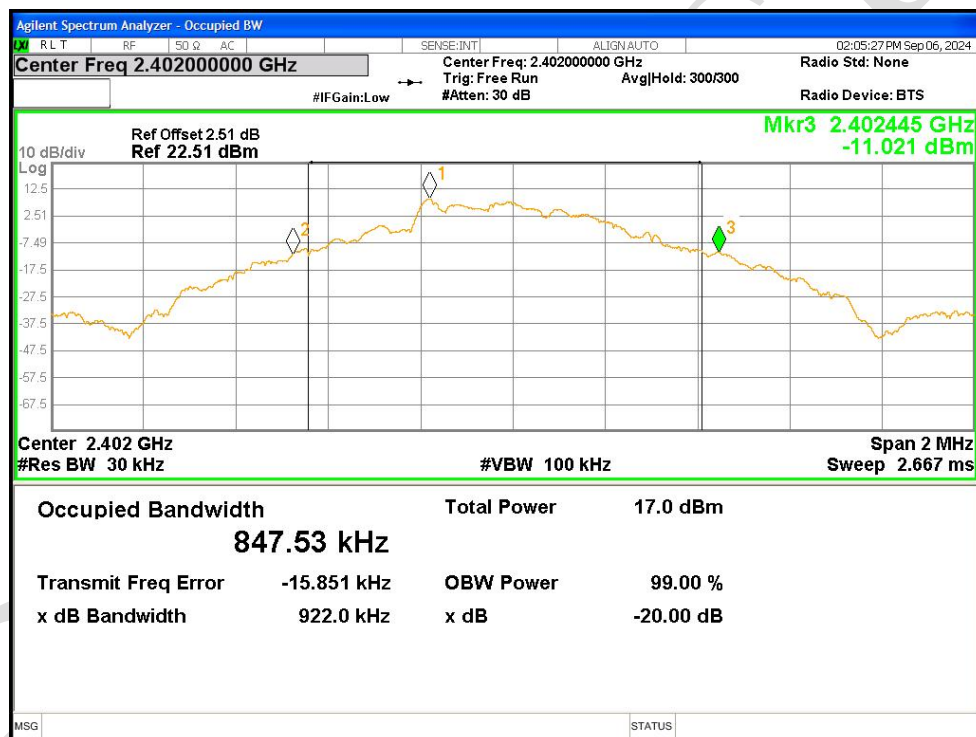


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

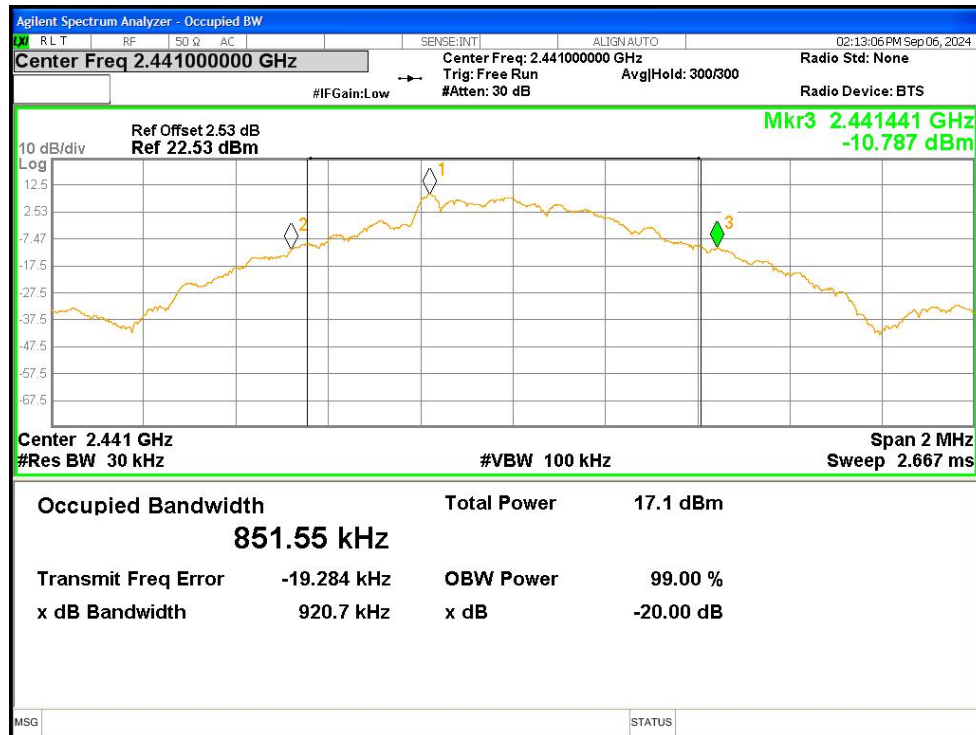


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

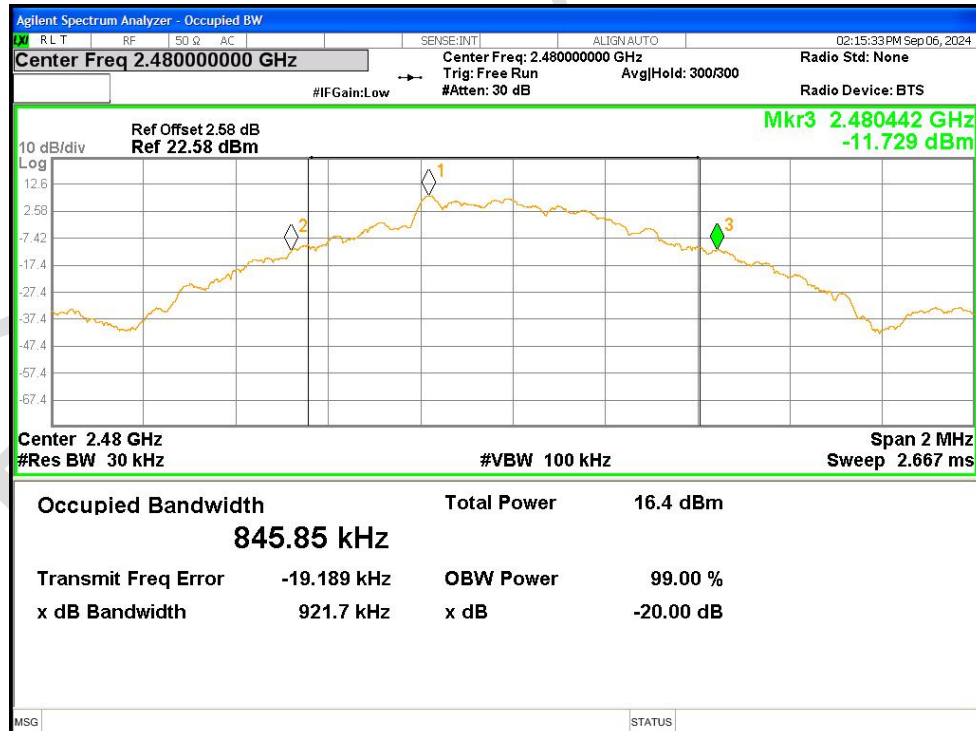

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

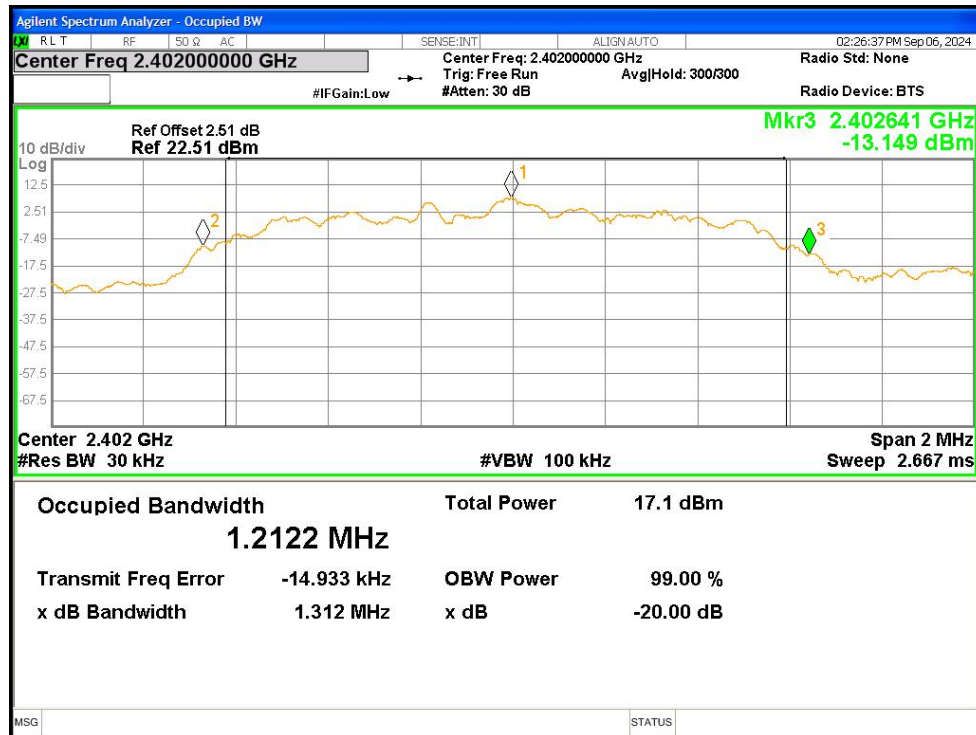

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

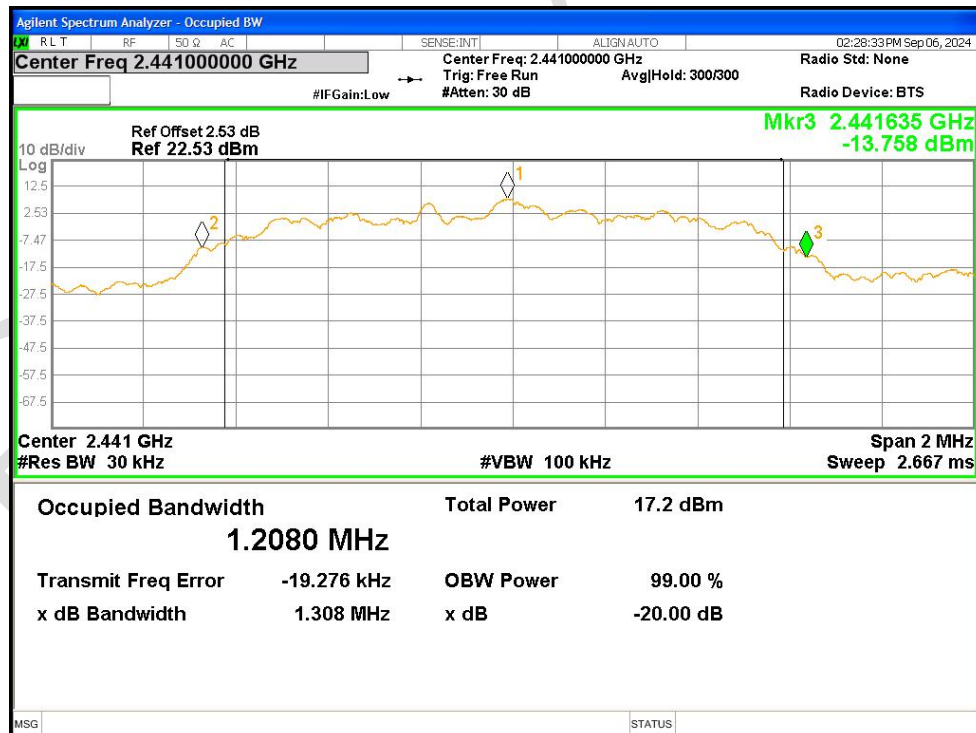

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1